

APPLICATION FOR CERTIFICATION

On Behalf of

Apple Inc.

Apple iBeacon

Model No. : A1573

Brand : Apple

FCC ID : BCGA1573

Prepared for

Apple Inc.

1 Infinite Loop, Cupertino, Ca 95014

Prepared by

Audix Technology (Wujiang) Co., Ltd. EMC Dept.

No. 1289 Jiangxing East Road, the Part of Wujiang Economic Development Zone
Jiangsu China 215200

Tel : +86-512-63403993

Fax : +86-512-63403339

Report Number : ACWE-F1405007

Date of Test : Apr.30~May 13, 2014

Date of Report : May 21, 2014

TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION	4
1. SUMMARY OF MEASUREMENTS AND RESULTS	5
2. GENERAL INFORMATION.....	6
2.1. Description of Device (EUT).....	6
2.2. Description of Test Facility	7
2.3. Measurement Uncertainty.....	7
3. CONDUCTED EMISSION MEASUREMET	8
3.1. Test Equipment	8
3.2. Block Diagram of Test Setup.....	8
3.3. Power line Conducted Emission Limit	8
3.4. Test Procedure	9
3.5. Conducted Emission Measurement Results.....	9
4. RADIATED EMISSION MEASUREMENT	16
4.1. Test Equipment	16
4.2. Block Diagram of Test Setup.....	16
4.3. Radiated Emission Limits.....	18
4.4. Test Procedure	18
4.5. Assessment In All Three Orthogonal Planes	19
4.6. Measurement Results	20
4.7. Restricted Bands Measurement Results (For Below 1GHz).....	21
4.8. Restricted Bands Measurement Results (For Above 1GHz)	25
4.9. Spurious Emission Measurement Results in Band Edge Emission (FCC Part 15, 15.205).....	29
5. 6 DB BANDWIDTH MEASUREMENT	37
5.1. Test Equipment.....	37
5.2. Block Diagram of Test Setup.....	37
5.3. Specification Limits (§15.247(a)(2))	37
5.4. Test Procedure	37
5.5. Test Results.....	37
6. MAXIMUM PEAK OUTPUT POWER MEASUREMENT	40
6.1. Test Equipment	40
6.2. Block Diagram of Test Setup.....	40
6.3. Specification Limits (§15.247(b)(3)).....	40
6.4. Test Procedure	40
6.5. Test Results.....	40
7. BAND EDGES MEASUREMENT	41
7.1. Test Equipment	41
7.2. Block Diagram of Test Setup.....	41
7.3. Specification Limits (§15.247(d)).....	41
7.4. Test Procedure	41
7.5. Test Results.....	41
8. POWER SPECTRAL DENSITY MEASUREMENT	43
8.1. Test Equipment	43
8.2. Block Diagram of Test Setup.....	43
8.3. Specification Limits (§15.247(e)).....	43
8.4. Test Procedure	43
8.5. Test Results.....	43

9. EMISSION LIMITATIONS MEASUREMENT	46
9.1. Test Equipment.....	46
9.2. Block Diagram of Test Setup.....	46
9.3. Specification Limits (§15.247(d)).....	46
9.4. Test Procedure	46
9.5. Test Results.....	47
10. DEVIATION TO TEST SPECIFICATIONS	57

TEST REPORT CERTIFICATION

Applicant : Apple Inc.
 Manufacturer : Apple Inc.
 EUT Description : Apple iBeacon
 FCC ID : BCGA1573
 (A) Model No. : A1573
 (B) Brand : Apple
 (C) Power Supply : DC 5V, 0.3A
 (D) Power Rating : DC 3.7V, 15mA

Applicable Standards:

FCC RULES AND REGULATIONS PART 15 SUBPART C, Oct. 2012**ANSI C63.4:2003****KDB 558074 D01 DTS Meas Guidance v03r01**

The device described above was tested by Audix Technology (Wujiang) Co., Ltd. EMC Dept. to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the FCC Part 15 subpart C section 15.207, 15.205, 15.209&15.247 limits.

The measurement results are contained in this test report and Audix Technology (Wujiang) Co., Ltd. EMC Dept. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliant with the FCC limits.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Wujiang) Co., Ltd. EMC Dept.

Date of Test: Apr.30~May 13, 2014

Date of Report: May 21, 2014

Prepared by :




(Emma Hu/Assistant Administrator)

Reviewer :



(Danny Sun/Deputy Section Manager)

Approved & Authorized Signer :

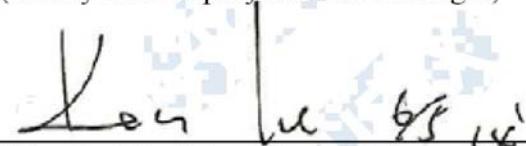

(Ken Lu/ Assistant General Manager)

1. SUMMARY OF MEASUREMENTS AND RESULTS

The EUT has been tested according to the applicable standards and test results are referred as below.

Description of Test Item	Standard	Results
CONDUCTED EMISSION	FCC 47 CFR Part 15 Subpart C/ Section 15.207 And ANSI C63.4-2003 And KDB 558074 D01 DTS Meas Guidance v03r01	PASS
RADIATED EMISSION	FCC 47 CFR Part 15 Subpart C/ Section 15.209& Section 15.205 And ANSI C63.4-2003 And KDB 558074 D01 DTS Meas Guidance v03r01	PASS
6 dB BANDWIDTH	FCC 47 CFR Part 15 Subpart C/ Section 15.247(a)(2) And ANSI C63.4-2003 And KDB 558074 D01 DTS Meas Guidance v03r01	PASS
MAXIMUM PEAK OUTPUT POWER	FCC 47 CFR Part 15 Subpart C/ Section 15.247(b)(3) And ANSI C63.4-2003 And KDB 558074 D01 DTS Meas Guidance v03r01	PASS
BAND EDGES	FCC 47 CFR Part 15 Subpart C/ Section 15.247(d) And ANSI C63.4-2003 And KDB 558074 D01 DTS Meas Guidance v03r01	PASS
POWER SPECTRAL DENSITY	FCC 47 CFR Part 15 Subpart C/ Section 15.247(e) And ANSI C63.4-2003 And KDB 558074 D01 DTS Meas Guidance v03r01	PASS
EMISSION LIMITATIONS	FCC 47 CFR Part 15 Subpart C/ Section 15.247(d) And ANSI C63.4-2003 And KDB 558074 D01 DTS Meas Guidance v03r01	PASS

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Description : Apple iBeacon
Model No. : A1573
FCC ID : BCGA1573
Brand : Apple
Applicant : Apple Inc.
1 Infinite Loop, Cupertino, Ca 95014
Manufacturer : Apple Inc.
1 Infinite Loop, Cupertino, Ca 95014
Modulation Type : GFSK
Antenna Gain : 4.32dBi
Fundamental Range : 2402 MHz -2480MHz
Tested Frequency : 2402MHz (Channel 0)
2440MHz (Channel 19)
2480MHz (Channel 39)
Highest Working Frequency : 2.4GHz
Date of Receipt of Sample : Feb.12, 2014
Date of Test : Apr.30~May 13, 2014

2.2. Description of Test Facility

Name of Firm	:	Audix Technology (Wujiang) Co., Ltd. EMC Dept.
Site Location	:	No. 1289 Jiangxing East Road, the Eastern Part of Wujiang Economic Development Zone Jiangsu China 215200
Test Facilities	:	No.1 Conducted Shielding Enclosure
		No.1 3m Semi-anechoic Chamber
		Date of Validity: May. 23, 2015
		FCC Registration No.: 897661
		IC Registration No.: 5183D-2
		RF Fully Chamber
NVLAP Lab Code	:	200786-0 (NVLAP is a NATA accredited body under Mutual Recognition Agreement) Valid until on Sep.30, 2014

2.3. Measurement Uncertainty

Test Item	Range Frequency	Uncertainty
Conducted Disturbance Measurement	0.15MHz ~ 30MHz	± 2.48dB
Radiated Disturbance Measurement (At 3m Chamber)	30MHz ~ 1000MHz	± 3.42dB
Radiated Disturbance Measurement (At 3m Chamber)	Above 1GHz	± 4.49dB

Remark: Uncertainty = $ku_c(y)$

Test Item	Uncertainty
6 dB Bandwidth	± 82.6kHz
Maximum Peak Output Power	± 0.88dB
Band Edges	± 0.74dB
Power Spectral Density	± 0.72dB
Emission Limitations	± 0.74dB


Remark: Uncertainty = $ku_c(y)$

3. CONDUCTED EMISSION MEASUREMET

3.1. Test Equipment

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Test Receiver	R & S	ESCI	100839	2014-01-05	2015-01-04
2.	A.M.N.	R & S	ESH2-Z5	100153	2013-05-17	2014-05-16
3.	L.I.S.N	Kyoritsu	KNW-407	8-1793-3	2013-08-06	2014-08-05
4.	Pulse Limiter	R&S	ESH3-Z2	100605	2013-08-06	2014-08-05
5.	RF Cable	Harbour Industries	RG400	003	2014-03-24	2015-03-23

3.2. Block Diagram of Test Setup

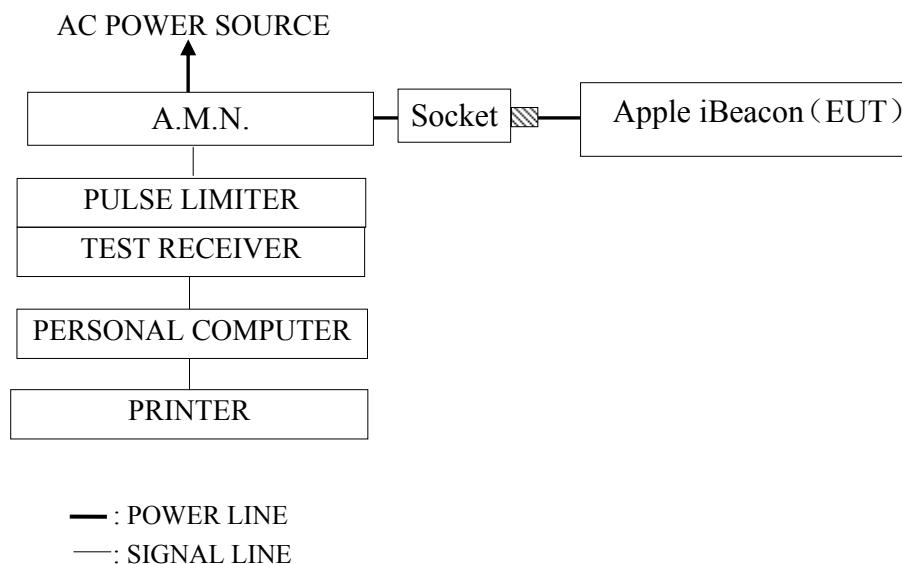

3.3. Power line Conducted Emission Limit

3.3.1. Power line Conducted Emission Limit (FCC Part 15, Section 15.207, Class B)

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level	Average Level
150kHz ~ 500kHz	66 ~ 56 dB μ V	56 ~ 46 dB μ V
500kHz ~ 5MHz	56 dB μ V	46 dB μ V
5MHz ~ 30MHz	60 dB μ V	50 dB μ V

Remark1: If the average limit is met when using a Quasi-Peak detector, the EUT shall be deemed to meet both limits and measurement with the average detector is unnecessary.

2: The lower limit applies at the band edges.

3.4. Test Procedure

The measuring process is according to ANSI C63.4-2003 and laboratory internal procedure TKC-301-015. (For FCC Part15 Subpart C)

In the conducted emission measurement, the EUT and all peripheral devices were set up on a non-metallic table which was 0.8 meters height above the ground plane, and 0.4 meters far away from the vertical plane. The EUT (installed in PC system) was powered by AC mains through Artificial Mains Network (A.M.N), other peripheral devices were powered by AC mains through the second Line Impedance Stabilization Network (L.I.S.N). For the measurement, the A.M.N measuring port was terminated by a 50Ω measuring equipment and the second L.I.S.N measuring port was terminated by a 50Ω resistive load. All measurements were done on the phase and neutral line of the EUT's power cord. All cables or wires placement were verified to find out the maximum emission.

The bandwidth of measuring receiver was set at 9 kHz.

The required frequency band (0.15 MHz ~ 30 MHz) was pre-scanned with peak detector, the final measurement was measured with quasi-peak detector and average detector. (If the average limit is met when using a quasi-peak detector, the average detector is necessary).

The emission level is calculated automatically by the test system which uses the following equation:

Emission level (dB μ V) = Meter-Reading (dB μ V) + A.M.N factor (dB) + Cable loss (dB).
(Cable loss include pulse limiter loss)

3.5. Conducted Emission Measurement Results

3.5.1. Conducted Emission Measurement Results (For FCC Part15 Subpart C)

PASSED.

(All the emissions not reported below are too low against the prescribed limits.)

EUT was performed during this section testing and all the test results are attached in next pages.

Test Date : May 13, 2014 Temperature : 20.8°C Humidity : 51%


Mode	Test Condition	Reference Test Data No.	
		Neutral	Line
1	CH 0	※# 1	# 2
2	CH 19	# 3	# 4
3	CH 39	# 5	# 6

NOTE 1 - '※'means the worst test mode.

NOTE 2- The worst emission is detected at 0.17 MHz with emission level of 53.22 dB (μ V) and with QP detector (Limit is 65.21 dB (μ V)), when the Neutral of the EUT is connected to AMN.



Audix Technology (Wu Jiang) Co.,Ltd
 No.1289, Jiang Xing East Road, The Eastern Part of WuJiang
 Economic Development Zone, JiangSu, China
 Tel : (0512) 63403993 Fax: (0512) 63403339

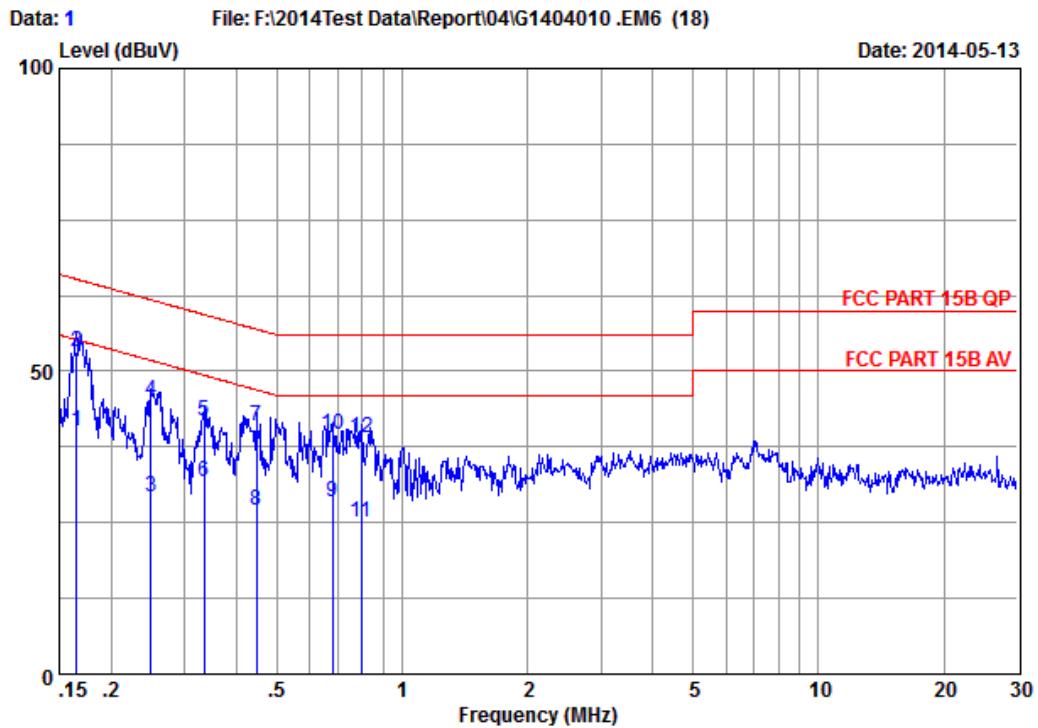

Site no. : No.1 Conducted shielding Enclosure Data no. : 1
 AMN/LISN : ESH2-Z5-1305 Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Env. / Ins. : 20.8*C&51%ESCI Engineer : KM Tong
 EUT : Apple iBeacon
 M/N : A1573
 Power Rating : 120Vac/60Hz
 Test mode : TX CHO 2402MHz
 Memo :

Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.17	0.18	9.86	30.07	40.11	55.21	15.10 Average
2	0.17	0.18	9.86	43.18	53.22	65.21	11.99 QP
3	0.25	0.18	9.86	19.16	29.20	51.78	22.58 Average
4	0.25	0.18	9.86	35.06	45.10	61.78	16.68 QP
5	0.33	0.19	9.86	31.87	41.92	59.35	17.43 QP
6	0.33	0.19	9.86	21.66	31.71	49.35	17.64 Average
7	0.45	0.19	9.87	31.01	41.07	56.93	15.86 QP
8	0.45	0.19	9.87	17.02	27.08	46.93	19.85 Average
9	0.68	0.20	9.87	18.45	28.52	46.00	17.48 Average
10	0.68	0.20	9.87	29.56	39.63	56.00	16.37 QP
11	0.80	0.20	9.88	15.01	25.09	46.00	20.91 Average
12	0.80	0.20	9.88	29.02	39.10	56.00	16.90 QP

1. Emission Level = AMN Factor + Cable Loss + Reading.

2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.




Audix Technology (Wu Jiang) Co.,Ltd
 No.1289, Jiang Xing East Road, The Eastern Part of WuJiang
 Economic Development Zone, JiangSu, China
 Tel : (0512) 63403993 Fax: (0512) 63403339

Data: 2

File: F:\2014Test Data\Report\04\G1404010.EM6 (18)

Date: 2014-05-13

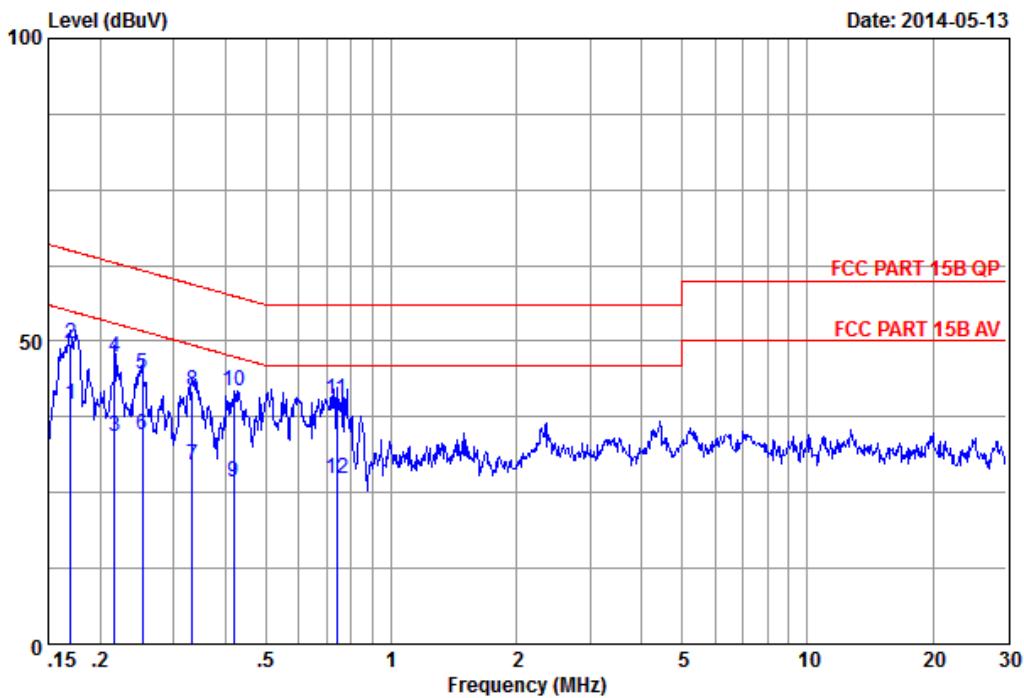

Site no. : No.1 Conducted shielding Enclosure Data no. : 2
 AMN/LISN : ESH2-Z5-1305 Phase : LINE
 Limit : FCC PART 15B QP
 Env. / Ins. : 20.8*C&51%ESCI Engineer : KM Tong
 EUT : Apple iBeacon
 M/N : A1573
 Power Rating : 120Vac/60Hz
 Test mode : TX CHO 2402MHz
 Memo :

Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.17	0.23	9.87	29.51	39.61	54.99	15.38 Average
2	0.17	0.23	9.87	39.61	49.71	64.99	15.28 QP
3	0.22	0.25	9.87	24.02	34.14	52.96	18.82 Average
4	0.22	0.25	9.87	37.13	47.25	62.96	15.71 QP
5	0.25	0.26	9.86	34.55	44.67	61.69	17.02 QP
6	0.25	0.26	9.86	24.45	34.57	51.69	17.12 Average
7	0.33	0.27	9.86	19.54	29.67	49.40	19.73 Average
8	0.33	0.27	9.86	31.64	41.77	59.40	17.63 QP
9	0.42	0.29	9.87	16.60	26.76	47.46	20.70 Average
10	0.42	0.29	9.87	31.70	41.86	57.46	15.60 QP
11	0.74	0.34	9.88	30.04	40.26	56.00	15.74 QP
12	0.74	0.34	9.88	17.14	27.36	46.00	18.64 Average

1. Emission Level = AMN Factor + Cable Loss + Reading.

2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.




Audix Technology (Wu Jiang) Co.,Ltd
 No.1289, Jiang Xing East Road, The Eastern Part of WuJiang
 Economic Development Zone, JiangSu, China
 Tel : (0512) 63403993 Fax: (0512) 63403339

Data: 3

File: F:\2014Test Data\Report\04\G1404010.EM6 (18)

Date: 2014-05-13

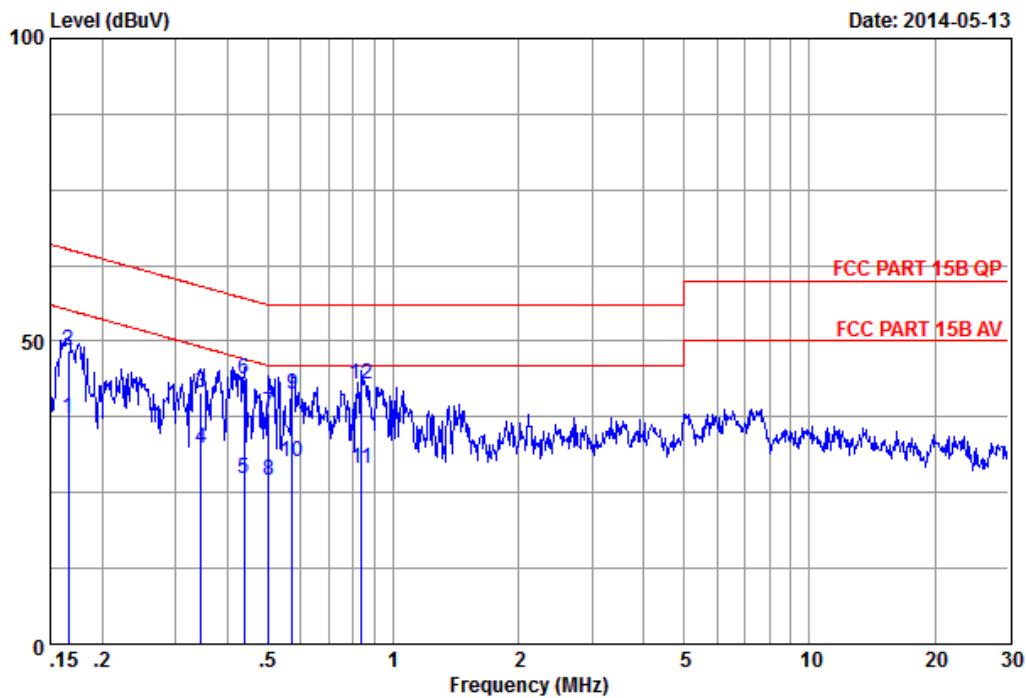

Site no. : No.1 Conducted shielding Enclosure Data no. : 3
 AMN/LISN : ESH2-Z5-1305 Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Env. / Ins. : 20.8*C&51%ESCI Engineer : KM Tong
 EUT : Apple iBeacon
 M/N : A1573
 Power Rating : 120Vac/60Hz
 Test mode : TX CH19 2440MHz
 Memo :

Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.17	0.18	9.86	27.41	37.45	55.16	Average
2	0.17	0.18	9.86	38.52	48.56	65.16	QP
3	0.34	0.19	9.86	31.49	41.54	59.09	QP
4	0.34	0.19	9.86	22.38	32.43	49.09	Average
5	0.44	0.19	9.87	17.29	27.35	47.11	Average
6	0.44	0.19	9.87	33.73	43.79	57.11	QP
7	0.50	0.19	9.87	28.19	38.25	56.00	QP
8	0.50	0.19	9.87	17.09	27.15	46.00	Average
9	0.57	0.19	9.87	31.11	41.17	56.00	QP
10	0.57	0.19	9.87	20.01	30.07	46.00	Average
11	0.84	0.20	9.88	18.84	28.92	46.00	Average
12	0.84	0.20	9.88	32.95	43.03	56.00	QP

1. Emission Level = AMN Factor + Cable Loss + Reading.

2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.




Audix Technology (Wu Jiang) Co.,Ltd
 No.1289, Jiang Xing East Road, The Eastern Part of WuJiang
 Economic Development Zone, JiangSu, China
 Tel : (0512) 63403993 Fax: (0512) 63403339

Data: 4

File: F:\2014Test Data\Report\04\G1404010.EM6 (18)

Date: 2014-05-13

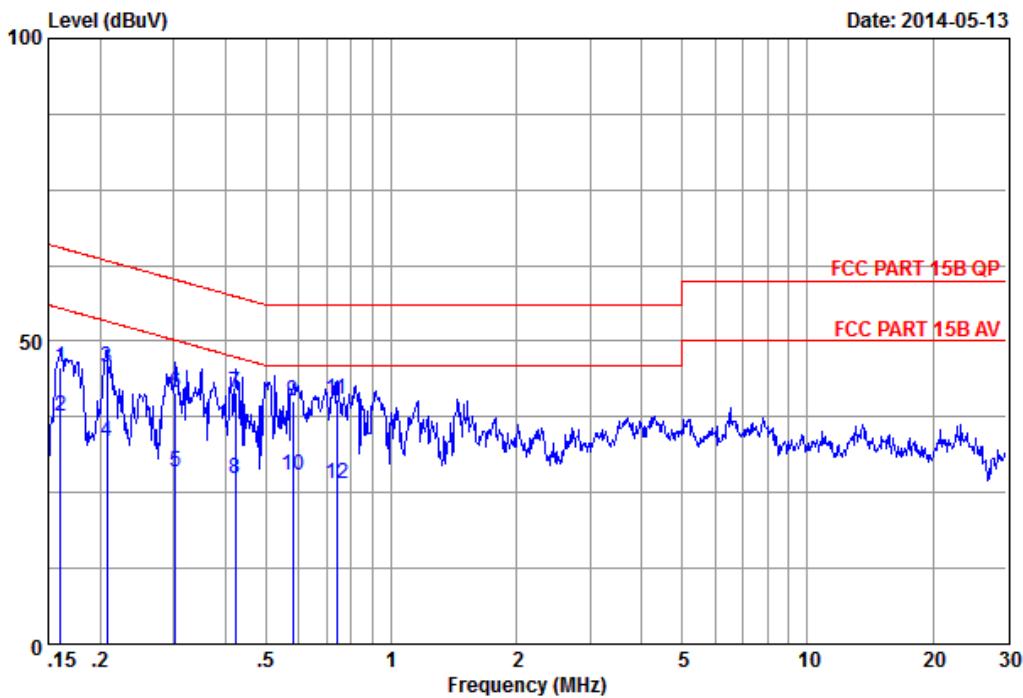

Site no. : No.1 Conducted shielding Enclosure Data no. : 4
 AMN/LISN : ESH2-Z5-1305 Phase : LINE
 Limit : FCC PART 15B QP
 Env. / Ins. : 20.8*C&51%ESCI Engineer : KM Tong
 EUT : Apple iBeacon
 M/N : A1573
 Power Rating : 120Vac/60Hz
 Test mode : TX CH19 2440MHz
 Memo :

Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.16	0.23	9.86	35.71	45.80	65.43	QP
2	0.16	0.23	9.86	27.61	37.70	55.43	Average
3	0.21	0.24	9.87	35.44	45.55	63.32	QP
4	0.21	0.24	9.87	23.33	33.44	53.32	Average
5	0.30	0.27	9.86	18.15	28.28	50.15	21.87
6	0.30	0.27	9.86	31.25	41.38	60.15	QP
7	0.42	0.29	9.87	31.37	41.53	57.42	QP
8	0.42	0.29	9.87	17.27	27.43	47.42	Average
9	0.58	0.32	9.87	29.83	40.02	56.00	QP
10	0.58	0.32	9.87	17.73	27.92	46.00	Average
11	0.74	0.34	9.88	30.22	40.44	56.00	QP
12	0.74	0.34	9.88	16.12	26.34	46.00	Average

1. Emission Level = AMN Factor + Cable Loss + Reading.

2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.




Audix Technology (Wu Jiang) Co.,Ltd
 No.1289, Jiang Xing East Road, The Eastern Part of WuJiang
 Economic Development Zone, JiangSu, China
 Tel : (0512) 63403993 Fax: (0512) 63403339

Data: 5

File: F:\2014Test Data\Report\04\G1404010.EM6 (18)

Date: 2014-05-13

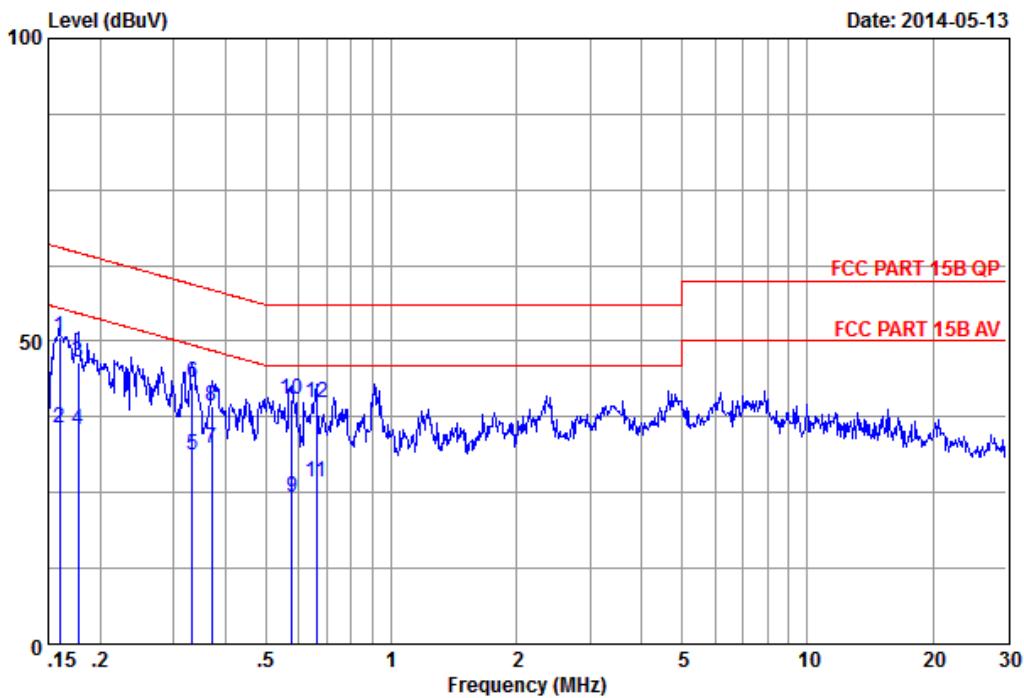

Site no. : No.1 Conducted shielding Enclosure Data no. : 5
 AMN/LISN : ESH2-Z5-1305 Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Env. / Ins. : 20.8*C&51%ESCI Engineer : KM Tong
 EUT : Apple iBeacon
 M/N : A1573
 Power Rating : 120Vac/60Hz
 Test mode : TX CH39 2480MHz
 Memo :

Freq. (MHz)	AMN (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.16	0.18	9.86	40.64	50.68	14.79	QP
2	0.16	0.18	9.86	25.53	35.57	55.47	Average
3	0.18	0.18	9.87	36.48	46.53	64.64	18.11
4	0.18	0.18	9.87	25.37	35.42	54.64	19.22
5	0.33	0.19	9.86	21.19	31.24	49.40	18.16
6	0.33	0.19	9.86	33.09	43.14	59.40	16.26
7	0.37	0.19	9.86	22.24	32.29	48.47	16.18
8	0.37	0.19	9.86	29.35	39.40	58.47	19.07
9	0.58	0.19	9.87	14.24	24.30	46.00	21.70
10	0.58	0.19	9.87	30.44	40.50	56.00	15.50
11	0.66	0.20	9.87	16.58	26.65	46.00	19.35
12	0.66	0.20	9.87	29.69	39.76	56.00	16.24

1. Emission Level = AMN Factor + Cable Loss + Reading.

2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.




Audix Technology (Wu Jiang) Co.,Ltd
 No.1289, Jiang Xing East Road, The Eastern Part of WuJiang
 Economic Development Zone, JiangSu, China
 Tel : (0512) 63403993 Fax:(0512) 63403339

Data: 6

File: F:\2014Test Data\Report\04\G1404010.EM6 (18)

Date: 2014-05-13

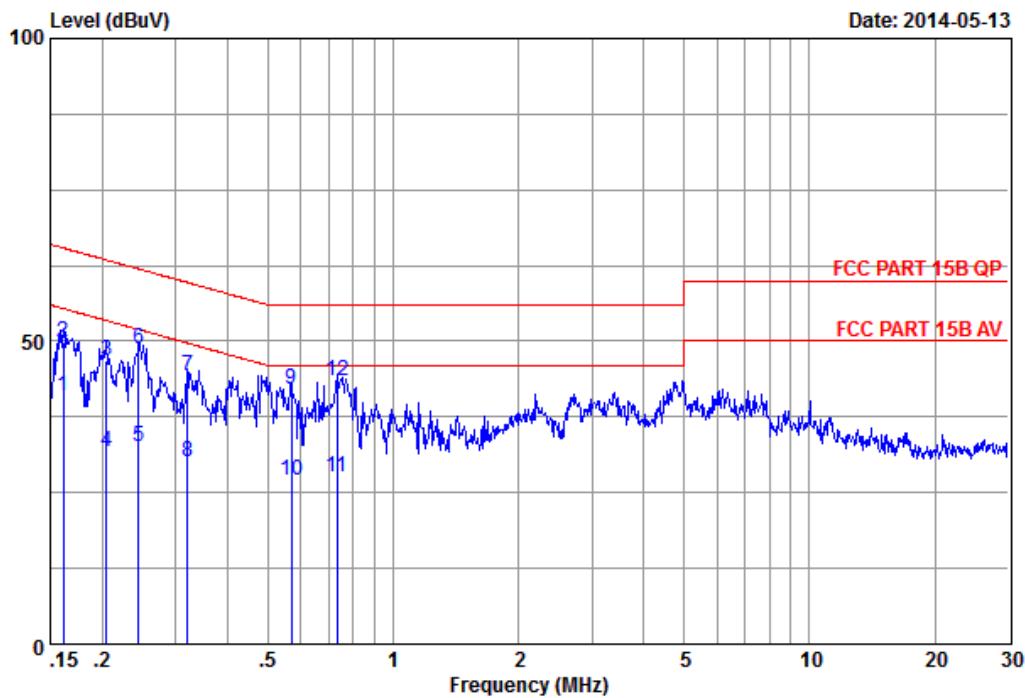

Site no. : No.1 Conducted shielding Enclosure Data no. : 6
 AMN/LISN : ESH2-Z5-1305 Phase : LINE
 Limit : FCC PART 15B QP
 Env. / Ins. : 20.8*C&51%ESCI Engineer : KM Tong
 EUT : Apple iBeacon
 M/N : A1573
 Power Rating : 120Vac/60Hz
 Test mode : TX CH39 2480MHz
 Memo :

Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1 0.16	0.23	9.86	30.76	40.85	55.38	14.53	Average
2 0.16	0.23	9.86	39.87	49.96	65.38	15.42	QP
3 0.21	0.24	9.87	36.82	46.93	63.40	16.47	QP
4 0.21	0.24	9.87	21.71	31.82	53.40	21.58	Average
5 0.24	0.25	9.86	22.44	32.55	51.95	19.40	Average
6 0.24	0.25	9.86	38.54	48.65	61.95	13.30	QP
7 0.32	0.27	9.86	34.15	44.28	59.71	15.43	QP
8 0.32	0.27	9.86	20.05	30.18	49.71	19.53	Average
9 0.57	0.32	9.87	31.89	42.08	56.00	13.92	QP
10 0.57	0.32	9.87	16.78	26.97	46.00	19.03	Average
11 0.73	0.34	9.88	17.24	27.46	46.00	18.54	Average
12 0.73	0.34	9.88	33.34	43.56	56.00	12.44	QP

1. Emission Level= AMN Factor + Cable Loss + Reading.

2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

4. RADIATED EMISSION MEASUREMENT

4.1. Test Equipment

The following test equipment was used during the radiated emission measurement:
At 3m Semi-Anechoic Chamber


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Preamplifier	Agilent	8449B	2944A10921	2013-08-14	2014-08-13
2.	Preamplifier	Agilent	8447D	2944A10921	2013-08-14	2014-08-13
3.	PXA Signal Analyzer	Agilent	N9030A	MY53120367	2013-06-24	2014-06-23
4.	Bi-log Antenna	Schaffner	CBL6112D	22253	2013-05-30	2014-05-29
5.	Horn Antenna	EMCO	3115	62960	2013-05-07	2014-05-06
6.	Test Receiver	R&S	ESCI	100361	2014-01-05	2015-01-04
7.	RF Cable #1	Yuhang CSYH	cable-3m	001(0.5m)	2013-08-13	2014-08-12
8.	RF Cable #2	Yuhang CSYH	cable-3m	002(0.5m)	2013-08-13	2014-08-12
9.	RF Cable #3	Yuhang CSYH	cable-3m	003(3.0m)	2013-08-13	2014-08-12

4.2. Block Diagram of Test Setup


4.2.1. Block Diagram of Test Setup between EUT and simulators

Apple iBeacon (EUT)

4.2.2. No. 1 3m Semi-Anechoic Chamber Setup Diagram (Test distance:3m) for 30-1000MHz

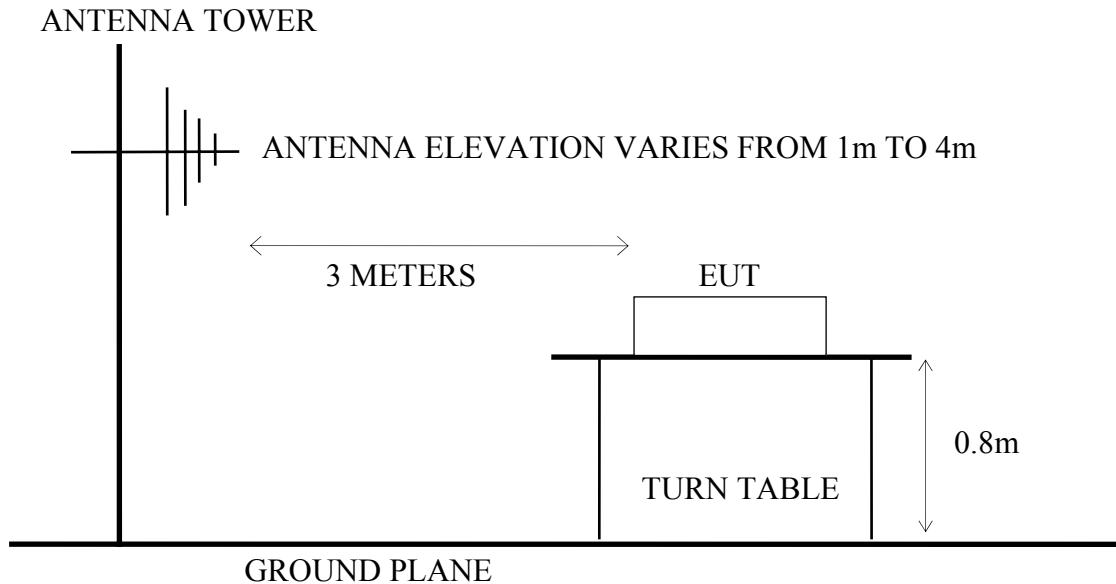

4.2.3. No. 1 3m Semi-Anechoic Chamber Setup Diagram (Test distance: 3m) for above 1GHz

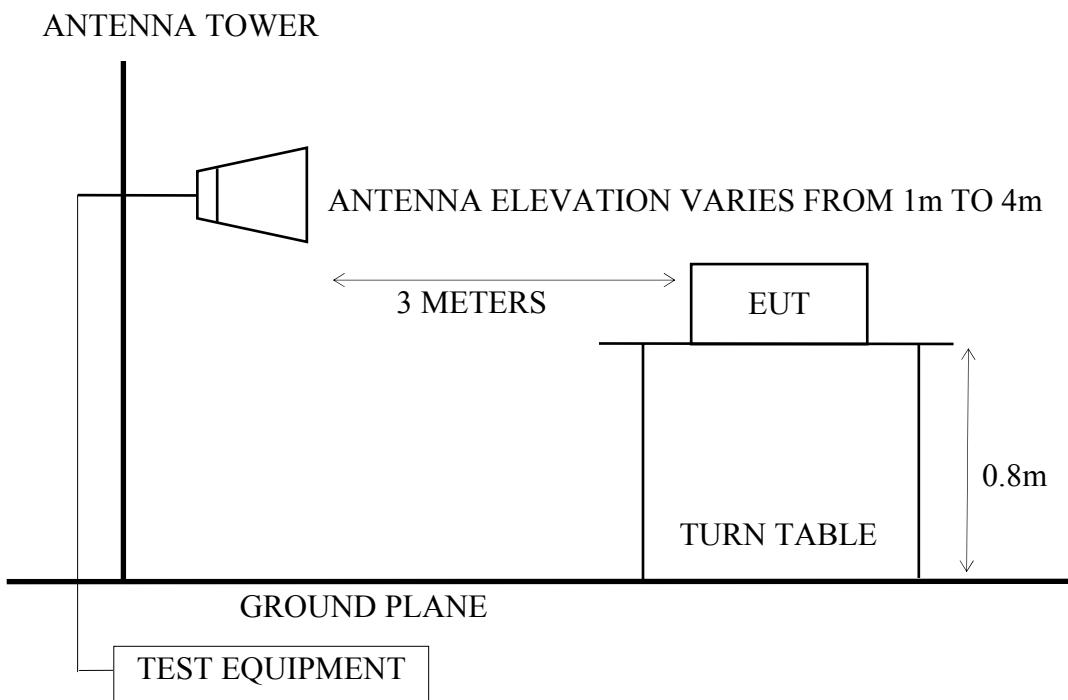

4.3. Radiated Emission Limits

Radiated Emission Limits (FCC Part15 C, section 15.209, CISPR22)

Frequency MHz	Distance Meters	Field Strengths Limits	
		dB μ V/m	
30 ~ 230	10	30.0	
230 ~ 1000	10	37.0	
Above 1000	3	74.0 dB μ V/m (Peak) 54.0 dB μ V/m (Average)	

Remark : (1) Emission level (dB μ V/m) = 20 log Emission level (μ V/m)

(2) The tighter limit applies at the edge between two frequency bands.

4.4. Test Procedure

The measuring process is according to ANSI C63.4-2003 and laboratory internal procedure TKC-301-024. (For FCC Part15 Subpart C)

In the radiated disturbance measurement, the EUT and all simulators were set up on a non-metallic turn table which was 0.8 meters above the ground plane. Measurement distance between EUT and receiving antennas was set at 10 meters at 30MHz~1000MHz and 3 meters at above 1GHz. The specified distance is the distance between the antennas and the closest periphery of EUT. During the radiated measurement, the EUT was rotated 360° and receiving antennas were moved from 1 ~ 4 meters for finding maximum emission. Two receiving antennas were used for both horizontal and vertical polarization detection for 30MHz~1GHz, One receiving antennas was used for both horizontal and vertical polarization detection for above 1GHz (the absorbing material was added when testing of above 1GHz was done). All cables or wires placement were verified to find out the maximum emission.

The bandwidth of measuring receiver (or spectrum analyzer) was set to:

RBW (120 kHz), VBW (300 kHz) for QP detector below 1GHz

RBW (1 MHz), VBW (1MHz) for Peak detector above 1GHz

RBW (1 MHz), VBW (1MHz) for AV detector above 1GHz

The required frequency band (30 MHz ~ 12000 MHz) was pre-scanned with peak detector; all final measurements were measured with quasi-peak detector below 1GHz, measured with average detector and peak detector above 1GHz.

The emission level is calculated automatically by the test system which uses the following equation :

1. For 30-1000MHz measurement:

Emission Level (dB μ V/m) = Meter-Reading (dB μ V)+Antenna Factor (dB/m)+Cable Loss (dB)

2. For Above 1GHz measurement:

Emission Level (dB μ V/m) = Meter-Reading (dB μ V)+Antenna Factor (dB/m)+Cable Loss(dB)
-Pre-amplifier factor (dB)

4.5. Assessment In All Three Orthogonal Planes

The position of EUT relative to in all three orthogonal plans in the radiated test.

After assessment in all three orthogonal planes, when choosing Channel 0 test in the radiation, found tha YZ Plan is the worst mode in Horizontal and XY plan is the worst mode in Vertical, so in the test of radiation, all with YZ plan (in Horizontal) & XY plan (in Vertical) mode test, refer to the following specific data.

Test Mode:XY Plan

Polarization	Frequency (MHz)	Reading dB (μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μ V/m)	Limits dB (μ V/m)	Margin (dB)	Remark
Horizontal	2402.15	102.38	28.19	6.49	35.06	102.00	74.00	-28.00	Peak
Vertical	2402.20	104.82	28.19	6.49	35.06	104.44	74.00	-30.44	Peak

Test Mode:XZ Plan

Polarization	Frequency (MHz)	Reading dB (μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μ V/m)	Limits dB (μ V/m)	Margin (dB)	Remark
Horizontal	2402.16	102.29	28.19	6.49	35.06	101.91	74.00	-27.91	Peak
Vertical	2402.20	101.66	28.19	6.49	35.06	101.28	74.00	-27.28	Peak

Test Mode:YZ Plan

Polarization	Frequency (MHz)	Reading dB (μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μ V/m)	Limits dB (μ V/m)	Margin (dB)	Remark
Horizontal	2402.15	104.18	28.19	6.49	35.06	103.80	74.00	-29.80	Peak
Vertical	2402.21	102.51	28.19	6.49	35.06	102.13	74.00	-28.13	Peak

4.6. Measurement Results

PASSED

(All the emissions not reported below are too low against the prescribed limits.)

4.6.1. For Restricted Bands:

The EUT was tested in restricted bands and all the test results are listed in section 4.7 & 4.8.
(The restricted bands defined in part 15.205(a))

For Frequency range: below 1GHz

No.	Test Mode and Frequency	Reference Test Data No.	
		Horizontal	Vertical
1.	Transmitting	2402MHz (Channel 0)	# 1
2.		2440MHz (Channel 19)	# 3
3.		2480MHz (Channel 39)	# 5
4.	Receiving	# 13	# 14

For Frequency range: above 1GHz

No.	Test Mode and Frequency	Reference Test Data No.	
		Horizontal	Vertical
1.	Transmitting	2402MHz (Channel 0)	# 7
2.		2440MHz (Channel 19)	# 9
3.		2480MHz (Channel 39)	# 11
4.	Receiving	# 15	# 16

4.6.2. For Band Edge Emission

The EUT was tested in restricted bands and all the test results are listed in section 4.9. The restricted bands defined in part 15.205(a))

No.	Test Mode and Frequency	Reference Test Data No.	
		Horizontal	Vertical
1.	Transmitting	2402MHz (Channel 0)	# 17, # 19
2.		2480MHz (Channel 39)	# 21, # 23
			# 18, # 20
			# 22, # 24

4.7. Restricted Bands Measurement Results (For Below 1GHz)



Audix Technology(Wujiang)Co.,Ltd.
No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
Economic Development Zone,JiangSu,China
Tel: (0512) 63403993 Fax: (0512) 63403993

Site NO. : 3m Semi-Anechoic Chamber Data NO. : 1
Dis. / Ant. : 3m 6112D(22253)-1305-3M Ant. pol. : HORIZONTAL
Limit : FCC PART 15 CLASS B
Env. / Ins. : 21.1*C&51%ESCI Engineer : boqiang_li
EUT : Apple iBeacon
M/N : A1573
Power Rating: DC 3.7V
Test Mode : TX CHO 2402MHz
Memo :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission		Margin (dB)	Remark
					Level (dBuV/m)	Limits (dBuV/m)		
1 51.34	8.40	0.45	41.19	27.38	22.66	40.00	17.34	QP
2 126.03	13.00	0.73	39.54	26.94	26.33	43.50	17.17	QP
3 225.94	11.00	1.16	44.58	26.50	30.24	46.00	15.76	QP
4 544.10	19.00	1.80	33.85	27.63	27.02	46.00	18.98	QP
5 665.35	19.70	2.02	35.31	27.47	29.56	46.00	16.44	QP
6 749.74	20.50	2.16	34.36	27.34	29.68	46.00	16.32	QP

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
Economic Development Zone,JiangSu,China
Tel: (0512) 63403993 Fax: (0512) 63403993

Site NO. : 3m Semi-Anechoic Chamber Data NO. : 2
Dis. / Ant. : 3m 6112D(22253)-1305-3M Ant. pol. : VERTICAL
Limit : FCC PART 15 CLASS B
Env. / Ins. : 21.1*C&51%ESCI Engineer : boqiang_li
EUT : Apple iBeacon
M/N : A1573
Power Rating: DC 3.7V
Test Mode : TX CHO 2402MHz
Memo :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission		Margin (dB)	Remark
					Level (dBuV/m)	Limits (dBuV/m)		
1 66.86	6.80	0.44	46.06	27.28	26.02	40.00	13.98	QP
2 126.03	13.00	0.73	40.57	26.94	27.36	43.50	16.14	QP
3 396.66	16.47	1.53	40.91	26.97	31.94	46.00	14.06	QP
4 538.28	18.60	1.80	39.59	27.63	32.36	46.00	13.64	QP
5 663.41	19.70	2.03	37.55	27.50	31.78	46.00	14.22	QP
6 756.53	20.60	2.14	34.07	27.32	29.49	46.00	16.51	QP

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
Economic Development Zone,JiangSu,China
Tel: (0512) 63403993 Fax: (0512) 63403993

Site NO. : 3m Semi-Anechoic Chamber Data NO. : 3
Dis. / Ant. : 3m 6112D(22253)-1305-3M Ant. pol. : HORIZONTAL
Limit : FCC PART 15 CLASS B Engineer : boqiang_li
Env. / Ins. : 21.1*C&51%/ESCI
EUT : Apple iBeacon
M/N : A1573
Power Rating: DC 3.7V
Test Mode : TX CH19 2440MHz
Memo :

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	126.03	13.00	0.73	40.87	26.94	27.66	43.50	15.84 QP
2	230.79	11.30	1.09	44.75	26.49	30.65	46.00	15.35 QP
3	296.75	13.90	1.33	39.15	26.38	28.00	46.00	18.00 QP
4	365.62	15.70	1.45	36.09	26.75	26.49	46.00	19.51 QP
5	667.29	19.70	2.03	34.09	27.47	28.35	46.00	17.65 QP
6	750.71	20.53	2.16	34.35	27.34	29.70	46.00	16.30 QP

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official
limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
Economic Development Zone,JiangSu,China
Tel: (0512) 63403993 Fax: (0512) 63403993

Site NO. : 3m Semi-Anechoic Chamber Data NO. : 4
Dis. / Ant. : 3m 6112D(22253)-1305-3M Ant. pol. : VERTICAL
Limit : FCC PART 15 CLASS B Engineer : boqiang_li
Env. / Ins. : 21.1*C&51%/ESCI
EUT : Apple iBeacon
M/N : A1573
Power Rating: DC 3.7V
Test Mode : TX CH19 2440MHz
Memo :

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	67.83	6.80	0.45	45.39	27.27	25.37	40.00	14.63 QP
2	164.83	10.60	0.89	43.62	26.75	28.36	43.50	15.14 QP
3	295.78	13.90	1.34	40.81	26.37	29.68	46.00	16.32 QP
4	354.95	15.80	1.36	39.20	26.69	29.67	46.00	16.33 QP
5	519.85	18.20	1.72	38.80	27.59	31.13	46.00	14.87 QP
6	757.50	20.60	2.13	33.46	27.31	28.88	46.00	17.12 QP

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official
limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
No.1289, Jiang Xing East Road, The Eastern Part of Wu Jiang
Economic Development Zone, JiangSu, China
Tel: (0512) 63403993 Fax: (0512) 63403993

Site NO. : 3m Semi-Anechoic Chamber Data NO. : 5
Dis. / Ant. : 3m 6112D(22253)-1305-3M Ant. pol. : HORIZONTAL
Limit : FCC PART 15 CLASS B Engineer : boqiang_li
Env. / Ins. : 21.1*C&51%ESCI
EUT : Apple iBeacon
M/N : A1573
Power Rating: DC 3.7V
Test Mode : TX CH39 2480MHz
Memo :

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	50.37	9.00	0.45	39.46	27.38	21.53	40.00	18.47 QP
2	128.94	12.90	0.75	39.93	26.93	26.65	43.50	16.85 QP
3	238.55	12.10	1.07	42.78	26.47	29.48	46.00	16.52 QP
4	304.51	14.07	1.30	40.97	26.42	29.92	46.00	16.08 QP
5	358.83	15.80	1.46	38.96	26.72	29.50	46.00	16.50 QP
6	746.83	20.45	2.17	31.97	27.35	27.24	46.00	18.76 QP

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official
limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
No.1289, Jiang Xing East Road, The Eastern Part of Wu Jiang
Economic Development Zone, JiangSu, China
Tel: (0512) 63403993 Fax: (0512) 63403993

Site NO. : 3m Semi-Anechoic Chamber Data NO. : 6
Dis. / Ant. : 3m 6112D(22253)-1305-3M Ant. pol. : VERTICAL
Limit : FCC PART 15 CLASS B Engineer : boqiang_li
Env. / Ins. : 21.1*C&51%ESCI
EUT : Apple iBeacon
M/N : A1573
Power Rating: DC 3.7V
Test Mode : TX CH39 2480MHz
Memo :

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	55.22	7.40	0.47	46.46	27.36	26.97	40.00	13.03 QP
2	126.03	13.00	0.73	40.09	26.94	26.88	43.50	16.62 QP
3	214.30	10.40	1.00	43.14	26.53	28.01	43.50	15.49 QP
4	326.82	14.60	1.36	41.76	26.54	31.18	46.00	14.82 QP
5	502.39	18.05	1.78	37.54	27.52	29.85	46.00	16.15 QP
6	754.59	20.60	2.18	33.85	27.32	29.31	46.00	16.69 QP

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official
limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
No.1289, Jiang Xing East Road, The Eastern Part of Wu Jiang
Economic Development Zone, JiangSu, China
Tel: (0512) 63403993 Fax: (0512) 63403993

Site NO. : 3m Semi-Anechoic Chamber Data NO. : 13
Dis. / Ant. : 3m 6112D(22253)-1305-3M Ant. pol. : HORIZONTAL
Limit : FCC PART 15 CLASS B Engineer : boqiang_li
Env. / Ins. : 21.1*C&51%ESCI
EUT : Apple iBeacon
M/N : A1573
Power Rating: DC 3.7V
Test Mode : RX
Memo :

	Freq. (MHz)	Ant. (dB)	Cable (dB)	Preamp Factor	Emission Level (dB)	Limits (dBuV/m)	Margin (dB)	Remark
1	122.15	13.00	0.80	41.69	26.96	28.53	43.50	14.97 QP
2	251.16	13.10	1.27	43.71	26.43	31.65	46.00	14.35 QP
3	303.54	14.07	1.32	42.08	26.41	31.06	46.00	14.94 QP
4	431.58	17.13	1.59	37.51	27.22	29.01	46.00	16.99 QP
5	749.74	20.50	2.16	36.60	27.34	31.92	46.00	14.08 QP
6	961.20	22.20	2.41	35.97	26.52	34.06	54.00	19.94 QP

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official
limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
No.1289, Jiang Xing East Road, The Eastern Part of Wu Jiang
Economic Development Zone, JiangSu, China
Tel: (0512) 63403993 Fax: (0512) 63403993

Site NO. : 3m Semi-Anechoic Chamber Data NO. : 14
Dis. / Ant. : 3m 6112D(22253)-1305-3M Ant. pol. : VERTICAL
Limit : FCC PART 15 CLASS B Engineer : boqiang_li
Env. / Ins. : 21.1*C&51%ESCI
EUT : Apple iBeacon
M/N : A1573
Power Rating: DC 3.7V
Test Mode : RX
Memo :

	Freq. (MHz)	Ant. (dB)	Cable (dB)	Preamp Factor	Emission Level (dB)	Limits (dBuV/m)	Margin (dB)	Remark
1	87.23	9.00	0.62	45.22	27.15	27.69	40.00	12.31 QP
2	326.82	14.60	1.36	41.76	26.54	31.18	46.00	14.82 QP
3	431.58	17.13	1.59	39.42	27.22	30.92	46.00	15.08 QP
4	485.90	17.80	1.60	40.61	27.46	32.55	46.00	13.45 QP
5	815.70	21.03	2.26	36.13	27.08	32.34	46.00	13.66 QP
6	898.15	21.80	2.47	33.87	26.67	31.47	46.00	14.53 QP

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official
limit are not reported.

4.8. Restricted Bands Measurement Results (For Above 1GHz)



Audix Technology(Wujiang)Co.,Ltd.
No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
Economic Development Zone,JiangSu,China
Tel: (0512) 63403993 Fax: (0512) 63403993

Site NO. : 3m Semi-Anechoic Chamber Data NO. : 7
Dis. / Ant. : 3m 3115-62960-130507 Ant. pol. : HORIZONTAL
Limit : FCC PART 15 C PK
Env. / Ins. : 21.1*C&51%N9030A Engineer : boqiang_li
EUT : Apple iBeacon
M/N : A1573
Power Rating: DC 3.7V
Test Mode : TX CHO 2402MHz
Memo :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission		Margin (dB)	Remark
					Level (dBuV/m)	Limits (dBuV/m)		
1 4804.00	32.96	9.10	38.20	34.52	45.74	74.00	28.26	Peak
2 7206.00	35.94	11.27	34.41	34.63	46.99	74.00	27.01	Peak
3 8924.00	37.83	12.71	35.35	34.59	51.30	74.00	22.70	Peak
4 9608.00	37.94	13.53	33.85	34.42	50.90	74.00	23.10	Peak
5 10996.00	38.30	14.15	33.79	34.26	51.98	74.00	22.02	Peak
6 12010.00	39.29	14.83	33.66	34.09	53.69	74.00	20.31	Peak

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official
limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
Economic Development Zone,JiangSu,China
Tel: (0512) 63403993 Fax: (0512) 63403993

Site NO. : 3m Semi-Anechoic Chamber Data NO. : 8
Dis. / Ant. : 3m 3115-62960-130507 Ant. pol. : VERTICAL
Limit : FCC PART 15 C PK
Env. / Ins. : 21.1*C&51%N9030A Engineer : boqiang_li
EUT : Apple iBeacon
M/N : A1573
Power Rating: DC 3.7V
Test Mode : TX CHO 2402MHz
Memo :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission		Margin (dB)	Remark
					Level (dBuV/m)	Limits (dBuV/m)		
1 4804.00	32.96	9.10	39.12	34.52	46.66	74.00	27.34	Peak
2 7206.00	35.94	11.27	38.83	34.63	51.41	74.00	22.59	Peak
3 9036.00	37.90	12.75	35.58	34.57	51.66	74.00	22.34	Peak
4 9608.00	37.94	13.53	35.06	34.42	52.11	74.00	21.89	Peak
5 11066.00	38.37	14.33	33.70	34.25	52.15	74.00	21.85	Peak
6 12010.00	39.29	14.83	32.20	34.09	52.23	74.00	21.77	Peak

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official
limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
Economic Development Zone,JiangSu,China
Tel: (0512) 63403993 Fax: (0512) 63403993

Site NO. : 3m Semi-Anechoic Chamber Data NO. : 9
Dis. / Ant. : 3m 3115-62960-130507 Ant. pol. : HORIZONTAL
Limit : FCC PART 15 C PK
Env. / Ins. : 21.1*C&51%/N9030A Engineer : boqiang_li
EUT : Apple iBeacon
M/N : A1573
Power Rating: DC 3.7V
Test Mode : TX CH19 2440MHz
Memo :

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4880.00	33.08	9.20	35.36	34.50	43.14	74.00	30.86	Peak
2	7320.00	36.25	11.36	37.96	34.63	50.94	74.00	23.06	Peak
3	8910.00	37.82	12.50	35.42	34.59	51.15	74.00	22.85	Peak
4	9760.00	38.00	13.87	33.86	34.38	51.35	74.00	22.65	Peak
5	11094.00	38.40	14.44	34.58	34.25	53.17	74.00	20.83	Peak
6	12200.00	39.18	14.79	31.40	33.78	51.59	74.00	22.41	Peak

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official
limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
Economic Development Zone,JiangSu,China
Tel: (0512) 63403993 Fax: (0512) 63403993

Site NO. : 3m Semi-Anechoic Chamber Data NO. : 10
Dis. / Ant. : 3m 3115-62960-130507 Ant. pol. : VERTICAL
Limit : FCC PART 15 C PK
Env. / Ins. : 21.1*C&51%/N9030A Engineer : boqiang_li
EUT : Apple iBeacon
M/N : A1573
Power Rating: DC 3.7V
Test Mode : TX CH19 2440MHz
Memo :

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4880.00	33.08	9.20	37.03	34.50	44.81	74.00	29.19	Peak
2	7325.97	36.25	11.36	23.71	34.63	36.69	54.00	17.31	Average
3	7328.00	36.25	11.36	46.10	34.63	59.08	74.00	14.92	Peak
4	8966.00	37.87	12.67	34.84	34.58	50.80	74.00	23.20	Peak
5	9760.00	38.00	13.87	33.68	34.38	51.17	74.00	22.83	Peak
6	11080.00	38.38	14.33	34.73	34.25	53.19	74.00	20.81	Peak
7	12200.00	39.18	14.79	32.23	33.78	52.42	74.00	21.58	Peak

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official
limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
Economic Development Zone,JiangSu,China
Tel: (0512) 63403993 Fax: (0512) 63403993

Site NO. : 3m Semi-Anechoic Chamber Data NO. : 11
Dis. / Ant. : 3m 3115-62960-130507 Ant. pol. : HORIZONTAL
Limit : FCC PART 15 C PK
Env. / Ins. : 21.1*C&51%/N9030A Engineer : boqiang_li
EUT : Apple iBeacon
M/N : A1573
Power Rating: DC 3.7V
Test Mode : TX CH39 2480MHz
Memo :

	Freq. (MHz)	Ant. (dB)	Cable (dB)	Loss (dBuV)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4960.00	33.24	9.21	36.11	34.48	44.08	74.00	29.92	Peak	
2	7440.00	36.57	11.38	34.62	34.63	47.94	74.00	26.06	Peak	
3	8756.00	37.70	12.64	35.40	34.60	51.14	74.00	22.86	Peak	
4	9920.00	38.07	13.48	34.33	34.34	51.54	74.00	22.46	Peak	
5	10996.00	38.30	14.15	34.24	34.26	52.43	74.00	21.57	Peak	
6	12400.00	39.05	14.83	32.31	33.43	52.76	74.00	21.24	Peak	
7	12400.48	39.05	14.83	23.65	33.43	44.10	54.00	9.90	Average	

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
Economic Development Zone,JiangSu,China
Tel: (0512) 63403993 Fax: (0512) 63403993

Site NO. : 3m Semi-Anechoic Chamber Data NO. : 12
Dis. / Ant. : 3m 3115-62960-130507 Ant. pol. : VERTICAL
Limit : FCC PART 15 C PK
Env. / Ins. : 21.1*C&51%/N9030A Engineer : boqiang_li
EUT : Apple iBeacon
M/N : A1573
Power Rating: DC 3.7V
Test Mode : TX CH39 2480MHz
Memo :

	Freq. (MHz)	Ant. (dB)	Cable (dB)	Loss (dBuV)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4960.00	33.24	9.21	36.76	34.48	44.73	74.00	29.27	Peak	
2	7439.84	36.57	11.38	31.12	34.63	44.44	54.00	9.56	Average	
3	7440.00	36.57	11.38	43.58	34.63	56.90	74.00	17.10	Peak	
4	9022.00	37.90	12.75	35.37	34.57	51.45	74.00	22.55	Peak	
5	9920.00	38.07	13.48	34.52	34.34	51.73	74.00	22.27	Peak	
6	11164.00	38.47	14.37	34.64	34.24	53.24	74.00	20.76	Peak	
7	12400.00	39.05	14.83	33.24	33.43	53.69	74.00	20.31	Peak	
8	12400.69	39.05	14.83	23.62	33.43	44.07	54.00	9.93	Average	

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
Economic Development Zone,JiangSu,China
Tel: (0512) 63403993 Fax: (0512) 63403993

Site NO. : 3m Semi-Anechoic Chamber Data NO. : 15
Dis. / Ant. : 3m 3115-62960-130507 Ant. pol. : HORIZONTAL
Limit : FCC PART 15 C PK
Env. / Ins. : 21.1*C&51%/N9030A Engineer : boqiang_li
EUT : Apple iBeacon
M/N : A1573
Power Rating: DC 3.7V
Test Mode : RX
Memo :

	Freq. (MHz)	Ant. (dB)	Cable (dB)	Preamp Factor	Emission Level (dB)	Limits (dBuV/m)	Margin (dB)	Remark
1	4374.00	32.43	8.65	39.19	34.62	45.65	74.00	28.35 Peak
2	7244.00	36.03	11.45	36.29	34.63	49.14	74.00	24.86 Peak
3	8924.00	37.83	12.71	35.35	34.59	51.30	74.00	22.70 Peak
4	9862.00	38.04	14.03	35.30	34.35	53.02	74.00	20.98 Peak
5	10674.00	38.17	13.74	34.73	34.28	52.36	74.00	21.64 Peak
6	12186.00	39.19	14.79	34.17	33.78	54.37	74.00	19.63 Peak

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official
limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
Economic Development Zone,JiangSu,China
Tel: (0512) 63403993 Fax: (0512) 63403993

Site NO. : 3m Semi-Anechoic Chamber Data NO. : 16
Dis. / Ant. : 3m 3115-62960-130507 Ant. pol. : VERTICAL
Limit : FCC PART 15 C PK
Env. / Ins. : 21.1*C&51%/N9030A Engineer : boqiang_li
EUT : Apple iBeacon
M/N : A1573
Power Rating: DC 3.7V
Test Mode : RX
Memo :

	Freq. (MHz)	Ant. (dB)	Cable (dB)	Preamp Factor	Emission Level (dB)	Limits (dBuV/m)	Margin (dB)	Remark
1	5368.00	33.89	9.63	39.74	34.47	48.79	74.00	25.21 Peak
2	7440.00	36.57	11.38	37.13	34.63	50.45	74.00	23.55 Peak
3	8546.00	37.54	12.30	36.89	34.61	52.12	74.00	21.88 Peak
4	9680.00	37.98	13.70	35.02	34.41	52.29	74.00	21.71 Peak
5	10604.00	38.14	13.76	34.26	34.28	51.88	74.00	22.12 Peak
6	12354.00	39.08	14.82	33.27	33.52	53.65	74.00	20.35 Peak


Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official
limit are not reported.

4.9. Spurious Emission Measurement Results in Band Edge Emission (FCC Part 15, 15.205)



Audix Technology (Wujiang) Co., Ltd.
No.1289, Jiang Xing East Road, The Eastern Part of Wu Jiang
Economic Development Zone, JiangSu, China
Tel: (0512) 63403993 Fax: (0512) 63403993

Data: 17 File: G:\Test Data\2014\Reports\04\G1404010.EM6 (32)

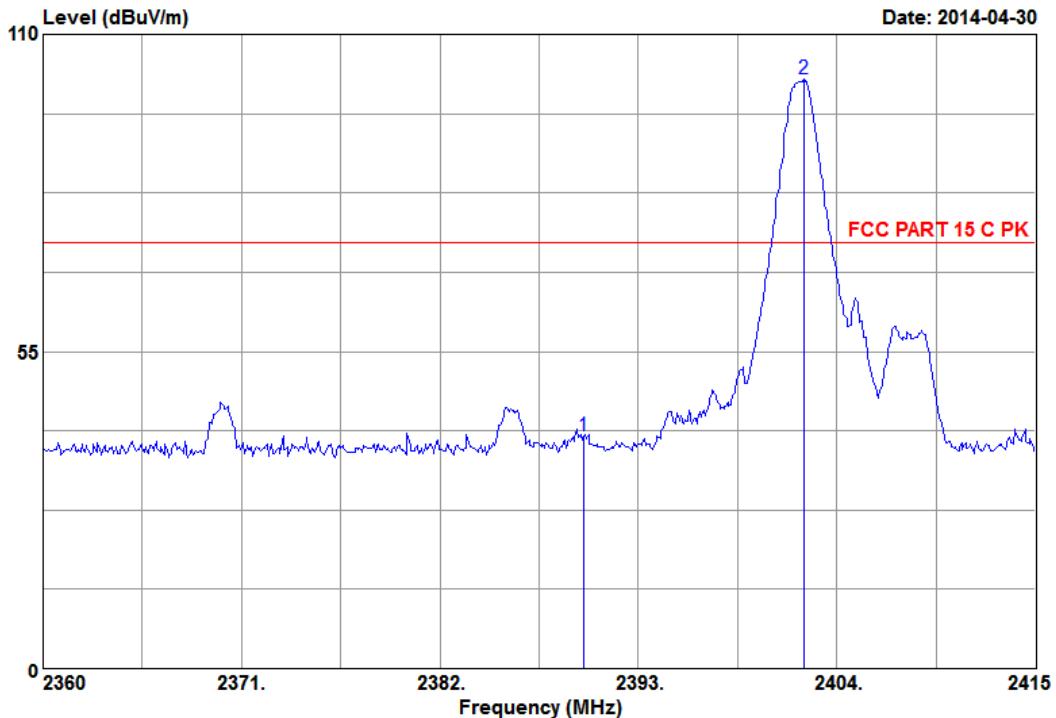

Site NO. : 3m Semi-Anechoic Chamber
Dis. / Ant. : 3m 3115-62960-130507
Limit : FCC PART 15 C PK
Env. / Ins. : 20.7*C&57%*N9030A
EUT : Apple iBeacon
M/N : A1573
Power Rating: DC 3.7V
Test Mode : TX CHO 2402MHz
Memo :

Data NO. : 17
Ant. pol. : HORIZONTAL
Engineer : boqiang_li


Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2390.00	28.07	6.40	40.87	35.07	40.27	74.00	33.73	Peak
2 2402.19	28.07	6.40	102.80	35.07	102.20	74.00	-28.20	Peak

Remarks: 1. Emission Level = Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology (Wujiang) Co., Ltd.
No.1289, Jiang Xing East Road, The Eastern Part of Wu Jiang
Economic Development Zone, JiangSu, China
Tel: (0512) 63403993 Fax: (0512) 63403993

Data: 18 File: G:\Test Data\2014\Reports\04\G1404010.EM6 (32)

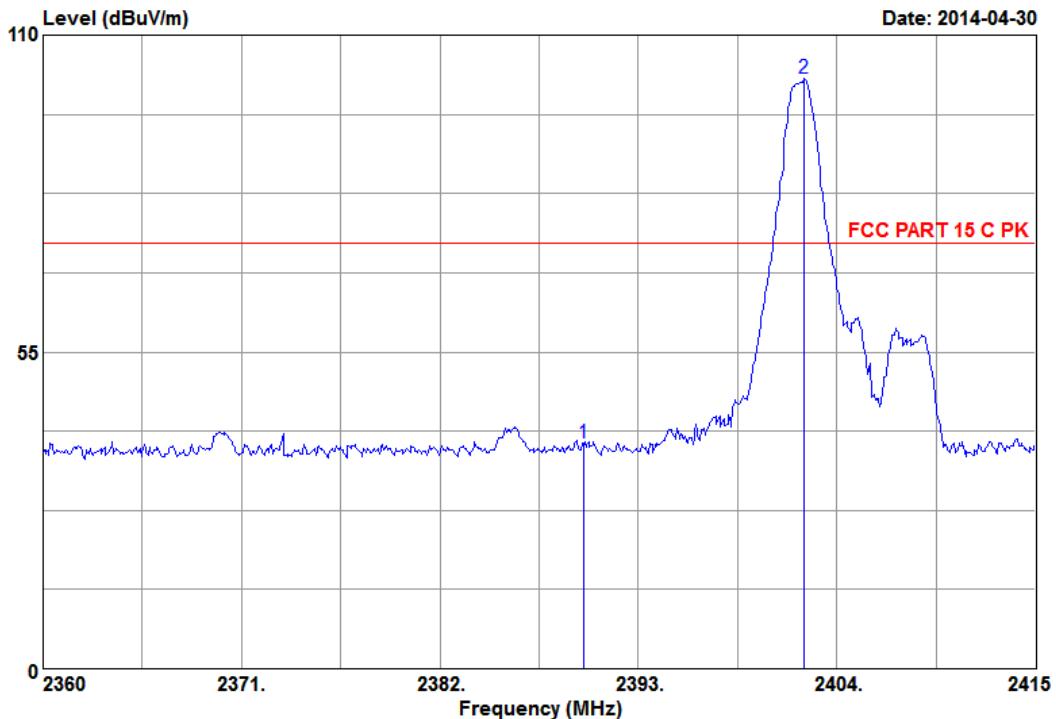

Site NO. : 3m Semi-Anechoic Chamber
Dis. / Ant. : 3m 3115-62960-130507
Limit : FCC PART 15 C PK
Env. / Ins. : 20.7*C&57%/N9030A
EUT : Apple iBeacon
M/N : A1573
Power Rating: DC 3.7V
Test Mode : TX CHO 2402MHz
Memo :

Data NO. : 18
Ant. pol. : VERTICAL
Engineer : boqiang_li


Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Emission			Margin (dB)	Remark
				Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)		
1 2390.00	28.07	6.40	39.87	35.07	39.27	74.00	34.73	Peak
2 2402.19	28.07	6.40	103.13	35.07	102.53	74.00	-28.53	Peak

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology (Wujiang) Co., Ltd.
No.1289, Jiang Xing East Road, The Eastern Part of Wu Jiang
Economic Development Zone, JiangSu, China
Tel: (0512) 63403993 Fax: (0512) 63403993

Data: 19 File: G:\Test Data\2014\Reports\04\G1404010.EM6 (32)

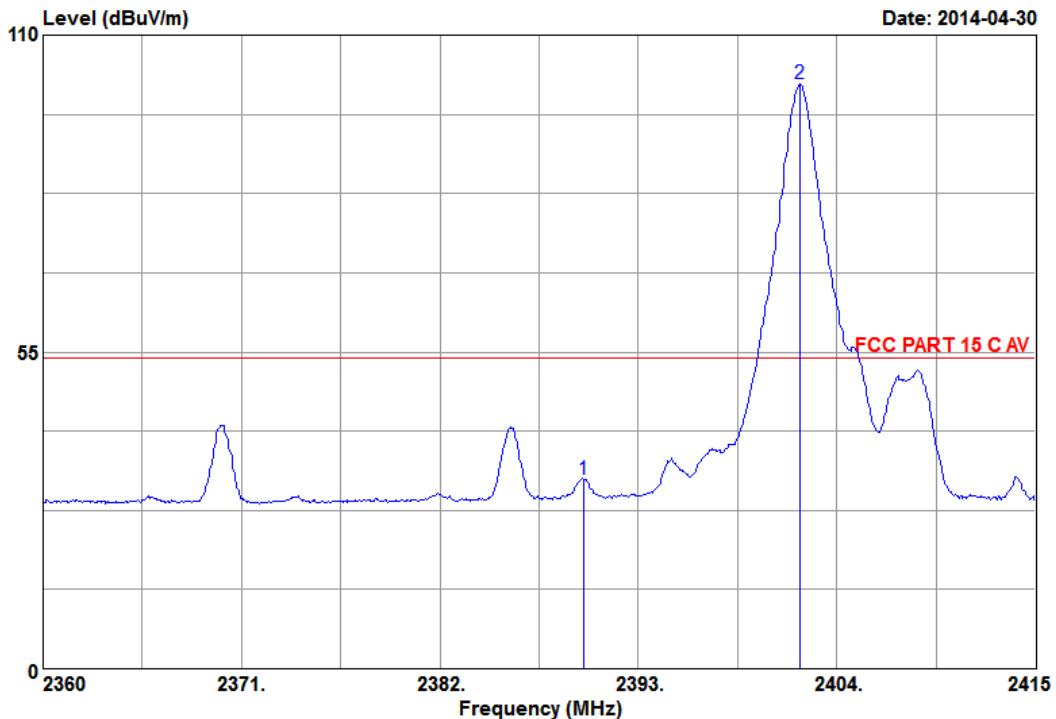

Site NO. : 3m Semi-Anechoic Chamber
Dis. / Ant. : 3m 3115-62960-130507
Limit : FCC PART 15 C AV
Env. / Ins. : 20.7*C&57%/N9030A
EUT : Apple iBeacon
M/N : A1573
Power Rating: DC 3.7V
Test Mode : TX CHO 2402MHz
Memo :

Data NO. : 19
Ant. pol. : HORIZONTAL
Engineer : boqiang_li


Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Emission			Margin (dB)	Remark
				Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)		
1 2390.00	28.07	6.40	33.55	35.07	32.95	54.00	21.05	Average
2 2401.97	28.07	6.40	102.11	35.07	101.51	54.00	-47.51	Average

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology (Wujiang) Co., Ltd.
No.1289, Jiang Xing East Road, The Eastern Part of Wu Jiang
Economic Development Zone, JiangSu, China
Tel: (0512) 63403993 Fax: (0512) 63403993

Data: 20 File: G:\Test Data\2014\Reports\04\G1404010.EM6 (32)

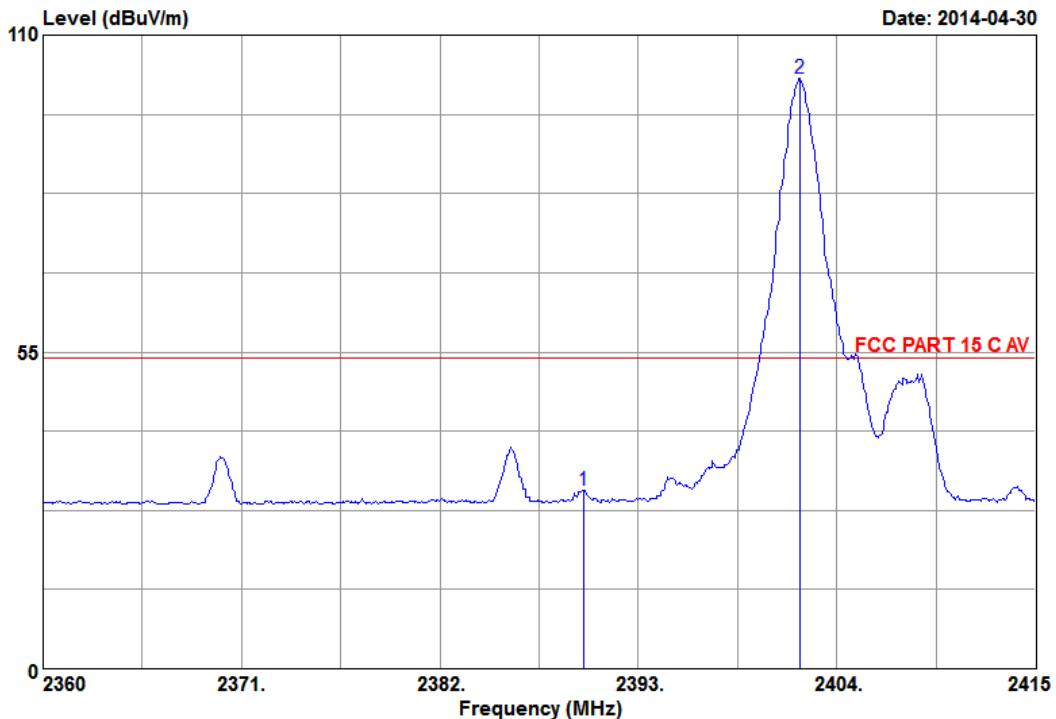

Site NO. : 3m Semi-Anechoic Chamber
Dis. / Ant. : 3m 3115-62960-130507
Limit : FCC PART 15 C AV
Env. / Ins. : 20.7*C&57%/N9030A
EUT : Apple iBeacon
M/N : A1573
Power Rating: DC 3.7V
Test Mode : TX CHO 2402MHz
Memo :

Data NO. : 20
Ant. pol. : VERTICAL
Engineer : boqiang_li


Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Emission			Margin (dB)	Remark
				Reading (dB _{UV})	Level (dB _{UV} /m)	Limits (dB _{UV} /m)		
1 2390.00	28.07	6.40	31.58	35.07	30.98	54.00	23.02	Average
2 2401.97	28.07	6.40	103.14	35.07	102.54	54.00	-48.54	Average

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology (Wujiang) Co., Ltd.
No.1289, Jiang Xing East Road, The Eastern Part of Wu Jiang
Economic Development Zone, JiangSu, China
Tel: (0512) 63403993 Fax: (0512) 63403993

Data: 21 File: G:\Test Data\2014\Reports\04\G1404010.EM6 (32)

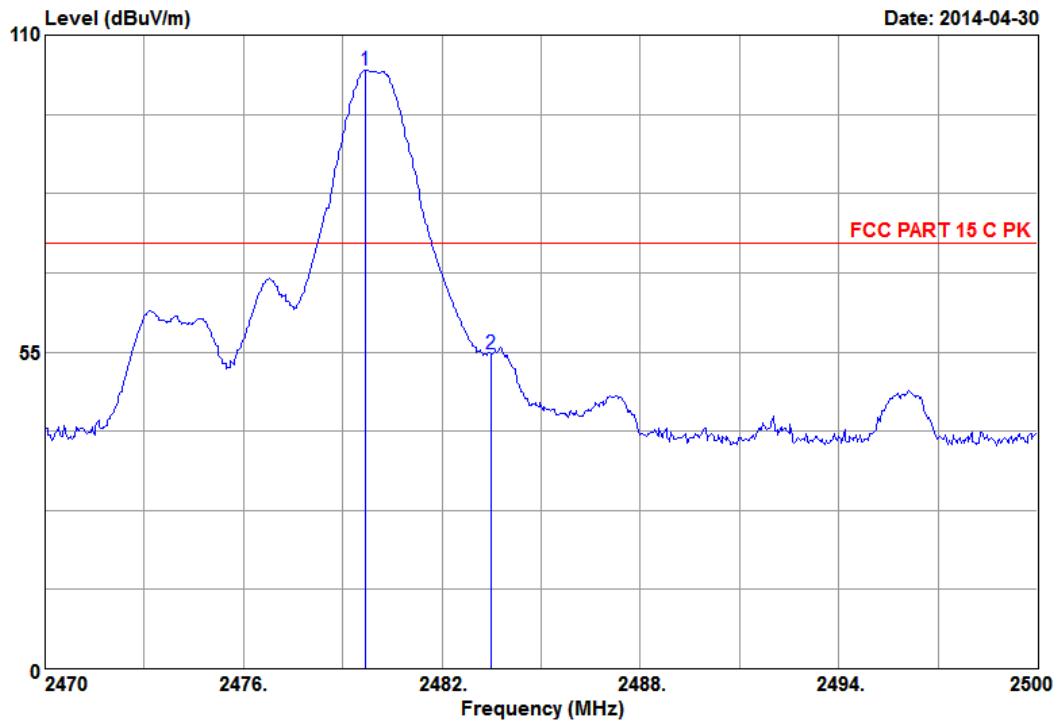

Site NO. : 3m Semi-Anechoic Chamber
Dis. / Ant. : 3m 3115-62960-130507
Limit : FCC PART 15 C PK
Env. / Ins. : 20.7*C&57%/N9030A
EUT : Apple iBeacon
M/N : A1573
Power Rating: DC 3.7V
Test Mode : TX CH39 2480MHz
Memo :

Data NO. : 21
Ant. pol. : HORIZONTAL
Engineer : boqiang_li


Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Emission			Margin (dB)	Remark
				Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)		
1 2479.69	28.26	6.44	104.34	35.06	103.98	74.00	-29.98	Peak
2 2483.50	28.26	6.44	54.99	35.06	54.63	74.00	19.37	Peak

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology (Wujiang) Co., Ltd.
No.1289, Jiang Xing East Road, The Eastern Part of Wu Jiang
Economic Development Zone, JiangSu, China
Tel: (0512) 63403993 Fax: (0512) 63403993

Data: 22 File: G:\Test Data\2014\Reports\04\G1404010.EM6 (32)

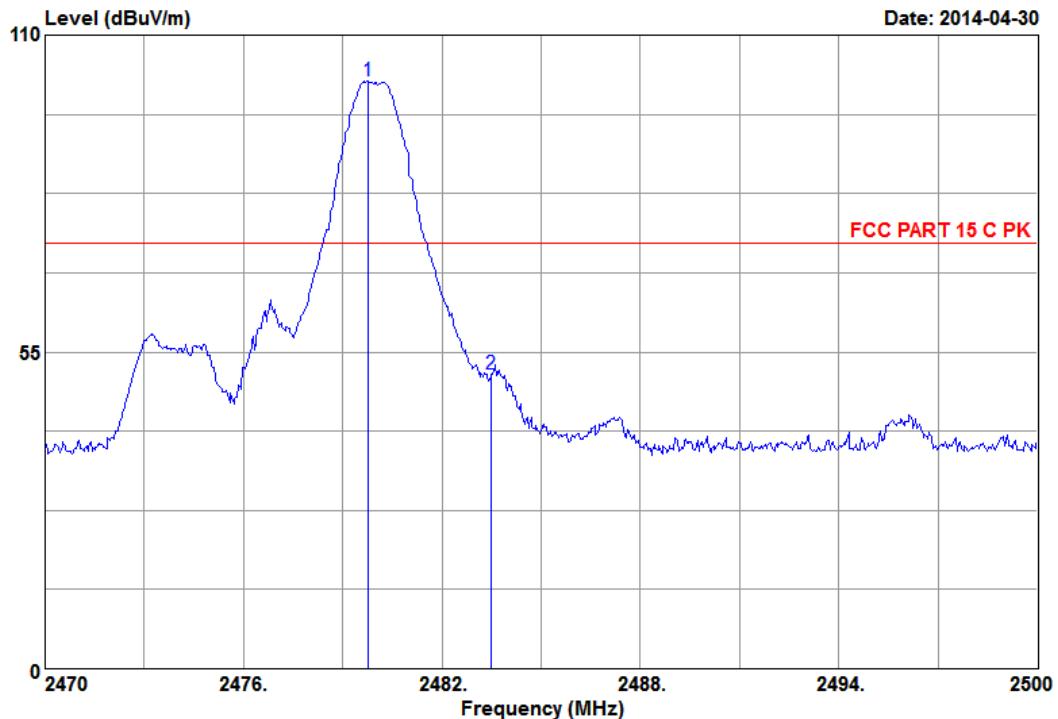

Site NO. : 3m Semi-Anechoic Chamber
Dis. / Ant. : 3m 3115-62960-130507
Limit : FCC PART 15 C PK
Env. / Ins. : 20.7*C&57%/N9030A
EUT : Apple iBeacon
M/N : A1573
Power Rating: DC 3.7V
Test Mode : TX CH39 2480MHz
Memo :

Data NO. : 22
Ant. pol. : VERTICAL
Engineer : boqiang_li


Freq. (MHz)	Ant. (dB)	Cable (dB)	Preamp (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2479.78	28.26	6.44	102.45	35.06	102.09	74.00	-28.09 Peak
2 2483.50	28.26	6.44	51.47	35.06	51.11	74.00	22.89 Peak

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology (Wujiang) Co., Ltd.
No.1289, Jiang Xing East Road, The Eastern Part of Wu Jiang
Economic Development Zone, JiangSu, China
Tel: (0512) 63403993 Fax: (0512) 63403993

Data: 23 File: G:\Test Data\2014\Reports\04\G1404010.EM6 (32)

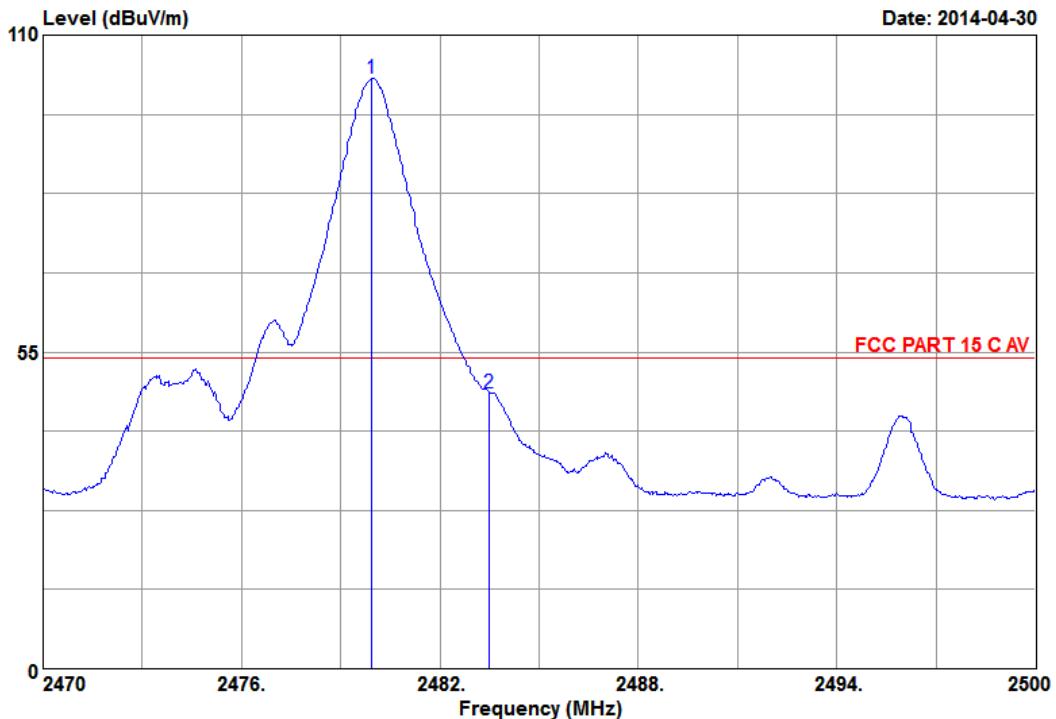

Site NO. : 3m Semi-Anechoic Chamber
Dis. / Ant. : 3m 3115-62960-130507
Limit : FCC PART 15 C AV
Env. / Ins. : 20.7*C&57%/N9030A
EUT : Apple iBeacon
M/N : A1573
Power Rating: DC 3.7V
Test Mode : TX CH39 2480MHz
Memo :

Data NO. : 23
Ant. pol. : HORIZONTAL
Engineer : boqiang_li


Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2479.93	28.26	6.44	102.94	35.06	102.58	54.00	-48.58 Average
2 2483.50	28.26	6.44	48.32	35.06	47.96	54.00	6.04 Average

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology (Wujiang) Co., Ltd.
No.1289, Jiang Xing East Road, The Eastern Part of Wu Jiang
Economic Development Zone, JiangSu, China
Tel: (0512) 63403993 Fax: (0512) 63403993

Data: 24 File: G:\Test Data\2014\Reports\04\G1404010.EM6 (32)

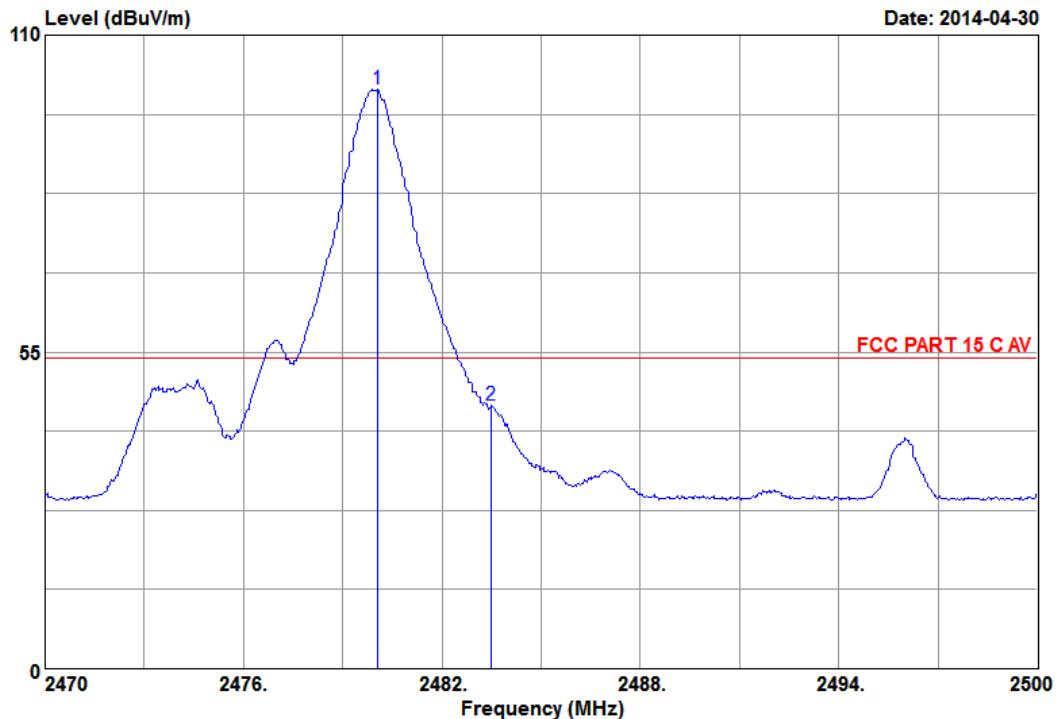

Site NO. : 3m Semi-Anechoic Chamber
Dis. / Ant. : 3m 3115-62960-130507
Limit : FCC PART 15 C AV
Env. / Ins. : 20.7*C&57%/N9030A
EUT : Apple iBeacon
M/N : A1573
Power Rating: DC 3.7V
Test Mode : TX CH39 2480MHz
Memo :

Data NO. : 24
Ant. pol. : VERTICAL
Engineer : boqiang_li

Freq. (MHz)	Ant. (dB)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2480.05	28.26	6.44	100.94	35.06	100.58	54.00	-46.58 Average
2 2483.50	28.26	6.44	46.12	35.06	45.76	54.00	8.24 Average

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official limit are not reported.

5. 6 dB BANDWIDTH MEASUREMENT

5.1. Test Equipment

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	PXA Signal Analyzer	Agilent	N9030A	MY53120367	2013-06-24	2014-06-23

5.2. Block Diagram of Test Setup



— : SIGNAL LINE

5.3. Specification Limits (§15.247(a)(2))

Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

5.4. Test Procedure

The transmitter output was connected to the test receiver / spectrum analyzer. The bandwidth of the fundamental frequency was measured by spectrum analyzer. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB. The measurement guideline was according to KDB558074 v03r01:2013.

5.5. Test Results

PASSED. All the test results are attached in next pages.

Channel	Test Frequency (MHz)	6dB Bandwidth (kHz)
0	2402	687.8
19	2440	684.5
39	2480	686.9

CH 0



CH 19



CH 39




6. MAXIMUM PEAK OUTPUT POWER MEASUREMENT

6.1. Test Equipment

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Power Meter	Agilent	N1911A	MY45100361	2014-01-05	2015-01-04
2.	Power Sensor	Agilent	N1921A	MY45240521	2014-01-05	2015-01-04

6.2. Block Diagram of Test Setup

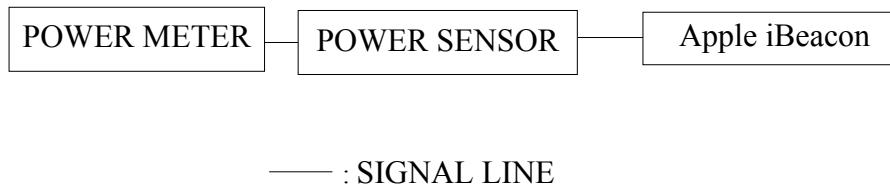

6.3. Specification Limits (§15.247(b)(3))

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

6.4. Test Procedure

This is an RF conducted test. Use a direct connection between the antenna port of the transmitter and the power meter, through suitable attenuation. The transmitter output was connected to the power meter that was designed to detect peak value automatically.

Note: The bandwidth of the power meter is 20MHz.

6.5. Test Results

PASSED. All the test results are attached in next pages.

Channel	Frequency	Power(dBm)	Limit(dBm)
0	2402	4.06	30
19	2440	4.58	30
39	2480	4.98	30

7. BAND EDGES MEASUREMENT

7.1. Test Equipment

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	PXA Signal Analyzer	Agilent	N9030A	MY53120367	2013-06-24	2014-06-23

7.2. Block Diagram of Test Setup

The same as section 5.2.

7.3. Specification Limits (§15.247(d))

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).


7.4. Test Procedure

The transmitter output was connected to the test receiver / spectrum analyzer. Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz with suitable frequency span including 100kHz bandwidth from band edge.


7.5. Test Results

PASSED. The testing data was attached in the next pages.

CH0

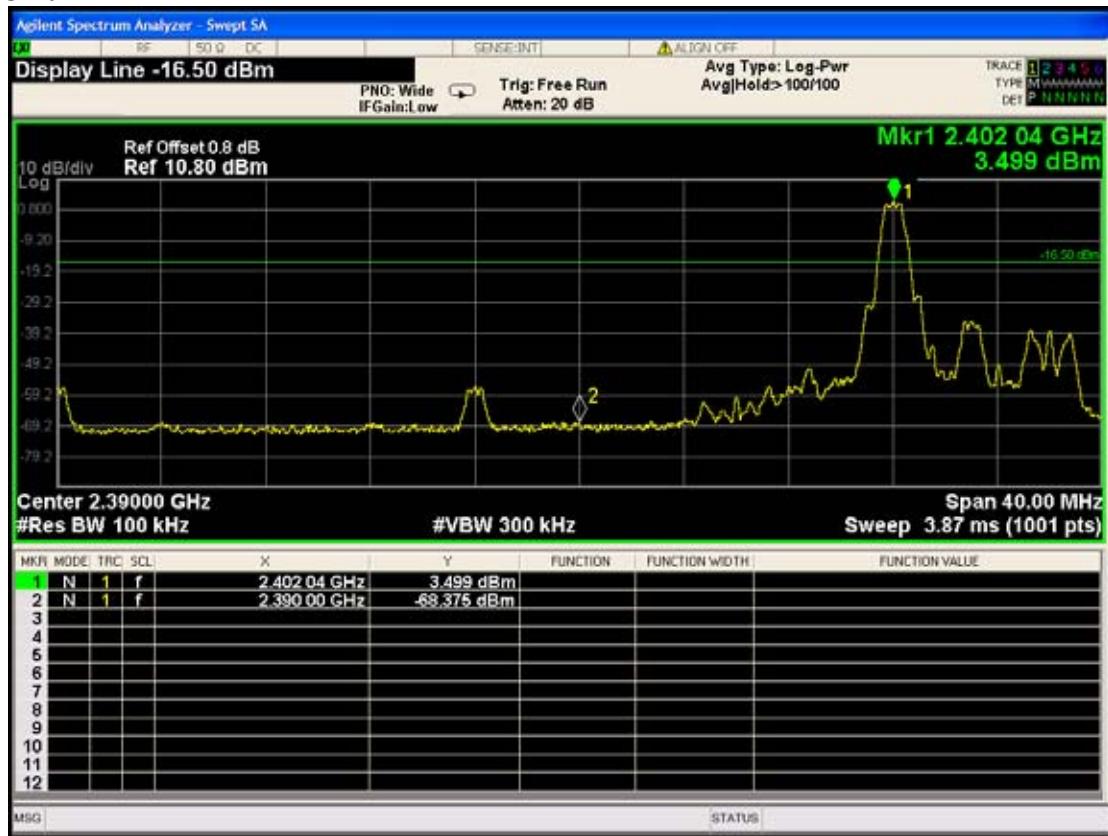

CH 39

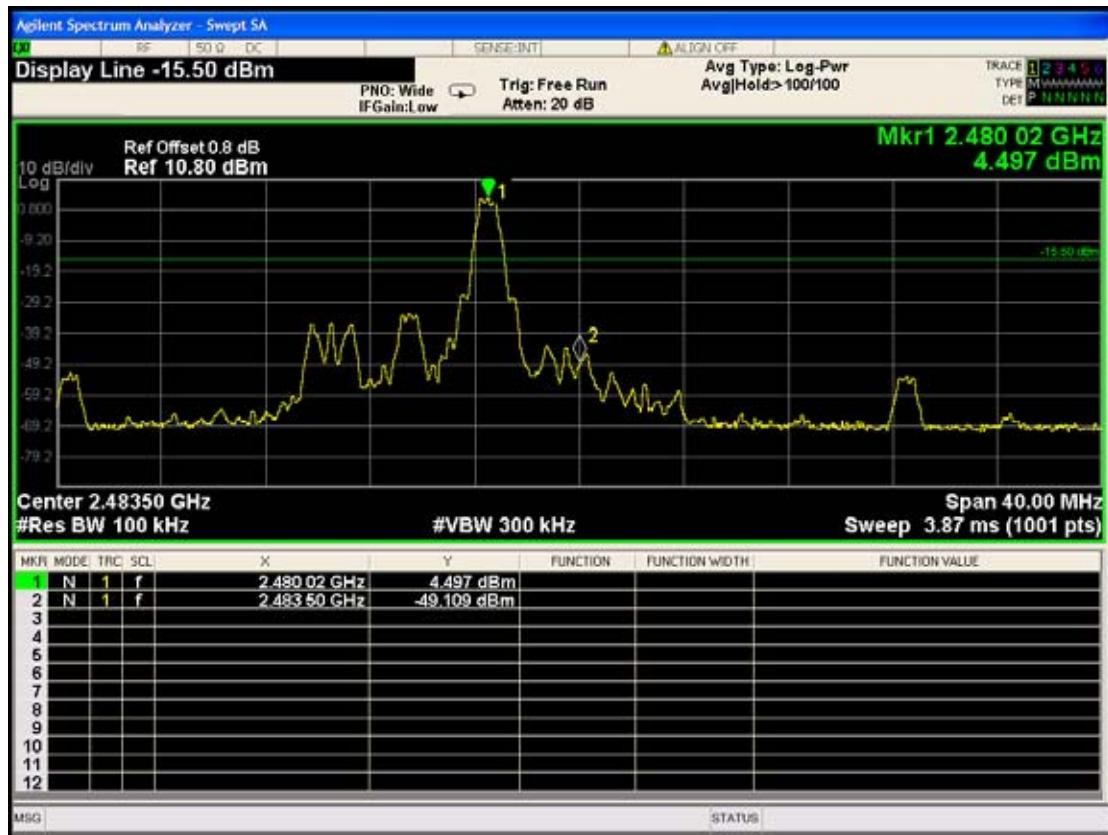

8. POWER SPECTRAL DENSITY MEASUREMENT

8.1. Test Equipment

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	PXA Signal Analyzer	Agilent	N9030A	MY53120367	2013-06-24	2014-06-23

8.2. Block Diagram of Test Setup

The same as section 5.2.

8.3. Specification Limits (§15.247(e))

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.4. Test Procedure

1. Set the RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
2. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
3. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(3 \text{ kHz}/100\text{kHz})$


Follow KDB558074 v03r01:2013 DTS Meas Guidance v01 of measurement procedure PKPSD.

8.5. Test Results

PASSED. All the test results are attached in next page.

Channel	Frequency(GHz)	Value(dBm/100kHz)	Value(dBm/3kHz)
0	2.4020082	3.356	-11.844
19	2.4400062	4.026	-11.174
39	2.4800062	4.376	-10.824


CH 0

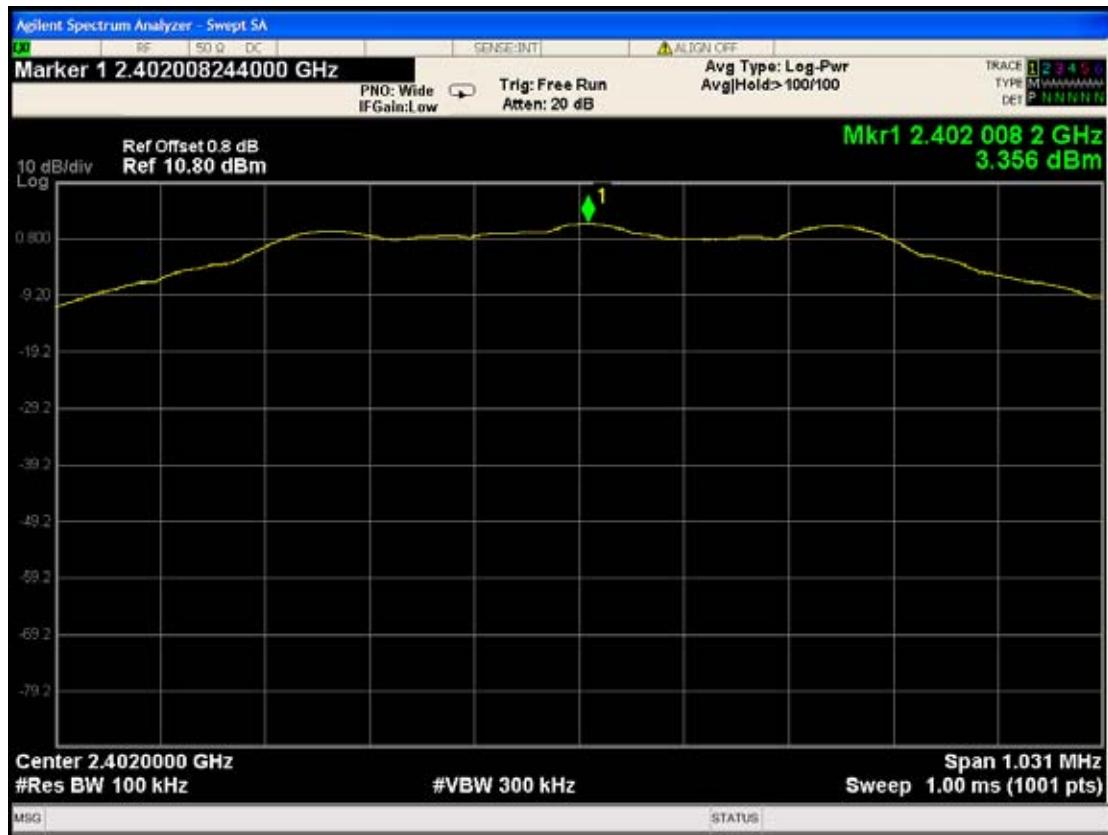

CH 19



CH 39

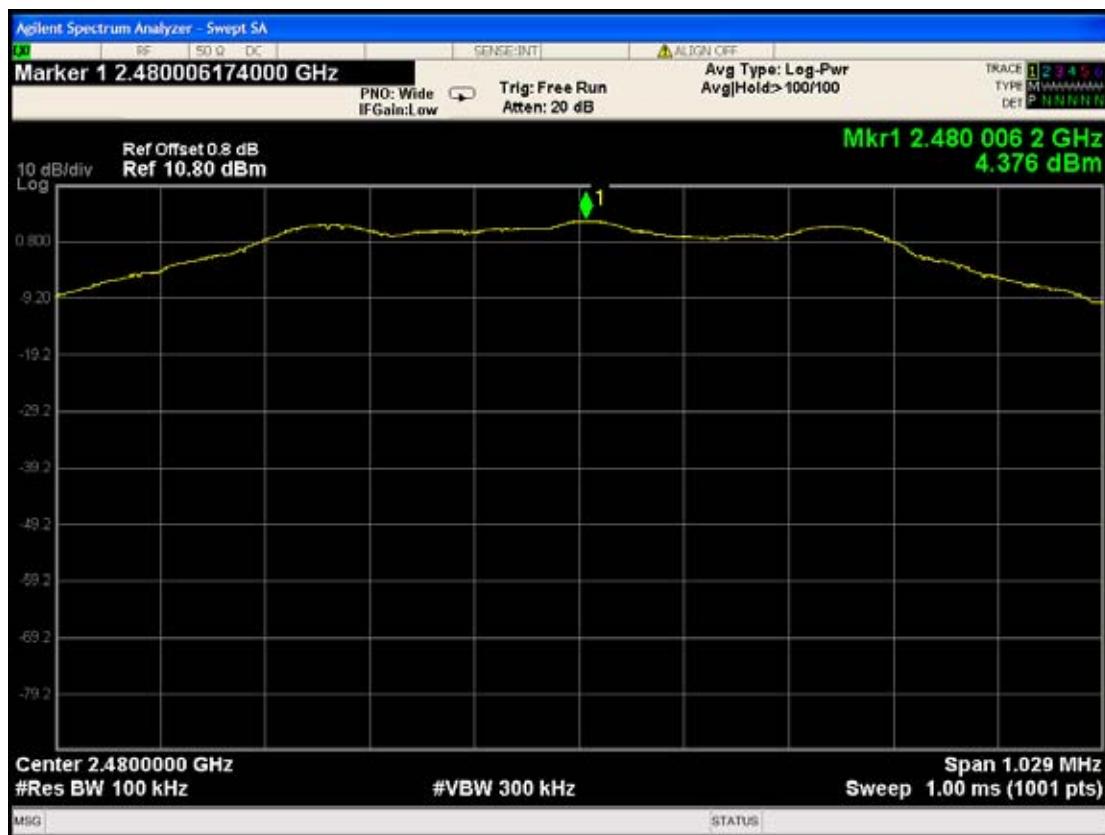

9. EMISSION LIMITATIONS MEASUREMENT

9.1. Test Equipment

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	PXA Signal Analyzer	Agilent	N9030A	MY53120367	2013-06-24	2014-06-23

9.2. Block Diagram of Test Setup

The same as section 5.2.

9.3. Specification Limits (§15.247(d))

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

9.4. Test Procedure



The transmitter output was connected to the spectrum analyzer. Set RBW = 100kHz, VBW \geq 300 kHz, scan up through 10th harmonic. All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. The measurement guideline was according to KDB558074 v03r01:2013.



9.5. Test Results



PASSED. All the test results are attached in next pages.

Channel	Frequency(MHz)	Amplitude(dBm)
0	871.96	-69.910
	2404	3.407
	1848	-65.451
	4828	-67.836
	6385	-66.158
	13615	-66.416
	18895	-64.848
	24850	-63.583
19	819.58	-72.937
	2440	3.719
	1848	-64.916
	4840	-67.557
	7320	-61.251
	14580	-66.087
	19005	-64.740
	23895	-63.565
39	775.93	-73.447
	2480	4.384
	1848	-64.288
	4872	-68.362
	7440	-64.689
	14170	-65.360
	18650	-64.855
	23675	-64.259



CH 0

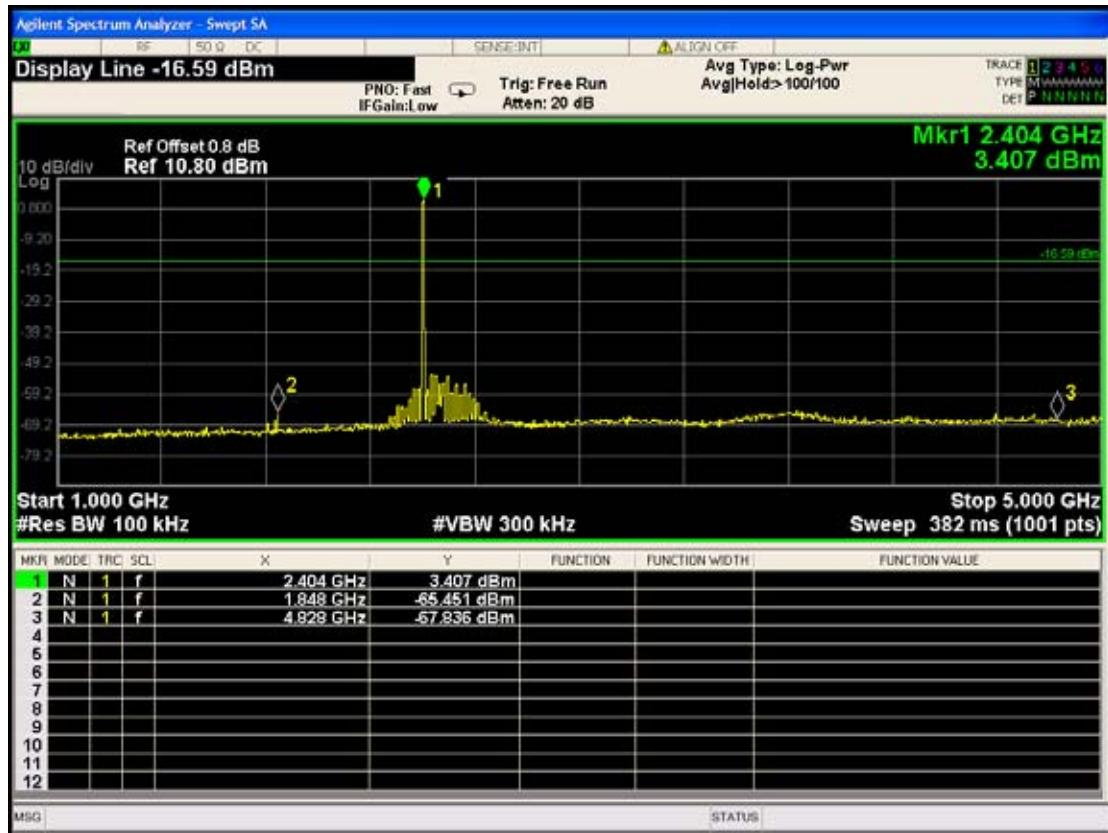
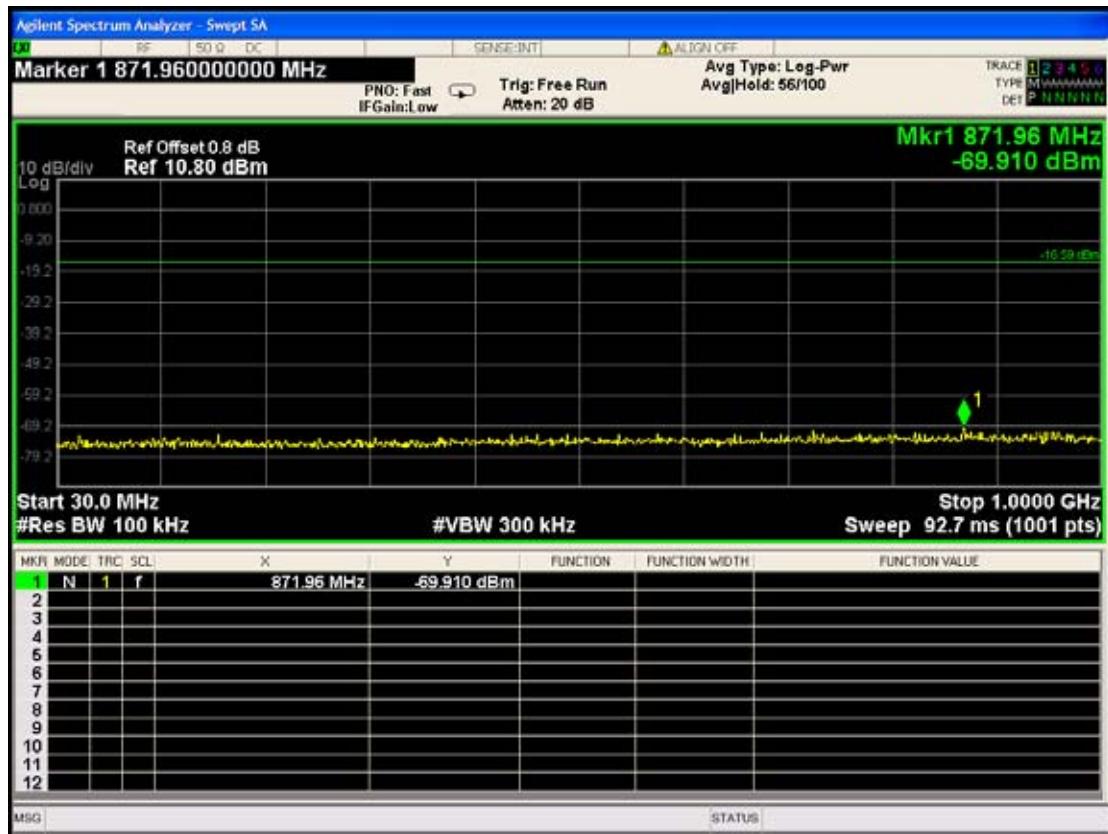


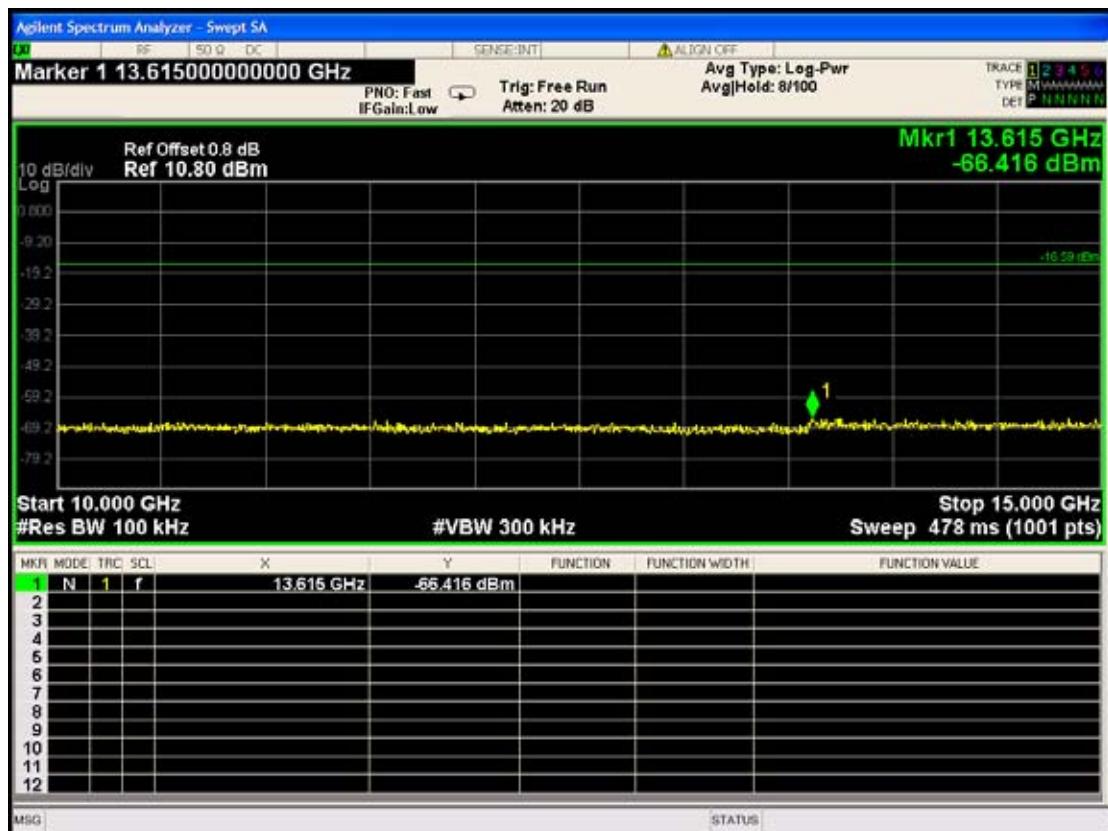
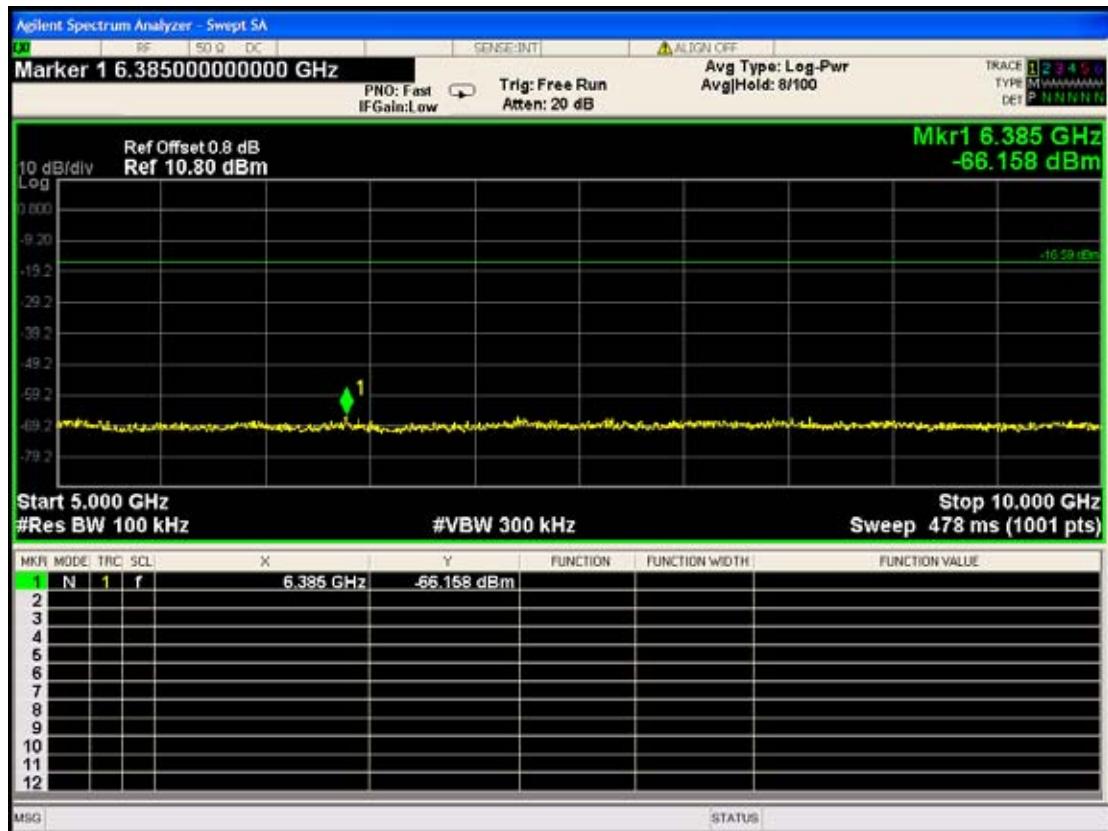


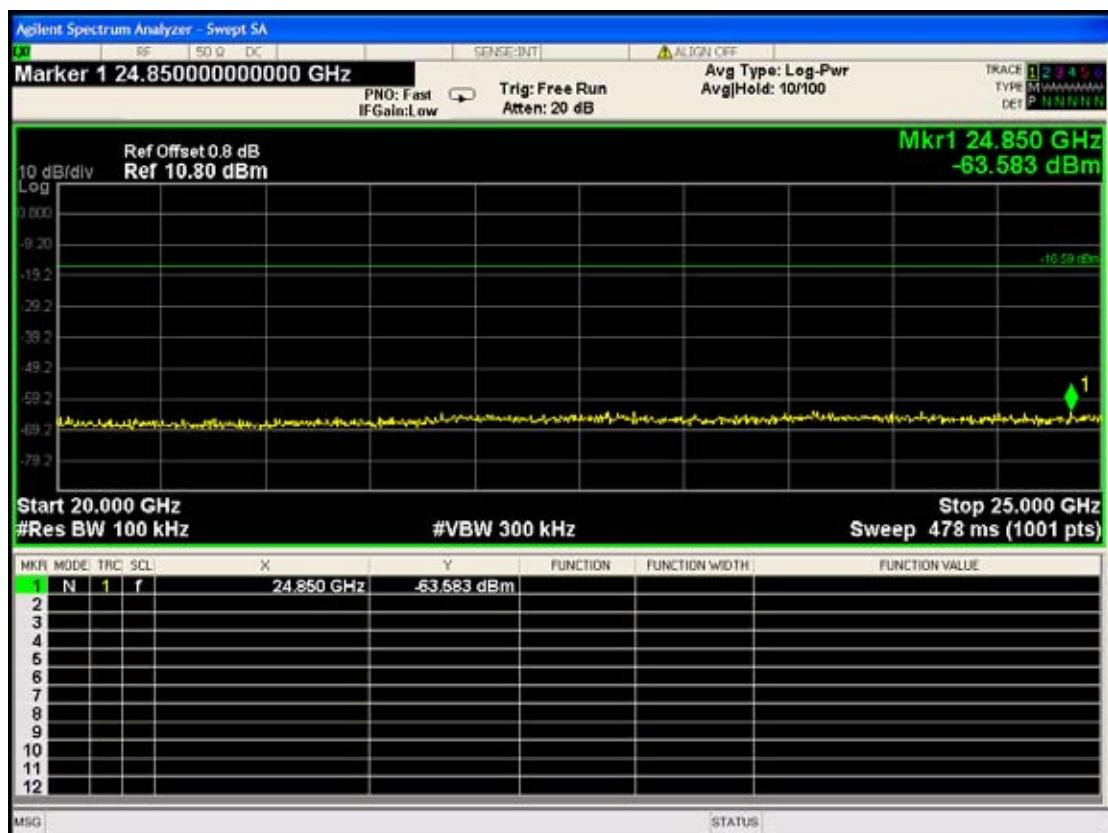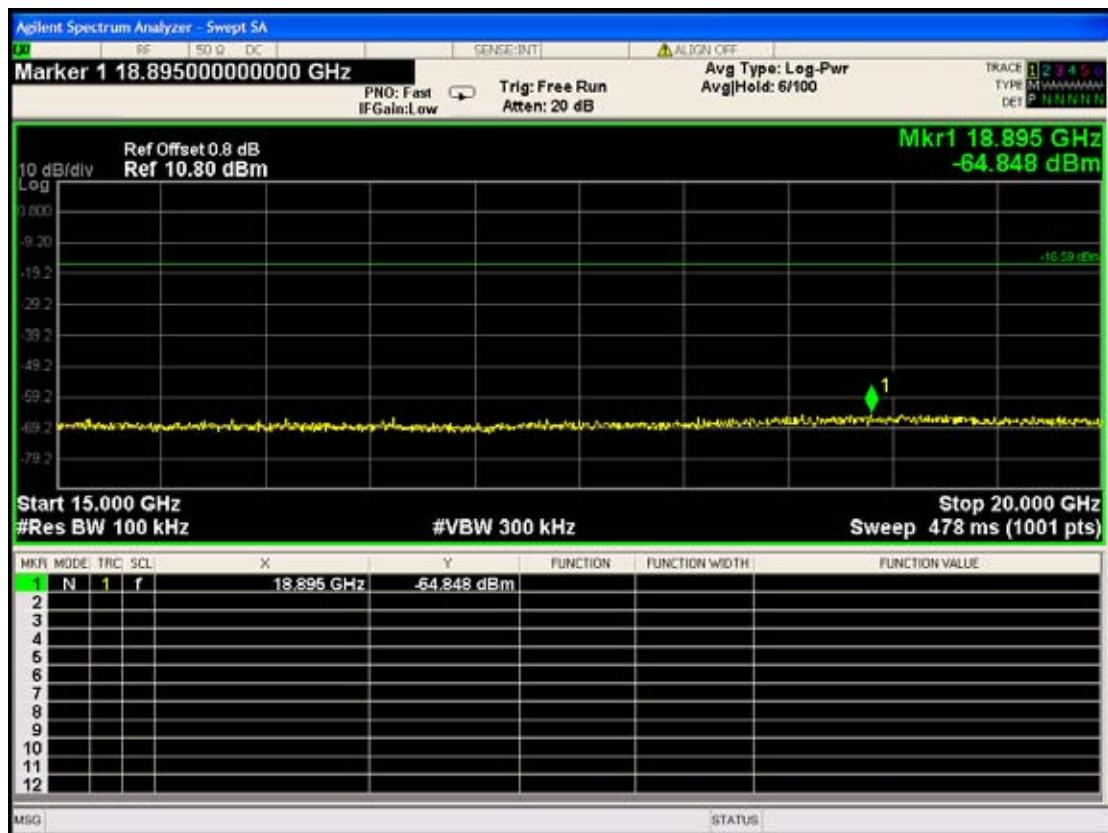



CH 19

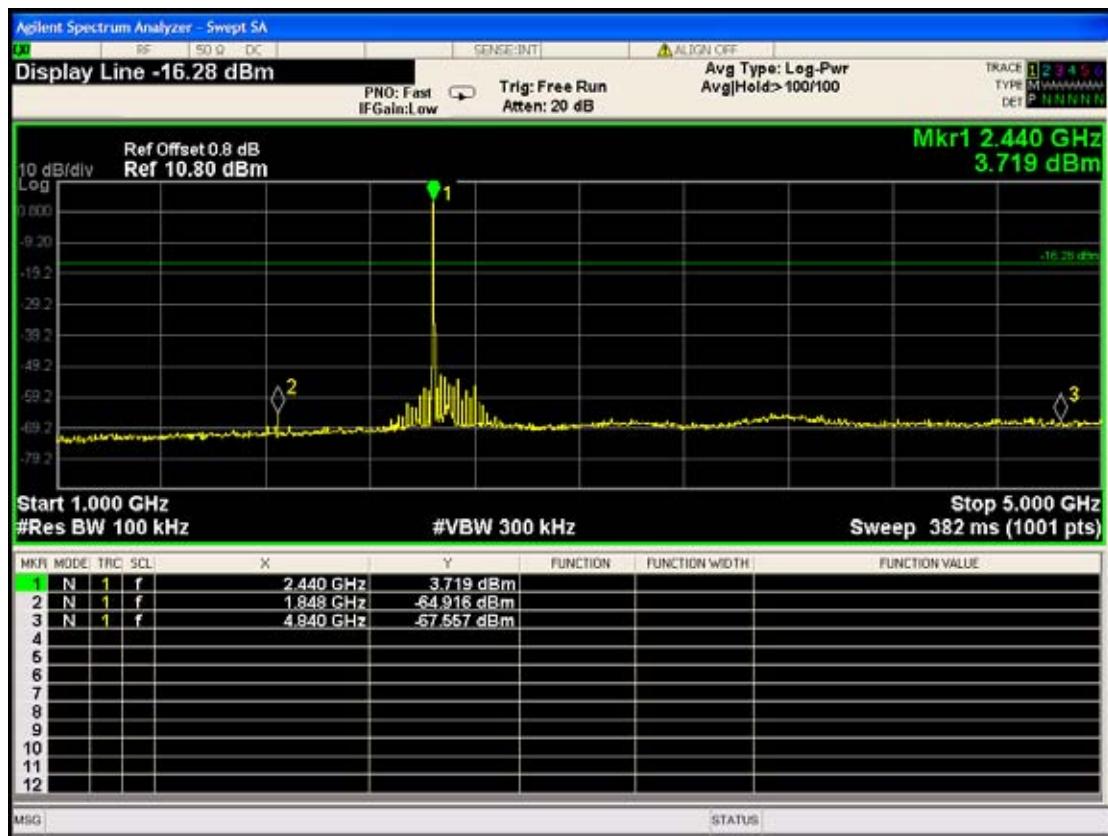
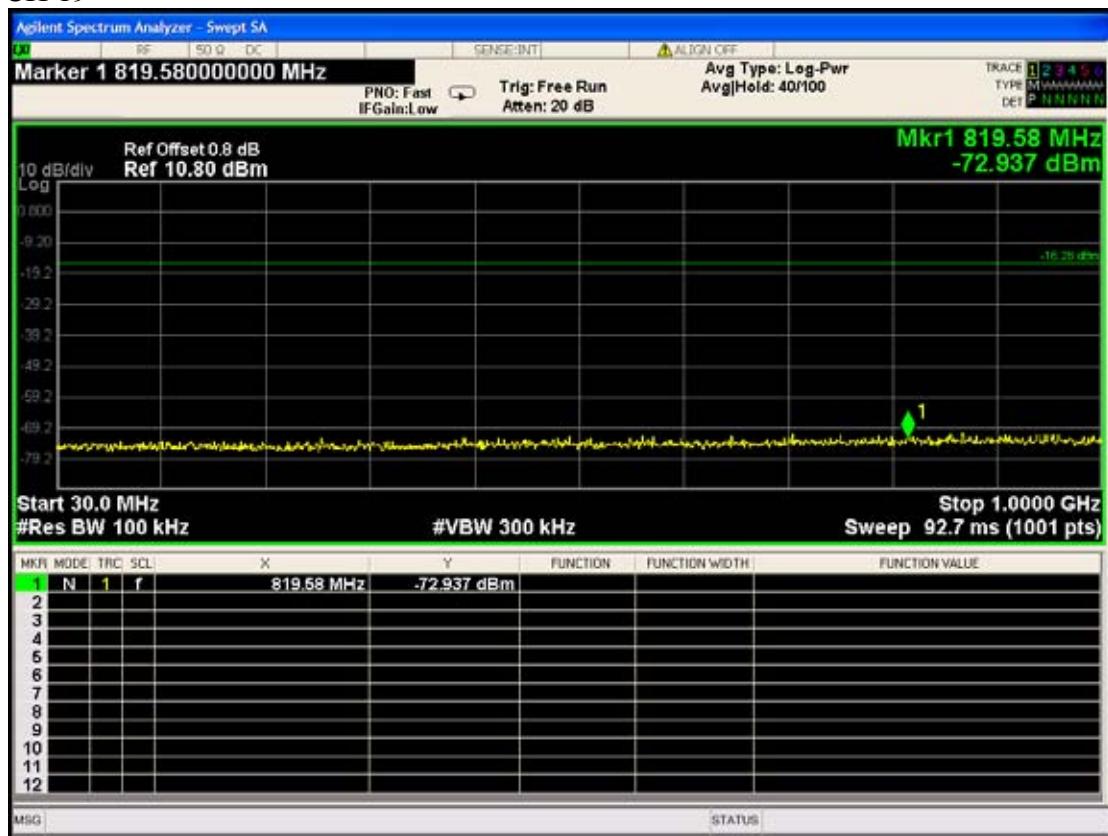


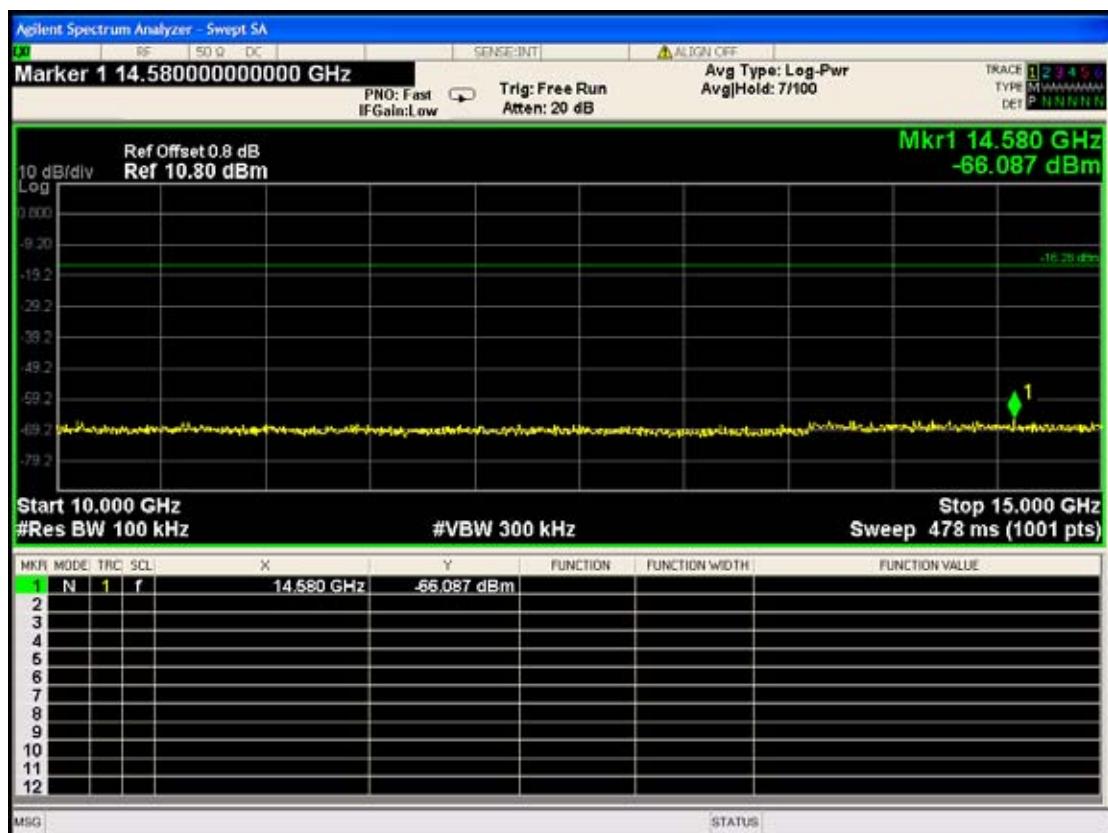
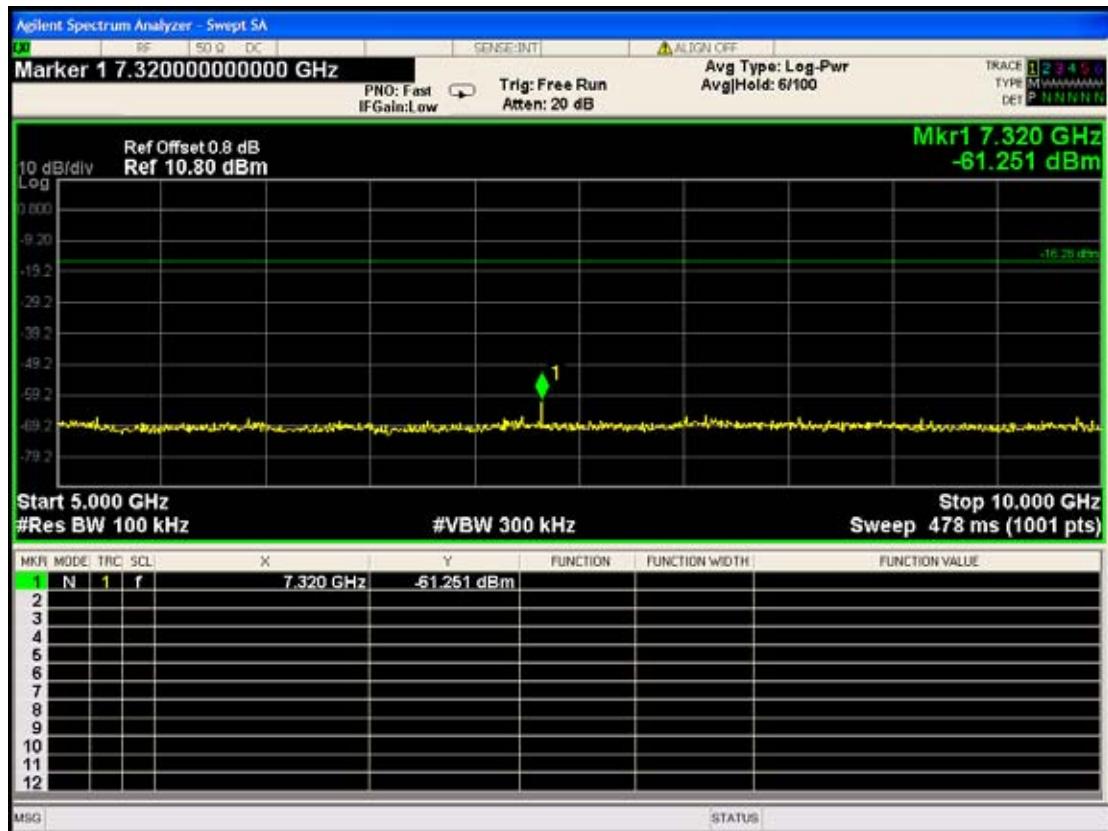


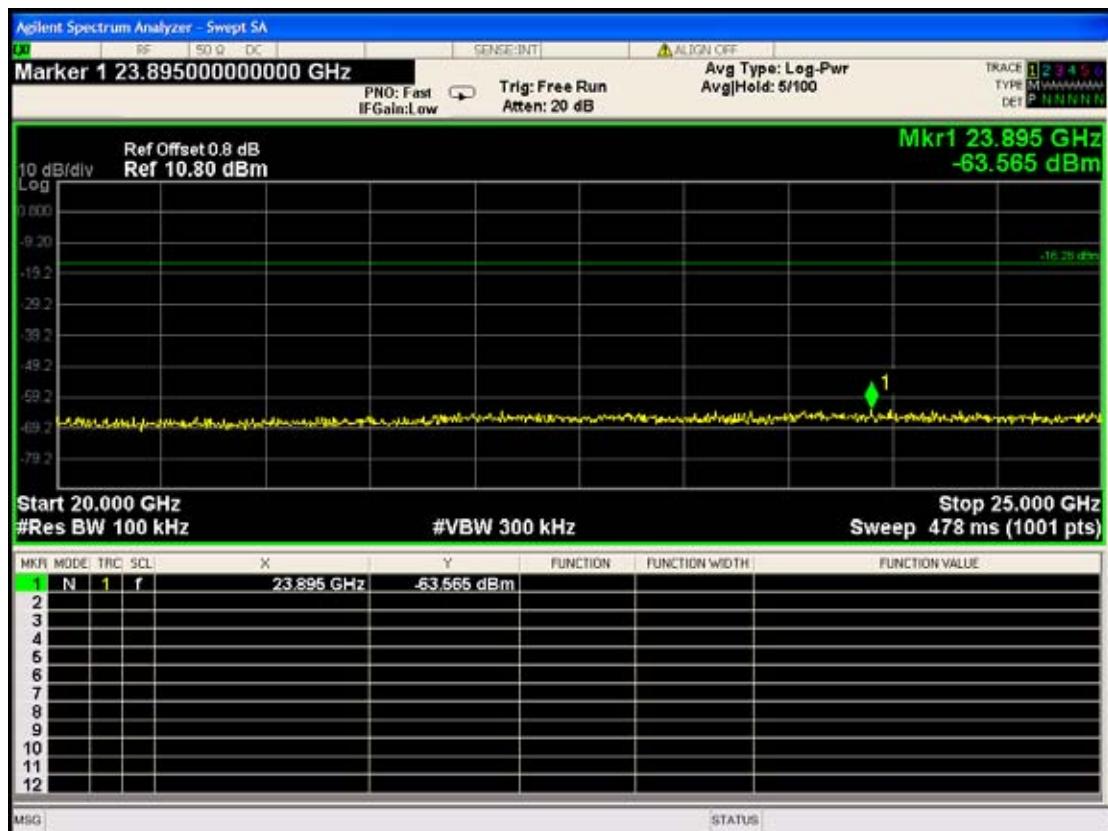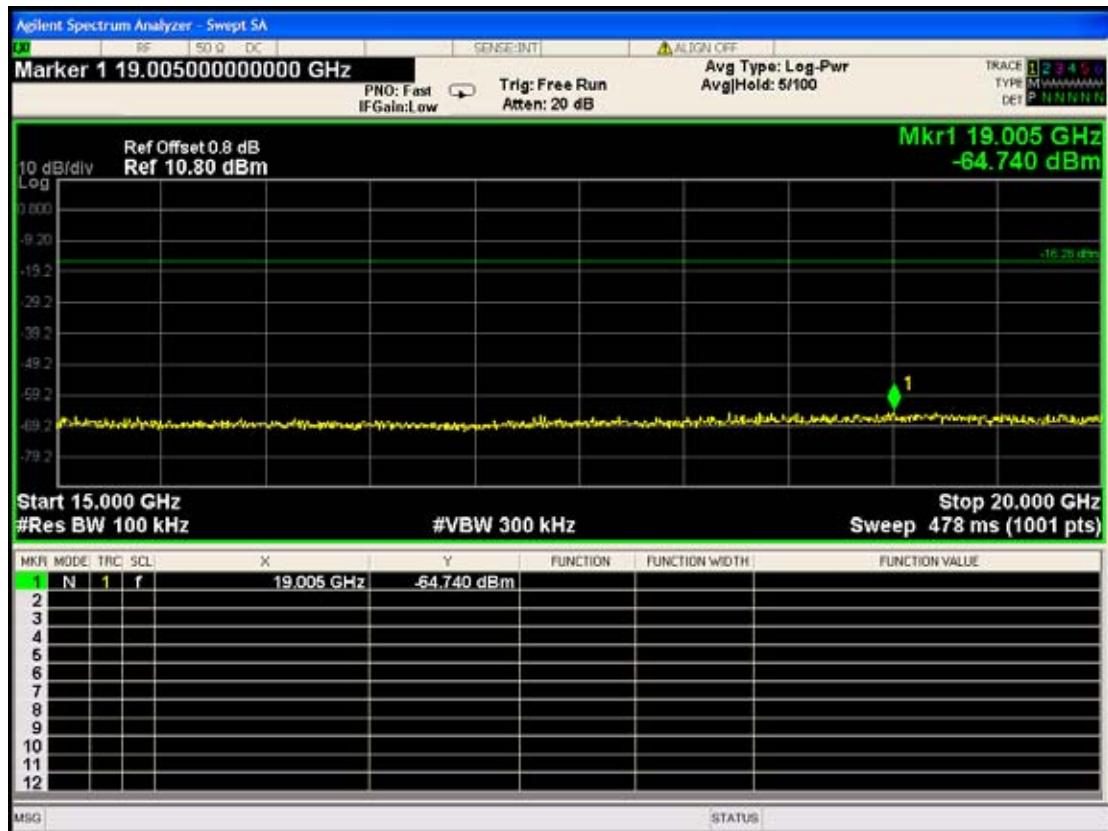

CH 39

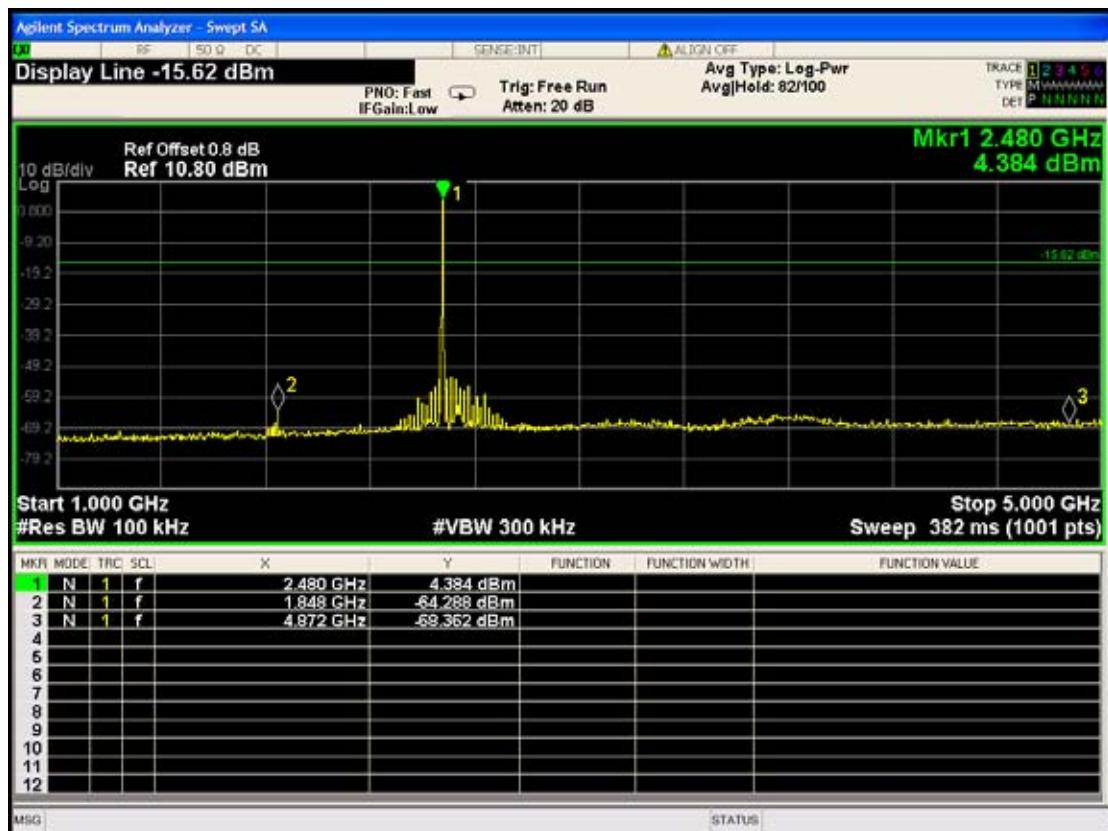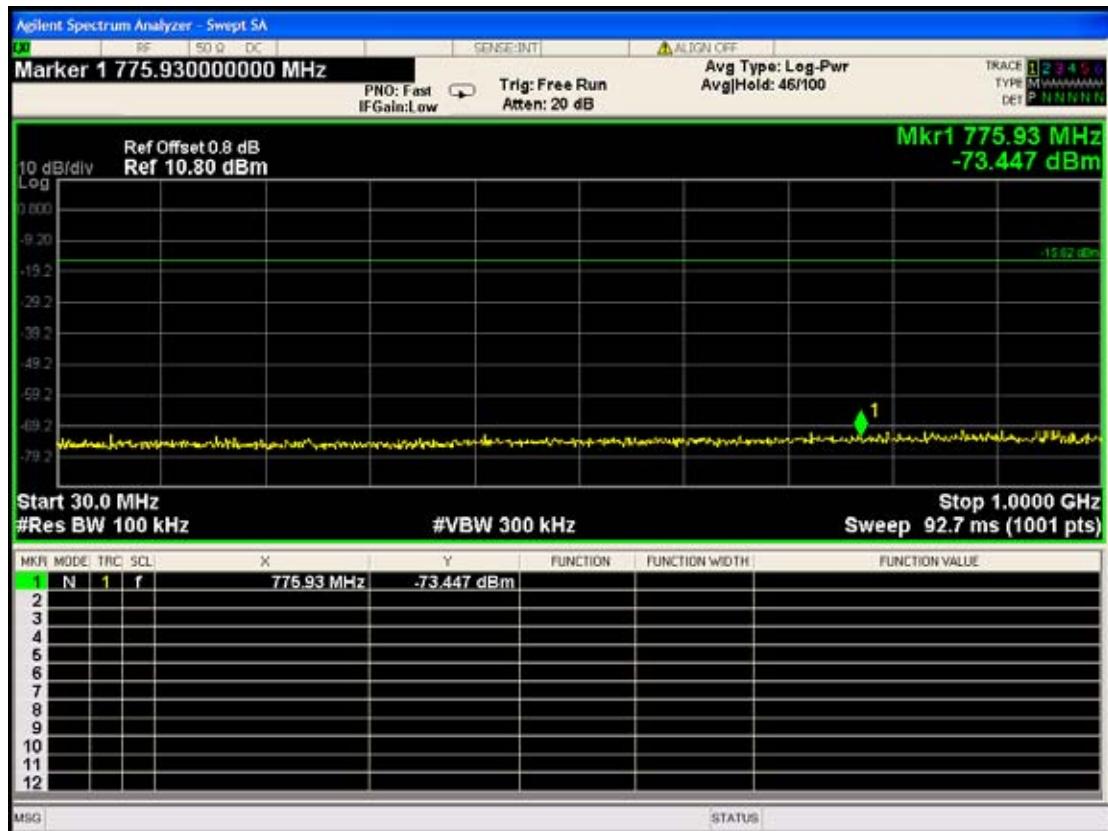

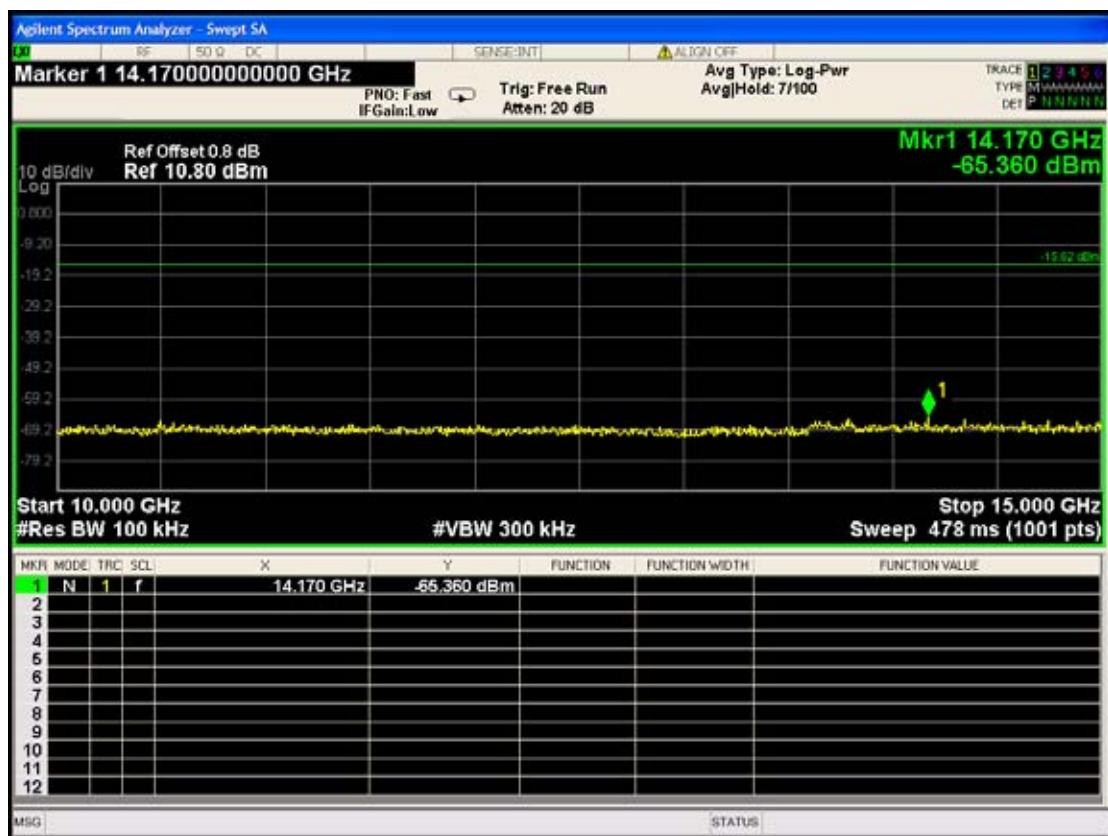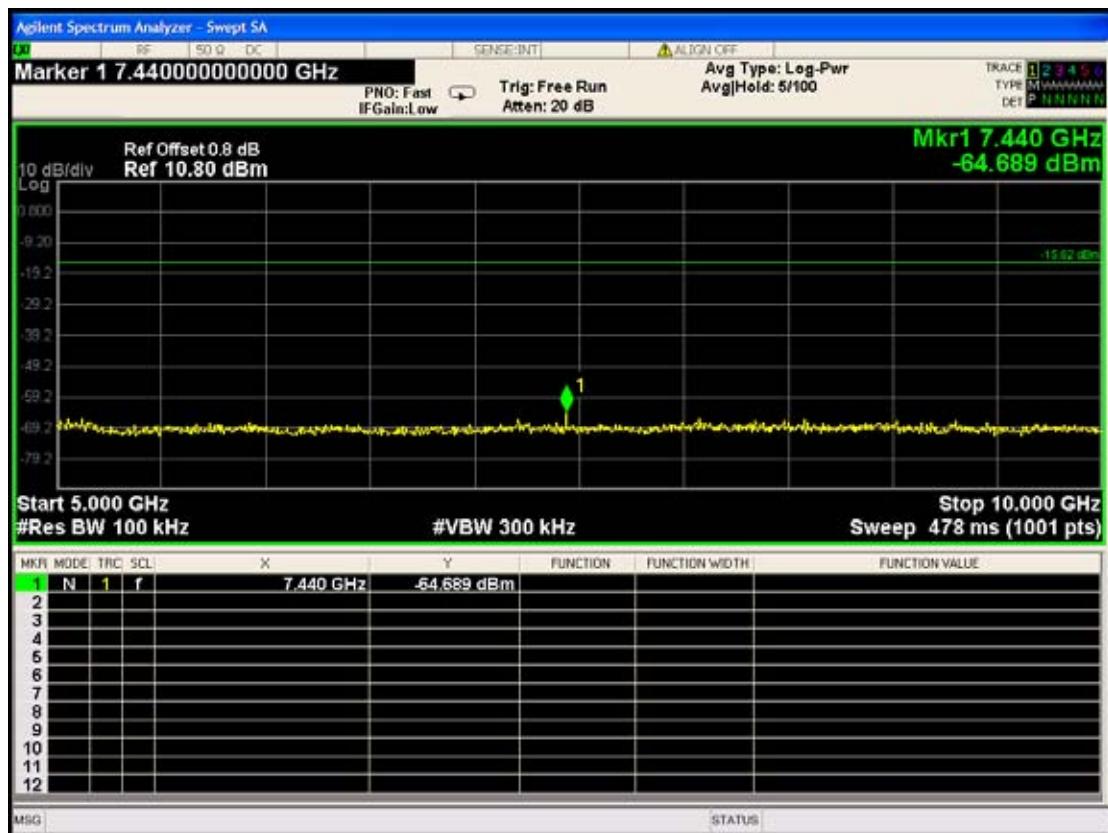

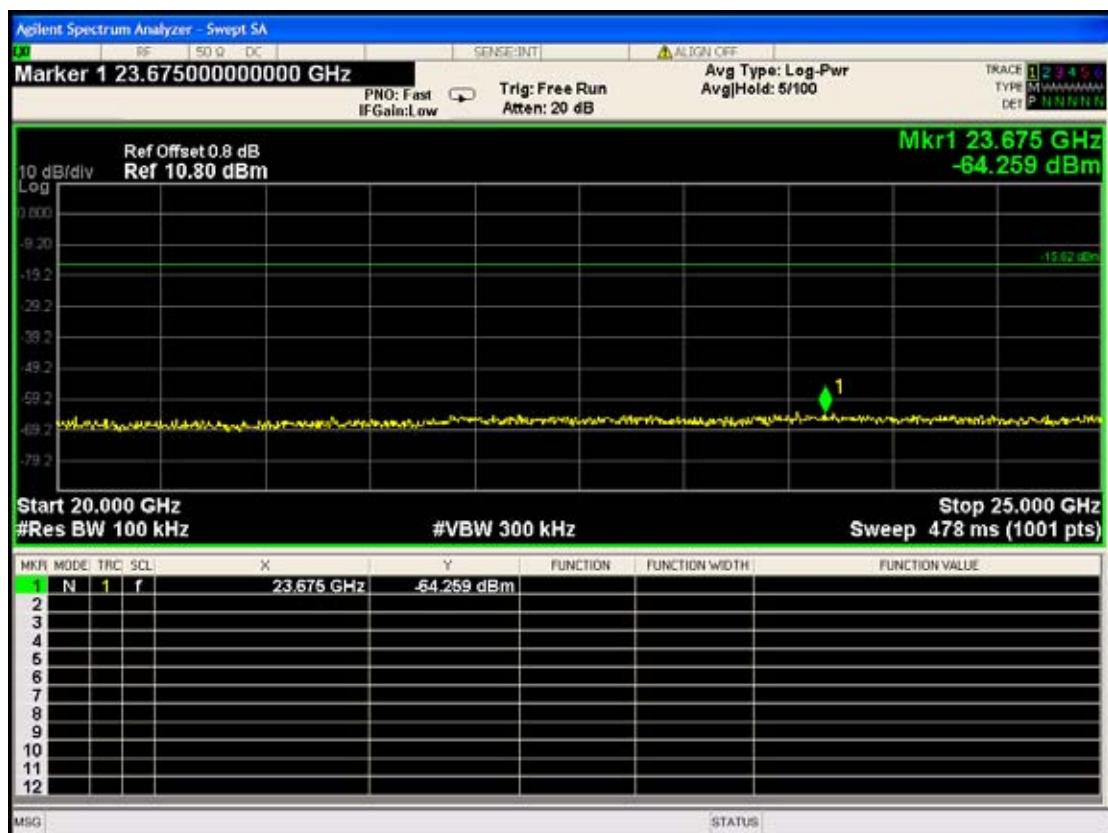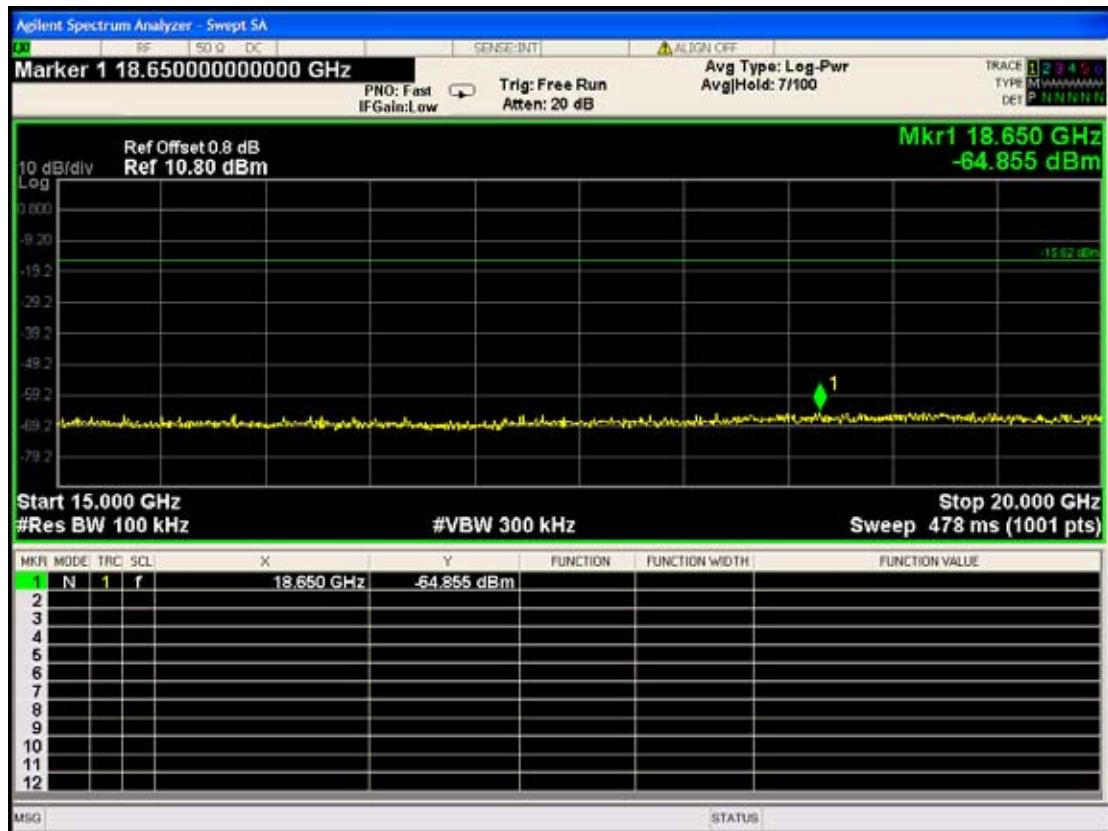

10. DEVIATION TO TEST SPECIFICATIONS

【NONE】