


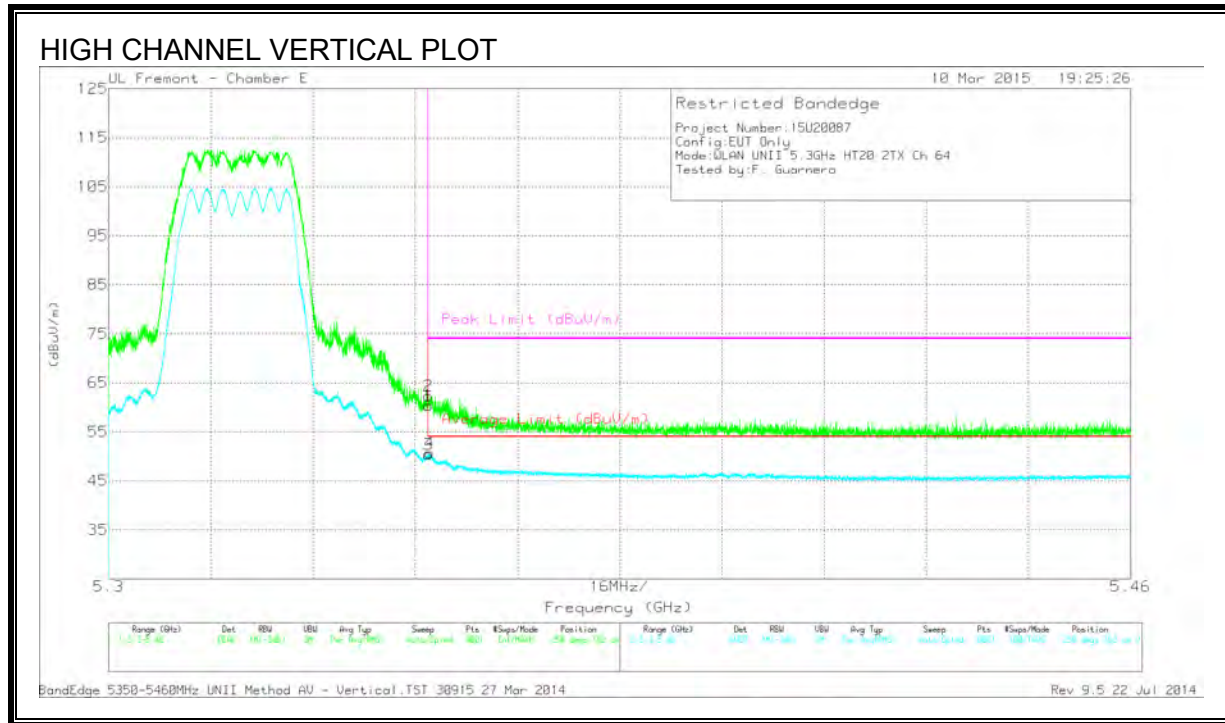

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	47.23	PK	34.5	-21.4	60.33	-	-	74	-13.67	250	162	V
2	* 5.35	49.18	PK	34.5	-21.4	62.28	-	-	74	-11.72	250	162	V
3	* 5.35	37.36	RMS	34.5	-21.4	50.46	54	-3.54	-	-	250	162	V
4	* 5.35	37.6	RMS	34.5	-21.4	50.7	54	-3.3	-	-	250	162	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

RMS - RMS detection

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

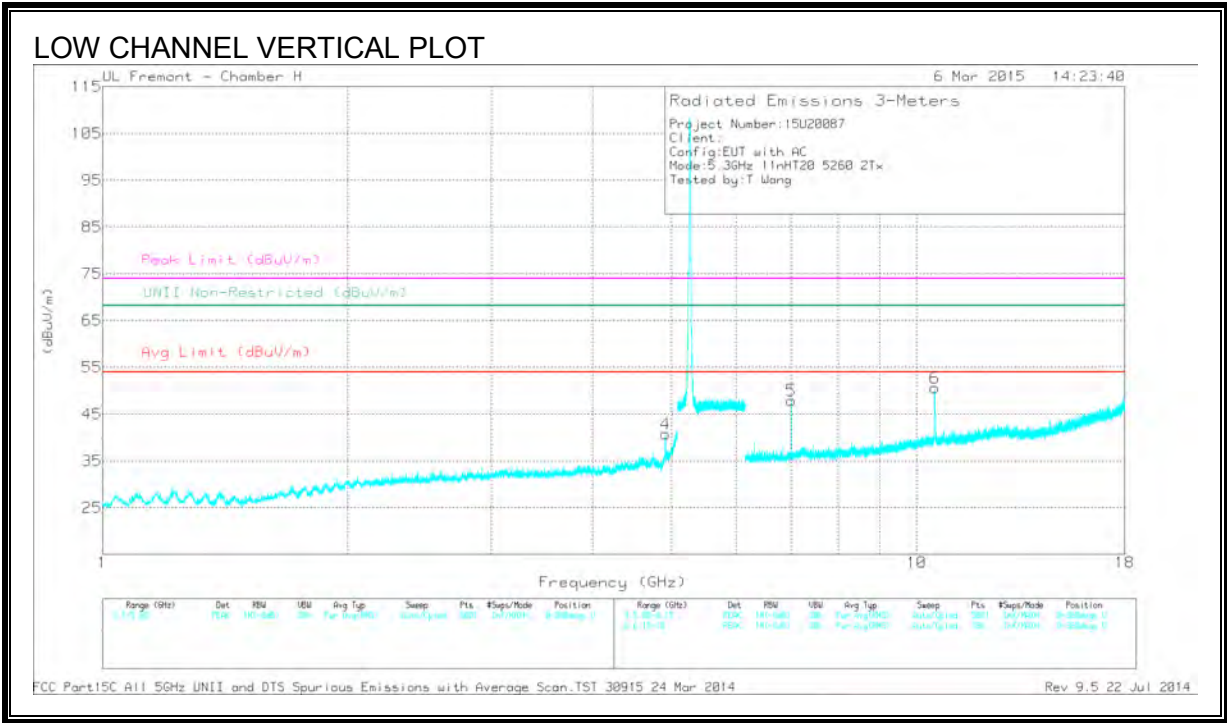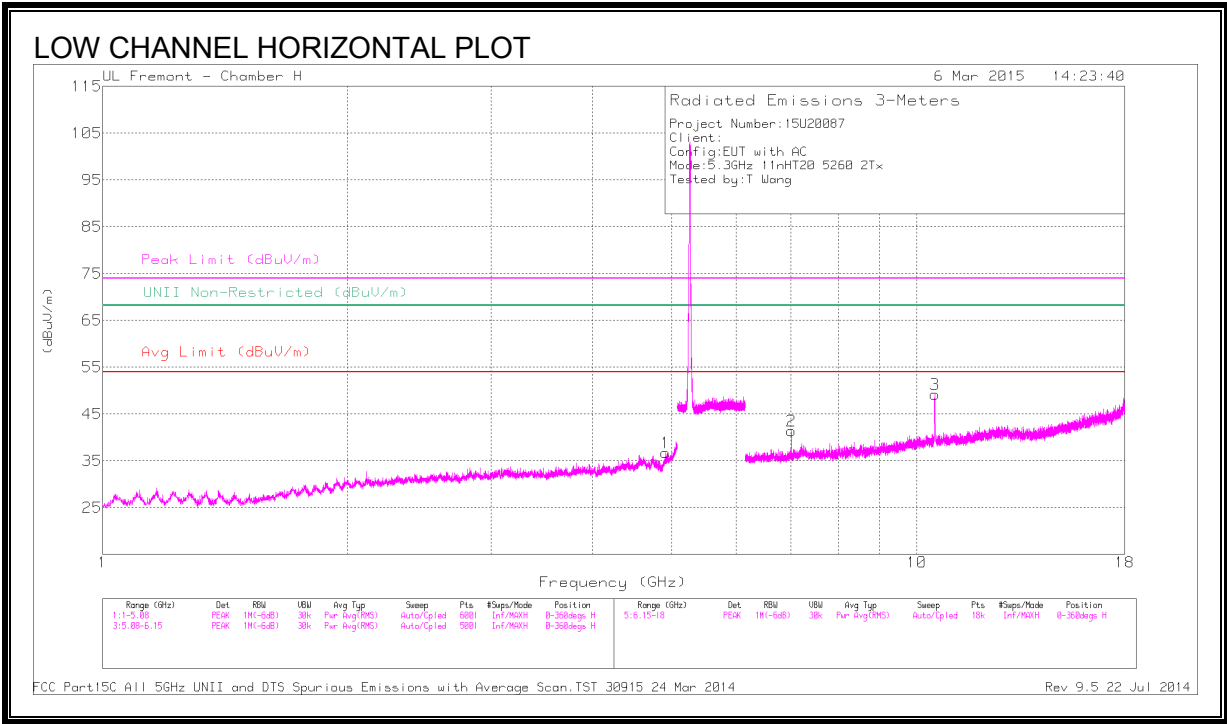

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.909	41.58	PK1	34.3	-31	44.88	-	-	74	-29.12	-	-	82	302	H
	* 4.909	32.85	AD1	34.3	-31	36.15	54	-17.85	-	-	-	-	82	302	H
4	* 4.909	45.39	PK1	34.3	-31	48.69	-	-	74	-25.31	-	-	27	138	V
	* 4.909	36.65	AD1	34.3	-31	39.95	54	-14.05	-	-	-	-	27	138	V
5	7.013	41.61	PK1	35.8	-29.6	47.81	-	-	-	-	68.2	-20.39	81	187	V
2	7.014	39.9	PK1	35.8	-29.6	46.1	-	-	-	-	68.2	-22.1	0	114	H
3	10.516	47.23	PK1	37.6	-25.6	59.23	-	-	-	-	68.2	-8.97	0	114	H
6	10.517	48.05	PK1	37.6	-25.6	60.05	-	-	-	-	68.2	-8.15	81	187	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS

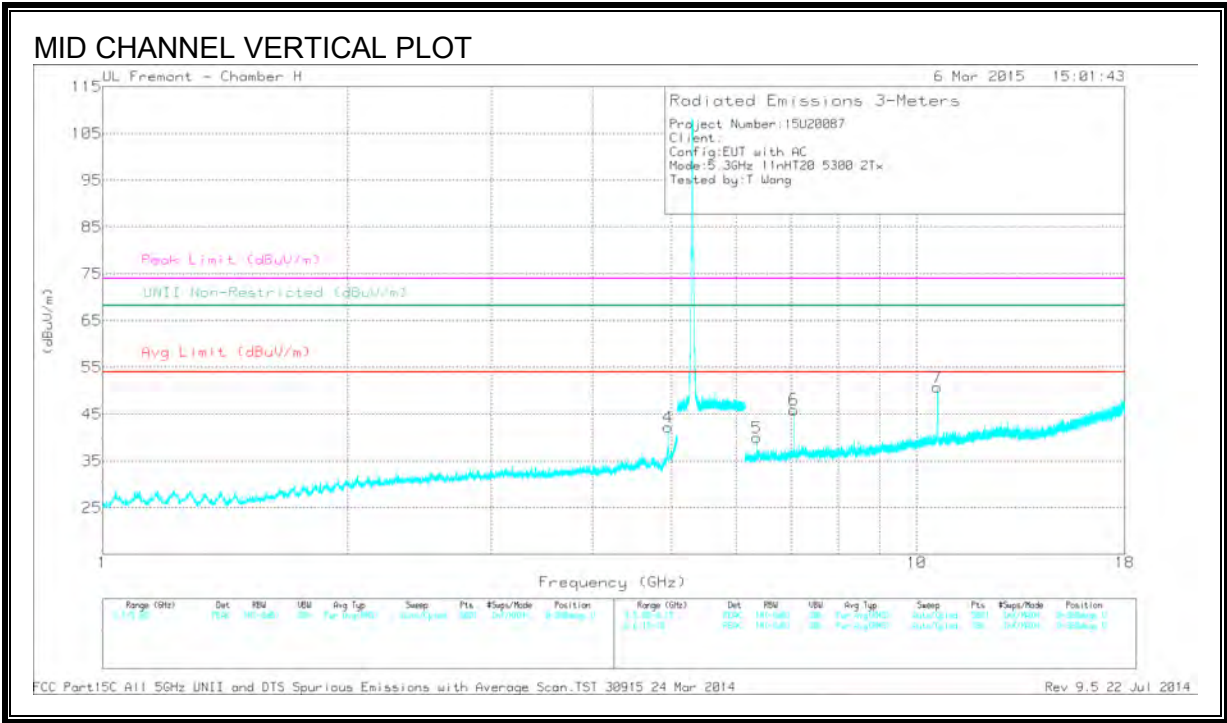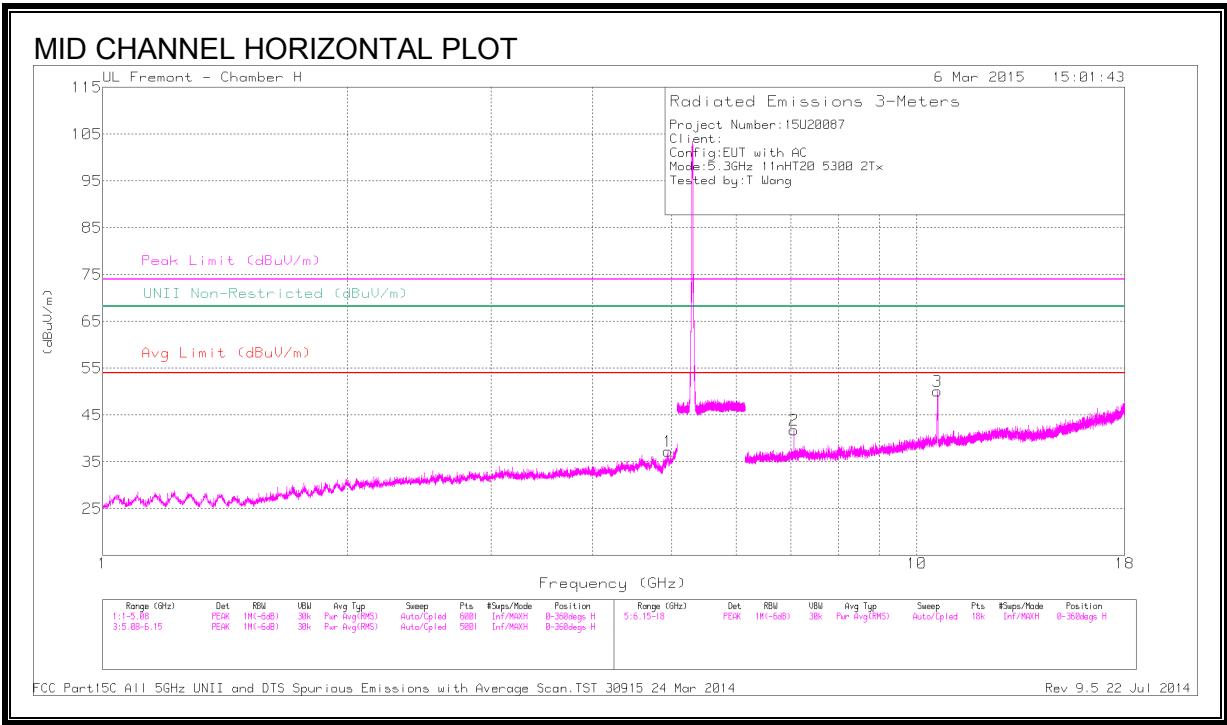

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.947	42.95	PK1	34.3	-31	46.25	-	-	74	-27.75	-	-	354	338	H
	* 4.947	33.98	AD1	34.3	-31	37.28	54	-16.72	-	-	-	-	354	338	H
4	* 4.946	45.68	PK1	34.3	-31	48.98	-	-	74	-25.02	-	-	43	153	V
	* 4.947	37.47	AD1	34.3	-31	40.77	54	-13.23	-	-	-	-	43	153	V
3	* 10.6	47.79	PK1	37.6	-25.5	59.89	-	-	74	-14.11	-	-	65	136	H
	* 10.6	36.29	AD1	37.6	-25.5	48.39	54	-5.61	-	-	-	-	65	136	H
7	* 10.601	47.67	PK1	37.6	-25.4	59.87	-	-	74	-14.13	-	-	80	204	V
	* 10.601	35.73	AD1	37.6	-25.4	47.93	54	-6.07	-	-	-	-	80	204	V
5	6.36	41.1	PK1	35.5	-30.6	46	-	-	-	-	68.2	-22.2	80	204	V
2	7.066	39.21	PK1	35.9	-30	45.11	-	-	-	-	68.2	-23.09	65	136	H
6	7.067	41.71	PK1	35.9	-30	47.61	-	-	-	-	68.2	-20.59	80	204	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS

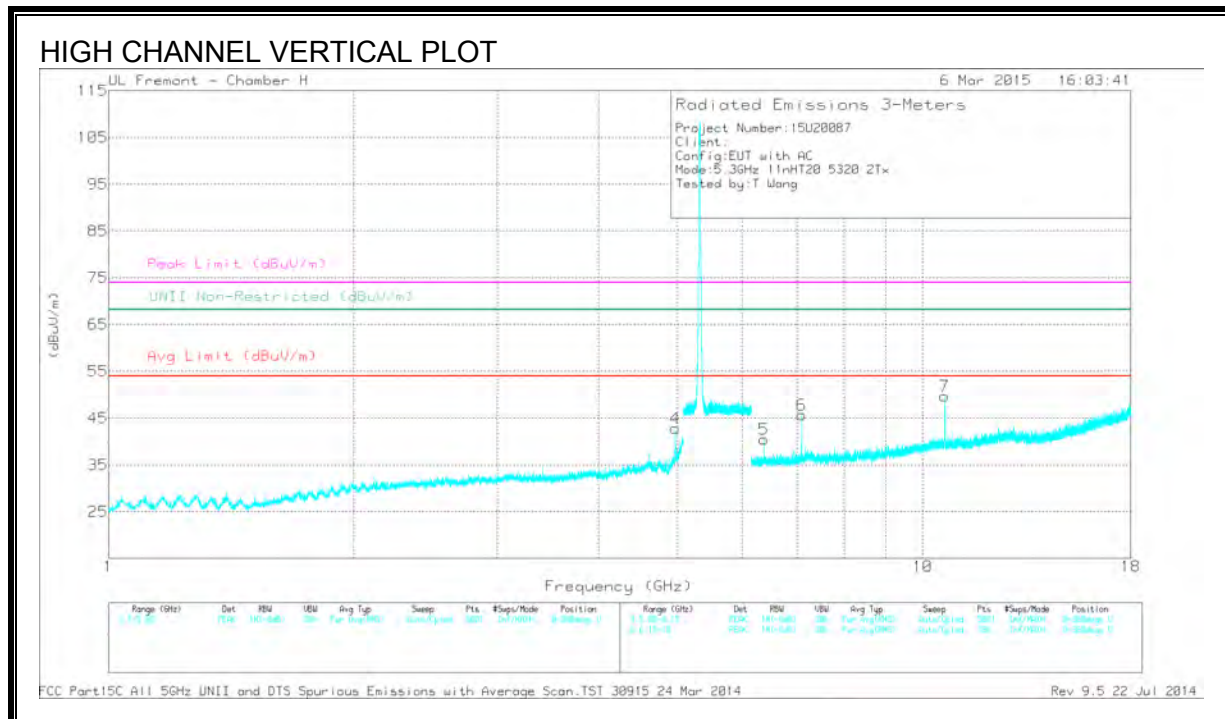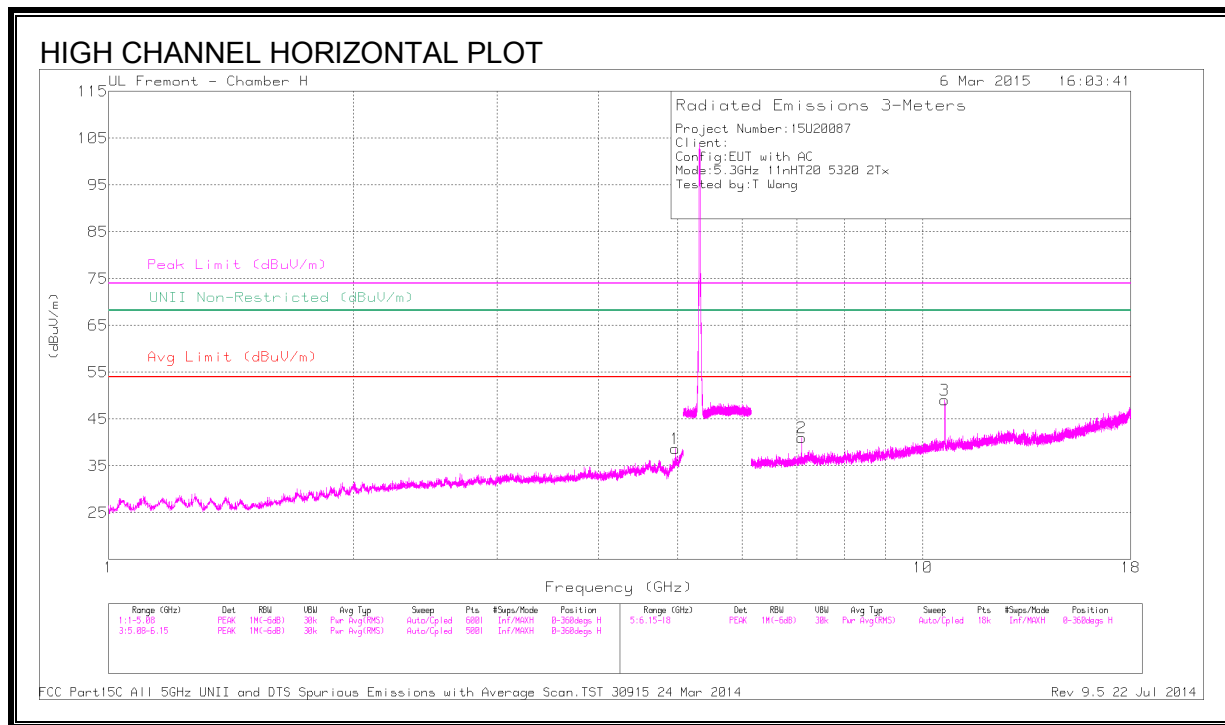

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.965	44.22	PK1	34.3	-31	47.52	-	-	74	-26.48	-	-	326	338	H
	* 4.965	35.38	AD1	34.3	-31	38.68	54	-15.32	-	-	-	-	326	338	H
4	* 4.965	46.8	PK1	34.3	-31	50.1	-	-	74	-23.9	-	-	39	328	V
	* 4.965	39.11	AD1	34.3	-31	42.41	54	-11.59	-	-	-	-	39	328	V
3	* 10.637	48.04	PK1	37.6	-25.6	60.04	-	-	74	-13.96	-	-	36	201	H
	* 10.636	34.97	AD1	37.6	-25.6	46.97	54	-7.03	-	-	-	-	36	201	H
7	* 10.636	48.43	PK1	37.6	-25.6	60.43	-	-	74	-13.57	-	-	72	204	V
	* 10.636	35.69	AD1	37.6	-25.6	47.69	54	-6.31	-	-	-	-	72	204	V
5	6.384	40.58	PK1	35.5	-30.4	45.68	-	-	-	-	68.2	-22.52	72	204	V
2	7.094	40.78	PK1	35.9	-30	46.68	-	-	-	-	68.2	-21.52	36	201	H
6	7.094	41.72	PK1	35.9	-30	47.62	-	-	-	-	68.2	-20.58	72	204	V


* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

9.10. 802.11n HT40 SISO MODE IN THE 5.3 GHz BAND

RESTRICTED BANDEDGE (HIGH CHANNEL)

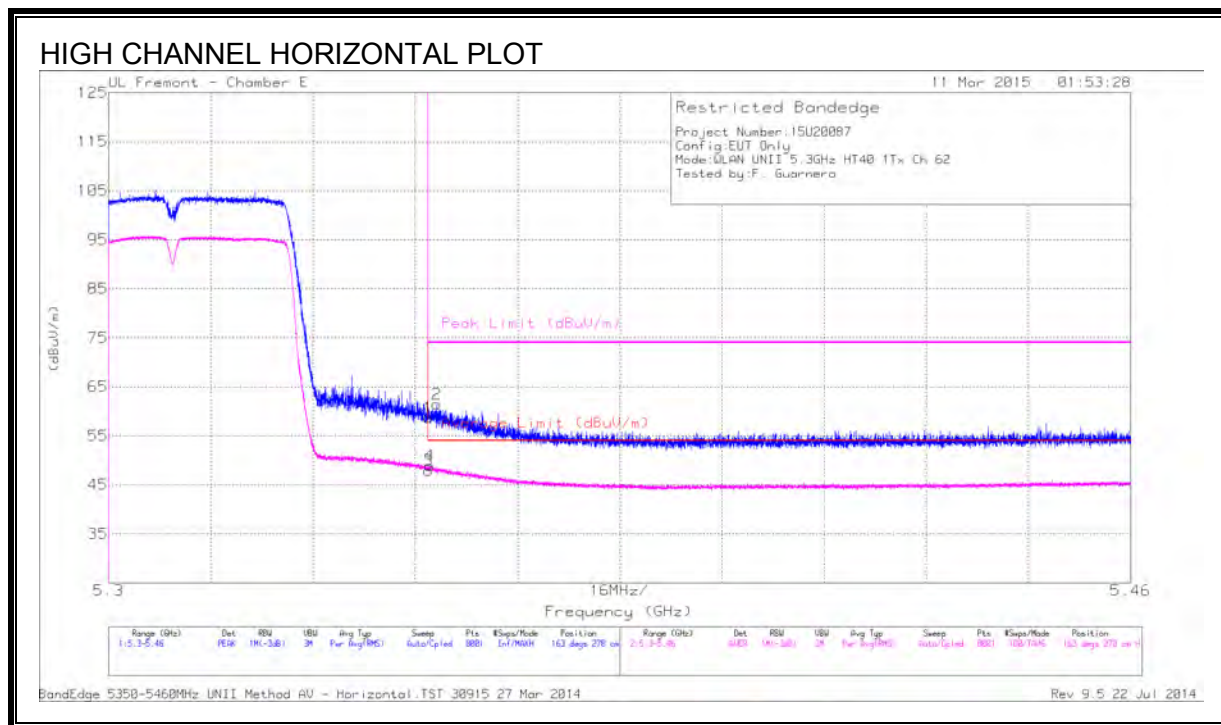


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	45.58	PK	34.5	-21.4	58.68	-	-	74	-15.32	163	278	H
2	* 5.351	48.38	PK	34.5	-21.4	61.48	-	-	74	-12.52	163	278	H
3	* 5.35	34.84	RMS	34.5	-21.4	47.94	54	-6.06	-	-	163	278	H
4	* 5.35	35.8	RMS	34.5	-21.4	48.9	54	-5.1	-	-	163	278	H

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

RMS - RMS detection


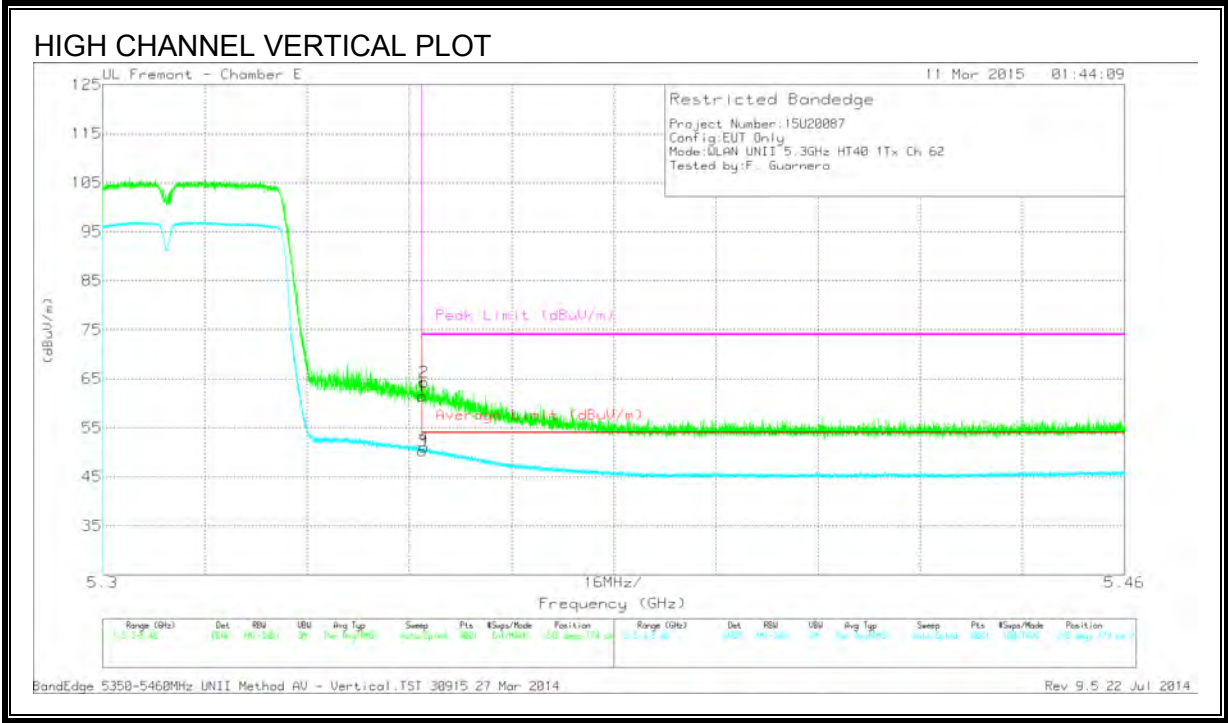


DATA

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	48.33	PK	34.5	-21.4	61.43	-	-	74	-12.57	245	174	V
2	* 5.35	51.21	PK	34.5	-21.4	64.31	-	-	74	-9.69	245	174	V
3	* 5.35	37.16	RMS	34.5	-21.4	50.26	54	-3.74	-	-	245	174	V
4	* 5.35	37.93	RMS	34.5	-21.4	51.03	54	-2.97	-	-	245	174	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.
PK - Peak detector
RMS - RMS detection

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

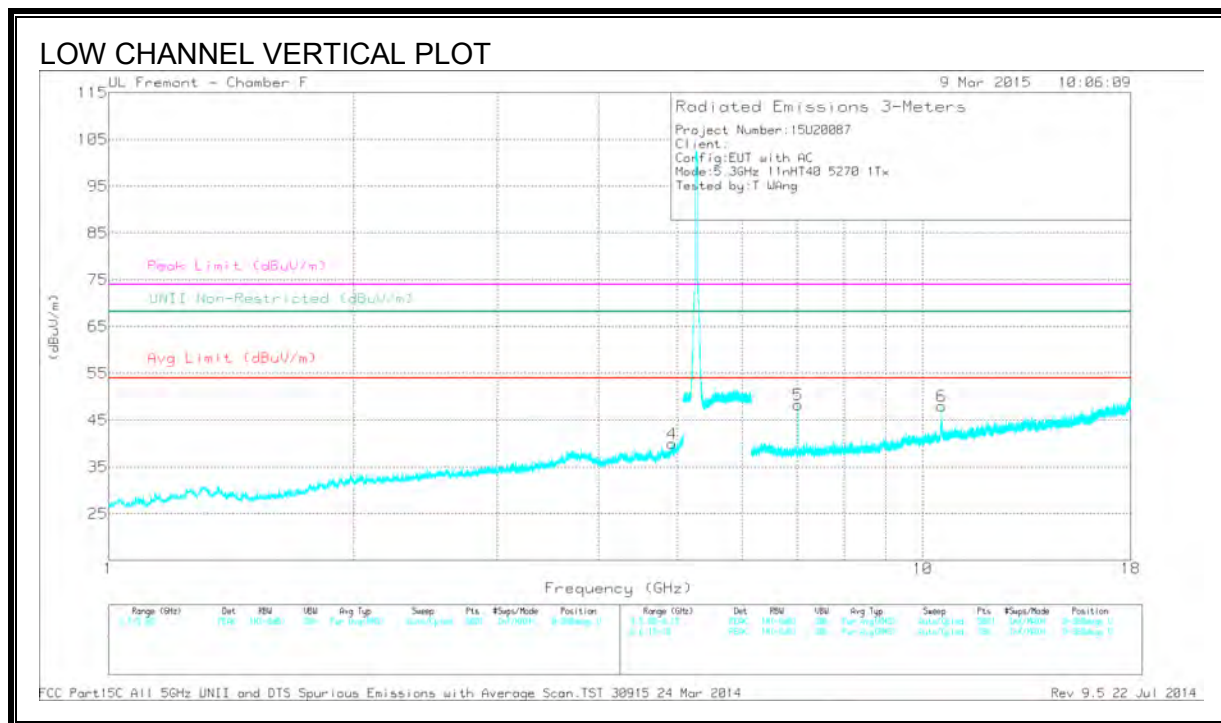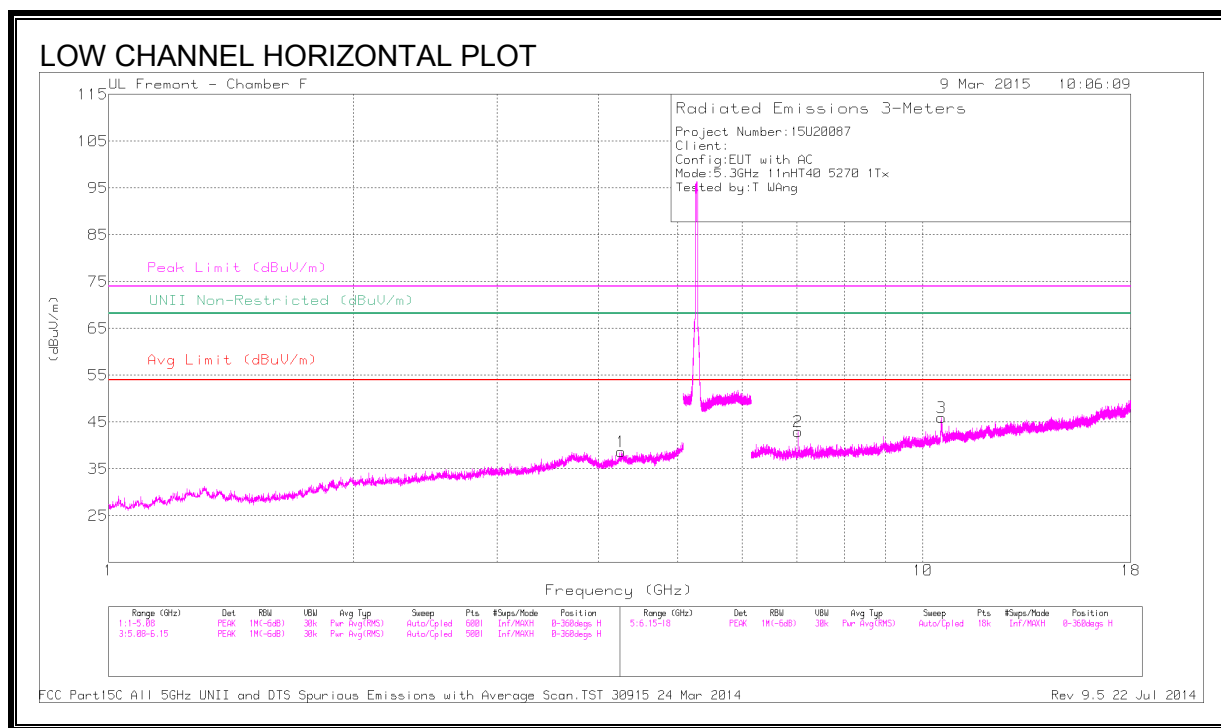

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.261	37.18	PK1	33.7	-26.7	44.18	-	-	74	-29.82	-	-	357	399	H
	* 4.264	26.04	AD1	33.7	-26.7	33.04	54	-20.96	-	-	-	-	357	399	H
4	* 4.919	39.65	PK1	34.2	-27	46.85	-	-	74	-27.15	-	-	71	152	V
	* 4.919	29.61	AD1	34.2	-27	36.81	54	-17.19	-	-	-	-	71	152	V
3	10.541	37.4	PK1	37.7	-22	53.1	-	-	-	-	68.2	-15.1	9	115	H
2	7.027	38.11	PK1	35.5	-25.8	47.81	-	-	-	-	68.2	-20.39	9	115	H
5	7.027	41.92	PK1	35.5	-25.8	51.62	-	-	-	-	68.2	-16.58	24	110	V
6	10.542	34.62	PK1	37.8	-22	50.42	-	-	-	-	68.2	-17.78	24	110	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS

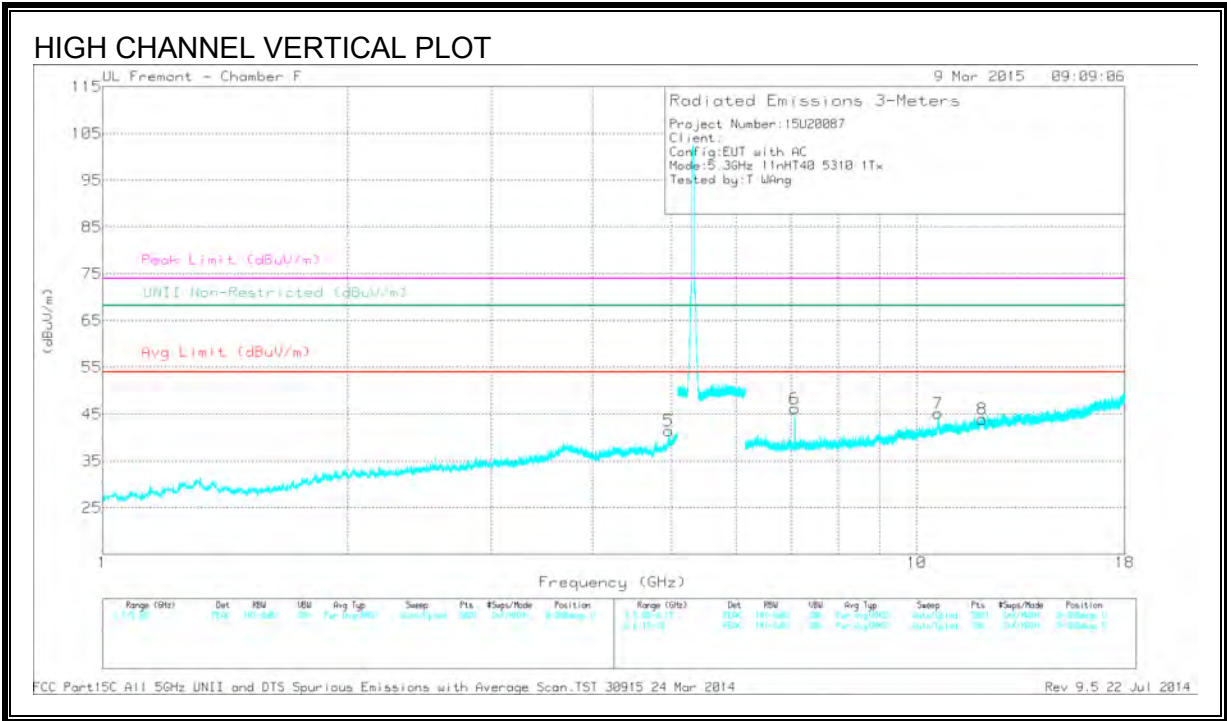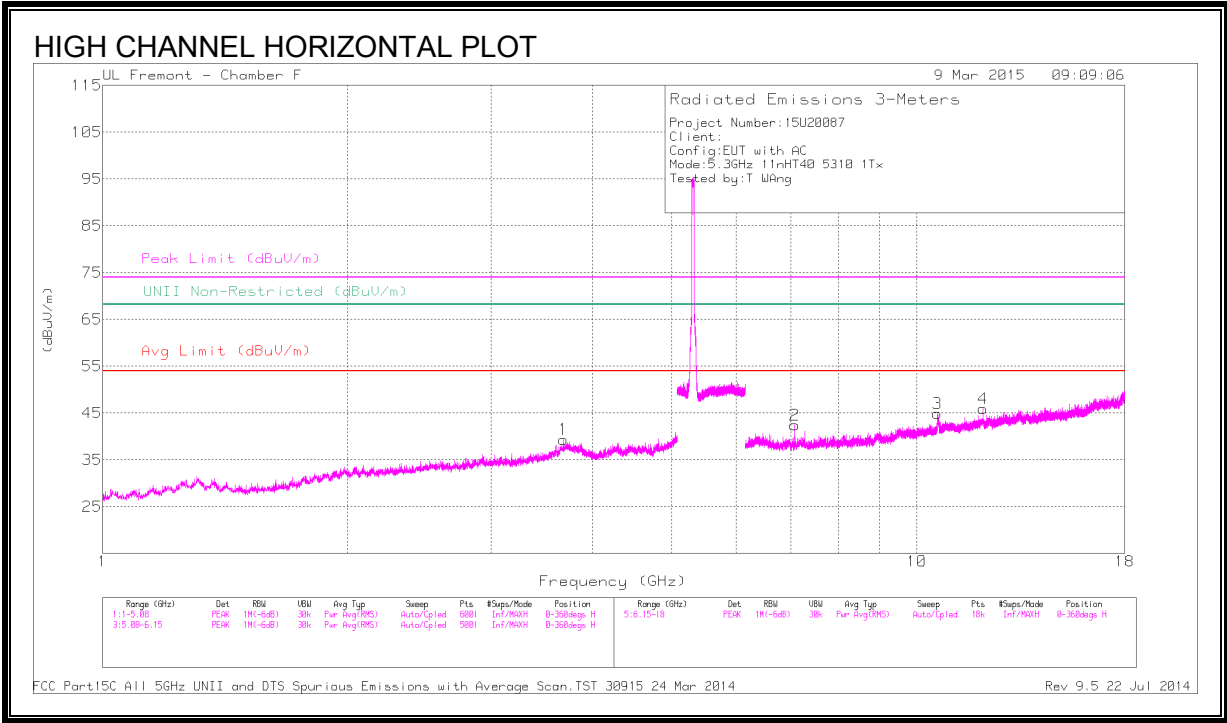

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.684	39.32	PK1	34.9	-28.7	45.52	-	-	74	-28.48	-	-	61	189	H
	* 3.684	26.76	AD1	34.9	-28.7	32.96	54	-21.04	-	-	-	-	61	189	H
5	* 4.955	40.31	PK1	34.2	-27.2	47.31	-	-	74	-26.69	-	-	53	241	V
	* 4.956	30.6	AD1	34.2	-27.2	37.6	54	-16.4	-	-	-	-	53	241	V
3	* 10.604	38.03	PK1	37.9	-21.5	54.43	-	-	74	-19.57	-	-	41	120	H
	* 10.606	25.7	AD1	37.9	-21.5	42.1	54	-11.9	-	-	-	-	41	120	H
4	* 12.048	34.46	PK1	39	-21.6	51.86	-	-	74	-22.14	-	-	41	120	H
	* 12.05	23.74	AD1	39	-21.6	41.14	54	-12.86	-	-	-	-	41	120	H
2	7.08	37.82	PK1	35.5	-26.2	47.12	-	-	-	-	68.2	-21.08	41	120	H
7	* 10.619	37.01	PK1	37.9	-21.4	53.51	-	-	74	-20.49	-	-	86	189	V
	* 10.617	25.18	AD1	37.9	-21.3	41.78	54	-12.22	-	-	-	-	86	189	V
8	* 12.042	35.98	PK1	39	-21.6	53.38	-	-	74	-20.62	-	-	86	189	V
	* 12.042	23.57	AD1	39	-21.6	40.97	54	-13.03	-	-	-	-	86	189	V
6	7.08	39.12	PK1	35.5	-26.2	48.42	-	-	-	-	68.2	-19.78	86	189	V


* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

9.11. 802.11n HT40 2Tx CDD MODE IN THE 5.3 GHz BAND

RESTRICTED BANDEDGE (HIGH CHANNEL)

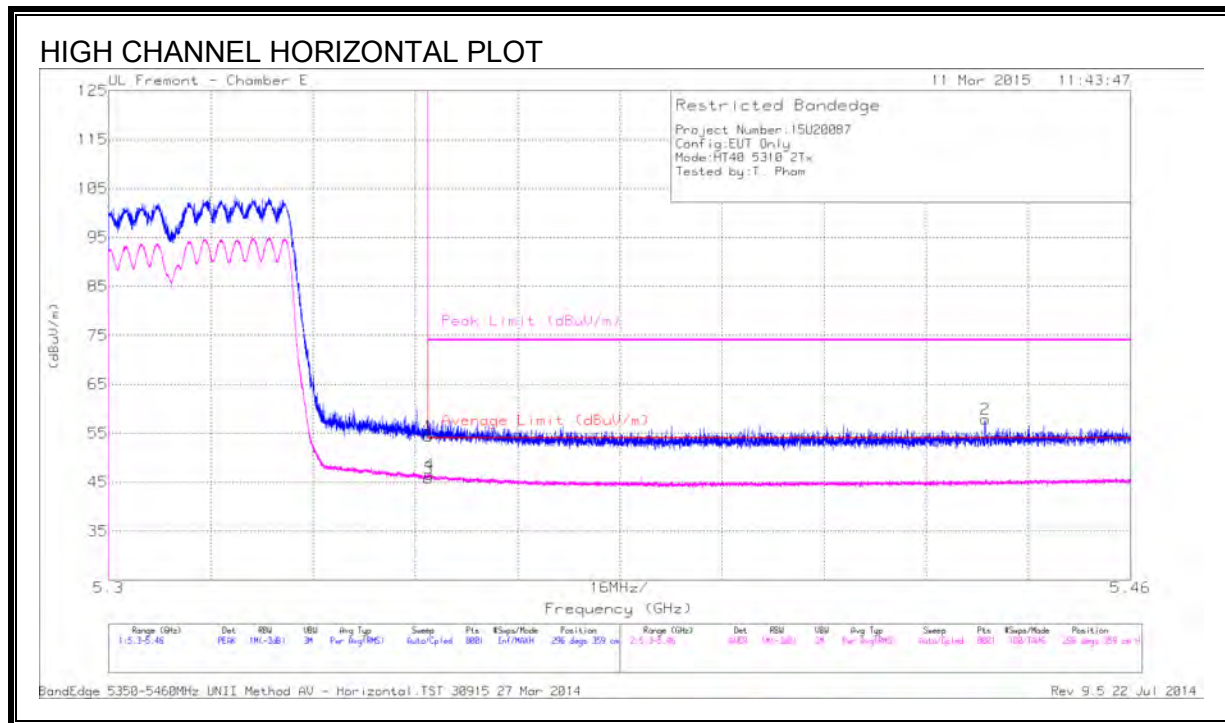


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	41.26	PK	34.5	-21.4	54.36	-	-	74	-19.64	296	359	H
2	* 5.437	44.27	PK	34.6	-21	57.87	-	-	74	-16.13	296	359	H
3	* 5.35	32.73	RMS	34.5	-21.4	45.83	54	-8.17	-	-	296	359	H
4	* 5.35	33.48	RMS	34.5	-21.4	46.58	54	-7.42	-	-	296	359	H

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

RMS - RMS detection

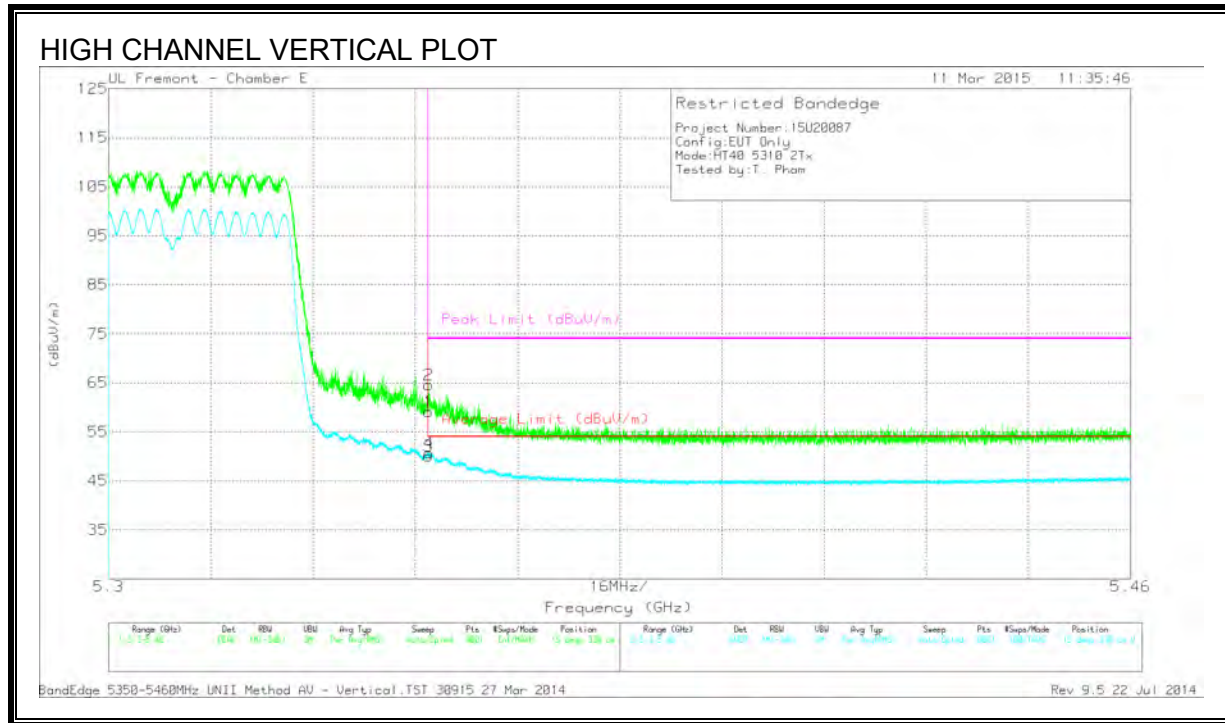

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	46.03	PK	34.5	-21.4	59.13	-	-	74	-14.87	15	330	V
2	* 5.35	51.49	PK	34.5	-21.4	64.59	-	-	74	-9.41	15	330	V
3	* 5.35	36.96	RMS	34.5	-21.4	50.06	54	-3.94	-	-	15	330	V
4	* 5.35	37.61	RMS	34.5	-21.4	50.71	54	-3.29	-	-	15	330	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

RMS - RMS detection

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

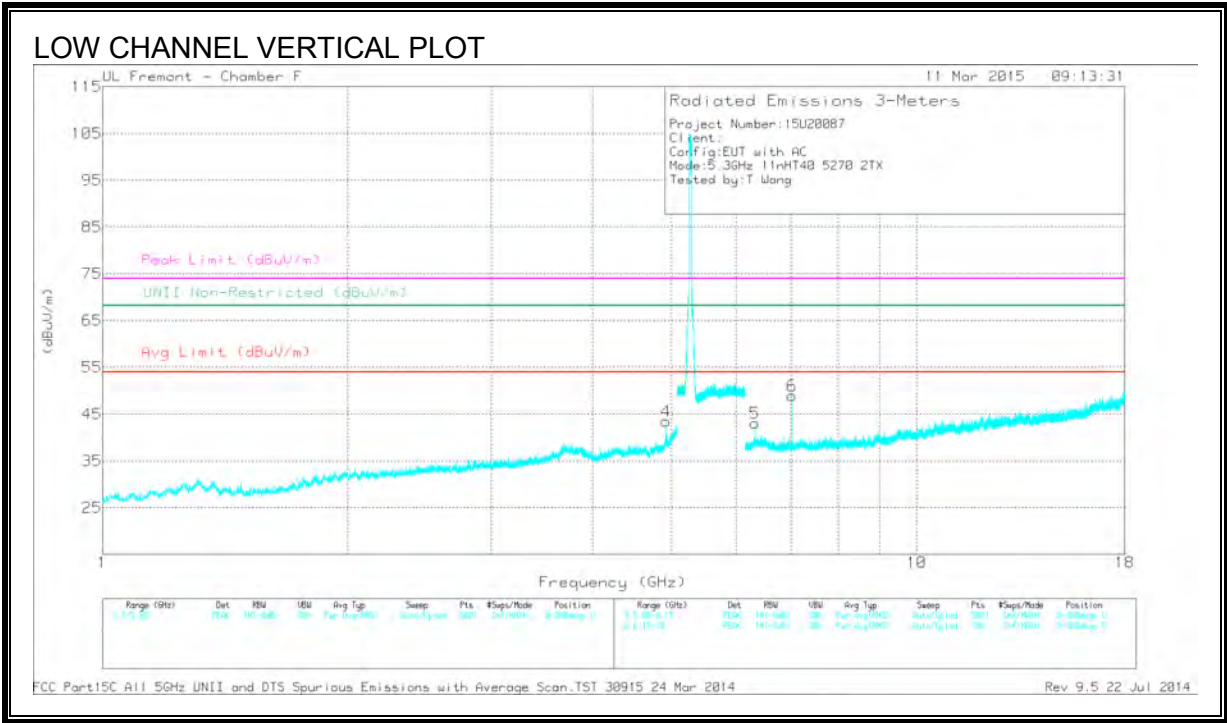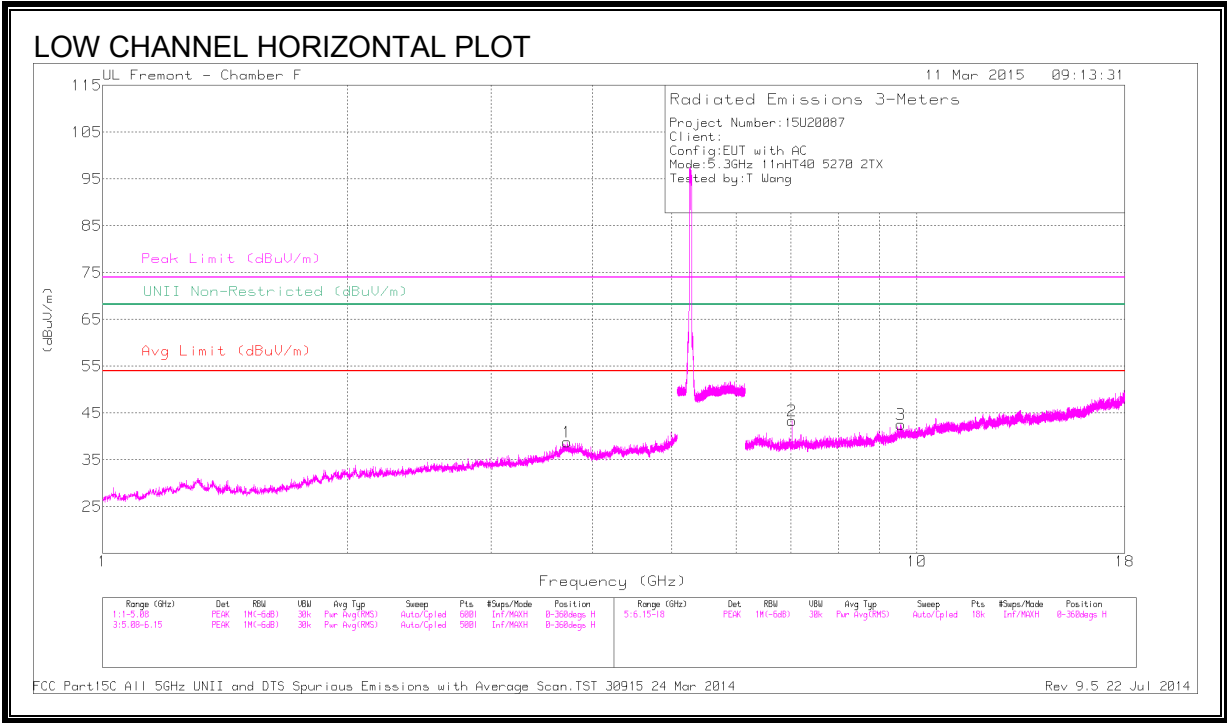

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.721	39.27	PK1	34.8	-29	45.07	-	-	74	-28.93	-	-	201	330	H
	* 3.72	27.21	AD1	34.8	-29	33.01	54	-20.99	-	-	-	-	201	330	H
4	* 4.918	41.65	PK1	34.2	-27	48.85	-	-	74	-25.15	-	-	62	112	V
	* 4.919	33.29	AD1	34.2	-27	40.49	54	-13.51	-	-	-	-	62	112	V
2	7.028	36.98	PK1	35.5	-25.8	46.68	-	-	-	-	68.2	-21.52	201	330	H
3	9.55	34.1	PK1	36.9	-21.6	49.4	-	-	-	-	68.2	-18.8	201	330	H
5	7.027	41.32	PK1	35.5	-25.8	51.02	-	-	-	-	68.2	-17.18	62	112	V
6	6.323	38.06	PK1	35.5	-26.3	47.26	-	-	-	-	68.2	-20.94	62	112	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS

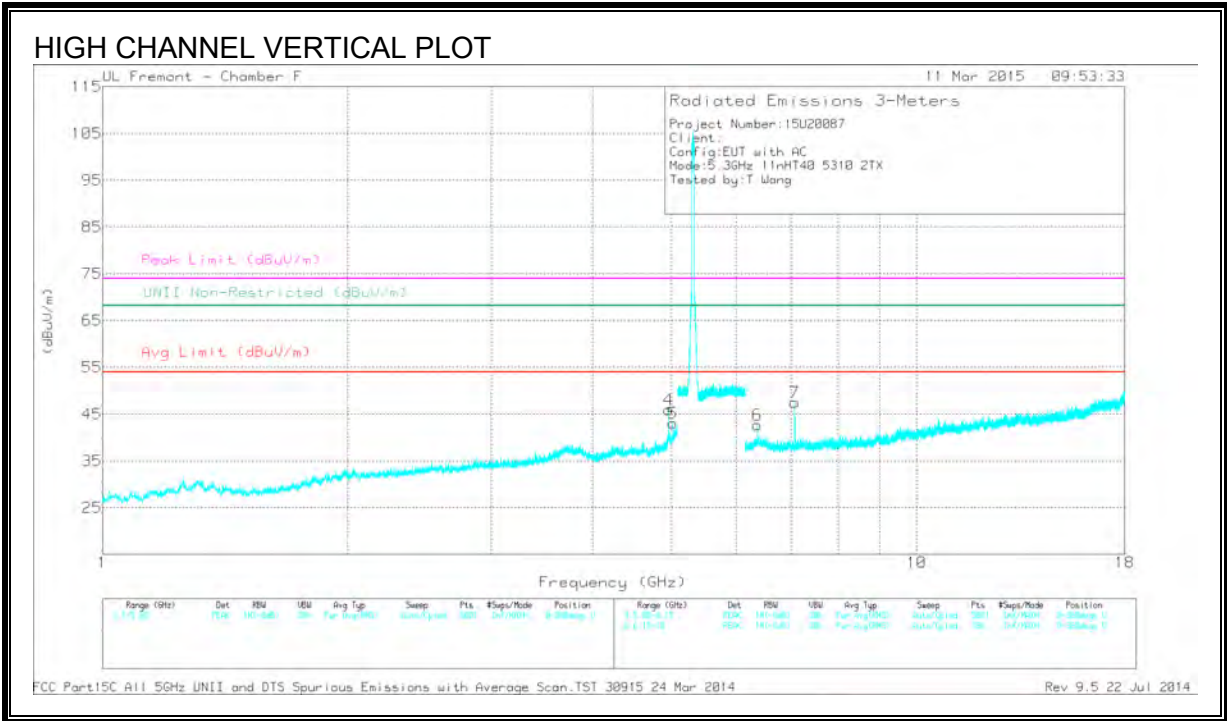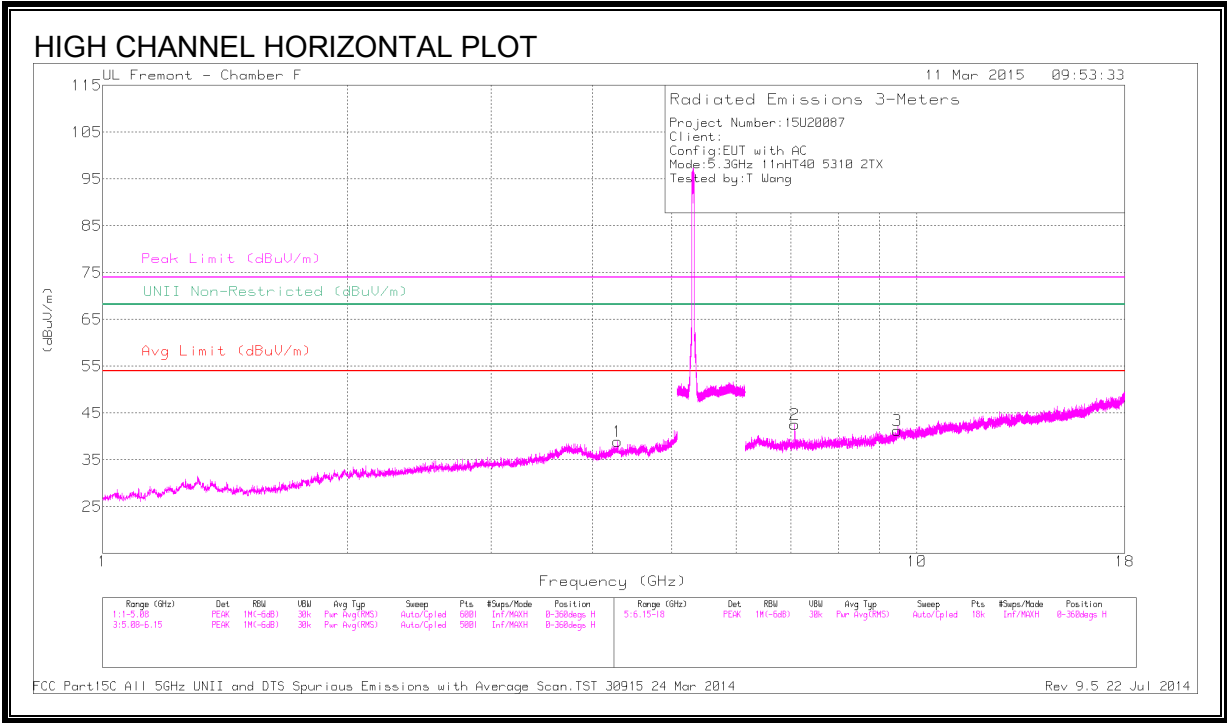

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/FI tri/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.291	37.73	PK1	33.7	-27.1	44.33	-	-	74	-29.67	-	-	93	191	H
	* 4.287	26.14	AD1	33.7	-27.1	32.74	54	-21.26	-	-	-	-	93	191	H
4	* 4.956	43.03	PK1	34.2	-27.2	50.03	-	-	74	-23.97	-	-	58	347	V
	* 4.956	35.32	AD1	34.2	-27.2	42.32	54	-11.68	-	-	-	-	58	347	V
5	* 5.019	40.37	PK1	34.2	-26.7	47.87	-	-	74	-26.13	-	-	58	347	V
	* 5.019	29.55	AD1	34.3	-26.7	37.15	54	-16.85	-	-	-	-	58	347	V
3	* 9.456	33.51	PK1	36.7	-22.1	48.11	-	-	74	-25.89	-	-	93	191	H
	* 9.454	23.04	AD1	36.7	-22.2	37.54	54	-16.46	-	-	-	-	93	191	H
2	7.081	36.91	PK1	35.5	-26.2	46.21	-	-	-	-	68.2	-21.99	93	191	H
6	6.372	39.22	PK1	35.6	-26.3	48.52	-	-	-	-	68.2	-19.68	58	347	V
7	7.08	39.59	PK1	35.5	-26.2	48.89	-	-	-	-	68.2	-19.31	58	347	V


* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

9.12. 802.11ac VHT80 1TX SISO MODE IN THE 5.3 GHz BAND

RESTRICTED BANDEDGE (HIGH CHANNEL, CH 58)

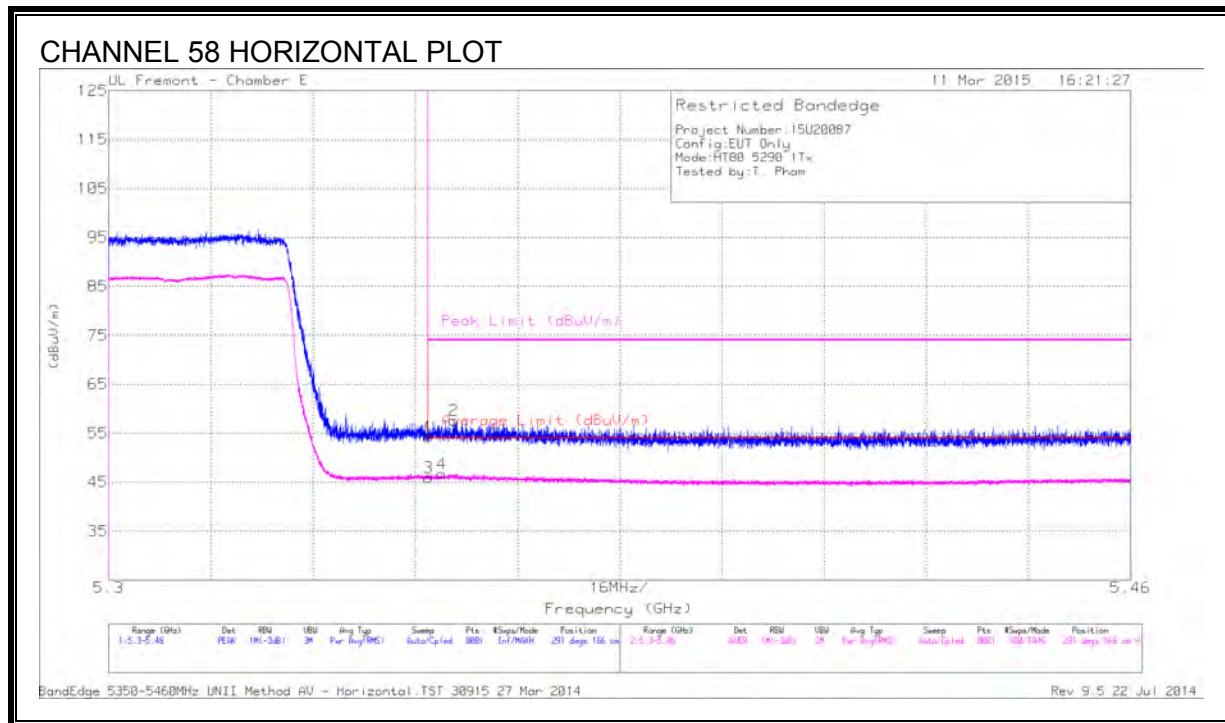


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	41.19	PK	34.5	-21.4	0	54.29	-	-	74	-19.71	291	166	H
2	* 5.354	44.57	PK	34.5	-21.4	0	57.67	-	-	74	-16.33	291	166	H
3	* 5.35	32.8	RMS	34.5	-21.4	.16	46.06	54	-7.94	-	-	291	166	H
4	* 5.352	33.59	RMS	34.5	-21.4	.16	46.85	54	-7.15	-	-	291	166	H

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

RMS - RMS detection

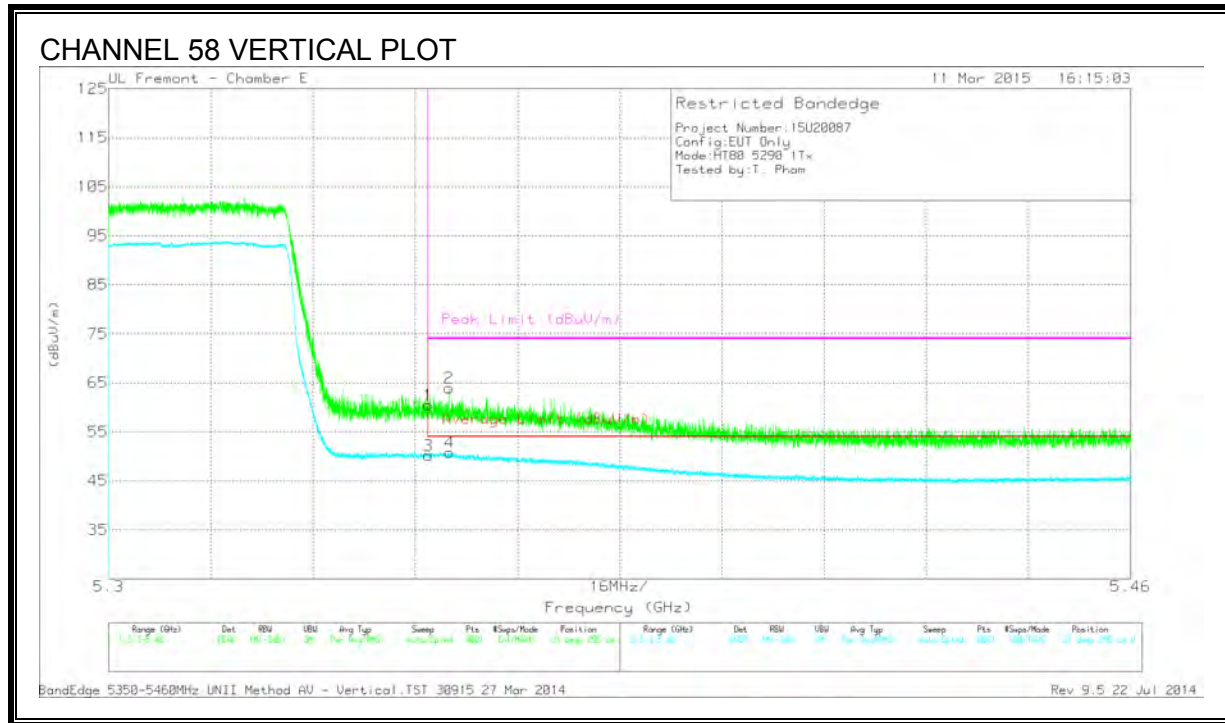

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	47.34	PK	34.5	-21.4	0	60.44	-	-	74	-13.56	21	295	V
2	* 5.353	50.9	PK	34.5	-21.4	0	64	-	-	74	-10	21	295	V
3	* 5.35	37.07	RMS	34.5	-21.4	.16	50.33	54	-3.67	-	-	21	295	V
4	* 5.353	37.68	RMS	34.5	-21.4	.16	50.94	54	-3.06	-	-	21	295	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

RMS - RMS detection

HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS

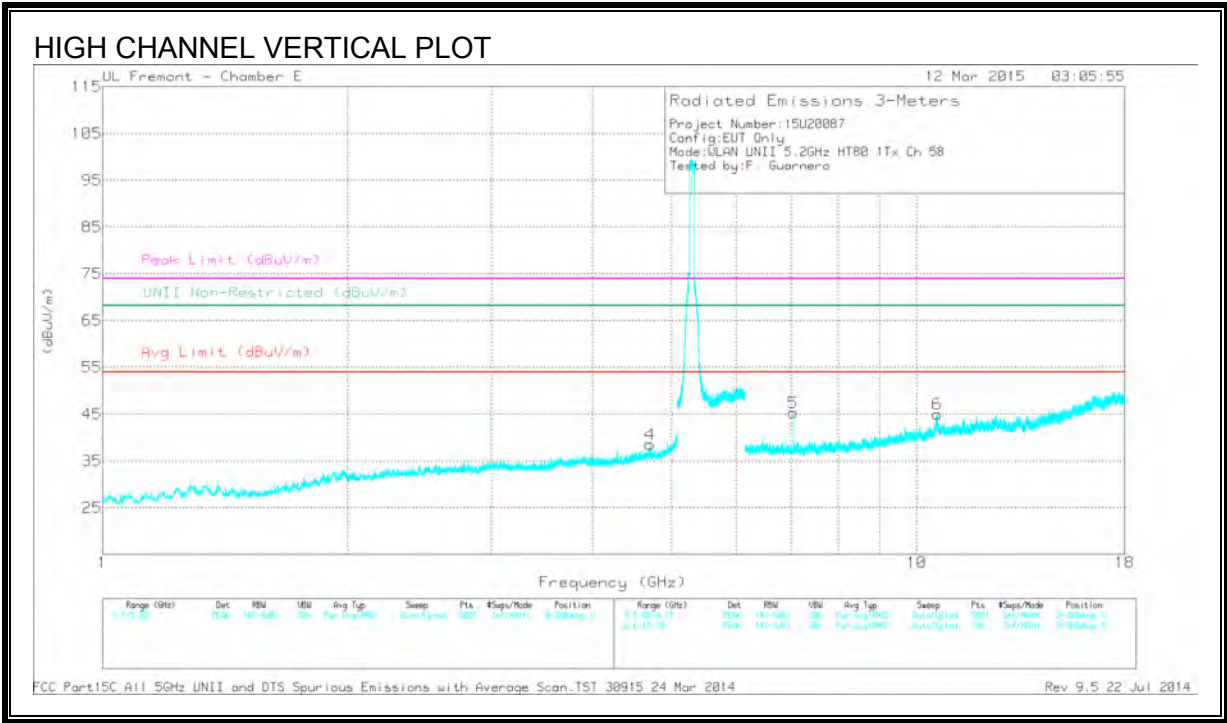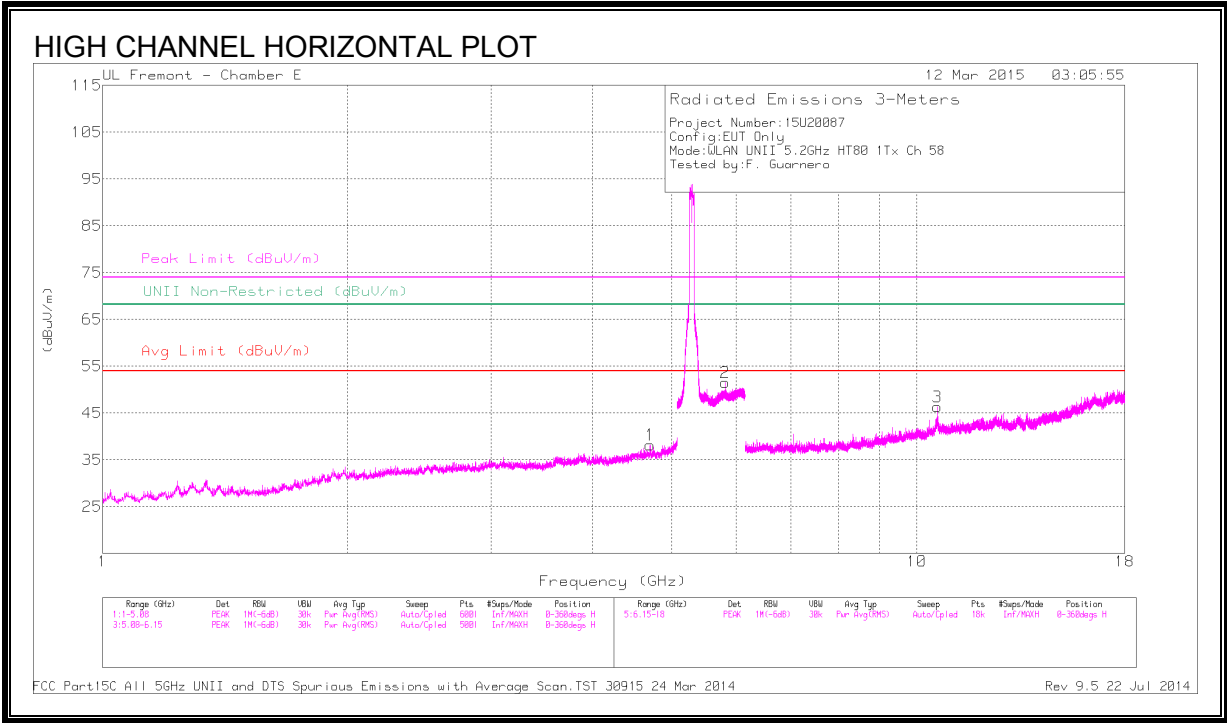

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.702	43.42	PK1	34.2	-30	0	47.62	-	-	74	-26.38	-	-	147	360	H
	* 4.702	34.77	AD 1	34.2	-30	.16	39.14	54	-14.86	-	-	-	-	147	360	H
4	* 4.702	43.77	PK1	34.2	-30	0	47.97	-	-	74	-26.03	-	-	262	321	V
	* 4.702	36.09	AD 1	34.2	-30	.16	40.46	54	-13.54	-	-	-	-	262	321	V
3	* 10.601	41.18	PK1	37.7	-24.9	0	53.98	-	-	74	-20.02	-	-	261	118	H
	* 10.601	29.3	AD 1	37.7	-24.9	.16	42.27	54	-11.73	-	-	-	-	261	118	H
2	5.817	42.88	PK1	34.9	-20.3	0	57.48	-	-	-	-	68.2	-10.72	4	201	H
5	7.054	43.6	PK1	35.6	-28.3	0	50.9	-	-	-	-	68.2	-17.3	247	118	V
6	10.589	40.2	PK1	37.7	-24.6	0	53.3	-	-	-	-	68.2	-14.9	296	191	V


* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

9.13. 802.11ac VHT80 2TX CDD MODE IN THE 5.3 GHz BAND

RESTRICTED BANDEDGE (HIGH CHANNEL, CH 58)

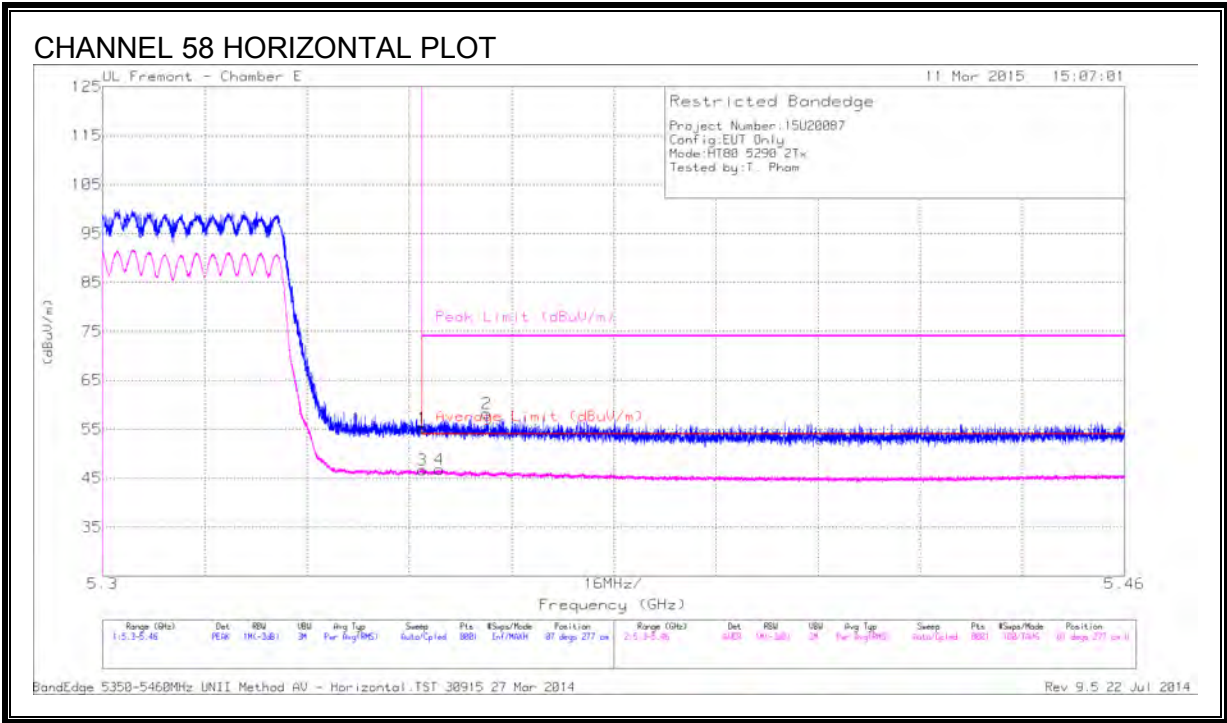

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	42.2	PK	34.5	-21.4	0	55.3	-	-	74	-18.7	87	277	H
2	* 5.36	45.1	PK	34.5	-21.4	0	58.2	-	-	74	-15.8	87	277	H
3	* 5.35	33.64	RMS	34.5	-21.4	.22	46.96	54	-7.04	-	-	87	277	H
4	* 5.353	33.75	RMS	34.5	-21.4	.22	47.07	54	-6.93	-	-	87	277	H



* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.
PK - Peak detector
RMS - RMS detection



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	45.52	PK	34.5	-21.4	0	58.62	-	-	74	-15.38	35	334	V
2	* 5.351	49.56	PK	34.5	-21.4	0	62.66	-	-	74	-11.34	35	334	V
3	* 5.35	37.07	RMS	34.5	-21.4	.22	50.39	54	-3.61	-	-	35	334	V
4	* 5.353	37.59	RMS	34.5	-21.4	.22	50.91	54	-3.09	-	-	35	334	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.
PK - Peak detector
RMS - RMS detection

HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS

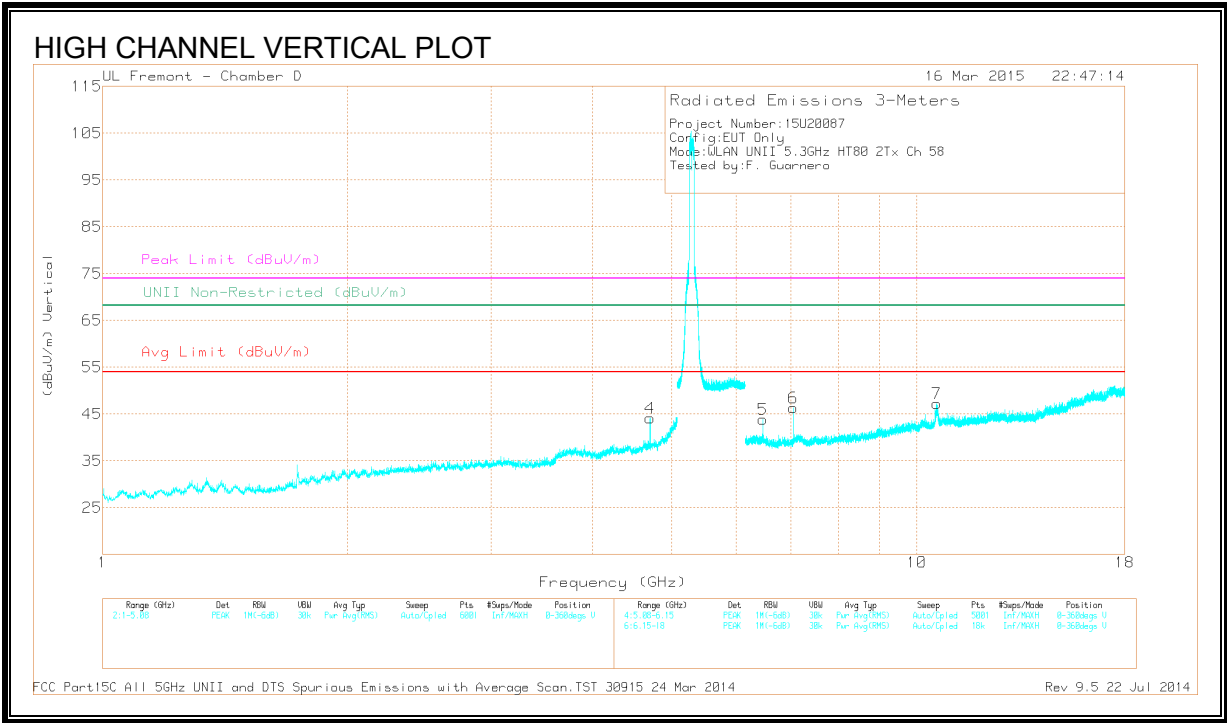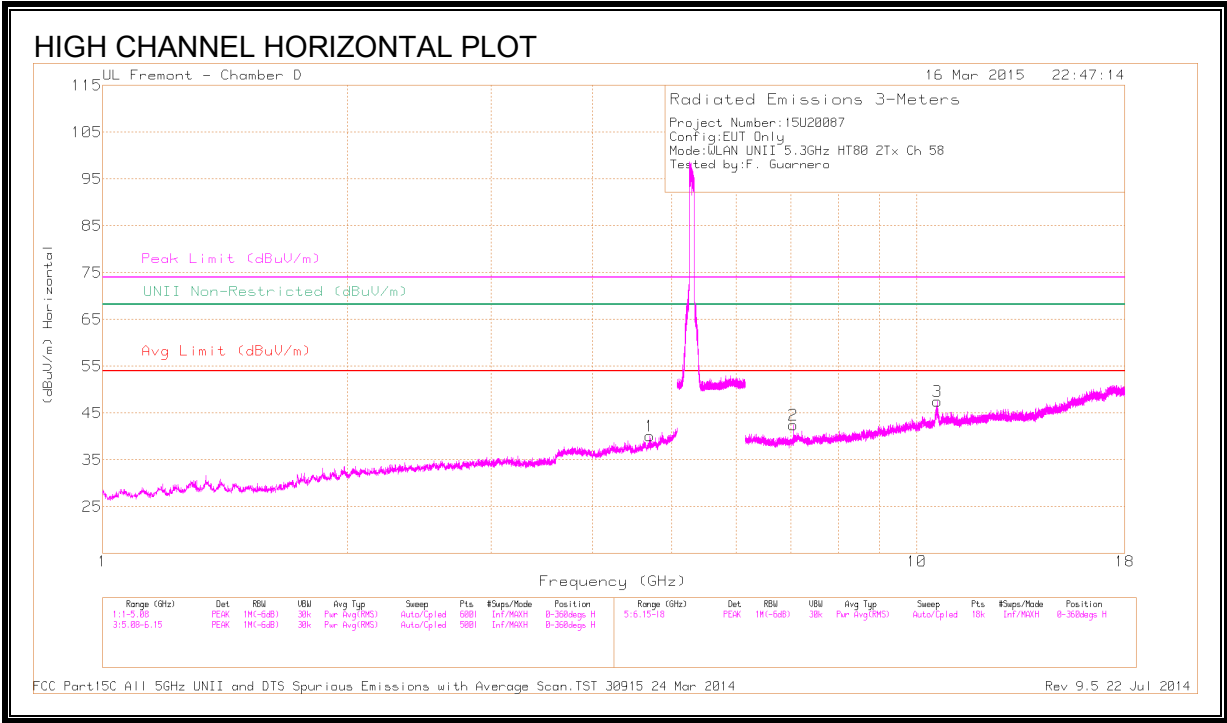

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.702	40.05	PK1	34.2	-28.3	0	45.95	-	-	74	-28.05	-	-	302	284	H
	* 4.702	31.87	AD 1	34.2	-28.3	.22	37.98	54	-16.02	-	-	-	-	302	284	H
4	* 4.702	44.15	PK1	34.2	-28.3	0	50.05	-	-	74	-23.95	-	-	301	157	V
	* 4.702	36.14	AD 1	34.2	-28.3	.22	42.25	54	-11.75	-	-	-	-	301	157	V
3	* 10.6	37.68	PK1	37.7	-21.5	0	53.88	-	-	74	-20.12	-	-	329	190	H
	* 10.6	26.37	AD 1	37.7	-21.5	.22	42.78	54	-11.22	-	-	-	-	329	190	H
5	6.466	40.6	PK1	35.5	-25.9	0	50.2	-	-	-	-	68.2	-18	306	152	V
2	7.053	39.64	PK1	35.5	-26.1	0	49.04	-	-	-	-	68.2	-19.16	295	210	H
6	7.053	42.54	PK1	35.5	-26.1	0	51.94	-	-	-	-	68.2	-16.26	290	127	V
7	10.576	39.14	PK1	37.7	-21.4	0	55.44	-	-	-	-	68.2	-12.76	13	200	V


* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

9.14. 802.11n HT20 SISO MODE IN THE 5.6 GHz BAND

RESTRICTED BANDEGE (LOW CHANNEL)

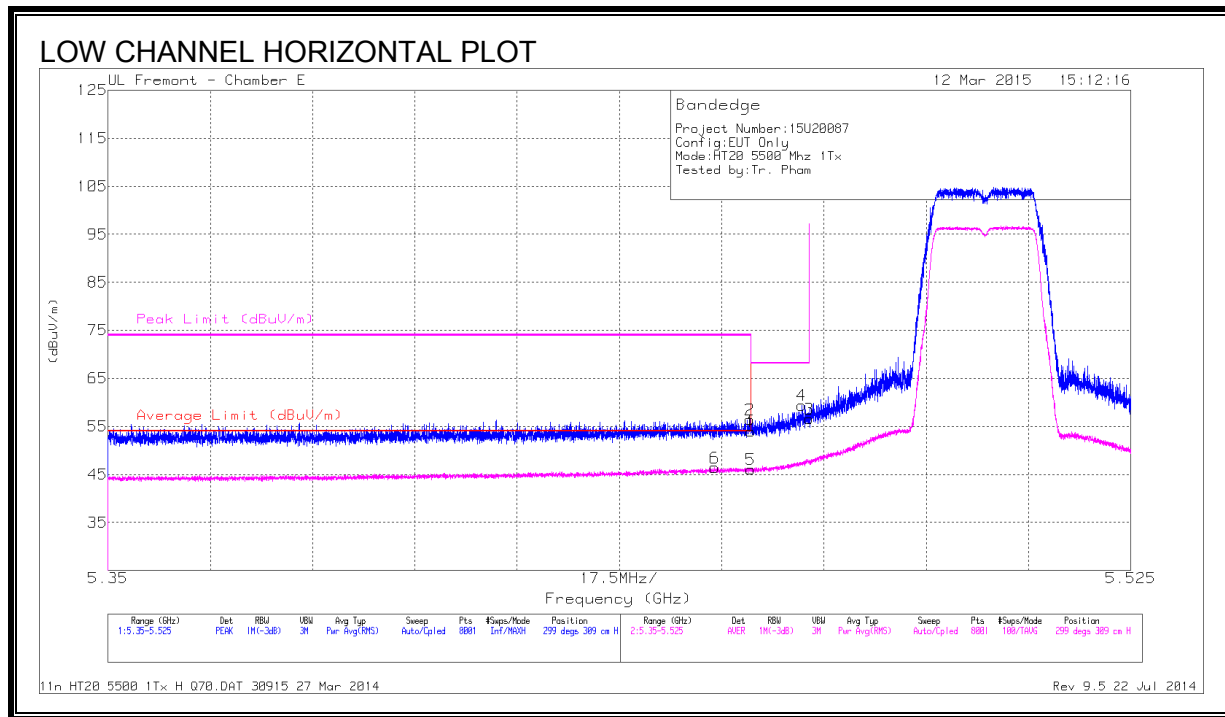


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 5.454	32.63	RMS	34.6	-20.8	46.43	54	-7.57	-	-	299	309	H
1	* 5.46	40.12	PK	34.6	-20.8	53.92	-	-	74	-20.08	299	309	H
2	* 5.46	42.63	PK	34.6	-20.8	56.43	-	-	74	-17.57	299	309	H
5	* 5.46	32.23	RMS	34.6	-20.8	46.03	54	-7.97	-	-	299	309	H
4	5.469	45.56	PK	34.6	-20.8	59.36	-	-	68.2	-8.84	299	309	H
3	5.47	42.8	PK	34.6	-20.8	56.6	-	-	68.2	-11.6	299	309	H

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

RMS - RMS detection

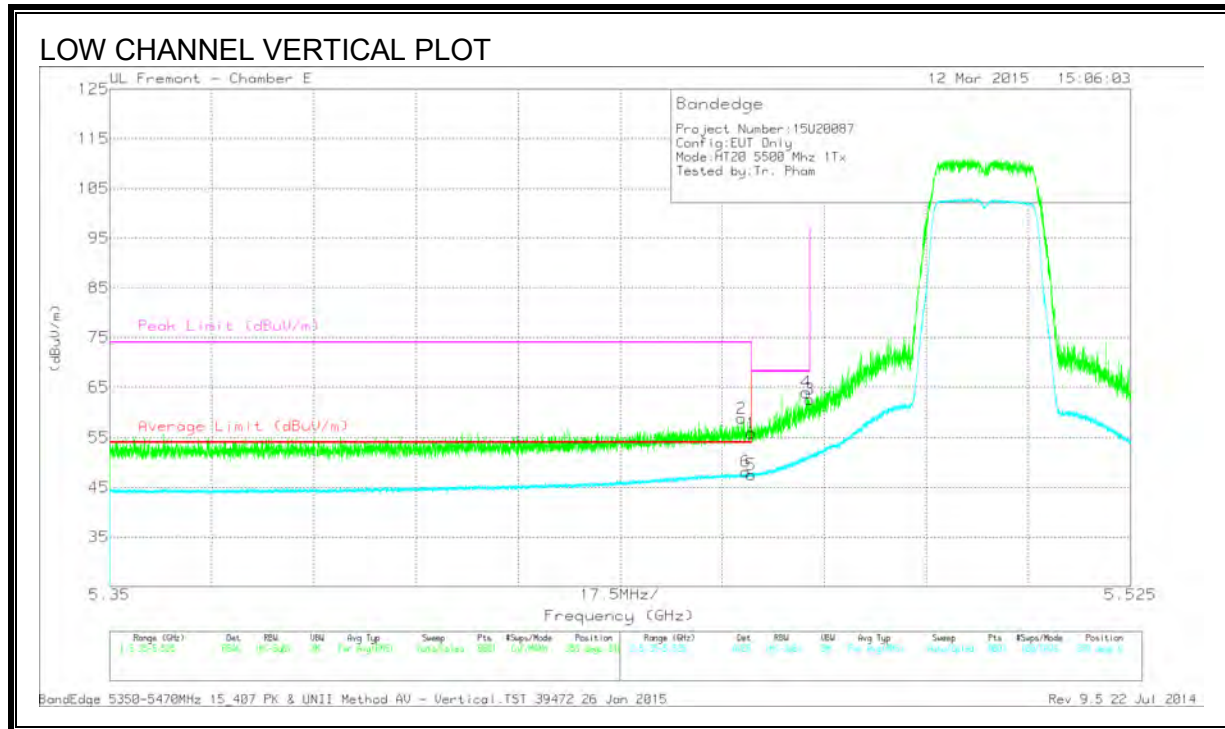


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.458	45.07	PK	34.6	-20.8	58.87	-	-	74	-15.13	359	340	V
6	* 5.459	34.38	RMS	34.6	-20.8	48.18	54	-5.82	-	-	359	340	V
1	* 5.46	42.1	PK	34.6	-20.8	55.9	-	-	74	-18.1	359	340	V
5	* 5.46	33.74	RMS	34.6	-20.8	47.54	54	-6.46	-	-	359	340	V
4	5.469	50.24	PK	34.6	-20.8	64.04	-	-	68.2	-4.16	359	340	V
3	5.47	48.87	PK	34.6	-20.8	62.67	-	-	68.2	-5.53	359	340	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.
PK - Peak detector
RMS - RMS detection


RESTRICTED BANDEDGE (HIGH CHANNEL)

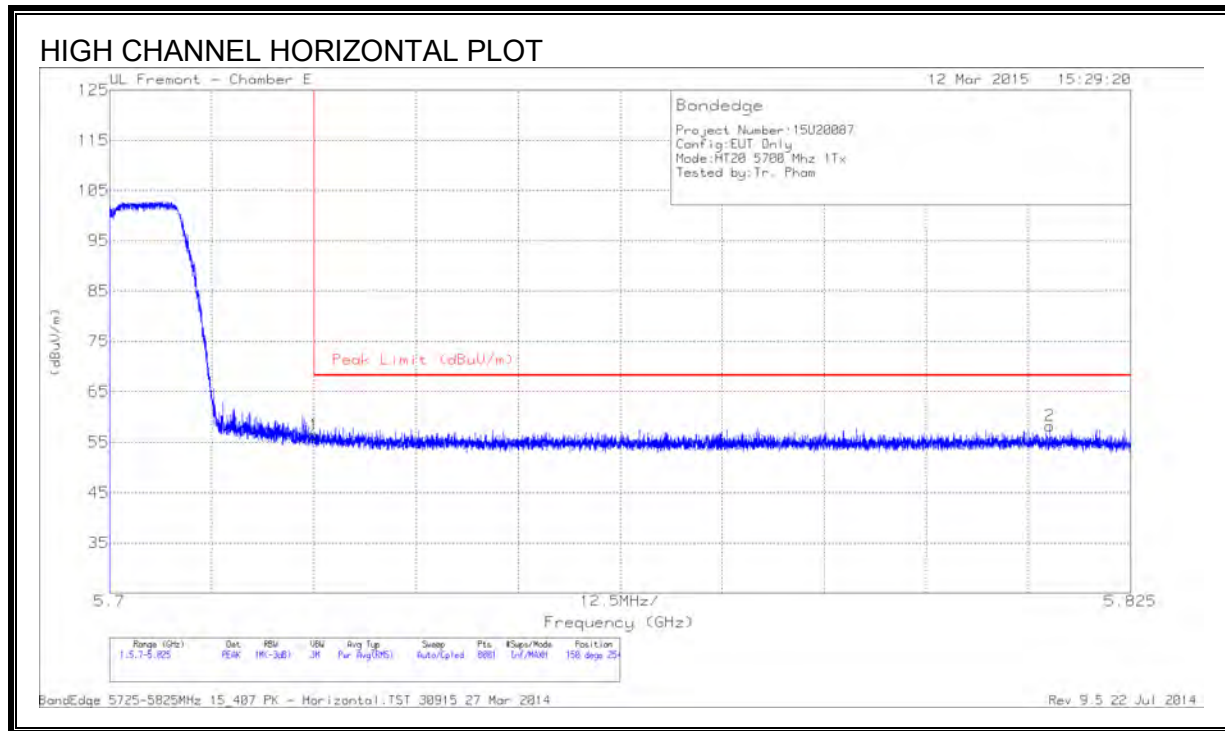

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.6	PK	34.7	-20.8	56.5	68.2	-11.7	150	254	H
2	5.815	43.62	PK	34.9	-20.2	58.32	68.2	-9.88	150	254	H

PK - Peak detector


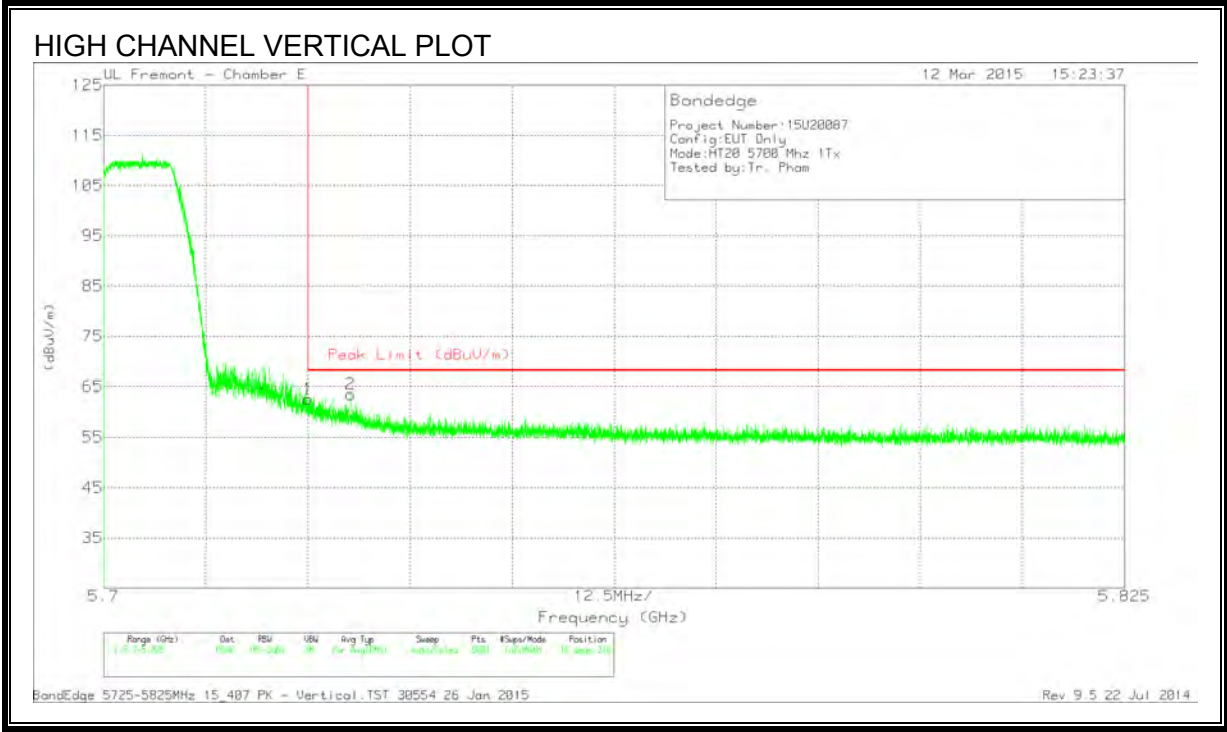


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filt r/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	48.71	PK	34.7	-20.8	62.61	68.2	-5.59	18	310	V
2	5.73	49.54	PK	34.7	-20.7	63.54	68.2	-4.66	18	310	V

PK - Peak detector

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

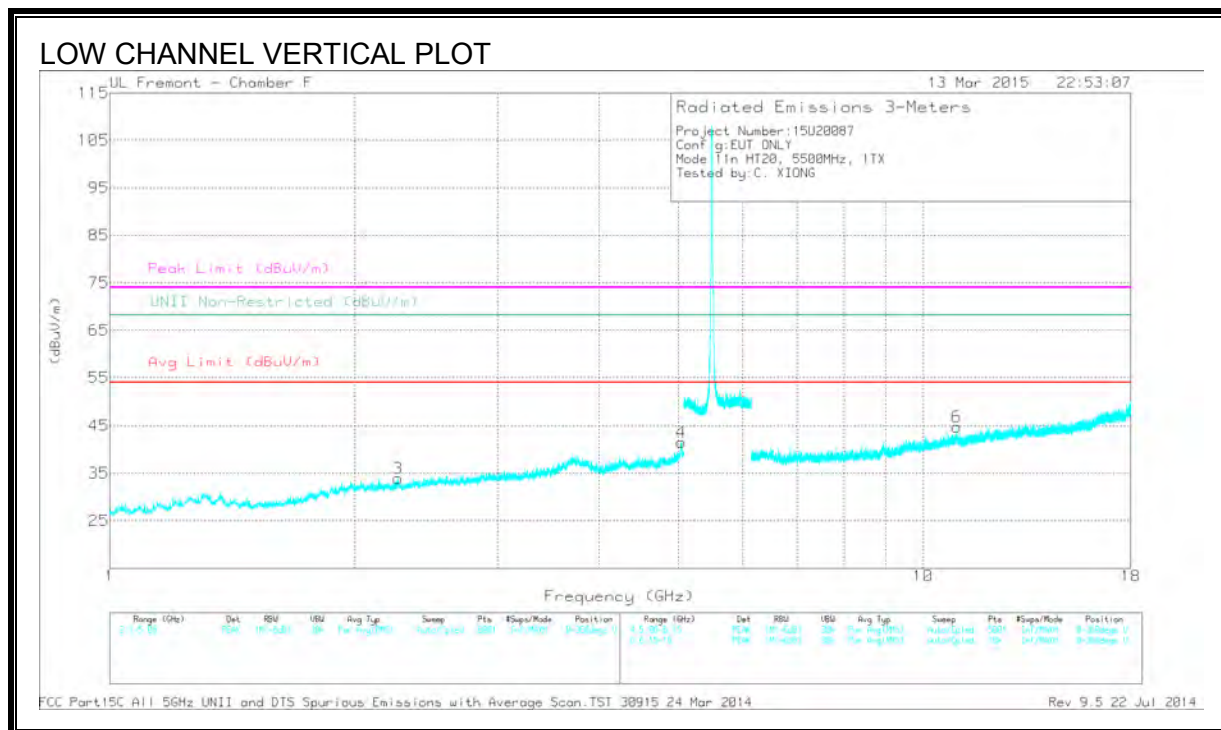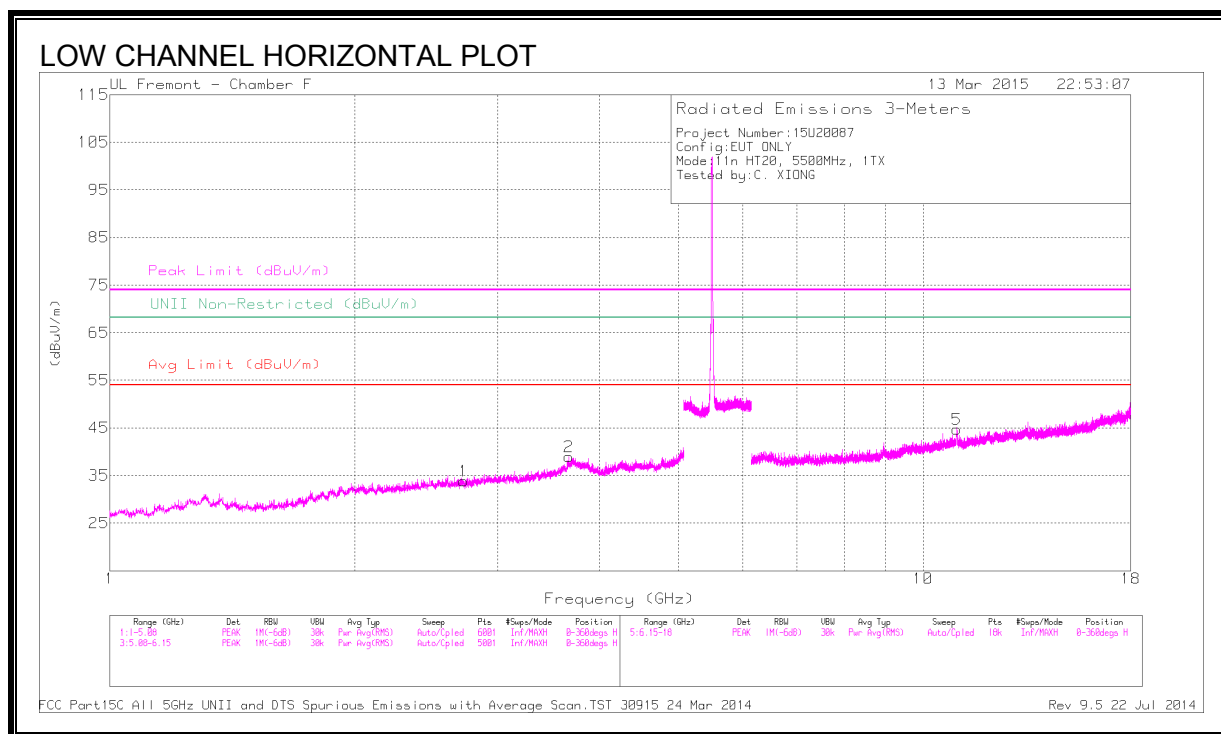

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.725	39.87	PK1	32.8	-30.4	42.27	-	-	74	-31.73	-	-	13	168	H
	* 2.723	28.59	AD1	32.8	-30.4	30.99	54	-23.01	-	-	-	-	13	168	H
2	* 3.667	39.44	PK1	34.9	-28.7	45.64	-	-	74	-28.36	-	-	42	303	H
	* 3.667	28.85	AD1	34.9	-28.7	35.05	54	-18.95	-	-	-	-	42	303	H
3	* 2.263	40.26	PK1	31.8	-30.6	41.46	-	-	74	-32.54	-	-	49	279	V
	* 2.261	28.83	AD1	31.8	-30.6	30.03	54	-23.97	-	-	-	-	49	279	V
4	* 5.047	38.79	PK1	34.3	-26.5	46.59	-	-	74	-27.41	-	-	108	316	V
	* 5.048	27.82	AD1	34.3	-26.5	35.62	54	-18.38	-	-	-	-	108	316	V
5	* 11.006	37.37	PK1	38.1	-22	53.47	-	-	74	-20.53	-	-	86	322	H
	* 11.006	25.31	AD1	38.1	-22	41.41	54	-12.59	-	-	-	-	86	322	H
6	* 10.998	35.48	PK1	38.1	-21.9	51.68	-	-	74	-22.32	-	-	70	258	V
	* 10.998	24.22	AD1	38.1	-21.9	40.42	54	-13.58	-	-	-	-	70	258	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS

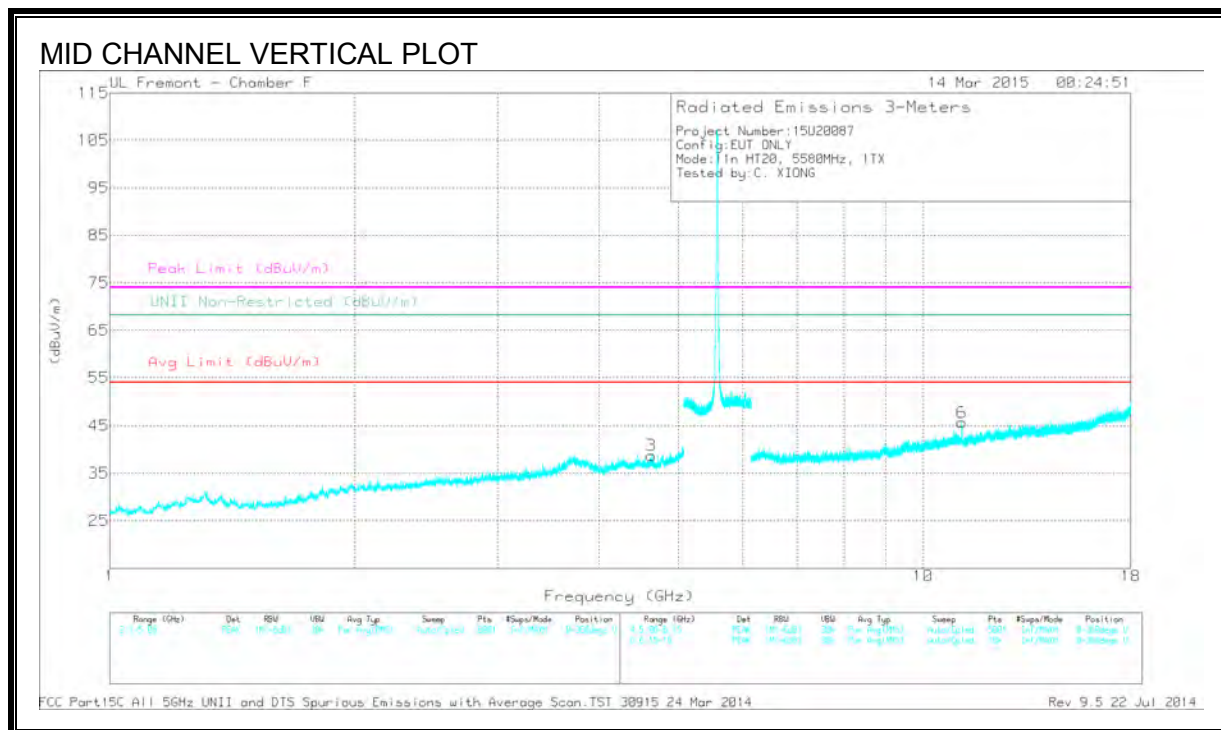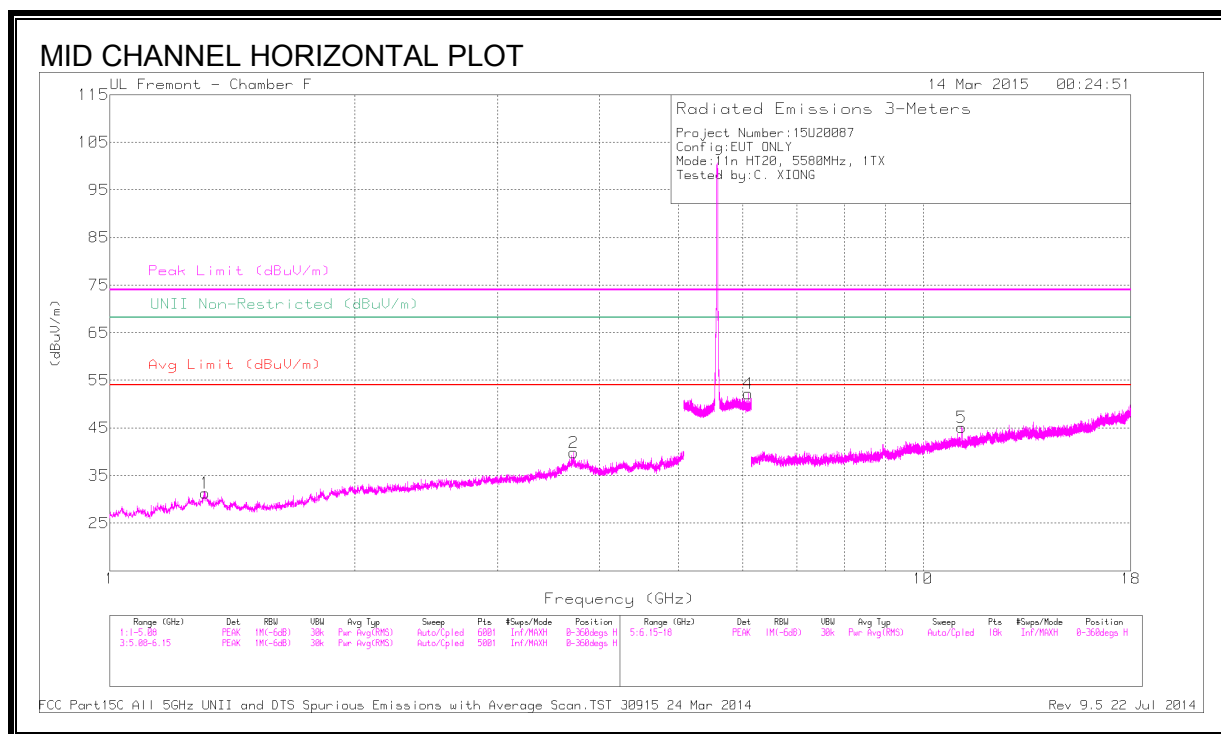

DATA



	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.309	41	PK1	30	-31.5	39.5	-	-	74	-34.5	-	-	47	244	H
	* 1.31	29.58	AD1	30	-31.5	28.08	54	-25.92	-	-	-	-	47	244	H
2	* 3.72	41.26	PK1	34.8	-29	47.06	-	-	74	-26.94	-	-	59	192	H
	* 3.72	31.82	AD1	34.8	-29	37.62	54	-16.38	-	-	-	-	59	192	H
3	* 4.632	37.65	PK1	34.1	-26.6	45.15	-	-	74	-28.85	-	-	65	203	V
	* 4.631	26.38	AD1	34.1	-26.6	33.88	54	-20.12	-	-	-	-	65	203	V
4	6.096	40.84	PK1	35.4	-17.9	58.34	-	-	-	-	68.2	-9.86	49	246	H
5	* 11.161	34.31	PK1	38.1	-22	50.41	-	-	74	-23.59	-	-	123	312	H
	* 11.158	23.87	AD1	38.1	-22	39.97	54	-14.03	-	-	-	-	123	312	H
6	* 11.163	35.48	PK1	38.1	-22.1	51.48	-	-	74	-22.52	-	-	84	343	V
	* 11.161	24.3	AD1	38.1	-22	40.4	54	-13.6	-	-	-	-	84	343	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS

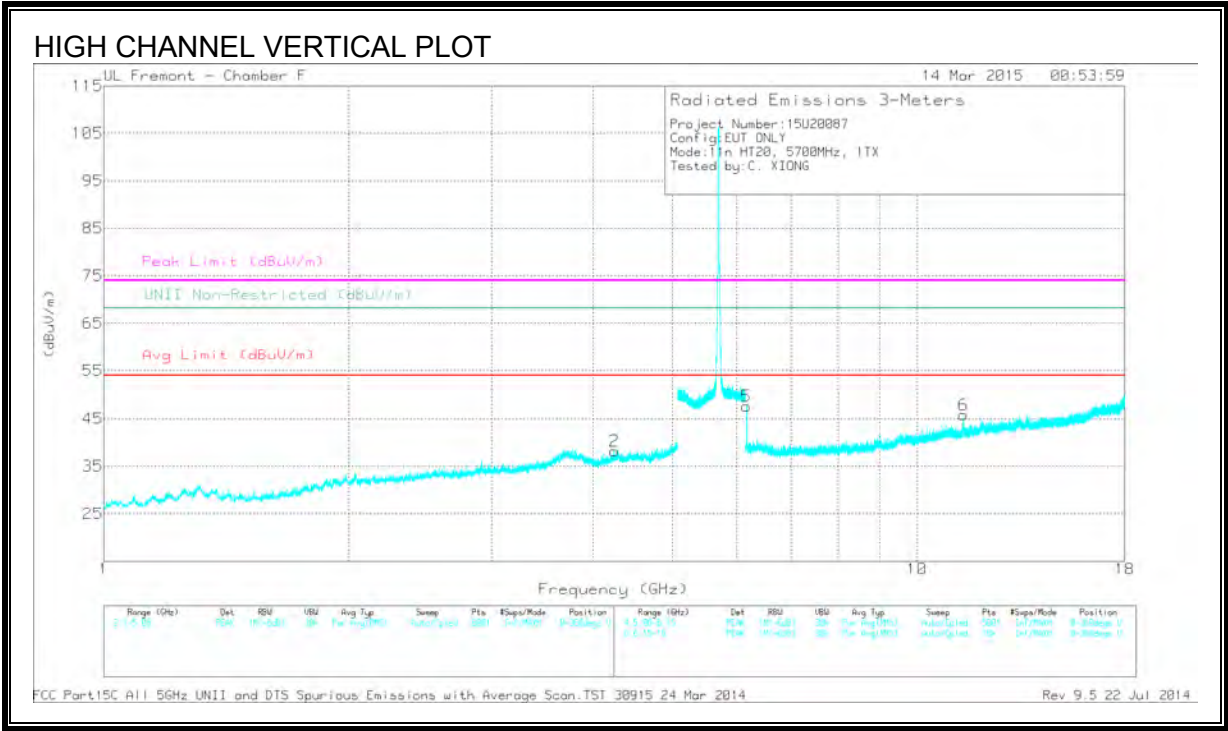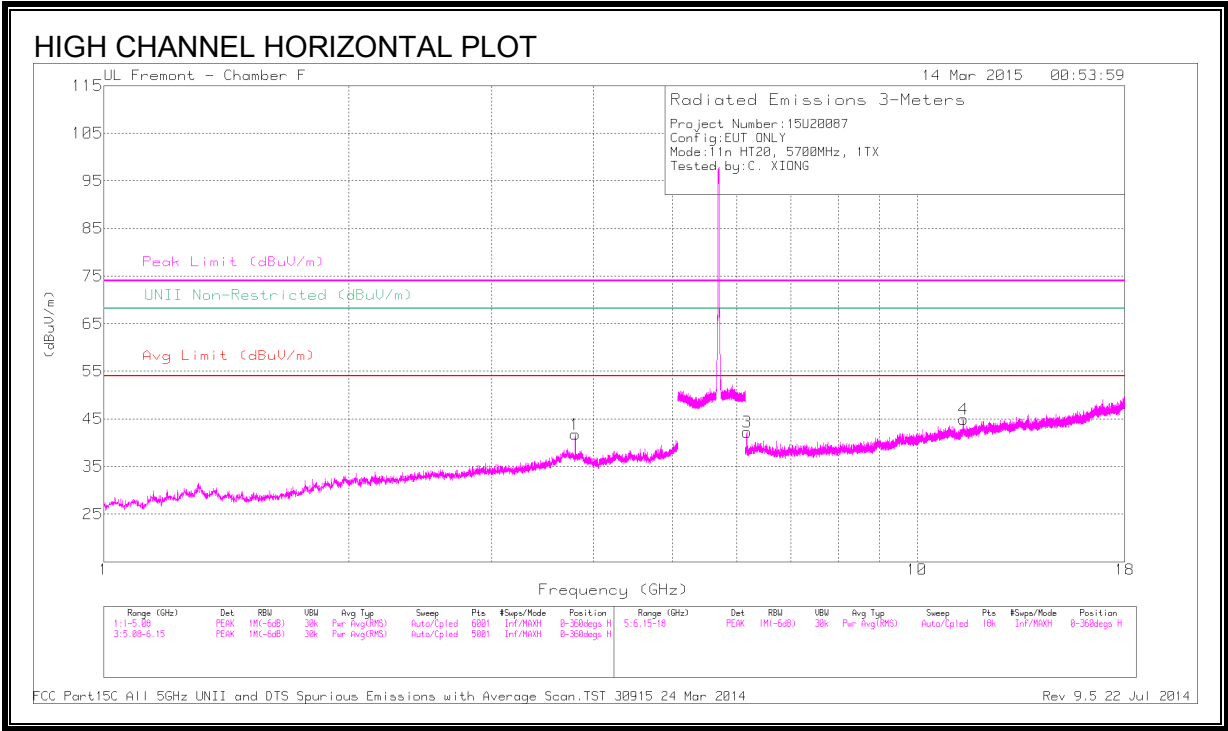

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cb/F1 tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.8	42.23	PK1	34.4	-29.2	47.43	-	-	74	-26.57	-	-	40	245	H
	* 3.8	34.57	AD1	34.4	-29.2	39.77	54	-14.23	-	-	-	-	40	245	H
2	* 4.247	37.02	PK1	33.7	-26.8	43.92	-	-	74	-30.08	-	-	65	282	V
	* 4.243	26.31	AD1	33.7	-26.8	33.21	54	-20.79	-	-	-	-	65	282	V
3	6.182	40.99	PK1	35.5	-26.7	49.79	-	-	-	-	68.2	-18.41	286	158	H
4	* 11.403	38.15	PK1	38.2	-21.4	54.95	-	-	74	-19.05	-	-	77	109	H
	* 11.403	25.48	AD1	38.2	-21.4	42.28	54	-11.72	-	-	-	-	77	109	H
5	6.172	48.03	PK1	35.4	-26.4	57.03	-	-	-	-	68.2	-11.17	315	131	V
6	* 11.4	38.19	PK1	38.2	-21.4	54.99	-	-	74	-19.01	-	-	10	286	V
	* 11.4	25.89	AD1	38.2	-21.4	42.69	54	-11.31	-	-	-	-	10	286	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

CHANNEL 144 HARMONICS AND SPURIOUS EMISSIONS

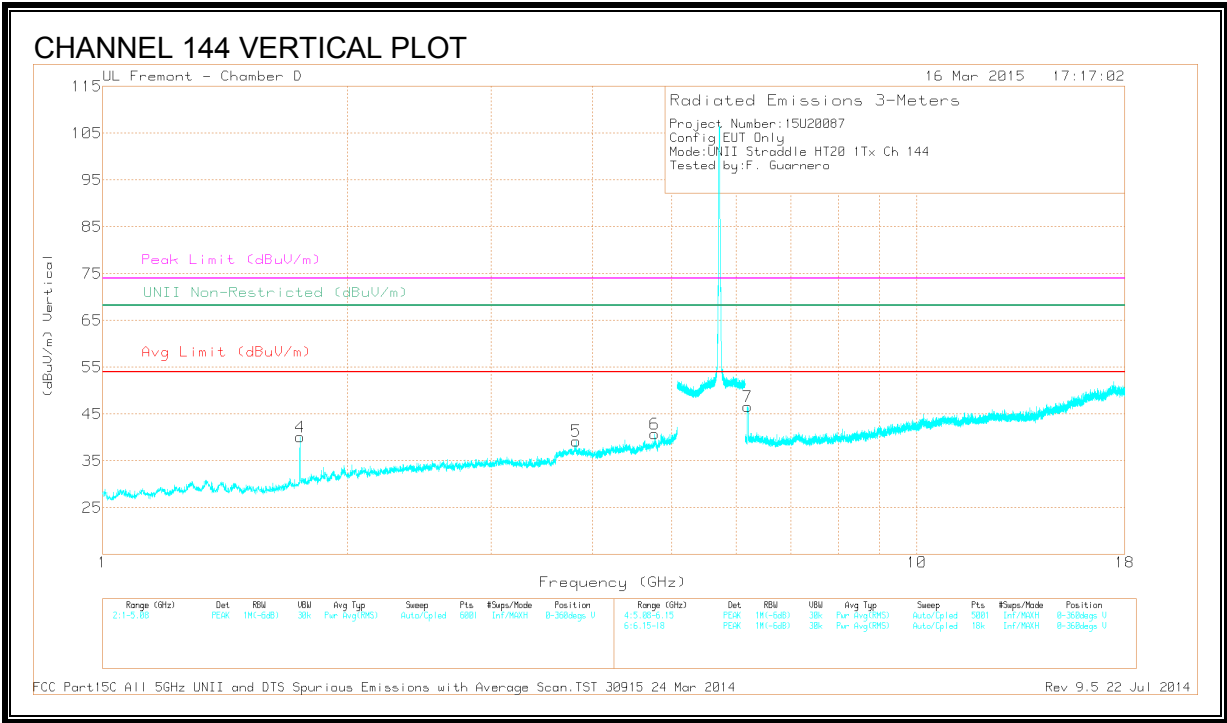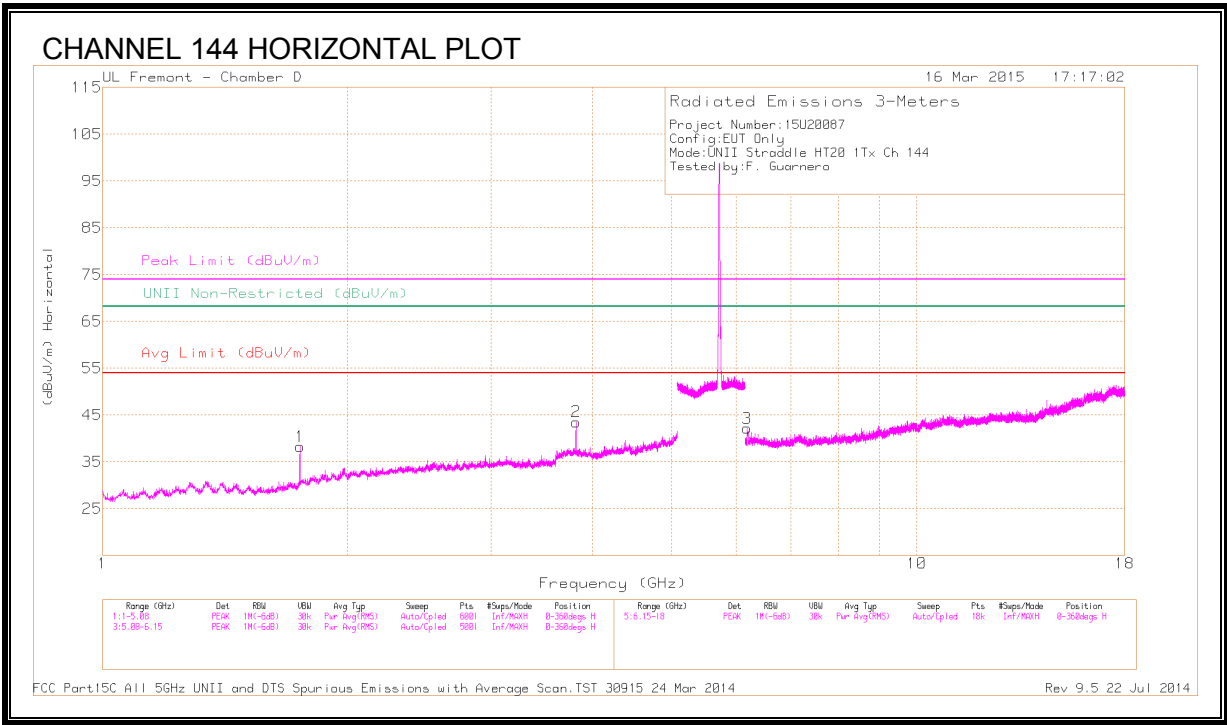

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dBm)	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 3.814	43.29	PK1	33.4	-28.7	47.99	-	-	74	-26.01	-	-	47	280	H
	* 3.813	36.38	AD1	33.4	-28.7	41.08	54	-12.92	-	-	-	-	47	280	H
5	* 3.813	41.19	PK1	33.4	-28.7	45.89	-	-	74	-28.11	-	-	234	200	V
	* 3.813	31.37	AD1	33.4	-28.7	36.07	54	-17.93	-	-	-	-	234	200	V
6	* 4.767	40.71	PK1	34.1	-27.5	47.31	-	-	74	-26.69	-	-	282	285	V
	* 4.767	30.3	AD1	34.1	-27.5	36.9	54	-17.1	-	-	-	-	282	285	V
1	1.747	41.84	PK1	29.4	-31	40.24	-	-	-	-	68.2	-27.96	5	376	H
4	1.748	41.75	PK1	29.4	-31	40.15	-	-	-	-	68.2	-28.05	153	114	V
3	6.19	41.88	PK1	35.5	-26.6	50.78	-	-	-	-	68.2	-17.42	212	322	H
7	6.202	45.85	PK1	35.5	-26.7	54.65	-	-	-	-	68.2	-13.55	294	134	V


* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

9.15. 802.11n HT20 2Tx CDD MODE IN THE 5.6 GHz BAND


RESTRICTED BANDEGE (LOW CHANNEL)

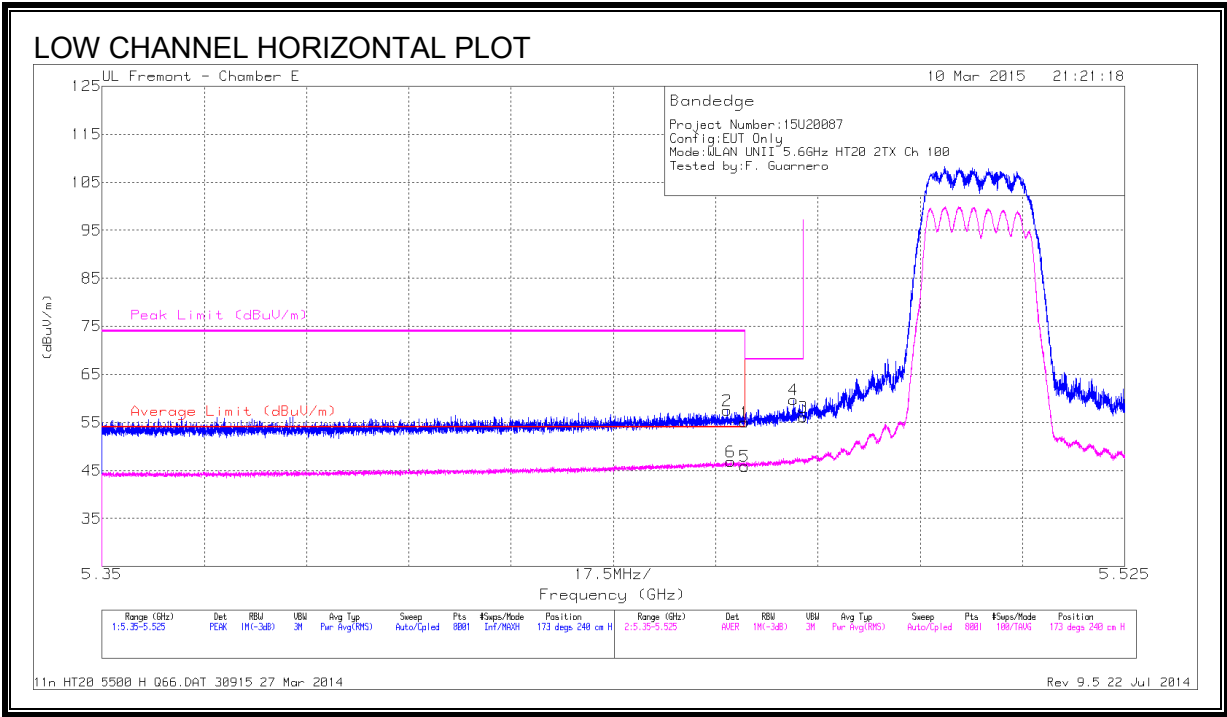

DATA

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	41.24	PK	34.6	-20.8	55.04	-	-	74	-18.96	173	240	H
2	* 5.457	43.7	PK	34.6	-20.8	57.5	-	-	74	-16.5	173	240	H
5	* 5.46	32.05	RMS	34.6	-20.8	45.85	54	-8.15	-	-	173	240	H
6	* 5.458	33.04	RMS	34.6	-20.8	46.84	54	-7.16	-	-	173	240	H
4	5.468	45.89	PK	34.6	-20.8	59.69	-	-	68.2	-8.51	173	240	H
3	5.47	42.34	PK	34.6	-20.8	56.14	-	-	68.2	-12.06	173	240	H

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.
PK - Peak detector
RMS - RMS detection

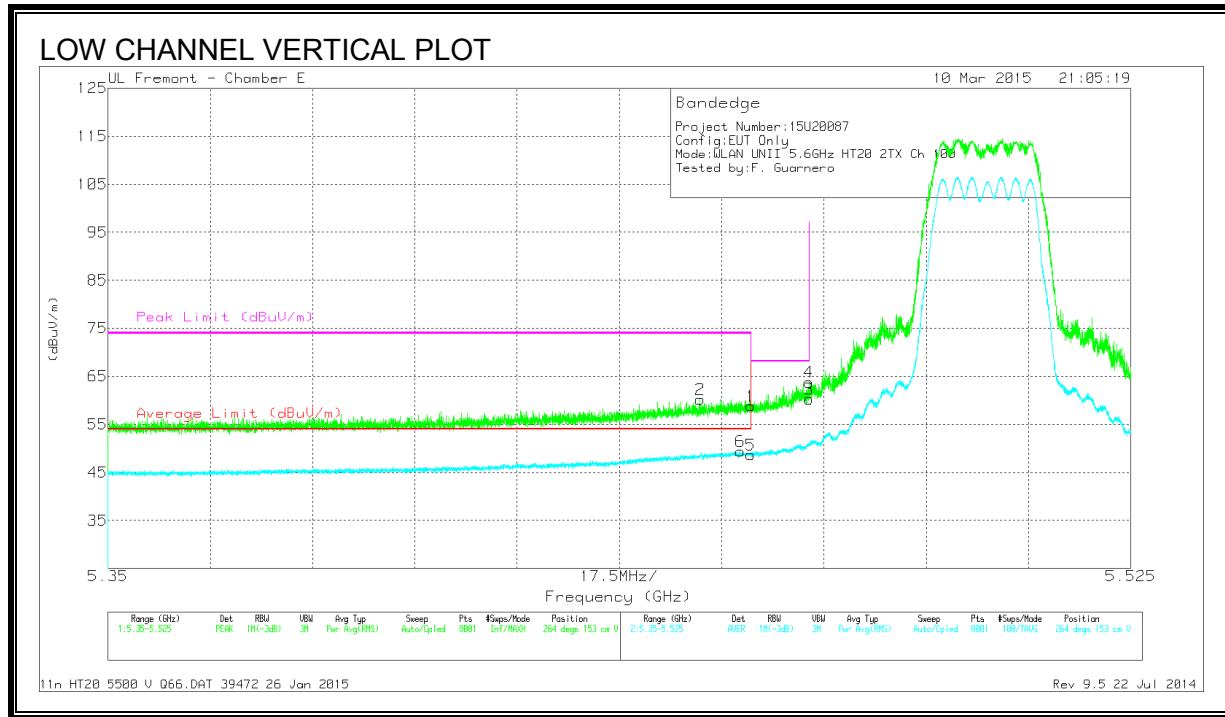

DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	45.08	PK	34.6	-20.8	58.88	-	-	74	-15.12	264	153	V
2	* 5.451	46.54	PK	34.6	-20.9	60.24	-	-	74	-13.76	264	153	V
5	* 5.46	34.87	RMS	34.6	-20.8	48.67	54	-5.33	-	-	264	153	V
6	* 5.458	35.6	RMS	34.6	-20.8	49.4	54	-4.6	-	-	264	153	V
3	5.47	46.49	PK	34.6	-20.8	60.29	-	-	68.2	-7.91	264	153	V
4	5.47	49.98	PK	34.6	-20.8	63.78	-	-	68.2	-4.42	264	153	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

RMS - RMS detection


RESTRICTED BANDEDGE (HIGH CHANNEL)

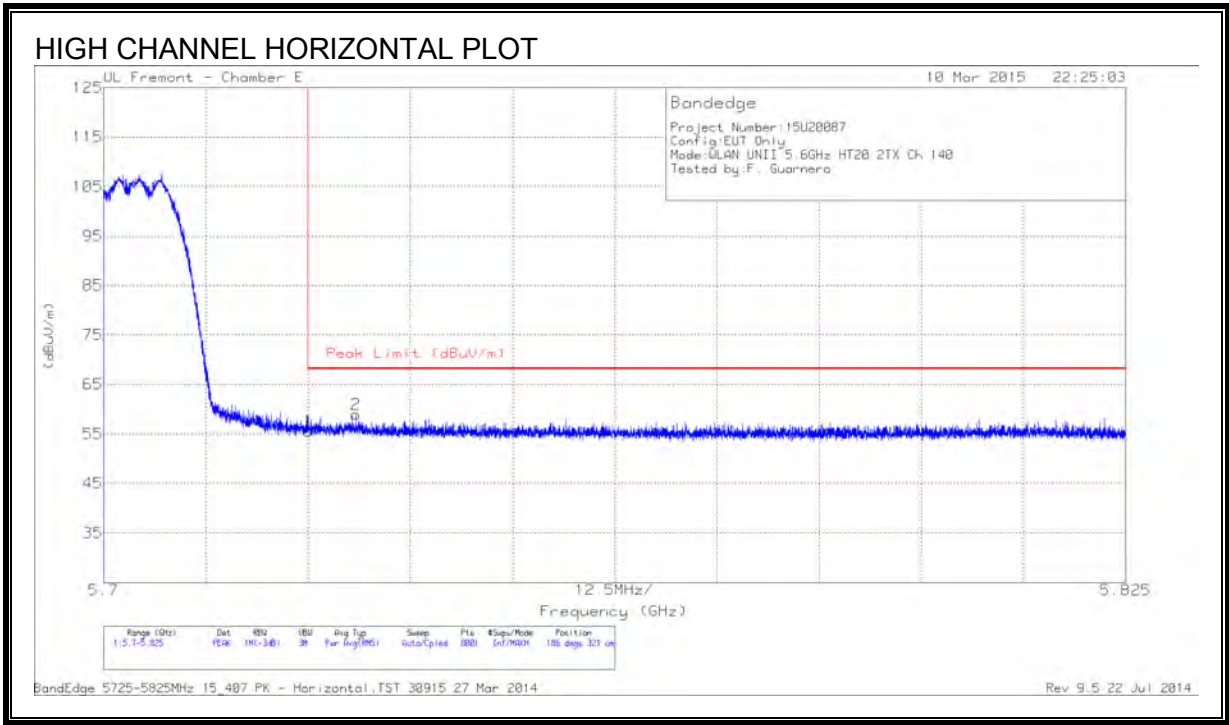

DATA

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Correcte d Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	41.63	PK	34.7	-20.8	55.53	68.2	-12.67	186	321	H
2	5.731	44.95	PK	34.7	-20.7	58.95	68.2	-9.25	186	321	H

PK - Peak detector


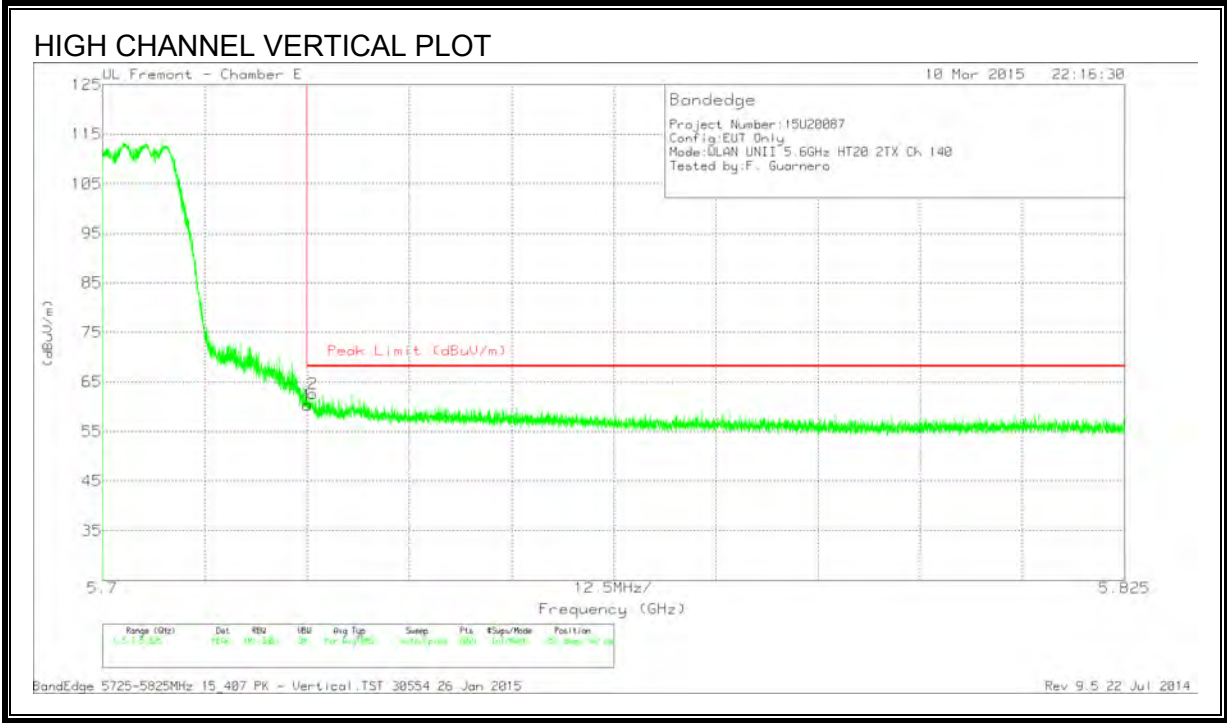


DATA

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Correcte d Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	46.38	PK	34.7	-20.8	60.28	68.2	-7.92	251	142	V
2	5.726	48.75	PK	34.7	-20.8	62.65	68.2	-5.55	251	142	V

PK - Peak detector

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

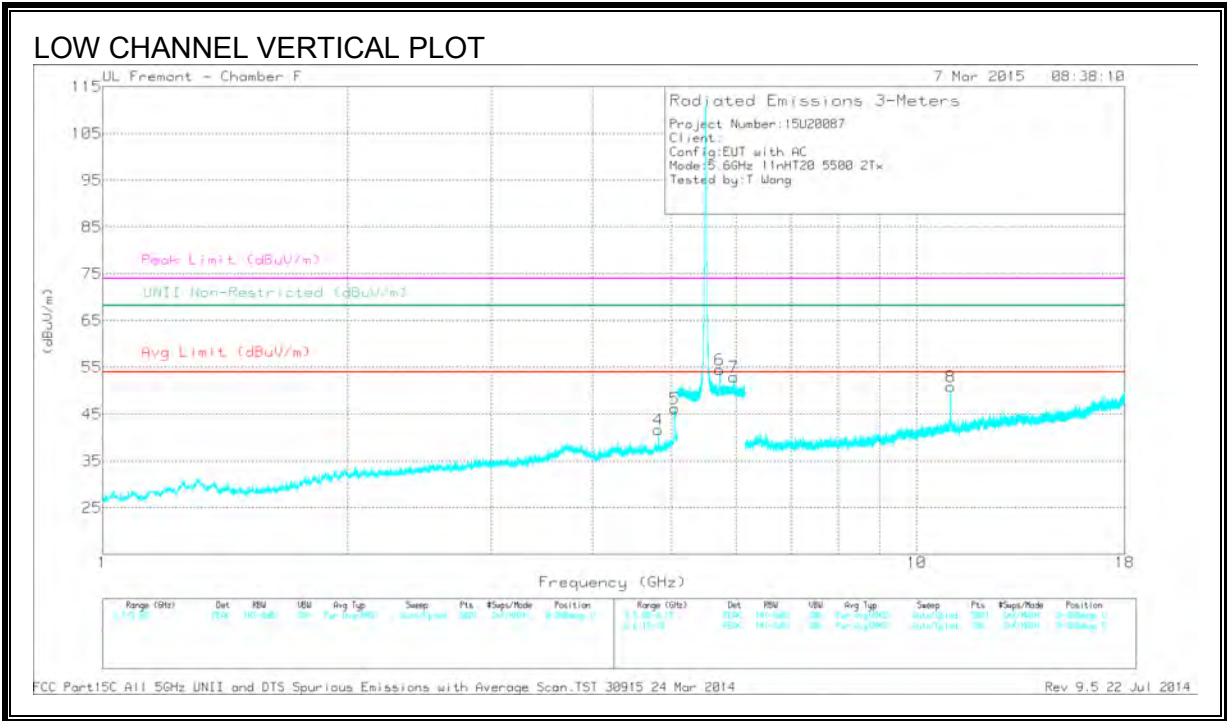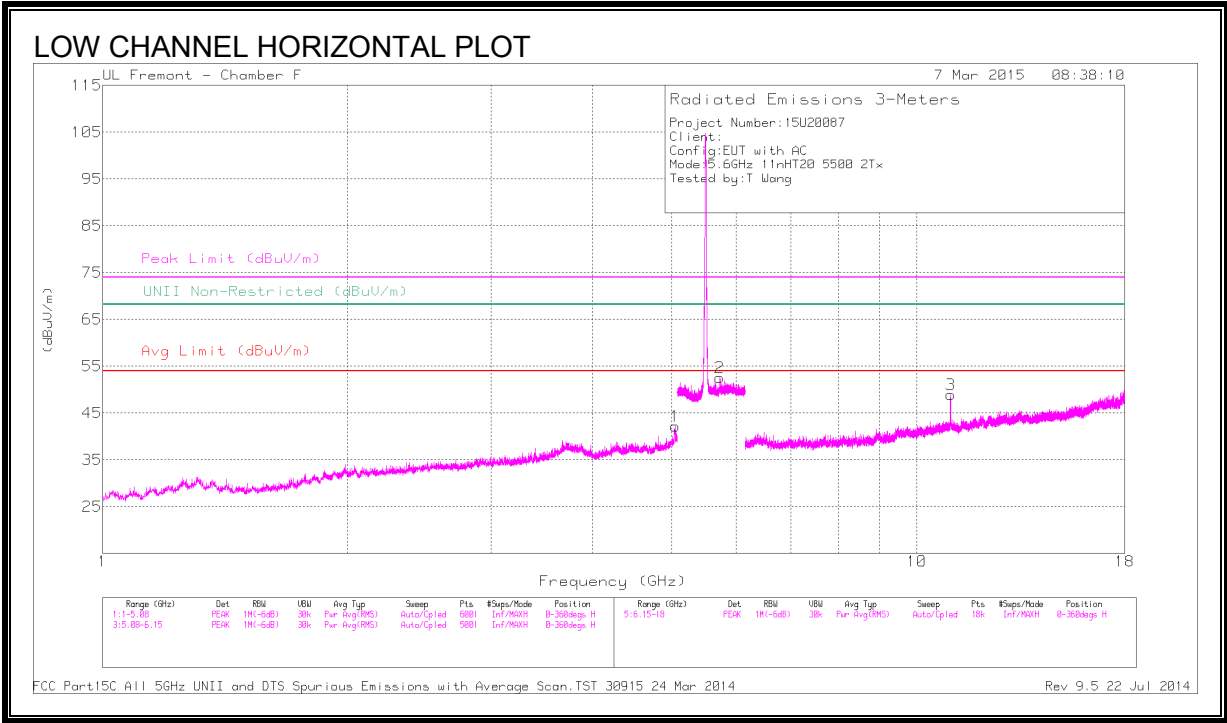

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/F Itr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.049	42.75	PK1	34.3	-26.5	50.55	-	-	74	-23.45	-	-	341	336	H
	* 5.049	32.89	AD1	34.3	-26.5	40.69	54	-13.31	-	-	-	-	341	336	H
4	* 4.813	41.26	PK1	34.1	-27.8	47.56	-	-	74	-26.44	-	-	72	334	V
	* 4.813	33.08	AD1	34.1	-27.8	39.38	54	-14.62	-	-	-	-	72	334	V
5	* 5.039	45.6	PK1	34.3	-26.5	53.4	-	-	74	-20.6	-	-	72	334	V
	* 5.039	36.05	AD1	34.3	-26.5	43.85	54	-10.15	-	-	-	-	72	334	V
2	5.725	42.15	PK1	34.8	-18.1	58.85	-	-	-	-	68.2	-9.35	341	336	H
6	5.723	43.08	PK1	34.8	-18.1	59.78	-	-	-	-	68.2	-8.42	72	334	V
7	5.962	42.12	PK1	35.2	-18.1	59.22	-	-	-	-	68.2	-8.98	72	334	V
3	* 10.995	42.94	PK1	38.1	-21.9	59.14	-	-	74	-14.86	-	-	31	366	H
	* 10.996	30.29	AD1	38.1	-21.9	46.49	54	-7.51	-	-	-	-	31	366	H
8	* 11.003	43.98	PK1	38.1	-22	60.08	-	-	74	-13.92	-	-	87	194	V
	* 11.002	31.24	AD1	38.1	-22	47.34	54	-6.66	-	-	-	-	87	194	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS

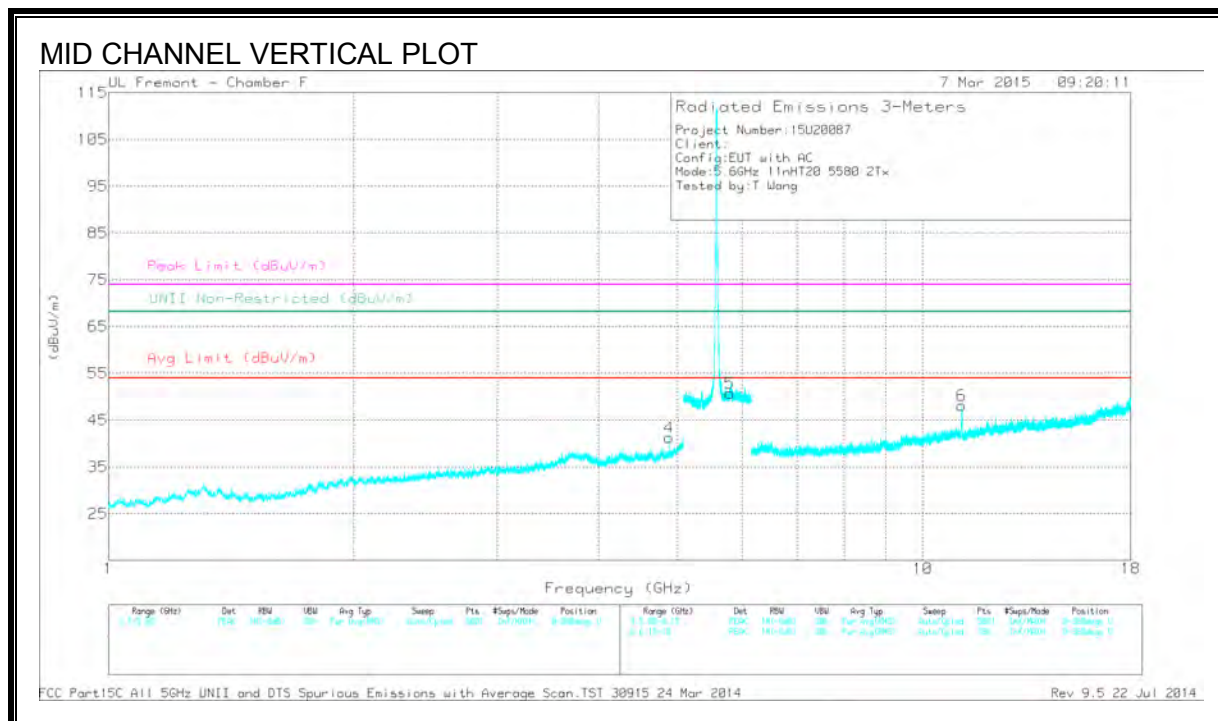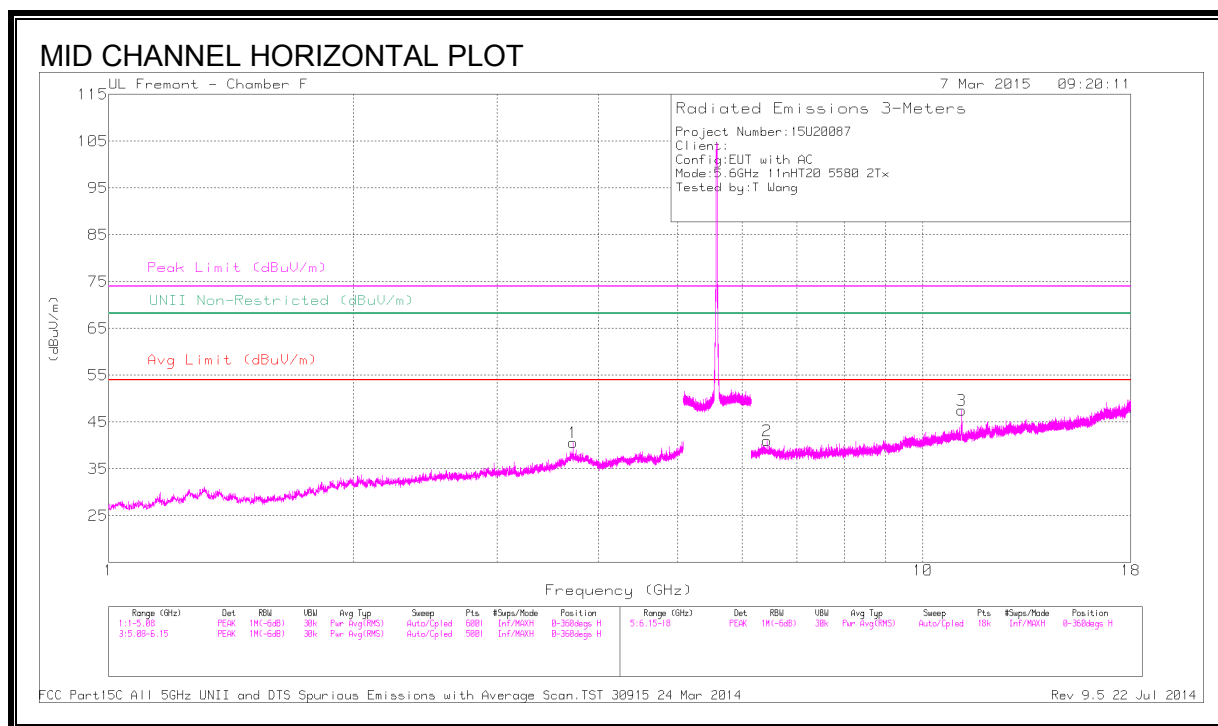

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/F ttr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.72	40.45	PK1	34.8	-29	46.25	-	-	74	-27.75	-	-	147	175	H
	* 3.72	31.47	AD1	34.8	-29	37.27	54	-16.73	-	-	-	-	147	175	H
4	* 4.883	39.69	PK1	34.2	-27.3	46.59	-	-	74	-27.41	-	-	48	257	V
	* 4.882	31.69	AD1	34.2	-27.3	38.59	54	-15.41	-	-	-	-	48	257	V
5	5.796	41.8	PK1	34.9	-18.1	58.6	-	-	-	-	68.2	-9.6	48	257	V
2	6.437	37.69	PK1	35.6	-26.8	46.49	-	-	-	-	68.2	-21.71	147	175	H
3	* 11.16	41.19	PK1	38.1	-22	57.29	-	-	74	-16.71	-	-	57	132	H
	* 11.161	30.22	AD1	38.1	-22	46.32	54	-7.68	-	-	-	-	57	132	H
6	* 11.158	44	PK1	38.1	-22	60.1	-	-	74	-13.9	-	-	109	117	V
	* 11.158	29.49	AD1	38.1	-22	45.59	54	-8.41	-	-	-	-	109	117	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS

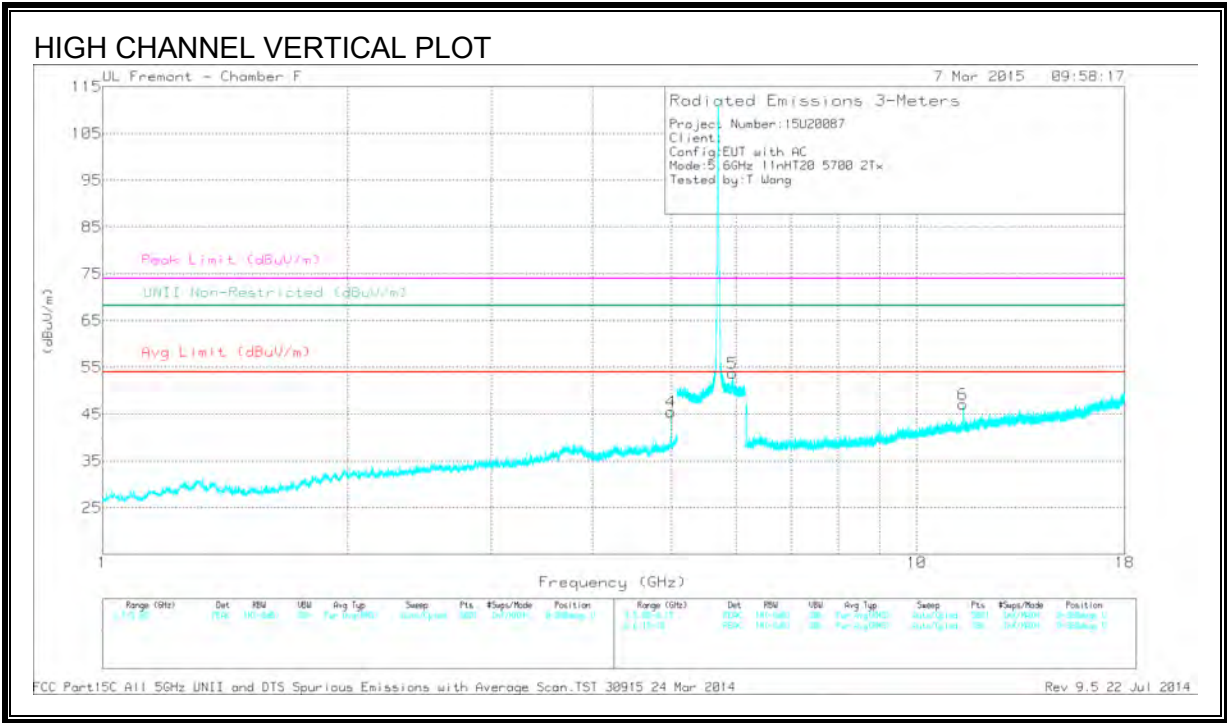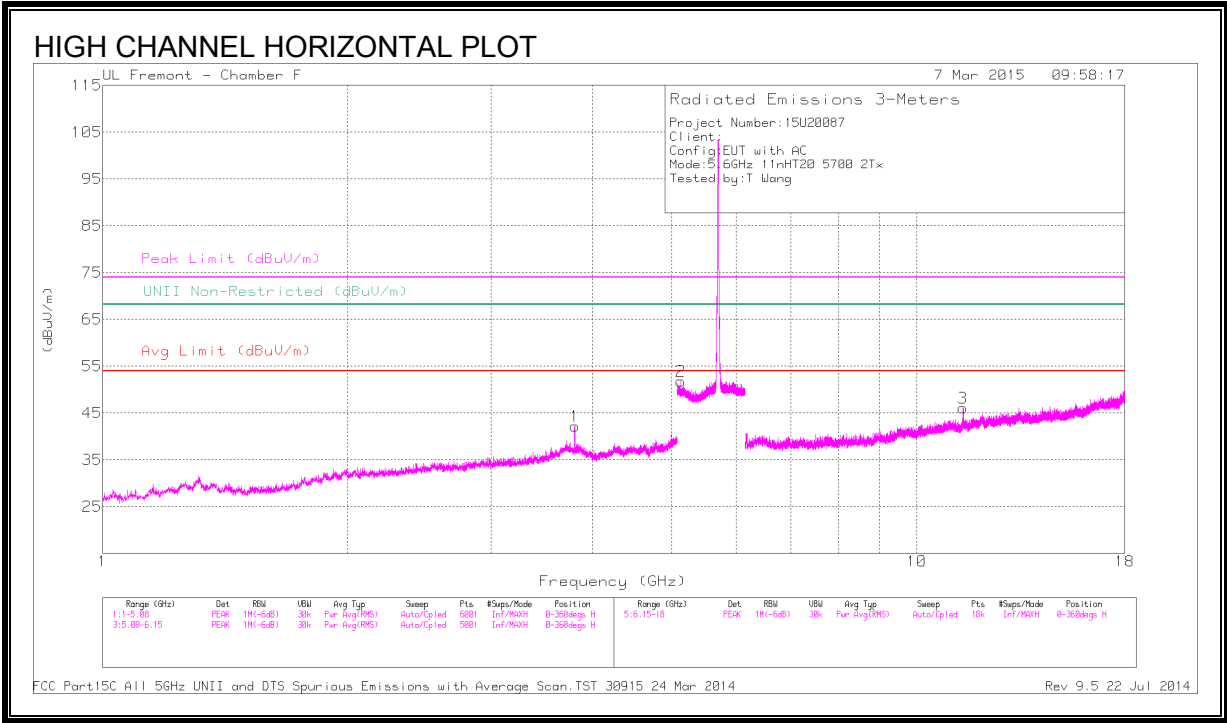

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/F Itr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.8	42.2	PK1	34.4	-29.2	47.4	-	-	74	-26.6	-	-	157	246	H
	* 3.8	35.74	AD1	34.4	-29.2	40.94	54	-13.06	-	-	-	-	157	246	H
4	* 4.988	42	PK1	34.2	-26.7	49.5	-	-	74	-24.5	-	-	61	345	V
	* 4.987	35.25	AD1	34.2	-26.7	42.75	54	-11.25	-	-	-	-	61	345	V
2	* 5.129	41.63	PK1	34.4	-18.7	57.33	-	-	74	-16.67	-	-	157	246	H
	* 5.129	30.84	AD1	34.4	-18.7	46.54	54	-7.46	-	-	-	-	157	246	H
5	5.94	43.71	PK1	35.2	-18.2	60.71	-	-	-	-	68.2	-7.49	61	345	V
3	* 11.4	37.02	PK1	38.2	-21.4	53.82	-	-	74	-20.18	-	-	115	116	H
	* 11.4	26.11	AD1	38.2	-21.4	42.91	54	-11.09	-	-	-	-	115	116	H
6	* 11.399	40.14	PK1	38.2	-21.4	56.94	-	-	74	-17.06	-	-	115	119	V
	* 11.399	26.29	AD1	38.2	-21.4	43.09	54	-10.91	-	-	-	-	115	119	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

CHANNEL 144 HARMONICS AND SPURIOUS EMISSIONS

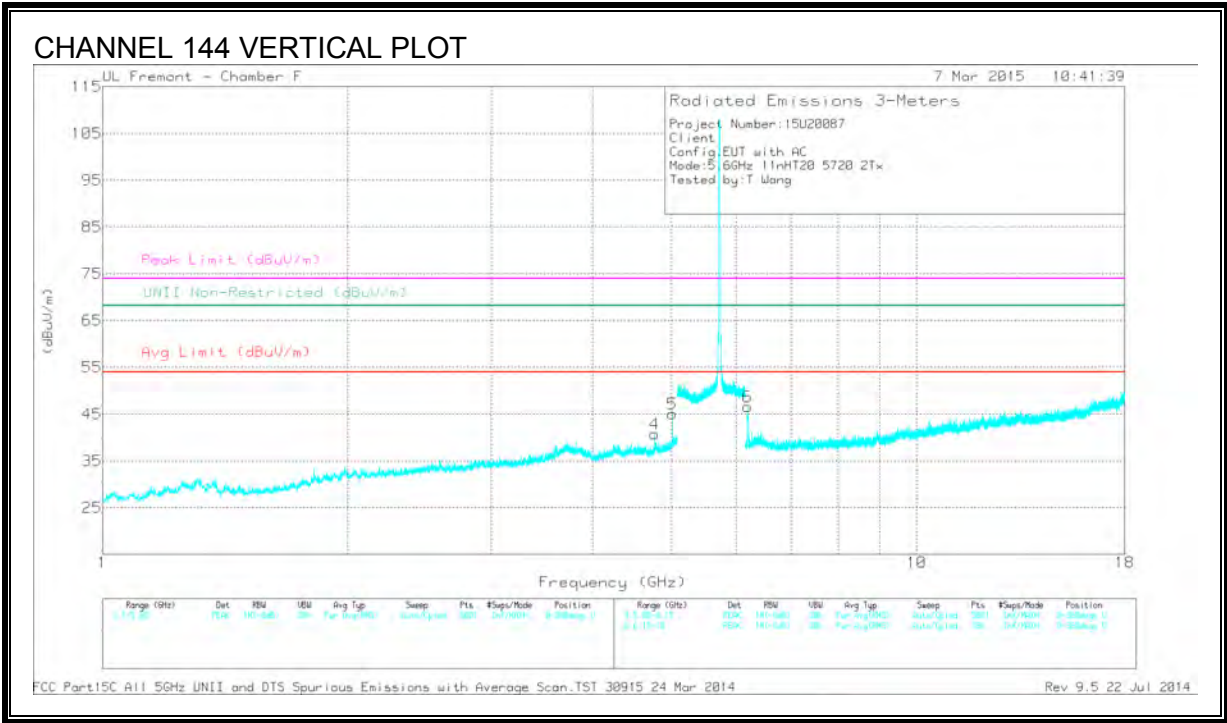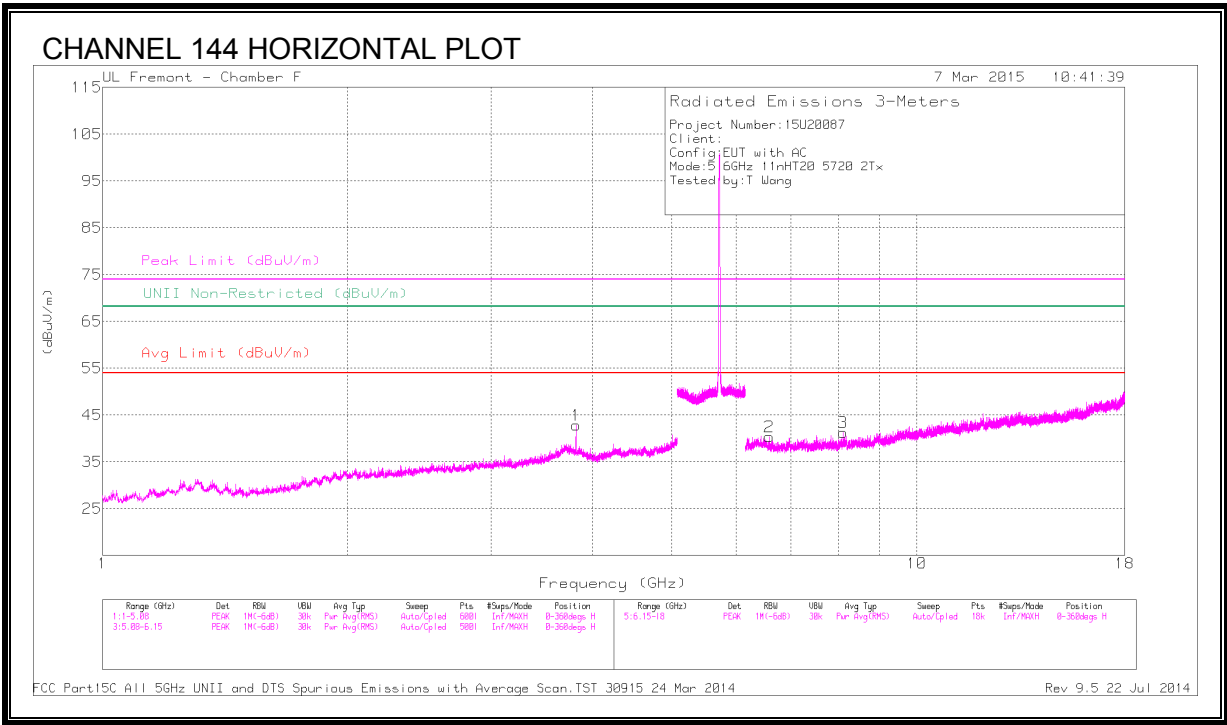

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/F Itr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.813	42.55	PK1	34.3	-29.1	47.75	-	-	74	-26.25	-	-	150	281	H
	* 3.813	36.17	AD1	34.3	-29.1	41.37	54	-12.63	-	-	-	-	150	281	H
5	* 5.005	42.15	PK1	34.2	-26.8	49.55	-	-	74	-24.45	-	-	64	341	V
	* 5.005	35.61	AD1	34.2	-26.8	43.01	54	-10.99	-	-	-	-	64	341	V
4	* 4.767	40.35	PK1	34.1	-27.5	46.95	-	-	74	-27.05	-	-	64	341	V
	* 4.767	31.17	AD1	34.1	-27.5	37.77	54	-16.23	-	-	-	-	64	341	V
3	* 8.118	36.72	PK1	35.7	-24.8	47.62	-	-	74	-26.38	-	-	351	182	H
	* 8.117	25	AD1	35.7	-24.8	35.9	54	-18.1	-	-	-	-	351	182	H
2	6.588	37.41	PK1	35.7	-25.9	47.21	-	-	-	-	68.2	-20.99	351	182	H
6	6.196	44.07	PK1	35.5	-26.8	52.77	-	-	-	-	68.2	-15.43	64	341	V


* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

9.16. 802.11n HT40 SISO MODE IN THE 5.6 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)

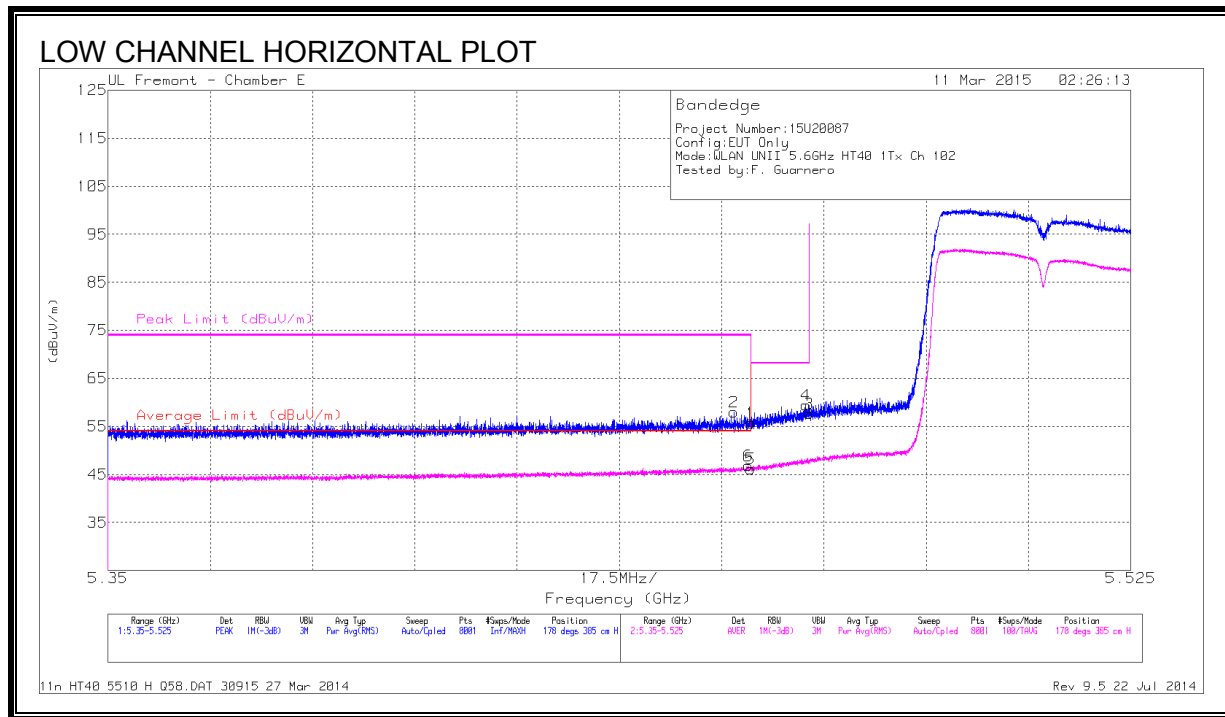


DATA

Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.457	44.18	PK	34.6	-20.8	57.98	-	-	74	-16.02	178	385	H
1	* 5.46	41.92	PK	34.6	-20.8	55.72	-	-	74	-18.28	178	385	H
5	* 5.46	32.36	RMS	34.6	-20.8	46.16	54	-7.84	-	-	178	385	H
6	* 5.46	33.03	RMS	34.6	-20.8	46.83	54	-7.17	-	-	178	385	H
4	5.469	45.66	PK	34.6	-20.8	59.46	-	-	68.2	-8.74	178	385	H
3	5.47	43.84	PK	34.6	-20.8	57.64	-	-	68.2	-10.56	178	385	H

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

RMS - RMS detection

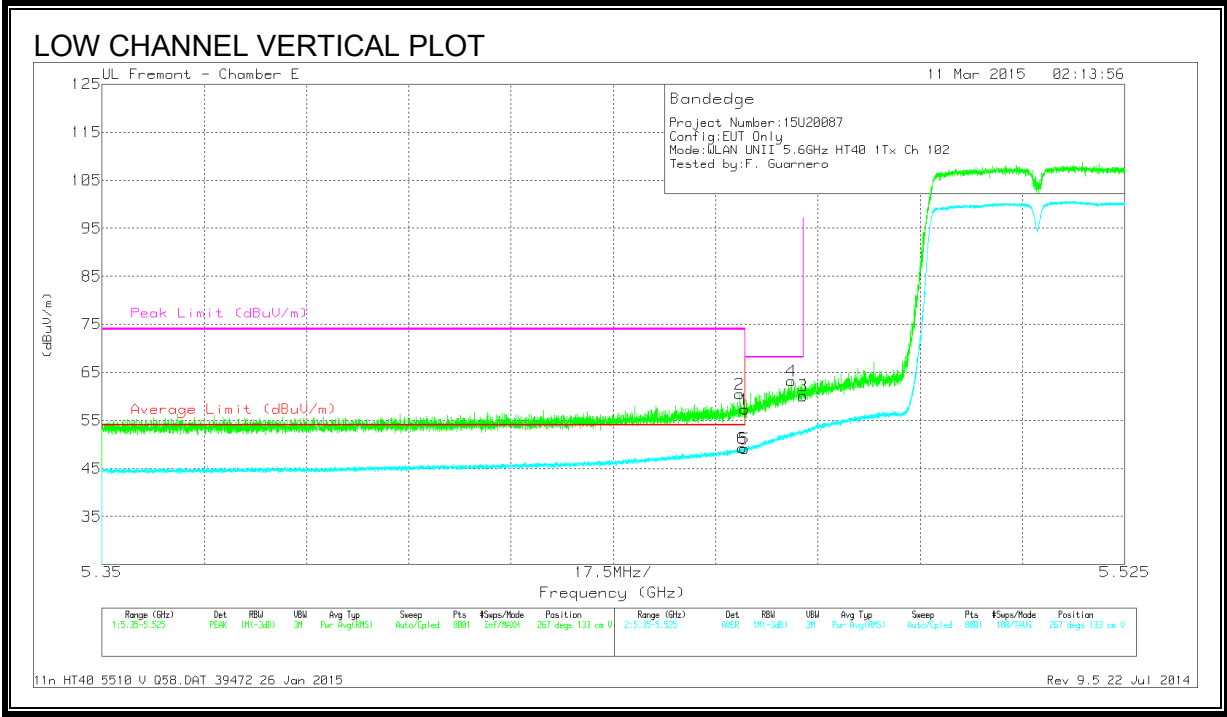


DATA

Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.459	46.68	PK	34.6	-20.8	60.48	-	-	74	-13.52	267	133	V
1	* 5.46	43.54	PK	34.6	-20.8	57.34	-	-	74	-16.66	267	133	V
5	* 5.46	35.36	RMS	34.6	-20.8	49.16	54	-4.84	-	-	267	133	V
6	* 5.46	35.43	RMS	34.6	-20.8	49.23	54	-4.77	-	-	267	133	V
4	5.468	49.43	PK	34.6	-20.8	63.23	-	-	68.2	-4.97	267	133	V
3	5.47	46.33	PK	34.6	-20.8	60.13	-	-	68.2	-8.07	267	133	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.
PK - Peak detector
RMS - RMS detection


RESTRICTED BANDEDGE (HIGH CHANNEL)

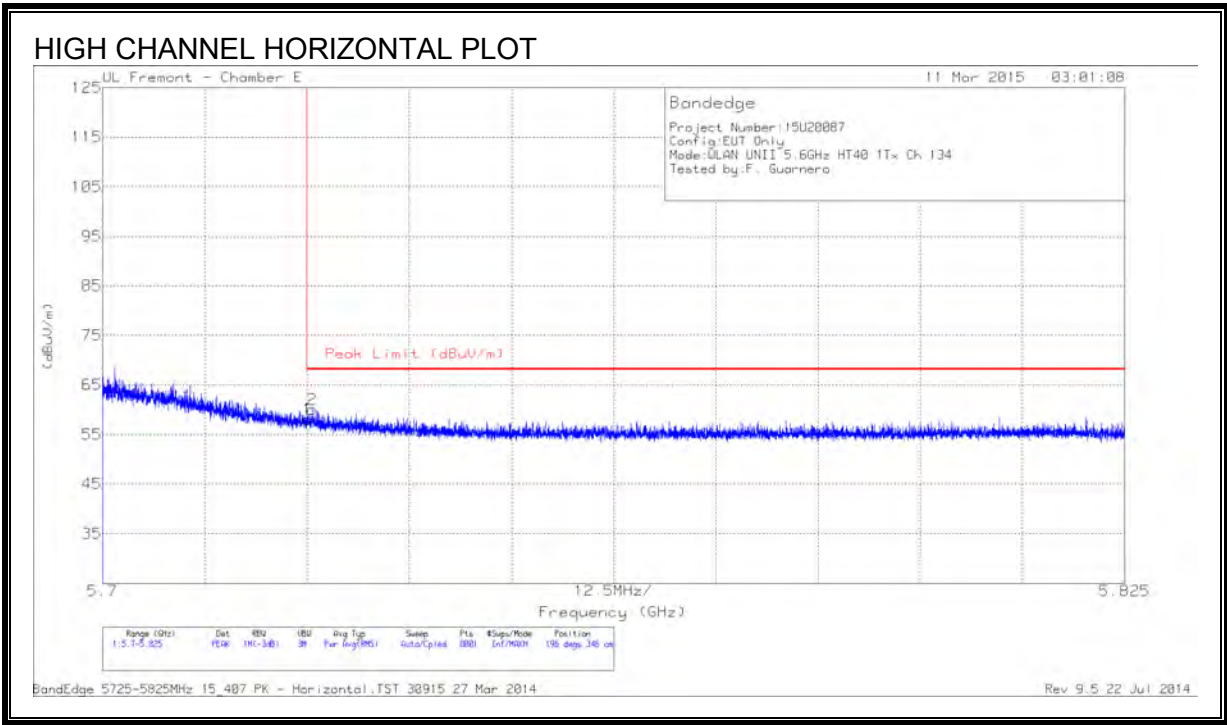

DATA

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Correcte d Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	44.19	PK	34.7	-20.8	58.09	68.2	-10.11	196	346	H
2	5.726	46.18	PK	34.7	-20.8	60.08	68.2	-8.12	196	346	H

PK - Peak detector


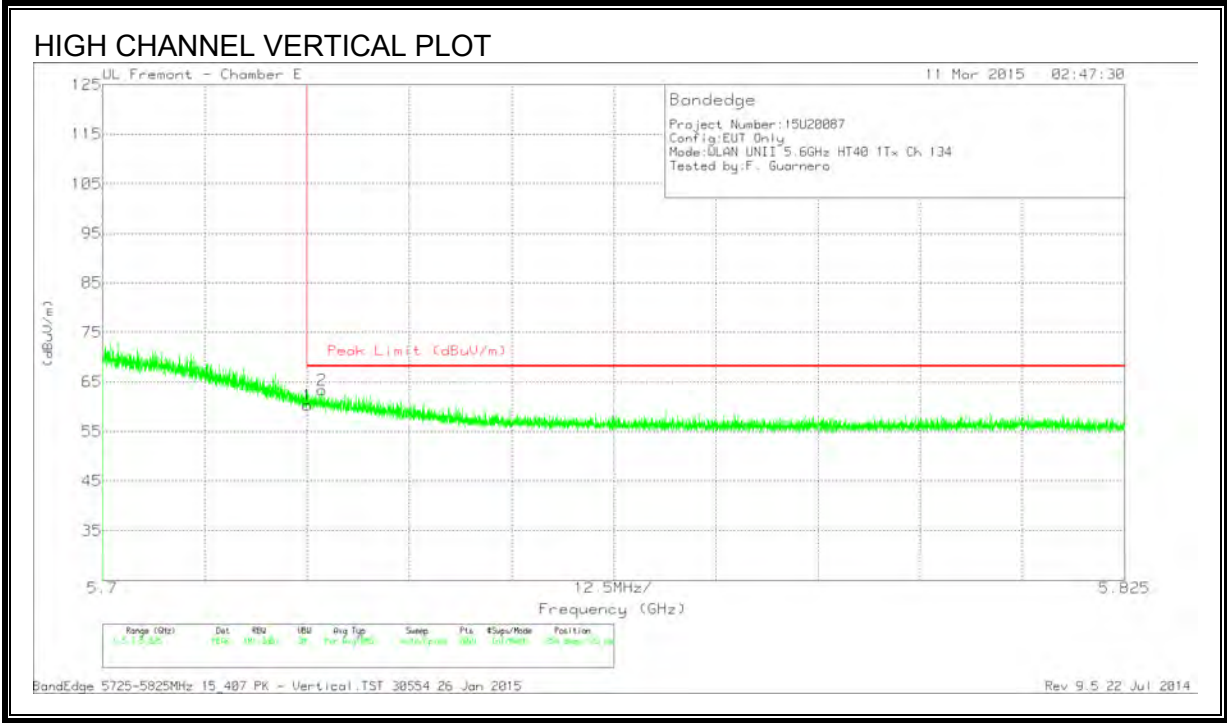


DATA

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Correcte d Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	46.39	PK	34.7	-20.8	60.29	68.2	-7.91	254	123	V
2	5.727	49.33	PK	34.7	-20.7	63.33	68.2	-4.87	254	123	V

PK - Peak detector

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

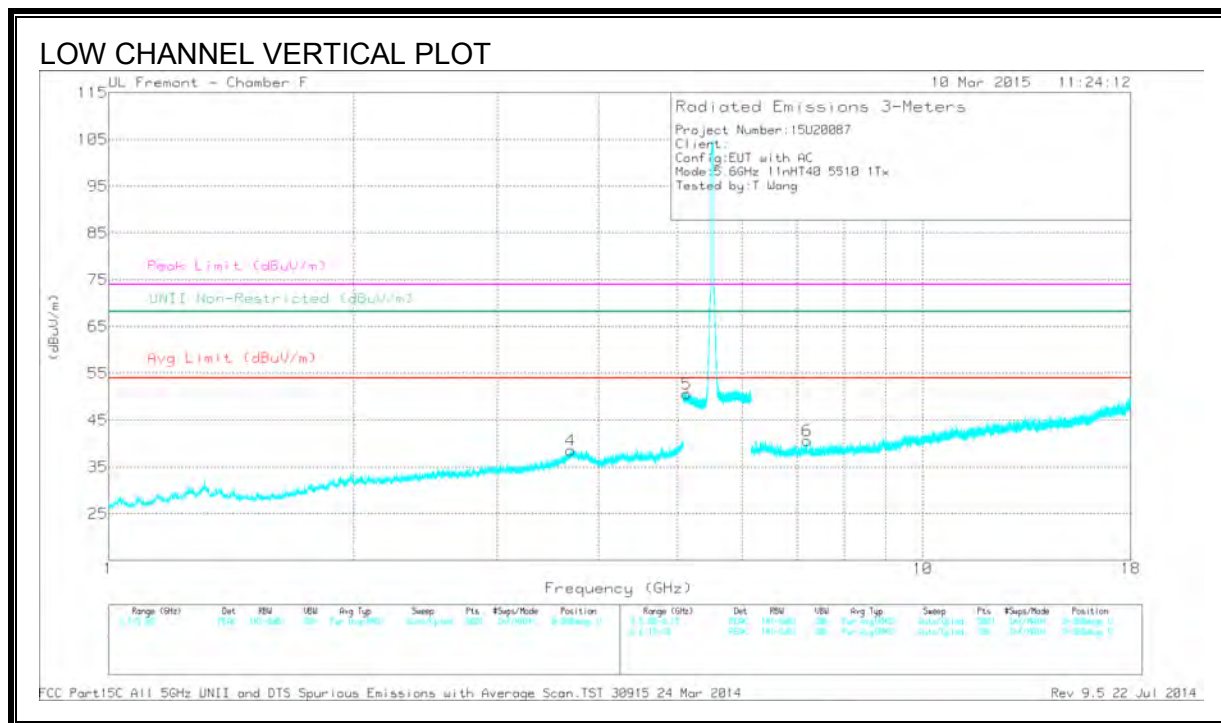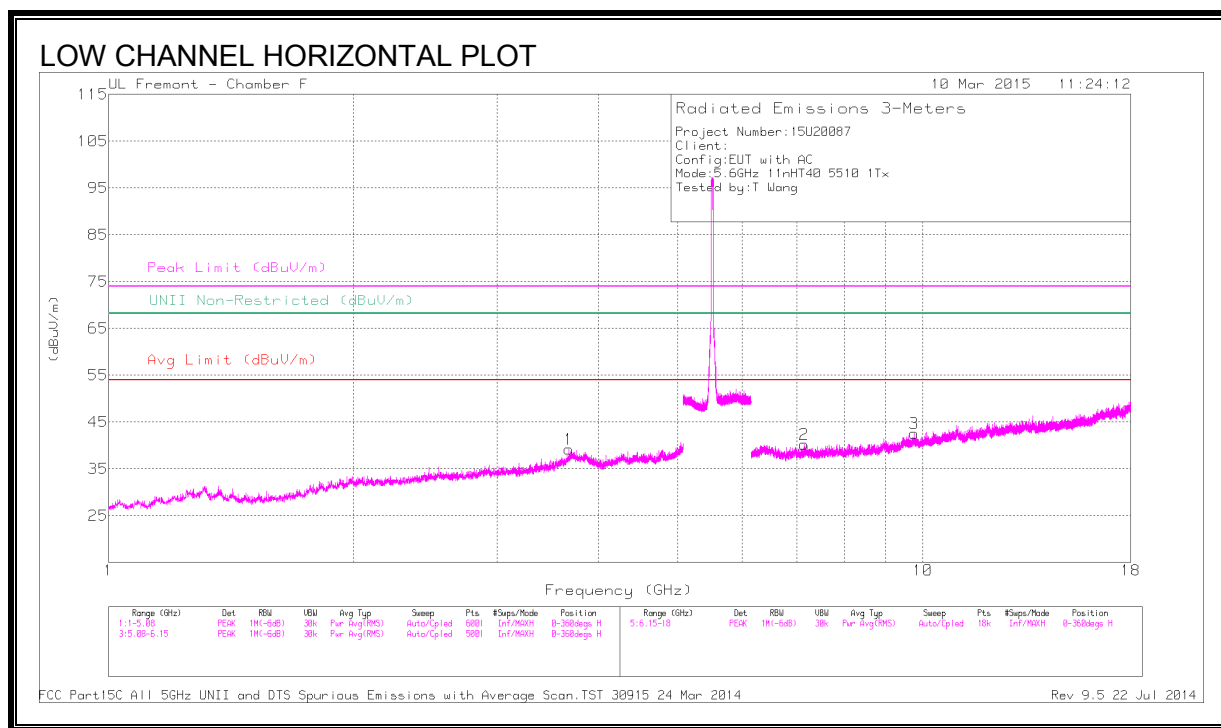

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/F Itr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.673	38.58	PK1	34.9	-28.6	44.88	-	-	74	-29.12	-	-	116	300	H
	* 3.673	28.76	AD1	34.9	-28.6	35.06	54	-18.94	-	-	-	-	116	300	H
4	* 3.692	37.84	PK1	34.9	-28.7	44.04	-	-	74	-29.96	-	-	270	121	V
	* 3.693	26.91	AD1	34.9	-28.7	33.11	54	-20.89	-	-	-	-	270	121	V
5	* 5.131	41.96	PK1	34.4	-18.7	57.66	-	-	74	-16.34	-	-	270	121	V
	* 5.131	30.97	AD1	34.4	-18.7	46.67	54	-7.33	-	-	-	-	270	121	V
2	7.147	36.65	PK1	35.5	-26.2	45.95	-	-	-	-	68.2	-22.25	116	300	H
3	9.764	34.33	PK1	37.1	-22.3	49.13	-	-	-	-	68.2	-19.07	116	300	H
6	7.216	37.07	PK1	35.5	-25.4	47.17	-	-	-	-	68.2	-21.03	270	121	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS

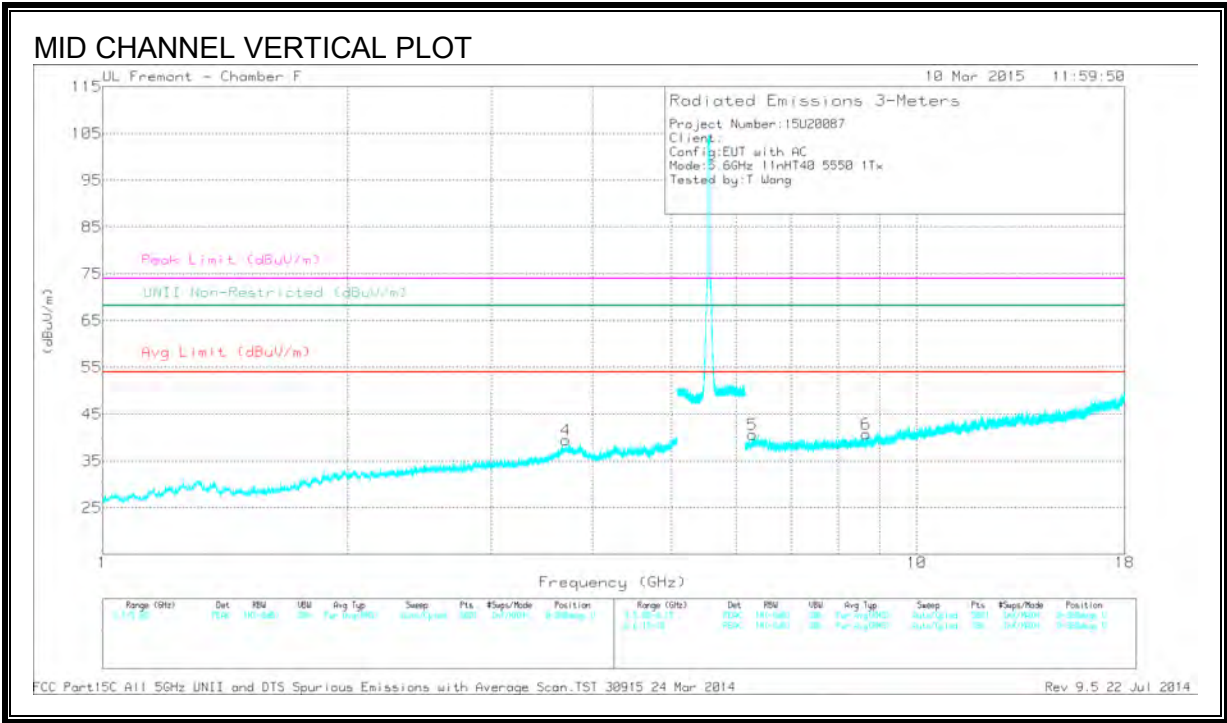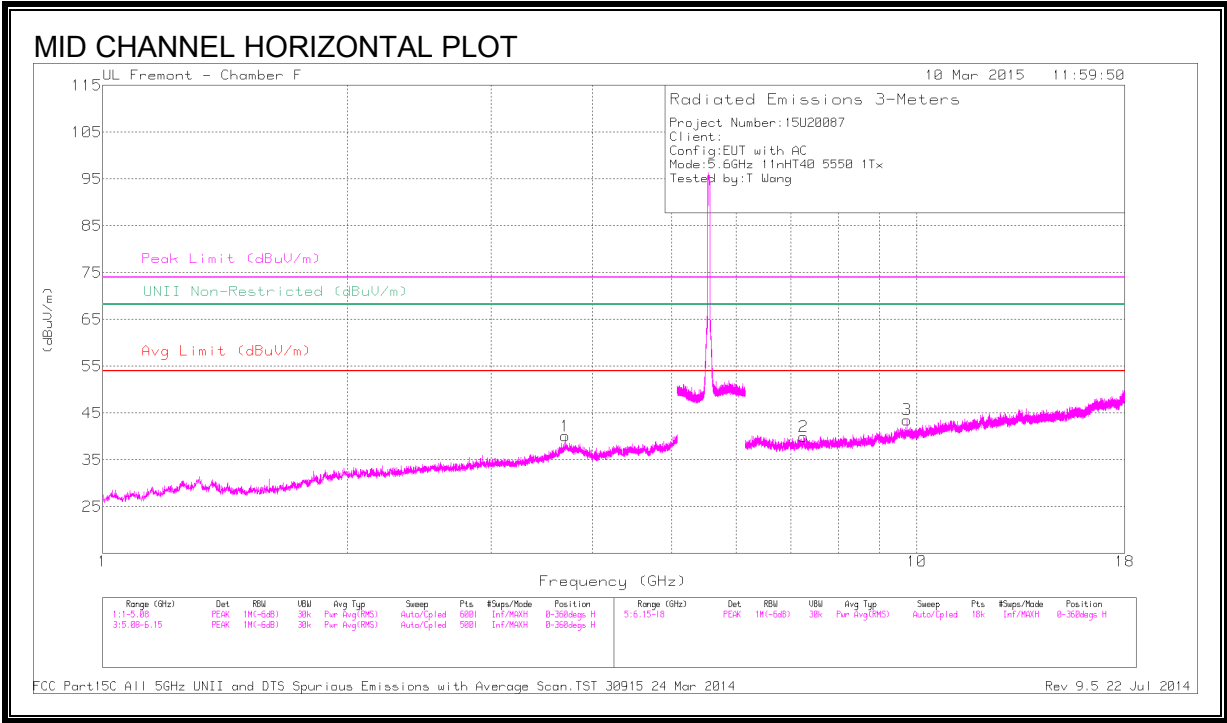

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.7	39.35	PK1	34.9	-28.7	45.55	-	-	74	-28.45	-	-	134	173	H
	* 3.7	30.28	AD1	34.9	-28.7	36.48	54	-17.52	-	-	-	-	134	173	H
4	* 3.705	38.76	PK1	34.8	-28.8	44.76	-	-	74	-29.24	-	-	210	182	V
	* 3.704	27.05	AD1	34.8	-28.8	33.05	54	-20.95	-	-	-	-	210	182	V
2	* 7.261	37.28	PK1	35.5	-25.3	47.48	-	-	74	-26.52	-	-	134	173	H
	* 7.26	26.04	AD1	35.5	-25.3	36.24	54	-17.76	-	-	-	-	134	173	H
3	9.725	34.18	PK1	37.1	-22.1	49.18	-	-	-	-	68.2	-19.02	134	173	H
5	6.284	37.51	PK1	35.5	-26.7	46.31	-	-	-	-	68.2	-21.89	210	182	V
6	8.659	34.92	PK1	35.9	-23.9	46.92	-	-	-	-	68.2	-21.28	210	182	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS

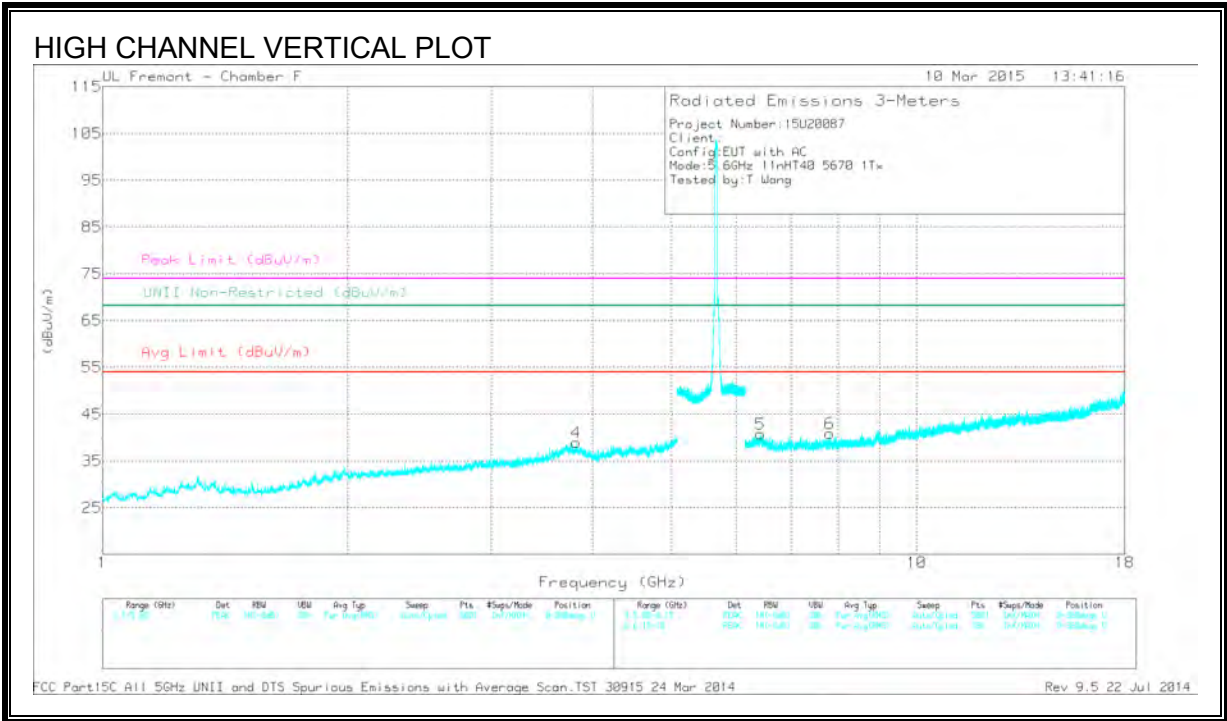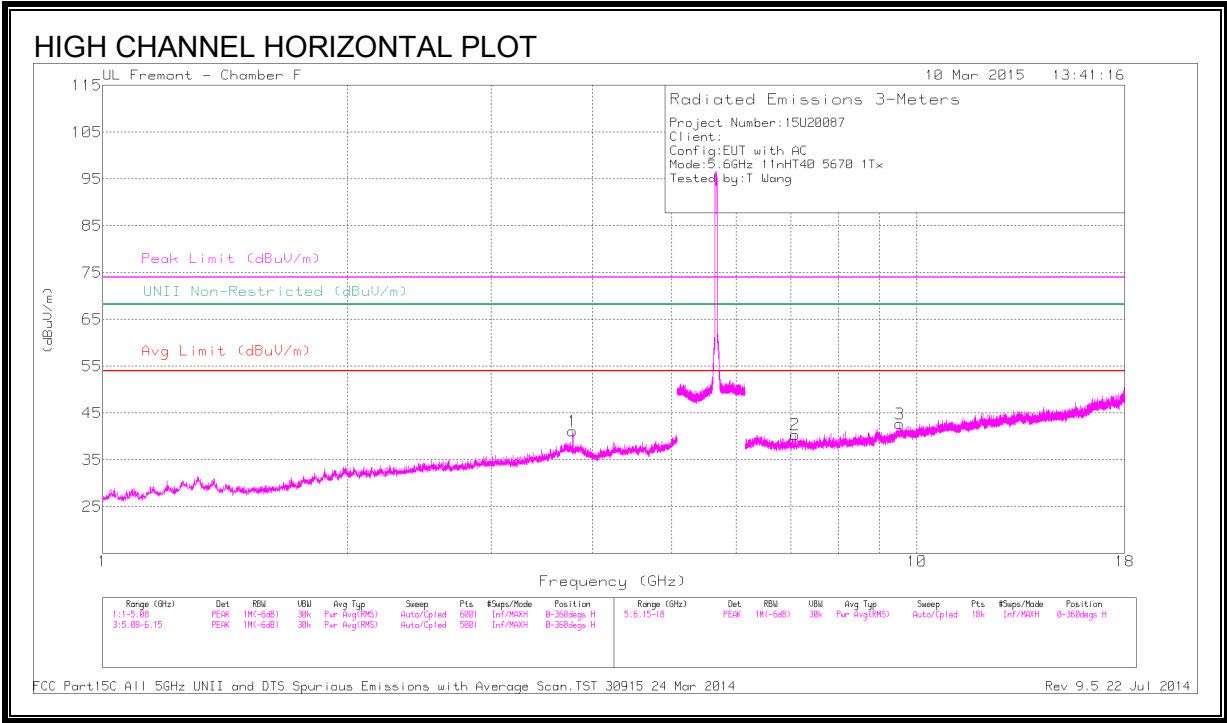

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.78	41.93	PK1	34.5	-29.3	47.13	-	-	74	-26.87	-	-	121	247	H
	* 3.78	33.89	AD1	34.5	-29.3	39.09	54	-14.91	-	-	-	-	121	247	H
4	* 3.816	39.27	PK1	34.3	-29	44.57	-	-	74	-29.43	-	-	343	126	V
	* 3.817	27.42	AD1	34.3	-29	32.72	54	-21.28	-	-	-	-	343	126	V
2	7.09	37.51	PK1	35.5	-26.2	46.81	-	-	-	-	68.2	-21.39	121	247	H
3	9.529	34.17	PK1	36.9	-21.6	49.47	-	-	-	-	68.2	-18.73	121	247	H
5	6.429	38.38	PK1	35.6	-26.8	47.18	-	-	-	-	68.2	-21.02	343	126	V
6	7.82	35.72	PK1	35.7	-24.6	46.82	-	-	-	-	68.2	-21.38	343	126	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

CHANNEL 142 HARMONICS AND SPURIOUS EMISSIONS

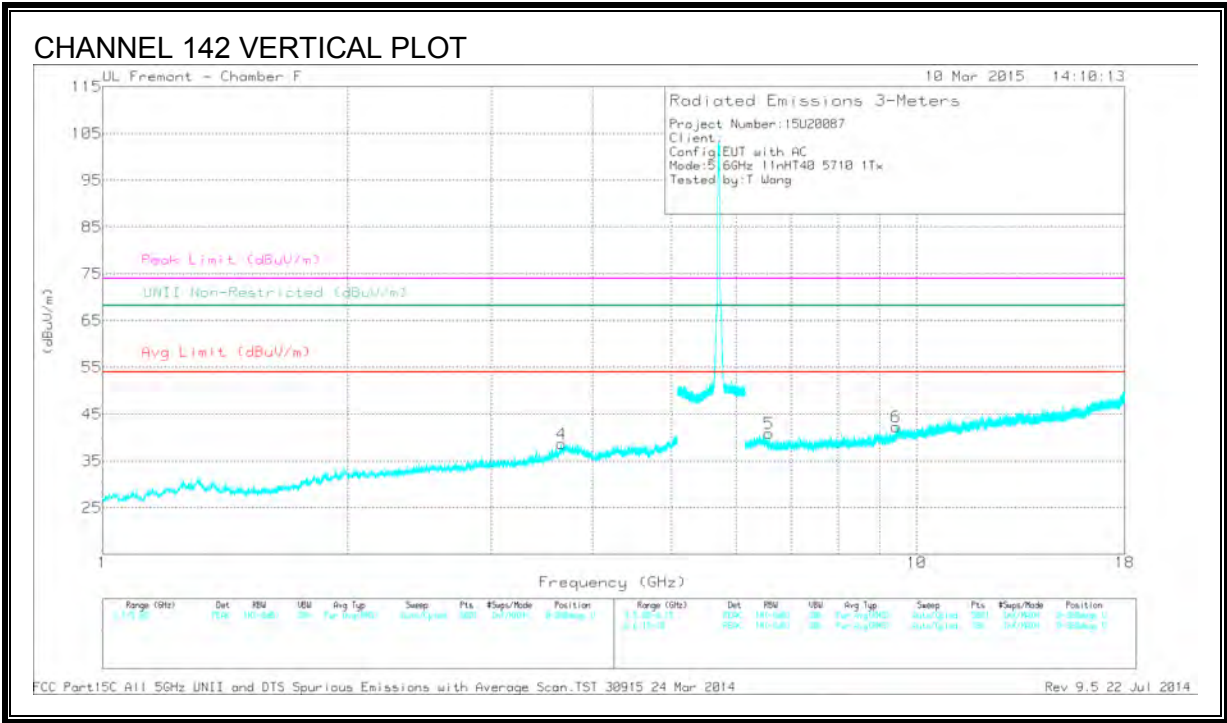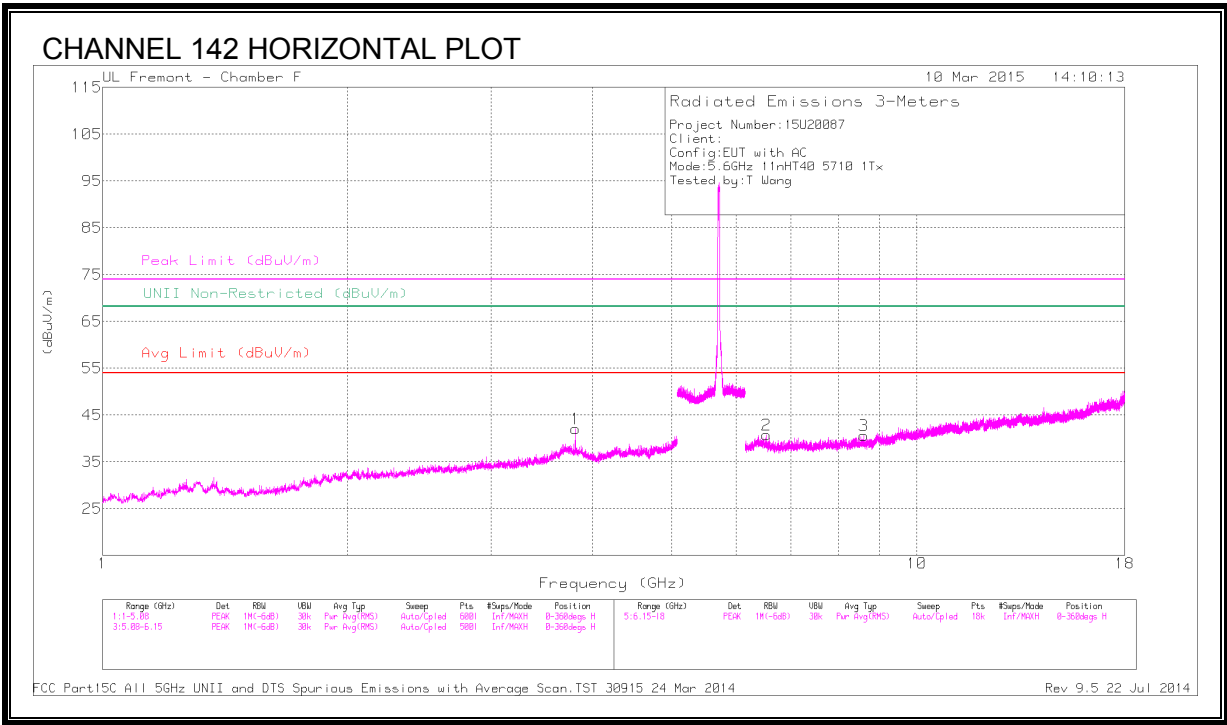

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.807	42.42	PK1	34.4	-29.2	47.62	-	-	74	-26.38	-	-	141	279	H
	* 3.807	35.94	AD1	34.4	-29.2	41.14	54	-12.86	-	-	-	-	141	279	H
4	* 3.663	38.34	PK1	34.9	-28.8	44.44	-	-	74	-29.56	-	-	127	206	V
	* 3.661	26.76	AD1	34.9	-28.8	32.86	54	-21.14	-	-	-	-	127	206	V
2	6.537	37.65	PK1	35.7	-25.7	47.65	-	-	-	-	68.2	-20.55	141	279	H
3	8.61	35.36	PK1	35.8	-24.2	46.96	-	-	-	-	68.2	-21.24	141	279	H
5	6.578	37.14	PK1	35.7	-25.8	47.04	-	-	-	-	68.2	-21.16	127	206	V
6	* 9.42	34.66	PK1	36.7	-22.5	48.86	-	-	74	-25.14	-	-	127	206	V
	* 9.419	23.47	AD1	36.7	-22.5	37.67	54	-16.33	-	-	-	-	127	206	V


* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

9.17. 802.11n HT40 2Tx CDD MODE IN THE 5.6 GHz BAND


RESTRICTED BANDEDGE (LOW CHANNEL)

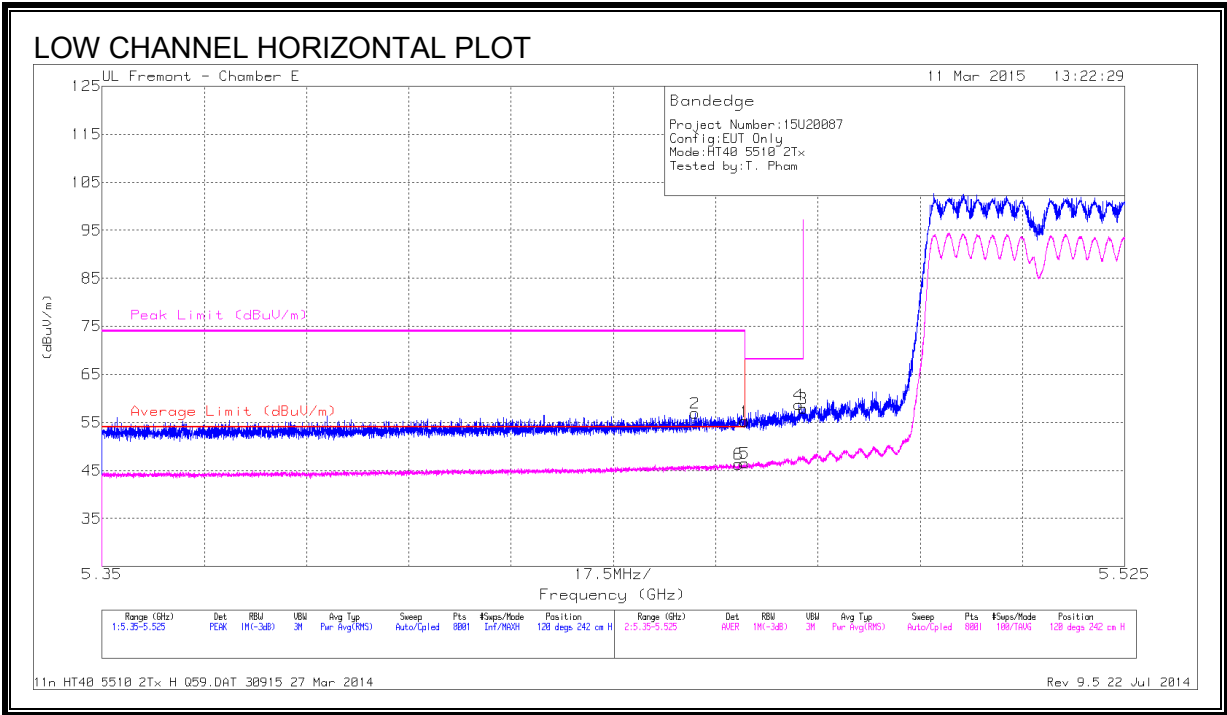

DATA

Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	41.44	PK	34.6	-20.8	55.24	-	-	74	-18.76	120	242	H
2	* 5.451	43.22	PK	34.6	-20.9	56.92	-	-	74	-17.08	120	242	H
5	* 5.46	32.69	RMS	34.6	-20.8	46.49	54	-7.51	-	-	120	242	H
6	* 5.459	32.5	RMS	34.6	-20.8	46.3	54	-7.7	-	-	120	242	H
4	5.469	44.88	PK	34.6	-20.8	58.68	-	-	68.2	-9.52	120	242	H
3	5.47	44.07	PK	34.6	-20.8	57.87	-	-	68.2	-10.33	120	242	H

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.
PK - Peak detector
RMS - RMS detection

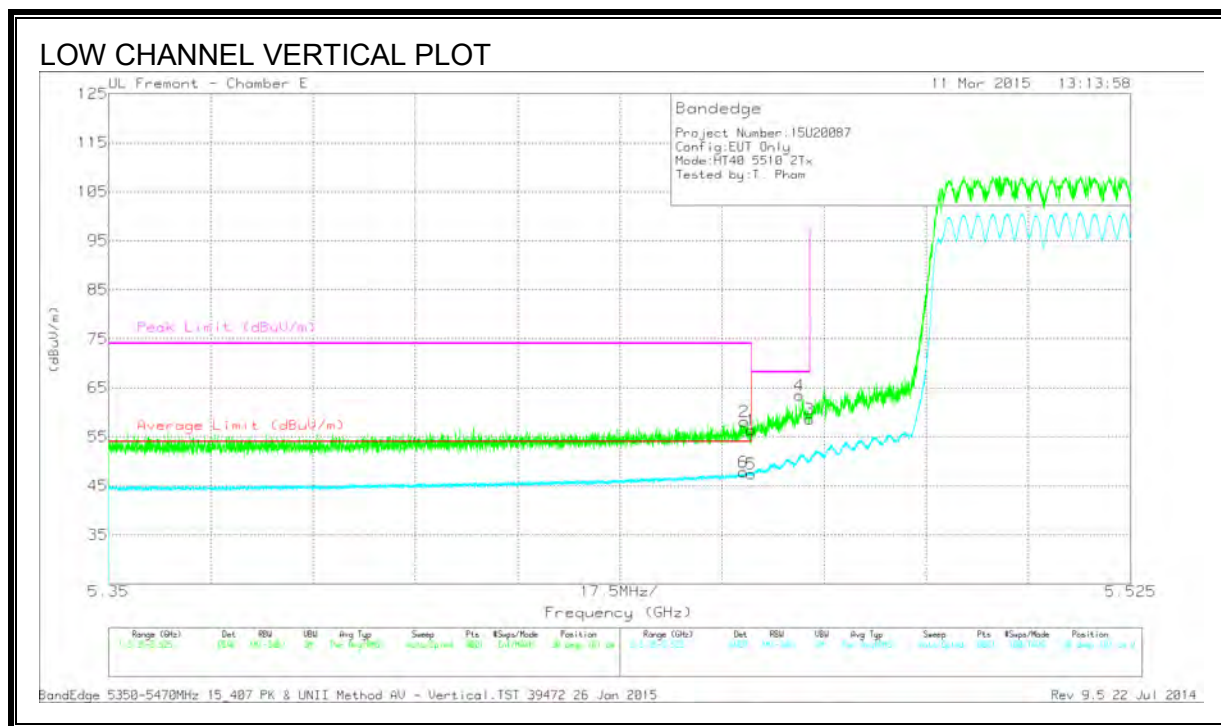

DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	42.61	PK	34.6	-20.8	56.41	-	-	74	-17.59	38	181	V
2	* 5.459	44.26	PK	34.6	-20.8	58.06	-	-	74	-15.94	38	181	V
5	* 5.46	33.67	RMS	34.6	-20.8	47.47	54	-6.53	-	-	38	181	V
6	* 5.459	34.02	RMS	34.6	-20.8	47.82	54	-6.18	-	-	38	181	V
4	5.468	49.6	PK	34.6	-20.8	63.4	-	-	68.2	-4.8	38	181	V
3	5.47	44.82	PK	34.6	-20.8	58.62	-	-	68.2	-9.58	38	181	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

RMS - RMS detection


RESTRICTED BANDEDGE (HIGH CHANNEL)

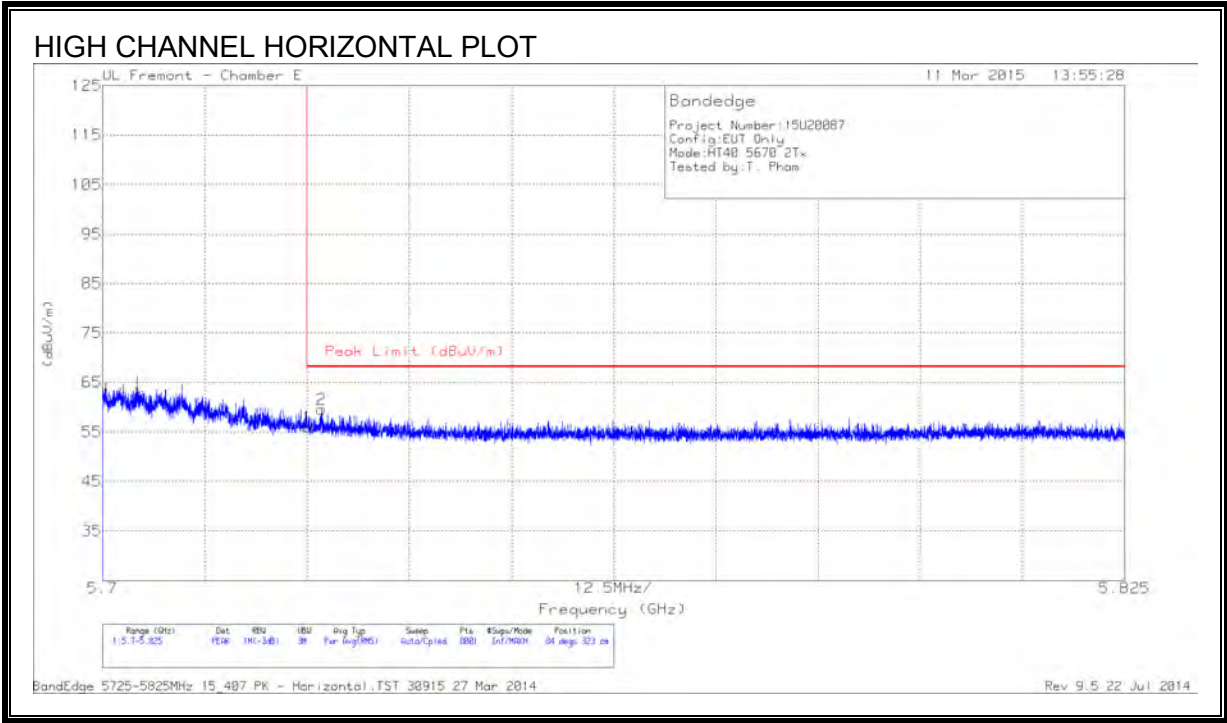

DATA

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Correcte d Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.11	PK	34.7	-20.8	56.01	68.2	-12.19	84	323	H
2	5.727	45.6	PK	34.7	-20.7	59.6	68.2	-8.6	84	323	H

PK - Peak detector


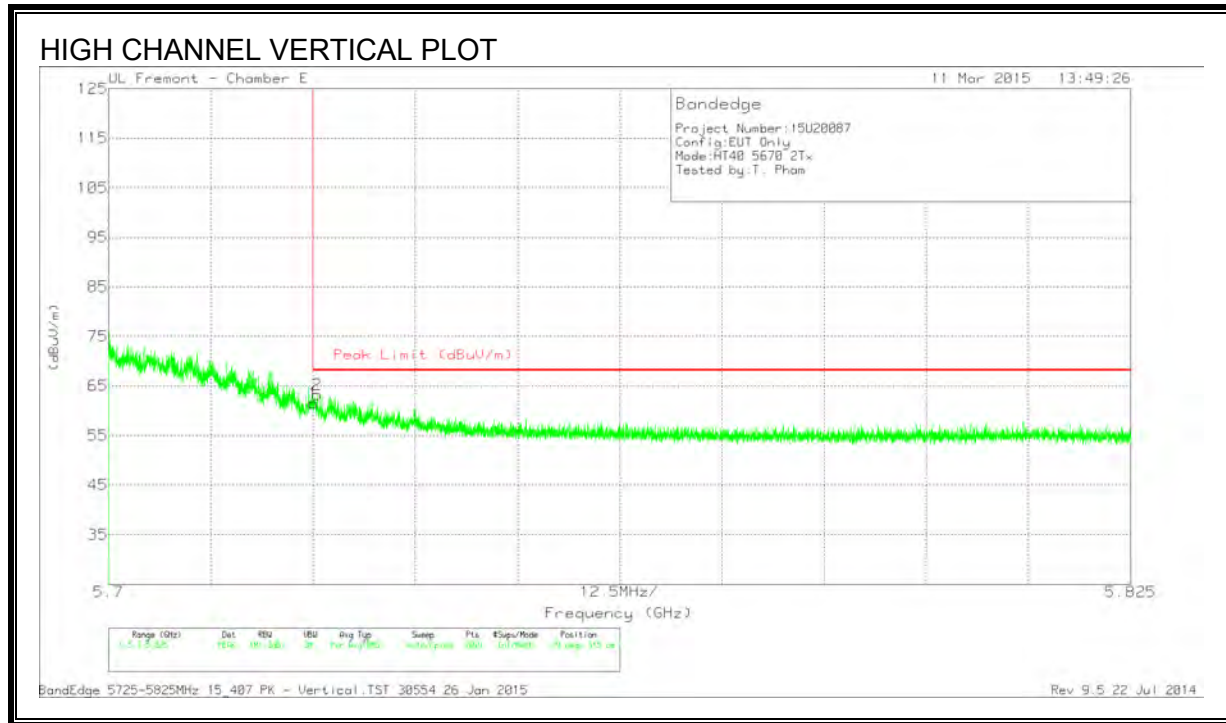


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	47.64	PK	34.7	-20.8	61.54	68.2	-6.66	29	315	V
2	5.726	49.39	PK	34.7	-20.8	63.29	68.2	-4.91	29	315	V

PK - Peak detector

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

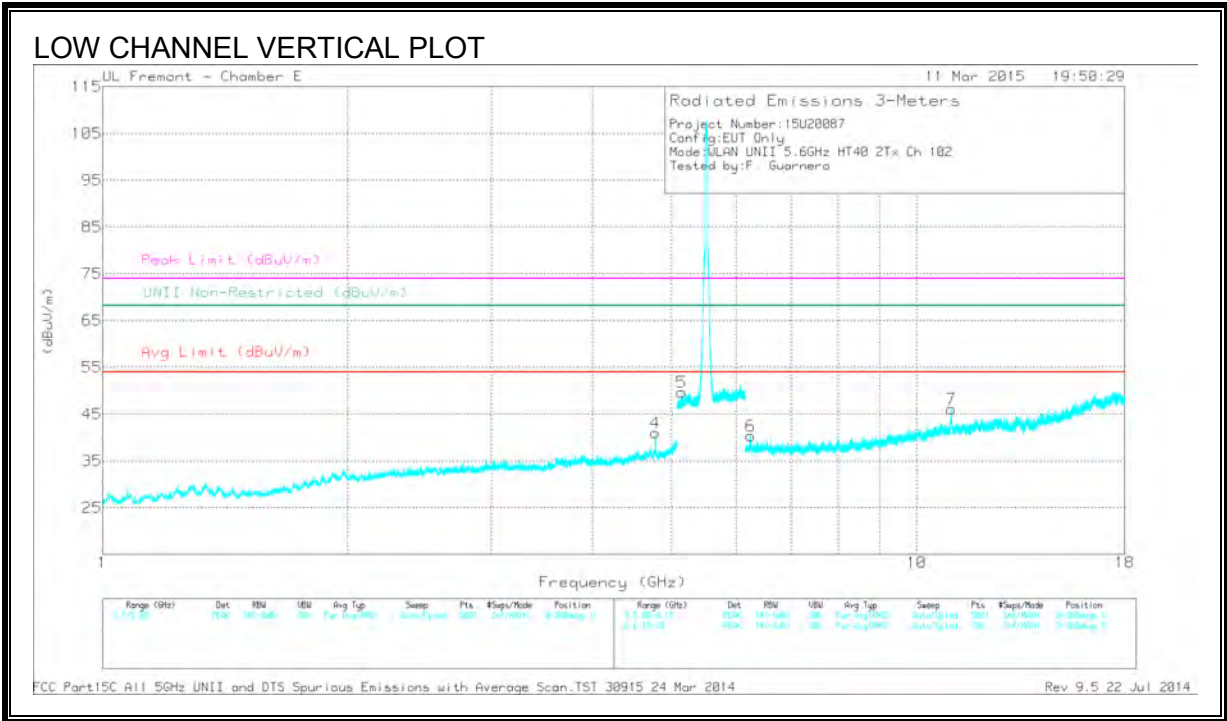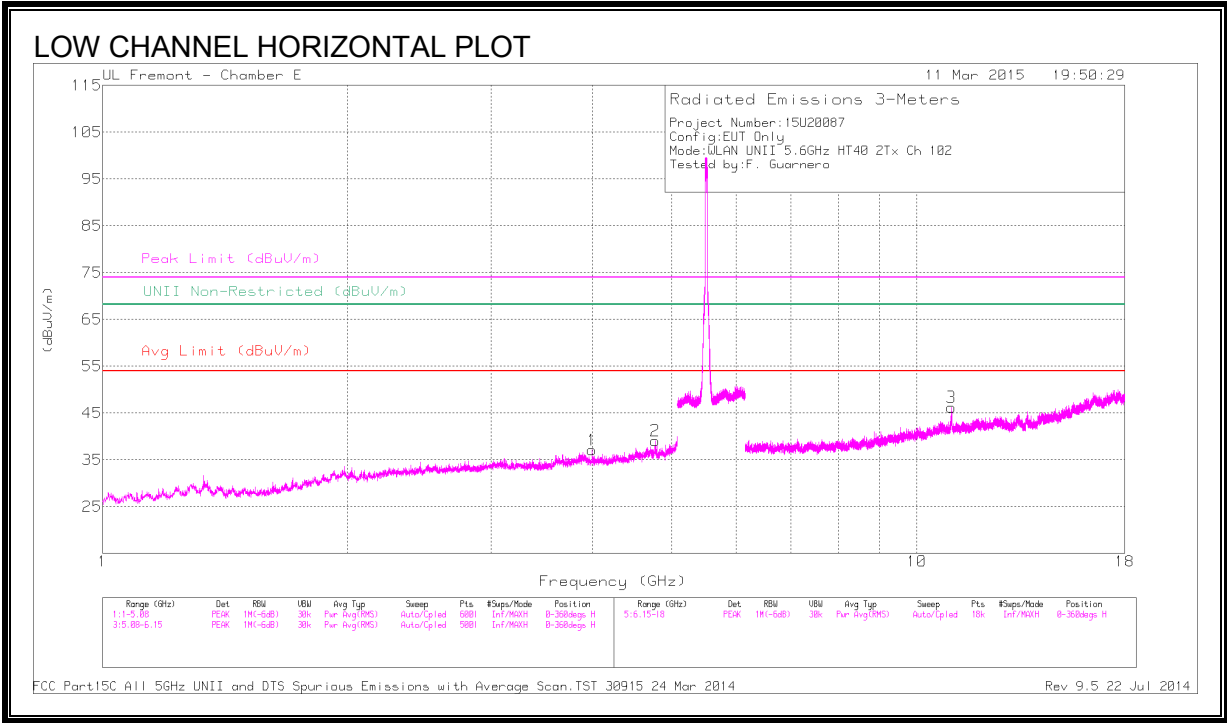

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dBm)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.992	42.09	PK1	33.4	-31.7	43.79	-	-	74	-30.21	-	-	304	378	H
	* 3.995	30.56	AD1	33.4	-31.7	32.26	54	-21.74	-	-	-	-	304	378	H
2	* 4.775	43.06	PK1	34.1	-30.4	46.76	-	-	74	-27.24	-	-	159	104	H
	* 4.775	33.09	AD1	34.1	-30.4	36.79	54	-17.21	-	-	-	-	159	104	H
4	* 4.775	44.66	PK1	34.1	-30.4	48.36	-	-	74	-25.64	-	-	250	240	V
	* 4.775	36.84	AD1	34.1	-30.4	40.54	54	-13.46	-	-	-	-	250	240	V
5	* 5.143	44.56	PK1	34.3	-21.6	57.26	-	-	74	-16.74	-	-	271	196	V
	* 5.143	34.77	AD1	34.3	-21.6	47.47	54	-6.53	-	-	-	-	271	196	V
3	* 11.02	42.9	PK1	37.9	-23.9	56.9	-	-	74	-17.1	-	-	273	380	H
	* 11.02	31.48	AD1	37.9	-23.9	45.48	54	-8.52	-	-	-	-	273	380	H
7	* 11.019	40.85	PK1	37.9	-23.9	54.85	-	-	74	-19.15	-	-	290	214	V
	* 11.021	29.93	AD1	37.9	-23.9	43.93	54	-10.07	-	-	-	-	290	214	V
6	6.254	42.26	PK1	35.4	-29.7	47.96	-	-	-	-	68.2	-20.24	233	121	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS

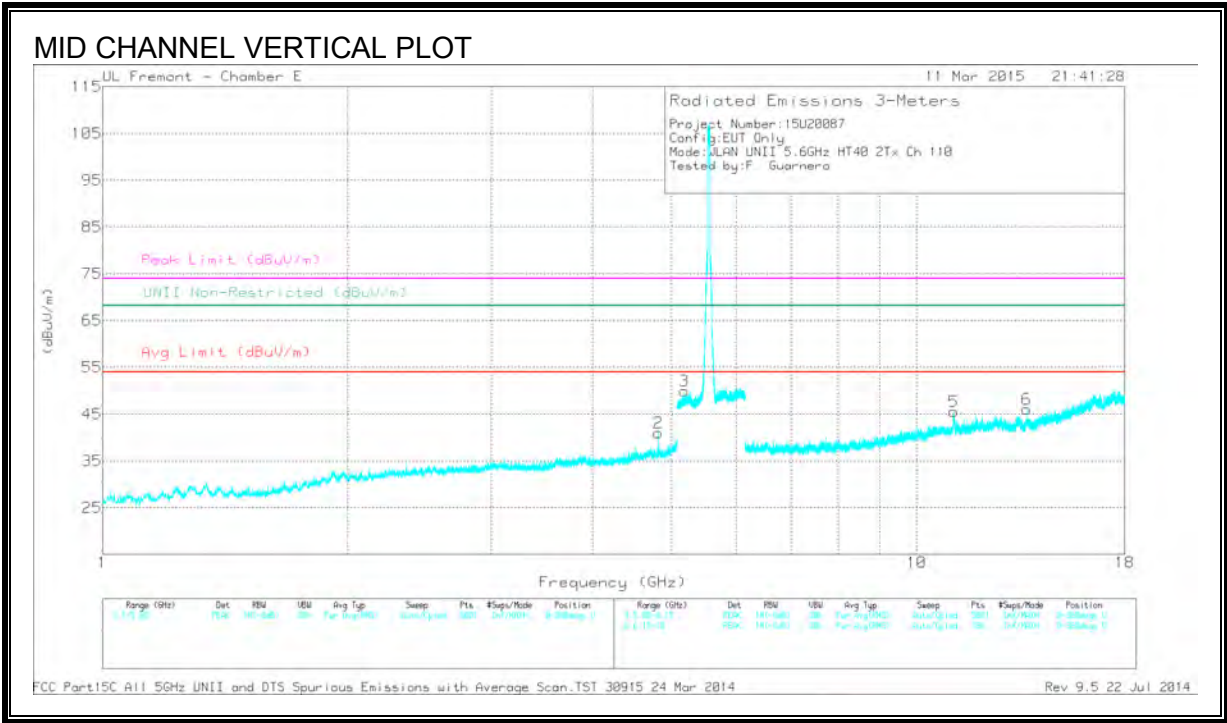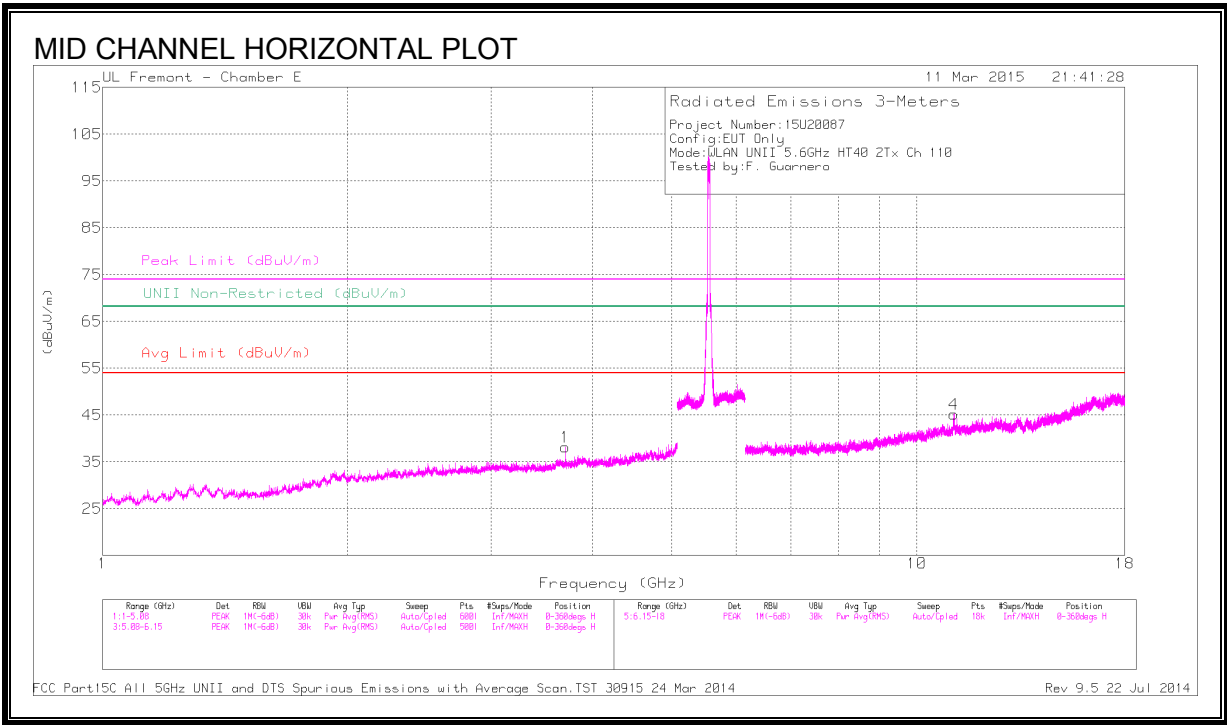

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dBm)	Amp/Cbl/F Itr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.7	44.11	PK1	33.2	-31.6	45.71	-	-	74	-28.29	-	-	6	226	H
	* 3.7	34.04	AD1	33.2	-31.6	35.64	54	-18.36	-	-	-	-	6	226	H
2	* 4.81	44.65	PK1	34.1	-30.3	48.45	-	-	74	-25.55	-	-	260	374	V
	* 4.81	37.74	AD1	34.1	-30.3	41.54	54	-12.46	-	-	-	-	260	374	V
4	* 11.108	40.95	PK1	37.9	-24.3	54.55	-	-	74	-19.45	-	-	234	158	H
	* 11.101	29.22	AD1	37.9	-24.3	42.82	54	-11.18	-	-	-	-	234	158	H
5	* 11.099	41.03	PK1	37.9	-24.3	54.63	-	-	74	-19.37	-	-	310	113	V
	* 11.099	29.01	AD1	37.9	-24.3	42.61	54	-11.39	-	-	-	-	310	113	V
3	5.18	44.64	PK1	34.4	-21.5	57.54	-	-	-	-	68.2	-10.66	254	161	V
6	13.637	37.97	PK1	38.6	-24.4	52.17	-	-	-	-	68.2	-16.03	334	308	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS

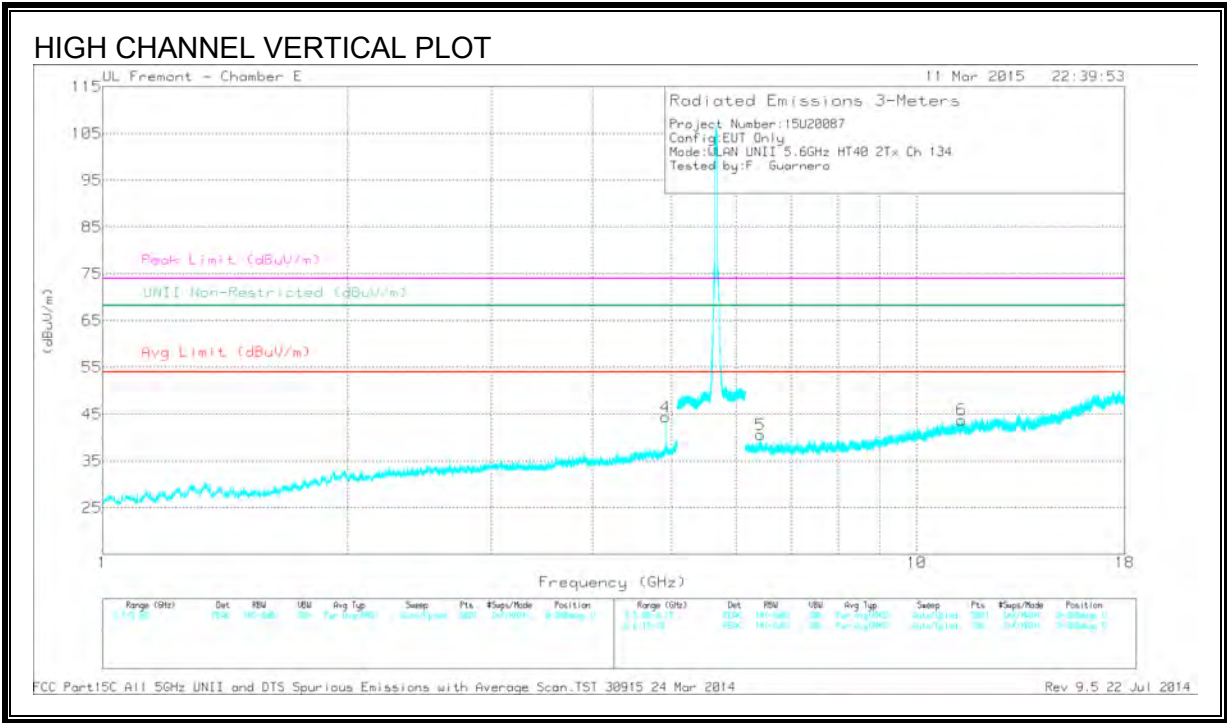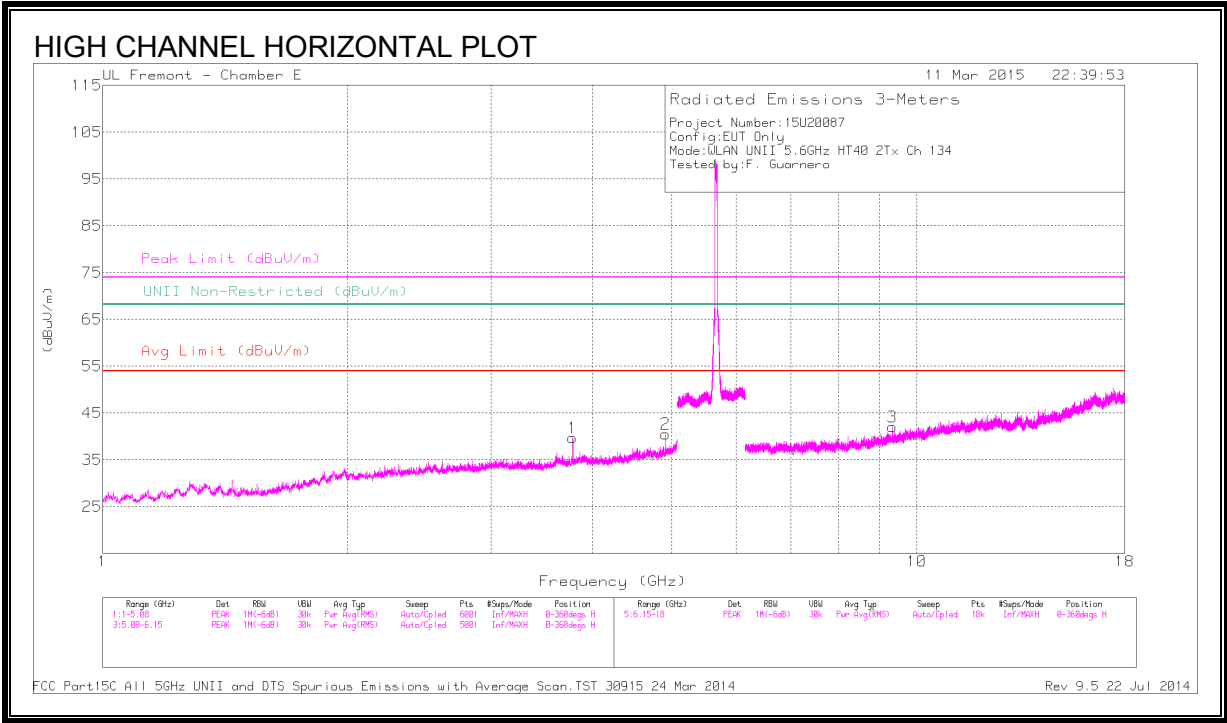

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/F ttr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.78	45.21	PK1	33.4	-31.9	46.71	-	-	74	-27.29	-	-	345	218	H
	* 3.78	38.26	AD1	33.4	-31.9	39.76	54	-14.24	-	-	-	-	345	218	H
2	* 4.914	43.54	PK1	34.1	-29.7	47.94	-	-	74	-26.06	-	-	187	374	H
	* 4.914	33.02	AD1	34.1	-29.7	37.42	54	-16.58	-	-	-	-	187	374	H
4	* 4.914	44.81	PK1	34.1	-29.7	49.21	-	-	74	-24.79	-	-	267	204	V
	* 4.914	37.86	AD1	34.1	-29.7	42.26	54	-11.74	-	-	-	-	267	204	V
3	* 9.329	36.76	PK1	36.6	-25.3	48.06	-	-	74	-25.94	-	-	351	385	H
	* 9.329	25.53	AD1	36.6	-25.3	36.83	54	-17.17	-	-	-	-	351	385	H
6	* 11.341	37.93	PK1	38	-23.6	52.33	-	-	74	-21.67	-	-	316	221	V
	* 11.339	26.83	AD1	38	-23.6	41.23	54	-12.77	-	-	-	-	316	221	V
5	6.426	42.66	PK1	35.5	-29.1	49.06	-	-	-	-	68.2	-19.14	233	232	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

CHANNEL 142 HARMONICS AND SPURIOUS EMISSIONS

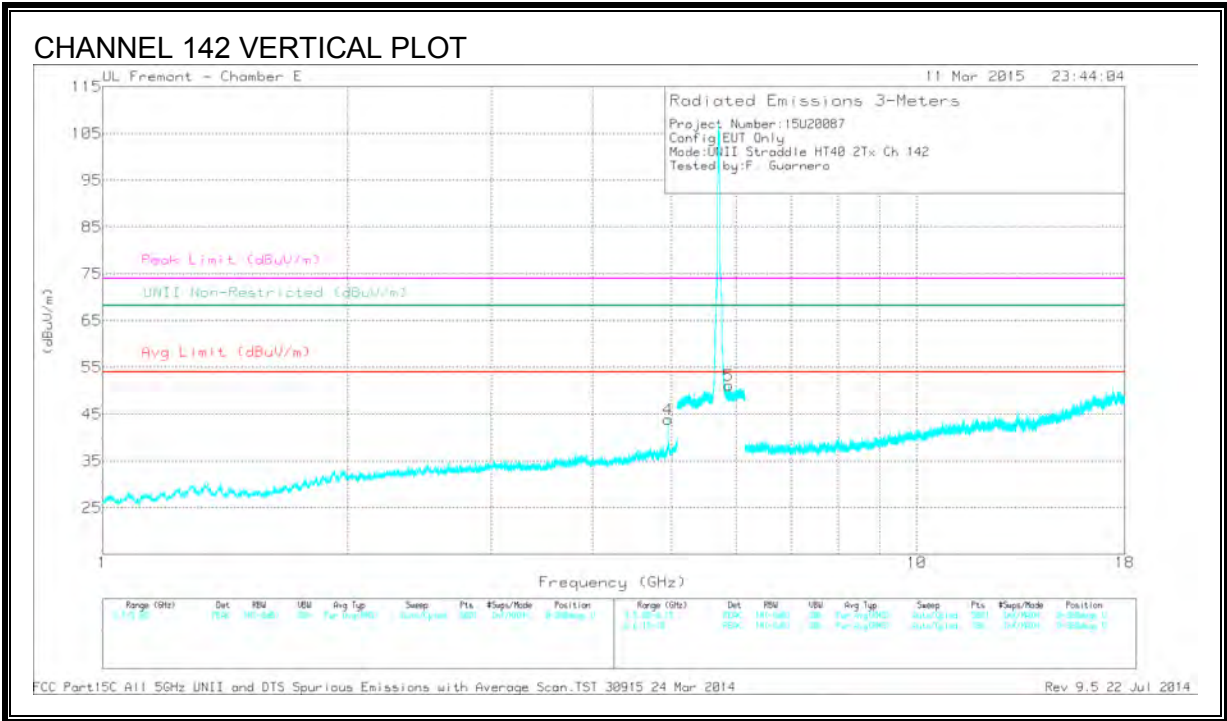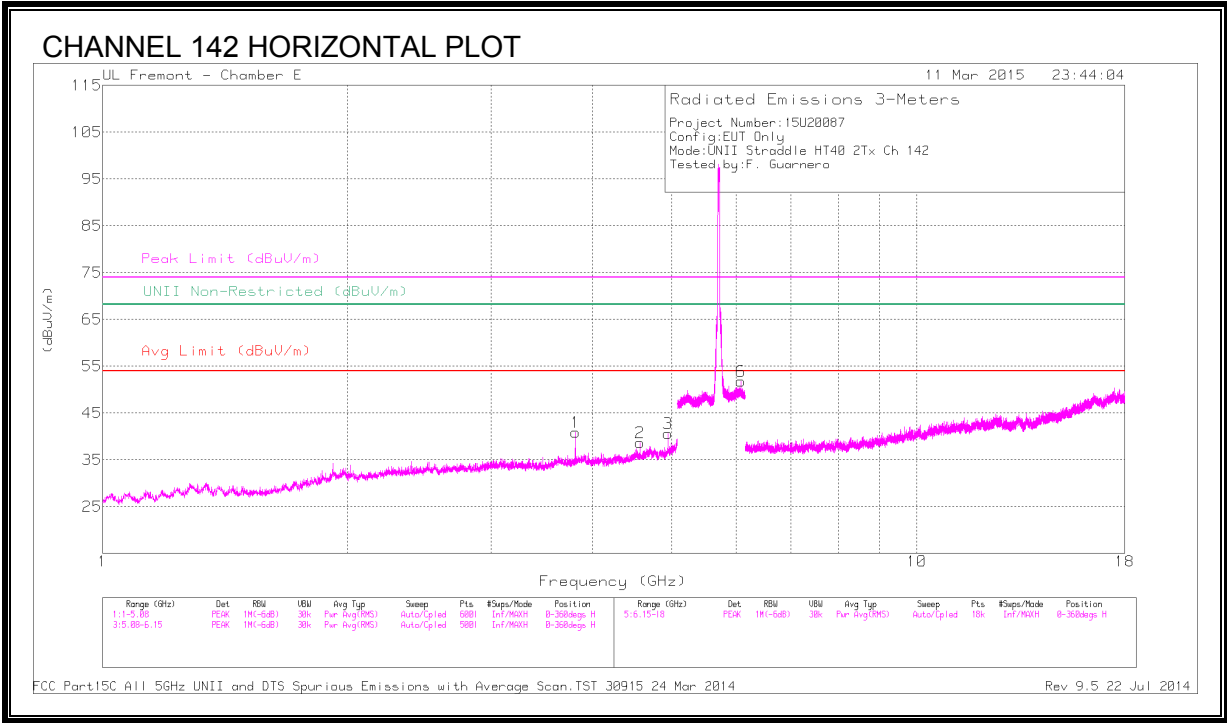

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.807	45.97	PK1	33.5	-31.9	47.57	-	-	74	-26.43	-	-	344	246	H
	* 3.807	39.01	AD1	33.5	-31.9	40.61	54	-13.39	-	-	-	-	344	246	H
2	* 4.568	42.87	PK1	34.1	-30.7	46.27	-	-	74	-27.73	-	-	142	201	H
	* 4.568	33.05	AD1	34.1	-30.7	36.45	54	-17.55	-	-	-	-	142	201	H
3	* 4.949	44.17	PK1	34.1	-29.7	48.57	-	-	74	-25.43	-	-	141	298	H
	* 4.949	35.89	AD1	34.1	-29.7	40.29	54	-13.71	-	-	-	-	141	298	H
4	* 4.949	46.52	PK1	34.1	-29.7	50.92	-	-	74	-23.08	-	-	270	349	V
	* 4.949	40.32	AD1	34.1	-29.7	44.72	54	-9.28	-	-	-	-	270	349	V
5	5.873	43.5	PK1	34.9	-20.5	57.9	-	-	-	-	68.2	-10.3	244	325	V
6	6.083	42.76	PK1	35.2	-20.2	57.76	-	-	-	-	68.2	-10.44	199	382	H


* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

9.18. 802.11ac VHT80 1TX SISO MODE IN THE 5.6 GHz BAND

RESTRICTED BANDEGE (LOW CHANNEL)

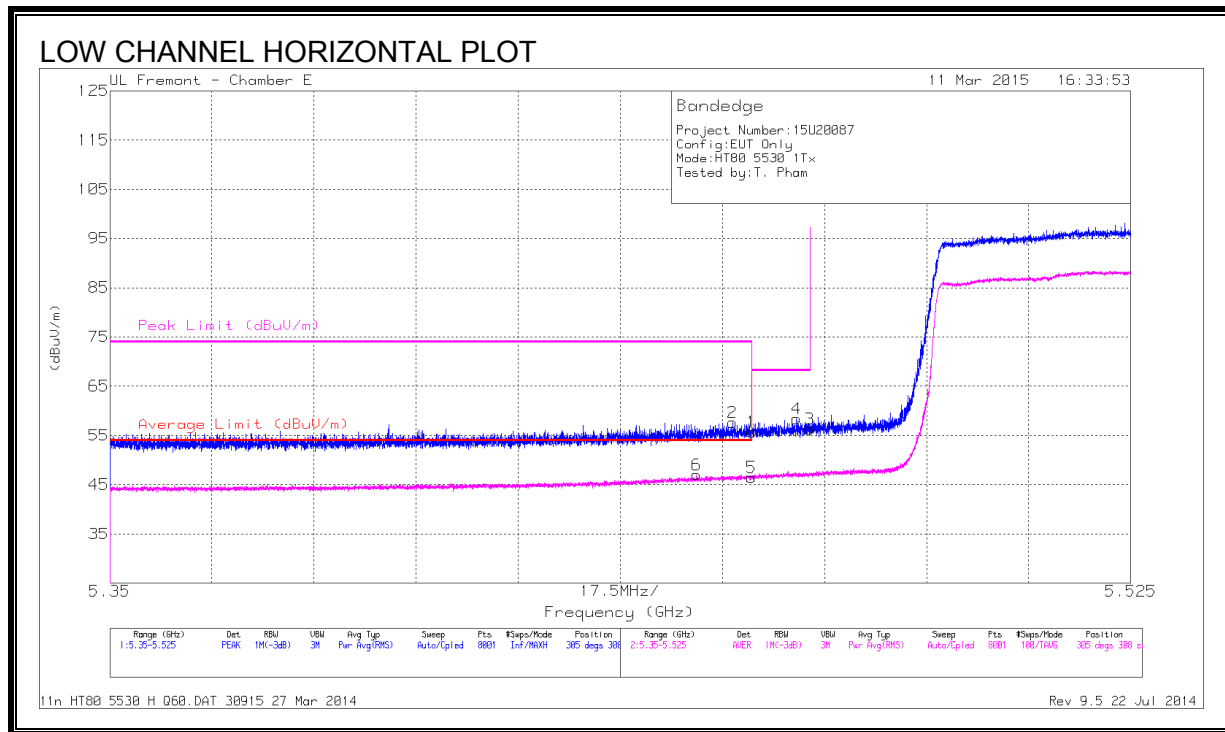


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	41.94	PK	34.6	-20.8	0	55.74	-	-	74	-18.26	305	308	H
2	* 5.457	43.83	PK	34.6	-20.8	0	57.63	-	-	74	-16.37	305	308	H
5	* 5.46	32.66	RMS	34.6	-20.8	.16	46.62	54	-7.38	-	-	305	308	H
6	* 5.451	33.32	RMS	34.6	-20.9	.16	47.18	54	-6.72	-	-	305	308	H
4	5.468	44.63	PK	34.6	-20.8	0	58.43	-	-	68.2	-9.77	305	308	H
3	5.47	42.53	PK	34.6	-20.8	0	56.33	-	-	68.2	-11.87	305	308	H

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

RMS - RMS detection


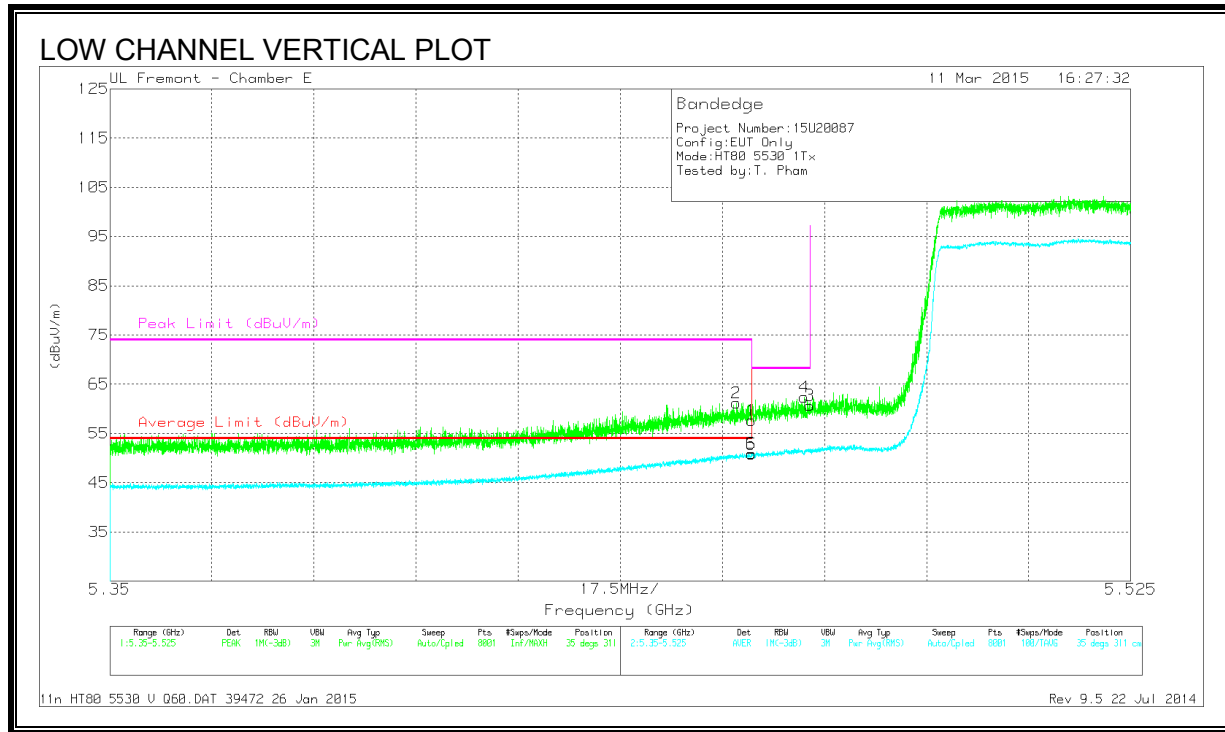


DATA

Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	43.89	PK	34.6	-20.8	0	57.69	-	-	74	-16.31	35	311	V
2	* 5.457	47.39	PK	34.6	-20.8	0	61.19	-	-	74	-12.81	35	311	V
5	* 5.46	36.98	RMS	34.6	-20.8	.16	50.94	54	-3.06	-	-	35	311	V
6	* 5.46	37.15	RMS	34.6	-20.8	.16	51.11	54	-2.89	-	-	35	311	V
4	5.469	48.63	PK	34.6	-20.8	0	62.43	-	-	68.2	-5.77	35	311	V
3	5.47	46.89	PK	34.6	-20.8	0	60.69	-	-	68.2	-7.51	35	311	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.
PK - Peak detector
RMS - RMS detection

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

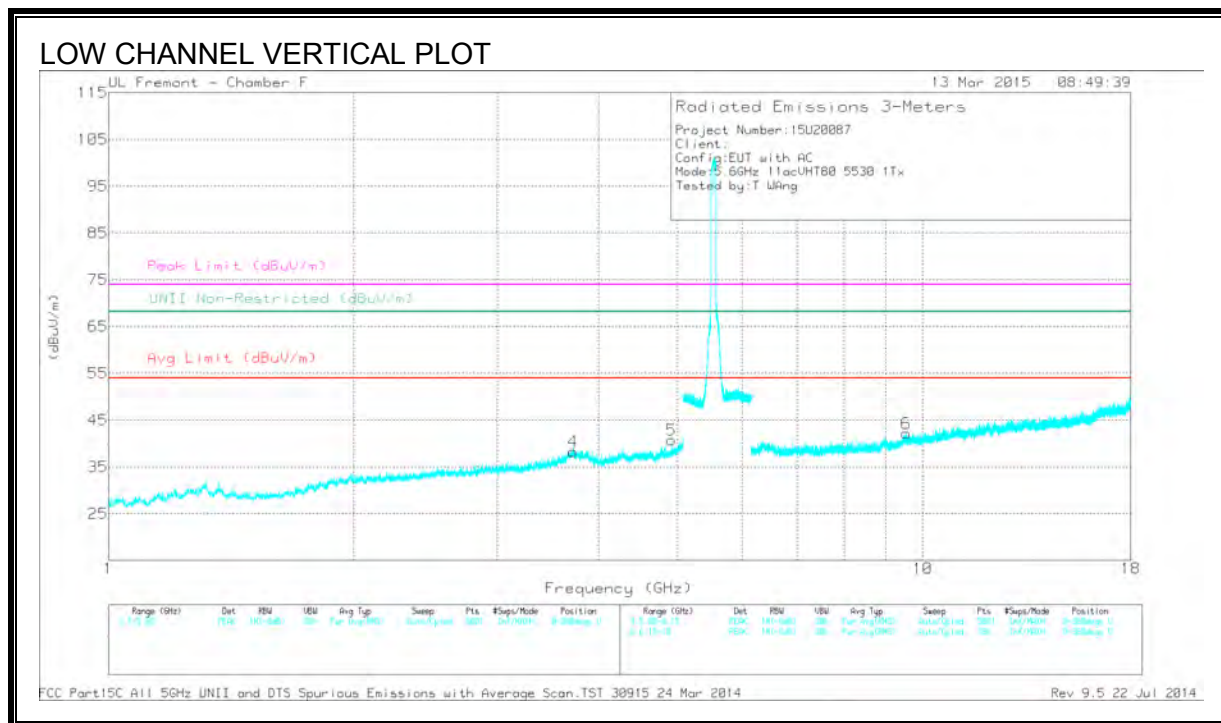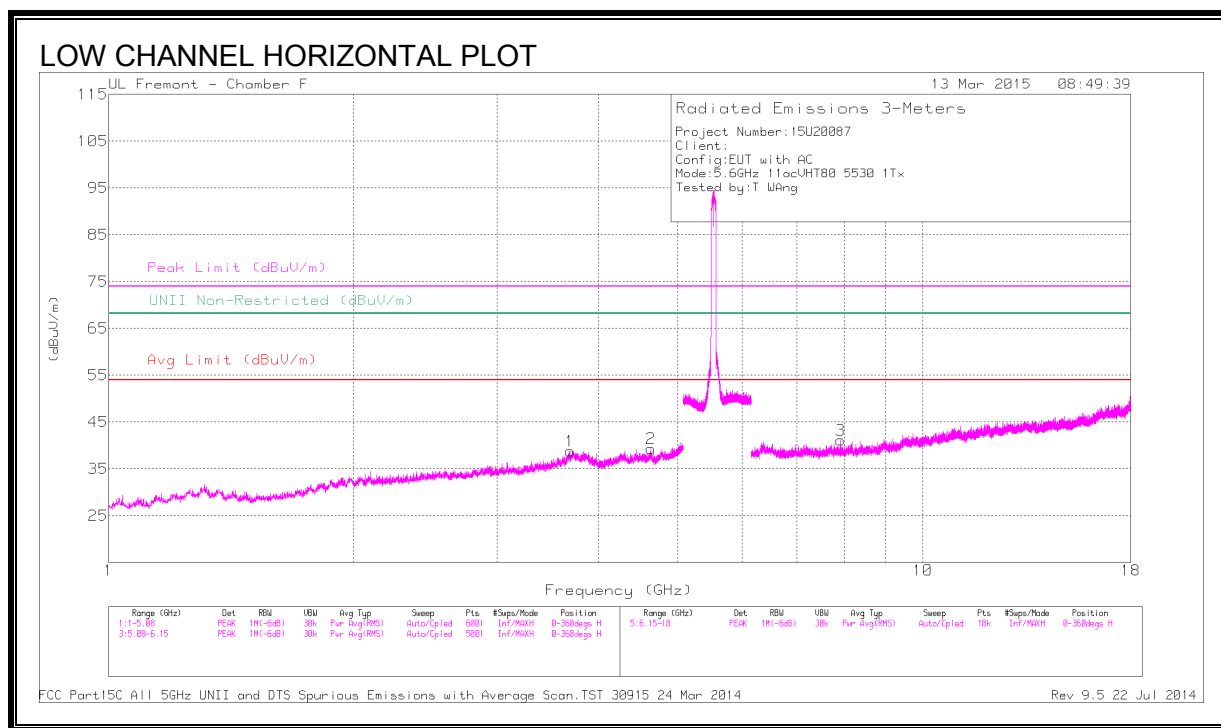

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.687	39.29	PK1	34.9	-28.7	0	45.49	-	-	74	-28.51	-	-	180	192	H
	* 3.687	29.1	AD1	34.9	-28.7	.16	35.3	54	-18.7	-	-	-	-	180	192	H
2	* 4.637	37.69	PK1	34.1	-26.6	0	45.19	-	-	74	-28.81	-	-	180	192	H
	* 4.638	26.58	AD1	34.1	-26.6	.16	34.08	54	-19.92	-	-	-	-	180	192	H
4	* 3.716	39.12	PK1	34.8	-28.9	0	45.02	-	-	74	-28.98	-	-	290	257	V
	* 3.716	27.33	AD1	34.8	-28.9	.16	33.23	54	-20.77	-	-	-	-	290	257	V
5	* 4.915	38.48	PK1	34.2	-27	0	45.68	-	-	74	-28.32	-	-	290	257	V
	* 4.916	27.39	AD1	34.2	-27	.16	34.59	54	-19.41	-	-	-	-	290	257	V
3	7.92	36.66	PK1	35.7	-25.4	0	46.96	-	-	-	-	68.2	-21.24	180	192	H
6	9.536	33.68	PK1	36.9	-21.5	0	49.08	-	-	-	-	68.2	-19.12	290	257	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS

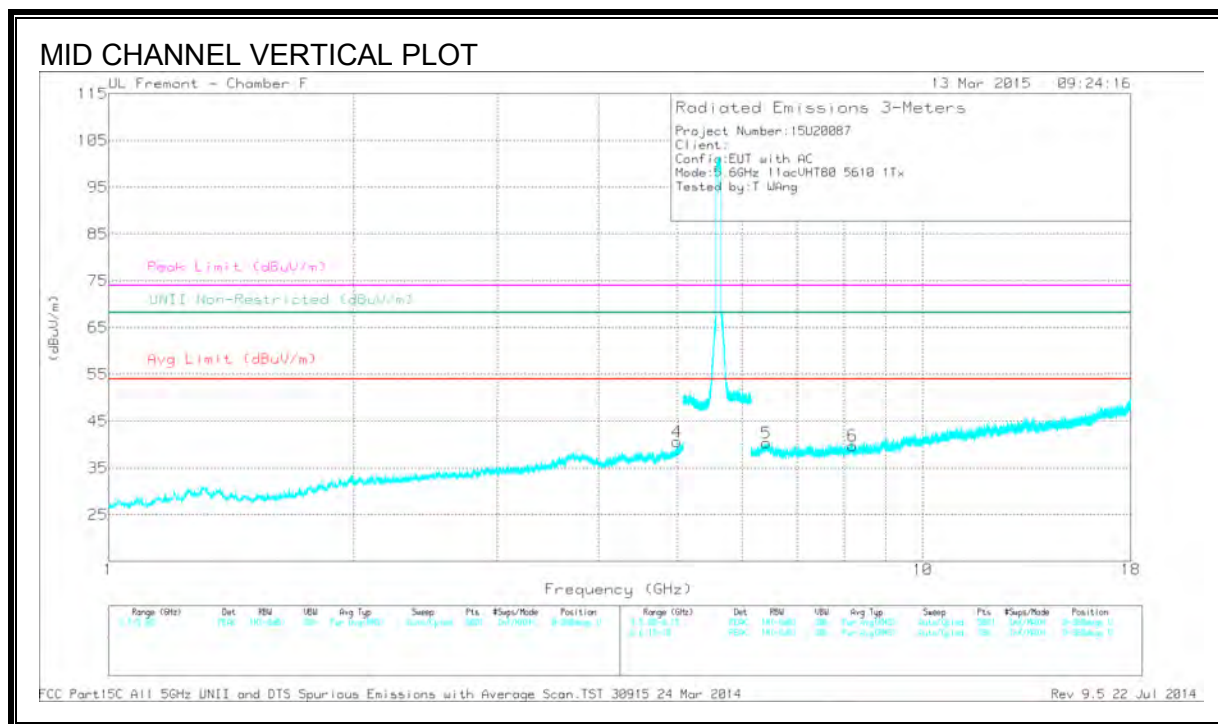
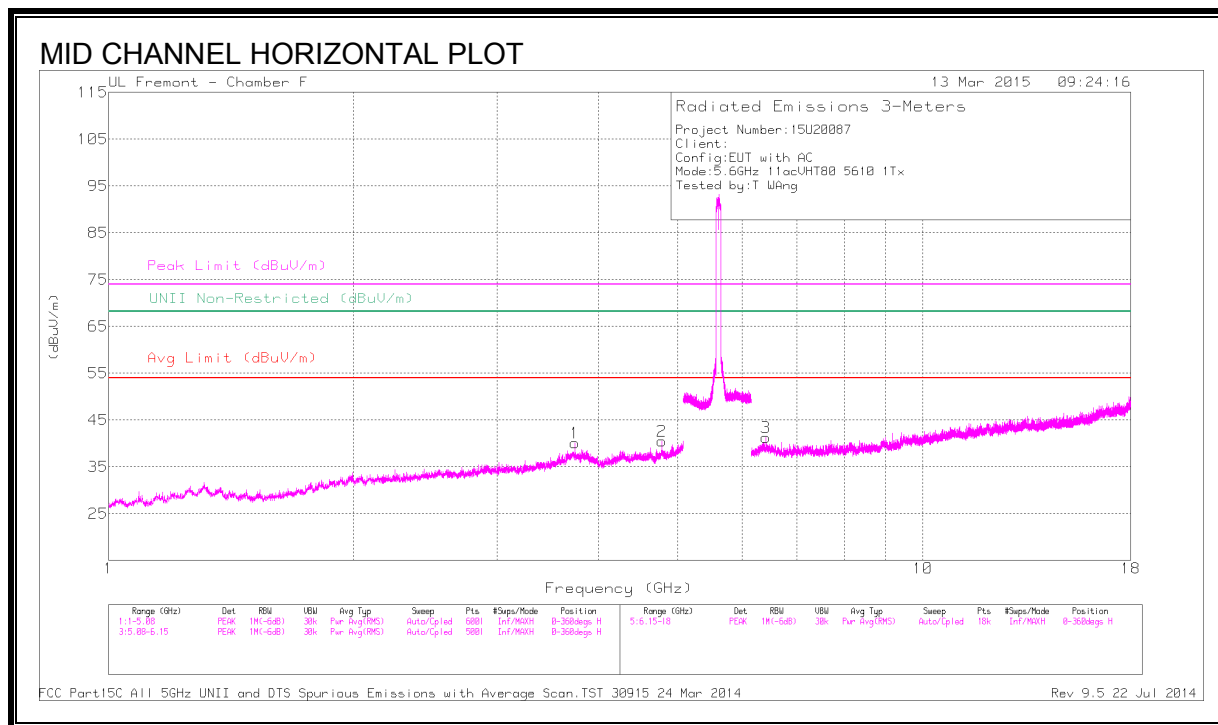


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.74	40.53	PK1	34.7	-29.4	0	45.83	-	-	74	-28.17	-	-	180	222	H
	* 3.74	31.66	AD1	34.7	-29.4	.16	36.96	54	-17.04	-	-	-	-	180	222	H
2	* 4.78	41.56	PK1	34.1	-27.4	0	48.26	-	-	74	-25.74	-	-	180	222	H
	* 4.779	27.81	AD1	34.1	-27.4	.16	34.51	54	-19.49	-	-	-	-	180	222	H
4	* 4.987	40.31	PK1	34.2	-26.7	0	47.81	-	-	74	-26.19	-	-	58	157	V
	* 4.987	30.91	AD1	34.2	-26.7	.16	38.41	54	-15.59	-	-	-	-	58	157	V
3	6.418	37.76	PK1	35.6	-26.6	0	46.76	-	-	-	-	68.2	-21.44	180	222	H
6	* 8.199	35.98	PK1	35.8	-24.5	0	47.28	-	-	74	-26.72	-	-	58	157	V
	* 8.199	24.91	AD1	35.8	-24.5	.16	36.21	54	-17.79	-	-	-	-	58	157	V
5	6.428	38.38	PK1	35.6	-26.8	0	47.18	-	-	-	-	68.2	-21.02	58	157	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.
PK1 - KDB789033 Method: Peak
AD1 - KDB789033 Method: AD Primary Power Average

CHANNEL 138 HARMONICS AND SPURIOUS EMISSIONS

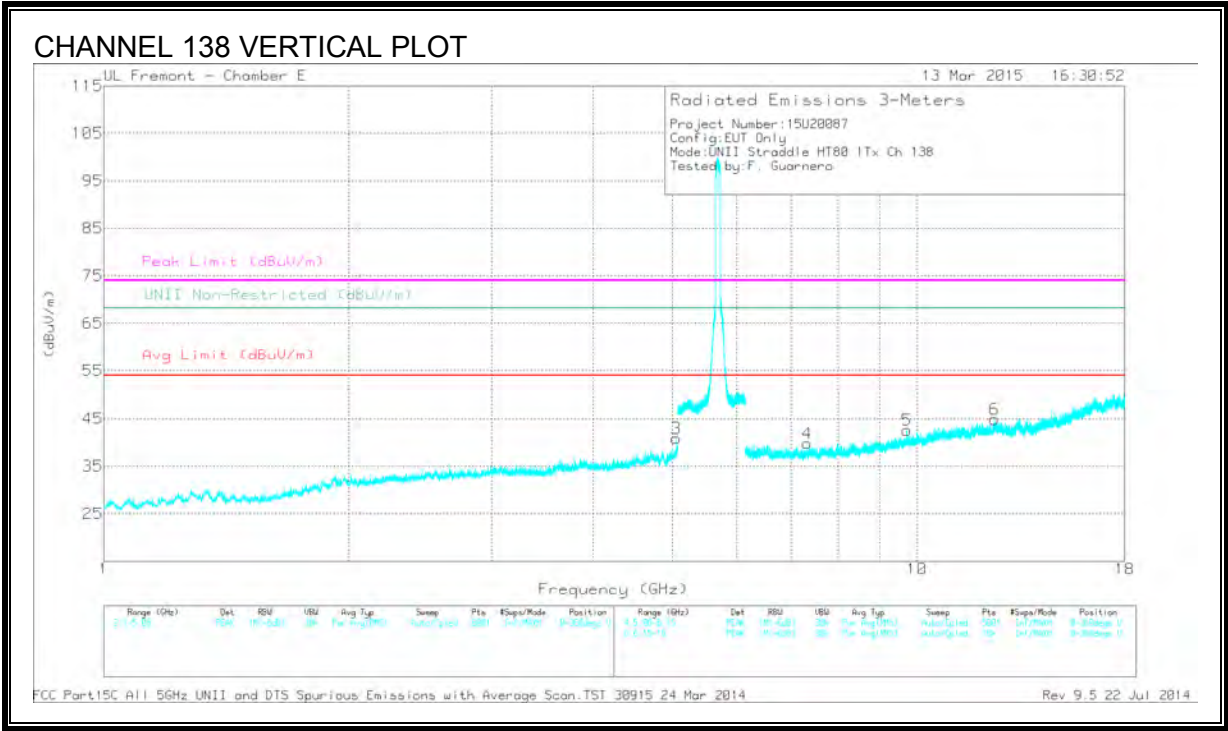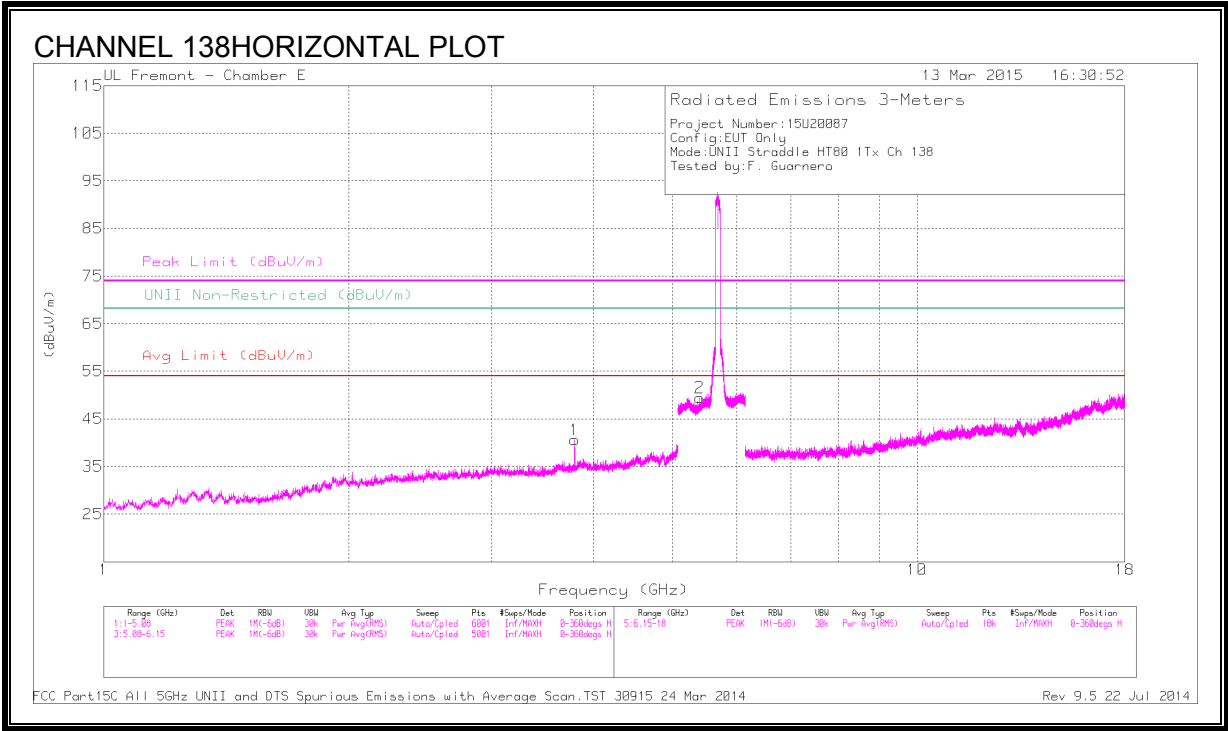

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.793	45.84	PK1	33.5	-32.1	0	47.24	-	-	74	-26.76	-	-	344	139	H
	* 3.793	38.18	AD1	33.5	-32.1	.16	39.75	54	-14.25	-	-	-	-	344	139	H
3	* 5.058	42.92	PK1	34.2	-28.3	0	48.82	-	-	74	-25.18	-	-	258	136	V
	* 5.058	34.26	AD1	34.2	-28.3	.16	40.33	54	-13.67	-	-	-	-	258	136	V
2	* 5.406	42.63	PK1	34.6	-21.1	0	56.13	-	-	74	-17.87	-	-	306	204	H
	* 5.407	31.31	AD1	34.6	-21.1	.16	44.98	54	-9.02	-	-	-	-	306	204	H
4	* 7.323	39.11	PK1	35.5	-27.8	0	46.81	-	-	74	-27.19	-	-	109	358	V
	* 7.323	27.12	AD1	35.5	-27.8	.16	34.99	54	-19.01	-	-	-	-	109	358	V
6	* 12.454	36.09	PK1	38.9	-23.6	0	51.39	-	-	74	-22.61	-	-	179	364	V
	* 12.455	25.16	AD1	38.9	-23.6	.16	40.63	54	-13.37	-	-	-	-	179	364	V
5	9.718	37.17	PK1	37	-24.8	0	49.37	-	-	-	-	68.2	-18.83	4	129	V


* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

9.19. 802.11ac VHT80 2TX CDD MODE IN THE 5.6 GHz BAND

RESTRICTED BANDEGE (LOW CHANNEL)

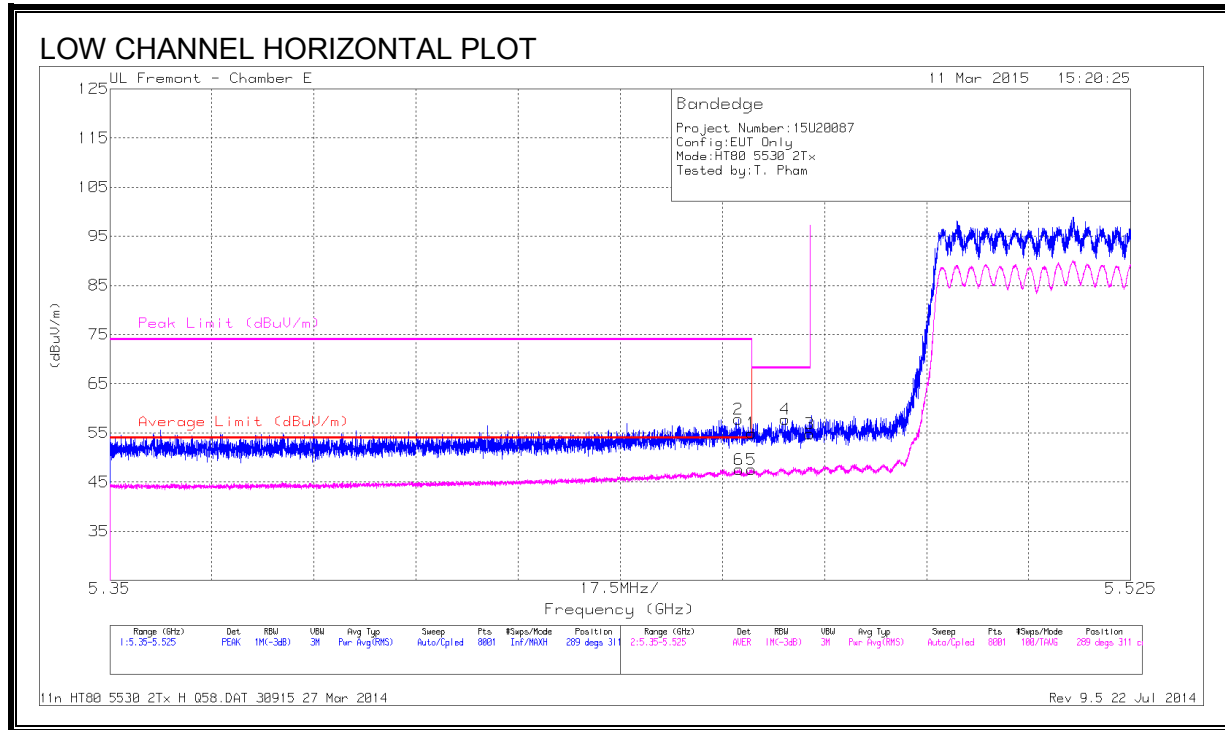


DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	41.14	PK	34.6	-20.8	0	54.94	-	-	74	-19.06	289	311	H
2	* 5.458	44.02	PK	34.6	-20.8	0	57.82	-	-	74	-16.18	289	311	H
5	* 5.46	33.76	RMS	34.6	-20.8	.22	47.78	54	-6.22	-	-	289	311	H
6	* 5.458	33.76	RMS	34.6	-20.8	.22	47.78	54	-6.22	-	-	289	311	H
4	5.466	43.96	PK	34.6	-20.8	0	57.76	-	-	68.2	-10.44	289	311	H
3	5.47	41.02	PK	34.6	-20.8	0	54.82	-	-	68.2	-13.38	289	311	H

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

RMS - RMS detection

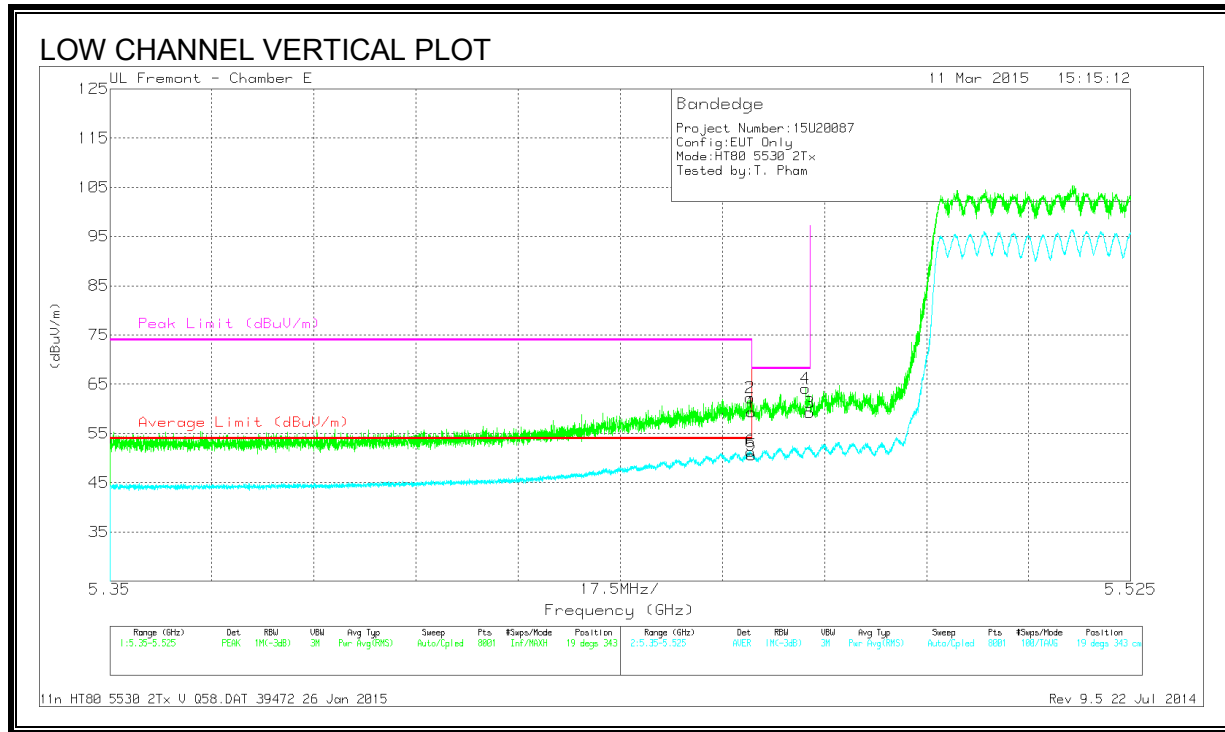

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	45.55	PK	34.6	-20.8	0	59.35	-	-	74	-14.65	19	343	V
2	* 5.46	48.47	PK	34.6	-20.8	0	62.27	-	-	74	-11.73	19	343	V
5	* 5.46	36.82	RMS	34.6	-20.8	.22	50.84	54	-3.16	-	-	19	343	V
6	* 5.46	37.55	RMS	34.6	-20.8	.22	51.47	54	-2.53	-	-	19	343	V
4	5.469	50.34	PK	34.6	-20.8	0	64.14	-	-	68.2	-4.06	19	343	V
3	5.47	45.46	PK	34.6	-20.8	0	59.26	-	-	68.2	-8.94	19	343	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

RMS - RMS detection

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

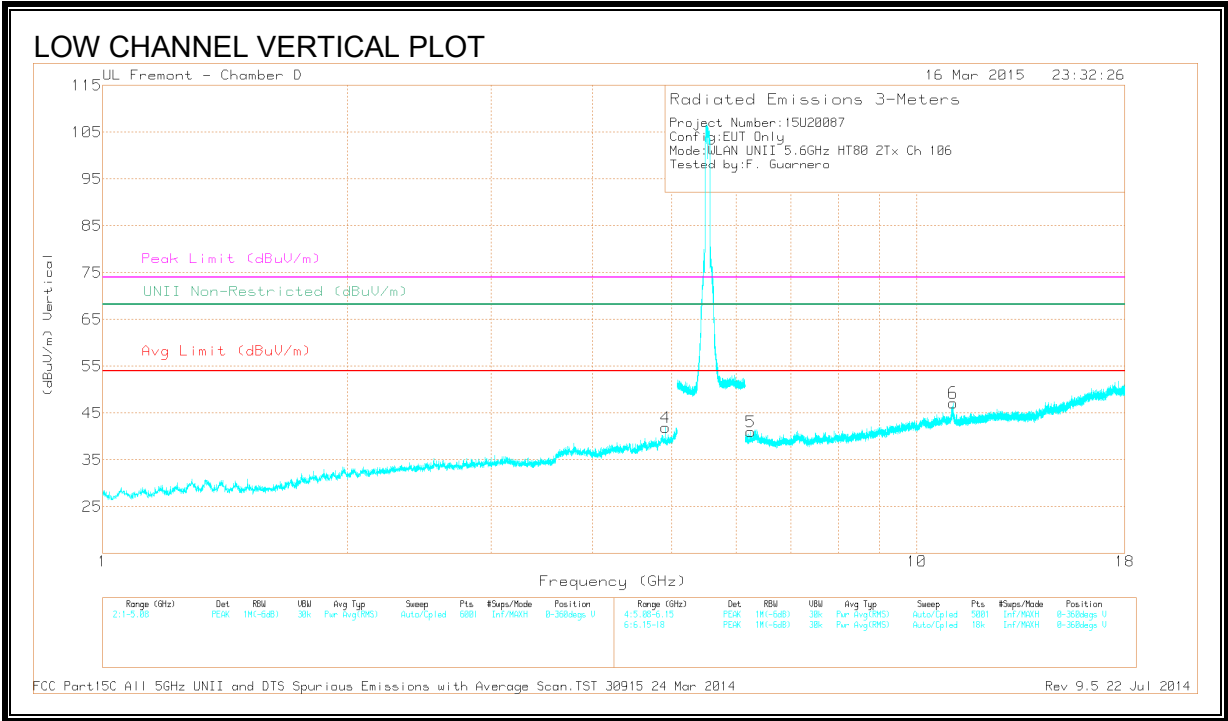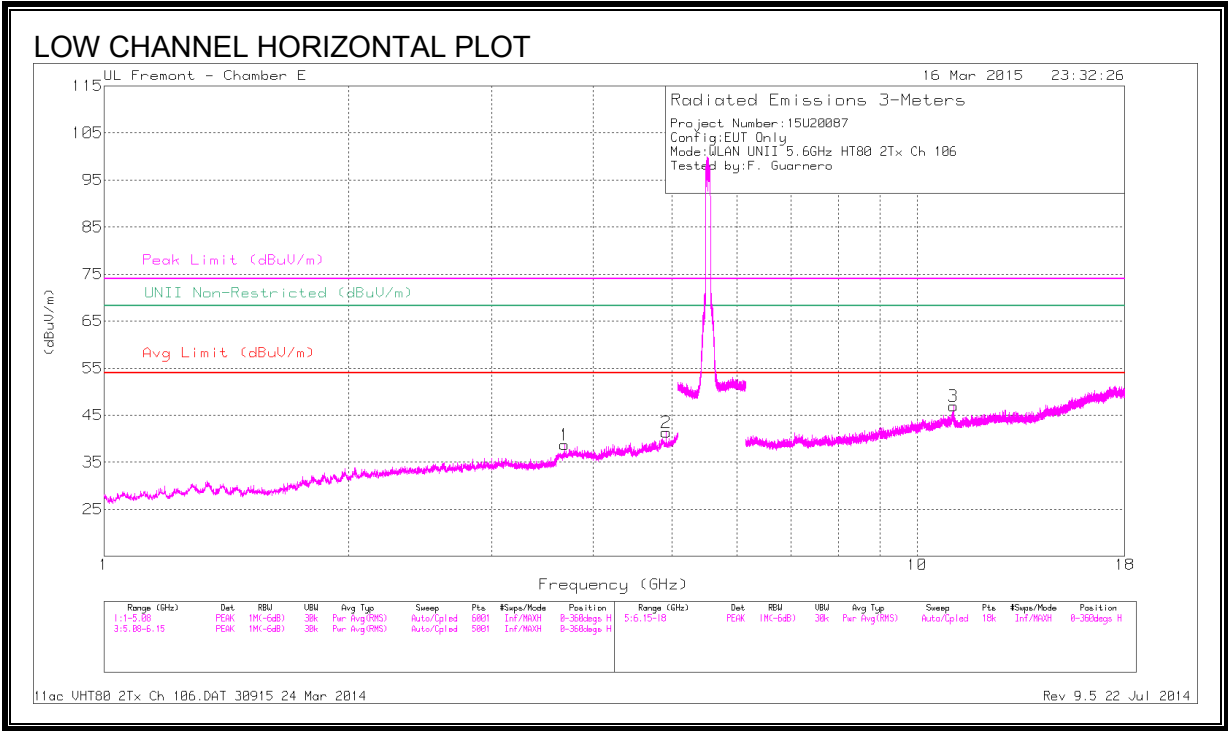

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.686	40.56	PK1	33.2	-29.2	0	44.56	-	-	74	-29.44	-	-	57	199	H
	* 3.687	30.82	AD1	33.2	-29.2	.22	35.03	54	-18.97	-	-	-	-	57	199	H
2	* 4.916	39.32	PK1	34.1	-26.4	0	47.02	-	-	74	-26.98	-	-	244	294	H
	* 4.916	30.43	AD1	34.1	-26.4	.22	38.34	54	-15.66	-	-	-	-	244	294	H
4	* 4.916	41.55	PK1	34.1	-26.4	0	49.25	-	-	74	-24.75	-	-	331	358	V
	* 4.916	33.16	AD1	34.1	-26.4	.22	41.07	54	-12.93	-	-	-	-	331	358	V
3	* 11.078	37.74	PK1	38	-21.5	0	54.24	-	-	74	-19.76	-	-	303	160	H
	* 11.081	26.01	AD1	38	-21.5	.22	42.72	54	-11.28	-	-	-	-	303	160	H
6	* 11.081	36.79	PK1	38	-21.5	0	53.29	-	-	74	-20.71	-	-	354	214	V
	* 11.071	25.61	AD1	38	-21.4	.22	42.42	54	-11.58	-	-	-	-	354	214	V
5	6.253	38.52	PK1	35.4	-26.6	0	47.32	-	-	-	-	68.2	-20.88	303	130	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS

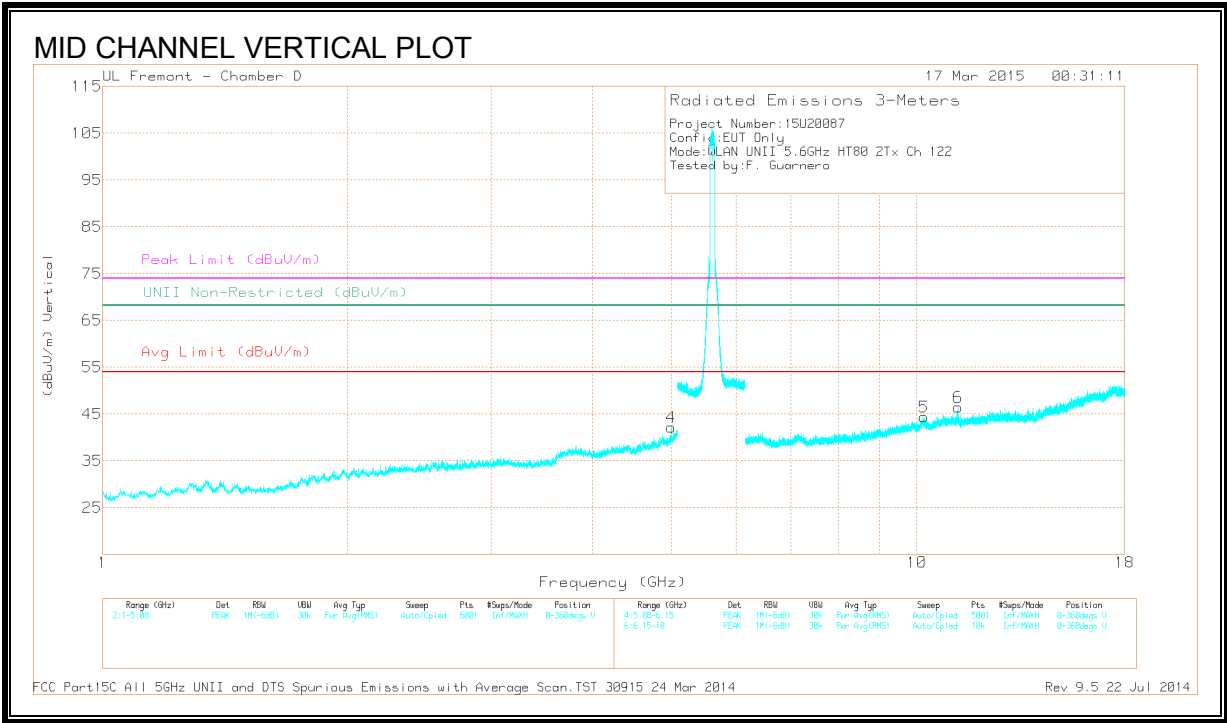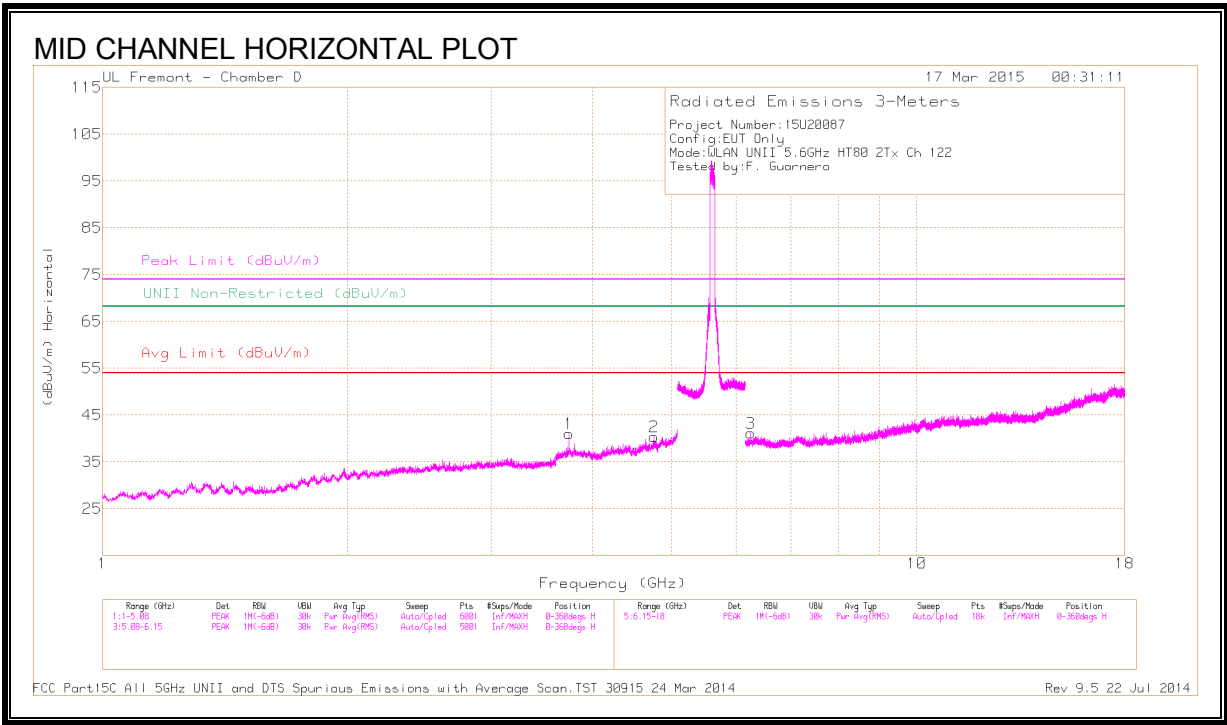

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.74	41.55	PK1	33.3	-29.1	0	45.75	-	-	74	-28.25	-	-	43	225	H
	* 3.74	33.23	AD1	33.3	-29.1	.22	37.64	54	-16.36	-	-	-	-	43	225	H
2	* 4.756	38.14	PK1	34.1	-27.6	0	44.64	-	-	74	-29.36	-	-	58	100	H
	* 4.758	26.96	AD1	34.1	-27.6	.22	33.67	54	-20.33	-	-	-	-	58	100	H
4	* 4.987	41.51	PK1	34.2	-26.9	0	48.81	-	-	74	-25.19	-	-	324	316	V
	* 4.987	32.84	AD1	34.2	-26.9	.22	40.35	54	-13.65	-	-	-	-	324	316	V
6	* 11.239	38.4	PK1	38	-21.9	0	54.5	-	-	74	-19.5	-	-	19	107	V
	* 11.229	25.25	AD1	38	-21.9	.22	41.56	54	-12.44	-	-	-	-	19	107	V
3	6.252	38.56	PK1	35.4	-26.7	0	47.26	-	-	-	-	68.2	-20.94	85	104	H
5	10.206	34.1	PK1	37.2	-21.1	0	50.2	-	-	-	-	68.2	-18	178	317	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

CHANNEL 138 HARMONICS AND SPURIOUS EMISSIONS

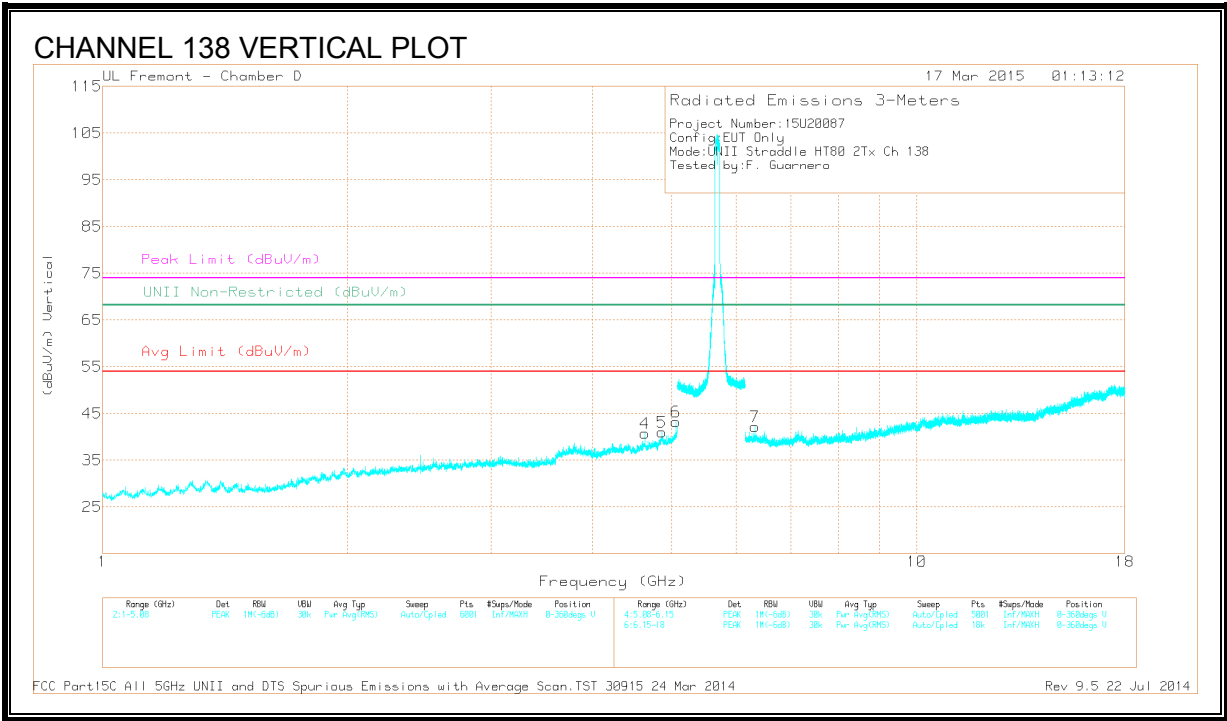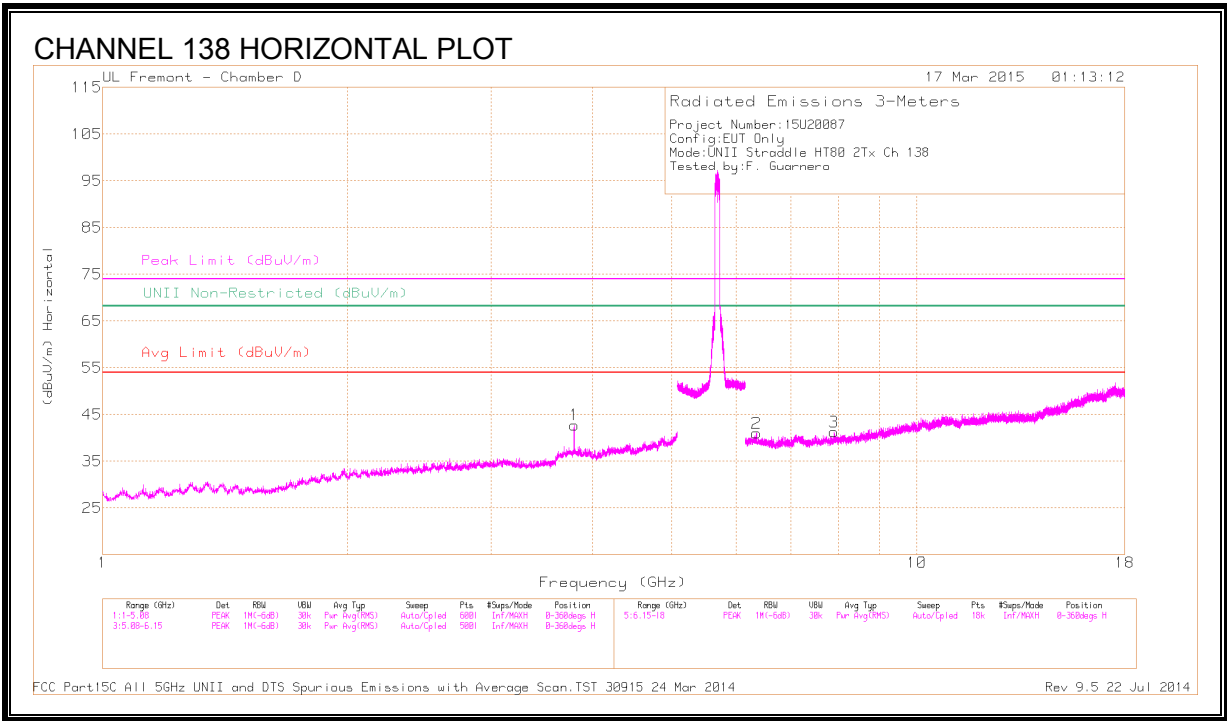

DATA

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T344 (dBm)	Amp/CbI/F Itr/Pad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non- Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.793	42.21	PK1	33.3	-28.7	0	46.81	-	-	74	-27.19	-	-	58	246	H
	* 3.793	35.62	AD1	33.3	-28.7	.22	40.43	54	-13.57	-	-	-	-	58	246	H
4	* 4.636	40.08	PK1	34.1	-27.1	0	47.08	-	-	74	-26.92	-	-	338	100	V
	* 4.636	31.18	AD1	34.1	-27.1	.22	38.39	54	-15.61	-	-	-	-	338	100	V
5	* 4.861	38	PK1	34.1	-25.5	0	46.6	-	-	74	-27.4	-	-	353	328	V
	* 4.861	26.62	AD1	34.1	-25.4	.22	35.53	54	-18.47	-	-	-	-	353	328	V
6	* 5.058	42.28	PK1	34.3	-25.9	0	50.68	-	-	74	-23.32	-	-	330	305	V
	* 5.058	34.3	AD1	34.3	-25.9	.22	42.91	54	-11.09	-	-	-	-	330	305	V
7	6.322	39.36	PK1	35.4	-25.8	0	48.96	-	-	-	-	68.2	-19.24	298	164	V
2	6.353	37.06	PK1	35.4	-25.9	0	46.56	-	-	-	-	68.2	-21.64	266	212	H
3	7.915	35.65	PK1	35.7	-24.4	0	46.95	-	-	-	-	68.2	-21.25	199	396	H


* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

9.20. 802.11n HT20 1Tx SISO MODE IN THE 5.8 GHz BAND


RESTRICTED BANDEGE (LOW CHANNEL)

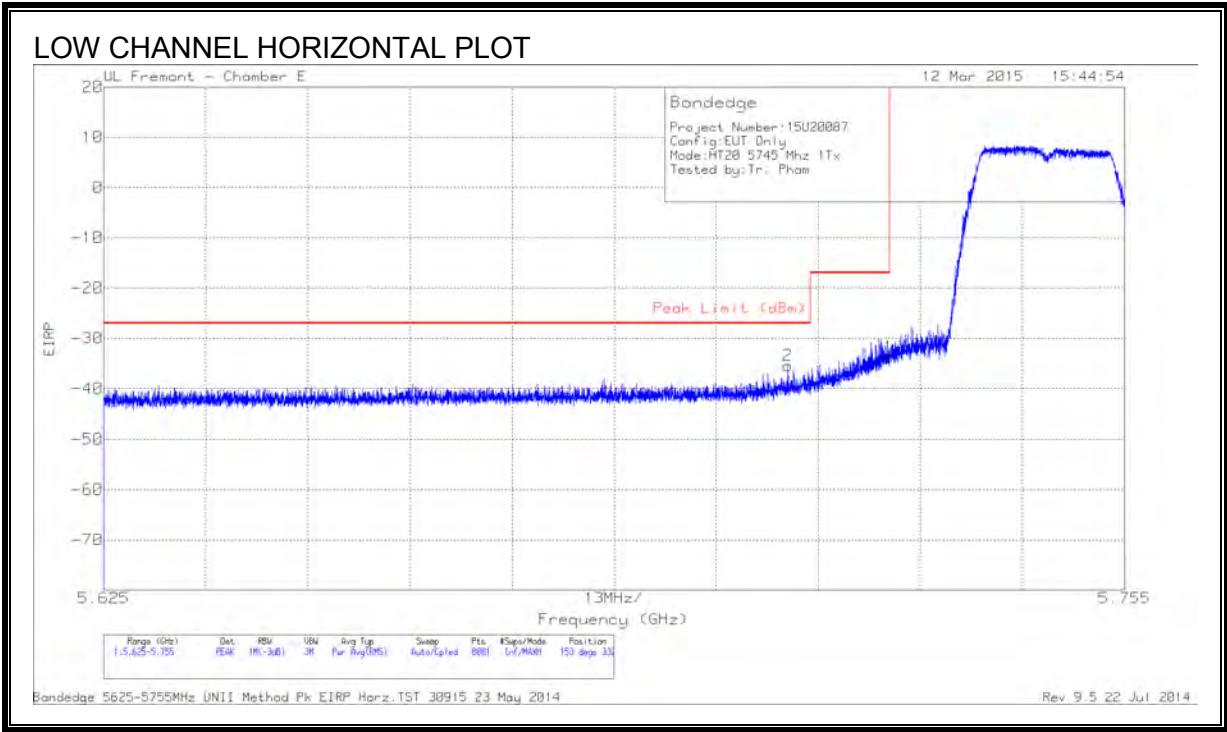

DATA

Marker	Frequenc y (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Conversi on Factor (dB)	Correcte d Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.712	-60.94	PK	34.7	-21	11.8	-35.44	-27	-8.44	153	332	H
1	5.725	-59.47	PK	34.7	-20.8	11.8	-33.77	-17	-16.77	153	332	H

PK - Peak detector

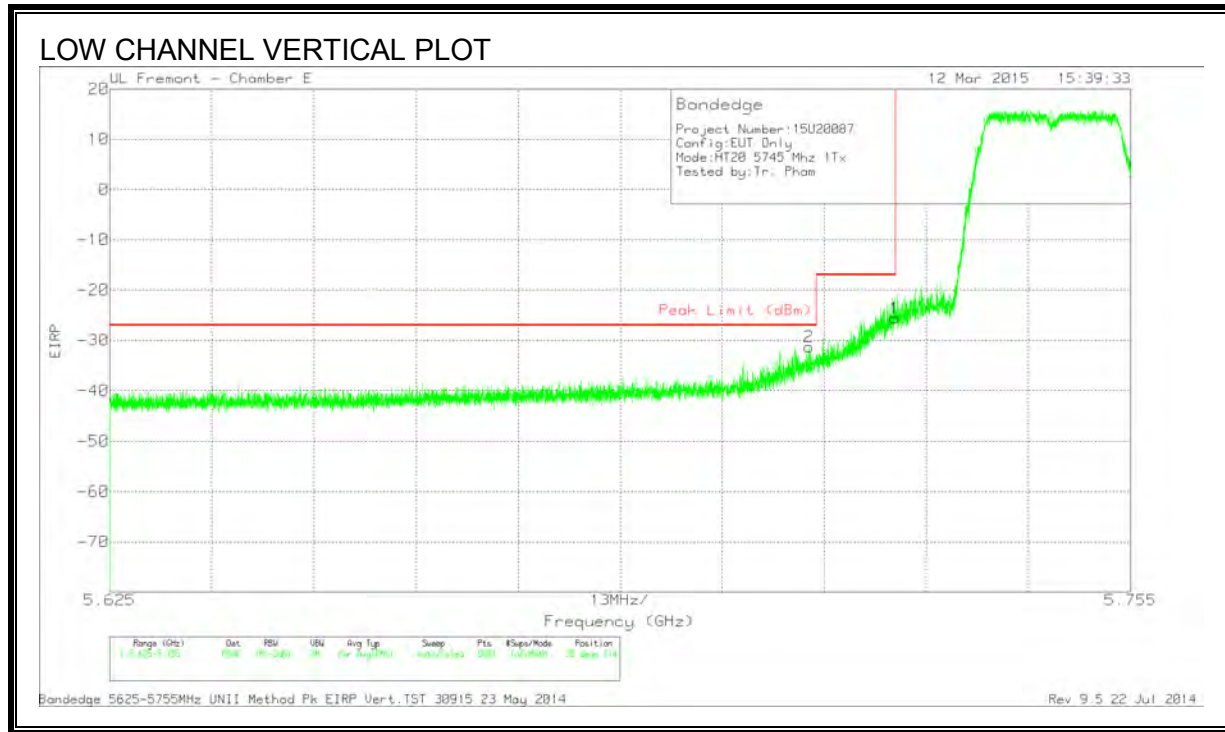


DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T346 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.714	-56.82	PK	34.7	-21	11.8	-31.32	-27	-4.32	35	214	V
1	5.725	-51.29	PK	34.7	-20.8	11.8	-25.59	-17	-8.59	35	214	V

PK - Peak detector

RESTRICTED BANDEDGE (HIGH CHANNEL)

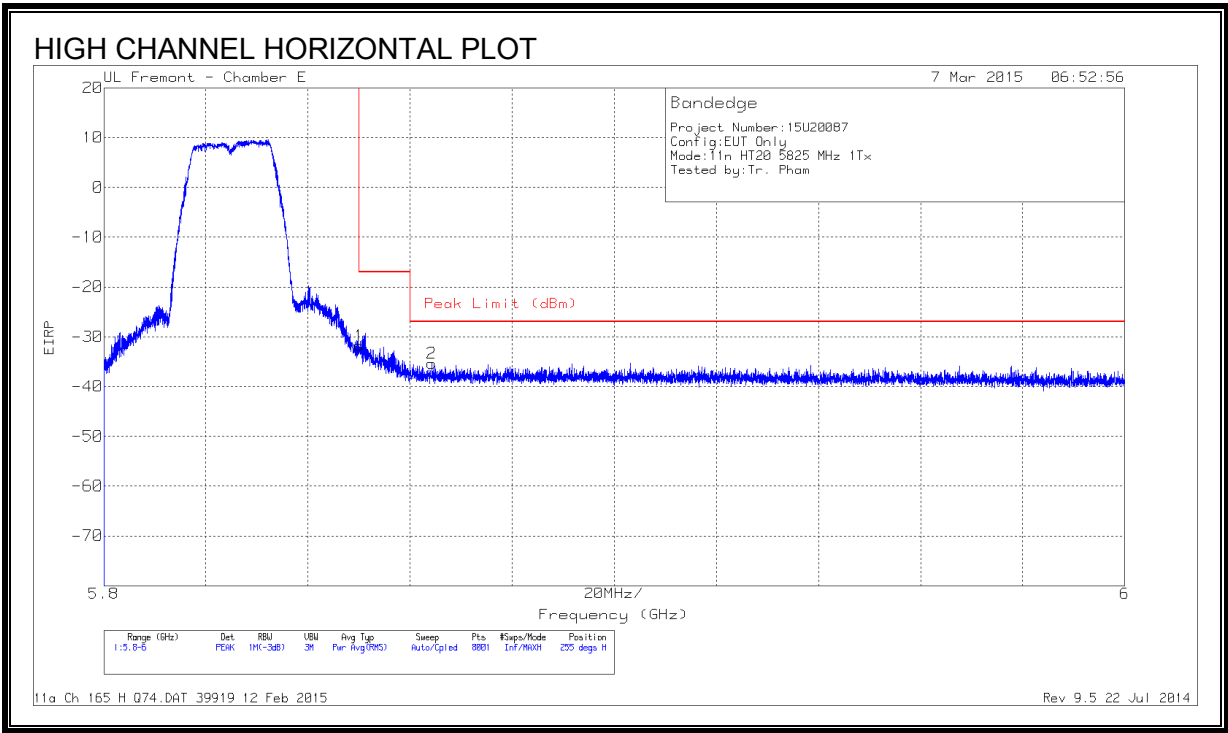


DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AFT344 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-60.74	PK	34.9	-17.7	11.8	-31.74	-17	-14.74	255	299	H
2	5.864	-64.56	PK	35	-17.6	11.8	-35.36	-27	-8.36	255	299	H

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

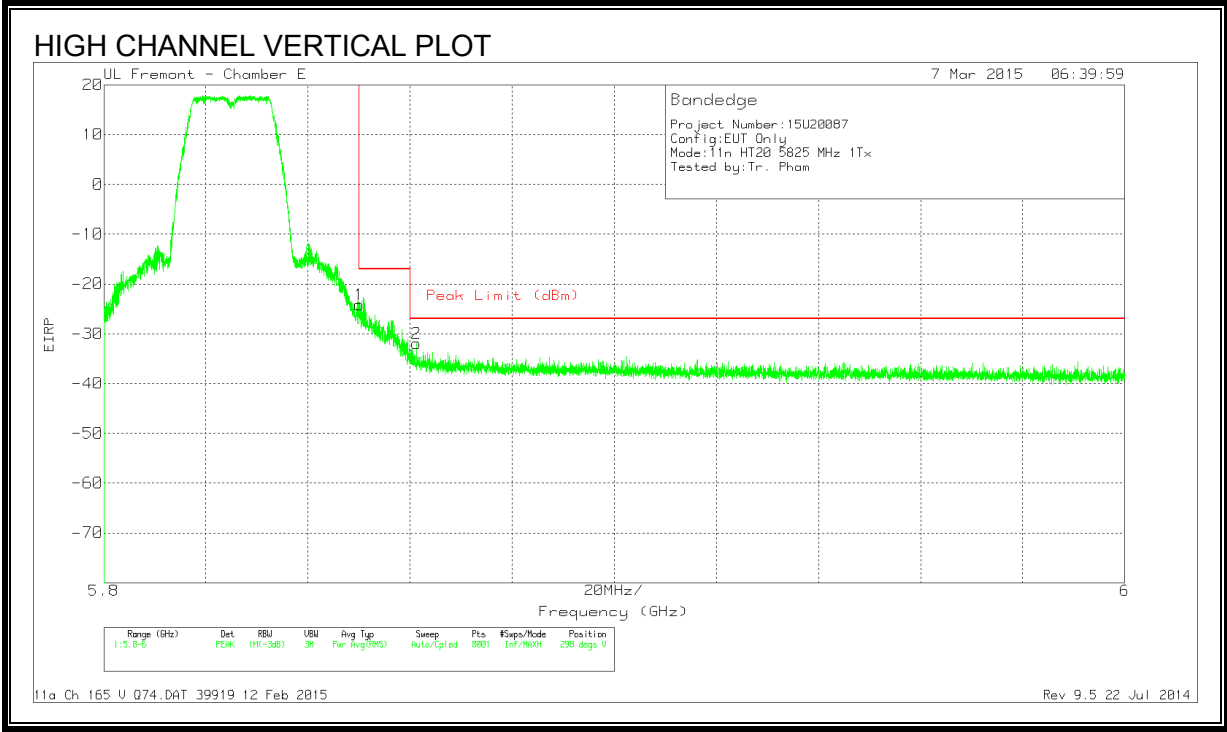



DATA

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T344 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-53.15	PK	34.9	-17.7	11.8	-24.15	-17	-7.15	298	152	V
2	5.861	-61.16	PK	35	-17.6	11.8	-31.96	-27	-4.96	298	152	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

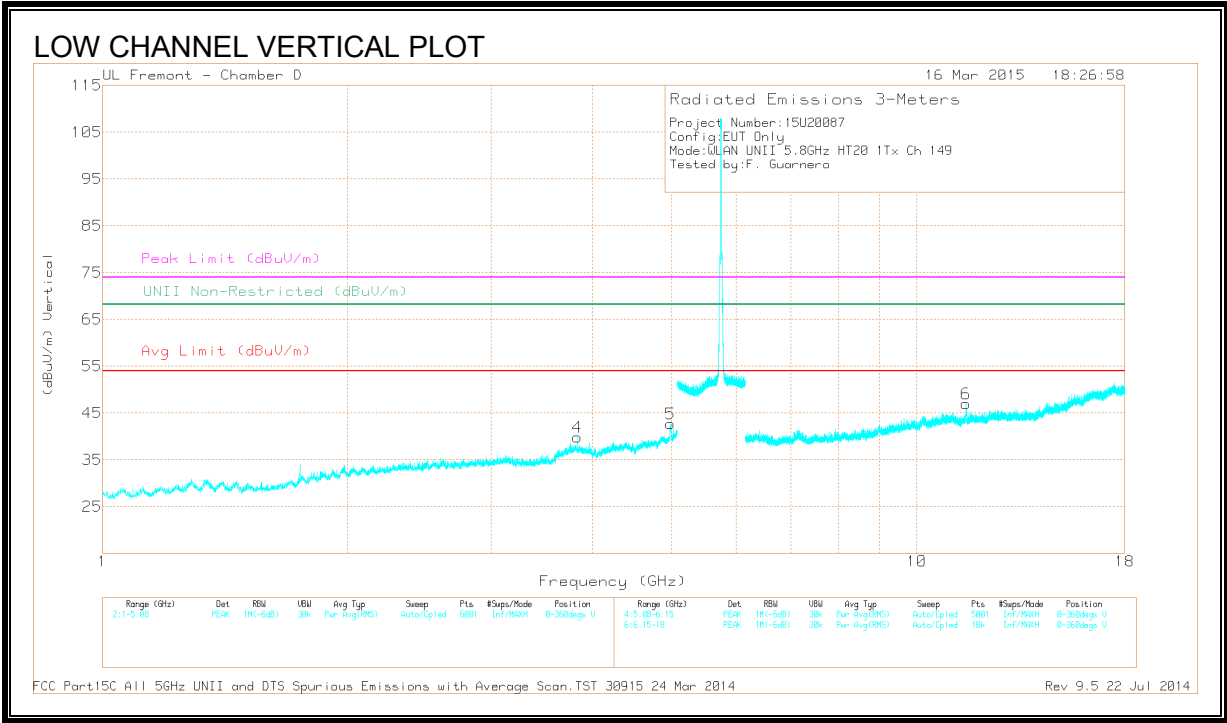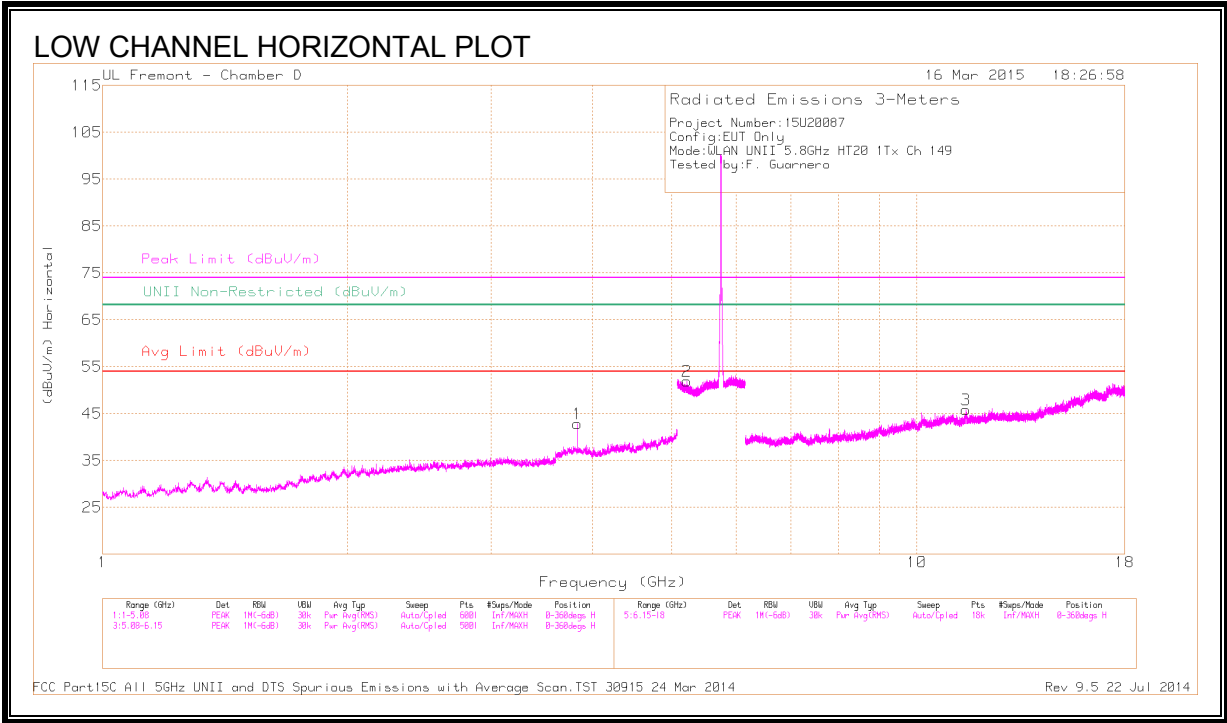

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.83	43.21	PK1	33.4	-28.8	47.81	-	-	74	-26.19	-	-	43	316	H
	* 3.83	36.75	AD1	33.4	-28.8	41.35	54	-12.65	-	-	-	-	43	316	H
4	* 3.83	40.88	PK1	33.4	-28.8	45.48	-	-	74	-28.52	-	-	0	314	V
	* 3.83	32.8	AD1	33.4	-28.8	37.4	54	-16.6	-	-	-	-	0	314	V
5	* 4.979	43.24	PK1	34.2	-26.9	50.54	-	-	74	-23.46	-	-	334	217	V
	* 4.979	32.11	AD1	34.2	-26.9	39.41	54	-14.59	-	-	-	-	334	217	V
3	* 11.493	37.83	PK1	38.1	-21.8	54.13	-	-	74	-19.87	-	-	284	185	H
	* 11.49	25.58	AD1	38.1	-21.8	41.88	54	-12.12	-	-	-	-	284	185	H
6	* 11.494	37.97	PK1	38.1	-21.8	54.27	-	-	74	-19.73	-	-	5	109	V
	* 11.49	26.21	AD1	38.1	-21.8	42.51	54	-11.49	-	-	-	-	5	109	V
2	5.216	41.62	PK1	34.3	-18.2	57.72	-	-	-	-	68.2	-10.48	15	400	H

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

MID CHANNEL HARMONICS AND SPURIOUS EMISSIONS

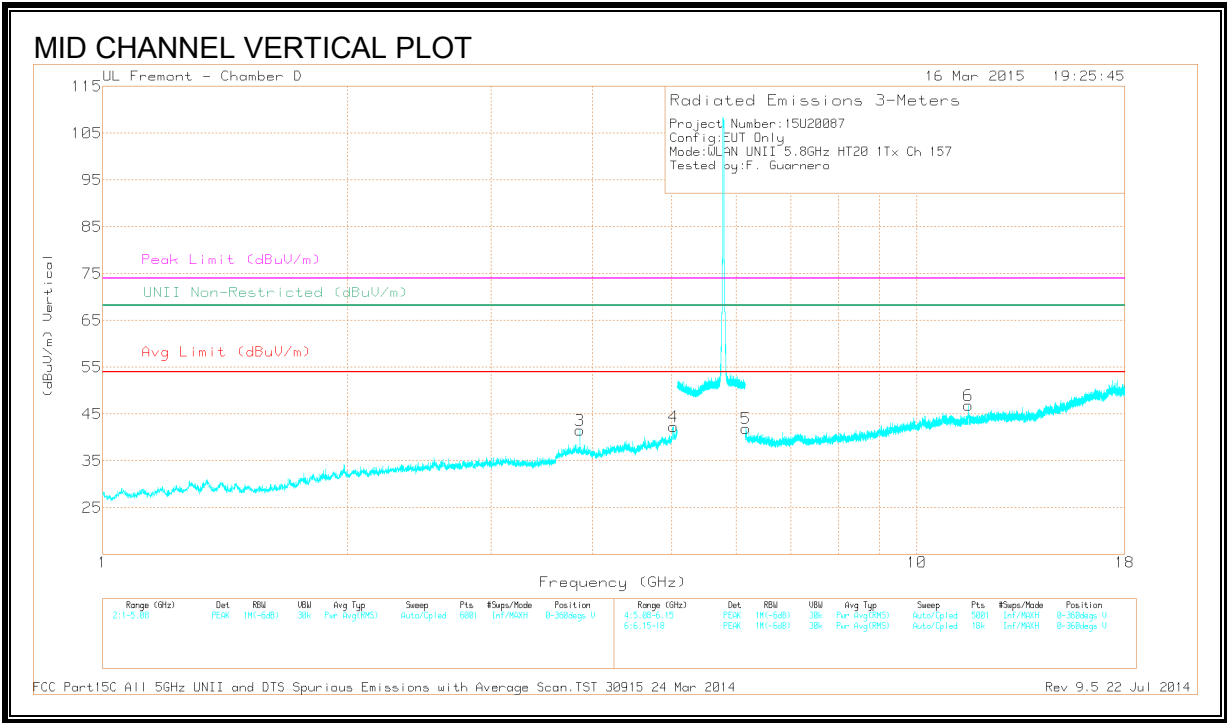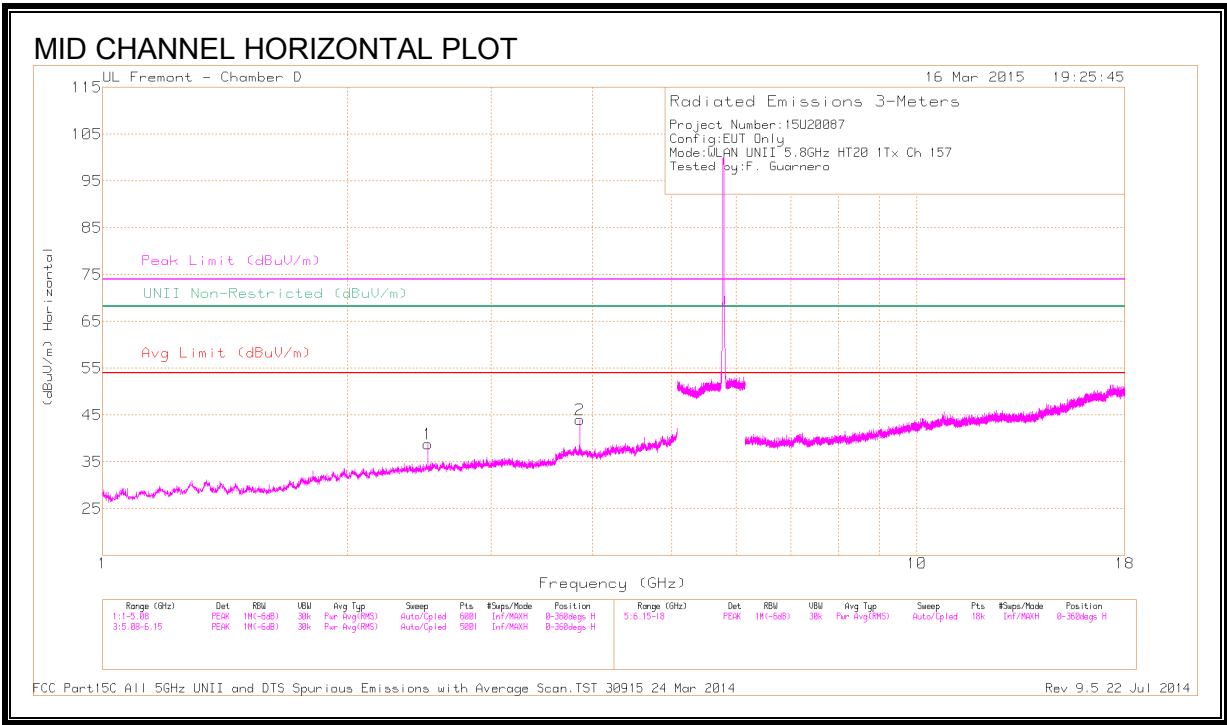

DATA

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/F lter/Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non- Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 3.857	44.4	PK1	33.4	-29	48.8	-	-	74	-25.2	-	-	61	242	H
	* 3.857	39.25	AD1	33.4	-29	43.65	54	-10.35	-	-	-	-	61	242	H
3	* 3.857	42.82	PK1	33.4	-29	47.22	-	-	74	-26.78	-	-	9	309	V
	* 3.857	36.12	AD1	33.4	-29	40.52	54	-13.48	-	-	-	-	9	309	V
4	* 5.02	42.7	PK1	34.3	-26.2	50.8	-	-	74	-23.2	-	-	335	310	V
	* 5.021	31.88	AD1	34.3	-26.1	40.08	54	-13.92	-	-	-	-	335	310	V
6	* 11.571	37.8	PK1	38.1	-22	53.9	-	-	74	-20.1	-	-	35	246	V
	* 11.569	26.16	AD1	38.1	-22	42.26	54	-11.74	-	-	-	-	35	246	V
1	2.509	39.49	PK1	32.2	-30.2	41.49	-	-	-	-	68.2	-26.71	228	287	H
5	6.177	39.98	PK1	35.5	-26.4	49.08	-	-	-	-	68.2	-19.12	311	118	V

* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS

