



CERTIFICATION TEST REPORT

Report Number. : 16U23818-E3V4

Applicant : APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

Model : A1709, A1852

FCC ID : BCGA1709

IC : 579C-A1709

EUT Description : TABLET DEVICE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
INDUSTRY CANADA RSS - 247 ISSUE 1

Date Of Issue:
March 02, 2017

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP[®]
TESTING
NVLAP LAB CODE 200065-0

Revision History

| Rev. | Issue Date | Revisions | Revised By |
|------|------------|-----------------------|------------|
| V1 | 02/03/2017 | Initial Issue | Chin Pang |
| V2 | 02/16/2017 | Updated antenna names | Tina Chu |
| V3 | 02/17/2017 | Add Model Number | Chin Pang |
| V4 | 03/02/2017 | Address TCB Questions | Chin Pang |

TABLE OF CONTENTS

| | |
|---|-----------|
| 1. ATTESTATION OF TEST RESULTS | 5 |
| 2. TEST METHODOLOGY | 6 |
| 3. FACILITIES AND ACCREDITATION | 6 |
| 4. CALIBRATION AND UNCERTAINTY | 6 |
| 4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> | 6 |
| 4.2. <i>SAMPLE CALCULATION</i> | 6 |
| 4.3. <i>MEASUREMENT UNCERTAINTY.....</i> | 7 |
| 5. EQUIPMENT UNDER TEST | 8 |
| 5.1. <i>DESCRIPTION OF EUT</i> | 8 |
| 5.2. <i>DESCRIPTION OF MODELS DIFFERENCES.....</i> | 8 |
| 5.3. <i>MAXIMUM OUTPUT POWER.....</i> | 8 |
| 5.4. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> | 8 |
| 5.5. <i>SOFTWARE AND FIRMWARE.....</i> | 8 |
| 5.6. <i>WORST-CASE CONFIGURATION AND MODE.....</i> | 9 |
| 5.7. <i>DESCRIPTION OF TEST SETUP.....</i> | 10 |
| 6. TEST AND MEASUREMENT EQUIPMENT | 16 |
| 7. MEASUREMENT METHODS | 17 |
| 8. ANTENNA PORT TEST RESULTS | 18 |
| 8.1. <i>ON TIME AND DUTY CYCLE.....</i> | 18 |
| 8.2. <i>11b ANTENNA A SISO MODE IN THE 2.4GHz BAND</i> | 21 |
| 8.2.1. <i>6 dB BANDWIDTH.....</i> | 21 |
| 8.2.2. <i>99% BANDWIDTH.....</i> | 25 |
| 8.2.3. <i>AVERAGE POWER</i> | 29 |
| 8.2.4. <i>OUTPUT POWER</i> | 30 |
| 8.2.5. <i>POWER SPECTRAL DENSITY</i> | 32 |
| 8.2.6. <i>CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS.....</i> | 36 |
| 8.3. <i>11b ANTENNA B SISO MODE IN THE 2.4GHz BAND</i> | 42 |
| 8.3.1. <i>6 dB BANDWIDTH.....</i> | 42 |
| 8.3.2. <i>99% BANDWIDTH.....</i> | 46 |
| 8.3.3. <i>AVERAGE POWER</i> | 50 |
| 8.3.4. <i>OUTPUT POWER</i> | 51 |
| 8.3.5. <i>POWER SPECTRAL DENSITY</i> | 53 |
| 8.3.6. <i>CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS.....</i> | 57 |
| 8.4. <i>11n HT20 ANTENNA A SISO MODE IN THE 2.4GHz BAND</i> | 63 |
| 8.4.1. <i>6 dB BANDWIDTH.....</i> | 63 |

| | |
|---|------------|
| 8.4.2. 99% BANDWIDTH | 68 |
| 8.4.3. AVERAGE POWER | 73 |
| 8.4.4. OUTPUT POWER | 74 |
| 8.4.5. POWER SPECTRAL DENSITY | 76 |
| 8.4.6. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS..... | 81 |
| 8.5. 11n HT20 ANTENNA B SISO MODE IN THE 2.4GHz BAND | 89 |
| 8.5.1. 6 dB BANDWIDTH..... | 89 |
| 8.5.2. 99% BANDWIDTH..... | 94 |
| 8.5.3. AVERAGE POWER | 99 |
| 8.5.4. OUTPUT POWER | 100 |
| 8.5.5. POWER SPECTRAL DENSITY | 102 |
| 8.5.6. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS..... | 107 |
| 8.6. 11n HT20 2TX CDD MIMO MODE IN THE 2.4GHz BAND | 115 |
| 8.6.1. 6 dB BANDWIDTH..... | 115 |
| 8.6.2. 99% BANDWIDTH..... | 123 |
| 8.6.3. AVERAGE POWER | 131 |
| 8.6.4. OUTPUT POWER | 132 |
| 8.6.5. POWER SPECTRAL DENSITY | 134 |
| 8.6.6. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS..... | 142 |
| 9. RADIATED TEST RESULTS..... | 157 |
| 9.1. <i>LIMITS AND PROCEDURE</i> | 157 |
| 9.2. TRANSMITTER ABOVE 1 GHz | 158 |
| 9.2.1. 11b ANTENNA A SISO MODE IN THE 2.4GHz BAND | 158 |
| 9.2.2. 11b ANTENNA B SISO MODE IN THE 2.4GHz BAND | 172 |
| 9.2.3. 11n HT20 ANTENNA A SISO MODE IN THE 2.4GHz BAND | 186 |
| 9.2.4. 11n HT20 ANTENNA B SISO MODE IN THE 2.4GHz BAND | 204 |
| 9.2.5. 11n HT20 2TX CDD MIMO MODE IN THE 2.4GHz BAND | 222 |
| 9.3. <i>WORST-CASE BELOW 1 GHz.....</i> | 240 |
| 9.4. <i>WORST-CASE 18 to 26 GHz.....</i> | 242 |
| 10. AC POWER LINE CONDUCTED EMISSIONS | 244 |
| 10.1. <i>EUT POWERED BY AC/DC ADAPTER VIA USB CABLE.....</i> | 245 |
| 10.2. <i>EUT POWERED BY HOST PC VIA USB CABLE.....</i> | 247 |
| 11. SETUP PHOTOS | 249 |

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A

EUT DESCRIPTION: TABLET DEVICE

MODEL: A1709, A1852

SERIAL NUMBER: CONDUCTED (DLXSR01HHQGC),
RADIATED (DLXSR01JHQGC)

DATE TESTED: DECEMBER 17, 2016 to JANUARY 31, 2017

| APPLICABLE STANDARDS | |
|---------------------------------|--------------|
| STANDARD | TEST RESULTS |
| CFR 47 Part 15 Subpart C | Pass |
| INDUSTRY CANADA RSS-247 Issue 1 | Pass |
| INDUSTRY CANADA RSS-GEN Issue 4 | Pass |

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Prepared By:

MENGISTU MEKURIA

SENIOR ENGINEER
UL VERIFICATION SERVICES INC.

JINGANG LI

LAB ENGINEER
UL VERIFICATION SERVICES INC.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, KDB 558074 D01 v03r05, KDB 662911 D01 v02r01, ANSI C63.10-2013, RSS-GEN Issue 4, and RSS-247 Issue 1.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

| 47173 Benicia Street | 47266 Benicia Street |
|---|--|
| <input type="checkbox"/> Chamber A (IC:2324B-1) | <input type="checkbox"/> Chamber D (IC:2324B-4) |
| <input type="checkbox"/> Chamber B (IC:2324B-2) | <input checked="" type="checkbox"/> Chamber E (IC:2324B-5) |
| <input type="checkbox"/> Chamber C (IC:2324B-3) | <input checked="" type="checkbox"/> Chamber F (IC:2324B-6) |
| | <input checked="" type="checkbox"/> Chamber G (IC:2324B-7) |
| | <input checked="" type="checkbox"/> Chamber H (IC:2324B-8) |

The above test sites and facilities are covered under FCC Test Firm Registration # 208313.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| Parameter | Uncertainty |
|---|-------------|
| Worst Case Conducted Disturbance, 9KHz to 0.15 MHz | 3.84 dB |
| Worst Case Conducted Disturbance, 0.15 to 30 MHz | 3.65 dB |
| Worst Case Radiated Disturbance, 9KHz to 30 MHz | 3.15 dB |
| Worst Case Radiated Disturbance, 30 to 1000 MHz | 5.36 dB |
| Worst Case Radiated Disturbance, 1000 to 18000 MHz | 4.32 dB |
| Worst Case Radiated Disturbance, 18000 to 26000 MHz | 4.45 dB |
| Worst Case Radiated Disturbance, 26000 to 40000 MHz | 5.24 dB |

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT, model number A1709, A1852 is a tablet with multimedia functions (music, application support, and video), IEEE 802.11a/b/g/n/ac radio, and Bluetooth radio. The rechargeable battery is not user accessible.

5.2. DESCRIPTION OF MODELS DIFFERENCES

Both Model A1709 and A1852 have identical PCB layout, design and functionality, except that A1709 supports second electronic-UICC based SIM or “soft SIM” (called eSIM) beside the regular UICC based SIM and A1852 will come with eSIM removed. RF and electromagnetic characteristic are independent of the eSIM element. Both Models have exactly same technology and band support. Model A1709 is used for EMC/RSE and that data will be used for both Models.

5.3. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted peak output power as follows:

| Frequency Range (MHz) | Mode | Output Power (dBm) | Output Power (mW) |
|-----------------------|----------------------|-------------------------|-------------------|
| 2412 - 2472 | 802.11b 1TX | 22.55 | 179.89 |
| | 802.11g 1TX | Covered by HT20 1TX | |
| | 802.11g 2TX | Covered by HT20 2TX CDD | |
| | 802.11n HT20 1TX | 25.88 | 387.26 |
| | 802.11n HT20 2TX CDD | 28.71 | 743.02 |

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

| Frequency Band (GHz) | Antenna Gain (dBi) | |
|----------------------|--------------------|-----------|
| | Antenna A | Antenna B |
| 2.4 | 1.00 | -0.01 |

5.5. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was 14E232.

5.6. WORST-CASE CONFIGURATION AND MODE

For below 1G, 18-26GHz radiated emission, and power line conducted emissions were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The output power for PSD and spurious tests was set higher than maximum for the purposes of testing only.

For g and HT20 modes, radiated harmonics spurious and power line conducted emissions were performed with the EUT set at the CDD mode at highest power setting among the CDD/STBC/SDM modes as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X/Y/Z, it was determined that Y-Landscape was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in Y-Landscape.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps
802.11g mode: 6 Mbps
802.11n HT20mode: MCS0

The following modes have the same target power and use the same modulation (OFDM). Therefore, 802.11g 1TX and 802.11g 2TX are covered by 802.11n HT20 1TX and 802.11n HT20 2TX CDD respectively.

- 802.11g and 802.11n HT20 1TX
- 802.11g 2TX and 802.11n HT20 2TX CDD

For simultaneous transmission of multiple channels from the same antenna in the 2.4GHz and 5GHz bands, tests were conducted for various configurations having the highest power. No noticeable new emission was found.

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The WiFi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions.

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

| Support Equipment List | | | | |
|------------------------|--------------|-------|-------------------|--------|
| Description | Manufacturer | Model | Serial Number | FCC ID |
| Laptop | Apple | A1286 | 7313700NAGW | N/A |
| Laptop AC/DC adapter | Apple | A1343 | C062172045DDJ94A6 | N/A |
| Earphone | Apple | NA | NA | N/A |
| EUT AC/DC adapter | Apple | A1357 | W010A051 | N/A |

I/O CABLES (CONDUCTED TEST)

| I/O Cable List | | | | | | |
|----------------|---------|----------------------|----------------|-------------|------------------|----------------------|
| Cable No | Port | # of identical ports | Connector Type | Cable Type | Cable Length (m) | Remarks |
| 1 | Antenna | 1 | SMA | Un-Shielded | 0.2 | To spectrum Analyzer |
| 2 | USB | 1 | USB | Shielded | 1 | N/A |
| 3 | AC | 1 | AC | Un-shielded | 3 | N/A |

I/O CABLES (RADIATED ABOVE 1 GHZ)

| I/O Cable List | | | | | | |
|----------------|------|----------------------|----------------|------------|------------------|---------|
| Cable No | Port | # of identical ports | Connector Type | Cable Type | Cable Length (m) | Remarks |
| None Used | | | | | | |

I/O CABLES (RADIATED BELOW 1 GHZ AND AC LINE CONDUCTED: AC/DC ADAPTER CONFIGURATION)

| I/O Cable List | | | | | | |
|----------------|---------------|----------------|----------------|------------|------------------|---------|
| Cable No | Port | # of identical | Connector Type | Cable Type | Cable Length (m) | Remarks |
| 1 | Earphone Jack | 1 | 3.5mm Audio | Shielded | 0.9 | N/A |
| 2 | USB | 1 | USB | shielded | 1 | N/A |


I/O CABLES (AC LINE CONDUCTED: LAPTOP CONFIGUARTION)

| I/O Cable List | | | | | | |
|----------------|---------------|----------------|----------------|-------------|------------------|---------|
| Cable No | Port | # of identical | Connector Type | Cable Type | Cable Length (m) | Remarks |
| 1 | Earphone Jack | 1 | 3.5mm Audio | Shielded | 0.9 | N/A |
| 2 | USB | 1 | USB | Shielded | 1 | N/A |
| 3 | AC | 1 | AC | Un-shielded | 1.2 | N/A |

TEST SETUP - CONDUCTED TESTS

The EUT was connected to a host Laptop via USB cable adapter and spectrum analyzer to antenna port. Test software exercised the EUT.


SETUP DIAGRAM

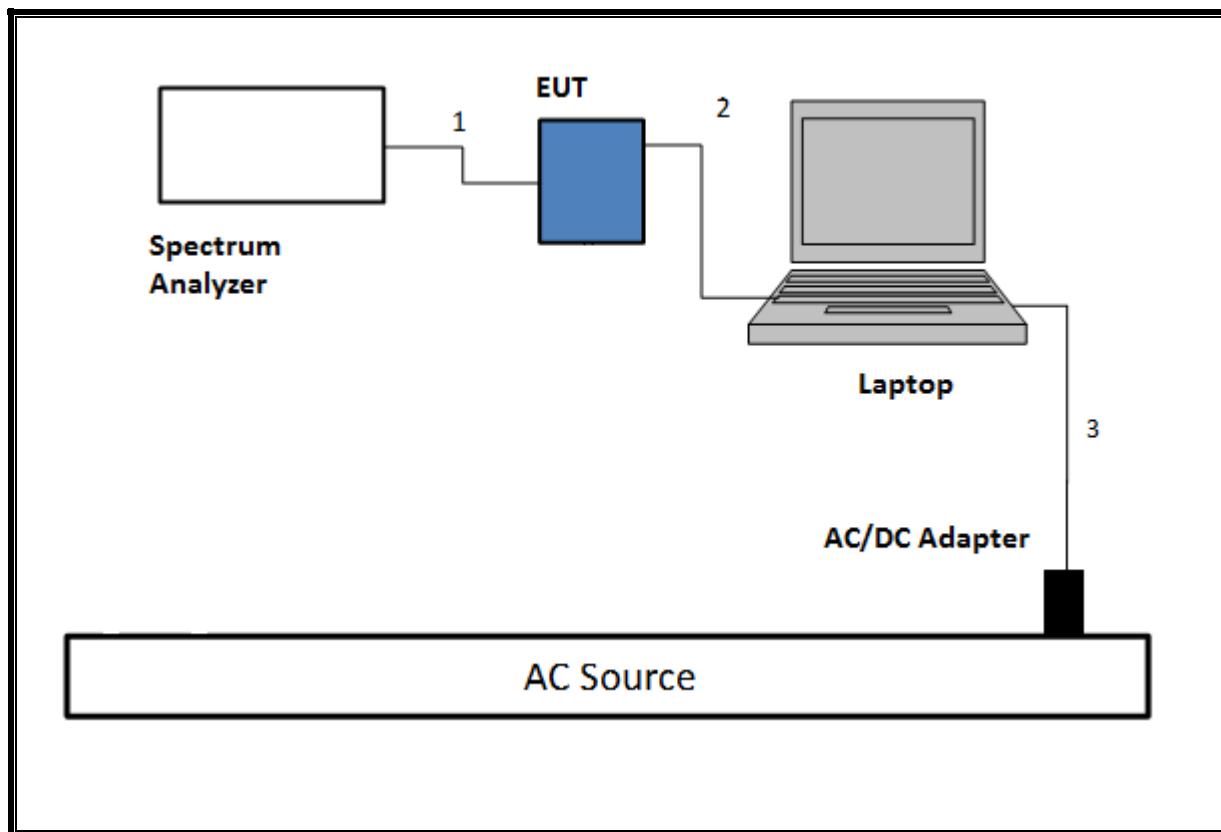

TEST SETUP- RADIATED-ABOVE 1 GHZ

The EUT was powered by battery. Test software exercised the EUT.


SETUP DIAGRAM

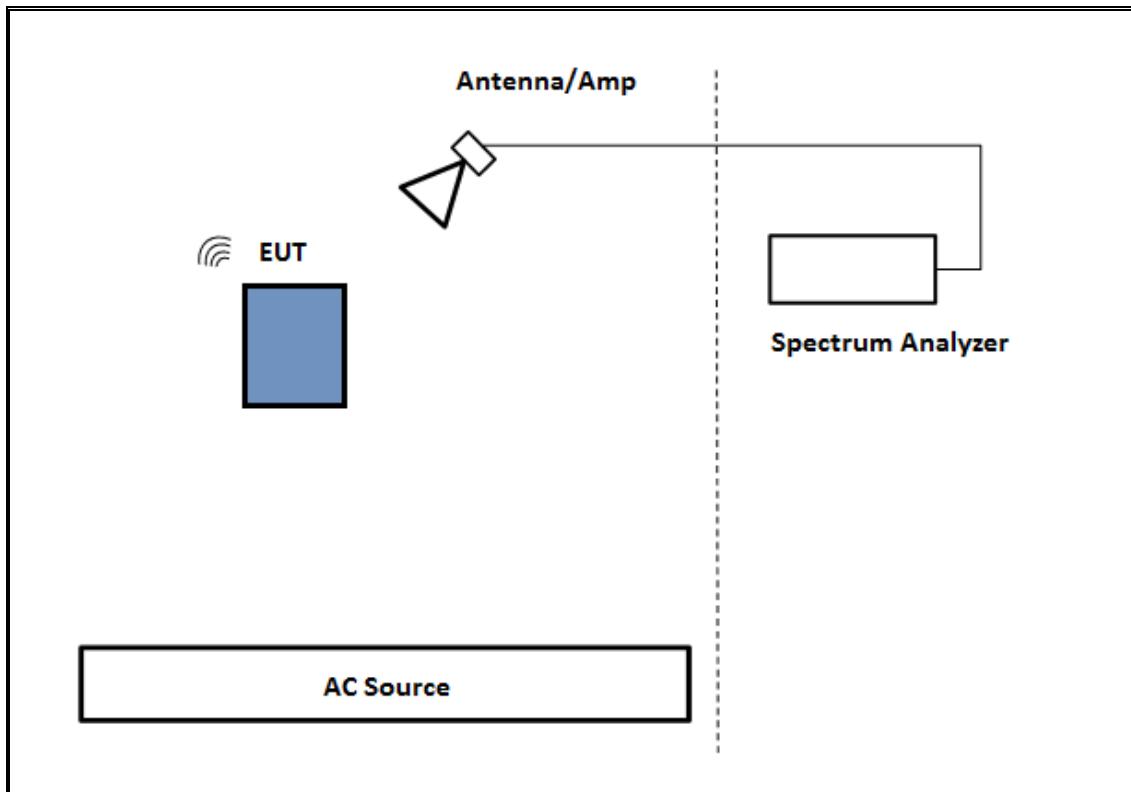

TEST SETUP- BELOW 1GHz

The EUT was powered by AC/DC adapter and connected with earphone. Test software exercised the EUT.


SETUP DIAGRAM

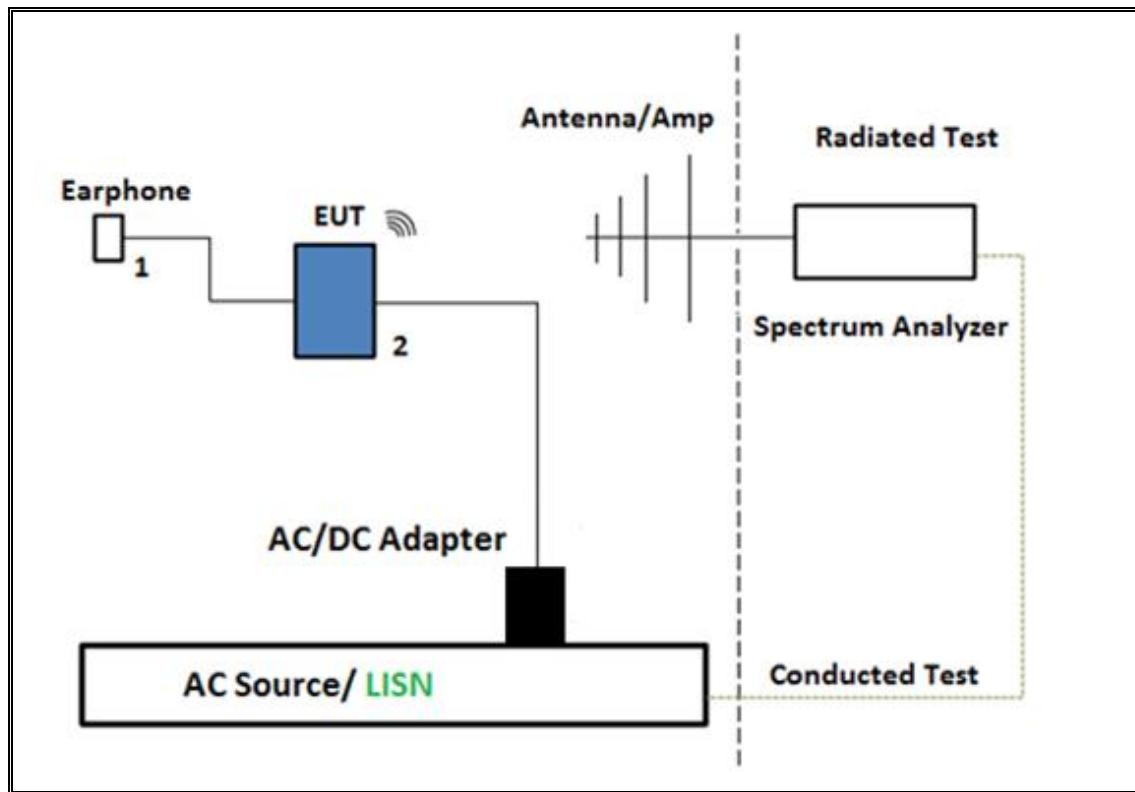

TEST SETUP- AC LINE CONDUCTED: AC/DC ADAPTER CONFIGURATION

The EUT was tested with earphone connected and powered by AC/DC adapter via USB cable. Test software exercised the EUT.


SETUP DIAGRAM

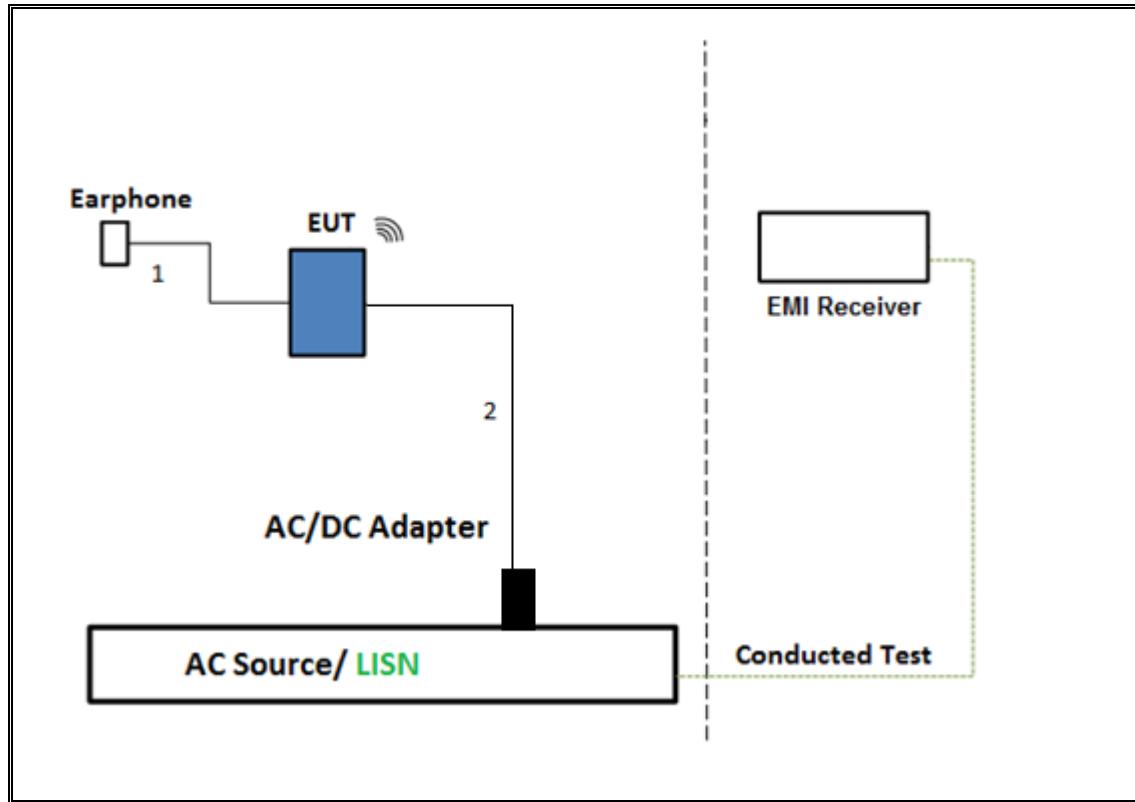

TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION

The EUT was tested with earphone connected and powered by host PC via USB cable. Test software exercised the EUT.

SETUP DIAGRAM

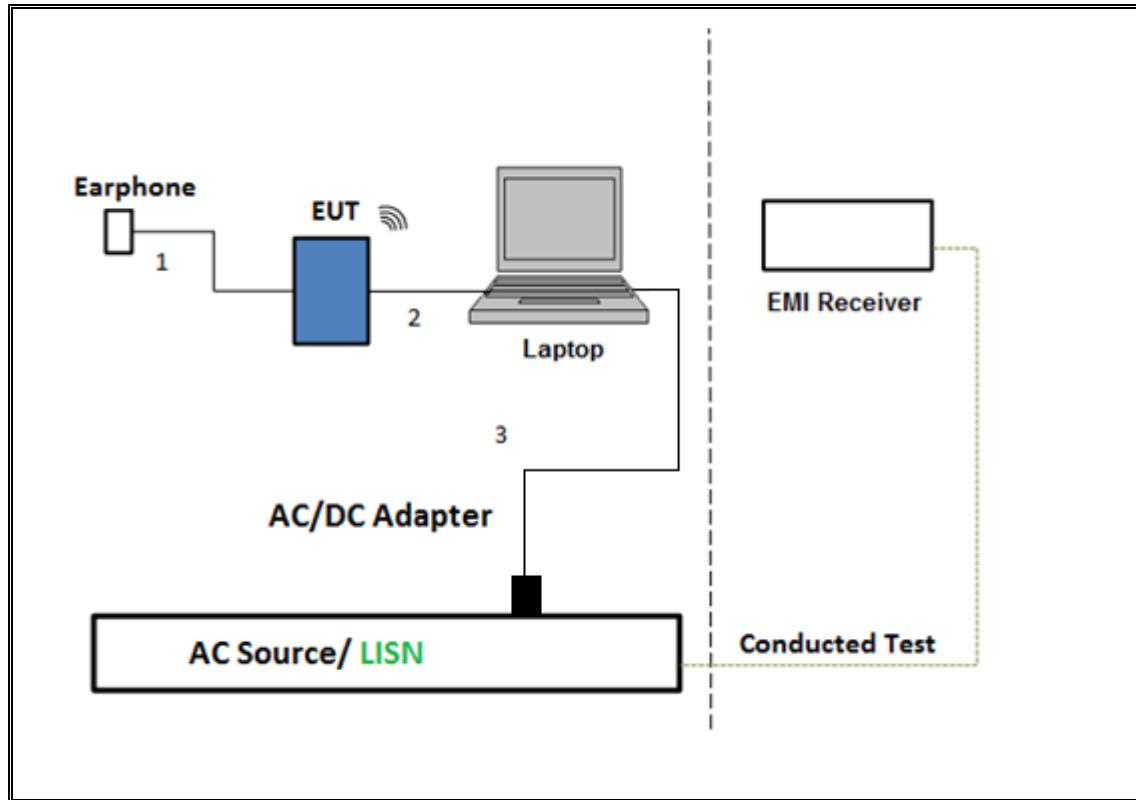

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| TEST EQUIPMENT LIST | | | | |
|---|---------------------------------|------------------------|---------------------------|------------|
| Description | Manufacturer | Model | Asset | Cal Due |
| Antenna, Horn 1-18GHz | ETS Lindgren | 3117 | T300 | 11/10/17 |
| Antenna, Broadband Hybrid, 30MHz to 2000MHz | Sunol Sciences | JB3 | T426 | 9/23/2017 |
| Amplifier, 1 to 18GHz | Miteq | AFS42-00101800-25-S-42 | T243 | 10/11/2017 |
| Amplifier, 10KHz to 1GHz, 32dB | Sonoma | 310N | T285 | 6/20/2017 |
| Spectrum Analyzer, PXA 3Hz to 44GHz | Keysight | N9030A | T1613 | 9/23/2017 |
| Antenna, Horn 1-18GHz | ETS Lindgren | 3117 | T862 | 4/18/2017 |
| Antenna, Broadband Hybrid, 30MHz to 2000MHz | Sunol Sciences | JB3 | T899 | 5/26/2017 |
| Amplifier, 1 to 18GHz | Miteq | AFS42-00101800-25-S-42 | T491 | 5/31/2017 |
| Amplifier, 10KHz to 1GHz, 32dB | Sonoma | 310N | T834 | 6/17/2017 |
| Spectrum Analyzer, PXA 3Hz to 44GHz | Keysight | N9030A-544 | T341 | 10/25/2017 |
| Antenna, Horn 1-18GHz | ETS Lindgren | 3117 | T863 | 4/26/2017 |
| Antenna, Broadband Hybrid, 30MHz to 2000MHz | Sunol Sciences | JB3 | T900 | 5/3/2017 |
| Amplifier, 1 to 18GHz, 35dB | Amplical | AMP1G18-35 | T1569 | 9/15/2017 |
| Amplifier, 10KHz to 1GHz, 32dB | Sonoma | 310N | T835 | 6/18/2017 |
| Spectrum Analyzer, PXA 3Hz to 44GHz | Keysight | N9030A | T1613 | 12/2/2017 |
| Spectrum Analyzer, PSA, 3Hz to 44GHz | Agilent (Keysight) Technologies | E4446A | T177 | 03/21/2017 |
| *Filter, HPF 3.0GHz | MICROTRONICS | HPM17543 | T487 | 01/26/2017 |
| Filter, HPF 1.2GHz | Micro-Tronics | WHKX1.2/15G-6ST | T1182 | 5/31/2017 |
| Antenna Horn, 18 to 26GHz | ARA | MWH-1826 | T447 | 6/16/2017 |
| Spectrum Analyzer, 40GHz | Agilent | 8564E | T106 | 9/7/2017 |
| Amplifier, 26-40GHz | Miteq | NSP4000-SP2 | 924343 | 4/7/2017 |
| Power Meter, P-series single channel | Keysight | N1912A | T1273 | 07/08/2017 |
| Power Sensor | Keysight | N1921A | T1224 | 03/22/2017 |
| AC Line Conducted | | | | |
| EMI Test Receiver 9Khz-7GHz | Rhode & Schwarz | ESCI7 | T212 | 09/13/2017 |
| LISN for Conducted Emissions CISPR-16 | Fischer | 50/250-25-2-01 | T1310 | 06/08/2017 |
| Power Cable, Line Conducted Emissions | UL | PG1 | T861 | 9/1/2017 |
| UL AUTOMATION SOFTWARE | | | | |
| Radiated Software | UL | UL EMC | Ver 9.5, April 26, 2016 | |
| Conducted Software | UL | UL EMC | Ver 5.4, October 13, 2016 | |
| AC Line Conducted Software | UL | UL EMC | Ver 9.5, May 26, 2015 | |

NOTE: *testing is completed before equipment calibration expiration date.

7. MEASUREMENT METHODS

6 dB BW: KDB 558074 D01 v03r05, Section 8.1.

Output Power: KDB 558074 D01 v03r05, Section 9.1.2.

Power Spectral Density: KDB 558074 D01 v03r05, Section 10.2.

Out-of-band emissions in non-restricted bands: KDB 558074 D01 v03r05, Section 11.0.

Out-of-band emissions in restricted bands: KDB 558074 D01 v03r05, Section 12.1.

Band-edge: KDB 558074 D01 v03r05, Section 12.1.

8. ANTENNA PORT TEST RESULTS

8.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.



PROCEDURE


KDB 558074 Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

| Mode | ON Time B (msec) | Period (msec) | Duty Cycle x (linear) | Duty Cycle (%) | Duty Cycle Correction Factor (dB) | 1/B Minimum VBW (kHz) |
|----------------------|------------------------|------------------|-----------------------------|----------------------|---|-----------------------------|
| 802.11b 1TX | 12.430 | 12.430 | 1.000 | 100.00% | 0.00 | 0.010 |
| 802.11n HT20 1TX | 1.914 | 1.937 | 0.988 | 98.81% | 0.00 | 0.010 |
| 802.11n HT20 CDD 2TX | 1.920 | 1.946 | 0.987 | 98.66% | 0.00 | 0.010 |

DUTY CYCLE PLOTS

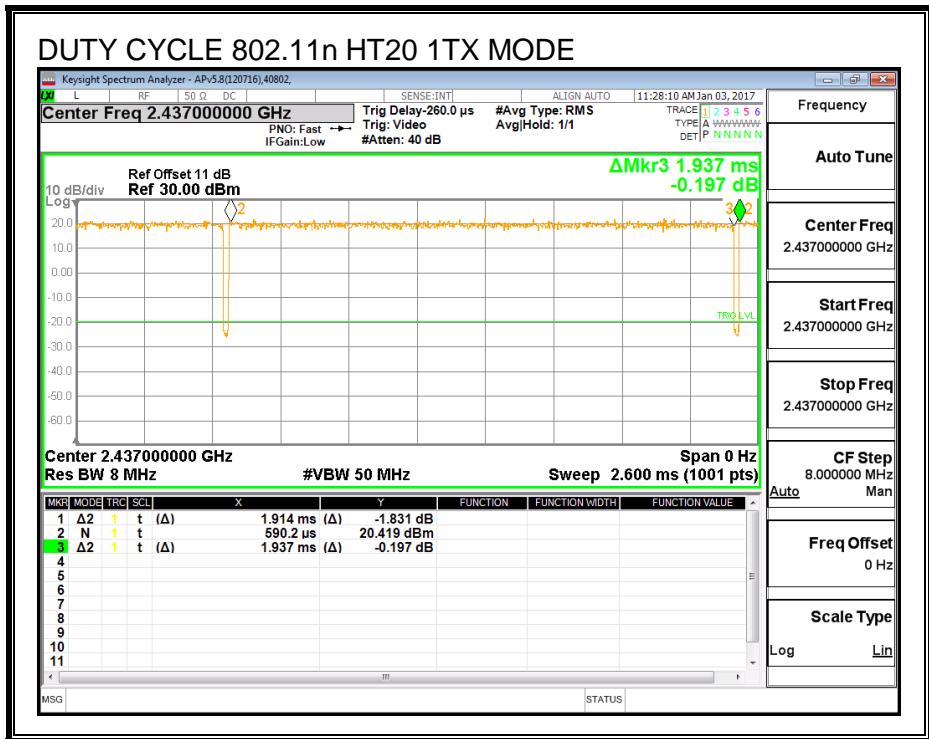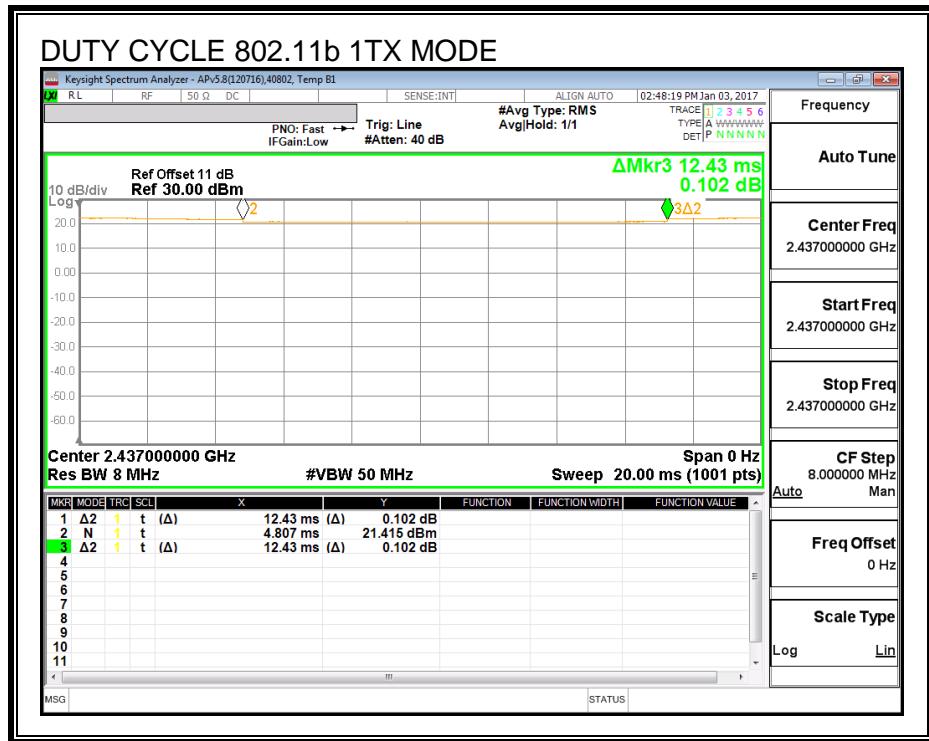

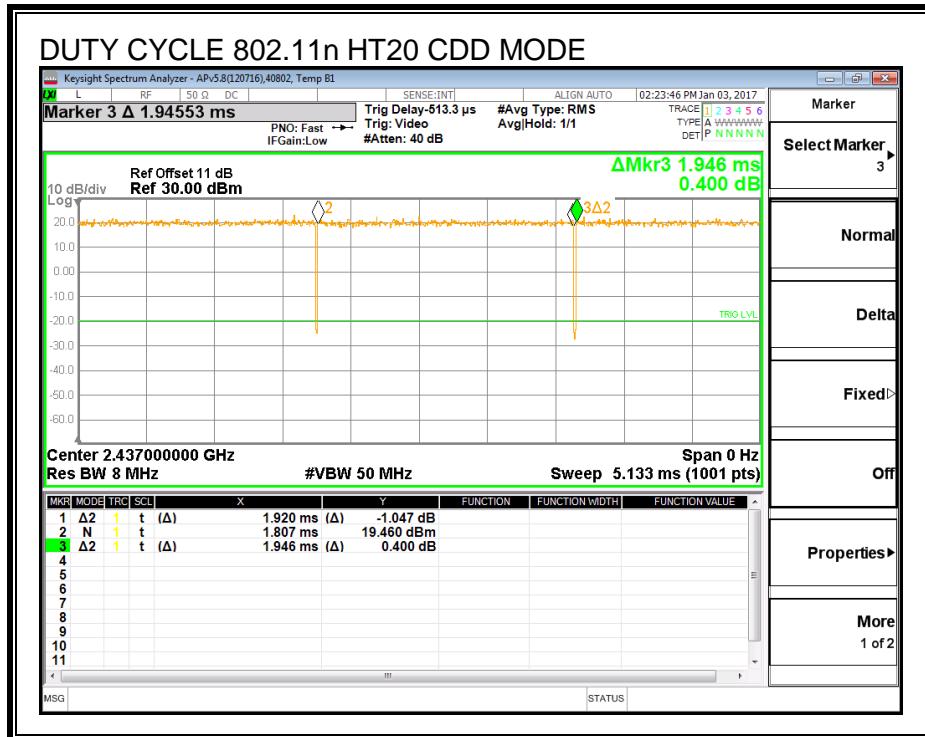

8.2. 11b ANTENNA A SISO MODE IN THE 2.4GHz BAND

8.2.1. 6 dB BANDWIDTH

LIMITS



FCC §15.247 (a) (2)



IC RSS-247 (5.2) (1)


The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

| Channel | Frequency | 6 dB BW ANTENNA A (MHz) | Minimum Limit (MHz) |
|----------|-----------|-------------------------------|------------------------|
| Low_1 | 2412 | 8.055 | 0.5 |
| Middle_6 | 2437 | 8.050 | 0.5 |
| High_11 | 2462 | 8.555 | 0.5 |
| High_12 | 2467 | 7.605 | 0.5 |
| High_13 | 2472 | 8.030 | 0.5 |

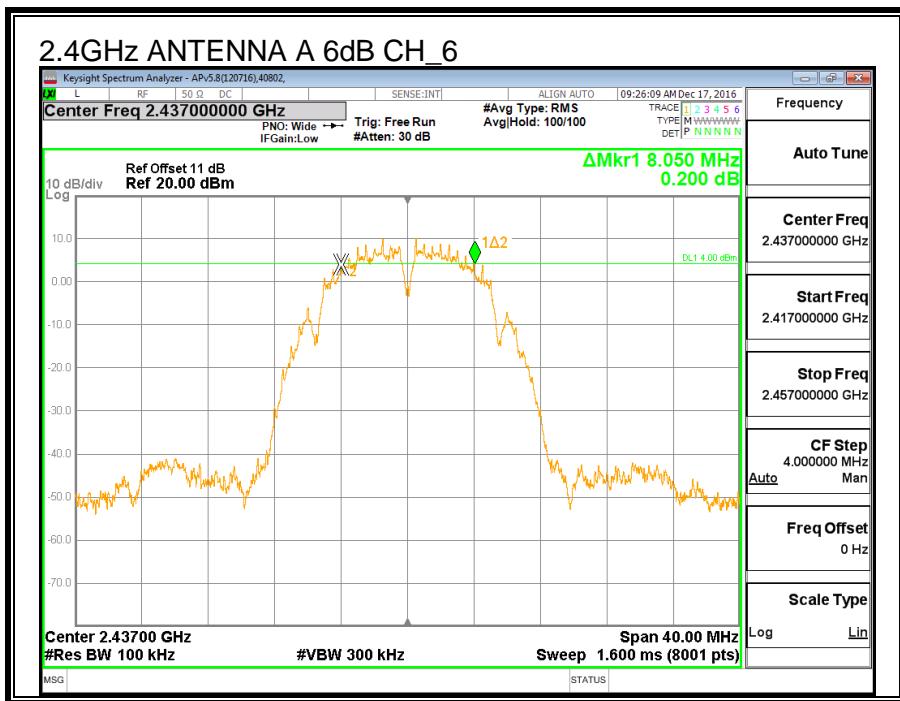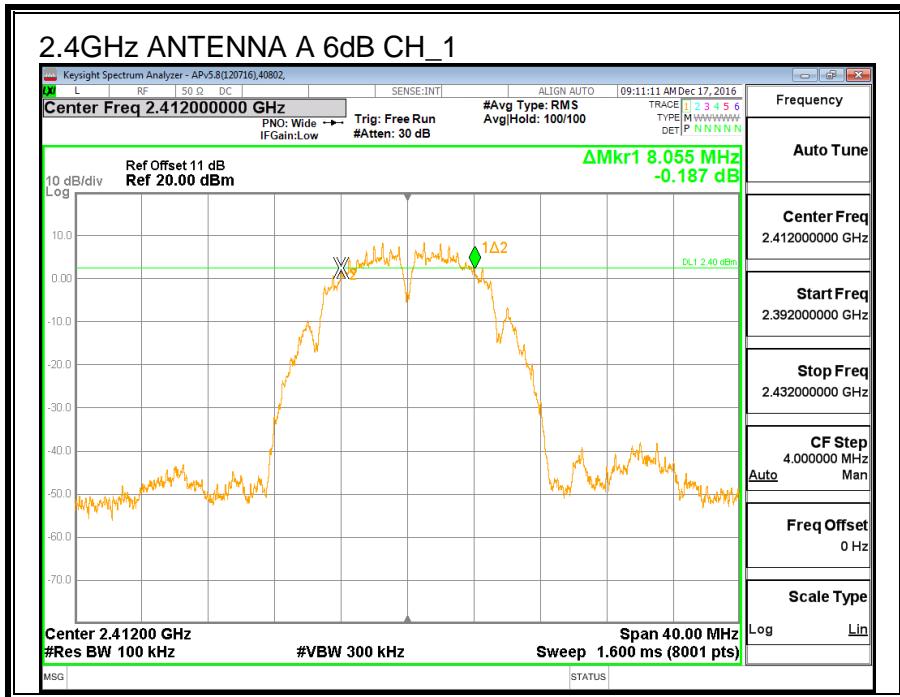

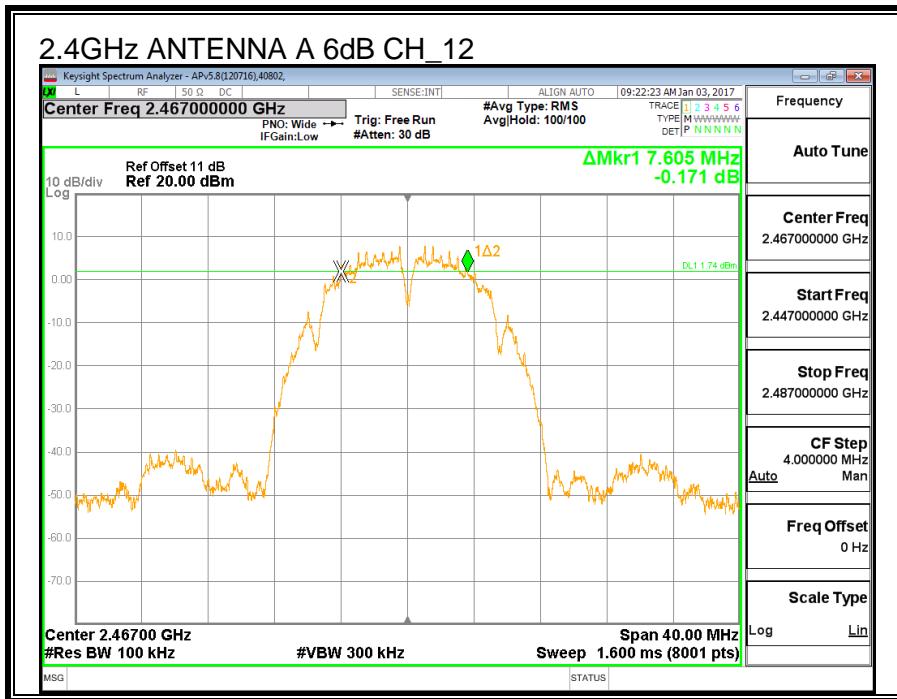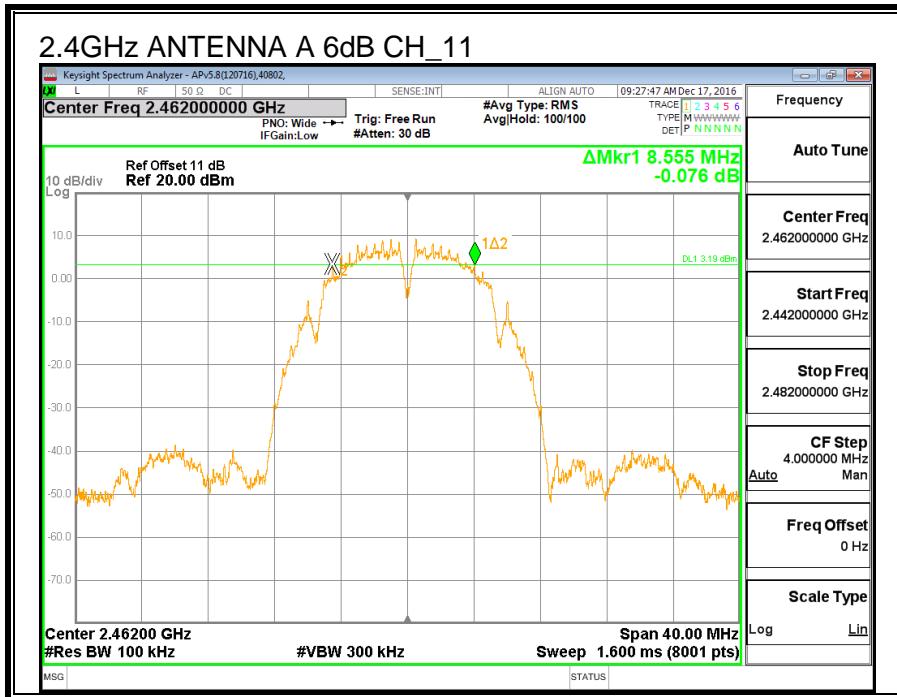

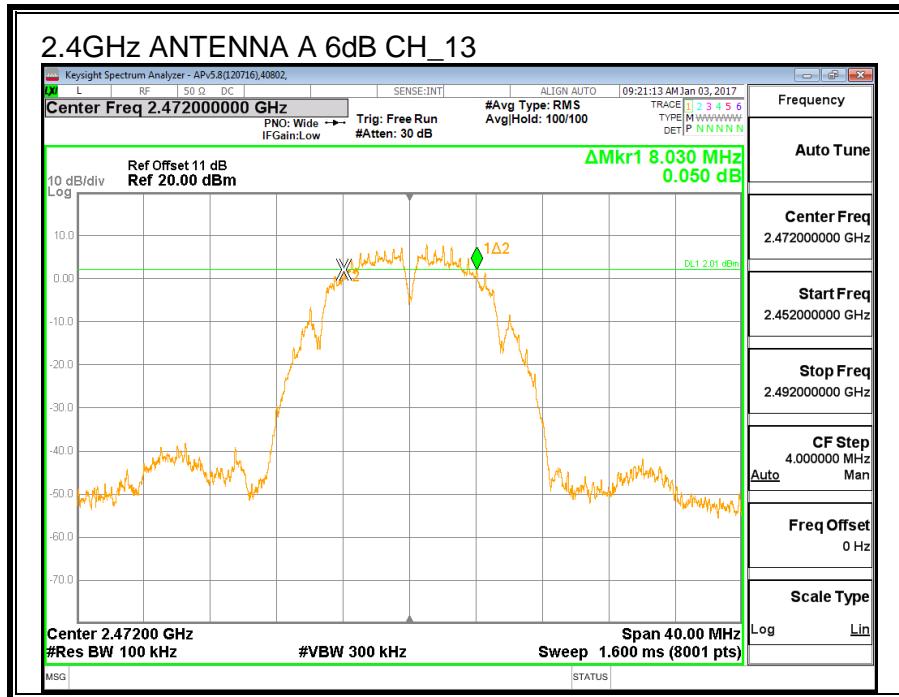



8.2.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

| Channel | Frequency (MHz) | 99% Bandwidth ANTENNA A (MHz) |
|----------|-----------------|----------------------------------|
| Low_1 | 2412 | 10.804 |
| Middle_6 | 2437 | 10.833 |
| High_11 | 2462 | 10.740 |
| High_12 | 2467 | 10.813 |
| High_13 | 2472 | 10.329 |

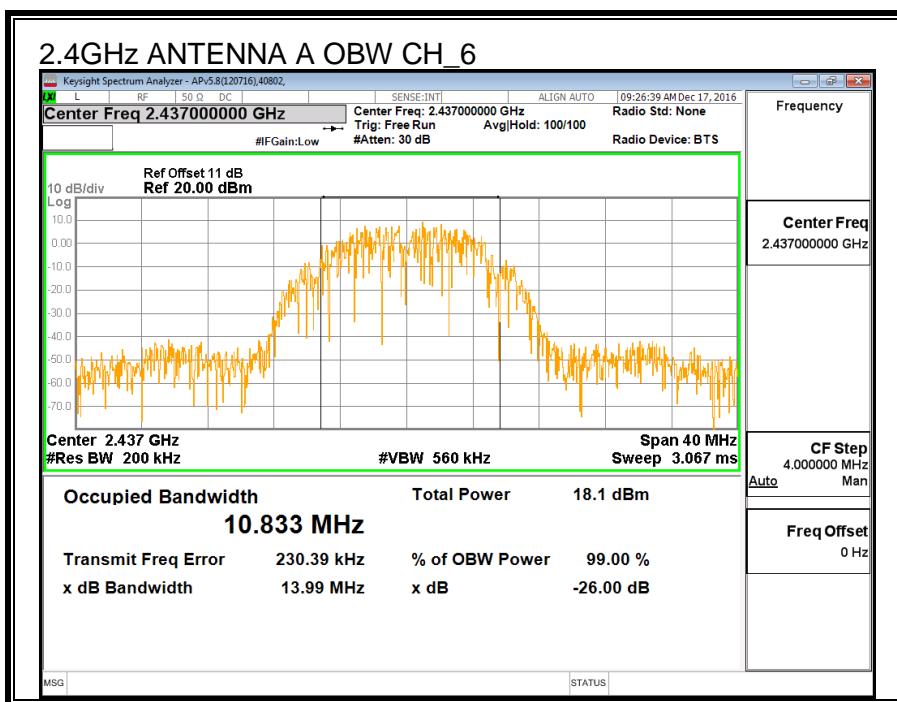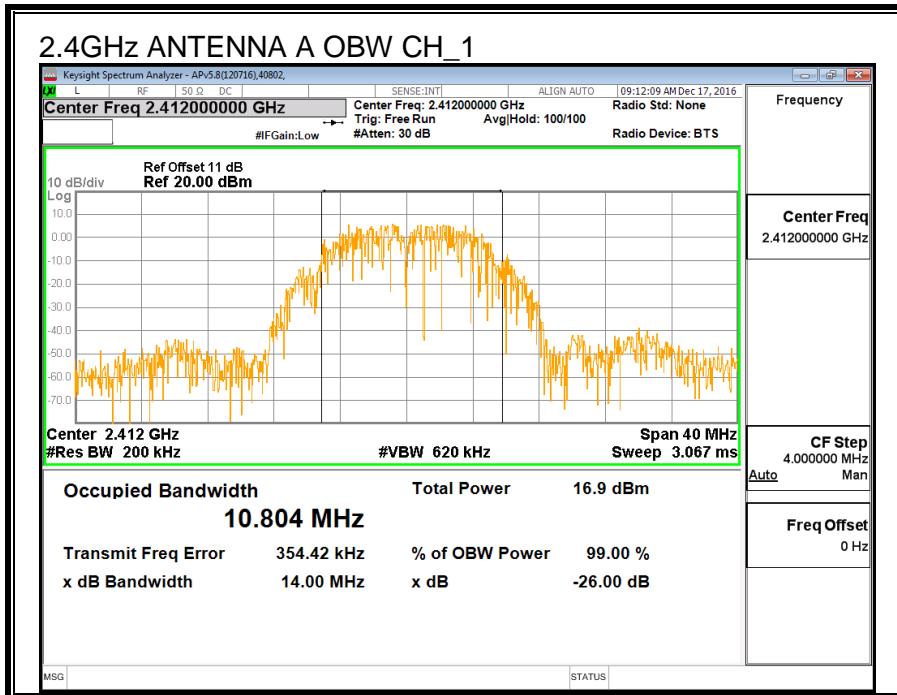

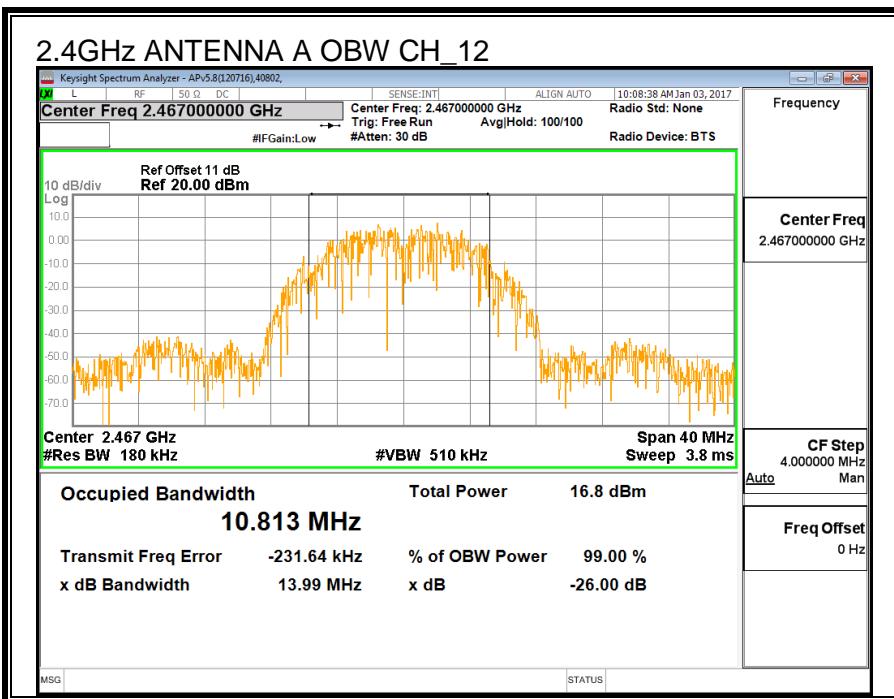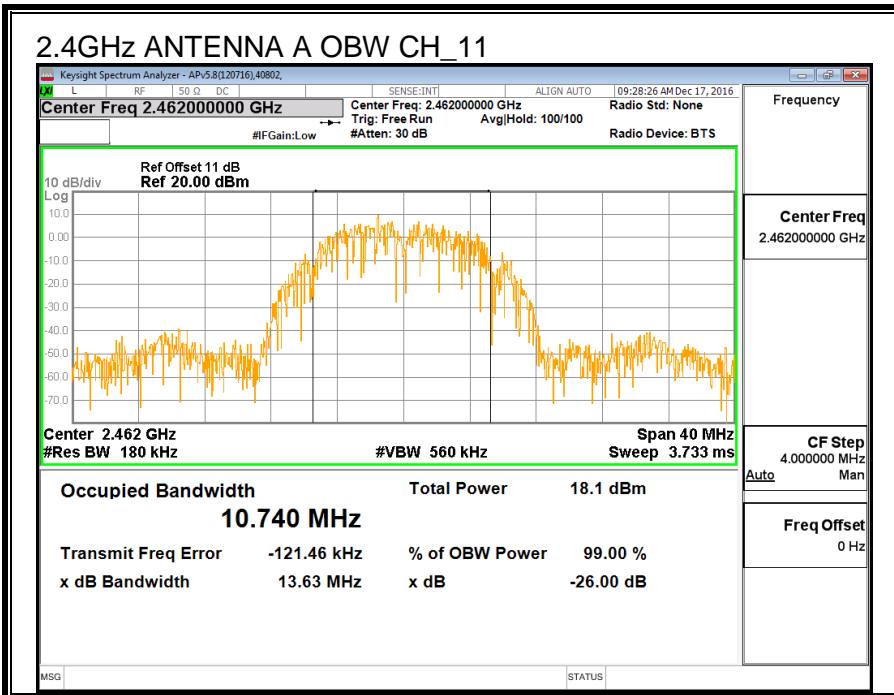

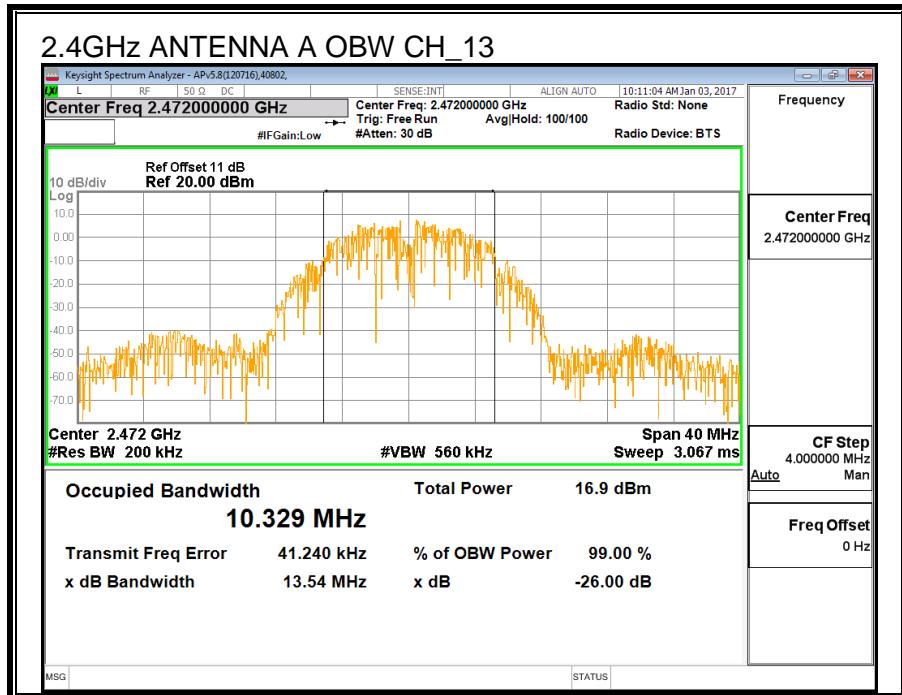

8.2.3. AVERAGE POWER

| | | | |
|------------|-------|--------------|---------|
| ID: | 52291 | Date: | 1/20/17 |
|------------|-------|--------------|---------|

LIMITS

None; for reporting purposes only.

RESULTS

| Channel | Frequency (MHz) | Power ANTENNA A (MHz) |
|----------|-----------------|-----------------------|
| Low_1 | 2412 | 18.88 |
| Middle_6 | 2437 | 18.90 |
| High_11 | 2462 | 18.32 |
| High_12 | 2467 | 17.35 |
| High_13 | 2472 | 14.21 |

8.2.4. OUTPUT POWER

| | | | |
|-----|-------|-------|---------|
| ID: | 44353 | Date: | 1/31/17 |
|-----|-------|-------|---------|

LIMITS

FCC §15.247(b) (3)

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Limits

| Channel | Frequency (MHz) | Directional Gain (dBi) | FCC Power Limit (dBm) | IC Power Limit (dBm) | IC EIRP Limit (dBm) | Max Power (dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low | 2412 | 1.0 | 30.00 | 30 | 36 | 30.00 |
| Mid | 2437 | 1.0 | 30.00 | 30 | 36 | 30.00 |
| High_11 | 2462 | 1.0 | 30.00 | 30 | 36 | 30.00 |
| High_12 | 2467 | 1.0 | 30.00 | 30 | 36 | 30.00 |
| High_13 | 2472 | 1.0 | 30.00 | 30 | 36 | 30.00 |

| | | |
|--------------------|------|--|
| Duty Cycle CF (dB) | 0.00 | Included in Calculations of Corr'd Power |
|--------------------|------|--|

Results

| Channel | Frequency (MHz) | Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Margin (dB) |
|---------|--------------------|------------------------|-----------------------------------|-------------------------|----------------|
| Low | 2412 | 22.32 | 22.32 | 30.00 | -7.68 |
| Mid | 2437 | 22.33 | 22.33 | 30.00 | -7.67 |
| High_11 | 2462 | 21.94 | 21.94 | 30.00 | -8.06 |
| High_12 | 2467 | 20.85 | 20.85 | 30.00 | -9.15 |
| High_13 | 2472 | 17.87 | 17.87 | 30.00 | -12.13 |

8.2.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)



For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.



RESULTS


| Duty Cycle CF (dB) | 0.00 | Included in Calculations of Corr'd PSD |
|--------------------|------|--|
|--------------------|------|--|

PSD Results

| Channel | Frequency (MHz) | Meas (dBm) | Total Corr'd PSD (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|------------|------------------------|-------------|-------------|
| Low | 2412 | -6.358 | -6.358 | 8.0 | -14.4 |
| Mid | 2437 | -5.396 | -5.396 | 8.0 | -13.4 |
| High_11 | 2462 | -5.989 | -5.989 | 8.0 | -14.0 |
| High_12 | 2467 | -5.138 | -5.138 | 8.0 | -13.1 |
| High_13 | 2472 | -6.659 | -6.659 | 8.0 | -14.7 |

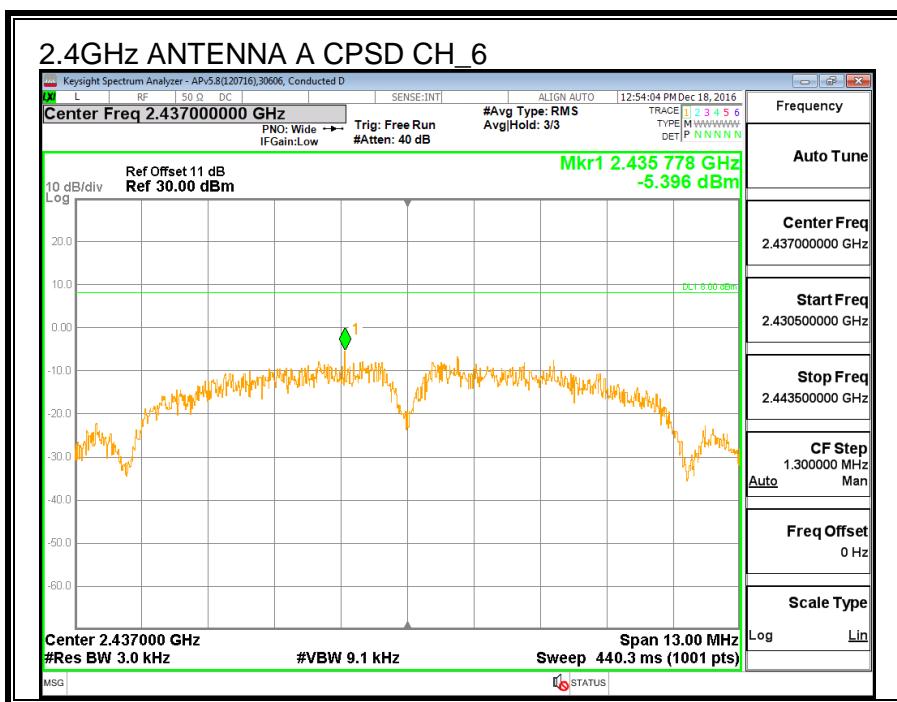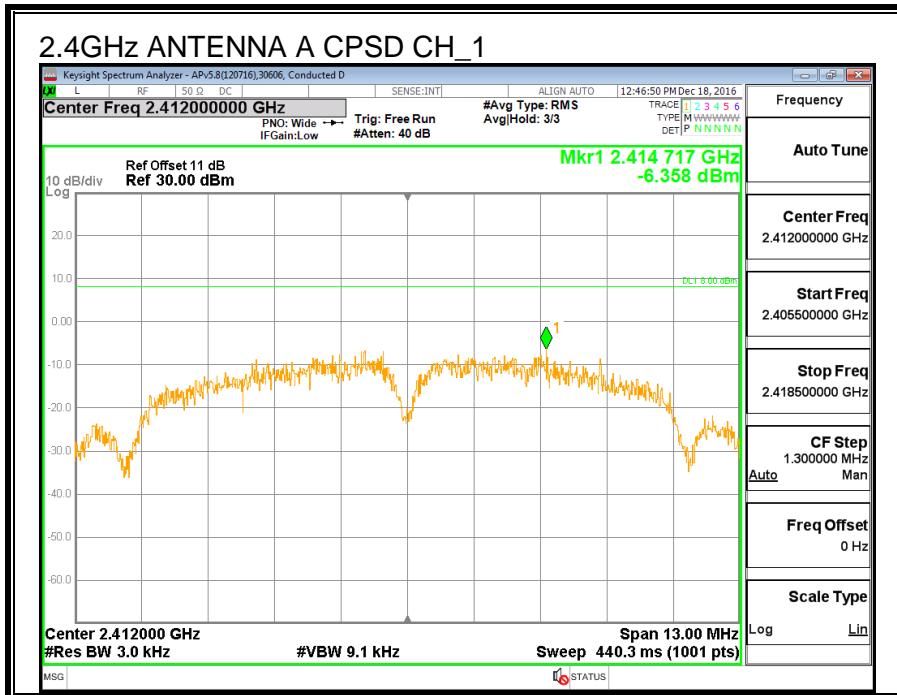

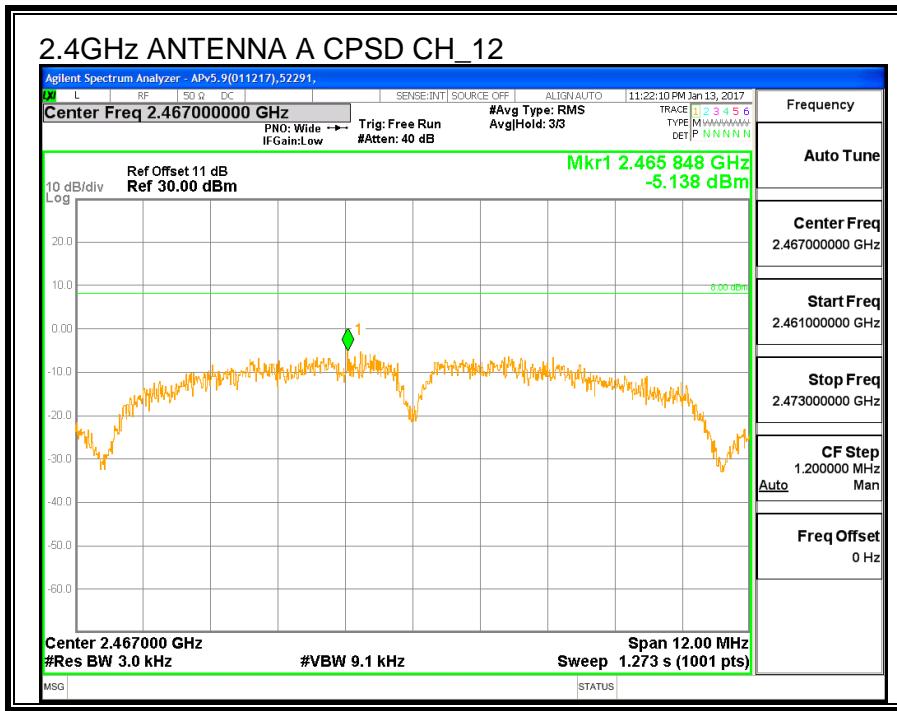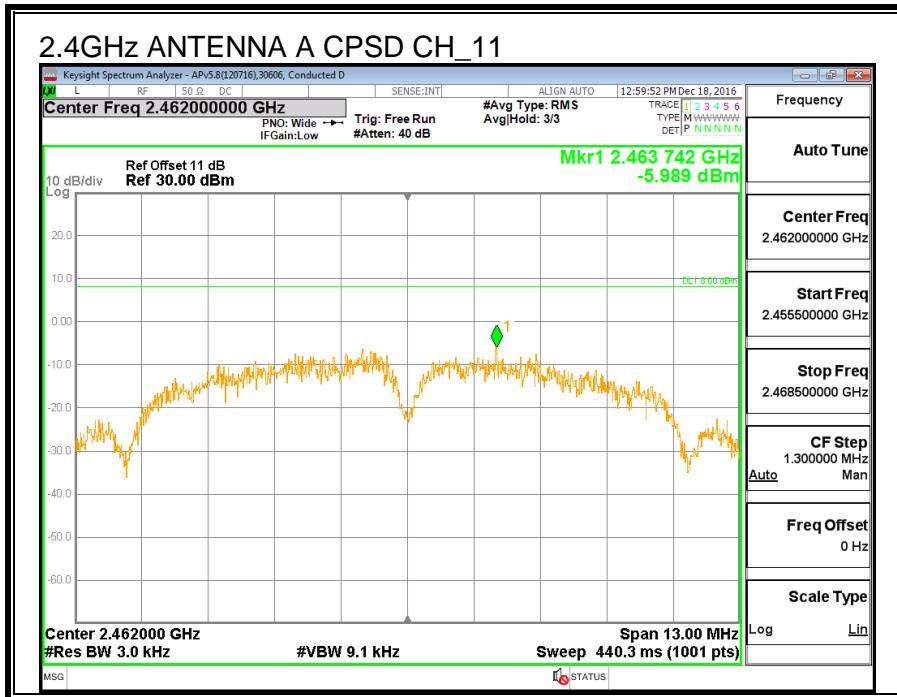

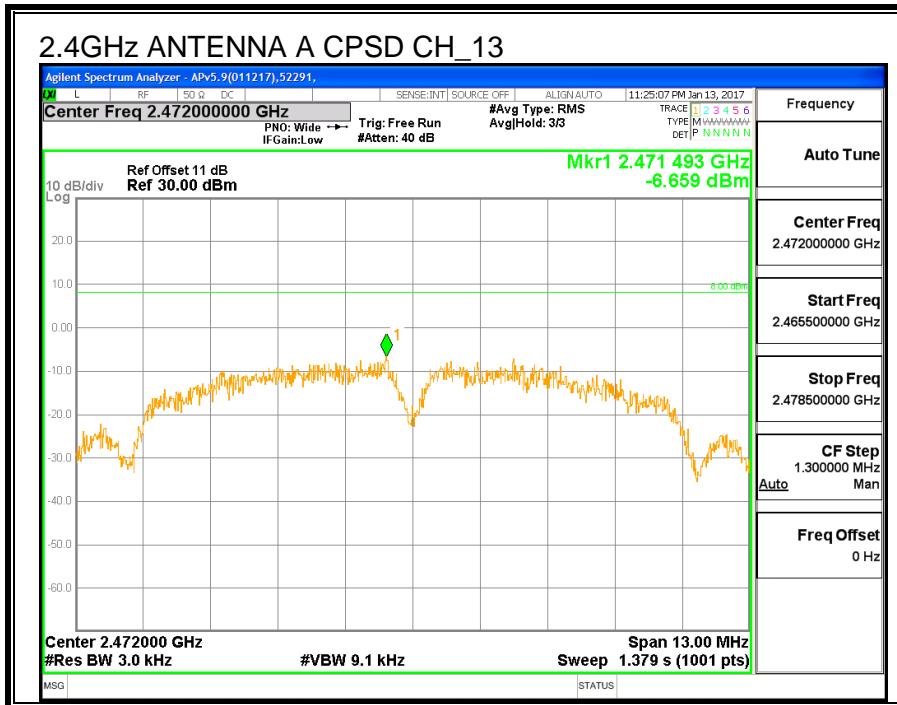



8.2.6. CONDUCTED BANDEdge AND SPURIOUS EMISSIONS



LIMITS



FCC §15.247 (d)



IC RSS-247 (5.5)



In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

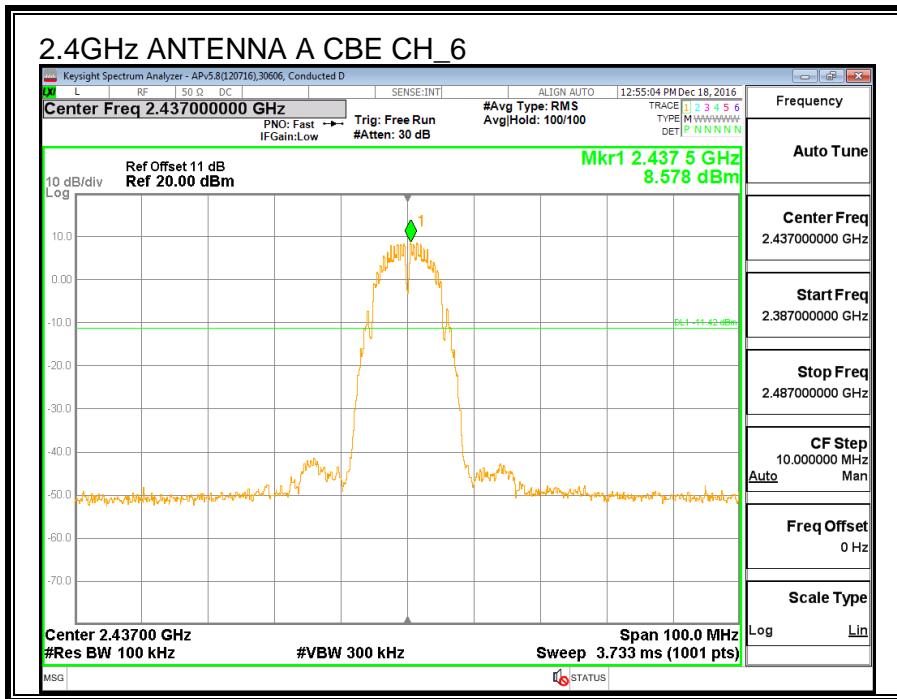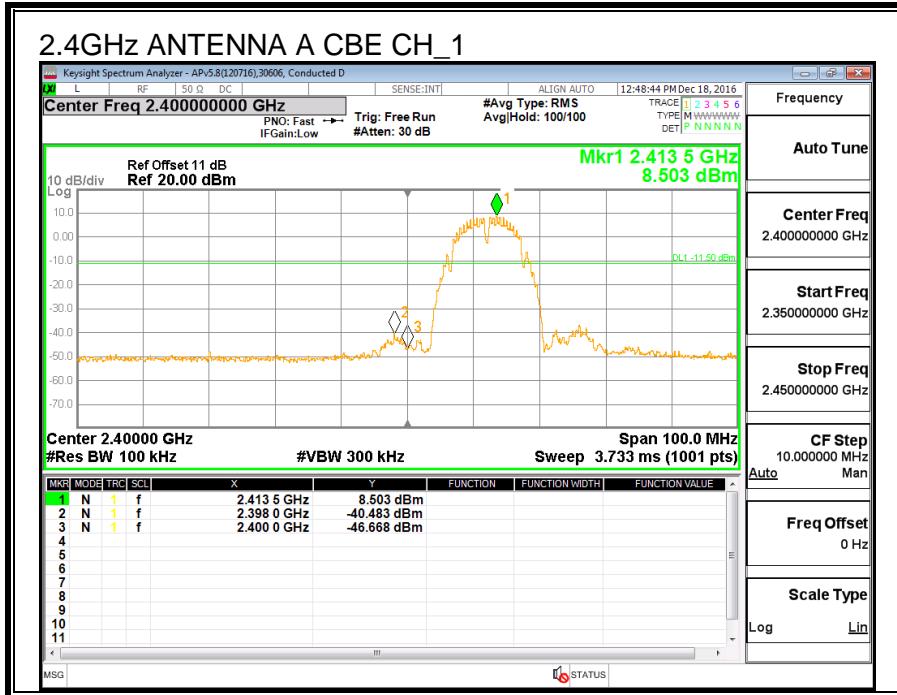

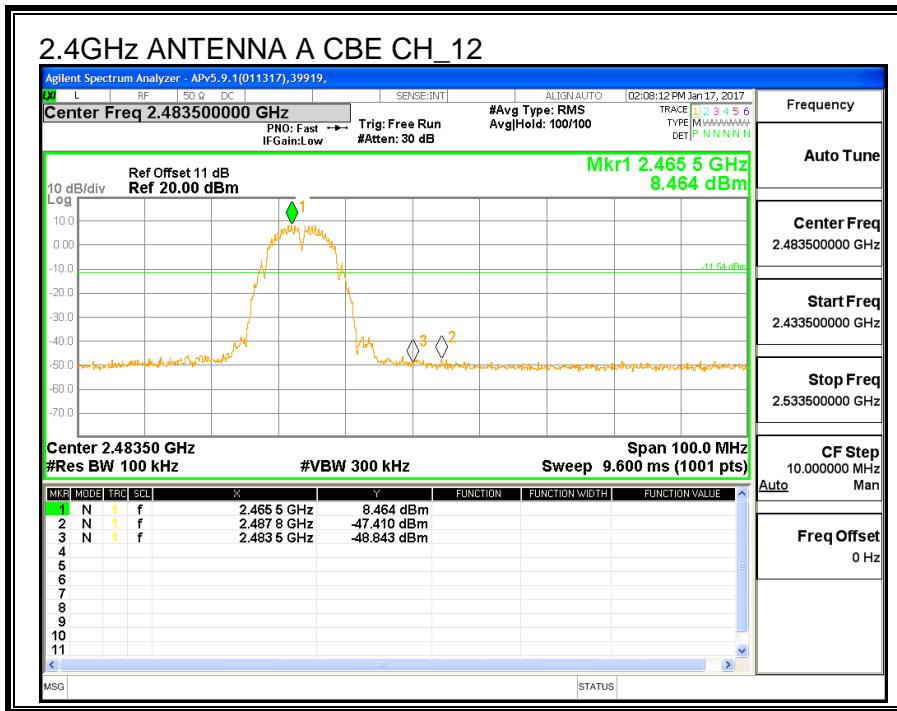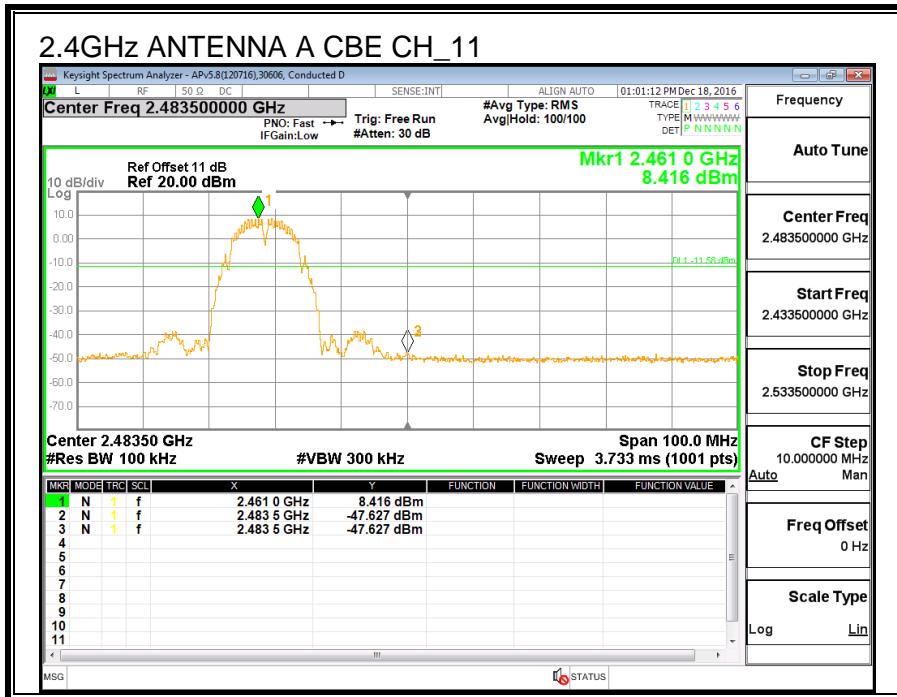

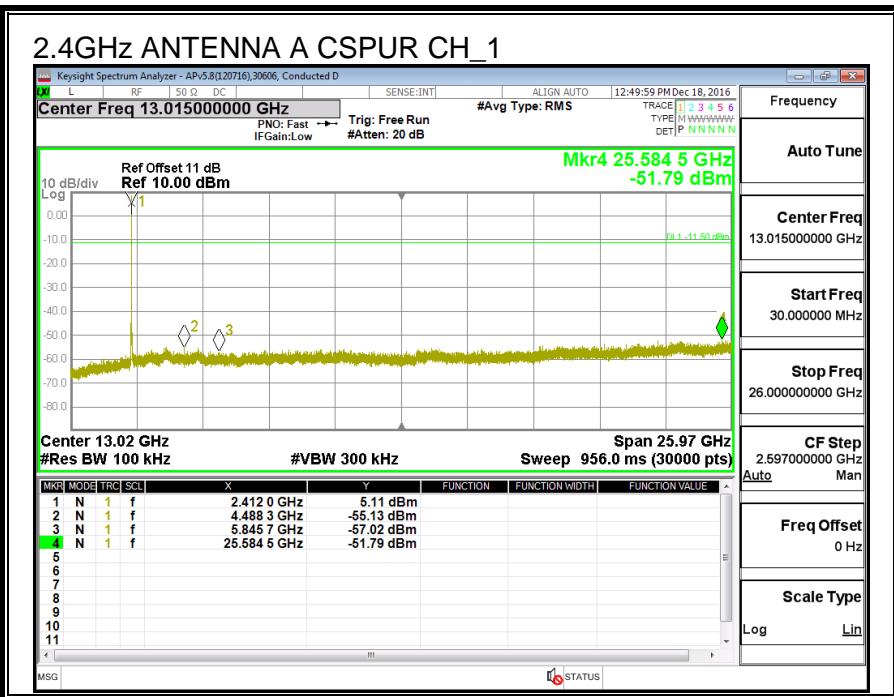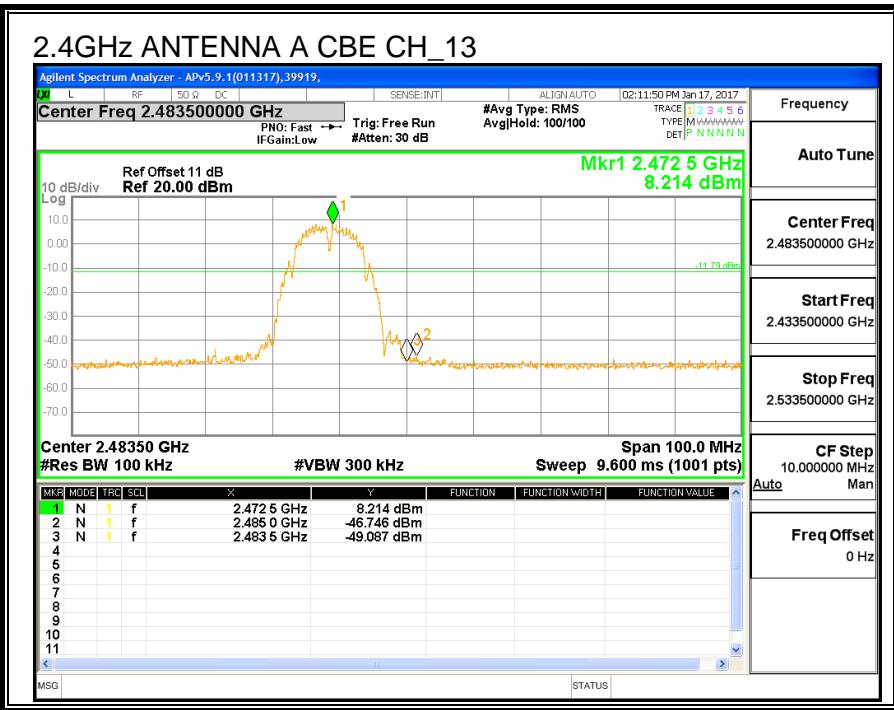

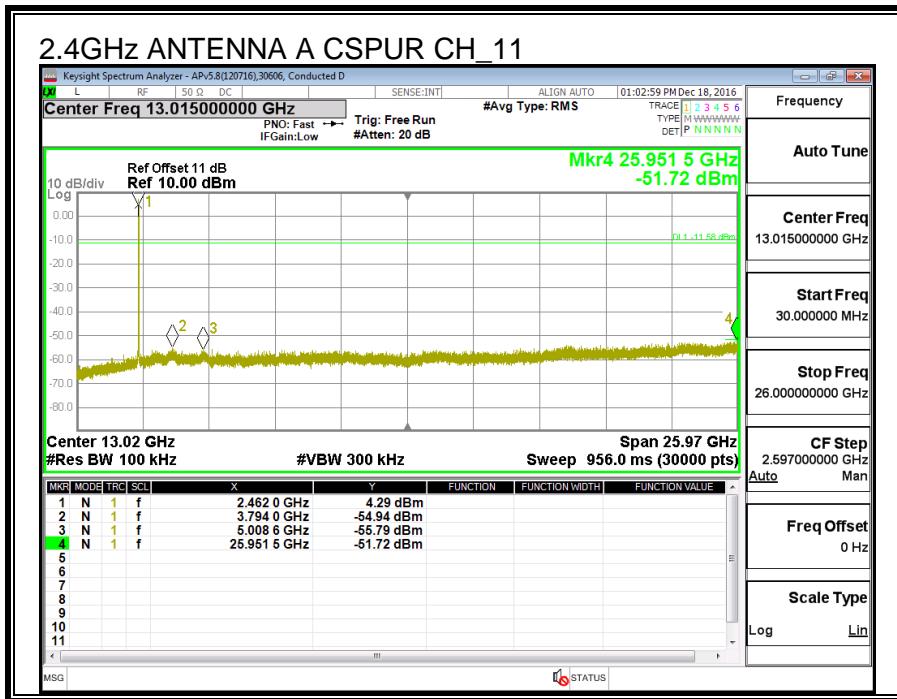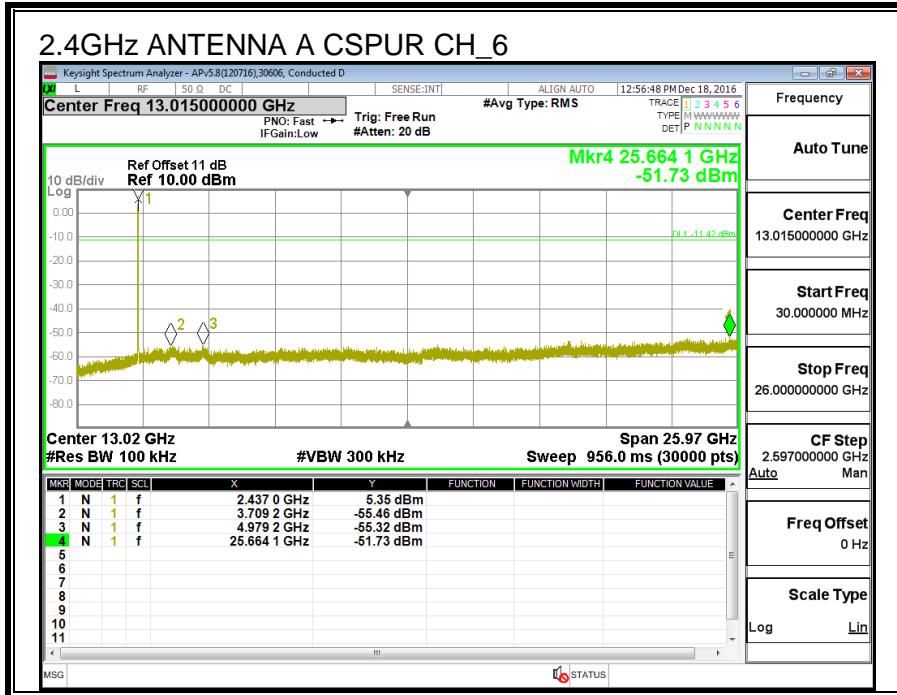

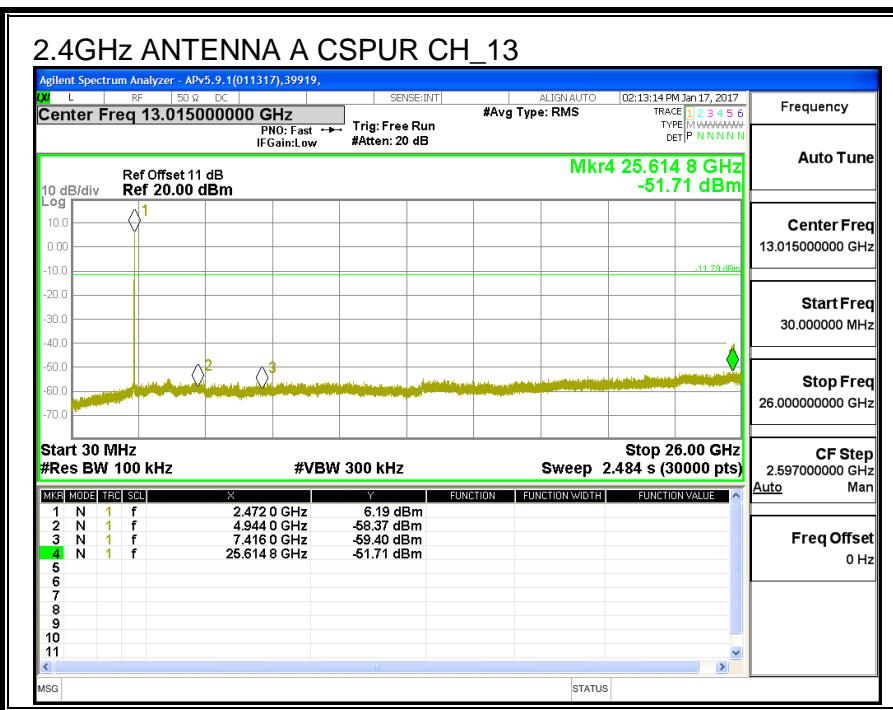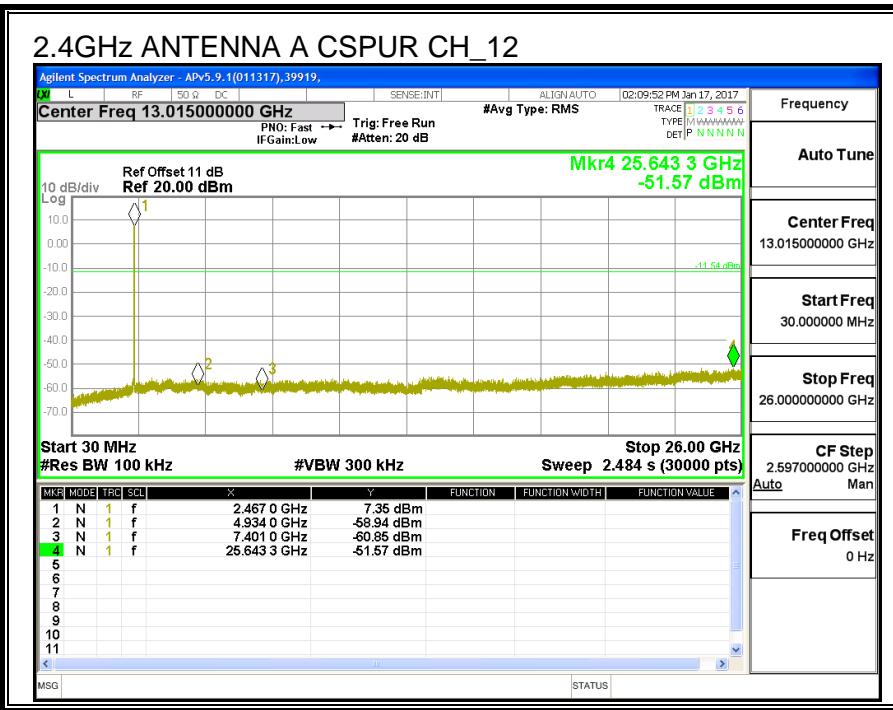

8.3. 11b ANTENNA B SISO MODE IN THE 2.4GHz BAND

8.3.1. 6 dB BANDWIDTH

LIMITS



FCC §15.247 (a) (2)



IC RSS-247 (5.2) (1)


The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

| Channel | Frequency | 6 dB BW ANTENNA B (MHz) | Minimum Limit (MHz) |
|----------|-----------|-------------------------------|------------------------|
| Low_1 | 2412 | 8.570 | 0.5 |
| Middle_6 | 2437 | 8.100 | 0.5 |
| High_11 | 2462 | 8.070 | 0.5 |
| High_12 | 2467 | 7.690 | 0.5 |
| High_13 | 2472 | 8.555 | 0.5 |

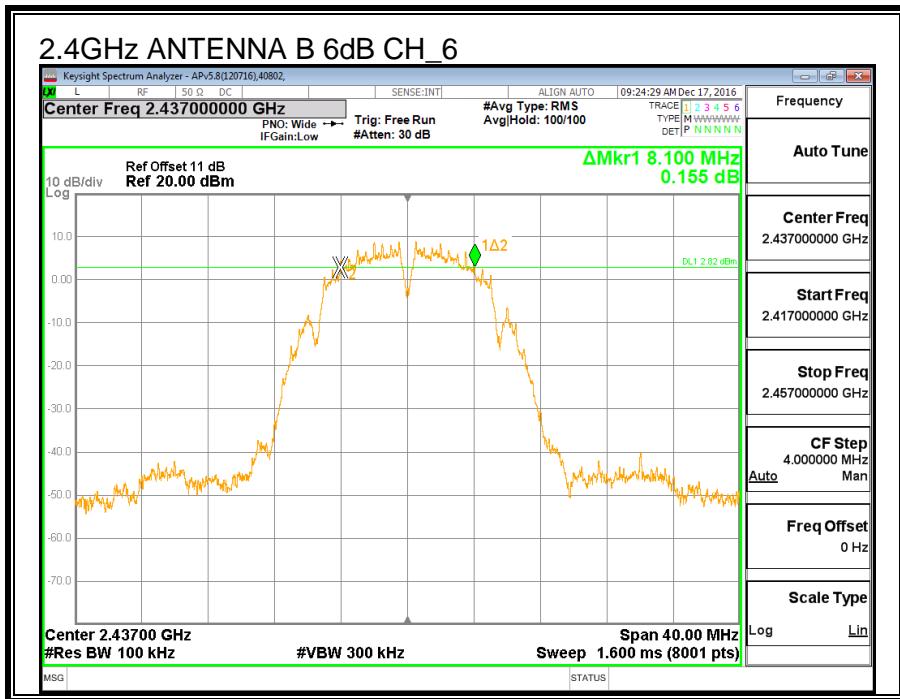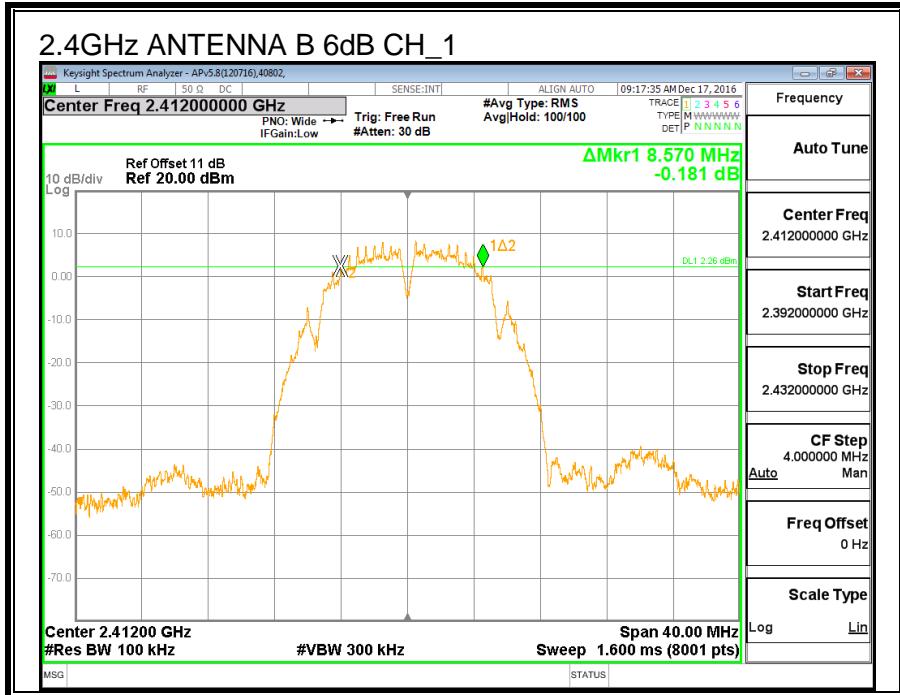

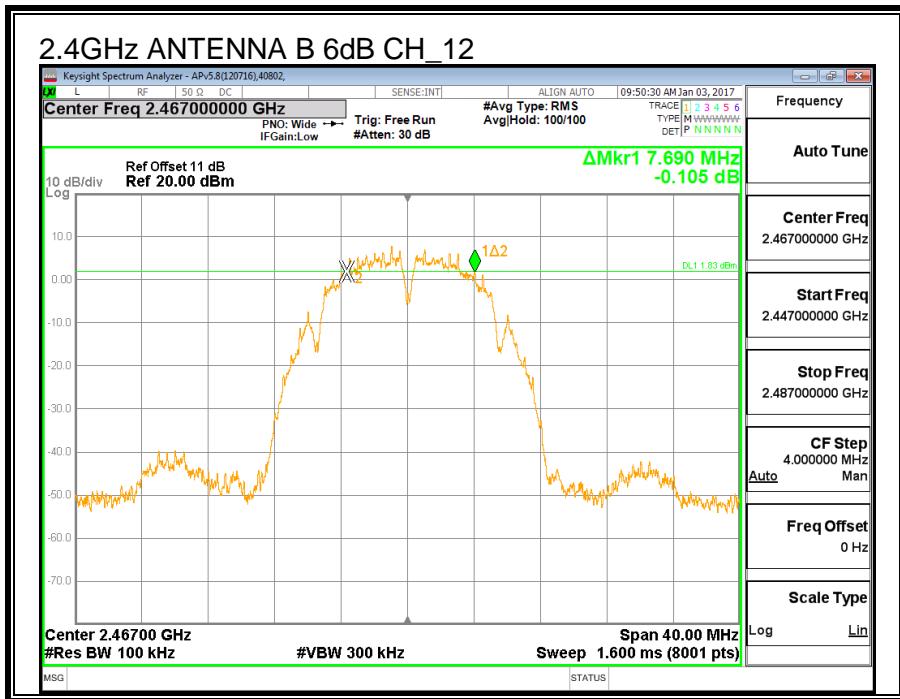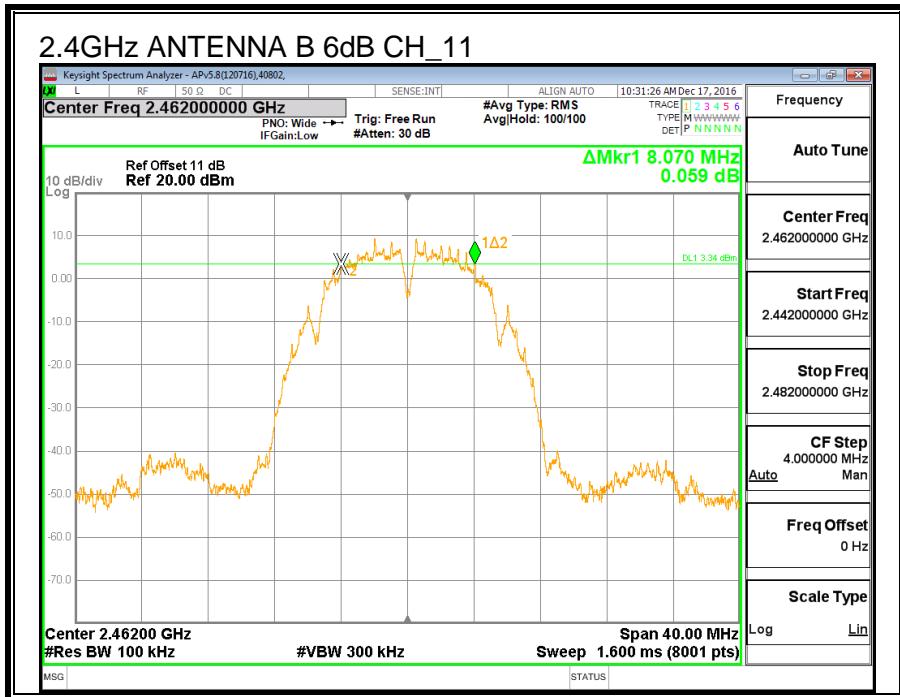

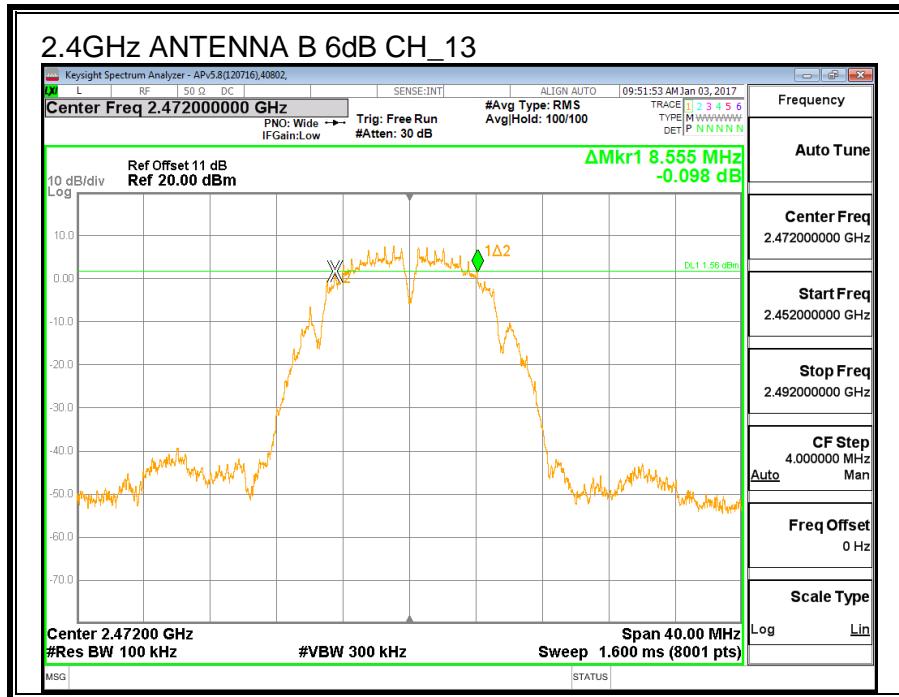



8.3.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

| Channel | Frequency (MHz) | 99% Bandwidth ANTENNA B (MHz) |
|----------|-----------------|-------------------------------|
| Low_1 | 2412 | 10.341 |
| Middle_6 | 2437 | 10.302 |
| High_11 | 2462 | 10.425 |
| High_12 | 2467 | 10.177 |
| High_13 | 2472 | 10.938 |

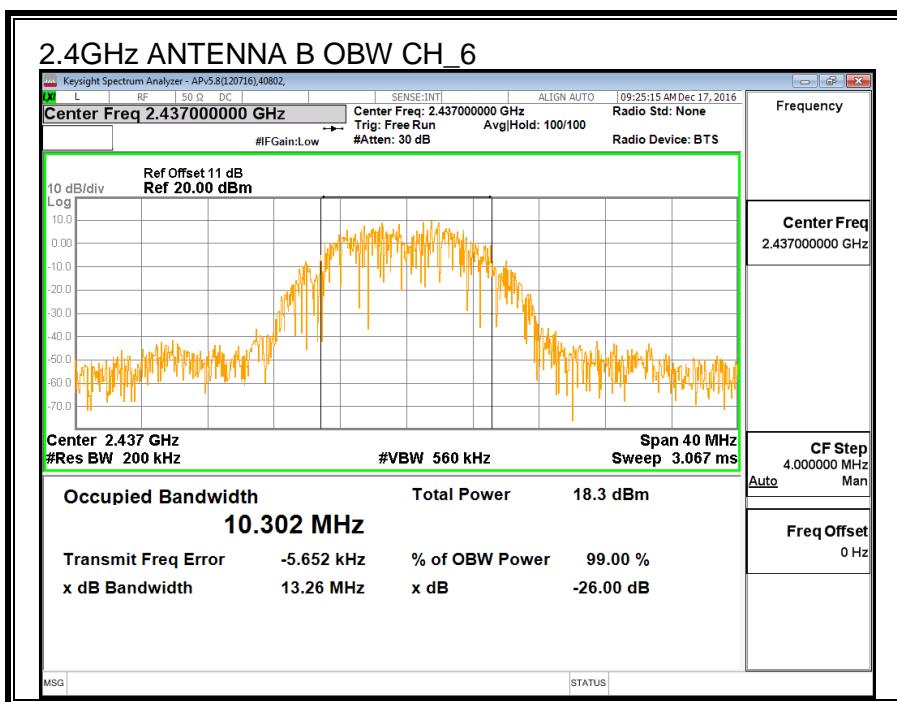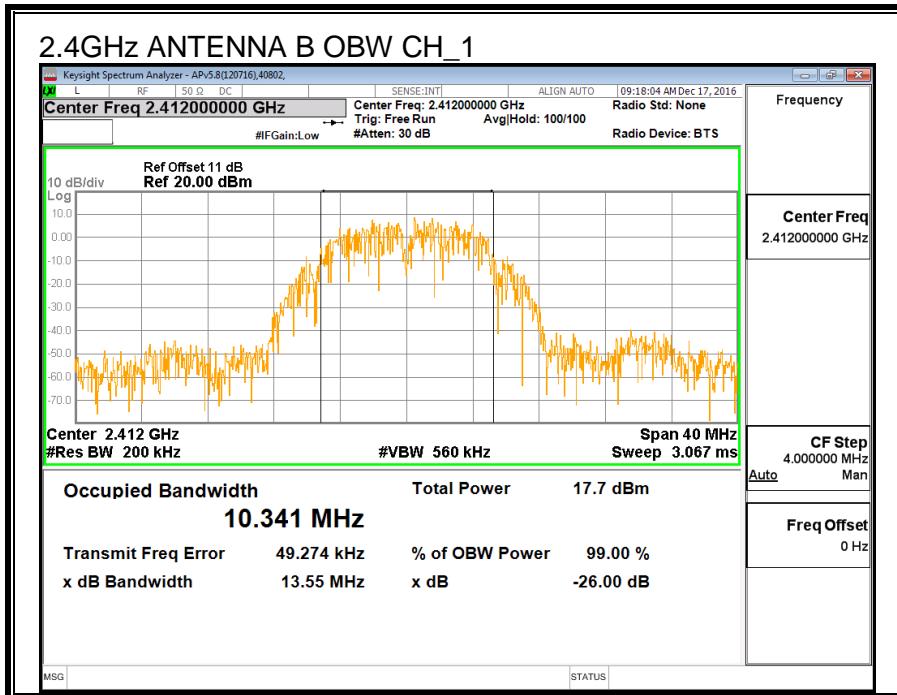

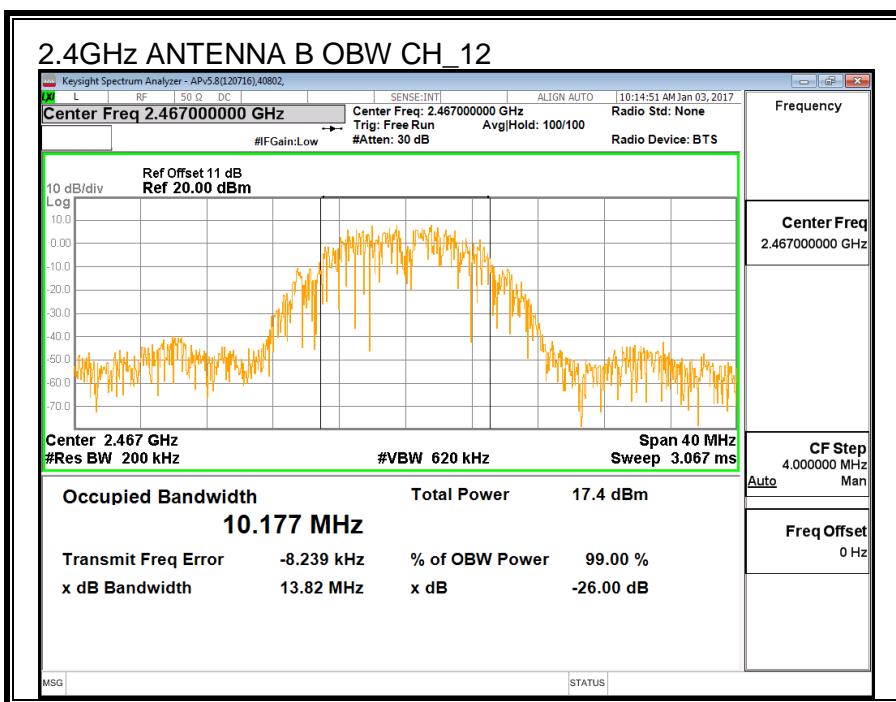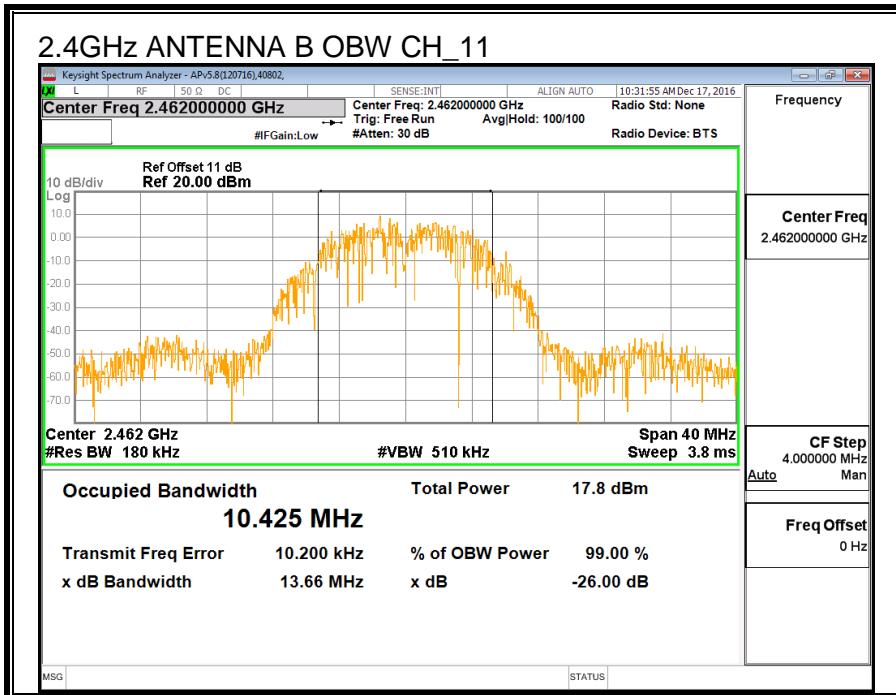

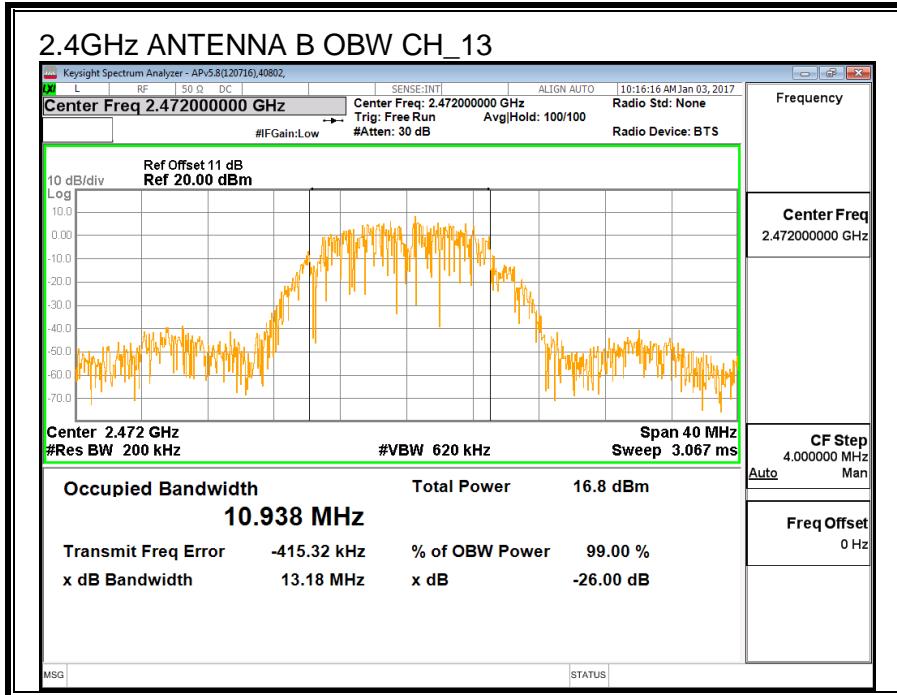

8.3.3. AVERAGE POWER

| | | | |
|-----|-------|-------|---------|
| ID: | 52291 | Date: | 1/20/17 |
|-----|-------|-------|---------|

LIMITS

None; for reporting purposes only.

RESULTS

| Channel | Frequency (MHz) | Power ANTENNA B (MHz) |
|----------|-----------------|-----------------------|
| Low_1 | 2412 | 18.78 |
| Middle_6 | 2437 | 18.87 |
| High_11 | 2462 | 18.21 |
| High_12 | 2467 | 17.39 |
| High_13 | 2472 | 14.30 |

8.3.4. OUTPUT POWER

| | | | |
|------------|-------|--------------|---------|
| ID: | 44353 | Date: | 1/31/17 |
|------------|-------|--------------|---------|

LIMITS

FCC §15.247(b) (3)

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Limits

| Channel | Frequency (MHz) | Directional Gain (dBi) | FCC Power Limit (dBm) | IC Power Limit (dBm) | IC EIRP Limit (dBm) | Max Power (dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low | 2412 | -0.01 | 30.00 | 30 | 36 | 30.00 |
| Mid | 2437 | -0.01 | 30.00 | 30 | 36 | 30.00 |
| High_11 | 2462 | -0.01 | 30.00 | 30 | 36 | 30.00 |
| High_12 | 2467 | -0.01 | 30.00 | 30 | 36 | 30.00 |
| High_13 | 2472 | -0.01 | 30.00 | 30 | 36 | 30.00 |

| | | |
|--------------------|------|--|
| Duty Cycle CF (dB) | 0.00 | Included in Calculations of Corr'd Power |
|--------------------|------|--|

Results

| Channel | Frequency (MHz) | Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Margin (dB) |
|---------|--------------------|------------------------|-----------------------------------|-------------------------|----------------|
| Low | 2412 | 22.55 | 22.55 | 30.00 | -7.45 |
| Mid | 2437 | 22.31 | 22.31 | 30.00 | -7.69 |
| High_11 | 2462 | 21.78 | 21.78 | 30.00 | -8.22 |
| High_12 | 2467 | 20.82 | 20.82 | 30.00 | -9.18 |
| High_13 | 2472 | 17.76 | 17.76 | 30.00 | -12.24 |

8.3.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)



For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.



RESULTS


| Duty Cycle CF (dB) | 0.00 | Included in Calculations of Corr'd PSD |
|--------------------|------|--|
|--------------------|------|--|

PSD Results

| Channel | Frequency (MHz) | Meas (dBm) | Total Corr'd PSD (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|------------|------------------------|-------------|-------------|
| Low | 2412 | -7.018 | -7.018 | 8.0 | -15.0 |
| Mid | 2437 | -4.816 | -4.816 | 8.0 | -12.8 |
| High_11 | 2462 | -6.543 | -6.543 | 8.0 | -14.5 |
| High_12 | 2467 | -4.280 | -4.280 | 8.0 | -12.3 |
| High_13 | 2472 | -9.000 | -9.000 | 8.0 | -17.0 |

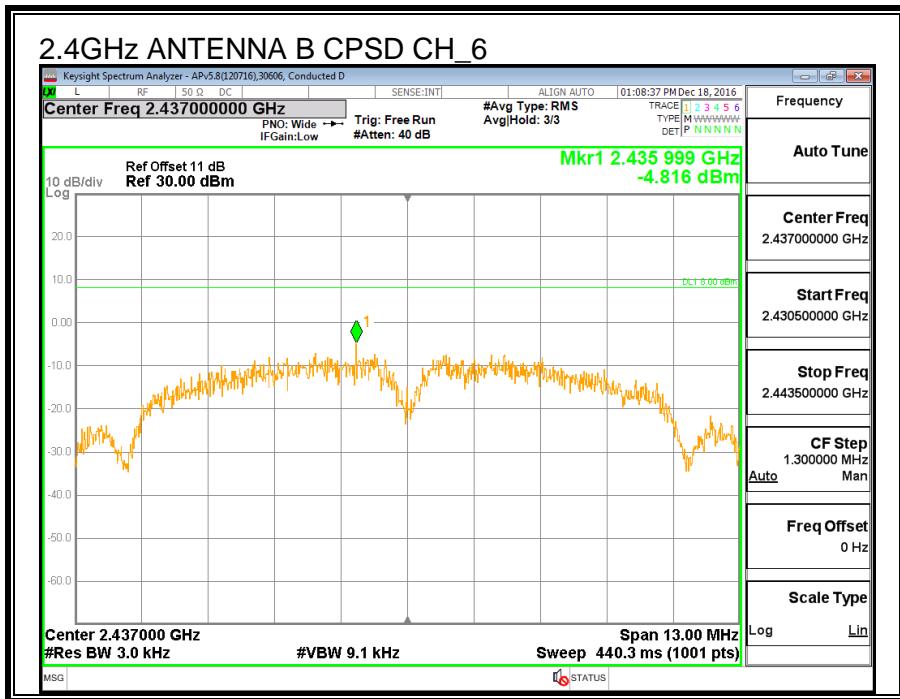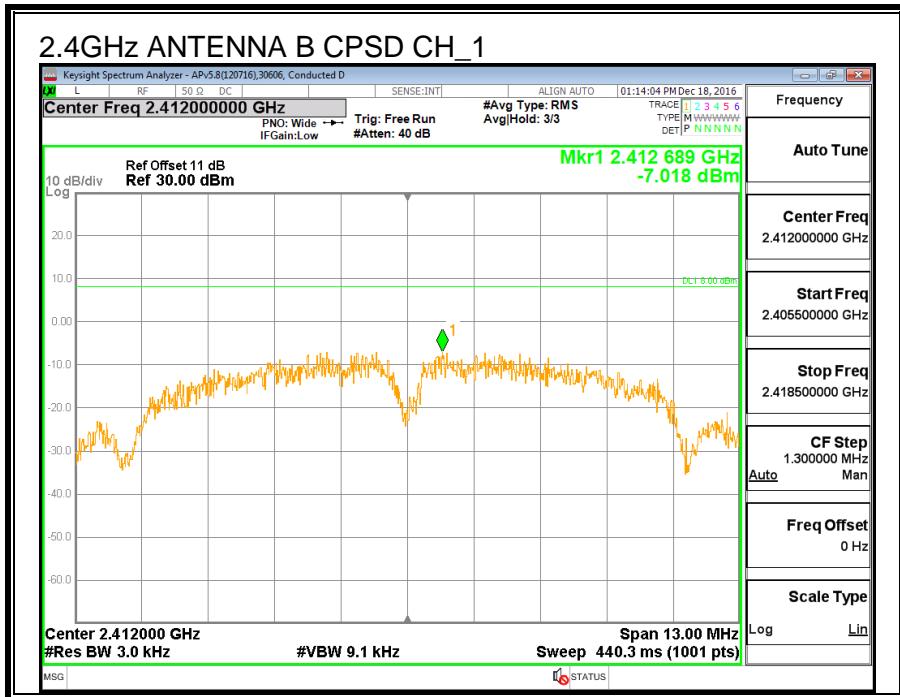

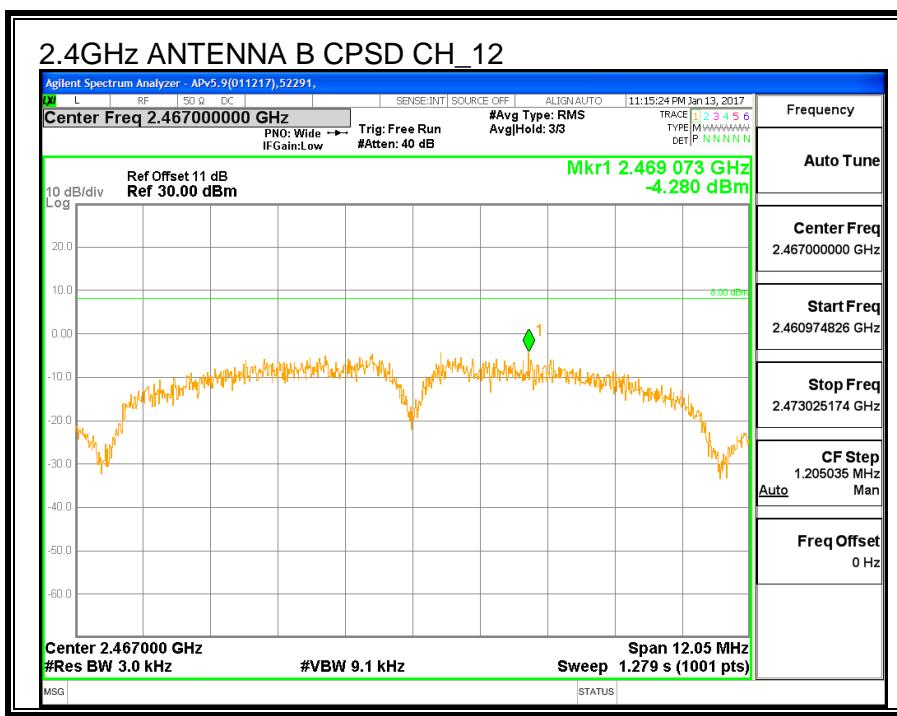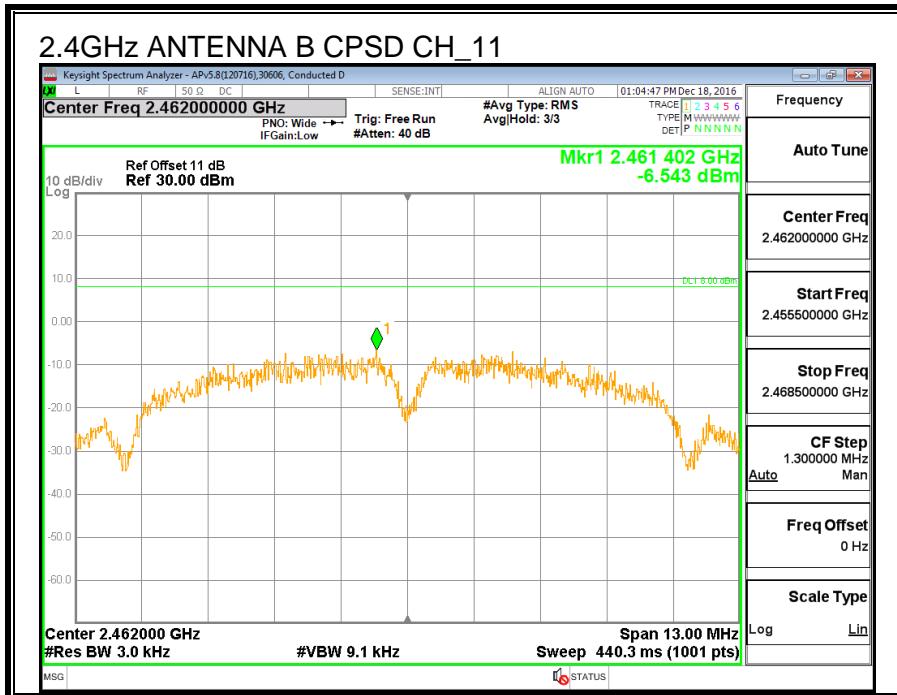

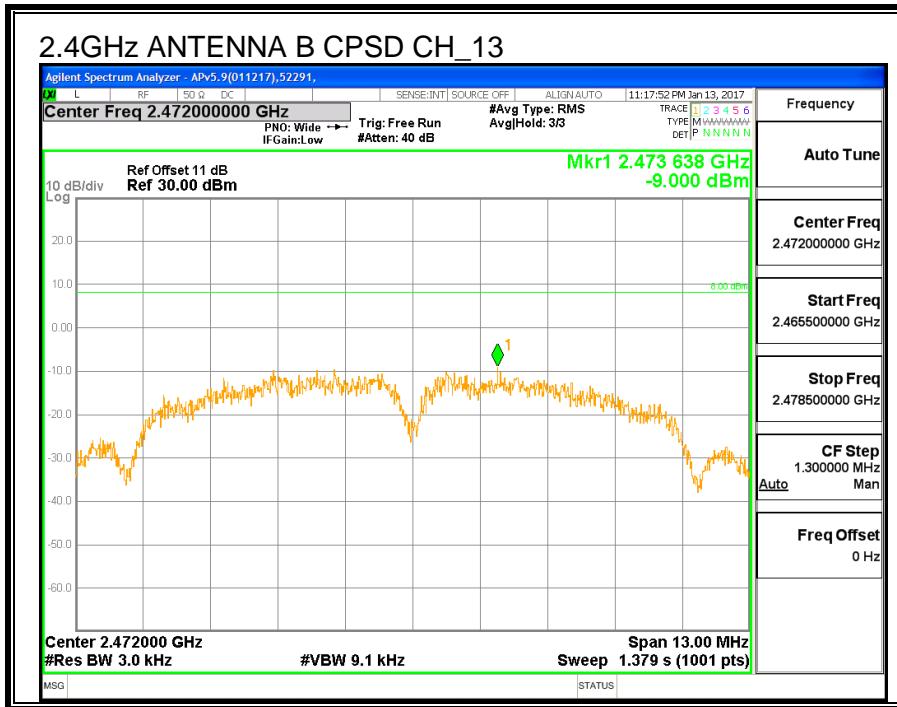



8.3.6. CONDUCTED BANDEdge AND SPURIOUS EMISSIONS



LIMITS



FCC §15.247 (d)



IC RSS-247 (5.5)



In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

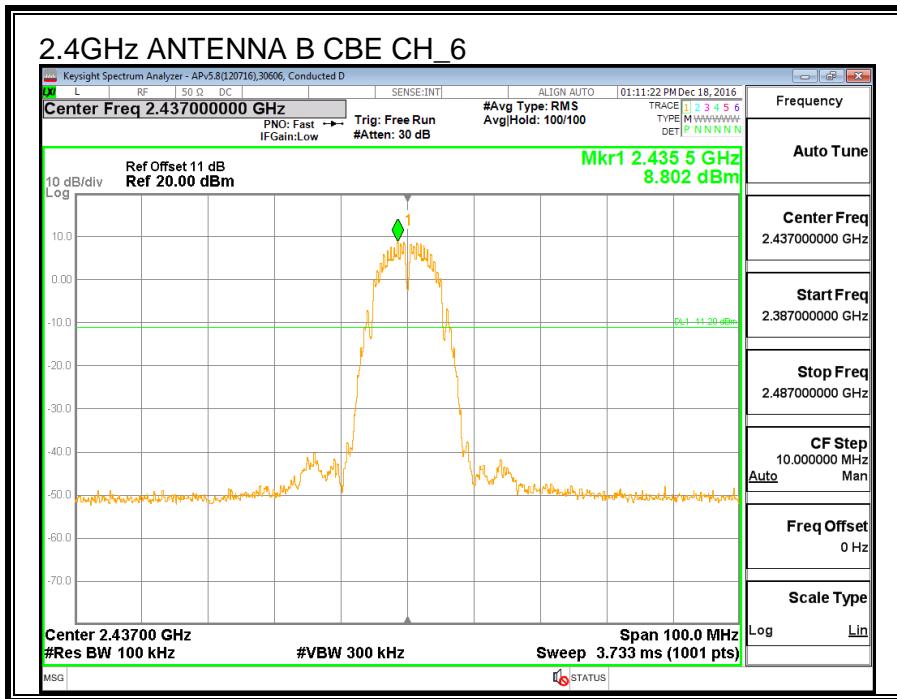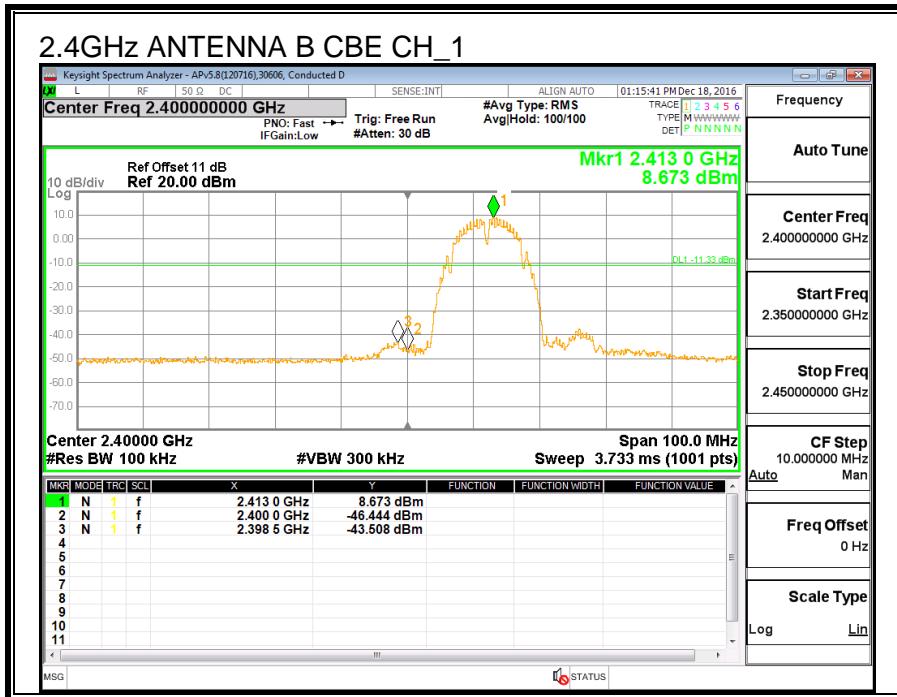

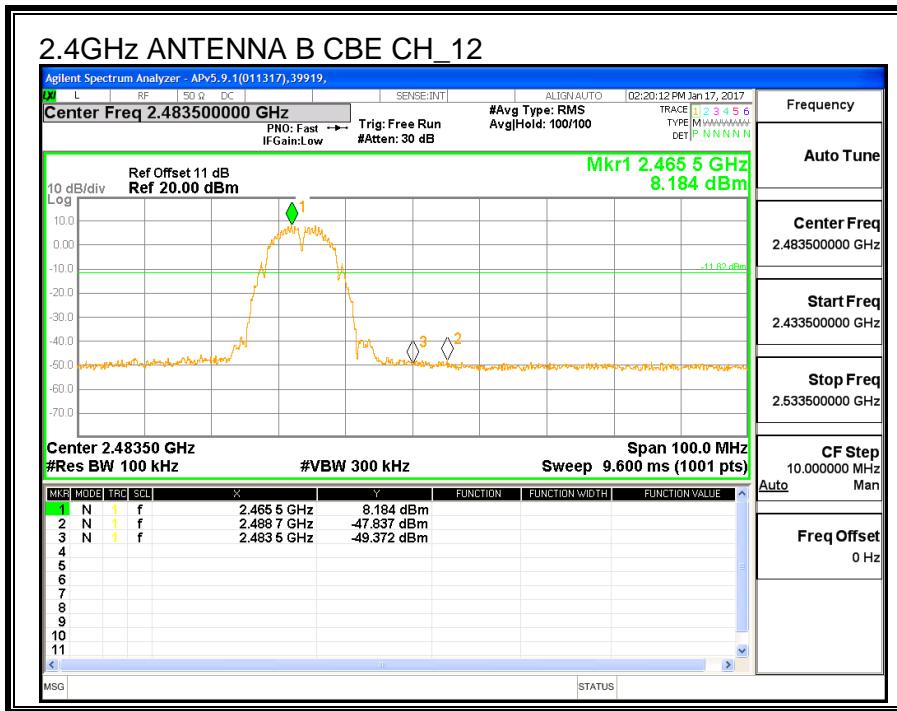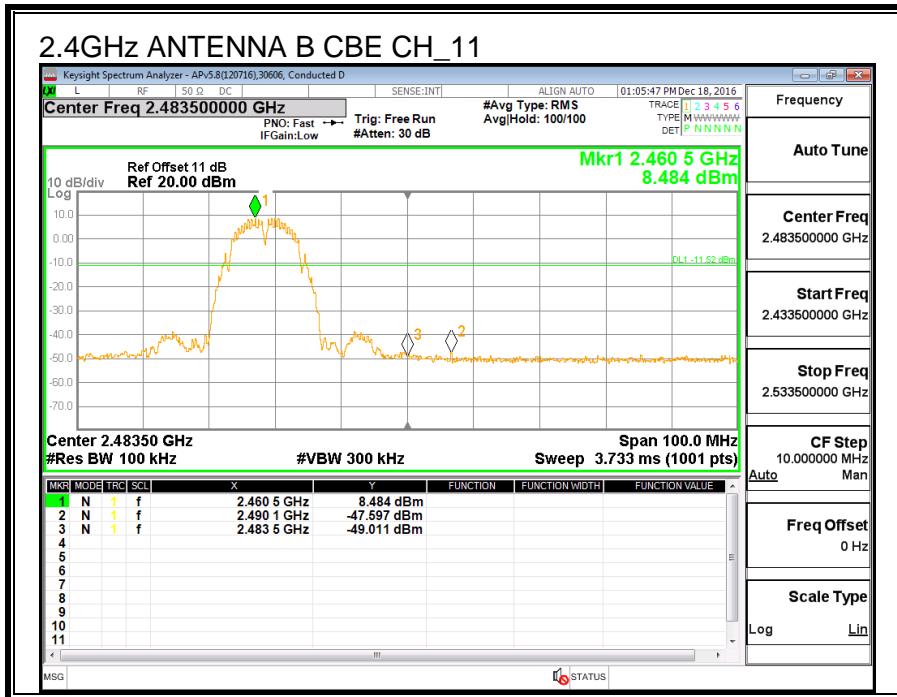

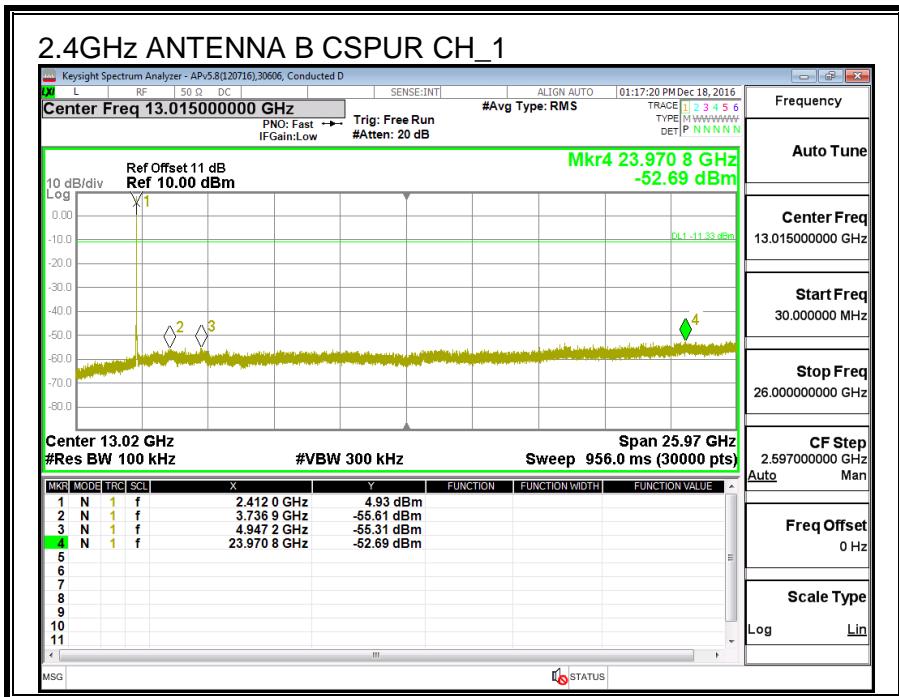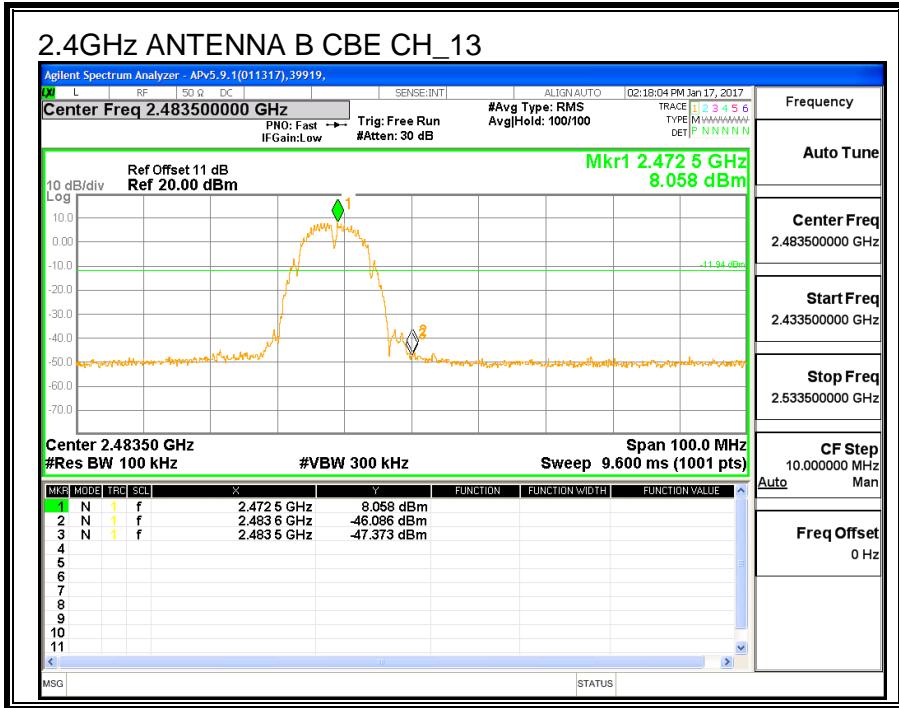

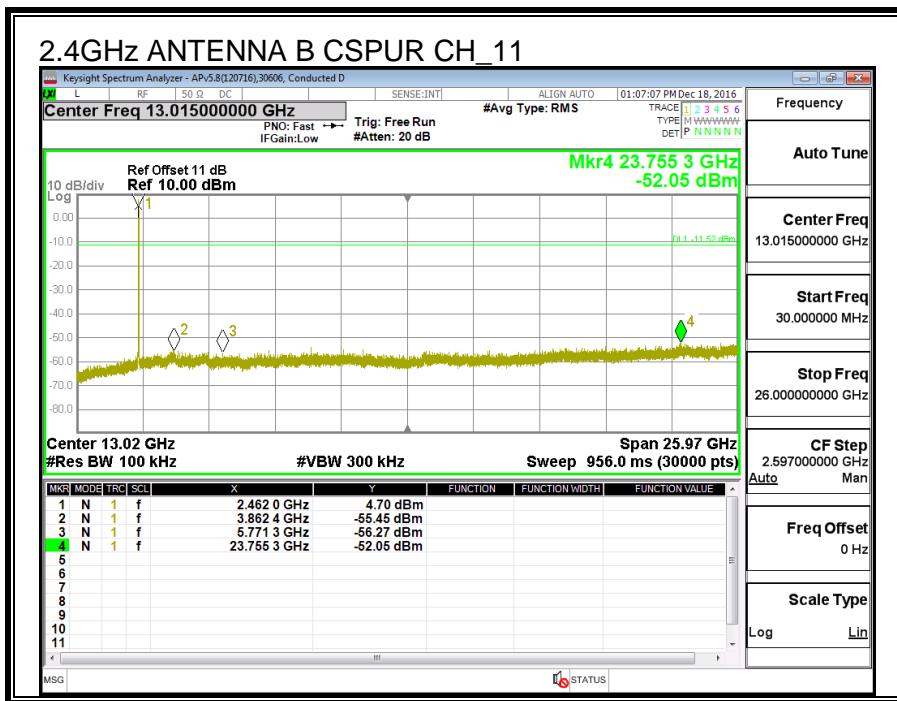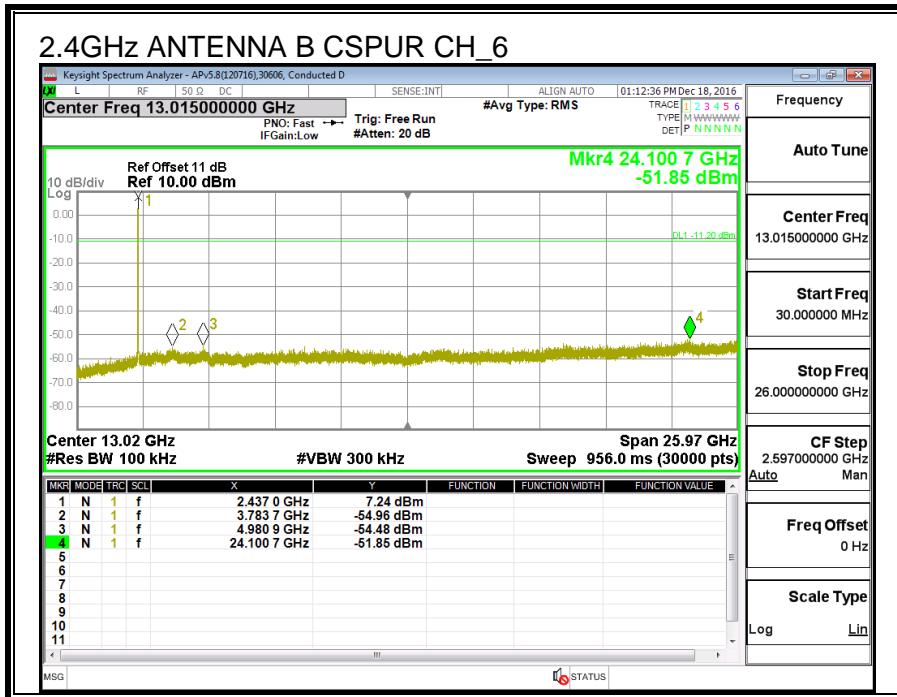

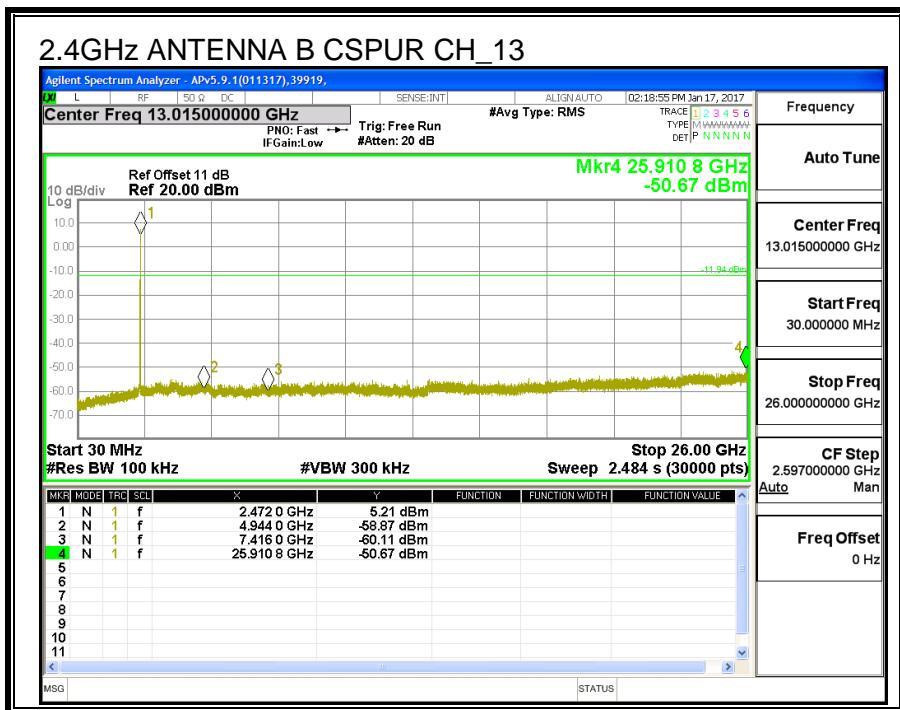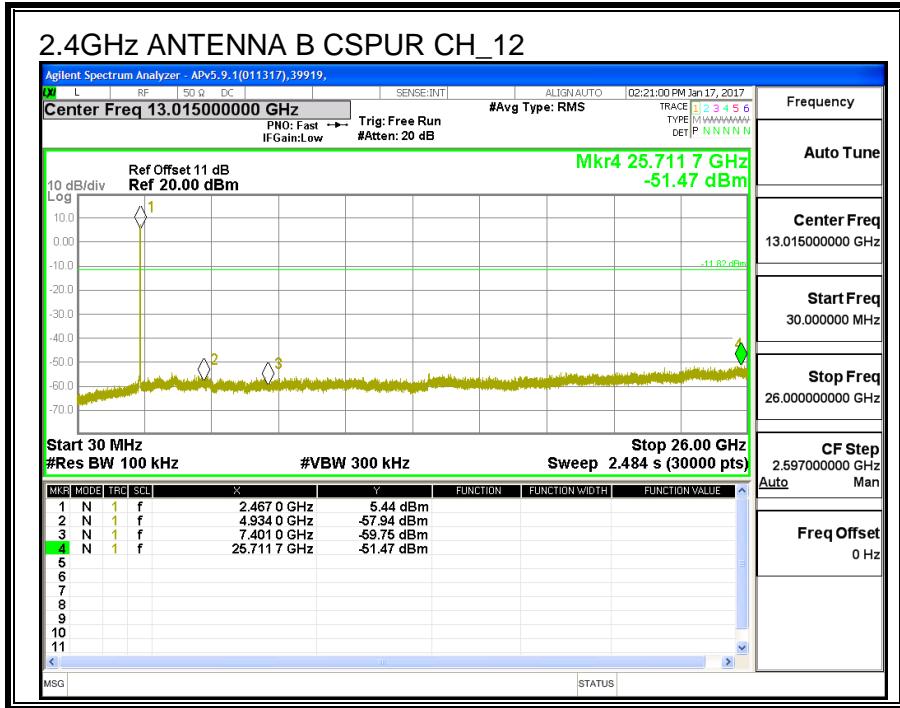

8.4. 11n HT20 ANTENNA A SISO MODE IN THE 2.4GHz BAND

8.4.1. 6 dB BANDWIDTH

LIMITS



FCC §15.247 (a) (2)



IC RSS-247 (5.2) (1)



The minimum 6 dB bandwidth shall be at least 500 kHz.


RESULTS

| Channel | Frequency | 6 dB BW ANTENNA A (MHz) | Minimum Limit (MHz) |
|----------|-----------|-------------------------------|------------------------|
| Low_1 | 2412 | 17.585 | 0.5 |
| Low_2 | 2417 | 17.295 | 0.5 |
| Middle_6 | 2437 | 17.565 | 0.5 |
| High_10 | 2457 | 17.550 | 0.5 |
| High_11 | 2462 | 17.580 | 0.5 |
| High_12 | 2467 | 17.555 | 0.5 |
| High_13 | 2472 | 17.575 | 0.5 |

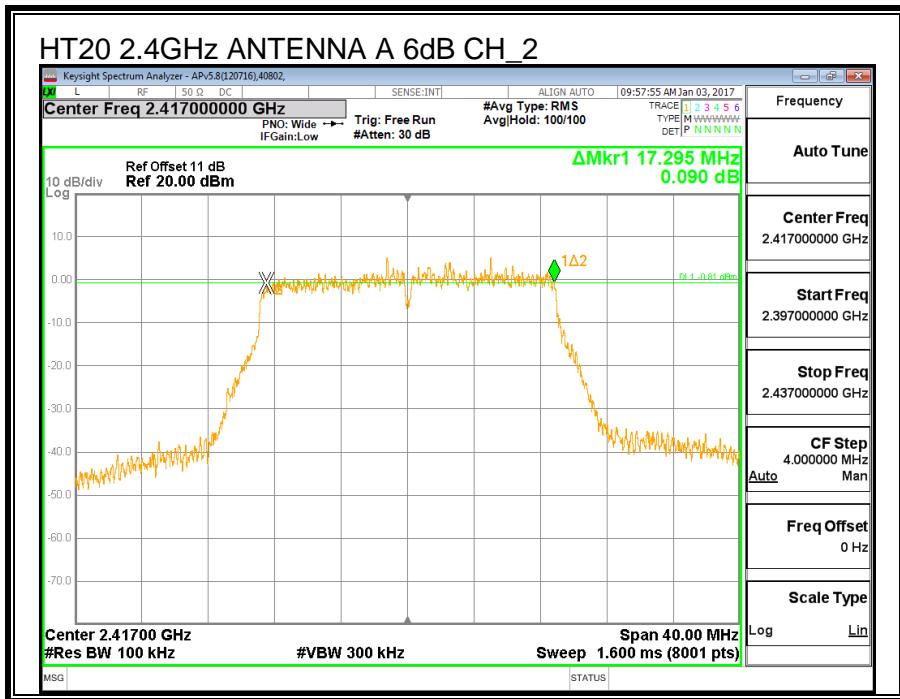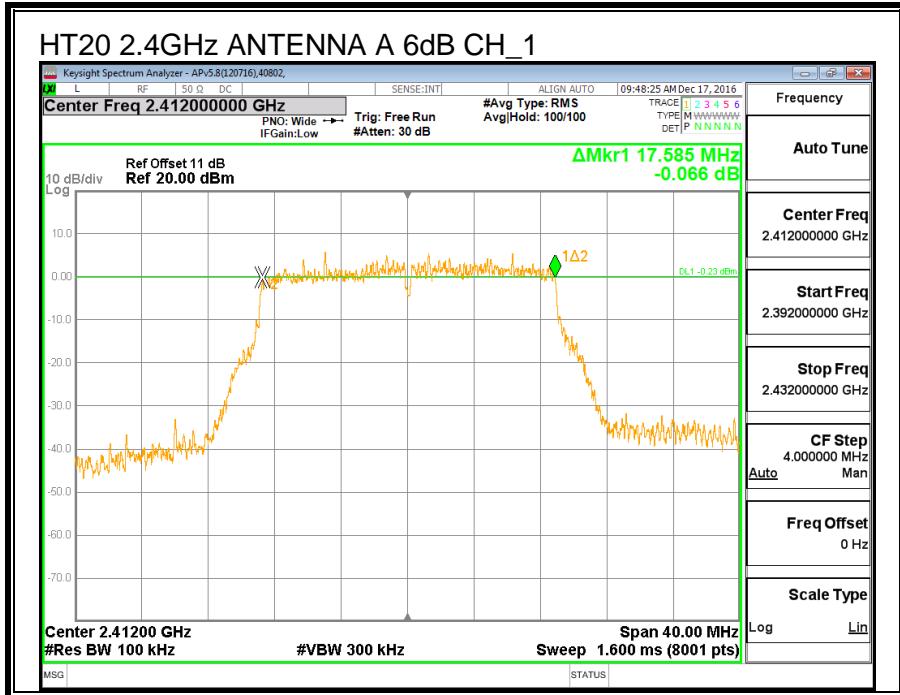

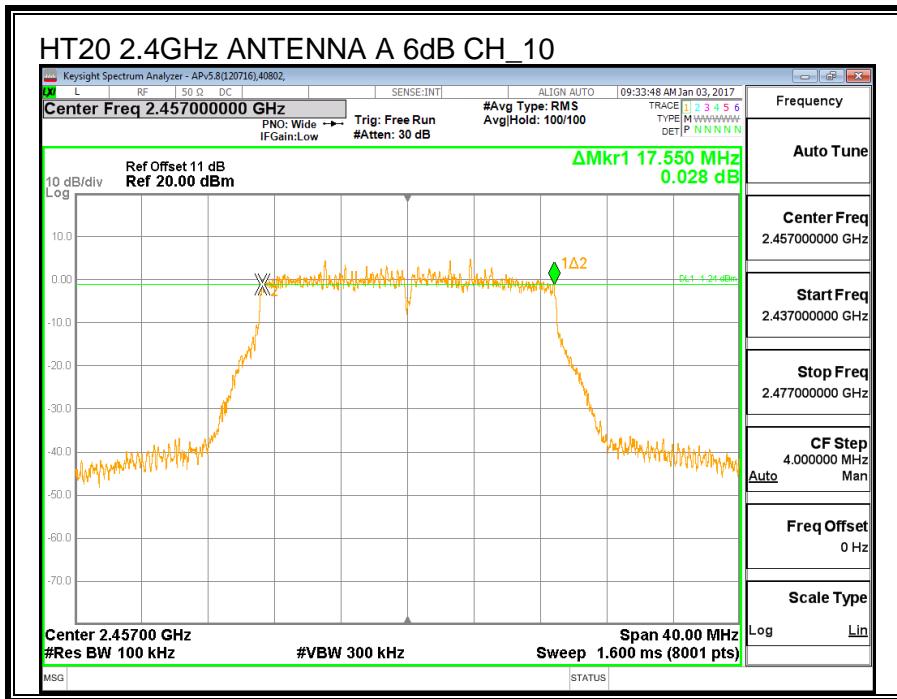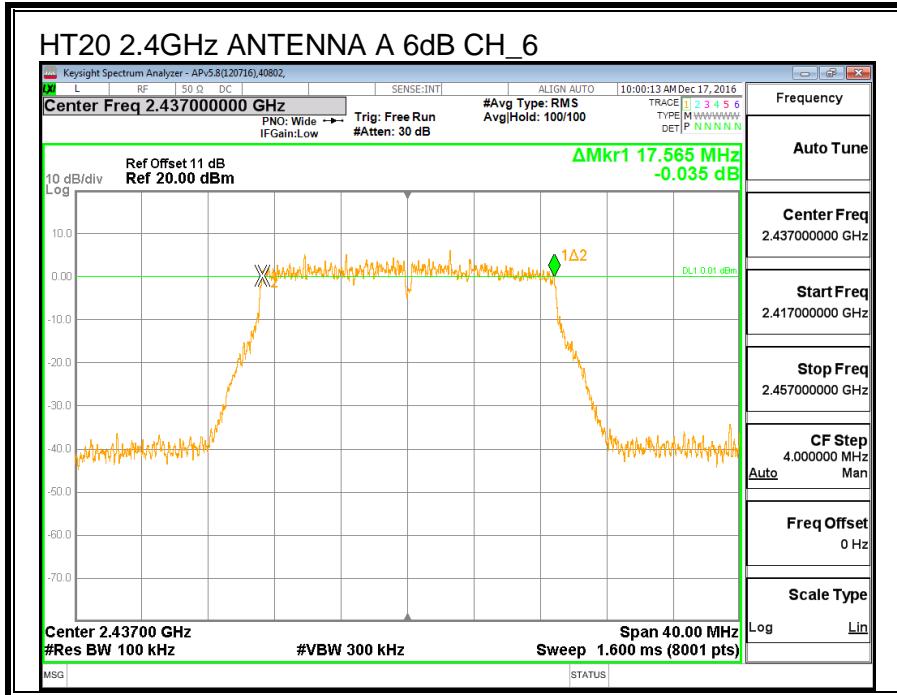

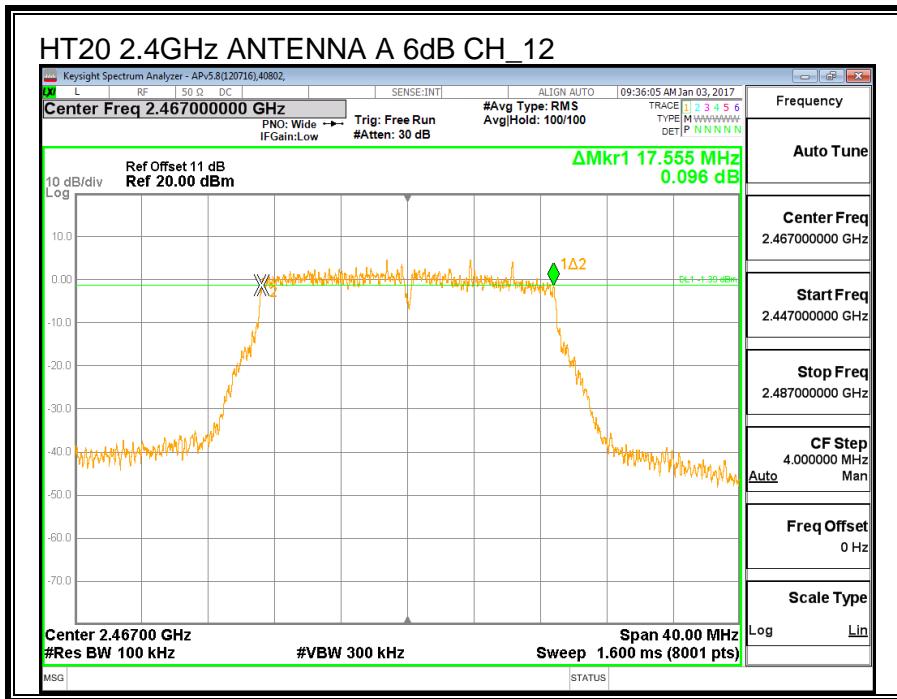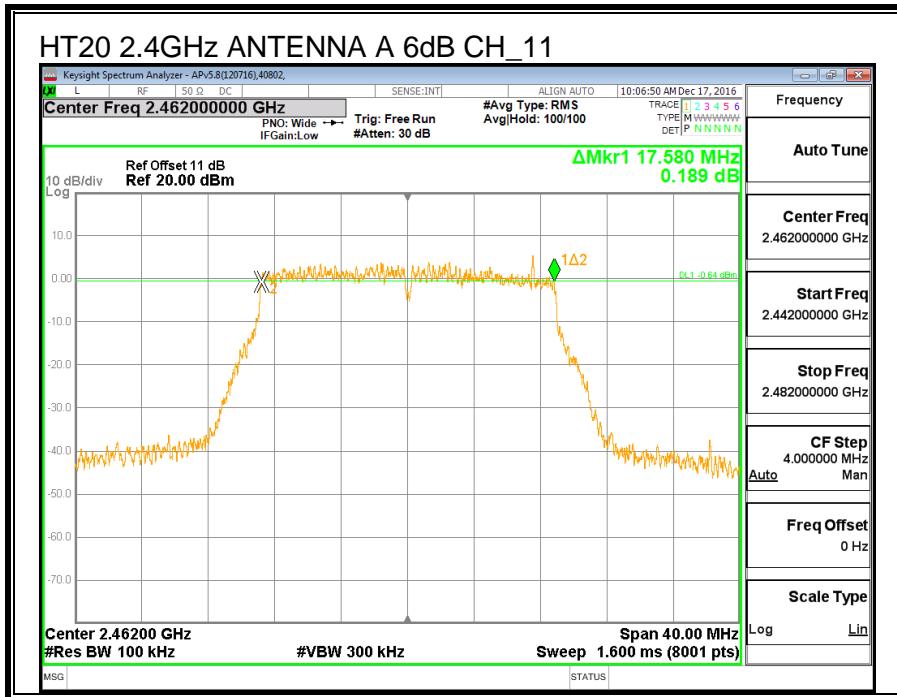

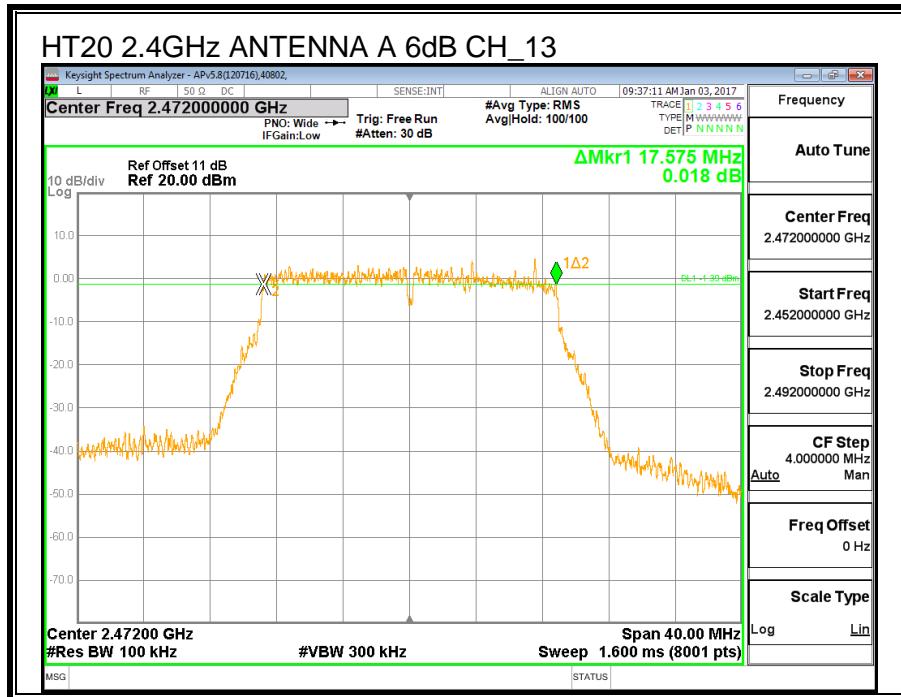



8.4.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.


RESULTS

| Channel | Frequency (MHz) | 99% Bandwidth ANTENNA A (MHz) |
|----------|-----------------|----------------------------------|
| Low_1 | 2412 | 17.777 |
| Low_2 | 2417 | 17.623 |
| Middle_6 | 2437 | 17.266 |
| High_10 | 2457 | 17.793 |
| High_11 | 2462 | 17.686 |
| High_12 | 2467 | 17.704 |
| High_13 | 2472 | 17.800 |

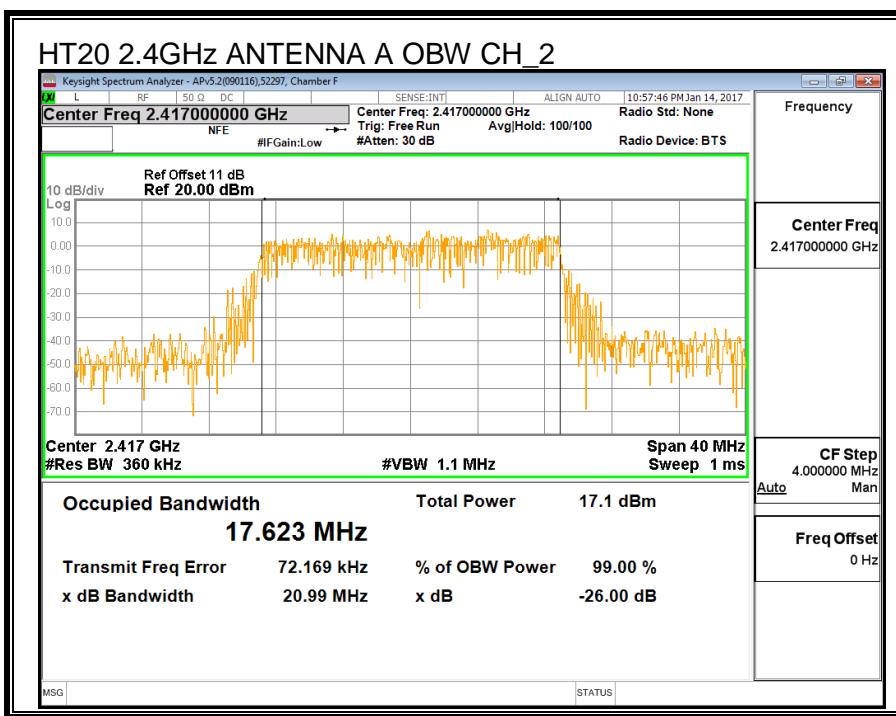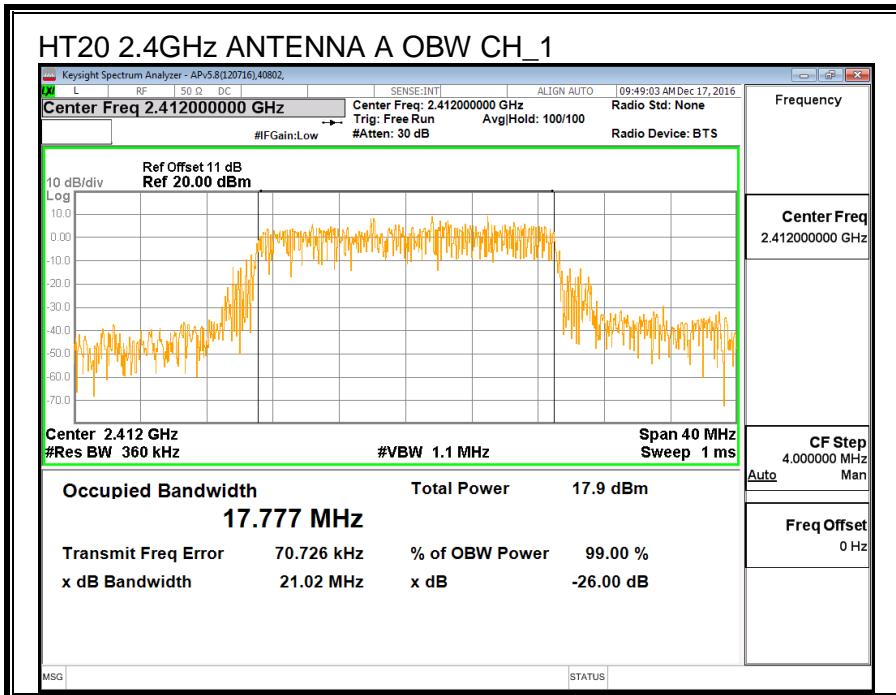

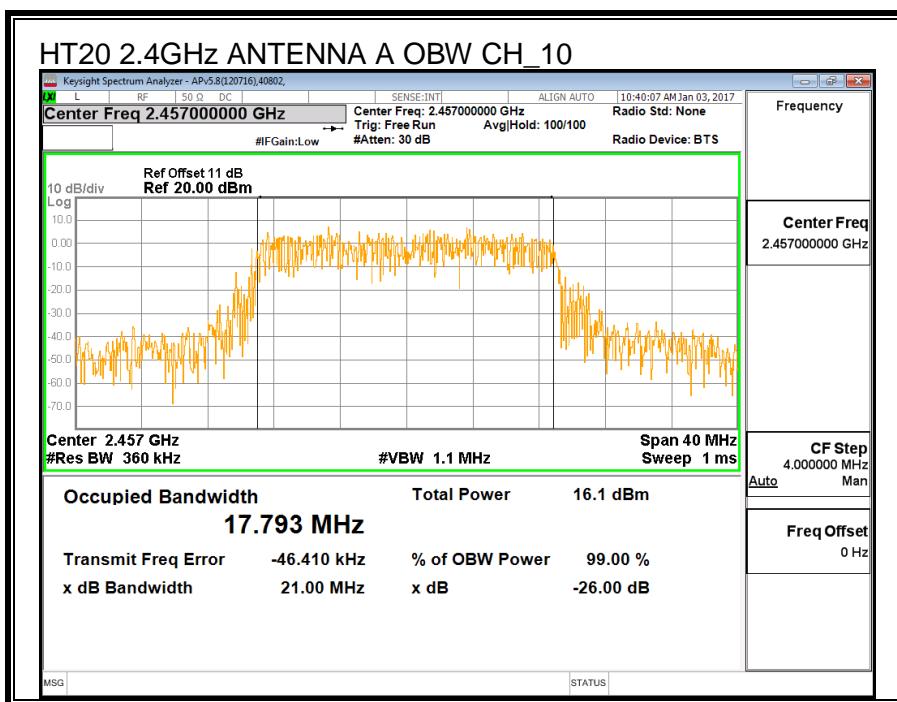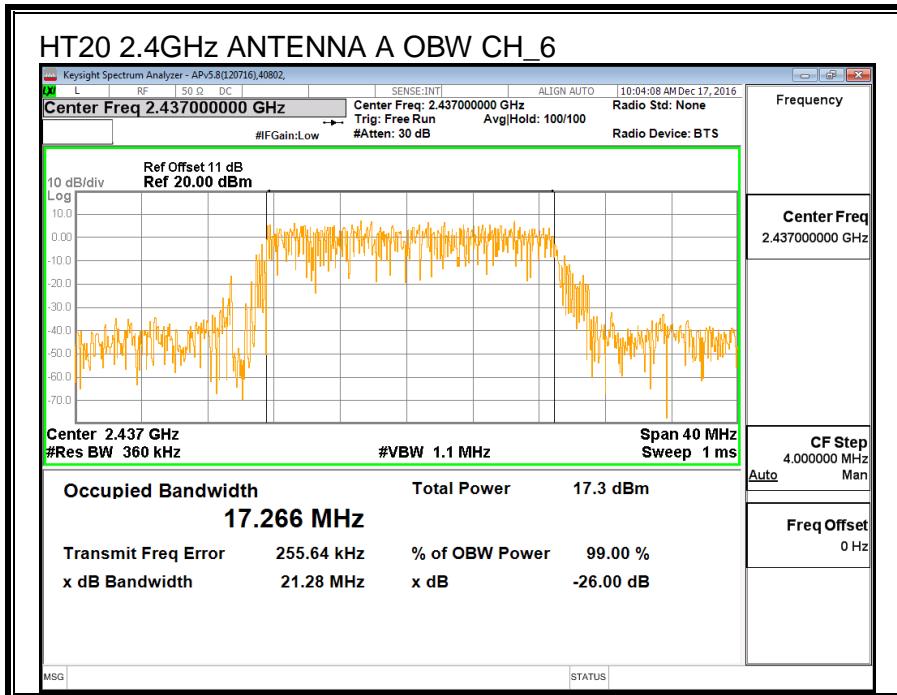

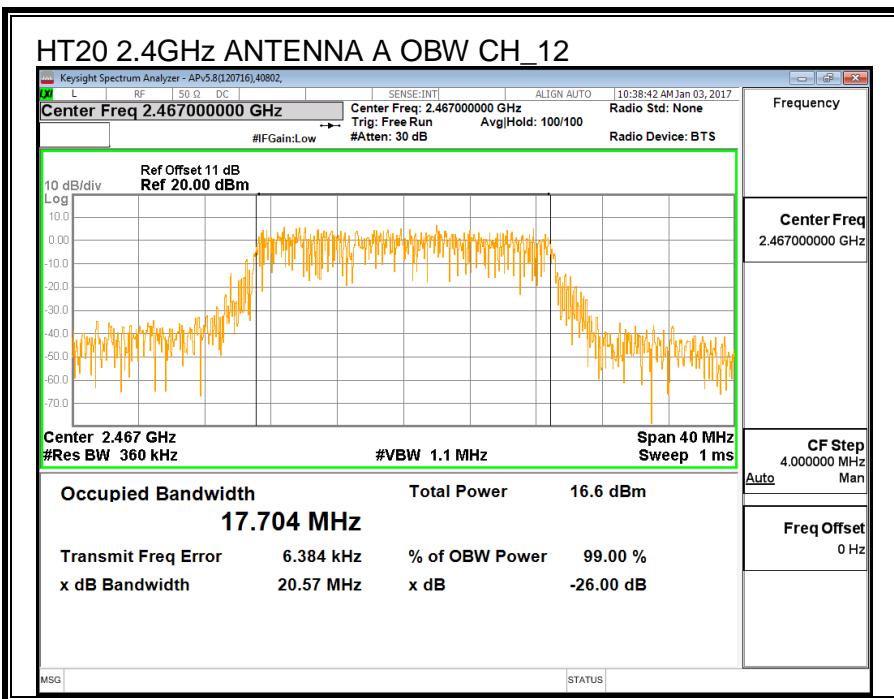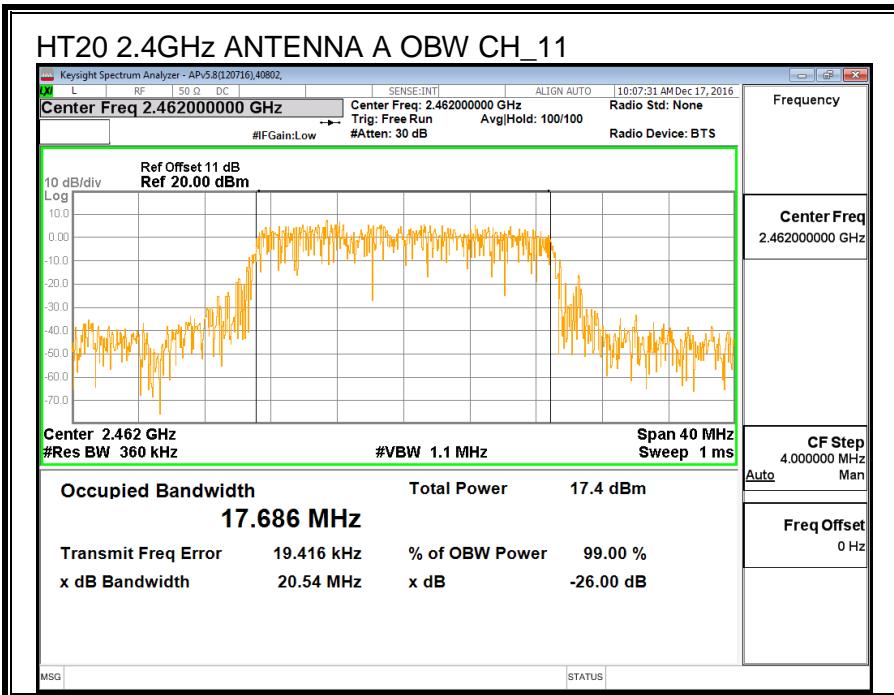

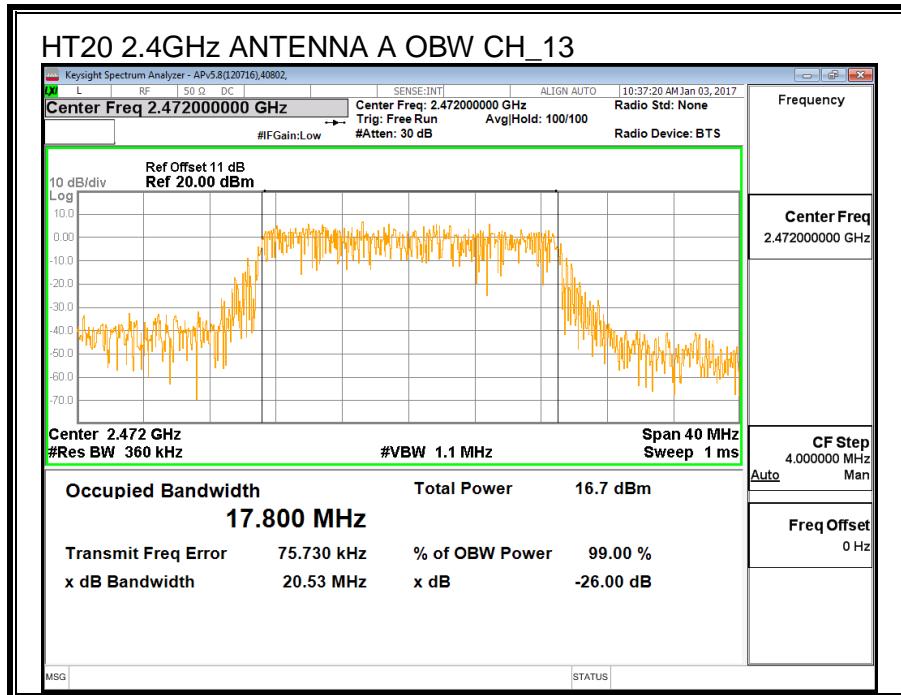

8.4.3. AVERAGE POWER

| | | | |
|-----|-------|-------|---------|
| ID: | 52291 | Date: | 1/20/17 |
|-----|-------|-------|---------|

LIMITS

None; for reporting purposes only.

RESULTS

| Channel | Frequency (MHz) | Power ANTENNA A (MHz) |
|----------|-----------------|-----------------------|
| Low_1 | 2412 | 13.81 |
| Low_2 | 2417 | 18.88 |
| Middle_6 | 2437 | 18.20 |
| High_10 | 2457 | 17.71 |
| High_11 | 2462 | 13.78 |
| High_12 | 2467 | 11.13 |
| High_13 | 2472 | 2.96 |

8.4.4. OUTPUT POWER

| | | | |
|-----|-------|-------|---------|
| ID: | 44353 | Date: | 1/31/17 |
|-----|-------|-------|---------|

LIMITS

FCC §15.247(b) (3)

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Limits

| Channel | Frequency (MHz) | Directional Gain (dBi) | FCC Power Limit (dBm) | IC Power Limit (dBm) | IC EIRP Limit (dBm) | Max Power (dBm) |
|---------|--------------------|------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------|
| Low_1 | 2412 | 1.0 | 30.00 | 30 | 36 | 30.00 |
| Low_2 | 2417 | 1.0 | 30.00 | 30 | 36 | 30.00 |
| Mid_6 | 2437 | 1.0 | 30.00 | 30 | 36 | 30.00 |
| High_10 | 2457 | 1.0 | 30.00 | 30 | 36 | 30.00 |
| High_11 | 2462 | 1.0 | 30.00 | 30 | 36 | 30.00 |
| High_12 | 2467 | 1.0 | 30.00 | 30 | 36 | 30.00 |
| High_13 | 2472 | 1.0 | 30.00 | 30 | 36 | 30.00 |

| | | |
|--------------------|------|--|
| Duty Cycle CF (dB) | 0.00 | Included in Calculations of Corr'd Power |
|--------------------|------|--|

Results

| Channel | Frequency (MHz) | Meas Power (dBm) | Total Corr'd Power (dBm) | Power Limit (dBm) | Margin (dB) |
|---------|--------------------|------------------------|-----------------------------------|-------------------------|----------------|
| Low_1 | 2412 | 23.15 | 23.15 | 30.00 | -6.85 |
| Low_2 | 2417 | 25.61 | 25.61 | 30.00 | -4.39 |
| Mid_6 | 2437 | 25.77 | 25.77 | 30.00 | -4.23 |
| High_10 | 2457 | 25.8 | 25.80 | 30.00 | -4.20 |
| High_11 | 2462 | 23.76 | 23.76 | 30.00 | -6.24 |
| High_12 | 2467 | 21.07 | 21.07 | 30.00 | -8.93 |
| High_13 | 2472 | 12.72 | 12.72 | 30.00 | -17.28 |

8.4.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.

RESULTS

| Duty Cycle CF (dB) | 0.00 | Included in Calculations of Corr'd PSD |
|--------------------|------|--|
|--------------------|------|--|

PSD Results

| Channel | Frequency (MHz) | Meas (dBm) | Total Corr'd PSD (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|------------|------------------------|-------------|-------------|
| Low_1 | 2412 | -6.676 | -6.676 | 8.0 | -14.7 |
| Low_2 | 2417 | -6.447 | -6.447 | 8.0 | -14.4 |
| Mid | 2437 | -7.279 | -7.279 | 8.0 | -15.3 |
| High_10 | 2457 | -6.533 | -6.533 | 8.0 | -14.5 |
| High_11 | 2462 | -9.532 | -9.532 | 8.0 | -17.5 |
| High_12 | 2467 | -13.350 | -13.350 | 8.0 | -21.4 |
| High_13 | 2472 | -23.177 | -23.177 | 8.0 | -31.2 |

