



SAR EVALUATION REPORT

FCC 47 CFR § 2.1093
IEEE Std 1528-2013

For
Tablet Device

FCC ID: BCGA1822
Model Name: A1822

Report Number: 16U23813-S1V5
Issue Date: 3/6/2017

Prepared for
APPLE, INC.
1 INFINITE LOOP, MS 26A
CUPERTINO, CA 95014-2084

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

| Rev. | Date | Revisions | Revised By |
|------|-----------|---|-------------|
| V1 | 2/9/2017 | Initial Issue | -- |
| V2 | 2/10/2017 | Report revised based on Reviewer's comments: 1. Sec. 6.1 & Appendix A: updated device dimensions and device description. 2. Updated Chain 0 & 1 nomenclature to Antenna A & B, respectively. 3. Sec. 6.3.: corrected notes 4. Sec. 7.1.: Updated notes and tables | Kenneth Mak |
| V3 | 2/13/2017 | Report revised based on Reviewer's comments: 1. Sec. 12: Updated Edge 1 separation distance in table. | Kenneth Mak |
| V4 | 2/16/2017 | Report revised based on Reviewer's comments: 1. Sec. 6.1. & Appendix A: Updated display diagonal dimension. | Kenneth Mak |
| V5 | 3/6/2017 | Report revised based on Reviewer's comments: 1. Sec. 6.1.: Updated | Kenneth Mak |

Table of Contents

| | |
|---|-----------|
| 1. Attestation of Test Results | 5 |
| 2. Test Specification, Methods and Procedures..... | 6 |
| 3. Facilities and Accreditation | 6 |
| 4. SAR Measurement System & Test Equipment | 7 |
| 4.1. <i>SAR Measurement System.....</i> | 7 |
| 4.2. <i>SAR Scan Procedures.....</i> | 8 |
| 4.3. <i>Test Equipment.....</i> | 10 |
| 5. Measurement Uncertainty..... | 12 |
| 6. Device Under Test (DUT) Information | 13 |
| 6.1. <i>DUT Description</i> | 13 |
| 6.2. <i>Wireless Technologies.....</i> | 13 |
| 6.3. <i>Nominal and Maximum Output Power from Tune-up Procedure</i> | 14 |
| 6.3.1. <i>WLAN SISO.....</i> | 14 |
| 6.3.2. <i>WLAN MIMO</i> | 18 |
| 6.3.3. <i>Bluetooth</i> | 22 |
| 7. RF Exposure Conditions (Test Configurations)..... | 23 |
| 7.1. <i>Standalone SAR Test Exclusion Considerations.....</i> | 24 |
| 7.2. <i>Required Test Configurations</i> | 25 |
| 8. Dielectric Property Measurements & System Check | 26 |
| 8.1. <i>Dielectric Property Measurements</i> | 26 |
| 8.2. <i>System Check.....</i> | 30 |
| 9. Conducted Output Power Measurements..... | 32 |
| 9.1. <i>Wi-Fi S/ISO.....</i> | 32 |
| 9.2. <i>WLAN MIMO</i> | 33 |
| 9.3. <i>Bluetooth</i> | 34 |
| 10. Measured and Reported (Scaled) SAR Results..... | 35 |
| 10.1. <i>Wi-Fi (DTS Band).....</i> | 36 |
| 10.2. <i>Wi-Fi (U-NII-2A Band)</i> | 36 |
| 10.3. <i>Wi-Fi (U-NII-2C Band)</i> | 37 |
| 10.4. <i>Wi-Fi (U-NII-3 Band).....</i> | 37 |
| 10.5. <i>Bluetooth (P_{High}).....</i> | 38 |
| 10.6. <i>Bluetooth (P_{Low})</i> | 38 |
| 11. SAR Measurement Variability..... | 39 |


| | |
|--|-----------|
| 12. Simultaneous Transmission SAR Analysis..... | 40 |
| 12.1. <i>Sum of the SAR for Wi-Fi and BT.....</i> | 42 |
| Appendices | 43 |
| 16U23813-S1V3 SAR_App A Setup Photos (STC_180days) | 43 |
| 16U23813-S1V1 SAR_App B System Check Plots | 43 |
| 16U23813-S1V1 SAR_App C Highest Test Plots | 43 |
| 16U23813-S1V1 SAR_App D Tissue Ingredients | 43 |
| 16U23813-S1V1 SAR_App E Probe Cal. Certificates..... | 43 |
| 16U23813-S1V1 SAR_App F Dipole Cal. Certificates | 43 |

1. Attestation of Test Results

| | | | | |
|--|---|------|------|------|
| Applicant Name | APPLE, INC. | | | |
| FCC ID | BCGA1822 | | | |
| Model Name | A1822 | | | |
| Applicable Standards | FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013 | | | |
| Exposure Category | SAR Limits (W/Kg) Peak spatial-average(1g of tissue) | | | |
| General population / Uncontrolled exposure | 1.6 | | | |
| RF Exposure Conditions | Equipment Class - Highest Reported SAR (W/kg) | | | |
| | PCE | DTS | NII | DSS |
| Standalone | N/A | 1.12 | 1.18 | 1.17 |
| Simultaneous TX | N/A | N/A | 1.38 | 1.38 |
| Date Tested | 12/5/2016 to 12/15/2016 | | | |
| Test Results | Pass | | | |

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.
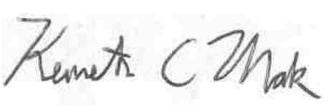
| | |
|---|--|
| Approved & Released By: | Prepared By: |
|  |  |
| Bobby Bayani Senior Engineer UL Verification Services Inc. | Kenneth C. Mak Laboratory Engineer UL Verification Services Inc. |

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 447498 D03 Supplement C Cross-Reference v01
- 616217 D04 SAR for laptop and tablets v01r02
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02

Additional Guidance: Manufacturer KDB enquiry.

- KDB guidance related to power control mechanism for Bluetooth transmitters based on the operational state of the Wi-Fi transmitters. Bluetooth P_{low} is triggered when 5 GHz Wi-Fi is on. Functional description of this mode is provided in technical description documents.

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at


| 47173 Benicia Street | 47266 Benicia Street |
|----------------------|----------------------|
| SAR Lab A | SAR Lab 1 |
| SAR Lab B | SAR Lab 2 |
| SAR Lab C | SAR Lab 3 |
| SAR Lab D | SAR Lab 4 |
| SAR Lab E | |
| SAR Lab F | |
| SAR Lab G | |
| SAR Lab H | |

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

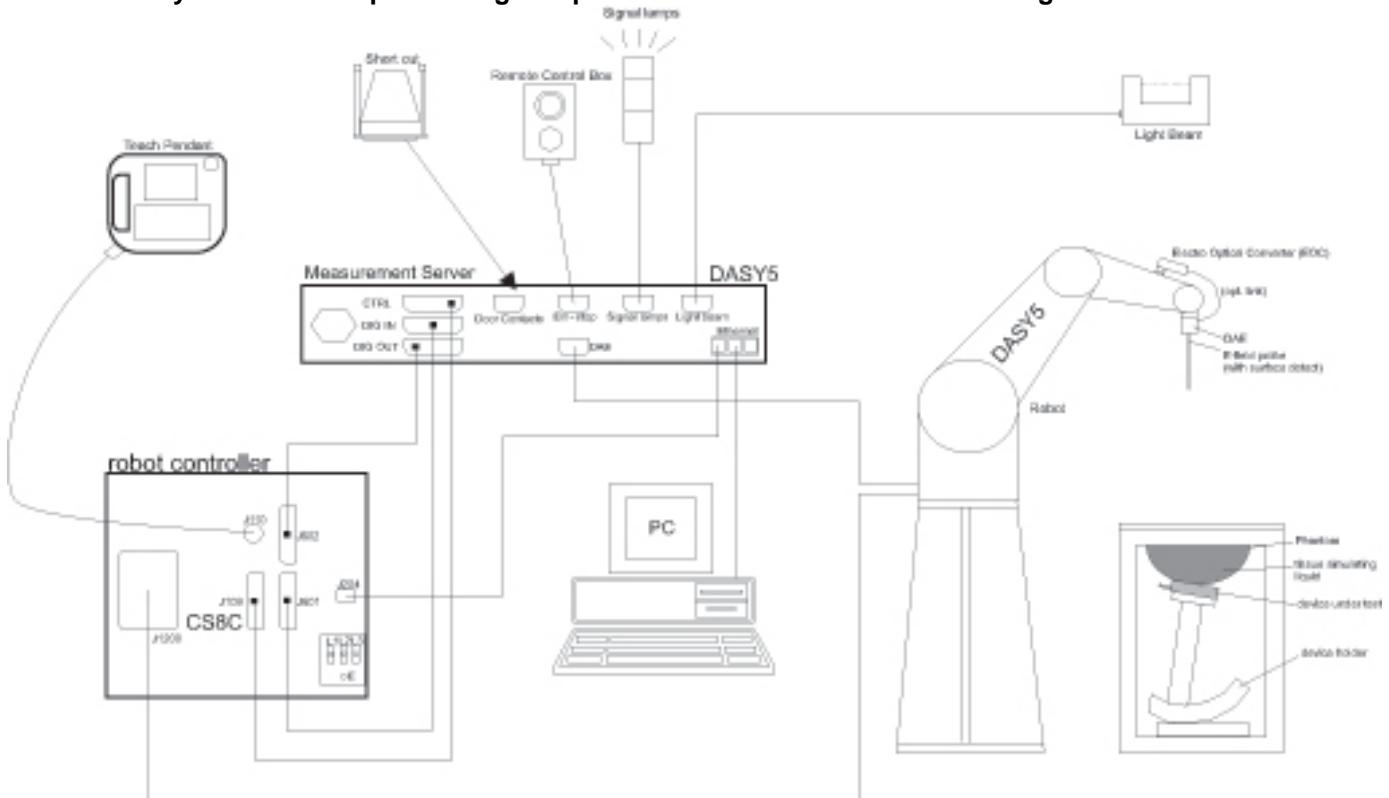

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

| | ≤ 3 GHz | > 3 GHz |
|--|--|--|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface | 5 ± 1 mm | $\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location | $30^\circ \pm 1^\circ$ | $20^\circ \pm 1^\circ$ |
| | ≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm | $3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm |
| Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$ | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device. | |

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

| | | ≤ 3 GHz | > 3 GHz |
|---|------------------------------------|--|--|
| Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom} | | ≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm* | 3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm* |
| Maximum zoom scan spatial resolution, normal to phantom surface | uniform grid: $\Delta z_{Zoom}(n)$ | | 3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm |
| | graded grid | ≤ 5 mm $\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface $\Delta z_{Zoom}(n>1)$: between subsequent points | ≤ 4 mm ≤ 1.5 · $\Delta z_{Zoom}(n-1)$ |
| Minimum zoom scan volume | x, y, z | ≥ 30 mm | 3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm |

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

* When zoom scan is required and the *reported* SAR from the *area scan based 1-g SAR estimation* procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

| Name of Equipment | Manufacturer | Type/Model | Serial No. | Cal. Due Date |
|----------------------|-----------------------------------|---------------|---------------|---------------|
| Network Analyzer | Agilent | 8753ES | MY40000980 | 4/27/2017 |
| Dielectric Probe kit | SPEAG | DAK-3.5 | 1103 | 2/23/2017 |
| Shorting block | SPEAG | DAK-3.5 Short | SM DAK 200 BA | N/A |
| Thermometer | Traceable Calibration Control Co. | 4242 | 140493798 | 8/9/2017 |

System Check

| Name of Equipment | Manufacturer | Type/Model | Serial No. | Cal. Due Date |
|------------------------------|--------------|------------------------|-------------|---------------|
| Synthesized Signal Generator | Agilent | N5181A | MY50140610 | 5/9/2017 |
| Power Meter | Keysight | N1912A | MY55196008 | 5/3/2017 |
| Power Sensor | Agilent | N1912A | MY52200012 | 10/17/2017 |
| Power Sensor | Agilent | E9323A | MY53070009 | 6/13/2017 |
| Amplifier | MITEQ | AMF-4D-00400600-50-30P | 1795093 | N/A |
| Directional coupler | Werlatone | C8060-102 | 2149 | N/A |
| DC Power Supply | BK PRECISION | 1161 | 215-02292 | N/A |
| Synthesized Signal Generator | Agilent | N5181A | MY50140630 | 5/9/2017 |
| Power Meter | Keysight | N1912A | MY55196009 | 5/3/2017 |
| Power Sensor | Agilent | N1912A | MY53260001 | 10/17/2017 |
| Power Sensor | Agilent | E9323A | MY53070002 | 3/22/2017 |
| Amplifier | MITEQ | AMF-4D-00400600-50-30P | 1795092 | N/A |
| Directional coupler | Werlatone | C8060-102 | 2141 | N/A |
| DC Power Supply | HP | 6296A | 2841A-05955 | N/A |
| Synthesized Signal Generator | HP | 8665B | 3546A00784 | 9/2/2017 |
| Power Meter | HP | 437B | 3125U11347 | 8/30/2017 |
| Power Meter | HP | 437B | 3125U09516 | 9/27/2017 |
| Power Sensor | HP | 8481A | 1926A16917 | 10/7/2017 |
| Power Sensor | HP | 8481A | 2702A76223 | 9/14/2017 |
| Amplifier | MITEQ | AMF-4D-00400600-50-30P | 1808938 | N/A |
| Directional coupler | Werlatone | C8060-102 | 2710 | N/A |
| DC Power Supply | HP | E3610A | KR24104150 | N/A |

Lab Equipment

| Name of Equipment | Manufacturer | Type/Model | Serial No. | Cal. Due Date |
|--|--------------|------------|------------|---------------|
| E-Field Probe (SAR Lab A) | SPEAG | EX3DV4 | 3885 | 9/20/2017 |
| E-Field Probe (SAR Lab B) | SPEAG | EX3DV4 | 3991 | 5/12/2017 |
| E-Field Probe (SAR Lab C) | SPEAG | EX3DV4 | 3902 | 5/17/2017 |
| E-Field Probe (SAR Lab D) | SPEAG | EX3DV4 | 3936 | 7/26/2017 |
| E-Field Probe (SAR Lab E) | SPEAG | EX3DV4 | 7335 | 3/22/2017 |
| E-Field Probe (SAR Lab F) | SPEAG | EX3DV4 | 3686 | 8/25/2017 |
| E-Field Probe (SAR Lab G) | SPEAG | EX3DV4 | 3990 | 3/22/2017 |
| E-Field Probe (SAR Lab H) | SPEAG | EX3DV4 | 3929 | 3/22/2017 |
| Data Acquisition Electronics (SAR Lab A) | SPEAG | DAE4 | 1439 | 7/25/2017 |
| Data Acquisition Electronics (SAR Lab B) | SPEAG | DAE4 | 1257 | 9/15/2017 |
| Data Acquisition Electronics (SAR Lab C) | SPEAG | DAE3 | 500 | 5/19/2017 |
| Data Acquisition Electronics (SAR Lab D) | SPEAG | DAE4 | 1433 | 3/17/2017 |
| Data Acquisition Electronics (SAR Lab E) | SPEAG | DAE4 | 1472 | 3/24/2017 |
| Data Acquisition Electronics (SAR Lab F) | SPEAG | DAE4 | 1377 | 9/14/2017 |
| Data Acquisition Electronics (SAR Lab G) | SPEAG | DAE4 | 1380 | 7/25/2017 |
| Data Acquisition Electronics (SAR Lab H) | SPEAG | DAE4 | 1434 | 4/15/2017 |
| System Validation Dipole | SPEAG | D2450V2 | 899 | 3/15/2017 |
| System Validation Dipole | SPEAG | D2450V2 | 706 | 5/10/2017 |
| System Validation Dipole | SPEAG | D5GHzV2 | 1003 | 2/25/2017 |
| System Validation Dipole | SPEAG | D5GHzV2 | 1138 | 9/22/2017 |
| System Validation Dipole | SPEAG | D5GHzV2 | 1168 | 11/14/2017 |

Other

| Name of Equipment | Manufacturer | Type/Model | Serial No. | Cal. Due Date |
|-------------------|--------------|------------|------------|---------------|
| Power Meter | Keysight | N1912A | MY55196004 | 7/8/2017 |
| Power Sensor | Agilent | N1921A | MY53020038 | 3/22/2017 |
| Power Sensor | Agilent | N1921A | MY53260010 | 8/23/2017 |
| Power Meter | Keysight | N1912A | My55196007 | 7/8/2017 |
| Power Sensor | Agilent | N1921A | MY55200002 | 3/22/2017 |
| Power Sensor | Agilent | N1921A | MY52200012 | 10/17/2017 |

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

6. Device Under Test (DUT) Information

6.1. DUT Description

Model A1822 is a tablet with multimedia functions (music, application support, and video)

IEEE 802.11a/b/g/n/ac radio (MIMO 2x2) and Bluetooth radio

The device has multiple Wi-Fi / Bluetooth antennas; Wi-Fi transmits out of two antennas, Antenna A and Antenna B, while Bluetooth transmits just out of Antenna A.

There are two vendors of the Wi-Fi/Bluetooth radio modules to support the production volumes of the device. The two variants are referenced in this report as:

Variant 1 = Wi-Fi/BT module supplier 1

Variant 2 = Wi-Fi/BT module supplier 2

The Wi-Fi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Complete SAR evaluation is performed on the device with one Wi-Fi/Bluetooth radio module, and then the test is repeated on the device with the other Wi-Fi/Bluetooth module at the highest SAR value.

| | |
|------------------|--|
| Device Dimension | Overall (Length x Width): 240 mm x 169.5 mm Overall Diagonal: 285 mm Display Diagonal: 246.4 mm |
| Back Cover | <input checked="" type="checkbox"/> The rechargeable battery is not user accessible. |
| Battery Options | <input checked="" type="checkbox"/> The rechargeable battery is not user accessible. |
| AirPlay | AirPlay mode enabled devices transfer data directly between each other <input checked="" type="checkbox"/> AirPlay (Wi-Fi 2.4 GHz) <input checked="" type="checkbox"/> AirPlay (Wi-Fi 5 GHz) |

6.2. Wireless Technologies

| Wireless technologies | Frequency bands | Operating mode | Duty Cycle used for SAR testing |
|---|-----------------|---|---------------------------------|
| Wi-Fi | 2.4 GHz | 802.11b 802.11g 802.11n (HT20) | 100% |
| | 5 GHz | 802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80) | 100% |
| Does this device support bands 5.60 ~ 5.65 GHz? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No | | | |
| Does this device support Band gap channel? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No | | | |
| Bluetooth | 2.4 GHz | Version 4.2 + LE | 77.5% (DH5) |

6.3. Nominal and Maximum Output Power from Tune-up Procedure

KDB 447498 sec.4.1 (d) at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit

6.3.1. WLAN SISO

| Band (GHz) | Mode | No. of Transmitters | Ch # | Freq. (MHz) | Max RF Output Power (dBm) | | SAR Test (Yes/No) |
|------------|---------|---------------------|------|-------------|---------------------------|-----------|-------------------|
| | | | | | Antenna A | Antenna B | |
| 2.4 | 802.11b | 1 Tx | 1 | 2412 | 16.0 | 15.5 | Yes |
| | | | 6 | 2437 | 16.0 | 15.5 | |
| | | | 11 | 2462 | 16.0 | 15.5 | |
| | | | 12 | 2467 | 16.0 | 15.5 | |
| | | | 13 | 2472 | 14.5 | 14.5 | |
| | 802.11g | 1 Tx | 1 | 2412 | 15.0 | 15.0 | No |
| | | | 2 | 2417 | 16.0 | 15.5 | |
| | | | 3 | 2422 | 16.0 | 15.5 | |
| | | | 6 | 2437 | 16.0 | 15.5 | |
| | | | 9 | 2452 | 16.0 | 15.5 | |
| | | | 10 | 2457 | 16.0 | 15.5 | |
| | | | 11 | 2462 | 13.5 | 13.5 | |
| | | | 12 | 2467 | 12.0 | 12.0 | |
| | | | 13 | 2472 | 4.0 | 4.0 | |
| | 802.11n | 1 Tx HT20 | 1 | 2412 | 15.0 | 15.0 | No |
| | | | 2 | 2417 | 16.0 | 15.5 | |
| | | | 3 | 2422 | 16.0 | 15.5 | |
| | | | 6 | 2437 | 16.0 | 15.5 | |
| | | | 9 | 2452 | 16.0 | 15.5 | |
| | | | 10 | 2457 | 16.0 | 15.5 | |
| | | | 11 | 2462 | 13.5 | 13.5 | |
| | | | 12 | 2467 | 12.0 | 12.0 | |
| | | | 13 | 2472 | 4.0 | 4.0 | |

| Band (GHz) | Mode | No. of Transmitters | Ch # | Freq. (MHz) | Max RF Output Power (dBm) | | SAR Test (Yes/No) |
|------------|----------|---------------------|------|-------------|---------------------------|-----------|-------------------|
| | | | | | Antenna A | Antenna B | |
| 5.2 | 802.11a | 1 Tx | 36 | 5180 | 16.0 | 16.0 | No |
| | | | 40 | 5200 | 16.5 | 16.5 | |
| | | | 44 | 5220 | 16.5 | 16.5 | |
| | | | 48 | 5240 | 16.5 | 16.5 | |
| 5.2 | 802.11n | 1 Tx HT20 | 36 | 5180 | 16.0 | 16.0 | No |
| | | | 40 | 5200 | 16.5 | 16.5 | |
| | | | 44 | 5220 | 16.5 | 16.5 | |
| | | | 48 | 5240 | 16.5 | 16.5 | |
| | 802.11n | 1 Tx HT40 | 38 | 5190 | 14.5 | 14.5 | No |
| | | | 46 | 5230 | 16.5 | 16.5 | |
| 5.2 | 802.11ac | 1 Tx VHT20 | 36 | 5180 | 16.0 | 16.0 | No |
| | | | 40 | 5200 | 16.5 | 16.5 | |
| | | | 44 | 5220 | 16.5 | 16.5 | |
| | | | 48 | 5240 | 16.5 | 16.5 | |
| | 802.11ac | 1 Tx VHT40 | 38 | 5190 | 14.5 | 14.5 | No |
| | | | 46 | 5230 | 16.5 | 16.5 | |
| | | 1 Tx VHT80 | 42 | 5210 | 14.0 | 14.0 | No |

Note(s):

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11 a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

| Band (GHz) | Mode | No. of Transmitters | Ch # | Freq. (MHz) | Max RF Output Power (dBm) | | SAR Test (Yes/No) |
|------------|-----------|---------------------|------|-------------|---------------------------|-----------|-------------------|
| | | | | | Antenna A | Antenna B | |
| 5.3 | 802.11a | 1 Tx | 52 | 5260 | 17.0 | 17.0 | No |
| | | | 56 | 5280 | 17.0 | 17.0 | |
| | | | 60 | 5300 | 17.0 | 17.0 | |
| | | | 64 | 5320 | 16.0 | 16.0 | |
| | 802.11n | 1 Tx HT20 | 52 | 5260 | 17.0 | 17.0 | No |
| | | | 56 | 5280 | 17.0 | 17.0 | |
| | | | 60 | 5300 | 17.0 | 17.0 | |
| | | | 64 | 5320 | 16.0 | 16.0 | |
| | 1 Tx HT40 | 54 | 5270 | 17.0 | 17.0 | Yes | |
| | | 62 | 5310 | 14.5 | 14.5 | | |
| | 802.11ac | 1 Tx VHT20 | 52 | 5260 | 17.0 | 17.0 | No |
| | | | 56 | 5280 | 17.0 | 17.0 | |
| | | | 60 | 5300 | 17.0 | 17.0 | |
| | | | 64 | 5320 | 16.0 | 16.0 | |
| | | 1 Tx VHT40 | 54 | 5270 | 17.0 | 17.0 | No |
| | | | 62 | 5310 | 14.5 | 14.5 | |
| | | 1 Tx VHT80 | 58 | 5290 | 13.0 | 13.0 | No |

Note(s):

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11 a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

| Band (GHz) | Mode | No. of Transmitters | Ch # | Freq. (MHz) | Max RF Output Power (dBm) | | SAR Test (Y/Yes/N/No) |
|------------|----------|---------------------|------|-------------|---------------------------|-----------|-----------------------|
| | | | | | Antenna A | Antenna B | |
| 5.5 | 802.11a | 1 Tx | 100 | 5500 | 15.5 | 15.5 | No |
| | | | 104 | 5520 | 16.5 | 17.0 | |
| | | | 108 | 5540 | 16.5 | 17.0 | |
| | | | 112 | 5560 | 16.5 | 17.0 | |
| | | | 116 | 5580 | 16.5 | 17.0 | |
| | | | 120 | 5600 | 16.5 | 17.0 | |
| | | | 124 | 5620 | 16.5 | 17.0 | |
| | | | 128 | 5640 | 16.5 | 17.0 | |
| | | | 132 | 5660 | 16.5 | 17.0 | |
| | | | 136 | 5680 | 16.5 | 17.0 | |
| | | | 140 | 5700 | 15.5 | 15.5 | |
| | | | 144 | 5720 | 16.5 | 17.0 | |
| 5.5 | 802.11n | 1 Tx HT20 | 100 | 5500 | 15.5 | 15.5 | No |
| | | | 104 | 5520 | 16.5 | 17.0 | |
| | | | 108 | 5540 | 16.5 | 17.0 | |
| | | | 112 | 5560 | 16.5 | 17.0 | |
| | | | 116 | 5580 | 16.5 | 17.0 | |
| | | | 120 | 5600 | 16.5 | 17.0 | |
| | | | 124 | 5620 | 16.5 | 17.0 | |
| | | | 128 | 5640 | 16.5 | 17.0 | |
| | | | 132 | 5660 | 16.5 | 17.0 | |
| | | | 136 | 5680 | 16.5 | 17.0 | |
| | | | 140 | 5700 | 15.5 | 15.5 | |
| | | | 144 | 5720 | 16.5 | 17.0 | |
| 5.5 | 802.11ac | 1 Tx VHT20 | 102 | 5510 | 14.0 | 14.0 | No |
| | | | 110 | 5550 | 16.5 | 17.0 | |
| | | | 118 | 5590 | 16.5 | 17.0 | |
| | | | 126 | 5630 | 16.5 | 17.0 | |
| | | | 134 | 5670 | 16.0 | 16.0 | |
| | | | 142 | 5710 | 16.5 | 17.0 | |
| | | | 100 | 5500 | 15.5 | 15.5 | |
| | | | 104 | 5520 | 16.5 | 17.0 | |
| | | | 108 | 5540 | 16.5 | 17.0 | |
| | | | 112 | 5560 | 16.5 | 17.0 | |
| | | | 116 | 5580 | 16.5 | 17.0 | |
| 5.5 | 802.11ac | 1 Tx VHT40 | 120 | 5600 | 16.5 | 17.0 | No |
| | | | 124 | 5620 | 16.5 | 17.0 | |
| | | | 128 | 5640 | 16.5 | 17.0 | |
| | | | 132 | 5660 | 16.5 | 17.0 | |
| | | | 136 | 5680 | 16.5 | 17.0 | |
| | | | 140 | 5700 | 15.5 | 15.5 | |
| | | | 144 | 5720 | 16.5 | 17.0 | |
| | | | 102 | 5510 | 14.0 | 14.0 | |
| | | | 110 | 5550 | 16.5 | 17.0 | |
| | | | 118 | 5590 | 16.5 | 17.0 | |
| | | | 126 | 5630 | 16.5 | 17.0 | |
| 5.5 | 802.11ac | 1 Tx VHT80 | 134 | 5670 | 16.0 | 16.0 | No |
| | | | 142 | 5710 | 16.5 | 17.0 | |
| | | | 106 | 5530 | 14.0 | 14.0 | |
| | | | 122 | 5610 | 16.5 | 17.0 | |
| | | | 138 | 5690 | 16.5 | 17.0 | |

Note(s):

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR test reduction was applied from KDB 248227 guidance, Sec. 2.1, b, 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11 a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

| Band (GHz) | Mode | No. of Transmitters | Ch # | Freq. (MHz) | Max RF Output Power (dBm) | | SAR Test (Yes/No) |
|------------|----------|---------------------|------|-------------|---------------------------|-----------|-------------------|
| | | | | | Antenna A | Antenna B | |
| 5.8 | 802.11a | 1 Tx | 149 | 5745 | 16.5 | 16.5 | No |
| | | | 153 | 5765 | 16.5 | 16.5 | |
| | | | 157 | 5785 | 16.5 | 16.5 | |
| | | | 161 | 5805 | 16.5 | 16.5 | |
| | | | 165 | 5825 | 16.5 | 16.5 | |
| | 802.11n | 1 Tx HT20 | 149 | 5745 | 16.5 | 16.5 | No |
| | | | 153 | 5765 | 16.5 | 16.5 | |
| | | | 157 | 5785 | 16.5 | 16.5 | |
| | | | 161 | 5805 | 16.5 | 16.5 | |
| | | | 165 | 5825 | 16.5 | 16.5 | |
| | 802.11ac | 1 Tx VHT20 | 151 | 5755 | 16.5 | 16.5 | No |
| | | | 159 | 5795 | 16.5 | 16.5 | |
| | | | 149 | 5745 | 16.5 | 16.5 | |
| | | | 153 | 5765 | 16.5 | 16.5 | |
| | | | 157 | 5785 | 16.5 | 16.5 | |
| | | 1 Tx VHT40 | 161 | 5805 | 16.5 | 16.5 | No |
| | | | 165 | 5825 | 16.5 | 16.5 | |
| | | 1 Tx VHT80 | 155 | 5775 | 16.5 | 16.5 | Yes |

Note(s):

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11 a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

6.3.2. WLAN MIMO

| Band (GHz) | Mode | No. of Transmitters | Ch # | Freq. (MHz) | Max RF Output Power (dBm) | | SAR Test (Yes/No) |
|------------|---------|------------------------|------|-------------|---------------------------|-----------|-------------------|
| | | | | | Antenna A | Antenna B | |
| 2.4 | 802.11g | 2 Tx CDD | 1 | 2412 | 13.0 | 13.0 | Yes |
| | | | 2 | 2417 | 16.0 | 15.5 | |
| | | | 3 | 2422 | 16.0 | 15.5 | |
| | | | 6 | 2437 | 16.0 | 15.5 | |
| | | | 9 | 2452 | 16.0 | 15.5 | |
| | | | 10 | 2457 | 16.0 | 15.5 | |
| | | | 11 | 2462 | 12.5 | 12.5 | |
| | | | 12 | 2467 | 10.5 | 10.5 | |
| | | | 13 | 2472 | 1.0 | 1.0 | |
| | 802.11n | 2 Tx HT20 CDD/STBC/SDM | 1 | 2412 | 13.0 | 13.0 | No |
| | | | 2 | 2417 | 16.0 | 15.5 | |
| | | | 3 | 2422 | 16.0 | 15.5 | |
| | | | 6 | 2437 | 16.0 | 15.5 | |
| | | | 9 | 2452 | 16.0 | 15.5 | |
| | | | 10 | 2457 | 16.0 | 15.5 | |
| | | | 11 | 2462 | 12.5 | 12.5 | |
| | | | 12 | 2467 | 10.5 | 10.5 | |
| | | | 13 | 2472 | 1.0 | 1.0 | |

| Band (GHz) | Mode | No. of Transmitters | Ch # | Freq. (MHz) | Max RF Output Power (dBm) | | SAR Test (Yes/No) |
|------------|----------|-------------------------|------|-------------|---------------------------|-----------|-------------------|
| | | | | | Antenna A | Antenna B | |
| 5.2 | 802.11a | 2 Tx CDD | 36 | 5180 | 14.5 | 14.5 | No |
| | | | 40 | 5200 | 16.5 | 16.5 | |
| | | | 44 | 5220 | 16.5 | 16.5 | |
| | | | 48 | 5240 | 16.5 | 16.5 | |
| | 802.11n | 2 Tx HT20 CDD/STBC/SDM | 36 | 5180 | 14.5 | 14.5 | No |
| | | | 40 | 5200 | 16.5 | 16.5 | |
| | | | 44 | 5220 | 16.5 | 16.5 | |
| | | | 48 | 5240 | 16.5 | 16.5 | |
| | 802.11ac | 2 Tx HT40 CDD/STBC/SDM | 38 | 5190 | 13.5 | 13.5 | No |
| | | | 46 | 5230 | 16.5 | 16.5 | |
| | | | 36 | 5180 | 14.5 | 14.5 | No |
| | | | 40 | 5200 | 16.5 | 16.5 | |
| | | | 44 | 5220 | 16.5 | 16.5 | |
| | | 2 Tx VHT40 CDD/STBC/SDM | 48 | 5240 | 16.5 | 16.5 | No |
| | | | 38 | 5190 | 13.5 | 13.5 | |
| | | | 46 | 5230 | 16.5 | 16.5 | |
| | | 2 Tx VHT80 CDD/STBC/SDM | 42 | 5210 | 13.0 | 13.0 | No |

Note(s):

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11 a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

| Band (GHz) | Mode | No. of Transmitters | Ch # | Freq. (MHz) | Max RF Output Power (dBm) | | SAR Test (Yes/No) |
|------------|------------------------|-------------------------|------|-------------|---------------------------|-----------|-------------------|
| | | | | | Antenna A | Antenna B | |
| 5.3 | 802.11a | 2 Tx CDD | 52 | 5260 | 16.5 | 16.5 | No |
| | | | 56 | 5280 | 16.5 | 16.5 | |
| | | | 60 | 5300 | 16.5 | 16.5 | |
| | | | 64 | 5320 | 14.5 | 14.5 | |
| | 802.11n | 2 Tx HT20 CDD | 52 | 5260 | 16.5 | 16.5 | No |
| | | | 56 | 5280 | 16.5 | 16.5 | |
| | | | 60 | 5300 | 16.5 | 16.5 | |
| | | | 64 | 5320 | 14.5 | 14.5 | |
| | 2 Tx HT40 CDD/STBC/SDM | 2 Tx HT20 STBC/SDM | 52 | 5260 | 17.0 | 17.0 | Yes |
| | | | 56 | 5280 | 17.0 | 17.0 | |
| | | 2 Tx HT40 CDD/STBC/SDM | 60 | 5300 | 17.0 | 17.0 | |
| | | | 64 | 5320 | 14.5 | 14.5 | |
| | 802.11ac | 2 Tx VHT20 CDD | 52 | 5260 | 16.5 | 16.5 | No |
| | | | 56 | 5280 | 16.5 | 16.5 | |
| | | | 60 | 5300 | 16.5 | 16.5 | |
| | | | 64 | 5320 | 14.5 | 14.5 | |
| | | 2 Tx VHT20 STBC/SDM | 52 | 5260 | 17.0 | 17.0 | No |
| | | | 56 | 5280 | 17.0 | 17.0 | |
| | | | 60 | 5300 | 17.0 | 17.0 | |
| | | | 64 | 5320 | 14.5 | 14.5 | |
| | | 2 Tx VHT40 CDD/STBC/SDM | 54 | 5270 | 17.0 | 17.0 | No |
| | | | 62 | 5310 | 13.5 | 13.5 | |
| | | 2 Tx VHT80 CDD/STBC/SDM | 58 | 5290 | 12.0 | 12.0 | No |

Note(s):

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11 a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

| Band (GHz) | Mode | No. of Transmitters | Ch # | Freq. (MHz) | Max RF Output Power (dBm) | | SAR Test (Yes/No) |
|------------|---------|---------------------|------|-------------|---------------------------|-----------|-------------------|
| | | | | | Antenna A | Antenna B | |
| 5.5 | 802.11a | 2 Tx CDD | 100 | 5500 | 15.0 | 15.0 | No |
| | | | 104 | 5520 | 15.5 | 15.5 | |
| | | | 108 | 5540 | 15.5 | 15.5 | |
| | | | 112 | 5560 | 15.5 | 15.5 | |
| | | | 116 | 5580 | 15.5 | 15.5 | |
| | | | 120 | 5600 | 15.5 | 15.5 | |
| | | | 124 | 5620 | 15.5 | 15.5 | |
| | | | 128 | 5640 | 15.5 | 15.5 | |
| | | | 132 | 5660 | 15.5 | 15.5 | |
| | | | 136 | 5680 | 15.5 | 15.5 | |
| | | | 140 | 5700 | 14.0 | 14.0 | |
| | | | 144 | 5720 | 15.5 | 15.5 | |
| | | | 100 | 5500 | 15.0 | 15.0 | |
| | | | 104 | 5520 | 15.5 | 15.5 | |
| 5.5 | 802.11n | 2 Tx HT20 CDD | 108 | 5540 | 15.5 | 15.5 | No |
| | | | 112 | 5560 | 15.5 | 15.5 | |
| | | | 116 | 5580 | 15.5 | 15.5 | |
| | | | 120 | 5600 | 15.5 | 15.5 | |
| | | | 124 | 5620 | 15.5 | 15.5 | |
| | | | 128 | 5640 | 15.5 | 15.5 | |
| | | | 132 | 5660 | 15.5 | 15.5 | |
| | | | 136 | 5680 | 15.5 | 15.5 | |
| | | | 140 | 5700 | 14.0 | 14.0 | |
| | | | 144 | 5720 | 15.5 | 15.5 | |
| | | | 100 | 5500 | 15.0 | 15.0 | No |
| | | | 104 | 5520 | 16.5 | 17.0 | |
| | | | 108 | 5540 | 16.5 | 17.0 | |
| | | | 112 | 5560 | 16.5 | 17.0 | |
| | | | 116 | 5580 | 16.5 | 17.0 | |
| | | | 120 | 5600 | 16.5 | 17.0 | |
| | | | 124 | 5620 | 16.5 | 17.0 | |
| | | | 128 | 5640 | 16.5 | 17.0 | |
| | | | 132 | 5660 | 16.5 | 17.0 | |
| | | | 136 | 5680 | 16.5 | 17.0 | |
| | | | 140 | 5700 | 14.0 | 14.0 | |
| | | | 144 | 5720 | 16.5 | 17.0 | |
| | | | 102 | 5510 | 13.0 | 13.0 | No |
| | | | 110 | 5550 | 16.5 | 17.0 | |
| | | | 118 | 5590 | 16.5 | 17.0 | |
| | | | 126 | 5630 | 16.5 | 17.0 | |
| | | | 134 | 5670 | 15.0 | 15.0 | |
| | | | 142 | 5710 | 16.5 | 17.0 | |

Note(s):

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11 a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

| Band (GHz) | Mode | No. of Transmitters | Ch # | Freq. (MHz) | Max RF Output Power (dBm) | | SAR Test (Yes/No) |
|------------|----------|--------------------------|------|-------------|---------------------------|-----------|-------------------|
| | | | | | Antenna A | Antenna B | |
| 5.5 | 802.11ac | 2 Tx VHT20 CDD | 100 | 5500 | 15.0 | 15.0 | No |
| | | | 104 | 5520 | 15.5 | 15.5 | |
| | | | 108 | 5540 | 15.5 | 15.5 | |
| | | | 112 | 5560 | 15.5 | 15.5 | |
| | | | 116 | 5580 | 15.5 | 15.5 | |
| | | | 120 | 5600 | 15.5 | 15.5 | |
| | | | 124 | 5620 | 15.5 | 15.5 | |
| | | | 128 | 5640 | 15.5 | 15.5 | |
| | | | 132 | 5660 | 15.5 | 15.5 | |
| | | | 136 | 5680 | 15.5 | 15.5 | |
| | | 2 Tx VHT20 STBC/ SDM | 140 | 5700 | 14.0 | 14.0 | No |
| | | | 144 | 5720 | 15.5 | 15.5 | |
| | | | 100 | 5500 | 15.0 | 15.0 | |
| | | | 104 | 5520 | 16.5 | 17.0 | |
| | | 2 Tx VHT40 CDD/STBC/ SDM | 108 | 5540 | 16.5 | 17.0 | No |
| | | | 112 | 5560 | 16.5 | 17.0 | |
| | | | 116 | 5580 | 16.5 | 17.0 | |
| | | | 120 | 5600 | 16.5 | 17.0 | |
| | | | 124 | 5620 | 16.5 | 17.0 | |
| | | | 128 | 5640 | 16.5 | 17.0 | |
| | | 2 Tx VHT80 CDD/STBC/ SDM | 132 | 5660 | 16.5 | 17.0 | Yes |
| | | | 136 | 5680 | 16.5 | 17.0 | |
| | | | 140 | 5700 | 14.0 | 14.0 | |
| | | | 144 | 5720 | 16.5 | 17.0 | |
| | | | 102 | 5510 | 13.0 | 13.0 | No |
| | | | 110 | 5550 | 16.5 | 17.0 | |
| | | | 118 | 5590 | 16.5 | 17.0 | |
| | | | 126 | 5630 | 16.5 | 17.0 | Yes |
| | | | 134 | 5670 | 15.0 | 15.0 | |
| | | | 142 | 5710 | 16.5 | 17.0 | |
| | | | 106 | 5530 | 13.0 | 13.0 | Yes |
| | | | 122 | 5610 | 16.5 | 17.0 | |
| | | | 138 | 5690 | 16.5 | 17.0 | |

Note(s):

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11 a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

| Band (GHz) | Mode | No. of Transmitters | Ch # | Freq. (MHz) | Max RF Output Power (dBm) | | SAR Test (Yes/No) |
|------------|----------|-------------------------|------|-------------|---------------------------|-----------|-------------------|
| | | | | | Antenna A | Antenna B | |
| 5.8 | 802.11a | 2 Tx CDD | 149 | 5745 | 16.5 | 16.5 | No |
| | | | 153 | 5765 | 16.5 | 16.5 | |
| | | | 157 | 5785 | 16.5 | 16.5 | |
| | | | 161 | 5805 | 16.5 | 16.5 | |
| | | | 165 | 5825 | 16.5 | 16.5 | |
| | 802.11n | 2 Tx HT20 CDD/STBC/SDM | 149 | 5745 | 16.5 | 16.5 | No |
| | | | 153 | 5765 | 16.5 | 16.5 | |
| | | | 157 | 5785 | 16.5 | 16.5 | |
| | | | 161 | 5805 | 16.5 | 16.5 | |
| | | | 165 | 5825 | 16.5 | 16.5 | |
| | 802.11ac | 2 Tx HT40 CDD/STBC/SDM | 151 | 5755 | 16.5 | 16.5 | Yes |
| | | | 159 | 5795 | 16.5 | 16.5 | |
| | | | 149 | 5745 | 16.5 | 16.5 | No |
| | | | 153 | 5765 | 16.5 | 16.5 | |
| | | | 157 | 5785 | 16.5 | 16.5 | |
| | | 2 Tx VHT40 CDD/STBC/SDM | 161 | 5805 | 16.5 | 16.5 | No |
| | | | 165 | 5825 | 16.5 | 16.5 | |
| | | 2 Tx VHT80 CDD/STBC/SDM | 151 | 5755 | 16.5 | 16.5 | No |
| | | 2 Tx VHT80 CDD/STBC/SDM | 159 | 5795 | 16.5 | 16.5 | |
| | | 2 Tx VHT80 CDD/STBC/SDM | 155 | 5775 | 15.0 | 15.0 | No |

Note(s):

1. "Yes" = considered for output power measurement and SAR testing. "No" = SAR test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11 a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

6.3.3. Bluetooth

| RF Air Interface | Mode | Max RF Output Power (dBm) | |
|------------------|------|---------------------------|------------------|
| | | Antenna A | |
| | | P _{High} | P _{Low} |
| Bluetooth | GFSK | 17.0 | 10.0 |

Note(s):

Bluetooth P_{low} is triggered when 5 GHz Wi-Fi is on. Functional description of this mode is provided in technical description documents.

7. RF Exposure Conditions (Test Configurations)

WLAN antennas are located near the lower left and right corners of the device.

Refer to separate filing submission document for the proprietary design details of the antenna-to-antenna and antenna-to-edge distances.

7.1. Standalone SAR Test Exclusion Considerations

Since the *Dedicated Host Approach* is applied, the standalone SAR test exclusion procedure in KDB 447498 § 4.3.1 is applied in conjunction with KDB 616217 § 4.3 to determine the minimum test separation distance:

- When the separation distance from the antenna to an adjacent edge is ≤ 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.
- When the separation distance from the antenna to an adjacent edge is > 5 mm, the actual antenna-to-edge separation distance is applied to determine SAR test exclusion.

SAR Test Exclusion Calculations for WLAN

Antennas < 50 mm to adjacent edges

| Tx Interface | Frequency (MHz) | Output Power | | Separation Distances (mm) | | | | | | Calculated Threshold Value | | | | | |
|------------------|-----------------|--------------|----|---------------------------|--------|--------|--------|--------|-------|----------------------------|---------|------------------|-------------------|-------------------|-------|
| | | dBm | mW | Rear | Edge 1 | Edge 2 | Edge 3 | Edge 4 | Front | Rear | Edge 1 | Edge 2 | Edge 3 | Edge 4 | Front |
| Antenna A | | | | | | | | | | | | | | | |
| Wi-Fi 2.4 GHz | 2462 | 16.00 | 40 | 6.56 | 227.53 | 128.27 | 3.4 | 10.96 | | 9 -MEASURE- | > 50 mm | > 50 mm | 12.6 -MEASURE- | 5.7 -MEASURE- | |
| Wi-Fi 5.2 GHz | 5240 | 16.50 | 45 | 6.56 | 227.53 | 128.27 | 3.4 | 10.96 | | 14.7 -MEASURE- | > 50 mm | > 50 mm | 20.6 -MEASURE- | 9.4 -MEASURE- | |
| Wi-Fi 5.3 GHz | 5320 | 17.00 | 50 | 6.56 | 227.53 | 128.27 | 3.4 | 10.96 | | 16.5 -MEASURE- | > 50 mm | > 50 mm | 23.1 -MEASURE- | 10.5 -MEASURE- | |
| Wi-Fi 5.5 GHz | 5700 | 16.50 | 45 | 6.56 | 227.53 | 128.27 | 3.4 | 10.96 | | 15.3 -MEASURE- | > 50 mm | > 50 mm | 21.5 -MEASURE- | 9.8 -MEASURE- | |
| Wi-Fi 5.8 GHz | 5825 | 16.50 | 45 | 6.56 | 227.53 | 128.27 | 3.4 | 10.96 | | 15.5 -MEASURE- | > 50 mm | > 50 mm | 21.7 -MEASURE- | 9.9 -MEASURE- | |
| Bluetooth | 2480 | 17.00 | 50 | 6.56 | 227.53 | 128.27 | 3.4 | 10.96 | | 11.2 -MEASURE- | > 50 mm | > 50 mm | 15.7 -MEASURE- | 7.2 -MEASURE- | |
| Antenna B | | | | | | | | | | | | | | | |
| Wi-Fi 2.4 GHz | 2462 | 15.50 | 35 | 6.56 | 227.53 | 12.04 | 3.4 | 128.27 | | 7.8 -MEASURE- | > 50 mm | 4.6 -MEASURE- | 11 -MEASURE- | > 50 mm | |
| Wi-Fi 5.2 GHz | 5240 | 16.50 | 45 | 6.56 | 227.53 | 12.04 | 3.4 | 128.27 | | 14.7 -MEASURE- | > 50 mm | 8.6 -MEASURE- | 20.6 -MEASURE- | > 50 mm | |
| Wi-Fi 5.3 GHz | 5320 | 17.00 | 50 | 6.56 | 227.53 | 12.04 | 3.4 | 128.27 | | 16.5 -MEASURE- | > 50 mm | 9.6 -MEASURE- | 23.1 -MEASURE- | > 50 mm | |
| Wi-Fi 5.5 GHz | 5700 | 17.00 | 50 | 6.56 | 227.53 | 12.04 | 3.4 | 128.27 | | 17.1 -MEASURE- | > 50 mm | 9.9 -MEASURE- | 23.9 -MEASURE- | > 50 mm | |
| Wi-Fi 5.8 GHz | 5825 | 16.50 | 45 | 6.56 | 227.53 | 12.04 | 3.4 | 128.27 | | 15.5 -MEASURE- | > 50 mm | 9.1 -MEASURE- | 21.7 -MEASURE- | > 50 mm | |

Note(s):

- According to KDB 447498, if the calculated Power threshold is less than the output power then SAR testing is required.
- With power levels similar to SISO on each chain, MIMO test requirement was determined by the combined requirements of Antenna A and Antenna B SISO.

Antennas > 50 mm to adjacent edges

| Tx Interface | Frequency (MHz) | Output Power | | Separation Distances (mm) | | | | | | Calculated Threshold Value | | | | | |
|------------------|-----------------|--------------|----|---------------------------|--------|--------|--------|--------|-------|----------------------------|-----------------------|----------------------|---------------------|----------------------|-------|
| | | dBm | mW | Rear | Edge 1 | Edge 2 | Edge 3 | Edge 4 | Front | Rear | Edge 1 | Edge 2 | Edge 3 | Edge 4 | Front |
| Antenna A | | | | | | | | | | | | | | | |
| Wi-Fi 2.4 GHz | 2462 | 16.00 | 40 | 6.56 | 227.53 | 128.27 | 3.4 | 10.96 | | < 50 mm -EXEMPT- | 1870.9 mW -EXEMPT- | 878.3 mW -EXEMPT- | < 50 mm -EXEMPT- | < 50 mm -EXEMPT- | |
| Wi-Fi 5.2 GHz | 5240 | 16.50 | 45 | 6.56 | 227.53 | 128.27 | 3.4 | 10.96 | | < 50 mm -EXEMPT- | 1840.8 mW -EXEMPT- | 848.2 mW -EXEMPT- | < 50 mm -EXEMPT- | < 50 mm -EXEMPT- | |
| Wi-Fi 5.3 GHz | 5320 | 17.00 | 50 | 6.56 | 227.53 | 128.27 | 3.4 | 10.96 | | < 50 mm -EXEMPT- | 1840.3 mW -EXEMPT- | 847.7 mW -EXEMPT- | < 50 mm -EXEMPT- | < 50 mm -EXEMPT- | |
| Wi-Fi 5.5 GHz | 5700 | 16.50 | 45 | 6.56 | 227.53 | 128.27 | 3.4 | 10.96 | | < 50 mm -EXEMPT- | 1838.1 mW -EXEMPT- | 845.5 mW -EXEMPT- | < 50 mm -EXEMPT- | < 50 mm -EXEMPT- | |
| Wi-Fi 5.8 GHz | 5825 | 16.50 | 45 | 6.56 | 227.53 | 128.27 | 3.4 | 10.96 | | < 50 mm -EXEMPT- | 1837.5 mW -EXEMPT- | 844.9 mW -EXEMPT- | < 50 mm -EXEMPT- | < 50 mm -EXEMPT- | |
| Antenna B | | | | | | | | | | | | | | | |
| Wi-Fi 2.4 GHz | 2462 | 15.50 | 35 | 6.56 | 227.53 | 12.04 | 3.4 | 128.27 | | < 50 mm -EXEMPT- | 1870.9 mW -EXEMPT- | < 50 mm -EXEMPT- | < 50 mm -EXEMPT- | 878.3 mW -EXEMPT- | |
| Wi-Fi 5.2 GHz | 5240 | 16.50 | 45 | 6.56 | 227.53 | 12.04 | 3.4 | 128.27 | | < 50 mm -EXEMPT- | 1840.8 mW -EXEMPT- | < 50 mm -EXEMPT- | < 50 mm -EXEMPT- | 848.2 mW -EXEMPT- | |
| Wi-Fi 5.3 GHz | 5320 | 17.00 | 50 | 6.56 | 227.53 | 12.04 | 3.4 | 128.27 | | < 50 mm -EXEMPT- | 1840.3 mW -EXEMPT- | < 50 mm -EXEMPT- | < 50 mm -EXEMPT- | 847.7 mW -EXEMPT- | |
| Wi-Fi 5.5 GHz | 5700 | 17.00 | 50 | 6.56 | 227.53 | 12.04 | 3.4 | 128.27 | | < 50 mm -EXEMPT- | 1838.1 mW -EXEMPT- | < 50 mm -EXEMPT- | < 50 mm -EXEMPT- | 845.5 mW -EXEMPT- | |
| Wi-Fi 5.8 GHz | 5825 | 16.50 | 45 | 6.56 | 227.53 | 12.04 | 3.4 | 128.27 | | < 50 mm -EXEMPT- | 1837.5 mW -EXEMPT- | < 50 mm -EXEMPT- | < 50 mm -EXEMPT- | 844.9 mW -EXEMPT- | |

Note(s):

- According to KDB 447498, if the calculated Power threshold is less than the output power then SAR testing is required.
- With power levels similar to SISO on each chain, MIMO test requirement was determined by the combined requirements of Antenna A and Antenna B SISO.

7.2. Required Test Configurations

The table below identifies the standalone test configurations required for this device according to the findings in Section 7.1:

| Test Configurations | Rear | Edge 1 | Edge 2 | Edge 3 | Edge 4 |
|--------------------------------|------|------------|--------------|---------------|-------------|
| | | (Top Edge) | (Right Edge) | (Bottom Edge) | (Left Edge) |
| Wi-Fi 2.4 GHz SISO (Antenna A) | Yes | No | No | Yes | Yes |
| Wi-Fi 2.4 GHz SISO (Antenna B) | Yes | No | Yes | Yes | No |
| Wi-Fi 2.4 GHz MIMO | Yes | No | Yes | Yes | Yes |
| Wi-Fi 5 GHz SISO (Antenna A) | Yes | No | No | Yes | Yes |
| Wi-Fi 5 GHz SISO (Antenna B) | Yes | No | Yes | Yes | No |
| Wi-Fi 5 GHz MIMO | Yes | No | Yes | Yes | Yes |
| Bluetooth | Yes | No | No | Yes | Yes |

Note(s):

Yes = Testing is required.

No = Testing is not required.

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

The dielectric constant (ϵ_r) and conductivity (σ) of typical tissue-equivalent media recipes are expected to be within $\pm 5\%$ of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$. This is limited to frequencies $\leq 3\text{ GHz}$.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

| Target Frequency (MHz) | Head | | Body | |
|------------------------|--------------|----------------|--------------|----------------|
| | ϵ_r | σ (S/m) | ϵ_r | σ (S/m) |
| 150 | 52.3 | 0.76 | 61.9 | 0.80 |
| 300 | 45.3 | 0.87 | 58.2 | 0.92 |
| 450 | 43.5 | 0.87 | 56.7 | 0.94 |
| 835 | 41.5 | 0.90 | 55.2 | 0.97 |
| 900 | 41.5 | 0.97 | 55.0 | 1.05 |
| 915 | 41.5 | 0.98 | 55.0 | 1.06 |
| 1450 | 40.5 | 1.20 | 54.0 | 1.30 |
| 1610 | 40.3 | 1.29 | 53.8 | 1.40 |
| 1800 – 2000 | 40.0 | 1.40 | 53.3 | 1.52 |
| 2450 | 39.2 | 1.80 | 52.7 | 1.95 |
| 3000 | 38.5 | 2.40 | 52.0 | 2.73 |
| 5000 | 36.2 | 4.45 | 49.3 | 5.07 |
| 5100 | 36.1 | 4.55 | 49.1 | 5.18 |
| 5200 | 36.0 | 4.66 | 49.0 | 5.30 |
| 5300 | 35.9 | 4.76 | 48.9 | 5.42 |
| 5400 | 35.8 | 4.86 | 48.7 | 5.53 |
| 5500 | 35.6 | 4.96 | 48.6 | 5.65 |
| 5600 | 35.5 | 5.07 | 48.5 | 5.77 |
| 5700 | 35.4 | 5.17 | 48.3 | 5.88 |
| 5800 | 35.3 | 5.27 | 48.2 | 6.00 |

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:

| SAR Lab | Date | Tissue Type | Band (MHz) | Frequency (MHz) | Relative Permittivity (ϵ_r) | | | Conductivity (σ) | | |
|---------|------------|-------------|------------|-----------------|--|--------|-----------|---------------------------|--------|-----------|
| | | | | | Measured | Target | Delta (%) | Measured | Target | Delta (%) |
| A | 12/5/2016 | 5200 | Body | 5200 | 46.77 | 49.02 | -4.59 | 5.50 | 5.29 | 3.93 |
| | | | | 5150 | 46.84 | 49.09 | -4.58 | 5.44 | 5.24 | 3.89 |
| | | | | 5350 | 46.50 | 48.82 | -4.75 | 5.70 | 5.47 | 4.21 |
| A | 12/5/2016 | 5600 | Body | 5600 | 46.33 | 48.48 | -4.43 | 5.78 | 5.76 | 0.31 |
| | | | | 5500 | 46.48 | 48.61 | -4.39 | 5.66 | 5.64 | 0.20 |
| | | | | 5725 | 46.14 | 48.31 | -4.49 | 5.94 | 5.91 | 0.63 |
| A | 12/8/2016 | 5200 | Body | 5200 | 49.15 | 49.02 | 0.27 | 5.30 | 5.29 | 0.01 |
| | | | | 5150 | 49.18 | 49.09 | 0.19 | 5.22 | 5.24 | -0.41 |
| | | | | 5350 | 48.86 | 48.82 | 0.09 | 5.49 | 5.47 | 0.30 |
| A | 12/8/2016 | 5600 | Body | 5600 | 48.59 | 48.48 | 0.23 | 5.84 | 5.76 | 1.28 |
| | | | | 5500 | 48.63 | 48.61 | 0.03 | 5.69 | 5.64 | 0.86 |
| | | | | 5725 | 48.32 | 48.31 | 0.02 | 6.02 | 5.91 | 1.93 |
| A | 12/12/2016 | 5200 | Body | 5200 | 47.58 | 49.02 | -2.94 | 5.54 | 5.29 | 4.60 |
| | | | | 5150 | 47.67 | 49.09 | -2.89 | 5.45 | 5.24 | 4.16 |
| | | | | 5350 | 47.35 | 48.82 | -3.00 | 5.72 | 5.47 | 4.56 |
| A | 12/12/2016 | 5600 | Body | 5600 | 46.52 | 48.48 | -4.04 | 6.01 | 5.76 | 4.32 |
| | | | | 5500 | 46.76 | 48.61 | -3.81 | 5.89 | 5.64 | 4.40 |
| | | | | 5725 | 46.25 | 48.31 | -4.26 | 6.17 | 5.91 | 4.52 |
| A | 12/12/2016 | 5800 | Body | 5800 | 46.38 | 48.20 | -3.78 | 6.18 | 6.00 | 2.98 |
| | | | | 5700 | 46.57 | 48.34 | -3.67 | 6.07 | 5.88 | 3.21 |
| | | | | 5850 | 46.21 | 48.20 | -4.13 | 6.25 | 6.00 | 4.20 |
| B | 12/7/2016 | 2450 | Body | 2450 | 51.34 | 52.70 | -2.58 | 2.03 | 1.95 | 4.00 |
| | | | | 2400 | 51.44 | 52.77 | -2.53 | 1.97 | 1.90 | 3.90 |
| | | | | 2480 | 51.26 | 52.66 | -2.66 | 2.06 | 1.99 | 3.36 |
| B | 12/12/2016 | 2450 | Body | 2450 | 52.72 | 52.70 | 0.04 | 2.03 | 1.95 | 4.05 |
| | | | | 2400 | 52.85 | 52.77 | 0.15 | 1.97 | 1.90 | 3.95 |
| | | | | 2480 | 52.62 | 52.66 | -0.08 | 2.07 | 1.99 | 3.66 |
| B | 12/15/2016 | 2450 | Body | 2450 | 50.79 | 52.70 | -3.62 | 2.01 | 1.95 | 3.08 |
| | | | | 2400 | 50.95 | 52.77 | -3.45 | 1.96 | 1.90 | 3.05 |
| | | | | 2480 | 50.69 | 52.66 | -3.74 | 2.04 | 1.99 | 2.50 |
| C | 12/5/2016 | 5600 | Body | 5600 | 47.79 | 48.48 | -1.42 | 5.75 | 5.76 | -0.19 |
| | | | | 5500 | 47.91 | 48.61 | -1.45 | 5.63 | 5.64 | -0.22 |
| | | | | 5725 | 47.62 | 48.31 | -1.42 | 5.93 | 5.91 | 0.33 |
| C | 12/5/2016 | 5800 | Body | 5800 | 47.54 | 48.20 | -1.37 | 6.04 | 6.00 | 0.62 |
| | | | | 5700 | 47.66 | 48.34 | -1.41 | 5.90 | 5.88 | 0.43 |
| | | | | 5850 | 47.36 | 48.20 | -1.74 | 6.09 | 6.00 | 1.57 |
| C | 12/8/2016 | 5600 | Body | 5600 | 48.43 | 48.48 | -0.10 | 5.93 | 5.76 | 2.95 |
| | | | | 5500 | 48.58 | 48.61 | -0.07 | 5.82 | 5.64 | 3.04 |
| | | | | 5725 | 48.20 | 48.31 | -0.22 | 6.11 | 5.91 | 3.44 |
| C | 12/8/2016 | 5800 | Body | 5800 | 48.22 | 48.20 | 0.04 | 6.22 | 6.00 | 3.72 |
| | | | | 5700 | 48.34 | 48.34 | 0.00 | 6.10 | 5.88 | 3.77 |
| | | | | 5850 | 47.91 | 48.20 | -0.60 | 6.30 | 6.00 | 4.97 |

| SAR Lab | Date | Tissue Type | Band (MHz) | Frequency (MHz) | Relative Permittivity (ϵ_r) | | | Conductivity (σ) | | |
|---------|------------|-------------|------------|-----------------|--|--------|-----------|---------------------------|--------|-----------|
| | | | | | Measured | Target | Delta (%) | Measured | Target | Delta (%) |
| D | 12/5/2016 | 2450 | Body | 2450 | 51.51 | 52.70 | -2.26 | 1.96 | 1.95 | 0.46 |
| | | | | 2400 | 51.68 | 52.77 | -2.07 | 1.90 | 1.90 | -0.05 |
| | | | | 2480 | 51.38 | 52.66 | -2.43 | 2.00 | 1.99 | 0.29 |
| D | 12/8/2016 | 2450 | Body | 2450 | 50.77 | 52.70 | -3.66 | 1.93 | 1.95 | -1.03 |
| | | | | 2400 | 50.92 | 52.77 | -3.51 | 1.86 | 1.90 | -1.95 |
| | | | | 2480 | 50.62 | 52.66 | -3.88 | 1.96 | 1.99 | -1.51 |
| D | 12/8/2016 | 5200 | Body | 5200 | 48.79 | 49.02 | -0.47 | 5.34 | 5.29 | 0.82 |
| | | | | 5150 | 48.76 | 49.09 | -0.67 | 5.27 | 5.24 | 0.68 |
| | | | | 5350 | 48.55 | 48.82 | -0.55 | 5.52 | 5.47 | 1.00 |
| D | 12/8/2016 | 5800 | Body | 5800 | 48.05 | 48.20 | -0.31 | 6.12 | 6.00 | 1.98 |
| | | | | 5700 | 48.16 | 48.34 | -0.38 | 5.99 | 5.88 | 1.98 |
| | | | | 5850 | 47.69 | 48.20 | -1.06 | 6.18 | 6.00 | 3.02 |
| D | 12/12/2016 | 5800 | Body | 5800 | 47.64 | 48.20 | -1.16 | 6.11 | 6.00 | 1.78 |
| | | | | 5700 | 47.78 | 48.34 | -1.16 | 5.99 | 5.88 | 1.84 |
| | | | | 5850 | 47.54 | 48.20 | -1.37 | 6.12 | 6.00 | 1.95 |
| D | 12/13/2016 | 2450 | Body | 2450 | 50.63 | 52.70 | -3.93 | 2.04 | 1.95 | 4.82 |
| | | | | 2400 | 50.83 | 52.77 | -3.68 | 1.98 | 1.90 | 4.42 |
| | | | | 2480 | 50.52 | 52.66 | -4.07 | 2.09 | 1.99 | 4.66 |
| E | 12/7/2016 | 2450 | Body | 2450 | 52.41 | 52.70 | -0.55 | 2.04 | 1.95 | 4.77 |
| | | | | 2400 | 52.55 | 52.77 | -0.42 | 1.97 | 1.90 | 3.84 |
| | | | | 2480 | 52.31 | 52.66 | -0.67 | 2.07 | 1.99 | 4.11 |
| F | 12/5/2016 | 5200 | Body | 5200 | 47.03 | 49.02 | -4.06 | 5.53 | 5.29 | 4.48 |
| | | | | 5150 | 47.09 | 49.09 | -4.07 | 5.47 | 5.24 | 4.37 |
| | | | | 5350 | 46.75 | 48.82 | -4.23 | 5.73 | 5.47 | 4.78 |
| F | 12/8/2016 | 5200 | Body | 5200 | 48.13 | 49.02 | -1.81 | 5.53 | 5.29 | 4.44 |
| | | | | 5150 | 48.20 | 49.09 | -1.81 | 5.45 | 5.24 | 4.10 |
| | | | | 5350 | 47.82 | 48.82 | -2.04 | 5.72 | 5.47 | 4.56 |
| F | 12/12/2016 | 5200 | Body | 5200 | 46.87 | 49.02 | -4.39 | 5.47 | 5.29 | 3.35 |
| | | | | 5150 | 46.95 | 49.09 | -4.35 | 5.40 | 5.24 | 3.09 |
| | | | | 5350 | 46.62 | 48.82 | -4.50 | 5.65 | 5.47 | 3.35 |

| SAR Lab | Date | Tissue Type | Band (MHz) | Frequency (MHz) | Relative Permittivity (ϵ_r) | | | Conductivity (σ) | | |
|---------|------------|-------------|------------|-----------------|--|--------|-----------|---------------------------|--------|-----------|
| | | | | | Measured | Target | Delta (%) | Measured | Target | Delta (%) |
| G | 12/7/2016 | 2450 | Body | 2450 | 52.60 | 52.70 | -0.19 | 1.96 | 1.95 | 0.36 |
| | | | | 2400 | 52.74 | 52.77 | -0.06 | 1.89 | 1.90 | -0.58 |
| | | | | 2480 | 52.51 | 52.66 | -0.29 | 1.99 | 1.99 | -0.21 |
| G | 12/8/2016 | 5600 | Body | 5600 | 46.70 | 48.48 | -3.67 | 6.01 | 5.76 | 4.32 |
| | | | | 5500 | 46.84 | 48.61 | -3.65 | 5.90 | 5.64 | 4.55 |
| | | | | 5725 | 46.49 | 48.31 | -3.76 | 6.19 | 5.91 | 4.76 |
| G | 12/8/2016 | 5800 | Body | 5800 | 46.38 | 48.20 | -3.78 | 6.23 | 6.00 | 3.87 |
| | | | | 5700 | 46.49 | 48.34 | -3.83 | 6.11 | 5.88 | 3.92 |
| | | | | 5850 | 46.14 | 48.20 | -4.27 | 6.29 | 6.00 | 4.87 |
| G | 12/12/2016 | 5600 | Body | 5600 | 47.80 | 48.48 | -1.40 | 6.03 | 5.76 | 4.67 |
| | | | | 5500 | 47.95 | 48.61 | -1.36 | 5.91 | 5.64 | 4.65 |
| | | | | 5725 | 47.59 | 48.31 | -1.49 | 6.20 | 5.91 | 4.90 |
| H | 12/8/2016 | 5200 | Body | 5200 | 48.25 | 49.02 | -1.57 | 5.42 | 5.29 | 2.35 |
| | | | | 5150 | 48.26 | 49.09 | -1.69 | 5.36 | 5.24 | 2.36 |
| | | | | 5350 | 47.98 | 48.82 | -1.71 | 5.60 | 5.47 | 2.42 |
| H | 12/8/2016 | 5800 | Body | 5800 | 47.43 | 48.20 | -1.60 | 6.18 | 6.00 | 3.05 |
| | | | | 5700 | 47.54 | 48.34 | -1.66 | 6.06 | 5.88 | 3.17 |
| | | | | 5850 | 47.10 | 48.20 | -2.28 | 6.24 | 6.00 | 4.00 |
| H | 12/12/2016 | 5200 | Body | 5200 | 48.49 | 49.02 | -1.08 | 5.52 | 5.29 | 4.26 |
| | | | | 5150 | 48.54 | 49.09 | -1.12 | 5.45 | 5.24 | 4.08 |
| | | | | 5350 | 48.26 | 48.82 | -1.14 | 5.70 | 5.47 | 4.12 |
| H | 12/13/2016 | 5600 | Body | 5600 | 48.52 | 48.48 | 0.09 | 5.50 | 5.76 | -4.60 |
| | | | | 5500 | 48.69 | 48.61 | 0.16 | 5.38 | 5.64 | -4.67 |
| | | | | 5725 | 48.41 | 48.31 | 0.21 | 5.65 | 5.91 | -4.30 |
| H | 12/13/2016 | 5800 | Body | 5800 | 48.33 | 48.20 | 0.27 | 5.76 | 6.00 | -4.07 |
| | | | | 5700 | 48.50 | 48.34 | 0.33 | 5.63 | 5.88 | -4.25 |
| | | | | 5850 | 48.23 | 48.20 | 0.06 | 5.81 | 6.00 | -3.15 |

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ± 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

| SAR Lab | Date | Tissue Type | Dipole Type _Serial # | Dipole Cal. Due Data | Measured Results for 1g SAR | | | | Measured Results for 10g SAR | | | | Plot No. |
|---------|------------|-------------|---------------------------|-------------------------|-----------------------------|------------------|---------------------|-------------|------------------------------|------------------|---------------------|-------------|----------|
| | | | | | Zoom Scan to 100 mW | Normalize to 1 W | Target (Ref. Value) | Delta ±10 % | Zoom Scan to 100 mW | Normalize to 1 W | Target (Ref. Value) | Delta ±10 % | |
| A | 12/5/2016 | Body | D5GHzV2 SN:1003 (5.2 GHz) | 2/25/2017 | 8.010 | 80.10 | 73.30 | 9.28 | 2.240 | 22.40 | 20.60 | 8.74 | 1,2 |
| A | 12/5/2016 | Body | D5GHzV2 SN:1003 (5.6 GHz) | 2/25/2017 | 7.930 | 79.30 | 79.80 | -0.63 | 2.200 | 22.00 | 22.40 | -1.79 | |
| A | 12/8/2016 | Body | D5GHzV2 SN:1003 (5.2 GHz) | 2/25/2017 | 7.580 | 75.80 | 73.30 | 3.41 | 2.130 | 21.30 | 20.60 | 3.40 | |
| A | 12/8/2016 | Body | D5GHzV2 SN:1003 (5.6 GHz) | 2/25/2017 | 7.970 | 79.70 | 79.80 | -0.13 | 2.200 | 22.00 | 22.40 | -1.79 | |
| A | 12/12/2016 | Body | D5GHzV2 SN:1003 (5.2 GHz) | 2/25/2017 | 7.820 | 78.20 | 73.30 | 6.68 | 2.190 | 21.90 | 20.60 | 6.31 | |
| A | 12/12/2016 | Body | D5GHzV2 SN:1003 (5.6 GHz) | 2/25/2017 | 8.510 | 85.10 | 79.80 | 6.64 | 2.360 | 23.60 | 22.40 | 5.36 | |
| A | 12/12/2016 | Body | D5GHzV2 SN:1003 (5.8 GHz) | 2/25/2017 | 7.570 | 75.70 | 75.50 | 0.26 | 2.090 | 20.90 | 21.00 | -0.48 | |
| B | 12/7/2016 | Body | D2450V2 SN:706 | 5/10/2017 | 5.430 | 54.30 | 49.50 | 9.70 | 2.490 | 24.90 | 23.30 | 6.87 | 3,4 |
| B | 12/12/2016 | Body | D2450V2 SN:706 | 5/10/2017 | 5.400 | 54.00 | 49.50 | 9.09 | 2.490 | 24.90 | 23.30 | 6.87 | |
| B | 12/15/2016 | Body | D2450V2 SN:706 | 5/10/2017 | 5.340 | 53.40 | 49.50 | 7.88 | 2.450 | 24.50 | 23.30 | 5.15 | |
| C | 12/5/2016 | Body | D5GHzV2 SN:1003 (5.6 GHz) | 2/25/2017 | 8.390 | 83.90 | 79.80 | 5.14 | 2.300 | 23.00 | 22.40 | 2.68 | 5,6 |
| C | 12/5/2016 | Body | D5GHzV2 SN:1003 (5.8 GHz) | 2/25/2017 | 7.460 | 74.60 | 75.50 | -1.19 | 2.070 | 20.70 | 21.00 | -1.43 | |
| C | 12/8/2016 | Body | D5GHzV2 SN:1138 (5.6 GHz) | 9/22/2017 | 7.940 | 79.40 | 78.80 | 0.76 | 2.190 | 21.90 | 22.00 | -0.45 | |
| C | 12/8/2016 | Body | D5GHzV2 SN:1138 (5.8 GHz) | 9/22/2017 | 7.340 | 73.40 | 75.70 | -3.04 | 2.030 | 20.30 | 21.10 | -3.79 | 7,8 |
| D | 12/5/2016 | Body | D2450V2 SN:899 | 3/15/2017 | 4.950 | 49.50 | 49.60 | -0.20 | 2.250 | 22.50 | 23.40 | -3.85 | |
| D | 12/8/2016 | Body | D2450V2 SN:899 | 3/15/2017 | 5.210 | 52.10 | 49.60 | 5.04 | 2.390 | 23.90 | 23.40 | 2.14 | 9,10 |
| D | 12/8/2016 | Body | D5GHzV2 SN:1138 (5.2 GHz) | 9/22/2017 | 7.780 | 77.80 | 74.20 | 4.85 | 2.190 | 21.90 | 20.90 | 4.78 | |
| D | 12/8/2016 | Body | D5GHzV2 SN:1138 (5.8 GHz) | 9/22/2017 | 7.500 | 75.00 | 75.70 | -0.92 | 2.090 | 20.90 | 21.10 | -0.95 | |
| D | 12/12/2016 | Body | D5GHzV2 SN:1138 (5.8 GHz) | 9/22/2017 | 7.160 | 71.60 | 75.70 | -5.42 | 1.990 | 19.90 | 21.10 | -5.69 | 11,12 |
| D | 12/13/2016 | Body | D2450V2 SN:899 | 3/15/2017 | 4.860 | 48.60 | 49.60 | -2.02 | 2.230 | 22.30 | 23.40 | -4.70 | |
| E | 12/7/2016 | Body | D2450V2 SN:706 | 5/10/2017 | 5.140 | 51.40 | 49.50 | 3.84 | 2.360 | 23.60 | 23.30 | 1.29 | 13,14 |
| F | 12/5/2016 | Body | D5GHzV2 SN:1138 (5.2 GHz) | 9/22/2017 | 7.510 | 75.10 | 74.20 | 1.21 | 2.120 | 21.20 | 20.90 | 1.44 | |
| F | 12/8/2016 | Body | D5GHzV2 SN:1138 (5.2 GHz) | 9/22/2017 | 7.820 | 78.20 | 74.20 | 5.39 | 2.210 | 22.10 | 20.90 | 5.74 | 15,16 |
| F | 12/12/2016 | Body | D5GHzV2 SN:1138 (5.2 GHz) | 9/22/2017 | 7.220 | 72.20 | 74.20 | -2.70 | 2.040 | 20.40 | 20.90 | -2.39 | |
| G | 12/7/2016 | Body | D2450V2 SN:706 | 5/10/2017 | 5.210 | 52.10 | 49.50 | 5.25 | 2.380 | 23.80 | 23.30 | 2.15 | 17,18 |
| G | 12/8/2016 | Body | D5GHzV2 SN:1168 (5.6 GHz) | 11/14/2017 | 8.430 | 84.30 | 78.60 | 7.25 | 2.350 | 23.50 | 22.00 | 6.82 | 19,20 |
| G | 12/8/2016 | Body | D5GHzV2 SN:1168 (5.8 GHz) | 11/14/2017 | 7.600 | 76.00 | 73.90 | 2.84 | 2.110 | 21.10 | 20.50 | 2.93 | |
| G | 12/12/2016 | Body | D5GHzV2 SN:1168 (5.6 GHz) | 11/14/2017 | 8.360 | 83.60 | 78.60 | 6.36 | 2.320 | 23.20 | 22.00 | 5.45 | |
| H | 12/8/2016 | Body | D5GHzV2 SN:1138 (5.2 GHz) | 9/22/2017 | 7.690 | 76.90 | 74.20 | 3.64 | 2.170 | 21.70 | 20.90 | 3.83 | |
| H | 12/8/2016 | Body | D5GHzV2 SN:1138 (5.8 GHz) | 9/22/2017 | 7.970 | 79.70 | 75.70 | 5.28 | 2.230 | 22.30 | 21.10 | 5.69 | |
| H | 12/12/2016 | Body | D5GHzV2 SN:1138 (5.2 GHz) | 9/22/2017 | 8.100 | 81.00 | 74.20 | 9.16 | 2.260 | 22.60 | 20.90 | 8.13 | 21,22 |
| H | 12/13/2016 | Body | D5GHzV2 SN:1138 (5.6 GHz) | 9/22/2017 | 7.850 | 78.50 | 78.80 | -0.38 | 2.170 | 21.70 | 22.00 | -1.36 | |
| H | 12/13/2016 | Body | D5GHzV2 SN:1138 (5.8 GHz) | 9/22/2017 | 7.070 | 70.70 | 75.70 | -6.61 | 1.980 | 19.80 | 21.10 | -6.16 | |

9. Conducted Output Power Measurements

9.1. Wi-Fi SISO

Measured Results

| Band (GHz) | Mode | No. of Transmitters | Ch # | Freq. (MHz) | Max. Avg. RF Output Power (dBm) | |
|------------|----------------|---------------------|------|-------------|---------------------------------|-----------|
| | | | | | Antenna A | Antenna B |
| 2.4 | 802.11b | 1 Tx | 1 | 2412 | 16.0 | 15.5 |
| | | | 6 | 2437 | 16.0 | 15.5 |
| | | | 11 | 2462 | 16.0 | 15.5 |
| Band (GHz) | Mode | No. of Transmitters | Ch # | Freq. (MHz) | Max. Avg. RF Output Power (dBm) | |
| | | | | | Antenna A | Antenna B |
| 5.3 | 802.11n HT40 | 1 Tx | 54 | 5270 | 16.5 | 16.5 |
| | | | 62 | 5310 | 14.5 | 14.5 |
| Band (GHz) | Mode | No. of Transmitters | Ch # | Freq. (MHz) | Max. Avg. RF Output Power (dBm) | |
| | | | | | Antenna A | Antenna B |
| 5.5 | 802.11ac VHT80 | 1 Tx | 106 | 5530 | 14.0 | 14.0 |
| | | | 122 | 5610 | 16.5 | 17.0 |
| | | | 138 | 5690 | 16.5 | 17.0 |
| Band (GHz) | Mode | No. of Transmitters | Ch # | Freq. (MHz) | Max. Avg. RF Output Power (dBm) | |
| | | | | | Antenna A | Antenna B |
| 5.8 | 802.11ac VHT80 | 1 Tx | 155 | 5775 | 16.0 | 16.5 |

Note(s):

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures.

9.2. WLAN MIMO

Measured Results

| Band (GHz) | Mode | No. of Transmitters | Ch # | Freq. (MHz) | Max. Avg. RF Output Power (dBm) | |
|------------|--------------------|---------------------|------|-------------|---------------------------------|-----------|
| | | | | | Antenna A | Antenna B |
| 2.4 | 802.11g CDD | 2 Tx | 2 | 2417 | 16.0 | 15.5 |
| | | | 6 | 2437 | 16.0 | 15.5 |
| | | | 10 | 2457 | 16.0 | 15.5 |
| Band (GHz) | Mode | No. of Transmitters | Ch # | Freq. (MHz) | Max. Avg. RF Output Power (dBm) | |
| | | | | | Antenna A | Antenna B |
| 5.3 | 802.11n HT40 CDD | 2 Tx | 54 | 5270 | 16.5 | 16.5 |
| | | | 62 | 5310 | 13.0 | 13.0 |
| Band (GHz) | Mode | No. of Transmitters | Ch # | Freq. (MHz) | Max. Avg. RF Output Power (dBm) | |
| | | | | | Antenna A | Antenna B |
| 5.5 | 802.11ac VHT80 CDD | 2 Tx | 106 | 5530 | 13.0 | 13.0 |
| | | | 122 | 5610 | 16.5 | 17.0 |
| | | | 138 | 5690 | 16.5 | 17.0 |
| Band (GHz) | Mode | No. of Transmitters | Ch # | Freq. (MHz) | Max. Avg. RF Output Power (dBm) | |
| | | | | | Antenna A | Antenna B |
| 5.8 | 802.11n HT40 CDD | 2 Tx | 151 | 5755 | 16.5 | 16.3 |
| | | | 159 | 5795 | 16.5 | 16.5 |

Note(s):

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures.

9.3. Bluetooth

P_{High} Average Power Measured Results

| Band (GHz) | Mode | Ch # | Freq. (MHz) | Avg Pwr (dBm) |
|------------|------|------|-------------|---------------|
| 2.4 | GFSK | 0 | 2402 | 17.0 |
| | | 39 | 2441 | 16.8 |
| | | 78 | 2480 | 17.0 |

P_{Low} Average Power Measured Results

| Band (GHz) | Mode | Ch # | Freq. (MHz) | Avg Pwr (dBm) |
|------------|------|------|-------------|---------------|
| 2.4 | GFSK | 0 | 2402 | 10.0 |
| | | 39 | 2441 | 10.0 |
| | | 78 | 2480 | 10.0 |


Note(s):

Bluetooth P_{low} is triggered when 5 GHz Wi-Fi is on. Functional description of this mode is provided in technical description documents.

Duty Factor Measured Results

| Mode | Type | T on (ms) | Period (ms) | Duty Cycle | Crest Factor (1/duty cycle) |
|------|------|-----------|-------------|------------|-----------------------------|
| GFSK | DH1 | 2.88 | 3.75 | 76.80% | 1.30 |
| | DH3 | 2.88 | 3.75 | 76.80% | 1.30 |
| | DH5 | 2.88 | 3.75 | 76.80% | 1.30 |

GFSK Duty Cycle Plot

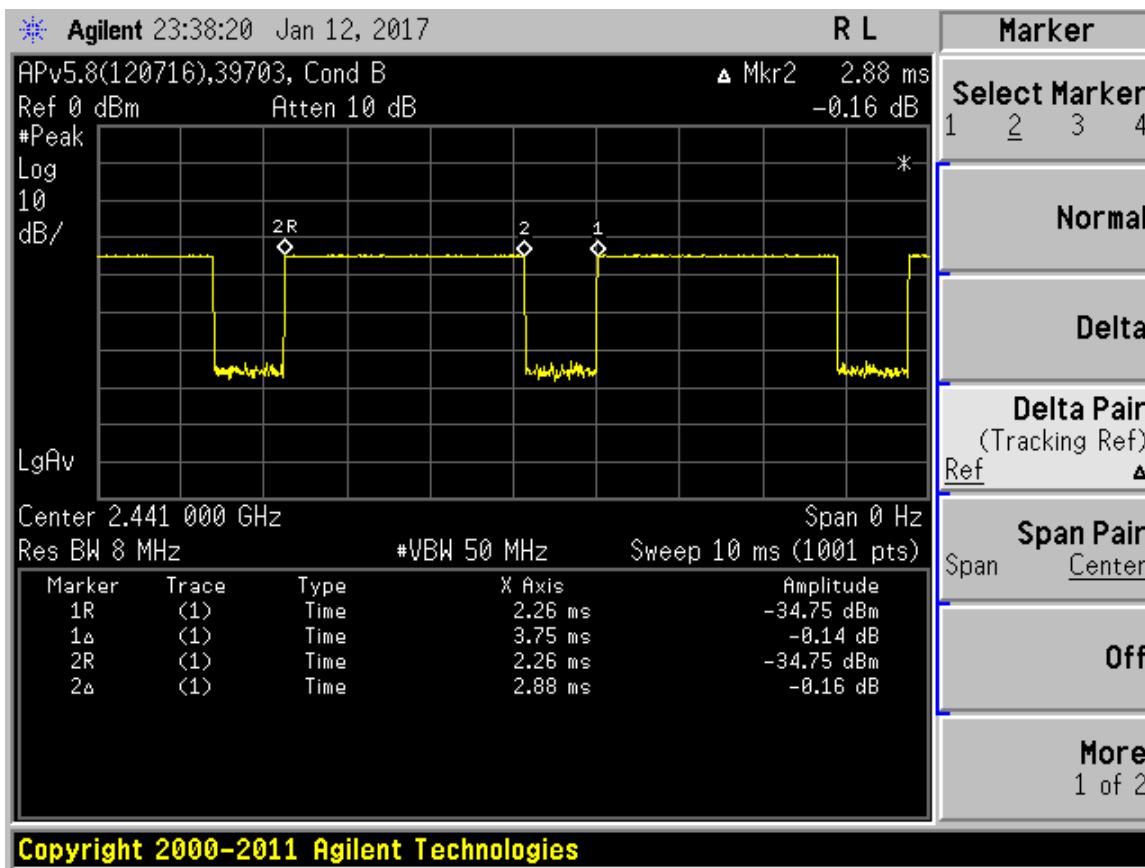

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- $\leq 0.8 \text{ W/kg}$ or 2.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\leq 100 \text{ MHz}$
- $\leq 0.6 \text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- $\leq 0.4 \text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200 \text{ MHz}$

KDB 248227 D01 SAR meas for 802.11:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- $\leq 0.4 \text{ W/kg}$, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- $> 0.4 \text{ W/kg}$, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closest/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is $\leq 0.8 \text{ W/kg}$ or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is $> 0.8 \text{ W/kg}$, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is $\leq 1.2 \text{ W/kg}$ or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is $\leq 1.2 \text{ W/kg}$, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is $\leq 1.2 \text{ W/kg}$, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

10.1. Wi-Fi (DTS Band)

Variant 1

| Band | No. of Transmitters | Mode | Dist. (mm) | Position | Ch #. | Freq. (MHz) | Power (dBm) | | | | SAR (W/kg) | | | | | | | | Plots | |
|---------|---------------------|-------------|------------|----------|-------|-------------|---------------|----------|---------------|----------|------------|--------|----------|--------|-----------|-------|-------|-------|-------|--|
| | | | | | | | Antenna A | | Antenna B | | Antenna A | | | | Antenna B | | | | | |
| | | | | | | | Tune-up Limit | Measured | Tune-up Limit | Measured | Measured | Scaled | Measured | Scaled | 1-g | 10-g | 1-g | 10-g | | |
| 2.4 GHz | 1 Tx | 802.11b | 0 | Rear | 6 | 2437 | 16.0 | 16.0 | | | 0.094 | 0.043 | 0.094 | 0.043 | | | | | | |
| | | | | Edge 3 | 6 | 2437 | 16.0 | 16.0 | | | 0.821 | 0.264 | 0.821 | 0.264 | | | | | | |
| | | | | Edge 3 | 11 | 2462 | 16.0 | 16.0 | | | 1.120 | 0.364 | 1.120 | 0.364 | | | | | 1 | |
| | | | | Edge 4 | 6 | 2437 | 16.0 | 16.0 | | | 0.184 | 0.083 | 0.184 | 0.083 | | | | | | |
| 2.4 GHz | 1 Tx | 802.11b | 0 | Rear | 6 | 2437 | | | 15.5 | 15.5 | | | | | 0.074 | 0.035 | 0.074 | 0.035 | | |
| | | | | Edge 2 | 6 | 2437 | | | 15.5 | 15.5 | | | | | 0.143 | 0.067 | 0.143 | 0.067 | | |
| | | | | Edge 3 | 6 | 2437 | | | 15.5 | 15.5 | | | | | 0.856 | 0.283 | 0.856 | 0.283 | | |
| | | | | Edge 3 | 11 | 2462 | | | 15.5 | 15.5 | | | | | 1.110 | 0.361 | 1.110 | 0.361 | | |
| 2.4 GHz | 2 Tx | 802.11g CDD | 0 | Rear | 6 | 2437 | 16.0 | 16.0 | 15.5 | 15.5 | 0.085 | 0.040 | 0.085 | 0.040 | 0.064 | 0.031 | 0.064 | 0.031 | | |
| | | | | Edge 2 | 6 | 2437 | 16.0 | 16.0 | 15.5 | 15.5 | - | - | - | - | 0.132 | 0.062 | 0.132 | 0.062 | | |
| | | | | Edge 3 | 6 | 2437 | 16.0 | 16.0 | 15.5 | 15.5 | 0.769 | 0.250 | 0.769 | 0.250 | 0.896 | 0.293 | 0.896 | 0.293 | | |
| | | | | Edge 3 | 10 | 2457 | 16.0 | 16.0 | 15.5 | 15.5 | 0.998 | 0.324 | 0.998 | 0.324 | 1.020 | 0.333 | 1.020 | 0.333 | | |
| | | | | Edge 4 | 6 | 2437 | 16.0 | 16.0 | 15.5 | 15.5 | 0.164 | 0.074 | 0.164 | 0.074 | - | - | - | - | | |

Variant 2 Spot Check

| Band | No. of Transmitters | Mode | Dist. (mm) | Position | Ch #. | Freq. (MHz) | Power (dBm) | | | | SAR (W/kg) | | | | | | | | Plots | |
|---------|---------------------|---------|------------|----------|-------|-------------|---------------|----------|---------------|----------|------------|--------|----------|--------|-----------|------|-----|------|-------|--|
| | | | | | | | Antenna A | | Antenna B | | Antenna A | | | | Antenna B | | | | | |
| | | | | | | | Tune-up Limit | Measured | Tune-up Limit | Measured | Measured | Scaled | Measured | Scaled | 1-g | 10-g | 1-g | 10-g | | |
| 2.4 GHz | 1 Tx | 802.11b | 0 | Edge 3 | 11 | 2462 | 16.0 | 16.0 | | | 0.958 | 0.317 | 0.958 | 0.317 | | | | | | |

Note(s):

SAR values represented by “-” indicate the absence of a secondary peak within 2 dB of the maximum peak and therefore no detectable secondary zoom scan.

10.2. Wi-Fi (U-NII-2A Band)

Variant 1

| Band | No. of Transmitters | Mode | Dist. (mm) | Position | Ch #. | Freq. (MHz) | Power (dBm) | | | | SAR (W/kg) | | | | | | | | Plots | |
|---------|---------------------|------------------|------------|----------|-------|-------------|---------------|----------|---------------|----------|------------|--------|----------|--------|-----------|-------|-------|-------|-------|--|
| | | | | | | | Antenna A | | Antenna B | | Antenna A | | | | Antenna B | | | | | |
| | | | | | | | Tune-up Limit | Measured | Tune-up Limit | Measured | Measured | Scaled | Measured | Scaled | 1-g | 10-g | 1-g | 10-g | | |
| 5.3 GHz | 1 Tx | 802.11n HT40 | 0 | Rear | 54 | 5270 | 17.0 | 16.5 | | | 0.046 | 0.018 | 0.052 | 0.020 | | | | | | |
| | | | | Edge 3 | 54 | 5270 | 17.0 | 16.5 | | | 0.917 | 0.298 | 1.029 | 0.334 | | | | | | |
| | | | | Edge 4 | 62 | 5310 | 14.5 | 14.5 | | | 0.661 | 0.212 | 0.661 | 0.212 | | | | | | |
| 5.3 GHz | 1 Tx | 802.11n HT40 | 0 | Rear | 54 | 5270 | 17.0 | 16.5 | | | 0.083 | 0.032 | 0.093 | 0.036 | | | | | | |
| | | | | Edge 2 | 54 | 5270 | | | 17.0 | 16.5 | | | | | 0.041 | 0.016 | 0.046 | 0.018 | | |
| | | | | Edge 3 | 54 | 5270 | | | 17.0 | 16.5 | | | | | 0.085 | 0.031 | 0.095 | 0.035 | | |
| | | | | Edge 3 | 62 | 5310 | | | 17.0 | 16.5 | | | | | 0.924 | 0.308 | 1.037 | 0.346 | | |
| 5.3 GHz | 2 Tx | 802.11n HT40 CDD | 0 | Rear | 54 | 5270 | 17.0 | 16.5 | 17.0 | 16.5 | 0.053 | 0.021 | 0.059 | 0.024 | 0.051 | 0.020 | 0.058 | 0.022 | | |
| | | | | Edge 2 | 54 | 5270 | 17.0 | 16.5 | 17.0 | 16.5 | - | - | - | - | 0.071 | 0.026 | 0.080 | 0.030 | | |
| | | | | Edge 3 | 54 | 5270 | 17.0 | 16.5 | 17.0 | 16.5 | 0.918 | 0.292 | 1.030 | 0.328 | 1.030 | 0.339 | 1.156 | 0.380 | 2 | |
| | | | | Edge 3 | 62 | 5310 | 13.5 | 13.0 | 13.5 | 13.0 | 0.413 | 0.130 | 0.463 | 0.146 | 0.383 | 0.124 | 0.430 | 0.139 | | |
| | | | | Edge 4 | 54 | 5270 | 17.0 | 16.5 | 17.0 | 16.5 | 0.091 | 0.031 | 0.102 | 0.034 | - | - | - | - | | |

Variant 2 Spot Check

| Band | No. of Transmitters | Mode | Dist. (mm) | Position | Ch #. | Freq. (MHz) | Power (dBm) | | | | SAR (W/kg) | | | | | | | | Plots | |
|---------|---------------------|--------------|------------|----------|-------|-------------|---------------|----------|---------------|----------|------------|--------|----------|--------|-----------|-------|-------|-------|-------|--|
| | | | | | | | Antenna A | | Antenna B | | Antenna A | | | | Antenna B | | | | | |
| | | | | | | | Tune-up Limit | Measured | Tune-up Limit | Measured | Measured | Scaled | Measured | Scaled | 1-g | 10-g | 1-g | 10-g | | |
| 5.3 GHz | 2 Tx | 802.11n HT40 | 0 | Edge 3 | 54 | 5270 | 17.0 | 16.5 | 17.0 | 16.5 | 0.852 | 0.271 | 0.956 | 0.304 | 0.895 | 0.297 | 1.004 | 0.333 | | |

Note(s):

SAR values represented by “-” indicate the absence of a secondary peak within 2 dB of the maximum peak and therefore no detectable secondary zoom scan.

10.3. Wi-Fi (U-NII-2C Band)

Variant 1

| Band | No. of Transmitters | Mode | Dist. (mm) | Position | Ch #. | Freq. (MHz) | Power (dBm) | | | | SAR (W/kg) | | | | | | | | Plots | |
|---------|---------------------|--------------------|------------|----------|-------|-------------|---------------|----------|---------------|----------|------------|--------|----------|--------|-----------|-------|-------|-------|-------|--|
| | | | | | | | Antenna A | | Antenna B | | Antenna A | | | | Antenna B | | | | | |
| | | | | | | | Tune-up Limit | Measured | Tune-up Limit | Measured | Measured | Scaled | Measured | Scaled | 1-g | 10-g | 1-g | 10-g | | |
| 5.5 GHz | 1 Tx | 802.11ac VHT80 | 0 | Rear | 122 | 5610 | 16.5 | 16.5 | | | 0.066 | 0.021 | 0.066 | 0.021 | | | | | | |
| | | | | Edge 3 | 122 | 5610 | 16.5 | 16.5 | | | 0.953 | 0.279 | 0.953 | 0.279 | | | | | | |
| | | | | 138 | 5690 | 16.5 | 16.5 | | | 0.925 | 0.283 | 0.925 | 0.283 | | | | | | | |
| | | | | Edge 4 | 122 | 5610 | 16.5 | 16.5 | | | 0.133 | 0.045 | 0.133 | 0.045 | | | | | | |
| 5.5 GHz | 1 Tx | 802.11ac VHT80 | 0 | Rear | 122 | 5610 | | | 17.0 | 17.0 | | | | | 0.063 | 0.023 | 0.063 | 0.023 | | |
| | | | | Edge 2 | 122 | 5610 | | | 17.0 | 17.0 | | | | | 0.134 | 0.042 | 0.134 | 0.042 | | |
| | | | | 122 | 5610 | | | | 17.0 | 17.0 | | | | | 1.110 | 0.355 | 1.110 | 0.355 | | |
| | | | | 138 | 5690 | | | | 17.0 | 17.0 | | | | | 1.180 | 0.389 | 1.180 | 0.389 | 3 | |
| 5.5 GHz | 2 Tx | 802.11ac VHT80 CDD | 0 | Rear | 122 | 5610 | 16.5 | 16.5 | 17.0 | 17.0 | 0.046 | 0.015 | 0.046 | 0.015 | 0.044 | 0.018 | 0.044 | 0.018 | | |
| | | | | Edge 2 | 122 | 5610 | 16.5 | 16.5 | 17.0 | 17.0 | - | - | - | - | 0.132 | 0.044 | 0.132 | 0.044 | | |
| | | | | 122 | 5610 | 16.5 | 16.5 | 17.0 | 17.0 | 0.995 | 0.288 | 0.995 | 0.288 | 1.110 | 0.338 | 1.110 | 0.338 | | | |
| | | | | 138 | 5690 | 16.5 | 16.5 | 17.0 | 17.0 | 0.968 | 0.303 | 0.968 | 0.303 | 1.160 | 0.381 | 1.160 | 0.381 | | | |
| | | | | Edge 4 | 122 | 5610 | 16.5 | 16.5 | 17.0 | 17.0 | 0.004 | 0.001 | 0.004 | 0.001 | - | - | - | - | | |

Variant 2 Spot Check

| Band | No. of Transmitters | Mode | Dist. (mm) | Position | Ch #. | Freq. (MHz) | Power (dBm) | | | | SAR (W/kg) | | | | | | | | Plots | |
|---------|---------------------|----------------|------------|----------|-------|-------------|---------------|----------|---------------|----------|------------|--------|----------|--------|-----------|-------|-------|-------|-------|--|
| | | | | | | | Antenna A | | Antenna B | | Antenna A | | | | Antenna B | | | | | |
| | | | | | | | Tune-up Limit | Measured | Tune-up Limit | Measured | Measured | Scaled | Measured | Scaled | 1-g | 10-g | 1-g | 10-g | | |
| 5.5 GHz | 1 Tx | 802.11ac VHT80 | 0 | Edge 3 | 138 | 5690 | | | 17.0 | 17.0 | | | | | 1.030 | 0.343 | 1.030 | 0.343 | | |

Note(s):

SAR values represented by “-” indicate the absence of a secondary peak within 2 dB of the maximum peak and therefore no detectable secondary zoom scan.

10.4. Wi-Fi (U-NII-3 Band)

Variant 1

| Band | No. of Transmitters | Mode | Dist. (mm) | Position | Ch #. | Freq. (MHz) | Power (dBm) | | | | SAR (W/kg) | | | | | | | | Plots | |
|---------|---------------------|------------------|------------|----------|-------|-------------|---------------|----------|---------------|----------|------------|--------|----------|--------|-----------|-------|-------|-------|-------|--|
| | | | | | | | Antenna A | | Antenna B | | Antenna A | | | | Antenna B | | | | | |
| | | | | | | | Tune-up Limit | Measured | Tune-up Limit | Measured | Measured | Scaled | Measured | Scaled | 1-g | 10-g | 1-g | 10-g | | |
| 5.8 GHz | 1 Tx | 802.11ac VHT80 | 0 | Rear | 155 | 5775 | 16.5 | 16.0 | | | 0.072 | 0.022 | 0.081 | 0.025 | | | | | | |
| | | | | Edge 3 | 155 | 5775 | 16.5 | 16.0 | | | 0.896 | 0.276 | 1.005 | 0.310 | | | | | 4 | |
| | | | | Edge 4 | 155 | 5775 | 16.5 | 16.0 | | | 0.085 | 0.029 | 0.095 | 0.033 | | | | | | |
| 5.8 GHz | 1 Tx | 802.11ac VHT80 | 0 | Rear | 155 | 5775 | | | 16.5 | 16.5 | | | | | 0.068 | 0.022 | 0.068 | 0.022 | | |
| | | | | Edge 2 | 155 | 5775 | | | 16.5 | 16.5 | | | | | 0.129 | 0.044 | 0.129 | 0.044 | | |
| | | | | Edge 3 | 155 | 5775 | | | 16.5 | 16.5 | | | | | 0.886 | 0.307 | 0.886 | 0.307 | | |
| 5.8 GHz | 2 Tx | 802.11n HT40 CDD | 0 | Rear | 159 | 5795 | 16.5 | 16.5 | 16.5 | 16.5 | 0.076 | 0.023 | 0.076 | 0.023 | 0.064 | 0.022 | 0.064 | 0.022 | | |
| | | | | Edge 2 | 159 | 5795 | 16.5 | 16.5 | 16.5 | 16.5 | - | - | - | - | 0.122 | 0.040 | 0.122 | 0.040 | | |
| | | | | 151 | 5755 | 16.5 | 16.5 | 16.5 | 16.3 | 0.978 | 0.308 | 0.978 | 0.308 | 0.780 | 0.280 | 0.817 | 0.293 | | | |
| | | | | 159 | 5795 | 16.5 | 16.5 | 16.5 | 16.5 | 1.000 | 0.313 | 1.000 | 0.313 | 0.842 | 0.289 | 0.842 | 0.289 | | | |
| | | | | Edge 4 | 159 | 5795 | 16.5 | 16.5 | 16.5 | 16.5 | 0.116 | 0.035 | 0.116 | 0.035 | - | - | - | - | | |

Variant 2 Spot Check

| Band | No. of Transmitters | Mode | Dist. (mm) | Position | Ch #. | Freq. (MHz) | Power (dBm) | | | | SAR (W/kg) | | | | | | | | Plots | |
|--------|---------------------|----------------|------------|----------|-------|-------------|---------------|----------|---------------|----------|------------|--------|----------|--------|-----------|------|-----|------|-------|--|
| | | | | | | | Antenna A | | Antenna B | | Antenna A | | | | Antenna B | | | | | |
| | | | | | | | Tune-up Limit | Measured | Tune-up Limit | Measured | Measured | Scaled | Measured | Scaled | 1-g | 10-g | 1-g | 10-g | | |
| 5.8GHz | 1 Tx | 802.11ac VHT80 | 0 | Edge 3 | 155 | 5775 | 16.5 | 16.0 | | | 0.837 | 0.259 | 0.939 | 0.291 | | | | | | |

Note(s):

SAR values represented by “-” indicate the absence of a secondary peak within 2 dB of the maximum peak and therefore no detectable secondary zoom scan.

10.5. Bluetooth (P_{High})

Variant 1

| Band | No. of Transmitters | Mode | Dist. (mm) | Position | Ch #. | Freq. (MHz) | Power (dBm) | | SAR (W/kg) | | | | Plots |
|-----------|---------------------|------|------------|----------|-------|-------------|---------------|----------|------------|-------|--------|-------|-------|
| | | | | | | | Tune-up Limit | Measured | Measured | | Scaled | | |
| | | | | | | | | | | 1-g | 10-g | 1-g | 10-g |
| Bluetooth | 1 Tx | GFSK | 0 | Rear | 39 | 2441 | 17.0 | 16.8 | 0.071 | 0.033 | 0.074 | 0.035 | |
| | | | | Edge 3 | 0 | 2402 | 17.0 | 17.0 | 0.726 | 0.234 | 0.726 | 0.234 | |
| | | | | Edge 3 | 39 | 2441 | 17.0 | 16.8 | 0.835 | 0.272 | 0.874 | 0.285 | |
| | | | | Edge 4 | 78 | 2480 | 17.0 | 17.0 | 1.170 | 0.384 | 1.170 | 0.384 | 5 |
| | | | | Edge 4 | 39 | 2441 | 17.0 | 16.8 | 0.177 | 0.080 | 0.185 | 0.084 | |

Variant 2

| Band | No. of Transmitters | Mode | Dist. (mm) | Position | Ch #. | Freq. (MHz) | Power (dBm) | | SAR (W/kg) | | | | Plots |
|-----------|---------------------|------|------------|----------|-------|-------------|---------------|----------|------------|-------|--------|-------|-------|
| | | | | | | | Tune-up Limit | Measured | Measured | | Scaled | | |
| | | | | | | | | | | 1-g | 10-g | 1-g | 10-g |
| Bluetooth | 1 Tx | GFSK | 0 | Edge 3 | 78 | 2480 | 17.0 | 16.8 | 0.968 | 0.320 | 1.014 | 0.335 | |

10.6. Bluetooth (P_{Low})

Variant 1

| Band | No. of Transmitters | Mode | Dist. (mm) | Position | Ch #. | Freq. (MHz) | Power (dBm) | | SAR (W/kg) | | | | Plots |
|-----------|---------------------|------|------------|----------|-------|-------------|---------------|----------|------------|-------|--------|-------|-------|
| | | | | | | | Tune-up Limit | Measured | Measured | | Scaled | | |
| | | | | | | | | | | 1-g | 10-g | 1-g | 10-g |
| Bluetooth | 1 Tx | GFSK | 0 | Rear | 39 | 2441 | 10.0 | 10.0 | 0.013 | 0.005 | 0.013 | 0.005 | |
| | | | | Edge 3 | 39 | 2441 | 10.0 | 10.0 | 0.195 | 0.063 | 0.195 | 0.063 | |
| | | | | Edge 4 | 39 | 2441 | 10.0 | 10.0 | 0.032 | 0.014 | 0.032 | 0.014 | |

Note(s):

Bluetooth P_{low} is triggered when 5 GHz Wi-Fi is on. Functional description of this mode is provided in technical description documents.

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is <0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is \geq 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or 3 (1-g or 10-g respectively) or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg ($\sim 10\%$ from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 or 3 (1-g or 10-g respectively).

| Frequency Band (MHz) | Air Interface | RF Exposure Conditions | Test Position | Repeated SAR (Yes/No) | Highest Measured SAR (W/kg) | First Repeated | | Second Repeated | |
|----------------------|--------------------|------------------------|---------------|-----------------------|-----------------------------|---------------------|-------------------------------|---------------------|-------------------------------|
| | | | | | | Measured SAR (W/kg) | Largest to Smallest SAR Ratio | Measured SAR (W/kg) | Largest to Smallest SAR Ratio |
| 2400 | Wi-Fi 802.11b/g/n | Standalone | Edge 3 | No | 1.120 | N/A | N/A | N/A | N/A |
| | BT | Standalone | Edge 3 | Yes | 1.170 | 1.170 | 1.00 | N/A | N/A |
| 5300 | Wi-Fi 802.11a/n/ac | Standalone | Edge 3 | Yes | 1.030 | 0.952 | 1.08 | N/A | N/A |
| 5500 | Wi-Fi 802.11a/n/ac | Standalone | Edge 3 | Yes | 1.180 | 1.16 | 1.02 | N/A | N/A |
| 5800 | Wi-Fi 802.11a/n/ac | Standalone | Edge 3 | Yes | 1.000 | 0.917 | 1.09 | N/A | N/A |

Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 or 3 (1-g or 10-g respectively).

12. Simultaneous Transmission SAR Analysis

According to KDB 447498 D01, when the sum of SAR exceeds the limit for a combination of simultaneously transmitting antennas, SAR test exclusion is determined by the SAR to peak location separation ratio (SPLSR) between pairs of antennas within the combination. SPLSR is determined by $(\text{SAR}_1 + \text{SAR}_2)^{1.5} / \text{Ri}$, where SAR_1 and SAR_2 are the highest reported or estimated SAR values for each antenna, and Ri is the separation distance between the SAR peak locations. SAR peak locations and Ri are to be determined differently depending on the SAR values involved- measured or estimated- and all coordinates must be clearly identified in the report.

To qualify for SAR test exclusion by way of SPLSR, each antenna in the combination must be evaluated one pair at a time, and the SPLSR for all pairs must be ≤ 0.04 and 0.10 , respectively, for 1-g and 10-g SAR evaluation.

Simultaneous Transmission Condition

| RF Exposure Condition | Item | Capable Transmit Configurations | | |
|-----------------------|------|---------------------------------|------------------------------|---------------------------|
| Body | 1 | WLAN ONLY | + Antenna A Wi-Fi 5 GHz SISO | + Bluetooth (P_{low}) |
| | 2 | | + Antenna B Wi-Fi 5 GHz SISO | + Bluetooth (P_{low}) |
| | 3 | | + Wi-Fi 5 GHz MIMO | + Bluetooth (P_{low}) |

Note:

1. Wi-Fi 2.4GHz cannot transmit simultaneously with Bluetooth Radio.

Estimated SAR for Simultaneous Transmission SAR Analysis

Considerations for SAR estimation

1. When standalone SAR test exclusion applies, standalone SAR must also be estimated to determine simultaneous transmission SAR test exclusion.
2. Dedicated Host Approach criteria for SAR test exclusion is likewise applied to SAR estimation, with certain distinctions between test exclusion and SAR estimation:
 - o When the separation distance from the antenna to an adjacent edge is ≤ 5 mm, a distance of 5 mm is applied for SAR estimation; this is the same between test exclusion and SAR estimation calculations.
 - o When the separation distance from the antenna to an adjacent edge is > 5 mm but ≤ 50 mm, the actual antenna-to-edge separation distance is applied for SAR estimation.
 - o When the minimum test separation distance is > 50 mm, the estimated SAR value is 0.4 W/kg
3. Please refer to Estimated SAR Tables to see which test positions are inherently compliant as they consist of only estimated SAR values for all applicable transmitters and consequently will always have sum of SAR values < 1.2 W/kg. Simultaneous transmission SAR analysis was therefore not performed for these test positions.
4. For conditions where the estimated SAR is overly conservative for certain conditions, the test lab may choose to perform standalone SAR measurements and use the measured SAR to determine simultaneous transmission SAR test exclusion.

Estimated SAR for WLAN

| Tx Interface | Frequency (MHz) | Output Power | | Separation Distances (mm) | | | | | | Estimated 1-g SAR Value (W/kg) | | | | | |
|------------------|-----------------|--------------|----|---------------------------|--------|--------|--------|--------|-------|--------------------------------|--------|-----------|-----------|-----------|-------|
| | | dBm | mW | Rear | Edge 1 | Edge 2 | Edge 3 | Edge 4 | Front | Rear | Edge 1 | Edge 2 | Edge 3 | Edge 4 | Front |
| Antenna A | | | | | | | | | | | | | | | |
| Wi-Fi 2.4 GHz | 2462 | 16.00 | 40 | 6.56 | 227.53 | 128.27 | 3.4 | 10.96 | | -MEASURE- | 0.400 | 0.400 | -MEASURE- | -MEASURE- | |
| Wi-Fi 5.2 GHz | 5240 | 16.50 | 45 | 6.56 | 227.53 | 128.27 | 3.4 | 10.96 | | -MEASURE- | 0.400 | 0.400 | -MEASURE- | -MEASURE- | |
| Wi-Fi 5.3 GHz | 5320 | 17.00 | 50 | 6.56 | 227.53 | 128.27 | 3.4 | 10.96 | | -MEASURE- | 0.400 | 0.400 | -MEASURE- | -MEASURE- | |
| Wi-Fi 5.5 GHz | 5700 | 16.50 | 45 | 6.56 | 227.53 | 128.27 | 3.4 | 10.96 | | -MEASURE- | 0.400 | 0.400 | -MEASURE- | -MEASURE- | |
| Wi-Fi 5.8 GHz | 5825 | 16.50 | 45 | 6.56 | 227.53 | 128.27 | 3.4 | 10.96 | | -MEASURE- | 0.400 | 0.400 | -MEASURE- | -MEASURE- | |
| Bluetooth | 2480 | 17.00 | 50 | 6.56 | 227.53 | 128.27 | 3.4 | 10.96 | | -MEASURE- | 0.400 | 0.400 | -MEASURE- | -MEASURE- | |
| Antenna B | | | | | | | | | | | | | | | |
| Wi-Fi 2.4 GHz | 2462 | 15.50 | 35 | 6.56 | 227.53 | 12.04 | 3.4 | 128.27 | | -MEASURE- | 0.400 | -MEASURE- | -MEASURE- | 0.400 | |
| Wi-Fi 5.2 GHz | 5240 | 16.50 | 45 | 6.56 | 227.53 | 12.04 | 3.4 | 128.27 | | -MEASURE- | 0.400 | -MEASURE- | -MEASURE- | 0.400 | |
| Wi-Fi 5.3 GHz | 5320 | 17.00 | 50 | 6.56 | 227.53 | 12.04 | 3.4 | 128.27 | | -MEASURE- | 0.400 | -MEASURE- | -MEASURE- | 0.400 | |
| Wi-Fi 5.5 GHz | 5700 | 17.00 | 50 | 6.56 | 227.53 | 12.04 | 3.4 | 128.27 | | -MEASURE- | 0.400 | -MEASURE- | -MEASURE- | 0.400 | |
| Wi-Fi 5.8 GHz | 5825 | 16.50 | 45 | 6.56 | 227.53 | 12.04 | 3.4 | 128.27 | | -MEASURE- | 0.400 | -MEASURE- | -MEASURE- | 0.400 | |

12.1. Sum of the SAR for Wi-Fi and BT

| RF Exposure Condition | Test Position | Standalone SAR (W/kg) | | | | Σ 1-g SAR (W/g) | | |
|-----------------------|---------------|-----------------------|-----------------|---------------|-------------|--------------------------|--------------------------|------------------------|
| | | (A) | (B) | (C) | (D) | (A) +(D) | (B) +(D) | (C) +(D) |
| | | U-NII Ant. A | U-NII Ant. B | U-NII MIMO | BT P-Low | U-NII+BT Ant. A+P-Low | U-NII+BT Ant. B+P-Low | U-NII+BT MIMO+P-Low |
| Standalone | Rear | 0.081 | 0.068 | 0.076 | 0.013 | 0.094 | 0.081 | 0.089 |
| | Edge 2 | 0.400 | 0.134 | 0.132 | 0.400 | 0.800 | 0.534 | 0.532 |
| | Edge 3 | 1.029 | 1.180 | 1.160 | 0.195 | 1.224 | 1.375 | 1.355 |
| | Edge 4 | 0.133 | 0.400 | 0.116 | 0.032 | 0.165 | 0.432 | 0.148 |

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

Appendices

Refer to separated files for the following appendixes.

16U23813-S1V3 SAR_App A Setup Photos (STC_180days)

16U23813-S1V1 SAR_App B System Check Plots

16U23813-S1V1 SAR_App C Highest Test Plots

16U23813-S1V1 SAR_App D Tissue Ingredients

16U23813-S1V1 SAR_App E Probe Cal. Certificates

16U23813-S1V1 SAR_App F Dipole Cal. Certificates

END OF REPORT