



MEASUREMENT REPORT FCC Part 90

Applicant Name:

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

7/31/2018-10/18/2018

Test Site/Location:

PCTEST Lab. Morgan Hill, CA, USA

Test Report Serial No.:

1C1806220014-04-R1.BCG

| | |
|-------------------|-------------------|
| FCC ID: | BCGA1895 |
| APPLICANT: | Apple Inc. |

Application Type:

Certification

Model:

A1895

EUT Type:

Tablet Device

FCC Classification:

PCS Licensed Transmitter (PCB)

FCC Rule Part:

§2.1049, §90(R), §90(S)

Test Procedure(s):

ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01,

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1C1806220014-04-R1.BCG) supersedes and replaces the previously issued test report (S/N: 1C1806220014-04.BCG) on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President





| | | | |
|--|---------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA1895 | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 1 of 62 |

T A B L E O F C O N T E N T S

| | | |
|-------|---|----|
| 1.0 | INTRODUCTION | 4 |
| 1.1 | Scope | 4 |
| 1.2 | PCTEST Test Location | 4 |
| 1.3 | Test Facility / Accreditations | 4 |
| 2.0 | PRODUCT INFORMATION | 5 |
| 2.1 | Equipment Description | 5 |
| 2.2 | Device Capabilities | 5 |
| 2.3 | Device Capabilities | 5 |
| 2.4 | Test Support Equipment | 5 |
| 2.5 | Test Configuration | 6 |
| 2.6 | Software and Firmware | 6 |
| 2.7 | EMI Suppression Device(s)/Modifications | 6 |
| 3.0 | DESCRIPTION OF TESTS | 7 |
| 3.1 | Evaluation Procedure | 7 |
| 3.2 | Radiated Power and Radiated Spurious Emissions | 7 |
| 4.0 | MEASUREMENT UNCERTAINTY | 8 |
| 5.0 | TEST EQUIPMENT CALIBRATION DATA | 9 |
| 6.0 | SAMPLE CALCULATIONS | 10 |
| 7.0 | TEST RESULTS | 11 |
| 7.1 | Summary | 11 |
| 7.2 | Occupied Bandwidth | 12 |
| 7.3 | Spurious and Harmonic Emissions at Antenna Terminal | 22 |
| 7.4 | Band Edge Emissions at Antenna Terminal | 31 |
| 7.5 | Conducted Power Output Data | 40 |
| 7.6 | Radiated Power (ERP) | 45 |
| 7.7 | Radiated Spurious Emissions Measurements | 47 |
| 7.7.1 | ANT 3 (Port A) Radiated Spurious Emissions Measurements | 49 |
| 7.7.2 | ANT 1 (Port B) Radiated Spurious Emissions Measurements | 54 |
| 7.8 | Frequency Stability / Temperature Variation | 57 |
| 8.0 | CONCLUSION | 62 |

| | | |
|--|--|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device |



MEASUREMENT REPORT

FCC Part 90

| Mode | Tx Frequency (MHz) | Measurement | Max. Power (W) | Max. Power (dBm) | Emission Designator | Modulation |
|-------------|--------------------|-------------|----------------|------------------|---------------------|------------|
| LTE Band 14 | 790.5 - 795.5 | ERP | 0.092 | 19.64 | 4M54G7W | QPSK |
| LTE Band 14 | 790.5 - 795.5 | ERP | 0.079 | 19.00 | 4M52D7W | 16-QAM |
| LTE Band 14 | 790.5 - 795.5 | ERP | 0.059 | 17.72 | 4M54D7W | 64-QAM |
| LTE Band 14 | 793 | ERP | 0.092 | 19.65 | 9M02G7W | QPSK |
| LTE Band 14 | 793 | ERP | 0.078 | 18.92 | 9M04D7W | 16-QAM |
| LTE Band 14 | 793 | ERP | 0.059 | 17.71 | 9M05D7W | 64-QAM |
| LTE Band 26 | 814.7 - 823.3 | Conducted | 0.355 | 25.50 | 1M08G7W | QPSK |
| LTE Band 26 | 814.7 - 823.3 | Conducted | 0.305 | 24.84 | 1M08D7W | 16-QAM |
| LTE Band 26 | 814.7 - 823.3 | Conducted | 0.240 | 23.80 | 1M09D7W | 64-QAM |
| LTE Band 26 | 815.5 - 822.5 | Conducted | 0.355 | 25.50 | 2M71G7W | QPSK |
| LTE Band 26 | 815.5 - 822.5 | Conducted | 0.300 | 24.77 | 2M71D7W | 16-QAM |
| LTE Band 26 | 815.5 - 822.5 | Conducted | 0.241 | 23.82 | 2M70D7W | 64-QAM |
| LTE Band 26 | 816.5 - 821.5 | Conducted | 0.354 | 25.49 | 4M50G7W | QPSK |
| LTE Band 26 | 816.5 - 821.5 | Conducted | 0.313 | 24.95 | 4M49D7W | 16-QAM |
| LTE Band 26 | 816.5 - 821.5 | Conducted | 0.240 | 23.81 | 4M50D7W | 64-QAM |
| LTE Band 26 | 819 | Conducted | 0.352 | 25.46 | 9M01G7W | QPSK |
| LTE Band 26 | 819 | Conducted | 0.292 | 24.65 | 9M02D7W | 16-QAM |
| LTE Band 26 | 819 | Conducted | 0.230 | 23.62 | 9M03D7W | 64-QAM |

EUT Overview

| | | | | |
|--|---|----------------------------|--|---------------------------------|
| FCC ID: BCGA1895 | MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | | |

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Morgan Hill, CA 95037, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISED.

| | | | |
|--|--|----------------------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 4 of 62 |

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Inc. Tablet Device FCC ID: BCGA1895**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 90.543, and 90.691, and 90.542.

Test Device Serial No.: DLXX5035L3XD, DLXX503RL3XD

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, HDR4, HDR8, LE)

2.3 Device Capabilities

Following antenna was used for the testing.

| Frequency [MHz] | Antennas | |
|--------------------|----------|--------|
| | Port A | Port B |
| 700-800 | ANT 3 | ANT 1 |
| 820-960 | | |

Table 2-1. Antennas vs Ports

| Frequency [MHz] | Antenna Gain (dBi) | |
|--------------------|--------------------|--------|
| | Port A | Port B |
| 700-800 | -3.7 | -4.1 |
| 820-960 | -3.8 | -3.2 |

Table 2-2. Antenna Peak Gain

2.4 Test Support Equipment

| 1 | Apple MacBook w/AC/DC Adapter | Model: A1398 | S/N: C2QKP008F6F3 |
|---|----------------------------------|-----------------|------------------------|
| 2 | Apple USB-C Cable | Model: Chimp | S/N: 300C44 |
| 3 | USB-C Cable w/ AC Adapter | Model: A146 | S/N: N/A |
| 4 | USB-C to 3.5mm Aux Adapter | Model: A1720 | S/N: C3D8257A2EPGKVP2C |
| 4 | USB-C to 3.5mm Aux Adapter | Model: A2049 | S/N: DWH413100GJJKLT12 |
| 5 | DC Power Supply | Model: KPS3010D | S/N: N/A |

Table 2-3. Antenna Peak Gain

| | | | | |
|--|---------------------------------------|----------------------------|--|---------------------------------|
| FCC ID: BCGA1895 | MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | | |

2.5 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

There are two vendors of the WiFi/Bluetooth radio modules, variant 1 and variant 2. Both radio modules have the same mechanical outline, same on-board antenna matching circuit, identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. The worst case configuration was found between the two variants. The EUT was also investigated with and without charger.

The emissions below 1GHz and above 18GHz were tested with the highest transmitting power channel and the worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

2.6 Software and Firmware

The test was conducted with firmware version 16B64 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

| | | | |
|--|---|----------------------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 6 of 62 |

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

3.2 Radiated Power and Radiated Spurious Emissions

§2.1053, §90.635, §90.691, §90.543

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer “Channel Power” function with the integration band set to the emissions’ occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168 D01 v03r01.

Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power [Watts]})$ specified in 90.691 and 90.543.

For fundamental radiated power measurements, the guidance of KDB 971168 D01 v03r01 is used to record the EUT power level that is subsequently matched via the aforementioned substitution method given in ANSI/TIA-603-E-2016.

| | | | |
|--|---|----------------------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 7 of 62 |

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Contribution | Expanded Uncertainty (\pm dB) |
|----------------------------------|----------------------------------|
| Conducted Bench Top Measurements | 1.13 |
| Radiated Disturbance (<1GHz) | 4.98 |
| Radiated Disturbance (>1GHz) | 5.07 |
| Radiated Disturbance (>18GHz) | 5.09 |

| | | | |
|--|---|----------------------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 8 of 62 |

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

| Manufacturer | Model | Description | Cal Date | Cal Interval | Cal Due | Serial Number |
|-----------------------|-------------|--|------------|--------------|------------|---------------|
| ATM | 180-442A-KF | 20dB Nominal Gain Horn Antenna | 3/13/2018 | Annual | 3/13/2019 | T058601-02 |
| COM-POWER | LIN-120A | LISN | 3/7/2018 | Annual | 3/7/2019 | 241296 |
| ESPEC | SU-241 | Temperature Chamber | 8/10/2018 | Annual | 8/10/2019 | 92009574 |
| Keysight Technologies | N9030A | 3Hz-44GHz PXA Signal Analyzer | 2/27/2018 | Annual | 2/27/2019 | MY49430244 |
| Rohde & Schwarz | FSV40 | Signal Analyzer (10Hz-40GHz) | 2/6/2018 | Annual | 2/6/2019 | 101619 |
| Rohde & Schwarz | ESW44 | EMI Test Receiver | 12/20/2017 | Annual | 12/20/2018 | 101668 |
| Rohde & Schwarz | ESW44 | EMI Test Receiver | 11/16/2017 | Annual | 11/16/2018 | 101570 |
| Rohde & Schwarz | CMW500 | Wideband Radio Communication Tester | 6/11/2018 | Annual | 6/11/2019 | 161675 |
| Rohde & Schwarz | CMW500 | Wideband Radio Communication Tester | 4/16/2018 | Annual | 4/16/2019 | 161617 |
| Rohde & Schwarz | CMW500 | Wideband Radio Communication Tester | 12/8/2017 | Annual | 12/8/2018 | 164175 |
| Rohde & Schwarz | SFUNIT-RX | Shielded Filter Unit | 9/11/2017 | Annual | 9/11/2018 | 102132 |
| Rohde & Schwarz | SFUNIT-RX | Shielded Filter Unit | 12/11/2017 | Annual | 12/11/2018 | 102136 |
| Rohde & Schwarz | TS-PR1840 | Pre-Amplifier (18GHz - 40GHz) | 6/11/2018 | Annual | 6/11/2019 | 100051 |
| Rohde & Schwarz | TS-PR8 | Pre-Amplifier (30MHz - 8GHz) | 1/25/2018 | Annual | 1/25/2019 | 102333 |
| Rohde & Schwarz | HL562F | Ultra Broadband Antenna (30MHz - 6GHz) | 6/8/2018 | Annual | 6/8/2019 | 100810 |
| Rohde & Schwarz | TC-TA18 | Cross Polarized Vivaldi Antenna(400MHz-18GHz) | 11/13/2017 | Annual | 11/13/2018 | 101057 |
| Rohde & Schwarz | TC-TA18 | Cross Polarized Vivaldi Antenna (400MHz-18GHz) | 11/29/2017 | Annual | 11/29/2018 | 101063 |

Table 5-1. Test Equipment

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

| | | | | |
|--|---|----------------------------|--------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 9 of 62 | |

6.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm - (-24.80).

| | | | |
|--|---|----------------------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 10 of 62 |

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCGA1895
 FCC Classification: PCS Licensed Transmitter (PCB)
 Mode(s): LTE
 Band: Band 26 / Band 14

| FCC Part Section(s) | Test Description | Test Limit | Test Condition | Test Result | Reference |
|----------------------------|--|--|----------------|-------------|-------------------|
| 2.1049 | Occupied Bandwidth | N/A | CONDUCTED | PASS | Section 7.2 |
| 2.1051 90.691 90.543 | Conducted Band Edge / Spurious Emissions | On all frequencies between 769-775 MHz and 799-805 MHz, attenuation by a factor not less than $65 + 10\log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations. On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, attenuation by at least $43 + 10\log(P)$ dB. $> 43 + \log_{10}(P[\text{Watts}])$ for all out-of-band emissions except $> 50 + 10\log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge | | PASS | Sections 7.3, 7.4 |
| 2.1055 90.213 | Frequency Stability | < 2.5 ppm | | PASS | Section 7.8 |
| 2.1046 90.635 | Conducted Power | < 100 Watts | | PASS | Section 7.5 |
| 90.542 | Effective Radiated Power (Band 14) | < 3 Watts max. ERP | | PASS | Section 7.6 |
| 2.1053 90.691 90.543 | Radiated Spurious Emissions | $> 43 + \log_{10}(P[\text{Watts}])$ for all out-of-band emissions except $> 50 + 10\log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge | | PASS | Section 7.7 |

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Section 7.0 were taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "2G/3G Automation," Version 3.9.
- 5) All ports were investigated and only the worst case data was reported.

| | | | | |
|--|---|----------------------------|---------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 11 of 62 | |

7.2 Occupied Bandwidth

§2.1049

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

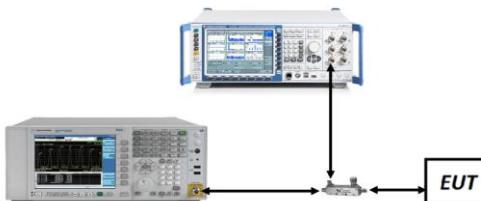


Figure 7-1. Test Instrument & Measurement Setup

Test Notes


None.

| | | | |
|--|---|----------------------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 12 of 62 |

LTE Band 26



Plot 7-1. Occupied Bandwidth Plot (LTE Band 26, 1.4MHz QPSK – RB Size 6– High Channel)

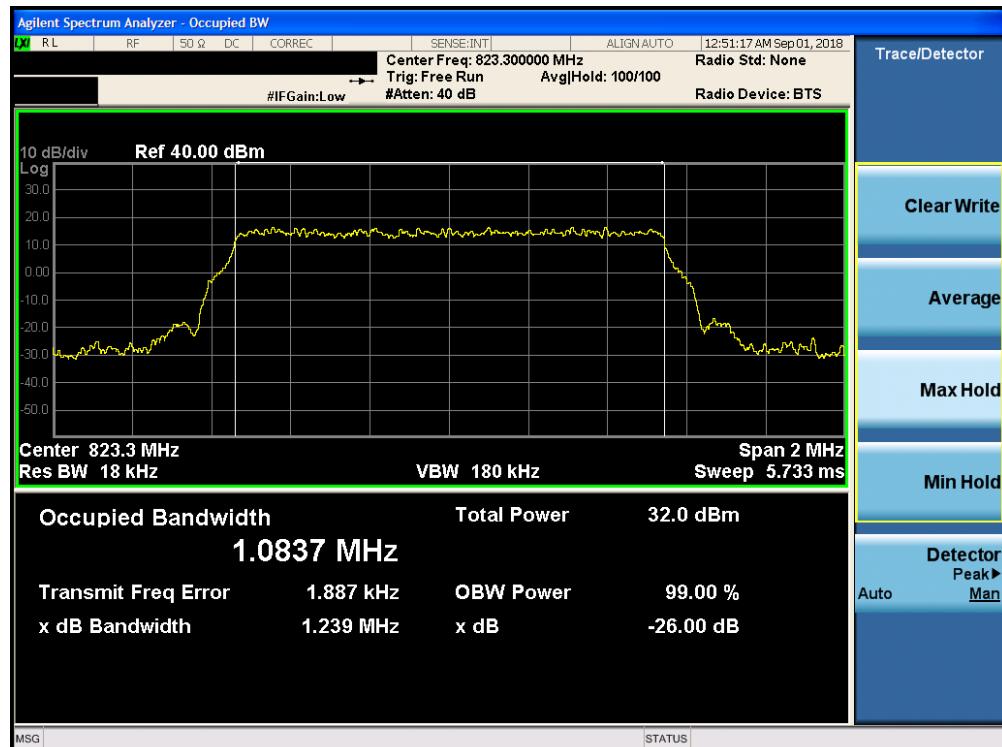


Plot 7-2. Occupied Bandwidth Plot (LTE Band 26, 1.4MHz 16-QAM – RB Size 6– High Channel)

| | | | |
|--|---|----------------------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 13 of 62 |




Plot 7-3. Occupied Bandwidth Plot (LTE Band 26, 1.4MHz 64-QAM – RB Size 6– High Channel)

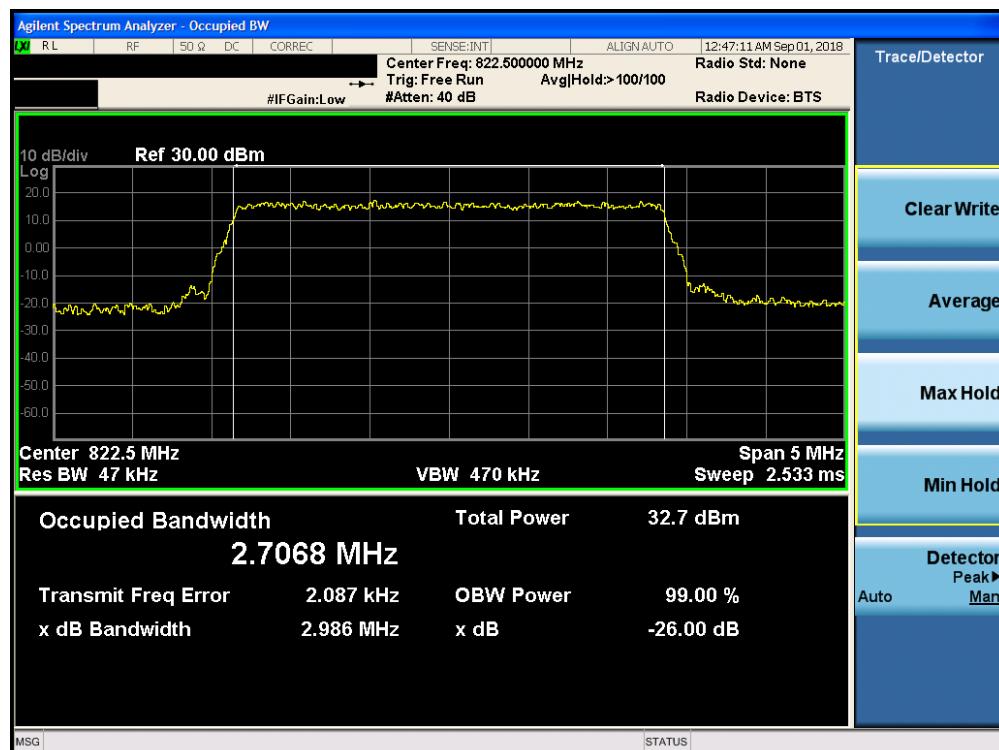


Plot 7-4. Occupied Bandwidth Plot (LTE Band 26, 3MHz QPSK – RB Size 15– High Channel)

| | | | |
|--|--|---------------------------------------|---------------------------------|
| FCC ID: BCGA1895 |  PCTEST [®] ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 14 of 62 |

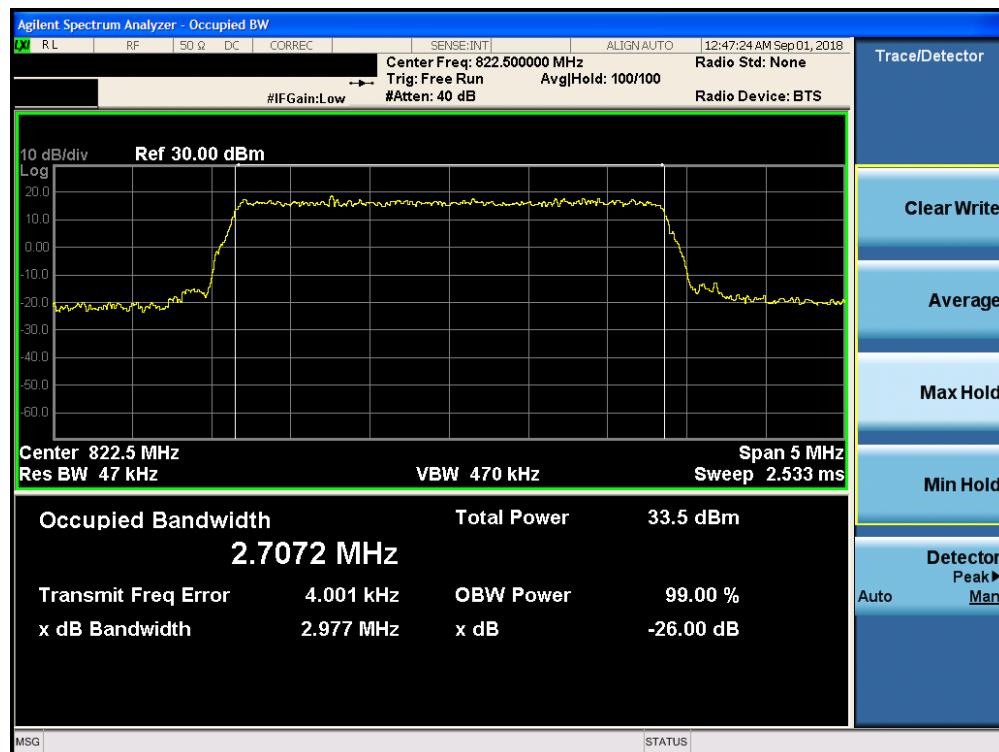

Plot 7-5. Occupied Bandwidth Plot (LTE Band 26, 3MHz 16-QAM – RB Size 15– High Channel)

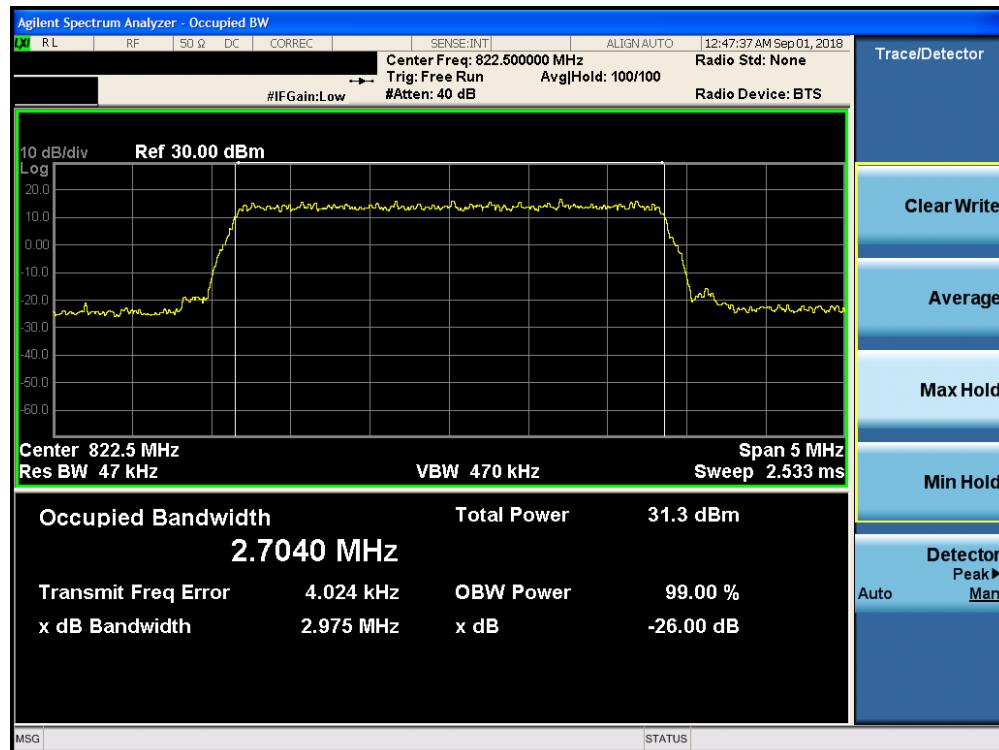

Plot 7-6. Occupied Bandwidth Plot (LTE Band 26, 3MHz 64-QAM – RB Size 15– High Channel)

| | | | | |
|--|---|----------------------------|---------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 15 of 62 | |



Plot 7-7. Occupied Bandwidth Plot (LTE Band 26, 5MHz QPSK – RB Size 25– High Channel)




Plot 7-8. Occupied Bandwidth Plot (LTE Band 26, 5MHz 16-QAM – RB Size 25– High Channel)

| | | | | |
|--|---|----------------------------|---------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 16 of 62 | |




Plot 7-9. Occupied Bandwidth Plot (LTE Band 26, 5MHz 64-QAM – RB Size 25– High Channel)

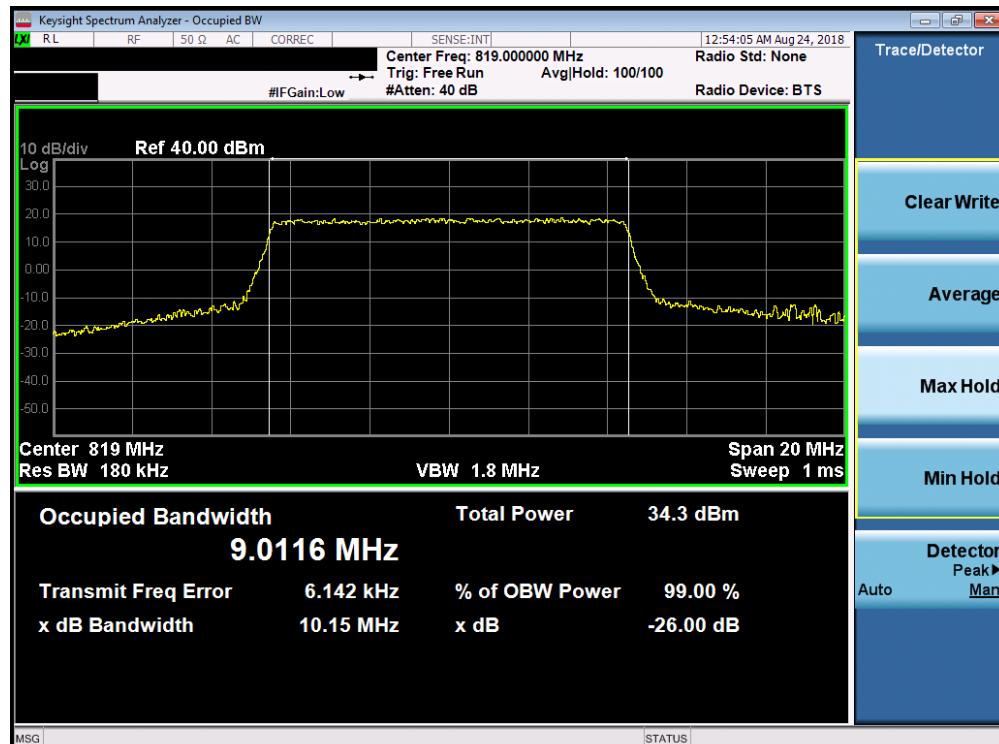


Plot 7-10. Occupied Bandwidth Plot (LTE Band 26, 10MHz QPSK – RB Size 50)

| | | | | |
|--|---|----------------------------|---------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 17 of 62 | |

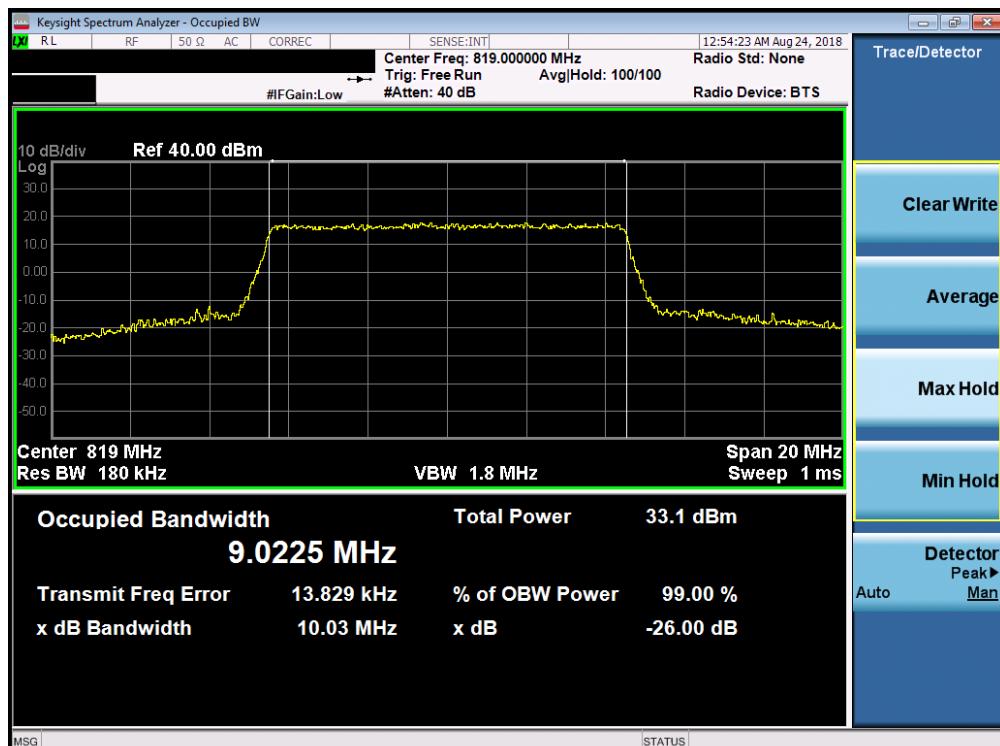

Plot 7-11. Occupied Bandwidth Plot (LTE Band 26, 10MHz 16-QAM – RB Size 50)

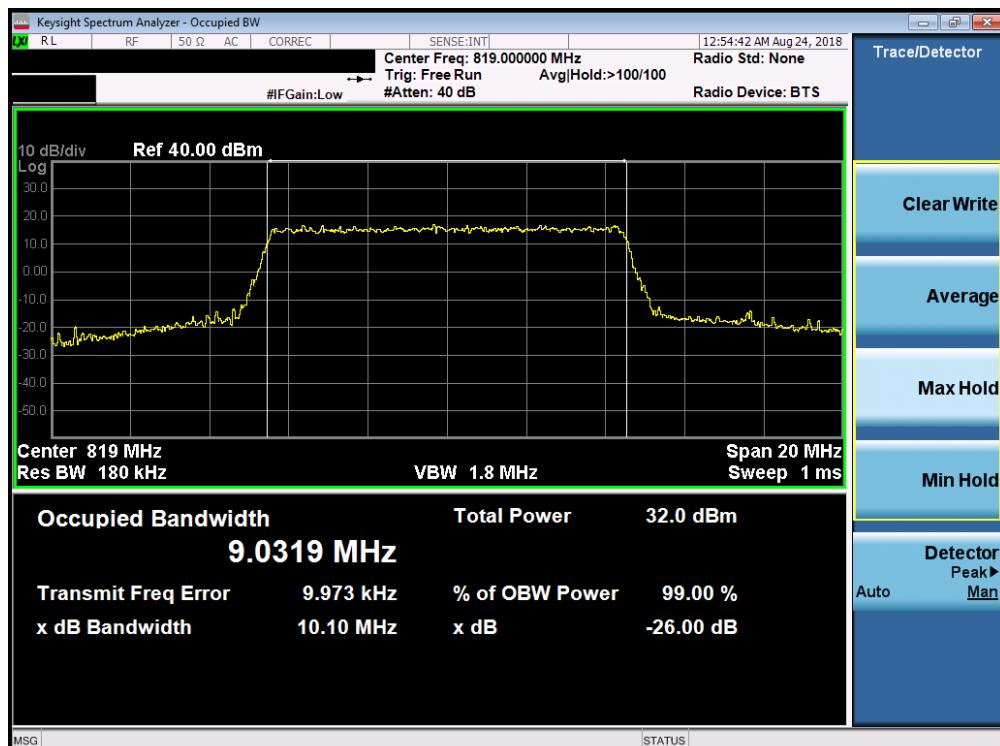

Plot 7-12. Occupied Bandwidth Plot (LTE Band 26, 10MHz 64-QAM – RB Size 50)

| | | | | |
|--|---|----------------------------|--|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | | Page 18 of 62 |

LTE Band 14



Plot 7-13. Occupied Bandwidth Plot (LTE Band 14, 5MHz QPSK – RB Size 25)



Plot 7-14. Occupied Bandwidth Plot (LTE Band 14, 5MHz 16-QAM – RB Size 25)

| | | | | |
|--|---|----------------------------|--|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | | Page 19 of 62 |



Plot 7-15. Occupied Bandwidth Plot (LTE Band 14, 5MHz 64-QAM – RB Size 25)



Plot 7-16. Occupied Bandwidth Plot (LTE Band 14, 10MHz QPSK – RB Size 50)

| | | | | |
|--|--|----------------------------|---------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 20 of 62 | |



Plot 7-17. Occupied Bandwidth Plot (LTE Band 14, 10MHz 16-QAM – RB Size 50)



Plot 7-18. Occupied Bandwidth Plot (LTE Band 14, 10MHz 64-QAM – RB Size 50)

| | | | | |
|--|---|----------------------------|---------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 21 of 62 | |

7.3 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051 §90.691 §90.543

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{\text{Watts}})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. RBW \geq 1MHz
3. VBW \geq 3 x RBW
4. Detector = RMS
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-2. Test Instrument & Measurement Setup

Test Notes

1. Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for Part 90. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
2. All ports were tested and only the worst case data were reported.
3. Refer to Table 2-1 Section 2.3 of this test report for correlation between Antennas and Ports

| | | | |
|--|---|----------------------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 22 of 62 |

LTE Band 26

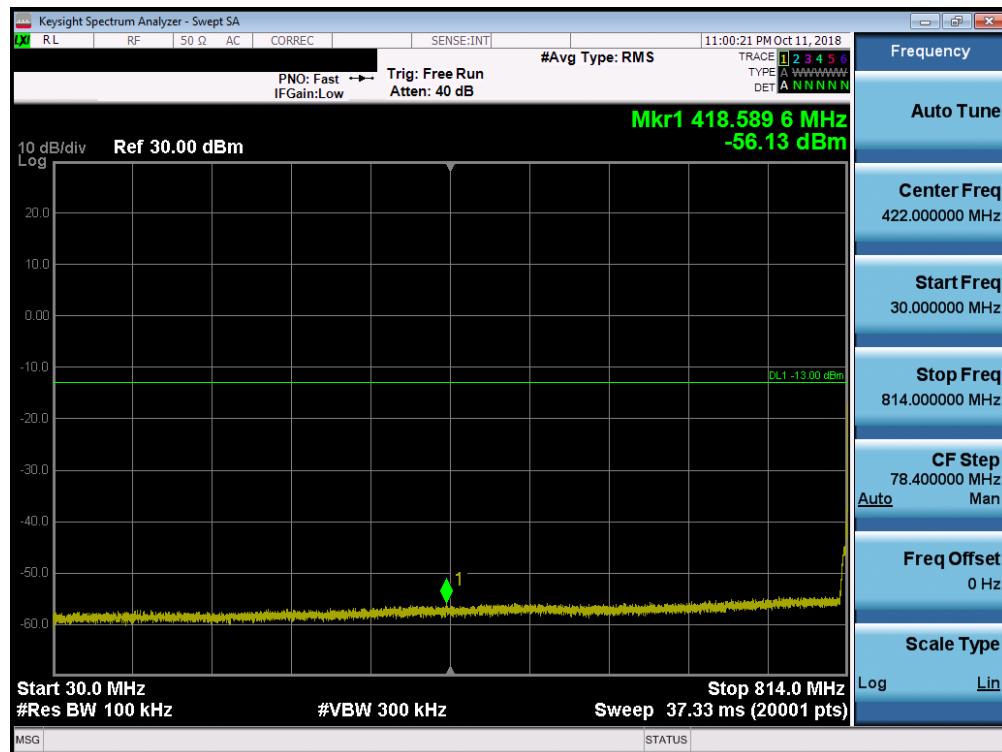


Plot 7-19. Conducted Spurious Plot (LTE Band 26, 5 MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)




Plot 7-20. Conducted Spurious Plot (LTE Band 26, 5 MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

| | | | | |
|--|--|----------------------------|---------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 23 of 62 | |

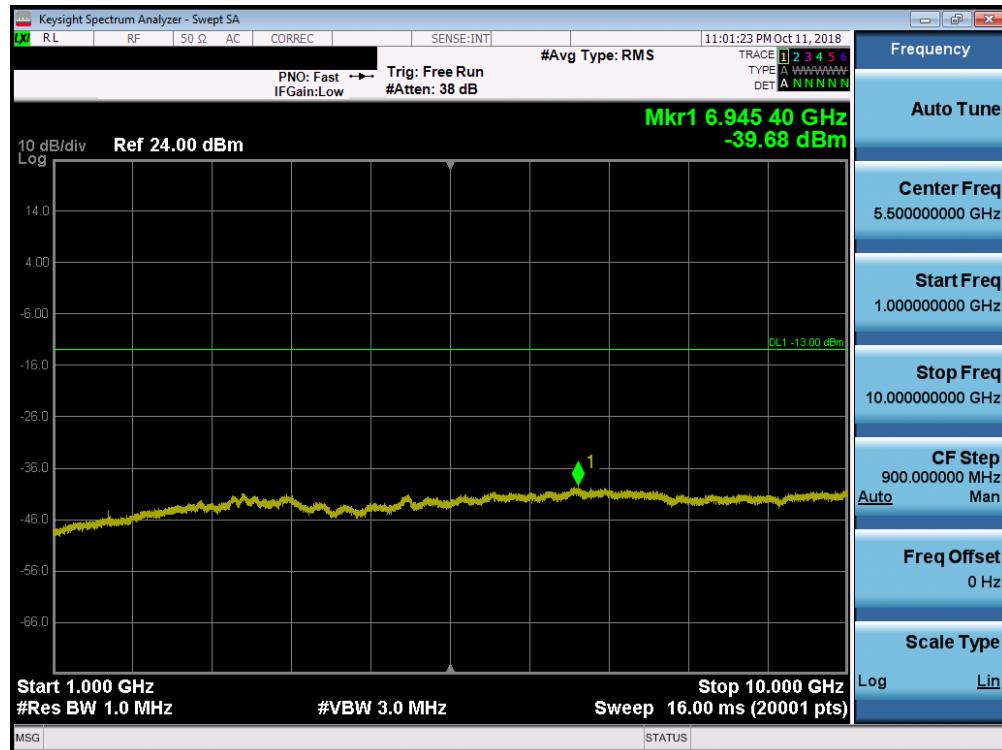


Plot 7-21. Conducted Spurious Plot (LTE Band 26, 5 MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

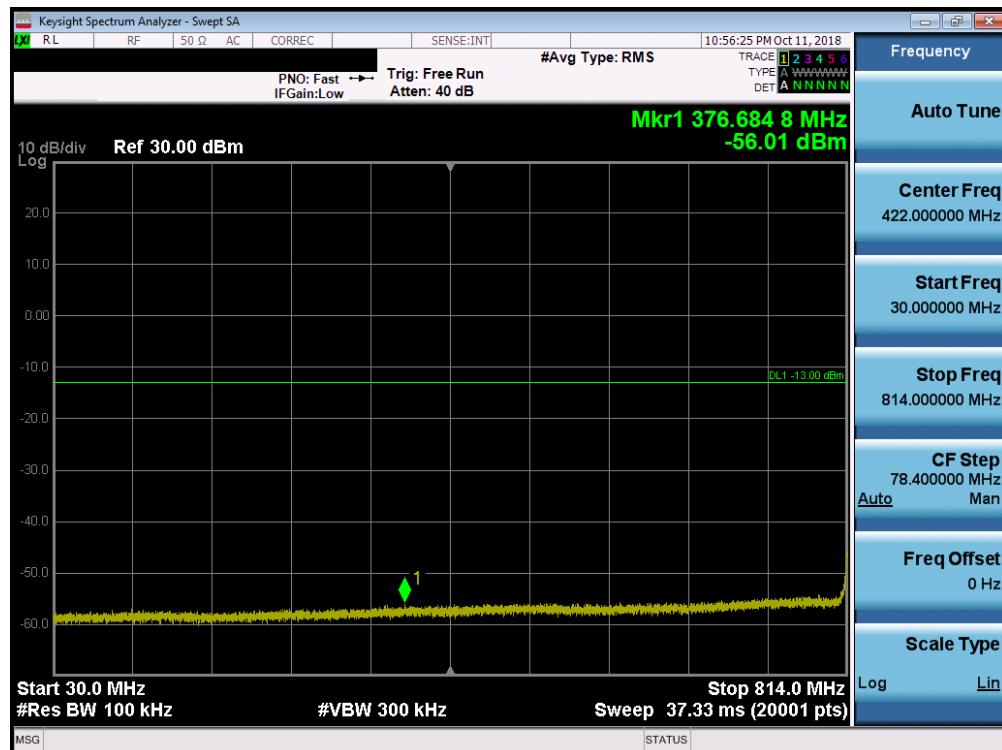

Plot 7-22. Conducted Spurious Plot (LTE Band 26, 5 MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

| | | | | |
|--|---|----------------------------|---------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 24 of 62 | |

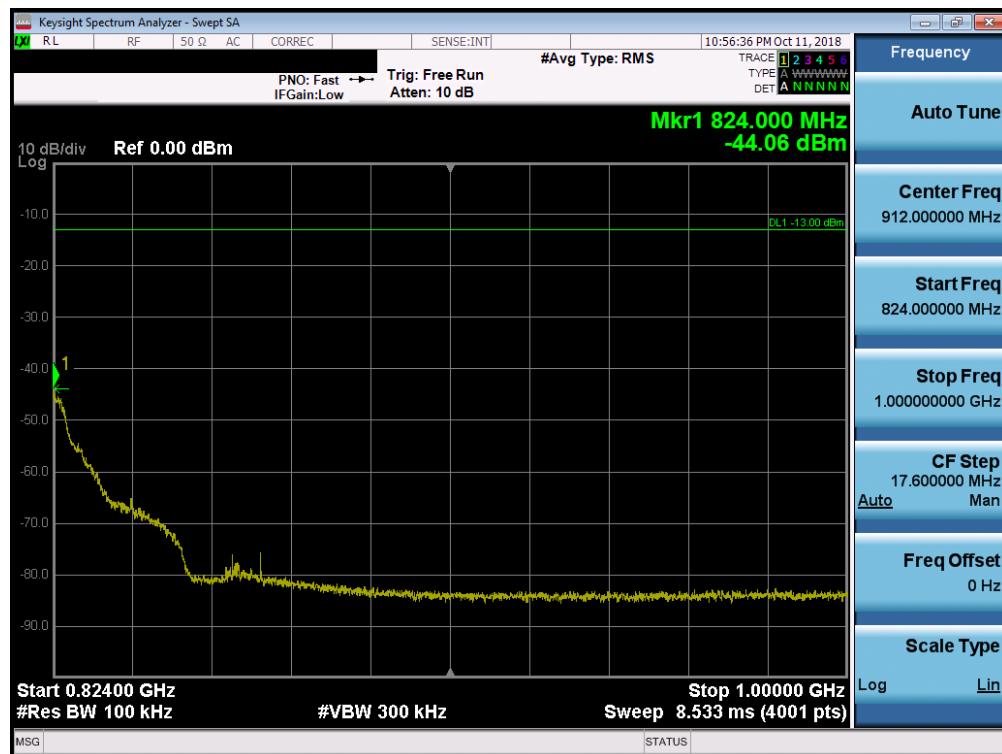


Plot 7-23. Conducted Spurious Plot (LTE Band 26, 5 MHz QPSK – RB Size 1, RB Offset 0 – High Channel)




Plot 7-24. Conducted Spurious Plot (LTE Band 26, 5 MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

| | | | | | |
|--|---|----------------------------|--|---------------------------------------|---------------------------------|
| FCC ID: BCGA1895 | PCTEST ENGINEERING LABORATORY, INC. | | | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | | | Page 25 of 62 |

LTE Band 14

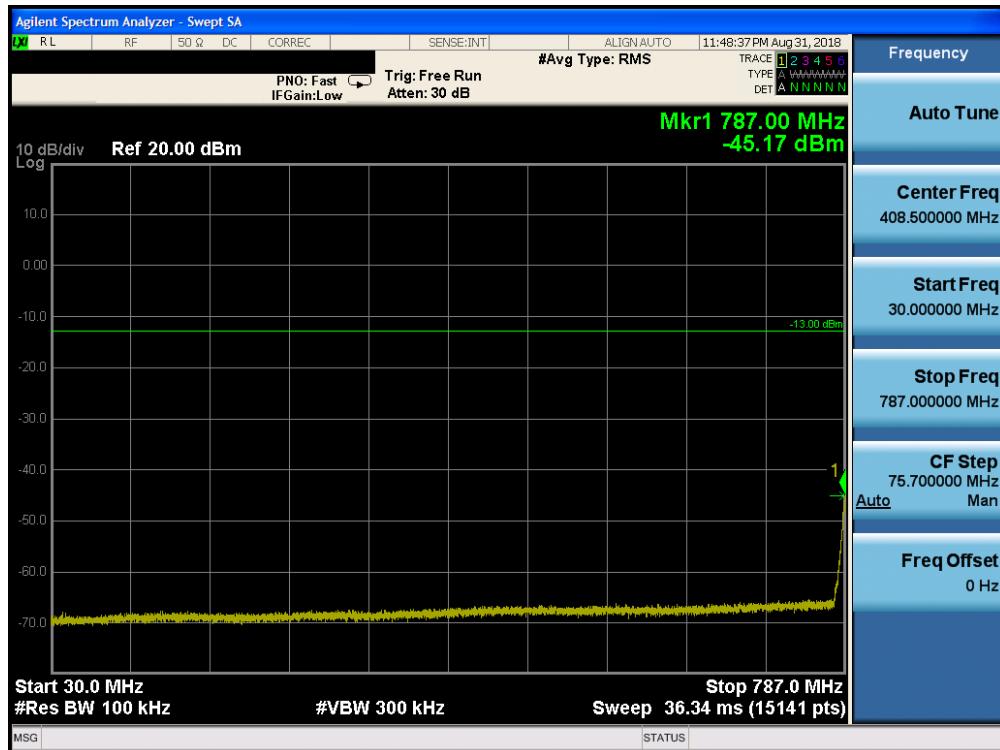


Plot 7-25. Conducted Spurious Plot (LTE Band 14, 5 MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

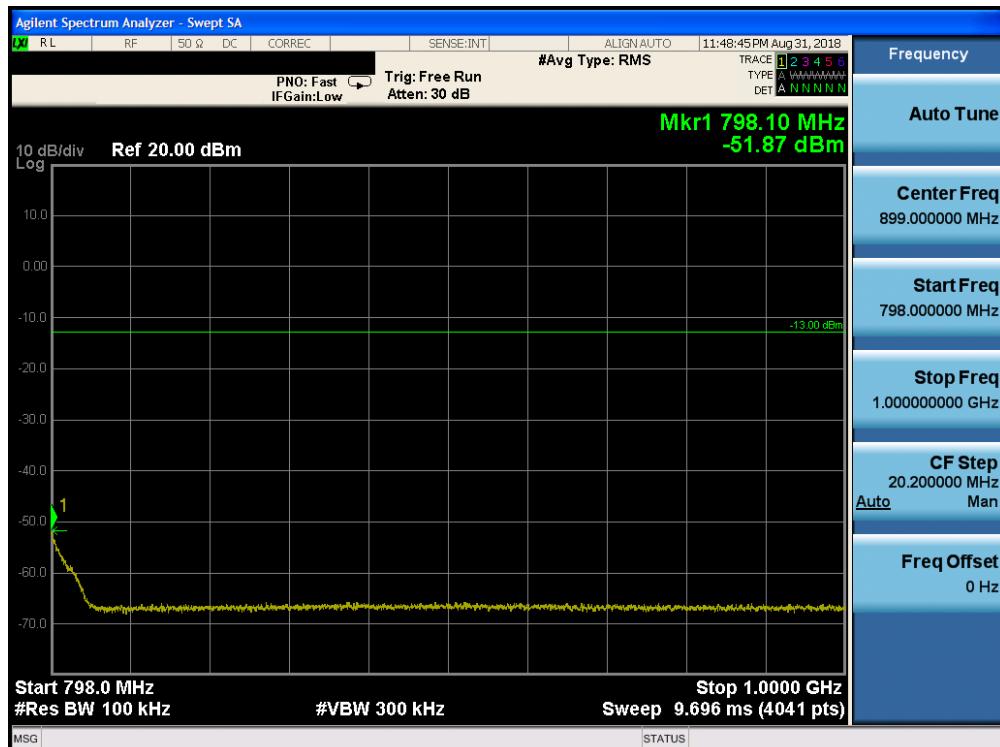


Plot 7-26. Conducted Spurious Plot (LTE Band 14, 5 MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

| | | | | |
|--|---|----------------------------|--|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | | Page 26 of 62 |

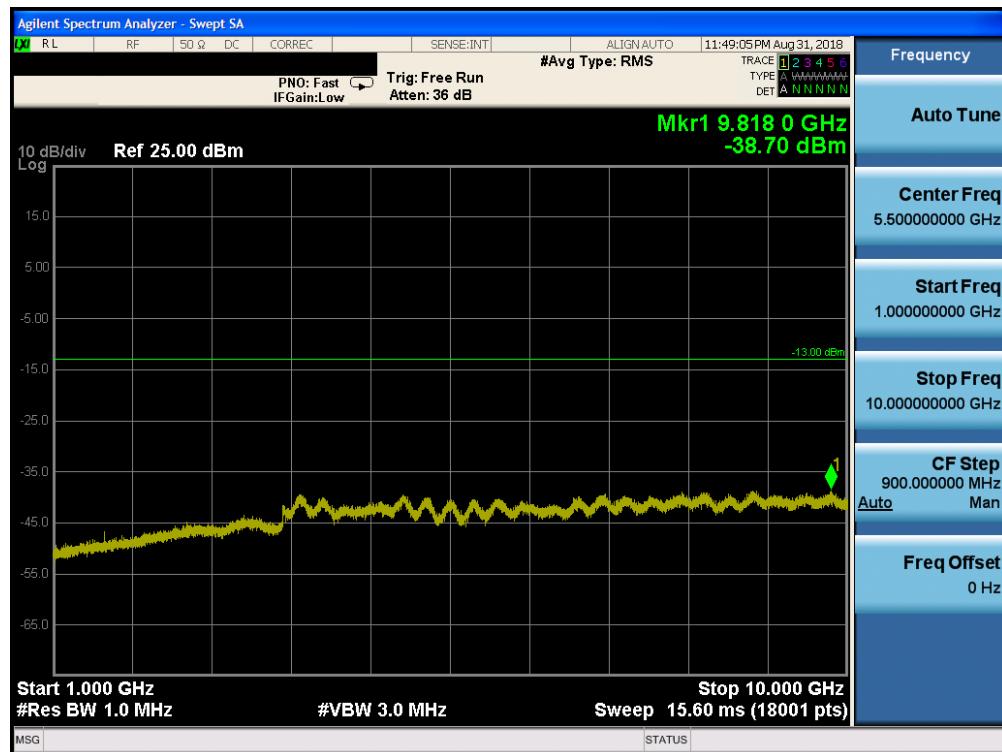


Plot 7-27. Conducted Spurious Plot (LTE Band 14, 5 MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

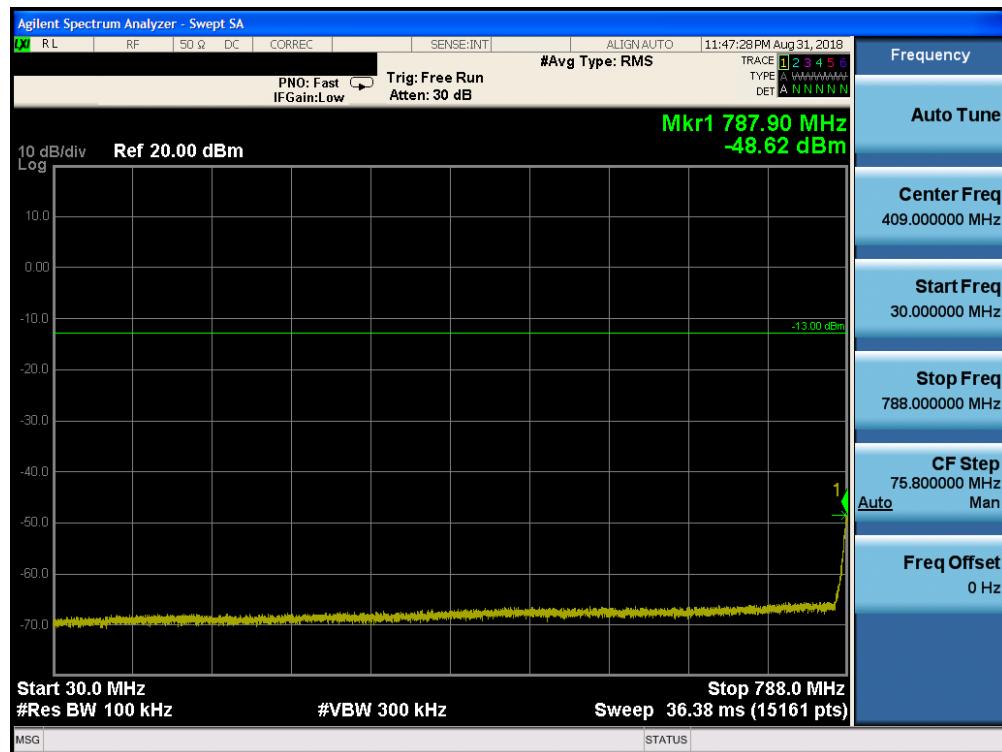


Plot 7-28. Conducted Spurious Plot (LTE Band 14, 5 MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

| | | | |
|--|---------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA1895 | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 27 of 62 |

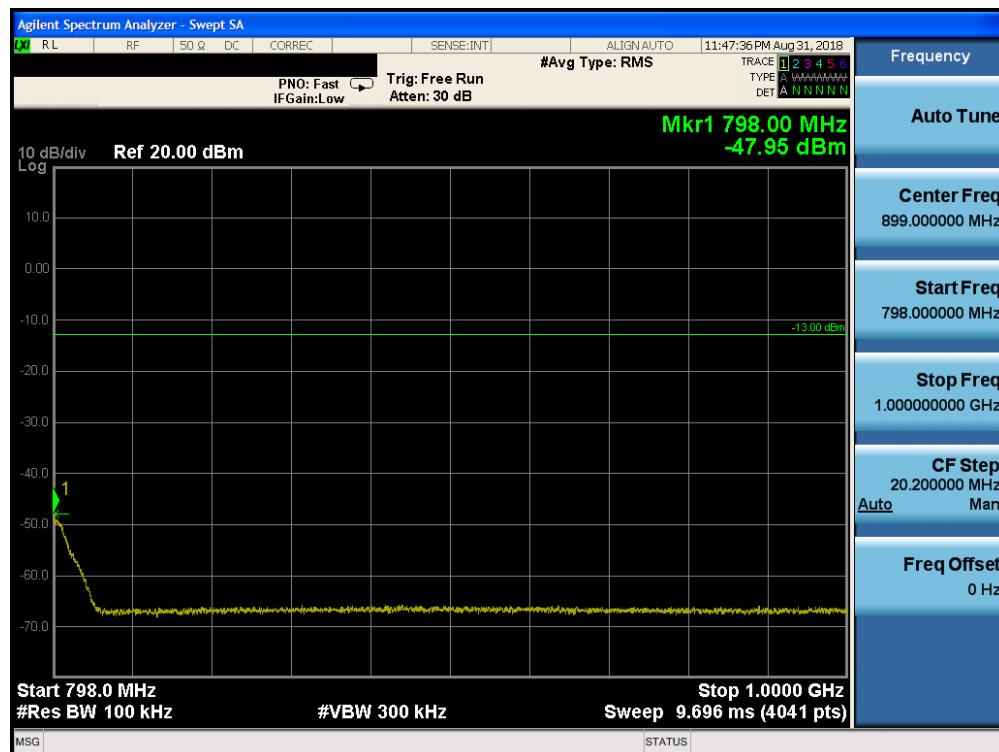

Plot 7-29. Conducted Spurious Plot (LTE Band 14, 5 MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

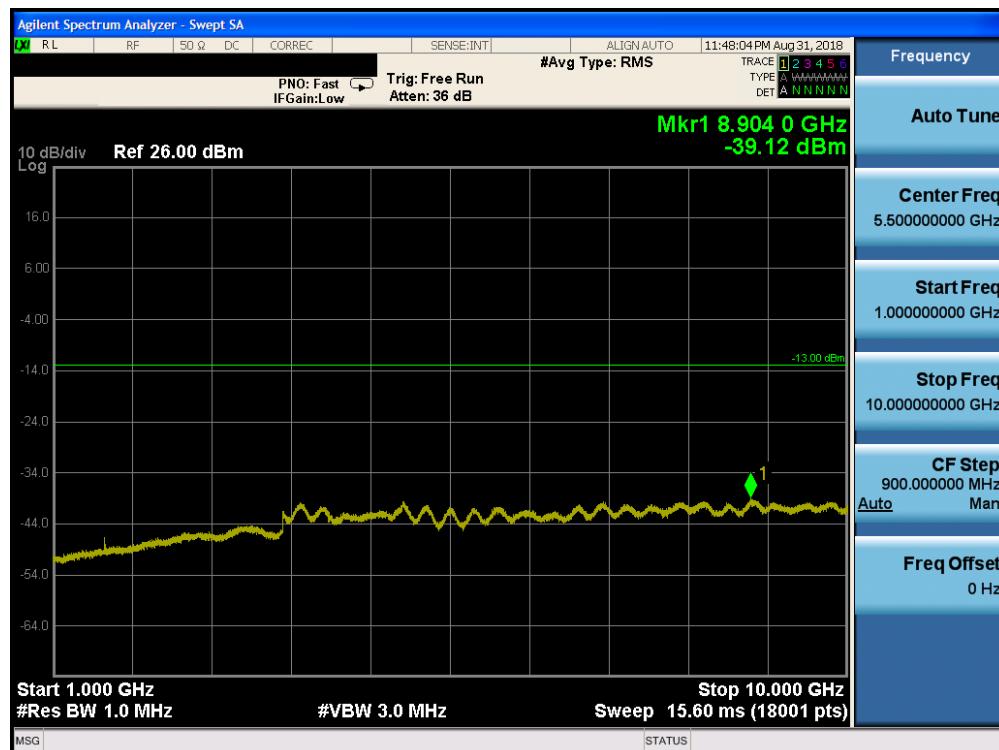


Plot 7-30. Conducted Spurious Plot (LTE Band 14, 5 MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

| | | | | |
|--|---|----------------------------|--|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | | Page 28 of 62 |




Plot 7-31. Conducted Spurious Plot (LTE Band 14, 5 MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

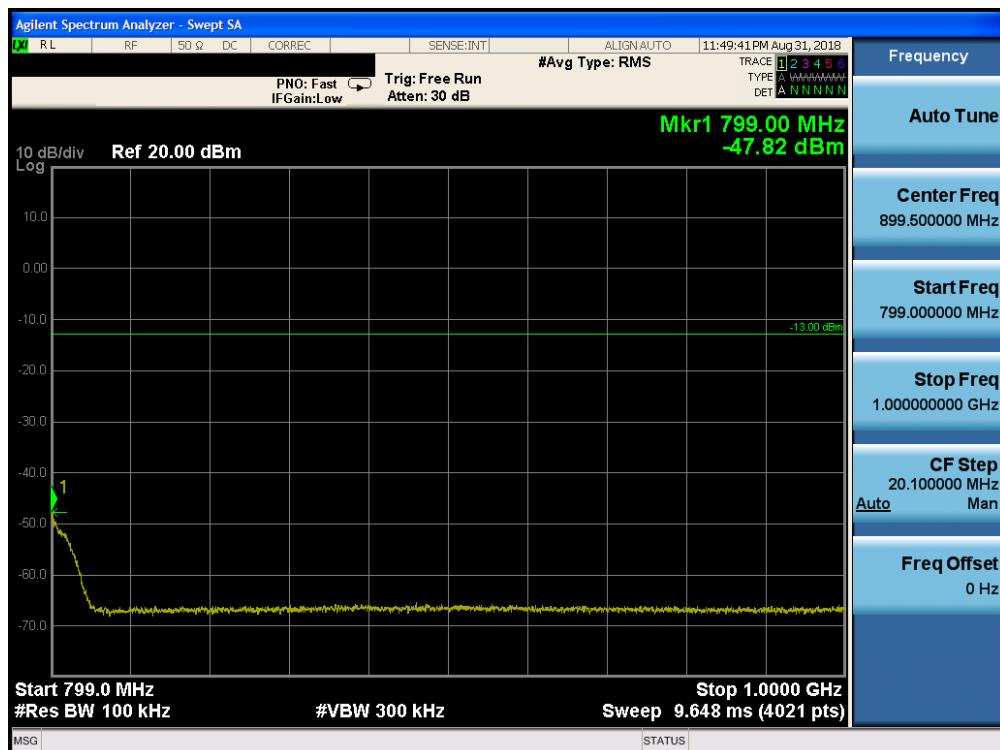

Plot 7-32. Conducted Spurious Plot (LTE Band 14, 5 MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

| | | | |
|--|---|----------------------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 29 of 62 |

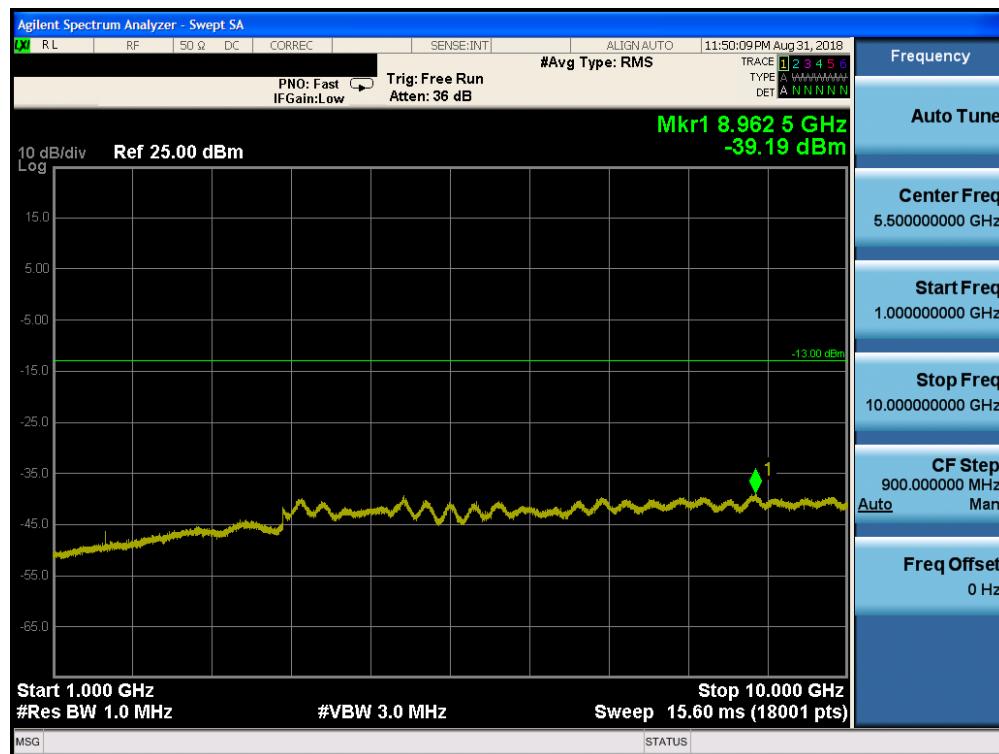

Plot 7-33. Conducted Spurious Plot (LTE Band 14, 5 MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

| | | | | |
|--|---|----------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA1895 | PCTEST ENGINEERING LABORATORY, INC. | | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 30 of 62 | |

7.4 Band Edge Emissions at Antenna Terminal

§2.1051 §90.691 §90.543

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission removed from the EA licensee's frequency block by greater than 37.5 kHz is $43 + 10\log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

The minimum permissible attenuation level of any spurious emission removed from the EA licensee's frequency block by up to and including 37.5 kHz is $50 + 10\log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Span was set large enough so as to capture all out of band emissions near the band edge
2. RBW = 100 kHz
3. VBW = 300 kHz
4. Detector = RMS
5. Trace mode = trace average
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

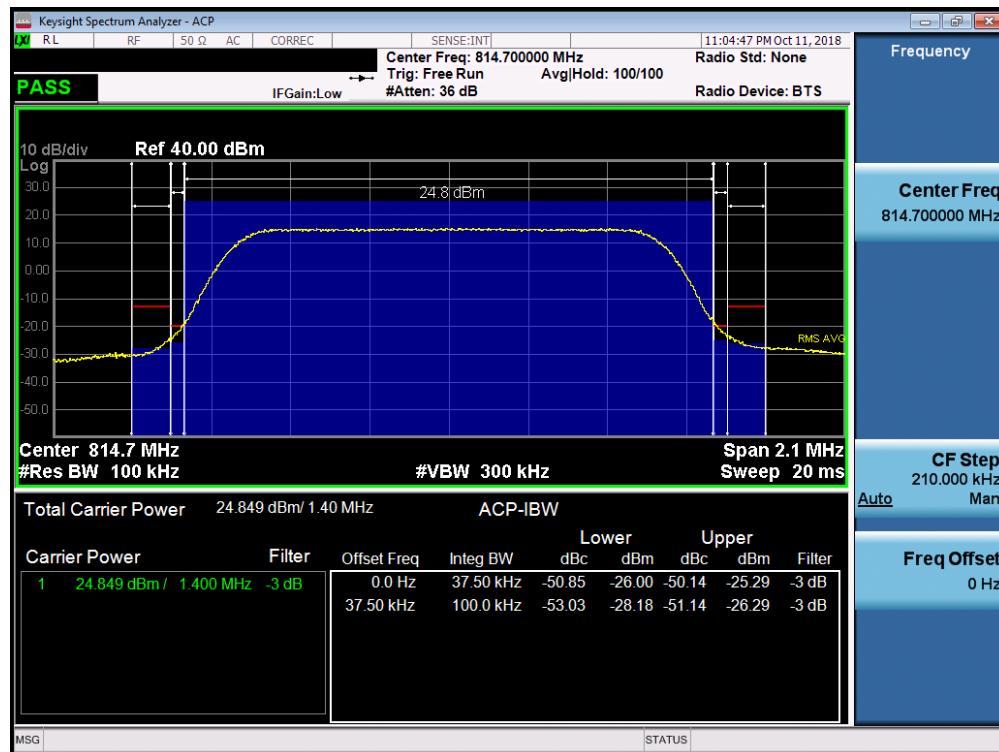


Figure 7-3. Test Instrument & Measurement Setup


Test Notes

1. For channel edge emission, the signal analyzer's "ACP" measurement capability is used.
2. Per Part 90, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
3. All ports were tested and only the worst case data were reported.
4. Refer to Table 2-1 Section 2.3 of this test report for correlation between Antennas and Ports

| | | | |
|--|---|----------------------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 31 of 62 |




Plot 7-34. Channel Edge Plot (LTE Band 26, 1.4MHz QPSK – RB Size 6 – Low Channel)

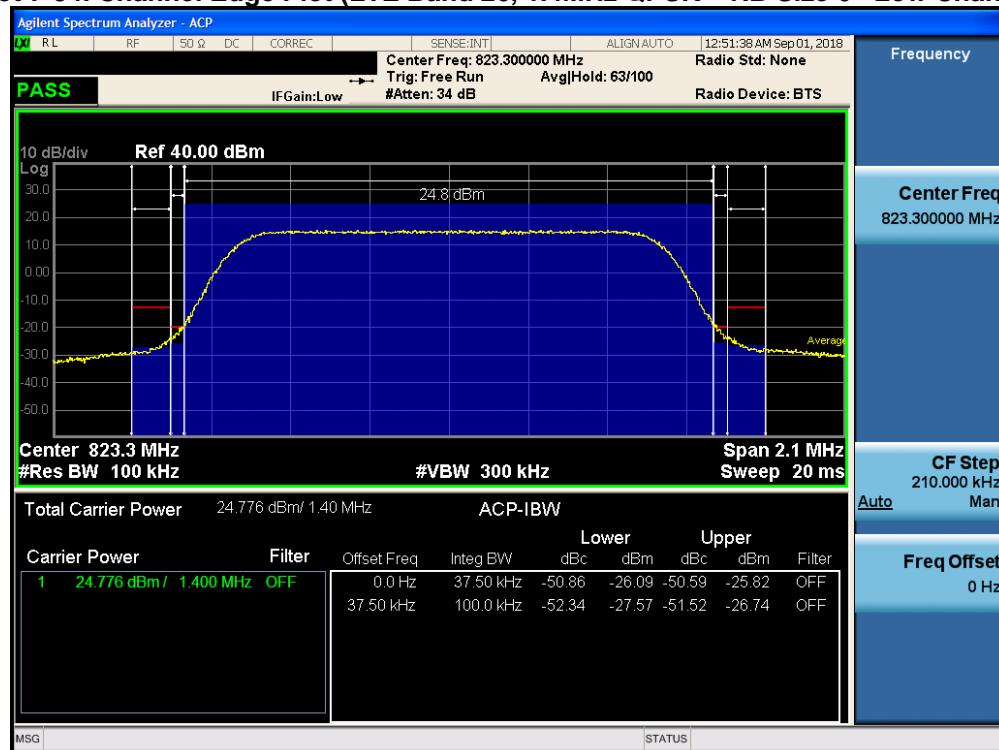


Plot 7-35. Channel Edge Plot (LTE Band 26, 1.4MHz QPSK – RB Size 6 – High Channel)

| | | | | |
|--|-------------------------------------|----------------------------|--|---------------------------------|
| FCC ID: BCGA1895 | MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | | |

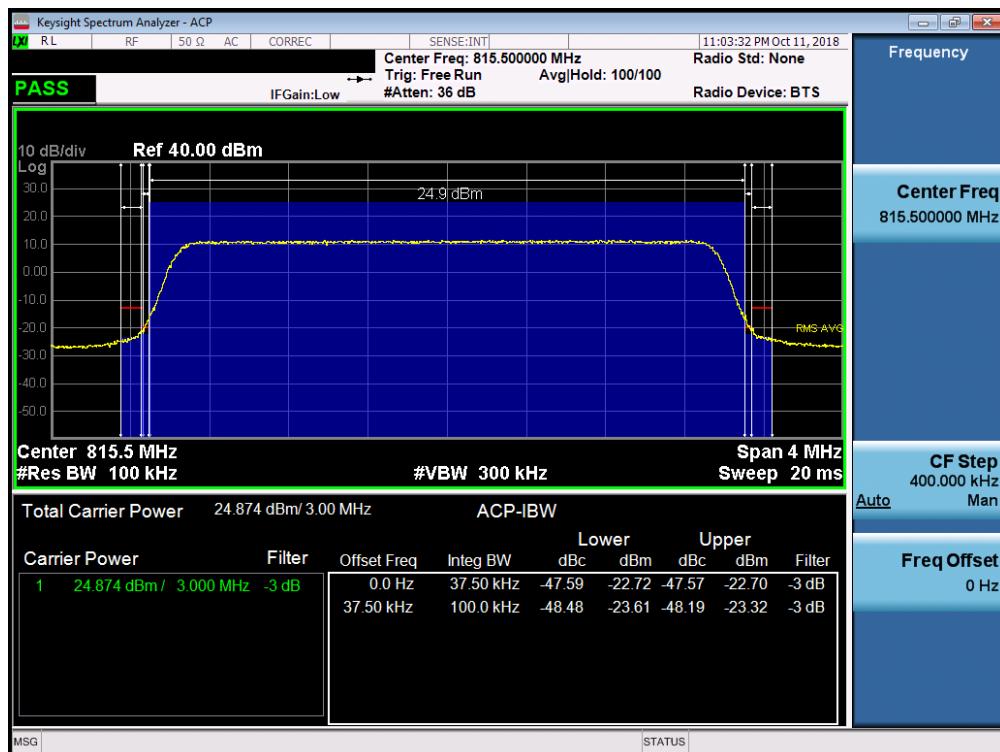


Plot 7-36. Channel Edge Plot (LTE Band 26, 3MHz QPSK – RB Size 15 – Low Channel)

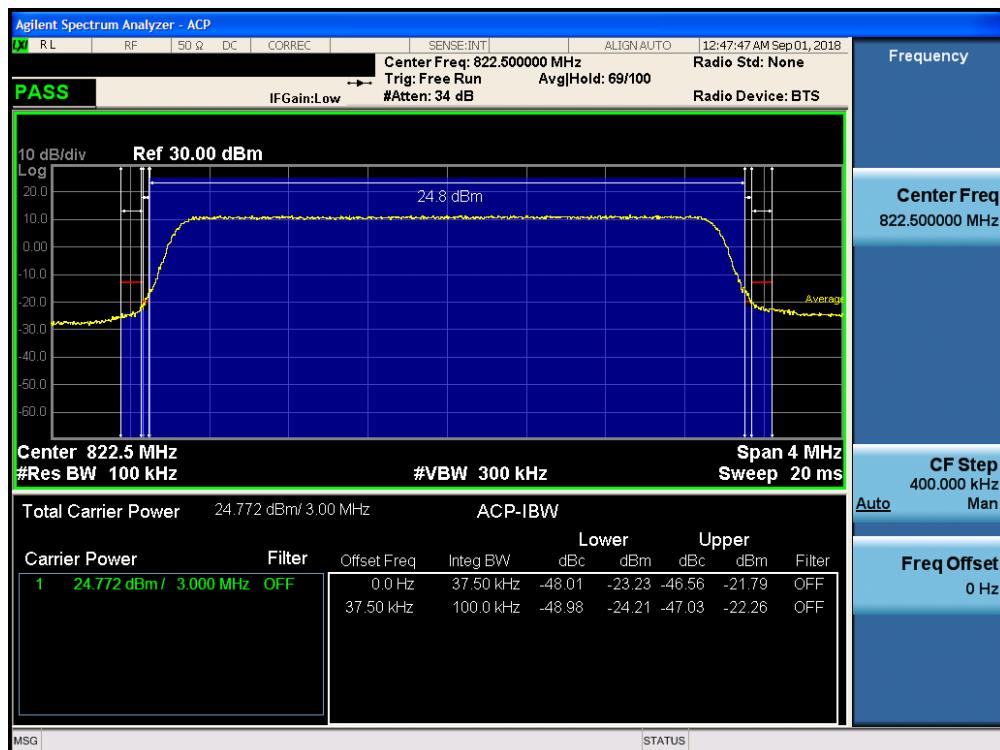


Plot 7-37. Channel Edge Plot (LTE Band 26, 3MHz QPSK – RB Size 15 – High Channel)

| | | | | |
|--|---|----------------------------|---------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 33 of 62 | |

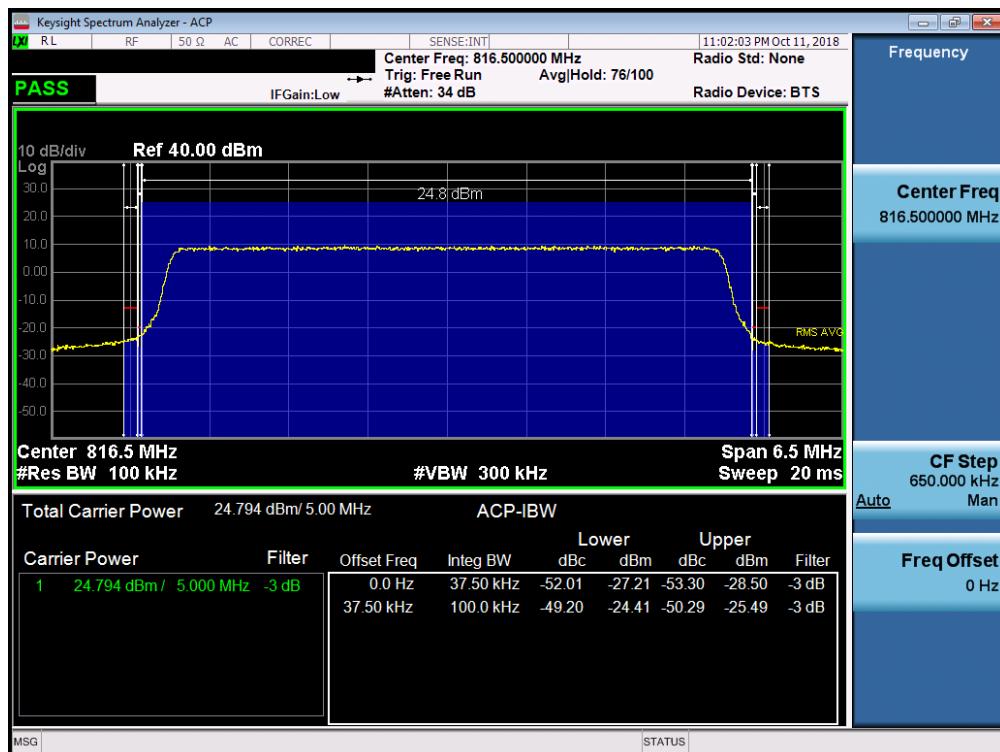


Plot 7-38. Channel Edge Plot (LTE Band 26, 5MHz QPSK – RB Size 25– Low Channel)

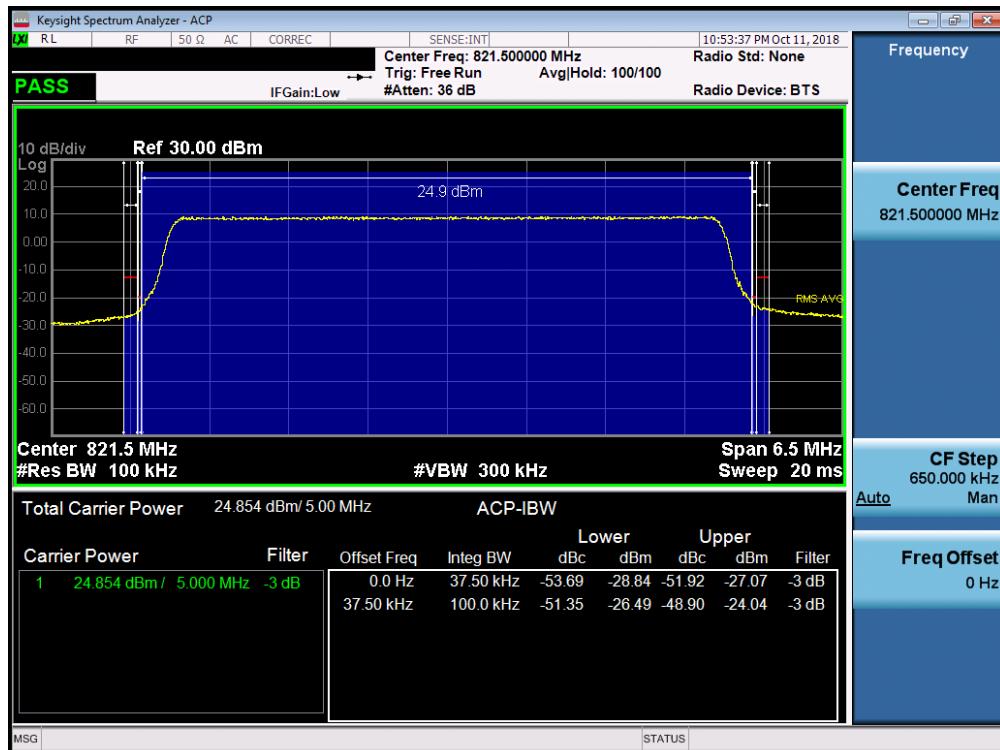


Plot 7-39. Channel Edge Plot (LTE Band 26, 5MHz QPSK – RB Size 25 – High Channel)

| | | | | |
|--|---|----------------------------|---------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 34 of 62 | |

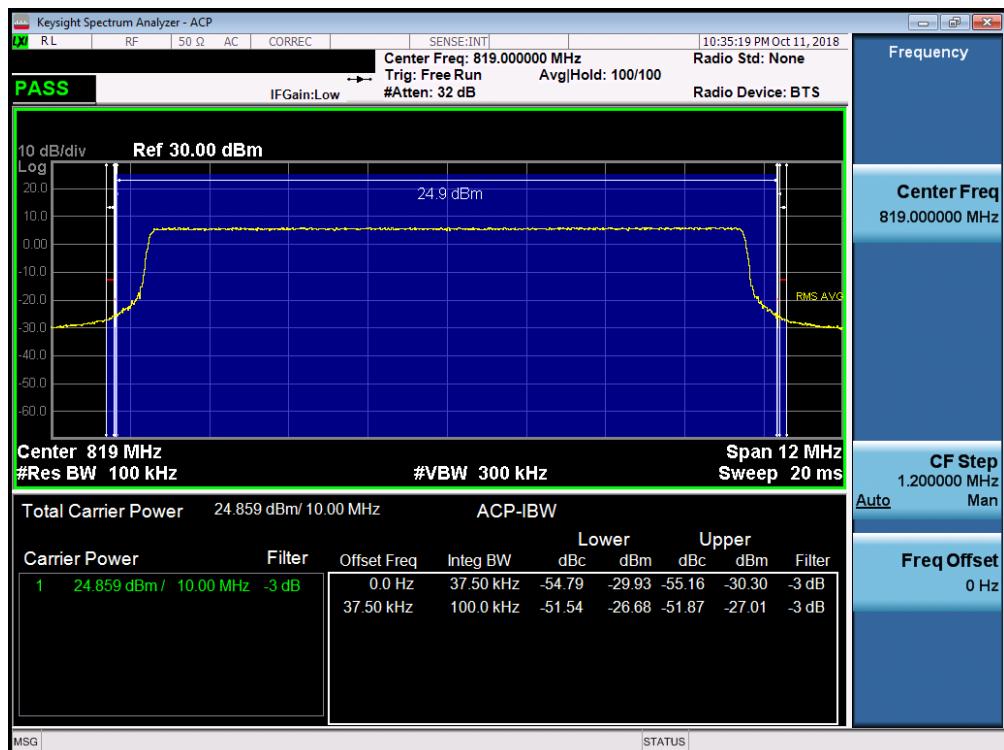


Plot 7-40. Channel Edge Plot (LTE Band 26, 10MHz QPSK – RB Size 50)

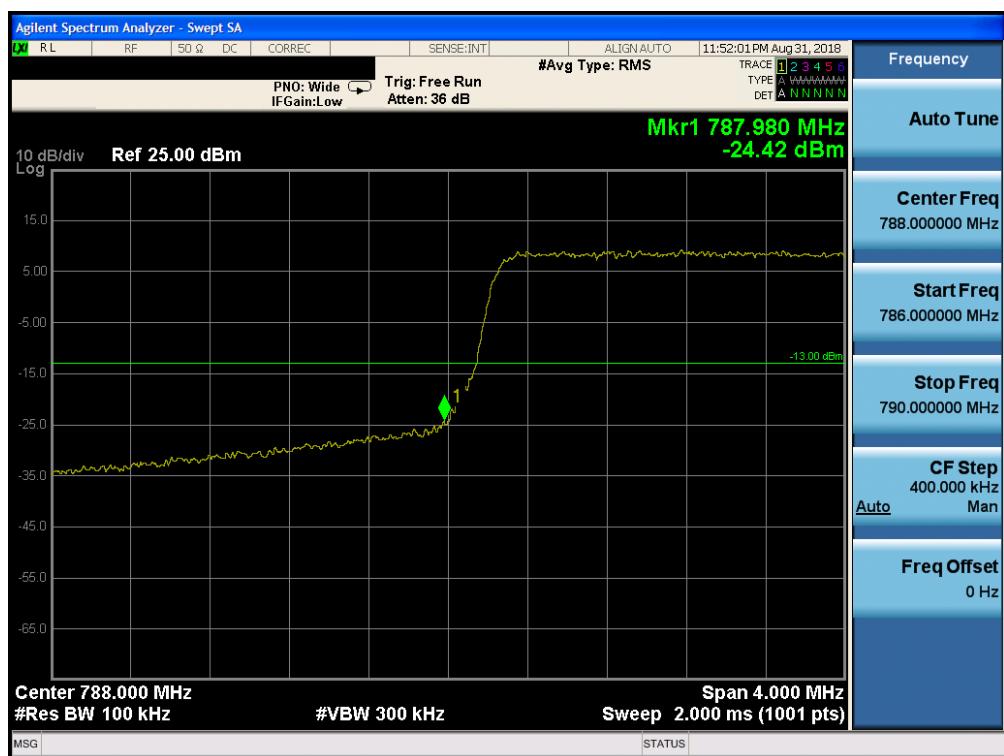

Plot 7-41. Lower Band Edge Plot (LTE Band 14, 5MHz QPSK – RB Size 25)

| | | | | |
|--|---|----------------------------|--|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | | Page 35 of 62 |

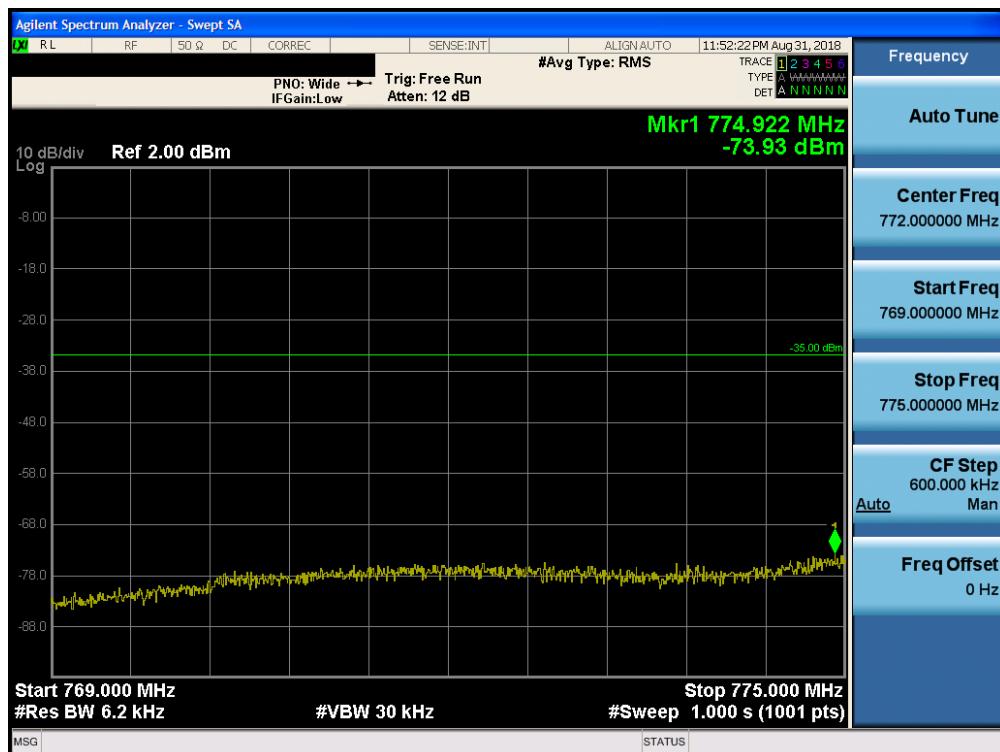

Plot 7-42. Lower Emission Mask Plot (LTE Band 14, 5MHz QPSK – RB Size 25)




Plot 7-43. Upper Band Edge Plot (LTE Band 14, 5MHz QPSK – RB Size 25)

| | | | | |
|--|---|----------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA1895 | PCTEST ENGINEERING LABORATORY, INC. | | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | | Page 36 of 62 |



Plot 7-44. Upper Emission Mask Plot (LTE Band 14, 5MHz QPSK – RB Size 25)

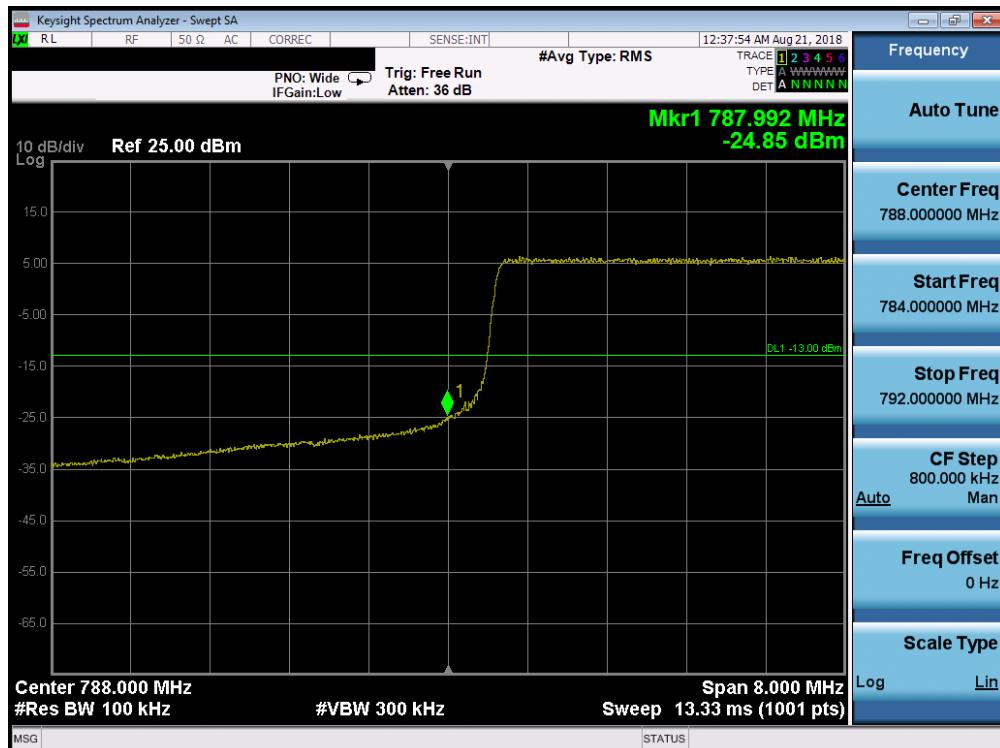

Plot 7-45. Lower Band Edge Plot (LTE Band 14, 10MHz QPSK – RB Size 50)

| | | | | |
|--|---|----------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA1895 | PCTEST ENGINEERING LABORATORY, INC. | | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 37 of 62 | |




Plot 7-46. Lower Emission Mask Plot (LTE Band 14, 10MHz QPSK – RB Size 50)



Plot 7-47. Upper Band Edge Plot (LTE Band 14, 10MHz QPSK – RB Size 50)

| | | | | | |
|--|---|----------------------------|--|---------------------------------------|---------------------------------|
| FCC ID: BCGA1895 | PCTEST ENGINEERING LABORATORY, INC. | | | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | | | |

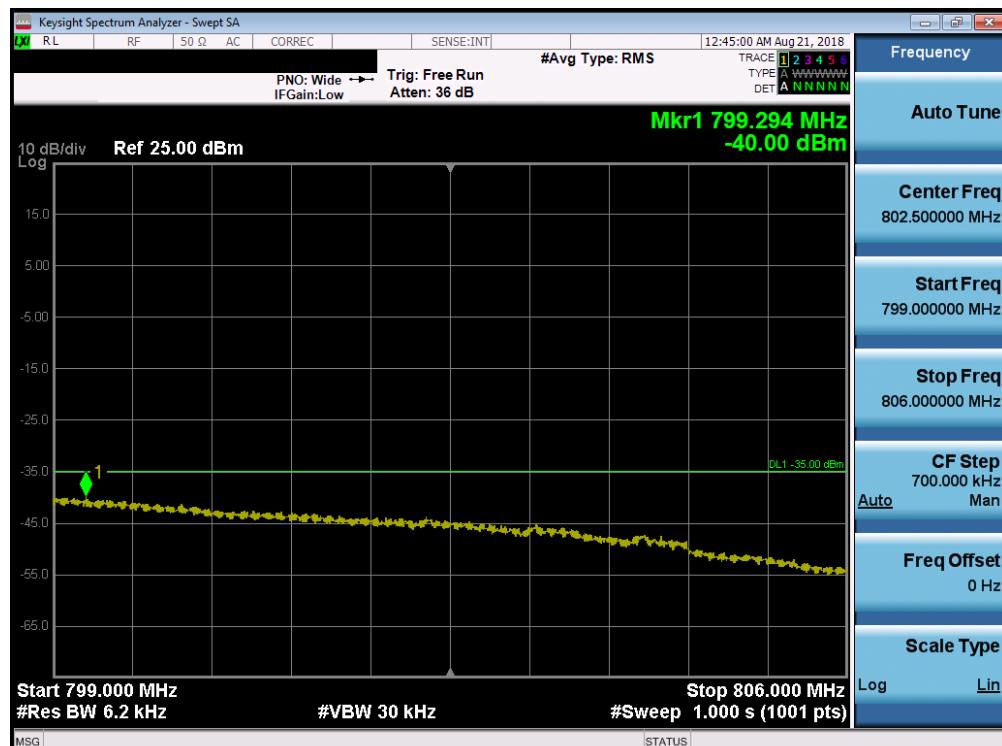

Plot 7-48. Upper Emission Mask Plot (LTE Band 14, 10MHz QPSK – RB Size 50)

| | | | | |
|--|---|----------------------------|--|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | | Page 39 of 62 |

7.5 Conducted Power Output Data

§2.1046 §90.635

Test Overview

Conducted power measurements are performed to measure the average output power of the EUT. The averaging is to be performed only over duration of active transmissions at maximum output power level. The average measurements do not include averaging over periods when the transmitter is quiescent or when operating at reduced power level.

Test Procedures Used

KDB 971168 D01 v03

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Conducted Power Measurement Setup

Test Notes

- 1) The EUT was tested in all possible test configurations. The worst case emissions are reported with the EUT modulations and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) Refer to Table 2-1 Section 2.3 of this test report for correlation between Antennas and Ports

| | | | |
|--|---|----------------------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 40 of 62 |

Port A

| Frequency [MHz] | Channel Bandwidth [MHz] | Mod. | RB Size/Offset | Cond. PWR [dBm] | Cond. PWR [Watts] | Cond. PWR Limit [dBm] | Margin [dB] |
|-----------------|-------------------------|--------|----------------|-----------------|-------------------|-----------------------|-------------|
| 790.50 | 5 | QPSK | 1 / 12 | 25.49 | 0.354 | 50.00 | -24.51 |
| 793.00 | 5 | QPSK | 1 / 0 | 25.35 | 0.343 | 50.00 | -24.65 |
| 795.50 | 5 | QPSK | 1 / 0 | 25.49 | 0.354 | 50.00 | -24.51 |
| 790.50 | 5 | 16-QAM | 1 / 12 | 24.75 | 0.299 | 50.00 | -25.25 |
| 793.00 | 5 | 16-QAM | 1 / 24 | 24.85 | 0.305 | 50.00 | -25.15 |
| 795.50 | 5 | 16-QAM | 1 / 0 | 24.71 | 0.296 | 50.00 | -25.29 |
| 790.50 | 5 | 64-QAM | 1 / 12 | 23.53 | 0.225 | 50.00 | -26.47 |
| 793.00 | 5 | 64-QAM | 1 / 0 | 23.47 | 0.222 | 50.00 | -26.53 |
| 795.50 | 5 | 64-QAM | 1 / 24 | 23.57 | 0.228 | 50.00 | -26.43 |
| 793.00 | 10 | QPSK | 1 / 49 | 25.50 | 0.355 | 50.00 | -24.50 |
| 793.00 | 10 | 16-QAM | 1 / 0 | 24.77 | 0.300 | 50.00 | -25.23 |
| 793.00 | 10 | 64-QAM | 1 / 0 | 23.56 | 0.227 | 50.00 | -26.44 |

Table 7-2. LTE Band 14 Conducted Power Output Data

| | | | | |
|--|---|----------------------------|---------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 41 of 62 | |

| Frequency [MHz] | Channel Bandwidth [MHz] | Mod. | RB Size/Offset | Cond. PWR [dBm] | Cond. PWR [Watts] | Cond. PWR Limit [dBm] | Margin [dB] |
|-----------------|-------------------------|--------|----------------|-----------------|-------------------|-----------------------|-------------|
| 814.70 | 1.4 | QPSK | 1 / 0 | 25.50 | 0.355 | 50.00 | -24.50 |
| 823.30 | 1.4 | QPSK | 1 / 0 | 25.50 | 0.355 | 50.00 | -24.50 |
| 814.70 | 1.4 | 16-QAM | 1 / 2 | 24.84 | 0.305 | 50.00 | -25.16 |
| 823.30 | 1.4 | 16-QAM | 1 / 5 | 24.71 | 0.296 | 50.00 | -25.29 |
| 814.70 | 1.4 | 64-QAM | 1 / 0 | 23.61 | 0.230 | 50.00 | -26.39 |
| 823.30 | 1.4 | 64-QAM | 1 / 0 | 23.80 | 0.240 | 50.00 | -26.20 |
| 815.50 | 3 | QPSK | 1 / 7 | 25.49 | 0.354 | 50.00 | -24.51 |
| 822.50 | 3 | QPSK | 1 / 7 | 25.50 | 0.355 | 50.00 | -24.50 |
| 815.50 | 3 | 16-QAM | 1 / 0 | 24.72 | 0.296 | 50.00 | -25.28 |
| 822.50 | 3 | 16-QAM | 1 / 7 | 24.77 | 0.300 | 50.00 | -25.23 |
| 815.50 | 3 | 64-QAM | 1 / 7 | 23.62 | 0.230 | 50.00 | -26.38 |
| 822.50 | 3 | 64-QAM | 1 / 0 | 23.82 | 0.241 | 50.00 | -26.18 |
| 816.50 | 5 | QPSK | 1 / 0 | 25.47 | 0.352 | 50.00 | -24.53 |
| 821.50 | 5 | QPSK | 1 / 0 | 25.49 | 0.354 | 50.00 | -24.51 |
| 816.50 | 5 | 16-QAM | 1 / 24 | 24.68 | 0.294 | 50.00 | -25.32 |
| 821.50 | 5 | 16-QAM | 1 / 0 | 24.95 | 0.313 | 50.00 | -25.05 |
| 816.50 | 5 | 64-QAM | 1 / 0 | 23.57 | 0.228 | 50.00 | -26.43 |
| 821.50 | 5 | 64-QAM | 1 / 0 | 23.81 | 0.240 | 50.00 | -26.19 |
| 819.00 | 10 | QPSK | 1 / 49 | 25.46 | 0.352 | 50.00 | -24.54 |
| 819.00 | 10 | 16-QAM | 1 / 49 | 24.65 | 0.292 | 50.00 | -25.35 |
| 819.00 | 10 | 64-QAM | 1 / 49 | 23.62 | 0.230 | 50.00 | -26.38 |

Table 7-3. LTE Band 26 Conducted Power Output Data

| | | | | | |
|--|-------------------------------------|----------------------------|--|--|---------------------------------|
| FCC ID: BCGA1895 | MEASUREMENT REPORT (CERTIFICATION) | | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | | | |

Port B

| Frequency [MHz] | Channel Bandwidth [MHz] | Mod. | RB Size/Offset | Cond. PWR [dBm] | Cond. PWR [Watts] | Cond. PWR Limit [dBm] | Margin [dB] |
|-----------------|-------------------------|--------|----------------|-----------------|-------------------|-----------------------|-------------|
| 790.50 | 5 | QPSK | 1 / 12 | 23.69 | 0.234 | 50.00 | -26.31 |
| 793.00 | 5 | QPSK | 1 / 0 | 23.56 | 0.227 | 50.00 | -26.44 |
| 795.50 | 5 | QPSK | 1 / 0 | 23.63 | 0.231 | 50.00 | -26.37 |
| 790.50 | 5 | 16-QAM | 1 / 12 | 22.97 | 0.198 | 50.00 | -27.03 |
| 793.00 | 5 | 16-QAM | 1 / 0 | 22.99 | 0.199 | 50.00 | -27.01 |
| 795.50 | 5 | 16-QAM | 1 / 12 | 22.86 | 0.193 | 50.00 | -27.14 |
| 790.50 | 5 | 64-QAM | 1 / 12 | 21.90 | 0.155 | 50.00 | -28.10 |
| 793.00 | 5 | 64-QAM | 1 / 24 | 21.99 | 0.158 | 50.00 | -28.01 |
| 795.50 | 5 | 64-QAM | 1 / 0 | 21.88 | 0.154 | 50.00 | -28.12 |
| 793.00 | 10 | QPSK | 1 / 0 | 23.67 | 0.233 | 50.00 | -26.33 |
| 793.00 | 10 | 16-QAM | 1 / 0 | 23.00 | 0.200 | 50.00 | -27.00 |
| 793.00 | 10 | 64-QAM | 1 / 0 | 21.92 | 0.156 | 50.00 | -28.08 |

Table 7-4. LTE Band 14 Conducted Power Output Data

| | | | | |
|--|---|----------------------------|---------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 43 of 62 | |

| Frequency [MHz] | Channel Bandwidth [MHz] | Mod. | RB Size/Offset | Cond. PWR [dBm] | Cond. PWR [Watts] | Cond. PWR Limit [dBm] | Margin [dB] |
|-----------------|-------------------------|--------|----------------|-----------------|-------------------|-----------------------|-------------|
| 814.70 | 1.4 | QPSK | 1 / 5 | 23.62 | 0.230 | 50.00 | -26.38 |
| 823.30 | 1.4 | QPSK | 1 / 0 | 23.72 | 0.236 | 50.00 | -26.28 |
| 814.70 | 1.4 | 16-QAM | 1 / 0 | 22.93 | 0.196 | 50.00 | -27.07 |
| 823.30 | 1.4 | 16-QAM | 1 / 2 | 22.97 | 0.198 | 50.00 | -27.03 |
| 814.70 | 1.4 | 64-QAM | 1 / 0 | 22.04 | 0.160 | 50.00 | -27.96 |
| 823.30 | 1.4 | 64-QAM | 1 / 5 | 22.15 | 0.164 | 50.00 | -27.85 |
| 815.50 | 3 | QPSK | 1 / 0 | 23.65 | 0.232 | 50.00 | -26.35 |
| 822.50 | 3 | QPSK | 1 / 7 | 23.73 | 0.236 | 50.00 | -26.27 |
| 815.50 | 3 | 16-QAM | 1 / 14 | 22.97 | 0.198 | 50.00 | -27.03 |
| 822.50 | 3 | 16-QAM | 1 / 0 | 22.84 | 0.192 | 50.00 | -27.16 |
| 815.50 | 3 | 64-QAM | 1 / 7 | 21.95 | 0.157 | 50.00 | -28.05 |
| 822.50 | 3 | 64-QAM | 1 / 7 | 22.09 | 0.162 | 50.00 | -27.91 |
| 816.50 | 5 | QPSK | 1 / 0 | 23.75 | 0.237 | 50.00 | -26.25 |
| 821.50 | 5 | QPSK | 1 / 12 | 23.74 | 0.237 | 50.00 | -26.26 |
| 816.50 | 5 | 16-QAM | 1 / 0 | 23.19 | 0.208 | 50.00 | -26.81 |
| 821.50 | 5 | 16-QAM | 1 / 0 | 22.98 | 0.199 | 50.00 | -27.02 |
| 816.50 | 5 | 64-QAM | 1 / 0 | 21.91 | 0.155 | 50.00 | -28.09 |
| 821.50 | 5 | 64-QAM | 1 / 0 | 22.16 | 0.164 | 50.00 | -27.84 |
| 819.00 | 10 | QPSK | 1 / 49 | 23.74 | 0.237 | 50.00 | -26.26 |
| 819.00 | 10 | 16-QAM | 1 / 49 | 23.03 | 0.201 | 50.00 | -26.97 |
| 819.00 | 10 | 64-QAM | 1 / 0 | 21.95 | 0.157 | 50.00 | -28.05 |

Table 7-5. LTE Band 26 Conducted Power Output Data

NOTES:

1. For LTE mode, the device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1 RB.
2. This unit was tested with its standard battery.

| | | | | |
|--|-------------------------------------|----------------------------|---------------|---------------------------------|
| FCC ID: BCGA1895 | MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 44 of 62 | |

7.6 Radiated Power (ERP)0

\$90.542

Test Overview

Effective Radiated Power (ERP) is specified when the operating frequency is less than or equal to 1 GHz and Equivalent Isotropic Radiated Power (EIRP) is specified when the operating frequency is greater than 1 GHz. Both are determined by adding the transmit antenna gain to the conducted RF output power with the primary difference between the two being that when determining the ERP, the transmit antenna gain is referenced to a dipole antenna (i.e., dBd) whereas when determining the EIRP, the transmit antenna gain is referenced to an isotropic antenna (dBi).

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.6

Test Settings

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured is:

$$\text{ERP/EIRP} = \text{PMes} - \text{LC} + \text{GT}$$

where:

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMes, typically dBW or dBm);

PMes = measured transmitter output power or PSD, in dBm or dBW;

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-5. ERP/EIRP Measurement Setup

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.

| | | | |
|--|---|----------------------------|---------------------------------|
| FCC ID: BCGA1895 | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 45 of 62 |

Port A

| Frequency [MHz] | Channel Bandwidth [MHz] | Mod. | RB Size/Offset | Conducted Power [dBm] | Ant. Gain [dBi] | ERP [dBm] | ERP [Watts] | ERP Limit [dBm] | Margin [dB] |
|-----------------|-------------------------|--------|----------------|-----------------------|-----------------|--------------|--------------|-----------------|-------------|
| 790.50 | 5 | QPSK | 1 / 12 | 25.49 | -3.70 | 19.64 | 0.092 | 34.77 | -15.13 |
| 793.00 | 5 | QPSK | 1 / 0 | 25.35 | -3.70 | 19.50 | 0.089 | 34.77 | -15.27 |
| 795.50 | 5 | QPSK | 1 / 0 | 25.49 | -3.70 | 19.64 | 0.092 | 34.77 | -15.14 |
| 793.00 | 5 | 16-QAM | 1 / 24 | 24.85 | -3.70 | 19.00 | 0.079 | 34.77 | -15.78 |
| 795.50 | 5 | 64-QAM | 1 / 24 | 23.57 | -3.70 | 17.72 | 0.059 | 34.77 | -17.05 |
| 793.00 | 10 | QPSK | 1 / 49 | 25.50 | -3.70 | 19.65 | 0.092 | 34.77 | -15.12 |
| 793.00 | 10 | 16-QAM | 1 / 0 | 24.77 | -3.70 | 18.92 | 0.078 | 34.77 | -15.85 |
| 793.00 | 10 | 64-QAM | 1 / 0 | 23.56 | -3.70 | 17.71 | 0.059 | 34.77 | -17.06 |

Table 7-6. ERP Data (Band 14)
Port B

| Frequency [MHz] | Channel Bandwidth [MHz] | Mod. | RB Size/Offset | Conducted Power [dBm] | Ant. Gain [dBi] | ERP [dBm] | ERP [Watts] | ERP Limit [dBm] | Margin [dB] |
|-----------------|-------------------------|--------|----------------|-----------------------|-----------------|--------------|--------------|-----------------|-------------|
| 790.50 | 5 | QPSK | 1 / 12 | 23.69 | -4.10 | 17.44 | 0.055 | 34.77 | -17.33 |
| 793.00 | 5 | QPSK | 1 / 0 | 23.56 | -4.10 | 17.31 | 0.054 | 34.77 | -17.46 |
| 795.50 | 5 | QPSK | 1 / 0 | 23.63 | -4.10 | 17.38 | 0.055 | 34.77 | -17.39 |
| 793.00 | 5 | 16-QAM | 1 / 0 | 22.99 | -4.10 | 16.74 | 0.047 | 34.77 | -18.03 |
| 793.00 | 5 | 64-QAM | 1 / 24 | 21.99 | -4.10 | 15.74 | 0.037 | 34.77 | -19.03 |
| 793.00 | 10 | QPSK | 1 / 0 | 23.67 | -4.10 | 17.42 | 0.055 | 34.77 | -17.35 |
| 793.00 | 10 | 16-QAM | 1 / 0 | 23.00 | -4.10 | 16.75 | 0.047 | 34.77 | -18.02 |
| 793.00 | 10 | 64-QAM | 1 / 0 | 21.92 | -4.10 | 15.67 | 0.037 | 34.77 | -19.10 |

Table 7-7. ERP Data (Band 14)

| | | | | | | |
|--|--|---------------------------------------|--|--|--|---------------------------------|
| FCC ID: BCGA1895 |  PCTEST® ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT (CERTIFICATION) | | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | | | | |

7.7 Radiated Spurious Emissions Measurements

§2.1053 §90.691 §90.543

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

| | | | |
|--|---|----------------------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 47 of 62 |

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

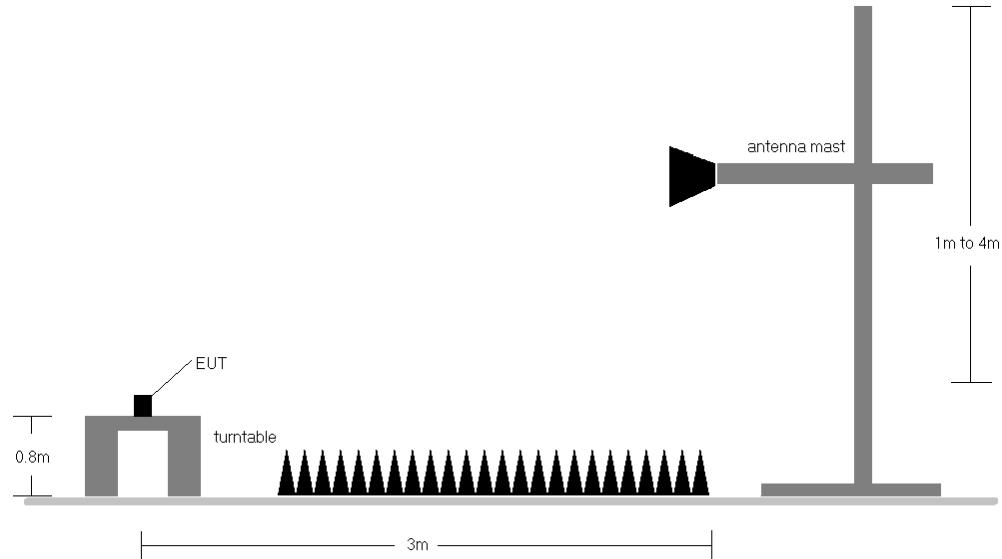



Figure 7-6. Test Instrument & Measurement Setup

Test Notes

1. For LTE mode, the device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1 RB.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
4. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
5. Per 90.543(f), emissions in the 1559 – 1610MHz band are subject to a limit of -40dBm/MHz for wideband signals. These emission measurements are shown in this section below.

| | | | |
|--|--|---------------------------------------|---------------------------------|
| FCC ID: BCGA1895 |  PCTEST® ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 48 of 62 |

7.7.1 ANT 3 (Port A) Radiated Spurious Emissions Measurements

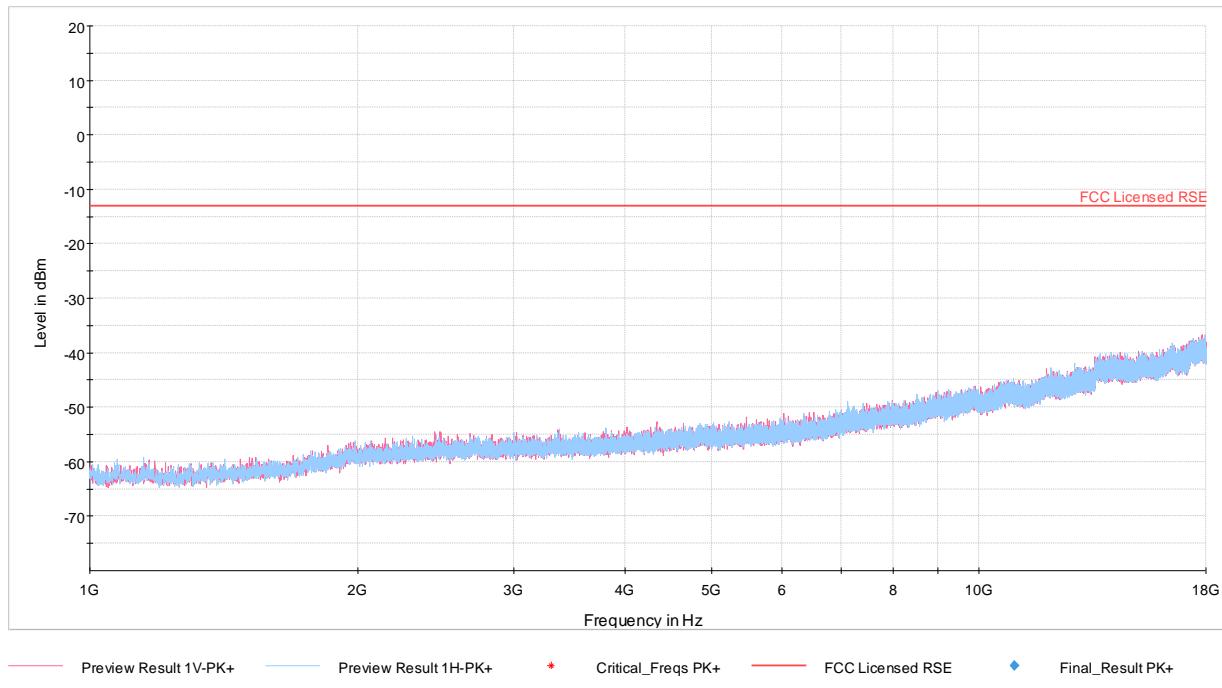

Plot 7-49. Radiated Spurious Plot above 1GHz (Band 26)

OPERATING FREQUENCY: 814.70 MHz
 CHANNEL: 26697
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 1.4 MHz
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 1629.40 | V | - | - | -73.66 | 4.49 | -69.17 | -56.2 |
| 2444.10 | V | 338 | 172 | -66.09 | 5.56 | -60.53 | -47.5 |
| 3258.80 | V | - | - | -72.16 | 7.20 | -64.96 | -52.0 |
| 4073.50 | V | - | - | -71.93 | 7.81 | -64.12 | -51.1 |

Table 7-8. Radiated Spurious Data (LTE Band 26 – Low Channel)


| | | | | |
|--|-------------------------------------|----------------------------|--|---------------------------------|
| FCC ID: BCGA1895 | MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | | |

OPERATING FREQUENCY: 823.30 MHz
 CHANNEL: 26783
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 1.4 MHz
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 1646.60 | V | - | - | -73.18 | 4.17 | -69.01 | -56.0 |
| 2469.90 | V | 203 | 261 | -69.21 | 6.47 | -62.74 | -49.7 |
| 3293.20 | V | - | - | -72.03 | 7.79 | -64.24 | -51.2 |
| 4116.50 | V | - | - | -72.23 | 8.60 | -63.64 | -50.6 |

Table 7-9. Radiated Spurious Data (LTE Band 26 – High Channel)

| | | | | |
|--|---|----------------------------|---------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 50 of 62 | |

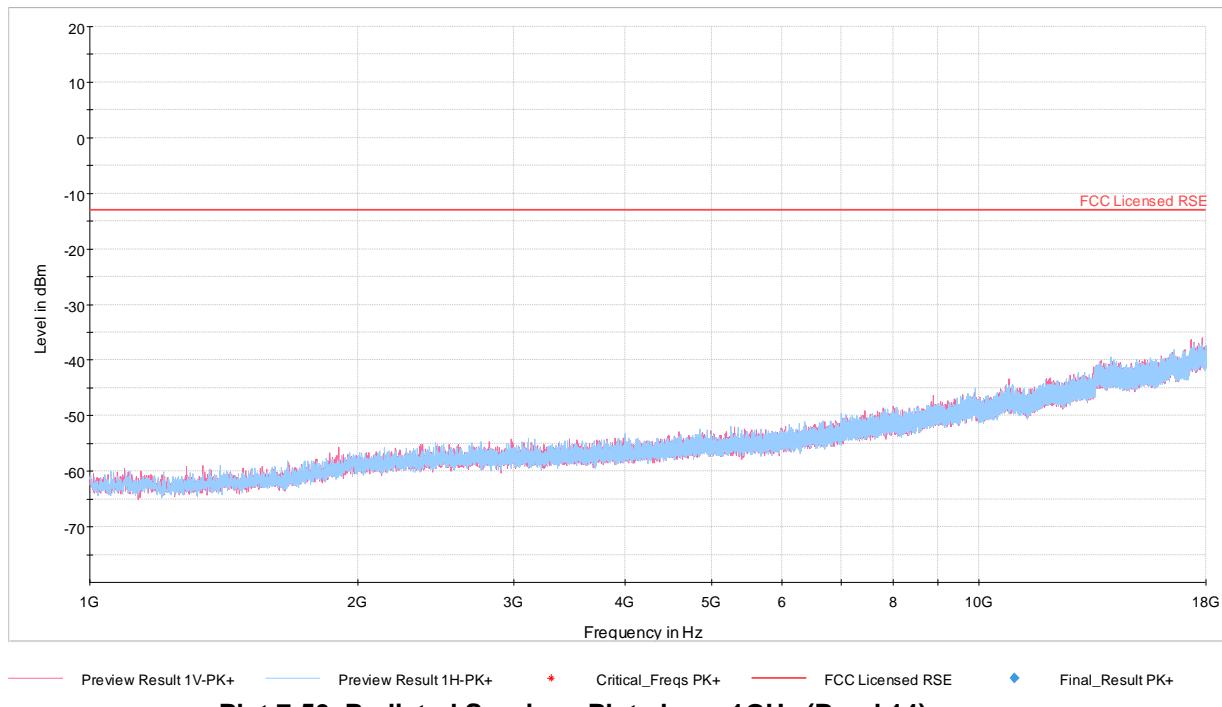
Plot 7-50. Radiated Spurious Plot above 1GHz (Band 14)

OPERATING FREQUENCY: 790.50 MHz

CHANNEL: 23305

MODULATION SIGNAL: QPSK

BANDWIDTH: 5.0 MHz

DISTANCE: 3 meters

LIMIT: -13 dBm

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 2374.00 | V | - | - | -69.88 | 4.22 | -65.66 | -52.7 |
| 3167.00 | V | - | - | -70.69 | 6.28 | -64.41 | -51.4 |

Table 7-10. Radiated Spurious Data (LTE Band 14 – Low Channel)

| | | | | |
|--|-------------------------------------|----------------------------|---------------|---------------------------------|
| FCC ID: BCGA1895 | MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 51 of 62 | |

OPERATING FREQUENCY: 793.00 MHz
 CHANNEL: 23330
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 2379.00 | V | - | - | -69.76 | 4.23 | -65.53 | -52.5 |
| 3172.00 | V | - | - | -70.85 | 6.29 | -64.56 | -51.6 |

Table 7-11. Radiated Spurious Data (LTE Band 14 – Mid Channel)

OPERATING FREQUENCY: 795.50 MHz
 CHANNEL: 23355
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 2384.00 | V | - | - | -69.82 | 4.24 | -65.58 | -52.6 |
| 3177.00 | V | - | - | -71.09 | 6.30 | -64.79 | -51.8 |

Table 7-12. Radiated Spurious Data (LTE Band 14 – High Channel)

| | | | | |
|--|---|----------------------------|---------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 52 of 62 | |

MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.00 MHz
 DISTANCE: 3 meters
 NARROWBAND EMISSION LIMIT: -50 dBm
 WIDEBAND EMISSION LIMIT: -40 dBm/MHz

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 1581.00 | V | - | - | -72.88 | 4.28 | -68.61 | -28.6 |
| 1586.00 | V | - | - | -72.95 | 4.30 | -68.65 | -28.7 |
| 1591.00 | V | - | - | -73.04 | 4.32 | -68.72 | -28.7 |

Table 7-13. Radiated Spurious Data (Band 14 – 1559-1610MHz Band)

| | | | | |
|--|---|----------------------------|---------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 53 of 62 | |

7.7.2 ANT 1 (Port B) Radiated Spurious Emissions Measurements

OPERATING FREQUENCY: 814.70 MHz
 CHANNEL: 26697
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 1.4 MHz
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 1629.40 | H | - | - | -71.81 | 4.49 | -67.32 | -54.3 |
| 2444.10 | H | - | - | -69.00 | 5.56 | -63.44 | -50.4 |
| 3258.80 | H | - | - | -70.18 | 7.20 | -62.98 | -50.0 |

Table 7-14. Radiated Spurious Data (LTE Band 26 – Low Channel)

OPERATING FREQUENCY: 823.30 MHz
 CHANNEL: 26783
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 1.4 MHz
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 1646.60 | H | - | - | -71.44 | 4.17 | -67.27 | -54.3 |
| 2469.90 | H | - | - | -69.80 | 6.47 | -63.33 | -50.3 |
| 3293.20 | H | - | - | -70.49 | 7.79 | -62.70 | -49.7 |

Table 7-15. Radiated Spurious Data (LTE Band 26 – High Channel)

| | | | | | |
|--|--|------------------------------------|--|--|---------------------------------|
| FCC ID: BCGA1895 |  PCTEST <small>Engineering Laboratory, Inc.</small> | MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | | | |

OPERATING FREQUENCY: 790.50 MHz
 CHANNEL: 23305
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 2371.50 | V | - | - | -68.13 | 4.21 | -63.92 | -50.9 |
| 3162.00 | V | - | - | -69.39 | 6.27 | -63.11 | -50.1 |
| 3952.50 | V | - | - | -69.86 | 7.48 | -62.38 | -49.4 |

Table 7-16. Radiated Spurious Data (LTE Band 14 – Low Channel)

OPERATING FREQUENCY: 793.00 MHz
 CHANNEL: 23330
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 2379.00 | V | - | - | -67.91 | 4.23 | -63.68 | -50.7 |
| 3172.00 | V | - | - | -69.10 | 6.29 | -62.81 | -49.8 |
| 3965.00 | V | - | - | -69.96 | 7.50 | -62.46 | -49.5 |

Table 7-17. Radiated Spurious Data (LTE Band 14 – Mid Channel)

| | | | | |
|--|---|----------------------------|---------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 55 of 62 | |

OPERATING FREQUENCY: 795.50 MHz
 CHANNEL: 23355
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 2386.50 | V | - | - | -67.73 | 4.24 | -63.49 | -50.5 |
| 3182.00 | V | - | - | -69.19 | 6.31 | -62.87 | -49.9 |
| 3977.50 | V | - | - | -69.90 | 7.51 | -62.38 | -49.4 |

Table 7-18. Radiated Spurious Data (LTE Band 14 – High Channel)

MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.00 MHz
 DISTANCE: 3 meters
 NARROWBAND EMISSION LIMIT: -50 dBm
 WIDEBAND EMISSION LIMIT: -40 dBm/MHz

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 1581.00 | V | - | - | -71.63 | 4.28 | -67.36 | -27.4 |
| 1586.00 | V | - | - | -71.46 | 4.30 | -67.16 | -27.2 |
| 1591.00 | V | - | - | -71.49 | 4.32 | -67.17 | -27.2 |

Table 7-19. Radiated Spurious Data (Band 14 – 1559-1610MHz Band)

| | | | | |
|--|---|----------------------------|---------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 56 of 62 | |

7.8 Frequency Stability / Temperature Variation

§2.1055 §90.213

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Test Procedure Used

ANSI/TIA-603-E-2016

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

| | | | |
|--|--|----------------------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 57 of 62 |

Frequency Stability / Temperature Variation

§2.1055, §90.213

| | | |
|----------------------|------------------------|-----|
| OPERATING FREQUENCY: | 819,000,000 | Hz |
| CHANNEL: | 26740 | |
| REFERENCE VOLTAGE: | 3.80 | VDC |
| DEVIATION LIMIT: | ± 0.00025 % or 2.5 ppm | |

| VOLTAGE (%) | POWER (VDC) | TEMP (°C) | FREQUENCY (Hz) | Freq. Dev. (Hz) | Deviation (%) |
|----------------|-------------|-----------|----------------|-----------------|---------------|
| 100 % | 3.80 | - 30 | 819,000,005 | 5 | 0.0000005 |
| 100 % | | - 20 | 819,000,005 | 5 | 0.0000006 |
| 100 % | | - 10 | 819,000,006 | 6 | 0.0000007 |
| 100 % | | 0 | 819,000,007 | 7 | 0.0000008 |
| 100 % | | + 10 | 819,000,006 | 6 | 0.0000007 |
| 100 % | | + 20 | 819,000,005 | 5 | 0.0000007 |
| 100 % | | + 30 | 819,000,006 | 6 | 0.0000007 |
| 100 % | | + 40 | 819,000,005 | 5 | 0.0000006 |
| 100 % | | + 50 | 819,000,005 | 5 | 0.0000006 |
| BATT. ENDPOINT | 3.40 | + 20 | 819,000,006 | 6 | 0.0000007 |

Table 7-20. LTE Band 26 Frequency Stability Data

| | | |
|--|---|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device |

Frequency Stability / Temperature Variation

§2.1055, §90.213

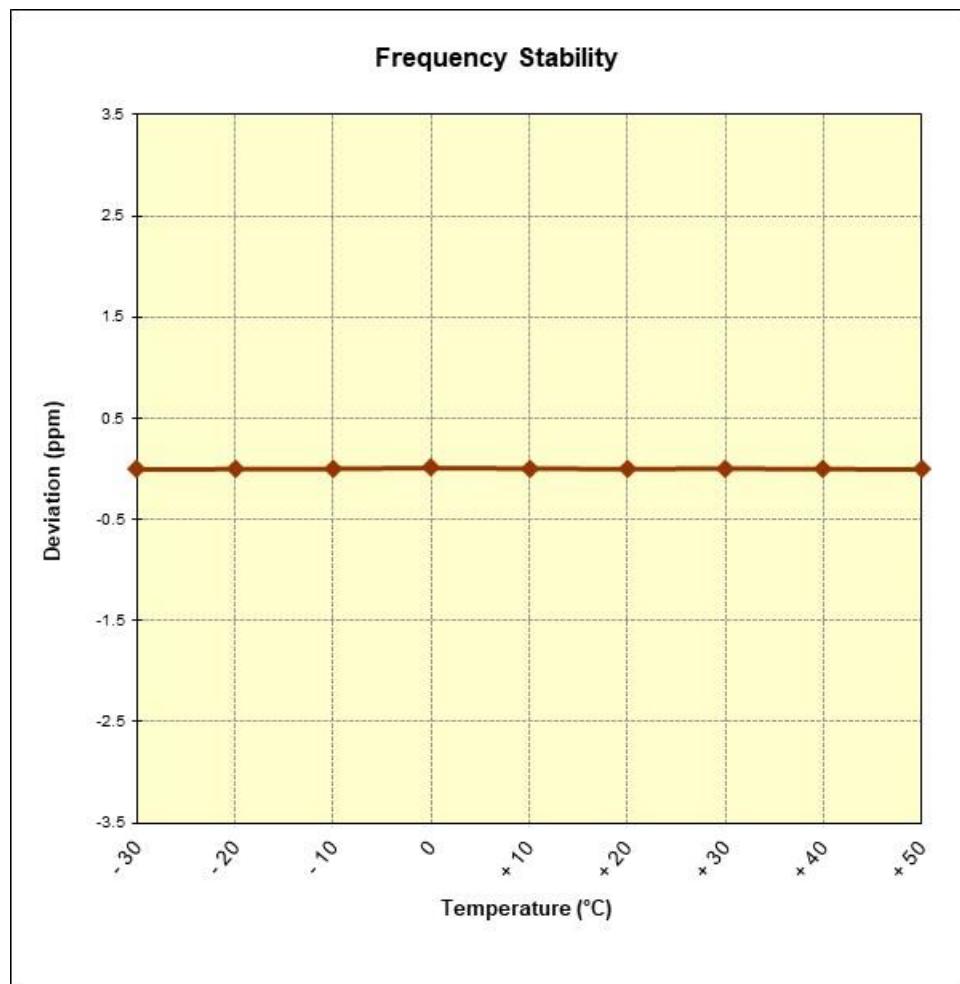


Figure 7-7. LTE Band 26 Frequency Stability Data

| | | | |
|--|---|----------------------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 59 of 62 |

Frequency Stability / Temperature Variation

§2.1055, §90.213

OPERATING FREQUENCY: 793,000,000 Hz

CHANNEL: 23330

REFERENCE VOLTAGE: 3.80 VDC

| VOLTAGE (%) | POWER (VDC) | TEMP (°C) | FREQUENCY (Hz) | Freq. Dev. (Hz) | Deviation (%) |
|----------------|-------------|-----------|----------------|-----------------|---------------|
| 100 % | 3.80 | - 30 | 793,000,005 | 5 | 0.0000006 |
| 100 % | | - 20 | 793,000,005 | 5 | 0.0000006 |
| 100 % | | - 10 | 793,000,007 | 7 | 0.0000009 |
| 100 % | | 0 | 793,000,005 | 5 | 0.0000006 |
| 100 % | | + 10 | 793,000,006 | 6 | 0.0000007 |
| 100 % | | + 20 | 793,000,005 | 5 | 0.0000006 |
| 100 % | | + 30 | 793,000,007 | 7 | 0.0000009 |
| 100 % | | + 40 | 793,000,005 | 5 | 0.0000007 |
| 100 % | | + 50 | 793,000,006 | 6 | 0.0000007 |
| BATT. ENDPOINT | 3.40 | + 20 | 793,000,005 | 5 | 0.0000006 |

Table 7-21. LTE Band 14 Frequency Stability Data

| | | | | |
|--|---|----------------------------|---------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 60 of 62 | |

Frequency Stability / Temperature Variation

§2.1055, §90.213

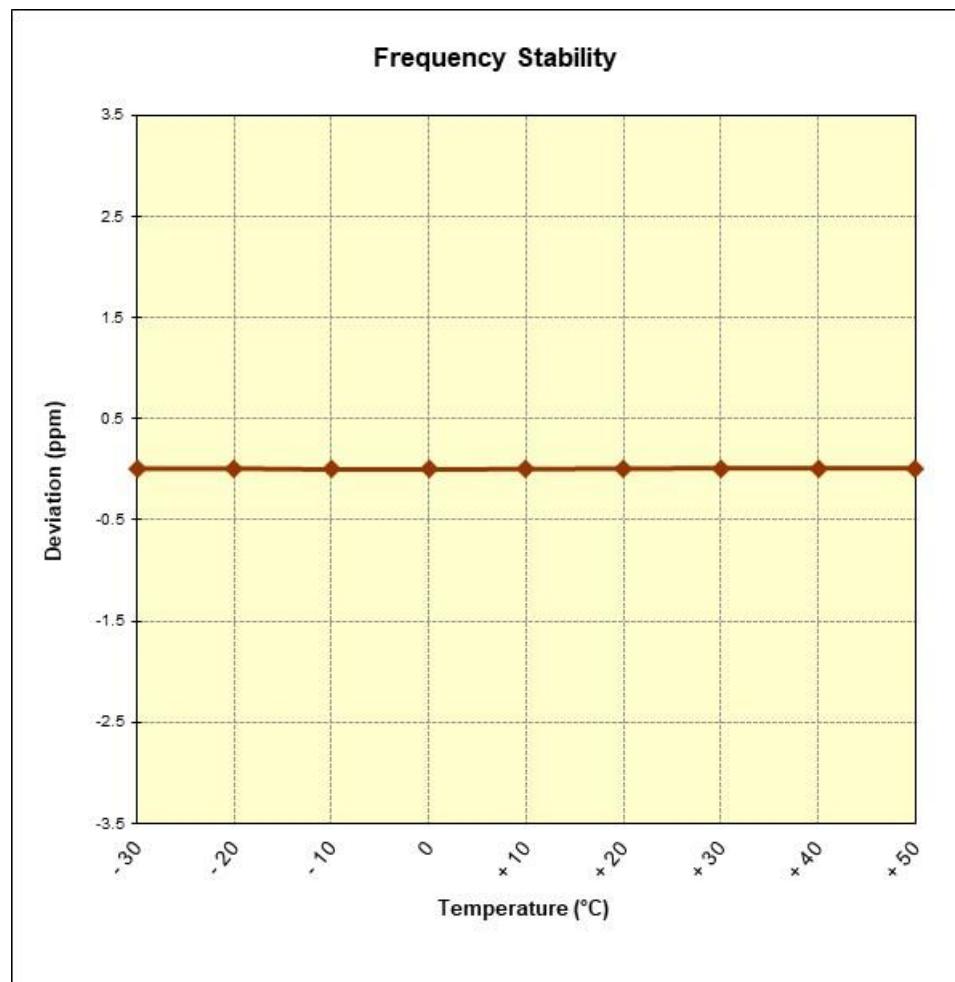


Figure 7-8. LTE Band 14 Frequency Stability Data

| | | | |
|--|---|----------------------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 61 of 62 |

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Apple Inc. Tablet Device**
FCC ID: BCGA1895 complies with all the requirements of Part 90 of the FCC rules.

| | | | |
|--|--|----------------------------|---------------------------------|
| FCC ID: BCGA1895 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1806220014-04-R1.BCG | Test Dates: 7/31/2018-10/18/2018 | EUT Type: Tablet Device | Page 62 of 62 |