

Report on the FCC and IC Testing of the: Apple Inc. Model: A1932

In accordance with FCC 47 CFR Part 15C and
Industry Canada RSS-247 and Industry Canada
RSS-GEN

Prepared for: Apple Inc.
One Apple Park Way
Cupertino
California 95014
USA

FCC ID: BCGA1932 IC: 579C-A1932



Product Service

Choose certainty.
Add value.

COMMERCIAL-IN-CONFIDENCE

Document Number: 75942371-11 | Issue: 01

SIGNATURE

SIGNATURE			
NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Matthew Russell	RF Team Leader	Authorised Signatory	16 October 2018

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Product Service document control rules.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15E and Industry Canada RSS-247 and Industry Canada RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

SIGNATURE

SIGNATURE				
NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE	
Dan Bishop	Assistant Engineer	Testing	16 October 2018	
Sharif Sendagire	Shift Engineer	Testing	16 October 2018	
Graeme Lawler	Test Engineer	Testing	16 October 2018	
N Mathivanan	Engineer	Testing	16 October 2018	
Jay Balendrarajah	Shift Technician	Testing	16 October 2018	
Tony Hubbard	Test Engineer	Testing	16 October 2018	

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15E: 2017, Industry Canada RSS-247: Issue 2 (2017-02) and Industry Canada RSS-GEN: Issue 5 (2018-04).

DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD Product Service with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD Product Service. No part of this document may be reproduced without the prior written approval of TÜV SÜD Product Service. © 2018 TÜV SÜD Product Service.

ACCREDITATION

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation. Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).



TÜV SÜD Product Service
is a trading name of TUV SUD Ltd
Registered in Scotland at East Kilbride,
Glasgow G75 0QF, United Kingdom
Registered number: SC215164

TÜV SUD Ltd is a
TÜV SÜD Group Company

Phone: +44 (0) 1489 558100
Fax: +44 (0) 1489 558101
www.tuv-sud.co.uk

TÜV SÜD Product Service
Octagon House
Concorde Way
Fareham
Hampshire PO15 5RL
United Kingdom

Contents

1	Report Summary	2
1.1	Report Modification Record.....	2
1.2	Introduction.....	2
1.3	Brief Summary of Results	3
1.4	Product Information	4
1.5	Deviations from the Standard.....	4
1.6	EUT Modification Record	4
1.7	Test Location.....	5
2	Test Details	6
2.1	Maximum Conducted Output Power	6
2.2	Power Spectral Density	10
2.3	Emission Bandwidth	14
2.4	Authorised Band Edges	17
2.5	Restricted Band Edges	20
2.6	Spurious Radiated Emissions	24
3	Measurement Uncertainty	37

1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	16 October 2018

Table 1

1.2 Introduction

Applicant	Apple Inc.
Manufacturer	Apple Inc.
Model Number(s)	A1932
Serial Number(s)	C02X5004JL9H and C02WG001JV8M
Hardware Version(s)	EVT2
Software Version(s)	18B2034
Number of Samples Tested	2
Test Specification/Issue/Date	FCC 47 CFR Part 15C, Industry Canada RSS-247 and Industry Canada RSS-GEN: 2016 and Issue 2 (2017-02) and Issue 4 (2014-11)
Order Number	0540166213
Date	06-April-2018
Date of Receipt of EUT	23-August 2018
Start of Test	07-September-2018
Finish of Test	05-Oct-2018
Name of Engineer(s)	Dan Bishop, Sharifu Sendagire, Graeme Lawler, Tony Hubbard, Nandhini Mathivanan, Jay Balendrarajah
Related Document(s)	ANSI C63.10 (2013)



1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15C and Industry Canada RSS-247 and Industry Canada RSS-GEN is shown below.

Section	Specification Clause			Test Description	Result	Comments/Base Standard
	Part 15C	RSS-247	RSS-GEN			
Configuration and Mode: Bluetooth Low Energy - iPA (1M)						
2.1	15.247 (b)	5.4	6.12	Maximum Conducted Output Power	Pass	ANSI C63.10 (2013)
2.2	15.247 (e)	5.2	6.12	Power Spectral Density	Pass	ANSI C63.10 (2013)
2.3	15.247 (a)(2)	5.2	6.6	Emission Bandwidth	Pass	ANSI C63.10 (2013)
2.4	15.247 (d)	5.5	-	Authorised Band Edges	Pass	ANSI C63.10 (2013)
2.5	15.205	-	8.10	Restricted Band Edges	Pass	ANSI C63.10 (2013)
2.6	15.247 (d) and 15.205	5.5	6.13	Spurious Radiated Emissions	Pass	ANSI C63.10 (2013)

Table 2

1.4 Product Information

1.4.1 Technical Description

The Equipment Under Test (EUT) was a Laptop computer, with Bluetooth, Bluetooth Low Energy and 802.11 b/g/n/ac capabilities in the 2.4GHz and 5GHz bands.

1.5 Deviations from the Standard

No deviations from the applicable test standard were made during testing.

1.6 EUT Modification Record

The table below details modifications made to the EUT during the test programme. The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
Serial Number: C02WG001JV8M			
0	As supplied by the customer	Not Applicable	Not Applicable
Serial Number: C02X5004JL9H			
0	As supplied by the customer	Not Applicable	Not Applicable

Table 3

1.7 Test Location

TÜV SÜD Product Service conducted the following tests at our Fareham Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: Bluetooth Low Energy - iPA (1M)		
Maximum Conducted Output Power	Daniel Bishop	UKAS
Power Spectral Density	Daniel Bishop	UKAS
Emission Bandwidth	Daniel Bishop	UKAS
Authorised Band Edges	Dan Bishop, Sharifu Sendagire, Graeme Lawler, Tony Hubbard, Nandhini Mathivanan,	UKAS
Restricted Band Edges	Jay Balendararajah	UKAS
Spurious Radiated Emissions		UKAS

Table 4

Office Address:

Octagon House
Concorde Way
Segensworth North
Fareham
Hampshire
PO15 5RL
United Kingdom

2 Test Details

2.1 Maximum Conducted Output Power

2.1.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (b)(3)
Industry Canada RSS-247, Clause 5.4

2.1.2 Equipment Under Test and Modification State

A1932, S/N: C02X5004JL9H - Modification State 0

2.1.3 Date of Test

27-September-2018

2.1.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 11.9.1.1.

2.1.5 Environmental Conditions

Ambient Temperature 27.0 °C
Relative Humidity 44.1 %

2.1.6 Test Results

Bluetooth Low Energy - iPA (1M)

Testing was performed on the modulation/packet type with the highest conducted output power.

Modulation/Packet Type: GFSK/DH1

Frequency (MHz)	Output Power	
	dBm	mW
2402	6.17	4.140
2440	6.34	4.305
2480	6.35	4.315

Table 5

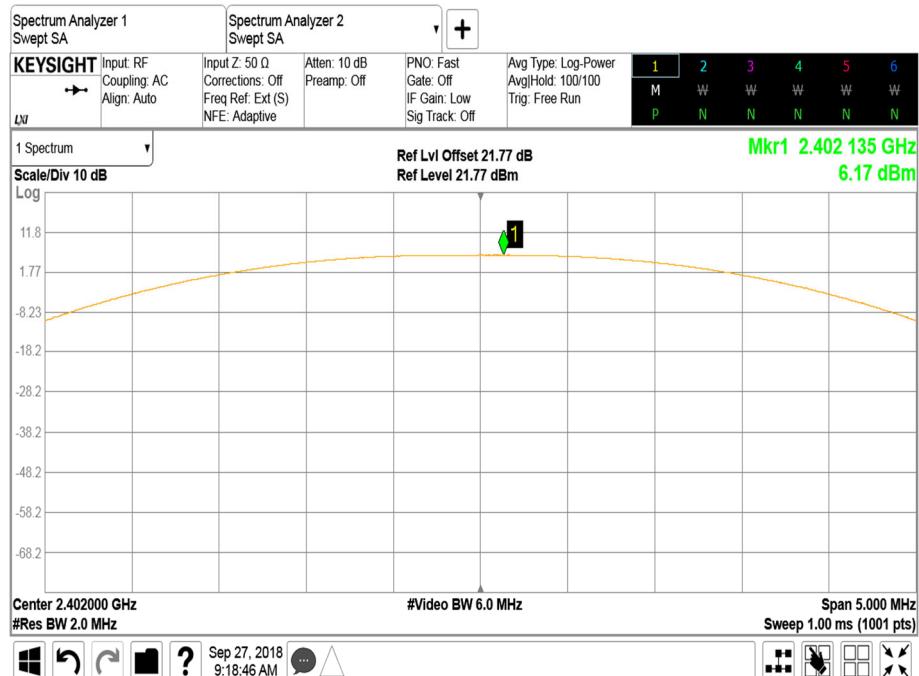


Figure 1 - 2402 MHz - Maximum Output Power (1M)

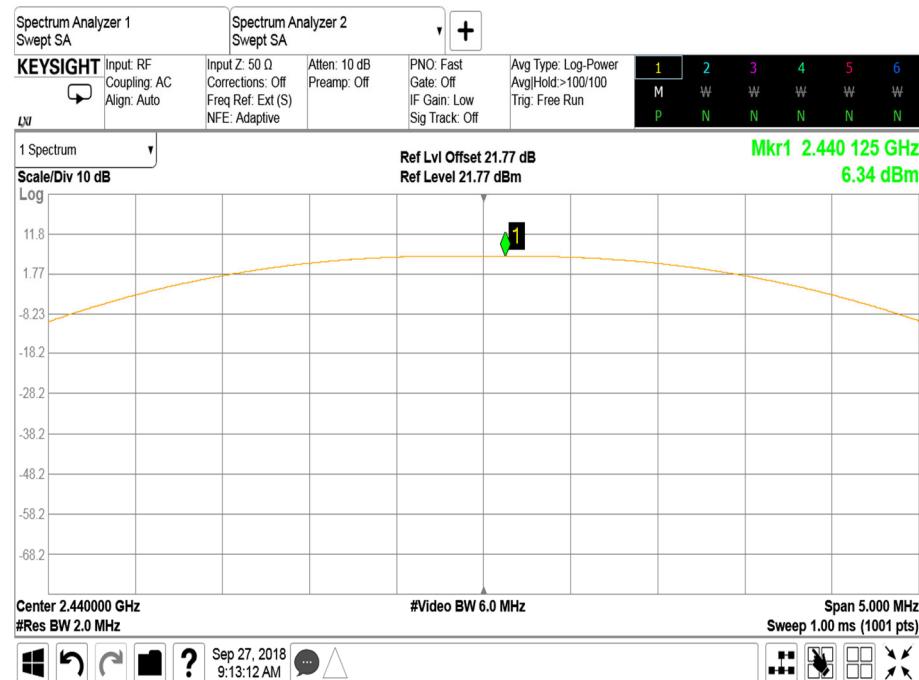


Figure 2 - 2440 MHz - Maximum Output Power (1M)

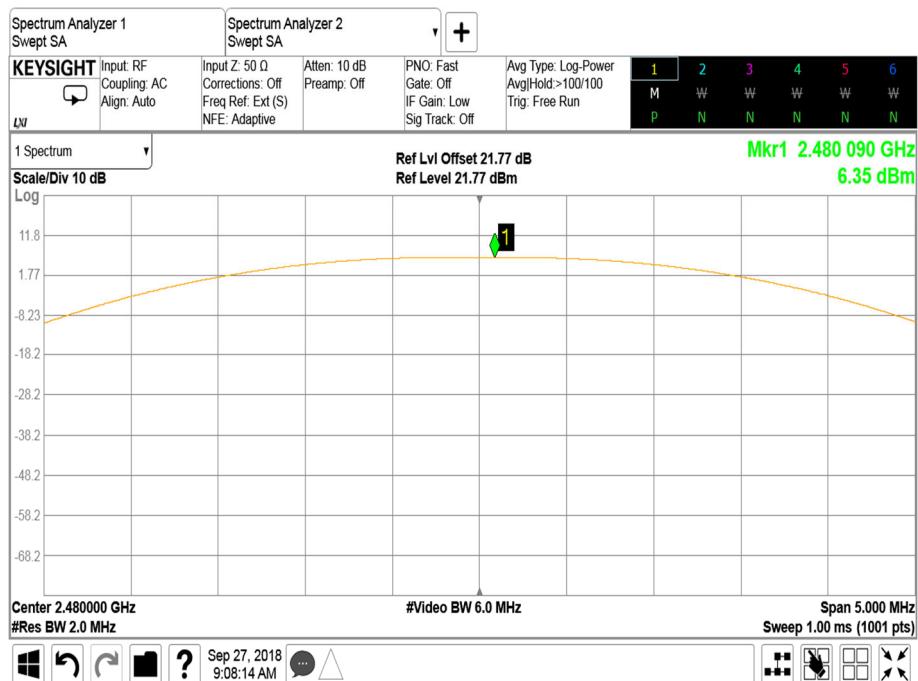


Figure 3 - 2480 MHz - Maximum Output Power (1M)

FCC 47 CFR Part 15, Limit Clause 15.247 (b)(3)

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

Industry Canada RSS-247, Limit Clause 5.4 (d)

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e) of the specification.

2.1.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 3.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Rubidium Standard	Rohde & Schwarz	XSRM	1316	6	20-Oct-2018
Hygrometer	Rotronic	A1	1388	12	20-Jun-2019
Attenuator (20dB, 10W)	Aeroflex / Weinschel	23-20-34	3160	12	02-Aug-2019
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	02-Oct-2018
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	06-Mar-2019
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	20-Oct-2018
EXA	Keysight Technologies	N9010B	4969	12	21-Dec-2018

Table 6



2.2 Power Spectral Density

2.2.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (e)
Industry Canada RSS-247, Clause 5.2

2.2.2 Equipment Under Test and Modification State

A1932, S/N: C02X5004JL9H - Modification State 0

2.2.3 Date of Test

27-September-2018

2.2.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 11.10.2.

2.2.5 Environmental Conditions

Ambient Temperature 26.6 °C
Relative Humidity 44.6 %

2.2.6 Test Results

Bluetooth Low Energy - iPA (1M)

Modulation/Packet Type: GFSK/DH1

Frequency (MHz)	Power Spectral Density (dBm)
2402	0.67
2440	0.77
2480	0.52

Table 7 - Power Spectral Density

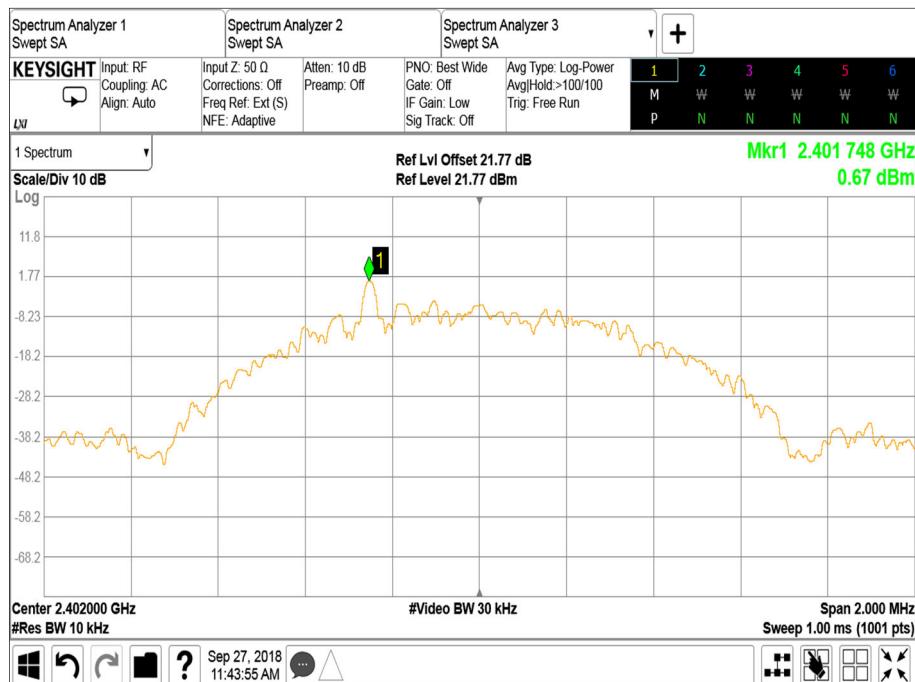


Figure 4 - 2402 MHz, Power Spectral Density (1M)

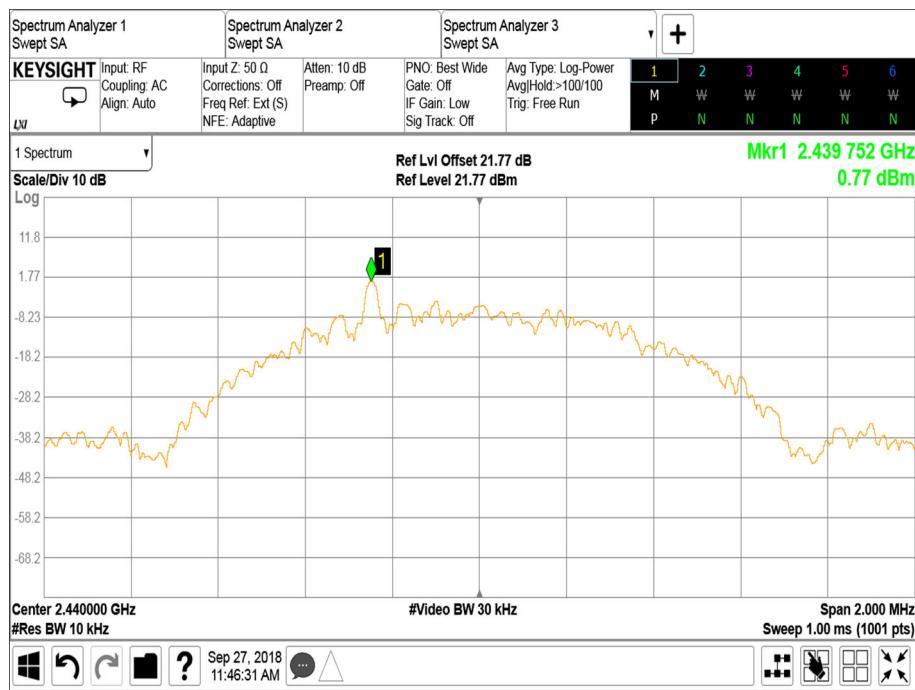


Figure 5 - 2440 MHz, Power Spectral Density (1M)

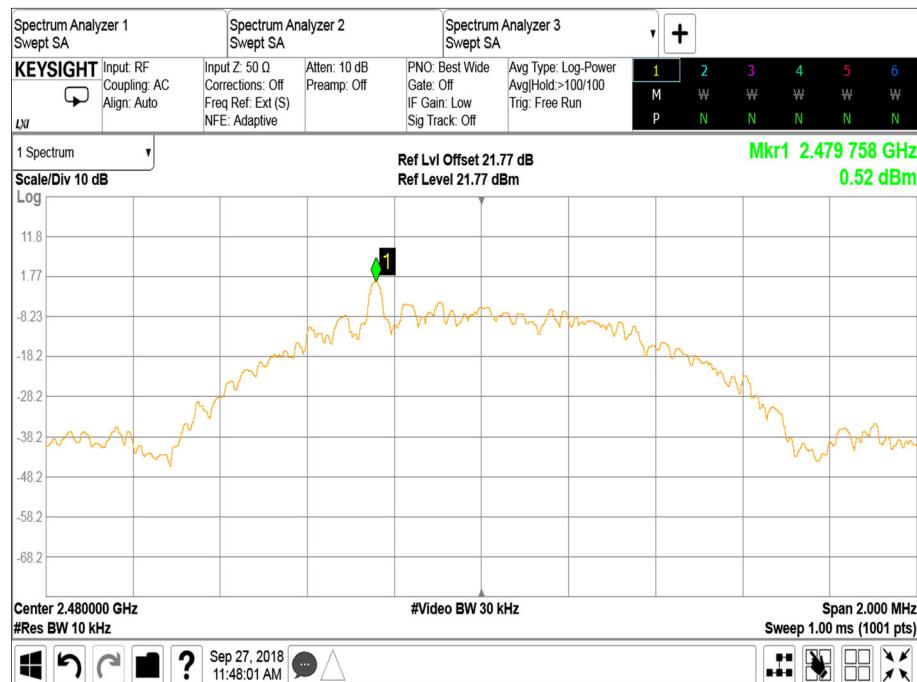


Figure 6 - 2480 MHz, Power Spectral Density (1M)

FCC 47 CFR Part 15, Limit Clause 15.247 (e)

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Industry Canada RSS-247, Limit Clause 5.2(b)

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission

2.2.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 3.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Rubidium Standard	Rohde & Schwarz	XSRM	1316	6	20-Oct-2018
Hygrometer	Rotronic	A1	1388	12	20-Jun-2019
Attenuator (20dB, 10W)	Aeroflex / Weinschel	23-20-34	3160	12	02-Aug-2019
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	02-Oct-2018
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	06-Mar-2019
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	20-Oct-2018
EXA	Keysight Technologies	N9010B	4969	12	21-Dec-2018

Table 8



2.3 Emission Bandwidth

2.3.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (a)(2)
Industry Canada RSS-247, Clause 5.2

2.3.2 Equipment Under Test and Modification State

A1932, S/N: C02X5004JL9H - Modification State 0

2.3.3 Date of Test

25-September-2018

2.3.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 11.8.2.

2.3.5 Environmental Conditions

Ambient Temperature 26.5 °C
Relative Humidity 28.9 %

2.3.6 Test Results

Bluetooth Low Energy - iPA (1M)

Modulation/Packet Type: GFSK/DH1

Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
2402	0.7369	1.0756
2440	0.7284	1.0705
2480	0.7326	1.0702

Table 9

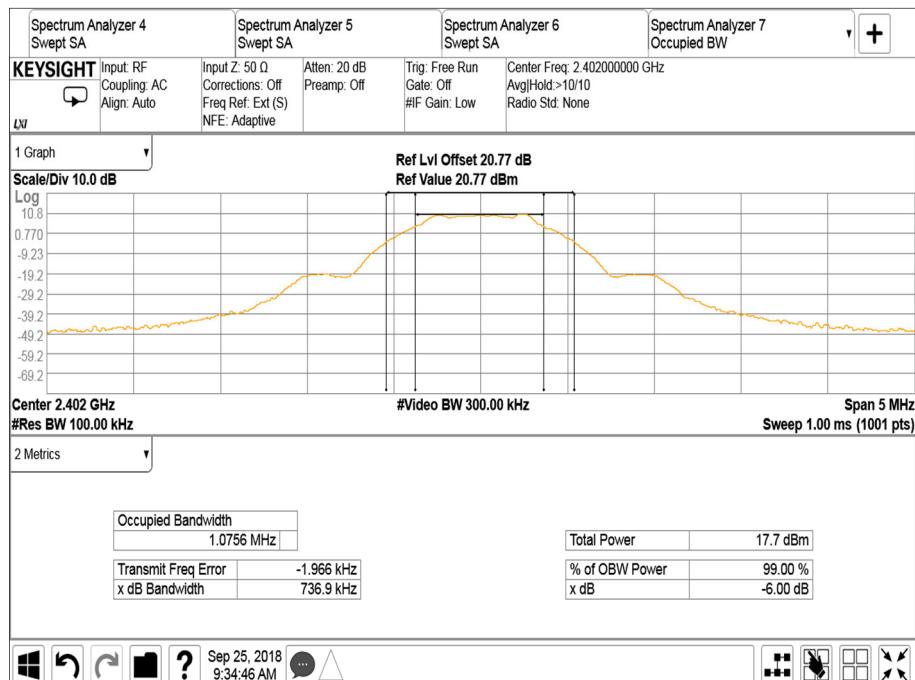


Figure 7 - 2402 MHz – 6 dB Bandwidth (1M)

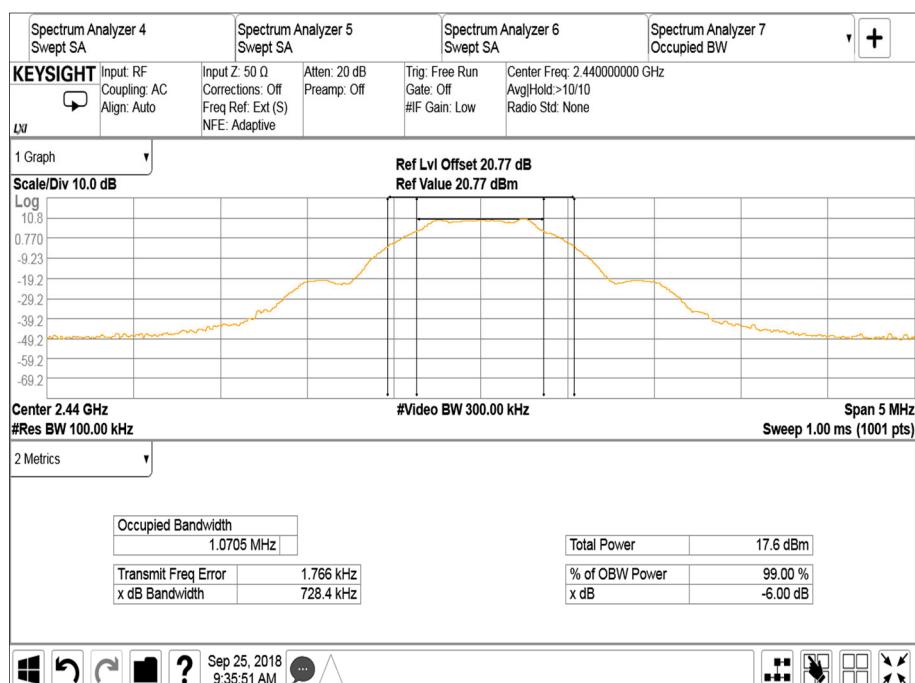


Figure 8 - 2440 MHz – 6 dB Bandwidth (1M)

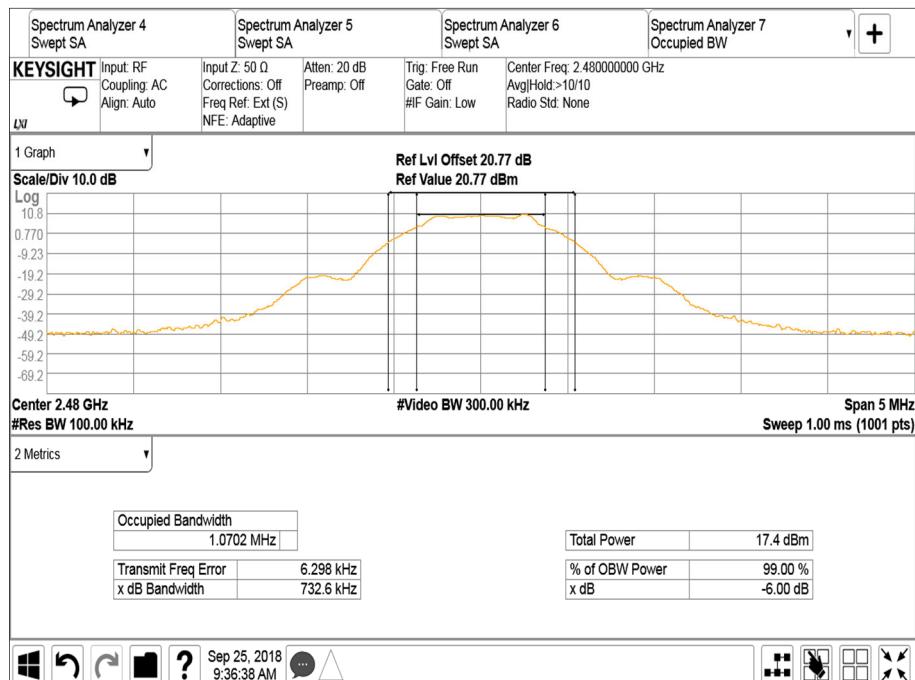


Figure 9 - 2480 MHz – 6 dB Bandwidth (1M)

FCC 47 CFR Part 15, Limit Clause 15.247(a)(2) and Industry Canada RSS-247, Clause 5.2(a)

The minimum 6 dB Bandwidth shall be at least 500 kHz.

2.3.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 3.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Rubidium Standard	Rohde & Schwarz	XSRM	1316	6	20-Oct-2018
Hygrometer	Rotronic	A1	1388	12	20-Jun-2019
Attenuator (20dB, 10W)	Aeroflex / Weinschel	23-20-34	3160	12	02-Aug-2019
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	02-Oct-2018
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	06-Mar-2019
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	20-Oct-2018
EXA	Keysight Technologies	N9010B	4969	12	21-Dec-2018

Table 10

2.4 Authorised Band Edges

2.4.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (d)
Industry Canada RSS-247, Clause 5.5

2.4.2 Equipment Under Test and Modification State

A1932, S/N: C02WG001JV8M - Modification State 0

2.4.3 Date of Test

08-September-2018

2.4.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 6.10.4

Note: 2483.5 MHz is both an Authorised Band edge and Restricted Band Edge. Of the two limits, the Restricted Band Edge is the most stringent and therefore demonstrates compliance with the 20 dBc Authorised Band Edge requirement."

2.4.5 Environmental Conditions

Ambient Temperature 23.1 °C
Relative Humidity 45.6 %

2.4.6 Test Results

Bluetooth Low Energy - iPA (1M)

Modulation	Packet Type	Frequency (MHz)	Measured Frequency (MHz)	Level (dBc)
GFSK	DH1	2402	2400.0	-57.69

Table 11

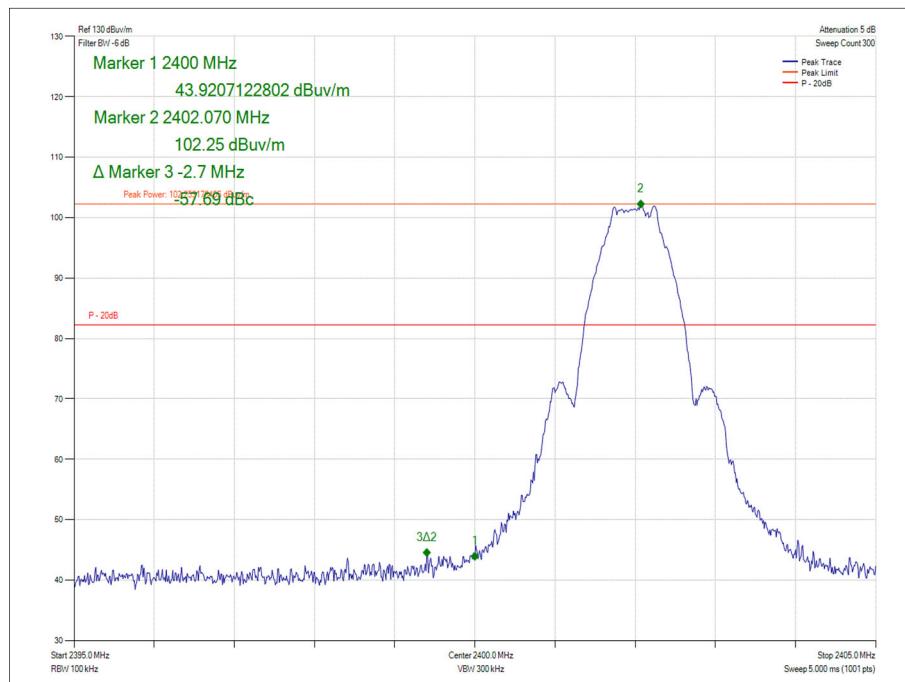


Figure 10 - GFSK/DH1 (1M) - 2402 MHz - Measured Frequency 2400.0 MHz

FCC 47 CFR Part 15, Limit Clause 15.247 (d)

20 dB below the fundamental measured in a 100 kHz bandwidth using a peak detector. If the transmitter complies with the conducted power limits, based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB below the fundamental instead of 20 dB.

Industry Canada RSS-247, Limit Clause 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

2.4.7 Test Location and Test Equipment Used

This test was carried out in EMC Chamber 5.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Hygrometer	Rotronic	HP21	4989	12	26-April-2019
Double Ridge Broadband Horn Antenna	Schwarzbeck	BBHA 9120 B	4848	12	12-Feb-2019
Screened Room (5)	Rainford	Rainford	1545	36	23-Jan-2021
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Tilt Antenna Mast	Maturo GmbH	TAM 4.0-P	4811	-	TU
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	22-Nov-2018
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	09-Oct-2018
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	06-Mar-2019
Cable	Rosenberger	LU7-071-1000	5104	6	05-Oct-2019
Cable	Rosenberger	LU7-071-2000	4528	-	O/P Mon
Cable	Rosenberger	2303-0 9.0m PNm PNm	4827	12	04-Jan-2019

Table 12

TU - Traceability Unscheduled

O/P Mon – Output Monitored using calibrated equipment



2.5 Restricted Band Edges

2.5.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.205
Industry Canada RSS-GEN, Clause 8.10

2.5.2 Equipment Under Test and Modification State

A1932, S/N: C02WG001JV8M - Modification State 0

2.5.3 Date of Test

08-September-2018

2.5.4 Test Method

Testing was performed in accordance with ANSI C63.10, clause 6.10.5

The following conversion can be applied to convert from dB μ V/m to μ V/m:
10[^] (Field Strength in dB μ V/m/20).

2.5.5 Environmental Conditions

Ambient Temperature 23.1 °C

Relative Humidity 45.6 %

2.5.6 Test Results

Bluetooth Low Energy - iPA (1M)

Modulation	Packet Type	Frequency (MHz)	Measured Frequency (MHz)	Peak Level (dB μ V/m)	Average Level (dB μ V/m)
GFSK	DH1	2402	2390.0	53.42	41.69
GFSK	DH1	2480	2483.5	54.68	43.73

Table 13

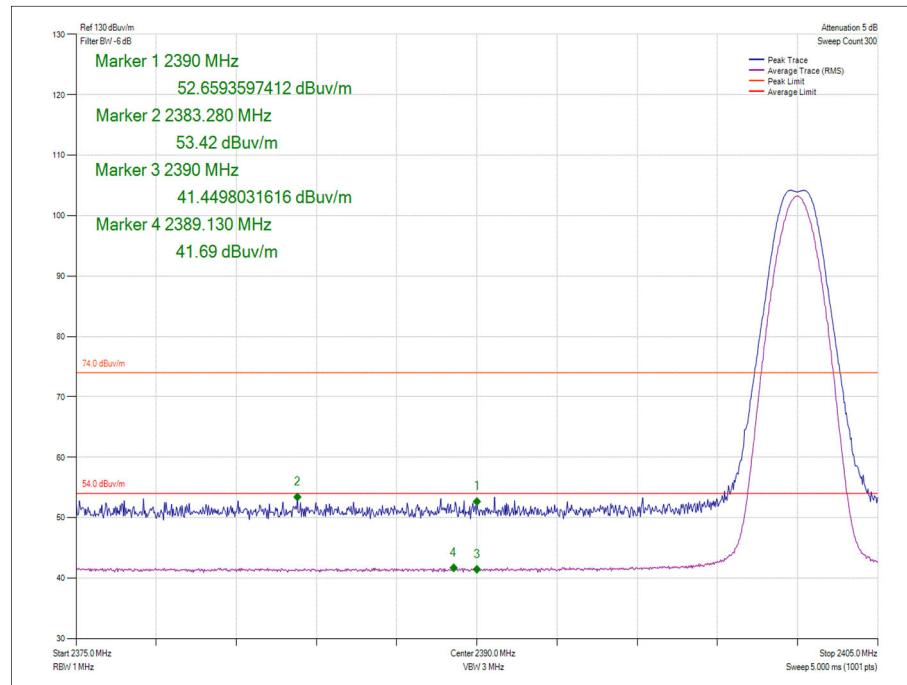


Figure 11 - GFSK/DH1 (1M) - 2402 MHz - Measured Frequency 2390.0 MHz

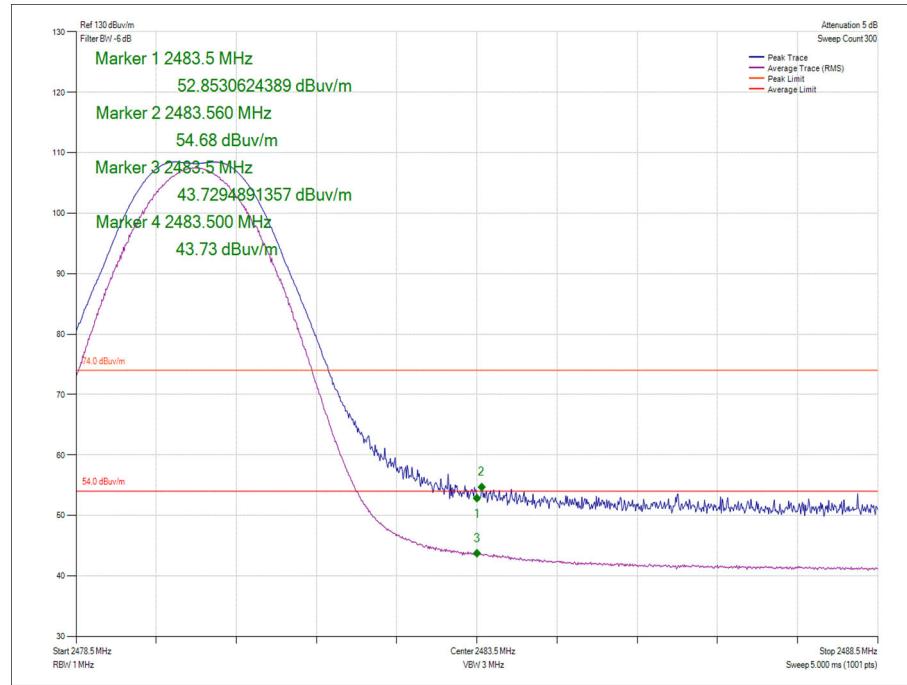


Figure 12 - GFSK/DH1 (1M) - 2480 MHz - Measured Frequency 2483.5 MHz

FCC 47 CFR Part 15, Limit Clause 15.209

Frequency (MHz)	Field Strength (μ V/m at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

Table 14

Industry Canada RSS-GEN, Limit Clause 8.9

Frequency (MHz)	Field Strength (μ V/m at 3 metres)
30-88	100
88-216	150
216-960	200
Above 960*	500

Table 15

*Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for licence-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.

2.5.7 Test Location and Test Equipment Used

This test was carried out in EMC Chamber 5.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Hygrometer	Rotronic	HP21	4989	12	26-April-2019
Double Ridge Broadband Horn Antenna	Schwarzbeck	BBHA 9120 B	4848	12	12-Feb-2019
Screened Room (5)	Rainford	Rainford	1545	36	23-Jan-2021
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Tilt Antenna Mast	Maturo GmbH	TAM 4.0-P	4811	-	TU
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	22-Nov-2018
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	09-Oct-2018
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	06-Mar-2019
Cable	Rosenberger	LU7-071-1000	5104	6	05-Oct-2019
Cable	Rosenberger	LU7-071-2000	4528	6	O/P Mon
Cable	Rosenberger	2303-0 9.0m PNm PNm	4827	12	04-Jan-2019

Table 16

TU - Traceability Unscheduled

O/P Mon – Output Monitored using calibrated equipment



2.6 Spurious Radiated Emissions

2.6.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (d) and 15.205
Industry Canada RSS-247, Clause 5.5
Industry Canada RSS-GEN, Clause 6.13

2.6.2 Equipment Under Test and Modification State

A1932, S/N: C02WG001JV8M - Modification State 0

2.6.3 Date of Test

26-September-2018 to 28-September-2018

2.6.4 Test Method

Testing was performed in accordance with ANSI C63.10 clause 6.3, 6.5 and 6.6.

In the 30MHz to 1GHz range pre scans were only performed on mid channel (2441 MHz) and any emissions identified then measured on bottom (2402 MHz) and top (2480 MHz).

Plots for average measurements were taken in accordance with ANSI C63.10-2013 using an average detector and max hold trace to characterize the EUT. Where emissions were detected, final average measurements were taken in accordance with ANSI C63.10-2013 clause 4.1.4.2.2.

The plots shown are the characterization of the EUT. The limits on the plots represent the most stringent case for restricted bands, (54/74 dB μ V/m @ 3m and 64/84 dB μ V/m @ 1m) when compared to 20 dBc outside restricted bands. The limits shown have been used as a threshold to determine where further measurements are necessary. Where results are within 10 dB of the limits shown on the plots, further investigation was carried out and reported in results tables.

The following conversion can be applied to convert from dB μ V/m to μ V/m:
 $10^{\text{Field Strength in dB}\mu\text{V/m}/20}$.

2.6.5 Environmental Conditions

Ambient Temperature 22.8 °C
Relative Humidity 41.1 %

2.6.6 Test Results

Bluetooth Low Energy - iPA (1M)

Testing was performed on the modulation and packet type which resulted in the highest conducted output power. Modulation/Packet Type: GFSK/DH1

Frequency (GHz)	Result (dB μ V/m)		Limit (dB μ V/m)		Margin (dB)	
	Peak	Average	Peak	Average	Peak	Average
*						

Table 17 – 2441 MHz - 30 MHz to 1 GHz – Radiated

*No emissions were detected within 10 dB of the limit.

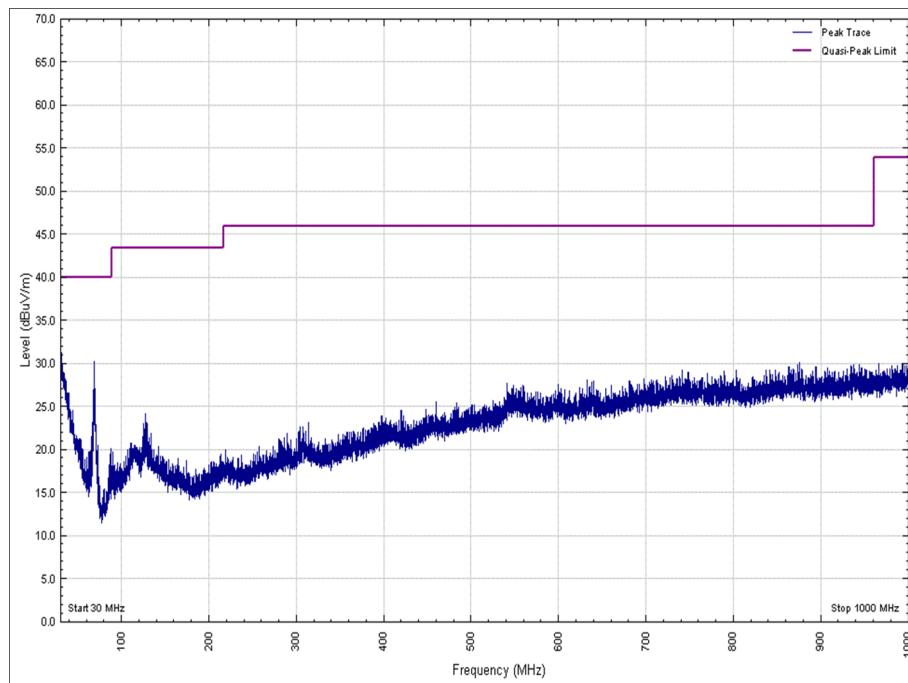


Figure 13 - 2441 MHz - 30 MHz to 1 GHz - Horizontal

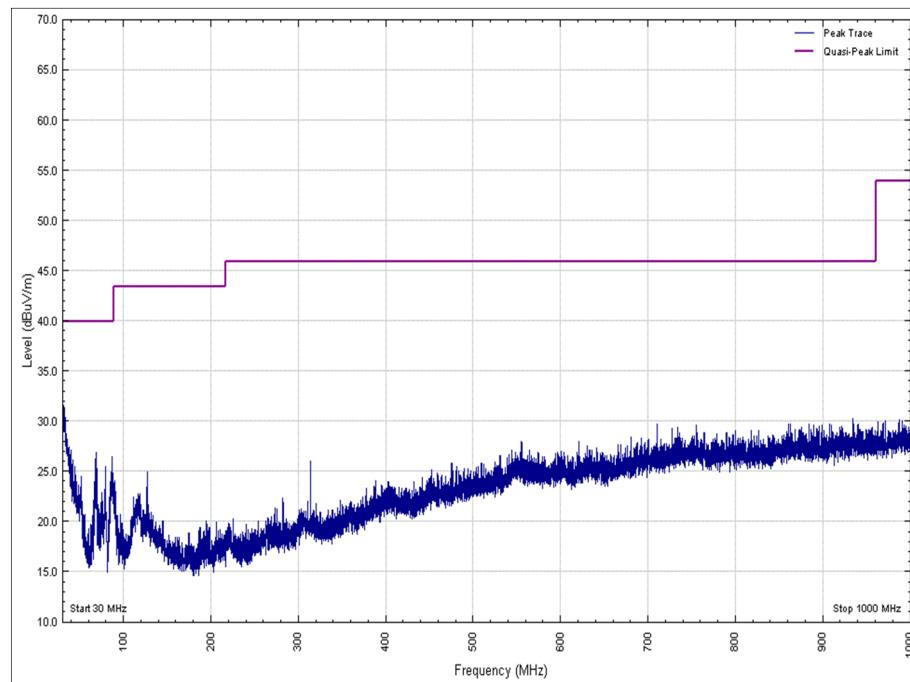


Figure 14 - 2441 MHz - 30 MHz to 1 GHz - Vertical

2402 MHz

Frequency (GHz)	Result (dB μ V/m)		Limit (dB μ V/m)		Margin (dB)	
	Peak	Average	Peak	Average	Peak	Average
4.804	46.09	44.29	74.0	54.0	27.91	9.71

Table 18 - 1 GHz to 26 GHz - Radiated

No other emissions were detected within 10 dB of the limit.

Note - The emissions seen at 2402 MHz is the EUT's intentional transmitter frequency and is therefore not subject to this test.

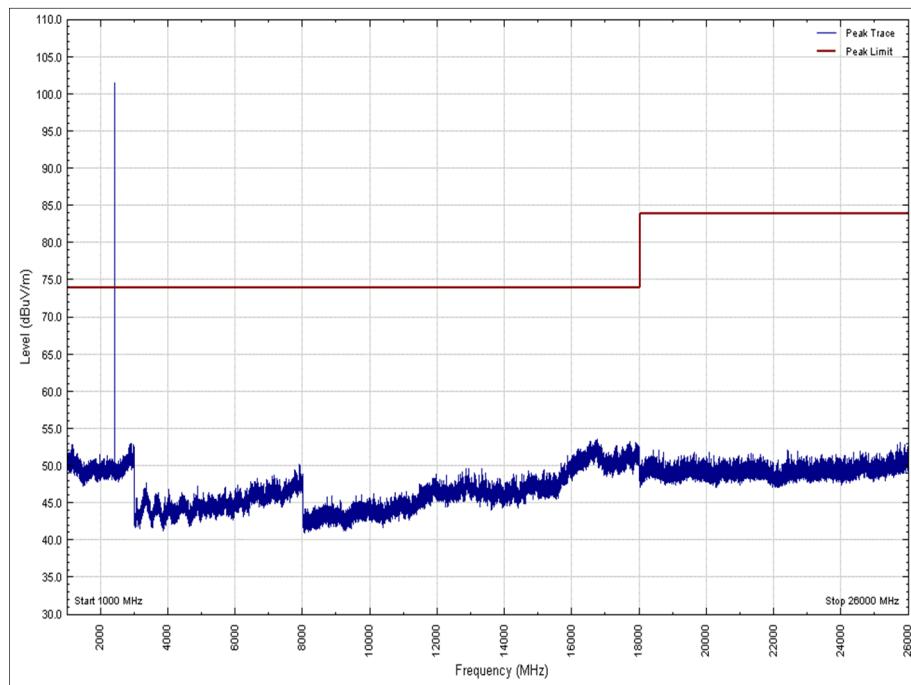


Figure 15 - 1 GHz to 26 GHz – Horizontal (Peak)

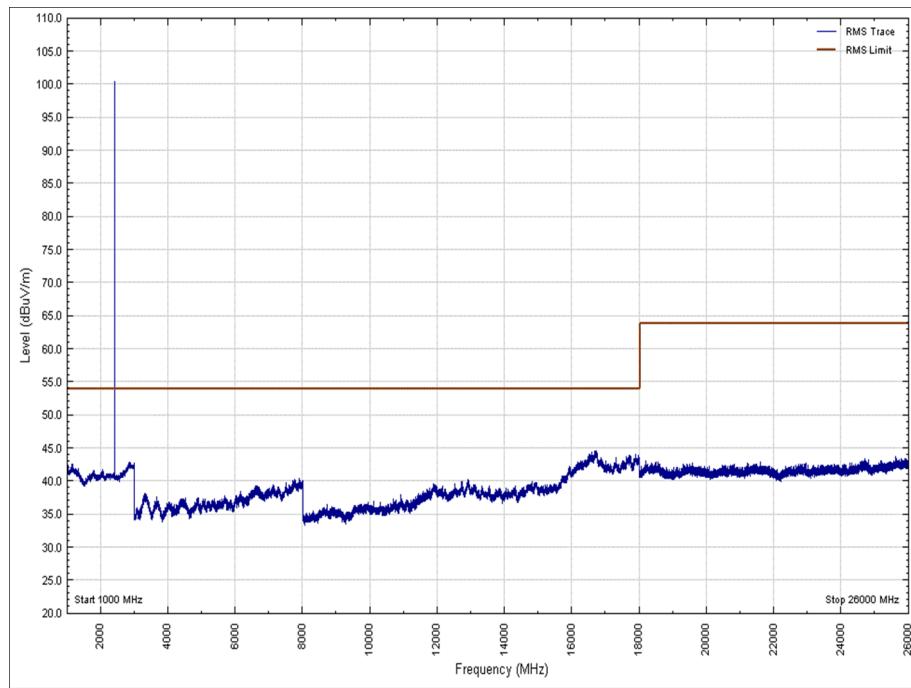


Figure 16 - 1 GHz to 26 GHz – Horizontal (Average)

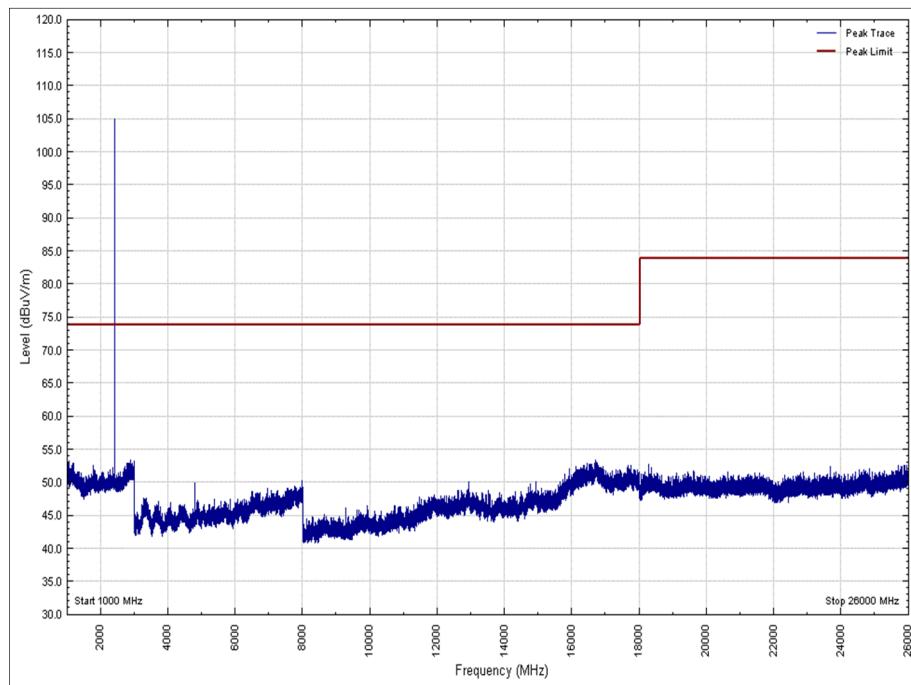


Figure 17 - 1 GHz to 26 GHz - Vertical (Peak)

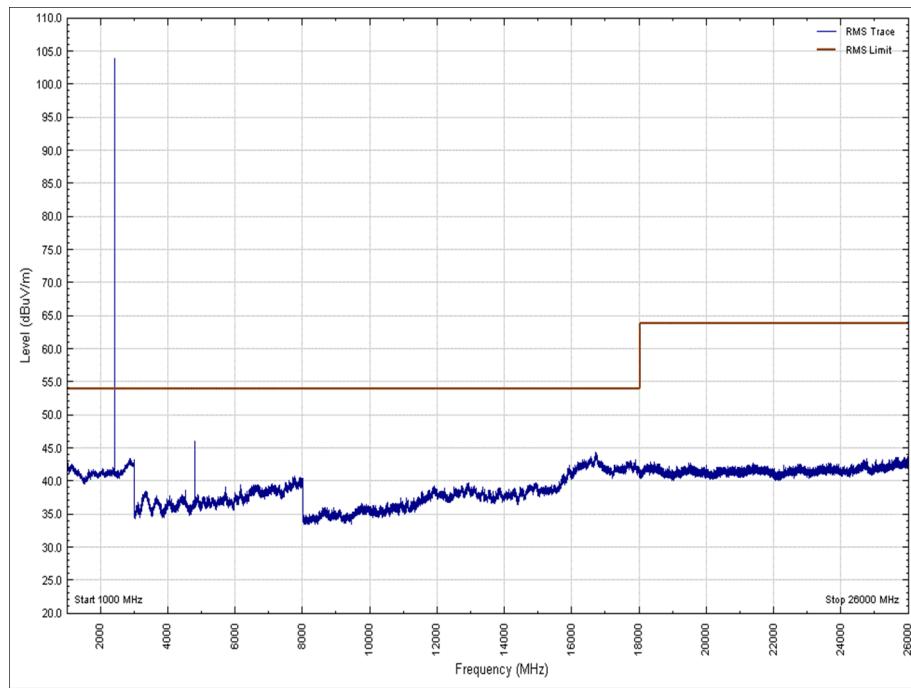


Figure 18 - 1 GHz to 26 GHz – Vertical (Average)

2441 MHz

Frequency (GHz)	Result (dB μ V/m)		Limit (dB μ V/m)		Margin (dB)	
	Peak	Average	Peak	Average	Peak	Average
4.880	47.81	46.02	74.0	54.0	26.19	7.98

Table 19 - 1 GHz to 26 GHz - Radiated

No other emissions were detected within 10 dB of the limit.

Note - The emissions seen at 2441 MHz is the EUT's intentional transmitter frequency and is therefore not subject to this test.

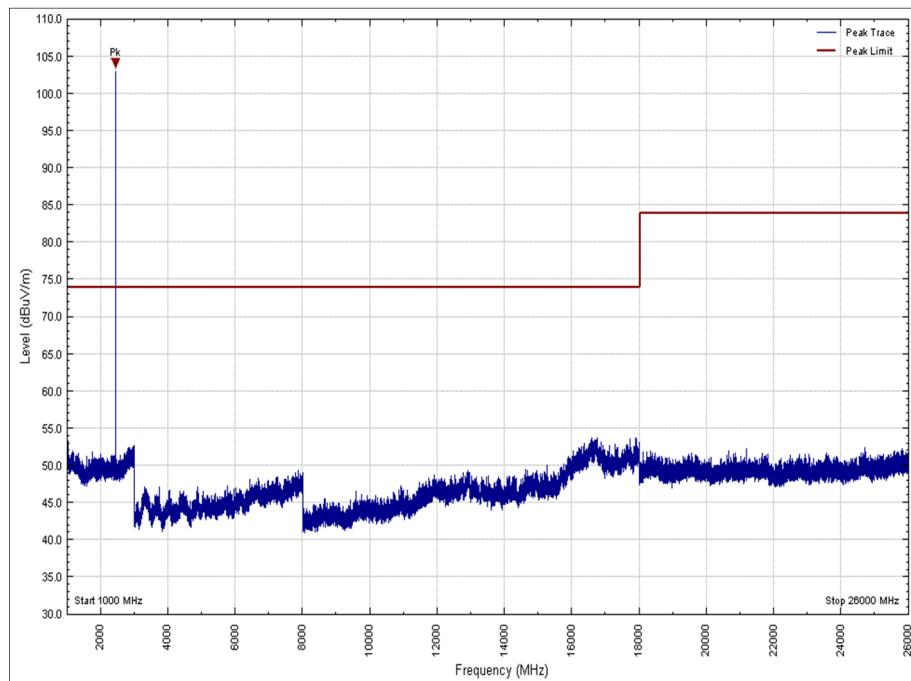


Figure 19 - 1 GHz to 26 GHz Horizontal (Peak)

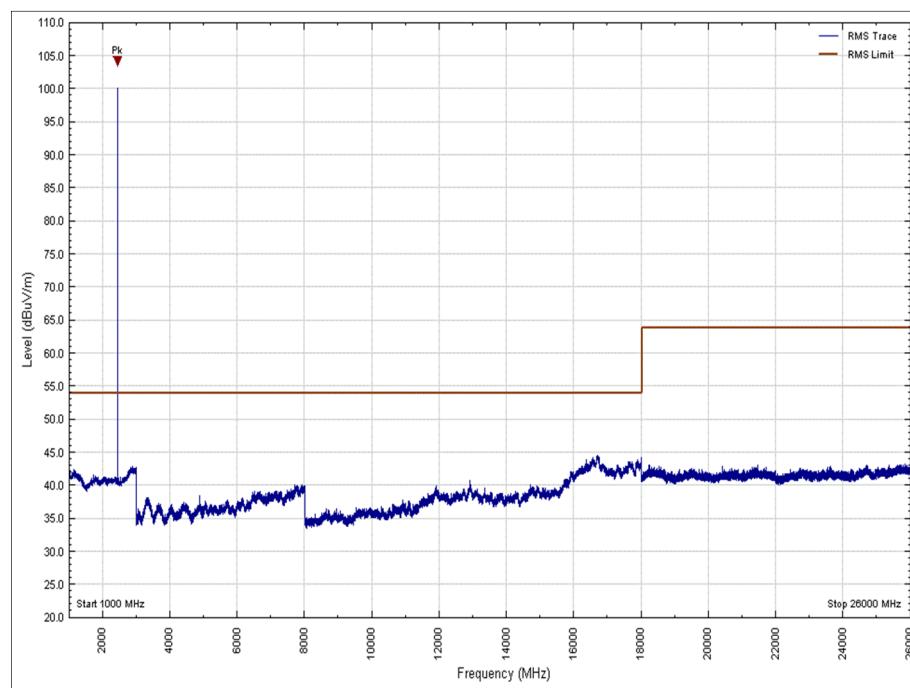


Figure 20 - 1 GHz to 26 GHz Horizontal (Average)

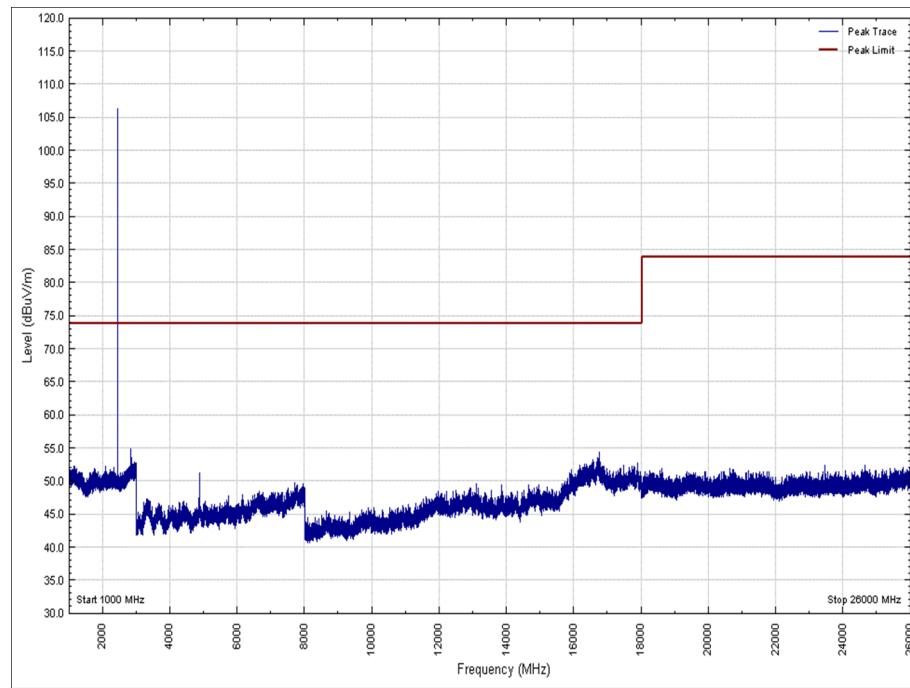


Figure 21 - 1 GHz to 26 GHz Vertical (Peak)

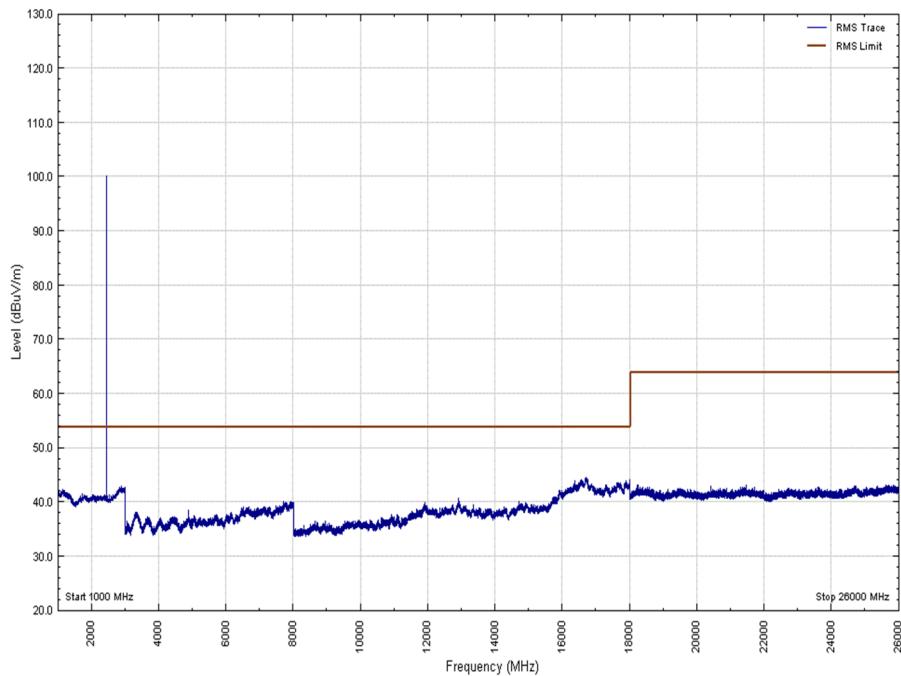


Figure 22 - 1 GHz to 26 GHz Vertical (Average)

2480 MHz

Frequency (GHz)	Result (dB μ V/m)		Limit (dB μ V/m)		Margin (dB)	
	Peak	Average	Peak	Average	Peak	Average
4.959	44.95	45.12	74.0	54.0	29.05	8.88

Table 20 - 1 GHz to 26 GHz - Radiated

No other emissions were detected within 10 dB of the limit.

Note - The emissions seen at 2480 MHz is the EUT's intentional transmitter frequency and is therefore not subject to this test.

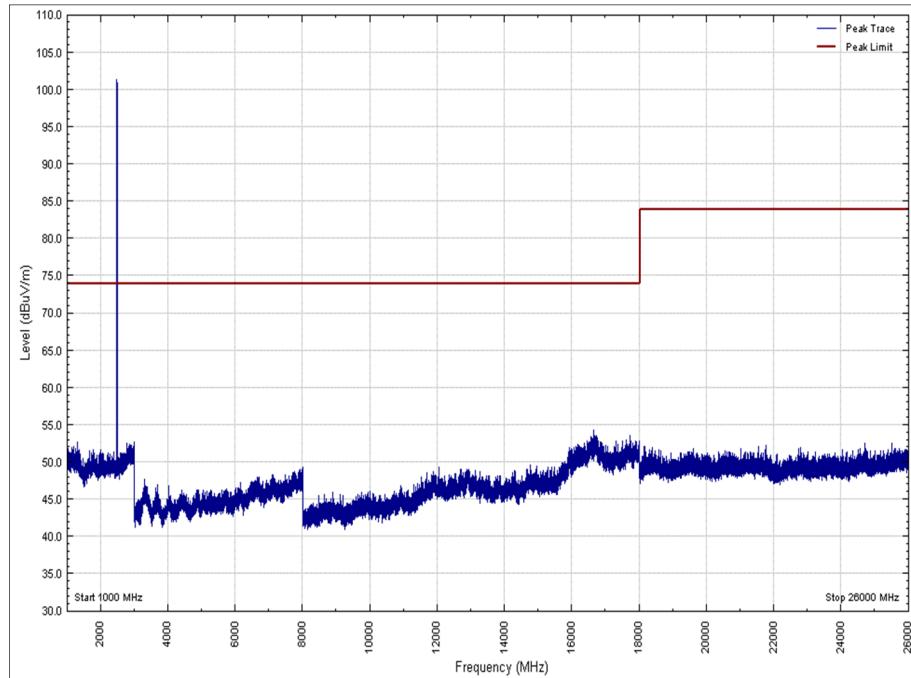


Figure 23 - 1 GHz to 26 GHz Horizontal (Peak)

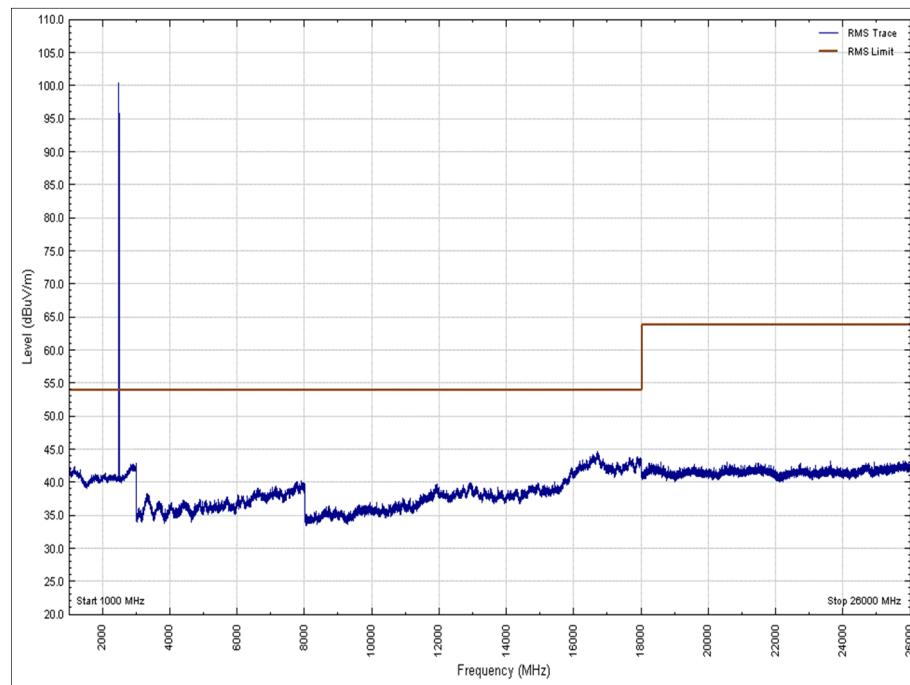


Figure 24 - 1 GHz to 26 GHz Horizontal (Average)

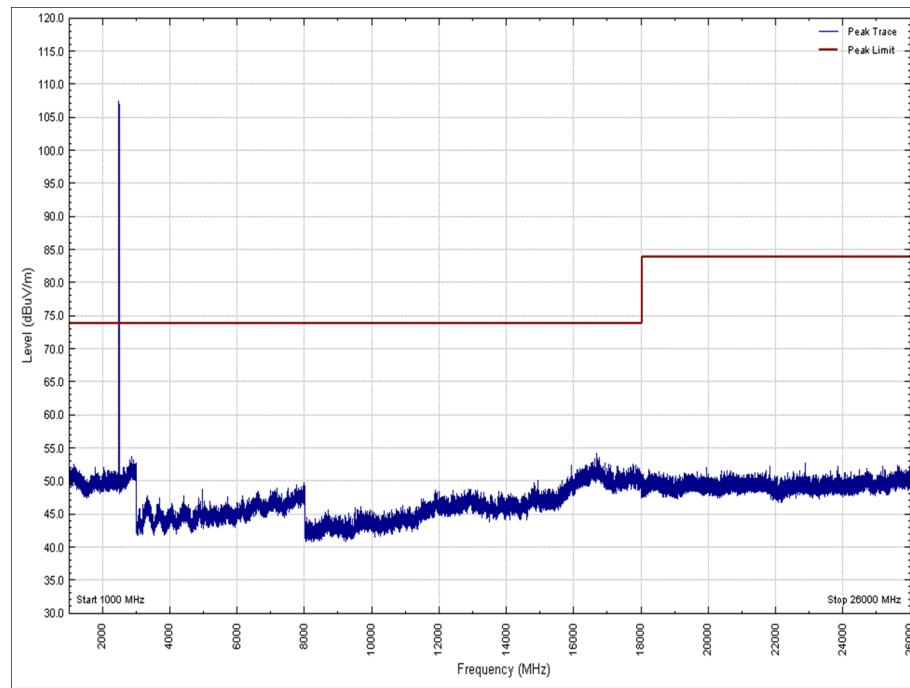


Figure 25 - 1 GHz to 26 GHz Vertical (Peak)

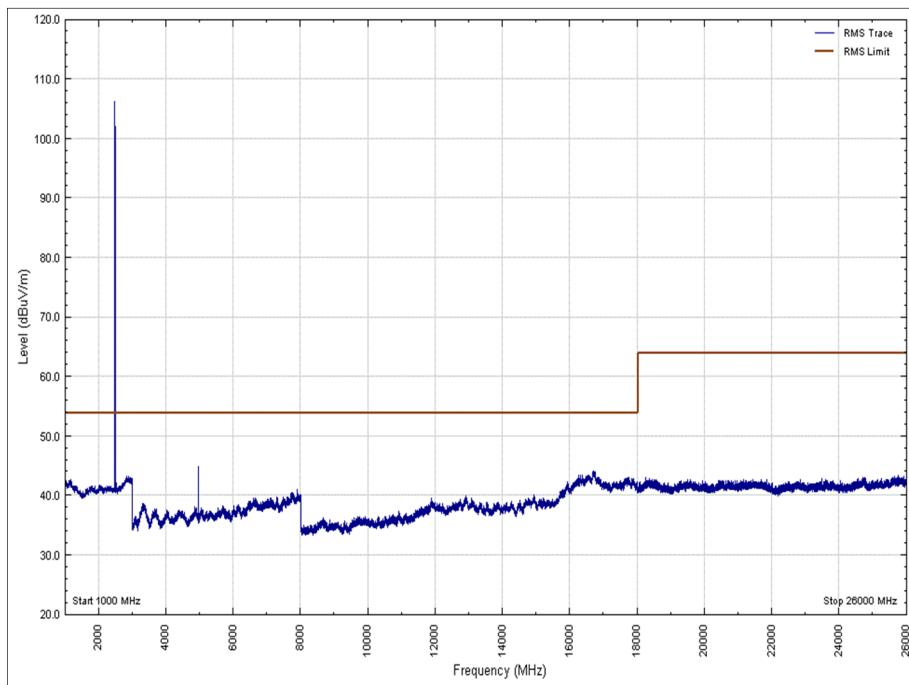


Figure 26 - 1 GHz to 26 GHz Vertical (Average)

FCC 47 CFR Part 15, Limit Clause 15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in 15.209(a)

Industry Canada RSS-247, Limit Clause 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

2.6.7 Test Location and Test Equipment Used

This test was carried out in EMC Chamber 5.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Multimeter	White Gold	WG022	190	12	24-Nov-2018
Pre-Amplifier	Agilent	8494B	-	-	O/P Mon
Hygrometer	Rotronic	HP21	4989	12	26-April-2019
Double Ridge Broadband Horn Antenna	Schwarzbeck	BBHA 9120 B	4848	12	12-Feb-2019
Antenna (Bilog)	Schaffner	CBL6143	287	24	15-May-2020
Dual Power Supply Unit	Thurlby	PL320	288	-	TU
Filter (High Pass)	Lorch	SHP7-7000-SR	566	12	10-May-2019
Pre-Amplifier	Phase One	PS04-0086	1533	12	12-Jan-2019
18GHz - 40GHz Pre-Amplifier	Phase One	PS04-0087	1534	12	02-Feb-2019
Screened Room (5)	Rainford	Rainford	1545	36	23-Jan-2021
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Antenna (Bilog)	Chase	CBL6143	2904	24	08-Aug-2019
Cable (N-N, 8m)	Rhophase	NPS-2302-8000-NPS	3248	-	O/P Mon
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	22-Nov-2018
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	09-Oct-2018
1501A 4.0M Km Km Cable	Rhophase	KPS-1501A-4000-KPS	4301	12	19-Feb-2019
1GHz to 8GHz Low Noise Amplifier	Wright Technologies	APS04-0085	4365	12	18-Oct-2018
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	06-Mar-2019
Cable	Rosenberger	LU7-071-1000	5104	6	05-Oct-2019
Cable	Rosenberger	LU7-071-2000	4528	6	O/P Mon
Cable	Rosenberger	2303-0 9.0m PNm PNm	4827	12	04-Jan-2019
EMI Receiver	Keysight Technologies	N9038A MXE	4628	12	04-July-2019
Double Ridged Waveguide Horn Antenna	ETS-Lindgren	3117	4722	12	01-Mar-2019

Mast Controller	Maturo GmbH	NCD	4810	-	TU
Tilt Antenna Mast	Maturo GmbH	TAM 4.0-P	4811	-	TU
Hygrometer	Rotronic	HP21	4989	12	26-Apr-2019
Cable (26.5GHz	Rosenberger	LU7-133-5000	5019	-	O/P Mon
Cable (40GHz	Rosenberger	LU1-001-2000	5020	-	O/P Mon

Table 21

TU - Traceability Unscheduled

O/P Mon – Output Monitored using calibrated equipment

3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
Spurious Radiated Emissions	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Restricted Band Edges	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Authorised Band Edges	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Emission Bandwidth	± 33.079 KHz
Power Spectral Density	± 3.2 dB
Maximum Conducted Output Power	± 3.2 dB

Table 22