



MEASUREMENT REPORT GSM/GPRS/EDGE/WCDMA

Applicant Name:

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

07/27/2018-09/25/2018

Test Site/Location:

PCTEST Lab. Morgan Hill, CA, USA

Test Report Serial No.:

1C1806220015-02.BCG

FCC ID:	BCGA1934
IC:	579C-A1934
APPLICANT:	Apple Inc.

Application Type:

Certification

Model/HVIN:

A1934, A1979

EUT Type:

Tablet Device

FCC Classification:

PCS Licensed Transmitter (PCB)

FCC Rule Part(s):

22, 24, & 27

ISED Specification:


RSS-132, RSS-133, RSS-139

Test Procedure(s):

ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President





FCC ID: BCGA1934	PCTEST Engineering Laboratory, Inc.		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device		Page 1 of 112

T A B L E O F C O N T E N T S

1.0	INTRODUCTION	4
1.1	Scope	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Antenna Description	5
2.4	Test Support Equipment.....	6
2.5	Test Configuration	6
2.6	Software and Firmware	6
2.7	EMI Suppression Device(s)/Modifications	6
3.0	DESCRIPTION OF TESTS	7
3.1	Evaluation Procedure	7
3.2	Cellular - Base Frequency Blocks	7
3.3	Cellular - Mobile Frequency Blocks	7
3.4	PCS - Base Frequency Blocks	7
3.5	PCS - Mobile Frequency Blocks.....	8
3.6	AWS - Base Frequency Blocks	8
3.7	AWS - Mobile Frequency Blocks	8
3.8	Radiated Measurements	9
4.0	MEASUREMENT UNCERTAINTY	10
5.0	TEST EQUIPMENT CALIBRATION DATA	11
6.0	SAMPLE CALCULATIONS	12
7.0	TEST RESULTS.....	13
7.1	Summary	13
7.2	Occupied Bandwidth	14
7.3	Spurious and Harmonic Emissions at Antenna Terminal	19
7.4	Band Edge Emissions at Antenna Terminal	45
7.5	Peak-Average Ratio	54
7.6	Radiated Power (ERP/EIRP).....	59
7.6.1	Port A Radiated Power (ERP/EIRP).....	61
7.6.2	Port B Radiated Power (ERP/EIRP).....	63
7.6.3	Port C Radiated Power (ERP/EIRP).....	65
7.6.4	Port D Radiated Power (ERP/EIRP).....	66
7.7	Radiated Spurious Emissions Measurements	67
7.7.1	ANT 3 (Port A) Radiated Spurious Emissions Measurements	69
7.7.2	ANT 4b (Port A) Radiated Spurious Emissions Measurements	73
7.7.3	ANT 1 (Port B) Radiated Spurious Emissions Measurements	79
7.7.4	ANT 2b (Port B) Radiated Spurious Emissions Measurements	83
7.7.5	ANT 4a (Port C) Radiated Spurious Emissions Measurements	89
7.7.6	ANT 2a (Port D) Radiated Spurious Emissions Measurements	95
7.8	Frequency Stability / Temperature Variation	101
8.0	CONCLUSION.....	112

FCC ID: BCGA1934	 PCTEST [®] ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 2 of 112

MEASUREMENT REPORT

GSM/GPRS/EDGE/WCDMA

Mode	FCC Rule Part	Tx Frequency (MHz)	ERP		EIRP		Emission Designator
			Max. Power (W)	Max. Power (dBm)	Max. Power (W)	Max. Power (dBm)	
GPRS850	22H	824.2 - 848.8	0.449	26.52	0.736	28.67	241KGXW
EDGE850	22H	824.2 - 848.8	0.154	21.88	0.253	24.03	241KG7W
WCDMA850	22H	826.4 - 846.6	0.188	22.75	0.309	24.90	4M10F9W
WCDMA1700	27	1712.4 - 1752.6			0.223	23.49	4M09F9W
GPRS1900	24E	1850.2 - 1909.8			0.646	28.10	245KGXW
EDGE1900	24E	1850.2 - 1909.8			0.207	23.15	246KG7W
WCDMA1900	24E	1852.4 - 1907.6			0.219	23.40	4M09F9W

EUT Overview

FCC ID: BCGA1934	 MEASUREMENT REPORT <small>(CERTIFICATION)</small>			Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 3 of 112	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Morgan Hill, CA 95037, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device		Page 4 of 112

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA1934**. The test data contained in this report pertains only to the emissions due to the EUT's 2G/3G licensed transmitters.

Test Device Serial No.: DLXX4014KR4X, DLXX5005KR4V

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE, HDR4, HDR8)

2.3 Antenna Description

Following antenna was used for the testing.

Frequency [MHz]	Antennas			
	Port A	Port B	Port C	Port D
820-960	ANT 3	ANT 1	N/A	
1700-1800	ANT 4b	ANT 2b	ANT 4a	ANT 2a
1820-2100				

Table 2-1. Antennas vs Ports

Frequency [MHz]	Antenna Gain (dBi)			
	Port A	Port B	Port C	Port D
820-960	-0.6	-2.9	N/A	
1700-1800	-2.0	-2.0	-2.4	-1.1
1820-2100	-2.1	-2.1	-1.8	0.0

Table 2-2. Antenna Peak Gain

FCC ID: BCGA1934	 PCTEST® ENGINEERING LABORATORY, INC.			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device			

2.4 Test Support Equipment

1	Apple MacBook w/AC/DC Adapter	Model: A1398 Model: A1435	S/N: C2QKP008F6F3 S/N: C04325505K1F288BG
2	Apple USB-C Cable	Model: Chimp	S/N: 300C44
3	USB-C Cable w/ AC Adapter	Model: A146 Model: A1720	S/N: N/A S/N: C3D8257A2EPGKVP2C
4	USB-C to 3.5mm Aux Adapter	Model: A2049	S/N: DWH413100GJJKLT12
5	DC Power Supply	Model: KPS3010D	S/N: N/A

Table 2-3. Test Support Equipment Used

2.5 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

There are two vendors of the WiFi/Bluetooth radio modules, variant 1 and variant 2. Both radio modules have the same mechanical outline, same on-board antenna matching circuit, identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. The worst case configuration was found between the two variants. The EUT was also investigated with and without charger.

The emissions below 1GHz and above 18GHz were tested with the highest transmitting power channel and the worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

2.6 Software and Firmware

The test was conducted with firmware version 16B64 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: BCGA1934	 PCTEST <small>ENGINEERING LABORATORY, INC.</small>			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device			


3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....**None**

3.2 Cellular - Base Frequency Blocks

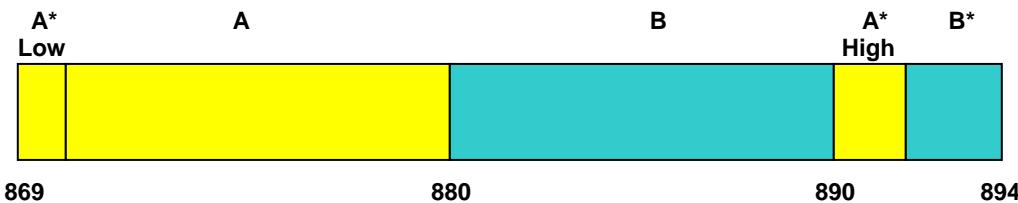


BLOCK 1: 869 – 880 MHz (A* Low + A)

BLOCK 2: 880 – 890 MHz (B)

BLOCK 3: 890 – 891.5 MHz (A* High)

BLOCK 4: 891.5 – 894 MHz (B*)

3.3 Cellular - Mobile Frequency Blocks

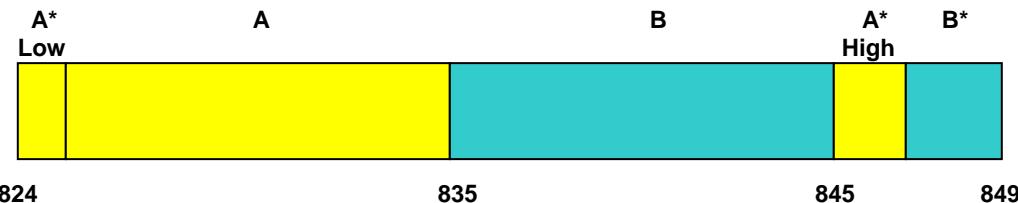


BLOCK 1: 824 – 835 MHz (A* Low + A)

BLOCK 2: 835 – 845 MHz (B)

BLOCK 3: 845 – 846.5 MHz (A* High)

BLOCK 4: 846.5 – 849 MHz (B*)

3.4 PCS - Base Frequency Blocks

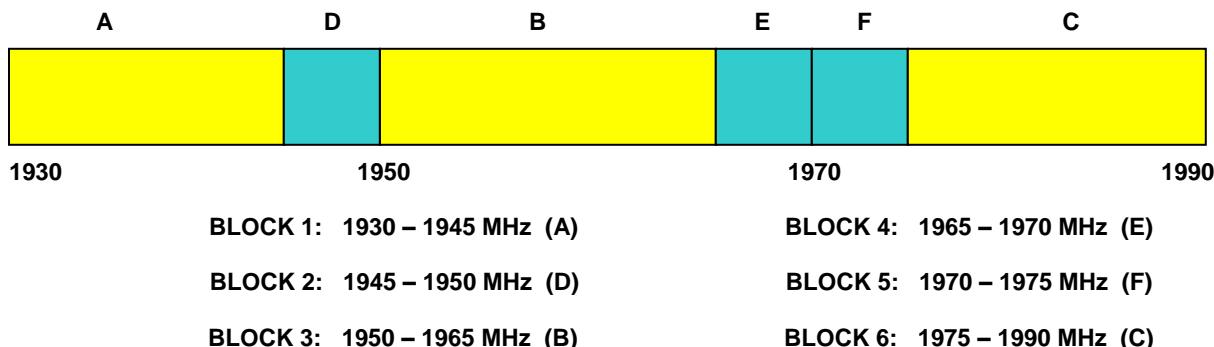

FCC ID: BCGA1934	 PCTEST® ENGINEERING LABORATORY, INC.	
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device


MEASUREMENT REPORT (CERTIFICATION)

Approved by:
Quality Manager


Page 7 of 112

V 8.4 08/10/2018


3.5 PCS - Mobile Frequency Blocks

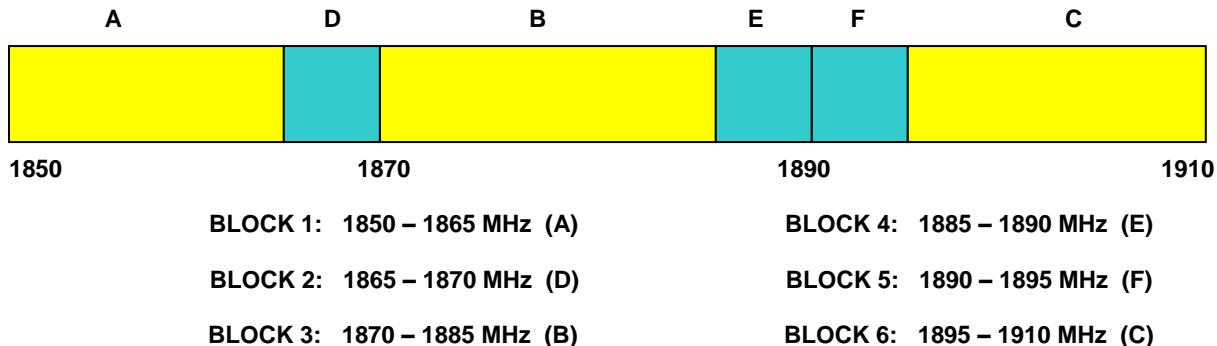

3.6 AWS - Base Frequency Blocks

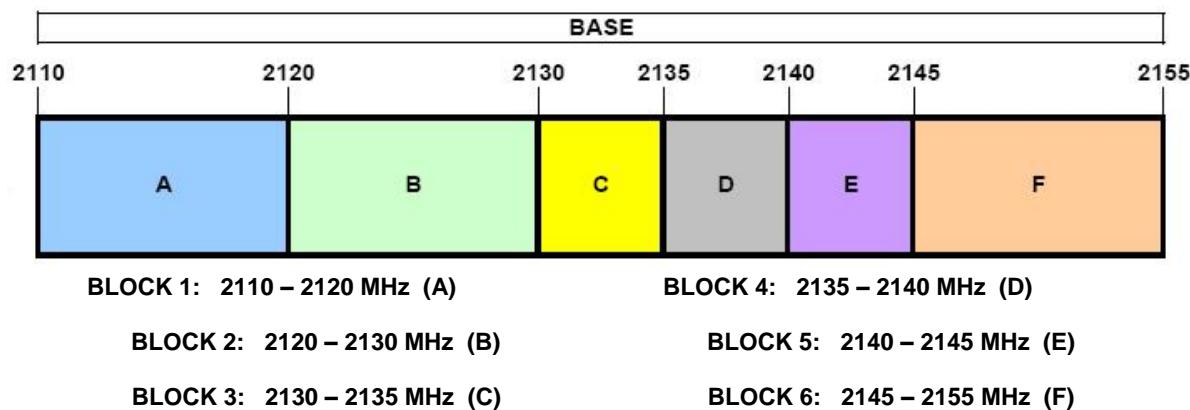

3.7 AWS - Mobile Frequency Blocks

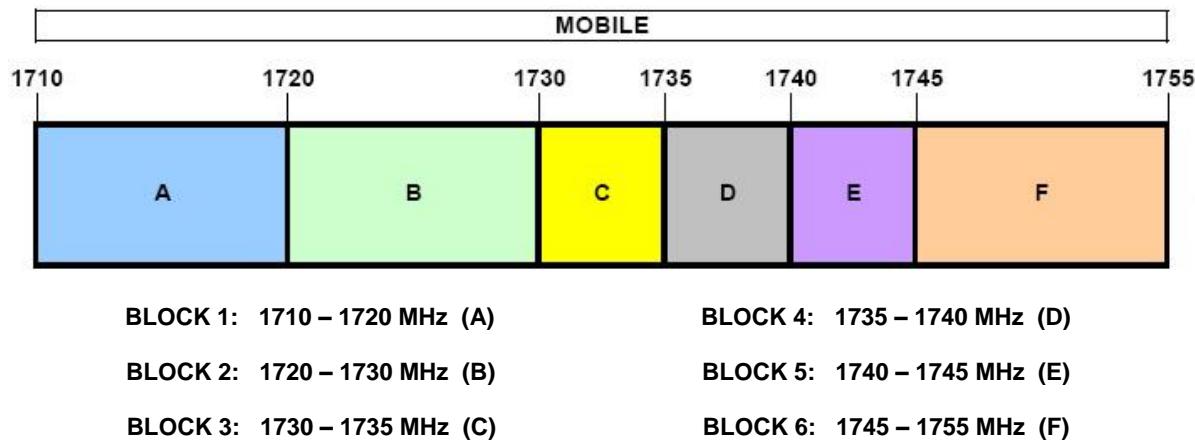

FCC ID: BCGA1934	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device		Page 8 of 112

3.8 Radiated Measurements

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Per the guidelines of KDB 412172 D01 v01r01, radiated power levels are measured using the following formula:

$$\text{ERP or EIRP} = P_T + G_T - L_c$$

Where P_T is the transmitter output power, expressed in dBm, G_T is the gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP), and L_c signal attenuation in the connecting cable between the transmitter and antenna in dB.

Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [\text{dBm}] = P_g [\text{dBm}] - \text{cable loss } [\text{dB}] + \text{antenna gain } [\text{dBd/dBi}]$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g [\text{dBm}] - \text{cable loss } [\text{dB}]$. The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power } [\text{Watts}])$.

Radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-E-2016.

FCC ID: BCGA1934	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 9 of 112

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: BCGA1934	 PCTEST® <small>ENGINEERING LABORATORY, INC.</small>		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 10 of 112	

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Keysight Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	2/27/2018	Annual	2/27/2019	MY49430244
Maturo	NCD/264/205616	Mast/TT controller	N/A	N/A	N/A	NCD_264
Rohde & Schwarz	ESW44	EMI Test Receiver	12/20/2017	Annual	12/20/2018	101668
Rohde & Schwarz	ESW44	EMI Test Receiver	11/16/2017	Annual	11/16/2018	101570
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	2/6/2018	Annual	2/6/2019	101619
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	6/11/2018	Annual	6/11/2019	161675
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	4/16/2018	Annual	4/16/2019	161617
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	12/8/2017	Annual	12/8/2018	164175
Rohde & Schwarz	SFUNIT-RX	Shielded Filter Unit	7/5/2018	Annual	7/5/2019	102137
Rohde & Schwarz	SFUNIT-RX	Shielded Filter Unit	12/11/2017	Annual	12/11/2018	102136
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	6/11/2018	Annual	6/11/2019	100051
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	1/25/2018	Annual	1/25/2019	102333
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	3/13/2018	Annual	3/13/2019	T058601-02
Rohde & Schwarz	HL562E	Ultra Broadband Antenna (30MHz - 6GHz)	6/8/2018	Annual	6/8/2019	100810
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Antenna(400MHz-18GHz)	11/13/2017	Annual	11/13/2018	101057
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Antenna (400MHz-18GHz)	11/29/2017	Annual	11/29/2018	101063
ESPEC	SU-241	Temperature Chamber	8/10/2018	Annual	8/10/2019	92009574

Table 5-1. Test Equipment

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: BCGA1934	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 11 of 112	

6.0 SAMPLE CALCULATIONS

GPRS Emission Designator

Emission Designator = 250KGXW

GPRS BW = 250 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 250KG7W

EDGE BW = 250 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M16F9W

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: BCGA1934	 PCTEST® <small>ENGINEERING LABORATORY, INC.</small>		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device		Page 12 of 112

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCGA1934
 FCC Classification: PCS Licensed Transmitter (PCB)
 Mode(s): GSM/GPRS/EDGE/WCDMA

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	RSS-Gen (4.6.1) RSS-133(2.3) RSS-139(2.3)	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
2.1051 22.917(a) 24.238(a) 27.53(h)	RSS-132(5.5) RSS-133(6.5) RSS-139(6.6)	Conducted Band Edge / Spurious Emissions	> $43 + \log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions		PASS	Sections 7.3, 7.4
24.232(d)	RSS-132(5.4) RSS-133(6.4) RSS-139(6.5)	Peak-Average Ratio	< 13 dB		PASS	Section 7.5
2.1046	RSS-132(5.4) RSS-133(4.1) RSS-139(4.1)	Transmitter Conducted Output Power	N/A		PASS	RF Exposure Report
2.1055 22.355 24.235 27.54	RSS-132(5.3) RSS-133(6.3) RSS-139(6.4)	Frequency Stability	< 2.5 ppm (Part 22) Emission must remain in band (Part 24, 27)		PASS	Section 7.8
22.913(a)(5)	RSS-132(5.4)	Effective Radiated Power	< 7 Watts max. ERP	RADIATED	PASS	Section 7.6
24.232(c)	RSS-133(6.4)	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS	Section 7.6
27.50(d)(4)	RSS-139(6.5)	Equivalent Isotropic Radiated Power	< 1 Watts max. EIRP		PASS	Section 7.6
2.1053 22.917(a) 24.238(a) 27.53(h)	RSS-132(5.5) RSS-133(6.5) RSS-139(6.6)	Radiated Spurious Emissions	> $43 + \log_{10}(P[\text{Watts}])$ for all out-of-band emissions		PASS	Section 7.7

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "2G/3G Automation," Version 3.9.

FCC ID: BCGA1934	 PCTEST® <small>ENGINEERING LABORATORY, INC.</small>	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 13 of 112

7.2 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup


Test Notes

1. All ports were tested and only the worst case data were reported.
2. Refer to Table 2-1 Section 2.3 of this test report for correlation between Antennas and Ports.


FCC ID: BCGA1934	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 14 of 112




FCC ID: BCGA1934	PCTEST ENGINEERING LABORATORY, INC.			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device			

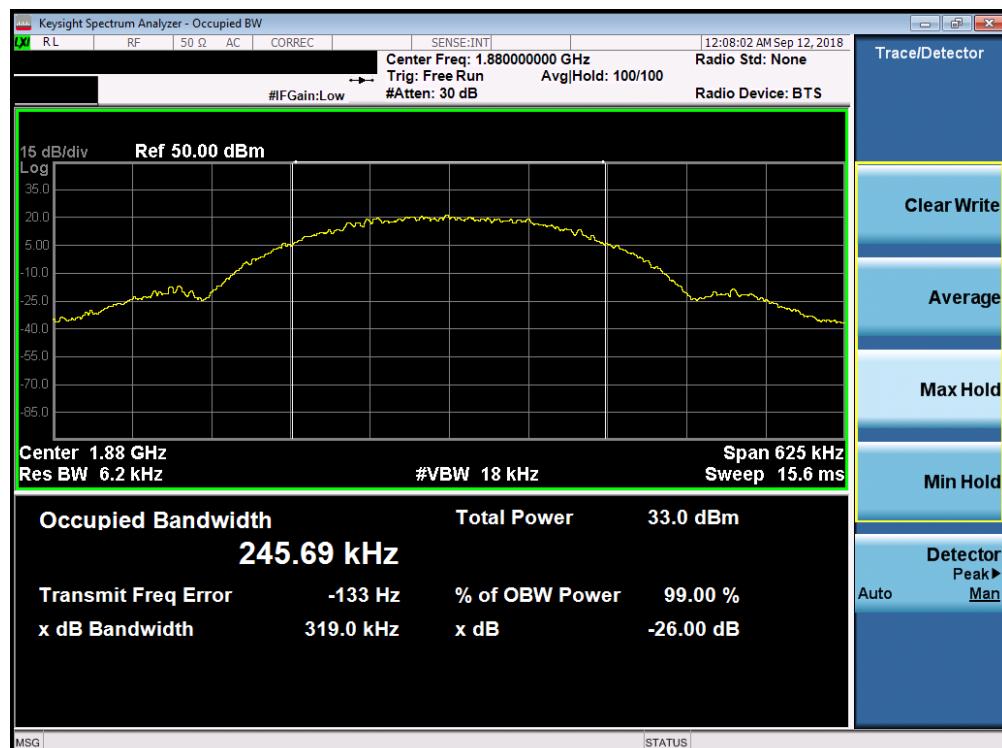
Plot 7-3. Occupied Bandwidth Plot (PCS GPRS Mode)

Plot 7-4. Occupied Bandwidth Plot (EDGE1900 Mode)

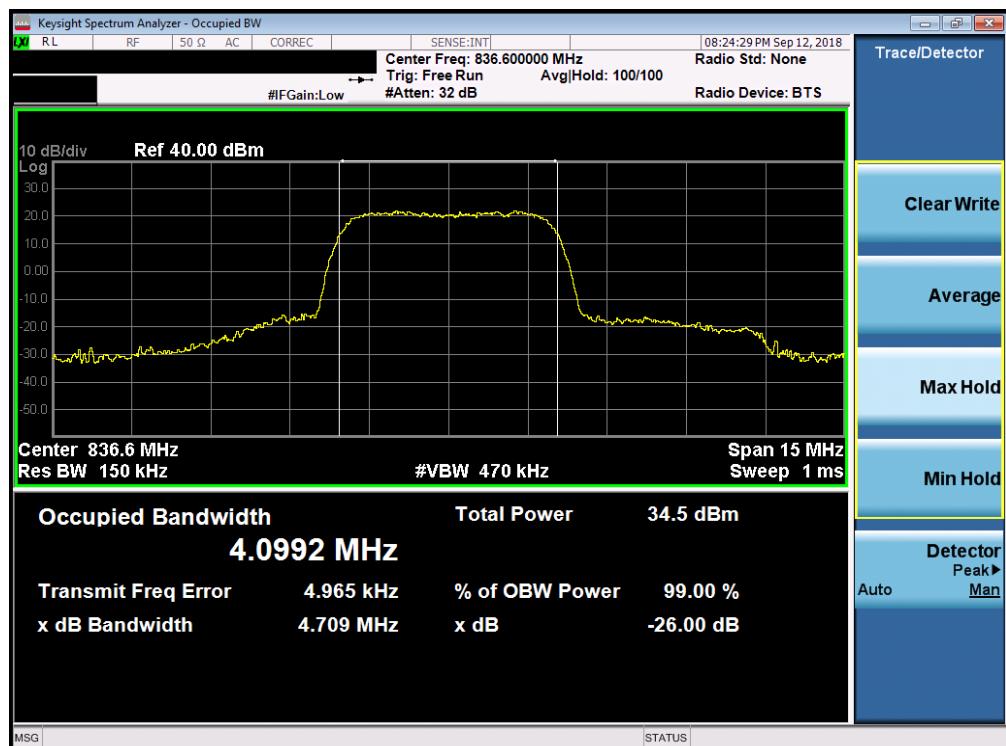FCC ID: BCGA1934	 PCTEST® ENGINEERING LABORATORY, INC.			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device			

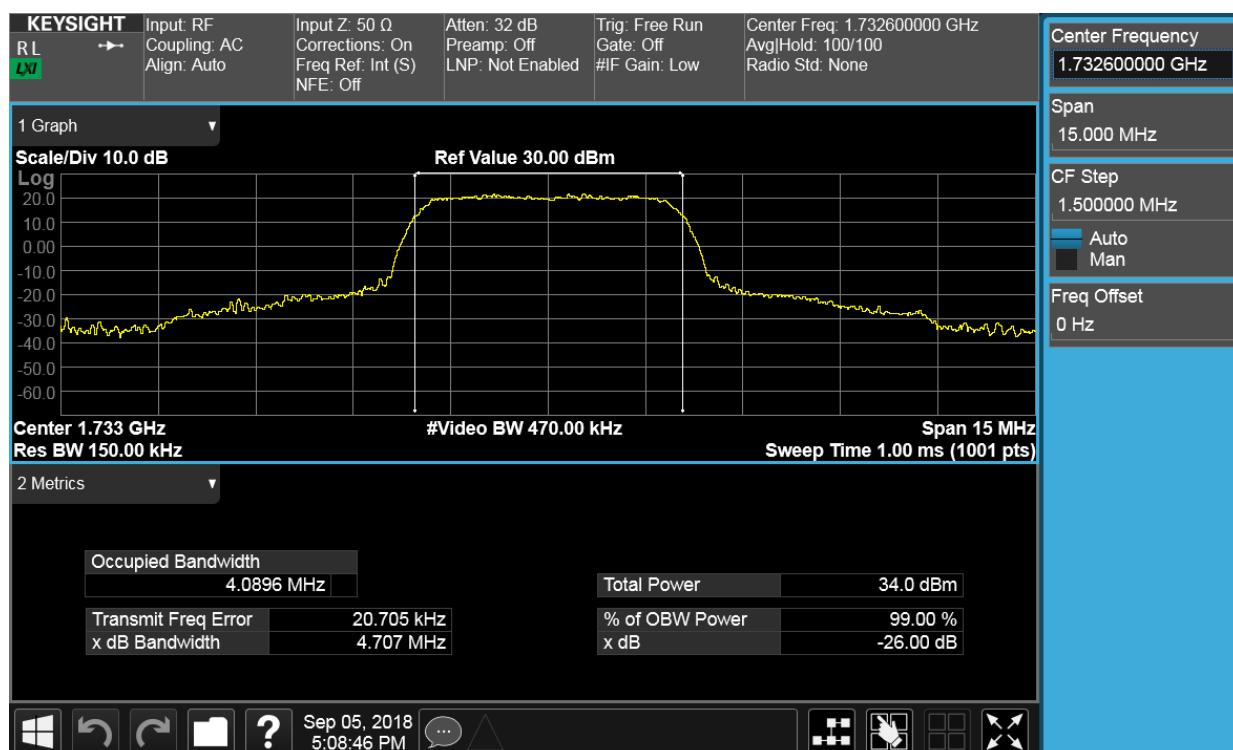


Plot 7-5. Occupied Bandwidth Plot (Cellular WCDMA Mode)



Plot 7-6. Occupied Bandwidth Plot (AWS WCDMA Mode)

FCC ID: BCGA1934		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 17 of 112

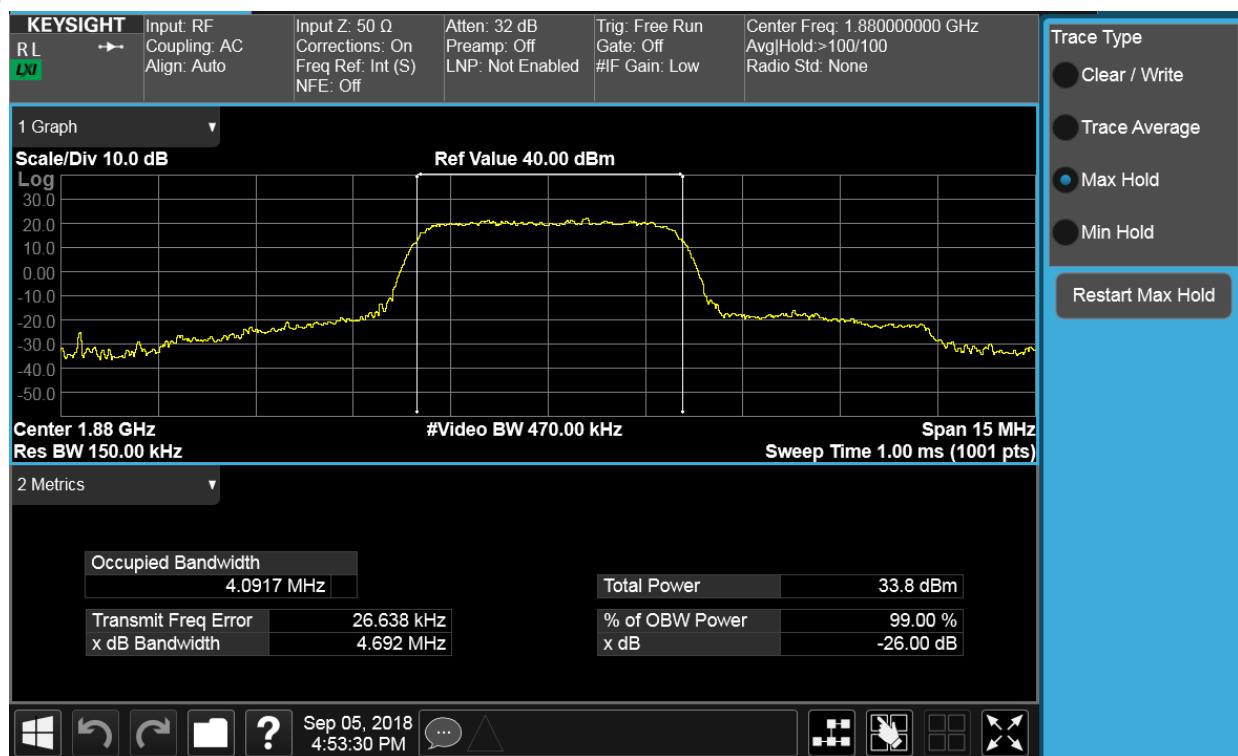

FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device		Page 18 of 112

7.3 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{\text{Watts}})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz for Cell, 20GHz for AWS, 20GHz for PCS (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

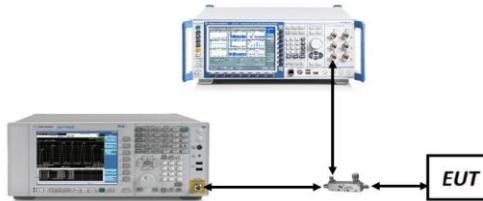



Figure 7-2. Test Instrument & Measurement Setup

Test Notes


1. Per 24.238(b), 27.53(h)(3), and RSS-133(6.5), RSS-139(6.5), compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 1MHz, and 100 kHz or greater for Part 22 and RSS-132 measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
2. All ports were tested and only the worst case data were reported.
3. Refer to Table 2-1 Section 2.3 of this test report for correlation between Antennas and Ports.

FCC ID: BCGA1934	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 19 of 112

Cellular GPRS Mode

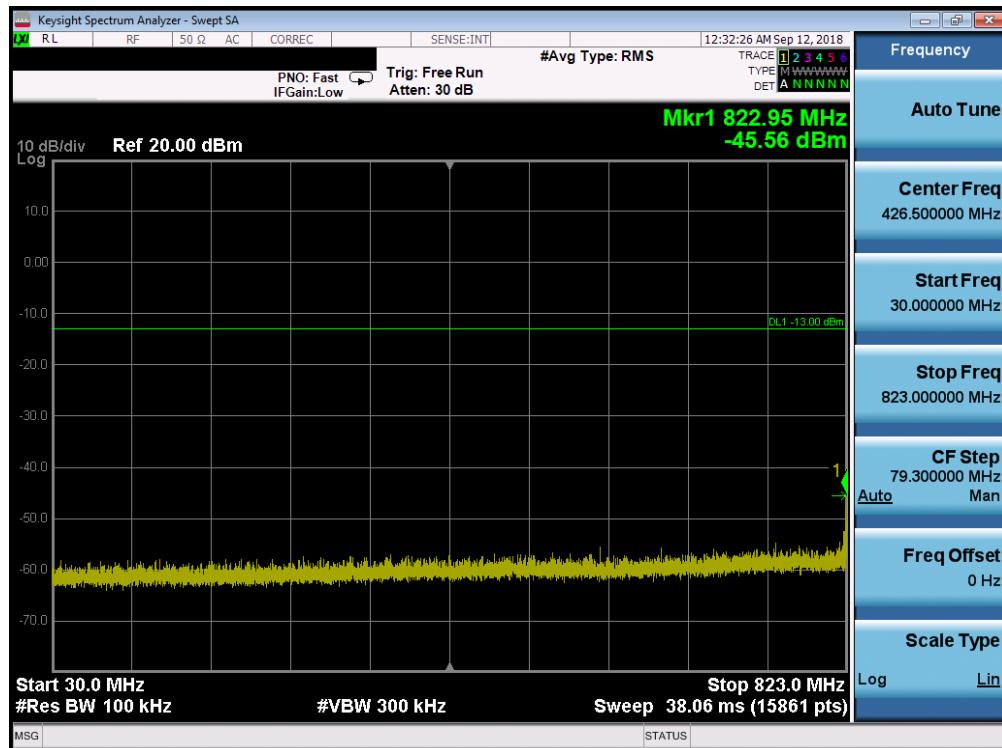


Plot 7-8. Conducted Spurious Plot (Cellular GPRS Mode - Low Channel)

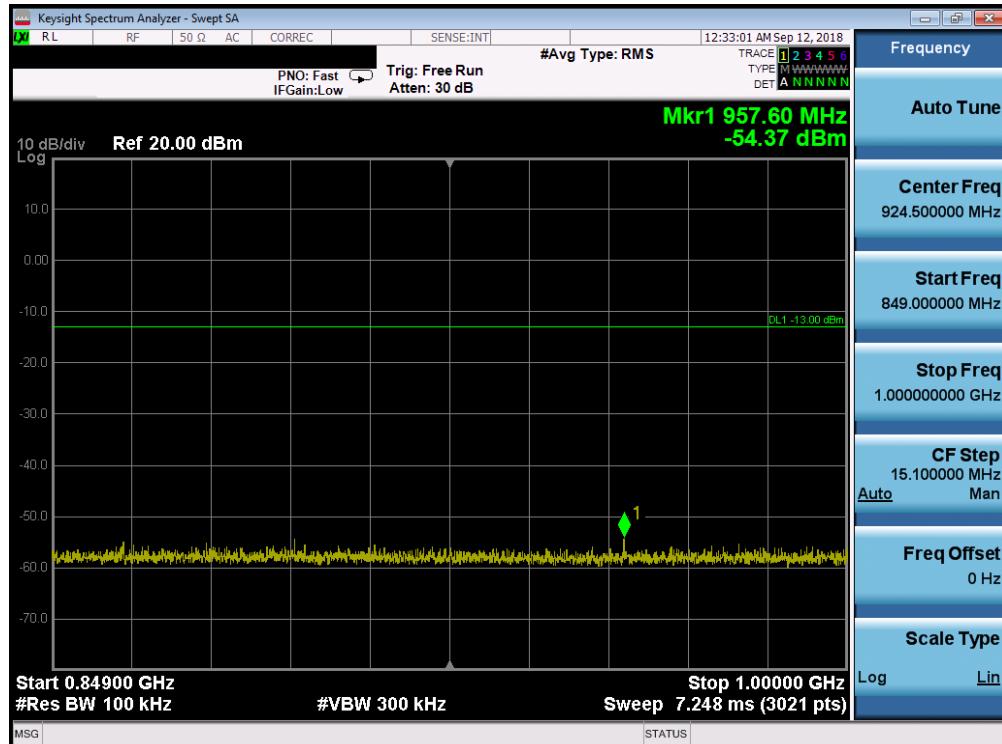


Plot 7-9. Conducted Spurious Plot (Cellular GPRS Mode - Low Channel)

FCC ID: BCGA1934	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 20 of 112	

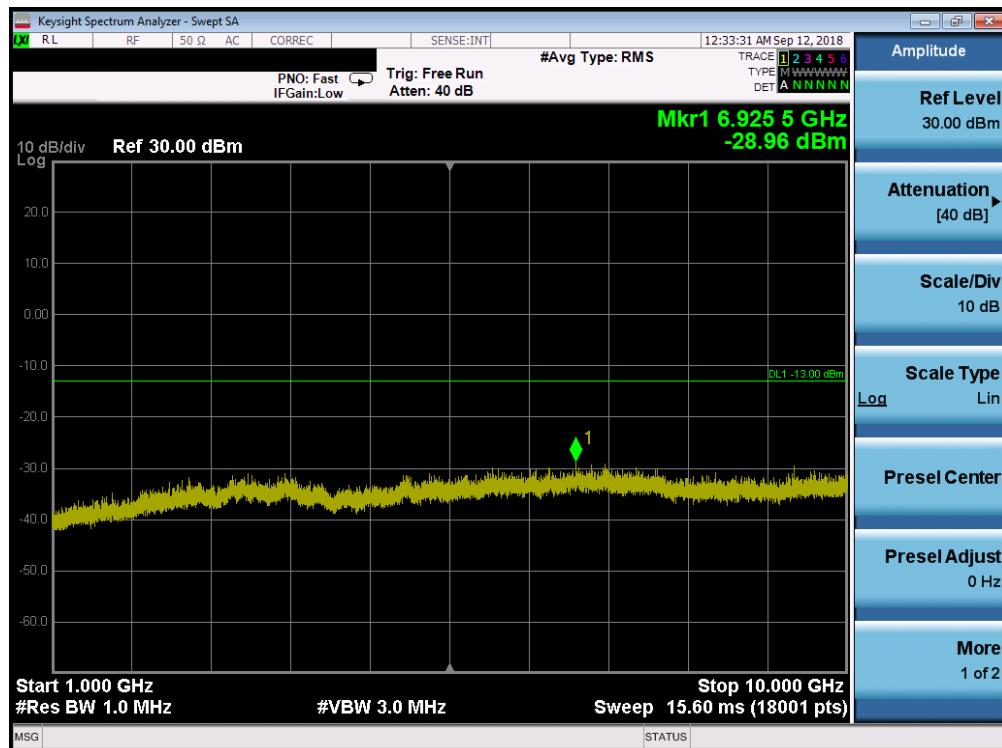


Plot 7-10. Conducted Spurious Plot (Cellular GPRS Mode - Low Channel)

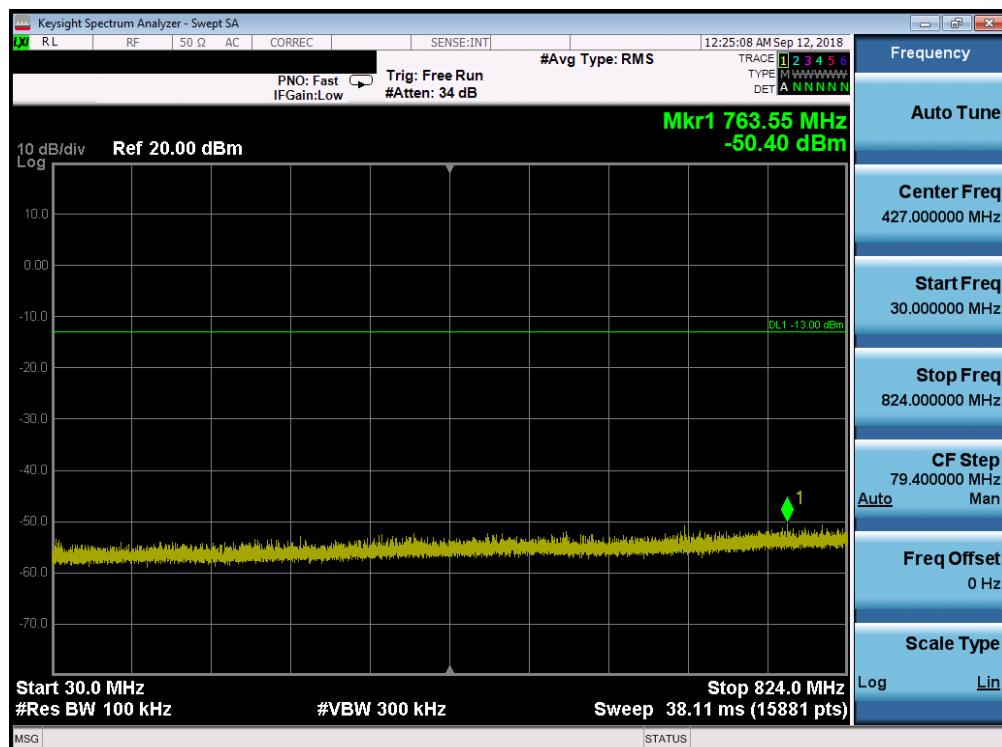


Plot 7-11. Conducted Spurious Plot (Cellular GPRS Mode - Mid Channel)

FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 21 of 112	

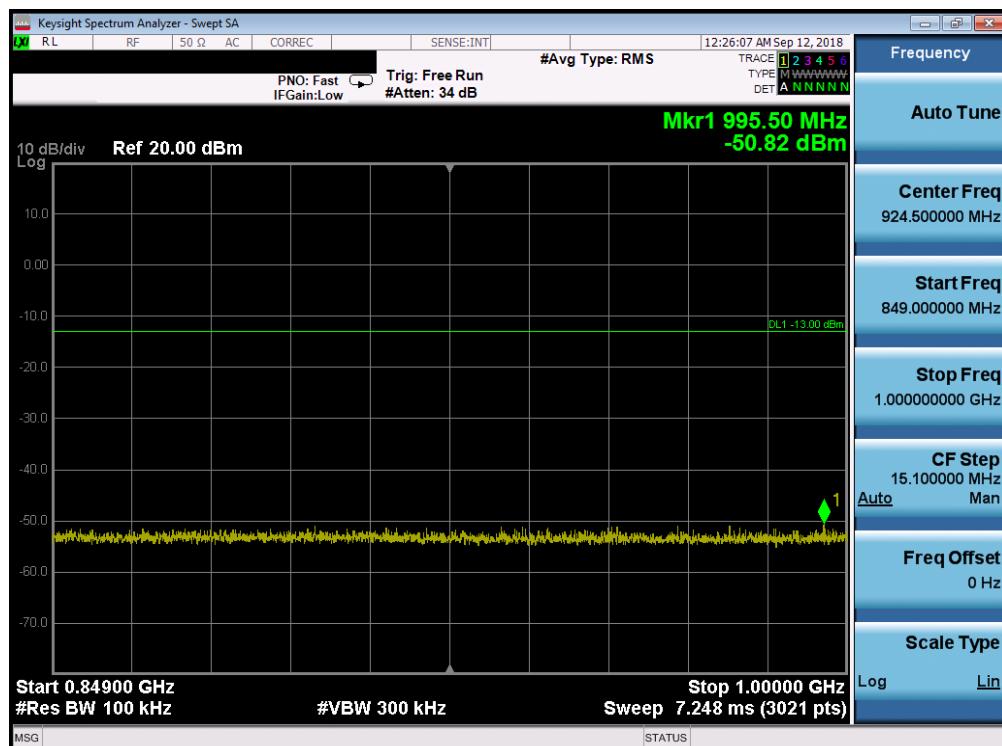


Plot 7-12. Conducted Spurious Plot (Cellular GPRS Mode - Mid Channel)

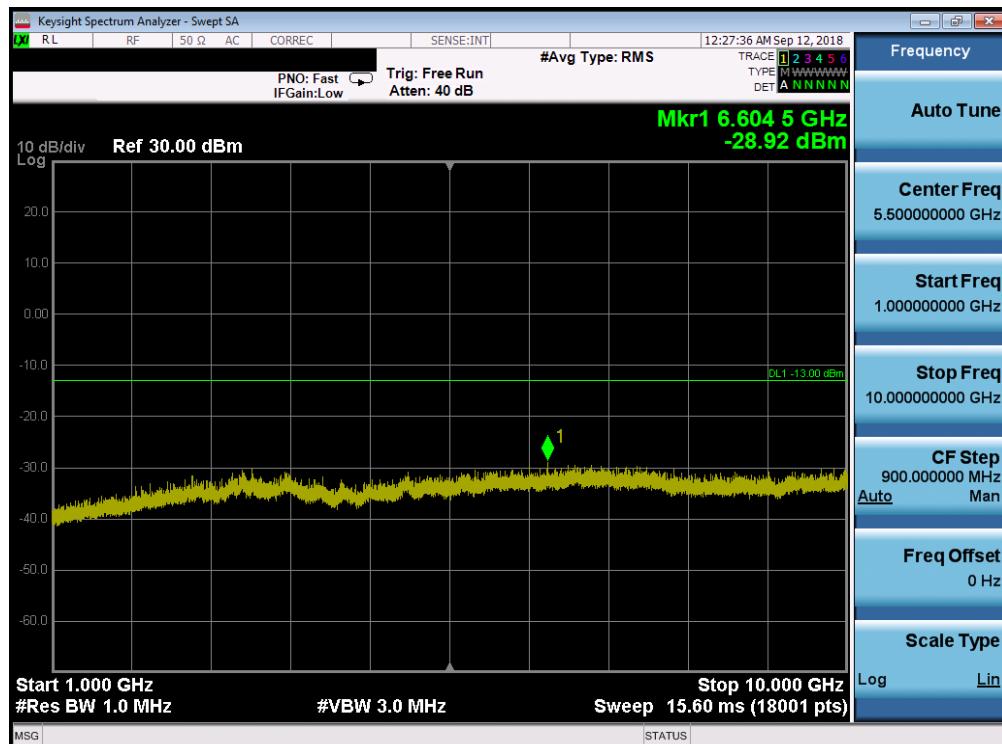


Plot 7-13. Conducted Spurious Plot (Cellular GPRS Mode - Mid Channel)

FCC ID: BCGA1934	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 22 of 112

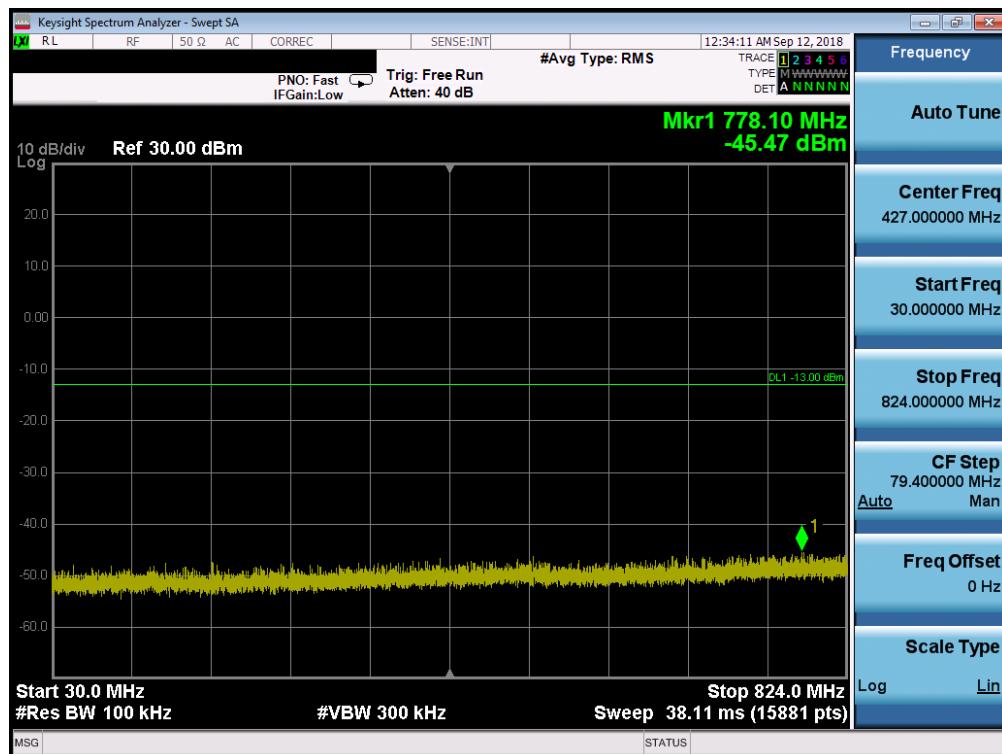


Plot 7-14. Conducted Spurious Plot (Cellular GPRS Mode - High Channel)

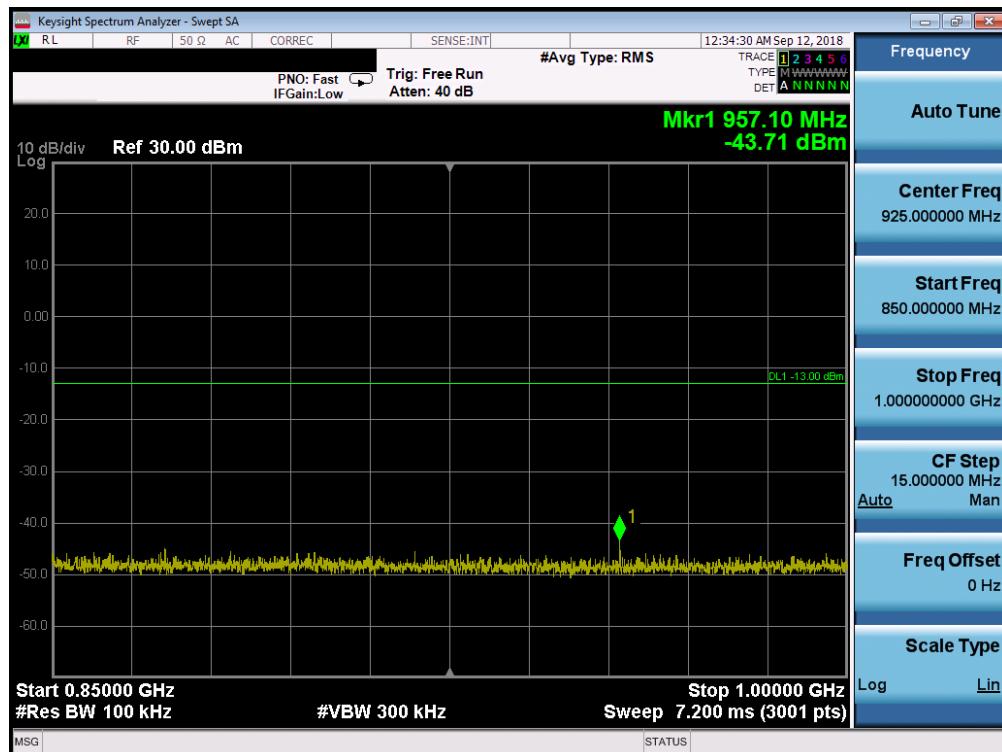

Plot 7-15. Conducted Spurious Plot (Cellular GPRS Mode - High Channel)


FCC ID: BCGA1934	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 23 of 112

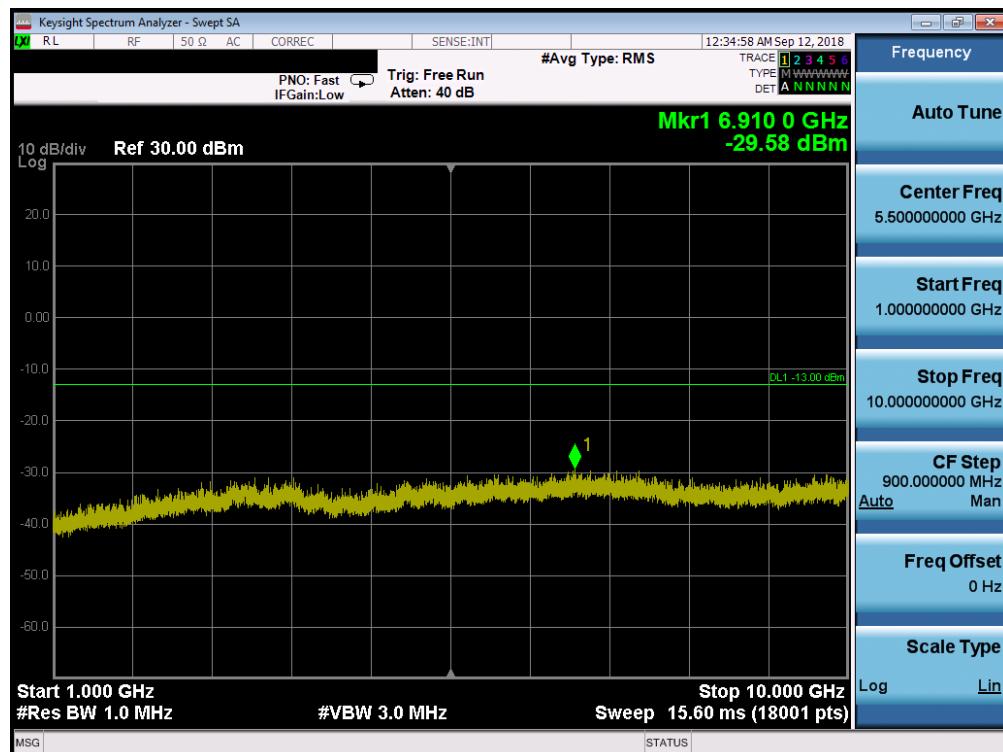


Plot 7-16. Conducted Spurious Plot (Cellular GPRS Mode - High Channel)

FCC ID: BCGA1934	PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 24 of 112

PCS GPRS Mode

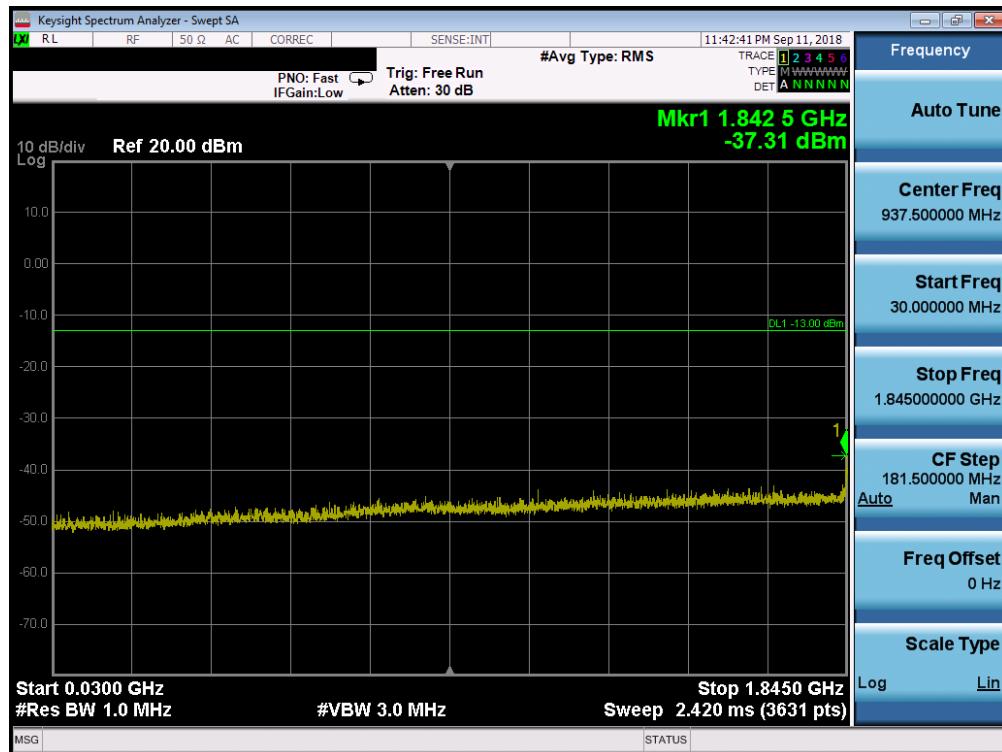


Plot 7-17. Conducted Spurious Plot (PCS GPRS Mode - Low Channel)

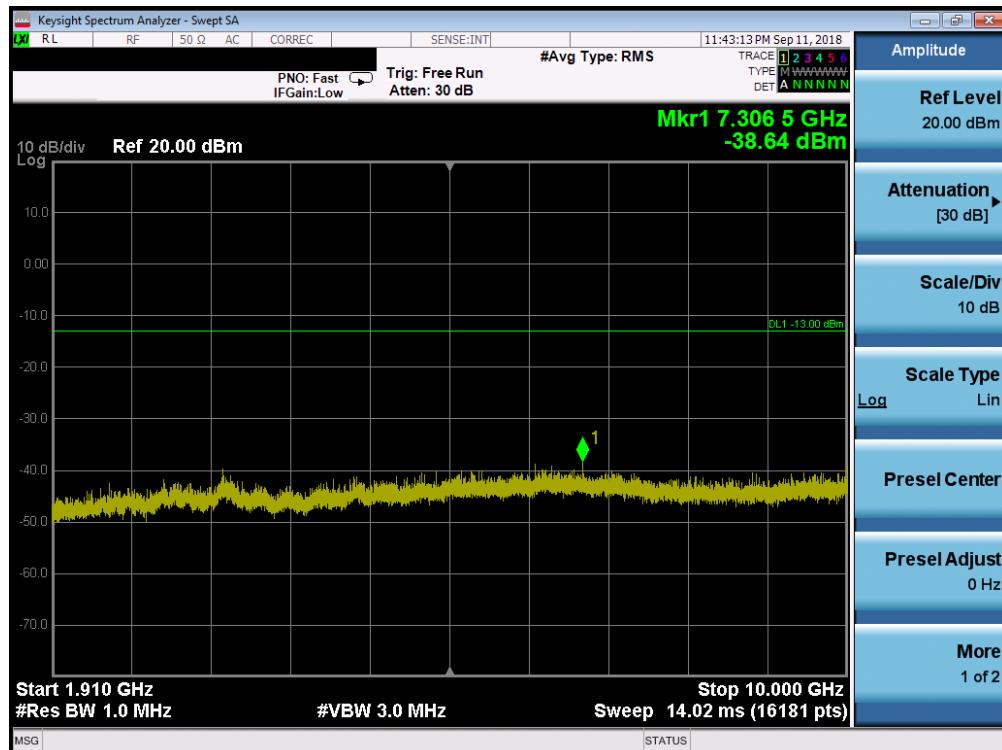


Plot 7-18. Conducted Spurious Plot (PCS GPRS Mode - Low Channel)

FCC ID: BCGA1934		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device		Page 25 of 112


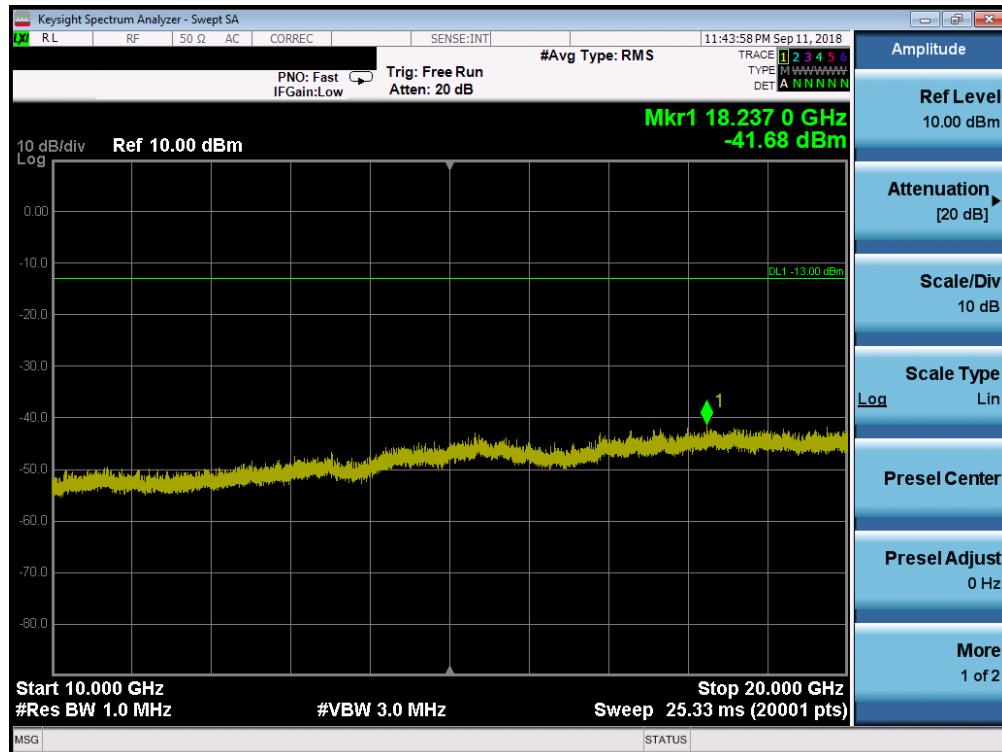


Plot 7-19. Conducted Spurious Plot (PCS GPRS Mode - Low Channel)

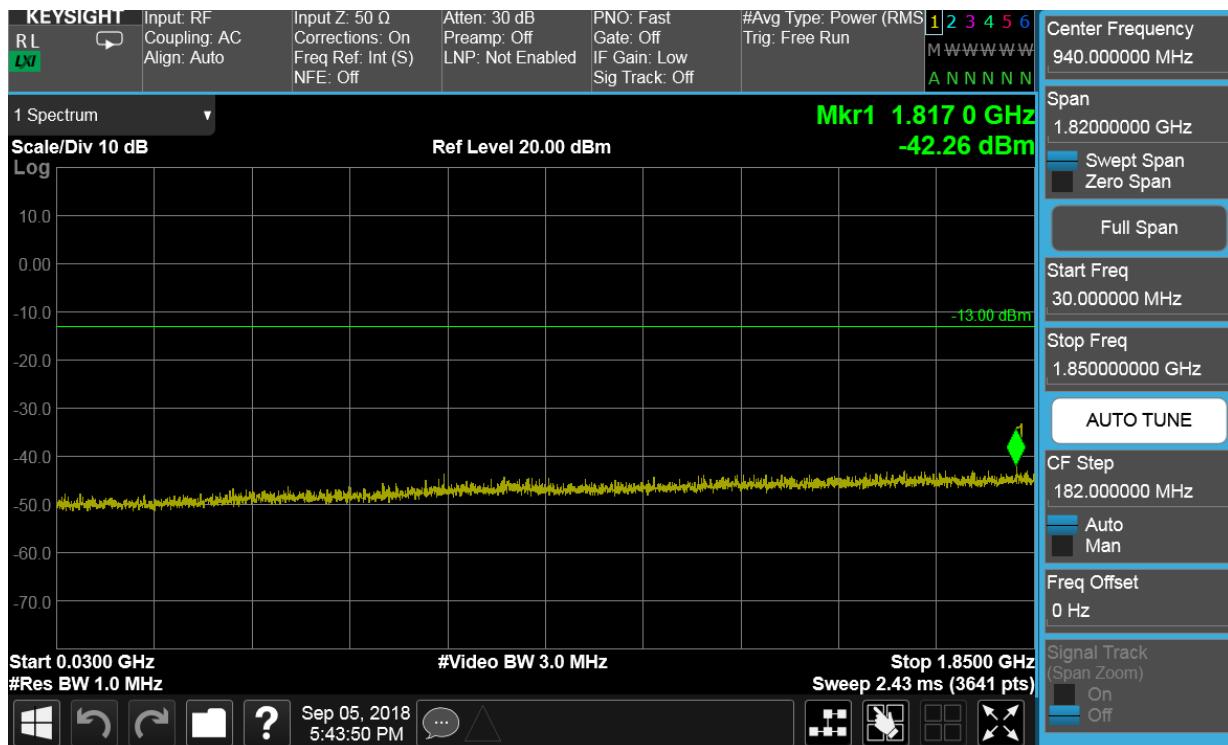


Plot 7-20. Conducted Spurious Plot (PCS GPRS Mode - Mid Channel)


FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 26 of 112

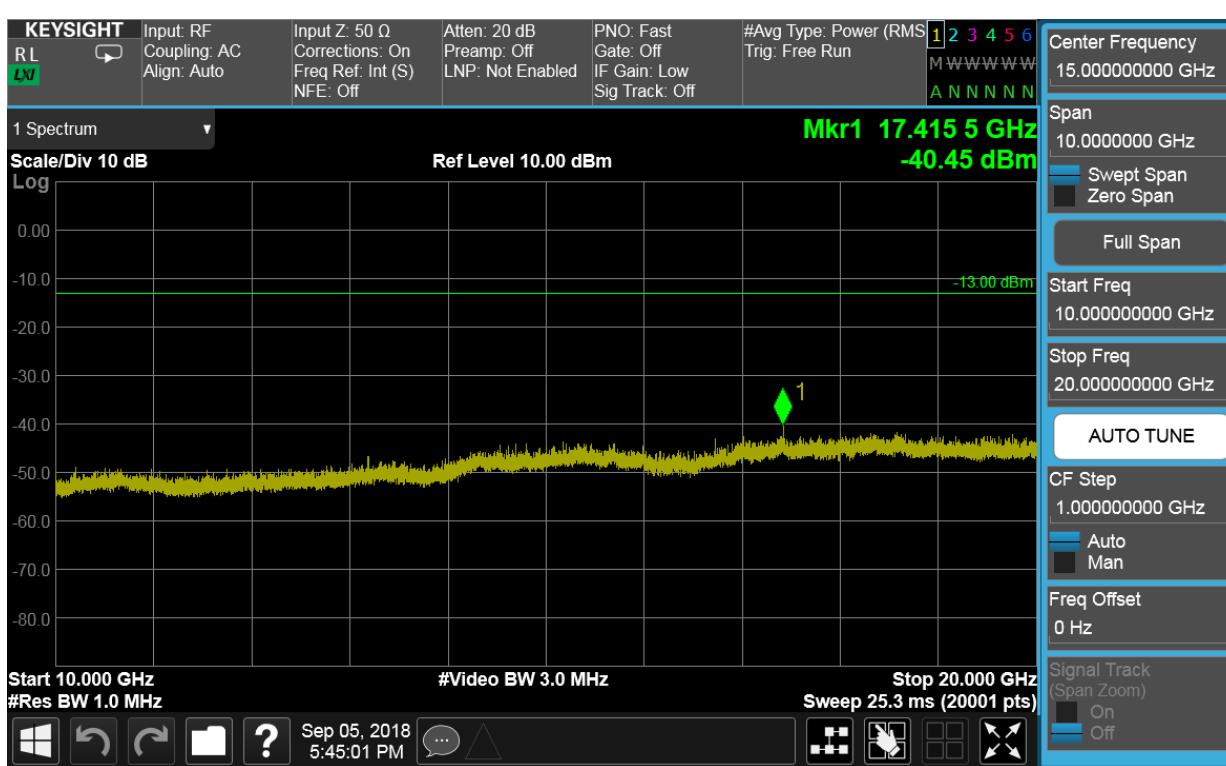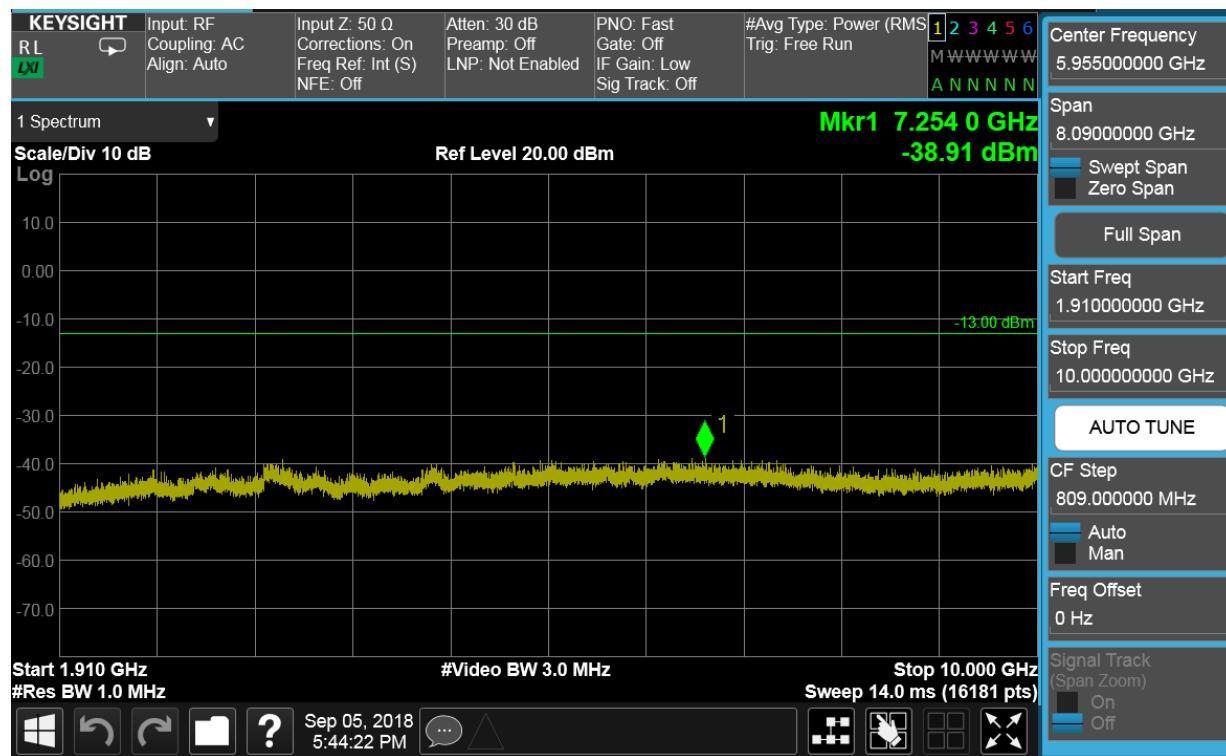

FCC ID: BCGA1934	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device		Page 27 of 112

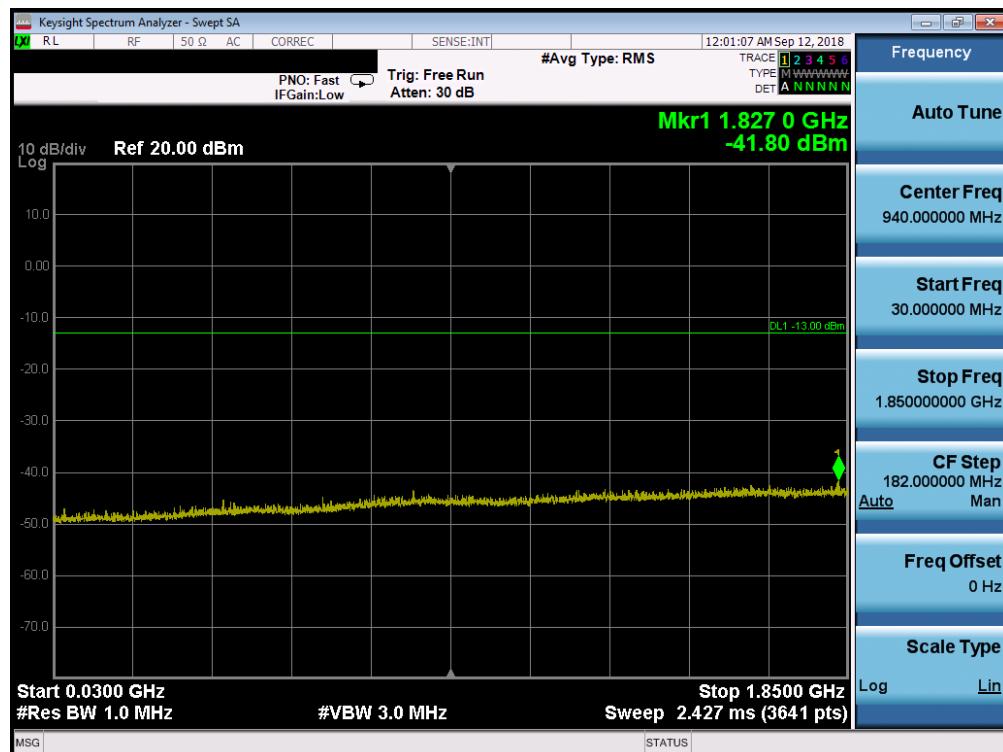


Plot 7-23. Conducted Spurious Plot (PCS GPRS Mode - High Channel)

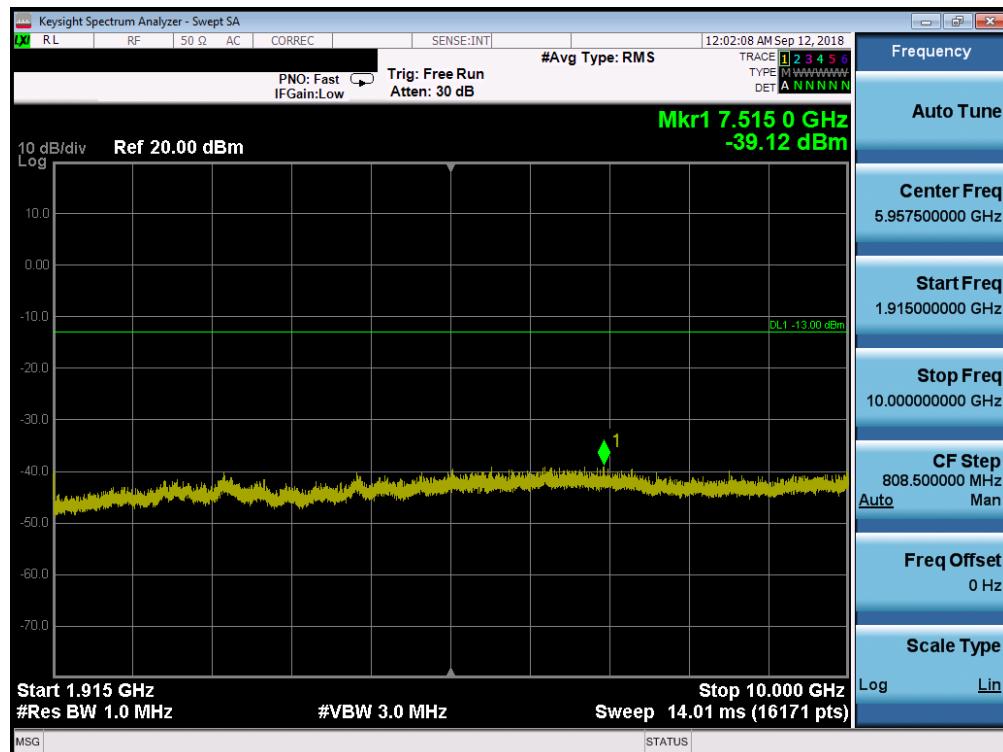

Plot 7-24. Conducted Spurious Plot (PCS GPRS Mode - High Channel)


FCC ID: BCGA1934		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device		Page 28 of 112

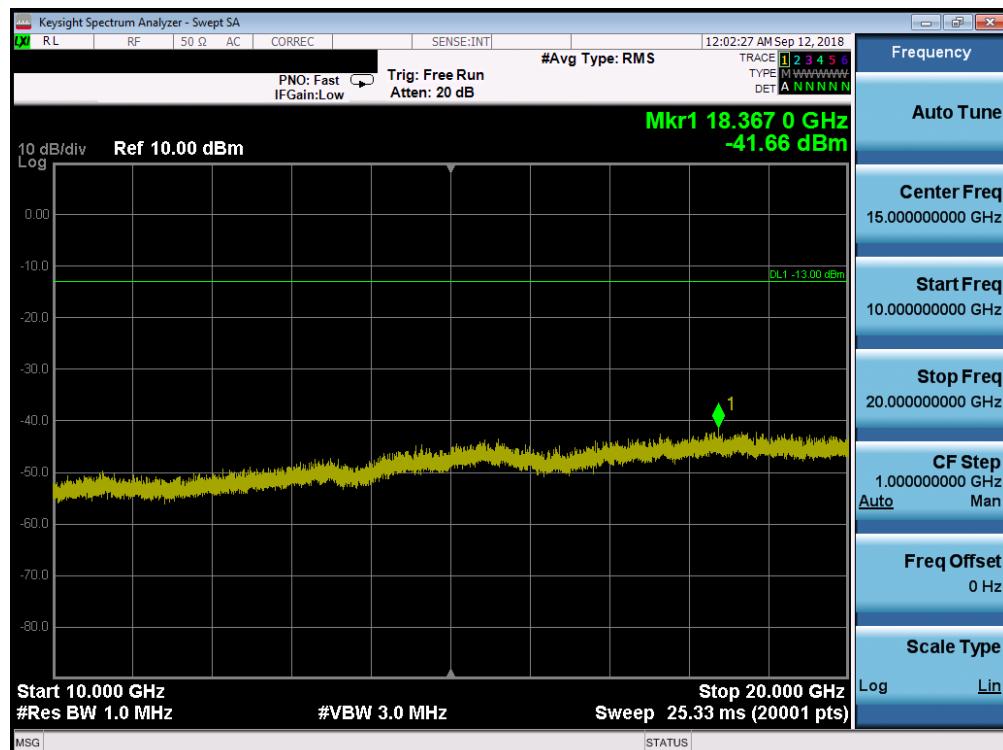

Plot 7-25. Conducted Spurious Plot (PCS GPRS Mode - High Channel)

FCC ID: BCGA1934	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 29 of 112	

Cellular WCDMA Mode


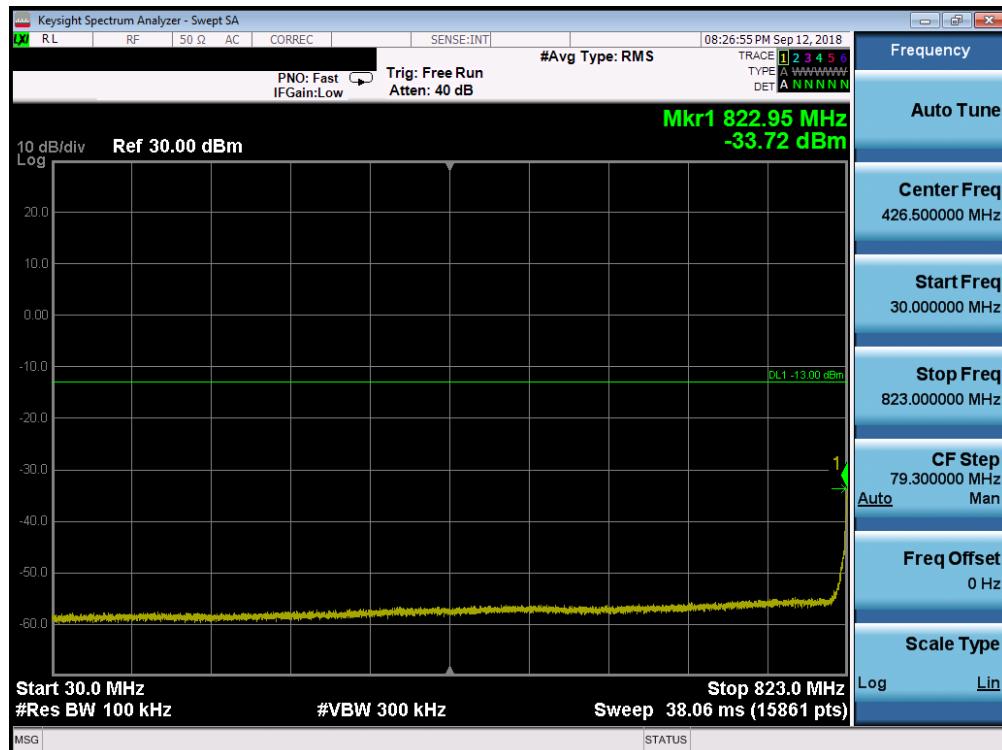


Plot 7-26. Conducted Spurious Plot (Cellular WCDMA Mode - Low Channel)




Plot 7-27. Conducted Spurious Plot (Cellular WCDMA Mode - Low Channel)


FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device		Page 30 of 112

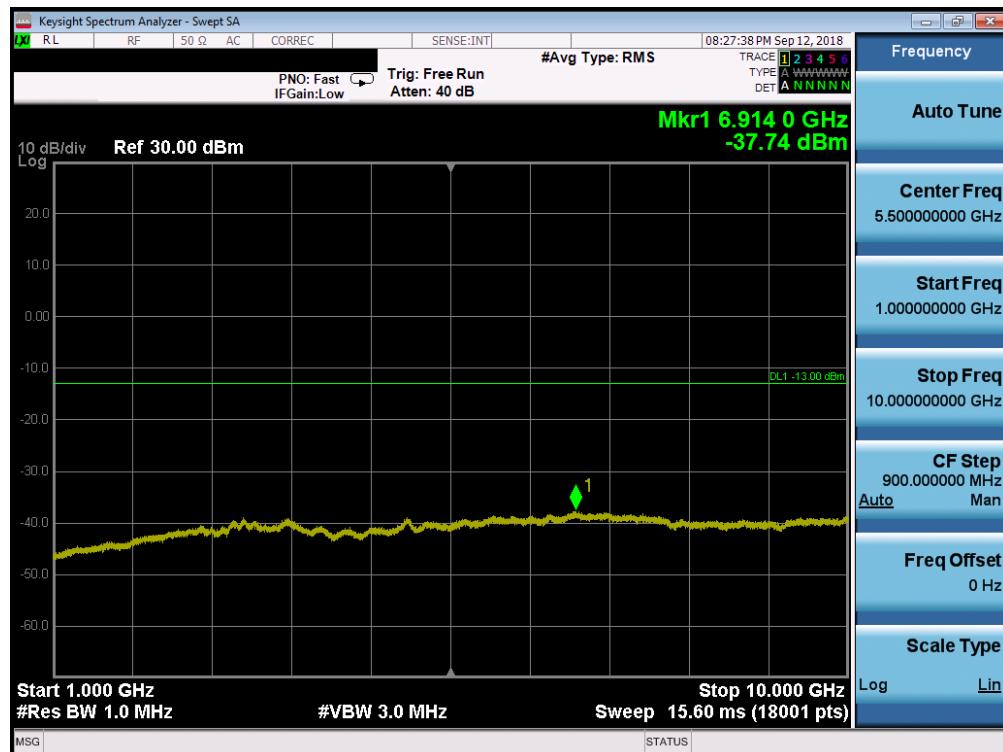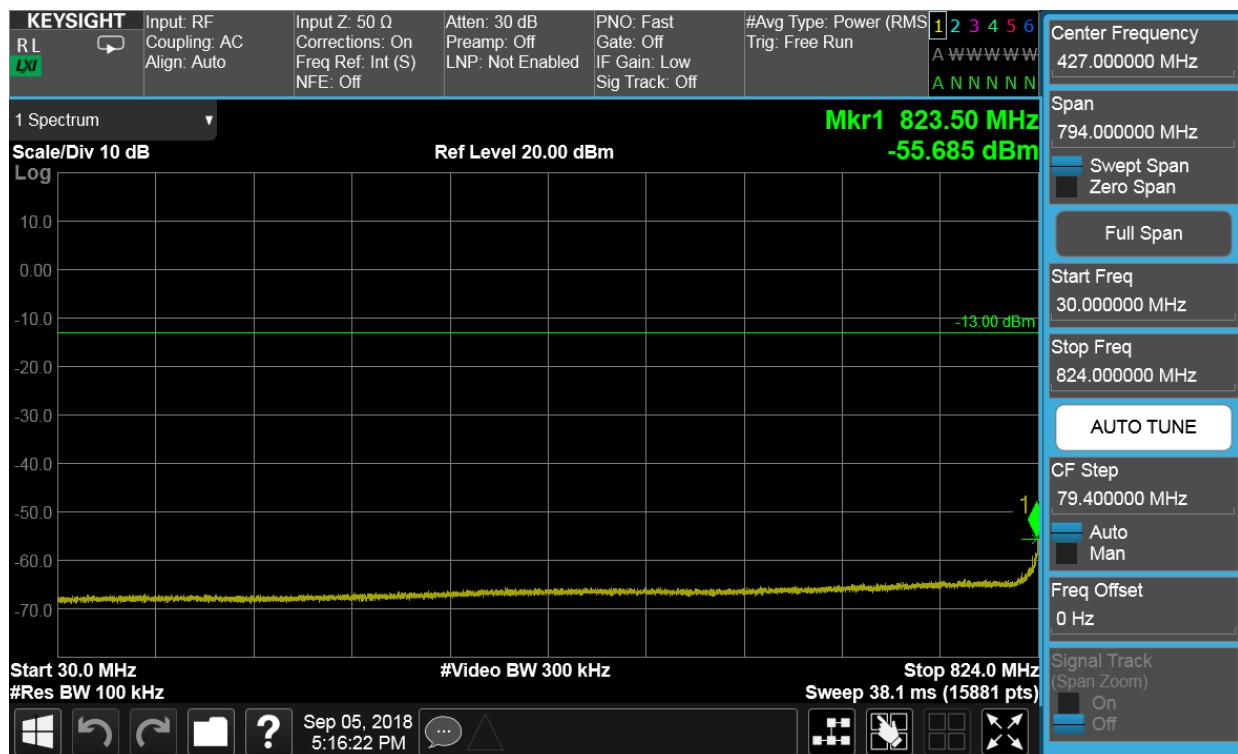
Plot 7-28. Conducted Spurious Plot (Cellular WCDMA Mode - Low Channel)

Plot 7-29. Conducted Spurious Plot (Cellular WCDMA Mode - Mid Channel)

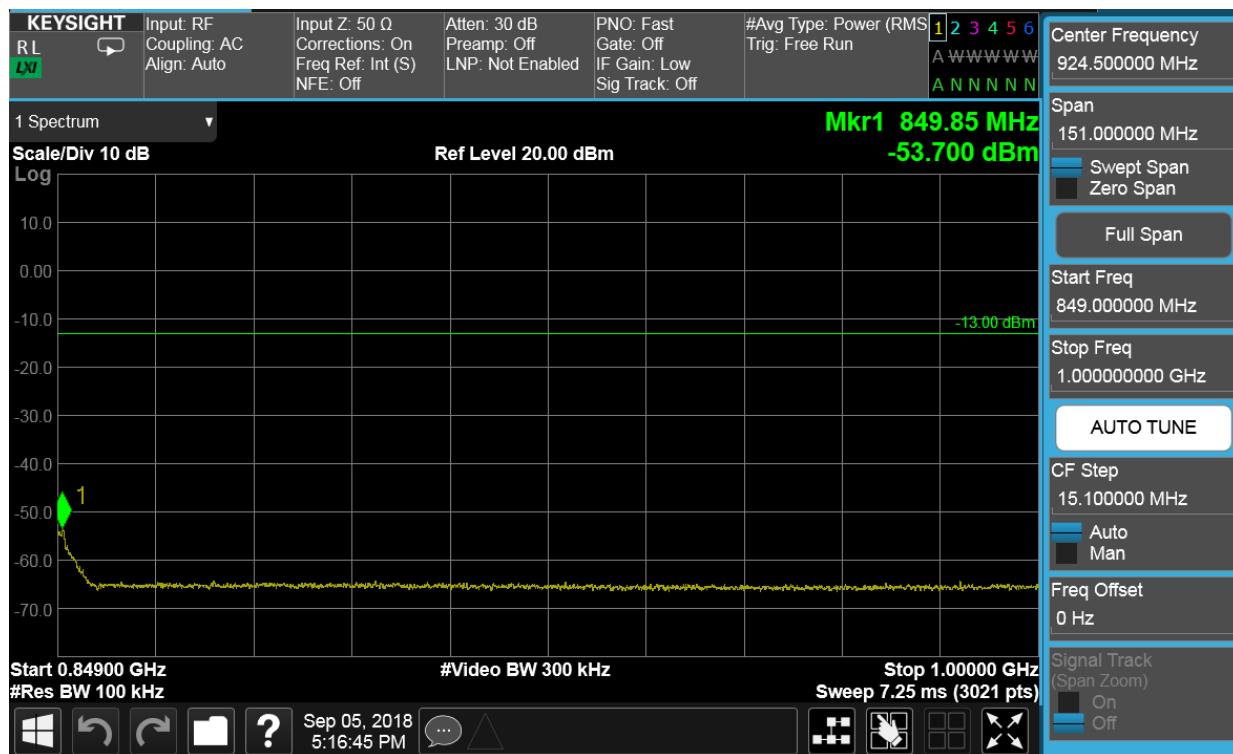FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device		Page 31 of 112

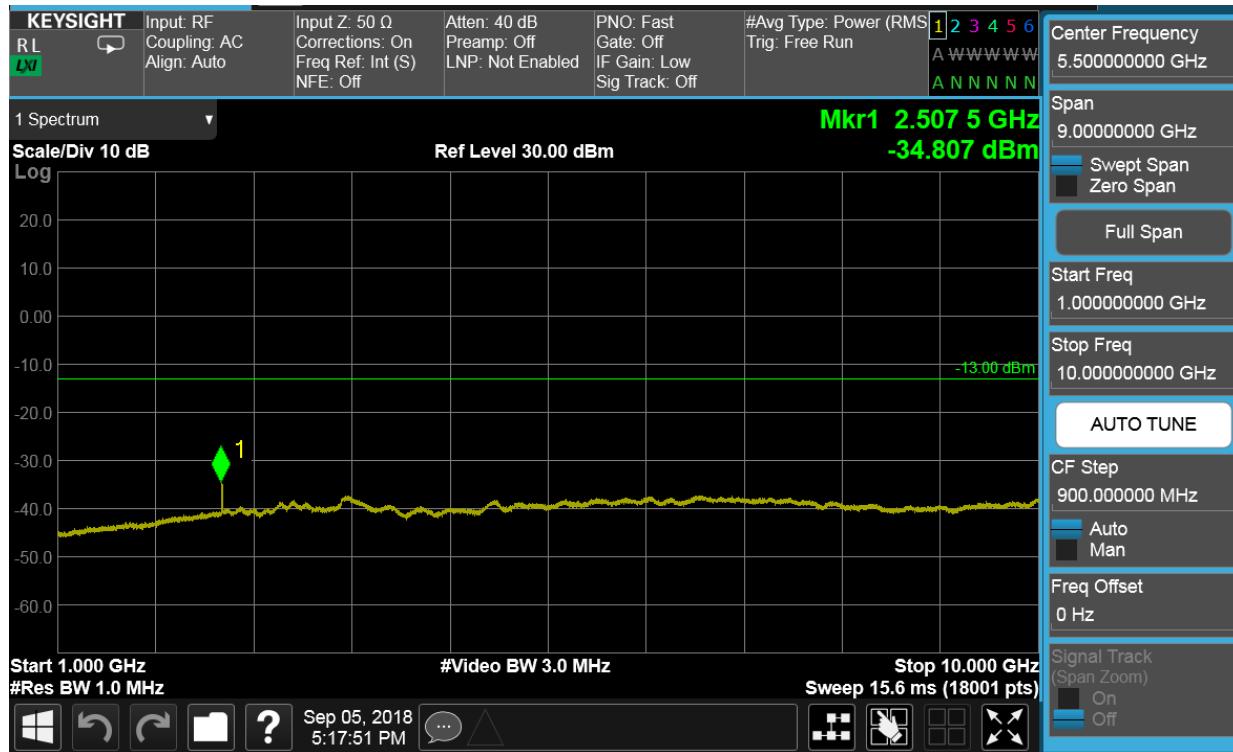

Plot 7-30. Conducted Spurious Plot (Cellular WCDMA Mode - Mid Channel)




Plot 7-31. Conducted Spurious Plot (Cellular WCDMA Mode - Mid Channel)

FCC ID: BCGA1934	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device		Page 32 of 112




Plot 7-32. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)

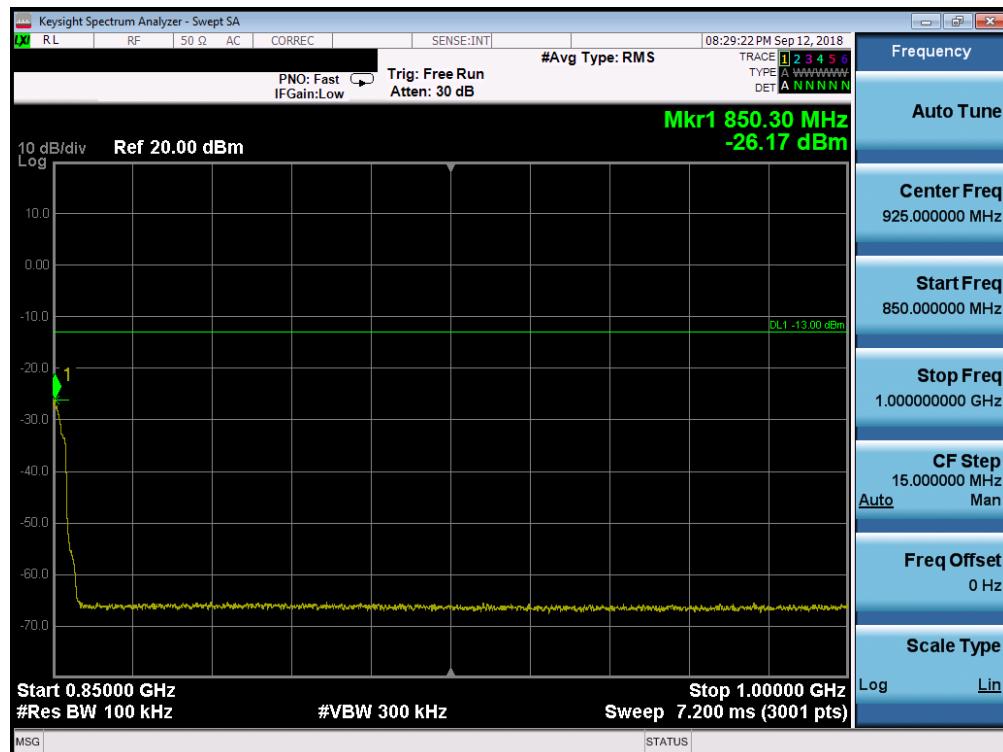

Plot 7-33. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)


FCC ID: BCGA1934	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 33 of 112	

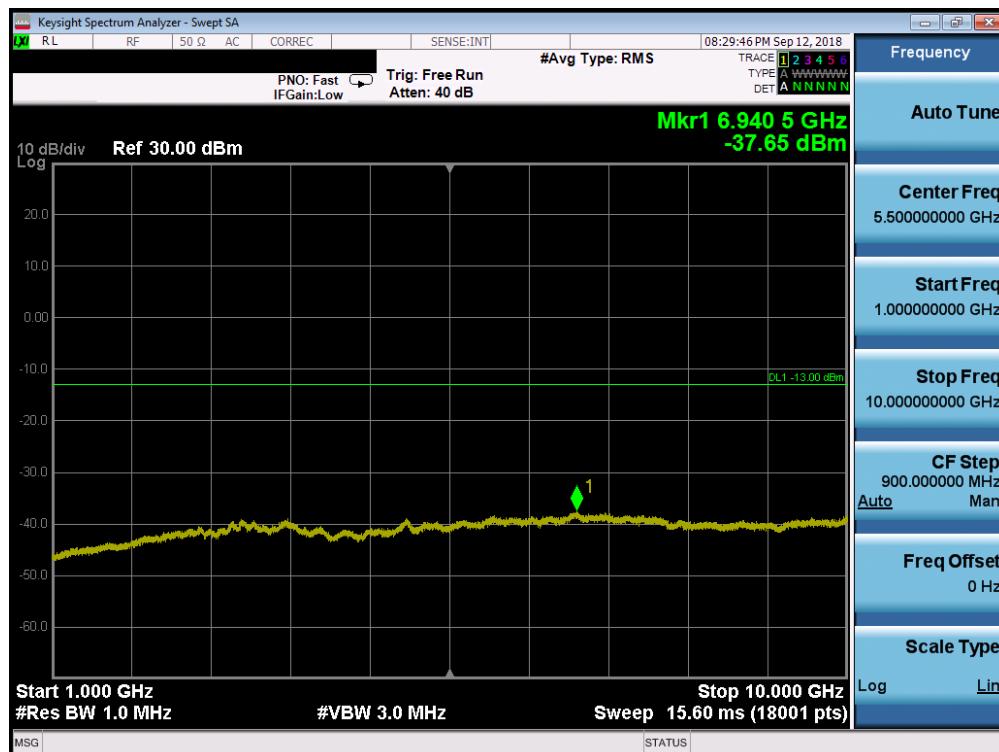


Plot 7-34. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)

FCC ID: BCGA1934		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device		Page 34 of 112

AWS WCDMA Mode

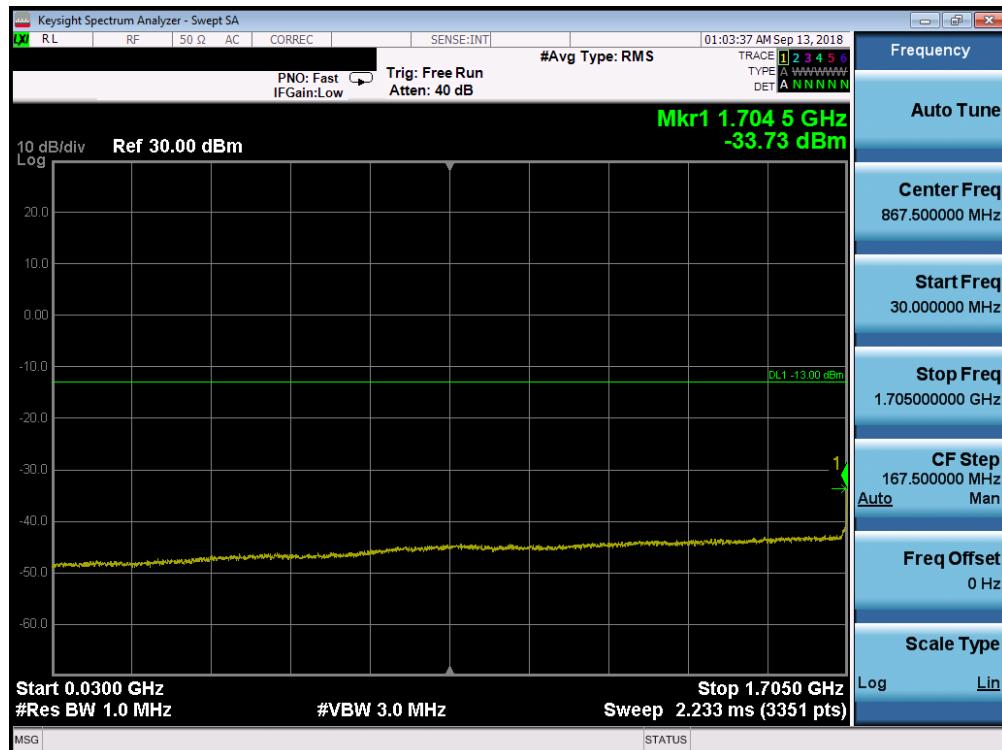


Plot 7-35. Conducted Spurious Plot (AWS WCDMA Mode - Low Channel)

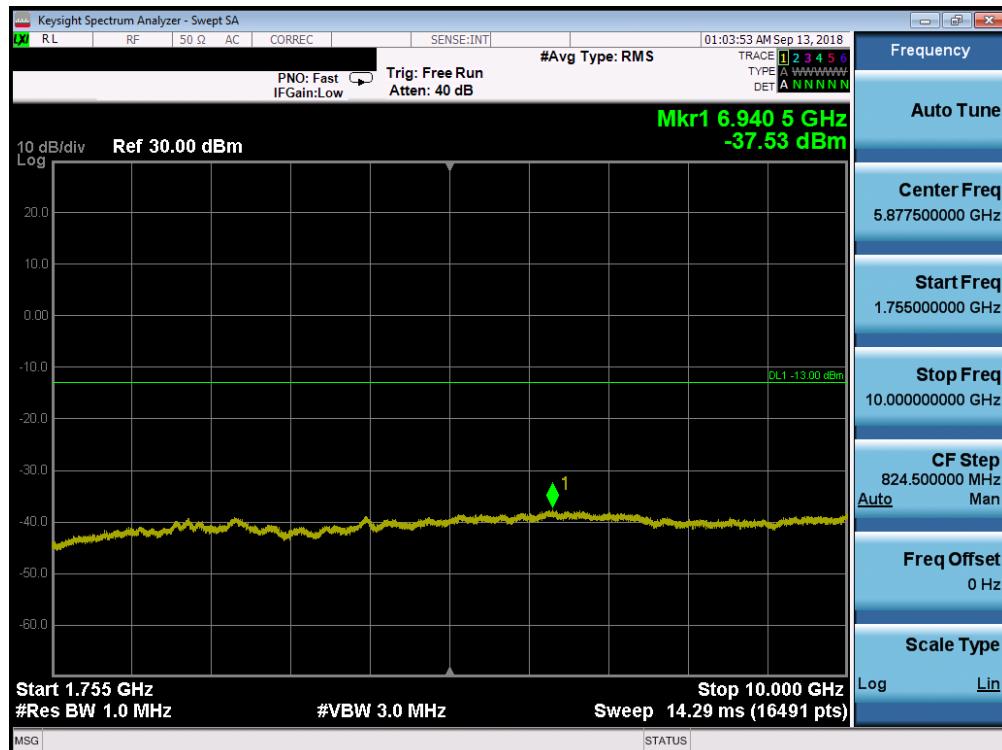


Plot 7-36. Conducted Spurious Plot (AWS WCDMA Mode - Low Channel)

FCC ID: BCGA1934	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device		Page 35 of 112

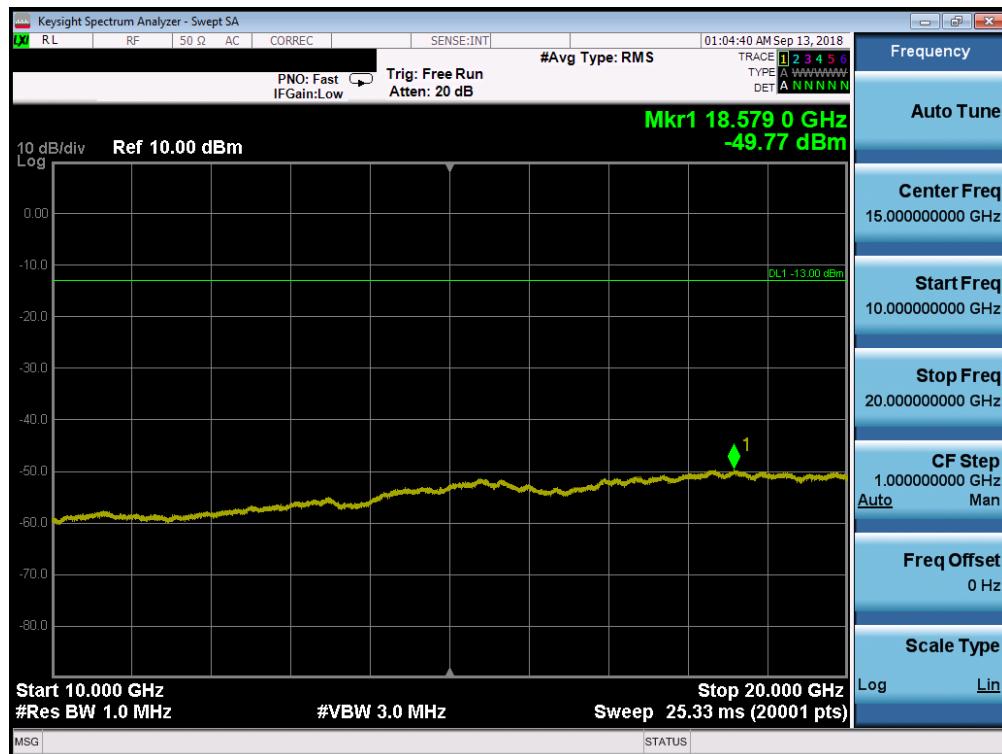


Plot 7-37. Conducted Spurious Plot (AWS WCDMA Mode - Low Channel)

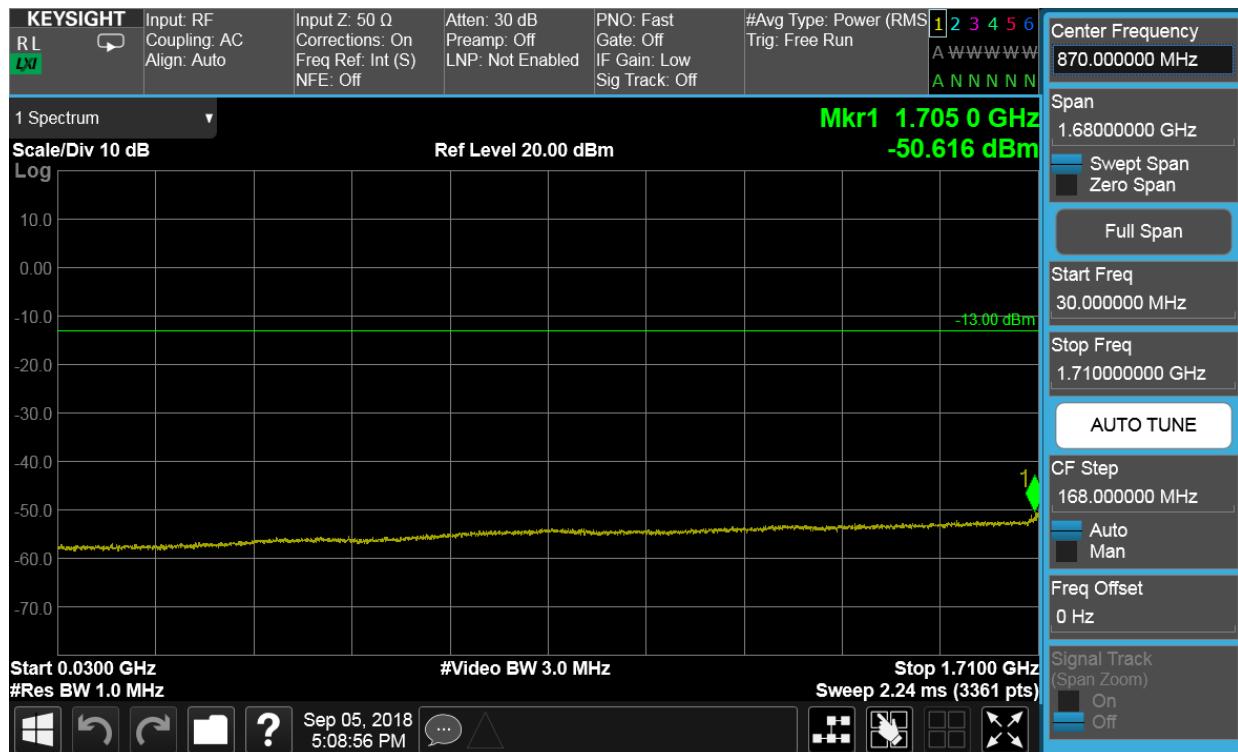


Plot 7-38. Conducted Spurious Plot (AWS WCDMA Mode - Mid Channel)

FCC ID: BCGA1934	 PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 36 of 112

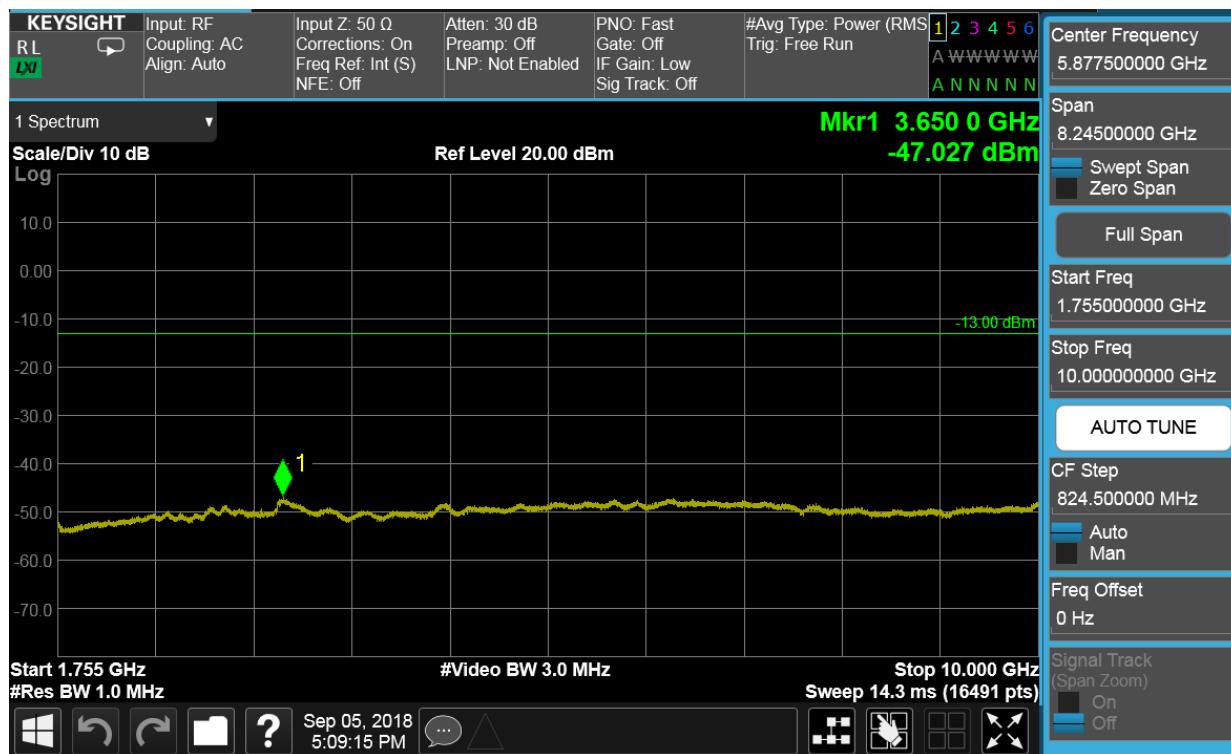


Plot 7-39. Conducted Spurious Plot (AWS WCDMA Mode - Mid Channel)

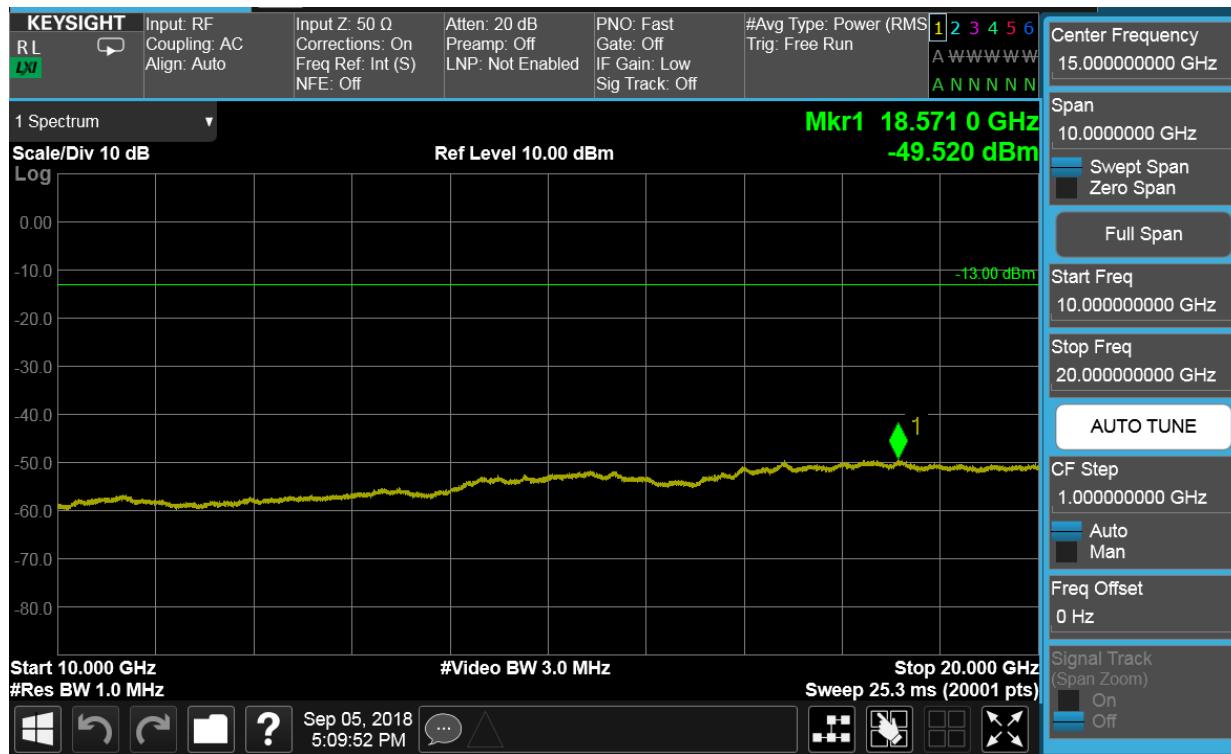


Plot 7-40. Conducted Spurious Plot (AWS WCDMA Mode - Mid Channel)

FCC ID: BCGA1934	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device		Page 37 of 112

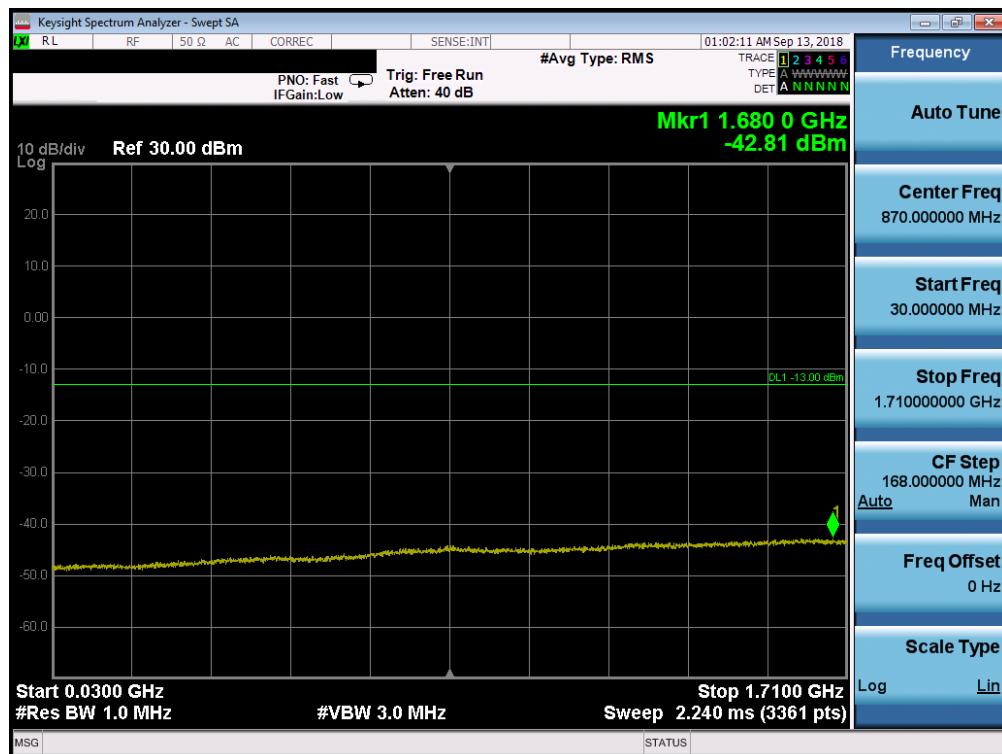


Plot 7-41. Conducted Spurious Plot (AWS WCDMA Mode - High Channel)

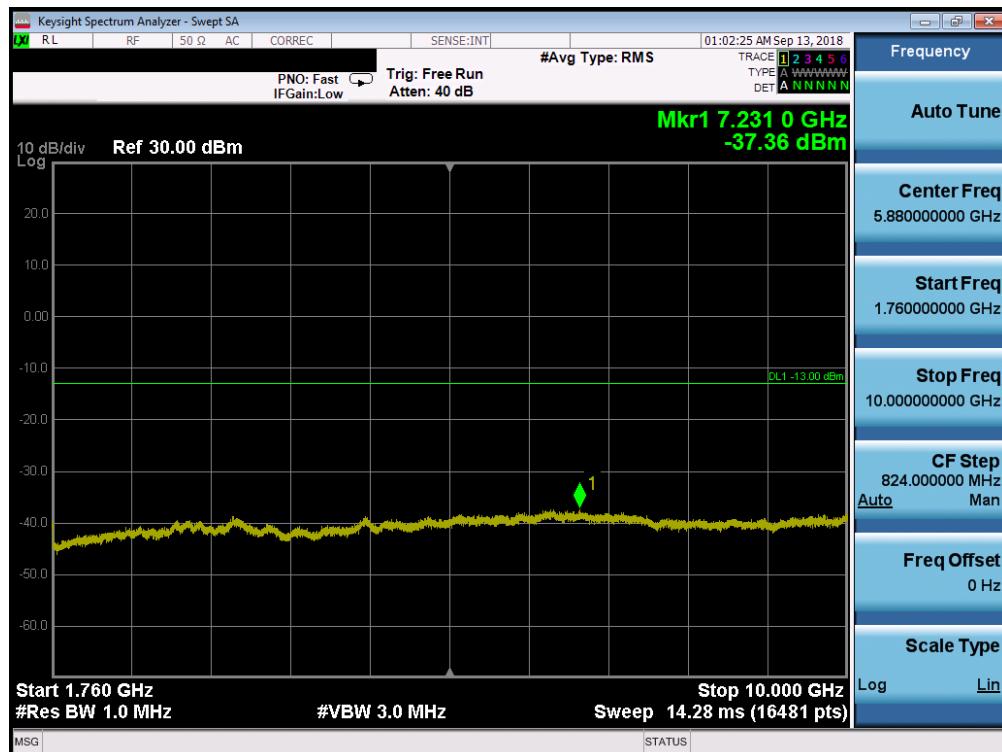

Plot 7-42. Conducted Spurious Plot (AWS WCDMA Mode - High Channel)


FCC ID: BCGA1934	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device		Page 38 of 112

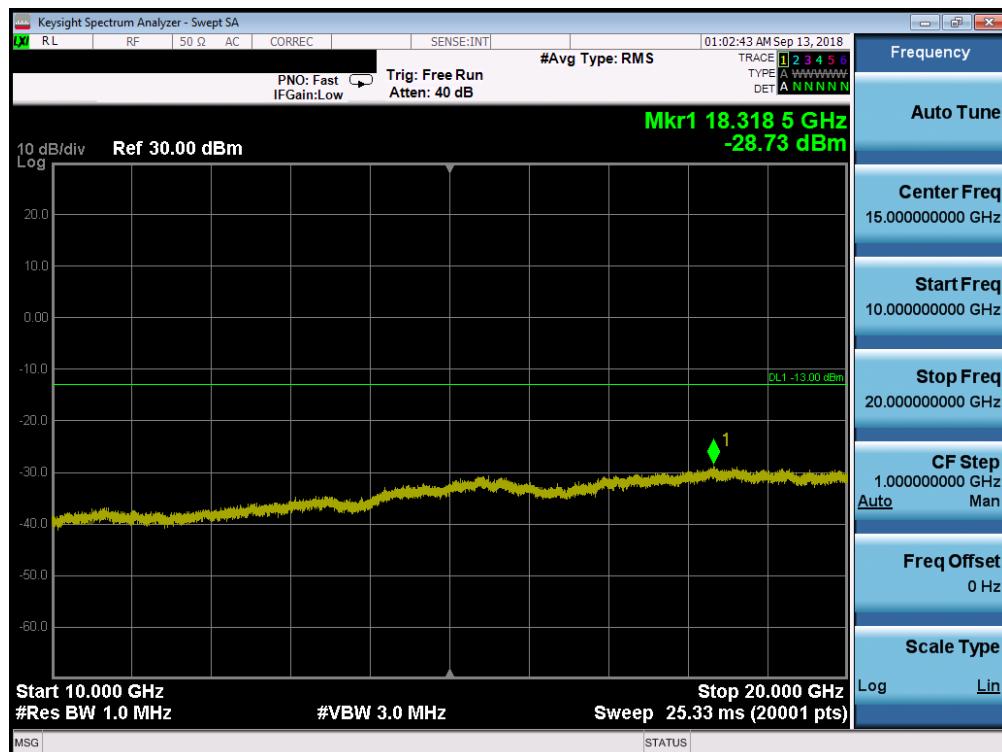


Plot 7-43. Conducted Spurious Plot (AWS WCDMA Mode - High Channel)

FCC ID: BCGA1934	PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 39 of 112

PCS WCDMA Mode

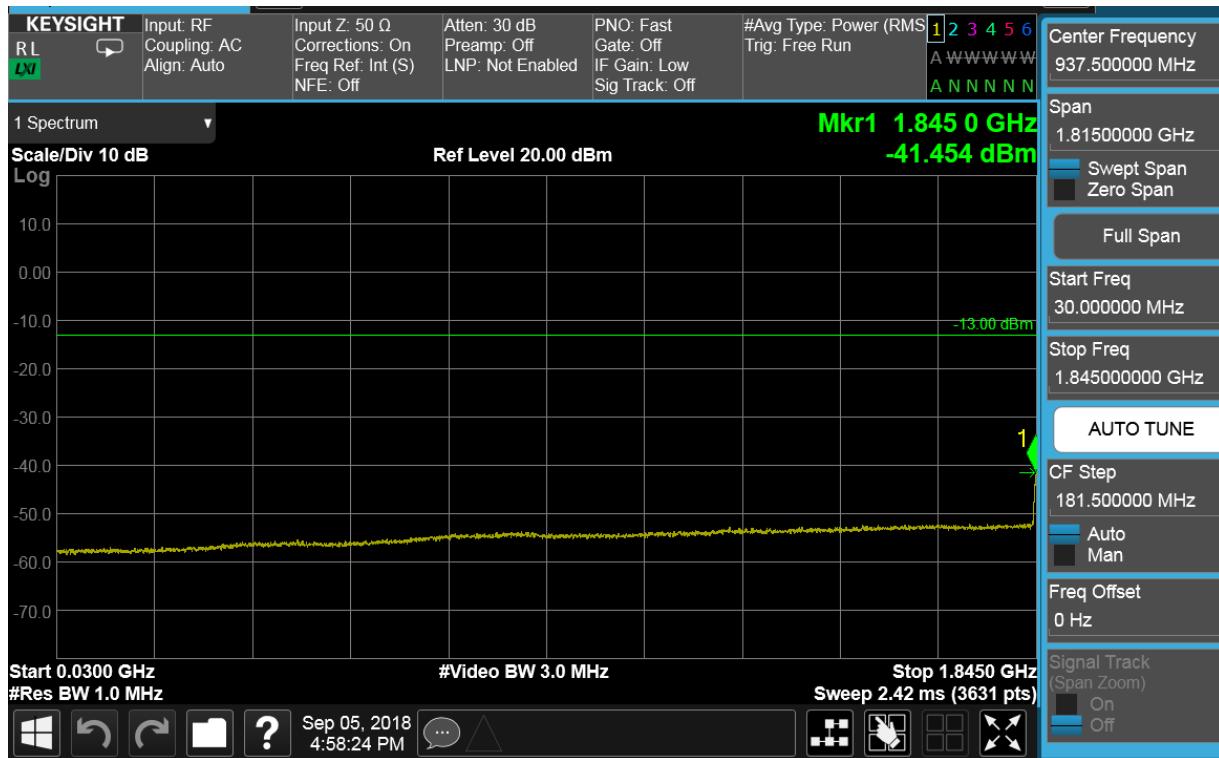


Plot 7-44. Conducted Spurious Plot (PCS WCDMA Mode - Low Channel)

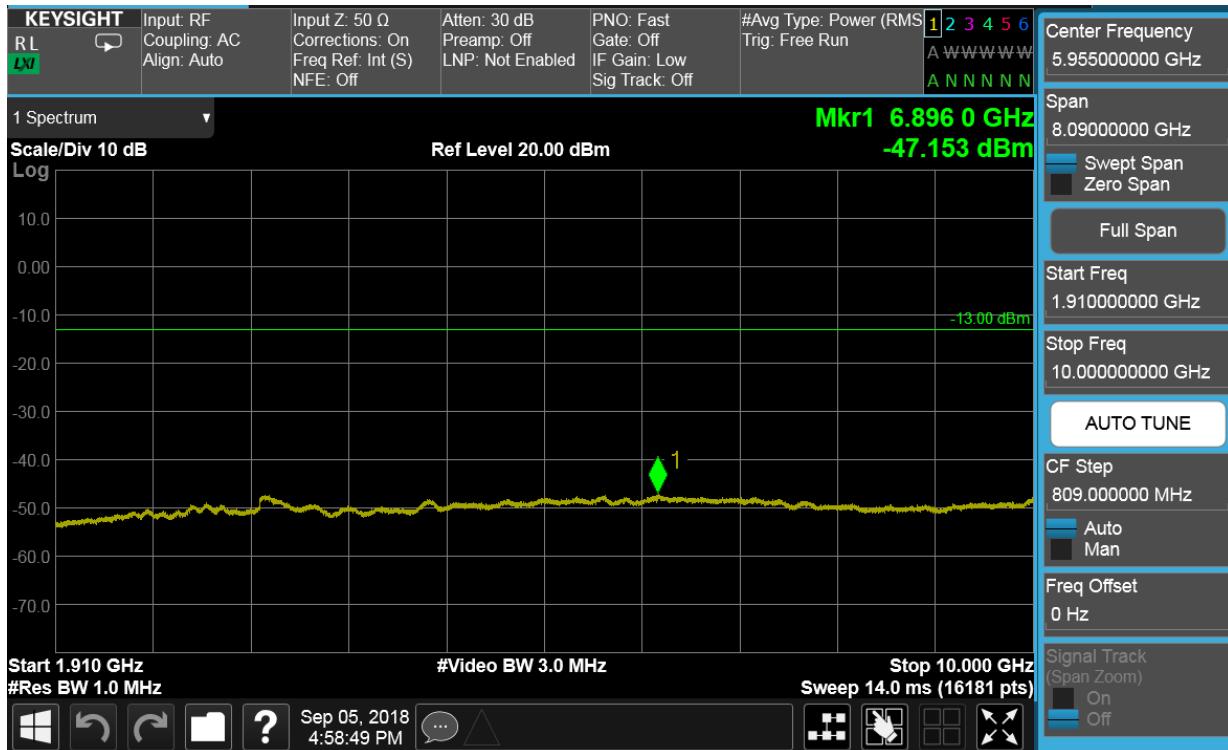


Plot 7-45. Conducted Spurious Plot (PCS WCDMA Mode - Low Channel)

FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device		Page 40 of 112

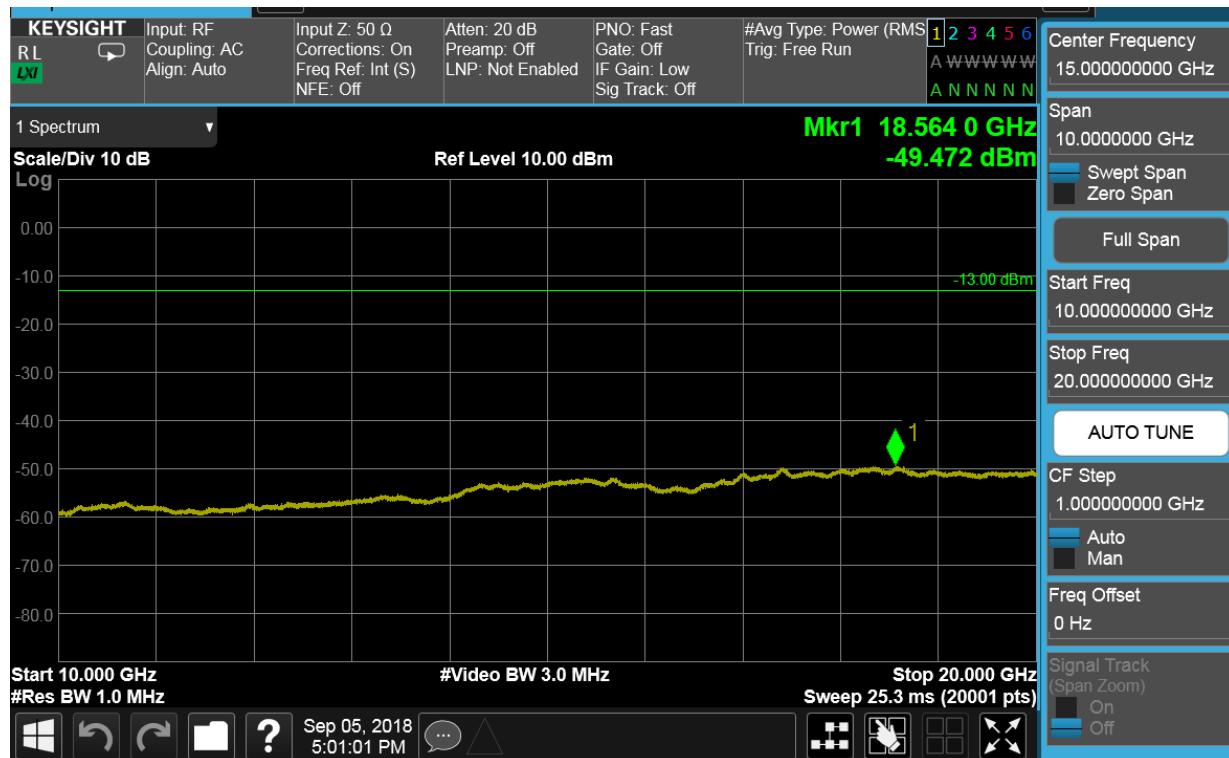


Plot 7-46. Conducted Spurious Plot (PCS WCDMA Mode - Low Channel)

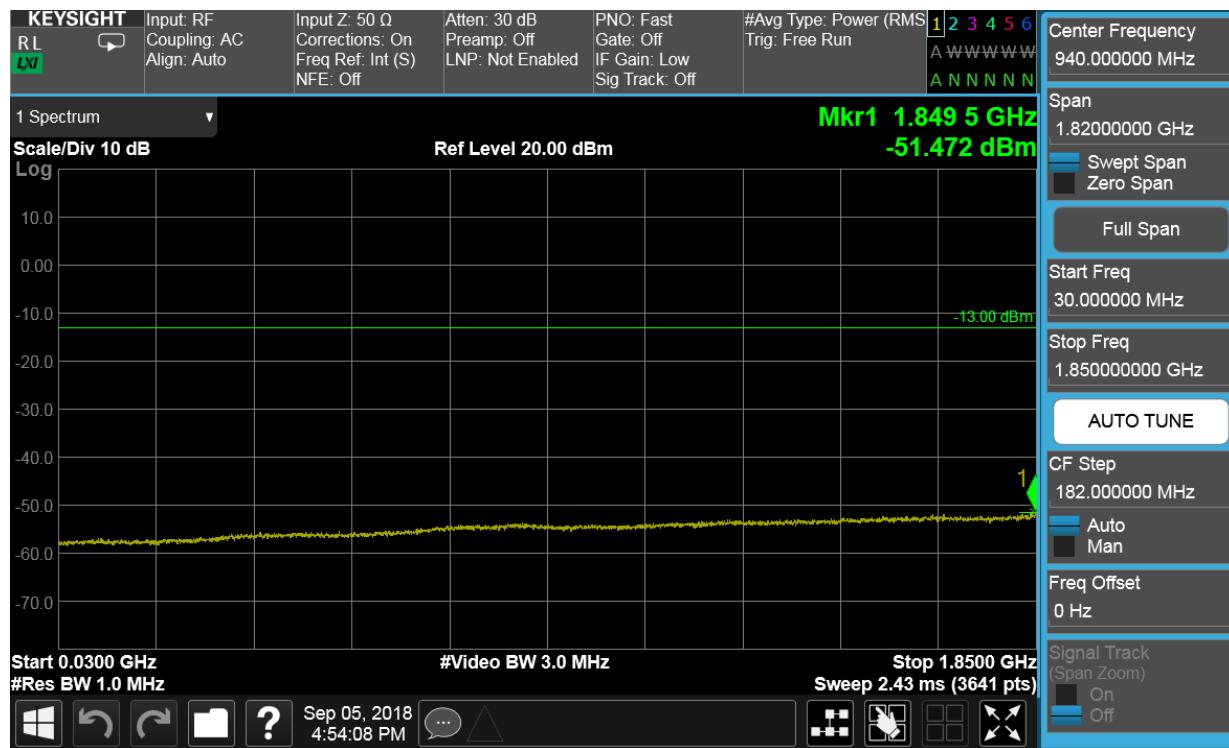


Plot 7-47. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)

FCC ID: BCGA1934	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device		Page 41 of 112

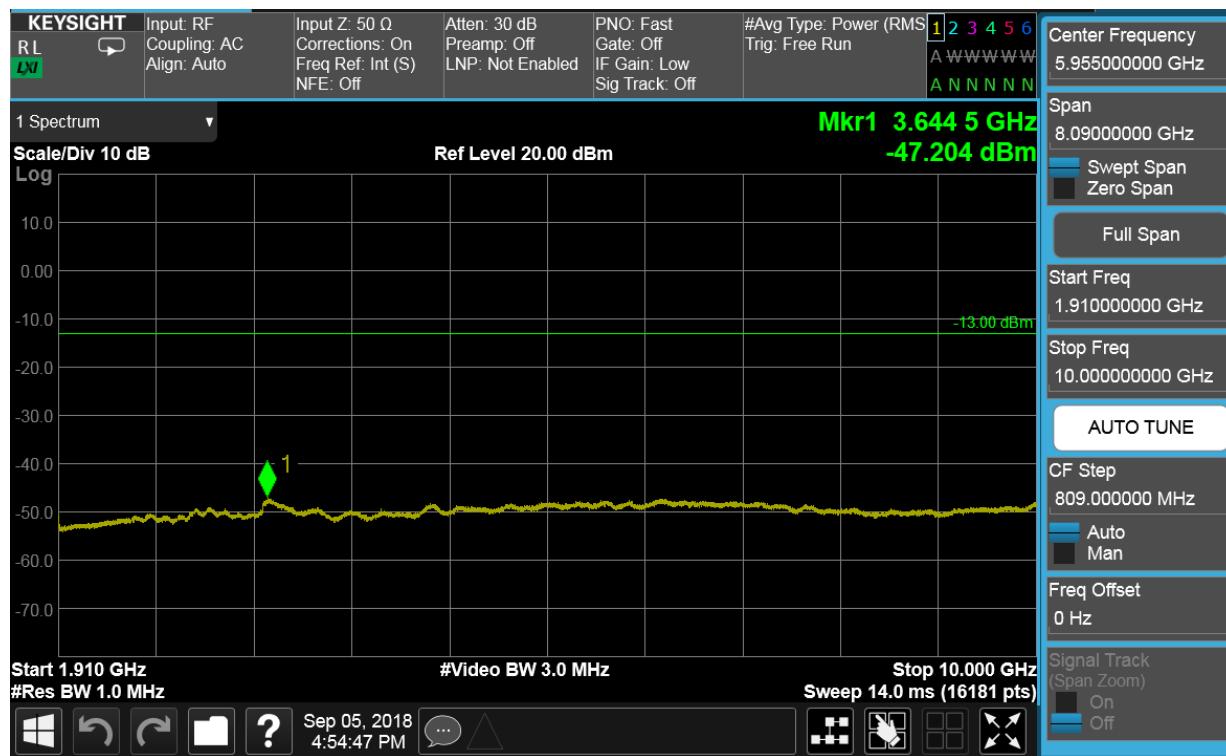

Plot 7-48. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)

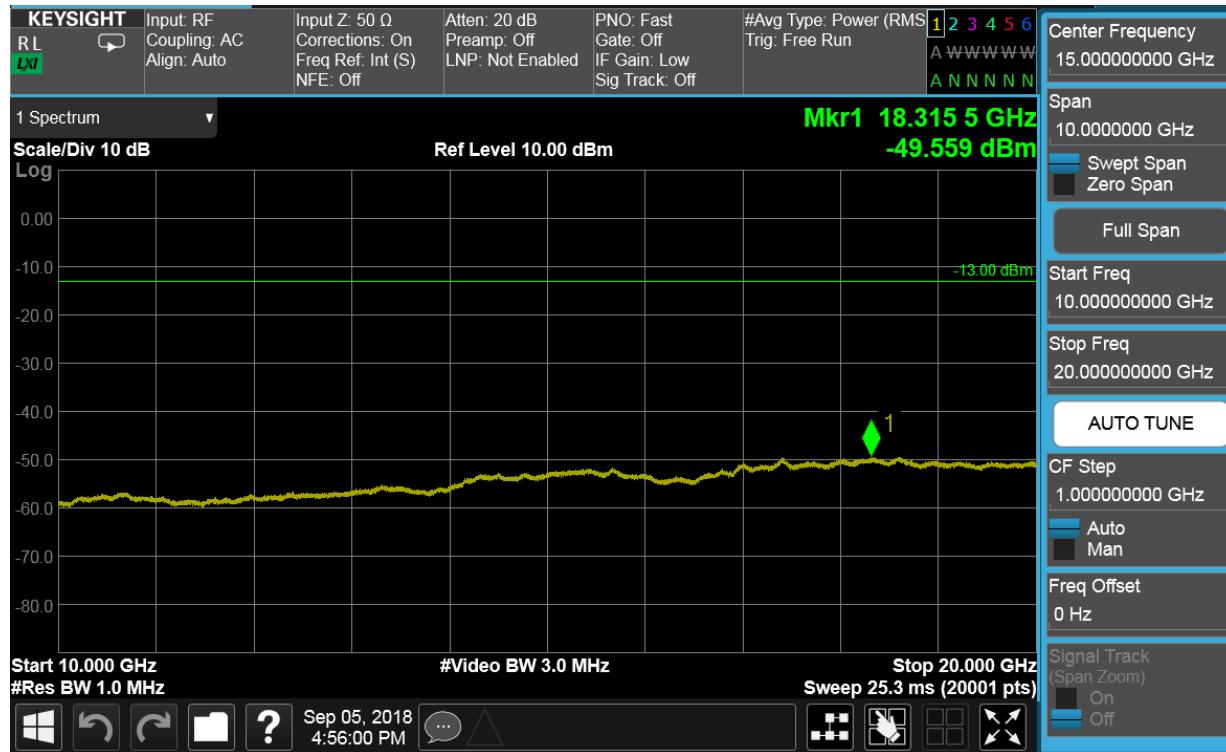


Plot 7-49. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)

FCC ID: BCGA1934	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 42 of 112



Plot 7-50. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

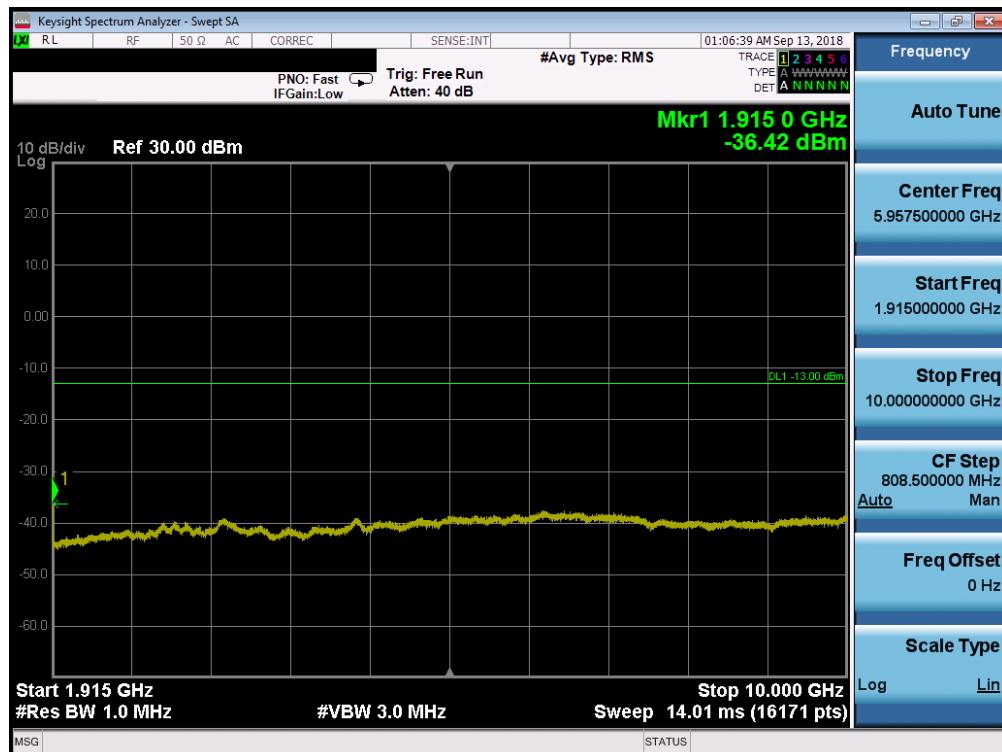

Plot 7-51. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

FCC ID: BCGA1934	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device		Page 43 of 112



Plot 7-52. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

FCC ID: BCGA1934	PCTEST® ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 44 of 112	

7.4 Band Edge Emissions at Antenna Terminal

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{\text{Watts}})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW \geq 1% of the emission bandwidth
4. VBW \geq 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

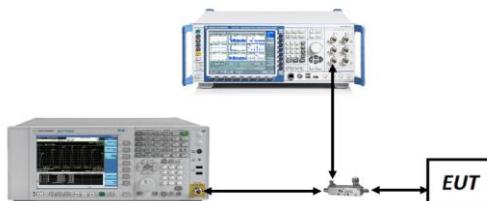



Figure 7-3. Test Instrument & Measurement Setup

Test Notes


1. Per 22.917(b), 24.238(b), 27.53(h)(3), and RSS-132(5.5), RSS-133(6.5), RSS-139(6.5), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
2. All ports were tested and only the worst case data were reported.
3. Refer to Table 2-1 Section 2.3 of this test report for correlation between Antennas and Ports.

FCC ID: BCGA1934	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 45 of 112

Cellular GSM/GPRS Mode

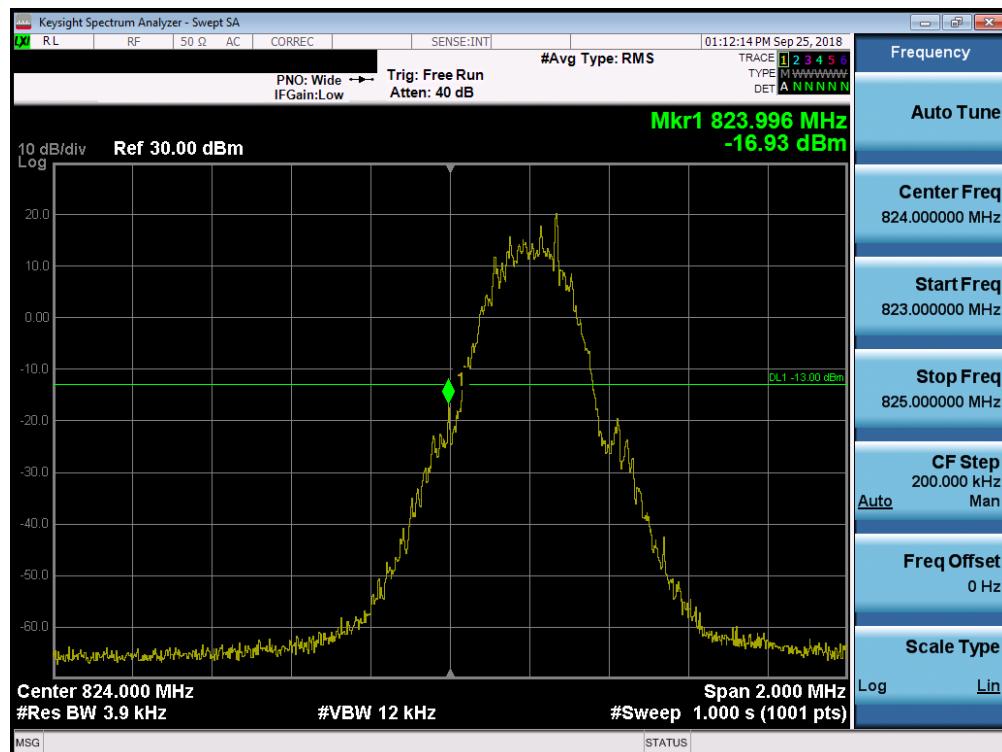


Plot 7-53. Band Edge Plot (Cellular GSM Mode - Low Channel)

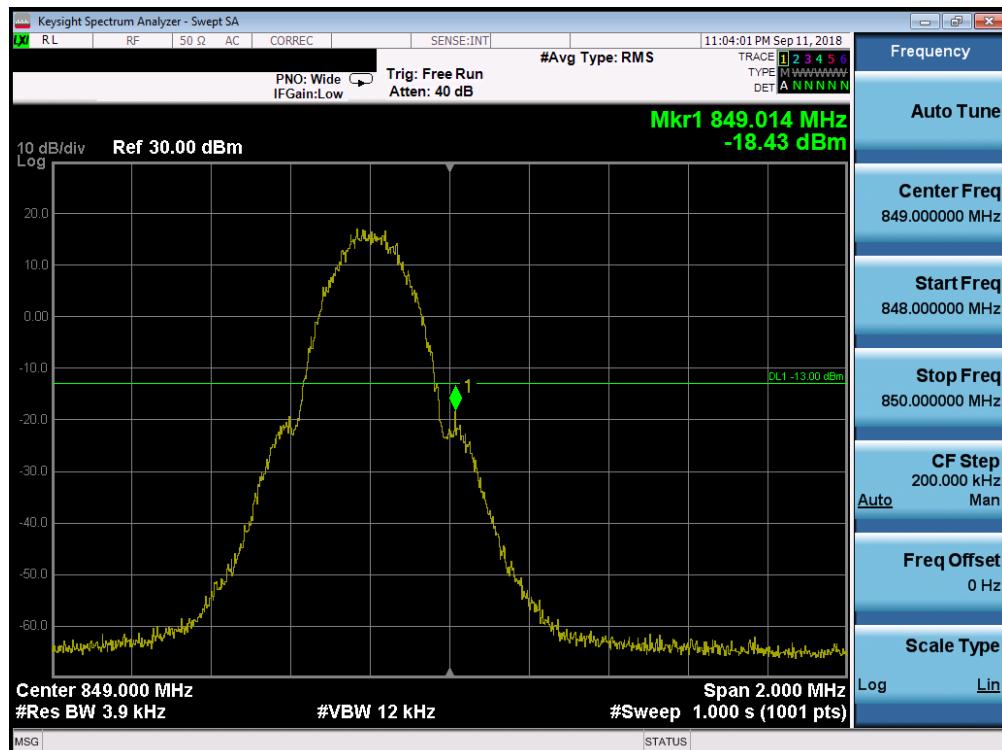


Plot 7-54. Band Edge Plot (Cellular GPRS Mode - High Channel)

FCC ID: BCGA1934	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device		Page 46 of 112

PCS GSM/GPRS Mode

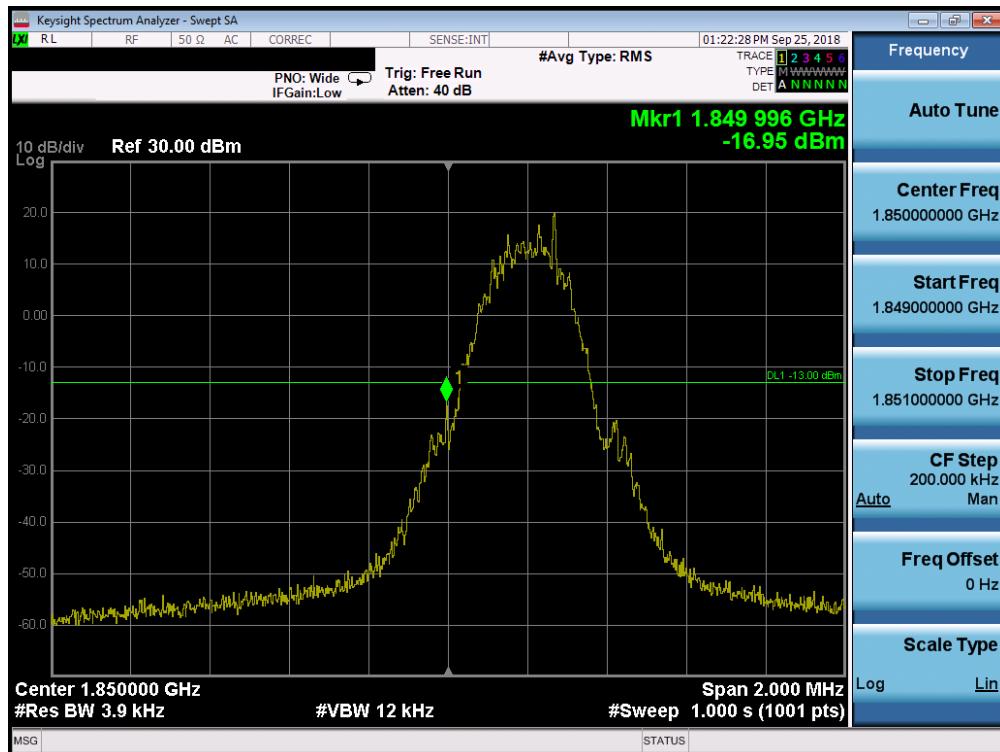


Plot 7-55. Band Edge Plot (PCS GSM Mode - Low Channel)

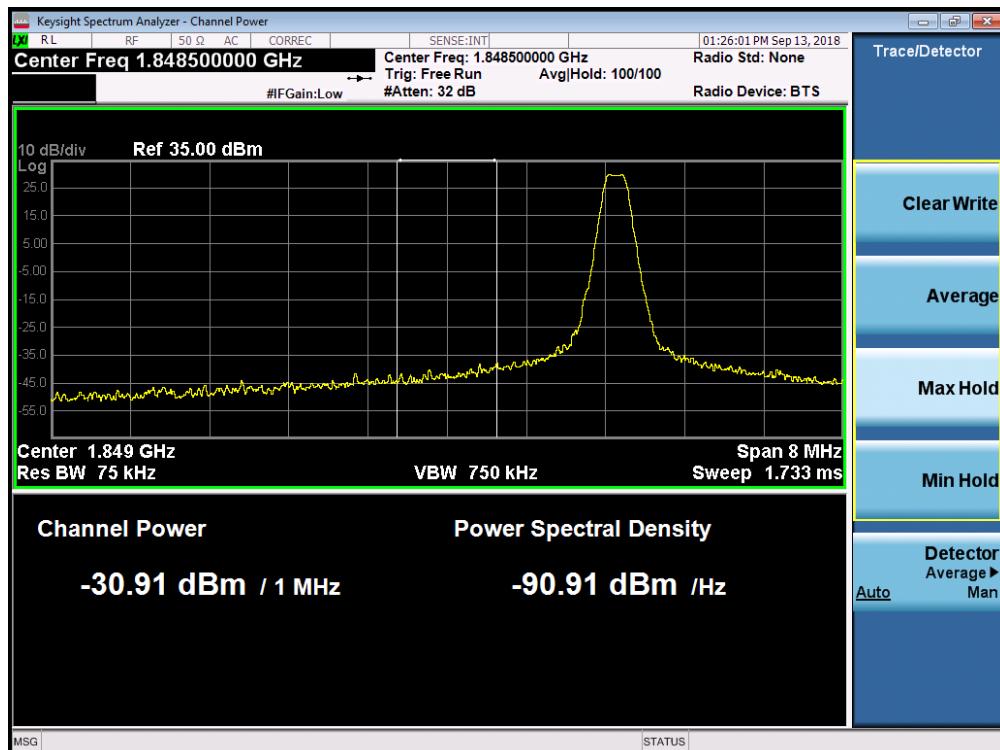


Plot 7-56. 4MHz Span Plot (PCS GSM Mode - Low Channel)

FCC ID: BCGA1934		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device		Page 47 of 112

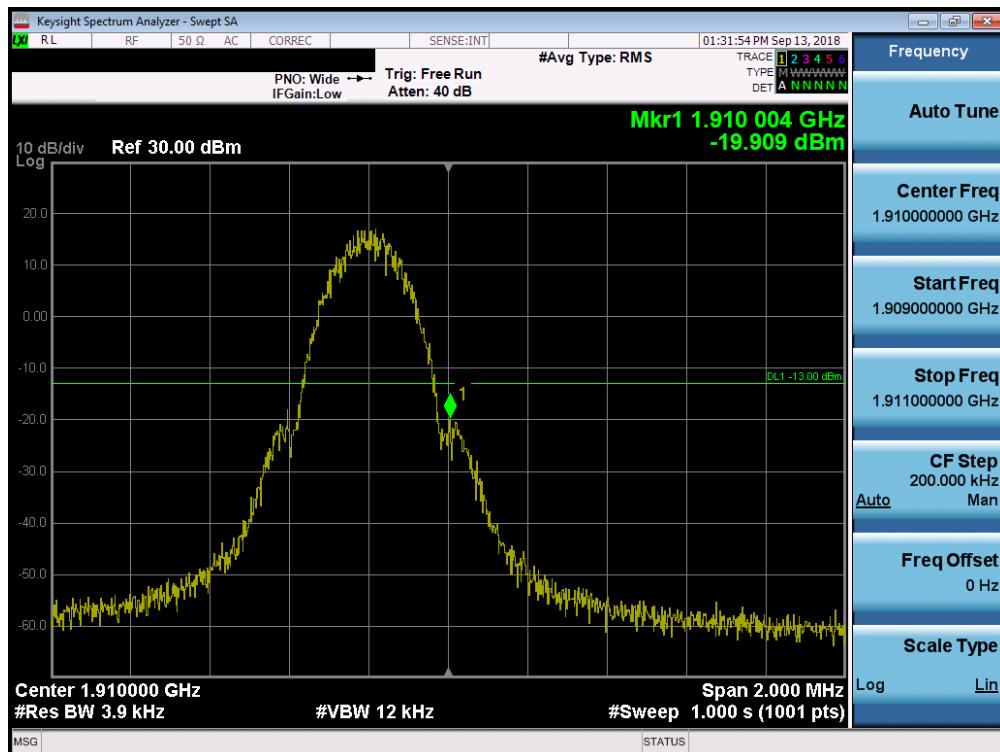


Plot 7-57. Band Edge Plot (PCS GPRS Mode - High Channel)

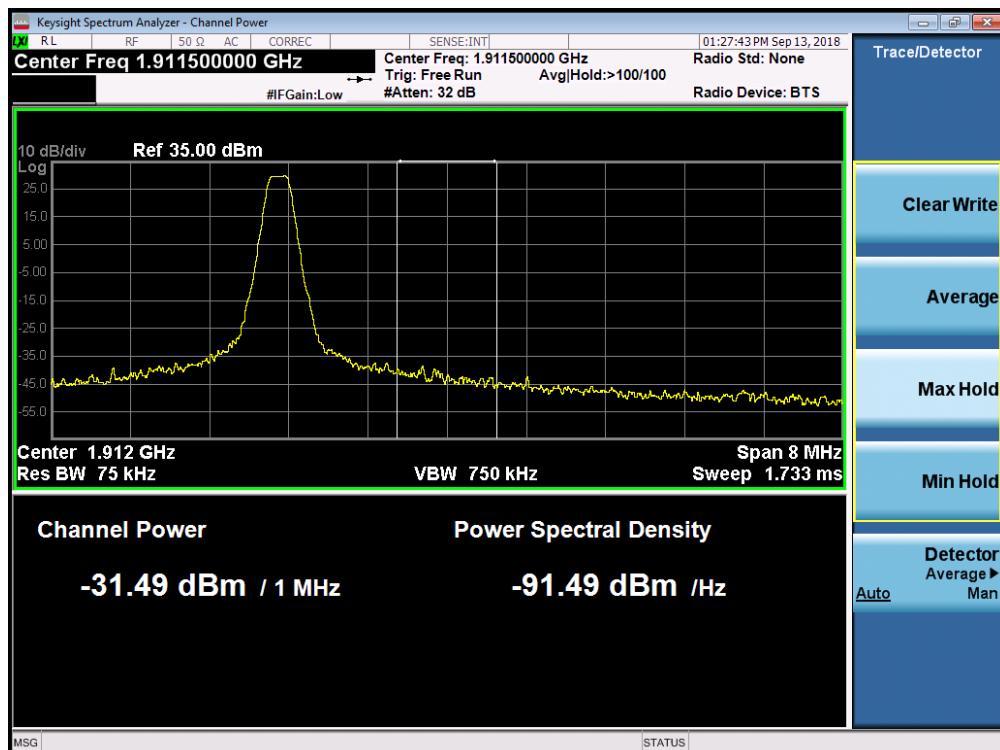

Plot 7-58. 4MHz Span Plot (PCS GPRS Mode - High Channel)

FCC ID: BCGA1934	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 48 of 112


Cellular WCDMA Mode

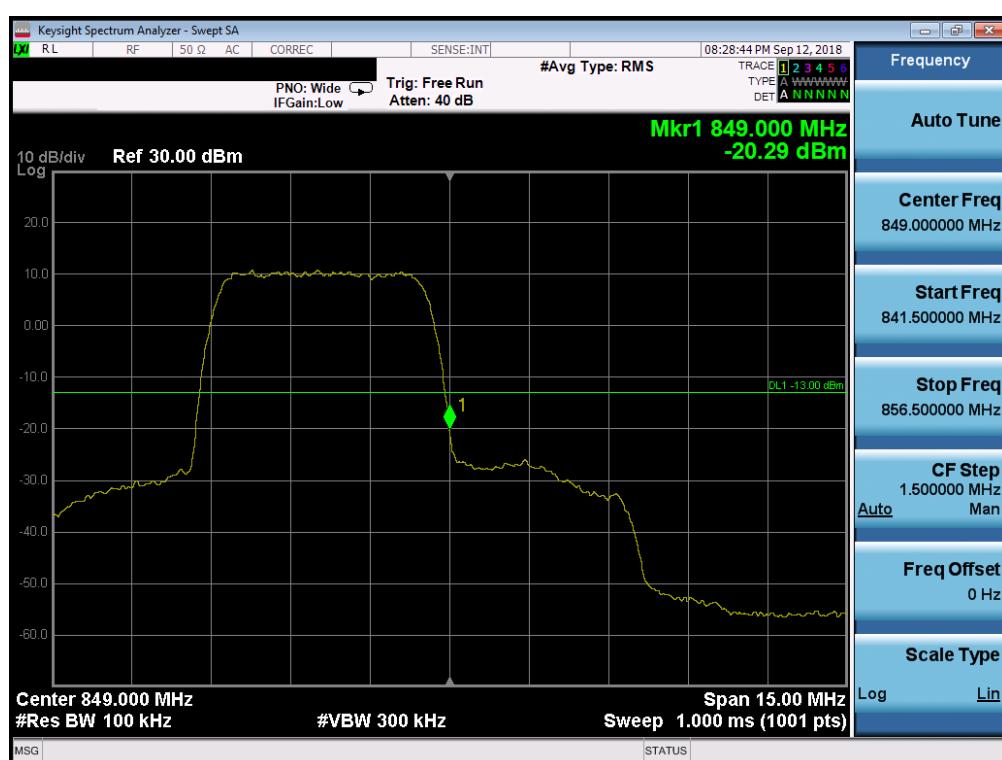

Plot 7-60. Band Edge Plot (Cellular WCDMA Mode - High Channel)

FCC ID: BCGA1934	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 49 of 112	

AWS WCDMA Mode

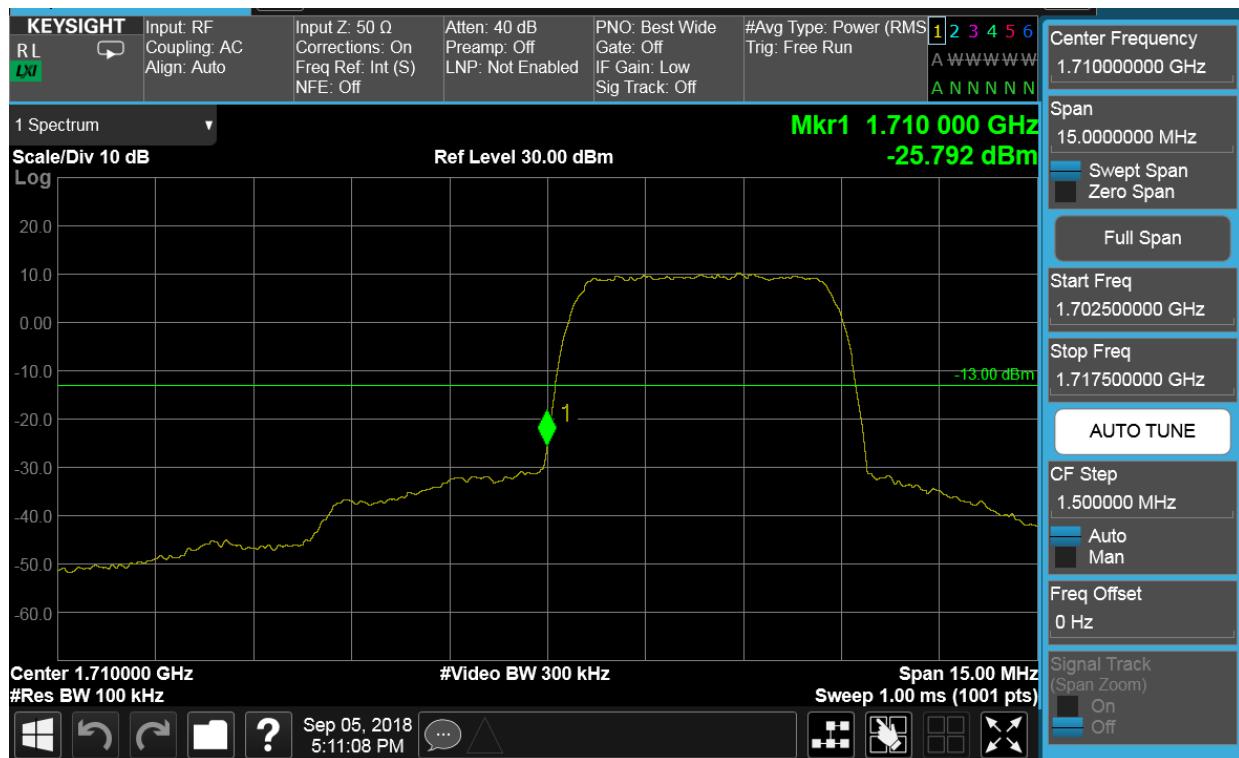


Plot 7-61. Band Edge Plot (AWS WCDMA Mode - Low Channel)




Plot 7-62. 4MHz Span Plot (AWS WCDMA Mode - Low Channel)

FCC ID: BCGA1934		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device		Page 50 of 112

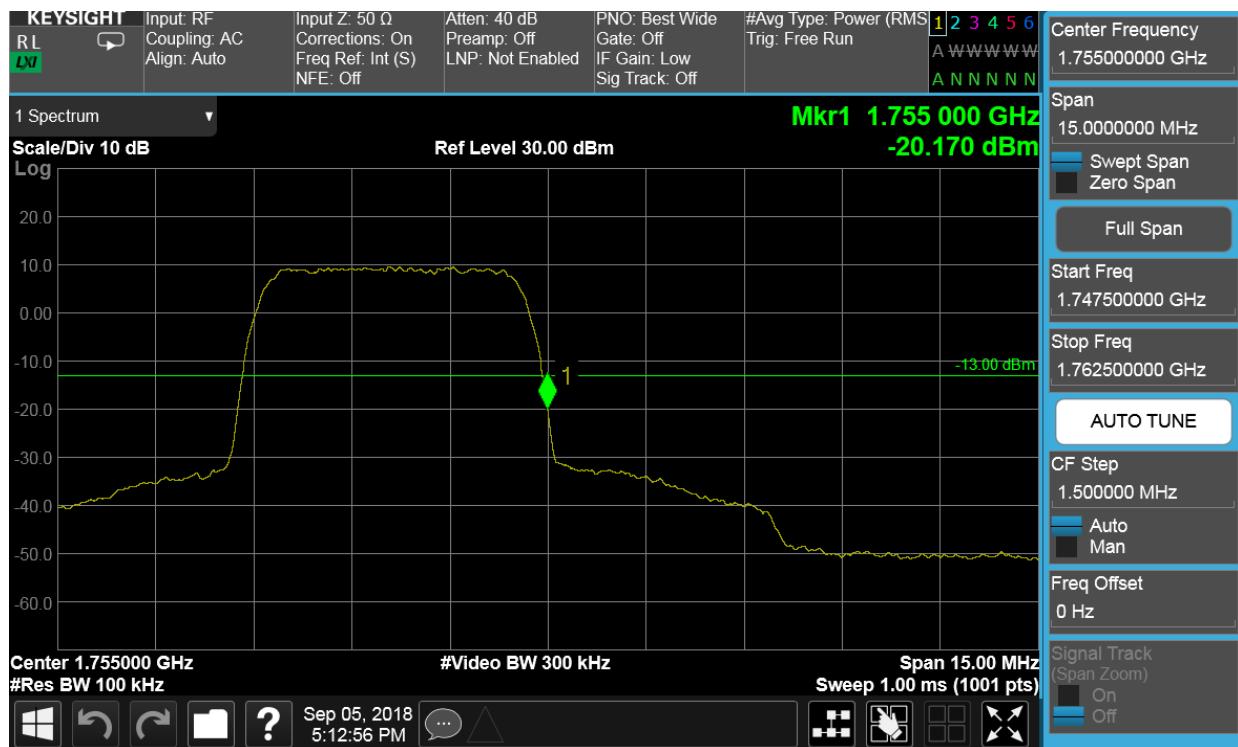


Plot 7-63. Band Edge Plot (AWS WCDMA Mode - High Channel)

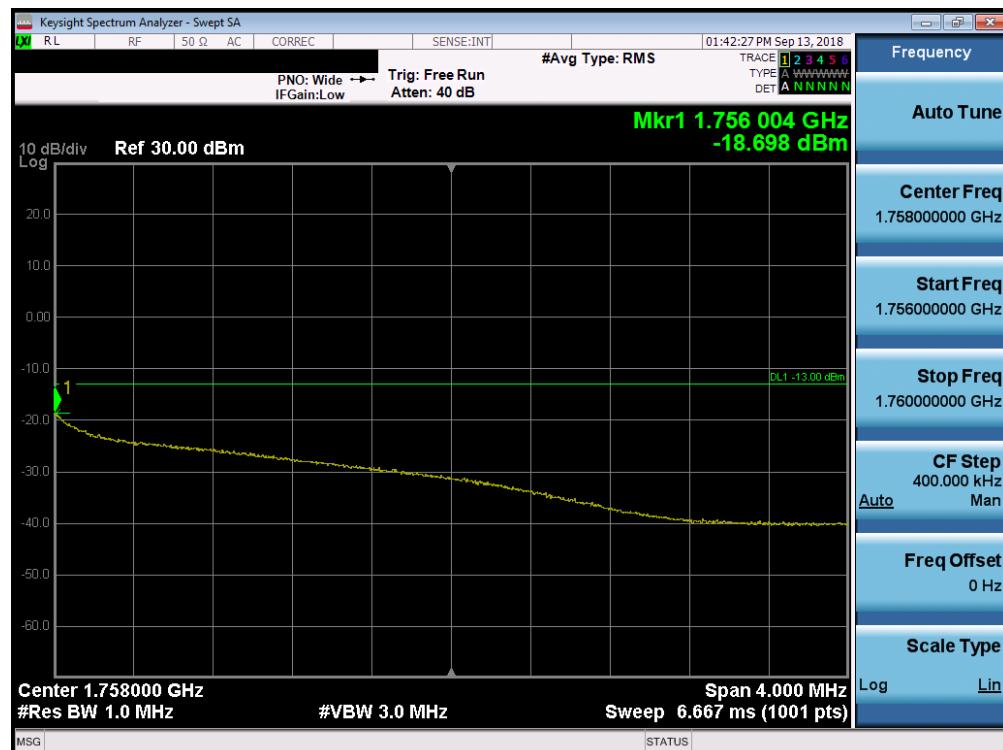


Plot 7-64. 4MHz Span Plot (AWS WCDMA Mode - High Channel)

FCC ID: BCGA1934		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device		Page 51 of 112

PCS WCDMA Mode

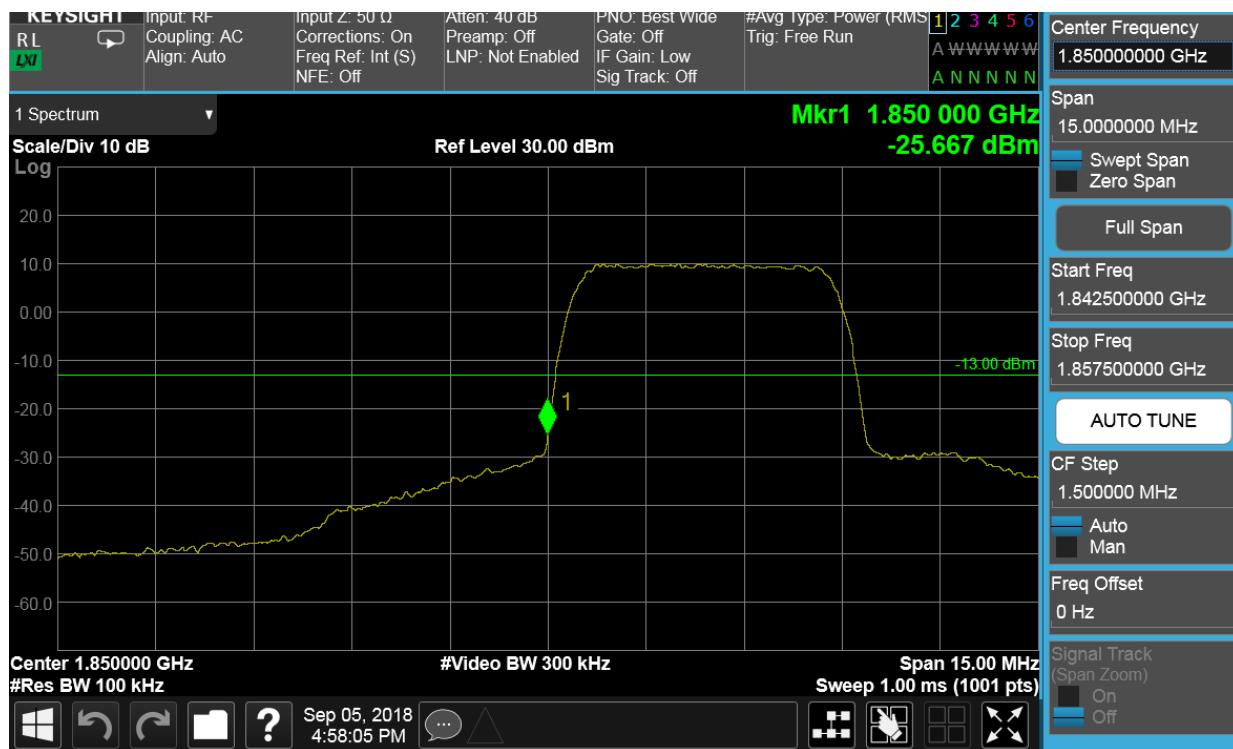


Plot 7-65. Band Edge Plot (PCS WCDMA Mode - Low Channel)

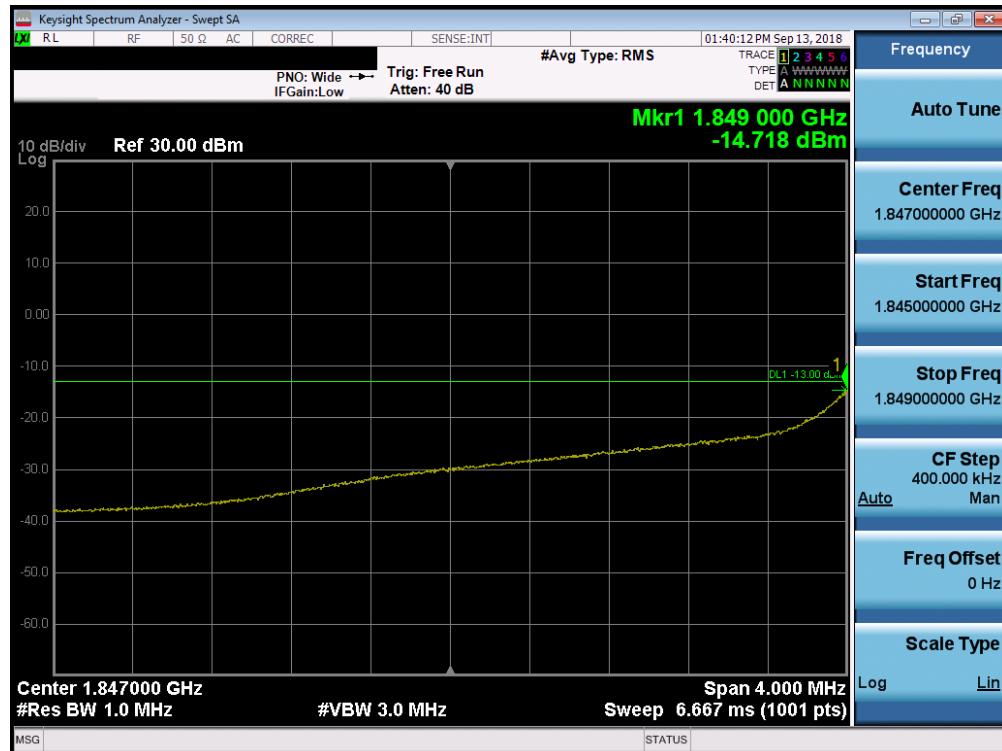


Plot 7-66. 4MHz Span Plot (PCS WCDMA Mode - Low Channel)

FCC ID: BCGA1934		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device		Page 52 of 112

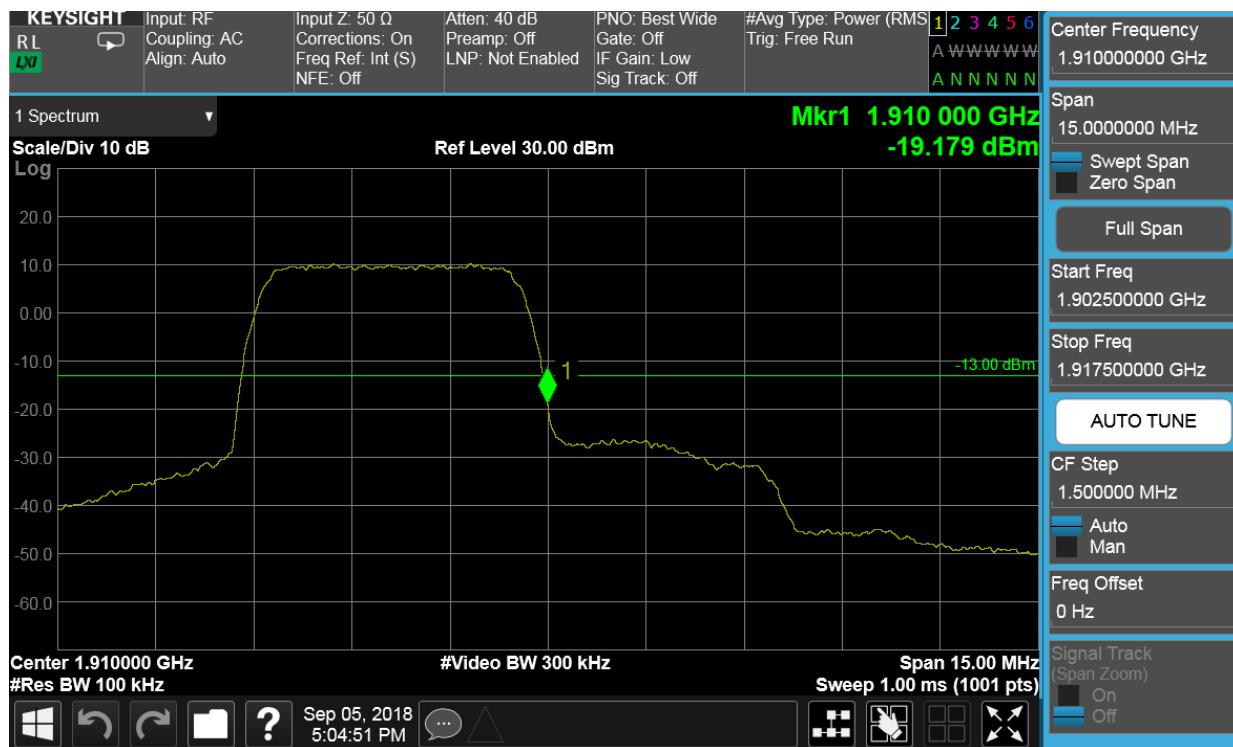

Plot 7-67. Band Edge Plot (PCS WCDMA Mode - High Channel)

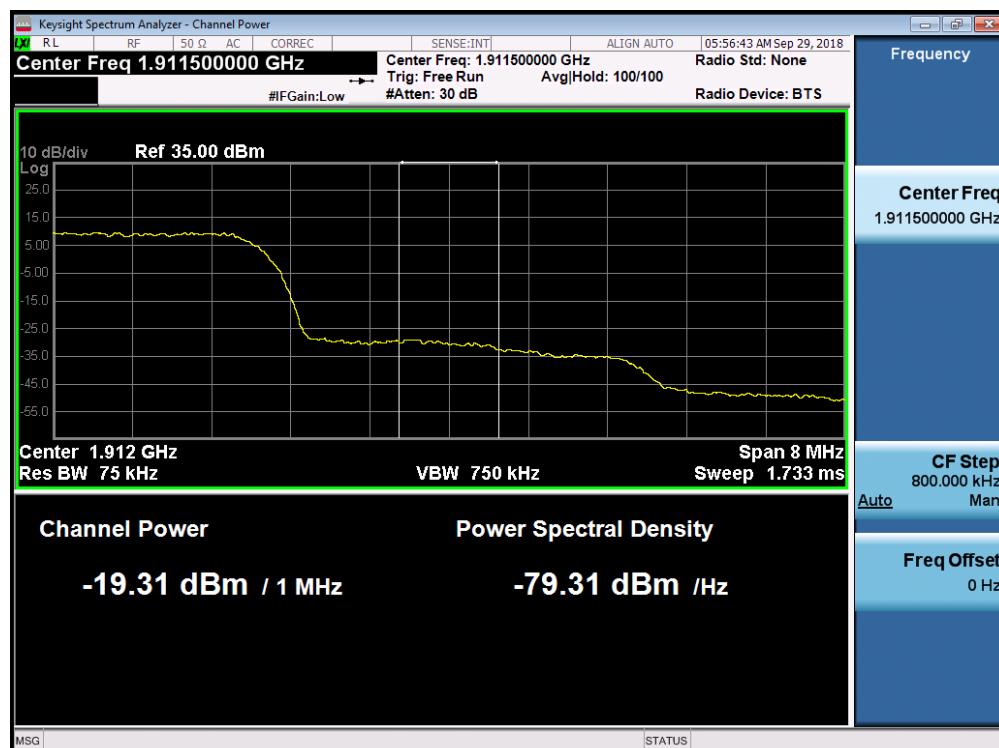

Plot 7-68. 4MHz Span Plot (PCS WCDMA Mode - High Channel)

FCC ID: BCGA1934	PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device		Page 53 of 112

7.5 Peak-Average Ratio

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 5.7.1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
 2. Frequency = carrier center frequency
 3. Measurement BW > Emission bandwidth of signal
 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
 5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal “RF Burst” trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the “on time” of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


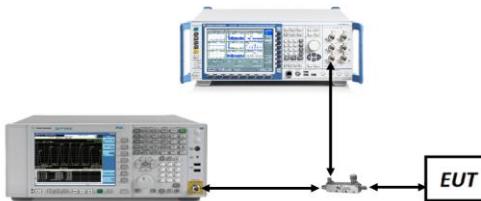


Figure 7-4. Test Instrument & Measurement Setup


Test Notes

1. All ports were tested and only the worst case data were reported.
 2. Refer to Table 2-1 Section 2.3 of this test report for correlation between Antennas and Ports.

FCC ID: BCGA1934		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 54 of 112

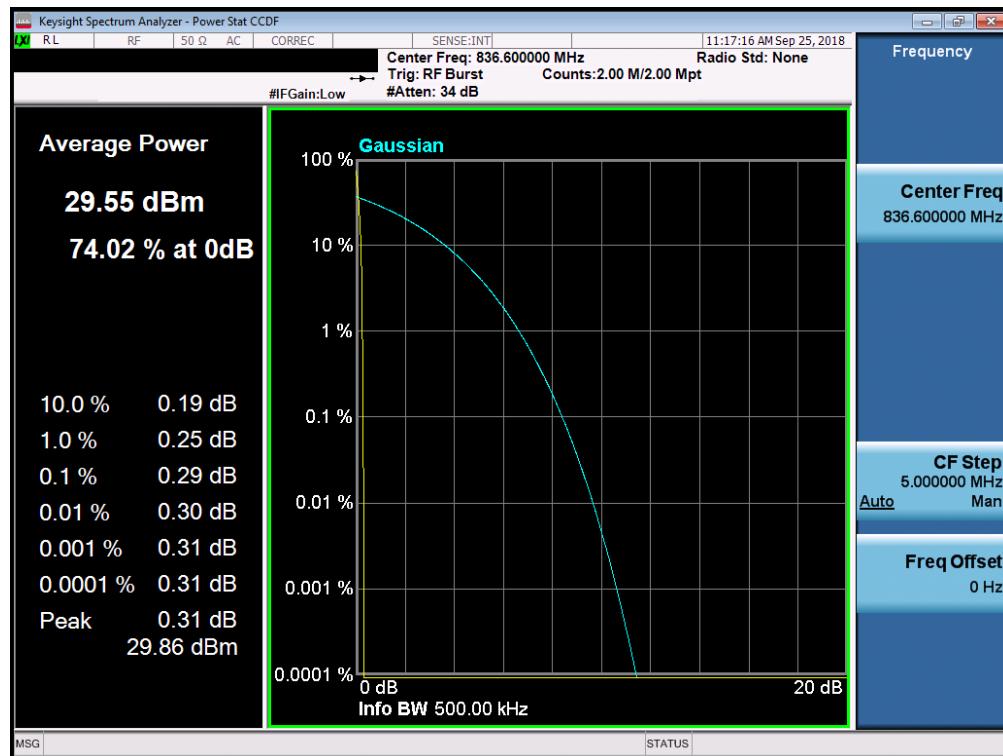


Plot 7-69. Peak-Average Ratio Plot (Cellular GPRS Mode)

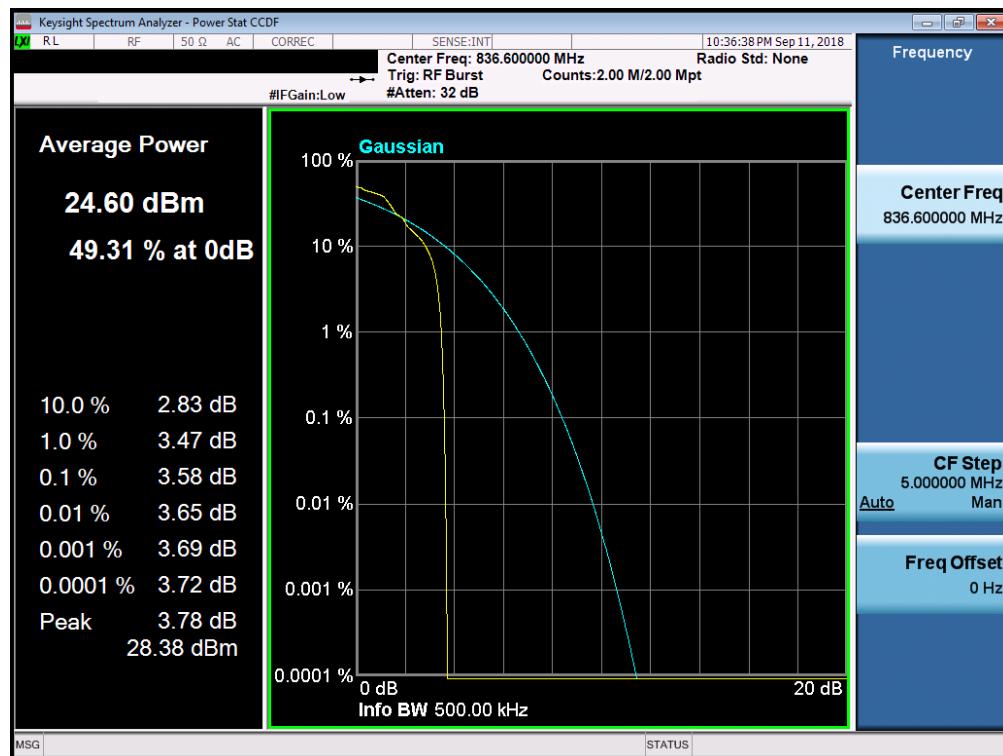


Plot 7-70. Peak-Average Ratio Plot (EDGE850 Mode)

FCC ID: BCGA1934	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device		Page 55 of 112

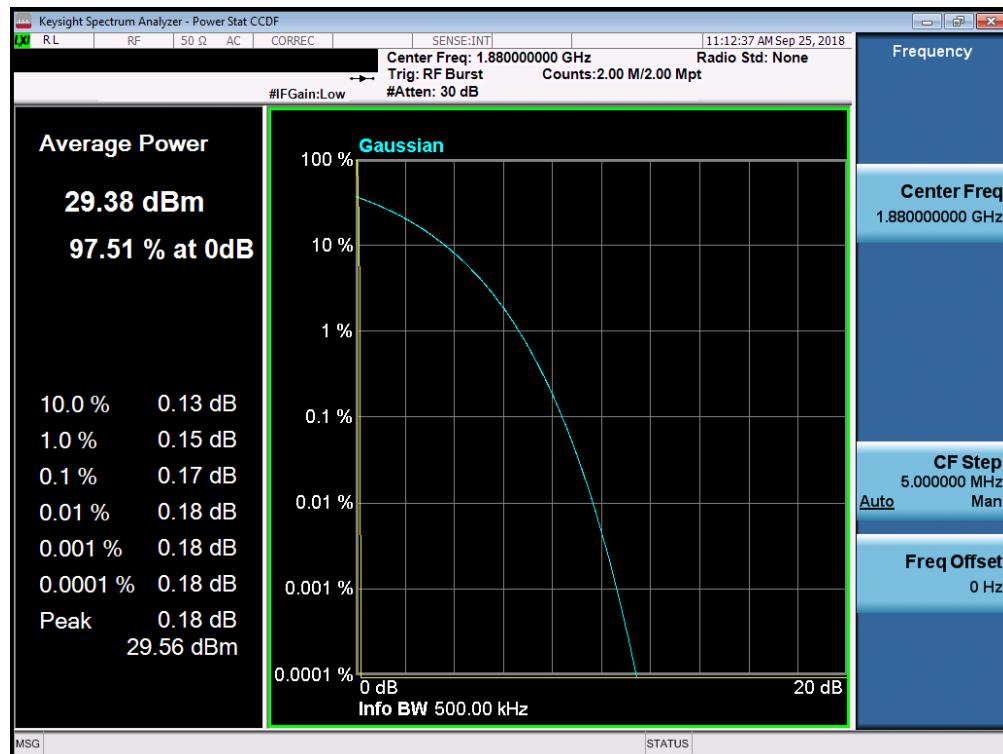


Plot 7-71. Peak-Average Ratio Plot (PCS GPRS Mode)

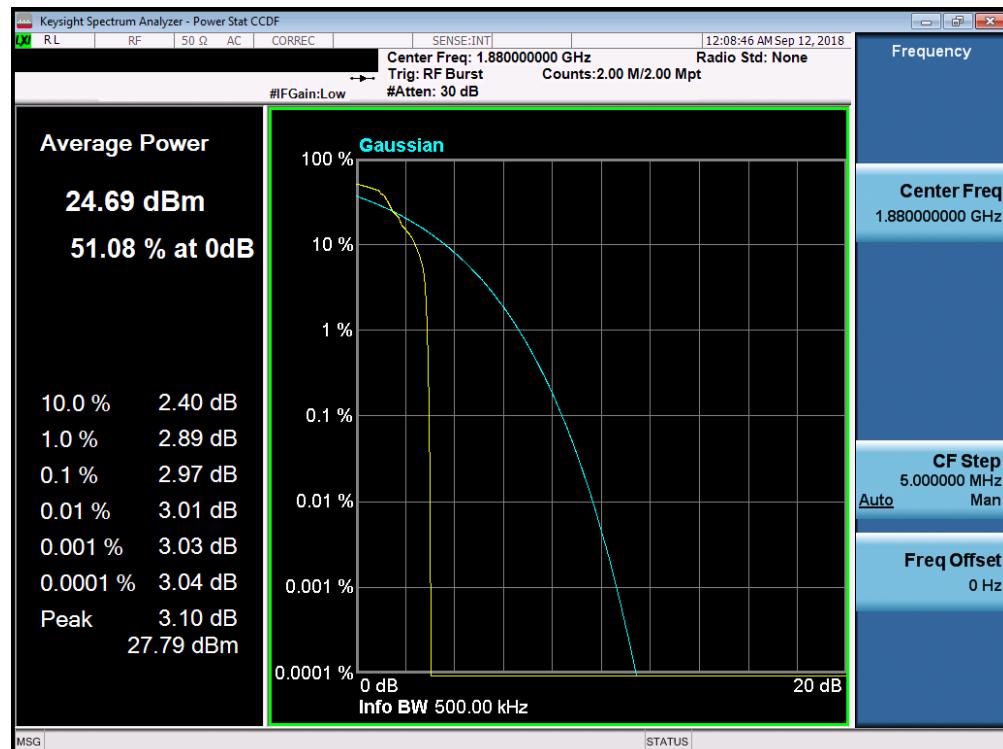


Plot 7-72. Peak-Average Ratio Plot (EDGE1900 Mode)

FCC ID: BCGA1934	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 56 of 112

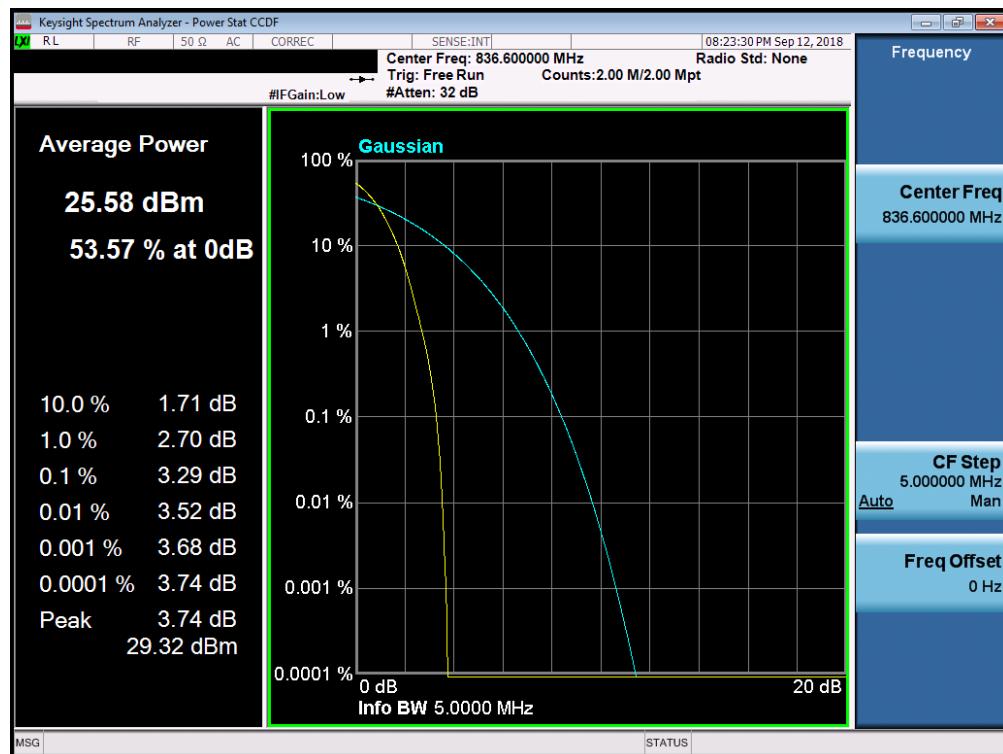


Plot 7-73. Peak-Average Ratio Plot (Cellular WCDMA Mode)

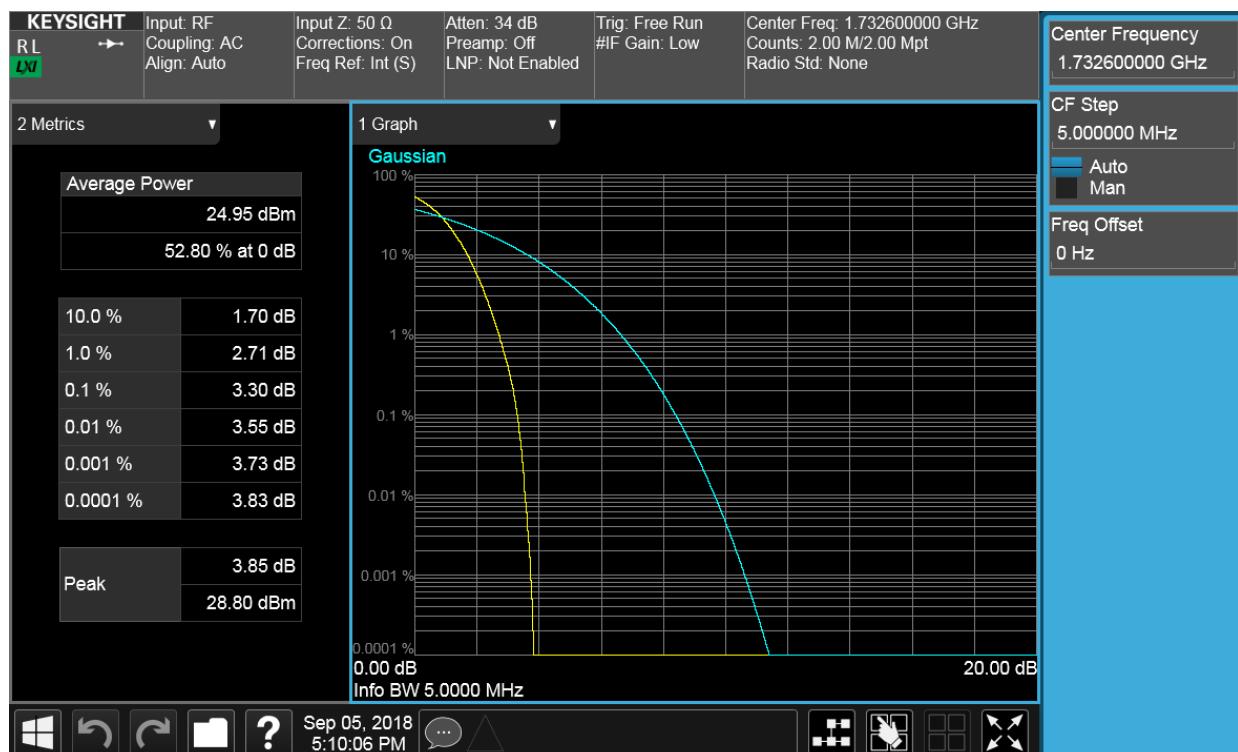

Plot 7-74. Peak-Average Ratio Plot (AWS WCDMA Mode)

FCC ID: BCGA1934	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 57 of 112

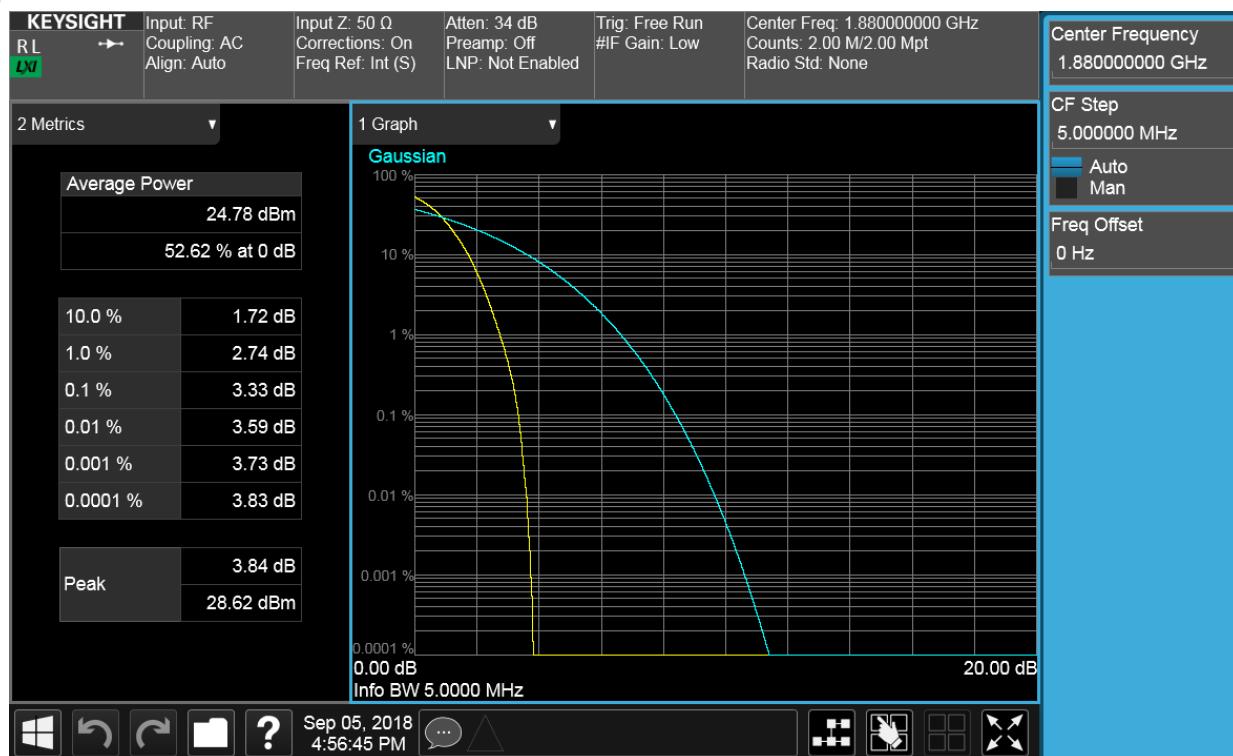

FCC ID: BCGA1934	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 58 of 112

7.6 Radiated Power (ERP/EIRP)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

Test Settings

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured is:

$$\text{ERP/EIRP} = \text{PMes} - \text{LC} + \text{GT}$$

Where:

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMes, typically dBW or dBm)

PMes = measured transmitter output power or PSD, in dBW or dBm

LC = signal attenuation in the connecting cable between the transmitter and antenna in dB

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-5. ERP/EIRP Measurement Setup

FCC ID: BCGA1934	 PCTEST [®] <small>ENGINEERING LABORATORY, INC.</small>		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device		Page 59 of 112

Test Notes

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 3) This unit was tested with its standard battery.
- 4) The Ant. Gains (GT) are listed in dBi.
- 5) Refer to Table 2-1 Section 2.3 of this test report for correlation between Antennas and Ports.

FCC ID: BCGA1934	 PCTEST® ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device		Page 60 of 112

7.6.1 Port A Radiated Power (ERP/EIRP)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
824.20	GPRS850	30.09	-0.60	27.34	0.542	38.45	-11.11	29.49	0.889	40.61	-11.12
836.60	GPRS850	30.07	-0.60	27.32	0.540	38.45	-11.13	29.47	0.885	40.61	-11.14
848.80	GPRS850	30.00	-0.60	27.25	0.531	38.45	-11.20	29.40	0.871	40.61	-11.21
824.20	EDGE850	24.63	-0.60	21.88	0.154	38.45	-16.57	24.03	0.253	40.61	-16.58

Table 7-2. ERP/EIRP (Cellular GPRS)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
826.40	WCDMA850	25.50	-0.60	22.75	0.188	38.45	-15.70	24.90	0.309	40.61	-15.71
836.60	WCDMA850	25.50	-0.60	22.75	0.188	38.45	-15.70	24.90	0.309	40.61	-15.71
846.60	WCDMA850	25.50	-0.60	22.75	0.188	38.45	-15.70	24.90	0.309	40.61	-15.71

Table 7-3. ERP/EIRP (Cellular WCDMA)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1712.40	WCDMA1700	25.49	-2.00	23.49	0.223	30.00	-6.51
1732.60	WCDMA1700	25.44	-2.00	23.44	0.221	30.00	-6.56
1752.60	WCDMA1700	25.37	-2.00	23.37	0.217	30.00	-6.63

Table 7-4. EIRP (AWS WCDMA)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GPRS1900	30.20	-2.10	28.10	0.646	33.01	-4.91
1880.00	GPRS1900	30.15	-2.10	28.05	0.638	33.01	-4.96
1909.80	GPRS1900	30.10	-2.10	28.00	0.631	33.01	-5.01
1850.20	EDGE1900	25.25	-2.10	23.15	0.207	33.01	-9.86

Table 7-5. EIRP (PCS GPRS)

FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)					Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device					

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	25.50	-2.10	23.40	0.219	33.01	-9.61
1880.00	WCDMA1900	25.31	-2.10	23.21	0.209	33.01	-9.80
1907.60	WCDMA1900	25.49	-2.10	23.39	0.218	33.01	-9.62

Table 7-6. EIRP (PCS WCDMA)

FCC ID: BCGA1934	 PCTEST® <small>ENGINEERING LABORATORY, INC.</small>			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device			

7.6.2 Port B Radiated Power (ERP/EIRP)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
824.20	GPRS850	27.47	-3.10	22.22	0.167	38.45	-16.23	24.37	0.274	40.61	-16.24
836.60	GPRS850	27.31	-3.10	22.06	0.161	38.45	-16.39	24.21	0.264	40.61	-16.40
848.80	GPRS850	27.32	-3.10	22.07	0.161	38.45	-16.38	24.22	0.264	40.61	-16.39
824.20	EDGE850	21.88	-3.10	16.63	0.046	38.45	-21.82	18.78	0.076	40.61	-21.83

Table 7-7. ERP/EIRP (Cellular GPRS)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
826.40	WCDMA850	23.74	-3.10	18.49	0.071	38.45	-19.96	20.64	0.116	40.61	-19.97
836.60	WCDMA850	23.73	-3.10	18.48	0.070	38.45	-19.97	20.63	0.116	40.61	-19.98
846.60	WCDMA850	23.75	-3.10	18.50	0.071	38.45	-19.95	20.65	0.116	40.61	-19.96

Table 7-8. ERP/EIRP (Cellular WCDMA)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1712.40	WCDMA1700	22.24	-2.00	20.24	0.106	30.00	-9.76
1732.50	WCDMA1700	22.23	-2.00	20.23	0.105	30.00	-9.77
1752.50	WCDMA1700	22.15	-2.00	20.15	0.104	30.00	-9.85

Table 7-9. EIRP (AWS WCDMA)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GPRS1900	26.74	-2.10	24.64	0.291	33.01	-8.37
1880.00	GPRS1900	26.72	-2.10	24.62	0.290	33.01	-8.39
1909.80	GPRS1900	26.67	-2.10	24.57	0.286	33.01	-8.44
1850.20	EDGE1900	21.62	-2.10	19.52	0.090	33.01	-13.49

Table 7-10. EIRP (PCS GPRS)

FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)					Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device					

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	22.20	-2.10	20.10	0.102	33.01	-12.91
1880.00	WCDMA1900	22.14	-2.10	20.04	0.101	33.01	-12.97
1907.60	WCDMA1900	22.07	-2.10	19.97	0.099	33.01	-13.04

Table 7-11. EIRP (PCS WCDMA)

FCC ID: BCGA1934	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 64 of 112	

7.6.3 Port C Radiated Power (ERP/EIRP)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1712.40	WCDMA1700	24.49	-2.40	22.09	0.162	30.00	-7.91
1732.50	WCDMA1700	24.50	-2.40	22.10	0.162	30.00	-7.90
1752.50	WCDMA1700	24.45	-2.40	22.05	0.160	30.00	-7.95

Table 7-12. EIRP (AWS WCDMA)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GPRS1900	29.25	-1.80	27.45	0.556	33.01	-5.56
1880.00	GPRS1900	29.20	-1.80	27.40	0.550	33.01	-5.61
1909.80	GPRS1900	29.21	-1.80	27.41	0.551	33.01	-5.60
1850.20	EDGE1900	24.14	-1.80	22.34	0.171	33.01	-10.67

Table 7-13. EIRP (PCS GPRS)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	24.49	-1.80	22.69	0.186	33.01	-10.32
1880.00	WCDMA1900	24.39	-1.80	22.59	0.182	33.01	-10.42
1907.60	WCDMA1900	24.40	-1.80	22.60	0.182	33.01	-10.41

Table 7-14. EIRP (PCS WCDMA)

FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)				Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device				Page 65 of 112

7.6.4 Port D Radiated Power (ERP/EIRP)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1712.40	WCDMA1700	21.98	-1.50	20.48	0.112	30.00	-9.52
1732.50	WCDMA1700	21.97	-1.50	20.47	0.111	30.00	-9.53
1752.50	WCDMA1700	21.83	-1.50	20.33	0.108	30.00	-9.67

Table 7-15. EIRP (AWS WCDMA)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GPRS1900	26.75	-0.60	26.15	0.412	33.01	-6.86
1880.00	GPRS1900	26.75	-0.60	26.15	0.412	33.01	-6.86
1909.80	GPRS1900	26.75	-0.60	26.15	0.412	33.01	-6.86
1850.20	EDGE1900	21.75	-0.60	21.15	0.130	33.01	-11.86

Table 7-16. EIRP (PCS GPRS)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	21.98	-0.60	21.38	0.137	33.01	-11.63
1880.00	WCDMA1900	21.89	-0.60	21.29	0.135	33.01	-11.72
1907.60	WCDMA1900	21.87	-0.60	21.27	0.134	33.01	-11.74

Table 7-17. EIRP (PCS WCDMA)

FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)				Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device				Page 66 of 112

7.7 Radiated Spurious Emissions Measurements

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW \geq 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points \geq 2 x span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 67 of 112	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

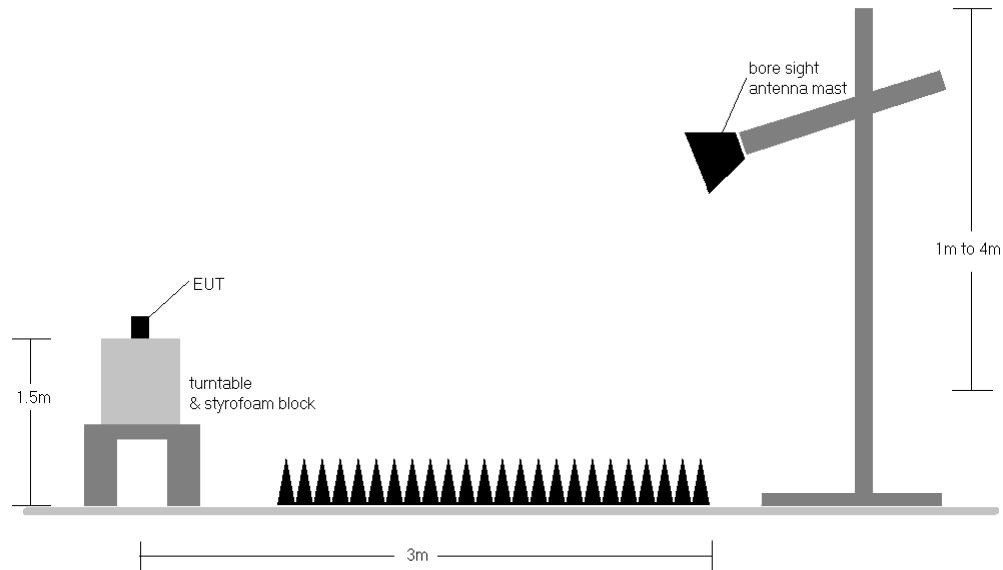


Figure 7-6. Test Instrument & Measurement Setup

Test Notes

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 3) This unit was tested with its standard battery.
- 4) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 5) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 6) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 7) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: BCGA1934	 PCTEST® ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 68 of 112	
© 2018 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM .	V 8.4 08/10/2018			

7.7.1 ANT 3 (Port A) Radiated Spurious Emissions Measurements

Cellular GPRS Mode

OPERATING FREQUENCY:	824.20	MHz
CHANNEL:	128	
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1648.40	H	156	299	-65.65	4.48	-61.18	-48.2
2472.60	H	390	197	-60.02	5.58	-54.44	-41.4
3296.80	H	143	206	-63.91	7.22	-56.69	-43.7

Table 7-18. Radiated Spurious Data (Cellular GPRS Mode – Ch. 128)

OPERATING FREQUENCY:	836.60	MHz
CHANNEL:	190	
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	H	353	145	-66.44	4.46	-61.98	-49.0
2509.80	H	120	148	-59.18	5.62	-53.56	-40.6
3346.40	H	165	255	-64.15	7.24	-56.91	-43.9

Table 7-19. Radiated Spurious Data (Cellular GPRS Mode – Ch. 190)

FCC ID: BCGA1934	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 69 of 112

OPERATING FREQUENCY:	848.80	MHz
CHANNEL:	251	
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1697.60	H	304	298	-66.26	4.44	-61.82	-48.8
2546.40	H	156	229	-58.32	5.68	-52.64	-39.6
3395.20	H	199	195	-63.74	7.26	-56.48	-43.5

Table 7-20. Radiated Spurious Data (Cellular GPRS Mode – Ch. 251)

FCC ID: BCGA1934	 PCTEST® <small>ENGINEERING LABORATORY, INC.</small>	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 70 of 112

Cellular WCDMA Mode

OPERATING FREQUENCY:	826.40	MHz
CHANNEL:	4132	
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1652.80	H	-	-	-66.38	4.47	-61.91	-48.9
2479.20	H	-	-	-64.86	5.58	-59.27	-46.3
3305.60	H	-	-	-63.60	7.22	-56.38	-43.4

Table 7-21. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4132)

OPERATING FREQUENCY:	836.60	MHz
CHANNEL:	4183	
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	H	-	-	-65.79	4.46	-61.33	-48.3
2509.80	H	-	-	-64.20	5.62	-58.58	-45.6
3346.40	H	-	-	-63.59	7.24	-56.35	-43.4

Table 7-22. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4183)

FCC ID: BCGA1934	 PCTEST® <small>ENGINEERING LABORATORY, INC.</small>	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 71 of 112

OPERATING FREQUENCY:	846.60	MHz
CHANNEL:	4233	
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1693.20	H	-	-	-66.33	4.44	-61.89	-48.9
2539.80	H	-	-	-65.61	5.67	-59.95	-46.9
3386.40	H	-	-	-64.55	7.26	-57.30	-44.3

Table 7-23. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4233)

FCC ID: BCGA1934	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 72 of 112

7.7.2 ANT 4b (Port A) Radiated Spurious Emissions Measurements

AWS WCDMA Mode

OPERATING FREQUENCY:	1712.40	MHz
CHANNEL:	1312	
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3424.80	H	-	-	-73.59	7.27	-66.32	-53.3
5137.20	H	-	-	-71.01	7.92	-63.08	-50.1
6849.60	H	-	-	-67.83	8.84	-58.99	-46.0

Table 7-24. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1312)

OPERATING FREQUENCY:	1732.60	MHz
CHANNEL:	1413	
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3465.20	H	-	-	-74.09	7.29	-66.80	-53.8
5197.80	H	-	-	-71.28	7.80	-63.47	-50.5
6930.40	H	-	-	-67.77	9.04	-58.73	-45.7

Table 7-25. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1413)

FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 73 of 112

OPERATING FREQUENCY:	1752.60	MHz
CHANNEL:	1513	
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3505.20	H	-	-	-73.68	7.30	-66.38	-53.4
5257.80	H	-	-	-71.06	7.72	-63.33	-50.3
7010.40	H	-	-	-67.71	9.20	-58.51	-45.5

Table 7-26. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1513)

FCC ID: BCGA1934	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 74 of 112

PCS GPRS Mode

OPERATING FREQUENCY:	1850.20	MHz
CHANNEL:	512	
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3700.40	H	-	-	-69.92	7.22	-62.70	-49.7
5550.60	H	-	-	-68.68	8.32	-60.36	-47.4
7400.80	H	-	-	-63.52	9.50	-54.01	-41.0

Table 7-27. Radiated Spurious Data (PCS GPRS Mode – Ch. 512)

OPERATING FREQUENCY:	1880.00	MHz
CHANNEL:	661	
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	-	-	-69.97	7.23	-62.74	-49.7
5640.00	H	-	-	-67.42	8.17	-59.25	-46.2
7520.00	H	-	-	-63.82	9.69	-54.13	-41.1

Table 7-28. Radiated Spurious Data (PCS GPRS Mode – Ch. 661)

FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 75 of 112

OPERATING FREQUENCY:	1909.80	MHz
CHANNEL:	810	
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3819.60	H	-	-	-69.66	7.40	-62.26	-49.3
5729.40	H	-	-	-66.97	8.03	-58.93	-45.9
7639.20	H	-	-	-64.44	9.64	-54.79	-41.8

Table 7-29. Radiated Spurious Data (PCS GPRS Mode – Ch. 810)

FCC ID: BCGA1934	 PCTEST® <small>ENGINEERING LABORATORY, INC.</small>	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 76 of 112

PCS WCDMA Mode

OPERATING FREQUENCY:	1852.40	MHz
CHANNEL:	9262	
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3704.80	H	-	-	-72.41	7.22	-65.19	-52.2
5557.20	H	-	-	-71.26	8.31	-62.95	-50.0
7409.60	H	-	-	-67.33	9.52	-57.81	-44.8

Table 7-30. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)

OPERATING FREQUENCY:	1880.00	MHz
CHANNEL:	9400	
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	-	-	-72.80	7.23	-65.57	-52.6
5640.00	H	-	-	-69.17	8.17	-61.00	-48.0
7520.00	H	-	-	-68.20	9.69	-58.51	-45.5

Table 7-31. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)

FCC ID: BCGA1934	 PCTEST <small>ENGINEERING LABORATORY, INC.</small>	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 77 of 112

OPERATING FREQUENCY:	1907.60	MHz
CHANNEL:	9538	
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3815.20	H	-	-	-71.66	7.39	-64.28	-51.3
5722.80	H	-	-	-69.65	8.04	-61.60	-48.6
7630.40	H	-	-	-67.96	9.65	-58.31	-45.3

Table 7-32. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)

FCC ID: BCGA1934	 PCTEST® <small>ENGINEERING LABORATORY, INC.</small>	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 78 of 112

7.7.3 ANT 1 (Port B) Radiated Spurious Emissions Measurements

Cellular GPRS Mode

OPERATING FREQUENCY:	824.20	MHz
CHANNEL:	128	
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1648.40	H	185	8	-65.98	4.48	-61.51	-48.5
2472.60	H	147	311	-64.70	5.58	-59.12	-46.1
3296.80	H	-	-	-63.19	7.22	-55.97	-43.0

Table 7-33. Radiated Spurious Data (Cellular GPRS Mode – Ch. 128)

OPERATING FREQUENCY:	836.60	MHz
CHANNEL:	190	
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	H	158	55	-65.16	4.46	-60.70	-47.7
2509.80	H	212	114	-65.34	5.62	-59.72	-46.7
3346.40	H	-	-	-63.52	7.24	-56.28	-43.3

Table 7-34. Radiated Spurious Data (Cellular GPRS Mode – Ch. 190)

FCC ID: BCGA1934	 PCTEST® <small>ENGINEERING LABORATORY, INC.</small>	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 79 of 112

OPERATING FREQUENCY:	848.80	MHz
CHANNEL:	251	
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1697.60	H	115	55	-66.16	4.44	-61.72	-48.7
2546.40	H	398	275	-64.93	5.68	-59.25	-46.3
3395.20	H	-	-	-63.68	7.26	-56.42	-43.4

Table 7-35. Radiated Spurious Data (Cellular GPRS Mode – Ch. 251)

FCC ID: BCGA1934	 PCTEST® <small>ENGINEERING LABORATORY, INC.</small>	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 80 of 112

Cellular WCDMA Mode

OPERATING FREQUENCY:	826.40	MHz
CHANNEL:	4132	
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1652.80	H	-	-	-66.28	4.47	-61.81	-48.8
2479.20	H	-	-	-64.47	5.58	-58.88	-45.9
3305.60	H	-	-	-63.54	7.22	-56.32	-43.3

Table 7-36. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4132)

OPERATING FREQUENCY:	836.60	MHz
CHANNEL:	4183	
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	H	-	-	-65.16	4.46	-60.70	-47.7
2509.80	H	-	-	-65.34	5.62	-59.72	-46.7
3346.40	H	-	-	-63.52	7.24	-56.28	-43.3

Table 7-37. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4183)

FCC ID: BCGA1934	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 81 of 112

OPERATING FREQUENCY:	846.60	MHz
CHANNEL:	4233	
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1693.20	H	-	-	-66.01	4.44	-61.57	-48.6
2539.80	H	-	-	-65.31	5.67	-59.65	-46.6
3386.40	H	-	-	-64.27	7.26	-57.02	-44.0

Table 7-38. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4233)

FCC ID: BCGA1934	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 82 of 112

7.7.4 ANT 2b (Port B) Radiated Spurious Emissions Measurements

AWS WCDMA Mode

OPERATING FREQUENCY:	1712.40	MHz
CHANNEL:	1312	
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3424.80	H	-	-	-73.50	7.27	-66.23	-53.2
5137.20	H	-	-	-70.63	7.92	-62.70	-49.7
6849.60	H	-	-	-68.27	8.84	-59.43	-46.4

Table 7-39. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1312)

OPERATING FREQUENCY:	1732.60	MHz
CHANNEL:	1413	
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3465.20	H	-	-	-74.10	7.29	-66.81	-53.8
5197.80	H	-	-	-70.95	7.80	-63.14	-50.1
6930.40	H	-	-	-67.65	9.04	-58.61	-45.6

Table 7-40. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1413)

FCC ID: BCGA1934	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 83 of 112

OPERATING FREQUENCY:	1752.60	MHz
CHANNEL:	1513	
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3505.20	H	-	-	-73.22	7.30	-65.92	-52.9
5257.80	H	-	-	-70.68	7.72	-62.95	-50.0
7010.40	H	-	-	-68.38	9.20	-59.18	-46.2

Table 7-41. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1513)

FCC ID: BCGA1934	 PCTEST® <small>ENGINEERING LABORATORY, INC.</small>	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 84 of 112

PCS GPRS Mode

OPERATING FREQUENCY:	1850.20	MHz
CHANNEL:	512	
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3700.40	H	-	-	-70.54	7.22	-63.32	-50.3
5550.60	H	-	-	-70.73	8.32	-62.41	-49.4
7400.80	H	-	-	-63.57	9.50	-54.06	-41.1

Table 7-42. Radiated Spurious Data (PCS GPRS Mode – Ch. 512)

OPERATING FREQUENCY:	1880.00	MHz
CHANNEL:	661	
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	-	-	-69.81	7.23	-62.58	-49.6
5640.00	H	-	-	-68.39	8.17	-60.22	-47.2
7520.00	H	-	-	-64.00	9.69	-54.31	-41.3

Table 7-43. Radiated Spurious Data (PCS GPRS Mode – Ch. 661)

FCC ID: BCGA1934	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 85 of 112

OPERATING FREQUENCY:	1909.80	MHz
CHANNEL:	810	
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3819.60	H	-	-	-70.77	7.40	-63.37	-50.4
5729.40	H	-	-	-67.14	8.03	-59.10	-46.1
7639.20	H	-	-	-65.81	9.64	-56.16	-43.2

Table 7-44. Radiated Spurious Data (PCS GPRS Mode – Ch. 810)

FCC ID: BCGA1934	 PCTEST® <small>ENGINEERING LABORATORY, INC.</small>	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 86 of 112

PCS WCDMA Mode

OPERATING FREQUENCY:	1852.40	MHz
CHANNEL:	9262	
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3704.80	H	-	-	-72.87	7.22	-65.65	-52.6
5557.20	H	-	-	-70.68	8.31	-62.37	-49.4
7409.60	H	-	-	-67.43	9.52	-57.91	-44.9

Table 7-45. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)

OPERATING FREQUENCY:	1880.00	MHz
CHANNEL:	9400	
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	-	-	-72.43	7.23	-65.20	-52.2
5640.00	H	-	-	-70.19	8.17	-62.02	-49.0
7520.00	H	-	-	-68.03	9.69	-58.34	-45.3

Table 7-46. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)

FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 87 of 112

OPERATING FREQUENCY:	1907.60	MHz
CHANNEL:	9538	
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3815.20	H	-	-	-72.46	7.39	-65.08	-52.1
5722.80	H	-	-	-69.64	8.04	-61.59	-48.6
7630.40	H	-	-	-67.99	9.65	-58.34	-45.3

Table 7-47. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)

FCC ID: BCGA1934	 PCTEST® <small>ENGINEERING LABORATORY, INC.</small>	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 88 of 112

7.7.5 ANT 4a (Port C) Radiated Spurious Emissions Measurements AWS WCDMA Mode

OPERATING FREQUENCY:	1712.40	MHz
CHANNEL:	1312	
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3424.80	H	-	-	-74.00	7.27	-66.73	-53.7
5137.20	H	-	-	-71.16	7.92	-63.23	-50.2
6849.60	H	-	-	-68.19	8.84	-59.35	-46.3

Table 7-48. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1312)

OPERATING FREQUENCY:	1732.60	MHz
CHANNEL:	1413	
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3465.20	H	-	-	-73.95	7.29	-66.66	-53.7
5197.80	H	-	-	-70.80	7.80	-62.99	-50.0
6930.40	H	-	-	-68.02	9.04	-58.98	-46.0

Table 7-49. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1413)

FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 89 of 112

OPERATING FREQUENCY: 1752.60 MHz

CHANNEL: 1513

DISTANCE: 3 meters

LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3505.20	H	-	-	-73.29	7.30	-65.99	-53.0
5257.80	H	-	-	-70.89	7.72	-63.16	-50.2
7010.40	H	-	-	-68.43	9.20	-59.23	-46.2

Table 7-50. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1513)

FCC ID: BCGA1934	 PCTEST® <small>ENGINEERING LABORATORY, INC.</small>			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device			

PCS GPRS Mode

OPERATING FREQUENCY: 1850.20 MHz
 CHANNEL: 512
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3700.40	H	-	-	-69.68	7.22	-62.46	-49.5
5550.60	H	-	-	-68.72	8.32	-60.40	-47.4
7400.80	H	-	-	-63.30	9.50	-53.79	-40.8

Table 7-51. Radiated Spurious Data (PCS GPRS Mode – Ch. 512)

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 661
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	-	-	-71.05	7.23	-63.82	-50.8
5640.00	H	-	-	-67.08	8.17	-58.91	-45.9
7520.00	H	-	-	-63.51	9.69	-53.82	-40.8

Table 7-52. Radiated Spurious Data (PCS GPRS Mode – Ch. 661)

FCC ID: BCGA1934	 PCTEST® <small>ENGINEERING LABORATORY, INC.</small>	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device		Page 91 of 112

OPERATING FREQUENCY: 1909.80 MHz

CHANNEL: 810

DISTANCE: 3 meters

LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3819.60	H	-	-	-72.72	7.40	-65.32	-52.3
5729.40	H	-	-	-66.94	8.03	-58.90	-45.9
7639.20	H	-	-	-64.51	9.64	-54.86	-41.9

Table 7-53. Radiated Spurious Data (PCS GPRS Mode – Ch. 810)

FCC ID: BCGA1934	 PCTEST® <small>ENGINEERING LABORATORY, INC.</small>			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device			

PCS WCDMA Mode

OPERATING FREQUENCY:	1852.40	MHz
CHANNEL:	9262	
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3704.80	H	-	-	-71.61	7.22	-64.39	-51.4
5557.20	H	-	-	-70.52	8.31	-62.21	-49.2
7409.60	H	-	-	-67.53	9.52	-58.01	-45.0

Table 7-54. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)

OPERATING FREQUENCY:	1880.00	MHz
CHANNEL:	9400	
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	-	-	-72.09	7.23	-64.86	-51.9
5640.00	H	-	-	-70.27	8.17	-62.10	-49.1
7520.00	H	-	-	-67.90	9.69	-58.21	-45.2

Table 7-55. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)

FCC ID: BCGA1934	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 93 of 112

OPERATING FREQUENCY: 1907.60 MHz
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3815.20	H	-	-	-72.75	7.39	-65.37	-52.4
5722.80	H	-	-	-69.35	8.04	-61.30	-48.3
7630.40	H	-	-	-68.00	9.65	-58.35	-45.4

Table 7-56. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)

FCC ID: BCGA1934	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 94 of 112	

7.7.6 ANT 2a (Port D) Radiated Spurious Emissions Measurements AWS WCDMA Mode

OPERATING FREQUENCY:	1712.40	MHz
CHANNEL:	1312	
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3424.80	H	-	-	-73.87	7.27	-66.60	-53.6
5137.20	H	-	-	-70.88	7.92	-62.95	-50.0
6849.60	H	-	-	-68.17	8.84	-59.33	-46.3

Table 7-57. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1312)

OPERATING FREQUENCY:	1732.60	MHz
CHANNEL:	1413	
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3465.20	H	-	-	-74.21	7.29	-66.92	-53.9
5197.80	H	-	-	-70.86	7.80	-63.05	-50.1
6930.40	H	-	-	-68.13	9.04	-59.09	-46.1

Table 7-58. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1413)

FCC ID: BCGA1934	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 95 of 112

OPERATING FREQUENCY:	1752.60	MHz
CHANNEL:	1513	
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3505.20	H	-	-	-73.08	7.30	-65.78	-52.8
5257.80	H	-	-	-70.86	7.72	-63.13	-50.1
7010.40	H	-	-	-68.23	9.20	-59.03	-46.0

Table 7-59. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1513)

FCC ID: BCGA1934	 PCTEST® <small>ENGINEERING LABORATORY, INC.</small>			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device			

PCS GPRS Mode

OPERATING FREQUENCY:	1850.20	MHz
CHANNEL:	512	
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3700.40	H	-	-	-70.16	7.22	-62.94	-49.9
5550.60	H	-	-	-67.94	8.32	-59.62	-46.6
7400.80	H	-	-	-63.98	9.50	-54.47	-41.5

Table 7-60. Radiated Spurious Data (PCS GPRS Mode – Ch. 512)

OPERATING FREQUENCY:	1880.00	MHz
CHANNEL:	661	
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	-	-	-70.42	7.23	-63.19	-50.2
5640.00	H	-	-	-67.29	8.17	-59.12	-46.1
7520.00	H	-	-	-63.96	9.69	-54.27	-41.3

Table 7-61. Radiated Spurious Data (PCS GPRS Mode – Ch. 661)

FCC ID: BCGA1934	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device			

OPERATING FREQUENCY:	1909.80	MHz
CHANNEL:	810	
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3819.60	H	-	-	-70.17	7.40	-62.77	-49.8
5729.40	H	-	-	-67.16	8.03	-59.12	-46.1
7639.20	H	-	-	-64.44	9.64	-54.79	-41.8

Table 7-62. Radiated Spurious Data (PCS GPRS Mode – Ch. 810)

FCC ID: BCGA1934	 PCTEST® <small>ENGINEERING LABORATORY, INC.</small>	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 98 of 112

PCS WCDMA Mode

OPERATING FREQUENCY:	1852.40	MHz
CHANNEL:	9262	
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3704.80	H	-	-	-72.36	7.22	-65.14	-52.1
5557.20	H	-	-	-70.95	8.31	-62.64	-49.6
7409.60	H	-	-	-67.45	9.52	-57.93	-44.9

Table 7-63. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)

OPERATING FREQUENCY:	1880.00	MHz
CHANNEL:	9400	
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	-	-	-72.92	7.23	-65.69	-52.7
5640.00	H	-	-	-70.60	8.17	-62.43	-49.4
7520.00	H	-	-	-67.82	9.69	-58.13	-45.1

Table 7-64. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)

FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 99 of 112

OPERATING FREQUENCY: 1907.60 MHz
 CHANNEL: 9538
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3815.20	H	-	-	-72.09	7.39	-64.71	-51.7
5722.80	H	-	-	-69.41	8.04	-61.36	-48.4
7630.40	H	-	-	-67.95	9.65	-58.30	-45.3

Table 7-65. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)

FCC ID: BCGA1934	 PCTEST® <small>ENGINEERING LABORATORY, INC.</small>			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device			

7.8 Frequency Stability / Temperature Variation

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, RSS-132, and RSS-133, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5 \text{ ppm}$) of the center frequency. For Part 24, Part 27, and RSS-139, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI/TIA-603-E-2016

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

FCC ID: BCGA1934	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 101 of 112

Frequency Stability / Temperature Variation

OPERATING FREQUENCY:	836,600,000	Hz
CHANNEL:	190	
REFERENCE VOLTAGE:	3.80	VDC
DEVIATION LIMIT:	± 0.00025 % or 2.5 ppm	

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	836,600,016	16	0.0000019
100 %		- 20	836,600,006	6	0.0000007
100 %		- 10	836,600,006	6	0.0000007
100 %		0	836,600,004	4	0.0000005
100 %		+ 10	836,600,005	5	0.0000006
100 %		+ 20	836,600,004	4	0.0000005
100 %		+ 30	836,600,004	4	0.0000004
100 %		+ 40	836,600,005	5	0.0000006
100 %		+ 50	836,600,004	4	0.0000005
BATT. ENDPOINT	3.40	+ 20	836,600,005	5	0.0000006

Table 7-66. Frequency Stability Data (Cellular GPRS Mode – Ch. 190)

FCC ID: BCGA1934	 PCTEST® <small>ENGINEERING LABORATORY, INC.</small>	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device		Page 102 of 112

Frequency Stability / Temperature Variation

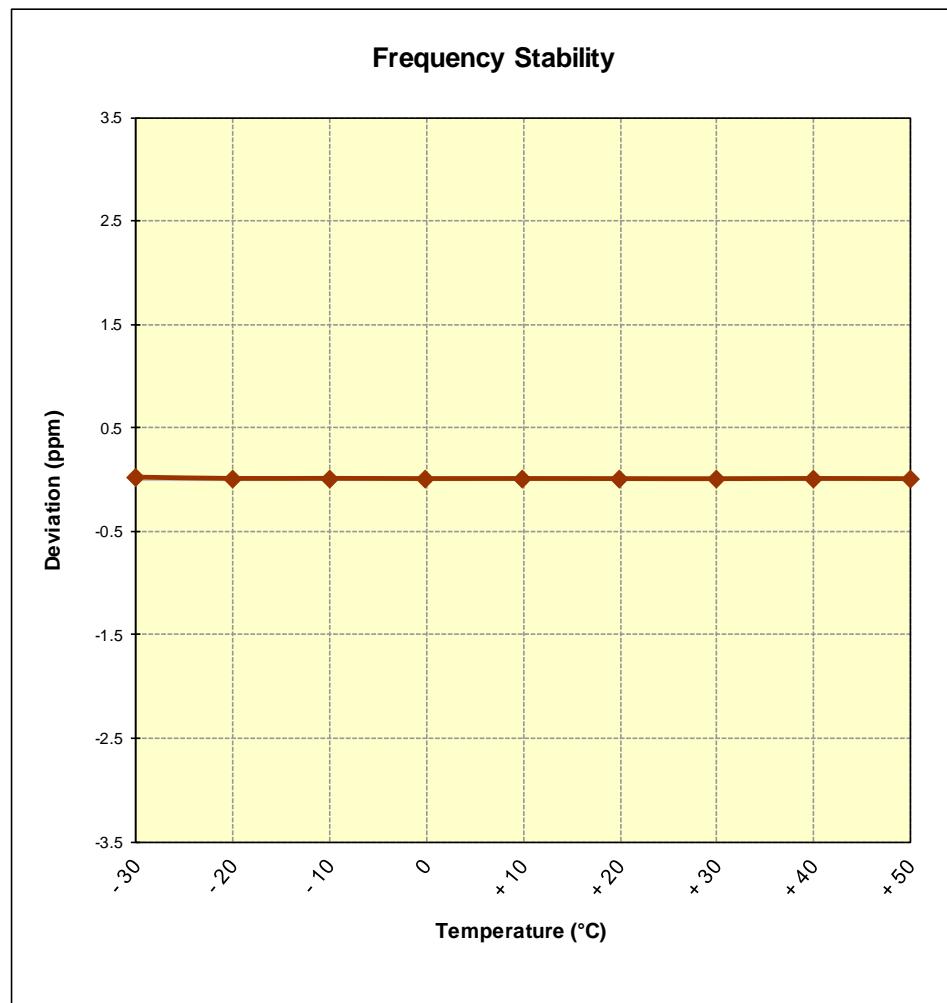


Figure 7-7. Frequency Stability Graph (Cellular GPRS Mode – Ch. 190)

FCC ID: BCGA1934	 PCTEST® ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 103 of 112	

Frequency Stability / Temperature Variation

OPERATING FREQUENCY:	836,600,000	Hz
CHANNEL:	4183	
REFERENCE VOLTAGE:	3.80	VDC
DEVIATION LIMIT:	± 0.00025 % or 2.5 ppm	

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	836,600,008	8	0.0000010
100 %		- 20	836,600,006	6	0.0000007
100 %		- 10	836,600,003	3	0.0000003
100 %		0	836,600,003	3	0.0000004
100 %		+ 10	836,600,004	4	0.0000004
100 %		+ 20	836,600,006	6	0.0000007
100 %		+ 30	836,600,005	5	0.0000005
100 %		+ 40	836,600,002	2	0.0000003
100 %		+ 50	836,600,004	4	0.0000005
BATT. ENDPOINT	3.40	+ 20	836,600,005	5	0.0000006

Table 7-67. Frequency Stability Data (Cellular WCDMA Mode – Ch. 4183)

FCC ID: BCGA1934	 PCTEST® <small>ENGINEERING LABORATORY, INC.</small>	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device		Page 104 of 112

Frequency Stability / Temperature Variation

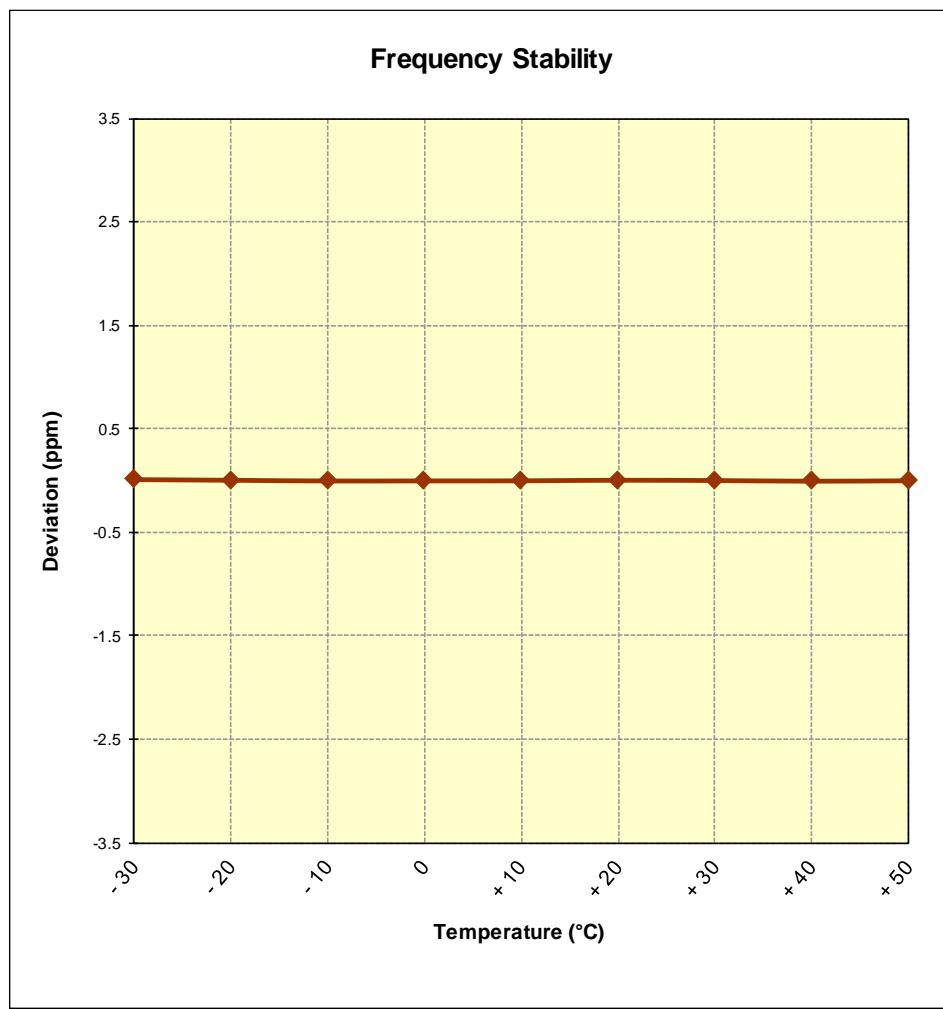


Figure 7-8. Frequency Stability Graph (Cellular WCDMA Mode – Ch. 4183)

FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 105 of 112	

Frequency Stability / Temperature Variation

OPERATING FREQUENCY:	1,732,600,000	Hz
CHANNEL:	1413	
REFERENCE VOLTAGE:	3.80	VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	1,732,600,007	7	0.0000004
100 %		- 20	1,732,600,005	5	0.0000003
100 %		- 10	1,732,600,008	8	0.0000004
100 %		0	1,732,600,004	4	0.0000002
100 %		+ 10	1,732,600,004	4	0.0000002
100 %		+ 20	1,732,600,005	5	0.0000003
100 %		+ 30	1,732,600,006	6	0.0000003
100 %		+ 40	1,732,600,011	11	0.0000006
100 %		+ 50	1,732,600,003	3	0.0000002
BATT. ENDPOINT	3.40	+ 20	1,732,600,003	3	0.0000002

Table 7-68. Frequency Stability Data (AWS WCDMA Mode – Ch. 1413)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 106 of 112

Frequency Stability / Temperature Variation

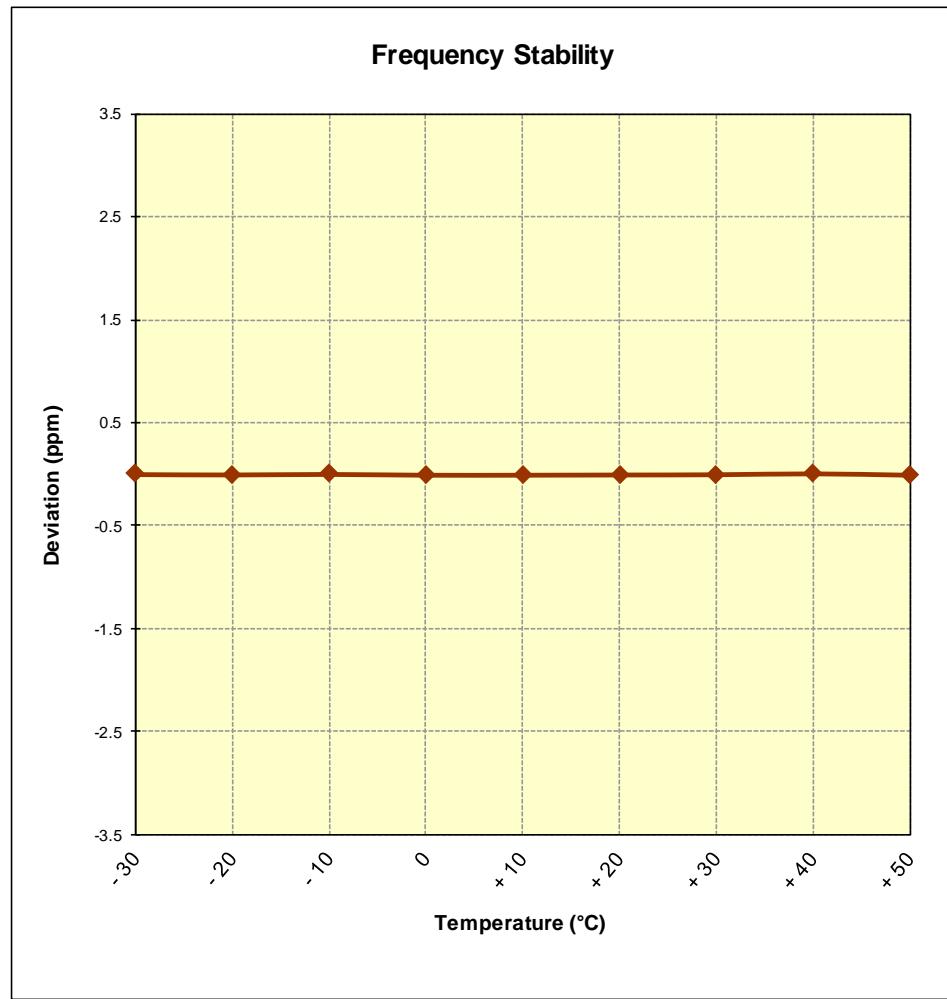


Figure 7-9. Frequency Stability Graph (AWS WCDMA Mode – Ch. 1413)

FCC ID: BCGA1934	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 107 of 112

Frequency Stability / Temperature Variation

OPERATING FREQUENCY:	1,880,000,000	Hz
CHANNEL:	661	
REFERENCE VOLTAGE:	3.80	VDC
DEVIATION LIMIT:	± 0.00025 % or 2.5 ppm	

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	1,880,000,002	2	0.0000001
100 %		- 20	1,880,000,004	4	0.0000002
100 %		- 10	1,880,000,005	5	0.0000003
100 %		0	1,880,000,005	5	0.0000003
100 %		+ 10	1,880,000,003	3	0.0000002
100 %		+ 20	1,880,000,006	6	0.0000003
100 %		+ 30	1,880,000,009	9	0.0000005
100 %		+ 40	1,880,000,005	5	0.0000003
100 %		+ 50	1,880,000,002	2	0.0000001
BATT. ENDPOINT	3.40	+ 20	1,880,000,006	6	0.0000003

Table 7-69. Frequency Stability Data (PCS GPRS Mode – Ch. 661)

FCC ID: BCGA1934	 PCTEST® <small>ENGINEERING LABORATORY, INC.</small>	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device		Page 108 of 112

Frequency Stability / Temperature Variation

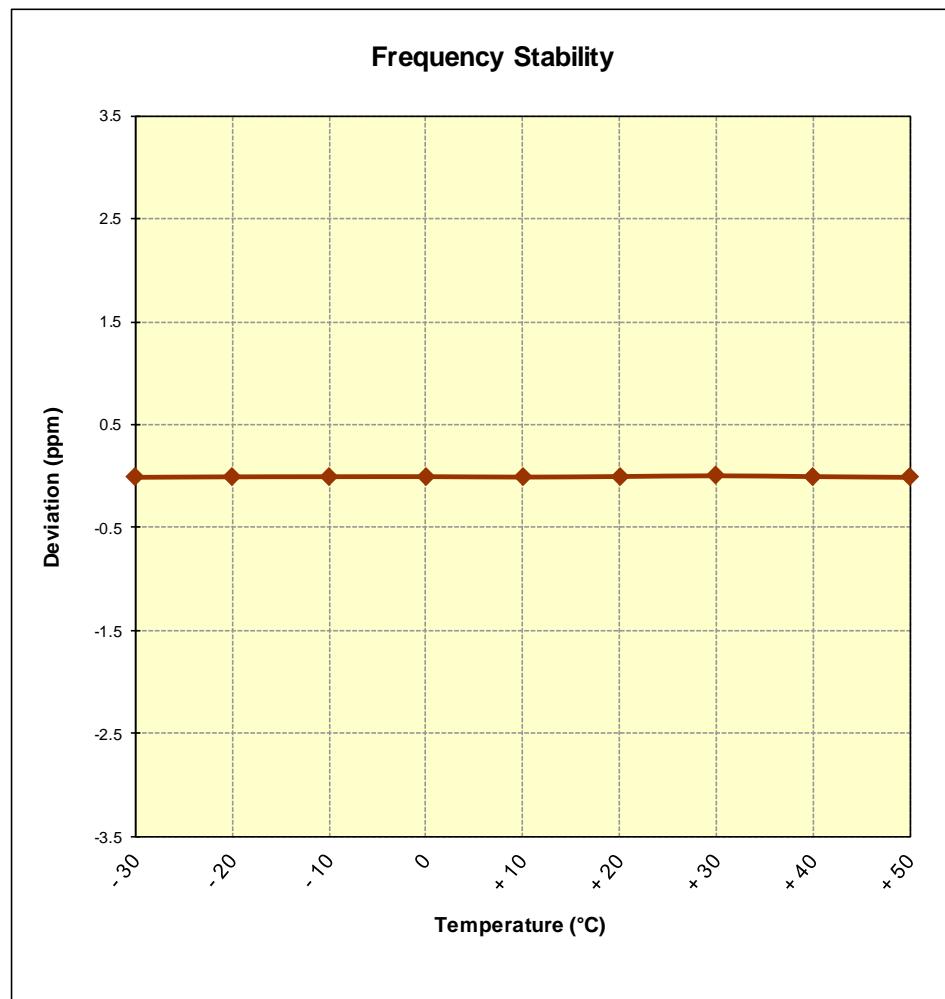


Figure 7-10. Frequency Stability Graph (PCS GPRS Mode – Ch. 661)

FCC ID: BCGA1934	 PCTEST® <small>ENGINEERING LABORATORY, INC.</small>		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 109 of 112	

Frequency Stability / Temperature Variation

OPERATING FREQUENCY:	1,880,000,000	Hz
CHANNEL:	9400	
REFERENCE VOLTAGE:	3.80	VDC
DEVIATION LIMIT:	± 0.00025 % or 2.5 ppm	

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	1,880,000,004	4	0.0000002
100 %		- 20	1,880,000,005	5	0.0000003
100 %		- 10	1,880,000,007	7	0.0000004
100 %		0	1,880,000,007	7	0.0000004
100 %		+ 10	1,880,000,007	7	0.0000004
100 %		+ 20	1,880,000,004	4	0.0000002
100 %		+ 30	1,880,000,004	4	0.0000002
100 %		+ 40	1,880,000,003	3	0.0000002
100 %		+ 50	1,880,000,002	2	0.0000001
BATT. ENDPOINT	3.40	+ 20	1,880,000,008	8	0.0000004

Table 7-70. Frequency Stability Data (PCS WCDMA Mode – Ch. 9400)

FCC ID: BCGA1934	 PCTEST® <small>ENGINEERING LABORATORY, INC.</small>	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device		Page 110 of 112

Frequency Stability / Temperature Variation

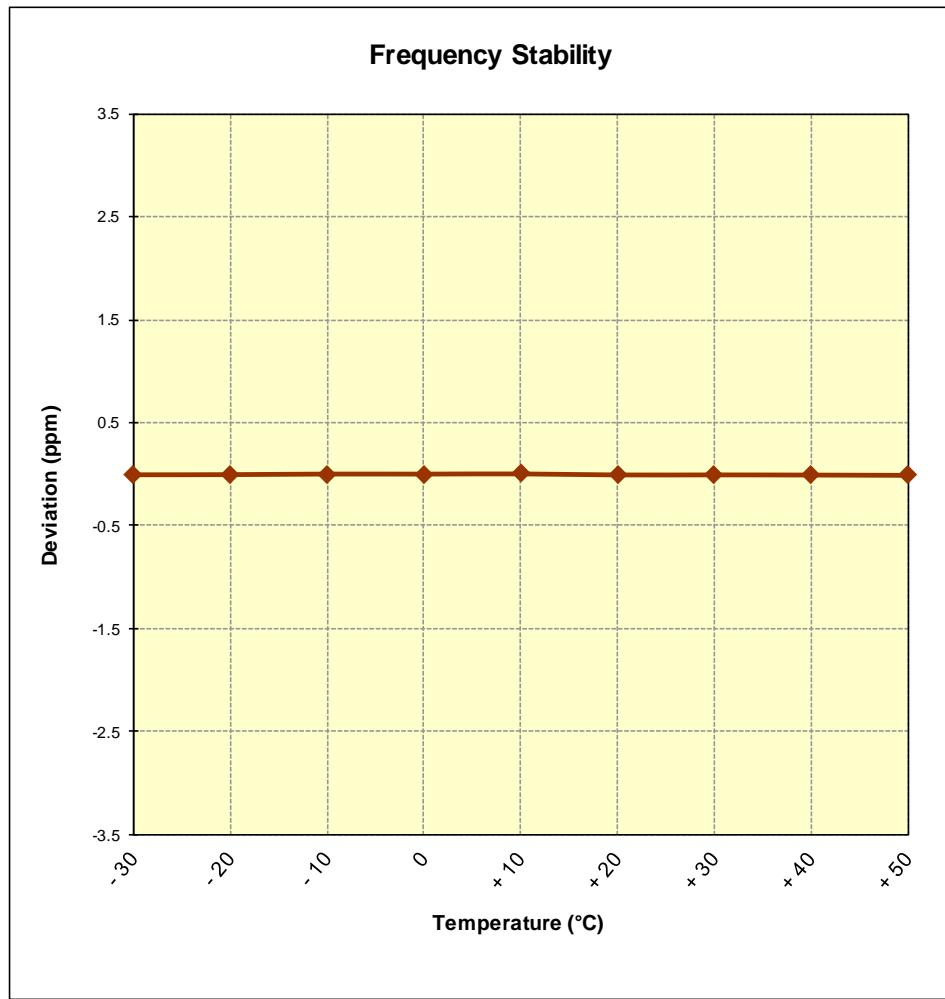


Figure 7-11. Frequency Stability Graph (PCS WCDMA Mode – Ch. 9400)

FCC ID: BCGA1934	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 111 of 112	

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Apple Tablet Device** **FCC ID: BCGA1934** complies with all the requirements of Part 22, 24, & 27 of the FCC Rules and RSS-132, RSS-133, RSS-139 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA1934	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806220015-02.BCG	Test Dates: 07/27/2018-09/25/2018	EUT Type: Tablet Device	Page 112 of 112