



SAR EVALUATION REPORT

Applicant Name:
Apple, Inc.
One Apple Park Way
Cupertino, CA 95014

Date of Testing:
08/13/18 – 09/13/18
Test Site/Location:
PCTEST Lab, Morgan Hill, CA, USA
Document Serial No.:
1C1806220015-01-R2.BCG

FCC ID: BCGA1934
APPLICANT: APPLE, INC.


DUT Type: Tablet Device
Application Type: Certification
FCC Rule Part(s): CFR §2.1093
Model: A1934, A1979

Equipment Class	Band & Mode	Tx Frequency	SAR 1g Body (W/kg)
PCB	GPRS/EDGE 850	824.20 - 848.80 MHz	1.04
PCB	GPRS/EDGE 1900	1850.20 - 1909.80 MHz	1.07
PCB	UMTS 850	826.40 - 846.60 MHz	1.18
PCB	UMTS 1755	1712.4 - 1752.6 MHz	1.08
PCB	UMTS 1900	1852.4 - 1907.6 MHz	1.08
PCB	LTE Band 12	699.7 - 715.3 MHz	1.18
PCB	LTE Band 17	706.5 - 713.5 MHz	N/A
PCB	LTE Band 13	779.5 - 784.5 MHz	0.98
PCB	LTE Band 14	790.5 - 795.5 MHz	1.00
PCB	LTE Band 5 (Cell)	824.7 - 848.3 MHz	1.17
PCB	LTE Band 26 (Cell)	814.7 - 848.3 MHz	1.16
PCB	LTE Band 66 (AWS)	1710.7 - 1779.3 MHz	1.15
PCB	LTE Band 4 (AWS)	1710.7 - 1754.3 MHz	N/A
PCB	LTE Band 25 (PCS)	1850.7 - 1914.3 MHz	1.02
PCB	LTE Band 2 (PCS)	1850.7 - 1909.3 MHz	N/A
PCB	LTE Band 30	2307.5 - 2312.5 MHz	1.10
PCB	LTE Band 7	2502.5 - 2567.5 MHz	1.14
PCB	LTE Band 41	2498.5 - 2587.5 MHz	1.18
DTS	2.4 GHz WLAN	2412 - 2472 MHz	1.14
NI	U-NII-1	5180 - 5240 MHz	N/A
NI	U-NII-2A	5260 - 5320 MHz	1.13
NI	U-NII-2C	5600 - 5720 MHz	1.03
NI	U-NII-3	5745 - 5825 MHz	0.97
DSS/DTS	Bluetooth	2402 - 2480 MHz	1.07
Simultaneous SAR per KDB 690783 D01V01R03:			1.57

Note: This revised Test Report (S/N: 1C1806220015-01-R2.BCG) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.7 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.


Randy Ortanez
President



The SAR Tick is an initiative of the Mobile & Wireless Forum (MWF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MWF. Further details can be obtained by emailing: sartick@mwfai.info.

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 1 of 234

T A B L E O F C O N T E N T S

1	DEVICE UNDER TEST	3
2	LTE INFORMATION	22
3	INTRODUCTION	23
4	DOSIMETRIC ASSESSMENT	24
5	TEST CONFIGURATION POSITIONS.....	25
6	RF EXPOSURE LIMITS	26
7	FCC MEASUREMENT PROCEDURES.....	27
8	RF CONDUCTED POWERS.....	32
9	SYSTEM VERIFICATION.....	131
10	SAR DATA SUMMARY	133
11	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	158
12	SAR MEASUREMENT VARIABILITY	225
13	ADDITIONAL TESTING PER FCC GUIDANCE	226
14	EQUIPMENT LIST.....	230
15	MEASUREMENT UNCERTAINTIES.....	231
16	CONCLUSION.....	232
17	REFERENCES	233
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES		
APPENDIX D: SAR TISSUE SPECIFICATIONS		
APPENDIX E: SAR SYSTEM VALIDATION		
APPENDIX F: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS		
APPENDIX G: POWER REDUCTION VERIFICATION		
APPENDIX H: DLCA POWER MEASUREMENTS		

FCC ID: BCGA1934	 SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device
		Page 2 of 234

1 DEVICE UNDER TEST

1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
GPRS/EDGE 850	Data	824.20 - 848.80 MHz
GPRS/EDGE 1900	Data	1850.20 - 1909.80 MHz
UMTS 850	Data	826.40 - 846.60 MHz
UMTS 1750	Data	1712.4 - 1752.6 MHz
UMTS 1900	Data	1852.4 - 1907.6 MHz
LTE Band 12	Data	699.7 - 715.3 MHz
LTE Band 17	Data	706.5 - 713.5 MHz
LTE Band 13	Data	779.5 - 784.5 MHz
LTE Band 14	Data	790.5 - 795.5 MHz
LTE Band 5 (Cell)	Data	824.7 - 848.3 MHz
LTE Band 26 (Cell)	Data	814.7 - 848.3 MHz
LTE Band 66 (AWS)	Data	1710.7 - 1779.3 MHz
LTE Band 4 (AWS)	Data	1710.7 - 1754.3 MHz
LTE Band 25 (PCS)	Data	1850.7 - 1914.3 MHz
LTE Band 2 (PCS)	Data	1850.7 - 1909.3 MHz
LTE Band 30	Data	2307.5 - 2312.5 MHz
LTE Band 7	Data	2502.5 - 2567.5 MHz
LTE Band 41	Data	2498.5 - 2687.5 MHz
2.4 GHz WLAN	Voice/Data	2412 - 2472 MHz
U-NII-1	Voice/Data	5180 - 5240 MHz
U-NII-2A	Voice/Data	5260 - 5320 MHz
U-NII-2C	Voice/Data	5500 - 5720 MHz
U-NII-3	Voice/Data	5745 - 5825 MHz
Bluetooth	Data	2402 - 2480 MHz

1.2 Power Reduction for SAR

This device uses the manufacturer's proprietary motion detect mode to determine proximity to the user's body and set the licensed power level accordingly for SAR compliance. When being used in the hand or the body, the output power for licensed transmitters will always be reduced. Per FCC KDB Guidance, SAR testing was performed only using reduced output powers following the test positions in KDB Publication 616217.

This device additionally utilizes a power reduction mechanism for Bluetooth and WLAN operations. When WLAN/Bluetooth is operating simultaneously with certain combinations of 2G/3G/4G and 5 GHz WLAN antennas, the output power of is permanently reduced. SAR evaluations were additionally performed at the maximum allowed output power for these scenarios to evaluate simultaneous transmission compliance.

Detailed descriptions of the power reduction mechanisms are included in the operational description. The power reduction mechanisms were confirmed during the SAR Evaluation. Appendix G contains a summary of the verification results.

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 3 of 234

1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

1.3.1 2G/3G/4G Output Power for Portable Use Conditions

A. Antenna 1

Mode / Band		Burst Average GMSK (dBm)		Burst Average 8-PSK (dBm)	
		1 TX Slots	2 TX Slots	1 TX Slots	2 TX Slots
GPRS/EDGE 850	Maximum	27.50	26.50	22.00	21.00
	Nominal	26.75	25.75	21.25	20.25

Mode / Band		Modulated Average (dBm)			
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA	3GPP DC-HSDPA
UMTS Band 5 (850 MHz)	Maximum	20.00	20.00	20.00	20.00
	Nominal	19.50	19.50	19.50	19.50

Mode / Band		Modulated Average (dBm)
LTE Band 12	Maximum	19.70
	Nominal	19.20
LTE Band 17	Maximum	19.70
	Nominal	19.20
LTE Band 13	Maximum	21.30
	Nominal	20.80
LTE Band 14	Maximum	21.30
	Nominal	20.80
LTE Band 5 (Cell)	Maximum	20.30
	Nominal	19.80
LTE Band 26 (Cell)	Maximum	20.30
	Nominal	19.80

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 4 of 234

B. Antenna 3

Mode / Band		Burst Average GMSK (dBm)		Burst Average 8-PSK (dBm)	
		1 TX Slots	2 TX Slots	1 TX Slots	2 TX Slots
GPRS/EDGE 850	Maximum	30.25	27.70	24.75	23.75
	Nominal	29.50	26.95	24.00	23.00
Mode / Band		Modulated Average (dBm)			
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA	3GPP DC-HSDPA
UMTS Band 5 (850 MHz)	Maximum	21.20	21.20	21.20	21.20
	Nominal	20.70	20.70	20.70	20.70
Mode / Band		Modulated Average (dBm)			
LTE Band 12	Maximum	20.00			
	Nominal	19.50			
LTE Band 17	Maximum	20.00			
	Nominal	19.50			
LTE Band 13	Maximum	21.30			
	Nominal	20.80			
LTE Band 14	Maximum	21.30			
	Nominal	20.80			
LTE Band 5 (Cell)	Maximum	21.40			
	Nominal	20.90			
LTE Band 26 (Cell)	Maximum	21.40			
	Nominal	20.90			

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 5 of 234

C. Antenna 4A

Mode / Band		Burst Average GMSK (dBm)		Burst Average 8- PSK (dBm)	
		1 TX Slots	2 TX Slots	1 TX Slots	2 TX Slots
GPRS/EDGE 1900	Maximum	24.30	21.30	24.25	21.30
	Nominal	23.55	20.55	23.50	20.55
Mode / Band		Modulated Average (dBm)			
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA	3GPP DC-HSDPA
UMTS Band 4 (1750 MHz)	Maximum	15.00	15.00	15.00	15.00
	Nominal	14.50	14.50	14.50	14.50
UMTS Band 2 (1900 MHz)	Maximum	15.30	15.30	15.30	15.30
	Nominal	14.80	14.80	14.80	14.80

Mode / Band		Modulated Average (dBm)
LTE Band 66 (AWS)	Maximum	15.00
	Nominal	14.50
LTE Band 4 (AWS)	Maximum	15.00
	Nominal	14.50
LTE Band 25 (PCS)	Maximum	15.30
	Nominal	14.80
LTE Band 2 (PCS)	Maximum	15.30
	Nominal	14.80
LTE Band 30	Maximum	13.50
	Nominal	13.00
LTE Band 7	Maximum	12.00
	Nominal	11.50
LTE Band 7 ULCA	Maximum	12.00
	Nominal	11.00
LTE Band 41 PC3	Maximum	14.50
	Nominal	14.00
LTE Band 41 PC3 ULCA	Maximum	14.50
	Nominal	13.50
LTE Band 41 PC2	Maximum	14.50
	Nominal	14.00

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 6 of 234

D. Antenna 4B

Mode / Band		Burst Average GMSK (dBm)		Burst Average 8-PSK (dBm)	
		1 TX Slots	2 TX Slots	1 TX Slots	2 TX Slots
GPRS/EDGE 1900	Maximum	23.50	20.50	23.50	20.50
	Nominal	22.75	19.75	22.75	19.75
Mode / Band		Modulated Average (dBm)			
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA	3GPP DC-HSDPA
UMTS Band 4 (1750 MHz)	Maximum	14.75	14.75	14.75	14.75
	Nominal	14.25	14.25	14.25	14.25
UMTS Band 2 (1900 MHz)	Maximum	14.20	14.20	14.20	14.20
	Nominal	13.70	13.70	13.70	13.70
Mode / Band		Modulated Average (dBm)			
LTE Band 66 (AWS)	Maximum	14.75			
	Nominal	14.25			
LTE Band 4 (AWS)	Maximum	14.75			
	Nominal	14.25			
LTE Band 25 (PCS)	Maximum	14.20			
	Nominal	13.70			
LTE Band 2 (PCS)	Maximum	14.20			
	Nominal	13.70			
LTE Band 30	Maximum	13.70			
	Nominal	13.20			
LTE Band 7	Maximum	12.30			
	Nominal	11.80			
LTE Band 7 ULCA	Maximum	12.30			
	Nominal	11.30			
LTE Band 41 PC3	Maximum	15.00			
	Nominal	14.50			
LTE Band 41 PC3 ULCA	Maximum	15.00			
	Nominal	14.00			
LTE Band 41 PC2	Maximum	15.00			
	Nominal	14.50			

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 7 of 234

E. Antenna 2A

Mode / Band		Burst Average GMSK (dBm)		Burst Average 8- PSK (dBm)	
		1 TX Slots	2 TX Slots	1 TX Slots	2 TX Slots
GPRS/EDGE 1900	Maximum	23.30	20.30	21.75	20.30
	Nominal	22.55	19.55	21.00	19.55
Mode / Band		Modulated Average (dBm)			
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA	3GPP DC-HSDPA
UMTS Band 4 (1750 MHz)	Maximum	14.70	14.70	14.70	14.70
	Nominal	14.20	14.20	14.20	14.20
UMTS Band 2 (1900 MHz)	Maximum	14.00	14.00	14.00	14.00
	Nominal	13.50	13.50	13.50	13.50

Mode / Band		Modulated Average (dBm)
LTE Band 66 (AWS)	Maximum	14.70
	Nominal	14.20
LTE Band 4 (AWS)	Maximum	14.70
	Nominal	14.20
LTE Band 25 (PCS)	Maximum	14.00
	Nominal	13.50
LTE Band 2 (PCS)	Maximum	14.00
	Nominal	13.50
LTE Band 30	Maximum	12.60
	Nominal	12.10
LTE Band 7	Maximum	12.00
	Nominal	11.50
LTE Band 7 ULCA	Maximum	12.00
	Nominal	11.00
LTE Band 41 PC3	Maximum	14.80
	Nominal	14.30
LTE Band 41 PC3 ULCA	Maximum	14.80
	Nominal	13.80
LTE Band 41 PC2	Maximum	14.80
	Nominal	14.30

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 8 of 234

F. Antenna 2B

Mode / Band		Burst Average GMSK (dBm)		Burst Average 8- PSK (dBm)	
		1 TX Slots	2 TX Slots	1 TX Slots	2 TX Slots
GPRS/EDGE 1900	Maximum	23.00	20.00	21.75	20.00
	Nominal	22.25	19.25	21.00	19.25
Mode / Band		Modulated Average (dBm)			
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA	3GPP DC-HSDPA
UMTS Band 4 (1750 MHz)	Maximum	14.30	14.30	14.30	14.30
	Nominal	13.80	13.80	13.80	13.80
UMTS Band 2 (1900 MHz)	Maximum	13.70	13.70	13.70	13.70
	Nominal	13.20	13.20	13.20	13.20
Mode / Band		Modulated Average (dBm)			
LTE Band 66 (AWS)	Maximum	14.30			
	Nominal	13.80			
LTE Band 4 (AWS)	Maximum	14.30			
	Nominal	13.80			
LTE Band 25 (PCS)	Maximum	13.70			
	Nominal	13.20			
LTE Band 2 (PCS)	Maximum	13.70			
	Nominal	13.20			
LTE Band 30	Maximum	13.40			
	Nominal	12.90			
LTE Band 7	Maximum	12.30			
	Nominal	11.80			
LTE Band 7 ULCA	Maximum	12.30			
	Nominal	11.30			
LTE Band 41 PC3	Maximum	14.50			
	Nominal	14.00			
LTE Band 41 PC3 ULCA	Maximum	14.50			
	Nominal	13.50			
LTE Band 41 PC2	Maximum	14.50			
	Nominal	14.00			

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 9 of 234

1.3.2 Unlicensed Maximum Output Power

A. Antenna 4A

Mode / Band		Modulated Average (dBm)				
Bluetooth BDR/LE	Maximum	16.00				
Bluetooth EDR	Maximum	13.50				
Bluetooth HDR	Maximum	8.50				
Mode / Band		Modulated Average (dBm)				
		Ch. 1-11	Ch. 12	Ch. 13		
IEEE 802.11b (2.4 GHz)	Maximum	13.75				
	Nominal	12.25				
IEEE 802.11g (2.4 GHz)	Maximum	13.75	11.00	4.00		
	Nominal	12.25	9.50	2.50		
IEEE 802.11n (2.4 GHz)	Maximum	13.75	11.00	4.00		
	Nominal	12.25	9.50	2.50		
Mode / Band		Modulated Average - MIMO (dBm)				
		Ch. 1	Ch. 2-10	Ch. 11	Ch. 12	Ch. 13
IEEE 802.11g/n (2.4 GHz)	Maximum	13.50	13.75	13.50	11.00	2.00
	Nominal	12.00	12.25	12.00	9.50	0.50

Note: In MIMO operations, Antenna 4A transmits at maximum allowed powers as indicated above.

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 10 of 234

B. Antenna 2A

Mode / Band		Modulated Average (dBm)
Bluetooth BDR/LE	Maximum	15.00
Bluetooth EDR	Maximum	11.00
Bluetooth HDR	Maximum	6.00

Mode / Band		Modulated Average (dBm)				
		Ch. 2-10	Ch. 1,11	Ch. 12	Ch. 13	
IEEE 802.11b (2.4 GHz)	Maximum	13.75			12.00	
	Nominal	12.25			10.50	
IEEE 802.11g (2.4 GHz)	Maximum	13.75	13.50	9.00	2.50	
	Nominal	12.25	12.00	7.50	1.00	
IEEE 802.11n (2.4 GHz)	Maximum	13.75	13.50	9.00	2.50	
	Nominal	12.25	12.00	7.50	1.00	
Mode / Band		Modulated Average - MIMO (dBm)				
		Ch. 1	Ch. 2-10	Ch. 11	Ch. 12	Ch. 13
IEEE 802.11g/n (2.4 GHz)	Maximum	12.50	13.75	12.00	9.00	0.00
	Nominal	11.00	12.25	10.50	7.50	-1.50

Note: In MIMO operations, Antenna 2A transmits at maximum allowed powers as indicated above.

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 11 of 234

C. Antenna 5

Mode / Band		Modulated Average (dBm)				
Bluetooth BDR/LE	Maximum	18.50				
Bluetooth EDR	Maximum	11.50				
Bluetooth HDR	Maximum	6.50				
Mode / Band		Modulated Average (dBm)				
		Ch. 1	Ch. 2-11	Ch. 12	Ch. 13	
IEEE 802.11b (2.4 GHz)	Maximum	19.00				
	Nominal	17.50				
IEEE 802.11g (2.4 GHz)	Maximum	17.50	19.00	18.25	17.50	
	Nominal	16.00	17.50	16.75	16.00	
IEEE 802.11n (2.4 GHz)	Maximum	17.50	19.00	18.25	17.50	
	Nominal	16.00	17.50	16.75	16.00	
Mode / Band		Modulated Average - MIMO (dBm)				
		Ch. 1	Ch. 2-10	Ch. 11	Ch. 12	Ch. 13
IEEE 802.11g/n (2.4 GHz)	Maximum	17.00	19.00	17.00	9.50	1.50
	Nominal	15.50	17.50	15.50	8.00	0.00

Note: In MIMO operations, Antenna 5 transmits at maximum allowed powers as indicated above.

Mode / Band		Modulated Average (dBm)																	
		20 MHz Bandwidth				40 MHz Bandwidth				80 MHz Bandwidth									
		Ch. 64, 149-165	Ch. 36-48, 100-136, 144	Ch. 52-60	Ch. 140	Ch. 38, 62-102	Ch. 46, 110-142	Ch. 54	Ch. 151-159	Ch. 42-106		Ch. 122-138	Ch. 155						
IEEE 802.11a (5 GHz)	Maximum	16.50	15.50	17.00	15.00														
	Nominal	15.00	14.00	15.50	13.50														
IEEE 802.11n (5 GHz)	Maximum	16.50	15.50	17.00	15.00	14.00	15.50	17.00	16.50										
	Nominal	15.00	14.00	15.50	13.50	12.50	14.00	15.50	15.00										
IEEE 802.11ac (5 GHz)	Maximum	16.50	15.50	17.00	15.00	14.00	15.50	17.00	16.50	13.50		15.50	16.50						
	Nominal	15.00	14.00	15.50	13.50	12.50	14.00	15.50	15.00	12.00		14.00	15.00						
Mode / Band		Modulated Average - MIMO (CDD/SDM) (dBm)																	
		20 MHz Bandwidth					40 MHz Bandwidth					80 MHz Bandwidth							
		Ch. 36, 64, 100, 136	Ch. 40-48, 104-132, 144	Ch. 52-60	Ch. 140	Ch. 149-165	Ch. 38, 62	Ch. 46, 110-126, 142	Ch. 54	Ch. 102	Ch. 134	Ch. 151-159	Ch. 42	Ch. 58	Ch. 106	Ch. 122-138	Ch. 155		
IEEE 802.11a (5 GHz)	Maximum	15.00	15.50	17.00	12.50	16.50													
	Nominal	13.50	14.00	15.50	11.00	15.00													
IEEE 802.11n (5 GHz)	Maximum	15.00	15.50	17.00	12.50	16.50	13.00	15.50	17.00	12.75	14.00	16.50							
	Nominal	13.50	14.00	15.50	11.00	15.00	11.50	14.00	15.50	11.25	12.50	15.00							
IEEE 802.11ac (5 GHz)	Maximum	15.00	15.50	17.00	12.50	16.50	13.00	15.50	17.00	12.75	14.00	16.50	12.00	11.50	11.25	15.50	16.50		
	Nominal	13.50	14.00	15.50	11.00	15.00	11.50	14.00	15.50	11.25	12.50	15.00	10.50	10.00	9.75	14.00	15.00		

Note: In MIMO operations, Antenna 5 transmits at maximum allowed powers as indicated above for both 2 Tx CDD and 2 Tx SDM.

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 12 of 234

D. Antenna 6

Mode / Band		Modulated Average (dBm)											
		20 MHz Bandwidth				40 MHz Bandwidth				80 MHz Bandwidth			
		Ch. 36, 64	ch. 40-60	Ch. 100-136, 144	Ch. 140, 149-165	Ch. 38, 62, 102	Ch. 46-54	Ch. 110-142	Ch. 151-159	Ch. 42-106	Ch. 122-138	Ch. 155	
IEEE 802.11a (5 GHz)	Maximum	16.50	17.00	15.50	15.00								
	Nominal	15.00	15.50	14.00	13.50								
IEEE 802.11n (5 GHz)	Maximum	16.50	17.00	15.50	15.00	14.00	17.00	15.50	15.00				
	Nominal	15.00	15.50	14.00	13.50	12.50	15.50	14.00	13.50				
IEEE 802.11ac (5 GHz)	Maximum	16.50	17.00	15.50	15.00	14.00	17.00	15.50	15.00	13.50	15.50	15.00	
	Nominal	15.00	15.50	14.00	13.50	12.50	15.50	14.00	13.50	12.00	14.00	13.50	

Mode / Band		Modulated Average - MIMO (CDD/SDM) (dBm)													
		20 MHz Bandwidth				40 MHz Bandwidth				80 MHz Bandwidth					
		Ch. 36, 64, 100, 136, 149-165	Ch. 40-60	Ch. 104-132, 144	Ch. 140	Ch. 38, 62	Ch. 46-54	Ch. 102	Ch. 110-126, 142	Ch. 134	Ch. 151-159	Ch. 42	Ch. 58	Ch. 106	Ch. 122-138
IEEE 802.11a (5 GHz)	Maximum	15.00	17.00	15.50	12.50										
	Nominal	13.50	15.50	14.00	11.00										
IEEE 802.11n (5 GHz)	Maximum	15.00	17.00	15.50	12.50	13.00	17.00	12.75	15.50	14.00	15.00				
	Nominal	13.50	15.50	14.00	11.00	11.50	15.50	11.25	14.00	12.50	13.50				
IEEE 802.11ac (5 GHz)	Maximum	15.00	17.00	15.50	12.50	13.00	17.00	12.75	15.50	14.00	15.00	12.00	11.50	11.25	15.50
	Nominal	13.50	15.50	14.00	11.00	11.50	15.50	11.25	14.00	12.50	13.50	10.50	10.00	9.75	14.00

Note: In MIMO operations, Antenna 6 transmits at maximum allowed powers as indicated above for both 2 Tx CDD and 2 Tx SDM.

1.3.3 Unlicensed Reduced Output Power

A. Antenna 4A – Output Power for Simultaneous Operations with 2G/3G/4G Antennas 3/4A/4B

Mode / Band		Modulated Average (dBm)
Bluetooth BDR/LE	Maximum	9.00
Bluetooth EDR	Maximum	9.00
Bluetooth HDR	Maximum	8.50

Note: The above power levels are implemented when 2G/3G/4G Operations are active with Antenna 3/4A/4B.

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 13 of 234

Mode / Band		Modulated Average (dBm)		
		Ch. 1-11	Ch. 12	Ch. 13
IEEE 802.11b (2.4 GHz)	Maximum	6.75		
	Nominal	5.25		
IEEE 802.11g (2.4 GHz)	Maximum	6.75		4.00
	Nominal	5.25		2.50
IEEE 802.11n (2.4 GHz)	Maximum	6.75		4.00
	Nominal	5.25		2.50

Mode / Band		Modulated Average - MIMO (dBm)		
		Ch. 1-12		Ch. 13
IEEE 802.11g/n (2.4 GHz)	Maximum	6.75		2.00
	Nominal	5.25		0.50

Note: The above power levels are implemented when 2G/3G/4G Operations are active with Antenna 4A/4B. In MIMO operations, Antenna 4A transmits at maximum allowed powers as indicated above.

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 14 of 234

B. Antenna 2A – Output Power for Simultaneous Operations with 2G/3G/4G Antennas 1/2A/2B

Mode / Band		Modulated Average (dBm)
Bluetooth BDR/LE Reduced Level 1	Maximum	12.50
Bluetooth EDR Reduced Level 1	Maximum	11.00
Bluetooth HDR Reduced Level 1	Maximum	6.00

Note: The above power levels are implemented when 5 GHz WIFI is active only.

Mode / Band		Modulated Average (dBm)
Bluetooth BDR/LE Reduced Level 2	Maximum	8.00
Bluetooth EDR Reduced Level 2	Maximum	8.00
Bluetooth HDR Reduced Level 2	Maximum	6.00

Note: The above power levels are implemented when 2G/3G/4G Operations are active with Antenna 1/2A/2B with/without 5 GHz WIFI.

Mode / Band		Modulated Average (dBm)	
		Ch. 1-12	Ch. 13
IEEE 802.11b (2.4 GHz)	Maximum	6.75	
	Nominal	5.25	
IEEE 802.11g (2.4 GHz)	Maximum	6.75	2.50
	Nominal	5.25	1.00
IEEE 802.11n (2.4 GHz)	Maximum	6.75	2.50
	Nominal	5.25	1.00
Mode / Band		Modulated Average - MIMO (dBm)	
		Ch. 1-12	Ch. 13
IEEE 802.11g/n (2.4 GHz)	Maximum	6.75	0.00
	Nominal	5.25	-1.50

Note: The above power levels are implemented when 2G/3G/4G Operations are active with Antenna 2A/2B. In MIMO operations, Antenna 2A transmits at maximum allowed powers as indicated above.

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 15 of 234

C. Antenna 5 – Output Power for Simultaneous Operations with 2G/3G/4G Antennas 1/3/4A/4B/2A/2B

Mode / Band		Modulated Average (dBm)
Bluetooth BDR/LE Reduced Level 1	Maximum	17.00
Bluetooth EDR Reduced Level 1	Maximum	11.50
Bluetooth HDR Reduced Level 1	Maximum	6.50

Note: The above power levels are implemented when 2G/3G/4G Operations are active with Antenna 1/2A/2B.

Mode / Band		Modulated Average (dBm)
Bluetooth BDR/LE Reduced Level 2	Maximum	14.50
Bluetooth EDR Reduced Level 2	Maximum	11.50
Bluetooth HDR Reduced Level 2	Maximum	6.50

Note: The above power levels are implemented when 5 GHz WIFI is active only.

Mode / Band		Modulated Average (dBm)
Bluetooth BDR/LE Reduced Level 3	Maximum	12.50
Bluetooth EDR Reduced Level 3	Maximum	11.50
Bluetooth HDR Reduced Level 3	Maximum	6.50

Note: The above power levels are implemented when 2G/3G/4G Operations are active with Antenna 1/2A/2B with 5 GHz WIFI.

Mode / Band		Modulated Average (dBm)		
IEEE 802.11b (2.4 GHz)	Maximum	15.50		
	Nominal	14.00		
IEEE 802.11g (2.4 GHz)	Maximum	15.50		
	Nominal	14.00		
IEEE 802.11n (2.4 GHz)	Maximum	15.50		
	Nominal	14.00		
Mode / Band		Modulated Average - MIMO (dBm)		
		Ch. 1-11	Ch. 12	Ch. 13
IEEE 802.11g/n (2.4 GHz)	Maximum	15.50	9.50	1.50
	Nominal	14.00	8.00	0.00

Note: In MIMO operations, Antenna 5 transmits at maximum allowed powers as indicated above.

Mode / Band		Modulated Average (dBm)								
		20 MHz Bandwidth			40 MHz Bandwidth			80 MHz Bandwidth		
		Ch. 36-48, 100-144	Ch. 52-64	Ch. 149-165	Ch. 38-46, 102-142	Ch. 54-62	Ch. 151-159	Ch. 42, 106-138	Ch. 58	Ch. 155
IEEE 802.11a (5 GHz)	Maximum	8.50	10.00	9.00						
	Nominal	7.00	8.50	7.50						
IEEE 802.11n (5 GHz)	Maximum	8.50	10.00	9.00	8.50	10.00	9.00			
	Nominal	7.00	8.50	7.50	7.00	8.50	7.50			
IEEE 802.11ac (5 GHz)	Maximum	8.50	10.00	9.00	8.50	10.00	9.00	8.50	10.00	9.00
	Nominal	7.00	8.50	7.50	7.00	8.50	7.50	7.00	8.50	7.50

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 16 of 234

Mode / Band		Modulated Average - MIMO (CDD/SDM) (dBm)								
		20 MHz Bandwidth			40 MHz Bandwidth			80 MHz Bandwidth		
		Ch. 36-48, 100-144	Ch. 52-64	Ch. 149-165	Ch. 38-46, 102-142	Ch. 54-62	Ch. 151-159	Ch. 42, 106-138	Ch. 58	Ch. 155
IEEE 802.11a (5 GHz)	Maximum	8.50	10.00	9.00						
	Nominal	7.00	8.50	7.50						
IEEE 802.11n (5 GHz)	Maximum	8.50	10.00	9.00	8.50	10.00	9.00			
	Nominal	7.00	8.50	7.50	7.00	8.50	7.50			
IEEE 802.11ac (5 GHz)	Maximum	8.50	10.00	9.00	8.50	10.00	9.00	8.50	10.00	9.00
	Nominal	7.00	8.50	7.50	7.00	8.50	7.50	7.00	8.50	7.50

Note: The above power levels are implemented when 2G/3G/4G Operations are active with Antenna 2A. In MIMO operations, Antenna 5 transmits at maximum allowed powers as indicated above for both 2 Tx CDD and 2 Tx SDM.

D. Antenna 6- Output Power for Simultaneous Operations with 2G/3G/4G Antenna 3

Mode / Band		Modulated Average (dBm)								
		20 MHz Bandwidth			40 MHz Bandwidth			80 MHz Bandwidth		
		Ch. 36 - 64	Ch. 100-144	Ch. 149-165	Ch. 38-62	Ch. 102-142	Ch. 151-159	Ch. 42-58	Ch. 106-138	Ch. 155
IEEE 802.11a (5 GHz)	Maximum	12.00	10.50	10.00						
	Nominal	10.50	9.00	8.50						
IEEE 802.11n (5 GHz)	Maximum	12.00	10.50	10.00	12.00	10.50	10.00			
	Nominal	10.50	9.00	8.50	10.50	9.00	8.50			
IEEE 802.11ac (5 GHz)	Maximum	12.00	10.50	10.00	12.00	10.50	10.00	12.00	10.50	10.00
	Nominal	10.50	9.00	8.50	10.50	9.00	8.50	10.50	9.00	8.50

Mode / Band		Modulated Average - MIMO (CDD/SDM) (dBm)									
		20 MHz Bandwidth			40 MHz Bandwidth			80 MHz Bandwidth			
		Ch. 36-64	Ch. 104-144	Ch. 100, 149-165	Ch. 38-62	Ch. 102-142	Ch. 151-159	Ch. 42	Ch. 58	Ch. 106-138	Ch. 155
IEEE 802.11a (5 GHz)	Maximum	12.00	10.50	10.00							
	Nominal	10.50	9.00	8.50							
IEEE 802.11n (5 GHz)	Maximum	12.00	10.50	10.00	12.00	10.50	10.00				
	Nominal	10.50	9.00	8.50	10.50	9.00	8.50				
IEEE 802.11ac (5 GHz)	Maximum	12.00	10.50	10.00	12.00	10.50	10.00	12.00	11.50	10.50	10.00
	Nominal	10.50	9.00	8.50	10.50	9.00	8.50	10.50	10.00	9.00	8.50

Note: In MIMO operations, Antenna 6 transmits at maximum allowed powers as indicated above for both 2 Tx CDD and 2 Tx SDM.

FCC ID: BCGA1934	 SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 17 of 234

1.4 DUT Antenna Locations

The overall diagonal dimension of the device is > 200 mm. A diagram showing the location of the device antennas can be found in Appendix F. Exact antenna dimensions and separation distances are shown in the Technical Descriptions in the FCC filings.

Table 1-1
Device Edges/Sides for SAR Testing

Mode	Back	Front	Top	Bottom	Right	Left
GPRS 850 Ant 1	Yes	No	No	Yes	No	Yes
GPRS 850 Ant 3	Yes	No	Yes	No	Yes	No
GPRS 1900 Ant 4A	Yes	No	Yes	No	No	Yes
GPRS 1900 Ant 4B	Yes	No	Yes	No	No	Yes
GPRS 1900 Ant 2A	Yes	No	No	Yes	Yes	No
GPRS 1900 Ant 2B	Yes	No	No	Yes	Yes	No
UMTS 850 Ant 1	Yes	No	No	Yes	No	Yes
UMTS 850 Ant 3	Yes	No	Yes	No	Yes	No
UMTS 1750 Ant 4A	Yes	No	Yes	No	No	Yes
UMTS 1750 Ant 4B	Yes	No	Yes	No	No	Yes
UMTS 1750 Ant 2A	Yes	No	No	Yes	Yes	No
UMTS 1750 Ant 2B	Yes	No	No	Yes	Yes	No
UMTS 1900 Ant 4A	Yes	No	Yes	No	No	Yes
UMTS 1900 Ant 4B	Yes	No	Yes	No	No	Yes
UMTS 1900 Ant 2A	Yes	No	No	Yes	Yes	No
UMTS 1900 Ant 2B	Yes	No	No	Yes	Yes	No
LTE Band 12 Ant 1	Yes	No	No	Yes	No	Yes
LTE Band 12 Ant 3	Yes	No	Yes	No	Yes	No
LTE Band 13 Ant 1	Yes	No	No	Yes	No	Yes
LTE Band 13 Ant 3	Yes	No	Yes	No	Yes	No
LTE Band 14 Ant 1	Yes	No	No	Yes	No	Yes
LTE Band 14 Ant 3	Yes	No	Yes	No	Yes	No
LTE Band 5 Ant 1	Yes	No	No	Yes	No	Yes
LTE Band 5 Ant 3	Yes	No	Yes	No	Yes	No
LTE Band 26 Ant 1	Yes	No	No	Yes	No	Yes
LTE Band 26 Ant 3	Yes	No	Yes	No	Yes	No
LTE Band 66 Ant 4A	Yes	No	Yes	No	No	Yes
LTE Band 66 Ant 4B	Yes	No	Yes	No	No	Yes
LTE Band 66 Ant 2A	Yes	No	No	Yes	Yes	No
LTE Band 66 Ant 2B	Yes	No	No	Yes	Yes	No
LTE Band 25 Ant 4A	Yes	No	Yes	No	No	Yes
LTE Band 25 Ant 4B	Yes	No	Yes	No	No	Yes
LTE Band 25 Ant 2A	Yes	No	No	Yes	Yes	No
LTE Band 25 Ant 2B	Yes	No	No	Yes	Yes	No
LTE Band 30 Ant 4A	Yes	No	Yes	No	No	Yes
LTE Band 30 Ant 4B	Yes	No	Yes	No	No	Yes
LTE Band 30 Ant 2A	Yes	No	No	Yes	Yes	No
LTE Band 30 Ant 2B	Yes	No	No	Yes	Yes	No
LTE Band 7 Ant 4A	Yes	No	Yes	No	No	Yes
LTE Band 7 Ant 4B	Yes	No	Yes	No	No	Yes
LTE Band 7 Ant 2A	Yes	No	No	Yes	Yes	No
LTE Band 7 Ant 2B	Yes	No	No	Yes	Yes	No
LTE Band 41 Ant 4A	Yes	No	Yes	No	No	Yes
LTE Band 41 Ant 4B	Yes	No	Yes	No	No	Yes
LTE Band 41 Ant 2A	Yes	No	No	Yes	Yes	No
LTE Band 41 Ant 2B	Yes	No	No	Yes	Yes	No
2.4 GHz WLAN Ant 4A	Yes	No	Yes	No	No	Yes
2.4 GHz WLAN Ant 2A	Yes	No	No	Yes	Yes	No
2.4 GHz WLAN Ant 5	Yes	No	No	Yes	Yes	No
5 GHz WLAN Ant 5	Yes	No	No	Yes	Yes	No
5 GHz WLAN Ant 6	Yes	No	Yes	No	Yes	No
Bluetooth Ant 4A	Yes	No	Yes	No	No	Yes
Bluetooth Ant 2A	Yes	No	No	Yes	Yes	No
Bluetooth Ant 5	Yes	No	No	Yes	Yes	No

Note: Per FCC KDB Publication 616217 D04v01r01, particular edges were not required to be evaluated for SAR based on the SAR exclusion threshold in KDB 447498 D01V06. Additional edges may have been evaluated for simultaneous transmission analysis.

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 18 of 234

1.5 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06 4.3.2 procedures

Table 1-2
Simultaneous Transmission Scenarios

No.	Capable Transmit Configuration	Body
1	Cellular Band + 2.4 GHz WI-FI	Yes
2	Cellular Band + 5 GHz WI-FI	Yes
3	Cellular Band + 2.4 GHz Bluetooth	Yes
4	Cellular Band+ 2.4 GHz WI-FI MIMO	Yes
5	Cellular Band + 5 GHz WI-FI MIMO	Yes
6	Cellular Band + 2.4 GHz Bluetooth + 5 GHz WI-FI	Yes
7	Cellular Band + 2.4 GHz Bluetooth + 5 GHz WI-FI MIMO	Yes
8	2.4 GHz Bluetooth + 5 GHz WI-FI	Yes
9	2.4 GHz Bluetooth + 5 GHz WI-FI MIMO	Yes

1. There are no limitations in the above listed simultaneous transmission scenarios between cellular antennas and BT/WI-FI antennas.
2. 2.4 GHz WLAN on Antenna 2A cannot transmit simultaneously with 2.4 GHz WLAN on Antenna 5.
3. 2.4 GHz WLAN and 2.4 GHz Bluetooth share the same antenna path and cannot transmit simultaneously on any antenna (2A, 4A, 5).
4. All licensed modes share the same antenna path and cannot transmit simultaneously.
5. This device supports 2x2 MIMO Tx for WLAN. 802.11a/g/n/ac supports CDD/STBC and 802.11n/ac additionally supports SDM. Each WLAN antenna can transmit independently or together when operating with MIMO.
6. This device supports VoWiFi.

1.6 Miscellaneous SAR Test Considerations

(A) WIFI/BT

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg, SAR is not required for U-NII-1 band according to FCC KDB Publication 248227 D01v02r02.

The WLAN/Bluetooth chipset in this device is produced by two different suppliers. The electrically identical modules are manufactured with the identical mechanical structure to meet the same specifications and functions. Two device variants are referenced as Variant 1 and Variant 2 in this report. WLAN/Bluetooth SAR

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 19 of 234

worst case configuration was spotchecked on Variant 1 and Variant 2. The Variant with the highest reported SAR value was evaluated for the remaining WLAN/Bluetooth configurations.

This device supports channel 1-13 for 2.4 GHz WLAN. However, because channel 12/13 targets are not higher than that of channels 1-11, channels 1, 6 and 11 were considered for SAR testing per FCC KDB 248227 D01V02r02.

This device supports IEEE 802.11ac with the following features:

- a) Up to 80 MHz Bandwidth only
- b) No aggregate channel configurations
- c) 2 Tx antenna output
- d) 256 QAM is supported
- e) TDWR and Band gap channels are supported

(B) Licensed Transmitter(s)

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03r01.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

This device supports LTE Carrier Aggregation (CA) in the downlink. All uplink communications are identical to Release 8 specifications. Per FCC KDB Publication 941225 D05A v01r02, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive. DLCA power measurements can be found in Appendix H.

This device supports LTE Carrier Aggregation (CA) in the uplink for LTE Band 7 and LTE Band 41 with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per 2017 Fall TCB Workshop Notes.

This device supports downlink 4x4 MIMO operations for some LTE Bands. Per May 2017 TCB Workshop Guidance, SAR for downlink 4x4 MIMO was not needed since the maximum average output power in 4x4 downlink MIMO mode was not > 0.25 dB higher than the maximum output power with downlink 4x4 MIMO inactive.

This device supports 64QAM on the uplink and 256QAM on the downlink for LTE Operations. Conducted powers for 64QAM uplink configurations were measured per Section 5.1 of FCC KDB Publication 941225 D05v02r05. SAR was not required for 64QAM since the highest maximum output power for 64 QAM is $\leq \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg, per Section 5.2.4 of FCC KDB Publication 941225 D05v02r05.

This device supports both Power Class 2 (PC2) and Power Class 3 (PC3) for LTE Band 41. Per May 2017 TCB Workshop Notes, SAR tests were performed with Power Class 3 (given the specific UL/DL limitations for Power Class 2). Additionally, SAR testing for the power class condition was evaluated for the highest configuration in Power Class 3 for each test configuration to confirm the results were scalable linearly (See Section 14.2).

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 20 of 234

This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of an LTE Band falls completely within an LTE band with a larger transmission frequency range, both LTE bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both LTE bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range.

1.7 Guidance Applied

- FCC KDB Publication 941225 D01v03r01, D05v02r04, D05Av01r02 (2G/3G/4G)
- FCC KDB Publication 248227 D01v02r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v06 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 616217 D04v01r02 (Tablet)
- October 2013 TCB Workshop Notes (GPRS Testing Considerations)
- May 2017 TCB Workshop Notes (LTE 4x4 Downlink MIMO, LTE Band 41 Power Class 2/3)
- April 2018 TCB Workshop Notes (LTE Carrier Aggregation)

1.8 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 10.

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 21 of 234

LTE Information				
FCC ID	BCGA1934			
Form Factor	Tablet Device			
Frequency Range of each LTE transmission band	LTE Band 12 (699.7 - 715.3 MHz) LTE Band 17 (706.5 - 713.5 MHz) LTE Band 13 (779.5 - 784.5 MHz) LTE Band 14 (790.5 - 795.5 MHz) LTE Band 5 (Cell) (824.7 - 848.3 MHz) LTE Band 26 (Cell) (814.7 - 848.3 MHz) LTE Band 66 (AWS) (1710.7 - 1779.3 MHz) LTE Band 4 (AWS) (1710.7 - 1754.3 MHz) LTE Band 25 (PCS) (1850.7 - 1914.3 MHz) LTE Band 2 (PCS) (1850.7 - 1909.3 MHz) LTE Band 30 (2307.5 - 2312.5 MHz) LTE Band 7 (2502.5 - 2567.5 MHz) LTE Band 41 (2498.5 - 2687.5 MHz)			
Channel Bandwidths	LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 17: 5 MHz, 10 MHz LTE Band 13: 5 MHz, 10 MHz LTE Band 14: 5 MHz, 10 MHz LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 26 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 66 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 25 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 30: 5 MHz, 10 MHz LTE Band 7: 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 41: 5 MHz, 10 MHz, 15 MHz, 20 MHz			
Channel Numbers and Frequencies (MHz)	Low	Low-Mid	Mid	Mid-High
LTE Band 12: 1.4 MHz	699.7 (23017)	707.5 (23095)	715.3 (23173)	
LTE Band 12: 3 MHz	700.5 (23025)	707.5 (23095)	714.5 (23165)	
LTE Band 12: 5 MHz	701.5 (23035)	707.5 (23095)	713.5 (23155)	
LTE Band 12: 10 MHz	704 (23060)	707.5 (23095)	711 (23130)	
LTE Band 17: 5 MHz	706.5 (23755)	710 (23790)	713.5 (23825)	
LTE Band 17: 10 MHz	709 (23780)	710 (23790)	711 (23800)	
LTE Band 13: 5 MHz	779.5 (23205)	782 (23230)	784.5 (23255)	
LTE Band 13: 10 MHz	N/A	782 (23230)	N/A	
LTE Band 14: 5 MHz	790.5 (23305)	793 (23330)	795.5 (23355)	
LTE Band 14: 10 MHz	N/A	793 (23330)	N/A	
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)	836.5 (20525)	848.3 (20643)	
LTE Band 5 (Cell): 3 MHz	825.5 (20415)	836.5 (20525)	847.5 (20635)	
LTE Band 5 (Cell): 5 MHz	826.5 (20425)	836.5 (20525)	846.5 (20625)	
LTE Band 5 (Cell): 10 MHz	829 (20450)	836.5 (20525)	844 (20600)	
LTE Band 26 (Cell): 1.4 MHz	814.7 (26697)	831.5 (26865)	848.3 (27033)	
LTE Band 26 (Cell): 3 MHz	815.5 (26705)	831.5 (26865)	847.5 (27025)	
LTE Band 26 (Cell): 5 MHz	816.5 (26715)	831.5 (26865)	846.5 (27015)	
LTE Band 26 (Cell): 10 MHz	819 (26740)	831.5 (26865)	844 (26990)	
LTE Band 66 (AWS): 1.4 MHz	1710.7 (131979)	1745 (132322)	1779.3 (132665)	
LTE Band 66 (AWS): 3 MHz	1711.5 (131987)	1745 (132322)	1778.5 (132657)	
LTE Band 66 (AWS): 5 MHz	1712.5 (131997)	1745 (132322)	1777.5 (132647)	
LTE Band 66 (AWS): 10 MHz	1715 (132022)	1745 (132322)	1775 (132622)	
LTE Band 66 (AWS): 15 MHz	1717.5 (132047)	1745 (132322)	1772.5 (132597)	
LTE Band 66 (AWS): 20 MHz	1720 (132072)	1745 (132322)	1770 (132572)	
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)	1732.5 (20175)	1754.3 (20393)	
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)	1732.5 (20175)	1753.5 (20385)	
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)	1732.5 (20175)	1752.5 (20375)	
LTE Band 4 (AWS): 10 MHz	1715 (20000)	1732.5 (20175)	1750 (20350)	
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)	1732.5 (20175)	1747.5 (20325)	
LTE Band 4 (AWS): 20 MHz	1720 (20050)	1732.5 (20175)	1745 (20300)	
LTE Band 25 (PCS): 1.4 MHz	1850.7 (26047)	1882.5 (26365)	1914.3 (26683)	
LTE Band 25 (PCS): 3 MHz	1851.5 (26055)	1882.5 (26365)	1913.5 (26675)	
LTE Band 25 (PCS): 5 MHz	1852.5 (26065)	1882.5 (26365)	1912.5 (26665)	
LTE Band 25 (PCS): 10 MHz	1855 (26090)	1882.5 (26365)	1910 (26640)	
LTE Band 25 (PCS): 15 MHz	1857.5 (26115)	1882.5 (26365)	1907.5 (26615)	
LTE Band 25 (PCS): 20 MHz	1860 (26140)	1882.5 (26365)	1905 (26590)	
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)	1880 (18900)	1909.3 (19193)	
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)	1880 (18900)	1908.5 (19185)	
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)	1880 (18900)	1907.5 (19175)	
LTE Band 2 (PCS): 10 MHz	1855 (18650)	1880 (18900)	1905 (19150)	
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)	1880 (18900)	1902.5 (19125)	
LTE Band 2 (PCS): 20 MHz	1860 (18700)	1880 (18900)	1900 (19100)	
LTE Band 30: 5 MHz	2307.5 (27685)	2310 (27710)	2312.5 (27735)	
LTE Band 30: 10 MHz	N/A	2310 (27710)	N/A	
LTE Band 7: 5 MHz	2502.5 (20775)	2535 (21100)	2567.5 (21425)	
LTE Band 7: 10 MHz	2505 (20800)	2535 (21100)	2565 (21400)	
LTE Band 7: 15 MHz	2507.5 (20825)	2535 (21100)	2562.5 (21375)	
LTE Band 7: 20 MHz	2510 (20850)	2535 (21100)	2560 (21350)	
LTE Band 41: 5 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)
LTE Band 41: 10 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)
LTE Band 41: 15 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)
LTE Band 41: 20 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)
UE Category	DL UE Cat 16 (QPSK, 16QAM, 64QAM, 256QAM), UL UE Cat 13 (QPSK, 16QAM, 64QAM)			
Modulations Supported in UL	QPSK, 16QAM, 64QAM			
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided)	YES			
A-MPR (Additional MPR) disabled for SAR Testing?	YES			
LTE Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations			
LTE Additional Information	This device does not support full CA features on 3GPP Release 13. It supports carrier aggregation and downlink MIMO features as shown in Section 8 and Appendix H. All other uplink communications are identical to the Release 8 specifications. Uplink communications are done on the PCC unless otherwise specified. The following LTE Release 11 Features are not supported: Relay, HetNet, Enhanced MIMO, eCIC, eMBMS, Wi-Fi Offloading, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.			

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 22 of 234

3 INTRODUCTION

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

Equation 3-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 23 of 234

4 DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




Figure 4-1 point
Sample SAR Area
Scan

Table 4-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x, y, z)
			Uniform Grid $\Delta z_{\text{zoom}}(n)$	Graded Grid		
				$\Delta z_{\text{zoom}}(1)^*$	$\Delta z_{\text{zoom}}(n>1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 22

*Also compliant to IEEE 1528-2013 Table 6

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 24 of 234

5 TEST CONFIGURATION POSITIONS

5.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

5.2 SAR Testing for Tablet per KDB Publication 616217 D04v01r02

Per FCC KDB Publication 616217 D04v01r02, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR Exclusion Threshold in KDB 447498 D01v06 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 25 of 234

6 RF EXPOSURE LIMITS

6.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 6-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 26 of 234

7 FCC MEASUREMENT PROCEDURES

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

7.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

7.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03r01, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is ≤ 1.2 W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

7.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

7.4 SAR Measurement Conditions for UMTS

7.4.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 27 of 234

7.4.2 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all “1s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH_n configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCH_n, for the highest reported SAR configuration in 12.2 kbps RMC.

7.4.3 SAR Measurements with Rel 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

7.4.4 SAR Measurements with Rel 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

7.4.5 SAR Measurement Conditions for DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

7.5 SAR Measurement Conditions for LTE

LTE modes are tested according to FCC KDB 941225 D05v02r04 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

7.5.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 28 of 234

7.5.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

7.5.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

7.5.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r04:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to $\frac{1}{2}$ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

According to FCC KDB 447498 D01v06, when the reported (scaled) SAR for LTE Band 41 is ≤ 0.6 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.

7.5.5 TDD

LTE TDD testing is performed using the SAR test guidance provided in FCC KDB 941225 D05v02r04. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05v02r04. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4.

7.5.6 Downlink Only Carrier Aggregation

Conducted power measurements with LTE Carrier Aggregation (CA) (downlink only) active are made in accordance to KDB Publication 941225 D05Av01r02. The RRC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. For every supported combination of downlink only carrier

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 29 of 234

aggregation, additional conducted output powers are measured with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band. Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for carrier aggregation configurations when the average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive.

7.6 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

7.6.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

7.6.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg.

7.6.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. Each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

7.6.4 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 30 of 234

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

7.6.5 OFDM Transmission Mode and SAR Test Channel Selection

When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

7.6.6 Initial Test Configuration Procedure

For OFDM, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order IEEE 802.11 mode. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements (See Section 7.6.5).

7.6.7 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the subsequent test configurations are required.

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 31 of 234

8 RF CONDUCTED POWERS

8.1 GSM Conducted Powers

Table 8-1
Reduced Conducted Power – Antenna 1

Maximum Burst-Averaged Output Power					
		GPRS/EDGE Data (GMSK)		EDGE Data (8-PSK)	
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
GSM 850	128	27.48	25.73	21.96	21.00
	190	27.40	25.63	21.86	20.94
	251	27.38	25.62	21.82	20.91
Calculated Maximum Frame-Averaged Output Power					
		GPRS/EDGE Data (GMSK)		EDGE Data (8-PSK)	
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
GSM 850	128	18.45	19.71	12.93	14.98
	190	18.37	19.61	12.83	14.92
	251	18.35	19.60	12.79	14.89
GSM 850	Frame Avg.Targets:	18.47	20.48	12.97	14.98

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 32 of 234

Table 8-2
Reduced Conducted Power – Antenna 3

Maximum Burst-Averaged Output Power					
		GPRS/EDGE Data (GMSK)		EDGE Data (8-PSK)	
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
GSM 850	128	29.42	26.89	24.75	23.75
	190	29.37	26.86	24.70	23.69
	251	29.28	26.83	24.66	23.63
Calculated Maximum Frame-Averaged Output Power					
		GPRS/EDGE Data (GMSK)		EDGE Data (8-PSK)	
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
GSM 850	128	20.39	20.87	15.72	17.73
	190	20.34	20.84	15.67	17.67
	251	20.25	20.81	15.63	17.61
GSM 850	Frame Avg.Targets:	21.22	21.68	15.72	17.73

FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 33 of 234

Table 8-3
Reduced Conducted Power – Antenna 4A

Maximum Burst-Averaged Output Power					
		GPRS/EDGE Data (GMSK)		EDGE Data (8-PSK)	
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
GSM 1900	512	23.80	20.80	23.80	20.80
	661	23.80	20.73	23.79	20.79
	810	23.77	20.68	23.73	20.75
Calculated Maximum Frame-Averaged Output Power					
		GPRS/EDGE Data (GMSK)		EDGE Data (8-PSK)	
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
GSM 1900	512	14.77	14.78	14.77	14.78
	661	14.77	14.71	14.76	14.77
	810	14.74	14.66	14.70	14.73
GSM 1900	Frame Avg. Targets:	15.27	15.28	15.22	15.28

FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 34 of 234

Table 8-4
Reduced Conducted Power – Antenna 4B

Maximum Burst-Averaged Output Power					
		GPRS/EDGE Data (GMSK)		EDGE Data (8-PSK)	
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
GSM 1900	512	22.68	19.70	22.77	19.70
	661	22.52	19.53	22.59	19.55
	810	22.64	19.60	22.67	19.63
Calculated Maximum Frame-Averaged Output Power					
		GPRS/EDGE Data (GMSK)		EDGE Data (8-PSK)	
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
GSM 1900	512	13.65	13.68	13.74	13.68
	661	13.49	13.51	13.56	13.53
	810	13.61	13.58	13.64	13.61
GSM 1900	Frame Avg. Targets:	14.47	14.48	14.47	14.48

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 35 of 234

Table 8-5
Reduced Conducted Power – Antenna 2A

Maximum Burst-Averaged Output Power					
		GPRS/EDGE Data (GMSK)		EDGE Data (8-PSK)	
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
GSM 1900	512	22.50	19.50	21.75	19.50
	661	22.43	19.42	21.73	19.46
	810	22.46	19.43	21.72	19.50
Calculated Maximum Frame-Averaged Output Power					
		GPRS/EDGE Data (GMSK)		EDGE Data (8-PSK)	
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
GSM 1900	512	13.47	13.48	12.72	13.48
	661	13.40	13.40	12.70	13.44
	810	13.43	13.41	12.69	13.48
GSM 1900	Frame Avg. Targets:	14.27	14.28	12.72	14.28

FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 36 of 234

Table 8-6
Reduced Conducted Power – Antenna 2B

Maximum Burst-Averaged Output Power					
		GPRS/EDGE Data (GMSK)		EDGE Data (8-PSK)	
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
GSM 1900	512	22.17	19.19	21.69	19.15
	661	22.19	19.20	21.73	19.19
	810	22.20	19.19	21.72	19.18
Calculated Maximum Frame-Averaged Output Power					
		GPRS/EDGE Data (GMSK)		EDGE Data (8-PSK)	
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
GSM 1900	512	13.14	13.17	12.66	13.13
	661	13.16	13.18	12.70	13.17
	810	13.17	13.17	12.69	13.16
GSM 1900	Frame Ava.Targets:	13.17	13.18	12.72	13.18

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 37 of 234

Note:

1. Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
2. GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
3. EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

GSM Class: C
GPRS Multislot class: 10 (Max 2 Tx uplink slots)
EDGE Multislot class: 10 (Max 2 Tx uplink slots)
DTM Multislot Class: N/A



Figure 8-1
Power Measurement Setup

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 38 of 234

8.2 UMTS Conducted Powers

Table 8-7
Reduced Conducted Power – Antenna 1

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	
99	WCDMA	12.2 kbps RMC	19.64	19.80	19.62	-
6	HSDPA	Subtest 1	19.64	19.82	19.74	0
6		Subtest 2	19.70	19.74	19.64	0
6		Subtest 3	19.69	19.71	19.62	0.5
6		Subtest 4	19.65	19.76	19.65	0.5
6	HSUPA	Subtest 1	19.49	19.58	19.46	0
6		Subtest 2	19.72	19.78	19.69	2
6		Subtest 3	19.55	19.60	19.51	1
6		Subtest 4	19.71	19.78	19.66	2
6		Subtest 5	19.68	19.77	19.68	0
8	DC-HSDPA	Subtest 1	19.62	19.75	19.71	0
8		Subtest 2	19.68	19.77	19.73	0
8		Subtest 3	19.72	19.84	19.75	0.5
8		Subtest 4	19.70	19.78	19.72	0.5

Table 8-8
Reduced Conducted Power – Antenna 3

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	
99	WCDMA	12.2 kbps RMC	20.70	20.90	20.79	-
6	HSDPA	Subtest 1	20.84	20.97	20.92	0
6		Subtest 2	20.85	21.02	20.91	0
6		Subtest 3	20.87	21.04	20.94	0.5
6		Subtest 4	20.87	21.04	20.92	0.5
6	HSUPA	Subtest 1	20.80	20.96	20.93	0
6		Subtest 2	20.86	21.02	20.89	2
6		Subtest 3	20.84	21.01	20.94	1
6		Subtest 4	20.84	21.04	20.96	2
6		Subtest 5	20.81	20.98	20.95	0
8	DC-HSDPA	Subtest 1	20.74	20.93	20.87	0
8		Subtest 2	20.78	20.97	20.88	0
8		Subtest 3	20.81	20.96	20.86	0.5
8		Subtest 4	20.81	20.99	20.89	0.5

FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 39 of 234

Table 8-9
Reduced Conducted Power – Antenna 4A

3GPP Release Version	Mode	3GPP 34.121 Subtest	AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	14.50	14.50	14.43	14.80	14.62	14.70	-
6	HSDPA	Subtest 1	14.53	14.56	14.39	14.79	14.53	14.73	0
6		Subtest 2	14.51	14.54	14.40	14.88	14.57	14.73	0
6		Subtest 3	14.58	14.57	14.41	14.87	14.60	14.70	0.5
6		Subtest 4	14.56	14.56	14.42	14.86	14.59	14.66	0.5
6	HSUPA	Subtest 1	14.49	14.51	14.39	14.61	14.38	14.47	0
6		Subtest 2	14.48	14.49	14.38	14.84	14.59	14.64	2
6		Subtest 3	14.47	14.50	14.38	14.70	14.43	14.49	1
6		Subtest 4	14.48	14.50	14.37	14.82	14.52	14.64	2
6		Subtest 5	14.54	14.55	14.40	14.84	14.56	14.66	0
8	DC-HSDPA	Subtest 1	14.53	14.47	14.34	14.85	14.58	14.68	0
8		Subtest 2	14.48	14.49	14.40	14.82	14.54	14.67	0
8		Subtest 3	14.51	14.53	14.38	14.85	14.59	14.67	0.5
8		Subtest 4	14.52	14.51	14.37	14.81	14.52	14.66	0.5

Table 8-10
Reduced Conducted Power – Antenna 4B

3GPP Release Version	Mode	3GPP 34.121 Subtest	AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	13.92	14.00	13.90	13.68	13.53	13.70	-
6	HSDPA	Subtest 1	13.90	14.12	13.93	13.67	13.44	13.65	0
6		Subtest 2	13.85	14.05	13.94	13.61	13.38	13.63	0
6		Subtest 3	13.89	14.08	13.93	13.59	13.41	13.60	0.5
6		Subtest 4	13.85	14.11	13.97	13.65	13.40	13.56	0.5
6	HSUPA	Subtest 1	13.82	14.02	13.92	13.47	13.32	13.38	0
6		Subtest 2	13.73	13.96	13.92	13.74	13.54	13.72	2
6		Subtest 3	13.81	14.01	13.94	12.95	13.29	13.44	1
6		Subtest 4	13.74	13.99	13.88	13.63	13.45	13.63	2
6		Subtest 5	13.83	14.02	13.94	13.81	13.58	13.77	0
8	DC-HSDPA	Subtest 1	13.88	14.10	13.92	13.82	13.55	13.79	0
8		Subtest 2	13.85	14.04	13.94	13.83	13.54	13.81	0
8		Subtest 3	13.88	14.07	13.92	13.78	13.58	13.77	0.5
8		Subtest 4	13.89	14.03	13.97	13.79	13.64	13.78	0.5

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 40 of 234

Table 8-11
Reduced Conducted Power – Antenna 2A

3GPP Release Version	Mode	3GPP 34.121 Subtest	AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	14.20	14.19	14.08	13.50	13.36	13.47	-
6	HSDPA	Subtest 1	14.35	14.36	14.15	13.63	13.40	13.54	0
6		Subtest 2	14.35	14.35	14.17	13.60	13.48	13.53	0
6		Subtest 3	14.37	13.36	14.20	13.67	13.46	13.51	0.5
6		Subtest 4	14.37	14.41	14.21	13.60	13.44	13.45	0.5
6	HSUPA	Subtest 1	14.33	14.34	14.14	13.57	13.43	13.43	0
6		Subtest 2	14.29	14.28	14.16	13.54	13.44	13.40	2
6		Subtest 3	14.30	14.29	14.12	13.53	13.44	13.39	1
6		Subtest 4	14.31	14.30	14.18	13.57	13.43	13.39	2
6		Subtest 5	14.31	14.32	14.15	13.61	13.47	13.43	0
8	DC-HSDPA	Subtest 1	14.16	14.30	14.20	13.60	13.44	13.43	0
8		Subtest 2	14.15	14.21	14.26	13.59	13.49	13.42	0
8		Subtest 3	14.18	14.27	14.27	13.57	13.47	13.45	0.5
8		Subtest 4	14.17	14.26	14.25	13.55	13.46	13.41	0.5

Table 8-12
Reduced Conducted Power – Antenna 2B

3GPP Release Version	Mode	3GPP 34.121 Subtest	AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	13.78	13.80	13.70	13.14	13.15	13.20	-
6	HSDPA	Subtest 1	13.89	14.06	13.81	13.28	13.28	13.24	0
6		Subtest 2	13.91	14.02	13.87	13.25	13.23	13.28	0
6		Subtest 3	13.93	14.07	13.88	13.23	13.28	13.21	0.5
6		Subtest 4	13.92	14.02	13.87	13.27	13.24	13.18	0.5
6	HSUPA	Subtest 1	13.88	14.00	13.85	13.25	13.25	13.22	0
6		Subtest 2	13.85	14.00	13.87	13.21	13.23	13.14	2
6		Subtest 3	13.84	13.95	13.83	13.20	13.22	13.09	1
6		Subtest 4	13.82	13.98	13.83	13.24	13.22	13.13	2
6		Subtest 5	13.86	13.99	13.85	13.28	13.23	13.17	0
8	DC-HSDPA	Subtest 1	13.79	14.05	13.87	13.21	13.13	13.36	0
8		Subtest 2	13.81	13.99	13.88	13.20	13.22	13.32	0
8		Subtest 3	13.86	14.02	13.89	13.22	13.19	13.41	0.5
8		Subtest 4	13.82	14.03	13.87	13.23	13.14	13.45	0.5

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 41 of 234

DC-HSDPA considerations

- 3GPP Specification 34.121-1 Release 8 Ver 8.10.0 was used for DC-HSDPA guidance
- H-Set 12 (QPSK) was confirmed to be used during DC-HSDPA measurements
- The DUT supports UE category 24 for HSDPA



Figure 8-2
Power Measurement Setup

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 42 of 234

8.3 LTE Conducted Powers

8.3.1 LTE Band 12

Table 8-13
LTE Band 12 Reduced Conducted Powers - 10 MHz Bandwidth – Antenna 1

LTE Band 12 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23095 (707.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	19.60	0	0
	1	25	19.70		0
	1	49	19.58		0
	25	0	19.60	0-1	0
	25	12	19.59		0
	25	25	19.56		0
16QAM	50	0	19.59	0-1	0
	1	0	19.68		0
	1	25	19.64		0
	1	49	19.40	0-2	0
	25	0	19.46		0
	25	12	19.42		0
64QAM	25	25	19.28	0-2	0
	50	0	19.38		0
	1	0	19.65	0-2	0
	1	25	19.63		0
	1	49	19.38	0-3	0
	25	0	19.44		0
	25	12	19.40		0
	25	25	19.28		0
	50	0	19.38		0

Note: LTE Band 12 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 8-14
LTE Band 12 Reduced Conducted Powers - 5 MHz Bandwidth– Antenna 1

LTE Band 12 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23035 (701.5 MHz)	23095 (707.5 MHz)	23155 (713.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	19.54	19.62	19.36	0	0
	1	12	19.46	19.49	19.29		0
	1	24	19.58	19.37	19.47		0
	12	0	19.48	19.47	19.36	0-1	0
	12	6	19.46	19.46	19.28		0
	12	13	19.44	19.37	19.37		0
16QAM	25	0	19.46	19.47	19.29	0-1	0
	1	0	19.63	19.63	19.45		0
	1	12	19.57	19.56	19.44		0
	1	24	19.65	19.46	19.60	0-2	0
	12	0	19.36	19.40	19.25		0
	12	6	19.35	19.39	19.20		0
64QAM	12	13	19.36	19.30	19.29	0-2	0
	25	0	19.34	19.37	19.22		0
	1	0	19.62	19.66	19.46	0-2	0
	1	12	19.59	19.60	19.40		0
	1	24	19.60	19.46	19.54	0-3	0
	12	0	19.38	19.38	19.23		0
12	6	19.40	19.35	19.20	0		
12	13	19.35	19.27	19.32	0		
	25	0	19.34	19.36	19.20	0	

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 43 of 234

Table 8-15
LTE Band 12 Reduced Conducted Powers - 3 MHz Bandwidth– Antenna 1

LTE Band 12 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	19.48	19.47	19.30	0	0
	1	7	19.49	19.58	19.41		0
	1	14	19.43	19.37	19.41		0
	8	0	19.52	19.52	19.37	0-1	0
	8	4	19.48	19.52	19.38		0
	8	7	19.48	19.44	19.38		0
	15	0	19.50	19.50	19.42		0
16QAM	1	0	19.57	19.61	19.35	0-1	0
	1	7	19.61	19.61	19.53		0
	1	14	19.57	19.46	19.52		0
	8	0	19.47	19.45	19.32	0-2	0
	8	4	19.39	19.44	19.32		0
	8	7	19.39	19.35	19.32		0
	15	0	19.37	19.43	19.31		0
64QAM	1	0	19.60	19.53	19.36	0-2	0
	1	7	19.56	19.69	19.55		0
	1	14	19.56	19.41	19.54		0
	8	0	19.45	19.44	19.28	0-3	0
	8	4	19.39	19.42	19.33		0
	8	7	19.40	19.36	19.32		0
	15	0	19.36	19.40	19.29		0

Table 8-16
LTE Band 12 Reduced Conducted Powers -1.4 MHz Bandwidth– Antenna 1

LTE Band 12 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	19.52	19.53	19.43	0	0
	1	2	19.49	19.51	19.41		0
	1	5	19.49	19.54	19.48		0
	3	0	19.51	19.52	19.42		0
	3	2	19.49	19.53	19.41		0
	3	3	19.53	19.52	19.47		0
	6	0	19.50	19.53	19.40	0-1	0
16QAM	1	0	19.62	19.59	19.56	0-1	0
	1	2	19.58	19.59	19.53		0
	1	5	19.57	19.58	19.58		0
	3	0	19.46	19.51	19.44		0
	3	2	19.44	19.50	19.42		0
	3	3	19.45	19.49	19.48		0
	6	0	19.43	19.41	19.38	0-2	0
64QAM	1	0	19.61	19.65	19.50	0-2	0
	1	2	19.53	19.61	19.49		0
	1	5	19.54	19.63	19.65		0
	3	0	19.45	19.48	19.40		0
	3	2	19.40	19.47	19.33		0
	3	3	19.42	19.47	19.47		0
	6	0	19.39	19.44	19.36	0-3	0

FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 44 of 234

Table 8-17
LTE Band 12 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 3

LTE Band 12 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23095 (707.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	19.96	0	0
	1	25	19.88		0
	1	49	19.84		0
	25	0	19.93	0-1	0
	25	12	19.91		0
	25	25	19.87		0
	50	0	19.92		0
16QAM	1	0	19.99	0-1	0
	1	25	19.95		0
	1	49	19.97		0
	25	0	19.77	0-2	0
	25	12	19.79		0
	25	25	19.70		0
	50	0	19.84		0
64QAM	1	0	19.98	0-2	0
	1	25	19.96		0
	1	49	19.99		0
	25	0	19.78	0-3	0
	25	12	19.81		0
	25	25	19.71		0
	50	0	19.82		0

Note: LTE Band 12 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 8-18
LTE Band 12 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 3

LTE Band 12 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23035 (701.5 MHz)	23095 (707.5 MHz)	23155 (713.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	19.75	19.93	19.75	0	0
	1	12	19.62	19.91	19.68		0
	1	24	19.77	19.84	19.82		0
	12	0	19.77	19.82	19.63	0-1	0
	12	6	19.69	19.81	19.59		0
	12	13	19.76	19.75	19.64		0
16QAM	25	0	19.72	19.82	19.62	0	
	1	0	19.97	20.00	19.75	0-1	0
	1	12	20.00	19.99	19.83		0
	1	24	20.00	19.98	19.84		0
	12	0	19.84	19.81	19.77	0-2	0
	12	6	19.87	19.84	19.67		0
12	13	19.88	19.83	19.72	0		
64QAM	25	0	19.85	19.80	19.73	0	
	1	0	19.98	19.97	19.87	0-2	0
	1	12	19.91	19.96	19.86		0
	1	24	19.97	19.95	19.97		0
	12	0	19.76	19.79	19.57	0-3	0
	12	6	19.69	19.75	19.51		0
12	13	19.74	19.71	19.56	0		
	25	0	19.68	19.73	19.54	0	

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 45 of 234

Table 8-19
LTE Band 12 Reduced Conducted Powers - 3 MHz Bandwidth- Antenna 3

LTE Band 12 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	19.86	19.81	19.69	0	0
	1	7	19.89	19.89	19.84		0
	1	14	19.82	19.78	19.83		0
	8	0	19.96	19.90	19.79	0-1	0
	8	4	19.95	19.92	19.83		0
	8	7	19.95	19.85	19.82		0
	15	0	19.97	19.93	19.85		0
16QAM	1	0	19.98	19.91	19.85	0-1	0
	1	7	20.00	19.99	19.97		0
	1	14	19.99	19.91	19.95		0
	8	0	19.94	19.84	19.72	0-2	0
	8	4	19.90	19.85	19.80		0
	8	7	19.95	19.82	19.77		0
	15	0	19.87	19.83	19.76		0
64QAM	1	0	19.96	19.95	19.74	0-2	0
	1	7	19.98	19.97	19.80		0
	1	14	19.94	19.93	19.89		0
	8	0	19.76	19.81	19.52	0-3	0
	8	4	19.74	19.79	19.60		0
	8	7	19.75	19.73	19.58		0
	15	0	19.77	19.78	19.57		0

Table 8-20
LTE Band 12 Reduced Conducted Powers -1.4 MHz Bandwidth- Antenna 3

LTE Band 12							
1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	20.00	19.85	19.78	0	0
	1	2	19.99	19.84	19.75		0
	1	5	19.98	19.87	19.83		0
	3	0	19.92	19.88	19.79		0
	3	2	19.92	19.89	19.78		0
	3	3	19.93	19.89	19.84		0
	6	0	19.91	19.88	19.77	0-1	0
16QAM	1	0	20.00	19.92	19.96	0-1	0
	1	2	19.99	19.93	19.90		0
	1	5	20.00	19.97	19.87		0
	3	0	19.95	19.89	19.74		0
	3	2	19.90	19.90	19.73		0
	3	3	19.88	19.92	19.81		0
	6	0	19.91	19.86	19.72	0-2	0
64QAM	1	0	19.96	19.98	19.82	0-2	0
	1	2	19.98	19.96	19.86		0
	1	5	19.99	19.97	19.94		0
	3	0	19.94	19.94	19.74		0
	3	2	19.92	19.90	19.68		0
	3	3	19.93	19.88	19.80		0
	6	0	19.77	19.78	19.67	0-3	0

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 46 of 234

8.3.2 LTE Band 13

Table 8-21
LTE Band 13 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 1

LTE Band 13 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	21.30	0	0
	1	25	21.03		0
	1	49	21.22		0
	25	0	21.12	0-1	0
	25	12	21.15		0
	25	25	21.11		0
	50	0	21.14		0
16QAM	1	0	21.30	0-1	0
	1	25	21.07		0
	1	49	21.01		0
	25	0	20.88	0-2	0
	25	12	20.82		0
	25	25	20.83		0
	50	0	20.87		0
64QAM	1	0	21.21	0-2	0
	1	25	20.98		0
	1	49	20.96		0
	25	0	21.10	0-3	0
	25	12	21.15		0
	25	25	21.16		0
	50	0	21.14		0

Table 8-22
LTE Band 13 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 1

LTE Band 13 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	21.06	0	0
	1	12	20.97		0
	1	24	20.98		0
	12	0	20.93	0-1	0
	12	6	20.94		0
	12	13	20.95		0
	25	0	20.96		0
16QAM	1	0	21.12	0-1	0
	1	12	21.02		0
	1	24	21.02		0
	12	0	20.83	0-2	0
	12	6	20.80		0
	12	13	20.81		0
	25	0	20.80		0
64QAM	1	0	21.14	0-2	0
	1	12	21.06		0
	1	24	21.04		0
	12	0	21.01	0-3	0
	12	6	21.10		0
	12	13	21.14		0
	25	0	21.06		0

Note: LTE Band 13 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 47 of 234

Table 8-23
LTE Band 13 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 3

LTE Band 13 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	21.27	0	0
	1	25	21.18		0
	1	49	21.30		0
	25	0	21.27	0-1	0
	25	12	21.21		0
	25	25	21.30		0
	50	0	21.29		0
16QAM	1	0	21.25	0-1	0
	1	25	21.20		0
	1	49	21.30		0
	25	0	20.90	0-2	0
	25	12	20.88		0
	25	25	21.03		0
	50	0	20.93		0
64QAM	1	0	21.25	0-2	0
	1	25	21.23		0
	1	49	21.29		0
	25	0	20.90	0-3	0
	25	12	20.88		0
	25	25	21.02		0
	50	0	20.99		0

Table 8-24
LTE Band 13 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 3

LTE Band 13 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	21.25	0	0
	1	12	21.18		0
	1	24	21.30		0
	12	0	21.11	0-1	0
	12	6	21.10		0
	12	13	21.20		0
	25	0	21.15		0
16QAM	1	0	21.27	0-1	0
	1	12	21.20		0
	1	24	21.30		0
	12	0	21.00	0-2	0
	12	6	21.00		0
	12	13	21.05		0
	25	0	21.00		0
64QAM	1	0	21.24	0-2	0
	1	12	21.18		0
	1	24	21.25		0
	12	0	20.93	0-3	0
	12	6	20.93		0
	12	13	21.01		0
	25	0	20.97		0

Note: LTE Band 13 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 48 of 234

8.3.1 LTE Band 14

Table 8-25
LTE Band 14 Reduced Conducted Powers - 10 MHz Bandwidth – Antenna 1

LTE Band 14 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23330 (793.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	21.25	0	0
	1	25	21.22		0
	1	49	21.21		0
	25	0	21.24	0-1	0
	25	12	21.17		0
	25	25	21.18		0
	50	0	21.22		0
16QAM	1	0	21.27	0-1	0
	1	25	21.20		0
	1	49	21.16		0
	25	0	20.90	0-2	0
	25	12	20.81		0
	25	25	20.67		0
	50	0	20.81		0
64QAM	1	0	21.11	0-2	0
	1	25	20.97		0
	1	49	20.92		0
	25	0	21.10	0-3	0
	25	12	21.02		0
	25	25	21.06		0
	50	0	21.10		0

Table 8-26
LTE Band 14 Reduced Conducted Powers - 5 MHz Bandwidth– Antenna 1

LTE Band 14 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23330 (793.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	21.09	0	0
	1	12	21.00		0
	1	24	20.86		0
	12	0	21.02	0-1	0
	12	6	21.00		0
	12	13	21.01		0
	25	0	21.00		0
16QAM	1	0	21.28	0-1	0
	1	12	21.26		0
	1	24	21.15		0
	12	0	20.83	0-2	0
	12	6	20.80		0
	12	13	20.69		0
	25	0	20.78		0
64QAM	1	0	21.10	0-2	0
	1	12	21.03		0
	1	24	20.88		0
	12	0	21.04	0-3	0
	12	6	21.02		0
	12	13	21.01		0
	25	0	21.08		0

Note: LTE Band 14 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 49 of 234

Table 8-27
LTE Band 14 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 3

LTE Band 14 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23330 (793.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	21.30	0	0
	1	25	21.22		0
	1	49	21.23		0
	25	0	21.29	0-1	0
	25	12	21.23		0
	25	25	21.25		0
	50	0	21.23		0
16QAM	1	0	21.27	0-1	0
	1	25	21.10		0
	1	49	21.17		0
	25	0	21.00	0-2	0
	25	12	20.90		0
	25	25	20.91		0
	50	0	20.90		0
64QAM	1	0	21.28	0-2	0
	1	25	21.22		0
	1	49	21.18		0
	25	0	20.97	0-3	0
	25	12	20.92		0
	25	25	20.93		0
	50	0	20.91		0

Table 8-28
LTE Band 14 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 3

LTE Band 14 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23330 (793.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	21.25	0	0
	1	12	21.18		0
	1	24	21.15		0
	12	0	21.12	0-1	0
	12	6	21.11		0
	12	13	21.00		0
	25	0	21.14		0
16QAM	1	0	21.30	0-1	0
	1	12	21.25		0
	1	24	21.15		0
	12	0	21.00	0-2	0
	12	6	21.00		0
	12	13	20.90		0
	25	0	20.98		0
64QAM	1	0	21.21	0-2	0
	1	12	21.17		0
	1	24	21.23		0
	12	0	20.92	0-3	0
	12	6	20.94		0
	12	13	20.87		0
	25	0	20.90		0

Note: LTE Band 14 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 50 of 234

8.3.2 LTE Band 5 (Cell)

Table 8-29
LTE Band 5 (Cell) Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 1

LTE Band 5 (Cell) 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20525 (836.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	20.16	0	0
	1	25	20.28		0
	1	49	20.21		0
	25	0	20.29	0-1	0
	25	12	20.27		0
	25	25	20.28		0
	50	0	20.27		0
16QAM	1	0	20.15	0-1	0
	1	25	20.27		0
	1	49	20.30		0
	25	0	20.09	0-2	0
	25	12	20.09		0
	25	25	20.17		0
	50	0	20.11		0
64QAM	1	0	20.13	0-2	0
	1	25	20.28		0
	1	49	20.30		0
	25	0	20.08	0-3	0
	25	12	20.11		0
	25	25	20.19		0
	50	0	20.12		0

Note: LTE Band 5 (Cell) at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 8-30
LTE Band 5 (Cell) Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 1

LTE Band 5 (Cell) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20425 (826.5 MHz)	20525 (836.5 MHz)	20625 (846.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	20.14	20.27	20.19	0	0
	1	12	20.03	20.28	20.20		0
	1	24	20.00	20.30	20.19		0
	12	0	20.08	20.25	20.19	0-1	0
	12	6	20.04	20.26	20.17		0
	12	13	20.00	20.30	20.22		0
	25	0	20.06	20.28	20.19		0
16QAM	1	0	20.20	20.22	20.20	0-1	0
	1	12	20.12	20.23	20.05		0
	1	24	20.00	20.30	20.07		0
	12	0	19.94	20.07	19.98	0-2	0
	12	6	19.91	20.08	19.91		0
	12	13	19.87	20.17	19.88		0
	25	0	19.89	20.08	19.90		0
64QAM	1	0	20.17	20.19	20.18	0-2	0
	1	12	20.12	20.23	20.12		0
	1	24	19.98	20.25	20.09		0
	12	0	19.96	20.08	19.99	0-3	0
	12	6	19.92	20.09	19.89		0
	12	13	19.86	20.20	19.87		0
	25	0	19.91	20.10	19.91		0

FCC ID: BCGA1934	 SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 51 of 234

Table 8-31
LTE Band 5 (Cell) Reduced Conducted Powers - 3 MHz Bandwidth- Antenna 1

LTE Band 5 (Cell) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20415 (825.5 MHz)	20525 (836.5 MHz)	20635 (847.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	20.11	20.23	20.19	0	0
	1	7	20.11	20.29	20.27		0
	1	14	20.02	20.30	20.15		0
	8	0	20.14	20.28	20.22	0-1	0
	8	4	20.09	20.29	20.25		0
	8	7	20.09	20.30	20.23		0
	15	0	20.10	20.27	20.25		0
16QAM	1	0	20.15	20.24	20.19	0-1	0
	1	7	20.08	20.28	20.29		0
	1	14	20.01	20.29	20.19		0
	8	0	20.01	20.11	20.06	0-2	0
	8	4	20.00	20.13	20.08		0
	8	7	19.97	20.20	20.08		0
	15	0	19.96	20.12	20.07		0
64QAM	1	0	20.16	20.25	20.15	0-2	0
	1	7	20.18	20.25	20.27		0
	1	14	20.04	20.30	20.15		0
	8	0	20.04	20.14	20.08	0-3	0
	8	4	19.97	20.12	20.12		0
	8	7	19.98	20.21	20.07		0
	15	0	19.96	20.09	20.10		0

Table 8-32
LTE Band 5 (Cell) Reduced Conducted Powers -1.4 MHz Bandwidth- Antenna 1

LTE Band 5 (Cell) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20407 (824.7 MHz)	20525 (836.5 MHz)	20643 (848.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	20.16	20.29	20.25	0	0
	1	2	20.13	20.27	20.24		0
	1	5	20.14	20.30	20.22		0
	3	0	20.16	20.29	20.25		0
	3	2	20.14	20.28	20.25		0
	3	3	20.14	20.30	20.19		0
	6	0	20.16	20.28	20.24	0-1	0
16QAM	1	0	20.19	20.29	20.21	0-1	0
	1	2	20.15	20.24	20.14		0
	1	5	20.17	20.29	20.17		0
	3	0	20.06	20.18	20.08		0
	3	2	20.05	20.16	20.05		0
	3	3	20.02	20.20	20.05		0
	6	0	20.06	20.17	20.01	0-2	0
64QAM	1	0	20.16	20.28	20.18	0-2	0
	1	2	20.14	20.30	20.16		0
	1	5	20.19	20.29	20.15		0
	3	0	20.07	20.20	20.08		0
	3	2	20.05	20.17	20.03		0
	3	3	20.04	20.22	20.06		0
	6	0	20.01	20.18	20.01	0-3	0

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 52 of 234

Table 8-33
LTE Band 5 (Cell) Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 3

LTE Band 5 (Cell) 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20525 (836.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	21.18	0	0
	1	25	21.28		0
	1	49	21.33		0
	25	0	21.35	0-1	0
	25	12	21.35		0
	25	25	21.36		0
	50	0	21.32		0
16QAM	1	0	21.22	0-1	0
	1	25	21.38		0
	1	49	21.23		0
	25	0	21.13	0-2	0
	25	12	21.15		0
	25	25	21.13		0
	50	0	21.17		0
64QAM	1	0	21.25	0-2	0
	1	25	21.37		0
	1	49	21.38		0
	25	0	21.15	0-3	0
	25	12	21.17		0
	25	25	21.18		0
	50	0	21.20		0

Note: LTE Band 5 (Cell) at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 8-34
LTE Band 5 (Cell) Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 3

LTE Band 5 (Cell) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20425 (826.5 MHz)	20525 (836.5 MHz)	20625 (846.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.04	21.15	21.07	0	0
	1	12	20.97	21.15	21.08		0
	1	24	20.96	21.18	21.16		0
	12	0	20.94	21.16	21.06	0-1	0
	12	6	20.91	21.15	21.06		0
	12	13	20.94	21.15	21.14		0
	25	0	20.98	21.18	21.08		0
16QAM	1	0	21.16	21.33	21.23	0-1	0
	1	12	21.00	21.25	21.29		0
	1	24	21.12	21.30	21.32		0
	12	0	20.96	21.16	21.04	0-2	0
	12	6	20.89	21.14	21.04		0
	12	13	20.92	21.16	21.07		0
	25	0	20.93	21.15	21.04		0
64QAM	1	0	21.22	21.38	21.36	0-2	0
	1	12	21.29	21.37	21.32		0
	1	24	21.36	21.36	21.37		0
	12	0	20.98	21.16	21.05	0-3	0
	12	6	20.95	21.19	21.02		0
	12	13	21.02	21.20	21.09		0
	25	0	20.98	21.16	21.03		0

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 53 of 234

Table 8-35
LTE Band 5 (Cell) Reduced Conducted Powers - 3 MHz Bandwidth- Antenna 3

LTE Band 5 (Cell) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20415 (825.5 MHz)	20525 (836.5 MHz)	20635 (847.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.00	21.16	21.24	0	0
	1	7	20.93	21.21	21.19		0
	1	14	20.91	21.16	21.10		0
	8	0	21.02	21.20	21.10	0-1	0
	8	4	20.94	21.19	21.18		0
	8	7	20.94	21.20	21.19		0
	15	0	20.93	21.18	21.16		0
16QAM	1	0	21.13	21.39	21.18	0-1	0
	1	7	21.13	21.33	21.34		0
	1	14	21.04	21.19	21.24		0
	8	0	21.07	21.30	21.08	0-2	0
	8	4	20.95	21.17	21.11		0
	8	7	20.94	21.11	21.13		0
	15	0	20.98	21.20	21.11		0
64QAM	1	0	21.22	21.31	21.31	0-2	0
	1	7	21.19	21.39	21.38		0
	1	14	21.23	21.35	21.37		0
	8	0	21.03	21.21	21.15	0-3	0
	8	4	20.96	21.20	21.20		0
	8	7	20.99	21.23	21.22		0
	15	0	20.95	21.22	21.11		0

Table 8-36
LTE Band 5 (Cell) Reduced Conducted Powers -1.4 MHz Bandwidth- Antenna 3

LTE Band 5 (Cell) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20407 (824.7 MHz)	20525 (836.5 MHz)	20643 (848.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	20.96	21.19	21.14	0	0
	1	2	20.93	21.15	21.15		0
	1	5	20.91	21.18	21.13		0
	3	0	20.95	21.19	21.14		0
	3	2	20.93	21.18	21.14		0
	3	3	20.94	21.17	21.13		0
	6	0	20.95	21.19	21.12	0-1	0
16QAM	1	0	21.11	21.34	21.34	0-1	0
	1	2	21.16	21.36	21.32		0
	1	5	21.08	21.33	21.30		0
	3	0	21.11	21.24	21.25		0
	3	2	21.08	21.23	21.24		0
	3	3	21.07	21.22	21.21		0
	6	0	21.04	21.17	21.17	0-2	0
64QAM	1	0	21.17	21.37	21.36	0-2	0
	1	2	21.11	21.34	21.37		0
	1	5	21.05	21.37	21.27		0
	3	0	21.03	21.19	21.17		0
	3	2	21.05	21.25	21.21		0
	3	3	21.13	21.24	21.16		0
	6	0	20.97	21.08	21.12	0-3	0

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 54 of 234

8.3.3 LTE Band 26 (Cell)

Table 8-37
LTE Band 26 (Cell) Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 1

LTE Band 26 (Cell) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26740 (819.0 MHz)	26865 (831.5 MHz)	26990 (844.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	20.28	20.09	20.29	0	0
	1	25	20.30	20.16	20.13		0
	1	49	20.29	20.29	20.17		0
	25	0	20.26	20.07	20.14	0-1	0
	25	12	20.29	20.17	20.06		0
	25	25	20.30	20.22	20.13		0
	50	0	20.29	20.20	20.12		0
16QAM	1	0	20.19	20.10	20.26	0-1	0
	1	25	20.30	20.06	20.30		0
	1	49	20.20	20.28	20.13		0
	25	0	20.12	19.85	20.05	0-2	0
	25	12	20.15	19.91	19.91		0
	25	25	20.08	20.02	19.99		0
	50	0	20.18	19.93	20.01		0
64QAM	1	0	20.24	20.12	20.30	0-2	0
	1	25	20.29	20.03	20.15		0
	1	49	20.15	20.23	20.11		0
	25	0	20.13	19.85	20.06	0-3	0
	25	12	20.17	19.91	19.93		0
	25	25	20.05	20.02	20.00		0
	50	0	20.18	19.94	20.02		0

Table 8-38
LTE Band 26 (Cell) Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 1

LTE Band 26 (Cell) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26715 (816.5 MHz)	26865 (831.5 MHz)	27015 (846.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	20.16	20.02	20.17	0	0
	1	12	20.21	20.13	20.11		0
	1	24	20.24	20.17	20.07		0
	12	0	20.14	20.07	20.10	0-1	0
	12	6	20.20	20.12	20.08		0
	12	13	20.23	20.16	20.09		0
	25	0	20.22	20.14	20.11		0
16QAM	1	0	20.20	20.02	20.11	0-1	0
	1	12	20.23	20.11	20.09		0
	1	24	20.28	20.20	20.01		0
	12	0	19.98	19.94	19.94	0-2	0
	12	6	20.04	19.96	19.92		0
	12	13	20.06	19.98	19.92		0
	25	0	20.00	19.97	19.94		0
64QAM	1	0	20.23	20.05	20.17	0-2	0
	1	12	20.25	20.21	20.21		0
	1	24	20.26	20.22	20.14		0
	12	0	19.97	19.91	19.97	0-3	0
	12	6	20.04	19.98	19.93		0
	12	13	20.08	20.00	19.95		0
	25	0	20.07	19.97	19.94		0

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 55 of 234

Table 8-39
LTE Band 26 (Cell) Reduced Conducted Powers - 3 MHz Bandwidth- Antenna 1

LTE Band 26 (Cell) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26705 (815.5 MHz)	26865 (831.5 MHz)	27025 (847.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	20.16	20.06	20.11	0	0
	1	7	20.19	20.14	20.15		0
	1	14	20.21	20.11	20.06		0
	8	0	20.17	20.08	20.13	0-1	0
	8	4	20.16	20.13	20.12		0
	8	7	20.23	20.14	20.14		0
	15	0	20.15	20.12	20.12		0
16QAM	1	0	20.16	20.01	20.12	0-1	0
	1	7	20.17	20.11	20.16		0
	1	14	20.08	20.17	20.07		0
	8	0	20.01	19.93	19.97	0-2	0
	8	4	19.98	19.97	19.95		0
	8	7	20.06	19.96	19.97		0
	15	0	19.96	19.95	19.95		0
64QAM	1	0	20.17	20.05	20.14	0-2	0
	1	7	20.20	20.14	20.19		0
	1	14	20.25	20.13	20.12		0
	8	0	20.05	19.92	19.99	0-3	0
	8	4	20.00	19.98	19.98		0
	8	7	20.09	19.97	20.00		0
	15	0	19.99	19.93	19.96		0

Table 8-40
LTE Band 26 (Cell) Reduced Conducted Powers -1.4 MHz Bandwidth- Antenna 1

LTE Band 26 (Cell) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26697 (814.7 MHz)	26865 (831.5 MHz)	27033 (848.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	20.19	20.16	20.20	0	0
	1	2	20.17	20.14	20.17		0
	1	5	20.18	20.16	20.11		0
	3	0	20.17	20.16	20.17		0
	3	2	20.16	20.15	20.16		0
	3	3	20.17	20.14	20.10		0
	6	0	20.15	20.15	20.18	0-1	0
16QAM	1	0	20.15	20.14	20.13	0-1	0
	1	2	20.13	20.11	20.17		0
	1	5	20.11	20.12	20.06		0
	3	0	20.02	20.06	20.01		0
	3	2	19.99	20.00	19.99		0
	3	3	19.96	19.99	19.98		0
	6	0	19.95	19.93	19.93	0-2	0
64QAM	1	0	20.11	20.17	20.18	0-2	0
	1	2	20.17	20.19	20.13		0
	1	5	20.13	20.13	20.07		0
	3	0	20.02	20.04	20.04		0
	3	2	20.03	20.07	20.07		0
	3	3	20.02	20.06	19.95		0
	6	0	19.93	19.96	19.96	0-3	0

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 56 of 234

Table 8-41
LTE Band 26 (Cell) Reduced Conducted Powers - 10 MHz Bandwidth – Antenna 3

LTE Band 26 (Cell) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26740 (819.0 MHz)	26865 (831.5 MHz)	26990 (844.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.28	21.16	21.39	0	0
	1	25	21.40	21.16	21.20		0
	1	49	21.31	21.39	21.31		0
	25	0	21.29	21.17	21.21	0-1	0
	25	12	21.31	21.15	21.12		0
	25	25	21.38	21.29	21.22		0
	50	0	21.36	21.17	21.20		0
16QAM	1	0	21.14	21.24	21.33	0-1	0
	1	25	21.29	21.12	21.15		0
	1	49	21.07	21.28	21.25		0
	25	0	21.05	20.97	21.04	0-2	0
	25	12	21.04	20.95	20.92		0
	25	25	21.05	21.04	21.05		0
	50	0	21.10	20.96	21.02		0
64QAM	1	0	21.22	21.18	21.39	0-2	0
	1	25	21.34	21.18	21.32		0
	1	49	21.32	21.38	21.36		0
	25	0	21.09	21.03	21.05	0-3	0
	25	12	21.13	20.95	20.93		0
	25	25	21.13	21.05	20.85		0
	50	0	21.13	20.98	20.95		0

Table 8-42
LTE Band 26 (Cell) Reduced Conducted Powers - 5 MHz Bandwidth– Antenna 3

LTE Band 26 (Cell) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26715 (816.5 MHz)	26865 (831.5 MHz)	27015 (846.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.00	20.91	20.98	0	0
	1	12	21.06	20.98	21.02		0
	1	24	21.03	20.96	21.05		0
	12	0	20.93	20.92	21.04	0-1	0
	12	6	21.05	20.95	20.99		0
	12	13	21.07	20.98	21.06		0
	25	0	21.07	20.99	21.02		0
16QAM	1	0	21.16	21.06	21.13	0-1	0
	1	12	21.16	21.12	21.11		0
	1	24	21.19	21.09	21.10		0
	12	0	21.07	20.89	20.96	0-2	0
	12	6	20.99	20.94	20.92		0
	12	13	20.99	20.93	20.97		0
	25	0	20.99	20.95	20.91		0
64QAM	1	0	21.34	21.20	21.35	0-2	0
	1	12	21.37	21.22	21.29		0
	1	24	21.39	21.34	21.37		0
	12	0	21.03	20.98	21.07	0-3	0
	12	6	21.13	20.97	21.04		0
	12	13	21.14	21.02	21.09		0
	25	0	21.09	20.97	21.05		0

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 57 of 234

Table 8-43
LTE Band 26 (Cell) Reduced Conducted Powers - 3 MHz Bandwidth– Antenna 3

LTE Band 26 (Cell) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26705 (815.5 MHz)	26865 (831.5 MHz)	27025 (847.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.12	20.91	21.00	0	0
	1	7	21.12	21.02	21.09		0
	1	14	21.04	20.95	21.01		0
	8	0	21.10	20.94	21.01	0-1	0
	8	4	21.10	20.98	21.07		0
	8	7	21.06	20.99	21.00		0
	15	0	21.08	20.97	21.07		0
16QAM	1	0	21.10	21.03	21.08	0-1	0
	1	7	21.18	21.13	21.22		0
	1	14	21.14	21.04	21.06		0
	8	0	21.10	20.92	20.94	0-2	0
	8	4	21.09	20.96	20.94		0
	8	7	21.03	20.98	21.00		0
	15	0	21.06	20.94	20.99		0
64QAM	1	0	21.28	21.13	21.32	0-2	0
	1	7	21.32	21.27	21.39		0
	1	14	21.35	21.31	21.36		0
	8	0	21.09	21.00	21.12	0-3	0
	8	4	21.06	21.03	21.19		0
	8	7	21.13	21.07	21.23		0
	15	0	21.01	21.02	21.14		0

Table 8-44
LTE Band 26 (Cell) Reduced Conducted Powers -1.4 MHz Bandwidth– Antenna 3

LTE Band 26 (Cell) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26697 (814.7 MHz)	26865 (831.5 MHz)	27033 (848.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.18	21.02	21.10	0	0
	1	2	21.20	20.99	21.03		0
	1	5	21.16	21.01	21.09		0
	3	0	21.17	21.00	21.03		0
	3	2	21.14	20.98	21.02		0
	3	3	21.15	20.99	21.04		0
	6	0	21.14	21.00	21.02	0-1	0
16QAM	1	0	21.18	21.17	21.22	0-1	0
	1	2	21.20	21.11	21.27		0
	1	5	21.14	21.09	21.13		0
	3	0	21.06	21.00	21.03		0
	3	2	21.04	21.02	21.05		0
	3	3	21.02	20.92	21.01		0
	6	0	20.99	20.93	20.96	0-2	0
64QAM	1	0	21.29	21.33	21.38	0-2	0
	1	2	21.30	21.22	21.37		0
	1	5	21.35	21.36	21.39		0
	3	0	21.24	21.16	21.25		0
	3	2	21.24	21.17	21.33		0
	3	3	21.21	21.18	21.27		0
	6	0	21.04	21.05	21.25	0-3	0

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 58 of 234

8.3.4 LTE Band 66 (AWS)

Table 8-45
LTE Band 66 (AWS) Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 4A

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.93	14.80	14.86	0	0
	1	50	14.97	14.79	14.81		0
	1	99	15.00	14.77	14.84		0
	50	0	14.97	14.82	14.70	0-1	0
	50	25	14.91	14.83	14.74		0
	50	50	14.91	14.79	14.77		0
	100	0	14.93	14.84	14.81		0
16QAM	1	0	14.82	14.86	14.69	0-1	0
	1	50	14.91	14.78	14.66		0
	1	99	14.96	14.77	14.75		0
	50	0	14.87	14.79	14.57	0-2	0
	50	25	14.84	14.75	14.62		0
	50	50	14.88	14.69	14.63		0
	100	0	14.88	14.80	14.70		0
64QAM	1	0	14.91	14.99	14.70	0-2	0
	1	50	14.92	14.96	14.62		0
	1	99	14.99	14.98	14.67		0
	50	0	14.79	14.68	14.46	0-3	0
	50	25	14.59	14.56	14.34		0
	50	50	14.53	14.54	14.38		0
	100	0	14.56	14.56	14.42		0

Table 8-46
LTE Band 66 (AWS) Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 4A

LTE Band 66 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.78	14.87	14.55	0	0
	1	36	14.93	14.79	14.57		0
	1	74	14.95	14.72	14.67		0
	36	0	14.81	14.76	14.57	0-1	0
	36	18	14.88	14.73	14.59		0
	36	37	14.84	14.64	14.61		0
	75	0	14.91	14.73	14.59		0
16QAM	1	0	14.75	14.86	14.57	0-1	0
	1	36	14.98	14.79	14.58		0
	1	74	14.97	14.81	14.77		0
	36	0	14.57	14.56	14.37	0-2	0
	36	18	14.70	14.53	14.36		0
	36	37	14.67	14.44	14.41		0
	75	0	14.70	14.52	14.39		0
64QAM	1	0	14.81	14.81	14.74	0-2	0
	1	36	14.98	14.93	14.63		0
	1	74	14.97	14.96	14.82		0
	36	0	14.56	14.64	14.53	0-3	0
	36	18	14.48	14.57	14.43		0
	36	37	14.53	14.56	14.43		0
	75	0	14.53	14.54	14.44		0

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 59 of 234

Table 8-47
LTE Band 66 (AWS) Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 4A

LTE Band 66 (AWS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.76	14.79	14.61	0	0
	1	25	14.90	14.67	14.65		0
	1	49	14.88	14.68	14.66		0
	25	0	14.77	14.65	14.55	0-1	0
	25	12	14.80	14.65	14.58		0
	25	25	14.85	14.68	14.65		0
	50	0	14.82	14.64	14.61		0
16QAM	1	0	14.76	14.72	14.65	0-1	0
	1	25	14.92	14.70	14.68		0
	1	49	14.95	14.76	14.74		0
	25	0	14.58	14.51	14.38	0-2	0
	25	12	14.65	14.50	14.42		0
	25	25	14.71	14.53	14.42		0
	50	0	14.63	14.51	14.44		0
64QAM	1	0	14.90	14.87	14.72	0-2	0
	1	25	14.84	14.90	14.73		0
	1	49	14.95	14.98	14.81		0
	25	0	14.47	14.56	14.44	0-3	0
	25	12	14.48	14.53	14.43		0
	25	25	14.57	14.56	14.42		0
	50	0	14.55	14.55	14.39		0

Table 8-48
LTE Band 66 (AWS) Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 4A

LTE Band 66 (AWS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131997 (1712.5 MHz)	132322 (1745.0 MHz)	132647 (1777.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.78	14.70	14.70	0	0
	1	12	14.80	14.70	14.77		0
	1	24	14.93	14.81	14.74		0
	12	0	14.80	14.69	14.73	0-1	0
	12	6	14.79	14.70	14.75		0
	12	13	14.81	14.71	14.71		0
	25	0	14.81	14.72	14.72		0
16QAM	1	0	14.83	14.75	14.76	0-1	0
	1	12	14.77	14.81	14.75		0
	1	24	14.97	14.86	14.76		0
	12	0	14.68	14.56	14.56	0-2	0
	12	6	14.68	14.44	14.60		0
	12	13	14.75	14.56	14.54		0
	25	0	14.66	14.57	14.58		0
64QAM	1	0	14.87	14.84	14.89	0-2	0
	1	12	14.75	14.81	14.95		0
	1	24	14.92	14.93	14.96		0
	12	0	14.58	14.63	14.50	0-3	0
	12	6	14.51	14.61	14.44		0
	12	13	14.54	14.62	14.45		0
	25	0	14.52	14.62	14.47		0

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 60 of 234

Table 8-49
LTE Band 66 (AWS) Reduced Conducted Powers - 3 MHz Bandwidth- Antenna 4A

LTE Band 66 (AWS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.82	14.75	14.79	0	0
	1	7	14.89	14.81	14.81		0
	1	14	14.92	14.74	14.73		0
	8	0	14.87	14.80	14.81	0-1	0
	8	4	14.90	14.79	14.74		0
	8	7	14.90	14.82	14.75		0
	15	0	14.89	14.79	14.75		0
16QAM	1	0	14.92	14.95	14.64	0-1	0
	1	7	14.98	14.99	14.48		0
	1	14	14.97	14.94	14.54		0
	8	0	14.90	14.92	14.45	0-2	0
	8	4	14.92	14.91	14.39		0
	8	7	14.91	14.91	14.40		0
	15	0	14.89	14.85	14.31		0
64QAM	1	0	14.66	14.92	14.66	0-2	0
	1	7	14.73	14.90	14.85		0
	1	14	14.74	14.88	14.73		0
	8	0	14.53	14.65	14.50	0-3	0
	8	4	14.52	14.67	14.50		0
	8	7	14.49	14.69	14.49		0
	15	0	14.53	14.70	14.44		0

Table 8-50
LTE Band 66 (AWS) Reduced Conducted Powers -1.4 MHz Bandwidth- Antenna 4A

LTE Band 66 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131979 (1710.7 MHz)	132322 (1745.0 MHz)	132665 (1779.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.97	14.91	14.89	0	0
	1	2	14.98	14.89	14.87		0
	1	5	14.99	14.98	14.88		0
	3	0	14.96	14.91	14.85		0
	3	2	14.97	14.88	14.85		0
	3	3	14.98	14.89	14.86		0
	6	0	14.97	14.88	14.85	0-1	0
16QAM	1	0	14.91	14.92	14.88	0-1	0
	1	2	14.92	14.98	14.91		0
	1	5	14.87	14.94	14.97		0
	3	0	14.77	14.81	14.72		0
	3	2	14.83	14.83	14.76		0
	3	3	14.78	14.79	14.73		0
	6	0	14.75	14.76	14.74	0-2	0
64QAM	1	0	14.73	14.97	14.81	0-2	0
	1	2	14.83	14.97	14.66		0
	1	5	14.85	14.99	14.75		0
	3	0	14.62	14.81	14.67		0
	3	2	14.64	14.86	14.65		0
	3	3	14.64	14.77	14.62		0
	6	0	14.58	14.73	14.53	0-3	0

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 61 of 234

Table 8-51
LTE Band 66 (AWS) Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 4B

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.50	14.47	14.42	0	0
	1	50	14.41	14.38	14.36		0
	1	99	14.44	14.27	14.36		0
	50	0	14.43	14.36	14.30	0-1	0
	50	25	14.34	14.36	14.28		0
	50	50	14.38	14.32	14.29		0
	100	0	14.42	14.41	14.33		0
16QAM	1	0	14.50	14.50	14.46	0-1	0
	1	50	14.38	14.33	14.34		0
	1	99	14.45	14.34	14.36		0
	50	0	14.22	14.32	14.16	0-2	0
	50	25	14.20	14.25	14.22		0
	50	50	14.22	14.20	14.22		0
	100	0	14.27	14.28	14.28		0
64QAM	1	0	14.32	14.50	14.09	0-2	0
	1	50	14.25	14.49	14.01		0
	1	99	14.42	14.43	13.95		0
	50	0	13.91	14.06	13.78	0-3	0
	50	25	13.93	14.02	13.77		0
	50	50	13.95	14.04	13.78		0
	100	0	13.97	14.04	13.80		0

Table 8-52
LTE Band 66 (AWS) Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 4B

LTE Band 66 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.44	14.47	14.30	0	0
	1	36	14.40	14.34	14.37		0
	1	74	14.39	14.28	14.30		0
	36	0	14.38	14.45	14.34	0-1	0
	36	18	14.39	14.36	14.33		0
	36	37	14.38	14.31	14.29		0
	75	0	14.41	14.35	14.34		0
16QAM	1	0	14.45	14.50	14.37	0-1	0
	1	36	14.38	14.41	14.38		0
	1	74	14.42	14.37	14.30		0
	36	0	14.23	14.28	14.25	0-2	0
	36	18	14.24	14.25	14.24		0
	36	37	14.21	14.21	14.20		0
	75	0	14.25	14.24	14.25		0
64QAM	1	0	14.21	14.48	14.11	0-2	0
	1	36	14.25	14.47	14.18		0
	1	74	14.19	14.41	14.03		0
	36	0	13.91	14.07	13.89	0-3	0
	36	18	13.92	14.08	13.90		0
	36	37	13.94	14.09	13.86		0
	75	0	13.95	14.05	13.91		0

FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 62 of 234

Table 8-53
LTE Band 66 (AWS) Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 4B

LTE Band 66 (AWS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.44	14.49	14.36	0	0
	1	25	14.40	14.32	14.32		0
	1	49	14.39	14.32	14.29		0
	25	0	14.36	14.38	14.30	0-1	0
	25	12	14.35	14.33	14.29		0
	25	25	14.36	14.32	14.26		0
	50	0	14.38	14.35	14.30		0
16QAM	1	0	14.49	14.49	14.46	0-1	0
	1	25	14.41	14.39	14.33		0
	1	49	14.33	14.40	14.38		0
	25	0	14.20	14.29	14.22	0-2	0
	25	12	14.19	14.26	14.20		0
	25	25	14.18	14.21	14.17		0
	50	0	14.22	14.24	14.21		0
64QAM	1	0	14.25	14.45	14.10	0-2	0
	1	25	14.18	14.47	14.16		0
	1	49	14.19	14.44	14.27		0
	25	0	13.91	14.07	13.94	0-3	0
	25	12	13.93	14.06	13.92		0
	25	25	13.98	14.08	13.91		0
	50	0	13.96	14.07	13.90		0

Table 8-54
LTE Band 66 (AWS) Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 4B

LTE Band 66 (AWS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131997 (1712.5 MHz)	132322 (1745.0 MHz)	132647 (1777.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.42	14.45	14.35	0	0
	1	12	14.34	14.37	14.27		0
	1	24	14.41	14.38	14.33		0
	12	0	14.40	14.43	14.29	0-1	0
	12	6	14.36	14.37	14.28		0
	12	13	14.38	14.37	14.29		0
	25	0	14.38	14.41	14.30		0
16QAM	1	0	14.39	14.50	14.43	0-1	0
	1	12	14.39	14.42	14.35		0
	1	24	14.37	14.41	14.41		0
	12	0	14.27	14.35	14.23	0-2	0
	12	6	14.20	14.30	14.22		0
	12	13	14.24	14.30	14.24		0
	25	0	14.21	14.29	14.23		0
64QAM	1	0	14.31	14.45	14.23	0-2	0
	1	12	14.25	14.38	14.26		0
	1	24	14.33	14.42	14.29		0
	12	0	14.05	14.21	13.95	0-3	0
	12	6	14.01	14.17	13.90		0
	12	13	14.01	14.16	13.93		0
	25	0	13.99	14.14	13.96		0

FCC ID: BCGA1934	 SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 63 of 234

Table 8-55
LTE Band 66 (AWS) Reduced Conducted Powers - 3 MHz Bandwidth- Antenna 4B

LTE Band 66 (AWS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.45	14.49	14.39	0	0
	1	7	14.50	14.47	14.46		0
	1	14	14.38	14.42	14.41		0
	8	0	14.50	14.49	14.44	0-1	0
	8	4	14.48	14.48	14.43		0
	8	7	14.44	14.45	14.41		0
16QAM	15	0	14.50	14.48	14.44	0	
	1	0	14.29	14.47	14.36	0-1	0
	1	7	14.41	14.44	14.38		0
	1	14	14.24	14.38	14.34		0
	8	0	14.31	14.36	14.26	0-2	0
	8	4	14.29	14.33	14.28		0
8	7	14.23	14.34	14.30	0		
64QAM	15	0	14.28	14.33	14.25	0	
	1	0	14.09	14.46	14.18	0-2	0
	1	7	14.23	14.39	14.19		0
	1	14	14.07	14.29	14.17		0
	8	0	14.05	14.25	13.98	0-3	0
	8	4	14.06	14.20	14.02		0
	8	7	13.97	14.19	14.06		0
	15	0	14.04	14.21	13.97		0

Table 8-56
LTE Band 66 (AWS) Reduced Conducted Powers -1.4 MHz Bandwidth- Antenna 4B

LTE Band 66 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131979 (1710.7 MHz)	132322 (1745.0 MHz)	132665 (1779.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.49	14.47	14.43	0	0
	1	2	14.47	14.45	14.42		0
	1	5	14.47	14.48	14.45		0
	3	0	14.48	14.47	14.44		0
	3	2	14.46	14.46	14.43		0
	3	3	14.47	14.48	14.45		0
	6	0	14.47	14.47	14.43	0-1	0
16QAM	1	0	14.41	14.47	14.45	0-1	0
	1	2	14.37	14.42	14.40		0
	1	5	14.40	14.45	14.48		0
	3	0	14.31	14.36	14.31		0
	3	2	14.34	14.39	14.34		0
	3	3	14.31	14.36	14.30		0
64QAM	6	0	14.33	14.34	14.29	0-2	0
	1	0	14.23	14.47	14.25	0-2	0
	1	2	14.14	14.42	14.22		0
	1	5	14.23	14.40	14.18		0
	3	0	14.19	14.31	14.09		0
	3	2	14.24	14.29	14.12		0
	3	3	14.18	14.32	14.14		0
	6	0	14.04	14.22	14.05	0-3	0

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 64 of 234

Table 8-57
LTE Band 66 (AWS) Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 2A

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.60	14.70	14.63	0	0
	1	50	14.59	14.68	14.62		0
	1	99	14.58	14.63	14.62		0
	50	0	14.60	14.66	14.51	0-1	0
	50	25	14.62	14.57	14.57		0
	50	50	14.59	14.53	14.58		0
	100	0	14.65	14.58	14.64		0
16QAM	1	0	14.57	14.54	14.59	0-1	0
	1	50	14.55	14.56	14.58		0
	1	99	14.56	14.56	14.55		0
	50	0	14.41	14.39	14.39	0-2	0
	50	25	14.38	14.35	14.39		0
	50	50	14.39	14.37	14.42		0
	100	0	14.44	14.38	14.49		0
64QAM	1	0	14.62	14.70	14.44	0-2	0
	1	50	14.69	14.69	14.38		0
	1	99	14.70	14.65	14.51		0
	50	0	14.43	14.33	14.27	0-3	0
	50	25	14.28	14.27	14.15		0
	50	50	14.32	14.19	14.18		0
	100	0	14.32	14.18	14.22		0

Table 8-58
LTE Band 66 (AWS) Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 2A

LTE Band 66 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.52	14.49	14.53	0	0
	1	36	14.63	14.48	14.54		0
	1	74	14.56	14.43	14.51		0
	36	0	14.52	14.45	14.49	0-1	0
	36	18	14.50	14.42	14.47		0
	36	37	14.55	14.45	14.50		0
	75	0	14.60	14.43	14.51		0
16QAM	1	0	14.53	14.59	14.61	0-1	0
	1	36	14.55	14.55	14.65		0
	1	74	14.60	14.52	14.60		0
	36	0	14.42	14.37	14.38	0-2	0
	36	18	14.40	14.31	14.37		0
	36	37	14.43	14.32	14.42		0
	75	0	14.42	14.33	14.38		0
64QAM	1	0	14.53	14.68	14.58	0-2	0
	1	36	14.69	14.66	14.62		0
	1	74	14.70	14.58	14.60		0
	36	0	14.31	14.32	14.29	0-3	0
	36	18	14.23	14.29	14.20		0
	36	37	14.27	14.26	14.22		0
	75	0	14.28	14.22	14.23		0

FCC ID: BCGA1934	 SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 65 of 234

Table 8-59
LTE Band 66 (AWS) Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 2A

LTE Band 66 (AWS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.56	14.50	14.60	0	0
	1	25	14.59	14.45	14.57		0
	1	49	14.61	14.46	14.55		0
	25	0	14.54	14.41	14.49	0-1	0
	25	12	14.56	14.39	14.52		0
	25	25	14.59	14.40	14.54		0
	50	0	14.57	14.42	14.42		0
16QAM	1	0	14.48	14.58	14.56	0-1	0
	1	25	14.55	14.53	14.55		0
	1	49	14.56	14.48	14.59		0
	25	0	14.38	14.30	14.42	0-2	0
	25	12	14.39	14.32	14.38		0
	25	25	14.45	14.31	14.39		0
	50	0	14.41	14.30	14.35		0
64QAM	1	0	14.54	14.67	14.60	0-2	0
	1	25	14.62	14.63	14.63		0
	1	49	14.68	14.64	14.53		0
	25	0	14.27	14.30	14.22	0-3	0
	25	12	14.24	14.22	14.15		0
	25	25	14.27	14.24	14.19		0
	50	0	14.24	14.24	14.19		0

Table 8-60
LTE Band 66 (AWS) Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 2A

LTE Band 66 (AWS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131997 (1712.5 MHz)	132322 (1745.0 MHz)	132647 (1777.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.55	14.51	14.57	0	0
	1	12	14.52	14.52	14.55		0
	1	24	14.60	14.47	14.52		0
	12	0	14.55	14.44	14.54	0-1	0
	12	6	14.57	14.43	14.53		0
	12	13	14.59	14.44	14.51		0
	25	0	14.55	14.44	14.54		0
16QAM	1	0	14.60	14.55	14.66	0-1	0
	1	12	14.62	14.58	14.62		0
	1	24	14.59	14.50	14.60		0
	12	0	14.43	14.38	14.46	0-2	0
	12	6	14.44	14.37	14.51		0
	12	13	14.46	14.40	14.41		0
	25	0	14.43	14.36	14.46		0
64QAM	1	0	14.65	14.60	14.67	0-2	0
	1	12	14.56	14.50	14.65		0
	1	24	14.67	14.62	14.63		0
	12	0	14.28	14.33	14.30	0-3	0
	12	6	14.26	14.28	14.27		0
	12	13	14.34	14.32	14.24		0
	25	0	14.28	14.27	14.22		0

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 66 of 234

Table 8-61
LTE Band 66 (AWS) Reduced Conducted Powers - 3 MHz Bandwidth- Antenna 2A

LTE Band 66 (AWS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.53	14.42	14.56	0	0
	1	7	14.57	14.47	14.55		0
	1	14	14.55	14.42	14.48		0
	8	0	14.57	14.47	14.59	0-1	0
	8	4	14.57	14.45	14.55		0
	8	7	14.59	14.47	14.53		0
16QAM	15	0	14.56	14.46	14.53		0
	1	0	14.53	14.59	14.60	0-1	0
	1	7	14.61	14.62	14.65		0
	1	14	14.47	14.52	14.55		0
	8	0	14.46	14.44	14.50	0-2	0
	8	4	14.47	14.42	14.46		0
8	7	14.51	14.45	14.45	0		
64QAM	15	0	14.43	14.38	14.40		0
	1	0	14.45	14.69	14.60	0-2	0
	1	7	14.59	14.62	14.61		0
	1	14	14.56	14.68	14.61		0
	8	0	14.30	14.39	14.31	0-3	0
	8	4	14.27	14.35	14.24		0
	8	7	14.30	14.34	14.22		0
		15	0	14.25	14.37	14.19	

Table 8-62
LTE Band 66 (AWS) Reduced Conducted Powers -1.4 MHz Bandwidth- Antenna 2A

LTE Band 66 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131979 (1710.7 MHz)	132322 (1745.0 MHz)	132665 (1779.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.43	14.39	14.41	0	0
	1	2	14.39	14.35	14.39		0
	1	5	14.44	14.38	14.38		0
	3	0	14.41	14.37	14.41		0
	3	2	14.40	14.36	14.40		0
	3	3	14.41	14.38	14.42		0
	6	0	14.42	14.35	14.41	0-1	0
16QAM	1	0	14.58	14.55	14.59	0-1	0
	1	2	14.62	14.62	14.65		0
	1	5	14.65	14.61	14.50		0
	3	0	14.48	14.51	14.52		0
	3	2	14.52	14.44	14.49		0
	3	3	14.52	14.45	14.50	0	
64QAM	6	0	14.53	14.40	14.47	0-2	0
	1	0	14.58	14.66	14.52	0-2	0
	1	2	14.56	14.62	14.62		0
	1	5	14.61	14.57	14.53		0
	3	0	14.45	14.52	14.38		0
	3	2	14.42	14.51	14.28		0
	3	3	14.43	14.48	14.36	0-3	0
	6	0	14.31	14.37	14.26		0

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 67 of 234

Table 8-63
LTE Band 66 (AWS) Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 2B

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.23	14.30	14.05	0	0
	1	50	14.20	14.26	13.99		0
	1	99	14.29	14.20	14.01		0
	50	0	14.14	14.21	14.02	0-1	0
	50	25	14.11	14.14	14.00		0
	50	50	14.15	14.10	13.98		0
	100	0	14.15	14.20	14.07		0
16QAM	1	0	14.21	14.22	14.23	0-1	0
	1	50	14.25	14.29	14.22		0
	1	99	14.30	14.26	14.30		0
	50	0	13.79	13.94	14.11	0-2	0
	50	25	13.72	13.89	14.10		0
	50	50	13.78	13.87	14.07		0
	100	0	13.73	13.93	14.14		0
64QAM	1	0	14.23	14.25	13.94	0-2	0
	1	50	14.22	14.28	13.99		0
	1	99	14.29	14.27	13.92		0
	50	0	13.92	13.91	13.77	0-3	0
	50	25	13.82	13.84	13.64		0
	50	50	13.83	13.81	13.63		0
	100	0	13.87	13.80	13.67		0

Table 8-64
LTE Band 66 (AWS) Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 2B

LTE Band 66 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.16	14.28	14.21	0	0
	1	36	14.22	14.29	14.19		0
	1	74	14.24	14.22	14.14		0
	36	0	14.13	14.25	14.13	0-1	0
	36	18	14.15	14.23	14.16		0
	36	37	14.08	14.13	14.07		0
	75	0	14.17	14.23	14.19		0
16QAM	1	0	14.21	14.30	14.28	0-1	0
	1	36	14.28	14.30	14.15		0
	1	74	14.30	14.27	14.22		0
	36	0	14.00	14.18	14.03	0-2	0
	36	18	14.05	14.12	13.96		0
	36	37	13.98	14.04	13.98		0
	75	0	14.04	14.11	13.97		0
64QAM	1	0	14.26	14.17	13.98	0-2	0
	1	36	14.25	14.15	13.92		0
	1	74	14.27	14.22	14.04		0
	36	0	13.83	13.90	13.82	0-3	0
	36	18	13.79	13.83	13.67		0
	36	37	13.81	13.82	13.66		0
	75	0	13.80	13.81	13.69		0

FCC ID: BCGA1934	 SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 68 of 234

Table 8-65
LTE Band 66 (AWS) Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 2B

LTE Band 66 (AWS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.19	14.28	14.22	0	0
	1	25	14.20	14.25	14.11		0
	1	49	14.16	14.22	14.13		0
	25	0	14.13	14.22	14.07	0-1	0
	25	12	14.14	14.21	14.06		0
	25	25	14.17	14.23	14.07		0
	50	0	14.15	14.22	14.08		0
16QAM	1	0	14.24	14.30	14.27	0-1	0
	1	25	14.20	14.29	14.23		0
	1	49	14.28	14.19	14.19		0
	25	0	14.03	14.11	13.95	0-2	0
	25	12	14.01	14.10	13.93		0
	25	25	14.05	14.13	13.92		0
	50	0	14.04	14.10	13.94		0
64QAM	1	0	14.18	14.26	14.04	0-2	0
	1	25	14.20	14.22	14.02		0
	1	49	14.30	14.20	14.14		0
	25	0	13.84	13.92	13.66	0-3	0
	25	12	13.86	13.84	13.68		0
	25	25	13.90	13.88	13.72		0
	50	0	13.91	13.89	13.72		0

Table 8-66
LTE Band 66 (AWS) Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 2B

LTE Band 66 (AWS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131997 (1712.5 MHz)	132322 (1745.0 MHz)	132647 (1777.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.16	14.27	14.23	0	0
	1	12	14.13	14.28	14.19		0
	1	24	14.20	14.30	14.22		0
	12	0	14.10	14.29	14.18	0-1	0
	12	6	14.13	14.28	14.17		0
	12	13	14.15	14.30	14.12		0
	25	0	14.13	14.28	14.18		0
16QAM	1	0	14.21	14.29	14.25	0-1	0
	1	12	14.23	14.30	14.17		0
	1	24	14.25	14.30	14.25		0
	12	0	13.92	14.14	13.98	0-2	0
	12	6	13.93	14.12	13.99		0
	12	13	13.95	14.15	14.02		0
	25	0	13.91	14.10	13.95		0
64QAM	1	0	14.28	14.28	14.02	0-2	0
	1	12	14.15	14.28	14.04		0
	1	24	14.26	14.26	14.09		0
	12	0	13.93	13.92	13.80	0-3	0
	12	6	13.90	13.88	13.77		0
	12	13	13.93	13.92	13.78		0
	25	0	13.88	13.93	13.76		0

FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 69 of 234

Table 8-67
LTE Band 66 (AWS) Reduced Conducted Powers - 3 MHz Bandwidth- Antenna 2B

LTE Band 66 (AWS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.11	14.28	14.13	0	0
	1	7	14.16	14.30	14.17		0
	1	14	14.13	14.26	14.12		0
	8	0	14.15	14.29	14.14	0-1	0
	8	4	14.16	14.28	14.13		0
	8	7	14.16	14.30	14.15		0
	15	0	14.14	14.25	14.13		0
16QAM	1	0	14.17	14.23	14.21	0-1	0
	1	7	14.24	14.26	14.29		0
	1	14	14.24	14.17	14.25		0
	8	0	14.09	14.05	14.11	0-2	0
	8	4	14.10	14.09	14.11		0
	8	7	14.13	14.09	14.05		0
	15	0	14.07	14.02	14.03		0
64QAM	1	0	14.12	14.19	14.06	0-2	0
	1	7	14.22	14.22	14.10		0
	1	14	14.20	14.26	14.01		0
	8	0	13.97	13.97	13.84	0-3	0
	8	4	13.88	13.97	13.83		0
	8	7	13.88	13.99	13.82		0
	15	0	13.89	13.95	13.84		0

Table 8-68
LTE Band 66 (AWS) Reduced Conducted Powers -1.4 MHz Bandwidth- Antenna 2B

LTE Band 66 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131979 (1710.7 MHz)	132322 (1745.0 MHz)	132665 (1779.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.18	14.27	14.26	0	0
	1	2	14.16	14.26	14.23		0
	1	5	14.17	14.30	14.22		0
	3	0	14.15	14.30	14.22		0
	3	2	14.14	14.29	14.21		0
	3	3	14.17	14.27	14.22		0
	6	0	14.15	14.28	14.19	0-1	0
16QAM	1	0	14.22	14.30	14.25	0-1	0
	1	2	14.14	14.29	14.18		0
	1	5	14.28	14.20	14.24		0
	3	0	14.16	14.19	14.08		0
	3	2	14.11	14.21	14.02		0
	3	3	14.10	14.23	14.11		0
	6	0	14.07	14.14	14.03	0-2	0
64QAM	1	0	14.19	14.26	14.12	0-2	0
	1	2	14.14	14.26	14.14		0
	1	5	14.22	14.22	14.12		0
	3	0	14.11	14.10	14.00		0
	3	2	14.09	14.08	13.93		0
	3	3	14.07	14.12	13.97		0
	6	0	13.92	14.04	13.81	0-3	0

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 70 of 234

8.3.5 LTE Band 25 (PCS)

Table 8-69
LTE Band 25 (PCS) Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 4A

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	15.29	15.11	15.20	0	0
	1	50	15.06	14.99	15.06		0
	1	99	15.19	15.10	15.22		0
	50	0	15.18	15.11	15.16	0-1	0
	50	25	15.06	15.08	15.03		0
	50	50	15.12	15.09	15.12		0
	100	0	15.14	15.12	15.10		0
16QAM	1	0	15.30	15.14	15.28	0-1	0
	1	50	15.24	15.06	15.13		0
	1	99	15.06	15.28	15.17		0
	50	0	14.98	14.88	15.05	0-2	0
	50	25	15.03	14.89	14.98		0
	50	50	14.88	14.98	14.85		0
	100	0	15.08	14.95	15.07		0
64QAM	1	0	15.30	15.28	15.02	0-2	0
	1	50	15.29	15.11	14.92		0
	1	99	15.24	15.13	14.96		0
	50	0	15.16	15.08	14.92	0-3	0
	50	25	15.06	14.84	14.76		0
	50	50	14.98	14.82	14.73		0
	100	0	15.02	14.86	14.86		0

Table 8-70
LTE Band 25 (PCS) Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 4A

LTE Band 25 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26115 (1857.5 MHz)	26365 (1882.5 MHz)	26615 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	15.28	15.17	15.30	0	0
	1	36	15.23	15.16	15.08		0
	1	74	15.10	15.24	15.26		0
	36	0	15.30	15.05	15.30	0-1	0
	36	18	15.28	15.23	15.18		0
	36	37	15.23	15.25	15.28		0
	75	0	15.29	15.12	15.28		0
16QAM	1	0	15.26	15.11	15.25	0-1	0
	1	36	15.21	15.08	15.07		0
	1	74	15.06	15.16	15.04		0
	36	0	14.99	14.85	15.00	0-2	0
	36	18	15.05	14.88	14.87		0
	36	37	14.98	14.97	14.86		0
	75	0	15.04	14.90	14.93		0
64QAM	1	0	15.29	15.08	14.86	0-2	0
	1	36	15.25	15.10	14.96		0
	1	74	15.20	15.04	15.03		0
	36	0	15.18	14.92	14.82	0-3	0
	36	18	15.06	14.81	14.74		0
	36	37	14.99	14.80	14.82		0
	75	0	14.98	14.82	14.88		0

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 71 of 234

Table 8-71
LTE Band 25 (PCS) Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 4A

LTE Band 25 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	15.27	15.17	15.23	0	0
	1	25	15.15	15.16	15.07		0
	1	49	15.22	15.26	15.12		0
	25	0	15.18	15.19	15.08	0-1	0
	25	12	15.16	15.19	15.07		0
	25	25	15.23	15.18	15.08		0
	50	0	15.17	15.16	15.08		0
16QAM	1	0	15.27	15.07	15.20	0-1	0
	1	25	15.19	15.06	15.05		0
	1	49	15.20	15.16	15.12		0
	25	0	14.99	14.87	14.85	0-2	0
	25	12	14.95	14.88	14.84		0
	25	25	15.04	14.90	14.86		0
	50	0	14.96	14.89	14.86		0
64QAM	1	0	15.27	15.10	14.92	0-2	0
	1	25	15.25	15.01	15.02		0
	1	49	15.11	15.09	15.06		0
	25	0	15.04	14.81	14.82	0-3	0
	25	12	15.05	14.78	14.77		0
	25	25	15.01	14.77	14.85		0
	50	0	14.98	14.76	14.84		0

Table 8-72
LTE Band 25 (PCS) Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 4A

LTE Band 25 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	15.28	15.19	15.23	0	0
	1	12	15.26	15.19	15.16		0
	1	24	15.28	15.24	15.18		0
	12	0	15.30	15.12	15.15	0-1	0
	12	6	15.29	15.20	15.15		0
	12	13	15.28	15.25	15.10		0
	25	0	15.29	15.21	15.15		0
16QAM	1	0	15.22	15.05	15.09	0-1	0
	1	12	15.18	15.07	15.11		0
	1	24	15.13	15.08	15.11		0
	12	0	15.07	14.92	14.89	0-2	0
	12	6	14.98	14.93	14.89		0
	12	13	15.01	14.95	14.86		0
	25	0	14.98	14.89	14.89		0
64QAM	1	0	15.29	15.04	15.20	0-2	0
	1	12	15.28	15.08	15.09		0
	1	24	15.30	14.95	15.10		0
	12	0	15.13	14.71	14.93	0-3	0
	12	6	15.15	14.70	14.93		0
	12	13	15.16	14.69	14.89		0
	25	0	15.13	14.72	14.92		0

FCC ID: BCGA1934	 SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 72 of 234

Table 8-73
LTE Band 25 (PCS) Reduced Conducted Powers - 3 MHz Bandwidth- Antenna 4A

LTE Band 25 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	15.25	15.08	15.13	0	0
	1	7	15.30	15.18	15.13		0
	1	14	15.24	15.19	15.12		0
	8	0	15.30	15.20	15.18	0-1	0
	8	4	15.29	15.18	15.11		0
	8	7	15.28	15.18	15.11		0
	15	0	15.29	15.19	15.12		0
16QAM	1	0	15.18	15.02	15.09	0-1	0
	1	7	15.26	15.05	15.03		0
	1	14	15.12	15.05	15.10		0
	8	0	15.10	14.94	14.95	0-2	0
	8	4	15.10	14.92	14.90		0
	8	7	15.03	14.91	14.91		0
	15	0	15.07	14.90	14.86		0
64QAM	1	0	15.26	14.94	15.15	0-2	0
	1	7	15.28	15.07	15.06		0
	1	14	15.17	15.06	15.01		0
	8	0	15.12	14.83	14.43	0-3	0
	8	4	15.10	14.81	14.89		0
	8	7	15.12	14.79	14.87		0
	15	0	15.12	14.78	14.86		0

Table 8-74
LTE Band 25 (PCS) Reduced Conducted Powers -1.4 MHz Bandwidth- Antenna 4A

LTE Band 25 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	15.27	15.08	15.12	0	0
	1	2	15.27	15.12	15.12		0
	1	5	15.30	15.15	15.17		0
	3	0	15.28	15.13	15.11		0
	3	2	15.30	15.19	15.11		0
	3	3	15.30	15.18	15.17		0
	6	0	15.30	15.12	15.11	0-1	0
16QAM	1	0	15.20	15.09	15.04	0-1	0
	1	2	15.23	15.08	15.08		0
	1	5	15.25	15.07	15.10		0
	3	0	15.11	14.97	14.94		0
	3	2	15.12	14.94	14.94		0
	3	3	15.12	14.96	15.00		0
	6	0	15.07	14.93	14.90	0-2	0
64QAM	1	0	15.27	15.05	15.15	0-2	0
	1	2	15.25	14.98	15.12		0
	1	5	15.28	14.97	15.09		0
	3	0	15.24	14.88	15.01		0
	3	2	15.29	14.85	14.98		0
	3	3	15.23	14.98	15.02		0
	6	0	15.13	14.83	14.95	0-3	0

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 73 of 234

Table 8-75
LTE Band 25 (PCS) Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 4B

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.11	14.20	14.14	0	0
	1	50	13.95	14.10	14.08		0
	1	99	13.99	14.16	14.19		0
	50	0	14.08	14.10	14.00	0-1	0
	50	25	14.02	14.05	14.00		0
	50	50	14.02	14.05	14.18		0
	100	0	14.09	14.07	14.11		0
16QAM	1	0	14.18	14.20	14.17	0-1	0
	1	50	14.03	14.09	14.09		0
	1	99	14.17	14.16	14.16		0
	50	0	14.01	14.04	14.02	0-2	0
	50	25	13.93	13.99	13.96		0
	50	50	14.01	14.02	14.06		0
	100	0	13.99	14.06	14.07		0
64QAM	1	0	14.19	14.14	14.09	0-2	0
	1	50	14.16	14.17	13.89		0
	1	99	14.20	14.16	14.04		0
	50	0	14.04	13.86	13.82	0-3	0
	50	25	13.88	13.88	13.81		0
	50	50	13.96	13.87	13.96		0
	100	0	13.95	13.84	13.95		0

Table 8-76
LTE Band 25 (PCS) Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 4B

LTE Band 25 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26115 (1857.5 MHz)	26365 (1882.5 MHz)	26615 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.15	14.19	14.07	0	0
	1	36	13.98	14.00	14.06		0
	1	74	14.10	14.09	14.11		0
	36	0	14.07	14.13	14.03	0-1	0
	36	18	14.00	14.04	14.05		0
	36	37	14.01	14.09	14.15		0
	75	0	14.04	14.11	14.10		0
16QAM	1	0	14.20	14.16	14.08	0-1	0
	1	36	14.06	14.01	14.11		0
	1	74	14.16	14.17	14.13		0
	36	0	13.98	13.99	13.94	0-2	0
	36	18	13.91	13.89	13.98		0
	36	37	13.92	13.98	14.09		0
	75	0	13.95	14.00	14.02		0
64QAM	1	0	14.19	14.10	14.02	0-2	0
	1	36	14.13	13.98	14.05		0
	1	74	14.09	14.02	14.12		0
	36	0	14.05	13.81	13.86	0-3	0
	36	18	14.01	13.68	13.78		0
	36	37	13.96	13.76	13.91		0
	75	0	13.92	13.76	13.92		0

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 74 of 234

Table 8-77
LTE Band 25 (PCS) Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 4B

LTE Band 25 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.20	14.19	14.11	0	0
	1	25	14.17	14.07	14.20		0
	1	49	14.09	14.16	14.14		0
	25	0	14.17	14.11	14.12	0-1	0
	25	12	14.15	14.02	14.20		0
	25	25	14.09	14.05	14.19		0
	50	0	14.19	14.12	14.20		0
16QAM	1	0	14.20	14.16	13.97	0-1	0
	1	25	14.07	14.04	14.17		0
	1	49	14.03	14.10	14.16		0
	25	0	14.00	13.94	13.91	0-2	0
	25	12	13.98	13.88	13.98		0
	25	25	13.90	13.92	13.96		0
	50	0	13.99	13.97	14.02		0
64QAM	1	0	14.17	14.01	13.96	0-2	0
	1	25	14.10	13.91	14.13		0
	1	49	13.97	13.96	14.11		0
	25	0	14.05	13.70	13.78	0-3	0
	25	12	14.02	13.66	13.93		0
	25	25	13.94	13.65	13.92		0
	50	0	13.96	13.66	13.91		0

Table 8-78
LTE Band 25 (PCS) Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 4B

LTE Band 25 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.20	14.12	14.20	0	0
	1	12	14.19	14.08	14.18		0
	1	24	14.15	14.06	14.04		0
	12	0	14.18	14.09	14.12	0-1	0
	12	6	14.19	14.04	14.10		0
	12	13	14.16	14.10	14.01		0
	25	0	14.20	14.13	14.13		0
16QAM	1	0	14.15	14.09	14.19	0-1	0
	1	12	14.14	14.07	14.20		0
	1	24	14.19	14.07	14.05		0
	12	0	14.07	13.88	14.03	0-2	0
	12	6	14.01	13.90	14.02		0
	12	13	14.03	13.95	13.95		0
	25	0	14.00	13.96	14.04		0
64QAM	1	0	14.19	13.96	14.19	0-2	0
	1	12	14.18	13.87	14.15		0
	1	24	14.18	13.84	14.02		0
	12	0	14.15	13.63	13.82	0-3	0
	12	6	14.04	13.58	13.84		0
	12	13	14.05	13.63	13.76		0
	25	0	14.03	13.62	13.82		0

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 75 of 234

Table 8-79
LTE Band 25 (PCS) Reduced Conducted Powers - 3 MHz Bandwidth- Antenna 4B

LTE Band 25 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.15	14.04	14.20	0	0
	1	7	14.19	14.08	14.17		0
	1	14	14.14	14.00	14.07		0
	8	0	14.20	14.07	14.20	0-1	0
	8	4	14.18	14.10	14.14		0
	8	7	14.20	14.09	14.13		0
15	0	14.19	14.11	14.15	0		
16QAM	1	0	14.14	14.03	14.20	0-1	0
	1	7	14.18	14.14	14.18		0
	1	14	14.15	14.08	14.10		0
	8	0	14.11	13.97	14.14	0-2	0
	8	4	14.03	14.00	14.05		0
	8	7	14.06	14.01	14.03		0
15	0	14.05	14.01	14.04	0		
64QAM	1	0	14.06	13.74	14.02	0-2	0
	1	7	14.13	13.84	14.01		0
	1	14	14.03	13.73	13.96		0
	8	0	13.94	13.60	13.85	0-3	0
	8	4	13.97	13.64	13.80		0
	8	7	13.92	13.64	13.78		0
	15	0	13.94	13.64	13.81		0

Table 8-80
LTE Band 25 (PCS) Reduced Conducted Powers -1.4 MHz Bandwidth- Antenna 4B

LTE Band 25 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.18	14.03	14.15	0	0
	1	2	14.14	14.01	14.12		0
	1	5	14.20	14.10	14.10		0
	3	0	14.17	14.04	14.12		0
	3	2	14.19	14.09	14.10		0
	3	3	14.11	14.09	14.10		0
	6	0	14.17	14.10	14.11	0-1	0
16QAM	1	0	14.16	14.10	14.16	0-1	0
	1	2	14.20	14.12	14.11		0
	1	5	14.17	14.20	14.17		0
	3	0	14.10	13.99	14.09		0
	3	2	14.12	14.07	14.03		0
	3	3	14.13	14.06	14.05		0
	6	0	14.12	14.05	14.03	0-2	0
64QAM	1	0	14.04	13.72	14.07	0-2	0
	1	2	14.11	13.71	14.08		0
	1	5	14.13	13.86	14.10		0
	3	0	14.05	13.62	13.92		0
	3	2	14.07	13.72	13.91		0
	3	3	14.11	13.67	13.92		0
	6	0	13.94	13.65	13.75		0-3

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 76 of 234

Table 8-81
LTE Band 25 (PCS) Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 2A

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	13.99	14.00	13.90	0	0
	1	50	13.86	13.85	13.80		0
	1	99	13.92	13.92	13.87		0
	50	0	13.89	13.90	13.85	0-1	0
	50	25	13.83	13.84	13.82		0
	50	50	13.87	13.82	13.81		0
	100	0	13.89	13.87	13.84		0
16QAM	1	0	13.89	13.91	13.88	0-1	0
	1	50	13.87	13.88	13.84		0
	1	99	13.88	13.92	13.80		0
	50	0	13.69	13.64	13.69	0-2	0
	50	25	13.71	13.69	13.70		0
	50	50	13.75	13.70	13.69		0
	100	0	13.78	13.75	13.80		0
64QAM	1	0	13.95	13.94	13.72	0-2	0
	1	50	13.98	13.95	13.51		0
	1	99	13.94	13.97	13.70		0
	50	0	13.91	13.82	13.60	0-3	0
	50	25	13.73	13.72	13.54		0
	50	50	13.69	13.69	13.46		0
	100	0	13.75	13.68	13.52		0

Table 8-82
LTE Band 25 (PCS) Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 2A

LTE Band 25 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26115 (1857.5 MHz)	26365 (1882.5 MHz)	26615 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	13.92	13.84	13.85	0	0
	1	36	13.91	13.81	13.75		0
	1	74	13.88	13.82	13.70		0
	36	0	13.90	13.80	13.88	0-1	0
	36	18	13.93	13.76	13.76		0
	36	37	13.87	13.78	13.75		0
	75	0	13.91	13.82	13.82		0
16QAM	1	0	13.93	13.85	13.88	0-1	0
	1	36	13.89	13.76	13.82		0
	1	74	13.85	13.82	13.85		0
	36	0	13.72	13.70	13.75	0-2	0
	36	18	13.75	13.69	13.70		0
	36	37	13.71	13.74	13.60		0
	75	0	13.73	13.65	13.62		0
64QAM	1	0	13.93	13.98	13.68	0-2	0
	1	36	13.96	13.85	13.65		0
	1	74	13.97	13.91	13.77		0
	36	0	13.74	13.65	13.55	0-3	0
	36	18	13.66	13.62	13.46		0
	36	37	13.62	13.58	13.46		0
	75	0	13.65	13.60	13.53		0

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 77 of 234

Table 8-83
LTE Band 25 (PCS) Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 2A

LTE Band 25 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	13.92	13.83	13.87	0	0
	1	25	13.87	13.82	13.79		0
	1	49	13.90	13.84	13.75		0
	25	0	13.85	13.75	13.74	0-1	0
	25	12	13.86	13.70	13.75		0
	25	25	13.88	13.77	13.74		0
	50	0	13.87	13.80	13.76		0
16QAM	1	0	13.89	13.90	13.84	0-1	0
	1	25	13.87	13.85	13.79		0
	1	49	13.88	13.88	13.80		0
	25	0	13.72	13.70	13.60	0-2	0
	25	12	13.71	13.68	13.62		0
	25	25	13.75	13.62	13.59		0
	50	0	13.69	13.64	13.58		0
64QAM	1	0	13.94	13.91	13.65	0-2	0
	1	25	13.97	13.82	13.74		0
	1	49	13.98	13.76	13.82		0
	25	0	13.74	13.62	13.55	0-3	0
	25	12	13.73	13.57	13.48		0
	25	25	13.70	13.56	13.53		0
	50	0	13.72	13.59	13.52		0

Table 8-84
LTE Band 25 (PCS) Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 2A

LTE Band 25 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	13.88	13.78	13.78	0	0
	1	12	13.89	13.82	13.77		0
	1	24	13.90	13.79	13.68		0
	12	0	13.91	13.75	13.72	0-1	0
	12	6	13.85	13.71	13.74		0
	12	13	13.85	13.76	13.68		0
	25	0	13.86	13.79	13.75		0
16QAM	1	0	13.90	13.82	13.78	0-1	0
	1	12	13.85	13.85	13.82		0
	1	24	13.88	13.88	13.79		0
	12	0	13.76	13.60	13.60	0-2	0
	12	6	13.73	13.59	13.58		0
	12	13	13.75	13.62	13.59		0
	25	0	13.72	13.63	13.57		0
64QAM	1	0	13.96	13.82	13.85	0-2	0
	1	12	13.94	13.86	13.82		0
	1	24	13.91	13.75	13.79		0
	12	0	13.80	13.80	13.65	0-3	0
	12	6	13.76	13.76	13.62		0
	12	13	13.74	13.74	13.65		0
	25	0	13.76	13.76	13.61		0

FCC ID: BCGA1934	 SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 78 of 234

Table 8-85
LTE Band 25 (PCS) Reduced Conducted Powers - 3 MHz Bandwidth- Antenna 2A

LTE Band 25 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	13.86	13.75	13.78	0	0
	1	7	13.92	13.81	13.76		0
	1	14	13.88	13.74	13.68		0
	8	0	13.90	13.73	13.81	0-1	0
	8	4	13.91	13.81	13.72		0
	8	7	13.90	13.80	13.71		0
	15	0	13.92	13.78	13.70		0
16QAM	1	0	13.85	13.80	13.73	0-1	0
	1	7	13.87	13.84	13.77		0
	1	14	13.80	13.79	13.73		0
	8	0	13.78	13.69	13.69	0-2	0
	8	4	13.81	13.65	13.62		0
	8	7	13.77	13.65	13.61		0
	15	0	13.76	13.68	13.59		0
64QAM	1	0	13.86	13.82	13.88	0-2	0
	1	7	13.90	13.83	13.85		0
	1	14	13.88	13.75	13.79		0
	8	0	13.80	13.75	13.68	0-3	0
	8	4	13.77	13.72	13.65		0
	8	7	13.79	13.69	13.67		0
	15	0	13.78	13.70	13.60		0

Table 8-86
LTE Band 25 (PCS) Reduced Conducted Powers -1.4 MHz Bandwidth- Antenna 2A

LTE Band 25 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	13.91	13.75	13.75	0	0
	1	2	13.89	13.72	13.71		0
	1	5	13.90	13.81	13.70		0
	3	0	13.88	13.75	13.69		0
	3	2	13.91	13.80	13.68		0
	3	3	13.93	13.82	13.72		0
	6	0	13.92	13.85	13.67	0-1	0
16QAM	1	0	13.90	13.79	13.77	0-1	0
	1	2	13.92	13.81	13.83		0
	1	5	13.85	13.85	13.79		0
	3	0	13.82	13.70	13.65		0
	3	2	13.86	13.70	13.69		0
	3	3	13.85	13.74	13.70		0
	6	0	13.81	13.71	13.60	0-2	0
64QAM	1	0	13.90	13.80	13.82	0-2	0
	1	2	13.88	13.78	13.78		0
	1	5	13.89	13.81	13.80		0
	3	0	13.81	13.69	13.72		0
	3	2	13.85	13.76	13.69		0
	3	3	13.86	13.72	13.65		0
	6	0	13.82	13.70	13.69	0-3	0

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 79 of 234

Table 8-87
LTE Band 25 (PCS) Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 2B

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	13.46	13.66	13.40	0	0
	1	50	13.46	13.55	13.32		0
	1	99	13.62	13.56	13.34		0
	50	0	13.40	13.57	13.42	0-1	0
	50	25	13.48	13.53	13.40		0
	50	50	13.52	13.52	13.42		0
	100	0	13.55	13.56	13.52		0
16QAM	1	0	13.36	13.63	13.33	0-1	0
	1	50	13.35	13.58	13.17		0
	1	99	13.41	13.57	13.29		0
	50	0	13.12	13.22	12.99	0-2	0
	50	25	13.09	13.16	12.98		0
	50	50	13.14	13.15	13.01		0
	100	0	13.16	13.12	13.10		0
64QAM	1	0	13.62	13.61	13.49	0-2	0
	1	50	13.40	13.48	13.46		0
	1	99	13.57	13.36	13.33		0
	50	0	13.21	13.30	13.16	0-3	0
	50	25	13.24	13.24	13.15		0
	50	50	13.29	13.26	13.20		0
	100	0	13.23	13.20	13.18		0

Table 8-88
LTE Band 25 (PCS) Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 2B

LTE Band 25 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26115 (1857.5 MHz)	26365 (1882.5 MHz)	26615 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	13.54	13.68	13.52	0	0
	1	36	13.48	13.61	13.48		0
	1	74	13.59	13.56	13.45		0
	36	0	13.44	13.55	13.46	0-1	0
	36	18	13.49	13.51	13.44		0
	36	37	13.56	13.50	13.48		0
	75	0	13.43	13.53	13.49		0
16QAM	1	0	13.41	13.52	13.41	0-1	0
	1	36	13.29	13.54	13.26		0
	1	74	13.42	13.45	13.26		0
	36	0	13.12	13.26	13.14	0-2	0
	36	18	13.17	13.23	13.12		0
	36	37	13.18	13.21	13.15		0
	75	0	13.16	13.25	13.17		0
64QAM	1	0	13.46	13.53	13.44	0-2	0
	1	36	13.40	13.42	13.34		0
	1	74	13.42	13.57	13.30		0
	36	0	13.11	13.23	13.16	0-3	0
	36	18	13.15	13.24	13.13		0
	36	37	13.19	13.21	13.14		0
	75	0	13.16	13.23	13.19		0

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 80 of 234

Table 8-89
LTE Band 25 (PCS) Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 2B

LTE Band 25 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	13.59	13.67	13.55	0	0
	1	25	13.46	13.58	13.52		0
	1	49	13.51	13.59	13.46		0
	25	0	13.47	13.59	13.47	0-1	0
	25	12	13.43	13.57	13.52		0
	25	25	13.48	13.60	13.50		0
	50	0	13.45	13.58	13.54		0
16QAM	1	0	13.47	13.61	13.47	0-1	0
	1	25	13.42	13.53	13.54		0
	1	49	13.43	13.47	13.51		0
	25	0	13.28	13.36	13.23	0-2	0
	25	12	13.25	13.32	13.29		0
	25	25	13.24	13.35	13.31		0
	50	0	13.25	13.36	13.30		0
64QAM	1	0	13.54	13.53	13.37	0-2	0
	1	25	13.27	13.41	13.48		0
	1	49	13.34	13.42	13.39		0
	25	0	13.08	13.26	13.13	0-3	0
	25	12	13.05	13.21	13.15		0
	25	25	13.10	13.18	13.11		0
	50	0	13.08	13.18	13.17		0

Table 8-90
LTE Band 25 (PCS) Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 2B

LTE Band 25 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	13.56	13.59	13.63	0	0
	1	12	13.47	13.55	13.58		0
	1	24	13.49	13.57	13.47		0
	12	0	13.54	13.57	13.54	0-1	0
	12	6	13.47	13.53	13.55		0
	12	13	13.46	13.55	13.46		0
	25	0	13.49	13.57	13.56		0
16QAM	1	0	13.46	13.57	13.54	0-1	0
	1	12	13.34	13.43	13.55		0
	1	24	13.45	13.55	13.43		0
	12	0	13.37	13.40	13.32	0-2	0
	12	6	13.29	13.36	13.33		0
	12	13	13.31	13.36	13.27		0
	25	0	13.29	13.37	13.30		0
64QAM	1	0	13.38	13.49	13.48	0-2	0
	1	12	13.27	13.38	13.47		0
	1	24	13.45	13.42	13.36		0
	12	0	13.19	13.23	13.21	0-3	0
	12	6	13.13	13.21	13.22		0
	12	13	13.10	13.22	13.07		0
	25	0	13.09	13.21	13.15		0

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 81 of 234

Table 8-91
LTE Band 25 (PCS) Reduced Conducted Powers - 3 MHz Bandwidth- Antenna 2B

LTE Band 25 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	13.49	13.53	13.54	0	0
	1	7	13.54	13.61	13.49		0
	1	14	13.43	13.52	13.40		0
	8	0	13.55	13.59	13.56	0-1	0
	8	4	13.55	13.57	13.45		0
	8	7	13.49	13.58	13.45		0
15	0	13.54	13.56	13.44	0		
16QAM	1	0	13.52	13.54	13.43	0-1	0
	1	7	13.56	13.46	13.45		0
	1	14	13.30	13.48	13.32		0
	8	0	13.39	13.35	13.37	0-2	0
	8	4	13.37	13.32	13.30		0
	8	7	13.33	13.36	13.31		0
15	0	13.38	13.35	13.29	0		
64QAM	1	0	13.55	13.51	13.43	0-2	0
	1	7	13.42	13.46	13.46		0
	1	14	13.35	13.43	13.31		0
	8	0	13.42	13.38	13.35	0-3	0
	8	4	13.34	13.33	13.23		0
	8	7	13.27	13.35	13.20		0
	15	0	13.21	13.29	13.19		0

Table 8-92
LTE Band 25 (PCS) Reduced Conducted Powers -1.4 MHz Bandwidth- Antenna 2B

LTE Band 25 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	13.54	13.58	13.47	0	0
	1	2	13.52	13.56	13.44		0
	1	5	13.57	13.57	13.43		0
	3	0	13.52	13.55	13.40		0
	3	2	13.50	13.57	13.41		0
	3	3	13.56	13.54	13.43		0
	6	0	13.52	13.57	13.46	0-1	0
16QAM	1	0	13.57	13.51	13.48	0-1	0
	1	2	13.51	13.57	13.55		0
	1	5	13.49	13.50	13.57		0
	3	0	13.37	13.44	13.33		0
	3	2	13.44	13.39	13.34		0
	3	3	13.46	13.45	13.37		0
	6	0	13.43	13.41	13.32	0-2	0
64QAM	1	0	13.62	13.61	13.70	0-2	0
	1	2	13.52	13.52	13.65		0
	1	5	13.48	13.44	13.60		0
	3	0	13.41	13.57	13.69		0
	3	2	13.47	13.37	13.50		0
	3	3	13.46	13.41	13.49		0
	6	0	13.40	13.35	13.45		0-3

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 82 of 234

8.3.6 LTE Band 30

Table 8-93
LTE Band 30 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 4A

LTE Band 30 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			27710 (2310.0 MHz) Conducted Power [dBm]		
QPSK	1	0	13.41	0	0
	1	25	13.41		0
	1	49	13.50		0
	25	0	13.39	0-1	0
	25	12	13.41		0
	25	25	13.50		0
	50	0	13.42		0
16QAM	1	0	13.25	0-1	0
	1	25	13.35		0
	1	49	13.50		0
	25	0	13.09	0-2	0
	25	12	13.16		0
	25	25	13.24		0
	50	0	13.20		0
64QAM	1	0	13.21	0-2	0
	1	25	13.41		0
	1	49	13.48		0
	25	0	13.07	0-3	0
	25	12	13.09		0
	25	25	13.17		0
	50	0	13.19		0

Table 8-94
LTE Band 30 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 4A

LTE Band 30 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			27710 (2310.0 MHz) Conducted Power [dBm]		
QPSK	1	0	13.26	0	0
	1	12	13.28		0
	1	24	13.39		0
	12	0	13.25	0-1	0
	12	6	13.25		0
	12	13	13.34		0
16QAM	25	0	13.27	0-1	0
	1	0	13.36		0
	1	12	13.41		0
	1	24	13.48	0-2	0
	12	0	13.25		0
	12	6	13.24		0
64QAM	12	13	13.31	0-2	0
	25	0	13.25		0
	1	0	13.38	0-3	0
	1	12	13.46		0
	1	24	13.50		0
	12	0	13.26		0
	12	6	13.22		0
	12	13	13.38		0
	25	0	13.30		0

Note: LTE Band 30 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 83 of 234

Table 8-95
LTE Band 30 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 4B

LTE Band 30 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			27710 (2310.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	13.09	0	0
	1	25	13.13		0
	1	49	13.20		0
	25	0	13.13	0-1	0
	25	12	13.13		0
	25	25	13.18		0
	50	0	13.15		0
16QAM	1	0	13.10	0-1	0
	1	25	13.08		0
	1	49	13.19		0
	25	0	12.87	0-2	0
	25	12	12.89		0
	25	25	12.92		0
	50	0	12.90		0
64QAM	1	0	13.08	0-2	0
	1	25	13.14		0
	1	49	13.19		0
	25	0	12.99	0-3	0
	25	12	12.95		0
	25	25	12.97		0
	50	0	12.98		0

Table 8-96
LTE Band 30 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 4B

LTE Band 30 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			27710 (2310.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	13.00	0	0
	1	12	12.98		0
	1	24	13.06		0
	12	0	12.91	0-1	0
	12	6	12.96		0
	12	13	12.99		0
	25	0	12.96		0
16QAM	1	0	13.13	0-1	0
	1	12	13.19		0
	1	24	13.17		0
	12	0	12.93	0-2	0
	12	6	13.01		0
	12	13	13.03		0
	25	0	13.01		0
64QAM	1	0	13.12	0-2	0
	1	12	13.14		0
	1	24	13.19		0
	12	0	12.78	0-3	0
	12	6	12.88		0
	12	13	12.97		0
	25	0	12.92		0

Note: LTE Band 30 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 84 of 234

Table 8-97

LTE Band 30 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 2A

LTE Band 30 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			27710 (2310.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	12.51	0	0
	1	25	12.46		0
	1	49	12.60		0
	25	0	12.47	0-1	0
	25	12	12.51		0
	25	25	12.58		0
	50	0	12.51		0
16QAM	1	0	12.50	0-1	0
	1	25	12.45		0
	1	49	12.47		0
	25	0	12.29	0-2	0
	25	12	12.28		0
	25	25	12.31		0
	50	0	12.30		0
64QAM	1	0	12.47	0-2	0
	1	25	12.44		0
	1	49	12.38		0
	25	0	12.22	0-3	0
	25	12	12.21		0
	25	25	12.25		0
	50	0	12.22		0

Table 8-98

LTE Band 30 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 2A

LTE Band 30 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			27710 (2310.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	12.46	0	0
	1	12	12.47		0
	1	24	12.45		0
	12	0	12.42	0-1	0
	12	6	12.43		0
	12	13	12.44		0
	25	0	12.45		0
16QAM	1	0	12.47	0-1	0
	1	12	12.53		0
	1	24	12.50		0
	12	0	12.35	0-2	0
	12	6	12.32		0
	12	13	12.33		0
	25	0	12.31		0
64QAM	1	0	12.39	0-2	0
	1	12	12.42		0
	1	24	12.36		0
	12	0	12.23	0-3	0
	12	6	12.23		0
	12	13	12.25		0
	25	0	12.24		0

Note: LTE Band 30 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 85 of 234

Table 8-99
LTE Band 30 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 2B

LTE Band 30 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			27710 (2310.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	12.86	0	0
	1	25	12.81		0
	1	49	12.90		0
	25	0	12.76	0-1	0
	25	12	12.77		0
	25	25	12.85		0
	50	0	12.83		0
16QAM	1	0	12.85	0-1	0
	1	25	12.79		0
	1	49	12.82		0
	25	0	12.69	0-2	0
	25	12	12.72		0
	25	25	12.70		0
	50	0	12.72		0
64QAM	1	0	12.89	0-2	0
	1	25	12.88		0
	1	49	12.85		0
	25	0	12.75	0-3	0
	25	12	12.73		0
	25	25	12.69		0
	50	0	12.78		0

Table 8-100
LTE Band 30 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 2B

LTE Band 30 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			27710 (2310.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	12.85	0	0
	1	12	12.81		0
	1	24	12.84		0
	12	0	12.80	0-1	0
	12	6	12.76		0
	12	13	12.79		0
	25	0	12.83		0
16QAM	1	0	12.84	0-1	0
	1	12	12.80		0
	1	24	12.79		0
	12	0	12.75	0-2	0
	12	6	12.72		0
	12	13	12.73		0
	25	0	12.70		0
64QAM	1	0	12.83	0-2	0
	1	12	12.82		0
	1	24	12.80		0
	12	0	12.75	0-3	0
	12	6	12.72		0
	12	13	12.79		0
	25	0	12.69		0

Note: LTE Band 30 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 86 of 234

8.3.7 LTE Band 7

Table 8-101
LTE Band 7 Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 4A

LTE Band 7 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20850 (2510.0 MHz)	21100 (2535.0 MHz)	21350 (2560.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	12.00	11.72	11.87	0	0
	1	50	11.80	11.59	11.78		0
	1	99	11.71	11.61	11.75		0
	50	0	11.91	11.68	11.86	0-1	0
	50	25	11.84	11.63	11.77		0
	50	50	11.74	11.64	11.71		0
	100	0	11.89	11.63	11.80		0
16QAM	1	0	11.92	11.81	11.59	0-1	0
	1	50	11.90	11.76	11.51		0
	1	99	11.95	11.80	11.67		0
	50	0	11.68	11.65	11.41	0-2	0
	50	25	11.80	11.61	11.38		0
	50	50	11.84	11.62	11.53		0
	100	0	11.79	11.64	11.40		0
64QAM	1	0	11.97	11.61	11.62	0-2	0
	1	50	11.83	11.58	11.55		0
	1	99	11.70	11.49	11.45		0
	50	0	11.58	11.36	11.47	0-3	0
	50	25	11.49	11.23	11.44		0
	50	50	11.47	11.30	11.42		0
	100	0	11.42	11.33	11.44		0

Table 8-102
LTE Band 7 Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 4A

LTE Band 7 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20825 (2507.5 MHz)	21100 (2535.0 MHz)	21375 (2562.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	11.89	11.79	11.59	0	0
	1	36	11.97	11.74	11.62		0
	1	74	11.98	11.69	11.68		0
	36	0	11.94	11.83	11.60	0-1	0
	36	18	11.99	11.80	11.70		0
	36	37	12.00	11.77	11.73		0
	75	0	11.96	11.82	11.69		0
16QAM	1	0	11.84	11.75	11.62	0-1	0
	1	36	11.92	11.69	11.60		0
	1	74	11.96	11.70	11.68		0
	36	0	11.70	11.64	11.43	0-2	0
	36	18	11.75	11.60	11.48		0
	36	37	11.83	11.57	11.55		0
	75	0	11.74	11.59	11.44		0
64QAM	1	0	11.98	11.44	11.75	0-2	0
	1	36	11.90	11.36	11.61		0
	1	74	11.71	11.42	11.49		0
	36	0	11.57	11.36	11.45	0-3	0
	36	18	11.63	11.25	11.44		0
	36	37	11.53	11.21	11.39		0
	75	0	11.50	11.27	11.40		0

FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 87 of 234

Table 8-103
LTE Band 7 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 4A

LTE Band 7 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20800 (2505.0 MHz)	21100 (2535.0 MHz)	21400 (2565.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	11.97	11.86	11.54	0	0
	1	25	11.95	11.77	11.60		0
	1	49	12.00	11.76	11.64		0
	25	0	11.91	11.80	11.60	0-1	0
	25	12	11.92	11.80	11.62		0
	25	25	11.94	11.84	11.64		0
	50	0	11.87	11.82	11.65		0
16QAM	1	0	11.89	11.77	11.51	0-1	0
	1	25	11.93	11.70	11.60		0
	1	49	11.99	11.64	11.63		0
	25	0	11.68	11.60	11.37	0-2	0
	25	12	11.71	11.62	11.46		0
	25	25	11.73	11.66	11.46		0
	50	0	11.68	11.64	11.49		0
64QAM	1	0	11.97	11.50	11.56	0-2	0
	1	25	11.87	11.41	11.42		0
	1	49	11.78	11.41	11.52		0
	25	0	11.76	11.34	11.38	0-3	0
	25	12	11.65	11.22	11.32		0
	25	25	11.61	11.24	11.33		0
	50	0	11.57	11.23	11.31		0

Table 8-104
LTE Band 7 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 4A

LTE Band 7 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20775 (2502.5 MHz)	21100 (2535.0 MHz)	21425 (2567.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	11.93	11.78	11.61	0	0
	1	12	11.95	11.76	11.56		0
	1	24	12.00	11.83	11.60		0
	12	0	11.90	11.78	11.58	0-1	0
	12	6	11.93	11.79	11.56		0
	12	13	12.00	11.79	11.58		0
	25	0	11.95	11.76	11.59		0
16QAM	1	0	11.87	11.68	11.55	0-1	0
	1	12	11.93	11.61	11.51		0
	1	24	11.93	11.71	11.56		0
	12	0	11.67	11.57	11.41	0-2	0
	12	6	11.76	11.58	11.38		0
	12	13	11.82	11.61	11.40		0
	25	0	11.74	11.59	11.37		0
64QAM	1	0	11.99	11.50	11.40	0-2	0
	1	12	11.97	11.44	11.47		0
	1	24	11.95	11.51	11.50		0
	12	0	11.83	11.26	11.30	0-3	0
	12	6	11.81	11.23	11.28		0
	12	13	11.84	11.27	11.34		0
	25	0	11.77	11.24	11.35		0

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 88 of 234

Table 8-105
LTE Band 7 Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 4B

LTE Band 7 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20850 (2510.0 MHz)	21100 (2535.0 MHz)	21350 (2560.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	11.93	11.84	11.98	0	0
	1	50	11.88	11.70	11.91		0
	1	99	11.92	11.63	11.95		0
	50	0	11.87	11.89	11.94	0-1	0
	50	25	11.86	11.75	11.89		0
	50	50	11.90	11.74	11.87		0
	100	0	11.86	11.82	11.87		0
16QAM	1	0	11.94	11.97	11.88	0-1	0
	1	50	11.87	11.74	11.81		0
	1	99	11.96	11.84	11.95		0
	50	0	11.74	11.74	11.70	0-2	0
	50	25	11.73	11.67	11.74		0
	50	50	11.85	11.66	11.85		0
	100	0	11.76	11.65	11.74		0
64QAM	1	0	11.94	11.97	11.88	0-2	0
	1	50	11.98	11.93	11.75		0
	1	99	11.99	11.88	11.80		0
	50	0	11.84	11.83	11.83	0-3	0
	50	25	11.72	11.69	11.72		0
	50	50	11.76	11.66	11.80		0
	100	0	11.76	11.65	11.84		0

Table 8-106
LTE Band 7 Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 4B

LTE Band 7 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20825 (2507.5 MHz)	21100 (2535.0 MHz)	21375 (2562.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	11.91	11.93	11.86	0	0
	1	36	11.89	11.82	11.90		0
	1	74	11.93	11.81	11.97		0
	36	0	11.97	11.95	11.96	0-1	0
	36	18	11.90	11.89	11.99		0
	36	37	11.93	11.87	12.00		0
	75	0	11.86	11.89	11.96		0
16QAM	1	0	11.91	11.94	11.88	0-1	0
	1	36	11.96	11.82	11.87		0
	1	74	11.97	11.77	11.93		0
	36	0	11.84	11.78	11.66	0-2	0
	36	18	11.78	11.68	11.74		0
	36	37	11.77	11.67	11.79		0
	75	0	11.74	11.66	11.75		0
64QAM	1	0	11.96	11.83	11.92	0-2	0
	1	36	11.97	11.79	11.87		0
	1	74	11.98	11.72	11.87		0
	36	0	11.81	11.71	11.67	0-3	0
	36	18	11.73	11.69	11.62		0
	36	37	11.70	11.64	11.72		0
	75	0	11.67	11.62	11.72		0

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 89 of 234

Table 8-107
LTE Band 7 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 4B

LTE Band 7 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20800 (2505.0 MHz)	21100 (2535.0 MHz)	21400 (2565.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	11.98	11.93	11.87	0	0
	1	25	11.97	11.79	11.94		0
	1	49	11.95	11.77	11.99		0
	25	0	12.00	11.84	11.97	0-1	0
	25	12	11.99	11.82	12.00		0
	25	25	11.98	11.81	11.99		0
	50	0	11.99	11.82	12.00		0
16QAM	1	0	11.98	11.84	11.82	0-1	0
	1	25	11.99	11.74	11.88		0
	1	49	11.89	11.77	11.94		0
	25	0	11.91	11.62	11.74	0-2	0
	25	12	11.80	11.60	11.80		0
	25	25	11.79	11.61	11.79		0
	50	0	11.78	11.62	11.80		0
64QAM	1	0	11.92	11.86	11.82	0-2	0
	1	25	11.99	11.68	11.86		0
	1	49	11.97	11.72	11.92		0
	25	0	11.81	11.61	11.67	0-3	0
	25	12	11.77	11.63	11.70		0
	25	25	11.80	11.61	11.69		0
	50	0	11.79	11.60	11.71		0

Table 8-108
LTE Band 7 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 4B

LTE Band 7 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20775 (2502.5 MHz)	21100 (2535.0 MHz)	21425 (2567.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	11.92	11.81	11.81	0	0
	1	12	11.96	11.85	11.79		0
	1	24	12.00	11.88	11.83		0
	12	0	11.94	11.85	11.87	0-1	0
	12	6	11.97	11.85	11.86		0
	12	13	11.98	11.87	11.88		0
	25	0	11.98	11.89	11.85		0
16QAM	1	0	11.98	11.69	11.79	0-1	0
	1	12	11.99	11.73	11.73		0
	1	24	12.00	11.80	11.80		0
	12	0	11.85	11.63	11.65	0-2	0
	12	6	11.94	11.62	11.65		0
	12	13	11.89	11.66	11.67		0
	25	0	11.89	11.64	11.68		0
64QAM	1	0	11.98	11.76	11.91	0-2	0
	1	12	11.97	11.92	11.93		0
	1	24	12.00	11.83	11.90		0
	12	0	11.91	11.68	11.65	0-3	0
	12	6	11.88	11.69	11.63		0
	12	13	11.90	11.72	11.62		0
	25	0	11.89	11.71	11.67		0

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 90 of 234

Table 8-109
LTE Band 7 Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 2A

LTE Band 7 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20850 (2510.0 MHz)	21100 (2535.0 MHz)	21350 (2560.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	11.93	11.98	12.00	0	0
	1	50	11.77	11.90	11.96		0
	1	99	11.74	11.91	11.99		0
	50	0	11.80	11.90	11.94	0-1	0
	50	25	11.81	11.89	11.99		0
	50	50	11.78	11.91	12.00		0
	100	0	11.82	11.90	11.99		0
16QAM	1	0	11.89	11.94	11.90	0-1	0
	1	50	11.85	11.91	11.89		0
	1	99	11.92	11.89	11.91		0
	50	0	11.55	11.75	11.79	0-2	0
	50	25	11.63	11.74	11.72		0
	50	50	11.73	11.73	11.82		0
	100	0	11.63	11.77	11.74		0
64QAM	1	0	11.85	11.90	11.93	0-2	0
	1	50	11.91	11.91	11.87		0
	1	99	11.93	11.94	11.95		0
	50	0	11.55	11.69	11.76	0-3	0
	50	25	11.63	11.75	11.75		0
	50	50	11.75	11.72	11.82		0
	100	0	11.69	11.78	11.72		0

Table 8-110
LTE Band 7 Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 2A

LTE Band 7 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20825 (2507.5 MHz)	21100 (2535.0 MHz)	21375 (2562.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	11.93	11.94	11.98	0	0
	1	36	11.85	11.91	11.99		0
	1	74	11.86	11.90	11.95		0
	36	0	11.70	11.85	11.78	0-1	0
	36	18	11.68	11.79	11.84		0
	36	37	11.75	11.75	11.90		0
	75	0	11.69	11.82	11.86		0
16QAM	1	0	11.91	11.88	11.92	0-1	0
	1	36	11.80	11.85	11.86		0
	1	74	11.81	11.82	11.89		0
	36	0	11.65	11.72	11.78	0-2	0
	36	18	11.62	11.78	11.75		0
	36	37	11.66	11.72	11.78		0
	75	0	11.63	11.76	11.75		0
64QAM	1	0	11.86	11.92	11.96	0-2	0
	1	36	11.69	11.94	11.89		0
	1	74	11.85	11.75	11.96		0
	36	0	11.60	11.72	11.75	0-3	0
	36	18	11.62	11.72	11.82		0
	36	37	11.67	11.70	11.82		0
	75	0	11.61	11.74	11.80		0

FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 91 of 234

Table 8-111
LTE Band 7 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 2A

LTE Band 7 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20800 (2505.0 MHz)	21100 (2535.0 MHz)	21400 (2565.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	11.93	11.97	11.98	0	0
	1	25	11.76	11.92	11.99		0
	1	49	11.88	11.87	11.95		0
	25	0	11.61	11.77	11.88	0-1	0
	25	12	11.62	11.79	11.92		0
	25	25	11.68	11.77	11.91		0
16QAM	50	0	11.63	11.78	11.94	0-1	0
	1	0	11.88	11.88	11.92		0
	1	25	11.73	11.87	11.93		0
	1	49	11.79	11.81	11.89	0-2	0
	25	0	11.56	11.79	11.82		0
	25	12	11.51	11.75	11.86		0
64QAM	25	25	11.53	11.74	11.84	0-2	0
	50	0	11.50	11.76	11.85		0
	1	0	11.86	11.86	11.99		0-2
	1	25	11.66	11.88	11.97	0	
	1	49	11.79	11.93	11.93	0-3	
	25	0	11.55	11.76	11.82		0
25	12	11.52	11.71	11.84	0		
	25	25	11.53	11.69	11.83	0-3	0
	50	0	11.50	11.75	11.84		0

Table 8-112
LTE Band 7 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 2A

LTE Band 7 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20775 (2502.5 MHz)	21100 (2535.0 MHz)	21425 (2567.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	11.91	11.91	11.99	0	0
	1	12	11.69	11.85	11.96		0
	1	24	11.66	11.81	11.98		0
	12	0	11.72	11.85	11.99	0-1	0
	12	6	11.60	11.80	11.97		0
	12	13	11.63	11.78	11.95		0
	25	0	11.62	11.79	11.98		0
16QAM	1	0	11.84	11.91	11.95	0-1	0
	1	12	11.75	11.84	11.96		0
	1	24	11.79	11.84	11.90		0
	12	0	11.65	11.75	11.86	0-2	0
	12	6	11.60	11.73	11.87		0
	12	13	11.59	11.70	11.84		0
	25	0	11.55	11.72	11.85		0
64QAM	1	0	11.85	11.92	11.98	0-2	0
	1	12	11.77	11.85	11.95		0
	1	24	11.74	11.82	11.96		0
	12	0	11.69	11.73	11.85	0-3	0
	12	6	11.55	11.73	11.83		0
	12	13	11.52	11.74	11.85		0
	25	0	11.49	11.70	11.83		0

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 92 of 234

Table 8-113
LTE Band 7 Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 2B

LTE Band 7 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20850 (2510.0 MHz)	21100 (2535.0 MHz)	21350 (2560.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	12.26	12.28	12.20	0	0
	1	50	12.18	12.10	12.01		0
	1	99	12.16	12.07	11.96		0
	50	0	12.18	12.19	12.11	0-1	0
	50	25	12.15	12.11	12.00		0
	50	50	12.15	12.05	12.02		0
	100	0	12.17	12.09	12.06		0
16QAM	1	0	12.22	12.22	12.13	0-1	0
	1	50	12.16	12.20	12.03		0
	1	99	12.12	12.15	12.06		0
	50	0	12.05	12.11	11.99	0-2	0
	50	25	12.08	12.05	12.00		0
	50	50	12.10	12.01	12.03		0
	100	0	12.05	12.07	12.00		0
64QAM	1	0	12.26	12.25	12.11	0-2	0
	1	50	12.22	12.19	12.08		0
	1	99	12.23	12.22	12.01		0
	50	0	12.19	12.10	11.95	0-3	0
	50	25	12.17	12.08	11.99		0
	50	50	12.10	12.12	12.01		0
	100	0	12.09	12.05	12.03		0

Table 8-114
LTE Band 7 Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 2B

LTE Band 7 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20825 (2507.5 MHz)	21100 (2535.0 MHz)	21375 (2562.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	12.28	12.25	12.09	0	0
	1	36	12.22	12.27	12.02		0
	1	74	12.20	12.15	11.99		0
	36	0	12.18	12.23	12.00	0-1	0
	36	18	12.16	12.18	12.02		0
	36	37	12.23	12.12	12.03		0
	75	0	12.24	12.17	12.04		0
16QAM	1	0	12.25	12.25	12.08	0-1	0
	1	36	12.20	12.18	12.05		0
	1	74	12.21	12.05	12.01		0
	36	0	12.18	12.15	12.00	0-2	0
	36	18	12.15	12.11	12.02		0
	36	37	12.20	12.02	11.99		0
	75	0	12.14	12.05	12.00		0
64QAM	1	0	12.22	12.29	12.17	0-2	0
	1	36	12.19	12.25	12.12		0
	1	74	12.20	12.21	12.13		0
	36	0	12.09	12.15	12.05	0-3	0
	36	18	12.17	12.19	12.07		0
	36	37	12.15	12.09	12.00		0
	75	0	12.10	12.07	12.03		0

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 93 of 234

Table 8-115
LTE Band 7 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 2B

LTE Band 7 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20800 (2505.0 MHz)	21100 (2535.0 MHz)	21400 (2565.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	12.29	12.22	12.03	0	0
	1	25	12.22	12.12	12.07		0
	1	49	12.19	12.09	11.98		0
	25	0	12.17	12.18	12.02	0-1	0
	25	12	12.18	12.15	12.03		0
	25	25	12.24	12.12	12.01		0
	50	0	12.18	12.15	12.05		0
16QAM	1	0	12.28	12.27	12.03	0-1	0
	1	25	12.20	12.14	12.05		0
	1	49	12.15	12.08	12.02		0
	25	0	12.12	12.07	11.99	0-2	0
	25	12	12.13	12.06	11.96		0
	25	25	12.10	12.02	11.90		0
	50	0	12.05	12.04	11.89		0
64QAM	1	0	12.25	12.27	12.05	0-2	0
	1	25	12.26	12.25	12.09		0
	1	49	12.20	12.21	12.08		0
	25	0	12.18	12.19	12.01	0-3	0
	25	12	12.22	12.15	11.99		0
	25	25	12.25	12.09	11.95		0
	50	0	12.20	12.05	11.98		0

Table 8-116
LTE Band 7 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 2B

LTE Band 7 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20775 (2502.5 MHz)	21100 (2535.0 MHz)	21425 (2567.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	12.29	12.21	12.06	0	0
	1	12	12.25	12.16	11.99		0
	1	24	12.18	12.11	12.00		0
	12	0	12.26	12.15	12.03	0-1	0
	12	6	12.24	12.14	12.01		0
	12	13	12.16	12.14	12.02		0
	25	0	12.24	12.16	12.01		0
16QAM	1	0	12.27	12.21	12.08	0-1	0
	1	12	12.21	12.20	12.02		0
	1	24	12.25	12.19	12.00		0
	12	0	12.26	12.05	11.92	0-2	0
	12	6	12.23	12.09	12.00		0
	12	13	12.22	12.05	11.91		0
	25	0	12.20	12.00	11.92		0
64QAM	1	0	12.27	12.26	12.03	0-2	0
	1	12	12.25	12.21	11.98		0
	1	24	12.20	12.23	11.97		0
	12	0	12.15	12.10	12.00	0-3	0
	12	6	12.09	12.08	12.01		0
	12	13	12.13	12.03	11.96		0
	25	0	12.05	11.99	11.90		0

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 94 of 234

8.3.8 LTE Band 41

Table 8-117
LTE Band 41 PC3 Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 4A

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.37	14.45	14.23	14.18	14.08	0	0
	1	50	14.37	14.50	14.21	14.17	14.05		0
	1	99	14.39	14.48	14.18	14.22	14.07		0
	50	0	14.29	14.32	14.11	14.14	13.99	0-1	0
	50	25	14.29	14.31	14.12	14.15	14.07		0
	50	50	14.31	14.29	14.12	14.17	14.10		0
	100	0	14.29	14.30	14.13	14.15	14.00		0
16QAM	1	0	14.49	14.41	14.25	14.27	14.09	0-1	0
	1	50	14.32	14.32	14.13	14.14	14.01		0
	1	99	14.27	14.24	13.99	14.12	13.98		0
	50	0	14.49	14.27	14.11	14.03	13.83	0-2	0
	50	25	14.23	14.22	14.07	14.05	13.85		0
	50	50	14.24	14.18	14.03	14.06	13.84		0
	100	0	14.23	14.27	14.10	14.07	13.88		0
64QAM	1	0	14.47	14.43	14.21	14.14	13.97	0-2	0
	1	50	14.38	14.29	14.20	14.10	13.89		0
	1	99	14.34	14.18	14.08	14.11	14.02		0
	50	0	14.46	14.27	14.13	14.03	13.83	0-3	0
	50	25	14.20	14.23	14.07	14.07	13.83		0
	50	50	14.25	14.19	14.05	14.04	13.84		0
	100	0	14.26	14.28	14.10	14.07	13.86		0

Table 8-118
LTE Band 41 PC3 Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 4A

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.50	14.38	14.22	14.15	13.90	0	0
	1	36	14.43	14.34	14.18	14.17	13.91		0
	1	74	14.36	14.25	14.08	14.18	13.89		0
	36	0	14.47	14.33	14.16	14.14	13.85	0-1	0
	36	18	14.38	14.32	14.15	14.16	13.88		0
	36	37	14.31	14.26	14.09	14.15	13.85		0
	75	0	14.32	14.32	14.13	14.17	13.88		0
16QAM	1	0	14.50	14.40	14.20	14.13	13.95	0-1	0
	1	36	14.44	14.42	14.18	14.21	13.90		0
	1	74	14.32	14.34	14.26	14.08	13.89		0
	36	0	14.45	14.31	14.13	14.10	13.83	0-2	0
	36	18	14.37	14.29	14.11	14.13	13.85		0
	36	37	14.29	14.24	14.06	14.14	13.83		0
	75	0	14.29	14.29	14.09	14.12	13.86		0
64QAM	1	0	14.50	14.46	14.14	14.14	13.94	0-2	0
	1	36	14.48	14.37	14.23	14.14	13.86		0
	1	74	14.35	14.35	14.15	14.05	14.00		0
	36	0	14.47	14.31	14.14	14.11	13.84	0-3	0
	36	18	14.37	14.29	14.10	14.12	13.85		0
	36	37	14.30	14.26	14.06	14.12	13.82		0
	75	0	14.31	14.30	14.11	14.14	13.88		0

FCC ID: BCGA1934	 SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device
Page 95 of 234		

Table 8-119
LTE Band 41 PC3 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 4A

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.50	14.37	14.24	14.16	13.93	0	0
	1	25	14.36	14.31	14.19	14.18	13.88		0
	1	49	14.39	14.27	14.13	14.21	13.92		0
	25	0	14.49	14.31	14.17	14.14	13.85	0-1	0
	25	12	14.38	14.29	14.14	14.13	13.84		0
	25	25	14.29	14.26	14.12	14.16	13.86		0
	50	0	14.32	14.30	14.15	14.16	13.86		0
	50	0	14.32	14.30	14.15	14.16	13.86		0
16QAM	1	0	14.50	14.38	14.24	14.22	14.02	0-1	0
	1	25	14.47	14.26	14.20	14.21	13.91		0
	1	49	14.33	14.31	14.14	14.15	13.87		0
	25	0	14.46	14.27	14.13	14.12	13.86	0-2	0
	25	12	14.34	14.29	14.09	14.11	13.84		0
	25	25	14.26	14.23	14.07	14.11	13.82		0
	50	0	14.30	14.27	14.11	14.09	13.84		0
	50	0	14.30	14.27	14.11	14.09	13.84		0
64QAM	1	0	14.49	14.42	14.19	14.23	13.94	0-2	0
	1	25	14.45	14.36	14.24	14.13	13.91		0
	1	49	14.43	14.39	14.12	14.25	13.95		0
	25	0	14.46	14.28	14.17	14.11	13.83	0-3	0
	25	12	14.36	14.27	14.10	14.10	13.81		0
	25	25	14.28	14.23	14.10	14.12	13.81		0
	50	0	14.29	14.28	14.12	14.13	13.82		0
	50	0	14.29	14.28	14.12	14.13	13.82		0

Table 8-120
LTE Band 41 PC3 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 4A

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.48	14.34	14.19	14.15	13.89	0	0
	1	12	14.37	14.31	14.16	14.14	13.89		0
	1	24	14.37	14.30	14.13	14.17	13.93		0
	12	0	14.38	14.29	14.12	14.12	13.86	0-1	0
	12	6	14.40	14.28	14.11	14.11	13.85		0
	12	13	14.34	14.26	14.08	14.17	13.86		0
	25	0	14.31	14.29	14.12	14.14	13.87		0
16QAM	1	0	14.50	14.45	14.19	14.07	13.86	0-1	0
	1	12	14.42	14.32	14.17	14.32	13.85		0
	1	24	14.40	14.33	14.05	14.10	13.90		0
	12	0	14.38	14.27	14.13	14.13	13.87	0-2	0
	12	6	14.41	14.31	14.10	14.11	13.89		0
	12	13	14.32	14.22	14.07	14.14	13.92		0
	25	0	14.31	14.31	14.10	14.09	13.83		0
64QAM	1	0	14.49	14.38	14.14	14.13	13.99	0-2	0
	1	12	14.37	14.37	14.09	14.18	13.92		0
	1	24	14.45	14.32	14.13	14.22	13.89		0
	12	0	14.37	14.26	14.08	14.10	13.88	0-3	0
	12	6	14.42	14.28	14.11	14.13	13.88		0
	12	13	14.35	14.29	14.14	14.14	13.87		0
	25	0	14.29	14.25	14.09	14.09	13.86		0

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 96 of 234

Table 8-121

LTE Band 41 PC2 Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 4A

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.38	14.44	14.42	14.23	14.03	0	0
	1	50	14.37	14.50	14.40	14.18	14.00		0
	1	99	14.43	14.47	14.35	14.23	14.00		0
	50	0	14.43	14.30	14.21	14.20	13.97	0-1	0
	50	25	14.41	14.48	14.21	14.20	13.95		0
	50	50	14.41	14.49	14.22	14.22	13.99		0
	100	0	14.42	14.48	14.23	14.22	13.99		0
16QAM	1	0	13.77	14.26	14.10	13.87	13.67	0-1	0
	1	50	14.34	14.32	14.08	13.89	13.75		0
	1	99	14.50	14.30	14.08	13.95	13.81		0
	50	0	13.96	13.97	13.85	13.66	13.51	0-2	0
	50	25	13.99	13.98	13.87	13.66	13.52		0
	50	50	14.15	14.01	13.87	13.68	13.54		0
	100	0	13.95	14.01	13.89	13.69	13.55		0
64QAM	1	0	13.94	14.50	14.34	14.19	14.11	0-2	0
	1	50	14.31	14.41	14.21	14.12	14.10		0
	1	99	14.39	14.39	14.22	14.05	14.12		0
	50	0	13.80	14.14	14.00	13.77	13.69	0-3	0
	50	25	13.83	14.07	14.04	13.71	13.68		0
	50	50	14.02	14.08	13.98	13.70	13.70		0
	100	0	13.78	14.06	14.01	13.74	13.70		0

Table 8-122

LTE Band 41 PC2 Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 4A

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.19	14.23	14.12	13.90	13.64	0	0
	1	36	14.38	14.25	14.16	13.89	13.65		0
	1	74	14.47	14.26	14.13	13.90	13.69		0
	36	0	14.26	14.20	14.06	13.83	13.58	0-1	0
	36	18	14.29	14.21	14.09	13.85	13.60		0
	36	37	14.36	14.21	14.08	13.86	13.60		0
	75	0	14.20	14.22	14.11	13.87	13.61		0
16QAM	1	0	13.78	14.35	14.11	13.90	13.72	0-1	0
	1	36	14.30	14.32	14.06	13.83	13.66		0
	1	74	14.43	14.25	14.02	13.85	13.69		0
	36	0	13.85	14.01	13.85	13.65	13.51	0-2	0
	36	18	14.03	14.01	13.86	13.65	13.50		0
	36	37	14.08	14.01	13.87	13.68	13.52		0
	75	0	14.00	14.01	13.88	13.67	13.53		0
64QAM	1	0	14.02	14.50	14.26	14.13	14.15	0-2	0
	1	36	14.28	14.43	14.31	14.13	14.13		0
	1	74	14.49	14.40	14.22	14.00	14.06		0
	36	0	13.84	14.08	13.99	13.76	13.69	0-3	0
	36	18	13.90	14.05	14.03	13.75	13.68		0
	36	37	14.02	14.04	13.97	13.70	13.71		0
	75	0	13.81	14.07	14.01	13.74	13.71		0

FCC ID: BCGA1934



SAR EVALUATION REPORT

 Approved by:
Quality Manager

Document S/N:

1C1806220015-01-R2.BCG

Test Dates:

08/13/18-09/13/18

DUT Type:

Tablet Device

Page 97 of 234

Table 8-123
LTE Band 41 PC2 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 4A

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.30	14.22	14.15	13.93	13.72	0	0
	1	25	14.28	14.19	14.18	13.89	13.69		0
	1	49	14.46	14.25	14.20	13.94	13.75		0
	25	0	14.25	14.15	14.10	13.84	13.62	0-1	0
	25	12	14.27	14.15	14.10	13.84	13.61		0
	25	25	14.30	14.16	14.11	13.87	13.64		0
	50	0	14.19	14.17	14.11	13.87	13.63		0
16QAM	1	0	14.29	14.29	14.07	13.90	13.68	0-1	0
	1	25	14.33	14.26	14.07	13.87	13.75		0
	1	49	14.44	14.30	14.13	13.91	13.78		0
	25	0	14.04	13.98	13.85	13.65	13.52	0-2	0
	25	12	14.04	13.98	13.86	13.67	13.53		0
	25	25	14.07	13.99	13.87	13.68	13.54		0
	50	0	13.97	13.99	13.86	13.67	13.53		0
64QAM	1	0	14.19	14.50	14.33	14.10	14.08	0-2	0
	1	25	14.22	14.39	14.28	14.00	14.07		0
	1	49	14.43	14.42	14.28	14.01	14.11		0
	25	0	13.91	14.07	13.96	13.70	13.61	0-3	0
	25	12	13.92	14.04	13.98	13.67	13.66		0
	25	25	13.95	14.03	13.95	13.65	13.68		0
	50	0	13.83	14.05	13.99	13.70	13.66		0

Table 8-124
LTE Band 41 PC2 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 4A

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.37	14.20	14.16	13.93	13.71	0	0
	1	12	14.29	14.19	14.16	13.92	13.68		0
	1	24	14.40	14.20	14.18	13.96	13.72		0
	12	0	14.24	14.14	14.07	13.88	13.61	0-1	0
	12	6	14.28	14.13	14.08	13.86	13.61		0
	12	13	14.29	14.14	14.09	13.87	13.64		0
	25	0	14.21	14.14	14.09	13.88	13.64		0
16QAM	1	0	14.42	14.32	14.04	13.83	13.72	0-1	0
	1	12	14.32	14.30	14.06	13.86	13.73		0
	1	24	14.38	14.28	14.07	13.89	13.74		0
	12	0	14.06	14.03	13.83	13.66	13.55	0-2	0
	12	6	14.08	14.02	13.84	13.70	13.51		0
	12	13	14.12	14.02	13.85	13.70	13.52		0
	25	0	14.00	13.99	13.84	13.68	13.52		0
64QAM	1	0	14.27	14.47	14.33	14.02	14.08	0-2	0
	1	12	14.22	14.44	14.26	14.01	14.06		0
	1	24	14.33	14.42	14.31	14.01	14.11		0
	12	0	13.93	14.13	14.01	13.72	13.72	0-3	0
	12	6	13.92	14.13	14.00	13.68	13.74		0
	12	13	13.96	14.11	14.01	13.69	13.77		0
	25	0	13.82	14.07	13.99	13.67	13.70		0

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 98 of 234

Table 8-125
LTE Band 41 PC3 Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 4B

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.89	14.96	14.82	14.80	14.73	0	0
	1	50	14.84	14.93	14.80	14.78	14.72		0
	1	99	14.91	14.91	14.83	14.82	14.76		0
	50	0	14.73	14.76	14.72	14.74	14.58	0-1	0
	50	25	14.72	14.82	14.70	14.71	14.56		0
	50	50	14.76	14.77	14.71	14.72	14.56		0
	100	0	14.75	14.81	14.73	14.75	14.59		0
16QAM	1	0	14.80	14.97	14.92	14.67	14.86	0-1	0
	1	50	14.78	14.84	14.85	14.68	14.77		0
	1	99	14.88	14.88	14.81	14.76	14.79		0
	50	0	14.53	14.53	14.55	14.42	14.45	0-2	0
	50	25	14.47	14.47	14.44	14.46	14.43		0
	50	50	14.55	14.45	14.34	14.38	14.45		0
	100	0	14.57	14.52	14.47	14.42	14.49		0
64QAM	1	0	14.77	14.96	14.91	14.64	14.77	0-2	0
	1	50	14.73	14.80	14.69	14.61	14.70		0
	1	99	14.90	14.76	14.56	14.68	14.69		0
	50	0	14.75	14.81	14.77	14.59	14.65	0-3	0
	50	25	14.71	14.69	14.66	14.58	14.63		0
	50	50	14.78	14.63	14.56	14.60	14.63		0
	100	0	14.78	14.73	14.63	14.63	14.68		0

Table 8-126
LTE Band 41 PC3 Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 4B

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.74	14.87	14.85	14.57	14.70	0	0
	1	36	14.79	14.79	14.72	14.61	14.69		0
	1	74	14.82	14.72	14.61	14.62	14.64		0
	36	0	14.70	14.74	14.74	14.55	14.62	0-1	0
	36	18	14.74	14.72	14.68	14.58	14.63		0
	36	37	14.71	14.67	14.61	14.57	14.61		0
	75	0	14.71	14.72	14.68	14.59	14.64		0
16QAM	1	0	14.79	14.94	14.89	14.69	14.81	0-1	0
	1	36	14.82	14.88	14.76	14.60	14.78		0
	1	74	14.89	14.81	14.62	14.66	14.71		0
	36	0	14.50	14.53	14.56	14.35	14.42	0-2	0
	36	18	14.55	14.48	14.46	14.38	14.42		0
	36	37	14.51	14.44	14.37	14.37	14.41		0
	75	0	14.52	14.50	14.45	14.39	14.45		0
64QAM	1	0	14.82	14.93	14.90	14.62	14.73	0-2	0
	1	36	14.71	14.85	14.73	14.67	14.78		0
	1	74	14.79	14.74	14.71	14.61	14.70		0
	36	0	14.65	14.70	14.62	14.55	14.57	0-3	0
	36	18	14.68	14.71	14.63	14.51	14.59		0
	36	37	14.66	14.63	14.55	14.50	14.57		0
	75	0	14.65	14.69	14.63	14.54	14.61		0

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 99 of 234

Table 8-127

LTE Band 41 PC3 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 4B

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.67	14.82	14.82	14.62	14.72	0	0
	1	25	14.65	14.76	14.66	14.61	14.67		0
	1	49	14.74	14.73	14.62	14.64	14.68		0
	25	0	14.61	14.66	14.66	14.57	14.62	0-1	0
	25	12	14.63	14.61	14.63	14.56	14.61		0
	25	25	14.65	14.60	14.60	14.58	14.60		0
	50	0	14.62	14.62	14.65	14.59	14.63		0
16QAM	1	0	14.86	14.93	14.85	14.65	14.81	0-1	0
	1	25	14.80	14.87	14.70	14.62	14.75		0
	1	49	14.87	14.81	14.72	14.62	14.78		0
	25	0	14.52	14.51	14.46	14.41	14.47	0-2	0
	25	12	14.54	14.50	14.43	14.34	14.44		0
	25	25	14.51	14.44	14.39	14.36	14.43		0
	50	0	14.49	14.49	14.43	14.37	14.44		0
64QAM	1	0	14.81	14.89	14.81	14.59	14.75	0-2	0
	1	25	14.72	14.78	14.70	14.51	14.72		0
	1	49	14.86	14.79	14.70	14.68	14.71		0
	25	0	14.63	14.69	14.61	14.50	14.58	0-3	0
	25	12	14.67	14.65	14.59	14.47	14.57		0
	25	25	14.65	14.62	14.53	14.49	14.56		0
	50	0	14.62	14.64	14.71	14.51	14.61		0

Table 8-128

LTE Band 41 PC3 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 4B

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.70	14.86	14.58	14.51	14.64	0	0
	1	12	14.65	14.84	14.54	14.52	14.62		0
	1	24	14.74	14.81	14.52	14.55	14.63		0
	12	0	14.65	14.57	14.53	14.47	14.58	0-1	0
	12	6	14.65	14.56	14.51	14.49	14.57		0
	12	13	14.64	14.55	14.49	14.49	14.57		0
	25	0	14.62	14.56	14.52	14.50	14.57		0
16QAM	1	0	14.89	14.91	14.69	14.73	14.89	0-1	0
	1	12	14.88	14.77	14.66	14.65	14.81		0
	1	24	14.92	14.73	14.68	14.72	14.83		0
	12	0	14.62	14.51	14.43	14.40	14.50	0-2	0
	12	6	14.56	14.45	14.39	14.37	14.48		0
	12	13	14.52	14.44	14.36	14.41	14.49		0
	25	0	14.49	14.43	14.42	14.42	14.45		0
64QAM	1	0	14.85	14.92	14.84	14.70	14.77	0-2	0
	1	12	14.76	14.79	14.72	14.74	14.81		0
	1	24	14.84	14.70	14.74	14.74	14.79		0
	12	0	14.71	14.74	14.68	14.66	14.72	0-3	0
	12	6	14.74	14.71	14.64	14.68	14.71		0
	12	13	14.79	14.68	14.67	14.65	14.72		0
	25	0	14.75	14.66	14.64	14.65	14.70		0

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 100 of 234

Table 8-129
LTE Band 41 PC2 Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 4B

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.94	14.96	14.82	14.89	14.94	0	0
	1	50	14.89	14.92	14.78	14.82	14.94		0
	1	99	14.94	14.87	14.82	14.82	14.95		0
	50	0	14.86	14.88	14.78	14.86	14.71	0-1	0
	50	25	14.79	14.91	14.77	14.80	14.67		0
	50	50	14.82	14.87	14.78	14.80	14.68		0
	100	0	14.86	14.89	14.79	14.85	14.72		0
16QAM	1	0	14.94	14.84	14.67	14.42	14.41	0-1	0
	1	50	14.92	14.80	14.59	14.40	14.46		0
	1	99	14.95	14.76	14.57	14.46	14.55		0
	50	0	14.44	14.28	14.27	14.02	14.00	0-2	0
	50	25	14.38	14.26	14.19	14.01	14.01		0
	50	50	14.45	14.28	14.20	14.02	14.02		0
	100	0	14.44	14.30	14.23	14.03	14.01		0
64QAM	1	0	14.76	14.85	14.69	14.48	14.75	0-2	0
	1		14.69	14.73	14.57	14.61	14.66		0
	1	99	14.77	14.67	14.39	14.57	14.62		0
	50	0	14.58	14.63	14.63	14.43	14.56	0-3	0
	50	25	14.52	14.57	14.48	14.42	14.52		0
	50	50	14.61	14.52	14.41	14.46	14.51		0
	100	0	14.60	14.58	14.49	14.47	14.56		0

Table 8-130
LTE Band 41 PC2 Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 4B

LTE Band 41 15 MHz Bandwidth										
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)			
			Conducted Power [dBm]							
QPSK	1	0	14.79	14.94	14.92	14.65	14.79	0	0	
	1	36	14.87	14.86	14.82	14.68	14.77		0-1	0
	1	74	14.90	14.79	14.70	14.69	14.71			0
	36	0	14.72	14.75	14.76	14.57	14.62	0		
	36	18	14.76	14.72	14.69	14.59	14.63	0		0
	36	37	14.73	14.67	14.63	14.58	14.61		0	
	75	0	14.73	14.74	14.70	14.61	14.65		0	
16QAM	1	0	14.85	14.74	14.72	14.37	14.41	0-1	0	
	1	36	14.91	14.72	14.60	14.41	14.50		0-2	0
	1	74	14.92	14.71	14.62	14.44	14.53			0
	36	0	14.42	14.27	14.28	14.01	14.00	0		
	36	18	14.46	14.28	14.22	14.01	14.02	0		0
	36	37	14.44	14.26	14.21	14.00	14.02		0	
	75	0	14.42	14.29	14.22	14.02	14.03		0	
64QAM	1	0	14.69	14.79	14.73	14.43	14.66	0-2	0	
	1	36	14.71	14.64	14.49	14.57	14.65		0-3	0
	1	74	14.78	14.65	14.41	14.57	14.64			0
	36	0	14.57	14.59	14.56	14.42	14.54	0		
	36	18	14.62	14.58	14.47	14.43	14.51	0		0
	36	37	14.63	14.49	14.41	14.45	14.52		0	
	75	0	14.59	14.58	14.49	14.45	14.55		0	

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 101 of 234

Table 8-131
LTE Band 41 PC2 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 4B

LTE Band 41 10 MHz Bandwidth										
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)			
			Conducted Power [dBm]							
QPSK	1	0	14.80	14.92	14.91	14.67	14.77	0	0	
	1	25	14.77	14.84	14.79	14.65	14.74		0-1	0
	1	49	14.85	14.81	14.73	14.70	14.74			0
	25	0	14.70	14.73	14.70	14.56	14.61	0		
	25	12	14.72	14.70	14.67	14.56	14.61	0		
	25	25	14.69	14.68	14.62	14.57	14.60	0		
	50	0	14.68	14.71	14.68	14.58	14.62	0		
16QAM	1	0	14.86	14.76	14.72	14.44	14.52	0-1	0	
	1	25	14.91	14.74	14.60	14.41	14.50		0-2	0
	1	49	14.90	14.78	14.63	14.45	14.52			0
	25	0	14.41	14.26	14.20	14.00	14.02	0		
	25	12	14.43	14.25	14.21	14.01	14.03	0		
	25	25	14.38	14.27	14.22	14.00	14.04	0		
	50	0	14.36	14.25	14.21	14.01	14.03	0		
64QAM	1	0	14.66	14.82	14.66	14.48	14.71	0-2	0	
	1	25	14.61	14.67	14.49	14.42	14.59		0-3	0
	1	49	14.76	14.64	14.48	14.60	14.61			0
	25	0	14.57	14.57	14.50	14.41	14.53	0		
	25	12	14.59	14.55	14.45	14.42	14.51	0		
	25	25	14.55	14.51	14.40	14.43	14.51	0		
	50	0	14.54	14.55	14.46	14.44	14.49	0		

Table 8-132
LTE Band 41 PC2 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 4B

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.85	14.82	14.81	14.70	14.83	0	0
	1	12	14.78	14.79	14.77	14.70	14.80		0
	1	24	14.85	14.83	14.74	14.72	14.81		0
	12	0	14.73	14.67	14.66	14.59	14.68	0-1	0
	12	6	14.75	14.66	14.65	14.60	14.67		0
	12	13	14.68	14.66	14.63	14.60	14.67		0
	25	0	14.68	14.64	14.66	14.58	14.66		0
16QAM	1	0	14.98	14.70	14.60	14.46	14.56	0-1	0
	1	12	14.85	14.64	14.52	14.43	14.54		0
	1	24	14.91	14.69	14.59	14.47	14.58		0
	12	0	14.50	14.22	14.41	14.05	14.07	0-2	0
	12	6	14.52	14.21	14.20	14.04	14.08		0
	12	13	14.46	14.23	14.21	14.05	14.08		0
	25	0	14.42	14.21	14.19	14.04	14.06		0
64QAM	1	0	14.66	14.63	14.52	14.57	14.72	0-2	0
	1	12	14.65	14.55	14.49	14.59	14.67		0
	1	24	14.67	14.56	14.53	14.56	14.65		0
	12	0	14.61	14.57	14.48	14.48	14.60	0-3	0
	12	6	14.63	14.53	14.42	14.48	14.59		0
	12	13	14.58	14.50	14.37	14.46	14.58		0
	25	0	14.53	14.51	14.40	14.45	14.55		0

FCC ID: BCGA1934	 SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device
Page 102 of 234		

Table 8-133
LTE Band 41 PC3 Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 2A

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.79	14.60	14.74	14.79	14.61	0	0
	1	50	14.69	14.64	14.72	14.73	14.59		0
	1	99	14.78	14.66	14.80	14.74	14.71		0
	50	0	14.61	14.61	14.73	14.62	14.60	0-1	0
	50	25	14.58	14.59	14.70	14.61	14.58		0
	50	50	14.64	14.60	14.71	14.63	14.60		0
	100	0	14.62	14.60	14.72	14.64	14.57		0
16QAM	1	0	14.65	14.65	14.74	14.71	14.57	0-1	0
	1	50	14.62	14.68	14.68	14.70	14.54		0
	1	99	14.70	14.57	14.69	14.65	14.50		0
	50	0	14.55	14.58	14.59	14.61	14.55	0-2	0
	50	25	14.42	14.55	14.57	14.59	14.42		0
	50	50	14.57	14.57	14.51	14.55	14.40		0
	100	0	14.50	14.59	14.60	14.50	14.41		0
64QAM	1	0	14.66	14.66	14.72	14.68	14.55	0-2	0
	1	50	14.63	14.62	14.69	14.71	14.48		0
	1	99	14.69	14.64	14.73	14.69	14.45		0
	50	0	14.59	14.54	14.68	14.60	14.43	0-3	0
	50	25	14.53	14.53	14.69	14.58	14.38		0
	50	50	14.58	14.59	14.66	14.61	14.39		0
	100	0	14.57	14.56	14.65	14.52	14.42		0

Table 8-134
LTE Band 41 PC3 Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 2A

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.55	14.58	14.75	14.69	14.41	0	0
	1	36	14.50	14.57	14.71	14.55	14.42		0
	1	74	14.65	14.58	14.62	14.39	14.39		0
	36	0	14.49	14.52	14.69	14.48	14.37	0-1	0
	36	18	14.48	14.53	14.68	14.47	14.35		0
	36	37	14.53	14.55	14.64	14.42	14.36		0
	75	0	14.49	14.58	14.68	14.50	14.38		0
16QAM	1	0	14.60	14.58	14.75	14.73	14.55	0-1	0
	1	36	14.58	14.61	14.66	14.59	14.49		0
	1	74	14.71	14.63	14.71	14.50	14.46		0
	36	0	14.45	14.53	14.70	14.48	14.42	0-2	0
	36	18	14.49	14.55	14.69	14.49	14.39		0
	36	37	14.55	14.55	14.65	14.38	14.41		0
	75	0	14.39	14.60	14.69	14.50	14.38		0
64QAM	1	0	14.62	14.60	14.77	14.67	14.45	0-2	0
	1	36	14.61	14.59	14.70	14.56	14.42		0
	1	74	14.69	14.65	14.68	14.49	14.52		0
	36	0	14.51	14.51	14.65	14.49	14.39	0-3	0
	36	18	14.49	14.54	14.62	14.46	14.41		0
	36	37	14.57	14.56	14.68	14.45	14.36		0
	75	0	14.42	14.59	14.70	14.50	14.37		0

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 103 of 234

Table 8-135
LTE Band 41 PC3 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 2A

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.60	14.62	14.74	14.58	14.47	0	0
	1	25	14.49	14.57	14.68	14.50	14.45		0
	1	49	14.62	14.59	14.65	14.48	14.42		0
	25	0	14.48	14.50	14.65	14.45	14.41	0-1	0
	25	12	14.47	14.48	14.63	14.43	14.35		0
	25	25	14.50	14.52	14.62	14.41	14.36		0
	50	0	14.40	14.53	14.65	14.46	14.33		0
16QAM	1	0	14.60	14.65	14.69	14.61	14.55	0-1	0
	1	25	14.55	14.60	14.67	14.58	14.49		0
	1	49	14.69	14.64	14.62	14.55	14.45		0
	25	0	14.52	14.59	14.66	14.52	14.41	0-2	0
	25	12	14.49	14.52	14.65	14.50	14.39		0
	25	25	14.52	14.54	14.60	14.47	14.35		0
	50	0	14.42	14.53	14.63	14.49	14.37		0
64QAM	1	0	14.63	14.59	14.75	14.60	14.45	0-2	0
	1	25	14.50	14.64	14.72	14.58	14.49		0
	1	49	14.66	14.63	14.68	14.49	14.50		0
	25	0	14.47	14.50	14.65	14.46	14.42	0-3	0
	25	12	14.43	14.49	14.64	14.45	14.38		0
	25	25	14.49	14.51	14.62	14.44	14.35		0
	50	0	14.40	14.53	14.60	14.48	14.37		0

Table 8-136
LTE Band 41 PC3 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 2A

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.56	14.60	14.70	14.55	14.48	0	0
	1	12	14.50	14.58	14.67	14.56	14.45		0
	1	24	14.58	14.57	14.65	14.52	14.38		0
	12	0	14.45	14.55	14.66	14.50	14.39	0-1	0
	12	6	14.47	14.52	14.64	14.49	14.35		0
	12	13	14.50	14.53	14.63	14.48	14.34		0
	25	0	14.42	14.49	14.65	14.44	14.35		0
16QAM	1	0	14.62	14.68	14.71	14.60	14.52	0-1	0
	1	12	14.55	14.60	14.68	14.53	14.49		0
	1	24	14.59	14.64	14.66	14.55	14.42		0
	12	0	14.48	14.57	14.68	14.49	14.44	0-2	0
	12	6	14.52	14.56	14.60	14.49	14.39		0
	12	13	14.49	14.51	14.62	14.46	14.38		0
	25	0	14.43	14.55	14.67	14.51	14.41		0
64QAM	1	0	14.55	14.55	14.69	14.59	14.50	0-2	0
	1	12	14.52	14.60	14.65	14.61	14.54		0
	1	24	14.58	14.66	14.59	14.59	14.49		0
	12	0	14.48	14.54	14.64	14.49	14.45	0-3	0
	12	6	14.52	14.55	14.68	14.51	14.41		0
	12	13	14.50	14.56	14.64	14.47	14.38		0
	25	0	14.41	14.51	14.65	14.49	14.35		0

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 104 of 234

Table 8-137

LTE Band 41 PC2 Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 2A

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.73	14.78	14.78	14.63	14.32	0	0
	1	50	14.76	14.73	14.76	14.58	14.29		0
	1	99	14.79	14.74	14.80	14.57	14.33		0
	50	0	14.61	14.56	14.77	14.64	14.34	0-1	0
	50	25	14.58	14.56	14.79	14.59	14.36		0
	50	50	14.65	14.60	14.75	14.56	14.35		0
	100	0	14.51	14.59	14.78	14.64	14.36		0
16QAM	1	0	14.75	14.68	14.72	14.62	14.55	0-1	0
	1	50	14.73	14.65	14.68	14.55	14.62		0
	1	99	14.71	14.72	14.65	14.47	14.50		0
	50	0	14.46	14.50	14.50	14.60	14.35	0-2	0
	50	25	14.39	14.37	14.41	14.55	14.39		0
	50	50	14.43	14.42	14.42	14.52	14.30		0
	100	0	14.35	14.43	14.39	14.58	14.34		0
64QAM	1	0	14.70	14.69	14.75	14.66	14.50	0-2	0
	1	50	14.65	14.64	14.70	14.60	14.49		0
	1	99	14.67	14.71	14.67	14.62	14.60		0
	50	0	14.39	14.41	14.45	14.36	14.38	0-3	0
	50	25	14.35	14.39	14.44	14.41	14.35		0
	50	50	14.44	14.39	14.43	14.39	14.37		0
	100	0	14.33	14.40	14.46	14.33	14.35		0

Table 8-138

LTE Band 41 PC2 Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 2A

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.70	14.75	14.70	14.55	14.38	0	0
	1	36	14.69	14.70	14.65	14.50	14.35		0
	1	74	14.72	14.68	14.68	14.47	14.37		0
	36	0	14.52	14.55	14.58	14.42	14.37	0-1	0
	36	18	14.55	14.50	14.47	14.31	14.39		0
	36	37	14.58	14.59	14.53	14.39	14.34		0
	75	0	14.45	14.50	14.47	14.35	14.35		0
16QAM	1	0	14.69	14.67	14.69	14.62	14.55	0-1	0
	1	36	14.59	14.70	14.72	14.59	14.59		0
	1	74	14.65	14.67	14.65	14.61	14.53		0
	36	0	14.39	14.38	14.45	14.38	14.38	0-2	0
	36	18	14.38	14.39	14.45	14.40	14.37		0
	36	37	14.38	14.41	14.42	14.39	14.33		0
	75	0	14.32	14.39	14.46	14.35	14.32		0
64QAM	1	0	14.70	14.63	14.70	14.61	14.59	0-2	0
	1	36	14.63	14.65	14.69	14.56	14.60		0
	1	74	14.69	14.70	14.68	14.55	14.59		0
	36	0	14.36	14.38	14.44	14.41	14.38	0-3	0
	36	18	14.38	14.38	14.38	14.33	14.39		0
	36	37	14.35	14.37	14.35	14.38	14.37		0
	75	0	14.35	14.39	14.35	14.33	14.33		0

FCC ID: BCGA1934



SAR EVALUATION REPORT

Approved by:
Quality Manager

Document S/N:

1C1806220015-01-R2.BCG

Test Dates:

08/13/18-09/13/18

DUT Type:

Tablet Device

Page 105 of 234

Table 8-139
LTE Band 41 PC2 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 2A

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.73	14.68	14.67	14.53	14.38	0	0
	1	25	14.75	14.65	14.62	14.49	14.35		0
	1	49	14.69	14.60	14.60	14.51	14.30		0
	25	0	14.51	14.38	14.46	14.39	14.36	0-1	0
	25	12	14.55	14.39	14.50	14.32	14.30		0
	25	25	14.48	14.35	14.51	14.35	14.32		0
	50	0	14.44	14.37	14.45	14.30	14.30		0
16QAM	1	0	14.73	14.60	14.75	14.53	14.50	0-1	0
	1	25	14.62	14.61	14.64	14.49	14.47		0
	1	49	14.65	14.55	14.63	14.45	14.55		0
	25	0	14.35	14.37	14.38	14.35	14.35	0-2	0
	25	12	14.33	14.34	14.39	14.37	14.39		0
	25	25	14.31	14.36	14.33	14.34	14.29		0
	50	0	14.33	14.34	14.34	14.31	14.34		0
64QAM	1	0	14.66	14.68	14.74	14.56	14.58	0-2	0
	1	25	14.58	14.68	14.70	14.52	14.52		0
	1	49	14.70	14.73	14.65	14.53	14.55		0
	25	0	14.38	14.37	14.41	14.32	14.36	0-3	0
	25	12	14.37	14.35	14.35	14.35	14.37		0
	25	25	14.37	14.36	14.33	14.30	14.33		0
	50	0	14.35	14.38	14.36	14.30	14.30		0

Table 8-140
LTE Band 41 PC2 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 2A

LTE Band 41 5 MHz Bandwidth										
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)			
			Conducted Power [dBm]							
QPSK	1	0	14.64	14.64	14.60	14.49	14.40	0	0	
	1	12	14.60	14.60	14.59	14.45	14.38		0-1	0
	1	24	14.61	14.59	14.55	14.47	14.37			0
	12	0	14.40	14.45	14.35	14.32	14.35	0		
	12	6	14.42	14.42	14.38	14.35	14.30	0		
	12	13	14.45	14.40	14.39	14.38	14.32	0		
	25	0	14.38	14.38	14.30	14.30	14.35	0		
16QAM	1	0	14.75	14.61	14.69	14.55	14.55	0-1	0	
	1	12	14.65	14.55	14.70	14.47	14.47		0-2	0
	1	24	14.72	14.59	14.60	14.56	14.53			0
	12	0	14.39	14.42	14.39	14.42	14.39	0		
	12	6	14.38	14.38	14.36	14.39	14.35	0		
	12	13	14.41	14.37	14.38	14.36	14.36	0		
	25	0	14.34	14.36	14.39	14.33	14.35	0		
64QAM	1	0	14.73	14.60	14.72	14.57	14.60	0-2	0	
	1	12	14.65	14.62	14.66	14.59	14.58		0-3	0
	1	24	14.70	14.65	14.63	14.57	14.52			0
	12	0	14.39	14.40	14.39	14.36	14.37	0		
	12	6	14.38	14.39	14.37	14.34	14.38	0		
	12	13	14.36	14.37	14.35	14.36	14.31	0		
	25	0	14.36	14.33	14.36	14.31	14.30	0		

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 106 of 234

Table 8-141

LTE Band 41 PC3 Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 2B

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.38	14.45	14.26	14.46	14.35	0	0
	1	50	14.47	14.42	14.32	14.45	14.38		0
	1	99	14.46	14.43	14.36	14.48	14.47		0
	50	0	14.35	14.33	14.33	14.42	14.29	0-1	0
	50	25	14.43	14.31	14.34	14.41	14.27		0
	50	50	14.43	14.32	14.37	14.47	14.33		0
	100	0	14.45	14.36	14.40	14.46	14.32		0
16QAM	1	0	14.40	14.32	14.21	14.31	14.23	0-1	0
	1	50	14.38	14.28	14.24	14.29	14.26		0
	1	99	14.42	14.27	14.31	14.32	14.30		0
	50	0	14.01	14.00	14.00	14.07	13.92	0-2	0
	50	25	14.13	13.97	14.01	14.06	13.94		0
	50	50	14.18	13.97	14.04	14.08	13.97		0
	100	0	14.19	14.02	14.05	14.11	13.99		0
64QAM	1	0	14.29	14.26	14.03	14.41	14.24	0-2	0
	1	50	14.37	14.30	14.04	14.33	14.35		0
	1	99	14.48	14.12	14.07	14.24	14.34		0
	50	0	14.01	14.07	14.08	14.20	14.18	0-3	0
	50	25	14.11	14.07	14.01	14.14	14.03		0
	50	50	14.19	14.10	14.02	14.12	14.07		0
	100	0	14.25	14.11	14.07	14.13	14.10		0

Table 8-142

LTE Band 41 PC3 Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 2B

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.34	14.29	14.28	14.37	14.23	0	0
	1	36	14.38	14.28	14.34	14.38	14.27		0
	1	74	14.49	14.27	14.35	14.39	14.30		0
	36	0	14.32	14.27	14.31	14.37	14.22	0-1	0
	36	18	14.37	14.27	14.34	14.38	14.23		0
	36	37	14.45	14.25	14.35	14.39	14.24		0
	75	0	14.42	14.29	14.36	14.38	14.25		0
16QAM	1	0	14.31	14.27	14.15	14.25	14.19	0-1	0
	1	36	14.33	14.23	14.25	14.27	14.21		0
	1	74	14.42	14.18	14.27	14.28	14.26		0
	36	0	13.96	13.94	13.95	14.05	13.88	0-2	0
	36	18	14.01	13.94	13.99	14.02	13.91		0
	36	37	14.11	13.93	13.98	14.01	13.93		0
	75	0	14.11	13.95	13.99	14.03	13.93		0
64QAM	1	0	14.28	14.25	14.05	14.08	14.09	0-2	0
	1	36	14.37	14.31	14.20	14.11	14.20		0
	1	74	14.46	14.23	14.13	14.15	14.26		0
	36	0	14.08	14.05	14.12	14.11	14.11	0-3	0
	36	18	14.04	14.03	14.06	14.05	14.01		0
	36	37	14.16	14.04	14.09	14.08	14.05		0
	75	0	14.22	14.04	14.10	14.11	14.06		0

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 107 of 234

Table 8-143

LTE Band 41 PC3 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 2B

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.39	14.25	14.29	14.37	14.19	0	0
	1	25	14.42	14.22	14.30	14.32	14.19		0
	1	49	14.49	14.24	14.33	14.38	14.25		0
	25	0	14.29	14.20	14.29	14.33	14.14	0-1	0
	25	12	14.30	14.19	14.28	14.32	14.14		0
	25	25	14.42	14.19	14.30	14.34	14.15		0
	50	0	14.42	14.21	14.31	14.34	14.18		0
16QAM	1	0	14.30	14.26	14.25	14.33	14.19	0-1	0
	1	25	14.38	14.21	14.25	14.30	14.20		0
	1	49	14.47	14.23	14.27	14.38	14.30		0
	25	0	14.00	13.96	13.98	14.04	13.89	0-2	0
	25	12	14.03	13.94	13.99	14.02	13.90		0
	25	25	14.12	13.95	13.99	14.04	13.92		0
	50	0	14.11	13.96	14.00	14.05	13.92		0
64QAM	1	0	14.24	14.34	14.14	14.15	14.19	0-2	0
	1	25	14.37	14.28	14.22	14.10	14.21		0
	1	49	14.47	14.23	14.16	14.13	14.42		0
	25	0	14.17	14.04	14.07	14.11	14.06	0-3	0
	25	12	14.10	14.03	14.07	14.07	14.01		0
	25	25	14.21	14.05	14.10	14.10	14.03		0
	50	0	14.23	14.05	14.09	14.11	14.05		0

Table 8-144

LTE Band 41 PC3 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 2B

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.35	14.21	14.27	14.36	14.21	0	0
	1	12	14.41	14.19	14.28	14.34	14.20		0
	1	24	14.45	14.20	14.31	14.38	14.23		0
	12	0	14.33	14.18	14.27	14.34	14.16	0-1	0
	12	6	14.34	14.17	14.27	14.33	14.18		0
	12	13	14.42	14.18	14.26	14.35	14.17		0
	25	0	14.41	14.17	14.28	14.24	14.17		0
16QAM	1	0	14.35	14.24	14.23	14.32	14.26	0-1	0
	1	12	14.40	14.23	14.24	14.30	14.23		0
	1	24	14.43	14.19	14.25	14.31	14.28		0
	12	0	14.07	13.94	13.99	14.06	13.93	0-2	0
	12	6	14.06	13.93	13.98	14.07	13.94		0
	12	13	14.15	13.94	13.99	14.08	13.94		0
	25	0	14.12	13.91	13.97	14.06	13.92		0
64QAM	1	0	14.33	14.30	14.18	14.24	14.22	0-2	0
	1	12	14.44	14.25	14.18	14.34	14.27		0
	1	24	14.46	14.22	14.26	14.26	14.38		0
	12	0	14.14	14.04	14.09	14.16	14.03	0-3	0
	12	6	14.11	13.99	14.07	14.14	14.03		0
	12	13	14.18	13.98	14.10	14.14	14.05		0
	25	0	14.22	14.03	14.07	14.13	14.09		0

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 108 of 234

Table 8-145
LTE Band 41 PC2 Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 2B

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.40	14.46	14.35	14.49	14.33	0	0
	1	50	14.37	14.48	14.37	14.39	14.34		0
	1	99	14.36	14.47	14.42	14.40	14.35		0
	50	0	14.39	14.33	14.40	14.48	14.13	0-1	0
	50	25	14.42	14.33	14.42	14.40	14.12		0
	50	50	14.43	14.32	14.43	14.39	14.14		0
	100	0	14.44	14.36	14.43	14.45	14.16		0
16QAM	1	0	14.46	14.36	14.31	14.43	14.25	0-1	0
	1	50	14.37	14.38	14.35	14.33	14.27		0
	1	99	14.34	14.35	14.36	14.44	14.29		0
	50	0	13.90	13.89	13.91	14.02	13.80	0-2	0
	50	25	13.91	13.88	13.93	13.96	13.80		0
	50	50	13.95	13.90	13.95	13.98	13.82		0
	100	0	13.97	13.91	13.96	13.99	13.84		0
64QAM	1	0	14.31	14.18	14.18	14.30	14.18	0-2	0
	1	50	14.22	14.19	14.20	14.25	14.21		0
	1	99	14.21	14.21	14.25	14.33	14.24		0
	50	0	13.91	13.85	13.92	14.03	13.80	0-3	0
	50	25	13.92	13.89	13.93	13.95	13.81		0
	50	50	13.96	13.90	13.95	13.98	13.83		0
	100	0	13.99	13.91	13.96	13.99	13.83		0

Table 8-146
LTE Band 41 PC2 Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 2B

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.37	14.30	14.28	14.37	14.23	0	0
	1	36	14.40	14.29	14.35	14.38	14.27		0
	1	74	14.50	14.26	14.34	14.37	14.30		0
	36	0	14.30	14.24	14.27	14.32	14.18	0-1	0
	36	18	14.34	14.23	14.30	14.33	14.20		0
	36	37	14.42	14.21	14.32	14.33	14.18		0
	75	0	14.43	14.25	14.32	14.35	14.23		0
16QAM	1	0	14.42	14.29	14.31	14.41	14.25	0-1	0
	1	36	14.36	14.36	14.38	14.39	14.26		0
	1	74	14.38	14.32	14.35	14.43	14.27		0
	36	0	13.88	13.82	13.91	14.01	13.80	0-2	0
	36	18	13.91	13.89	13.93	13.98	13.81		0
	36	37	13.90	13.88	13.92	13.99	13.82		0
	75	0	13.94	13.89	13.93	13.99	13.82		0
64QAM	1	0	14.26	14.11	14.14	14.31	14.04	0-2	0
	1	36	14.22	14.17	14.20	14.26	14.10		0
	1	74	14.25	14.18	14.19	14.30	14.11		0
	36	0	13.91	13.84	13.90	14.04	13.80	0-3	0
	36	18	13.93	13.90	13.93	13.99	13.83		0
	36	37	13.94	13.89	13.92	14.00	13.84		0
	75	0	13.93	13.89	13.93	13.99	13.84		0

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 109 of 234

Table 8-147

LTE Band 41 PC2 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 2B

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.32	14.23	14.35	14.44	14.19	0	0
	1	25	14.31	14.27	14.36	14.34	14.20		0
	1	49	14.36	14.30	14.38	14.40	14.25		0
	25	0	14.24	14.14	14.30	14.37	14.14	0-1	0
	25	12	14.25	14.20	14.31	14.31	14.12		0
	25	25	14.26	14.21	14.32	14.32	14.15		0
	50	0	14.28	14.22	14.32	14.33	14.14		0
16QAM	1	0	14.37	14.32	14.31	14.44	14.23	0-1	0
	1	25	14.39	14.36	14.36	14.37	14.26		0
	1	49	14.42	14.34	14.33	14.40	14.31		0
	25	0	13.90	13.83	13.93	14.03	13.79	0-2	0
	25	12	13.91	13.86	13.92	13.95	13.78		0
	25	25	13.92	13.88	13.92	13.97	13.80		0
	50	0	13.91	13.89	13.93	13.95	13.79		0
64QAM	1	0	14.20	14.13	14.21	14.31	14.08	0-2	0
	1	25	14.21	14.16	14.20	14.23	14.09		0
	1	49	14.26	14.20	14.22	14.24	14.11		0
	25	0	13.89	13.82	13.92	14.01	13.79	0-3	0
	25	12	13.90	13.87	13.91	13.94	13.78		0
	25	25	13.92	13.88	13.93	13.97	13.79		0
	50	0	13.93	13.89	13.94	13.97	13.80		0

Table 8-148

LTE Band 41 PC2 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 2B

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.39	14.24	14.37	14.44	14.25	0	0
	1	12	14.37	14.29	14.37	14.35	14.26		0
	1	24	14.38	14.31	14.38	14.38	14.27		0
	12	0	14.31	14.22	14.29	14.37	14.17	0-1	0
	12	6	14.30	14.22	14.30	14.30	14.18		0
	12	13	14.31	14.23	14.32	14.31	14.19		0
	25	0	14.31	14.23	14.31	14.32	14.16		0
16QAM	1	0	14.42	14.32	14.33	14.42	14.27	0-1	0
	1	12	14.39	14.34	14.34	14.33	14.31		0
	1	24	14.35	14.38	14.33	14.35	14.28		0
	12	0	13.95	13.91	13.93	14.05	13.86	0-2	0
	12	6	13.96	13.90	13.94	13.99	13.85		0
	12	13	13.98	13.91	13.95	14.00	13.87		0
	25	0	13.91	13.87	13.91	13.97	13.84		0
64QAM	1	0	14.23	14.12	14.19	14.31	14.14	0-2	0
	1	12	14.21	14.16	14.20	14.24	14.13		0
	1	24	14.22	14.17	14.19	14.26	14.14		0
	12	0	13.95	13.91	13.95	14.06	13.87	0-3	0
	12	6	13.94	13.91	13.95	13.99	13.87		0
	12	13	13.96	13.92	13.94	14.00	13.89		0
	25	0	13.92	13.87	13.90	13.97	13.83		0

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 110 of 234

8.3.9 LTE Uplink Carrier Aggregation Conducted Powers

Table 8-149

LTE Uplink Carrier Aggregation Reduced Conducted Powers – Antenna 4A

	PCC									SCC									Power	
Combination	PCC Band	PCC Bandwidth [MHz]	PCC UL Channel	PCC UL Frequency [MHz]	PCC DL Channel	PCC DL Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC UL Channel	SCC UL Frequency [MHz]	SCC DL Channel	SCC DL Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_7C (1)	LTE B7	20	21100	2535.0	3100	2655.0	QPSK	50	0	LTE B7	20	20902	2515.2	2902	2635.2	QPSK	50	50	11.89	11.68
	PCC									SCC									Power	
Combination	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)				
CA_41C (1)	LTE B41	20	40185	2549.5	QPSK	50	0	LTE B41	20	39987	2529.7	QPSK	50	50	14.08	14.32				

Table 8-150

LTE Uplink Carrier Aggregation Reduced Conducted Powers – Antenna 4B

	PCC									SCC									Power	
Combination	PCC Band	PCC Bandwidth [MHz]	PCC UL Channel	PCC UL Frequency [MHz]	PCC DL Channel	PCC DL Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC UL Channel	SCC UL Frequency [MHz]	SCC DL Channel	SCC DL Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_7C (1)	LTE B7	20	21350	2560.0	3350	2680.0	QPSK	50	0	LTE B7	20	21152	2540.2	3152	2660.2	QPSK	50	50	12.00	11.94
	PCC									SCC									Power	
Combination	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)				
CA_41C (1)	LTE B41	20	40620	2593.0	QPSK	50	0	LTE B41	20	40422	2573.2	QPSK	50	50	14.70	14.72				

Table 8-151

LTE Uplink Carrier Aggregation Reduced Conducted Powers – Antenna 2A

	PCC									SCC								Power		LTE Single Carrier Tx Power (dBm)
Combination	PCC Band	PCC Bandwidth [MHz]	PCC UL Channel	PCC UL Frequency [MHz]	PCC DL Channel	PCC DL Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC UL Channel	SCC UL Frequency [MHz]	SCC DL Channel	SCC DL Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_7C (1)	LTE B7	20	21350	2560.0	3350	2680.0	QPSK	1	0	LTE B7	20	21152	2540.2	3152	2660.2	QPSK	1	99	12.00	12.00
	PCC									SCC								Power		LTE Single Carrier Tx Power (dBm)
Combination	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)				
CA_41C (1)	LTE B41	20	40620	2593.0	QPSK	50	0	LTE B41	20	40422	2573.2	QPSK	50	50	14.76	14.73				

Table 8-152

LTE Uplink Carrier Aggregation Reduced Conducted Powers – Antenna 2B

	PCC									SCC									Power		
Combination	PCC Band	PCC Bandwidth [MHz]	PCC UL Channel	PCC UL Frequency [MHz]	PCC DL Channel	PCC DL Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC UL Channel	SCC UL Frequency [MHz]	SCC DL Channel	SCC DL Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)	
CA_7C (1)	LTE B7	20	21100	2535.0	3100	2655.0	QPSK	1	0	LTE B7	20	20902	2515.2	2902	2635.2	QPSK	1	99	12.27	12.28	
	PCC									SCC									Power		
Combination	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)					
CA_41C (1)	LTE B41	20	40185	2549.5	QPSK	1	0	LTE B41	20	39987	2529.7	QPSK	1	99	14.07	14.45					

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 111 of 234

Notes:

1. This device supports uplink carrier aggregation for LTE CA_7C(1) and LTE CA_41C(1) with a maximum of two 20 MHz component carriers. For intraband contiguous carrier aggregation scenarios, 3GPP 36.101 Table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when non-contiguous RB allocation is implemented. The conducted powers and MPR settings in this device are permanently implemented per the above 3GPP requirements.
2. Per FCC Guidance, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.
3. Uplink carrier aggregation is only possible when the device is operating with Power Class 3 for LTE Band 41.




Figure 8-3
Power Measurement Setup

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 112 of 234

8.4 WLAN Maximum Conducted Powers

8.4.1 Variant 1

Table 8-153
2.4 GHz WLAN Average RF Power – Ant 4A

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	13.50	13.70	13.70
2437	6	13.58	13.61	13.69
2462	11	13.62	13.63	13.68

Table 8-154
2.4 GHz WLAN Average RF Power – Ant 2A

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	13.65	11.98	12.00
2417	2	N/A	13.71	13.70
2437	6	13.75	13.75	13.75
2457	10	N/A	13.71	13.71
2462	11	13.56	12.00	11.96

Table 8-155
2.4 GHz WLAN Average RF Power – Ant 5

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	17.90	17.48	17.42
2417	2	N/A	18.92	18.89
2437	6	17.86	18.95	18.96
2462	11	17.89	19.00	18.92

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 113 of 234

Table 8-156
5 GHz WLAN Average RF Power – Ant 5

5GHz (40MHz) Conducted Power [dBm]			5GHz (80MHz) Conducted Power [dBm]		
Freq [MHz]	Channel	IEEE Transmission Mode	Freq [MHz]	Channel	IEEE Transmission Mode
		802.11n			802.11ac
		Average			Average
5190	38	13.94	5530	106	13.41
5230	46	15.35	5610	122	15.42
5270	54	17.00	5690	138	15.41
5310	62	13.94	5775	155	15.94

Table 8-157
5 GHz WLAN Average RF Power – Ant 6

5GHz (80MHz) Conducted Power [dBm]			5GHz (40MHz) Conducted Power [dBm]		
Freq [MHz]	Channel	IEEE Transmission Mode	Freq [MHz]	Channel	IEEE Transmission Mode
		802.11ac			802.11n
		Average			Average
5530	106	13.50	5190	38	13.89
5610	122	15.46	5230	46	16.94
5690	138	15.42	5270	54	16.96
5775	155	15.00	5310	62	13.97

8.4.2 Variant 2

Table 8-158
2.4 GHz WLAN Average RF Power – Ant 4A

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	13.72	13.50	13.60
2437	6	13.58	13.70	13.68
2462	11	13.59	13.70	13.70

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 114 of 234

Table 8-159
2.4 GHz WLAN Average RF Power – Ant 2A

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	13.57	12.00	12.00
2417	2	N/A	13.62	13.75
2437	6	13.71	13.66	13.70
2457	10	N/A	13.75	13.60
2462	11	13.70	11.89	12.00

Table 8-160
2.4 GHz WLAN Average RF Power – Ant 5

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	17.99	17.30	17.30
2417	2	N/A	18.60	18.10
2437	6	17.92	17.90	18.47
2462	11	17.89	17.85	17.90

Table 8-161
5 GHz WLAN Average RF Power – Ant 5

5GHz (40MHz) Conducted Power [dBm]			5GHz (80MHz) Conducted Power [dBm]		
Freq [MHz]	Channel	IEEE Transmission Mode	Freq [MHz]	Channel	IEEE Transmission Mode
		802.11n			802.11ac
		Average			Average
5190	38	13.96	5530	106	13.29
5230	46	15.42	5610	122	15.47
5270	54	16.89	5690	138	15.45
5310	62	13.87	5775	155	15.83

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 115 of 234

Table 8-162
5 GHz WLAN Average RF Power – Ant 6

5GHz (40MHz) Conducted Power [dBm]			5GHz (80MHz) Conducted Power [dBm]		
Freq [MHz]	Channel	IEEE Transmission Mode	Freq [MHz]	Channel	IEEE Transmission Mode
		802.11n			802.11ac
		Average			Average
5190	38	14.00	5530	106	13.40
5230	46	16.92	5610	122	15.43
5270	54	16.93	5690	138	15.49
5310	62	13.75	5775	155	15.00

8.5 WLAN Reduced Conducted Powers

8.5.1 Variant 1

Table 8-163
2.4 GHz WLAN Average RF Power – Ant 4A

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	6.73	6.70	6.70
2437	6	6.69	6.60	6.75
2462	11	6.74	6.70	6.70

Table 8-164
2.4 GHz WLAN Average RF Power – Ant 2A

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	6.74	6.75	6.75
2437	6	6.65	6.75	6.75
2462	11	6.60	6.60	6.75

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 116 of 234

Table 8-165
2.4 GHz WLAN Average RF Power – Ant 5

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	14.47	15.50	15.40
2437	6	14.39	15.50	15.50
2462	11	14.45	15.40	15.50

Table 8-166
5 GHz WLAN Average RF Power – Ant 5

5GHz (80MHz) Conducted Power [dBm]		
Freq [MHz]	Channel	IEEE Transmission Mode
		802.11ac
		Average
5210	42	8.50
5290	58	10.00
5530	106	8.44
5610	122	8.47
5690	138	8.50
5775	155	9.00

Table 8-167
5 GHz WLAN Average RF Power – Ant 6

5GHz (80MHz) Conducted Power [dBm]		
Freq [MHz]	Channel	IEEE Transmission Mode
		802.11ac
		Average
5210	42	11.99
5290	58	12.00
5530	106	10.45
5610	122	10.49
5690	138	10.50
5775	155	9.90

FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 117 of 234

8.5.2

Variant 2

Table 8-168
2.4 GHz WLAN Average RF Power – Ant 4A

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	6.60	6.50	6.75
2437	6	6.75	6.60	6.75
2462	11	6.66	6.60	6.60

Table 8-169
2.4 GHz WLAN Average RF Power – Ant 2A

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	6.61	6.70	6.75
2437	6	6.75	6.75	6.75
2462	11	6.67	6.70	6.75

Table 8-170
2.4 GHz WLAN Average RF Power – Ant 5

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	14.50	15.50	15.50
2437	6	14.40	15.50	15.50
2462	11	14.45	15.40	15.40

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 118 of 234

Table 8-171
5 GHz WLAN Average RF Power – Ant 5

5GHz (80MHz) Conducted Power [dBm]		
Freq [MHz]	Channel	IEEE Transmission Mode
		802.11ac
		Average
5210	42	8.48
5290	58	9.99
5530	106	8.43
5610	122	8.45
5690	138	8.48
5775	155	8.98

Table 8-172
5 GHz WLAN Average RF Power – Ant 6

5GHz (80MHz) Conducted Power [dBm]		
Freq [MHz]	Channel	IEEE Transmission Mode
		802.11ac
		Average
5210	42	11.97
5290	58	12.00
5530	106	10.48
5610	122	10.49
5690	138	10.50
5775	155	9.99

8.5.3 WLAN Power Reduction Verification Summary

Table 8-173
WLAN Power Reduction Verification

Antenna	Mode/Band	Condition (s)	Maximum Target Power [dBm]	Reduced Target Power [dBm]	Maximum Measured Power	Reduced Measured Power	Verdict
			(Tolerance [dB])	Tolerance [dB]	[dBm]	[dBm]	
ANT2A	2.4 GHz WLAN	Main Band 2a/2b ON	12.25 (±1.5)	5.25 (±1.5)	12.31	5.23	PASS
ANT4A		Main Band 4a/4b ON	12.25 (±1.5)	5.25 (±1.5)	13.22	6.26	PASS
ANT5		Main Band 2a ON	17.5 (±1.5)	14.0 (±1.5)	16.39	13.51	PASS
ANT5	5 GHz WLAN	Main Band 2a ON	15.5 (±1.5)	8.5 (±1.5)	15.01	9.71	PASS
ANT6		Main Band 3 ON	15.5 (±1.5)	10.5 (±1.5)	15.81	9.97	PASS

Conducted powers were measured for each Mode/Band and applied condition. All conducted power measurements were verified to be within tolerance.

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 119 of 234

8.5.4 Notes for WLAN

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- The WLAN chipset in this device is produced by two different suppliers. The electrically identical modules are manufactured with the identical mechanical structure to meet the same specifications and functions. Two device variants are referenced as Variant 1 and Variant 2 in this report.
- WLAN SAR worst case configuration was spotchecked on Variant 1 and Variant 2. The Variant with the highest reported SAR value was evaluated for the remaining WLAN configurations.
- The bolded data rate and channel above were tested for SAR.

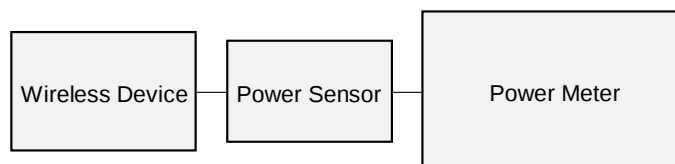


Figure 8-4
Power Measurement Setup

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 120 of 234

8.6 Bluetooth Conducted Powers

Table 8-174
Maximum Bluetooth Average RF Power – Ant 4A - Variant 1

Frequency [MHz]	Data Rate [Mbps]	Mod.	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	1.0	GFSK	0	15.95	39.355
2441	1.0	GFSK	39	15.90	38.905
2480	1.0	GFSK	78	15.01	31.696
2402	1.0	GFSK	0	10.68	11.695
2441	1.0	GFSK	39	11.46	13.996
2480	1.0	GFSK	78	9.37	8.650
2402	3.0	8DPSK	0	13.09	20.370
2441	3.0	8DPSK	39	13.22	20.989
2480	3.0	8DPSK	78	13.30	21.380
2402	3.0	8DPSK	0	7.77	5.984
2441	3.0	8DPSK	39	7.27	5.333
2480	3.0	8DPSK	78	7.68	5.861

Table 8-175
Maximum Bluetooth Average RF Power – Ant 2A - Variant 1

Frequency [MHz]	Data Rate [Mbps]	Mod.	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	1.0	GFSK	0	15.00	31.623
2441	1.0	GFSK	39	14.71	29.580
2480	1.0	GFSK	78	14.66	29.242
2402	1.0	GFSK	0	8.97	7.889
2441	1.0	GFSK	39	9.00	7.943
2480	1.0	GFSK	78	8.51	7.096
2402	3.0	8DPSK	0	10.87	12.218
2441	3.0	8DPSK	39	11.12	12.942
2480	3.0	8DPSK	78	10.71	11.776
2402	3.0	8DPSK	0	4.43	2.773
2441	3.0	8DPSK	39	4.81	3.027
2480	3.0	8DPSK	78	5.03	3.184

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 121 of 234

Table 8-176
Maximum Bluetooth Average RF Power – Ant 5 - Variant 1

Frequency [MHz]	Data Rate [Mbps]	Mod.	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	1.0	GFSK	0	18.50	70.795
2441	1.0	GFSK	39	17.91	61.802
2480	1.0	GFSK	78	18.02	63.387
2402	1.0	GFSK	0	9.23	8.375
2441	1.0	GFSK	39	10.37	10.889
2480	1.0	GFSK	78	9.50	8.913
2402	3.0	8DPSK	0	11.33	13.583
2441	3.0	8DPSK	39	11.37	13.709
2480	3.0	8DPSK	78	11.50	14.125
2402	3.0	8DPSK	0	5.27	3.365
2441	3.0	8DPSK	39	5.47	3.524
2480	3.0	8DPSK	78	5.67	3.690

Table 8-177
Maximum Bluetooth Average RF Power – Ant 4A - Variant 2

Frequency [MHz]	Data Rate [Mbps]	Modulation	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	1.0	GFSK	0	16.00	39.811
2441	1.0	GFSK	39	15.99	39.719
2480	1.0	GFSK	78	15.66	36.813

Table 8-178
Maximum Bluetooth Average RF Power – Ant 2A - Variant 2

Frequency [MHz]	Data Rate [Mbps]	Modulation	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	1.0	GFSK	0	15.00	31.623
2441	1.0	GFSK	39	14.89	30.832
2480	1.0	GFSK	78	14.95	31.261

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 122 of 234

Table 8-179
Maximum Bluetooth Average RF Power – Ant 5 - Variant 2

Frequency [MHz]	Data Rate [Mbps]	Modulation	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	1.0	GFSK	0	18.50	70.795
2441	1.0	GFSK	39	18.50	70.795
2480	1.0	GFSK	78	17.98	62.806

Table 8-180
Reduced Bluetooth Average RF Power – Ant 4A - Variant 1

Frequency [MHz]	Data Rate [Mbps]	Modulation	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	1.0	GFSK	0	8.68	7.379
2441	1.0	GFSK	39	8.36	6.855
2480	1.0	GFSK	78	7.71	5.902

Table 8-181
Reduced Power Level 1 Bluetooth Average RF Power – Ant 2A - Variant 1

Frequency [MHz]	Data Rate [Mbps]	Modulation	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	1.0	GFSK	0	11.90	15.488
2441	1.0	GFSK	39	12.16	16.444
2480	1.0	GFSK	78	11.94	15.631

Table 8-182
Reduced Power Level 2 Bluetooth Average RF Power – Ant 2A - Variant 1

Frequency [MHz]	Data Rate [Mbps]	Modulation	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	1.0	GFSK	0	7.37	5.458
2441	1.0	GFSK	39	7.49	5.610
2480	1.0	GFSK	78	7.58	5.728

FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 123 of 234

Table 8-183
Reduced Power Level 1 Bluetooth Average RF Power – Ant 5 - Variant 1

Frequency [MHz]	Data Rate [Mbps]	Modulation	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	1.0	GFSK	0	15.15	32.734
2441	1.0	GFSK	39	15.00	31.623
2480	1.0	GFSK	78	15.00	31.623

Table 8-184
Reduced Power Level 2 Bluetooth Average RF Power – Ant 5 - Variant 1

Frequency [MHz]	Data Rate [Mbps]	Modulation	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	1.0	GFSK	0	14.09	25.645
2441	1.0	GFSK	39	14.04	25.351
2480	1.0	GFSK	78	13.46	22.182

Table 8-185
Reduced Power Level 3 Bluetooth Average RF Power – Ant 5 - Variant 1

Frequency [MHz]	Data Rate [Mbps]	Modulation	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	1.0	GFSK	0	12.42	17.458
2441	1.0	GFSK	39	12.22	16.672
2480	1.0	GFSK	78	12.10	16.218

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 124 of 234

Table 8-186
Reduced Bluetooth Average RF Power – Ant 4A - Variant 2

Frequency [MHz]	Data Rate [Mbps]	Modulation	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	1.0	GFSK	0	8.94	7.834
2441	1.0	GFSK	39	9.00	7.943
2480	1.0	GFSK	78	7.73	5.929

Table 8-187
Reduced Power Level 1 Bluetooth Average RF Power – Ant 2A - Variant 2

Frequency [MHz]	Data Rate [Mbps]	Modulation	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	1.0	GFSK	0	12.40	17.378
2441	1.0	GFSK	39	12.49	17.742
2480	1.0	GFSK	78	12.50	17.783

Table 8-188
Reduced Power Level 2 Bluetooth Average RF Power – Ant 2A - Variant 2

Frequency [MHz]	Data Rate [Mbps]	Modulation	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	1.0	GFSK	0	7.77	5.984
2441	1.0	GFSK	39	7.74	5.943
2480	1.0	GFSK	78	8.00	6.310

Table 8-189
Reduced Power Level 1 Bluetooth Average RF Power – Ant 5 - Variant 2

Frequency [MHz]	Data Rate [Mbps]	Modulation	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	1.0	GFSK	0	15.50	35.481
2441	1.0	GFSK	39	15.41	34.754
2480	1.0	GFSK	78	15.26	33.574

FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 125 of 234

Table 8-190
Reduced Power Level 2 Bluetooth Average RF Power – Ant 5 - Variant 2

Frequency [MHz]	Data Rate [Mbps]	Modulation	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	1.0	GFSK	0	14.50	28.184
2441	1.0	GFSK	39	14.21	26.363
2480	1.0	GFSK	78	14.16	26.062

Table 8-191
Reduced Power Level 3 Bluetooth Average RF Power – Ant 5 - Variant 2

Frequency [MHz]	Data Rate [Mbps]	Modulation	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	1.0	GFSK	0	12.57	18.072
2441	1.0	GFSK	39	12.52	17.865
2480	1.0	GFSK	78	12.32	17.061

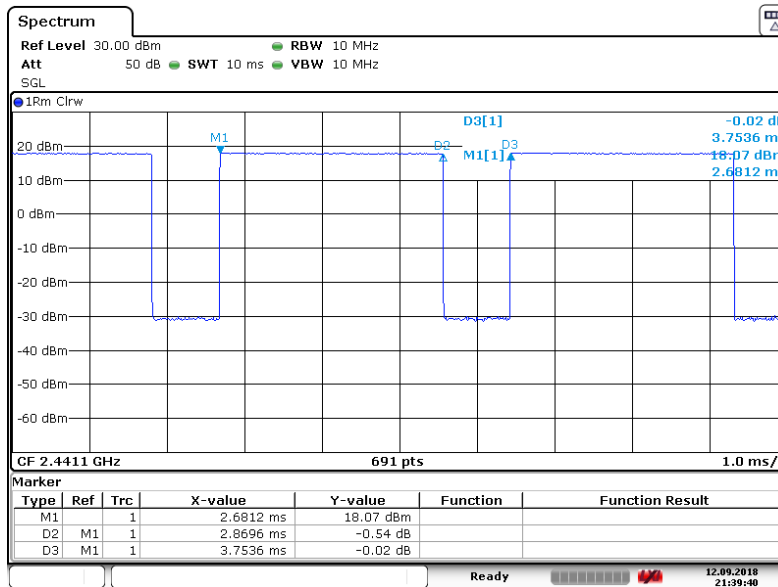


Figure 8-5
Bluetooth Transmission Plot & Duty Cycle Calculation – Ant 4A Variant 1

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.8696\text{ms}}{3.7536\text{ms}} * 100\% = 76.5\%$$

FCC ID: BCGA1934	PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 126 of 234

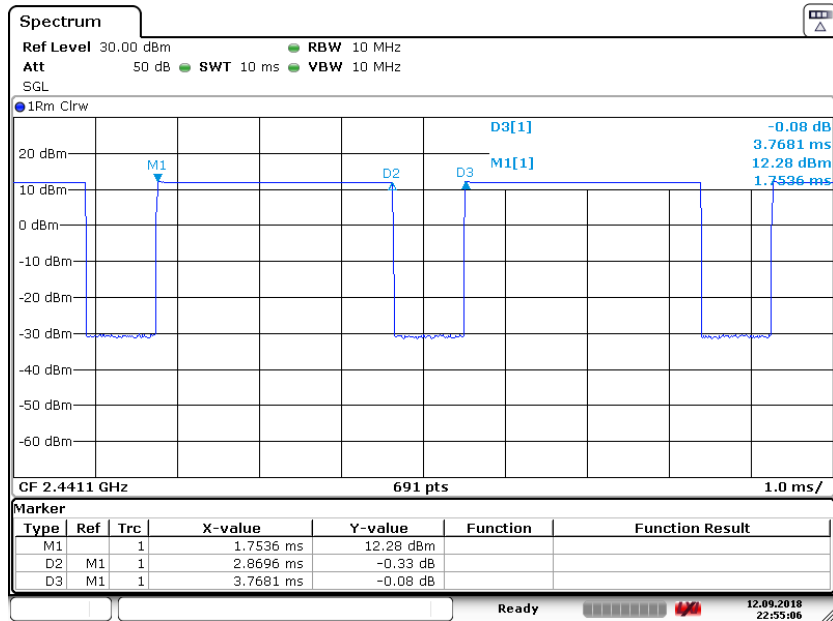


Figure 8-6
Bluetooth Transmission Plot & Duty Cycle Calculation – Ant 4A Variant 2

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.8696\text{ms}}{3.7681\text{ms}} * 100\% = 76.2\%$$

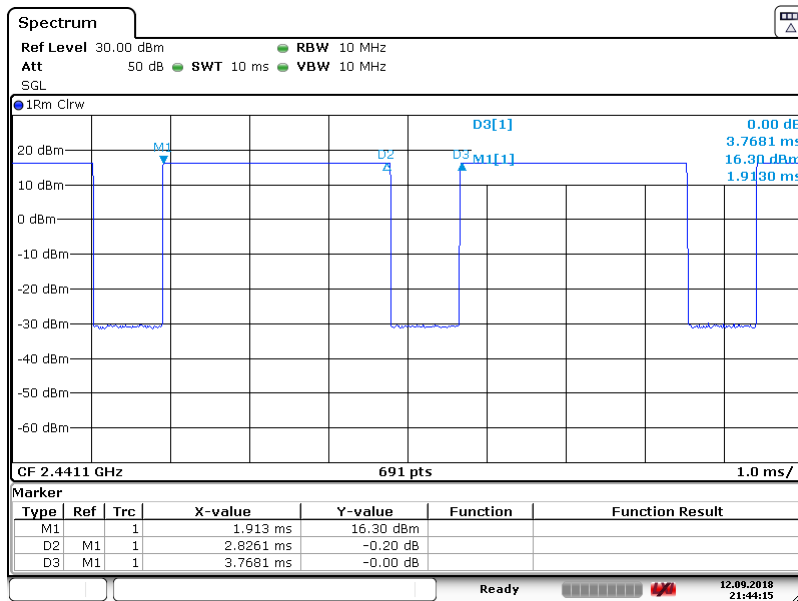


Figure 8-7
Bluetooth Transmission Plot & Duty Cycle Calculation – Ant 2A Variant 1

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.8261\text{ms}}{3.7681\text{ms}} * 100\% = 75.0\%$$

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 127 of 234

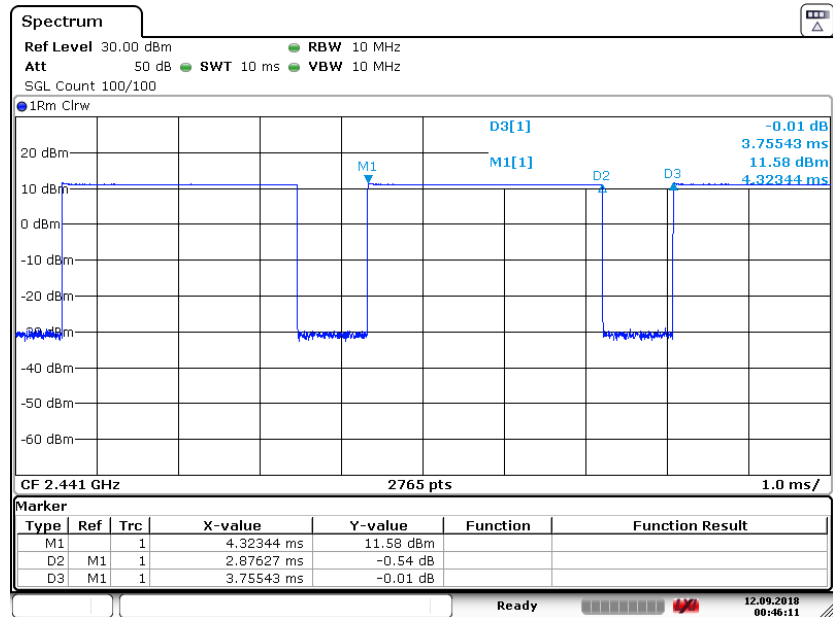


Figure 8-8
Bluetooth Transmission Plot & Duty Cycle Calculation – Ant 2A Variant 2

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.8763\text{ms}}{3.7554\text{ms}} * 100\% = 76.6\%$$

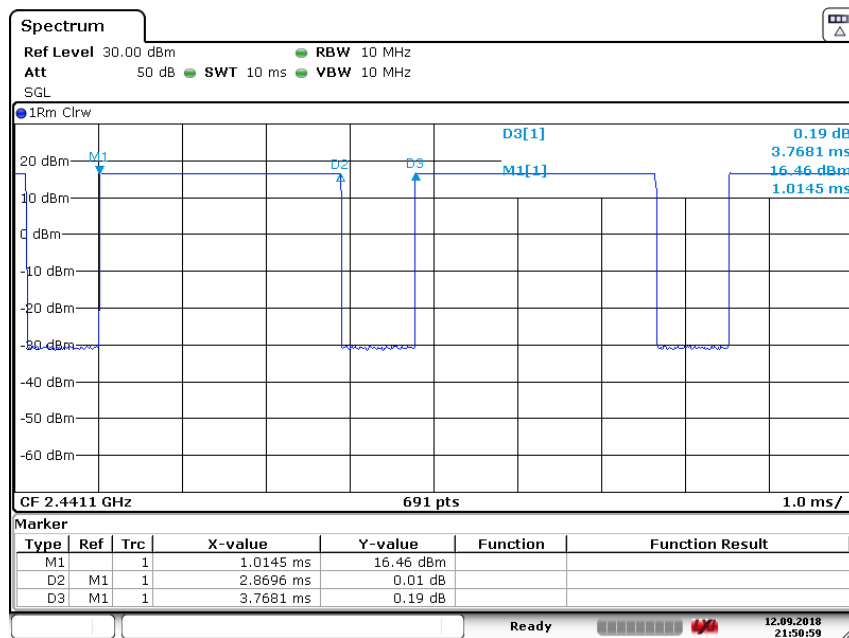


Figure 8-9
Bluetooth Transmission Plot & Duty Cycle Calculation – Ant 5 Variant 1

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.8696\text{ms}}{3.7681\text{ms}} * 100\% = 76.2\%$$

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 128 of 234

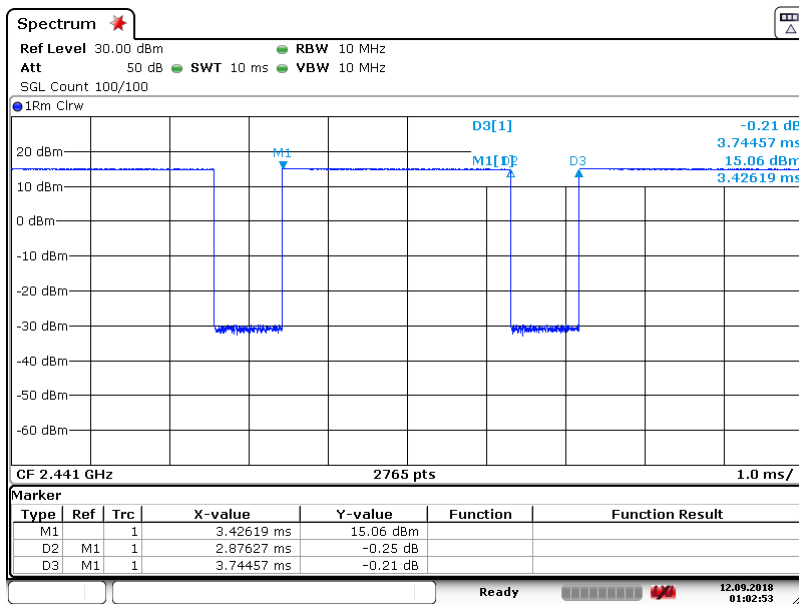


Figure 8-10
Bluetooth Transmission Plot & Duty Cycle Calculation – Ant 5 Variant 2

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.8763\text{ms}}{3.7446\text{ms}} * 100\% = 76.8\%$$

8.6.1 Bluetooth Power Reduction Verification Summary

Table 8-192
Bluetooth Power Reduction Verification

Antenna	Mode/Band	Condition (s)	Maximum Target Power [dBm] (Tolerance [dB])	Reduced Target Power [dBm] Tolerance [dB]	Maximum Measured Power [dBm]	Reduced Measured Power [dBm]	Verdict
ANT4A	2.4 GHz Bluetooth	Main Band ANT3/4a/4b ON	14.5 (+1.5/-2.0)	7.5 (+1.5/-2.0)	15.54	8.66	PASS
ANT2A	2.4 GHz Bluetooth	5 GHz WLAN ON	13.5 (+1.5/-2.0)	11.0 (+1.5/-2.0)	14.23	11.39	PASS
	2.4 GHz Bluetooth	Main Band ANT1/2a/2b ON	13.5 (+1.5/-2.0)	6.5 (+1.5/-2.0)	14.51	7.89	PASS
	2.4 GHz Bluetooth	5 GHz WLAN ON, Main Band ANT1/2a/2b ON	13.5 (+1.5/-2.0)	6.5 (+1.5/-2.0)	14.48	7.77	PASS
ANT5	2.4 GHz Bluetooth	Main Band ANT1/2a/2b ON	17.0 (+1.5/-2.0)	15.5 (+1.5/-2.0)	17.88	16.52	PASS
	2.4 GHz Bluetooth	5 GHz WLAN ON	17.0 (+1.5/-2.0)	13.0 (+1.5/-2.0)	18.02	13.72	PASS
	2.4 GHz Bluetooth	5 GHz WLAN ON, Main Band ANT1/2a/2b ON	17.0 (+1.5/-2.0)	11.0 (+1.5/-2.0)	17.91	11.27	PASS

Conducted powers were measured for each Mode/Band and applied condition. All conducted power measurements were verified to be within tolerance.

FCC ID: BCGA1934	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 129 of 234

8.6.2 Notes for Bluetooth

- The Bluetooth chipset in this device is produced by two different suppliers. The electrically identical modules are manufactured with the identical mechanical structure to meet the same specifications and functions. Two device variants are referenced as Variant 1 and Variant 2 in this report.
- Bluetooth SAR worst case configuration was spotchecked on Variant 1 and Variant 2. The Variant with the highest reported SAR value was evaluated for the remaining Bluetooth configurations.
- Full power measurements were performed for Variant 1 and Variant 2 per FCC KDB Procedures 248227.

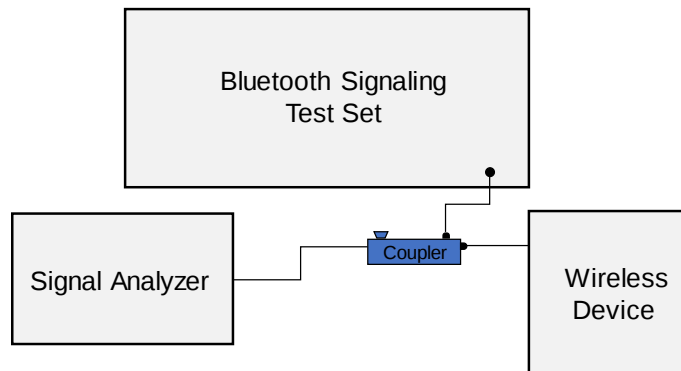


Figure 8-11
Power Measurement Setup

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 130 of 234

9 SYSTEM VERIFICATION

9.1 Tissue Verification

Table 9-1
Measured Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
9/3/2018	750B	24.5	700	0.928	55.191	0.959	55.726	-3.23%	-0.96%
			710	0.938	55.096	0.960	55.687	-2.29%	-1.06%
			725	0.951	54.950	0.961	55.629	-1.04%	-1.22%
			740	0.963	54.809	0.963	55.570	0.00%	-1.37%
			755	0.976	54.661	0.964	55.512	1.24%	-1.53%
9/3/2018	750B	21.5	740	0.955	55.059	0.963	55.570	-0.83%	-0.92%
			755	0.970	54.894	0.964	55.512	0.62%	-1.11%
			770	0.986	54.731	0.965	55.453	2.18%	-1.30%
			785	1.001	54.574	0.966	55.395	3.62%	-1.48%
			800	1.015	54.422	0.967	55.336	4.96%	-1.65%
8/27/2018	835B	21.0	800	0.950	53.478	0.967	55.336	-1.76%	-3.36%
			820	0.970	53.276	0.969	55.258	0.10%	-3.59%
			835	0.984	53.125	0.970	55.200	1.44%	-3.76%
			850	0.998	52.987	0.988	55.154	1.01%	-3.93%
			820	0.984	53.562	0.969	55.258	1.55%	-3.07%
8/30/2018	835B	21.4	835	0.997	53.399	0.970	55.200	2.78%	-3.26%
			850	1.014	53.336	0.988	55.154	2.63%	-3.30%
			820	0.983	54.301	0.969	55.258	1.44%	-1.73%
9/2/2018	835B	20.9	835	0.998	54.145	0.970	55.200	2.89%	-1.91%
			850	1.013	53.995	0.988	55.154	2.53%	-2.10%
			1710	1.460	51.767	1.463	53.537	-0.21%	-3.31%
8/31/2018	1750B	21.2	1750	1.487	51.718	1.488	53.432	-0.07%	-3.21%
			1790	1.515	51.654	1.514	53.326	0.07%	-3.14%
			1710	1.467	53.014	1.463	53.537	0.27%	-0.98%
9/3/2018	1750B	21.0	1750	1.494	52.974	1.488	53.432	0.40%	-0.86%
			1790	1.524	52.921	1.514	53.326	0.66%	-0.76%
			1850	1.529	51.045	1.520	53.300	0.59%	-4.23%
9/3/2018	1900B	22.5	1880	1.557	50.951	1.520	53.300	2.43%	-4.41%
			1910	1.584	50.858	1.520	53.300	4.21%	-4.58%
			1850	1.534	52.677	1.520	53.300	0.92%	-1.17%
9/4/2018	1900B	24.0	1880	1.560	52.621	1.520	53.300	2.63%	-1.27%
			1910	1.588	52.529	1.520	53.300	4.47%	-1.45%
			2300	1.872	51.339	1.809	52.900	3.48%	-2.95%
9/3/2018	2300B	22.5	2310	1.883	51.313	1.816	52.887	3.69%	-2.98%
			2320	1.894	51.284	1.826	52.873	3.72%	-3.01%
			2400	1.974	51.591	1.902	52.767	3.79%	-2.23%
8/13/2018	2450B	21.6	2450	2.042	51.408	1.950	52.700	4.72%	-2.45%
			2500	2.113	51.199	2.021	52.636	4.55%	-2.73%
			2400	1.976	51.436	1.902	52.767	3.89%	-2.52%
8/29/2018	2450B	21.6	2450	2.045	51.225	1.950	52.700	4.87%	-2.80%
			2500	2.115	51.020	2.021	52.636	4.65%	-3.07%
			2400	1.877	51.528	1.902	52.767	-1.31%	-2.35%
9/13/2018	2450B-2600B	23.4	2450	1.954	51.365	1.950	52.700	0.21%	-2.53%
			2500	2.012	51.184	2.021	52.636	-0.45%	-2.76%
			2550	2.085	50.986	2.092	52.573	-0.33%	-3.02%
			2600	2.149	50.833	2.163	52.509	-0.65%	-3.19%
			2650	2.224	50.598	2.234	52.445	-0.45%	-3.52%
			2700	2.287	50.458	2.305	52.382	-0.78%	-3.67%
			5240	5.528	48.186	5.346	48.960	3.40%	-1.58%
08/13/2018	5200B-5800B	22.1	5260	5.542	48.182	5.369	48.933	3.22%	-1.53%
			5280	5.577	48.138	5.393	48.906	3.41%	-1.57%
			5300	5.591	48.062	5.416	48.879	3.23%	-1.67%
			5320	5.615	48.032	5.439	48.851	3.24%	-1.68%
			5520	5.891	47.724	5.673	48.580	3.84%	-1.76%
			5540	5.913	47.706	5.696	48.553	3.81%	-1.74%
			5600	6.001	47.597	5.766	48.471	4.08%	-1.80%
			5620	6.026	47.554	5.790	48.444	4.08%	-1.84%
			5680	6.115	47.447	5.860	48.363	4.35%	-1.89%
			5700	6.142	47.441	5.883	48.336	4.40%	-1.85%
			5745	6.205	47.376	5.936	48.275	4.53%	-1.86%
			5765	6.242	47.373	5.959	48.248	4.75%	-1.81%
			5785	6.273	47.318	5.982	48.220	4.86%	-1.87%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 131 of 234

9.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.

Table 9-2
System Verification Results

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR _{1g} (W/kg)	1 W Target SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation _{1g} (%)
AM3	750	BODY	09/03/2018	22.7	23.0	0.200	1097	7416	1.780	8.560	8.900	3.97%
AM5	750	BODY	09/03/2018	23.1	21.2	0.200	1057	7490	1.660	8.790	8.300	-5.57%
AM5	835	BODY	08/27/2018	21.9	21.4	0.200	4d180	7490	2.060	9.590	10.300	7.40%
AM5	835	BODY	08/30/2018	22.7	21.8	0.200	4d180	7490	1.940	9.590	9.700	1.15%
AM5	835	BODY	09/02/2018	23.1	21.6	0.200	4d180	7490	1.910	9.590	9.550	-0.42%
AM8	1750	BODY	08/31/2018	21.5	21.2	0.100	1104	3287	3.740	36.600	37.400	2.19%
AM8	1750	BODY	09/03/2018	21.7	21.0	0.100	1104	3287	3.840	36.600	38.400	4.92%
AM6	1900	BODY	09/03/2018	23.0	21.0	0.100	5d181	3131	4.170	39.500	41.700	5.57%
AM3	1900	BODY	09/04/2018	23.0	22.1	0.100	5d181	3288	4.230	39.500	42.300	7.09%
AM2	2300	BODY	09/03/2018	22.1	22.5	0.100	1038	3022	4.910	46.700	49.100	5.14%
AM1	2450	BODY	08/13/2018	21.8	21.6	0.100	945	3275	5.360	49.400	53.600	8.50%
AM1	2450	BODY	08/29/2018	22.1	21.6	0.100	945	3275	5.220	49.400	52.200	5.67%
AM7	2450	BODY	09/13/2018	23.0	22.5	0.100	921	3329	5.210	50.700	52.100	2.76%
AM7	2600	BODY	09/13/2018	23.0	22.5	0.100	1069	3329	5.800	55.300	58.000	4.88%
AM6	5250	BODY	08/13/2018	23.3	22.1	0.050	1163	3837	3.570	77.400	71.400	-7.75%
AM6	5600	BODY	08/13/2018	23.3	22.1	0.050	1163	3837	3.850	79.700	77.000	-3.39%
AM6	5750	BODY	08/13/2018	23.3	22.1	0.050	1163	3837	3.610	77.400	72.200	-6.72%

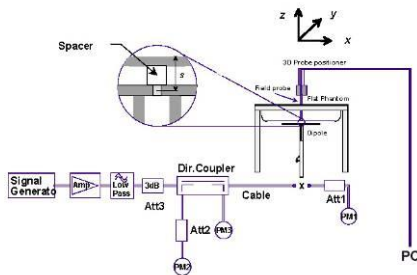


Figure 9-1
System Verification Setup Diagram



Figure 9-2
System Verification Setup Photo

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 132 of 234

10 SAR DATA SUMMARY

10.1 Standalone Body SAR Data

Table 10-1
GSM 850 Body SAR – Ant 1

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	(W/kg)		
836.60	190	GSM 850	GPRS	26.5	25.63	-0.05	0 mm	Ant 1	DLXX700ZL3TG	2	1:4.15	back	0.429	1.222	0.524	0.229	0.280	
836.60	190	GSM 850	GPRS	26.5	25.63	0.20	0 mm	Ant 1	DLXX700ZL3TG	2	1:4.15	bottom	0.262	1.222	0.320	0.101	0.123	
836.60	190	GSM 850	GPRS	26.5	25.63	0.20	0 mm	Ant 1	DLXX700ZL3TG	2	1:4.15	right	0.006	1.222	0.007	0.003	0.004	
824.20	128	GSM 850	GPRS	26.5	25.73	0.00	0 mm	Ant 1	DLXX700ZL3TG	2	1:4.15	left	0.858	1.194	1.024	0.300	0.358	
836.60	190	GSM 850	GPRS	26.5	25.63	-0.18	0 mm	Ant 1	DLXX700ZL3TG	2	1:4.15	left	0.740	1.222	0.904	0.263	0.321	
848.80	251	GSM 850	GPRS	26.5	25.62	-0.01	0 mm	Ant 1	DLXX700ZL3TG	2	1:4.15	left	0.640	1.225	0.784	0.247	0.303	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram											

Table 10-2
GSM 850 Body SAR – Ant 3

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	(W/kg)		
824.20	128	GSM 850	GPRS	27.7	26.89	-0.07	0 mm	Ant 3	DLXX700ZL3TG	2	1:4.15	back	0.819	1.205	0.987	0.415	0.500	
836.60	190	GSM 850	GPRS	27.7	26.86	-0.06	0 mm	Ant 3	DLXX700ZL3TG	2	1:4.15	back	0.861	1.213	1.044	0.437	0.530	A1
848.80	251	GSM 850	GPRS	27.7	26.83	-0.10	0 mm	Ant 3	DLXX700ZL3TG	2	1:4.15	back	0.715	1.222	0.874	0.366	0.447	
836.60	190	GSM 850	GPRS	27.7	26.86	-0.03	0 mm	Ant 3	DLXX700ZL3TG	2	1:4.15	top	0.412	1.213	0.500	0.165	0.200	
824.20	128	GSM 850	GPRS	27.7	26.89	-0.16	0 mm	Ant 3	DLXX700ZL3TG	2	1:4.15	right	0.675	1.205	0.813	0.281	0.339	
836.60	190	GSM 850	GPRS	27.7	26.86	-0.01	0 mm	Ant 3	DLXX700ZL3TG	2	1:4.15	right	0.684	1.213	0.830	0.280	0.340	
848.80	251	GSM 850	GPRS	27.7	26.83	-0.06	0 mm	Ant 3	DLXX700ZL3TG	2	1:4.15	right	0.554	1.222	0.677	0.232	0.284	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram											

Table 10-3
GSM 1900 Body SAR – Ant 4A

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	(W/kg)		
1850.20	512	GSM 1900	GPRS	21.3	20.80	-0.03	0 mm	Ant 4A	DLXX700UL3TG	2	1:4.15	back	0.906	1.122	1.017	0.429	0.481	
1880.00	661	GSM 1900	GPRS	21.3	20.73	0.01	0 mm	Ant 4A	DLXX700UL3TG	2	1:4.15	back	0.886	1.140	1.010	0.416	0.474	
1909.80	810	GSM 1900	GPRS	21.3	20.68	-0.01	0 mm	Ant 4A	DLXX700UL3TG	2	1:4.15	back	0.926	1.153	1.068	0.430	0.496	A2
1880.00	661	GSM 1900	GPRS	21.3	20.73	-0.02	0 mm	Ant 4A	DLXX700UL3TG	2	1:4.15	top	0.315	1.140	0.359	0.116	0.132	
1880.00	661	GSM 1900	GPRS	21.3	20.73	0.15	0 mm	Ant 4A	DLXX700UL3TG	2	1:4.15	right	0.001	1.140	0.001	0.000	0.000	
1850.20	512	GSM 1900	GPRS	21.3	20.80	-0.03	0 mm	Ant 4A	DLXX700UL3TG	2	1:4.15	left	0.675	1.122	0.757	0.291	0.327	
1880.00	661	GSM 1900	GPRS	21.3	20.73	0.06	0 mm	Ant 4A	DLXX700UL3TG	2	1:4.15	left	0.773	1.140	0.881	0.318	0.363	
1909.80	810	GSM 1900	GPRS	21.3	20.68	-0.01	0 mm	Ant 4A	DLXX700UL3TG	2	1:4.15	left	0.701	1.153	0.808	0.297	0.342	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 133 of 234

Table 10-4
GSM 1900 Body SAR – Ant 4B

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	(W/kg)		
1850.20	512	GSM 1900	GPRS	20.5	19.70	-0.06	0 mm	Ant 4B	DLX700UL3TG	2	1:4.15	back	0.765	1.202	0.920	0.327	0.393	
1880.00	661	GSM 1900	GPRS	20.5	19.53	-0.01	0 mm	Ant 4B	DLX700UL3TG	2	1:4.15	back	0.774	1.250	0.968	0.330	0.413	
1909.80	810	GSM 1900	GPRS	20.5	19.60	-0.08	0 mm	Ant 4B	DLX700UL3TG	2	1:4.15	back	0.797	1.230	0.980	0.339	0.417	
1880.00	661	GSM 1900	GPRS	20.5	19.53	0.05	0 mm	Ant 4B	DLX700UL3TG	2	1:4.15	top	0.624	1.250	0.780	0.247	0.309	
1880.00	661	GSM 1900	GPRS	20.5	19.53	0.19	0 mm	Ant 4B	DLX700UL3TG	2	1:4.15	right	0.011	1.250	0.014	0.005	0.006	
1880.00	661	GSM 1900	GPRS	20.5	19.53	0.00	0 mm	Ant 4B	DLX700UL3TG	2	1:4.15	left	0.053	1.250	0.066	0.022	0.028	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak							Body 1.6 W/kg (mW/g) averaged over 1 gram											
Uncontrolled Exposure/General Population																		

Table 10-5
GSM 1900 Body SAR – Ant 2A

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	(W/kg)		
1850.20	512	GSM 1900	GPRS	20.3	19.50	-0.01	0 mm	Ant 2A	DLXX700UL3TG	2	1:4.15	back	0.646	1.202	0.776	0.326	0.392	
1880.00	661	GSM 1900	GPRS	20.3	19.42	-0.03	0 mm	Ant 2A	DLXX700UL3TG	2	1:4.15	back	0.604	1.225	0.740	0.308	0.377	
1909.80	810	GSM 1900	GPRS	20.3	19.43	0.01	0 mm	Ant 2A	DLXX700UL3TG	2	1:4.15	back	0.570	1.222	0.697	0.289	0.353	
1880.00	661	GSM 1900	GPRS	20.3	19.42	0.00	0 mm	Ant 2A	DLXX700UL3TG	2	1:4.15	bottom	0.248	1.225	0.304	0.094	0.115	
1880.00	661	GSM 1900	GPRS	20.3	19.42	-0.05	0 mm	Ant 2A	DLXX700UL3TG	2	1:4.15	right	0.590	1.225	0.723	0.239	0.293	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram											

Table 10-6
GSM 1900 Body SAR – Ant 2B

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	(W/kg)		
1850.20	512	GSM 1900	GPRS	20.0	19.19	0.01	0 mm	Ant 2B	DLXX700UL3TG	2	1:4.15	back	0.648	1.205	0.781	0.279	0.336	
1880.00	661	GSM 1900	GPRS	20.0	19.20	0.02	0 mm	Ant 2B	DLXX700UL3TG	2	1:4.15	back	0.671	1.202	0.807	0.289	0.347	
1909.80	810	GSM 1900	GPRS	20.0	19.19	0.01	0 mm	Ant 2B	DLXX700UL3TG	2	1:4.15	back	0.664	1.205	0.800	0.283	0.341	
1880.00	661	GSM 1900	GPRS	20.0	19.20	0.00	0 mm	Ant 2B	DLXX700UL3TG	2	1:4.15	bottom	0.448	1.202	0.538	0.181	0.218	
1880.00	661	GSM 1900	GPRS	20.0	19.20	-0.03	0 mm	Ant 2B	DLXX700UL3TG	2	1:4.15	right	0.042	1.202	0.050	0.017	0.020	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 134 of 234

Table 10-7
UMTS 850 Body SAR – Ant 1

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	(W/kg)		
836.60	4183	UMTS 850	RMC	20.0	19.80	0.00	0 mm	Ant 1	DLXX7007L3TG	1:1	back	0.651	1.047	0.682	0.340	0.356	
836.60	4183	UMTS 850	RMC	20.0	19.80	-0.03	0 mm	Ant 1	DLXX7007L3TG	1:1	bottom	0.358	1.047	0.375	0.149	0.156	
836.60	4183	UMTS 850	RMC	20.0	19.80	-0.17	0 mm	Ant 1	DLXX7007L3TG	1:1	right	0.015	1.047	0.016	0.009	0.009	
826.40	4132	UMTS 850	RMC	20.0	19.64	0.10	0 mm	Ant 1	DLXX7007L3TG	1:1	left	1.090	1.086	1.184	0.364	0.395	A3
836.60	4183	UMTS 850	RMC	20.0	19.80	-0.02	0 mm	Ant 1	DLXX7007L3TG	1:1	left	1.000	1.047	1.047	0.343	0.359	
846.60	4233	UMTS 850	RMC	20.0	19.62	0.11	0 mm	Ant 1	DLXX7007L3TG	1:1	left	0.852	1.091	0.930	0.290	0.316	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram										

Table 10-8
UMTS 850 Body SAR – Ant 3

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	(W/kg)	(W/kg)	
826.40	4132	UMTS 850	RMC	21.2	20.70	-0.01	0 mm	Ant 3	DLXX7003L3TG	1:1	back	0.982	1.122	1.102	0.516	0.579	
836.60	4183	UMTS 850	RMC	21.2	20.90	-0.02	0 mm	Ant 3	DLXX7003L3TG	1:1	back	1.070	1.072	1.147	0.564	0.605	
846.60	4233	UMTS 850	RMC	21.2	20.79	0.00	0 mm	Ant 3	DLXX7003L3TG	1:1	back	1.060	1.099	1.165	0.557	0.612	
836.60	4183	UMTS 850	RMC	21.2	20.90	-0.02	0 mm	Ant 3	DLXX7003L3TG	1:1	top	0.522	1.072	0.560	0.198	0.212	
826.40	4132	UMTS 850	RMC	21.2	20.70	0.04	0 mm	Ant 3	DLXX7003L3TG	1:1	right	1.000	1.122	1.122	0.366	0.411	
836.60	4183	UMTS 850	RMC	21.2	20.90	0.06	0 mm	Ant 3	DLXX7003L3TG	1:1	right	1.000	1.072	1.072	0.370	0.397	
846.60	4233	UMTS 850	RMC	21.2	20.79	-0.18	0 mm	Ant 3	DLXX7003L3TG	1:1	right	0.772	1.099	0.848	0.306	0.336	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram										

Table 10-9
UMTS 1750 Body SAR – Ant 4A

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	(W/kg)		
1712.40	1312	UMTS 1750	RMC	15.0	14.50	-0.02	0 mm	Ant 4A	DLXX7007L3TG	1:1	back	0.875	1.122	0.982	0.429	0.481	
1732.40	1412	UMTS 1750	RMC	15.0	14.50	-0.01	0 mm	Ant 4A	DLXX7007L3TG	1:1	back	0.908	1.122	1.019	0.446	0.500	
1752.60	1513	UMTS 1750	RMC	15.0	14.43	-0.06	0 mm	Ant 4A	DLXX7007L3TG	1:1	back	0.794	1.140	0.905	0.392	0.447	
1732.40	1412	UMTS 1750	RMC	15.0	14.50	0.01	0 mm	Ant 4A	DLXX7007L3TG	1:1	top	0.286	1.122	0.321	0.116	0.130	
1732.40	1412	UMTS 1750	RMC	15.0	14.50	-0.12	0 mm	Ant 4A	DLXX7007L3TG	1:1	right	0.001	1.122	0.001	0.000	0.000	
1712.40	1312	UMTS 1750	RMC	15.0	14.50	0.02	0 mm	Ant 4A	DLXX7007L3TG	1:1	left	0.817	1.122	0.917	0.355	0.398	
1732.40	1412	UMTS 1750	RMC	15.0	14.50	0.01	0 mm	Ant 4A	DLXX7007L3TG	1:1	left	0.742	1.122	0.833	0.323	0.362	
1752.60	1513	UMTS 1750	RMC	15.0	14.43	0.02	0 mm	Ant 4A	DLXX7007L3TG	1:1	left	0.817	1.140	0.931	0.352	0.401	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 135 of 234

Table 10-10
UMTS 1750 Body SAR – Ant 4B

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	(W/kg)		
1712.40	1312	UMTS 1750	RMC	14.75	13.92	0.02	0 mm	Ant 4B	DLXX7007L3TG	1:1	back	0.810	1.211	0.981	0.353	0.427	
1732.40	1412	UMTS 1750	RMC	14.75	14.00	0.02	0 mm	Ant 4B	DLXX7007L3TG	1:1	back	0.844	1.189	1.004	0.367	0.436	
1752.60	1513	UMTS 1750	RMC	14.75	13.90	0.00	0 mm	Ant 4B	DLXX7007L3TG	1:1	back	0.860	1.216	1.046	0.375	0.456	
1732.40	1412	UMTS 1750	RMC	14.75	14.00	-0.01	0 mm	Ant 4B	DLXX7007L3TG	1:1	top	0.661	1.189	0.786	0.296	0.352	
1732.40	1412	UMTS 1750	RMC	14.75	14.00	0.11	0 mm	Ant 4B	DLXX7007L3TG	1:1	right	0.009	1.189	0.011	0.005	0.006	
1732.40	1412	UMTS 1750	RMC	14.75	14.00	0.00	0 mm	Ant 4B	DLXX7007L3TG	1:1	left	0.058	1.189	0.069	0.028	0.033	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram										

Table 10-11
UMTS 1750 Body SAR – Ant 2A

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	(W/kg)	(W/kg)	
1712.40	1312	UMTS 1750	RMC	14.7	14.20	-0.05	0 mm	Ant 2A	DLXX7007L3TG	1:1	back	0.929	1.122	1.042	0.458	0.514	
1732.40	1412	UMTS 1750	RMC	14.7	14.19	-0.04	0 mm	Ant 2A	DLXX7007L3TG	1:1	back	0.955	1.125	1.074	0.469	0.528	A4
1752.60	1513	UMTS 1750	RMC	14.7	14.08	-0.04	0 mm	Ant 2A	DLXX7007L3TG	1:1	back	0.938	1.153	1.082	0.461	0.532	
1732.40	1412	UMTS 1750	RMC	14.7	14.19	0.01	0 mm	Ant 2A	DLXX7007L3TG	1:1	bottom	0.241	1.125	0.271	0.097	0.109	
1712.40	1312	UMTS 1750	RMC	14.7	14.20	0.00	0 mm	Ant 2A	DLXX7007L3TG	1:1	right	0.825	1.122	0.926	0.348	0.390	
1732.40	1412	UMTS 1750	RMC	14.7	14.19	0.00	0 mm	Ant 2A	DLXX7007L3TG	1:1	right	0.814	1.125	0.916	0.343	0.386	
1752.60	1513	UMTS 1750	RMC	14.7	14.08	0.01	0 mm	Ant 2A	DLXX7007L3TG	1:1	right	0.794	1.153	0.915	0.331	0.382	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram										

Table 10-12
UMTS 1750 Body SAR – Ant 2B

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	(W/kg)	(W/kg)	
1712.40	1312	UMTS 1750	RMC	14.3	13.78	0.03	0 mm	Ant 2B	DLXX7007L3TG	1:1	back	0.868	1.127	0.978	0.374	0.421	
1732.40	1412	UMTS 1750	RMC	14.3	13.80	-0.01	0 mm	Ant 2B	DLXX7007L3TG	1:1	back	0.887	1.122	0.995	0.381	0.427	
1752.60	1513	UMTS 1750	RMC	14.3	13.70	0.00	0 mm	Ant 2B	DLXX7007L3TG	1:1	back	0.862	1.148	0.990	0.370	0.425	
1732.40	1412	UMTS 1750	RMC	14.3	13.80	0.00	0 mm	Ant 2B	DLXX7007L3TG	1:1	bottom	0.542	1.122	0.608	0.223	0.250	
1732.40	1412	UMTS 1750	RMC	14.3	13.80	0.00	0 mm	Ant 2B	DLXX7007L3TG	1:1	right	0.039	1.122	0.044	0.018	0.020	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 136 of 234

Table 10-13
UMTS 1900 Body SAR – Ant 4A

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	(W/kg)		
1852.40	9262	UMTS 1900	RMC	15.3	14.80	0.20	0 mm	Ant 4A	DLXX700ZL3TG	1:1	back	0.863	1.122	0.968	0.420	0.471	
1880.00	9400	UMTS 1900	RMC	15.3	14.62	-0.01	0 mm	Ant 4A	DLXX700ZL3TG	1:1	back	0.858	1.169	1.003	0.422	0.493	
1907.60	9538	UMTS 1900	RMC	15.3	14.70	0.14	0 mm	Ant 4A	DLXX700ZL3TG	1:1	back	0.818	1.148	0.939	0.404	0.464	
1880.00	9400	UMTS 1900	RMC	15.3	14.62	0.08	0 mm	Ant 4A	DLXX700ZL3TG	1:1	top	0.389	1.169	0.455	0.139	0.162	
1880.00	9400	UMTS 1900	RMC	15.3	14.62	0.20	0 mm	Ant 4A	DLXX700ZL3TG	1:1	right	0.001	1.169	0.001	0.000	0.000	
1852.40	9262	UMTS 1900	RMC	15.3	14.80	-0.05	0 mm	Ant 4A	DLXX700ZL3TG	1:1	left	0.903	1.122	1.013	0.369	0.414	
1880.00	9400	UMTS 1900	RMC	15.3	14.62	-0.04	0 mm	Ant 4A	DLXX700ZL3TG	1:1	left	0.920	1.169	1.075	0.376	0.440	A5
1907.60	9538	UMTS 1900	RMC	15.3	14.70	0.08	0 mm	Ant 4A	DLXX700ZL3TG	1:1	left	0.909	1.148	1.044	0.369	0.424	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram										

Table 10-14
UMTS 1900 Body SAR – Ant 4B

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	(W/kg)		
1852.40	9262	UMTS 1900	RMC	14.2	13.68	0.00	0 mm	Ant 4B	DLXX402AKR4X	1:1	back	0.868	1.127	0.978	0.373	0.420	
1880.00	9400	UMTS 1900	RMC	14.2	13.53	0.02	0 mm	Ant 4B	DLXX402AKR4X	1:1	back	0.906	1.167	1.057	0.390	0.455	
1907.60	9538	UMTS 1900	RMC	14.2	13.70	0.01	0 mm	Ant 4B	DLXX402AKR4X	1:1	back	0.893	1.122	1.002	0.386	0.433	
1880.00	9400	UMTS 1900	RMC	14.2	13.53	-0.01	0 mm	Ant 4B	DLXX402AKR4X	1:1	top	0.596	1.167	0.696	0.242	0.282	
1880.00	9400	UMTS 1900	RMC	14.2	13.53	0.20	0 mm	Ant 4B	DLXX402AKR4X	1:1	right	0.015	1.167	0.018	0.008	0.009	
1880.00	9400	UMTS 1900	RMC	14.2	13.53	-0.01	0 mm	Ant 4B	DLXX402AKR4X	1:1	left	0.052	1.167	0.061	0.025	0.029	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram										

Table 10-15
UMTS 1900 Body SAR – Ant 2A

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	(W/kg)		
1852.40	9262	UMTS 1900	RMC	14.0	13.50	-0.01	0 mm	Ant 2A	DLXX402AKR4X	1:1	back	0.776	1.122	0.871	0.368	0.413	
1880.00	9400	UMTS 1900	RMC	14.0	13.36	0.01	0 mm	Ant 2A	DLXX402AKR4X	1:1	back	0.782	1.159	0.906	0.370	0.429	
1907.60	9538	UMTS 1900	RMC	14.0	13.47	-0.03	0 mm	Ant 2A	DLXX402AKR4X	1:1	back	0.799	1.130	0.903	0.376	0.425	
1880.00	9400	UMTS 1900	RMC	14.0	13.36	0.02	0 mm	Ant 2A	DLXX402AKR4X	1:1	bottom	0.235	1.159	0.272	0.090	0.104	
1852.40	9262	UMTS 1900	RMC	14.0	13.50	0.04	0 mm	Ant 2A	DLXX402AKR4X	1:1	right	0.631	1.122	0.708	0.271	0.304	
1880.00	9400	UMTS 1900	RMC	14.0	13.36	0.02	0 mm	Ant 2A	DLXX402AKR4X	1:1	right	0.699	1.159	0.810	0.282	0.327	
1907.60	9538	UMTS 1900	RMC	14.0	13.47	0.03	0 mm	Ant 2A	DLXX402AKR4X	1:1	right	0.673	1.130	0.760	0.283	0.320	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 137 of 234

Table 10-16
UMTS 1900 Body SAR – Ant 2B

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	(W/kg)		
1852.40	9262	UMTS 1900	RMC	13.7	13.14	-0.03	0 mm	Ant 2B	DLXX402AKR4X	1:1	back	0.717	1.138	0.816	0.308	0.351	
1880.00	9400	UMTS 1900	RMC	13.7	13.15	0.02	0 mm	Ant 2B	DLXX402AKR4X	1:1	back	0.761	1.135	0.864	0.328	0.372	
1907.60	9538	UMTS 1900	RMC	13.7	13.20	0.00	0 mm	Ant 2B	DLXX402AKR4X	1:1	back	0.737	1.122	0.827	0.314	0.352	
1880.00	9400	UMTS 1900	RMC	13.7	13.15	0.01	0 mm	Ant 2B	DLXX402AKR4X	1:1	bottom	0.579	1.135	0.657	0.233	0.264	
1880.00	9400	UMTS 1900	RMC	13.7	13.15	0.02	0 mm	Ant 2B	DLXX402AKR4X	1:1	right	0.039	1.135	0.044	0.017	0.019	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT							Body										
Spatial Peak							1.6 W/kg (mW/g)										
Uncontrolled Exposure/General Population							averaged over 1 gram										

Table 10-17
LTE Band 12 Body SAR – Ant 1

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
707.50	23095	Mid	LTE Band 12	10	19.7	19.70	0.01	0	Ant 1	DLX0700UL3TG	QPSK	1	25	0 mm	back	1:1	0.560	1.000	0.560	0.248		
707.50	23095	Mid	LTE Band 12	10	19.7	19.60	0.00	0	Ant 1	DLX0700UL3TG	QPSK	25	0	0 mm	back	1:1	0.563	1.023	0.576	0.249	0.255	
707.50	23095	Mid	LTE Band 12	10	19.7	19.70	-0.03	0	Ant 1	DLX0700UL3TG	QPSK	1	25	0 mm	bottom	1:1	0.421	1.000	0.421	0.149	0.149	
707.50	23095	Mid	LTE Band 12	10	19.7	19.60	-0.02	0	Ant 1	DLX0700UL3TG	QPSK	25	0	0 mm	bottom	1:1	0.422	1.023	0.432	0.149	0.152	
707.50	23095	Mid	LTE Band 12	10	19.7	19.70	-0.18	0	Ant 1	DLX0700UL3TG	QPSK	1	25	0 mm	right	1:1	0.006	1.000	0.006	0.003	0.003	
707.50	23095	Mid	LTE Band 12	10	19.7	19.60	-0.16	0	Ant 1	DLX0700UL3TG	QPSK	25	0	0 mm	right	1:1	0.005	1.023	0.005	0.003	0.003	
707.50	23095	Mid	LTE Band 12	10	19.7	19.70	-0.06	0	Ant 1	DLX0700UL3TG	QPSK	1	25	0 mm	left	1:1	1.180	1.000	1.180	0.358	0.358	A6
707.50	23095	Mid	LTE Band 12	10	19.7	19.60	-0.16	0	Ant 1	DLX0700UL3TG	QPSK	25	0	0 mm	left	1:1	1.090	1.023	1.115	0.338	0.346	
707.50	23095	Mid	LTE Band 12	10	19.7	19.59	0.00	0	Ant 1	DLX0700UL3TG	QPSK	50	0	0 mm	left	1:1	1.080	1.026	1.108	0.336	0.345	
707.50	23095	Mid	LTE Band 12	10	19.7	19.70	-0.01	0	Ant 1	DLX0700UL3TG	QPSK	1	25	0 mm	left	1:1	1.100	1.000	1.100	0.351	0.351	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak								Body 1.6 W/kg (mW/g) averaged over 1 gram														
Uncontrolled Exposure/General Population																						

Note: Blue entry represents variability measurement.

Table 10-18
LTE Band 12 Body SAR – Ant 3

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
707.50	23095	Mid	LTE Band 12	10	20.0	19.96	-0.03	0	Ant 3	DLXX700UL3TG	QPSK	1	0	0 mm	back	1:1	1.080	1.009	1.090	0.526	0.531	
707.50	23095	Mid	LTE Band 12	10	20.0	19.93	-0.04	0	Ant 3	DLXX700UL3TG	QPSK	25	0	0 mm	back	1:1	1.030	1.016	1.046	0.510	0.518	
707.50	23095	Mid	LTE Band 12	10	20.0	19.92	-0.04	0	Ant 3	DLXX700UL3TG	QPSK	50	0	0 mm	back	1:1	1.020	1.019	1.039	0.501	0.511	
707.50	23095	Mid	LTE Band 12	10	20.0	19.96	-0.02	0	Ant 3	DLXX700UL3TG	QPSK	1	0	0 mm	top	1:1	0.502	1.009	0.507	0.184	0.186	
707.50	23095	Mid	LTE Band 12	10	20.0	19.93	-0.02	0	Ant 3	DLXX700UL3TG	QPSK	25	0	0 mm	top	1:1	0.497	1.016	0.505	0.182	0.185	
707.50	23095	Mid	LTE Band 12	10	20.0	19.96	-0.06	0	Ant 3	DLXX700UL3TG	QPSK	1	0	0 mm	right	1:1	0.923	1.009	0.931	0.326	0.329	
707.50	23095	Mid	LTE Band 12	10	20.0	19.93	-0.02	0	Ant 3	DLXX700UL3TG	QPSK	25	0	0 mm	right	1:1	0.904	1.016	0.918	0.309	0.314	
707.50	23095	Mid	LTE Band 12	10	20.0	19.92	-0.05	0	Ant 3	DLXX700UL3TG	QPSK	50	0	0 mm	right	1:1	0.851	1.019	0.867	0.286	0.291	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak								Body 1.6 W/kg (mW/g) averaged over 1 gram														
Uncontrolled Exposure/General Population																						

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 138 of 234

Table 10-19
LTE Band 13 Body SAR – Ant 1

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
782.00	23230	Mid	LTE Band 13	10	21.3	21.30	0.01	0	Ant 1	DLXX402AKR4X	QPSK	1	0	0 mm	back	1:1	0.843	1.000	0.843	0.425	0.425	
782.00	23230	Mid	LTE Band 13	10	21.3	21.15	0.01	0	Ant 1	DLXX402AKR4X	QPSK	25	12	0 mm	back	1:1	0.770	1.035	0.797	0.386	0.400	
782.00	23230	Mid	LTE Band 13	10	21.3	21.14	0.02	0	Ant 1	DLXX402AKR4X	QPSK	50	0	0 mm	back	1:1	0.772	1.038	0.801	0.388	0.403	
782.00	23230	Mid	LTE Band 13	10	21.3	21.30	-0.04	0	Ant 1	DLXX402AKR4X	QPSK	1	0	0 mm	bottom	1:1	0.516	1.000	0.516	0.213	0.213	
782.00	23230	Mid	LTE Band 13	10	21.3	21.15	0.01	0	Ant 1	DLXX402AKR4X	QPSK	25	12	0 mm	bottom	1:1	0.512	1.035	0.530	0.213	0.220	
782.00	23230	Mid	LTE Band 13	10	21.3	21.30	0.21	0	Ant 1	DLXX402AKR4X	QPSK	1	0	0 mm	right	1:1	0.010	1.000	0.010	0.006	0.006	
782.00	23230	Mid	LTE Band 13	10	21.3	21.15	0.06	0	Ant 1	DLXX402AKR4X	QPSK	25	12	0 mm	right	1:1	0.009	1.035	0.009	0.005	0.005	
782.00	23230	Mid	LTE Band 13	10	21.3	21.30	-0.03	0	Ant 1	DLXX402AKR4X	QPSK	1	0	0 mm	left	1:1	0.974	1.000	0.974	0.340	0.340	
782.00	23230	Mid	LTE Band 13	10	21.3	21.15	0.01	0	Ant 1	DLXX402AKR4X	QPSK	25	12	0 mm	left	1:1	0.903	1.035	0.935	0.313	0.324	
782.00	23230	Mid	LTE Band 13	10	21.3	21.14	-0.02	0	Ant 1	DLXX402AKR4X	QPSK	50	0	0 mm	left	1:1	0.904	1.038	0.938	0.312	0.324	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT																						
Spatial Peak									Body													
Uncontrolled Exposure/General Population									1.6 W/kg (mW/g) averaged over 1 gram													

Table 10-20
LTE Band 13 Body SAR – Ant 3

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
782.00	23230	Mid	LTE Band 13	10	21.3	21.30	0.00	0	Ant 3	DLX0402AKR4X	QPSK	1	49	0 mm	back	1:1	0.893	1.000	0.893	0.458	0.458	
782.00	23230	Mid	LTE Band 13	10	21.3	21.30	0.00	0	Ant 3	DLX0402AKR4X	QPSK	25	25	0 mm	back	1:1	0.945	1.000	0.945	0.484	0.484	
782.00	23230	Mid	LTE Band 13	10	21.3	21.29	0.12	0	Ant 3	DLX0402AKR4X	QPSK	50	0	0 mm	back	1:1	0.981	1.002	0.983	0.502	0.503	A7
782.00	23230	Mid	LTE Band 13	10	21.3	21.30	0.06	0	Ant 3	DLX0402AKR4X	QPSK	1	49	0 mm	top	1:1	0.533	1.000	0.533	0.208	0.208	
782.00	23230	Mid	LTE Band 13	10	21.3	21.30	0.07	0	Ant 3	DLX0402AKR4X	QPSK	25	25	0 mm	top	1:1	0.551	1.000	0.551	0.214	0.214	
782.00	23230	Mid	LTE Band 13	10	21.3	21.30	-0.04	0	Ant 3	DLX0402AKR4X	QPSK	1	49	0 mm	right	1:1	0.554	1.000	0.554	0.188	0.188	
782.00	23230	Mid	LTE Band 13	10	21.3	21.30	0.02	0	Ant 3	DLX0402AKR4X	QPSK	25	25	0 mm	right	1:1	0.586	1.000	0.586	0.195	0.195	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT									Body													
Spatial Peak									1.6 W/kg (mW/g)													
Uncontrolled Exposure/General Population									averaged over 1 gram													

Table 10-21
LTE Band 14 Body SAR – Ant 1

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)	(W/kg)		
793.00	23330	Mid	LTE Band 14	10	21.3	21.25	0.11	0	Ant 1	DLX0402AKR4X	QPSK	1	0	0 mm	back	1:1	0.859	1.012	0.869	0.436	0.441	
793.00	23330	Mid	LTE Band 14	10	21.3	21.24	0.04	0	Ant 1	DLX0402AKR4X	QPSK	25	0	0 mm	back	1:1	0.847	1.014	0.859	0.428	0.434	
793.00	23330	Mid	LTE Band 14	10	21.3	21.22	0.02	0	Ant 1	DLX0402AKR4X	QPSK	50	0	0 mm	back	1:1	0.822	1.019	0.838	0.415	0.423	
793.00	23330	Mid	LTE Band 14	10	21.3	21.25	0.03	0	Ant 1	DLX0402AKR4X	QPSK	1	0	0 mm	bottom	1:1	0.600	1.012	0.607	0.226	0.229	
793.00	23330	Mid	LTE Band 14	10	21.3	21.24	0.04	0	Ant 1	DLX0402AKR4X	QPSK	25	0	0 mm	bottom	1:1	0.607	1.014	0.615	0.228	0.231	
793.00	23330	Mid	LTE Band 14	10	21.3	21.25	0.14	0	Ant 1	DLX0402AKR4X	QPSK	1	0	0 mm	right	1:1	0.011	1.012	0.011	0.006	0.006	
793.00	23330	Mid	LTE Band 14	10	21.3	21.24	0.12	0	Ant 1	DLX0402AKR4X	QPSK	25	0	0 mm	right	1:1	0.013	1.014	0.013	0.007	0.007	
793.00	23330	Mid	LTE Band 14	10	21.3	21.25	0.03	0	Ant 1	DLX0402AKR4X	QPSK	1	0	0 mm	left	1:1	0.978	1.012	0.990	0.310	0.314	
793.00	23330	Mid	LTE Band 14	10	21.3	21.24	-0.02	0	Ant 1	DLX0402AKR4X	QPSK	25	0	0 mm	left	1:1	0.981	1.014	0.995	0.305	0.309	A8
793.00	23330	Mid	LTE Band 14	10	21.3	21.22	0.01	0	Ant 1	DLX0402AKR4X	QPSK	50	0	0 mm	left	1:1	0.938	1.019	0.956	0.292	0.298	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram													

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 139 of 234

Table 10-22
LTE Band 14 Body SAR – Ant 3

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
793.00	23330	Mid	LTE Band 14	10	21.3	21.30	0.13	0	Ant 3	DLXX402AKR4X	QPSK	1	0	0 mm	back	1:1	0.894	1.000	0.894	0.457	0.457	
793.00	23330	Mid	LTE Band 14	10	21.3	21.29	0.00	0	Ant 3	DLXX402AKR4X	QPSK	25	0	0 mm	back	1:1	0.870	1.002	0.872	0.443	0.444	
793.00	23330	Mid	LTE Band 14	10	21.3	21.23	-0.19	0	Ant 3	DLXX402AKR4X	QPSK	50	0	0 mm	back	1:1	0.840	1.016	0.853	0.420	0.427	
793.00	23330	Mid	LTE Band 14	10	21.3	21.30	0.00	0	Ant 3	DLXX402AKR4X	QPSK	1	0	0 mm	top	1:1	0.517	1.000	0.517	0.201	0.201	
793.00	23330	Mid	LTE Band 14	10	21.3	21.29	0.00	0	Ant 3	DLXX402AKR4X	QPSK	25	0	0 mm	top	1:1	0.518	1.002	0.519	0.203	0.203	
793.00	23330	Mid	LTE Band 14	10	21.3	21.30	0.00	0	Ant 3	DLXX402AKR4X	QPSK	1	0	0 mm	right	1:1	0.587	1.000	0.587	0.213	0.213	
793.00	23330	Mid	LTE Band 14	10	21.3	21.29	0.01	0	Ant 3	DLXX402AKR4X	QPSK	25	0	0 mm	right	1:1	0.573	1.002	0.574	0.206	0.206	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body														
Spatial Peak								1.6 W/kg (mW/g)														
Uncontrolled Exposure/General Population								averaged over 1 gram														

Table 10-23
LTE Band 5 (Cell) Body SAR- Ant 1

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
836.50	20525	Mid	LTE Band 5 (Cell)	10	20.3	20.28	-0.02	0	Ant 1	DLXX700ZL3TG	QPSK	1	25	0 mm	back	1:1	0.873	1.005	0.877	0.451	0.453	
836.50	20525	Mid	LTE Band 5 (Cell)	10	20.3	20.29	-0.04	0	Ant 1	DLXX700ZL3TG	QPSK	25	0	0 mm	back	1:1	0.903	1.002	0.905	0.464	0.465	
836.50	20525	Mid	LTE Band 5 (Cell)	10	20.3	20.27	-0.05	0	Ant 1	DLXX700ZL3TG	QPSK	50	0	0 mm	back	1:1	0.897	1.007	0.903	0.459	0.462	
836.50	20525	Mid	LTE Band 5 (Cell)	10	20.3	20.28	0.04	0	Ant 1	DLXX700ZL3TG	QPSK	1	25	0 mm	bottom	1:1	0.411	1.005	0.413	0.163	0.164	
836.50	20525	Mid	LTE Band 5 (Cell)	10	20.3	20.29	0.06	0	Ant 1	DLXX700ZL3TG	QPSK	25	0	0 mm	bottom	1:1	0.418	1.002	0.419	0.161	0.161	
836.50	20525	Mid	LTE Band 5 (Cell)	10	20.3	20.28	0.00	0	Ant 1	DLXX700ZL3TG	QPSK	1	25	0 mm	right	1:1	0.013	1.005	0.013	0.007	0.007	
836.50	20525	Mid	LTE Band 5 (Cell)	10	20.3	20.29	0.15	0	Ant 1	DLXX700ZL3TG	QPSK	25	0	0 mm	right	1:1	0.013	1.002	0.013	0.007	0.007	
836.50	20525	Mid	LTE Band 5 (Cell)	10	20.3	20.28	-0.02	0	Ant 1	DLXX700ZL3TG	QPSK	1	25	0 mm	left	1:1	1.110	1.005	1.116	0.400	0.402	
836.50	20525	Mid	LTE Band 5 (Cell)	10	20.3	20.29	0.02	0	Ant 1	DLXX700ZL3TG	QPSK	25	0	0 mm	left	1:1	1.170	1.002	1.172	0.413	0.414	A9
836.50	20525	Mid	LTE Band 5 (Cell)	10	20.3	20.27	-0.04	0	Ant 1	DLXX700ZL3TG	QPSK	50	0	0 mm	left	1:1	1.160	1.007	1.168	0.409	0.412	
836.50	20525	Mid	LTE Band 5 (Cell)	10	20.3	20.29	0.11	0	Ant 1	DLXX700ZL3TG	QPSK	25	0	0 mm	left	1:1	1.020	1.002	1.022	0.394	0.395	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body														
Spatial Peak								1.6 W/kg (mW/g)														
Uncontrolled Exposure/General Population								averaged over 1 gram														

Note: Blue entry represents variability measurement.

Table 10-24
LTE Band 5 (Cell) Body SAR- Ant 3

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
836.50	20525	Mid	LTE Band 5 (Cell)	10	21.4	21.33	0.00	0	Ant 3	DLXX700ZL3TG	QPSK	1	49	0 mm	back	1:1	0.934	1.016	0.949	0.488	0.496	
836.50	20525	Mid	LTE Band 5 (Cell)	10	21.4	21.36	0.01	0	Ant 3	DLXX700ZL3TG	QPSK	25	25	0 mm	back	1:1	0.995	1.009	1.004	0.518	0.523	
836.50	20525	Mid	LTE Band 5 (Cell)	10	21.4	21.32	-0.01	0	Ant 3	DLXX700ZL3TG	QPSK	50	0	0 mm	back	1:1	1.030	1.019	1.050	0.535	0.545	
836.50	20525	Mid	LTE Band 5 (Cell)	10	21.4	21.33	0.08	0	Ant 3	DLXX700ZL3TG	QPSK	1	49	0 mm	top	1:1	0.575	1.016	0.584	0.221	0.225	
836.50	20525	Mid	LTE Band 5 (Cell)	10	21.4	21.36	0.02	0	Ant 3	DLXX700ZL3TG	QPSK	25	25	0 mm	top	1:1	0.620	1.009	0.626	0.237	0.239	
836.50	20525	Mid	LTE Band 5 (Cell)	10	21.4	21.33	-0.01	0	Ant 3	DLXX700ZL3TG	QPSK	1	49	0 mm	right	1:1	0.655	1.016	0.665	0.246	0.250	
836.50	20525	Mid	LTE Band 5 (Cell)	10	21.4	21.36	0.02	0	Ant 3	DLXX700ZL3TG	QPSK	25	25	0 mm	right	1:1	0.716	1.009	0.722	0.266	0.268	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body														
Spatial Peak								1.6 W/kg (mW/g)														
Uncontrolled Exposure/General Population								averaged over 1 gram														

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 140 of 234

Table 10-25
LTE Band 26 (Cell) Body SAR- Ant 1

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
819.00	26740	Low	LTE Band 26 (Cell)	10	20.3	20.30	-0.01	0	Ant 1	DLX0700ZL3TG	QPSK	1	25	0 mm	back	1:1	0.879	1.000	0.879	0.453	0.453	
831.50	26865	Mid	LTE Band 26 (Cell)	10	20.3	20.29	-0.10	0	Ant 1	DLX0700ZL3TG	QPSK	1	49	0 mm	back	1:1	0.773	1.002	0.775	0.400	0.401	
844.00	26990	High	LTE Band 26 (Cell)	10	20.3	20.29	0.11	0	Ant 1	DLX0700ZL3TG	QPSK	1	0	0 mm	back	1:1	0.766	1.002	0.768	0.394	0.395	
819.00	26740	Low	LTE Band 26 (Cell)	10	20.3	20.30	-0.02	0	Ant 1	DLX0700ZL3TG	QPSK	25	25	0 mm	back	1:1	0.871	1.000	0.871	0.447	0.447	
831.50	26865	Mid	LTE Band 26 (Cell)	10	20.3	20.22	-0.02	0	Ant 1	DLX0700ZL3TG	QPSK	25	25	0 mm	back	1:1	0.785	1.019	0.800	0.403	0.411	
844.00	26990	High	LTE Band 26 (Cell)	10	20.3	20.14	-0.02	0	Ant 1	DLX0700ZL3TG	QPSK	25	0	0 mm	back	1:1	0.744	1.038	0.772	0.382	0.397	
819.00	26740	Low	LTE Band 26 (Cell)	10	20.3	20.29	0.01	0	Ant 1	DLX0700ZL3TG	QPSK	50	0	0 mm	back	1:1	0.899	1.002	0.901	0.462	0.463	
819.00	26740	Low	LTE Band 26 (Cell)	10	20.3	20.30	0.03	0	Ant 1	DLX0700ZL3TG	QPSK	1	25	0 mm	bottom	1:1	0.365	1.000	0.365	0.144	0.144	
819.00	26740	Low	LTE Band 26 (Cell)	10	20.3	20.30	0.00	0	Ant 1	DLX0700ZL3TG	QPSK	25	25	0 mm	bottom	1:1	0.361	1.000	0.361	0.141	0.141	
819.00	26740	Low	LTE Band 26 (Cell)	10	20.3	20.30	0.15	0	Ant 1	DLX0700ZL3TG	QPSK	1	25	0 mm	right	1:1	0.006	1.000	0.006	0.003	0.003	
819.00	26740	Low	LTE Band 26 (Cell)	10	20.3	20.30	-0.06	0	Ant 1	DLX0700ZL3TG	QPSK	25	25	0 mm	right	1:1	0.005	1.000	0.005	0.003	0.003	
819.00	26740	Low	LTE Band 26 (Cell)	10	20.3	20.30	0.03	0	Ant 1	DLX0700ZL3TG	QPSK	1	25	0 mm	left	1:1	1.030	1.000	1.030	0.389	0.389	
831.50	26865	Mid	LTE Band 26 (Cell)	10	20.3	20.29	0.03	0	Ant 1	DLX0700ZL3TG	QPSK	1	49	0 mm	left	1:1	1.080	1.002	1.082	0.384	0.385	
844.00	26990	High	LTE Band 26 (Cell)	10	20.3	20.29	0.06	0	Ant 1	DLX0700ZL3TG	QPSK	1	0	0 mm	left	1:1	1.070	1.002	1.072	0.377	0.378	
819.00	26740	Low	LTE Band 26 (Cell)	10	20.3	20.30	0.01	0	Ant 1	DLX0700ZL3TG	QPSK	25	25	0 mm	left	1:1	1.030	1.000	1.030	0.386	0.386	
831.50	26865	Mid	LTE Band 26 (Cell)	10	20.3	20.22	-0.17	0	Ant 1	DLX0700ZL3TG	QPSK	25	25	0 mm	left	1:1	1.030	1.019	1.050	0.373	0.380	
844.00	26990	High	LTE Band 26 (Cell)	10	20.3	20.14	0.01	0	Ant 1	DLX0700ZL3TG	QPSK	25	0	0 mm	left	1:1	1.120	1.038	1.163	0.383	0.398	
819.00	26740	Low	LTE Band 26 (Cell)	10	20.3	20.29	0.01	0	Ant 1	DLX0700ZL3TG	QPSK	50	0	0 mm	left	1:1	1.110	1.002	1.112	0.411	0.412	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body														
Spatial Peak								1.6 W/kg (mW/g)														
Uncontrolled Exposure/General Population								averaged over 1 gram														

Table 10-26
LTE Band 26 (Cell) Body SAR- Ant 3

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
819.00	26740	Low	LTE Band 26 (Cell)	10	21.4	21.40	-0.06	0	Ant 3	DLX0700L3TG	QPSK	1	25	0 mm	back	1:1	0.980	1.000	0.980	0.504	0.504	
831.50	26865	Mid	LTE Band 26 (Cell)	10	21.4	21.39	0.01	0	Ant 3	DLX0700L3TG	QPSK	1	49	0 mm	back	1:1	1.120	1.002	1.122	0.579	0.580	
844.00	26990	High	LTE Band 26 (Cell)	10	21.4	21.39	0.03	0	Ant 3	DLX0700L3TG	QPSK	1	0	0 mm	back	1:1	1.060	1.002	1.062	0.547	0.548	
819.00	26740	Low	LTE Band 26 (Cell)	10	21.4	21.38	0.01	0	Ant 3	DLX0700L3TG	QPSK	25	25	0 mm	back	1:1	1.020	1.005	1.025	0.525	0.528	
831.50	26865	Mid	LTE Band 26 (Cell)	10	21.4	21.29	0.01	0	Ant 3	DLX0700L3TG	QPSK	25	25	0 mm	back	1:1	1.130	1.026	1.159	0.580	0.595	
844.00	26990	High	LTE Band 26 (Cell)	10	21.4	21.22	0.02	0	Ant 3	DLX0700L3TG	QPSK	25	25	0 mm	back	1:1	1.090	1.042	1.136	0.561	0.585	
819.00	26740	Low	LTE Band 26 (Cell)	10	21.4	21.36	0.02	0	Ant 3	DLX0700L3TG	QPSK	50	0	0 mm	back	1:1	1.020	1.009	1.029	0.525	0.530	
819.00	26740	Low	LTE Band 26 (Cell)	10	21.4	21.40	-0.02	0	Ant 3	DLX0700L3TG	QPSK	1	25	0 mm	top	1:1	0.464	1.000	0.464	0.186	0.186	
819.00	26740	Low	LTE Band 26 (Cell)	10	21.4	21.38	0.10	0	Ant 3	DLX0700L3TG	QPSK	25	25	0 mm	top	1:1	0.482	1.005	0.484	0.195	0.196	
819.00	26740	Low	LTE Band 26 (Cell)	10	21.4	21.40	0.01	0	Ant 3	DLX0700L3TG	QPSK	1	25	0 mm	right	1:1	1.140	1.000	1.140	0.417	0.417	
831.50	26865	Mid	LTE Band 26 (Cell)	10	21.4	21.39	0.01	0	Ant 3	DLX0700L3TG	QPSK	1	49	0 mm	right	1:1	1.020	1.002	1.022	0.384	0.385	
844.00	26990	High	LTE Band 26 (Cell)	10	21.4	21.39	0.02	0	Ant 3	DLX0700L3TG	QPSK	1	0	0 mm	right	1:1	0.968	1.002	0.970	0.362	0.363	
819.00	26740	Low	LTE Band 26 (Cell)	10	21.4	21.38	0.01	0	Ant 3	DLX0700L3TG	QPSK	25	25	0 mm	right	1:1	1.130	1.005	1.136	0.412	0.414	
831.50	26865	Mid	LTE Band 26 (Cell)	10	21.4	21.29	0.02	0	Ant 3	DLX0700L3TG	QPSK	25	25	0 mm	right	1:1	1.110	1.026	1.139	0.401	0.411	
844.00	26990	High	LTE Band 26 (Cell)	10	21.4	21.22	0.03	0	Ant 3	DLX0700L3TG	QPSK	25	25	0 mm	right	1:1	0.945	1.042	0.985	0.351	0.366	
819.00	26740	Low	LTE Band 26 (Cell)	10	21.4	21.36	-0.01	0	Ant 3	DLX0700L3TG	QPSK	50	0	0 mm	right	1:1	1.150	1.009	1.160	0.417	0.421	A10
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body														
Spatial Peak								1.6 W/kg (mW/g)														
Uncontrolled Exposure/General Population								averaged over 1 gram														

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 141 of 234

Table 10-27
LTE Band 66 (AWS) Body SAR- Ant 4A

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
1720.00	132072	Low	LTE Band 66 (AWS)	20	15.0	15.00	-0.05	0	Ant 4A	DLXX700UL3TG	QPSK	1	99	0 mm	back	1:1	0.846	1.000	0.846	0.415	0.415	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	15.0	14.80	-0.03	0	Ant 4A	DLXX700UL3TG	QPSK	1	0	0 mm	back	1:1	0.885	1.047	0.927	0.434	0.454	
1770.00	132572	High	LTE Band 66 (AWS)	20	15.0	14.86	-0.05	0	Ant 4A	DLXX700UL3TG	QPSK	1	0	0 mm	back	1:1	0.913	1.033	0.943	0.447	0.462	
1720.00	132072	Low	LTE Band 66 (AWS)	20	15.0	14.97	0.01	0	Ant 4A	DLXX700UL3TG	QPSK	50	0	0 mm	back	1:1	0.827	1.007	0.833	0.405	0.408	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	15.0	14.83	0.01	0	Ant 4A	DLXX700UL3TG	QPSK	50	25	0 mm	back	1:1	0.873	1.040	0.908	0.427	0.444	
1770.00	132572	High	LTE Band 66 (AWS)	20	15.0	14.77	0.02	0	Ant 4A	DLXX700UL3TG	QPSK	50	50	0 mm	back	1:1	0.904	1.054	0.953	0.443	0.467	
1720.00	132072	Low	LTE Band 66 (AWS)	20	15.0	14.93	0.03	0	Ant 4A	DLXX700UL3TG	QPSK	100	0	0 mm	back	1:1	0.843	1.016	0.856	0.413	0.420	
1720.00	132072	Low	LTE Band 66 (AWS)	20	15.0	15.00	0.08	0	Ant 4A	DLXX700UL3TG	QPSK	1	99	0 mm	top	1:1	0.346	1.000	0.346	0.141	0.141	
1720.00	132072	Low	LTE Band 66 (AWS)	20	15.0	14.97	-0.01	0	Ant 4A	DLXX700UL3TG	QPSK	50	0	0 mm	top	1:1	0.333	1.007	0.335	0.136	0.137	
1720.00	132072	Low	LTE Band 66 (AWS)	20	15.0	15.00	0.13	0	Ant 4A	DLXX700UL3TG	QPSK	1	99	0 mm	right	1:1	0.001	1.000	0.001	0.001	0.001	
1720.00	132072	Low	LTE Band 66 (AWS)	20	15.0	14.97	0.13	0	Ant 4A	DLXX700UL3TG	QPSK	50	0	0 mm	right	1:1	0.001	1.007	0.001	0.000	0.000	
1720.00	132072	Low	LTE Band 66 (AWS)	20	15.0	15.00	0.04	0	Ant 4A	DLXX700UL3TG	QPSK	1	99	0 mm	left	1:1	0.929	1.000	0.929	0.398	0.398	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	15.0	14.80	0.02	0	Ant 4A	DLXX700UL3TG	QPSK	1	0	0 mm	left	1:1	0.953	1.047	0.998	0.408	0.427	
1770.00	132572	High	LTE Band 66 (AWS)	20	15.0	14.86	-0.05	0	Ant 4A	DLXX700UL3TG	QPSK	1	0	0 mm	left	1:1	1.000	1.033	1.033	0.426	0.440	
1720.00	132072	Low	LTE Band 66 (AWS)	20	15.0	14.97	0.00	0	Ant 4A	DLXX700UL3TG	QPSK	50	0	0 mm	left	1:1	0.906	1.007	0.912	0.387	0.390	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	15.0	14.83	0.19	0	Ant 4A	DLXX700UL3TG	QPSK	50	25	0 mm	left	1:1	0.943	1.040	0.981	0.402	0.418	
1770.00	132572	High	LTE Band 66 (AWS)	20	15.0	14.77	0.00	0	Ant 4A	DLXX700UL3TG	QPSK	50	50	0 mm	left	1:1	0.975	1.054	1.028	0.414	0.436	
1720.00	132072	Low	LTE Band 66 (AWS)	20	15.0	14.93	0.03	0	Ant 4A	DLXX700UL3TG	QPSK	100	0	0 mm	left	1:1	0.927	1.016	0.942	0.397	0.403	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram														

Table 10-28
LTE Band 66 (AWS) Body SAR- Ant 4B

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
1720.00	132072	Low	LTE Band 66 (AWS)	20	14.75	14.50	0.00	0	Ant 4B	DLXX7002L3TG	QPSK	1	0	0 mm	back	1:1	0.867	1.059	0.918	0.374	0.396	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	14.75	14.47	0.01	0	Ant 4B	DLXX7002L3TG	QPSK	1	0	0 mm	back	1:1	0.889	1.067	0.949	0.384	0.410	
1770.00	132572	High	LTE Band 66 (AWS)	20	14.75	14.42	0.00	0	Ant 4B	DLXX7002L3TG	QPSK	1	0	0 mm	back	1:1	0.917	1.079	0.989	0.397	0.428	
1720.00	132072	Low	LTE Band 66 (AWS)	20	14.75	14.43	0.05	0	Ant 4B	DLXX7002L3TG	QPSK	50	0	0 mm	back	1:1	0.861	1.076	0.926	0.370	0.398	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	14.75	14.36	-0.03	0	Ant 4B	DLXX7002L3TG	QPSK	50	0	0 mm	back	1:1	0.885	1.094	0.968	0.381	0.417	
1770.00	132572	High	LTE Band 66 (AWS)	20	14.75	14.30	0.03	0	Ant 4B	DLXX7002L3TG	QPSK	50	0	0 mm	back	1:1	0.910	1.109	1.009	0.393	0.436	
1720.00	132072	Low	LTE Band 66 (AWS)	20	14.75	14.42	0.00	0	Ant 4B	DLXX7002L3TG	QPSK	100	0	0 mm	back	1:1	0.878	1.079	0.947	0.378	0.408	
1720.00	132072	Low	LTE Band 66 (AWS)	20	14.75	14.50	-0.02	0	Ant 4B	DLXX7002L3TG	QPSK	1	0	0 mm	top	1:1	0.640	1.059	0.678	0.269	0.285	
1720.00	132072	Low	LTE Band 66 (AWS)	20	14.75	14.43	-0.01	0	Ant 4B	DLXX7002L3TG	QPSK	50	0	0 mm	top	1:1	0.626	1.076	0.674	0.262	0.282	
1720.00	132072	Low	LTE Band 66 (AWS)	20	14.75	14.50	-0.17	0	Ant 4B	DLXX7002L3TG	QPSK	1	0	0 mm	right	1:1	0.009	1.059	0.010	0.005	0.005	
1720.00	132072	Low	LTE Band 66 (AWS)	20	14.75	14.43	0.15	0	Ant 4B	DLXX7002L3TG	QPSK	50	0	0 mm	right	1:1	0.008	1.076	0.009	0.004	0.004	
1720.00	132072	Low	LTE Band 66 (AWS)	20	14.75	14.50	-0.05	0	Ant 4B	DLXX7002L3TG	QPSK	1	0	0 mm	left	1:1	0.048	1.059	0.051	0.022	0.023	
1720.00	132072	Low	LTE Band 66 (AWS)	20	14.75	14.43	0.10	0	Ant 4B	DLXX7002L3TG	QPSK	50	0	0 mm	left	1:1	0.045	1.076	0.048	0.020	0.022	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram														

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 142 of 234

Table 10-29
LTE Band 66 (AWS) Body SAR- Ant 2A

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
1720.00	132072	Low	LTE Band 66 (AWS)	20	14.7	14.60	-0.02	0	Ant 2A	DLX0700UL3TG	QPSK	1	0	0 mm	back	1:1	1.080	1.023	1.105	0.531		
1745.00	132322	Mid	LTE Band 66 (AWS)	20	14.7	14.70	-0.04	0	Ant 2A	DLX0700UL3TG	QPSK	1	0	0 mm	back	1:1	1.080	1.000	1.080	0.531		
1770.00	132572	High	LTE Band 66 (AWS)	20	14.7	14.63	-0.01	0	Ant 2A	DLX0700UL3TG	QPSK	1	0	0 mm	back	1:1	1.130	1.016	1.148	0.545	0.554	A11
1720.00	132072	Low	LTE Band 66 (AWS)	20	14.7	14.62	-0.03	0	Ant 2A	DLX0700UL3TG	QPSK	50	25	0 mm	back	1:1	1.070	1.019	1.090	0.514	0.524	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	14.7	14.66	-0.01	0	Ant 2A	DLX0700UL3TG	QPSK	50	0	0 mm	back	1:1	1.070	1.009	1.080	0.525	0.530	
1770.00	132572	High	LTE Band 66 (AWS)	20	14.7	14.58	-0.01	0	Ant 2A	DLX0700UL3TG	QPSK	50	50	0 mm	back	1:1	1.050	1.028	1.079	0.506	0.520	
1720.00	132072	Low	LTE Band 66 (AWS)	20	14.7	14.65	-0.03	0	Ant 2A	DLX0700UL3TG	QPSK	100	0	0 mm	back	1:1	1.050	1.012	1.063	0.515	0.521	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	14.7	14.70	-0.01	0	Ant 2A	DLX0700UL3TG	QPSK	1	0	0 mm	bottom	1:1	0.277	1.000	0.277	0.113	0.113	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	14.7	14.66	0.06	0	Ant 2A	DLX0700UL3TG	QPSK	50	0	0 mm	bottom	1:1	0.278	1.009	0.281	0.113	0.114	
1720.00	132072	Low	LTE Band 66 (AWS)	20	14.7	14.60	0.03	0	Ant 2A	DLX0700UL3TG	QPSK	1	0	0 mm	right	1:1	0.756	1.023	0.773	0.331	0.339	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	14.7	14.70	-0.01	0	Ant 2A	DLX0700UL3TG	QPSK	1	0	0 mm	right	1:1	0.878	1.000	0.878	0.372	0.372	
1770.00	132572	High	LTE Band 66 (AWS)	20	14.7	14.63	0.00	0	Ant 2A	DLX0700UL3TG	QPSK	1	0	0 mm	right	1:1	0.811	1.016	0.824	0.351	0.357	
1720.00	132072	Low	LTE Band 66 (AWS)	20	14.7	14.62	0.02	0	Ant 2A	DLX0700UL3TG	QPSK	50	25	0 mm	right	1:1	0.733	1.019	0.747	0.321	0.327	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	14.7	14.66	0.00	0	Ant 2A	DLX0700UL3TG	QPSK	50	0	0 mm	right	1:1	0.869	1.009	0.877	0.366	0.369	
1770.00	132572	High	LTE Band 66 (AWS)	20	14.7	14.58	0.00	0	Ant 2A	DLX0700UL3TG	QPSK	50	50	0 mm	right	1:1	0.782	1.028	0.804	0.337	0.346	
1720.00	132072	Low	LTE Band 66 (AWS)	20	14.7	14.65	0.01	0	Ant 2A	DLX0700UL3TG	QPSK	100	0	0 mm	right	1:1	0.848	1.012	0.858	0.357	0.361	
1770.00	132572	High	LTE Band 66 (AWS)	20	14.7	14.63	-0.01	0	Ant 2A	DLX0700UL3TG	QPSK	1	0	0 mm	back	1:1	1.110	1.016	1.128	0.546	0.555	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body														
Spatial Peak								1.6 W/kg (mW/g)														
Uncontrolled Exposure/General Population								averaged over 1 gram														

Note: Blue entry represents variability measurement.

Table 10-30
LTE Band 66 (AWS) Body SAR- Ant 2B

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
1720.00	132072	Low	LTE Band 66 (AWS)	20	14.3	14.29	0.07	0	Ant 2B	DLX0700UL3TG	QPSK	1	99	0 mm	back	1:1	0.859	1.002	0.861	0.370	0.371	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	14.3	14.30	-0.01	0	Ant 2B	DLX0700UL3TG	QPSK	1	0	0 mm	back	1:1	0.878	1.000	0.878	0.378	0.378	
1770.00	132572	High	LTE Band 66 (AWS)	20	14.3	14.05	0.13	0	Ant 2B	DLX0700UL3TG	QPSK	1	0	0 mm	back	1:1	0.882	1.059	0.934	0.380	0.402	
1720.00	132072	Low	LTE Band 66 (AWS)	20	14.3	14.15	0.02	0	Ant 2B	DLX0700UL3TG	QPSK	50	50	0 mm	back	1:1	0.844	1.035	0.874	0.364	0.377	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	14.3	14.21	-0.03	0	Ant 2B	DLX0700UL3TG	QPSK	50	0	0 mm	back	1:1	0.858	1.021	0.876	0.370	0.378	
1770.00	132572	High	LTE Band 66 (AWS)	20	14.3	14.02	-0.01	0	Ant 2B	DLX0700UL3TG	QPSK	50	0	0 mm	back	1:1	0.871	1.067	0.929	0.373	0.398	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	14.3	14.20	0.00	0	Ant 2B	DLX0700UL3TG	QPSK	100	0	0 mm	back	1:1	0.855	1.023	0.875	0.369	0.377	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	14.3	14.30	0.00	0	Ant 2B	DLX0700UL3TG	QPSK	1	0	0 mm	bottom	1:1	0.524	1.000	0.524	0.218	0.218	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	14.3	14.21	0.01	0	Ant 2B	DLX0700UL3TG	QPSK	50	0	0 mm	bottom	1:1	0.520	1.021	0.531	0.216	0.221	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	14.3	14.30	0.07	0	Ant 2B	DLX0700UL3TG	QPSK	1	0	0 mm	right	1:1	0.036	1.000	0.036	0.017	0.017	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	14.3	14.21	0.11	0	Ant 2B	DLX0700UL3TG	QPSK	50	0	0 mm	right	1:1	0.036	1.021	0.037	0.017	0.017	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body														
Spatial Peak								1.6 W/kg (mW/g)														
Uncontrolled Exposure/General Population								averaged over 1 gram														

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 143 of 234

Table 10-31
LTE Band 25 (PCS) Body SAR – Ant 4A

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.3	15.29	-0.03	0	Ant 4A	DLXX700UL3TG	QPSK	1	0	0 mm	back	1:1	0.921	1.002	0.923	0.465	0.466	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	15.3	15.11	0.00	0	Ant 4A	DLXX700UL3TG	QPSK	1	0	0 mm	back	1:1	0.874	1.045	0.913	0.441	0.461	
1905.00	26590	High	LTE Band 25 (PCS)	20	15.3	15.22	0.00	0	Ant 4A	DLXX700UL3TG	QPSK	1	99	0 mm	back	1:1	0.842	1.019	0.858	0.424	0.432	
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.3	15.18	0.02	0	Ant 4A	DLXX700UL3TG	QPSK	50	0	0 mm	back	1:1	0.898	1.028	0.923	0.454	0.467	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	15.3	15.11	-0.03	0	Ant 4A	DLXX700UL3TG	QPSK	50	0	0 mm	back	1:1	0.965	1.045	1.008	0.484	0.506	
1905.00	26590	High	LTE Band 25 (PCS)	20	15.3	15.16	-0.01	0	Ant 4A	DLXX700UL3TG	QPSK	50	0	0 mm	back	1:1	0.971	1.033	1.003	0.482	0.498	
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.3	15.14	-0.03	0	Ant 4A	DLXX700UL3TG	QPSK	100	0	0 mm	back	1:1	0.979	1.038	1.016	0.489	0.508	
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.3	15.29	0.02	0	Ant 4A	DLXX700UL3TG	QPSK	1	0	0 mm	top	1:1	0.469	1.002	0.470	0.180	0.180	
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.3	15.18	0.01	0	Ant 4A	DLXX700UL3TG	QPSK	50	0	0 mm	top	1:1	0.461	1.028	0.474	0.177	0.182	
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.3	15.29	0.10	0	Ant 4A	DLXX700UL3TG	QPSK	1	0	0 mm	right	1:1	0.001	1.002	0.001	0.001	0.001	
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.3	15.18	0.19	0	Ant 4A	DLXX700UL3TG	QPSK	50	0	0 mm	right	1:1	0.002	1.028	0.002	0.001	0.001	
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.3	15.29	0.01	0	Ant 4A	DLXX700UL3TG	QPSK	1	0	0 mm	left	1:1	0.982	1.002	0.984	0.423	0.424	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	15.3	15.11	0.02	0	Ant 4A	DLXX700UL3TG	QPSK	1	0	0 mm	left	1:1	0.914	1.045	0.955	0.391	0.409	
1905.00	26590	High	LTE Band 25 (PCS)	20	15.3	15.22	0.01	0	Ant 4A	DLXX700UL3TG	QPSK	1	99	0 mm	left	1:1	0.898	1.019	0.915	0.382	0.389	
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.3	15.18	-0.02	0	Ant 4A	DLXX700UL3TG	QPSK	50	0	0 mm	left	1:1	0.937	1.028	0.963	0.403	0.414	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	15.3	15.11	-0.05	0	Ant 4A	DLXX700UL3TG	QPSK	50	0	0 mm	left	1:1	0.910	1.045	0.951	0.389	0.407	
1905.00	26590	High	LTE Band 25 (PCS)	20	15.3	15.16	0.02	0	Ant 4A	DLXX700UL3TG	QPSK	50	0	0 mm	left	1:1	0.907	1.033	0.937	0.386	0.399	
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.3	15.14	-0.02	0	Ant 4A	DLXX700UL3TG	QPSK	100	0	0 mm	left	1:1	0.904	1.038	0.938	0.386	0.401	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body														
Spatial Peak								1.6 W/kg (mW/g)														
Uncontrolled Exposure/General Population								averaged over 1 gram														

Table 10-32
LTE Band 25 (PCS) Body SAR – Ant 4B

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
1860.00	26140	Low	LTE Band 25 (PCS)	20	14.2	14.11	-0.02	0	Ant 4B	DLXX700UL3TG	QPSK	1	0	0 mm	back	1:1	0.874	1.021	0.892	0.371	0.379	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	14.2	14.20	-0.16	0	Ant 4B	DLXX700UL3TG	QPSK	1	0	0 mm	back	1:1	0.900	1.000	0.900	0.383	0.383	
1905.00	26590	High	LTE Band 25 (PCS)	20	14.2	14.19	-0.01	0	Ant 4B	DLXX700UL3TG	QPSK	1	99	0 mm	back	1:1	0.899	1.002	0.901	0.383	0.384	
1860.00	26140	Low	LTE Band 25 (PCS)	20	14.2	14.08	0.00	0	Ant 4B	DLXX700UL3TG	QPSK	50	0	0 mm	back	1:1	0.861	1.028	0.885	0.365	0.375	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	14.2	14.10	0.03	0	Ant 4B	DLXX700UL3TG	QPSK	50	0	0 mm	back	1:1	0.890	1.023	0.910	0.378	0.387	
1905.00	26590	High	LTE Band 25 (PCS)	20	14.2	14.18	0.00	0	Ant 4B	DLXX700UL3TG	QPSK	50	50	0 mm	back	1:1	0.911	1.005	0.916	0.387	0.389	
1905.00	26590	High	LTE Band 25 (PCS)	20	14.2	14.11	0.01	0	Ant 4B	DLXX700UL3TG	QPSK	100	0	0 mm	back	1:1	0.942	1.021	0.962	0.400	0.408	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	14.2	14.20	-0.01	0	Ant 4B	DLXX700UL3TG	QPSK	1	0	0 mm	top	1:1	0.671	1.000	0.671	0.299	0.299	
1905.00	26590	High	LTE Band 25 (PCS)	20	14.2	14.18	0.00	0	Ant 4B	DLXX700UL3TG	QPSK	50	50	0 mm	top	1:1	0.625	1.005	0.628	0.277	0.278	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	14.2	14.20	0.09	0	Ant 4B	DLXX700UL3TG	QPSK	1	0	0 mm	right	1:1	0.012	1.000	0.012	0.005	0.005	
1905.00	26590	High	LTE Band 25 (PCS)	20	14.2	14.18	0.04	0	Ant 4B	DLXX700UL3TG	QPSK	50	50	0 mm	right	1:1	0.015	1.005	0.015	0.006	0.006	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	14.2	14.20	-0.04	0	Ant 4B	DLXX700UL3TG	QPSK	1	0	0 mm	left	1:1	0.060	1.000	0.060	0.025	0.025	
1905.00	26590	High	LTE Band 25 (PCS)	20	14.2	14.18	-0.02	0	Ant 4B	DLXX700UL3TG	QPSK	50	50	0 mm	left	1:1	0.065	1.005	0.065	0.028	0.028	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body														
Spatial Peak								1.6 W/kg (mW/g)														
Uncontrolled Exposure/General Population								averaged over 1 gram														

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 144 of 234

Table 10-33
LTE Band 25 (PCS) Body SAR – Ant 2A

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
1860.00	26140	Low	LTE Band 25 (PCS)	20	14.0	13.99	-0.03	0	Ant 2A	DLXx700UL3TG	QPSK	1	0	0 mm	back	1:1	0.991	1.002	0.993	0.472	0.473	A12
1882.50	26365	Mid	LTE Band 25 (PCS)	20	14.0	14.00	0.04	0	Ant 2A	DLXx700UL3TG	QPSK	1	0	0 mm	back	1:1	0.970	1.000	0.970	0.459	0.459	
1905.00	26590	High	LTE Band 25 (PCS)	20	14.0	13.90	-0.01	0	Ant 2A	DLXx700UL3TG	QPSK	1	0	0 mm	back	1:1	0.975	1.023	0.997	0.462	0.473	
1860.00	26140	Low	LTE Band 25 (PCS)	20	14.0	13.89	0.00	0	Ant 2A	DLXx700UL3TG	QPSK	50	0	0 mm	back	1:1	0.958	1.026	0.983	0.455	0.467	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	14.0	13.90	0.01	0	Ant 2A	DLXx700UL3TG	QPSK	50	0	0 mm	back	1:1	0.957	1.023	0.979	0.452	0.462	
1905.00	26590	High	LTE Band 25 (PCS)	20	14.0	13.85	-0.02	0	Ant 2A	DLXx700UL3TG	QPSK	50	0	0 mm	back	1:1	0.956	1.035	0.989	0.452	0.468	
1860.00	26140	Low	LTE Band 25 (PCS)	20	14.0	13.89	0.00	0	Ant 2A	DLXx700UL3TG	QPSK	100	0	0 mm	back	1:1	0.961	1.026	0.986	0.457	0.469	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	14.0	14.00	-0.02	0	Ant 2A	DLXx700UL3TG	QPSK	1	0	0 mm	bottom	1:1	0.308	1.000	0.308	0.110	0.110	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	14.0	13.90	0.01	0	Ant 2A	DLXx700UL3TG	QPSK	50	0	0 mm	bottom	1:1	0.307	1.023	0.314	0.109	0.112	
1860.00	26140	Low	LTE Band 25 (PCS)	20	14.0	13.99	-0.02	0	Ant 2A	DLXx700UL3TG	QPSK	1	0	0 mm	right	1:1	0.864	1.002	0.866	0.343	0.344	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	14.0	14.00	0.01	0	Ant 2A	DLXx700UL3TG	QPSK	1	0	0 mm	right	1:1	0.865	1.000	0.865	0.342	0.342	
1905.00	26590	High	LTE Band 25 (PCS)	20	14.0	13.90	-0.01	0	Ant 2A	DLXx700UL3TG	QPSK	1	0	0 mm	right	1:1	0.880	1.023	0.900	0.345	0.353	
1860.00	26140	Low	LTE Band 25 (PCS)	20	14.0	13.89	0.01	0	Ant 2A	DLXx700UL3TG	QPSK	50	0	0 mm	right	1:1	0.841	1.026	0.863	0.334	0.343	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	14.0	13.90	-0.01	0	Ant 2A	DLXx700UL3TG	QPSK	50	0	0 mm	right	1:1	0.851	1.023	0.871	0.336	0.344	
1905.00	26590	High	LTE Band 25 (PCS)	20	14.0	13.85	0.00	0	Ant 2A	DLXx700UL3TG	QPSK	50	0	0 mm	right	1:1	0.860	1.035	0.890	0.338	0.350	
1860.00	26140	Low	LTE Band 25 (PCS)	20	14.0	13.89	-0.03	0	Ant 2A	DLXx700UL3TG	QPSK	100	0	0 mm	right	1:1	0.849	1.026	0.871	0.340	0.349	
1860.00	26140	Low	LTE Band 25 (PCS)	20	14.0	13.99	-0.17	0	Ant 2A	DLXx700UL3TG	QPSK	1	0	0 mm	back	1:1	0.839	1.002	0.841	0.408	0.409	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body														
Spatial Peak								1.6 W/kg (mW/g)														
Uncontrolled Exposure/General Population								averaged over 1 gram														

Note: Blue entry represents variability measurement.

Table 10-34
LTE Band 25 (PCS) Body SAR – Ant 2B

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
1860.00	26140	Low	LTE Band 25 (PCS)	20	13.7	13.62	0.00	0	Ant 2B	DLXX700ZL3TG	QPSK	1	99	0 mm	back	1:1	0.847	1.019	0.863	0.361	0.368	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	13.7	13.66	0.00	0	Ant 2B	DLXX700ZL3TG	QPSK	1	0	0 mm	back	1:1	0.857	1.009	0.865	0.365	0.368	
1905.00	26590	High	LTE Band 25 (PCS)	20	13.7	13.40	0.00	0	Ant 2B	DLXX700ZL3TG	QPSK	1	0	0 mm	back	1:1	0.877	1.072	0.940	0.372	0.399	
1860.00	26140	Low	LTE Band 25 (PCS)	20	13.7	13.52	0.00	0	Ant 2B	DLXX700ZL3TG	QPSK	50	50	0 mm	back	1:1	0.845	1.042	0.880	0.360	0.375	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	13.7	13.57	0.01	0	Ant 2B	DLXX700ZL3TG	QPSK	50	0	0 mm	back	1:1	0.862	1.030	0.888	0.366	0.377	
1905.00	26590	High	LTE Band 25 (PCS)	20	13.7	13.42	0.01	0	Ant 2B	DLXX700ZL3TG	QPSK	50	0	0 mm	back	1:1	0.895	1.067	0.955	0.378	0.403	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	13.7	13.56	0.01	0	Ant 2B	DLXX700ZL3TG	QPSK	100	0	0 mm	back	1:1	0.861	1.033	0.889	0.366	0.378	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	13.7	13.66	0.02	0	Ant 2B	DLXX700ZL3TG	QPSK	1	0	0 mm	bottom	1:1	0.620	1.009	0.626	0.247	0.249	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	13.7	13.57	0.00	0	Ant 2B	DLXX700ZL3TG	QPSK	50	0	0 mm	bottom	1:1	0.617	1.030	0.636	0.244	0.251	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	13.7	13.66	-0.03	0	Ant 2B	DLXX700ZL3TG	QPSK	1	0	0 mm	right	1:1	0.049	1.009	0.049	0.020	0.020	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	13.7	13.57	0.02	0	Ant 2B	DLXX700ZL3TG	QPSK	50	0	0 mm	right	1:1	0.049	1.030	0.050	0.019	0.020	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body														
Spatial Peak								1.6 W/kg (mW/g)														
Uncontrolled Exposure/General Population								averaged over 1 gram														

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 145 of 234

Table 10-35
LTE Band 30 Body SAR – Ant 4A

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
2310.00	27710	Mid	LTE Band 30	10	13.5	13.50	0.07	0	Ant 4A	DLXX7007L3TG	QPSK	1	49	0 mm	back	1:1	0.886	1.000	0.886	0.408	0.408	
2310.00	27710	Mid	LTE Band 30	10	13.5	13.50	0.08	0	Ant 4A	DLXX7007L3TG	QPSK	25	25	0 mm	back	1:1	0.882	1.000	0.882	0.406	0.406	
2310.00	27710	Mid	LTE Band 30	10	13.5	13.42	0.09	0	Ant 4A	DLXX7007L3TG	QPSK	50	0	0 mm	back	1:1	0.891	1.019	0.908	0.410	0.418	
2310.00	27710	Mid	LTE Band 30	10	13.5	13.50	0.01	0	Ant 4A	DLXX7007L3TG	QPSK	1	49	0 mm	top	1:1	0.398	1.000	0.398	0.118	0.118	
2310.00	27710	Mid	LTE Band 30	10	13.5	13.50	0.06	0	Ant 4A	DLXX7007L3TG	QPSK	25	25	0 mm	top	1:1	0.390	1.000	0.390	0.116	0.116	
2310.00	27710	Mid	LTE Band 30	10	13.5	13.50	0.03	0	Ant 4A	DLXX7007L3TG	QPSK	1	49	0 mm	right	1:1	0.002	1.000	0.002	0.000	0.000	
2310.00	27710	Mid	LTE Band 30	10	13.5	13.50	0.14	0	Ant 4A	DLXX7007L3TG	QPSK	25	25	0 mm	right	1:1	0.002	1.000	0.002	0.001	0.001	
2310.00	27710	Mid	LTE Band 30	10	13.5	13.50	0.05	0	Ant 4A	DLXX7007L3TG	QPSK	1	49	0 mm	left	1:1	0.554	1.000	0.554	0.205	0.205	
2310.00	27710	Mid	LTE Band 30	10	13.5	13.50	0.05	0	Ant 4A	DLXX7007L3TG	QPSK	25	25	0 mm	left	1:1	0.550	1.000	0.550	0.203	0.203	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram														

Table 10-36
LTE Band 30 Body SAR – Ant 4B

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
2310.00	27710	Mid	LTE Band 30	10	13.7	13.20	0.02	0	Ant 4B	DLXX7007L3TG	QPSK	1	49	0 mm	back	1:1	0.431	1.122	0.484	0.175	0.196	
2310.00	27710	Mid	LTE Band 30	10	13.7	13.18	0.03	0	Ant 4B	DLXX7007L3TG	QPSK	25	25	0 mm	back	1:1	0.418	1.127	0.471	0.169	0.190	
2310.00	27710	Mid	LTE Band 30	10	13.7	13.20	-0.07	0	Ant 4B	DLXX7007L3TG	QPSK	1	49	0 mm	top	1:1	0.710	1.122	0.797	0.261	0.293	
2310.00	27710	Mid	LTE Band 30	10	13.7	13.18	-0.02	0	Ant 4B	DLXX7007L3TG	QPSK	25	25	0 mm	top	1:1	0.698	1.127	0.787	0.256	0.289	
2310.00	27710	Mid	LTE Band 30	10	13.7	13.20	0.13	0	Ant 4B	DLXX7007L3TG	QPSK	1	49	0 mm	right	1:1	0.016	1.122	0.018	0.007	0.008	
2310.00	27710	Mid	LTE Band 30	10	13.7	13.18	-0.20	0	Ant 4B	DLXX7007L3TG	QPSK	25	25	0 mm	right	1:1	0.016	1.127	0.018	0.007	0.008	
2310.00	27710	Mid	LTE Band 30	10	13.7	13.20	0.05	0	Ant 4B	DLXX7007L3TG	QPSK	1	49	0 mm	left	1:1	0.044	1.122	0.049	0.018	0.020	
2310.00	27710	Mid	LTE Band 30	10	13.7	13.18	0.07	0	Ant 4B	DLXX7007L3TG	QPSK	25	25	0 mm	left	1:1	0.042	1.127	0.047	0.017	0.019	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram														

Table 10-37
LTE Band 30 Body SAR – Ant 2A

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
2310.00	27710	Mid	LTE Band 30	10	12.6	12.60	0.04	0	Ant 2A	DLXX402AKR4X	QPSK	1	49	0 mm	back	1:1	0.727	1.000	0.727	0.355	0.355	
2310.00	27710	Mid	LTE Band 30	10	12.6	12.58	-0.01	0	Ant 2A	DLXX402AKR4X	QPSK	25	25	0 mm	back	1:1	0.720	1.005	0.724	0.351	0.353	
2310.00	27710	Mid	LTE Band 30	10	12.6	12.51	0.00	0	Ant 2A	DLXX402AKR4X	QPSK	50	0	0 mm	back	1:1	0.710	1.021	0.725	0.346	0.353	
2310.00	27710	Mid	LTE Band 30	10	12.6	12.60	-0.01	0	Ant 2A	DLXX402AKR4X	QPSK	1	49	0 mm	bottom	1:1	0.333	1.000	0.333	0.104	0.104	
2310.00	27710	Mid	LTE Band 30	10	12.6	12.58	-0.02	0	Ant 2A	DLXX402AKR4X	QPSK	25	25	0 mm	bottom	1:1	0.327	1.005	0.329	0.102	0.103	
2310.00	27710	Mid	LTE Band 30	10	12.6	12.60	-0.11	0	Ant 2A	DLXX402AKR4X	QPSK	1	49	0 mm	right	1:1	0.686	1.000	0.686	0.258	0.258	
2310.00	27710	Mid	LTE Band 30	10	12.6	12.58	0.10	0	Ant 2A	DLXX402AKR4X	QPSK	25	25	0 mm	right	1:1	0.712	1.005	0.716	0.255	0.256	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram														

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 146 of 234

Table 10-38
LTE Band 30 Body SAR – Ant 2B

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
2310.00	27710	Mid	LTE Band 30	10	13.4	12.90	-0.11	0	Ant 2B	DLXX402AKR4X	QPSK	1	49	0 mm	back	1:1	0.975	1.122	1.094	0.358	0.402	A13
2310.00	27710	Mid	LTE Band 30	10	13.4	12.85	-0.17	0	Ant 2B	DLXX402AKR4X	QPSK	25	25	0 mm	back	1:1	0.970	1.135	1.101	0.356	0.404	
2310.00	27710	Mid	LTE Band 30	10	13.4	12.83	-0.19	0	Ant 2B	DLXX402AKR4X	QPSK	50	0	0 mm	back	1:1	0.954	1.140	1.088	0.350	0.399	
2310.00	27710	Mid	LTE Band 30	10	13.4	12.90	0.05	0	Ant 2B	DLXX402AKR4X	QPSK	1	49	0 mm	bottom	1:1	0.541	1.122	0.607	0.202	0.227	
2310.00	27710	Mid	LTE Band 30	10	13.4	12.85	0.02	0	Ant 2B	DLXX402AKR4X	QPSK	25	25	0 mm	bottom	1:1	0.541	1.135	0.614	0.202	0.229	
2310.00	27710	Mid	LTE Band 30	10	13.4	12.90	0.13	0	Ant 2B	DLXX402AKR4X	QPSK	1	49	0 mm	right	1:1	0.056	1.122	0.063	0.023	0.026	
2310.00	27710	Mid	LTE Band 30	10	13.4	12.85	0.05	0	Ant 2B	DLXX402AKR4X	QPSK	25	25	0 mm	right	1:1	0.055	1.135	0.062	0.022	0.025	
2310.00	27710	Mid	LTE Band 30	10	13.4	12.90	-0.18	0	Ant 2B	DLXX402AKR4X	QPSK	1	49	0 mm	back	1:1	0.959	1.122	1.076	0.357	0.401	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body														
Spatial Peak								1.6 W/kg (mW/g)														
Uncontrolled Exposure/General Population								averaged over 1 gram														

Note: Blue entry represents variability measurement.

Table 10-39
LTE Band 7 Body SAR – Ant 4A

MEASUREMENT RESULTS																									
1 CC Uplink 2 CC Uplink		Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
			MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
1 CC Uplink	N/A	2510.00	20850	Low	LTE Band 7	20	12.0	12.00	0.04	0	Ant 4A	DLXX700L3TG	QPSK	1	0	0 mm	back	1:1	0.914	1.000	0.914	0.391	0.391		
1 CC Uplink	N/A	2535.00	21100	Md	LTE Band 7	20	12.0	11.72	0.08	0	Ant 4A	DLXX700L3TG	QPSK	1	0	0 mm	back	1:1	0.994	1.067	1.061	0.424	0.452		
1 CC Uplink	N/A	2560.00	21350	High	LTE Band 7	20	12.0	11.87	0.12	0	Ant 4A	DLXX700L3TG	QPSK	1	0	0 mm	back	1:1	0.961	1.030	1.010	0.415	0.427		
1 CC Uplink	N/A	2510.00	20850	Low	LTE Band 7	20	12.0	11.91	0.10	0	Ant 4A	DLXX700L3TG	QPSK	50	0	0 mm	back	1:1	0.922	1.021	0.941	0.393	0.401		
1 CC Uplink	N/A	2535.00	21100	Md	LTE Band 7	20	12.0	11.68	0.07	0	Ant 4A	DLXX700L3TG	QPSK	50	0	0 mm	back	1:1	1.000	1.076	1.076	0.425	0.457		
2 CC Uplink	PCC	2535.00	21100	Md	LTE Band 7	20	12.0	11.89	0.03	0	Ant 4A	DLXX700L3TG	QPSK	50	0	0 mm	back	1:1	1.060	1.026	1.088	0.433	0.444		
2 CC Uplink	SCC	2515.20	20902	Md								QPSK	50	50											
1 CC Uplink	N/A	2560.00	21350	High	LTE Band 7	20	12.0	11.86	0.07	0	Ant 4A	DLXX700L3TG	QPSK	50	0	0 mm	back	1:1	0.976	1.033	1.008	0.412	0.426		
1 CC Uplink	N/A	2510.00	20850	Low	LTE Band 7	20	12.0	11.89	-0.01	0	Ant 4A	DLXX700L3TG	QPSK	100	0	0 mm	back	1:1	0.972	1.026	0.997	0.415	0.426		
1 CC Uplink	N/A	2510.00	20850	Low	LTE Band 7	20	12.0	12.00	-0.06	0	Ant 4A	DLXX700L3TG	QPSK	1	0	0 mm	top	1:1	0.295	1.000	0.295	0.086	0.086		
1 CC Uplink	N/A	2510.00	20850	Low	LTE Band 7	20	12.0	11.91	0.00	0	Ant 4A	DLXX700L3TG	QPSK	50	0	0 mm	top	1:1	0.295	1.021	0.301	0.087	0.089		
1 CC Uplink	N/A	2510.00	20850	Low	LTE Band 7	20	12.0	12.00	0.20	0	Ant 4A	DLXX700L3TG	QPSK	1	0	0 mm	right	1:1	0.003	1.000	0.003	0.001	0.001		
1 CC Uplink	N/A	2510.00	20850	Low	LTE Band 7	20	12.0	11.91	0.19	0	Ant 4A	DLXX700L3TG	QPSK	50	0	0 mm	right	1:1	0.002	1.021	0.002	0.001	0.001		
1 CC Uplink	N/A	2510.00	20850	Low	LTE Band 7	20	12.0	12.00	-0.06	0	Ant 4A	DLXX700L3TG	QPSK	1	0	0 mm	left	1:1	0.830	1.000	0.830	0.289	0.289		
1 CC Uplink	N/A	2535.00	21100	Md	LTE Band 7	20	12.0	11.72	0.02	0	Ant 4A	DLXX700L3TG	QPSK	1	0	0 mm	left	1:1	0.712	1.067	0.760	0.250	0.267		
1 CC Uplink	N/A	2560.00	21350	High	LTE Band 7	20	12.0	11.87	0.13	0	Ant 4A	DLXX700L3TG	QPSK	1	0	0 mm	left	1:1	0.617	1.030	0.636	0.216	0.222		
1 CC Uplink	N/A	2510.00	20850	Low	LTE Band 7	20	12.0	11.91	-0.05	0	Ant 4A	DLXX700L3TG	QPSK	50	0	0 mm	left	1:1	0.809	1.021	0.826	0.283	0.289		
1 CC Uplink	N/A	2535.00	21100	Md	LTE Band 7	20	12.0	11.68	0.15	0	Ant 4A	DLXX700L3TG	QPSK	50	0	0 mm	left	1:1	0.704	1.076	0.758	0.248	0.267		
1 CC Uplink	N/A	2560.00	21350	High	LTE Band 7	20	12.0	11.86	-0.13	0	Ant 4A	DLXX700L3TG	QPSK	50	0	0 mm	left	1:1	0.624	1.033	0.645	0.215	0.222		
1 CC Uplink	N/A	2510.00	20850	Low	LTE Band 7	20	12.0	11.89	0.18	0	Ant 4A	DLXX700L3TG	QPSK	100	0	0 mm	left	1:1	0.808	1.026	0.829	0.283	0.290		
ANSI / IEEE C95.1 1992 - SAFETY LIMIT												Body													
Spatial Peak												1.6 W/kg (mW/g)													
Uncontrolled Exposure/General Population												averaged over 1 gram													

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 147 of 234

Table 10-40
LTE Band 7 Body SAR – Ant 4B

MEASUREMENT RESULTS																								
1 CC Uplink 2 CC Uplink	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Dn [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
		MHz	Ch.															(W/kg)	(W/kg)	(W/kg)				
1 CC Uplink	N/A	2510.00	20850	Low	LTE Band 7	20	12.3	11.93	-0.17	0	Ant 4B	DLXX7007L3TG	QPSK	1	0	0 mm	back	1:1	0.893	1.089	0.972	0.334	0.364	
1 CC Uplink	N/A	2535.00	21100	Mid	LTE Band 7	20	12.3	11.84	-0.14	0	Ant 4B	DLXX7007L3TG	QPSK	1	0	0 mm	back	1:1	0.912	1.112	1.014	0.337	0.375	
1 CC Uplink	N/A	2560.00	21350	High	LTE Band 7	20	12.3	11.98	-0.20	0	Ant 4B	DLXX7007L3TG	QPSK	1	0	0 mm	back	1:1	0.898	1.076	0.966	0.328	0.353	
1 CC Uplink	N/A	2510.00	20850	Low	LTE Band 7	20	12.3	11.90	-0.11	0	Ant 4B	DLXX7007L3TG	QPSK	50	50	0 mm	back	1:1	0.867	1.096	0.950	0.324	0.355	
1 CC Uplink	N/A	2535.00	21100	Mid	LTE Band 7	20	12.3	11.89	-0.12	0	Ant 4B	DLXX7007L3TG	QPSK	50	0	0 mm	back	1:1	0.907	1.099	0.997	0.333	0.366	
1 CC Uplink	N/A	2560.00	21350	High	LTE Band 7	20	12.3	11.94	-0.16	0	Ant 4B	DLXX7007L3TG	QPSK	50	0	0 mm	back	1:1	0.948	1.086	1.030	0.345	0.375	
2 CC Uplink	PCC	2560.00	21350	High	LTE Band 7	20	12.3	12.00	0.02	0	Ant 4B	DLXX7007L3TG	QPSK	50	0	0 mm	back	1:1	0.998	1.072	1.070	0.363	0.389	
2 CC Uplink	SCC	2540.20	21152	High									QPSK	50	50									
1 CC Uplink	N/A	2560.00	21350	High	LTE Band 7	20	12.3	11.87	-0.21	0	Ant 4B	DLXX7007L3TG	QPSK	100	0	0 mm	back	1:1	0.918	1.104	1.013	0.334	0.369	
1 CC Uplink	N/A	2560.00	21350	High	LTE Band 7	20	12.3	11.98	0.03	0	Ant 4B	DLXX7007L3TG	QPSK	1	0	0 mm	top	1:1	0.585	1.076	0.629	0.207	0.223	
1 CC Uplink	N/A	2560.00	21350	High	LTE Band 7	20	12.3	11.94	0.00	0	Ant 4B	DLXX7007L3TG	QPSK	50	0	0 mm	top	1:1	0.582	1.086	0.632	0.205	0.223	
1 CC Uplink	N/A	2560.00	21350	High	LTE Band 7	20	12.3	11.98	0.16	0	Ant 4B	DLXX7007L3TG	QPSK	1	0	0 mm	right	1:1	0.023	1.076	0.025	0.010	0.011	
1 CC Uplink	N/A	2560.00	21350	High	LTE Band 7	20	12.3	11.94	0.15	0	Ant 4B	DLXX7007L3TG	QPSK	50	0	0 mm	right	1:1	0.022	1.086	0.024	0.010	0.011	
1 CC Uplink	N/A	2560.00	21350	High	LTE Band 7	20	12.3	11.98	0.00	0	Ant 4B	DLXX7007L3TG	QPSK	1	0	0 mm	left	1:1	0.034	1.076	0.037	0.014	0.015	
1 CC Uplink	N/A	2560.00	21350	High	LTE Band 7	20	12.3	11.94	0.15	0	Ant 4B	DLXX7007L3TG	QPSK	50	0	0 mm	left	1:1	0.036	1.086	0.039	0.014	0.015	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT												Body												
Spatial Peak												1.6 W/kg (mW/g)												
Uncontrolled Exposure/General Population												averaged over 1 gram												

Table 10-41
LTE Band 7 Body SAR – Ant 2A

MEASUREMENT RESULTS																			
1 CC Uplink 2 CC Uplink	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Dn [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor
		MHz	Ch.															(W/kg)	Reported SAR (1g) (W/kg)
1 CC Uplink	N/A	2510.00	20850	Low	LTE Band 7	20	12.0	11.93	0.07	0	Ant 2A	DLXX7007L3TG	QPSK	1	0	0 mm	back	1:1	0.656
1 CC Uplink	N/A	2535.00	21100	Mid	LTE Band 7	20	12.0	11.98	0.03	0	Ant 2A	DLXX7007L3TG	QPSK	1	0	0 mm	back	1:1	0.863
1 CC Uplink	N/A	2560.00	21350	High	LTE Band 7	20	12.0	12.00	-0.05	0	Ant 2A	DLXX7007L3TG	QPSK	1	0	0 mm	back	1:1	0.830
2 CC Uplink	PCC	2560.00	21350	High	LTE Band 7	20	12.0	12.00	0.16	0	Ant 2A	DLXX7007L3TG	QPSK	1	0	0 mm	back	1:1	0.834
2 CC Uplink	SCC	2540.20	21152	High									QPSK	1	99				
1 CC Uplink	N/A	2510.00	20850	Low	LTE Band 7	20	12.0	11.81	0.07	0	Ant 2A	DLXX7007L3TG	QPSK	50	25	0 mm	back	1:1	0.659
1 CC Uplink	N/A	2535.00	21100	Mid	LTE Band 7	20	12.0	11.91	0.10	0	Ant 2A	DLXX7007L3TG	QPSK	50	50	0 mm	back	1:1	0.673
1 CC Uplink	N/A	2560.00	21350	High	LTE Band 7	20	12.0	12.00	0.05	0	Ant 2A	DLXX7007L3TG	QPSK	50	50	0 mm	back	1:1	0.800
1 CC Uplink	N/A	2560.00	21350	High	LTE Band 7	20	12.0	11.99	0.06	0	Ant 2A	DLXX7007L3TG	QPSK	100	0	0 mm	back	1:1	0.783
1 CC Uplink	N/A	2560.00	21350	High	LTE Band 7	10	12.0	12.00	-0.04	0	Ant 2A	DLXX7007L3TG	QPSK	1	0	0 mm	bottom	1:1	0.430
1 CC Uplink	N/A	2560.00	21350	High	LTE Band 7	20	12.0	12.00	-0.03	0	Ant 2A	DLXX7007L3TG	QPSK	50	50	0 mm	bottom	1:1	0.427
1 CC Uplink	N/A	2560.00	21350	High	LTE Band 7	20	12.0	12.00	0.03	0	Ant 2A	DLXX7007L3TG	QPSK	1	0	0 mm	right	1:1	0.633
1 CC Uplink	N/A	2560.00	21350	High	LTE Band 7	20	12.0	12.00	0.04	0	Ant 2A	DLXX7007L3TG	QPSK	50	50	0 mm	right	1:1	0.651
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Body									
Spatial Peak										1.6 W/kg (mW/g)									
Uncontrolled Exposure/General Population										averaged over 1 gram									

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 148 of 234

Table 10-42
LTE Band 7 Body SAR – Ant 2B

MEASUREMENT RESULTS																								
1 CC Uplink 2 CC Uplink	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
		MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
1 CC Uplink	N/A	2510.00	20850	Low	LTE Band 7	20	12.3	12.26	-0.15	0	Ant 2B	DLX07007L3TG	QPSK	1	0	0 mm	back	1:1	1.080	1.009	1.090	0.391	0.395	
1 CC Uplink	N/A	2535.00	21100	Mid	LTE Band 7	20	12.3	12.28	-0.19	0	Ant 2B	DLX07007L3TG	QPSK	1	0	0 mm	back	1:1	1.100	1.005	1.106	0.394	0.396	
2 CC Uplink	PCC	2535.00	21100	Mid	LTE Band 7	20	12.3	12.27	0.19	0	Ant 2B	DLX0700FL3TG	QPSK	1	0	0 mm	back	1:1	1.130	1.007	1.138	0.395	0.398	A14
2 CC Uplink	SCC	2515.20	20902	Mid									QPSK	1	99									
1 CC Uplink	N/A	2560.00	21350	High	LTE Band 7	20	12.3	12.20	-0.15	0	Ant 2B	DLX07007L3TG	QPSK	1	0	0 mm	back	1:1	1.080	1.023	1.105	0.380	0.389	
1 CC Uplink	N/A	2510.00	20850	Low	LTE Band 7	20	12.3	12.18	-0.13	0	Ant 2B	DLX07007L3TG	QPSK	50	0	0 mm	back	1:1	1.050	1.028	1.079	0.378	0.389	
1 CC Uplink	N/A	2535.00	21100	Mid	LTE Band 7	20	12.3	12.19	-0.13	0	Ant 2B	DLX07007L3TG	QPSK	50	0	0 mm	back	1:1	1.070	1.026	1.098	0.382	0.392	
1 CC Uplink	N/A	2560.00	21350	High	LTE Band 7	20	12.3	12.11	-0.14	0	Ant 2B	DLX07007L3TG	QPSK	50	0	0 mm	back	1:1	1.050	1.045	1.097	0.370	0.387	
1 CC Uplink	N/A	2510.00	20850	Low	LTE Band 7	20	12.3	12.17	-0.16	0	Ant 2B	DLX07007L3TG	QPSK	100	0	0 mm	back	1:1	1.070	1.030	1.102	0.383	0.394	
1 CC Uplink	N/A	2535.00	21100	Mid	LTE Band 7	20	12.3	12.28	0.00	0	Ant 2B	DLX07007L3TG	QPSK	1	0	0 mm	bottom	1:1	0.610	1.005	0.613	0.222	0.223	
1 CC Uplink	N/A	2535.00	21100	Mid	LTE Band 7	20	12.3	12.19	-0.01	0	Ant 2B	DLX07007L3TG	QPSK	50	0	0 mm	bottom	1:1	0.584	1.026	0.599	0.211	0.216	
1 CC Uplink	N/A	2535.00	21100	Mid	LTE Band 7	20	12.3	12.28	0.12	0	Ant 2B	DLX07007L3TG	QPSK	1	0	0 mm	right	1:1	0.043	1.005	0.043	0.017	0.017	
1 CC Uplink	N/A	2535.00	21100	Mid	LTE Band 7	20	12.3	12.19	0.00	0	Ant 2B	DLX07007L3TG	QPSK	50	0	0 mm	right	1:1	0.042	1.026	0.043	0.016	0.016	
2 CC Uplink	PCC	2535.00	21100	Mid	LTE Band 7	20	12.3	12.27	0.01	0	Ant 2B	DLX0700FL3TG	QPSK	1	0	0 mm	back	1:1	1.090	1.007	1.098	0.390	0.393	
2 CC Uplink	SCC	2515.20	20902	Mid									QPSK	1	99									
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Body														
Spatial Peak										1.6 W/kg (mW/g)														
Uncontrolled Exposure/General Population										averaged over 1 gram														

Note: Blue entry represents variability measurement.

Table 10-43
LTE Band 41 Body SAR – Ant 4A

MEASUREMENT RESULTS																								
1 CC Uplink / 2 CC Uplink, Power Class	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
		MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	14.5	14.39	-0.07	0	Ant 4A	DLX07002L3TG	QPSK	1	99	0 mm	back	1:1.58	0.917	1.026	0.941	0.393	0.403	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	14.5	14.50	0.03	0	Ant 4A	DLX07002L3TG	QPSK	1	50	0 mm	back	1:1.58	1.030	1.000	1.030	0.427	0.427	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	14.5	14.23	0.02	0	Ant 4A	DLX07002L3TG	QPSK	1	0	0 mm	back	1:1.58	1.020	1.064	1.085	0.413	0.439	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	14.5	14.22	0.14	0	Ant 4A	DLX07002L3TG	QPSK	1	99	0 mm	back	1:1.58	1.000	1.067	1.067	0.384	0.410	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	14.5	14.08	-0.19	0	Ant 4A	DLX07002L3TG	QPSK	1	0	0 mm	back	1:1.58	0.999	1.102	1.101	0.398	0.439	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	14.5	14.31	0.12	0	Ant 4A	DLX07002L3TG	QPSK	50	50	0 mm	back	1:1.58	1.010	1.045	1.055	0.377	0.394	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	14.5	14.32	-0.03	0	Ant 4A	DLX07002L3TG	QPSK	50	0	0 mm	back	1:1.58	1.080	1.042	1.125	0.445	0.464	
1 CC Uplink - Power Class 2	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	14.5	14.30	0.19	0	Ant 4A	DLX07002L3TG	QPSK	50	0	0 mm	back	12.31	0.675	1.047	0.707	0.275	0.288	
2 CC Uplink - Power Class 3	PCC	2549.50	40185	Low-Mid	LTE Band 41	20	14.5	14.08	-0.02	0	Ant 4A	DLX07007L3TG	QPSK	50	0	0 mm	back	1:1.58	1.070	1.102	1.179	0.453	0.499	
2 CC Uplink - Power Class 3	SCC	2529.70	39987	Low-Mid	LTE Band 41	20	14.5	14.08	-0.02	0	Ant 4A	DLX07007L3TG	QPSK	50	50	0 mm	back	1:1.58	1.070	1.102	1.179	0.453	0.499	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	14.5	14.12	0.09	0	Ant 4A	DLX07002L3TG	QPSK	50	50	0 mm	back	1:1.58	1.030	1.091	1.124	0.413	0.451	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	14.5	14.17	-0.12	0	Ant 4A	DLX07002L3TG	QPSK	50	50	0 mm	back	1:1.58	0.950	1.079	1.025	0.342	0.369	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	14.5	14.10	-0.21	0	Ant 4A	DLX07002L3TG	QPSK	50	50	0 mm	back	1:1.58	0.951	1.096	1.042	0.373	0.409	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	14.5	14.30	-0.09	0	Ant 4A	DLX07002L3TG	QPSK	100	0	0 mm	back	1:1.58	1.070	1.047	1.120	0.442	0.463	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	14.5	14.50	-0.01	0	Ant 4A	DLX07002L3TG	QPSK	1	50	0 mm	top	1:1.58	0.253	1.000	0.253	0.075	0.075	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	14.5	14.32	-0.01	0	Ant 4A	DLX07002L3TG	QPSK	50	0	0 mm	top	1:1.58	0.247	1.042	0.257	0.073	0.076	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	14.5	14.50	0.18	0	Ant 4A	DLX07002L3TG	QPSK	1	50	0 mm	right	1:1.58	0.002	1.000	0.002	0.001	0.001	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	14.5	14.32	0.18	0	Ant 4A	DLX07002L3TG	QPSK	50	0	0 mm	right	1:1.58	0.002	1.042	0.002	0.001	0.001	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	14.5	14.39	0.01	0	Ant 4A	DLX07002L3TG	QPSK	1	99	0 mm	left	1:1.58	0.914	1.026	0.938	0.321	0.329	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	14.5	14.50	0.00	0	Ant 4A	DLX07002L3TG	QPSK	1	50	0 mm	left	1:1.58	0.787	1.000	0.787	0.274	0.274	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	14.5	14.23	-0.12	0	Ant 4A	DLX07002L3TG	QPSK	1	0	0 mm	left	1:1.58	0.734	1.064	0.781	0.251	0.267	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	14.5	14.22	0.14	0	Ant 4A	DLX07002L3TG	QPSK	1	99	0 mm	left	1:1.58	0.657	1.067	0.701	0.221	0.236	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	14.5	14.08	0.17	0	Ant 4A	DLX07002L3TG	QPSK	1	0	0 mm	left	1:1.58	0.635	1.102	0.700	0.211	0.233	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	14.5	14.31	0.01	0	Ant 4A	DLX07002L3TG	QPSK	50	50	0 mm	left	1:1.58	0.897	1.045	0.937	0.317	0.331	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	14.5	14.32	-0.17	0	Ant 4A	DLX07002L3TG	QPSK	50	0	0 mm	left	1:1.58	0.799	1.042	0.833	0.278	0.290	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	14.5	14.12	0.01	0	Ant 4A	DLX07002L3TG	QPSK	50	50	0 mm	left	1:1.58	0.699	1.091	0.763	0.240	0.262	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	14.5	14.17	-0.15	0	Ant 4A	DLX07002L3TG	QPSK	50	50	0 mm	left	1:1.58	0.651	1.079	0.702	0.218	0.235	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	14.5	14.10	-0.11	0	Ant 4A	DLX07002L3TG	QPSK	50	50	0 mm	left	1:1.58	0.602	1.096	0.660	0.200	0.219	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	14.5	14.30	-0.14	0	Ant 4A	DLX07002L3TG	QPSK	100	0	0 mm	left	1:1.58	0.775	1.047	0.811	0.270	0.283	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT												Body												
Spatial Peak												1.6 W/kg (mW/g)												
Uncontrolled Exposure/General Population												averaged over 1 gram												

Table 10-44
LTE Band 41 Body SAR – Ant 4B

MEASUREMENT RESULTS																								
1 CC Uplink / 2 CC Uplink, Power Class	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
		MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	15.0	14.91	0.02	0	Ant 4B	DLXX07002L3TG	QPSK	1	99	0 mm	back	1:1.58	1.060	1.021	1.082	0.406	0.415	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Md	LTE Band 41	20	15.0	14.96	0.06	0	Ant 4B	DLXX07002L3TG	QPSK	1	0	0 mm	back	1:1.58	1.110	1.009	1.120	0.423	0.427	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Md	LTE Band 41	20	15.0	14.83	0.02	0	Ant 4B	DLXX07002L3TG	QPSK	1	99	0 mm	back	1:1.58	1.050	1.040	1.092	0.390	0.406	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	15.0	14.82	0.05	0	Ant 4B	DLXX07002L3TG	QPSK	1	99	0 mm	back	1:1.58	1.010	1.042	1.052	0.368	0.383	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	15.0	14.76	0.04	0	Ant 4B	DLXX07002L3TG	QPSK	1	99	0 mm	back	1:1.58	0.880	1.057	0.930	0.315	0.333	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	15.0	14.76	0.04	0	Ant 4B	DLXX07002L3TG	QPSK	50	50	0 mm	back	1:1.58	1.040	1.057	1.099	0.399	0.422	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Md	LTE Band 41	20	15.0	14.82	0.02	0	Ant 4B	DLXX07002L3TG	QPSK	50	25	0 mm	back	1:1.58	1.080	1.042	1.125	0.408	0.425	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Md	LTE Band 41	20	15.0	14.72	0.01	0	Ant 4B	DLXX07002L3TG	QPSK	50	0	0 mm	back	1:1.58	1.080	1.067	1.152	0.404	0.431	
1 CC Uplink - Power Class 2	N/A	2593.00	40620	Md	LTE Band 41	20	15.0	14.78	0.04	0	Ant 4B	DLXX07002L3TG	QPSK	50	0	0 mm	back	1:2.31	0.796	1.052	0.837	0.306	0.322	
2 CC Uplink - Power Class 3	PCC	2593.00	40620	Md	LTE Band 41	20	15.0	14.70	0.03	0	Ant 4B	DLXX0700FL3TG	QPSK	50	0	0 mm	back	1:1.58	1.100	1.072	1.179	0.420	0.450	
2 CC Uplink - Power Class 3	SCC	2573.20	40422	Md									QPSK	50	50									
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	15.0	14.74	0.03	0	Ant 4B	DLXX07002L3TG	QPSK	50	0	0 mm	back	1:1.58	1.020	1.062	1.083	0.376	0.399	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	15.0	14.58	0.03	0	Ant 4B	DLXX07002L3TG	QPSK	50	0	0 mm	back	1:1.58	0.927	1.102	1.022	0.334	0.368	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Md	LTE Band 41	20	15.0	14.81	0.03	0	Ant 4B	DLXX07002L3TG	QPSK	100	0	0 mm	back	1:1.58	1.090	1.045	1.139	0.414	0.433	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	15.0	14.91	0.07	0	Ant 4B	DLXX07002L3TG	QPSK	1	99	0 mm	top	1:1.58	0.739	1.021	0.755	0.248	0.253	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Md	LTE Band 41	20	15.0	14.96	0.12	0	Ant 4B	DLXX07002L3TG	QPSK	1	0	0 mm	top	1:1.58	0.595	1.009	0.600	0.206	0.208	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Md	LTE Band 41	20	15.0	14.83	0.01	0	Ant 4B	DLXX07002L3TG	QPSK	1	99	0 mm	top	1:1.58	0.552	1.040	0.574	0.185	0.192	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	15.0	14.82	0.06	0	Ant 4B	DLXX07002L3TG	QPSK	1	99	0 mm	top	1:1.58	0.489	1.042	0.510	0.164	0.171	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	15.0	14.76	0.03	0	Ant 4B	DLXX07002L3TG	QPSK	1	99	0 mm	top	1:1.58	0.454	1.057	0.480	0.155	0.164	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	15.0	14.76	0.02	0	Ant 4B	DLXX07002L3TG	QPSK	50	50	0 mm	top	1:1.58	0.701	1.057	0.741	0.239	0.253	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Md	LTE Band 41	20	15.0	14.82	0.03	0	Ant 4B	DLXX07002L3TG	QPSK	50	25	0 mm	top	1:1.58	0.647	1.042	0.674	0.220	0.229	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Md	LTE Band 41	20	15.0	14.72	0.02	0	Ant 4B	DLXX07002L3TG	QPSK	50	0	0 mm	top	1:1.58	0.583	1.067	0.622	0.196	0.209	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	15.0	14.74	0.10	0	Ant 4B	DLXX07002L3TG	QPSK	50	0	0 mm	top	1:1.58	0.502	1.062	0.533	0.169	0.179	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	15.0	14.58	0.04	0	Ant 4B	DLXX07002L3TG	QPSK	50	0	0 mm	top	1:1.58	0.445	1.102	0.490	0.151	0.166	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Md	LTE Band 41	20	15.0	14.81	-0.19	0	Ant 4B	DLXX07002L3TG	QPSK	100	0	0 mm	top	1:1.58	0.643	1.045	0.672	0.217	0.227	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Md	LTE Band 41	20	15.0	14.96	0.13	0	Ant 4B	DLXX07002L3TG	QPSK	1	0	0 mm	right	1:1.58	0.031	1.009	0.031	0.014	0.014	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Md	LTE Band 41	20	15.0	14.82	0.07	0	Ant 4B	DLXX07002L3TG	QPSK	50	25	0 mm	right	1:1.58	0.025	1.042	0.026	0.011	0.011	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Md	LTE Band 41	20	15.0	14.96	-0.09	0	Ant 4B	DLXX07002L3TG	QPSK	1	0	0 mm	left	1:1.58	0.044	1.009	0.044	0.018	0.018	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Md	LTE Band 41	20	15.0	14.82	0.17	0	Ant 4B	DLXX07002L3TG	QPSK	50	25	0 mm	left	1:1.58	0.039	1.042	0.041	0.016	0.017	
ANSI / IEEE C95.1.1992 - SAFETY LIMIT										Body														
Spatial Peak										1.6 W/kg (mW/g)														
Uncontrolled Exposure/General Population										averaged over 1 gram														

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 150 of 234

Table 10-45
LTE Band 41 Body SAR – Ant 2A

MEASUREMENT RESULTS																								
1 CC Uplink 2 CC Uplink, Power Class	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
		MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	14.8	14.79	-0.17	0	Ant 2A	DLX07003L3TG	QPSK	1	0	0 mm	back	1:1.58	0.764	1.002	0.766	0.343	0.344	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	14.8	14.66	-0.06	0	Ant 2A	DLX07003L3TG	QPSK	1	99	0 mm	back	1:1.58	0.908	1.033	0.938	0.399	0.412	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	14.8	14.80	-0.02	0	Ant 2A	DLX07003L3TG	QPSK	1	99	0 mm	back	1:1.58	1.030	1.000	1.030	0.420	0.420	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	14.8	14.79	0.00	0	Ant 2A	DLX07003L3TG	QPSK	1	0	0 mm	back	1:1.58	1.040	1.002	1.042	0.420	0.421	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	14.8	14.71	0.03	0	Ant 2A	DLX07003L3TG	QPSK	1	99	0 mm	back	1:1.58	0.863	1.021	0.881	0.342	0.349	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	14.8	14.64	-0.11	0	Ant 2A	DLX07003L3TG	QPSK	50	50	0 mm	back	1:1.58	0.722	1.038	0.749	0.319	0.331	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	14.8	14.61	-0.01	0	Ant 2A	DLX07003L3TG	QPSK	50	0	0 mm	back	1:1.58	0.862	1.045	0.901	0.379	0.396	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	14.8	14.73	-0.05	0	Ant 2A	DLX07003L3TG	QPSK	50	0	0 mm	back	1:1.58	1.060	1.016	1.077	0.429	0.436	
1 CC Uplink - Power Class 2	N/A	2593.00	40620	Mid	LTE Band 41	20	14.8	14.77	-0.14	0	Ant 2A	DLX07003L3TG	QPSK	50	0	0 mm	back	1:2.31	0.695	1.007	0.700	0.287	0.289	
2 CC Uplink - Power Class 3	PCC	2593.00	40620	Mid	LTE Band 41	20	14.8	14.76	0.17	0	Ant 2A	DLX0700FL3TG	QPSK	50	0	0 mm	back	1:1.58	1.120	1.009	1.130	0.455	0.459	A15
2 CC Uplink - Power Class 3	SCC	2573.20	40422										Mid	QPSK	50									
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	14.8	14.63	-0.04	0	Ant 2A	DLX07003L3TG	QPSK	50	50	0 mm	back	1:1.58	1.010	1.040	1.050	0.403	0.419	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	14.8	14.60	-0.01	0	Ant 2A	DLX07003L3TG	QPSK	50	0	0 mm	back	1:1.58	0.917	1.047	0.960	0.363	0.380	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	14.8	14.72	-0.02	0	Ant 2A	DLX07003L3TG	QPSK	100	0	0 mm	back	1:1.58	1.050	1.019	1.070	0.423	0.431	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	14.8	14.80	0.04	0	Ant 2A	DLX07003L3TG	QPSK	1	99	0 mm	bottom	1:1.58	0.556	1.000	0.556	0.162	0.162	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	14.8	14.73	-0.01	0	Ant 2A	DLX07003L3TG	QPSK	50	0	0 mm	bottom	1:1.58	0.530	1.016	0.538	0.155	0.157	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	14.8	14.79	0.03	0	Ant 2A	DLX07003L3TG	QPSK	1	0	0 mm	right	1:1.58	0.549	1.002	0.550	0.162	0.162	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	14.8	14.66	-0.04	0	Ant 2A	DLX07003L3TG	QPSK	1	99	0 mm	right	1:1.58	0.482	1.033	0.498	0.157	0.162	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	14.8	14.80	-0.06	0	Ant 2A	DLX07003L3TG	QPSK	1	99	0 mm	right	1:1.58	0.642	1.000	0.642	0.195	0.195	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	14.8	14.79	-0.01	0	Ant 2A	DLX07003L3TG	QPSK	1	0	0 mm	right	1:1.58	0.430	1.002	0.431	0.137	0.137	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	14.8	14.71	-0.04	0	Ant 2A	DLX07003L3TG	QPSK	1	99	0 mm	right	1:1.58	0.348	1.021	0.355	0.108	0.110	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	14.8	14.64	-0.03	0	Ant 2A	DLX07003L3TG	QPSK	50	50	0 mm	right	1:1.58	0.590	1.038	0.612	0.195	0.202	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	14.8	14.61	0.03	0	Ant 2A	DLX07003L3TG	QPSK	50	0	0 mm	right	1:1.58	0.518	1.045	0.541	0.170	0.178	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	14.8	14.73	-0.04	0	Ant 2A	DLX07003L3TG	QPSK	50	0	0 mm	right	1:1.58	0.644	1.016	0.654	0.197	0.200	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	14.8	14.63	-0.03	0	Ant 2A	DLX07003L3TG	QPSK	50	50	0 mm	right	1:1.58	0.422	1.040	0.439	0.134	0.139	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	14.8	14.60	0.00	0	Ant 2A	DLX07003L3TG	QPSK	50	0	0 mm	right	1:1.58	0.368	1.047	0.385	0.115	0.120	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	14.8	14.72	0.02	0	Ant 2A	DLX07003L3TG	QPSK	100	0	0 mm	right	1:1.58	0.423	1.019	0.431	0.136	0.139	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Body														
Spatial Peak										1.6 W/kg (mW/g)														
Uncontrolled Exposure/General Population										averaged over 1 gram														

Table 10-46
LTE Band 41 Body SAR – Ant 2B

MEASUREMENT RESULTS																								
1 CC Uplink 2 CC Uplink, Power Class	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (lg)	Scaling Factor	Reported SAR (lg)	SAR (lg)	Reported SAR (lg)	Plot #	
		MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	14.5	14.47	0.00	0	Ant 2B	DLX0402AKR4X	QPSK	1	50	0 mm	back	1:1.58	1.030	1.007	1.037	0.376		
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	14.5	14.45	0.00	0	Ant 2B	DLX0402AKR4X	QPSK	1	0	0 mm	back	1:1.58	1.090	1.012	1.103	0.391	0.396	
1 CC Uplink - Power Class 2	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	14.5	14.46	0.02	0	Ant 2B	DLX0402AKR4X	QPSK	1	0	0 mm	back	1:2.31	0.722	1.009	0.728	0.261	0.263	
2 CC Uplink - Power Class 3	PCC	2549.50	40185	Low-Mid	LTE Band 41	20	14.5	14.07	-0.01	0	Ant 2B	DLX0700FL3TG	QPSK	1	0	0 mm	back	1:1.58	0.948	1.104	1.047	0.344	0.380	
2 CC Uplink - Power Class 3	SCC	2529.70	39987	Low-Mid									QPSK	1	99									
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	14.5	14.36	0.02	0	Ant 2B	DLX0402AKR4X	QPSK	1	99	0 mm	back	1:1.58	1.000	1.033	1.033	0.350	0.362	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	14.5	14.48	0.01	0	Ant 2B	DLX0402AKR4X	QPSK	1	99	0 mm	back	1:1.58	0.905	1.005	0.910	0.311	0.313	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	14.5	14.47	-0.01	0	Ant 2B	DLX0402AKR4X	QPSK	1	99	0 mm	back	1:1.58	0.844	1.007	0.850	0.285	0.287	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	14.5	14.43	-0.01	0	Ant 2B	DLX0402AKR4X	QPSK	50	50	0 mm	back	1:1.58	1.020	1.016	1.036	0.368	0.374	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	14.5	14.33	0.00	0	Ant 2B	DLX0402AKR4X	QPSK	50	0	0 mm	back	1:1.58	1.050	1.040	1.092	0.375	0.390	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	14.5	14.37	0.00	0	Ant 2B	DLX0402AKR4X	QPSK	50	50	0 mm	back	1:1.58	1.000	1.030	1.030	0.352	0.363	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	14.5	14.47	-0.03	0	Ant 2B	DLX0402AKR4X	QPSK	50	50	0 mm	back	1:1.58	0.898	1.007	0.904	0.308	0.310	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	14.5	14.33	0.01	0	Ant 2B	DLX0402AKR4X	QPSK	50	50	0 mm	back	1:1.58	0.828	1.040	0.861	0.280	0.291	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	14.5	14.46	-0.02	0	Ant 2B	DLX0402AKR4X	QPSK	100	0	0 mm	back	1:1.58	0.916	1.009	0.924	0.316	0.319	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	14.5	14.48	0.04	0	Ant 2B	DLX0402AKR4X	QPSK	1	99	0 mm	bottom	1:1.58	0.448	1.005	0.450	0.149	0.150	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	14.5	14.47	0.08	0	Ant 2B	DLX0402AKR4X	QPSK	50	50	0 mm	bottom	1:1.58	0.434	1.007	0.437	0.145	0.146	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	14.5	14.48	0.13	0	Ant 2B	DLX0402AKR4X	QPSK	1	99	0 mm	right	1:1.58	0.033	1.005	0.033	0.013	0.013	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	14.5	14.47	-0.12	0	Ant 2B	DLX0402AKR4X	QPSK	50	50	0 mm	right	1:1.58	0.031	1.007	0.031	0.012	0.012	
ANSI / IEEE C65.1 1992 - SAFETY LIMIT											Body													
Spatial Peak											1.6 W/kg (mW/g)													
Uncontrolled Exposure/General Population											averaged over 1 gram													

Table 10-47
2.4GHz WLAN Body SAR- Ant 4A

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Variant	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.														(W/kg)			(W/kg)	(W/kg)		
2412	1	802.11b	DSSS	22	13.75	13.50	0.07	0 mm	Ant 4A	V1	DLX300AKR4W	1	back	99.8	0.804	1.059	1.002	0.853	0.369	0.392	
2437	6	802.11b	DSSS	22	13.75	13.58	0.05	0 mm	Ant 4A	V1	DLX300AKR4W	1	back	99.8	0.949	1.040	1.002	0.989	0.417	0.435	
2462	11	802.11b	DSSS	22	13.75	13.62	-0.04	0 mm	Ant 4A	V1	DLX300AKR4W	1	back	99.8	0.839	1.030	1.002	0.866	0.358	0.369	
2437	6	802.11b	DSSS	22	13.75	13.58	0.01	0 mm	Ant 4A	V2	DLX305BKR4Q	1	back	99.8	0.802	1.040	1.002	0.836	0.359	0.374	
2462	11	802.11b	DSSS	22	13.75	13.62	0.11	0 mm	Ant 4A	V1	DLX300AKR4W	1	top	99.8	0.364	1.030	1.002	0.376	0.110	0.114	
2462	11	802.11b	DSSS	22	13.75	13.62	0.11	0 mm	Ant 4A	V1	DLX300AKR4W	1	right	99.8	0.005	1.030	1.002	0.005	0.001	0.001	
2462	11	802.11b	DSSS	22	13.75	13.62	-0.01	0 mm	Ant 4A	V1	DLX300AKR4W	1	left	99.8	0.462	1.030	1.002	0.477	0.178	0.184	
2462	11	802.11b	DSSS	22	6.75	6.74	0.12	0 mm	Ant 4A	V1	DLX400FKR4V	1	back	99.8	0.188	1.002	1.002	0.189	0.080	0.080	
2462	11	802.11b	DSSS	22	6.75	6.74	-0.15	0 mm	Ant 4A	V1	DLX400FKR4V	1	top	99.8	0.079	1.002	1.002	0.079	0.023	0.023	
2462	11	802.11b	DSSS	22	6.75	6.74	0.01	0 mm	Ant 4A	V1	DLX400FKR4V	1	left	99.8	0.107	1.002	1.002	0.107	0.040	0.040	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT																					
Spatial Peak								Body													
Uncontrolled Exposure/General Population								1.6 W/kg (mW/g) averaged over 1 gram													

Table 10-48
2.4GHz WLAN Body SAR- Ant 2A

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Variant	Device Serial Number	Data Rate [Mbps]	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.														(W/kg)			(W/kg)	(W/kg)		
2412	1	802.11b	DSSS	22	13.75	13.65	0.06	0 mm	Ant 2A	V1	DLX400FKR4V	1	back	99.8	1.110	1.023	1.002	1.138	0.496	0.508	A16
2437	6	802.11b	DSSS	22	13.75	13.75	-0.01	0 mm	Ant 2A	V1	DLX400FKR4V	1	back	99.8	0.965	1.000	1.002	0.967	0.427	0.428	
2462	11	802.11b	DSSS	22	13.75	13.56	-0.03	0 mm	Ant 2A	V1	DLX400FKR4V	1	back	99.8	0.917	1.045	1.002	0.960	0.401	0.420	
2412	1	802.11b	DSSS	22	13.75	13.57	0.01	0 mm	Ant 2A	V2	DLX3059KR4Q	1	back	99.8	0.920	1.042	1.002	0.961	0.410	0.428	
2437	6	802.11b	DSSS	22	13.75	13.75	-0.02	0 mm	Ant 2A	V1	DLX400FKR4V	1	bottom	99.8	0.416	1.000	1.002	0.417	0.126	0.126	
2437	6	802.11b	DSSS	22	13.75	13.75	0.01	0 mm	Ant 2A	V1	DLX400FKR4V	1	right	99.8	0.519	1.000	1.002	0.520	0.194	0.194	
2437	6	802.11b	DSSS	22	13.75	13.75	0.13	0 mm	Ant 2A	V1	DLX400FKR4V	1	left	99.8	0.008	1.000	1.002	0.008	0.003	0.003	
2412	1	802.11b	DSSS	22	6.75	6.74	0.00	0 mm	Ant 2A	V1	DLX400FKR4V	1	back	99.8	0.236	1.002	1.002	0.237	0.106	0.106	
2412	1	802.11b	DSSS	22	6.75	6.74	-0.06	0 mm	Ant 2A	V1	DLX400FKR4V	1	bottom	99.8	0.096	1.002	1.002	0.096	0.029	0.029	
2412	1	802.11b	DSSS	22	6.75	6.74	0.04	0 mm	Ant 2A	V1	DLX400FKR4V	1	right	99.8	0.124	1.002	1.002	0.124	0.049	0.049	
2412	1	802.11b	DSSS	22	13.75	13.65	-0.20	0 mm	Ant 2A	V1	DLX400FKR4V	1	back	99.8	0.994	1.023	1.002	1.019	0.442	0.453	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body													
Spatial Peak								1.6 W/kg (mW/g)													
Uncontrolled Exposure/General Population								averaged over 1 gram													

Note: Blue entry represents variability measurement.

Table 10-49
2.4GHz WLAN Body SAR- Ant 5

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Variant	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g) (W/kg)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.																	(W/kg)	(W/kg)	(W/kg)	
2412	1	802.11b	DSSS	22	19.0	17.99	0.05	0 mm	Ant 5	V2	DLX3059KR4Q	1	back	98.8	0.033	1.262	1.012	0.042	0.012	0.015	
2412	1	802.11b	DSSS	22	19.0	17.99	0.11	0 mm	Ant 5	V2	DLX3059KR4Q	1	bottom	98.8	0.002	1.262	1.012	0.003	0.000	0.000	
2412	1	802.11b	DSSS	22	19.0	17.99	-0.13	0 mm	Ant 5	V2	DLX3059KR4Q	1	right	98.8	0.660	1.262	1.012	0.843	0.235	0.300	
2437	6	802.11b	DSSS	22	19.0	17.92	0.03	0 mm	Ant 5	V2	DLX3059KR4Q	1	right	98.8	0.712	1.282	1.012	0.924	0.259	0.336	
2462	11	802.11b	DSSS	22	19.0	17.89	-0.10	0 mm	Ant 5	V2	DLX3059KR4Q	1	right	98.8	0.629	1.291	1.012	0.822	0.233	0.304	
2437	6	802.11b	DSSS	22	19.0	17.86	-0.06	0 mm	Ant 5	V1	DLX400FKR4V	1	right	98.8	0.614	1.300	1.012	0.808	0.231	0.304	
2412	1	802.11b	DSSS	22	19.0	17.99	0.11	0 mm	Ant 5	V2	DLX3059KR4Q	1	left	98.8	0.000	1.262	1.012	0.000	0.000	0.000	
2412	1	802.11b	DSSS	22	15.5	14.50	0.13	0 mm	Ant 5	V2	DLX3058KR4Q	1	back	98.8	0.014	1.259	1.012	0.018	0.005	0.006	
2412	1	802.11b	DSSS	22	15.5	14.50	0.00	0 mm	Ant 5	V2	DLX3058KR4Q	1	bottom	98.8	0.000	1.259	1.012	0.000	0.000	0.000	
2412	1	802.11b	DSSS	22	15.5	14.50	0.02	0 mm	Ant 5	V2	DLX3058KR4Q	1	right	98.8	0.329	1.259	1.012	0.419	0.117	0.149	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body													
Spatial Peak								1.6 W/kg (mW/g)													
Uncontrolled Exposure/General Population								averaged over 1 gram													

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 152 of 234

Table 10-50
5GHz WLAN Body SAR- Ant 5

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Variant	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.														(W/kg)			(W/kg)	(W/kg)		
5270	54	802.11n	OFDM	40	17.0	16.89	0.16	0 mm	Ant 5	V2	DLX3059KR4Q	13.5	back	96.4	0.083	1.026	1.037	0.088	0.030	0.032	
5270	54	802.11n	OFDM	40	17.0	16.89	0.12	0 mm	Ant 5	V2	DLX3059KR4Q	13.5	top	96.4	0.000	1.026	1.037	0.000	0.000	0.000	
5270	54	802.11n	OFDM	40	17.0	16.89	0.00	0 mm	Ant 5	V2	DLX3059KR4Q	13.5	bottom	96.4	0.000	1.026	1.037	0.000	0.000	0.000	
5270	54	802.11n	OFDM	40	17.0	16.89	0.08	0 mm	Ant 5	V2	DLX3059KR4Q	13.5	right	96.4	1.060	1.026	1.037	1.128	0.257	0.273	
5310	62	802.11n	OFDM	40	14.0	13.87	0.04	0 mm	Ant 5	V2	DLX3059KR4Q	13.5	right	96.4	0.567	1.030	1.037	0.606	0.133	0.142	A17
5270	54	802.11n	OFDM	40	17.0	17.00	-0.01	0 mm	Ant 5	V1	DLX300AKR4W	13.5	right	96.4	1.020	1.000	1.037	1.058	0.250	0.259	
5270	54	802.11n	OFDM	40	17.0	16.89	0.00	0 mm	Ant 5	V2	DLX3059KR4Q	13.5	left	96.4	0.000	1.026	1.037	0.000	0.000	0.000	
5290	58	802.11ac	OFDM	80	10.0	9.99	0.15	0 mm	Ant 5	V2	DLX3059KR4Q	29.3	back	93.0	0.011	1.002	1.075	0.012	0.003	0.003	
5290	58	802.11ac	OFDM	80	10.0	9.99	0.00	0 mm	Ant 5	V2	DLX3059KR4Q	29.3	bottom	93.0	0.000	1.002	1.075	0.000	0.000	0.000	
5290	58	802.11ac	OFDM	80	10.0	9.99	0.15	0 mm	Ant 5	V2	DLX3059KR4Q	29.3	right	93.0	0.185	1.002	1.075	0.199	0.042	0.045	
5610	122	802.11ac	OFDM	80	15.5	15.42	-0.14	0 mm	Ant 5	V1	DLX300AKR4W	29.3	back	93.0	0.066	1.019	1.075	0.072	0.023	0.025	
5610	122	802.11ac	OFDM	80	15.5	15.42	0.00	0 mm	Ant 5	V1	DLX300AKR4W	29.3	top	93.0	0.000	1.019	1.075	0.000	0.000	0.000	
5610	122	802.11ac	OFDM	80	15.5	15.42	0.14	0 mm	Ant 5	V1	DLX300AKR4W	29.3	bottom	93.0	0.000	1.019	1.075	0.000	0.000	0.000	
5530	106	802.11ac	OFDM	80	13.5	13.41	-0.01	0 mm	Ant 5	V1	DLX300AKR4W	29.3	right	93.0	0.497	1.021	1.075	0.545	0.123	0.135	
5610	122	802.11ac	OFDM	80	15.5	15.42	0.02	0 mm	Ant 5	V1	DLX300AKR4W	29.3	right	93.0	0.897	1.019	1.075	0.983	0.228	0.250	
5690	138	802.11ac	OFDM	80	15.5	15.41	0.19	0 mm	Ant 5	V1	DLX300AKR4W	29.3	right	93.0	0.664	1.021	1.075	0.729	0.170	0.187	
5610	122	802.11ac	OFDM	80	15.5	15.47	-0.07	0 mm	Ant 5	V2	DLX3059KR4Q	29.3	right	93.0	0.733	1.007	1.075	0.793	0.174	0.188	
5610	122	802.11ac	OFDM	80	15.5	15.42	0.00	0 mm	Ant 5	V1	DLX300AKR4W	29.3	left	93.0	0.000	1.019	1.075	0.000	0.000	0.000	
5690	138	802.11ac	OFDM	80	8.5	8.50	0.00	0 mm	Ant 5	V1	DLX300AKR4W	29.3	back	93.0	0.000	1.000	1.075	0.000	0.000	0.000	
5690	138	802.11ac	OFDM	80	8.5	8.50	0.00	0 mm	Ant 5	V1	DLX300AKR4W	29.3	bottom	93.0	0.000	1.000	1.075	0.000	0.000	0.000	
5690	138	802.11ac	OFDM	80	8.5	8.50	0.19	0 mm	Ant 5	V1	DLX300AKR4W	29.3	right	93.0	0.118	1.000	1.075	0.127	0.026	0.028	
5775	155	802.11ac	OFDM	80	16.5	15.94	0.20	0 mm	Ant 5	V1	DLX300AKR4W	29.3	back	93.0	0.074	1.138	1.075	0.091	0.029	0.035	
5775	155	802.11ac	OFDM	80	16.5	15.94	0.03	0 mm	Ant 5	V1	DLX300AKR4W	29.3	top	93.0	0.000	1.138	1.075	0.000	0.000	0.000	
5775	155	802.11ac	OFDM	80	16.5	15.94	-0.13	0 mm	Ant 5	V1	DLX300AKR4W	29.3	bottom	93.0	0.011	1.138	1.075	0.013	0.008	0.010	
5775	155	802.11ac	OFDM	80	16.5	15.94	0.01	0 mm	Ant 5	V1	DLX300AKR4W	29.3	right	93.0	0.790	1.138	1.075	0.966	0.205	0.251	
5775	155	802.11ac	OFDM	80	16.5	15.83	0.07	0 mm	Ant 5	V2	DLX3059KR4Q	29.3	right	93.0	0.715	1.167	1.075	0.897	0.180	0.226	
5775	155	802.11ac	OFDM	80	16.5	15.94	-0.17	0 mm	Ant 5	V1	DLX300AKR4W	29.3	left	93.0	0.001	1.138	1.075	0.001	0.000	0.000	
5775	155	802.11ac	OFDM	80	9.0	9.00	-0.19	0 mm	Ant 5	V1	DLX300AKR4W	29.3	back	93.0	0.013	1.000	1.075	0.014	0.003	0.003	
5775	155	802.11ac	OFDM	80	9.0	9.00	0.00	0 mm	Ant 5	V1	DLX300AKR4W	29.3	bottom	93.0	0.000	1.000	1.075	0.000	0.000	0.000	
5775	155	802.11ac	OFDM	80	9.0	9.00	0.11	0 mm	Ant 5	V1	DLX300AKR4W	29.3	right	93.0	0.163	1.000	1.075	0.175	0.037	0.040	
5270	54	802.11n	OFDM	40	17.0	16.89	0.15	0 mm	Ant 5	V2	DLX3059KR4Q	13.5	right	96.4	1.040	1.026	1.037	1.107	0.247	0.263	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body													
Spatial Peak								1.6 W/kg (mW/g)													
Uncontrolled Exposure/General Population								averaged over 1 gram													

Note: Blue entry represents variability measurement.

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 153 of 234

Table 10-51
5 GHz WLAN Body SAR – Ant 6

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Variant	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.														(W/kg)			(W/kg)	(W/kg)		
5270	54	802.11n	OFDM	40	17.0	16.96	0.12	0 mm	Ant 6	V1	DLX300AKR4W	13.5	back	96.5	0.063	1.009	1.036	0.066	0.025	0.026	
5270	54	802.11n	OFDM	40	17.0	16.96	-0.18	0 mm	Ant 6	V1	DLX300AKR4W	13.5	top	96.5	0.008	1.009	1.036	0.008	0.006	0.006	
5270	54	802.11n	OFDM	40	17.0	16.96	0.00	0 mm	Ant 6	V1	DLX300AKR4W	13.5	right	96.5	0.752	1.009	1.036	0.786	0.230	0.240	
5270	54	802.11n	OFDM	40	17.0	16.93	-0.12	0 mm	Ant 6	V2	DLX305BKR4Q	13.5	right	96.5	0.680	1.016	1.036	0.716	0.204	0.215	
5270	54	802.11n	OFDM	40	17.0	16.96	-0.18	0 mm	Ant 6	V1	DLX300AKR4W	13.5	left	96.5	0.004	1.009	1.036	0.004	0.001	0.001	
5290	58	802.11ac	OFDM	80	12.0	12.00	0.20	0 mm	Ant 6	V1	DLX300AKR4W	29.3	back	92.6	0.018	1.000	1.080	0.019	0.006	0.006	
5290	58	802.11ac	OFDM	80	12.0	12.00	0.01	0 mm	Ant 6	V1	DLX300AKR4W	29.3	top	92.6	0.000	1.000	1.080	0.000	0.000	0.000	
5290	58	802.11ac	OFDM	80	12.0	12.00	-0.18	0 mm	Ant 6	V1	DLX300AKR4W	29.3	right	92.6	0.227	1.000	1.080	0.245	0.059	0.064	
5610	122	802.11ac	OFDM	80	15.5	15.46	-0.16	0 mm	Ant 6	V1	DLX300AKR4W	29.3	back	92.6	0.102	1.009	1.080	0.111	0.053	0.058	
5610	122	802.11ac	OFDM	80	15.5	15.46	-0.02	0 mm	Ant 6	V1	DLX300AKR4W	29.3	top	92.6	0.034	1.009	1.080	0.037	0.031	0.034	
5530	106	802.11ac	OFDM	80	13.5	13.50	-0.01	0 mm	Ant 6	V1	DLX300AKR4W	29.3	right	92.6	0.550	1.000	1.080	0.594	0.167	0.180	
5610	122	802.11ac	OFDM	80	15.5	15.46	0.09	0 mm	Ant 6	V1	DLX300AKR4W	29.3	right	92.6	0.944	1.009	1.080	1.029	0.300	0.327	
5690	138	802.11ac	OFDM	80	15.5	15.42	0.03	0 mm	Ant 6	V1	DLX300AKR4W	29.3	right	92.6	0.799	1.019	1.080	0.879	0.249	0.274	
5610	122	802.11ac	OFDM	80	15.5	15.43	-0.02	0 mm	Ant 6	V2	DLX305BKR4Q	29.3	right	92.6	0.842	1.016	1.080	0.924	0.267	0.293	
5610	122	802.11ac	OFDM	80	15.5	15.46	-0.15	0 mm	Ant 6	V1	DLX300AKR4W	29.3	left	92.6	0.018	1.009	1.080	0.020	0.004	0.004	
5690	138	802.11ac	OFDM	80	10.5	10.50	0.03	0 mm	Ant 6	V1	DLX300AKR4W	29.3	back	92.6	0.020	1.000	1.080	0.022	0.006	0.006	
5690	138	802.11ac	OFDM	80	10.5	10.50	0.00	0 mm	Ant 6	V1	DLX300AKR4W	29.3	top	92.6	0.000	1.000	1.080	0.000	0.000	0.000	
5690	138	802.11ac	OFDM	80	10.5	10.50	0.19	0 mm	Ant 6	V1	DLX300AKR4W	29.3	right	92.6	0.254	1.000	1.080	0.274	0.075	0.081	
5775	155	802.11ac	OFDM	80	15.0	15.00	0.18	0 mm	Ant 6	V1	DLX300AKR4W	29.3	back	92.6	0.068	1.000	1.080	0.073	0.027	0.029	
5775	155	802.11ac	OFDM	80	15.0	15.00	0.00	0 mm	Ant 6	V1	DLX300AKR4W	29.3	top	92.6	0.000	1.000	1.080	0.000	0.000	0.000	
5775	155	802.11ac	OFDM	80	15.0	15.00	-0.07	0 mm	Ant 6	V1	DLX300AKR4W	29.3	right	92.6	0.744	1.000	1.080	0.804	0.247	0.267	
5775	155	802.11ac	OFDM	80	15.0	15.00	0.03	0 mm	Ant 6	V2	DLX305BKR4Q	29.3	right	92.6	0.726	1.000	1.080	0.784	0.237	0.256	
5775	155	802.11ac	OFDM	80	15.0	15.00	0.00	0 mm	Ant 6	V1	DLX300AKR4W	29.3	left	92.6	0.001	1.000	1.080	0.001	0.000	0.000	
5775	155	802.11ac	OFDM	80	10.0	9.90	-0.20	0 mm	Ant 6	V1	DLX300AKR4W	29.3	back	92.6	0.016	1.023	1.080	0.018	0.005	0.000	
5775	155	802.11ac	OFDM	80	10.0	9.90	0.00	0 mm	Ant 6	V1	DLX300AKR4W	29.3	top	92.6	0.000	1.023	1.080	0.000	0.000	0.000	
5775	155	802.11ac	OFDM	80	10.0	9.90	0.19	0 mm	Ant 6	V1	DLX300AKR4W	29.3	right	92.6	0.236	1.023	1.080	0.261	0.070	0.000	
5610	122	802.11ac	OFDM	80	15.5	15.46	-0.06	0 mm	Ant 6	V1	DLX300AKR4W	29.3	right	92.6	0.847	1.009	1.080	0.923	0.267	0.291	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body													
Spatial Peak								1.6 W/kg (mW/g)													
Uncontrolled Exposure/General Population								averaged over 1 gram													

Note: Blue entry represents variability measurement.

Table 10-52
Bluetooth Body SAR – Ant 4A

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Variant	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.													(W/kg)			(W/kg)	(W/kg)	(W/kg)	
2402	0	Bluetooth	FHSS	16.0	16.00	-0.10	0 mm	Ant 4A	V2	DLX305BKR4Q	1	back	76.2	1.010	1.000	1.018	1.028	0.472	0.480	
2441	39	Bluetooth	FHSS	16.0	15.99	-0.13	0 mm	Ant 4A	V2	DLX305BKR4Q	1	back	76.2	0.968	1.002	1.018	0.987	0.450	0.459	
2480	78	Bluetooth	FHSS	16.0	15.66	-0.11	0 mm	Ant 4A	V2	DLX305BKR4Q	1	back	76.2	0.853	1.081	1.018	0.939	0.391	0.430	
2402	0	Bluetooth	FHSS	16.0	15.95	-0.01	0 mm	Ant 4A	V1	DLX300AKR4W	1	back	76.5	0.712	1.012	1.014	0.731	0.337	0.346	
2402	0	Bluetooth	FHSS	16.0	16.00	-0.02	0 mm	Ant 4A	V2	DLX305BKR4Q	1	top	76.2	0.401	1.000	1.018	0.408	0.124	0.126	
2402	0	Bluetooth	FHSS	16.0	16.00	0.15	0 mm	Ant 4A	V2	DLX305BKR4Q	1	right	76.2	0.003	1.000	1.018	0.003	0.001	0.001	
2402	0	Bluetooth	FHSS	16.0	16.00	0.04	0 mm	Ant 4A	V2	DLX305BKR4Q	1	left	76.2	0.773	1.000	1.018	0.787	0.280	0.285	
2441	39	Bluetooth	FHSS	9.0	9.00	0.17	0 mm	Ant 4A	V2	DLX305BKR4Q	1	back	76.2	0.165	1.000	1.018	0.168	0.076	0.077	
2441	39	Bluetooth	FHSS	9.0	9.00	0.06	0 mm	Ant 4A	V2	DLX305BKR4Q	1	top	76.2	0.064	1.000	1.018	0.065	0.019	0.019	
2441	39	Bluetooth	FHSS	9.0	9.00	0.10	0 mm	Ant 4A	V2	DLX305BKR4Q	1	left	76.2	0.100	1.000	1.018	0.102	0.033	0.034	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body												
Spatial Peak								1.6 W/kg (mW/g)												
Uncontrolled Exposure/General Population								averaged over 1 gram												

Note: The reported SAR was scaled to the 77.5% transmission duty factor to determine compliance since the duty factor of the device is permanently limited to 77.5% per the manufacturer.

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 154 of 234

Table 10-53
Bluetooth Body SAR – Ant 2A

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Variant	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.													(W/kg)			(W/kg)	(W/kg)		
2402	0	Bluetooth	FHSS	15.0	15.00	-0.09	0 mm	Ant 2A	V1	DLX300AKR4W	1	back	75.0	1.020	1.000	1.034	1.055	0.456	0.472	A18
2441	39	Bluetooth	FHSS	15.0	14.71	-0.17	0 mm	Ant 2A	V1	DLX300AKR4W	1	back	75.0	0.967	1.069	1.034	1.069	0.431	0.476	
2480	78	Bluetooth	FHSS	15.0	14.66	-0.07	0 mm	Ant 2A	V1	DLX300AKR4W	1	back	75.0	0.922	1.081	1.034	1.031	0.404	0.452	
2441	39	Bluetooth	FHSS	15.0	14.89	0.09	0 mm	Ant 2A	V2	DLX305BKR4Q	1	back	76.6	0.903	1.026	1.012	0.938	0.413	0.429	
2402	0	Bluetooth	FHSS	15.0	15.00	-0.04	0 mm	Ant 2A	V1	DLX300AKR4W	1	bottom	75.0	0.290	1.000	1.034	0.300	0.090	0.093	
2402	0	Bluetooth	FHSS	15.0	15.00	0.00	0 mm	Ant 2A	V1	DLX300AKR4W	1	right	75.0	0.578	1.000	1.034	0.598	0.204	0.211	
2402	0	Bluetooth	FHSS	15.0	15.00	0.13	0 mm	Ant 2A	V1	DLX300AKR4W	1	left	75.0	0.003	1.000	1.034	0.003	0.001	0.001	
2480	78	Bluetooth	FHSS	8.00	7.58	0.02	0 mm	Ant 2A	V1	DLX300AKR4W	1	back	75.0	0.205	1.102	1.034	0.234	0.091	0.104	
2480	78	Bluetooth	FHSS	8.00	7.58	-0.02	0 mm	Ant 2A	V1	DLX300AKR4W	1	bottom	75.0	0.076	1.102	1.034	0.087	0.022	0.025	
2480	78	Bluetooth	FHSS	8.00	7.58	0.00	0 mm	Ant 2A	V1	DLX300AKR4W	1	right	75.0	0.130	1.102	1.034	0.148	0.048	0.055	
2441	39	Bluetooth	FHSS	12.50	12.16	0.03	0 mm	Ant 2A	V1	DLX300AKR4W	1	back	75.0	0.554	1.081	1.034	0.619	0.245	0.274	
2441	39	Bluetooth	FHSS	12.50	12.16	-0.06	0 mm	Ant 2A	V1	DLX300AKR4W	1	bottom	75.0	0.254	1.081	1.034	0.284	0.077	0.086	
2441	39	Bluetooth	FHSS	12.50	12.16	0.01	0 mm	Ant 2A	V1	DLX300AKR4W	1	right	75.0	0.285	1.081	1.034	0.319	0.099	0.111	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram													

Note: The reported SAR was scaled to the 77.5% transmission duty factor to determine compliance since the duty factor of the device is permanently limited to 77.5% per the manufacturer.

Table 10-54
Bluetooth Body SAR – Ant 5

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Variant	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.													(W/kg)			(W/kg)	(W/kg)		
2402	0	Bluetooth	FHSS	18.50	18.50	0.00	0 mm	Ant 5	V1	DLXX300AKR4W	1	back	76.2	0.018	1.000	1.018	0.018	0.006	0.006	
2402	0	Bluetooth	FHSS	18.50	18.50	-0.02	0 mm	Ant 5	V1	DLXX300AKR4W	1	bottom	76.2	0.001	1.000	1.018	0.001	0.000	0.000	
2402	0	Bluetooth	FHSS	18.50	18.50	-0.06	0 mm	Ant 5	V1	DLXX300AKR4W	1	right	76.2	0.608	1.000	1.018	0.619	0.217	0.221	
2441	39	Bluetooth	FHSS	18.50	17.91	0.04	0 mm	Ant 5	V1	DLXX300AKR4W	1	right	76.2	0.623	1.146	1.018	0.727	0.224	0.261	
2480	78	Bluetooth	FHSS	18.50	18.02	-0.16	0 mm	Ant 5	V1	DLXX300AKR4W	1	right	76.2	0.509	1.117	1.018	0.579	0.180	0.205	
2441	39	Bluetooth	FHSS	18.50	18.50	-0.10	0 mm	Ant 5	V2	DLXX3059KR4Q	1	right	76.8	0.528	1.000	1.009	0.533	0.188	0.190	
2402	0	Bluetooth	FHSS	18.50	18.50	0.00	0 mm	Ant 5	V1	DLXX300AKR4W	1	left	76.2	0.000	1.000	1.018	0.000	0.000	0.000	
2402	0	Bluetooth	FHSS	17.00	15.15	0.21	0 mm	Ant 5	V1	DLXX300AKR4W	1	back	76.2	0.007	1.531	1.018	0.011	0.002	0.003	
2402	0	Bluetooth	FHSS	17.00	15.15	0.04	0 mm	Ant 5	V1	DLXX300AKR4W	1	right	76.2	0.214	1.531	1.018	0.334	0.075	0.117	
2402	0	Bluetooth	FHSS	14.50	14.09	0.16	0 mm	Ant 5	V1	DLXX300AKR4W	1	back	76.2	0.007	1.099	1.018	0.008	0.002	0.002	
2402	0	Bluetooth	FHSS	14.50	14.09	-0.01	0 mm	Ant 5	V1	DLXX300AKR4W	1	right	76.2	0.220	1.099	1.018	0.246	0.076	0.085	
2402	0	Bluetooth	FHSS	12.50	12.42	-0.15	0 mm	Ant 5	V1	DLXX300AKR4W	1	back	76.2	0.005	1.019	1.018	0.005	0.001	0.001	
2402	0	Bluetooth	FHSS	12.50	12.42	0.00	0 mm	Ant 5	V1	DLXX300AKR4W	1	right	76.2	0.135	1.019	1.018	0.140	0.047	0.049	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram													

Note: The reported SAR was scaled to the 77.5% transmission duty factor to determine compliance since the duty factor of the device is permanently limited to 77.5% per the manufacturer.

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 155 of 234

10.2 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in FCC KDB Publication 616217 D04v01r02 and FCC KDB Publication 447498 D01v06.
2. Batteries are fully charged at the beginning of the SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
6. Per FCC KDB 865664 D01v01r04, variability SAR tests were performed when the measured SAR results for a frequency band were greater than or equal to 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 12 for variability analysis.
7. FCC KDB Publication 616217 D04v01r02 Section 4.3, SAR tests are required for the back surface and edges of the tablet with the tablet touching the phantom. The SAR Exclusion Threshold in FCC KDB 447498 D01v06 was applied to determine SAR test exclusion for adjacent edge configurations.

GSM Test Notes:

1. Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

UMTS Notes:

1. UMTS mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03r01.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r04. The general test procedures used for testing can be found in Section 7.5.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 and MCC=001 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
4. Per FCC KDB Publication 447498 D01v06, when the reported (scaled) for LTE Band 41 SAR measured at the highest output power channel in a given a test configuration was > 0.6 W/kg for 1g evaluations, testing at the other channels was required for such test configurations.

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 156 of 234

5. TDD LTE was tested per the guidance provided in FCC KDB Publication 941225 D05v02r04. Testing was performed using UL-DL configuration 0 with 6 UL subframes and 2 S subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Section 4, the duty factor for special subframe configuration 6 using extended cyclic prefix is 0.633.
6. Per KDB Publication 941225 D05Av01r02, SAR for downlink only LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.
7. This device supports Power Class 2 and Power Class 3 operations for LTE Band 41. The highest available duty cycle for Power Class 2 operations is 43.3 % using UL-DL configuration 1. Per FCC Guidance, all SAR tests were performed using Power Class 3. SAR with power class 2 at the available duty factor was additionally performed for the power class 3 configuration with the highest SAR configuration for each exposure conditions. Please see Section 13 for linearity results.
8. For LTE Band 7 and LTE Band 41, per Fall 2017 TCB Workshop Notes, SAR was first measured with only a single carrier active in the uplink (carrier aggregation not active). For each exposure condition, the uplink CA scenario with two component carriers was additionally tested for the configuration with the highest SAR when carrier aggregation was not active. The SCC was configured with the closest available contiguous channel. The two component carriers were configured so the resource blocks are physically allocated side by side to achieve the maximum output power. When the reported 1g SAR was >1.2 W/kg or the reported 10g SAR was > 3.0 W/kg, all required test channels were additionally evaluated.

WLAN Notes:

1. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 7.6.4 for more information.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg for 1g evaluations. See Section 7.6.5 for more information.
3. Per KDB Publication 248227 D01v02r02, SAR for MIMO was evaluated by following the simultaneous SAR provisions from KDB Publication 447498 D01v06 by either evaluating the sum of the 1g SAR values of each antenna transmitting independently or making a SAR measurement with both antennas transmitting simultaneously. Please see Section 11 for complete analysis.
4. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg for 1g evaluations or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.

Bluetooth Notes

1. Bluetooth SAR was evaluated with a test mode with hopping disabled with DH5 operation. The reported SAR was scaled to the 77.5% transmission duty factor to determine compliance since the duty factor of the device is limited to 77.5% per the manufacturer. See Section 8.6 for the time domain plot and calculation for the duty factor of the device.

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 157 of 234

11 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

11.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to devices with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

11.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore, simultaneous transmission analysis is required. Per FCC KDB Publication 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is ≤ 1.6 W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1g or 10g SAR.

Note: For SAR summations for some scenarios when the output power levels are reduced, SAR values at the maximum output power level were used as the most conservative evaluation for simultaneous transmission analysis.

** The SAR distributions for at least one of the antennas are spatially separated from the other antennas per FCC KDB Publication 248227 Section 6.1 procedures. Therefore, the simultaneous transmission were treated independently for this configuration. See Section 11.4 for more information about the Spatial Separation Analysis.

11.3 Body SAR Simultaneous Transmission Analysis

Table 11-1
GSM 850 Ant 1 Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	GPRS 850 Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	0.524	1.138	0.989	0.042	1.138**	1.513	0.566	1.138**	1.555
	Top	0.400*	0.400*	0.376	0.400*	0.800	0.776	0.800	1.176	1.176
	Bottom	0.320	0.417	0.400*	0.003	0.737	0.720	0.323	1.137	0.723
	Right	0.007	0.520	0.005	0.924	0.527	0.012	0.931	0.532	0.936
	Left	1.024	0.008	0.477	0.000	1.032	1.501	1.024	1.509	1.501

Table 11-2
UMTS 850 Ant 1 Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	UMTS 850 Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	0.682	1.138	0.989	0.042	1.138**	0.989**	0.724	1.138**	0.989**
	Top	0.400*	0.400*	0.376	0.400*	0.800	0.776	0.800	1.176	1.176
	Bottom	0.375	0.417	0.400*	0.003	0.792	0.775	0.378	1.192	0.778
	Right	0.016	0.520	0.005	0.924	0.536	0.021	0.940	0.541	0.945
	Left	1.184	0.008	0.477	0.000	1.192	1.184**	1.184	1.192**	1.184**

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 158 of 234

Table 11-3
LTE Band 12 Ant 1 Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	LTE Band 12 Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	0.576	1.138	0.989	0.042	1.138**	1.565	0.618	1.138**	0.989**
	Top	0.400*	0.400*	0.376	0.400*	0.800	0.776	0.800	1.176	1.176
	Bottom	0.432	0.417	0.400*	0.003	0.849	0.832	0.435	1.249	0.835
	Right	0.006	0.520	0.005	0.924	0.526	0.011	0.930	0.531	0.935
	Left	1.180	0.008	0.477	0.000	1.188	1.180**	1.180	1.188**	1.180**

Table 11-4
LTE Band 13 Ant 1 Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	LTE Band 13 Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	0.843	1.138	0.989	0.042	1.138**	0.989**	0.885	1.138**	0.989**
	Top	0.400*	0.400*	0.376	0.400*	0.800	0.776	0.800	1.176	1.176
	Bottom	0.530	0.417	0.400*	0.003	0.947	0.930	0.533	1.347	0.933
	Right	0.010	0.520	0.005	0.924	0.530	0.015	0.934	0.535	0.939
	Left	0.974	0.008	0.477	0.000	0.982	1.451	0.974	1.459	1.451

Table 11-5
LTE Band 14 Ant 1 Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	LTE Band 14 Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	0.869	1.138	0.989	0.042	1.138**	0.989**	0.911	1.138**	0.989**
	Top	0.400*	0.400*	0.376	0.400*	0.800	0.776	0.800	1.176	1.176
	Bottom	0.615	0.417	0.400*	0.003	1.032	1.015	0.618	1.432	1.018
	Right	0.013	0.520	0.005	0.924	0.533	0.018	0.937	0.538	0.942
	Left	0.995	0.008	0.477	0.000	1.003	1.472	0.995	1.480	1.472

Table 11-6
LTE Band 5 (Cell) Ant 1 Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	LTE Band 5 (Cell) Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	0.905	1.138	0.989	0.042	1.138**	0.989**	0.947	1.138**	0.989**
	Top	0.400*	0.400*	0.376	0.400*	0.800	0.776	0.800	1.176	1.176
	Bottom	0.419	0.417	0.400*	0.003	0.836	0.819	0.422	1.236	0.822
	Right	0.013	0.520	0.005	0.924	0.533	0.018	0.937	0.538	0.942
	Left	1.172	0.008	0.477	0.000	1.180	1.172**	1.172	1.180**	1.172**

Table 11-7
LTE Band 26 (Cell) Ant 1 Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	LTE Band 26 (Cell) Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	0.901	1.138	0.989	0.042	1.138**	0.989**	0.943	1.138**	0.989**
	Top	0.400*	0.400*	0.376	0.400*	0.800	0.776	0.800	1.176	1.176
	Bottom	0.365	0.417	0.400*	0.003	0.782	0.765	0.368	1.182	0.768
	Right	0.006	0.520	0.005	0.924	0.526	0.011	0.930	0.531	0.935
	Left	1.163	0.008	0.477	0.000	1.171	1.163**	1.163	1.171**	1.163**

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 159 of 234

Table 11-8
GSM 850 Ant 3 Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	GPRS 850 Ant 3 SAR (W/kg)	2.4 GHz WLAN Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	1.044	1.138	0.989	0.042	1.138**	1.044**	1.086	1.138**	1.044**
	Top	0.500	0.400*	0.376	0.400*	0.900	0.876	0.900	1.276	1.276
	Bottom	0.400*	0.417	0.400*	0.003	0.817	0.800	0.403	1.217	0.803
	Right	0.830	0.520	0.005	0.924	1.350	0.835	0.924**	1.355	0.924**
	Left	0.400*	0.008	0.477	0.000	0.408	0.877	0.400	0.885	0.877

Table 11-9
UMTS 850 Ant 3 Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	UMTS 850 Ant 3 SAR (W/kg)	2.4 GHz WLAN Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	1.165	1.138	0.989	0.042	1.165**	1.165**	1.207	1.165**	1.165**
	Top	0.560	0.400*	0.376	0.400*	0.960	0.936	0.960	1.336	1.336
	Bottom	0.400*	0.417	0.400*	0.003	0.817	0.800	0.403	1.217	0.803
	Right	1.122	0.520	0.005	0.924	1.122**	1.127	1.122**	1.127**	1.127**
	Left	0.400*	0.008	0.477	0.000	0.408	0.877	0.400	0.885	0.877

Table 11-10
LTE Band 12 Ant 3 Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	LTE Band 12 Ant 3 SAR (W/kg)	2.4 GHz WLAN Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	1.090	1.138	0.989	0.042	1.138**	1.090**	1.132	1.138**	1.090**
	Top	0.507	0.400*	0.376	0.400*	0.907	0.883	0.907	1.283	1.283
	Bottom	0.400*	0.417	0.400*	0.003	0.817	0.800	0.403	1.217	0.803
	Right	0.931	0.520	0.005	0.924	1.451	0.936	0.931**	1.456	0.936**
	Left	0.400*	0.008	0.477	0.000	0.408	0.877	0.400	0.885	0.877

Table 11-11
LTE Band 13 Ant 3 Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	LTE Band 13 Ant 3 SAR (W/kg)	2.4 GHz WLAN Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	0.983	1.138	0.989	0.042	1.138**	0.989**	1.025	1.138**	0.989**
	Top	0.551	0.400*	0.376	0.400*	0.951	0.927	0.951	1.327	1.327
	Bottom	0.400*	0.417	0.400*	0.003	0.817	0.800	0.403	1.217	0.803
	Right	0.586	0.520	0.005	0.924	1.106	0.591	1.510	1.111	1.515
	Left	0.400*	0.008	0.477	0.000	0.408	0.877	0.400	0.885	0.877

Table 11-12
LTE Band 14 Ant 3 Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	LTE Band 14 Ant 3 SAR (W/kg)	2.4 GHz WLAN Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	0.894	1.138	0.989	0.042	1.138**	0.989**	0.936	1.138**	0.989**
	Top	0.519	0.400*	0.376	0.400*	0.919	0.895	0.919	1.295	1.295
	Bottom	0.400*	0.417	0.400*	0.003	0.817	0.800	0.403	1.217	0.803
	Right	0.587	0.520	0.005	0.924	1.107	0.592	1.511	1.112	1.516
	Left	0.400*	0.008	0.477	0.000	0.408	0.877	0.400	0.885	0.877

Table 11-13
LTE Band 5 (Cell) Ant 3 Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	LTE Band 5 (Cell) Ant 3 SAR (W/kg)	2.4 GHz WLAN Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	1.050	1.138	0.989	0.042	1.138**	1.050**	1.092	1.138**	1.050**
	Top	0.626	0.400*	0.376	0.400*	1.026	1.002	1.026	1.402	1.402
	Bottom	0.400*	0.417	0.400*	0.003	0.817	0.800	0.403	1.217	0.803
	Right	0.722	0.520	0.005	0.924	1.242	0.727	0.924**	1.247	0.924**
	Left	0.400*	0.008	0.477	0.000	0.408	0.877	0.400	0.885	0.877

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 160 of 234

Table 11-14
LTE Band 26 (Cell) Ant 3 Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	LTE Band 26 (Cell) Ant 3 SAR (W/kg)	2.4 GHz WLAN Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	1.159	1.138	0.989	0.042	1.159**	1.159**	1.201	1.159**	1.159**
	Top	0.484	0.400*	0.376	0.400*	0.884	0.860	0.884	1.260	1.260
	Bottom	0.400*	0.417	0.400*	0.003	0.817	0.800	0.403	1.217	0.803
	Right	1.160	0.520	0.005	0.924	1.160**	1.165	1.160**	1.165**	1.165**
	Left	0.400*	0.008	0.477	0.000	0.408	0.877	0.400	0.885	0.877

Table 11-15
GSM 1900 Ant 4A Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	GPRS 1900 Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 4A Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	1.068	1.138	0.189	0.042	1.138**	1.257	1.110	1.257**	1.299
	Top	0.359	0.400*	0.079	0.400*	0.759	0.438	0.759	0.838	0.838
	Bottom	0.400*	0.417	0.400*	0.003	0.817	0.800	0.403	1.217	0.803
	Right	0.001	0.520	0.005	0.924	0.521	0.006	0.925	0.526	0.930
	Left	0.881	0.008	0.107	0.000	0.889	0.988	0.881	0.996	0.988

Table 11-16
UMTS 1750 Ant 4A Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	UMTS 1750 Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 4A Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	1.019	1.138	0.189	0.042	1.138**	1.208	1.061	1.208**	1.250
	Top	0.321	0.400*	0.079	0.400*	0.721	0.400	0.721	0.800	0.800
	Bottom	0.400*	0.417	0.400*	0.003	0.817	0.800	0.403	1.217	0.803
	Right	0.001	0.520	0.005	0.924	0.521	0.006	0.925	0.526	0.930
	Left	0.931	0.008	0.107	0.000	0.939	1.038	0.931	1.046	1.038

Table 11-17
UMTS 1900 Ant 4A Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	UMTS 1900 Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 4A Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	1.003	1.138	0.189	0.042	1.138**	1.192	1.045	1.192**	1.234
	Top	0.455	0.400*	0.079	0.400*	0.855	0.534	0.855	0.934	0.934
	Bottom	0.400*	0.417	0.400*	0.003	0.817	0.800	0.403	1.217	0.803
	Right	0.001	0.520	0.005	0.924	0.521	0.006	0.925	0.526	0.930
	Left	1.075	0.008	0.107	0.000	1.083	1.182	1.075	1.190	1.182

Table 11-18
LTE Band 66 (AWS) Ant 4A Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	LTE Band 66 (AWS) Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 4A Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	0.953	1.138	0.189	0.042	1.138**	1.142	0.995	1.142**	1.184
	Top	0.346	0.400*	0.079	0.400*	0.746	0.425	0.746	0.825	0.825
	Bottom	0.400*	0.417	0.400*	0.003	0.817	0.800	0.403	1.217	0.803
	Right	0.001	0.520	0.005	0.924	0.521	0.006	0.925	0.526	0.930
	Left	1.033	0.008	0.107	0.000	1.041	1.140	1.033	1.148	1.140

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 161 of 234

Table 11-19

LTE Band 25 (PCS) Ant 4A Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	LTE Band 25 (PCS) Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 4A Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	1.016	1.138	0.189	0.042	1.138**	1.205	1.058	1.205**	1.247
	Top	0.474	0.400*	0.079	0.400*	0.874	0.553	0.874	0.953	0.953
	Bottom	0.400*	0.417	0.400*	0.003	0.817	0.800	0.403	1.217	0.803
	Right	0.002	0.520	0.005	0.924	0.522	0.007	0.926	0.527	0.931
	Left	0.984	0.008	0.107	0.000	0.992	1.091	0.984	1.099	1.091

Table 11-20

LTE Band 30 Ant 4A Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	LTE Band 30 Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 4A Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	0.908	1.138	0.189	0.042	1.138**	1.097	0.950	1.138**	1.139
	Top	0.398	0.400*	0.079	0.400*	0.798	0.477	0.798	0.877	0.877
	Bottom	0.400*	0.417	0.400*	0.003	0.817	0.800	0.403	1.217	0.803
	Right	0.002	0.520	0.005	0.924	0.522	0.007	0.926	0.527	0.931
	Left	0.554	0.008	0.107	0.000	0.562	0.661	0.554	0.669	0.661

Table 11-21

LTE Band 7 Ant 4A Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	LTE Band 7 Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 4A Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	1.088	1.138	0.189	0.042	1.138**	1.277	1.130	1.277**	1.319
	Top	0.301	0.400*	0.079	0.400*	0.701	0.380	0.701	0.780	0.780
	Bottom	0.400*	0.417	0.400*	0.003	0.817	0.800	0.403	1.217	0.803
	Right	0.003	0.520	0.005	0.924	0.523	0.008	0.927	0.528	0.932
	Left	0.830	0.008	0.107	0.000	0.838	0.937	0.830	0.945	0.937

Table 11-22

LTE Band 41 Ant 4A Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	LTE Band 41 Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 4A Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	1.179	1.138	0.189	0.042	1.179**	1.368	1.221	1.368**	1.410
	Top	0.257	0.400*	0.079	0.400*	0.657	0.336	0.657	0.736	0.736
	Bottom	0.400*	0.417	0.400*	0.003	0.817	0.800	0.403	1.217	0.803
	Right	0.002	0.520	0.005	0.924	0.522	0.007	0.926	0.527	0.931
	Left	0.938	0.008	0.107	0.000	0.946	1.045	0.938	1.053	1.045

Table 11-23

GSM 1900 Ant 4B Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	GPRS 1900 Ant 4B SAR (W/kg)	2.4 GHz WLAN Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 4A Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	0.980	1.138	0.189	0.042	1.138**	1.169	1.022	1.169**	1.211
	Top	0.780	0.400*	0.079	0.400*	1.180	0.859	1.180	1.259	1.259
	Bottom	0.400*	0.417	0.400*	0.003	0.817	0.800	0.403	1.217	0.803
	Right	0.014	0.520	0.005	0.924	0.534	0.019	0.938	0.539	0.943
	Left	0.066	0.008	0.107	0.000	0.074	0.173	0.066	0.181	0.173

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 162 of 234

Table 11-24
UMTS 1750 Ant 4B Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	UMTS 1750 Ant 4B SAR (W/kg)	2.4 GHz WLAN Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 4A Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	1.046	1.138	0.189	0.042	1.138**	1.235	1.088	1.235**	1.277
	Top	0.786	0.400*	0.079	0.400*	1.186	0.865	1.186	1.265	1.265
	Bottom	0.400*	0.417	0.400*	0.003	0.817	0.800	0.403	1.217	0.803
	Right	0.011	0.520	0.005	0.924	0.531	0.016	0.935	0.536	0.940
	Left	0.069	0.008	0.107	0.000	0.077	0.176	0.069	0.184	0.176

Table 11-25
UMTS 1900 Ant 4B Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	UMTS 1900 Ant 4B SAR (W/kg)	2.4 GHz WLAN Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 4A Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	1.057	1.138	0.189	0.042	1.138**	1.246	1.099	1.246**	1.288
	Top	0.696	0.400*	0.079	0.400*	1.096	0.775	1.096	1.175	1.175
	Bottom	0.400*	0.417	0.400*	0.003	0.817	0.800	0.403	1.217	0.803
	Right	0.018	0.520	0.005	0.924	0.538	0.023	0.942	0.543	0.947
	Left	0.061	0.008	0.107	0.000	0.069	0.168	0.061	0.176	0.168

Table 11-26
LTE Band 66 (AWS) Ant 4B Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	LTE Band 66 (AWS) Ant 4B SAR (W/kg)	2.4 GHz WLAN Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 4A Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	1.009	1.138	0.189	0.042	1.138**	1.198	1.051	1.198**	1.240
	Top	0.678	0.400*	0.079	0.400*	1.078	0.757	1.078	1.157	1.157
	Bottom	0.400*	0.417	0.400*	0.003	0.817	0.800	0.403	1.217	0.803
	Right	0.010	0.520	0.005	0.924	0.530	0.015	0.934	0.535	0.939
	Left	0.051	0.008	0.107	0.000	0.059	0.158	0.051	0.166	0.158

Table 11-27
LTE Band 25 (PCS) Ant 4B Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	LTE Band 25 (PCS) Ant 4B SAR (W/kg)	2.4 GHz WLAN Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 4A Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	0.962	1.138	0.189	0.042	1.138**	1.151	1.004	1.151**	1.193
	Top	0.671	0.400*	0.079	0.400*	1.071	0.750	1.071	1.150	1.150
	Bottom	0.400*	0.417	0.400*	0.003	0.817	0.800	0.403	1.217	0.803
	Right	0.015	0.520	0.005	0.924	0.535	0.020	0.939	0.540	0.944
	Left	0.065	0.008	0.107	0.000	0.073	0.172	0.065	0.180	0.172

Table 11-28
LTE Band 30 Ant 4B Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	LTE Band 30 Ant 4B SAR (W/kg)	2.4 GHz WLAN Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 4A Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	0.484	1.138	0.189	0.042	1.138**	0.673	0.526	1.138**	0.715
	Top	0.797	0.400*	0.079	0.400*	1.197	0.876	1.197	1.276	1.276
	Bottom	0.400*	0.417	0.400*	0.003	0.817	0.800	0.403	1.217	0.803
	Right	0.018	0.520	0.005	0.924	0.538	0.023	0.942	0.543	0.947
	Left	0.049	0.008	0.107	0.000	0.057	0.156	0.049	0.164	0.156

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 163 of 234

Table 11-29
LTE Band 7 Ant 4B Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	LTE Band 7 Ant 4B SAR (W/kg)	2.4 GHz WLAN Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 4A Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	1.070	1.138	0.189	0.042	1.138**	1.259	1.112	1.259**	1.301
	Top	0.632	0.400*	0.079	0.400*	1.032	0.711	1.032	1.111	1.111
	Bottom	0.400*	0.417	0.400*	0.003	0.817	0.800	0.403	1.217	0.803
	Right	0.025	0.520	0.005	0.924	0.545	0.030	0.949	0.550	0.954
	Left	0.039	0.008	0.107	0.000	0.047	0.146	0.039	0.154	0.146

Table 11-30
LTE Band 41 Ant 4B Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	LTE Band 41 Ant 4B SAR (W/kg)	2.4 GHz WLAN Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 4A Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	1.179	1.138	0.189	0.042	1.179**	1.368	1.221	1.368**	1.410
	Top	0.755	0.400*	0.079	0.400*	1.155	0.834	1.155	1.234	1.234
	Bottom	0.400*	0.417	0.400*	0.003	0.817	0.800	0.403	1.217	0.803
	Right	0.031	0.520	0.005	0.924	0.551	0.036	0.955	0.556	0.960
	Left	0.044	0.008	0.107	0.000	0.052	0.151	0.044	0.159	0.151

Table 11-31
GSM 1900 Ant 2A Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	GPRS 1900 Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 2A Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 5 Reduced at 15.5 dBm SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	0.776	0.237	0.989	0.018	1.013	0.989**	0.794	1.013**	0.989**
	Top	0.400*	0.400*	0.376	0.004*	0.800	0.776	0.404	1.176	0.780
	Bottom	0.304	0.096	0.400*	0.000	0.400	0.704	0.304	0.800	0.704
	Right	0.723	0.124	0.005	0.419	0.847	0.728	1.142	0.852	1.147
	Left	0.400*	0.008	0.477	0.000	0.408	0.877	0.400	0.885	0.877

Table 11-32
UMTS 1750 Ant 2A Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	UMTS 1750 Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 2A Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 5 Reduced at 15.5 dBm SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	1.082	0.237	0.989	0.018	1.319	1.082**	1.100	1.319**	1.100**
	Top	0.400*	0.400*	0.376	0.004*	0.800	0.776	0.404	1.176	0.780
	Bottom	0.271	0.096	0.400*	0.000	0.367	0.671	0.271	0.767	0.671
	Right	0.926	0.124	0.005	0.419	1.050	0.931	1.345	1.055	1.350
	Left	0.400*	0.008	0.477	0.000	0.408	0.877	0.400	0.885	0.877

Table 11-33
UMTS 1900 Ant 2A Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	UMTS 1900 Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 2A Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 5 Reduced at 15.5 dBm SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	0.906	0.237	0.989	0.018	1.143	0.989**	0.924	1.143**	0.989**
	Top	0.400*	0.400*	0.376	0.004*	0.800	0.776	0.404	1.176	0.780
	Bottom	0.272	0.096	0.400*	0.000	0.368	0.672	0.272	0.768	0.672
	Right	0.810	0.124	0.005	0.419	0.934	0.815	1.229	0.939	1.234
	Left	0.400*	0.008	0.477	0.000	0.408	0.877	0.400	0.885	0.877

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 164 of 234

Table 11-34

LTE Band 66 (AWS) Ant 2A Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	LTE Band 66 (AWS) Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 2A Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 5 Reduced at 15.5 dBm SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	1.148	0.237	0.989	0.018	1.385	1.148**	1.166	1.385**	1.166**
	Top	0.400*	0.400*	0.376	0.004*	0.800	0.776	0.404	1.176	0.780
	Bottom	0.281	0.096	0.400*	0.000	0.377	0.681	0.281	0.777	0.681
	Right	0.878	0.124	0.005	0.419	1.002	0.883	1.297	1.007	1.302
	Left	0.400*	0.008	0.477	0.000	0.408	0.877	0.400	0.885	0.877

Table 11-35

LTE Band 25 (PCS) Ant 2A Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	LTE Band 25 (PCS) Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 2A Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 5 Reduced at 15.5 dBm SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	0.997	0.237	0.989	0.018	1.234	0.997**	1.015	1.234**	1.015**
	Top	0.400*	0.400*	0.376	0.004*	0.800	0.776	0.404	1.176	0.780
	Bottom	0.314	0.096	0.400*	0.000	0.410	0.714	0.314	0.810	0.714
	Right	0.900	0.124	0.005	0.419	1.024	0.905	1.319	1.029	1.324
	Left	0.400*	0.008	0.477	0.000	0.408	0.877	0.400	0.885	0.877

Table 11-36

LTE Band 30 Ant 2A Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	LTE Band 30 Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 2A Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 5 Reduced at 15.5 dBm SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	0.727	0.237	0.989	0.018	0.964	0.989**	0.745	0.989**	0.989**
	Top	0.400*	0.400*	0.376	0.004*	0.800	0.776	0.404	1.176	0.780
	Bottom	0.333	0.096	0.400*	0.000	0.429	0.733	0.333	0.829	0.733
	Right	0.716	0.124	0.005	0.419	0.840	0.721	1.135	0.845	1.140
	Left	0.400*	0.008	0.477	0.000	0.408	0.877	0.400	0.885	0.877

Table 11-37

LTE Band 7 Ant 2A Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	LTE Band 7 Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 2A Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 5 Reduced at 15.5 dBm SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	0.834	0.237	0.989	0.018	1.071	0.989**	0.852	1.071**	0.989**
	Top	0.400*	0.400*	0.376	0.004*	0.800	0.776	0.404	1.176	0.780
	Bottom	0.430	0.096	0.400*	0.000	0.526	0.830	0.430	0.926	0.830
	Right	0.651	0.124	0.005	0.419	0.775	0.656	1.070	0.780	1.075
	Left	0.400*	0.008	0.477	0.000	0.408	0.877	0.400	0.885	0.877

Table 11-38

LTE Band 41 Ant 2A Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	LTE Band 41 Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 2A Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 5 Reduced at 15.5 dBm SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	1.130	0.237	0.989	0.018	1.367	1.130**	1.148	1.367**	1.148**
	Top	0.400*	0.400*	0.376	0.004*	0.800	0.776	0.404	1.176	0.780
	Bottom	0.556	0.096	0.400*	0.000	0.652	0.956	0.556	1.052	0.956
	Right	0.654	0.124	0.005	0.419	0.778	0.659	1.073	0.783	1.078
	Left	0.400*	0.008	0.477	0.000	0.408	0.877	0.400	0.885	0.877

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 165 of 234

Table 11-39
GSM 1900 Ant 2B Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	GPRS 1900 Ant 2B SAR (W/kg)	2.4 GHz WLAN Ant 2A Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	0.807	0.237	0.989	0.042	1.044	0.989**	0.849	1.044**	0.989**
	Top	0.400*	0.400*	0.376	0.400*	0.800	0.776	0.800	1.176	1.176
	Bottom	0.538	0.096	0.400*	0.003	0.634	0.938	0.541	1.034	0.941
	Right	0.050	0.124	0.005	0.924	0.174	0.055	0.974	0.179	0.979
	Left	0.400*	0.008	0.477	0.000	0.408	0.877	0.400	0.885	0.877

Table 11-40
UMTS 1750 Ant 2B Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	UMTS 1750 Ant 2B SAR (W/kg)	2.4 GHz WLAN Ant 2A Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	0.995	0.237	0.989	0.042	1.232	0.995**	1.037	1.232**	1.037**
	Top	0.400*	0.400*	0.376	0.400*	0.800	0.776	0.800	1.176	1.176
	Bottom	0.608	0.096	0.400*	0.003	0.704	1.008	0.611	1.104	1.011
	Right	0.044	0.124	0.005	0.924	0.168	0.049	0.968	0.173	0.973
	Left	0.400*	0.008	0.477	0.000	0.408	0.877	0.400	0.885	0.877

Table 11-41
UMTS 1900 Ant 2B Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	UMTS 1900 Ant 2B SAR (W/kg)	2.4 GHz WLAN Ant 2A Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	0.864	0.237	0.989	0.042	1.101	0.989**	0.906	1.101**	0.989**
	Top	0.400*	0.400*	0.376	0.400*	0.800	0.776	0.800	1.176	1.176
	Bottom	0.657	0.096	0.400*	0.003	0.753	1.057	0.660	1.153	1.060
	Right	0.044	0.124	0.005	0.924	0.168	0.049	0.968	0.173	0.973
	Left	0.400*	0.008	0.477	0.000	0.408	0.877	0.400	0.885	0.877

Table 11-42
LTE Band 66 (AWS) Ant 2B Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	LTE Band 66 (AWS) Ant 2B SAR (W/kg)	2.4 GHz WLAN Ant 2A Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	0.934	0.237	0.989	0.042	1.171	0.989**	0.976	1.171**	0.989**
	Top	0.400*	0.400*	0.376	0.400*	0.800	0.776	0.800	1.176	1.176
	Bottom	0.531	0.096	0.400*	0.003	0.627	0.931	0.534	1.027	0.934
	Right	0.037	0.124	0.005	0.924	0.161	0.042	0.961	0.166	0.966
	Left	0.400*	0.008	0.477	0.000	0.408	0.877	0.400	0.885	0.877

Table 11-43
LTE Band 25 (PCS) Ant 2B Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	LTE Band 25 (PCS) Ant 2B SAR (W/kg)	2.4 GHz WLAN Ant 2A Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	0.955	0.237	0.989	0.042	1.192	0.989**	0.997	1.192**	0.997**
	Top	0.400*	0.400*	0.376	0.400*	0.800	0.776	0.800	1.176	1.176
	Bottom	0.636	0.096	0.400*	0.003	0.732	1.036	0.639	1.132	1.039
	Right	0.050	0.124	0.005	0.924	0.174	0.055	0.974	0.179	0.979
	Left	0.400*	0.008	0.477	0.000	0.408	0.877	0.400	0.885	0.877

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 166 of 234

Table 11-44
LTE Band 30 Ant 2B Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	LTE Band 30 Ant 2B SAR (W/kg)	2.4 GHz WLAN Ant 2A Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	1.101	0.237	0.989	0.042	1.338	1.101**	1.143	1.338**	1.143**
	Top	0.400*	0.400*	0.376	0.400*	0.800	0.776	0.800	1.176	1.176
	Bottom	0.614	0.096	0.400*	0.003	0.710	1.014	0.617	1.110	1.017
	Right	0.063	0.124	0.005	0.924	0.187	0.068	0.987	0.192	0.992
	Left	0.400*	0.008	0.477	0.000	0.408	0.877	0.400	0.885	0.877

Table 11-45
LTE Band 7 Ant 2B Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	LTE Band 7 Ant 2B SAR (W/kg)	2.4 GHz WLAN Ant 2A Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	1.138	0.237	0.989	0.042	1.375	1.138**	1.180	1.375**	1.180**
	Top	0.400*	0.400*	0.376	0.400*	0.800	0.776	0.800	1.176	1.176
	Bottom	0.613	0.096	0.400*	0.003	0.709	1.013	0.616	1.109	1.016
	Right	0.043	0.124	0.005	0.924	0.167	0.048	0.967	0.172	0.972
	Left	0.400*	0.008	0.477	0.000	0.408	0.877	0.400	0.885	0.877

Table 11-46
LTE Band 41 Ant 2B Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	LTE Band 41 Ant 2B SAR (W/kg)	2.4 GHz WLAN Ant 2A Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	1.103	0.237	0.989	0.042	1.340	1.103**	1.145	1.340**	1.145**
	Top	0.400*	0.400*	0.376	0.400*	0.800	0.776	0.800	1.176	1.176
	Bottom	0.450	0.096	0.400*	0.003	0.546	0.850	0.453	0.946	0.853
	Right	0.033	0.124	0.005	0.924	0.157	0.038	0.957	0.162	0.962
	Left	0.400*	0.008	0.477	0.000	0.408	0.877	0.400	0.885	0.877

Table 11-47
GSM 850 Ant 1 Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	GPRS 850 Ant 1 SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	0.524	0.091	0.111	0.615	0.635	0.726
	Top	0.400*	0.000	0.037	0.400	0.437	0.437
	Bottom	0.320	0.013	0.400*	0.333	0.720	0.733
	Right	0.007	1.128	1.029	1.135	1.036	1.135**
	Left	1.024	0.001	0.020	1.025	1.044	1.045

Table 11-48
UMTS 850 Ant 1 Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	UMTS 850 Ant 1 SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	0.682	0.091	0.111	0.773	0.793	0.884
	Top	0.400*	0.000	0.037	0.400	0.437	0.437
	Bottom	0.375	0.013	0.400*	0.388	0.775	0.788
	Right	0.016	1.128	1.029	1.144	1.045	1.144**
	Left	1.184	0.001	0.020	1.185	1.204	1.205

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 167 of 234

Table 11-49
LTE Band 12 Ant 1 Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	LTE Band 12 Ant 1 SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	0.576	0.091	0.111	0.667	0.687	0.778
	Top	0.400*	0.000	0.037	0.400	0.437	0.437
	Bottom	0.432	0.013	0.400*	0.445	0.832	0.845
	Right	0.006	1.128	1.029	1.134	1.035	1.134**
	Left	1.180	0.001	0.020	1.181	1.200	1.201

Table 11-50
LTE Band 13 Ant 1 Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	LTE Band 13 Ant 1 SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	0.843	0.091	0.111	0.934	0.954	1.045
	Top	0.400*	0.000	0.037	0.400	0.437	0.437
	Bottom	0.530	0.013	0.400*	0.543	0.930	0.943
	Right	0.010	1.128	1.029	1.138	1.039	1.138**
	Left	0.974	0.001	0.020	0.975	0.994	0.995

Table 11-51
LTE Band 14 Ant 1 Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	LTE Band 14 Ant 1 SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	0.869	0.091	0.111	0.960	0.980	1.071
	Top	0.400*	0.000	0.037	0.400	0.437	0.437
	Bottom	0.615	0.013	0.400*	0.628	1.015	1.028
	Right	0.013	1.128	1.029	1.141	1.042	1.141**
	Left	0.995	0.001	0.020	0.996	1.015	1.016

Table 11-52
LTE Band 5 (Cell) Ant 1 Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	LTE Band 5 (Cell) Ant 1 SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	0.905	0.091	0.111	0.996	1.016	1.107
	Top	0.400*	0.000	0.037	0.400	0.437	0.437
	Bottom	0.419	0.013	0.400*	0.432	0.819	0.832
	Right	0.013	1.128	1.029	1.141	1.042	1.141**
	Left	1.172	0.001	0.020	1.173	1.192	1.193

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 168 of 234

Table 11-53
LTE Band 26 (Cell) Ant 1 Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	LTE Band 26 (Cell) Ant 1 SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	0.901	0.091	0.111	0.992	1.012	1.103
	Top	0.400*	0.000	0.037	0.400	0.437	0.437
	Bottom	0.365	0.013	0.400*	0.378	0.765	0.778
	Right	0.006	1.128	1.029	1.134	1.035	1.134**
	Left	1.163	0.001	0.020	1.164	1.183	1.184

Table 11-54
GSM 850 Ant 3 Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	GPRS 850 Ant 3 SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 Reduced SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	1.044	0.091	0.022	1.135	1.066	1.157
	Top	0.500	0.000	0.000	0.500	0.500	0.500
	Bottom	0.400*	0.013	0.400*	0.413	0.800	0.813
	Right	0.830	1.128	0.274	1.128**	1.104	1.128**
	Left	0.400*	0.001	0.020	0.401	0.420	0.421

Table 11-55
UMTS 850 Ant 3 Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	UMTS 850 Ant 3 SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 Reduced SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	1.165	0.091	0.022	1.256	1.187	1.278
	Top	0.560	0.000	0.000	0.560	0.560	0.560
	Bottom	0.400*	0.013	0.400*	0.413	0.800	0.813
	Right	1.122	1.128	0.274	1.128**	1.396	1.396**
	Left	0.400*	0.001	0.020	0.401	0.420	0.421

Table 11-56
LTE Band 12 Ant 3 Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	LTE Band 12 Ant 3 SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 Reduced SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	1.090	0.091	0.022	1.181	1.112	1.203
	Top	0.507	0.000	0.000	0.507	0.507	0.507
	Bottom	0.400*	0.013	0.400*	0.413	0.800	0.813
	Right	0.931	1.128	0.274	1.128**	1.205	1.205**
	Left	0.400*	0.001	0.020	0.401	0.420	0.421

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 169 of 234

Table 11-57
LTE Band 13 Ant 3 Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	LTE Band 13 Ant 3 SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 Reduced SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	0.983	0.091	0.022	1.074	1.005	1.096
	Top	0.551	0.000	0.000	0.551	0.551	0.551
	Bottom	0.400*	0.013	0.400*	0.413	0.800	0.813
	Right	0.586	1.128	0.274	1.128**	0.860	1.128**
	Left	0.400*	0.001	0.020	0.401	0.420	0.421

Table 11-58
LTE Band 14 Ant 3 Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	LTE Band 14 Ant 3 SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 Reduced SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	0.894	0.091	0.022	0.985	0.916	1.007
	Top	0.519	0.000	0.000	0.519	0.519	0.519
	Bottom	0.400*	0.013	0.400*	0.413	0.800	0.813
	Right	0.587	1.128	0.274	1.128**	0.861	1.128**
	Left	0.400*	0.001	0.020	0.401	0.420	0.421

Table 11-59
LTE Band 5 (Cell) Ant 3 Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	LTE Band 5 (Cell) Ant 3 SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 Reduced SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	1.050	0.091	0.022	1.141	1.072	1.163
	Top	0.626	0.000	0.000	0.626	0.626	0.626
	Bottom	0.400*	0.013	0.400*	0.413	0.800	0.813
	Right	0.722	1.128	0.274	1.128**	0.996	1.128**
	Left	0.400*	0.001	0.020	0.401	0.420	0.421

Table 11-60
LTE Band 26 (Cell) Ant 3 Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	LTE Band 26 (Cell) Ant 3 SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 Reduced SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	1.159	0.091	0.022	1.250	1.181	1.272
	Top	0.484	0.000	0.000	0.484	0.484	0.484
	Bottom	0.400*	0.013	0.400*	0.413	0.800	0.813
	Right	1.160	1.128	0.274	1.160**	1.434	1.434**
	Left	0.400*	0.001	0.020	0.401	0.420	0.421

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 170 of 234

Table 11-61
GSM 1900 Ant 4A Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	GPRS 1900 Ant 4A SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	1.068	0.091	0.111	1.159	1.179	1.270
	Top	0.359	0.000	0.037	0.359	0.396	0.396
	Bottom	0.400*	0.013	0.400*	0.413	0.800	0.813
	Right	0.001	1.128	1.029	1.129	1.030	1.128**
	Left	0.881	0.001	0.020	0.882	0.901	0.902

Table 11-62
UMTS 1750 Ant 4A Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	UMTS 1750 Ant 4A SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	1.019	0.091	0.111	1.110	1.130	1.221
	Top	0.321	0.000	0.037	0.321	0.358	0.358
	Bottom	0.400*	0.013	0.400*	0.413	0.800	0.813
	Right	0.001	1.128	1.029	1.129	1.030	1.128**
	Left	0.931	0.001	0.020	0.932	0.951	0.952

Table 11-63
UMTS 1900 Ant 4A Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	UMTS 1900 Ant 4A SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	1.003	0.091	0.111	1.094	1.114	1.205
	Top	0.455	0.000	0.037	0.455	0.492	0.492
	Bottom	0.400*	0.013	0.400*	0.413	0.800	0.813
	Right	0.001	1.128	1.029	1.129	1.030	1.128**
	Left	1.075	0.001	0.020	1.076	1.095	1.096

Table 11-64
LTE Band 66 (AWS) Ant 4A Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	LTE Band 66 (AWS) Ant 4A SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	0.953	0.091	0.111	1.044	1.064	1.155
	Top	0.346	0.000	0.037	0.346	0.383	0.383
	Bottom	0.400*	0.013	0.400*	0.413	0.800	0.813
	Right	0.001	1.128	1.029	1.129	1.030	1.128**
	Left	1.033	0.001	0.020	1.034	1.053	1.054

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 171 of 234

Table 11-65

LTE Band 25 (PCS) Ant 4A Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	LTE Band 25 (PCS) Ant 4A SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	1.016	0.091	0.111	1.107	1.127	1.218
	Top	0.474	0.000	0.037	0.474	0.511	0.511
	Bottom	0.400*	0.013	0.400*	0.413	0.800	0.813
	Right	0.002	1.128	1.029	1.130	1.031	1.128**
	Left	0.984	0.001	0.020	0.985	1.004	1.005

Table 11-66

LTE Band 30 Ant 4A Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	LTE Band 30 Ant 4A SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	0.908	0.091	0.111	0.999	1.019	1.110
	Top	0.398	0.000	0.037	0.398	0.435	0.435
	Bottom	0.400*	0.013	0.400*	0.413	0.800	0.813
	Right	0.002	1.128	1.029	1.130	1.031	1.128**
	Left	0.554	0.001	0.020	0.555	0.574	0.575

Table 11-67

LTE Band 7 Ant 4A Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	LTE Band 7 Ant 4A SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	1.088	0.091	0.111	1.179	1.199	1.290
	Top	0.301	0.000	0.037	0.301	0.338	0.338
	Bottom	0.400*	0.013	0.400*	0.413	0.800	0.813
	Right	0.003	1.128	1.029	1.131	1.032	1.128**
	Left	0.830	0.001	0.020	0.831	0.850	0.851

Table 11-68

LTE Band 41 Ant 4A Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	LTE Band 41 Ant 4A SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	1.179	0.091	0.111	1.270	1.290	1.381
	Top	0.257	0.000	0.037	0.257	0.294	0.294
	Bottom	0.400*	0.013	0.400*	0.413	0.800	0.813
	Right	0.002	1.128	1.029	1.130	1.031	1.128**
	Left	0.938	0.001	0.020	0.939	0.958	0.959

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 172 of 234

Table 11-69
GSM 1900 Ant 4B Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	GPRS 1900 Ant 4B SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	0.980	0.091	0.111	1.071	1.091	1.182
	Top	0.780	0.000	0.037	0.780	0.817	0.817
	Bottom	0.400*	0.013	0.400*	0.413	0.800	0.813
	Right	0.014	1.128	1.029	1.142	1.043	1.128**
	Left	0.066	0.001	0.020	0.067	0.086	0.087

Table 11-70
UMTS 1750 Ant 4B Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	UMTS 1750 Ant 4B SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	1.046	0.091	0.111	1.137	1.157	1.248
	Top	0.786	0.000	0.037	0.786	0.823	0.823
	Bottom	0.400*	0.013	0.400*	0.413	0.800	0.813
	Right	0.011	1.128	1.029	1.139	1.040	1.128**
	Left	0.069	0.001	0.020	0.070	0.089	0.090

Table 11-71
UMTS 1900 Ant 4B Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	UMTS 1900 Ant 4B SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	1.057	0.091	0.111	1.148	1.168	1.259
	Top	0.696	0.000	0.037	0.696	0.733	0.733
	Bottom	0.400*	0.013	0.400*	0.413	0.800	0.813
	Right	0.018	1.128	1.029	1.146	1.047	1.128**
	Left	0.061	0.001	0.020	0.062	0.081	0.082

Table 11-72
LTE Band 66 (AWS) Ant 4B Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	LTE Band 66 (AWS) Ant 4B SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	1.009	0.091	0.111	1.100	1.120	1.211
	Top	0.678	0.000	0.037	0.678	0.715	0.715
	Bottom	0.400*	0.013	0.400*	0.413	0.800	0.813
	Right	0.010	1.128	1.029	1.138	1.039	1.128**
	Left	0.051	0.001	0.020	0.052	0.071	0.072

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 173 of 234

Table 11-73

LTE Band 25 (PCS) Ant 4B Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	LTE Band 25 (PCS) Ant 4B SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	0.962	0.091	0.111	1.053	1.073	1.164
	Top	0.671	0.000	0.037	0.671	0.708	0.708
	Bottom	0.400*	0.013	0.400*	0.413	0.800	0.813
	Right	0.015	1.128	1.029	1.143	1.044	1.128**
	Left	0.065	0.001	0.020	0.066	0.085	0.086

Table 11-74

LTE Band 30 Ant 4B Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	LTE Band 30 Ant 4B SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	0.484	0.091	0.111	0.575	0.595	0.686
	Top	0.797	0.000	0.037	0.797	0.834	0.834
	Bottom	0.400*	0.013	0.400*	0.413	0.800	0.813
	Right	0.018	1.128	1.029	1.146	1.047	1.128**
	Left	0.049	0.001	0.020	0.050	0.069	0.070

Table 11-75

LTE Band 7 Ant 4B Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	LTE Band 7 Ant 4B SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	1.070	0.091	0.111	1.161	1.181	1.272
	Top	0.632	0.000	0.037	0.632	0.669	0.669
	Bottom	0.400*	0.013	0.400*	0.413	0.800	0.813
	Right	0.025	1.128	1.029	1.153	1.054	1.128**
	Left	0.039	0.001	0.020	0.040	0.059	0.060

Table 11-76

LTE Band 41 Ant 4B Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	LTE Band 41 Ant 4B SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	1.179	0.091	0.111	1.270	1.290	1.381
	Top	0.755	0.000	0.037	0.755	0.792	0.792
	Bottom	0.400*	0.013	0.400*	0.413	0.800	0.813
	Right	0.031	1.128	1.029	1.159	1.060	1.128**
	Left	0.044	0.001	0.020	0.045	0.064	0.065

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 174 of 234

Table 11-77
GSM 1900 Ant 2A Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	GPRS 1900 Ant 2A SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	0.776	0.014	0.111	0.790	0.887	0.901
	Top	0.400*	0.000	0.037	0.400	0.437	0.437
	Bottom	0.304	0.000	0.400*	0.304	0.704	0.704
	Right	0.723	0.199	1.029	0.922	1.029**	1.029**
	Left	0.400*	0.001	0.020	0.401	0.420	0.421

Table 11-78
UMTS 1750 Ant 2A Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	UMTS 1750 Ant 2A SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	1.082	0.014	0.111	1.096	1.193	1.207
	Top	0.400*	0.000	0.037	0.400	0.437	0.437
	Bottom	0.271	0.000	0.400*	0.271	0.671	0.671
	Right	0.926	0.199	1.029	1.125	1.029**	1.125**
	Left	0.400*	0.001	0.020	0.401	0.420	0.421

Table 11-79
UMTS 1900 Ant 2A Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	UMTS 1900 Ant 2A SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	0.906	0.014	0.111	0.920	1.017	1.031
	Top	0.400*	0.000	0.037	0.400	0.437	0.437
	Bottom	0.272	0.000	0.400*	0.272	0.672	0.672
	Right	0.810	0.199	1.029	1.009	1.029**	1.029**
	Left	0.400*	0.001	0.020	0.401	0.420	0.421

Table 11-80
LTE Band 66 (AWS) Ant 2A Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	LTE Band 66 (AWS) Ant 2A SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	1.148	0.014	0.111	1.162	1.259	1.273
	Top	0.400*	0.000	0.037	0.400	0.437	0.437
	Bottom	0.281	0.000	0.400*	0.281	0.681	0.681
	Right	0.878	0.199	1.029	1.077	1.029**	1.077**
	Left	0.400*	0.001	0.020	0.401	0.420	0.421

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 175 of 234

Table 11-81

LTE Band 25 (PCS) Ant 2A Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	LTE Band 25 (PCS) Ant 2A SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	0.997	0.014	0.111	1.011	1.108	1.122
	Top	0.400*	0.000	0.037	0.400	0.437	0.437
	Bottom	0.314	0.000	0.400*	0.314	0.714	0.714
	Right	0.900	0.199	1.029	1.099	1.029**	1.099**
	Left	0.400*	0.001	0.020	0.401	0.420	0.421

Table 11-82

LTE Band 30 Ant 2A Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	LTE Band 30 Ant 2A SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	0.727	0.014	0.111	0.741	0.838	0.852
	Top	0.400*	0.000	0.037	0.400	0.437	0.437
	Bottom	0.333	0.000	0.400*	0.333	0.733	0.733
	Right	0.716	0.199	1.029	0.915	1.029**	1.029**
	Left	0.400*	0.001	0.020	0.401	0.420	0.421

Table 11-83

LTE Band 7 Ant 2A Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	LTE Band 7 Ant 2A SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	0.834	0.014	0.111	0.848	0.945	0.959
	Top	0.400*	0.000	0.037	0.400	0.437	0.437
	Bottom	0.430	0.000	0.400*	0.430	0.830	0.830
	Right	0.651	0.199	1.029	0.850	1.029**	1.029**
	Left	0.400*	0.001	0.020	0.401	0.420	0.421

Table 11-84

LTE Band 41 Ant 2A Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	LTE Band 41 Ant 2A SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	1.130	0.014	0.111	1.144	1.241	1.255
	Top	0.400*	0.000	0.037	0.400	0.437	0.437
	Bottom	0.556	0.000	0.400*	0.556	0.956	0.956
	Right	0.654	0.199	1.029	0.853	1.029**	1.029**
	Left	0.400*	0.001	0.020	0.401	0.420	0.421

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 176 of 234

Table 11-85
GSM 1900 Ant 2B Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	GPRS 1900 Ant 2B SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	0.807	0.091	0.111	0.898	0.918	1.009
	Top	0.400*	0.000	0.037	0.400	0.437	0.437
	Bottom	0.538	0.013	0.400*	0.551	0.938	0.951
	Right	0.050	1.128	1.029	1.178	1.079	1.178**
	Left	0.400*	0.001	0.020	0.401	0.420	0.421

Table 11-86
UMTS 1750 Ant 2B Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	UMTS 1750 Ant 2B SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	0.995	0.091	0.111	1.086	1.106	1.197
	Top	0.400*	0.000	0.037	0.400	0.437	0.437
	Bottom	0.608	0.013	0.400*	0.621	1.008	1.021
	Right	0.044	1.128	1.029	1.172	1.073	1.172**
	Left	0.400*	0.001	0.020	0.401	0.420	0.421

Table 11-87
UMTS 1900 Ant 2B Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	UMTS 1900 Ant 2B SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	0.864	0.091	0.111	0.955	0.975	1.066
	Top	0.400*	0.000	0.037	0.400	0.437	0.437
	Bottom	0.657	0.013	0.400*	0.670	1.057	1.070
	Right	0.044	1.128	1.029	1.172	1.073	1.172**
	Left	0.400*	0.001	0.020	0.401	0.420	0.421

Table 11-88
LTE Band 66 (AWS) Ant 2B Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	LTE Band 66 (AWS) Ant 2B SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	0.934	0.091	0.111	1.025	1.045	1.136
	Top	0.400*	0.000	0.037	0.400	0.437	0.437
	Bottom	0.531	0.013	0.400*	0.544	0.931	0.944
	Right	0.037	1.128	1.029	1.165	1.066	1.165**
	Left	0.400*	0.001	0.020	0.401	0.420	0.421

FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 177 of 234

Table 11-89

LTE Band 25 (PCS) Ant 2B Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	LTE Band 25 (PCS) Ant 2B SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	0.955	0.091	0.111	1.046	1.066	1.157
	Top	0.400*	0.000	0.037	0.400	0.437	0.437
	Bottom	0.636	0.013	0.400*	0.649	1.036	1.049
	Right	0.050	1.128	1.029	1.178	1.079	1.178**
	Left	0.400*	0.001	0.020	0.401	0.420	0.421

Table 11-90

LTE Band 30 Ant 2B Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	LTE Band 30 Ant 2B SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	1.101	0.091	0.111	1.192	1.212	1.303
	Top	0.400*	0.000	0.037	0.400	0.437	0.437
	Bottom	0.614	0.013	0.400*	0.627	1.014	1.027
	Right	0.063	1.128	1.029	1.191	1.092	1.191**
	Left	0.400*	0.001	0.020	0.401	0.420	0.421

Table 11-91

LTE Band 7 Ant 2B Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	LTE Band 7 Ant 2B SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	1.138	0.091	0.111	1.229	1.249	1.340
	Top	0.400*	0.000	0.037	0.400	0.437	0.437
	Bottom	0.613	0.013	0.400*	0.626	1.013	1.026
	Right	0.043	1.128	1.029	1.171	1.072	1.171**
	Left	0.400*	0.001	0.020	0.401	0.420	0.421

Table 11-92

LTE Band 41 Ant 2B Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	LTE Band 41 Ant 2B SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	1.103	0.091	0.111	1.194	1.214	1.305
	Top	0.400*	0.000	0.037	0.400	0.437	0.437
	Bottom	0.450	0.013	0.400*	0.463	0.850	0.863
	Right	0.033	1.128	1.029	1.161	1.062	1.161**
	Left	0.400*	0.001	0.020	0.401	0.420	0.421

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 178 of 234

Table 11-93
GSM 850 Ant 1 Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	GPRS 850 Ant 1 SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	Bluetooth Ant 5 at 17.0 dBm SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	0.524	0.234	1.028	0.011	0.758	1.552	0.535
	Top	0.400*	0.400*	0.408	0.400*	0.800	0.808	0.800
	Bottom	0.320	0.087	0.400*	0.001	0.407	0.720	0.321
	Right	0.007	0.148	0.003	0.334	0.155	0.010	0.341
	Left	1.024	0.003	0.787	0.000	1.027	1.024**	1.024

Table 11-94
UMTS 850 Ant 1 Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	UMTS 850 Ant 1 SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	Bluetooth Ant 5 at 17.0 dBm SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	0.682	0.234	1.028	0.011	0.916	1.028**	0.693
	Top	0.400*	0.400*	0.408	0.400*	0.800	0.808	0.800
	Bottom	0.375	0.087	0.400*	0.001	0.462	0.775	0.376
	Right	0.016	0.148	0.003	0.334	0.164	0.019	0.350
	Left	1.184	0.003	0.787	0.000	1.187	1.184**	1.184

Table 11-95
LTE Band 12 Ant 1 Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	LTE Band 12 Ant 1 SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	Bluetooth Ant 5 at 17.0 dBm SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	0.576	0.234	1.028	0.011	0.810	1.028**	0.587
	Top	0.400*	0.400*	0.408	0.400*	0.800	0.808	0.800
	Bottom	0.432	0.087	0.400*	0.001	0.519	0.832	0.433
	Right	0.006	0.148	0.003	0.334	0.154	0.009	0.340
	Left	1.180	0.003	0.787	0.000	1.183	1.180**	1.180

Table 11-96
LTE Band 13 Ant 1 Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	LTE Band 13 Ant 1 SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	Bluetooth Ant 5 at 17.0 dBm SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	0.843	0.234	1.028	0.011	1.077	1.028**	0.854
	Top	0.400*	0.400*	0.408	0.400*	0.800	0.808	0.800
	Bottom	0.530	0.087	0.400*	0.001	0.617	0.930	0.531
	Right	0.010	0.148	0.003	0.334	0.158	0.013	0.344
	Left	0.974	0.003	0.787	0.000	0.977	0.974**	0.974

Table 11-97
LTE Band 14 Ant 1 Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	LTE Band 14 Ant 1 SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	Bluetooth Ant 5 at 17.0 dBm SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	0.869	0.234	1.028	0.011	1.103	1.028**	0.880
	Top	0.400*	0.400*	0.408	0.400*	0.800	0.808	0.800
	Bottom	0.615	0.087	0.400*	0.001	0.702	1.015	0.616
	Right	0.013	0.148	0.003	0.334	0.161	0.016	0.347
	Left	0.995	0.003	0.787	0.000	0.998	0.995**	0.995

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 179 of 234

Table 11-98
LTE Band 5 (Cell) Ant 1 Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	LTE Band 5 (Cell) Ant 1 SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	Bluetooth Ant 5 at 17.0 dBm SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	0.905	0.234	1.028	0.011	1.139	1.028**	0.916
	Top	0.400*	0.400*	0.408	0.400*	0.800	0.808	0.800
	Bottom	0.419	0.087	0.400*	0.001	0.506	0.819	0.420
	Right	0.013	0.148	0.003	0.334	0.161	0.016	0.347
	Left	1.172	0.003	0.787	0.000	1.175	1.172**	1.172

Table 11-99
LTE Band 26 (Cell) Ant 1 Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	LTE Band 26 (Cell) Ant 1 SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	Bluetooth Ant 5 at 17.0 dBm SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	0.901	0.234	1.028	0.011	1.135	1.028**	0.912
	Top	0.400*	0.400*	0.408	0.400*	0.800	0.808	0.800
	Bottom	0.365	0.087	0.400*	0.001	0.452	0.765	0.366
	Right	0.006	0.148	0.003	0.334	0.154	0.009	0.340
	Left	1.163	0.003	0.787	0.000	1.166	1.163**	1.163

Table 11-100
GSM 850 Ant 3 Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	GPRS 850 Ant 3 SAR (W/kg)	Bluetooth Ant 2a SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	Bluetooth Ant 5 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	1.044	1.069	0.168	0.018	1.069**	1.212	1.062
	Top	0.500	0.400*	0.065	0.400*	0.900	0.565	0.900
	Bottom	0.400*	0.300	0.400*	0.001	0.700	0.800	0.401
	Right	0.830	0.598	0.003	0.727	1.428	0.833	1.557
	Left	0.400*	0.003	0.102	0.000	0.403	0.502	0.400

Table 11-101
UMTS 850 Ant 3 Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	UMTS 850 Ant 3 SAR (W/kg)	Bluetooth Ant 2a SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	Bluetooth Ant 5 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	1.165	1.069	0.168	0.018	1.165**	1.333	1.183
	Top	0.560	0.400*	0.065	0.400*	0.960	0.625	0.960
	Bottom	0.400*	0.300	0.400*	0.001	0.700	0.800	0.401
	Right	1.122	0.598	0.003	0.727	1.122**	1.125	1.122**
	Left	0.400*	0.003	0.102	0.000	0.403	0.502	0.400

Table 11-102
LTE Band 12 Ant 3 Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	LTE Band 12 Ant 3 SAR (W/kg)	Bluetooth Ant 2a SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	Bluetooth Ant 5 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	1.090	1.069	0.168	0.018	1.090**	1.258	1.108
	Top	0.507	0.400*	0.065	0.400*	0.907	0.572	0.907
	Bottom	0.400*	0.300	0.400*	0.001	0.700	0.800	0.401
	Right	0.931	0.598	0.003	0.727	1.529	0.934	0.931**
	Left	0.400*	0.003	0.102	0.000	0.403	0.502	0.400

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 180 of 234

Table 11-103
LTE Band 13 Ant 3 Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	LTE Band 13 Ant 3 SAR (W/kg)	Bluetooth Ant 2a SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	Bluetooth Ant 5 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	0.983	1.069	0.168	0.018	1.069**	1.151	1.001
	Top	0.551	0.400*	0.065	0.400*	0.951	0.616	0.951
	Bottom	0.400*	0.300	0.400*	0.001	0.700	0.800	0.401
	Right	0.586	0.598	0.003	0.727	1.184	0.589	1.313
	Left	0.400*	0.003	0.102	0.000	0.403	0.502	0.400

Table 11-104
LTE Band 14 Ant 3 Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	LTE Band 14 Ant 3 SAR (W/kg)	Bluetooth Ant 2a SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	Bluetooth Ant 5 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	0.894	1.069	0.168	0.018	1.069**	1.062	0.912
	Top	0.519	0.400*	0.065	0.400*	0.919	0.584	0.919
	Bottom	0.400*	0.300	0.400*	0.001	0.700	0.800	0.401
	Right	0.587	0.598	0.003	0.727	1.185	0.590	1.314
	Left	0.400*	0.003	0.102	0.000	0.403	0.502	0.400

Table 11-105
LTE Band 5 (Cell) Ant 3 Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	LTE Band 5 (Cell) Ant 3 SAR (W/kg)	Bluetooth Ant 2a SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	Bluetooth Ant 5 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	1.050	1.069	0.168	0.018	1.069**	1.218	1.068
	Top	0.626	0.400*	0.065	0.400*	1.026	0.691	1.026
	Bottom	0.400*	0.300	0.400*	0.001	0.700	0.800	0.401
	Right	0.722	0.598	0.003	0.727	1.320	0.725	1.449
	Left	0.400*	0.003	0.102	0.000	0.403	0.502	0.400

Table 11-106
LTE Band 26 (Cell) Ant 3 Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	LTE Band 26 (Cell) Ant 3 SAR (W/kg)	Bluetooth Ant 2a SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	Bluetooth Ant 5 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	1.159	1.069	0.168	0.018	1.159**	1.327	1.177
	Top	0.484	0.400*	0.065	0.400*	0.884	0.549	0.884
	Bottom	0.400*	0.300	0.400*	0.001	0.700	0.800	0.401
	Right	1.160	0.598	0.003	0.727	1.160**	1.163	1.160**
	Left	0.400*	0.003	0.102	0.000	0.403	0.502	0.400

Table 11-107
GSM 1900 Ant 4A Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	GPRS 1900 Ant 4A SAR (W/kg)	Bluetooth Ant 2a SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	Bluetooth Ant 5 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	1.068	1.069	0.168	0.018	1.069**	1.236	1.086
	Top	0.359	0.400*	0.065	0.400*	0.759	0.424	0.759
	Bottom	0.400*	0.300	0.400*	0.001	0.700	0.800	0.401
	Right	0.001	0.598	0.003	0.727	0.599	0.004	0.728
	Left	0.881	0.003	0.102	0.000	0.884	0.983	0.881

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 181 of 234

Table 11-108
UMTS 1750 Ant 4A Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	UMTS 1750 Ant 4A SAR (W/kg)	Bluetooth Ant 2a SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	Bluetooth Ant 5 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	1.019	1.069	0.168	0.018	1.069**	1.187	1.037
	Top	0.321	0.400*	0.065	0.400*	0.721	0.386	0.721
	Bottom	0.400*	0.300	0.400*	0.001	0.700	0.800	0.401
	Right	0.001	0.598	0.003	0.727	0.599	0.004	0.728
	Left	0.931	0.003	0.102	0.000	0.934	1.033	0.931

Table 11-109
UMTS 1900 Ant 4A Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	UMTS 1900 Ant 4A SAR (W/kg)	Bluetooth Ant 2a SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	Bluetooth Ant 5 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	1.003	1.069	0.168	0.018	1.069**	1.171	1.021
	Top	0.455	0.400*	0.065	0.400*	0.855	0.520	0.855
	Bottom	0.400*	0.300	0.400*	0.001	0.700	0.800	0.401
	Right	0.001	0.598	0.003	0.727	0.599	0.004	0.728
	Left	1.075	0.003	0.102	0.000	1.078	1.177	1.075

Table 11-110
LTE Band 66 (AWS) Ant 4A Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	LTE Band 66 (AWS) Ant 4A SAR (W/kg)	Bluetooth Ant 2a SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	Bluetooth Ant 5 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	0.953	1.069	0.168	0.018	1.069**	1.121	0.971
	Top	0.346	0.400*	0.065	0.400*	0.746	0.411	0.746
	Bottom	0.400*	0.300	0.400*	0.001	0.700	0.800	0.401
	Right	0.001	0.598	0.003	0.727	0.599	0.004	0.728
	Left	1.033	0.003	0.102	0.000	1.036	1.135	1.033

Table 11-111
LTE Band 25 (PCS) Ant 4A Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	LTE Band 25 (PCS) Ant 4A SAR (W/kg)	Bluetooth Ant 2a SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	Bluetooth Ant 5 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	1.016	1.069	0.168	0.018	1.069**	1.184	1.034
	Top	0.474	0.400*	0.065	0.400*	0.874	0.539	0.874
	Bottom	0.400*	0.300	0.400*	0.001	0.700	0.800	0.401
	Right	0.002	0.598	0.003	0.727	0.600	0.005	0.729
	Left	0.984	0.003	0.102	0.000	0.987	1.086	0.984

Table 11-112
LTE Band 30 Ant 4A Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	LTE Band 30 Ant 4A SAR (W/kg)	Bluetooth Ant 2a SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	Bluetooth Ant 5 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	0.908	1.069	0.168	0.018	1.069**	1.076	0.926
	Top	0.398	0.400*	0.065	0.400*	0.798	0.463	0.798
	Bottom	0.400*	0.300	0.400*	0.001	0.700	0.800	0.401
	Right	0.002	0.598	0.003	0.727	0.600	0.005	0.729
	Left	0.554	0.003	0.102	0.000	0.557	0.656	0.554

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 182 of 234

Table 11-113
LTE Band 7 Ant 4A Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	LTE Band 7 Ant 4A SAR (W/kg)	Bluetooth Ant 2a SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	Bluetooth Ant 5 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	1.088	1.069	0.168	0.018	1.088**	1.256	1.106
	Top	0.301	0.400*	0.065	0.400*	0.701	0.366	0.701
	Bottom	0.400*	0.300	0.400*	0.001	0.700	0.800	0.401
	Right	0.003	0.598	0.003	0.727	0.601	0.006	0.730
	Left	0.830	0.003	0.102	0.000	0.833	0.932	0.830

Table 11-114
LTE Band 41 Ant 4A Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	LTE Band 41 Ant 4A SAR (W/kg)	Bluetooth Ant 2a SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	Bluetooth Ant 5 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	1.179	1.069	0.168	0.018	1.179**	1.347	1.197
	Top	0.257	0.400*	0.065	0.400*	0.657	0.322	0.657
	Bottom	0.400*	0.300	0.400*	0.001	0.700	0.800	0.401
	Right	0.002	0.598	0.003	0.727	0.600	0.005	0.729
	Left	0.938	0.003	0.102	0.000	0.941	1.040	0.938

Table 11-115
GSM 1900 Ant 4B Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	GPRS 1900 Ant 4B SAR (W/kg)	Bluetooth Ant 2a SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	Bluetooth Ant 5 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	0.980	1.069	0.168	0.018	1.069**	1.148	0.998
	Top	0.780	0.400*	0.065	0.400*	1.180	0.845	1.180
	Bottom	0.400*	0.300	0.400*	0.001	0.700	0.800	0.401
	Right	0.014	0.598	0.003	0.727	0.612	0.017	0.741
	Left	0.066	0.003	0.102	0.000	0.069	0.168	0.066

Table 11-116
UMTS 1750 Ant 4B Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	UMTS 1750 Ant 4B SAR (W/kg)	Bluetooth Ant 2a SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	Bluetooth Ant 5 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	1.046	1.069	0.168	0.018	1.069**	1.214	1.064
	Top	0.786	0.400*	0.065	0.400*	1.186	0.851	1.186
	Bottom	0.400*	0.300	0.400*	0.001	0.700	0.800	0.401
	Right	0.011	0.598	0.003	0.727	0.609	0.014	0.738
	Left	0.069	0.003	0.102	0.000	0.072	0.171	0.069

Table 11-117
UMTS 1900 Ant 4B Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	UMTS 1900 Ant 4B SAR (W/kg)	Bluetooth Ant 2a SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	Bluetooth Ant 5 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	1.057	1.069	0.168	0.018	1.069**	1.225	1.075
	Top	0.696	0.400*	0.065	0.400*	1.096	0.761	1.096
	Bottom	0.400*	0.300	0.400*	0.001	0.700	0.800	0.401
	Right	0.018	0.598	0.003	0.727	0.616	0.021	0.745
	Left	0.061	0.003	0.102	0.000	0.064	0.163	0.061

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 183 of 234

Table 11-118

LTE Band 66 (AWS) Ant 4B Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	LTE Band 66 (AWS) Ant 4B SAR (W/kg)	Bluetooth Ant 2a SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	Bluetooth Ant 5 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	1.009	1.069	0.168	0.018	1.069**	1.177	1.027
	Top	0.678	0.400*	0.065	0.400*	1.078	0.743	1.078
	Bottom	0.400*	0.300	0.400*	0.001	0.700	0.800	0.401
	Right	0.010	0.598	0.003	0.727	0.608	0.013	0.737
	Left	0.051	0.003	0.102	0.000	0.054	0.153	0.051

Table 11-119

LTE Band 25 (PCS) Ant 4B Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	LTE Band 25 (PCS) Ant 4B SAR (W/kg)	Bluetooth Ant 2a SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	Bluetooth Ant 5 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	0.962	1.069	0.168	0.018	1.069**	1.130	0.980
	Top	0.671	0.400*	0.065	0.400*	1.071	0.736	1.071
	Bottom	0.400*	0.300	0.400*	0.001	0.700	0.800	0.401
	Right	0.015	0.598	0.003	0.727	0.613	0.018	0.742
	Left	0.065	0.003	0.102	0.000	0.068	0.167	0.065

Table 11-120

LTE Band 30 Ant 4B Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	LTE Band 30 Ant 4B SAR (W/kg)	Bluetooth Ant 2a SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	Bluetooth Ant 5 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	0.484	1.069	0.168	0.018	1.553	0.652	0.502
	Top	0.797	0.400*	0.065	0.400*	1.197	0.862	1.197
	Bottom	0.400*	0.300	0.400*	0.001	0.700	0.800	0.401
	Right	0.018	0.598	0.003	0.727	0.616	0.021	0.745
	Left	0.049	0.003	0.102	0.000	0.052	0.151	0.049

Table 11-121

LTE Band 7 Ant 4B Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	LTE Band 7 Ant 4B SAR (W/kg)	Bluetooth Ant 2a SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	Bluetooth Ant 5 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	1.070	1.069	0.168	0.018	1.070**	1.238	1.088
	Top	0.632	0.400*	0.065	0.400*	1.032	0.697	1.032
	Bottom	0.400*	0.300	0.400*	0.001	0.700	0.800	0.401
	Right	0.025	0.598	0.003	0.727	0.623	0.028	0.752
	Left	0.039	0.003	0.102	0.000	0.042	0.141	0.039

Table 11-122

LTE Band 41 Ant 4B Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	LTE Band 41 Ant 4B SAR (W/kg)	Bluetooth Ant 2a SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	Bluetooth Ant 5 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	1.179	1.069	0.168	0.018	1.179**	1.347	1.197
	Top	0.755	0.400*	0.065	0.400*	1.155	0.820	1.155
	Bottom	0.400*	0.300	0.400*	0.001	0.700	0.800	0.401
	Right	0.031	0.598	0.003	0.727	0.629	0.034	0.758
	Left	0.044	0.003	0.102	0.000	0.047	0.146	0.044

FCC ID: BCGA1934

**SAR EVALUATION REPORT****Approved by:**

Quality Manager

Document S/N:

1C1806220015-01-R2.BCG

Test Dates:

08/13/18-09/13/18

DUT Type:

Tablet Device

Page 184 of 234

Table 11-123
GSM 1900 Ant 2A Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	GPRS 1900 Ant 2A SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	Bluetooth Ant 5 at 17.0 dBm SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	0.776	0.234	1.028	0.011	1.010	1.028**	0.787
	Top	0.400*	0.400*	0.408	0.400*	0.800	0.808	0.800
	Bottom	0.304	0.087	0.400*	0.001	0.391	0.704	0.305
	Right	0.723	0.148	0.003	0.334	0.871	0.726	1.057
	Left	0.400*	0.003	0.787	0.000	0.403	1.187	0.400

Table 11-124
UMTS 1750 Ant 2A Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	UMTS 1750 Ant 2A SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	Bluetooth Ant 5 at 17.0 dBm SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	1.082	0.234	1.028	0.011	1.316	1.082**	1.093
	Top	0.400*	0.400*	0.408	0.400*	0.800	0.808	0.800
	Bottom	0.271	0.087	0.400*	0.001	0.358	0.671	0.272
	Right	0.926	0.148	0.003	0.334	1.074	0.929	1.260
	Left	0.400*	0.003	0.787	0.000	0.403	1.187	0.400

Table 11-125
UMTS 1900 Ant 2A Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	UMTS 1900 Ant 2A SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	Bluetooth Ant 5 at 17.0 dBm SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	0.906	0.234	1.028	0.011	1.140	1.028**	0.917
	Top	0.400*	0.400*	0.408	0.400*	0.800	0.808	0.800
	Bottom	0.272	0.087	0.400*	0.001	0.359	0.672	0.273
	Right	0.810	0.148	0.003	0.334	0.958	0.813	1.144
	Left	0.400*	0.003	0.787	0.000	0.403	1.187	0.400

Table 11-126
LTE Band 66 (AWS) Ant 2A Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	LTE Band 66 (AWS) Ant 2A SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	Bluetooth Ant 5 at 17.0 dBm SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	1.148	0.234	1.028	0.011	1.382	1.148**	1.159
	Top	0.400*	0.400*	0.408	0.400*	0.800	0.808	0.800
	Bottom	0.281	0.087	0.400*	0.001	0.368	0.681	0.282
	Right	0.878	0.148	0.003	0.334	1.026	0.881	1.212
	Left	0.400*	0.003	0.787	0.000	0.403	1.187	0.400

Table 11-127
LTE Band 25 (PCS) Ant 2A Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	LTE Band 25 (PCS) Ant 2A SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	Bluetooth Ant 5 at 17.0 dBm SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	0.997	0.234	1.028	0.011	1.231	1.028**	1.008
	Top	0.400*	0.400*	0.408	0.400*	0.800	0.808	0.800
	Bottom	0.314	0.087	0.400*	0.001	0.401	0.714	0.315
	Right	0.900	0.148	0.003	0.334	1.048	0.903	1.234
	Left	0.400*	0.003	0.787	0.000	0.403	1.187	0.400

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 185 of 234

Table 11-128
LTE Band 30 Ant 2A Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	LTE Band 30 Ant 2A SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	Bluetooth Ant 5 at 17.0 dBm SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	0.727	0.234	1.028	0.011	0.961	1.028**	0.738
	Top	0.400*	0.400*	0.408	0.400*	0.800	0.808	0.800
	Bottom	0.333	0.087	0.400*	0.001	0.420	0.733	0.334
	Right	0.716	0.148	0.003	0.334	0.864	0.719	1.050
	Left	0.400*	0.003	0.787	0.000	0.403	1.187	0.400

Table 11-129
LTE Band 7 Ant 2A Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	LTE Band 7 Ant 2A SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	Bluetooth Ant 5 at 17.0 dBm SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	0.834	0.234	1.028	0.011	1.068	1.028**	0.845
	Top	0.400*	0.400*	0.408	0.400*	0.800	0.808	0.800
	Bottom	0.430	0.087	0.400*	0.001	0.517	0.830	0.431
	Right	0.651	0.148	0.003	0.334	0.799	0.654	0.985
	Left	0.400*	0.003	0.787	0.000	0.403	1.187	0.400

Table 11-130
LTE Band 41 Ant 2A Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	LTE Band 41 Ant 2A SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	Bluetooth Ant 5 at 17.0 dBm SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	1.130	0.234	1.028	0.011	1.364	1.130**	1.141
	Top	0.400*	0.400*	0.408	0.400*	0.800	0.808	0.800
	Bottom	0.556	0.087	0.400*	0.001	0.643	0.956	0.557
	Right	0.654	0.148	0.003	0.334	0.802	0.657	0.988
	Left	0.400*	0.003	0.787	0.000	0.403	1.187	0.400

Table 11-131
GSM 1900 Ant 2B Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	GPRS 1900 Ant 2B SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	Bluetooth Ant 5 at 17.0 dBm SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	0.807	0.234	1.028	0.011	1.041	1.028**	0.818
	Top	0.400*	0.400*	0.408	0.400*	0.800	0.808	0.800
	Bottom	0.538	0.087	0.400*	0.001	0.625	0.938	0.539
	Right	0.050	0.148	0.003	0.334	0.198	0.053	0.384
	Left	0.400*	0.003	0.787	0.000	0.403	1.187	0.400

Table 11-132
UMTS 1750 Ant 2B Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	UMTS 1750 Ant 2B SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	Bluetooth Ant 5 at 17.0 dBm SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	0.995	0.234	1.028	0.011	1.229	1.028**	1.006
	Top	0.400*	0.400*	0.408	0.400*	0.800	0.808	0.800
	Bottom	0.608	0.087	0.400*	0.001	0.695	1.008	0.609
	Right	0.044	0.148	0.003	0.334	0.192	0.047	0.378
	Left	0.400*	0.003	0.787	0.000	0.403	1.187	0.400

FCC ID: BCGA1934		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 186 of 234

Table 11-133
UMTS 1900 Ant 2B Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	UMTS 1900 Ant 2B SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	Bluetooth Ant 5 at 17.0 dBm SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	0.864	0.234	1.028	0.011	1.098	1.028**	0.875
	Top	0.400*	0.400*	0.408	0.400*	0.800	0.808	0.800
	Bottom	0.657	0.087	0.400*	0.001	0.744	1.057	0.658
	Right	0.044	0.148	0.003	0.334	0.192	0.047	0.378
	Left	0.400*	0.003	0.787	0.000	0.403	1.187	0.400

Table 11-134
LTE Band 66 (AWS) Ant 2B Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	LTE Band 66 (AWS) Ant 2B SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	Bluetooth Ant 5 at 17.0 dBm SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	0.934	0.234	1.028	0.011	1.168	1.028**	0.945
	Top	0.400*	0.400*	0.408	0.400*	0.800	0.808	0.800
	Bottom	0.531	0.087	0.400*	0.001	0.618	0.931	0.532
	Right	0.037	0.148	0.003	0.334	0.185	0.040	0.371
	Left	0.400*	0.003	0.787	0.000	0.403	1.187	0.400

Table 11-135
LTE Band 25 (PCS) Ant 2B Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	LTE Band 25 (PCS) Ant 2B SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	Bluetooth Ant 5 at 17.0 dBm SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	0.955	0.234	1.028	0.011	1.189	1.028**	0.966
	Top	0.400*	0.400*	0.408	0.400*	0.800	0.808	0.800
	Bottom	0.636	0.087	0.400*	0.001	0.723	1.036	0.637
	Right	0.050	0.148	0.003	0.334	0.198	0.053	0.384
	Left	0.400*	0.003	0.787	0.000	0.403	1.187	0.400

Table 11-136
LTE Band 30 Ant 2B Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	LTE Band 30 Ant 2B SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	Bluetooth Ant 5 at 17.0 dBm SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	1.101	0.234	1.028	0.011	1.335	1.101**	1.112
	Top	0.400*	0.400*	0.408	0.400*	0.800	0.808	0.800
	Bottom	0.614	0.087	0.400*	0.001	0.701	1.014	0.615
	Right	0.063	0.148	0.003	0.334	0.211	0.066	0.397
	Left	0.400*	0.003	0.787	0.000	0.403	1.187	0.400

Table 11-137
LTE Band 7 Ant 2B Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	LTE Band 7 Ant 2B SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	Bluetooth Ant 5 at 17.0 dBm SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	1.138	0.234	1.028	0.011	1.372	1.138**	1.149
	Top	0.400*	0.400*	0.408	0.400*	0.800	0.808	0.800
	Bottom	0.613	0.087	0.400*	0.001	0.700	1.013	0.614
	Right	0.043	0.148	0.003	0.334	0.191	0.046	0.377
	Left	0.400*	0.003	0.787	0.000	0.403	1.187	0.400

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 187 of 234

Table 11-138
LTE Band 41 Ant 2B Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	LTE Band 41 Ant 2B SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	Bluetooth Ant 5 at 17.0 dBm SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	1.103	0.234	1.028	0.011	1.337	1.103**	1.114
	Top	0.400*	0.400*	0.408	0.400*	0.800	0.808	0.800
	Bottom	0.450	0.087	0.400*	0.001	0.537	0.850	0.451
	Right	0.033	0.148	0.003	0.334	0.181	0.036	0.367
	Left	0.400*	0.003	0.787	0.000	0.403	1.187	0.400

Table 11-139
GSM 850 Ant 1 Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	GPRS 850 Ant 1 SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.524	0.234	0.091	0.111	0.849	0.869	0.960
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.320	0.087	0.013	0.400*	0.420	0.807	0.820
	Right	0.007	0.148	1.128	1.029	1.283	1.184	1.283**
	Left	1.024	0.003	0.001	0.020	1.028	1.047	1.048
Simult Tx	Configuration	GPRS 850 Ant 1 SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.524	1.028	0.091	0.111	1.028**	1.028**	1.028**
	Top	0.400*	0.408	0.000	0.037	0.808	0.845	0.845
	Bottom	0.320	0.400*	0.013	0.400*	0.733	1.120	1.133
	Right	0.007	0.003	1.128	1.029	1.138	1.039	1.135**
	Left	1.024	0.787	0.001	0.020	1.025**	1.024**	1.025**
Simult Tx	Configuration	GPRS 850 Ant 1 SAR (W/kg)	Bluetooth Ant 5 at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.524	0.005	0.091	0.111	0.620	0.640	0.731
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.320	0.001	0.013	0.400*	0.334	0.721	0.734
	Right	0.007	0.140	1.128	1.029	1.275	1.176	1.275**
	Left	1.024	0.000	0.001	0.020	1.025	1.044	1.045

FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device		Page 188 of 234

Table 11-140

UMTS 850 Ant 1 Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	UMTS 850 Ant 1 SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.682	0.234	0.091	0.111	1.007	1.027	1.118
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.375	0.087	0.013	0.400*	0.475	0.862	0.875
	Right	0.016	0.148	1.128	1.029	1.292	1.193	1.292**
	Left	1.184	0.003	0.001	0.020	1.188	1.207	1.208
Simult Tx	Configuration	UMTS 850 Ant 1 SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.682	1.028	0.091	0.111	1.028**	1.028**	1.028**
	Top	0.400*	0.408	0.000	0.037	0.808	0.845	0.845
	Bottom	0.375	0.400*	0.013	0.400*	0.788	1.175	1.188
	Right	0.016	0.003	1.128	1.029	1.147	1.048	1.144**
	Left	1.184	0.787	0.001	0.020	1.185**	1.184**	1.185**
Simult Tx	Configuration	UMTS 850 Ant 1 SAR (W/kg)	Bluetooth Ant 5 at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.682	0.005	0.091	0.111	0.778	0.798	0.889
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.375	0.001	0.013	0.400*	0.389	0.776	0.789
	Right	0.016	0.140	1.128	1.029	1.284	1.185	1.284**
	Left	1.184	0.000	0.001	0.020	1.185	1.204	1.205

Table 11-141

LTE Band 12 Ant 1 Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	LTE Band 12 Ant 1 SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.576	0.234	0.091	0.111	0.901	0.921	1.012
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.432	0.087	0.013	0.400*	0.532	0.919	0.932
	Right	0.006	0.148	1.128	1.029	1.282	1.183	1.282**
	Left	1.180	0.003	0.001	0.020	1.184	1.203	1.204
Simult Tx	Configuration	LTE Band 12 Ant 1 SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.576	1.028	0.091	0.111	1.028**	1.028**	1.028**
	Top	0.400*	0.408	0.000	0.037	0.808	0.845	0.845
	Bottom	0.432	0.400*	0.013	0.400*	0.845	1.232	1.245
	Right	0.006	0.003	1.128	1.029	1.137	1.038	1.134**
	Left	1.180	0.787	0.001	0.020	1.181**	1.180**	1.181**
Simult Tx	Configuration	LTE Band 12 Ant 1 SAR (W/kg)	Bluetooth Ant 5 at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.576	0.005	0.091	0.111	0.672	0.692	0.783
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.432	0.001	0.013	0.400*	0.446	0.833	0.846
	Right	0.006	0.140	1.128	1.029	1.274	1.175	1.274**
	Left	1.180	0.000	0.001	0.020	1.181	1.200	1.201

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 189 of 234

Table 11-142

LTE Band 13 Ant 1 Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	LTE Band 13 Ant 1 SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.843	0.234	0.091	0.111	1.168	1.188	1.279
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.530	0.087	0.013	0.400*	0.630	1.017	1.030
	Right	0.010	0.148	1.128	1.029	1.286	1.187	1.286**
	Left	0.974	0.003	0.001	0.020	0.978	0.997	0.998
Simult Tx	Configuration	LTE Band 13 Ant 1 SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.843	1.028	0.091	0.111	1.028**	1.028**	1.028**
	Top	0.400*	0.408	0.000	0.037	0.808	0.845	0.845
	Bottom	0.530	0.400*	0.013	0.400*	0.943	1.330	1.343
	Right	0.010	0.003	1.128	1.029	1.141	1.042	1.138**
	Left	0.974	0.787	0.001	0.020	0.975**	0.974**	0.975**
Simult Tx	Configuration	LTE Band 13 Ant 1 SAR (W/kg)	Bluetooth Ant 5 at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.843	0.005	0.091	0.111	0.939	0.959	1.050
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.530	0.001	0.013	0.400*	0.544	0.931	0.944
	Right	0.010	0.140	1.128	1.029	1.278	1.179	1.278**
	Left	0.974	0.000	0.001	0.020	0.975	0.994	0.995

Table 11-143

LTE Band 14 Ant 1 Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	LTE Band 14 Ant 1 SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.869	0.234	0.091	0.111	1.194	1.214	1.305
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.615	0.087	0.013	0.400*	0.715	1.102	1.115
	Right	0.013	0.148	1.128	1.029	1.289	1.190	1.289**
	Left	0.995	0.003	0.001	0.020	0.999	1.018	1.019
Simult Tx	Configuration	LTE Band 14 Ant 1 SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.869	1.028	0.091	0.111	1.028**	1.028**	1.028**
	Top	0.400*	0.408	0.000	0.037	0.808	0.845	0.845
	Bottom	0.615	0.400*	0.013	0.400*	1.028	1.415	1.428
	Right	0.013	0.003	1.128	1.029	1.144	1.045	1.141**
	Left	0.995	0.787	0.001	0.020	0.996**	0.995**	0.996**
Simult Tx	Configuration	LTE Band 14 Ant 1 SAR (W/kg)	Bluetooth Ant 5 at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.869	0.005	0.091	0.111	0.965	0.985	1.076
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.615	0.001	0.013	0.400*	0.629	1.016	1.029
	Right	0.013	0.140	1.128	1.029	1.281	1.182	1.281**
	Left	0.995	0.000	0.001	0.020	0.996	1.015	1.016

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 190 of 234

Table 11-144

LTE Band 5 (Cell) Ant 1 Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	LTE Band 5 (Cell) Ant 1 SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.905	0.234	0.091	0.111	1.230	1.250	1.341
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.419	0.087	0.013	0.400*	0.519	0.906	0.919
	Right	0.013	0.148	1.128	1.029	1.289	1.190	1.289**
	Left	1.172	0.003	0.001	0.020	1.176	1.195	1.196
Simult Tx	Configuration	LTE Band 5 (Cell) Ant 1 SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.905	1.028	0.091	0.111	1.028**	1.028**	1.028**
	Top	0.400*	0.408	0.000	0.037	0.808	0.845	0.845
	Bottom	0.419	0.400*	0.013	0.400*	0.832	1.219	1.232
	Right	0.013	0.003	1.128	1.029	1.144	1.045	1.141**
	Left	1.172	0.787	0.001	0.020	1.173**	1.172**	1.173**
Simult Tx	Configuration	LTE Band 5 (Cell) Ant 1 SAR (W/kg)	Bluetooth Ant 5 at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.905	0.005	0.091	0.111	1.001	1.021	1.112
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.419	0.001	0.013	0.400*	0.433	0.820	0.833
	Right	0.013	0.140	1.128	1.029	1.281	1.182	1.281**
	Left	1.172	0.000	0.001	0.020	1.173	1.192	1.193

Table 11-145

LTE Band 26 (Cell) Ant 1 Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	LTE Band 26 (Cell) Ant 1 SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.901	0.234	0.091	0.111	1.226	1.246	1.337
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.365	0.087	0.013	0.400*	0.465	0.852	0.865
	Right	0.006	0.148	1.128	1.029	1.282	1.183	1.282**
	Left	1.163	0.003	0.001	0.020	1.167	1.186	1.187
Simult Tx	Configuration	LTE Band 26 (Cell) Ant 1 SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.901	1.028	0.091	0.111	1.028**	1.028**	1.028**
	Top	0.400*	0.408	0.000	0.037	0.808	0.845	0.845
	Bottom	0.365	0.400*	0.013	0.400*	0.778	1.165	1.178
	Right	0.006	0.003	1.128	1.029	1.137	1.038	1.134**
	Left	1.163	0.787	0.001	0.020	1.164**	1.163**	1.164**
Simult Tx	Configuration	LTE Band 26 (Cell) Ant 1 SAR (W/kg)	Bluetooth Ant 5 at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.901	0.005	0.091	0.111	0.997	1.017	1.108
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.365	0.001	0.013	0.400*	0.379	0.766	0.779
	Right	0.006	0.140	1.128	1.029	1.274	1.175	1.274**
	Left	1.163	0.000	0.001	0.020	1.164	1.183	1.184

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 191 of 234

Table 11-146

GSM 850 Ant 3 Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	GPRS 850 Ant 3 SAR (W/kg)	Bluetooth Ant 2a at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 Reduced SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.044	0.619	0.091	0.022	1.044**	1.066**	1.066**
	Top	0.500	0.400*	0.000	0.000	0.900	0.900	0.900
	Bottom	0.400*	0.284	0.013	0.400*	0.697	1.084	1.097
	Right	0.830	0.319	1.128	0.274	1.447**	1.423	1.447**
	Left	0.400*	0.003	0.001	0.020	0.404	0.423	0.424
Simult Tx	Configuration	GPRS 850 Ant 3 SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 Reduced SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.044	0.168	0.091	0.022	1.303	1.234	1.325
	Top	0.500	0.065	0.000	0.000	0.565	0.565	0.565
	Bottom	0.400*	0.400*	0.013	0.400*	0.813	1.200	1.213
	Right	0.830	0.003	1.128	0.274	1.128**	1.107	1.128**
	Left	0.400*	0.102	0.001	0.020	0.503	0.522	0.523
Simult Tx	Configuration	GPRS 850 Ant 3 SAR (W/kg)	Bluetooth Ant 5 at 14.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 Reduced SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.044	0.008	0.091	0.022	1.143	1.074	1.165
	Top	0.500	0.400*	0.000	0.000	0.900	0.900	0.900
	Bottom	0.400*	0.001	0.013	0.400*	0.414	0.801	0.814
	Right	0.830	0.246	1.128	0.274	1.374**	1.350	1.374**
	Left	0.400*	0.000	0.001	0.020	0.401	0.420	0.421

Table 11-147

UMTS 850 Ant 3 Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	UMTS 850 Ant 3 SAR (W/kg)	Bluetooth Ant 2a at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 Reduced SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.165	0.619	0.091	0.022	1.165**	1.187**	1.187**
	Top	0.560	0.400*	0.000	0.000	0.960	0.960	0.960
	Bottom	0.400*	0.284	0.013	0.400*	0.697	1.084	1.097
	Right	1.122	0.319	1.128	0.274	1.447**	1.396**	1.447**
	Left	0.400*	0.003	0.001	0.020	0.404	0.423	0.424
Simult Tx	Configuration	UMTS 850 Ant 3 SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 Reduced SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.165	0.168	0.091	0.022	1.424	1.355	1.446
	Top	0.560	0.065	0.000	0.000	0.625	0.625	0.625
	Bottom	0.400*	0.400*	0.013	0.400*	0.813	1.200	1.213
	Right	1.122	0.003	1.128	0.274	1.128**	1.399	1.399**
	Left	0.400*	0.102	0.001	0.020	0.503	0.522	0.523
Simult Tx	Configuration	UMTS 850 Ant 3 SAR (W/kg)	Bluetooth Ant 5 at 14.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 Reduced SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.165	0.008	0.091	0.022	1.264	1.195	1.286
	Top	0.560	0.400*	0.000	0.000	0.960	0.960	0.960
	Bottom	0.400*	0.001	0.013	0.400*	0.414	0.801	0.814
	Right	1.122	0.246	1.128	0.274	1.374**	1.396**	1.396**
	Left	0.400*	0.000	0.001	0.020	0.401	0.420	0.421

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 192 of 234

Table 11-148

LTE Band 12 Ant 3 Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	LTE Band 12 Ant 3 SAR (W/kg)	Bluetooth Ant 2a at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 Reduced SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.090	0.619	0.091	0.022	1.09**	1.112**	1.112**
	Top	0.507	0.400*	0.000	0.000	0.907	0.907	0.907
	Bottom	0.400*	0.284	0.013	0.400*	0.697	1.084	1.097
	Right	0.931	0.319	1.128	0.274	1.447**	1.524	1.447**
	Left	0.400*	0.003	0.001	0.020	0.404	0.423	0.424
Simult Tx	Configuration	LTE Band 12 Ant 3 SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 Reduced SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.090	0.168	0.091	0.022	1.349	1.280	1.371
	Top	0.507	0.065	0.000	0.000	0.572	0.572	0.572
	Bottom	0.400*	0.400*	0.013	0.400*	0.813	1.200	1.213
	Right	0.931	0.003	1.128	0.274	1.128**	1.208	1.208**
	Left	0.400*	0.102	0.001	0.020	0.503	0.522	0.523
Simult Tx	Configuration	LTE Band 12 Ant 3 SAR (W/kg)	Bluetooth Ant 5 at 14.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 Reduced SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.090	0.008	0.091	0.022	1.189	1.120	1.211
	Top	0.507	0.400*	0.000	0.000	0.907	0.907	0.907
	Bottom	0.400*	0.001	0.013	0.400*	0.414	0.801	0.814
	Right	0.931	0.246	1.128	0.274	1.374**	1.451	1.374**
	Left	0.400*	0.000	0.001	0.020	0.401	0.420	0.421

Table 11-149

LTE Band 13 Ant 3 Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	LTE Band 13 Ant 3 SAR (W/kg)	Bluetooth Ant 2a at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 Reduced SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.983	0.619	0.091	0.022	0.983**	1.005**	1.005**
	Top	0.551	0.400*	0.000	0.000	0.951	0.951	0.951
	Bottom	0.400*	0.284	0.013	0.400*	0.697	1.084	1.097
	Right	0.586	0.319	1.128	0.274	1.447**	1.179	1.447**
	Left	0.400*	0.003	0.001	0.020	0.404	0.423	0.424
Simult Tx	Configuration	LTE Band 13 Ant 3 SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 Reduced SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.983	0.168	0.091	0.022	1.242	1.173	1.264
	Top	0.551	0.065	0.000	0.000	0.616	0.616	0.616
	Bottom	0.400*	0.400*	0.013	0.400*	0.813	1.200	1.213
	Right	0.586	0.003	1.128	0.274	1.128**	0.863	1.128**
	Left	0.400*	0.102	0.001	0.020	0.503	0.522	0.523
Simult Tx	Configuration	LTE Band 13 Ant 3 SAR (W/kg)	Bluetooth Ant 5 at 14.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 Reduced SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.983	0.008	0.091	0.022	1.082	1.013	1.104
	Top	0.551	0.400*	0.000	0.000	0.951	0.951	0.951
	Bottom	0.400*	0.001	0.013	0.400*	0.414	0.801	0.814
	Right	0.586	0.246	1.128	0.274	1.374**	1.106	1.374**
	Left	0.400*	0.000	0.001	0.020	0.401	0.420	0.421

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 193 of 234

Table 11-150

LTE Band 14 Ant 3 Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	LTE Band 14 Ant 3 SAR (W/kg)	Bluetooth Ant 2a at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 Reduced SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.894	0.619	0.091	0.022	0.894**	1.535	0.916**
	Top	0.519	0.400*	0.000	0.000	0.919	0.919	0.919
	Bottom	0.400*	0.284	0.013	0.400*	0.697	1.084	1.097
	Right	0.587	0.319	1.128	0.274	1.447**	1.180	1.447**
	Left	0.400*	0.003	0.001	0.020	0.404	0.423	0.424
Simult Tx	Configuration	LTE Band 14 Ant 3 SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 Reduced SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.894	0.168	0.091	0.022	1.153	1.084	1.175
	Top	0.519	0.065	0.000	0.000	0.584	0.584	0.584
	Bottom	0.400*	0.400*	0.013	0.400*	0.813	1.200	1.213
	Right	0.587	0.003	1.128	0.274	1.128**	0.864	1.128**
	Left	0.400*	0.102	0.001	0.020	0.503	0.522	0.523
Simult Tx	Configuration	LTE Band 14 Ant 3 SAR (W/kg)	Bluetooth Ant 5 at 14.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 Reduced SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.894	0.008	0.091	0.022	0.993	0.924	1.015
	Top	0.519	0.400*	0.000	0.000	0.919	0.919	0.919
	Bottom	0.400*	0.001	0.013	0.400*	0.414	0.801	0.814
	Right	0.587	0.246	1.128	0.274	1.374**	1.107	1.374**
	Left	0.400*	0.000	0.001	0.020	0.401	0.420	0.421

Table 11-151

LTE Band 5 (Cell) Ant 3 Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	LTE Band 5 (Cell) Ant 3 SAR (W/kg)	Bluetooth Ant 2a at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 Reduced SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.050	0.619	0.091	0.022	1.05**	1.072**	1.072**
	Top	0.626	0.400*	0.000	0.000	1.026	1.026	1.026
	Bottom	0.400*	0.284	0.013	0.400*	0.697	1.084	1.097
	Right	0.722	0.319	1.128	0.274	1.447**	1.315	1.447**
	Left	0.400*	0.003	0.001	0.020	0.404	0.423	0.424
Simult Tx	Configuration	LTE Band 5 (Cell) Ant 3 SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 Reduced SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.050	0.168	0.091	0.022	1.309	1.240	1.331
	Top	0.626	0.065	0.000	0.000	0.691	0.691	0.691
	Bottom	0.400*	0.400*	0.013	0.400*	0.813	1.200	1.213
	Right	0.722	0.003	1.128	0.274	1.128**	0.999	1.128**
	Left	0.400*	0.102	0.001	0.020	0.503	0.522	0.523
Simult Tx	Configuration	LTE Band 5 (Cell) Ant 3 SAR (W/kg)	Bluetooth Ant 5 at 14.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 Reduced SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.050	0.008	0.091	0.022	1.149	1.080	1.171
	Top	0.626	0.400*	0.000	0.000	1.026	1.026	1.026
	Bottom	0.400*	0.001	0.013	0.400*	0.414	0.801	0.814
	Right	0.722	0.246	1.128	0.274	1.374**	1.242	1.374**
	Left	0.400*	0.000	0.001	0.020	0.401	0.420	0.421

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 194 of 234

Table 11-152

LTE Band 26 (Cell) Ant 3 Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	LTE Band 26 (Cell) Ant 3 SAR (W/kg)	Bluetooth Ant 2a at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 Reduced SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.159	0.619	0.091	0.022	1.159**	1.181**	1.181**
	Top	0.484	0.400*	0.000	0.000	0.884	0.884	0.884
	Bottom	0.400*	0.284	0.013	0.400*	0.697	1.084	1.097
	Right	1.160	0.319	1.128	0.274	1.447**	1.434**	1.447**
	Left	0.400*	0.003	0.001	0.020	0.404	0.423	0.424
Simult Tx	Configuration	LTE Band 26 (Cell) Ant 3 SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 Reduced SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.159	0.168	0.091	0.022	1.418	1.349	1.440
	Top	0.484	0.065	0.000	0.000	0.549	0.549	0.549
	Bottom	0.400*	0.400*	0.013	0.400*	0.813	1.200	1.213
	Right	1.160	0.003	1.128	0.274	1.163**	1.437	1.437**
	Left	0.400*	0.102	0.001	0.020	0.503	0.522	0.523
Simult Tx	Configuration	LTE Band 26 (Cell) Ant 3 SAR (W/kg)	Bluetooth Ant 5 at 14.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 Reduced SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.159	0.008	0.091	0.022	1.258	1.189	1.280
	Top	0.484	0.400*	0.000	0.000	0.884	0.884	0.884
	Bottom	0.400*	0.001	0.013	0.400*	0.414	0.801	0.814
	Right	1.160	0.246	1.128	0.274	1.374**	1.434**	1.434**
	Left	0.400*	0.000	0.001	0.020	0.401	0.420	0.421

Table 11-153

GSM 1900 Ant 4A Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	GPRS 1900 Ant 4A SAR (W/kg)	Bluetooth Ant 2a at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.068	0.619	0.091	0.111	1.068**	1.068**	1.068**
	Top	0.359	0.400*	0.000	0.037	0.759	0.796	0.796
	Bottom	0.400*	0.284	0.013	0.400*	0.697	1.084	1.097
	Right	0.001	0.319	1.128	1.029	1.448	1.349	1.447**
	Left	0.881	0.003	0.001	0.020	0.885	0.904	0.905
Simult Tx	Configuration	GPRS 1900 Ant 4A SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.068	0.168	0.091	0.111	1.327	1.347	1.438
	Top	0.359	0.065	0.000	0.037	0.424	0.461	0.461
	Bottom	0.400*	0.400*	0.013	0.400*	0.813	1.200	1.213
	Right	0.001	0.003	1.128	1.029	1.132	1.033	1.128**
	Left	0.881	0.102	0.001	0.020	0.984	1.003	1.004
Simult Tx	Configuration	GPRS 1900 Ant 4A SAR (W/kg)	Bluetooth Ant 5 at 14.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.068	0.008	0.091	0.111	1.167	1.187	1.278
	Top	0.359	0.400*	0.000	0.037	0.759	0.796	0.796
	Bottom	0.400*	0.001	0.013	0.400*	0.414	0.801	0.814
	Right	0.001	0.246	1.128	1.029	1.375	1.276	1.374**
	Left	0.881	0.000	0.001	0.020	0.882	0.901	0.902

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 195 of 234

Table 11-154

UMTS 1750 Ant 4A Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	UMTS 1750 Ant 4A SAR (W/kg)	Bluetooth Ant 2a at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.019	0.619	0.091	0.111	1.019**	1.019**	1.019**
	Top	0.321	0.400*	0.000	0.037	0.721	0.758	0.758
	Bottom	0.400*	0.284	0.013	0.400*	0.697	1.084	1.097
	Right	0.001	0.319	1.128	1.029	1.448	1.349	1.447**
	Left	0.931	0.003	0.001	0.020	0.935	0.954	0.955
Simult Tx	Configuration	UMTS 1750 Ant 4A SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.019	0.168	0.091	0.111	1.278	1.298	1.389
	Top	0.321	0.065	0.000	0.037	0.386	0.423	0.423
	Bottom	0.400*	0.400*	0.013	0.400*	0.813	1.200	1.213
	Right	0.001	0.003	1.128	1.029	1.132	1.033	1.128**
	Left	0.931	0.102	0.001	0.020	1.034	1.053	1.054
Simult Tx	Configuration	UMTS 1750 Ant 4A SAR (W/kg)	Bluetooth Ant 5 at 14.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.019	0.008	0.091	0.111	1.118	1.138	1.229
	Top	0.321	0.400*	0.000	0.037	0.721	0.758	0.758
	Bottom	0.400*	0.001	0.013	0.400*	0.414	0.801	0.814
	Right	0.001	0.246	1.128	1.029	1.375	1.276	1.374**
	Left	0.931	0.000	0.001	0.020	0.932	0.951	0.952

Table 11-155

UMTS 1900 Ant 4A Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	UMTS 1900 Ant 4A SAR (W/kg)	Bluetooth Ant 2a at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.003	0.619	0.091	0.111	1.003**	1.003**	1.003**
	Top	0.455	0.400*	0.000	0.037	0.855	0.892	0.892
	Bottom	0.400*	0.284	0.013	0.400*	0.697	1.084	1.097
	Right	0.001	0.319	1.128	1.029	1.448	1.349	1.447**
	Left	1.075	0.003	0.001	0.020	1.079	1.098	1.099
Simult Tx	Configuration	UMTS 1900 Ant 4A SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.003	0.168	0.091	0.111	1.262	1.282	1.373
	Top	0.455	0.065	0.000	0.037	0.520	0.557	0.557
	Bottom	0.400*	0.400*	0.013	0.400*	0.813	1.200	1.213
	Right	0.001	0.003	1.128	1.029	1.132	1.033	1.128**
	Left	1.075	0.102	0.001	0.020	1.178	1.197	1.198
Simult Tx	Configuration	UMTS 1900 Ant 4A SAR (W/kg)	Bluetooth Ant 5 at 14.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.003	0.008	0.091	0.111	1.102	1.122	1.213
	Top	0.455	0.400*	0.000	0.037	0.855	0.892	0.892
	Bottom	0.400*	0.001	0.013	0.400*	0.414	0.801	0.814
	Right	0.001	0.246	1.128	1.029	1.375	1.276	1.374**
	Left	1.075	0.000	0.001	0.020	1.076	1.095	1.096

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 196 of 234

Table 11-156

LTE Band 66 (AWS) Ant 4A Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	LTE Band 66 (AWS) Ant 4A SAR (W/kg)	Bluetooth Ant 2a at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.953	0.619	0.091	0.111	0.953**	0.953**	0.953**
	Top	0.346	0.400*	0.000	0.037	0.746	0.783	0.783
	Bottom	0.400*	0.284	0.013	0.400*	0.697	1.084	1.097
	Right	0.001	0.319	1.128	1.029	1.448	1.349	1.447**
	Left	1.033	0.003	0.001	0.020	1.037	1.056	1.057
Simult Tx	Configuration	LTE Band 66 (AWS) Ant 4A SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.953	0.168	0.091	0.111	1.212	1.232	1.323
	Top	0.346	0.065	0.000	0.037	0.411	0.448	0.448
	Bottom	0.400*	0.400*	0.013	0.400*	0.813	1.200	1.213
	Right	0.001	0.003	1.128	1.029	1.132	1.033	1.128**
	Left	1.033	0.102	0.001	0.020	1.136	1.155	1.156
Simult Tx	Configuration	LTE Band 66 (AWS) Ant 4A SAR (W/kg)	Bluetooth Ant 5 at 14.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.953	0.008	0.091	0.111	1.052	1.072	1.163
	Top	0.346	0.400*	0.000	0.037	0.746	0.783	0.783
	Bottom	0.400*	0.001	0.013	0.400*	0.414	0.801	0.814
	Right	0.001	0.246	1.128	1.029	1.375	1.276	1.374**
	Left	1.033	0.000	0.001	0.020	1.034	1.053	1.054

Table 11-157

LTE Band 25 (PCS) Ant 4A Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	LTE Band 25 (PCS) Ant 4A SAR (W/kg)	Bluetooth Ant 2a at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.016	0.619	0.091	0.111	1.016**	1.016**	1.016**
	Top	0.474	0.400*	0.000	0.037	0.874	0.911	0.911
	Bottom	0.400*	0.284	0.013	0.400*	0.697	1.084	1.097
	Right	0.002	0.319	1.128	1.029	1.449	1.350	1.447**
	Left	0.984	0.003	0.001	0.020	0.988	1.007	1.008
Simult Tx	Configuration	LTE Band 25 (PCS) Ant 4A SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.016	0.168	0.091	0.111	1.275	1.295	1.386
	Top	0.474	0.065	0.000	0.037	0.539	0.576	0.576
	Bottom	0.400*	0.400*	0.013	0.400*	0.813	1.200	1.213
	Right	0.002	0.003	1.128	1.029	1.133	1.034	1.128**
	Left	0.984	0.102	0.001	0.020	1.087	1.106	1.107
Simult Tx	Configuration	LTE Band 25 (PCS) Ant 4A SAR (W/kg)	Bluetooth Ant 5 at 14.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.016	0.008	0.091	0.111	1.115	1.135	1.226
	Top	0.474	0.400*	0.000	0.037	0.874	0.911	0.911
	Bottom	0.400*	0.001	0.013	0.400*	0.414	0.801	0.814
	Right	0.002	0.246	1.128	1.029	1.376	1.277	1.374**
	Left	0.984	0.000	0.001	0.020	0.985	1.004	1.005

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 197 of 234

Table 11-158

LTE Band 30 Ant 4A Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	LTE Band 30 Ant 4A SAR (W/kg)	Bluetooth Ant 2a at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.908	0.619	0.091	0.111	0.908**	0.908**	0.908**
	Top	0.398	0.400*	0.000	0.037	0.798	0.835	0.835
	Bottom	0.400*	0.284	0.013	0.400*	0.697	1.084	1.097
	Right	0.002	0.319	1.128	1.029	1.449	1.350	1.447**
	Left	0.554	0.003	0.001	0.020	0.558	0.577	0.578
Simult Tx	Configuration	LTE Band 30 Ant 4A SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.908	0.168	0.091	0.111	1.167	1.187	1.278
	Top	0.398	0.065	0.000	0.037	0.463	0.500	0.500
	Bottom	0.400*	0.400*	0.013	0.400*	0.813	1.200	1.213
	Right	0.002	0.003	1.128	1.029	1.133	1.034	1.128**
	Left	0.554	0.102	0.001	0.020	0.657	0.676	0.677
Simult Tx	Configuration	LTE Band 30 Ant 4A SAR (W/kg)	Bluetooth Ant 5 at 14.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.908	0.008	0.091	0.111	1.007	1.027	1.118
	Top	0.398	0.400*	0.000	0.037	0.798	0.835	0.835
	Bottom	0.400*	0.001	0.013	0.400*	0.414	0.801	0.814
	Right	0.002	0.246	1.128	1.029	1.376	1.277	1.374**
	Left	0.554	0.000	0.001	0.020	0.555	0.574	0.575

Table 11-159

LTE Band 7 Ant 4A Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	LTE Band 7 Ant 4A SAR (W/kg)	Bluetooth Ant 2a at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.088	0.619	0.091	0.111	1.088**	1.088**	1.088**
	Top	0.301	0.400*	0.000	0.037	0.701	0.738	0.738
	Bottom	0.400*	0.284	0.013	0.400*	0.697	1.084	1.097
	Right	0.003	0.319	1.128	1.029	1.450	1.351	1.447**
	Left	0.830	0.003	0.001	0.020	0.834	0.853	0.854
Simult Tx	Configuration	LTE Band 7 Ant 4A SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.088	0.168	0.091	0.111	1.347	1.367	1.458
	Top	0.301	0.065	0.000	0.037	0.366	0.403	0.403
	Bottom	0.400*	0.400*	0.013	0.400*	0.813	1.200	1.213
	Right	0.003	0.003	1.128	1.029	1.134	1.035	1.128**
	Left	0.830	0.102	0.001	0.020	0.933	0.952	0.953
Simult Tx	Configuration	LTE Band 7 Ant 4A SAR (W/kg)	Bluetooth Ant 5 at 14.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.088	0.008	0.091	0.111	1.187	1.207	1.298
	Top	0.301	0.400*	0.000	0.037	0.701	0.738	0.738
	Bottom	0.400*	0.001	0.013	0.400*	0.414	0.801	0.814
	Right	0.003	0.246	1.128	1.029	1.377	1.278	1.374**
	Left	0.830	0.000	0.001	0.020	0.831	0.850	0.851

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 198 of 234

Table 11-160

LTE Band 41 Ant 4A Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	LTE Band 41 Ant 4A SAR (W/kg)	Bluetooth Ant 2a at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.179	0.619	0.091	0.111	1.179**	1.179**	1.179**
	Top	0.257	0.400*	0.000	0.037	0.657	0.694	0.694
	Bottom	0.400*	0.284	0.013	0.400*	0.697	1.084	1.097
	Right	0.002	0.319	1.128	1.029	1.449	1.350	1.447**
	Left	0.938	0.003	0.001	0.020	0.942	0.961	0.962
Simult Tx	Configuration	LTE Band 41 Ant 4A SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.179	0.168	0.091	0.111	1.438	1.458	1.549
	Top	0.257	0.065	0.000	0.037	0.322	0.359	0.359
	Bottom	0.400*	0.400*	0.013	0.400*	0.813	1.200	1.213
	Right	0.002	0.003	1.128	1.029	1.133	1.034	1.128**
	Left	0.938	0.102	0.001	0.020	1.041	1.060	1.061
Simult Tx	Configuration	LTE Band 41 Ant 4A SAR (W/kg)	Bluetooth Ant 5 at 14.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.179	0.008	0.091	0.111	1.278	1.298	1.389
	Top	0.257	0.400*	0.000	0.037	0.657	0.694	0.694
	Bottom	0.400*	0.001	0.013	0.400*	0.414	0.801	0.814
	Right	0.002	0.246	1.128	1.029	1.376	1.277	1.374**
	Left	0.938	0.000	0.001	0.020	0.939	0.958	0.959

Table 11-161

GSM 1900 Ant 4B Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	GPRS 1900 Ant 4B SAR (W/kg)	Bluetooth Ant 2a at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.980	0.619	0.091	0.111	0.980**	0.980**	0.980**
	Top	0.780	0.400*	0.000	0.037	1.180	1.217	1.217
	Bottom	0.400*	0.284	0.013	0.400*	0.697	1.084	1.097
	Right	0.014	0.319	1.128	1.029	1.461	1.362	1.447**
	Left	0.066	0.003	0.001	0.020	0.070	0.089	0.090
Simult Tx	Configuration	GPRS 1900 Ant 4B SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.980	0.168	0.091	0.111	1.239	1.259	1.350
	Top	0.780	0.065	0.000	0.037	0.845	0.882	0.882
	Bottom	0.400*	0.400*	0.013	0.400*	0.813	1.200	1.213
	Right	0.014	0.003	1.128	1.029	1.145	1.046	1.128**
	Left	0.066	0.102	0.001	0.020	0.169	0.188	0.189
Simult Tx	Configuration	GPRS 1900 Ant 4B SAR (W/kg)	Bluetooth Ant 5 at 14.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.980	0.008	0.091	0.111	1.079	1.099	1.190
	Top	0.780	0.400*	0.000	0.037	1.180	1.217	1.217
	Bottom	0.400*	0.001	0.013	0.400*	0.414	0.801	0.814
	Right	0.014	0.246	1.128	1.029	1.388	1.289	1.374**
	Left	0.066	0.000	0.001	0.020	0.067	0.086	0.087

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 199 of 234

Table 11-162

UMTS 1750 Ant 4B Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	UMTS 1750 Ant 4B SAR (W/kg)	Bluetooth Ant 2a at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.046	0.619	0.091	0.111	1.046**	1.046**	1.046**
	Top	0.786	0.400*	0.000	0.037	1.186	1.223	1.223
	Bottom	0.400*	0.284	0.013	0.400*	0.697	1.084	1.097
	Right	0.011	0.319	1.128	1.029	1.458	1.359	1.447**
	Left	0.069	0.003	0.001	0.020	0.073	0.092	0.093
Simult Tx	Configuration	UMTS 1750 Ant 4B SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.046	0.168	0.091	0.111	1.305	1.325	1.416
	Top	0.786	0.065	0.000	0.037	0.851	0.888	0.888
	Bottom	0.400*	0.400*	0.013	0.400*	0.813	1.200	1.213
	Right	0.011	0.003	1.128	1.029	1.142	1.043	1.128**
	Left	0.069	0.102	0.001	0.020	0.172	0.191	0.192
Simult Tx	Configuration	UMTS 1750 Ant 4B SAR (W/kg)	Bluetooth Ant 5 at 14.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.046	0.008	0.091	0.111	1.145	1.165	1.256
	Top	0.786	0.400*	0.000	0.037	1.186	1.223	1.223
	Bottom	0.400*	0.001	0.013	0.400*	0.414	0.801	0.814
	Right	0.011	0.246	1.128	1.029	1.385	1.286	1.374**
	Left	0.069	0.000	0.001	0.020	0.070	0.089	0.090

Table 11-163

UMTS 1900 Ant 4B Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	UMTS 1900 Ant 4B SAR (W/kg)	Bluetooth Ant 2a at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.057	0.619	0.091	0.111	1.057**	1.057**	1.057**
	Top	0.696	0.400*	0.000	0.037	1.096	1.133	1.133
	Bottom	0.400*	0.284	0.013	0.400*	0.697	1.084	1.097
	Right	0.018	0.319	1.128	1.029	1.465	1.366	1.447**
	Left	0.061	0.003	0.001	0.020	0.065	0.084	0.085
Simult Tx	Configuration	UMTS 1900 Ant 4B SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.057	0.168	0.091	0.111	1.316	1.336	1.427
	Top	0.696	0.065	0.000	0.037	0.761	0.798	0.798
	Bottom	0.400*	0.400*	0.013	0.400*	0.813	1.200	1.213
	Right	0.018	0.003	1.128	1.029	1.149	1.050	1.128**
	Left	0.061	0.102	0.001	0.020	0.164	0.183	0.184
Simult Tx	Configuration	UMTS 1900 Ant 4B SAR (W/kg)	Bluetooth Ant 5 at 14.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.057	0.008	0.091	0.111	1.156	1.176	1.267
	Top	0.696	0.400*	0.000	0.037	1.096	1.133	1.133
	Bottom	0.400*	0.001	0.013	0.400*	0.414	0.801	0.814
	Right	0.018	0.246	1.128	1.029	1.392	1.293	1.374**
	Left	0.061	0.000	0.001	0.020	0.062	0.081	0.082

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 200 of 234

Table 11-164

LTE Band 66 (AWS) Ant 4B Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	LTE Band 66 (AWS) Ant 4B SAR (W/kg)	Bluetooth Ant 2a at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.009	0.619	0.091	0.111	1.009**	1.009**	1.009**
	Top	0.678	0.400*	0.000	0.037	1.078	1.115	1.115
	Bottom	0.400*	0.284	0.013	0.400*	0.697	1.084	1.097
	Right	0.010	0.319	1.128	1.029	1.457	1.358	1.447**
	Left	0.051	0.003	0.001	0.020	0.055	0.074	0.075
Simult Tx	Configuration	LTE Band 66 (AWS) Ant 4B SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.009	0.168	0.091	0.111	1.268	1.288	1.379
	Top	0.678	0.065	0.000	0.037	0.743	0.780	0.780
	Bottom	0.400*	0.400*	0.013	0.400*	0.813	1.200	1.213
	Right	0.010	0.003	1.128	1.029	1.141	1.042	1.128**
	Left	0.051	0.102	0.001	0.020	0.154	0.173	0.174
Simult Tx	Configuration	LTE Band 66 (AWS) Ant 4B SAR (W/kg)	Bluetooth Ant 5 at 14.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.009	0.008	0.091	0.111	1.108	1.128	1.219
	Top	0.678	0.400*	0.000	0.037	1.078	1.115	1.115
	Bottom	0.400*	0.001	0.013	0.400*	0.414	0.801	0.814
	Right	0.010	0.246	1.128	1.029	1.384	1.285	1.374**
	Left	0.051	0.000	0.001	0.020	0.052	0.071	0.072

Table 11-165

LTE Band 25 (PCS) Ant 4B Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	LTE Band 25 (PCS) Ant 4B SAR (W/kg)	Bluetooth Ant 2a at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.962	0.619	0.091	0.111	0.962**	0.962**	0.962**
	Top	0.671	0.400*	0.000	0.037	1.071	1.108	1.108
	Bottom	0.400*	0.284	0.013	0.400*	0.697	1.084	1.097
	Right	0.015	0.319	1.128	1.029	1.462	1.363	1.447**
	Left	0.065	0.003	0.001	0.020	0.069	0.088	0.089
Simult Tx	Configuration	LTE Band 25 (PCS) Ant 4B SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.962	0.168	0.091	0.111	1.221	1.241	1.332
	Top	0.671	0.065	0.000	0.037	0.736	0.773	0.773
	Bottom	0.400*	0.400*	0.013	0.400*	0.813	1.200	1.213
	Right	0.015	0.003	1.128	1.029	1.146	1.047	1.128**
	Left	0.065	0.102	0.001	0.020	0.168	0.187	0.188
Simult Tx	Configuration	LTE Band 25 (PCS) Ant 4B SAR (W/kg)	Bluetooth Ant 5 at 14.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.962	0.008	0.091	0.111	1.061	1.081	1.172
	Top	0.671	0.400*	0.000	0.037	1.071	1.108	1.108
	Bottom	0.400*	0.001	0.013	0.400*	0.414	0.801	0.814
	Right	0.015	0.246	1.128	1.029	1.389	1.290	1.374**
	Left	0.065	0.000	0.001	0.020	0.066	0.085	0.086

FCC ID: BCGA1934



SAR EVALUATION REPORT

Approved by:

Quality Manager

Document S/N:

1C1806220015-01-R2.BCG

Test Dates:

08/13/18-09/13/18

DUT Type:

Tablet Device

Page 201 of 234

Table 11-166

LTE Band 30 Ant 4B Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	LTE Band 30 Ant 4B SAR (W/kg)	Bluetooth Ant 2a at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.484	0.619	0.091	0.111	1.194	1.214	1.305
	Top	0.797	0.400*	0.000	0.037	1.197	1.234	1.234
	Bottom	0.400*	0.284	0.013	0.400*	0.697	1.084	1.097
	Right	0.018	0.319	1.128	1.029	1.465	1.366	1.447**
	Left	0.049	0.003	0.001	0.020	0.053	0.072	0.073
Simult Tx	Configuration	LTE Band 30 Ant 4B SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.484	0.168	0.091	0.111	0.743	0.763	0.854
	Top	0.797	0.065	0.000	0.037	0.862	0.899	0.899
	Bottom	0.400*	0.400*	0.013	0.400*	0.813	1.200	1.213
	Right	0.018	0.003	1.128	1.029	1.149	1.050	1.128**
	Left	0.049	0.102	0.001	0.020	0.152	0.171	0.172
Simult Tx	Configuration	LTE Band 30 Ant 4B SAR (W/kg)	Bluetooth Ant 5 at 14.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.484	0.008	0.091	0.111	0.583	0.603	0.694
	Top	0.797	0.400*	0.000	0.037	1.197	1.234	1.234
	Bottom	0.400*	0.001	0.013	0.400*	0.414	0.801	0.814
	Right	0.018	0.246	1.128	1.029	1.392	1.293	1.374**
	Left	0.049	0.000	0.001	0.020	0.050	0.069	0.070

Table 11-167

LTE Band 7 Ant 4B Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	LTE Band 7 Ant 4B SAR (W/kg)	Bluetooth Ant 2a at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.070	0.619	0.091	0.111	1.070**	1.070**	1.070**
	Top	0.632	0.400*	0.000	0.037	1.032	1.069	1.069
	Bottom	0.400*	0.284	0.013	0.400*	0.697	1.084	1.097
	Right	0.025	0.319	1.128	1.029	1.472	1.373	1.447**
	Left	0.039	0.003	0.001	0.020	0.043	0.062	0.063
Simult Tx	Configuration	LTE Band 7 Ant 4B SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.070	0.168	0.091	0.111	1.329	1.349	1.440
	Top	0.632	0.065	0.000	0.037	0.697	0.734	0.734
	Bottom	0.400*	0.400*	0.013	0.400*	0.813	1.200	1.213
	Right	0.025	0.003	1.128	1.029	1.156	1.057	1.128**
	Left	0.039	0.102	0.001	0.020	0.142	0.161	0.162
Simult Tx	Configuration	LTE Band 7 Ant 4B SAR (W/kg)	Bluetooth Ant 5 at 14.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.070	0.008	0.091	0.111	1.169	1.189	1.280
	Top	0.632	0.400*	0.000	0.037	1.032	1.069	1.069
	Bottom	0.400*	0.001	0.013	0.400*	0.414	0.801	0.814
	Right	0.025	0.246	1.128	1.029	1.399	1.300	1.374**
	Left	0.039	0.000	0.001	0.020	0.040	0.059	0.060

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 202 of 234

Table 11-168

LTE Band 41 Ant 4B Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	LTE Band 41 Ant 4B SAR (W/kg)	Bluetooth Ant 2a at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.179	0.619	0.091	0.111	1.179**	1.179**	1.179**
	Top	0.755	0.400*	0.000	0.037	1.155	1.192	1.192
	Bottom	0.400*	0.284	0.013	0.400*	0.697	1.084	1.097
	Right	0.031	0.319	1.128	1.029	1.478	1.379	1.447**
	Left	0.044	0.003	0.001	0.020	0.048	0.067	0.068
Simult Tx	Configuration	LTE Band 41 Ant 4B SAR (W/kg)	Bluetooth Ant 4a at 9 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.179	0.168	0.091	0.111	1.438	1.458	1.549
	Top	0.755	0.065	0.000	0.037	0.820	0.857	0.857
	Bottom	0.400*	0.400*	0.013	0.400*	0.813	1.200	1.213
	Right	0.031	0.003	1.128	1.029	1.162	1.063	1.128**
	Left	0.044	0.102	0.001	0.020	0.147	0.166	0.167
Simult Tx	Configuration	LTE Band 41 Ant 4B SAR (W/kg)	Bluetooth Ant 5 at 14.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.179	0.008	0.091	0.111	1.278	1.298	1.389
	Top	0.755	0.400*	0.000	0.037	1.155	1.192	1.192
	Bottom	0.400*	0.001	0.013	0.400*	0.414	0.801	0.814
	Right	0.031	0.246	1.128	1.029	1.405	1.306	1.374**
	Left	0.044	0.000	0.001	0.020	0.045	0.064	0.065

Table 11-169

GSM 1900 Ant 2A Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	GPRS 1900 Ant 2A SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.776	0.234	0.014	0.111	1.024	1.121	1.135
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.304	0.087	0.000	0.400*	0.391	0.791	0.791
	Right	0.723	0.148	0.199	1.029	1.070	1.029**	1.070**
	Left	0.400*	0.003	0.001	0.020	0.404	0.423	0.424
Simult Tx	Configuration	GPRS 1900 Ant 2A SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.776	1.028	0.014	0.111	1.028**	1.028**	1.028**
	Top	0.400*	0.408	0.000	0.037	0.808	0.845	0.845
	Bottom	0.304	0.400*	0.000	0.400*	0.704	1.104	1.104
	Right	0.723	0.003	0.199	1.029	0.925	1.032**	1.032**
	Left	0.400*	0.787	0.001	0.020	1.188	1.207	1.208
Simult Tx	Configuration	GPRS 1900 Ant 2A SAR (W/kg)	Bluetooth Ant 5 at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.776	0.005	0.014	0.111	0.795	0.892	0.906
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.304	0.001	0.000	0.400*	0.305	0.705	0.705
	Right	0.723	0.140	0.199	1.029	1.062	1.029**	1.062**
	Left	0.400*	0.000	0.001	0.020	0.401	0.420	0.421

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 203 of 234

Table 11-170

UMTS 1750 Ant 2A Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	UMTS 1750 Ant 2A SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.082	0.234	0.014	0.111	1.330	1.427	1.441
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.271	0.087	0.000	0.400*	0.358	0.758	0.758
	Right	0.926	0.148	0.199	1.029	1.273	1.074**	1.273**
	Left	0.400*	0.003	0.001	0.020	0.404	0.423	0.424
Simult Tx	Configuration	UMTS 1750 Ant 2A SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.082	1.028	0.014	0.111	1.096**	1.028**	1.096**
	Top	0.400*	0.408	0.000	0.037	0.808	0.845	0.845
	Bottom	0.271	0.400*	0.000	0.400*	0.671	1.071	1.071
	Right	0.926	0.003	0.199	1.029	1.128	1.032**	1.125**
	Left	0.400*	0.787	0.001	0.020	1.188	1.207	1.208
Simult Tx	Configuration	UMTS 1750 Ant 2A SAR (W/kg)	Bluetooth Ant 5 at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.082	0.005	0.014	0.111	1.101	1.198	1.212
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.271	0.001	0.000	0.400*	0.272	0.672	0.672
	Right	0.926	0.140	0.199	1.029	1.265	1.066**	1.265**
	Left	0.400*	0.000	0.001	0.020	0.401	0.420	0.421

Table 11-171

UMTS 1900 Ant 2A Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	UMTS 1900 Ant 2A SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.906	0.234	0.014	0.111	1.154	1.251	1.265
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.272	0.087	0.000	0.400*	0.359	0.759	0.759
	Right	0.810	0.148	0.199	1.029	1.157	1.029**	1.157**
	Left	0.400*	0.003	0.001	0.020	0.404	0.423	0.424
Simult Tx	Configuration	UMTS 1900 Ant 2A SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.906	1.028	0.014	0.111	1.028**	1.028**	1.028**
	Top	0.400*	0.408	0.000	0.037	0.808	0.845	0.845
	Bottom	0.272	0.400*	0.000	0.400*	0.672	1.072	1.072
	Right	0.810	0.003	0.199	1.029	1.012	1.032**	1.032**
	Left	0.400*	0.787	0.001	0.020	1.188	1.207	1.208
Simult Tx	Configuration	UMTS 1900 Ant 2A SAR (W/kg)	Bluetooth Ant 5 at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.906	0.005	0.014	0.111	0.925	1.022	1.036
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.272	0.001	0.000	0.400*	0.273	0.673	0.673
	Right	0.810	0.140	0.199	1.029	1.149	1.029**	1.149**
	Left	0.400*	0.000	0.001	0.020	0.401	0.420	0.421

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 204 of 234

Table 11-172

LTE Band 66 (AWS) Ant 2A Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	LTE Band 66 (AWS) Ant 2A SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.148	0.234	0.014	0.111	1.396	1.493	1.507
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.281	0.087	0.000	0.400*	0.368	0.768	0.768
	Right	0.878	0.148	0.199	1.029	1.225	1.029**	1.225**
	Left	0.400*	0.003	0.001	0.020	0.404	0.423	0.424
Simult Tx	Configuration	LTE Band 66 (AWS) Ant 2A SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.148	1.028	0.014	0.111	1.162**	1.028**	1.162**
	Top	0.400*	0.408	0.000	0.037	0.808	0.845	0.845
	Bottom	0.281	0.400*	0.000	0.400*	0.681	1.081	1.081
	Right	0.878	0.003	0.199	1.029	1.080	1.032**	1.077**
	Left	0.400*	0.787	0.001	0.020	1.188	1.207	1.208
Simult Tx	Configuration	LTE Band 66 (AWS) Ant 2A SAR (W/kg)	Bluetooth Ant 5 at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.148	0.005	0.014	0.111	1.167	1.264	1.278
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.281	0.001	0.000	0.400*	0.282	0.682	0.682
	Right	0.878	0.140	0.199	1.029	1.217	1.029**	1.217**
	Left	0.400*	0.000	0.001	0.020	0.401	0.420	0.421

Table 11-173

LTE Band 25 (PCS) Ant 2A Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	LTE Band 25 (PCS) Ant 2A SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.997	0.234	0.014	0.111	1.245	1.342	1.356
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.314	0.087	0.000	0.400*	0.401	0.801	0.801
	Right	0.900	0.148	0.199	1.029	1.247	1.048**	1.247**
	Left	0.400*	0.003	0.001	0.020	0.404	0.423	0.424
Simult Tx	Configuration	LTE Band 25 (PCS) Ant 2A SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.997	1.028	0.014	0.111	1.028**	1.028**	1.028**
	Top	0.400*	0.408	0.000	0.037	0.808	0.845	0.845
	Bottom	0.314	0.400*	0.000	0.400*	0.714	1.114	1.114
	Right	0.900	0.003	0.199	1.029	1.102	1.032**	1.099**
	Left	0.400*	0.787	0.001	0.020	1.188	1.207	1.208
Simult Tx	Configuration	LTE Band 25 (PCS) Ant 2A SAR (W/kg)	Bluetooth Ant 5 at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.997	0.005	0.014	0.111	1.016	1.113	1.127
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.314	0.001	0.000	0.400*	0.315	0.715	0.715
	Right	0.900	0.140	0.199	1.029	1.239	1.040**	1.239**
	Left	0.400*	0.000	0.001	0.020	0.401	0.420	0.421

FCC ID: BCGA1934



SAR EVALUATION REPORT

Approved by:

Quality Manager

Document S/N:

1C1806220015-01-R2.BCG

Test Dates:

08/13/18-09/13/18

DUT Type:

Tablet Device

Page 205 of 234

Table 11-174

LTE Band 30 Ant 2A Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	LTE Band 30 Ant 2A SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.727	0.234	0.014	0.111	0.975	1.072	1.086
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.333	0.087	0.000	0.400*	0.420	0.820	0.820
	Right	0.716	0.148	0.199	1.029	1.063	1.029**	1.063**
	Left	0.400*	0.003	0.001	0.020	0.404	0.423	0.424
Simult Tx	Configuration	LTE Band 30 Ant 2A SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.727	1.028	0.014	0.111	1.028**	1.028**	1.028**
	Top	0.400*	0.408	0.000	0.037	0.808	0.845	0.845
	Bottom	0.333	0.400*	0.000	0.400*	0.733	1.133	1.133
	Right	0.716	0.003	0.199	1.029	0.918	1.032**	1.032**
	Left	0.400*	0.787	0.001	0.020	1.188	1.207	1.208
Simult Tx	Configuration	LTE Band 30 Ant 2A SAR (W/kg)	Bluetooth Ant 5 at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.727	0.005	0.014	0.111	0.746	0.843	0.857
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.333	0.001	0.000	0.400*	0.334	0.734	0.734
	Right	0.716	0.140	0.199	1.029	1.055	1.029**	1.055**
	Left	0.400*	0.000	0.001	0.020	0.401	0.420	0.421

Table 11-175

LTE Band 7 Ant 2A Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	LTE Band 7 Ant 2A SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.834	0.234	0.014	0.111	1.082	1.179	1.193
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.430	0.087	0.000	0.400*	0.517	0.917	0.917
	Right	0.651	0.148	0.199	1.029	0.998	1.029**	1.029**
	Left	0.400*	0.003	0.001	0.020	0.404	0.423	0.424
Simult Tx	Configuration	LTE Band 7 Ant 2A SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.834	1.028	0.014	0.111	1.028**	1.028**	1.028**
	Top	0.400*	0.408	0.000	0.037	0.808	0.845	0.845
	Bottom	0.430	0.400*	0.000	0.400*	0.830	1.230	1.230
	Right	0.651	0.003	0.199	1.029	0.853	1.032**	1.032**
	Left	0.400*	0.787	0.001	0.020	1.188	1.207	1.208
Simult Tx	Configuration	LTE Band 7 Ant 2A SAR (W/kg)	Bluetooth Ant 5 at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.834	0.005	0.014	0.111	0.853	0.950	0.964
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.430	0.001	0.000	0.400*	0.431	0.831	0.831
	Right	0.651	0.140	0.199	1.029	0.990	1.029**	1.029**
	Left	0.400*	0.000	0.001	0.020	0.401	0.420	0.421

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 206 of 234

Table 11-176

LTE Band 41 Ant 2A Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	LTE Band 41 Ant 2A SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.130	0.234	0.014	0.111	1.378	1.475	1.489
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.556	0.087	0.000	0.400*	0.643	1.043	1.043
	Right	0.654	0.148	0.199	1.029	1.001	1.029**	1.029**
	Left	0.400*	0.003	0.001	0.020	0.404	0.423	0.424
Simult Tx	Configuration	LTE Band 41 Ant 2A SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.130	1.028	0.014	0.111	1.144**	1.130**	1.144**
	Top	0.400*	0.408	0.000	0.037	0.808	0.845	0.845
	Bottom	0.556	0.400*	0.000	0.400*	0.956	1.356	1.356
	Right	0.654	0.003	0.199	1.029	0.856	1.032**	1.032**
	Left	0.400*	0.787	0.001	0.020	1.188	1.207	1.208
Simult Tx	Configuration	LTE Band 41 Ant 2A SAR (W/kg)	Bluetooth Ant 5 at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.130	0.005	0.014	0.111	1.149	1.246	1.260
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.556	0.001	0.000	0.400*	0.557	0.957	0.957
	Right	0.654	0.140	0.199	1.029	0.993	1.029**	1.029**
	Left	0.400*	0.000	0.001	0.020	0.401	0.420	0.421

Table 11-177

GSM 1900 Ant 2B Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	GPRS 1900 Ant 2B SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.807	0.234	0.091	0.111	1.132	1.152	1.243
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.538	0.087	0.013	0.400*	0.638	1.025	1.038
	Right	0.050	0.148	1.128	1.029	1.326	1.227	1.326**
	Left	0.400*	0.003	0.001	0.020	0.404	0.423	0.424
Simult Tx	Configuration	GPRS 1900 Ant 2B SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.807	1.028	0.091	0.111	1.028**	1.028**	1.028**
	Top	0.400*	0.408	0.000	0.037	0.808	0.845	0.845
	Bottom	0.538	0.400*	0.013	0.400*	0.951	1.338	1.351
	Right	0.050	0.003	1.128	1.029	1.181	1.082	1.178**
	Left	0.400*	0.787	0.001	0.020	1.188	1.207	1.208
Simult Tx	Configuration	GPRS 1900 Ant 2B SAR (W/kg)	Bluetooth Ant 5 at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.807	0.005	0.091	0.111	0.903	0.923	1.014
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.538	0.001	0.013	0.400*	0.552	0.939	0.952
	Right	0.050	0.140	1.128	1.029	1.318	1.219	1.318**
	Left	0.400*	0.000	0.001	0.020	0.401	0.420	0.421

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 207 of 234

Table 11-178

UMTS 1750 Ant 2B Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	UMTS 1750 Ant 2B SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.995	0.234	0.091	0.111	1.320	1.340	1.431
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.608	0.087	0.013	0.400*	0.708	1.095	1.108
	Right	0.044	0.148	1.128	1.029	1.320	1.221	1.320**
	Left	0.400*	0.003	0.001	0.020	0.404	0.423	0.424
Simult Tx	Configuration	UMTS 1750 Ant 2B SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.995	1.028	0.091	0.111	1.086**	1.028**	1.086**
	Top	0.400*	0.408	0.000	0.037	0.808	0.845	0.845
	Bottom	0.608	0.400*	0.013	0.400*	1.021	1.408	1.421
	Right	0.044	0.003	1.128	1.029	1.175	1.076	1.172**
	Left	0.400*	0.787	0.001	0.020	1.188	1.207	1.208
Simult Tx	Configuration	UMTS 1750 Ant 2B SAR (W/kg)	Bluetooth Ant 5 at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.995	0.005	0.091	0.111	1.091	1.111	1.202
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.608	0.001	0.013	0.400*	0.622	1.009	1.022
	Right	0.044	0.140	1.128	1.029	1.312	1.213	1.312**
	Left	0.400*	0.000	0.001	0.020	0.401	0.420	0.421

Table 11-179

UMTS 1900 Ant 2B Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	UMTS 1900 Ant 2B SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.864	0.234	0.091	0.111	1.189	1.209	1.300
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.657	0.087	0.013	0.400*	0.757	1.144	1.157
	Right	0.044	0.148	1.128	1.029	1.320	1.221	1.320**
	Left	0.400*	0.003	0.001	0.020	0.404	0.423	0.424
Simult Tx	Configuration	UMTS 1900 Ant 2B SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.864	1.028	0.091	0.111	1.028**	1.028**	1.028**
	Top	0.400*	0.408	0.000	0.037	0.808	0.845	0.845
	Bottom	0.657	0.400*	0.013	0.400*	1.070	1.457	1.470
	Right	0.044	0.003	1.128	1.029	1.175	1.076	1.172**
	Left	0.400*	0.787	0.001	0.020	1.188	1.207	1.208
Simult Tx	Configuration	UMTS 1900 Ant 2B SAR (W/kg)	Bluetooth Ant 5 at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.864	0.005	0.091	0.111	0.960	0.980	1.071
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.657	0.001	0.013	0.400*	0.671	1.058	1.071
	Right	0.044	0.140	1.128	1.029	1.312	1.213	1.312**
	Left	0.400*	0.000	0.001	0.020	0.401	0.420	0.421

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 208 of 234

Table 11-180

LTE Band 66 (AWS) Ant 2B Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	LTE Band 66 (AWS) Ant 2B SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.934	0.234	0.091	0.111	1.259	1.279	1.370
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.531	0.087	0.013	0.400*	0.631	1.018	1.031
	Right	0.037	0.148	1.128	1.029	1.313	1.214	1.313**
	Left	0.400*	0.003	0.001	0.020	0.404	0.423	0.424
Simult Tx	Configuration	LTE Band 66 (AWS) Ant 2B SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.934	1.028	0.091	0.111	1.028**	1.028**	1.028**
	Top	0.400*	0.408	0.000	0.037	0.808	0.845	0.845
	Bottom	0.531	0.400*	0.013	0.400*	0.944	1.331	1.344
	Right	0.037	0.003	1.128	1.029	1.168	1.069	1.165**
	Left	0.400*	0.787	0.001	0.020	1.188	1.207	1.208
Simult Tx	Configuration	LTE Band 66 (AWS) Ant 2B SAR (W/kg)	Bluetooth Ant 5 at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.934	0.005	0.091	0.111	1.030	1.050	1.141
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.531	0.001	0.013	0.400*	0.545	0.932	0.945
	Right	0.037	0.140	1.128	1.029	1.305	1.206	1.305**
	Left	0.400*	0.000	0.001	0.020	0.401	0.420	0.421

Table 11-181

LTE Band 25 (PCS) Ant 2B Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	LTE Band 25 (PCS) Ant 2B SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.955	0.234	0.091	0.111	1.280	1.300	1.391
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.636	0.087	0.013	0.400*	0.736	1.123	1.136
	Right	0.050	0.148	1.128	1.029	1.326	1.227	1.326**
	Left	0.400*	0.003	0.001	0.020	0.404	0.423	0.424
Simult Tx	Configuration	LTE Band 25 (PCS) Ant 2B SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.955	1.028	0.091	0.111	1.046**	1.028**	1.046**
	Top	0.400*	0.408	0.000	0.037	0.808	0.845	0.845
	Bottom	0.636	0.400*	0.013	0.400*	1.049	1.436	1.449
	Right	0.050	0.003	1.128	1.029	1.181	1.082	1.178**
	Left	0.400*	0.787	0.001	0.020	1.188	1.207	1.208
Simult Tx	Configuration	LTE Band 25 (PCS) Ant 2B SAR (W/kg)	Bluetooth Ant 5 at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.955	0.005	0.091	0.111	1.051	1.071	1.162
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.636	0.001	0.013	0.400*	0.650	1.037	1.050
	Right	0.050	0.140	1.128	1.029	1.318	1.219	1.318**
	Left	0.400*	0.000	0.001	0.020	0.401	0.420	0.421

FCC ID: BCGA1934



SAR EVALUATION REPORT

Approved by:

Quality Manager

Document S/N:

1C1806220015-01-R2.BCG

Test Dates:

08/13/18-09/13/18

DUT Type:

Tablet Device

Page 209 of 234

Table 11-182

LTE Band 30 Ant 2B Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	LTE Band 30 Ant 2B SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.101	0.234	0.091	0.111	1.426	1.446	1.537
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.614	0.087	0.013	0.400*	0.714	1.101	1.114
	Right	0.063	0.148	1.128	1.029	1.339	1.240	1.339**
	Left	0.400*	0.003	0.001	0.020	0.404	0.423	0.424
Simult Tx	Configuration	LTE Band 30 Ant 2B SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.101	1.028	0.091	0.111	1.192**	1.101**	1.192**
	Top	0.400*	0.408	0.000	0.037	0.808	0.845	0.845
	Bottom	0.614	0.400*	0.013	0.400*	1.027	1.414	1.427
	Right	0.063	0.003	1.128	1.029	1.194	1.095	1.191**
	Left	0.400*	0.787	0.001	0.020	1.188	1.207	1.208
Simult Tx	Configuration	LTE Band 30 Ant 2B SAR (W/kg)	Bluetooth Ant 5 at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.101	0.005	0.091	0.111	1.197	1.217	1.308
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.614	0.001	0.013	0.400*	0.628	1.015	1.028
	Right	0.063	0.140	1.128	1.029	1.331	1.232	1.331**
	Left	0.400*	0.000	0.001	0.020	0.401	0.420	0.421

Table 11-183

LTE Band 7 Ant 2B Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	LTE Band 7 Ant 2B SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.138	0.234	0.091	0.111	1.463	1.483	1.574
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.613	0.087	0.013	0.400*	0.713	1.100	1.113
	Right	0.043	0.148	1.128	1.029	1.319	1.220	1.319**
	Left	0.400*	0.003	0.001	0.020	0.404	0.423	0.424
Simult Tx	Configuration	LTE Band 7 Ant 2B SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.138	1.028	0.091	0.111	1.229**	1.138**	1.229**
	Top	0.400*	0.408	0.000	0.037	0.808	0.845	0.845
	Bottom	0.613	0.400*	0.013	0.400*	1.026	1.413	1.426
	Right	0.043	0.003	1.128	1.029	1.174	1.075	1.171**
	Left	0.400*	0.787	0.001	0.020	1.188	1.207	1.208
Simult Tx	Configuration	LTE Band 7 Ant 2B SAR (W/kg)	Bluetooth Ant 5 at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.138	0.005	0.091	0.111	1.234	1.254	1.345
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.613	0.001	0.013	0.400*	0.627	1.014	1.027
	Right	0.043	0.140	1.128	1.029	1.311	1.212	1.311**
	Left	0.400*	0.000	0.001	0.020	0.401	0.420	0.421

FCC ID: BCGA1934



SAR EVALUATION REPORT

Approved by:

Quality Manager

Document S/N:

1C1806220015-01-R2.BCG

Test Dates:

08/13/18-09/13/18

DUT Type:

Tablet Device

Page 210 of 234

Table 11-184

LTE Band 41 Ant 2B Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	LTE Band 41 Ant 2B SAR (W/kg)	Bluetooth Ant 2a at 8 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.103	0.234	0.091	0.111	1.428	1.448	1.539
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.450	0.087	0.013	0.400*	0.550	0.937	0.950
	Right	0.033	0.148	1.128	1.029	1.309	1.210	1.309**
	Left	0.400*	0.003	0.001	0.020	0.404	0.423	0.424
Simult Tx	Configuration	LTE Band 41 Ant 2B SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.103	1.028	0.091	0.111	1.194**	1.103**	1.194**
	Top	0.400*	0.408	0.000	0.037	0.808	0.845	0.845
	Bottom	0.450	0.400*	0.013	0.400*	0.863	1.250	1.263
	Right	0.033	0.003	1.128	1.029	1.164	1.065	1.161**
	Left	0.400*	0.787	0.001	0.020	1.188	1.207	1.208
Simult Tx	Configuration	LTE Band 41 Ant 2B SAR (W/kg)	Bluetooth Ant 5 at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.103	0.005	0.091	0.111	1.199	1.219	1.310
	Top	0.400*	0.400*	0.000	0.037	0.800	0.837	0.837
	Bottom	0.450	0.001	0.013	0.400*	0.464	0.851	0.864
	Right	0.033	0.140	1.128	1.029	1.301	1.202	1.301**
	Left	0.400*	0.000	0.001	0.020	0.401	0.420	0.421

Table 11-185

Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	Bluetooth Ant 2a at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body SAR	Back	0.619	0.091	0.710
	Top	0.400*	0.000	0.400
	Bottom	0.284	0.013	0.297
	Right	0.319	1.128	1.447
	Left	0.003	0.001	0.004
Simult Tx	Configuration	Bluetooth Ant 5 at 14.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body SAR	Back	0.008	0.091	0.099
	Top	0.400*	0.000	0.400
	Bottom	0.001	0.013	0.014
	Right	0.246	1.128	1.374
	Left	0.000	0.001	0.001
Simult Tx	Configuration	Bluetooth Ant 2a at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body SAR	Back	0.619	0.111	0.730
	Top	0.400*	0.037	0.437
	Bottom	0.284	0.400*	0.684
	Right	0.319	1.029	1.348
	Left	0.003	0.020	0.023
Simult Tx	Configuration	Bluetooth Ant 4a SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body SAR	Back	1.028	0.091	1.119
	Top	0.408	0.000	0.408
	Bottom	0.400*	0.013	0.413
	Right	0.003	1.128	1.131
	Left	0.787	0.001	0.788
Simult Tx	Configuration	Bluetooth Ant 4a SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body SAR	Back	1.028	0.111	1.139
	Top	0.408	0.037	0.445
	Bottom	0.400*	0.400*	0.800
	Right	0.003	1.029	1.032
	Left	0.787	0.020	0.807
Simult Tx	Configuration	Bluetooth Ant 5 at 14.5 dBm SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body SAR	Back	0.008	0.111	0.119
	Top	0.400*	0.037	0.437
	Bottom	0.001	0.400*	0.401
	Right	0.246	1.029	1.275
	Left	0.000	0.020	0.020

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 211 of 234

Table 11-186
Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN MIMO

Simult Tx	Configuration	Bluetooth Ant 2a at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Body SAR	Back	0.619	0.091	0.111	0.821
	Top	0.400*	0.000	0.037	0.437
	Bottom	0.284	0.013	0.400*	0.697
	Right	0.319	1.128	1.029	1.447**
	Left	0.003	0.001	0.020	0.024
Simult Tx	Configuration	Bluetooth Ant 4a SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Body SAR	Back	1.028	0.091	0.111	1.230
	Top	0.408	0.000	0.037	0.445
	Bottom	0.400*	0.013	0.400*	0.813
	Right	0.003	1.128	1.029	1.128**
	Left	0.787	0.001	0.020	0.808
Simult Tx	Configuration	Bluetooth Ant 5 at 14.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Body SAR	Back	0.008	0.091	0.111	0.210
	Top	0.400*	0.000	0.037	0.437
	Bottom	0.001	0.013	0.400*	0.414
	Right	0.246	1.128	1.029	1.374**
	Left	0.000	0.001	0.020	0.021

Notes:

- When the antenna separation distance was > 50 mm, an estimated SAR of 0.4 W/kg was used to determine the simultaneous transmission SAR exclusion for test positions excluded per FCC KDB Publication 447498 D01v06.

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 212 of 234

11.4 Spatial Separation Analysis

Per FCC KDB Publication 248227, antennas may be considered spatially separated when the aggregate SAR from multiple antennas at any location in the combined SAR distribution is either ≤ 1.2 W/kg where at least 90% of the SAR is attributed to a single SAR distribution or ≤ 0.4 W/kg where no more than one SAR distribution is contributing > 0.1 W/kg.

Spatial separation was determined by inspection of the area scan SAR distributions to confirm that at all locations, SAR was < 1.2 W/kg, where at least 90% of the SAR is attributed to a single SAR distribution. See below for illustrations of the spatial separated antennas considered.

11.4.1 Back Side Spatial Separation Analysis

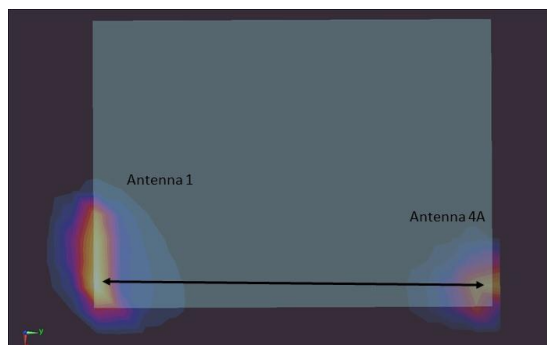


Figure 11-1
Back Side Spatial Separation for Antenna 4A and Antenna 1

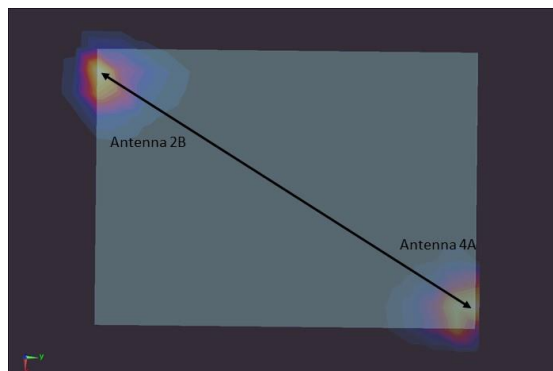


Figure 11-2
Back Side Spatial Separation for Antenna 4A and Antenna 2B

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 213 of 234

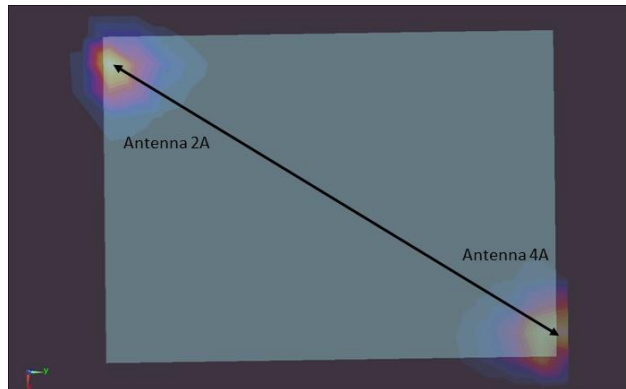


Figure 11-3
Back Side Spatial Separation for Antenna 4A and Antenna 2A

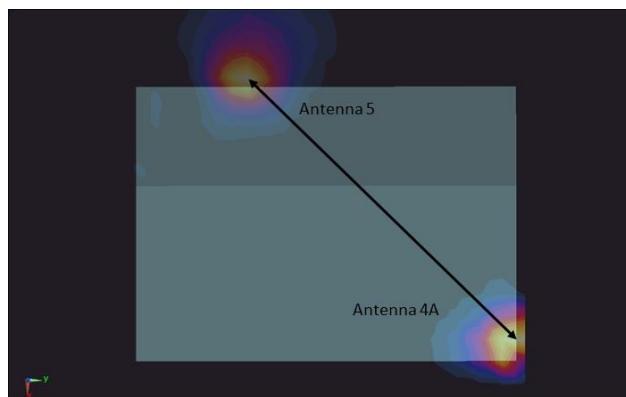


Figure 11-4
Back Side Spatial Separation for Antenna 4A and Antenna 5

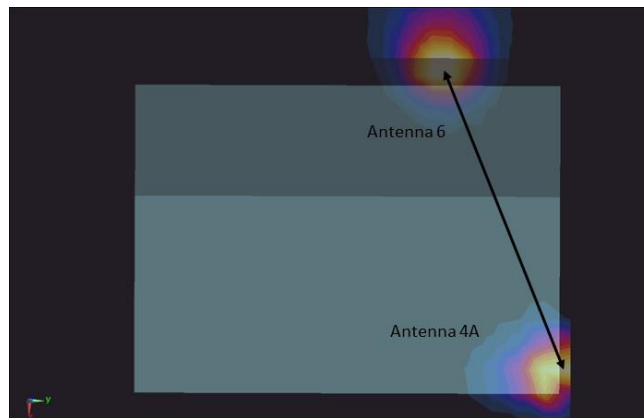


Figure 11-5
Back Side Spatial Separation for Antenna 4A and Antenna 6

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 214 of 234

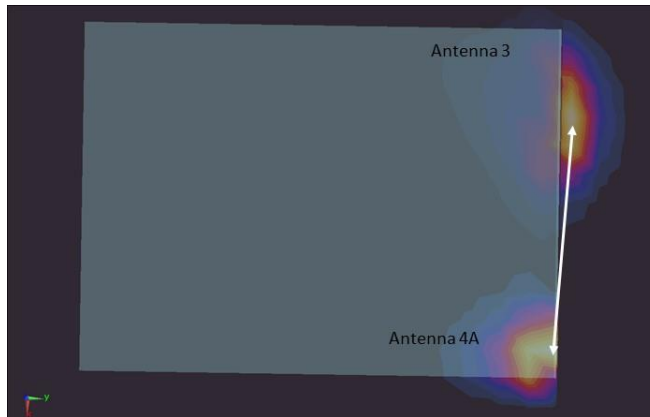


Figure 11-6
Back Side Spatial Separation for Antenna 4A and Antenna 3

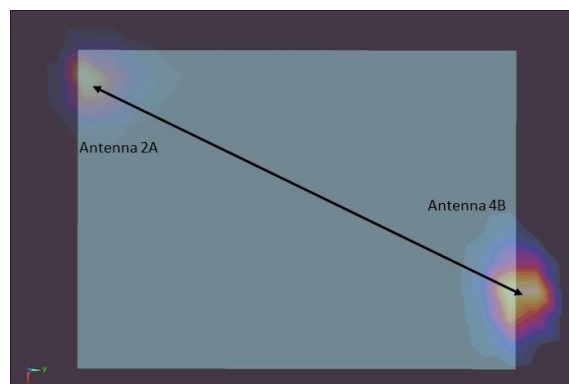


Figure 11-7
Back Side Spatial Separation for Antenna 4B and Antenna 2A

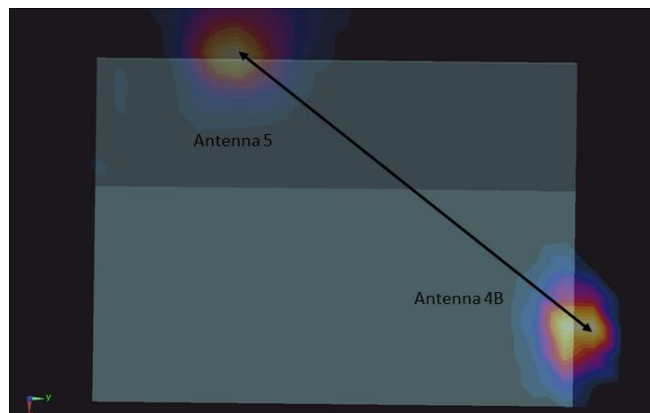


Figure 11-8
Back Side Spatial Separation for Antenna 4B and Antenna 5

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 215 of 234

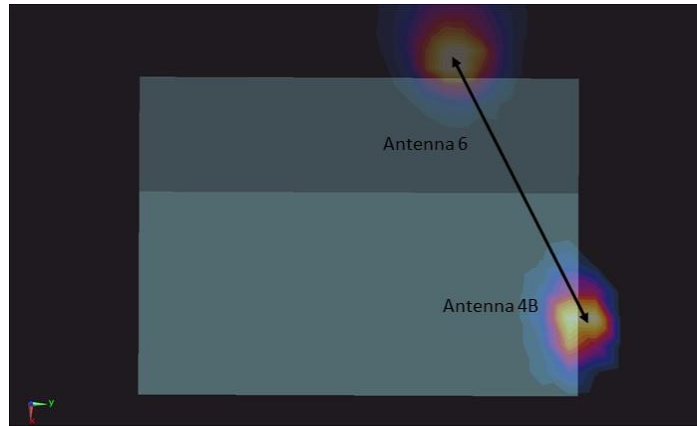


Figure 11-9
Back Side Spatial Separation for Antenna 4B and Antenna 6

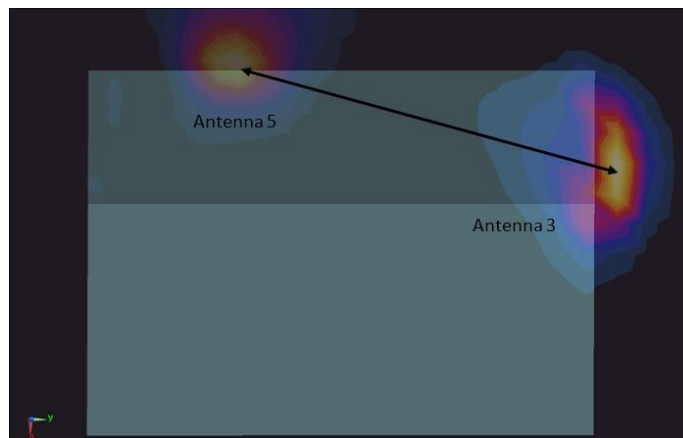


Figure 11-10
Back Side Spatial Separation for Antenna 3 and Antenna 5

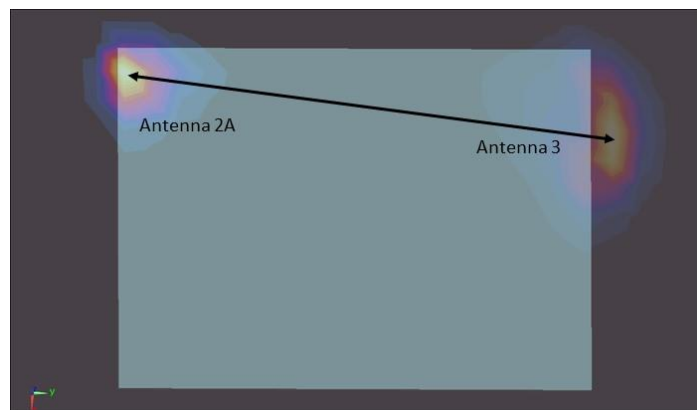


Figure 11-11
Back Side Spatial Separation for Antenna 3 and Antenna 2A

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 216 of 234

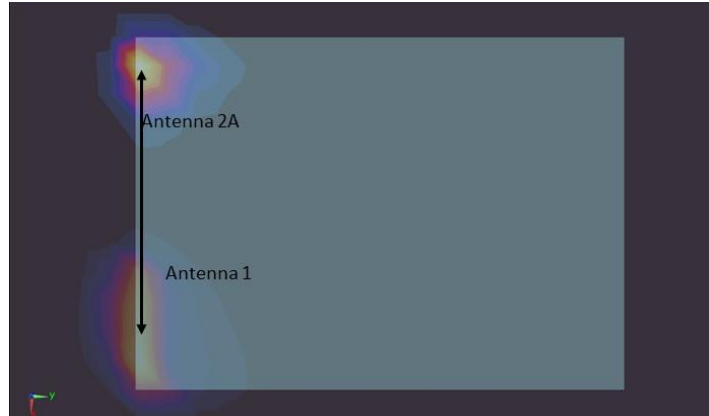


Figure 11-12
Back Side Spatial Separation for Antenna 1 and Antenna 2A

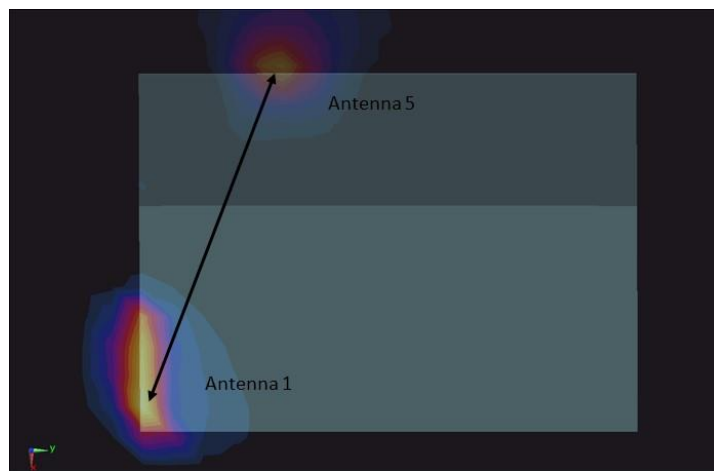


Figure 11-13
Back Side Spatial Separation for Antenna 1 and Antenna 5

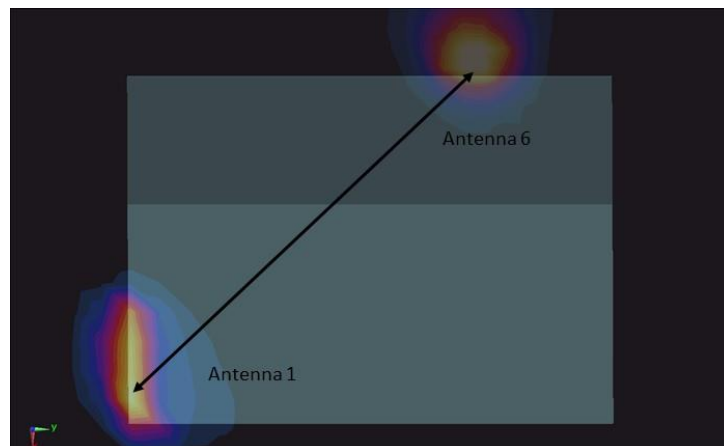


Figure 11-14
Back Side Spatial Separation for Antenna 1 and Antenna 6

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 217 of 234

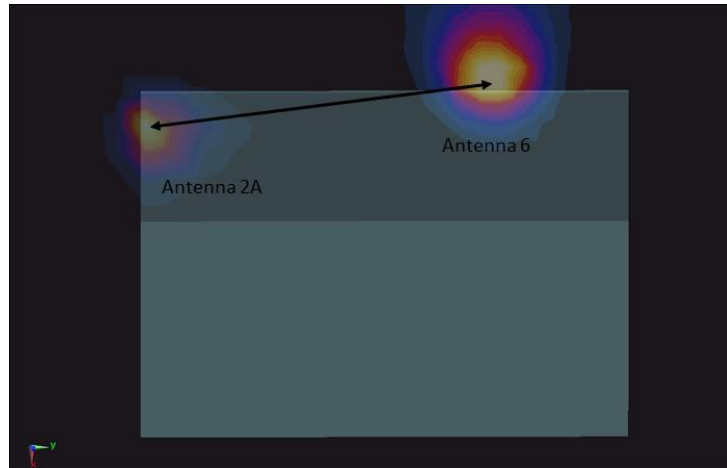


Figure 11-15
Back Side Spatial Separation for Antenna 2A and Antenna 6

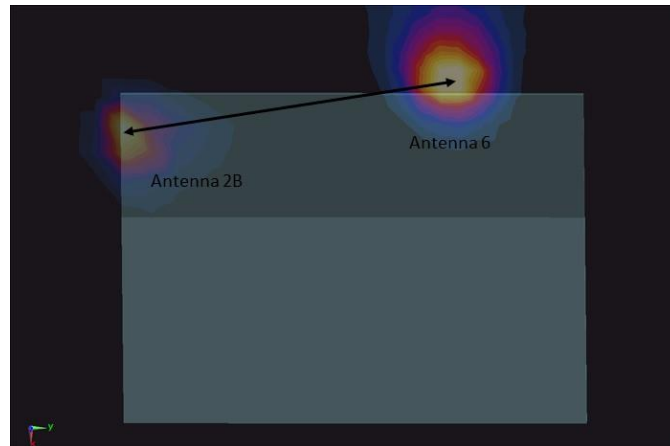


Figure 11-16
Back Side Spatial Separation for Antenna 2B and Antenna 6

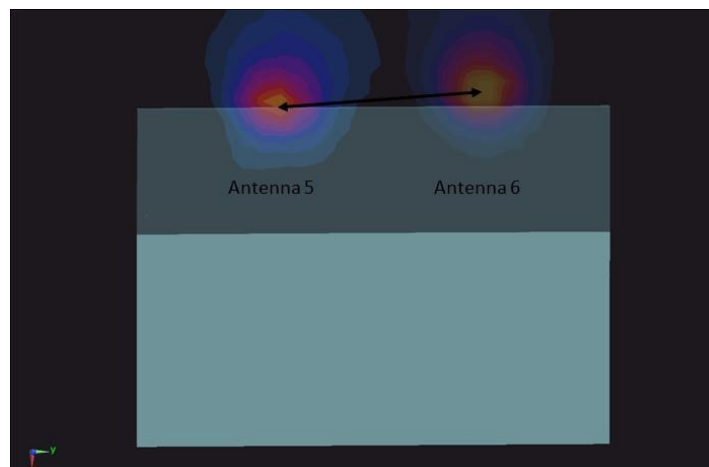


Figure 11-17
Back Side Spatial Separation for Antenna 5 and Antenna 6

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 218 of 234

11.4.2 Right Edge Spatial Separation Analysis

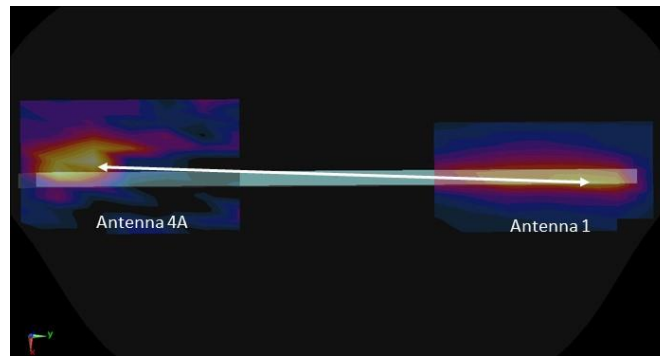


Figure 11-18
Right Edge Spatial Separation for Antenna 4A and Antenna 1

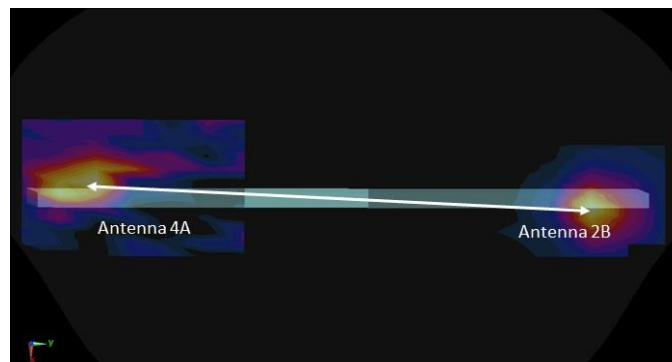


Figure 11-19
Right Edge Spatial Separation for Antenna 4A and Antenna 2B

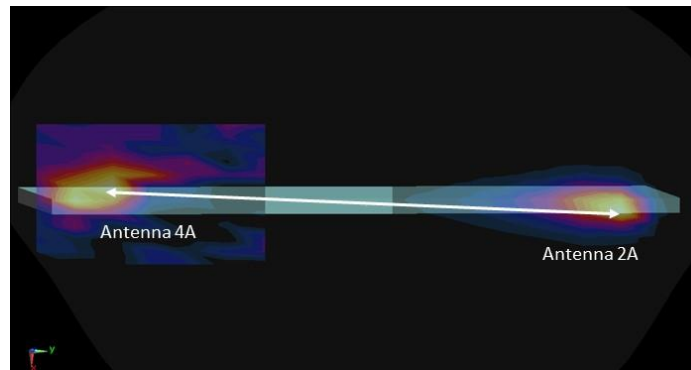


Figure 11-20
Right Edge Spatial Separation for Antenna 4A and Antenna 2A

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 219 of 234

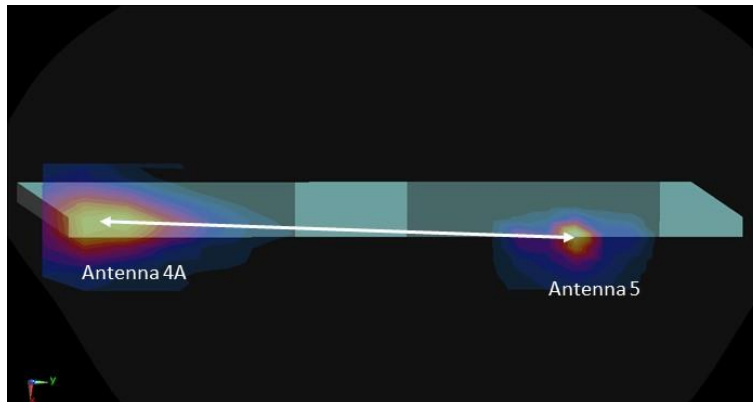


Figure 11-21
Right Edge Spatial Separation for Antenna 4A and Antenna 5

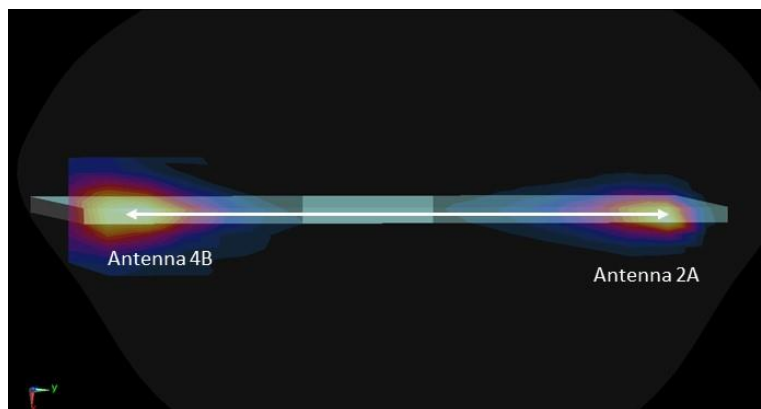


Figure 11-22
Right Edge Spatial Separation for Antenna 4B and Antenna 2A

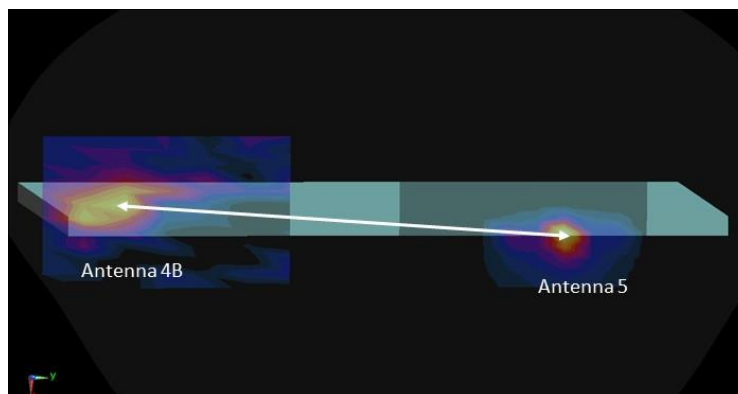


Figure 11-23
Right Edge Spatial Separation for Antenna 4B and Antenna 5

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 220 of 234

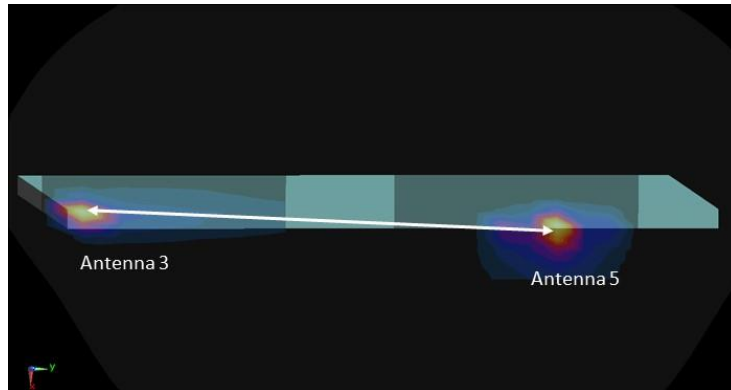


Figure 11-24
Right Edge Spatial Separation for Antenna 3 and Antenna 5

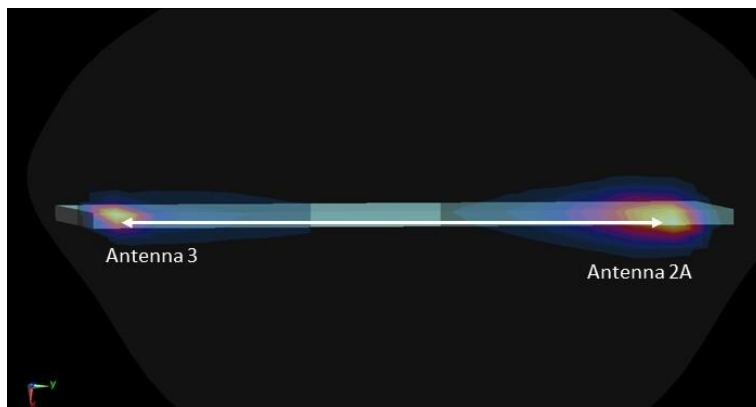


Figure 11-25
Right Edge Spatial Separation for Antenna 3 and Antenna 2A

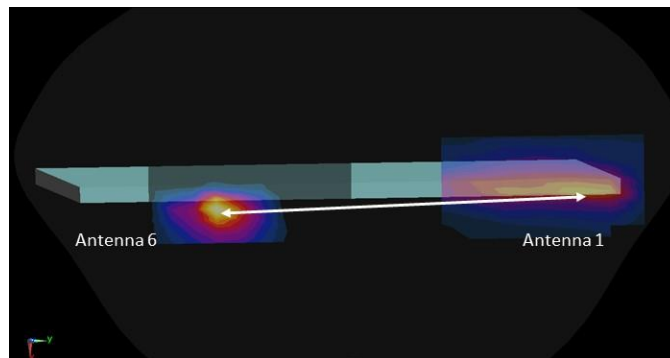


Figure 11-26
Right Edge Spatial Separation for Antenna 1 and Antenna 6

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 221 of 234

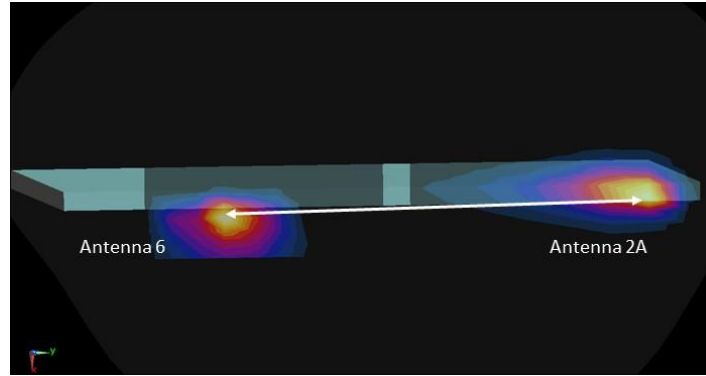


Figure 11-27
Right Edge Spatial Separation for Antenna 2A and Antenna 6

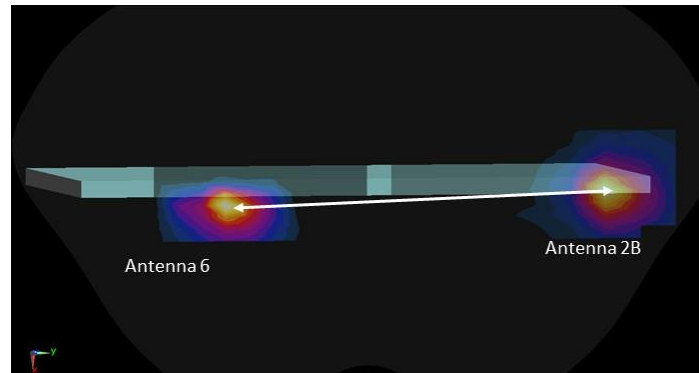


Figure 11-28
Right Edge Spatial Separation for Antenna 2B and Antenna 6

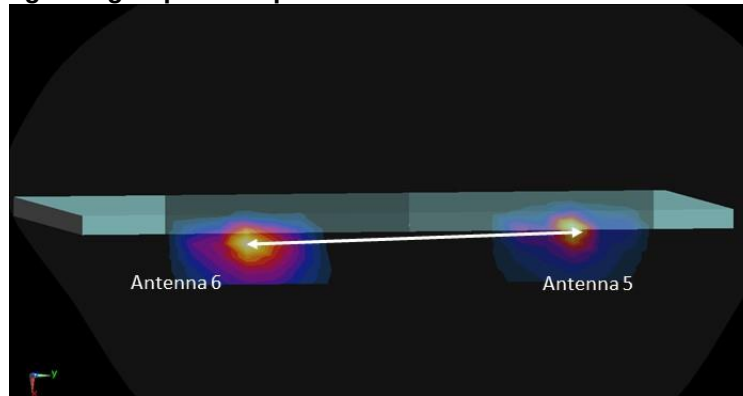


Figure 11-29
Right Edge Spatial Separation for Antenna 5 and Antenna 6

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 222 of 234

11.4.3 Left Edge Spatial Separation Analysis

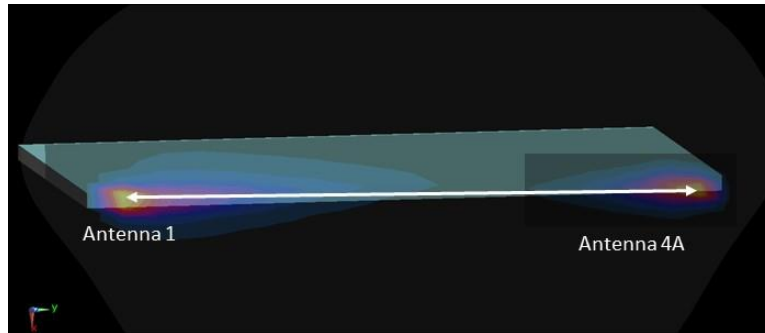


Figure 11-30
Left Edge Spatial Separation for Antenna 1 and Antenna 4A

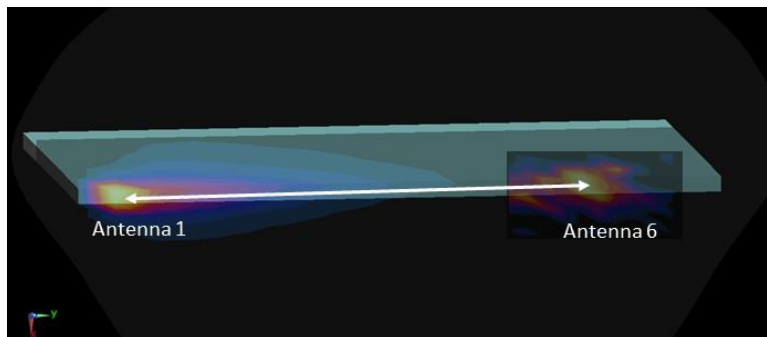


Figure 11-31
Left Edge Spatial Separation for Antenna 1 and Antenna 6

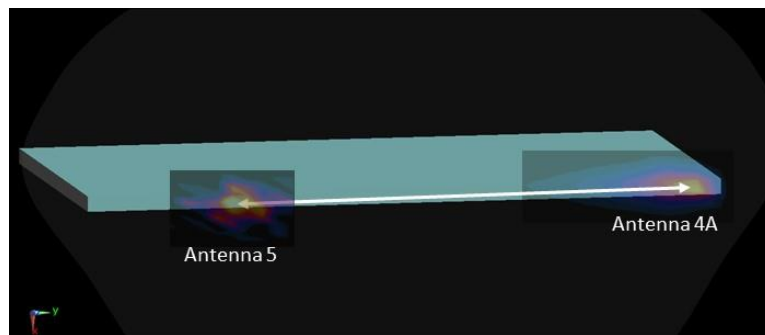


Figure 11-32
Left Edge Spatial Separation for Antenna 4A and Antenna 5

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 223 of 234

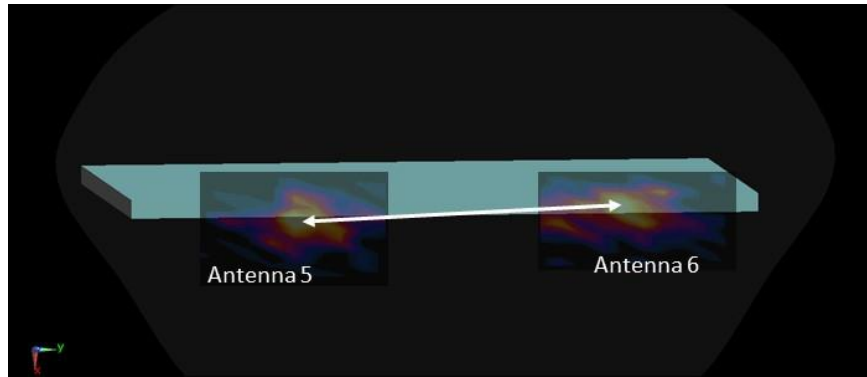


Figure 11-33
Left Edge Spatial Separation for Antenna 5 and Antenna 6

11.5 Simultaneous Transmission Conclusion

The above numerical summed SAR results and spatial separation analysis for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528-2013 Section 6.3.4.1.2.

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 224 of 234

12 SAR MEASUREMENT VARIABILITY

12.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

Table 12-1
Body SAR Measurement Variability Results

BODY VARIABILITY RESULTS																
Band	FREQUENCY		Component Carrier	Mode	Antenna Config.	Service	Data Rate (Mbps)	Side	Spacing	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.								(W/kg)	(W/kg)		(W/kg)		(W/kg)	
750	707.50	23095	N/A	LTE Band 12, 10 MHz Bandwidth	Ant 1	QPSK, 1 RB, 25 RB Offset	N/A	left	0 mm	1.180	1.100	1.07	N/A	N/A	N/A	N/A
835	836.50	20525	N/A	LTE Band 5 (Cell), 10 MHz Bandwidth	Ant 1	QPSK, 25 RB, 0 RB Offset	N/A	left	0 mm	1.170	1.020	1.15	N/A	N/A	N/A	N/A
1750	1770.00	132572	N/A	LTE Band 66 (AWS), 20 MHz Bandwidth	Ant 2A	QPSK, 1 RB, 0 RB Offset	N/A	back	0 mm	1.130	1.110	1.02	N/A	N/A	N/A	N/A
1900	1860.00	26140	N/A	LTE Band 25 (PCS), 20 MHz Bandwidth	Ant 2A	QPSK, 1 RB, 0 RB Offset	N/A	back	0 mm	0.991	0.839	1.18	N/A	N/A	N/A	N/A
2300	2310.00	27710	N/A	LTE Band 30, 10 MHz Bandwidth	Ant 2B	QPSK, 1 RB, 49 RB Offset	N/A	back	0 mm	0.975	0.959	1.02	N/A	N/A	N/A	N/A
2450	2412.00	1	N/A	802.11b, 22 MHz Bandwidth	Ant 2A	DSSS	1	back	0 mm	1.110	0.994	1.12	N/A	N/A	N/A	N/A
2600	2535.00	21100	PCC	LTE Band 7, 20 MHz Bandwidth, ULCA	Ant 2B	QPSK, 1 RB, 0 RB Offset	N/A	back	0 mm	1.130	1.090	1.04	N/A	N/A	N/A	N/A
	2515.20	20902	SCC			QPSK, 1 RB, 99 RB Offset	N/A									
5250	5270.00	54	N/A	802.11n, 40 MHz Bandwidth	Ant 5	OFDM	13.5	right	0 mm	1.060	1.040	1.02	N/A	N/A	N/A	N/A
5600	5610.00	122	N/A	802.11ac, 80 MHz Bandwidth	Ant 6	OFDM	29.3	right	0 mm	0.944	0.847	1.11	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT									Body							
Spatial Peak									1.6 W/kg (mW/g)							
Uncontrolled Exposure/General Population									averaged over 1 gram							

12.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 225 of 234

13 ADDITIONAL TESTING PER FCC GUIDANCE


13.1 LTE Band 41 Power Class 2 and Power Class 3 Linearity

This device supports Power Class 2 and Power Class 3 operations for LTE Band 41. The highest available duty cycle for Power Class 2 operations is 43.3 % using UL-DL configuration 1. Per May 2017 TCB Workshop Notes based on the device behavior, all SAR tests were performed using Power Class 3. SAR with Power Class 2 at the highest power and available duty factor was additionally performed for the Power Class 3 configuration with the highest SAR for each exposure condition. The linearity between the Power Class 2 and Power Class 3 SAR results and the respective frame averaged powers was calculated to determine that the results were linear. Per May 2017 TCB Workshop, no additional SAR measurements were required since the linearity between power classes as < 10% and all reported SAR values were < 1.4 W/kg for 1g and < 3.5 W/kg for 10g.

LTE Band 41 SAR testing with power class 2 at the highest power and available duty factor was additionally performed for the power class 3 configuration with the highest SAR for each exposure condition.

Table 13-1
LTE Band 41 Body Linearity Data – Ant 4a


	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	14.5	14.5
Measured Output Power (dBm)	14.32	14.3
Measured SAR (W/kg)	1.08	0.675
Measured Power (mW)	27.04	26.92
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	17.12	11.65
% deviation from expected linearity		-8.21%

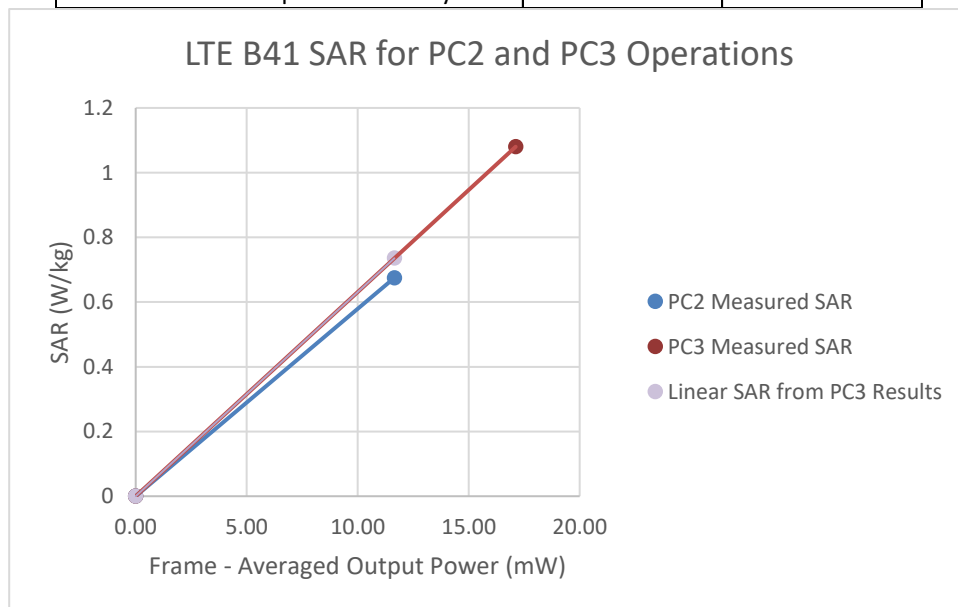

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 226 of 234

Table 13-2
LTE Band 41 Body Linearity Data – Ant 4b

	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	15	15
Measured Output Power (dBm)	14.72	14.78
Measured SAR (W/kg)	1.08	0.796
Measured Power (mW)	29.65	30.06
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	18.77	13.02
% deviation from expected linearity		6.27%

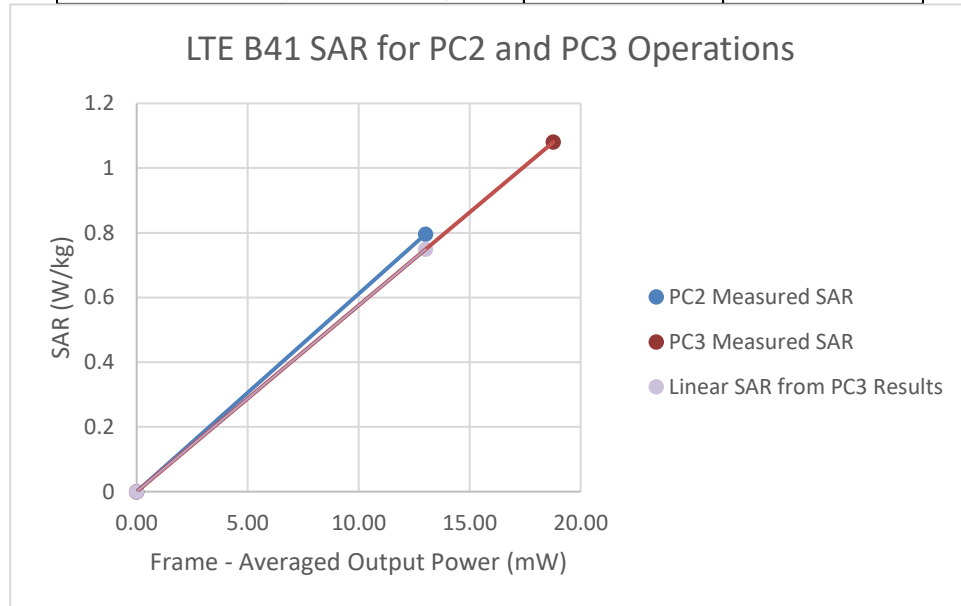


FCC ID: BCGA1934	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 227 of 234

Table 13-3
LTE Band 41 Body Linearity Data – Ant 2a

	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	14.8	14.8
Measured Output Power (dBm)	14.73	14.77
Measured SAR (W/kg)	1.06	0.695
Measured Power (mW)	29.72	29.99
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	18.81	12.99
% deviation from expected linearity		-5.03%


LTE B41 SAR for PC2 and PC3 Operations

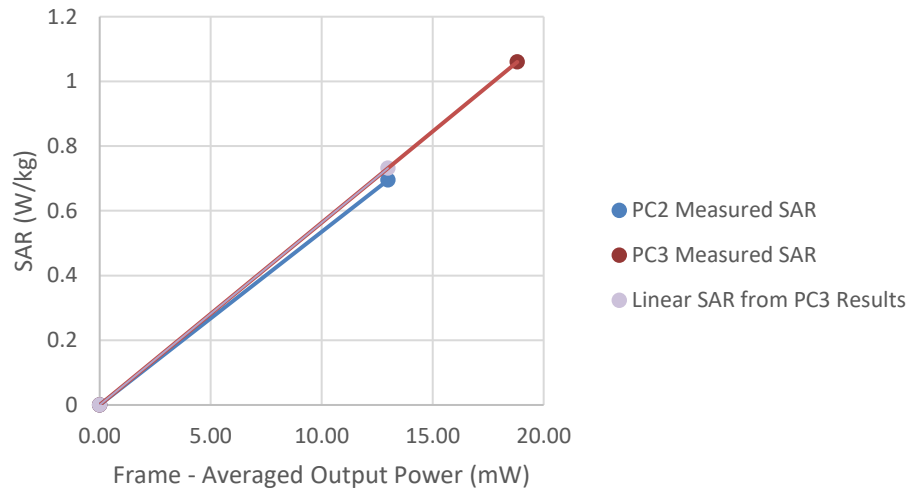

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 228 of 234

Table 13-4
LTE Band 41 Body Linearity Data – Ant 2b

	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	14.5	14.5
Measured Output Power (dBm)	14.45	14.46
Measured SAR (W/kg)	1.09	0.722
Measured Power (mW)	27.86	27.93
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	17.64	12.09
% deviation from expected linearity		-3.39%

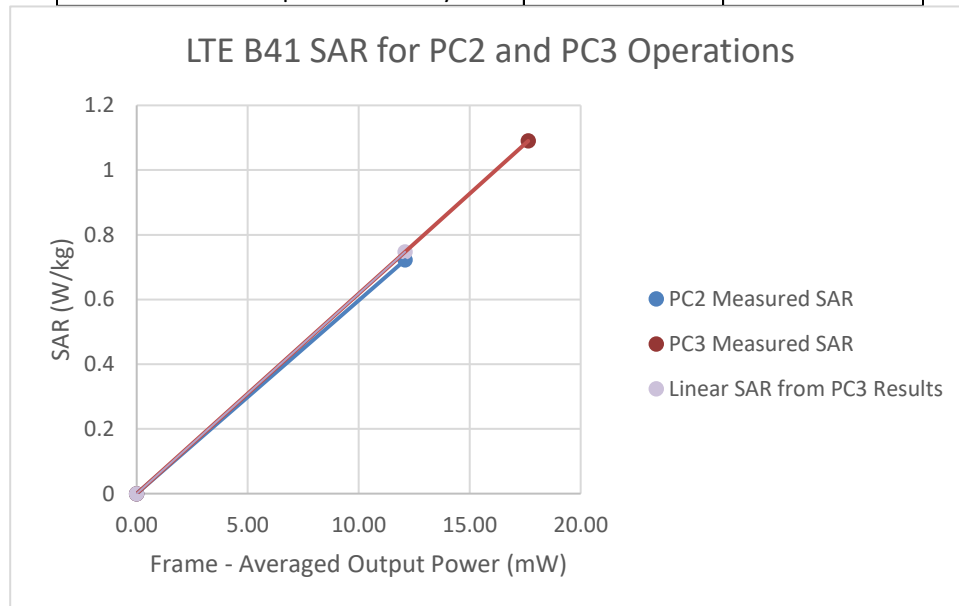

FCC ID: BCGA1934		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 229 of 234

14 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8753E5	S-Parameter Network Analyzer	9/14/2017	Annual	9/14/2018	US39170118
Agilent	8753E5	Network Analyzer	2/21/2018	Annual	2/21/2019	MY40001472
Agilent	E4438C	ESG Vector Signal Generator	6/22/2018	Annual	6/22/2019	MY53401181
Agilent	E5515C	Wireless Communications Test Set	2/28/2018	Biennial	2/28/2020	GB41450275
Agilent	N5182A	MXG Vector Signal Generator	6/15/2018	Annual	6/15/2019	MY47420837
Amplifier Research	150A100C	Amplifier	CBT	N/A	CBT	350132
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	343972
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	343971
Anritsu	MA24106A	USB Power Sensor	6/5/2018	Annual	6/5/2019	1248508
Anritsu	MA24106A	USB Power Sensor	1/19/2018	Annual	1/19/2019	1520503
Anritsu	MA24106A	USB Power Sensor	1/19/2018	Annual	1/19/2019	1520501
Anritsu	MA2411B	Pulse Power Sensor	11/15/2017	Annual	11/15/2018	1339007
Anritsu	ML2496A	Power Meter	10/9/2017	Annual	10/9/2018	1138001
Anritsu	MT8820C	Radio Communication Analyzer	6/27/2018	Annual	6/27/2019	6201240328
Control Company	4040	Digital Thermometer	4/7/2017	Biennial	4/7/2019	150286298
Control Company	4040	Digital Thermometer	2/28/2018	Biennial	2/28/2020	150761911
Control Company	4352	Ultra Long Stem Thermometer	2/14/2017	Biennial	2/14/2019	170112507
Control Company	4352	Ultra Long Stem Thermometer	5/2/2017	Biennial	5/2/2019	170330160
Control Company	4352	Ultra Long Stem Thermometer	5/2/2017	Biennial	5/2/2019	170330158
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
Mini-Circuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Mitutoyo	CD-6"CSX	Digital Caliper	4/18/2018	Biennial	4/18/2020	13264165
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	BW-S3W2	Attenuator (3dB)	CBT	N/A	CBT	120
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
Rohde & Schwarz	CMW500	Radio Communication Tester	7/5/2018	Annual	7/5/2019	106578
Rohde & Schwarz	CMW500	Radio Communication Tester	4/20/2018	Annual	4/20/2019	128635
Rohde & Schwarz	CMW500	Radio Communication Tester	7/5/2018	Annual	7/5/2019	145663
Rohde & Schwarz	FSP-7	Spectrum Analyzer	2/7/2018	Annual	2/7/2019	100288
SPEAG	D1750V2	1750 MHz SAR Dipole	9/7/2017	Biennial	9/7/2019	1104
SPEAG	D1900V2	1900 MHz SAR Dipole	9/7/2017	Biennial	9/7/2019	5d181
SPEAG	D2450V2	2450 MHz SAR Dipole	9/11/2017	Biennial	9/11/2019	921
SPEAG	D2450V2	2450 MHz SAR Dipole	5/16/2018	Annual	5/16/2019	945
SPEAG	D2600V2	2600 MHz SAR Dipole	9/11/2017	Biennial	9/11/2019	1069
SPEAG	D5GHzV2	SAR Dipole	9/13/2017	Annual	9/13/2018	1163
SPEAG	D750V3	750 MHz SAR Dipole	9/8/2017	Biennial	9/8/2019	1097
SPEAG	D750V3	750 MHz SAR Dipole	6/13/2017	Biennial	6/13/2019	1057
SPEAG	D2300V2	2300 MHz SAR Dipole	3/7/2018	Annual	3/7/2019	1038
SPEAG	D835V2	835 MHz SAR Dipole	5/18/2018	Annual	5/18/2019	4d180
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/8/2018	Annual	2/8/2019	1403
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/18/2018	Annual	6/18/2019	701
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/18/2018	Annual	1/18/2019	793
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/26/2018	Annual	1/26/2019	1532
SPEAG	DAE4	Dasy Data Acquisition Electronics	4/12/2018	Annual	4/12/2019	501
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/7/2018	Annual	3/7/2019	604
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/26/2018	Annual	1/26/2019	1533
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/15/2018	Annual	5/15/2019	1070
SPEAG	ES3DV3	SAR Probe	2/13/2018	Annual	2/13/2019	3329
SPEAG	ES3DV3	SAR Probe	4/12/2018	Annual	4/12/2019	3275
SPEAG	ES3DV3	SAR Probe	3/13/2018	Annual	3/13/2019	3131
SPEAG	EX3DV4	SAR Probe	7/20/2018	Annual	7/20/2019	7416
SPEAG	EX3DV4	SAR Probe	3/16/2018	Annual	3/16/2019	3837
SPEAG	EX3DV4	SAR Probe	1/26/2018	Annual	1/26/2019	7490
SPEAG	ES3DV3	SAR Probe	9/18/2017	Annual	9/18/2018	3287
SPEAG	ES3DV2	SAR Probe	1/12/2018	Annual	1/12/2019	3288
SPEAG	ES3DV2	SAR Probe	6/22/2018	Annual	6/22/2019	3022

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 230 of 234

15 MEASUREMENT UNCERTAINTIES

a	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System								
Probe Calibration	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	2.0	R	1.73	1.0	1.0	1.2	1.2	∞
Linearity	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	0.25	R	1.73	1.0	1.0	0.1	0.1	∞
Readout Electronics	0.3	N	1	1.0	1.0	0.3	0.3	∞
Response Time	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions - Noise	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
RF Ambient Conditions - Reflections	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	6.7	R	1.73	1.0	1.0	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Test Sample Related								
Test Sample Positioning	2.7	N	1	1.0	1.0	2.7	2.7	35
Device Holder Uncertainty	1.67	N	1	1.0	1.0	1.7	1.7	5
Output Power Variation - SAR drift measurement	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
SAR Scaling	0.0	R	1.73	1.0	1.0	0.0	0.0	∞
Phantom & Tissue Parameters								
Phantom Uncertainty (Shape & Thickness tolerances)	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	4.2	N	1	0.78	0.71	3.3	3.0	10
Liquid Permittivity - measurement uncertainty	4.1	N	1	0.23	0.26	1.0	1.1	10
Liquid Conductivity - Temperature Uncertainty	3.4	R	1.73	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	0.6	R	1.73	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Combined Standard Uncertainty (k=1)	RSS					11.5	11.3	60
Expanded Uncertainty (95% CONFIDENCE LEVEL)	k=2					23.0	22.6	

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 231 of 234

16 CONCLUSION

16.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 232 of 234

17 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 233 of 234

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz), July 2016.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: BCGA1934	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806220015-01-R2.BCG	Test Dates: 08/13/18-09/13/18	DUT Type: Tablet Device	Page 234 of 234

APPENDIX A: SAR TEST DATA

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA1934; Type: Tablet Device; Serial: DLXX700ZL3TG

Communication System: UID 0, GSM GPRS; 2 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 1 \text{ S/m}$; $\epsilon_r = 54.129$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 09-02-2018; Ambient Temp: 23.1°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7490; ConvF(10.3, 10.3, 10.3); Calibrated: 1/26/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1532; Calibrated: 1/26/2018

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1936

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: GPRS 850 Ant 3, Body SAR, Back side, Mid.ch, 2 Tx Slots


Area Scan (9x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 30.07 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 0.861 W/kg; SAR (10g) = 0.437 W/kg

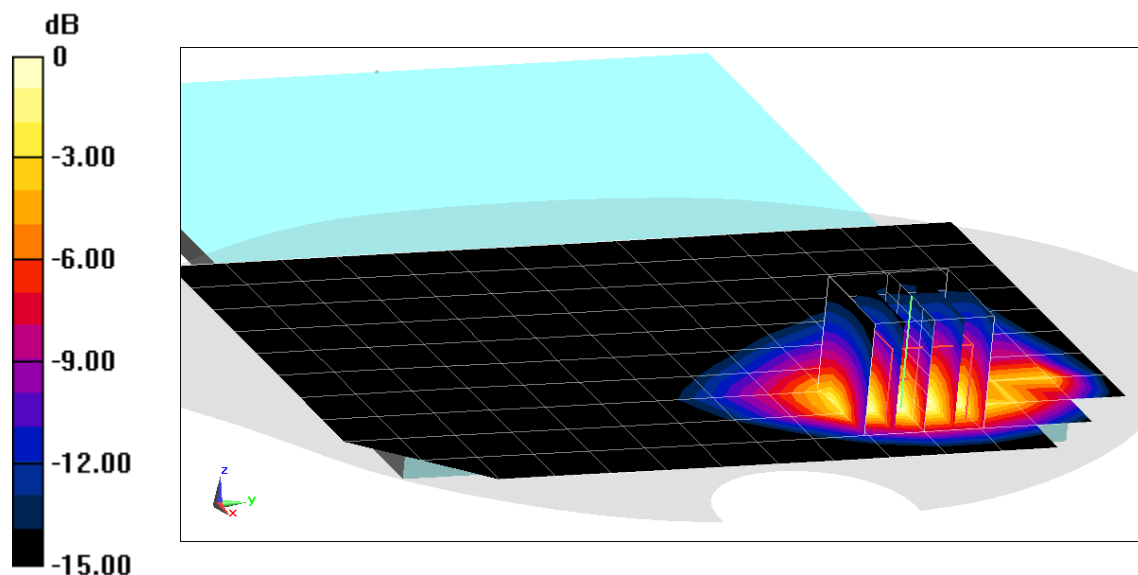

0 dB = 1.56 W/kg = 1.93 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA1934; Type: Tablet Device; Serial: DLXX700UL3TG

Communication System: UID 0, GSM GPRS; 2 Tx slots; Frequency: 1909.8 MHz; Duty Cycle: 1:4.15

Medium: 1900 Body Medium parameters used:

$f = 1910$ MHz; $\sigma = 1.588$ S/m; $\epsilon_r = 52.529$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 09-04-2018; Ambient Temp: 23.0°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3288; ConvF(4.83, 4.83, 4.83); Calibrated: 1/12/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn793; Calibrated: 1/18/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: GPRS 1900 Ant 4A, Body SAR, Back side, High.ch, 2 Tx Slots


Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.17 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.64 W/kg

SAR(1 g) = 0.926 W/kg; SAR(10g) = 0.43 W/kg

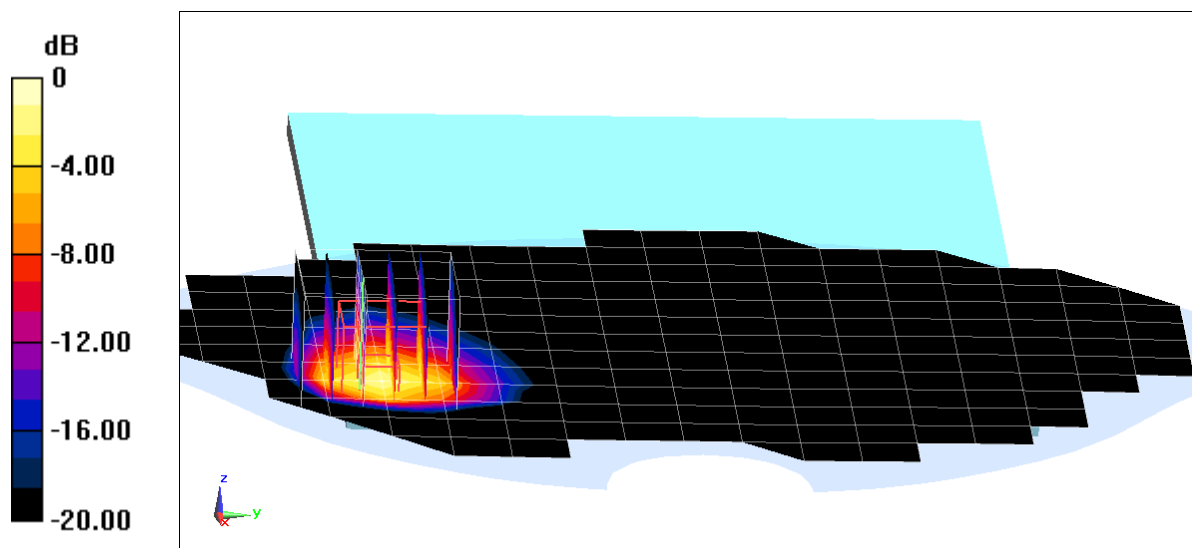

0 dB = 1.23 W/kg = 0.90 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA1934; Type: Tablet Device; Serial: DLXX7007L3TG

Communication System: UID 0, UMTS; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 826.4 \text{ MHz}$; $\sigma = 0.99 \text{ S/m}$; $\epsilon_r = 53.492$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 08-30-2018; Ambient Temp: 22.7°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7490; ConvF(10.3, 10.3, 10.3); Calibrated: 1/26/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1532; Calibrated: 1/26/2018

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1936

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 850 Ant 1, Body SAR, Left Edge, Low.ch


Area Scan (10x19x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.15 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 6.71 W/kg

SAR(1 g) = 1.09 W/kg; SAR(10g) = 0.364 W/kg

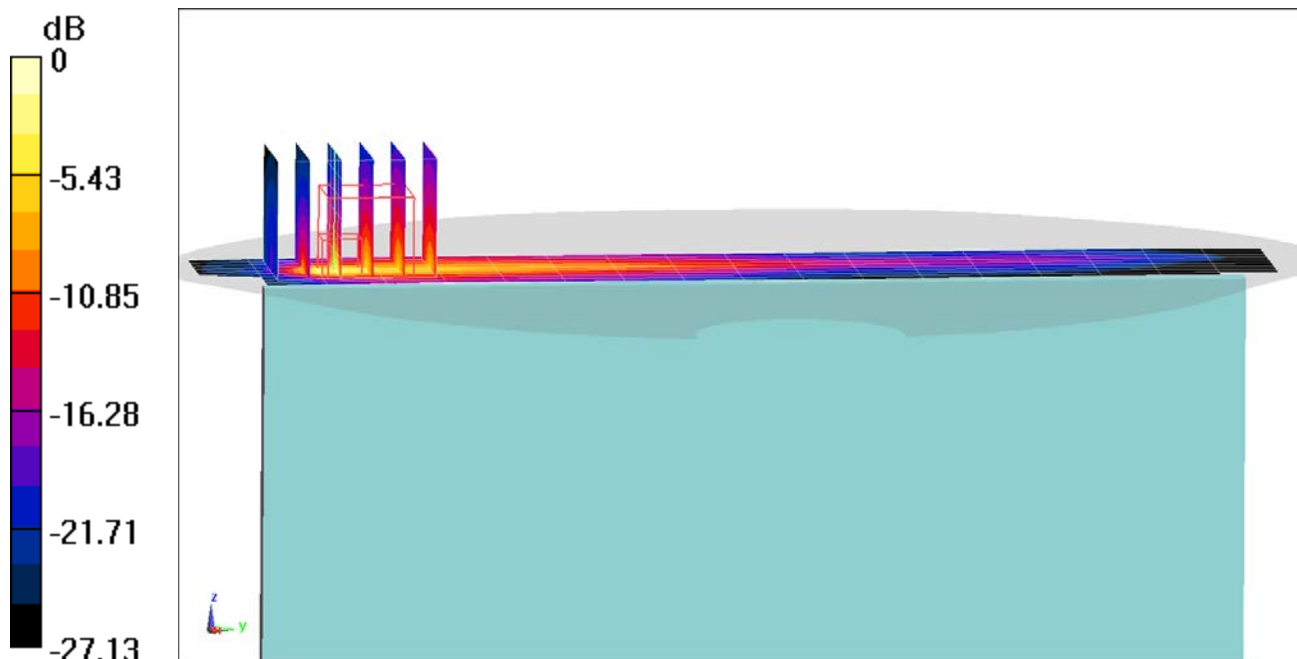

0 dB = 3.97 W/kg = 5.99 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA1934; Type: Tablet Device; Serial: DLXX7007L3TG

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1732.4 \text{ MHz}$; $\sigma = 1.482 \text{ S/m}$; $\epsilon_r = 52.992$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 09-03-2018; Ambient Temp: 21.7°C; Tissue Temp: 21.0°C

Probe: ES3DV3 - SN3287; ConvF(5.19, 5.19, 5.19); Calibrated: 9/18/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 1/26/2018

Phantom: Twin-SAM V8.0_Left; Type: QD 000 P41 AA; Serial: 1935

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 1750 Ant 2A, Body SAR, Back side, Mid.ch


Area Scan (11x17x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.13 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.15 W/kg

SAR(1 g) = 0.955 W/kg; SAR(10g) = 0.469 W/kg

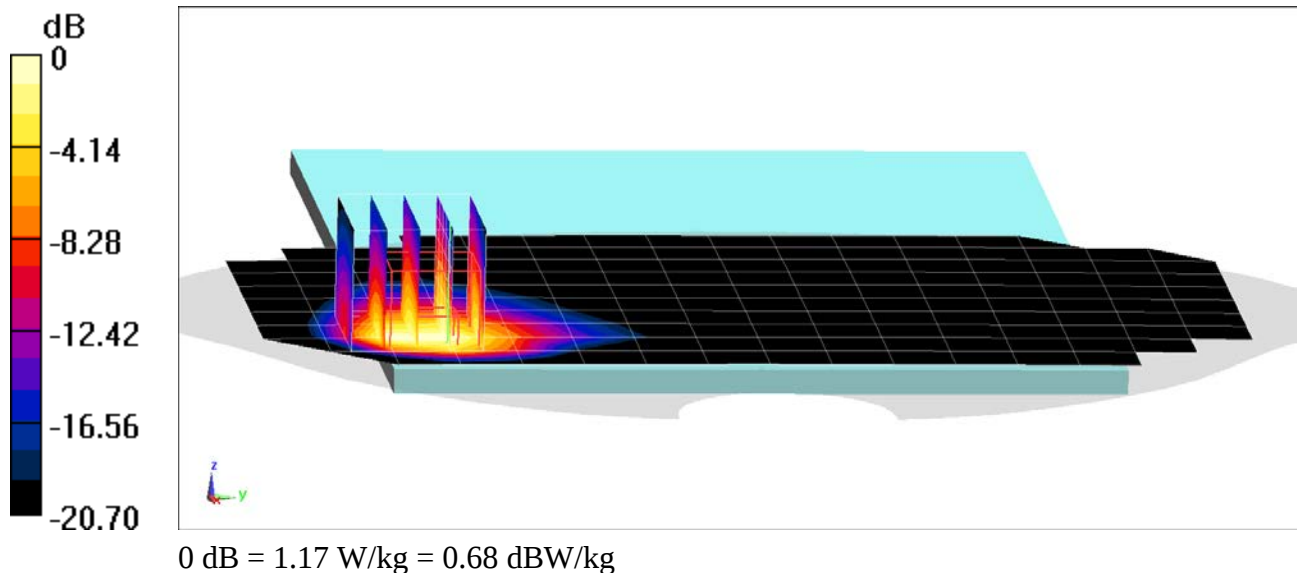

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA1934; Type: Tablet Device; Serial: DLXX700ZL3TG

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.557 \text{ S/m}$; $\epsilon_r = 50.951$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 09-03-2018; Ambient Temp: 23.0°C; Tissue Temp: 21.0°C

Probe: ES3DV3 - SN3131; ConvF(4.8, 4.8, 4.8); Calibrated: 3/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn604; Calibrated: 3/7/2018

Phantom: SAM Sub; Type: QD 000 P40 CC; Serial: 1375

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 1900 Ant 4A, Body SAR, Left Edge, Mid.ch


Area Scan (11x8x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.41 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.38 W/kg

SAR(1 g) = 0.920 W/kg; SAR(10g) = 0.376 W/kg

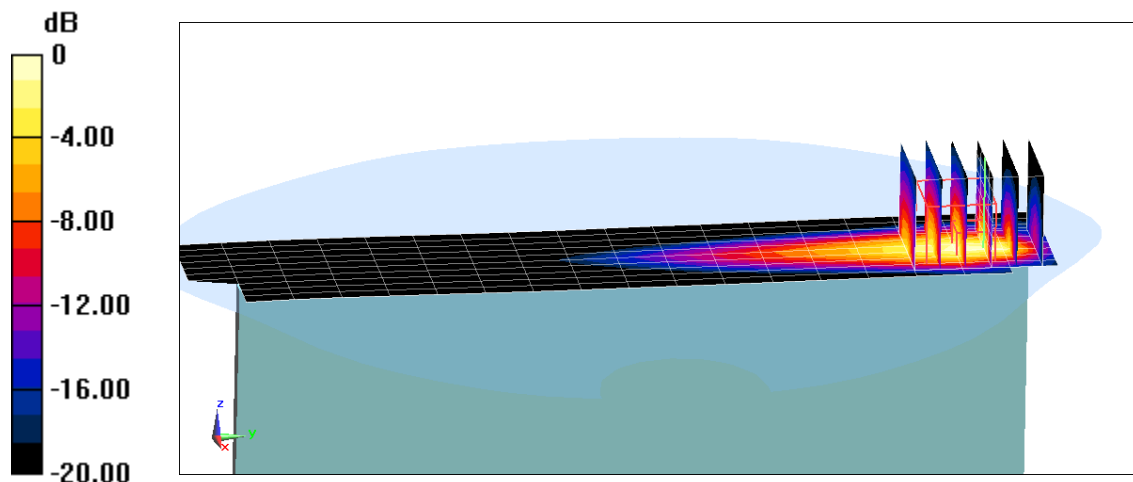

0 dB = 1.41 W/kg = 1.49 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA1934; Type: Tablet Device; Serial: DLXX700UL3TG

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$; $\sigma = 0.935 \text{ S/m}$; $\epsilon_r = 55.12$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date:09-03-2018; Ambient Temp: 22.7°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7416; ConvF(9.6, 9.6, 9.6); Calibrated: 7/20/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn793; Calibrated: 1/18/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 12 Ant 1, Body SAR, Left Edge, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**


Area Scan (10x7x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.08 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 9.90 W/kg

SAR(1 g) = 1.18 W/kg; SAR(10g) = 0.358 W/kg

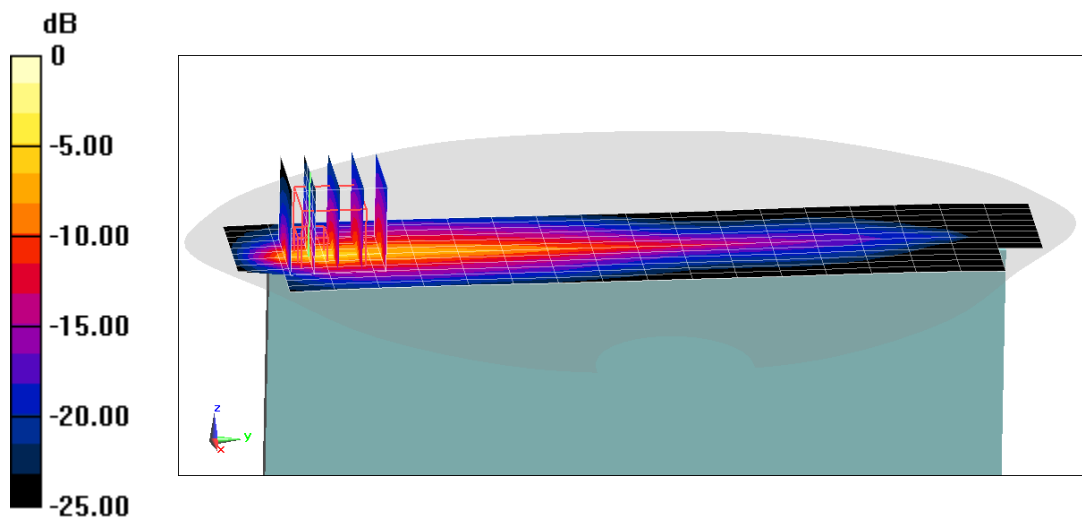

0 dB = 5.84 W/kg = 7.66 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA1934; Type: Tablet Device; Serial: DLXX402AKR4X

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.998 \text{ S/m}$; $\epsilon_r = 54.605$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 09-03-2018; Ambient Temp: 23.1°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7490; ConvF(10.66, 10.66, 10.66); Calibrated: 1/26/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1532; Calibrated: 1/26/2018

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1936

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 13 Ant 3, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset**


Area Scan (11x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 31.35 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 2.20 W/kg

SAR(1 g) = 0.981 W/kg; SAR(10g) = 0.502 W/kg

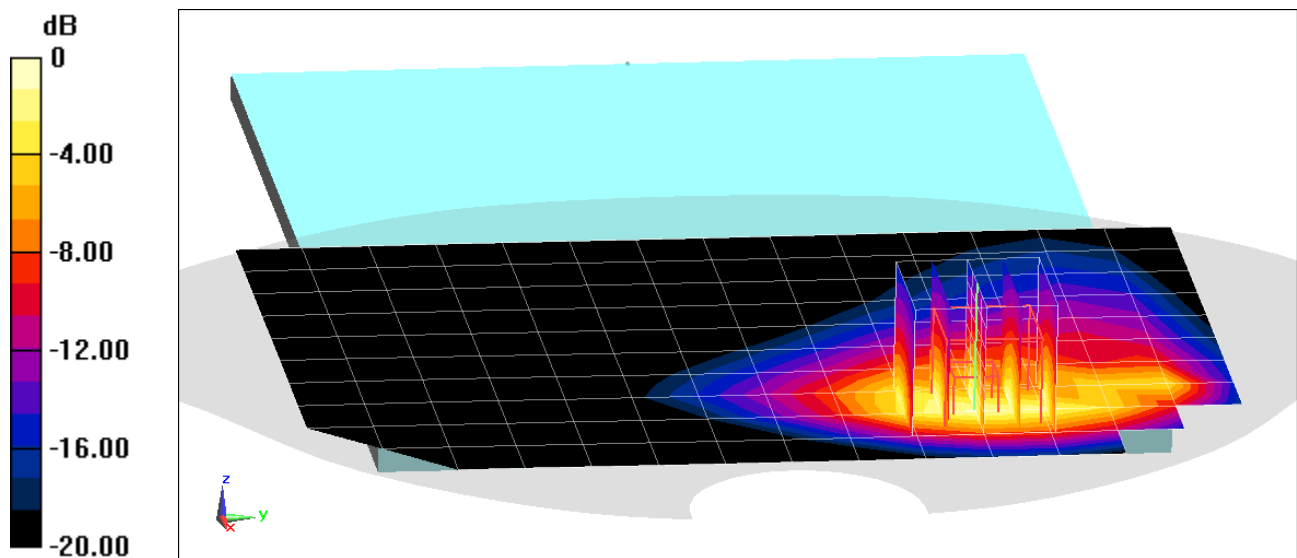

0 dB = 1.48 W/kg = 1.70 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA1934; Type: Tablet Device; Serial: DLXX402AKR4X

Communication System: UID 0, LTE Band 14; Frequency: 793 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 793 \text{ MHz}$; $\sigma = 1.008 \text{ S/m}$; $\epsilon_r = 54.493$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 09-03-2018; Ambient Temp: 23.1°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7490; ConvF(10.66, 10.66, 10.66); Calibrated: 1/26/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1532; Calibrated: 1/26/2018

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1936

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 14 Ant 1, Body SAR, Left Edge, Mid.ch,
10 MHz Bandwidth, QPSK, 25 RB, 0 RB Offset**


Area Scan (10x19x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.32 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 7.40 W/kg

SAR(1 g) = 0.981 W/kg; SAR(10g) = 0.305 W/kg

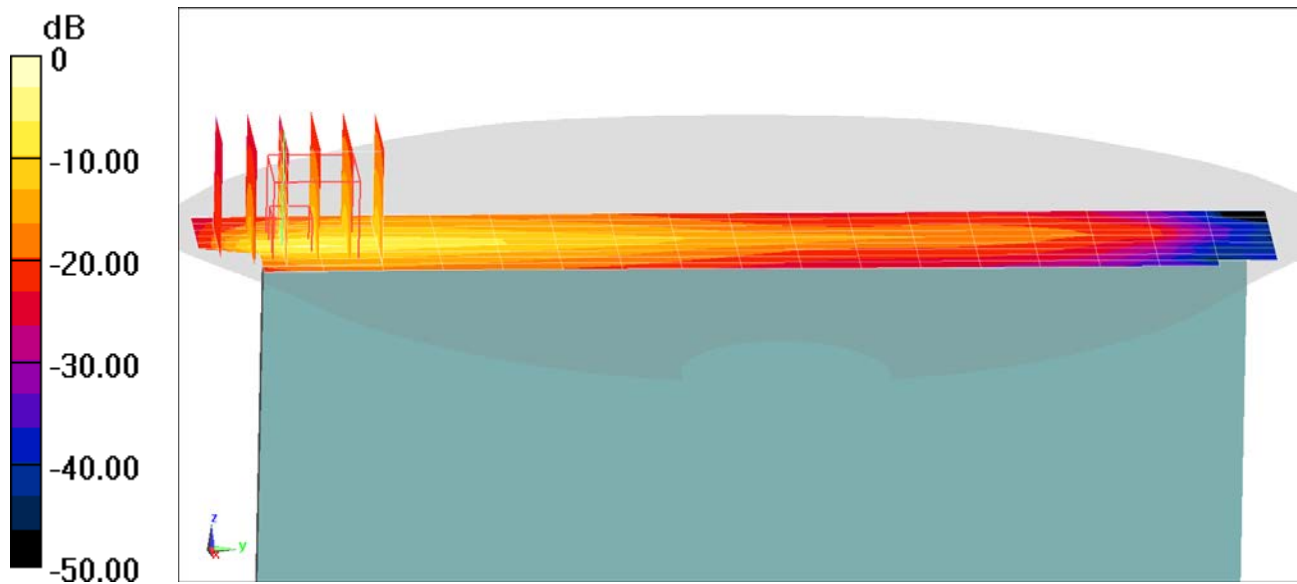

0 dB = 4.68 W/kg = 6.70 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA1934; Type: Tablet Device; Serial: DLXX700ZL3TG

Communication System: UID 0, LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.5$ MHz; $\sigma = 0.999$ S/m; $\epsilon_r = 53.393$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 08-30-2018; Ambient Temp: 22.7°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7490; ConvF(10.3, 10.3, 10.3); Calibrated: 1/26/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1532; Calibrated: 1/26/2018

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1936

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 5 (Cell.) Ant 1, Body SAR, Left Edge, Mid.ch,
10 MHz Bandwidth, QPSK, 25 RB, 0 RB Offset**


Area Scan (11x19x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.51 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 6.93 W/kg

SAR(1 g) = 1.17 W/kg; SAR(10g) = 0.413 W/kg

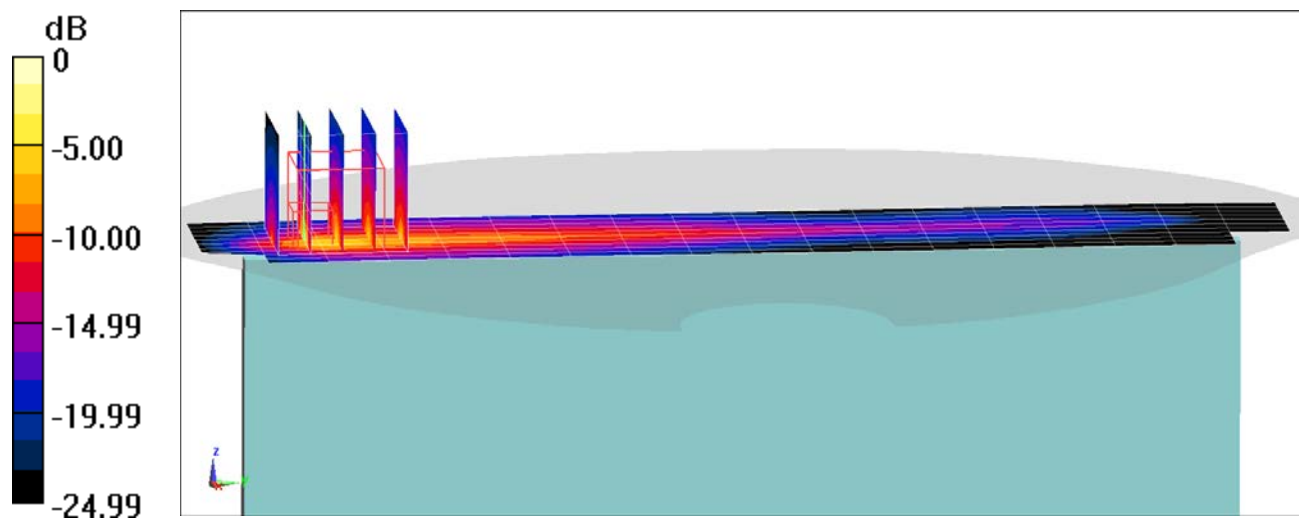

0 dB = 4.56 W/kg = 6.59 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA1934; Type: Tablet Device; Serial: DLXX7007L3TG

Communication System: UID 0, LTE Band 26; Frequency: 819 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 819 \text{ MHz}$; $\sigma = 0.969 \text{ S/m}$; $\epsilon_r = 53.286$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 08-27-2018; Ambient Temp: 21.9°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7490; ConvF(10.3, 10.3, 10.3); Calibrated: 1/26/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1532; Calibrated: 1/26/2018

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1936

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 26 (Cell.) Ant 3, Body SAR, Right Edge, Low.ch,
10 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset**


Area Scan (11x19x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 30.79 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 6.95 W/kg

SAR(1 g) = 1.15 W/kg; SAR(10g) = 0.417 W/kg

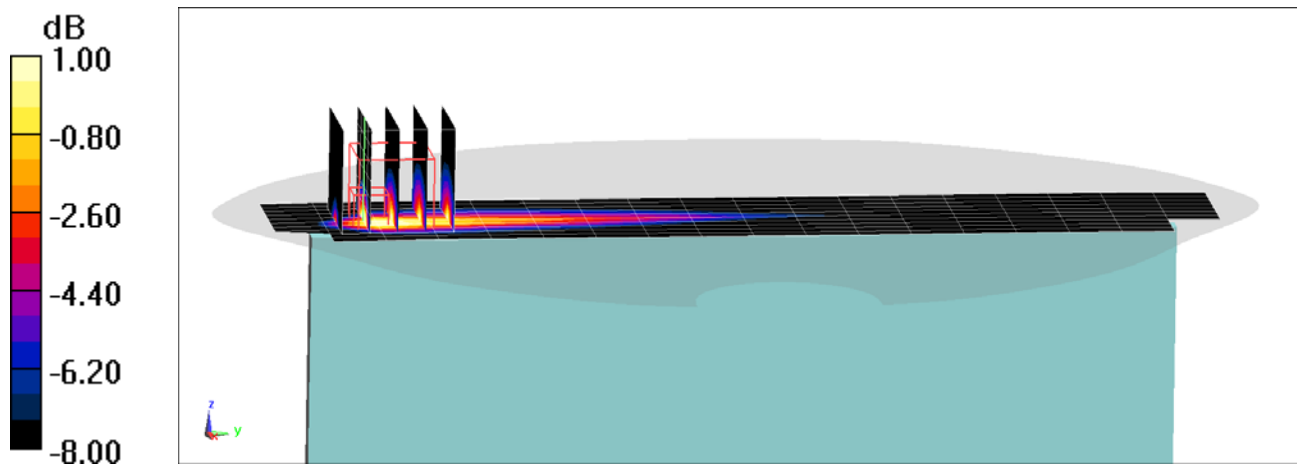

0 dB = 1.00 W/kg = 0.00 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA1934; Type: Tablet Device; Serial: DLXX700UL3TG

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1770 \text{ MHz}$; $\sigma = 1.501 \text{ S/m}$; $\epsilon_r = 51.686$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 08-31-2018; Ambient Temp: 21.5°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3287; ConvF(5.19, 5.19, 5.19); Calibrated: 9/18/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 1/26/2018

Phantom: Twin-SAM V8.0_Left; Type: QD 000 P41 AA; Serial: 1935

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 66 (AWS) Ant 2A, Body SAR, Back side, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (11x17x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.15 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.70 W/kg

SAR(1 g) = 1.13 W/kg; SAR(10g) = 0.545 W/kg

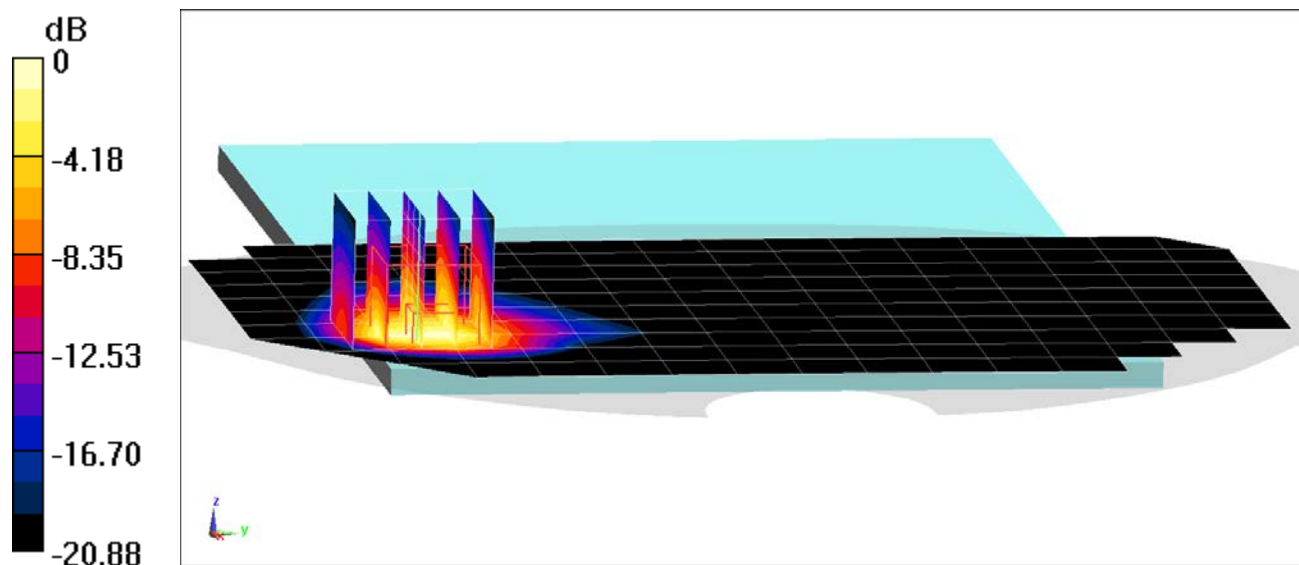

0 dB = 1.47 W/kg = 1.67 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA1934; Type: Tablet Device; Serial: DLXX700UL3TG

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1860 \text{ MHz}$; $\sigma = 1.543 \text{ S/m}$; $\epsilon_r = 52.658$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 09-04-2018; Ambient Temp: 23.0°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3288; ConvF(4.83, 4.83, 4.83); Calibrated: 1/12/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn793; Calibrated: 1/18/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 25 (PCS) Ant 2A, Body SAR, Back side, Low.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (8x7x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.40 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.44 W/kg

SAR(1 g) = 0.991 W/kg; SAR(10g) = 0.472 W/kg

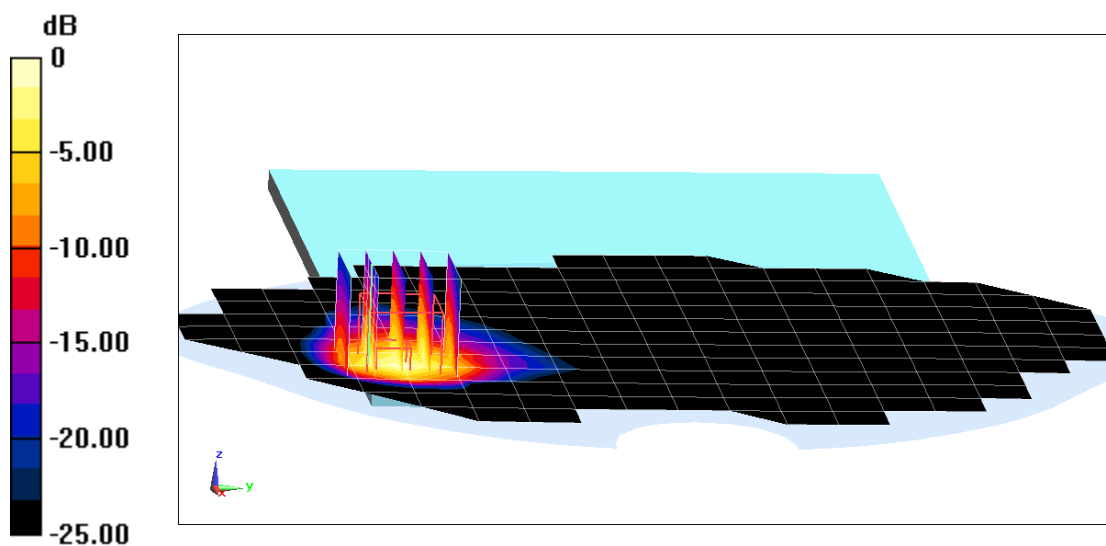

0 dB = 1.28 W/kg = 1.07 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA1934; Type: Tablet Device; Serial: DLXX402AKR4X

Communication System: UID 0, LTE Band 30; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: 2300 Body Medium parameters used:

$f = 2310 \text{ MHz}$; $\sigma = 1.883 \text{ S/m}$; $\epsilon_r = 51.313$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 09-03-2018; Ambient Temp: 22.1°C; Tissue Temp: 22.5°C

Probe: ES3DV2 - SN3022; ConvF(4.36, 4.36, 4.36); Calibrated: 6/22/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn701; Calibrated: 6/18/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CA; Serial: 1275

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 30 Ant 2B, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 49 RB Offset**


Area Scan (9x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.30 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 3.07 W/kg

SAR(1 g) = 0.975 W/kg; SAR(10g) = 0.358 W/kg

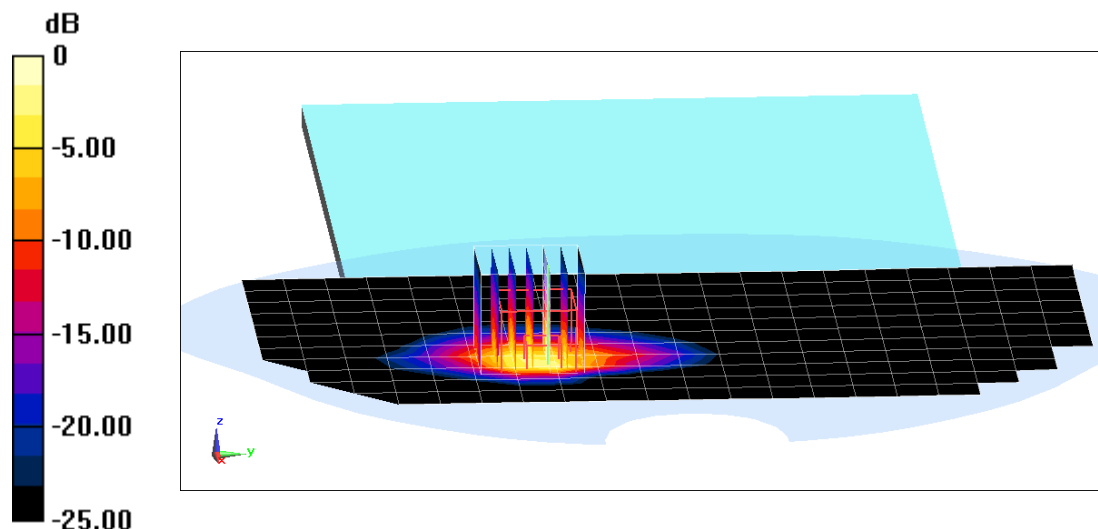

0 dB = 1.37 W/kg = 1.37 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA1934; Type: Tablet Device; Serial: DLXX700FL3TG

Communication System: UID 0, LTE Band 7; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: 2450-2600 Body Medium parameters used (interpolated):

$f = 2535 \text{ MHz}$; $\sigma = 2.063 \text{ S/m}$; $\epsilon_r = 51.045$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 09-13-2018; Ambient Temp: 23.0°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3329; ConvF(4.25, 4.25, 4.25); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1403; Calibrated: 2/8/2018

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: LTE Band 7 Ant 2B, 2CC Uplink, Body SAR, Back side, Mid.ch, 20 MHz Bandwidth

PCC: QPSK, Ch. 21100, 1 RB, 0 RB Offset

SCC: QPSK, Ch. 20902, 1 RB, 99 RB Offset


Area Scan (9x11x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.63 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 4.05 W/kg

SAR(1 g) = 1.13 W/kg; SAR(10g) = 0.395 W/kg

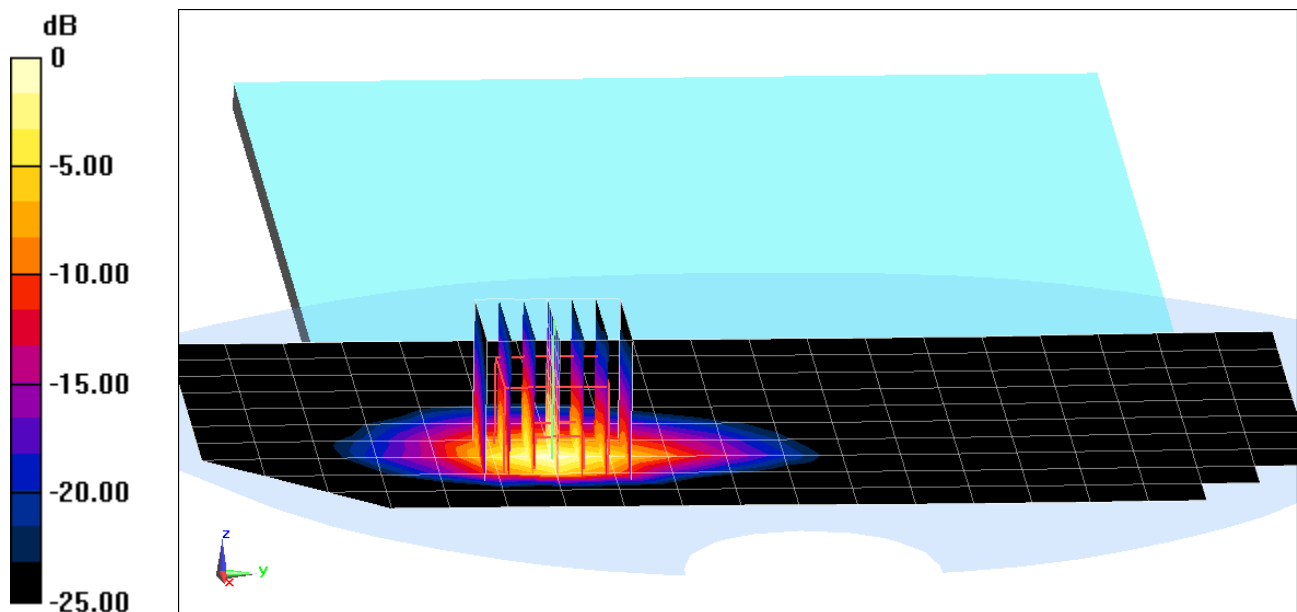

0 dB = 1.64 W/kg = 2.15 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA1934; Type: Tablet Device; Serial: DLXX700FL3TG

Communication System: UID 0, LTE Band 41 (Class 3); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium: 2450-2600 Body Medium parameters used (interpolated):

$f = 2593 \text{ MHz}$; $\sigma = 2.14 \text{ S/m}$; $\epsilon_r = 50.854$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 09-13-2018; Ambient Temp: 23.0°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3329; ConvF(4.25, 4.25, 4.25); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1403; Calibrated: 2/8/2018

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: LTE Band 41 Ant 2A, Body SAR, Back side, Mid.ch, 20 MHz Bandwidth

SCC: QPSK, Ch.40620, 50 RB, 0 RB Offset

PCC: QPSK, Ch.40422, 50 RB, 50 RB Offset


Area Scan (9x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.54 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 3.98 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10g) = 0.455 W/kg

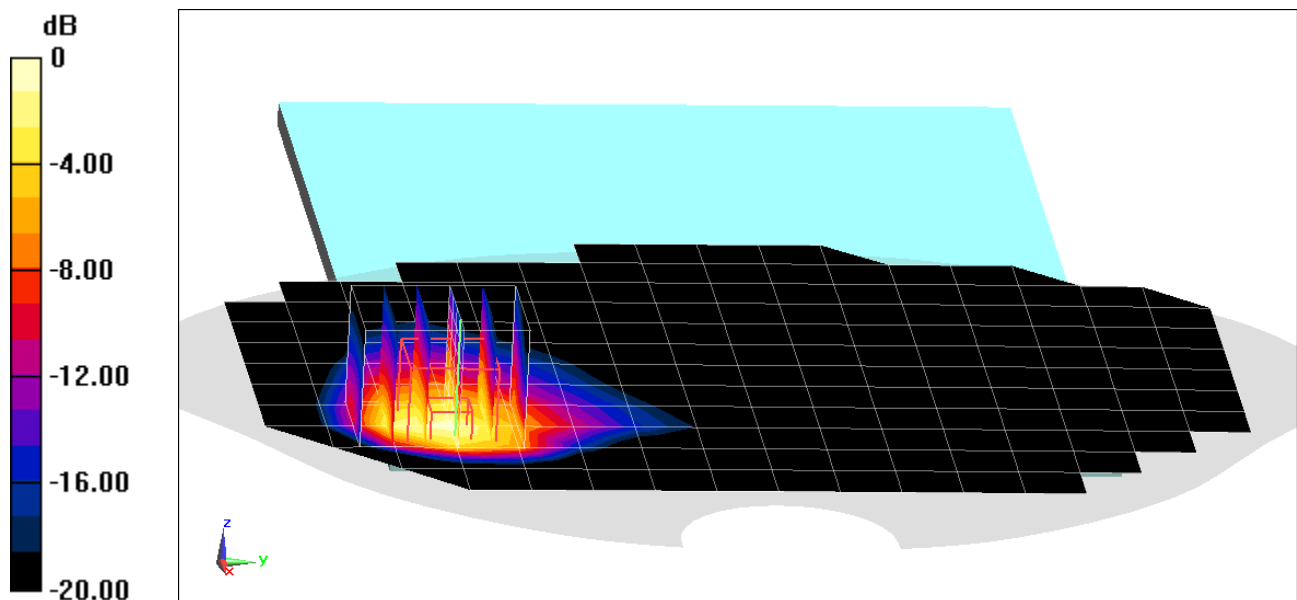

0 dB = 1.78 W/kg = 2.50 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA1934; Type: Tablet Device; Serial: DLXX400FKR4V

Communication System: UID 0, IEEE 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2412 \text{ MHz}$; $\sigma = 1.99 \text{ S/m}$; $\epsilon_r = 51.547$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 08-13-2018; Ambient Temp: 21.8°C; Tissue Temp: 21.6°C

Probe: ES3DV3 - SN3275; ConvF(4.57, 4.57, 4.57); Calibrated: 4/12/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn501; Calibrated: 4/12/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CD; Serial: 1736

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11b Ant 2A Variant 1, 22 MHz Bandwidth, Body SAR,
Ch 1, 1 Mbps, Back Side**


Area Scan (9x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.76 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 3.34 W/kg

SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.496 W/kg

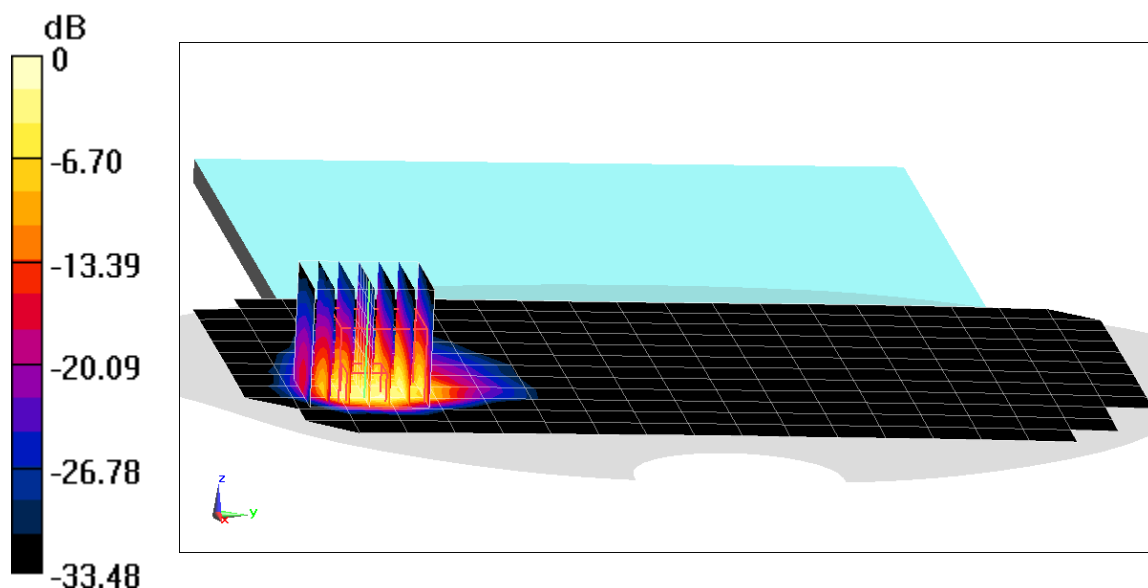

0 dB = 1.49 W/kg = 1.73 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA1934; Type: Tablet Device; Serial: DLXX3059KR4Q

Communication System: UID 0, IEEE 802.11n; Frequency: 5270 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used (interpolated):

$f = 5270 \text{ MHz}$; $\sigma = 5.559 \text{ S/m}$; $\epsilon_r = 48.16$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date:08-13-2018; Ambient Temp: 23.3°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN3837; ConvF(4.84, 4.84, 4.84); Calibrated: 3/16/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn604; Calibrated: 3/7/2018

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11n Ant 5 Variant 2, U-NII-2A, 40 MHz Bandwidth,
Body SAR, Ch 54, 13.5 Mbps, Right Edge**


Area Scan (11x27x1): Measurement grid: dx=5mm, dy=10mm

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 14.18 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 6.43 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.257 W/kg

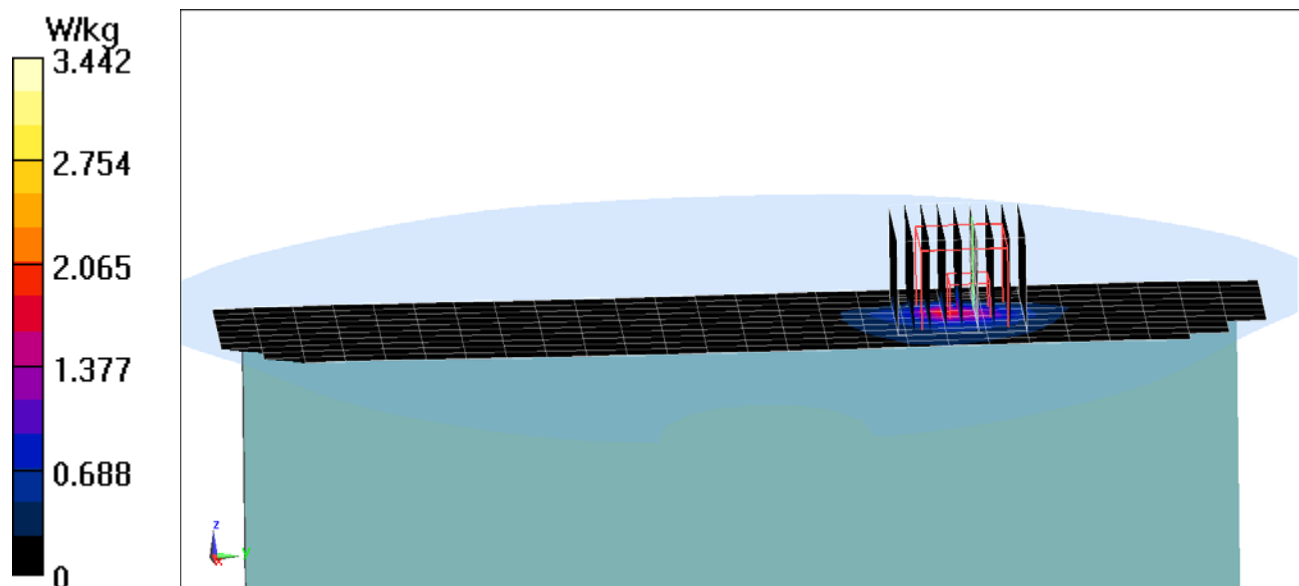

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA1934; Type: Tablet Device; Serial: DLXX300AKR4W

Communication System: UID 0, Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1.034

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2402 \text{ MHz}$; $\sigma = 1.979 \text{ S/m}$; $\epsilon_r = 51.428$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 08-29-2018; Ambient Temp: 22.1°C; Tissue Temp: 21.6°C

Probe: ES3DV3 - SN3275; ConvF(4.57, 4.57, 4.57); Calibrated: 4/12/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn501; Calibrated: 4/12/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CD; Serial: 1736

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: Bluetooth Ant 2A Variant 1, Body SAR, Ch 0, 1 Mbps, Back Side


Area Scan (11x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (8x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 23.41 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 3.18 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.456 W/kg

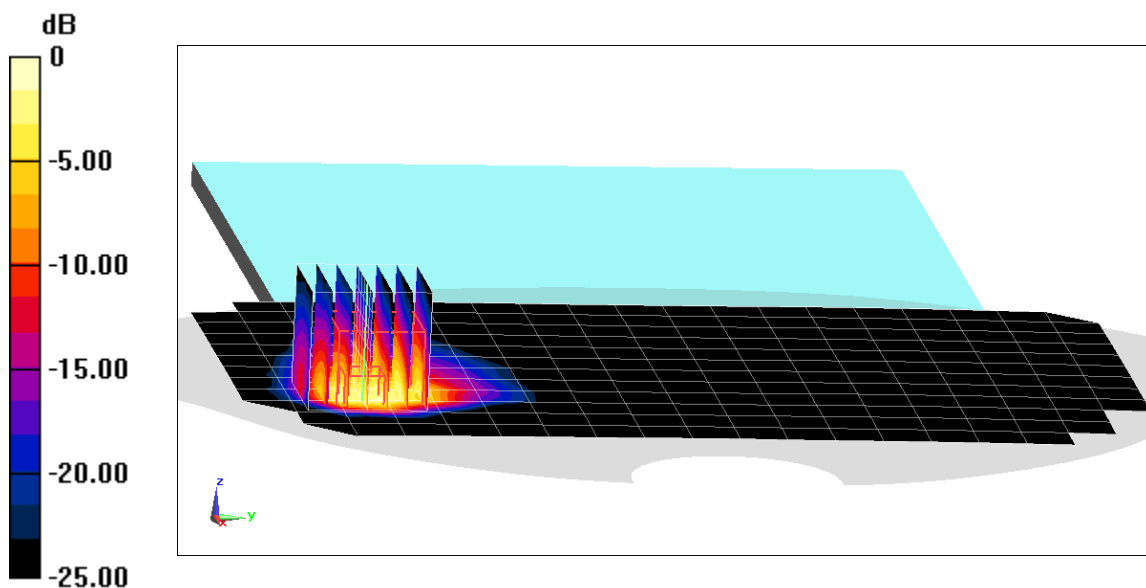

0 dB = 1.64 W/kg = 2.15 dBW/kg

APPENDIX B: SYSTEM VERIFICATION

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1097

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.972 \text{ S/m}$; $\epsilon_r = 54.71$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date:09-03-2018; Ambient Temp: 22.7°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7416; ConvF(9.6, 9.6, 9.6); Calibrated: 7/20/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn793; Calibrated: 1/18/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.76 W/kg

SAR(1 g) = 1.78 W/kg; SAR(10 g) = 1.17 W/kg

Deviation(1 g) = 3.97%

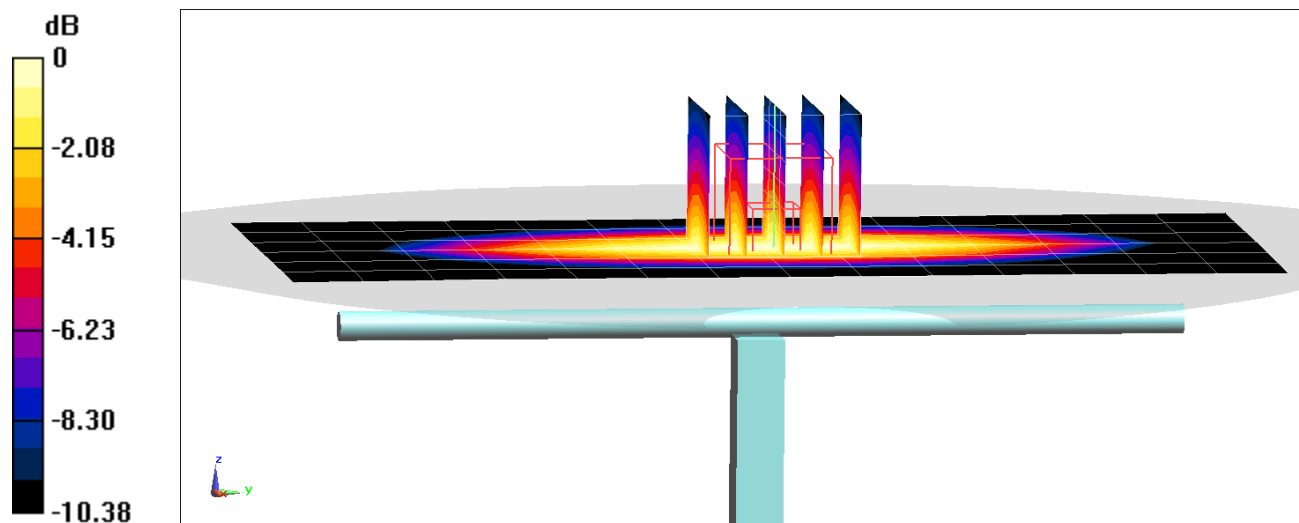

0 dB = 2.42 W/kg = 3.84 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1057

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.965 \text{ S/m}$; $\epsilon_r = 54.949$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09-03-2018; Ambient Temp: 23.1°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7490; ConvF(10.66, 10.66, 10.66); Calibrated: 1/26/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1532; Calibrated: 1/26/2018

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1936

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.50 W/kg

SAR(1 g) = 1.66 W/kg; SAR(10 g) = 1.1 W/kg

Deviation(1 g) = -5.57%

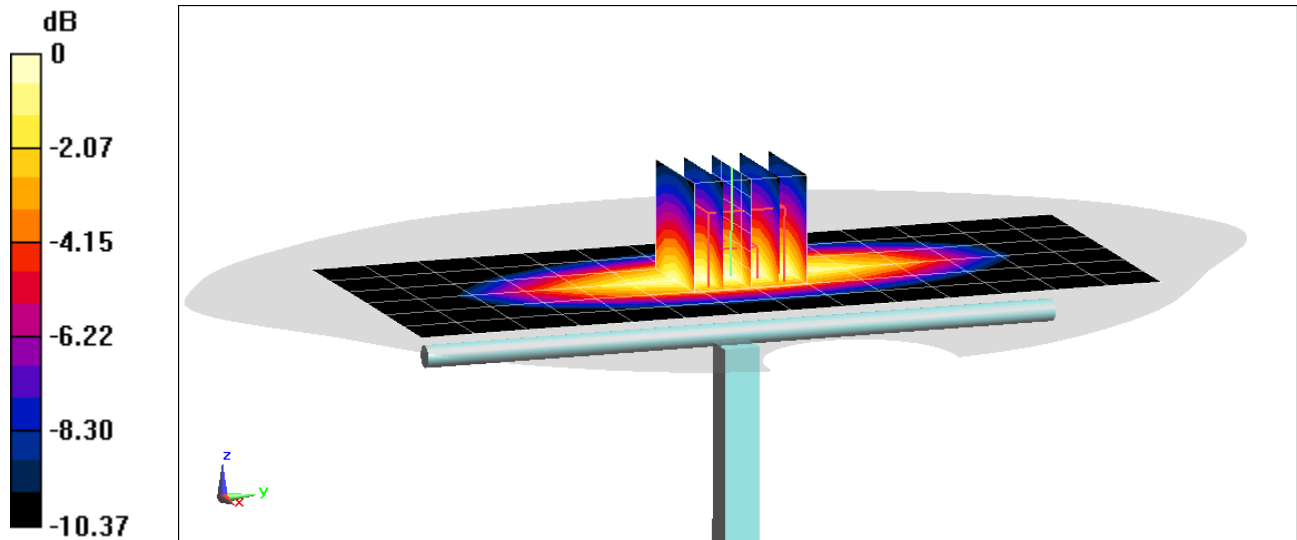

0 dB = 2.21 W/kg = 3.44 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d180

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.984 \text{ S/m}$; $\epsilon_r = 53.125$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 08-27-2018; Ambient Temp: 21.9°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7490; ConvF(10.3, 10.3, 10.3); Calibrated: 1/26/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1532; Calibrated: 1/26/2018

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1936

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 3.15 W/kg

SAR(1 g) = 2.06 W/kg; SAR(10 g) = 1.35 W/kg

Deviation(1 g) = 7.40%

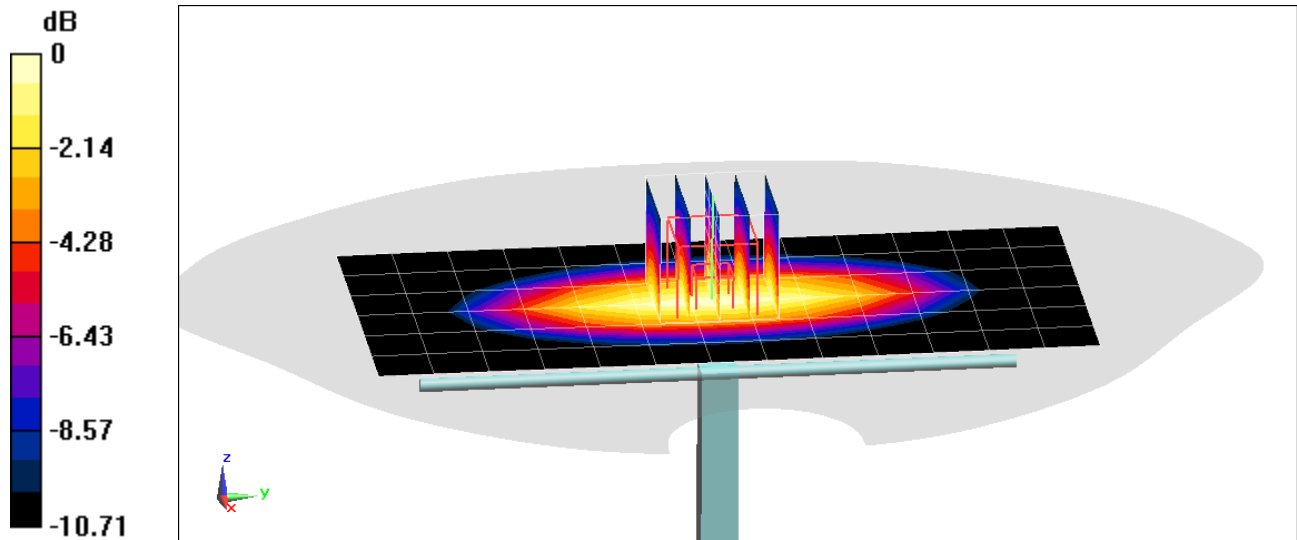

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d180

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.997 \text{ S/m}$; $\epsilon_r = 53.399$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 08-30-2018; Ambient Temp: 22.7°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7490; ConvF(10.3, 10.3, 10.3); Calibrated: 1/26/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1532; Calibrated: 1/26/2018

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1936

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.92 W/kg

SAR(1 g) = 1.94 W/kg; SAR(10 g) = 1.27 W/kg

Deviation(1 g) = 1.15%

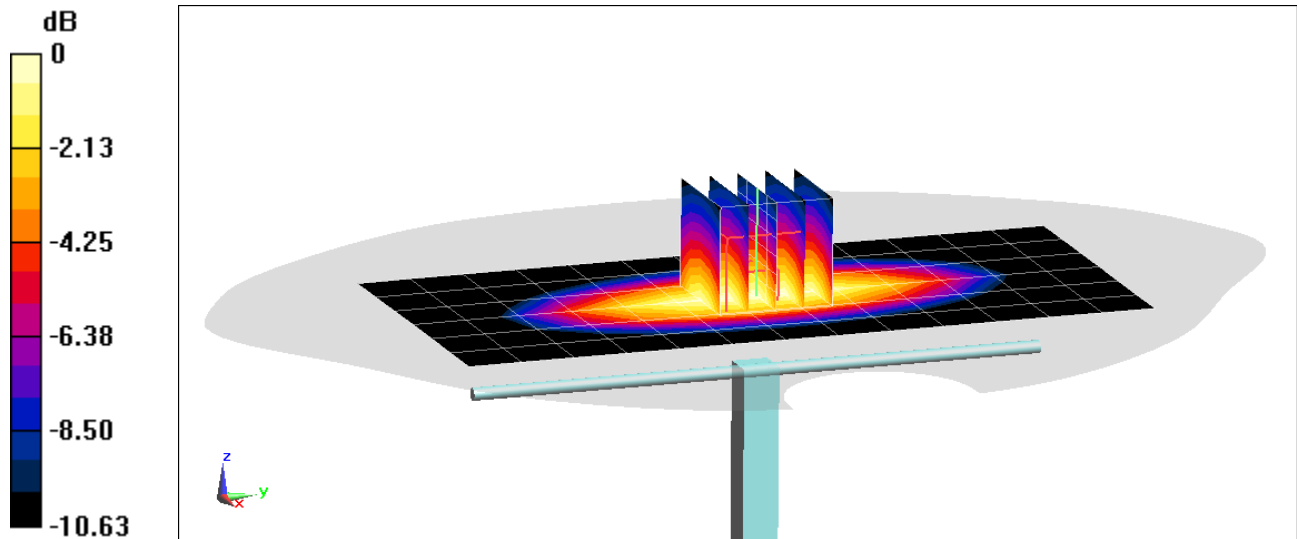

0 dB = 2.59 W/kg = 4.13 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d180

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.998 \text{ S/m}$; $\epsilon_r = 54.145$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09-02-2018; Ambient Temp: 23.1°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7490; ConvF(10.3, 10.3, 10.3); Calibrated: 1/26/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1532; Calibrated: 1/26/2018

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1936

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.87 W/kg

SAR(1 g) = 1.91 W/kg; SAR(10 g) = 1.25 W/kg

Deviation(1 g) = -0.42%

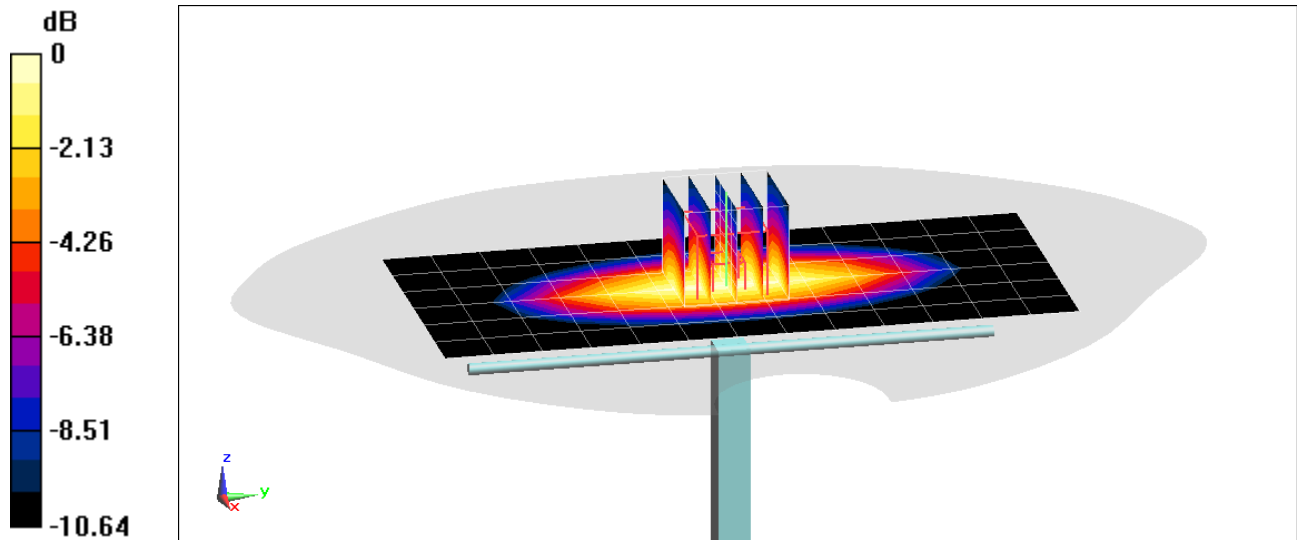

0 dB = 2.55 W/kg = 4.07 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1104

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.487 \text{ S/m}$; $\epsilon_r = 51.718$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08-31-2018; Ambient Temp: 21.5°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3287; ConvF(5.19, 5.19, 5.19); Calibrated: 9/18/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 1/26/2018

Phantom: Twin-SAM V8.0_Left; Type: QD 000 P41 AA; Serial: 1935

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.51 W/kg

SAR(1 g) = 3.74 W/kg; SAR(10 g) = 2.00 W/kg

Deviation(1 g) = 2.19%

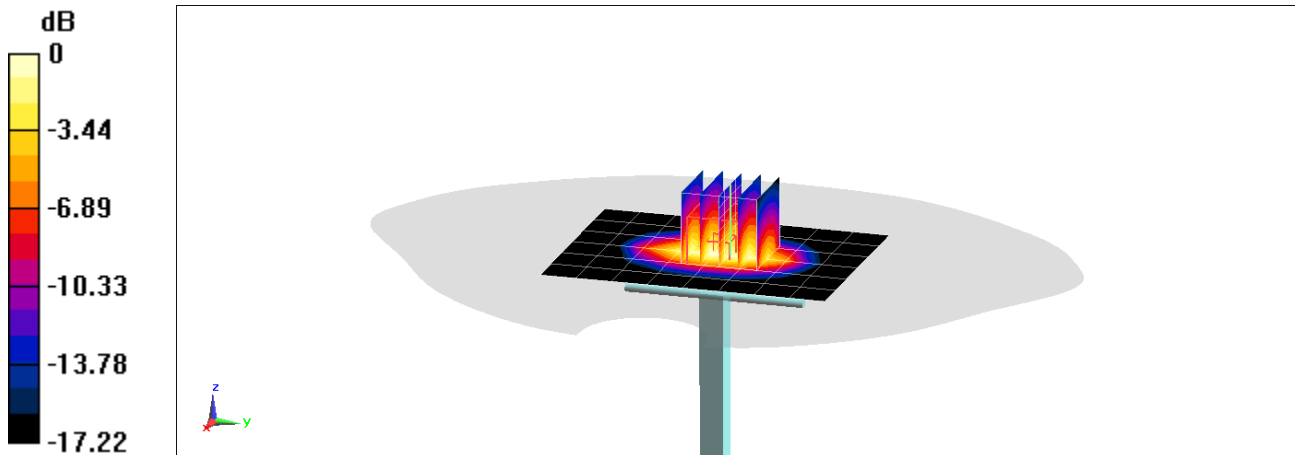

0 dB = 4.60 W/kg = 6.63 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1104

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.494 \text{ S/m}$; $\epsilon_r = 52.974$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-03-2018; Ambient Temp: 21.7°C; Tissue Temp: 21.0°C

Probe: ES3DV3 - SN3287; ConvF(5.19, 5.19, 5.19); Calibrated: 9/18/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 1/26/2018

Phantom: Twin-SAM V8.0_Left; Type: QD 000 P41 AA; Serial: 1935

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

1750 MHz System Verification at 20.0 dBm (100 mW)



Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.66 W/kg

SAR(1 g) = 3.84 W/kg; SAR(10 g) = 2.07 W/kg

Deviation(1 g) = 4.92%

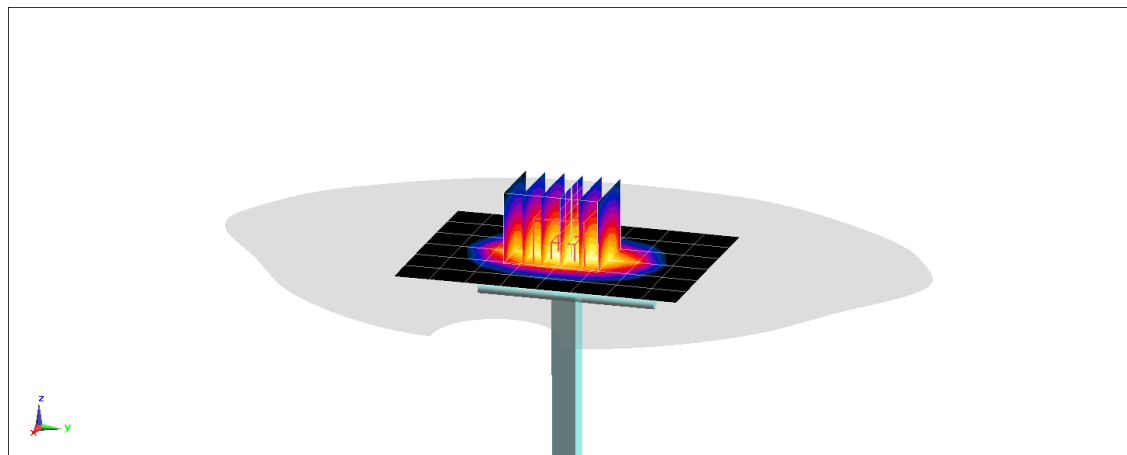

0 dB = 4.80 W/kg = 6.81 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d181

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.575 \text{ S/m}$; $\epsilon_r = 50.889$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-03-2018; Ambient Temp: 23.0°C; Tissue Temp: 21.0°C

Probe: ES3DV3 - SN3131; ConvF(4.8, 4.8, 4.8); Calibrated: 3/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn604; Calibrated: 3/7/2018

Phantom: SAM Sub; Type: QD 000 P40 CC; Serial: 1375

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

1900 MHz System Verification at 20.0 dBm (100 mW)



Area Scan (7x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.49 W/kg

SAR(1 g) = 4.17 W/kg; SAR(10 g) = 2.15 W/kg

Deviation(1 g) = 5.57%

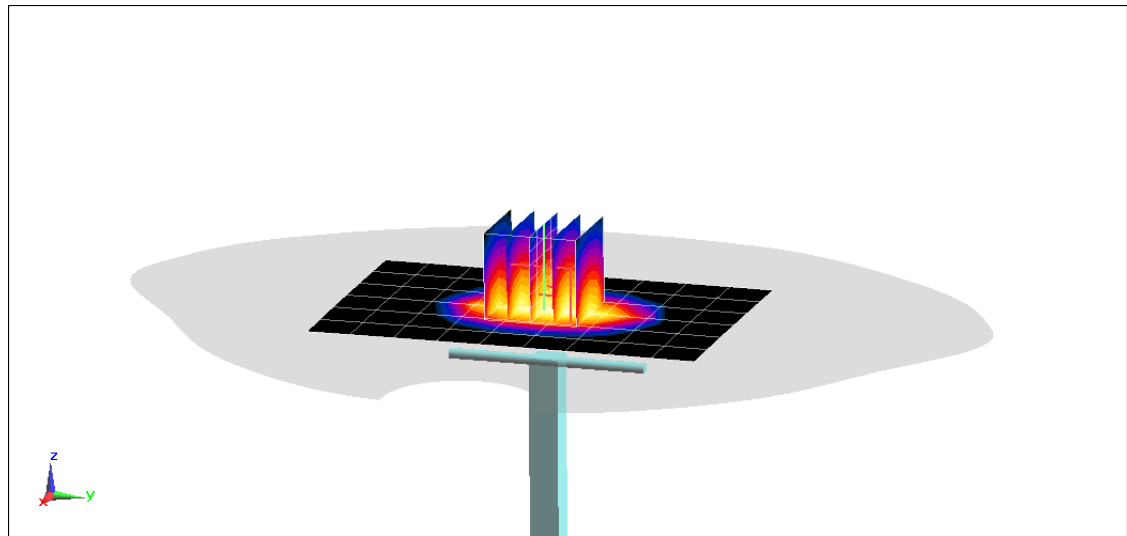

0 dB = 5.28 W/kg = 7.23 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d181

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.579 \text{ S/m}$; $\epsilon_r = 52.56$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-04-2018; Ambient Temp: 23.0°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3288; ConvF(4.83, 4.83, 4.83); Calibrated: 1/12/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn793; Calibrated: 1/18/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.74 W/kg

SAR(1 g) = 4.23 W/kg; SAR(10 g) = 2.17 W/kg

Deviation(1 g) = 7.09%

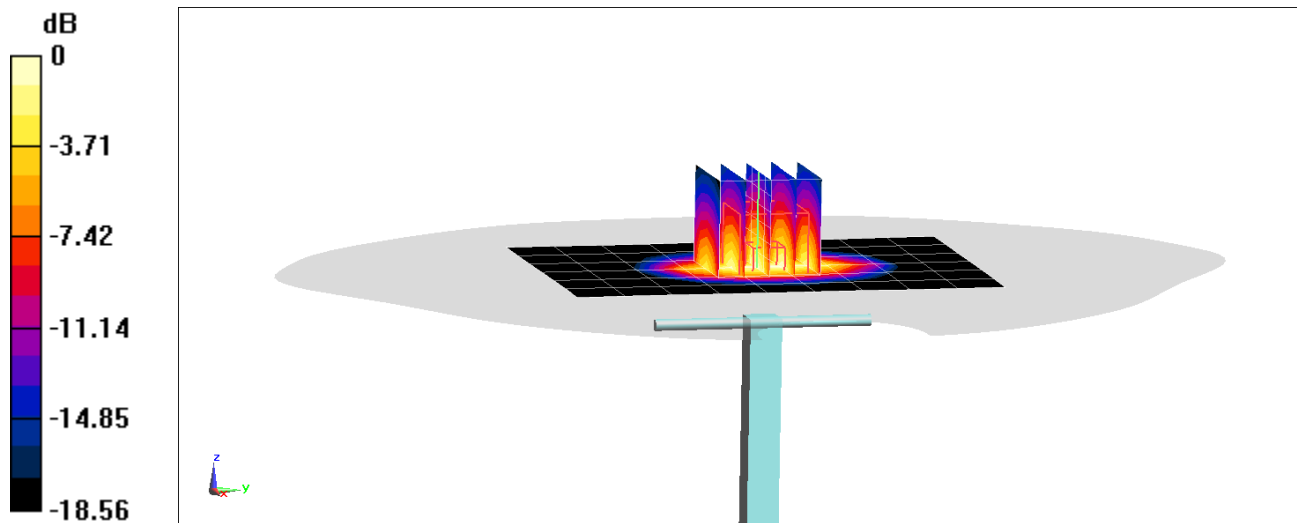

0 dB = 5.33 W/kg = 7.27 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2300 MHz; Type: D2300V3; Serial: 1038

Communication System: UID 0, CW; Frequency: 2300 MHz; Duty Cycle: 1:1

Medium: 2300 Body Medium parameters used:

$f = 2300 \text{ MHz}$; $\sigma = 1.872 \text{ S/m}$; $\epsilon_r = 51.339$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-03-2018; Ambient Temp: 22.1°C; Tissue Temp: 22.5°C

Probe: ES3DV2 - SN3022; ConvF(4.36, 4.36, 4.36); Calibrated: 6/22/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn701; Calibrated: 6/18/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CA; Serial: 1275

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

2300 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 9.73 W/kg

SAR(1 g) = 4.91 W/kg; SAR(10 g) = 2.36 W/kg

Deviation(1 g) = 5.14%

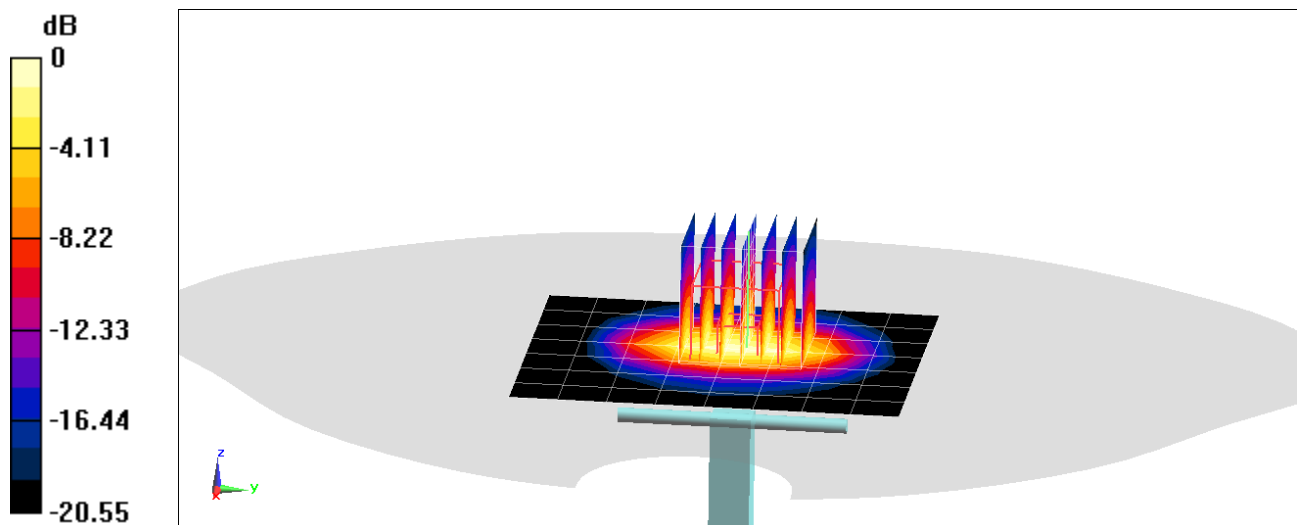

0 dB = 6.39 W/kg = 8.06 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 945

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 2.042 \text{ S/m}$; $\epsilon_r = 51.408$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08-13-2018; Ambient Temp: 21.8°C; Tissue Temp: 21.6°C

Probe: ES3DV3 - SN3275; ConvF(4.57, 4.57, 4.57); Calibrated: 4/12/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn501; Calibrated: 4/12/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CD; Serial: 1736

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 10.8 W/kg

SAR(1 g) = 5.36 W/kg; SAR(10 g) = 2.48 W/kg

Deviation(1 g) = 8.50%

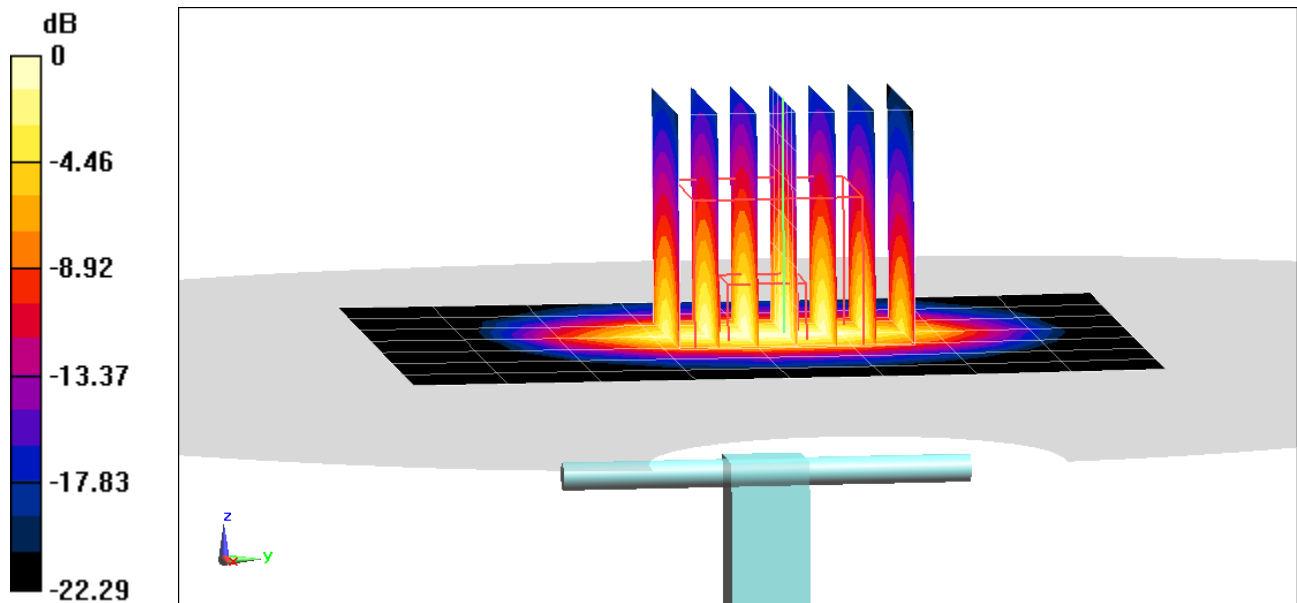

0 dB = 7.00 W/kg = 8.45 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 945

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 2.045 \text{ S/m}$; $\epsilon_r = 51.225$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08-29-2018; Ambient Temp: 22.1°C; Tissue Temp: 21.6°C

Probe: ES3DV3 - SN3275; ConvF(4.57, 4.57, 4.57); Calibrated: 4/12/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn501; Calibrated: 4/12/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CD; Serial: 1736

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 10.4 W/kg

SAR(1 g) = 5.22 W/kg; SAR(10 g) = 2.43 W/kg

Deviation(1 g) = 5.67%

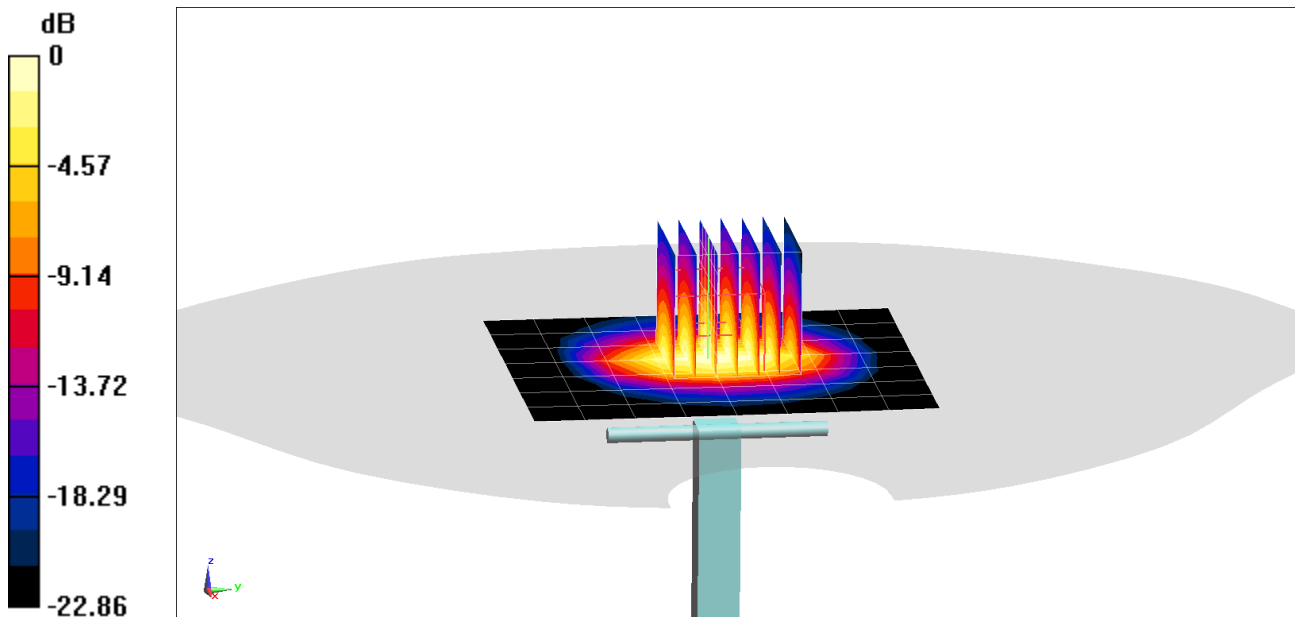

0 dB = 6.86 W/kg = 8.36 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 921

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450-2600 Body Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 1.954 \text{ S/m}$; $\epsilon_r = 51.365$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-13-2018; Ambient Temp: 23.0°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3329; ConvF(4.5, 4.5, 4.5); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1403; Calibrated: 2/8/2018

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 11.1 W/kg

SAR(1 g) = 5.21 W/kg; SAR(10 g) = 2.39 W/kg

Deviation(1 g) = 2.76%

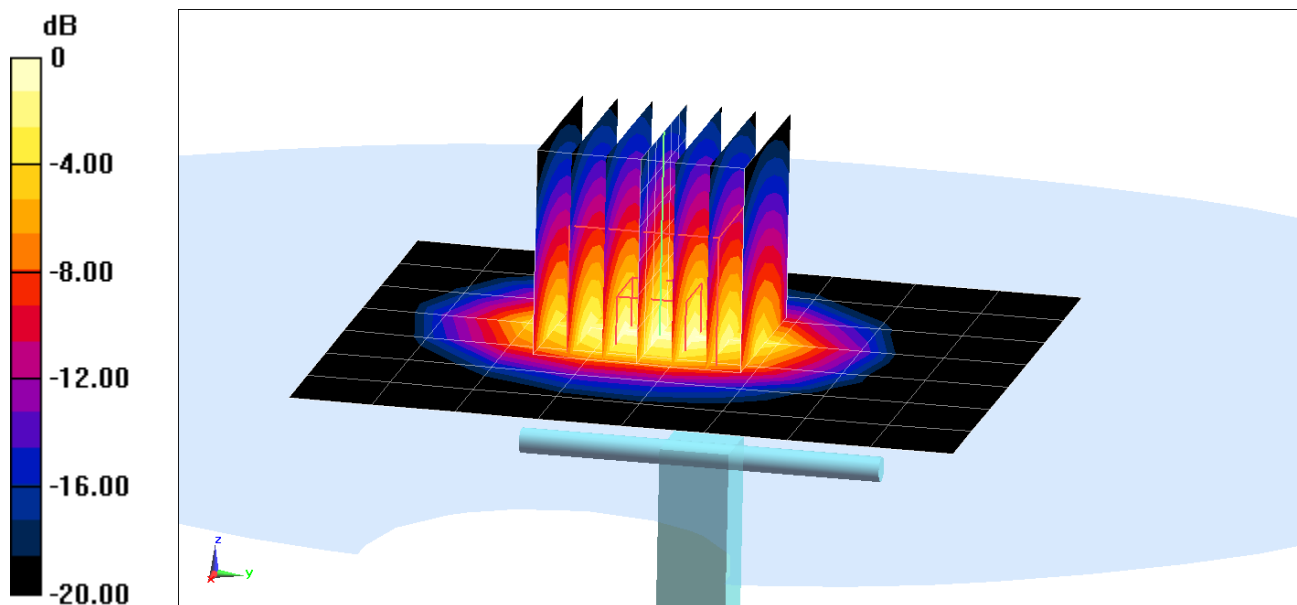

0 dB = 6.84 W/kg = 8.35 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1069

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450-2600 Body Medium parameters used:

$f = 2600 \text{ MHz}$; $\sigma = 2.149 \text{ S/m}$; $\epsilon_r = 50.833$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-13-2018; Ambient Temp: 23.0°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3329; ConvF(4.25, 4.25, 4.25); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1403; Calibrated: 2/8/2018

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

2600 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 12.6 W/kg

SAR(1 g) = 5.8 W/kg; SAR(10 g) = 2.56 W/kg

Deviation(1 g) = 4.88%

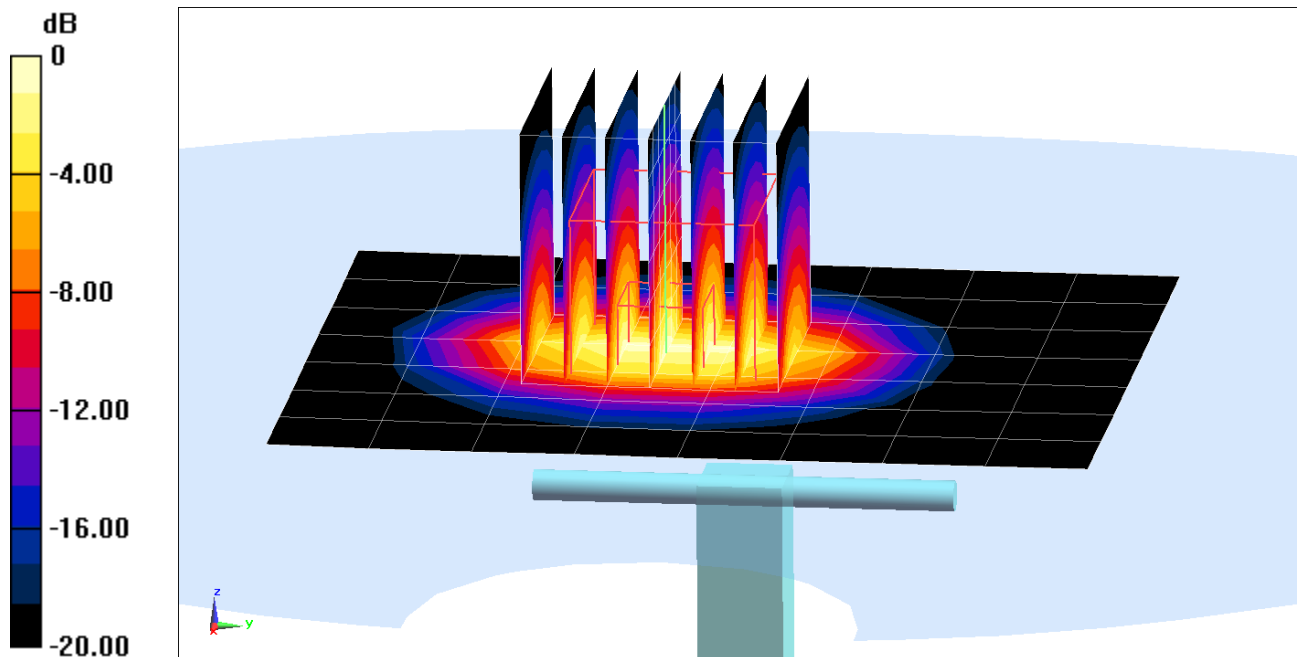

0 dB = 7.75 W/kg = 8.89 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1163

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used (interpolated):

$f = 5250 \text{ MHz}$; $\sigma = 5.535 \text{ S/m}$; $\epsilon_r = 48.184$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08-13-2018; Ambient Temp: 23.3°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN3837; ConvF(4.84, 4.84, 4.84); Calibrated: 3/16/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn604; Calibrated: 3/7/2018

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

5250 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 15.5 W/kg

SAR(1 g) = 3.57 W/kg; SAR(10 g) = 0.997 W/kg

Deviation(1 g) = -7.75%

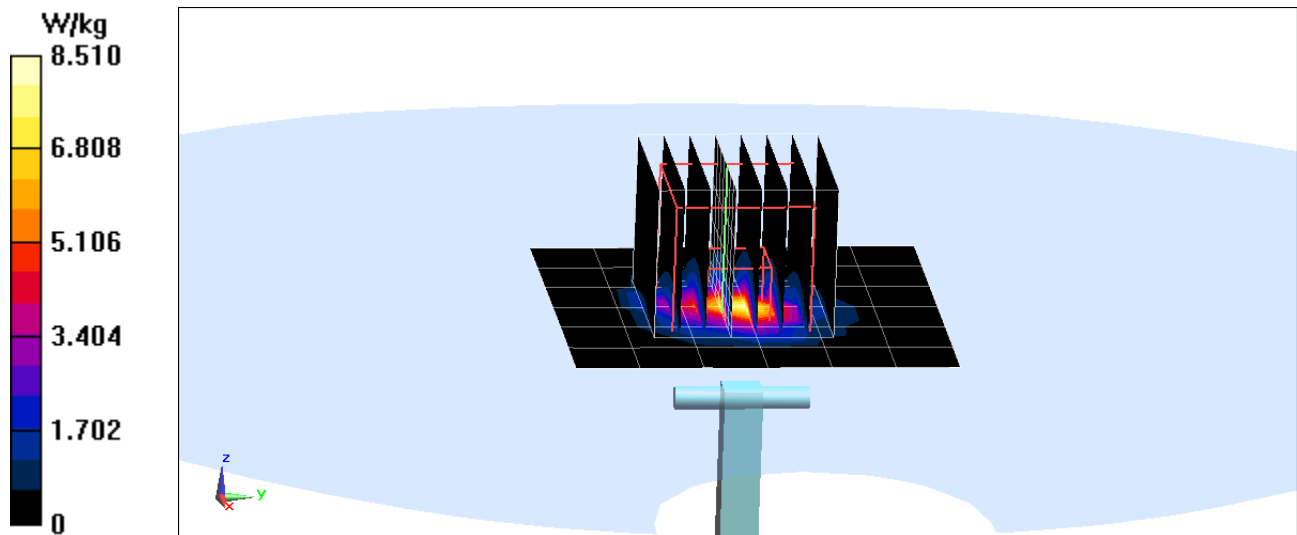

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1163

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5600 \text{ MHz}$; $\sigma = 6.001 \text{ S/m}$; $\epsilon_r = 47.597$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08-13-2018; Ambient Temp: 23.3°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN3837; ConvF(4.13, 4.13, 4.13); Calibrated: 3/16/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn604; Calibrated: 3/7/2018

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

5600 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.4 W/kg

SAR(1 g) = 3.85 W/kg; SAR(10 g) = 1.07 W/kg

Deviation(1 g) = -3.39%

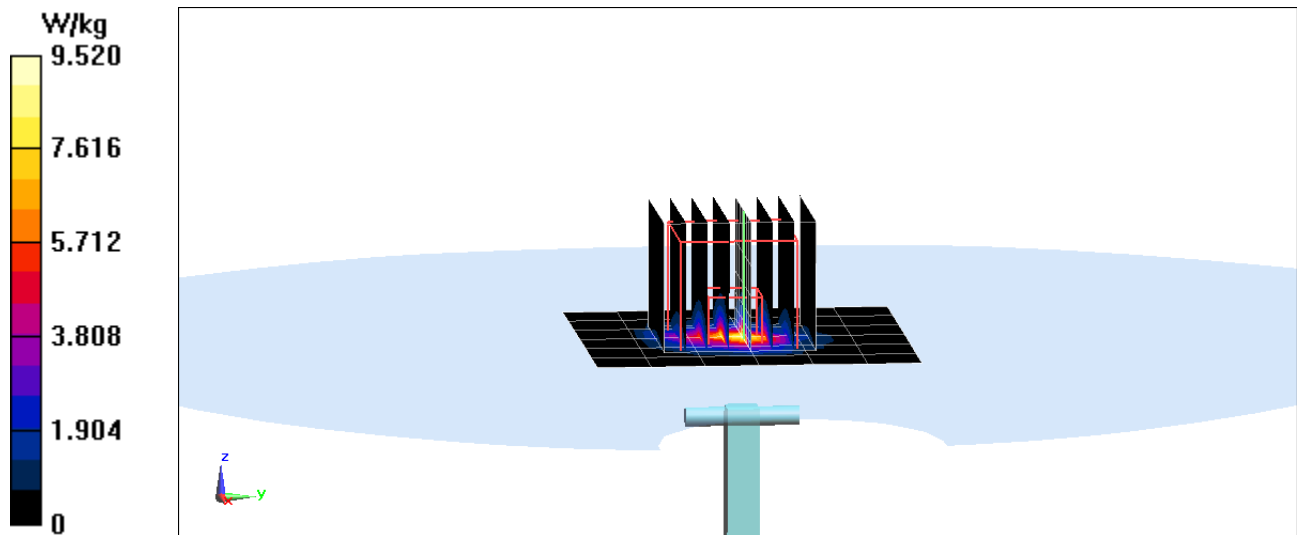

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1163

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used (interpolated):

$f = 5750 \text{ MHz}$; $\sigma = 6.214 \text{ S/m}$; $\epsilon_r = 47.375$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08-13-2018; Ambient Temp: 23.3°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN3837; ConvF(4.43, 4.43, 4.43); Calibrated: 3/16/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn604; Calibrated: 3/7/2018

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

5750 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 3.61 W/kg; SAR(10 g) = 0.995 W/kg

Deviation(1 g) = -6.72%

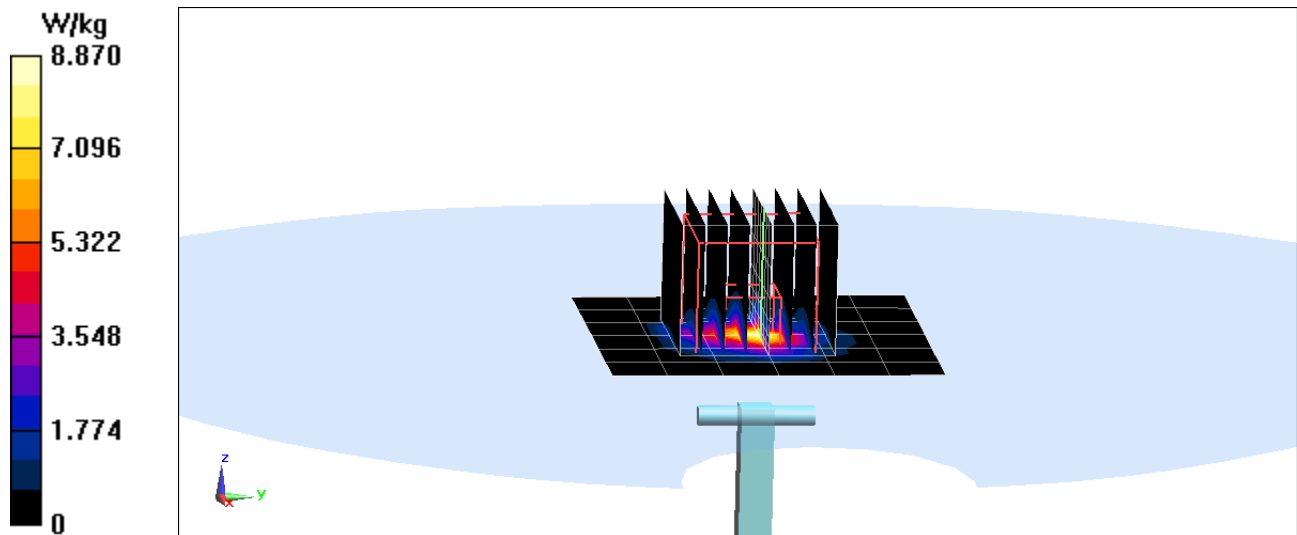

APPENDIX C: PROBE CALIBRATION



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D5GHzV2-1163_Sep17**

CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN:1163**

Calibration procedure(s) **QA CAL-22.v2**
Calibration procedure for dipole validation kits between 3-6 GHz

SCV
10/03/2017

Calibration date: **September 13, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 3503	31-Dec-16 (No. EX3-3503_Dec16)	Dec-17
DAE4	SN: 601	28-Mar-17 (No. DAE4-601_Mar17)	Mar-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Calibrated by: **Claudio Leubler** **Laboratory Technician**

Signature

Approved by: **Katja Pokovic** **Technical Manager**

Issued: September 13, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5250 MHz $\pm$ 1 MHz 5600 MHz $\pm$ 1 MHz 5750 MHz $\pm$ 1 MHz	

Head TSL parameters at 5250 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.71 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	36.7 $\pm$ 6 %	4.59 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5250 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.84 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	78.7 W/kg $\pm$ 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.24 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.5 W/kg $\pm$ 19.5 % (k=2)

Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	36.2 ± 6 %	4.95 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.19 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	82.1 W / kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.33 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.4 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5750 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.4	5.22 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	36.0 ± 6 %	5.12 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5750 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.80 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	78.2 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.21 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.2 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5250 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.36 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.0 ± 6 %	5.49 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5250 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.80 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	77.4 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.17 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.5 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.4 ± 6 %	5.96 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	8.03 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	79.7 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.24 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.2 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5750 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.3	5.94 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.1 ± 6 %	6.17 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5750 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.80 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	77.4 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.17 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.5 W/kg ± 19.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL at 5250 MHz

Impedance, transformed to feed point	47.6 Ω - 1.7 j Ω
Return Loss	- 30.3 dB

Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	50.0 Ω + 4.6 j Ω
Return Loss	- 26.8 dB

Antenna Parameters with Head TSL at 5750 MHz

Impedance, transformed to feed point	52.6 Ω + 5.4 j Ω
Return Loss	- 24.7 dB

Antenna Parameters with Body TSL at 5250 MHz

Impedance, transformed to feed point	46.6 Ω - 0.1 j Ω
Return Loss	- 29.0 dB

Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	51.3 Ω + 5.0 j Ω
Return Loss	- 25.9 dB

Antenna Parameters with Body TSL at 5750 MHz

Impedance, transformed to feed point	53.2 Ω + 5.1 j Ω
Return Loss	- 24.7 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.201 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	June 06, 2013

DASY5 Validation Report for Head TSL

Date: 13.09.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1163

Communication System: UID 0 - CW; Frequency: 5250 MHz, Frequency: 5600 MHz, Frequency: 5750 MHz

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.59$ S/m; $\epsilon_r = 36.7$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5600$ MHz; $\sigma = 4.95$ S/m; $\epsilon_r = 36.2$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5750$ MHz; $\sigma = 5.12$ S/m; $\epsilon_r = 36$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.58, 5.58, 5.58); Calibrated: 31.12.2016, ConvF(5.09, 5.09, 5.09); Calibrated: 31.12.2016, ConvF(5.02, 5.02, 5.02); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5250 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 69.64 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 28.4 W/kg

SAR(1 g) = 7.84 W/kg; SAR(10 g) = 2.24 W/kg

Maximum value of SAR (measured) = 17.5 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 70.03 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 31.4 W/kg

SAR(1 g) = 8.19 W/kg; SAR(10 g) = 2.33 W/kg

Maximum value of SAR (measured) = 18.9 W/kg



Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5750 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 68.11 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 30.7 W/kg

SAR(1 g) = 7.8 W/kg; SAR(10 g) = 2.21 W/kg

Maximum value of SAR (measured) = 18.1 W/kg

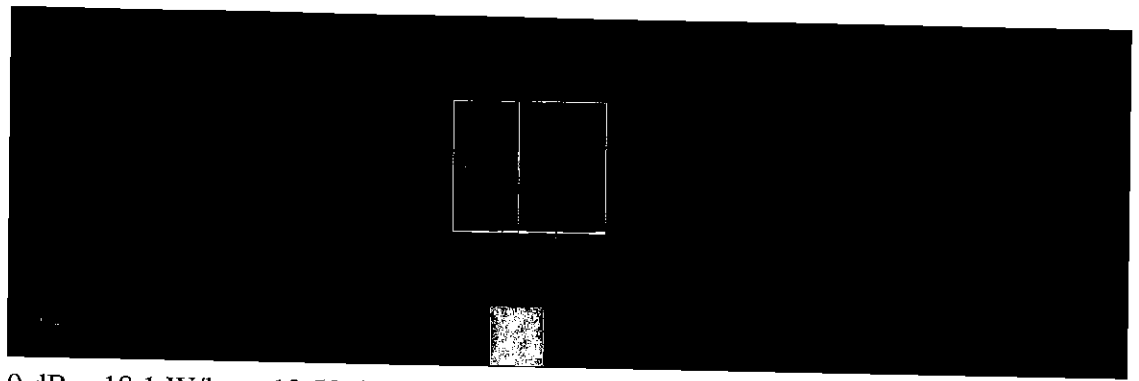


0 dB = 18.1 W/kg = 12.58 dBW/kg

Impedance Measurement Plot for Head TSL

13 Sep 2017 12:31:45
 CH1 S11 1 U FS 1: 47.576 Ω -1.7227 Ω 17.598 pF 5 250.000 000 MHz


*
 Del
 Cor
 Avg
 16
 H1d

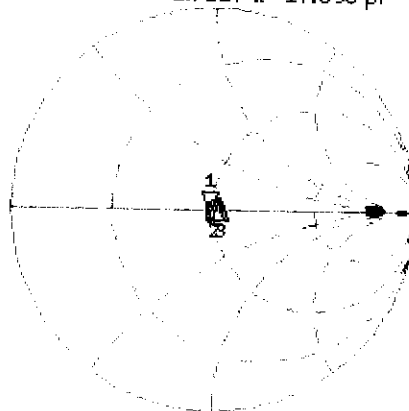

CH1 Markers
 2: 49.963 Ω
 4.5586 Ω
 5.60000 GHz
 3: 52.564 Ω
 5.3887 Ω
 5.75000 GHz

CH2 S11 LOG 5 dB/REF -20 dB 1: -30.324 dB 5 250.000 000 MHz

Cor
 Avg
 16
 H1d

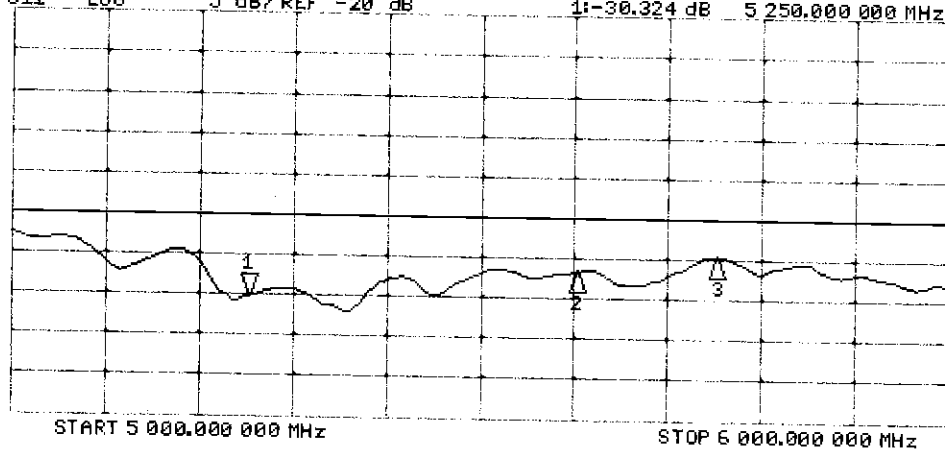

CH2 Markers
 2: -26.824 dB
 5.60000 GHz
 3: -24.710 dB
 5.75000 GHz

DASY5 Validation Report for Body TSL

Date: 06.09.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1163

Communication System: UID 0 - CW; Frequency: 5250 MHz, Frequency: 5600 MHz, Frequency: 5750 MHz

Medium parameters used: $f = 5250$ MHz; $\sigma = 5.49$ S/m; $\epsilon_r = 47$; $\rho = 1000$ kg/m³

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.96$ S/m; $\epsilon_r = 46.4$; $\rho = 1000$ kg/m³

Medium parameters used: $f = 5750$ MHz; $\sigma = 6.17$ S/m; $\epsilon_r = 46.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.14, 5.14, 5.14); Calibrated: 31.12.2016, ConvF(4.57, 4.57, 4.57); Calibrated: 31.12.2016, ConvF(4.51, 4.51, 4.51); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5250 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 64.77 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 30.6 W/kg

SAR(1 g) = 7.8 W/kg; SAR(10 g) = 2.17 W/kg

Maximum value of SAR (measured) = 18.5 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 64.00 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 33.7 W/kg

SAR(1 g) = 8.03 W/kg; SAR(10 g) = 2.24 W/kg

Maximum value of SAR (measured) = 19.6 W/kg



Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5750 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 62.82 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 34.3 W/kg

SAR(1 g) = 7.8 W/kg; SAR(10 g) = 2.17 W/kg

Maximum value of SAR (measured) = 19.4 W/kg

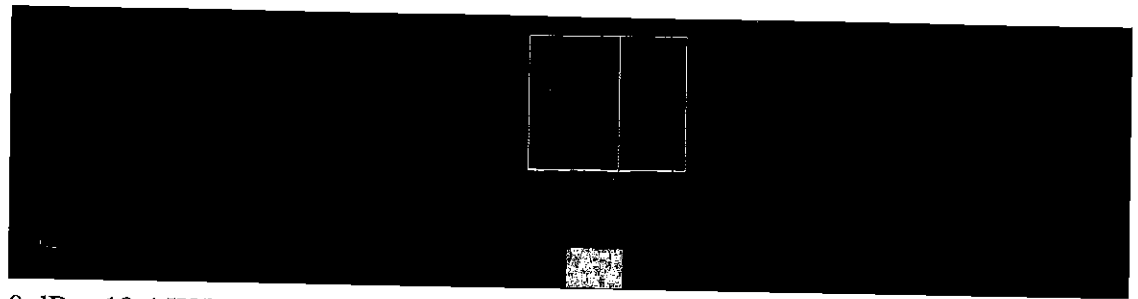


0 dB = 19.4 W/kg = 12.88 dBW/kg

Impedance Measurement Plot for Body TSL

6 Sep 2017 15:32:03
 CH1 S11 1 U FS 1: 46.590 Ω -128.91 m Ω 235.17 pF 5 250.000 000 MHz


*
 Del
 Cor
 Avg
 16
 H1d

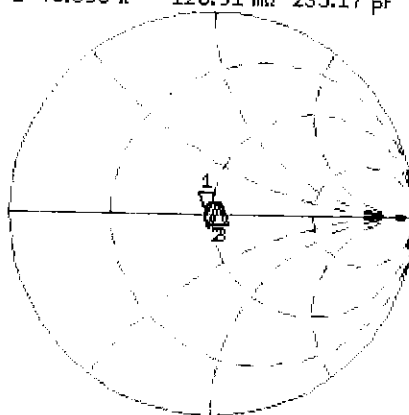

CH1 Markers
 2: 51.301 Ω
 4.9570 Ω
 5.60000 GHz
 3: 53.199 Ω
 5.0781 Ω
 5.75000 GHz

CH2 S11 LOG 5 dB/REF -20 dB 1: -29.039 dB 5 250.000 000 MHz

Cor
 Avg
 16
 H1d

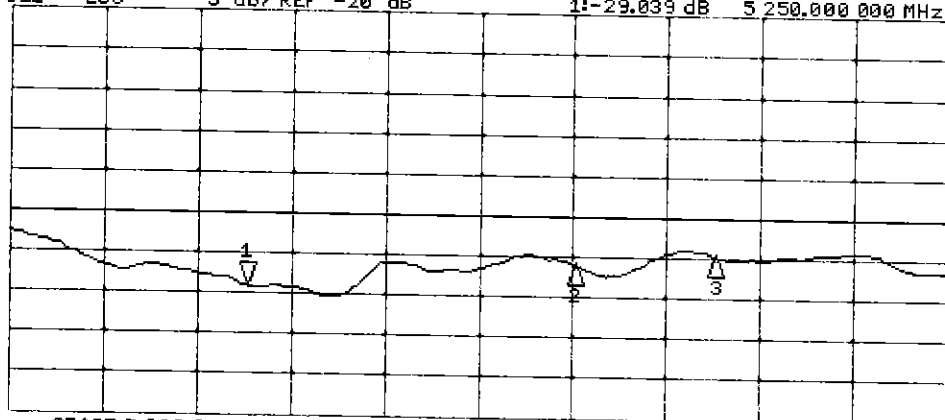

CH2 Markers
 2: -25.929 dB
 5.60000 GHz
 3: -24.720 dB
 5.75000 GHz



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D750V3-1057_Jun17**

CALIBRATION CERTIFICATE

Object **D750V3 - SN:1057**

Calibration procedure(s) **QA CAL-05.v9**
 Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **June 13, 2017**

BNW
8/3/2017
SC ✓
6/1/2018

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	31-May-17 (No. EX3-7349_May17)	May-18
DAE4	SN: 601	28-Mar-17 (No. DAE4-601_Mar17)	Mar-18

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Calibrated by: **Johannes Kurikka** Name: **Johannes Kurikka** Function: **Laboratory Technician**

Approved by: **Kalja Pokovic** Name: **Kalja Pokovic** Function: **Technical Manager**

Signature

[Signature]

[Signature]

Issued: June 15, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	41.2 $\pm$ 6 %	0.91 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.12 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.31 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.39 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.5	0.96 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	54.8 $\pm$ 6 %	0.97 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.22 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	8.79 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.46 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.79 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$55.9 \Omega + 0.1 j\Omega$
Return Loss	- 25.0 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$51.2 \Omega - 2.3 j\Omega$
Return Loss	- 32.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.035 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 08, 2011

DASY5 Validation Report for Head TSL

Date: 13.06.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1057

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.91 \text{ S/m}$; $\epsilon_r = 41.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.49, 10.49, 10.49); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, $d=15\text{mm}$ /Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 58.79 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.29 W/kg

SAR(1 g) = 2.12 W/kg; SAR(10 g) = 1.37 W/kg


Maximum value of SAR (measured) = 2.88 W/kg



Impedance Measurement Plot for Head TSL

13 Jun 2017 12:28:02
 [CH1] S11 1 U FS 1: 55.930 Ω 0.0645 Ω 13.677 μH 750.000 000 MHz

*
 De1
 CA

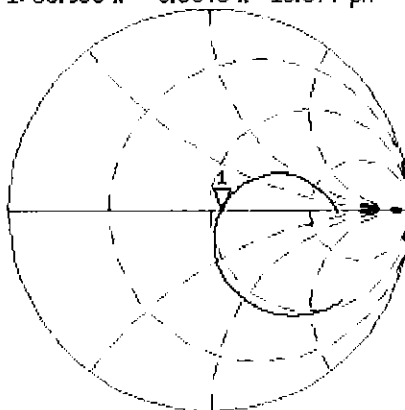

Avg
 16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-25.037 dB 750.000 000 MHz

CA

Avg
 16

H1d

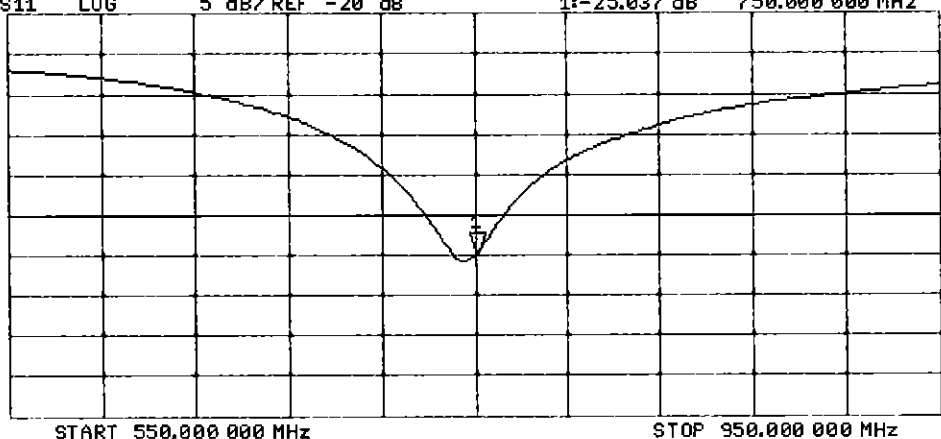

DASY5 Validation Report for Body TSL

Date: 12.06.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1057

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.97$ S/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.35, 10.35, 10.35); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.76 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 3.34 W/kg

SAR(1 g) = 2.22 W/kg; SAR(10 g) = 1.46 W/kg

Maximum value of SAR (measured) = 2.93 W/kg

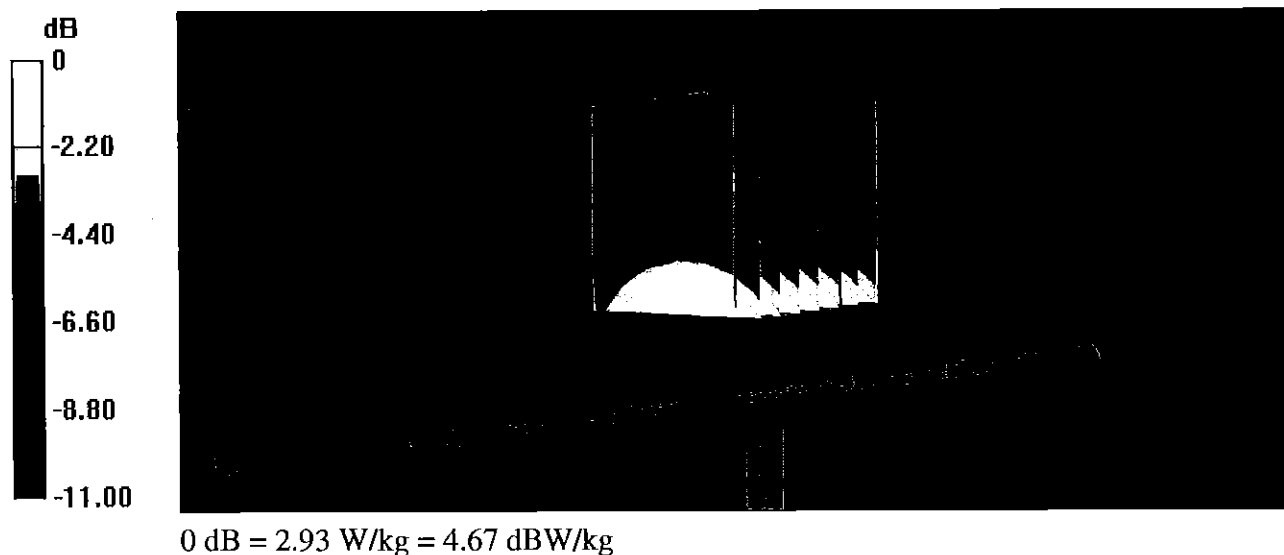

Impedance Measurement Plot for Body TSL

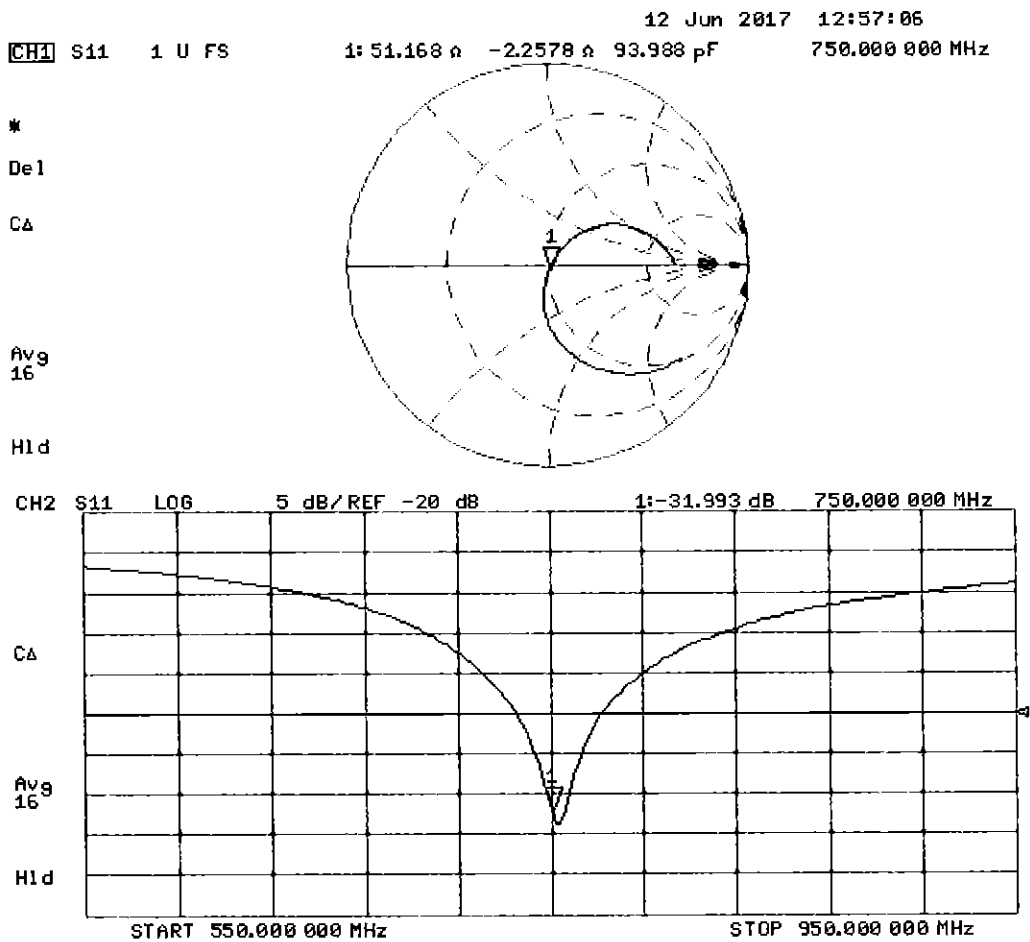

Certification of Calibration

Object D750V3 – SN: 1057

Calibration procedure(s) Procedure for Calibration Extension for SAR Dipoles.



Extended Calibration date: June 01, 2018

Description: SAR Validation Dipole at 750 MHz.

Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8753ES	S-Parameter Network Analyzer	9/14/2017	Annual	9/14/2018	US39170118
Agilent	N5182A	MXG Vector Signal Generator	3/19/2018	Annual	3/19/2019	US46240505
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	343972
Anritsu	ML2496A	Power Meter	10/9/2017	Annual	10/9/2018	1138001
Anritsu	MA2411B	Pulse Power Sensor	11/15/2017	Annual	11/15/2018	1339007
Anritsu	MA2411B	Pulse Power Sensor	11/22/2017	Annual	11/22/2018	1339008
Control Company	4040	Temperature / Humidity Monitor	2/28/2018	Biennial	2/28/2020	150761911
Control Company	4352	Ultra Long Stem Thermometer	2/14/2017	Biennial	2/14/2019	170112507
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/1/2017	Annual	6/1/2018	MY53401181
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
SPEAG	DAKS-3.5	Portable DAK	9/5/2017	Annual	9/5/2018	1045
SPEAG	EX3DV4	SAR Probe	1/26/2018	Annual	1/26/2019	7490
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/26/2018	Annual	1/26/2019	1532

Measurement Uncertainty = $\pm 23\%$ (k=2)

	Name	Function	Signature
Calibrated By:	Sangmin Cha	Biomedical Engineer II	
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	

DIPOLE CALIBRATION EXTENSION

Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:



1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.

The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:



Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g) W/kg @ 23.0 dBm	Measured Head SAR (1g) W/kg @ 23.0 dBm	Deviation 1g (%)	Certificate SAR Target Head (10g) W/kg @ 23.0 dBm	Measured Head SAR (10g) W/kg @ 23.0 dBm	Deviation 10g (%)	Certificate Impedance Head (Ohm) Real	Measured Impedance Head (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Head (Ohm) Imaginary	Measured Impedance Head (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (%)	PASS/FAIL
6/13/2018	6/1/2018	1.035	1.662	1.66	-0.12%	1.078	1.09	1.11%	55.9	51.8	4.1	0.1	-3.9	4	-25	-27.7	-10.80%	PASS

Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g) W/kg @ 23.0 dBm	Measured Body SAR (1g) W/kg @ 23.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 23.0 dBm	Measured Body SAR (10g) W/kg @ 23.0 dBm	Deviation 10g (%)	Certificate Impedance Body (Ohm) Real	Measured Impedance Body (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Body (Ohm) Imaginary	Measured Impedance Body (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (%)	PASS/FAIL
6/13/2018	6/1/2018	1.035	1.758	1.67	-5.01%	1.158	1.11	-4.15%	51.2	48.4	2.8	-2.3	-6.2	3.9	-32	-27.2	15.00%	PASS

Impedance & Return-Loss Measurement Plot for Head TSL

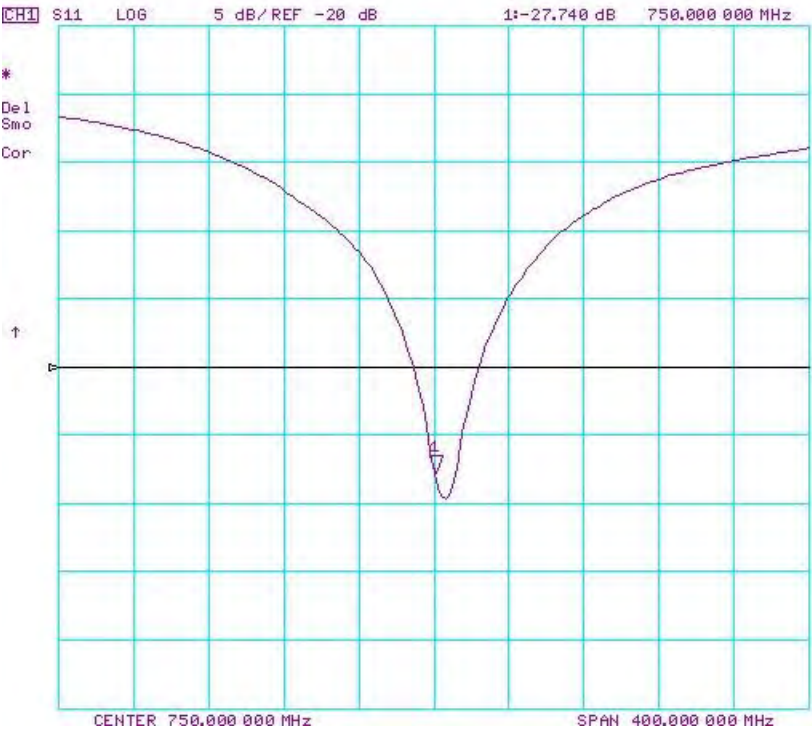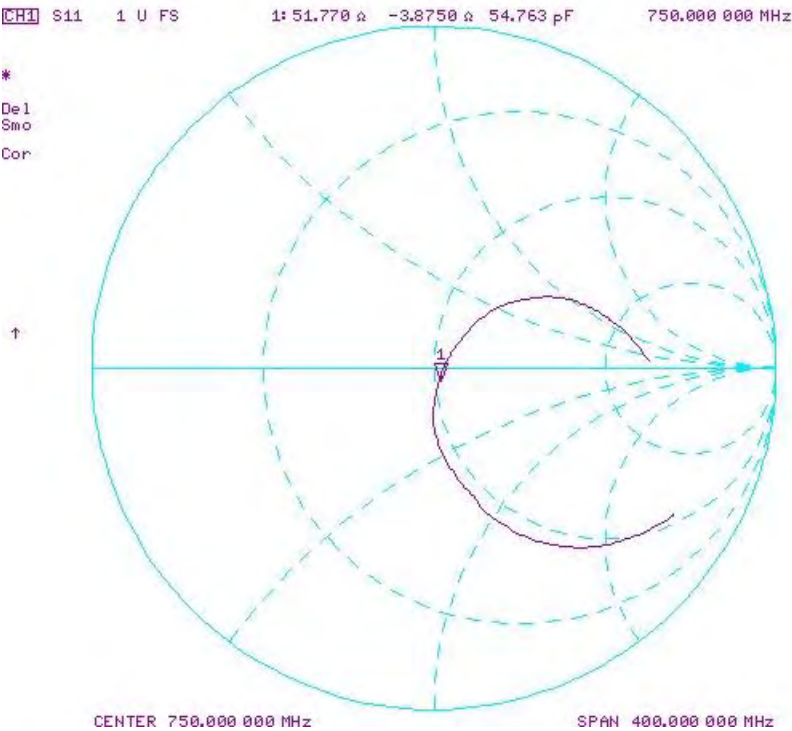

Impedance & Return-Loss Measurement Plot for Body TSL

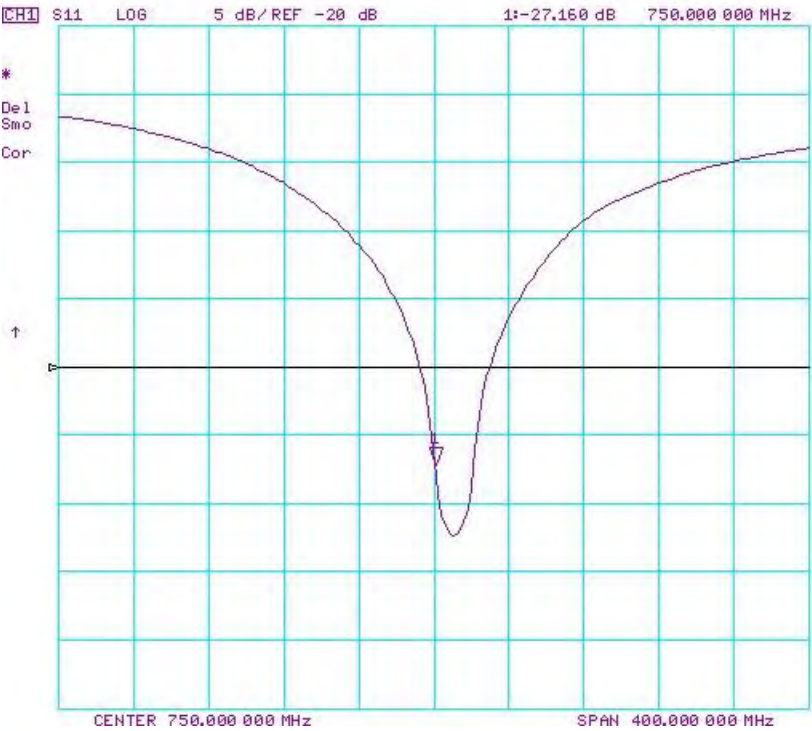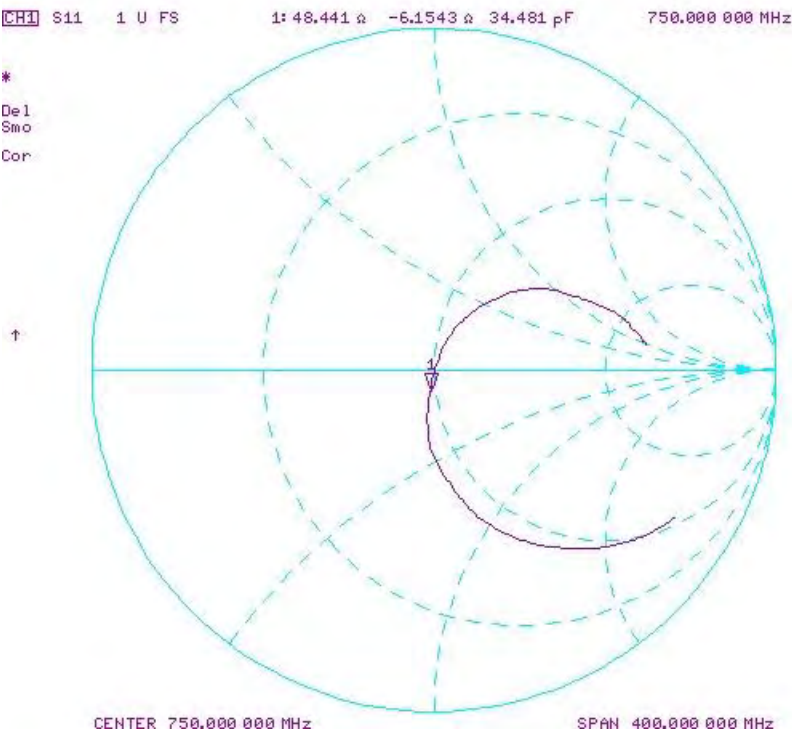



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PG Test**

Certificate No: **D750V3-1097_Sep17**

CALIBRATION CERTIFICATE

Object **D750V3 - SN:1097**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

SC ✓
 10/03/2017

Calibration date: **September 08, 2017**

SC ✓
 9/8/2018

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	31-May-17 (No. EX3-7349_May17)	May-18
DAE4	SN: 601	28-Mar-17 (No. DAE4-601_Mar17)	Mar-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Calibrated by: **Claudio Leubler** Name: **Claudio Leubler** Function: **Laboratory Technician**

Signature:

Approved by: **Katja Pokojic** Name: **Katja Pokojic** Technical Manager:

Signature:

Issued: September 8, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	41.2 $\pm$ 6 %	0.90 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.08 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.22 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.36 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.39 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.5	0.96 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	55.5 $\pm$ 6 %	0.96 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.14 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	8.56 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.42 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.68 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	54.4 Ω - 0.6 j Ω
Return Loss	- 27.5 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	50.0 Ω - 3.6 j Ω
Return Loss	- 28.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.034 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 05, 2013

DASY5 Validation Report for Head TSL

Date: 08.09.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1097

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.9 \text{ S/m}$; $\epsilon_r = 41.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.49, 10.49, 10.49); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 58.59 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.19 W/kg

SAR(1 g) = 2.08 W/kg; SAR(10 g) = 1.36 W/kg

Maximum value of SAR (measured) = 2.80 W/kg

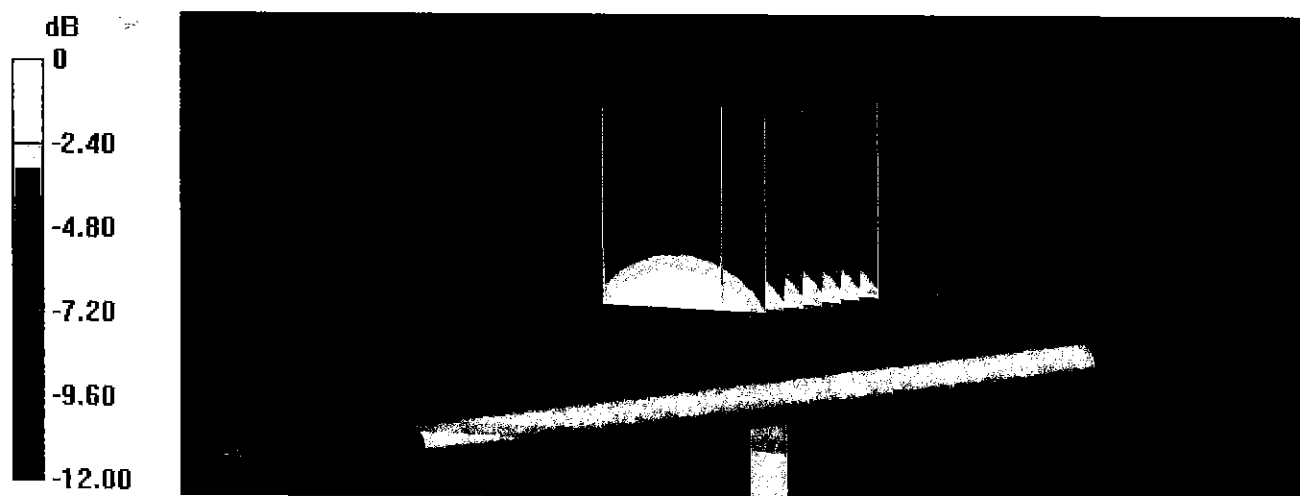

0 dB = 2.80 W/kg = 4.47 dBW/kg

Impedance Measurement Plot for Head TSL

8 Sep 2017 13:09:24
 CH1 S11 1 U FS 1: 54.383 Ω -552.73 m Ω 383.92 pF 750.000 000 MHz

*

De1

CA

Avg
16

H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-27.463 dB 750.000 000 MHz

CA

Avg
16

H1d

START 550.000 000 MHz

STOP 950.000 000 MHz

DASY5 Validation Report for Body TSL

Date: 08.09.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1097

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.96 \text{ S/m}$; $\epsilon_r = 55.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.35, 10.35, 10.35); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.96 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 3.16 W/kg

SAR(1 g) = 2.14 W/kg; SAR(10 g) = 1.42 W/kg

Maximum value of SAR (measured) = 2.81 W/kg

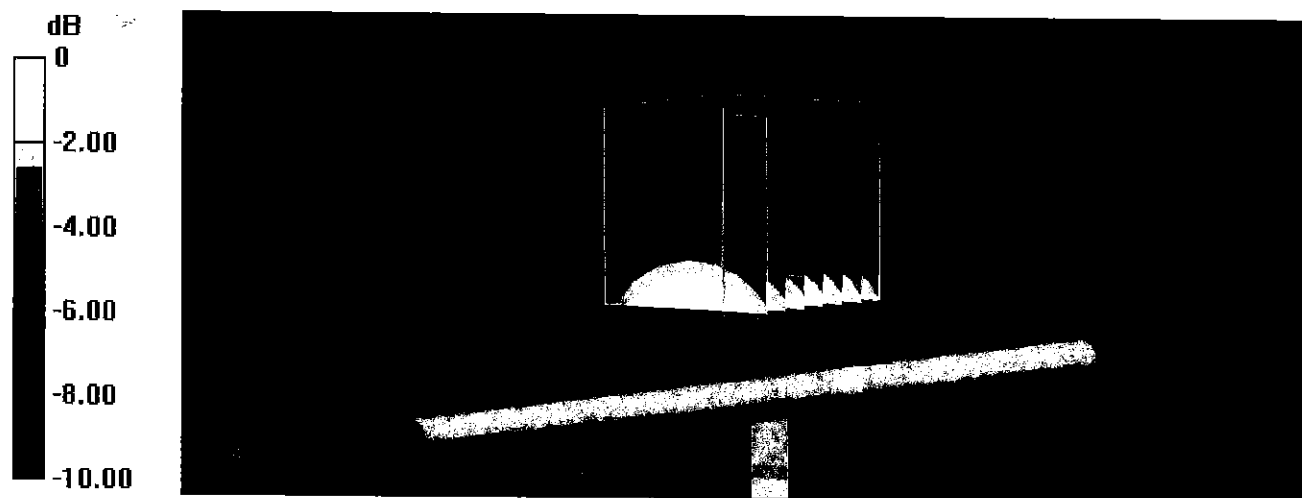

0 dB = 2.81 W/kg = 4.49 dBW/kg

Impedance Measurement Plot for Body TSL

8 Sep 2017 13:08:43
[CH1] S11 1 U FS 1: 49.951 Ω -3.6172 Ω 58.666 pF 750.000 000 MHz

*
De1
CA

Avg
15

H1d

CH2 S11 LOG 5 dB/REF -20 dB 1: -28.833 dB 750.000 000 MHz

CA

Avg
16

H1d

START 550.000 000 MHz

STOP 950.000 000 MHz