



## MEASUREMENT REPORT FCC Part 90

**Applicant Name:**

Apple Inc.  
1 Infinite Loop  
Cupertino, CA  
United States

**Date of Testing:**

10/31/2017-2/15/2018

**Test Site/Location:**

PCTEST Lab. Morgan Hill, CA, USA

**Test Report Serial No.:**

1C1710060006-04-R2.BCG

<b>FCC ID:</b>	<b>BCGA1954</b>
<b>APPLICANT:</b>	<b>Apple Inc.</b>

**Application Type:**

Certification

**Model:**

A1954

**EUT Type:**

Tablet Device

**FCC Classification:**

PCS Licensed Transmitter (PCB)

**FCC Rule Part:**

§2.1049, §90.691

**Test Procedure(s):**

ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1C1710060006-04-R2.BCG) supersedes and replaces the previously issued test report (S/N: 1C1710060006-04-R1.BCG) on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


  
Randy Ortanez  
President




FCC ID: BCGA1954	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device	Page 1 of 41

## T A B L E   O F   C O N T E N T S

---

1.0	INTRODUCTION .....	4
1.1	Scope .....	4
1.2	PCTEST Test Location .....	4
1.3	Test Facility / Accreditations .....	4
2.0	PRODUCT INFORMATION .....	5
2.1	Equipment Description .....	5
2.2	Device Capabilities .....	5
2.3	Antenna Configuration .....	5
2.4	Test Support Equipment .....	5
2.5	Test Configuration .....	5
2.6	Software and Firmware .....	6
2.7	EMI Suppression Device(s)/Modifications .....	6
3.0	DESCRIPTION OF TESTS .....	7
3.1	Evaluation Procedure .....	7
3.2	Radiated Power and Radiated Spurious Emissions .....	8
4.0	MEASUREMENT UNCERTAINTY .....	9
5.0	TEST EQUIPMENT CALIBRATION DATA .....	10
6.0	SAMPLE CALCULATIONS .....	11
7.0	TEST RESULTS .....	12
7.1	Summary .....	12
7.2	Occupied Bandwidth .....	13
7.3	Spurious and Harmonic Emissions at Antenna Terminal .....	19
7.4	Band Edge Emissions at Antenna Terminal .....	24
7.5	Conducted Power Output Data .....	30
7.6	Radiated Spurious Emissions Measurements .....	32
7.7	Frequency Stability / Temperature Variation .....	36
8.0	CONCLUSION .....	41

FCC ID: BCGA1954	<b>PCTEST®</b> ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CERTIFICATION)
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device	Approved by: Quality Manager  Page 2 of 41



## MEASUREMENT REPORT

### FCC Part 90

Mode	Tx Frequency (MHz)	Emission Designator	Measurement	Max. Power (W)	Max. Power (dBm)	Modulation
CDMA800 (BC10)	817.25-822.75	1M27F9W	Conducted	0.302	24.80	CDMA
LTE Band 26	814.7 - 823.3	1M08G7D	Conducted	0.278	24.44	QPSK
LTE Band 26	814.7 - 823.3	1M08W7D	Conducted	0.224	23.50	16-QAM
LTE Band 26	815.5 - 822.5	2M70G7D	Conducted	0.281	24.49	QPSK
LTE Band 26	815.5 - 822.5	2M70W7D	Conducted	0.225	23.52	16-QAM
LTE Band 26	816.5 - 821.5	4M50G7D	Conducted	0.279	24.46	QPSK
LTE Band 26	816.5 - 821.5	4M49W7D	Conducted	0.226	23.55	16-QAM
LTE Band 26	819	8M96G7D	Conducted	0.281	24.49	QPSK
LTE Band 26	819	8M97W7D	Conducted	0.238	23.76	16-QAM

#### EUT Overview

FCC ID: BCGA1954	 <b>MEASUREMENT REPORT</b> <small>(CERTIFICATION)</small>			Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device		

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

### 1.3 Test Facility / Accreditations

**Measurements were performed at PCTEST Engineering Lab located in Morgan Hill, CA 95037, U.S.A.**

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: BCGA1954	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device	Page 4 of 41

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA1954**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 90.691.

**Test Device Serial No.:** F9FVT00LJM4W, F9FVT00RJM4W

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 CDMA/EvDO Rev0/A, 1x Advanced (BC0, BC1, BC10), 850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE),

### 2.3 Antenna Configuration

Following antennas were used for testing

Frequency (MHz)	Antenna Gain (dBi)
814-824	0.2

**Table 2-1. Test Peak Antenna Gain**

### 2.4 Test Support Equipment

1	Apple MacBook	Model:	A1502	S/N:	C02P4004G1R8
	w/ AC/DC Adapter	Model:	A1435	S/N:	C04325505K1F288BG
2	Apple USB Cable	Model:	Kanzi	S/N:	3251F5
3	Apple Earphone	Model:	N/A	S/N:	N/A
4	USB Lightning Cable	Model:	N/A	S/N:	N/A
5	w/ 12 W AC Adapter	Model:	A1401	S/N:	N/A
6	DC Power Supply	Model:	EP20571-110V	S/N:	N/A

**Table 2-2. Test Support Equipment Used**

### 2.5 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-D-2010 and KDB 971168 D01 v03. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

There are two vendors of the radio modules, variant 1 and variant 2. Both radio modules have the same mechanical outline, same on-board antenna matching circuit, identical antenna structure, and are built and tested

FCC ID: BCGA1954	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device	Page 5 of 41	

to conform to the same specifications and to operate within the same tolerances. The worst case configuration was found between the two variants. The EUT was also investigated with and without charger.

The emissions below 1GHz and above 18GHz were tested with the highest transmitting power channel and the worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report. The worst orientation was found to be Y-orientation (landscape).

## 2.6 Software and Firmware

The test was conducted with firmware version 15E61570I installed on the EUT.

For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance.

## 2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: BCGA1954	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device	Page 6 of 41

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-D-2010) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v03) were used in the measurement of the EUT.

FCC ID: BCGA1954	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device	Page 7 of 41

### 3.2 Radiated Power and Radiated Spurious Emissions

#### §2.1053, §90.635, §90.691

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Per the guidelines of KDB 412172 D01 v01r01, radiated power levels are measured using the following formula:

$$\text{ERP or EIRP} = P_T + G_T - L_c$$

Where  $P_T$  is the transmitter output power, expressed in dBm,  $G_T$  is the gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP), and  $L_c$  signal attenuation in the connecting cable between the transmitter and antenna in dB.

Per the guidance of ANSI/TIA-603-D-2010, a half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [\text{dBm}] = P_g [\text{dBm}] - \text{cable loss } [\text{dB}] + \text{antenna gain } [\text{dBd/dBi}]$$

Where,  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g [\text{dBm}] - \text{cable loss } [\text{dB}]$ .

The calculated  $P_d$  levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of  $43 + 10\log_{10}(\text{Power } [\text{Watts}])$  specified in 90.691.

For fundamental radiated power measurements, the guidance of KDB 971168 D01 v03 is used to record the EUT power level that is subsequently matched via the aforementioned substitution method given in ANSI/TIA-603-D-2010.

FCC ID: BCGA1954	PCTEST Engineering Laboratory, Inc.		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device		Page 8 of 41

## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: BCGA1954	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device	Page 9 of 41

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	AM LTx1	Licensed Transmitter Cable Set	3/17/2017	Annual	3/17/2018	AM LTX1
-	EMI 3117-ESW1	Radiated Cable Set	3/1/2017	Biennial	3/1/2018	N/A
-	EMI HL562E-ESW1	Radiated Cable Set	2/28/2017	Biennial	2/28/2018	N/A
ESPEC	SU-241	Temperature Chamber	3/10/2017	Annual	3/10/2018	92009574
Keysight Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	3/13/2017	Annual	3/13/2018	MY49430244
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	11/9/2016	Annual	11/9/2018	152026
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	5/8/2017	Annual	5/8/2018	161616-DF
Rohde & Schwarz	ESW26	ESW26 EMI Test Receiver	7/15/2017	Annual	7/15/2018	101299
Rohde & Schwarz	OSP130	Open Switch and Control Unit	1/18/2017	Annual	1/18/2018	100970
Rohde & Schwarz	SFUNIT-RX	TS-SFUNIT SHIELDED FILTER UNIT	2/3/2017	Annual	2/3/2018	102131
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	2/3/2017	Annual	2/3/2018	102325
Rohde & Schwarz	TC-TA18	CROSS POL. VIVALDI ANT (400MHz - 18GHz)	11/13/2017	Annual	11/13/2018	101056-AE

**Table 5-1. Test Equipment**

**Notes:**

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCGA1954	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device		Page 10 of 41

## 6.0 SAMPLE CALCULATIONS

### Emission Designator

#### **Emission Designator = 1M25F9W**

CDMA BW = 1.25 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data) (Measured at the 99.75% power bandwidth)

### Spurious Radiated Emission – BC10

#### **Example: Channel 450 CDMA BC10 Mode 3<sup>rd</sup> Harmonic (2451.75MHz)**

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 2451.75 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm - (-24.80) = 50.3 dBc.

### Emission Designator

#### QPSK Modulation

#### **Emission Designator = 8M62G7D**

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

#### 16QAM Modulation

#### **Emission Designator = 8M45W7D**

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

### Spurious Radiated Emission – LTE Band

#### **Example: Middle Channel LTE Mode 2<sup>nd</sup> Harmonic (1564 MHz)**

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm - (-24.80).

FCC ID: BCGA1954	PCTEST® ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device		Page 11 of 41

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: Apple Inc.  
 FCC ID: BCGA1954  
 FCC Classification: PCS Licensed Transmitter (PCB)  
 Mode(s): CDMA / EvDO / LTE  
 Band: Band Class 10 / Band 26

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
2.1051 90.691	Conducted Band Edge / Spurious Emissions	> 43 + log <sub>10</sub> (P[Watts]) for all out-of-band emissions except > 50 + 10log <sub>10</sub> (P[Watts]) at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge		PASS	Sections 7.3, 7.4
2.1055 90.213	Frequency Stability	< 2.5 ppm		PASS	Section 7.7
2.1046 90.635	Conducted Power	< 100 Watts		PASS	Section 7.5
2.1053 90.691	Radiated Spurious Emissions	> 43 + log <sub>10</sub> (P[Watts]) for all out-of-band emissions except > 50 + 10log <sub>10</sub> (P[Watts]) at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge		PASS	Section 7.6

**Table 7-1. Summary of Test Results**

#### Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Section 7.0 were taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "2G/3G Automation," Version 3.9.

FCC ID: BCGA1954	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device	Page 12 of 41	

## 7.2 Occupied Bandwidth

§2.1049

### Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

### Test Procedure Used

KDB 971168 D01 v03 – Section 4.2

### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


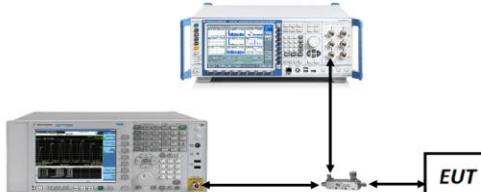


Figure 7-1. Test Instrument & Measurement Setup


### Test Notes

None.

FCC ID: BCGA1954	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device	Page 13 of 41

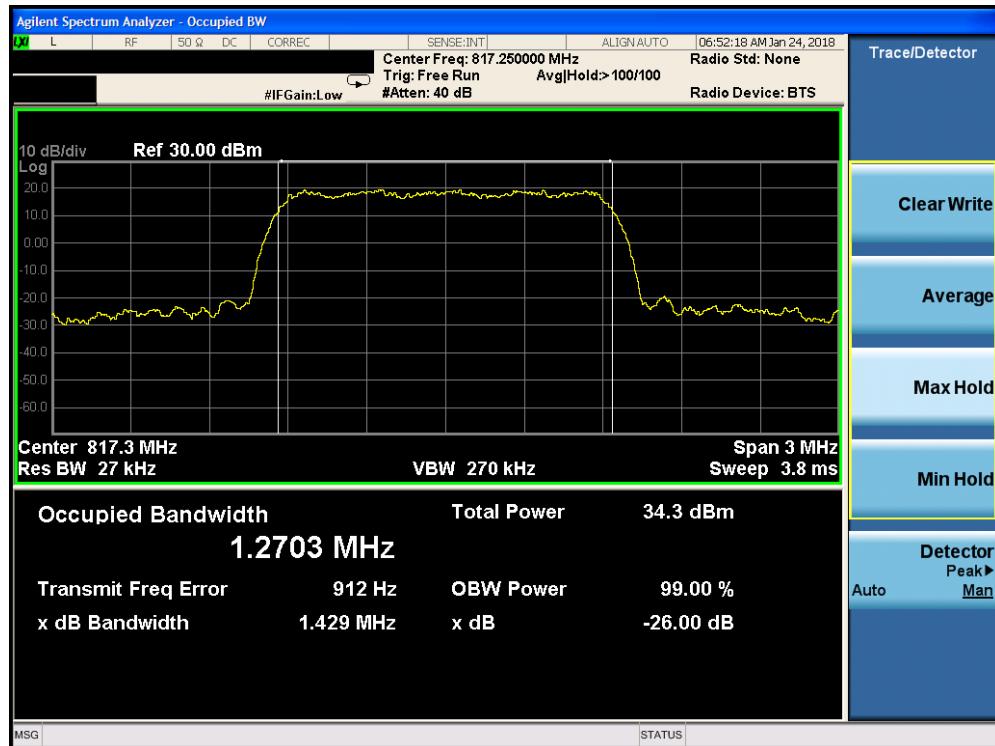


Plot 7-1. Occupied Bandwidth Plot (Ch. 450)

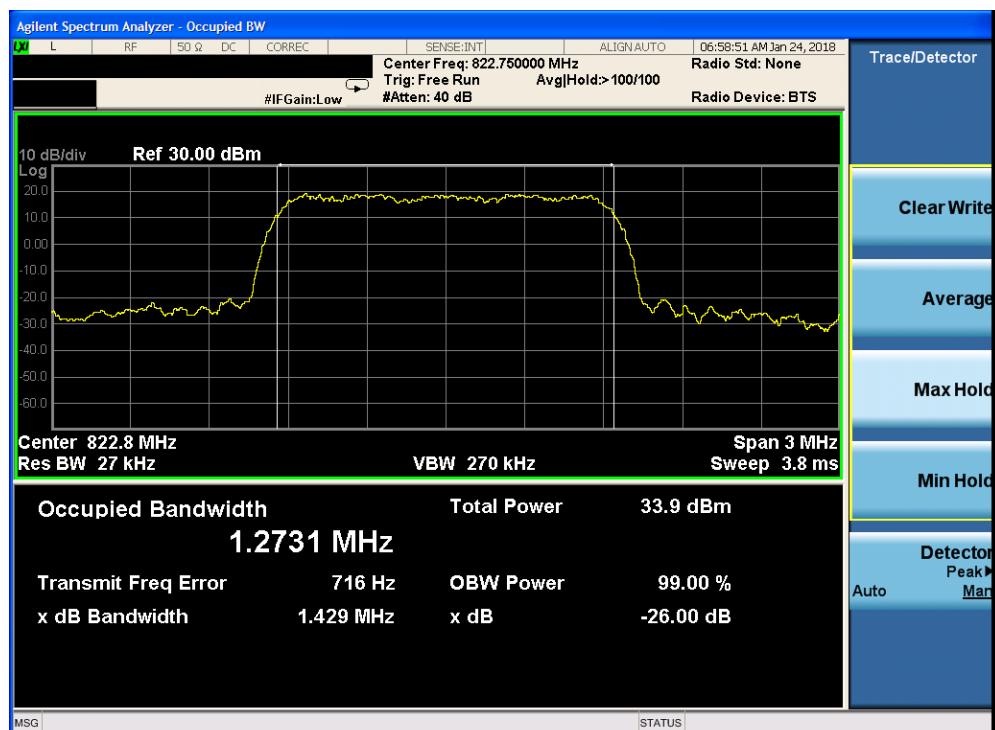


Plot 7-2. Occupied Bandwidth Plot (Ch. 670)

FCC ID: BCGA1954	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device		Page 14 of 41

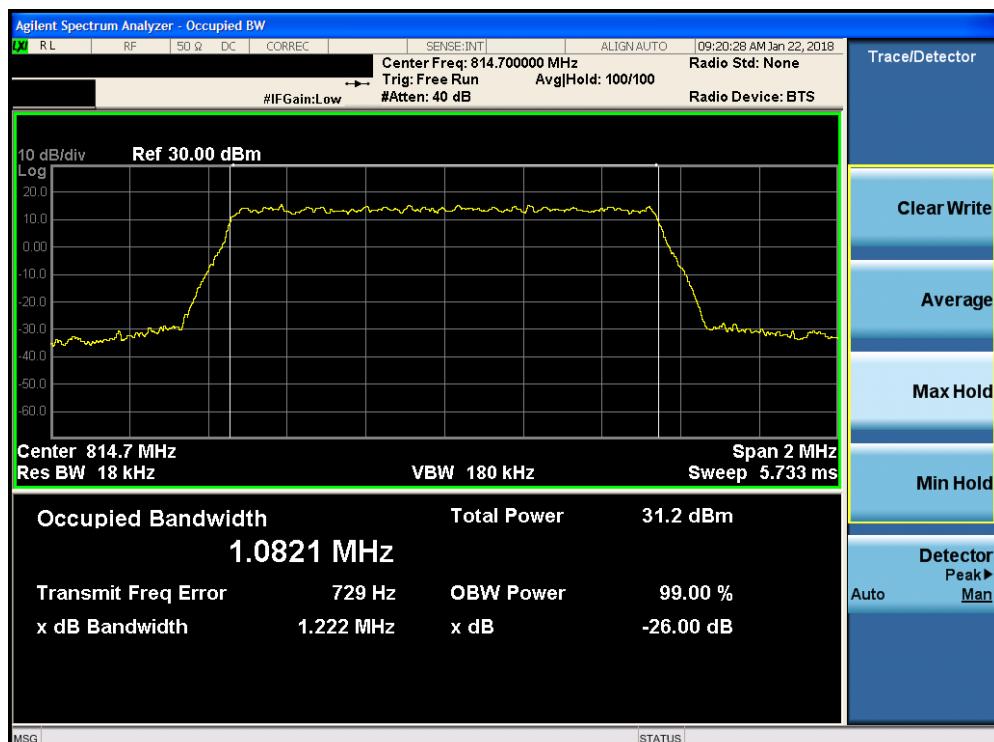


Plot 7-3. Occupied Bandwidth Plot (1.4MHz QPSK – RB Size 6– Low Channel)

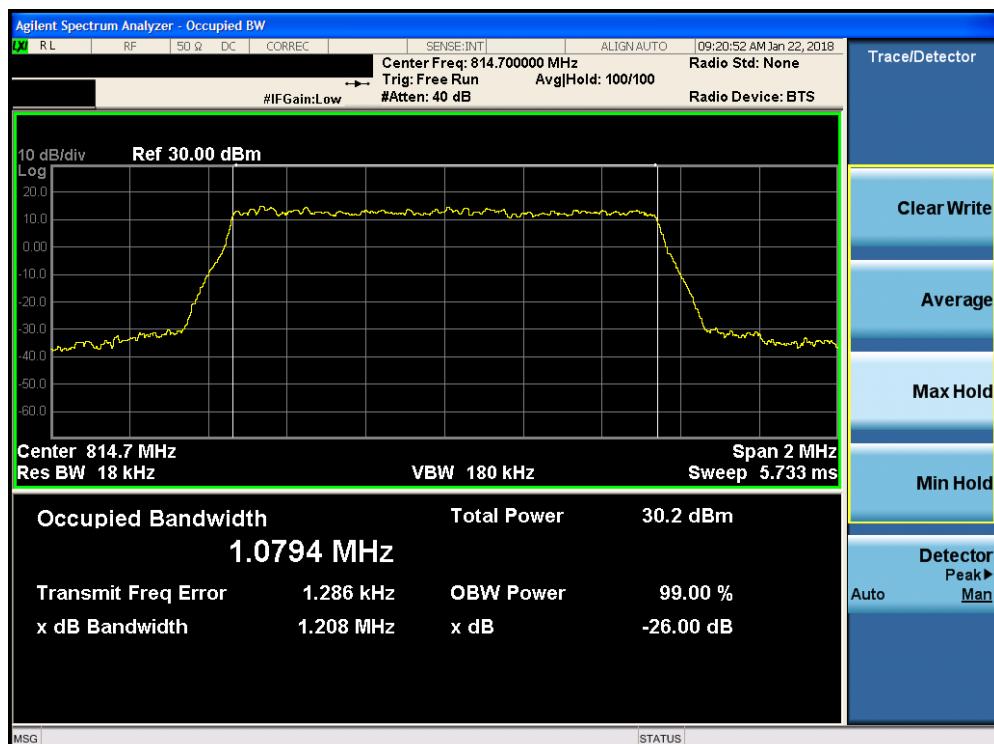


Plot 7-4. Occupied Bandwidth Plot (1.4MHz 16-QAM – RB Size 6– Low Channel)

FCC ID: BCGA1954	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device		Page 15 of 41

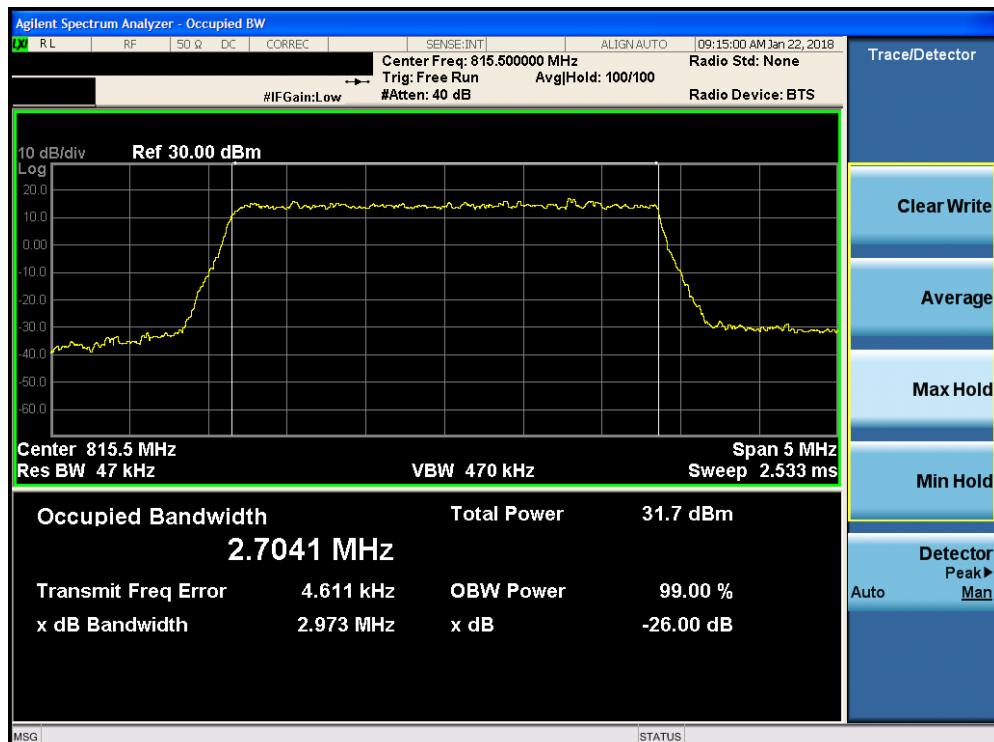

**Plot 7-5. Occupied Bandwidth Plot (3MHz QPSK – RB Size 15– Low Channel)**

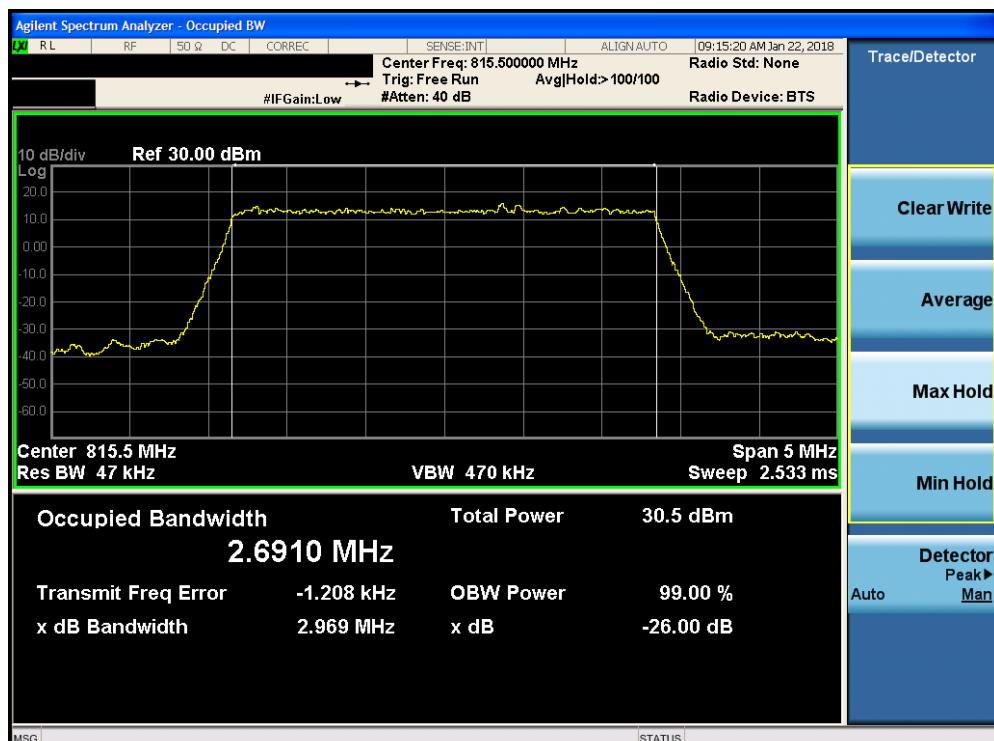


**Plot 7-6. Occupied Bandwidth Plot (3MHz 16-QAM – RB Size 15– Low Channel)**

FCC ID: BCGA1954	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device	Page 16 of 41	



**Plot 7-7. Occupied Bandwidth Plot (5MHz QPSK – RB Size 25– Low Channel)**

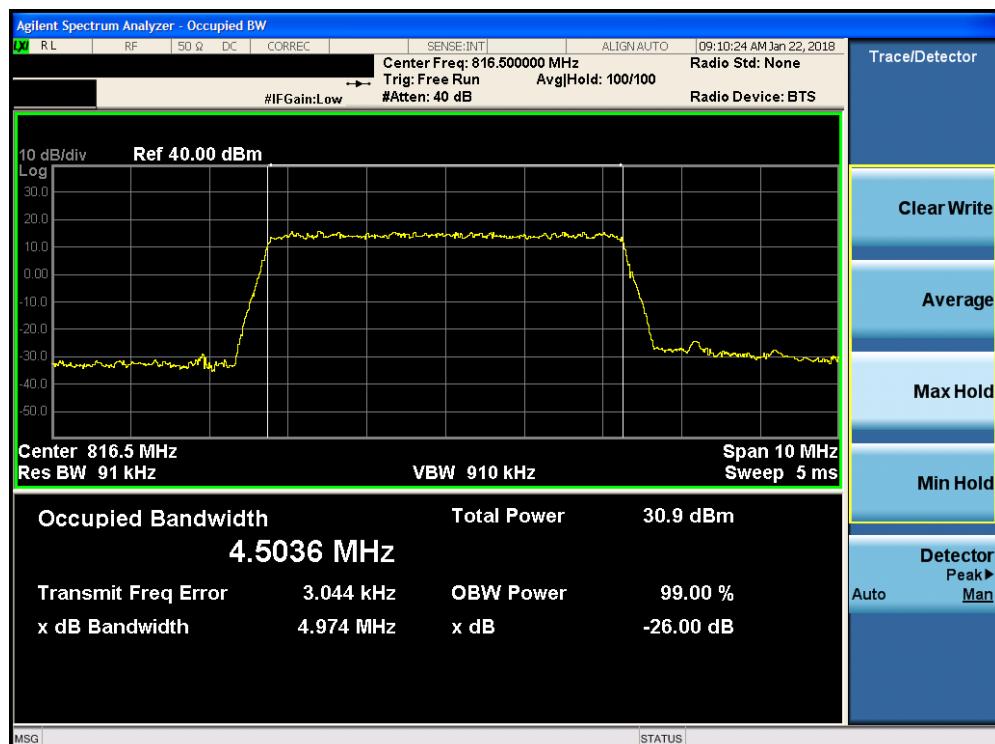

**Plot 7-8. Occupied Bandwidth Plot (5MHz 16-QAM – RB Size 25– Low Channel)**

FCC ID: BCGA1954	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device	Page 17 of 41



Plot 7-9. Occupied Bandwidth Plot (10MHz QPSK – RB Size 50)



Plot 7-10. Occupied Bandwidth Plot (10MHz 16-QAM – RB Size 50)

FCC ID: BCGA1954	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device	Page 18 of 41

## 7.3 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051 §90.691

### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

**The minimum permissible attenuation level of any spurious emission is  $43 + \log_{10}(P[\text{Watts}])$ , where P is the transmitter power in Watts.**

### Test Procedure Used

KDB 971168 D01 v03 – Section 6.0

### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. RBW  $\geq$  1MHz
3. VBW  $\geq$  3 x RBW
4. Detector = RMS
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 7-2. Test Instrument & Measurement Setup**


### Test Notes

Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for Part 90. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: BCGA1954	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device	Page 19 of 41

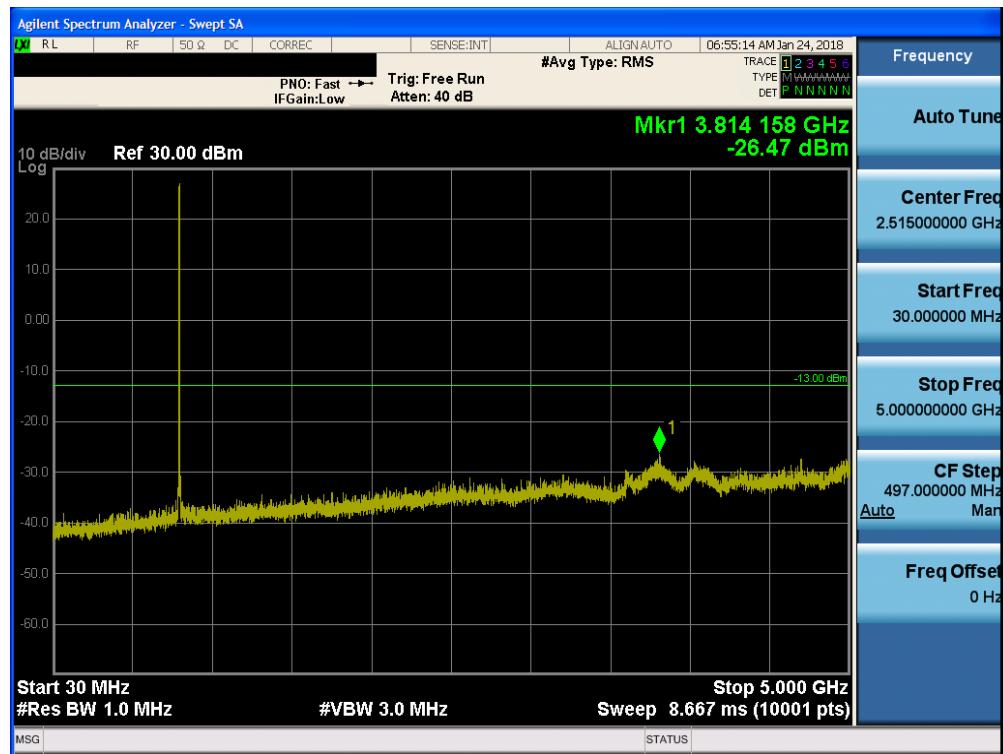


Plot 7-11. Conducted Spurious Plot (Ch. 450)

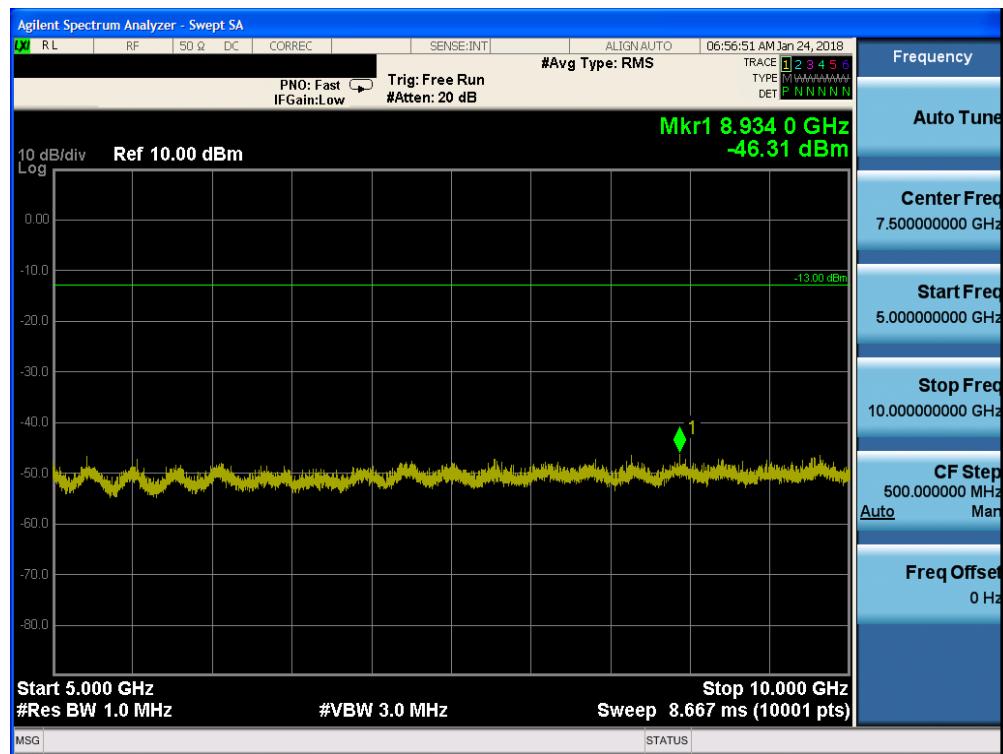


Plot 7-12. Conducted Spurious Plot (Ch. 450)

FCC ID: BCGA1954	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device	Page 20 of 41

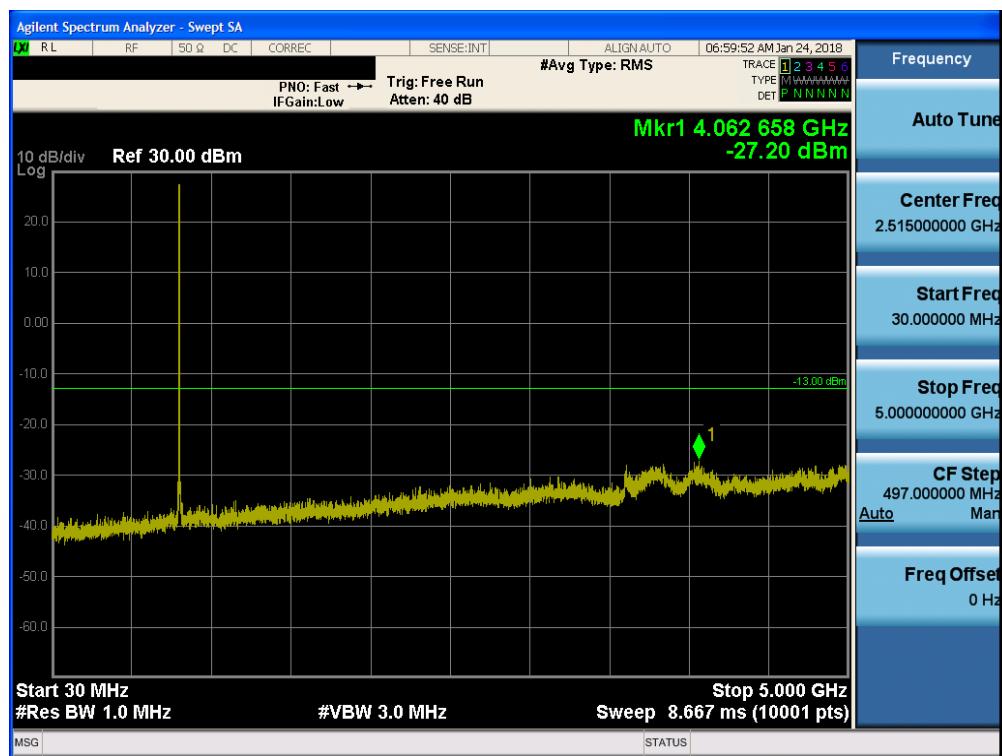

Plot 7-13. Conducted Spurious Plot (Ch. 670)

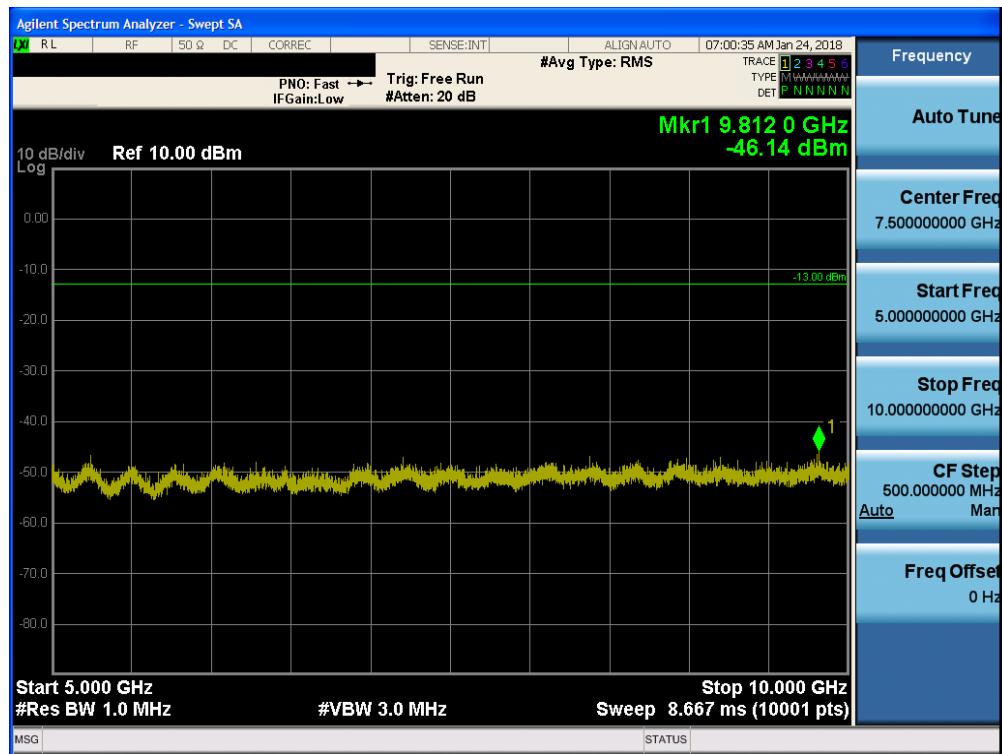


Plot 7-14. Conducted Spurious Plot (Ch. 670)

FCC ID: BCGA1954	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device		Page 21 of 41



Plot 7-15. Conducted Spurious Plot (3MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

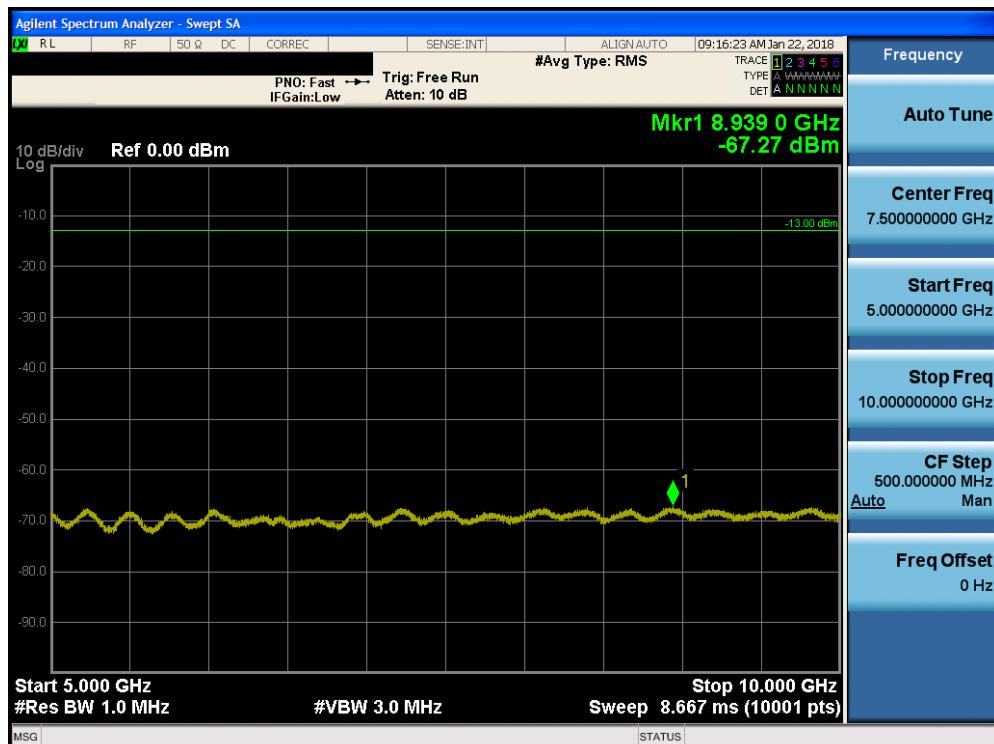


Plot 7-16. Conducted Spurious Plot (3MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: BCGA1954	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device		Page 22 of 41



Plot 7-17. Conducted Spurious Plot (3MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

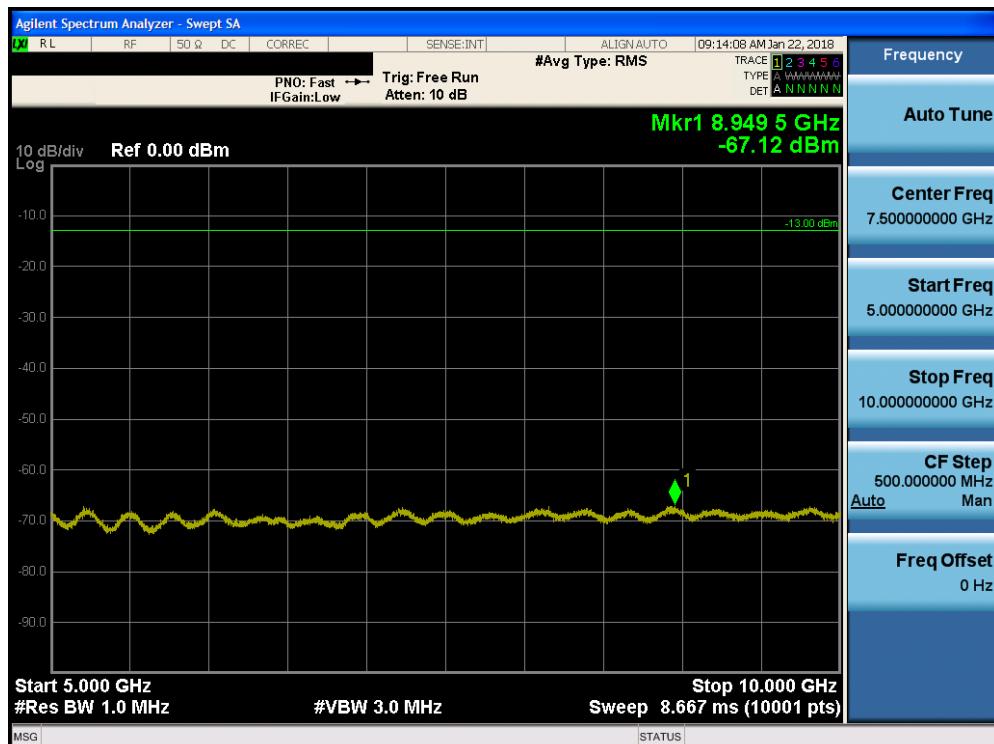

Plot 7-18. Conducted Spurious Plot (3MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: BCGA1954	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device		Page 23 of 41

## 7.4 Band Edge Emissions at Antenna Terminal

§2.1051 §90.691

### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

**The minimum permissible attenuation level of any spurious emission removed from the EA licensee's frequency block by greater than 37.5 kHz is  $43 + \log_{10}(P_{[\text{Watts}]})$ , where P is the transmitter power in Watts.**

**The minimum permissible attenuation level of any spurious emission removed from the EA licensee's frequency block by up to and including 37.5 kHz is  $50 + 10 \log_{10}(P_{[\text{Watts}]})$ , where P is the transmitter power in Watts.**

### Test Procedure Used


KDB 971168 D01 v03 – Section 6.0

### Test Settings

1. Span was set large enough so as to capture all out of band emissions near the band edge
2. RBW = 100 kHz
3. VBW = 300 kHz
4. Detector = RMS
5. Trace mode = trace average
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

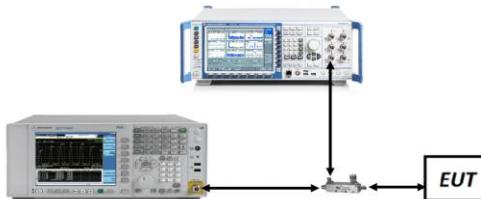


**Figure 7-3. Test Instrument & Measurement Setup**


### Test Notes

For channel edge emission, the signal analyzer's "ACP" measurement capability is used.

FCC ID: BCGA1954	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device	Page 24 of 41

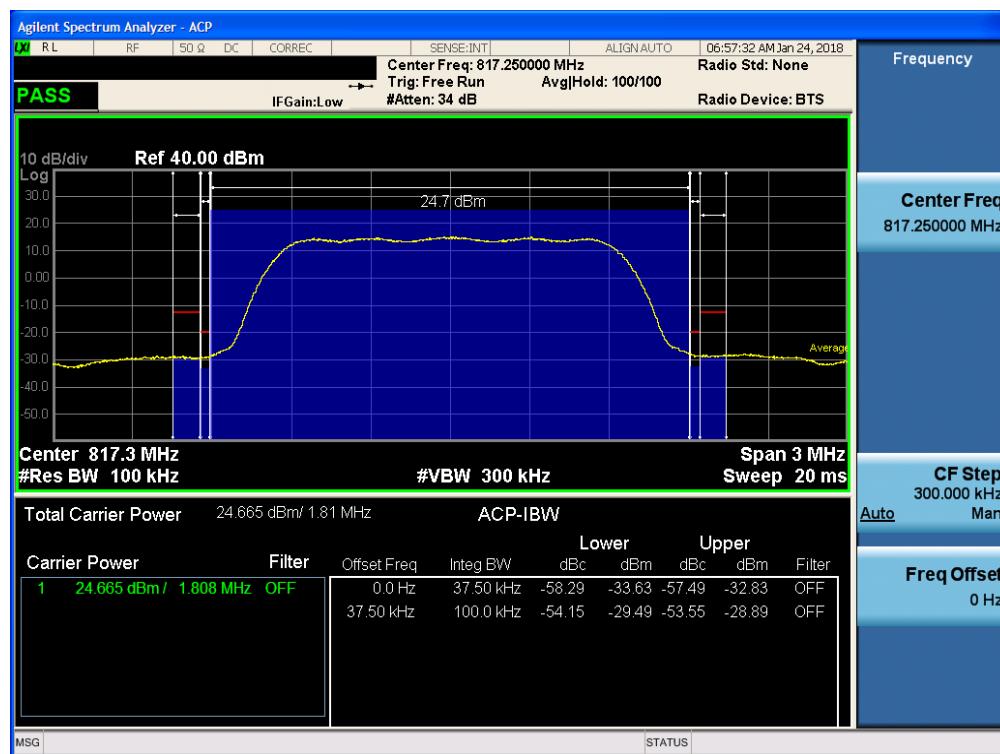


Plot 7-19. Channel Edge Plot (Ch. 450)

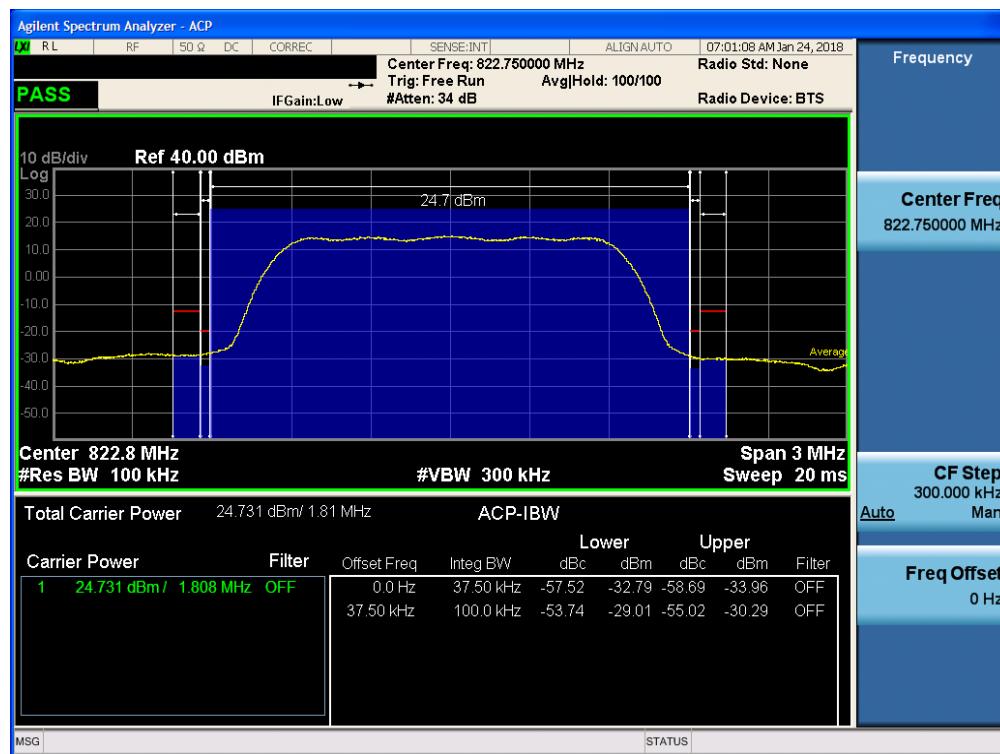


Plot 7-20. Channel Edge Plot (Ch. 670)

FCC ID: BCGA1954	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device	Page 25 of 41	

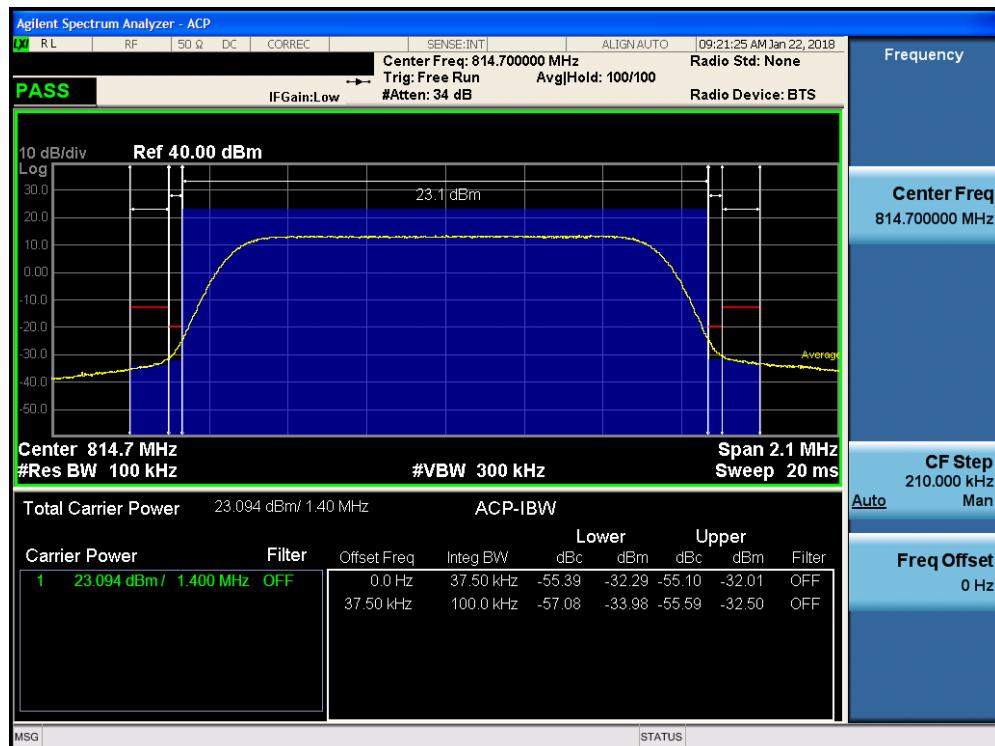


Plot 7-21. Channel Edge Plot (1.4MHz QPSK – RB Size 6– Low Channel)

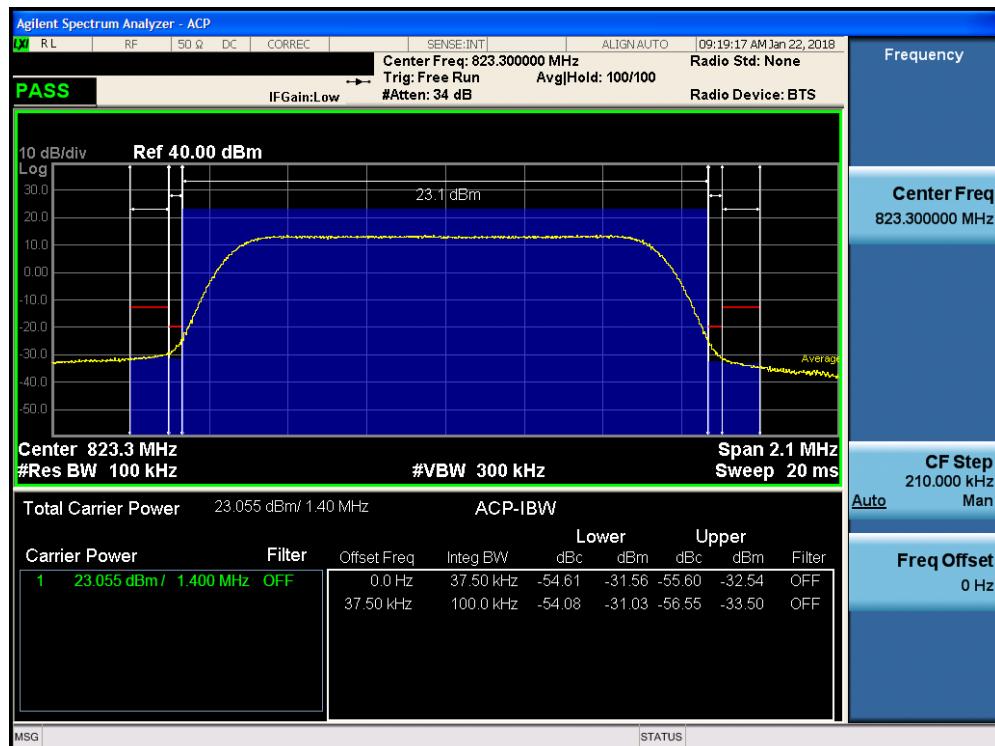


Plot 7-22. Channel Edge Plot (1.4MHz QPSK – RB Size 6 – High Channel)

FCC ID: BCGA1954	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device		

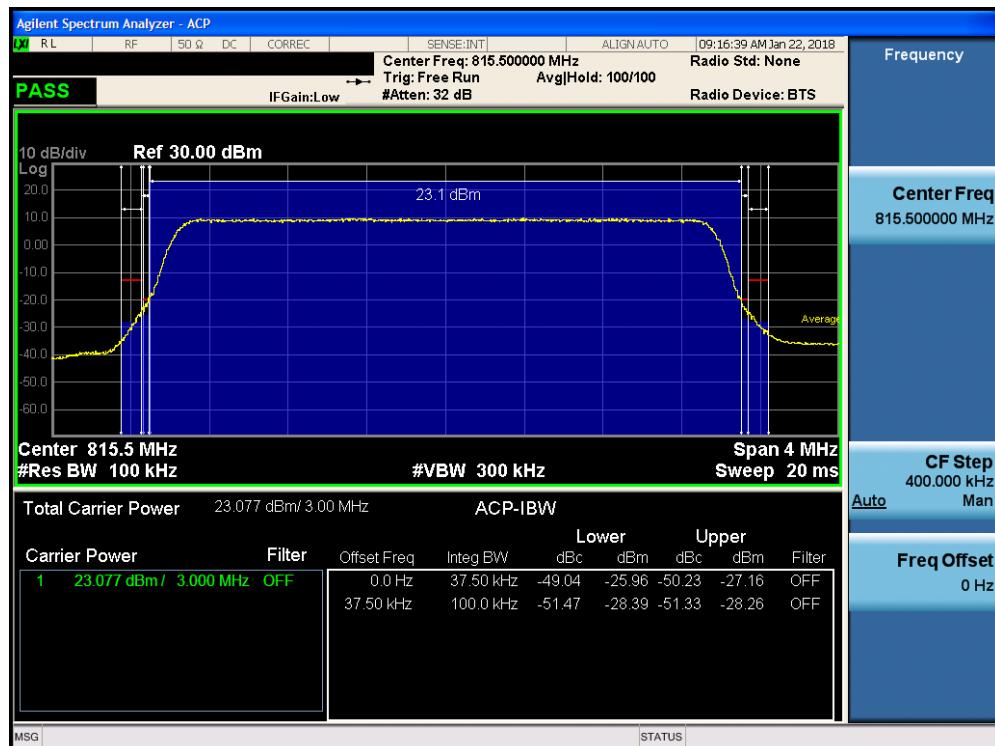


Plot 7-23. Channel Edge Plot (3MHz QPSK – RB Size 15– Low Channel)

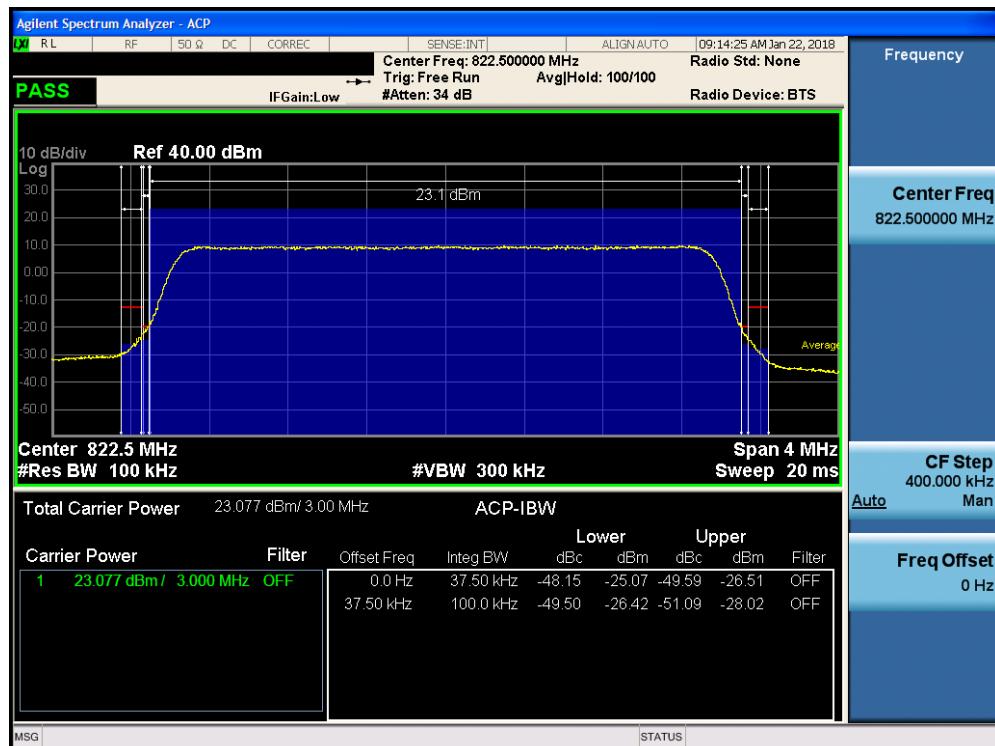


Plot 7-24. Channel Edge Plot (3MHz QPSK – RB Size 15 – High Channel)

FCC ID: BCGA1954	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device		

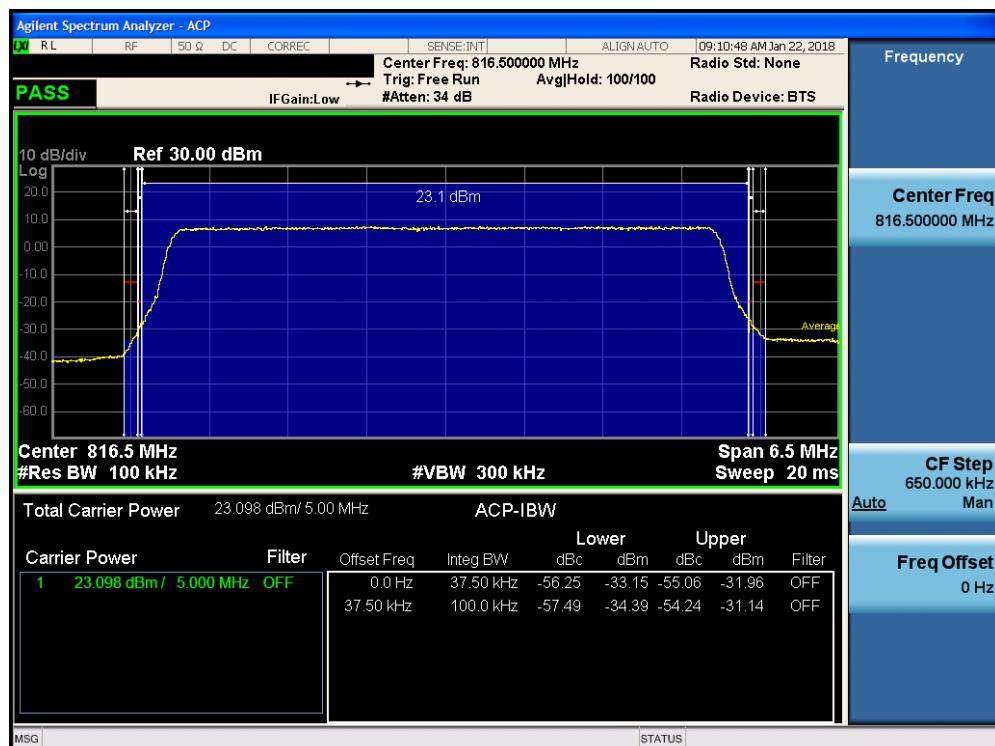


Plot 7-25. Channel Edge Plot (5MHz QPSK – RB Size 25– Low Channel)

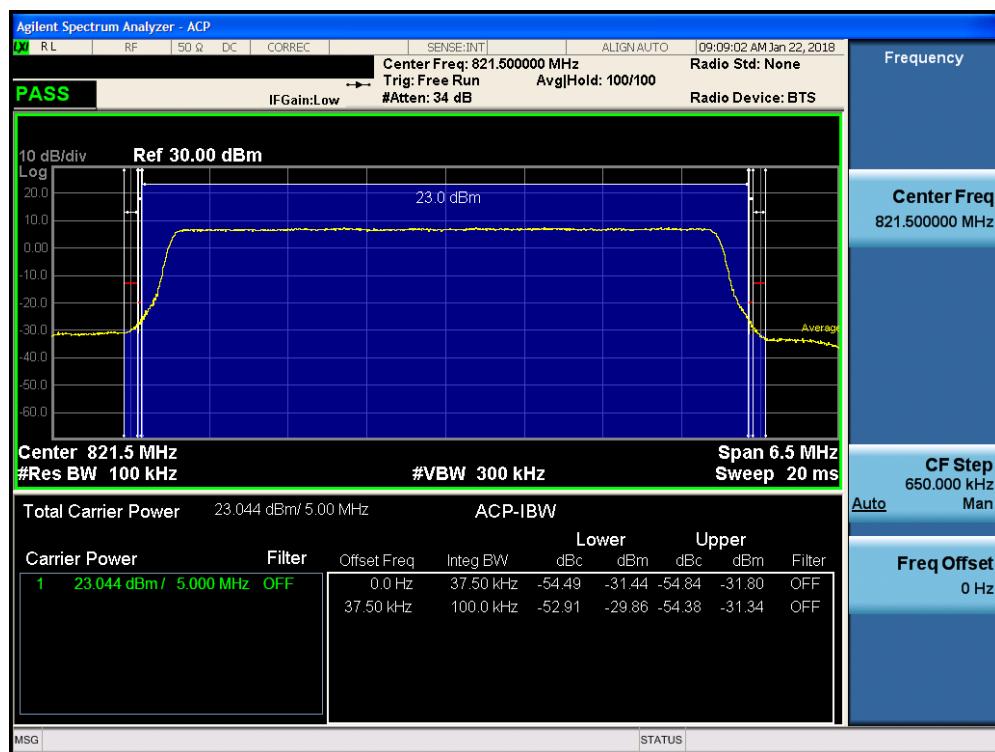

Plot 7-26. Channel Edge Plot (5MHz QPSK – RB Size 25 – High Channel)

FCC ID: BCGA1954	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device	Page 28 of 41	

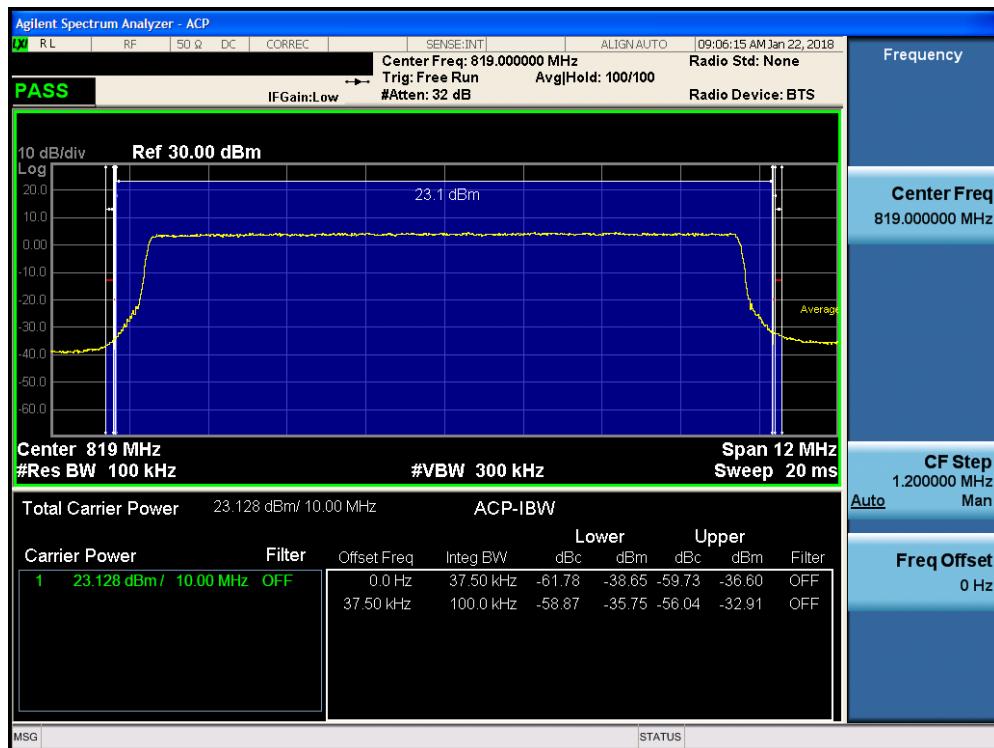

Plot 7-27. Channel Edge Plot (10MHz QPSK – RB Size 50)

FCC ID: BCGA1954	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device		Page 29 of 41

## 7.5 Conducted Power Output Data

[\\$90.635](#)

### Test Overview

Conducted power measurements are performed to measure the average output power of the EUT. The averaging is to be performed only over duration of active transmissions at maximum output power level. The average measurements do not include averaging over periods when the transmitter is quiescent or when operating at reduced power level.

### Test Procedure Used

KDB 971168 D01 v03

### Test Setup

The EUT and measurement equipment were setup as shown in the diagram below.



**Figure 7-4. Conducted Power Measurement Set Up**

### Test Notes

1. The EUT was tested in all possible test configurations. The worst case emissions are reported with the EUT modulations and channel bandwidth configurations shown in the table below.
2. This unit was tested with its standard battery.

FCC ID: BCGA1954	PCTEST® ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device		Page 30 of 41

Frequency [MHz]	BC10 [Channel]	Battery Type	Cond. PWR [dBm]	Cond. PWR [Watts]	Cond. PWR Limit [dBm]	Margin [dB]
817.25	450	Standard	24.80	0.302	50.00	-25.20
822.75	670	Standard	24.80	0.302	50.00	-25.20

**Table 7-2. CDMA BC10 Conducted Power Output Data**

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Cond. PWR [dBm]	Cond. PWR [Watts]	Cond. PWR Limit [dBm]	Margin [dB]
814.70	1.4	QPSK	24.44	0.278	50.00	-25.56
823.30	1.4	QPSK	24.40	0.275	50.00	-25.60
814.70	1.4	16-QAM	23.45	0.221	50.00	-26.55
823.30	1.4	16-QAM	23.50	0.224	50.00	-26.50
815.50	3	QPSK	24.49	0.281	50.00	-25.51
822.50	3	QPSK	24.27	0.267	50.00	-25.73
815.50	3	16-QAM	23.44	0.221	50.00	-26.56
822.50	3	16-QAM	23.52	0.225	50.00	-26.48
816.50	5	QPSK	24.46	0.279	50.00	-25.54
821.50	5	QPSK	24.45	0.279	50.00	-25.55
816.50	5	16-QAM	23.50	0.224	50.00	-26.50
821.50	5	16-QAM	23.55	0.226	50.00	-26.45
819.00	10	QPSK	24.49	0.281	50.00	-25.51
819.00	10	16-QAM	23.76	0.238	50.00	-26.24

**Table 7-3. LTE Band 26 Conducted Power Output Data**

FCC ID: BCGA1954	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device		

## 7.6 Radiated Spurious Emissions Measurements

§2.1053 §90.691

### Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v03 – Section 5.8

ANSI/TIA-603-D-2010 – Section 2.2.12


### Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq 2 \times$  span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: BCGA1954	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device	Page 32 of 41

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

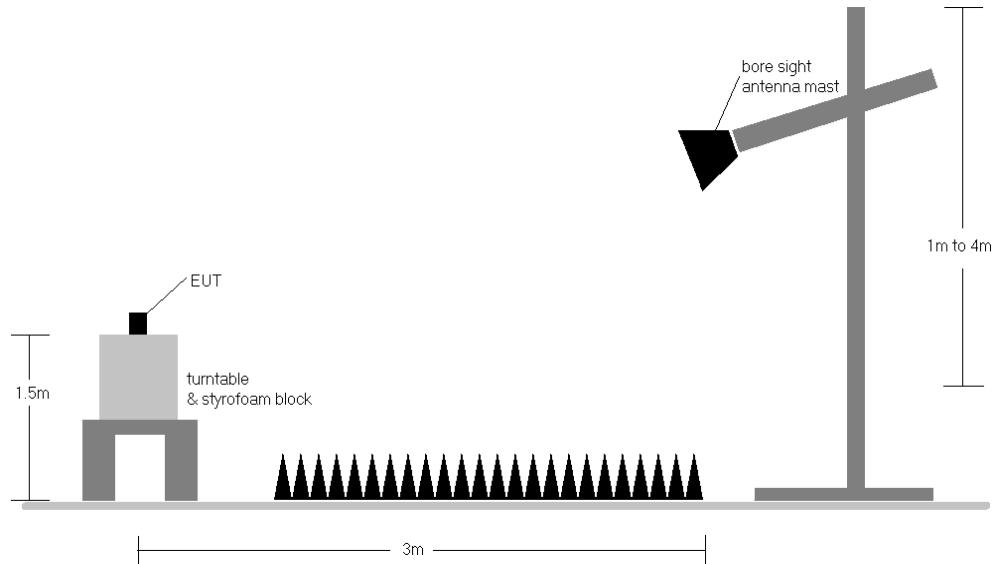

**Figure 7-5. Test Instrument & Measurement Setup**

## Test Notes

1. For LTE mode, the device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1 RB.
2. This device employs CDMA/EvDO capabilities. This device is tested under all RC and SO combinations and the worst case is reported with RC3/SO55 with "All Up" power control bits.
3. This unit was tested with its standard battery.
4. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
5. The " - " shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: BCGA1954	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device	Page 33 of 41

OPERATING FREQUENCY: 817.25 MHz  
 CHANNEL: 450  
 MODULATION SIGNAL: CDMA  
 DISTANCE: 3 meters  
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1634.50	V	-	-	-74.15	8.45	-65.69	-52.7
2451.75	V	150	29	-63.98	3.92	-60.06	-47.1
3269.00	V	-	-	-64.58	4.16	-60.41	-47.4
4086.25	V	-	-	-67.93	9.17	-58.76	-45.8

Table 7-4. CDMA BC10 Radiated Spurious Data (Ch. 450)

OPERATING FREQUENCY: 822.75 MHz  
 CHANNEL: 670  
 MODULATION SIGNAL: CDMA  
 DISTANCE: 3 meters  
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1645.50	V	-	-	-74.10	8.54	-65.57	-52.6
2468.25	V	150	12	-65.01	3.92	-61.09	-48.1
3291.00	V	-	-	-64.44	4.14	-60.30	-47.3
4113.75	V	-	-	-66.35	7.05	-59.30	-46.3

Table 7-5. CDMA BC10 Radiated Spurious Data (Ch. 670)

FCC ID: BCGA1954	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device	Page 34 of 41	

OPERATING FREQUENCY: 814.70 MHz  
 CHANNEL: 26697  
 BANDWIDTH: 1.4 MHz  
 DISTANCE: 3 meters  
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1629.40	V	221	73	-72.78	8.40	-64.38	-51.4
2444.10	V	-	-	-67.77	3.80	-63.97	-51.0
3258.80	V	-	-	-67.81	4.18	-63.63	-50.6

Table 7-6. Radiated Spurious Data (Ch. 26697)

OPERATING FREQUENCY: 823.30 MHz  
 CHANNEL: 26783  
 BANDWIDTH: 1.4 MHz  
 DISTANCE: 3 meters  
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1646.60	V	340	179	-70.53	8.54	-61.99	-49.0
2469.90	V	-	-	-67.60	3.92	-63.67	-50.7
3293.20	V	-	-	-67.83	4.14	-63.69	-50.7

Table 7-7. Radiated Spurious Data (Ch. 26783)

FCC ID: BCGA1954	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device		

## 7.7 Frequency Stability / Temperature Variation

§2.1055 §90.213

### Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-D-2010. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

**The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency.**

### Test Procedure Used

ANSI/TIA-603-D-2010

### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

### Test Notes

None

FCC ID: BCGA1954	 <b>MEASUREMENT REPORT</b> (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device	Page 36 of 41

## Frequency Stability / Temperature Variation

§2.1055, §90.213

OPERATING FREQUENCY: 817,250,000 Hz  
 CHANNEL: 450  
 REFERENCE VOLTAGE: 3.80 VDC  
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	817,249,997	-3.00	-0.0000004
100 %		- 30	817,250,008	7.50	0.0000009
100 %		- 20	817,250,008	7.78	0.0000010
100 %		- 10	817,250,006	6.00	0.0000007
100 %		0	817,250,006	6.15	0.0000008
100 %		+ 10	817,250,005	5.00	0.0000006
100 %		+ 20	817,249,995	-4.80	-0.0000006
100 %		+ 30	817,249,994	-6.00	-0.0000007
100 %		+ 40	817,249,995	-4.98	-0.0000006
100 %		+ 50	817,249,994	-5.93	-0.0000007
BATT. ENDPOINT	3.19	+ 20	817,249,995	-4.93	-0.0000006

Table 7-8. CDMA BC10 Frequency Stability Data (Ch. 450)

FCC ID: BCGA1954	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device	Page 37 of 41	

## Frequency Stability / Temperature Variation

§2.1055, §90.213

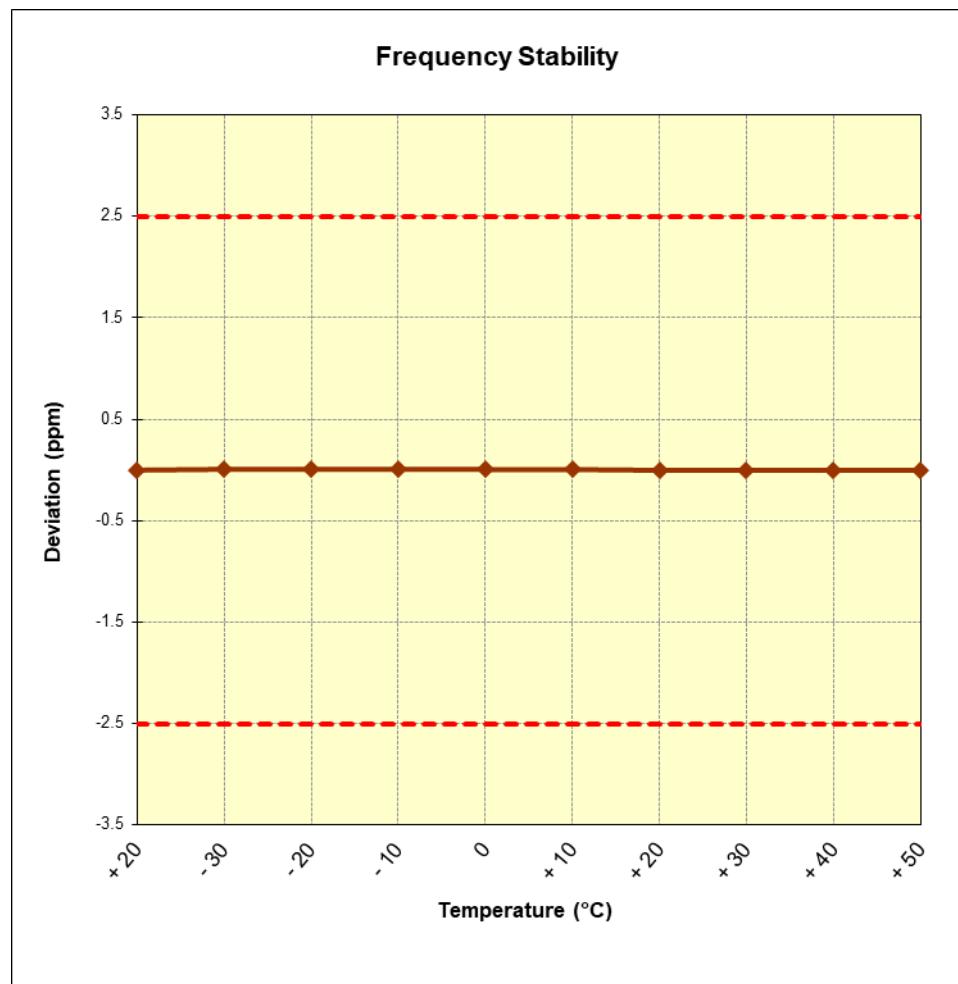


Figure 7-6. CDMA BC10 Frequency Stability Graph (Ch. 450)

FCC ID: BCGA1954	PCTEST Engineering Laboratory, Inc.		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device		Page 38 of 41

## Frequency Stability / Temperature Variation

§2.1055, §90.213

OPERATING FREQUENCY: 819,000,000 Hz  
 CHANNEL: 26740  
 REFERENCE VOLTAGE: 3.80 VDC  
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm


VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	818,999,996	-3.93	-0.0000005
100 %		- 30	819,000,004	4.31	0.0000005
100 %		- 20	818,999,992	-8.30	-0.0000010
100 %		- 10	819,000,004	3.95	0.0000005
100 %		0	819,000,004	4.03	0.0000005
100 %		+ 10	818,999,994	-5.79	-0.0000007
100 %		+ 20	819,000,005	4.95	0.0000006
100 %		+ 30	819,000,005	5.23	0.0000006
100 %		+ 40	818,999,995	-5.07	-0.0000006
100 %		+ 50	818,999,996	-4.13	-0.0000005
BATT. ENDPOINT	3.19	+ 20	818,999,996	-4.26	-0.0000005

Table 7-9. LTE Band 26 Frequency Stability Data (Ch. 26740)

FCC ID: BCGA1954	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device	Page 39 of 41	

## Frequency Stability / Temperature Variation

§2.1055, §90.213

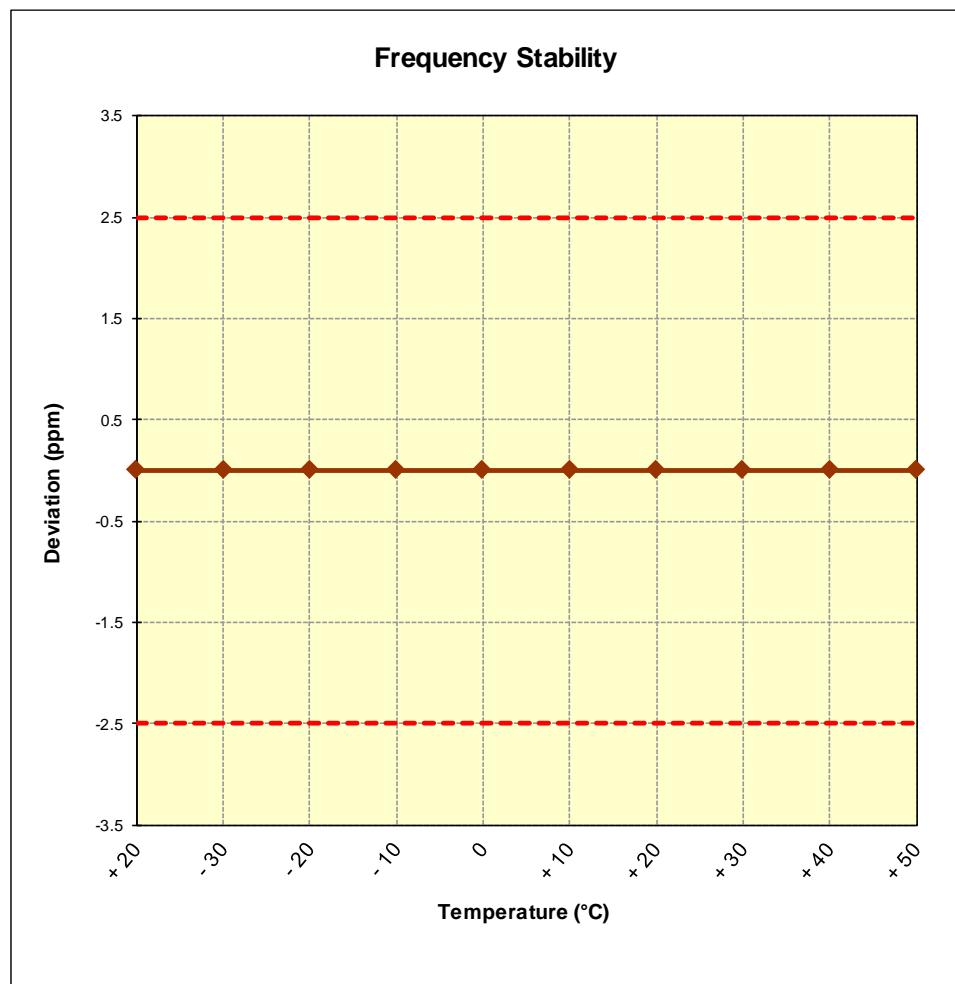

**Table 7-10. LTE Band 26 Frequency Stability Data (Ch. 26740)**

FCC ID: BCGA1954	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device	Page 40 of 41

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Apple Tablet Device** **FCC ID: BCGA1954** complies with all the requirements of Part 90 of the FCC rules.

FCC ID: BCGA1954	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1710060006-04-R2.BCG	Test Dates: 10/31/2017-2/15/2018	EUT Type: Tablet Device	Page 41 of 41