



TEST REPORT

Test Report No. : UL-RPT-RP12173937JD12A V2.0

Customer : Apple Inc.

Model No. / HVIN : A1989

PMN : MacBook Pro

FCC ID : BCGA1989

ISED Certification No. : IC: 579C-A1989

Technologies : *Bluetooth* – Low Energy;
Bluetooth – BR/EDR;
2.4 GHz WLAN & 5 GHz WLAN

Test Standard(s) : FCC Parts 15.33, 15.205(a), 15.209(a), 15.247(d) & 15.407(b)
ISED Canada RSS-247 5.5, 6.2.1.2, 6.2.4.2 &
RSS-Gen 6.13, 8.9 & 8.10

Test Laboratory : UL VS LTD, Basingstoke, Hampshire, RG24 8AH, United Kingdom

1. This test report shall not be reproduced in full or partial, without the written approval of UL VS LTD.
2. The results in this report apply only to the sample(s) tested.
3. The sample tested is in compliance with the above standard(s).
4. The test results in this report are traceable to the national or international standards.
5. Version 2.0 supersedes all previous versions.

Date of Issue: 28 June 2018

Checked by:

Ben Mercer
Senior Test Engineer, Radio Laboratory

Company Signatory:

Sarah Williams
Senior Test Engineer, Radio Laboratory
UL VS LTD



The *Bluetooth*® word mark and logos are owned by the *Bluetooth* SIG, Inc. and any use of such marks by UL VS LTD is under licence. Other trademarks and trade names are those of their respective owners.

Customer Information

Company Name:	Apple Inc.
Address:	One Apple Park Way Cupertino, California 95014 U.S.A.
Contact Name:	Stuart Thomas

Report Revision History

Version Number	Issue Date	Revision Details	Revised By
1.0	20/06/2018	Initial Version	Ben Mercer
2.0	28/06/2018	Corrected test dates in Section 1.2. Corrected calibration due date for asset M1273 in Section 2.4 Corrected test dates throughout Section 4.	Ben Mercer

Table of Contents

Customer Information.....	2
Report Revision History	2
Table of Contents.....	3
1. Attestation of Test Results.....	5
1.1. Description of EUT	5
1.2. General Information	5
1.3. Summary of Test Results	6
1.4. Deviations from the Test Specification	7
2. Summary of Testing.....	8
2.1. Facilities and Accreditation	8
2.2. Methods and Procedures	8
2.3. Calibration and Uncertainty	9
2.4. Test and Measurement Equipment	10
3. Equipment Under Test (EUT)	11
3.1. Identification of Equipment Under Test (EUT)	11
Modifications Incorporated in the EUT	11
3.2. Additional Information Related to Testing	12
3.3. Description of Available Antennas	13
3.4. Description of Test Setup	14
4. Radiated Test Results.....	18
4.1. Transmitter Out of Band Radiated Emissions - Bluetooth Basic Rate bottom channel / 5 GHz WLAN (SISO) top channel	18
4.2. Transmitter Out of Band Radiated Emissions - Bluetooth Basic Rate top channel / 5 GHz WLAN (SISO) bottom channel	22
4.3. Transmitter Out of Band Radiated Emissions - Bluetooth LE bottom channel / 5 GHz WLAN (SISO) top channel	26
4.4. Transmitter Out of Band Radiated Emissions - Bluetooth LE top channel / 5 GHz WLAN (SISO) bottom channel	30
4.5. Transmitter Out of Band Radiated Emissions - 2.4 GHz WLAN (MIMO) bottom channel / 5 GHz WLAN (SISO) top channel	34
4.6. Transmitter Out of Band Radiated Emissions - 2.4 GHz WLAN (MIMO) top channel / 5 GHz WLAN (SISO) top channel	38
4.7. Transmitter Out of Band Radiated Emissions - Bluetooth Basic Rate bottom channel / 2.4 GHz WLAN (MIMO) top channel	42
4.8. Transmitter Out of Band Radiated Emissions - Bluetooth Basic Rate top channel / 2.4 GHz WLAN (MIMO) bottom channel	45
4.9. Transmitter Out of Band Radiated Emissions - Bluetooth LE bottom channel / 2.4 GHz WLAN (MIMO) top channel	48
4.10. Transmitter Out of Band Radiated Emissions - Bluetooth LE top channel / 2.4 GHz WLAN (MIMO) bottom channel	51
4.11. Transmitter Out of Band Radiated Emissions - Bluetooth Basic Rate bottom channel / 2.4 GHz WLAN (MIMO) top channel / 5 GHz WLAN (SISO) bottom channel	54
4.12. Transmitter Out of Band Radiated Emissions - Bluetooth Basic Rate bottom channel / 2.4 GHz WLAN (MIMO) top channel / 5 GHz WLAN (SISO) top channel	58
4.13. Transmitter Out of Band Radiated Emissions - Bluetooth Basic Rate top channel / 2.4 GHz WLAN (MIMO) bottom channel / 5 GHz WLAN (SISO) bottom channel	62

4.14. Transmitter Out of Band Radiated Emissions - Bluetooth Basic Rate top channel / 2.4 GHz WLAN (MIMO) bottom channel / 5 GHz WLAN (SISO) top channel	66
4.15. Transmitter Out of Band Radiated Emissions - Bluetooth LE bottom channel / 2.4 GHz WLAN (MIMO) top channel / 5 GHz WLAN (SISO) bottom channel	70
4.16. Transmitter Out of Band Radiated Emissions - Bluetooth LE bottom channel / 2.4 GHz WLAN (MIMO) top channel / 5 GHz WLAN (SISO) top channel	74
4.17. Transmitter Out of Band Radiated Emissions - Bluetooth LE top channel / 2.4 GHz WLAN (MIMO) bottom channel / 5 GHz WLAN (SISO) bottom channel	78
4.18. Transmitter Out of Band Radiated Emissions - Bluetooth LE top channel / 2.4 GHz WLAN (MIMO) bottom channel / 5 GHz WLAN (SISO) top channel	82
4.19. Transmitter Out of Band Radiated Emissions - 2.4 GHz WLAN (SISO) bottom channel / 5 GHz WLAN (MIMO) top channel	86
4.20. Transmitter Out of Band Radiated Emissions - 2.4 GHz WLAN (SISO) top channel / 5 GHz WLAN (MIMO) top channel	90
4.21. Transmitter Out of Band Radiated Emissions - Bluetooth Basic Rate bottom channel / 2.4 GHz WLAN (SISO) top channel / 5 GHz WLAN (MIMO) bottom channel	94
4.22. Transmitter Out of Band Radiated Emissions - Bluetooth Basic Rate bottom channel / 2.4 GHz WLAN (SISO) top channel / 5 GHz WLAN (MIMO) top channel	98
4.23. Transmitter Out of Band Radiated Emissions - Bluetooth Basic Rate top channel / 2.4 GHz WLAN (SISO) bottom channel / 5 GHz WLAN (MIMO) bottom channel	102
4.24. Transmitter Out of Band Radiated Emissions - Bluetooth Basic Rate top channel / 2.4 GHz WLAN (SISO) bottom channel / 5 GHz WLAN (MIMO) top channel	106
4.25. Transmitter Out of Band Radiated Emissions - Bluetooth LE bottom channel / 2.4 GHz WLAN (SISO) top channel / 5 GHz WLAN (MIMO) bottom channel	110
4.26. Transmitter Out of Band Radiated Emissions - Bluetooth LE bottom channel / 2.4 GHz WLAN (SISO) top channel / 5 GHz WLAN (MIMO) top channel	114
4.27. Transmitter Out of Band Radiated Emissions - Bluetooth LE top channel / 2.4 GHz WLAN (SISO) bottom channel / 5 GHz WLAN (MIMO) bottom channel	118
4.28. Transmitter Out of Band Radiated Emissions - Bluetooth LE top channel / 2.4 GHz WLAN (SISO) bottom channel / 5 GHz WLAN (MIMO) top channel	122

1. Attestation of Test Results

1.1. Description of EUT

The EUT was a Laptop Computer with WLAN and *Bluetooth*.

1.2. General Information

Specification Reference:	47CFR15.247
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) - Section 15.247
Specification Reference:	47CFR15.209
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) - Section 15.209
Specification Reference:	47CFR15.407
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart E (Unlicensed National Information Infrastructure Devices) – Sections 15.407
Specification Reference:	RSS-Gen Issue 4 November 2014
Specification Title:	General Requirements for Compliance of Radio Apparatus
Specification Reference:	RSS-247 Issue 2 February 2017
Specification Title:	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
Test Dates:	24 April 2018 to 19 May 2018

1.3. Summary of Test Results

FCC Reference (47CFR)	ISED Canada Reference	Measurement	Result
Bluetooth Basic Rate & 5 GHz WLAN (SISO)			
15.209(a)/15.247(d) /15.407(b)	RSS-Gen 6.13 / RSS-247 5.5, 6.2.1.2, & 6.2.4.2	Transmitter Out of Band Radiated Emissions	Complied
Bluetooth LE & 5 GHz WLAN (SISO)			
15.209(a)/15.247(d) /15.407(b)	RSS-Gen 6.13 / RSS-247 5.5, 6.2.1.2, & 6.2.4.2	Transmitter Out of Band Radiated Emissions	Complied
2.4 GHz WLAN (MIMO) & 5 GHz WLAN (SISO)			
15.209(a)/15.247(d) /15.407(b)	RSS-Gen 6.13 / RSS-247 5.5, 6.2.1.2, & 6.2.4.2	Transmitter Out of Band Radiated Emissions	Complied
Bluetooth Basic Rate & 2.4 GHz WLAN (MIMO)			
15.209(a)/15.247(d)	RSS-Gen 6.13 / RSS-247 5.5	Transmitter Out of Band Radiated Emissions	Complied
Bluetooth LE & 2.4 GHz WLAN (MIMO)			
15.209(a)/15.247(d)	RSS-Gen 6.13 / RSS-247 5.5	Transmitter Out of Band Radiated Emissions	Complied
Bluetooth Basic Rate & 2.4 GHz WLAN (MIMO) & 5 GHz WLAN (SISO)			
15.209(a)/15.247(d) /15.407(b)	RSS-Gen 6.13 / RSS-247 5.5, 6.2.1.2, & 6.2.4.2	Transmitter Out of Band Radiated Emissions	Complied
Bluetooth LE & 2.4 GHz WLAN (MIMO) & 5 GHz WLAN (SISO)			
15.209(a)/15.247(d) /15.407(b)	RSS-Gen 6.13 / RSS-247 5.5, 6.2.1.2, & 6.2.4.2	Transmitter Out of Band Radiated Emissions	Complied
2.4 GHz WLAN (SISO) & 5 GHz WLAN (MIMO)			
15.209(a)/15.247(d) /15.407(b)	RSS-Gen 6.13 / RSS-247 5.5, 6.2.1.2, & 6.2.4.2	Transmitter Out of Band Radiated Emissions	Complied
Bluetooth Basic Rate & 2.4 GHz WLAN (SISO) & 5 GHz WLAN (MIMO)			
15.209(a)/15.247(d) /15.407(b)	RSS-Gen 6.13 / RSS-247 5.5, 6.2.1.2, & 6.2.4.2	Transmitter Out of Band Radiated Emissions	Complied
Bluetooth LE & 2.4 GHz WLAN (SISO) & 5 GHz WLAN (MIMO)			
15.209(a)/15.247(d) /15.407(b)	RSS-Gen 6.13 / RSS-247 5.5, 6.2.1.2, & 6.2.4.2	Transmitter Out of Band Radiated Emissions	Complied

Note(s):

1. There are two vendors of the WiFi/*Bluetooth* radio modules, Vendor 1 and Vendor 2.
2. The WiFi/*Bluetooth* radio modules have the same mechanical outline (i.e. the same packaging dimension and pin layout), use the same on-board antenna matching circuit, have an identical antenna structure and are built and tested to conform to the same specification and to operate within the same tolerances.

Baseline testing was performed on the two vendors to determine worst case.

3. The EUT supports Simultaneous-In-Band (SIB) and Simultaneous-Dual-Band (SDB) transmission. Testing was performed to verify compliance of radiated spurious emissions against applicable limits when the EUT was simultaneously transmitting in the 2.4 GHz and 5 GHz bands. Only radiated spurious emissions related to intermodulation products are recorded in this test report. The highest out-of-band noise floor levels were recorded if no intermodulation products were observed across the required measurement ranges.

1.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

2. Summary of Testing

2.1. Facilities and Accreditation

The test site and measurement facilities used to collect data are located at Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, United Kingdom. The following table identifies which facilities were utilised for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

Site 1	X
Site 2	X
Site 17	X

UL VS LTD is accredited by UKAS. The tests reported herein have been performed in accordance with its terms of accreditation.

2.2. Methods and Procedures

Reference:	ANSI C63.10-2013
Title:	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
Reference:	KDB 558074 D01 DTS Meas Guidance v04 April 5, 2017
Title:	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under Section 15.247
Reference:	KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 December 14, 2017
Title:	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices (Part 15, Subpart E)

2.3. Calibration and Uncertainty

Measuring Instrument Calibration

In accordance with UKAS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value measured (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
Radiated Spurious Emissions	30 MHz to 1 GHz	95%	±4.65 dB
Radiated Spurious Emissions	1 GHz to 40 GHz	95%	±2.94 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

2.4. Test and Measurement Equipment

Test Equipment Used for Transmitter Radiated Emissions Tests

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
K0001	5m RSE Chamber	Rainford EMC	N/A	N/A	12 Mar 2019	12
M1273	Test Receiver	Rohde & Schwarz	ESIB26	100275	18 Jun 2018	12
G0453	Pre-amplifier	Sonoma	310N	230801	15 Jun 2018	12
A1834	Attenuator	Hewlett Packard	8491B	10444	14 Mar 2019	12
M2009	Thermohygrometer	Testo	608-H1	45046699	20 Jun 2018	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	07 Feb 2019	12
M2016	Thermohygrometer	Testo	608-H1	45046428	26 Feb 2019	12
M1630	Test Receiver	Rohde & Schwarz	ESU40	100233	03 Aug 2018	12
M1995	Test Receiver	Rohde & Schwarz	ESU40	100428	18 Apr 2019	12
M1874	Test Receiver	Rohde & Schwarz	ESU26	100553	28 Nov 2018	12
A2948	Pre Amplifier	Com-Power Corp	PAM-118A	551087	06 Apr 2019	12
A3025	Pre Amplifier	Com-Power Corp	PAM-118A	551126	12 Oct 2018	12
A2896	Pre Amplifier	Schwarzbeck	BBV 9721	9721-023	20 Feb 2019	12
A1818	Antenna	EMCO	3115	00075692	07 Feb 2019	12
A253	Antenna	Flann Microwave	128	12240-20	07 Feb 2019	12
A254	Antenna	Flann Microwave	139	14240-20	07 Feb 2019	12
A255	Antenna	Flann Microwave	519	16240-20	07 Feb 2019	12
A256	Antenna	Flann Microwave	400	18240-20	07 Feb 2019	12
A2895	Antenna	Schwarzbeck	BBHA 9170	9170-728	20 Feb 2019	12
A2141	Attenuator	AtlanTecRF	AN18-10	090918-04	08 Mar 2019	12
A2142	Attenuator	AtlanTecRF	AN18-20	081120-23	26 Feb 2019	12
A3009	Attenuator	AtlanTecRF	AN18-06	208801#4	09 Mar 2019	12
A2130	High Pass Filter	AtlanTecRF	AFH-08000	80rJFBD06-002	21 Feb 2019	12
A2974	High Pass Filter	AtlanTecRF	AFH-06000	15032501232	21 Feb 2019	12
A2973	High Pass Filter	AtlanTecRF	AFH-03000	16080900032	24 Jan 2019	12
A2176	High Pass Filter	AtlanTecRF	AFH-07000	800980	21 Feb 2019	12
A2133	Low Pass Filter	AtlanTecRF	AFL-04000	JFB1006-002	21 Feb 2019	12
K0017	3m RSE Chamber	Rainford	N/A	N/A	21 Feb 2019	12
M2003	Thermohygrometer	Testo	608-H1	45046428	27 Feb 2019	12
A2943	Attenuator	AtlanTecRF	AN18W5-06	208147#2	22 Feb 2019	12
A2915	Low pass filter	AtlanTecRF	AFL-04000	2156	22 Feb 2019	12
A2914	High Pass Filter	AtlanTecRF	AFH-03000	2155	22 Feb 2019	12
A2916	Attenuator	AtlanTecRF	AN18W5-10	832827	22 Feb 2019	12

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	Apple
PMN:	MacBook Pro
Model No. / HVIN:	A1989
Test Sample Serial Number:	C02VR00RJH93 (<i>Radiated sample #1</i>)
Hardware Version:	EVT
Software Version:	17G2014
FCC ID:	BCGA1989
ISED Certification Number:	IC: 579C-A1989

Brand Name:	Apple
PMN:	MacBook Pro
Model No. / HVIN:	A1989
Test Sample Serial Number:	C02W6002JTDV (<i>Radiated sample #2</i>)
Hardware Version:	EVT
Software Version:	17G2014
FCC ID:	BCGA1989
ISED Certification Number:	IC: 579C-A1989

3.2. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.3. Additional Information Related to Testing

Technology Tested:	<i>Bluetooth</i> Low Energy (Digital Transmission System)		
Type of Unit:	Transceiver		
Channel Spacing:	2 MHz		
Transmit Frequency Range:	2400 MHz to 2483.5 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	37	2402
	Top	39	2480

Tested Technology:	<i>Bluetooth</i> (FHSS)		
Mode:	Basic Rate		
Modulation:	GFSK		
Packet Type: (Maximum Payload)	DH5		
Data Rate (Mbps):	1		
Transmit Frequency Range:	2400 MHz to 2483.5 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	0	2402
	Top	78	2480

Technology Tested:	WLAN (IEEE 802.11b/g/n) / Digital Transmission System		
Channel Spacing:	20 MHz		
Modulation:	BPSK		
Data Rate:	802.11n HT20 (SISO)	MCS0	
	802.11n HT20 (MIMO)	MCS0 with CDD	
Transmit Frequency Range:	2400 MHz to 2483.5 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	1	2412
	Top	13	2472

Additional Information Related to Testing (continued)

Technology Tested:	WLAN (IEEE 802.11a/n/ac) / U-NII / LE-LAN		
Channel Spacing:	20 MHz		
Modulation:	BPSK		
Data Rate:	802.11n HT20 (SISO)	MCS0	
	802.11n HT20 (MIMO)	MCS0 with CDD	
Transmit Frequency Range:	5150 MHz to 5850 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	36	5180
	Top	165	5825

3.4. Description of Available Antennas

The radio utilizes integrated antennas with the following maximum gains:

Bluetooth:

Frequency Range (MHz)	G_{Antenna WF1} (dBi)
2400 - 2480	2.3

2.4GHz WLAN:

Frequency Band (MHz)	G_{Antenna WF1} (dBi)	G_{Antenna WF2} (dBi)	G_{Antenna WF3} (dBi)
2400 - 2480	2.3	3.3	2.0

5GHz WLAN:

Frequency Band (MHz)	G_{Antenna WF1} (dBi)	G_{Antenna WF2} (dBi)	G_{Antenna WF3} (dBi)
5150 - 5250	5.7	5.3	5.5
5250 - 5350	6.5	6.0	6.3
5470 - 5725	5.1	5.2	5.0
5725 - 5850	4.6	5.2	4.5

3.5. Description of Test Setup

Support Equipment

The following support equipment was used to exercise the EUT during testing:

Brand Name:	Apple
Description:	PHF (Personal Hands Free)
Model Name or Number:	Apple EarPods
Serial Number:	Not marked or stated

Brand Name:	Belkin
Description:	USB-C Adapter
Model Name or Number:	F2CU040
Serial Number:	Not marked or stated

Brand Name:	Apple
Description:	USB-C Power Adapter
Model Name or Number:	A1718
Serial Number:	Not marked or stated

Brand Name:	Not marked or stated
Description:	Type C USB Cable. Length 2.0 metres
Model Name or Number:	Not marked or stated
Serial Number:	Not marked or stated

Brand Name:	Belkin
Description:	4 Port USB Hub
Model Name or Number:	F5U404-BLK
Serial Number:	Not marked or stated

Operating Modes

The EUT was tested in the following operating mode(s):

- Transmitting at maximum power on bottom and top channels using all combinations of technologies supported in the 2.4 and 5 GHz bands.

Configuration and Peripherals


The EUT was tested in the following configuration(s):

- *Bluetooth* Basic Rate: Transmitter radiated spurious emissions tests were performed with the EUT transmitting in Basic Rate mode as this mode was found to transmit higher power than EDR mode.
- *Bluetooth* LE: Transmitter radiated spurious emissions tests were performed with the EUT transmitting in LE mode as this mode was found to transmit higher power than LE2M mode.
- 2.4 GHz WLAN: Transmitter radiated spurious emissions tests were performed with the EUT transmitting using either 802.11n / HT20 / MCS0 / MIMO (CDD) or 802.11n / HT20 / MCS0 / SISO configuration as these modes were found to transmit higher EIRP than all the other 2.4 GHz WLAN modes.
- 5 GHz WLAN: Transmitter radiated spurious emissions tests were performed with the EUT transmitting using either 802.11n / HT20 / MCS0 / MIMO (CDD) or 802.11n / HT20 / MCS0 / SISO configuration as these modes were found to transmit higher EIRP than all the other 5 GHz WLAN modes.
- *Bluetooth* Basic Rate and 5 GHz WLAN co-location, with the EUT configured to simultaneously transmit two signals at maximum output power, *Bluetooth* on bottom channel and 5 GHz WLAN on top channel.
- *Bluetooth* Basic Rate and 5 GHz WLAN co-location, with the EUT configured to simultaneously transmit two signals at maximum output power, *Bluetooth* on top channel and 5 GHz WLAN on bottom channel.
- *Bluetooth* LE and 5 GHz WLAN co-location, with the EUT configured to simultaneously transmit two signals at maximum output power, *Bluetooth* LE on bottom channel and 5 GHz WLAN on top channel.
- *Bluetooth* LE and 5 GHz WLAN co-location, with the EUT configured to simultaneously transmit two signals at maximum output power, *Bluetooth* LE on top channel and 5 GHz WLAN on bottom channel.
- 2.4 GHz WLAN and 5 GHz WLAN co-location, with the EUT configured to simultaneously transmit two signals at maximum output power, 2.4 GHz WLAN on bottom channel and 5 GHz WLAN on top channel.
- 2.4 GHz WLAN and 5 GHz WLAN co-location, with the EUT configured to simultaneously transmit two signals at maximum output power, 2.4 GHz WLAN on top channel and 5 GHz WLAN on top channel.
- *Bluetooth* Basic Rate and 2.4 GHz WLAN co-location, with the EUT configured to simultaneously transmit two signals at maximum output power, *Bluetooth* on bottom channel and 2.4 GHz WLAN on top channel.
- *Bluetooth* Basic Rate and 2.4 GHz WLAN co-location, with the EUT configured to simultaneously transmit two signals at maximum output power, *Bluetooth* on top channel and 2.4 GHz WLAN on bottom channel.
- *Bluetooth* LE and 2.4 GHz WLAN co-location, with the EUT configured to simultaneously transmit two signals at maximum output power, *Bluetooth* LE on bottom channel and 2.4 GHz WLAN on top channel.

Configuration and Peripherals (continued)

The EUT was tested in the following configuration(s):

- *Bluetooth* LE and 2.4 GHz WLAN co-location, with the EUT configured to simultaneously transmit two signals at maximum output power, *Bluetooth* LE on top channel and 2.4 GHz WLAN on bottom channel.
- *Bluetooth* Basic Rate, 2.4 GHz WLAN and 5 GHz WLAN co-location, with the EUT configured to simultaneously transmit three signals at maximum output power, *Bluetooth* on top channel, 2.4 GHz WLAN on bottom channel and 5 GHz WLAN on bottom channel.
- *Bluetooth* Basic Rate, 2.4 GHz WLAN and 5 GHz WLAN co-location, with the EUT configured to simultaneously transmit three signals at maximum output power, *Bluetooth* on top channel, 2.4 GHz WLAN on bottom channel and 5 GHz WLAN on top channel.
- *Bluetooth* Basic Rate, 2.4 GHz WLAN and 5 GHz WLAN co-location, with the EUT configured to simultaneously transmit three signals at maximum output power, *Bluetooth* on bottom channel, 2.4 GHz WLAN on top channel and 5 GHz WLAN on bottom channel.
- *Bluetooth* Basic Rate, 2.4 GHz WLAN and 5 GHz WLAN co-location, with the EUT configured to simultaneously transmit three signals at maximum output power, *Bluetooth* on bottom channel, 2.4 GHz WLAN on top channel and 5 GHz WLAN on top channel.
- *Bluetooth* LE, 2.4 GHz WLAN and 5 GHz WLAN co-location, with the EUT configured to simultaneously transmit three signals at maximum output power, *Bluetooth* LE on top channel, 2.4 GHz WLAN on bottom channel and 5 GHz WLAN on bottom channel.
- *Bluetooth* LE, 2.4 GHz WLAN and 5 GHz WLAN co-location, with the EUT configured to simultaneously transmit three signals at maximum output power, *Bluetooth* LE on top channel, 2.4 GHz WLAN on bottom channel and 5 GHz WLAN on top channel.
- *Bluetooth* LE, 2.4 GHz WLAN and 5 GHz WLAN co-location, with the EUT configured to simultaneously transmit three signals at maximum output power, *Bluetooth* LE on bottom channel, 2.4 GHz WLAN on top channel and 5 GHz WLAN on bottom channel.
- *Bluetooth* LE, 2.4 GHz WLAN and 5 GHz WLAN co-location, with the EUT configured to simultaneously transmit three signals at maximum output power, *Bluetooth* LE on bottom channel, 2.4 GHz WLAN on top channel and 5 GHz WLAN top channel.
- The EUT was charging via a USB power supply connected to a 120 VAC 60 Hz single phase mains supply.
- Pre-scans were performed with the EUT at maximum power. All final measurements were performed with the EUT configured for typical output power.

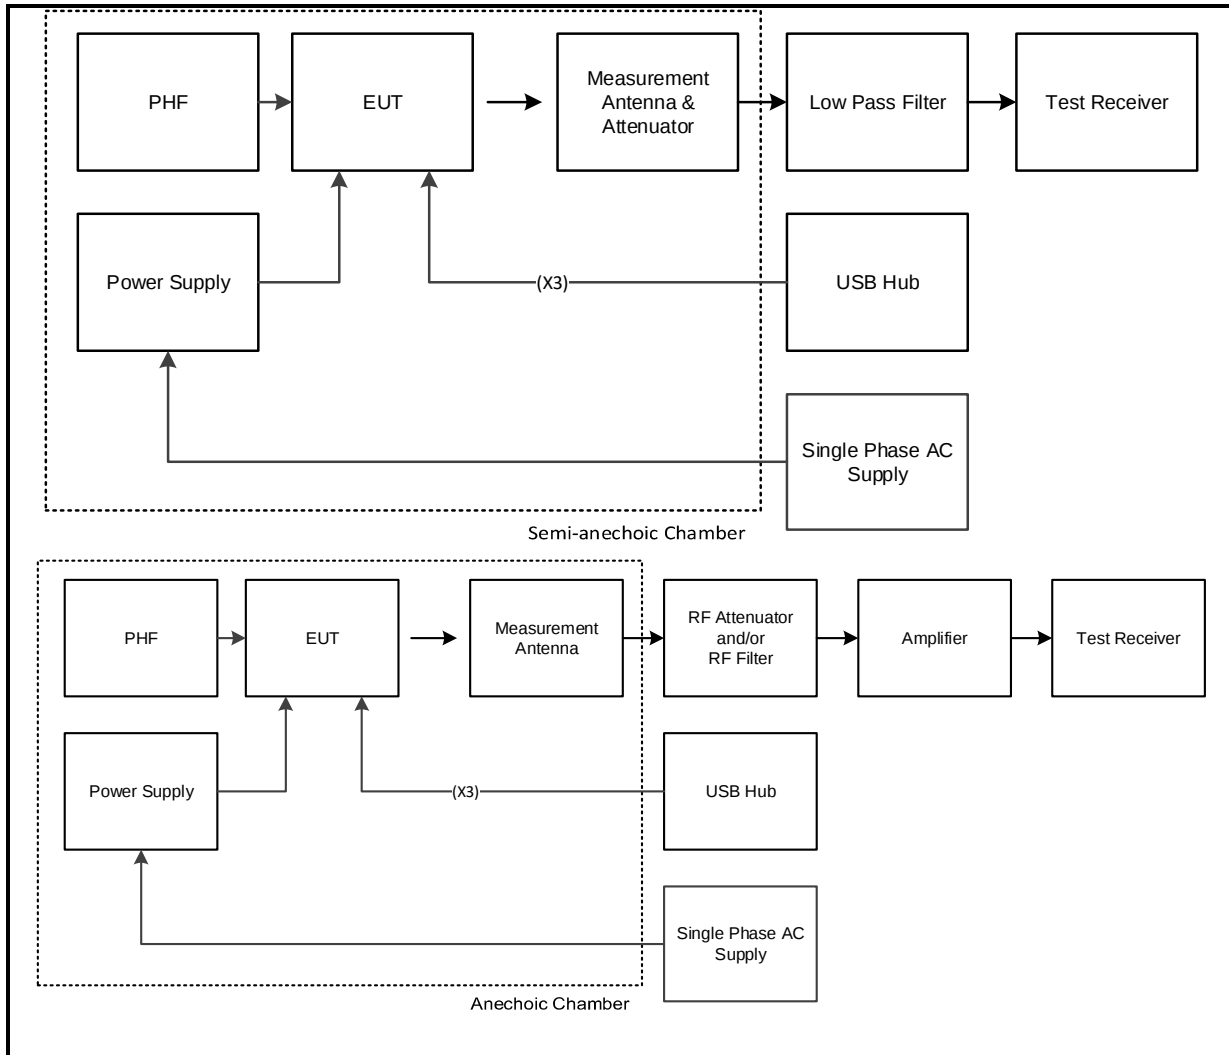Test Setup Diagrams**Transmitter Radiated Emissions**

4. Radiated Test Results

4.1. Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate bottom channel / 5 GHz WLAN (SISO) top channel

Test Summary:

Test Engineers:	Mohamed Toubella, Marco Zunarelli, Tom Sleigh & Mark Perry	Test Dates:	27 April 2018 to 11 May 2018
Test Sample Serial Number:	C02W6002JTDV, C02VR00RJH93		

FCC Reference:	Parts 15.33, 15.205(a), 15.209(a), 15.247(d) & 15.407(b)
ISED Canada Reference:	RSS-Gen 6.13 & 8.9 / RSS-247 5.5 & 6.2.4.2
Test Method Used:	ANSI C63.10 Sections 6.3, 6.5, 6.6, 11.11, 11.12.2.4 & 11.12.2.5.1, KDB 789033 II.G
Frequency Range:	30 MHz to 40 GHz
Configuration:	<i>Bluetooth</i> Basic Rate bottom channel / 5 GHz WLAN (SISO) top channel

Environmental Conditions:

Temperature (°C):	20 to 24
Relative Humidity (%):	36 to 48

Note(s):





1. All intermodulation products were below the noise floor level or greater than 20 dB from the specification limit.
2. The *Bluetooth* fundamental is shown on the 1 GHz to 3 GHz plot.
3. The 5 GHz WLAN fundamental is shown on the 4 GHz to 6 GHz plot.
4. Pre-scans were made against the FCC Part 15 general limits for radiated emissions.
5. The test receiver resolution bandwidth was set to 120 kHz and video bandwidth to 500 kHz, for measurements below 1 GHz. For measurements above 1 GHz the resolution bandwidth was set to 1 MHz and video bandwidth to 3 MHz, with the sweep time set to auto. Markers were placed on the highest measured level.
6. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
7. Measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.





Transmitter Out of Band Radiated Emissions - Bluetooth Basic Rate bottom channel / 5 GHz WLAN top channel (continued)**Results: Peak**


Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

Results: Average

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

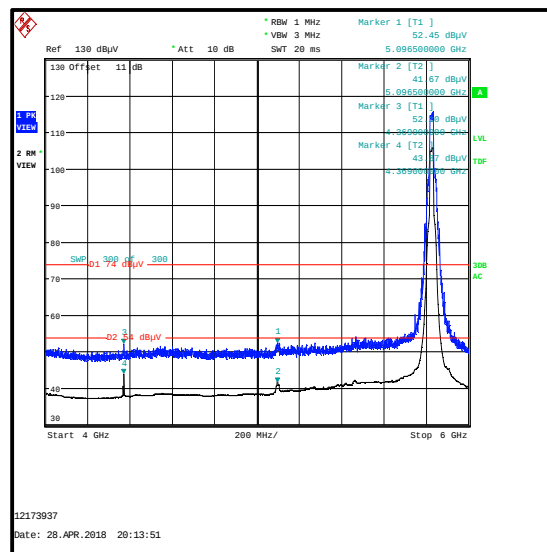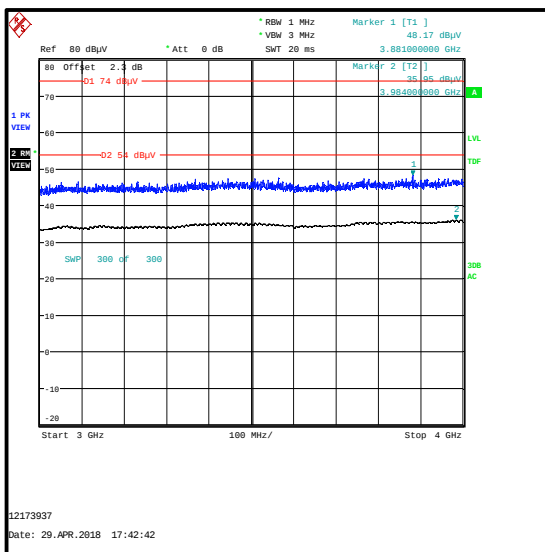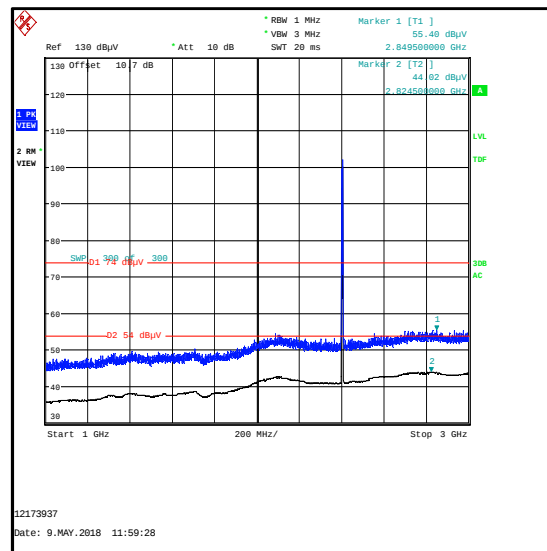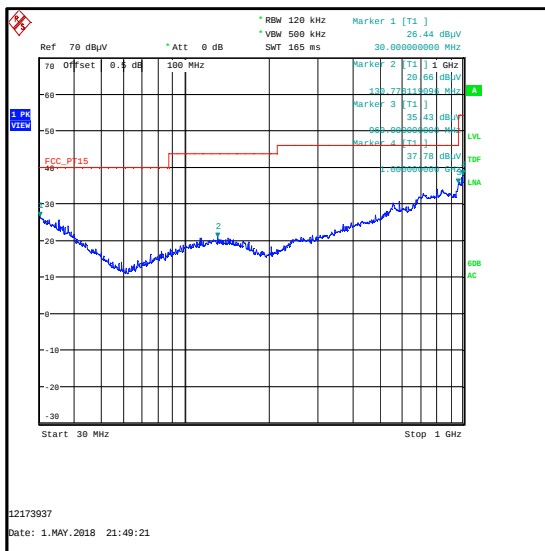

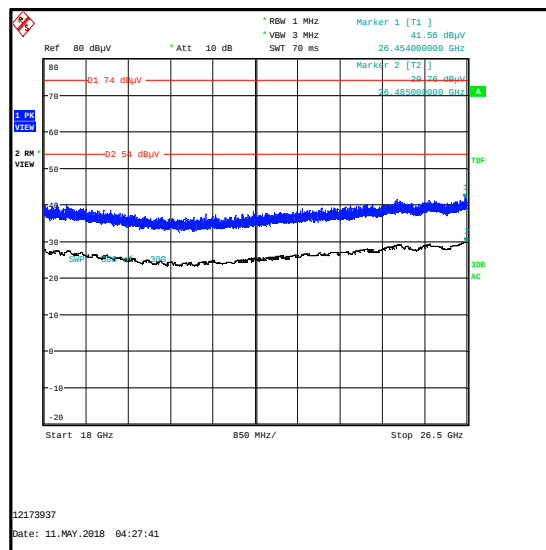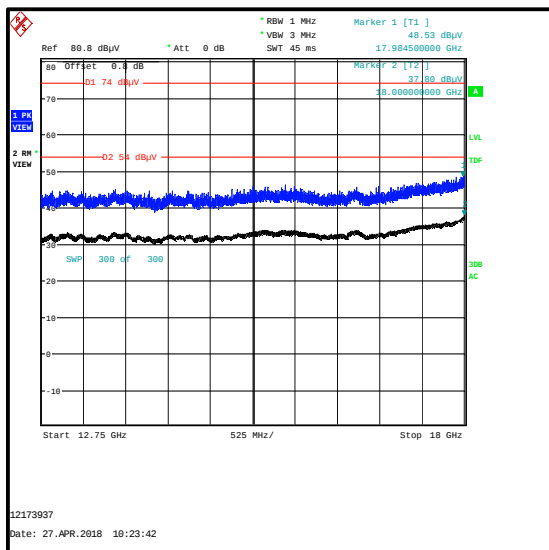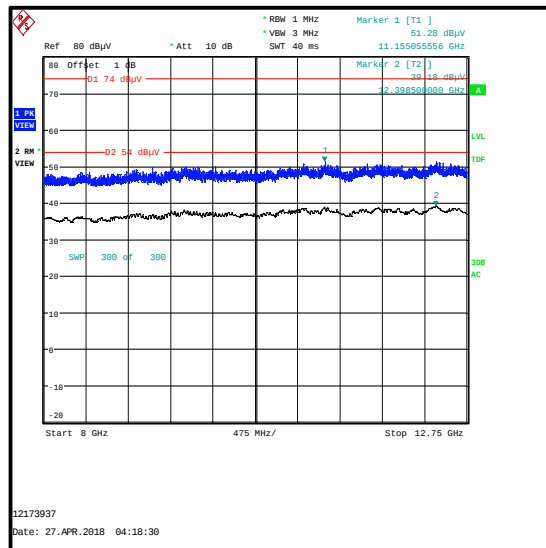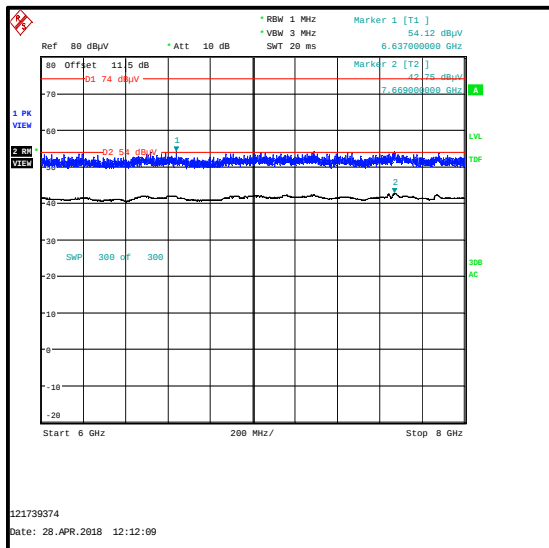Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate bottom channel / 5 GHz WLAN (SISO) top channel (continued)

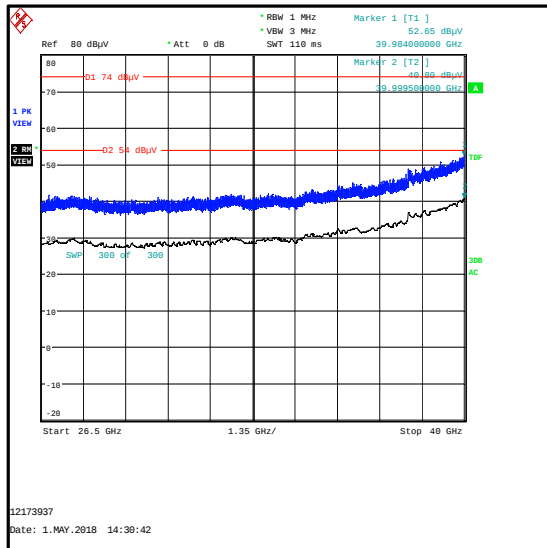Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate bottom channel / 5 GHz WLAN (SISO) top channel (continued)

4.2. Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate top channel / 5 GHz WLAN (SISO) bottom channel

Test Summary:

Test Engineers:	Mohamed Toubella, Marco Zunarelli, Tom Sleigh & Mark Perry	Test Dates:	27 April 2018 to 9 May 2018
Test Sample Serial Number:	C02W6002JTDV, C02VR00RJH93		

FCC Reference:	Parts 15.33, 15.205(a), 15.209(a), 15.247(d) & 15.407(b)
ISED Canada Reference:	RSS-Gen 6.13 & 8.9 / RSS-247 5.5 & 6.2.1.2
Test Method Used:	ANSI C63.10 Sections 6.3, 6.5, 6.6, 11.11, 11.12.2.4 & 11.12.2.5.1, KDB 789033 II.G
Frequency Range:	30 MHz to 40 GHz
Configuration:	<i>Bluetooth</i> Basic Rate top channel / 5 GHz WLAN (SISO) bottom channel

Environmental Conditions:

Temperature (°C):	20 to 24
Relative Humidity (%):	36 to 48

Note(s):





1. All intermodulation products were below the noise floor level or greater than 20 dB from the specification limit.
2. The *Bluetooth* fundamental is shown on the 1 GHz to 3 GHz plot.
3. The 5 GHz WLAN fundamental is shown on the 4 GHz to 6 GHz plot.
4. Pre-scans were made against the FCC Part 15 general limits for radiated emissions.
5. The test receiver resolution bandwidth was set to 120 kHz and video bandwidth to 500 kHz, for measurements below 1 GHz. For measurements above 1 GHz the resolution bandwidth was set to 1 MHz and video bandwidth to 3 MHz, with the sweep time set to auto. Markers were placed on the highest measured level.
6. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
7. Measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.





Transmitter Out of Band Radiated Emissions - Bluetooth Basic Rate top channel / 5 GHz WLAN (SISO) bottom channel (continued)**Results: Peak**


Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

Results: Average

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

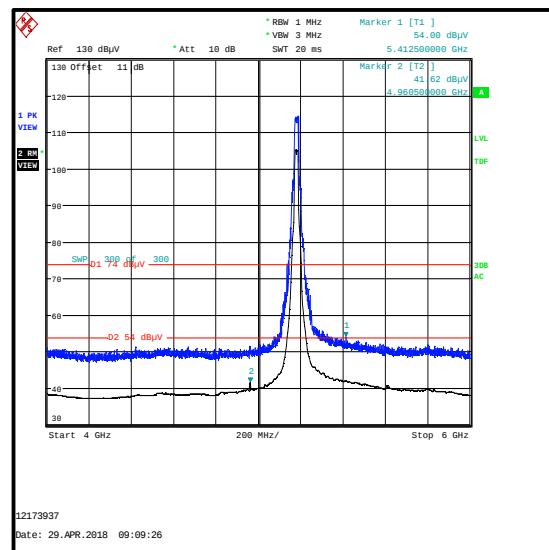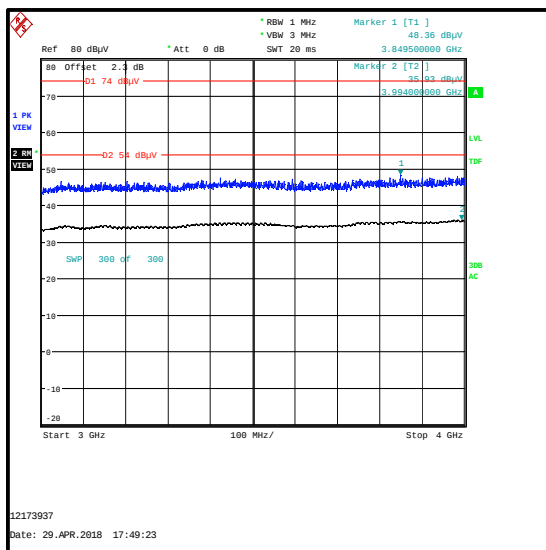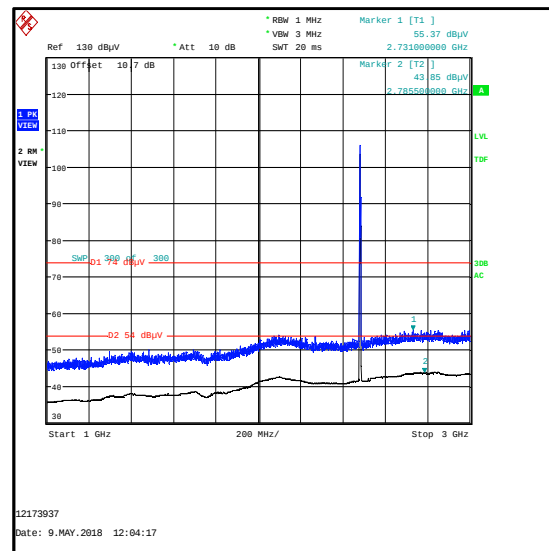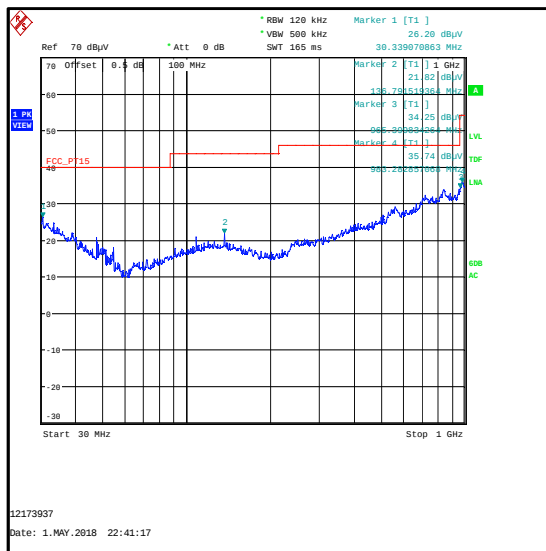

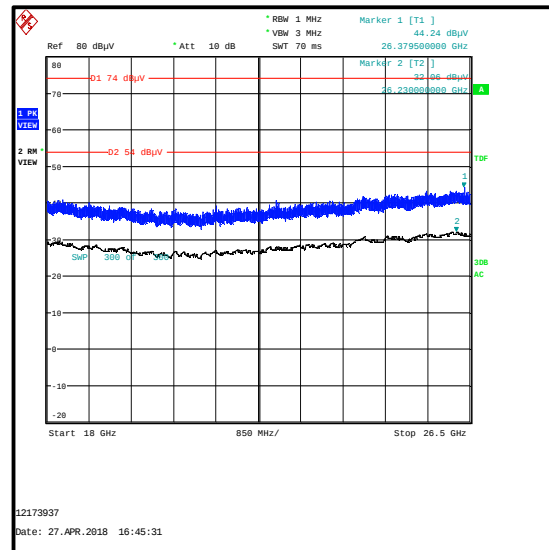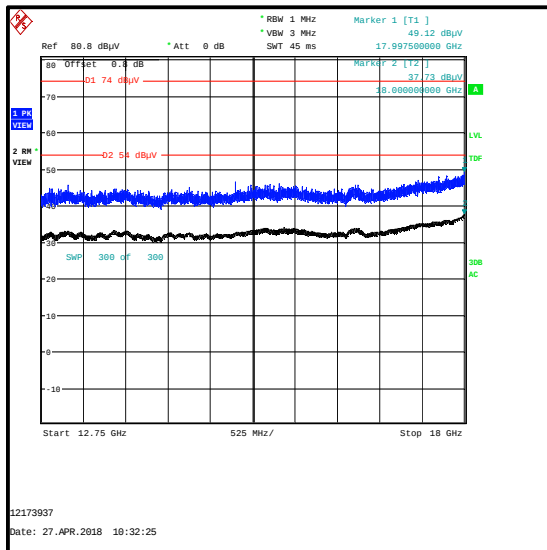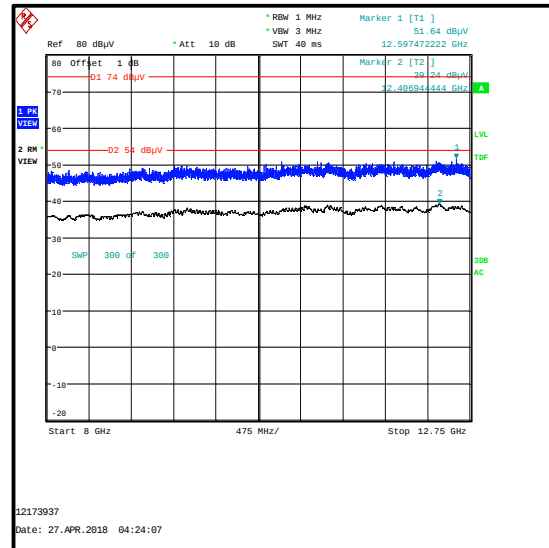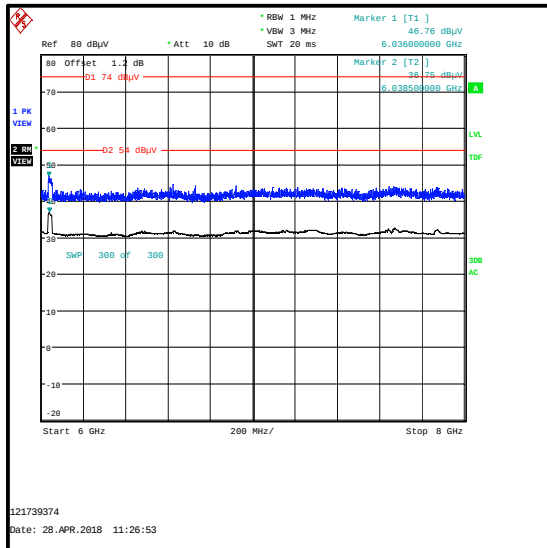**Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate top channel / 5 GHz
WLAN (SISO) bottom channel (continued)**

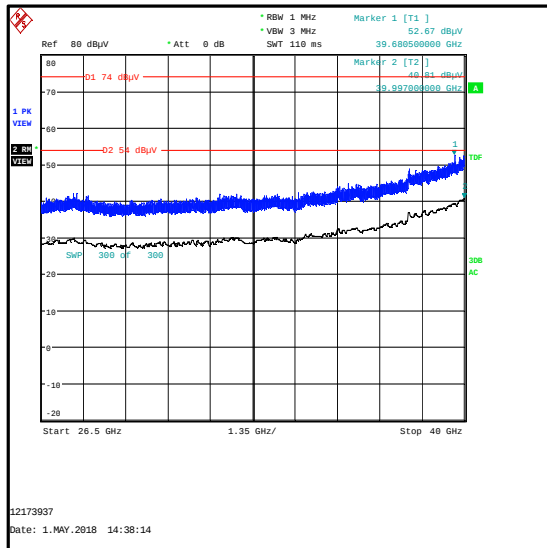**Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate top channel / 5 GHz
WLAN (SISO) bottom channel (continued)**

4.3. Transmitter Out of Band Radiated Emissions - Bluetooth LE bottom channel / 5 GHz WLAN (SISO) top channel

Test Summary:

Test Engineers:	Mohamed Toubella, Marco Zunarelli, Tom Sleigh & Mark Perry	Test Dates:	27 April 2018 to 13 May 2018
Test Sample Serial Number:	C02W6002JTDV, C02VR00RJH93		

FCC Reference:	Parts 15.33, 15.205(a), 15.209(a), 15.247(d) & 15.407(b)
ISED Canada Reference:	RSS-Gen 6.13 & 8.9 / RSS-247 5.5 & 6.2.4.2
Test Method Used:	ANSI C63.10 Sections 6.3, 6.5, 6.6, 11.11, 11.12.2.4 & 11.12.2.5.1, KDB 558074 Sections 11, 12.2.4 & 12.2.5.1, KDB 789033 II.G
Frequency Range:	30 MHz to 40 GHz
Configuration:	Bluetooth LE bottom channel / 5 GHz WLAN (SISO) top channel

Environmental Conditions:

Temperature (°C):	20 to 24
Relative Humidity (%):	36 to 50

Note(s):

1. All intermodulation products were below the noise floor level or greater than 20 dB from the specification limit.
2. The Bluetooth LE fundamental is shown on the 1 GHz to 3 GHz plot.
3. The 5 GHz WLAN fundamental is shown on the 4 GHz to 6 GHz plot.
4. Pre-scans were made against the FCC Part 15 general limits for radiated emissions.
5. The emission at approximately 4369.000 MHz is not an intermodulation product and was therefore not measured.
6. The test receiver resolution bandwidth was set to 120 kHz and video bandwidth to 500 kHz, for measurements below 1 GHz. For measurements above 1 GHz the resolution bandwidth was set to 1 MHz and video bandwidth to 3 MHz, with the sweep time set to auto. Markers were placed on the highest measured level.
7. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
8. Measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.





Transmitter Out of Band Radiated Emissions - *Bluetooth* LE bottom channel / 5 GHz WLAN (SISO) top channel (continued)





Results: Peak


Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

Results: Average

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

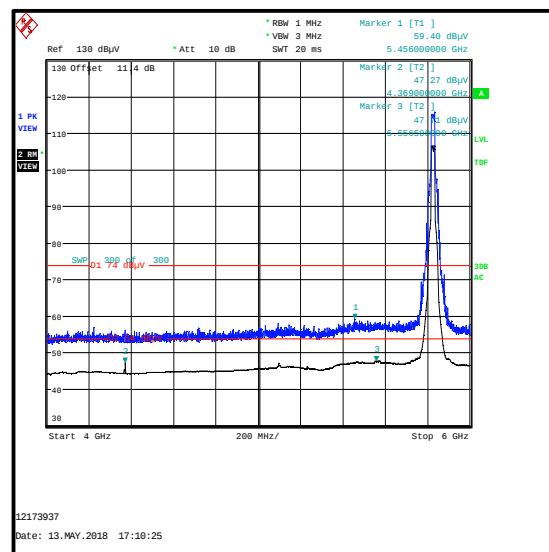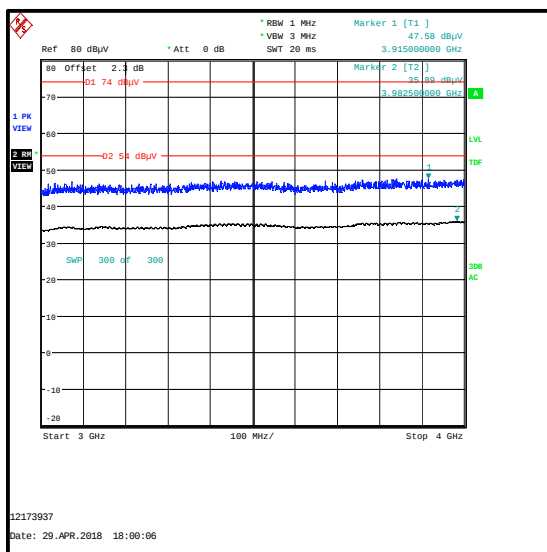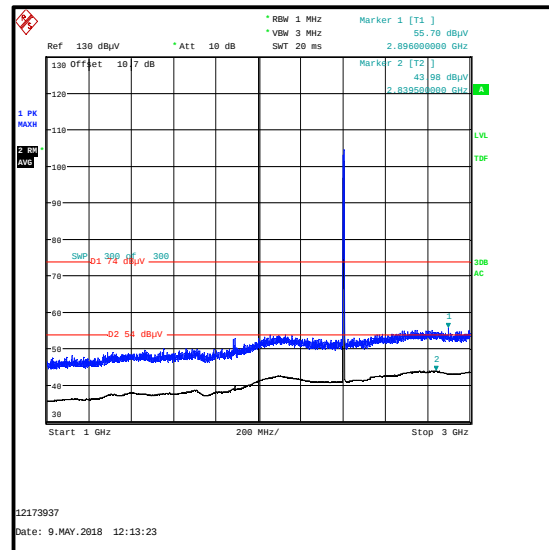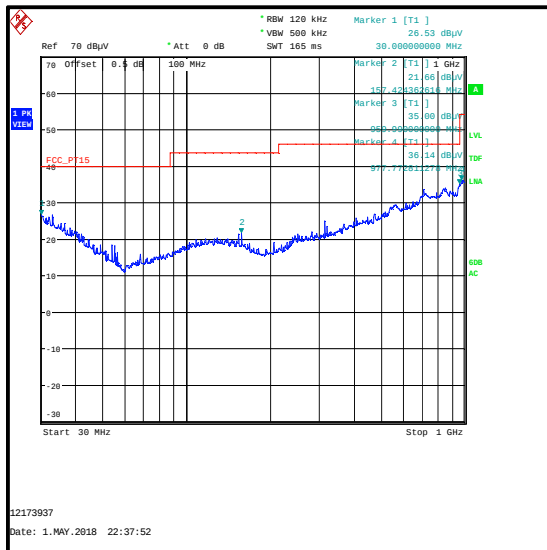

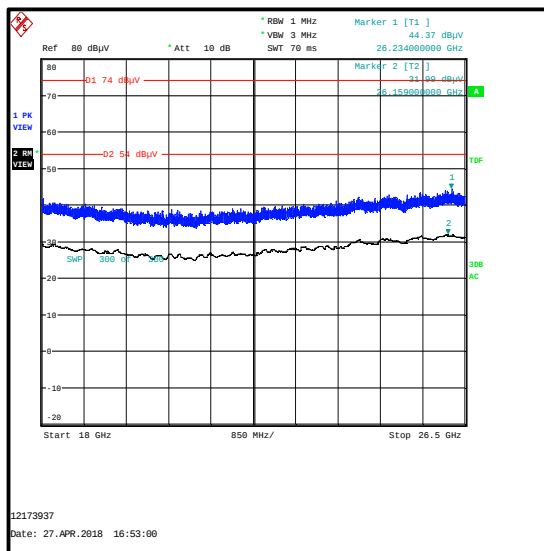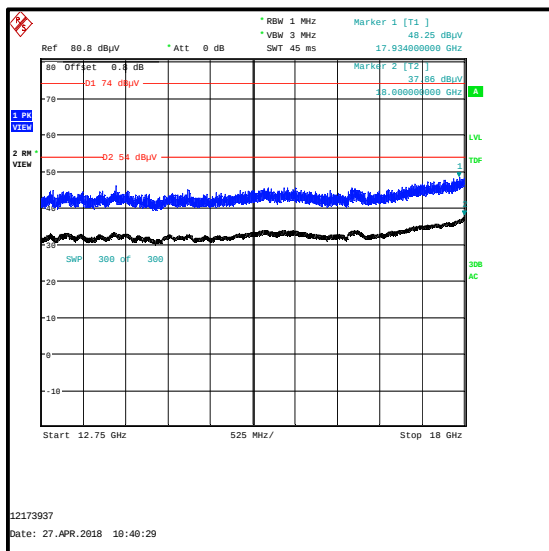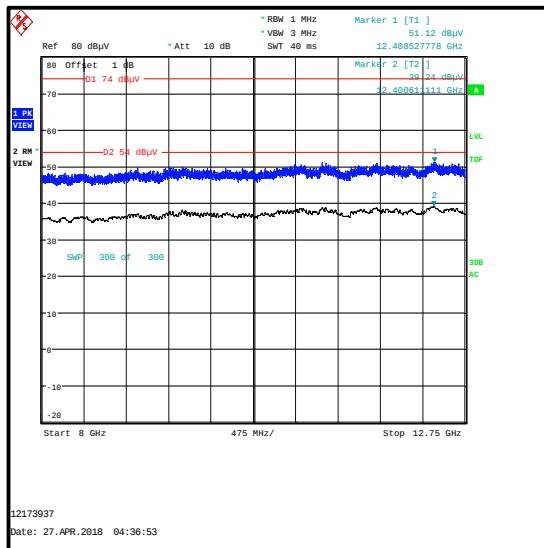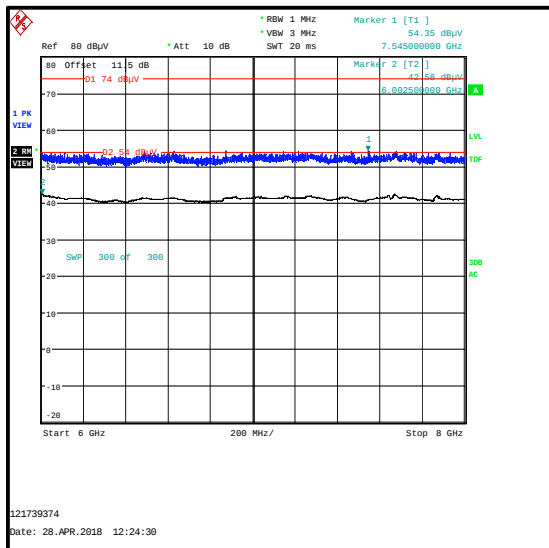Transmitter Out of Band Radiated Emissions - *Bluetooth* LE bottom channel / 5 GHz WLAN (SISO) top channel (continued)

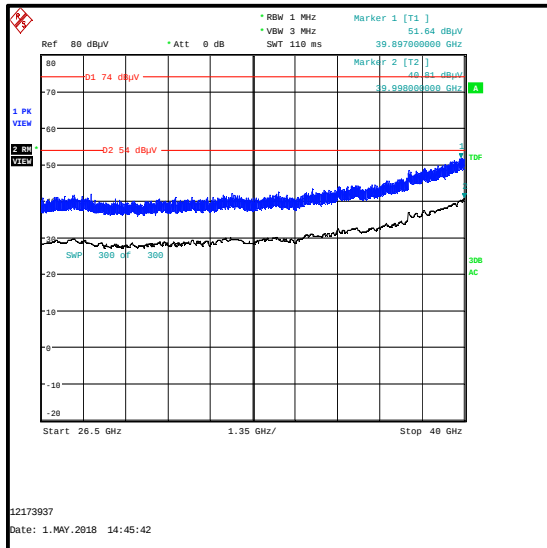Transmitter Out of Band Radiated Emissions - *Bluetooth* LE bottom channel / 5 GHz WLAN (SISO) top channel (continued)

4.4. Transmitter Out of Band Radiated Emissions - *Bluetooth* LE top channel / 5 GHz WLAN (SISO) bottom channel

Test Summary:

Test Engineers:	Mohamed Toubella, Marco Zunarelli, Tom Sleigh & Mark Perry	Test Dates:	27 April 2018 to 9 May 2018
Test Sample Serial Number:	C02W6002JTDTV, C02VR00RJH93		

FCC Reference:	Parts 15.33, 15.205(a), 15.209(a), 15.247(d) & 15.407(b)
ISED Canada Reference:	RSS-Gen 6.13 & 8.9 / RSS-247 5.5 & 6.2.1.2
Test Method Used:	ANSI C63.10 Sections 6.3, 6.5, 6.6, 11.11, 11.12.2.4 & 11.12.2.5.1, KDB 558074 Sections 11, 12.2.4 & 12.2.5.1, KDB 789033 II.G
Frequency Range:	30 MHz to 40 GHz
Configuration:	<i>Bluetooth</i> LE top channel / 5 GHz WLAN (SISO) bottom channel

Environmental Conditions:

Temperature (°C):	20 to 24
Relative Humidity (%):	36 to 48

Note(s):





1. All intermodulation products were below the noise floor level or greater than 20 dB from the specification limit.
2. The *Bluetooth* LE fundamental is shown on the 1 GHz to 3 GHz plot.
3. The 5 GHz WLAN fundamental is shown on the 4 GHz to 6 GHz plot.
4. Pre-scans were made against the FCC Part 15 general limits for radiated emissions.
5. The test receiver resolution bandwidth was set to 120 kHz and video bandwidth to 500 kHz, for measurements below 1 GHz. For measurements above 1 GHz the resolution bandwidth was set to 1 MHz and video bandwidth to 3 MHz, with the sweep time set to auto. Markers were placed on the highest measured level.
6. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
7. Measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.





Transmitter Out of Band Radiated Emissions - Bluetooth LE top channel / 5 GHz WLAN (SISO) bottom channel (continued)**Results: Peak**


Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

Results: Average

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

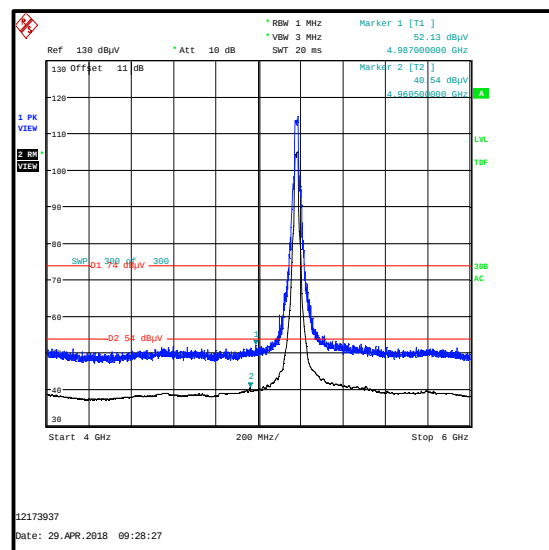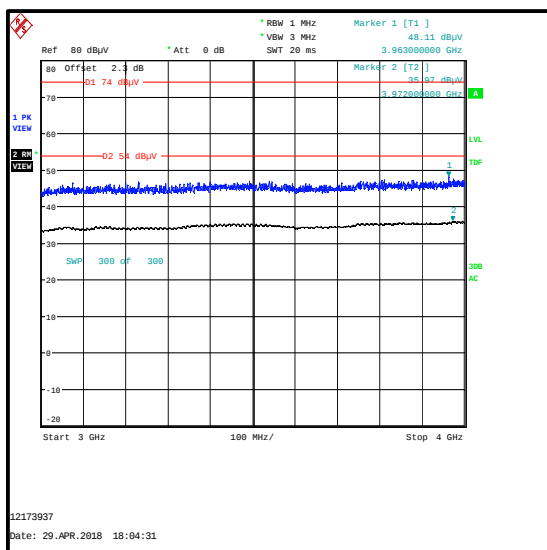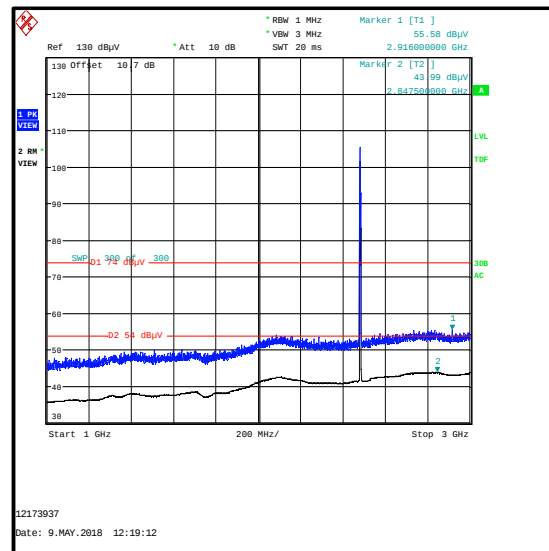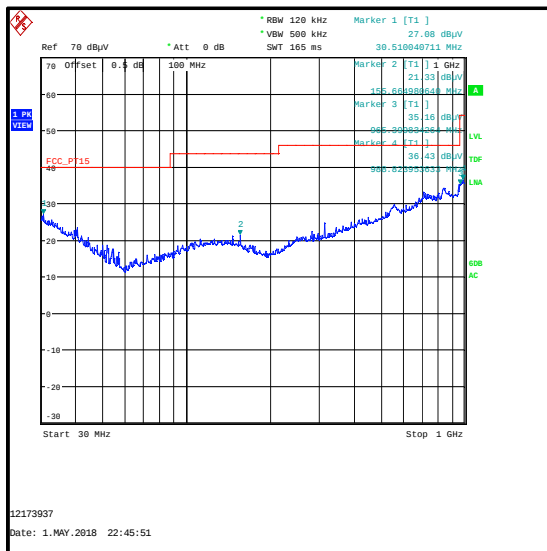

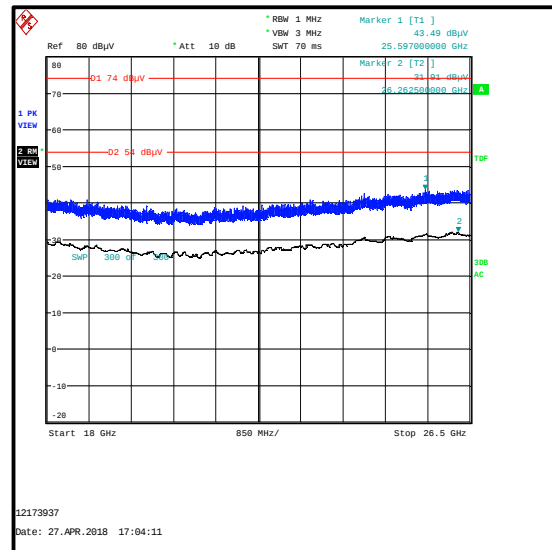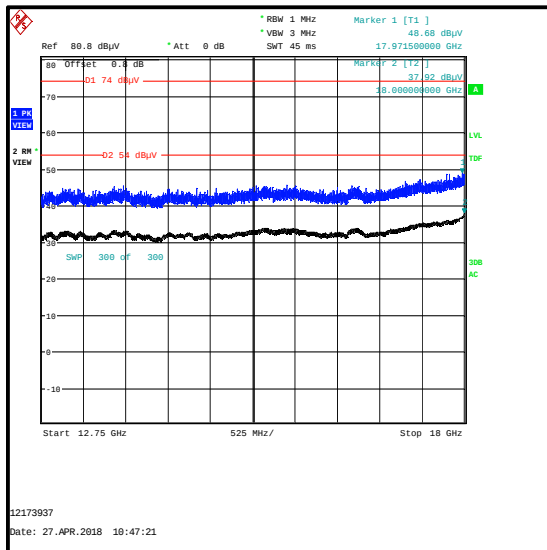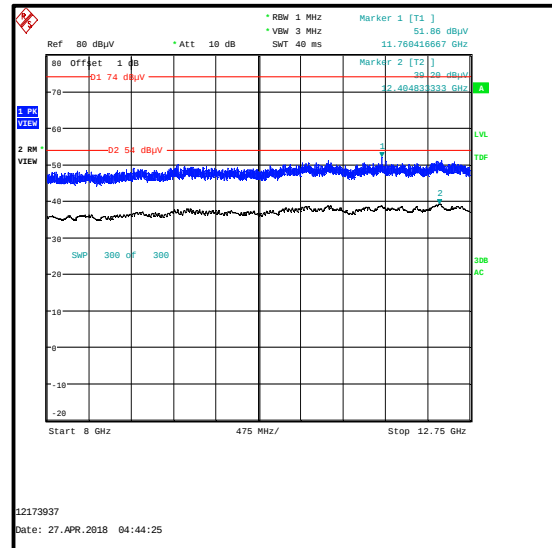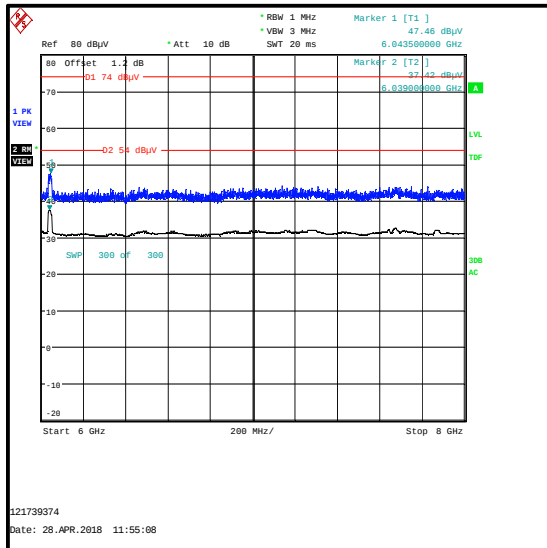Transmitter Out of Band Radiated Emissions - *Bluetooth* LE top channel / 5 GHz WLAN (SISO) bottom channel (continued)

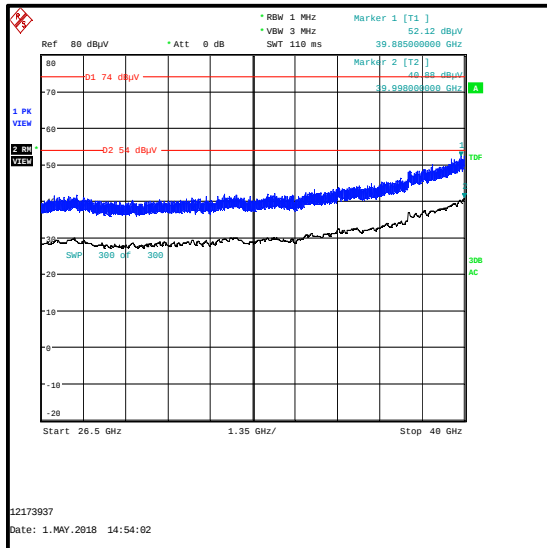Transmitter Out of Band Radiated Emissions - *Bluetooth* LE top channel / 5 GHz WLAN (SISO) bottom channel (continued)

4.5. Transmitter Out of Band Radiated Emissions - 2.4 GHz WLAN (MIMO) bottom channel / 5 GHz WLAN (SISO) top channel

Test Summary:

Test Engineers:	Mohamed Toubella, Marco Zunarelli, Tom Sleigh & Mark Perry	Test Dates:	24 April 2018 to 13 May 2018
Test Sample Serial Number:	C02W6002JTDV, C02VR00RJH93		

FCC Reference:	Parts 15.33, 15.205(a), 15.209(a), 15.247(d) & 15.407(b)
ISED Canada Reference:	RSS-Gen 6.13 & 8.9 / RSS-247 5.5 & 6.2.4.2
Test Method Used:	ANSI C63.10 Sections 6.3, 6.5, 6.6, 11.11, 11.12.2.4 & 11.12.2.5.1, KDB 558074 Sections 11, 12.2.4 & 12.2.5.1, KDB 789033 II.G
Frequency Range:	30 MHz to 40 GHz
Configuration:	2.4 GHz WLAN (3Tx MIMO) bottom channel / 5 GHz WLAN (SISO) top channel

Environmental Conditions:

Temperature (°C):	20 to 24
Relative Humidity (%):	36 to 50

Note(s):





1. All intermodulation products were below the noise floor level or greater than 20 dB from the specification limit.
2. The 2.4 GHz WLAN fundamental is shown on the 1 GHz to 3 GHz plot.
3. The 5 GHz WLAN fundamental is shown on the 4 GHz to 6 GHz plot.
4. Pre-scans were made against the FCC Part 15 general limits for radiated emissions.
5. The test receiver resolution bandwidth was set to 120 kHz and video bandwidth to 500 kHz, for measurements below 1 GHz. For measurements above 1 GHz the resolution bandwidth was set to 1 MHz and video bandwidth to 3 MHz, with the sweep time set to auto. Markers were placed on the highest measured level.
6. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
7. Measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.





Transmitter Out of Band Radiated Emissions - 2.4 GHz WLAN (MIMO) bottom channel / 5 GHz WLAN (SISO) top channel (continued)**Results: Peak**


Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

Results: Average

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

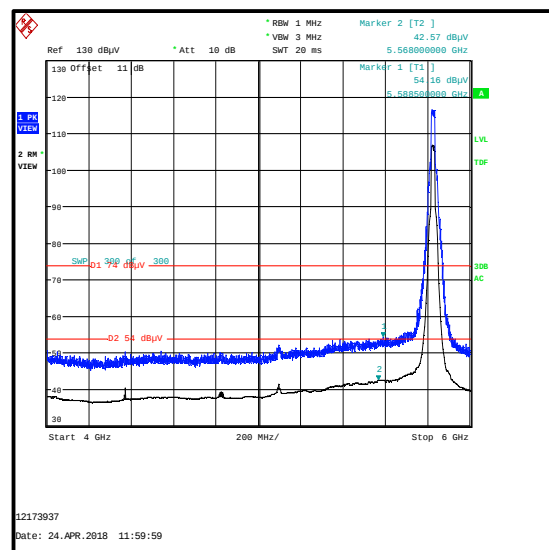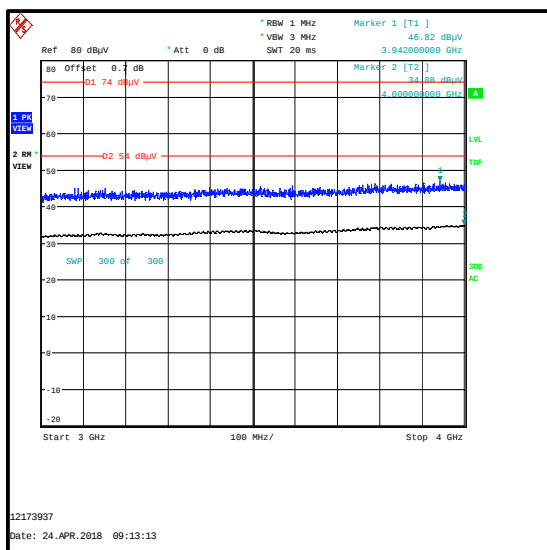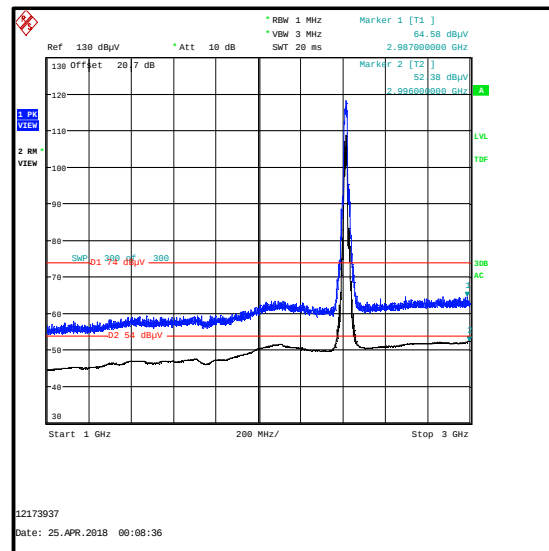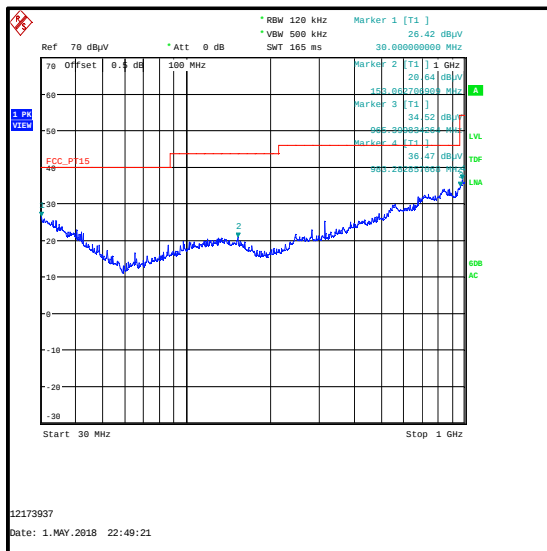

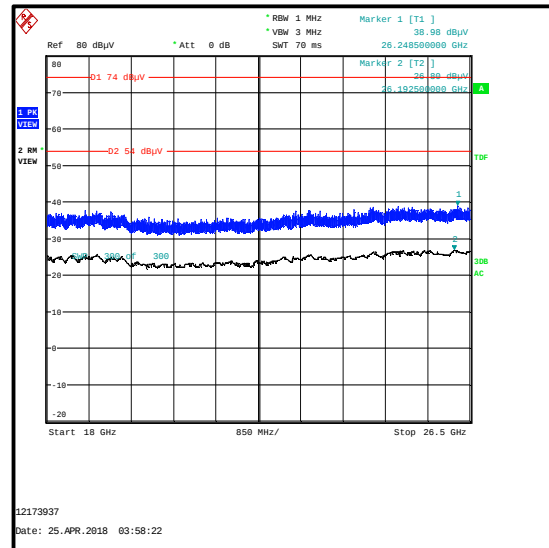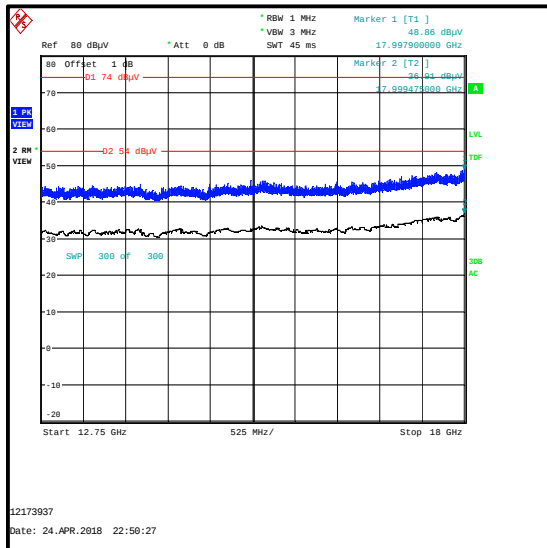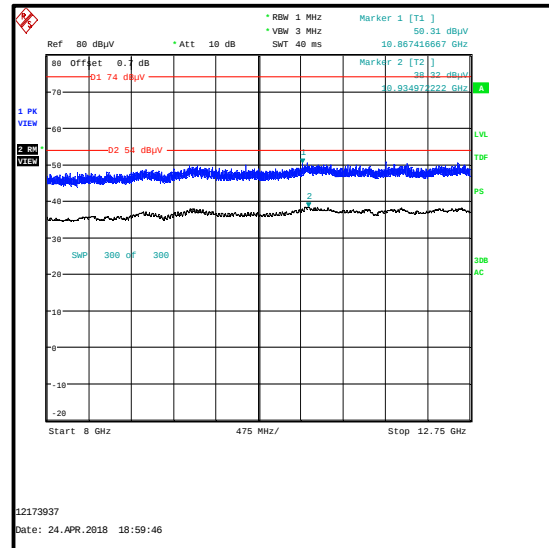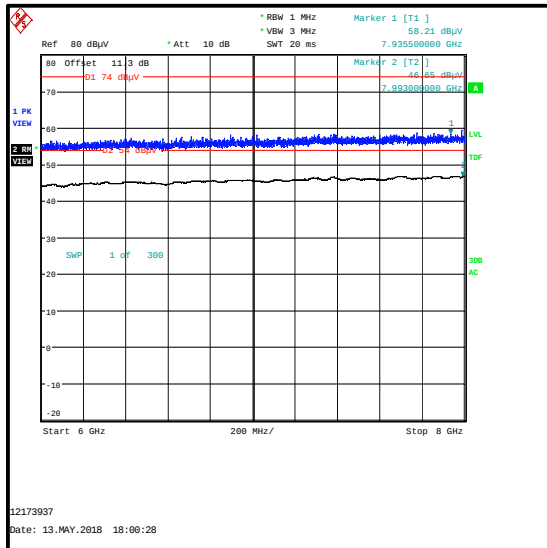Transmitter Out of Band Radiated Emissions - 2.4 GHz WLAN (MIMO) bottom channel / 5 GHz WLAN (SISO) top channel (continued)

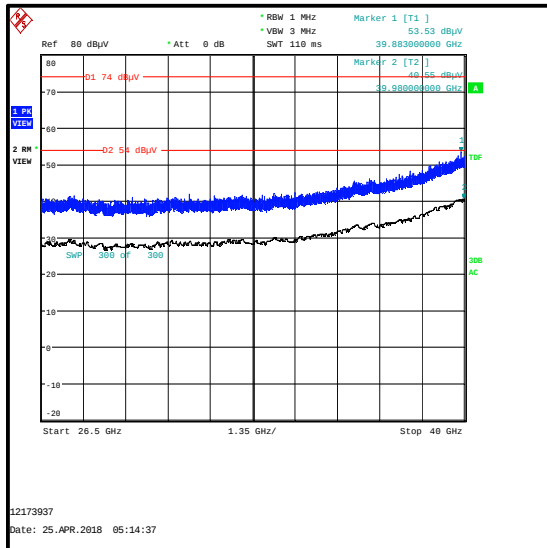Transmitter Out of Band Radiated Emissions - 2.4 GHz WLAN (MIMO) bottom channel / 5 GHz WLAN (SISO) top channel (continued)

4.6. Transmitter Out of Band Radiated Emissions - 2.4 GHz WLAN (MIMO) top channel / 5 GHz WLAN (SISO) top channel

Test Summary:

Test Engineers:	Mohamed Toubella, Marco Zunarelli, Tom Sleight & Mark Perry	Test Dates:	27 April 2018 to 9 May 2018
Test Sample Serial Number:	C02W6002JTDV, C02VR00RJH93		

FCC Reference:	Parts 15.33, 15.205(a), 15.209(a), 15.247(d) & 15.407(b)
ISED Canada Reference:	RSS-Gen 6.13 & 8.9 / RSS-247 5.5 & 6.2.4.2
Test Method Used:	ANSI C63.10 Sections 6.3, 6.5, 6.6, 11.11, 11.12.2.4 & 11.12.2.5.1, KDB 558074 Sections 11, 12.2.4 & 12.2.5.1, KDB 789033 II.G
Frequency Range:	30 MHz to 40 GHz
Configuration:	2.4 GHz WLAN (3Tx MIMO) top channel / 5 GHz WLAN (SISO) top channel

Environmental Conditions:

Temperature (°C):	20 to 24
Relative Humidity (%):	36 to 48

Note(s):





1. All intermodulation products were below the noise floor level or greater than 20 dB from the specification limit.
2. The 2.4 GHz WLAN fundamental is shown on the 1 GHz to 3 GHz plot.
3. The 5 GHz WLAN fundamental is shown on the 4 GHz to 6 GHz plot.
4. Pre-scans were made against the FCC Part 15 general limits for radiated emissions.
5. The emission at approximately 4944.000 MHz is the second harmonic of the 2.4 GHz WLAN signal and was therefore not measured.
6. The emissions at approximately 5104.000 MHz and 5225.000 MHz are not intermodulation products and were therefore not measured.
7. The test receiver resolution bandwidth was set to 120 kHz and video bandwidth to 500 kHz, for measurements below 1 GHz. For measurements above 1 GHz the resolution bandwidth was set to 1 MHz and video bandwidth to 3 MHz, with the sweep time set to auto. Markers were placed on the highest measured level.
8. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
9. Measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.





Transmitter Out of Band Radiated Emissions - 2.4 GHz WLAN (MIMO) top channel / 5 GHz WLAN (SISO) top channel (continued)**Results: Peak**


Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

Results: Average

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

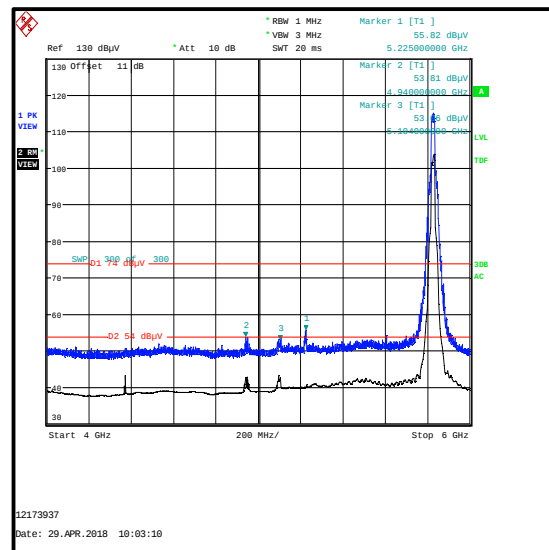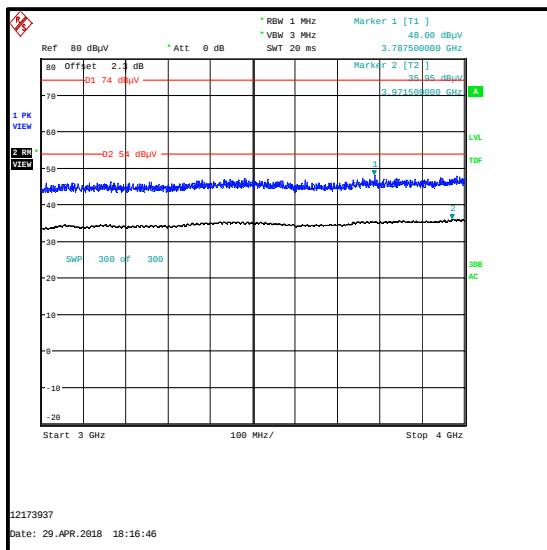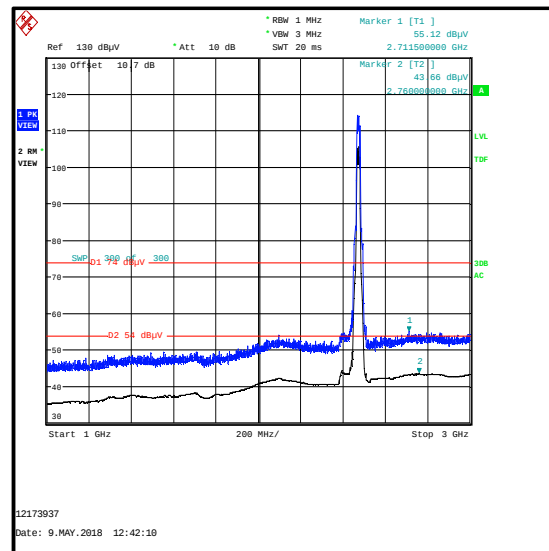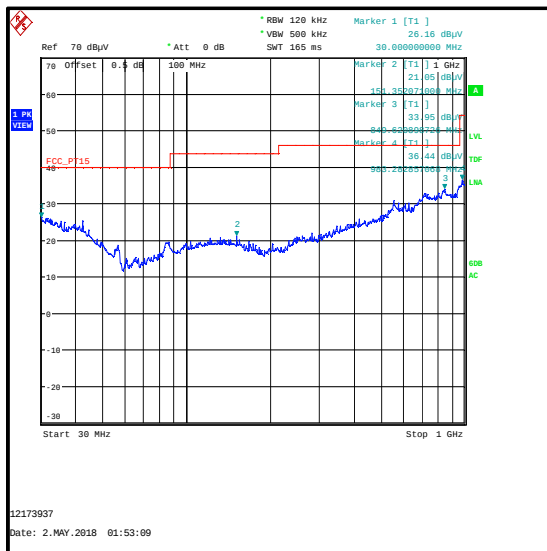

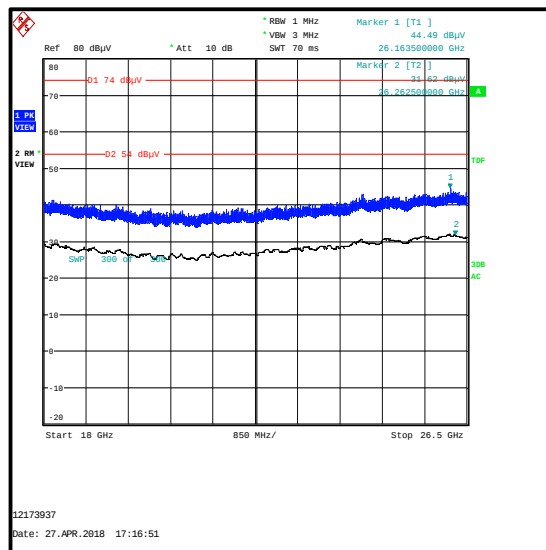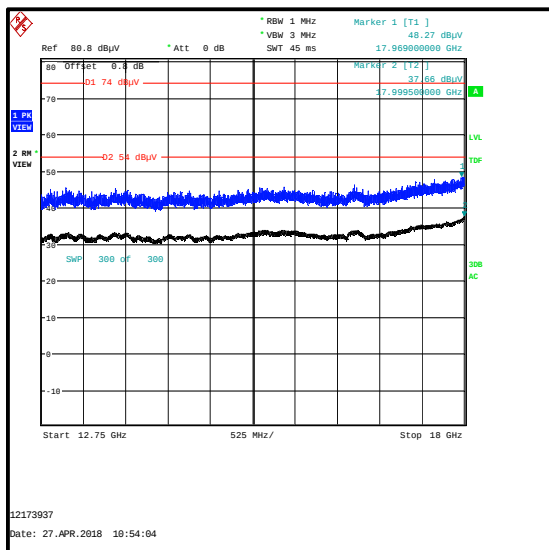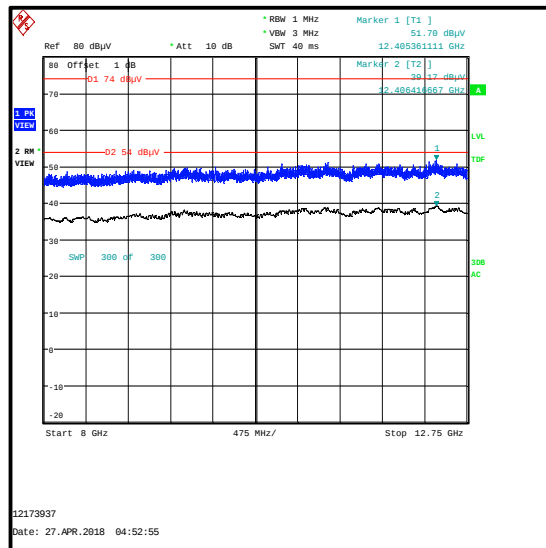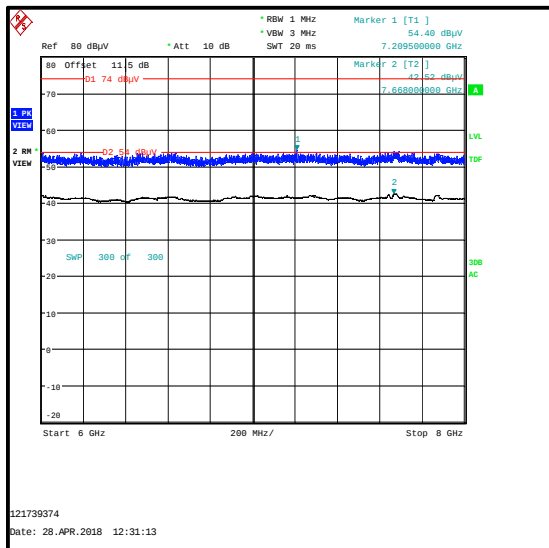Transmitter Out of Band Radiated Emissions - 2.4 GHz WLAN (MIMO) top channel / 5 GHz WLAN (SISO) top channel (continued)

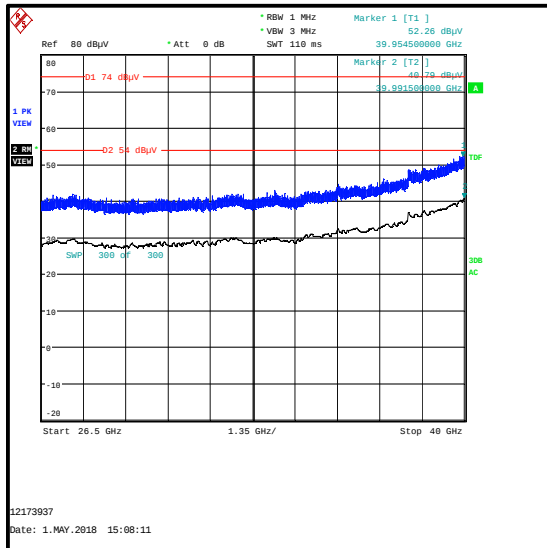Transmitter Out of Band Radiated Emissions - 2.4 GHz WLAN (MIMO) top channel / 5 GHz WLAN (SISO) top channel (continued)

4.7. Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate bottom channel / 2.4 GHz WLAN (MIMO) top channel

Test Summary:

Test Engineers:	Mohamed Toubella, Marco Zunarelli, Tom Sleigh & Mark Perry	Test Dates:	10 May 2018 to 13 May 2018
Test Sample Serial Number:	C02W6002JTDV, C02VR00RJH93		

FCC Reference:	Parts 15.33, 15.205(a), 15.209(a) & 15.247(d)
ISED Canada Reference:	RSS-Gen 6.13 & 8.9 / RSS-247 5.5
Test Method Used:	ANSI C63.10 Sections 6.3, 6.5, 6.6, 11.11, 11.12.2.4 & 11.12.2.5.1, KDB 558074 Sections 11, 12.2.4 & 12.2.5.1
Frequency Range:	30 MHz to 26.5 GHz
Configuration:	<i>Bluetooth</i> Basic Rate bottom channel / 2.4 GHz WLAN (2Tx MIMO) top channel

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	36 to 44

Note(s):





1. All intermodulation products other than those noted in the table below were below the noise floor level or greater than 20 dB from the specification limit.
2. The *Bluetooth* and 2.4 GHz WLAN fundamentals are shown on the 1 GHz to 3 GHz plot.
3. Pre-scans were made against the FCC Part 15 general limits for radiated emissions.
4. The test receiver resolution bandwidth was set to 120 kHz and video bandwidth to 500 kHz, for measurements below 1 GHz. For measurements above 1 GHz the resolution bandwidth was set to 1 MHz and video bandwidth to 3 MHz, with the sweep time set to auto. Markers were placed on the highest measured level.
5. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
6. Measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
7. The 4 to 6 GHz plot was maximised for 300 sweeps. The displayed sweep count was automatically reset to 1 when the plot was saved from the test receiver. Since the traces were set to 'view' after being maximised, the displayed trace data and markers are the maximised values.





Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate bottom channel / 2.4 GHz WLAN (MIMO) top channel (continued)**Results: Peak**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
2333.859	Vertical	59.7	74	14.3	Complied

Results: Average

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
2334.134	Vertical	42.2	54	11.8	Complied

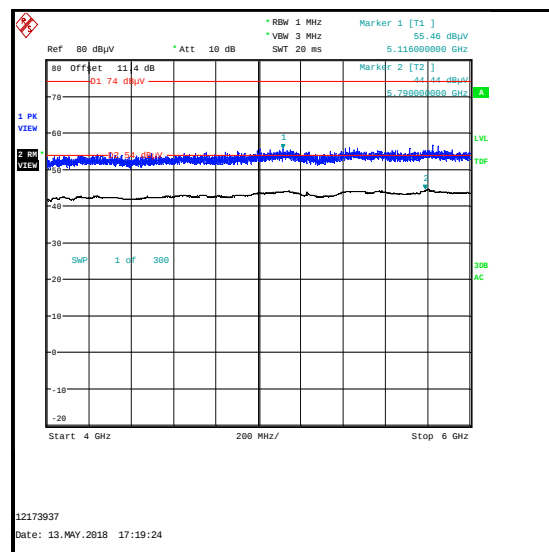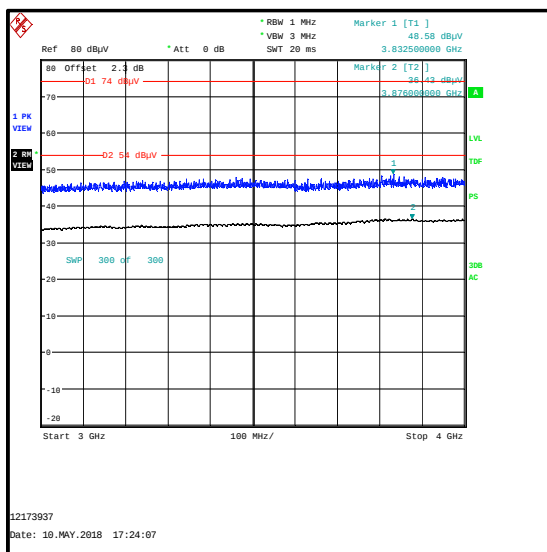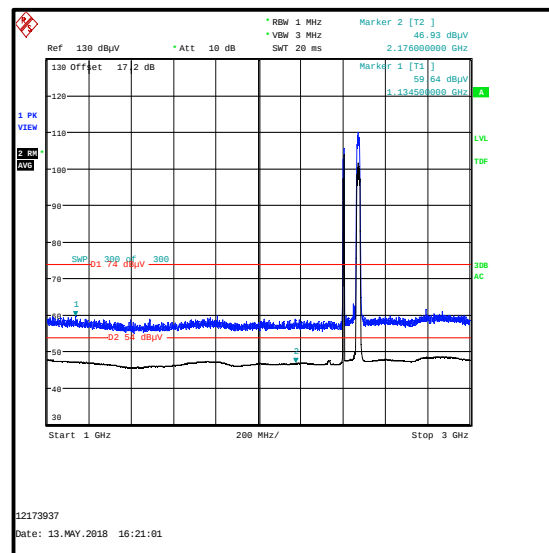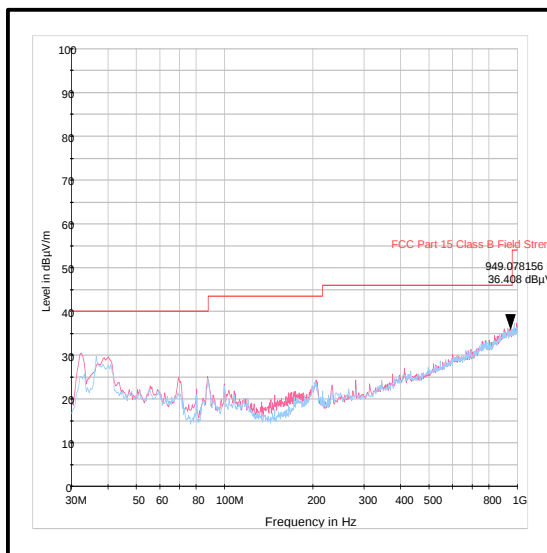

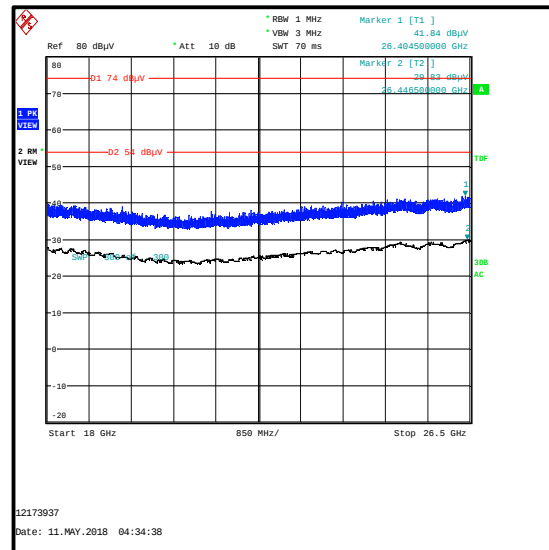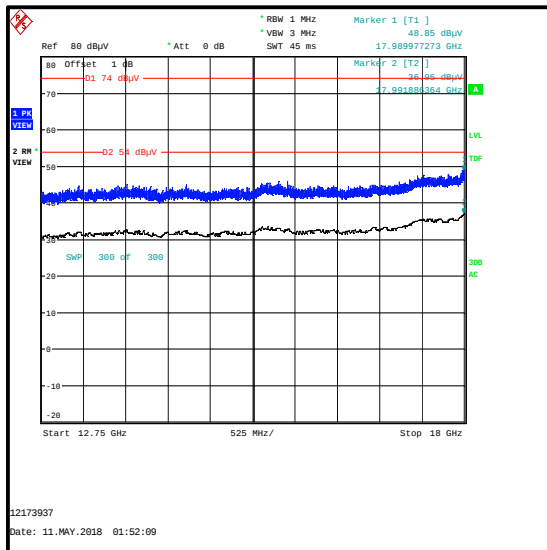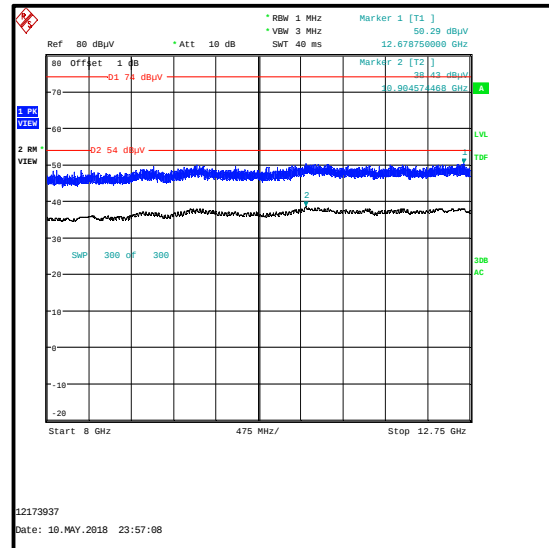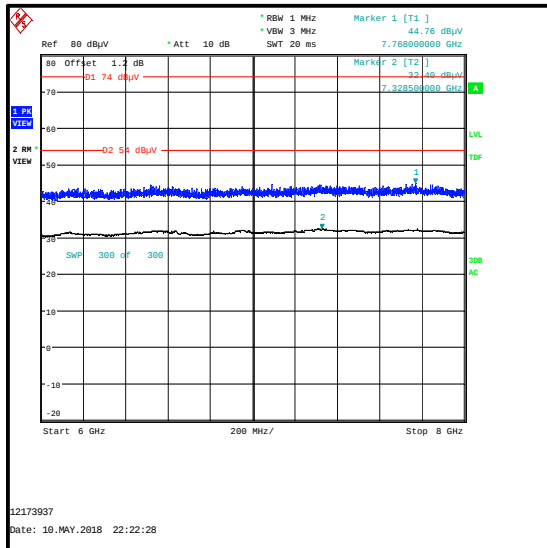Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate bottom channel / 2.4 GHz WLAN (MIMO) top channel (continued)

4.8. Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate top channel / 2.4 GHz WLAN (MIMO) bottom channel

Test Summary:

Test Engineers:	Mohamed Toubella, Marco Zunarelli, Tom Sleigh & Mark Perry	Test Dates:	10 May 2018 to 18 May 2018
Test Sample Serial Number:	C02W6002JTDV, C02VR00RJH93		

FCC Reference:	Parts 15.33, 15.205(a), 15.209(a) & 15.247(d)
ISED Canada Reference:	RSS-Gen 6.13 & 8.9 / RSS-247 5.5
Test Method Used:	ANSI C63.10 Sections 6.3, 6.5, 6.6, 11.11, 11.12.2.4 & 11.12.2.5.1, KDB 558074 Sections 11, 12.2.4 & 12.2.5.1
Frequency Range:	30 MHz to 26.5 GHz
Configuration:	<i>Bluetooth</i> Basic Rate top channel / 2.4 GHz WLAN (2Tx MIMO) bottom channel

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	36 to 44

Note(s):

1. All intermodulation products were below the noise floor level or greater than 20 dB from the specification limit.
2. The *Bluetooth* and 2.4 GHz WLAN fundamentals are shown on the 1 GHz to 3 GHz plot.
3. Pre-scans were made against the FCC Part 15 general limits for radiated emissions.
4. The test receiver resolution bandwidth was set to 120 kHz and video bandwidth to 500 kHz, for measurements below 1 GHz. For measurements above 1 GHz the resolution bandwidth was set to 1 MHz and video bandwidth to 3 MHz, with the sweep time set to auto. Markers were placed on the highest measured level.
5. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
6. Measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.





Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate top channel / 2.4 GHz WLAN (MIMO) bottom channel (continued)

Results: Peak





Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

Results: Average

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

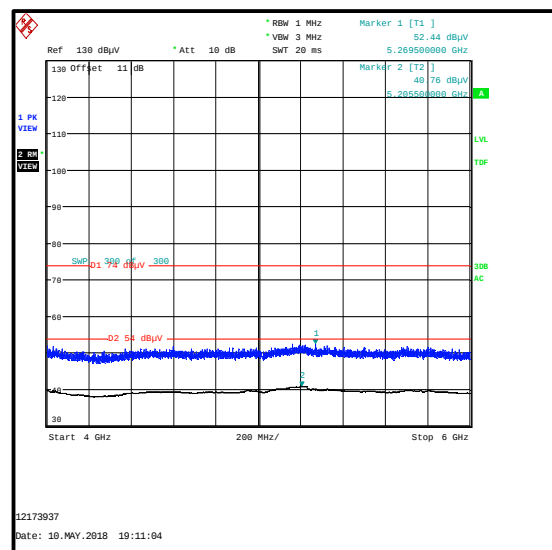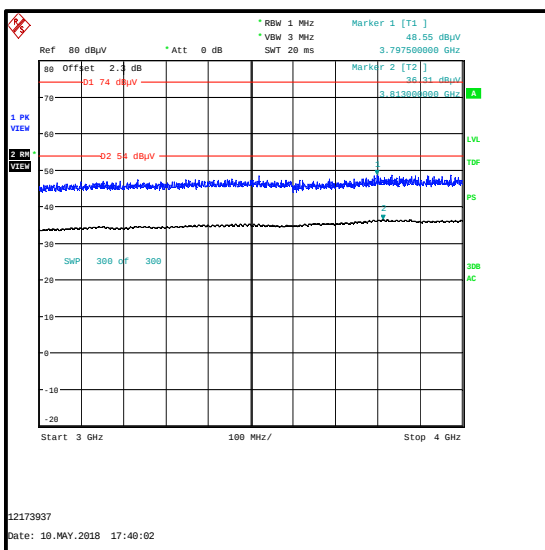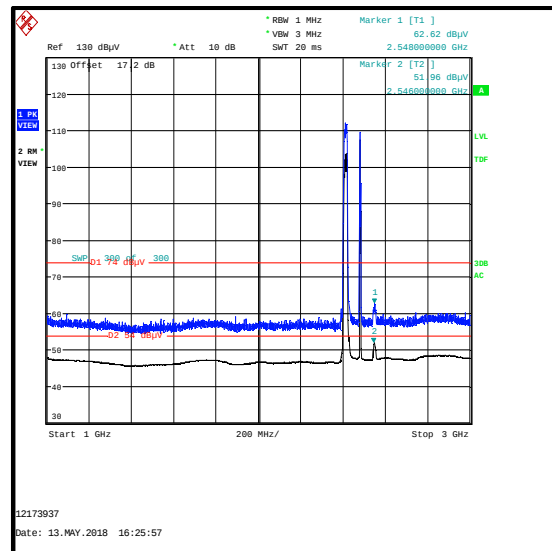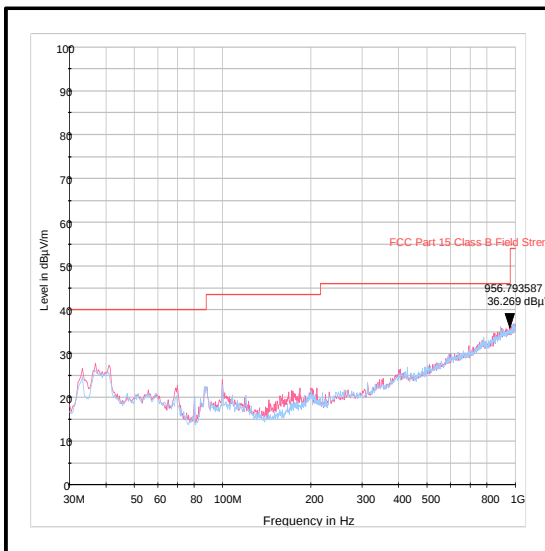

Transmitter Out of Band Radiated Emissions - Bluetooth Basic Rate top channel / 2.4 GHz WLAN (MIMO) bottom channel (continued)

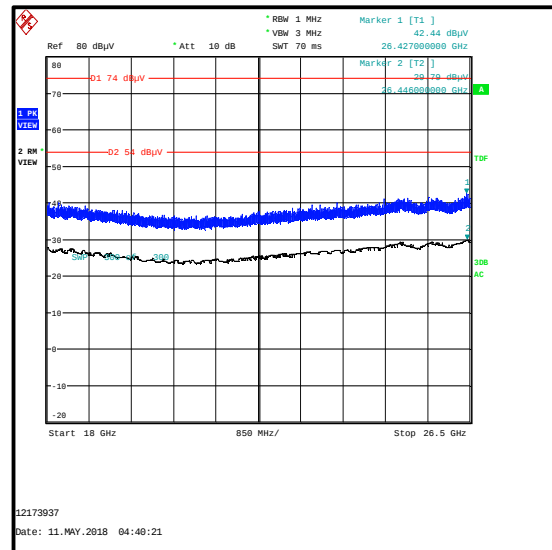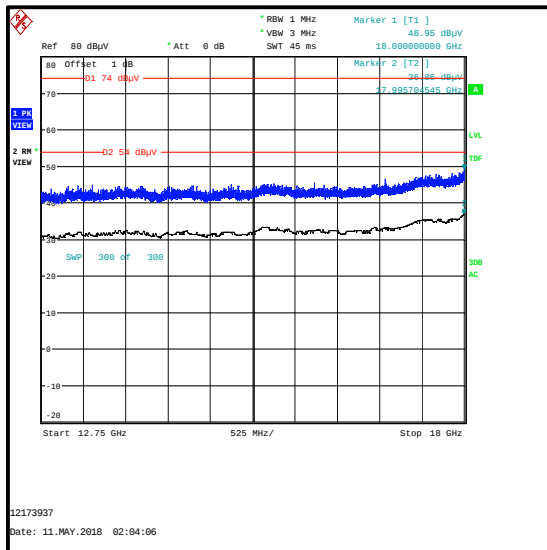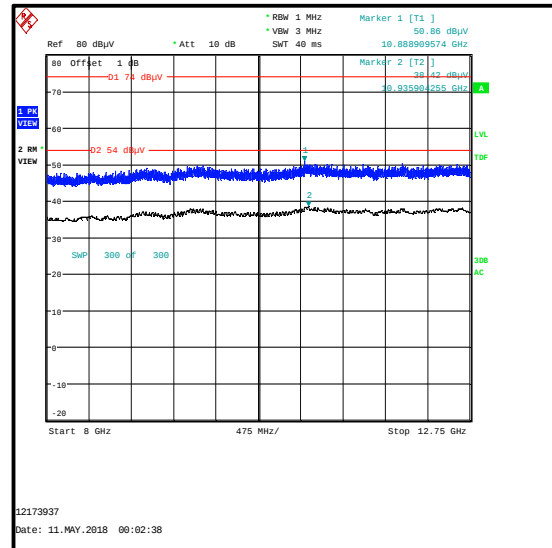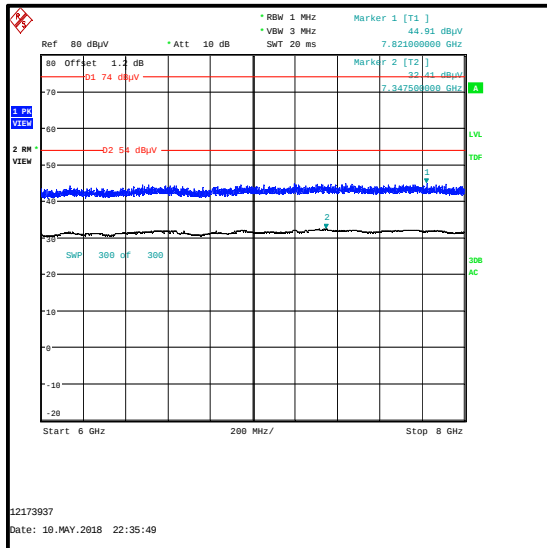

4.9. Transmitter Out of Band Radiated Emissions - *Bluetooth* LE bottom channel / 2.4 GHz WLAN (MIMO) top channel

Test Summary:

Test Engineers:	Mohamed Toubella, Marco Zunarelli, Tom Sleigh & Mark Perry	Test Dates:	10 May 2018 to 13 May 2018
Test Sample Serial Number:	C02W6002JTDV, C02VR00RJH93		

FCC Reference:	Parts 15.33, 15.205(a), 15.209(a) & 15.247(d)
ISED Canada Reference:	RSS-Gen 6.13 & 8.9 / RSS-247 5.5
Test Method Used:	ANSI C63.10 Sections 6.3, 6.5, 6.6, 11.11, 11.12.2.4 & 11.12.2.5.1, KDB 558074 Sections 11, 12.2.4 & 12.2.5.1
Frequency Range:	30 MHz to 26.5 GHz
Configuration:	<i>Bluetooth</i> LE bottom channel / 2.4 GHz WLAN (2Tx MIMO) top channel

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	36 to 44

Note(s):





1. All intermodulation products were below the noise floor level or greater than 20 dB from the specification limit.
2. The *Bluetooth* LE and 2.4 GHz WLAN fundamentals are shown on the 1 GHz to 3 GHz plot.
3. Pre-scans were made against the FCC Part 15 general limits for radiated emissions.
4. The test receiver resolution bandwidth was set to 120 kHz and video bandwidth to 500 kHz, for measurements below 1 GHz. For measurements above 1 GHz the resolution bandwidth was set to 1 MHz and video bandwidth to 3 MHz, with the sweep time set to auto. Markers were placed on the highest measured level.
5. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
6. Measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.





Transmitter Out of Band Radiated Emissions - Bluetooth LE bottom channel / 2.4 GHz WLAN (MIMO) top channel (continued)**Results: Peak**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

Results: Average

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

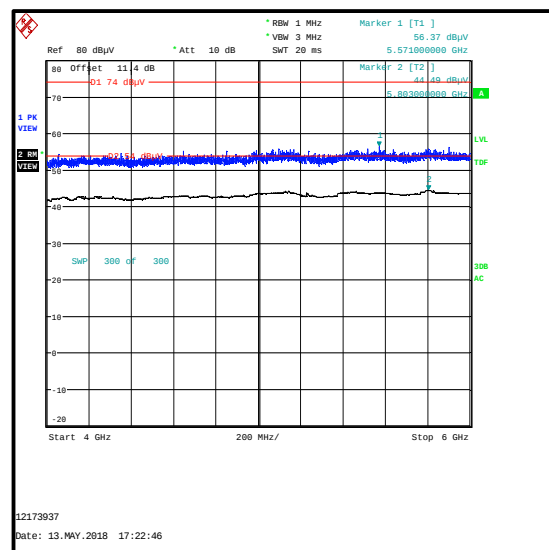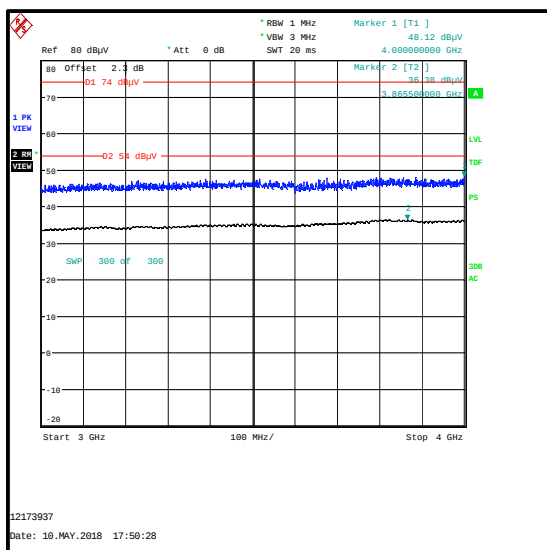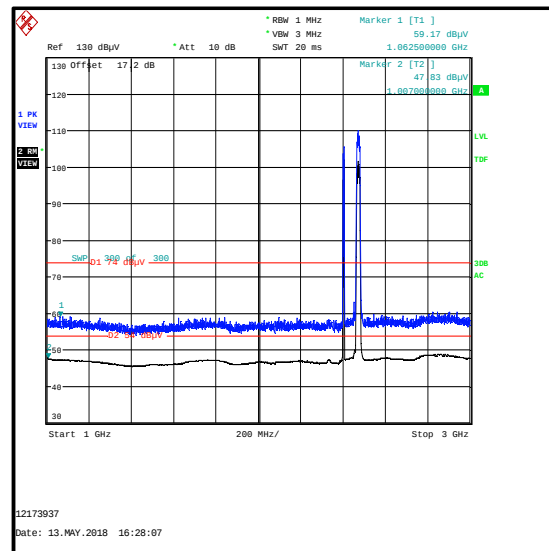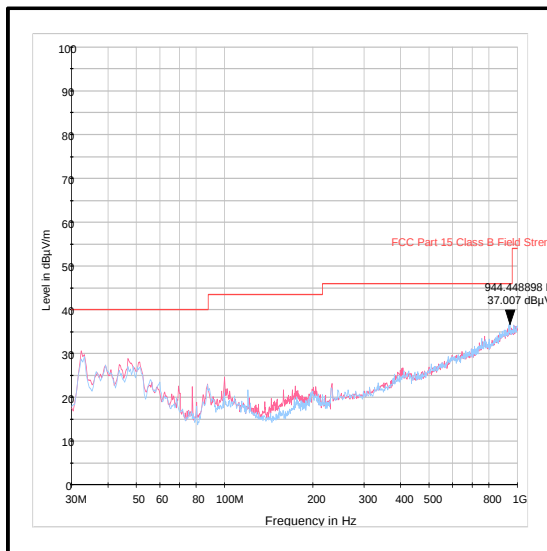

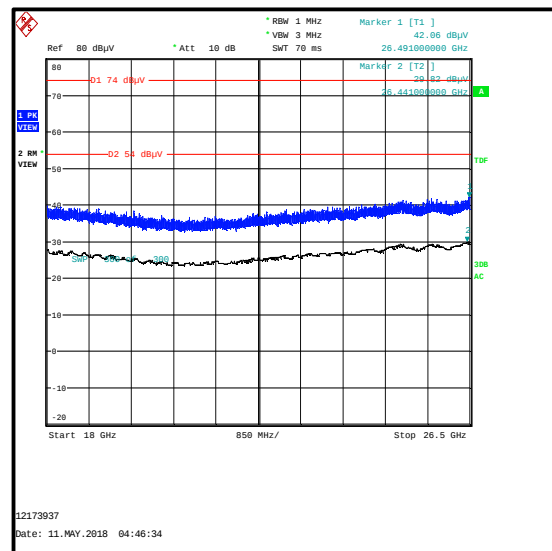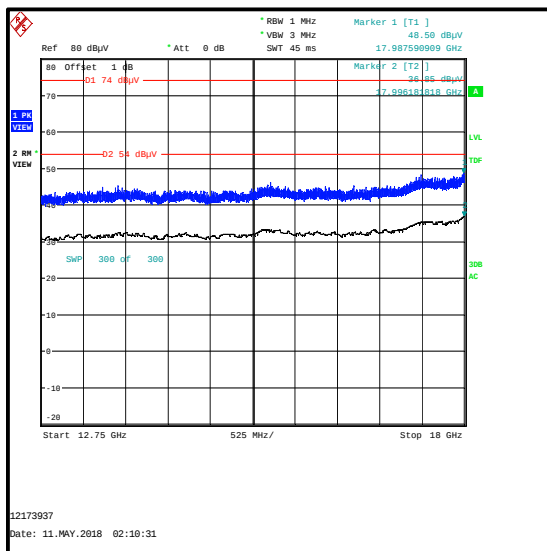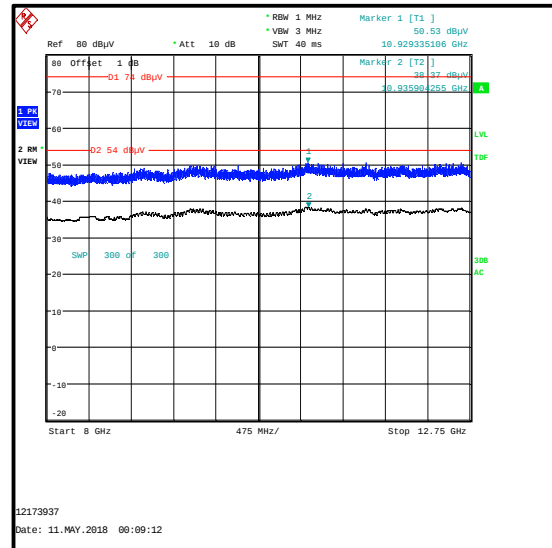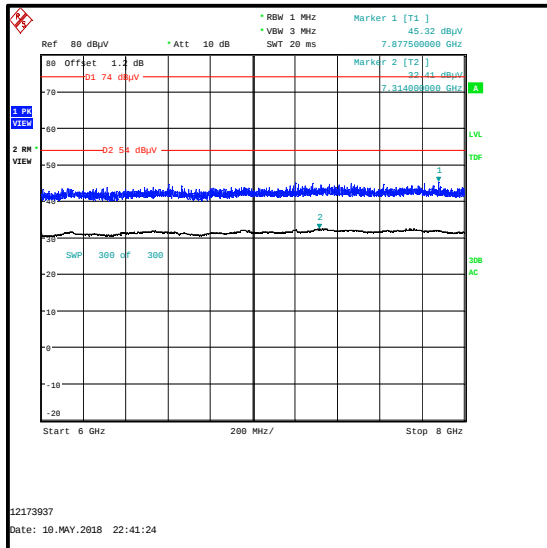Transmitter Out of Band Radiated Emissions - *Bluetooth* LE bottom channel / 2.4 GHz WLAN (MIMO) top channel (continued)

4.10. Transmitter Out of Band Radiated Emissions - Bluetooth LE top channel / 2.4 GHz WLAN (MIMO) bottom channel**Test Summary:**

Test Engineers:	Mohamed Toubella, Marco Zunarelli, Tom Sleigh & Mark Perry	Test Dates:	10 May 2018 to 18 May 2018
Test Sample Serial Number:	C02W6002JTDV, C02VR00RJH93		

FCC Reference:	Parts 15.33, 15.205(a), 15.209(a) & 15.247(d)
ISED Canada Reference:	RSS-Gen 6.13 & 8.9 / RSS-247 5.5
Test Method Used:	ANSI C63.10 Sections 6.3, 6.5, 6.6, 11.11, 11.12.2.4 & 11.12.2.5.1, KDB 558074 Sections 11, 12.2.4 & 12.2.5.1
Frequency Range:	30 MHz to 26.5 GHz
Configuration:	Bluetooth LE top channel / 2.4 GHz WLAN (2Tx MIMO) bottom channel

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	36 to 44

Note(s):

1. All intermodulation products were below the noise floor level or greater than 20 dB from the specification limit.
2. The Bluetooth LE and 2.4 GHz WLAN fundamentals are shown on the 1 GHz to 3 GHz plot.
3. Pre-scans were made against the FCC Part 15 general limits for radiated emissions.
4. The test receiver resolution bandwidth was set to 120 kHz and video bandwidth to 500 kHz, for measurements below 1 GHz. For measurements above 1 GHz the resolution bandwidth was set to 1 MHz and video bandwidth to 3 MHz, with the sweep time set to auto. Markers were placed on the highest measured level.
5. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
6. Measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.





Transmitter Out of Band Radiated Emissions - *Bluetooth* LE top channel / 2.4 GHz WLAN (MIMO) bottom channel (continued)





Results: Peak

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

Results: Average

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

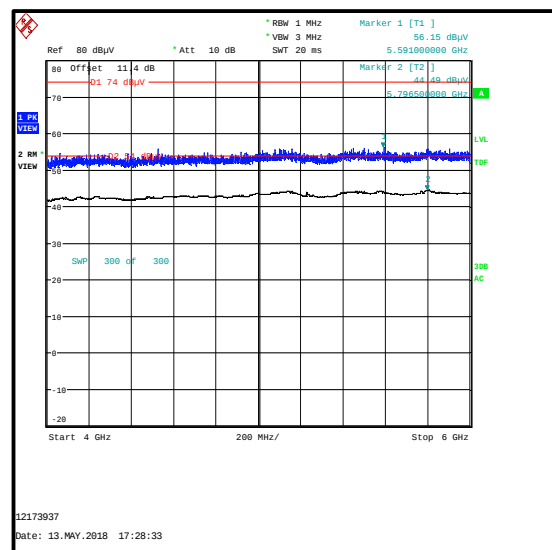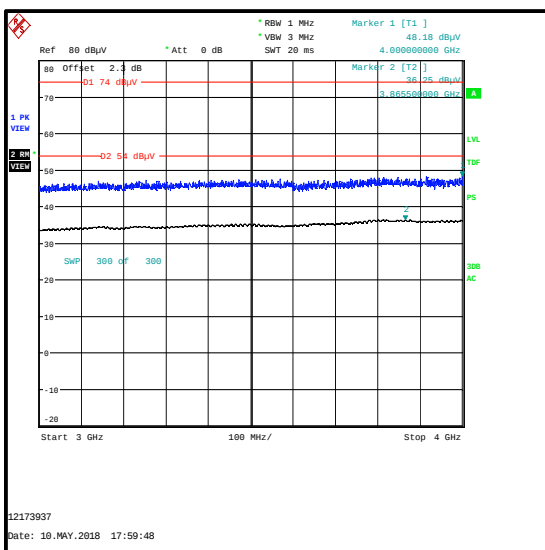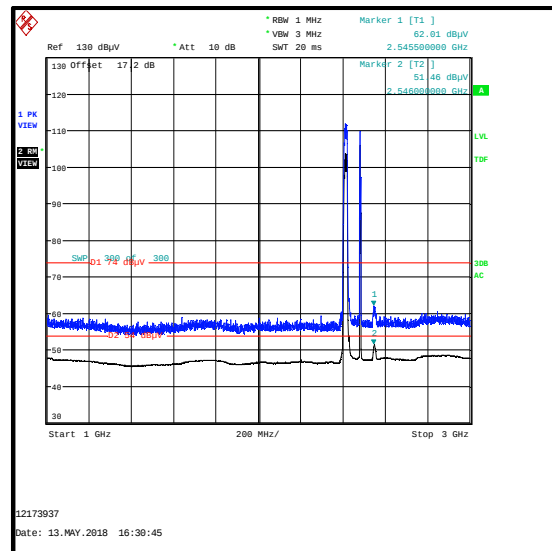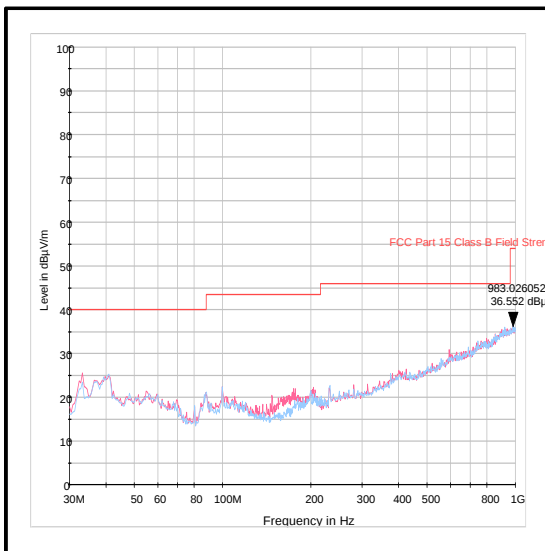

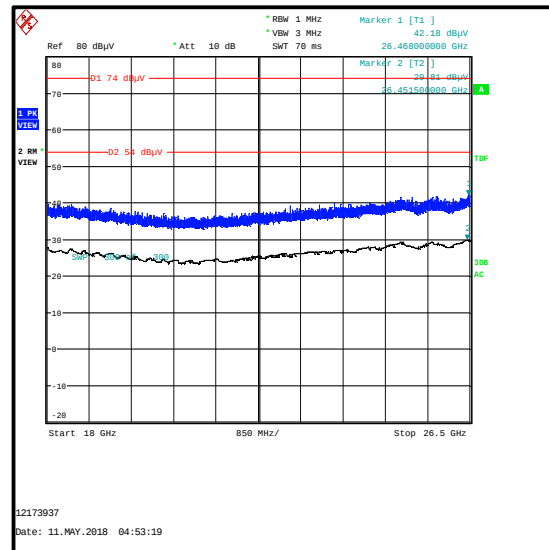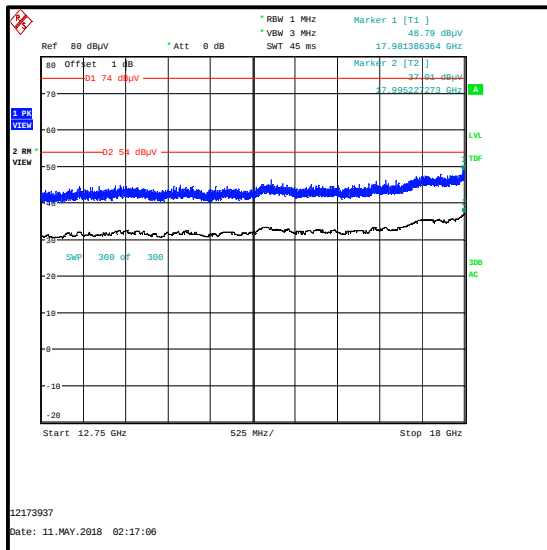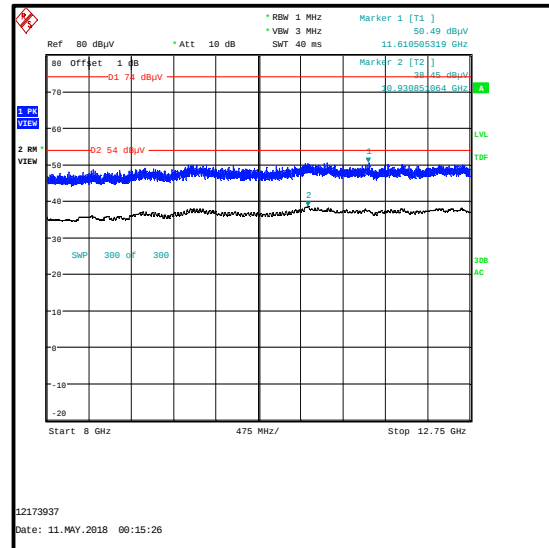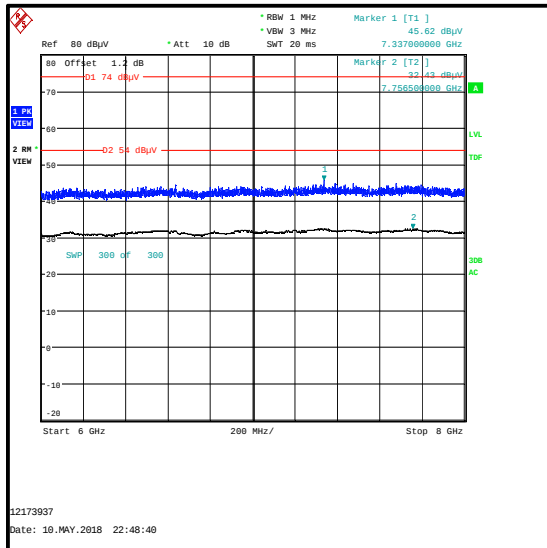Transmitter Out of Band Radiated Emissions - *Bluetooth* LE top channel / 2.4 GHz WLAN (MIMO) bottom channel (continued)

4.11. Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate bottom channel / 2.4 GHz WLAN (MIMO) top channel / 5 GHz WLAN (SISO) bottom channel

Test Summary:

Test Engineers:	Mohamed Toubella, Marco Zunarelli, Tom Sleigh & Mark Perry	Test Dates:	24 April 2018 to 03 May 2018
Test Sample Serial Number:	C02W6002JTDV, C02VR00RJH93		

FCC Reference:	Parts 15.33, 15.205(a), 15.209(a), 15.247(d) & 15.407(b)
ISED Canada Reference:	RSS-Gen 6.13 & 8.9 / RSS-247 5.5, 6.2.1.2
Test Method Used:	ANSI C63.10 Sections 6.3, 6.5, 6.6, 11.11, 11.12.2.4 & 11.12.2.5.1, KDB 558074 Sections 11, 12.2.4, 12.2.5.1, 12.7, KDB 789033 II.G
Frequency Range:	30 MHz to 40 GHz
Configuration:	<i>Bluetooth</i> Basic Rate bottom channel / 2.4 GHz WLAN (2Tx MIMO) top channel / 5 GHz WLAN (SISO) bottom channel

Environmental Conditions:

Temperature (°C):	23 to 24
Relative Humidity (%):	40 to 46

Note(s):

1. All intermodulation products were below the noise floor level or greater than 20 dB from the specification limit.
2. The *Bluetooth* and 2.4 GHz WLAN fundamentals are shown on the 1 GHz to 3 GHz plot.
3. The 5 GHz WLAN fundamental is shown on the 4 GHz to 6 GHz plot.
4. Pre-scans were made against the FCC Part 15 general limits for radiated emissions.
5. The test receiver resolution bandwidth was set to 120 kHz and video bandwidth to 500 kHz, for measurements below 1 GHz. For measurements above 1 GHz the resolution bandwidth was set to 1 MHz and video bandwidth to 3 MHz, with the sweep time set to auto. Markers were placed on the highest measured level.
6. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
7. Measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.





Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate bottom channel / 2.4 GHz WLAN (MIMO) top channel / 5 GHz WLAN (SISO) bottom channel (continued)





Results: Peak

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
See note 1					


Results: Average

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

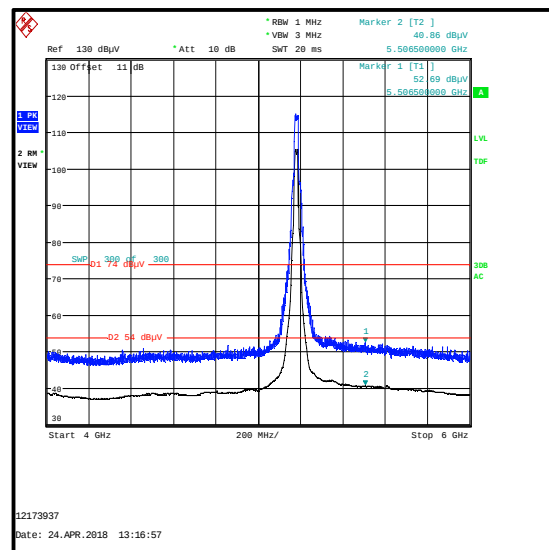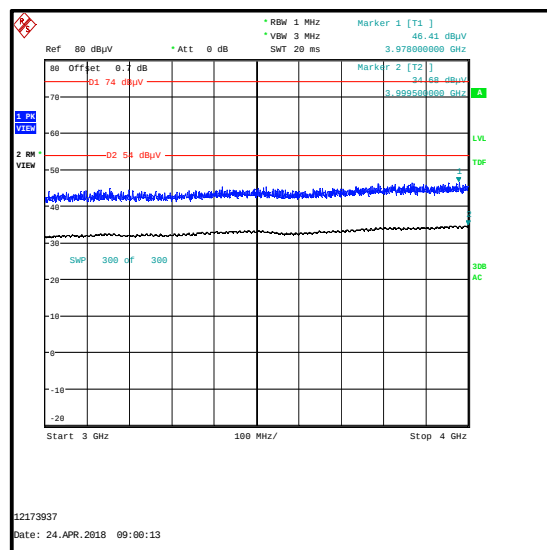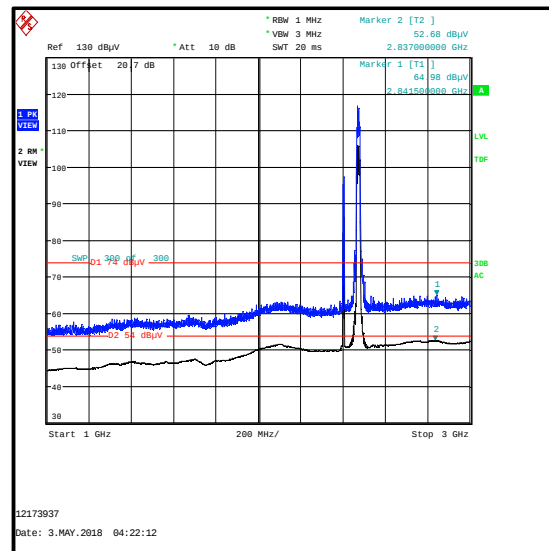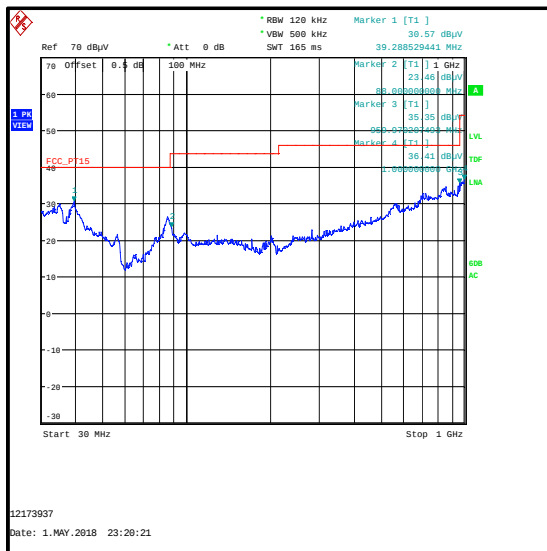

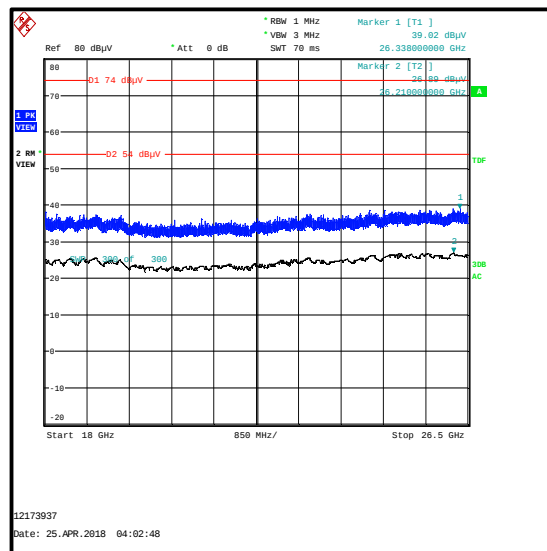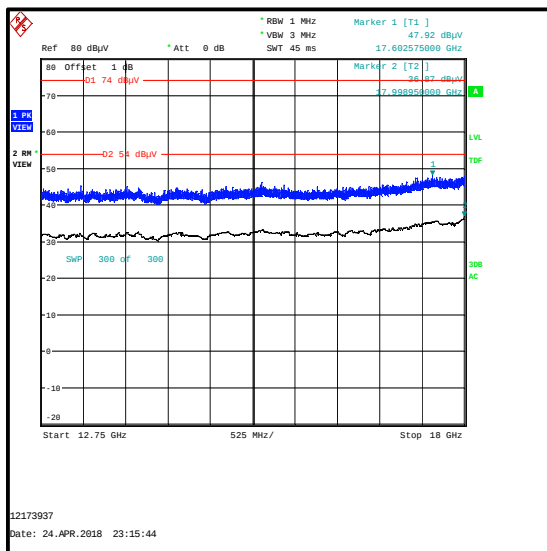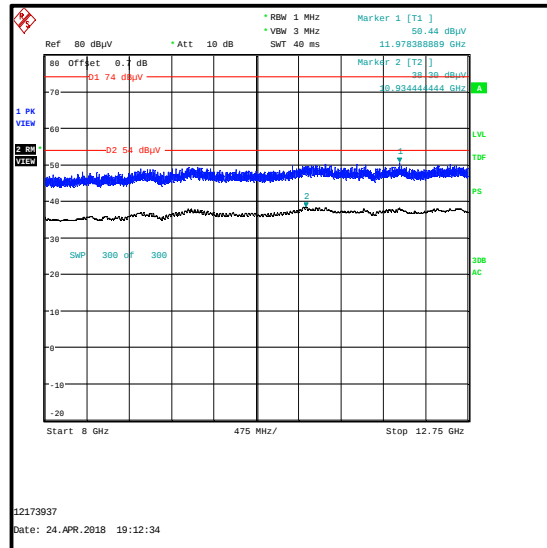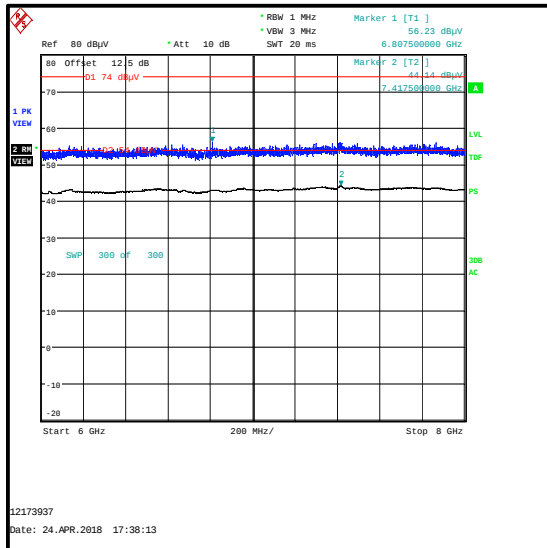Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate bottom channel / 2.4 GHz WLAN (MIMO) top channel / 5 GHz WLAN (SISO) bottom channel (continued)

Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate bottom channel / 2.4 GHz WLAN (MIMO) top channel / 5 GHz WLAN (SISO) bottom channel (continued)

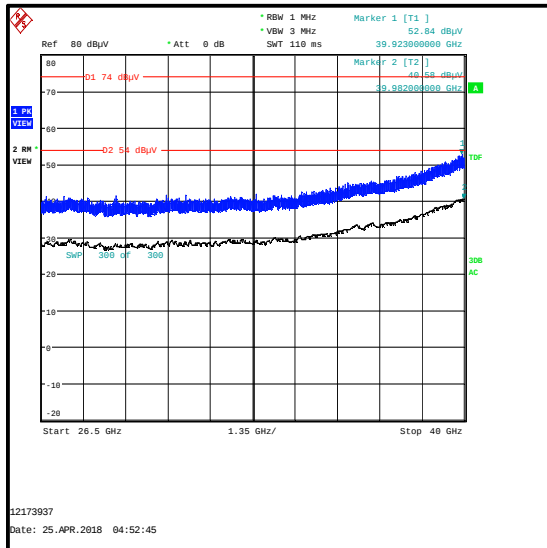

4.12. Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate bottom channel / 2.4 GHz WLAN (MIMO) top channel / 5 GHz WLAN (SISO) top channel

Test Summary:

Test Engineers:	Mohamed Toubella, Marco Zunarelli, Tom Sleight & Mark Perry	Test Dates:	27 April 2018 to 13 May 2018
Test Sample Serial Number:	C02W6002JTDV, C02VR00RJH93		

FCC Reference:	Parts 15.33, 15.205(a), 15.209(a), 15.247(d) & 15.407(b)
ISED Canada Reference:	RSS-Gen 6.13 & 8.9 / RSS-247 5.5, 6.2.4.2
Test Method Used:	ANSI C63.10 Sections 6.3, 6.5, 6.6, 11.11, 11.12.2.4 & 11.12.2.5.1 KDB 558074 Sections 11, 12.2.4, 12.2.5.1, 12.7, KDB 789033 II.G
Frequency Range:	30 MHz to 40 GHz
Configuration:	<i>Bluetooth</i> Basic Rate bottom channel / 2.4 GHz WLAN (2Tx MIMO) top channel / 5 GHz WLAN (SISO) top channel

Environmental Conditions:

Temperature (°C):	20 to 24
Relative Humidity (%):	36 to 50

Note(s):

1. All intermodulation products were below the noise floor level or greater than 20 dB from the specification limit.
2. The *Bluetooth* and 2.4 GHz WLAN fundamentals are shown on the 1 GHz to 3 GHz plot.
3. The 5 GHz WLAN fundamental is shown on the 4 GHz to 6 GHz plot.
4. Pre-scans were made against the FCC Part 15 general limits for radiated emissions.
5. The emission at approximately 5098.000 MHz is not an intermodulation product and was therefore not measured.
6. The emission at approximately 4944.000 MHz is the second harmonic of the 2.4GHz WLAN signal and was therefore not measured.
7. The test receiver resolution bandwidth was set to 120 kHz and video bandwidth to 500 kHz, for measurements below 1 GHz. For measurements above 1 GHz the resolution bandwidth was set 1 MHz and video bandwidth to 3 MHz, with the sweep time set to auto. Markers were placed on the highest measured level.
8. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
9. Measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.





Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate bottom channel / 2.4 GHz WLAN (MIMO) top channel / 5 GHz WLAN (SISO) top channel (continued)





Results: Peak

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
See note 1					


Results: Average

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

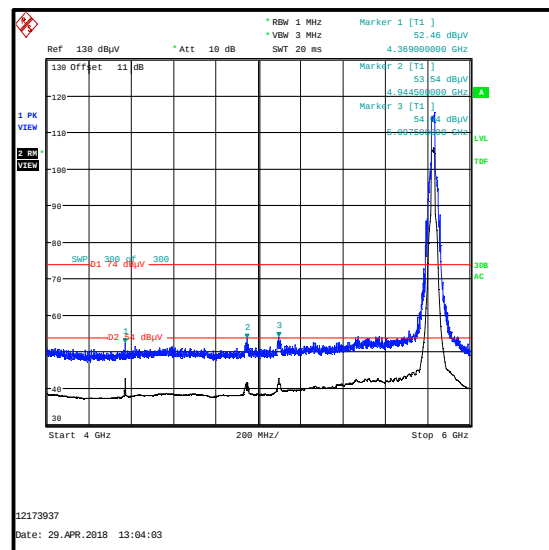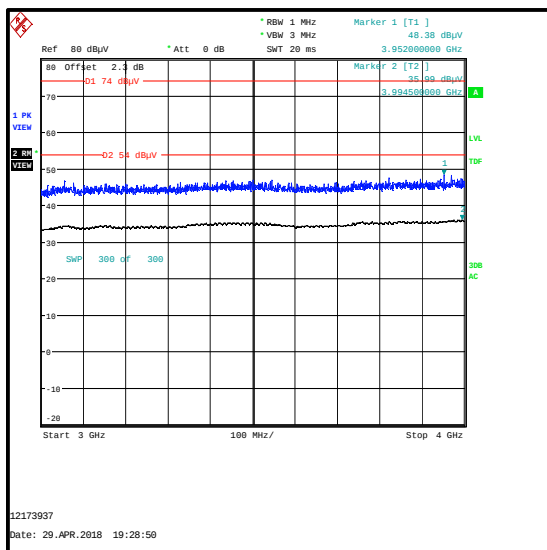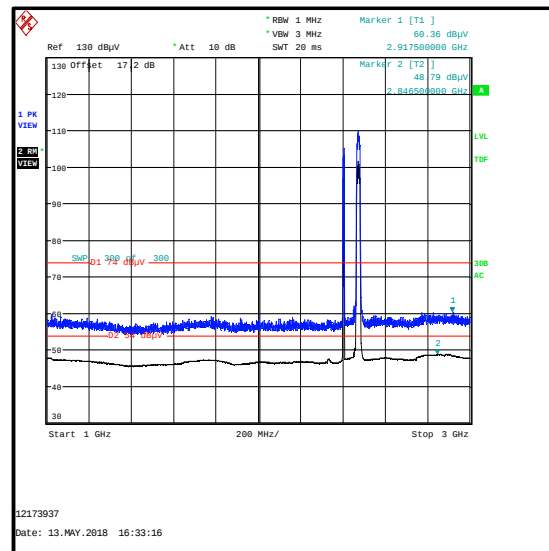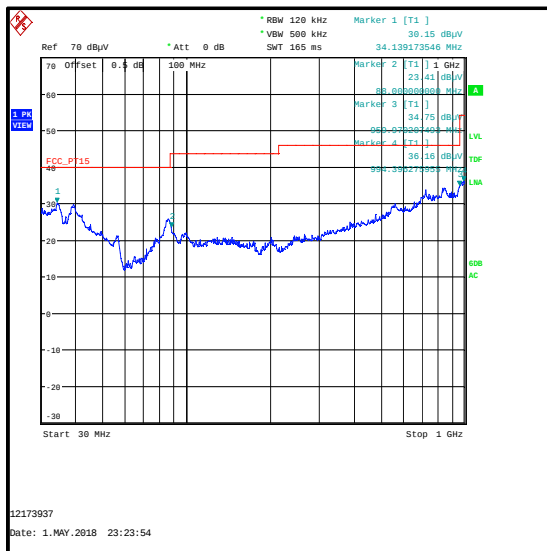

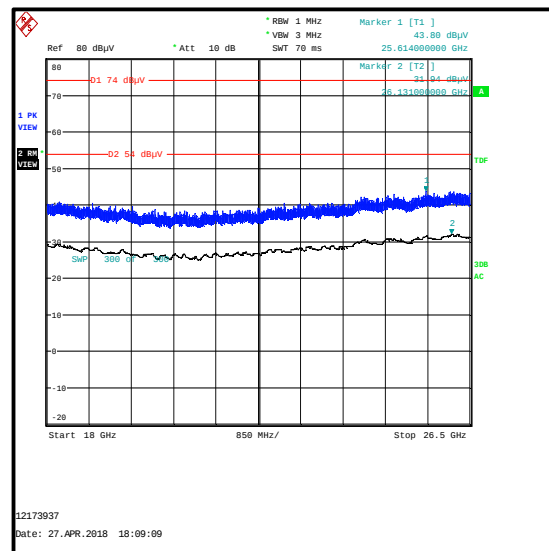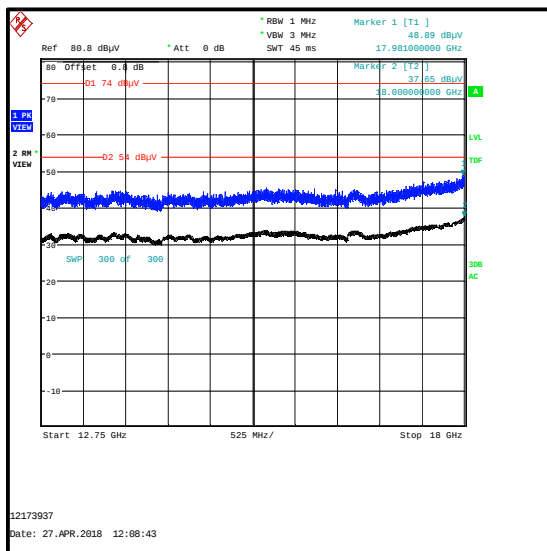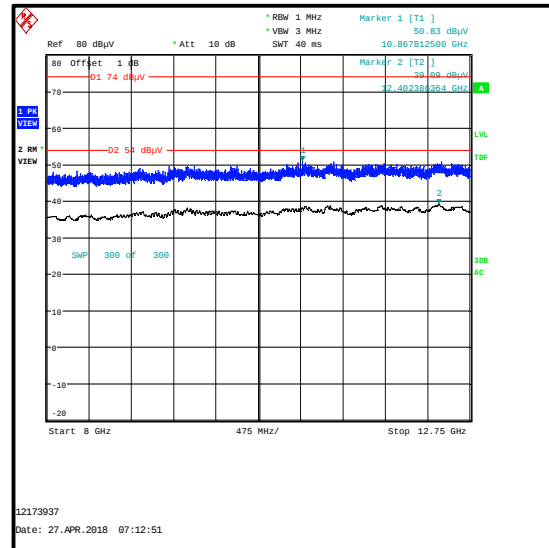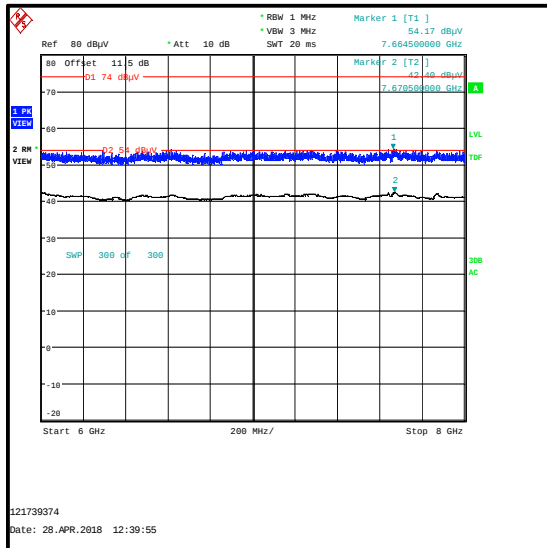Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate bottom channel / 2.4 GHz WLAN (MIMO) top channel / 5 GHz WLAN (SISO) top channel (continued)

**Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate bottom channel / 2.4 GHz
WLAN (MIMO) top channel / 5 GHz WLAN (SISO) top channel (continued)**

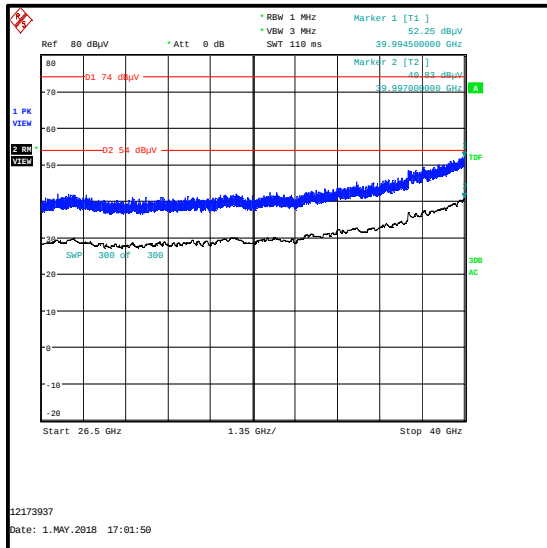

4.13. Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate top channel / 2.4 GHz WLAN (MIMO) bottom channel / 5 GHz WLAN (SISO) bottom channel

Test Summary:

Test Engineers:	Mohamed Toubella, Marco Zunarelli, Tom Sleigh & Mark Perry	Test Dates:	27 April 2018 to 18 May 2018
Test Sample Serial Number:	C02W6002JTDV, C02VR00RJH93		

FCC Reference:	Parts 15.33, 15.205(a), 15.209(a), 15.247(d) & 15.407(b)
ISED Canada Reference:	RSS-Gen 6.13 & 8.9 / RSS-247 5.5, 6.2.1.2
Test Method Used:	ANSI C63.10 Sections 6.3, 6.5, 6.6, 11.11, 11.12.2.4 & 11.12.2.5.1, KDB 558074 Sections 11, 12.2.4, 12.2.5.1, 12.7, KDB 789033 II.G
Frequency Range:	30 MHz to 40 GHz
Configuration:	<i>Bluetooth</i> Basic Rate top channel / 2.4 GHz WLAN (2Tx MIMO) bottom channel / 5 GHz WLAN (SISO) bottom channel

Environmental Conditions:

Temperature (°C):	20 to 24
Relative Humidity (%):	36 to 50

Note(s):

1. All intermodulation products were below the noise floor level or greater than 20 dB from the specification limit.
2. The *Bluetooth* and 2.4 GHz WLAN fundamentals are shown on the 1 GHz to 3 GHz plot.
3. The 5 GHz WLAN fundamental is shown on the 4 GHz to 6 GHz plot.
4. Pre-scans were made against the FCC Part 15 general limits for radiated emissions.
5. The emission at approximately 7236.000 MHz is the third harmonic of the 2.4GHz WLAN signal and was therefore not measured.
6. The test receiver resolution bandwidth was set to 120 kHz and video bandwidth to 500 kHz, for measurements below 1 GHz. For measurements above 1 GHz the resolution bandwidth was set to 1 MHz and video bandwidth to 3 MHz, with the sweep time set to auto. Markers were placed on the highest measured level.
7. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
8. Measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.





Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate top channel / 2.4 GHz WLAN (MIMO) bottom channel / 5 GHz WLAN (SISO) bottom channel (continued)





Results: Peak

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
234.813	Vertical	60.4	74	13.6	Complied


Results: Average

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
234.276	Vertical	46.2	54	7.8	Complied

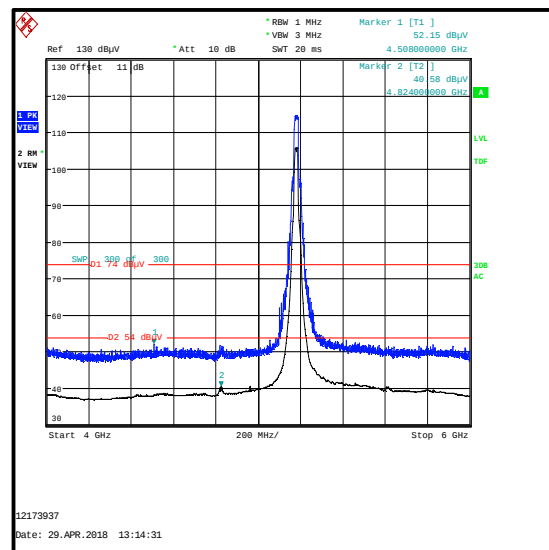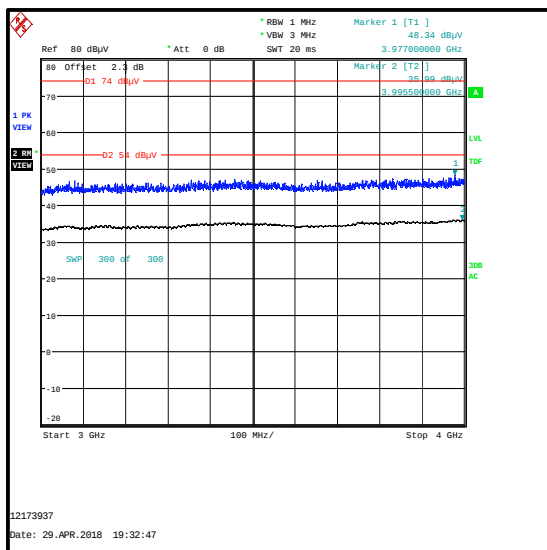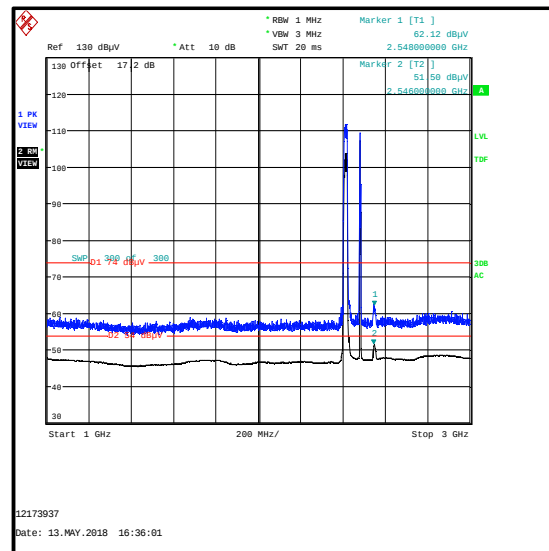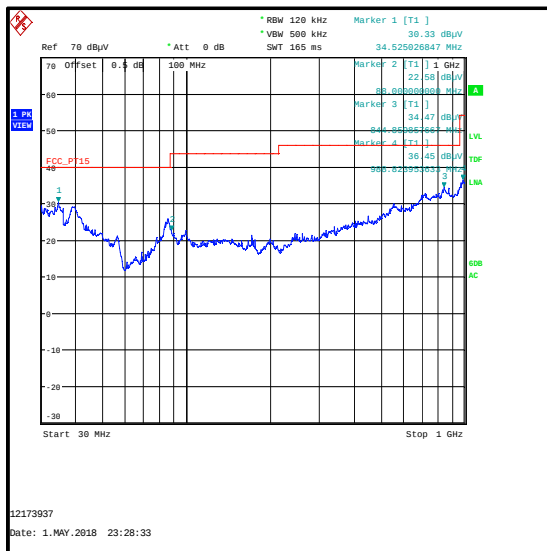

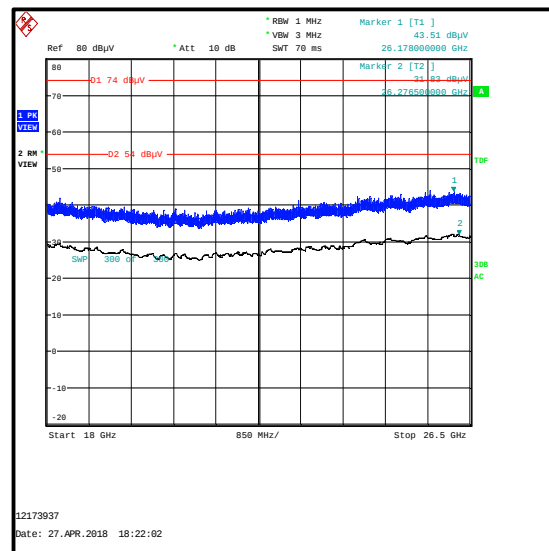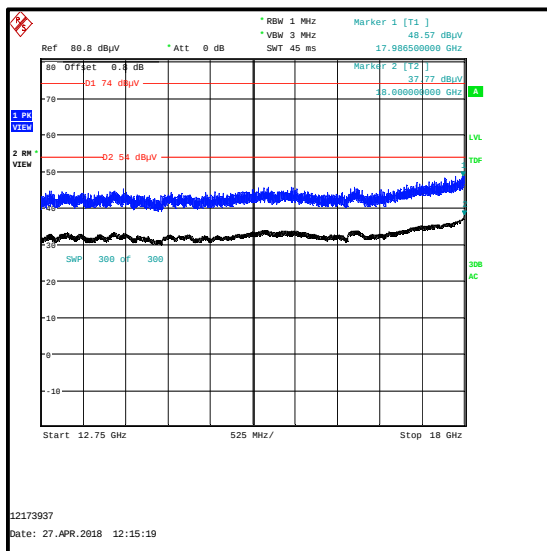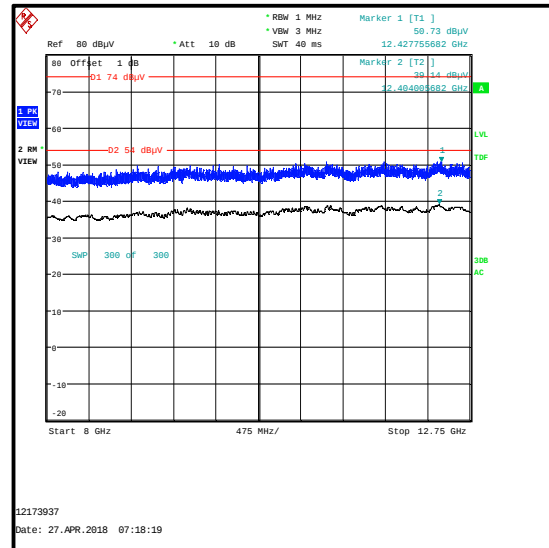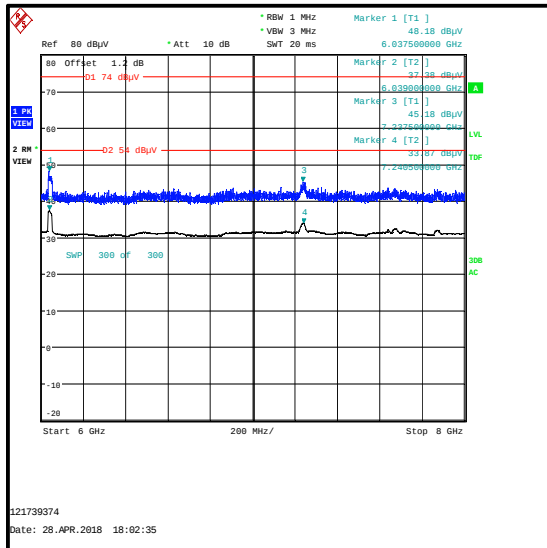**Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate top channel / 2.4 GHz
WLAN (MIMO) bottom channel / 5 GHz WLAN (SISO) bottom channel (continued)**

**Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate top channel / 2.4 GHz
WLAN (MIMO) bottom channel / 5 GHz WLAN (SISO) bottom channel (continued)**

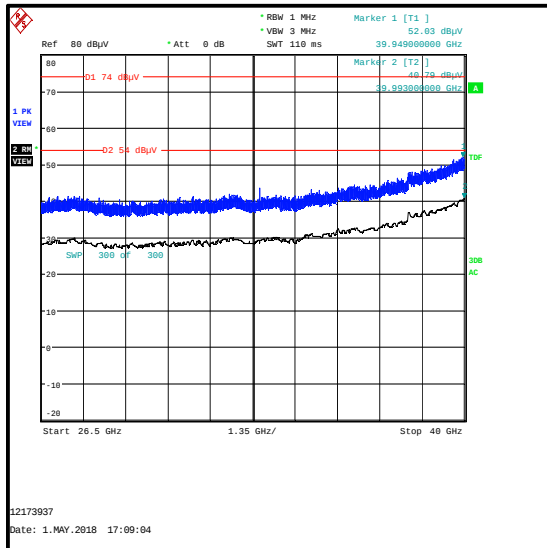

4.14. Transmitter Out of Band Radiated Emissions - Bluetooth Basic Rate top channel / 2.4 GHz WLAN (MIMO) bottom channel / 5 GHz WLAN (SISO) top channel

Test Summary:

Test Engineers:	Mohamed Toubella, Marco Zunarelli, Tom Sleigh & Mark Perry	Test Dates:	24 April 2018 to 13 May 2018
Test Sample Serial Number:	C02W6002JTDV, C02VR00RJH93		

FCC Reference:	Parts 15.33, 15.205(a), 15.209(a), 15.247(d) & 15.407(b)
ISED Canada Reference:	RSS-Gen 6.13 & 8.9 / RSS-247 5.5, 6.2.4.2
Test Method Used:	ANSI C63.10 Sections 6.3, 6.5, 6.6, 11.11, 11.12.2.4 & 11.12.2.5.1, KDB 558074 Sections 11, 12.2.4, 12.2.5.1, 12.7 KDB 789033 II.G
Frequency Range:	30 MHz to 40 GHz
Configuration:	Bluetooth Basic Rate top channel / 2.4 GHz WLAN (2Tx MIMO) bottom channel / 5 GHz WLAN (SISO) top channel

Environmental Conditions:

Temperature (°C):	20 to 24
Relative Humidity (%):	36 to 50

Note(s):





1. All intermodulation products were below the noise floor level or greater than 20 dB from the specification limit.
2. The Bluetooth and 2.4 GHz WLAN fundamentals are shown on the 1 GHz to 3 GHz plot.
3. The 5 GHz WLAN fundamental is shown on the 4 GHz to 6 GHz plot.
4. Pre-scans were made against the FCC Part 15 general limits for radiated emissions.
5. The emission at approximately 7236.000 MHz is the third harmonic of the 2.4 GHz WLAN signal, and was therefore not measured.
6. The test receiver resolution bandwidth was set to 120 kHz and video bandwidth to 500 kHz, for measurements below 1 GHz. For measurements above 1 GHz the resolution bandwidth was set to 1 MHz and video bandwidth to 3 MHz, with the sweep time set to auto. Markers were placed on the highest measured level.
7. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
8. Measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.





Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate top channel / 2.4 GHz WLAN (MIMO) bottom channel / 5 GHz WLAN (SISO) top channel (continued)**Results: Peak**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
See note 1					


Results: Average

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

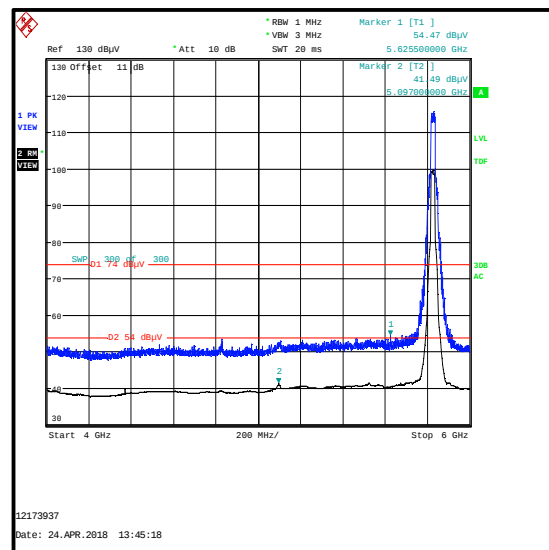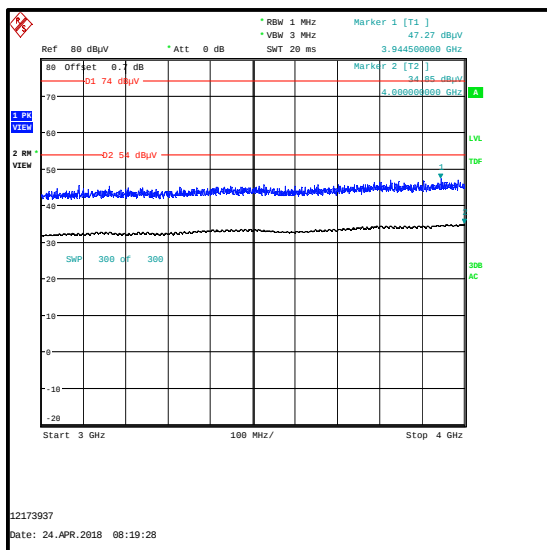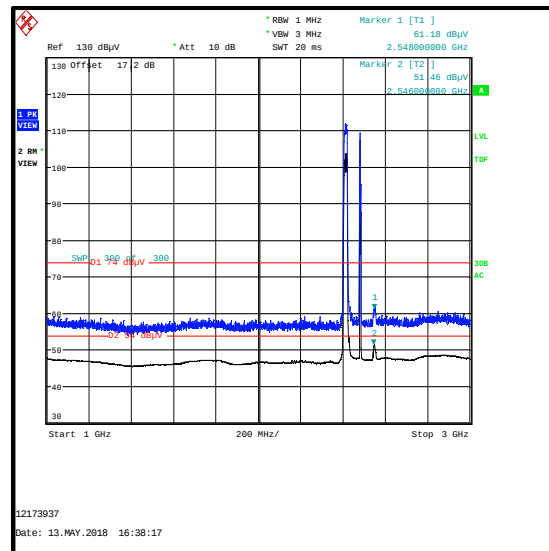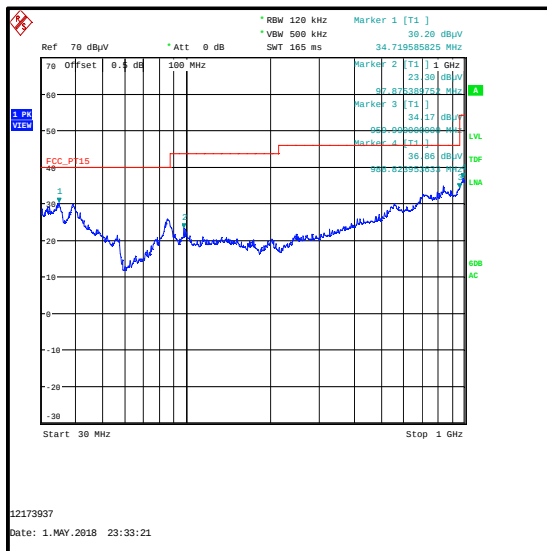

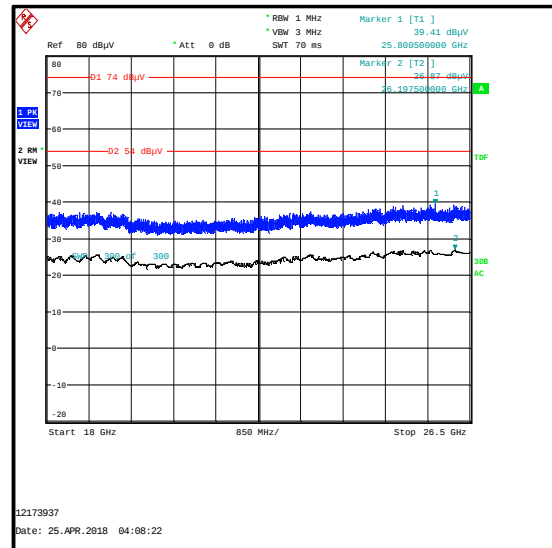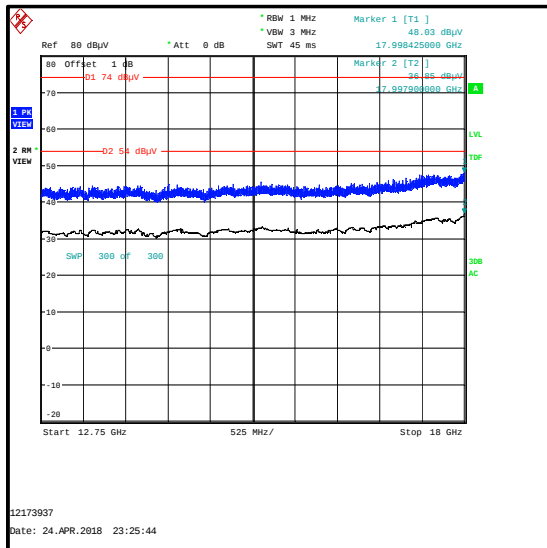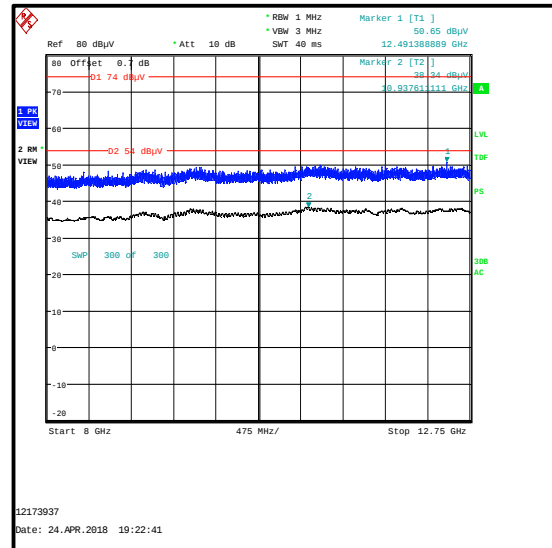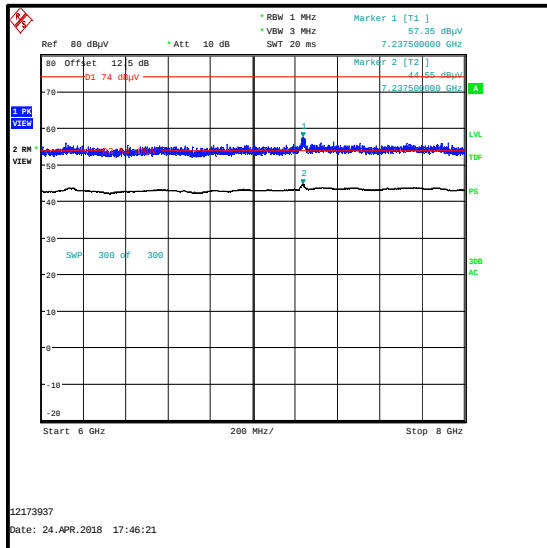**Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate top channel / 2.4 GHz
WLAN (MIMO) bottom channel / 5 GHz WLAN (SISO) top channel (continued)**

**Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate top channel / 2.4 GHz
WLAN (MIMO) bottom channel / 5 GHz WLAN (SISO) top channel (continued)**

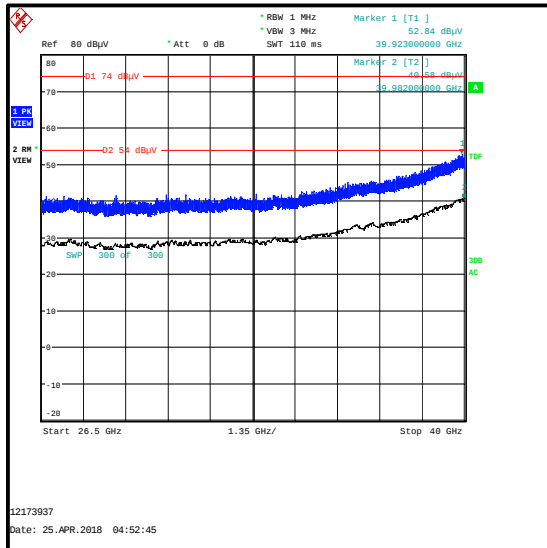

4.15. Transmitter Out of Band Radiated Emissions - Bluetooth LE bottom channel / 2.4 GHz WLAN (MIMO) top channel / 5 GHz WLAN (SISO) bottom channel

Test Summary:

Test Engineers:	Mohamed Toubella, Marco Zunarelli, Tom Sleight & Mark Perry	Test Dates:	27 April 2018 to 19 May 2018
Test Sample Serial Number:	C02W6002JTDV, C02VR00RJH93		

FCC Reference:	Parts 15.33, 15.205(a), 15.209(a), 15.247(d) & 15.407(b)
ISED Canada Reference:	RSS-Gen 6.13 & 8.9 / RSS-247 5.5, 6.2.1.2
Test Method Used:	ANSI C63.10 Sections 6.3, 6.5, 6.6, 11.11, 11.12.2.4 & 11.12.2.5.1, KDB 558074 Sections 11, 12.2.4, 12.2.5.1, 12.7, KDB 789033 II.G
Frequency Range:	30 MHz to 40 GHz
Configuration:	Bluetooth LE bottom channel / 2.4 GHz WLAN (2Tx MIMO) top channel / 5 GHz WLAN (SISO) bottom channel

Environmental Conditions:

Temperature (°C):	20 to 24
Relative Humidity (%):	36 to 47

Note(s):





1. All intermodulation products were below the noise floor level or greater than 20 dB from the specification limit.
2. The Bluetooth LE and 2.4 GHz WLAN fundamentals are shown on the 1 GHz to 3 GHz plot.
3. The 5 GHz WLAN fundamental is shown on the 4 GHz to 6 GHz plot.
4. Pre-scans were made against the FCC Part 15 general limits for radiated emissions.
5. The emission at approximately 4944.000 MHz is the second harmonic of the 2.4GHz WLAN signal and was therefore not measured
6. The emission at approximately 6037.000 MHz is not an intermodulation product and was therefore not measured.
7. The test receiver resolution bandwidth was set to 120 kHz and video bandwidth to 500 kHz, for measurements below 1 GHz. For measurements above 1 GHz the resolution bandwidth was set to 1 MHz and video bandwidth to 3 MHz, with the sweep time set to auto. Markers were placed on the highest measured level.
8. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
9. Measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.





Transmitter Out of Band Radiated Emissions - Bluetooth LE bottom channel / 2.4 GHz WLAN (MIMO) top channel / 5 GHz WLAN (SISO) bottom channel (continued)**Results: Peak**


Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

Results: Average

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

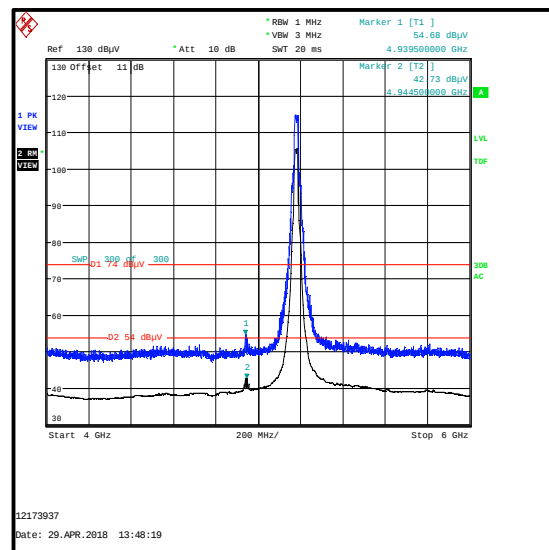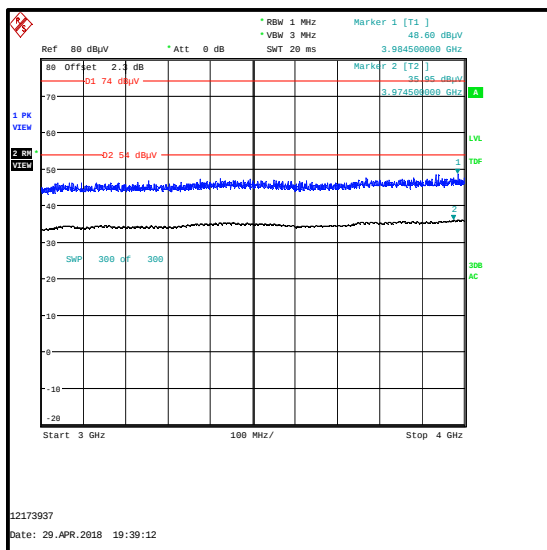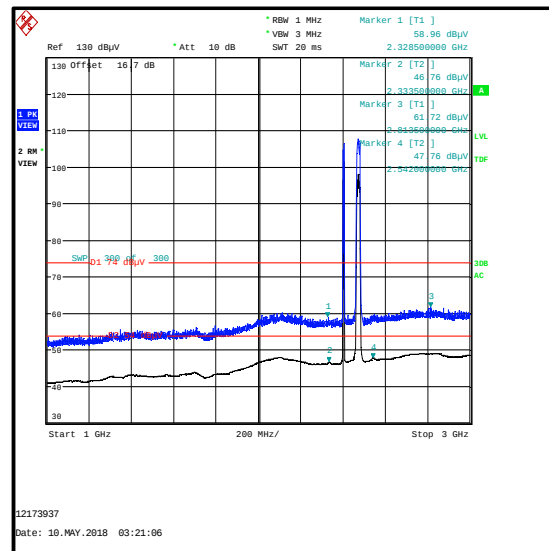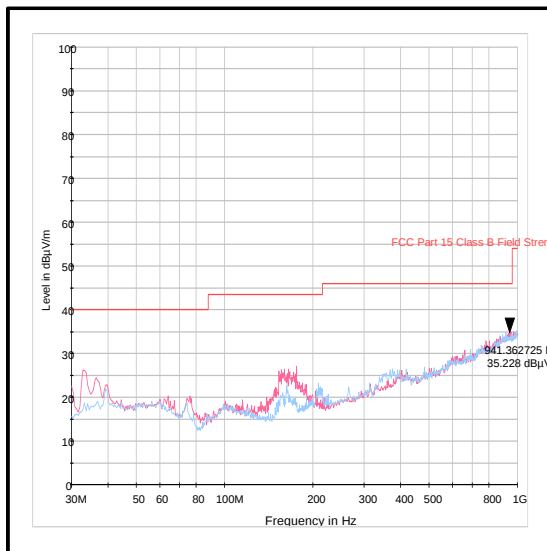

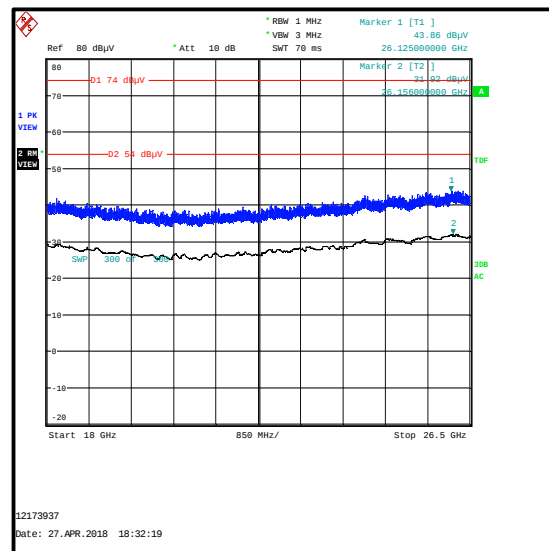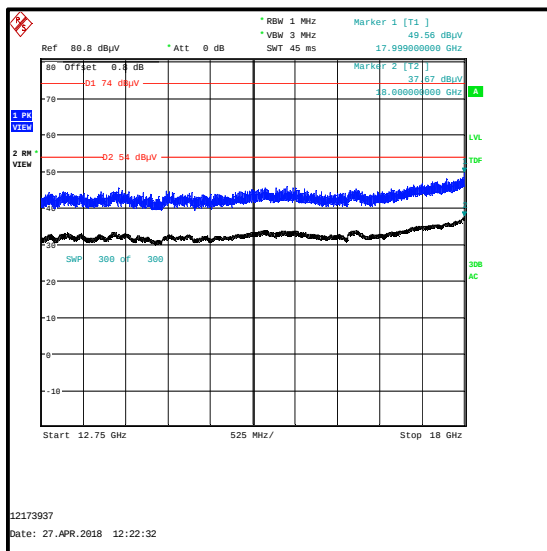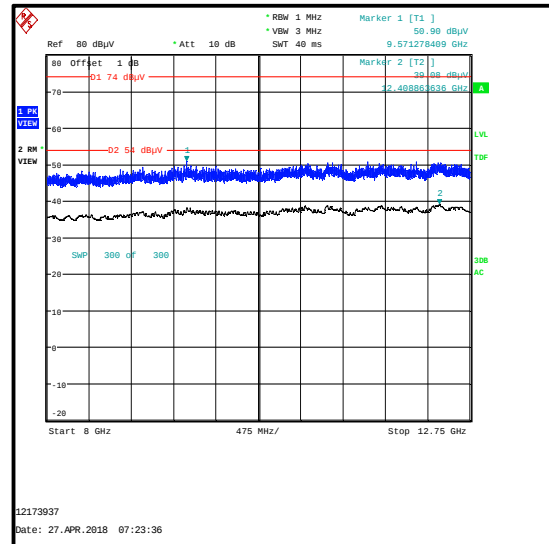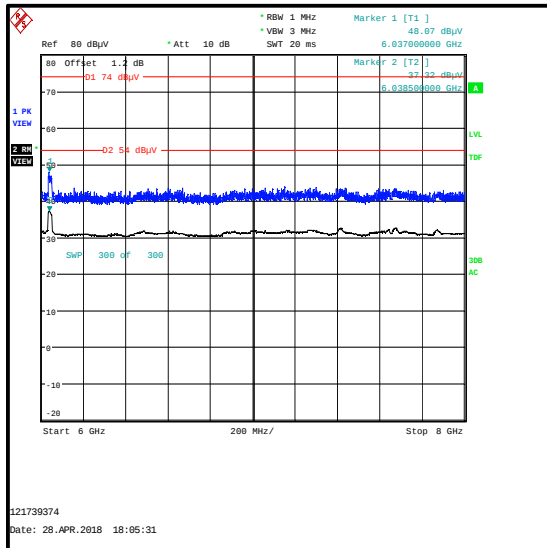Transmitter Out of Band Radiated Emissions - *Bluetooth* LE bottom channel / 2.4 GHz WLAN (MIMO) top channel / 5 GHz WLAN (SISO) bottom channel (continued)

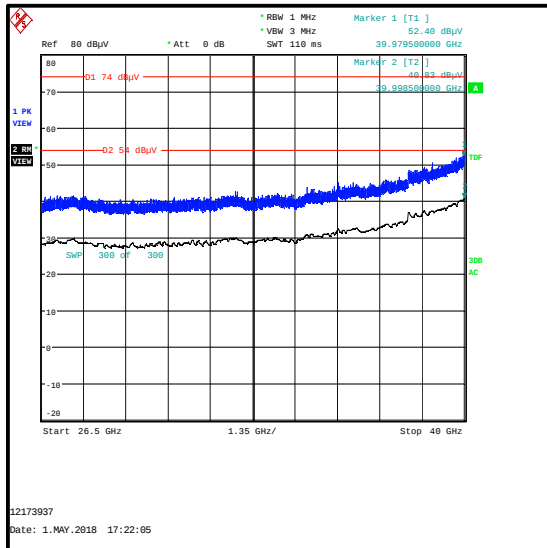Transmitter Out of Band Radiated Emissions - Bluetooth LE bottom channel / 2.4 GHz WLAN (MIMO) top channel / 5 GHz WLAN (SISO) bottom channel (continued)

4.16. Transmitter Out of Band Radiated Emissions - Bluetooth LE bottom channel / 2.4 GHz WLAN (MIMO) top channel / 5 GHz WLAN (SISO) top channel

Test Summary:

Test Engineers:	Mohamed Toubella, Marco Zunarelli, Tom Sleight & Mark Perry	Test Dates:	27 April 2018 to 10 May 2018
Test Sample Serial Number:	C02W6002JTDV, C02VR00RJH93		

FCC Reference:	Parts 15.33, 15.205(a), 15.209(a), 15.247(d) & 15.407(b)
ISED Canada Reference:	RSS-Gen 6.13 & 8.9 / RSS-247 5.5, 6.2.4.2
Test Method Used:	ANSI C63.10 Sections 6.3, 6.5, 6.6, 11.11, 11.12.2.4 & 11.12.2.5.1, KDB 558074 Sections 11, 12.2.4, 12.2.5.1, 12.7 KDB 789033 II.G
Frequency Range:	30 MHz to 40 GHz
Configuration:	Bluetooth LE bottom channel / 2.4 GHz WLAN (2Tx MIMO) top channel / 5 GHz WLAN (SISO) top channel

Environmental Conditions:

Temperature (°C):	20 to 24
Relative Humidity (%):	36 to 47

Note(s):





1. All intermodulation products were below the noise floor level or greater than 20 dB from the specification limit.
2. The Bluetooth LE and 2.4 GHz WLAN fundamentals are shown on the 1 GHz to 3 GHz plot.
3. The 5 GHz WLAN fundamental is shown on the 4 GHz to 6 GHz plot.
4. Pre-scans were made against the FCC Part 15 general limits for radiated emissions.
5. The emission at approximately 4944.000 MHz is the second harmonic of the 2.4GHz WLAN signal and was therefore not measured.
6. The emissions at approximately 4369.000 MHz and 5097.000 MHz are not intermodulation products and were therefore not measured.
7. The test receiver resolution bandwidth was set to 120 kHz and video bandwidth to 500 kHz, for measurements below 1 GHz. For measurements above 1 GHz the resolution bandwidth was set to 1 MHz and video bandwidth to 3 MHz, with the sweep time set to auto. Markers were placed on the highest measured level.
8. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
9. Measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.





Transmitter Out of Band Radiated Emissions - Bluetooth LE bottom channel / 2.4 GHz WLAN (MIMO) top channel / 5 GHz WLAN (SISO) top channel (continued)**Results: Peak**


Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

Results: Average

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

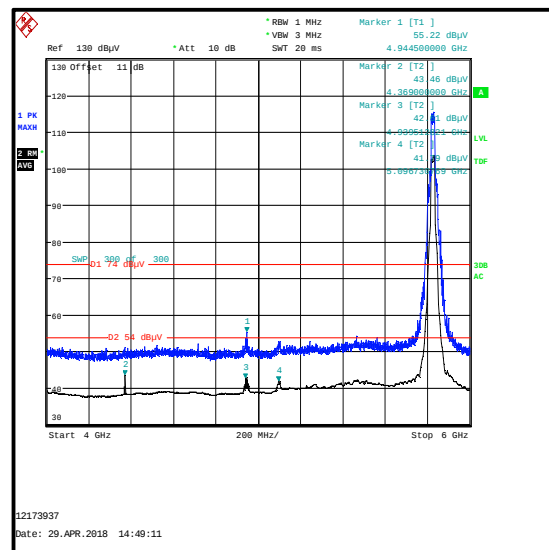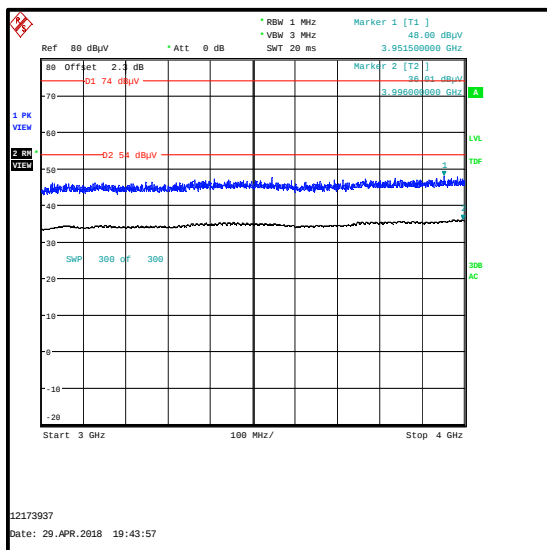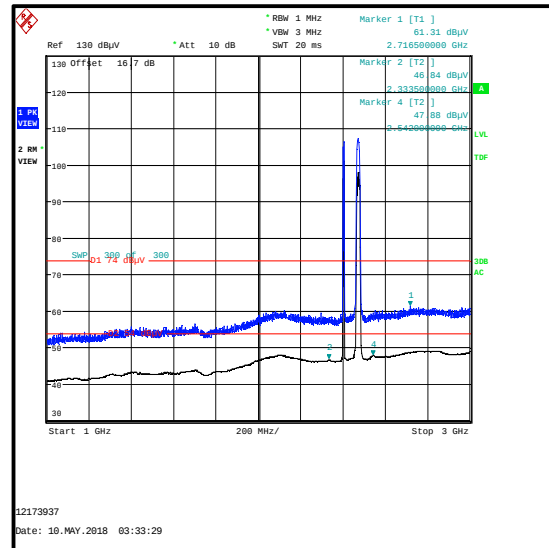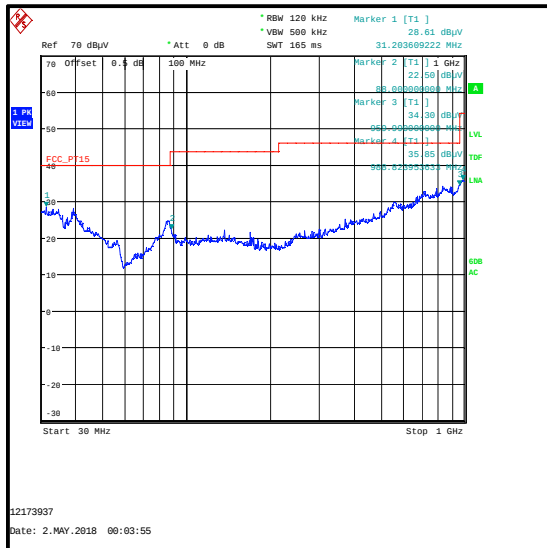

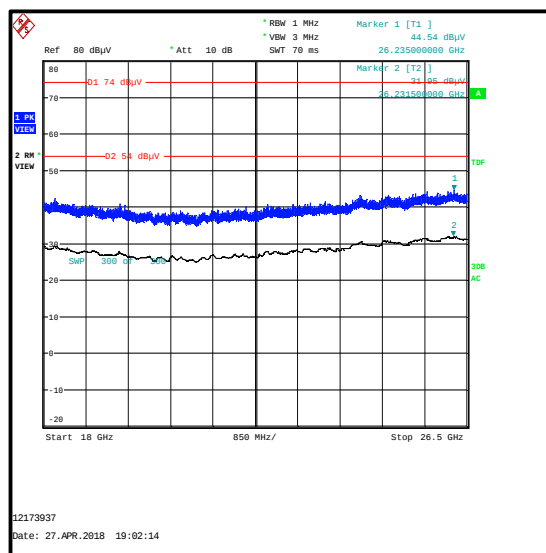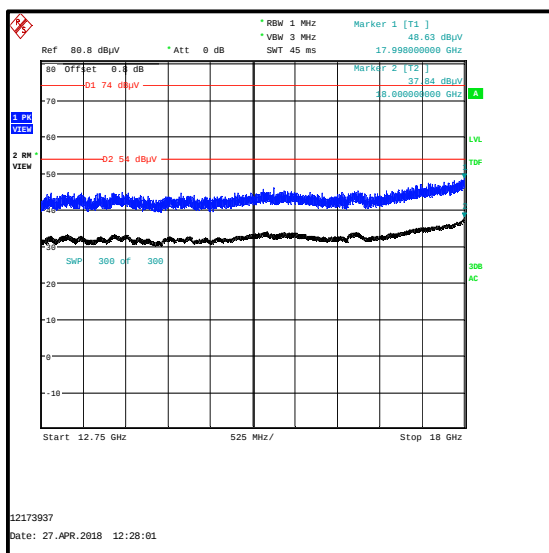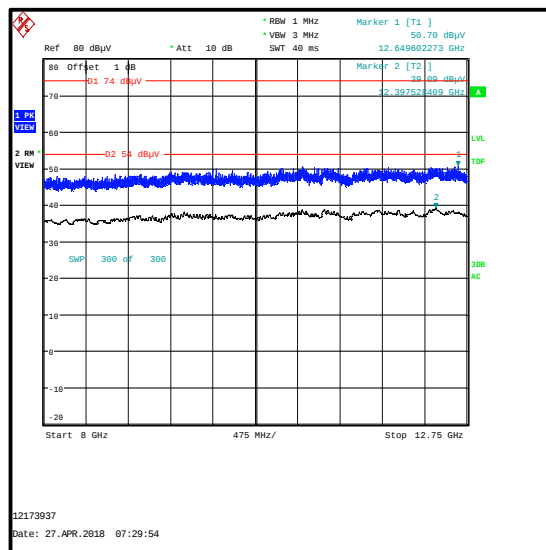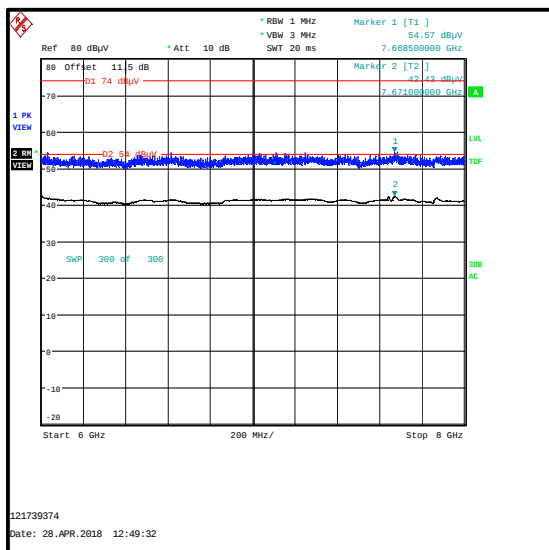Transmitter Out of Band Radiated Emissions - *Bluetooth* LE bottom channel / 2.4 GHz WLAN (MIMO) top channel / 5 GHz WLAN (SISO) top channel (continued)

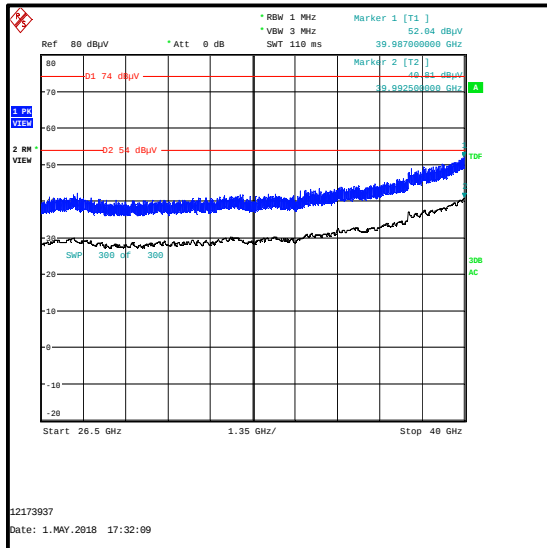Transmitter Out of Band Radiated Emissions - Bluetooth LE bottom channel / 2.4 GHz WLAN (MIMO) top channel / 5 GHz WLAN (SISO) top channel (continued)

4.17. Transmitter Out of Band Radiated Emissions - Bluetooth LE top channel / 2.4 GHz WLAN (MIMO) bottom channel / 5 GHz WLAN (SISO) bottom channel

Test Summary:

Test Engineers:	Mohamed Toubella, Marco Zunarelli, Tom Sleigh & Mark Perry	Test Dates:	27 April 2018 to 13 May 2018
Test Sample Serial Number:	C02W6002JTDV, C02VR00RJH93		

FCC Reference:	Parts 15.33, 15.205(a), 15.209(a), 15.247(d) & 15.407(b)
ISED Canada Reference:	RSS-Gen 6.13 & 8.9 / RSS-247 5.5, 6.2.1.2
Test Method Used:	ANSI C63.10 Sections 6.3, 6.5, 6.6, 11.11, 11.12.2.4 & 11.12.2.5.1, KDB 558074 Sections 11, 12.2.4, 12.2.5.1, 12.7 KDB 789033 II.G
Frequency Range:	30 MHz to 40 GHz
Configuration:	Bluetooth LE top channel / 2.4 GHz WLAN (2Tx MIMO) bottom channel / 5 GHz WLAN (SISO) bottom channel

Environmental Conditions:

Temperature (°C):	20 to 24
Relative Humidity (%):	36 to 50

Note(s):





1. All intermodulation products were below the noise floor level or greater than 20 dB from the specification limit.
2. The Bluetooth LE and 2.4 GHz WLAN fundamentals are shown on the 1 GHz to 3 GHz plot.
3. The 5 GHz WLAN fundamental is shown on the 4 GHz to 6 GHz plot.
4. Pre-scans were made against the FCC Part 15 general limits for radiated emissions.
5. The emissions at approximately 4824.000 MHz and 7236.000 MHz are the second and third harmonics of the 2.4 GHz WLAN signal and were therefore not measured.
6. The test receiver resolution bandwidth was set to 120 kHz and video bandwidth to 500 kHz, for measurements below 1 GHz. For measurements above 1 GHz the resolution bandwidth was set to 1 MHz and video bandwidth to 3 MHz, with the sweep time set to auto. Markers were placed on the highest measured level.
7. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
8. Measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.





Transmitter Out of Band Radiated Emissions - Bluetooth LE top channel / 2.4 GHz WLAN (MIMO) bottom channel / 5 GHz WLAN (SISO) bottom channel (continued)**Results: Peak**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
See note 1					


Results: Average

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

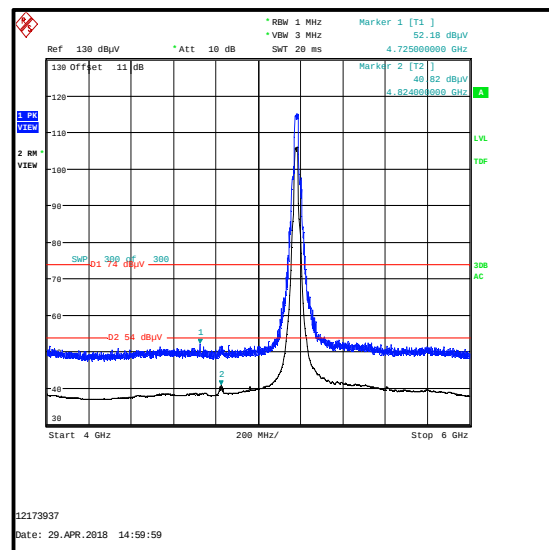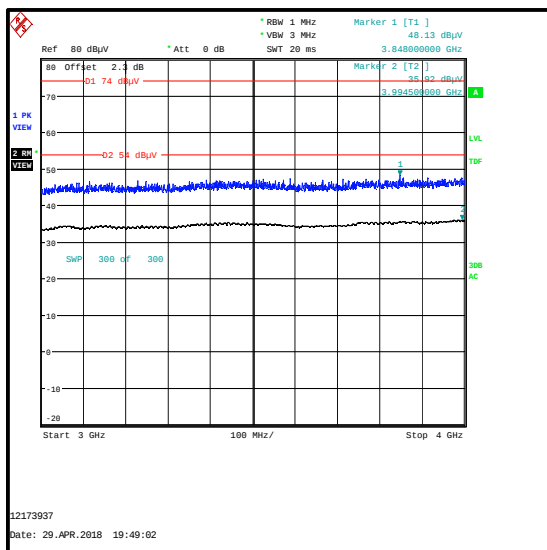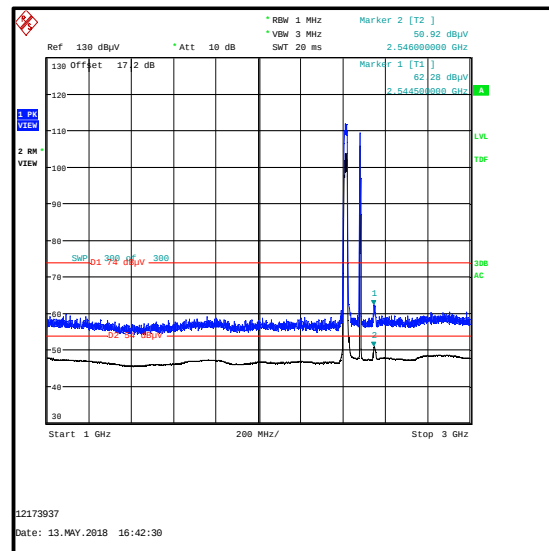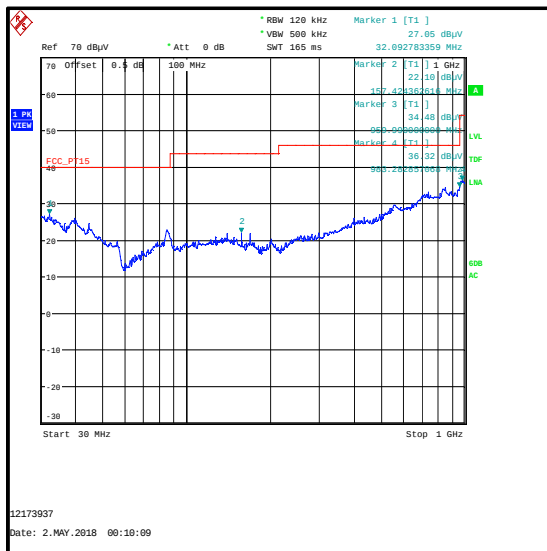

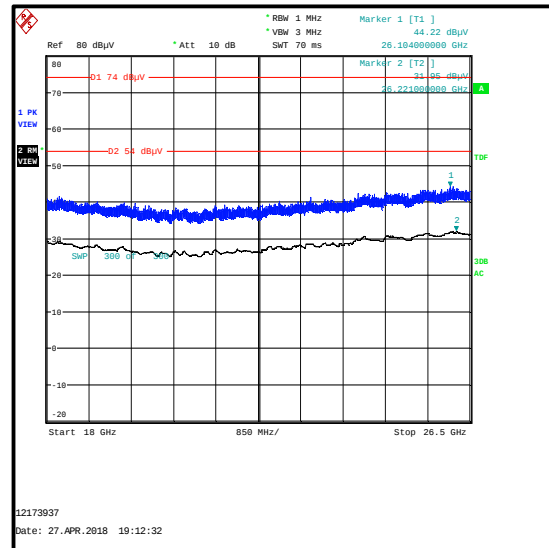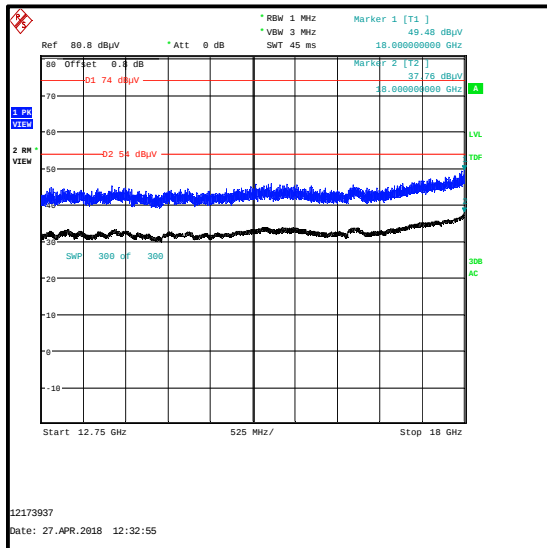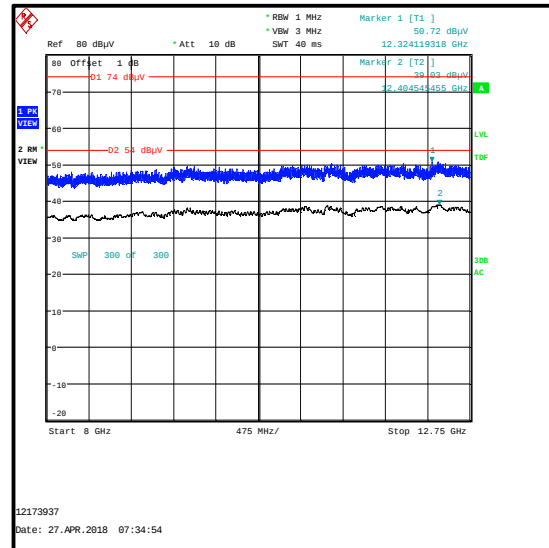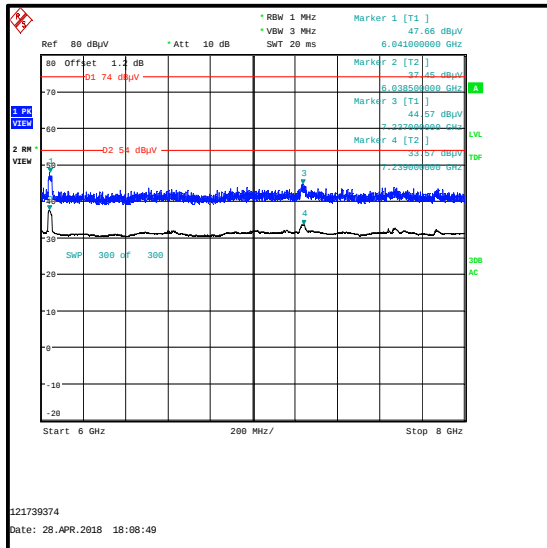Transmitter Out of Band Radiated Emissions - *Bluetooth* LE top channel / 2.4 GHz WLAN (MIMO) bottom channel / 5 GHz WLAN (SISO) bottom channel (continued)

Transmitter Out of Band Radiated Emissions - *Bluetooth* LE top channel / 2.4 GHz WLAN (MIMO) bottom channel / 5 GHz WLAN (SISO) bottom channel (continued)

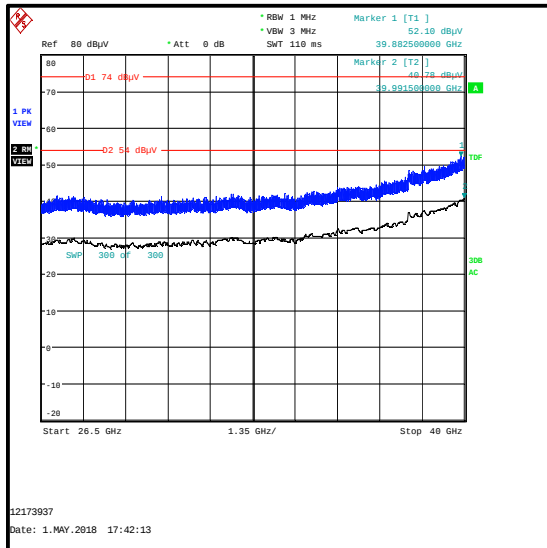

4.18. Transmitter Out of Band Radiated Emissions - Bluetooth LE top channel / 2.4 GHz WLAN (MIMO) bottom channel / 5 GHz WLAN (SISO) top channel

Test Summary:

Test Engineers:	Mohamed Toubella, Marco Zunarelli, Tom Sleigh & Mark Perry	Test Dates:	27 April 2018 to 13 May 2018
Test Sample Serial Number:	C02W6002JTDV, C02VR00RJH93		

FCC Reference:	Parts 15.33, 15.205(a), 15.209(a), 15.247(d) & 15.407(b)
ISED Canada Reference:	RSS-Gen 6.13 & 8.9 / RSS-247 5.5, 6.2.4.2
Test Method Used:	ANSI C63.10 Sections 6.3, 6.5, 6.6, 11.11, 11.12.2.4 & 11.12.2.5.1, KDB 558074 Sections 11, 12.2.4, 12.2.5.1, 12.7, KDB 789033 II.G
Frequency Range:	30 MHz to 40 GHz
Configuration:	Bluetooth LE top channel / 2.4 GHz WLAN (2Tx MIMO) bottom channel / 5 GHz WLAN (SISO) top channel

Environmental Conditions:

Temperature (°C):	20 to 24
Relative Humidity (%):	36 to 50

Note(s):

1. All other intermodulation products were below the noise floor level or greater than 20 dB from the specification limit.
2. The Bluetooth LE and 2.4 GHz WLAN fundamentals are shown on the 1 GHz to 3 GHz plot.
3. The 5 GHz WLAN fundamental is shown on the 4 GHz to 6 GHz plot.
4. Pre-scans were made against the FCC Part 15 general limits for radiated emissions.
5. The test receiver resolution bandwidth was set to 120 kHz and video bandwidth to 500 kHz, for measurements below 1 GHz. For measurements above 1 GHz the resolution bandwidth was set to 1 MHz and video bandwidth to 3 MHz, with the sweep time set to auto. Markers were placed on the highest measured level.
6. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
7. Measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.





Transmitter Out of Band Radiated Emissions - *Bluetooth* LE top channel / 2.4 GHz WLAN (MIMO) bottom channel / 5 GHz WLAN (SISO) top channel (continued)





Results: Peak


Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

Results: Average

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

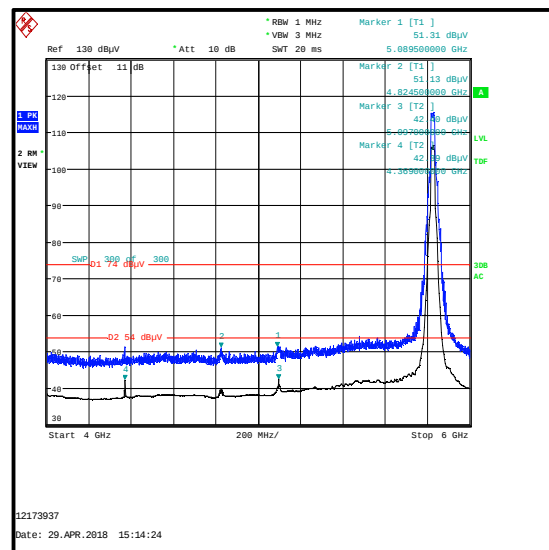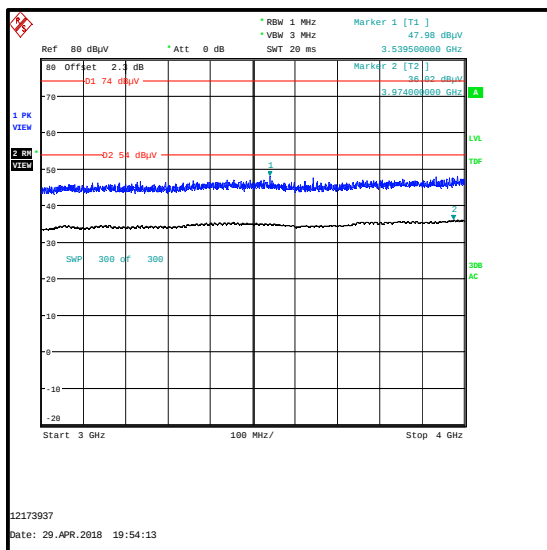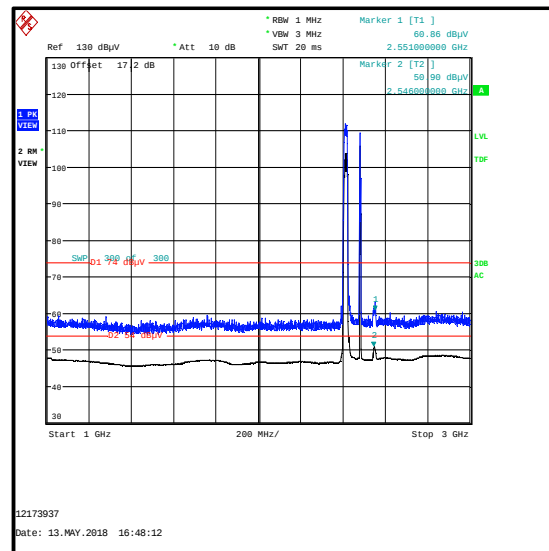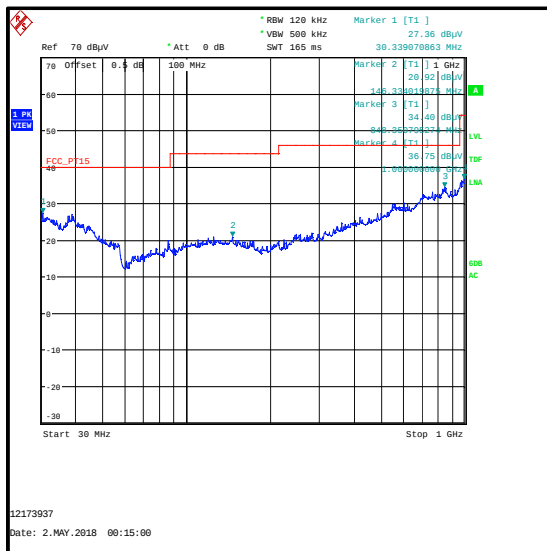

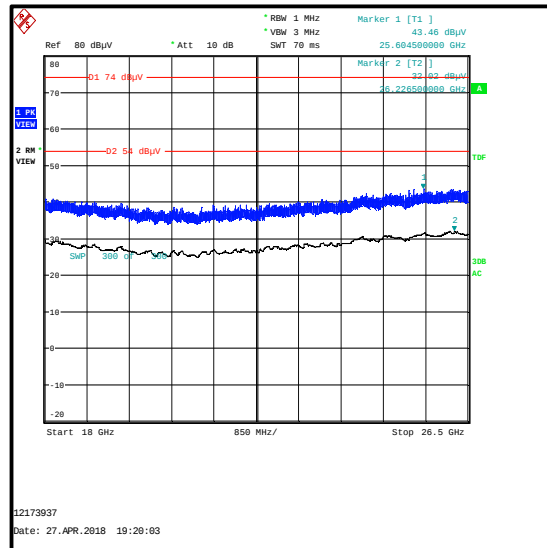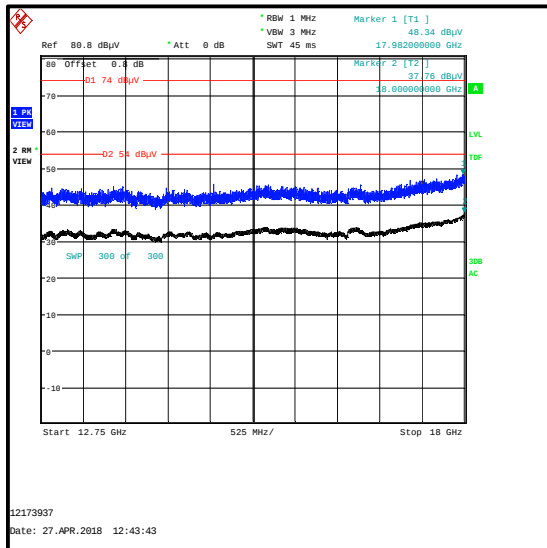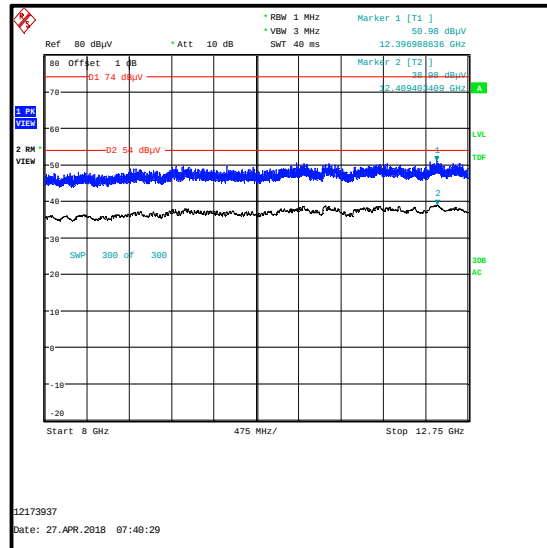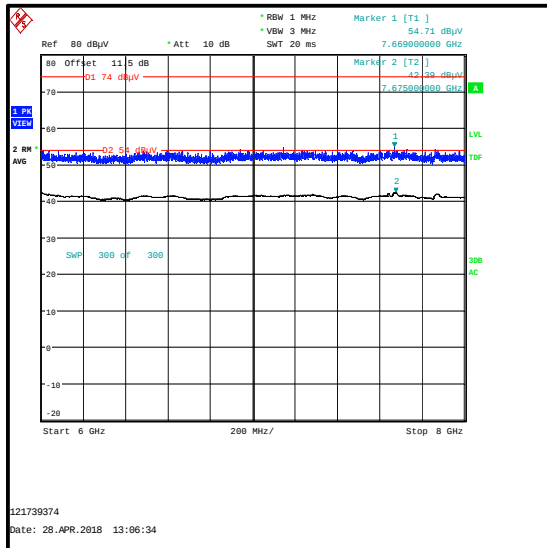Transmitter Out of Band Radiated Emissions - Bluetooth LE top channel / 2.4 GHz WLAN (MIMO) bottom channel / 5 GHz WLAN (SISO) top channel (continued)

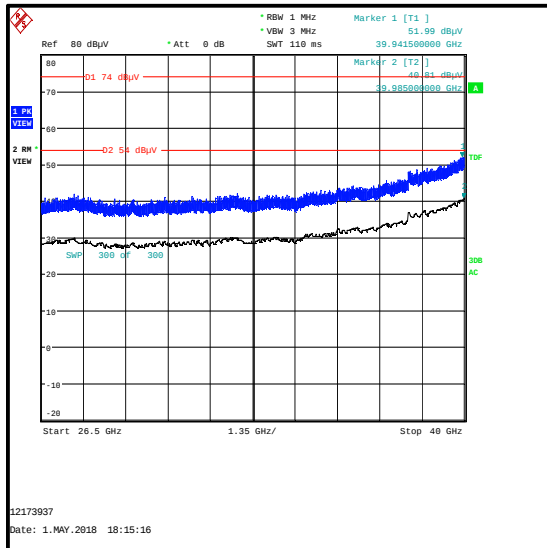Transmitter Out of Band Radiated Emissions - Bluetooth LE top channel / 2.4 GHz WLAN (MIMO) bottom channel / 5 GHz WLAN (SISO) top channel (continued)

4.19. Transmitter Out of Band Radiated Emissions - 2.4 GHz WLAN (SISO) bottom channel / 5 GHz WLAN (MIMO) top channel

Test Summary:

Test Engineers:	Mohamed Toubella, Marco Zunarelli, Tom Sleight & Mark Perry	Test Dates:	24 April 2018 to 02 May 2018
Test Sample Serial Number:	C02W6002JTDV, C02VR00RJH93		

FCC Reference:	Parts 15.33, 15.205(a), 15.209(a), 15.247(d) & 15.407(b)
ISED Canada Reference:	RSS-Gen 6.13 & 8.9 / RSS-247 5.5 & 6.2.4.2
Test Method Used:	ANSI C63.10 Sections 6.3, 6.5, 6.6, 11.11, 11.12.2.4 & 11.12.2.5.1, KDB 558074 Sections 11, 12.2.4 & 12.2.5.1 KDB 789033 II.G
Frequency Range:	30 MHz to 40 GHz
Configuration:	2.4 GHz WLAN (SISO) bottom channel / 5 GHz WLAN (3Tx MIMO) top channel

Environmental Conditions:

Temperature (°C):	21 to 24
Relative Humidity (%):	40 to 50

Note(s):





1. All intermodulation products were below the noise floor level or greater than 20 dB from the specification limit.
2. The 2.4 GHz WLAN fundamental is shown on the 1 GHz to 3 GHz plot.
3. The 5 GHz WLAN fundamental is shown on the 4 GHz to 6 GHz plot.
4. Pre-scans were made against the FCC Part 15 general limits for radiated emissions.
5. The emissions at approximately 5618.000 MHz and 6034.000 MHz are not intermodulation products and were therefore not measured.
6. The emission at approximately 4824.000 MHz is the second harmonic of the 2.4 GHz WLAN signal and was therefore not measured
7. The test receiver resolution bandwidth was set to 120 kHz and video bandwidth to 500 kHz, for measurements below 1 GHz. For measurements above 1 GHz the resolution bandwidth was set to 1 MHz and video bandwidth to 3 MHz, with the sweep time set to auto. Markers were placed on the highest measured level.
8. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
9. Measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.





Transmitter Out of Band Radiated Emissions - 2.4 GHz WLAN (SISO) bottom channel / 5 GHz WLAN (MIMO) top channel (continued)**Results: Peak**


Frequency (MHz)	Antenna Polarity	Peak Level (dBμV/m)	Peak Limit (dBμV/m)	Margin (dB)	Result
See note 1					

Results: Average

Frequency (MHz)	Antenna Polarity	Average Level (dBμV/m)	Average Limit (dBμV/m)	Margin (dB)	Result
See note 1					

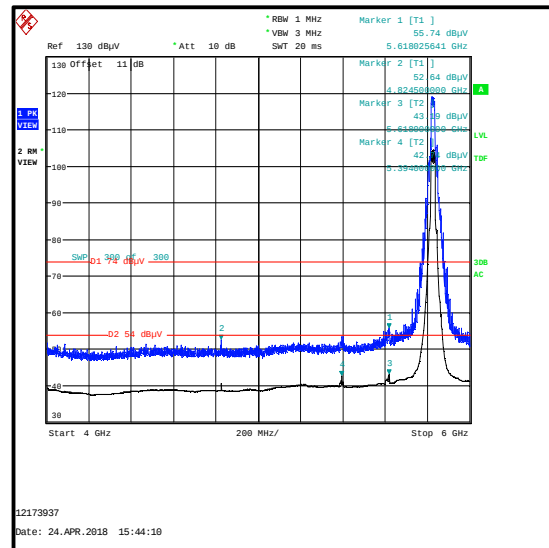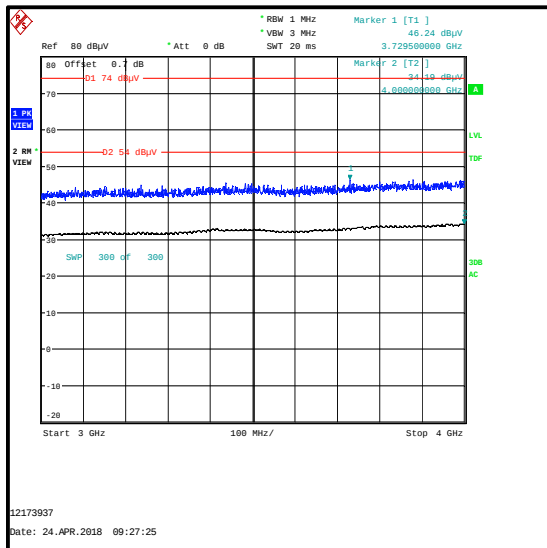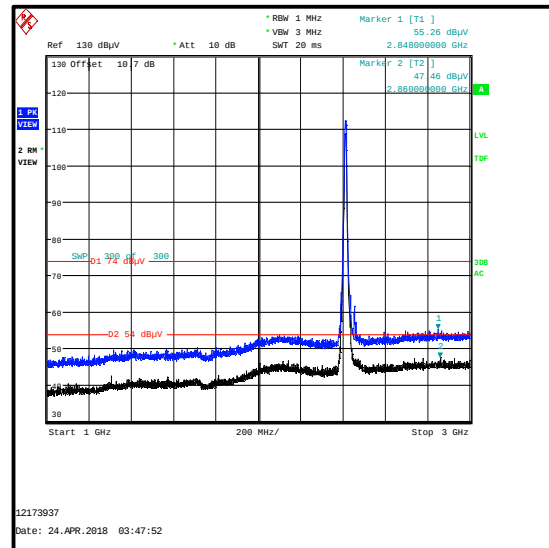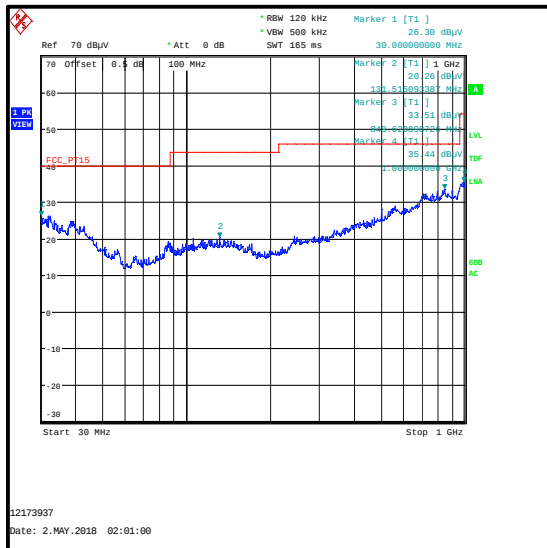

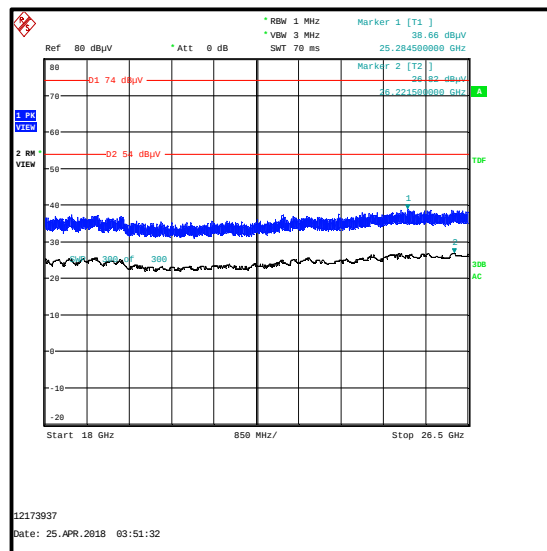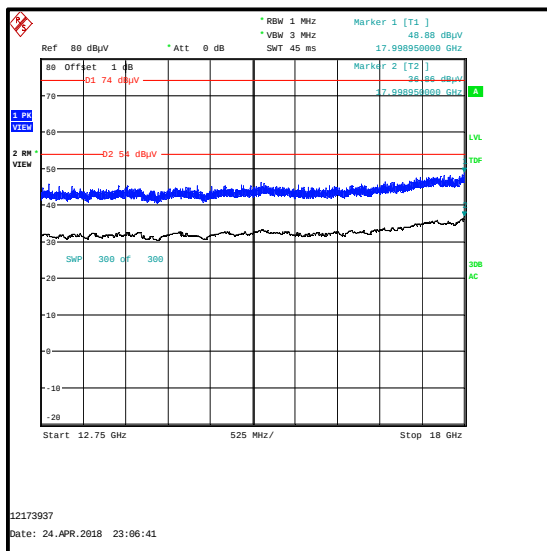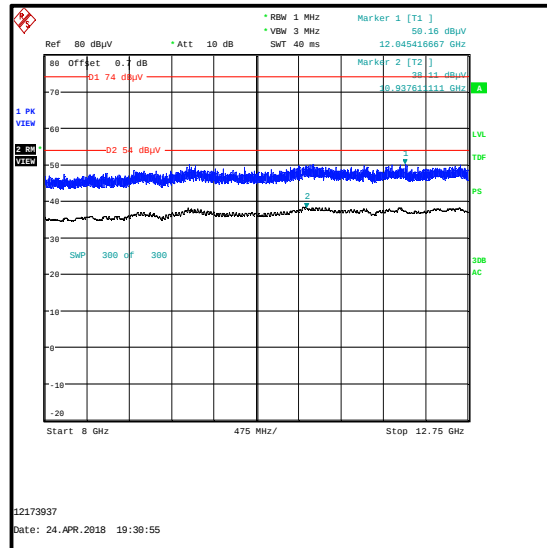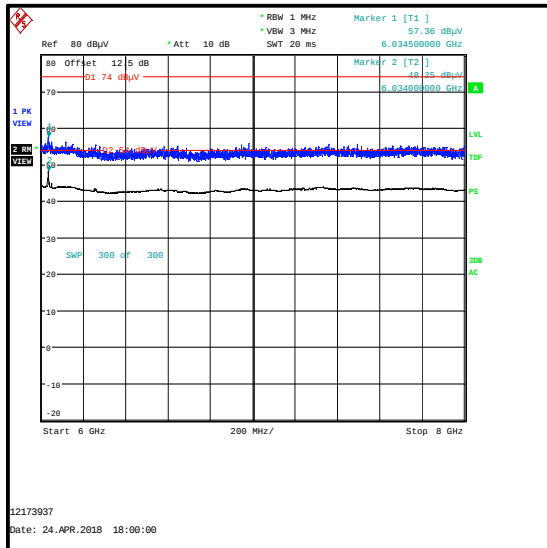Transmitter Out of Band Radiated Emissions - 2.4 GHz WLAN (SISO) bottom channel / 5 GHz WLAN (MIMO) top channel (continued)

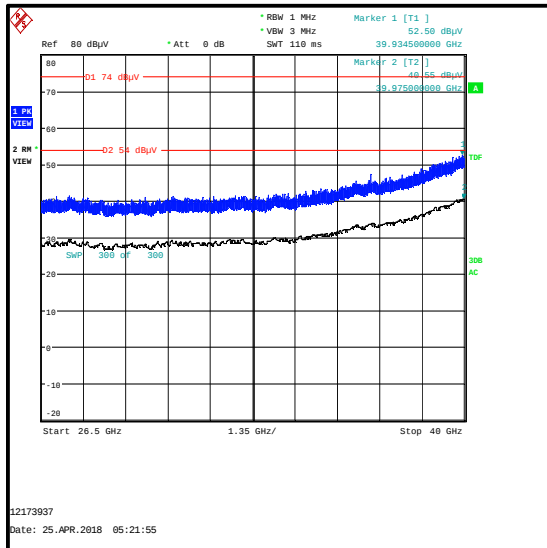Transmitter Out of Band Radiated Emissions - 2.4 GHz WLAN (SISO) bottom channel / 5 GHz WLAN (MIMO) top channel (continued)

4.20. Transmitter Out of Band Radiated Emissions - 2.4 GHz WLAN (SISO) top channel / 5 GHz WLAN (MIMO) top channel

Test Summary:

Test Engineers:	Mohamed Toubella, Marco Zunarelli, Tom Sleight & Mark Perry	Test Dates:	27 April 2018 to 13 May 2018
Test Sample Serial Number:	C02W6002JTDV, C02VR00RJH93		

FCC Reference:	Parts 15.33, 15.205(a), 15.209(a), 15.247(d) & 15.407(b)
ISED Canada Reference:	RSS-Gen 6.13 & 8.9 / RSS-247 5.5 & 6.2.4.2
Test Method Used:	ANSI C63.10 Sections 6.3, 6.5, 6.6, 11.11, 11.12.2.4 & 11.12.2.5.1, KDB 558074 Sections 11, 12.2.4 & 12.2.5.1, KDB 789033 II.G
Frequency Range:	30 MHz to 40 GHz
Configuration:	2.4 GHz WLAN (SISO) top channel / 5 GHz WLAN (3Tx MIMO) top channel

Environmental Conditions:

Temperature (°C):	20 to 24
Relative Humidity (%):	36 to 50

Note(s):





1. All intermodulation products were below the noise floor level or greater than 20 dB from the specification limit.
2. The 2.4 GHz WLAN fundamental is shown on the 1 GHz to 3 GHz plot.
3. The 5 GHz WLAN fundamental is shown on the 4 GHz to 6 GHz plot.
4. Pre-scans were made against the FCC Part 15 general limits for radiated emissions.
5. The emission at approximately 4944.000MHz is the second harmonic of the 2.4GHz WLAN signal and was therefore not measured.
6. The emissions at 5618.500MHz and 5389.500MHz are not intermodulation products and were therefore not measured.
7. The test receiver resolution bandwidth was set to 120 kHz and video bandwidth to 500 kHz, for measurements below 1 GHz. For measurements above 1 GHz the resolution bandwidth was set to 1 MHz and video bandwidth to 3 MHz, with the sweep time set to auto. Markers were placed on the highest measured level.
8. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
9. Measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.





Transmitter Out of Band Radiated Emissions - 2.4 GHz WLAN (SISO) top channel / 5 GHz WLAN (MIMO) top channel (continued)**Results: Peak**


Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

Results: Average

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

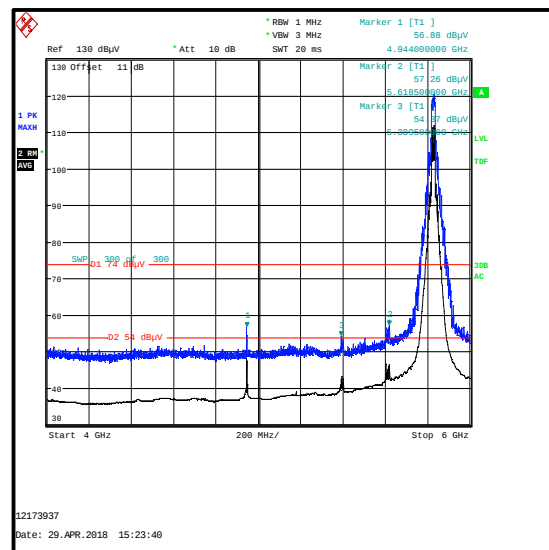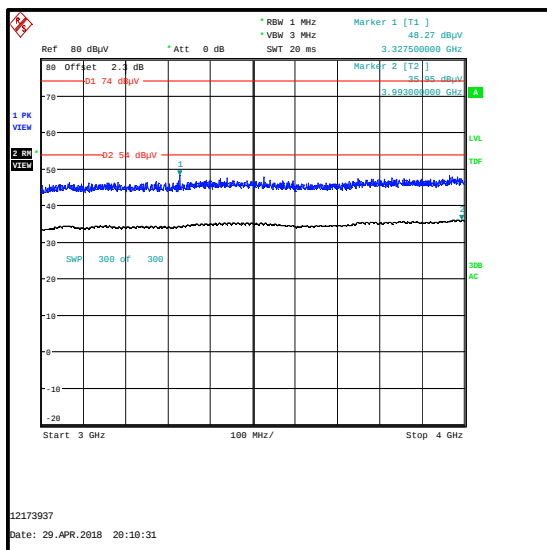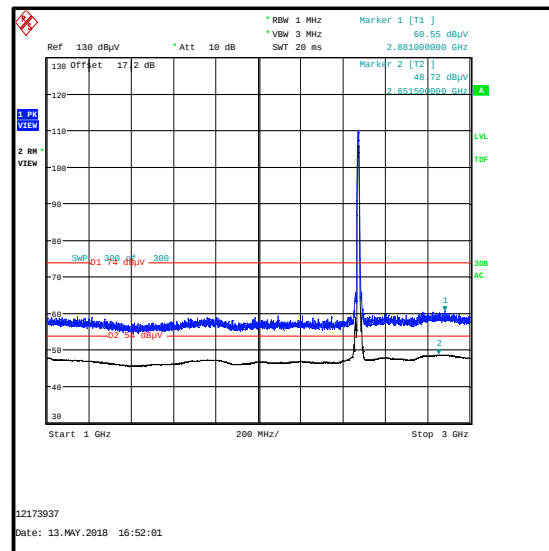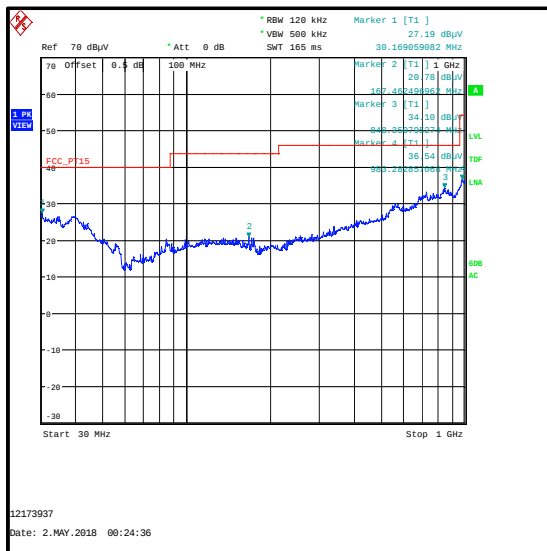

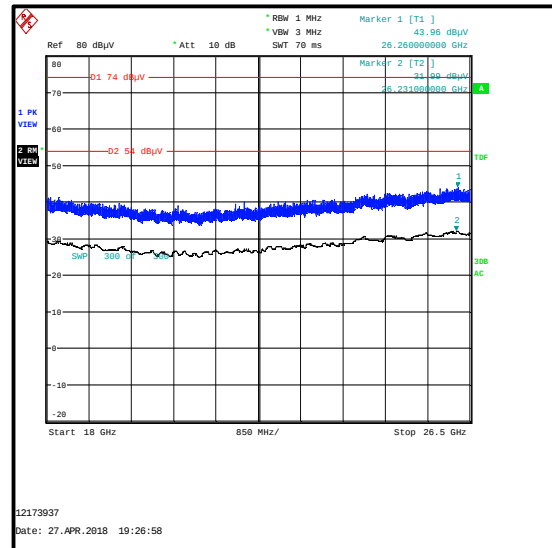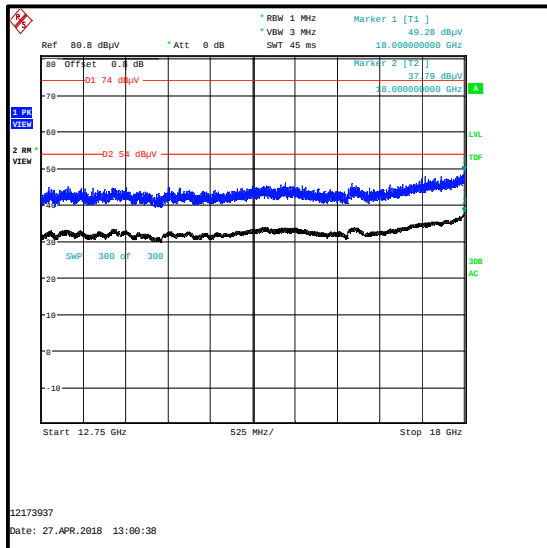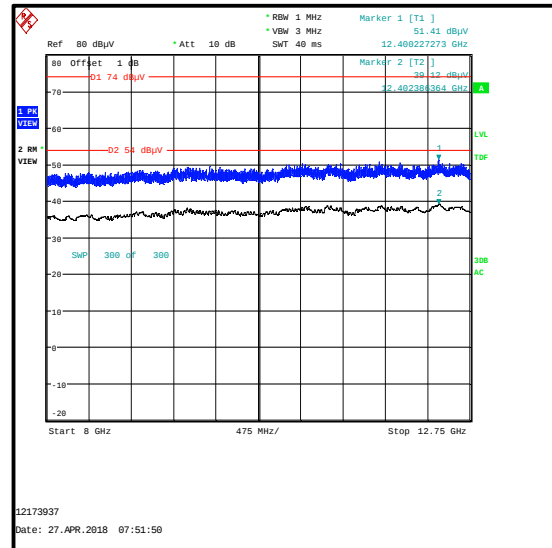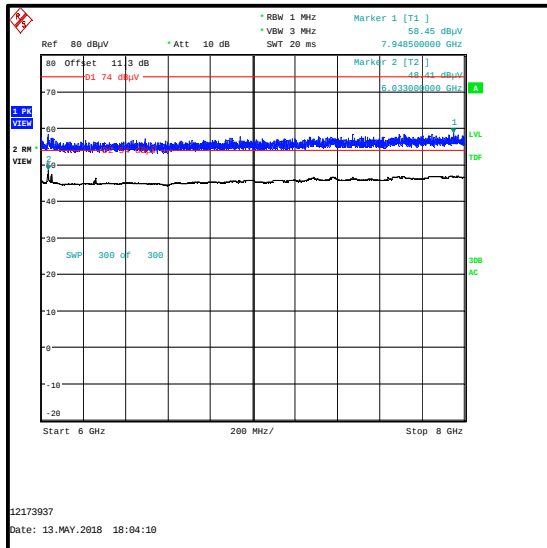Transmitter Out of Band Radiated Emissions - 2.4 GHz WLAN (SISO) top channel / 5 GHz WLAN (MIMO) top channel (continued)

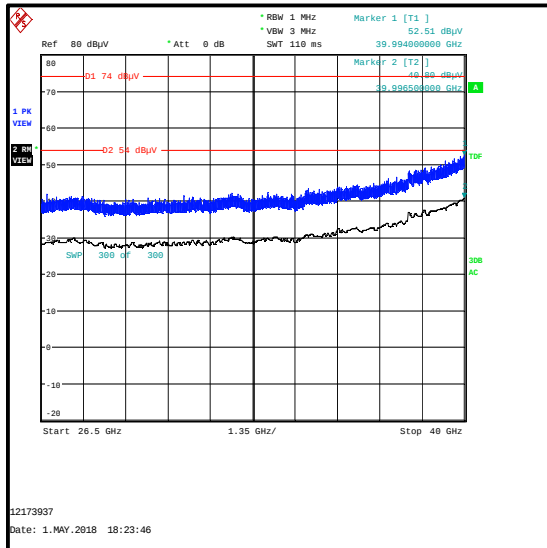Transmitter Out of Band Radiated Emissions - 2.4 GHz WLAN (SISO) top channel / 5 GHz WLAN (MIMO) top channel (continued)

4.21. Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate bottom channel / 2.4 GHz WLAN (SISO) top channel / 5 GHz WLAN (MIMO) bottom channel

Test Summary:

Test Engineers:	Mohamed Toubella, Marco Zunarelli, Tom Sleight & Mark Perry	Test Dates:	24 April 2018 to 12 May 2018
Test Sample Serial Number:	C02W6002JTDV, C02VR00RJH93		

FCC Reference:	Parts 15.33, 15.205(a), 15.209(a), 15.247(d) & 15.407(b)
ISED Canada Reference:	RSS-Gen 6.13 & 8.9 / RSS-247 5.5, 6.2.1.2
Test Method Used:	ANSI C63.10 Sections 6.3, 6.5, 6.6, 11.11, 11.12.2.4 & 11.12.2.5.1, KDB 558074 Sections 11, 12.2.4, 12.2.5.1, 12.7, KDB 789033 II.G
Frequency Range:	30 MHz to 40 GHz
Configuration:	<i>Bluetooth</i> Basic Rate bottom channel / 2.4 GHz WLAN (SISO) top channel / 5 GHz WLAN (3Tx MIMO) bottom channel

Environmental Conditions:

Temperature (°C):	20 to 24
Relative Humidity (%):	36 to 50

Note(s):

1. All intermodulation products were below the noise floor level or greater than 20 dB from the specification limit.
2. The *Bluetooth* and 2.4 GHz WLAN fundamentals are shown on the 1 GHz to 3 GHz plot.
3. The 5 GHz WLAN fundamental is shown on the 4 GHz to 6 GHz plot.
4. Pre-scans were made against the FCC Part 15 general limits for radiated emissions.
5. The emissions at approximately 4944.000 MHz is the second harmonic of the 2.4 GHz WLAN signal and was therefore not measured.
6. The emissions at approximately 1562.000 MHz and 5612.000 MHz are not intermodulation products and were therefore not measured.
7. The test receiver resolution bandwidth was set to 120 kHz and video bandwidth to 500 kHz, for measurements below 1 GHz. For measurements above 1 GHz the resolution bandwidth was set to 1 MHz and video bandwidth to 3 MHz, with the sweep time set to auto. Markers were placed on the highest measured level.
8. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
9. Measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres





Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate bottom channel / 2.4 GHz WLAN (SISO) top channel / 5 GHz WLAN (MIMO) bottom channel (continued)





Results: Peak

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
See note 1					


Results: Average

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

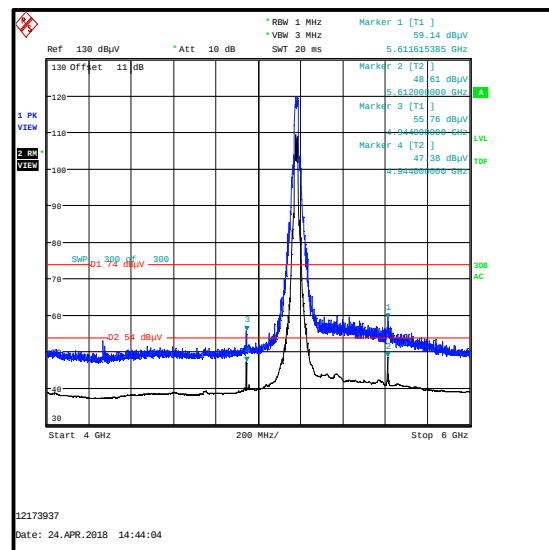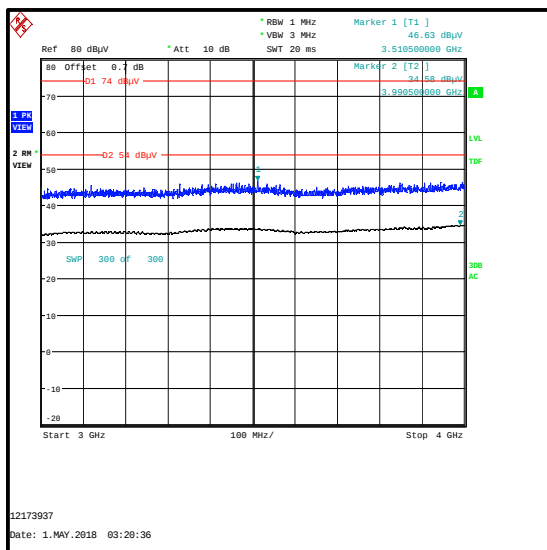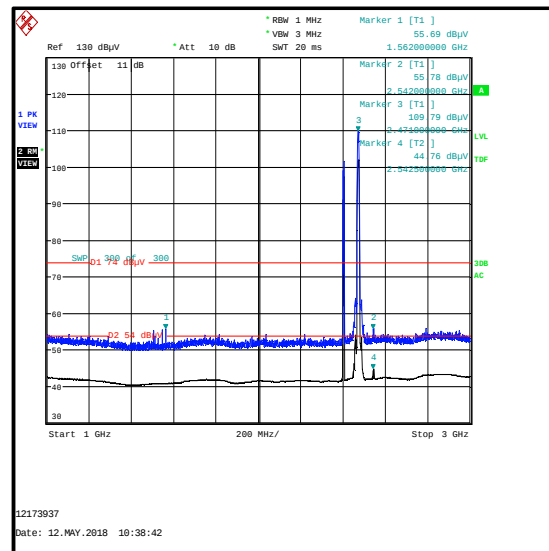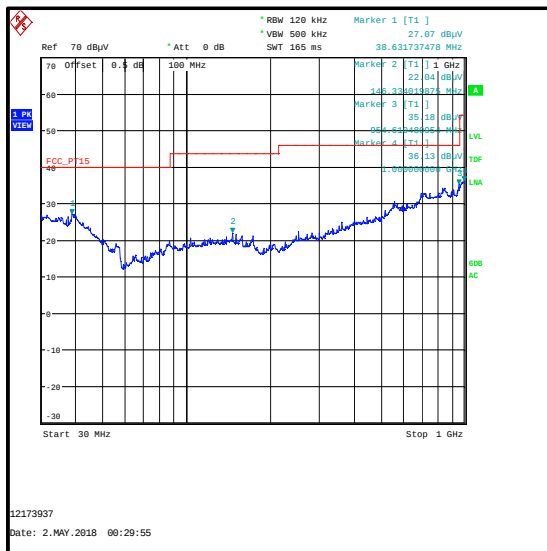

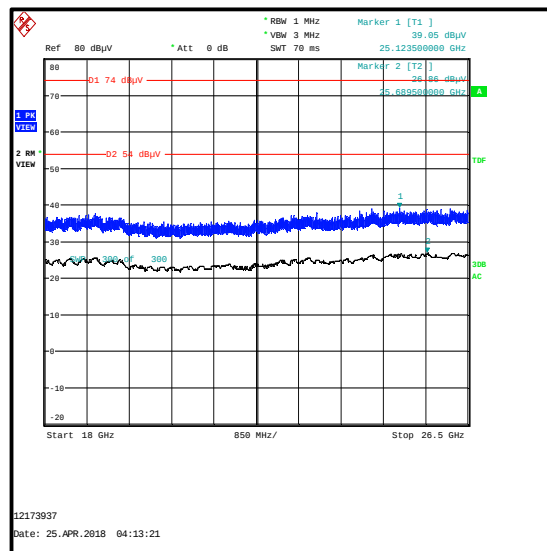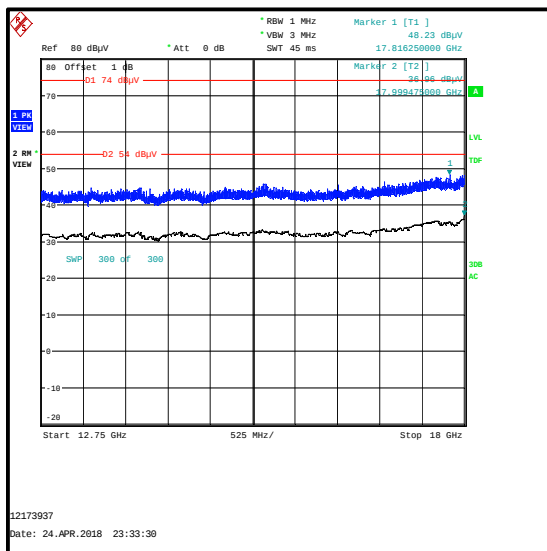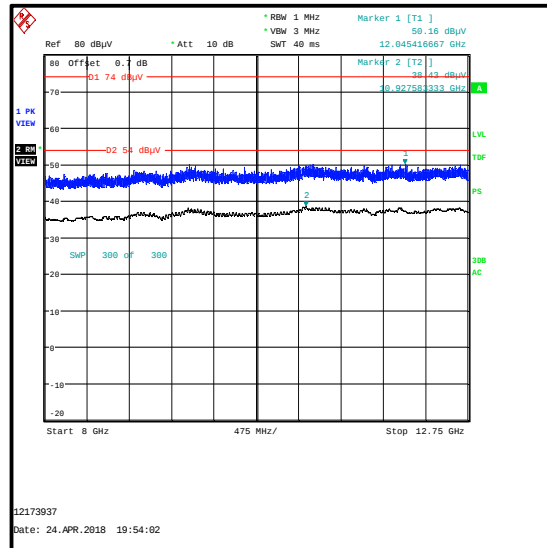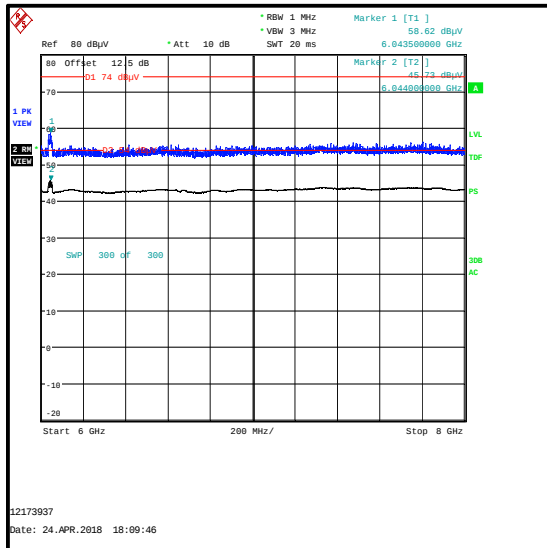Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate bottom channel / 2.4 GHz WLAN (SISO) top channel / 5 GHz WLAN (MIMO) bottom channel (continued)

Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate bottom channel / 2.4 GHz WLAN (SISO) top channel / 5 GHz WLAN (MIMO) bottom channel (continued)

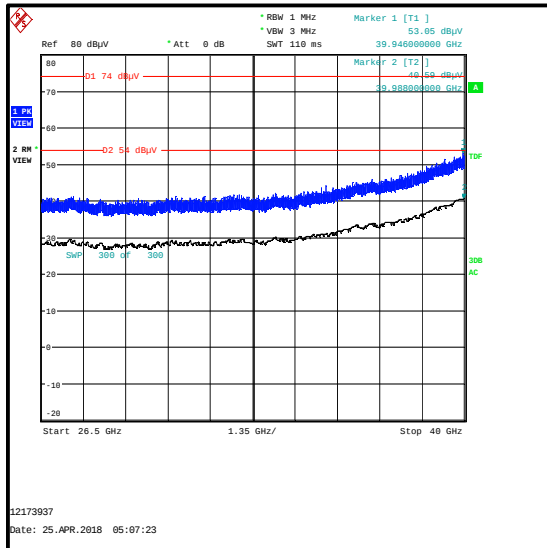

4.22. Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate bottom channel / 2.4 GHz WLAN (SISO) top channel / 5 GHz WLAN (MIMO) top channel

Test Summary:

Test Engineers:	Mohamed Toubella, Marco Zunarelli, Tom Sleight & Mark Perry	Test Dates:	27 April 2018 to 19 May 2018
Test Sample Serial Number:	C02W6002JTDV, C02VR00RJH93		

FCC Reference:	Parts 15.33, 15.205(a), 15.209(a), 15.247(d) & 15.407(b)
ISED Canada Reference:	RSS-Gen 6.13 & 8.9 / RSS-247 5.5, 6.2.4.2
Test Method Used:	ANSI C63.10 Sections 6.3, 6.5, 6.6, 11.11, 11.12.2.4 & 11.12.2.5.1, KDB 558074 Sections 11, 12.2.4, 12.2.5.1, 12.7, KDB 789033 II.G
Frequency Range:	30 MHz to 40 GHz
Configuration:	<i>Bluetooth</i> Basic Rate bottom channel / 2.4 GHz WLAN (SISO) top channel / 5 GHz WLAN (3Tx MIMO) top channel

Environmental Conditions:

Temperature (°C):	20 to 24
Relative Humidity (%):	36 to 50

Note(s):

- All other intermodulation products were below the noise floor level or greater than 20 dB from the specification limit.
- The *Bluetooth* and 2.4 GHz WLAN fundamentals are shown on the 1 GHz to 3 GHz plot.
- The 5 GHz WLAN fundamental is shown on the 4 GHz to 6 GHz plot.
- Pre-scans were made against the FCC Part 15 general limits for radiated emissions.
- The emission at approximately 4944.000MHz is the second harmonic of the 2.4GHz WLAN signal and was therefore not measured.
- The emission at approximately 5616.000 MHz is not an intermodulation product and was therefore not measured.
- The test receiver resolution bandwidth was set to 120 kHz and video bandwidth to 500 kHz, for measurements below 1 GHz. For measurements above 1 GHz the resolution bandwidth was set to 1 MHz and video bandwidth to 3 MHz, with the sweep time set to auto. Markers were placed on the highest measured level.
- Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
- Measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.





Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate bottom channel / 2.4 GHz WLAN (SISO) top channel / 5 GHz WLAN (MIMO) top channel (continued)





Results: Peak

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
5394.337	Vertical	61.6	74.0	12.4	Complied
6049.625	Vertical	59.5	68.2	8.7	Complied


Results: Average

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
5393.912	Vertical	49.4	54.0	4.6	Complied

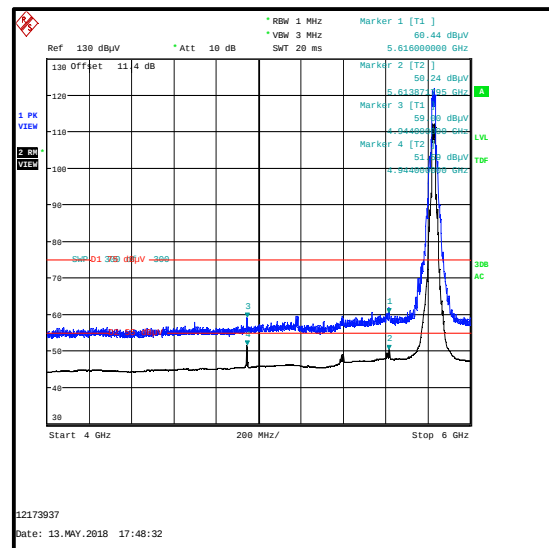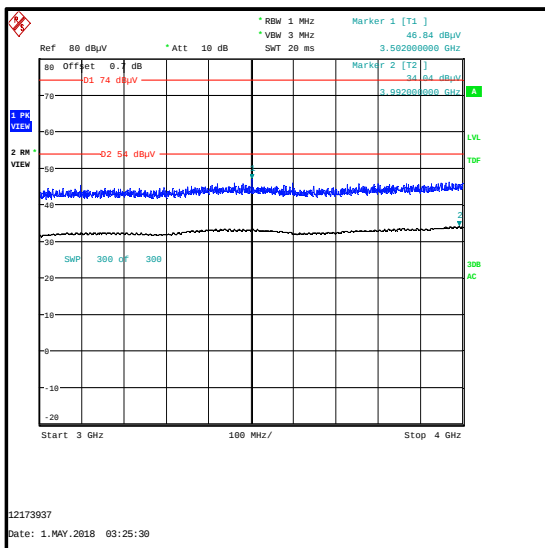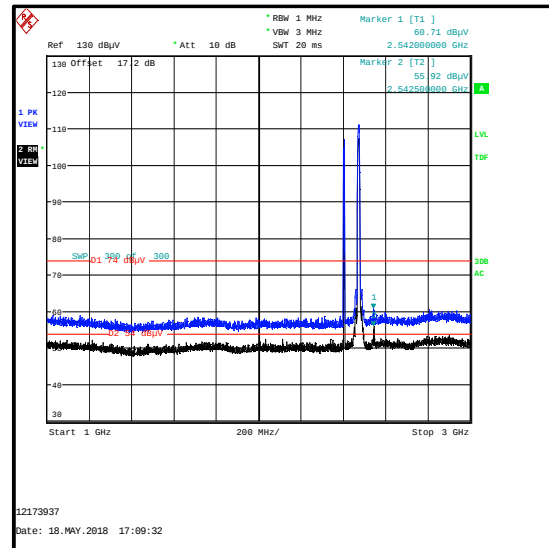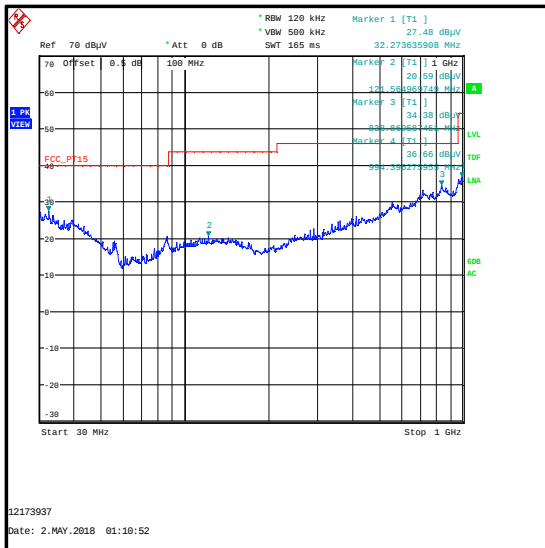

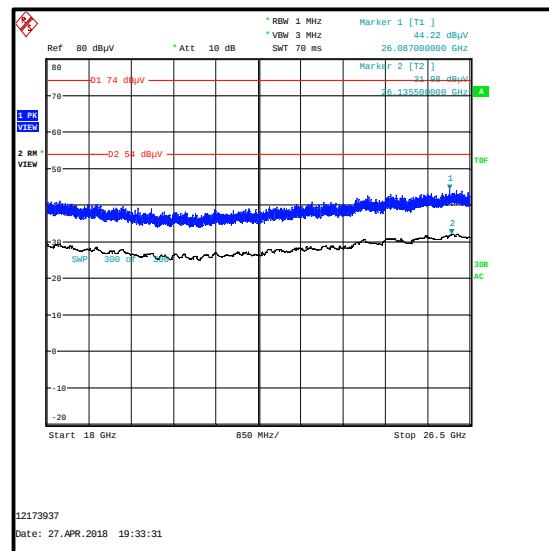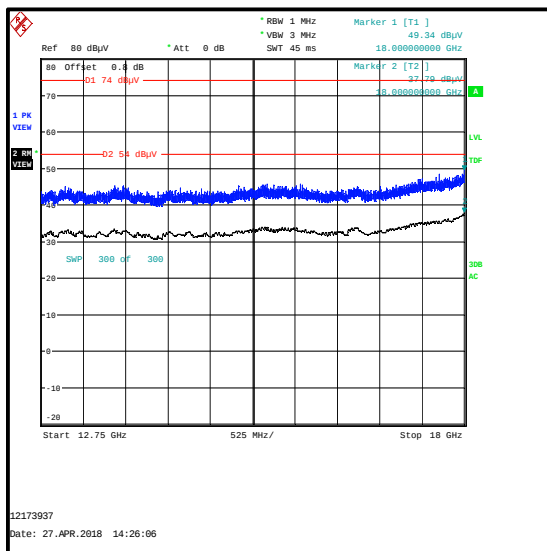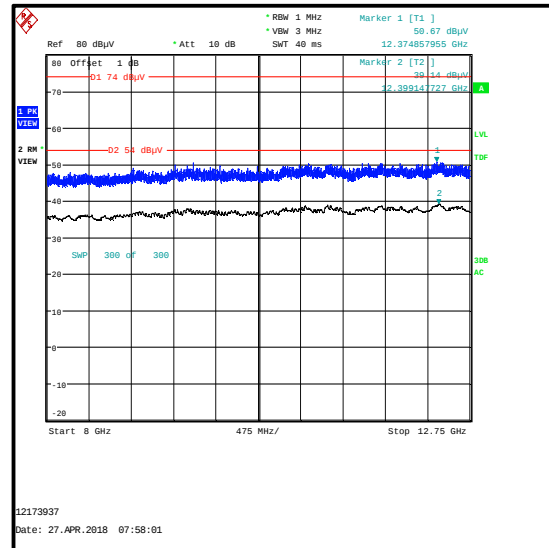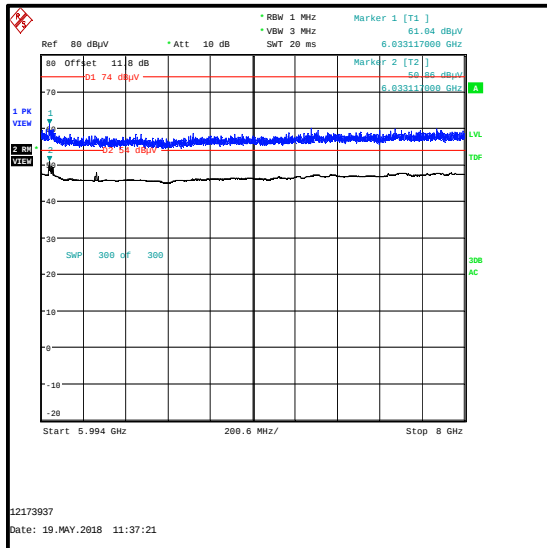Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate bottom channel / 2.4 GHz WLAN (SISO) top channel / 5 GHz WLAN (MIMO) top channel (continued)

**Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate bottom channel / 2.4 GHz
WLAN (SISO) top channel / 5 GHz WLAN (MIMO) top channel (continued)**

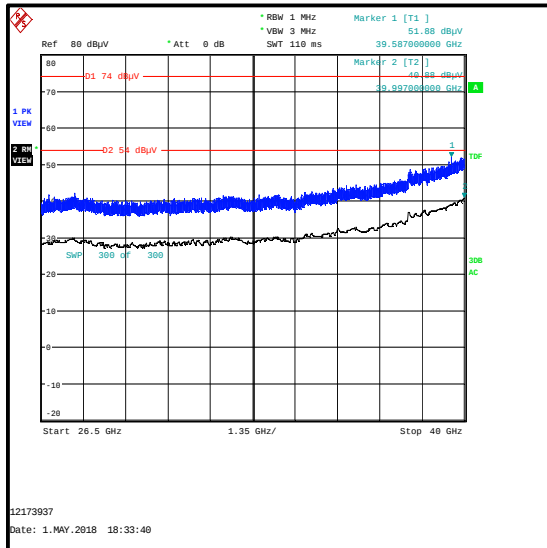

4.23. Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate top channel / 2.4 GHz WLAN (SISO) bottom channel / 5 GHz WLAN (MIMO) bottom channel

Test Summary:

Test Engineers:	Mohamed Toubella, Marco Zunarelli, Tom Sleigh & Mark Perry	Test Dates:	27 April 2018 to 19 May 2018
Test Sample Serial Number:	C02W6002JTDV, C02VR00RJH93		

FCC Reference:	Parts 15.33, 15.205(a), 15.209(a), 15.247(d) & 15.407(b)
ISED Canada Reference:	RSS-Gen 6.13 & 8.9 / RSS-247 5.5, 6.2.1.2
Test Method Used:	ANSI C63.10 Sections 6.3, 6.5, 6.6, 11.11, 11.12.2.4 & 11.12.2.5.1, KDB 558074 Sections 11, 12.2.4, 12.2.5.1, 12.7, KDB 789033 II.G
Frequency Range:	30 MHz to 40 GHz
Configuration:	<i>Bluetooth</i> Basic Rate top channel / 2.4 GHz WLAN (SISO) bottom channel / 5 GHz WLAN (3Tx MIMO) bottom channel

Environmental Conditions:

Temperature (°C):	23 to 24
Relative Humidity (%):	41 to 47

Note(s):





1. All other intermodulation products were below the noise floor level or greater than 20 dB from the specification limit.
2. The *Bluetooth* and 2.4 GHz WLAN fundamentals are shown on the 1 GHz to 3 GHz plot.
3. The 5 GHz WLAN fundamental is shown on the 4 GHz to 6 GHz plot.
4. Pre-scans were made against the FCC Part 15 general limits for radiated emissions.
5. The emission at approximately 5612.000MHz is not an intermodulation product and was therefore not measured.
6. The test receiver resolution bandwidth was set to 120 kHz and video bandwidth to 500 kHz, for measurements below 1 GHz. For measurements above 1 GHz the resolution bandwidth was set to 1 MHz and video bandwidth to 3 MHz, with the sweep time set to auto. Markers were placed on the highest measured level.
7. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
8. Measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.





**Transmitter Out of Band Radiated Emissions - Bluetooth Basic Rate top channel / 2.4 GHz
WLAN (SISO) bottom channel / 5 GHz WLAN (MIMO) bottom channel (continued)****Results: Peak**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
6046.500	Vertical	60.1	68.2	8.1	Complied


Results: Average

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

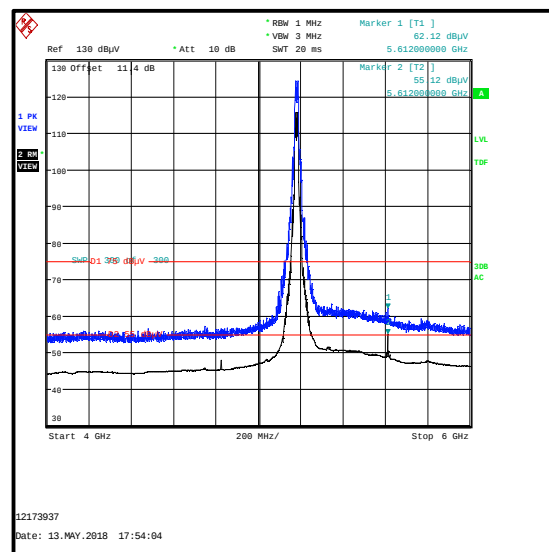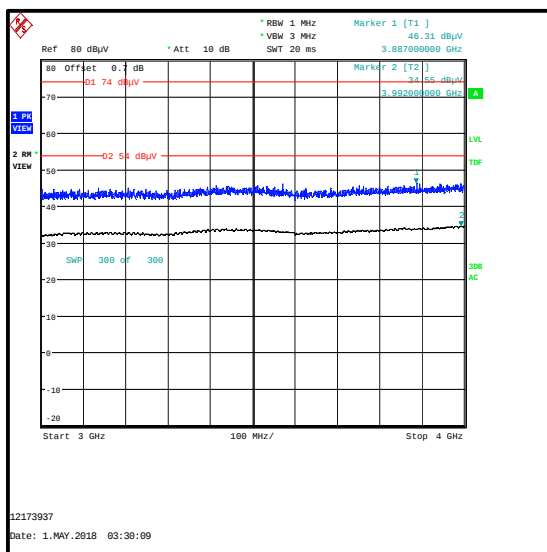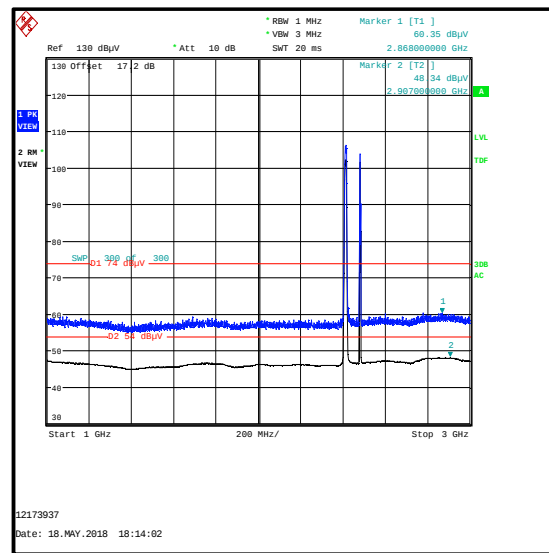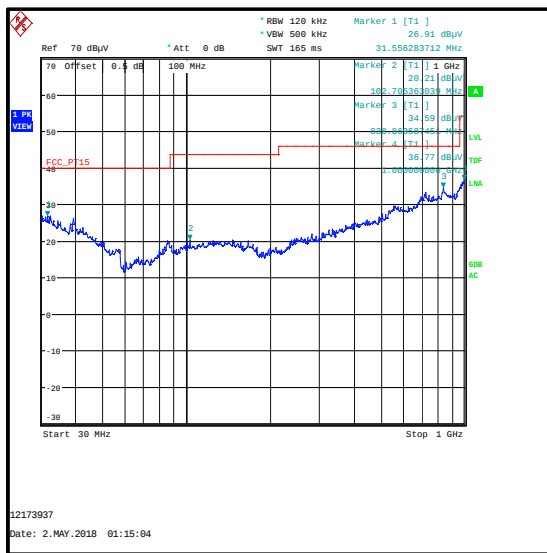

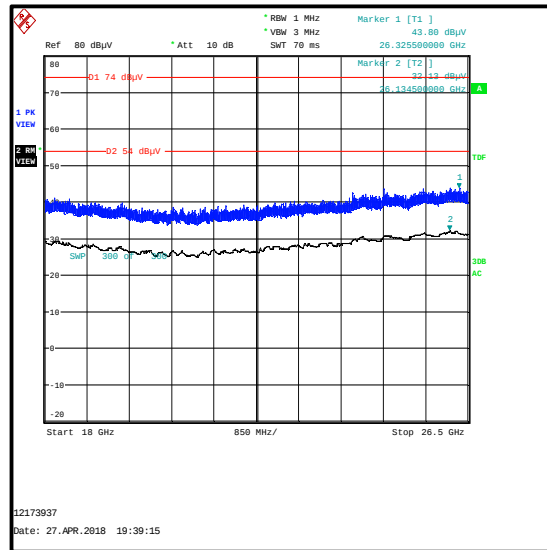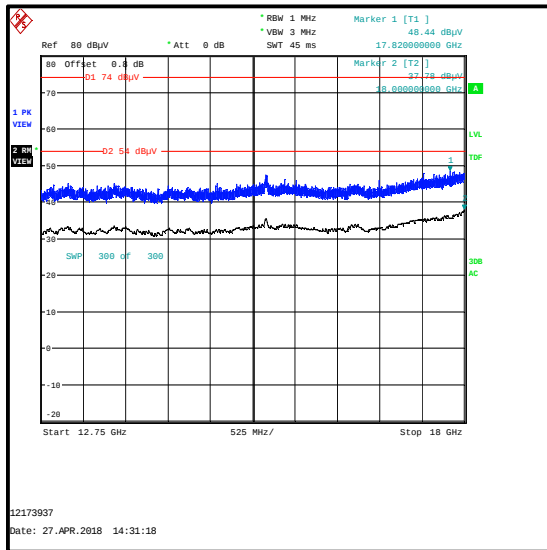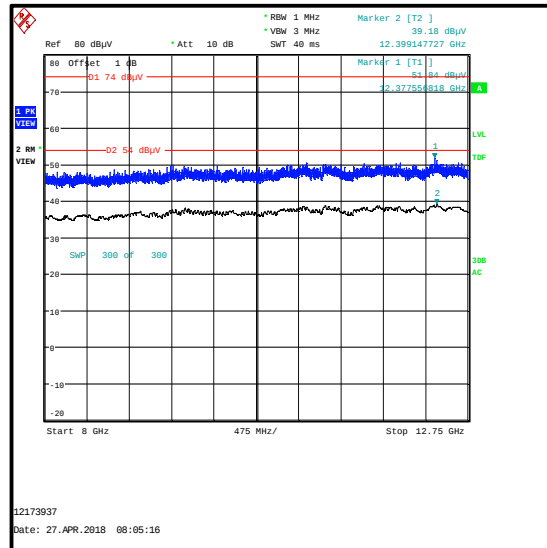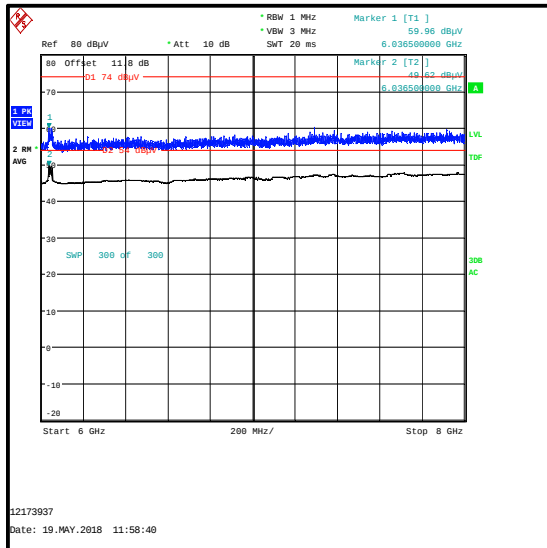**Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate top channel / 2.4 GHz
WLAN (SISO) bottom channel / 5 GHz WLAN (MIMO) bottom channel (continued)**

**Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate top channel / 2.4 GHz
WLAN (SISO) bottom channel / 5 GHz WLAN (MIMO) bottom channel (continued)**

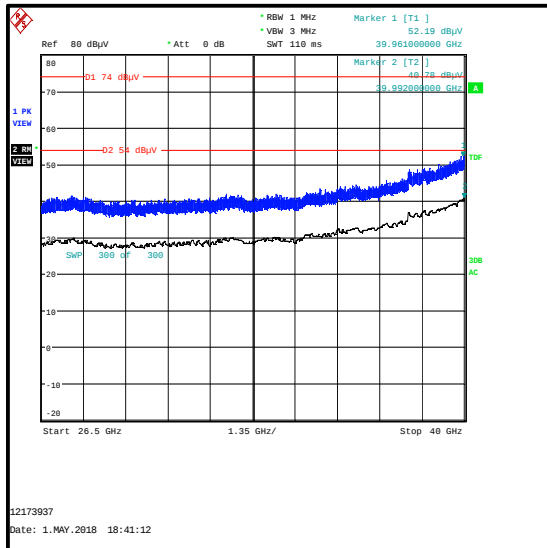

4.24. Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate top channel / 2.4 GHz WLAN (SISO) bottom channel / 5 GHz WLAN (MIMO) top channel

Test Summary:

Test Engineers:	Mohamed Toubella, Marco Zunarelli, Tom Sleigh & Mark Perry	Test Dates:	24 April 2018 to 19 May 2018
Test Sample Serial Number:	C02W6002JTDV, C02VR00RJH93		

FCC Reference:	Parts 15.33, 15.205(a), 15.209(a), 15.247(d) & 15.407(b)
ISED Canada Reference:	RSS-Gen 6.13 & 8.9 / RSS-247 5.5, 6.2.4.2
Test Method Used:	ANSI C63.10 Sections 6.3, 6.5, 6.6, 11.11, 11.12.2.4 & 11.12.2.5.1, KDB 558074 Sections 11, 12.2.4, 12.2.5.1, 12.7, KDB 789033 II.G
Frequency Range:	30 MHz to 40 GHz
Configuration:	<i>Bluetooth</i> Basic Rate top channel / 2.4 GHz WLAN (SISO) bottom channel / 5 GHz WLAN (MIMO) top channel

Environmental Conditions:

Temperature (°C):	20 to 24
Relative Humidity (%):	36 to 50

Note(s):

1. All other intermodulation products were below the noise floor level or greater than 20 dB from the specification limit.
2. The *Bluetooth* and 2.4 GHz WLAN fundamentals are shown on the 1 GHz to 3 GHz plot.
3. The 5 GHz WLAN fundamental is shown on the 4 GHz to 6 GHz plot.
4. Pre-scans were made against the FCC Part 15 general limits for radiated emissions.
5. The emission at approximately 4824.000MHz is the second harmonic of the 2.4GHz WLAN signal and was therefore not measured.
6. The emission at approximately 5618.000MHz is not an intermodulation product and was therefore not measured.
7. The test receiver resolution bandwidth was set to 120 kHz and video bandwidth to 500 kHz, for measurements below 1 GHz. For measurements above 1 GHz the resolution bandwidth was set to 1 MHz and video bandwidth to 3 MHz, with the sweep time set to auto. Markers were placed on the highest measured level.
8. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
9. Measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.to 4 metres.to 4 metres.





Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate top channel / 2.4 GHz WLAN (SISO) bottom channel / 5 GHz WLAN (MIMO) top channel (continued)





Results: Peak

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
6034.400	Vertical	62.0	68.2	6.2	Complied


Results: Average

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

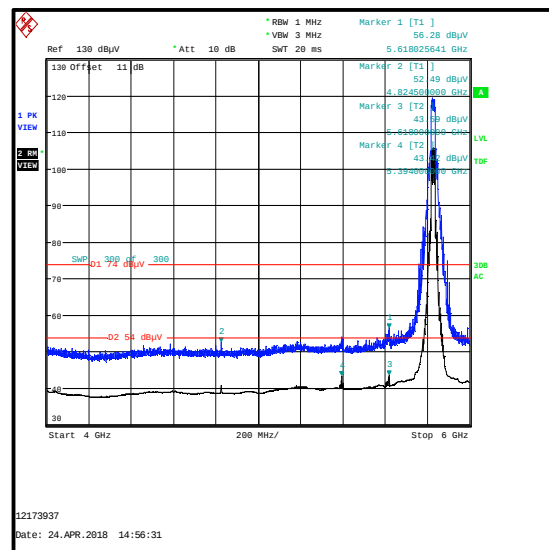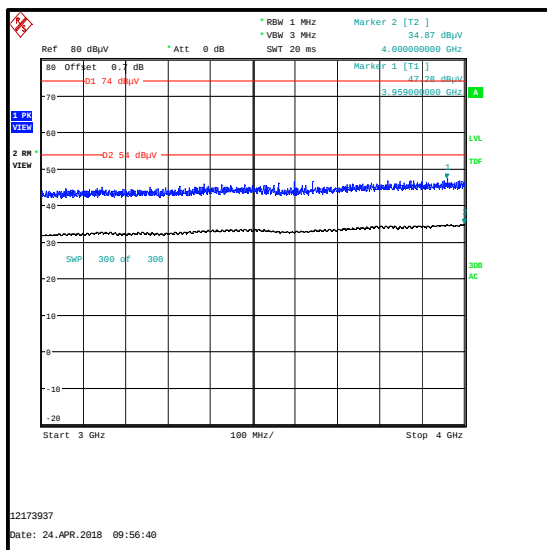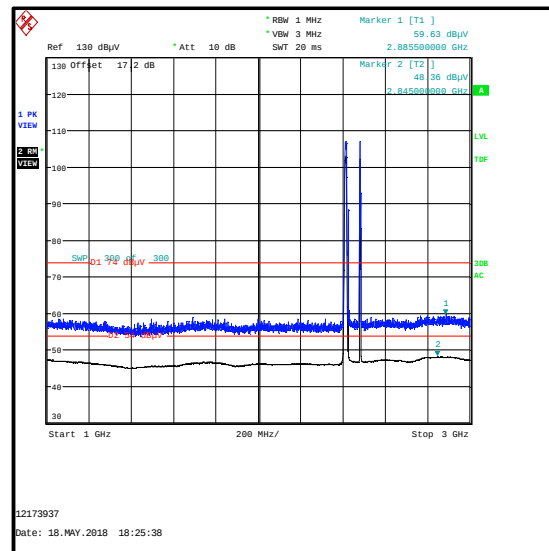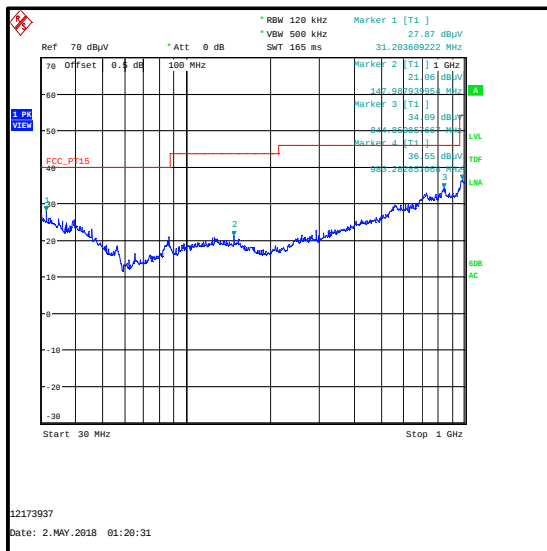

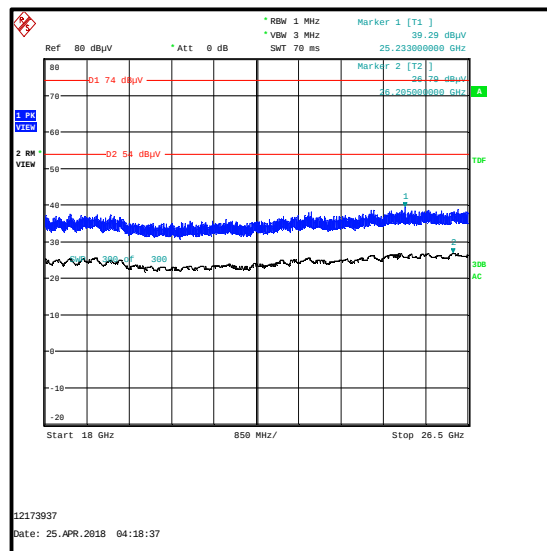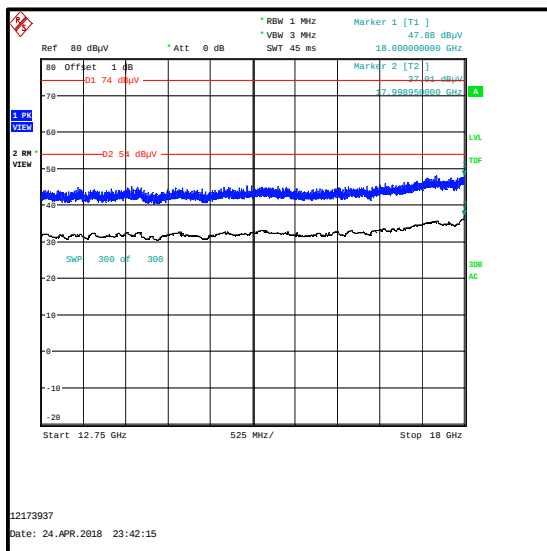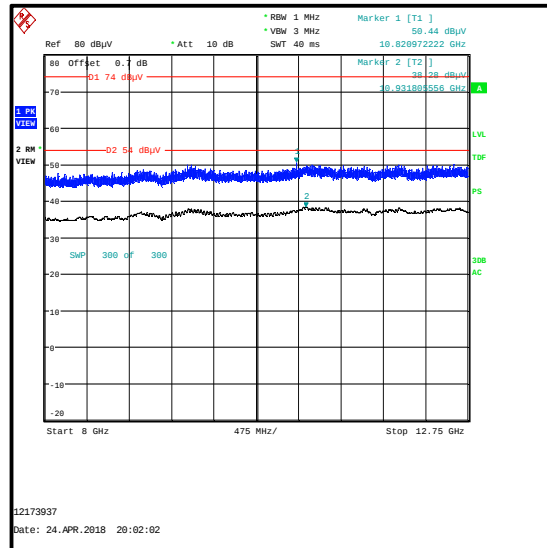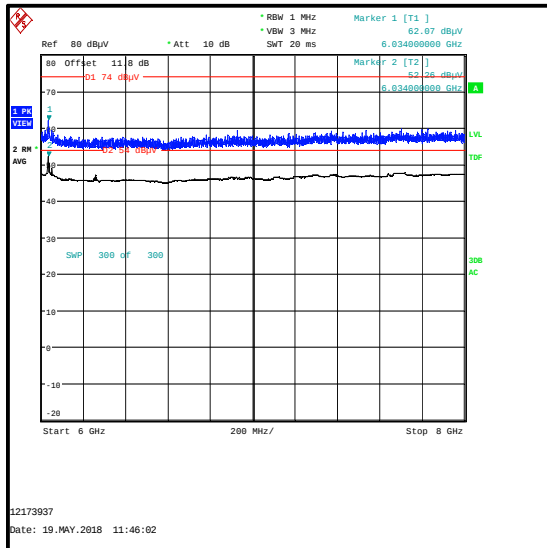**Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate top channel / 2.4 GHz
WLAN (SISO) bottom channel / 5 GHz WLAN (MIMO) top channel (continued)**

**Transmitter Out of Band Radiated Emissions - *Bluetooth* Basic Rate top channel / 2.4 GHz
WLAN (SISO) bottom channel / 5 GHz WLAN (MIMO) top channel (continued)**

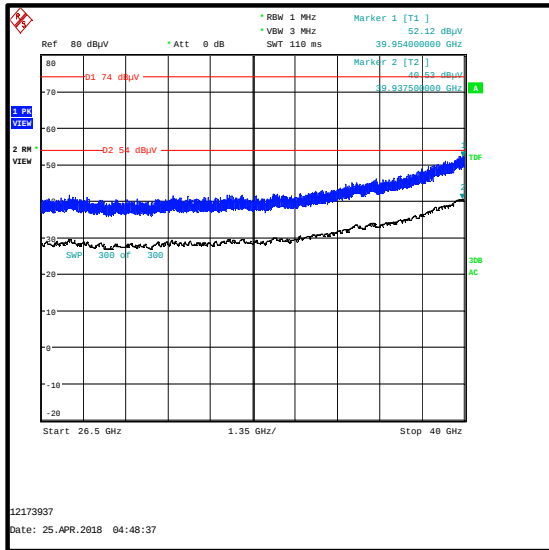

4.25. Transmitter Out of Band Radiated Emissions - Bluetooth LE bottom channel / 2.4 GHz WLAN (SISO) top channel / 5 GHz WLAN (MIMO) bottom channel

Test Summary:

Test Engineers:	Mohamed Toubella, Marco Zunarelli, Tom Sleigh & Mark Perry	Test Dates:	27 April 2018 to 19 May 2018
Test Sample Serial Number:	C02W6002JTDV, C02VR00RJH93		

FCC Reference:	Parts 15.33, 15.205(a), 15.209(a), 15.247(d) & 15.407(b)
ISED Canada Reference:	RSS-Gen 6.13 & 8.9 / RSS-247 5.5, 6.2.1.2
Test Method Used:	ANSI C63.10 Sections 6.3, 6.5, 6.6, 11.11, 11.12.2.4 & 11.12.2.5.1, KDB 558074 Sections 11, 12.2.4, 12.2.5.1, 12.7 KDB 789033 II.G
Frequency Range:	30 MHz to 40 GHz
Configuration:	Bluetooth LE bottom channel / 2.4 GHz WLAN (SISO) top channel / 5 GHz WLAN (3Tx MIMO) bottom channel

Environmental Conditions:

Temperature (°C):	23 to 24
Relative Humidity (%):	41 to 47

Note(s):

- All other intermodulation products were below the noise floor level or greater than 20 dB from the specification limit.
- The Bluetooth LE and 2.4 GHz WLAN fundamentals are shown on the 1 GHz to 3 GHz plot.
- The 5 GHz WLAN fundamental is shown on the 4 GHz to 6 GHz plot.
- Pre-scans were made against the FCC Part 15 general limits for radiated emissions.
- The emission at approximately 4944.000 MHz is the second harmonic of the 2.4GHz WLAN signal and was therefore not measured.
- The emissions at approximately 5612.000 MHz, 5436.000 MHz and 6043.000 MHz are not intermodulation products and were therefore not measured.
- The test receiver resolution bandwidth was set to 120 kHz and video bandwidth to 500 kHz, for measurements below 1 GHz. For measurements above 1 GHz the resolution bandwidth was set to 1 MHz and video bandwidth to 3 MHz, with the sweep time set to auto. Markers were placed on the highest measured level.
- Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
- Measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

Transmitter Out of Band Radiated Emissions - Bluetooth LE bottom channel / 2.4 GHz WLAN (SISO) top channel / 5 GHz WLAN (MIMO) bottom channel (continued)**Results: Peak**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
6041.475	Vertical	59.9	68.2	8.3	Complied

Results: Average

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
See note 1					

