



TEST REPORT

Test Report No. : UL-RPT-RP12718494JD08A V2.0

Customer : Apple Inc.

Model No. : A1991

FCC ID : BCGA1991

Technology : *Bluetooth – Basic Rate & EDR*

Test Standard(s) : FCC Parts 15.209(a) & 15.247

Test Laboratory : UL VS LTD, Basingstoke, Hampshire, RG24 8AH, United Kingdom

1. This test report shall not be reproduced except in full, without the written approval of UL VS LTD.
2. The results in this report apply only to the sample(s) tested.
3. The sample tested is in compliance with the above standard(s).
4. The test results in this report are traceable to the national or international standards.
5. Version 2.0 supersedes all previous versions.

Date of Issue: 17 September 2019

Checked by:

Ben Mercer
Senior Test Engineer, Radio Laboratory

Company Signatory:

Sarah Williams
Senior Test Engineer, Radio Laboratory
UL VS LTD



The *Bluetooth*® word mark and logos are owned by the *Bluetooth* SIG, Inc. and any use of such marks by UL VS LTD is under licence. Other trademarks and trade names are those of their respective owners.

UL VS LTD

Unit 1-3 Horizon, Kingsland Business Park, Wade Road, Basingstoke, Hampshire, RG24 8AH, UK
Telephone: +44 (0)1256 312000
Facsimile: +44 (0)1256 312001

Customer Information

Company Name:	Apple Inc.
Address:	One Apple Park Way Cupertino, California 95014 U.S.A.
Contact Name:	Stuart Thomas

Report Revision History

Version Number	Issue Date	Revision Details	Revised By
1.0	15/07/2019	Initial Version	Ben Mercer
2.0	17/09/2019	Address TCB questions	Sarah Williams

Table of Contents

Customer Information.....	2
Report Revision History	2
1. Attestation of Test Results.....	4
1.1. Description of EUT	4
1.2. General Information	4
1.3. Summary of Test Results	4
1.4. Deviations from the Test Specification	4
2. Summary of Testing.....	5
2.1. Facilities and Accreditation	5
2.2. Methods and Procedures	5
2.3. Calibration and Uncertainty	6
2.4. Test and Measurement Equipment	7
3. Equipment Under Test (EUT)	9
3.1. Identification of Equipment Under Test (EUT)	9
3.2. Modifications Incorporated in the EUT	9
3.3. Additional Information Related to Testing	10
3.4. Description of Available Antennas	10
3.5. Description of Test Setup	11
4. Antenna Port Test Results	16
4.1. Transmitter 20 dB Bandwidth	16
4.2. Transmitter Carrier Frequency Separation	20
4.3. Transmitter Number of Hopping Frequencies and Average Time of Occupancy	24
4.4. Transmitter Maximum Peak Output Power	26
5. Radiated Test Results.....	33
5.1. Transmitter Radiated Emissions <1 GHz	33
5.2. Transmitter Radiated Emissions >1 GHz	35
5.3. Transmitter Band Edge Radiated Emissions	39

1. Attestation of Test Results

1.1. Description of EUT

The Equipment Under Test (EUT) was a Desktop computer with *Bluetooth*, *Bluetooth* Low Energy and 802.11 a/b/g/n/ac capabilities in the 2.4 GHz and 5.0 GHz bands.

1.2. General Information

Specification Reference:	47CFR15.247
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) - Section 15.247
Specification Reference:	47CFR15.209
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) - Section 15.209
Site Registration:	621311
Location of Testing:	UL VS LTD, Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, United Kingdom
Test Dates:	09 May 2019 to 26 May 2019

1.3. Summary of Test Results

FCC Reference (47CFR)	Measurement	Result
Part 15.247(a)(1)	Transmitter 20 dB Bandwidth	Complied
Part 15.247(a)(1)	Transmitter Carrier Frequency Separation	Complied
Part 15.247(a)(1)(iii)	Transmitter Number of Hopping Frequencies and Average Time of Occupancy	Complied
Part 15.247(b)(1)	Transmitter Maximum Peak Output Power	Complied
Part 15.247(d) & 15.209(a)	Transmitter Radiated Emissions	Complied
Part 15.247(d) & 15.209(a)	Transmitter Band Edge Radiated Emissions	Complied

Note(s):

1. There are two vendors of the WiFi/*Bluetooth* radio modules, Vendor 1 and Vendor 2.

The WiFi/*Bluetooth* radio modules have the same mechanical outline (i.e. the same packaging dimension and pin layout), use the same on-board antenna matching circuit, have an identical antenna structure and are built and tested to conform to the same specification and to operate within the same tolerances.

Baseline testing was performed on the two vendors to determine the worst case.

1.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

2. Summary of Testing

2.1. Facilities and Accreditation

The test site and measurement facilities used to collect data are located at Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, United Kingdom. The following table identifies which facilities were utilised for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

Site 1	X
Site 2	-
Site 17	X

UL VS LTD is accredited by UKAS. The tests reported herein have been performed in accordance with its terms of accreditation.

2.2. Methods and Procedures

Reference:	ANSI C63.10-2013
Title:	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
Reference:	KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019
Title:	Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating Under Section 15.247 of the FCC Rules

2.3. Calibration and Uncertainty

Measuring Instrument Calibration

In accordance with UKAS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value measured (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
20 dB Bandwidth	2.4 GHz to 2.4835 GHz	95%	$\pm 4.59 \%$
Carrier Frequency Separation	2.4 GHz to 2.4835 GHz	95%	$\pm 4.59 \%$
Average Time of Occupancy	2.4 GHz to 2.4835 GHz	95%	$\pm 3.53 \text{ ns}$
Conducted Maximum Peak Output Power	2.4 GHz to 2.4835 GHz	95%	$\pm 1.13 \text{ dB}$
Radiated Spurious Emissions	30 MHz to 1 GHz	95%	$\pm 4.65 \text{ dB}$
Radiated Spurious Emissions	1 GHz to 26.5 GHz	95%	$\pm 2.94 \text{ dB}$

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

2.4. Test and Measurement Equipment

Test Equipment Used for Transmitter Conducted Tests

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2024	Thermohygrometer	Testo	608-H1	45124926	06 Jan 2020	12
A2506	Attenuator	AtlanTecRF	AN18-10	821846#1	Calibrated before use	-
M199	Power Meter	Rohde & Schwarz	NRVS	827023/075	20 Apr 2020	24
M1267	Power Sensor	Rohde & Schwarz	NRV-Z52	100155	20 Apr 2020	24
G0628	Signal Generator	Rohde & Schwarz	SMBV100A	261847	01 Sep 2020	36
M1996	Signal Analyser	Rohde & Schwarz	FSV13	100975	16 Jan 2020	12

Test Equipment Used for Transmitter Radiated Emissions

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2040	Thermohygrometer	Testo	608-H1	45124934	06 Jan 2020	12
K0001	5m RSE Chamber	Rainford EMC	N/A	N/A	04 Oct 2019	12
M2044	Test Receiver	Rohde & Schwarz	ESU26	100122	01 Apr 2020	12
A3154	Pre-Amplifier	Com-Power	PAM-103	18020012	14 Sep 2019	12
A3179	Pre Amplifier	Hewlett Packard	8449B	3008A00934	04 Apr 2020	12
A553	Antenna	Chase	CBL6111A	1593	08 Oct 2019	12
A3138	Antenna	Schwarzbeck	BBHA 9120 B	00702	03 Oct 2019	12
A3112	Attenuator	AtlanTecRF	AN18-06	219706#2	08 Oct 2019	12
A2523	Attenuator	AtlanTechRF	AN18W5-10	832827#1	04 Mar 2020	12
A3085	Low Pass Filter	AtlanTecRF	AFL-02000	18051600014	09 Apr 2020	12
A3093	High Pass Filter	AtlanTecRF	AFH-03000	18051800077	09 Apr 2020	12
M2003	Thermohygrometer	Testo	608-H1	45046641	06 Jan 2020	12
K0017	3m RSE Chamber	Rainford EMC	N/A	N/A	26 Feb 2020	12
M1630	Test Receiver	Rohde & Schwarz	ESU40	100233	02 Nov 2019	12
A2890	Antenna	Schwarzbeck	HWRD 750	014	12 Feb 2020	12
A3142	Pre Amplifier	Schwarzbeck	BBV9718B	00020	12 Feb 2020	12

Test and Measurement Equipment (continued)**Test Equipment Used for Transmitter Band Edge Radiated Emissions**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2003	Thermohygrometer	Testo	608-H1	45046641	06 Jan 2020	12
K0017	3m RSE Chamber	Rainford EMC	N/A	N/A	26 Feb 2020	12
M1630	Test Receiver	Rohde & Schwarz	ESU40	100233	02 Nov 2019	12
A2863	Pre Amplifier	Agilent	8449B	3008A02100	12 Feb 2020	12
A2916	Attenuator	AtlanTecRF	AN18W5-10	832827#1	20 Feb 2020	12
A2889	Antenna	Schwarzbeck	BBHA 9120 B	BBHA 9120 B 653	12 Feb 2020	12

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	Apple
Model Name or Number:	A1991
Test Sample Serial Number:	C02YD003MFLQ (<i>Conducted Sample #1</i>)
Hardware Version:	REV 1.0
Software Version:	18F98
FCC ID:	BCGA1991

Brand Name:	Apple
Model Name or Number:	A1991
Test Sample Serial Number:	C02YF007MFLF (<i>Conducted Sample #2</i>)
Hardware Version:	REV 1.0
Software Version:	18F98
FCC ID:	BCGA1991

Brand Name:	Apple
Model Name or Number:	A1991
Test Sample Serial Number:	C02YF00CMFLF (<i>Radiated Sample #1</i>)
Hardware Version:	REV 1.0
Software Version:	18F98
FCC ID:	BCGA1991

Brand Name:	Apple
Model Name or Number:	A1991
Test Sample Serial Number:	C02YD006MFLQ (<i>Radiated Sample #2</i>)
Hardware Version:	REV 1.0
Software Version:	18F98
FCC ID:	BCGA1991

3.2. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.3. Additional Information Related to Testing

Tested Technology:	<i>Bluetooth</i>				
Power Supply Requirement:	Nominal	Constant 3.8 VDC via 120 VAC 60 Hz AC/DC supply			
Type of Unit:	Transceiver				
Channel Spacing:	1 MHz				
Mode:	Basic Rate	Enhanced Data Rate			
Modulation:	GFSK	$\pi/4$ -DQPSK	8DPSK		
Packet Type: (Maximum Payload)	DH5	2DH5	3DH5		
Data Rate (Mbps):	1	2	3		
Maximum Conducted Output Power:	13.3 dBm				
Transmit Frequency Range:	2402 MHz to 2480 MHz				
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)		
	Bottom	0	2402		
	Middle	39	2441		
	Top	78	2480		

3.4. Description of Available Antennas

The radio utilizes an integrated antenna, with the following maximum gain:

Frequency Range (MHz)	Antenna Gain (dBi)
2400-2480	4.5

3.5. Description of Test Setup

Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	Test Laptop
Brand Name:	Apple
Model Name or Number:	MacBook Pro
Serial Number:	C02Q81PFG3QD

Description:	USB Keyboard
Brand Name:	Apple
Model Name or Number:	A1243
Serial Number:	C02T300BHXOX

Description:	USB Mouse
Brand Name:	Apple
Model Name or Number:	A1152
Serial Number:	Not marked or stated

Description:	Personal Hands Free (PHF)
Brand Name:	Apple
Model Name or Number:	Apple EarPods
Serial Number:	Not marked or stated

Description:	USB-C to USB Adapter. Quantity 4
Brand Name:	Apple
Model Name or Number:	A1632
Serial Number:	Not marked or stated

Description:	HDMI Monitor
Brand Name:	Dell
Model Name or Number:	S2218H
Serial Number:	Not marked or stated

Description:	USB Hub
Brand Name:	Hama
Model Name or Number:	0078498
Serial Number:	09825891600

Support Equipment (continued)

Description:	Ethernet Router
Brand Name:	Netgear
Model Name or Number:	GS605v3
Serial Number:	1YG194390218E

Description:	Ethernet Cable. Length 3.0 metres. Quantity 2
Brand Name:	Not marked or stated
Model Name or Number:	Not marked or stated
Serial Number:	Not marked or stated

Description:	HDMI Cable. Length 3.0 metres. Quantity 2
Brand Name:	Not marked or stated
Model Name or Number:	Not marked or stated
Serial Number:	Not marked or stated

Description:	USB Cable. Length 3.0 metres. Quantity 3
Brand Name:	Not marked or stated
Model Name or Number:	Not marked or stated
Serial Number:	Not marked or stated

Description:	HDMI Hub
Brand Name:	Not marked or stated
Model Name or Number:	Not marked or stated
Serial Number:	Not marked or stated

Operating Modes

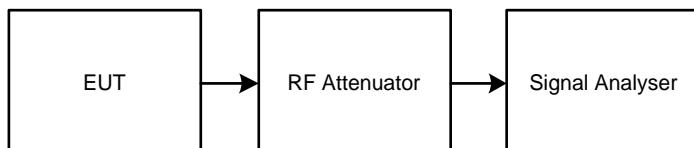
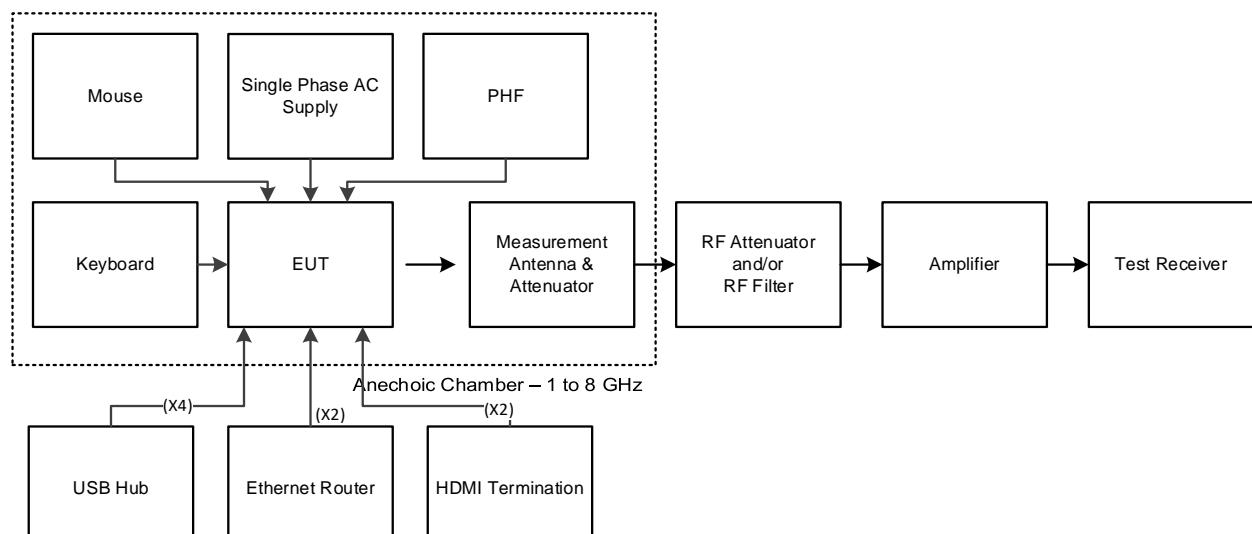
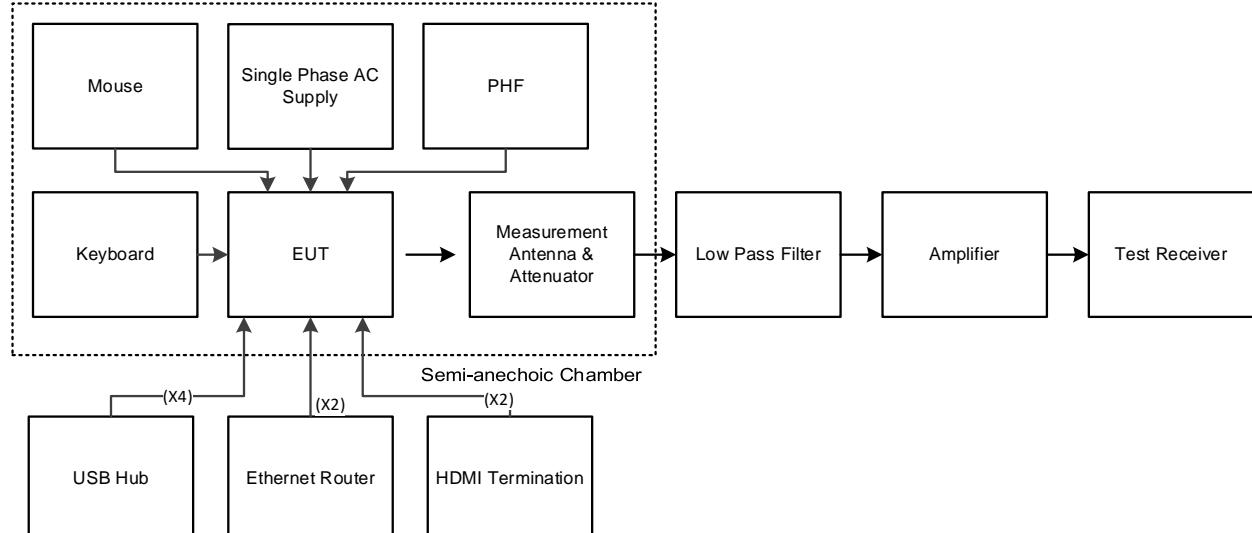
The EUT was tested in the following operating mode(s):

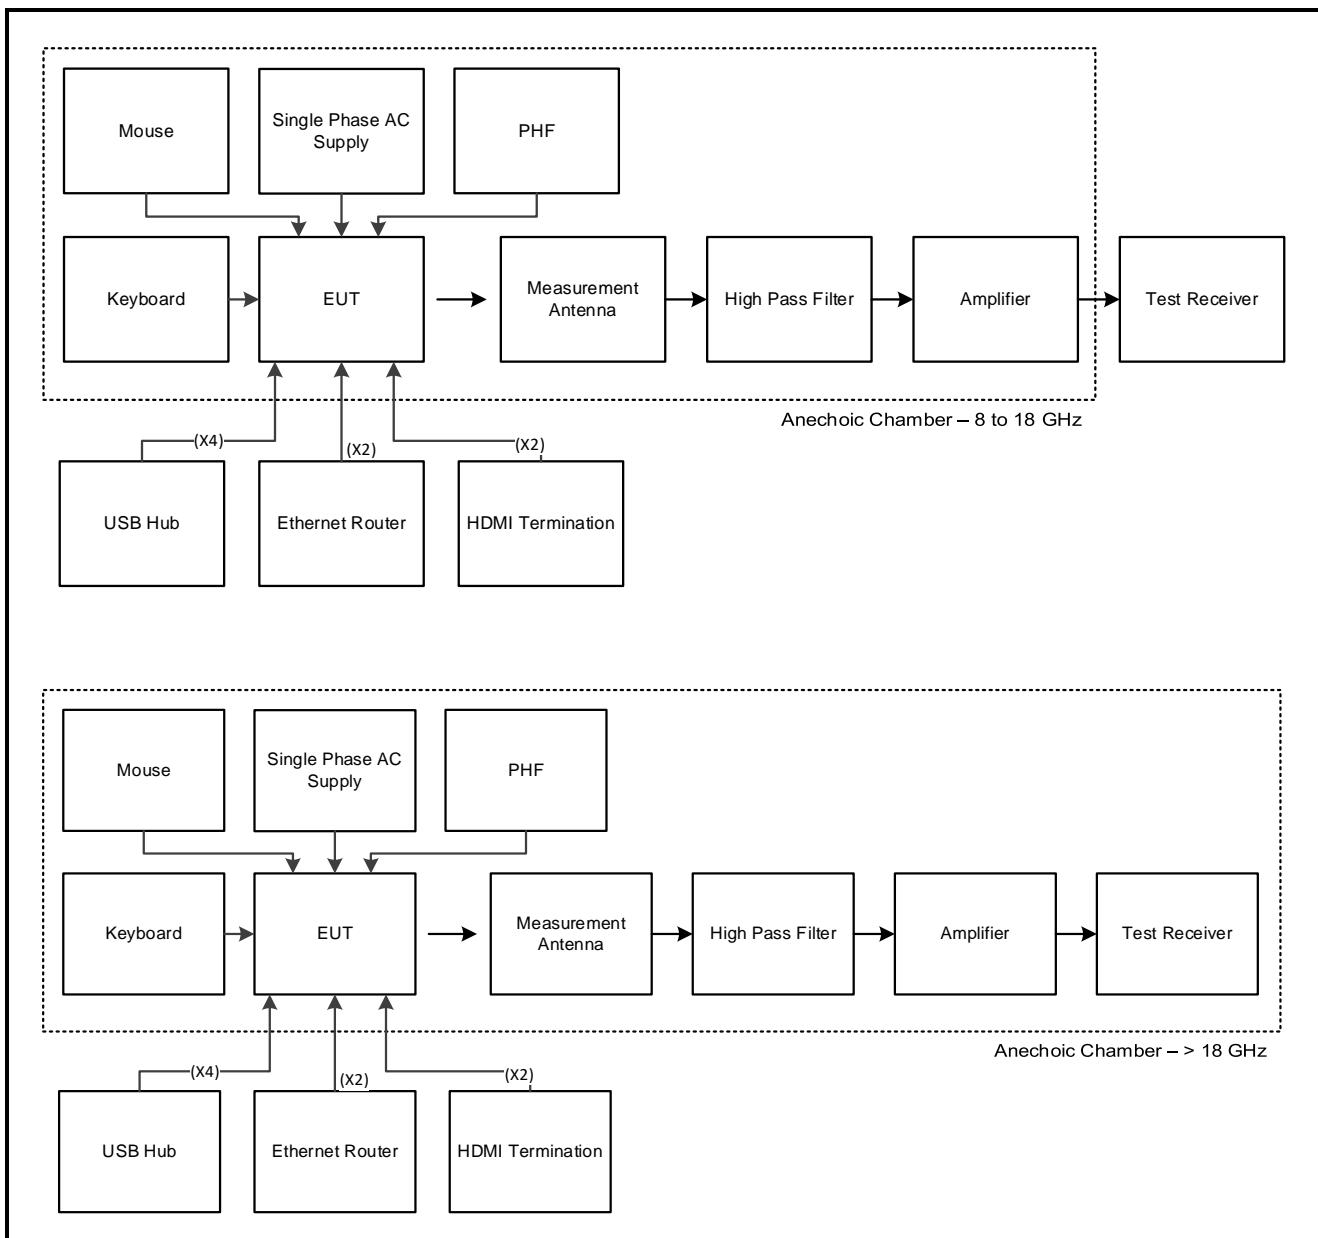
- Continuously transmitting at maximum power on bottom, middle and top channels in Basic Rate (DH5 packets) or EDR (2DH5 or 3DH5 packets) as required.
- Continuously transmitting at maximum power in hopping mode on all channels in Basic Rate (DH5 packets) or EDR (2DH5 or 3DH5 packets) as required.

Configuration and Peripherals

The EUT was tested in the following configuration(s):

- Controlled in test mode using a set of commands entered into a terminal application on the EUT supplied by the customer. The commands were used to enable a continuous transmission and to select the test channels as required. The customer supplied a document containing the setup instructions 'EUT_BT_SOP.docx'.
- The EUT was powered from a 120 VAC 60 Hz single phase mains supply.
- Transmitter radiated spurious emissions tests were performed with the EUT transmitting in DH5 mode as this mode was found to transmit the highest power.
- Transmitter radiated spurious emissions tests were performed with the USB Keyboard, USB Mouse and PHF connected to the EUT. The remaining USB ports were connected with a USB cable to a hub. The USB-C ports were connected via a USB C-A adaptor and USB cable to a hub. The ethernet ports were terminated into a router. The HDMI ports were terminated into a hub. The router and hubs were placed under the floor inside the chamber.

Test Setup Diagrams**Conducted Tests:****Test Setup for Transmitter 20 dB Bandwidth, Carrier Frequency Separation, Number of Hopping Frequencies and Average Time of Occupancy & Maximum Peak Output Power****Radiated Tests:****Test Setup for Transmitter Radiated Emissions**

Test Setup Diagrams (continued)**Test Setup for Transmitter Radiated Emissions (continued)**

4. Antenna Port Test Results

4.1. Transmitter 20 dB Bandwidth

Test Summary:

Test Engineer:	Victor Carmon	Test Dates:	15 May 2019 & 16 May 2019
Test Sample Serial Number:	C02YD003MFLQ		

FCC Reference:	Part 15.247(a)(1)
Test Method Used:	ANSI C63.10 Section 6.9.2

Environmental Conditions:

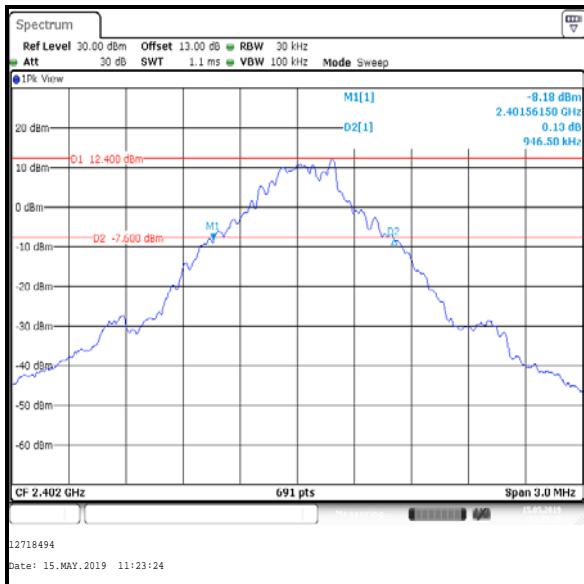
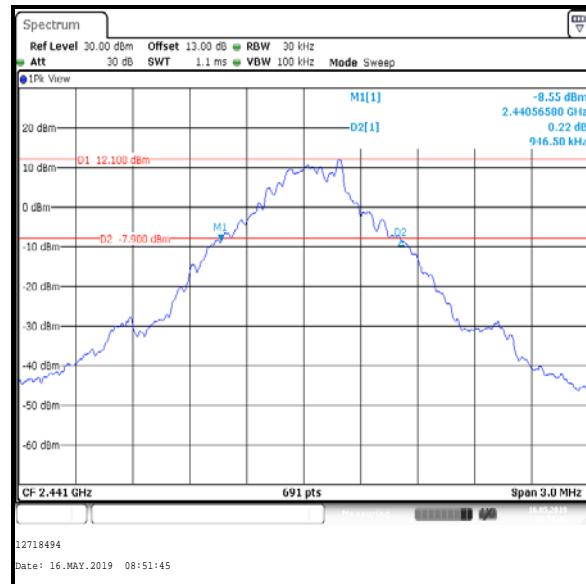
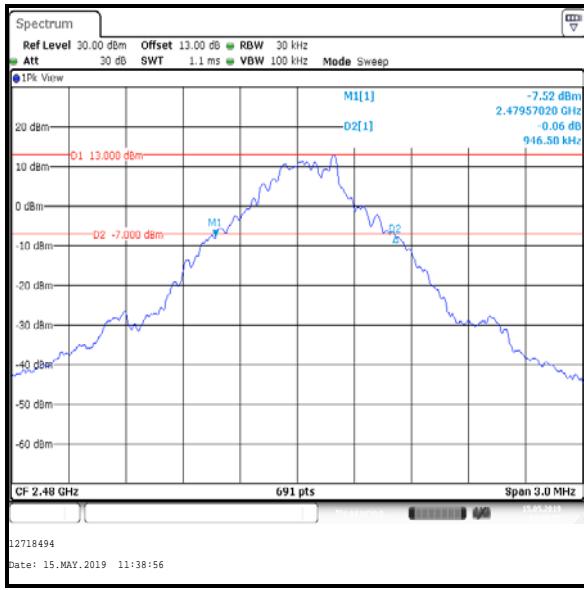
Temperature (°C):	22 to 24
Relative Humidity (%):	37 to 43

Note(s):

1. The signal analyser resolution bandwidth was set to 30 kHz and video bandwidth 100 kHz. A peak detector was used, sweep time was set to auto and the trace mode was Max Hold. The span was set to 3 MHz. Normal and delta markers were placed 20 dB down from the peak of the carrier.
2. The signal analyser was connected to the RF port on the EUT using suitable attenuation and RF cable.

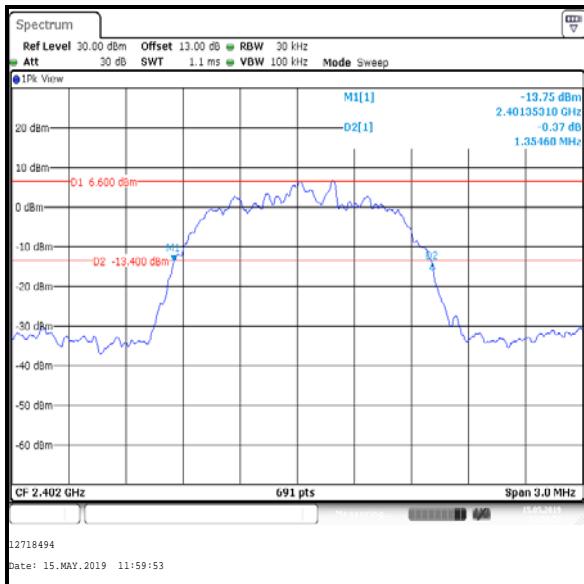
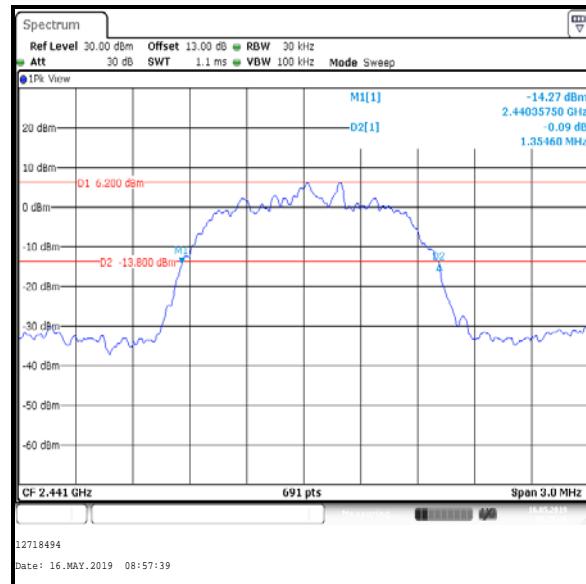
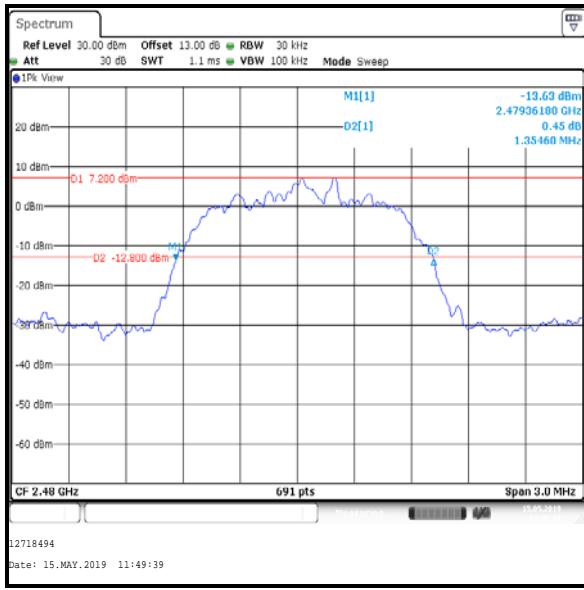
Transmitter 20 dB Bandwidth (continued)**Results DH5:**

Channel	20 dB Bandwidth (kHz)
Bottom	946.500
Middle	946.500
Top	946.500

**Bottom Channel****Middle Channel****Top Channel**

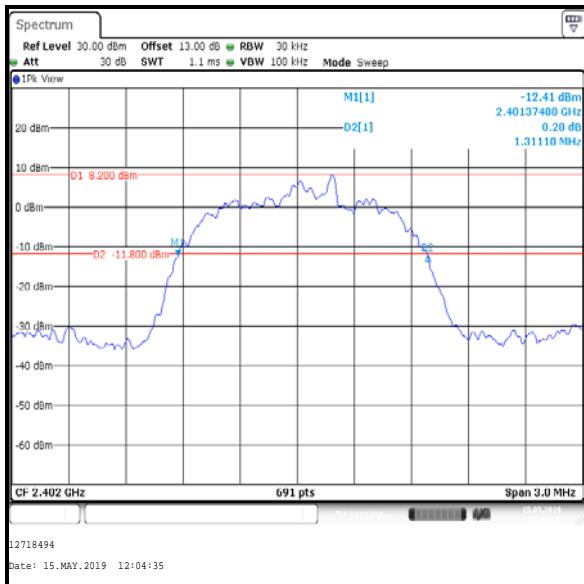
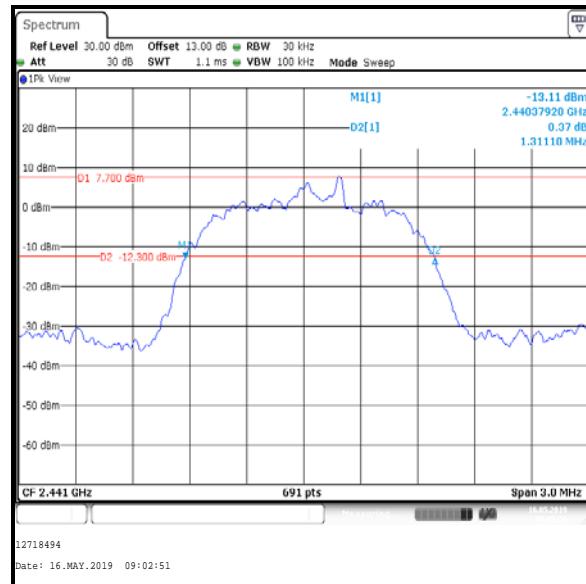
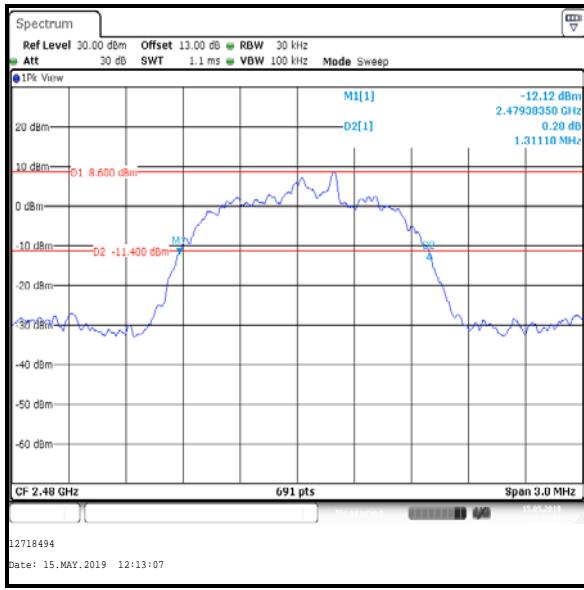
Transmitter 20 dB Bandwidth (continued)**Results 2DH5:**

Channel	20 dB Bandwidth (kHz)
Bottom	1354.600
Middle	1354.600
Top	1354.600

**Bottom Channel****Middle Channel****Top Channel**

Transmitter 20 dB Bandwidth (continued)**Results 3DH5:**

Channel	20 dB Bandwidth (kHz)
Bottom	1311.100
Middle	1311.100
Top	1311.100

**Bottom Channel****Middle Channel****Top Channel**

4.2. Transmitter Carrier Frequency Separation

Test Summary:

Test Engineer:	Victor Carmon	Test Date:	15 May 2019
Test Sample Serial Number:	C02YD003MFLQ		

FCC Reference:	Part 15.247(a)(1)
Test Method Used:	ANSI C63.10 Section 7.8.2

Environmental Conditions:

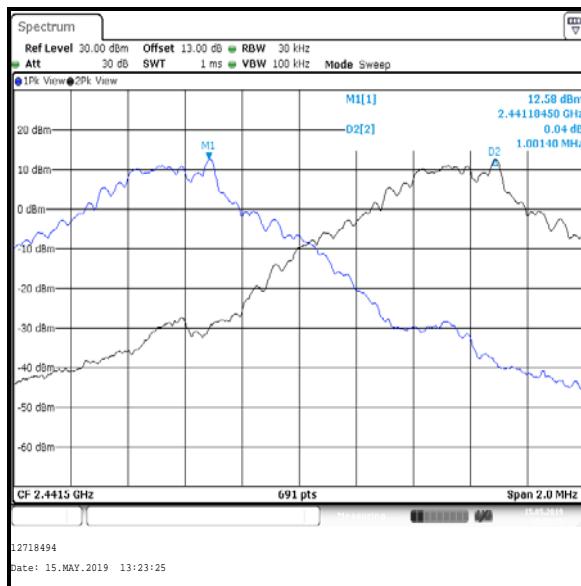
Temperature (°C):	22
Relative Humidity (%):	43

Note(s):

1. The 20 dB bandwidth measured for the middle channel operating at 2441 MHz was used to calculate the limit.
2. The spectrum analyser resolution bandwidth was set to 30 kHz and video bandwidth 100 kHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. The span was set to 2 MHz. A marker was placed at the centre of one signal and then a delta marker was placed in the same place on the second signal.
3. The spectrum analyser was connected to the RF port on the EUT using suitable attenuation and RF cable.

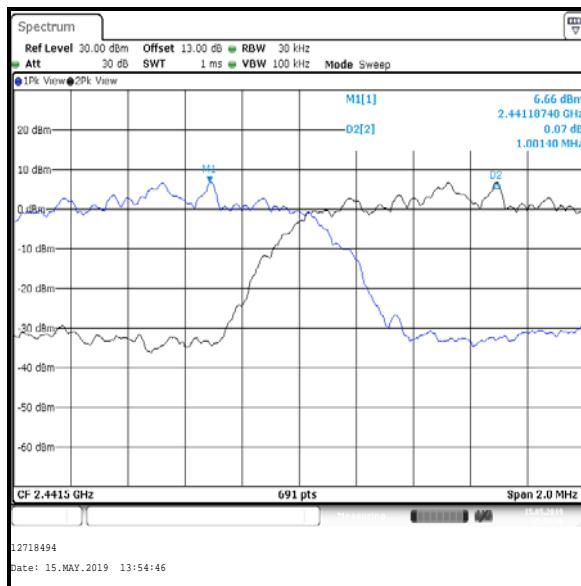
Transmitter Carrier Frequency Separation (continued)**Results: DH5**

Carrier Frequency Separation (kHz)	Limit $\frac{2}{3}$ of 20 dB BW (kHz)	Margin (kHz)	Result
1001.400	631.000	370.400	Complied



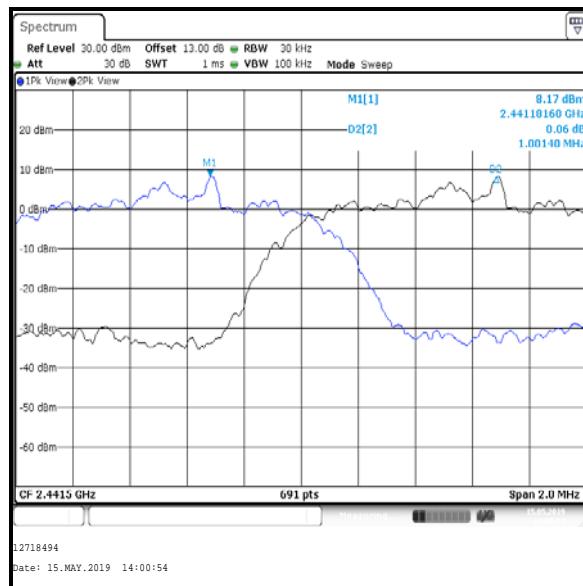
Transmitter Carrier Frequency Separation (continued)**Results: 2DH5**

Carrier Frequency Separation (kHz)	Limit (2/3 of 20 dB BW) (kHz)	Margin (kHz)	Result
1001.400	903.067	98.333	Complied



Transmitter Carrier Frequency Separation (continued)**Results: 3DH5**

Carrier Frequency Separation (kHz)	Limit $\frac{2}{3}$ of 20 dB BW (kHz)	Margin (kHz)	Result
1001.400	874.067	127.333	Complied



4.3. Transmitter Number of Hopping Frequencies and Average Time of Occupancy

Test Summary:

Test Engineer:	Victor Carmon	Test Date:	15 May 2019
Test Sample Serial Number:	C02YD003MFLQ		

FCC Reference:	Part 15.247(a)(1)(iii)
Test Method Used:	ANSI C63.10 Sections 7.8.3 & 7.8.4

Environmental Conditions:

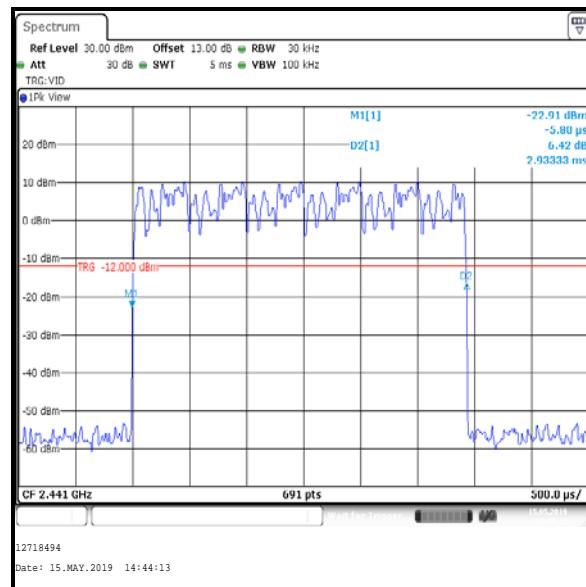
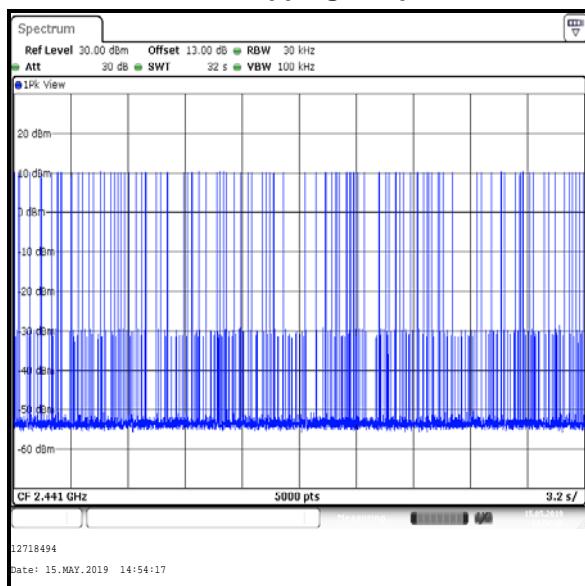
Temperature (°C):	22
Relative Humidity (%):	43

Note(s):

1. Tests were performed to identify the average time of occupancy in number of channels (79) x 0.4 seconds. The calculated period is 31.6 seconds.
2. The signal analyser was set up for the Number of Hopping Frequencies measurement as follows: the resolution bandwidth was set to 30 kHz and video bandwidth of 100 kHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. The span was set to 83.5 MHz.
3. The signal analyser was set up for the Emission Width measurement as follows: the resolution bandwidth was set to 30 kHz and video bandwidth of 100 kHz. A peak detector was used and sweep time was set to auto with a span of zero Hz. The signal analyser was set to trigger at 0.5 ms, with a marker placed at the start of the emission and a delta marked place at the end of the emission. The emission width is recorded in the table below
4. The signal analyser was set up for the Number of Hopping Frequencies in 32 seconds measurement as follows: the resolution bandwidth was set to 100 kHz and video bandwidth of 300 kHz. A peak detector was used and sweep time was set to 32 seconds. The EUT was set to transmit in a hopping frequency mode with zero span. The total number of hopping frequencies were recorded in the table below.
5. The signal analyser was connected to the RF port on the EUT using suitable attenuation and RF cable.

Transmitter Number of Hopping Frequencies and Average Time of Occupancy (continued)**Results:**

Emission Width (μs)	Number of Hops in 31.6 Seconds	Average Time of Occupancy (s)	Limit (s)	Margin (s)	Result
2933.3	108	0.317	0.4	0.083	Complied

**Number of Hopping Frequencies****Emission Width****Number of Hopping Frequencies in 32 s**

4.4. Transmitter Maximum Peak Output Power

Test Summary:

Test Engineer:	Victor Carmon	Test Date:	26 May 2019
Test Sample Serial Number:	C02YF007MFLF		

FCC Reference:	Part 15.247(b)(1)
Test Method Used:	ANSI C63.10 Section 7.8.5

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	45

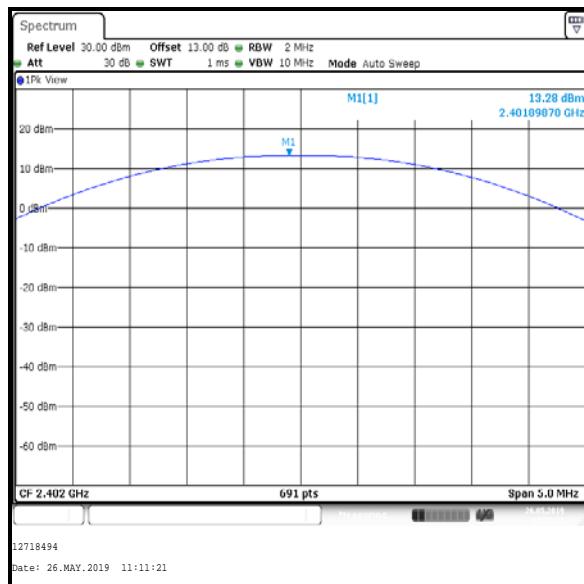
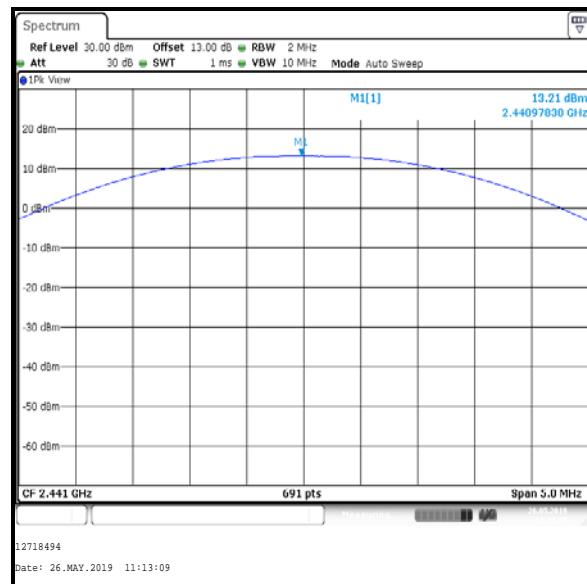
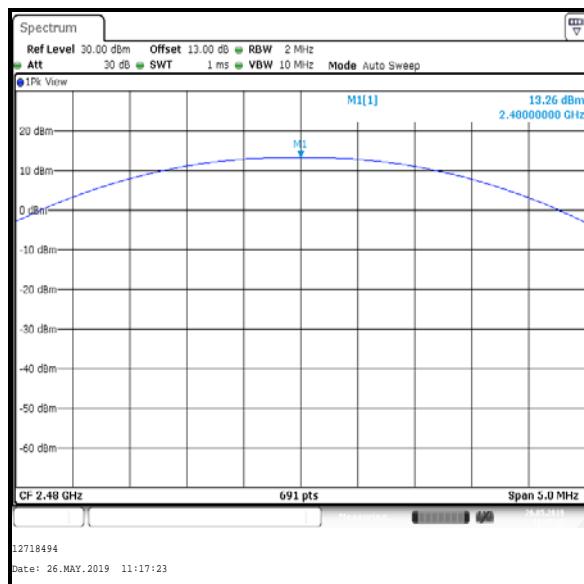
Note(s):

1. The signal analyser resolution bandwidth was set to 2 MHz (>20 dB bandwidth) and video bandwidth of 10 MHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. The span was set to 5 MHz (approximately five times the 20 dB bandwidth). A marker was placed at the peak of the signal and the results recorded in the tables below.
2. The declared antenna gain was added to the conducted peak power to obtain the EIRP.
3. The signal analyser was connected to the RF port on the EUT using suitable attenuation and RF cable. An RF offset level was entered on the signal analyser to compensate for the loss of the attenuator and RF cable.

Transmitter Maximum Peak Output Power (continued)**Results: DH5**

Channel	Conducted Peak Power (dBm)	Conducted Peak Power Limit (dBm)	Margin (dB)	Result
Bottom	13.3	30.0	16.7	Complied
Middle	13.2	30.0	16.8	Complied
Top	13.3	30.0	16.7	Complied

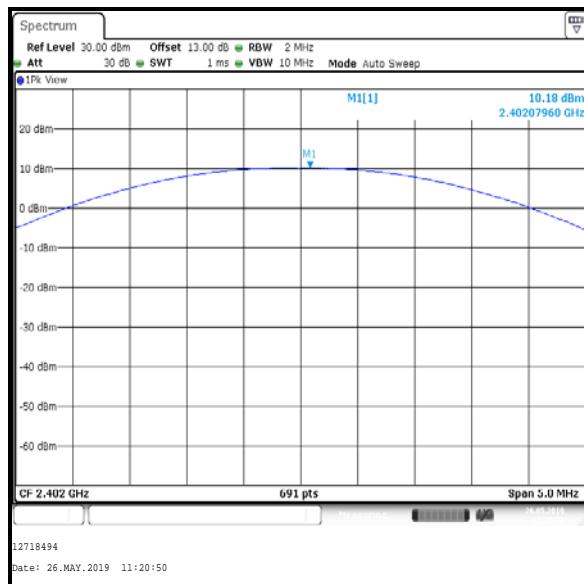
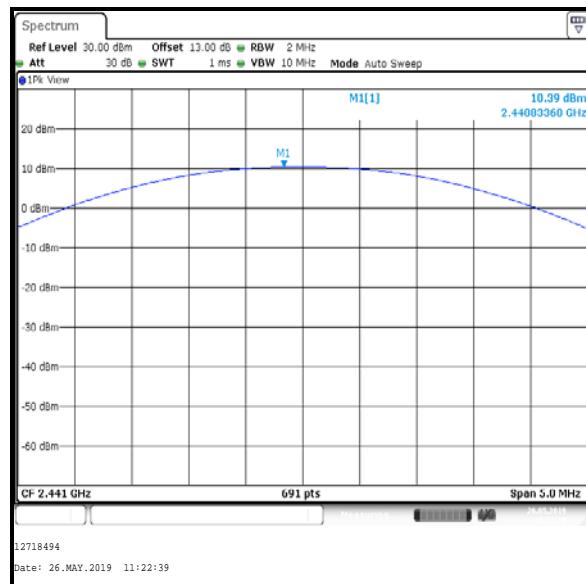
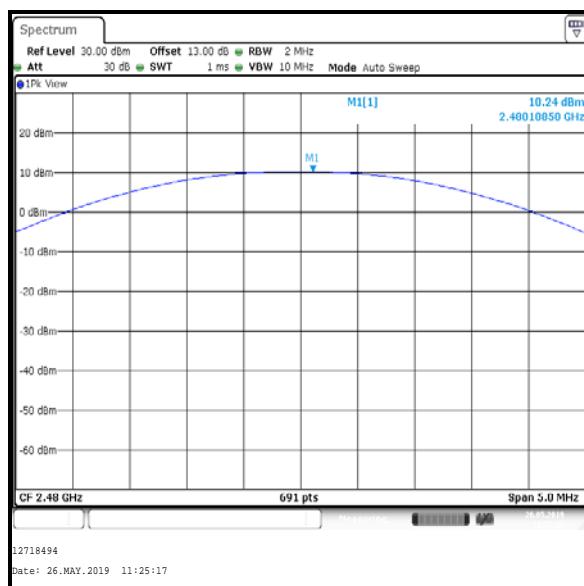
Channel	Conducted Peak Power (dBm)	Declared Antenna Gain (dBi)	EIRP (dBm)	De Facto EIRP Limit (dBm)	Margin (dB)	Result
Bottom	13.3	4.5	17.8	36.0	18.2	Complied
Middle	13.2	4.5	17.7	36.0	18.3	Complied
Top	13.3	4.5	17.8	36.0	18.2	Complied

Transmitter Maximum Peak Output Power (continued)**Results: DH5****Bottom Channel****Middle Channel****Top Channel**

Transmitter Maximum Peak Output Power (continued)**Results: 2DH5**

Channel	Conducted Peak Power (dBm)	Conducted Peak Power Limit (dBm)	Margin (dB)	Result
Bottom	10.2	21.0	10.8	Complied
Middle	10.4	21.0	10.6	Complied
Top	10.2	21.0	10.8	Complied

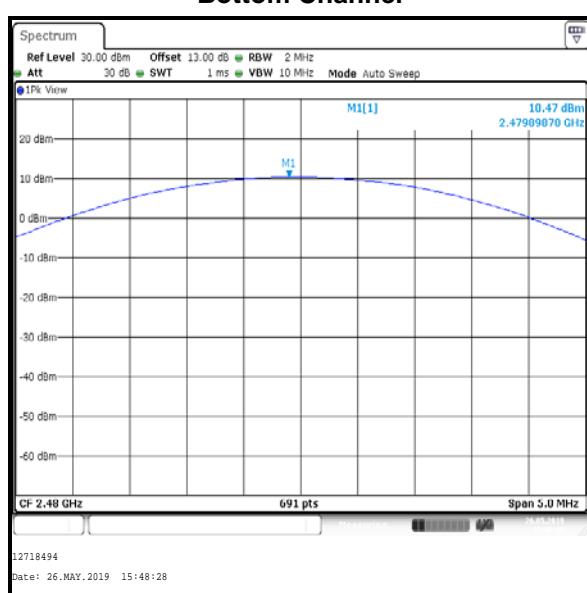
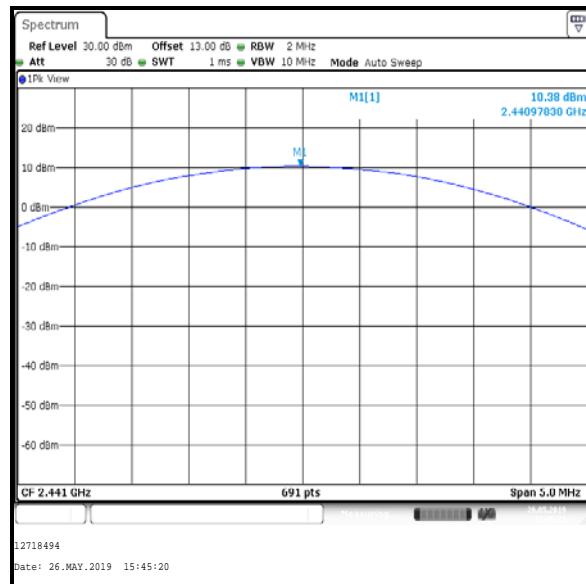
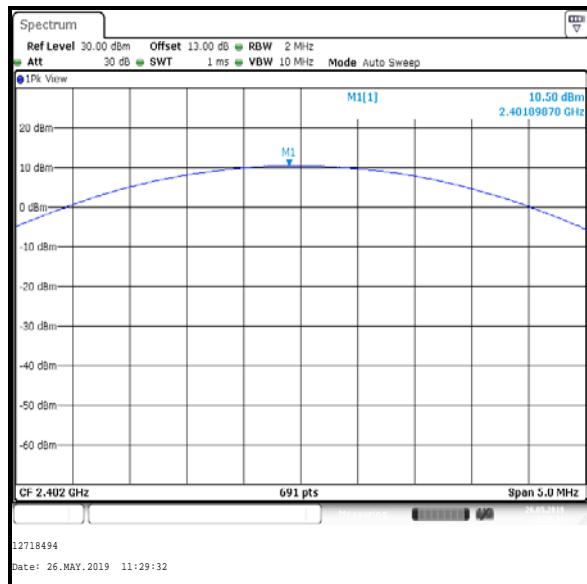
Channel	Conducted Peak Power (dBm)	Declared Antenna Gain (dBi)	EIRP (dBm)	De Facto EIRP Limit (dBm)	Margin (dB)	Result
Bottom	10.2	4.5	14.7	27.0	12.3	Complied
Middle	10.4	4.5	14.9	27.0	12.1	Complied
Top	10.2	4.5	14.7	27.0	12.3	Complied

Transmitter Maximum Peak Output Power (continued)**Results: 2DH5****Bottom Channel****Middle Channel****Top Channel**

Transmitter Maximum Peak Output Power (continued)**Results: 3DH5**

Channel	Conducted Peak Power (dBm)	Conducted Peak Power Limit (dBm)	Margin (dB)	Result
Bottom	10.5	21.0	10.5	Complied
Middle	10.4	21.0	10.6	Complied
Top	10.5	21.0	10.5	Complied

Channel	Conducted Peak Power (dBm)	Declared Antenna Gain (dBi)	EIRP (dBm)	De Facto EIRP Limit (dBm)	Margin (dB)	Result
Bottom	10.5	4.5	15.0	27.0	12.0	Complied
Middle	10.4	4.5	14.9	27.0	12.1	Complied
Top	10.5	4.5	15.0	27.0	12.0	Complied

Transmitter Maximum Peak Output Power (continued)**Results: 3DH5**

5. Radiated Test Results

5.1. Transmitter Radiated Emissions <1 GHz

Test Summary:

Test Engineer:	Andrew Harding	Test Date:	25 May 2019
Test Sample Serial Number:	C02YD006MFLQ		

FCC Reference:	Parts 15.247(d) & 15.209(a)
Test Method Used:	ANSI C63.10 Sections 6.3 and 6.5
Frequency Range	30 MHz to 1000 MHz

Environmental Conditions:

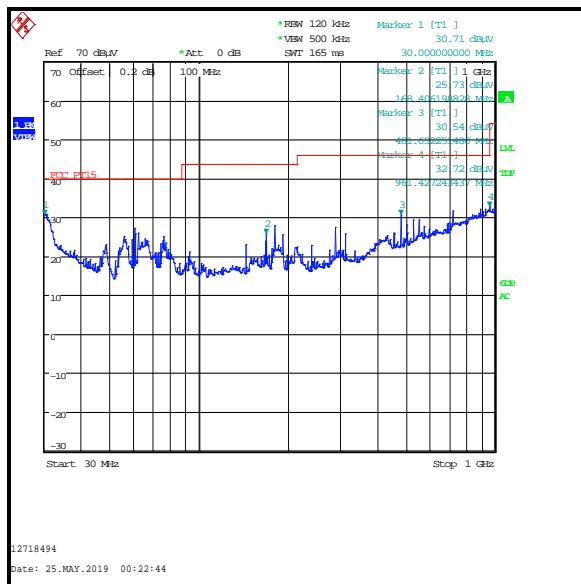
Temperature (°C):	21 to 23
Relative Humidity (%):	37 to 38

Note(s):

1. Transmitter radiated spurious emissions tests were performed with the EUT transmitting in DH5 mode as this was found to transmit the highest power and therefore deemed worst case.
2. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
3. The emissions stated below were found to be independent of wireless technology.
4. All other emissions shown on the pre-scan plot were investigated and found to be ambient or >20 dB below the applicable limit or below the measurement system noise floor.
5. The preliminary scans showed similar emission levels below 1 GHz, for each channel of operation. Therefore final radiated emissions measurements were performed with the EUT set to the middle channel only.
6. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
7. Pre-scans were performed and markers placed on the highest measured levels. The test receiver resolution bandwidth was set to 120 kHz and video bandwidth 500 kHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold.
8. Final measurements were performed on the marker frequencies and the results entered into the table below. The test receiver resolution bandwidth was set to 120 kHz, using a peak detector with max hold enabled. Span was wide enough to see the whole emission.

Transmitter Radiated Emissions (continued)**Results: Peak / DH5**

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
74.390	Horizontal	28.4	40.0	11.6	Complied
167.981	Horizontal	26.1	43.5	17.4	Complied
240.005	Horizontal	31.0	46.0	15.0	Complied
263.949	Horizontal	26.6	46.0	19.4	Complied



Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

5.2. Transmitter Radiated Emissions >1 GHz

Test Summary:

Test Engineers:	James O'Reilly & Andrew Harding	Test Dates:	10 May 2019 & 11 May 2019
Test Sample Serial Numbers:	C02YF00CMFLF & C02YD006MFLQ		

FCC Reference:	Parts 15.247(d) & 15.209(a)
Test Method Used:	ANSI C63.10 Sections 6.3 and 6.6
Frequency Range	1 GHz to 25 GHz

Environmental Conditions:

Temperature (°C):	21 to 23
Relative Humidity (%):	37 to 38

Note(s):

1. Transmitter radiated spurious emissions tests were performed with the EUT transmitting in DH5 mode as this was found to transmit the highest power and therefore deemed worst case.
2. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
3. All other emissions shown on the pre-scans were investigated and found to be ambient, or > 20 dB below the appropriate limit or below the noise floor of the measurement system.
4. The emission shown on the 1 GHz to 3 GHz plot is the EUT fundamental at 2441 MHz.
5. *In accordance with ANSI C63.10 Section 6.6.4.3 (Note 1), if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.
6. Pre-scans above 1 GHz were performed in a fully anechoic chamber (Asset Number K0001 or K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a semi anechoic chamber (Asset Number K0001 or K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
7. Pre-scans were performed and a marker placed on the highest measured level of the appropriate plot. The test receiver resolution bandwidth was set to 1 MHz and video bandwidth 3 MHz. The sweep time was set to auto. Peak and average measurements were performed with their own appropriate detectors during the pre-scan measurements.

Transmitter Radiated Emissions (continued)**Results: Peak / Bottom Channel / DH5**

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
15923.462	Vertical	57.2	74.0	16.8	Complied
23819.000	Vertical	51.5*	54.0	2.5	Complied

Results: Average / Bottom Channel / DH5

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
15944.936	Vertical	40.2	54.0	13.8	Complied

Results: Peak / Middle Channel / DH5

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
15923.462	Vertical	57.2	74.0	16.8	Complied
23819.000	Vertical	51.5*	54.0	2.5	Complied

Results: Average / Middle Channel / DH5

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
15944.936	Vertical	40.2	54.0	13.8	Complied

Results: Peak / Top Channel / DH5

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
15923.462	Vertical	57.2	74.0	16.8	Complied
23819.000	Vertical	51.5*	54.0	2.5	Complied

Results: Average / Top Channel / DH5

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
15944.936	Vertical	40.2	54.0	13.8	Complied

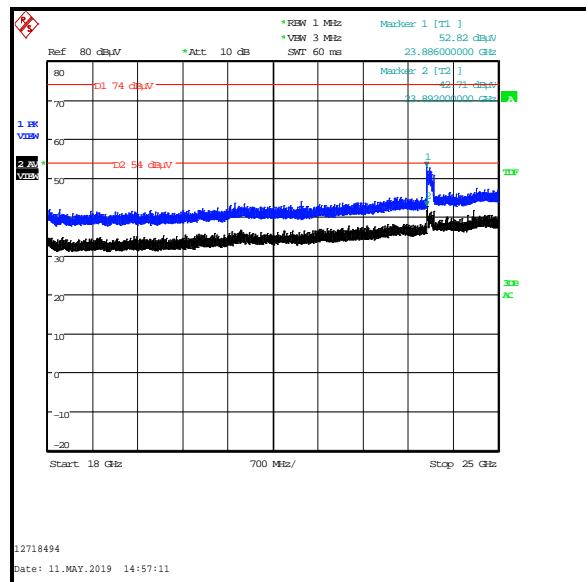
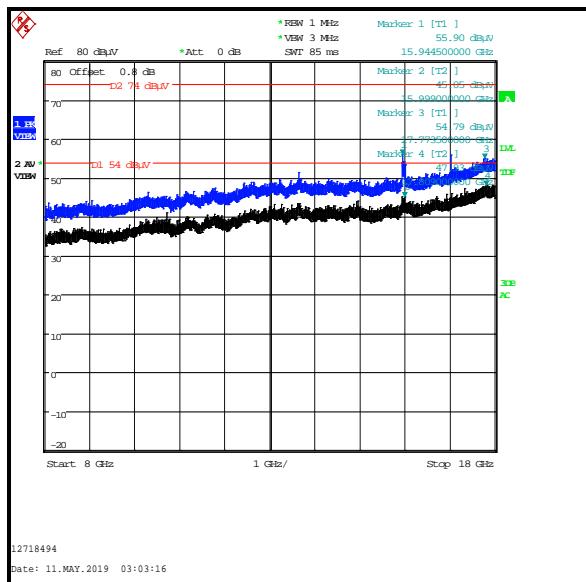
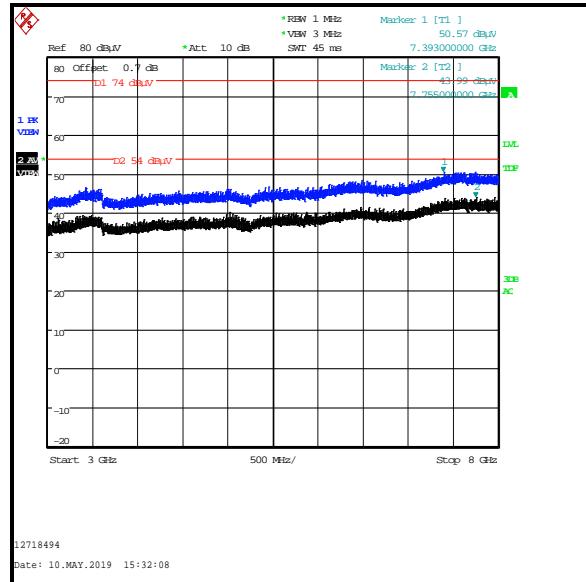
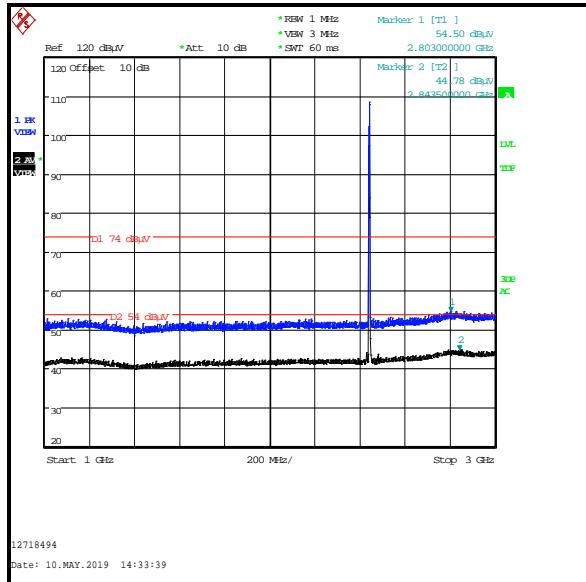
Transmitter Radiated Emissions (continued)**Results: Peak / Hopping Channel / DH5**

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
15923.462	Vertical	57.2	74.0	16.8	Complied
23819.000	Vertical	51.5*	54.0	2.5	Complied

Results: Average / Hopping Channel / DH5

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
15944.936	Vertical	40.2	54.0	13.8	Complied

Transmitter Radiated Emissions (continued)



Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

5.3. Transmitter Band Edge Radiated Emissions

Test Summary:

Test Engineer:	Nick Steele	Test Dates:	09 May 2019 & 10 May 2019
Test Sample Serial Number:	C02YF00CMFLF		

FCC Reference:	Parts 15.247(d) & 15.209(a)
Test Method Used:	ANSI C63.10 Section 6.10

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	40

Note(s):

1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. The lower band edge is adjacent to a non-restricted band. The test receiver resolution bandwidth was set to 100 kHz and video bandwidth 300 kHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. The test receiver was left to sweep for a sufficient length of time in order to maximise the carrier level and out-of-band emissions. A marker and corresponding reference level line were placed on the peak of the carrier. A marker was placed on the band edge spot frequencies and a second marker placed on the highest emission level in the adjacent band (where a higher level emission was present). Marker frequencies and levels were recorded.
3. The upper band edge is adjacent to a restricted band. The test receiver resolution bandwidth was set to 1 MHz and video bandwidth 3 MHz. Peak and average measurements were performed with their respective detectors, sweep time was set to auto and trace mode was Max Hold. The test receiver was left to sweep for a sufficient length of time in order to maximise the carrier level and out-of-band emissions. A marker was placed on the band edge spot frequencies and a second marker placed on the highest emission level in the adjacent band (where a higher level emission was present). Marker frequencies and levels were recorded.
4. There is a restricted band 10 MHz below the lower band edge. The test receiver was set up as follows: the RBW set to 1 MHz, the VBW set to 3 MHz, with the sweep time set to auto couple. Peak and average measurements were performed with their respective detectors. Markers were placed on the highest point on each trace.
5. * -20 dBc limit.

Transmitter Band Edge Radiated Emissions (continued)**Results: Static Mode / DH5**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2400.0	Vertical	51.8	91.0*	39.2	Complied
2483.5	Vertical	56.6	74.0	17.4	Complied

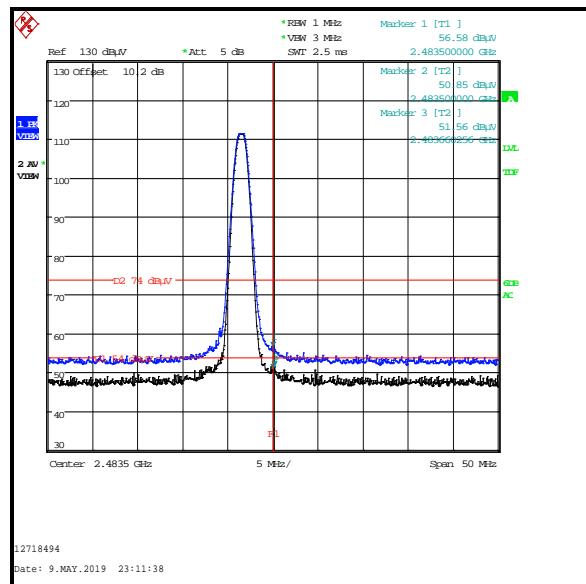
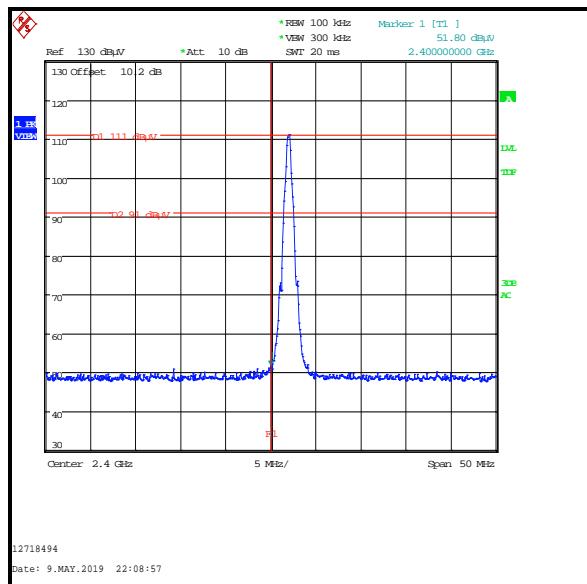
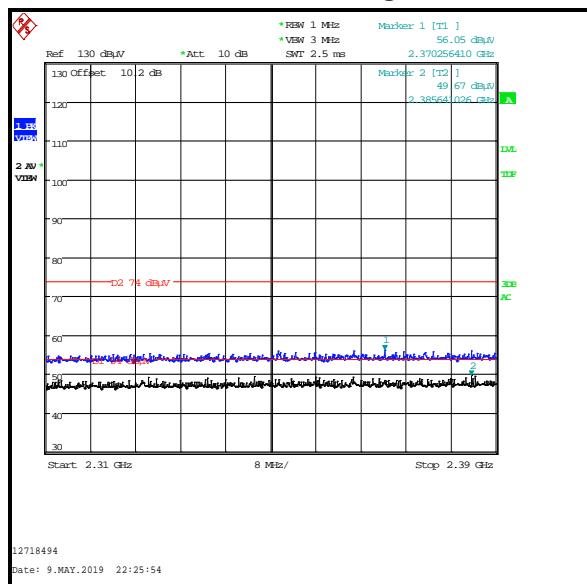
Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	50.9	54.0	3.1	Complied
2483.680	Vertical	51.6	54.0	2.4	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Peak

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2370.256	Vertical	56.1	74.0	17.9	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Average

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2385.641	Vertical	49.7	54.0	4.3	Complied

Transmitter Band Edge Radiated Emissions (continued)**Results: Static Mode / DH5****Lower Band Edge****Upper Band Edge****2310 MHz to 2390 MHz Restricted Band**

Transmitter Band Edge Radiated Emissions (continued)**Results: Hopping Mode / DH5**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2377.244	Vertical	50.8	91.2*	40.4	Complied
2400.0	Vertical	49.1	91.2*	42.1	Complied
2483.5	Vertical	55.2	74.0	18.8	Complied

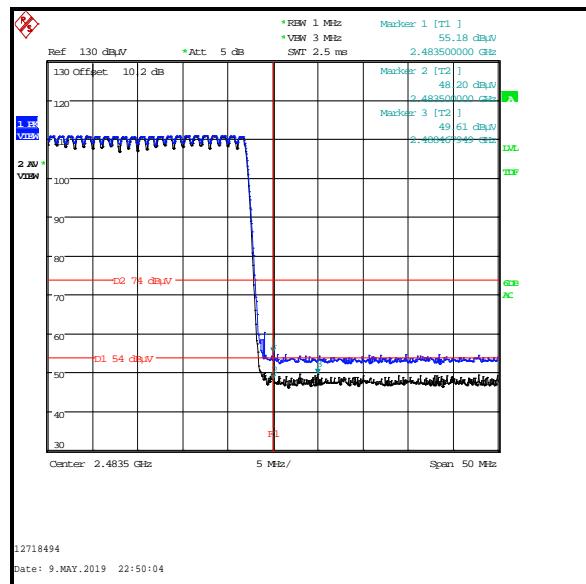
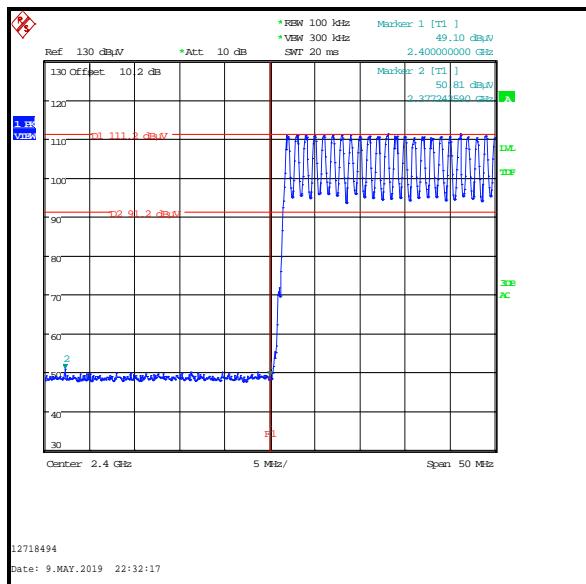
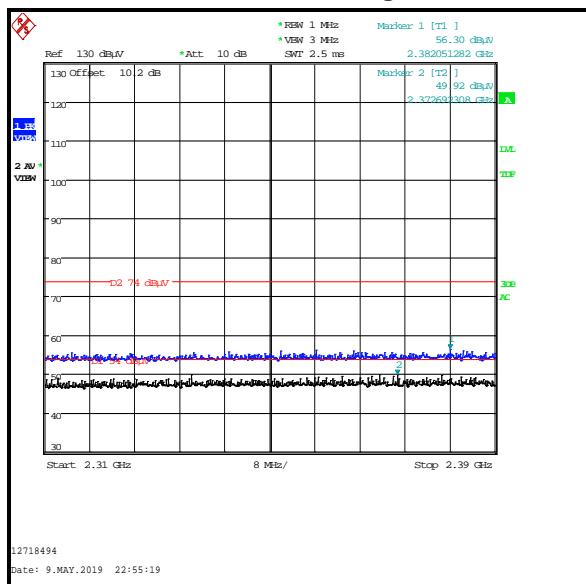
Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	48.2	54.0	5.8	Complied
2488.468	Vertical	49.6	54.0	4.4	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Peak

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2382.051	Vertical	56.3	74.0	17.7	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Average

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2372.692	Vertical	49.9	54.0	4.1	Complied

Transmitter Band Edge Radiated Emissions (continued)**Results: Hopping Mode / DH5****Lower Band Edge****Upper Band Edge****2310 MHz to 2390 MHz Restricted Band**

Transmitter Band Edge Radiated Emissions (continued)**Results: Static Mode / 2DH5**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2399.679	Vertical	56.4	86.2*	29.8	Complied
2400.0	Vertical	55.4	86.2*	30.8	Complied
2483.5	Vertical	56.0	74.0	18.0	Complied

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	49.8	54.0	4.2	Complied
2484.061	Vertical	50.1	54.0	3.9	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Peak

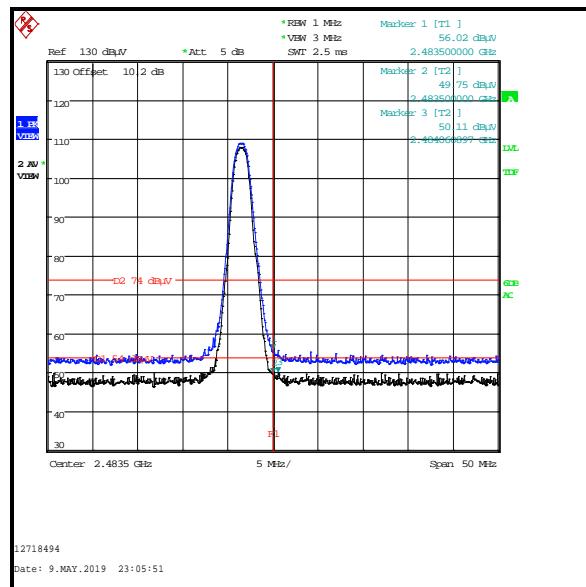
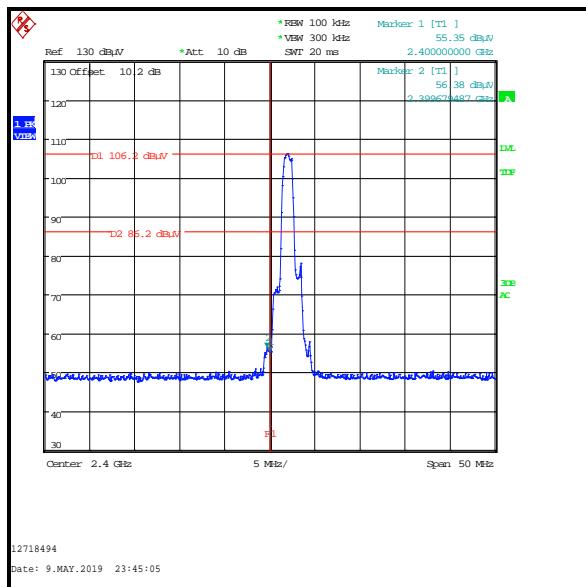
Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2374.103	Vertical	56.5	74.0	17.5	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Average

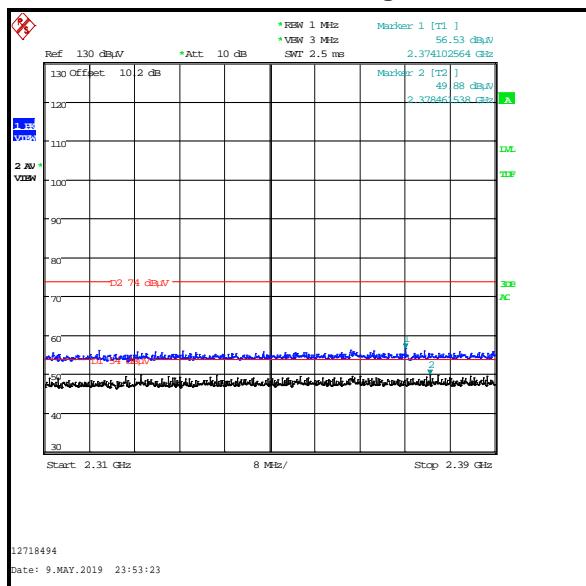
Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2378.462	Vertical	49.9	54.0	4.1	Complied

Transmitter Band Edge Radiated Emissions (continued)

Results: Static Mode / 2DH5



Lower Band Edge



Upper Band Edge

2310 MHz to 2390 MHz Restricted Band

Transmitter Band Edge Radiated Emissions (continued)**Results: Hopping Mode / 2DH5**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2399.679	Vertical	55.3	87.5*	32.2	Complied
2400.0	Vertical	52.8	87.5*	34.7	Complied
2483.5	Vertical	53.5	74.0	20.5	Complied
2502.490	Vertical	55.1	74.0	18.9	Complied

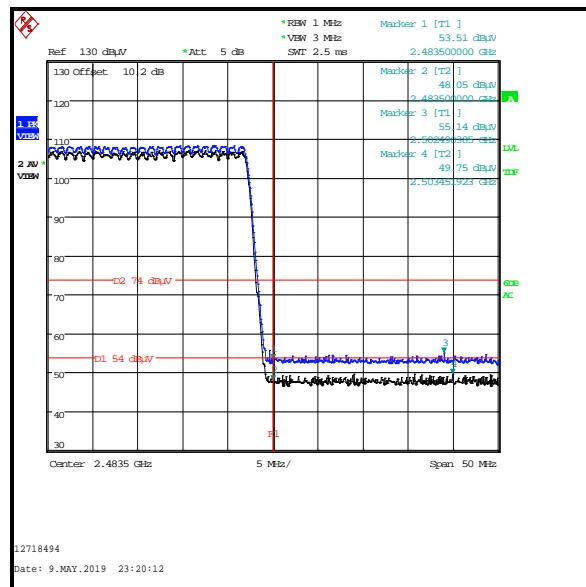
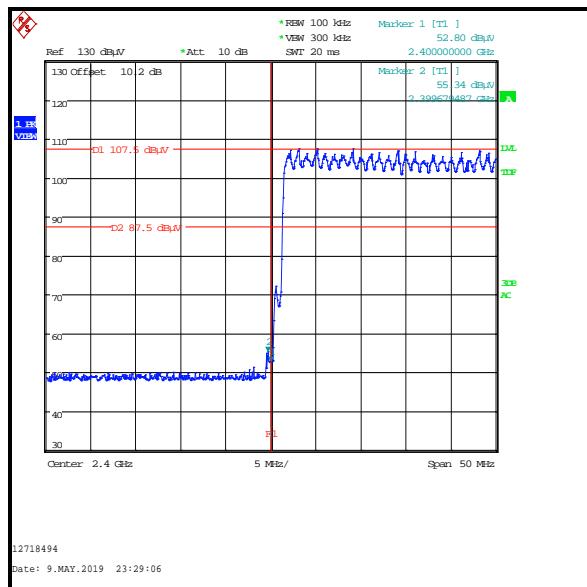
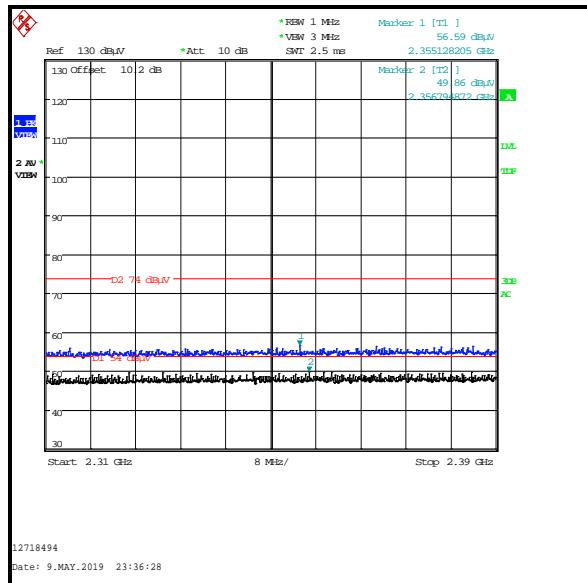
Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	48.1	54.0	5.9	Complied
2503.452	Vertical	49.8	54.0	4.2	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Peak

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2355.128	Vertical	56.6	74.0	17.4	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Average

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2356.795	Vertical	49.9	54.0	4.1	Complied

Transmitter Band Edge Radiated Emissions (continued)**Results: Hopping Mode / 2DH5****Lower Band Edge****Upper Band Edge****2310 MHz to 2390 MHz Restricted Band**

Transmitter Band Edge Radiated Emissions (continued)**Results: Static Mode / 3DH5**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2399.599	Vertical	57.4	86.2*	28.8	Complied
2400.0	Vertical	54.4	86.2*	31.8	Complied
2483.5	Vertical	56.1	74.0	17.9	Complied

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	50.9	54.0	3.1	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Peak

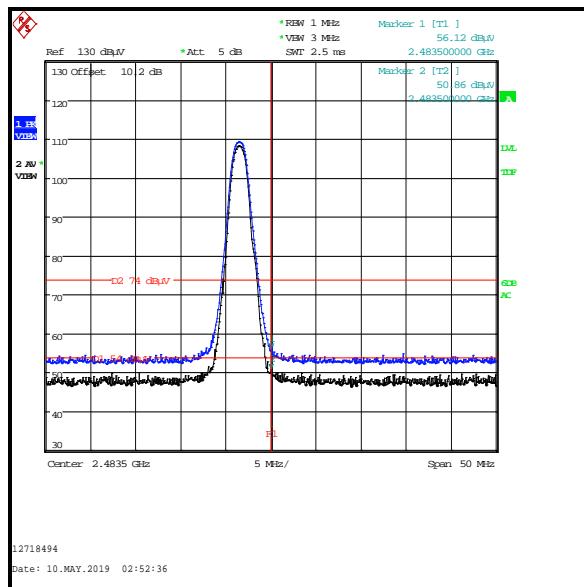
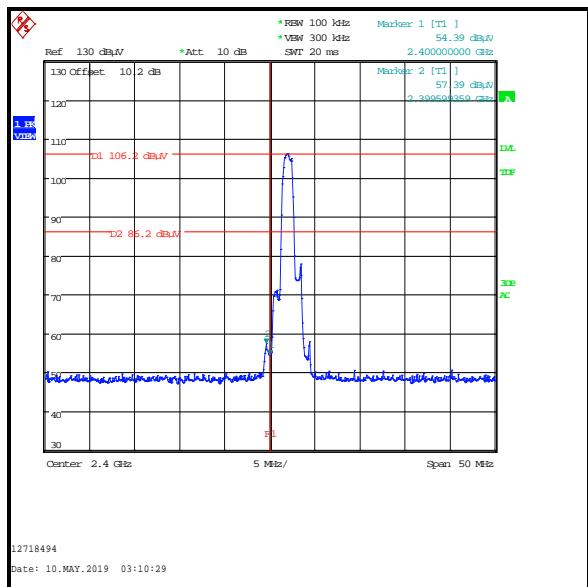
Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2340.641	Vertical	56.9	74.0	17.1	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Average

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2364.615	Vertical	49.8	54.0	4.2	Complied

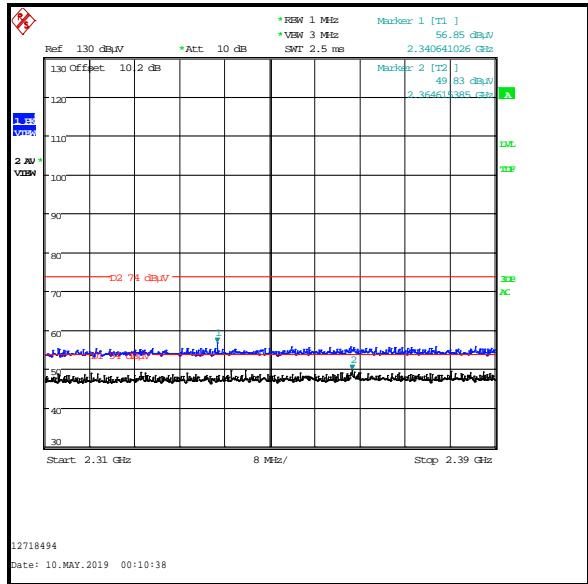
Transmitter Band Edge Radiated Emissions (continued)

Results: Static Mode / 3DH5



Lower Band Edge

Upper Band Edge



2310 MHz to 2390 MHz Restricted Band

Transmitter Band Edge Radiated Emissions (continued)**Results: Hopping Mode / 3DH5**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2399.519	Vertical	55.6	87.4*	31.8	Complied
2400.0	Vertical	52.7	87.4*	34.7	Complied
2483.5	Vertical	53.2	74.0	20.8	Complied
2502.330	Vertical	55.0	74.0	19.0	Complied

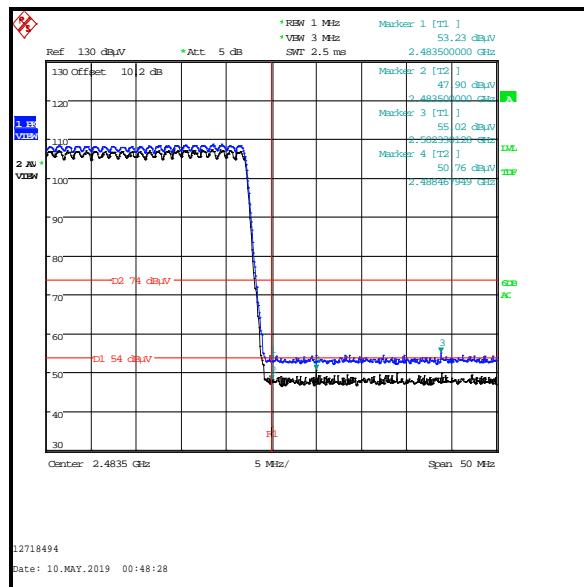
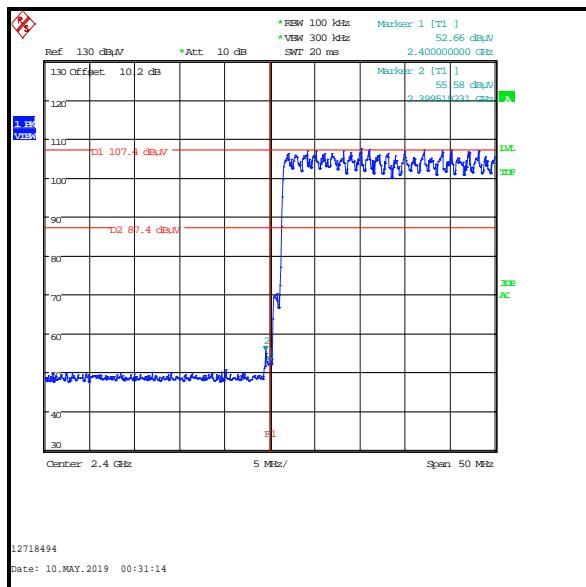
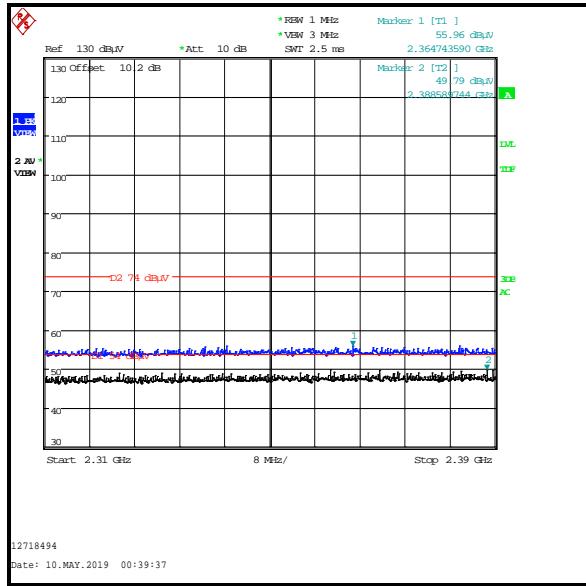
Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Vertical	47.9	54.0	6.1	Complied
2488.468	Vertical	50.8	54.0	3.2	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Peak

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2364.744	Vertical	56.0	74.0	18.0	Complied

Results: 2310 MHz to 2390 MHz Restricted Band / Average

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2388.590	Vertical	49.8	54.0	4.2	Complied

Transmitter Band Edge Radiated Emissions (continued)**Results: Hopping Mode / 3DH5****Lower Band Edge****Upper Band Edge****2310 MHz to 2390 MHz Restricted Band****--- END OF REPORT ---**