



TEST REPORT

Test Report No. : UL-RPT-RP12718494JD09A V2.0

Customer : Apple Inc.

Model No. : A1991

FCC ID : BCGA1991

Technology : WLAN

Test Standard(s) : FCC Parts 15.209(a) & 15.247

Test Laboratory : UL VS LTD, Basingstoke, Hampshire, RG24 8AH, United Kingdom

1. This test report shall not be reproduced except in full, without the written approval of UL VS LTD.
2. The results in this report apply only to the sample(s) tested.
3. The sample tested is in compliance with the above standard(s).
4. The test results in this report are traceable to the national or international standards.
5. Version 2.0 supersedes all previous versions.

Date of Issue: 17 September 2019

Checked by:

Sarah Williams
Senior Test Engineer, Radio Laboratory

Company Signatory:

Ben Mercer
Senior Test Engineer, Radio Laboratory
UL VS LTD



UL VS LTD

Unit 1-3 Horizon, Kingsland Business Park, Wade Road, Basingstoke, Hampshire, RG24 8AH, UK
Telephone: +44 (0)1256 312000
Facsimile: +44 (0)1256 312001

Customer Information

Company Name:	Apple Inc.
Address:	One Apple Park Way Cupertino, California 95014 U.S.A.
Contact Name:	Stuart Thomas

Report Revision History

Version Number	Issue Date	Revision Details	Revised By
1.0	16/07/2019	Initial Version	Sarah Williams
2.0	17/09/2019	Address TCB questions	Sarah Williams

Table of Contents

Customer Information	2
Report Revision History	2
1. Attestation of Test Results	4
1.1. Description of EUT	4
1.2. General Information	4
1.3. Summary of Test Results	4
1.4. Deviations from the Test Specification	5
2. Summary of Testing	6
2.1. Facilities and Accreditation	6
2.2. Methods and Procedures	6
2.3. Calibration and Uncertainty	7
2.4. Test and Measurement Equipment	8
3. Equipment Under Test (EUT)	12
3.1. Identification of Equipment Under Test (EUT)	12
3.2. Modifications Incorporated in the EUT	12
3.3. Additional Information Related to Testing	13
3.4. Description of Available Antennas	13
3.5. Description of Test Setup	14
4. Antenna Port Test Results	20
4.1. Transmitter Duty Cycle	20
4.2. Transmitter Minimum 6 dB Bandwidth	22
4.3. Transmitter Power Spectral Density	32
4.4. Transmitter Maximum (Average) Output Power	79
5. Radiated Test Results	128
5.1. Transmitter Radiated Emissions <1 GHz	128
5.2. Transmitter Radiated Emissions >1 GHz	130
5.3. Transmitter Band Edge Radiated Emissions	133
Appendix 1	162

1. Attestation of Test Results

1.1. Description of EUT

The Equipment Under Test (EUT) was a Desktop computer with *Bluetooth*, *Bluetooth* Low Energy and 802.11 a/b/g/n/ac capabilities in the 2.4 GHz and 5.0 GHz bands.

1.2. General Information

Specification Reference:	47CFR15.247
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) - Section 15.247
Specification Reference:	47CFR15.207 and 47CFR15.209
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) - Sections 15.207 and 15.209
Site Registration:	621311
Location of Testing:	UL VS LTD, Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, United Kingdom
Test Dates:	16 April 2019 to 31 May 2019

1.3. Summary of Test Results

FCC Reference (47CFR)	Measurement	Result
Part 15.35(c)	Transmitter Duty Cycle	Note 1
Part 15.247(a)(2)	Transmitter Minimum 6 dB Bandwidth	Complied
Part 15.247(e)	Transmitter Power Spectral Density	Complied
Part 15.247(b)(3)	Transmitter Maximum (Average) Output Power	Complied
Part 15.247(d) & 15.209(a)	Transmitter Radiated Emissions	Complied
Part 15.247(d) & 15.209(a)	Transmitter Band Edge Radiated Emissions	Complied

Note(s):

1. The measurement was performed to assist in the calculation of the level of maximum conducted output power, power spectral density and emissions. The EUT cannot transmit continuously and sweep triggering/signal gating cannot be implemented.
2. For the data rates declared as worst case and reported in this test report, duty cycle was measured to be greater than 98%. Plots for these measurements are archived on the UL VS LTD IT server and available for inspection upon request.
3. There are two vendors of the WiFi/*Bluetooth* radio modules, Vendor 1 and Vendor 2.

The WiFi/*Bluetooth* radio modules have the same mechanical outline (i.e. the same packaging dimension and pin layout), use the same on-board antenna matching circuit, have an identical antenna structure and are built and tested to conform to the same specification and to operate within the same tolerances.

Baseline testing was performed on the two vendors to determine the worst case.

1.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

2. Summary of Testing

2.1. Facilities and Accreditation

The test site and measurement facilities used to collect data are located at Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, United Kingdom. The following table identifies which facilities were utilised for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

Site 1	X
Site 2	-
Site 17	X

UL VS LTD is accredited by UKAS. The tests reported herein have been performed in accordance with its terms of accreditation.

2.2. Methods and Procedures

Reference:	ANSI C63.10-2013
Title:	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
Reference:	KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019
Title:	Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating Under Section 15.247 of the FCC Rules
Reference:	KDB 662911 D01 Multiple Transmitter Output v02r01 October 31, 2013
Title:	Emissions Testing of Transmitters with Multiple Outputs in the Same Band

2.3. Calibration and Uncertainty

Measuring Instrument Calibration

In accordance with UKAS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value measured (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
Duty Cycle	2.4 GHz to 2.4835 GHz	95%	$\pm 1.14 \%$
Minimum 6 dB Bandwidth	2.4 GHz to 2.4835 GHz	95%	$\pm 4.59 \%$
Spectral Power Density	2.4 GHz to 2.4835 GHz	95%	$\pm 1.13 \text{ dB}$
Conducted Maximum Output Power	2.4 GHz to 2.4835 GHz	95%	$\pm 1.13 \text{ dB}$
Radiated Spurious Emissions	30 MHz to 1 GHz	95%	$\pm 4.65 \text{ dB}$
Radiated Spurious Emissions	1 GHz to 25 GHz	95%	$\pm 2.94 \text{ dB}$

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

2.4. Test and Measurement Equipment

Test Equipment Used for Transmitter Conducted Tests

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2004	Thermohygrometer	Testo	608-H1	45046425	06 Jan 2020	12
M2033	Signal Analyser	Rohde & Schwarz	FSV13	101667	29 Jan 2020	12
M2024	Power Sensor	Boonton	55006	9824	11 Jan 2020	12
M2025	Power Sensor	Boonton	55006	9869	14 Jan 2020	12
M2027	Power Sensor	Boonton	55006	9812	11 Jan 2020	12
A3027	Attenuator	Broadwave Technologies Inc.	351-311-006	#1	Calibrated before use	-
A3028	Attenuator	Broadwave Technologies Inc.	351-311-006	#2	Calibrated before use	-
A3029	Attenuator	Broadwave Technologies Inc.	351-311-006	#3	Calibrated before use	-
A3004	RF Switch	Pickering Interfaces	64-102-002	XZ363230	Calibrated before use	-
A3180	Attenuator	Pasternack	PE7047-3	Not stated	Calibrated before use	-
G0615	Signal Generator	Rohde & Schwarz	SMBV100A	260473	08 May 2020	36
A3005	Replay Test Rack	N/A	N/A	N/A	Calibration not required	-

Test Measurement Software/Firmware Used for Transmitter Conducted Tests

Name	Version	Release Date
UL VS LTD Replay	20190208	08 February 2019

Test and Measurement Equipment (continued)**Test Equipment Used for Transmitter Conducted Tests (TXBF)**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2001	Thermohygrometer	Testo	608-H1	40541824	06 Jan 2020	12
M2036	Signal Analyser	Rohde & Schwarz	FSV30	101791	07 May 2020	12
A3160	RF Switch	Pickering Interface	60-102B-001	XZ370188	Calibrated before use	-
M2056	Power Sensor	Boonton	55006	10232	03 May 2020	12
M2057	Power Sensor	Boonton	55006	10232	03 May 2020	12
M2060	Power Sensor	Boonton	55006	10864	18 Apr 2020	12
G0615	Vector Signal Generator	Rohde & Schwarz	SMBV100A	260473	08 May 2020	36
A163	Attenuator	Narda	743-8-	01344	Calibrated before use	-
A3177	Power Splitter	Mini-Circuits	ZN4PD1-63HP-S+	UU40901834#1	Calibrated before use	-
A2098	Power Splitter	Mini-Circuits	ZN4PD1-63HP-S+	SF210501205	Calibrated before use	-
A2505	Directional Coupler	AtlanTechRF	CDC-003060-20	1101230	Calibrated before use	-
A2536	Directional Coupler	AtlanTechRF	CDC-003060-20	14041701720	Calibrated before use	-
A2534	Directional Coupler	AtlanTechRF	CDC-003060-20	14041701718	Calibrated before use	-

Test Measurement Software/Firmware Used

Name	Version	Release Date
UL VS LTD Replay	20190208	08 February 2019

Test and Measurement Equipment (continued)**Test Equipment Used for Transmitter Radiated Emissions**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2003	Thermohygrometer	Testo	608-H1	45046641	06 Jan 2020	12
K0017	3m RSE Chamber	Rainford EMC	N/A	N/A	16 Feb 2020	12
M1630	Test Receiver	Rohde & Schwarz	ESU40	100233	20 Sep 2019	12
A2863	Pre Amplifier	Agilent	8449B	3008A02100	12 Feb 2020	12
A2893	Pre Amplifier	Schwarzbeck	BBV 9721	9721-021	15 Feb 2020	12
A2892	Antenna	Schwarzbeck	BBHA 9170	9170-727	16 Feb 2020	12
A2889	Antenna	Schwarzbeck	BBHA 9120 B	BBHA 9120 B653	12 Feb 2020	12
A2890	Antenna	Schwarzbeck	HWRD 750	014	12 Feb 2020	12
A2914	High Pass Filter	AtlanTecRF	AFH-03000	2155	20 Feb 2020	12
A2916	Attenuator	AtlanTecRF	AN18W5-10	832827#1	20 Feb 2020	12
A3014	High Pass Filter	AtlanTecRF	AFH-06000	17042400007	20 Feb 2020	12
A3095	High Pass Filter	AtlanTecRF	AFH-07000	18051600012	09 Apr 2020	12
K0001	5m RSE Chamber	Rainford EMC	N/A	N/A	04 Oct 2019	12
M2044	Test Receiver	Rohde & Schwarz	ESU26	100122	01 Apr 2020	12
A3154	Pre Amplifier	Com-Power	PAM-103	18020012	14 Sep 2019	12
M2040	Thermohygrometer	Testo	608-H1	45124934	06 Jan 2020	12
A553	Antenna	Chase	CBL6111A	1593	08 Oct 2019	12
A3083	Low Pass Filter	AtlanTecRF	AFL-01000	18010900076	09 Apr 2020	12

Test and Measurement Equipment (continued)**Test Equipment Used for Transmitter Band Edge Radiated Emissions**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2003	Thermohygrometer	Testo	608-H1	45046641	06 Jan 2020	12
K0017	3m RSE Chamber	Rainford EMC	N/A	N/A	16 Feb 2020	12
M1630	Test Receiver	Rohde & Schwarz	ESU40	100233	20 Sep 2019	12
A2863	Pre Amplifier	Agilent	8449B	3008A02100	12 Feb 2020	12
A2916	Attenuator	AtlanTecRF	AN18W5-10	832827#1	20 Feb 2020	12
A2889	Antenna	Schwarzbeck	BBHA 9120 B	BBHA 9120 B 653	12 Feb 2020	12
M2040	Thermohygrometer	Testo	608-H1	45124934	06 Jan 2020	12
K0001	5m RSE Chamber	Rainford EMC	N/A	N/A	04 Oct 2019	12
M2044	Test Receiver	Rohde & Schwarz	ESU26	100122	01 Apr 2020	12
A3179	Pre-Amplifier	Hewlett Packard	8449B	3008A00934	04 Apr 2020	12
A3138	Antenna	Schwarzbeck	BBHA 9120 B	00702	03 Oct 2019	12
A2523	Attenuator	AtlanTecRF	AN18W5-10	832827#1	04 Mar 2020	12

Test Measurement Software/Firmware Used

Name	Version	Release Date
UL VS LTD Replay	1	29 November 2018

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	Apple
Model Name or Number:	A1991
Test Sample Serial Number:	C02YD003MFLQ <i>(Conducted sample #1)</i>
Hardware Version:	REV 1.0
Software Version:	18F98
FCC ID:	BCGA1991

Brand Name:	Apple
Model Name or Number:	A1991
Test Sample Serial Number:	C02YF007MFLF <i>(Conducted sample #2)</i>
Hardware Version:	REV 1.0
Software Version:	18F98
FCC ID:	BCGA1991

Brand Name:	Apple
Model Name or Number:	A1991
Test Sample Serial Number:	C02YF000CMFLF <i>(Radiated sample #1)</i>
Hardware Version:	REV 1.0
Software Version:	18F98
FCC ID:	BCGA1991

Brand Name:	Apple
Model Name or Number:	A1991
Test Sample Serial Number:	C02YD006MFLQ <i>(Radiated sample #2)</i>
Hardware Version:	REV 1.0
Software Version:	18F98
FCC ID:	BCGA1991

3.2. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.3. Additional Information Related to Testing

Technology Tested:	WLAN (IEEE 802.11b,g,n) / Digital Transmission System	
Type of Unit:	Transceiver	
Modulation Type:	DBPSK, DQPSK, BPSK, QPSK, 16QAM & 64QAM	
Data Rates:	802.11b	1, 2, 5.5 & 11 Mbps (SISO, MIMO with CDD)
	802.11g	6, 9, 12, 18, 24, 36, 48 & 54 Mbps (SISO, MIMO with CDD)
	802.11n HT20	MCS0 to MCS7 (1 spatial stream with either SISO or 2/3-chain MIMO CDD/TxBF operation) MCS8 to MCS15 (2 spatial streams on 2 transmit chains with or without TxBF) MCS16 to MCS23 (3 spatial streams on 3 transmit chains with or without TxBF)
Power Supply Requirement(s):	Nominal	Constant 3.8 VDC via 120 VAC 60 Hz AC/DC supply
Maximum Conducted Output Power:	27.0 dBm	
Channel Spacing:	20 MHz	
Transmit Frequency Range:	2412 MHz to 2472 MHz	
Transmit Channels Tested:	Channel Number	Channel Frequency (MHz)
	1	2412
	2	2417
	3	2422
	6	2437
	7	2442
	11	2462
	12	2467
	13	2472

3.4. Description of Available Antennas

The radio utilizes three integrated antennas, with the following maximum gains:

Frequency Band (MHz)	G _{Antenna 1 / Core 0} (dBi)	G _{Antenna 2 / Core 1} (dBi)	G _{Antenna 3 / Core 2} (dBi)
2400 -2480	4.6	4.3	4.5

Refer to Appendix 1 for directional antenna gain calculations for MIMO modes.

3.5. Description of Test Setup

Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	Test Laptop
Brand Name:	Apple
Model Name or Number:	MacBook Pro
Serial Number:	C02Q81PFG3QD

Description:	USB Keyboard
Brand Name:	Apple
Model Name or Number:	A1243
Serial Number:	C02T300BHXOX

Description:	USB Mouse
Brand Name:	Apple
Model Name or Number:	A1152
Serial Number:	Not marked or stated

Description:	Personal Hands Free (PHF)
Brand Name:	Apple
Model Name or Number:	Apple EarPods
Serial Number:	Not marked or stated

Description:	USB-C to USB Adapter. Quantity 4
Brand Name:	Apple
Model Name or Number:	A1632
Serial Number:	Not marked or stated

Description:	HDMI Monitor
Brand Name:	Dell
Model Name or Number:	S2218H
Serial Number:	Not marked or stated

Description:	USB Hub
Brand Name:	Hama
Model Name or Number:	0078498
Serial Number:	09825891600

Support Equipment (continued)

Description:	Ethernet Router
Brand Name:	Netgear
Model Name or Number:	GS605v3
Serial Number:	1YG194390218E

Description:	Ethernet Cable. Length 3.0 metres. Quantity 2
Brand Name:	Not marked or stated
Model Name or Number:	Not marked or stated
Serial Number:	Not marked or stated

Description:	HDMI Cable. Length 3.0 metres. Quantity 2
Brand Name:	Not marked or stated
Model Name or Number:	Not marked or stated
Serial Number:	Not marked or stated

Description:	USB Cable. Length 3.0 metres. Quantity 3
Brand Name:	Not marked or stated
Model Name or Number:	Not marked or stated
Serial Number:	Not marked or stated

Description:	Test Laptop
Brand Name:	Apple
Model Name or Number:	MacBook Pro
Serial Number:	C02VT0AUHX87

Description:	HDMI Hub
Brand Name:	Not marked or stated
Model Name or Number:	Not marked or stated
Serial Number:	Not marked or stated

Brand Name:	Test Laptop
Description:	Apple
Model Name or Number:	MacBook Pro
Serial Number:	C02S200CHH5Q

Operating Modes



The EUT was tested in the following operating mode(s):

- Non-TxBF modes: Continuously transmitting with a modulated carrier at maximum power on the relevant channels as required using the supported data rates/modulation types.
- TxBF modes: Transmitting a modulated carrier with maximum possible duty cycle at maximum power on the relevant channels as required using the supported data rates/modulation types.

Configuration and Peripherals

The EUT was tested in the following configuration(s):


- Controlled in test mode using a software application on the EUT supplied by the customer. The application was used to enable a continuous transmission and to select the test channels as required.
- For TxBF modes, the EUT was communicating via a conducted RF link with an equivalent device. The EUT ran iPerf bandwidth testing application in client mode to produce maximum throughput. The customer supplied a document containing the setup instructions 'EUT_Txbf_operating_procedures_v1.pdf'.
- The customer declared the following data rates to be used for all measurements as:
 - 802.11b / SISO – DBPSK / 1 Mbps
 - 802.11g / SISO – BPSK / 6 Mbps
 - 802.11n HT20 / SISO – BPSK / MCS0
 - 802.11b / MIMO 2Tx CDD – DBPSK / 1 Mbps
 - 802.11b / MIMO 3Tx CDD – DBPSK / 1 Mbps
 - 802.11n HT20 / MIMO / 2Tx CDD – BPSK / MCS0
 - 802.11n HT20 / MIMO / 3Tx CDD – BPSK / MCS0
 - 802.11n HT20 / MIMO / 2Tx TXBF – BPSK / MCS0
 - 802.11n HT20 / MIMO / 3Tx TXBF – BPSK / MCS0
- The EUT has three separate antennas which correspond to three separate antenna ports. Core 0, Core 1 and Core 2 correspond to antenna 1, antenna 2 and antenna 3 respectively.
- For the Transmitter Minimum 6 dB Bandwidth test, only SISO modes were tested since the bandwidth does not change depending on chains used.
- The customer supplied U.FL RF cables with the EUT in order to perform conducted measurements. The measured additional path loss was included in any path loss calculations.
- Transmitter spurious emissions were performed with the EUT transmitting with a data rate of 802.11b / MIMO / 3Tx CDD / 1 Mbps. This was found to be the worst case modulation scheme with regards to emissions after preliminary investigations and, as this mode emits the highest output power level, it was deemed to be the worst case.
- Transmitter radiated spurious emissions tests were performed with the USB Keyboard, USB Mouse and PHF connected to the EUT. The remaining USB ports were connected with a USB cable to a hub. The USB-C ports were connected via a USB C-A adaptor and USB cable to a hub. The ethernet ports were terminated into a router. The HDMI ports were terminated into a hub. The router and hubs were placed under the floor inside the chamber.
- The EUT was powered from a 120 VAC 60 Hz single phase mains supply.

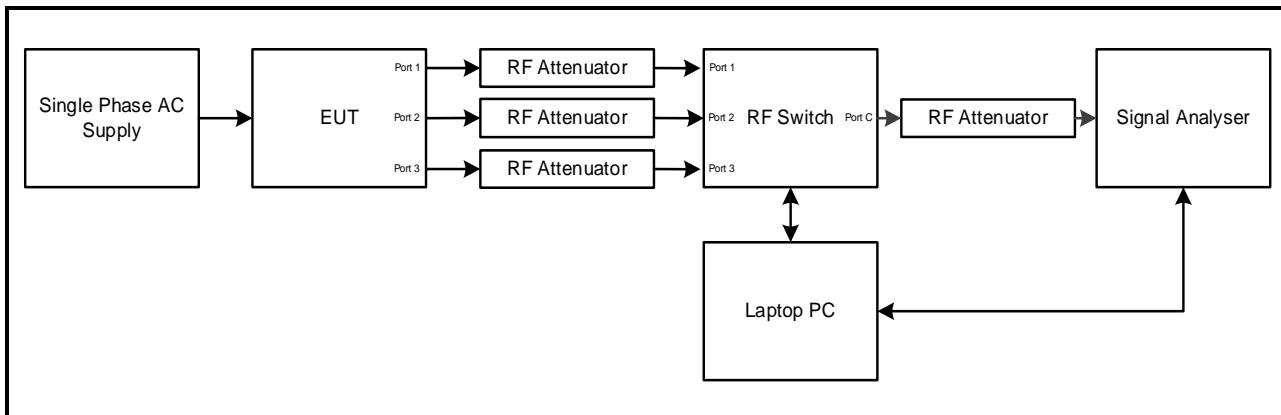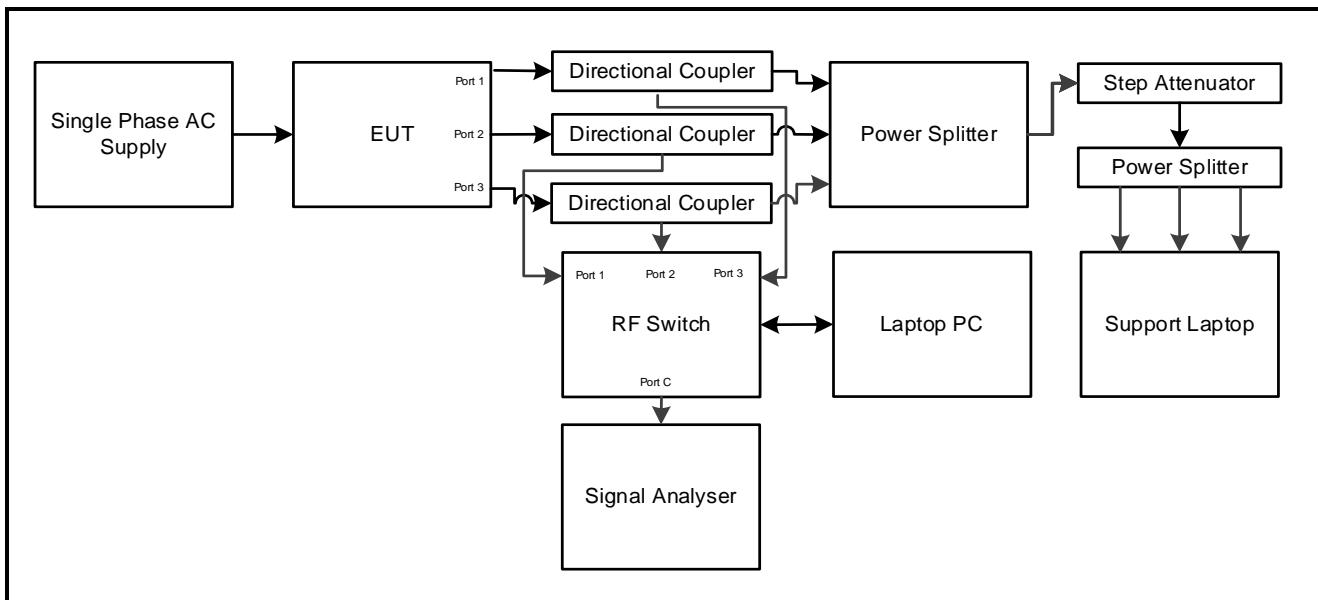
Test Setup Diagrams**Conducted Tests:****Test Setup for Transmitter Conducted Tests (non-TXBF)****Test Setup for Transmitter Conducted Tests (TXBF)**

Test Setup Diagrams

Radiated Tests:

Test Setup for Transmitter Radiated Emissions

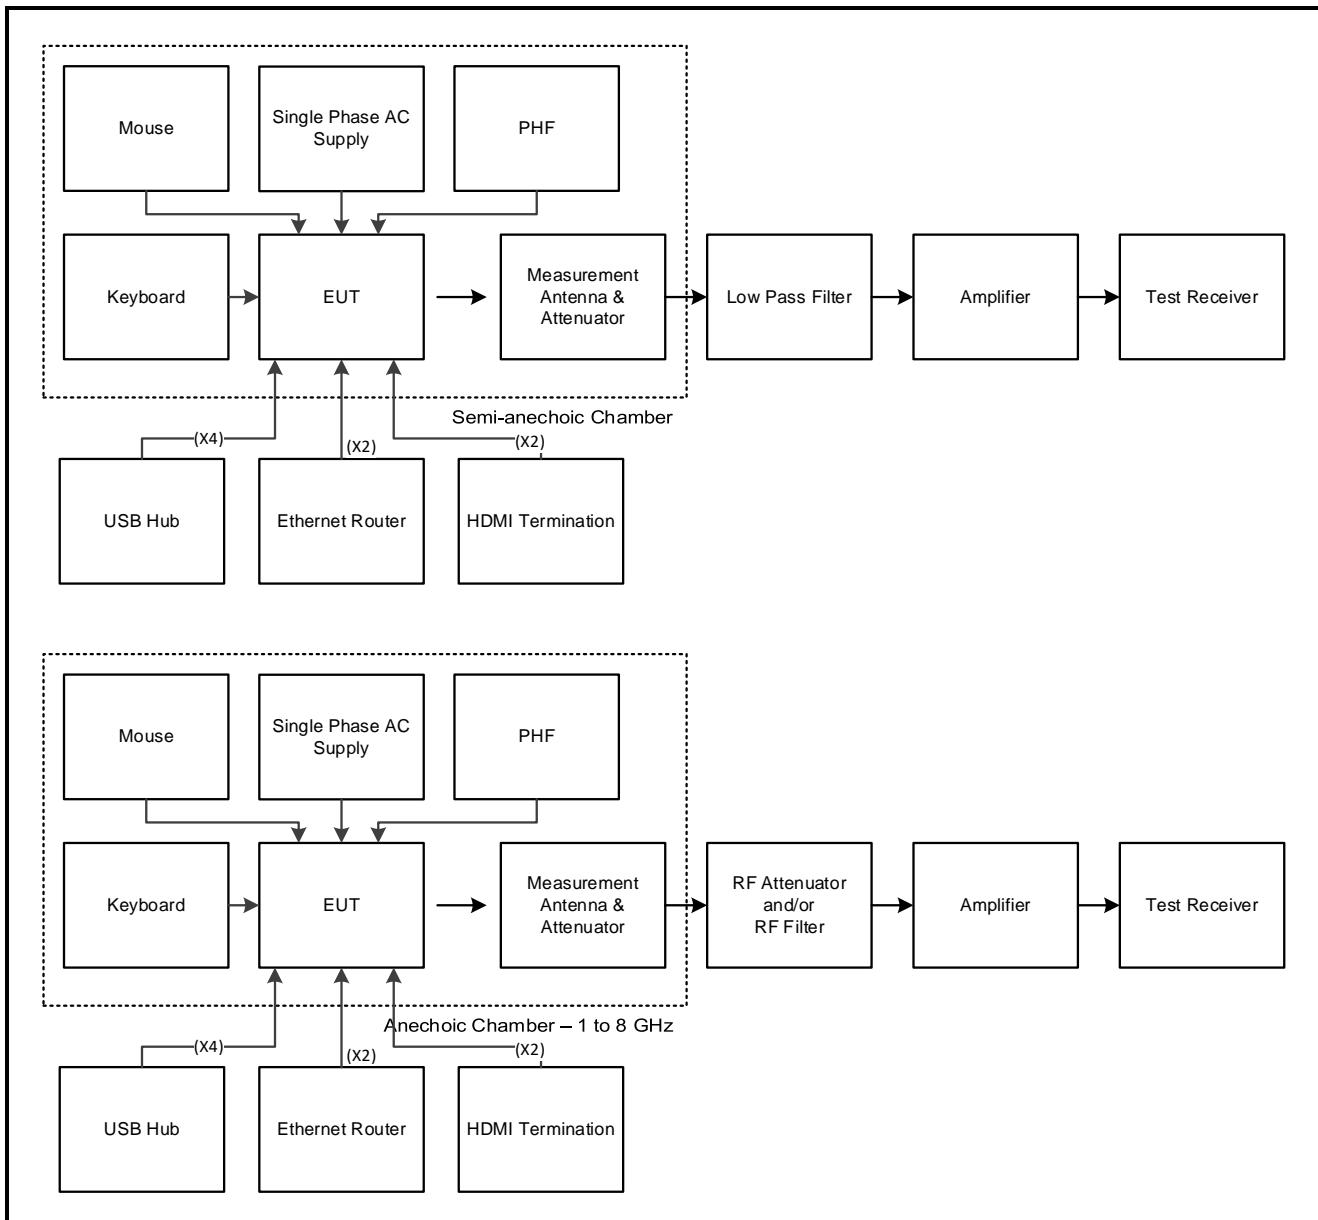

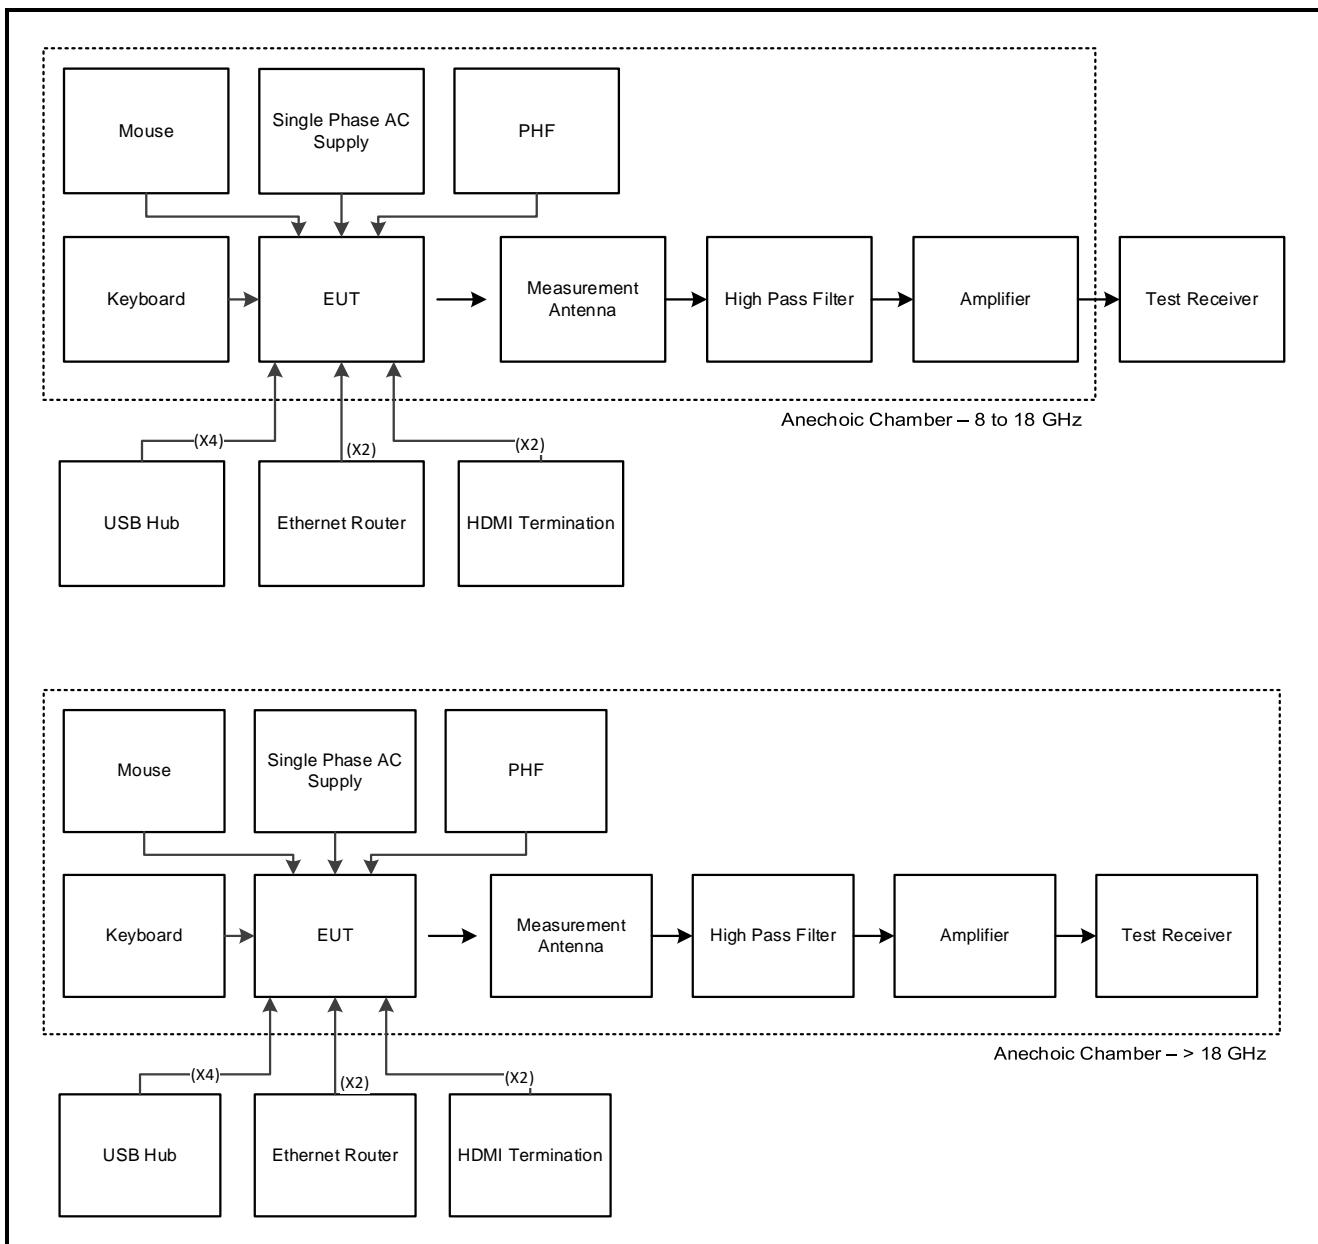Test Setup Diagrams (continued)**Test Setup for Transmitter Radiated Emissions (continued)**

4. Antenna Port Test Results

4.1. Transmitter Duty Cycle

Test Summary:

Test Engineers:	Victor Carmon & Matthew Botfield	Test Date:	25 May 2019
Test Sample Serial Number:	C02YD003MFLQ		

FCC Reference:	Part 15.35(c)
Test Method Used:	FCC KDB 558074 Section 6 referencing ANSI C63.10 Section 11.6

Environmental Conditions:

Temperature (°C):	21
Relative Humidity (%):	42

Note(s):

1. In order to assist with the determination of the average level of fundamental and spurious emissions field strength, measurements were made of duty cycle to determine the transmission duration and the silent period time of the transmitter. The transmitter duty cycle was measured using a signal analyser in the time domain and calculated by using the following calculation:


$$10 \log 1 / (\text{On Time} / [\text{Period or } 100\text{ms whichever is the lesser}]).$$

$$802.11n / \text{HT20} / \text{MCS0} / \text{MIMO} / 2\text{Tx TxBF} / \text{Core 0 duty cycle: } 10 \log (1 / (4.79/4.91)) = 0.1 \text{ dB}$$
$$802.11n / \text{HT20} / \text{MCS0} / \text{MIMO} / 3\text{Tx TxBF} / \text{Core 0 duty cycle: } 10 \log (1 / (3.83/3.95)) = 0.1 \text{ dB}$$


2. For all other modes, the duty cycle was measured and found to be greater than 98%. Plots for these measurements are archived on the UL VS LTD IT server and available for inspection upon request.

Transmitter Duty Cycle (continued)**Results: 802.11n / HT20 / MIMO / 2Tx TxBF / MCS0 / Core 0**

Pulse Duration (ms)	Period (ms)	Duty Cycle (dB)
4.79	4.91	0.1

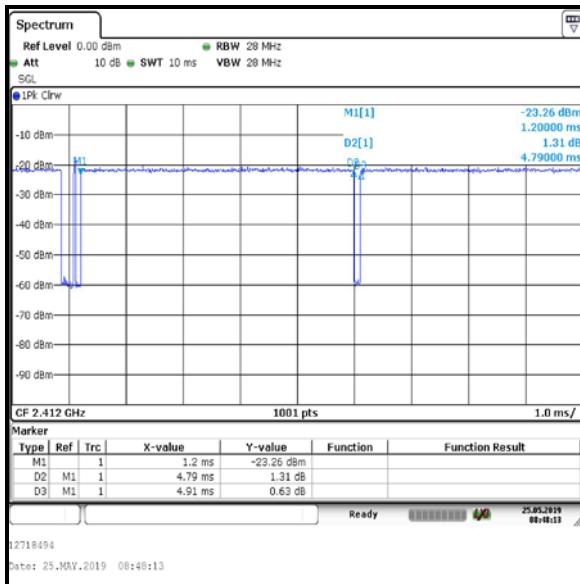**Results: 802.11n / HT20 / MIMO / 3Tx TxBF / MCS0 / Core 0**

Pulse Duration (ms)	Period (ms)	Duty Cycle (dB)
3.83	3.95	0.1

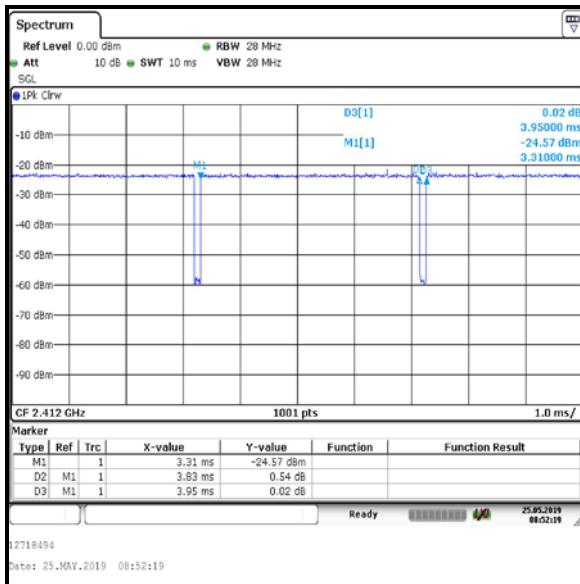

4.2. Transmitter Minimum 6 dB Bandwidth

Test Summary:

Test Engineer:	Max Passell	Test Date:	24 May 2019
Test Sample Serial Numbers:	C02YF007MFLF		

FCC Reference:	Part 15.247(a)(2)
Test Method Used:	FCC KDB 558074 Section 8.2 referencing ANSI C63.10 Section 11.8.1

Environmental Conditions:


Temperature (°C):	22
Relative Humidity (%):	45

Note(s):


1. The customer declared the following data rates to be used for all measurements as:
 - o 802.11b – DBPSK / 1 Mbps / Core 0
 - o 802.11g – BPSK / 6 Mbps / Core 0
 - o 802.11n HT20 – BPSK / MCS0 / Core 0Only SISO modes are reported since the bandwidth does not change depending on chains used.
2. Final measurements were performed using the above configurations on the relevant channels in accordance with ANSI C63.10 Section 11.8.1 Option 1 measurement procedure. The signal analyser resolution bandwidth was set to 100 kHz and video bandwidth 300 kHz. A peak detector was used, sweep time was set to auto and the trace mode was Max Hold. The span was set to 40 MHz. The DTS bandwidth was measured at 6 dB down from the peak of the signal.
3. The signal analyser was connected to the RF port on the EUT using an RF switch, suitable attenuation and RF cables. An RF offset was entered on the signal analyser to compensate for the loss of the switch, attenuator and RF cables.

Transmitter Minimum 6 dB Bandwidth (continued)**Results: 802.11b / 20 MHz / DBPSK / 1 Mbps / Core 0**


Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
1	8162	≥500	7662	Complied
2	8220	≥500	7720	Complied
3	8220	≥500	7720	Complied
6	8683	≥500	8183	Complied
7	8683	≥500	8183	Complied
11	8220	≥500	7720	Complied
12	8220	≥500	7720	Complied
13	8162	≥500	7662	Complied

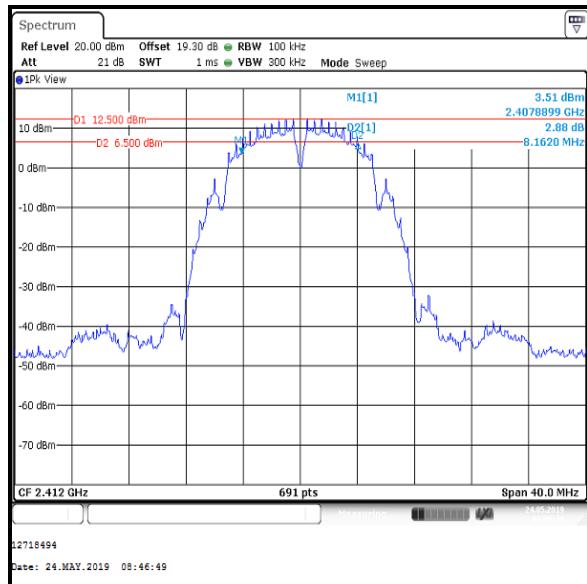Transmitter Minimum 6 dB Bandwidth (continued)**Results: 802.11b / 20 MHz / DBPSK / 1 Mbps / Core 0**


Channel 1

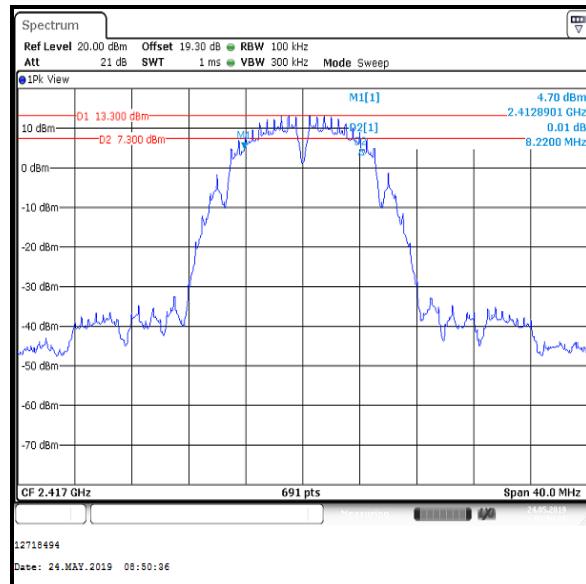


Channel 2

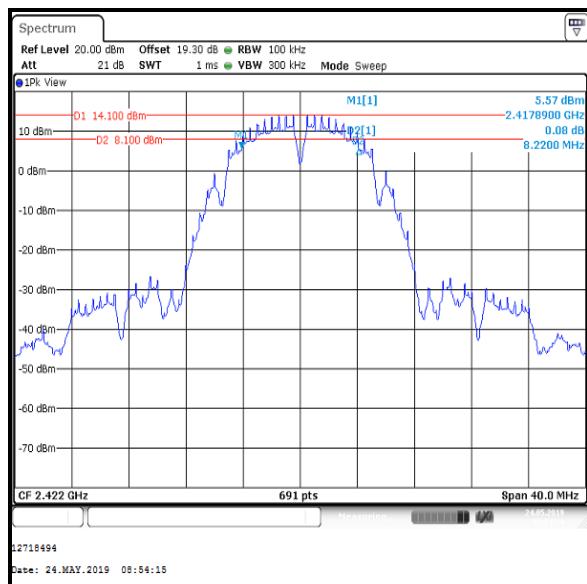


Channel 3

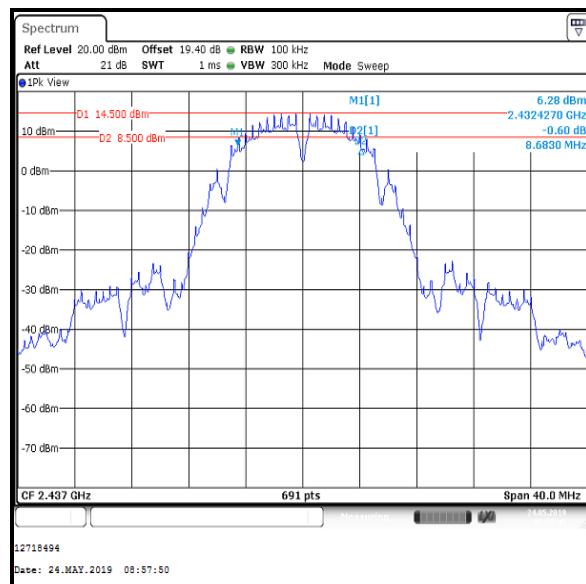


Channel 6

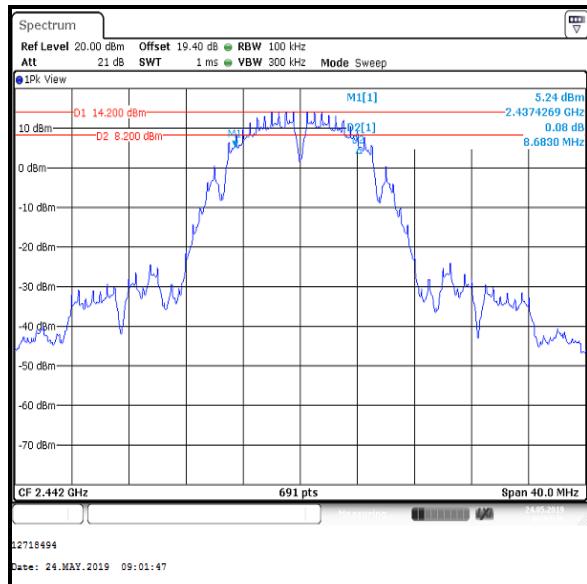Transmitter Minimum 6 dB Bandwidth (continued)**Results: 802.11b / 20 MHz / DBPSK / 1 Mbps / Core 0**


Channel 7

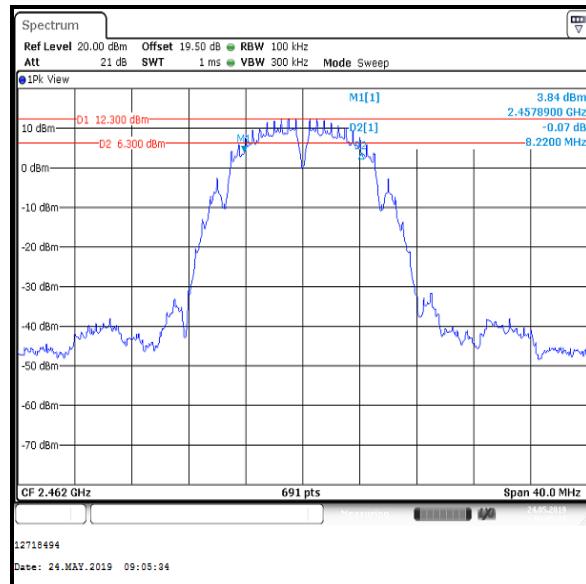

Channel 11

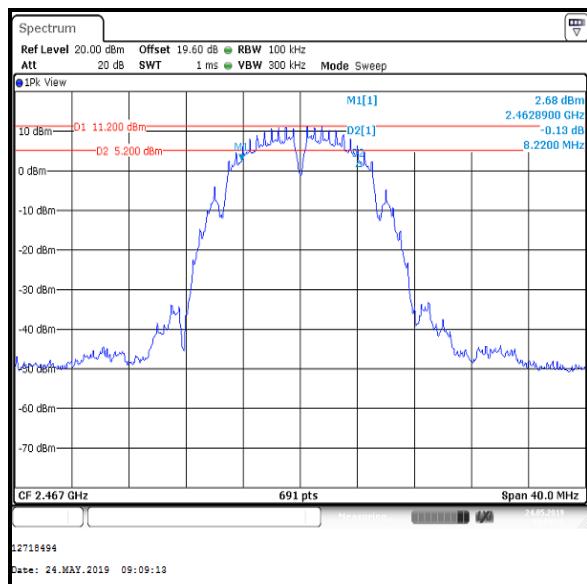




Channel 12

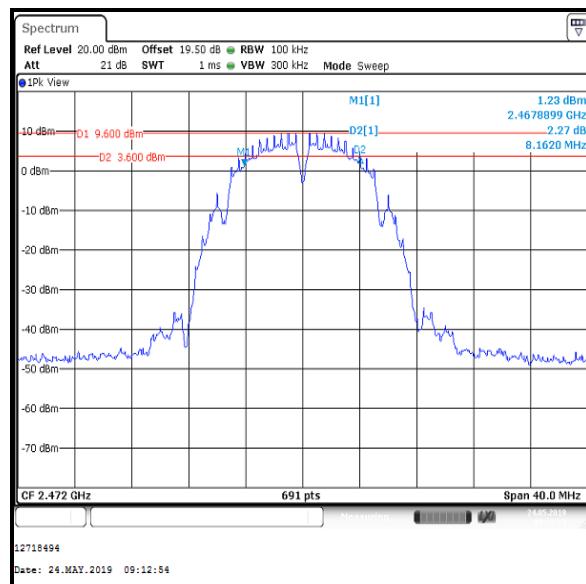


Channel 13


Transmitter Minimum 6 dB Bandwidth (continued)**Results: 802.11g / 20 MHz / BPSK / 6 Mbps / Core 0**

Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
1	15166	≥500	14666	Complied
2	15166	≥500	14666	Complied
3	15166	≥500	14666	Complied
6	15224	≥500	14724	Complied
7	15166	≥500	14666	Complied
11	15166	≥500	14666	Complied
12	15224	≥500	14724	Complied
13	15166	≥500	14666	Complied

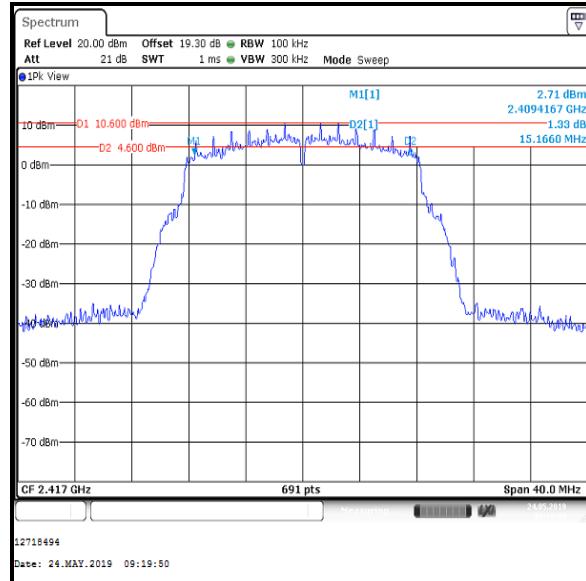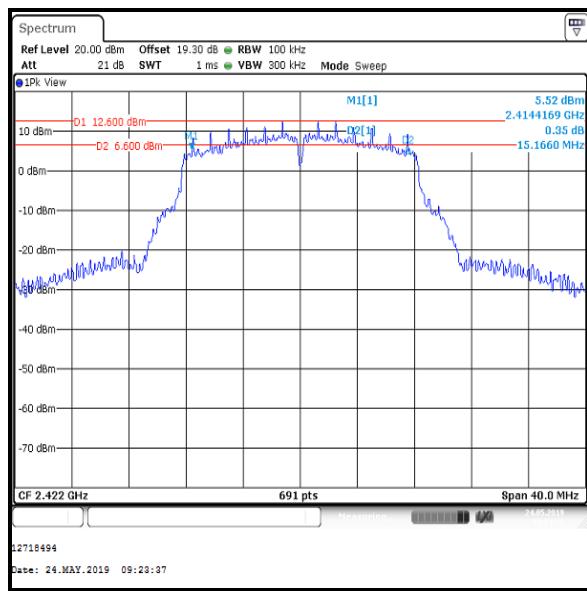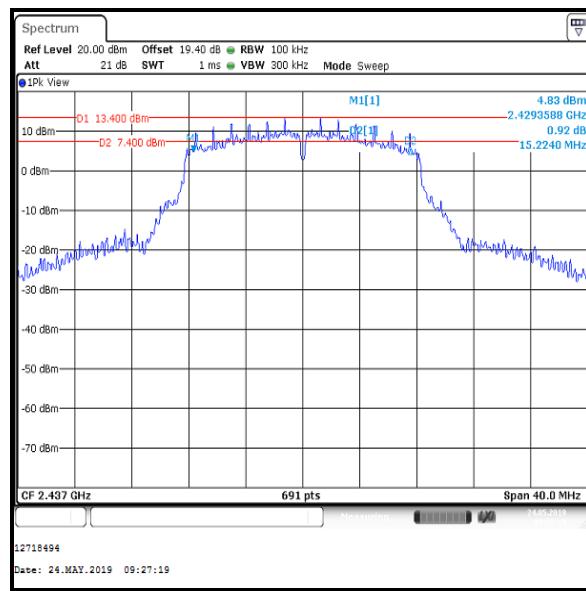
Transmitter Minimum 6 dB Bandwidth (continued)**Results: 802.11g / 20 MHz / BPSK / 6 Mbps / Core 0****Channel 1****Channel 2****Channel 3****Channel 6**

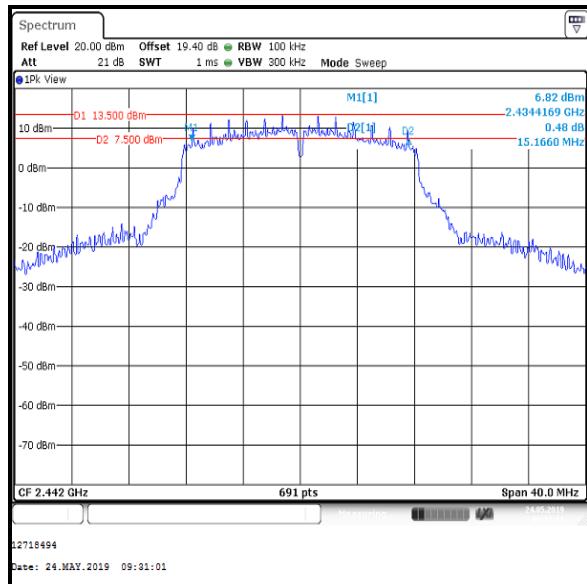Transmitter Minimum 6 dB Bandwidth (continued)**Results: 802.11g / 20 MHz / BPSK / 6 Mbps / Core 0**


Channel 7

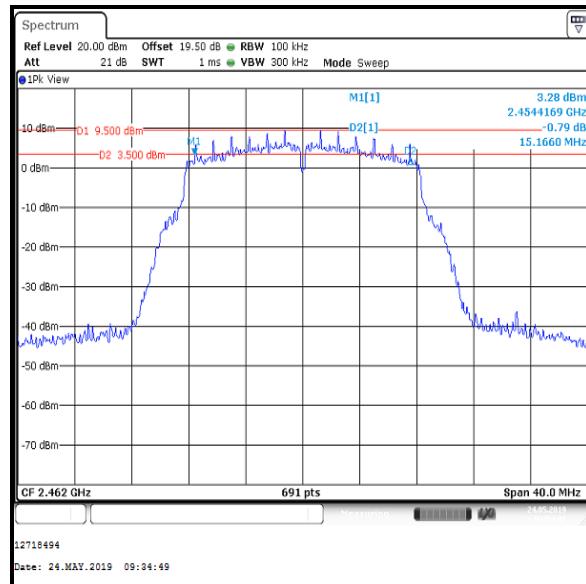

Channel 11

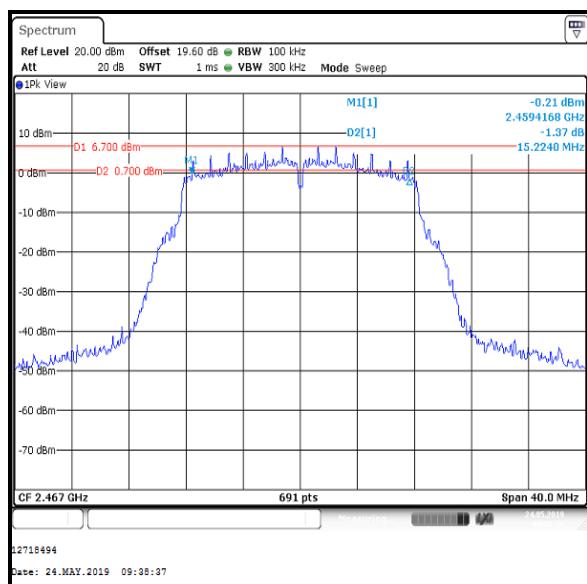


Channel 12

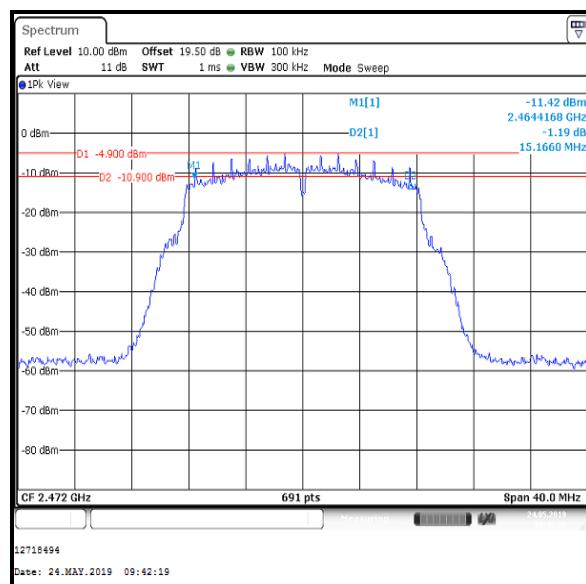


Channel 13

Transmitter Minimum 6 dB Bandwidth (continued)**Results: 802.11n / HT20 / SISO / BPSK / MCS0 / Core 0**


Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
1	15224	≥500	14724	Complied
2	15166	≥500	14666	Complied
3	15166	≥500	14666	Complied
6	15224	≥500	14724	Complied
7	15166	≥500	14666	Complied
11	15166	≥500	14666	Complied
12	15166	≥500	14666	Complied
13	15166	≥500	14666	Complied

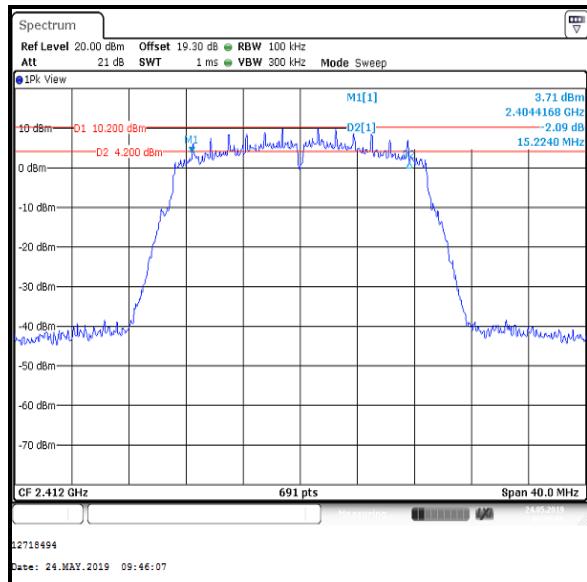Transmitter Minimum 6 dB Bandwidth (continued)**Results: 802.11n / HT20 / SISO / BPSK / MCS0 / Core 0**


Channel 1

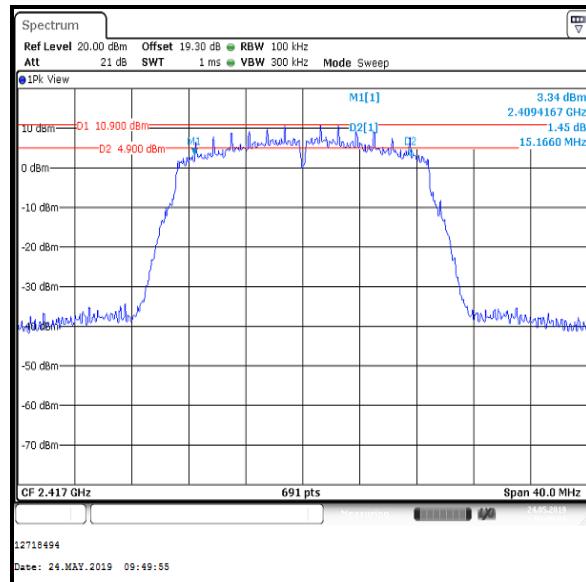


Channel 2

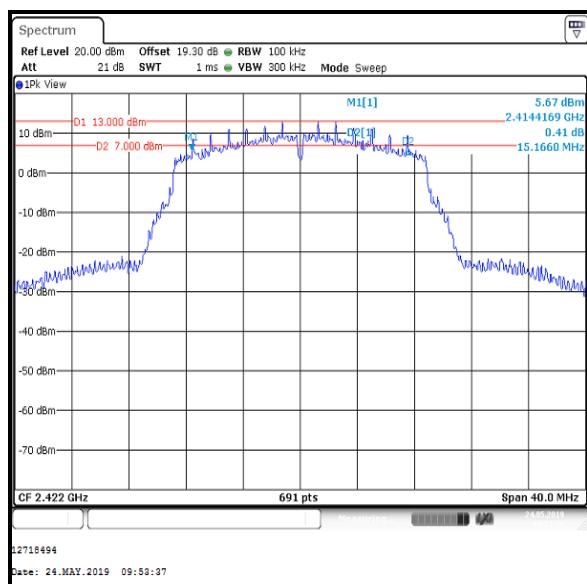


Channel 3

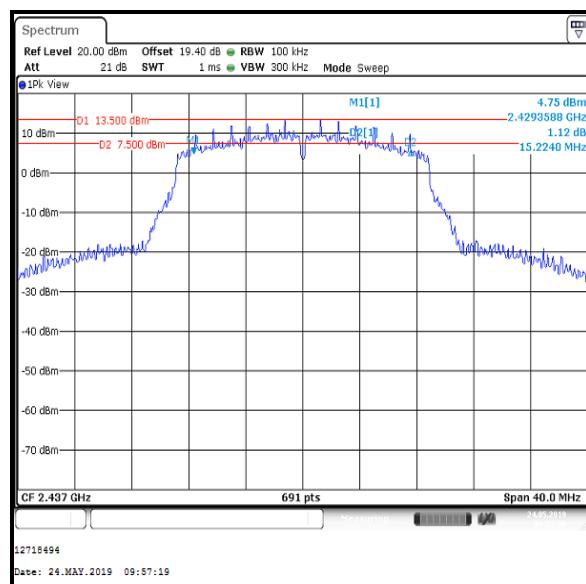


Channel 6

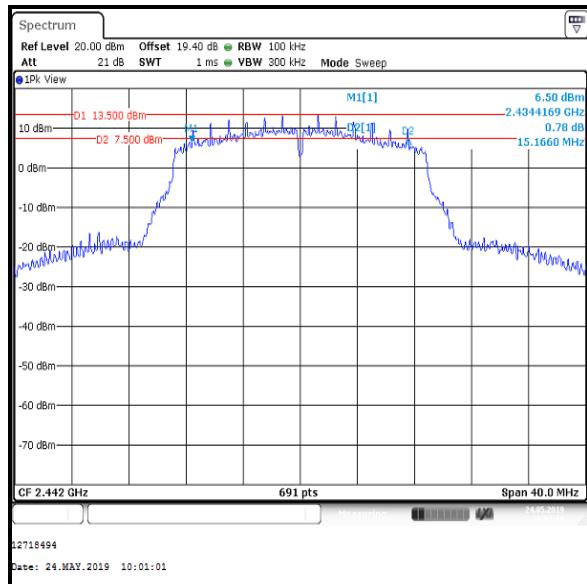Transmitter Minimum 6 dB Bandwidth (continued)**Results: 802.11n / HT20 / SISO / BPSK / MCS0 / Core 0**


Channel 7

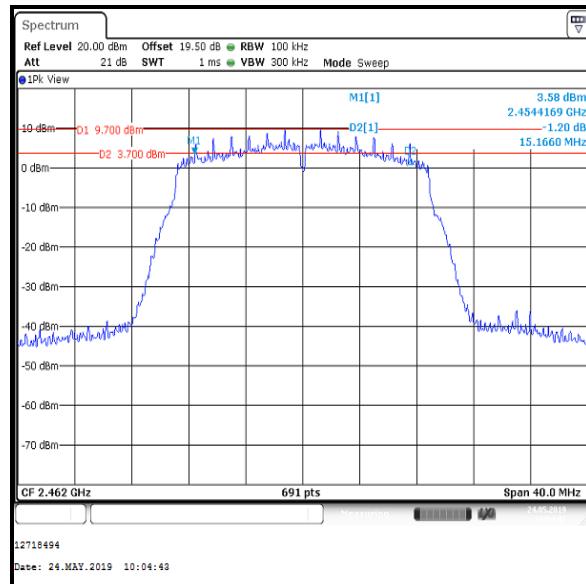

Channel 11

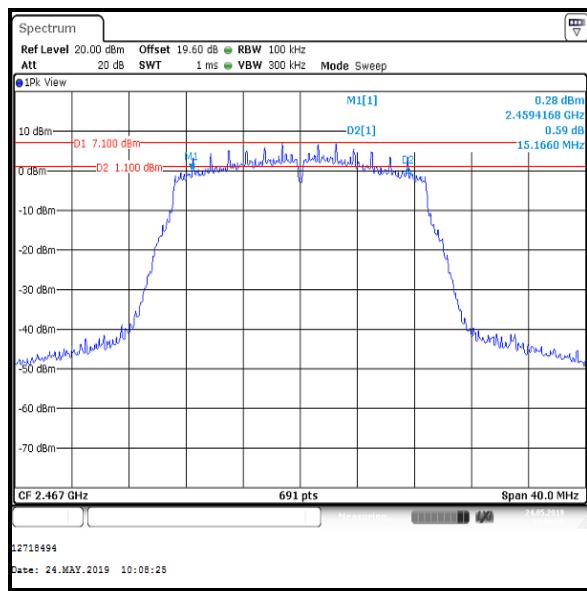

Channel 12

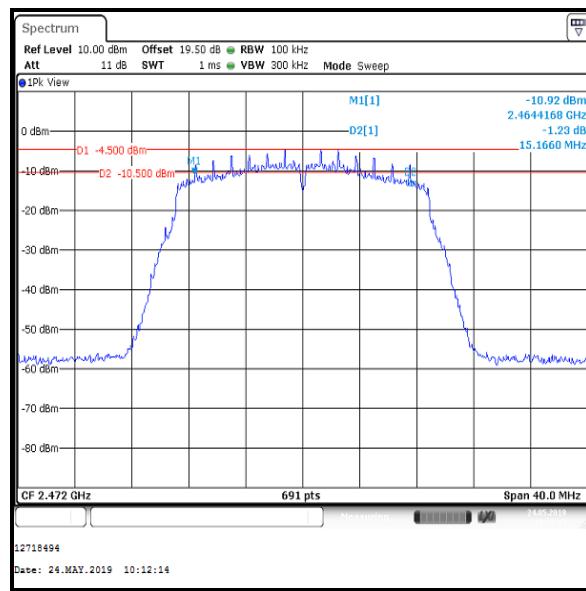

Channel 13

4.3. Transmitter Power Spectral Density

Test Summary:

Test Engineers:	Max Passell, Victor Carmon & Matthew Botfield	Test Dates:	24 May 2019 to 31 May 2019
Test Sample Serial Numbers:	C02YF007MFLF & C02YD003MFLQ		

FCC Reference:	Part 15.247(e)
Test Method Used:	FCC KDB 558074 Section 8.4 referencing ANSI C63.10 Sections 11.10.3 & 11.10.5

Environmental Conditions:


Temperature (°C):	20 to 22
Relative Humidity (%):	45 to 62

Transmitter Power Spectral Density (continued)**Note(s):**


1. The customer declared the following data rates to be used for all measurements as:
 - o 802.11b / DBPSK / 1 Mbps / SISO / Core 0
 - o 802.11g / BPSK / 6 Mbps / SISO / Core 0
 - o 802.11n HT20 / BPSK / MCS0 / SISO / Core 0
 - o 802.11b / DBPSK / 1 Mbps / MIMO / 2Tx CDD / Core 0 & Core 2
 - o 802.11b / DBPSK / 1 Mbps / MIMO / 3Tx CDD / Core 0, Core 1 & Core 2
 - o 802.11n HT20 / BPSK / MCS0 / MIMO / 2Tx CDD / Core 0 & Core 2
 - o 802.11n HT20 / BPSK / MCS0 / MIMO / 3Tx CDD / Core 0, Core 1 & Core 2
 - o 802.11n HT20 / MIMO / 2Tx TxBF / MIMO / MCS0 / Core 0 & Core 2
 - o 802.11n HT20 / MIMO / 3Tx TxBF / MIMO / MCS0 / Core 0, Core 1 & Core 2
2. Final measurements were performed using the above configurations on the relevant channels. Additional channels were tested as requested by the customer.
3. For non-TxBF modes, the EUT was transmitting at >98% duty cycle and testing was performed in accordance with ANSI C63.10 Section 11.10.3 Method AVGPSD-1. The signal analyser resolution bandwidth was set to 3 kHz or 100 kHz and video bandwidth 10 kHz or 300 kHz. An RMS detector was used and sweep time set manually to perform trace averaging over 200 traces. The span was set greater than 1.5 times the 99% emission bandwidth. The highest peak of the measured signal was recorded.
4. For TxBF modes, the EUT was transmitting at <98% duty cycle and testing was performed in accordance with ANSI C63.10 Section 11.10.5 Method AVGPSD-2. The signal analyser resolution bandwidth was set to 100 kHz and video bandwidth 300 kHz. An RMS detector was used and sweep time set manually to perform trace averaging over 200 traces. The span was set greater than 1.5 times the 99% emission bandwidth.
5. For 802.11b & 802.11n MIMO CDD, PSD was measured on all ports and then combined using the *measure and sum the spectra across the outputs* technique, stated in FCC KDB 662911 D01 Section E)2)a).
6. For 802.11n MIMO TxBF, PSD was measured on all ports and then combined using the *measure and sum spectral maxima across the outputs* technique, stated in FCC KDB 662911 D01 Section E)2)b).
7. The signal analyser was connected to the RF port on the EUT using an RF switch, suitable attenuation and RF cables. An RF offset was entered on the signal analyser to compensate for the loss of the switch, attenuator and RF cables.
8. The EUT with serial number C02YF007MFLF was used for non-TxBF tests, the EUT with serial number C02YD003MFLQ was used for TxBF tests.

Transmitter Power Spectral Density (continued)**Results: 802.11b / 20 MHz / SISO / DBPSK / 1 Mbps / Core 0**


Channel	PSD (dBm/3 kHz)	Limit (dBm/3kHz)	Margin (dB)	Result
1	-10.5	8.0	18.5	Complied
2	-10.0	8.0	18.0	Complied
3	-9.2	8.0	17.2	Complied
6	-8.8	8.0	16.8	Complied
7	-9.1	8.0	17.1	Complied
11	-10.7	8.0	18.7	Complied
12	-12.1	8.0	20.1	Complied
13	-13.6	8.0	21.6	Complied

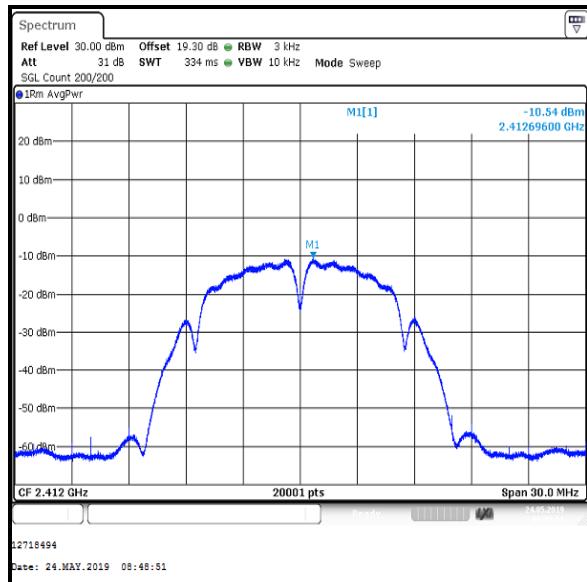Transmitter Power Spectral Density (continued)**Results: 802.11b / 20 MHz / SISO / DBPSK / 1 Mbps / Core 0**


Channel 1

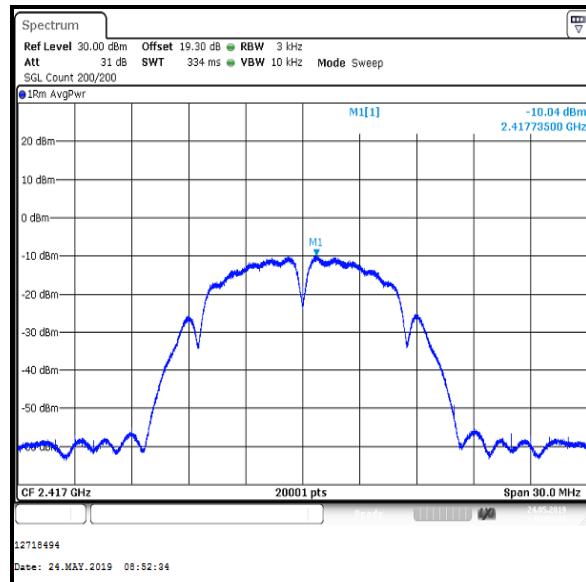


Channel 2

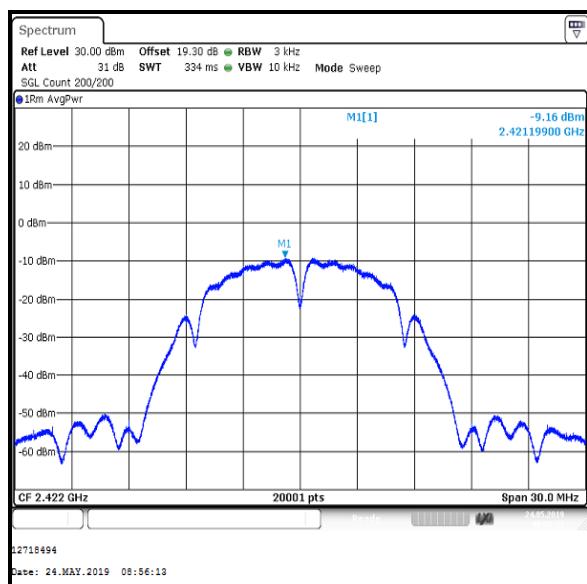


Channel 3

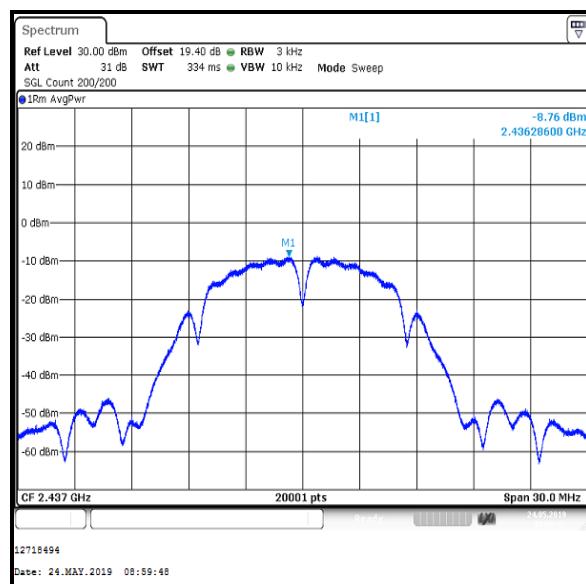


Channel 6

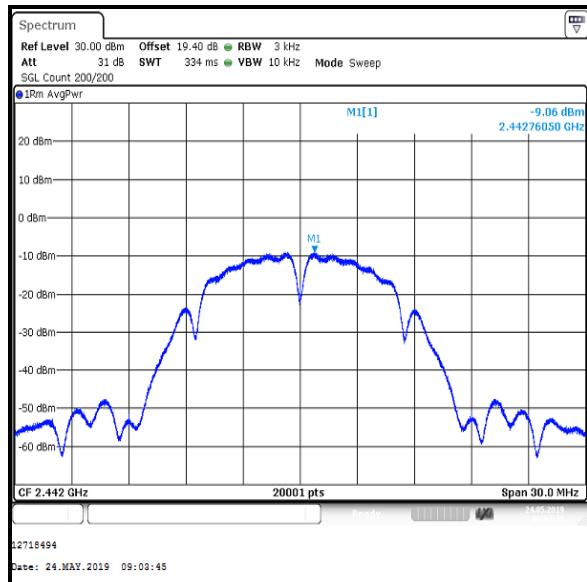Transmitter Power Spectral Density (continued)**Results: 802.11b / 20 MHz / SISO / DBPSK / 1 Mbps / Core 0**


Channel 7

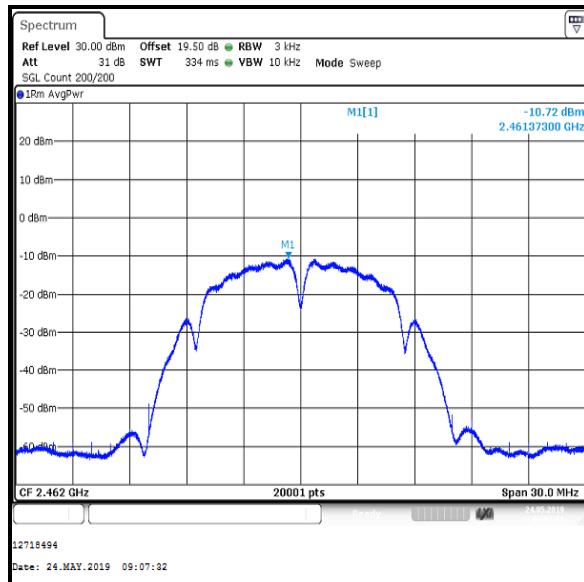

Channel 11

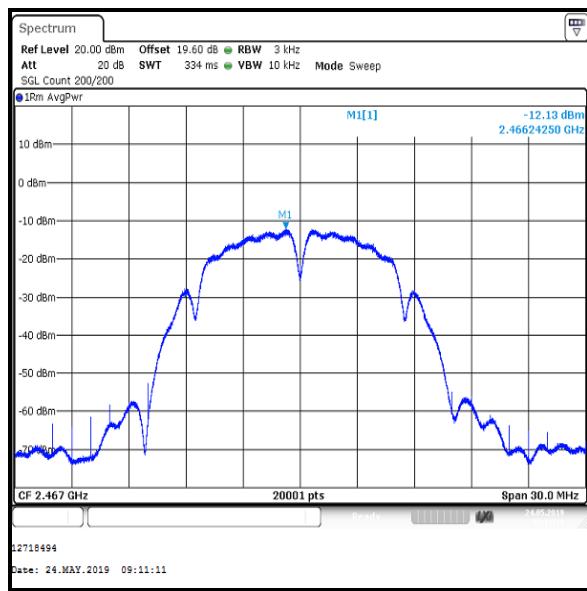


Channel 12

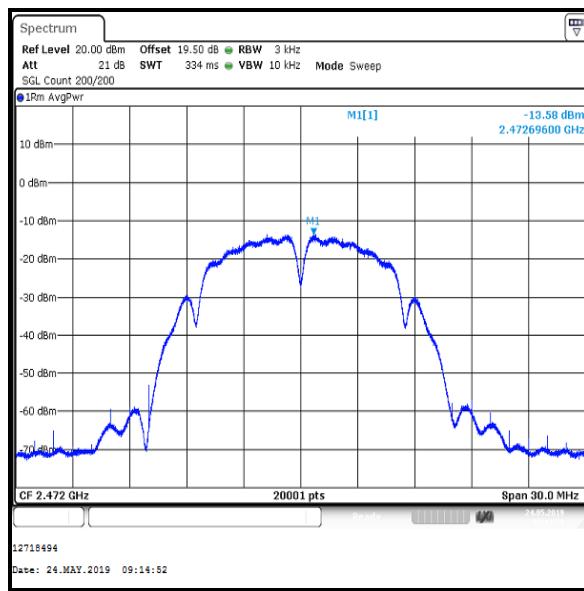


Channel 13

Transmitter Power Spectral Density (continued)**Results: 802.11g / 20 MHz / SISO / BPSK / 6 Mbps / Core 0**


Channel	PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Margin (dB)	Result
1	-11.1	8.0	19.1	Complied
2	-10.6	8.0	18.6	Complied
3	-8.2	8.0	16.2	Complied
6	-7.9	8.0	15.9	Complied
7	-7.9	8.0	15.9	Complied
11	-11.3	8.0	19.3	Complied
12	-14.4	8.0	22.4	Complied
13	-26.0	8.0	34.0	Complied

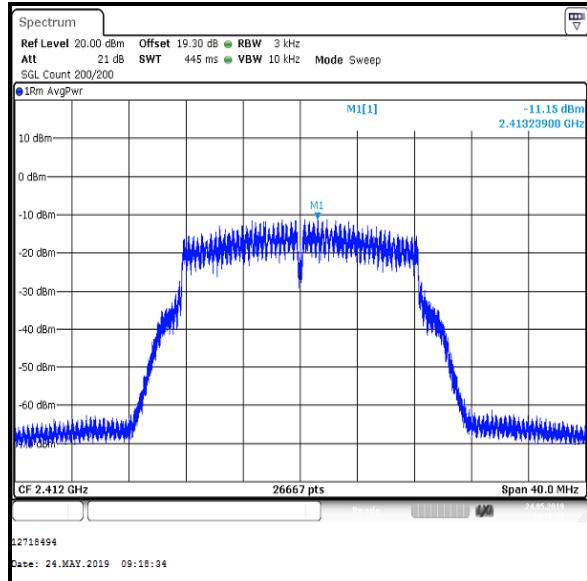Transmitter Power Spectral Density (continued)**Results: 802.11g / 20 MHz / SISO / BPSK / 6 Mbps / Core 0**


Channel 1

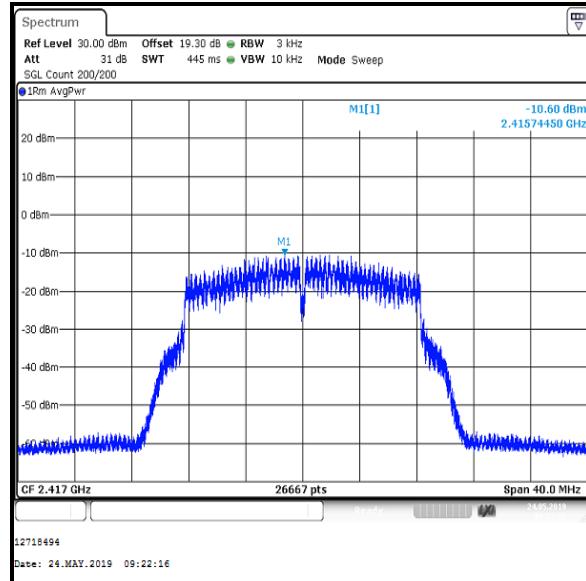


Channel 2

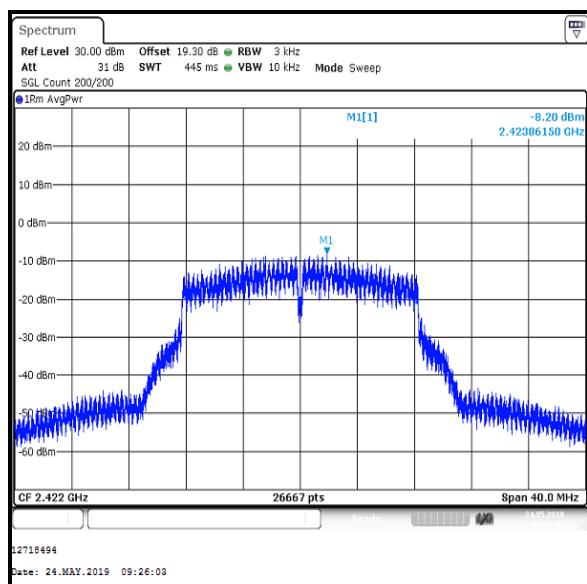


Channel 3

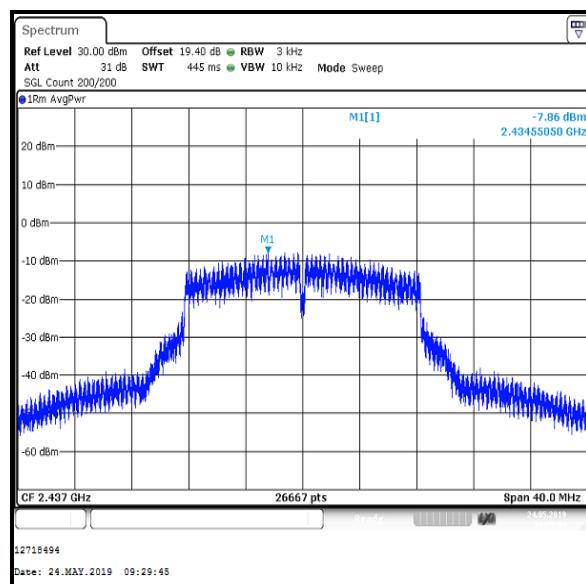


Channel 6

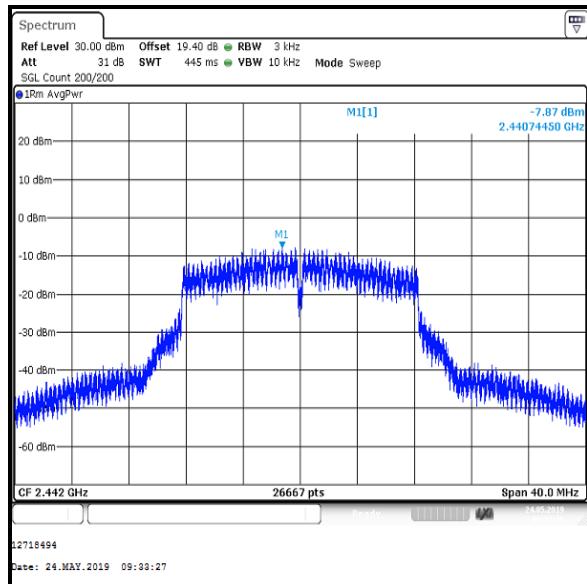Transmitter Power Spectral Density (continued)**Results: 802.11g / 20 MHz / SISO / BPSK / 6 Mbps / Core 0**


Channel 7

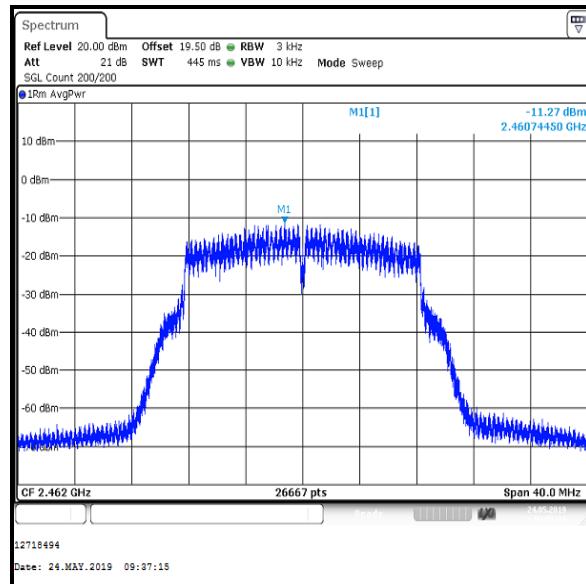

Channel 11

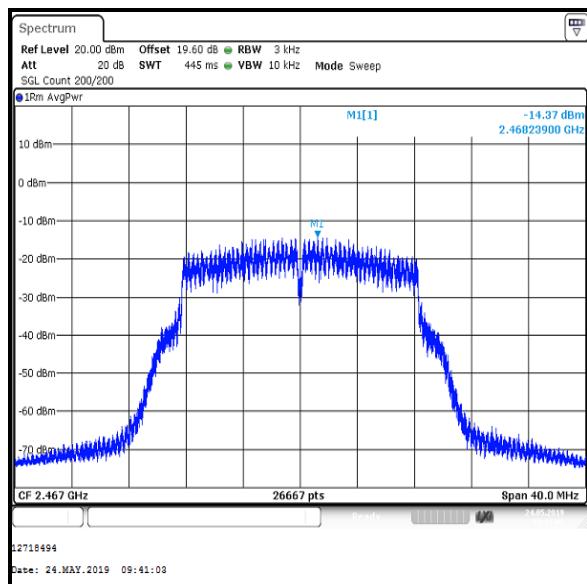


Channel 12

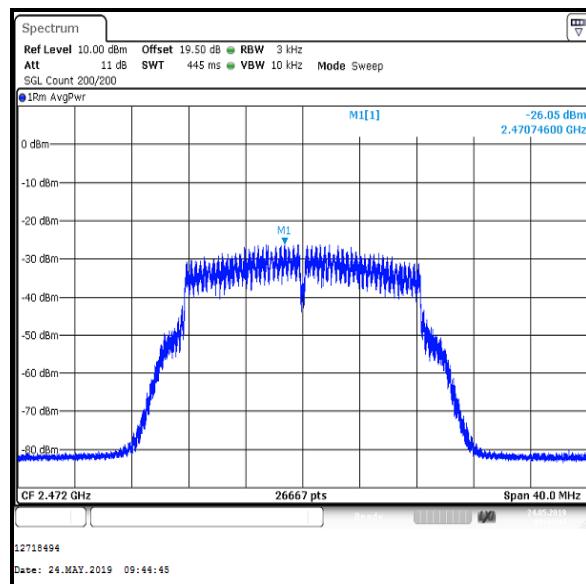


Channel 13

Transmitter Power Spectral Density (continued)**Results: 802.11n / HT20 / SISO / BPSK / MCS0 / Core 0**


Channel	PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Margin (dB)	Result
1	-13.3	8.0	21.3	Complied
2	-13.0	8.0	21.0	Complied
3	-10.9	8.0	18.9	Complied
6	-10.3	8.0	18.3	Complied
7	-10.3	8.0	18.3	Complied
11	-14.2	8.0	22.2	Complied
12	-16.9	8.0	24.9	Complied
13	-28.5	8.0	36.5	Complied

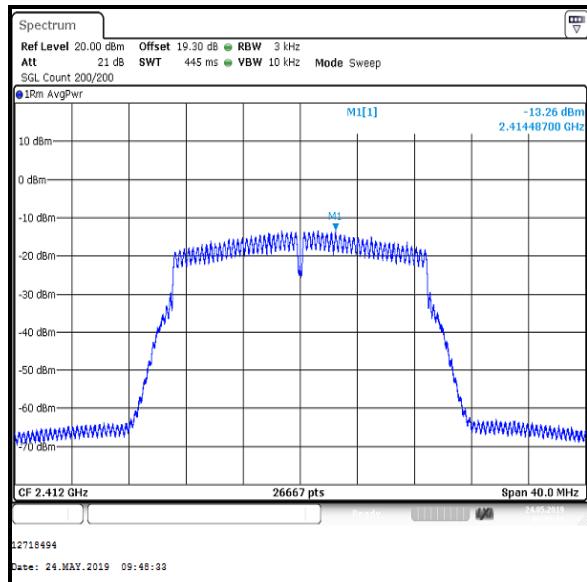Transmitter Power Spectral Density (continued)**Results: 802.11n / HT20 / SISO / BPSK / MCS0 / Core 0**


Channel 1

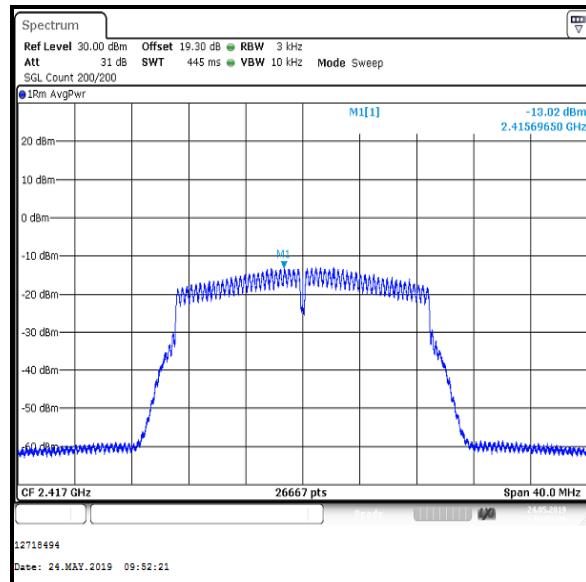





Channel 2

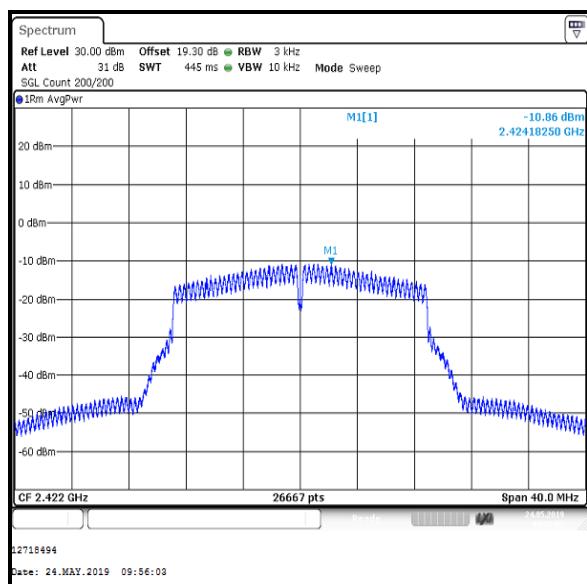

Channel 3

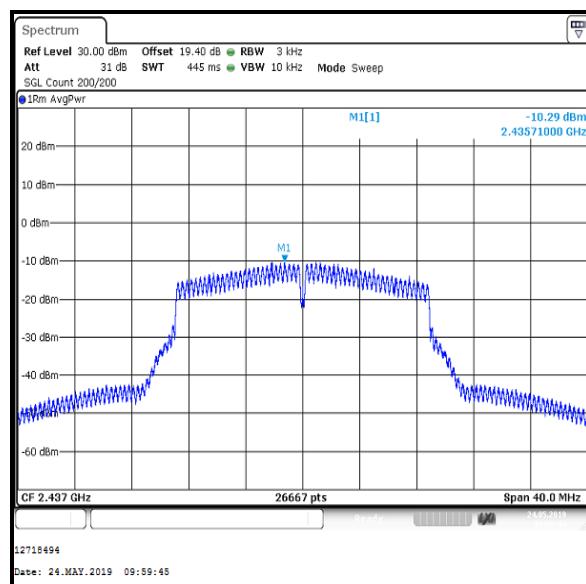


Channel 6

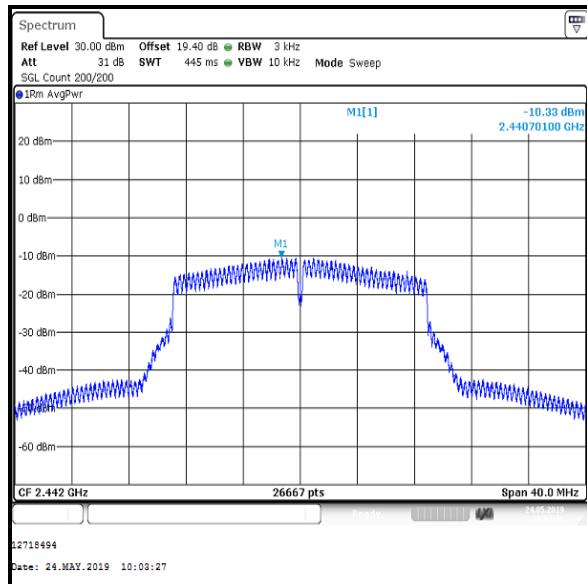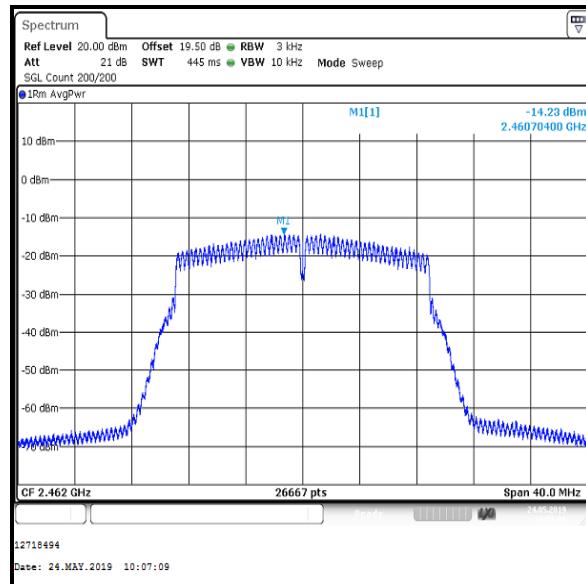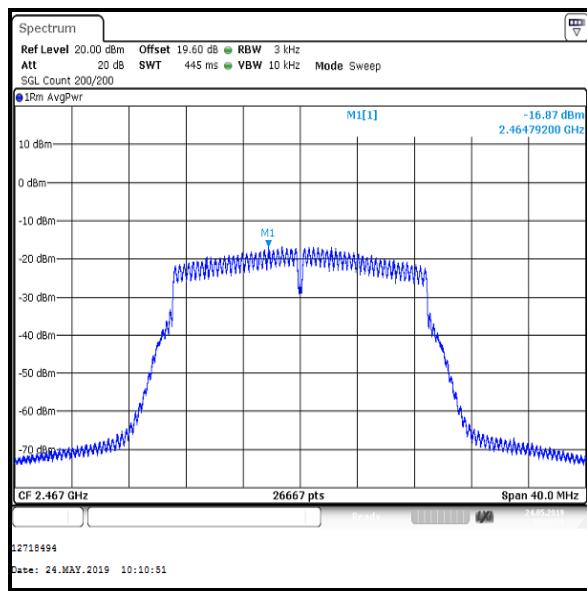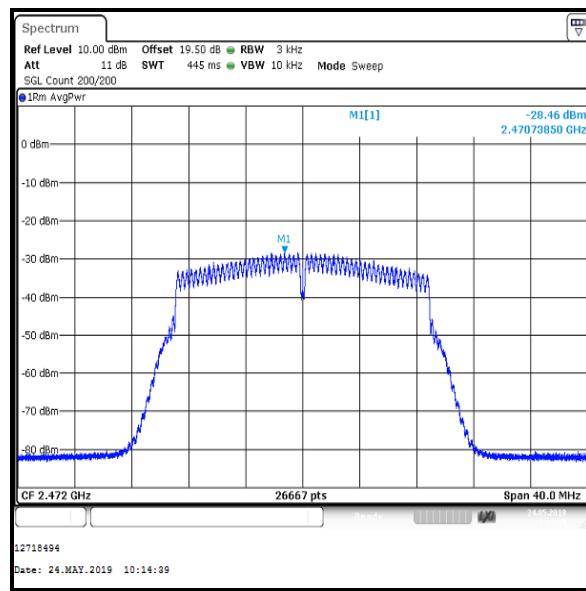
Transmitter Power Spectral Density (continued)**Results: 802.11n / HT20 / SISO / BPSK / MCS0 / Core 0****Channel 7****Channel 11****Channel 12****Channel 13**

Transmitter Power Spectral Density (continued)**Results: 802.11b / 20 MHz / MIMO / 2Tx CDD / DBPSK / 1 Mbps**


Channel	PSD / Core 0 (dBm / 3 kHz)	PSD / Core 2 (dBm / 3 kHz)	Combined PSD (dBm / 3 kHz)	Limit (dBm / 3 kHz)	Margin (dB)	Result
1	-13.1	-13.1	-10.3	8.0	18.3	Complied
2	-12.0	-11.8	-9.1	8.0	17.1	Complied
3	-10.0	-9.8	-7.0	8.0	15.0	Complied
6	-8.9	-9.2	-6.2	8.0	14.2	Complied
7	-8.9	-8.5	-5.9	8.0	13.9	Complied
11	-13.0	-12.5	-9.8	8.0	17.8	Complied
12	-14.5	-14.5	-11.7	8.0	19.7	Complied
13	-16.6	-16.5	-13.7	8.0	21.7	Complied

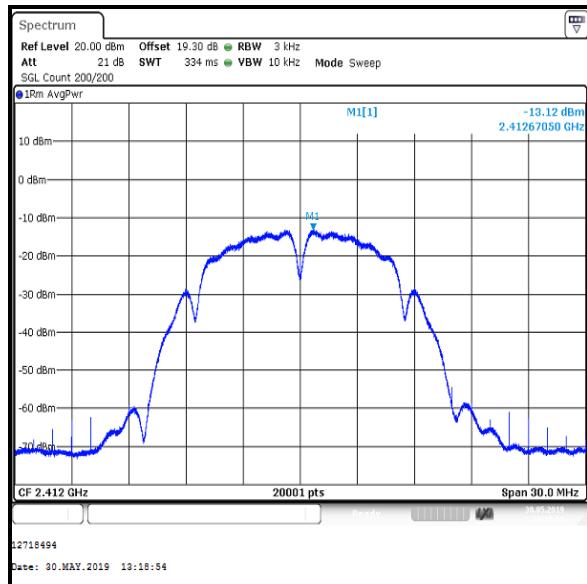Transmitter Power Spectral Density (continued)**Results: 802.11b / 20 MHz / MIMO / 2Tx CDD / DBPSK / 1 Mbps / Core 0**


Channel 1

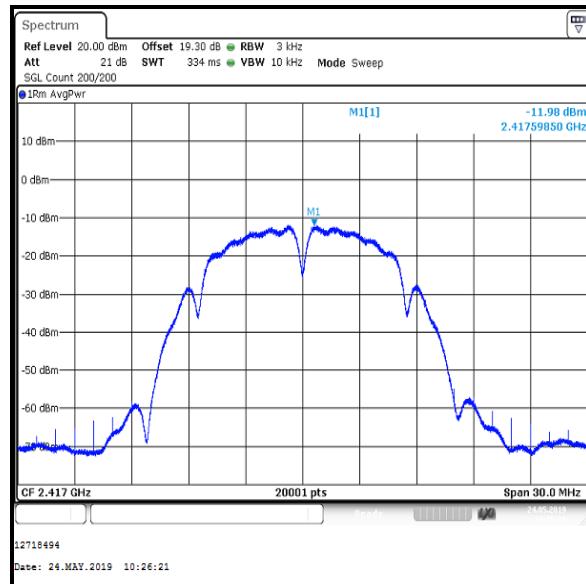


Channel 2

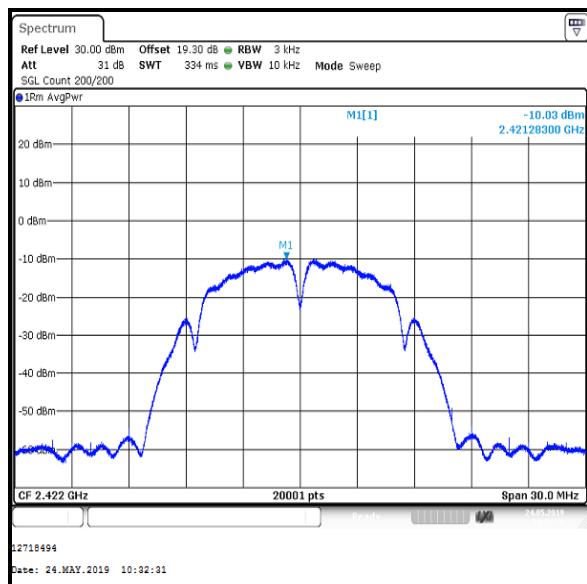


Channel 3

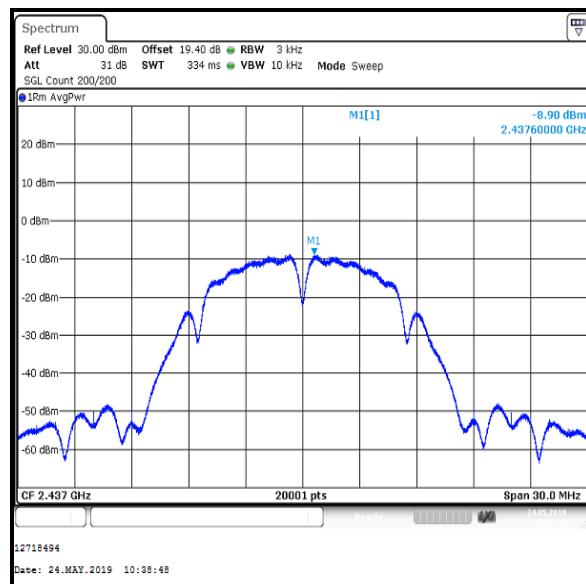


Channel 6

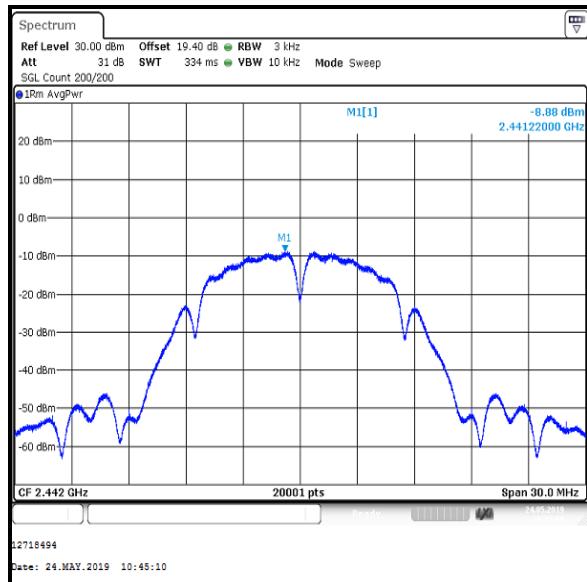Transmitter Power Spectral Density (continued)**Results: 802.11b / 20 MHz / MIMO / 2Tx CDD / DBPSK / 1 Mbps / Core 0**


Channel 7

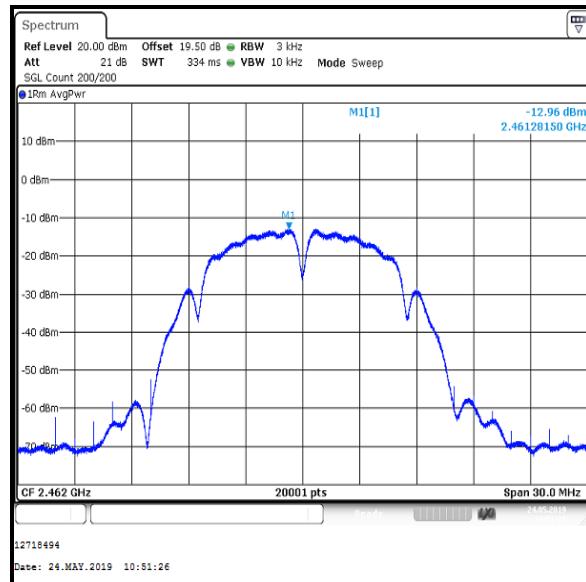


Channel 11

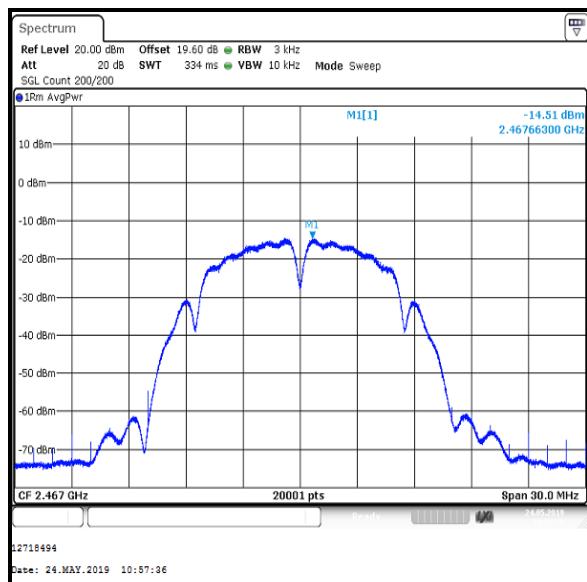


Channel 12

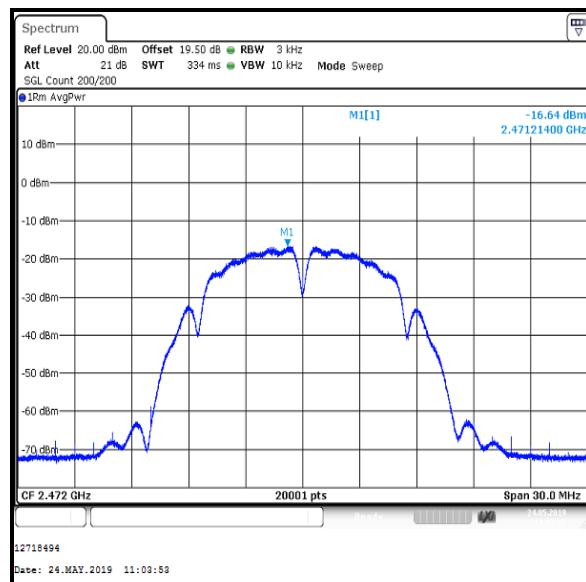


Channel 13

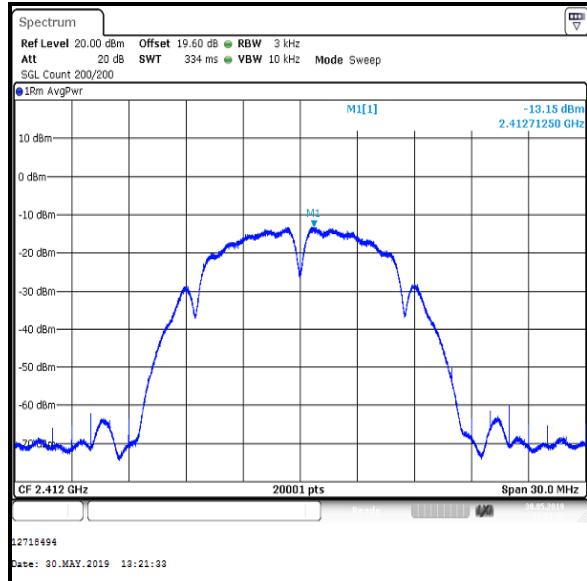Transmitter Power Spectral Density (continued)**Results: 802.11b / 20 MHz / MIMO / 2Tx CDD / DBPSK / 1 Mbps / Core 2**


Channel 1

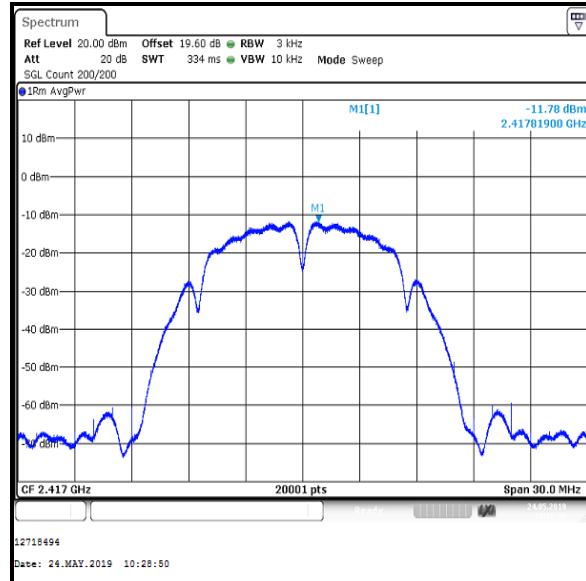


Channel 2

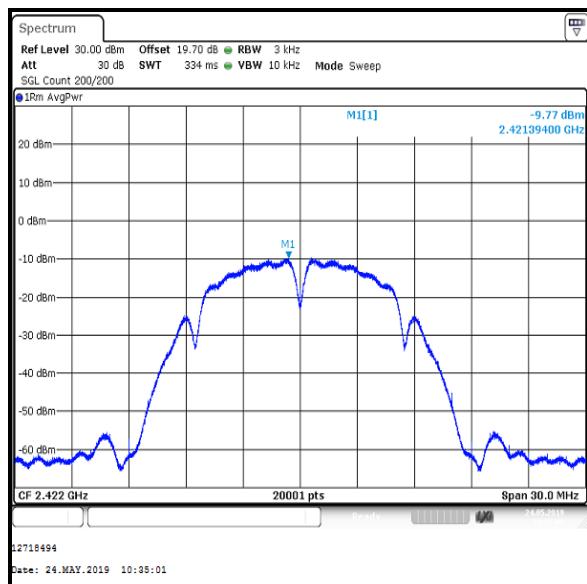


Channel 3

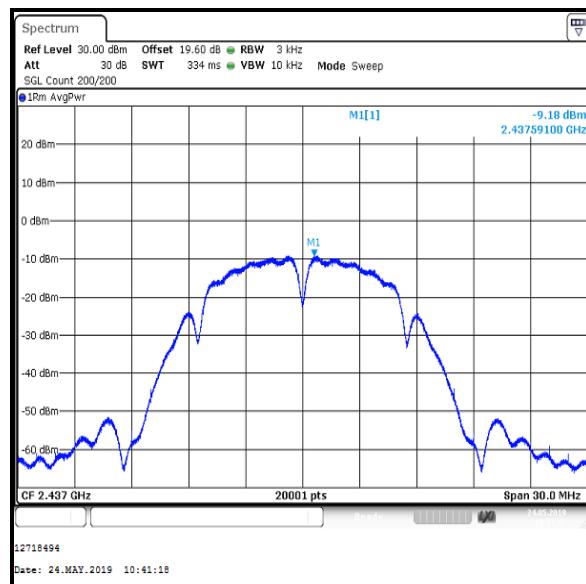


Channel 6

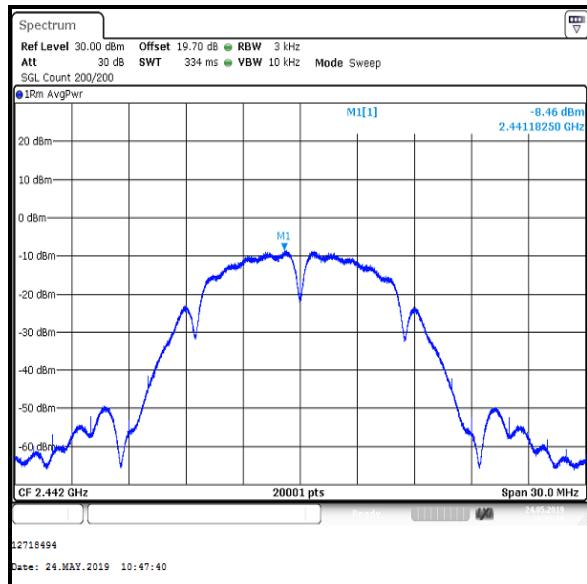Transmitter Power Spectral Density (continued)**Results: 802.11b / 20 MHz / MIMO / 2Tx CDD / DBPSK / 1 Mbps / Core 2**


Channel 7

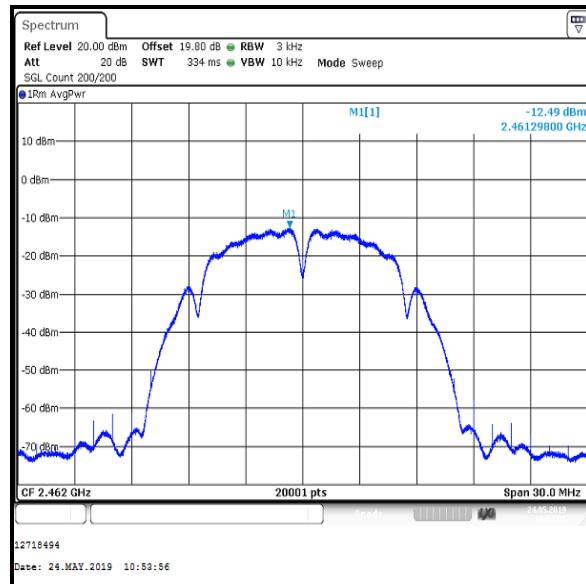

Channel 11

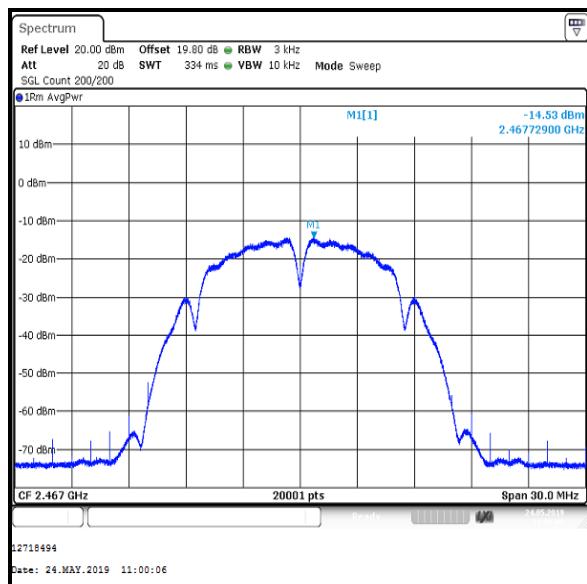

Channel 12

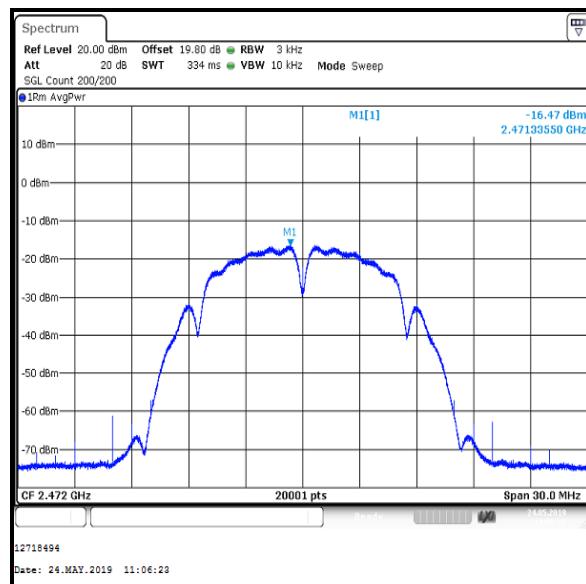


Channel 13


Transmitter Power Spectral Density (continued)**Results: 802.11b / 20 MHz / MIMO / 3Tx CDD / DBPSK / 1 Mbps**

Channel	PSD / Core 0 (dBm / 3 kHz)	PSD / Core 1 (dBm / 3 kHz)	PSD / Core 2 (dBm / 3 kHz)
1	-14.1	-14.3	-14.1
2	-12.9	-13.3	-13.0
3	-11.5	-11.5	-11.1
6	-9.5	-9.2	-9.5
7	-9.1	-9.3	-9.4
11	-13.8	-13.6	-14.0
12	-15.1	-15.2	-14.7
13	-16.5	-16.7	-16.4


Channel	Combined PSD (dBm / 3 kHz)	PSD Limit (dBm / 3 kHz)	Margin (dB)	Result
1	-9.9	8.0	17.9	Complied
2	-8.6	8.0	16.6	Complied
3	-6.7	8.0	14.7	Complied
6	-4.7	8.0	12.7	Complied
7	-4.8	8.0	12.8	Complied
11	-9.4	8.0	17.4	Complied
12	-10.5	8.0	18.5	Complied
13	-12.0	8.0	20.0	Complied

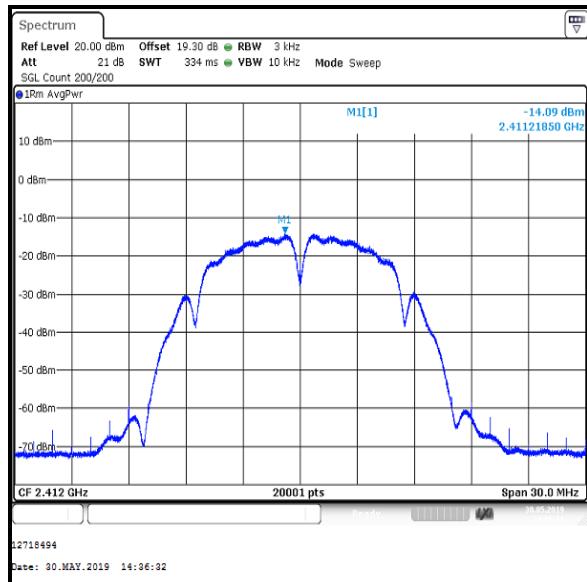Transmitter Power Spectral Density (continued)**Results: 802.11b / 20 MHz / MIMO / 3Tx CDD / DBPSK / 1 Mbps / Core 0**


Channel 1

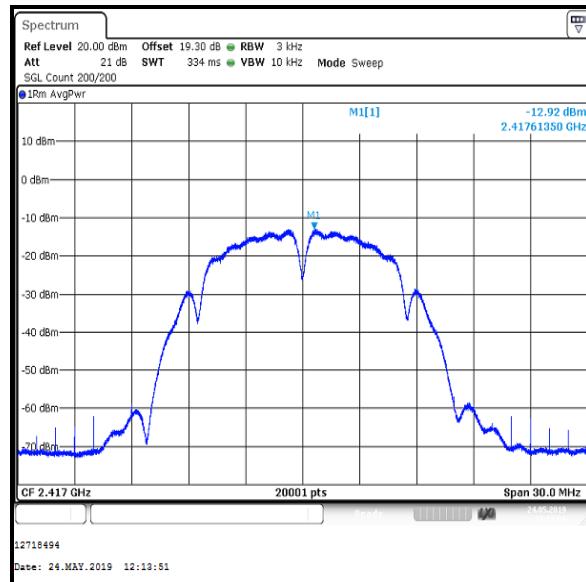


Channel 2

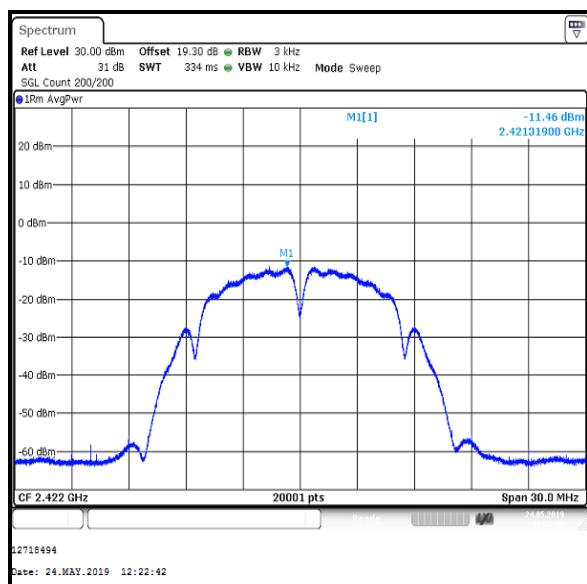


Channel 3

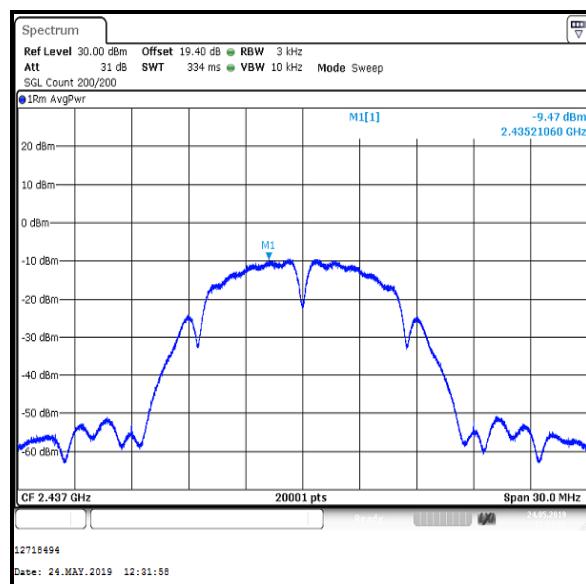


Channel 6

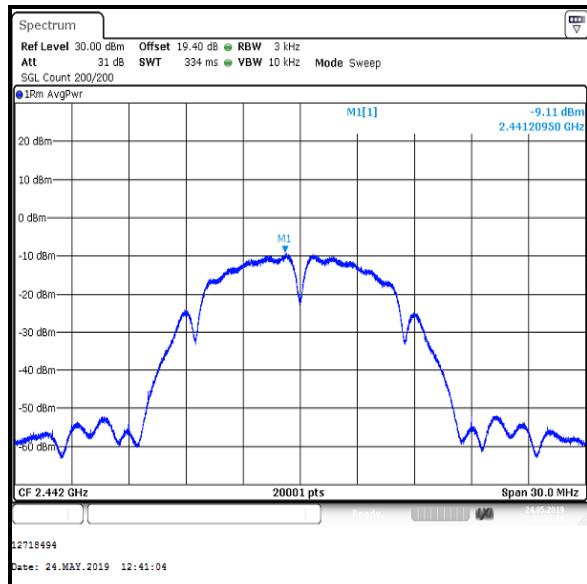Transmitter Power Spectral Density (continued)**Results: 802.11b / 20 MHz / MIMO / 3Tx CDD / DBPSK / 1 Mbps / Core 0**


Channel 7

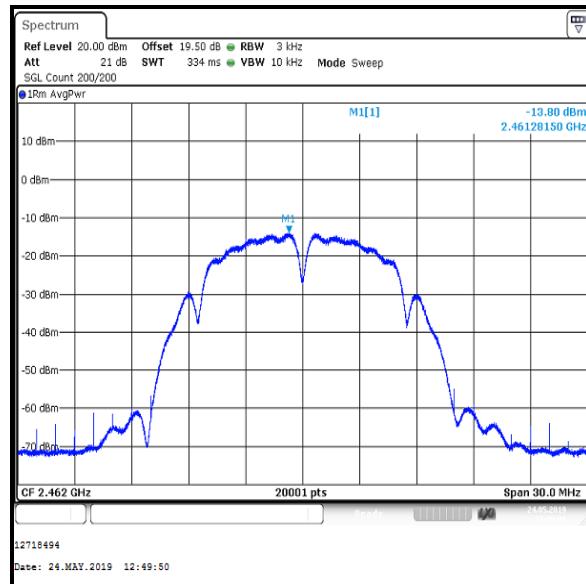


Channel 11

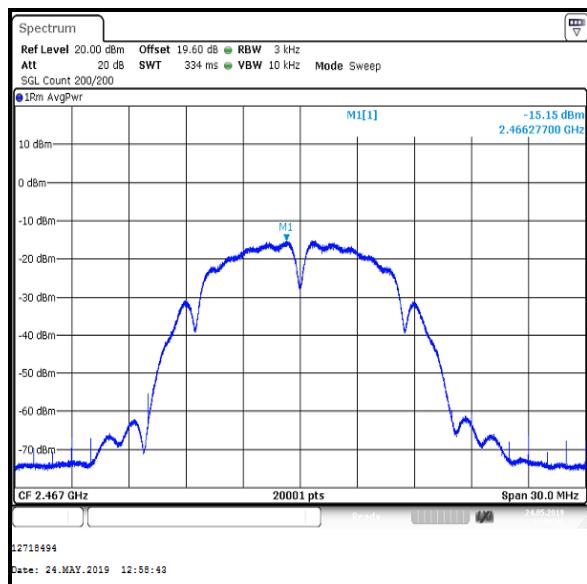


Channel 12

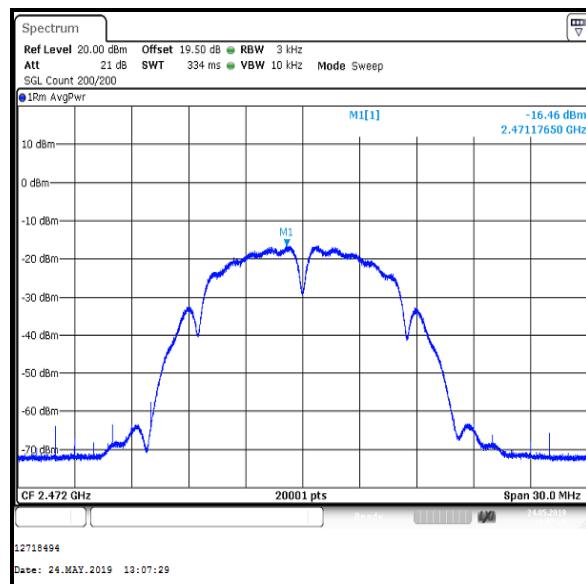


Channel 13

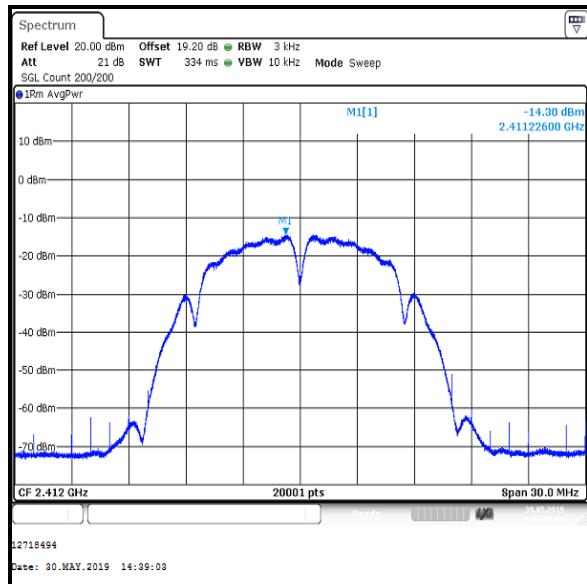Transmitter Power Spectral Density (continued)**Results: 802.11b / 20 MHz / MIMO / 3Tx CDD / DBPSK / 1 Mbps / Core 1**


Channel 1

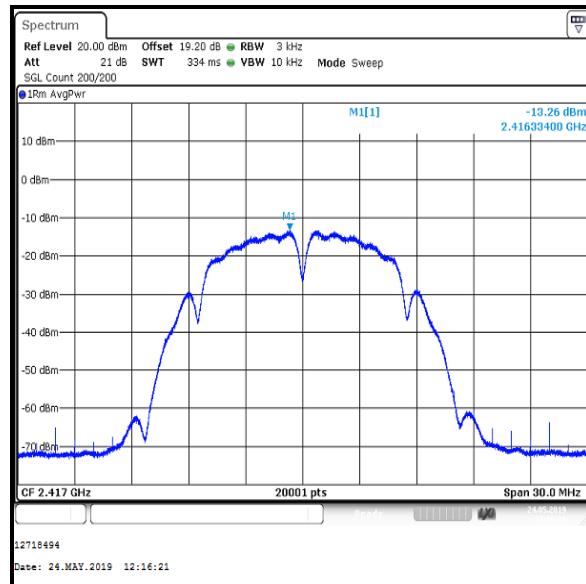





Channel 2

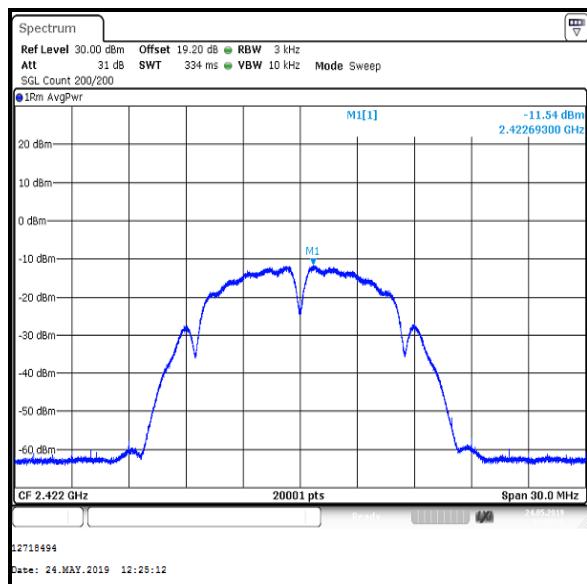


Channel 3

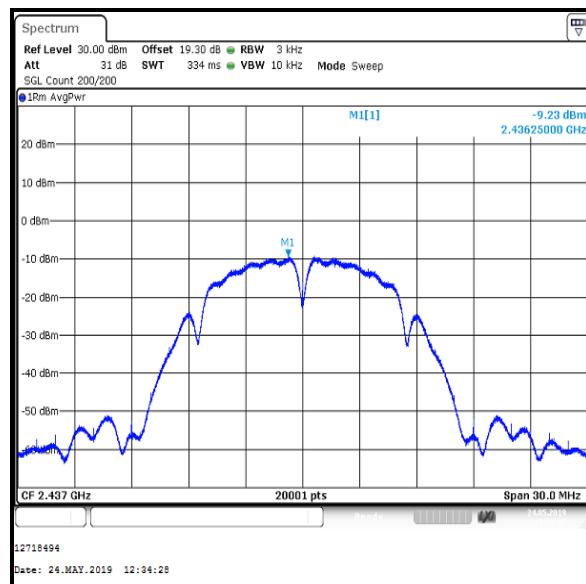


Channel 6

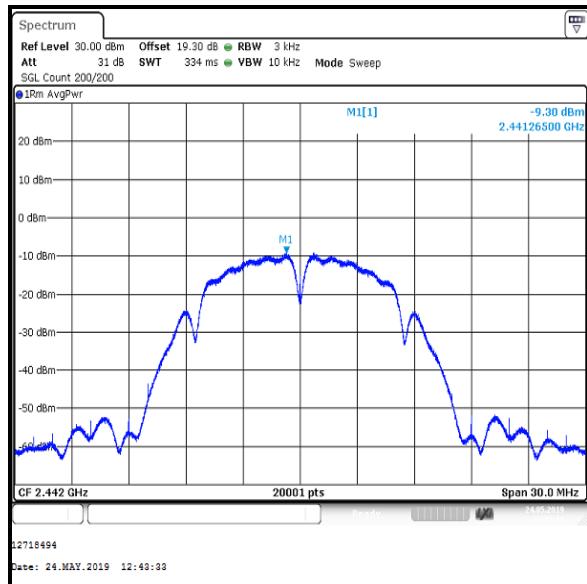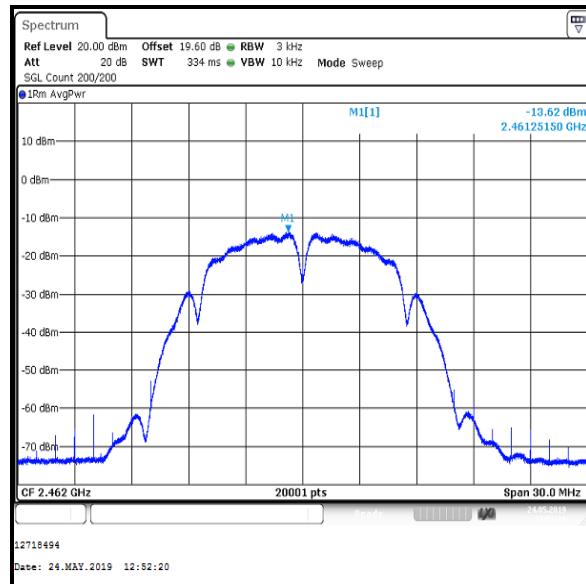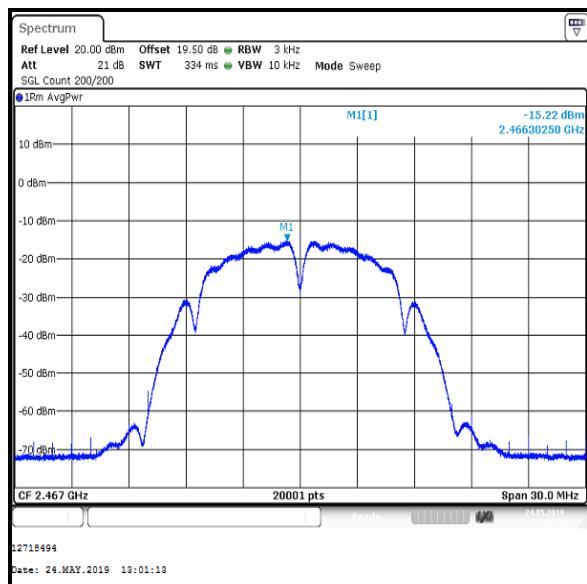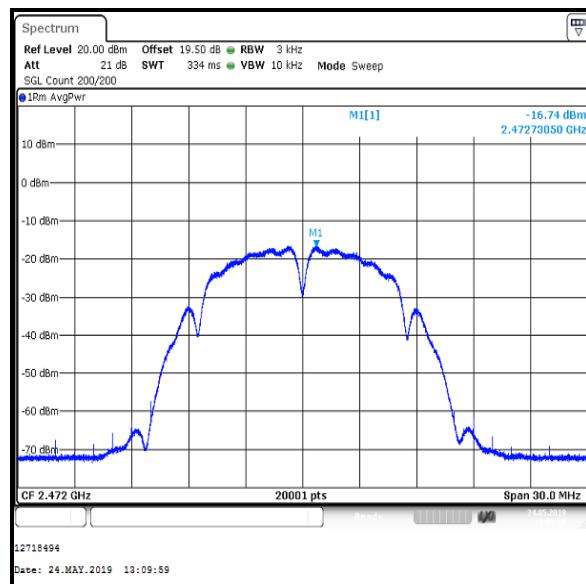
Transmitter Power Spectral Density (continued)**Results: 802.11b / 20 MHz / MIMO / 3Tx CDD / DBPSK / 1 Mbps / Core 1****Channel 7****Channel 11****Channel 12****Channel 13**

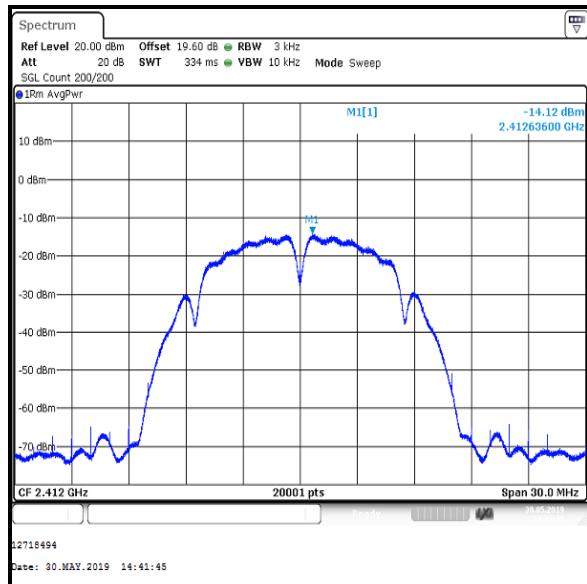Transmitter Power Spectral Density (continued)**Results: 802.11b / 20 MHz / MIMO / 3Tx CDD / DBPSK / 1 Mbps / Core 2**


Channel 1

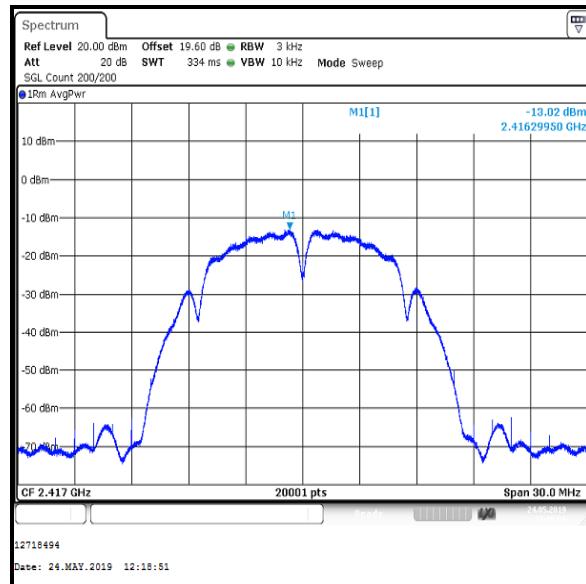





Channel 2

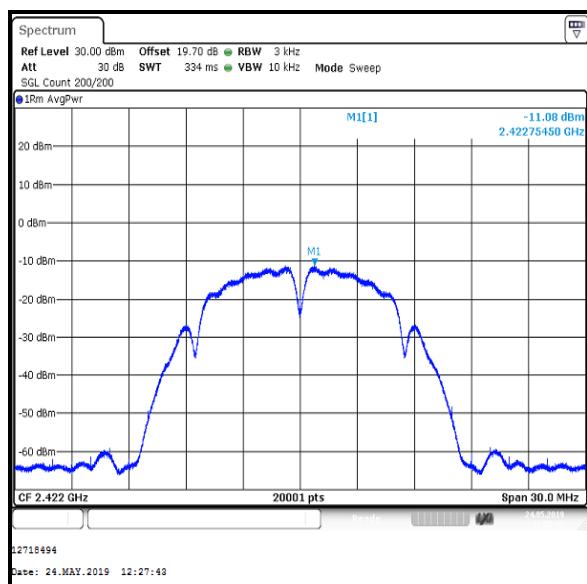

Channel 3

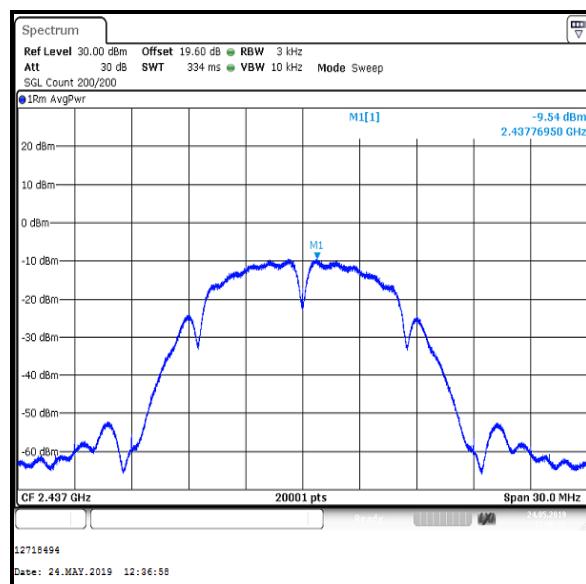

Channel 6

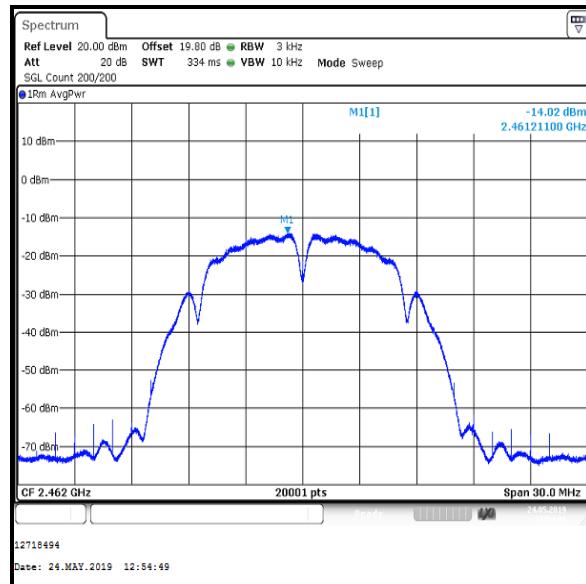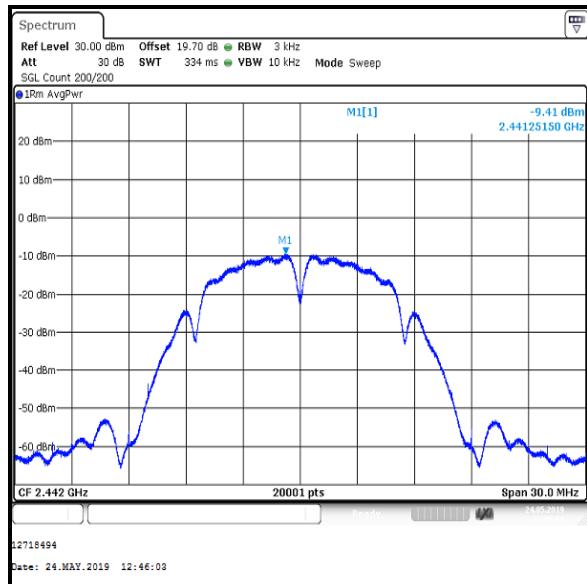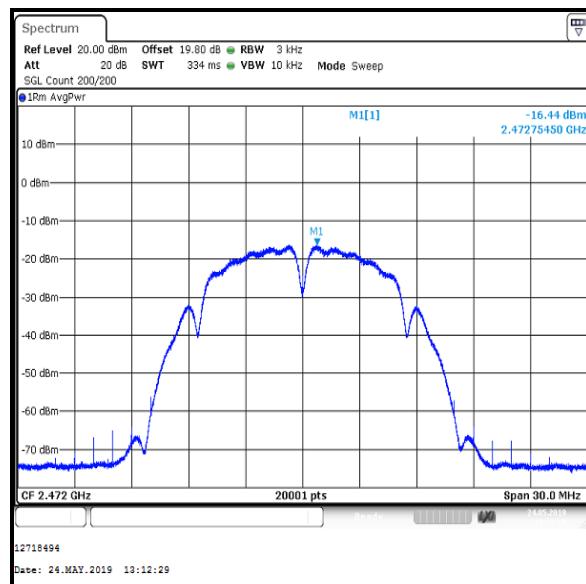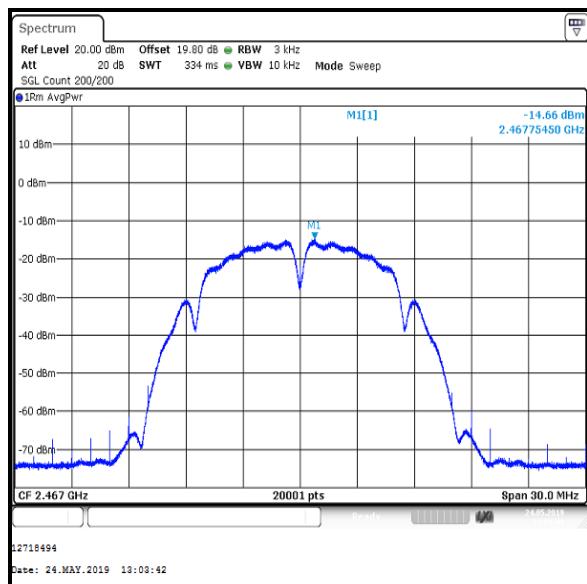Transmitter Power Spectral Density (continued)**Results: 802.11b / 20 MHz / MIMO / 3Tx CDD / DBPSK / 1 Mbps / Core 2****Channel 7****Channel 11****Channel 12****Channel 13**

Transmitter Power Spectral Density (continued)**Results: 802.11n / HT20 / MIMO / 2Tx CDD / BPSK / MCS0**

Channel	PSD / Core 0 (dBm / 3 kHz)	PSD / Core 2 (dBm / 3 kHz)	Combined PSD (dBm / 3 kHz)	Limit (dBm / 3 kHz)	Margin (dB)	Result
1	-17.6	-17.6	-14.9	8.0	22.9	Complied
2	-15.7	-15.7	-12.8	8.0	20.8	Complied
3	-13.7	-13.5	-10.9	8.0	18.9	Complied
6	-10.3	-10.2	-7.5	8.0	15.5	Complied
7	-10.2	-10.4	-7.7	8.0	15.7	Complied
11	-17.7	-17.7	-14.9	8.0	22.9	Complied
12	-18.7	-18.8	-16.0	8.0	24.0	Complied
13	-30.5	-29.8	-27.5	8.0	35.5	Complied