

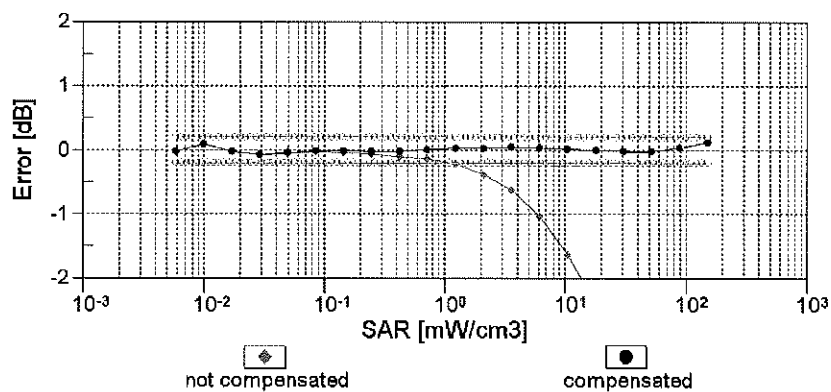


Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f_{\text{eval}} = 1900 \text{ MHz}$)

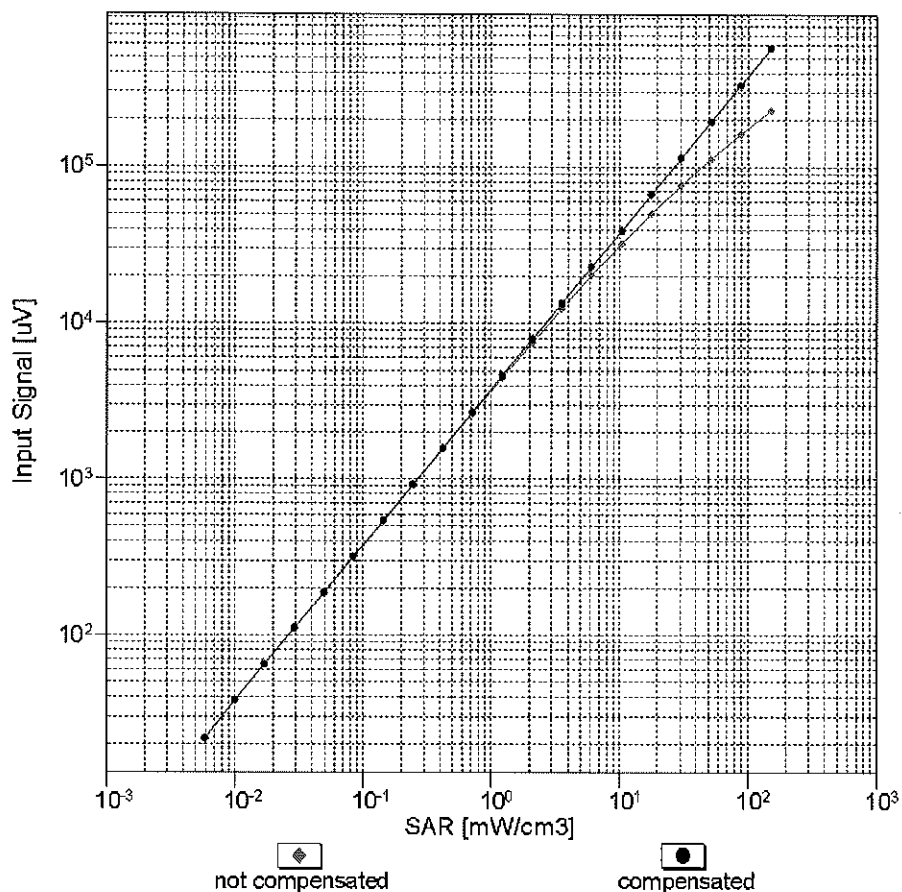



Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

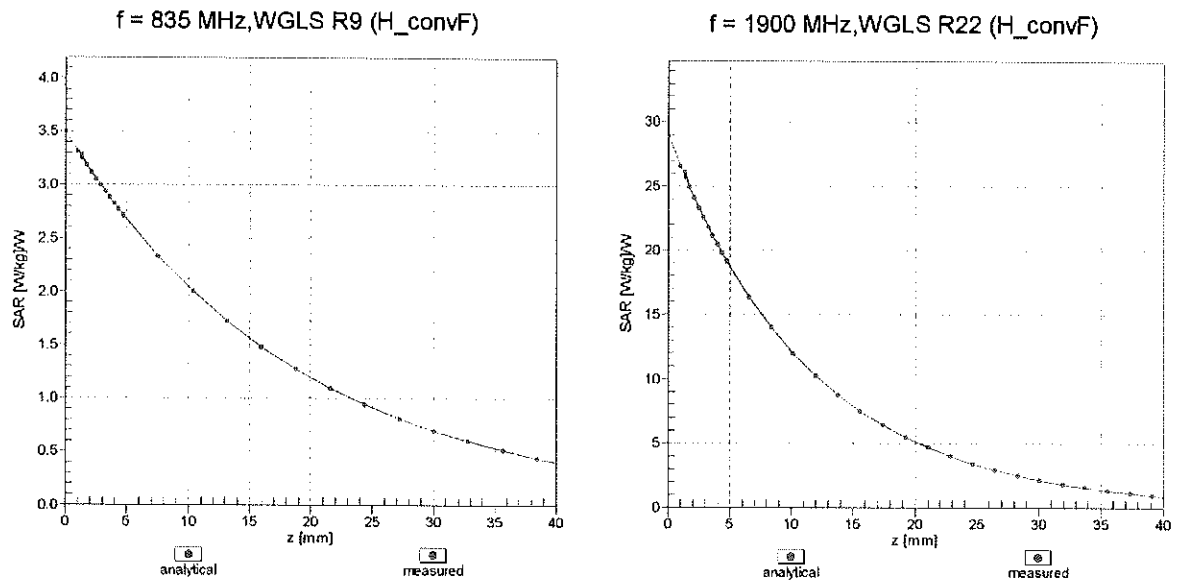

Deviation from Isotropy in Liquid

Error (ϕ, θ), $f = 900 \text{ MHz}$

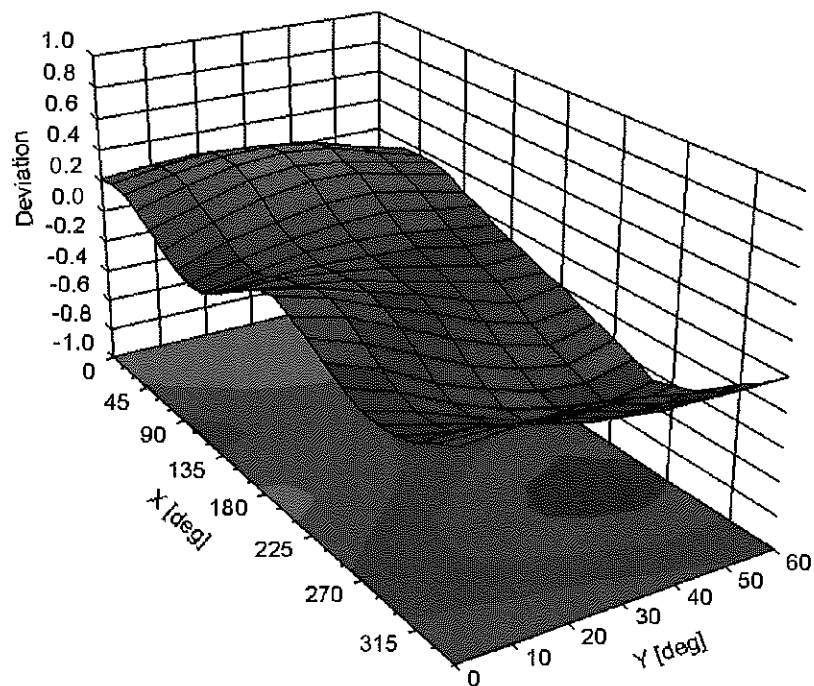

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7416

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-25.3
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Appendix: Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB/μV	C	D dB	VR mV	Max Unc ^E (k=2)
0	CW	X	0.00	0.00	1.00	0.00	149.4	± 3.3 %
		Y	0.00	0.00	1.00		140.2	
		Z	0.00	0.00	1.00		147.9	
10010- CAA	SAR Validation (Square, 100ms, 10ms)	X	1.77	64.87	9.11	10.00	20.0	± 9.6 %
		Y	1.63	63.41	8.37		20.0	
		Z	1.76	64.55	8.94		20.0	
10011- CAB	UMTS-FDD (WCDMA)	X	1.21	72.37	17.53	0.00	150.0	± 9.6 %
		Y	0.82	64.46	12.98		150.0	
		Z	0.96	66.91	14.78		150.0	
10012- CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	X	1.14	65.01	16.27	0.41	150.0	± 9.6 %
		Y	1.05	62.41	14.04		150.0	
		Z	1.12	63.56	15.01		150.0	
10013- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	X	4.63	67.24	17.52	1.46	150.0	± 9.6 %
		Y	4.63	66.45	16.87		150.0	
		Z	4.71	66.75	17.07		150.0	
10021- DAC	GSM-FDD (TDMA, GMSK)	X	100.00	114.11	26.55	9.39	50.0	± 9.6 %
		Y	100.00	109.62	24.58		50.0	
		Z	100.00	111.08	25.19		50.0	
10023- DAC	GPRS-FDD (TDMA, GMSK, TN 0)	X	100.00	112.70	25.96	9.57	50.0	± 9.6 %
		Y	100.00	108.79	24.27		50.0	
		Z	100.00	110.19	24.84		50.0	
10024- DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	X	100.00	120.02	28.01	6.56	60.0	± 9.6 %
		Y	100.00	111.41	24.12		60.0	
		Z	100.00	114.41	25.59		60.0	
10025- DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	X	8.40	100.18	43.08	12.57	50.0	± 9.6 %
		Y	3.56	67.47	25.23		50.0	
		Z	6.34	88.37	36.90		50.0	
10026- DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	X	6.98	91.66	34.92	9.56	60.0	± 9.6 %
		Y	5.10	80.82	29.16		60.0	
		Z	6.93	89.58	33.16		60.0	
10027- DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	X	100.00	130.74	31.67	4.80	80.0	± 9.6 %
		Y	100.00	114.42	24.52		80.0	
		Z	100.00	119.79	27.11		80.0	
10028- DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	X	100.00	148.32	37.98	3.55	100.0	± 9.6 %
		Y	100.00	117.49	25.01		100.0	
		Z	100.00	127.11	29.41		100.0	
10029- DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	X	4.35	78.88	28.05	7.80	80.0	± 9.6 %
		Y	3.59	72.82	24.31		80.0	
		Z	4.33	77.60	26.71		80.0	
10030- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	X	100.00	119.14	27.08	5.30	70.0	± 9.6 %
		Y	100.00	109.23	22.63		70.0	
		Z	100.00	113.47	24.71		70.0	
10031- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	X	100.00	161.91	40.82	1.88	100.0	± 9.6 %
		Y	100.00	96.93	15.49		100.0	
		Z	100.00	123.29	26.32		100.0	

10032-CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	X	100.00	280.92	82.03	1.17	100.0	± 9.6 %
		Y	0.12	60.00	4.04		100.0	
		Z	100.00	135.50	29.96		100.0	
10033-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	X	100.00	128.03	33.18	5.30	70.0	± 9.6 %
		Y	7.89	90.52	23.51		70.0	
		Z	61.16	122.77	32.75		70.0	
10034-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	X	100.00	117.76	27.00	1.88	100.0	± 9.6 %
		Y	1.49	69.12	13.56		100.0	
		Z	3.50	80.40	18.67		100.0	
10035-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)	X	6.88	86.78	18.70	1.17	100.0	± 9.6 %
		Y	1.08	66.04	11.73		100.0	
		Z	1.93	73.40	15.69		100.0	
10036-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	X	100.00	128.79	33.51	5.30	70.0	± 9.6 %
		Y	12.46	97.66	25.74		70.0	
		Z	100.00	130.93	34.74		70.0	
10037-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	X	62.76	112.55	25.87	1.88	100.0	± 9.6 %
		Y	1.37	68.27	13.18		100.0	
		Z	2.98	78.43	17.97		100.0	
10038-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	X	8.30	89.45	19.68	1.17	100.0	± 9.6 %
		Y	1.08	66.20	11.94		100.0	
		Z	1.95	73.76	15.98		100.0	
10039-CAB	CDMA2000 (1xRTT, RC1)	X	0.88	65.39	10.07	0.00	150.0	± 9.6 %
		Y	0.87	63.82	9.91		150.0	
		Z	1.31	68.61	13.02		150.0	
10042-CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	X	100.00	110.34	24.10	7.78	50.0	± 9.6 %
		Y	100.00	105.89	22.09		50.0	
		Z	100.00	108.02	23.10		50.0	
10044-CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	X	0.01	123.11	1.52	0.00	150.0	± 9.6 %
		Y	0.01	119.53	3.43		150.0	
		Z	0.00	101.85	5.28		150.0	
10048-CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	X	100.00	106.52	24.67	13.80	25.0	± 9.6 %
		Y	32.57	91.78	20.89		25.0	
		Z	100.00	105.11	24.06		25.0	
10049-CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	X	1149.99	136.06	30.09	10.79	40.0	± 9.6 %
		Y	85.21	104.98	23.36		40.0	
		Z	420.34	123.09	27.26		40.0	
10056-CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	X	100.00	123.43	32.32	9.03	50.0	± 9.6 %
		Y	100.00	121.65	31.62		50.0	
		Z	100.00	123.95	32.75		50.0	
10058-DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	X	3.53	74.19	24.94	6.55	100.0	± 9.6 %
		Y	3.03	69.69	21.96		100.0	
		Z	3.51	73.08	23.72		100.0	
10059-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	X	1.18	66.36	17.11	0.61	110.0	± 9.6 %
		Y	1.05	63.01	14.46		110.0	
		Z	1.13	64.45	15.58		110.0	
10060-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	X	100.00	153.23	41.70	1.30	110.0	± 9.6 %
		Y	1.65	79.63	20.25		110.0	
		Z	14.24	114.10	31.29		110.0	

10061-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	X	4.44	94.01	28.61	2.04	110.0	± 9.6 %
		Y	1.48	71.54	18.86		110.0	
		Z	2.17	78.36	22.10		110.0	
10062-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	X	4.41	67.11	16.83	0.49	100.0	± 9.6 %
		Y	4.42	66.37	16.23		100.0	
		Z	4.51	66.70	16.45		100.0	
10063-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)	X	4.44	67.26	16.97	0.72	100.0	± 9.6 %
		Y	4.44	66.46	16.33		100.0	
		Z	4.52	66.80	16.56		100.0	
10064-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)	X	4.66	67.43	17.15	0.86	100.0	± 9.6 %
		Y	4.68	66.69	16.56		100.0	
		Z	4.77	67.02	16.77		100.0	
10065-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	X	4.54	67.28	17.27	1.21	100.0	± 9.6 %
		Y	4.55	66.53	16.64		100.0	
		Z	4.64	66.88	16.86		100.0	
10066-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)	X	4.54	67.27	17.43	1.46	100.0	± 9.6 %
		Y	4.56	66.53	16.81		100.0	
		Z	4.65	66.89	17.03		100.0	
10067-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)	X	4.83	67.58	17.95	2.04	100.0	± 9.6 %
		Y	4.85	66.84	17.32		100.0	
		Z	4.94	67.15	17.53		100.0	
10068-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	X	4.87	67.55	18.17	2.55	100.0	± 9.6 %
		Y	4.87	66.73	17.49		100.0	
		Z	4.96	67.06	17.70		100.0	
10069-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	X	4.92	67.54	18.34	2.67	100.0	± 9.6 %
		Y	4.94	66.78	17.69		100.0	
		Z	5.03	67.10	17.91		100.0	
10071-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	X	4.73	67.33	17.85	1.99	100.0	± 9.6 %
		Y	4.72	66.52	17.18		100.0	
		Z	4.80	66.81	17.37		100.0	
10072-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	X	4.68	67.58	18.08	2.30	100.0	± 9.6 %
		Y	4.66	66.72	17.36		100.0	
		Z	4.75	67.06	17.58		100.0	
10073-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	X	4.75	67.85	18.49	2.83	100.0	± 9.6 %
		Y	4.71	66.88	17.70		100.0	
		Z	4.80	67.22	17.92		100.0	
10074-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	X	4.77	67.84	18.69	3.30	100.0	± 9.6 %
		Y	4.71	66.81	17.86		100.0	
		Z	4.79	67.13	18.08		100.0	
10075-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	X	4.79	67.83	18.96	3.82	90.0	± 9.6 %
		Y	4.72	66.78	18.11		90.0	
		Z	4.80	67.13	18.34		90.0	
10076-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	X	4.82	67.68	19.13	4.15	90.0	± 9.6 %
		Y	4.76	66.65	18.28		90.0	
		Z	4.83	66.97	18.50		90.0	
10077-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	X	4.86	67.80	19.27	4.30	90.0	± 9.6 %
		Y	4.78	66.73	18.39		90.0	
		Z	4.86	67.05	18.61		90.0	

10081-CAB	CDMA2000 (1xRTT, RC3)	X	0.44	61.65	7.56	0.00	150.0	± 9.6 %
		Y	0.49	61.12	7.86		150.0	
		Z	0.64	63.85	10.26		150.0	
10082-CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	X	0.89	61.48	3.95	4.77	80.0	± 9.6 %
		Y	0.59	60.00	2.93		80.0	
		Z	0.55	60.00	3.58		80.0	
10090-DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	X	100.00	120.10	28.07	6.56	60.0	± 9.6 %
		Y	100.00	111.49	24.17		60.0	
		Z	100.00	114.44	25.62		60.0	
10097-CAB	UMTS-FDD (HSDPA)	X	2.01	71.24	16.81	0.00	150.0	± 9.6 %
		Y	1.59	66.13	14.13		150.0	
		Z	1.77	67.84	15.37		150.0	
10098-CAB	UMTS-FDD (HSUPA, Subtest 2)	X	1.98	71.24	16.82	0.00	150.0	± 9.6 %
		Y	1.56	66.06	14.09		150.0	
		Z	1.73	67.79	15.34		150.0	
10099-DAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	X	7.05	91.92	35.02	9.56	60.0	± 9.6 %
		Y	5.13	80.96	29.22		60.0	
		Z	7.00	89.81	33.25		60.0	
10100-CAE	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	3.04	71.26	17.51	0.00	150.0	± 9.6 %
		Y	2.71	68.34	15.65		150.0	
		Z	2.94	69.85	16.50		150.0	
10101-CAE	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	3.07	67.87	16.34	0.00	150.0	± 9.6 %
		Y	2.97	66.45	15.26		150.0	
		Z	3.10	67.26	15.77		150.0	
10102-CAE	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	3.17	67.84	16.41	0.00	150.0	± 9.6 %
		Y	3.08	66.51	15.39		150.0	
		Z	3.20	67.26	15.86		150.0	
10103-CAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	5.93	77.85	22.25	3.98	65.0	± 9.6 %
		Y	4.91	73.42	19.90		65.0	
		Z	5.48	75.26	20.69		65.0	
10104-CAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	5.36	73.42	20.98	3.98	65.0	± 9.6 %
		Y	4.85	70.69	19.33		65.0	
		Z	5.38	72.53	20.20		65.0	
10105-CAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	5.20	72.50	20.84	3.98	65.0	± 9.6 %
		Y	4.80	70.17	19.39		65.0	
		Z	5.06	71.08	19.82		65.0	
10108-CAF	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	2.62	70.93	17.46	0.00	150.0	± 9.6 %
		Y	2.33	67.66	15.42		150.0	
		Z	2.54	69.16	16.32		150.0	
10109-CAF	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	2.72	68.12	16.25	0.00	150.0	± 9.6 %
		Y	2.60	66.27	15.00		150.0	
		Z	2.74	67.17	15.61		150.0	
10110-CAF	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	2.13	70.69	17.04	0.00	150.0	± 9.6 %
		Y	1.84	66.69	14.71		150.0	
		Z	2.04	68.34	15.81		150.0	
10111-CAF	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	2.53	70.01	16.54	0.00	150.0	± 9.6 %
		Y	2.27	66.91	14.87		150.0	
		Z	2.46	68.17	15.78		150.0	

10112-CAF	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	2.85	68.17	16.30	0.00	150.0	± 9.6 %
		Y	2.73	66.39	15.11		150.0	
		Z	2.87	67.23	15.69		150.0	
10113-CAF	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	2.66	70.08	16.61	0.00	150.0	± 9.6 %
		Y	2.41	67.16	15.06		150.0	
		Z	2.61	68.36	15.92		150.0	
10114-CAC	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	X	4.89	67.34	16.74	0.00	150.0	± 9.6 %
		Y	4.90	66.78	16.20		150.0	
		Z	4.96	67.07	16.36		150.0	
10115-CAC	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	X	5.12	67.41	16.76	0.00	150.0	± 9.6 %
		Y	5.15	66.88	16.26		150.0	
		Z	5.21	67.15	16.40		150.0	
10116-CAC	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	X	4.96	67.51	16.75	0.00	150.0	± 9.6 %
		Y	4.98	66.95	16.22		150.0	
		Z	5.04	67.27	16.38		150.0	
10117-CAC	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	X	4.85	67.18	16.68	0.00	150.0	± 9.6 %
		Y	4.89	66.71	16.19		150.0	
		Z	4.95	67.03	16.35		150.0	
10118-CAC	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	X	5.21	67.66	16.89	0.00	150.0	± 9.6 %
		Y	5.23	67.11	16.39		150.0	
		Z	5.28	67.32	16.50		150.0	
10119-CAC	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	X	4.97	67.54	16.77	0.00	150.0	± 9.6 %
		Y	4.98	66.97	16.24		150.0	
		Z	5.04	67.25	16.39		150.0	
10140-CAE	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	3.18	67.90	16.33	0.00	150.0	± 9.6 %
		Y	3.10	66.53	15.31		150.0	
		Z	3.22	67.28	15.78		150.0	
10141-CAE	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	3.31	68.06	16.51	0.00	150.0	± 9.6 %
		Y	3.23	66.72	15.52		150.0	
		Z	3.35	67.43	15.97		150.0	
10142-CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	1.90	70.81	16.08	0.00	150.0	± 9.6 %
		Y	1.56	66.13	13.71		150.0	
		Z	1.79	68.21	15.15		150.0	
10143-CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	2.27	69.87	15.01	0.00	150.0	± 9.6 %
		Y	1.97	66.56	13.59		150.0	
		Z	2.26	68.57	15.01		150.0	
10144-CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	1.77	65.70	12.39	0.00	150.0	± 9.6 %
		Y	1.77	64.41	11.96		150.0	
		Z	1.97	65.88	13.14		150.0	
10145-CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	0.57	60.00	6.01	0.00	150.0	± 9.6 %
		Y	0.69	60.18	6.93		150.0	
		Z	0.84	61.95	8.70		150.0	
10146-CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	0.77	60.00	5.45	0.00	150.0	± 9.6 %
		Y	0.96	60.51	6.88		150.0	
		Z	1.21	61.91	7.88		150.0	
10147-CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	0.78	60.00	5.51	0.00	150.0	± 9.6 %
		Y	1.01	60.88	7.17		150.0	
		Z	1.29	62.52	8.30		150.0	

10149-CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	2.73	68.20	16.30	0.00	150.0	± 9.6 %
		Y	2.61	66.33	15.05		150.0	
		Z	2.75	67.23	15.66		150.0	
10150-CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	2.86	68.24	16.35	0.00	150.0	± 9.6 %
		Y	2.74	66.44	15.16		150.0	
		Z	2.87	67.28	15.73		150.0	
10151-CAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	6.63	82.27	24.05	3.98	65.0	± 9.6 %
		Y	4.86	75.26	20.73		65.0	
		Z	5.85	78.40	22.06		65.0	
10152-CAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	4.98	73.89	20.68	3.98	65.0	± 9.6 %
		Y	4.38	70.57	18.85		65.0	
		Z	4.92	72.60	19.86		65.0	
10153-CAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	5.37	75.09	21.57	3.98	65.0	± 9.6 %
		Y	4.71	71.64	19.72		65.0	
		Z	5.27	73.62	20.68		65.0	
10154-CAF	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	2.18	71.12	17.28	0.00	150.0	± 9.6 %
		Y	1.86	66.97	14.90		150.0	
		Z	2.07	68.69	16.03		150.0	
10155-CAF	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	2.54	70.08	16.58	0.00	150.0	± 9.6 %
		Y	2.28	66.95	14.90		150.0	
		Z	2.46	68.21	15.81		150.0	
10156-CAF	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	1.67	70.04	15.04	0.00	150.0	± 9.6 %
		Y	1.35	65.50	12.88		150.0	
		Z	1.61	67.93	14.60		150.0	
10157-CAF	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	1.52	65.24	11.56	0.00	150.0	± 9.6 %
		Y	1.54	64.16	11.37		150.0	
		Z	1.78	66.05	12.85		150.0	
10158-CAF	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	2.68	70.20	16.68	0.00	150.0	± 9.6 %
		Y	2.42	67.23	15.11		150.0	
		Z	2.61	68.43	15.98		150.0	
10159-CAF	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	1.57	65.38	11.65	0.00	150.0	± 9.6 %
		Y	1.59	64.37	11.51		150.0	
		Z	1.86	66.39	13.06		150.0	
10160-CAE	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	2.66	70.27	17.17	0.00	150.0	± 9.6 %
		Y	2.43	67.39	15.40		150.0	
		Z	2.59	68.51	16.14		150.0	
10161-CAE	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	2.74	68.27	16.19	0.00	150.0	± 9.6 %
		Y	2.62	66.35	14.98		150.0	
		Z	2.76	67.24	15.61		150.0	
10162-CAE	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	X	2.85	68.52	16.34	0.00	150.0	± 9.6 %
		Y	2.73	66.59	15.14		150.0	
		Z	2.87	67.46	15.76		150.0	
10166-CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	2.92	68.58	19.12	3.01	150.0	± 9.6 %
		Y	3.05	68.19	18.71		150.0	
		Z	3.38	69.92	19.37		150.0	
10167-CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	3.31	71.11	19.43	3.01	150.0	± 9.6 %
		Y	3.43	70.35	18.91		150.0	
		Z	4.27	73.87	20.20		150.0	

10168-CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	X	3.69	73.59	20.95	3.01	150.0	± 9.6 %
		Y	3.83	72.88	20.47		150.0	
		Z	4.91	76.88	21.85		150.0	
10169-CAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	2.36	66.51	18.14	3.01	150.0	± 9.6 %
		Y	2.40	66.07	17.76		150.0	
		Z	2.80	69.10	19.04		150.0	
10170-CAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	2.79	70.74	19.99	3.01	150.0	± 9.6 %
		Y	2.81	70.18	19.64		150.0	
		Z	4.13	77.05	22.20		150.0	
10171-AAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	2.40	67.71	17.55	3.01	150.0	± 9.6 %
		Y	2.40	66.93	17.03		150.0	
		Z	3.24	71.98	19.00		150.0	
10172-CAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	4.00	83.17	27.59	6.02	65.0	± 9.6 %
		Y	3.32	77.43	24.67		65.0	
		Z	4.82	85.38	27.66		65.0	
10173-CAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	7.95	95.13	29.81	6.02	65.0	± 9.6 %
		Y	5.14	85.14	25.95		65.0	
		Z	22.01	111.28	33.56		65.0	
10174-CAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	6.44	90.03	27.42	6.02	65.0	± 9.6 %
		Y	4.72	82.84	24.49		65.0	
		Z	11.40	97.81	28.98		65.0	
10175-CAF	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	2.34	66.31	17.94	3.01	150.0	± 9.6 %
		Y	2.38	65.84	17.53		150.0	
		Z	2.77	68.80	18.79		150.0	
10176-CAF	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	2.79	70.75	20.00	3.01	150.0	± 9.6 %
		Y	2.81	70.20	19.65		150.0	
		Z	4.14	77.08	22.21		150.0	
10177-CAH	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	2.35	66.39	17.99	3.01	150.0	± 9.6 %
		Y	2.39	65.94	17.60		150.0	
		Z	2.79	68.93	18.87		150.0	
10178-CAF	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	2.78	70.67	19.95	3.01	150.0	± 9.6 %
		Y	2.80	70.08	19.57		150.0	
		Z	4.10	76.88	22.11		150.0	
10179-CAF	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	2.58	69.20	18.68	3.01	150.0	± 9.6 %
		Y	2.58	68.48	18.22		150.0	
		Z	3.64	74.38	20.46		150.0	
10180-CAF	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	2.40	67.70	17.53	3.01	150.0	± 9.6 %
		Y	2.40	66.90	17.01		150.0	
		Z	3.24	71.93	18.96		150.0	
10181-CAE	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	2.35	66.38	17.99	3.01	150.0	± 9.6 %
		Y	2.39	65.93	17.60		150.0	
		Z	2.78	68.92	18.87		150.0	
10182-CAE	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	2.78	70.65	19.94	3.01	150.0	± 9.6 %
		Y	2.80	70.06	19.56		150.0	
		Z	4.09	76.85	22.10		150.0	
10183-AAD	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	2.40	67.68	17.52	3.01	150.0	± 9.6 %
		Y	2.40	66.89	16.99		150.0	
		Z	3.23	71.90	18.95		150.0	

10184-CAE	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	2.36	66.41	18.00	3.01	150.0	± 9.6 %
		Y	2.40	65.96	17.62		150.0	
		Z	2.79	68.96	18.89		150.0	
10185-CAE	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	2.79	70.71	19.97	3.01	150.0	± 9.6 %
		Y	2.81	70.12	19.59		150.0	
		Z	4.12	76.94	22.14		150.0	
10186-AAE	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	X	2.41	67.73	17.55	3.01	150.0	± 9.6 %
		Y	2.41	66.94	17.03		150.0	
		Z	3.25	71.97	18.99		150.0	
10187-CAF	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	2.37	66.48	18.09	3.01	150.0	± 9.6 %
		Y	2.40	66.03	17.69		150.0	
		Z	2.80	69.04	18.97		150.0	
10188-CAF	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	2.84	71.12	20.25	3.01	150.0	± 9.6 %
		Y	2.87	70.60	19.92		150.0	
		Z	4.27	77.69	22.54		150.0	
10189-AAF	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	2.45	68.02	17.78	3.01	150.0	± 9.6 %
		Y	2.44	67.25	17.27		150.0	
		Z	3.33	72.45	19.29		150.0	
10193-CAC	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	X	4.28	67.12	16.40	0.00	150.0	± 9.6 %
		Y	4.28	66.34	15.82		150.0	
		Z	4.37	66.69	16.05		150.0	
10194-CAC	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	X	4.40	67.30	16.54	0.00	150.0	± 9.6 %
		Y	4.42	66.58	15.96		150.0	
		Z	4.51	66.94	16.19		150.0	
10195-CAC	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	X	4.43	67.29	16.54	0.00	150.0	± 9.6 %
		Y	4.46	66.60	15.98		150.0	
		Z	4.55	66.96	16.21		150.0	
10196-CAC	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	X	4.25	67.08	16.37	0.00	150.0	± 9.6 %
		Y	4.27	66.33	15.80		150.0	
		Z	4.36	66.69	16.05		150.0	
10197-CAC	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	X	4.41	67.30	16.54	0.00	150.0	± 9.6 %
		Y	4.43	66.58	15.97		150.0	
		Z	4.52	66.95	16.20		150.0	
10198-CAC	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	X	4.42	67.28	16.54	0.00	150.0	± 9.6 %
		Y	4.45	66.60	15.98		150.0	
		Z	4.54	66.96	16.21		150.0	
10219-CAC	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	X	4.21	67.15	16.36	0.00	150.0	± 9.6 %
		Y	4.22	66.36	15.77		150.0	
		Z	4.31	66.72	16.02		150.0	
10220-CAC	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	X	4.40	67.25	16.53	0.00	150.0	± 9.6 %
		Y	4.42	66.55	15.96		150.0	
		Z	4.51	66.91	16.18		150.0	
10221-CAC	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	X	4.44	67.23	16.53	0.00	150.0	± 9.6 %
		Y	4.47	66.55	15.98		150.0	
		Z	4.56	66.90	16.20		150.0	
10222-CAC	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	X	4.84	67.21	16.68	0.00	150.0	± 9.6 %
		Y	4.86	66.70	16.17		150.0	
		Z	4.92	67.00	16.33		150.0	

10223-CAC	IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)	X	5.05	67.28	16.71	0.00	150.0	± 9.6 %
		Y	5.13	66.92	16.30		150.0	
		Z	5.19	67.21	16.45		150.0	
10224-CAC	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	X	4.88	67.36	16.68	0.00	150.0	± 9.6 %
		Y	4.89	66.80	16.15		150.0	
		Z	4.96	67.11	16.31		150.0	
10225-CAB	UMTS-FDD (HSPA+)	X	2.56	66.77	14.96	0.00	150.0	± 9.6 %
		Y	2.51	65.29	14.20		150.0	
		Z	2.64	66.08	14.88		150.0	
10226-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	8.58	96.74	30.43	6.02	65.0	± 9.6 %
		Y	5.44	86.30	26.47		65.0	
		Z	25.25	114.07	34.44		65.0	
10227-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	8.97	96.28	29.51	6.02	65.0	± 9.6 %
		Y	5.82	86.62	25.89		65.0	
		Z	26.62	112.59	33.14		65.0	
10228-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	4.46	85.84	28.72	6.02	65.0	± 9.6 %
		Y	3.52	78.94	25.38		65.0	
		Z	6.28	91.07	29.77		65.0	
10229-CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	8.00	95.21	29.84	6.02	65.0	± 9.6 %
		Y	5.18	85.25	25.99		65.0	
		Z	22.25	111.44	33.61		65.0	
10230-CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	X	8.20	94.53	28.89	6.02	65.0	± 9.6 %
		Y	5.45	85.38	25.38		65.0	
		Z	22.92	109.78	32.30		65.0	
10231-CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	4.29	84.95	28.30	6.02	65.0	± 9.6 %
		Y	3.42	78.29	25.03		65.0	
		Z	6.00	90.04	29.32		65.0	
10232-CAE	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	7.99	95.19	29.84	6.02	65.0	± 9.6 %
		Y	5.17	85.23	25.98		65.0	
		Z	22.20	111.42	33.61		65.0	
10233-CAE	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	8.17	94.46	28.87	6.02	65.0	± 9.6 %
		Y	5.43	85.32	25.36		65.0	
		Z	22.79	109.69	32.28		65.0	
10234-CAE	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	4.20	84.39	27.96	6.02	65.0	± 9.6 %
		Y	3.35	77.81	24.72		65.0	
		Z	5.81	89.24	28.92		65.0	
10235-CAE	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	8.00	95.25	29.86	6.02	65.0	± 9.6 %
		Y	5.17	85.25	25.99		65.0	
		Z	22.28	111.52	33.64		65.0	
10236-CAE	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	8.32	94.76	28.95	6.02	65.0	± 9.6 %
		Y	5.50	85.52	25.42		65.0	
		Z	23.43	110.13	32.39		65.0	
10237-CAE	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	4.29	84.99	28.32	6.02	65.0	± 9.6 %
		Y	3.42	78.29	25.04		65.0	
		Z	6.00	90.09	29.35		65.0	
10238-CAE	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	7.97	95.17	29.84	6.02	65.0	± 9.6 %
		Y	5.16	85.19	25.97		65.0	
		Z	22.13	111.39	33.60		65.0	

10239-CAE	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	8.13	94.40	28.85	6.02	65.0	± 9.6 %
		Y	5.41	85.27	25.34		65.0	
		Z	22.65	109.61	32.26		65.0	
10240-CAE	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	4.29	84.98	28.32	6.02	65.0	± 9.6 %
		Y	3.41	78.27	25.03		65.0	
		Z	5.99	90.06	29.34		65.0	
10241-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	6.78	83.01	27.19	6.98	65.0	± 9.6 %
		Y	5.79	77.77	24.62		65.0	
		Z	7.46	82.96	26.61		65.0	
10242-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	X	6.48	82.12	26.76	6.98	65.0	± 9.6 %
		Y	5.59	77.10	24.26		65.0	
		Z	6.60	80.40	25.51		65.0	
10243-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	5.17	77.50	25.78	6.98	65.0	± 9.6 %
		Y	4.73	73.67	23.57		65.0	
		Z	5.15	75.48	24.33		65.0	
10244-CAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	3.16	68.74	13.63	3.98	65.0	± 9.6 %
		Y	3.46	70.01	15.08		65.0	
		Z	4.53	73.34	16.60		65.0	
10245-CAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	3.03	67.91	13.16	3.98	65.0	± 9.6 %
		Y	3.34	69.23	14.64		65.0	
		Z	4.31	72.35	16.12		65.0	
10246-CAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	4.58	77.82	18.26	3.98	65.0	± 9.6 %
		Y	2.94	71.18	15.91		65.0	
		Z	4.43	77.10	18.78		65.0	
10247-CAE	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	3.93	72.44	16.86	3.98	65.0	± 9.6 %
		Y	3.31	69.30	15.75		65.0	
		Z	4.04	72.29	17.45		65.0	
10248-CAE	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	3.71	71.10	16.24	3.98	65.0	± 9.6 %
		Y	3.28	68.68	15.43		65.0	
		Z	3.97	71.47	17.06		65.0	
10249-CAE	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	8.97	89.85	24.39	3.98	65.0	± 9.6 %
		Y	4.14	76.51	19.58		65.0	
		Z	6.04	82.54	22.20		65.0	
10250-CAE	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	5.29	77.58	21.84	3.98	65.0	± 9.6 %
		Y	4.28	72.75	19.64		65.0	
		Z	4.96	75.21	20.85		65.0	
10251-CAE	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	4.75	74.27	19.93	3.98	65.0	± 9.6 %
		Y	4.08	70.67	18.23		65.0	
		Z	4.69	72.94	19.43		65.0	
10252-CAE	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	8.00	88.54	26.02	3.98	65.0	± 9.6 %
		Y	4.67	77.36	21.42		65.0	
		Z	6.06	81.76	23.28		65.0	
10253-CAE	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	4.92	73.55	20.33	3.98	65.0	± 9.6 %
		Y	4.33	70.27	18.60		65.0	
		Z	4.85	72.20	19.59		65.0	
10254-CAE	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	X	5.24	74.52	21.06	3.98	65.0	± 9.6 %
		Y	4.62	71.19	19.34		65.0	
		Z	5.16	73.09	20.30		65.0	

10255-CAE	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	6.21	81.24	23.74	3.98	65.0	± 9.6 %
		Y	4.64	74.55	20.56		65.0	
		Z	5.52	77.51	21.87		65.0	
10256-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	2.00	63.20	9.38	3.98	65.0	± 9.6 %
		Y	2.33	64.83	11.17		65.0	
		Z	2.92	67.15	12.48		65.0	
10257-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	1.96	62.72	8.99	3.98	65.0	± 9.6 %
		Y	2.28	64.22	10.72		65.0	
		Z	2.80	66.30	11.94		65.0	
10258-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	2.08	66.35	11.80	3.98	65.0	± 9.6 %
		Y	1.98	65.50	11.93		65.0	
		Z	2.75	69.63	14.40		65.0	
10259-CAC	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	4.58	74.93	18.91	3.98	65.0	± 9.6 %
		Y	3.71	70.81	17.27		65.0	
		Z	4.44	73.61	18.79		65.0	
10260-CAC	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	4.52	74.29	18.60	3.98	65.0	± 9.6 %
		Y	3.74	70.54	17.12		65.0	
		Z	4.45	73.22	18.60		65.0	
10261-CAC	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	7.88	87.94	24.55	3.98	65.0	± 9.6 %
		Y	4.19	76.19	20.04		65.0	
		Z	5.68	81.15	22.23		65.0	
10262-CAE	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	5.27	77.47	21.77	3.98	65.0	± 9.6 %
		Y	4.26	72.68	19.58		65.0	
		Z	4.94	75.14	20.80		65.0	
10263-CAE	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	4.75	74.24	19.92	3.98	65.0	± 9.6 %
		Y	4.08	70.65	18.22		65.0	
		Z	4.68	72.91	19.42		65.0	
10264-CAE	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	7.86	88.17	25.86	3.98	65.0	± 9.6 %
		Y	4.62	77.15	21.31		65.0	
		Z	5.99	81.52	23.16		65.0	
10265-CAE	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	4.98	73.90	20.68	3.98	65.0	± 9.6 %
		Y	4.38	70.57	18.86		65.0	
		Z	4.92	72.60	19.87		65.0	
10266-CAE	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	5.37	75.08	21.56	3.98	65.0	± 9.6 %
		Y	4.71	71.63	19.71		65.0	
		Z	5.27	73.60	20.67		65.0	
10267-CAE	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	6.61	82.19	24.01	3.98	65.0	± 9.6 %
		Y	4.85	75.21	20.70		65.0	
		Z	5.84	78.34	22.04		65.0	
10268-CAE	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	5.53	73.44	21.03	3.98	65.0	± 9.6 %
		Y	5.03	70.75	19.43		65.0	
		Z	5.54	72.47	20.25		65.0	
10269-CAE	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	5.54	73.02	20.85	3.98	65.0	± 9.6 %
		Y	5.06	70.44	19.31		65.0	
		Z	5.54	72.08	20.10		65.0	
10270-CAE	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	5.98	77.31	22.21	3.98	65.0	± 9.6 %
		Y	5.00	72.98	19.88		65.0	
		Z	5.69	75.16	20.83		65.0	

10274-CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	X	2.47	67.82	15.27	0.00	150.0	± 9.6 %
		Y	2.33	65.69	14.15		150.0	
		Z	2.48	66.63	14.91		150.0	
10275-CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	X	1.71	71.16	16.82	0.00	150.0	± 9.6 %
		Y	1.33	65.66	13.76		150.0	
		Z	1.51	67.66	15.15		150.0	
10277-CAA	PHS (QPSK)	X	1.23	59.02	4.21	9.03	50.0	± 9.6 %
		Y	1.36	59.15	4.53		50.0	
		Z	1.40	59.60	4.92		50.0	
10278-CAA	PHS (QPSK, BW 884MHz, Rolloff 0.5)	X	2.49	65.17	10.30	9.03	50.0	± 9.6 %
		Y	2.68	65.81	11.00		50.0	
		Z	3.26	68.70	12.71		50.0	
10279-CAA	PHS (QPSK, BW 884MHz, Rolloff 0.38)	X	2.55	65.39	10.49	9.03	50.0	± 9.6 %
		Y	2.76	66.08	11.22		50.0	
		Z	3.39	69.09	12.97		50.0	
10290-AAB	CDMA2000, RC1, SO55, Full Rate	X	0.66	62.54	8.32	0.00	150.0	± 9.6 %
		Y	0.76	62.40	8.87		150.0	
		Z	1.02	65.60	11.30		150.0	
10291-AAB	CDMA2000, RC3, SO55, Full Rate	X	0.43	61.50	7.46	0.00	150.0	± 9.6 %
		Y	0.48	61.03	7.79		150.0	
		Z	0.63	63.68	10.15		150.0	
10292-AAB	CDMA2000, RC3, SO32, Full Rate	X	0.68	66.33	10.22	0.00	150.0	± 9.6 %
		Y	0.54	62.59	8.99		150.0	
		Z	0.84	67.69	12.53		150.0	
10293-AAB	CDMA2000, RC3, SO3, Full Rate	X	100.00	115.49	24.39	0.00	150.0	± 9.6 %
		Y	0.69	65.22	10.79		150.0	
		Z	1.61	75.87	16.40		150.0	
10295-AAB	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	X	100.00	119.39	31.37	9.03	50.0	± 9.6 %
		Y	30.54	103.12	27.89		50.0	
		Z	25.86	103.05	28.71		50.0	
10297-AAD	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	2.64	71.06	17.54	0.00	150.0	± 9.6 %
		Y	2.34	67.75	15.49		150.0	
		Z	2.55	69.26	16.39		150.0	
10298-AAD	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	0.90	63.34	9.68	0.00	150.0	± 9.6 %
		Y	0.97	62.80	9.90		150.0	
		Z	1.20	65.31	11.89		150.0	
10299-AAD	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	1.04	61.35	7.67	0.00	150.0	± 9.6 %
		Y	1.45	63.85	10.09		150.0	
		Z	1.91	66.23	11.37		150.0	
10300-AAD	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	0.88	59.77	6.06	0.00	150.0	± 9.6 %
		Y	1.18	61.29	7.96		150.0	
		Z	1.43	62.58	8.80		150.0	
10301-AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC)	X	4.48	66.53	17.71	4.17	50.0	± 9.6 %
		Y	4.32	64.81	16.78		50.0	
		Z	4.53	65.70	17.38		50.0	
10302-AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols)	X	4.90	66.77	18.24	4.96	50.0	± 9.6 %
		Y	4.79	65.40	17.49		50.0	
		Z	4.93	65.95	17.91		50.0	

10303-AAA	IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC)	X	4.67	66.48	18.03	4.96	50.0	± 9.6 %
		Y	4.54	65.00	17.25		50.0	
		Z	4.68	65.54	17.69		50.0	
10304-AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)	X	4.50	66.44	17.58	4.17	50.0	± 9.6 %
		Y	4.37	64.94	16.79		50.0	
		Z	4.51	65.50	17.22		50.0	
10305-AAA	IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols)	X	4.12	68.45	18.95	6.02	35.0	± 9.6 %
		Y	3.86	66.02	17.96		35.0	
		Z	3.97	66.57	18.59		35.0	
10306-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols)	X	4.42	67.53	18.97	6.02	35.0	± 9.6 %
		Y	4.25	65.60	18.06		35.0	
		Z	4.36	66.03	18.53		35.0	
10307-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols)	X	4.30	67.51	18.83	6.02	35.0	± 9.6 %
		Y	4.12	65.54	17.91		35.0	
		Z	4.23	66.00	18.40		35.0	
10308-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)	X	4.29	67.78	19.02	6.02	35.0	± 9.6 %
		Y	4.09	65.70	18.03		35.0	
		Z	4.20	66.19	18.54		35.0	
10309-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols)	X	4.43	67.59	19.06	6.02	35.0	± 9.6 %
		Y	4.27	65.68	18.15		35.0	
		Z	4.39	66.15	18.64		35.0	
10310-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols)	X	4.38	67.63	18.98	6.02	35.0	± 9.6 %
		Y	4.20	65.62	18.03		35.0	
		Z	4.31	66.06	18.50		35.0	
10311-AAD	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	2.99	69.90	17.05	0.00	150.0	± 9.6 %
		Y	2.69	67.10	15.26		150.0	
		Z	2.91	68.52	16.06		150.0	
10313-AAA	iDEN 1:3	X	8.87	90.94	23.28	6.99	70.0	± 9.6 %
		Y	2.18	70.62	15.55		70.0	
		Z	3.65	77.10	18.17		70.0	
10314-AAA	iDEN 1:6	X	23.31	113.29	33.24	10.00	30.0	± 9.6 %
		Y	4.07	81.07	22.63		30.0	
		Z	6.41	89.12	25.62		30.0	
10315-AAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	X	1.06	65.07	16.25	0.17	150.0	± 9.6 %
		Y	0.98	62.35	13.91		150.0	
		Z	1.04	63.52	14.91		150.0	
10316-AAB	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)	X	4.31	67.08	16.57	0.17	150.0	± 9.6 %
		Y	4.32	66.32	15.96		150.0	
		Z	4.41	66.68	16.20		150.0	
10317-AAC	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	X	4.31	67.08	16.57	0.17	150.0	± 9.6 %
		Y	4.32	66.32	15.96		150.0	
		Z	4.41	66.68	16.20		150.0	
10400-AAD	IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)	X	4.34	67.26	16.50	0.00	150.0	± 9.6 %
		Y	4.38	66.57	15.93		150.0	
		Z	4.48	66.96	16.18		150.0	
10401-AAD	IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle)	X	5.02	66.93	16.50	0.00	150.0	± 9.6 %
		Y	5.07	66.49	16.04		150.0	
		Z	5.15	66.85	16.24		150.0	

10402-AAD	IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)	X	5.40	67.50	16.69	0.00	150.0	± 9.6 %
		Y	5.42	67.05	16.22		150.0	
		Z	5.48	67.35	16.37		150.0	
10403-AAB	CDMA2000 (1xEV-DO, Rev. 0)	X	0.66	62.54	8.32	0.00	115.0	± 9.6 %
		Y	0.76	62.40	8.87		115.0	
		Z	1.02	65.60	11.30		115.0	
10404-AAB	CDMA2000 (1xEV-DO, Rev. A)	X	0.66	62.54	8.32	0.00	115.0	± 9.6 %
		Y	0.76	62.40	8.87		115.0	
		Z	1.02	65.60	11.30		115.0	
10406-AAB	CDMA2000, RC3, SO32, SCH0, Full Rate	X	100.00	120.66	28.47	0.00	100.0	± 9.6 %
		Y	100.00	124.32	30.49		100.0	
		Z	100.00	114.36	26.36		100.0	
10410-AAE	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9, Subframe Conf=4)	X	100.00	137.18	35.87	3.23	80.0	± 9.6 %
		Y	89.20	133.87	34.99		80.0	
		Z	100.00	128.26	32.27		80.0	
10415-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	X	1.00	64.27	15.62	0.00	150.0	± 9.6 %
		Y	0.93	61.90	13.47		150.0	
		Z	0.99	62.92	14.41		150.0	
10416-AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)	X	4.26	67.05	16.46	0.00	150.0	± 9.6 %
		Y	4.28	66.33	15.89		150.0	
		Z	4.36	66.69	16.13		150.0	
10417-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	X	4.26	67.05	16.46	0.00	150.0	± 9.6 %
		Y	4.28	66.33	15.89		150.0	
		Z	4.36	66.69	16.13		150.0	
10418-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble)	X	4.26	67.30	16.55	0.00	150.0	± 9.6 %
		Y	4.27	66.52	15.94		150.0	
		Z	4.36	66.88	16.18		150.0	
10419-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble)	X	4.27	67.21	16.52	0.00	150.0	± 9.6 %
		Y	4.29	66.46	15.93		150.0	
		Z	4.38	66.82	16.17		150.0	
10422-AAB	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	X	4.37	67.16	16.52	0.00	150.0	± 9.6 %
		Y	4.40	66.45	15.96		150.0	
		Z	4.48	66.80	16.18		150.0	
10423-AAB	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	X	4.48	67.40	16.60	0.00	150.0	± 9.6 %
		Y	4.52	66.70	16.04		150.0	
		Z	4.61	67.06	16.27		150.0	
10424-AAB	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	X	4.42	67.34	16.58	0.00	150.0	± 9.6 %
		Y	4.45	66.65	16.02		150.0	
		Z	4.54	67.01	16.25		150.0	
10425-AAB	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	X	5.06	67.40	16.76	0.00	150.0	± 9.6 %
		Y	5.10	66.94	16.29		150.0	
		Z	5.16	67.23	16.44		150.0	
10426-AAB	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	X	5.11	67.63	16.87	0.00	150.0	± 9.6 %
		Y	5.13	67.07	16.35		150.0	
		Z	5.18	67.30	16.47		150.0	

10427-AAB	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	X	5.05	67.32	16.71	0.00	150.0	± 9.6 %
		Y	5.08	66.82	16.22		150.0	
		Z	5.15	67.12	16.38		150.0	
10430-AAC	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	X	4.23	73.22	18.45	0.00	150.0	± 9.6 %
		Y	3.93	70.77	17.45		150.0	
		Z	4.10	71.37	17.95		150.0	
10431-AAC	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	X	3.86	67.78	16.28	0.00	150.0	± 9.6 %
		Y	3.86	66.76	15.64		150.0	
		Z	3.98	67.24	16.01		150.0	
10432-AAC	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	X	4.18	67.53	16.50	0.00	150.0	± 9.6 %
		Y	4.20	66.69	15.89		150.0	
		Z	4.31	67.10	16.17		150.0	
10433-AAC	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	X	4.44	67.38	16.60	0.00	150.0	± 9.6 %
		Y	4.47	66.68	16.04		150.0	
		Z	4.56	67.05	16.27		150.0	
10434-AAA	W-CDMA (BS Test Model 1, 64 DPCH)	X	4.26	73.70	17.91	0.00	150.0	± 9.6 %
		Y	3.90	71.13	16.99		150.0	
		Z	4.17	72.14	17.74		150.0	
10435-AAE	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	136.85	35.71	3.23	80.0	± 9.6 %
		Y	73.85	130.75	34.24		80.0	
		Z	100.00	127.97	32.14		80.0	
10447-AAC	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	X	3.04	67.36	14.69	0.00	150.0	± 9.6 %
		Y	3.04	66.19	14.22		150.0	
		Z	3.23	67.03	14.92		150.0	
10448-AAC	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	X	3.74	67.60	16.17	0.00	150.0	± 9.6 %
		Y	3.73	66.55	15.51		150.0	
		Z	3.85	67.04	15.88		150.0	
10449-AAC	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	X	4.04	67.36	16.41	0.00	150.0	± 9.6 %
		Y	4.04	66.51	15.78		150.0	
		Z	4.14	66.92	16.07		150.0	
10450-AAC	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	X	4.25	67.17	16.47	0.00	150.0	± 9.6 %
		Y	4.27	66.44	15.88		150.0	
		Z	4.35	66.83	16.12		150.0	
10451-AAA	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	X	2.75	66.59	13.54	0.00	150.0	± 9.6 %
		Y	2.81	65.78	13.36		150.0	
		Z	3.04	66.85	14.23		150.0	
10456-AAB	IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle)	X	6.15	68.30	17.13	0.00	150.0	± 9.6 %
		Y	6.05	67.54	16.50		150.0	
		Z	6.09	67.83	16.64		150.0	
10457-AAA	UMTS-FDD (DC-HSDPA)	X	3.66	65.89	16.23	0.00	150.0	± 9.6 %
		Y	3.65	65.10	15.61		150.0	
		Z	3.71	65.42	15.85		150.0	
10458-AAA	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	X	3.20	69.58	15.19	0.00	150.0	± 9.6 %
		Y	3.29	69.02	15.37		150.0	
		Z	3.67	70.71	16.58		150.0	
10459-AAA	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	X	4.50	68.59	17.11	0.00	150.0	± 9.6 %
		Y	4.66	68.32	17.33		150.0	
		Z	4.81	68.67	17.71		150.0	

10460-AAA	UMTS-FDD (WCDMA, AMR)	X	1.26	76.31	19.76	0.00	150.0	± 9.6 %
		Y	0.71	64.73	13.42		150.0	
		Z	0.85	67.74	15.61		150.0	
10461-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	143.66	38.88	3.29	80.0	± 9.6 %
		Y	34.56	122.60	33.52		80.0	
		Z	100.00	134.99	35.38		80.0	
10462-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.61	76.64	14.82	3.23	80.0	± 9.6 %
		Y	1.01	64.66	10.84		80.0	
		Z	1.31	65.68	10.55		80.0	
10463-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.60	60.00	7.56	3.23	80.0	± 9.6 %
		Y	0.63	60.00	7.83		80.0	
		Z	0.70	60.00	7.29		80.0	
10464-AAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	140.29	37.09	3.23	80.0	± 9.6 %
		Y	41.01	122.69	32.58		80.0	
		Z	100.00	131.53	33.60		80.0	
10465-AAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	1.51	68.56	12.04	3.23	80.0	± 9.6 %
		Y	0.85	62.97	9.99		80.0	
		Z	1.06	63.78	9.68		80.0	
10466-AAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.61	60.00	7.50	3.23	80.0	± 9.6 %
		Y	0.64	60.00	7.76		80.0	
		Z	0.71	60.00	7.23		80.0	
10467-AAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	140.88	37.35	3.23	80.0	± 9.6 %
		Y	59.18	128.48	33.95		80.0	
		Z	100.00	131.99	33.80		80.0	
10468-AAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	1.90	70.77	12.88	3.23	80.0	± 9.6 %
		Y	0.89	63.46	10.25		80.0	
		Z	1.12	64.32	9.94		80.0	
10469-AAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.60	60.00	7.50	3.23	80.0	± 9.6 %
		Y	0.63	60.00	7.77		80.0	
		Z	0.70	60.00	7.23		80.0	
10470-AAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	140.97	37.38	3.23	80.0	± 9.6 %
		Y	62.06	129.24	34.12		80.0	
		Z	100.00	132.05	33.81		80.0	
10471-AAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	1.84	70.47	12.75	3.23	80.0	± 9.6 %
		Y	0.88	63.38	10.20		80.0	
		Z	1.11	64.20	9.87		80.0	
10472-AAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.60	60.00	7.48	3.23	80.0	± 9.6 %
		Y	0.63	60.00	7.75		80.0	
		Z	0.70	60.00	7.21		80.0	
10473-AAD	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	140.94	37.36	3.23	80.0	± 9.6 %
		Y	61.16	128.99	34.05		80.0	
		Z	100.00	132.00	33.79		80.0	
10474-AAD	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	1.81	70.32	12.70	3.23	80.0	± 9.6 %
		Y	0.88	63.33	10.17		80.0	
		Z	1.10	64.15	9.85		80.0	
10475-AAD	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.60	60.00	7.48	3.23	80.0	± 9.6 %
		Y	0.63	60.00	7.75		80.0	
		Z	0.70	60.00	7.21		80.0	

10477-AAE	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	1.53	68.71	12.08	3.23	80.0	± 9.6 %
		Y	0.84	62.95	9.96		80.0	
		Z	1.05	63.70	9.62		80.0	
10478-AAE	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.60	60.00	7.47	3.23	80.0	± 9.6 %
		Y	0.63	60.00	7.74		80.0	
		Z	0.70	60.00	7.20		80.0	
10479-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	131.86	35.15	3.23	80.0	± 9.6 %
		Y	12.94	98.67	26.98		80.0	
		Z	22.21	105.39	28.53		80.0	
10480-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	100.00	113.57	26.62	3.23	80.0	± 9.6 %
		Y	8.74	85.47	20.23		80.0	
		Z	17.38	92.40	21.93		80.0	
10481-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	18.06	91.55	20.55	3.23	80.0	± 9.6 %
		Y	4.37	76.08	16.65		80.0	
		Z	7.35	80.99	18.05		80.0	
10482-AAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.29	74.82	16.10	2.23	80.0	± 9.6 %
		Y	1.38	63.83	11.93		80.0	
		Z	2.24	69.89	15.23		80.0	
10483-AAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	1.50	62.45	9.85	2.23	80.0	± 9.6 %
		Y	2.04	65.44	12.22		80.0	
		Z	2.87	69.16	14.04		80.0	
10484-AAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.43	61.71	9.45	2.23	80.0	± 9.6 %
		Y	1.92	64.48	11.76		80.0	
		Z	2.62	67.82	13.47		80.0	
10485-AAD	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	6.78	86.86	22.48	2.23	80.0	± 9.6 %
		Y	1.98	67.95	15.36		80.0	
		Z	2.84	73.18	18.01		80.0	
10486-AAD	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.84	70.05	15.08	2.23	80.0	± 9.6 %
		Y	1.97	64.49	12.85		80.0	
		Z	2.60	68.12	14.98		80.0	
10487-AAD	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	2.67	68.87	14.53	2.23	80.0	± 9.6 %
		Y	1.98	64.19	12.66		80.0	
		Z	2.57	67.61	14.72		80.0	
10488-AAD	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	4.07	78.46	21.52	2.23	80.0	± 9.6 %
		Y	2.46	68.67	16.96		80.0	
		Z	3.04	71.93	18.60		80.0	
10489-AAD	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.48	71.99	18.44	2.23	80.0	± 9.6 %
		Y	2.66	66.56	15.77		80.0	
		Z	3.05	68.58	16.94		80.0	
10490-AAD	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.50	71.49	18.20	2.23	80.0	± 9.6 %
		Y	2.75	66.49	15.73		80.0	
		Z	3.12	68.41	16.86		80.0	
10491-AAD	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.72	73.90	20.02	2.23	80.0	± 9.6 %
		Y	2.82	67.95	16.90		80.0	
		Z	3.28	70.32	18.09		80.0	
10492-AAD	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.56	69.77	18.10	2.23	80.0	± 9.6 %
		Y	3.07	66.24	16.14		80.0	
		Z	3.38	67.73	16.98		80.0	

10493-AAD	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.59	69.52	17.96	2.23	80.0	± 9.6 %
		Y	3.13	66.17	16.10		80.0	
		Z	3.43	67.60	16.92		80.0	
10494-AAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	4.13	75.78	20.74	2.23	80.0	± 9.6 %
		Y	2.97	68.99	17.27		80.0	
		Z	3.53	71.74	18.59		80.0	
10495-AAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.57	69.95	18.36	2.23	80.0	± 9.6 %
		Y	3.08	66.44	16.34		80.0	
		Z	3.39	67.98	17.18		80.0	
10496-AAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.63	69.58	18.20	2.23	80.0	± 9.6 %
		Y	3.18	66.32	16.31		80.0	
		Z	3.48	67.76	17.10		80.0	
10497-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	0.86	60.00	7.83	2.23	80.0	± 9.6 %
		Y	0.94	60.00	8.43		80.0	
		Z	1.26	62.86	10.60		80.0	
10498-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	1.06	60.00	6.32	2.23	80.0	± 9.6 %
		Y	1.11	60.00	7.15		80.0	
		Z	1.15	60.00	7.79		80.0	
10499-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.09	60.00	6.13	2.23	80.0	± 9.6 %
		Y	1.13	60.00	6.98		80.0	
		Z	1.16	60.00	7.62		80.0	
10500-AAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.11	82.69	21.91	2.23	80.0	± 9.6 %
		Y	2.18	68.30	16.03		80.0	
		Z	2.89	72.51	18.19		80.0	
10501-AAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.38	72.12	16.89	2.23	80.0	± 9.6 %
		Y	2.30	65.71	14.16		80.0	
		Z	2.84	68.67	15.89		80.0	
10502-AAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.32	71.47	16.50	2.23	80.0	± 9.6 %
		Y	2.34	65.56	14.00		80.0	
		Z	2.88	68.46	15.71		80.0	
10503-AAD	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	4.00	78.15	21.38	2.23	80.0	± 9.6 %
		Y	2.43	68.50	16.86		80.0	
		Z	3.00	71.73	18.50		80.0	
10504-AAD	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.45	71.84	18.36	2.23	80.0	± 9.6 %
		Y	2.65	66.46	15.71		80.0	
		Z	3.03	68.49	16.88		80.0	
10505-AAD	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.47	71.37	18.13	2.23	80.0	± 9.6 %
		Y	2.73	66.40	15.67		80.0	
		Z	3.11	68.32	16.80		80.0	
10506-AAD	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	4.09	75.59	20.65	2.23	80.0	± 9.6 %
		Y	2.95	68.87	17.20		80.0	
		Z	3.51	71.60	18.52		80.0	
10507-AAD	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.56	69.88	18.32	2.23	80.0	± 9.6 %
		Y	3.07	66.39	16.30		80.0	
		Z	3.38	67.92	17.15		80.0	

10508-AAD	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.61	69.50	18.15	2.23	80.0	± 9.6 %
		Y	3.17	66.26	16.27		80.0	
		Z	3.46	67.69	17.06		80.0	
10509-AAD	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	4.20	72.86	19.53	2.23	80.0	± 9.6 %
		Y	3.42	68.34	17.01		80.0	
		Z	3.88	70.43	18.01		80.0	
10510-AAD	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.92	68.81	18.05	2.23	80.0	± 9.6 %
		Y	3.56	66.32	16.47		80.0	
		Z	3.85	67.60	17.14		80.0	
10511-AAD	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.98	68.57	17.95	2.23	80.0	± 9.6 %
		Y	3.64	66.21	16.45		80.0	
		Z	3.92	67.41	17.08		80.0	
10512-AAE	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	4.48	74.72	20.17	2.23	80.0	± 9.6 %
		Y	3.43	69.26	17.28		80.0	
		Z	4.02	71.84	18.48		80.0	
10513-AAE	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.82	68.98	18.16	2.23	80.0	± 9.6 %
		Y	3.45	66.38	16.51		80.0	
		Z	3.74	67.76	17.23		80.0	
10514-AAE	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.85	68.52	17.99	2.23	80.0	± 9.6 %
		Y	3.51	66.13	16.44		80.0	
		Z	3.78	67.40	17.11		80.0	
10515-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)	X	0.96	64.60	15.77	0.00	150.0	± 9.6 %
		Y	0.89	61.99	13.45		150.0	
		Z	0.95	63.08	14.46		150.0	
10516-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)	X	2.33	97.00	27.78	0.00	150.0	± 9.6 %
		Y	0.43	64.91	13.28		150.0	
		Z	0.56	69.50	16.60		150.0	
10517-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)	X	0.86	68.07	17.27	0.00	150.0	± 9.6 %
		Y	0.71	62.96	13.44		150.0	
		Z	0.79	64.75	14.96		150.0	
10518-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)	X	4.25	67.19	16.47	0.00	150.0	± 9.6 %
		Y	4.27	66.42	15.88		150.0	
		Z	4.35	66.78	16.12		150.0	
10519-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)	X	4.38	67.33	16.55	0.00	150.0	± 9.6 %
		Y	4.41	66.60	15.98		150.0	
		Z	4.50	66.96	16.21		150.0	
10520-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)	X	4.25	67.26	16.47	0.00	150.0	± 9.6 %
		Y	4.27	66.51	15.88		150.0	
		Z	4.36	66.89	16.12		150.0	
10521-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)	X	4.18	67.20	16.44	0.00	150.0	± 9.6 %
		Y	4.20	66.46	15.85		150.0	
		Z	4.29	66.86	16.10		150.0	
10522-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)	X	4.21	67.26	16.50	0.00	150.0	± 9.6 %
		Y	4.24	66.58	15.94		150.0	
		Z	4.35	66.98	16.20		150.0	

10523-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle)	X	4.18	67.45	16.52	0.00	150.0	± 9.6 %
		Y	4.18	66.58	15.86		150.0	
		Z	4.27	66.96	16.11		150.0	
10524-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle)	X	4.18	67.33	16.55	0.00	150.0	± 9.6 %
		Y	4.20	66.55	15.94		150.0	
		Z	4.30	66.94	16.19		150.0	
10525-AAB	IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle)	X	4.24	66.47	16.19	0.00	150.0	± 9.6 %
		Y	4.23	65.66	15.56		150.0	
		Z	4.32	66.04	15.81		150.0	
10526-AAB	IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle)	X	4.34	66.70	16.29	0.00	150.0	± 9.6 %
		Y	4.35	65.92	15.67		150.0	
		Z	4.45	66.33	15.93		150.0	
10527-AAB	IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle)	X	4.28	66.69	16.24	0.00	150.0	± 9.6 %
		Y	4.28	65.87	15.61		150.0	
		Z	4.38	66.29	15.86		150.0	
10528-AAB	IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle)	X	4.29	66.70	16.27	0.00	150.0	± 9.6 %
		Y	4.29	65.89	15.64		150.0	
		Z	4.39	66.31	15.90		150.0	
10529-AAB	IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle)	X	4.29	66.70	16.27	0.00	150.0	± 9.6 %
		Y	4.29	65.89	15.64		150.0	
		Z	4.39	66.31	15.90		150.0	
10531-AAB	IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle)	X	4.24	66.68	16.22	0.00	150.0	± 9.6 %
		Y	4.25	65.90	15.61		150.0	
		Z	4.36	66.34	15.88		150.0	
10532-AAB	IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle)	X	4.14	66.55	16.16	0.00	150.0	± 9.6 %
		Y	4.14	65.75	15.53		150.0	
		Z	4.24	66.20	15.81		150.0	
10533-AAB	IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle)	X	4.29	66.80	16.28	0.00	150.0	± 9.6 %
		Y	4.29	65.97	15.64		150.0	
		Z	4.40	66.39	15.90		150.0	
10534-AAB	IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle)	X	4.86	66.53	16.31	0.00	150.0	± 9.6 %
		Y	4.88	65.98	15.79		150.0	
		Z	4.95	66.32	15.97		150.0	
10535-AAB	IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle)	X	4.89	66.65	16.37	0.00	150.0	± 9.6 %
		Y	4.91	66.10	15.85		150.0	
		Z	5.00	66.46	16.03		150.0	
10536-AAB	IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle)	X	4.79	66.64	16.34	0.00	150.0	± 9.6 %
		Y	4.80	66.08	15.81		150.0	
		Z	4.89	66.46	16.01		150.0	
10537-AAB	IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle)	X	4.88	66.74	16.39	0.00	150.0	± 9.6 %
		Y	4.88	66.12	15.83		150.0	
		Z	4.95	66.44	16.00		150.0	
10538-AAB	IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle)	X	4.91	66.59	16.35	0.00	150.0	± 9.6 %
		Y	4.94	66.07	15.85		150.0	
		Z	5.01	66.41	16.03		150.0	
10540-AAB	IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle)	X	4.85	66.55	16.35	0.00	150.0	± 9.6 %
		Y	4.86	66.01	15.84		150.0	
		Z	4.94	66.38	16.03		150.0	

10541-AAB	IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle)	X	4.84	66.50	16.30	0.00	150.0	± 9.6 %
		Y	4.85	65.93	15.78		150.0	
		Z	4.93	66.29	15.97		150.0	
10542-AAB	IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle)	X	4.98	66.58	16.36	0.00	150.0	± 9.6 %
		Y	5.01	66.06	15.86		150.0	
		Z	5.08	66.39	16.04		150.0	
10543-AAB	IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle)	X	5.07	66.72	16.46	0.00	150.0	± 9.6 %
		Y	5.09	66.19	15.96		150.0	
		Z	5.15	66.45	16.09		150.0	
10544-AAB	IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)	X	5.23	66.52	16.26	0.00	150.0	± 9.6 %
		Y	5.23	66.08	15.80		150.0	
		Z	5.29	66.42	15.97		150.0	
10545-AAB	IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle)	X	5.42	67.07	16.51	0.00	150.0	± 9.6 %
		Y	5.42	66.57	16.01		150.0	
		Z	5.47	66.84	16.14		150.0	
10546-AAB	IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle)	X	5.25	66.63	16.29	0.00	150.0	± 9.6 %
		Y	5.26	66.19	15.83		150.0	
		Z	5.33	66.54	16.00		150.0	
10547-AAB	IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle)	X	5.40	66.98	16.47	0.00	150.0	± 9.6 %
		Y	5.36	66.37	15.91		150.0	
		Z	5.40	66.64	16.04		150.0	
10548-AAB	IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle)	X	5.46	67.37	16.64	0.00	150.0	± 9.6 %
		Y	5.49	66.97	16.19		150.0	
		Z	5.55	67.26	16.33		150.0	
10550-AAB	IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle)	X	5.39	67.12	16.55	0.00	150.0	± 9.6 %
		Y	5.34	66.47	15.98		150.0	
		Z	5.38	66.70	16.09		150.0	
10551-AAB	IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle)	X	5.22	66.55	16.23	0.00	150.0	± 9.6 %
		Y	5.25	66.14	15.78		150.0	
		Z	5.32	66.52	15.96		150.0	
10552-AAB	IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle)	X	5.23	66.67	16.28	0.00	150.0	± 9.6 %
		Y	5.24	66.18	15.80		150.0	
		Z	5.30	66.53	15.97		150.0	
10553-AAB	IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle)	X	5.27	66.57	16.26	0.00	150.0	± 9.6 %
		Y	5.29	66.14	15.81		150.0	
		Z	5.36	66.48	15.98		150.0	
10554-AAC	IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle)	X	5.67	66.83	16.33	0.00	150.0	± 9.6 %
		Y	5.66	66.44	15.91		150.0	
		Z	5.71	66.75	16.05		150.0	
10555-AAC	IEEE 802.11ac WiFi (160MHz, MCS1, 99pc duty cycle)	X	5.75	67.04	16.43	0.00	150.0	± 9.6 %
		Y	5.76	66.67	16.01		150.0	
		Z	5.81	66.99	16.15		150.0	
10556-AAC	IEEE 802.11ac WiFi (160MHz, MCS2, 99pc duty cycle)	X	5.82	67.26	16.53	0.00	150.0	± 9.6 %
		Y	5.80	66.81	16.07		150.0	
		Z	5.84	67.08	16.19		150.0	
10557-AAC	IEEE 802.11ac WiFi (160MHz, MCS3, 99pc duty cycle)	X	5.74	67.02	16.42	0.00	150.0	± 9.6 %
		Y	5.74	66.64	16.00		150.0	
		Z	5.80	66.96	16.15		150.0	

10558-AAC	IEEE 802.11ac WiFi (160MHz, MCS4, 99pc duty cycle)	X	5.72	66.97	16.42	0.00	150.0	± 9.6 %
		Y	5.74	66.66	16.03		150.0	
		Z	5.82	67.04	16.20		150.0	
10560-AAC	IEEE 802.11ac WiFi (160MHz, MCS6, 99pc duty cycle)	X	5.75	66.95	16.44	0.00	150.0	± 9.6 %
		Y	5.77	66.62	16.04		150.0	
		Z	5.83	66.96	16.20		150.0	
10561-AAC	IEEE 802.11ac WiFi (160MHz, MCS7, 99pc duty cycle)	X	5.69	66.96	16.48	0.00	150.0	± 9.6 %
		Y	5.71	66.62	16.07		150.0	
		Z	5.76	66.94	16.22		150.0	
10562-AAC	IEEE 802.11ac WiFi (160MHz, MCS8, 99pc duty cycle)	X	5.73	67.07	16.54	0.00	150.0	± 9.6 %
		Y	5.75	66.74	16.14		150.0	
		Z	5.82	67.12	16.31		150.0	
10563-AAC	IEEE 802.11ac WiFi (160MHz, MCS9, 99pc duty cycle)	X	5.85	67.14	16.54	0.00	150.0	± 9.6 %
		Y	5.87	66.79	16.13		150.0	
		Z	5.91	67.06	16.25		150.0	
10564-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle)	X	4.57	67.17	16.61	0.46	150.0	± 9.6 %
		Y	4.59	66.49	16.05		150.0	
		Z	4.67	66.83	16.27		150.0	
10565-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle)	X	4.74	67.55	16.90	0.46	150.0	± 9.6 %
		Y	4.78	66.90	16.38		150.0	
		Z	4.87	67.23	16.58		150.0	
10566-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle)	X	4.59	67.37	16.72	0.46	150.0	± 9.6 %
		Y	4.62	66.70	16.17		150.0	
		Z	4.71	67.05	16.39		150.0	
10567-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle)	X	4.62	67.76	17.09	0.46	150.0	± 9.6 %
		Y	4.65	67.09	16.54		150.0	
		Z	4.74	67.43	16.75		150.0	
10568-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle)	X	4.46	67.03	16.42	0.46	150.0	± 9.6 %
		Y	4.51	66.42	15.90		150.0	
		Z	4.61	66.81	16.14		150.0	
10569-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle)	X	4.63	68.10	17.29	0.46	150.0	± 9.6 %
		Y	4.63	67.31	16.68		150.0	
		Z	4.72	67.64	16.87		150.0	
10570-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle)	X	4.60	67.79	17.13	0.46	150.0	± 9.6 %
		Y	4.64	67.10	16.57		150.0	
		Z	4.73	67.44	16.77		150.0	
10571-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)	X	1.13	65.55	16.59	0.46	130.0	± 9.6 %
		Y	1.02	62.57	14.13		130.0	
		Z	1.09	63.87	15.18		130.0	
10572-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)	X	1.14	66.28	17.05	0.46	130.0	± 9.6 %
		Y	1.02	62.97	14.40		130.0	
		Z	1.10	64.37	15.52		130.0	
10573-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)	X	100.00	160.36	43.84	0.46	130.0	± 9.6 %
		Y	0.72	69.89	16.37		130.0	
		Z	1.32	80.40	21.60		130.0	
10574-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)	X	1.39	74.93	21.47	0.46	130.0	± 9.6 %
		Y	0.97	66.41	16.28		130.0	
		Z	1.14	69.27	18.15		130.0	

10575-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle)	X	4.35	66.98	16.66	0.46	130.0	± 9.6 %
		Y	4.37	66.25	16.07		130.0	
		Z	4.45	66.60	16.31		130.0	
10576-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle)	X	4.39	67.23	16.77	0.46	130.0	± 9.6 %
		Y	4.40	66.45	16.16		130.0	
		Z	4.48	66.79	16.39		130.0	
10577-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle)	X	4.53	67.43	16.90	0.46	130.0	± 9.6 %
		Y	4.55	66.69	16.31		130.0	
		Z	4.65	67.03	16.53		130.0	
10578-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle)	X	4.44	67.57	17.01	0.46	130.0	± 9.6 %
		Y	4.46	66.81	16.41		130.0	
		Z	4.55	67.16	16.63		130.0	
10579-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle)	X	4.19	66.71	16.24	0.46	130.0	± 9.6 %
		Y	4.21	65.98	15.64		130.0	
		Z	4.31	66.39	15.91		130.0	
10580-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle)	X	4.21	66.71	16.23	0.46	130.0	± 9.6 %
		Y	4.24	66.03	15.66		130.0	
		Z	4.35	66.45	15.94		130.0	
10581-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle)	X	4.37	67.75	17.05	0.46	130.0	± 9.6 %
		Y	4.37	66.88	16.38		130.0	
		Z	4.46	67.24	16.60		130.0	
10582-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle)	X	4.11	66.49	16.03	0.46	130.0	± 9.6 %
		Y	4.14	65.75	15.42		130.0	
		Z	4.24	66.16	15.70		130.0	
10583-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)	X	4.35	66.98	16.66	0.46	130.0	± 9.6 %
		Y	4.37	66.25	16.07		130.0	
		Z	4.45	66.60	16.31		130.0	
10584-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)	X	4.39	67.23	16.77	0.46	130.0	± 9.6 %
		Y	4.40	66.45	16.16		130.0	
		Z	4.48	66.79	16.39		130.0	
10585-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)	X	4.53	67.43	16.90	0.46	130.0	± 9.6 %
		Y	4.55	66.69	16.31		130.0	
		Z	4.65	67.03	16.53		130.0	
10586-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)	X	4.44	67.57	17.01	0.46	130.0	± 9.6 %
		Y	4.46	66.81	16.41		130.0	
		Z	4.55	67.16	16.63		130.0	
10587-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)	X	4.19	66.71	16.24	0.46	130.0	± 9.6 %
		Y	4.21	65.98	15.64		130.0	
		Z	4.31	66.39	15.91		130.0	
10588-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)	X	4.21	66.71	16.23	0.46	130.0	± 9.6 %
		Y	4.24	66.03	15.66		130.0	
		Z	4.35	66.45	15.94		130.0	
10589-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)	X	4.37	67.75	17.05	0.46	130.0	± 9.6 %
		Y	4.37	66.88	16.38		130.0	
		Z	4.46	67.24	16.60		130.0	
10590-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)	X	4.11	66.49	16.03	0.46	130.0	± 9.6 %
		Y	4.14	65.75	15.42		130.0	
		Z	4.24	66.16	15.70		130.0	

10591-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle)	X	4.51	67.07	16.79	0.46	130.0	± 9.6 %
		Y	4.53	66.37	16.22		130.0	
		Z	4.61	66.68	16.43		130.0	
10592-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle)	X	4.61	67.33	16.91	0.46	130.0	± 9.6 %
		Y	4.64	66.64	16.34		130.0	
		Z	4.73	66.98	16.55		130.0	
10593-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle)	X	4.53	67.22	16.77	0.46	130.0	± 9.6 %
		Y	4.56	66.51	16.19		130.0	
		Z	4.65	66.86	16.41		130.0	
10594-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle)	X	4.59	67.39	16.94	0.46	130.0	± 9.6 %
		Y	4.61	66.69	16.36		130.0	
		Z	4.70	67.03	16.57		130.0	
10595-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle)	X	4.55	67.39	16.86	0.46	130.0	± 9.6 %
		Y	4.58	66.66	16.27		130.0	
		Z	4.67	67.01	16.48		130.0	
10596-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle)	X	4.48	67.33	16.84	0.46	130.0	± 9.6 %
		Y	4.51	66.61	16.25		130.0	
		Z	4.60	66.98	16.48		130.0	
10597-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle)	X	4.44	67.19	16.68	0.46	130.0	± 9.6 %
		Y	4.46	66.47	16.09		130.0	
		Z	4.55	66.85	16.33		130.0	
10598-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle)	X	4.44	67.44	16.96	0.46	130.0	± 9.6 %
		Y	4.45	66.70	16.36		130.0	
		Z	4.54	67.07	16.59		130.0	
10599-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle)	X	5.25	67.58	17.13	0.46	130.0	± 9.6 %
		Y	5.24	66.95	16.56		130.0	
		Z	5.29	67.14	16.66		130.0	
10600-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle)	X	5.34	67.95	17.30	0.46	130.0	± 9.6 %
		Y	5.36	67.36	16.74		130.0	
		Z	5.38	67.49	16.81		130.0	
10601-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle)	X	5.27	67.81	17.24	0.46	130.0	± 9.6 %
		Y	5.25	67.09	16.62		130.0	
		Z	5.29	67.28	16.72		130.0	
10602-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle)	X	5.32	67.68	17.09	0.46	130.0	± 9.6 %
		Y	5.35	67.17	16.58		130.0	
		Z	5.40	67.38	16.69		130.0	
10603-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle)	X	5.33	67.78	17.28	0.46	130.0	± 9.6 %
		Y	5.40	67.40	16.84		130.0	
		Z	5.46	67.65	16.96		130.0	
10604-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle)	X	5.20	67.32	17.02	0.46	130.0	± 9.6 %
		Y	5.27	66.98	16.60		130.0	
		Z	5.35	67.32	16.78		130.0	
10605-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle)	X	5.29	67.63	17.19	0.46	130.0	± 9.6 %
		Y	5.33	67.16	16.69		130.0	
		Z	5.38	67.39	16.82		130.0	
10606-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle)	X	5.14	67.30	16.87	0.46	130.0	± 9.6 %
		Y	5.12	66.62	16.27		130.0	
		Z	5.16	66.82	16.38		130.0	

10607-AAB	IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle)	X	4.38	66.48	16.48	0.46	130.0	± 9.6 %
		Y	4.37	65.68	15.84		130.0	
		Z	4.46	66.03	16.07		130.0	
10608-AAB	IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle)	X	4.49	66.76	16.61	0.46	130.0	± 9.6 %
		Y	4.50	65.99	15.98		130.0	
		Z	4.60	66.37	16.22		130.0	
10609-AAB	IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle)	X	4.40	66.61	16.43	0.46	130.0	± 9.6 %
		Y	4.40	65.81	15.80		130.0	
		Z	4.50	66.21	16.04		130.0	
10610-AAB	IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle)	X	4.45	66.79	16.61	0.46	130.0	± 9.6 %
		Y	4.45	65.98	15.97		130.0	
		Z	4.55	66.37	16.21		130.0	
10611-AAB	IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle)	X	4.36	66.56	16.44	0.46	130.0	± 9.6 %
		Y	4.36	65.77	15.81		130.0	
		Z	4.46	66.17	16.06		130.0	
10612-AAB	IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle)	X	4.33	66.68	16.48	0.46	130.0	± 9.6 %
		Y	4.35	65.88	15.84		130.0	
		Z	4.45	66.30	16.10		130.0	
10613-AAB	IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle)	X	4.33	66.47	16.31	0.46	130.0	± 9.6 %
		Y	4.34	65.70	15.68		130.0	
		Z	4.45	66.12	15.94		130.0	
10614-AAB	IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle)	X	4.31	66.72	16.57	0.46	130.0	± 9.6 %
		Y	4.31	65.92	15.93		130.0	
		Z	4.41	66.33	16.19		130.0	
10615-AAB	IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle)	X	4.35	66.43	16.22	0.46	130.0	± 9.6 %
		Y	4.35	65.61	15.57		130.0	
		Z	4.46	66.02	15.84		130.0	
10616-AAB	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle)	X	5.02	66.60	16.62	0.46	130.0	± 9.6 %
		Y	5.03	66.05	16.09		130.0	
		Z	5.10	66.36	16.25		130.0	
10617-AAB	IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle)	X	5.05	66.72	16.67	0.46	130.0	± 9.6 %
		Y	5.07	66.17	16.13		130.0	
		Z	5.14	66.50	16.30		130.0	
10618-AAB	IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle)	X	4.96	66.75	16.69	0.46	130.0	± 9.6 %
		Y	4.97	66.21	16.16		130.0	
		Z	5.05	66.56	16.35		130.0	
10619-AAB	IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle)	X	5.03	66.77	16.64	0.46	130.0	± 9.6 %
		Y	5.01	66.10	16.04		130.0	
		Z	5.07	66.37	16.19		130.0	
10620-AAB	IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle)	X	5.04	66.57	16.58	0.46	130.0	± 9.6 %
		Y	5.07	66.08	16.08		130.0	
		Z	5.14	66.38	16.24		130.0	
10621-AAB	IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle)	X	5.05	66.67	16.75	0.46	130.0	± 9.6 %
		Y	5.07	66.16	16.24		130.0	
		Z	5.15	66.49	16.41		130.0	
10622-AAB	IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle)	X	5.05	66.78	16.81	0.46	130.0	± 9.6 %
		Y	5.06	66.25	16.29		130.0	
		Z	5.14	66.58	16.45		130.0	

10623-AAB	IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle)	X	4.96	66.41	16.48	0.46	130.0	± 9.6 %
		Y	4.96	65.81	15.92		130.0	
		Z	5.03	66.14	16.10		130.0	
10624-AAB	IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle)	X	5.14	66.62	16.65	0.46	130.0	± 9.6 %
		Y	5.16	66.09	16.13		130.0	
		Z	5.23	66.40	16.29		130.0	
10625-AAB	IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle)	X	5.23	66.81	16.81	0.46	130.0	± 9.6 %
		Y	5.24	66.23	16.27		130.0	
		Z	5.33	66.59	16.45		130.0	
10626-AAB	IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle)	X	5.37	66.54	16.54	0.46	130.0	± 9.6 %
		Y	5.37	66.08	16.06		130.0	
		Z	5.43	66.40	16.21		130.0	
10627-AAB	IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle)	X	5.62	67.27	16.89	0.46	130.0	± 9.6 %
		Y	5.62	66.78	16.39		130.0	
		Z	5.65	66.98	16.48		130.0	
10628-AAB	IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle)	X	5.36	66.51	16.44	0.46	130.0	± 9.6 %
		Y	5.36	66.07	15.95		130.0	
		Z	5.42	66.39	16.11		130.0	
10629-AAB	IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle)	X	5.56	67.07	16.72	0.46	130.0	± 9.6 %
		Y	5.49	66.34	16.09		130.0	
		Z	5.52	66.54	16.19		130.0	
10630-AAB	IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle)	X	5.66	67.55	16.97	0.46	130.0	± 9.6 %
		Y	5.72	67.24	16.55		130.0	
		Z	5.76	67.49	16.67		130.0	
10631-AAB	IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle)	X	5.63	67.57	17.15	0.46	130.0	± 9.6 %
		Y	5.67	67.19	16.71		130.0	
		Z	5.73	67.50	16.85		130.0	
10632-AAB	IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle)	X	5.69	67.71	17.24	0.46	130.0	± 9.6 %
		Y	5.63	66.98	16.63		130.0	
		Z	5.64	67.12	16.68		130.0	
10633-AAB	IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle)	X	5.36	66.53	16.48	0.46	130.0	± 9.6 %
		Y	5.38	66.12	16.02		130.0	
		Z	5.47	66.52	16.21		130.0	
10634-AAB	IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle)	X	5.40	66.78	16.65	0.46	130.0	± 9.6 %
		Y	5.41	66.32	16.17		130.0	
		Z	5.48	66.65	16.33		130.0	
10635-AAB	IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle)	X	5.26	66.02	16.01	0.46	130.0	± 9.6 %
		Y	5.27	65.59	15.53		130.0	
		Z	5.34	65.94	15.71		130.0	
10636-AAC	IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle)	X	5.83	66.88	16.62	0.46	130.0	± 9.6 %
		Y	5.82	66.47	16.18		130.0	
		Z	5.86	66.75	16.30		130.0	
10637-AAC	IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle)	X	5.94	67.19	16.77	0.46	130.0	± 9.6 %
		Y	5.94	66.79	16.33		130.0	
		Z	5.98	67.06	16.44		130.0	
10638-AAC	IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle)	X	6.01	67.39	16.85	0.46	130.0	± 9.6 %
		Y	5.96	66.85	16.33		130.0	
		Z	6.00	67.11	16.45		130.0	

10639-AAC	IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle)	X	5.91	67.09	16.74	0.46	130.0	± 9.6 %
		Y	5.91	66.70	16.30		130.0	
		Z	5.96	67.00	16.43		130.0	
10640-AAC	IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle)	X	5.83	66.88	16.58	0.46	130.0	± 9.6 %
		Y	5.86	66.56	16.17		130.0	
		Z	5.93	66.93	16.34		130.0	
10641-AAC	IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle)	X	5.99	67.15	16.74	0.46	130.0	± 9.6 %
		Y	5.98	66.73	16.28		130.0	
		Z	6.02	66.98	16.39		130.0	
10642-AAC	IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle)	X	5.96	67.18	16.91	0.46	130.0	± 9.6 %
		Y	5.99	66.86	16.51		130.0	
		Z	6.04	67.17	16.64		130.0	
10643-AAC	IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle)	X	5.82	66.90	16.67	0.46	130.0	± 9.6 %
		Y	5.84	66.57	16.25		130.0	
		Z	5.89	66.88	16.40		130.0	
10644-AAC	IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle)	X	5.87	67.05	16.76	0.46	130.0	± 9.6 %
		Y	5.88	66.71	16.35		130.0	
		Z	5.96	67.09	16.52		130.0	
10645-AAC	IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle)	X	6.02	67.22	16.81	0.46	130.0	± 9.6 %
		Y	6.06	66.92	16.42		130.0	
		Z	6.08	67.13	16.51		130.0	
10646-AAE	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7)	X	7.45	98.05	36.37	9.30	60.0	± 9.6 %
		Y	5.70	87.94	31.48		60.0	
		Z	10.68	104.19	37.43		60.0	
10647-AAE	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7)	X	6.28	94.10	35.07	9.30	60.0	± 9.6 %
		Y	5.09	85.56	30.67		60.0	
		Z	8.75	99.75	36.06		60.0	
10648-AAA	CDMA2000 (1x Advanced)	X	0.35	60.00	5.99	0.00	150.0	± 9.6 %
		Y	0.42	60.00	6.66		150.0	
		Z	0.51	61.64	8.47		150.0	
10652-AAC	LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	X	3.43	68.40	17.05	2.23	80.0	± 9.6 %
		Y	3.04	65.40	15.46		80.0	
		Z	3.29	66.60	16.23		80.0	
10653-AAC	LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	X	3.85	66.81	17.07	2.23	80.0	± 9.6 %
		Y	3.63	65.00	15.94		80.0	
		Z	3.82	65.84	16.44		80.0	
10654-AAC	LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	X	3.86	66.20	17.05	2.23	80.0	± 9.6 %
		Y	3.67	64.66	16.00		80.0	
		Z	3.83	65.44	16.46		80.0	
10655-AAD	LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	X	3.94	66.00	17.05	2.23	80.0	± 9.6 %
		Y	3.75	64.59	16.05		80.0	
		Z	3.91	65.37	16.49		80.0	
10658-AAA	Pulse Waveform (200Hz, 10%)	X	100.00	108.27	24.21	10.00	50.0	± 9.6 %
		Y	20.54	89.19	19.09		50.0	
		Z	100.00	106.85	23.58		50.0	
10659-AAA	Pulse Waveform (200Hz, 20%)	X	100.00	109.79	23.79	6.99	60.0	± 9.6 %
		Y	100.00	105.04	21.61		60.0	
		Z	100.00	107.25	22.69		60.0	

10660-AAA	Pulse Waveform (200Hz, 40%)	X	100.00	116.02	25.06	3.98	80.0	± 9.6 %
		Y	100.00	103.57	19.60		80.0	
		Z	100.00	110.44	22.79		80.0	
10661-AAA	Pulse Waveform (200Hz, 60%)	X	100.00	127.15	28.10	2.22	100.0	± 9.6 %
		Y	100.00	96.83	15.82		100.0	
		Z	100.00	114.65	23.34		100.0	
10662-AAA	Pulse Waveform (200Hz, 80%)	X	99.99	357.35	106.97	0.97	120.0	± 9.6 %
		Y	0.15	60.00	2.92		120.0	
		Z	100.00	114.05	21.55		120.0	

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **EX3-7490_Jan18**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:7490**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6**
Calibration procedure for dosimetric E-field probes

SCV
2/16/2018

Calibration date: **January 26, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02525)	Apr-18
Reference 20 dB Attenuator	SN: S5277 (20x)	07-Apr-17 (No. 217-02528)	Apr-18
Reference Probe ES3DV2	SN: 3013	30-Dec-17 (No. ES3-3013_Dec17)	Dec-18
DAE4	SN: 660	21-Dec-17 (No. DAE4-660_Dec17)	Dec-18
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-16)	In house check: Jun-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by:	Name Leif Klysner	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature
			Issued: January 27, 2018
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E^2 -field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Probe EX3DV4

SN:7490

Manufactured: March 20, 2017
Calibrated: January 26, 2018

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7490

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.38	0.43	0.51	$\pm 10.1 \%$
DCP (mV) ^B	98.5	97.9	95.7	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	140.0	$\pm 3.5 \%$
		Y	0.0	0.0	1.0		144.6	
		Z	0.0	0.0	1.0		139.9	

Note: For details on UID parameters see Appendix.

Sensor Model Parameters

	C1 fF	C2 fF	α V^{-1}	T1 $\text{ms} \cdot \text{V}^{-2}$	T2 $\text{ms} \cdot \text{V}^{-1}$	T3 ms	T4 V^{-2}	T5 V^{-1}	T6
X	33.66	250.6	35.51	5.627	0.000	4.997	1.696	0.036	1.006
Y	32.74	252.0	37.44	3.509	0.163	5.025	0.359	0.334	1.006
Z	37.42	282.8	36.41	7.740	0.000	5.071	0.000	0.345	1.006

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7490

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	41.9	0.89	10.38	10.38	10.38	0.43	0.85	± 12.0 %
835	41.5	0.90	10.14	10.14	10.14	0.39	0.86	± 12.0 %
1750	40.1	1.37	8.81	8.81	8.81	0.35	0.84	± 12.0 %
1900	40.0	1.40	8.52	8.52	8.52	0.30	0.85	± 12.0 %
2300	39.5	1.67	8.26	8.26	8.26	0.29	0.84	± 12.0 %
2450	39.2	1.80	7.89	7.89	7.89	0.33	0.80	± 12.0 %
2600	39.0	1.96	7.66	7.66	7.66	0.34	0.89	± 12.0 %
5250	35.9	4.71	5.46	5.46	5.46	0.35	1.80	± 13.1 %
5600	35.5	5.07	4.75	4.75	4.75	0.40	1.80	± 13.1 %
5750	35.4	5.22	4.99	4.99	4.99	0.40	1.80	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7490

Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	55.5	0.96	10.66	10.66	10.66	0.32	1.04	± 12.0 %
835	55.2	0.97	10.30	10.30	10.30	0.46	0.85	± 12.0 %
1750	53.4	1.49	8.69	8.69	8.69	0.45	0.80	± 12.0 %
1900	53.3	1.52	8.32	8.32	8.32	0.41	0.84	± 12.0 %
2300	52.9	1.81	8.09	8.09	8.09	0.35	0.90	± 12.0 %
2450	52.7	1.95	8.07	8.07	8.07	0.30	0.95	± 12.0 %
2600	52.5	2.16	7.69	7.69	7.69	0.32	0.95	± 12.0 %
5250	48.9	5.36	5.14	5.14	5.14	0.35	1.90	± 13.1 %
5600	48.5	5.77	4.21	4.21	4.21	0.40	1.90	± 13.1 %
5750	48.3	5.94	4.51	4.51	4.51	0.45	1.90	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.


Frequency Response of E-Field
(TEM-Cell:ifi110 EXX, Waveguide: R22)

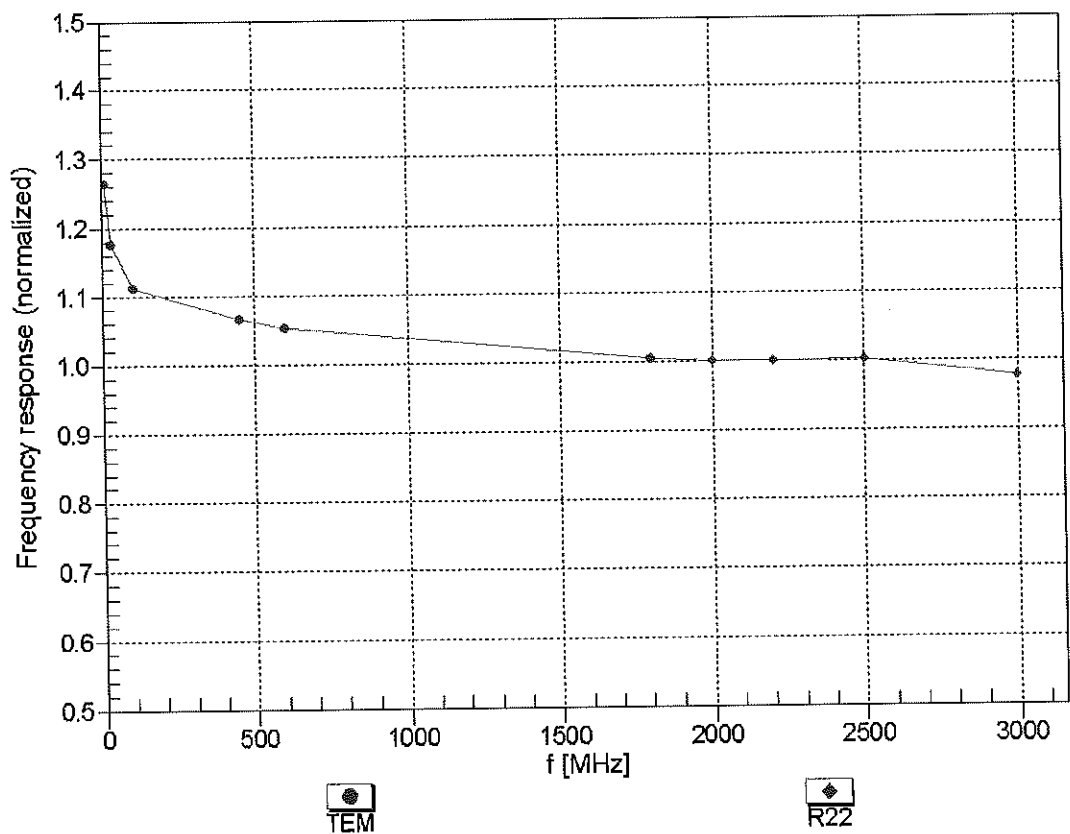



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM

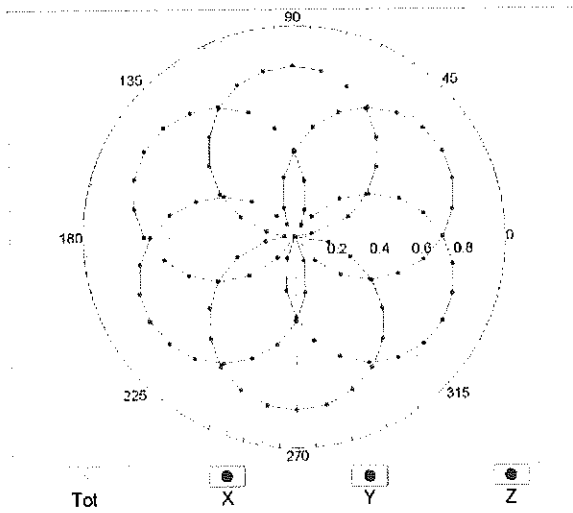


f=1800 MHz,R22

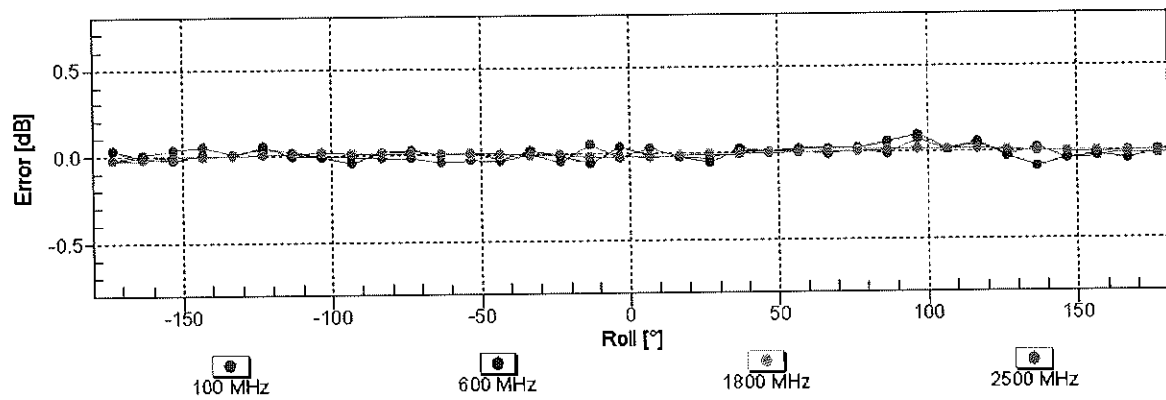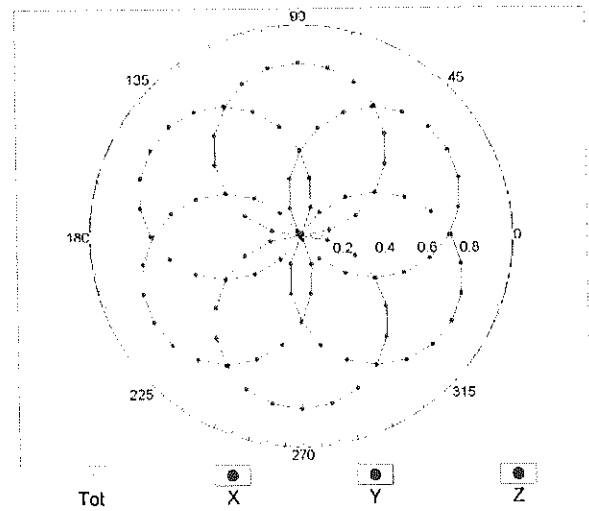


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(\text{SAR}_{\text{head}})$
(TEM cell , $f_{\text{eval}}= 1900 \text{ MHz}$)

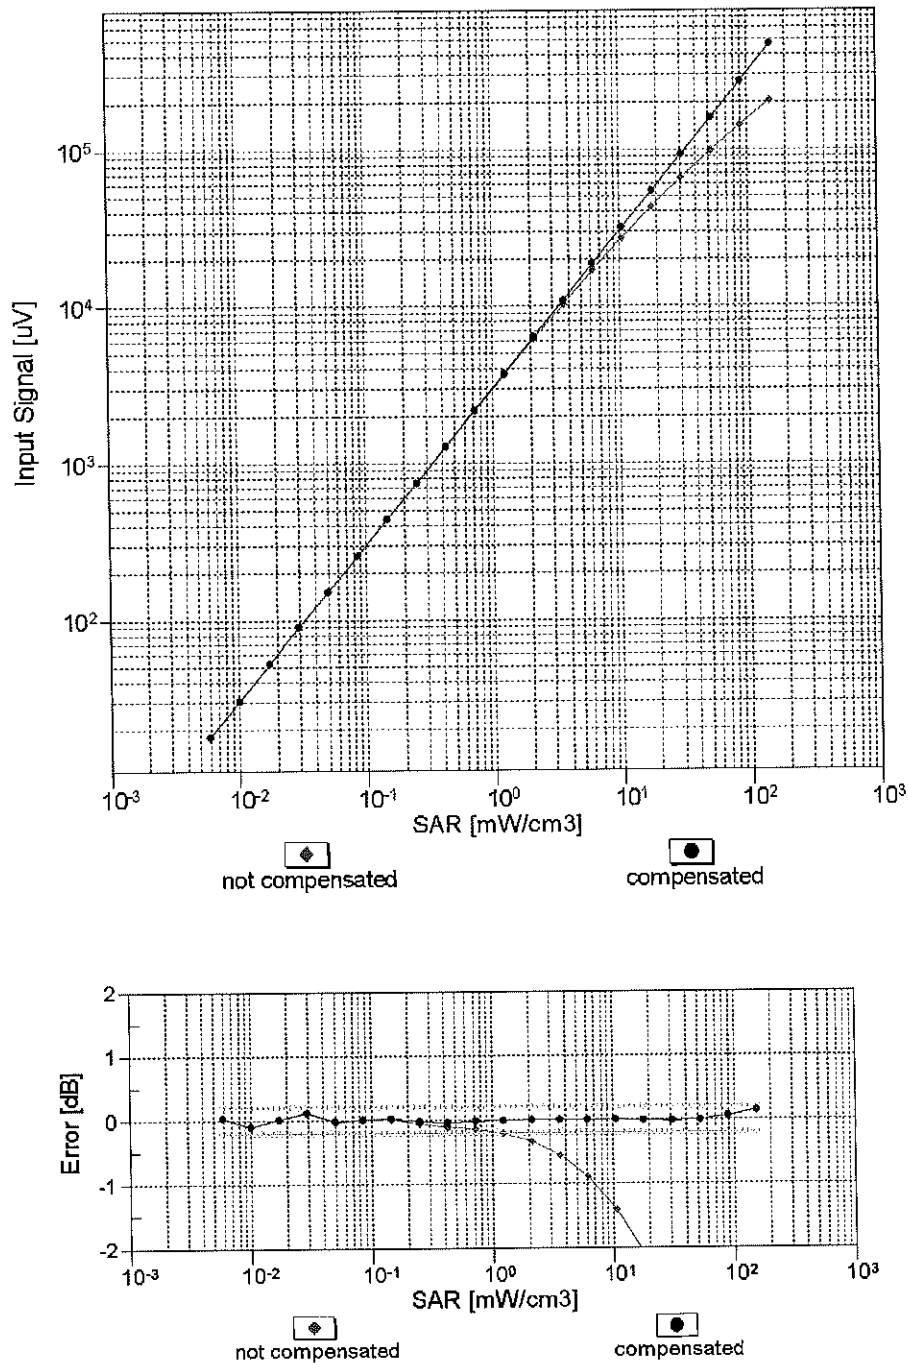



Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

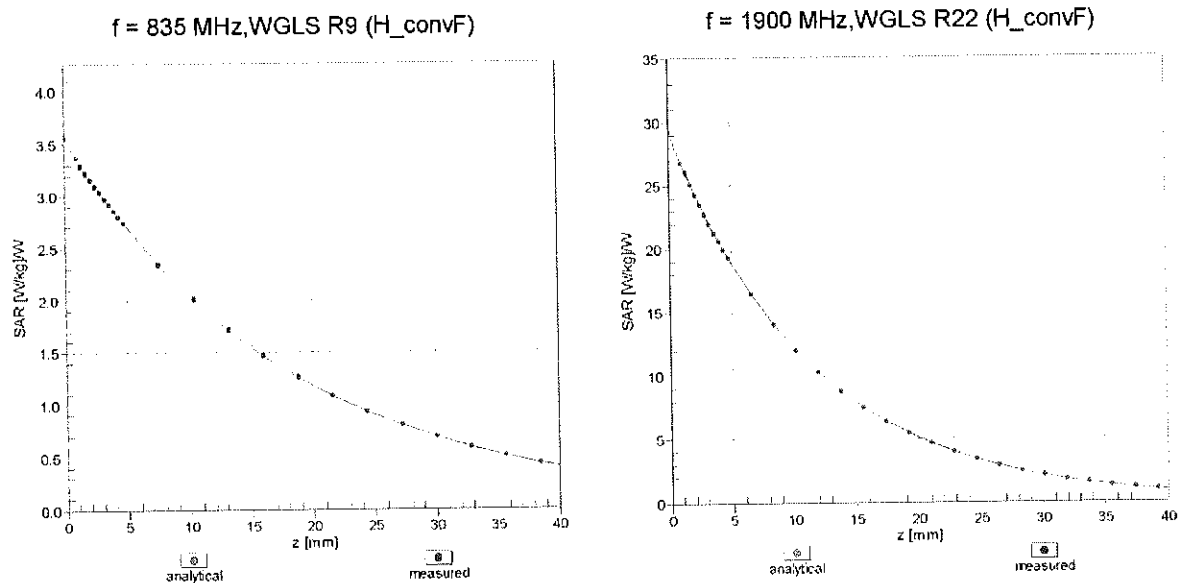

Deviation from Isotropy in Liquid

Error (ϕ , θ), $f = 900 \text{ MHz}$

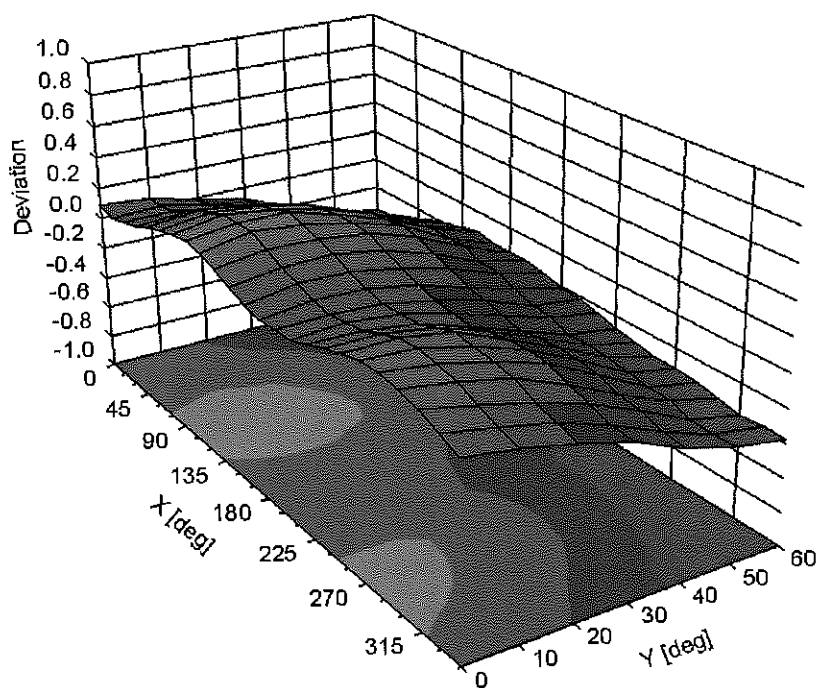

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7490

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-23.2
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Appendix: Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu V}$	C	D dB	VR mV	Max Unc ^E (k=2)
0	CW	X	0.00	0.00	1.00	0.00	140.0	$\pm 3.5 \%$
		Y	0.00	0.00	1.00		144.6	
		Z	0.00	0.00	1.00		139.9	
10010- CAA	SAR Validation (Square, 100ms, 10ms)	X	1.30	61.38	6.72	10.00	20.0	$\pm 9.6 \%$
		Y	1.36	61.26	6.75		20.0	
		Z	1.76	64.62	8.99		20.0	
10011- CAB	UMTS-FDD (WCDMA)	X	1.07	69.33	16.25	0.00	150.0	$\pm 9.6 \%$
		Y	0.80	64.87	13.07		150.0	
		Z	1.04	68.24	15.67		150.0	
10012- CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	X	1.12	63.93	15.36	0.41	150.0	$\pm 9.6 \%$
		Y	1.01	62.41	14.00		150.0	
		Z	1.14	63.88	15.40		150.0	
10013- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	X	4.61	66.70	16.96	1.46	150.0	$\pm 9.6 \%$
		Y	4.53	66.37	16.73		150.0	
		Z	4.73	66.80	17.19		150.0	
10021- DAC	GSM-FDD (TDMA, GMSK)	X	7.49	77.69	14.36	9.39	50.0	$\pm 9.6 \%$
		Y	5.81	75.44	13.94		50.0	
		Z	100.00	111.54	25.38		50.0	
10023- DAC	GPRS-FDD (TDMA, GMSK, TN 0)	X	4.68	73.01	12.78	9.57	50.0	$\pm 9.6 \%$
		Y	4.25	72.06	12.73		50.0	
		Z	100.00	110.58	25.00		50.0	
10024- DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	X	100.00	99.84	18.79	6.56	60.0	$\pm 9.6 \%$
		Y	3.28	72.62	11.75		60.0	
		Z	100.00	116.01	26.23		60.0	
10025- DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	X	4.43	75.85	29.78	12.57	50.0	$\pm 9.6 \%$
		Y	3.30	65.29	23.38		50.0	
		Z	5.60	84.24	35.07		50.0	
10026- DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	X	5.43	83.15	29.92	9.56	60.0	$\pm 9.6 \%$
		Y	4.75	79.10	27.92		60.0	
		Z	6.58	88.53	32.93		60.0	
10027- DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	X	100.00	100.52	18.40	4.80	80.0	$\pm 9.6 \%$
		Y	2.04	70.52	10.18		80.0	
		Z	100.00	123.36	28.53		80.0	
10028- DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	X	100.00	103.01	18.87	3.55	100.0	$\pm 9.6 \%$
		Y	0.51	62.95	6.58		100.0	
		Z	100.00	134.03	32.15		100.0	
10029- DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	X	3.64	73.78	24.55	7.80	80.0	$\pm 9.6 \%$
		Y	3.34	71.51	23.34		80.0	
		Z	4.18	76.95	26.59		80.0	
10030- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	X	11.26	81.95	13.83	5.30	70.0	$\pm 9.6 \%$
		Y	0.96	64.08	7.79		70.0	
		Z	100.00	115.51	25.51		70.0	
10031- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	X	100.00	93.95	14.27	1.88	100.0	$\pm 9.6 \%$
		Y	0.26	60.00	2.61		100.0	
		Z	100.00	135.95	31.13		100.0	

10032-CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	X	100.00	102.24	16.81	1.17	100.0	± 9.6 %
		Y	4.76	67.08	2.08		100.0	
		Z	100.00	163.19	40.16		100.0	
10033-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	X	5.18	82.93	20.02	5.30	70.0	± 9.6 %
		Y	3.01	75.08	16.84		70.0	
		Z	100.00	131.72	35.09		70.0	
10034-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	X	1.81	71.75	14.48	1.88	100.0	± 9.6 %
		Y	1.01	64.78	10.62		100.0	
		Z	4.79	85.13	20.46		100.0	
10035-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)	X	1.43	69.85	13.51	1.17	100.0	± 9.6 %
		Y	0.82	63.38	9.59		100.0	
		Z	2.39	76.52	17.08		100.0	
10036-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	X	7.16	87.65	21.63	5.30	70.0	± 9.6 %
		Y	3.60	77.69	17.89		70.0	
		Z	100.00	132.41	35.39		70.0	
10037-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	X	1.61	70.48	13.96	1.88	100.0	± 9.6 %
		Y	0.96	64.30	10.38		100.0	
		Z	3.86	82.45	19.58		100.0	
10038-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	X	1.44	70.22	13.81	1.17	100.0	± 9.6 %
		Y	0.82	63.53	9.79		100.0	
		Z	2.41	76.99	17.41		100.0	
10039-CAB	CDMA2000 (1xRTT, RC1)	X	1.63	71.81	14.08	0.00	150.0	± 9.6 %
		Y	0.72	62.59	8.69		150.0	
		Z	1.57	70.90	14.13		150.0	
10042-CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	X	2.07	67.31	9.84	7.78	50.0	± 9.6 %
		Y	1.57	64.78	8.79		50.0	
		Z	100.00	108.73	23.38		50.0	
10044-CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	X	0.00	103.21	1.81	0.00	150.0	± 9.6 %
		Y	0.07	121.28	6.55		150.0	
		Z	0.00	103.45	3.03		150.0	
10048-CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	X	3.46	65.63	11.10	13.80	25.0	± 9.6 %
		Y	3.94	66.46	11.85		25.0	
		Z	100.00	105.10	24.09		25.0	
10049-CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	X	3.44	68.56	11.20	10.79	40.0	± 9.6 %
		Y	3.61	68.77	11.61		40.0	
		Z	508.75	125.50	27.80		40.0	
10056-CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	X	20.84	95.60	23.61	9.03	50.0	± 9.6 %
		Y	10.74	86.04	20.65		50.0	
		Z	100.00	124.55	33.03		50.0	
10058-DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	X	3.04	70.33	22.11	6.55	100.0	± 9.6 %
		Y	2.83	68.60	21.16		100.0	
		Z	3.41	72.64	23.68		100.0	
10059-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	X	1.11	64.56	15.73	0.61	110.0	± 9.6 %
		Y	1.00	62.89	14.29		110.0	
		Z	1.15	64.80	16.00		110.0	
10060-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	X	5.53	99.95	27.34	1.30	110.0	± 9.6 %
		Y	1.31	76.58	18.46		110.0	
		Z	56.23	138.70	37.66		110.0	

10061-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	X	1.64	73.96	19.95	2.04	110.0	± 9.6 %
		Y	1.27	69.64	17.54		110.0	
		Z	2.25	79.57	22.91		110.0	
10062-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	X	4.44	66.80	16.48	0.49	100.0	± 9.6 %
		Y	4.34	66.35	16.16		100.0	
		Z	4.53	66.78	16.59		100.0	
10063-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)	X	4.45	66.86	16.55	0.72	100.0	± 9.6 %
		Y	4.35	66.43	16.24		100.0	
		Z	4.55	66.87	16.69		100.0	
10064-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)	X	4.68	67.02	16.72	0.86	100.0	± 9.6 %
		Y	4.58	66.63	16.45		100.0	
		Z	4.80	67.08	16.90		100.0	
10065-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	X	4.53	66.81	16.76	1.21	100.0	± 9.6 %
		Y	4.44	66.43	16.50		100.0	
		Z	4.66	66.94	16.99		100.0	
10066-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)	X	4.53	66.75	16.88	1.46	100.0	± 9.6 %
		Y	4.44	66.40	16.63		100.0	
		Z	4.67	66.94	17.16		100.0	
10067-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)	X	4.80	66.99	17.32	2.04	100.0	± 9.6 %
		Y	4.72	66.69	17.12		100.0	
		Z	4.96	67.20	17.65		100.0	
10068-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	X	4.81	66.84	17.44	2.55	100.0	± 9.6 %
		Y	4.74	66.57	17.27		100.0	
		Z	4.98	67.10	17.82		100.0	
10069-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	X	4.87	66.85	17.62	2.67	100.0	± 9.6 %
		Y	4.80	66.59	17.45		100.0	
		Z	5.05	67.14	18.02		100.0	
10071-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	X	4.68	66.70	17.20	1.99	100.0	± 9.6 %
		Y	4.61	66.41	17.01		100.0	
		Z	4.81	66.85	17.49		100.0	
10072-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	X	4.62	66.87	17.35	2.30	100.0	± 9.6 %
		Y	4.54	66.57	17.16		100.0	
		Z	4.76	67.10	17.70		100.0	
10073-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	X	4.65	66.98	17.64	2.83	100.0	± 9.6 %
		Y	4.59	66.71	17.47		100.0	
		Z	4.81	67.25	18.03		100.0	
10074-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	X	4.64	66.88	17.76	3.30	100.0	± 9.6 %
		Y	4.59	66.64	17.61		100.0	
		Z	4.80	67.15	18.18		100.0	
10075-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	X	4.64	66.81	17.97	3.82	90.0	± 9.6 %
		Y	4.60	66.60	17.83		90.0	
		Z	4.81	67.14	18.44		90.0	
10076-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	X	4.67	66.67	18.12	4.15	90.0	± 9.6 %
		Y	4.64	66.47	18.00		90.0	
		Z	4.84	66.97	18.60		90.0	
10077-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	X	4.70	66.75	18.23	4.30	90.0	± 9.6 %
		Y	4.67	66.56	18.11		90.0	
		Z	4.86	67.05	18.70		90.0	

10081-CAB	CDMA2000 (1xRTT, RC3)	X	0.70	65.46	10.84	0.00	150.0	± 9.6 %
		Y	0.40	60.16	6.65		150.0	
		Z	0.71	65.07	11.03		150.0	
10082-CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	X	6.88	60.12	1.56	4.77	80.0	± 9.6 %
		Y	3.08	113.02	6.82		80.0	
		Z	0.54	60.00	3.49		80.0	
10090-DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	X	100.00	99.83	18.80	6.56	60.0	± 9.6 %
		Y	3.49	73.11	11.93		60.0	
		Z	100.00	116.03	26.26		60.0	
10097-CAB	UMTS-FDD (HSDPA)	X	1.91	69.70	16.32	0.00	150.0	± 9.6 %
		Y	1.57	66.54	14.18		150.0	
		Z	1.85	68.62	15.90		150.0	
10098-CAB	UMTS-FDD (HSUPA, Subtest 2)	X	1.88	69.66	16.31	0.00	150.0	± 9.6 %
		Y	1.54	66.46	14.14		150.0	
		Z	1.81	68.58	15.88		150.0	
10099-DAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	X	5.47	83.31	29.98	9.56	60.0	± 9.6 %
		Y	4.78	79.22	27.97		60.0	
		Z	6.64	88.74	33.01		60.0	
10100-CAD	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	3.04	70.82	17.15	0.00	150.0	± 9.6 %
		Y	2.68	68.57	15.78		150.0	
		Z	3.04	70.38	16.88		150.0	
10101-CAD	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	3.12	67.72	16.13	0.00	150.0	± 9.6 %
		Y	2.93	66.55	15.31		150.0	
		Z	3.14	67.50	16.01		150.0	
10102-CAD	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	3.22	67.72	16.22	0.00	150.0	± 9.6 %
		Y	3.04	66.62	15.45		150.0	
		Z	3.24	67.48	16.09		150.0	
10103-CAD	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	4.75	73.08	19.51	3.98	65.0	± 9.6 %
		Y	4.31	71.37	18.75		65.0	
		Z	5.34	74.94	20.70		65.0	
10104-CAD	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	4.86	70.99	19.27	3.98	65.0	± 9.6 %
		Y	4.56	69.80	18.70		65.0	
		Z	5.31	72.41	20.28		65.0	
10105-CAD	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	4.59	69.61	18.91	3.98	65.0	± 9.6 %
		Y	4.33	68.48	18.36		65.0	
		Z	5.30	72.11	20.44		65.0	
10108-CAE	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	2.62	70.23	17.01	0.00	150.0	± 9.6 %
		Y	2.30	67.93	15.55		150.0	
		Z	2.63	69.73	16.73		150.0	
10109-CAE	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	2.77	67.81	16.04	0.00	150.0	± 9.6 %
		Y	2.55	66.42	15.04		150.0	
		Z	2.79	67.48	15.89		150.0	
10110-CAE	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	2.12	69.66	16.58	0.00	150.0	± 9.6 %
		Y	1.79	66.96	14.77		150.0	
		Z	2.12	69.03	16.29		150.0	
10111-CAE	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	2.56	69.45	16.43	0.00	150.0	± 9.6 %
		Y	2.23	67.20	14.90		150.0	
		Z	2.53	68.68	16.15		150.0	

10112-CAE	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	2.89	67.87	16.10	0.00	150.0	± 9.6 %
		Y	2.68	66.55	15.16		150.0	
		Z	2.91	67.51	15.95		150.0	
10113-CAE	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	2.70	69.60	16.55	0.00	150.0	± 9.6 %
		Y	2.38	67.45	15.09		150.0	
		Z	2.67	68.83	16.28		150.0	
10114-CAC	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	X	4.94	67.27	16.54	0.00	150.0	± 9.6 %
		Y	4.84	66.84	16.24		150.0	
		Z	4.99	67.16	16.49		150.0	
10115-CAC	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	X	5.18	67.31	16.55	0.00	150.0	± 9.6 %
		Y	5.08	66.91	16.28		150.0	
		Z	5.24	67.24	16.54		150.0	
10116-CAC	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	X	5.02	67.44	16.55	0.00	150.0	± 9.6 %
		Y	4.91	66.99	16.24		150.0	
		Z	5.08	67.36	16.53		150.0	
10117-CAC	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	X	4.93	67.20	16.52	0.00	150.0	± 9.6 %
		Y	4.82	66.73	16.20		150.0	
		Z	4.98	67.11	16.49		150.0	
10118-CAC	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	X	5.25	67.52	16.66	0.00	150.0	± 9.6 %
		Y	5.16	67.13	16.40		150.0	
		Z	5.32	67.43	16.64		150.0	
10119-CAC	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	X	5.02	67.46	16.57	0.00	150.0	± 9.6 %
		Y	4.92	67.02	16.27		150.0	
		Z	5.07	67.35	16.53		150.0	
10140-CAD	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	3.24	67.75	16.13	0.00	150.0	± 9.6 %
		Y	3.05	66.64	15.35		150.0	
		Z	3.27	67.51	16.01		150.0	
10141-CAD	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	3.37	67.91	16.32	0.00	150.0	± 9.6 %
		Y	3.18	66.85	15.58		150.0	
		Z	3.39	67.64	16.19		150.0	
10142-CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	1.90	69.91	15.99	0.00	150.0	± 9.6 %
		Y	1.50	66.29	13.59		150.0	
		Z	1.89	69.09	15.72		150.0	
10143-CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	2.41	70.20	15.66	0.00	150.0	± 9.6 %
		Y	1.89	66.54	13.32		150.0	
		Z	2.36	69.31	15.48		150.0	
10144-CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	1.97	66.46	13.28	0.00	150.0	± 9.6 %
		Y	1.67	64.17	11.55		150.0	
		Z	2.04	66.34	13.48		150.0	
10145-CAE	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	0.75	61.48	8.00	0.00	150.0	± 9.6 %
		Y	0.62	60.00	6.26		150.0	
		Z	0.87	62.33	9.00		150.0	
10146-CAE	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	0.96	60.52	6.46	0.00	150.0	± 9.6 %
		Y	0.79	59.19	5.28		150.0	
		Z	1.10	61.50	7.85		150.0	
10147-CAE	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	1.00	60.87	6.75	0.00	150.0	± 9.6 %
		Y	0.87	60.00	5.87		150.0	
		Z	1.17	62.08	8.27		150.0	

10149-CAD	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	2.78	67.89	16.09	0.00	150.0	± 9.6 %
		Y	2.56	66.49	15.09		150.0	
		Z	2.80	67.54	15.94		150.0	
10150-CAD	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	2.90	67.94	16.15	0.00	150.0	± 9.6 %
		Y	2.69	66.61	15.21		150.0	
		Z	2.92	67.57	16.00		150.0	
10151-CAD	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	4.93	75.72	20.65	3.98	65.0	± 9.6 %
		Y	4.39	73.70	19.75		65.0	
		Z	5.80	78.48	22.25		65.0	
10152-CAD	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	4.38	70.85	18.75	3.98	65.0	± 9.6 %
		Y	4.07	69.55	18.08		65.0	
		Z	4.87	72.51	19.96		65.0	
10153-CAD	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	4.72	71.96	19.63	3.98	65.0	± 9.6 %
		Y	4.39	70.67	19.00		65.0	
		Z	5.21	73.53	20.77		65.0	
10154-CAE	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	2.17	70.09	16.84	0.00	150.0	± 9.6 %
		Y	1.82	67.28	14.98		150.0	
		Z	2.16	69.41	16.52		150.0	
10155-CAE	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	2.56	69.50	16.47	0.00	150.0	± 9.6 %
		Y	2.24	67.25	14.93		150.0	
		Z	2.53	68.71	16.18		150.0	
10156-CAE	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	1.73	69.79	15.44	0.00	150.0	± 9.6 %
		Y	1.28	65.46	12.59		150.0	
		Z	1.71	68.96	15.24		150.0	
10157-CAE	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	1.78	66.72	12.97	0.00	150.0	± 9.6 %
		Y	1.42	63.74	10.79		150.0	
		Z	1.85	66.66	13.25		150.0	
10158-CAE	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	2.71	69.70	16.61	0.00	150.0	± 9.6 %
		Y	2.38	67.54	15.14		150.0	
		Z	2.68	68.92	16.34		150.0	
10159-CAE	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	1.87	67.08	13.18	0.00	150.0	± 9.6 %
		Y	1.47	63.90	10.91		150.0	
		Z	1.94	67.02	13.47		150.0	
10160-CAD	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	2.65	69.49	16.75	0.00	150.0	± 9.6 %
		Y	2.39	67.64	15.48		150.0	
		Z	2.67	69.05	16.53		150.0	
10161-CAD	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	2.79	67.95	16.04	0.00	150.0	± 9.6 %
		Y	2.57	66.52	15.01		150.0	
		Z	2.81	67.55	15.89		150.0	
10162-CAD	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	X	2.91	68.19	16.19	0.00	150.0	± 9.6 %
		Y	2.68	66.78	15.17		150.0	
		Z	2.92	67.77	16.03		150.0	
10166-CAE	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	3.23	69.89	19.51	3.01	150.0	± 9.6 %
		Y	2.97	68.07	18.40		150.0	
		Z	3.16	68.64	18.88		150.0	
10167-CAE	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	4.06	74.10	20.46	3.01	150.0	± 9.6 %
		Y	3.41	70.43	18.61		150.0	
		Z	3.61	70.97	19.14		150.0	

10168-CAE	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	X	4.79	77.69	22.39	3.01	150.0	± 9.6 %
		Y	3.86	73.18	20.27		150.0	
		Z	4.00	73.28	20.55		150.0	
10169-CAD	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	2.65	68.83	19.08	3.01	150.0	± 9.6 %
		Y	2.42	66.35	17.57		150.0	
		Z	2.48	66.66	18.01		150.0	
10170-CAD	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	3.94	77.56	22.69	3.01	150.0	± 9.6 %
		Y	2.98	71.07	19.60		150.0	
		Z	2.96	70.89	19.86		150.0	
10171-AAD	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	3.01	71.85	19.13	3.01	150.0	± 9.6 %
		Y	2.49	67.37	16.80		150.0	
		Z	2.54	67.79	17.41		150.0	
10172-CAD	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	3.09	77.18	23.93	6.02	65.0	± 9.6 %
		Y	2.65	72.77	21.74		65.0	
		Z	4.43	83.46	27.06		65.0	
10173-CAD	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	8.11	93.39	27.54	6.02	65.0	± 9.6 %
		Y	4.11	79.67	22.66		65.0	
		Z	7.30	91.11	27.85		65.0	
10174-CAD	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	4.84	83.58	23.61	6.02	65.0	± 9.6 %
		Y	3.17	74.79	20.20		65.0	
		Z	6.98	89.22	26.55		65.0	
10175-CAE	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	2.62	68.51	18.82	3.01	150.0	± 9.6 %
		Y	2.39	66.09	17.33		150.0	
		Z	2.45	66.44	17.80		150.0	
10176-CAE	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	3.95	77.59	22.70	3.01	150.0	± 9.6 %
		Y	2.99	71.09	19.61		150.0	
		Z	2.96	70.91	19.87		150.0	
10177-CAG	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	2.64	68.64	18.90	3.01	150.0	± 9.6 %
		Y	2.41	66.20	17.40		150.0	
		Z	2.47	66.55	17.87		150.0	
10178-CAE	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	3.91	77.38	22.59	3.01	150.0	± 9.6 %
		Y	2.97	70.96	19.53		150.0	
		Z	2.95	70.79	19.80		150.0	
10179-CAE	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	3.43	74.55	20.76	3.01	150.0	± 9.6 %
		Y	2.70	69.07	18.05		150.0	
		Z	2.73	69.31	18.54		150.0	
10180-CAE	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	3.01	71.80	19.09	3.01	150.0	± 9.6 %
		Y	2.49	67.34	16.77		150.0	
		Z	2.54	67.77	17.38		150.0	
10181-CAD	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	2.63	68.63	18.90	3.01	150.0	± 9.6 %
		Y	2.40	66.18	17.39		150.0	
		Z	2.47	66.53	17.87		150.0	
10182-CAD	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	3.90	77.35	22.58	3.01	150.0	± 9.6 %
		Y	2.97	70.94	19.52		150.0	
		Z	2.94	70.77	19.79		150.0	
10183-AAC	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	3.00	71.77	19.08	3.01	150.0	± 9.6 %
		Y	2.48	67.32	16.76		150.0	
		Z	2.53	67.75	17.37		150.0	

10184-CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	2.64	68.67	18.92	3.01	150.0	± 9.6 %
		Y	2.41	66.22	17.41		150.0	
		Z	2.47	66.57	17.88		150.0	
10185-CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	3.93	77.44	22.63	3.01	150.0	± 9.6 %
		Y	2.98	71.01	19.56		150.0	
		Z	2.95	70.83	19.82		150.0	
10186-AAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	X	3.02	71.85	19.12	3.01	150.0	± 9.6 %
		Y	2.49	67.37	16.80		150.0	
		Z	2.55	67.80	17.41		150.0	
10187-CAE	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	2.65	68.76	19.01	3.01	150.0	± 9.6 %
		Y	2.42	66.30	17.50		150.0	
		Z	2.48	66.62	17.96		150.0	
10188-CAE	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	4.09	78.30	23.08	3.01	150.0	± 9.6 %
		Y	3.06	71.55	19.91		150.0	
		Z	3.02	71.28	20.12		150.0	
10189-AAE	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	3.10	72.37	19.45	3.01	150.0	± 9.6 %
		Y	2.54	67.70	17.04		150.0	
		Z	2.59	68.11	17.64		150.0	
10193-CAC	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	X	4.35	66.99	16.25	0.00	150.0	± 9.6 %
		Y	4.22	66.44	15.84		150.0	
		Z	4.40	66.77	16.20		150.0	
10194-CAC	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	X	4.49	67.21	16.39	0.00	150.0	± 9.6 %
		Y	4.36	66.66	15.98		150.0	
		Z	4.54	67.03	16.33		150.0	
10195-CAC	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	X	4.52	67.22	16.40	0.00	150.0	± 9.6 %
		Y	4.39	66.67	16.00		150.0	
		Z	4.58	67.05	16.35		150.0	
10196-CAC	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	X	4.33	66.98	16.24	0.00	150.0	± 9.6 %
		Y	4.20	66.42	15.82		150.0	
		Z	4.38	66.78	16.19		150.0	
10197-CAC	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	X	4.49	67.21	16.39	0.00	150.0	± 9.6 %
		Y	4.36	66.66	15.99		150.0	
		Z	4.55	67.04	16.34		150.0	
10198-CAC	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	X	4.51	67.21	16.40	0.00	150.0	± 9.6 %
		Y	4.38	66.66	16.00		150.0	
		Z	4.57	67.05	16.35		150.0	
10219-CAC	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	X	4.29	67.03	16.22	0.00	150.0	± 9.6 %
		Y	4.16	66.45	15.79		150.0	
		Z	4.34	66.82	16.16		150.0	
10220-CAC	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	X	4.49	67.17	16.38	0.00	150.0	± 9.6 %
		Y	4.36	66.62	15.98		150.0	
		Z	4.54	67.00	16.33		150.0	
10221-CAC	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	X	4.53	67.16	16.38	0.00	150.0	± 9.6 %
		Y	4.40	66.62	15.99		150.0	
		Z	4.59	66.99	16.34		150.0	
10222-CAC	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	X	4.90	67.19	16.51	0.00	150.0	± 9.6 %
		Y	4.80	66.73	16.19		150.0	
		Z	4.95	67.08	16.47		150.0	

10223-CAC	IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)	X	5.15	67.35	16.59	0.00	150.0	± 9.6 %
		Y	5.04	66.90	16.29		150.0	
		Z	5.23	67.30	16.59		150.0	
10224-CAC	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	X	4.94	67.32	16.49	0.00	150.0	± 9.6 %
		Y	4.84	66.85	16.18		150.0	
		Z	4.99	67.19	16.45		150.0	
10225-CAB	UMTS-FDD (HSPA+)	X	2.65	66.67	15.13	0.00	150.0	± 9.6 %
		Y	2.45	65.38	14.09		150.0	
		Z	2.68	66.33	15.12		150.0	
10226-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	8.97	95.35	28.27	6.02	65.0	± 9.6 %
		Y	4.33	80.66	23.14		65.0	
		Z	7.76	92.38	28.37		65.0	
10227-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	8.96	93.62	26.86	6.02	65.0	± 9.6 %
		Y	4.31	79.75	22.11		65.0	
		Z	8.28	92.27	27.60		65.0	
10228-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	3.86	81.76	25.80	6.02	65.0	± 9.6 %
		Y	3.08	76.03	23.21		65.0	
		Z	4.55	84.23	27.42		65.0	
10229-CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	8.19	93.54	27.59	6.02	65.0	± 9.6 %
		Y	4.14	79.76	22.70		65.0	
		Z	7.36	91.22	27.89		65.0	
10230-CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	X	8.05	91.72	26.18	6.02	65.0	± 9.6 %
		Y	4.08	78.80	21.68		65.0	
		Z	7.72	90.93	27.09		65.0	
10231-CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	3.72	80.95	25.40	6.02	65.0	± 9.6 %
		Y	2.99	75.41	22.87		65.0	
		Z	4.40	83.49	27.05		65.0	
10232-CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	8.17	93.51	27.58	6.02	65.0	± 9.6 %
		Y	4.13	79.74	22.70		65.0	
		Z	7.34	91.20	27.89		65.0	
10233-CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	8.01	91.66	26.17	6.02	65.0	± 9.6 %
		Y	4.07	78.76	21.67		65.0	
		Z	7.69	90.88	27.07		65.0	
10234-CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	3.62	80.33	25.03	6.02	65.0	± 9.6 %
		Y	2.93	74.93	22.55		65.0	
		Z	4.30	82.93	26.72		65.0	
10235-CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	8.18	93.56	27.60	6.02	65.0	± 9.6 %
		Y	4.13	79.76	22.71		65.0	
		Z	7.35	91.23	27.90		65.0	
10236-CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	8.16	91.92	26.24	6.02	65.0	± 9.6 %
		Y	4.11	78.89	21.71		65.0	
		Z	7.81	91.12	27.14		65.0	
10237-CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	3.72	80.97	25.41	6.02	65.0	± 9.6 %
		Y	2.99	75.41	22.88		65.0	
		Z	4.40	83.52	27.07		65.0	
10238-CAD	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	8.15	93.48	27.57	6.02	65.0	± 9.6 %
		Y	4.12	79.72	22.69		65.0	
		Z	7.32	91.17	27.88		65.0	

10239-CAD	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	7.97	91.59	26.15	6.02	65.0	± 9.6 %
		Y	4.05	78.73	21.66		65.0	
		Z	7.65	90.82	27.06		65.0	
10240-CAD	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	3.71	80.95	25.40	6.02	65.0	± 9.6 %
		Y	2.98	75.39	22.87		65.0	
		Z	4.39	83.49	27.06		65.0	
10241-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	6.24	80.12	25.14	6.98	65.0	± 9.6 %
		Y	5.51	76.83	23.64		65.0	
		Z	6.38	79.49	25.31		65.0	
10242-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	X	5.45	77.39	23.94	6.98	65.0	± 9.6 %
		Y	4.93	74.62	22.60		65.0	
		Z	6.31	79.33	25.17		65.0	
10243-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	4.48	73.31	23.04	6.98	65.0	± 9.6 %
		Y	4.23	71.61	22.11		65.0	
		Z	5.20	75.66	24.50		65.0	
10244-CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	2.93	67.44	12.99	3.98	65.0	± 9.6 %
		Y	2.52	65.44	11.86		65.0	
		Z	4.06	72.11	16.24		65.0	
10245-CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	2.87	66.90	12.67	3.98	65.0	± 9.6 %
		Y	2.49	65.07	11.61		65.0	
		Z	3.90	71.23	15.78		65.0	
10246-CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	2.72	70.00	14.89	3.98	65.0	± 9.6 %
		Y	2.19	67.13	13.26		65.0	
		Z	4.56	77.87	19.22		65.0	
10247-CAD	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	3.19	68.83	15.13	3.98	65.0	± 9.6 %
		Y	2.82	67.06	14.04		65.0	
		Z	4.03	72.45	17.65		65.0	
10248-CAD	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	3.16	68.24	14.84	3.98	65.0	± 9.6 %
		Y	2.82	66.62	13.82		65.0	
		Z	3.95	71.59	17.23		65.0	
10249-CAD	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	4.06	76.13	18.98	3.98	65.0	± 9.6 %
		Y	3.23	72.62	17.29		65.0	
		Z	6.18	83.32	22.65		65.0	
10250-CAD	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	4.28	72.95	19.42	3.98	65.0	± 9.6 %
		Y	3.89	71.35	18.59		65.0	
		Z	4.91	75.22	21.00		65.0	
10251-CAD	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	4.06	70.80	18.00	3.98	65.0	± 9.6 %
		Y	3.72	69.35	17.20		65.0	
		Z	4.65	72.93	19.55		65.0	
10252-CAD	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	4.77	77.84	21.28	3.98	65.0	± 9.6 %
		Y	4.06	75.12	20.05		65.0	
		Z	6.05	82.06	23.56		65.0	
10253-CAD	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	4.33	70.53	18.48	3.98	65.0	± 9.6 %
		Y	4.03	69.28	17.81		65.0	
		Z	4.80	72.11	19.68		65.0	
10254-CAD	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	X	4.62	71.47	19.22	3.98	65.0	± 9.6 %
		Y	4.30	70.23	18.58		65.0	
		Z	5.10	73.01	20.39		65.0	

10255-CAD	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	4.70	75.01	20.49	3.98	65.0	± 9.6 %
		Y	4.21	73.10	19.60		65.0	
		Z	5.47	77.56	22.05		65.0	
10256-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	2.00	63.07	9.38	3.98	65.0	± 9.6 %
		Y	1.82	62.08	8.70		65.0	
		Z	2.71	66.50	12.29		65.0	
10257-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	1.98	62.69	9.07	3.98	65.0	± 9.6 %
		Y	1.82	61.80	8.44		65.0	
		Z	2.62	65.73	11.78		65.0	
10258-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	1.80	64.39	10.86	3.98	65.0	± 9.6 %
		Y	1.55	62.79	9.69		65.0	
		Z	2.78	69.99	14.67		65.0	
10259-CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	3.63	70.60	16.80	3.98	65.0	± 9.6 %
		Y	3.24	68.82	15.77		65.0	
		Z	4.42	73.73	18.97		65.0	
10260-CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	3.66	70.33	16.66	3.98	65.0	± 9.6 %
		Y	3.28	68.62	15.67		65.0	
		Z	4.42	73.33	18.77		65.0	
10261-CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	4.19	76.23	19.65	3.98	65.0	± 9.6 %
		Y	3.47	73.21	18.20		65.0	
		Z	5.72	81.65	22.59		65.0	
10262-CAD	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	4.26	72.87	19.36	3.98	65.0	± 9.6 %
		Y	3.88	71.27	18.53		65.0	
		Z	4.89	75.15	20.95		65.0	
10263-CAD	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	4.05	70.78	17.99	3.98	65.0	± 9.6 %
		Y	3.71	69.33	17.19		65.0	
		Z	4.64	72.90	19.54		65.0	
10264-CAD	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	4.72	77.62	21.16	3.98	65.0	± 9.6 %
		Y	4.02	74.92	19.94		65.0	
		Z	5.98	81.81	23.44		65.0	
10265-CAD	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	4.38	70.85	18.75	3.98	65.0	± 9.6 %
		Y	4.07	69.56	18.09		65.0	
		Z	4.86	72.52	19.96		65.0	
10266-CAD	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	4.72	71.94	19.62	3.98	65.0	± 9.6 %
		Y	4.39	70.66	18.99		65.0	
		Z	5.21	73.51	20.76		65.0	
10267-CAD	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	4.92	75.67	20.62	3.98	65.0	± 9.6 %
		Y	4.38	73.66	19.73		65.0	
		Z	5.79	78.42	22.22		65.0	
10268-CAD	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	5.04	71.06	19.37	3.98	65.0	± 9.6 %
		Y	4.74	69.93	18.83		65.0	
		Z	5.47	72.35	20.32		65.0	
10269-CAD	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	5.06	70.75	19.25	3.98	65.0	± 9.6 %
		Y	4.78	69.67	18.73		65.0	
		Z	5.47	71.94	20.16		65.0	
10270-CAD	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	5.04	73.34	19.81	3.98	65.0	± 9.6 %
		Y	4.64	71.89	19.16		65.0	
		Z	5.63	75.11	20.95		65.0	

10274-CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	X	2.52	67.44	15.29	0.00	150.0	± 9.6 %
		Y	2.28	65.85	14.08		150.0	
		Z	2.53	66.97	15.19		150.0	
10275-CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	X	1.63	69.47	16.18	0.00	150.0	± 9.6 %
		Y	1.30	65.99	13.81		150.0	
		Z	1.59	68.58	15.77		150.0	
10277-CAA	PHS (QPSK)	X	1.20	58.39	3.55	9.03	50.0	± 9.6 %
		Y	1.26	58.24	3.51		50.0	
		Z	1.38	59.54	4.87		50.0	
10278-CAA	PHS (QPSK, BW 884MHz, Rolloff 0.5)	X	2.20	63.49	9.08	9.03	50.0	± 9.6 %
		Y	2.21	63.12	8.88		50.0	
		Z	3.27	68.81	12.79		50.0	
10279-CAA	PHS (QPSK, BW 884MHz, Rolloff 0.38)	X	2.27	63.71	9.28	9.03	50.0	± 9.6 %
		Y	2.27	63.32	9.05		50.0	
		Z	3.39	69.21	13.05		50.0	
10290-AAB	CDMA2000, RC1, SO55, Full Rate	X	1.05	66.66	11.52	0.00	150.0	± 9.6 %
		Y	0.63	61.33	7.71		150.0	
		Z	1.13	66.86	12.02		150.0	
10291-AAB	CDMA2000, RC3, SO55, Full Rate	X	0.68	65.18	10.68	0.00	150.0	± 9.6 %
		Y	0.40	60.08	6.58		150.0	
		Z	0.69	64.84	10.89		150.0	
10292-AAB	CDMA2000, RC3, SO32, Full Rate	X	1.44	74.60	15.13	0.00	150.0	± 9.6 %
		Y	0.44	61.36	7.62		150.0	
		Z	1.08	70.90	14.10		150.0	
10293-AAB	CDMA2000, RC3, SO3, Full Rate	X	69.01	121.41	28.35	0.00	150.0	± 9.6 %
		Y	0.57	63.80	9.38		150.0	
		Z	3.40	85.62	19.92		150.0	
10295-AAB	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	X	15.39	90.94	23.40	9.03	50.0	± 9.6 %
		Y	17.24	91.15	23.06		50.0	
		Z	35.42	108.35	30.23		50.0	
10297-AAC	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	2.64	70.35	17.09	0.00	150.0	± 9.6 %
		Y	2.31	68.03	15.62		150.0	
		Z	2.64	69.84	16.80		150.0	
10298-AAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	1.20	66.02	11.99	0.00	150.0	± 9.6 %
		Y	0.86	62.07	9.02		150.0	
		Z	1.28	66.19	12.45		150.0	
10299-AAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	1.59	64.75	10.12	0.00	150.0	± 9.6 %
		Y	1.18	61.73	8.13		150.0	
		Z	1.67	65.30	11.18		150.0	
10300-AAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	1.20	61.54	7.71	0.00	150.0	± 9.6 %
		Y	1.01	60.14	6.56		150.0	
		Z	1.31	62.07	8.73		150.0	
10301-AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC)	X	4.21	64.89	16.97	4.17	50.0	± 9.6 %
		Y	4.15	64.63	16.63		50.0	
		Z	4.50	65.53	17.37		50.0	
10302-AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols)	X	4.65	65.38	17.63	4.96	50.0	± 9.6 %
		Y	4.61	65.15	17.30		50.0	
		Z	4.94	65.98	18.01		50.0	

10303-AAA	IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC)	X	4.40	64.95	17.38	4.96	50.0	± 9.6 %
		Y	4.39	65.01	17.24		50.0	
		Z	4.69	65.57	17.78		50.0	
10304-AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)	X	4.26	65.04	17.00	4.17	50.0	± 9.6 %
		Y	4.20	64.74	16.63		50.0	
		Z	4.53	65.54	17.33		50.0	
10305-AAA	IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols)	X	3.58	65.04	17.61	6.02	35.0	± 9.6 %
		Y	3.64	65.42	17.43		35.0	
		Z	3.97	66.58	18.67		35.0	
10306-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols)	X	4.03	64.90	17.80	6.02	35.0	± 9.6 %
		Y	4.06	65.14	17.65		35.0	
		Z	4.37	66.04	18.62		35.0	
10307-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols)	X	3.89	64.80	17.64	6.02	35.0	± 9.6 %
		Y	3.93	65.06	17.49		35.0	
		Z	4.23	66.01	18.49		35.0	
10308-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)	X	3.86	64.93	17.76	6.02	35.0	± 9.6 %
		Y	3.90	65.20	17.61		35.0	
		Z	4.21	66.20	18.63		35.0	
10309-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols)	X	4.04	64.95	17.88	6.02	35.0	± 9.6 %
		Y	4.07	65.19	17.74		35.0	
		Z	4.39	66.16	18.72		35.0	
10310-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols)	X	3.97	64.90	17.76	6.02	35.0	± 9.6 %
		Y	4.01	65.16	17.63		35.0	
		Z	4.31	66.07	18.58		35.0	
10311-AAC	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	3.01	69.47	16.69	0.00	150.0	± 9.6 %
		Y	2.66	67.33	15.38		150.0	
		Z	3.00	69.03	16.42		150.0	
10313-AAA	iDEN 1:3	X	2.07	69.72	14.65	6.99	70.0	± 9.6 %
		Y	1.61	66.56	13.04		70.0	
		Z	3.81	78.35	18.85		70.0	
10314-AAA	iDEN 1:6	X	3.85	79.81	21.60	10.00	30.0	± 9.6 %
		Y	2.89	74.52	19.24		30.0	
		Z	7.16	91.65	26.67		30.0	
10315-AAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	X	1.06	64.14	15.47	0.17	150.0	± 9.6 %
		Y	0.94	62.45	13.94		150.0	
		Z	1.06	63.90	15.35		150.0	
10316-AAB	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)	X	4.35	66.82	16.28	0.17	150.0	± 9.6 %
		Y	4.24	66.33	15.92		150.0	
		Z	4.43	66.77	16.34		150.0	
10317-AAC	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	X	4.35	66.82	16.28	0.17	150.0	± 9.6 %
		Y	4.24	66.33	15.92		150.0	
		Z	4.43	66.77	16.34		150.0	
10400-AAD	IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)	X	4.44	67.19	16.35	0.00	150.0	± 9.6 %
		Y	4.31	66.63	15.94		150.0	
		Z	4.51	67.06	16.32		150.0	
10401-AAD	IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle)	X	5.10	66.92	16.33	0.00	150.0	± 9.6 %
		Y	4.99	66.46	16.03		150.0	
		Z	5.19	66.94	16.38		150.0	

10402-AAD	IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)	X	5.46	67.51	16.52	0.00	150.0	± 9.6 %
		Y	5.36	67.07	16.24		150.0	
		Z	5.51	67.41	16.49		150.0	
10403-AAB	CDMA2000 (1xEV-DO, Rev. 0)	X	1.05	66.66	11.52	0.00	115.0	± 9.6 %
		Y	0.63	61.33	7.71		115.0	
		Z	1.13	66.86	12.02		115.0	
10404-AAB	CDMA2000 (1xEV-DO, Rev. A)	X	1.05	66.66	11.52	0.00	115.0	± 9.6 %
		Y	0.63	61.33	7.71		115.0	
		Z	1.13	66.86	12.02		115.0	
10406-AAB	CDMA2000, RC3, SO32, SCH0, Full Rate	X	100.00	112.66	25.21	0.00	100.0	± 9.6 %
		Y	20.95	97.54	22.26		100.0	
		Z	100.00	124.86	30.92		100.0	
10410-AAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9, Subframe Conf=4)	X	100.00	124.25	29.89	3.23	80.0	± 9.6 %
		Y	2.61	78.06	17.77		80.0	
		Z	100.00	133.16	34.42		80.0	
10415-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	X	1.02	63.76	15.15	0.00	150.0	± 9.6 %
		Y	0.91	62.08	13.59		150.0	
		Z	1.01	63.30	14.85		150.0	
10416-AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)	X	4.34	66.96	16.32	0.00	150.0	± 9.6 %
		Y	4.21	66.41	15.91		150.0	
		Z	4.39	66.78	16.27		150.0	
10417-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	X	4.34	66.96	16.32	0.00	150.0	± 9.6 %
		Y	4.21	66.41	15.91		150.0	
		Z	4.39	66.78	16.27		150.0	
10418-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble)	X	4.34	67.18	16.39	0.00	150.0	± 9.6 %
		Y	4.21	66.61	15.97		150.0	
		Z	4.39	66.98	16.33		150.0	
10419-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble)	X	4.35	67.11	16.37	0.00	150.0	± 9.6 %
		Y	4.22	66.54	15.95		150.0	
		Z	4.41	66.91	16.31		150.0	
10422-AAB	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	X	4.46	67.07	16.37	0.00	150.0	± 9.6 %
		Y	4.33	66.53	15.98		150.0	
		Z	4.51	66.89	16.32		150.0	
10423-AAB	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	X	4.58	67.32	16.46	0.00	150.0	± 9.6 %
		Y	4.45	66.77	16.06		150.0	
		Z	4.64	67.15	16.41		150.0	
10424-AAB	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	X	4.51	67.27	16.44	0.00	150.0	± 9.6 %
		Y	4.38	66.71	16.03		150.0	
		Z	4.57	67.11	16.39		150.0	
10425-AAB	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	X	5.13	67.40	16.60	0.00	150.0	± 9.6 %
		Y	5.04	66.99	16.32		150.0	
		Z	5.20	67.32	16.58		150.0	
10426-AAB	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	X	5.15	67.49	16.64	0.00	150.0	± 9.6 %
		Y	5.06	67.11	16.37		150.0	
		Z	5.22	67.41	16.62		150.0	

10427-AAB	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	X	5.11	67.26	16.52	0.00	150.0	± 9.6 %
		Y	5.01	66.84	16.23		150.0	
		Z	5.18	67.21	16.51		150.0	
10430-AAB	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	X	4.35	73.15	18.72	0.00	150.0	± 9.6 %
		Y	3.96	71.47	17.62		150.0	
		Z	4.18	71.77	18.24		150.0	
10431-AAB	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	X	3.96	67.63	16.22	0.00	150.0	± 9.6 %
		Y	3.78	66.86	15.63		150.0	
		Z	4.02	67.39	16.18		150.0	
10432-AAB	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	X	4.28	67.41	16.37	0.00	150.0	± 9.6 %
		Y	4.13	66.78	15.91		150.0	
		Z	4.34	67.21	16.32		150.0	
10433-AAB	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	X	4.53	67.31	16.46	0.00	150.0	± 9.6 %
		Y	4.40	66.75	16.06		150.0	
		Z	4.59	67.14	16.41		150.0	
10434-AAA	W-CDMA (BS Test Model 1, 64 DPCH)	X	4.52	74.18	18.54	0.00	150.0	± 9.6 %
		Y	3.92	71.70	17.04		150.0	
		Z	4.28	72.64	18.07		150.0	
10435-AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	123.84	29.70	3.23	80.0	± 9.6 %
		Y	2.49	77.41	17.49		80.0	
		Z	100.00	132.86	34.28		80.0	
10447-AAB	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	X	3.20	67.51	15.05	0.00	150.0	± 9.6 %
		Y	2.95	66.18	14.03		150.0	
		Z	3.27	67.27	15.14		150.0	
10448-AAB	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	X	3.83	67.44	16.10	0.00	150.0	± 9.6 %
		Y	3.66	66.66	15.50		150.0	
		Z	3.88	67.18	16.05		150.0	
10449-AAB	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	X	4.12	67.25	16.28	0.00	150.0	± 9.6 %
		Y	3.98	66.60	15.80		150.0	
		Z	4.17	67.04	16.22		150.0	
10450-AAB	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	X	4.33	67.10	16.32	0.00	150.0	± 9.6 %
		Y	4.20	66.52	15.90		150.0	
		Z	4.38	66.92	16.27		150.0	
10451-AAA	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	X	2.98	67.18	14.23	0.00	150.0	± 9.6 %
		Y	2.69	65.61	13.04		150.0	
		Z	3.09	67.12	14.46		150.0	
10456-AAB	IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle)	X	6.05	67.85	16.71	0.00	150.0	± 9.6 %
		Y	5.99	67.56	16.52		150.0	
		Z	6.14	67.93	16.78		150.0	
10457-AAA	UMTS-FDD (DC-HSDPA)	X	3.71	65.73	16.06	0.00	150.0	± 9.6 %
		Y	3.61	65.22	15.64		150.0	
		Z	3.73	65.50	15.99		150.0	
10458-AAA	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	X	3.76	71.70	16.80	0.00	150.0	± 9.6 %
		Y	3.14	68.72	14.92		150.0	
		Z	3.77	71.19	16.90		150.0	
10459-AAA	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	X	4.84	69.39	17.90	0.00	150.0	± 9.6 %
		Y	4.63	68.66	17.31		150.0	
		Z	4.85	68.80	17.86		150.0	

10460-AAA	UMTS-FDD (WCDMA, AMR)	X	1.00	71.17	17.62	0.00	150.0	± 9.6 %
		Y	0.69	65.37	13.64		150.0	
		Z	0.93	69.50	16.74		150.0	
10461-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	18.12	107.42	27.67	3.29	80.0	± 9.6 %
		Y	1.59	73.10	17.00		80.0	
		Z	100.00	137.52	36.54		80.0	
10462-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.61	60.00	6.52	3.23	80.0	± 9.6 %
		Y	0.65	60.00	7.08		80.0	
		Z	1.55	68.27	12.32		80.0	
10463-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.30	55.70	3.56	3.23	80.0	± 9.6 %
		Y	0.67	60.00	6.38		80.0	
		Z	0.70	60.31	8.06		80.0	
10464-AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	9.68	96.71	23.86	3.23	80.0	± 9.6 %
		Y	1.17	68.99	14.63		80.0	
		Z	100.00	134.32	34.86		80.0	
10465-AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.61	60.00	6.44	3.23	80.0	± 9.6 %
		Y	0.65	60.00	7.01		80.0	
		Z	1.17	65.54	11.13		80.0	
10466-AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.30	55.63	3.47	3.23	80.0	± 9.6 %
		Y	0.67	60.00	6.34		80.0	
		Z	0.67	60.00	7.83		80.0	
10467-AAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	13.05	100.75	24.98	3.23	80.0	± 9.6 %
		Y	1.22	69.68	14.96		80.0	
		Z	100.00	134.78	35.06		80.0	
10468-AAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.61	60.00	6.46	3.23	80.0	± 9.6 %
		Y	0.64	60.00	7.03		80.0	
		Z	1.26	66.28	11.48		80.0	
10469-AAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.30	55.63	3.47	3.23	80.0	± 9.6 %
		Y	0.67	60.00	6.34		80.0	
		Z	0.67	60.00	7.84		80.0	
10470-AAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	13.41	101.11	25.06	3.23	80.0	± 9.6 %
		Y	1.22	69.68	14.96		80.0	
		Z	100.00	134.85	35.08		80.0	
10471-AAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.61	60.00	6.44	3.23	80.0	± 9.6 %
		Y	0.64	60.00	7.02		80.0	
		Z	1.25	66.16	11.41		80.0	
10472-AAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.30	55.60	3.44	3.23	80.0	± 9.6 %
		Y	0.67	60.00	6.32		80.0	
		Z	0.67	60.00	7.82		80.0	
10473-AAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	13.20	100.89	24.99	3.23	80.0	± 9.6 %
		Y	1.22	69.64	14.93		80.0	
		Z	100.00	134.80	35.06		80.0	
10474-AAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.61	60.00	6.44	3.23	80.0	± 9.6 %
		Y	0.64	60.00	7.02		80.0	
		Z	1.23	66.09	11.38		80.0	
10475-AAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.29	55.60	3.43	3.23	80.0	± 9.6 %
		Y	0.67	60.00	6.32		80.0	
		Z	0.67	60.00	7.82		80.0	

10477-AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.61	60.00	6.41	3.23	80.0	± 9.6 %
		Y	0.64	60.00	6.99		80.0	
		Z	1.17	65.51	11.10		80.0	
10478-AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.29	55.58	3.41	3.23	80.0	± 9.6 %
		Y	0.67	60.00	6.31		80.0	
		Z	0.67	60.00	7.81		80.0	
10479-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	10.24	93.57	24.47	3.23	80.0	± 9.6 %
		Y	3.56	78.00	19.13		80.0	
		Z	14.45	99.71	27.27		80.0	
10480-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.37	72.85	14.82	3.23	80.0	± 9.6 %
		Y	1.74	65.35	11.75		80.0	
		Z	10.20	87.09	20.87		80.0	
10481-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.97	66.54	11.88	3.23	80.0	± 9.6 %
		Y	1.37	62.55	10.01		80.0	
		Z	5.58	78.63	17.68		80.0	
10482-AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	1.40	64.37	11.99	2.23	80.0	± 9.6 %
		Y	1.02	60.88	9.69		80.0	
		Z	2.54	71.77	16.13		80.0	
10483-AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	1.49	62.06	9.90	2.23	80.0	± 9.6 %
		Y	1.23	60.00	8.47		80.0	
		Z	2.69	68.58	13.92		80.0	
10484-AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.46	61.60	9.66	2.23	80.0	± 9.6 %
		Y	1.26	60.00	8.46		80.0	
		Z	2.47	67.30	13.36		80.0	
10485-AAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	2.13	69.41	15.87	2.23	80.0	± 9.6 %
		Y	1.58	65.33	13.58		80.0	
		Z	3.12	74.84	18.84		80.0	
10486-AAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	1.99	65.00	12.93	2.23	80.0	± 9.6 %
		Y	1.62	62.36	11.21		80.0	
		Z	2.73	68.96	15.47		80.0	
10487-AAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.99	64.62	12.71	2.23	80.0	± 9.6 %
		Y	1.63	62.15	11.07		80.0	
		Z	2.69	68.36	15.17		80.0	
10488-AAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	2.57	69.86	17.42	2.23	80.0	± 9.6 %
		Y	2.18	67.25	15.98		80.0	
		Z	3.16	72.76	19.11		80.0	
10489-AAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.72	67.31	16.03	2.23	80.0	± 9.6 %
		Y	2.42	65.54	14.96		80.0	
		Z	3.10	69.01	17.27		80.0	
10490-AAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	2.80	67.18	15.97	2.23	80.0	± 9.6 %
		Y	2.50	65.50	14.93		80.0	
		Z	3.18	68.80	17.17		80.0	
10491-AAC	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	2.89	68.81	17.23	2.23	80.0	± 9.6 %
		Y	2.57	66.92	16.18		80.0	
		Z	3.35	70.81	18.46		80.0	
10492-AAC	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.10	66.80	16.33	2.23	80.0	± 9.6 %
		Y	2.86	65.54	15.57		80.0	
		Z	3.41	67.97	17.22		80.0	

10493-AAC	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.16	66.70	16.28	2.23	80.0	± 9.6 %
		Y	2.92	65.48	15.54		80.0	
		Z	3.46	67.82	17.15		80.0	
10494-AAC	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.08	69.97	17.66	2.23	80.0	± 9.6 %
		Y	2.69	67.82	16.52		80.0	
		Z	3.63	72.33	19.00		80.0	
10495-AAC	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.12	67.01	16.54	2.23	80.0	± 9.6 %
		Y	2.88	65.74	15.79		80.0	
		Z	3.43	68.22	17.43		80.0	
10496-AAC	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.20	66.86	16.50	2.23	80.0	± 9.6 %
		Y	2.98	65.66	15.79		80.0	
		Z	3.50	67.97	17.33		80.0	
10497-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	0.90	60.00	8.18	2.23	80.0	± 9.6 %
		Y	0.88	60.00	7.56		80.0	
		Z	1.34	63.69	11.10		80.0	
10498-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	1.08	60.00	6.86	2.23	80.0	± 9.6 %
		Y	1.07	60.00	6.34		80.0	
		Z	1.14	60.00	7.84		80.0	
10499-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.10	60.00	6.68	2.23	80.0	± 9.6 %
		Y	1.10	60.00	6.17		80.0	
		Z	1.16	60.00	7.67		80.0	
10500-AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	2.32	69.67	16.54	2.23	80.0	± 9.6 %
		Y	1.83	66.27	14.63		80.0	
		Z	3.08	73.74	18.86		80.0	
10501-AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.35	66.42	14.35	2.23	80.0	± 9.6 %
		Y	1.97	63.97	12.83		80.0	
		Z	2.95	69.35	16.32		80.0	
10502-AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	2.38	66.22	14.17	2.23	80.0	± 9.6 %
		Y	2.00	63.84	12.67		80.0	
		Z	2.99	69.11	16.12		80.0	
10503-AAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	2.54	69.67	17.32	2.23	80.0	± 9.6 %
		Y	2.15	67.09	15.89		80.0	
		Z	3.12	72.55	19.01		80.0	
10504-AAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.70	67.20	15.97	2.23	80.0	± 9.6 %
		Y	2.41	65.45	14.89		80.0	
		Z	3.09	68.91	17.21		80.0	
10505-AAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	2.78	67.09	15.90	2.23	80.0	± 9.6 %
		Y	2.49	65.41	14.87		80.0	
		Z	3.16	68.71	17.11		80.0	
10506-AAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.05	69.84	17.58	2.23	80.0	± 9.6 %
		Y	2.68	67.70	16.45		80.0	
		Z	3.60	72.19	18.92		80.0	
10507-AAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.10	66.95	16.50	2.23	80.0	± 9.6 %
		Y	2.87	65.68	15.76		80.0	
		Z	3.41	68.16	17.39		80.0	

10508-AAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.19	66.79	16.45	2.23	80.0	± 9.6 %
		Y	2.97	65.60	15.75		80.0	
		Z	3.49	67.90	17.29		80.0	
10509-AAC	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.50	69.10	17.30	2.23	80.0	± 9.6 %
		Y	3.16	67.44	16.43		80.0	
		Z	3.95	70.79	18.31		80.0	
10510-AAC	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.58	66.78	16.63	2.23	80.0	± 9.6 %
		Y	3.37	65.74	16.04		80.0	
		Z	3.87	67.75	17.33		80.0	
10511-AAC	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.66	66.65	16.59	2.23	80.0	± 9.6 %
		Y	3.46	65.66	16.04		80.0	
		Z	3.93	67.53	17.26		80.0	
10512-AAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.54	70.17	17.63	2.23	80.0	± 9.6 %
		Y	3.14	68.17	16.61		80.0	
		Z	4.11	72.33	18.82		80.0	
10513-AAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.47	66.86	16.68	2.23	80.0	± 9.6 %
		Y	3.26	65.76	16.06		80.0	
		Z	3.76	67.92	17.43		80.0	
10514-AAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.52	66.58	16.59	2.23	80.0	± 9.6 %
		Y	3.32	65.56	16.02		80.0	
		Z	3.80	67.54	17.30		80.0	
10515-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)	X	0.98	63.99	15.25	0.00	150.0	± 9.6 %
		Y	0.87	62.19	13.58		150.0	
		Z	0.97	63.51	14.93		150.0	
10516-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)	X	0.77	75.90	20.23	0.00	150.0	± 9.6 %
		Y	0.43	66.10	13.76		150.0	
		Z	0.68	73.13	18.68		150.0	
10517-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)	X	0.84	66.39	16.22	0.00	150.0	± 9.6 %
		Y	0.69	63.31	13.64		150.0	
		Z	0.82	65.63	15.70		150.0	
10518-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)	X	4.33	67.08	16.32	0.00	150.0	± 9.6 %
		Y	4.20	66.51	15.90		150.0	
		Z	4.38	66.88	16.26		150.0	
10519-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)	X	4.47	67.23	16.40	0.00	150.0	± 9.6 %
		Y	4.34	66.67	15.99		150.0	
		Z	4.53	67.05	16.35		150.0	
10520-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)	X	4.33	67.17	16.32	0.00	150.0	± 9.6 %
		Y	4.20	66.58	15.89		150.0	
		Z	4.39	66.99	16.27		150.0	
10521-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)	X	4.27	67.13	16.30	0.00	150.0	± 9.6 %
		Y	4.13	66.53	15.86		150.0	
		Z	4.33	66.96	16.25		150.0	
10522-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)	X	4.31	67.23	16.38	0.00	150.0	± 9.6 %
		Y	4.17	66.63	15.94		150.0	
		Z	4.38	67.09	16.35		150.0	

10523-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle)	X	4.26	67.30	16.35	0.00	150.0	± 9.6 %
		Y	4.12	66.69	15.90		150.0	
		Z	4.30	67.07	16.27		150.0	
10524-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle)	X	4.27	67.23	16.39	0.00	150.0	± 9.6 %
		Y	4.13	66.63	15.96		150.0	
		Z	4.33	67.04	16.34		150.0	
10525-AAB	IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle)	X	4.31	66.36	16.03	0.00	150.0	± 9.6 %
		Y	4.17	65.75	15.60		150.0	
		Z	4.36	66.14	15.96		150.0	
10526-AAB	IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle)	X	4.42	66.62	16.13	0.00	150.0	± 9.6 %
		Y	4.28	65.99	15.70		150.0	
		Z	4.48	66.43	16.08		150.0	
10527-AAB	IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle)	X	4.36	66.60	16.08	0.00	150.0	± 9.6 %
		Y	4.21	65.96	15.63		150.0	
		Z	4.41	66.40	16.02		150.0	
10528-AAB	IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle)	X	4.37	66.61	16.11	0.00	150.0	± 9.6 %
		Y	4.23	65.98	15.67		150.0	
		Z	4.43	66.42	16.05		150.0	
10529-AAB	IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle)	X	4.37	66.61	16.11	0.00	150.0	± 9.6 %
		Y	4.23	65.98	15.67		150.0	
		Z	4.43	66.42	16.05		150.0	
10531-AAB	IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle)	X	4.33	66.62	16.08	0.00	150.0	± 9.6 %
		Y	4.18	65.96	15.63		150.0	
		Z	4.40	66.45	16.03		150.0	
10532-AAB	IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle)	X	4.22	66.49	16.02	0.00	150.0	± 9.6 %
		Y	4.07	65.82	15.55		150.0	
		Z	4.28	66.31	15.96		150.0	
10533-AAB	IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle)	X	4.38	66.70	16.12	0.00	150.0	± 9.6 %
		Y	4.23	66.06	15.67		150.0	
		Z	4.44	66.50	16.05		150.0	
10534-AAB	IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle)	X	4.93	66.53	16.15	0.00	150.0	± 9.6 %
		Y	4.81	66.02	15.81		150.0	
		Z	4.98	66.40	16.10		150.0	
10535-AAB	IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle)	X	4.96	66.63	16.20	0.00	150.0	± 9.6 %
		Y	4.85	66.13	15.86		150.0	
		Z	5.03	66.55	16.17		150.0	
10536-AAB	IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle)	X	4.86	66.65	16.18	0.00	150.0	± 9.6 %
		Y	4.74	66.10	15.82		150.0	
		Z	4.92	66.55	16.15		150.0	
10537-AAB	IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle)	X	4.93	66.67	16.20	0.00	150.0	± 9.6 %
		Y	4.82	66.18	15.87		150.0	
		Z	4.98	66.53	16.14		150.0	
10538-AAB	IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle)	X	4.99	66.59	16.20	0.00	150.0	± 9.6 %
		Y	4.87	66.10	15.87		150.0	
		Z	5.05	66.50	16.17		150.0	
10540-AAB	IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle)	X	4.92	66.56	16.20	0.00	150.0	± 9.6 %
		Y	4.80	66.04	15.86		150.0	
		Z	4.98	66.46	16.17		150.0	

10541-AAB	IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle)	X	4.91	66.49	16.15	0.00	150.0	± 9.6 %
		Y	4.79	65.98	15.80		150.0	
		Z	4.96	66.36	16.10		150.0	
10542-AAB	IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle)	X	5.06	66.58	16.21	0.00	150.0	± 9.6 %
		Y	4.94	66.09	15.88		150.0	
		Z	5.12	66.47	16.17		150.0	
10543-AAB	IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle)	X	5.14	66.68	16.29	0.00	150.0	± 9.6 %
		Y	5.03	66.24	15.99		150.0	
		Z	5.19	66.54	16.23		150.0	
10544-AAB	IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)	X	5.28	66.57	16.12	0.00	150.0	± 9.6 %
		Y	5.18	66.09	15.82		150.0	
		Z	5.33	66.48	16.09		150.0	
10545-AAB	IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle)	X	5.45	67.01	16.30	0.00	150.0	± 9.6 %
		Y	5.36	66.59	16.03		150.0	
		Z	5.51	66.94	16.28		150.0	
10546-AAB	IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle)	X	5.31	66.69	16.15	0.00	150.0	± 9.6 %
		Y	5.20	66.20	15.84		150.0	
		Z	5.36	66.61	16.13		150.0	
10547-AAB	IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle)	X	5.40	66.83	16.22	0.00	150.0	± 9.6 %
		Y	5.31	66.43	15.96		150.0	
		Z	5.44	66.72	16.18		150.0	
10548-AAB	IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle)	X	5.51	67.38	16.47	0.00	150.0	± 9.6 %
		Y	5.42	66.93	16.18		150.0	
		Z	5.60	67.41	16.50		150.0	
10550-AAB	IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle)	X	5.38	66.92	16.28	0.00	150.0	± 9.6 %
		Y	5.30	66.54	16.03		150.0	
		Z	5.43	66.80	16.24		150.0	
10551-AAB	IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle)	X	5.30	66.65	16.11	0.00	150.0	± 9.6 %
		Y	5.18	66.14	15.79		150.0	
		Z	5.36	66.58	16.09		150.0	
10552-AAB	IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle)	X	5.29	66.71	16.14	0.00	150.0	± 9.6 %
		Y	5.18	66.21	15.82		150.0	
		Z	5.34	66.59	16.09		150.0	
10553-AAB	IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle)	X	5.34	66.63	16.13	0.00	150.0	± 9.6 %
		Y	5.23	66.15	15.82		150.0	
		Z	5.39	66.55	16.10		150.0	
10554-AAC	IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle)	X	5.71	66.89	16.19	0.00	150.0	± 9.6 %
		Y	5.61	66.45	15.92		150.0	
		Z	5.75	66.82	16.17		150.0	
10555-AAC	IEEE 802.11ac WiFi (160MHz, MCS1, 99pc duty cycle)	X	5.79	67.09	16.28	0.00	150.0	± 9.6 %
		Y	5.70	66.66	16.01		150.0	
		Z	5.85	67.06	16.28		150.0	
10556-AAC	IEEE 802.11ac WiFi (160MHz, MCS2, 99pc duty cycle)	X	5.83	67.23	16.33	0.00	150.0	± 9.6 %
		Y	5.75	66.83	16.09		150.0	
		Z	5.89	67.17	16.32		150.0	
10557-AAC	IEEE 802.11ac WiFi (160MHz, MCS3, 99pc duty cycle)	X	5.79	67.09	16.28	0.00	150.0	± 9.6 %
		Y	5.69	66.64	16.01		150.0	
		Z	5.84	67.03	16.27		150.0	

10558-AAC	IEEE 802.11ac WiFi (160MHz, MCS4, 99pc duty cycle)	X	5.78	67.10	16.31	0.00	150.0	± 9.6 %
		Y	5.67	66.62	16.02		150.0	
		Z	5.86	67.11	16.33		150.0	
10560-AAC	IEEE 802.11ac WiFi (160MHz, MCS6, 99pc duty cycle)	X	5.81	67.06	16.32	0.00	150.0	± 9.6 %
		Y	5.71	66.60	16.04		150.0	
		Z	5.87	67.02	16.32		150.0	
10561-AAC	IEEE 802.11ac WiFi (160MHz, MCS7, 99pc duty cycle)	X	5.75	67.04	16.35	0.00	150.0	± 9.6 %
		Y	5.65	66.60	16.07		150.0	
		Z	5.80	67.01	16.35		150.0	
10562-AAC	IEEE 802.11ac WiFi (160MHz, MCS8, 99pc duty cycle)	X	5.79	67.18	16.42	0.00	150.0	± 9.6 %
		Y	5.68	66.71	16.13		150.0	
		Z	5.86	67.19	16.44		150.0	
10563-AAC	IEEE 802.11ac WiFi (160MHz, MCS9, 99pc duty cycle)	X	5.90	67.20	16.39	0.00	150.0	± 9.6 %
		Y	5.81	66.78	16.13		150.0	
		Z	5.95	67.14	16.38		150.0	
10564-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle)	X	4.64	67.04	16.41	0.46	150.0	± 9.6 %
		Y	4.52	66.54	16.05		150.0	
		Z	4.70	66.90	16.40		150.0	
10565-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle)	X	4.83	67.45	16.73	0.46	150.0	± 9.6 %
		Y	4.71	66.96	16.38		150.0	
		Z	4.90	67.31	16.71		150.0	
10566-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle)	X	4.66	67.25	16.53	0.46	150.0	± 9.6 %
		Y	4.54	66.74	16.16		150.0	
		Z	4.74	67.14	16.53		150.0	
10567-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle)	X	4.70	67.67	16.92	0.46	150.0	± 9.6 %
		Y	4.58	67.15	16.55		150.0	
		Z	4.77	67.52	16.89		150.0	
10568-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle)	X	4.54	66.92	16.23	0.46	150.0	± 9.6 %
		Y	4.42	66.40	15.85		150.0	
		Z	4.64	66.89	16.28		150.0	
10569-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle)	X	4.70	67.93	17.07	0.46	150.0	± 9.6 %
		Y	4.57	67.41	16.71		150.0	
		Z	4.75	67.73	17.02		150.0	
10570-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle)	X	4.69	67.69	16.95	0.46	150.0	± 9.6 %
		Y	4.56	67.17	16.58		150.0	
		Z	4.76	67.53	16.92		150.0	
10571-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)	X	1.08	64.14	15.45	0.46	130.0	± 9.6 %
		Y	0.97	62.52	14.02		130.0	
		Z	1.11	64.21	15.59		130.0	
10572-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)	X	1.09	64.69	15.82	0.46	130.0	± 9.6 %
		Y	0.98	62.93	14.31		130.0	
		Z	1.12	64.76	15.95		130.0	
10573-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)	X	1.58	84.82	23.68	0.46	130.0	± 9.6 %
		Y	0.69	70.46	16.37		130.0	
		Z	1.86	87.04	24.47		130.0	
10574-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)	X	1.15	70.27	18.88	0.46	130.0	± 9.6 %
		Y	0.93	66.55	16.29		130.0	
		Z	1.19	70.36	18.97		130.0	

10575-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle)	X	4.40	66.72	16.36	0.46	130.0	± 9.6 %
		Y	4.29	66.25	16.02		130.0	
		Z	4.48	66.68	16.44		130.0	
10576-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle)	X	4.43	66.94	16.46	0.46	130.0	± 9.6 %
		Y	4.32	66.47	16.12		130.0	
		Z	4.51	66.87	16.53		130.0	
10577-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle)	X	4.58	67.16	16.60	0.46	130.0	± 9.6 %
		Y	4.47	66.69	16.27		130.0	
		Z	4.67	67.11	16.67		130.0	
10578-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle)	X	4.49	67.32	16.72	0.46	130.0	± 9.6 %
		Y	4.37	66.83	16.37		130.0	
		Z	4.58	67.25	16.77		130.0	
10579-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle)	X	4.24	66.44	15.93	0.46	130.0	± 9.6 %
		Y	4.12	65.94	15.56		130.0	
		Z	4.33	66.47	16.05		130.0	
10580-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle)	X	4.26	66.47	15.94	0.46	130.0	± 9.6 %
		Y	4.15	65.97	15.56		130.0	
		Z	4.37	66.53	16.08		130.0	
10581-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle)	X	4.41	67.42	16.71	0.46	130.0	± 9.6 %
		Y	4.29	66.91	16.34		130.0	
		Z	4.49	67.33	16.75		130.0	
10582-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle)	X	4.16	66.20	15.70	0.46	130.0	± 9.6 %
		Y	4.05	65.70	15.33		130.0	
		Z	4.27	66.25	15.84		130.0	
10583-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)	X	4.40	66.72	16.36	0.46	130.0	± 9.6 %
		Y	4.29	66.25	16.02		130.0	
		Z	4.48	66.68	16.44		130.0	
10584-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)	X	4.43	66.94	16.46	0.46	130.0	± 9.6 %
		Y	4.32	66.47	16.12		130.0	
		Z	4.51	66.87	16.53		130.0	
10585-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)	X	4.58	67.16	16.60	0.46	130.0	± 9.6 %
		Y	4.47	66.69	16.27		130.0	
		Z	4.67	67.11	16.67		130.0	
10586-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)	X	4.49	67.32	16.72	0.46	130.0	± 9.6 %
		Y	4.37	66.83	16.37		130.0	
		Z	4.58	67.25	16.77		130.0	
10587-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)	X	4.24	66.44	15.93	0.46	130.0	± 9.6 %
		Y	4.12	65.94	15.56		130.0	
		Z	4.33	66.47	16.05		130.0	
10588-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)	X	4.26	66.47	15.94	0.46	130.0	± 9.6 %
		Y	4.15	65.97	15.56		130.0	
		Z	4.37	66.53	16.08		130.0	
10589-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)	X	4.41	67.42	16.71	0.46	130.0	± 9.6 %
		Y	4.29	66.91	16.34		130.0	
		Z	4.49	67.33	16.75		130.0	
10590-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)	X	4.16	66.20	15.70	0.46	130.0	± 9.6 %
		Y	4.05	65.70	15.33		130.0	
		Z	4.27	66.25	15.84		130.0	

10591-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle)	X	4.56	66.82	16.50	0.46	130.0	± 9.6 %
		Y	4.45	66.38	16.18		130.0	
		Z	4.64	66.75	16.56		130.0	
10592-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle)	X	4.67	67.10	16.62	0.46	130.0	± 9.6 %
		Y	4.55	66.64	16.30		130.0	
		Z	4.76	67.05	16.68		130.0	
10593-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle)	X	4.58	66.97	16.47	0.46	130.0	± 9.6 %
		Y	4.47	66.51	16.14		130.0	
		Z	4.68	66.93	16.54		130.0	
10594-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle)	X	4.64	67.15	16.64	0.46	130.0	± 9.6 %
		Y	4.53	66.69	16.32		130.0	
		Z	4.73	67.11	16.71		130.0	
10595-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle)	X	4.60	67.13	16.55	0.46	130.0	± 9.6 %
		Y	4.49	66.66	16.22		130.0	
		Z	4.70	67.09	16.62		130.0	
10596-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle)	X	4.53	67.08	16.53	0.46	130.0	± 9.6 %
		Y	4.42	66.60	16.19		130.0	
		Z	4.63	67.06	16.61		130.0	
10597-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle)	X	4.49	66.94	16.38	0.46	130.0	± 9.6 %
		Y	4.37	66.46	16.03		130.0	
		Z	4.58	66.93	16.47		130.0	
10598-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle)	X	4.48	67.20	16.67	0.46	130.0	± 9.6 %
		Y	4.37	66.71	16.32		130.0	
		Z	4.57	67.15	16.73		130.0	
10599-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle)	X	5.24	67.26	16.75	0.46	130.0	± 9.6 %
		Y	5.17	66.94	16.54		130.0	
		Z	5.32	67.23	16.80		130.0	
10600-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle)	X	5.33	67.58	16.88	0.46	130.0	± 9.6 %
		Y	5.27	67.33	16.70		130.0	
		Z	5.43	67.63	16.98		130.0	
10601-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle)	X	5.25	67.42	16.82	0.46	130.0	± 9.6 %
		Y	5.19	67.14	16.63		130.0	
		Z	5.33	67.38	16.87		130.0	
10602-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle)	X	5.32	67.37	16.71	0.46	130.0	± 9.6 %
		Y	5.25	67.07	16.51		130.0	
		Z	5.45	67.53	16.87		130.0	
10603-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle)	X	5.38	67.65	17.00	0.46	130.0	± 9.6 %
		Y	5.30	67.32	16.78		130.0	
		Z	5.51	67.77	17.12		130.0	
10604-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle)	X	5.25	67.20	16.74	0.46	130.0	± 9.6 %
		Y	5.16	66.82	16.49		130.0	
		Z	5.40	67.44	16.93		130.0	
10605-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle)	X	5.31	67.42	16.85	0.46	130.0	± 9.6 %
		Y	5.24	67.10	16.63		130.0	
		Z	5.42	67.50	16.97		130.0	
10606-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle)	X	5.12	66.92	16.45	0.46	130.0	± 9.6 %
		Y	5.05	66.62	16.24		130.0	
		Z	5.20	66.91	16.52		130.0	

10607-AAB	IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle)	X	4.41	66.20	16.16	0.46	130.0	± 9.6 %
		Y	4.29	65.69	15.81		130.0	
		Z	4.49	66.12	16.21		130.0	
10608-AAB	IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle)	X	4.54	66.51	16.30	0.46	130.0	± 9.6 %
		Y	4.41	65.99	15.94		130.0	
		Z	4.63	66.46	16.36		130.0	
10609-AAB	IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle)	X	4.44	66.34	16.12	0.46	130.0	± 9.6 %
		Y	4.31	65.80	15.75		130.0	
		Z	4.53	66.30	16.19		130.0	
10610-AAB	IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle)	X	4.49	66.52	16.29	0.46	130.0	± 9.6 %
		Y	4.36	65.99	15.93		130.0	
		Z	4.58	66.46	16.35		130.0	
10611-AAB	IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle)	X	4.40	66.30	16.13	0.46	130.0	± 9.6 %
		Y	4.27	65.76	15.76		130.0	
		Z	4.49	66.26	16.20		130.0	
10612-AAB	IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle)	X	4.38	66.41	16.16	0.46	130.0	± 9.6 %
		Y	4.25	65.85	15.78		130.0	
		Z	4.48	66.40	16.24		130.0	
10613-AAB	IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle)	X	4.38	66.21	16.00	0.46	130.0	± 9.6 %
		Y	4.25	65.67	15.61		130.0	
		Z	4.48	66.22	16.09		130.0	
10614-AAB	IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle)	X	4.36	66.48	16.27	0.46	130.0	± 9.6 %
		Y	4.23	65.92	15.89		130.0	
		Z	4.44	66.43	16.33		130.0	
10615-AAB	IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle)	X	4.39	66.12	15.89	0.46	130.0	± 9.6 %
		Y	4.26	65.59	15.51		130.0	
		Z	4.49	66.11	15.98		130.0	
10616-AAB	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle)	X	5.05	66.44	16.33	0.46	130.0	± 9.6 %
		Y	4.95	66.02	16.06		130.0	
		Z	5.13	66.43	16.39		130.0	
10617-AAB	IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle)	X	5.08	66.53	16.35	0.46	130.0	± 9.6 %
		Y	4.98	66.12	16.09		130.0	
		Z	5.18	66.59	16.44		130.0	
10618-AAB	IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle)	X	4.99	66.61	16.41	0.46	130.0	± 9.6 %
		Y	4.89	66.15	16.11		130.0	
		Z	5.09	66.65	16.49		130.0	
10619-AAB	IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle)	X	5.02	66.48	16.27	0.46	130.0	± 9.6 %
		Y	4.94	66.10	16.02		130.0	
		Z	5.11	66.46	16.33		130.0	
10620-AAB	IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle)	X	5.08	66.43	16.29	0.46	130.0	± 9.6 %
		Y	4.99	66.02	16.03		130.0	
		Z	5.18	66.46	16.37		130.0	
10621-AAB	IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle)	X	5.10	66.56	16.48	0.46	130.0	± 9.6 %
		Y	5.00	66.14	16.22		130.0	
		Z	5.18	66.56	16.54		130.0	
10622-AAB	IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle)	X	5.08	66.65	16.52	0.46	130.0	± 9.6 %
		Y	4.98	66.22	16.25		130.0	
		Z	5.17	66.66	16.59		130.0	

10623-AAB	IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle)	X	4.98	66.21	16.16	0.46	130.0	± 9.6 %
		Y	4.88	65.79	15.89		130.0	
		Z	5.06	66.21	16.23		130.0	
10624-AAB	IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle)	X	5.17	66.46	16.35	0.46	130.0	± 9.6 %
		Y	5.08	66.07	16.10		130.0	
		Z	5.26	66.47	16.42		130.0	
10625-AAB	IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle)	X	5.25	66.61	16.49	0.46	130.0	± 9.6 %
		Y	5.18	66.30	16.29		130.0	
		Z	5.37	66.66	16.58		130.0	
10626-AAB	IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle)	X	5.38	66.44	16.27	0.46	130.0	± 9.6 %
		Y	5.30	66.05	16.03		130.0	
		Z	5.46	66.46	16.34		130.0	
10627-AAB	IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle)	X	5.60	67.04	16.55	0.46	130.0	± 9.6 %
		Y	5.54	66.74	16.35		130.0	
		Z	5.70	67.10	16.63		130.0	
10628-AAB	IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle)	X	5.37	66.41	16.15	0.46	130.0	± 9.6 %
		Y	5.29	66.01	15.91		130.0	
		Z	5.46	66.46	16.24		130.0	
10629-AAB	IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle)	X	5.49	66.65	16.27	0.46	130.0	± 9.6 %
		Y	5.44	66.37	16.09		130.0	
		Z	5.56	66.64	16.32		130.0	
10630-AAB	IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle)	X	5.67	67.41	16.66	0.46	130.0	± 9.6 %
		Y	5.61	67.09	16.45		130.0	
		Z	5.83	67.66	16.84		130.0	
10631-AAB	IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle)	X	5.67	67.52	16.91	0.46	130.0	± 9.6 %
		Y	5.58	67.12	16.67		130.0	
		Z	5.78	67.60	17.00		130.0	
10632-AAB	IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle)	X	5.62	67.28	16.81	0.46	130.0	± 9.6 %
		Y	5.58	67.03	16.65		130.0	
		Z	5.69	67.24	16.84		130.0	
10633-AAB	IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle)	X	5.39	66.48	16.23	0.46	130.0	± 9.6 %
		Y	5.30	66.07	15.98		130.0	
		Z	5.50	66.59	16.34		130.0	
10634-AAB	IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle)	X	5.43	66.71	16.40	0.46	130.0	± 9.6 %
		Y	5.34	66.29	16.14		130.0	
		Z	5.51	66.70	16.45		130.0	
10635-AAB	IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle)	X	5.28	65.91	15.71	0.46	130.0	± 9.6 %
		Y	5.19	65.51	15.47		130.0	
		Z	5.37	65.99	15.83		130.0	
10636-AAC	IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle)	X	5.82	66.79	16.35	0.46	130.0	± 9.6 %
		Y	5.75	66.43	16.14		130.0	
		Z	5.89	66.82	16.42		130.0	
10637-AAC	IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle)	X	5.93	67.06	16.48	0.46	130.0	± 9.6 %
		Y	5.86	66.73	16.28		130.0	
		Z	6.02	67.15	16.58		130.0	
10638-AAC	IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle)	X	5.97	67.18	16.51	0.46	130.0	± 9.6 %
		Y	5.90	66.83	16.31		130.0	
		Z	6.04	67.18	16.57		130.0	

10639-AAC	IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle)	X	5.91	67.02	16.48	0.46	130.0	± 9.6 %
		Y	5.84	66.65	16.26		130.0	
		Z	6.00	67.07	16.55		130.0	
10640-AAC	IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle)	X	5.86	66.86	16.34	0.46	130.0	± 9.6 %
		Y	5.77	66.46	16.10		130.0	
		Z	5.97	67.00	16.46		130.0	
10641-AAC	IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle)	X	5.97	66.99	16.42	0.46	130.0	± 9.6 %
		Y	5.91	66.67	16.24		130.0	
		Z	6.06	67.06	16.52		130.0	
10642-AAC	IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle)	X	5.99	67.18	16.69	0.46	130.0	± 9.6 %
		Y	5.91	66.80	16.47		130.0	
		Z	6.08	67.23	16.76		130.0	
10643-AAC	IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle)	X	5.84	66.86	16.42	0.46	130.0	± 9.6 %
		Y	5.76	66.48	16.19		130.0	
		Z	5.93	66.95	16.52		130.0	
10644-AAC	IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle)	X	5.88	67.02	16.52	0.46	130.0	± 9.6 %
		Y	5.80	66.62	16.28		130.0	
		Z	5.99	67.15	16.64		130.0	
10645-AAC	IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle)	X	6.01	67.08	16.51	0.46	130.0	± 9.6 %
		Y	5.95	66.75	16.32		130.0	
		Z	6.15	67.27	16.67		130.0	
10646-AAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7)	X	6.09	90.38	31.74	9.30	60.0	± 9.6 %
		Y	4.85	83.69	28.81		60.0	
		Z	8.85	99.41	35.85		60.0	
10647-AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7)	X	5.26	87.32	30.71	9.30	60.0	± 9.6 %
		Y	4.34	81.60	28.08		60.0	
		Z	7.52	95.84	34.73		60.0	
10648-AAA	CDMA2000 (1x Advanced)	X	0.50	62.03	8.43	0.00	150.0	± 9.6 %
		Y	0.37	60.00	6.00		150.0	
		Z	0.54	62.23	8.92		150.0	
10652-AAB	LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	X	3.11	66.19	15.82	2.23	80.0	± 9.6 %
		Y	2.88	64.96	15.01		80.0	
		Z	3.33	66.82	16.45		80.0	
10653-AAB	LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	X	3.67	65.53	16.17	2.23	80.0	± 9.6 %
		Y	3.50	64.72	15.65		80.0	
		Z	3.84	65.93	16.60		80.0	
10654-AAB	LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	X	3.70	65.14	16.21	2.23	80.0	± 9.6 %
		Y	3.55	64.40	15.75		80.0	
		Z	3.85	65.51	16.60		80.0	
10655-AAB	LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	X	3.78	65.04	16.25	2.23	80.0	± 9.6 %
		Y	3.64	64.33	15.82		80.0	
		Z	3.92	65.42	16.63		80.0	
10658-AAA	Pulse Waveform (200Hz, 10%)	X	2.65	66.31	10.09	10.00	50.0	± 9.6 %
		Y	2.79	66.49	10.42		50.0	
		Z	100.00	107.09	23.68		50.0	
10659-AAA	Pulse Waveform (200Hz, 20%)	X	1.56	65.00	8.60	6.99	60.0	± 9.6 %
		Y	1.34	63.69	8.06		60.0	
		Z	100.00	108.00	22.98		60.0	

10660- AAA	Pulse Waveform (200Hz, 40%)	X	1.22	66.63	8.31	3.98	80.0	± 9.6 %
		Y	0.42	60.00	4.93		80.0	
		Z	100.00	112.88	23.74		80.0	
10661- AAA	Pulse Waveform (200Hz, 60%)	X	100.00	91.69	13.69	2.22	100.0	± 9.6 %
		Y	0.24	60.00	3.52		100.0	
		Z	100.00	121.26	25.88		100.0	
10662- AAA	Pulse Waveform (200Hz, 80%)	X	99.99	84.05	9.95	0.97	120.0	± 9.6 %
		Y	1.92	105.49	2.85		120.0	
		Z	100.00	143.45	32.32		120.0	

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

APPENDIX D: SAR TISSUE SPECIFICATIONS

Measurement Procedure for Tissue verification:

- 1) The network analyzer and probe system was configured and calibrated.
- 2) The probe was immersed in the tissue. The tissue was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- 4) The complex relative permittivity ϵ' can be calculated from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\epsilon_r\epsilon_0}{[\ln(b/a)]^2} \int_a^b \int_a^b \int_0^\pi \cos\phi' \frac{\exp[-j\omega r(\mu_0\epsilon_r'\epsilon_0)^{1/2}]}{r} d\phi' d\rho' d\rho$$

where Y is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively, $r^2 = \rho^2 + \rho'^2 - 2\rho\rho'\cos\phi'$, ω is the angular frequency, and $j = \sqrt{-1}$.

Table D-I
Composition of the Tissue Equivalent Matter

Frequency (MHz)	750	835	1750	1900	2300-2600	5200-5800
Tissue	Body	Body	Body	Body	Body	Body
Ingredients (% by weight)						
Bactericide	See page 2	0.1				
DGBE			31	29.44	26.7	
HEC		1				
NaCl		0.94	0.2	0.39	0.1	
Sucrose		44.9				
Polysorbate (Tween) 80						20
Water		53.06	68.8	70.17	73.2	80

FCC ID: BCGA2013	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	Approved by: Quality Manager
Test Dates: 08/08/18 - 09/03/18	DUT Type: Tablet Device		APPENDIX D: Page 1 of 2

2 Composition / Information on ingredients

The Item is composed of the following ingredients:

H ₂ O	Water, 35 – 58%
Sucrose	Sugar, white, refined, 40 – 60%
NaCl	Sodium Chloride, 0 – 6%
Hydroxyethyl-cellulose	Medium Viscosity (CAS# 9004-62-0), <0.3%
Preventol-D7	Preservative: aqueous preparation, (CAS# 55965-84-9), containing 5-chloro-2-methyl-3(2H)-isothiazolone and 2-methyl-3(2H)-isothiazolone, 0.1 – 0.7%
Relevant for safety; Refer to the respective Safety Data Sheet*.	

Figure D-1

Composition of 750 MHz Body Tissue Equivalent Matter

Note: 750MHz liquid recipes are proprietary SPEAG. Since the composition is approximate to the actual liquids utilized, the manufacturer tissue-equivalent liquid data sheets are provided below.

Schmid & Partner Engineering AG

s p e a g

Zeughausstrasse 43, 8004 Zurich, Switzerland
Phone +41 44 245 9700, Fax +41 44 245 9779
info@speag.com, http://www.speag.com

Measurement Certificate / Material Test

Item Name	Body Tissue Simulating Liquid (MSL750V2)
Product No.	SL AAM 075 AA (Batch: 170608-1)
Manufacturer	SPEAG

Measurement Method

TSL dielectric parameters measured using calibrated DAK probe.

Setup Validation

Validation results were within $\pm 2.5\%$ towards the target values of Methanol.

Target Parameters

Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards.

Test Condition

Ambient	Environment temperatur (22 ± 3)°C and humidity < 70%.
TSL Temperature	22°C
Test Date	20-Jun-17
Operator	CL

Additional Information

TSL Density	1.212 g/cm ³
TSL Heat-capacity	3.006 kJ/(kg·K)

f [MHz]	Measured			Target		Diff. to Target [%]	
	e'	e''	sigma	eps	sigma	Δ-eps	Δ-sigma
600	57.3	25.02	0.84	56.1	0.95	2.2	-12.2
625	57.1	24.67	0.86	56.0	0.95	1.9	-10.1
650	56.8	24.32	0.88	55.9	0.96	1.6	-8.0
675	56.6	24.02	0.90	55.8	0.96	1.3	-5.8
700	56.3	23.71	0.92	55.7	0.96	1.1	-3.8
725	56.1	23.48	0.95	55.6	0.96	0.8	-1.5
750	55.9	23.25	0.97	55.5	0.96	0.6	0.7
775	55.6	23.04	0.99	55.4	0.97	0.3	2.9
800	55.4	22.82	1.02	55.3	0.97	0.1	5.0
825	55.2	22.65	1.04	55.2	0.98	-0.1	6.3
838	55.1	22.56	1.05	55.2	0.98	-0.3	6.9
850	54.9	22.47	1.06	55.2	0.99	-0.4	7.5
875	54.7	22.34	1.09	55.1	1.02	-0.7	6.7
900	54.5	22.21	1.11	55.0	1.05	-0.9	5.9
925	54.3	22.08	1.14	55.0	1.06	-1.3	6.9
950	54.1	21.95	1.16	54.9	1.08	-1.6	7.9
975	53.8	21.86	1.19	54.9	1.09	-1.9	9.1
1000	53.6	21.76	1.21	54.8	1.10	-2.2	10.2

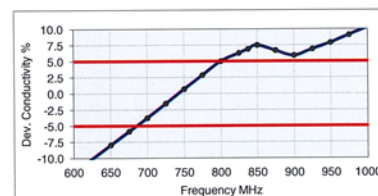
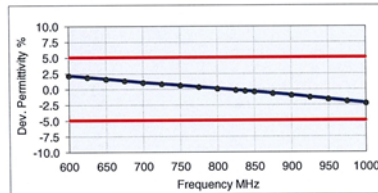


Figure D-2

750MHz Body Tissue Equivalent Matter

FCC ID: BCGA2013		SAR EVALUATION REPORT	Approved by: Quality Manager
Test Dates: 08/08/18 - 09/03/18	DUT Type: Tablet Device		APPENDIX D: Page 2 of 2

APPENDIX E: SAR SYSTEM VALIDATION

Per FCC KDB Publication 865664 D02v01r02, SAR system validation status should be documented to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue- equivalent media for system validation, according to the procedures outlined in FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013. Since SAR probe calibrations are frequency dependent, each probe calibration point was validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters has been included.

Table E-1
SAR System Validation Summary

SAR SYSTEM #	FREQ. [MHz]	DATE	PROBE SN	PROBE TYPE	PROBE CAL. POINT		COND.	PERM.	CW VALIDATION			MOD. VALIDATION		
							(σ)	(εr)	SENSITIVITY	PROBE LINEARITY	PROBE ISOTROPY	MOD. TYPE	DUTY FACTOR	PAR.
AM3	750	8/29/2018	7416	EX3DV4	750	Body	0.960	55.009	PASS	PASS	PASS	N/A	N/A	N/A
AM5	835	4/24/2018	7490	EX3DV4	835	Body	0.979	57.188	PASS	PASS	PASS	GMSK	PASS	N/A
AM7	1750	3/30/2018	3329	ES3DV3	1750	Body	1.534	54.760	PASS	PASS	PASS	N/A	N/A	N/A
AM8	1750	6/20/2018	3287	ES3DV3	1750	Body	1.437	53.450	PASS	PASS	PASS	N/A	N/A	N/A
AM6	1900	4/3/2018	3131	ES3DV3	1900	Body	1.555	51.277	PASS	PASS	PASS	GMSK	PASS	N/A
AM2	2300	6/29/2018	3022	ES3DV2	2300	Body	1.872	51.973	PASS	PASS	PASS	N/A	N/A	N/A
AM1	2450	7/16/2018	3275	ES3DV3	2450	Body	2.004	52.717	PASS	PASS	PASS	OFDM/TDD	PASS	PASS
AM2	2600	7/3/2018	3022	ES3DV2	2600	Body	2.177	52.355	PASS	PASS	PASS	TDD	PASS	N/A
AM6	5250	4/5/2018	3837	EX3DV4	5250	Body	5.455	47.993	PASS	PASS	PASS	OFDM	N/A	PASS
AM6	5600	4/6/2018	3837	EX3DV4	5600	Body	5.963	47.270	PASS	PASS	PASS	OFDM	N/A	PASS
AM6	5750	4/6/2018	3837	EX3DV4	5750	Body	6.176	47.000	PASS	PASS	PASS	OFDM	N/A	PASS

NOTE: While the probes have been calibrated for both CW and modulated signals, all measurements were performed using communication systems calibrated for CW signals only. Modulations in the table above represent test configurations for which the measurement system has been validated per FCC KDB Publication 865664 D01v01r04 for scenarios when CW probe calibrations are used with other signal types. SAR systems were validated for modulated signals with a periodic duty cycle, such as GMSK, or with a high peak to average ratio (>5 dB), such as OFDM according to FCC KDB Publication 865664 D01v01r04.

FCC ID: BCGA2013		SAR EVALUATION REPORT	Approved by: Quality Manager
Test Dates: 08/08/18 - 09/03/18	DUT Type: Tablet Device		APPENDIX E: Page 1 of 1

APPENDIX G

POWER REDUCTION VERIFICATION

The device supports manufacturer's proprietary power reduction mechanism called "Detect Mode" for the Main Cellular Antenna. Details of this mechanism can be found in the Operational Description. When the device is being used "on-body" or "held in hand" by the user, the device will detect motion and reduce the power of the main antenna. Per the manufacturer, the mechanism is agnostic to different cellular air interfaces. Detect Mode operation was verified for two test cases, on-body and held in hand, for each supported cellular band. The power reduction verification results are below.

1.1 Main Antenna Power Reduction Verification Summary

Table G-1

Power Measurement Verification for Main Antenna

Mode/Band	Maximum Scenario Maximum Allowed Target Power [dBm]	Reduced Scenario Maximum Allowed Target Power [dBm]	Conducted Power [dBm]			Verdict
			Maximum	Test Case 1	Test Case 2	
GPRS 850 (2 Tx)	28.50 (± 0.75)	26.95 (± 0.75)	28.37	26.83	26.81	PASS
GPRS 1900 (2 Tx)	25.00 (± 0.75)	19.25 (± 0.75)	25.26	19.12	19.17	PASS
WCDMA B5	23.25 (± 0.50)	19.50 (± 0.50)	23.39	19.62	19.53	PASS
WCDMA B4	25.00 (± 0.50)	14.25 (± 0.50)	25.19	13.97	13.95	PASS
WCDMA B2	25.50 (± 0.50)	13.70 (± 0.50)	25.00	13.64	13.68	PASS
LTE Band 71	25.00 (± 0.50)	21.70 (± 0.50)	25.17	22.18	22.04	PASS
LTE Band 12	25.00 (± 0.50)	19.50 (± 0.50)	24.92	19.66	19.74	PASS
LTE Band 17	25.00 (± 0.50)	19.50 (± 0.50)	25.09	19.71	19.66	PASS
LTE Band 14	25.00 (± 0.50)	20.80 (± 0.50)	25.16	20.79	20.66	PASS
LTE Band 13	23.25 (± 0.50)	20.80 (± 0.50)	23.46	20.90	20.91	PASS
LTE Band 5	25.00 (± 0.50)	20.90 (± 0.50)	25.09	20.88	20.93	PASS
LTE Band 26	25.00 (± 0.50)	20.90 (± 0.50)	25.01	20.92	20.91	PASS
LTE Band 4	25.00 (± 0.50)	14.25 (± 0.50)	25.06	14.31	14.26	PASS
LTE Band 66	25.00 (± 0.50)	14.25 (± 0.50)	25.10	14.45	14.43	PASS
LTE Band 2	24.00 (± 0.50)	14.80 (± 0.50)	24.49	15.22	15.20	PASS
LTE Band 25	24.00 (± 0.50)	14.80 (± 0.50)	24.46	15.17	15.15	PASS
LTE Band 30	23.00 (± 0.50)	13.00 (± 0.50)	23.50	13.33	13.27	PASS
LTE Band 7	23.50 (± 0.50)	11.50 (± 0.50)	23.29	11.28	11.36	PASS
LTE Band 41	22.25 (± 0.50)	14.30 (± 0.50)	22.63	14.58	14.54	PASS

Test Case 1: Device Held in Hand

Test Case 2: Device Resting on Lap

Test Cases represent typical scenarios in which the device power would be reduced. In these scenarios detect mode has been verified to identify typical on-body use-cases including when thin objects, such as a magazine or newspaper, are placed between the body and the device. In the absence of detect mode output, the device defaults to the most conservative power.

FCC ID: BCGA2013	 SAR EVALUATION REPORT	Reviewed by: Quality Manager
Test Dates: 08/08/2018 – 09/03/2018	DUT Type: Tablet Device	APPENDIX G: Page 1 of 1

APPENDIX H: DOWNLINK LTE CA RF CONDUCTED POWERS

1.1 LTE Downlink Only Carrier Aggregation Test Reduction Methodology

SAR test exclusion for LTE downlink Carrier Aggregation is determined by power measurements according to the number of component carriers (CCs) supported by the product implementation. Per April 2018 TCBC Workshop Notes, the following test reduction methodology was applied to determine the combinations required for conducted power measurements.

LTE DLCA Test Reduction Methodology:

- The supported combinations were arranged by the number of component carriers in columns.
- Any limitations on the PCC or SCC for each combination were identified alongside the combination (e.g. CA_2A-2A-4A-12A, but B12 can only be configured as a SCC).
- Power measurements were performed for "supersets" (LTE CA combinations with multiple components carriers) and any "subsets" (LTE CA combinations with fewer component carriers) that were not completely covered by the supersets.
- Only subsets that have the exact same components as a superset were excluded for measurement.
- When there were certain restrictions on component carriers that existed in the superset that were not applied for the subset, the subset configuration was additionally evaluated.
- Both inter-band and intra-band downlink carrier aggregation scenarios were considered.
- Downlink CA combinations for SISO and 4x4 Downlink MIMO operations were measured independently, per May 2017 TCBC Workshop notes.

Table 1 – Example of Exclusion Table for SISO Configurations

Index	2CC	Supported Channel Bandwidth (MHz)	Restriction	Completely Covered by Measurement Superset
CCC #1	CA 2A	5, 10, 15, 20	CCC #1	No
CCC #2	CA 2A-2A	5, 10, 15, 20	CCC #2	No
CCC #3	CA 2A-2A-4A	5, 10, 15, 20	CCC #3	No
CCC #4	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #4	No
CCC #5	CA 2A-2A-4A-12A-12A	5, 10, 15, 20	CCC #5	No
CCC #6	CA 2A-2A-4A-12A-12A-12A	5, 10, 15, 20	CCC #6	No
CCC #7	CA 2A-2A-4A-12A-12A-12A-12A	5, 10, 15, 20	CCC #7	No
CCC #8	CA 2A-2A-4A-12A-12A-12A-12A-12A	5, 10, 15, 20	CCC #8	No
CCC #9	CA 2A-2A-4A-12A-12A-12A-12A-12A-12A	5, 10, 15, 20	CCC #9	No
CCC #10	CA 2A-2A-4A-12A-12A-12A-12A-12A-12A-12A	5, 10, 15, 20	CCC #10	No
CCC #11	CA 2A-2A-4A-12A-12A-12A-12A-12A-12A-12A-12A	5, 10, 15, 20	CCC #11	No
CCC #12	CA 2A-2A-4A-12A-12A-12A-12A-12A-12A-12A-12A-12A	5, 10, 15, 20	CCC #12	No
CCC #13	CA 2A-2A-4A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A	5, 10, 15, 20	CCC #13	No
CCC #14	CA 2A-2A-4A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A	5, 10, 15, 20	CCC #14	No
CCC #15	CA 2A-2A-4A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A	5, 10, 15, 20	CCC #15	No
CCC #16	CA 2A-2A-4A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A	5, 10, 15, 20	CCC #16	No
CCC #17	CA 2A-2A-4A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A	5, 10, 15, 20	CCC #17	No
CCC #18	CA 2A-2A-4A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A	5, 10, 15, 20	CCC #18	No
CCC #19	CA 2A-2A-4A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A	5, 10, 15, 20	CCC #19	No
CCC #20	CA 2A-2A-4A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A	5, 10, 15, 20	CCC #20	No
CCC #21	CA 2A-2A-4A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A	5, 10, 15, 20	CCC #21	No
CCC #22	CA 2A-2A-4A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A	5, 10, 15, 20	CCC #22	No
CCC #23	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #23	No
CCC #24	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #24	No
CCC #25	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #25	No
CCC #26	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #26	No
CCC #27	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #27	No
CCC #28	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #28	No
CCC #29	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #29	No
CCC #30	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #30	No
CCC #31	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #31	No
CCC #32	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #32	No
CCC #33	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #33	No
CCC #34	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #34	No
CCC #35	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #35	No
CCC #36	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #36	No
CCC #37	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #37	No
CCC #38	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #38	No
CCC #39	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #39	No
CCC #40	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #40	No
CCC #41	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #41	No
CCC #42	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #42	No
CCC #43	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #43	No
CCC #44	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #44	No
CCC #45	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #45	No
CCC #46	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #46	No
CCC #47	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #47	No
CCC #48	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #48	No
CCC #49	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #49	No
CCC #50	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #50	No
CCC #51	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #51	No
CCC #52	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #52	No
CCC #53	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #53	No
CCC #54	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #54	No
CCC #55	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #55	No
CCC #56	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #56	No
CCC #57	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #57	No
CCC #58	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #58	No
CCC #59	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #59	No
CCC #60	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #60	No
CCC #61	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #61	No
CCC #62	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #62	No
CCC #63	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #63	No
CCC #64	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #64	No
CCC #65	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #65	No
CCC #66	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #66	No
CCC #67	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #67	No
CCC #68	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #68	No
CCC #69	CA 2A-2A-4A-12A	5, 10, 15, 20	CCC #69	No
CCC #70	CA 2A-2A-4A-12A-12A-			

1.2 LTE Downlink Only Carrier Aggregation Test Selection and Setup

SAR test exclusion for LTE downlink Carrier Aggregation is determined by power measurements according to the number component carriers (CCs) supported by the product implementation. For those configurations required by April 2018 TCBC Workshop Notes, conducted power measurements with LTE Carrier Aggregation (CA) (downlink only) active are made in accordance to KDB Publication 941225 D05Av01r02. The RRC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. Additional conducted output powers are measured with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band.

This device supports LAA with downlink carrier aggregation only. It uses carrier aggregation in the downlink to combine LTE in the unlicensed spectrum (i.e. LTE Band 46) with LTE in the licensed band (served as PCC). All uplink communications and acknowledgements on the PCC remain identical to specifications when downlink carrier aggregation is inactive.

Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for carrier aggregation configurations when the average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive.

General PCC and SCC configuration selection procedure

- PCC uplink channel, channel bandwidth, modulation and RB configurations were selected based on section C)3)b)ii) of KDB 941225 D05 V01r02. The downlink PCC channel was paired with the selected PCC uplink channel according to normal configurations without carrier aggregation.
- To maximize aggregated bandwidth, highest channel bandwidth available for that CA combination was selected for SCC. For inter-band CA, the SCC downlink channels were selected near the middle of their transmission bands. For contiguous intra-band CA, the downlink channel spacing between the component carriers was set to multiple of 300 kHz less than the nominal channel spacing defined in section 5.4.1A of 3GPP TS 36.521. For non-contiguous intra-band CA, the downlink channel spacing between the component carriers was set to be larger than the nominal channel spacing and provided maximum separation between the component carriers.
- All selected PCC and SCC(s) remained fully within the uplink/downlink transmission band of the respective component carrier.
- When a device supports LTE capabilities with overlapping transmission frequency ranges, the standalone powers from the band with a larger transmission frequency range can be used to select measurement configurations for the band with the fully covered transmission frequency range.




Figure 1
DL CA Power Measurement Setup

FCC ID: BCGA2013	 SAR EVALUATION REPORT	Reviewed by: Quality Manager
Test Dates: 08/08/18 - 09/03/18	DUT Type: Tablet Device	APPENDIX H: Page 2 of 38

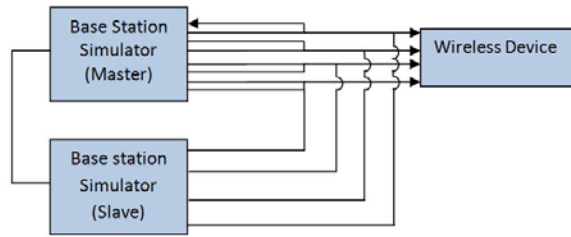


Figure 2
DL CA with DL 4x4 MIMO Power Measurement Setup

1.3 Downlink Carrier Aggregation RF Conducted Powers

1.3.1 LTE Band 71 as PCC

Table 1
Output Powers – Ant 1

Combination	PCC Band	PCC BW [MHz]	PCC [UL] Ch.	PCC [UL] Freq. [MHz]	Mod.	PCC				SCC 1				SCC 2				Power	
						PCC UL# RB	PCC UL RB Offset	PCC (DL) Channel	PCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	LTE Tx Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA 2A-2A-71A	LTE B71	20	133297	680.5	QPSK	1	50	68761	634.5	LTE B2	20	900	1960	LTE B2	20	700	1940	19.98	20.00
CA 2A-4A-71A	LTE B71	20	133297	680.5	QPSK	1	50	68761	634.5	LTE B2	20	900	1960	LTE B4	20	2175	2132.5	19.97	20.00
CA 2A-6A-71A	LTE B71	20	133297	680.5	QPSK	1	50	68761	634.5	LTE B2	20	900	1960	LTE B66	20	66786	2145	19.96	20.00
CA 4A-4A-71A	LTE B71	20	133297	680.5	QPSK	1	50	68761	634.5	LTE B4	20	2175	2132.5	LTE B4	10	2350	2150	19.97	20.00
CA 6A-6A-71A	LTE B71	20	133297	680.5	QPSK	1	50	68761	634.5	LTE B66	20	66786	2145	LTE B66	20	67236	2190	19.95	20.00
CA 66C-71A	LTE B71	20	133297	680.5	QPSK	1	50	68761	634.5	LTE B66	20	66786	2145	LTE B66	20	66984	2164.8	20.00	20.00

Table 2
Output Powers – Ant 3

Combination	PCC Band	PCC BW [MHz]	PCC [UL] Ch.	PCC [UL] Freq. [MHz]	Mod.	PCC				SCC 1				SCC 2				Power	
						PCC UL# RB	PCC UL RB Offset	PCC (DL) Channel	PCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	LTE Tx Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA 2A-2A-71A	LTE B71	20	133297	680.5	QPSK	1	99	68761	634.5	LTE B2	20	900	1960	LTE B2	20	700	1940	22.16	22.20
CA 2A-4A-71A	LTE B71	20	133297	680.5	QPSK	1	99	68761	634.5	LTE B2	20	900	1960	LTE B4	20	2175	2132.5	22.14	22.20
CA 2A-6A-71A	LTE B71	20	133297	680.5	QPSK	1	99	68761	634.5	LTE B2	20	900	1960	LTE B66	20	66786	2145	22.06	22.20
CA 4A-4A-71A	LTE B71	20	133297	680.5	QPSK	1	99	68761	634.5	LTE B4	20	2175	2132.5	LTE B4	10	2350	2150	22.16	22.20
CA 6A-6A-71A	LTE B71	20	133297	680.5	QPSK	1	99	68761	634.5	LTE B66	20	66786	2145	LTE B66	20	67236	2190	22.20	22.20
CA 66C-71A	LTE B71	20	133297	680.5	QPSK	1	99	68761	634.5	LTE B66	20	66786	2145	LTE B66	20	66984	2164.8	22.20	22.20

1.3.2 LTE Band 12 as PCC

Table 3
Output Powers – Ant 1

Combination	PCC Band	PCC BW [MHz]	PCC [UL] Ch.	PCC [UL] Freq. [MHz]	Mod.	PCC				SCC 1				SCC 2				Power	
						PCC UL# RB	PCC UL RB Offset	PCC (DL) Channel	PCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	LTE Tx Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA 2A-12A	LTE B12	10	23095	707.5	QPSK	1	49	5095	737.5	LTE B2	20	900	1960	-	-	-	-	19.65	19.67
CA 4A-12A (1)	LTE B12	10	23095	707.5	QPSK	1	49	5095	737.5	LTE B4	20	2175	2132.5	-	-	-	-	19.63	19.67
CA 4A-12A (2)	LTE B12	3	23095	707.5	QPSK	1	7	5095	737.5	LTE B4	20	2175	2132.5	-	-	-	-	19.66	19.68
CA 12A-66A (1)	LTE B12	10	23095	707.5	QPSK	1	49	5095	737.5	LTE B66	20	66786	2145	-	-	-	-	19.70	19.67
CA 12A-66A (2)	LTE B12	3	23095	707.5	QPSK	1	7	5095	737.5	LTE B66	20	66786	2145	-	-	-	-	19.70	19.68
CA 2C-12A	LTE B12	10	23095	707.5	QPSK	1	49	5095	737.5	LTE B2	20	900	1960	LTE B2	20	700	1940.2	19.66	19.67
CA 4A-7A-12A (1)	LTE B12	10	23095	707.5	QPSK	1	49	5095	737.5	LTE B4	20	2175	2132.5	LTE B7	20	3100	2655	19.70	19.67
CA 2A-2A-12B	LTE B12	5	23095	707.5	QPSK	1	0	5095	737.5	LTE B12	5	5047	732.7	LTE B2	20	900	1960	19.56	19.66
CA 2A-2A-4A-12A	LTE B12	10	23095	707.5	QPSK	1	49	5095	737.5	LTE B2	20	900	1960	LTE B2	20	700	1940	19.65	19.67
CA 2A-4A-4A-12A	LTE B12	10	23095	707.5	QPSK	1	49	5095	737.5	LTE B2	20	900	1960	LTE B4	20	2175	2132.5	19.62	19.67
CA 2A-4A-12B	LTE B12	5	23095	707.5	QPSK	1	0	5095	737.5	LTE B12	5	5047	732.7	LTE B4	20	2175	2132.5	19.67	19.68
CA 2A-2A-12A-30A	LTE B12	10	23095	707.5	QPSK	1	49	5095	737.5	LTE B2	20	900	1960	LTE B2	20	700	1940	19.64	19.67
CA 2A-2A-12A-66A	LTE B12	10	23095	707.5	QPSK	1	49	5095	737.5	LTE B2	20	900	1960	LTE B66	20	66786	2145	19.64	19.67
CA 2A-12A-66A-66A	LTE B12	10	23095	707.5	QPSK	1	49	5095	737.5	LTE B2	20	900	1960	LTE B66	20	66786	2145	19.63	19.67
CA 2A-12A-66C	LTE B12	10	23095	707.5	QPSK	1	49	5095	737.5	LTE B2	20	900	1960	LTE B66	20	66786	2145	19.65	19.67
CA 2A-4A-12A-30A	LTE B12	10	23095	707.5	QPSK	1	49	5095	737.5	LTE B2	20	900	1960	LTE B4	20	2175	2132.5	19.66	19.67
CA 2A-12A-30A-66A	LTE B12	10	23095	707.5	QPSK	1	49	5095	737.5	LTE B2	20	900	1960	LTE B30	10	9820	2355	19.65	19.67
CA 4A-4A-12B	LTE B12	5	23095	707.5	QPSK	1	0	5095	737.5	LTE B12	5	5047	732.7	LTE B4	20	2175	2132.5	19.59	19.66
CA 4A-6A-12A-30A	LTE B12	10	23095	707.5	QPSK	1	49	5095	737.5	LTE B4	20	2175	2132.5	LTE B4	10	2350	2150	19.66	19.67
CA 12A-30A-66A-66A	LTE B12	10	23095	707.5	QPSK	1	49	5095	737.5	LTE B30	10	9820	2355	LTE B66	20	66786	2145	19.63	19.67

FCC ID: BCGA2013	 SAR EVALUATION REPORT	Reviewed by: Quality Manager
Test Dates: 08/08/18 - 09/03/18	DUT Type: Tablet Device	APPENDIX H: Page 3 of 38

Table 19
Output Powers – Ant 2A

Table 20
Output Powers – Ant 2B

11/13/2017

Output Powers – Ant 4A

Combination		PCC										SSC 1				SSC 2				SSC 3				SSC 4				Power					
PCC Band	PCC BW [MHz]	PCC LUT [MHz]	PCC [Hz] Freq. [MHz]	PCC Mod.	PCC LUT RB	PCC LUT RB Offset	PCC [Hz] Channel	PCC [Hz] Freq. [MHz]	SSC BW [MHz]	SSC [Hz] Channel	SSC [Hz] Freq. [MHz]	SSC Band	SSC BW [MHz]	SSC [Hz] Channel	SSC [Hz] Freq. [MHz]	SSC Band	SSC BW [MHz]	SSC [Hz] Channel	SSC [Hz] Freq. [MHz]	SSC Band	SSC BW [MHz]	SSC [Hz] Channel	SSC [Hz] Freq. [MHz]	SSC Band	SSC BW [MHz]	SSC [Hz] Channel	SSC [Hz] Freq. [MHz]	LTE Tx Power with Co-CA Enabled [dBm]	LTE Single Carrier Tx Power [dBm]				
CA 2A-6A	LTE B2	20	18700	1800	QPSK	1	0	700	1940	LTE B4	20	2375	2132.5	5	20	1940	LTE B4	20	2375	2132.5	5	20	1940	LTE B4	20	2375	2132.5	5	20	1940			
CA 2A-12A	LTE B2	20	18700	1800	QPSK	1	0	700	1940	LTE B12	10	5095	737.5	5	20	1940	LTE B12	10	5095	737.5	5	20	1940	LTE B12	10	5095	737.5	5	20	1940			
CA 2A-17A	LTE B2	20	18700	1800	QPSK	1	0	1150	1985	LTE B17	10	5200	750	5	20	1940	LTE B17	10	5200	750	5	20	1940	LTE B17	10	5200	750	5	20	1940			
CA 2A-26A	LTE B2	20	18700	1800	QPSK	1	0	1150	1985	LTE B26	10	5200	750	5	20	1940	LTE B26	10	5200	750	5	20	1940	LTE B26	10	5200	750	5	20	1940			
CA 2A-6A	LTE B2	20	18700	1800	QPSK	1	0	700	1940	LTE B66	20	66786	2145	20	1940	LTE B66	20	66786	2145	20	1940	LTE B66	20	66786	2145	20	1940	LTE B66	20	66786	2145	20	1940
CA 2C-5A	LTE B2	20	18700	1800	QPSK	1	0	700	1940	LTE B2	20	898	1909.8	1	80	1940	LTE B5	10	2525	881.5	5	20	1940	LTE B5	10	2525	881.5	5	20	1940			
CA 2A-12A	LTE B2	20	18700	1800	QPSK	1	0	700	1940	LTE B12	10	5095	737.5	5	20	1940	LTE B12	10	5095	737.5	5	20	1940	LTE B12	10	5095	737.5	5	20	1940			
CA 2C-29A	LTE B2	20	18700	1800	QPSK	1	0	700	1940	LTE B2	20	898	1909.8	1	80	1940	LTE B29	10	9715	722.5	5	20	1940	LTE B29	10	9715	722.5	5	20	1940			
CA 2C-3A	LTE B2	20	18700	1800	QPSK	1	0	700	1940	LTE B2	20	898	1909.8	1	80	1940	LTE B30	10	9820	2355	5	20	1940	LTE B30	10	9820	2355	5	20	1940			
CA 2A-26A	LTE B2	20	18700	1800	QPSK	1	0	700	1940	LTE B26	10	5200	750	5	20	1940	LTE B26	10	5200	750	5	20	1940	LTE B26	10	5200	750	5	20	1940			
CA 2A-6A	LTE B2	20	18700	1800	QPSK	1	0	700	1940	LTE B66	20	66666	5537.5	1	80	1940	LTE B66	20	66666	5537.5	1	80	1940	LTE B66	20	66666	5537.5	1	80	1940			
CA 2C-6A	LTE B2	20	18700	1800	QPSK	1	0	700	1940	LTE B66	20	66666	5537.5	1	80	1940	LTE B66	20	66666	5537.5	1	80	1940	LTE B66	20	66666	5537.5	1	80	1940			
CA 2A-12A	LTE B2	20	18700	1800	QPSK	1	0	700	1940	LTE B12	10	5095	737.5	5	20	1940	LTE B12	10	5095	737.5	5	20	1940	LTE B12	10	5095	737.5	5	20	1940			
CA 2A-44A	LTE B2	20	18700	1800	QPSK	1	0	700	1940	LTE B44	20	2175	2132.5	1	80	1940	LTE B44	20	2175	2132.5	1	80	1940	LTE B44	20	2175	2132.5	1	80	1940			
CA 2A-11A	LTE B2	20																															

Output Powers – Ant 4B

[illegible]

11/15/2017

SCC 1				SCC 2		

Table 34

SCC 1				SCC 2		

		SCC 1			

		SCC 1			

		SCC 1			

18 PCTEST Engineering Laboratory, Inc. REV 20.05 M

1.4 DL CA with DL 4x4 MIMO RF Conduction Powers

This device supports downlink 4x4 MIMO operations for some LTE bands. Uplink transmission is limited to a single output stream. When carrier aggregation was applicable, the general test selection and setup procedures described in Section 1.2 were applied.

Per May 2017 TCB Workshop Notes, SAR for 4x4 DL MIMO was not needed since the maximum average output power in 4x4 DL MIMO mode was not more than 0.25 dB higher than the maximum output power with 4x4 DL MIMO inactive. Additionally, SAR for 4x4 MIMO Downlink Carrier Aggregation was not needed since the maximum average output power in 4x4 MIMO Downlink Carrier Aggregation mode was not more than 0.25 dB higher than the maximum output power with 4x4 MIMO Downlink and downlink carrier aggregation inactive.

1.4.1 LTE 4x4 MIMO DL Standalone Powers

Table 47
Output Powers – Ant 2A

LTE Band	Bandwidth [MHz]	Channel	Frequency [MHz]	Modulation	RB Size	RB Offset	4x4 DL MIMO Tx. Power [dBm]	Single Antenna Tx. Power [dBm]	Maximum Allowed Output Power [dBm]
4	15	20025	1717.5	16QAM	1	36	14.67	14.70	14.7
66	15	132047	1717.5	16QAM	1	36	14.66	14.70	14.7
2	20	18925	1882.5	QPSK	1	0	13.93	14.00	14.0
25	20	26365	1882.5	QPSK	1	0	13.98	14.00	14.0
7	20	20850	2510	QPSK	1	0	11.97	12.00	12.0
30	5	27710	2310	16QAM	1	24	12.57	12.60	12.6
41	10	40185	2549.5	QPSK	1	0	14.75	14.76	14.8
41 PC2	10	40185	2549.5	QPSK	1	0	14.78	14.79	14.8

FCC ID: BCGA2013	 SAR EVALUATION REPORT	Reviewed by: Quality Manager
Test Dates: 08/08/18 - 09/03/18	DUT Type: Tablet Device	APPENDIX H: Page 16 of 38

Table 48
Output Powers – Ant 2B

LTE Band	Bandwidth [MHz]	Channel	Frequency [MHz]	Modulation	RB Size	RB Offset	4x4 DL MIMO Tx. Power [dBm]	Single Antenna Tx. Power [dBm]	Maximum Allowed Output Power [dBm]
4	20	20300	1745	QPSK	1	99	14.28	14.30	14.3
66	20	132572	1770	QPSK	1	99	14.27	14.30	14.3
2	20	18925	1882.5	QPSK	1	99	13.70	13.70	13.7
25	20	26365	1882.5	QPSK	1	99	13.68	13.70	13.7
7	20	21100	2535	QPSK	1	0	12.19	12.30	12.3
30	10	27710	2310	QPSK	1	0	12.87	12.86	13.4
41	20	40185	2549.5	QPSK	1	0	14.48	14.50	14.5
41 PC2	20	40185	2549.5	QPSK	1	99	14.48	14.50	14.5

Table 49
Output Powers – Ant 4A

LTE Band	Bandwidth [MHz]	Channel	Frequency [MHz]	Modulation	RB Size	RB Offset	4x4 DL MIMO Tx. Power [dBm]	Single Antenna Tx. Power [dBm]	Maximum Allowed Output Power [dBm]
4	20	20300	1745	QPSK	1	99	14.97	15.00	15.0
66	20	132322	1745	QPSK	1	99	14.95	15.00	15.0
2	20	18700	1860	QPSK	1	0	15.30	15.28	15.3
25	20	26140	1860	QPSK	1	0	15.26	15.28	15.3
7	20	21100	2535	QPSK	1	99	11.96	12.00	12.0
30	10	27710	2310	QPSK	1	49	13.41	13.45	13.5
41	20	39750	2506	QPSK	1	99	14.47	14.50	14.5
41 PC2	20	39750	2506	QPSK	1	99	14.50	14.50	14.5

Table 50
Output Powers – Ant 4B

LTE Band	Bandwidth [MHz]	Channel	Frequency [MHz]	Modulation	RB Size	RB Offset	4x4 DL MIMO Tx. Power [dBm]	Single Antenna Tx. Power [dBm]	Maximum Allowed Output Power [dBm]
4	10	20000	1715	64QAM	1	0	14.49	14.47	14.75
66	10	132022	1715	64QAM	1	0	14.43	14.47	14.75
2	15	18925	1882.5	QPSK	1	74	14.14	14.19	14.2
25	15	26365	1882.5	QPSK	1	74	14.12	14.19	14.2
7	20	21100	2535	QPSK	1	0	11.99	12.00	12.3
30	5	27710	2310	16QAM	1	24	13.17	13.19	13.7
41	20	40185	2549.5	QPSK	1	50	15.00	15.00	15.0
41 PC2	20	40185	2549.5	QPSK	1	0	15.00	15.00	15.0

FCC ID: BCGA2013	 SAR EVALUATION REPORT	Reviewed by: Quality Manager
Test Dates: 08/08/18 - 09/03/18	DUT Type: Tablet Device	APPENDIX H: Page 17 of 38

Table 54
Output Powers – Ant 3

Combination	PCC Band	PCC BW [MHz]	PCC (UL) Ch.	PCC (UL) Freq. [MHz]	Mod.	PCC UL RB	PCC UL RB Offset	PCC (DL) Ch.	PCC (DL) Freq. [MHz]	DL Ant. Config.	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	DL Ant. Config.	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	DL Ant. Config.	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	DL Ant. Config.	LTE Tx Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)	
CA [2A]-12A	LTE B12	10	23095	707.5	16QAM	1	0	5095	737.5	2x2 MIMO	LTE B2	20	900	1960	4x4 MIMO	-	-	-	-	-	-	-	-	-	-	19.97	20.00	
CA [4A]-12A (1)	LTE B12	10	23095	707.5	16QAM	1	0	5095	737.5	2x2 MIMO	LTE B4	20	2175	2132.5	4x4 MIMO	-	-	-	-	-	-	-	-	-	-	-	19.98	20.00
CA [4A]-12A (2)	LTE B12	10	23095	707.5	16QAM	1	0	5095	737.5	2x2 MIMO	LTE B4	20	2175	2132.5	4x4 MIMO	-	-	-	-	-	-	-	-	-	-	-	19.98	20.00
CA [7A]-12A	LTE B12	10	23095	707.5	16QAM	1	0	5095	737.5	2x2 MIMO	LTE B7	20	3100	2655	4x4 MIMO	-	-	-	-	-	-	-	-	-	-	-	19.91	20.00
CA [2A]-66A (1)	LTE B12	10	23095	707.5	16QAM	1	0	5095	737.5	2x2 MIMO	LTE B66	20	66786	2145	4x4 MIMO	-	-	-	-	-	-	-	-	-	-	-	19.96	20.00
CA [2A]-66A (2)	LTE B12	10	23095	707.5	16QAM	1	0	5095	737.5	2x2 MIMO	LTE B66	20	66786	2145	4x4 MIMO	-	-	-	-	-	-	-	-	-	-	-	19.96	20.00
CA [2A]-2A-12A	LTE B12	10	23095	707.5	16QAM	1	0	5095	737.5	2x2 MIMO	LTE B2	20	900	1960	4x4 MIMO	LTE B2	20	700	1940	2x2 MIMO	-	-	-	-	-	-	19.96	20.00
CA [2C]-12A	LTE B12	10	23095	707.5	16QAM	1	0	5095	737.5	2x2 MIMO	LTE B2	20	900	1960	4x4 MIMO	LTE B2	20	702	1940.2	4x4 MIMO	-	-	-	-	-	-	19.98	20.00
CA [2A]-4A-12A	LTE B12	10	23095	707.5	16QAM	1	0	5095	737.5	2x2 MIMO	LTE B2	20	900	1960	4x4 MIMO	LTE B4	20	2175	2132.5	2x2 MIMO	-	-	-	-	-	-	19.99	20.00
CA [2A]-4A-12A	LTE B12	10	23095	707.5	16QAM	1	0	5095	737.5	2x2 MIMO	LTE B2	20	900	1960	2x2 MIMO	LTE B4	20	2175	2132.5	4x4 MIMO	-	-	-	-	-	-	19.95	20.00
CA [2A]-12A-[30A]	LTE B12	10	23095	707.5	16QAM	1	0	5095	737.5	2x2 MIMO	LTE B2	20	900	1960	2x2 MIMO	LTE B30	10	9820	2355	4x4 MIMO	-	-	-	-	-	-	19.98	20.00
CA [2A]-12A-66A	LTE B12	10	23095	707.5	16QAM	1	0	5095	737.5	2x2 MIMO	LTE B2	20	900	1960	4x4 MIMO	LTE B66	20	66786	2145	2x2 MIMO	-	-	-	-	-	-	19.97	20.00
CA [2A]-12A-[66A]	LTE B12	10	23095	707.5	16QAM	1	0	5095	737.5	2x2 MIMO	LTE B2	20	900	1960	2x2 MIMO	LTE B66	20	66786	2145	4x4 MIMO	-	-	-	-	-	-	20.00	20.00
CA [4A]-4A-12A	LTE B12	10	23095	707.5	16QAM	1	0	5095	737.5	2x2 MIMO	LTE B4	20	2175	2132.5	4x4 MIMO	LTE B4	10	2350	2150	2x2 MIMO	-	-	-	-	-	-	19.95	20.00
CA [4A]-[7A]-12A (1)	LTE B12	10	23095	707.5	16QAM	1	0	5095	737.5	2x2 MIMO	LTE B4	20	2175	2132.5	2x2 MIMO	LTE B7	20	3100	2655	4x4 MIMO	-	-	-	-	-	-	19.98	20.00
CA [4A]-12A-[30A]	LTE B12	10	23095	707.5	16QAM	1	0	5095	737.5	2x2 MIMO	LTE B4	20	2175	2132.5	2x2 MIMO	LTE B30	10	9820	2355	4x4 MIMO	-	-	-	-	-	-	19.97	20.00
CA [2A]-[66C]	LTE B12	10	23095	707.5	16QAM	1	0	5095	737.5	2x2 MIMO	LTE B66	20	66786	2145	4x4 MIMO	LTE B66	20	66984	2164.8	4x4 MIMO	-	-	-	-	-	-	19.95	20.00
CA [2A]-[66A]-66A	LTE B12	10	23095	707.5	16QAM	1	0	5095	737.5	2x2 MIMO	LTE B66	20	66786	2145	4x4 MIMO	LTE B66	20	67236	2150	2x2 MIMO	-	-	-	-	-	-	19.94	20.00
CA [2A]-[30A]-66A	LTE B12	10	23095	707.5	16QAM	1	0	5095	737.5	2x2 MIMO	LTE B30	10	9820	2355	4x4 MIMO	LTE B66	20	66786	2145	2x2 MIMO	-	-	-	-	-	-	19.95	20.00
CA [2A]-2A-12B	LTE B12	5	23095	707.5	QPSK	1	0	5095	737.5	2x2 MIMO	LTE B12	5	5047	732.7	2x2 MIMO	LTE B2	20	900	1960	4x4 MIMO	LTE B2	20	700	1940	2x2 MIMO	19.94	19.98	
CA [2A]-4A-12B	LTE B12	5	23095	707.5	QPSK	1	0	5095	737.5	2x2 MIMO	LTE B12	5	5047	732.7	2x2 MIMO	LTE B2	20	900	1960	4x4 MIMO	LTE B4	20	2175	2132.5	2x2 MIMO	19.90	19.98	
CA [2A]-[4A]-12B	LTE B12	5	23095	707.5	QPSK	1	0	5095	737.5	2x2 MIMO	LTE B12	5	5047	732.7	2x2 MIMO	LTE B2	20	900	1960	2x2 MIMO	LTE B4	20	2175	2132.5	4x4 MIMO	19.88	19.98	
CA [2A]-12A-66C	LTE B12	10	23095	707.5	16QAM	1	0	5095	737.5	2x2 MIMO	LTE B2	20	900	1960	4x4 MIMO	LTE B66	20	66786	2145	2x2 MIMO	LTE B66	20	66984	2164.8	2x2 MIMO	19.89	20.00	
CA [4A]-4A-12B	LTE B12	5	23095	707.5	QPSK	1	0	5095	737.5	2x2 MIMO	LTE B12	5	5047	732.7	2x2 MIMO	LTE B4	20	2175	2132.5	4x4 MIMO	LTE B4	10	2350	2150	2x2 MIMO	19.89	19.98	

1.4.4 LTE Band 17 as PCC

Table 55
Output Powers – Ant 1

Combination	PCC Band	PCC										SCC 1				Power	
		PCC BW [MHz]	PCC (UL) Ch.	PCC (UL) Freq. [MHz]	Mod.	PCC UL RB	PCC UL RB Offset	PCC (DL) Ch.	PCC (DL) Freq. [MHz]	DL Ant. Config.	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	DL Ant. Config.	LTE Tx Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA [2A]-17A	LTE B17	10	23790	710	QPSK	1	49	5790	740	2x2 MIMO	LTE B2	10	900	1960	4x4 MIMO	19.62	19.67
CA [4A]-17A	LTE B17	10	23790	710	QPSK	1	49	5790	740	2x2 MIMO	LTE B4	10	2175	2132.5	4x4 MIMO	19.61	19.67

FCC ID: BCGA2013		SAR EVALUATION REPORT	Reviewed by: Quality Manager
Test Dates: 08/08/18 - 09/03/18	DUT Type: Tablet Device		APPENDIX H: Page 19 of 38

Table 95
Output Powers – Ant 4A

Combination	PCC										SCC 1				SCC 2				SCC 3				Power					
	PCC Band	PCC BW [MHz]	PCC (UL) Freq. [MHz]	Mod.	PCC UL RB	PCC UL RB Offset	PCC (DL) Ch.	PCC (DL) Freq. [MHz]	DL Ant. Config.	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	DL Ant. Config.	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	DL Ant. Config.	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	DL Ant. Config.	LTE Tx Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)		
CA 41A-41A (1)	LTE B41 PC2	20	39750	2506	QPSK	1	99	39750	2506	4x4 MIMO	LTE B41 PC2	20	41490	2680	2x2 MIMO	-	-	-	-	-	-	-	-	-	-	14.47	14.50	
CA 41A-41A (1)	LTE B41 PC2	20	39750	2506	QPSK	1	99	39750	2506	2x2 MIMO	LTE B41 PC2	20	41490	2680	4x4 MIMO	-	-	-	-	-	-	-	-	-	-	14.45	14.50	
CA 41A-41C	LTE B41 PC2	20	39750	2506	QPSK	1	99	39750	2506	4x4 MIMO	LTE B41 PC2	20	41292	2660.2	2x2 MIMO	LTE B41 PC2	20	41490	2680	2x2 MIMO	-	-	-	-	-	-	14.50	14.50
CA 41A-41C	LTE B41 PC2	20	39750	2506	QPSK	1	99	39750	2506	2x2 MIMO	LTE B41 PC2	20	41292	2660.2	4x4 MIMO	LTE B41 PC2	20	41490	2680	4x4 MIMO	-	-	-	-	-	-	14.48	14.50
CA 41C-41A	LTE B41 PC2	20	39750	2506	QPSK	1	99	39750	2506	2x2 MIMO	LTE B41 PC2	20	39948	2525.8	2x2 MIMO	LTE B41 PC2	20	41490	2680	4x4 MIMO	-	-	-	-	-	-	14.49	14.50
CA 41C-41A	LTE B41 PC2	20	39750	2506	QPSK	1	99	39750	2506	4x4 MIMO	LTE B41 PC2	20	39948	2525.8	4x4 MIMO	LTE B41 PC2	20	41490	2680	2x2 MIMO	-	-	-	-	-	-	14.48	14.50
CA 41A-41D	LTE B41 PC2	20	39750	2506	QPSK	1	99	39750	2506	4x4 MIMO	LTE B41 PC2	20	41094	2640.4	2x2 MIMO	LTE B41 PC2	20	41292	2660.2	2x2 MIMO	LTE B41 PC2	20	41490	2680	2x2 MIMO	14.47	14.50	
CA 41D-41A	LTE B41 PC2	20	39750	2506	QPSK	1	99	39750	2506	2x2 MIMO	LTE B41 PC2	20	39948	2525.8	2x2 MIMO	LTE B41 PC2	20	40146	2545.6	2x2 MIMO	LTE B41 PC2	20	41490	2680	4x4 MIMO	14.50	14.50	

Table 96
Output Powers – Ant 4B

Combination	PCC Band	PCC										SCC 1				SCC 2				SCC 3				Power				
		PCC BW [MHz]	PCC (UL) Freq. [MHz]	Mod.	PCC UL RB	PCC UL RB Offset	PCC (DL) Ch.	PCC (DL) Freq. [MHz]	DL Ant. Config.	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	DL Ant. Config.	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	DL Ant. Config.	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	DL Ant. Config.	LTE Tx Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)		
CA 41A-41A (1)	LTE B41 PC2	20	40185	2549.5	QPSK	1	0	40185	2549.5	4x4 MIMO	LTE B41 PC2	20	41890	2680	2x2 MIMO	-	-	-	-	-	-	-	-	-	-	15.00	15.00	
CA 41A-41A (1)	LTE B41 PC2	20	40185	2549.5	QPSK	1	0	40185	2549.5	2x2 MIMO	LTE B41 PC2	20	41890	2680	4x4 MIMO	-	-	-	-	-	-	-	-	-	-	14.94	15.00	
CA 41A-41C	LTE B41 PC2	20	40185	2549.5	QPSK	1	0	40185	2549.5	4x4 MIMO	LTE B41 PC2	20	41292	2660.2	2x2 MIMO	LTE B41 PC2	20	41490	2680	2x2 MIMO	-	-	-	-	-	-	15.00	15.00
CA 41C-41A	LTE B41 PC2	20	40185	2549.5	QPSK	1	0	40185	2549.5	2x2 MIMO	LTE B41 PC2	20	41292	2660.2	4x4 MIMO	LTE B41 PC2	20	41490	2680	4x4 MIMO	-	-	-	-	-	-	15.00	15.00
CA 41C-41A	LTE B41 PC2	20	40185	2549.5	QPSK	1	0	40185	2549.5	2x2 MIMO	LTE B41 PC2	20	40383	2569.3	2x2 MIMO	LTE B41 PC2	20	41490	2680	4x4 MIMO	-	-	-	-	-	-	14.99	15.00
CA 41C-41A	LTE B41 PC2	20	40185	2549.5	QPSK	1	0	40185	2549.5	4x4 MIMO	LTE B41 PC2	20	40383	2569.3	4x4 MIMO	LTE B41 PC2	20	41490	2680	2x2 MIMO	-	-	-	-	-	-	14.99	15.00
CA 41A-41D	LTE B41 PC2	20	40185	2549.5	QPSK	1	0	40185	2549.5	4x4 MIMO	LTE B41 PC2	20	41094	2640.4	2x2 MIMO	LTE B41 PC2	20	41292	2660.2	2x2 MIMO	LTE B41 PC2	20	41490	2680	2x2 MIMO	15.00	15.00	
CA 41D-41A	LTE B41 PC2	20	40185	2549.5	QPSK	1	0	40185	2549.5	2x2 MIMO	LTE B41 PC2	20	40383	2569.3	2x2 MIMO	LTE B41 PC2	20	40581	2589.3	2x2 MIMO	LTE B41 PC2	20	41490	2680	4x4 MIMO	14.96	15.00	

1.5 Downlink Carrier Aggregation with CA_41C and & CA_7C Uplink Carrier Aggregation enabled

This device supports uplink carrier aggregation (ULCA) for CA_41C with additional Carrier Aggregation configurations active in the downlink. Power measurements were performed with ULCA CA_41C active and additional CA configurations active in the downlink for the configuration required for ULCA CA_41C per Fall 2017 TCB Workshop Notes.

Per FCC Guidance, additional SAR measurements for these configurations were not required since their maximum output power was not more than 0.25 dB higher than the maximum output power for ULCA with only CA_41C active.

1.5.1 DL Carrier Aggregation RF Conducted Powers

Table 97
Output Powers – Ant 2A

Combination	PCC										SCC1				SCC2				SCC3				SCC4				Power	
	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL RB	SCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC DL Channel	SCC DL Frequency [MHz]	SCC Band	SCC Bandwidth [MHz]	SCC DL Channel	SCC DL Frequency [MHz]	SCC Band	SCC Bandwidth [MHz]	SCC DL Channel	SCC DL Frequency [MHz]	ULCA Tx Power with add'l CA configuration active in DL (dBm)	ULCA Tx Power (dBm)	
CA 41C-41A	LTE B41	20	39750	2506	QPSK	1	99	LTE B41	20	39948	2525.8	QPSK	1	0	LTE B41	20	41490	2680									14.22	14.27
CA 41D	LTE B41	20	39750	2506	QPSK	1	99	LTE B41	20	39948	2525.8	QPSK	1	0	LTE B41	20	40246	2545.6									14.24	14.27
CA 41E	LTE B41	20	39750	2506	QPSK	1	99	LTE B41	20	39948	2525.8	QPSK	1	0	LTE B41	20	40146	2545.6	LTE B41	20	40344	2565.4					14.23	14.27
CA 41C-41C	LTE B41	20	39750	2506	QPSK	1	99	LTE B41	20	39948	2525.8	QPSK	1	0	LTE B41	20	41292	2660.2	LTE B41	20	41490	2680					14.25	14.27
CA 41D-41A	LTE B41	20	39750	2506	QPSK	1	99	LTE B41	20	39948	2525.8	QPSK	1	0	LTE B41	20	40246	2545.6	LTE B41	20	41490	2680					14.22	14.27
CA 41C-41D	LTE B41	20	39750	2506	QPSK	1	99	LTE B41	20	39948	2525.8	QPSK	1	0	LTE B41	20	41292	2660.2	LTE B41	20	41490	2680					14.23	14.27
CA 41D-41C	LTE B41	20	39750	2506	QPSK	1	99	LTE B41	20	39948	2525.8	QPSK	1	0	LTE B41	20	40146	2545.6	LTE B41	20	41292	2660.2	LTE B41	20	41490	2680	14.27	14.27

Table 98
Output Powers – Ant 2B

Combination	PCC						SCC1						SCC2						SCC3						Power			
	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	Modulation	PCC UL RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL RB	SCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC DL Channel	SCC DL Frequency [MHz]	SCC Band	SCC Bandwidth [MHz]	SCC DL Channel	SCC DL Frequency [MHz]	SCC Band	SCC Bandwidth [MHz]	SCC DL Channel	SCC DL Frequency [MHz]	ULCA Tx Power with add'l CA configuration active in DL (dBm)	ULCA Tx Power (dBm)	
CA 41C-41A	LTE B41	20	40620	2593	QPSK	1	0	LTE B41	20	40422	2573.2	QPSK	1	99	LTE B41	20	41490	2680	-	-	-	-	-	-	-	-	13.94	13.95
CA 41D	LTE B41	20	40620	2593	QPSK	1	0	LTE B41	20	40422	2573.2	QPSK	1	99	LTE B41	20	40818	2612.8	-	-	-	-	-	-	-	-	13.88	13.95
CA 41E	LTE B41	20	40620	2593	QPSK	1	0	LTE B41	20	40422	2573.2	QPSK	1	99	LTE B41	20	40818	2612.8	LTE B41	20	41016	2632.6	-	-	-	-	13.92	13.95
CA 41C-41C	LTE B41	20	40620	2593	QPSK	1	0	LTE B41	20	40422	2573.2	QPSK	1	99	LTE B41	20	41292	2660.2	LTE B41	20	41490	2680	-	-	-	-	13.91	13.95
CA 41D-41A	LTE B41	20	40620	2593	QPSK	1	0	LTE B41	20	40422	2573.2	QPSK	1	99	LTE B41	20	40818	2612.8	LTE B41	20	41490	2680	-	-	-	-	13.90	13.95
CA 41C-41D	LTE B41	20	40620	2593	QPSK	1	0	LTE B41	20	40422	2573.2	QPSK	1	99	LTE B41	20	41094	2640.4	LTE B41	20	41292	2660.2	LTE B41	20	41490	2680	13.93	13.95
CA 41D-41C	LTE B41	20	40620	2593	QPSK	1	0	LTE B41	20	40422	2573.2	QPSK	1	99	LTE B41	20	40818	2612.8	LTE B41	20	41292	2660.2	LTE B41	20	41490	2680	13.88	13.95

FCC ID: BCGA2013		SAR EVALUATION REPORT	Reviewed by: Quality Manager
Test Dates: 08/08/18 - 09/03/18	DUT Type: Tablet Device		APPENDIX H: Page 36 of 38

1.5.2.2

LTE Band 7

Table 105
Output Powers – Ant 2A

	PCC										SCC										Power	
Combination	PCC Band	PCC Bandwidth [MHz]	PCC UL Channel	PCC UL Frequency [MHz]	PCC DL Channel	PCC DL Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	DL Ant. Config.	SCC Band	SCC Bandwidth [MHz]	SCC UL Channel	SCC UL Frequency [MHz]	SCC DL Channel	SCC DL Frequency [MHz]	Modulation	SCC UL RB	SCC UL RB Offset	DL Ant. Config.	ULCA Tx. Power with add'l CA configuration active in dl (dbm)	ULCA Tx. Power (dbm)
CA_7C] (1)	LTE B7	20	21100	2535.0	3100	2655.0	QPSK	50	0	4x4 MIMO	LTE B7	20	20902	2515.2	2902	2635.2	QPSK	50	50	4x4 MIMO	11.97	11.99

Table 106
Output Powers – Ant 2B

	PCC										SCC										Power	
Combination	PCC Band	PCC Bandwidth [MHz]	PCC UL Channel	PCC UL Frequency [MHz]	PCC DL Channel	PCC DL Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	DL Ant. Config.	SCC Band	SCC Bandwidth [MHz]	SCC UL Channel	SCC UL Frequency [MHz]	SCC DL Channel	SCC DL Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	DL Ant. Config.	ULCA Tx. Power with add'l CA configuration active in DL (dbm)	ULCA Tx. Power (dbm)
CA_7C] (1)	LTE B7	20	21100	2535.0	3100	2655.0	QPSK	1	0	4x4 MIMO	LTE B7	20	20902	2515.2	2902	2635.2	QPSK	1	99	4x4 MIMO	12.29	12.26

Table 107
Output Powers – Ant 4A

	PCC										SCC										Power	
Combination	PCC Band	PCC Bandwidth [MHz]	PCC UL Channel	PCC UL Frequency [MHz]	PCC DL Channel	PCC DL Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	DL Ant. Config.	SCC Band	SCC Bandwidth [MHz]	SCC UL Channel	SCC UL Frequency [MHz]	SCC DL Channel	SCC DL Frequency [MHz]	Modulation	SCC UL #RB	SCC UL RB Offset	DL Ant. Config.	ULCA Tx. Power with add'l CA configuration active in DL (dBm)	ULCA Tx. Power (dBm)
CA_7C] (1)	LTE B7	20	21100	2535.0	3100	2655.0	QPSK	100	0	4x4 MIMO	LTE B7	20	20902	2515.2	2902	2635.2	QPSK	100	0	4x4 MIMO	11.67	11.59

Table 108
Output Powers – Ant 4B

	PCC										SCC										Power	
Combination	PCC Band	PCC Bandwidth [MHz]	PCC UL Channel	PCC UL Frequency [MHz]	PCC DL Channel	PCC DL Frequency [MHz]	Modulation	PCC UL RB	PCC UL RB Offset	DL Ant. Config.	SCC Band	SCC Bandwidth [MHz]	SCC UL Channel	SCC UL Frequency [MHz]	SCC DL Channel	SCC DL Frequency [MHz]	Modulation	SCC UL RB	SCC UL RB Offset	DL Ant. Config.	ULCA Tx. Power with add'l CA configuration active in DL (dBm)	ULCA Tx. Power (dBm)
CA_7C] (1)	LTE B7	20	21350	2560.0	3350	2680.0	QPSK	1	0	4x4 MIMO	LTE B7	20	21152	2540.2	3152	2660.2	QPSK	1	99	4x4 MIMO	11.60	11.62

FCC ID: BCGA2013	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	Reviewed by: Quality Manager
Test Dates: 08/08/18 - 09/03/18	DUT Type: Tablet Device		APPENDIX H: Page 38 of 38