



FCC Part 1 Subpart I  
FCC Part 2 Subpart J

**CERTIFICATION TEST REPORT**

**FOR**

**MAGNETIC CHARGING CABLE**

**MODEL NO: A2055**

**FCC ID: BCGA2055**

**REPORT NUMBER: 12486400-E2V3**

**ISSUE DATE: SEPTEMBER 07, 2018**

*Prepared for*  
**APPLE INC.**  
**1 APPLE PARK WAY**  
**CUPERTINO, CA 95014, U.S.A**

*Prepared by*  
**UL VERIFICATION SERVICES INC.**  
**47173 BENICIA STREET**  
**FREMONT, CA 94538, U.S.A.**  
**TEL: (510) 771-1000**  
**FAX: (510) 661-0888**



Revision History

Rev.	Issue Date	Revisions	Revised By
V1	08/30/2018	Initial Issue	Chin Pang
V2	09/05/2018	Address TCB Questions	Jingang Li
V3	09/07/2018	Correction on page 12	Chin Pang

## TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS .....	4
2. TEST METHODOLOGY .....	5
3. FACILITIES AND ACCREDITATION .....	5
4. EQUIPMENT UNDER TEST .....	6
4.1. DESCRIPTION OF EUT .....	6
4.2. KDB 680106 D01 SECTION 5b EQUIPMENT APPROVAL CONSIDERATIONS.....	6
4.3. DESCRIPTION OF TEST SETUP.....	7
5. TEST AND MEASUREMENT EQUIPMENT .....	10
6. DUTY CYCLE.....	11
7. MAXIMUM PERMISSIBLE RF EXPOSURE.....	13
7.1. FCC LIMITS AND SUMMARY .....	13
7.1.1. FCC LIMITS.....	13
7.1.2. FCC SUMMARY OF RESULTS.....	14
7.2. TEST RESULTS .....	15
7.2.1. FCC RF EXPOSURE .....	15
8. SETUP PHOTO .....	16

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** APPLE INC.  
1 APPLE PARK WAY  
CUPERTINO, CA 95014, U.S.A

**EUT DESCRIPTION:** MAGNETIC CHARGING CABLE

**MODEL NUMBER:** A2055

**SERIAL NUMBER:** DLC826400VRJL5F4D, DLC831500J0L41Y1W

**DATE TESTED:** AUGUST 17-22, 2018

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 1 SUBPART I & PART 2 SUBPART J	Complies

UL Verification Services Inc. calculated the RF Exposure of the above equipment in accordance with the requirements set forth in the above standards, using test results reported in the test report documents referenced below and/or documentation furnished by the applicant. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations of these calculations. The results show that the equipment is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Reviewed By:



Chin Pang  
Senior Engineer  
UL Verification Service Inc.

Prepared By:



Tony Wang  
Test Engineer  
UL Verification Services Inc.

## 2. TEST METHODOLOGY

All calculations were made in accordance with FCC OET Bulletin 65 Edition 97-01.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A (IC:2324B-1)	<input type="checkbox"/> Chamber D (IC:22541-1)
<input type="checkbox"/> Chamber B (IC:2324B-2)	<input type="checkbox"/> Chamber E (IC:22541-2)
<input type="checkbox"/> Chamber C (IC:2324B-3)	<input type="checkbox"/> Chamber F (IC:22541-3)
<input type="checkbox"/> Immunity Area	<input type="checkbox"/> Chamber G (IC:22541-4)
	<input type="checkbox"/> Chamber H (IC:22541-5)
	<input checked="" type="checkbox"/> Temperature B Room

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through H are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-8, respectively.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at [NVLAP Lab Search](#).

## 4. EQUIPMENT UNDER TEST

### 4.1. DESCRIPTION OF EUT

The EUT is a magnetic charging cable which has a single inductive charging coil to charge Apple Watch. The charging frequency is 326.5 kHz, and the maximum power consumption is 5W in charging status.

### 4.2. KDB 680106 D01 SECTION 5b EQUIPMENT APPROVAL CONSIDERATIONS

Requirement	Device
(1) Power transfer frequency is less than 1 MHz.	Yes. Operating Frequency is 326.5KHz
(2) Output power from each primary coil is less than or equal to 15 watts.	Yes. The maximum power is 5 Watts
(3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.	Yes. The system includes one single primary and secondary coil and the device is designed to charge a single client
(4) Client device is placed directly in contact with the transmitter.	Yes. The client device is placed directly in contact with the transmitter.
(5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	Yes. Mobile exposure condition apply.
(6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.	Yes. The worst case aggregate fields at 15cm from the device is 1.35% of the FCC H field limit.

### 4.3. DESCRIPTION OF TEST SETUP

#### SUPPORT EQUIPMENT

SUPPORT EQUIPMENT & PERIPHERALS LIST				
Description	Housing/Watch Band	Manufacturer	Model	Serial Number
Watch (big)	Stainless Steel/Milanese Loop	Apple	A1976	D92WV001K47J
AC/DC Adapter	N/A	Apple	A1718	N/A

#### I/O CABLES

N/A

#### TEST SETUP


The following two configurations are tested:

Configuration	Mode	Descriptions
1	Standby	EUT Alone powered by AC/DC adapter
2	Operating (Watch, ~10% Power Charging)	EUT and Watch powered by AC/DC adapter
	Operating (Watch, ~50% Power Charging) <u>Note:</u> For the configuration 2 operating with Watch, battery level of the Watch was at a state of 20 – 50%.	EUT and Watch powered by AC/DC adapter
	Operating (Watch, >90% Power Charging)	EUT and Watch powered by AC/DC adapter


#### MEASUREMENT SETUP

The measurement was taken using a probe placed 15 cm surrounding the device and 20 cm above the top surface of the EUT. Measurements were taken from the top and all sides of the EUT per KDB680106 D01 v03.

**CONFIGURATION 1**

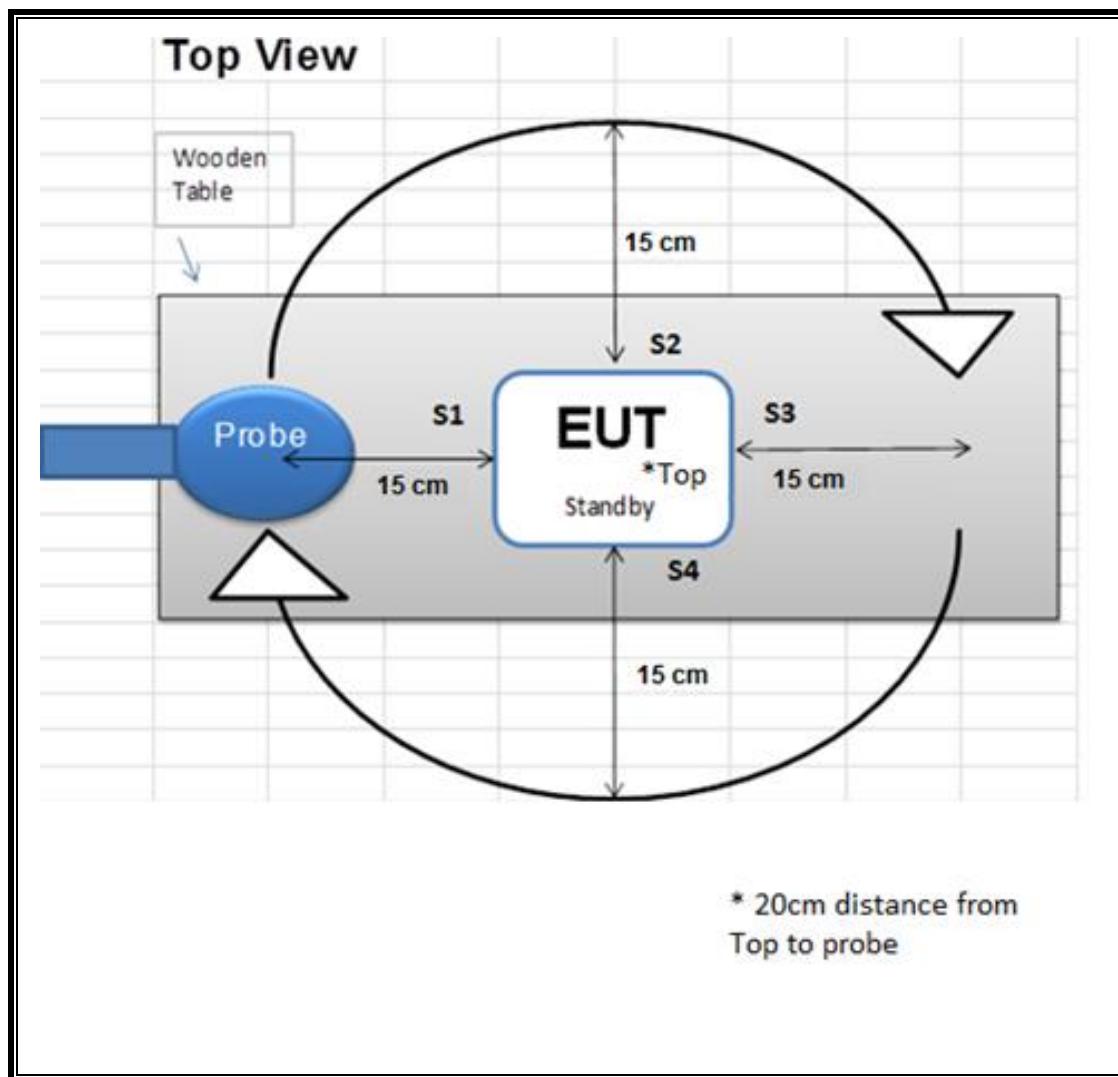

## **CONFIGURATION 2**

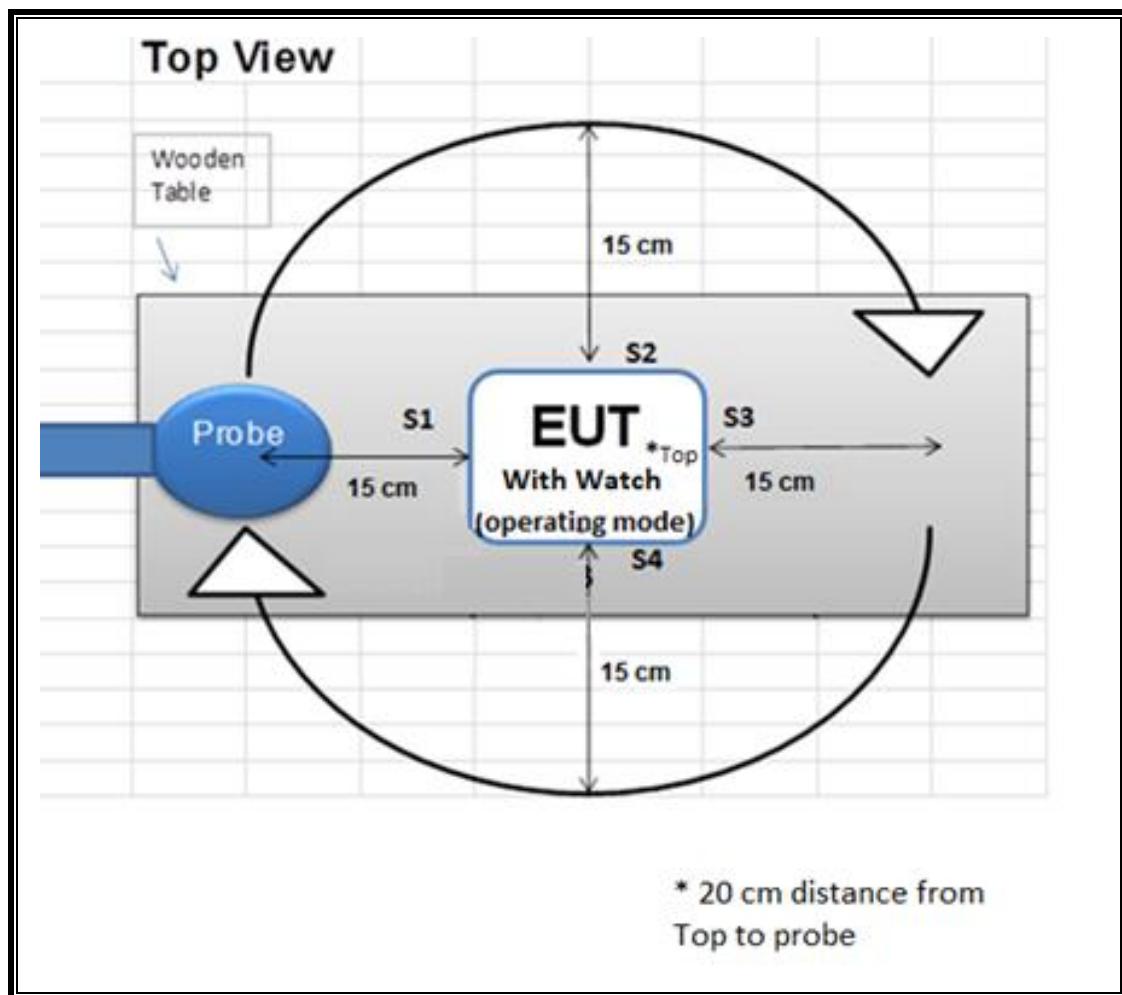

## 5. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was used for the tests documented in this report:

Test Equipment List					
Description	Manufacturer	Model	S/N	Cal Date	Cal Due
Electric and Magnetic Field Probe	Narda	EHP-200A	170WX80318	04/06/2018	04/06/19

## 6. DUTY CYCLE

### LIMITS



None; for reporting purposes only.

### PROCEDURE

Zero-Span Spectrum Analyzer Method.

### ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
Standby (Config 1)	12.00	200.10	0.06	6.00%	12.22
Operating(Config 2)	100.00	100.00	1.00	100.00%	0.00

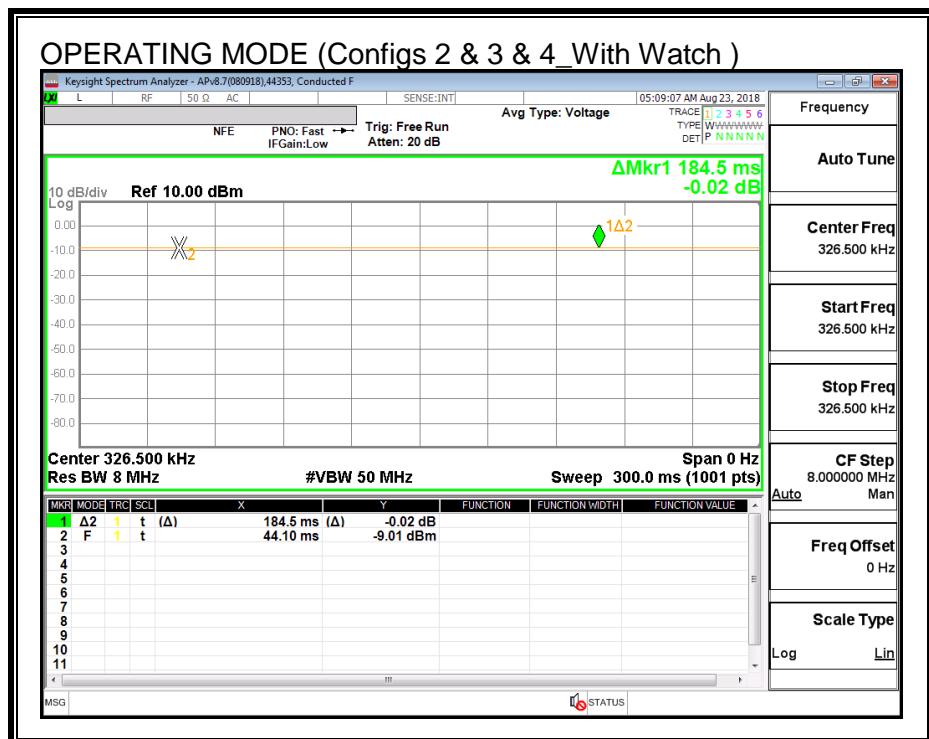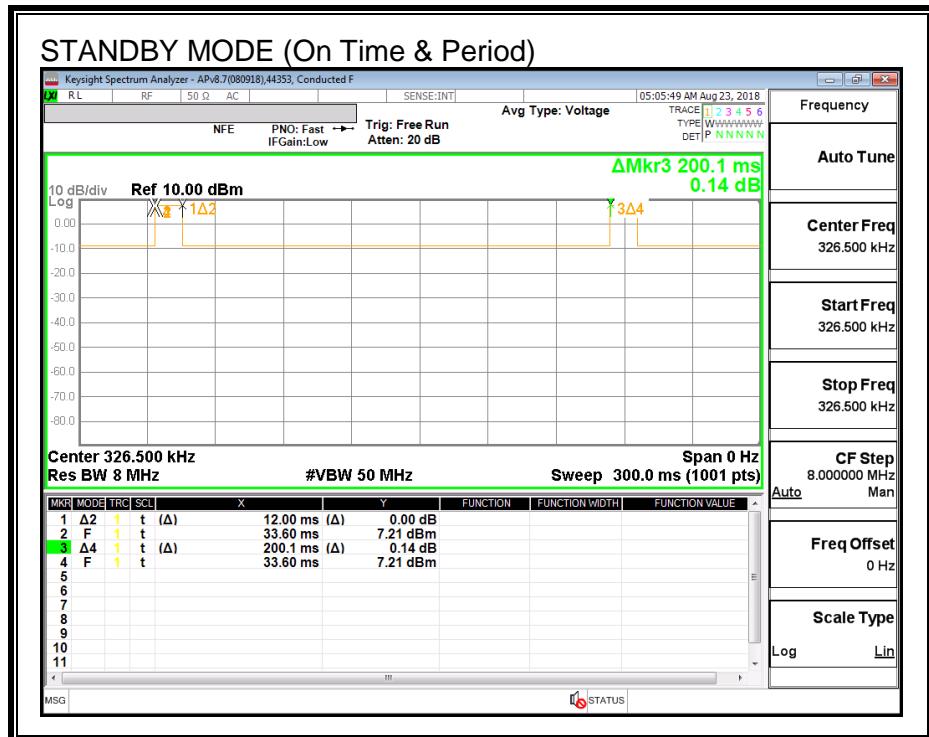

## 7. MAXIMUM PERMISSIBLE RF EXPOSURE

### 7.1. FCC LIMITS AND SUMMARY

#### 7.1.1. FCC LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0 .....	614	1.63	*(100)	6
3.0–30 .....	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300 .....	61.4	0.163	1.0	6
300–1500 .....	.....	.....	f/300	6
1500–100,000 .....	.....	.....	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34 .....	614	1.63	*(100)	30
1.34–30 .....	824/f	2.19/f	*(180/f <sup>2</sup> )	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
30–300 .....	27.5	0.073	0.2	30
300–1500 .....	.....	.....	f/1500	30
1500–100,000 .....	.....	.....	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

## 7.1.2. FCC SUMMARY OF RESULTS

### RESULTS

ID:	38602	Date:	8/14/18
-----	-------	-------	---------

### FCC RF Exposure Summary of Results

#### A2055/A1718/0.3m/USB-C/A1976

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure Limit	Maximum Average (A/m)	Percentage (%)
614	0.397	0.06%	1.63	0.018	1.10%

#### A2055/A1718/1.0m/USB-C/A1976

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure Limit	Maximum Average (A/m)	Percentage (%)
614	0.397	0.06%	1.63	0.022	1.35%

## 7.2. TEST RESULTS

### 7.2.1. FCC RF EXPOSURE

#### E- FIELD AND H- FIELD MEASUREMENTS

Note: Peak measurements were performed. RMS values were calculated from the peak measurement. Please refer to the formula for calculating the RMS values: [Field Strength x  $\sqrt{\text{Duty Cycle}}$ ].

#### A2055 WITH A1718, 0.3M CABLE USB-C AND MODEL A1976 WATCH

FCC RF Exposure Limit		Measuring Distance (cm)	Electric Field Limit (V/m)		Electric Field Reading (V/m)			FCC Average	Magnetic Field Limit (A/m)		Magnetic Field Reading (A/m)				
Configuration	Test Mode		FCC	Location	Peak	Duty Cycle %	FCC	Location	Peak	Duty Cycle %	FCC				
1	Standby	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.397	6.00	0.024	1.63	S1	0.017	6	0.001	0.001		
				S2	0.388		0.023		S2	0.017		0.001	0.001		
				S3	0.388		0.023		S3	0.017		0.014	0.014		
				S4	0.397		0.024		S4	0.017		0.001	0.001		
				Top	0.388		0.023		Top	0.019		0.001	0.001		
	Operating Real Product (Power <10% Charging)			Max	0.397		0.024		Max	0.020		0.001	0.001		
				S1	0.334	100.00	0.334		S1	0.016	100	0.016	0.016		
				S2	0.326		0.326		S2	0.015		0.015	0.015		
				S3	0.334		0.334		S3	0.015		0.015	0.015		
				S4	0.344		0.344		S4	0.014		0.014	0.014		
2	Operating Real Product (Power ~ 20% - 50% Charging)			Top	0.344		0.344		Top	0.014		0.014	0.014		
				Max	0.354		0.354		Max	0.017		0.017	0.017		
				S1	0.371	100.00	0.371		S1	0.017	100	0.017	0.017		
				S2	0.371		0.371		S2	0.018		0.018	0.018		
				S3	0.389		0.389		S3	0.017		0.017	0.017		
	Operating Real Product (Power >90% Charging)			S4	0.388		0.388		S4	0.017		0.017	0.017		
				Top	0.371		0.371		Top	0.017		0.017	0.017		
				Max	0.397		0.397		Max	0.018		0.018	0.018		
				S1	0.370	100.00	0.370		S1	0.017	100	0.017	0.017		
				S2	0.371		0.371		S2	0.016		0.016	0.016		
	Operating Real Product (Power ~ 20% - 50% Charging)			S3	0.364		0.364		S3	0.017		0.017	0.017		
				S4	0.362		0.362		S4	0.016		0.016	0.016		
				Top	0.361		0.361		Top	0.017		0.017	0.017		
				Max	0.388		0.388		Max	0.018		0.018	0.018		

#### A2055 WITH A1718, 1M CABLE USB-C AND MODEL A1976 WATCH

FCC RF Exposure Limit		Measuring Distance (cm)	Electric Field Limit (V/m)		Electric Field Reading (V/m)			FCC Average	Magnetic Field Limit (A/m)		Magnetic Field Reading (A/m)				
Configuration	Test Mode		FCC	Location	Peak	Duty Cycle %	FCC	Location	Peak	Duty Cycle %	FCC				
1	Standby	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.388	6.00	0.023	1.63	S1	0.017	6	0.001	0.001		
				S2	0.388		0.023		S2	0.016		0.001	0.001		
				S3	0.371		0.022		S3	0.016		0.014	0.014		
				S4	0.380		0.023		S4	0.017		0.001	0.001		
				Top	0.371		0.022		Top	0.019		0.001	0.001		
	Operating Real Product (Power <10% Charging)			Max	0.388		0.023		Max	0.020		0.001	0.001		
				S1	0.368	100.00	0.368		S1	0.016	100	0.016	0.016		
				S2	0.368		0.368		S2	0.016		0.014	0.014		
				S3	0.371		0.371		S3	0.017		0.013	0.013		
				S4	0.381		0.381		S4	0.014		0.014	0.014		
2	Operating Real Product (Power ~ 20% - 50% Charging)			Top	0.388		0.388		Top	0.013		0.013	0.013		
				Max	0.397		0.397		Max	0.016		0.016	0.016		
				S1	0.388	100.00	0.388		S1	0.017	100	0.017	0.017		
				S2	0.388		0.388		S2	0.017		0.017	0.017		
				S3	0.381		0.381		S3	0.017		0.017	0.017		
	Operating Real Product (Power >90% Charging)			S4	0.388		0.388		S4	0.016		0.016	0.016		
				Top	0.388		0.388		Top	0.017		0.017	0.017		
				Max	0.397		0.397		Max	0.022		0.022	0.022		
				S1	0.388		0.388		S1	0.016		0.016	0.016		
				S2	0.371		0.371		S2	0.017		0.017	0.017		