



PCTEST
18855 Adams Court, Morgan Hill, CA 95037 USA
Tel. 410.290.6652 / Fax 410.290.6654
<http://www.pctest.com>



MEASUREMENT REPORT GSM/GPRS/EDGE/WCDMA

Applicant Name:

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

12/10/2019 - 02/11/2020

Test Site/Location:

PCTEST Morgan Hill, CA, USA

Test Report Serial No.:

1C1912170051-02.BCG

FCC ID:	BCGA2068
IC:	579C-A2068
APPLICANT:	Apple Inc.

Application Type:

Certification

Model/HVIN:

A2068

EUT Type:

Tablet Device

FCC Classification:

PCS Licensed Transmitter (PCB)

FCC Rule Part(s):

22, 24, & 27

ISED Specification:

RSS-132, RSS-133, RSS-139

Test Procedure(s):

ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Randy Ortanez
President





FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 1 of 113

T A B L E O F C O N T E N T S

1.0	INTRODUCTION	4
1.1	Scope	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Antenna Description	5
2.4	Test Support Equipment.....	6
2.5	Test Configuration.....	6
2.6	Software and Firmware	6
2.7	EMI Suppression Device(s)/Modifications	6
3.0	DESCRIPTION OF TESTS	7
3.1	Evaluation Procedure	7
3.2	Cellular - Base Frequency Blocks	7
3.3	Cellular - Mobile Frequency Blocks	7
3.4	PCS - Base Frequency Blocks	7
3.5	PCS - Mobile Frequency Blocks	8
3.6	AWS - Base Frequency Blocks	8
3.7	AWS - Mobile Frequency Blocks.....	8
3.8	Radiated Measurements	9
4.0	MEASUREMENT UNCERTAINTY	10
5.0	TEST EQUIPMENT CALIBRATION DATA	11
6.0	SAMPLE CALCULATIONS	12
7.0	TEST RESULTS.....	13
7.1	Summary.....	13
7.2	Occupied Bandwidth	14
7.3	Spurious and Harmonic Emissions at Antenna Terminal	19
7.4	Band Edge Emissions at Antenna Terminal	45
7.5	Peak-Average Ratio	55
7.6	Radiated Power (ERP/EIRP).....	60
7.6.1	Port A Radiated Power (ERP/EIRP).....	62
7.6.2	Port B Radiated Power (ERP/EIRP).....	63
7.6.3	Port C Radiated Power (ERP/EIRP).....	64
7.6.4	Port D Radiated Power (ERP/EIRP).....	65
7.7	Radiated Spurious Emissions Measurements	66
7.7.1	ANT 3 (Port A) Radiated Spurious Emissions Measurements	69
7.7.2	ANT 4b (Port A) Radiated Spurious Emissions Measurements	74
7.7.3	ANT 1 (Port B) Radiated Spurious Emissions Measurements	80
7.7.4	ANT 2b (Port B) Radiated Spurious Emissions Measurements	84
7.7.5	ANT 4a (Port C) Radiated Spurious Emissions Measurements	90
7.7.6	ANT 2a (Port D) Radiated Spurious Emissions Measurements	96
7.8	Frequency Stability / Temperature Variation	102
8.0	CONCLUSION.....	113

FCC ID: BCGA2068	 PCTEST		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 2 of 113	

MEASUREMENT REPORT

GSM/GPRS/EDGE/WCDMA

Mode	FCC Rule Part	Tx Frequency (MHz)	ERP		EIRP		Emission Designator
			Max. Power (W)	Max. Power (dBm)	Max. Power (W)	Max. Power (dBm)	
GPRS850	22H	824.2 - 848.8	1.038	30.16	1.702	32.31	246KGXW
EDGE850	22H	824.2 - 848.8	0.304	24.83	0.499	26.98	245KG7W
WCDMA850	22H	826.4 - 846.6	0.192	22.83	0.315	24.98	4M09F9W
WCDMA1700	27	1712.4 - 1752.6			0.224	23.50	4M09F9W
GPRS1900	24E	1850.2 - 1909.8			0.716	28.55	243KGXW
EDGE1900	24E	1850.2 - 1909.8			0.225	23.53	243KG7W
WCDMA1900	24E	1852.4 - 1907.6			0.224	23.50	4M08F9W

EUT Overview

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 3 of 113	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Morgan Hill, CA 95037, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: BCGA2068	 PCTEST		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 4 of 113	

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA2068**. The test data contained in this report pertains only to the emissions due to the EUT's 2G/3G licensed transmitters.

Test Device Serial No.: DLXZR02FP7GX, DLXZR037P7GX

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE, HDR4, HDR8)

This device supports BT Beamforming.

2.3 Antenna Description

Following antennas were used for the testing.

Frequency [MHz]	Antennas			
	Port A	Port B	Port C	Port D
820-960	ANT 3	ANT 1	N/A	
1700-1800				
1820-2100	ANT 4b	ANT 2b	ANT 4a	ANT 2a

Table 2-1. Antennas vs Ports

Frequency [MHz]	Antenna Gain (dBi)					
	ANT 3	ANT 1	ANT 4b	ANT 2b	ANT 4a	ANT 2a
820-960	-0.7	-0.6	N/A			
1700-1800	N/A		-2.2	-2.7	-1.5	-1.2
1820-2100			-2.2	-2.6	-1.7	-0.3

Table 2-2. Highest Antenna Gain

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 5 of 113



2.4 Test Support Equipment

1	Apple MacBook w/ AC/DC Adapter	Model: A1398 Model: A1435	S/N: C2QKP008F6F3 S/N: C04325505K1F288BG
2	Apple USB-C Cable	Model: Chimp	S/N: 304523
3	USB-C Cable w / AC/DC Adapter	Model: A1997 Model: A1720	S/N: N/A S/N: C3D9274B06YLHDAE
4	Apple Pencil	Model: A2051	S/N: GQXYGSXCJKM9
5	DC Power Supply	Model: KPS3010D	S/N N/A

Table 2-3. Test Support Equipment Used

2.5 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz were tested with the highest transmitting power channel and the worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

2.6 Software and Firmware

The test was conducted with firmware version 17E228 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 6 of 113


3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure


The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None


3.2 Cellular - Base Frequency Blocks

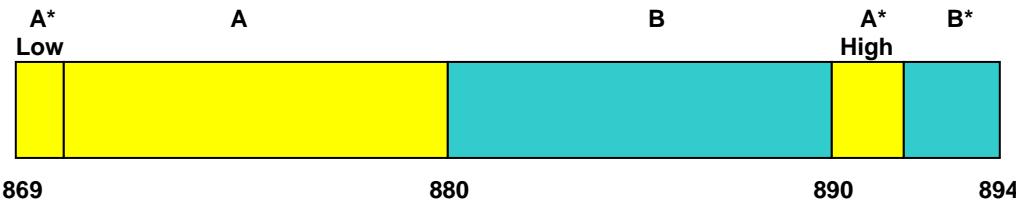

3.3 Cellular - Mobile Frequency Blocks

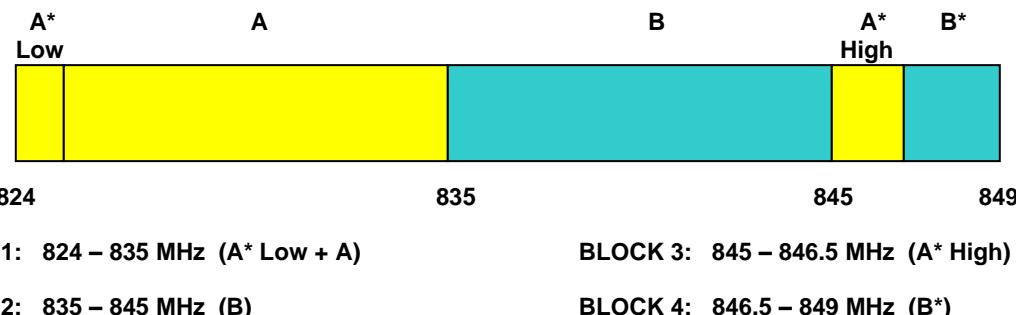


3.4 PCS - Base Frequency Blocks

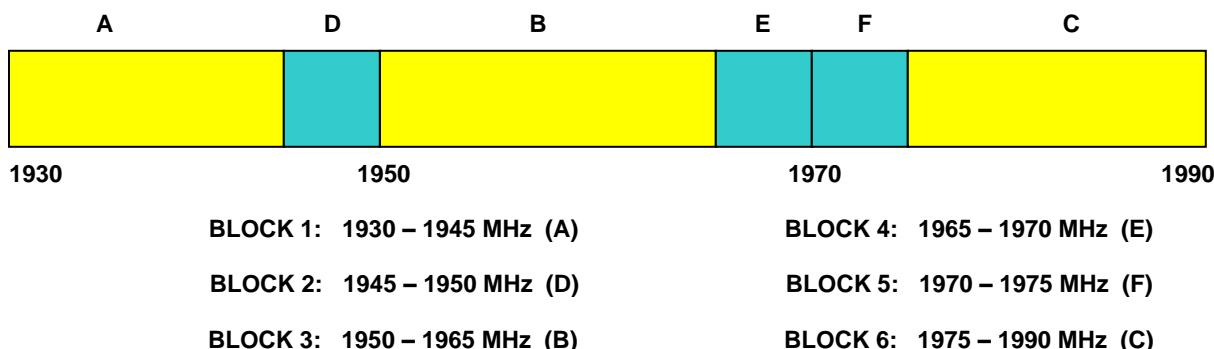


FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 7 of 113


3.5 PCS - Mobile Frequency Blocks

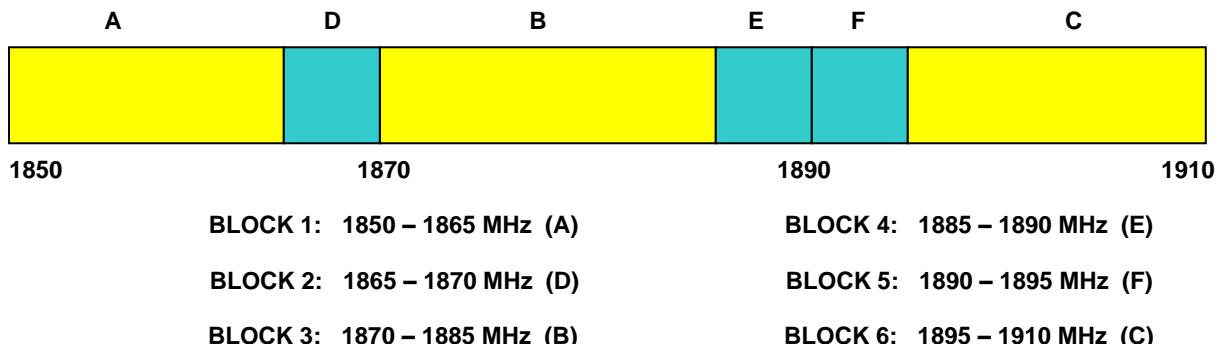

3.6 AWS - Base Frequency Blocks

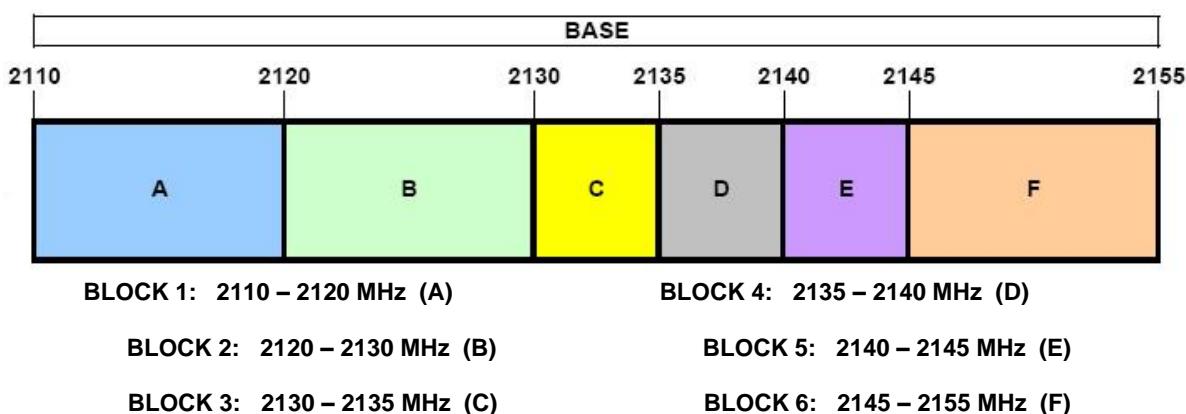

3.7 AWS - Mobile Frequency Blocks

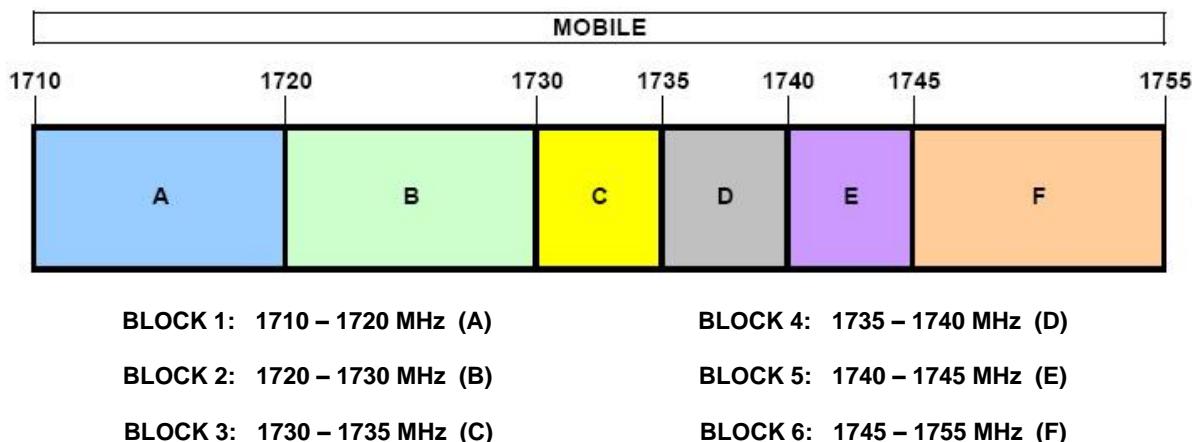

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 8 of 113

3.8 Radiated Measurements

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Per the guidelines of KDB 412172 D01 v01r01, radiated power levels are measured using the following formula:

$$\text{ERP or EIRP} = P_T + G_T - L_c$$

Where P_T is the transmitter output power, expressed in dBm, G_T is the gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP), and L_c signal attenuation in the connecting cable between the transmitter and antenna in dB.

Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [\text{dBm}] = P_g [\text{dBm}] - \text{cable loss } [\text{dB}] + \text{antenna gain } [\text{dBd/dBi}]$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g [\text{dBm}] - \text{cable loss } [\text{dB}]$. The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power } [\text{Watts}])$.

Radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-E-2016.

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 9 of 113

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.29
Radiated Disturbance (<1GHz)	4.15
Radiated Disturbance (>1GHz)	4.70
Radiated Disturbance (>18GHz)	5.01
Temperature	0.01

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 10 of 113

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	3/13/2019	Annual	3/13/2020	MY49430244
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	10/29/2019	Annual	10/29/2020	T058701-02
ESPEC	SU-241	Tabletop Temperature Chamber	9/3/2019	Annual	9/3/2020	92009574
ETS-Lindgren	3142E-PA	Pre-Amplifier (30MHz - 6GHz)	9/19/2019	Annual	9/19/2020	213236
ETS-Lindgren	3142E	BiConiLog Antenna (30MHz - 6GHz)	8/14/2019	Annual	8/14/2020	224569
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	3/12/2019	Annual	3/12/2020	205956
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	2/27/2019	Annual	2/27/2020	101619
Rohde & Schwarz	ESW26	EMI Test Receiver	5/21/2019	Annual	5/21/2020	101299
Rohde & Schwarz	ESW44	EMI Test Receiver	7/27/2019	Annual	7/27/2020	101668
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	4/20/2019	Annual	4/20/2020	161617
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	8/8/2019	Annual	8/8/2020	151888
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	9/19/2019	Annual	9/19/2020	100051
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Antenna (400MHz-18GHz)	11/14/2019	Annual	11/14/2020	101057
Rohde & Schwarz	HFH2-Z2	Loop Antenna	3/21/2019	Annual	3/21/2020	100519

Table 5-1. Test Equipment

Notes:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 11 of 113

6.0 SAMPLE CALCULATIONS

GPRS Emission Designator

Emission Designator = 250KGXW

GPRS BW = 250 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 250KG7W

EDGE BW = 250 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M16F9W

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: BCGA2068	 PCTEST [®]		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device		Page 12 of 113

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCGA2068
 FCC Classification: PCS Licensed Transmitter (PCB)
 Mode(s): GSM/GPRS/EDGE/WCDMA

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	RSS-Gen (4.6.1) RSS-133(2.3) RSS-139(2.3)	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
2.1051 22.917(a) 24.238(a) 27.53(h)	RSS-132(5.5) RSS-133(6.5) RSS-139(6.6)	Conducted Band Edge / Spurious Emissions	> $43 + \log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions		PASS	Sections 7.3, 7.4
24.232(d)	RSS-132(5.4) RSS-133(6.4) RSS-139(6.5)	Peak-Average Ratio	< 13 dB		PASS	Section 7.5
2.1046	RSS-132(5.4) RSS-133(4.1) RSS-139(4.1)	Transmitter Conducted Output Power	N/A		PASS	Section 7.6
2.1055 22.355 24.235 27.54	RSS-132(5.3) RSS-133(6.3) RSS-139(6.4)	Frequency Stability	< 2.5 ppm (Part 22) Emission must remain in band (Part 24, 27)		PASS	Section 7.8
22.913(a)(5)	RSS-132(5.4)	Effective Radiated Power	< 7 Watts max. ERP		PASS	Section 7.6
24.232(c)	RSS-133(6.4)	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS	Section 7.6
27.50(d)(4)	RSS-139(6.5)	Equivalent Isotropic Radiated Power	< 1 Watts max. EIRP		PASS	Section 7.6
2.1053 22.917(a) 24.238(a) 27.53(h)	RSS-132(5.5) RSS-133(6.5) RSS-139(6.6)	Radiated Spurious Emissions	> $43 + \log_{10}(P[\text{Watts}])$ for all out-of-band emissions	RADIATED	PASS	Section 7.7

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "2G/3G Automation," Version 4.2.
- 5) All ports were investigated and only the worst case data were reported.

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 13 of 113

7.2 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

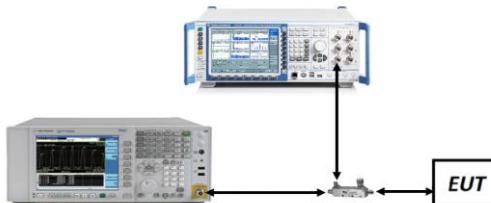


Figure 7-1. Test Instrument & Measurement Setup

Test Notes

1. All ports were tested and only the worst case data were reported.
2. Refer to Table 2-1 Section 2.3 of this test report for correlation between Antennas and Ports.

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 14 of 113

Mode	Occupied Bandwidth [kHz]
GPRS850	245.66
EDGE850	244.69
WCDMA850	4092.03
WCDMA1700	4087.29
GPRS1900	243.14
EDGE1900	242.65
WCDMA1900	4083.58

Table 7-2. Occupied Bandwidth Results



Plot 7-1. Occupied Bandwidth Plot (Cellular GPRS Mode)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 15 of 113



Plot 7-2. Occupied Bandwidth Plot (EDGE850 Mode)



Plot 7-3. Occupied Bandwidth Plot (PCS GPRS Mode)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 16 of 113



Plot 7-4. Occupied Bandwidth Plot (EDGE1900 Mode)



Plot 7-5. Occupied Bandwidth Plot (Cellular WCDMA Mode)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 17 of 113	



Plot 7-6. Occupied Bandwidth Plot (AWS WCDMA Mode)



Plot 7-7. Occupied Bandwidth Plot (PCS WCDMA Mode)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 18 of 113

7.3 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{\text{Watts}})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz for Cell, 20GHz for AWS, 20GHz for PCS (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

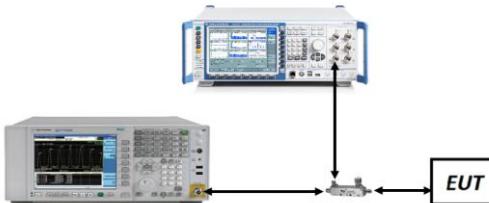



Figure 7-2. Test Instrument & Measurement Setup

Test Notes


1. Per 24.238(b), 27.53(h)(3), and RSS-133(6.5), RSS-139(6.5), compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 1MHz, and 100 kHz or greater for Part 22 and RSS-132 measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
2. All ports were tested and only the worst case data were reported.
3. Refer to Table 2-1 Section 2.3 of this test report for correlation between Antennas and Ports.

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 19 of 113

Cellular GPRS Mode

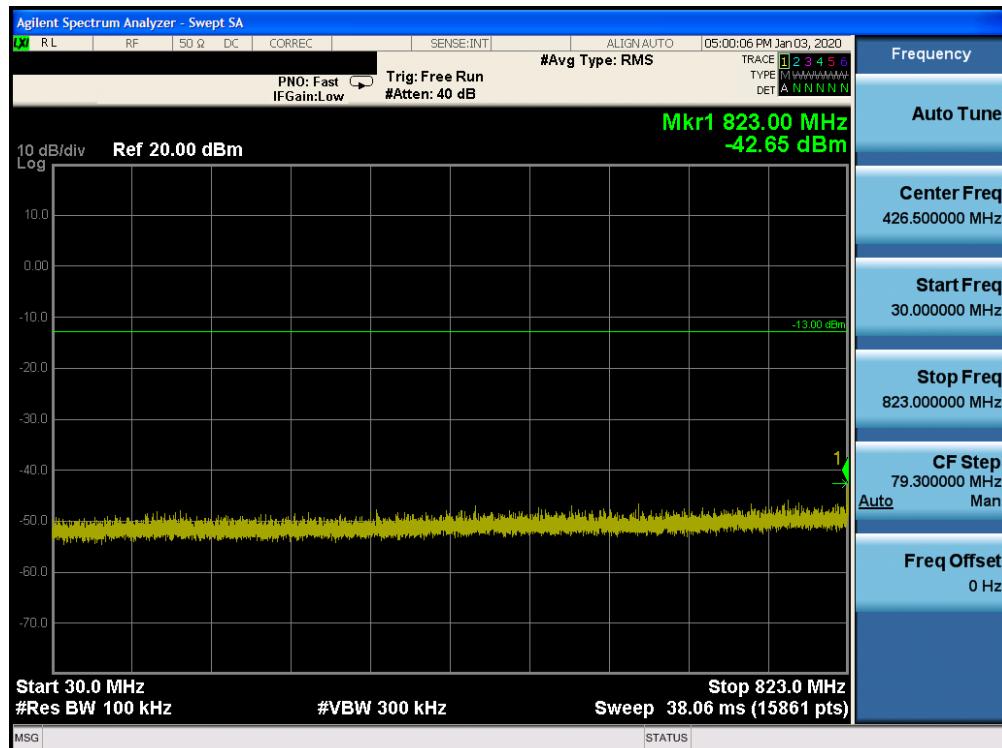


Plot 7-8. Conducted Spurious Plot (Cellular GPRS Mode - Low Channel)

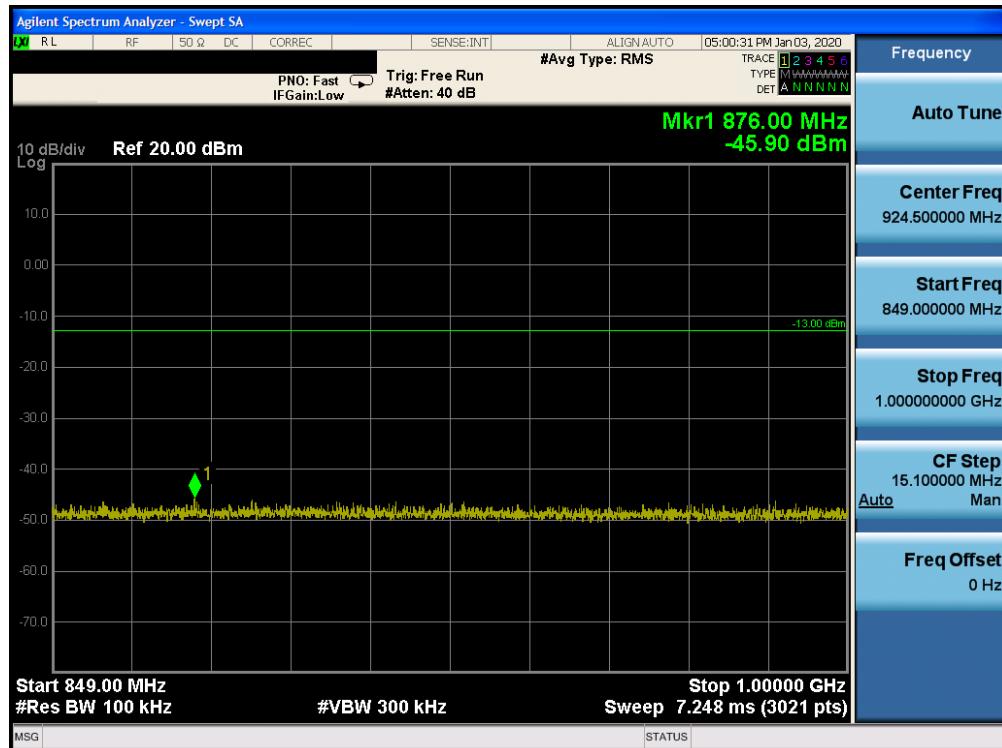


Plot 7-9. Conducted Spurious Plot (Cellular GPRS Mode - Low Channel)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 20 of 113

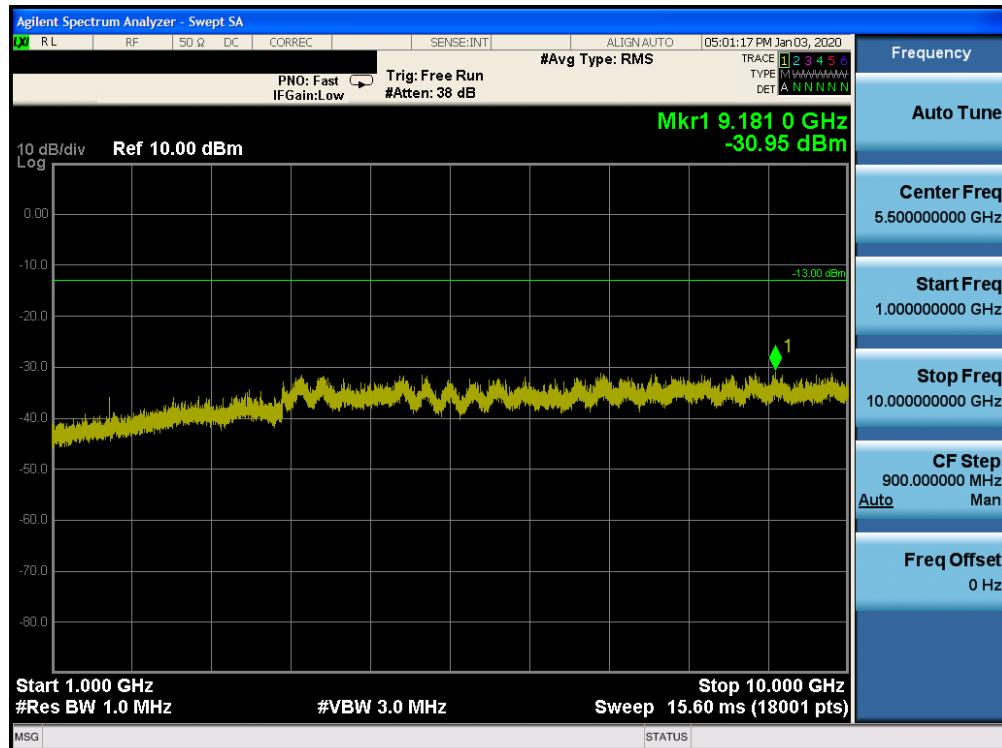


Plot 7-10. Conducted Spurious Plot (Cellular GPRS Mode - Low Channel)

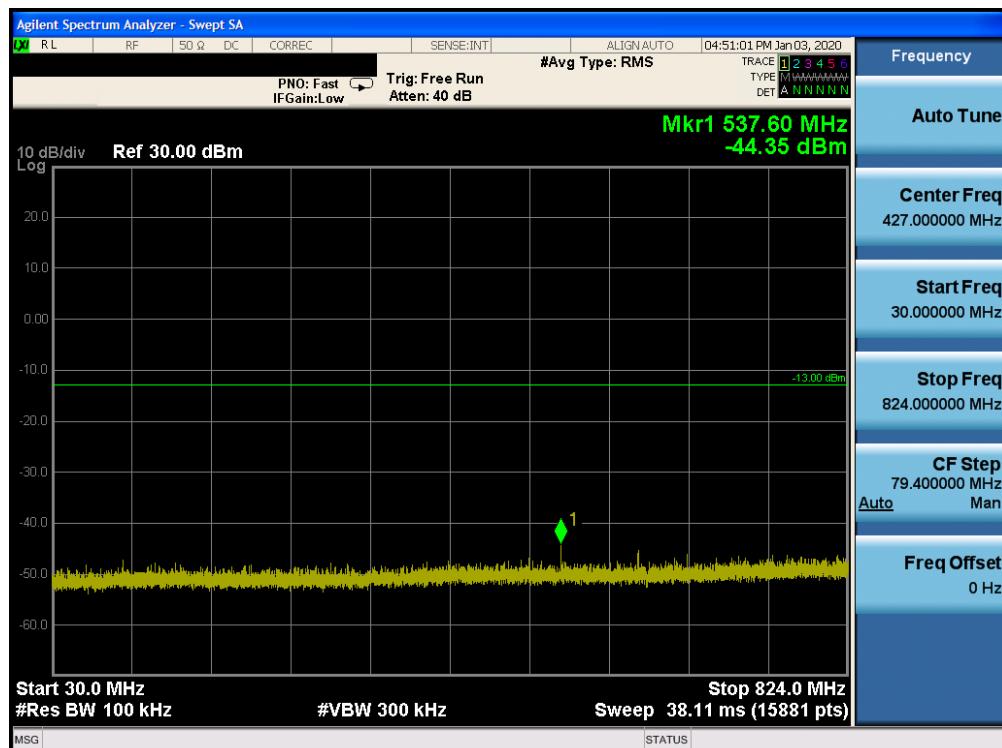


Plot 7-11. Conducted Spurious Plot (Cellular GPRS Mode - Mid Channel)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 21 of 113

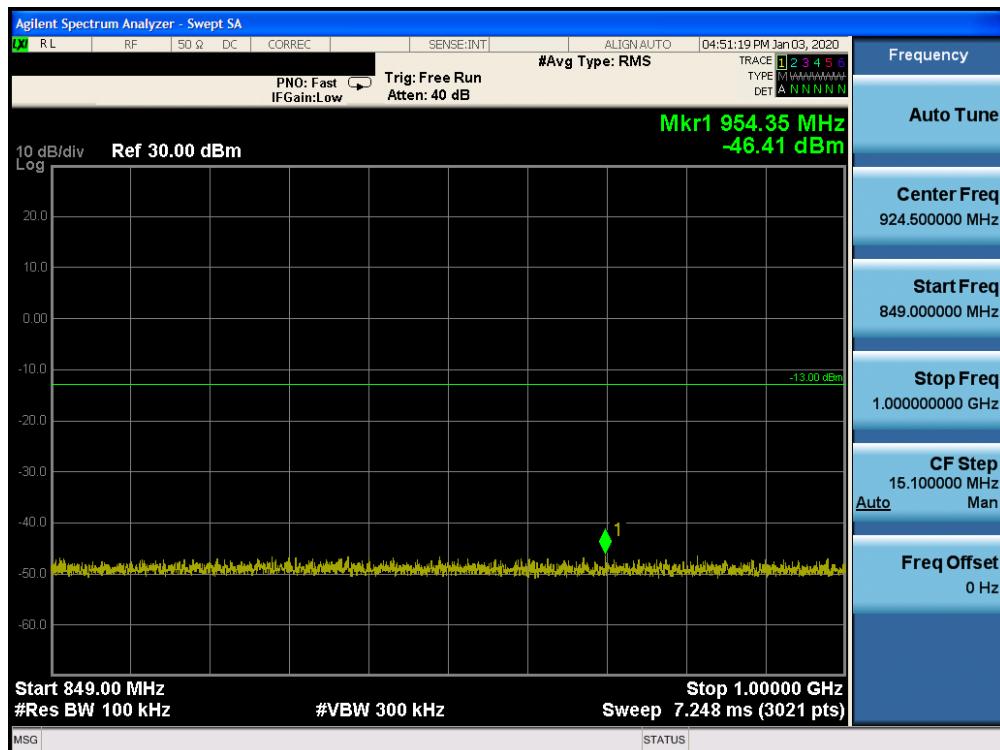


Plot 7-12. Conducted Spurious Plot (Cellular GPRS Mode - Mid Channel)

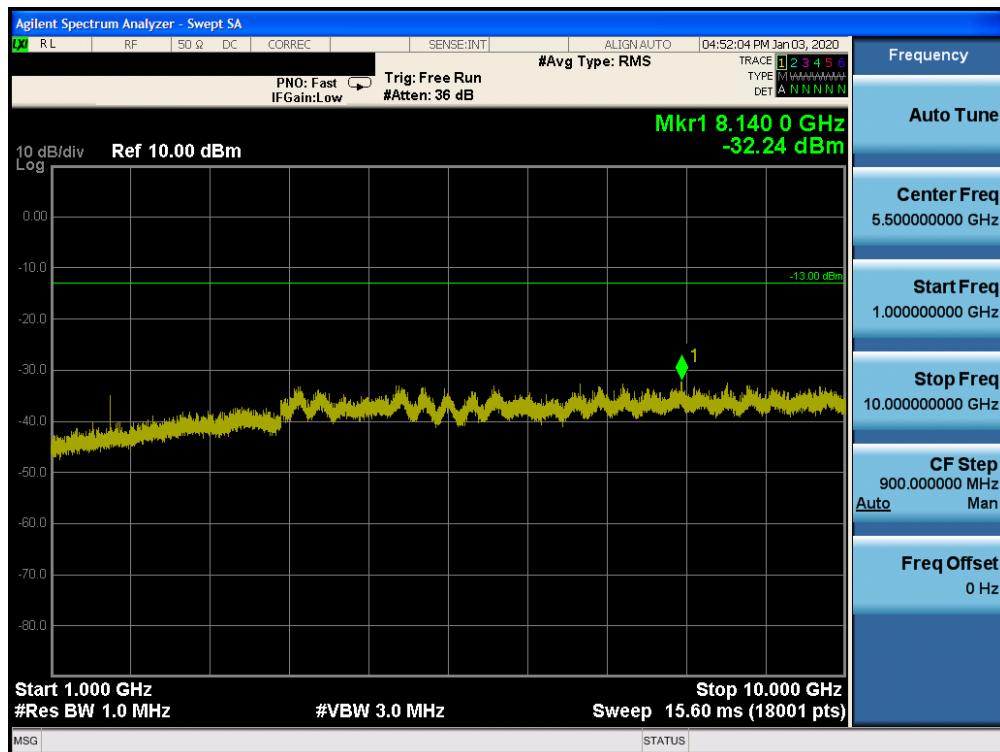


Plot 7-13. Conducted Spurious Plot (Cellular GPRS Mode - Mid Channel)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 22 of 113	

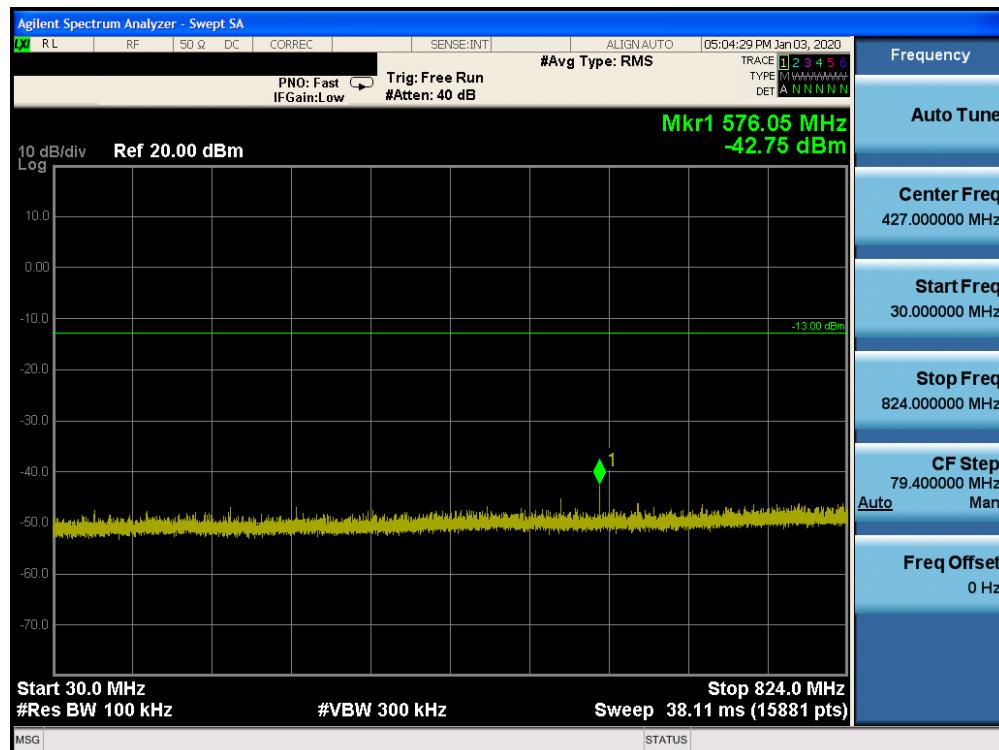


Plot 7-14. Conducted Spurious Plot (Cellular GPRS Mode - High Channel)

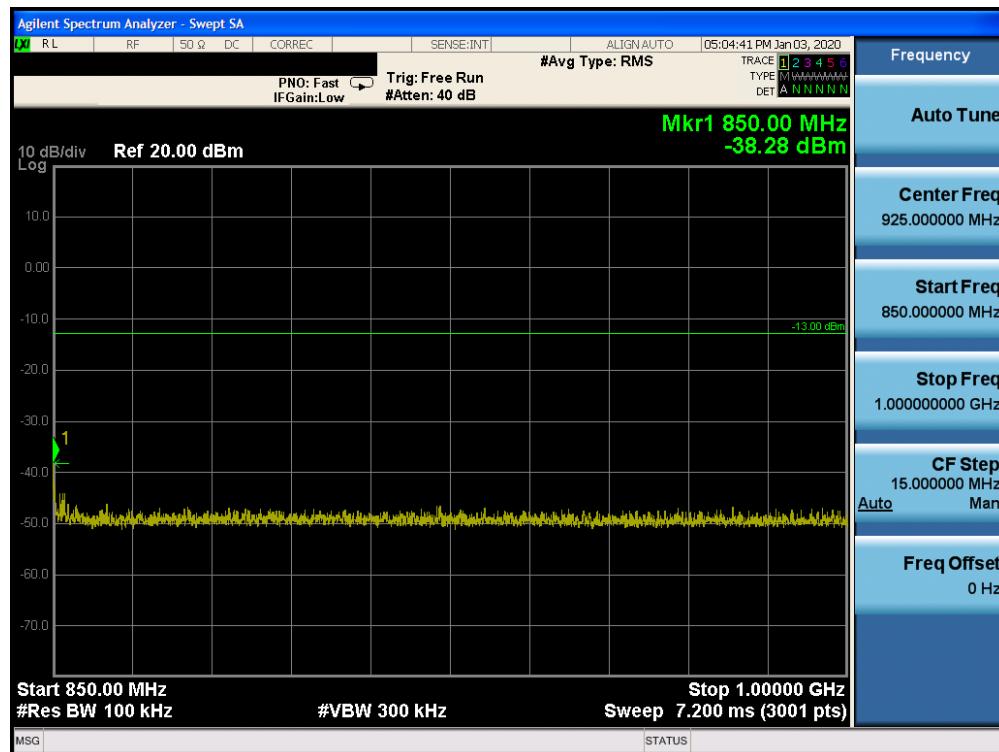

Plot 7-15. Conducted Spurious Plot (Cellular GPRS Mode - High Channel)


FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 23 of 113

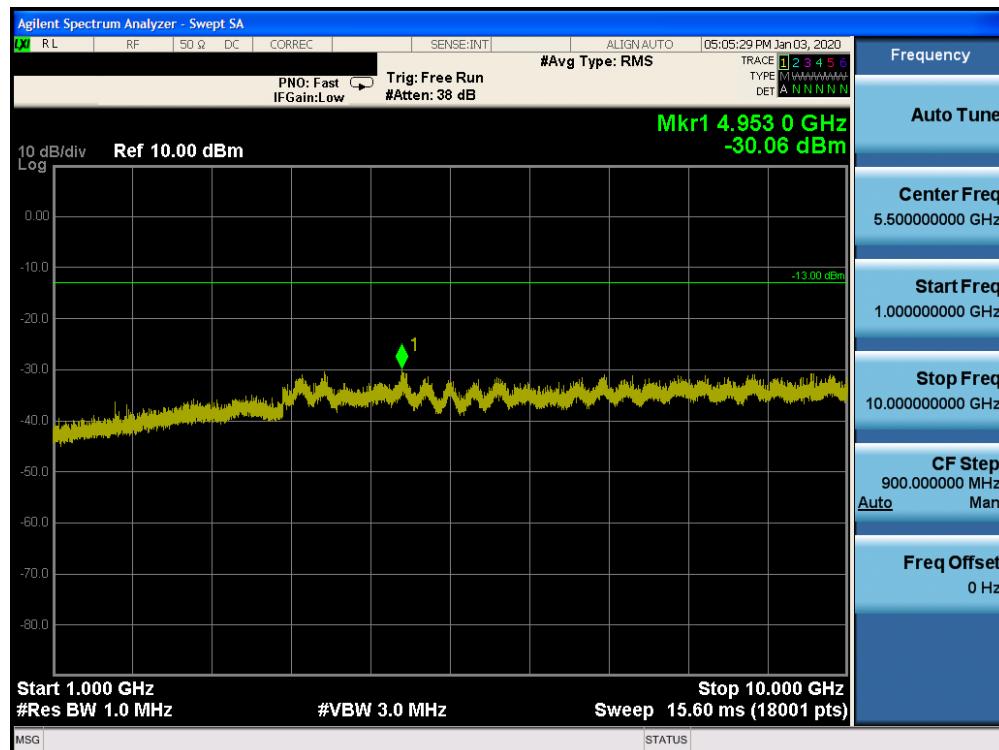


Plot 7-16. Conducted Spurious Plot (Cellular GPRS Mode - High Channel)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 24 of 113

PCS GPRS Mode

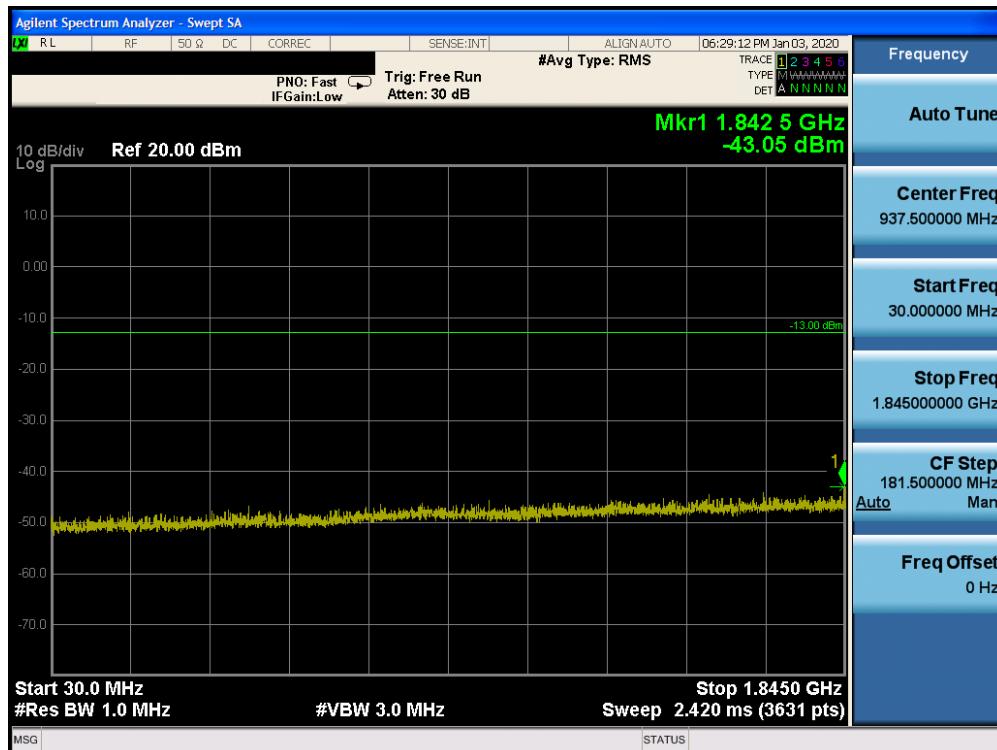


Plot 7-17. Conducted Spurious Plot (PCS GPRS Mode - Low Channel)

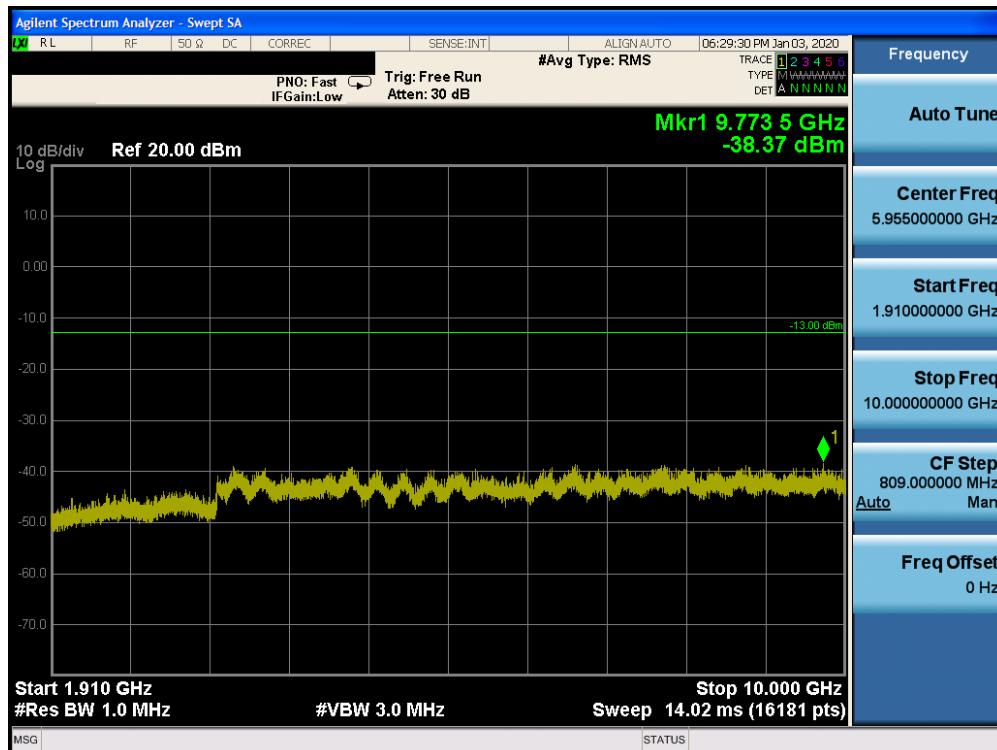


Plot 7-18. Conducted Spurious Plot (PCS GPRS Mode - Low Channel)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 25 of 113	

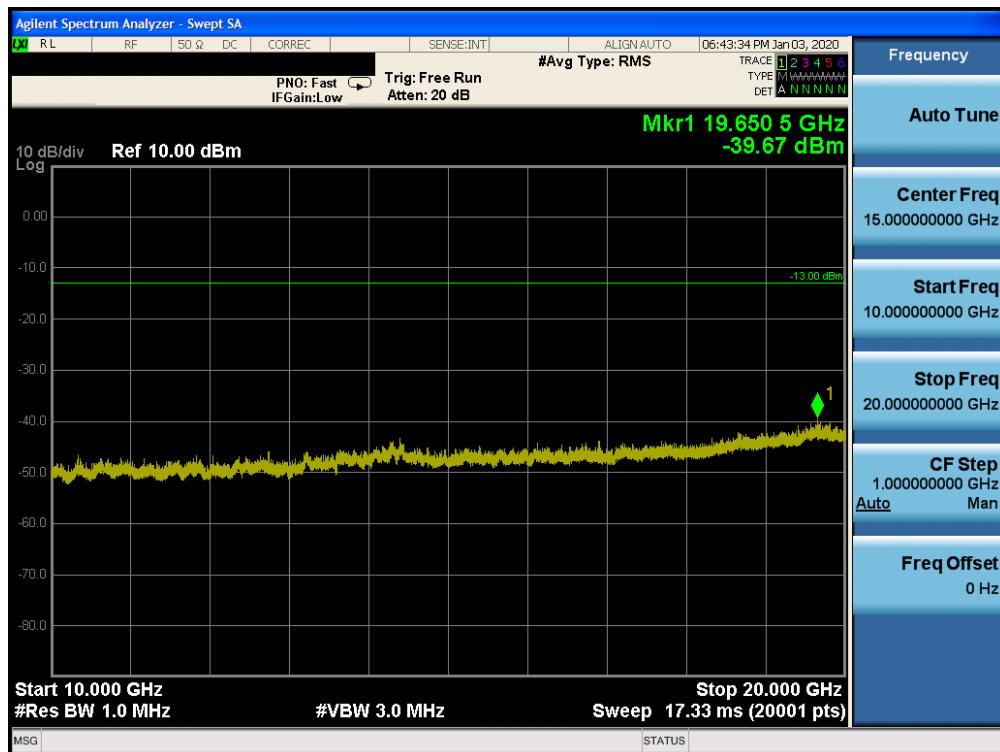


Plot 7-19. Conducted Spurious Plot (PCS GPRS Mode - Low Channel)

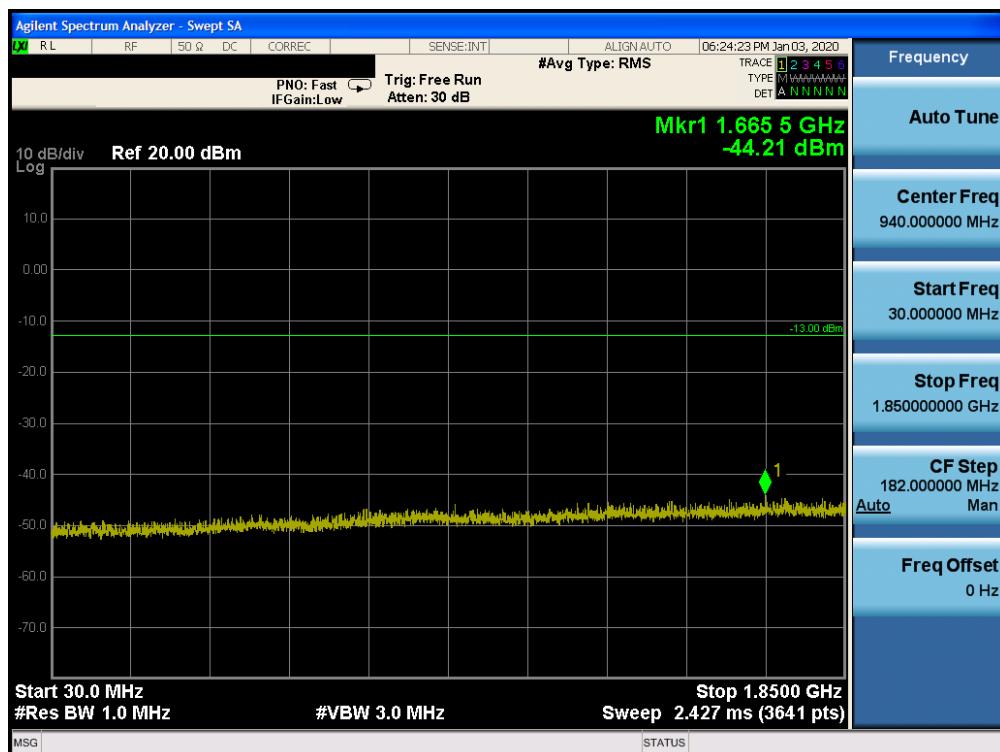


Plot 7-20. Conducted Spurious Plot (PCS GPRS Mode - Mid Channel)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 26 of 113

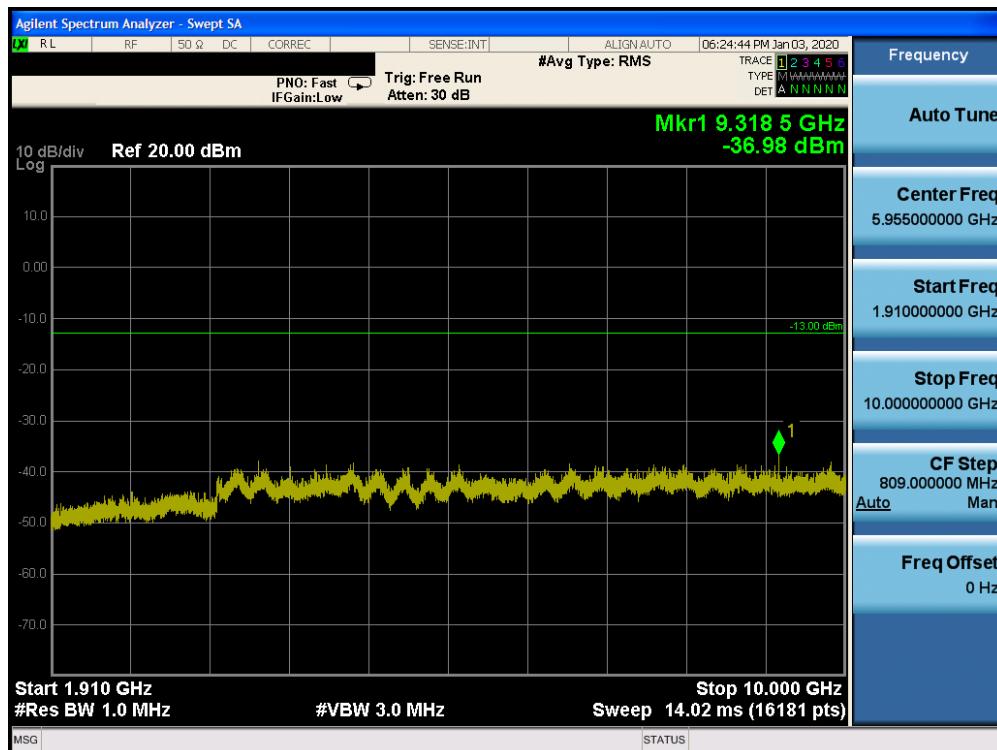


Plot 7-21. Conducted Spurious Plot (PCS GPRS Mode - Mid Channel)

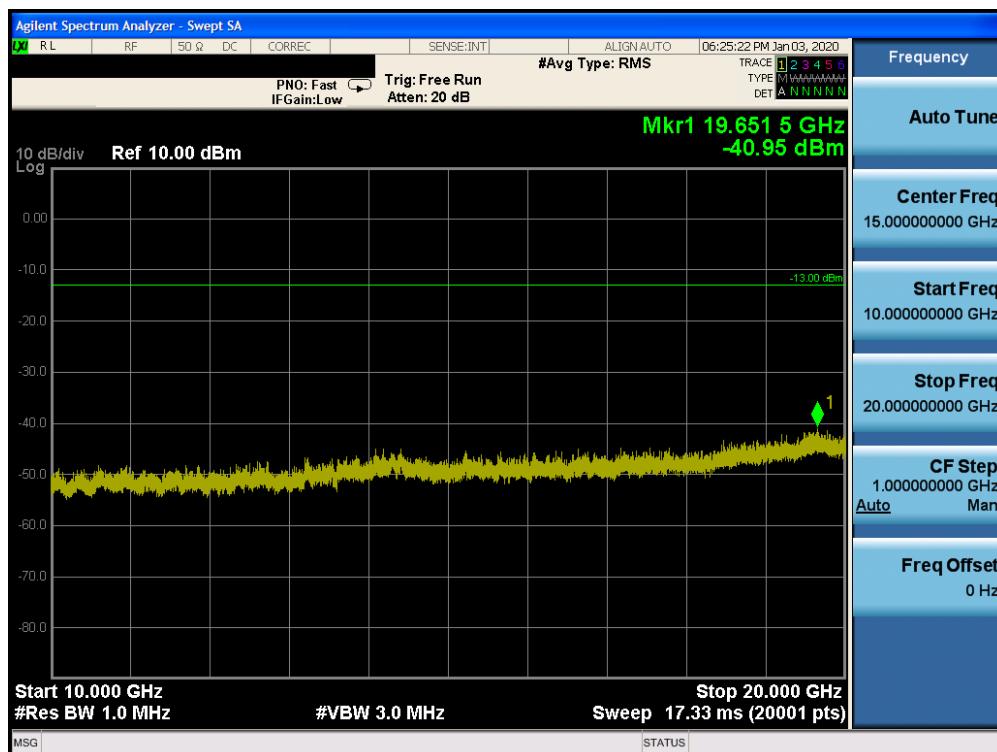


Plot 7-22. Conducted Spurious Plot (PCS GPRS Mode - Mid Channel)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 27 of 113

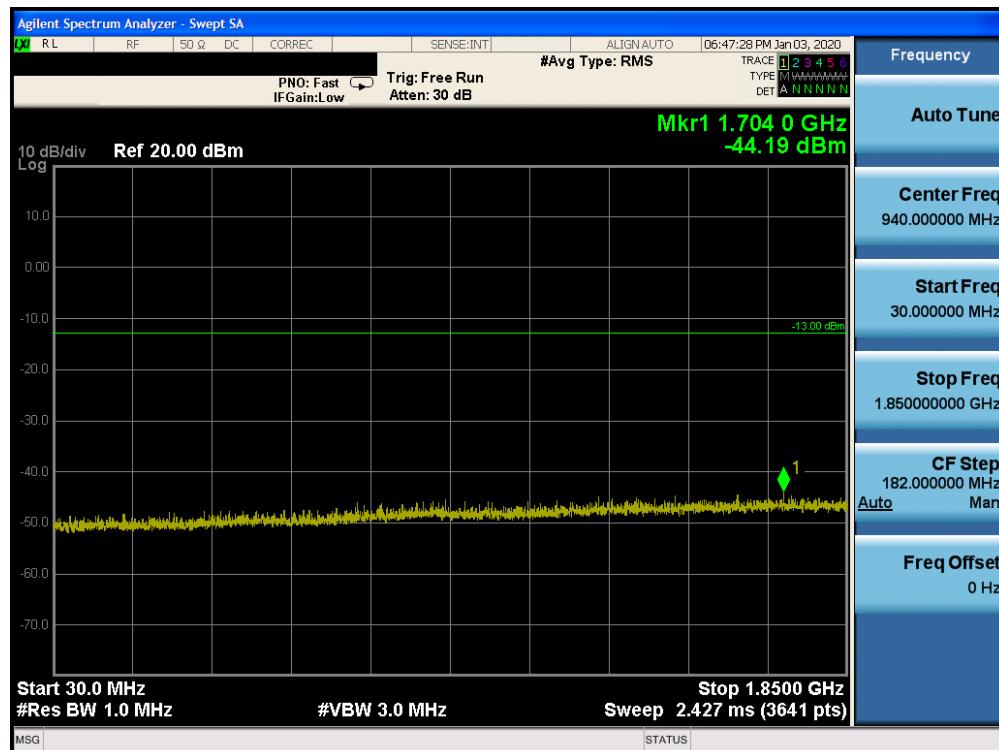


Plot 7-23. Conducted Spurious Plot (PCS GPRS Mode - High Channel)

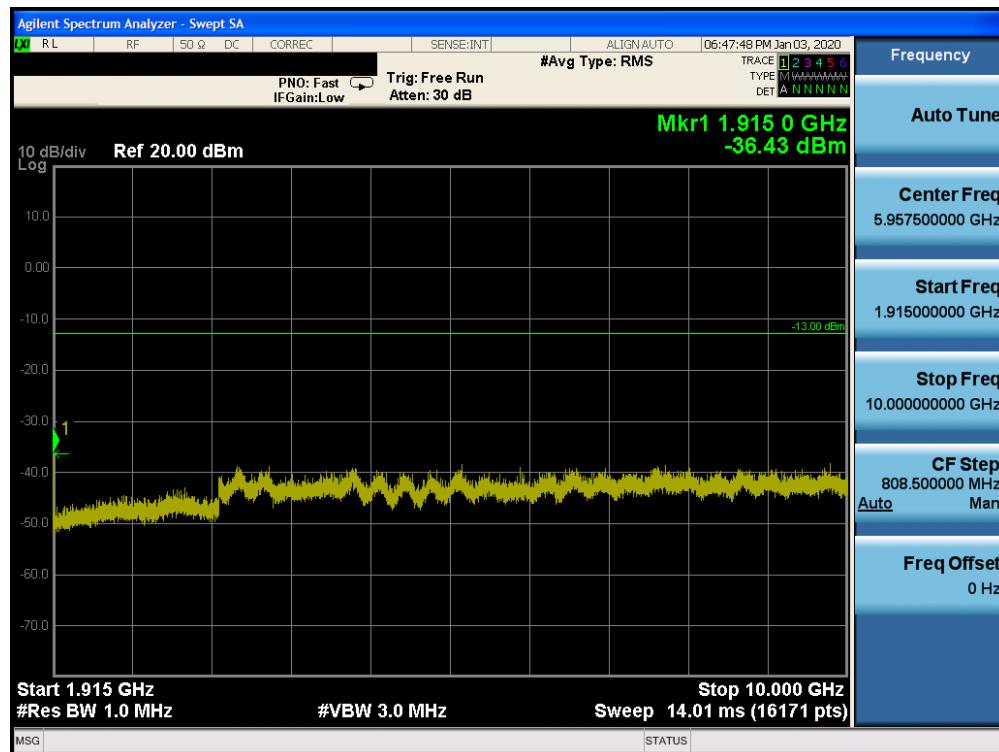

Plot 7-24. Conducted Spurious Plot (PCS GPRS Mode - High Channel)


FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 28 of 113

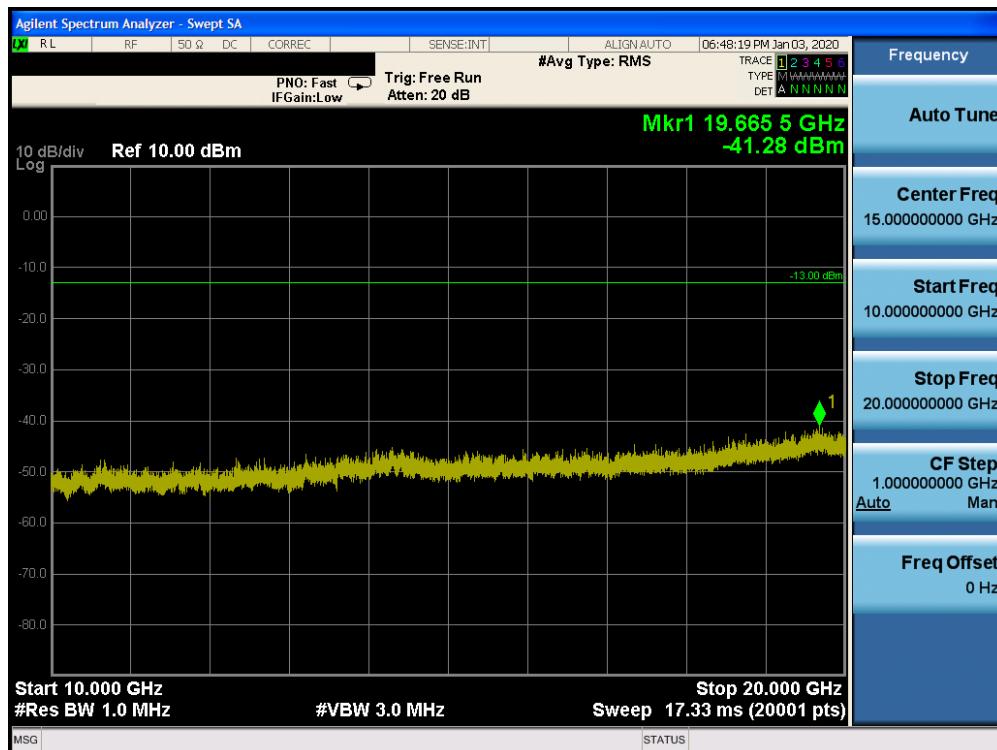


Plot 7-25. Conducted Spurious Plot (PCS GPRS Mode - High Channel)

FCC ID: BCGA2068	 PCTEST	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device		Page 29 of 113

Cellular WCDMA Mode

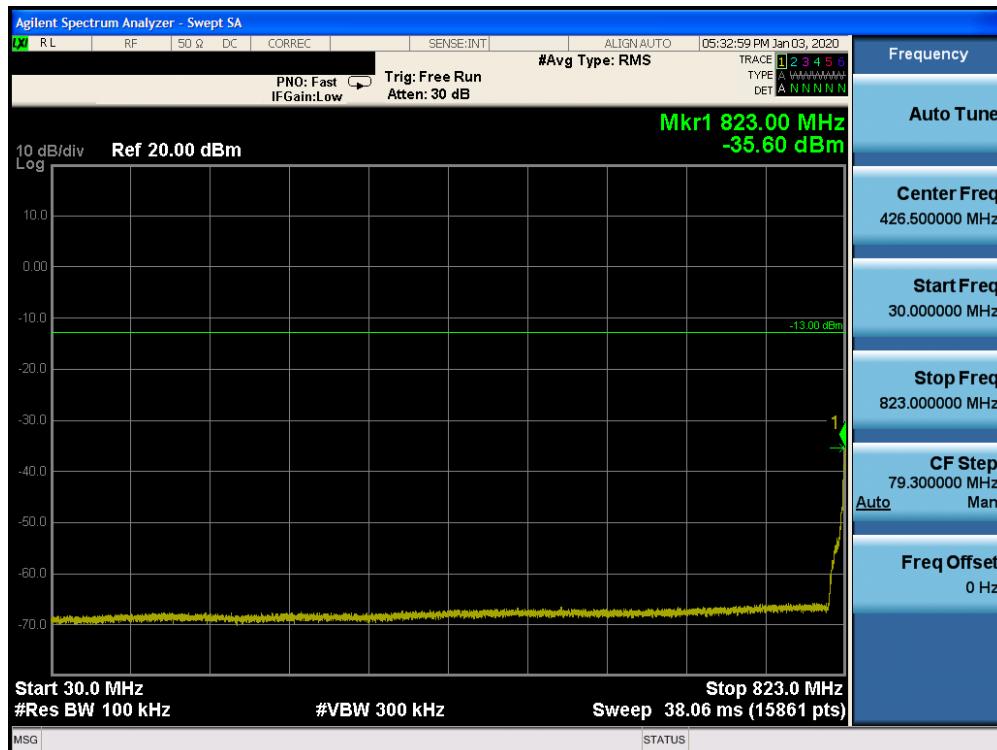

Plot 7-26. Conducted Spurious Plot (Cellular WCDMA Mode - Low Channel)

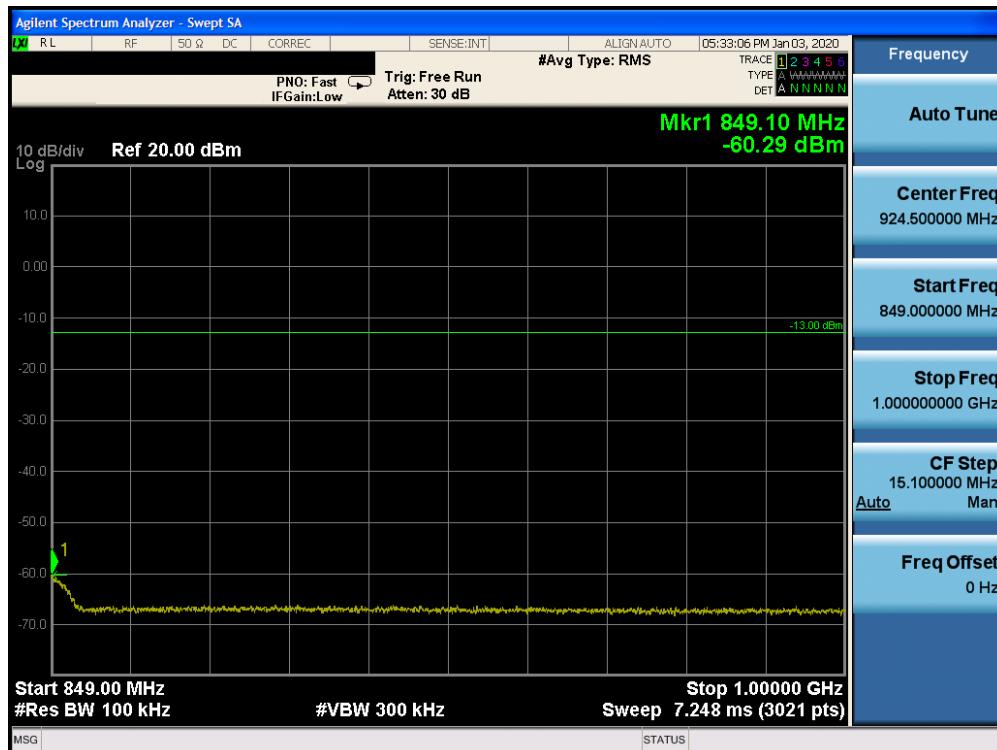


Plot 7-27. Conducted Spurious Plot (Cellular WCDMA Mode - Low Channel)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 30 of 113	




Plot 7-28. Conducted Spurious Plot (Cellular WCDMA Mode - Low Channel)

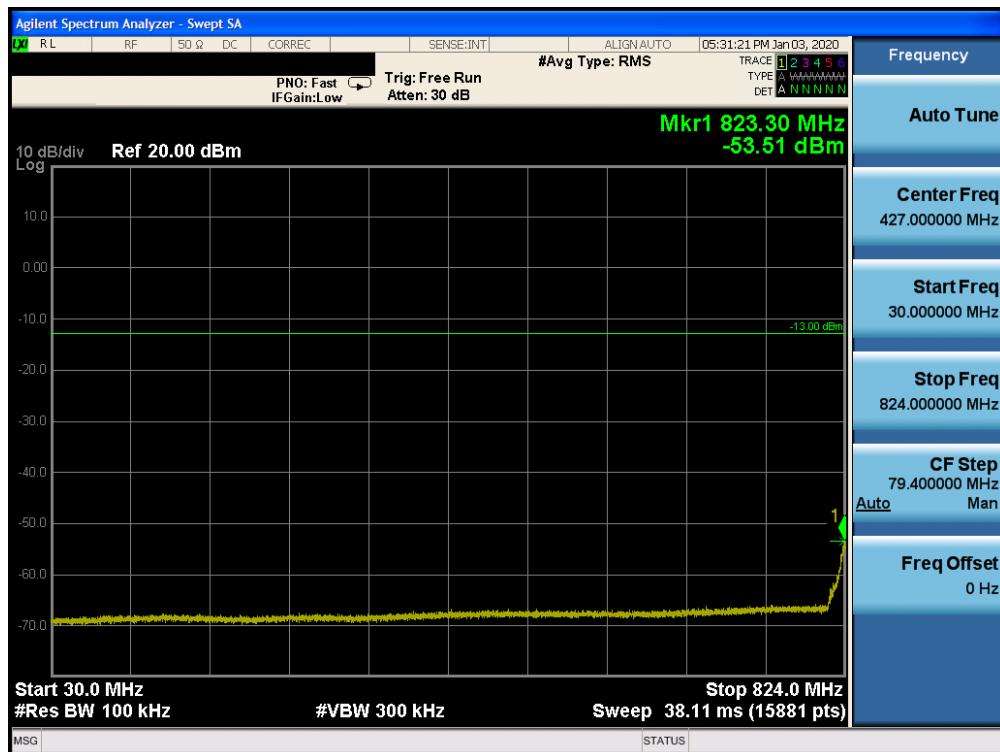


Plot 7-29. Conducted Spurious Plot (Cellular WCDMA Mode - Mid Channel)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 31 of 113

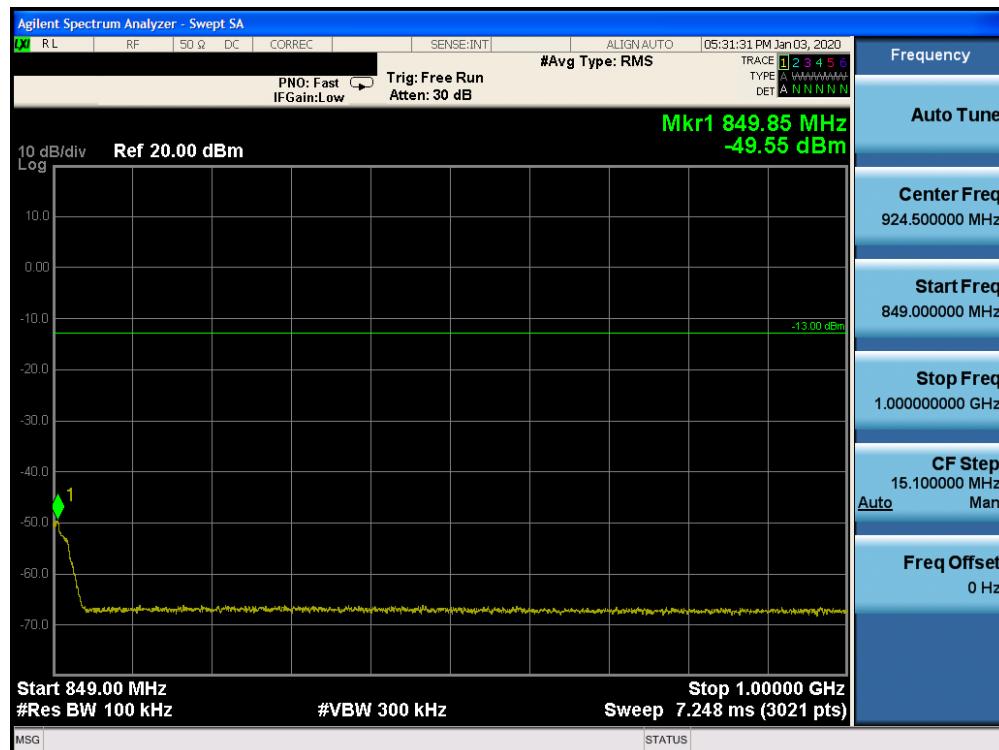


Plot 7-30. Conducted Spurious Plot (Cellular WCDMA Mode - Mid Channel)

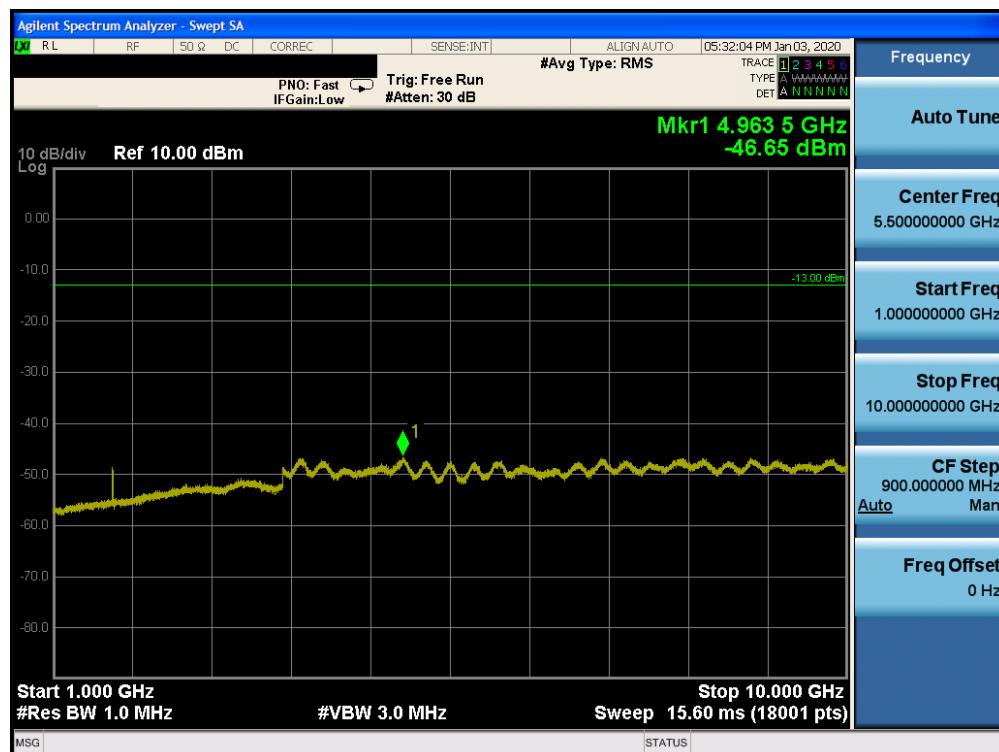


Plot 7-31. Conducted Spurious Plot (Cellular WCDMA Mode - Mid Channel)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 32 of 113

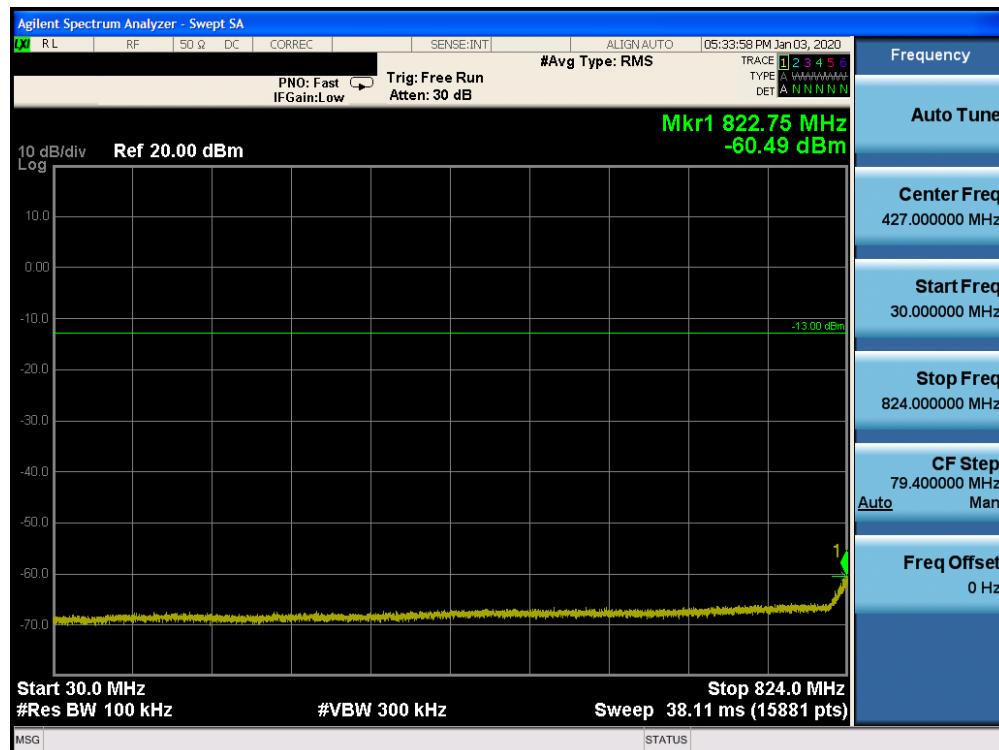


Plot 7-32. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)

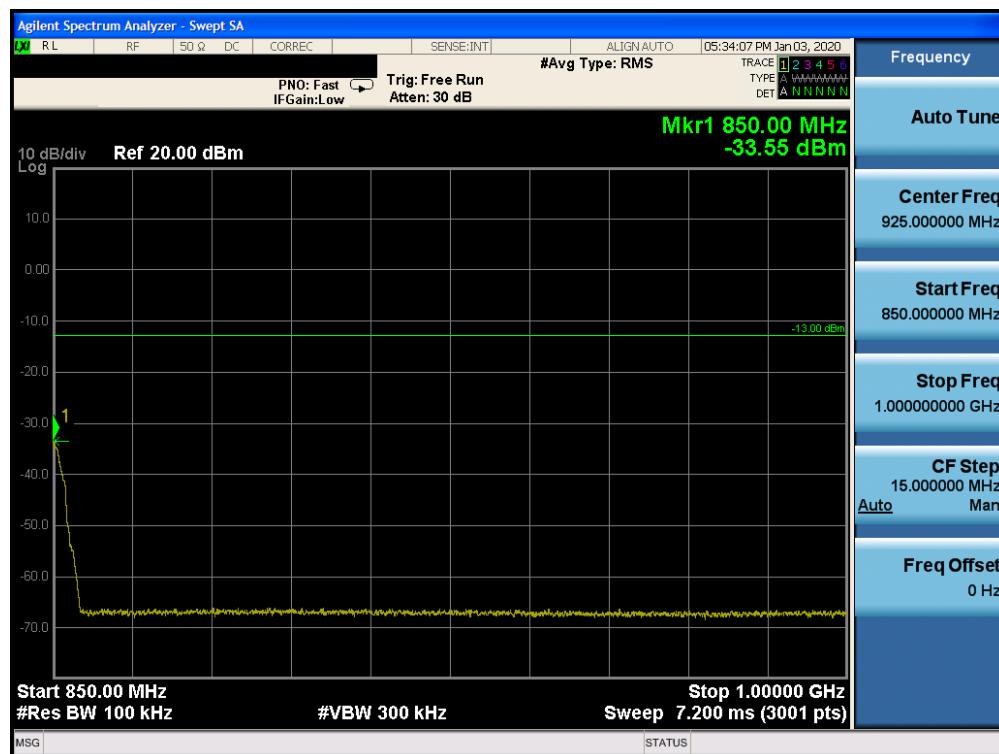

Plot 7-33. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)


FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 33 of 113

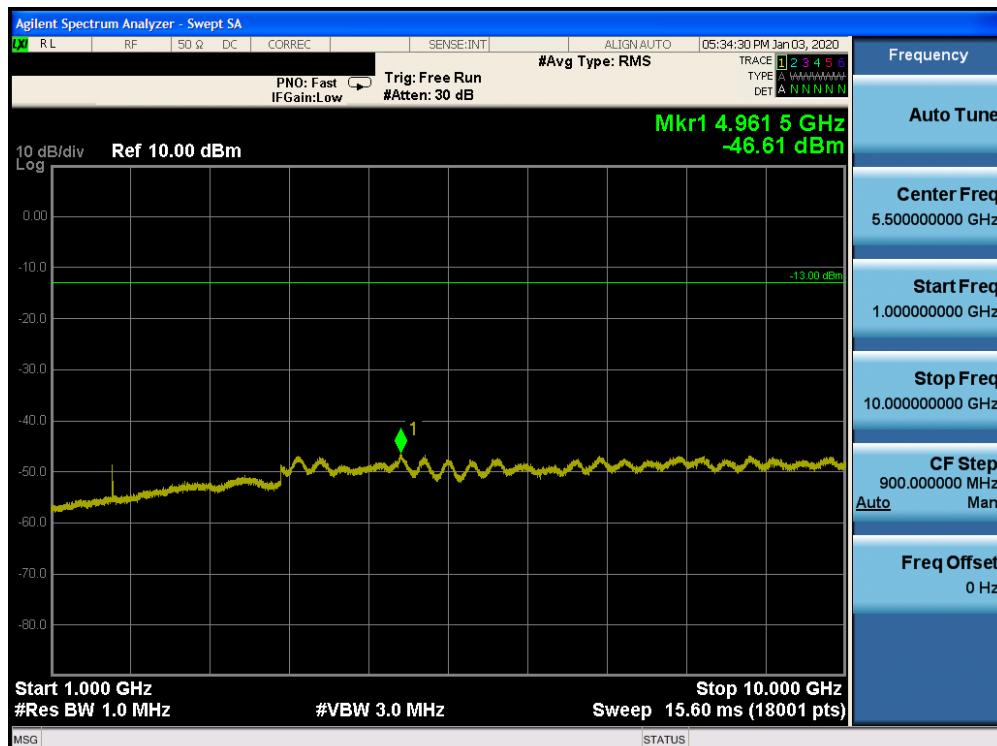


Plot 7-34. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 34 of 113

AWS WCDMA Mode

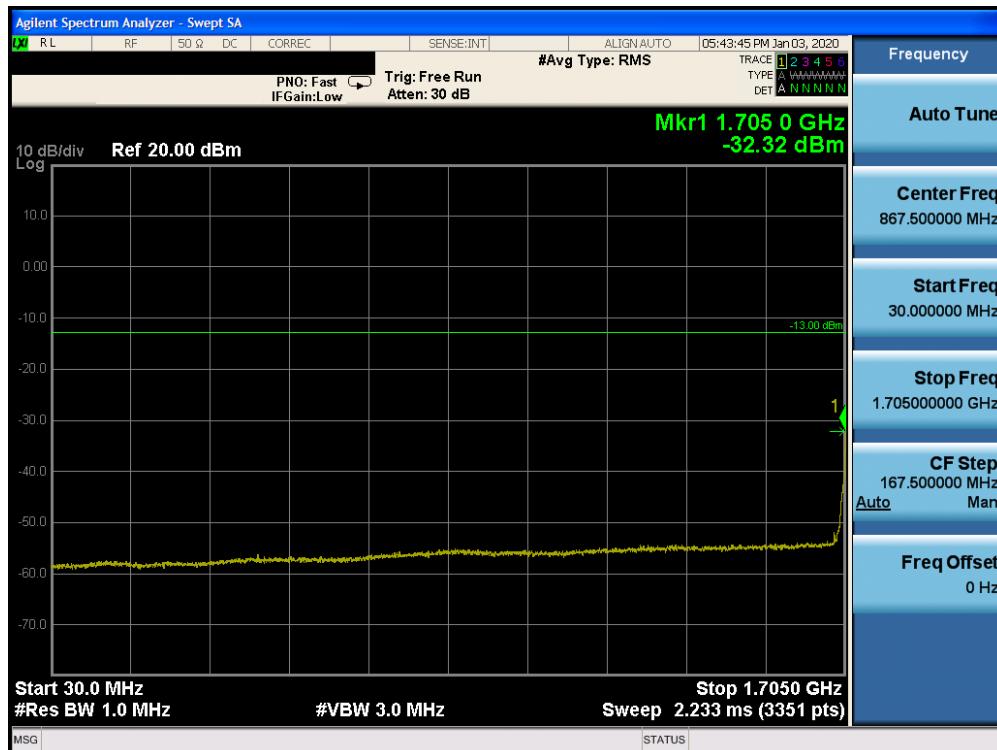


Plot 7-35. Conducted Spurious Plot (AWS WCDMA Mode - Low Channel)

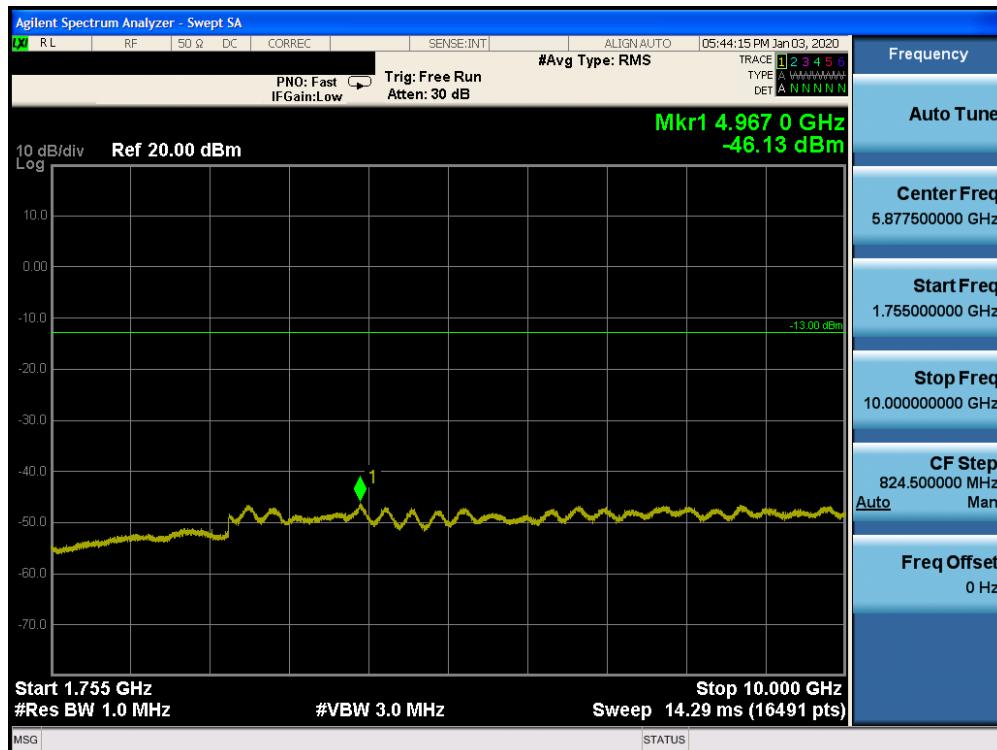

Plot 7-36. Conducted Spurious Plot (AWS WCDMA Mode - Low Channel)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 35 of 113	

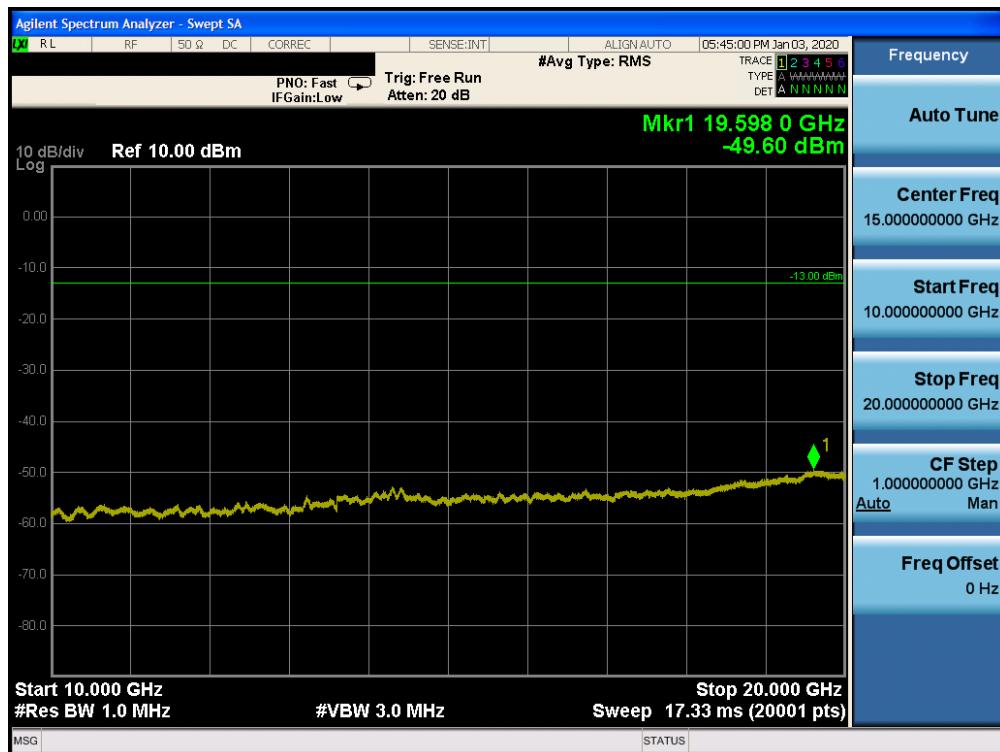


Plot 7-37. Conducted Spurious Plot (AWS WCDMA Mode - Low Channel)




Plot 7-38. Conducted Spurious Plot (AWS WCDMA Mode - Mid Channel)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 36 of 113

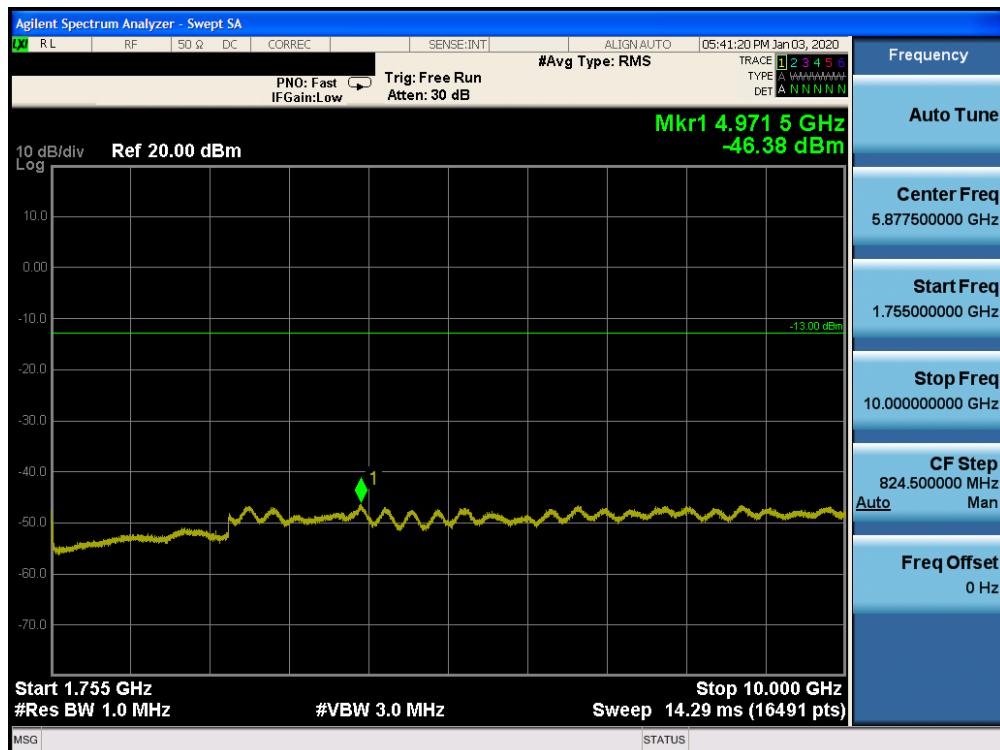

Plot 7-39. Conducted Spurious Plot (AWS WCDMA Mode - Mid Channel)

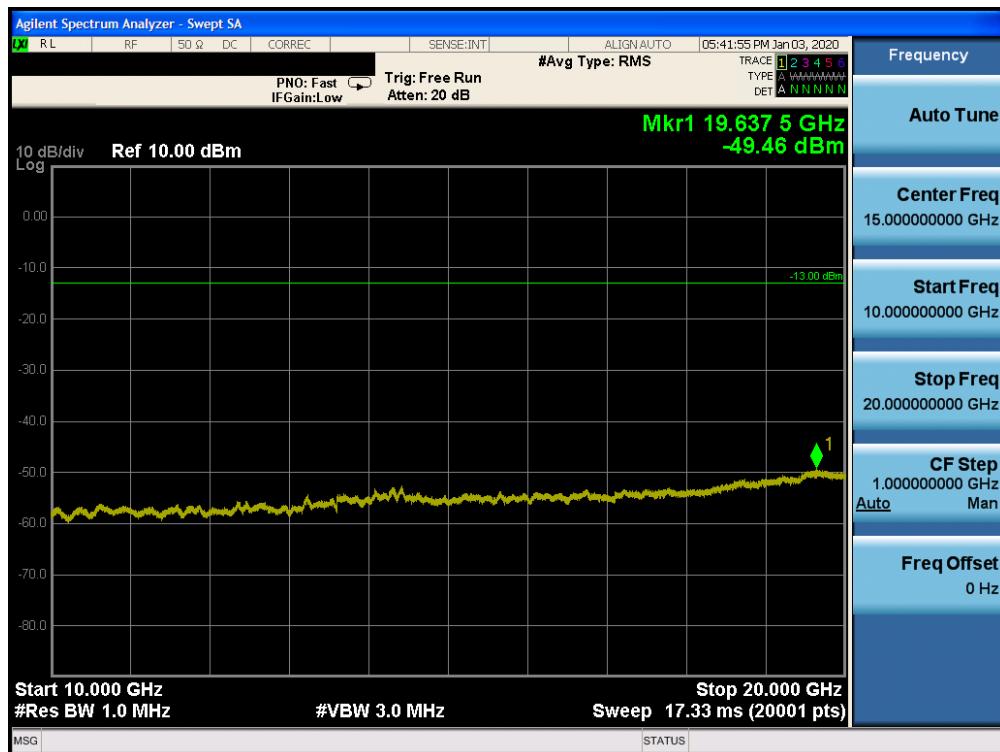


Plot 7-40. Conducted Spurious Plot (AWS WCDMA Mode - Mid Channel)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 37 of 113




Plot 7-41. Conducted Spurious Plot (AWS WCDMA Mode - High Channel)

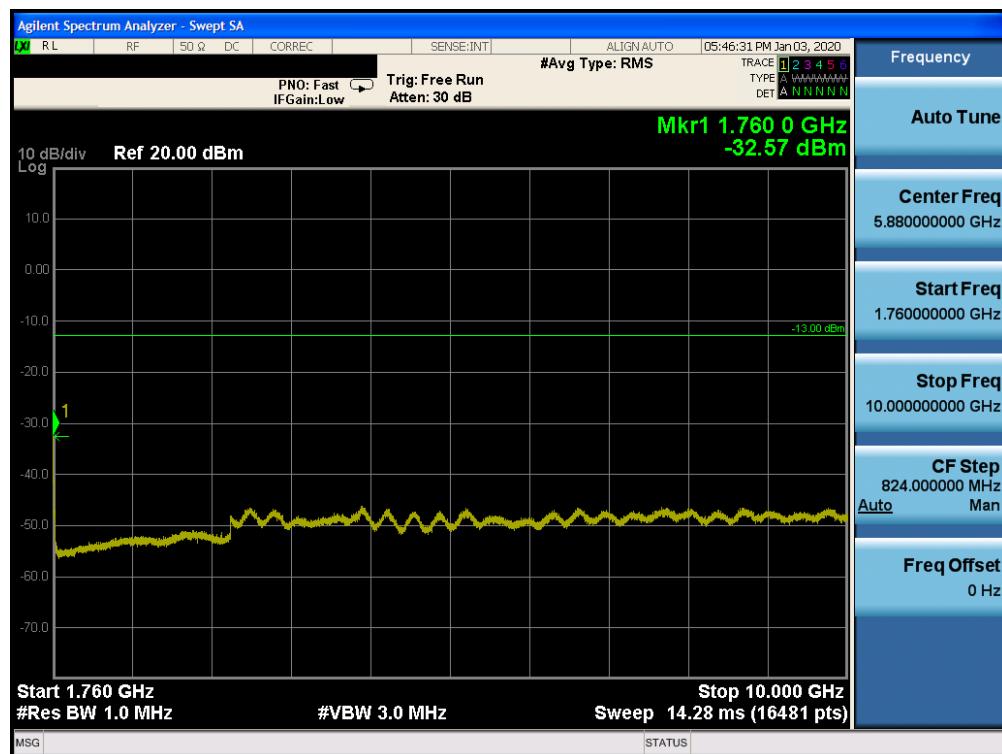

Plot 7-42. Conducted Spurious Plot (AWS WCDMA Mode - High Channel)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 38 of 113

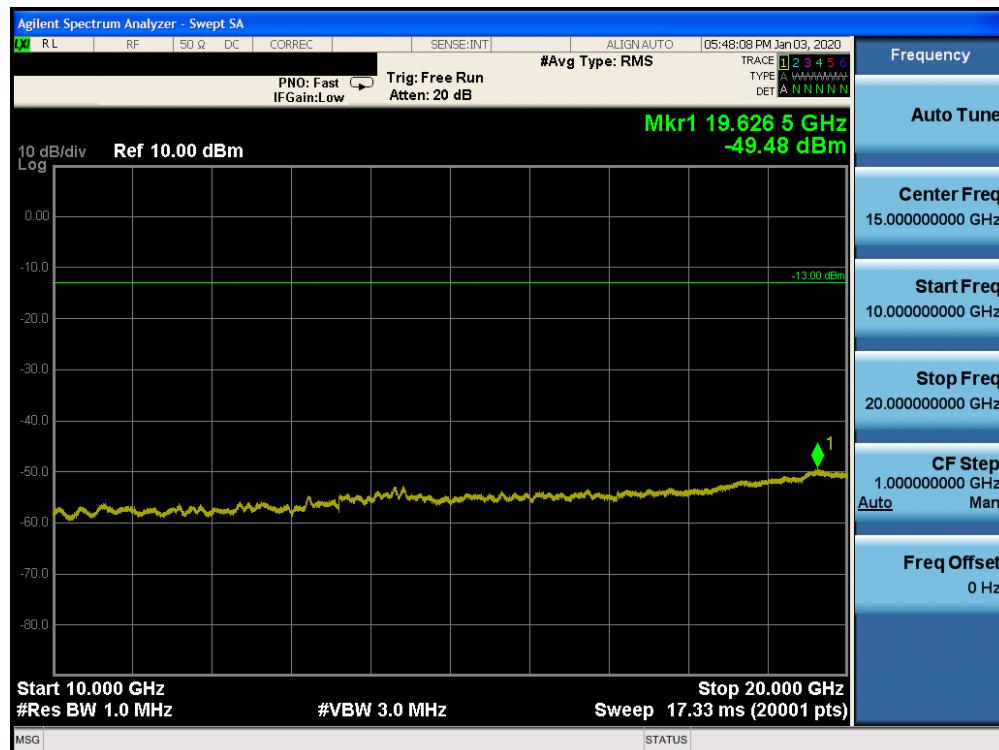


Plot 7-43. Conducted Spurious Plot (AWS WCDMA Mode - High Channel)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 39 of 113

PCS WCDMA Mode




Plot 7-44. Conducted Spurious Plot (PCS WCDMA Mode - Low Channel)

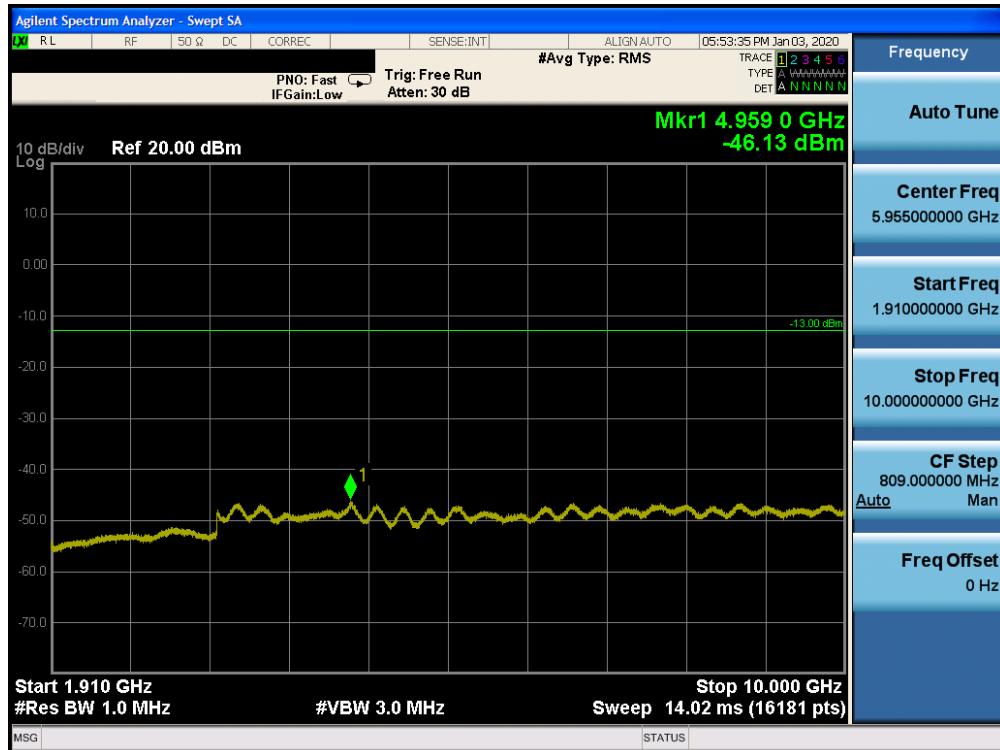


Plot 7-45. Conducted Spurious Plot (PCS WCDMA Mode - Low Channel)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 40 of 113	

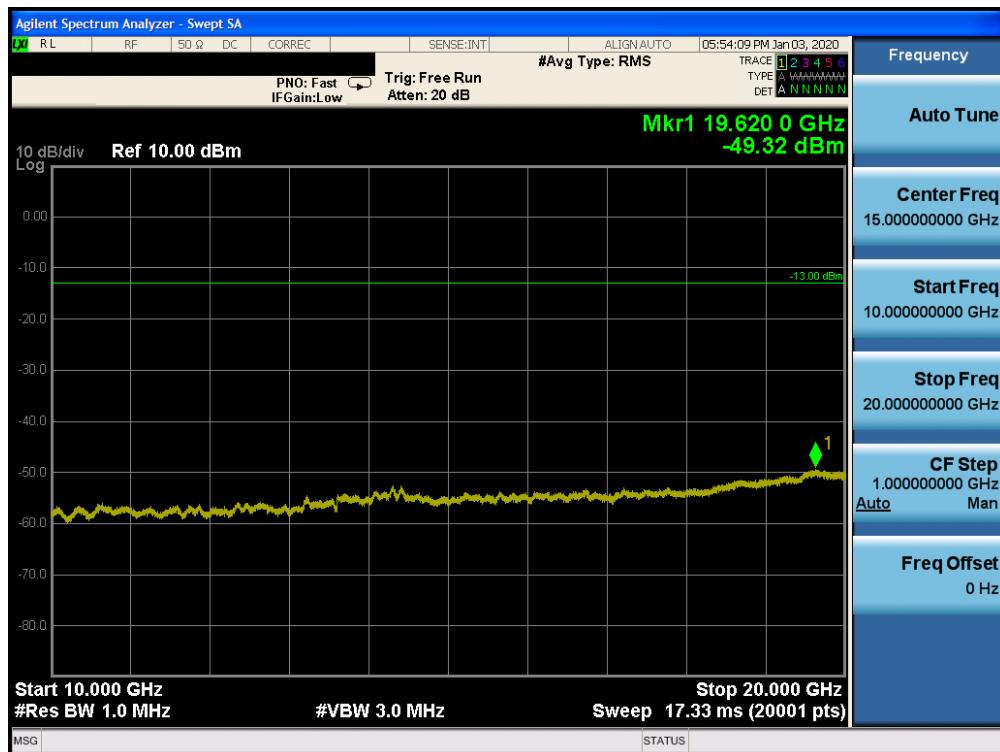


Plot 7-46. Conducted Spurious Plot (PCS WCDMA Mode - Low Channel)

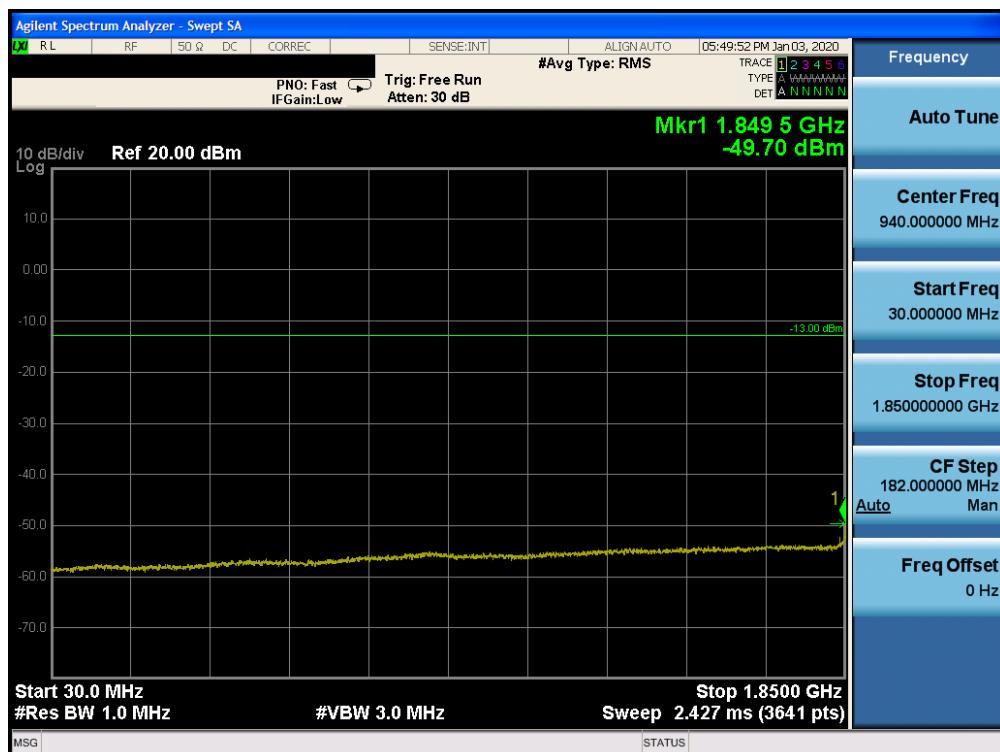


Plot 7-47. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 41 of 113

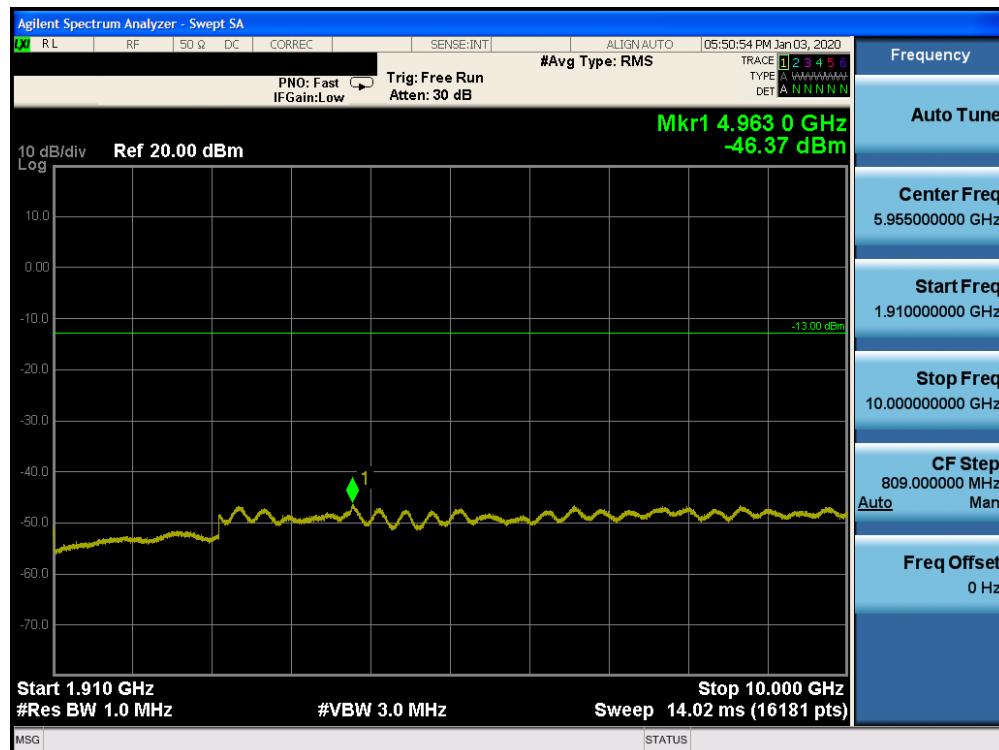


Plot 7-48. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)

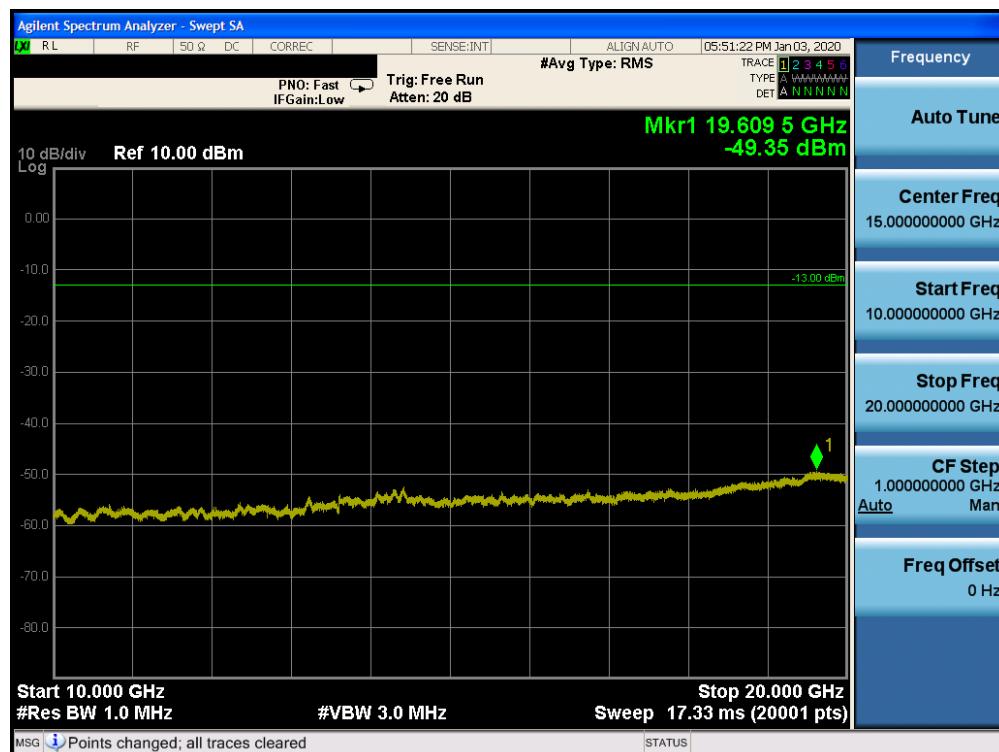


Plot 7-49. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 42 of 113

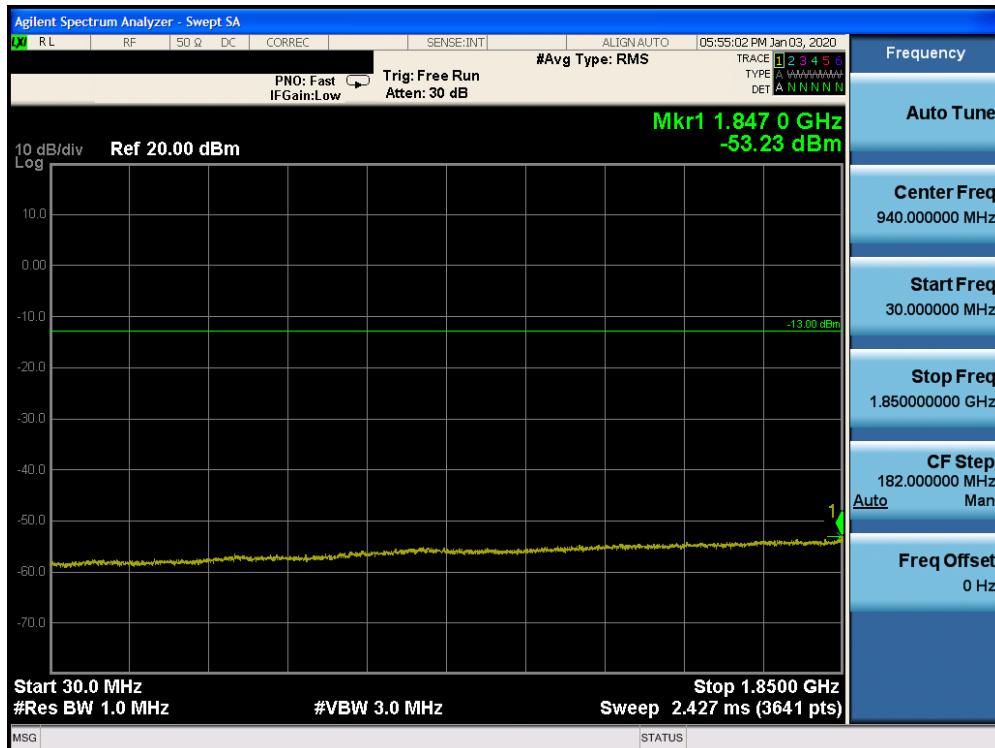


Plot 7-50. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

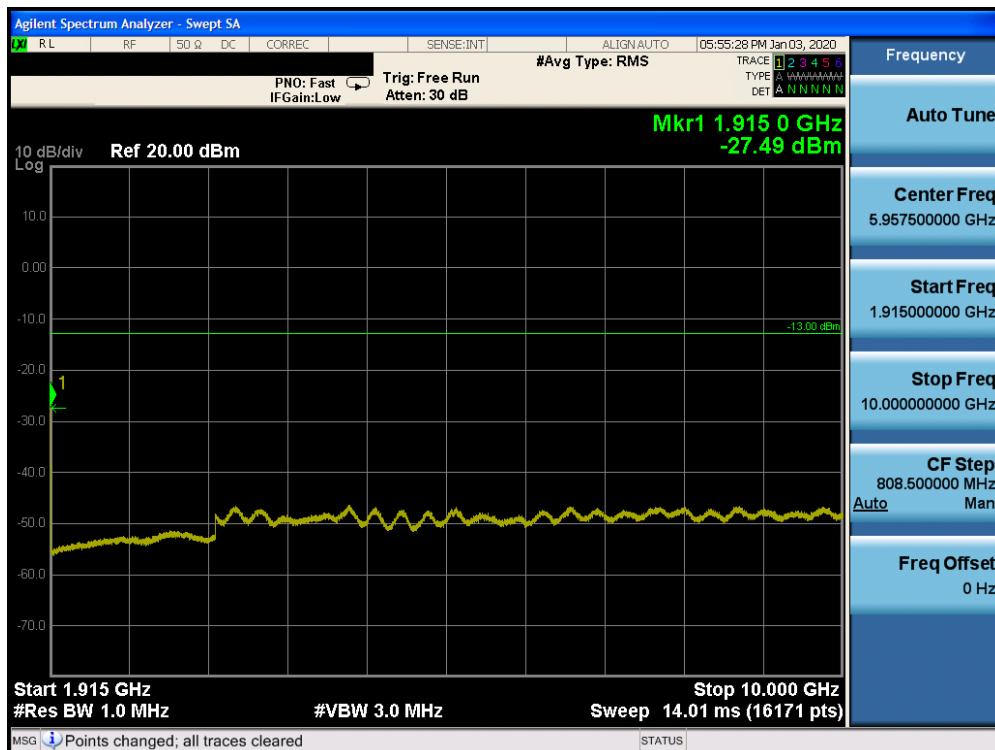

Plot 7-51. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 43 of 113	

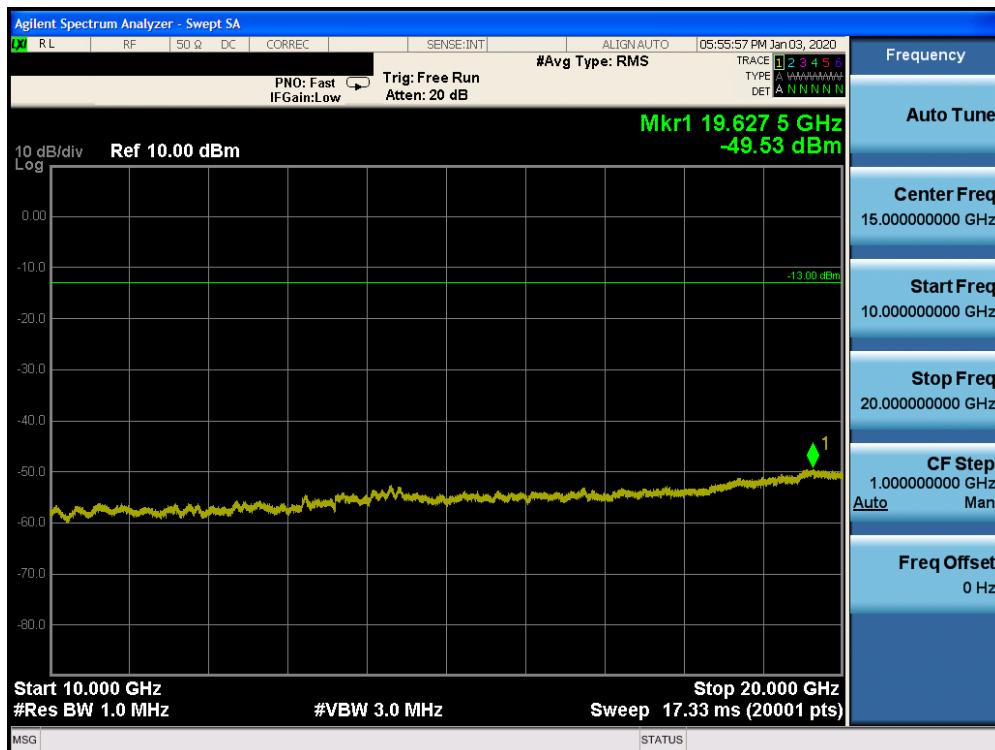

Plot 7-52. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 44 of 113

7.4 Band Edge Emissions at Antenna Terminal

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{\text{Watts}})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW \geq 1% of the emission bandwidth
4. VBW \geq 3 x RBW
5. Detector = RMS
6. Number of sweep points \geq 2 x Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

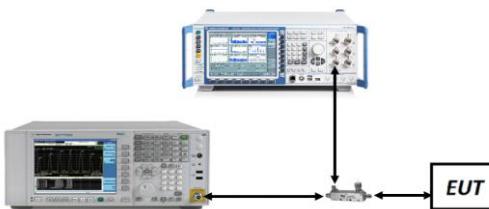



Figure 7-3. Test Instrument & Measurement Setup

Test Notes


1. Per 22.917(b), 24.238(b), 27.53(h)(3), and RSS-132(5.5), RSS-133(6.5), RSS-139(6.5), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
2. All ports were tested and only the worst case data were reported.
3. Refer to Table 2-1 Section 2.3 of this test report for correlation between Antennas and Ports.

FCC ID: BCGA2068	 PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 45 of 113

Cellular GPRS Mode

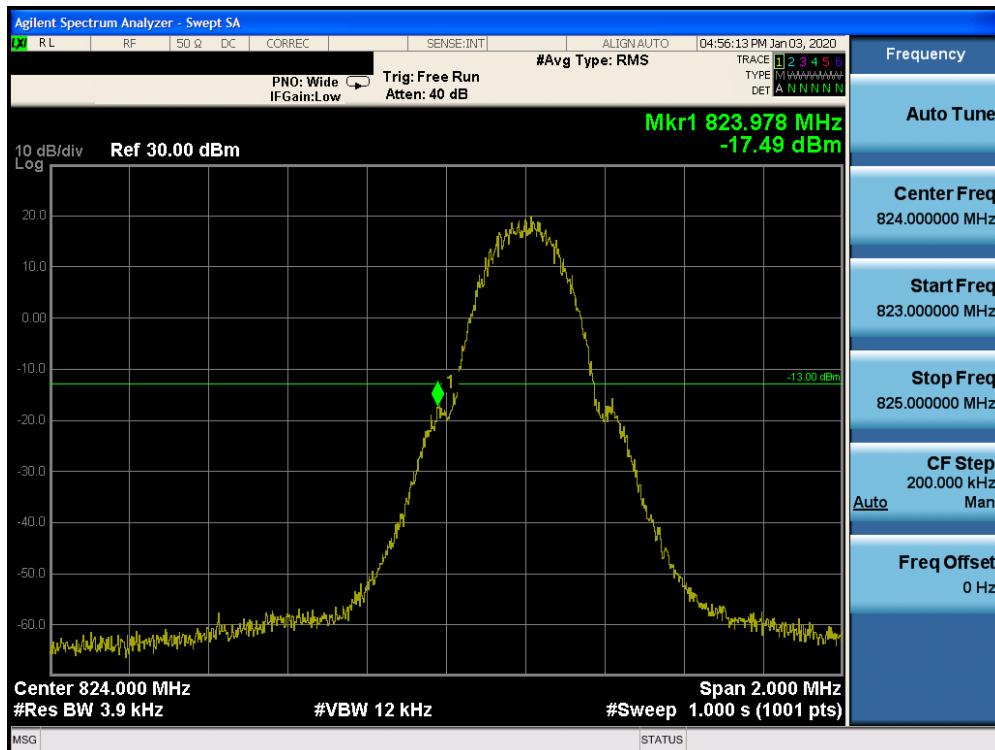


Plot 7-53. Band Edge Plot (Cellular GPRS Mode - Low Channel)

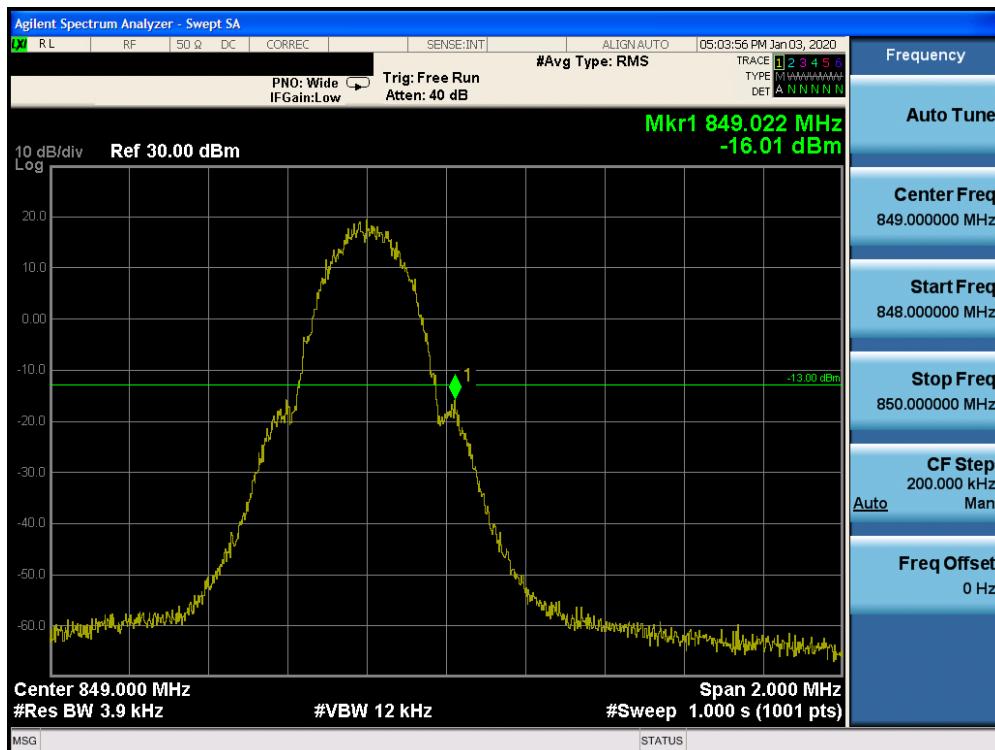


Plot 7-54. Band Edge Plot (Cellular GPRS Mode - High Channel)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 46 of 113

PCS GPRS Mode

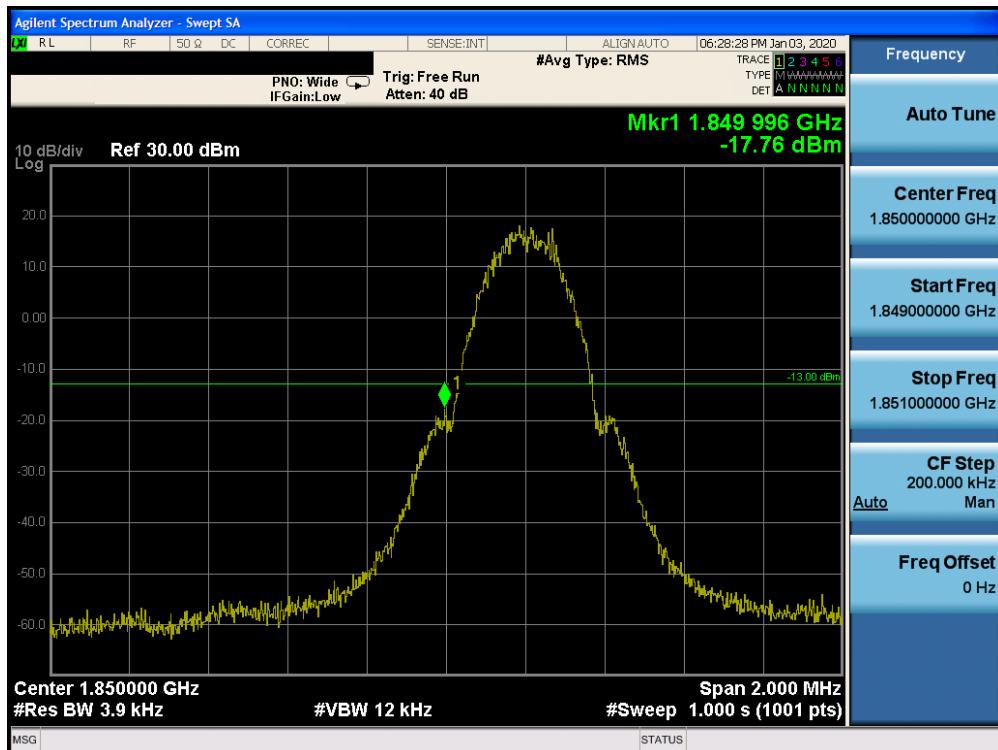


Plot 7-55. Band Edge Plot (PCS GPRS Mode - Low Channel)

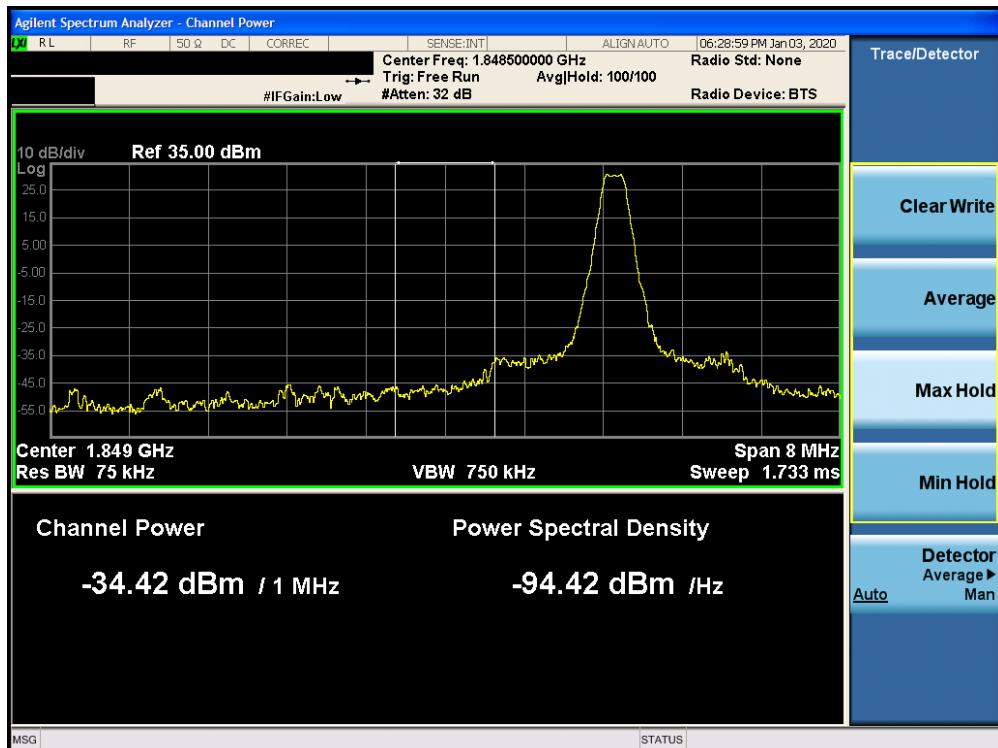


Plot 7-56. 4MHz Span Plot (PCS GPRS Mode - Low Channel)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device		Page 47 of 113

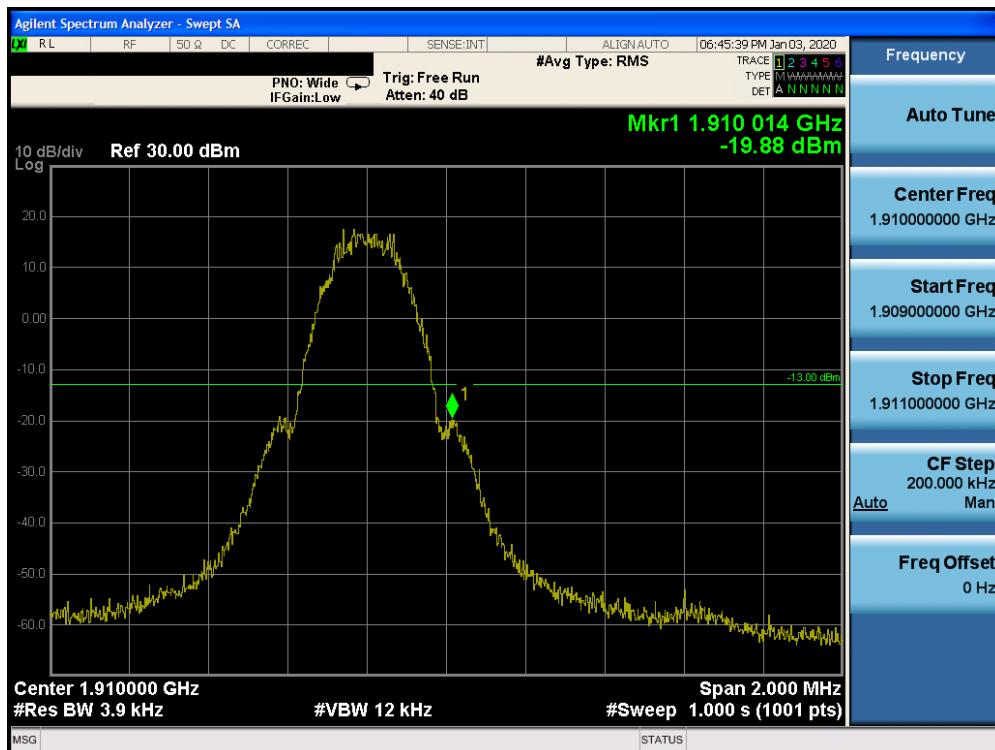

Plot 7-57. Band Edge Plot (PCS GPRS Mode - High Channel)

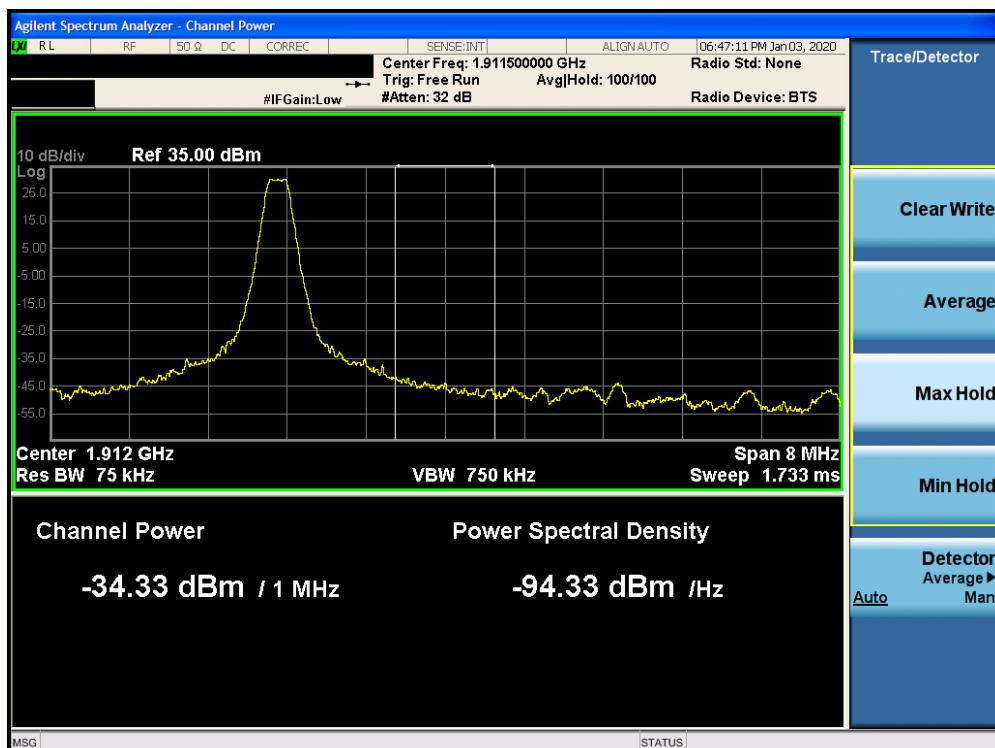

Plot 7-58. 4MHz Span Plot (PCS GPRS Mode - Low Channel)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 48 of 113

Cellular WCDMA Mode



Plot 7-59. Band Edge Plot (Cellular WCDMA Mode - Low Channel)




Plot 7-60. Band Edge Plot (Cellular WCDMA Mode - High Channel)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device		Page 49 of 113

AWS WCDMA Mode



Plot 7-61. Band Edge Plot (AWS WCDMA Mode - Low Channel)

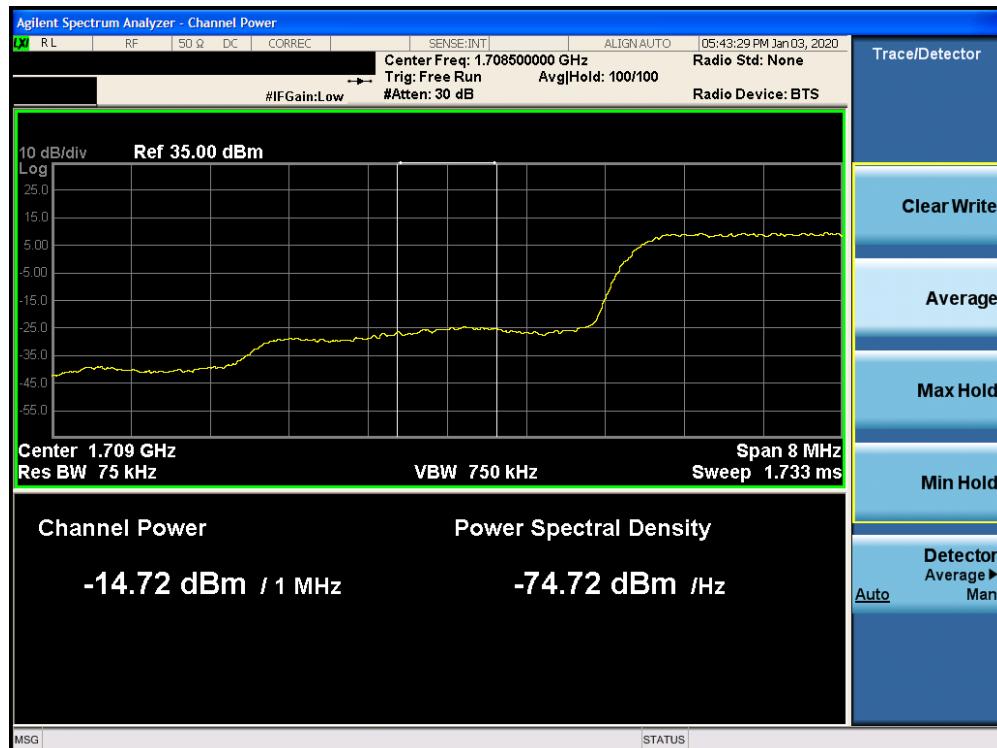


Plot 7-62. 4MHz Span Plot (AWS WCDMA Mode - Low Channel)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 50 of 113



Plot 7-63. Band Edge Plot (AWS WCDMA Mode - High Channel)

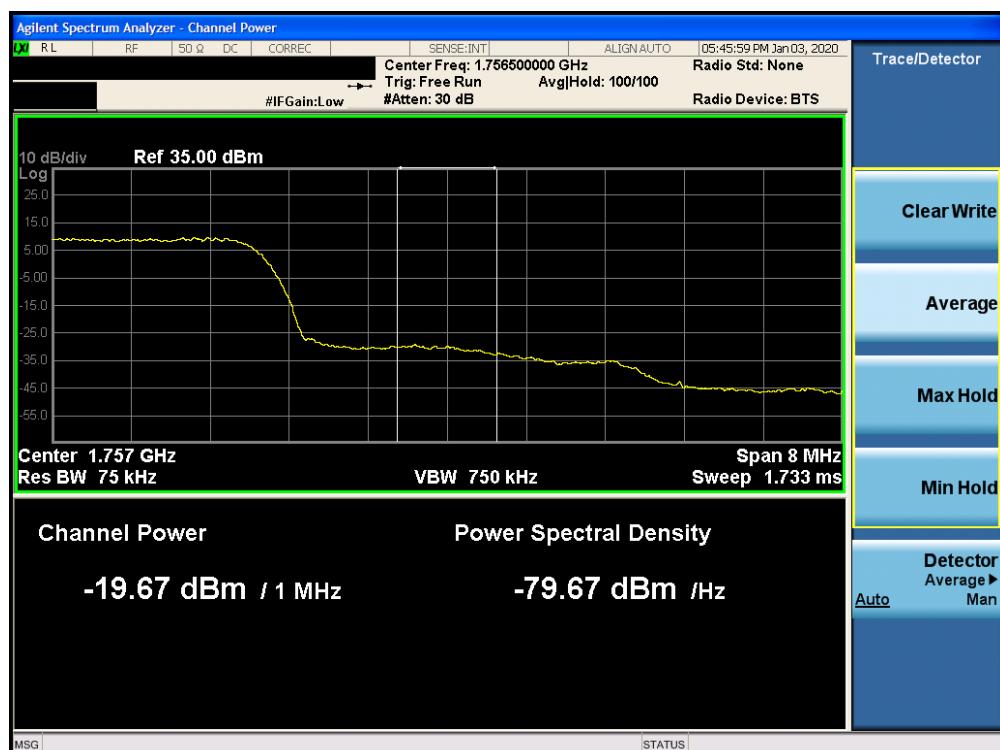


Plot 7-64. 4MHz Span Plot (AWS WCDMA Mode - High Channel)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 51 of 113

PCS WCDMA Mode



Plot 7-65. Band Edge Plot (PCS WCDMA Mode - Low Channel)

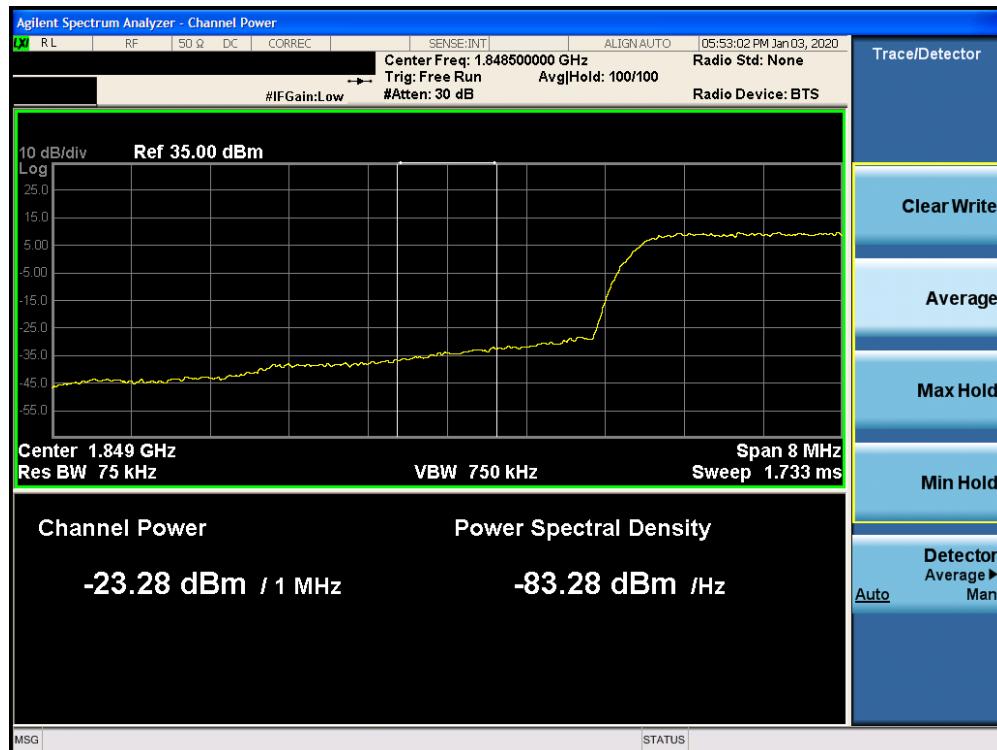

Plot 7-66. 4MHz Span Plot (PCS WCDMA Mode - Low Channel)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 52 of 113



Plot 7-67. Band Edge Plot (PCS WCDMA Mode - High Channel)



Plot 7-68. 4MHz Span Plot (PCS WCDMA Mode - High Channel)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 53 of 113



FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 54 of 113

7.5 Peak-Average Ratio

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 5.7.1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

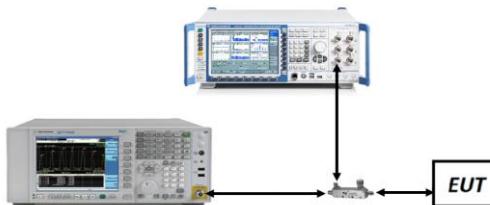


Figure 7-4. Test Instrument & Measurement Setup

Test Notes

1. All ports were tested and only the worst case data were reported.
2. Refer to Table 2-1 Section 2.3 of this test report for correlation between Antennas and Ports.

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 55 of 113


Mode	Average Power [dBm]	PAR at 0.1% [dB]	Limit [dB]	Margin [dB]
GPRS850	32.22	0.26	13.0	-12.74
EDGE850	27.50	0.27	13.0	-12.73
WCDMA850	25.48	3.25	13.0	-9.75
WCDMA1700	25.52	3.24	13.0	-9.76
GPRS1900	30.42	0.20	13.0	-12.80
EDGE1900	25.51	0.27	13.0	-12.73
WCDMA1900	25.68	3.41	13.0	-9.59

Table 7-3. Peak-Average Ratio Results




Plot 7-69. Peak-Average Ratio Plot (Cellular GPRS Mode)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 56 of 113

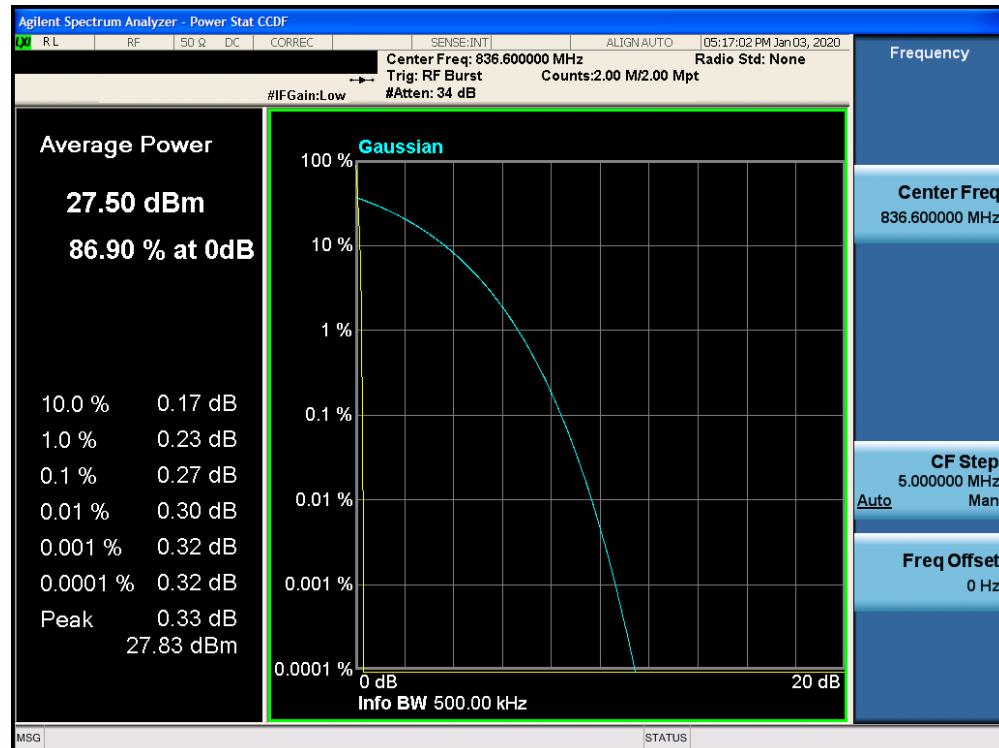


Plot 7-70. Peak-Average Ratio Plot (EDGE850 Mode)

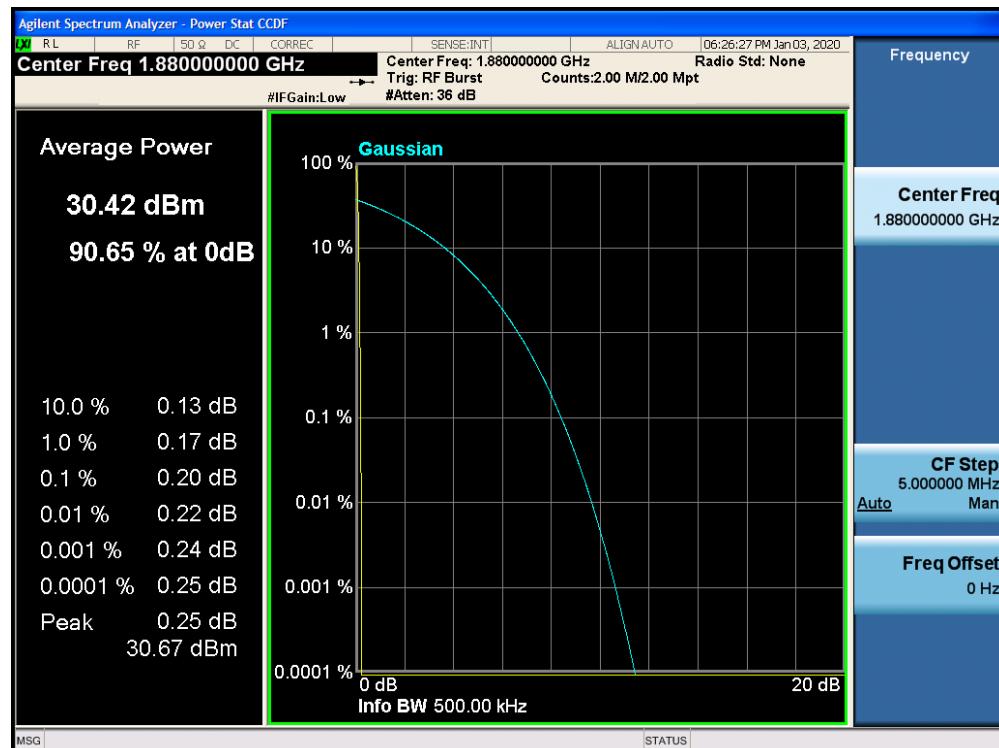

Plot 7-71. Peak-Average Ratio Plot (PCS GPRS Mode)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 57 of 113

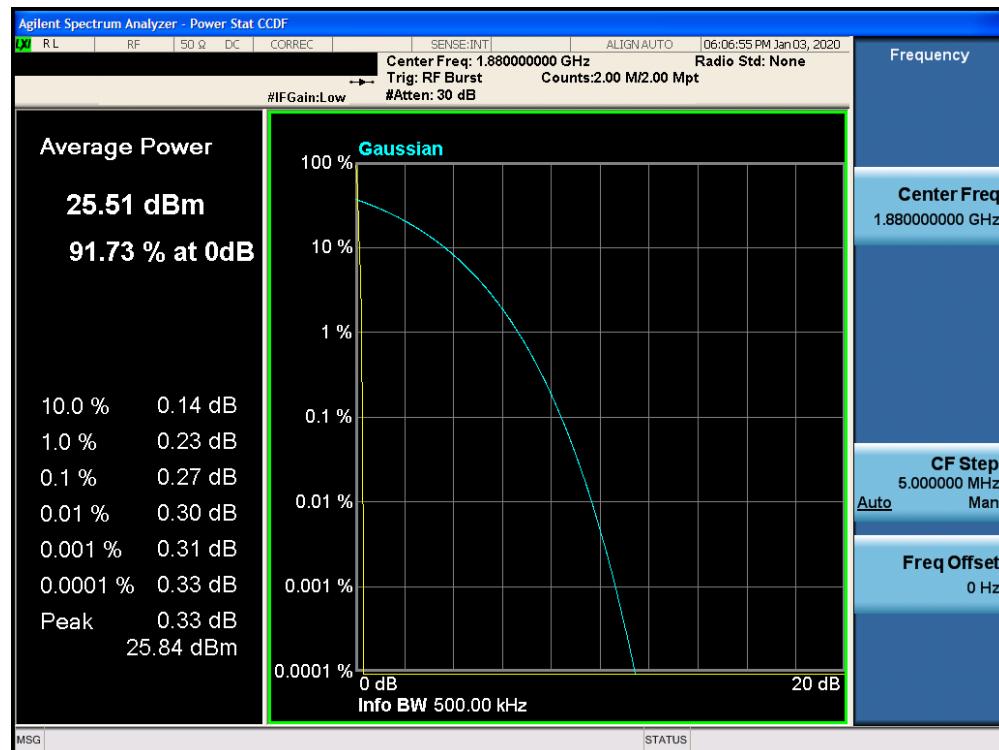


Plot 7-72. Peak-Average Ratio Plot (EDGE1900 Mode)



Plot 7-73. Peak-Average Ratio Plot (Cellular WCDMA Mode)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 58 of 113

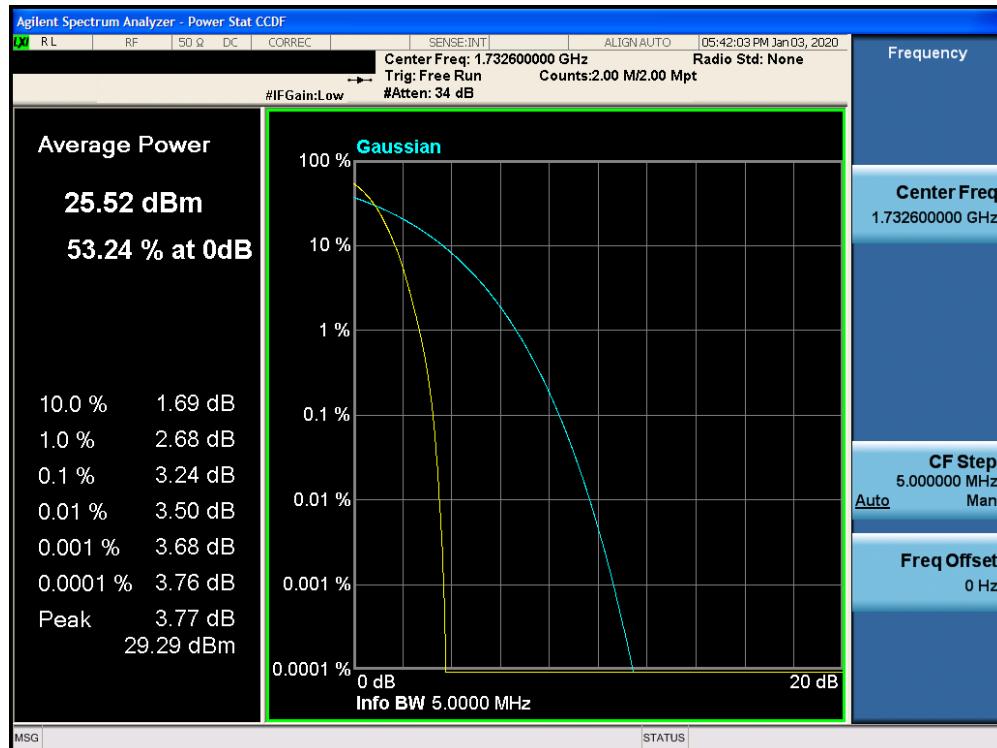

Plot 7-74. Peak-Average Ratio Plot (AWS WCDMA Mode)



Plot 7-75. Peak-Average Ratio Plot (PCS WCDMA Mode)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 59 of 113

7.6 Radiated Power (ERP/EIRP)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

Test Settings

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured is:

$$\text{ERP/EIRP} = \text{PMes} - \text{LC} + \text{GT}$$

Where:

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMes, typically dBW or dBm)

PMes = measured transmitter output power or PSD, in dBW or dBm

LC = signal attenuation in the connecting cable between the transmitter and antenna in dB

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-5. ERP/EIRP Measurement Setup

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 60 of 113



Test Notes

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 3) The Ant. Gains (GT) are listed in dBi.

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 61 of 113

7.6.1 Port A Radiated Power (ERP/EIRP)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
824.20	GPRS850	33.01	-0.70	30.16	1.038	38.45	-8.29	32.31	1.702	40.61	-8.30
836.60	GPRS850	32.95	-0.70	30.10	1.023	38.45	-8.35	32.25	1.679	40.61	-8.36
848.80	GPRS850	32.89	-0.70	30.04	1.009	38.45	-8.41	32.19	1.656	40.61	-8.42
824.20	EDGE850	27.68	-0.70	24.83	0.304	38.45	-13.62	26.98	0.499	40.61	-13.63

Table 7-4. ERP/EIRP (Cellular GPRS)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
826.40	WCDMA850	25.68	-0.70	22.83	0.192	38.45	-15.62	24.98	0.315	40.61	-15.63
836.60	WCDMA850	25.53	-0.70	22.68	0.185	38.45	-15.77	24.83	0.304	40.61	-15.78
846.60	WCDMA850	25.63	-0.70	22.78	0.190	38.45	-15.67	24.93	0.311	40.61	-15.68

Table 7-5. ERP/EIRP (Cellular WCDMA)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1712.40	WCDMA1700	25.70	-2.20	23.50	0.224	30.00	-6.50
1732.60	WCDMA1700	25.54	-2.20	23.34	0.216	30.00	-6.66
1752.60	WCDMA1700	25.58	-2.20	23.38	0.218	30.00	-6.62

Table 7-6. EIRP (AWS WCDMA)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GPRS1900	30.75	-2.20	28.55	0.716	33.01	-4.46
1880.00	GPRS1900	30.64	-2.20	28.44	0.698	33.01	-4.57
1909.80	GPRS1900	30.48	-2.20	28.28	0.673	33.01	-4.73
1850.20	EDGE1900	25.73	-2.20	23.53	0.225	33.01	-9.48

Table 7-7. EIRP (PCS GPRS)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	25.70	-2.20	23.50	0.224	33.01	-9.51
1880.00	WCDMA1900	25.45	-2.20	23.25	0.211	33.01	-9.76
1907.60	WCDMA1900	25.48	-2.20	23.28	0.213	33.01	-9.73

Table 7-8. EIRP (PCS WCDMA)

FCC ID: BCGA2068	MEASUREMENT REPORT (CERTIFICATION)						Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device					Page 62 of 113

7.6.2 Port B Radiated Power (ERP/EIRP)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
824.20	GPRS850	31.74	-0.60	28.99	0.793	38.45	-9.46	31.14	1.300	40.61	-9.47
836.60	GPRS850	31.63	-0.60	28.88	0.773	38.45	-9.57	31.03	1.268	40.61	-9.58
848.80	GPRS850	31.55	-0.60	28.80	0.759	38.45	-9.65	30.95	1.245	40.61	-9.66
824.20	EDGE850	25.65	-0.60	22.90	0.195	38.45	-15.55	25.05	0.320	40.61	-15.56

Table 7-9. ERP/EIRP (Cellular GPRS)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
826.40	WCDMA850	24.50	-0.60	21.75	0.150	38.45	-16.70	23.90	0.245	40.61	-16.71
836.60	WCDMA850	24.26	-0.60	21.51	0.142	38.45	-16.94	23.66	0.232	40.61	-16.95
846.60	WCDMA850	24.20	-0.60	21.45	0.140	38.45	-17.00	23.60	0.229	40.61	-17.01

Table 7-10. ERP/EIRP (Cellular WCDMA)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1712.40	WCDMA1700	23.09	-2.70	20.39	0.109	30.00	-9.61
1732.50	WCDMA1700	23.02	-2.70	20.32	0.108	30.00	-9.68
1752.50	WCDMA1700	23.25	-2.70	20.55	0.114	30.00	-9.45

Table 7-11. EIRP (AWS WCDMA)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GPRS1900	28.25	-2.60	25.65	0.367	33.01	-7.36
1880.00	GPRS1900	28.09	-2.60	25.49	0.354	33.01	-7.52
1909.80	GPRS1900	27.89	-2.60	25.29	0.338	33.01	-7.72
1850.20	EDGE1900	23.11	-2.60	20.51	0.112	33.01	-12.50

Table 7-12. EIRP (PCS GPRS)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	23.14	-2.60	20.54	0.113	33.01	-12.47
1880.00	WCDMA1900	23.25	-2.60	20.65	0.116	33.01	-12.36
1907.60	WCDMA1900	23.19	-2.60	20.59	0.115	33.01	-12.42

Table 7-13. EIRP (PCS WCDMA)

FCC ID: BCGA2068	MEASUREMENT REPORT (CERTIFICATION)						Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device					

7.6.3 Port C Radiated Power (ERP/EIRP)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1712.40	WCDMA1700	24.87	-1.50	23.37	0.217	30.00	-6.63
1732.60	WCDMA1700	24.98	-1.50	23.48	0.223	30.00	-6.52
1752.60	WCDMA1700	25.00	-1.50	23.50	0.224	30.00	-6.50

Table 7-14. EIRP (AWS WCDMA)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GPRS1900	30.25	-1.70	28.55	0.716	33.01	-4.46
1880.00	GPRS1900	30.22	-1.70	28.52	0.711	33.01	-4.49
1909.80	GPRS1900	30.19	-1.70	28.49	0.706	33.01	-4.52
1850.20	EDGE1900	25.21	-1.70	23.51	0.224	33.01	-9.50

Table 7-15. EIRP (PCS GPRS)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	24.90	-1.70	23.20	0.209	33.01	-9.81
1880.00	WCDMA1900	25.00	-1.70	23.30	0.214	33.01	-9.71
1907.60	WCDMA1900	24.99	-1.70	23.29	0.213	33.01	-9.72

Table 7-16. EIRP (PCS WCDMA)

FCC ID: BCGA2068	 PCTEST	MEASUREMENT REPORT (CERTIFICATION)				Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device				

7.6.4 Port D Radiated Power (ERP/EIRP)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1712.40	WCDMA1700	22.78	-1.20	21.58	0.144	30.00	-8.42
1732.50	WCDMA1700	23.00	-1.20	21.80	0.151	30.00	-8.20
1752.50	WCDMA1700	23.00	-1.20	21.80	0.151	30.00	-8.20

Table 7-17. EIRP (AWS WCDMA)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GPRS1900	28.25	-0.30	27.95	0.624	33.01	-5.06
1880.00	GPRS1900	28.13	-0.30	27.83	0.607	33.01	-5.18
1909.80	GPRS1900	28.10	-0.30	27.80	0.603	33.01	-5.21
1850.20	EDGE1900	23.17	-0.30	22.87	0.194	33.01	-10.14

Table 7-18. EIRP (PCS GPRS)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	23.00	-0.30	22.70	0.186	33.01	-10.31
1880.00	WCDMA1900	23.00	-0.30	22.70	0.186	33.01	-10.31
1907.60	WCDMA1900	22.99	-0.30	22.69	0.186	33.01	-10.32

Table 7-19. EIRP (PCS WCDMA)

FCC ID: BCGA2068	 PCTEST	MEASUREMENT REPORT (CERTIFICATION)				Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device				

7.7 Radiated Spurious Emissions Measurements

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW \geq 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points \geq 2 x span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: BCGA2068	 PCTEST [®]		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 66 of 113	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

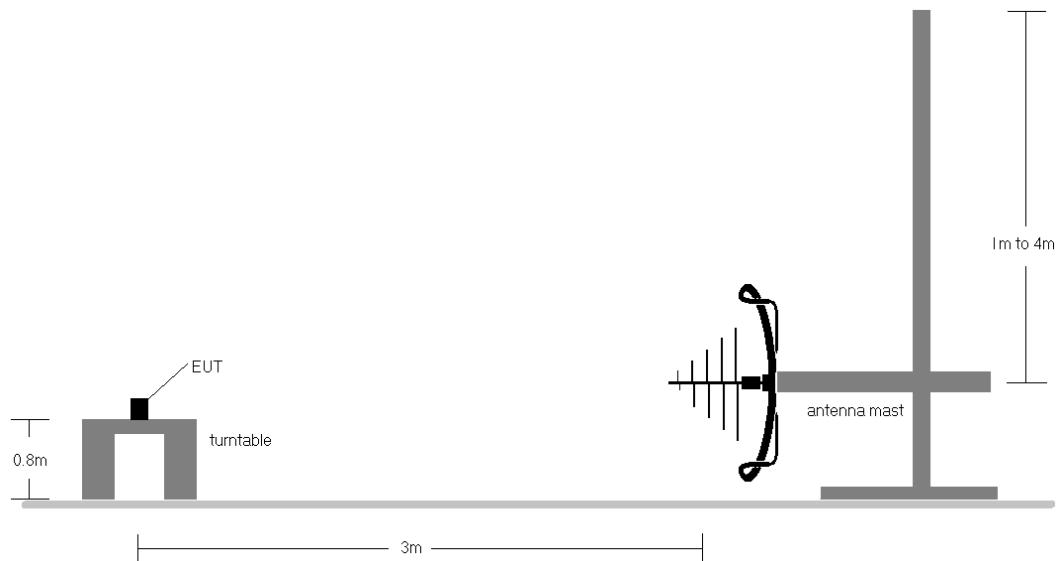


Figure 7-6. Test Instrument & Measurement Setup < 1GHz

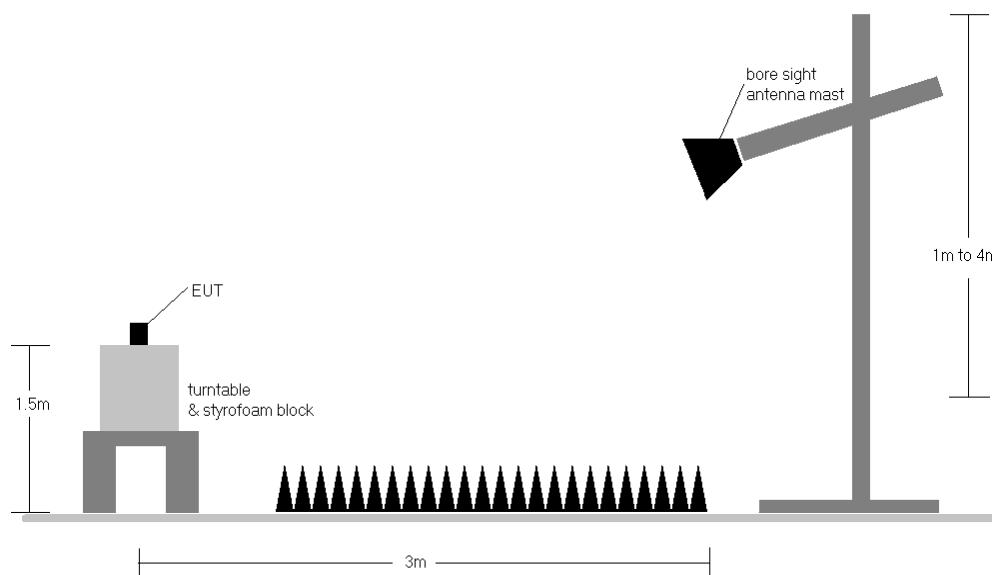


Figure 7-7. Test Instrument & Measurement Setup > 1GHz

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 67 of 113


Test Notes

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 3) This unit was tested with its standard battery.
- 4) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 5) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 6) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 7) The "-" shown in the following RSE tables are used to denote a noise floor measurement.
- 8) Below 1GHz prescan plot shows no significant emissions.


FCC ID: BCGA2068	 PCTEST [®]		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 68 of 113	

7.7.1 ANT 3 (Port A) Radiated Spurious Emissions Measurements

Cellular GPRS Mode

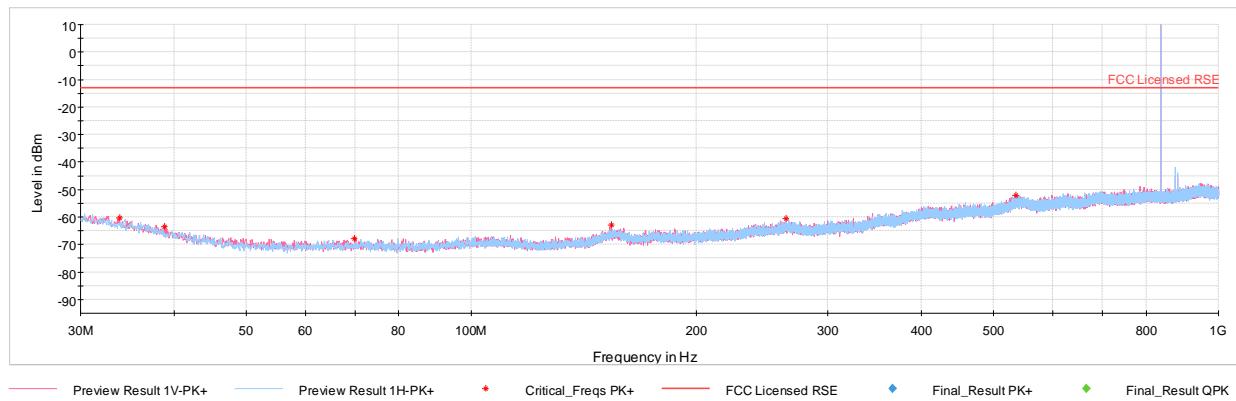

Plot 7-76. Radiated Spurious Plot Below 1GHz (Cellular GPRS Mode) with AC/DC Adapter

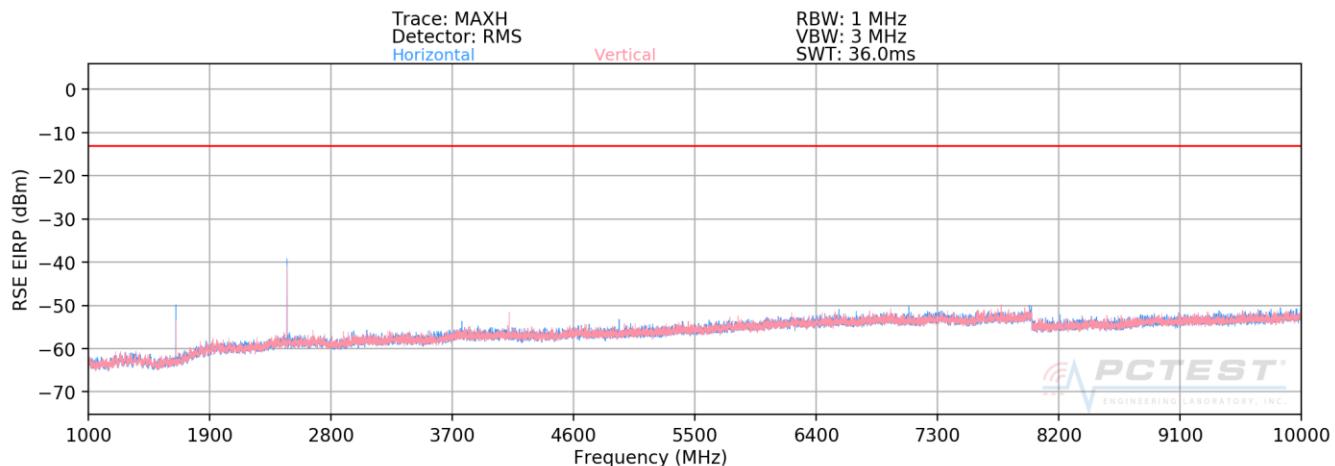

Plot 7-77. Radiated Spurious Plot Above 1GHz (Cellular GPRS Mode)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 69 of 113

OPERATING FREQUENCY:	824.20	MHz
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1648.40	V	162	107	-57.36	5.38	-51.98	-39.0
2472.60	V	106	107	-47.37	5.91	-41.47	-28.5
3296.80	V	-	-	-62.07	7.82	-54.25	-41.3
4121.00	V	203	168	-62.11	8.97	-53.14	-40.1
4945.20	V	-	-	-62.34	10.05	-52.29	-39.3
5769.40	V	-	-	-61.49	10.64	-50.85	-37.9
6593.60	V	-	-	-61.73	10.98	-50.75	-37.8

Table 7-20. Radiated Spurious Data (Cellular GPRS Mode – Ch. 128)

OPERATING FREQUENCY:	836.60	MHz
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	V	130	117	-55.80	5.60	-50.20	-37.2
2509.80	V	223	136	-45.02	5.90	-39.12	-26.1
3346.40	V	144	301	-60.38	7.95	-52.44	-39.4
4183.00	V	155	113	-60.34	9.13	-51.21	-38.2
5019.60	V	-	-	-61.57	10.00	-51.57	-38.6
5856.20	V	110	194	-59.30	10.62	-48.68	-35.7
6692.80	V	-	-	-62.08	11.16	-50.92	-37.9
7529.40	V	-	-	-62.36	11.99	-50.38	-37.4
8366.00	V	-	-	-63.72	12.78	-50.94	-37.9

Table 7-21. Radiated Spurious Data (Cellular GPRS Mode – Ch. 190)

FCC ID: BCGA2068	 PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 70 of 113




OPERATING FREQUENCY: 848.80 MHz
MODULATION SIGNAL: GPRS (GMSK)
DISTANCE: 3 meters
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1697.60	H	141	180	-57.81	5.62	-52.20	-39.2
2546.40	V	240	129	-52.98	6.02	-46.96	-34.0
3395.20	V	156	197	-59.37	8.09	-51.28	-38.3
4244.00	V	211	112	-61.88	9.20	-52.68	-39.7
5092.80	V	-	-	-62.48	10.09	-52.39	-39.4
5941.60	V	-	-	-61.78	10.67	-51.12	-38.1
6790.40	V	-	-	-61.24	11.29	-49.95	-36.9

Table 7-22. Radiated Spurious Data (Cellular GPRS Mode – Ch. 251)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 71 of 113

Cellular WCDMA Mode

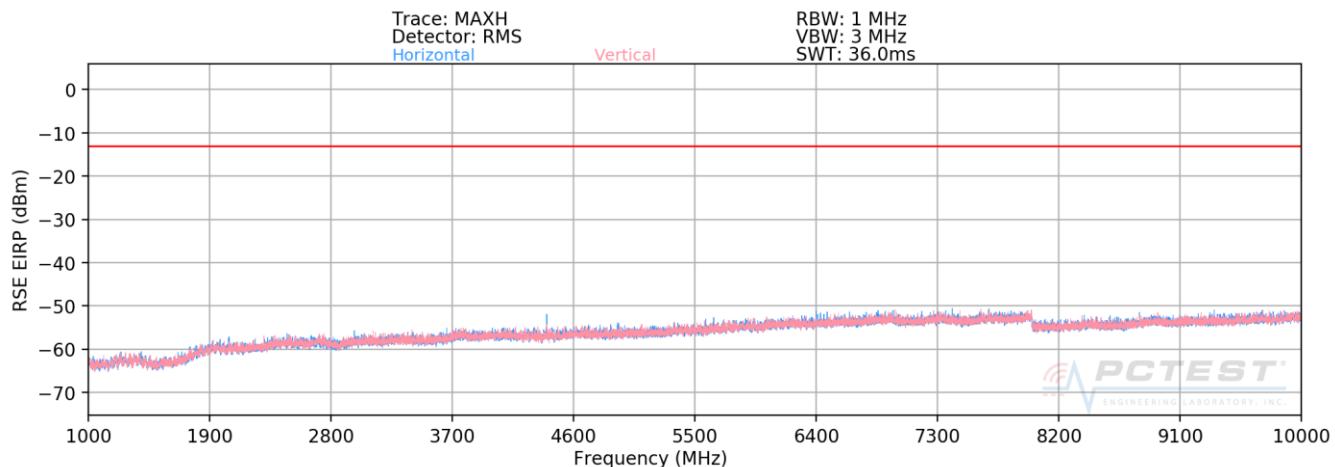

Plot 7-78. Radiated Spurious Plot Above 1GHz (Cellular WCDMA Mode)

OPERATING FREQUENCY:	826.40	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1652.80	V	198	104	-72.64	5.43	-67.21	-54.2
2479.20	V	-	-	-69.83	5.93	-63.90	-50.9
3305.60	V	-	-	-70.66	7.84	-62.82	-49.8
4132.00	V	-	-	-71.26	8.99	-62.26	-49.3
4400.00	H	125	105	-70.38	9.35	-61.03	-48.0

Table 7-23. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4132)

FCC ID: BCGA2068	 PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 72 of 113

OPERATING FREQUENCY: 836.60 MHz
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	V	-	-	-73.58	5.60	-67.98	-55.0
2509.80	V	-	-	-69.78	5.90	-63.88	-50.9
3346.40	V	-	-	-70.72	7.95	-62.78	-49.8

Table 7-24. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4183)

OPERATING FREQUENCY: 846.60 MHz
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1693.20	V	-	-	-73.40	5.64	-67.76	-54.8
2539.80	V	-	-	-69.77	5.98	-63.79	-50.8
3386.40	V	-	-	-71.15	8.07	-63.08	-50.1
4400.00	V	117	97	-69.47	9.35	-60.12	-47.1

Table 7-25. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4233)

FCC ID: BCGA2068	 PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 73 of 113

7.7.2 ANT 4b (Port A) Radiated Spurious Emissions Measurements

AWS WCDMA Mode

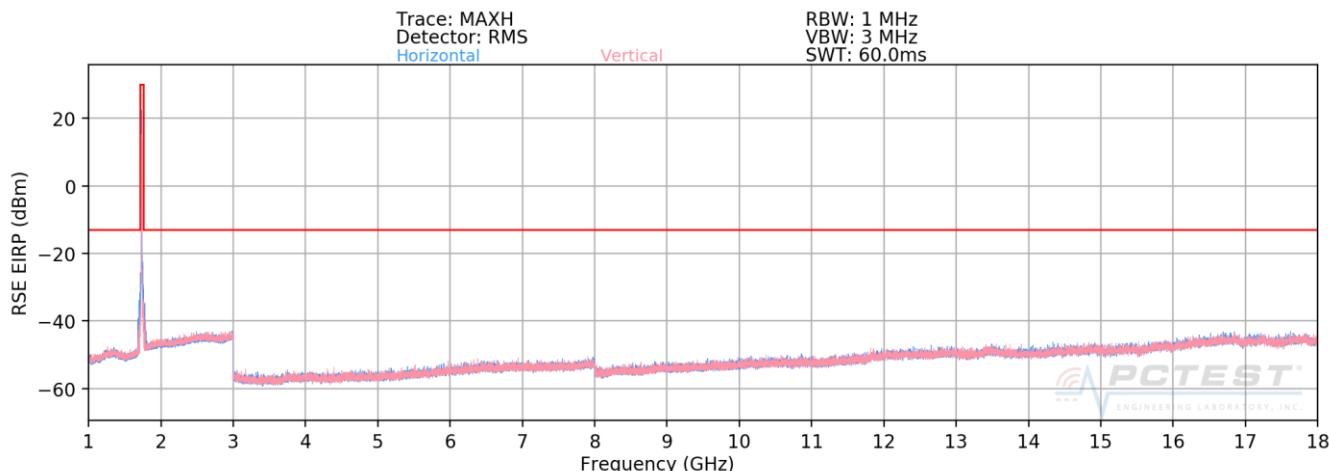

Plot 7-79. Radiated Spurious Plot Above 1GHz (AWS WCDMA Mode)

OPERATING FREQUENCY:	1712.40	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3424.80	H	-	-	-70.91	8.12	-62.80	-49.8
5137.20	H	-	-	-71.44	10.11	-61.33	-48.3
6849.60	H	-	-	-70.63	11.37	-59.26	-46.3

Table 7-26. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1312)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 74 of 113

OPERATING FREQUENCY:	1732.60	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3465.20	H	-	-	-70.58	8.11	-62.47	-49.5
5197.80	H	-	-	-71.56	10.23	-61.33	-48.3
6930.40	H	-	-	-70.69	11.41	-59.28	-46.3


Table 7-27. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1413)

OPERATING FREQUENCY:	1752.60	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3505.20	H	-	-	-70.52	8.07	-62.46	-49.5
5257.80	H	-	-	-71.28	10.27	-61.01	-48.0
7010.40	H	-	-	-70.89	11.51	-59.38	-46.4

Table 7-28. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1513)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 75 of 113

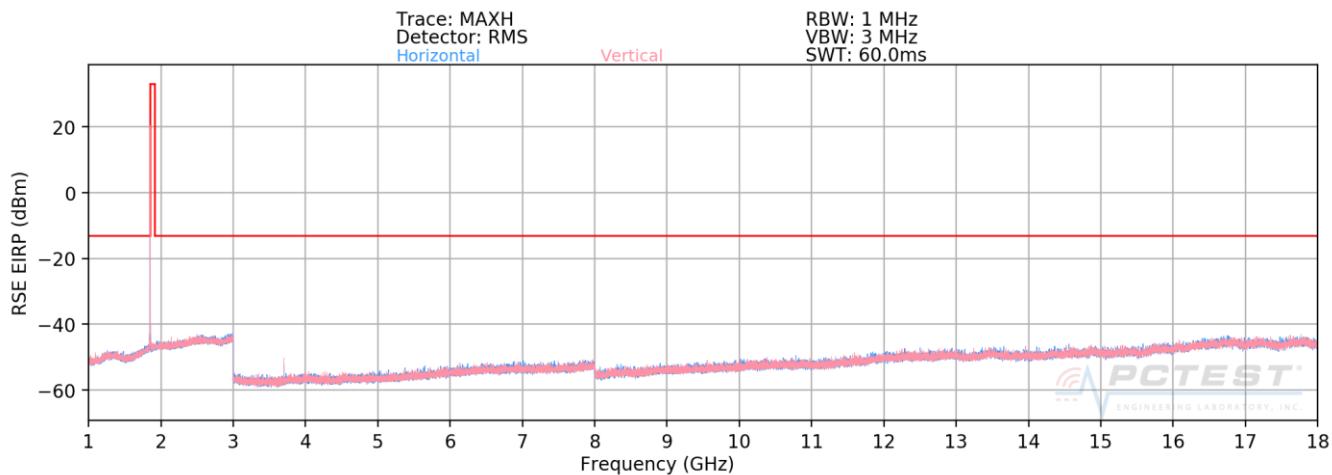PCS GPRS Mode

Plot 7-80. Radiated Spurious Plot Above 1GHz (PCS GPRS Mode)

OPERATING FREQUENCY: 1850.20 MHz
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3700.40	H	140	248	-60.51	8.41	-52.11	-39.1
5550.60	H	107	236	-61.68	10.72	-50.95	-38.0
7400.80	H	-	-	-61.09	11.88	-49.21	-36.2
9251.00	H	-	-	-62.64	13.31	-49.34	-36.3
11101.20	H	-	-	-59.50	13.23	-46.27	-33.3

Table 7-29. Radiated Spurious Data (PCS GPRS Mode – Ch. 512)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 76 of 113

OPERATING FREQUENCY: 1880.00 MHz
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	120	262	-58.33	8.47	-49.86	-36.9
5640.00	H	124	258	-60.12	10.69	-49.43	-36.4
7520.00	H	-	-	-62.04	11.99	-50.05	-37.1
9400.00	H	-	-	-63.30	13.36	-49.94	-36.9
11280.00	H	-	-	-61.48	13.22	-48.25	-35.3

Table 7-30. Radiated Spurious Data (PCS GPRS Mode – Ch. 661)


OPERATING FREQUENCY: 1909.80 MHz
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3819.60	H	175	38	-60.43	8.65	-51.78	-38.8
5729.40	H	115	234	-62.11	10.67	-51.44	-38.4
7639.20	H	-	-	-61.88	12.16	-49.71	-36.7
9549.00	H	-	-	-63.38	13.19	-50.19	-37.2
11458.80	H	-	-	-60.58	13.27	-47.31	-34.3

Table 7-31. Radiated Spurious Data (PCS GPRS Mode – Ch. 810)

FCC ID: BCGA2068	 PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 77 of 113

PCS WCDMA Mode

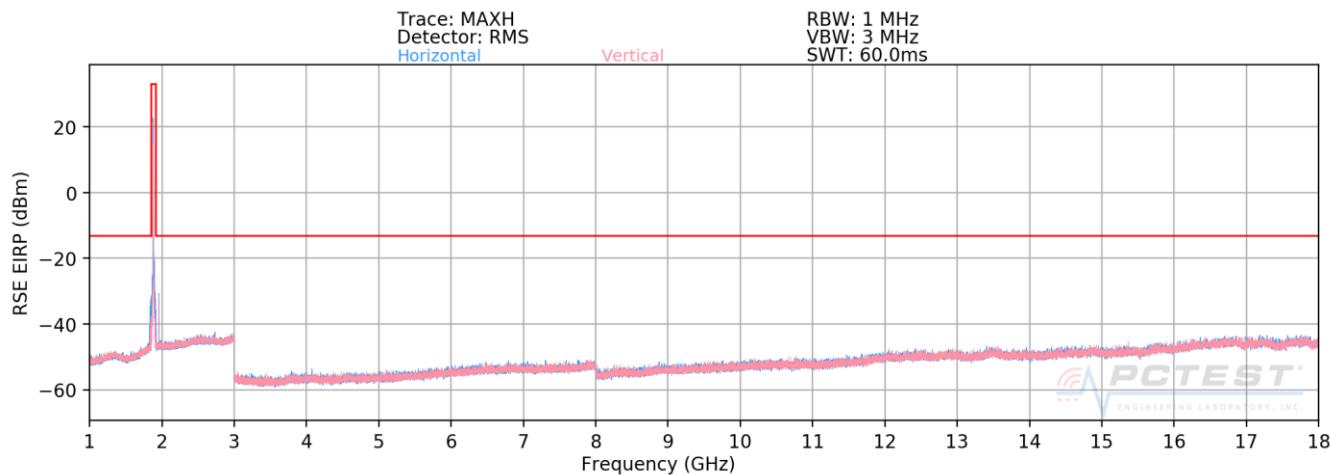

Plot 7-81. Radiated Spurious Plot Above 1GHz (PCS WCDMA Mode)

OPERATING FREQUENCY:	1852.40	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3704.80	H	-	-	-70.44	8.41	-62.02	-49.0
5557.20	H	-	-	-71.54	10.72	-60.82	-47.8
7409.60	H	-	-	-71.23	11.89	-59.34	-46.3

Table 7-32. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)

OPERATING FREQUENCY:	1880.00	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	-	-	-70.50	8.47	-62.03	-49.0
5640.00	H	-	-	-71.12	10.69	-60.43	-47.4
7520.00	H	-	-	-71.33	11.99	-59.34	-46.3

Table 7-33. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device			

OPERATING FREQUENCY: 1907.60 MHz
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3815.20	H	-	-	-70.49	8.62	-61.87	-48.9
5722.80	H	-	-	-71.09	10.66	-60.42	-47.4
7630.40	H	-	-	-71.03	12.16	-58.87	-45.9

Table 7-34. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 79 of 113

7.7.3 ANT 1 (Port B) Radiated Spurious Emissions Measurements

Cellular GPRS Mode

OPERATING FREQUENCY:	824.20	MHz
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1648.40	H	138	150	-58.00	5.38	-52.62	-39.6
2472.60	V	151	175	-58.75	5.91	-52.85	-39.8
3296.80	H	193	264	-58.44	7.82	-50.62	-37.6
4121.00	H	-	-	-62.38	8.97	-53.41	-40.4
4945.20	H	-	-	-63.07	10.05	-53.02	-40.0
5769.40	H	-	-	-61.64	10.64	-51.00	-38.0

Table 7-35. Radiated Spurious Data (Cellular GPRS Mode – Ch. 128)

OPERATING FREQUENCY:	836.60	MHz
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	H	237	270	-59.44	5.60	-53.84	-40.8
2509.80	V	140	112	-60.01	5.90	-54.11	-41.1
3346.40	H	171	261	-58.24	7.95	-50.30	-37.3
4183.00	V	-	-	-62.14	9.13	-53.01	-40.0
5019.60	V	-	-	-62.80	10.00	-52.80	-39.8
5856.20	V	-	-	-61.79	10.62	-51.17	-38.2

Table 7-36. Radiated Spurious Data (Cellular GPRS Mode – Ch. 190)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 80 of 113



OPERATING FREQUENCY: 848.80 MHz
MODULATION SIGNAL: GPRS (GMSK)
DISTANCE: 3 meters
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1697.60	H	125	95	-59.96	5.62	-54.35	-41.3
2546.40	V	159	107	-59.18	6.02	-53.16	-40.2
3395.20	H	212	261	-56.25	8.09	-48.16	-35.2
4244.00	V	-	-	-62.16	9.20	-52.96	-40.0
5092.80	V	-	-	-62.69	10.09	-52.60	-39.6
5941.60	V	-	-	-61.92	10.67	-51.26	-38.3

Table 7-37. Radiated Spurious Data (Cellular GPRS Mode – Ch. 251)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 81 of 113

Cellular WCDMA Mode

OPERATING FREQUENCY:	826.40	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1652.80	H	130	95	-72.70	5.43	-67.27	-54.3
2479.20	V	-	-	-69.95	5.93	-64.02	-51.0
3305.60	V	-	-	-70.76	7.84	-62.92	-49.9
4132.00	V	-	-	-71.53	8.99	-62.53	-49.5

Table 7-38. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4132)

OPERATING FREQUENCY:	836.60	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	V	308	184	-72.97	5.60	-67.37	-54.4
2509.80	V	-	-	-69.59	5.90	-63.69	-50.7
3346.40	V	-	-	-71.02	7.95	-63.08	-50.1
4183.00	V	-	-	-71.50	9.13	-62.37	-49.4

Table 7-39. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4183)

FCC ID: BCGA2068	 PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 82 of 113



OPERATING FREQUENCY: 846.60 MHz
MODULATION SIGNAL: WCDMA
DISTANCE: 3 meters
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1693.20	V	-	-	-73.19	5.64	-67.55	-54.5
2539.80	V	-	-	-69.67	5.98	-63.69	-50.7
3386.40	V	-	-	-71.29	8.07	-63.22	-50.2

Table 7-40. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4233)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 83 of 113

7.7.4 ANT 2b (Port B) Radiated Spurious Emissions Measurements

AWS WCDMA Mode

OPERATING FREQUENCY:	1712.40	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3424.80	H	-	-	-70.81	8.12	-62.70	-49.7
5137.20	H	-	-	-71.75	10.11	-61.64	-48.6
6849.60	H	-	-	-70.41	11.37	-59.04	-46.0

Table 7-41. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1312)

OPERATING FREQUENCY:	1732.60	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3465.20	H	-	-	-70.70	8.11	-62.59	-49.6
5197.80	H	-	-	-71.55	10.23	-61.32	-48.3
6930.40	H	-	-	-70.77	11.41	-59.36	-46.4

Table 7-42. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1413)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 84 of 113



OPERATING FREQUENCY: 1752.60 MHz
MODULATION SIGNAL: WCDMA
DISTANCE: 3 meters
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3505.20	h	-	-	-70.40	8.07	-62.34	-49.3
5257.80	h	-	-	-71.66	10.27	-61.39	-48.4
7010.40	h	-	-	-70.73	11.51	-59.22	-46.2

Table 7-43. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1513)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 85 of 113

PCS GPRS Mode

OPERATING FREQUENCY:	1850.20	MHz
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3700.40	H	111	250	-59.92	8.41	-51.52	-38.5
5550.60	H	-	-	-62.78	10.72	-52.05	-39.1
7400.80	H	-	-	-62.28	11.88	-50.40	-37.4
9251.00	H	-	-	-63.14	13.31	-49.84	-36.8

Table 7-44. Radiated Spurious Data (PCS GPRS Mode – Ch. 512)

OPERATING FREQUENCY:	1880.00	MHz
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	V	122	344	-59.97	8.47	-51.50	-38.5
5640.00	H	-	-	-62.10	10.69	-51.41	-38.4
7520.00	H	-	-	-62.42	11.99	-50.43	-37.4
9400.00	H	-	-	-63.57	13.36	-50.21	-37.2

Table 7-45. Radiated Spurious Data (PCS GPRS Mode – Ch. 661)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 86 of 113



OPERATING FREQUENCY: 1909.80 MHz
MODULATION SIGNAL: GPRS (GMSK)
DISTANCE: 3 meters
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3819.60	H	-	-	-61.57	8.65	-52.92	-39.9
5729.40	H	-	-	-62.59	10.67	-51.92	-38.9
7639.20	H	-	-	-62.13	12.16	-49.96	-37.0

Table 7-46. Radiated Spurious Data (PCS GPRS Mode – Ch. 810)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 87 of 113



PCS WCDMA Mode

OPERATING FREQUENCY:	1852.40	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3704.80	H	-	-	-70.46	8.41	-62.04	-49.0
5557.20	H	-	-	-71.46	10.72	-60.74	-47.7
7409.60	H	-	-	-71.22	11.89	-59.33	-46.3

Table 7-47. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)

OPERATING FREQUENCY:	1880.00	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	-	-	-69.99	8.47	-61.52	-48.5
5640.00	H	-	-	-71.40	10.69	-60.71	-47.7
7520.00	H	-	-	-71.34	11.99	-59.35	-46.4

Table 7-48. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 88 of 113



OPERATING FREQUENCY: 1907.60 MHz
MODULATION SIGNAL: WCDMA
DISTANCE: 3 meters
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3815.20	H	-	-	-70.04	8.62	-61.42	-48.4
5722.80	H	-	-	-71.32	10.66	-60.65	-47.7
7630.40	H	-	-	-71.25	12.16	-59.09	-46.1

Table 7-49. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 89 of 113

7.7.5 ANT 4a (Port C) Radiated Spurious Emissions Measurements

AWS WCDMA Mode

OPERATING FREQUENCY:	1712.40	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3424.80	H	-	-	-70.62	8.12	-62.51	-49.5
5137.20	H	-	-	-71.50	10.11	-61.39	-48.4
6849.60	H	-	-	-70.75	11.37	-59.38	-46.4

Table 7-50. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1312)

OPERATING FREQUENCY:	1732.60	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3465.20	H	-	-	-70.63	8.11	-62.52	-49.5
5197.80	H	-	-	-71.41	10.23	-61.18	-48.2
6930.40	H	-	-	-70.87	11.41	-59.46	-46.5

Table 7-51. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1413)

FCC ID: BCGA2068	 PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 90 of 113



OPERATING FREQUENCY: 1752.60 MHz
MODULATION SIGNAL: WCDMA
DISTANCE: 3 meters
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3505.20	H	-	-	-70.74	8.07	-62.68	-49.7
5257.80	H	-	-	-71.65	10.27	-61.38	-48.4
7010.40	H	-	-	-70.84	11.51	-59.33	-46.3

Table 7-52. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1513)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 91 of 113



PCS GPRS Mode

OPERATING FREQUENCY:	1850.20	MHz
MODULATION SIGNAL:	GSM (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3700.40	H	180	246	-59.34	8.41	-50.94	-37.9
5550.60	H	111	116	-60.95	10.72	-50.22	-37.2
7400.80	H	-	-	-61.08	11.88	-49.20	-36.2
9251.00	H	-	-	-63.74	13.31	-50.44	-37.4
11101.20	H	-	-	-61.79	13.23	-48.56	-35.6

Table 7-53. Radiated Spurious Data (PCS GSM Mode – Ch. 512)

OPERATING FREQUENCY:	1880.00	MHz
MODULATION SIGNAL:	GSM (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	V	334	87	-59.65	8.47	-51.18	-38.2
5640.00	V	-	-	-61.60	10.69	-50.91	-37.9
7520.00	V	-	-	-61.45	11.99	-49.46	-36.5
9400.00	V	-	-	-62.49	13.36	-49.13	-36.1

Table 7-54. Radiated Spurious Data (PCS GSM Mode – Ch. 661)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 92 of 113

OPERATING FREQUENCY: 1909.80 MHz
 MODULATION SIGNAL: GSM (GMSK)
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3819.60	V	299	88	-55.68	8.65	-47.03	-34.0
5729.40	V	-	-	-60.78	10.67	-50.11	-37.1
7639.20	V	-	-	-61.97	12.16	-49.80	-36.8
9549.00	V	-	-	-62.41	13.19	-49.22	-36.2

Table 7-55. Radiated Spurious Data (PCS GPRS Mode – Ch. 810)

FCC ID: BCGA2068	 PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 93 of 113



PCS WCDMA Mode

OPERATING FREQUENCY:	1852.40	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3704.80	H	-	-	-70.54	8.41	-62.12	-49.1
5557.20	H	-	-	-71.48	10.72	-60.76	-47.8
7409.60	H	-	-	-71.32	11.89	-59.43	-46.4

Table 7-56. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)

OPERATING FREQUENCY:	1880.00	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	-	-	-70.41	8.47	-61.94	-48.9
5640.00	H	-	-	-70.98	10.69	-60.29	-47.3
7520.00	H	-	-	-71.46	11.99	-59.47	-46.5

Table 7-57. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 94 of 113

OPERATING FREQUENCY: 1907.60 MHz
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3815.20	H	-	-	-69.87	8.62	-61.25	-48.2
5722.80	H	-	-	-71.10	10.66	-60.43	-47.4
7630.40	H	-	-	-71.00	12.16	-58.84	-45.8

Table 7-58. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 95 of 113

7.7.6 ANT 2a (Port D) Radiated Spurious Emissions Measurements

AWS WCDMA Mode

OPERATING FREQUENCY:	1712.40	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3424.80	H	-	-	-70.79	8.12	-62.68	-49.7
5137.20	H	-	-	-71.66	10.11	-61.55	-48.5
6849.60	H	-	-	-70.61	11.37	-59.24	-46.2

Table 7-59. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1312)

OPERATING FREQUENCY:	1732.60	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3465.20	H	-	-	-70.64	8.11	-62.53	-49.5
5197.80	H	-	-	-71.52	10.23	-61.29	-48.3
6930.40	H	-	-	-70.68	11.41	-59.27	-46.3

Table 7-60. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1413)

FCC ID: BCGA2068	 PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 96 of 113



OPERATING FREQUENCY: 1752.60 MHz
MODULATION SIGNAL: WCDMA
DISTANCE: 3 meters
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3505.20	H	-	-	-70.49	8.07	-62.43	-49.4
5257.80	H	-	-	-71.69	10.27	-61.42	-48.4
7010.40	H	-	-	-70.97	11.51	-59.46	-46.5

Table 7-61. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1513)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 97 of 113



PCS GPRS Mode

OPERATING FREQUENCY:	1850.20	MHz
MODULATION SIGNAL:	GSM (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3700.40	H	145	264	-59.16	8.41	-50.76	-37.8
5550.60	H	-	-	-61.67	10.72	-50.94	-37.9
7400.80	H	-	-	-61.87	11.88	-49.99	-37.0
9251.00	H	-	-	-62.67	13.31	-49.37	-36.4

Table 7-62. Radiated Spurious Data (PCS GSM Mode – Ch. 512)

OPERATING FREQUENCY:	1880.00	MHz
MODULATION SIGNAL:	GSM (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	V	320	86	-56.06	8.47	-47.59	-34.6
5640.00	H	-	-	-61.02	10.69	-50.33	-37.3
7520.00	H	-	-	-61.90	11.99	-49.91	-36.9
9400.00	H	-	-	-62.34	13.36	-48.98	-36.0

Table 7-63. Radiated Spurious Data (PCS GSM Mode – Ch. 661)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 98 of 113



OPERATING FREQUENCY: 1909.80 MHz
MODULATION SIGNAL: GSM (GMSK)
DISTANCE: 3 meters
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3819.60	H	320	85	-54.21	8.65	-45.56	-32.6
5729.40	H	-	-	-61.60	10.67	-50.93	-37.9
7639.20	H	-	-	-61.48	12.16	-49.31	-36.3
9549.00	H	-	-	-60.47	13.19	-47.28	-34.3

Table 7-64. Radiated Spurious Data (PCS GPRS Mode – Ch. 810)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 99 of 113



PCS WCDMA Mode

OPERATING FREQUENCY:	1852.40	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3704.80	H	-	-	-70.20	8.41	-61.78	-48.8
5557.20	H	-	-	-71.54	10.72	-60.82	-47.8
7409.60	H	-	-	-71.35	11.89	-59.46	-46.5

Table 7-65. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)

OPERATING FREQUENCY:	1880.00	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	-	-	-70.22	8.47	-61.75	-48.7
5640.00	H	-	-	-71.05	10.69	-60.36	-47.4
7520.00	H	-	-	-71.35	11.99	-59.36	-46.4

Table 7-66. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 100 of 113

OPERATING FREQUENCY: 1907.60 MHz
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3815.20	H	-	-	-70.30	8.62	-61.68	-48.7
5722.80	H	-	-	-71.15	10.66	-60.48	-47.5
7630.40	H	-	-	-71.27	12.16	-59.11	-46.1

Table 7-67. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 101 of 113

7.8 Frequency Stability / Temperature Variation

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, RSS-132, and RSS-133, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5 \text{ ppm}$) of the center frequency. For Part 24, Part 27, and RSS-139, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI/TIA-603-E-2016

Test Settings

- The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup



Figure 7-8. Test Instrument & Measurement Setup

Test Notes

All ports were tested and only the worst case data were reported.

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 102 of 113

Frequency Stability / Temperature Variation

OPERATING FREQUENCY:	836,600,000	Hz
CHANNEL:	190	
REFERENCE VOLTAGE:	3.80	VDC
DEVIATION LIMIT:	± 0.00025 % or 2.5 ppm	

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	836,600,005	5	0.0000006
100 %		- 20	836,600,004	4	0.0000005
100 %		- 10	836,600,004	4	0.0000005
100 %		0	836,600,004	4	0.0000005
100 %		+ 10	836,600,005	5	0.0000006
100 %		+ 20	836,600,005	5	0.0000006
100 %		+ 30	836,600,006	6	0.0000007
100 %		+ 40	836,600,004	4	0.0000005
100 %		+ 50	836,600,004	4	0.0000005
BATT. ENDPOINT	3.20	+ 20	836,600,006	6	0.0000007

Table 7-68. Frequency Stability Data (Cellular GPRS Mode – Ch. 190)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 103 of 113

Frequency Stability / Temperature Variation

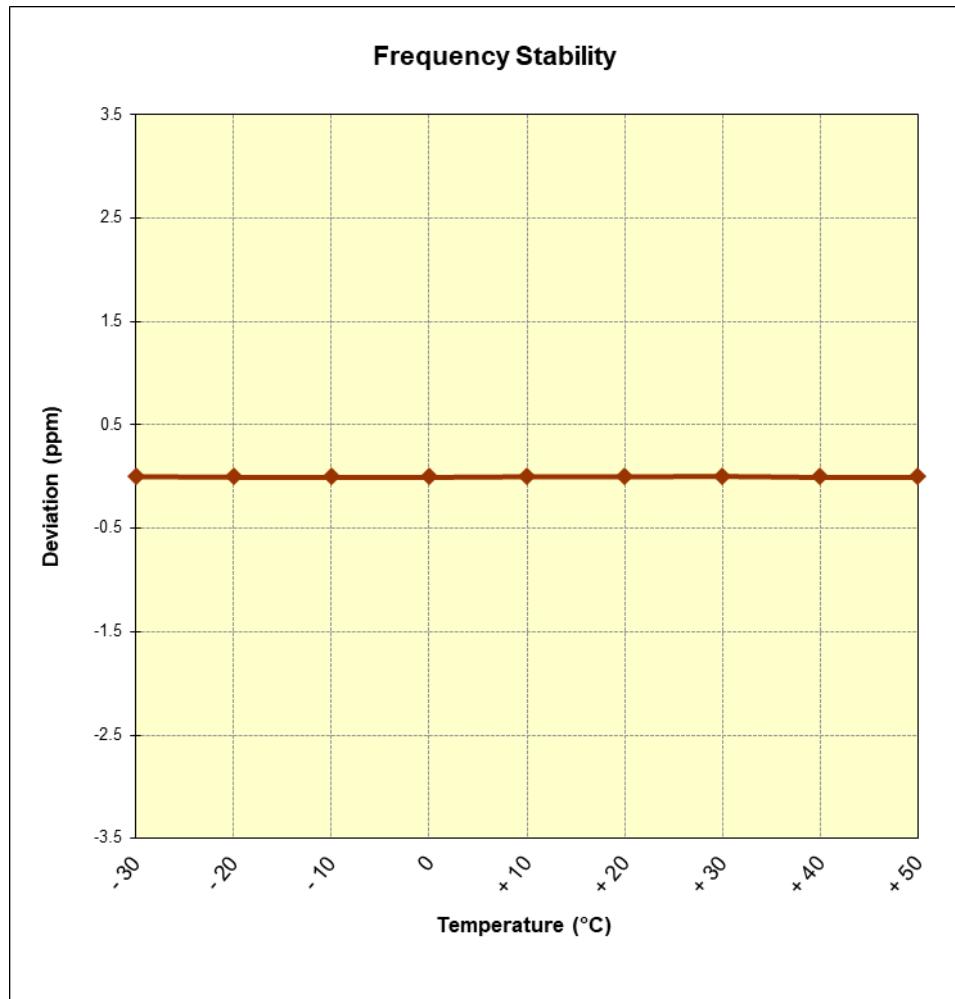


Figure 7-9. Frequency Stability Graph (Cellular GPRS Mode – Ch. 190)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 104 of 113

Frequency Stability / Temperature Variation

OPERATING FREQUENCY:	836,600,000	Hz
CHANNEL:	4183	
REFERENCE VOLTAGE:	3.80	VDC
DEVIATION LIMIT:	± 0.00025 % or 2.5 ppm	

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	836,600,005	5	0.0000006
100 %		- 20	836,600,004	4	0.0000005
100 %		- 10	836,600,004	4	0.0000005
100 %		0	836,600,004	4	0.0000005
100 %		+ 10	836,600,005	5	0.0000006
100 %		+ 20	836,600,005	5	0.0000006
100 %		+ 30	836,600,006	6	0.0000007
100 %		+ 40	836,600,004	4	0.0000005
100 %		+ 50	836,600,004	4	0.0000005
BATT. ENDPOINT		+ 20	836,600,006	6	0.0000007

Table 7-69. Frequency Stability Data (Cellular WCDMA Mode – Ch. 4183)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 105 of 113

Frequency Stability / Temperature Variation

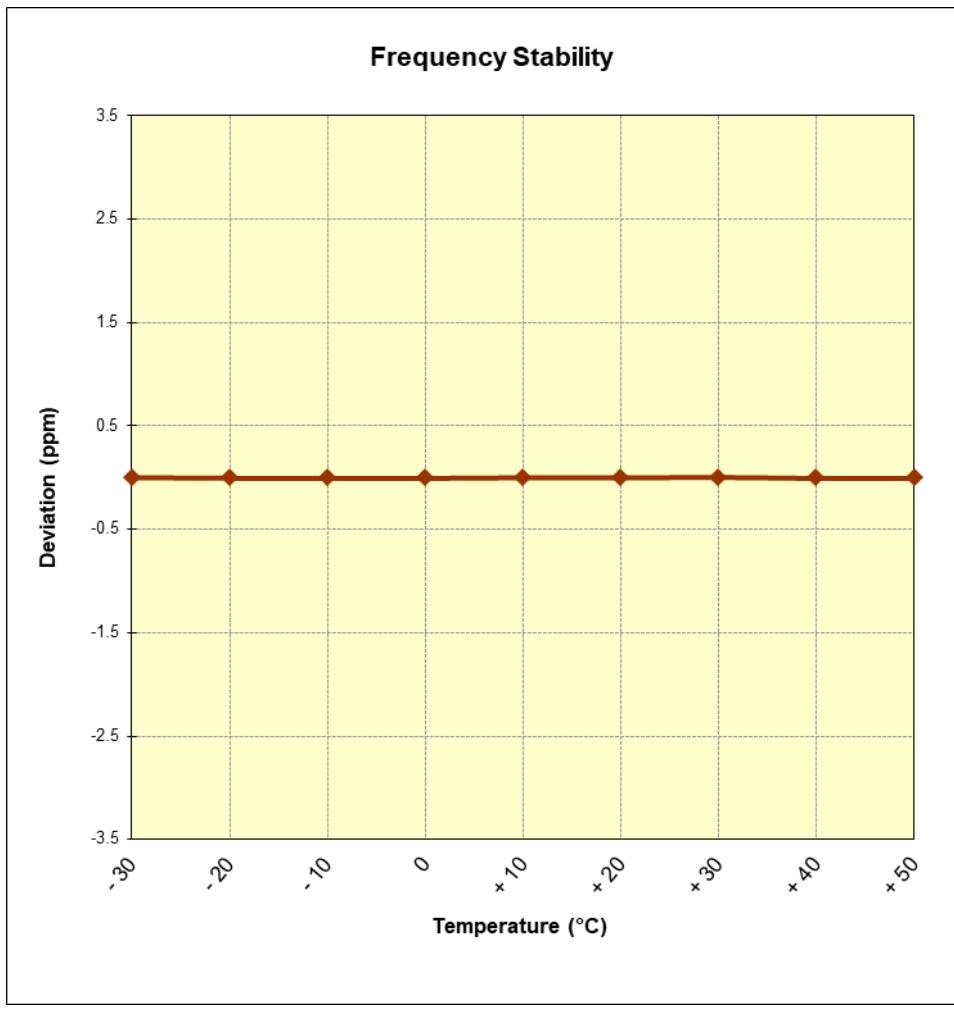


Figure 7-10. Frequency Stability Graph (Cellular WCDMA Mode – Ch. 4183)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 106 of 113

Frequency Stability / Temperature Variation

OPERATING FREQUENCY:	1,732,600,000	Hz
CHANNEL:	1413	
REFERENCE VOLTAGE:	3.80	VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	1,732,600,008	8	0.0000004
100 %		- 20	1,732,600,007	7	0.0000004
100 %		- 10	1,732,600,007	7	0.0000004
100 %		0	1,732,600,008	8	0.0000005
100 %		+ 10	1,732,600,008	8	0.0000005
100 %		+ 20	1,732,600,006	6	0.0000004
100 %		+ 30	1,732,600,006	6	0.0000004
100 %		+ 40	1,732,600,008	8	0.0000005
100 %		+ 50	1,732,600,009	9	0.0000005
BATT. ENDPOINT		+ 20	1,732,600,003	3	0.0000002

Table 7-70. Frequency Stability Data (AWS WCDMA Mode – Ch. 1413)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 107 of 113

Frequency Stability / Temperature Variation

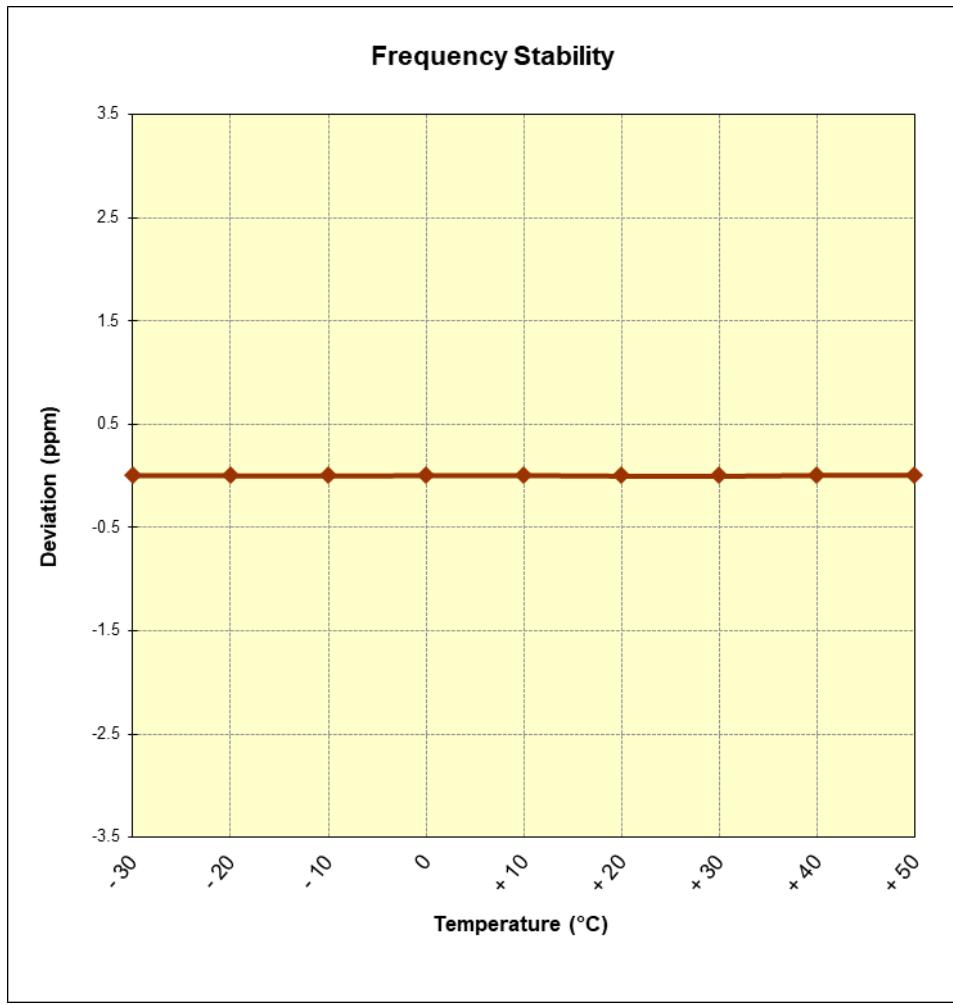


Figure 7-11. Frequency Stability Graph (AWS WCDMA Mode – Ch. 1413)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 108 of 113

Frequency Stability / Temperature Variation

OPERATING FREQUENCY:	1,880,000,000	Hz
CHANNEL:	661	
REFERENCE VOLTAGE:	3.80	VDC
DEVIATION LIMIT:	± 0.00025 % or 2.5 ppm	

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	1,880,000,008	8	0.0000004
100 %		- 20	1,880,000,009	9	0.0000005
100 %		- 10	1,880,000,008	8	0.0000004
100 %		0	1,880,000,008	8	0.0000004
100 %		+ 10	1,880,000,007	7	0.0000004
100 %		+ 20	1,880,000,007	7	0.0000004
100 %		+ 30	1,880,000,007	7	0.0000003
100 %		+ 40	1,880,000,007	7	0.0000004
100 %		+ 50	1,880,000,008	8	0.0000004
BATT. ENDPOINT	3.20	+ 20	1,880,000,005	5	0.0000003

Table 7-71. Frequency Stability Data (PCS GPRS Mode – Ch. 661)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 109 of 113

Frequency Stability / Temperature Variation

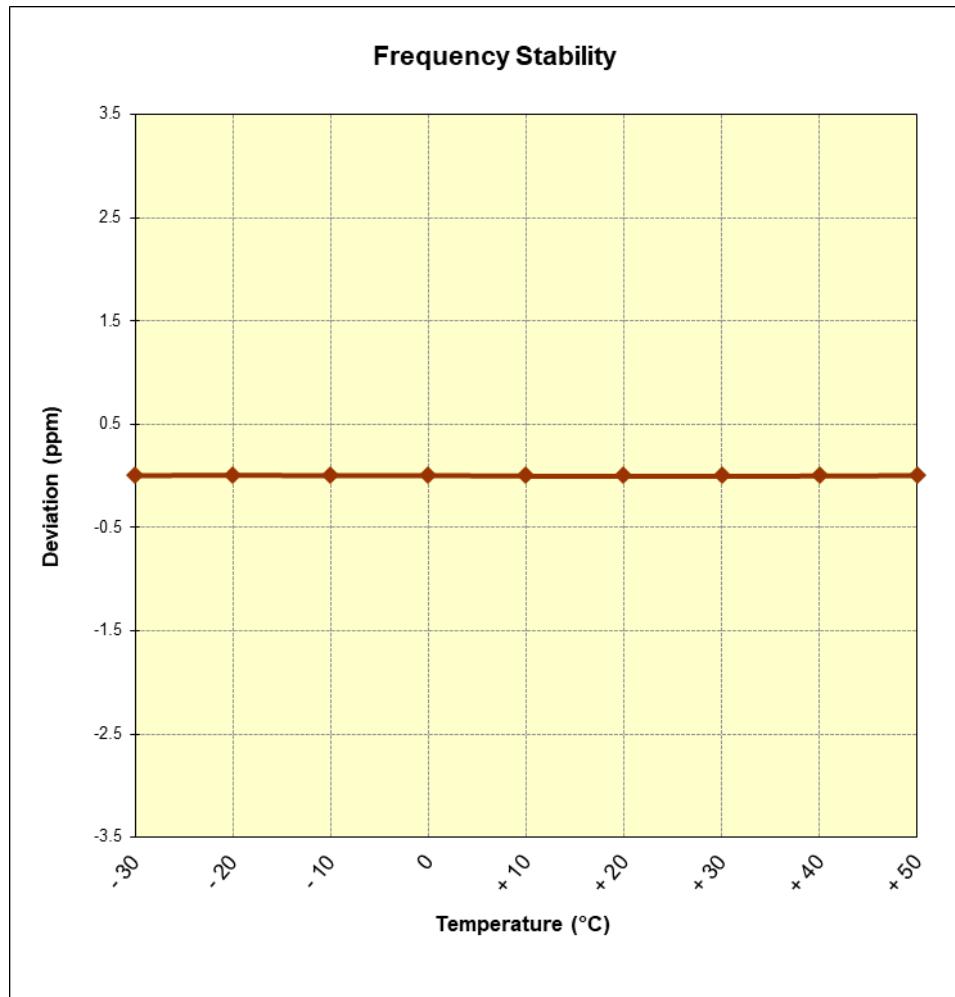


Figure 7-12. Frequency Stability Graph (PCS GPRS Mode – Ch. 661)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 110 of 113

Frequency Stability / Temperature Variation

OPERATING FREQUENCY:	1,880,000,000	Hz
CHANNEL:	9400	
REFERENCE VOLTAGE:	3.80	VDC
DEVIATION LIMIT:	± 0.00025 % or 2.5 ppm	

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	1,880,000,008	8	0.0000004
100 %		- 20	1,880,000,009	9	0.0000005
100 %		- 10	1,880,000,008	8	0.0000004
100 %		0	1,880,000,008	8	0.0000004
100 %		+ 10	1,880,000,007	7	0.0000004
100 %		+ 20	1,880,000,007	7	0.0000004
100 %		+ 30	1,880,000,007	7	0.0000003
100 %		+ 40	1,880,000,007	7	0.0000004
100 %		+ 50	1,880,000,008	8	0.0000004
BATT. ENDPOINT	3.20	+ 20	1,880,000,005	5	0.0000003

Table 7-72. Frequency Stability Data (PCS WCDMA Mode – Ch. 9400)

FCC ID: BCGA2068		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 111 of 113

Frequency Stability / Temperature Variation

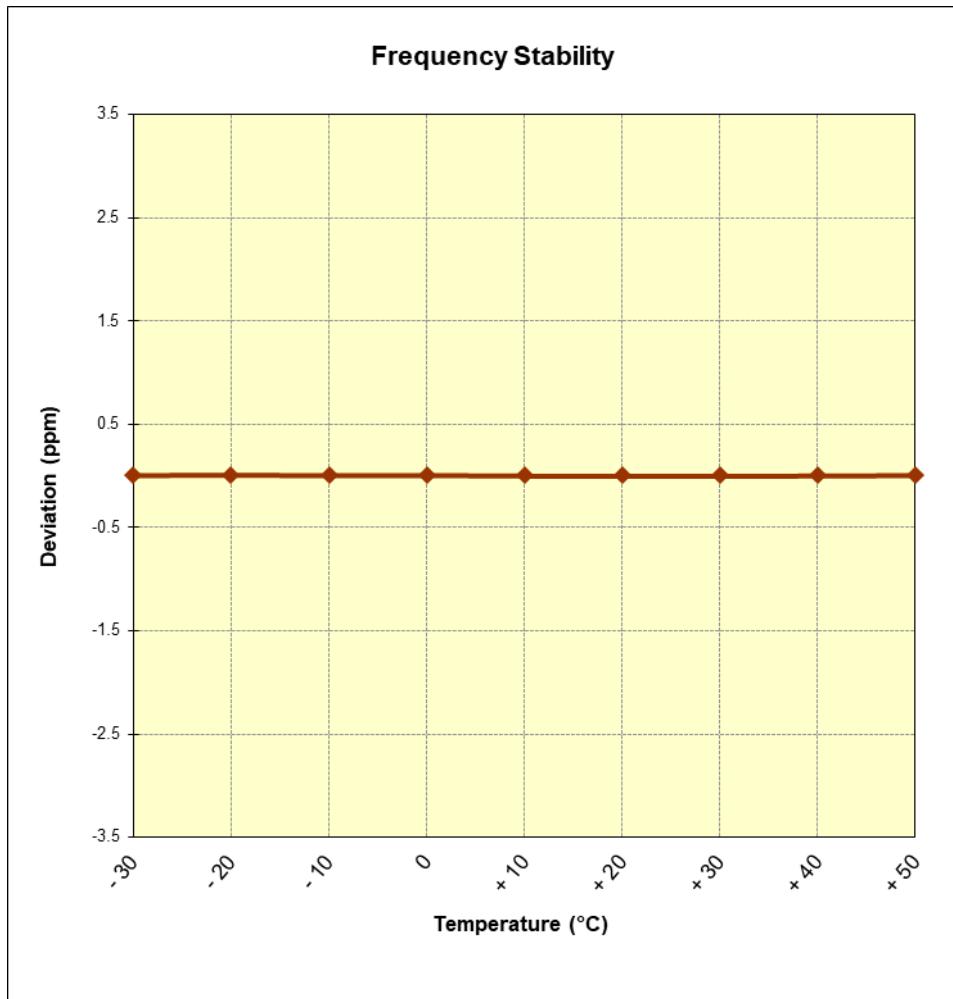


Figure 7-13. Frequency Stability Graph (PCS WCDMA Mode – Ch. 9400)

FCC ID: BCGA2068	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 112 of 113

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA2068** complies with all the requirements of Part 22, 24, & 27 of the FCC Rules and RSS-132, RSS-133, RSS-139 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA2068	 PCTEST MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170051-02.BCG	Test Dates: 12/10/2019 - 02/11/2020	EUT Type: Tablet Device	Page 113 of 113