



Plot 7-85. Band Edge Plot ANT 1a (802.11g- Ch. 3)

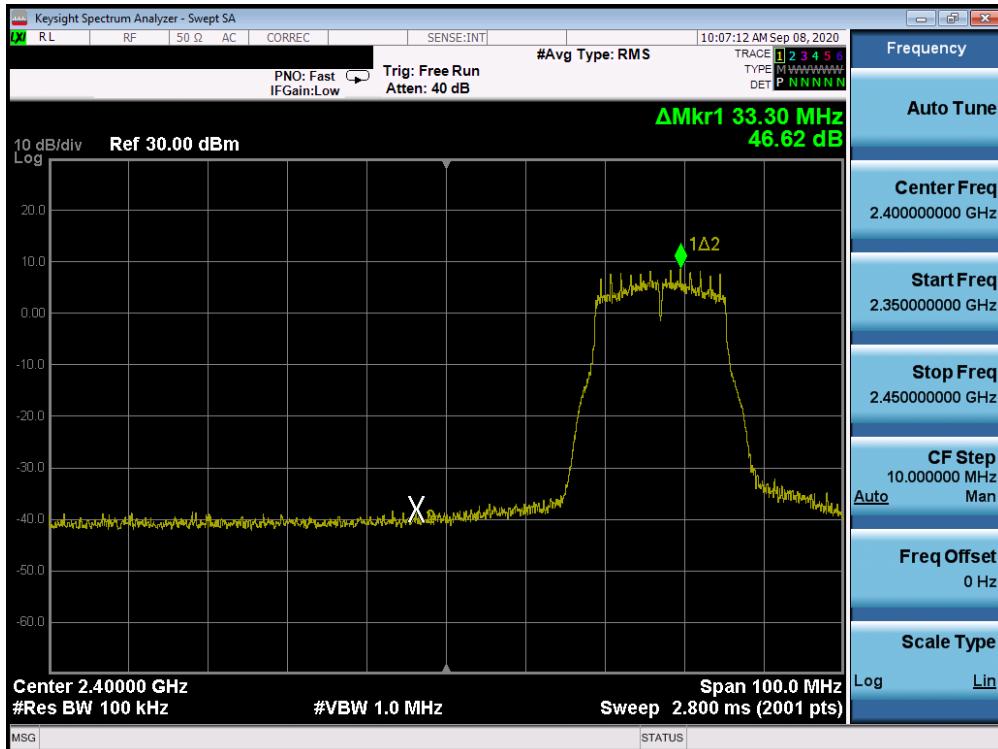


Plot 7-86. Band Edge Plot ANT 1a (802.11g- Ch. 4)

FCC ID: BCGA2072	PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device		Page 69 of 134

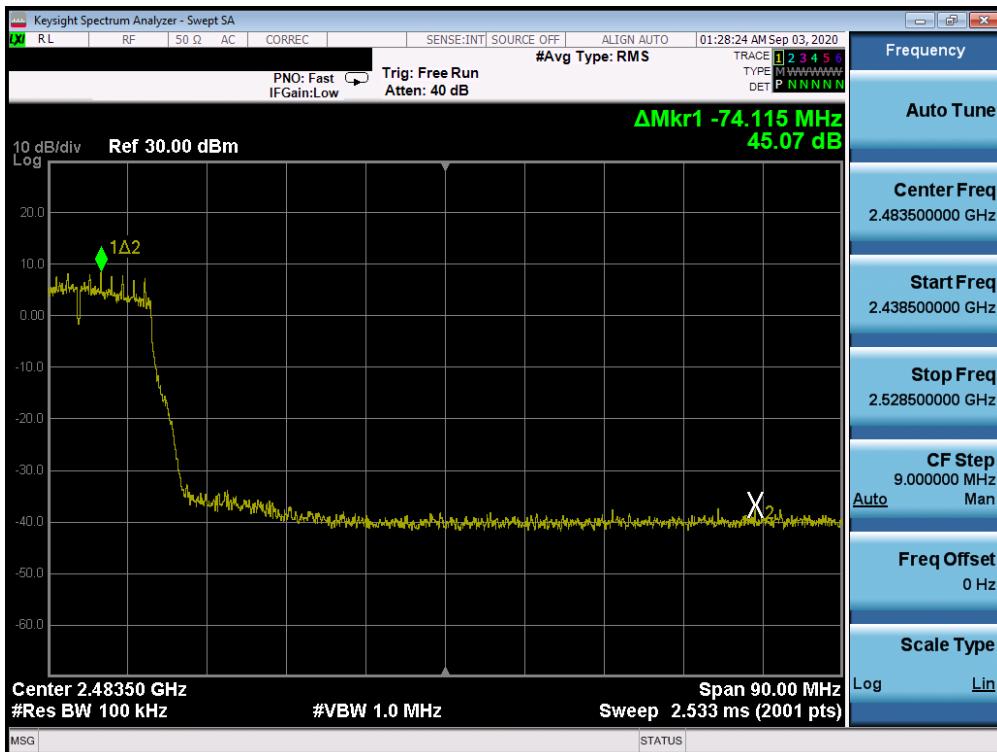


Plot 7-87. Band Edge Plot ANT 1a (802.11g – Ch. 7)

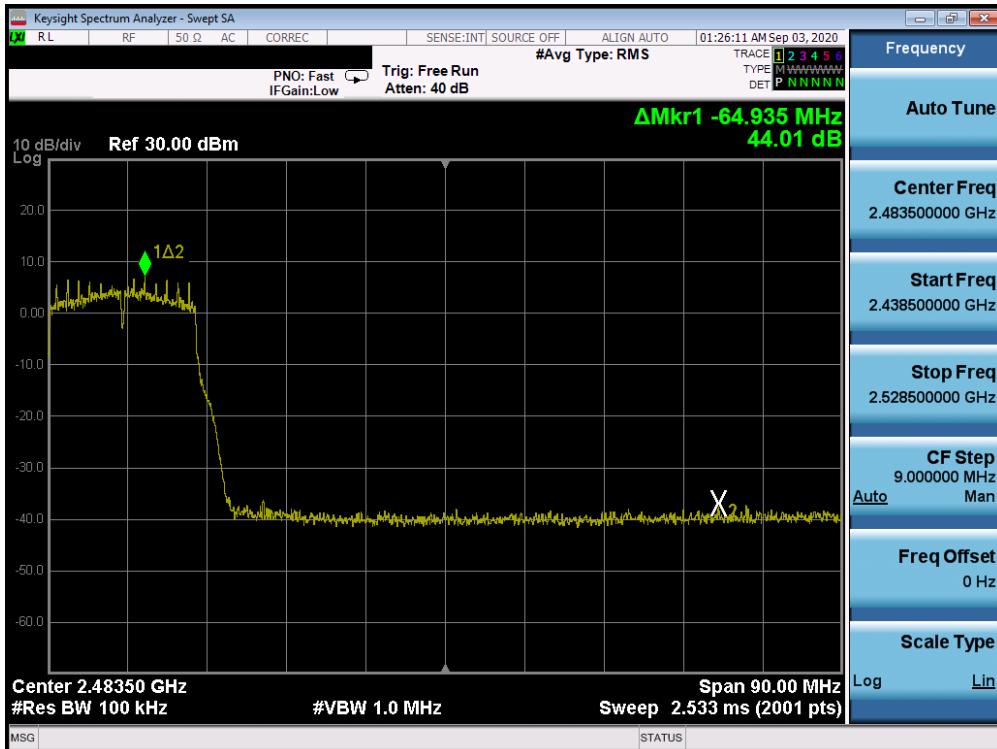


Plot 7-88. Band Edge Plot ANT 1a (802.11g – Ch. 8)

FCC ID: BCGA2072	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device		Page 70 of 134

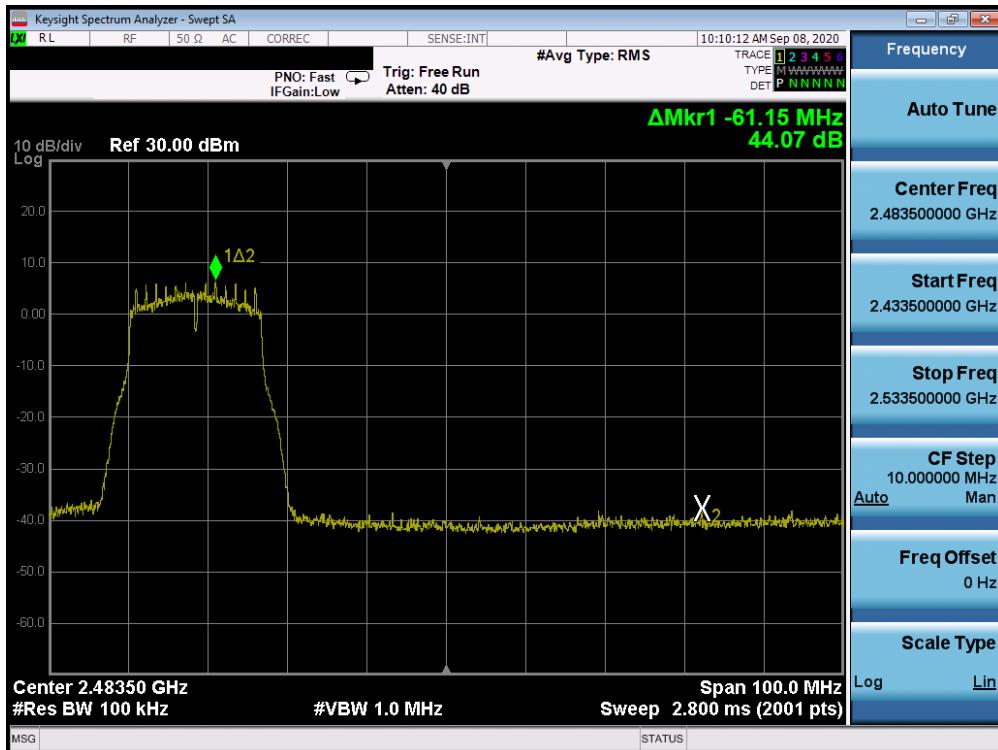


Plot 7-89. Band Edge Plot ANT 1a (802.11g – Ch. 9)

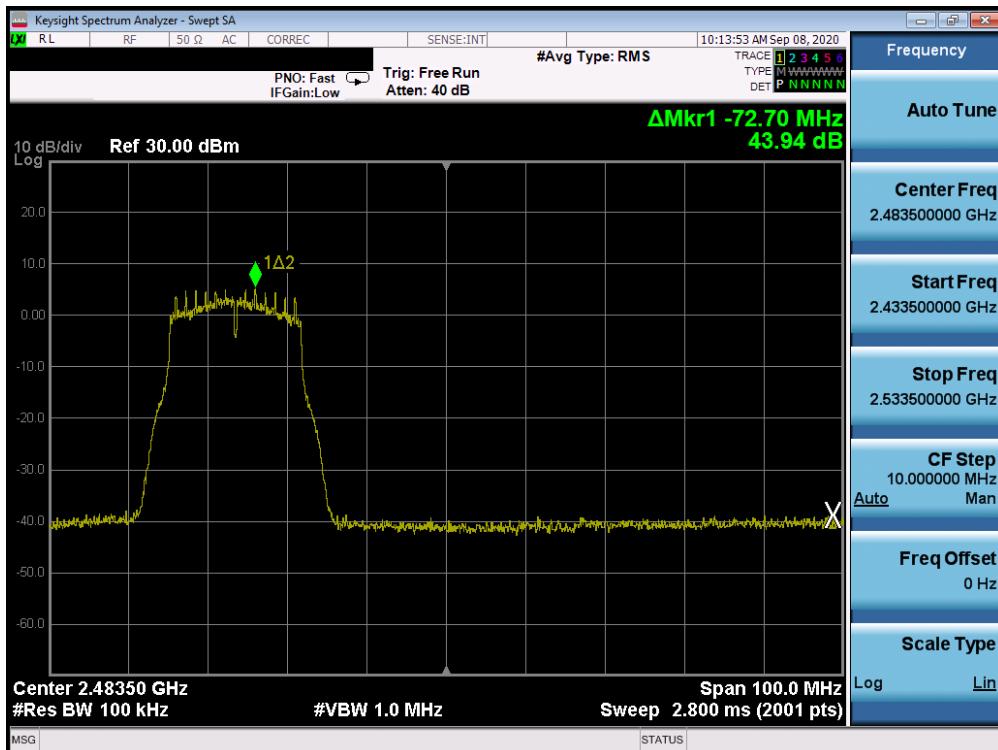


Plot 7-90. Band Edge Plot ANT 1a (802.11g – Ch. 10)

FCC ID: BCGA2072	PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device		Page 71 of 134

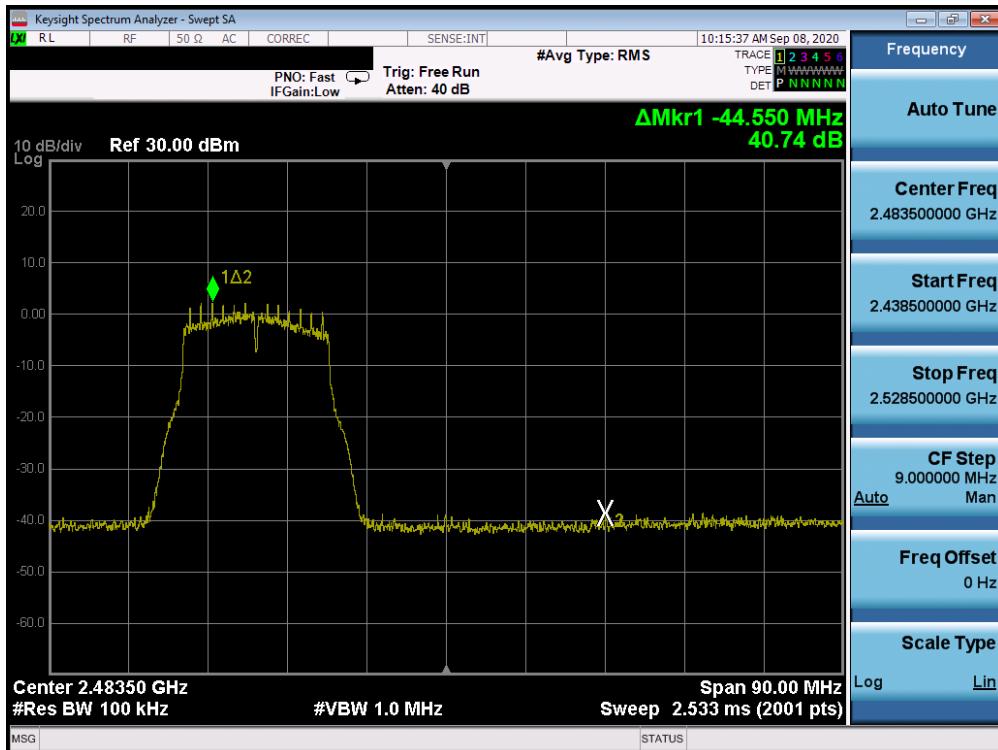


Plot 7-91. Band Edge Plot ANT 1a (802.11g – Ch. 11)

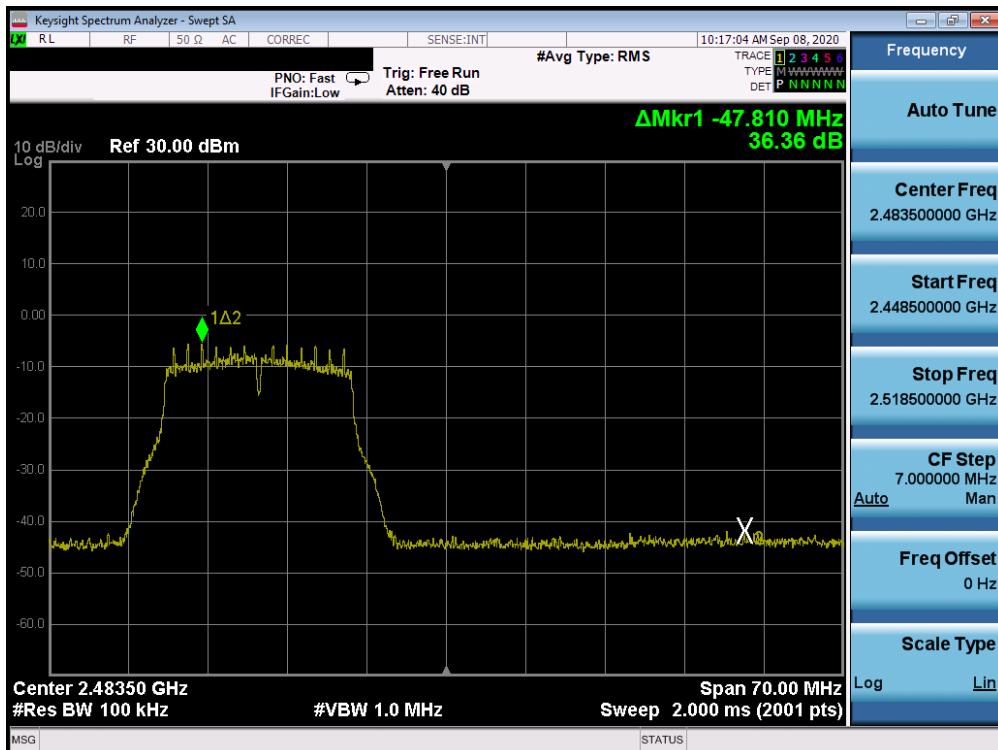


Plot 7-92. Band Edge Plot ANT 1a (802.11g – Ch. 12)

FCC ID: BCGA2072	PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device		Page 72 of 134

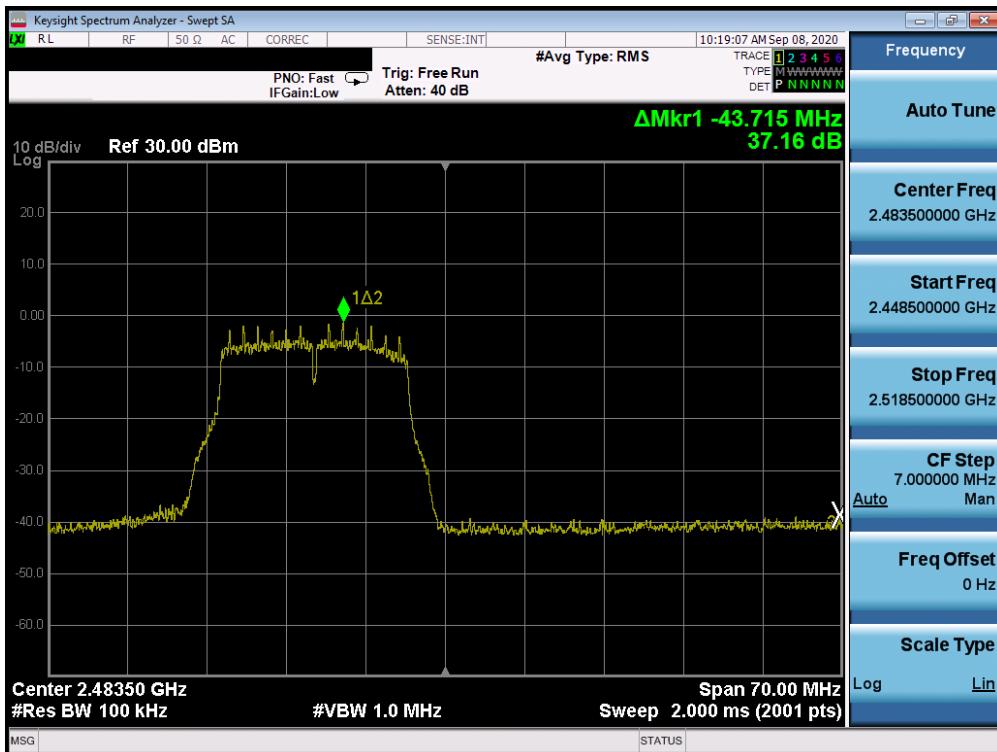


Plot 7-93. Band Edge Plot ANT 1a (802.11g – Ch. 13)

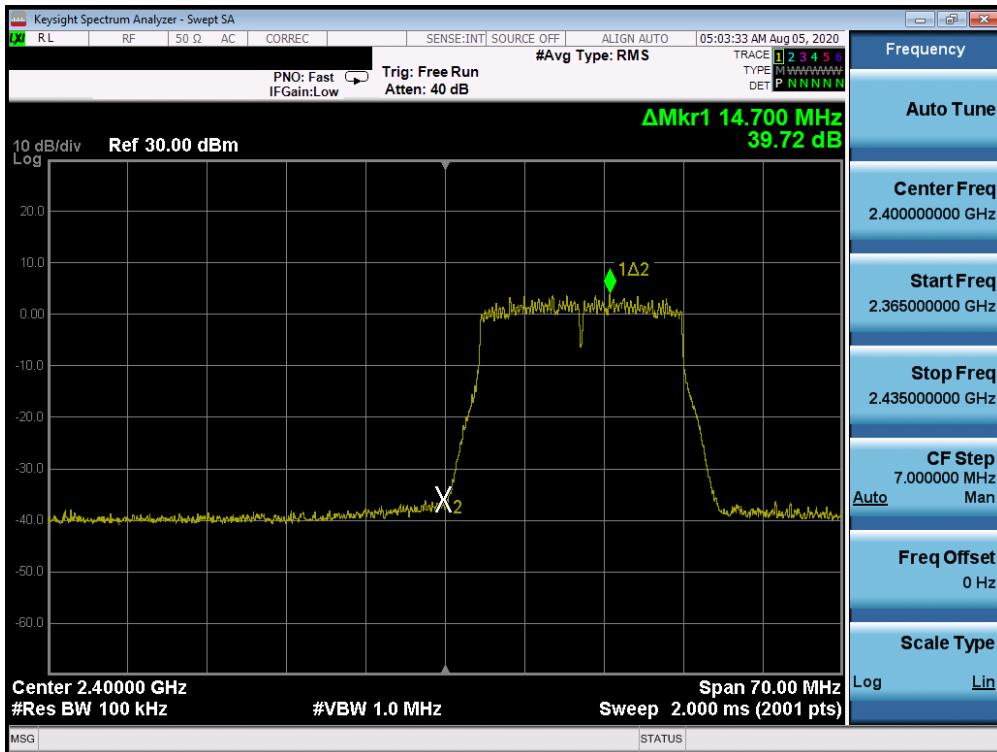


Plot 7-94. Band Edge Plot ANT 1a (802.11n (2.4GHz) – Ch. 1)

FCC ID: BCGA2072	PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device		Page 73 of 134

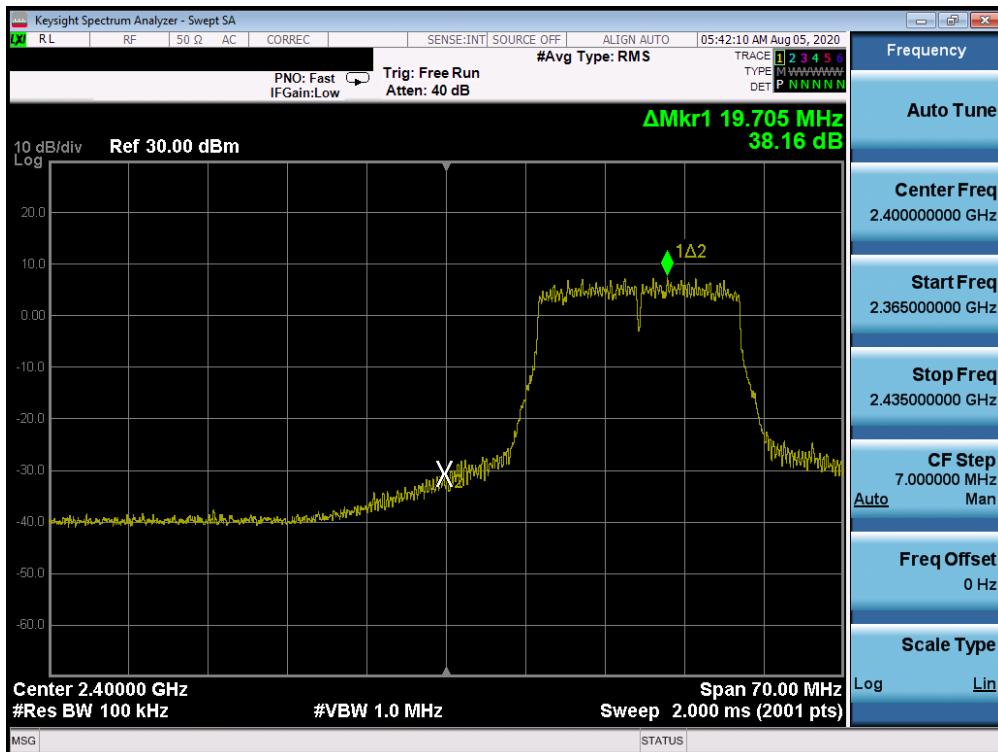


Plot 7-95. Band Edge Plot ANT 1a (802.11n (2.4GHz) – Ch. 2)

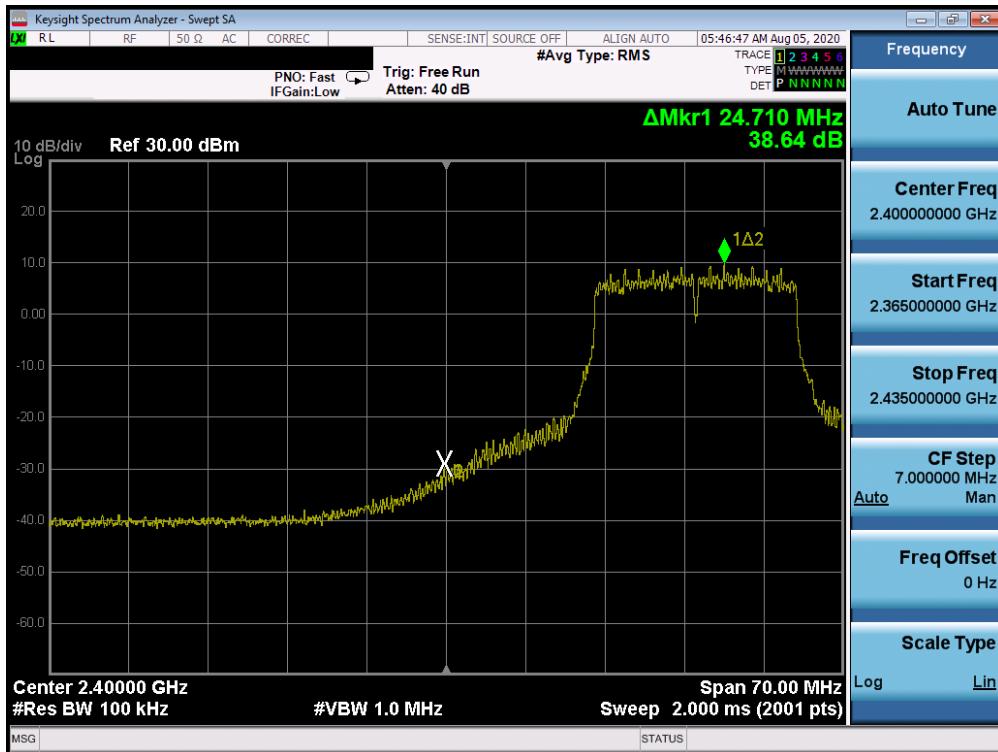


Plot 7-96. Band Edge Plot ANT 1a (802.11n (2.4GHz) – Ch. 3)

FCC ID: BCGA2072	PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device		Page 74 of 134

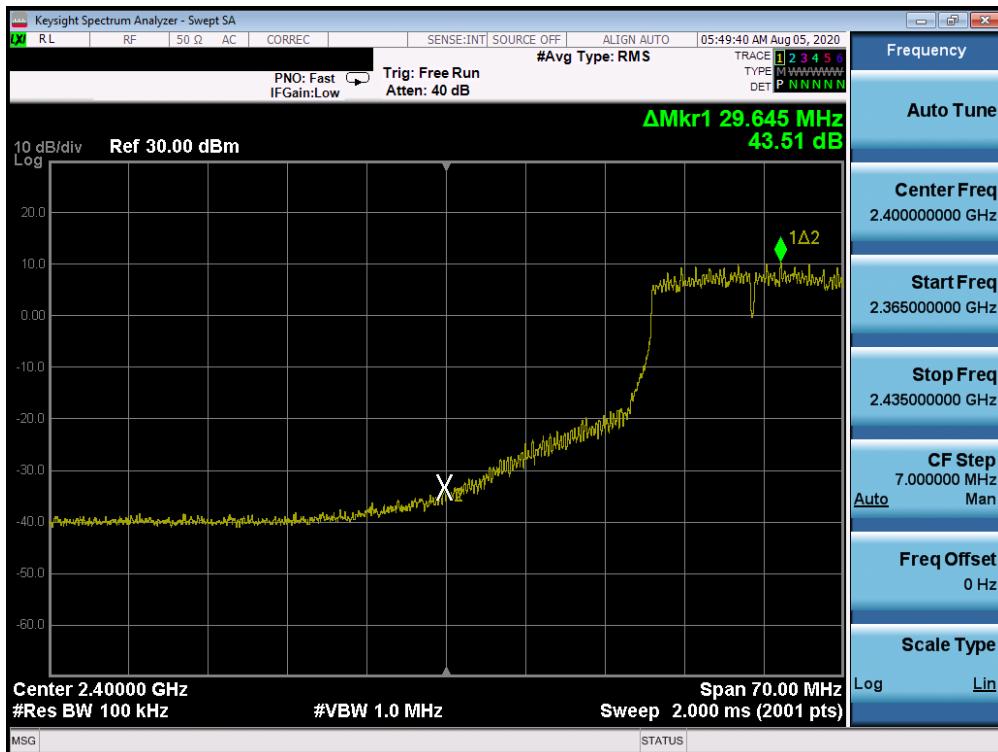


Plot 7-97. Band Edge Plot ANT 1a (802.11n (2.4GHz) – Ch. 4)

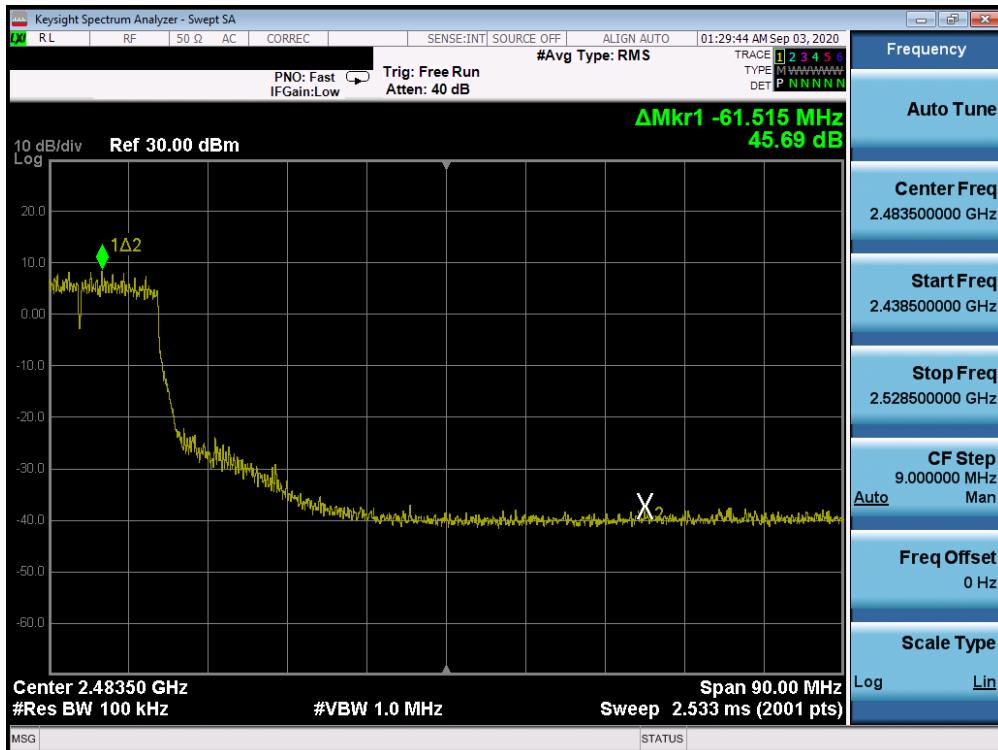


Plot 7-98. Band Edge Plot ANT 1a (802.11n (2.4GHz) – Ch. 7)

FCC ID: BCGA2072	PCTEST® Proud to be part of 			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device			

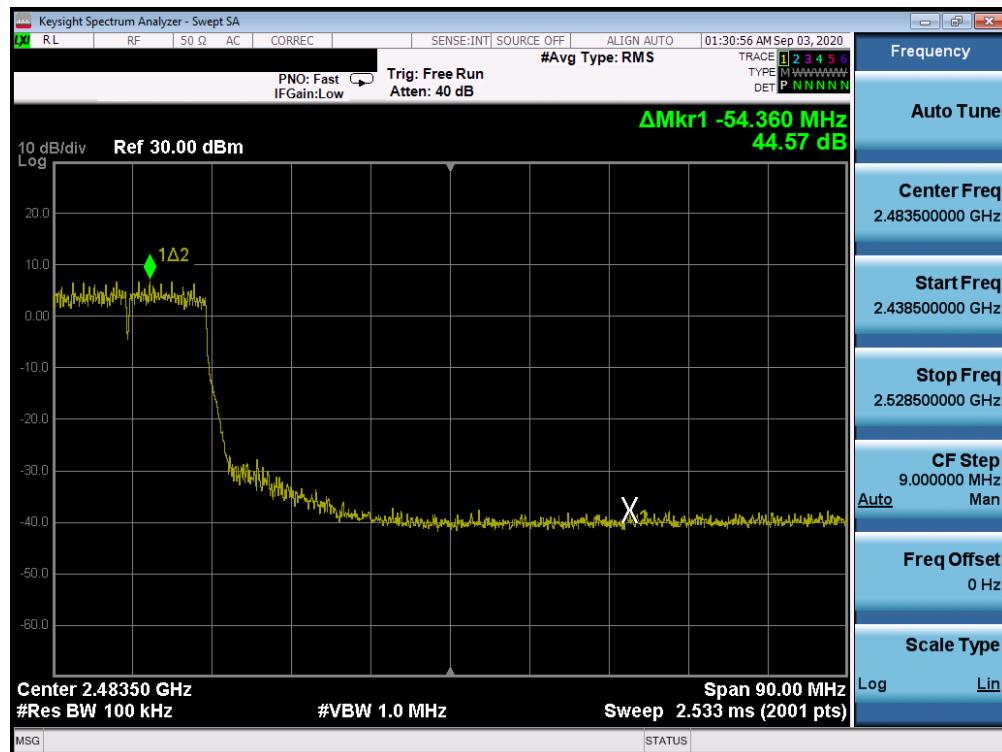


Plot 7-99. Band Edge Plot ANT 1a (802.11n (2.4GHz) – Ch. 8)

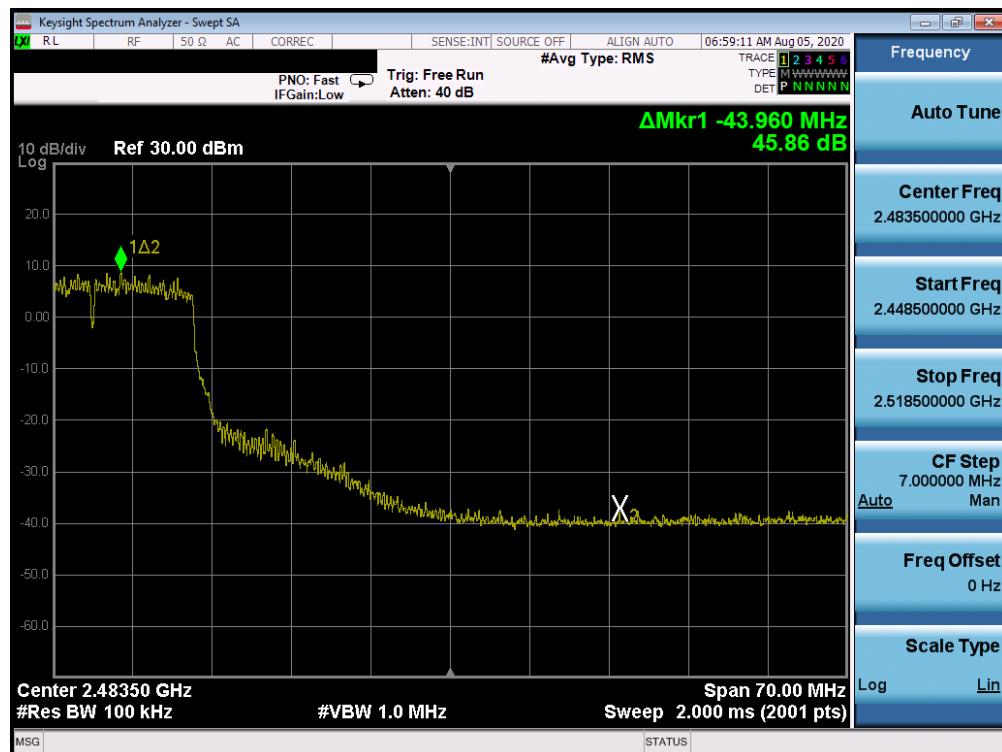


Plot 7-100. Band Edge Plot ANT 1a (802.11n (2.4GHz) – Ch. 9)

FCC ID: BCGA2072	PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device		Page 76 of 134

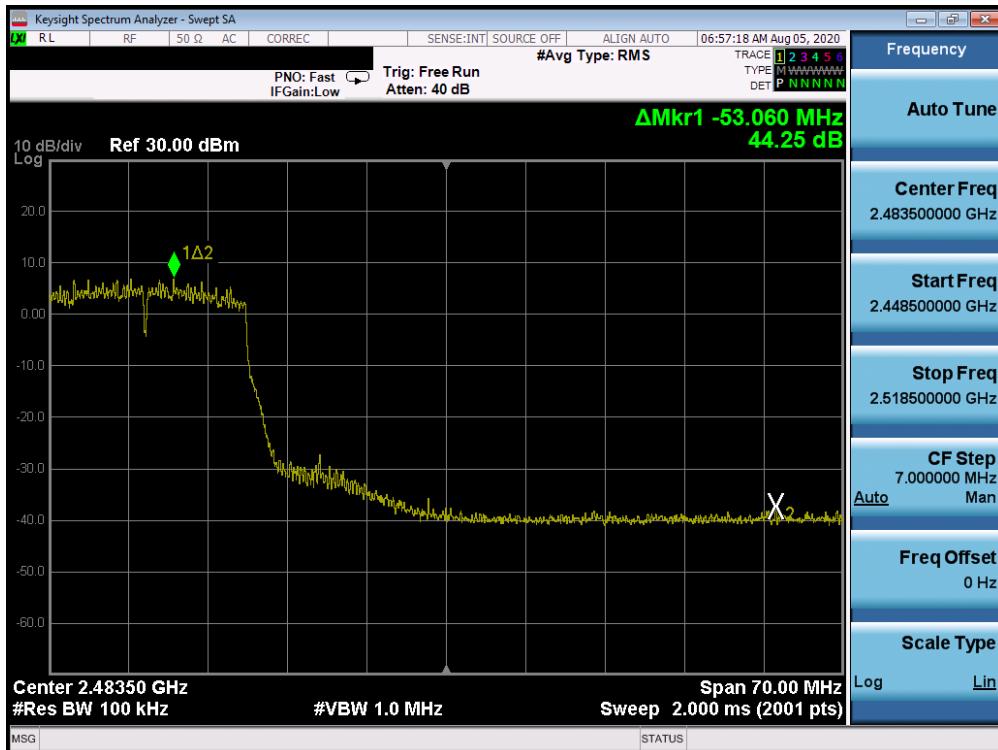


Plot 7-101. Band Edge Plot ANT 1a (802.11n (2.4GHz) – Ch. 10)

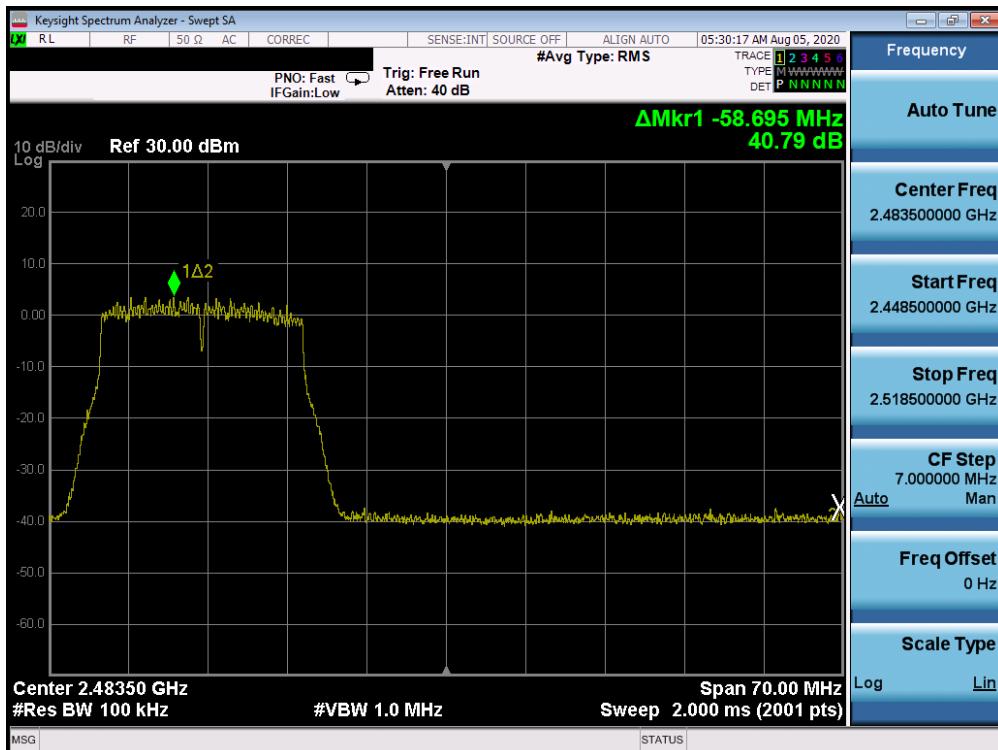


Plot 7-102. Band Edge Plot ANT 1a (802.11n (2.4GHz) – Ch. 11)

FCC ID: BCGA2072	PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device		Page 77 of 134

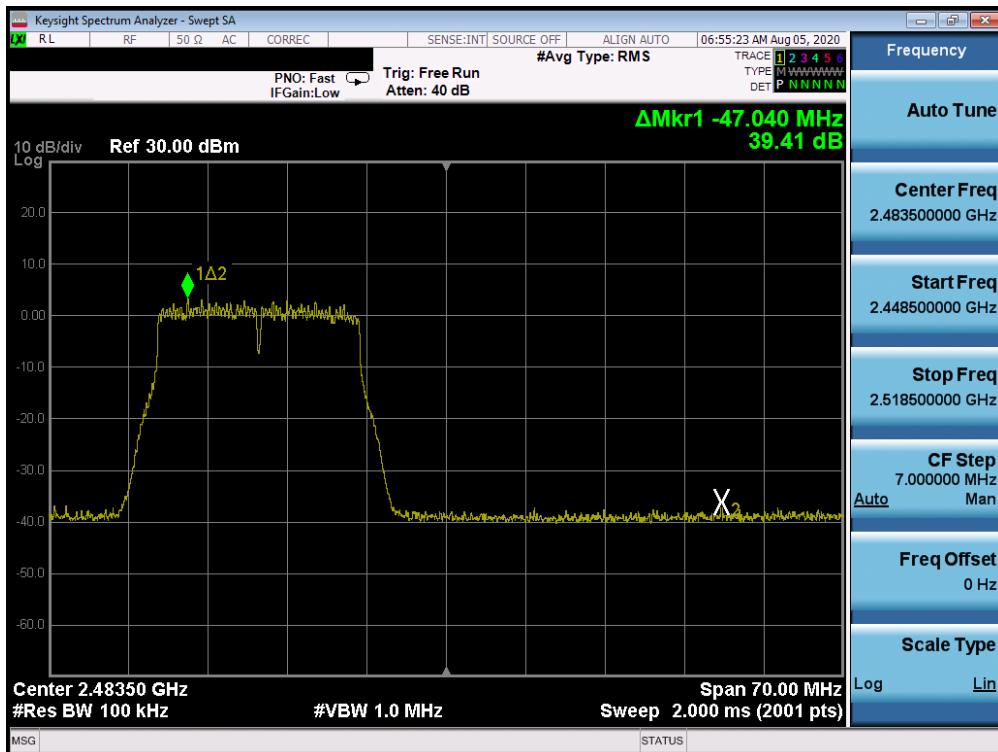

Plot 7-103. Band Edge Plot ANT 1a (802.11n (2.4GHz) – Ch. 12)

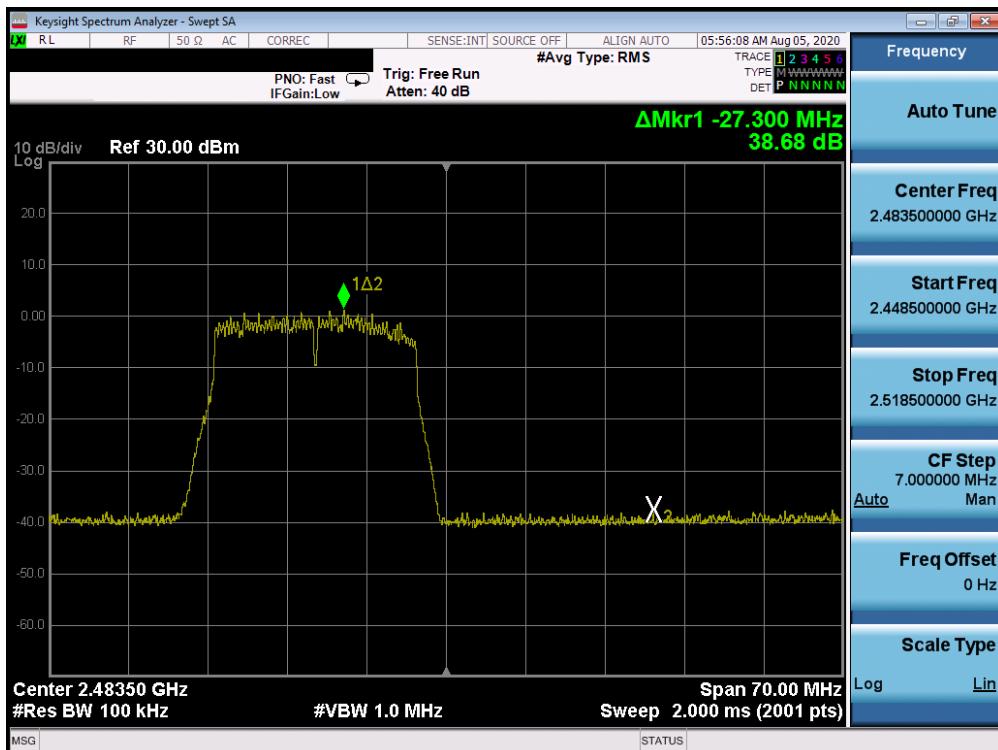

Plot 7-104. Band Edge Plot ANT 1a (802.11n (2.4GHz) – Ch. 13)

FCC ID: BCGA2072	PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device		Page 78 of 134

7.6 Conducted Spurious Emissions

§15.247(d); RSS-247 [5.5]

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. For the following out of band conducted spurious emissions plots, the EUT was investigated in all available data rates for "b", "g", "n" modes. The worst case spurious emissions for the 2.4GHz band were found while transmitting in "b" mode at 1 Mbps and are shown in the plots below.

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the procedure in Section 11.1 of ANSI C63.10-2013 and KDB 558074 D01 v05r02.

Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3
 KDB 558074 D01 v05r02 – Section 8.5
 ANSI C63.10-2013 – Section 14.3.3
 KDB 662911 D01 v02r01 – Section E(3)b)

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-5. Test Instrument & Measurement Setup


FCC ID: BCGA2072	PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device		Page 79 of 134

Test Notes

1. RBW was set to 1MHz rather than 100kHz in order to increase the measurement speed.
2. The display line shown in the following plots denotes the limit at 20dB below the fundamental emission level measured in a 100kHz bandwidth. However, since the traces in the following plots are measured with a 1MHz RBW, the display line may not necessarily appear to be 20dB below the level of the fundamental in a 1MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present.
4. The conducted spurious emissions were measured to relative limits. Therefore, in accordance with ANSI C63.10-2013 and KDB 662911 D01 v02r01 Section E)3)b), it was unnecessary to show compliance through the summation of test results of the individual outputs.
5. All antenna configurations were investigated and only the worst case is reported.
6. Following data were re-used from model A2324 per Data Re-use KDB guidance defined by the FCC.

FCC ID: BCGA2072	PCTEST [®] Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device	Page 80 of 134	

Antenna 3a Conducted Spurious Emission

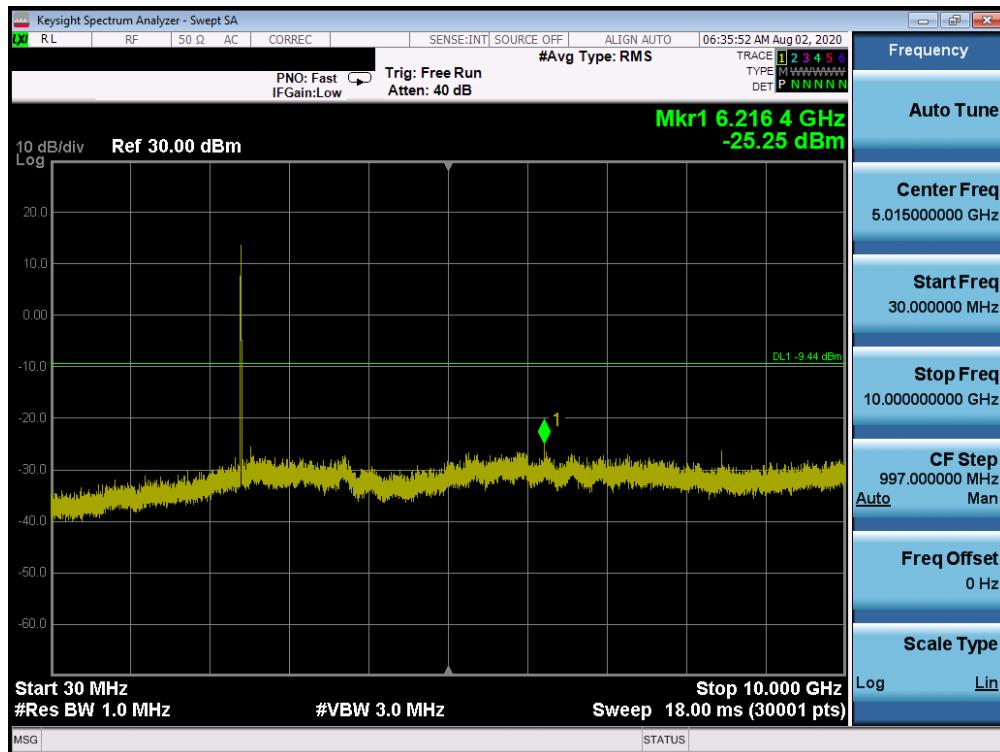


Plot 7-105. Conducted Spurious Plot ANT 3a (802.11b – Ch. 1)




Plot 7-106. Conducted Spurious Plot ANT 3a (802.11b – Ch. 1)

FCC ID: BCGA2072	PCTEST® Proud to be part of 			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device			Page 81 of 134

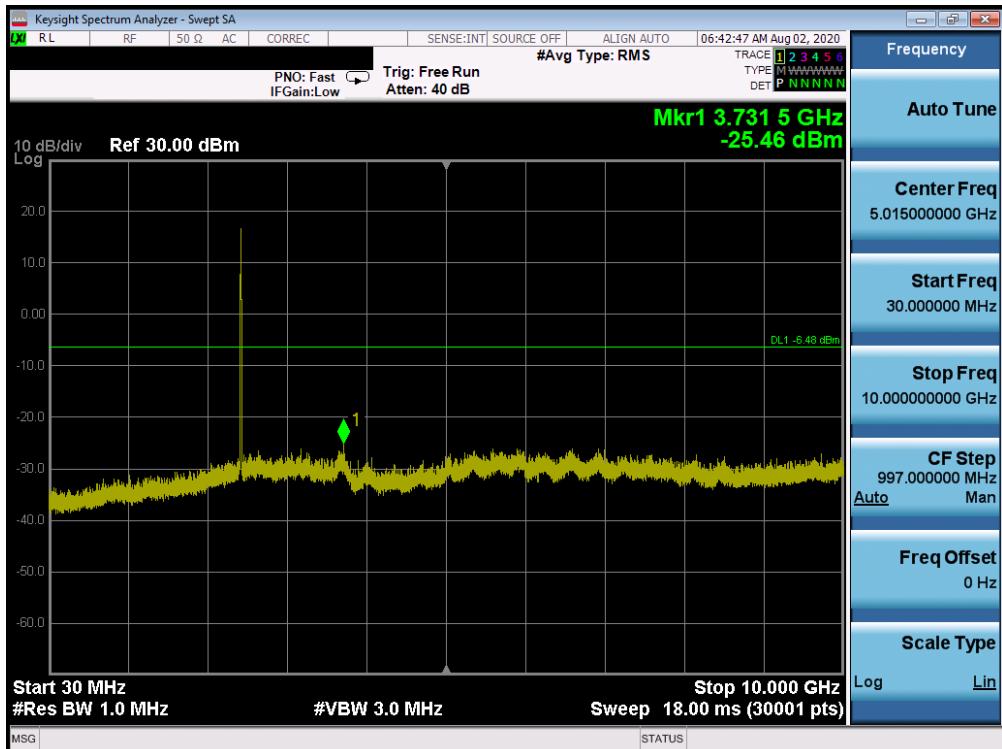


Plot 7-107. Conducted Spurious Plot ANT 3a (802.11b – Ch. 6)

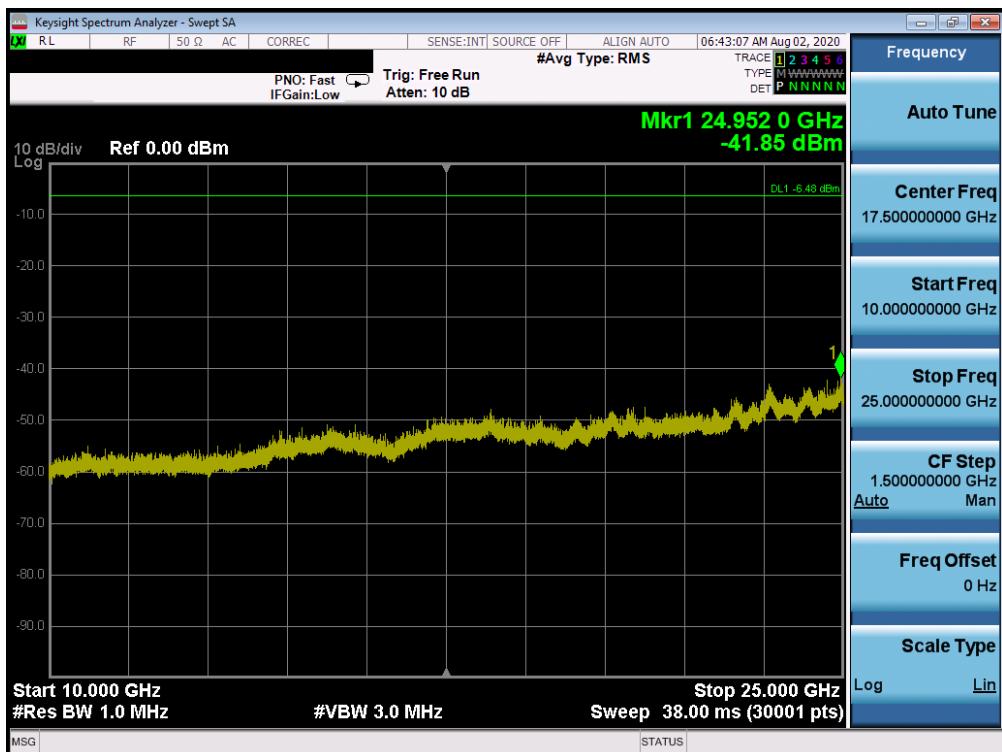


Plot 7-108. Conducted Spurious Plot ANT 3a (802.11b – Ch. 6)

FCC ID: BCGA2072	PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device		Page 82 of 134

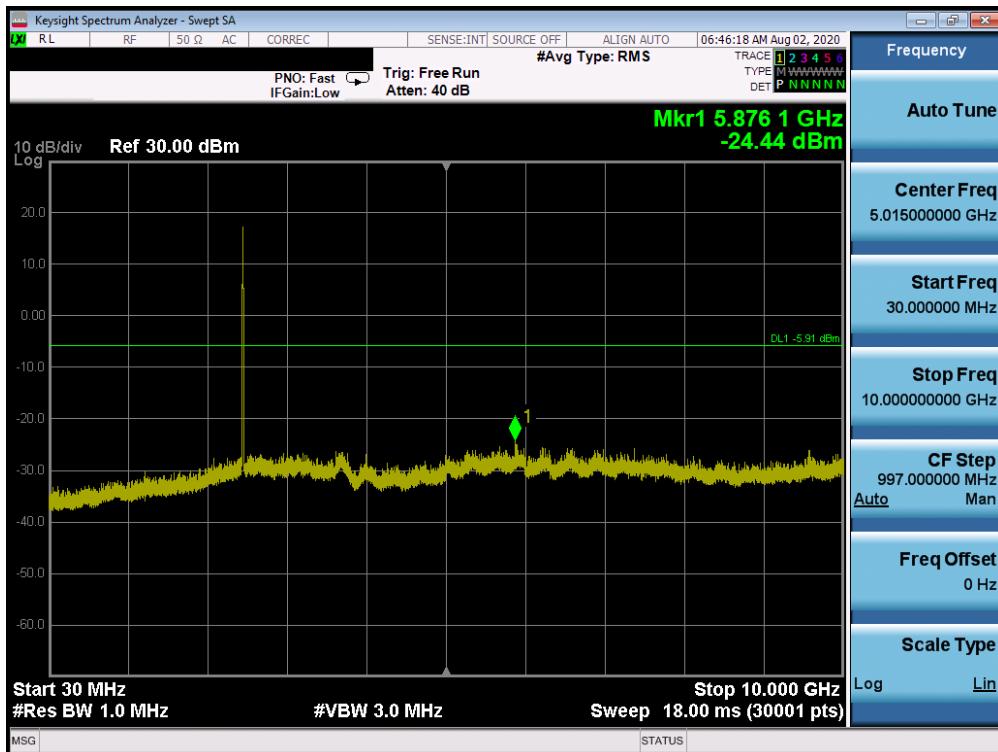


Plot 7-109. Conducted Spurious Plot ANT 3a (802.11b – Ch. 11)

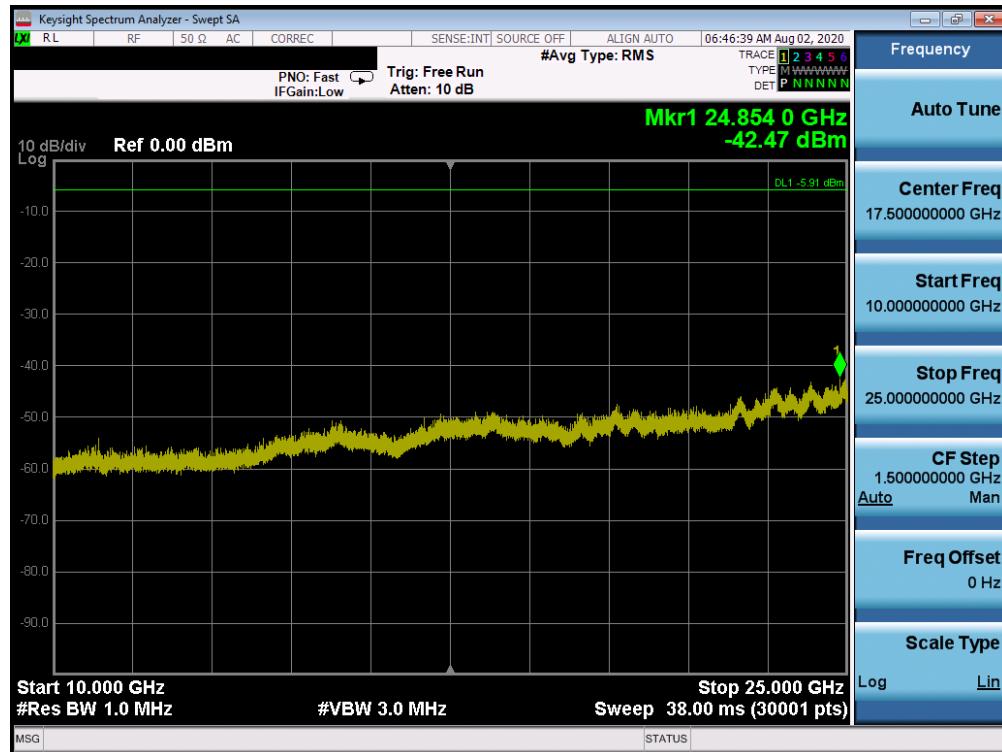


Plot 7-110. Conducted Spurious Plot ANT 3a (802.11b – Ch. 11)

FCC ID: BCGA2072	PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020		EUT Type: Tablet Device	Page 83 of 134

Antenna 1a Conducted Spurious Emissions

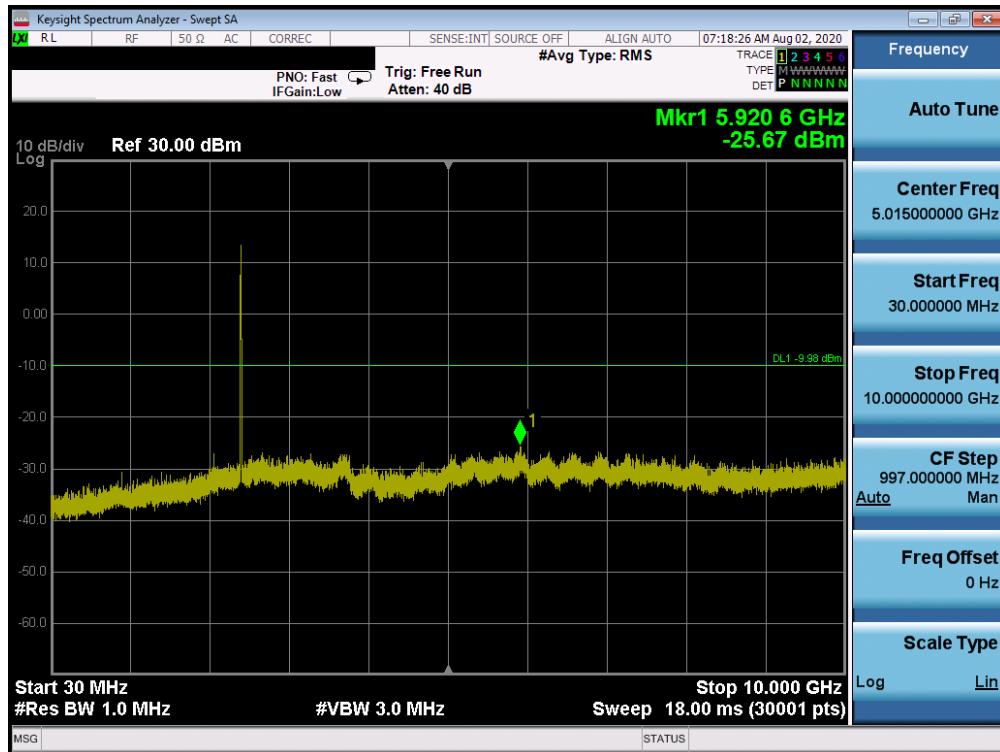


Plot 7-111. Conducted Spurious Plot ANT 1a (802.11b – Ch. 1)

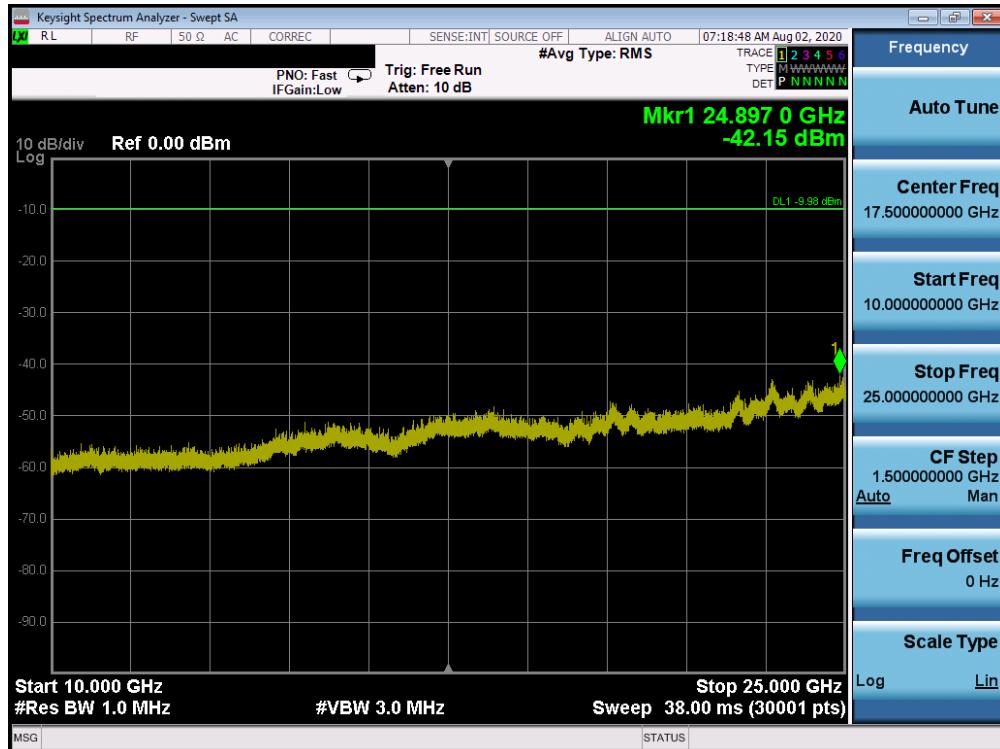


Plot 7-112. Conducted Spurious Plot ANT 1a (802.11b – Ch. 1)

FCC ID: BCGA2072	PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device		Page 84 of 134

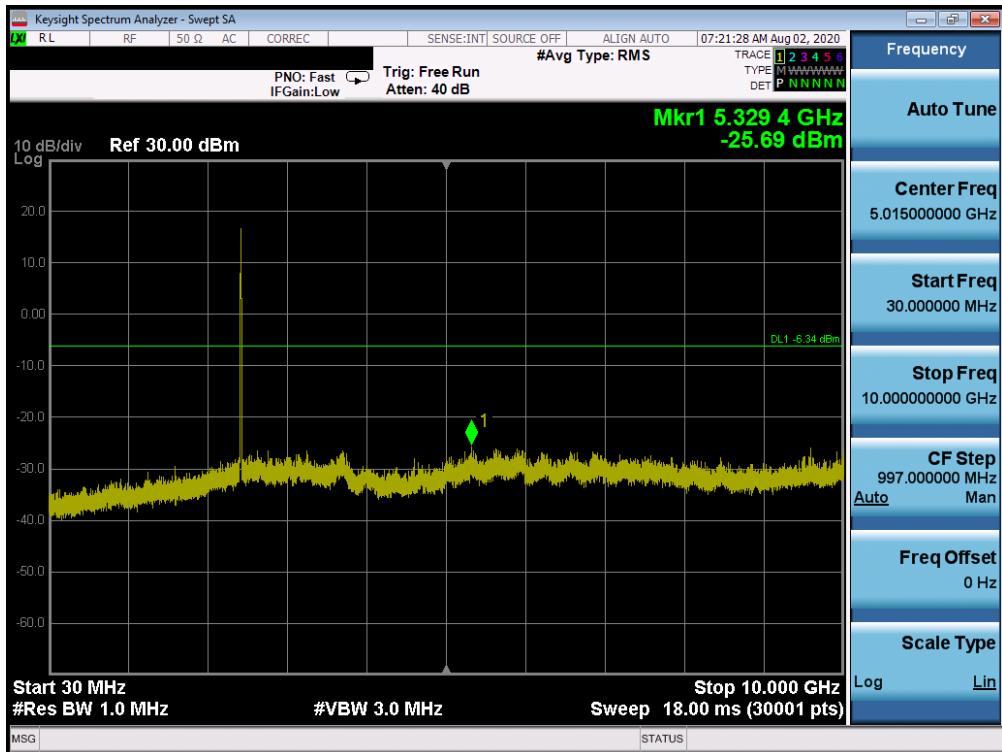


Plot 7-113. Conducted Spurious Plot ANT 1a (802.11b – Ch. 6)

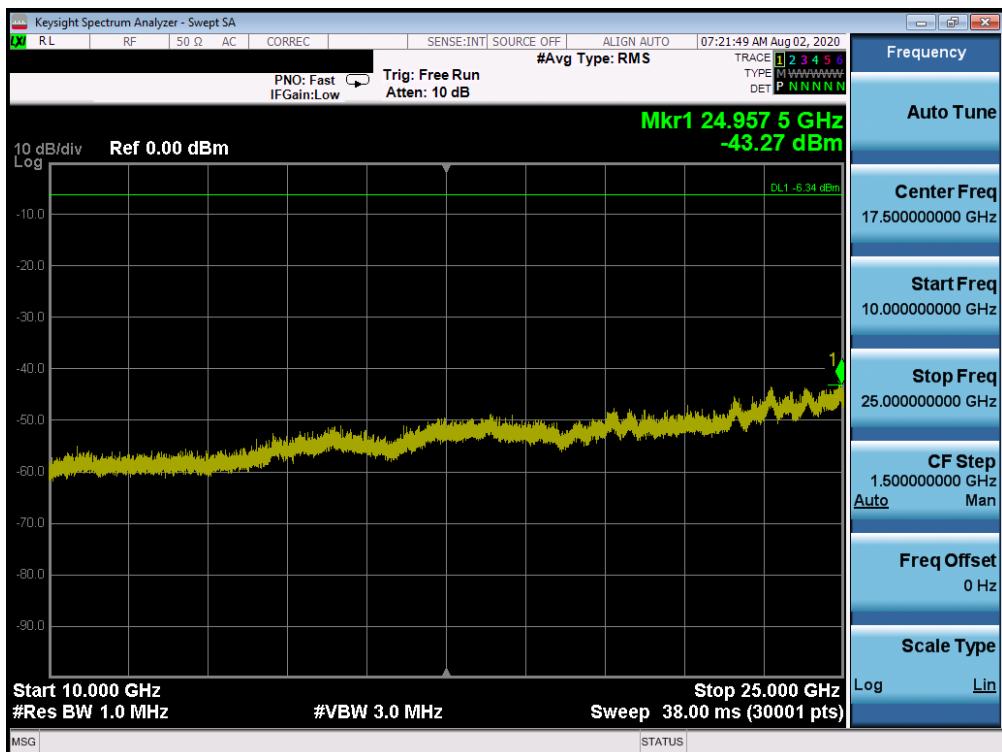


Plot 7-114. Conducted Spurious Plot ANT 1a (802.11b – Ch. 6)

FCC ID: BCGA2072	PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device		Page 85 of 134

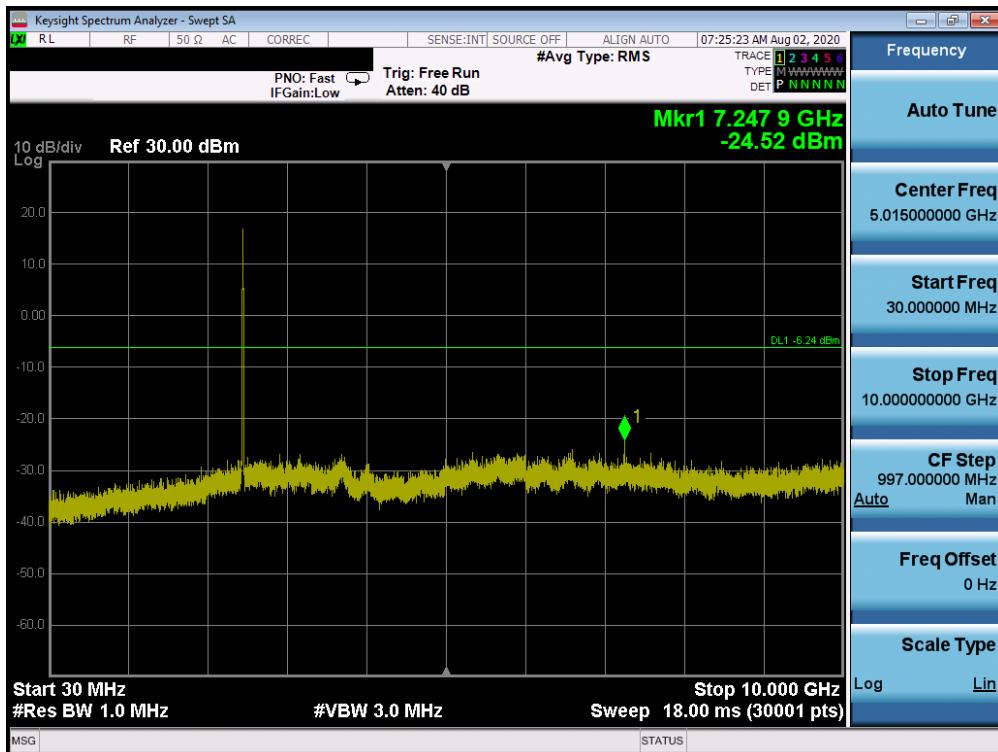

Plot 7-115. Conducted Spurious Plot ANT 1a (802.11b – Ch. 11)

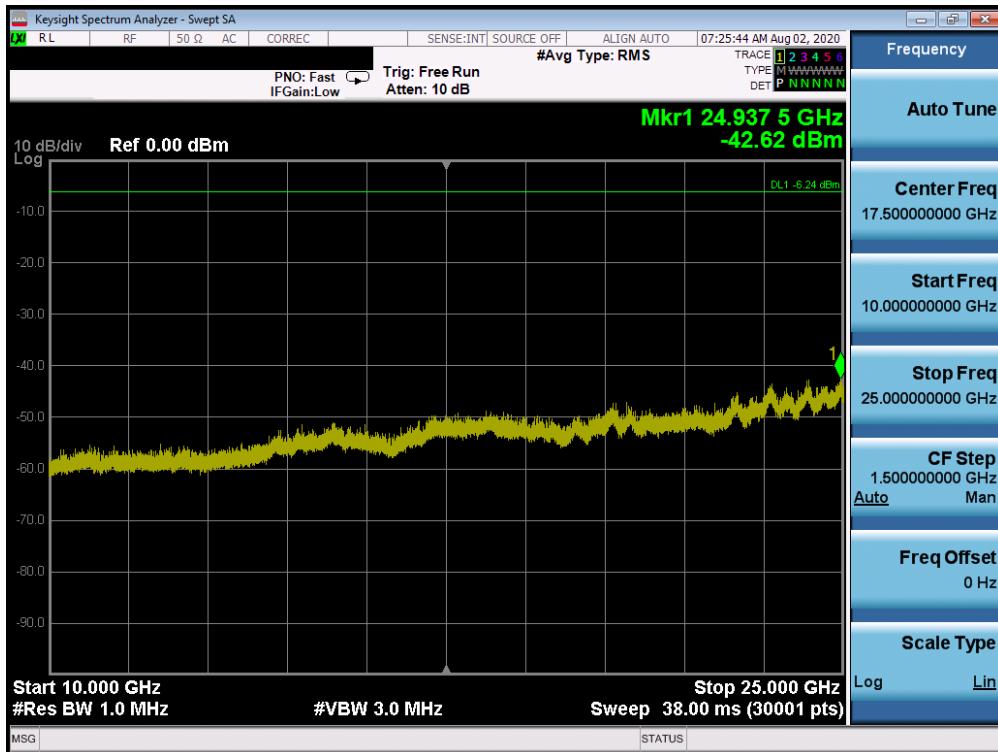

Plot 7-116. Conducted Spurious Plot ANT 1a (802.11b – Ch. 11)

FCC ID: BCGA2072	PCTEST® Proud to be part of 			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device			Page 86 of 134

7.7 Radiated Spurious Emissions – Above 1 GHz

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-15 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-15. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Section 6.6.4.3
 KDB 558074 D01 v05r02 – Sections 8.6, 8.7

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times$ span/RBW)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA2072	 PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device		Page 87 of 134

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

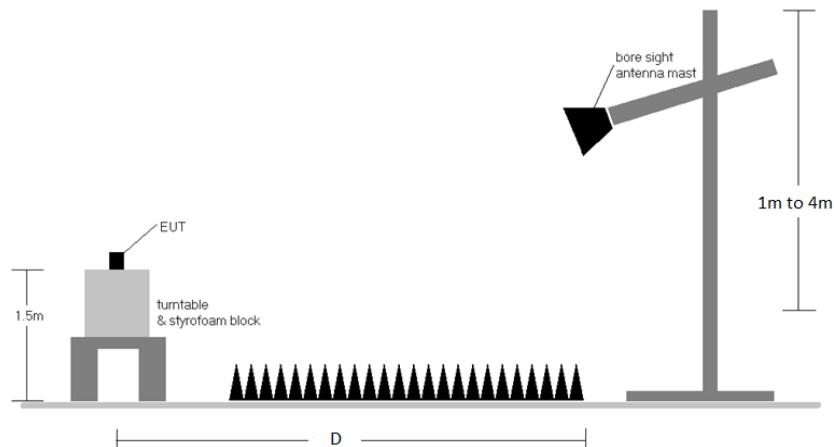


Figure 7-6. Radiated Measurement Setup

Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 558074 D01 v05r02 were not used to evaluate this device for compliance to radiated limits. All Radiated Spurious Emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in Section 15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-15.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
6. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
9. All antenna configurations were investigated and only the worst case is reported.
10. The unit was tested with all possible modes and only the highest emission is reported.
11. Spot-check testing of the following data was performed and confirmed to be within guidance per Data Re-use KDB defined by the FCC.

FCC ID: BCGA2072	 PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device		Page 88 of 134

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level [$\text{dB}_{\mu\text{V/m}}$] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] – Preamplifier Gain [dB]
- Margin [dB] = Field Strength Level [$\text{dB}_{\mu\text{V/m}}$] – Limit [$\text{dB}_{\mu\text{V/m}}$]

Radiated Band Edge Measurement Offset


- The amplitude offset shown in the radiated restricted band edge plots in Section 7.7 was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$


FCC ID: BCGA2072	 PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device	Page 89 of 134	

7.7.1 Antenna 3a Radiated Spurious Emission Measurements


§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

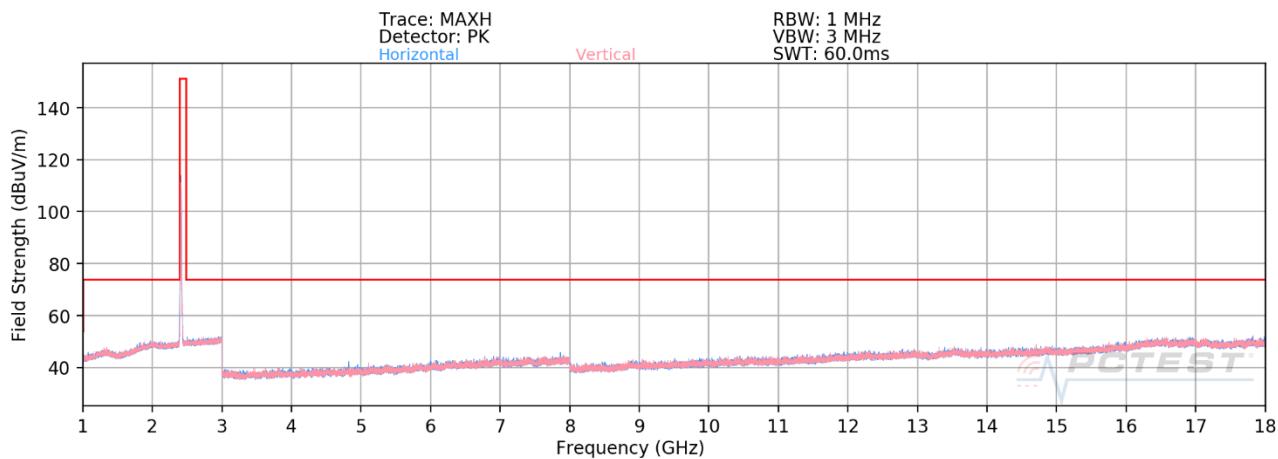

Plot 7-117. Radiated Spurious Emissions above 1GHz ANT 3a (802.11b – Ch. 1)

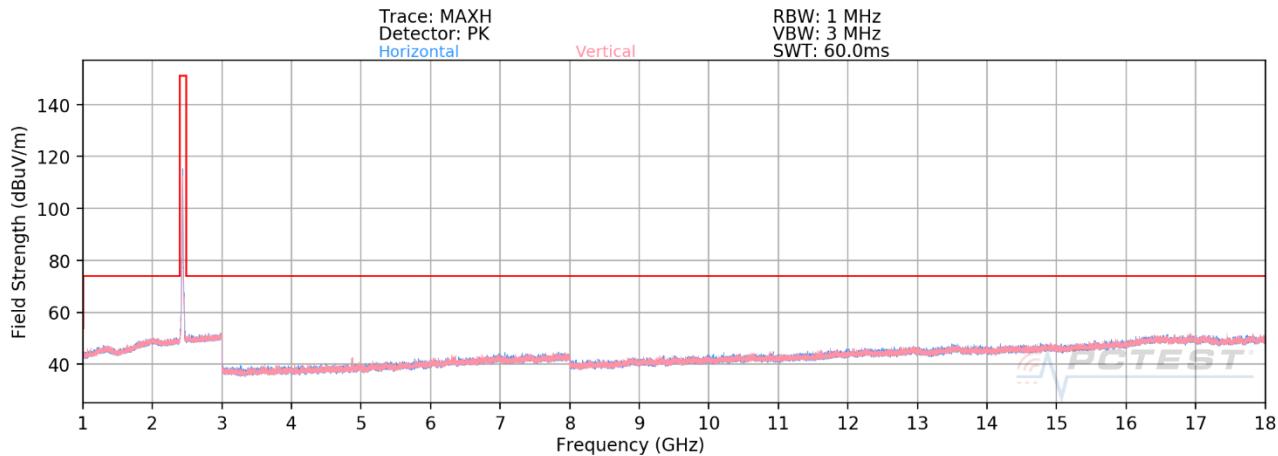

Plot 7-118. Radiated Spurious Emissions above 1GHz ANT 3a (802.11b – Ch. 6)

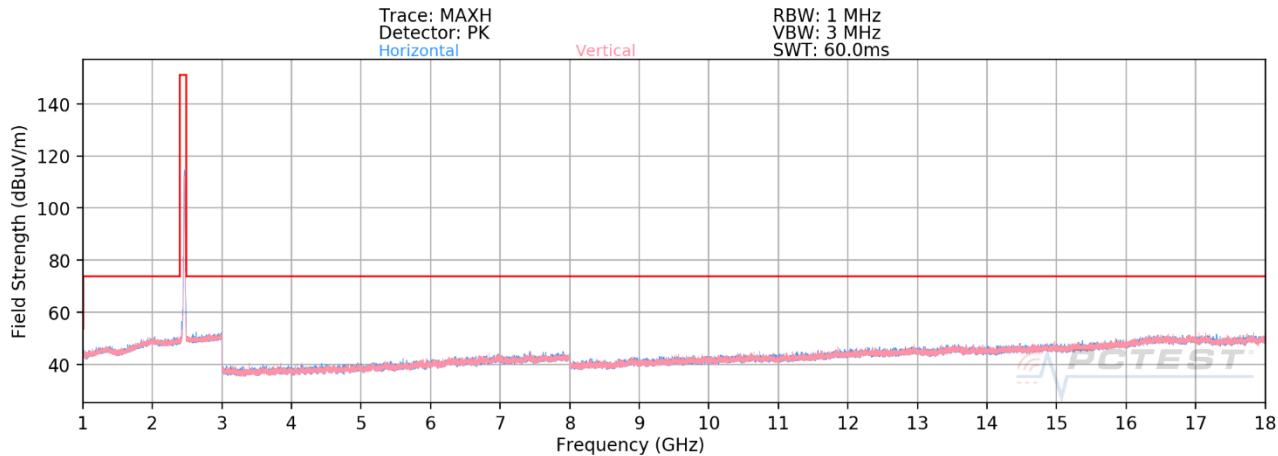

Plot 7-119. Radiated Spurious Emissions above 1GHz ANT 3a (802.11b – Ch. 11)

FCC ID: BCGA2072	PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device		Page 90 of 134

Antenna 3a Radiated Spurious Emission Measurements
§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11b
Worst Case Transfer Rate:	1Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4824.00	Avg	H	101	198	-75.61	6.08	37.47	53.98	-16.51
4824.00	Peak	H	101	198	-64.43	6.08	48.65	73.98	-25.33
12060.00	Avg	H	-	-	-85.38	15.05	36.67	53.98	-17.31
12060.00	Peak	H	-	-	-73.38	15.05	48.67	73.98	-25.31

Table 7-16. Radiated Measurements ANT 3a

Worst Case Mode:	802.11b
Worst Case Transfer Rate:	1Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	2437MHz
Channel:	06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4874.00	Avg	H	101	198	-72.30	5.96	40.66	53.98	-13.31
4874.00	Peak	H	101	198	-63.14	5.96	49.82	73.98	-24.15
7311.00	Avg	H	400	115	-82.41	9.79	34.38	53.98	-19.59
7311.00	Peak	H	400	115	-70.26	9.79	46.53	73.98	-27.44
12185.00	Avg	H	249	76	-84.84	14.93	37.09	53.98	-16.89
12185.00	Peak	H	249	76	-73.16	14.93	48.77	73.98	-25.21

Table 7-17. Radiated Measurements ANT 3a

FCC ID: BCGA2072	PCTEST® Proud to be part of 			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device			

Worst Case Mode:	802.11b
Worst Case Transfer Rate:	1Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4924.00	Avg	H	-	-	-84.28	6.65	29.37	53.98	-24.61
4924.00	Peak	H	-	-	-72.87	6.65	40.78	73.98	-33.20
7386.00	Avg	H	-	-	-82.93	9.87	33.94	53.98	-20.04
7386.00	Peak	H	-	-	-71.79	9.87	45.08	73.98	-28.90
12310.00	Avg	H	-	-	-85.40	15.38	36.98	53.98	-17.00
12310.00	Peak	H	-	-	-73.93	15.38	48.45	73.98	-25.53

Table 7-18. Radiated Measurements ANT 3a


FCC ID: BCGA2072	 PCTEST® Proud to be part of 			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device			

7.7.2 Antenna 1a Radiated Spurious Emission Measurements


§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

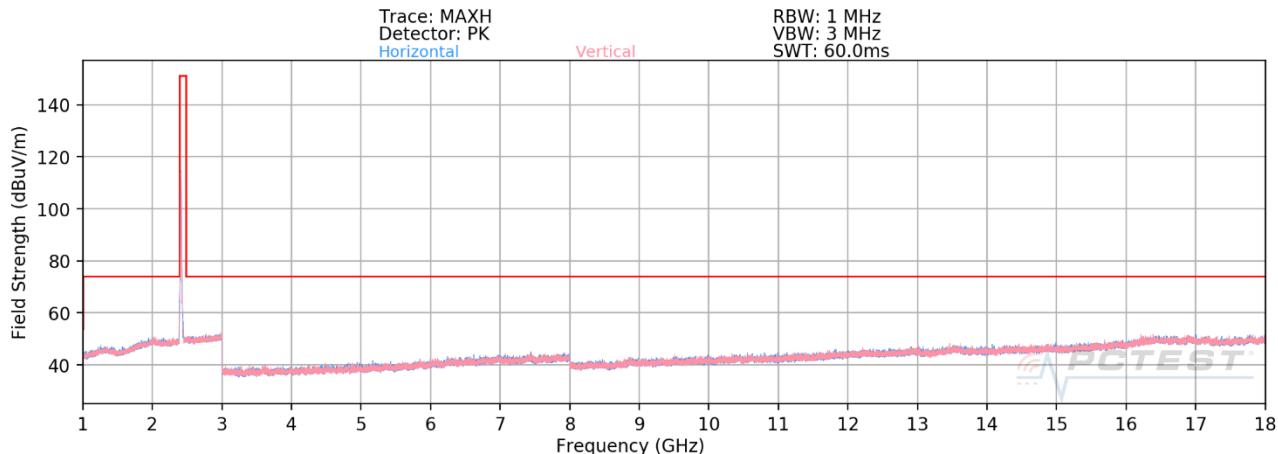

Plot 7-120. Radiated Spurious Emissions above 1GHz ANT 1a (802.11b – Ch. 1)

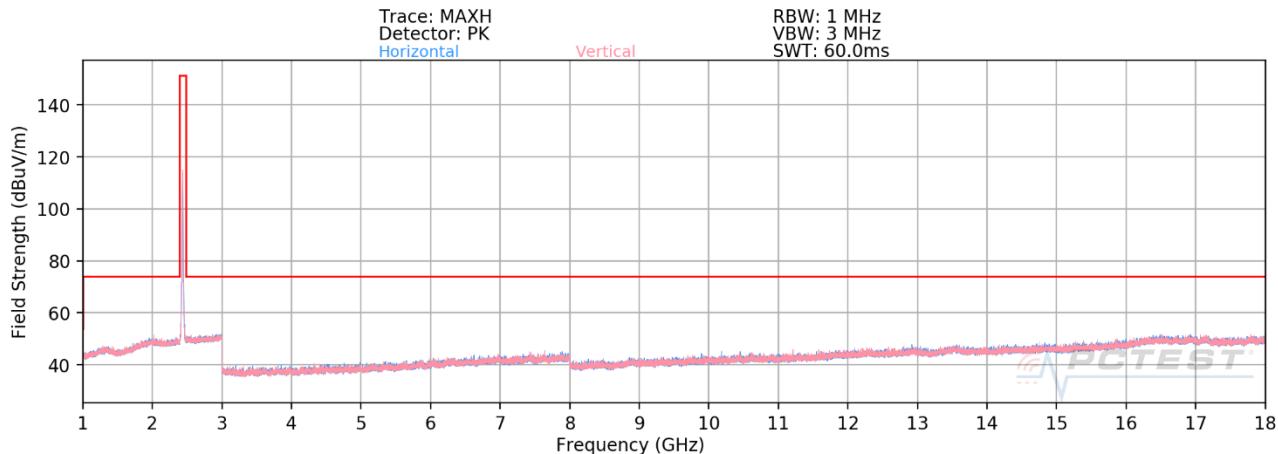

Plot 7-121. Radiated Spurious Emissions above 1GHz ANT 1a (802.11b – Ch. 6)

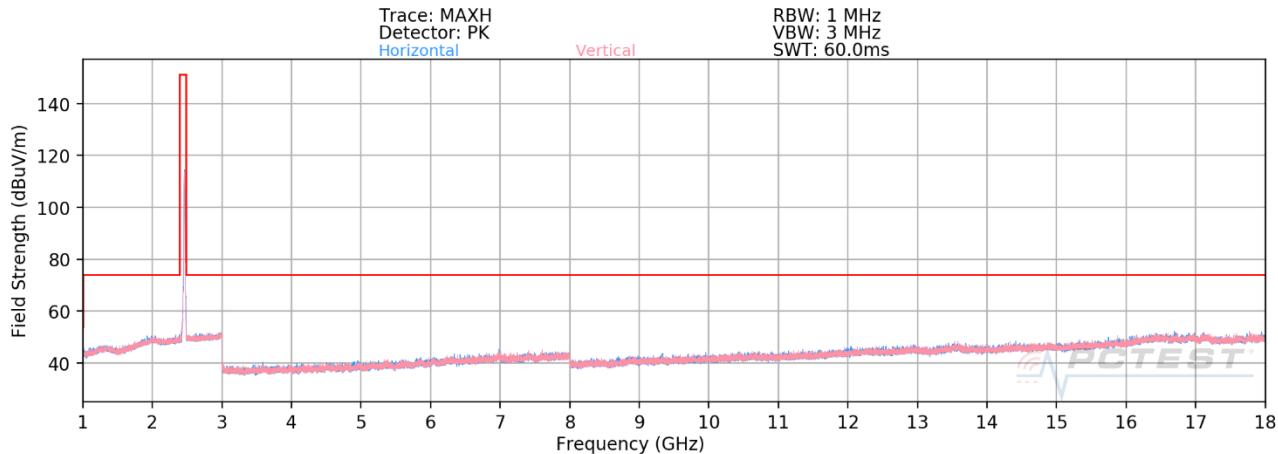

Plot 7-122. Radiated Spurious Emissions above 1GHz ANT 1a (802.11b – Ch. 11)

FCC ID: BCGA2072	PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device		Page 93 of 134

Antenna 1a Radiated Spurious Emission Measurements
§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11b
Worst Case Transfer Rate:	1Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4824.00	Avg	H	322	356	-78.05	6.08	35.03	53.98	-18.95
4824.00	Peak	H	322	356	-67.27	6.08	45.81	73.98	-28.17
12060.00	Avg	H	-	-	-85.28	15.05	36.77	53.98	-17.21
12060.00	Peak	H	-	-	-74.24	15.05	47.81	73.98	-26.17

Table 7-19. Radiated Measurements ANT 1a

Worst Case Mode:	802.11b
Worst Case Transfer Rate:	1Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	2437MHz
Channel:	06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4874.00	Avg	H	-	-	-81.02	5.96	31.94	53.98	-22.03
4874.00	Peak	H	-	-	-69.44	5.96	43.52	73.98	-30.45
7311.00	Avg	H	-	-	-81.62	9.79	35.17	53.98	-18.80
7311.00	Peak	H	-	-	-69.99	9.79	46.80	73.98	-27.17
12185.00	Avg	H	-	-	-84.90	14.93	37.03	53.98	-16.95
12185.00	Peak	H	-	-	-73.50	14.93	48.43	73.98	-25.55

Table 7-20. Radiated Measurements ANT 1a

FCC ID: BCGA2072	 PCTEST® Proud to be part of 			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device			

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4924.00	Avg	H	-	-	-82.27	6.65	31.38	53.98	-22.60
4924.00	Peak	H	-	-	-70.96	6.65	42.69	73.98	-31.29
7386.00	Avg	H	-	-	-82.75	9.87	34.12	53.98	-19.86
7386.00	Peak	H	-	-	-71.05	9.87	45.82	73.98	-28.16
12310.00	Avg	H	-	-	-85.46	15.38	36.92	53.98	-17.06
12310.00	Peak	H	-	-	-74.24	15.38	48.14	73.98	-25.84

Table 7-21. Radiated Measurements ANT 1a


FCC ID: BCGA2072	 PCTEST® Proud to be part of  MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device	Page 95 of 134	

7.7.3 CDD Radiated Spurious Emission Measurements


§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

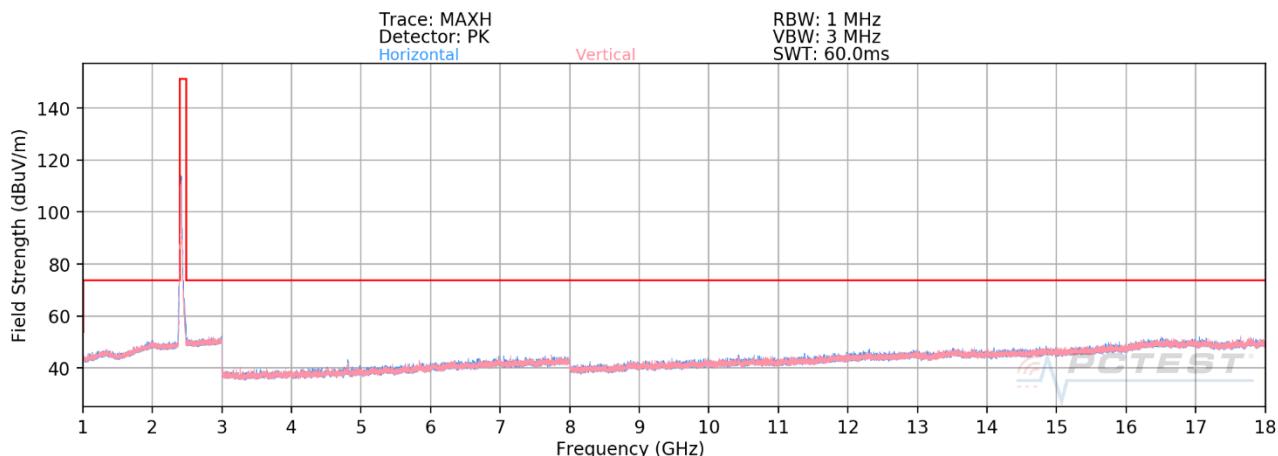

Plot 7-123. Radiated Spurious Emissions above 1GHz CDD (802.11n – Ch. 1)

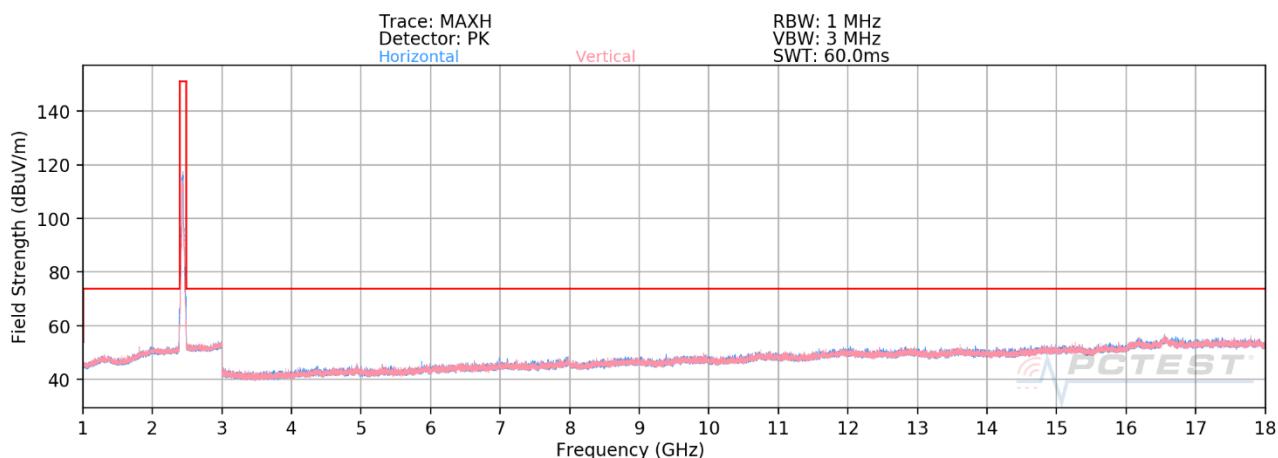

Plot 7-124. Radiated Spurious Emissions above 1GHz CDD (802.11n – Ch. 6)


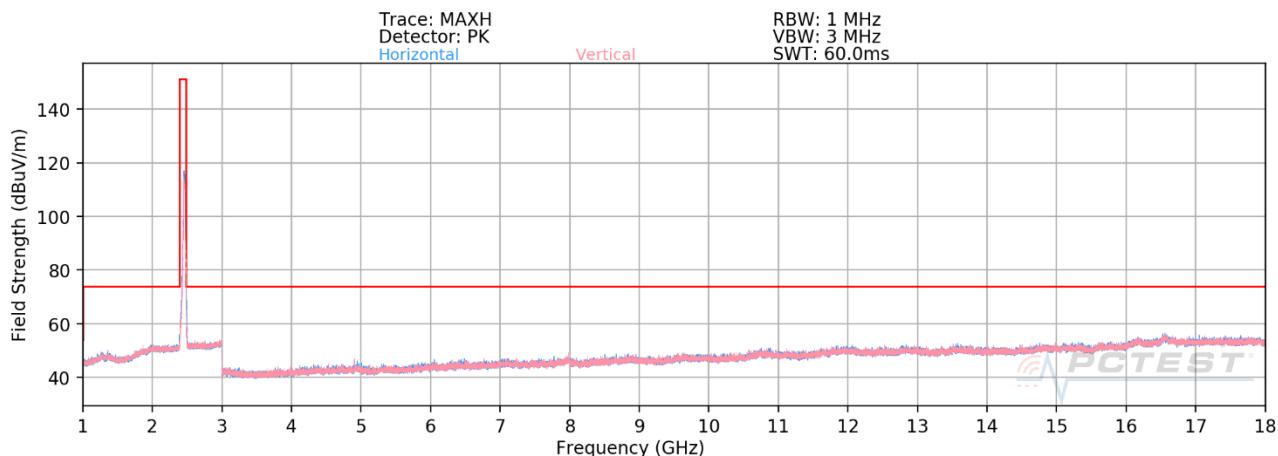


Plot 7-125. Radiated Spurious Emissions above 1GHz CDD (802.11n – Ch. 11)

FCC ID: BCGA2072	PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device		Page 96 of 134

CDD Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209; RSS-Gen [8.9]

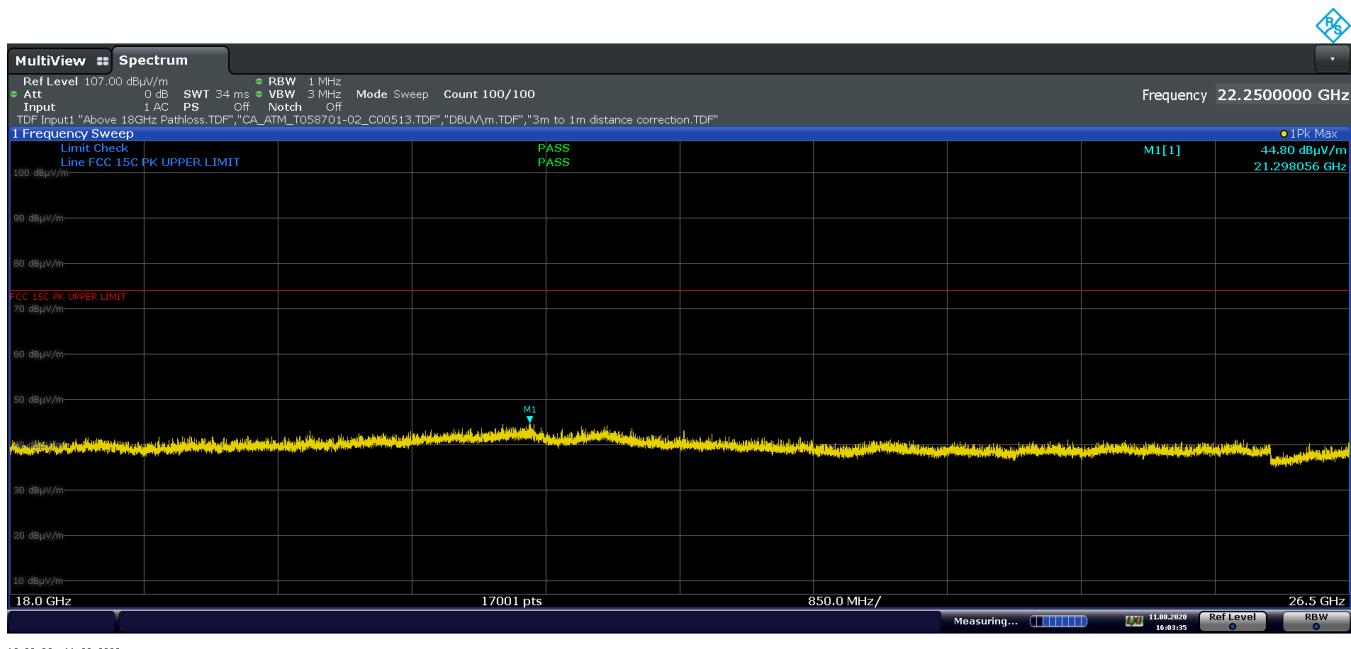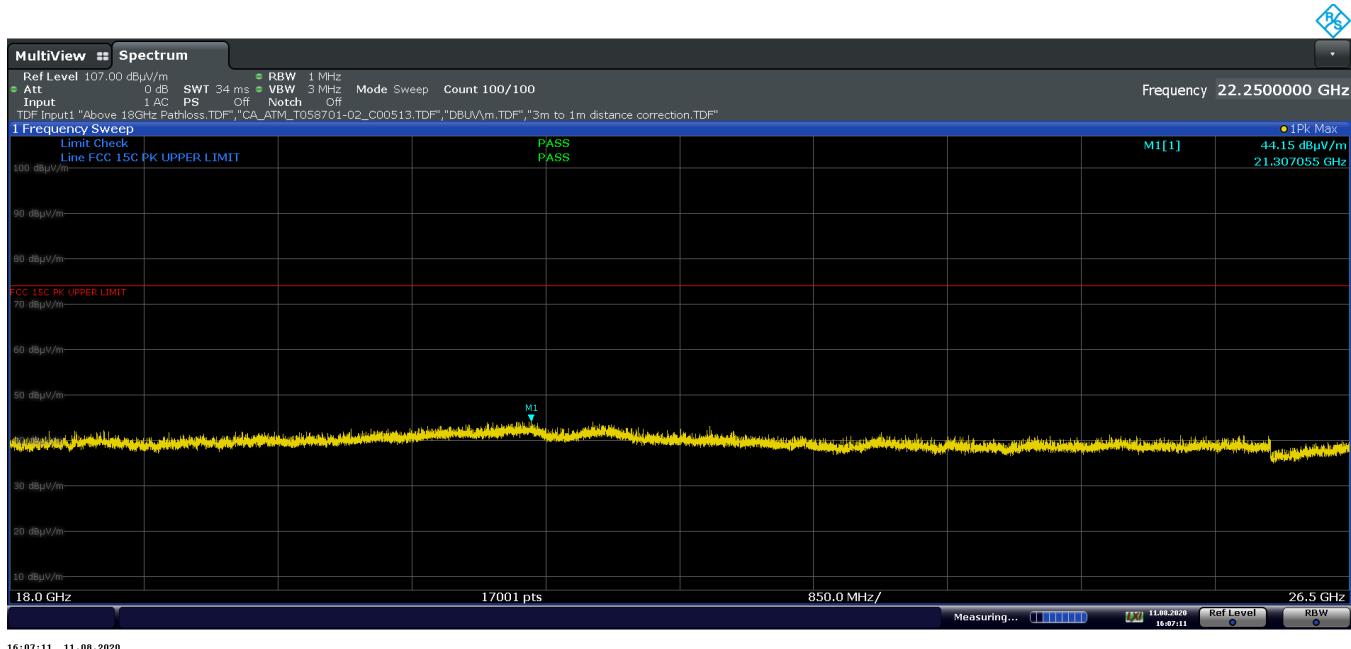

FCC ID: BCGA2072	PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device	Page 97 of 134	

CDD Radiated Spurious Emission Measurements
§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS15
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4824.00	Avg	H	113	171	-73.02	6.44	40.42	53.98	-13.56
4824.00	Peak	H	113	171	-59.27	6.44	54.17	73.98	-19.81
12060.00	Avg	H	-	-	-82.27	15.30	40.03	53.98	-13.95
12060.00	Peak	H	-	-	-71.00	15.30	51.30	73.98	-22.68

Table 7-22. Radiated Measurements CDD

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS15
Distance of Measurements:	3 Meters
Operating Frequency:	2437MHz
Channel:	06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4874.00	Avg	H	117	171	-78.59	6.33	34.74	53.98	-19.24
4874.00	Peak	H	117	171	-65.40	6.33	47.93	73.98	-26.05
7311.00	Avg	H	-	-	-81.69	9.95	35.26	53.98	-18.72
7311.00	Peak	H	-	-	-69.88	9.95	47.07	73.98	-26.91
12185.00	Avg	H	-	-	-82.50	15.14	39.64	53.98	-14.34
12185.00	Peak	H	-	-	-70.35	15.14	51.79	73.98	-22.19

Table 7-23. Radiated Measurements CDD

FCC ID: BCGA2072	PCTEST® Proud to be part of 				MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device				

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS15
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4924.00	Avg	H	121	165	-76.49	6.94	37.45	53.98	-16.53
4924.00	Peak	H	121	165	-63.16	6.94	50.78	73.98	-23.20
7386.00	Avg	H	-	-	-81.88	9.99	35.11	53.98	-18.87
7386.00	Peak	H	-	-	-69.91	9.99	47.08	73.98	-26.90
12310.00	Avg	H	-	-	-82.61	15.53	39.92	53.98	-14.06
12310.00	Peak	H	-	-	-71.35	15.53	51.18	73.98	-22.80

Table 7-24. Radiated Measurements CDD


FCC ID: BCGA2072	 PCTEST® <small>Proud to be part of element</small>			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device			

7.7.4 Antenna 3a Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.


Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 1

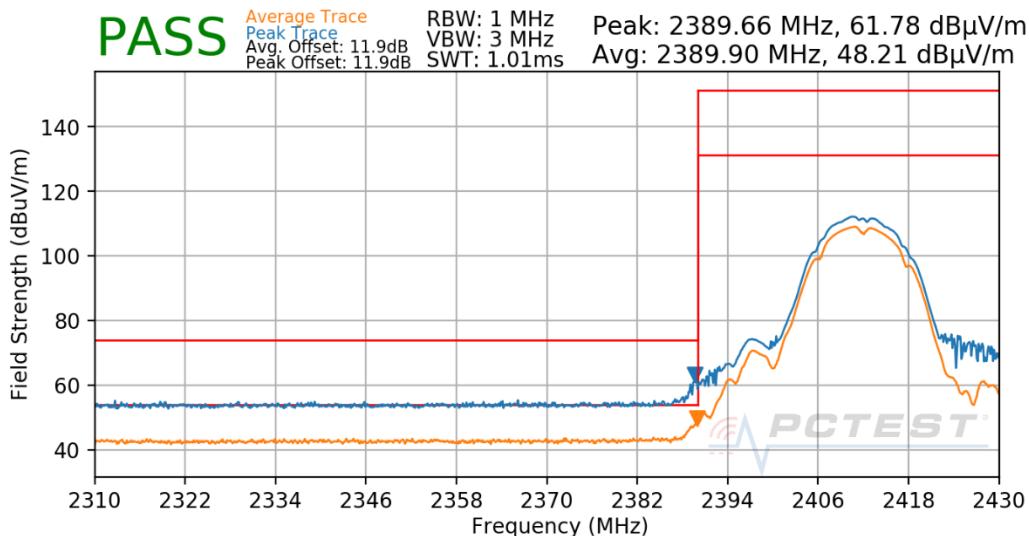

Plot 7-128. Radiated Restricted Lower Band Edge Measurement ANT 3a


FCC ID: BCGA2072	 PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device		Page 100 of 134

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2417MHz
 Channel: 2

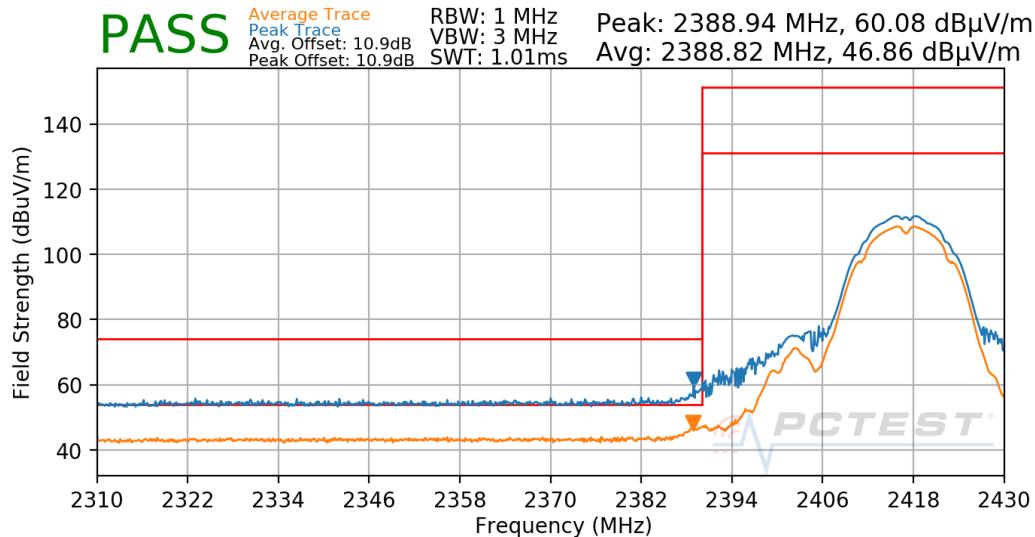

Plot 7-129. Radiated Restricted Lower Band Edge Measurement ANT 3a


Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2422MHz
 Channel: 3

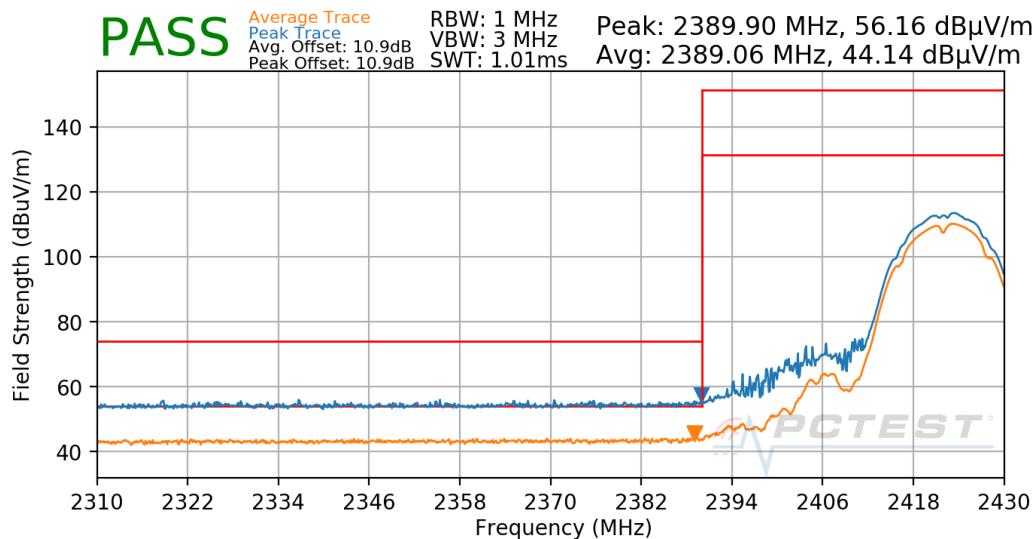

Plot 7-130. Radiated Restricted Lower Band Edge Measurement ANT 3a


FCC ID: BCGA2072	PCTEST® Proud to be part of 			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device			Page 101 of 134

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

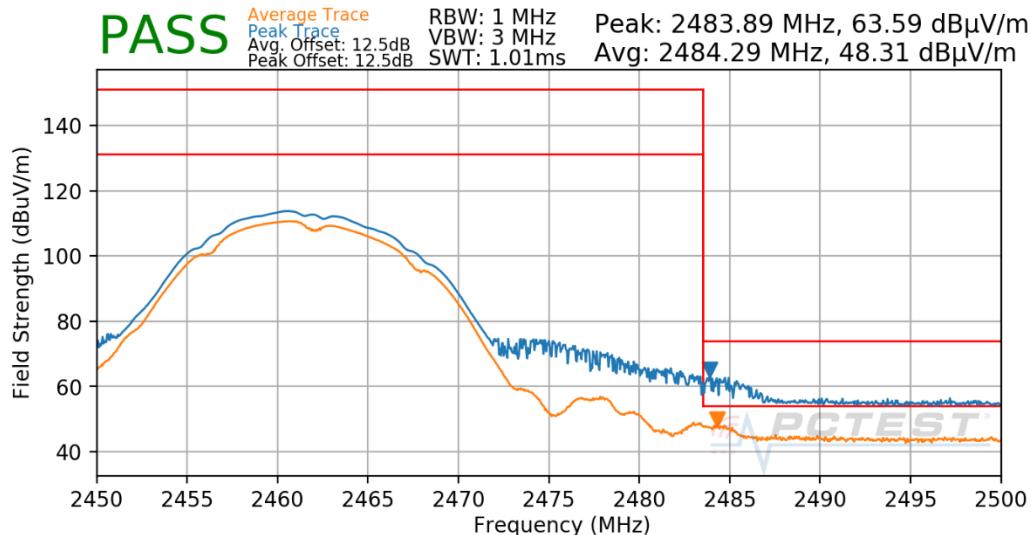

Plot 7-131. Radiated Restricted Upper Band Edge Measurement ANT 3a


Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

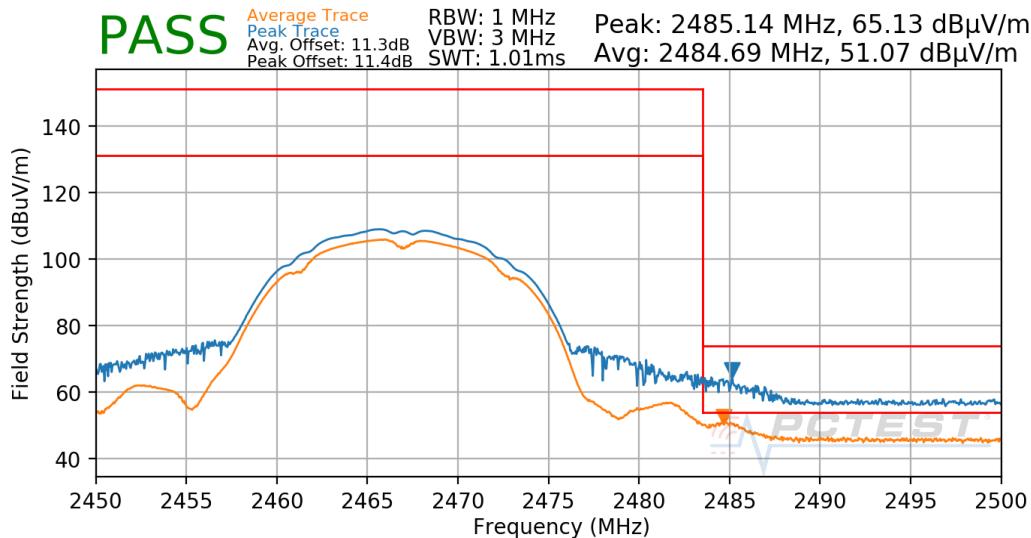

Plot 7-132. Radiated Restricted Upper Band Edge Measurement ANT 3a

FCC ID: BCGA2072	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device	Page 102 of 134	


Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2472MHz
 Channel: 13

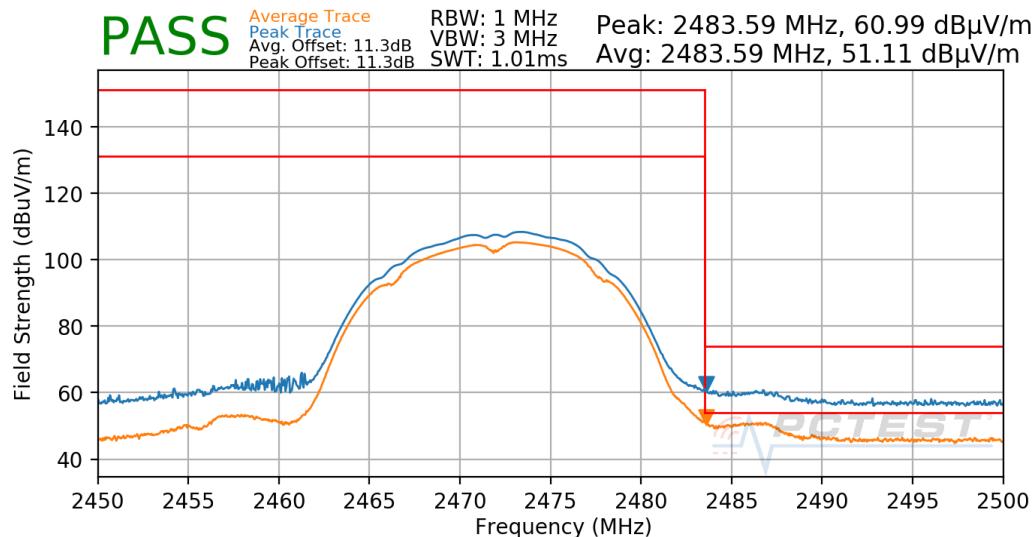

Plot 7-133. Radiated Restricted Upper Band Edge Measurement ANT 3a


FCC ID: BCGA2072	PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device	Page 103 of 134	

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS7
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

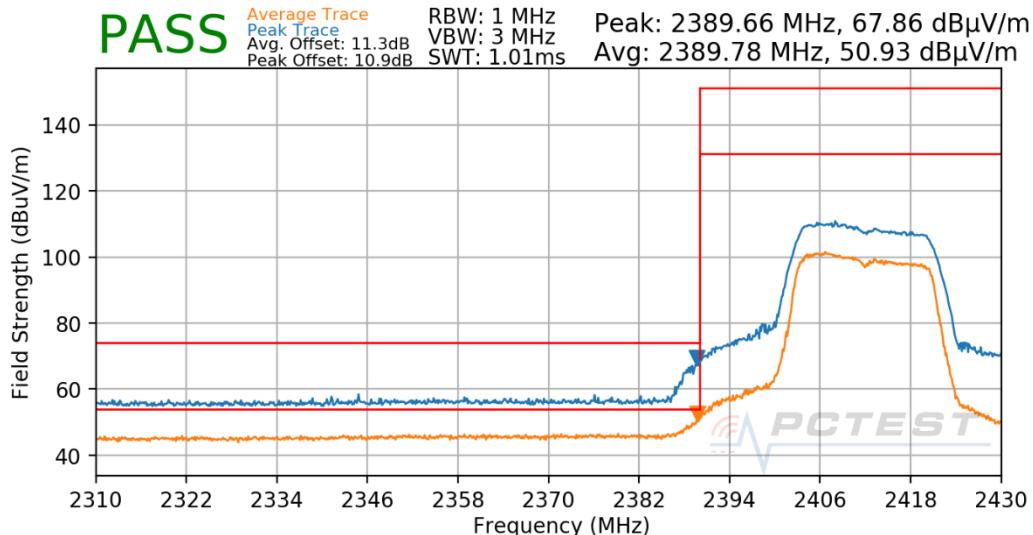

Plot 7-134. Radiated Restricted Lower Band Edge Measurement ANT 3a


Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS7
 Distance of Measurements: 3 Meters
 Operating Frequency: 2417MHz
 Channel: 2

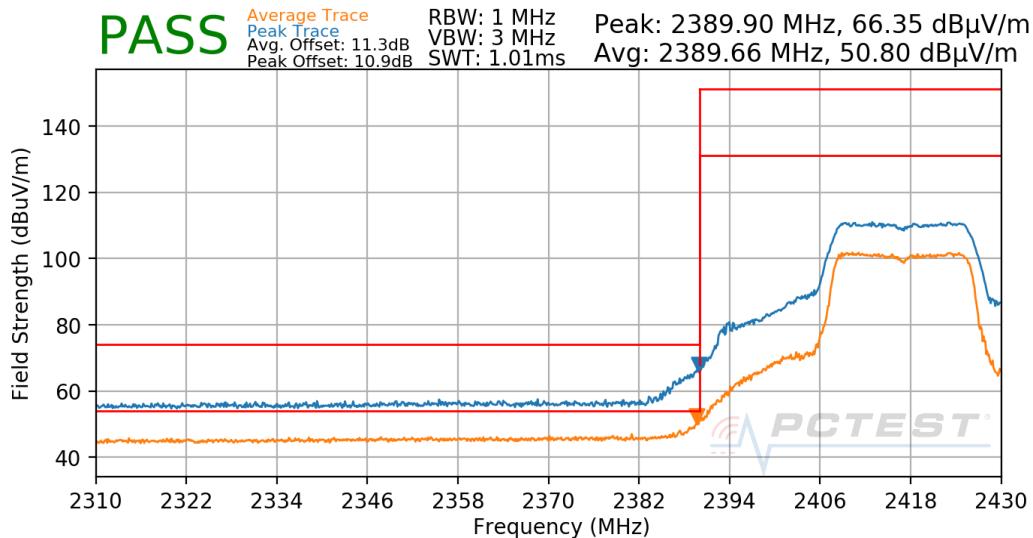

Plot 7-135. Radiated Restricted Lower Band Edge Measurement ANT 3a


FCC ID: BCGA2072	PCTEST Proud to be part of 			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device			

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS7
 Distance of Measurements: 3 Meters
 Operating Frequency: 2422MHz
 Channel: 3

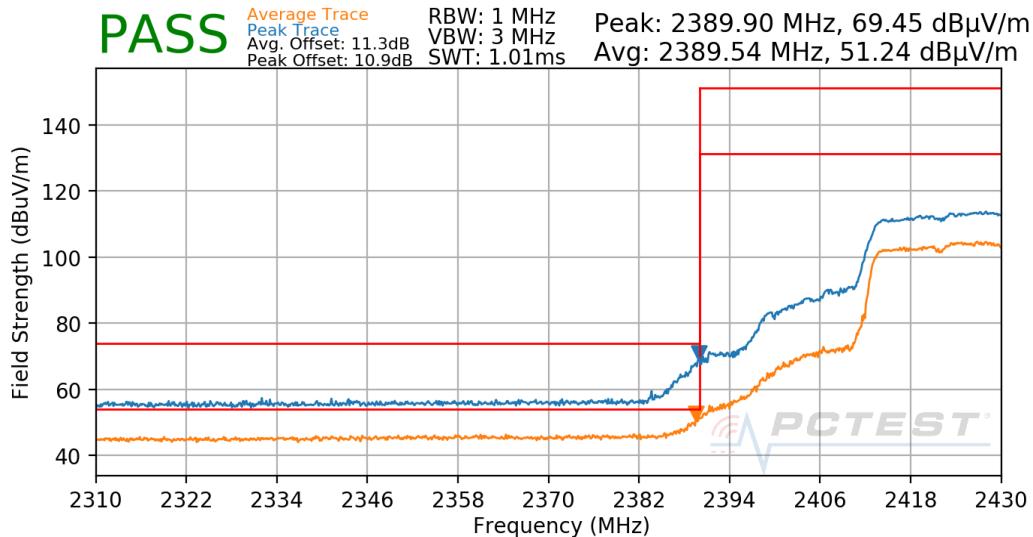

Plot 7-136. Radiated Restricted Lower Band Edge Measurement ANT 3a


Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS7
 Distance of Measurements: 3 Meters
 Operating Frequency: 2427MHz
 Channel: 4

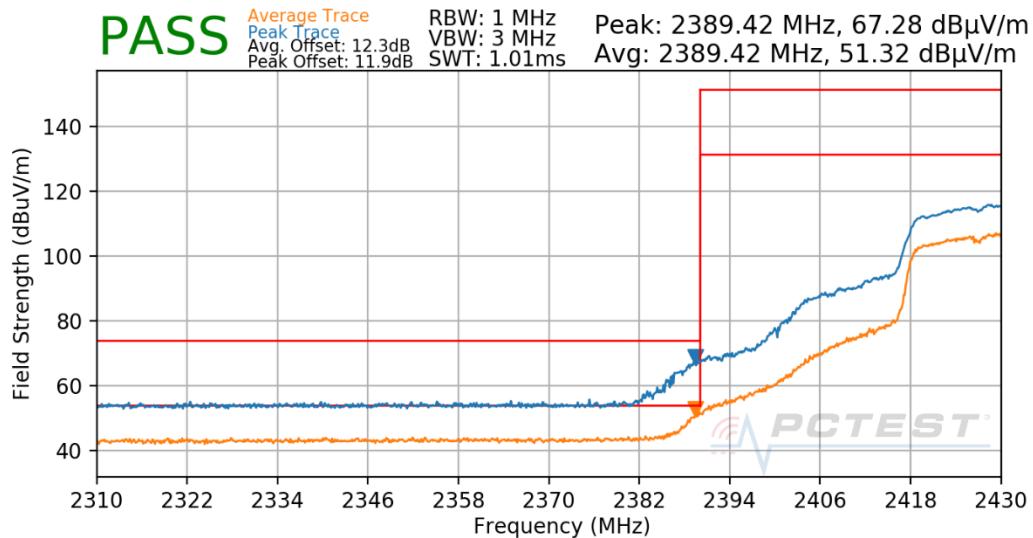

Plot 7-137. Radiated Restricted Lower Band Edge Measurement ANT 3a


FCC ID: BCGA2072	PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device	Page 105 of 134	

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS7
 Distance of Measurements: 3 Meters
 Operating Frequency: 2442MHz
 Channel: 7

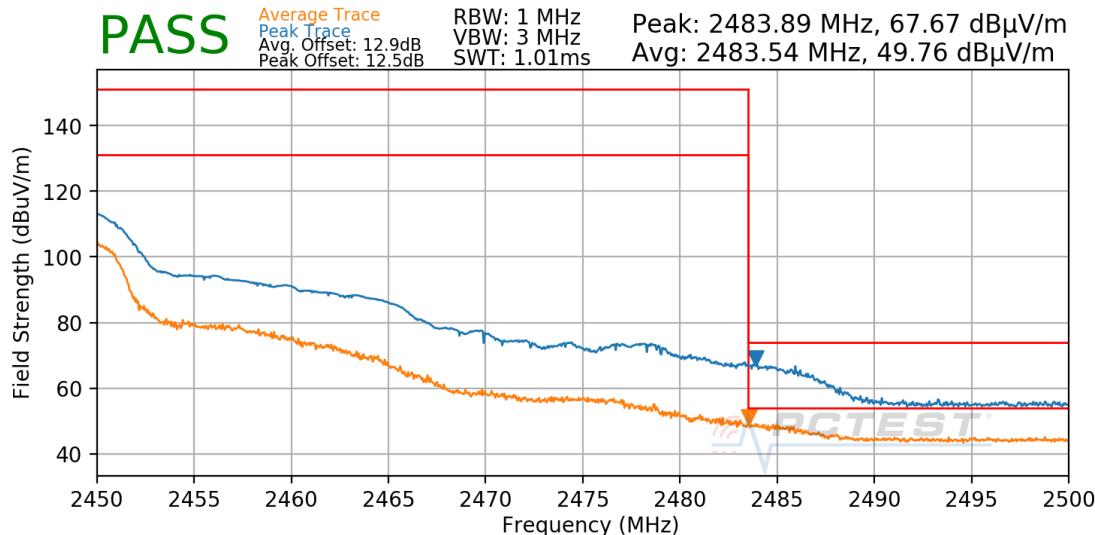

Plot 7-138. Radiated Restricted Upper Band Edge Measurement ANT 3a


Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS7
 Distance of Measurements: 3 Meters
 Operating Frequency: 2447MHz
 Channel: 8

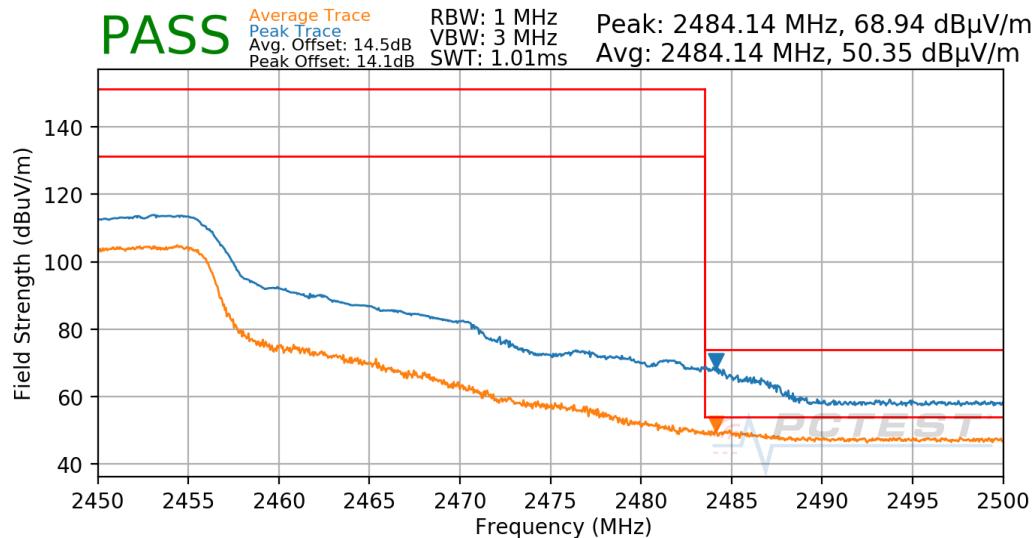

Plot 7-139. Radiated Restricted Upper Band Edge Measurement ANT 3a


FCC ID: BCGA2072	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device	Page 106 of 134	

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS7
 Distance of Measurements: 3 Meters
 Operating Frequency: 2452MHz
 Channel: 9

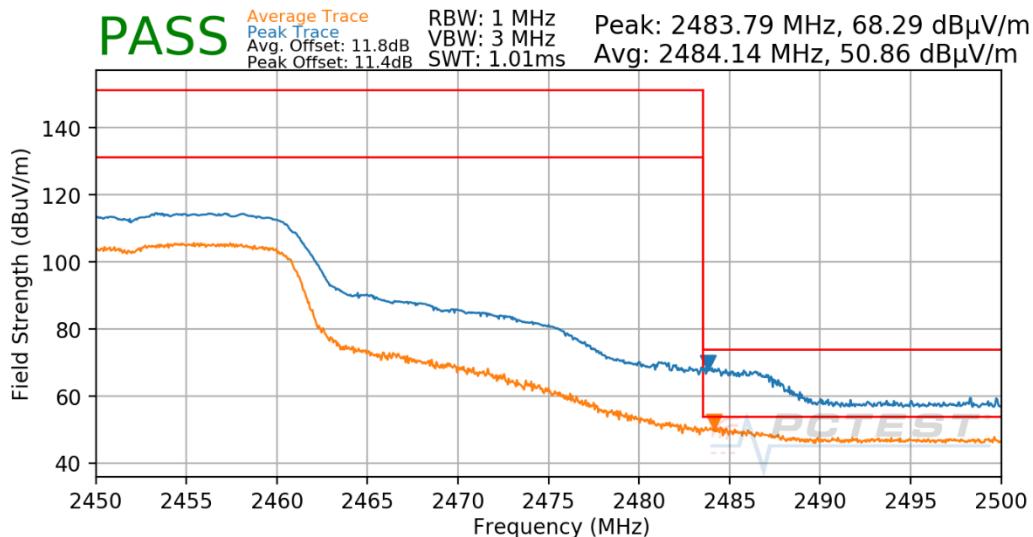

Plot 7-140. Radiated Restricted Upper Band Edge Measurement ANT 3a


Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS7
 Distance of Measurements: 3 Meters
 Operating Frequency: 2457MHz
 Channel: 10

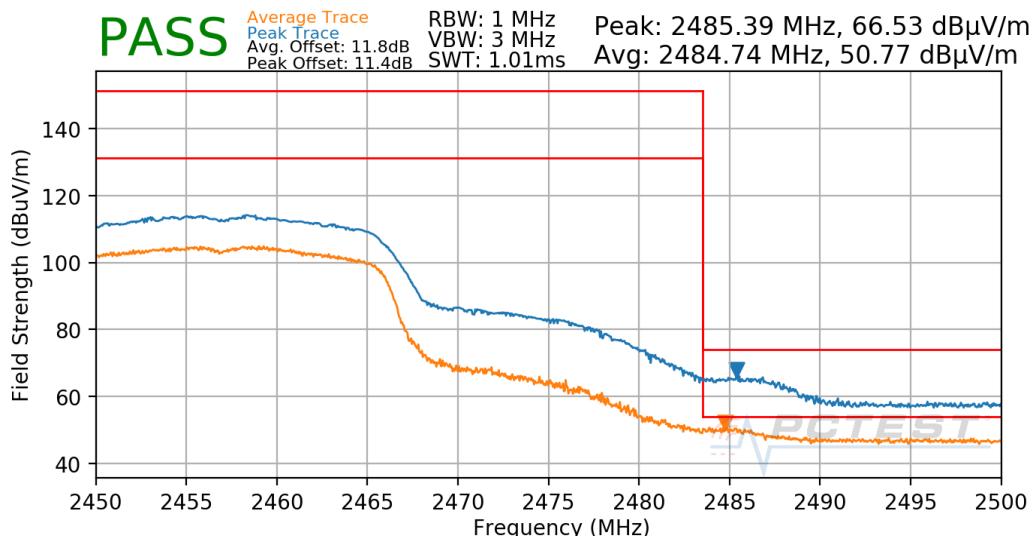

Plot 7-141. Radiated Restricted Upper Band Edge Measurement ANT 3a


FCC ID: BCGA2072	PCTEST® Proud to be part of 			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device			Page 107 of 134

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS7
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

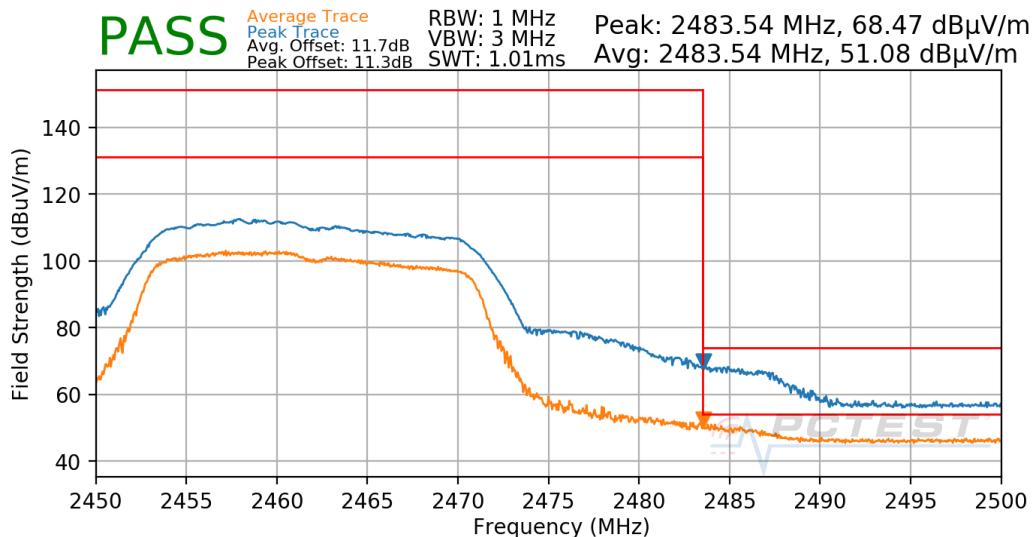

Plot 7-142. Radiated Restricted Upper Band Edge Measurement ANT 3a


Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS7
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

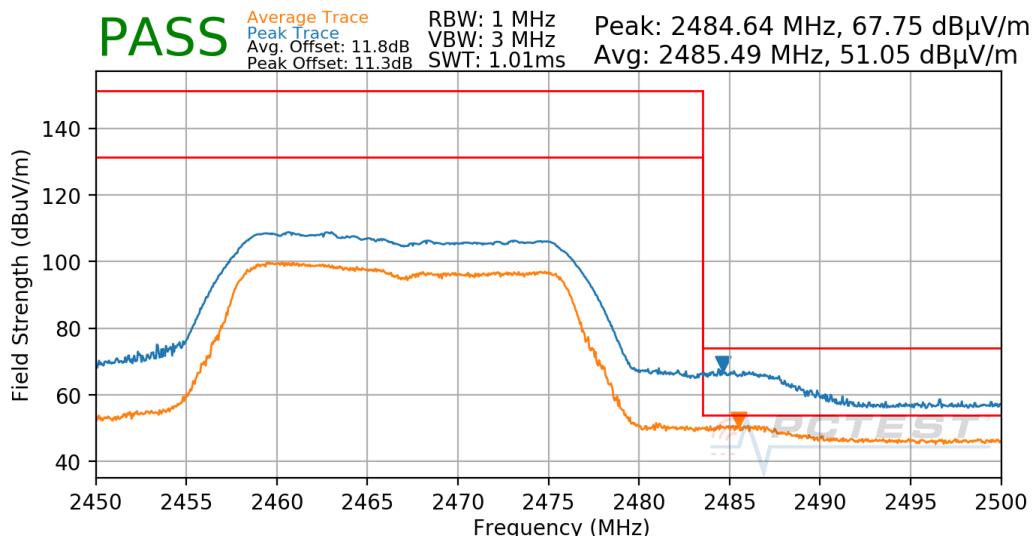

Plot 7-143. Radiated Restricted Upper Band Edge Measurement ANT 3a

FCC ID: BCGA2072	PCTEST® Proud to be part of 			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device			Page 108 of 134

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS7
 Distance of Measurements: 3 Meters
 Operating Frequency: 2472MHz
 Channel: 13

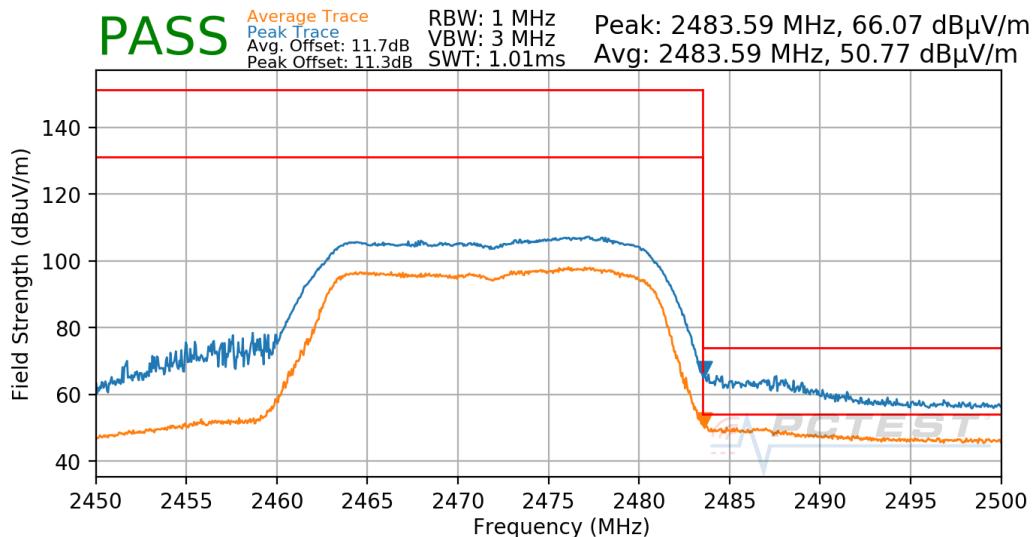

Plot 7-144. Radiated Restricted Upper Band Edge Measurement ANT 3a


FCC ID: BCGA2072	PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device	Page 109 of 134	

7.7.5 Antenna 1a Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 1

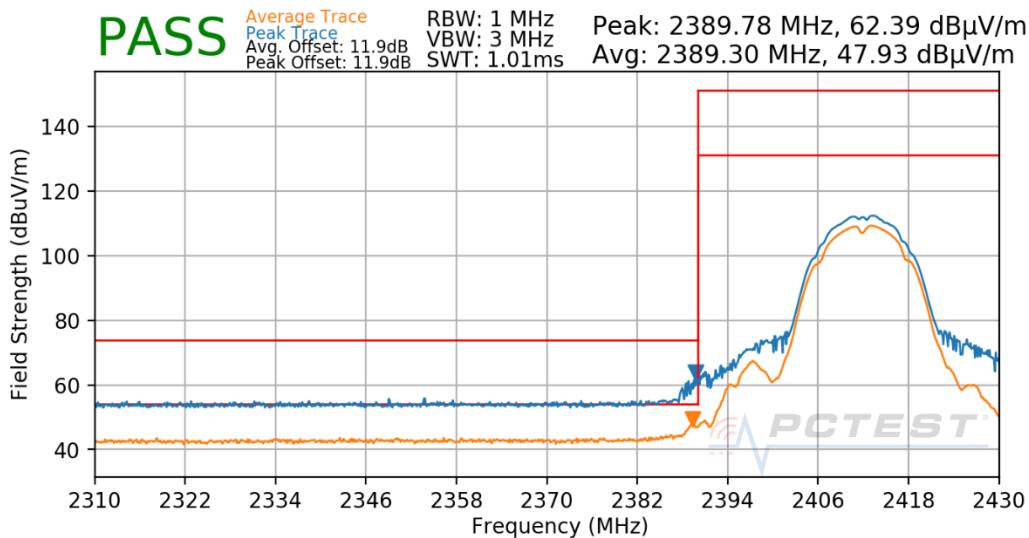

Plot 7-145. Radiated Restricted Lower Band Edge Measurement ANT 1a

FCC ID: BCGA2072	PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270030-06.BCG	Test Dates: 07/16/2020 - 09/08/2020	EUT Type: Tablet Device		Page 110 of 134