



TEST REPORT

Test Report No. : UL-RPT-RP12505086JD10E

Customer : Apple Inc.
Model No. : A2116
FCC ID : BCGA2116
Technology : WLAN
Test Standard(s) : FCC Parts 15.209(a) & 15.407

Test Laboratory : UL VS LTD, Basingstoke, Hampshire, RG24 8AH, United Kingdom

1. This test report shall not be reproduced in full or partial, without the written approval of UL VS LTD.
2. The results in this report apply only to the sample(s) tested.
3. The sample tested is in compliance with the above standard(s).
4. The test results in this report are traceable to the national or international standards.
5. Version 1.0

Date of Issue: 03 January 2019

Checked by:

Sarah Williams
Senior Test Engineer, Radio Laboratory

Company Signatory:

Ben Mercer
Senior Test Engineer, Radio Laboratory
UL VS LTD



UL VS LTD

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire, RG23 8BG, UK
Telephone: +44 (0)1256 312000
Facsimile: +44 (0)1256 312001

Customer Information

Company Name:	Apple Inc.
Address:	One Apple Park Way Cupertino, California 95014 U.S.A.
Contact Name:	Stuart Thomas

Report Revision History

Version Number	Issue Date	Revision Details	Revised By
1.0	03/01/2019	Initial Version	Sarah Williams

Table of Contents

Customer Information	2
Report Revision History	2
1. Attestation of Test Results	5
1.1. Description of EUT	5
1.2. General Information	5
1.3. Summary of Test Results	6
1.4. Deviations from the Test Specification	6
2. Summary of Testing	7
2.1. Facilities and Accreditation	7
2.2. Methods and Procedures	7
2.3. Calibration and Uncertainty	8
2.4. Test and Measurement Equipment	9
3. Equipment Under Test (EUT)	11
3.1. Identification of Equipment Under Test (EUT)	11
3.2. Modifications Incorporated in the EUT	11
3.3. Additional Information Related to Testing	11
3.4. Description of Available Antennas	14
3.5. Description of Test Setup	15
4. Antenna Port Test Results	21
4.1. Transmitter Duty Cycle	21
4.2. Transmitter 26 dB Emission Bandwidth	23
4.2.1. 5.15-5.25 GHz band	24
4.2.2. 5.25-5.35 GHz band	28
4.2.3. 5.47-5.725 GHz band	32
4.2.4. Channels that straddle the U-NII-2C and U-NII-3 bands	36
4.2.5. 5.725-5.85 GHz band	40
4.3. Transmitter Minimum 6 dB Bandwidth (5.725-5.85 GHz band)	44
4.3.1. Channels that straddle the U-NII-2C and the U-NII-3 bands at 5.725 GHz	45
4.3.2. 5.725-5.85 GHz band	47
4.4. Transmitter Maximum Conducted Output Power	51
4.4.1. 5.15-5.25 GHz band	51
4.4.2. 5.25-5.35 GHz band	56
4.4.3. 5.47-5.725 GHz band	61
4.4.4. Channels that straddle the U-NII-2C and U-NII-3 bands	66
4.4.5. 5.725-5.85 GHz band	70
4.5. Transmitter Maximum Power Spectral Density	75
4.5.1. 5.15-5.25 GHz band	75
4.5.2. 5.25-5.35 GHz band	77
4.5.3. 5.47-5.725 GHz band	79
4.5.4. Channels that straddle the U-NII-2C and U-NII-3 bands	81
4.5.5. 5.725-5.85 GHz band	83
5. Radiated Test Results	85
5.1. Transmitter Out of Band Radiated Emissions <1 GHz	85
5.2. Transmitter Out of Band Radiated Emissions >1 GHz	87
5.2.1. 5.15-5.25 GHz band	87
5.2.2. 5.25-5.35 GHz band	88
5.2.3. 5.47-5.725 GHz band	89
5.2.4. Channels that straddle the U-NII-2C and U-NII-3 bands at 5725 MHz	90
5.2.5. 5.725-5.85 GHz band	91
5.3. Transmitter Band Edge Radiated Emissions	94

5.3.1. 5.15-5.25 GHz band	94
5.3.2. 5.25-5.35 GHz band	99
5.3.3. 5.47-5.725 GHz band	104
5.3.4. 5.725-5.85 GHz band	113

1. Attestation of Test Results

1.1. Description of EUT

The equipment under test was a desktop computer with WLAN and BT radios.

1.2. General Information

Specification Reference:	47CFR15.407 and 47CFR15.403
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart E (Unlicensed National Information Infrastructure Devices) – Sections 15.403 and 15.407
Specification Reference:	47CFR15.209
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) - Section 15.209
Site Registration:	209735
Location of Testing:	UL VS LTD, Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, United Kingdom
Test Dates:	25 October 2018 to 18 November 2018

1.3. Summary of Test Results

FCC Reference (47CFR)	Measurement	Result
Part 15.35(c)	Transmitter Duty Cycle	Note 1
Part 15.403(i)	Transmitter 26 dB Emission Bandwidth	Complied
Part 15.407(e)	Transmitter Minimum 6 dB Bandwidth (5.725-5.85 GHz band)	Complied
Part 15.407(e)	Transmitter Minimum 6 dB Bandwidth (Channels that straddle the U-NII-2C and U-NII-3 bands at 5725 MHz)	Complied
Part 15.407(a)(1)(iv)	Transmitter Maximum Conducted Output Power (5.15-5.25 GHz band)	Complied
Part 15.407(a)(2)	Transmitter Maximum Conducted Output Power (5.25-5.35 GHz & 5.47-5.725 GHz bands)	Complied
Part 15.407(a)(2)	Transmitter Maximum Conducted Output Power (Channels that straddle the U-NII-2C and U-NII-3 bands at 5725 MHz)	Complied
Part 15.407(a)(3)	Transmitter Maximum Conducted Output Power (5.725-5.85 GHz band)	Complied
Part 15.407(a)(1)(iv)	Transmitter Maximum Power Spectral Density (5.15-5.25 GHz band)	Complied
Part 15.407(a)(2)	Transmitter Maximum Power Spectral Density (5.25-5.35 GHz & 5.47-5.725 GHz bands)	Complied
Part 15.407(a)(2)	Transmitter Maximum Power Spectral Density (Channels that straddle the U-NII-2C and U-NII-3 bands at 5725 MHz)	Complied
Part 15.407(a)(3)	Transmitter Maximum Power Spectral Density (5.725-5.85 GHz band)	Complied
Part 15.407(b)/15.209(a)	Transmitter Out of Band Radiated Emissions	Complied
Part 15.407(b)/15.209(a)	Transmitter Band Edge Radiated Emissions	Complied
Part 15.407(g)	Transmitter Frequency Stability (Temperature & Voltage Variation)	Note 2
Part 15.407(h)(1)	Transmitter Power Control	Note 3

Note(s):

1. The measurement was performed to assist in the calculation of the level of average output power, power spectral density and emissions as the EUT employs pulsed operation.
2. Frequency stability is better than 20 ppm which ensures that the signal remains in the allocated bands under all operational conditions stated in the user manual.
3. Transmit Power Control was not tested as the maximum EIRP is less than 500 mW (27 dBm).

1.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specifications identified above.

2. Summary of Testing

2.1. Facilities and Accreditation

The test site and measurement facilities used to collect data are located at Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, United Kingdom. The following table identifies which facilities were utilised for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

Site 1	X
Site 2	-
Site 17	-

UL VS LTD is accredited by UKAS. The tests reported herein have been performed in accordance with its terms of accreditation.

2.2. Methods and Procedures

Reference:	ANSI C63.10-2013
Title:	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
Reference:	KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 December 14, 2017
Title:	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices (Part 15, Subpart E)

2.3. Calibration and Uncertainty

Measuring Instrument Calibration

In accordance with UKAS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value measured (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
Duty Cycle	5.15 GHz to 5.850 GHz	95%	$\pm 1.14 \%$
26 dB Emission Bandwidth	5.15 GHz to 5.850 GHz	95%	$\pm 4.59 \%$
Minimum 6 dB Emission Bandwidth	5.15 GHz to 5.850 GHz	95%	$\pm 4.59 \%$
Maximum Conducted Output Power	5.15 GHz to 5.850 GHz	95%	$\pm 1.13 \text{ dB}$
Maximum Power Spectral Density	5.15 GHz to 5.850 GHz	95%	$\pm 1.13 \text{ dB}$
Radiated Spurious Emissions	30 MHz to 1 GHz	95%	$\pm 4.65 \text{ dB}$
Radiated Spurious Emissions	1 GHz to 40 GHz	95%	$\pm 2.94 \text{ dB}$

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

2.4. Test and Measurement Equipment

Test Equipment Used for Transmitter Conducted Tests

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2042	Thermohygrometer	Testo	608-H1	458046425	26 Feb 2019	12
A3027	Attenuator	Broadwave Technologies	351-311-006	#1	Calibrated before use	-
A3028	Attenuator	Broadwave Technologies	351-311-006	#2	Calibrated before use	-
A3029	Attenuator	Broadwave Technologies	351-311-006	#3	Calibrated before use	-
A3004	RF Switch	Pickering Interfaces	64-102-002	XZ363230	Calibrated before use	-
M2033	Signal Analyser	Rohde & Schwarz	FSV13	101667	31 May 2019	12
G0607	Signal Generator	Rohde & Schwarz	SMU200A	100943	10 May 2019	36
A3005	RePlay Test Rack	N/A	N/A	N/A	Calibration not required	-

Test Equipment Used for Transmitter Radiated Emissions

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2040	Thermohygrometer	Testo	608-H1	45124934	27 Mar 2019	12
K0001	5m RSE Chamber	Rainford EMC	N/A	N/A	04 Oct 2019	12
M2044	Test Receiver	Rohde & Schwarz	ESU26	100122	17 Apr 2019	12
M1630	Test Receiver	Rohde & Schwarz	ESU40	100233	20 Sep 2019	12
A3154	Pre Amplifier	Com-Power Corp	PAM-103	18020012	14 Sep 2019	12
A3155	Pre Amplifier	Com-Power Corp	PAM-118A	18040037	14 Sep 2019	12
A2893	Amplifier	Schwarzbeck	BBV 9721	9721-021	26 Apr 2019	12
A553	Antenna	Chase	CBL6111A	1593	08 Oct 2019	12
A2892	Antenna	Schwarzbeck	BBHA 9170	9170-727	21 Feb 2019	12
A3138	Antenna	Schwarzbeck	BBHA 9120B	00702	03 Oct 2019	12
A3139	Antenna	Schwarzbeck	HWRD750	00027	04 Oct 2019	12
A2523	Attenuator	AtlanTecRF	AN18W5-10	832825#1	23 Feb 2019	12
A3083	Low Pass Filter	AtlanTecRF	AFL-01000	18010900076	29 Jun 2019	12
A3085	Low Pass Filter	AtlanTecRF	AFL-02000	18051600014	29 Jun 2019	12
A3095	High Pass Filter	AtlanTecRF	AFH-07000	18051600012	29 Jun 2019	12
A3112	Attenuator	AtlanTecRF	AN18-06	219706#2	Calibrated before use	-
A2937	Attenuator	AtlanTecRF	AN18W5-06	208147#1	23 Feb 2019	12

Test and Measurement Equipment (continued)**Test Equipment Used for Transmitter Band Edge Radiated Emissions**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2040	Thermohygrometer	Testo	608-H1	45124934	27 Mar 2019	12
K0001	5m RSE Chamber	Rainford EMC	N/A	N/A	04 Oct 2019	12
M2044	Test Receiver	Rohde & Schwarz	ESU26	100122	17 Apr 2019	12
A3155	Pre Amplifier	Com-Power Corp	PAM-118A	18040037	14 Sep 2019	12
A3138	Antenna	Schwarzbeck	BBHA 9120B	00702	03 Oct 2019	12
A2523	Attenuator	AtlanTecRF	AN18W5-10	832825#1	23 Feb 2019	12

Test Measurement Software/Firmware Used

Name	Version	Release Date
UL VS LTD Replay	v.9	29 Oct 2018

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	Apple
Model Name or Number:	A2116
Test Sample Serial Number:	C02X2007KFLX (<i>Conducted sample</i>)
Hardware Version:	EVT
Software Version:	18A334
FCC ID:	BCGA2116

Brand Name:	Apple
Model Name or Number:	A2116
Test Sample Serial Number:	C02WW00PKFMM (<i>Radiated sample</i>)
Hardware Version:	EVT
Software Version:	18E110z
FCC ID:	BCGA2116

3.2. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.3. Additional Information Related to Testing

Technology Tested:	WLAN (IEEE 802.11a,n,ac) / U-NII	
Type of Unit:	Transceiver	
Modulation:	BPSK, QPSK, 16QAM, 64QAM & 256QAM	
Data rates:	802.11a	6, 9, 12, 18, 24, 36 ,48 & 54 Mbps
	802.11n HT20	MCS0 to MCS7 (SISO)
	802.11n HT40	MCS0 to MCS7 (SISO)
	802.11ac VHT20	MCS0 to MCS8 (SISO)
	802.11ac VHT40	MCS0 to MCS9 (SISO)
	802.11ac VHT80	MCS0 to MCS9 (SISO)
Power Supply Requirement(s):	Nominal	120 VAC 60 Hz
Maximum Conducted Output Power:	20 MHz	22.3 dBm
	40 MHz	22.2 dBm
	80 MHz	20.0 dBm

Additional Information Related to Testing (continued)

Channel Spacing:	20 MHz		
Transmit Frequency Band:	5150 MHz to 5250 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	36	5180
	Middle	40	5200
	Top	48	5240
Transmit Frequency Band:	5250 MHz to 5350 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	52	5260
	Middle	56	5280
	Top	64	5320
Transmit Frequency Band:	5470 MHz to 5725 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	100	5500
	Middle	116	5580
	Top	140	5700
Transmit Frequency Band:	Channels that straddle the U-NII-2C and U-NII-3 bands at 5725 MHz		
Transmit Channel Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Single	144	5720
Transmit Frequency Band:	5725 MHz to 5850 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	149	5745
	Middle	157	5785
	Top	165	5825

Additional Information Related to Testing (continued)

Channel Spacing:	40 MHz		
Transmit Frequency Band:	5150 MHz to 5250 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	38	5190
	Top	46	5230
Transmit Frequency Band:	5250 MHz to 5350 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	54	5270
	Top	62	5310
Transmit Frequency Band:	5470 MHz to 5725 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	102	5510
	Middle	118	5590
	Top	134	5670
Transmit Frequency Band:	Channels that straddle the U-NII-2C and U-NII-3 bands at 5725 MHz		
Transmit Channel Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Single	142	5710
Transmit Frequency Band:	5725 MHz to 5850 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	151	5755
	Top	159	5795

Additional Information Related to Testing (continued)

Channel Spacing:	80 MHz		
Transmit Frequency Band:	5150 MHz to 5250 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Single	42	5210
Transmit Frequency Band:	5250 MHz to 5350 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Single	58	5290
Transmit Frequency Band:	5470 MHz to 5725 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	106	5530
	Top	122	5610
Transmit Frequency Band:	Channels that straddle the U-NII-2C and U-NII-3 bands at 5725 MHz		
Transmit Channel Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Single	138	5690
Transmit Frequency Band:	5725 MHz to 5850 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Single	155	5775

3.4. Description of Available Antennas

The radio utilizes an integrated antenna, with the following maximum gains:

Frequency Range (MHz)	Antenna Gain (dBi)
5150 to 5250	4.8
5250 to 5350	4.5
5470 to 5725	4.7
5725 to 5850	4.9

3.5. Description of Test Setup

Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	USB-C Adapter
Brand Name:	Apple
Model Name or Number:	A1632
Serial Number:	Not marked or stated

Description:	PHF (Personal Hands Free)
Brand Name:	Apple
Model Name or Number:	Apple EarPods
Serial Number:	Not marked or stated

Description:	USB Mouse
Brand Name:	Apple
Model Name or Number:	A1152
Serial Number:	CC2446203PNDNYPAJ

Description:	USB Keyboard
Brand Name:	Apple
Model Name or Number:	A1243
Serial Number:	CC2438202G4DQW0AC

Description:	USB Hub
Brand Name:	Hama
Model Name or Number:	00078498
Serial Number:	09825891600

Description:	Ethernet Router
Brand Name:	Netgear
Model Name or Number:	DG834G
Serial Number:	1JX167B008C4A

Support Equipment (continued)

Description:	Ethernet cable. Length 1.0 metres
Brand Name:	Not marked or stated
Model Name or Number:	Not marked or stated
Serial Number:	Not marked or stated

Description:	Type A USB Cable. Length 3.0 metres. Quantity 4
Brand Name:	Not marked or stated
Model Name or Number:	Not marked or stated
Serial Number:	Not marked or stated

Operating Modes

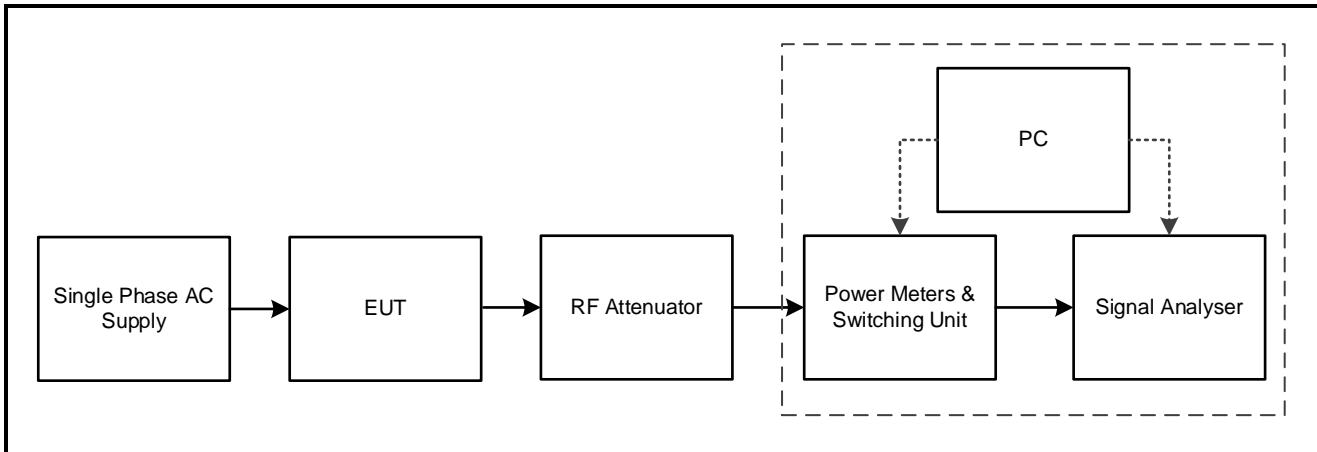
The EUT was tested in the following operating mode(s):

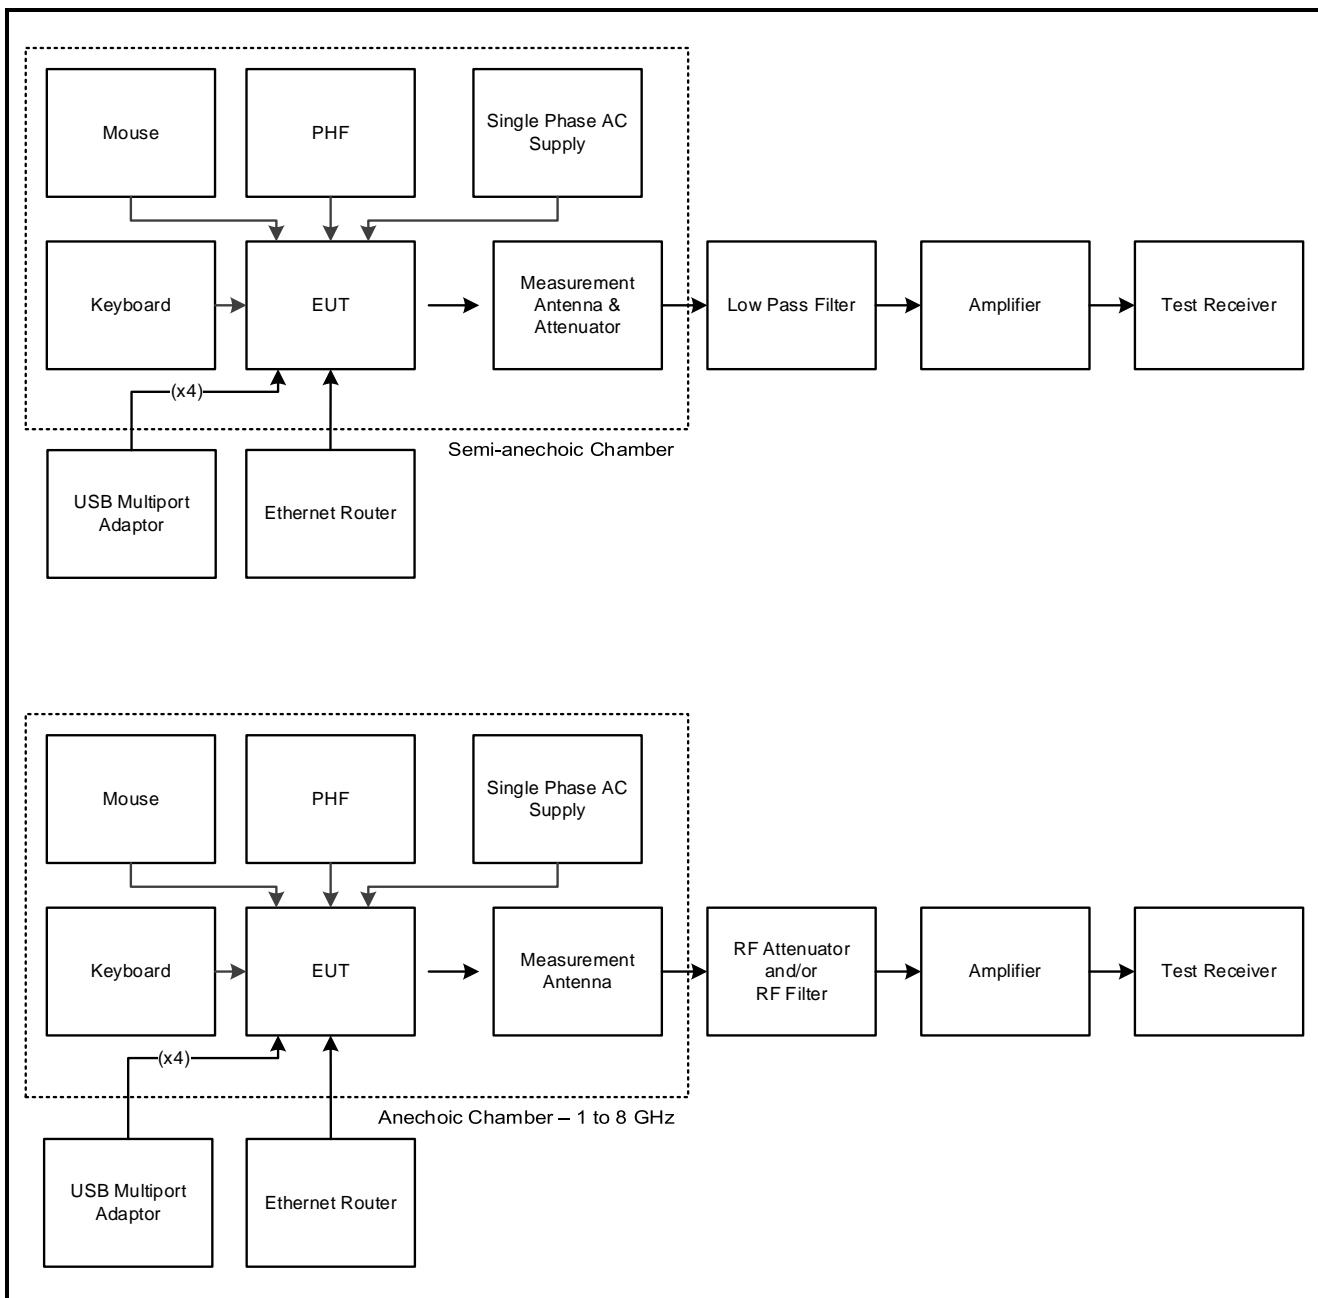
- Continuously transmitting with a modulated carrier at maximum power on the bottom, middle and top channels as required using the supported data rates/modulation types.

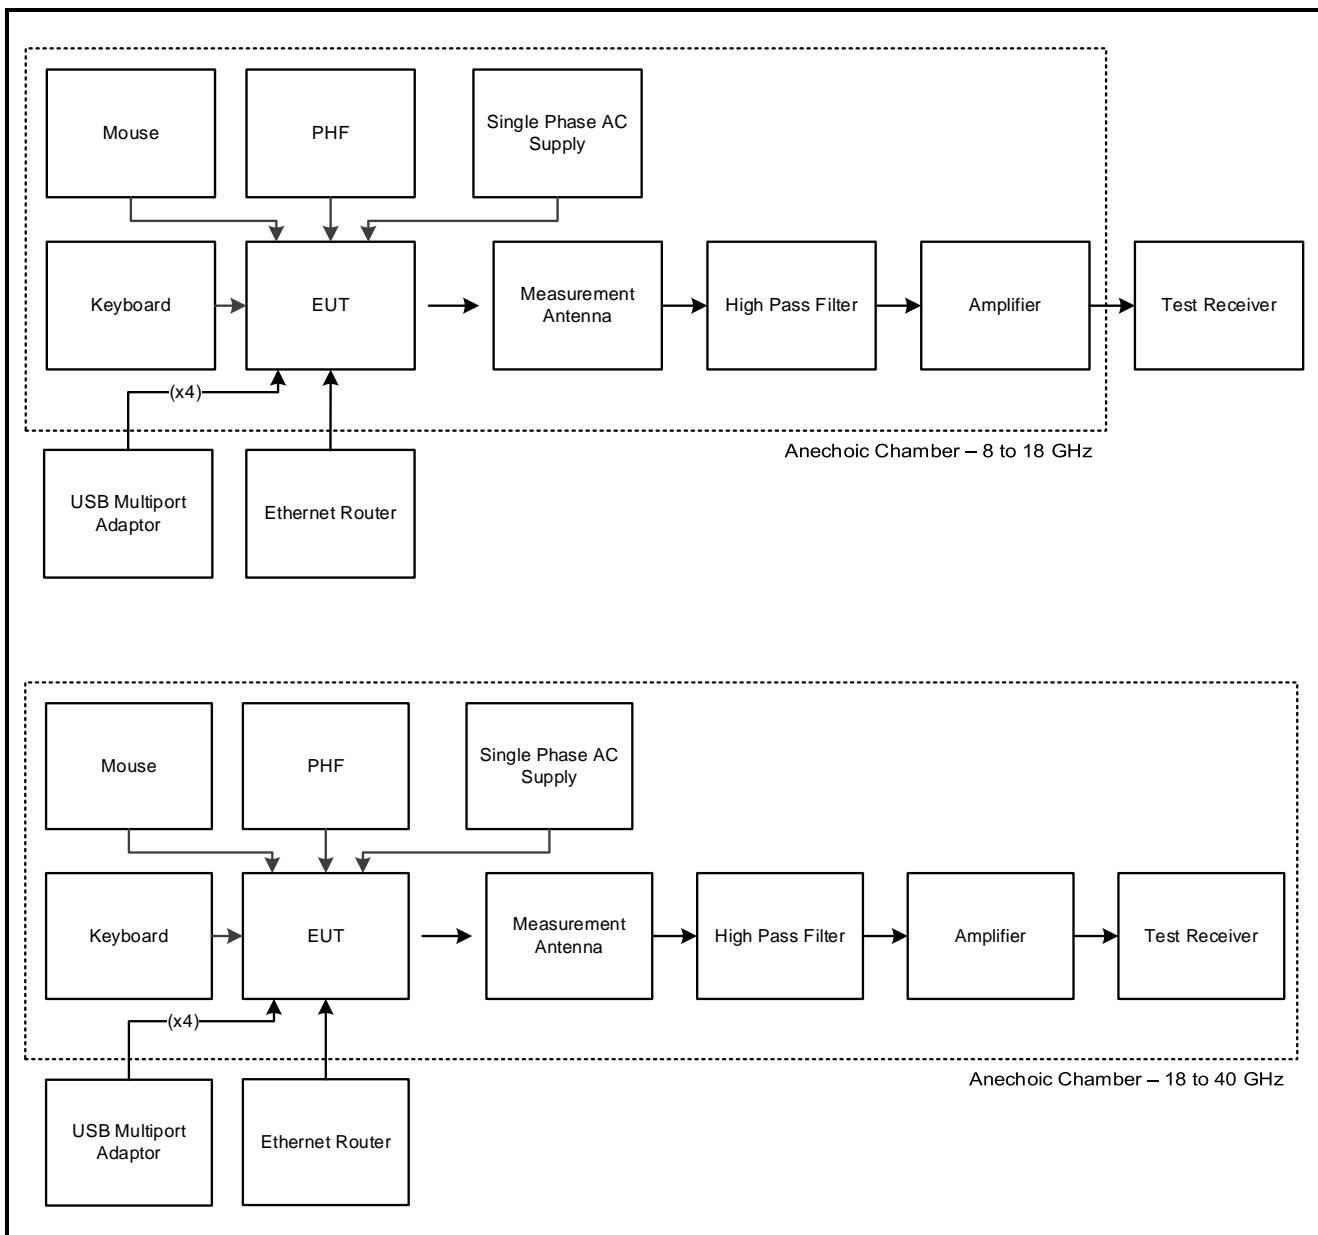
Configuration and Peripherals

The EUT was tested in the following configuration(s):

- Controlled in test mode using a software application on the EUT supplied by the customer. The application was used to enable a continuous transmission and to select the test channels as required. The customer supplied scripts 'MAC_WIFI.sh' to control the EUT.
- The customer requested the following data rates to be used for all measurements.
 - 802.11a SISO - BPSK / 6 Mbps / Core 2
 - 802.11n HT20 / SISO – BPSK / MCS0 / Core 2
 - 802.11n HT40 / SISO – BPSK / MCS0 / Core 2
 - 802.11ac VHT80 / SISO – BPSK / MCS0 / Core 2
- The customer supplied U.FL RF cables with the EUT in order to perform conducted measurements. The measured additional path loss was included in any path loss calculations.
- Transmitter spurious emissions were performed with the EUT transmitting with a data rate of 802.11a / 6 Mbps.
- Transmitter radiated spurious emissions tests were performed with the USB Keyboard, USB Mouse and PHF connected to the EUT. The remaining USB ports were connected with a USB cable to a hub. The USB-C ports were connected via a USB C-A adaptor and USB cable to a hub. The ethernet port was terminated into a router. The router and hub were placed under the floor inside the chamber.
- The EUT was powered from a 120 VAC 60 Hz single phase mains supply.

Test Setup Diagrams**Conducted Tests:****Test Setup for Transmitter Conducted Tests**

Test Setup Diagrams (continued)**Radiated Tests:****Test Setup for Transmitter Radiated Emissions**

Test Setup Diagrams (continued)**Test Setup for Transmitter Radiated Emissions (continued)**

4. Antenna Port Test Results

4.1. Transmitter Duty Cycle

Test Summary:

Test Engineer:	Max Passell	Test Date:	07 November 2018
Test Sample Serial Number:	C02X2007KFLX		

FCC Reference:	Part 15.35(c)
Test Method Used:	KDB 789033 D02 Section II.B.2.b)

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	50

Note(s):

1. In order to assist with the determination of the average level of fundamental and spurious emissions field strength, measurements were made of duty cycle to determine the transmission duration and the silent period time of the transmitter. The transmitter duty cycle was measured using a spectrum analyser in the time domain and calculated by using the following calculation:

$$10 \log 1 / (\text{On Time} / [\text{Period or } 100\text{ms whichever is the lesser}]).$$

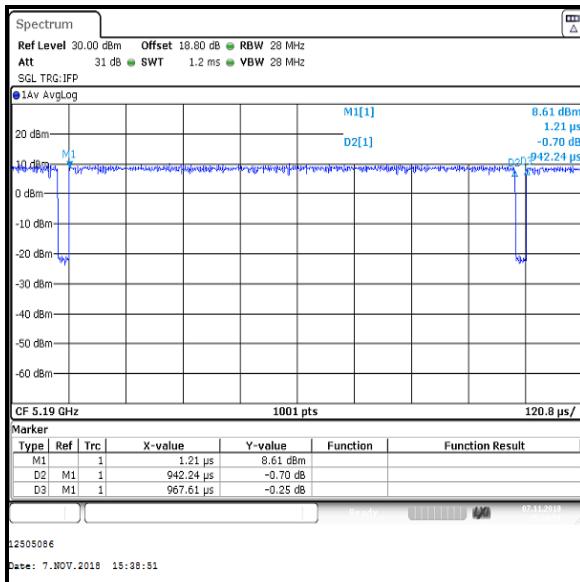
$$802.11n \text{ HT40 / SISO / MCS0 duty cycle: } 10 \log (1 / (0.9422/0.9676)) = 0.1$$

$$802.11ac \text{ VHT80 / SISO / MCS0 duty cycle: } 10 \log (1 / (0.4589/0.4830)) = 0.2$$

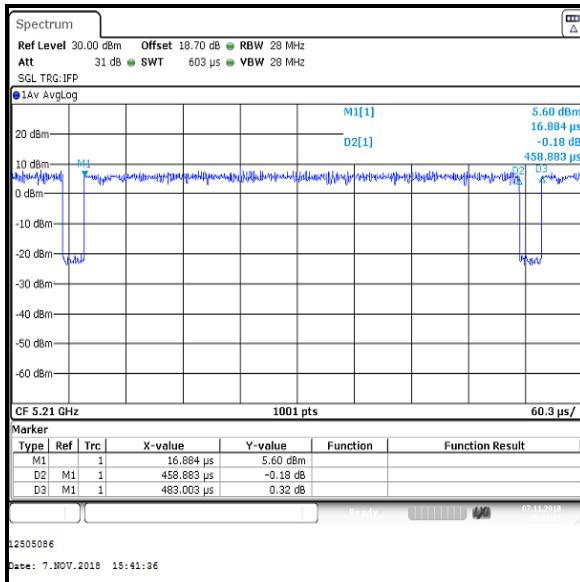
2. Plots below are for data rates with a duty cycle less than 98%. Results for all other modes having a duty cycle >98% are archived on the UL VS LTD IT server and available for inspection if required.
3. The signal analyser was connected to the RF port on the EUT using an RF switch, suitable attenuation and RF cables. An RF level offset was entered on the signal analyser to compensate for the loss of the switch, attenuator and RF cables.

Transmitter Duty Cycle (continued)**Results: 802.11n / 40 MHz / SISO / MCS0**

Pulse Duration (ms)	Period (ms)	Duty Cycle (dB)
0.9422	0.9676	0.1

**Results: 802.11ac / 80 MHz / SISO / MCS0x1**

Pulse Duration (ms)	Period (ms)	Duty Cycle (dB)
0.4589	0.4830	0.2



4.2. Transmitter 26 dB Emission Bandwidth

Test Summary:

Test Engineer:	Max Passell	Test Date:	07 November 2018
Test Sample Serial Number:	C02X2007KFLX		

FCC Reference:	Part 15.403(i)
Test Method Used:	KDB 789033 D02 Section II.C.1.

Environmental Conditions:

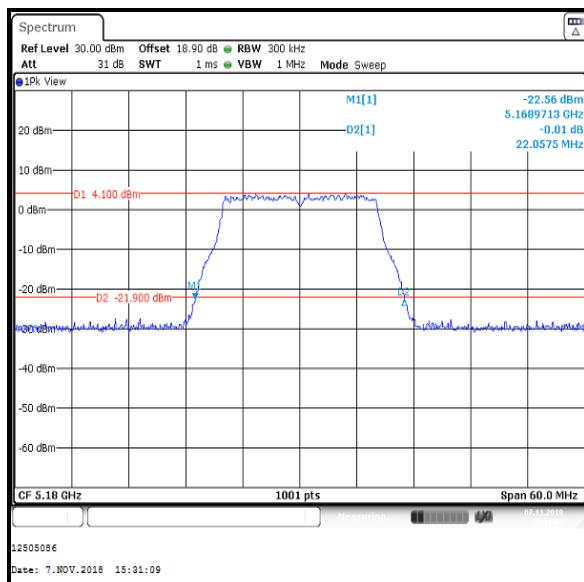
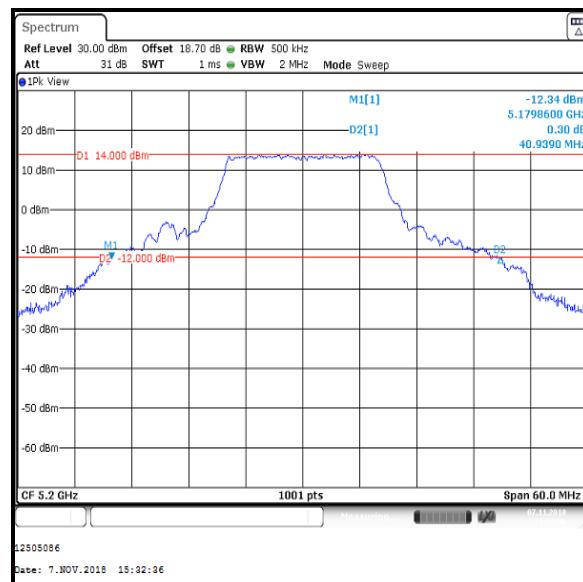
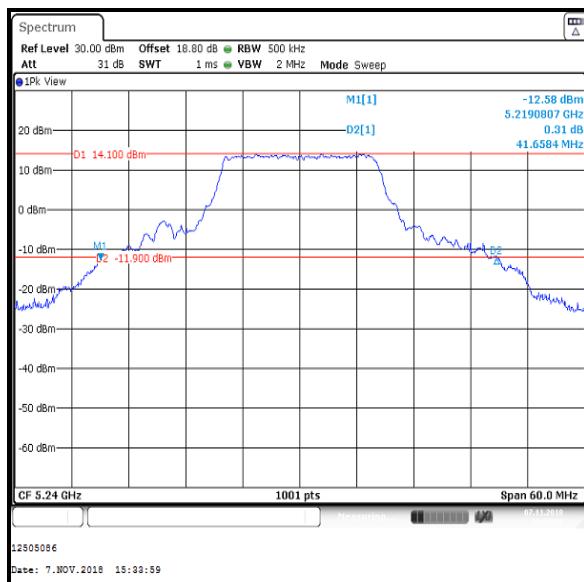
Temperatures (°C):	23
Relative Humidity (%):	50

Note(s):

1. Measurements were performed on data rates detailed in Section 3.5 on the relevant channels.
2. The signal analyser's resolution bandwidth was set to approximately 1% of the measured 26 dB emission bandwidth.
3. The signal analyser was connected to the RF port on the EUT using an RF switch, suitable attenuation and RF cables. An RF level offset was entered on the signal analyser to compensate for the loss of the switch, attenuator and RF cables.
4. For channels that straddle the U-NII-2C and U-NII-3 bands at 5725 MHz, emission bandwidth measurements were performed twice. Measurements of the entire 26 dB emission bandwidth that is contained on both U-NII-2C and U-NII-3 bands, were used for power measurements. Measurements on the emission's portion that is contained only within the U-NII-2C band, were used to calculate the conducted power limit on U-NII-2C tests. These are labelled as 'Reference plots'.

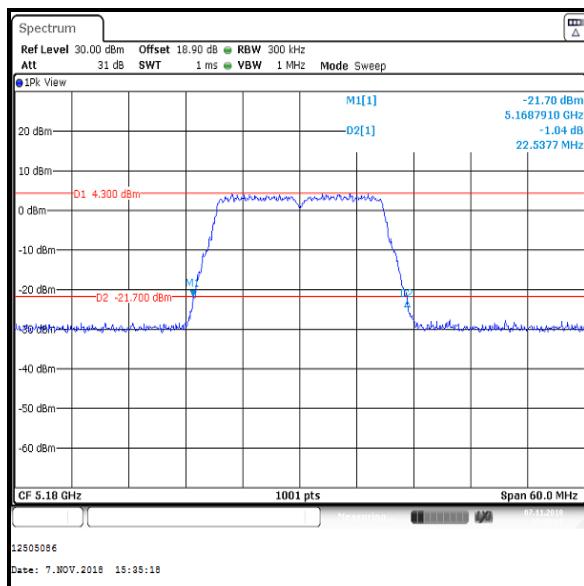
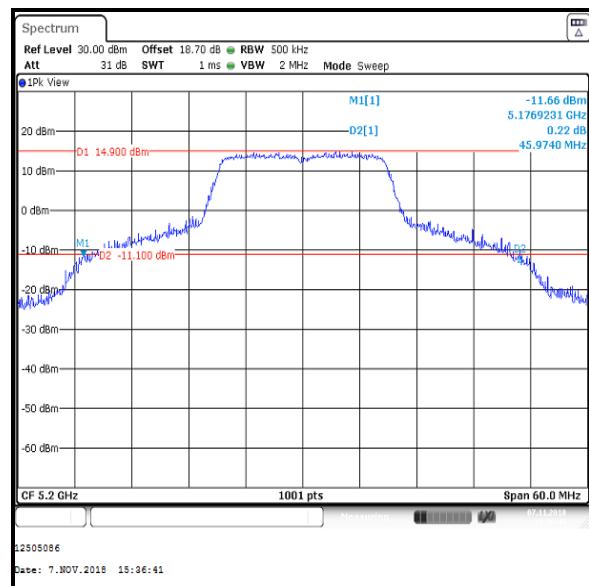
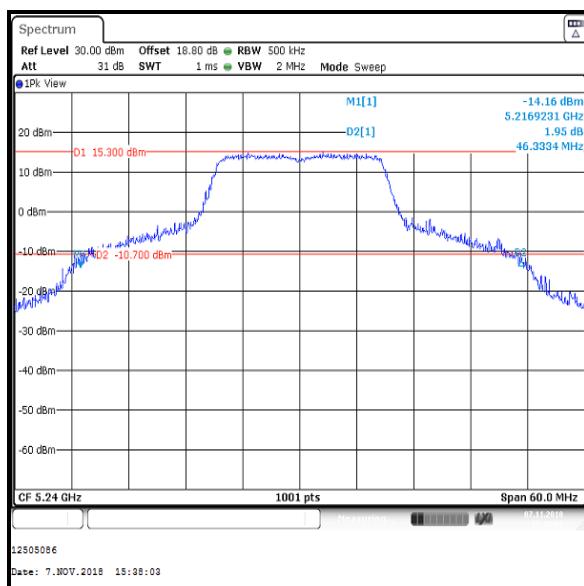
Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)**4.2.1. 5.15-5.25 GHz band****Results: 802.11a / 20 MHz / SISO / BPSK / 6 Mbps / Core 2**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5180	22.058
Middle	5200	40.939
Top	5240	41.658

**Bottom Channel****Middle Channel****Top Channel**

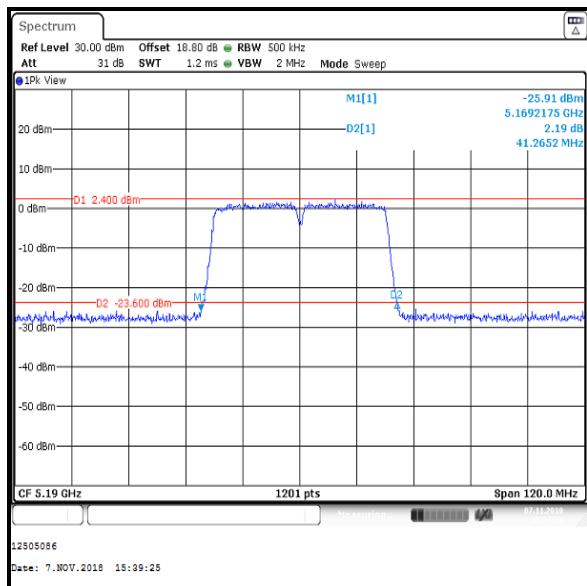
Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)**Results: 802.11n / 20 MHz / SISO / BPSK / MCS0 / Core 2**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5180	22.538
Middle	5200	45.974
Top	5240	46.333

**Bottom Channel****Middle Channel****Top Channel**

Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)**Results: 802.11n / 40 MHz / SISO / BPSK / MCS0 / Core 2**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5190	41.265
Top	5230	81.532



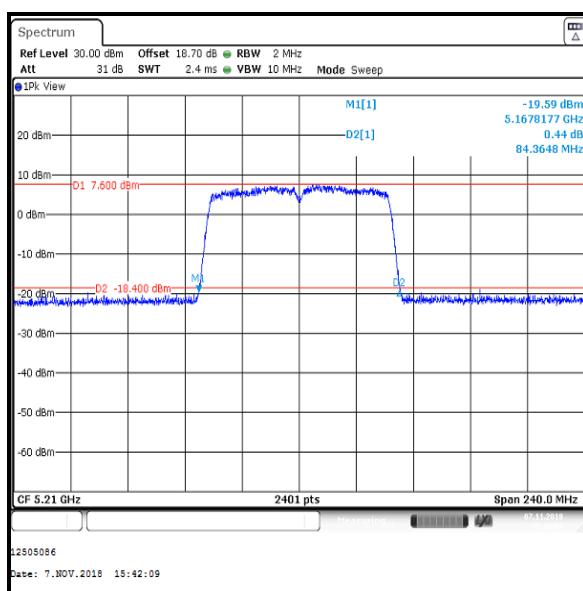
Bottom Channel



Top Channel

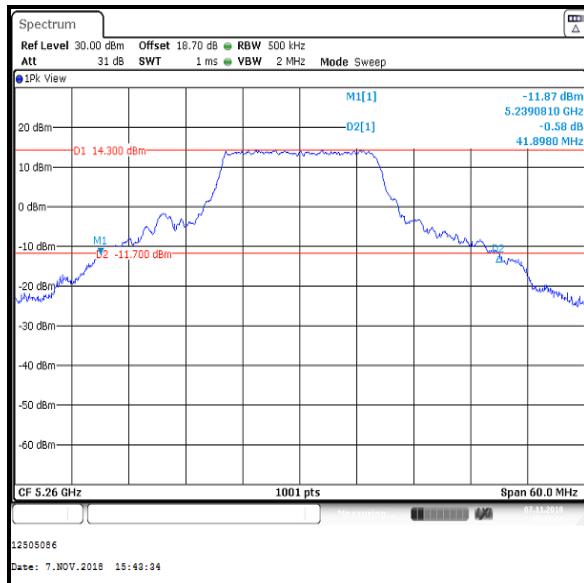
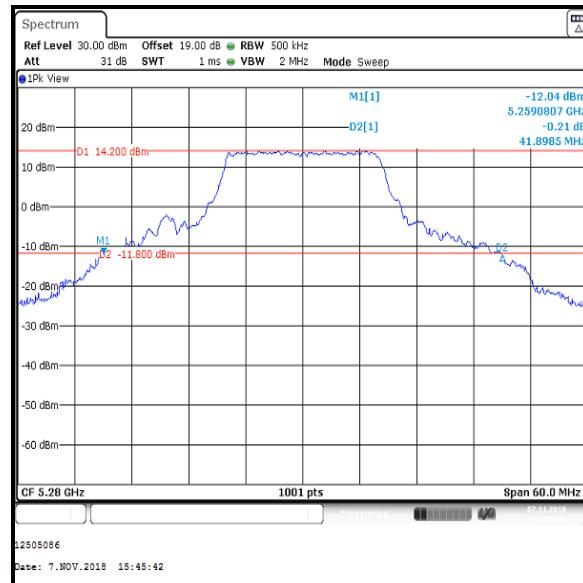
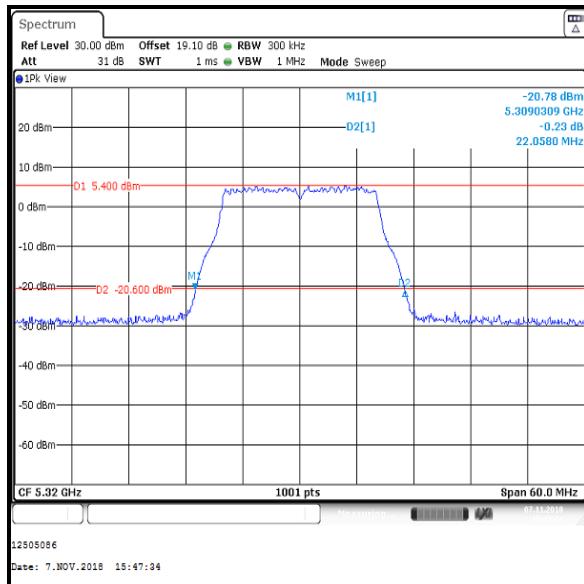
Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)**Results: 802.11ac / 80 MHz / SISO / BPSK / MCS0 / Core 2**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Single	5210	84.365

**Single Channel**

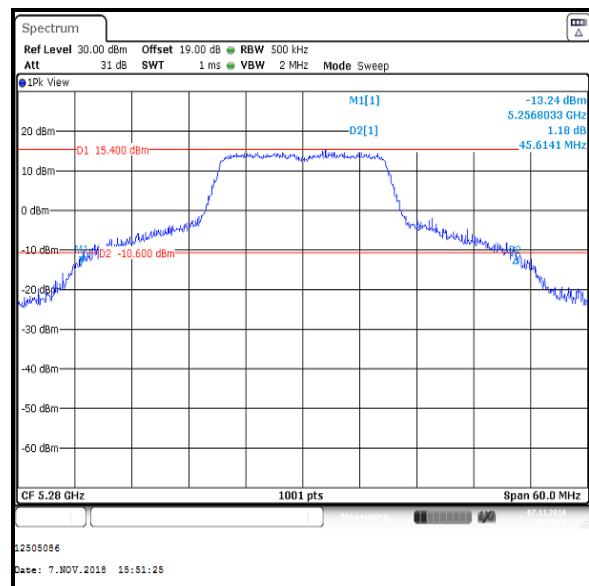
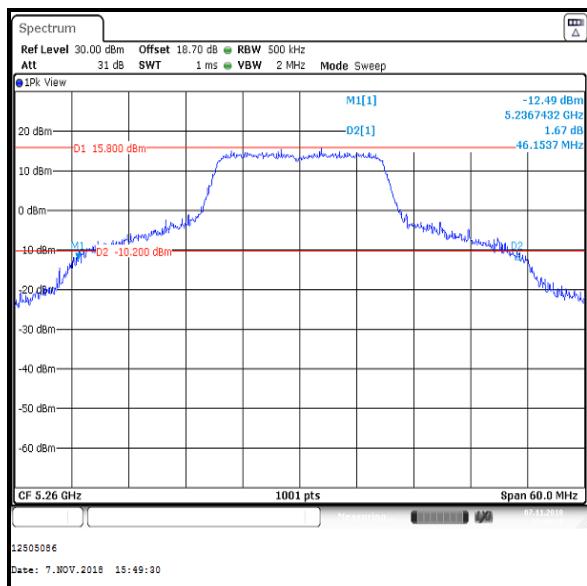
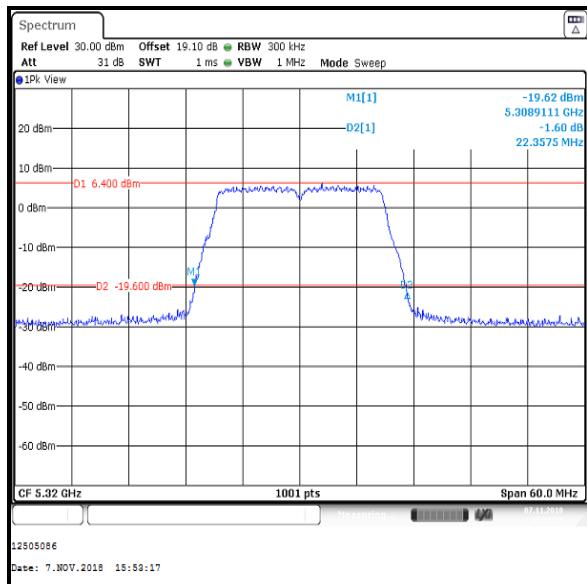
Transmitter 26 dB Emission Bandwidth (5.25-5.35 GHz band) (continued)**4.2.2. 5.25-5.35 GHz band****Results: 802.11a / 20 MHz / SISO / BPSK / 6 Mbps / Core 2**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5260	41.898
Middle	5280	41.899
Top	5320	22.058

**Bottom Channel****Middle Channel****Top Channel**

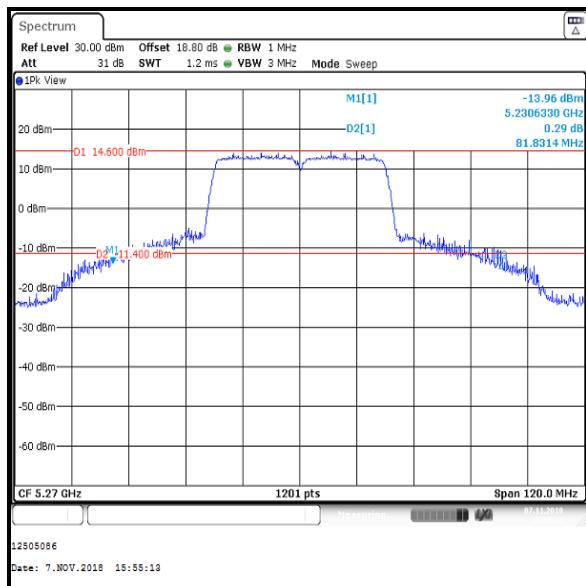
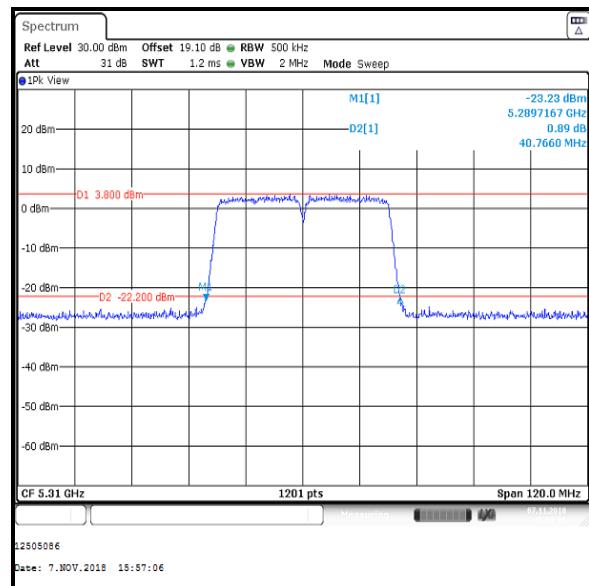
Transmitter 26 dB Emission Bandwidth (5.25-5.35 GHz band) (continued)**Results: 802.11n / 20 MHz / SISO / BPSK / MCS0 / Core 2**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5260	46.154
Middle	5280	45.614
Top	5320	22.358

**Bottom Channel****Middle Channel****Top Channel**

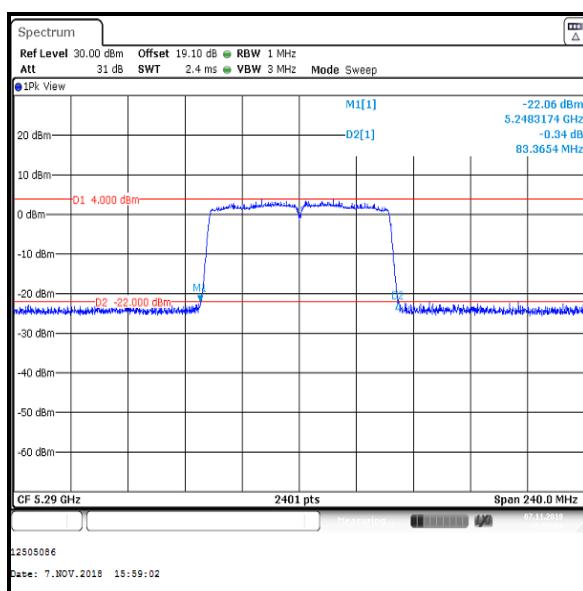
Transmitter 26 dB Emission Bandwidth (5.25-5.35 GHz band) (continued)**Results: 802.11n / 40 MHz / SISO / BPSK / MCS0 / Core 2**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5270	81.831
Top	5310	40.766

**Bottom Channel****Top Channel**

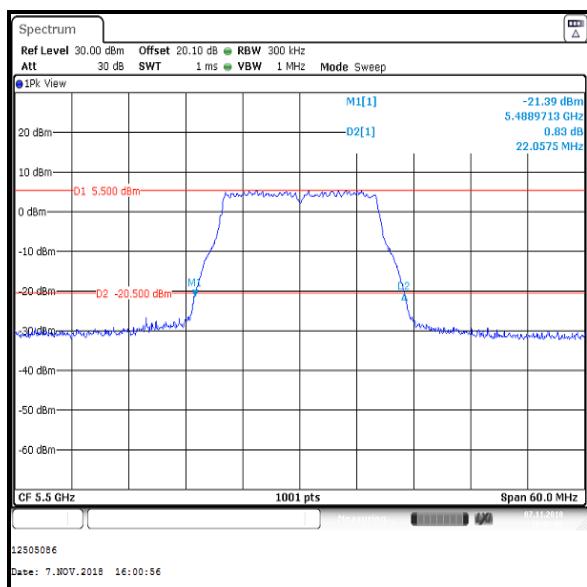
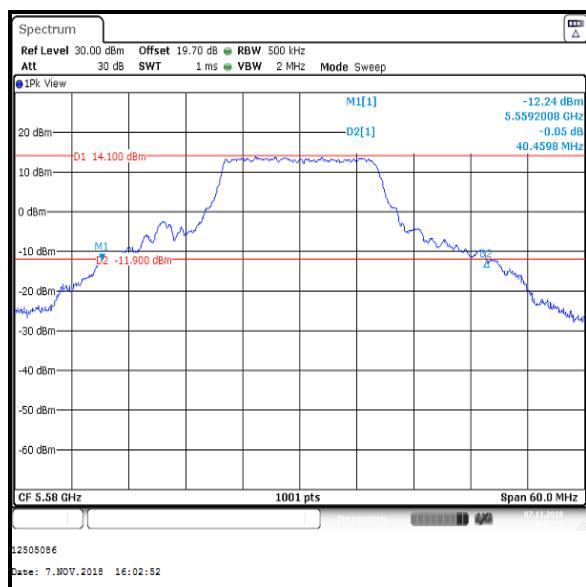
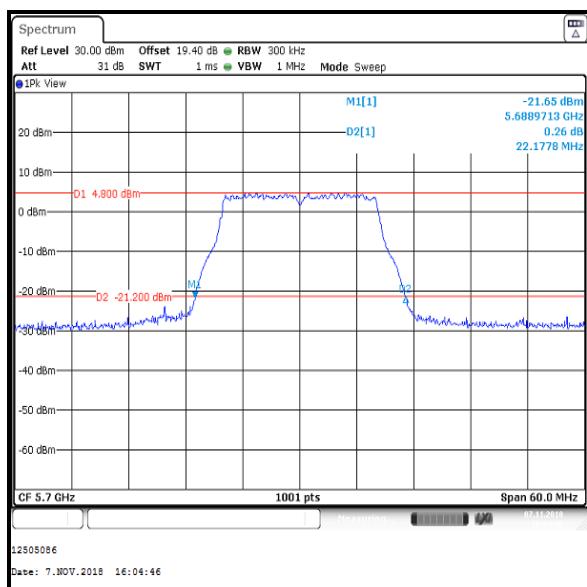
Transmitter 26 dB Emission Bandwidth (5.25-5.35 GHz band) (continued)**Results: 802.11ac / 80 MHz / SISO / BPSK / MCS0 / Core 2**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Single	5290	83.365

**Single Channel**

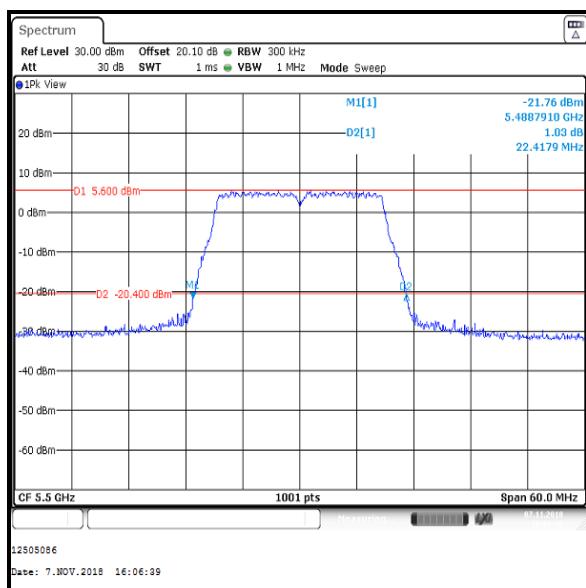
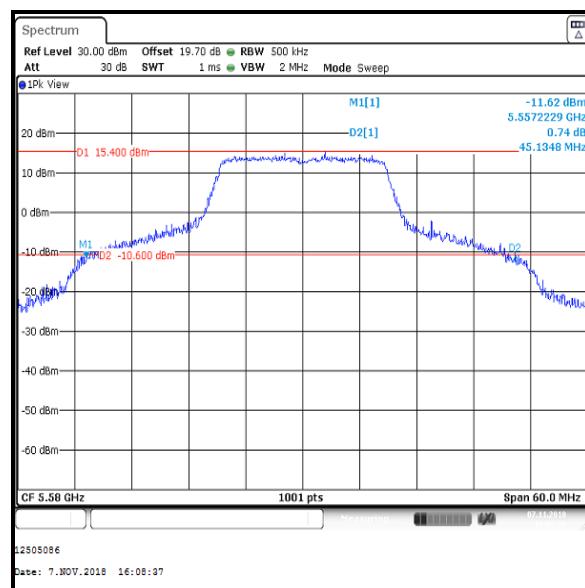
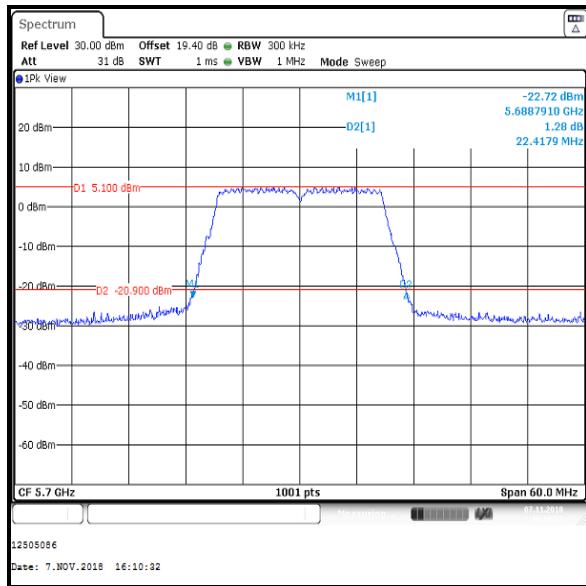
Transmitter 26 dB Emission Bandwidth (5.47-5.725 GHz band) (continued)**4.2.3. 5.47-5.725 GHz band****Results: 802.11a / 20 MHz / SISO / BPSK / 6 Mbps / Core 2**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5500	22.058
Middle	5580	40.460
Top	5700	22.178

**Bottom Channel****Middle Channel****Top Channel**

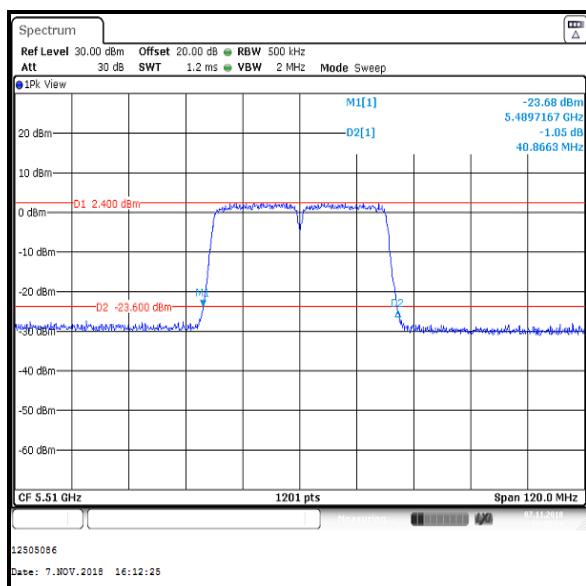
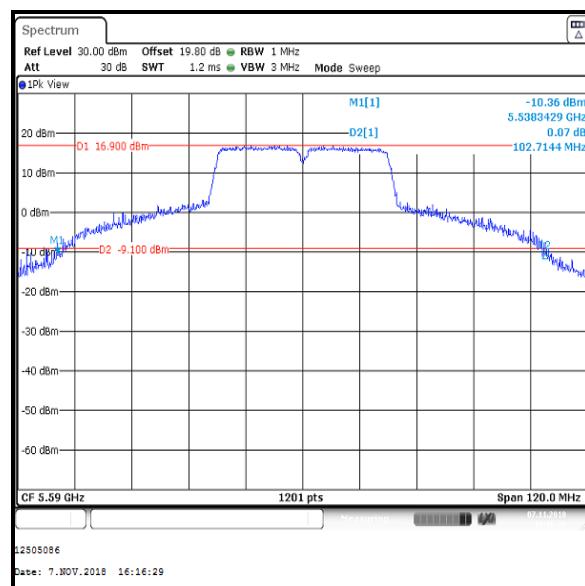
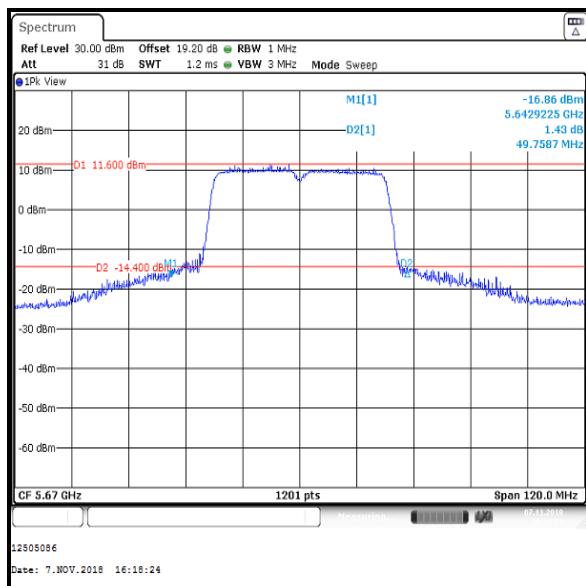
Transmitter 26 dB Emission Bandwidth (5.47-5.725 GHz band) (continued)**Results: 802.11n / 20 MHz / SISO / BPSK / MCS0 / Core 2**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5500	22.418
Middle	5580	45.135
Top	5700	22.418

**Bottom Channel****Middle Channel****Top Channel**

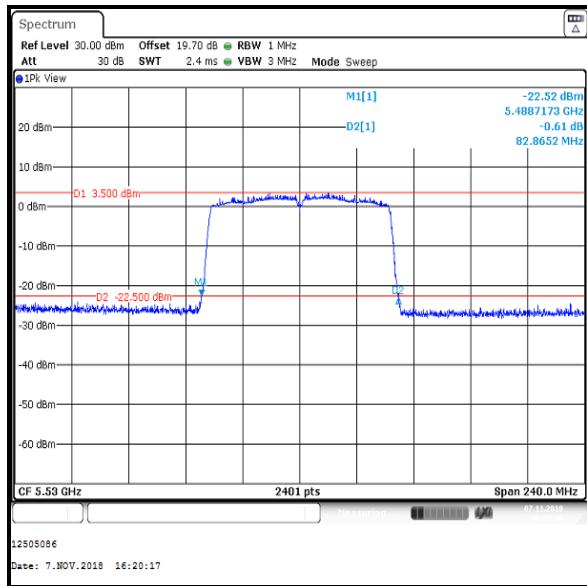
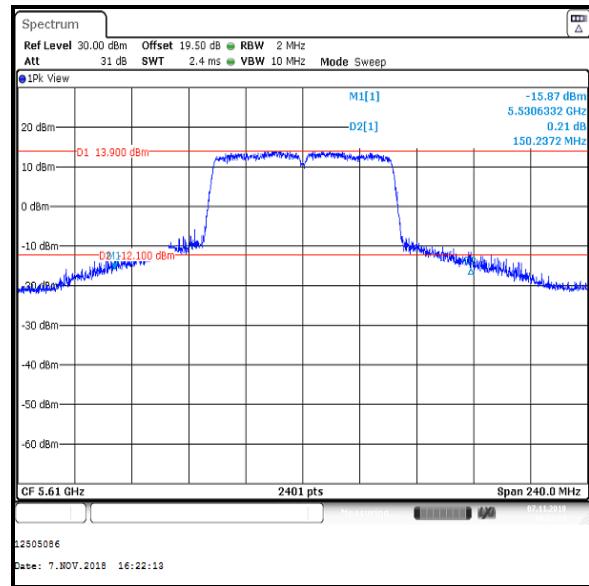
Transmitter 26 dB Emission Bandwidth (5.47-5.725 GHz band) (continued)**Results: 802.11n / 40 MHz / SISO / BPSK / MCS0 / Core 2**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5510	40.866
Middle	5590	102.714
Top	5670	49.759

**Bottom Channel****Middle Channel****Top Channel**

Transmitter 26 dB Emission Bandwidth (5.47-5.725 GHz band) (continued)**Results: 802.11ac / 80 MHz / SISO / BPSK / MCS0 / Core 2**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5530	82.865
Top	5610	150.237

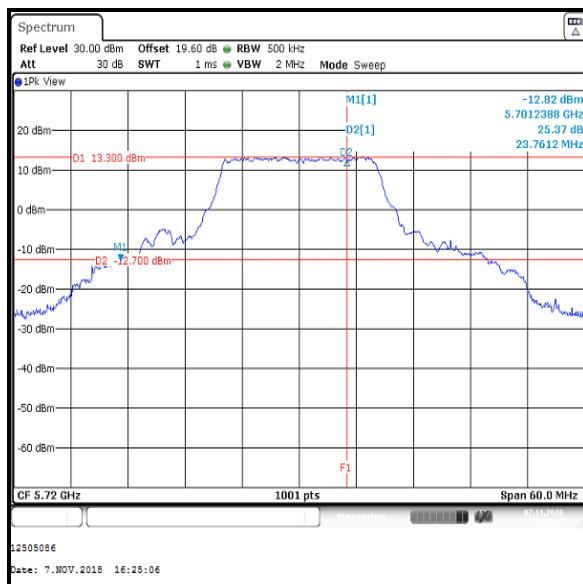
**Bottom Channel****Top Channel**

Transmitter 26 dB Emission Bandwidth (Straddle Channels) (continued)**4.2.4. Channels that straddle the U-NII-2C and U-NII-3 bands****Results: 802.11a / 20 MHz / SISO / BPSK / 6 Mbps / Core 2**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Single	5720	38.541

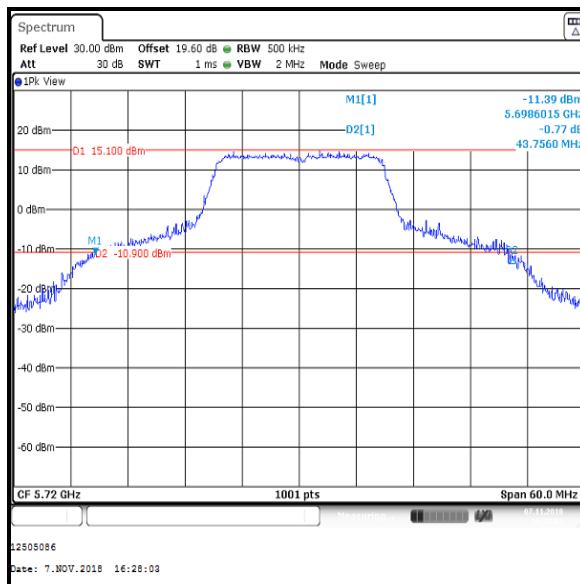
**Single Channel****Results: Reference Plots / 802.11a / 20 MHz / SISO / BPSK / 6 Mbps / Core 2**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Single	5720	23.761

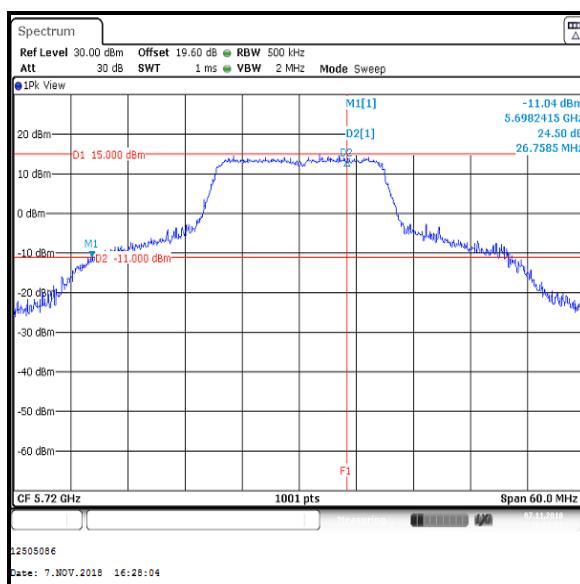
**Single Channel**

Transmitter 26 dB Emission Bandwidth (Straddle Channels) (continued)**Results: 802.11n / 20 MHz / SISO / BPSK / MCS0 / Core 2**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Single	5720	43.756

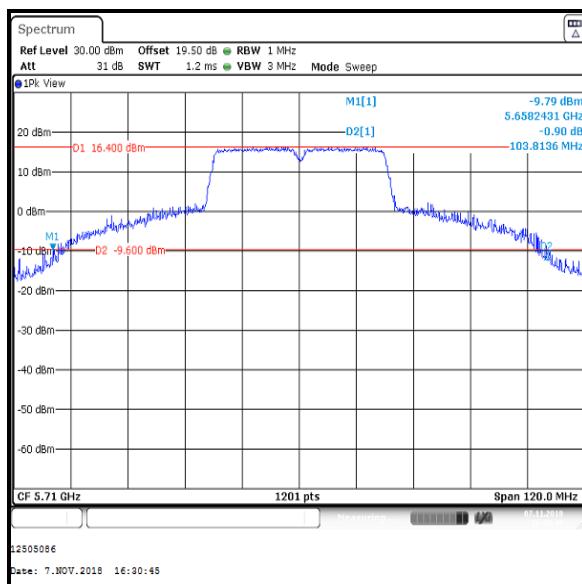
**Single Channel****Results: Reference Plots / 802.11n / 20 MHz / SISO / BPSK / MCS0 / Core 2**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Single	5720	26.759

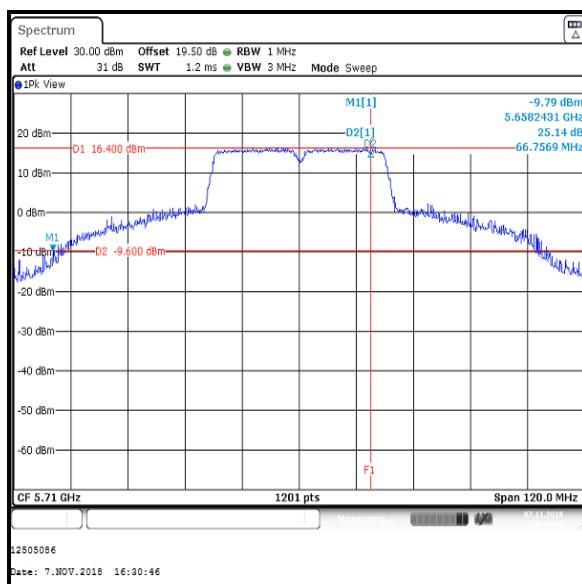
**Single Channel**

Transmitter 26 dB Emission Bandwidth (Straddle Channels) (continued)**Results: 802.11n / 40 MHz / SISO / BPSK / MCS0 / Core 2**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Single	5710	103.814

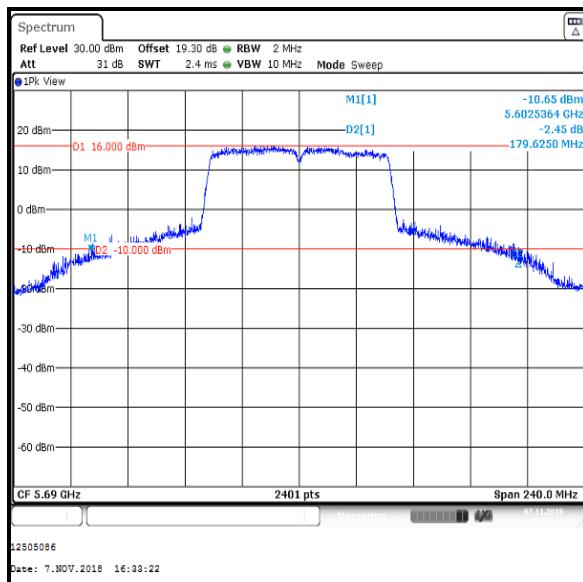
**Single Channel****Results: Reference Plots / 802.11n / 40 MHz / SISO / BPSK / MCS0 / Core 2**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Single	5710	66.757

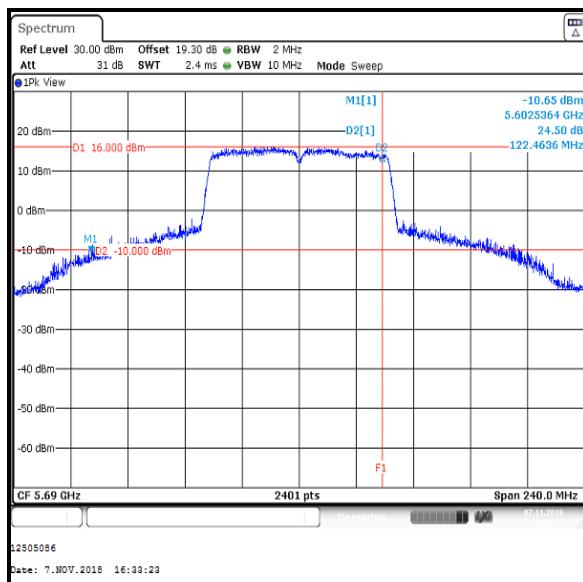
**Single Channel**

Transmitter 26 dB Emission Bandwidth (Straddle Channels) (continued)**Results: 802.11ac / 80 MHz / SISO / BPSK / MCS0 / Core 2**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Single	5690	179.625

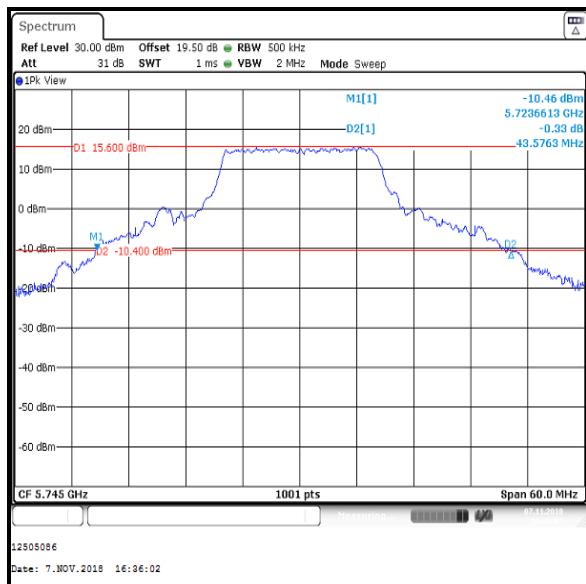
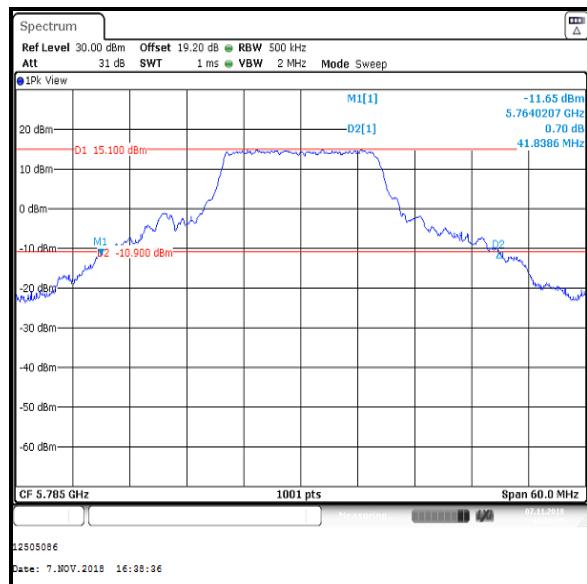
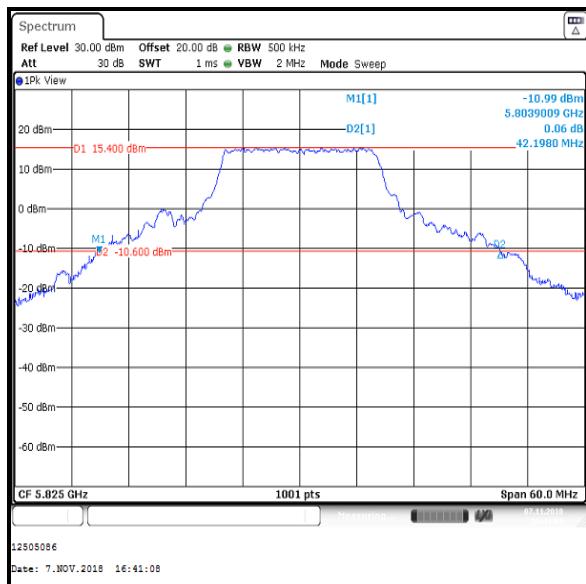
**Single Channel****Results: Reference Plots / 802.11ac / 80 MHz / SISO / BPSK / MCS0 / Core 2**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Single	5690	122.464

**Single Channel**

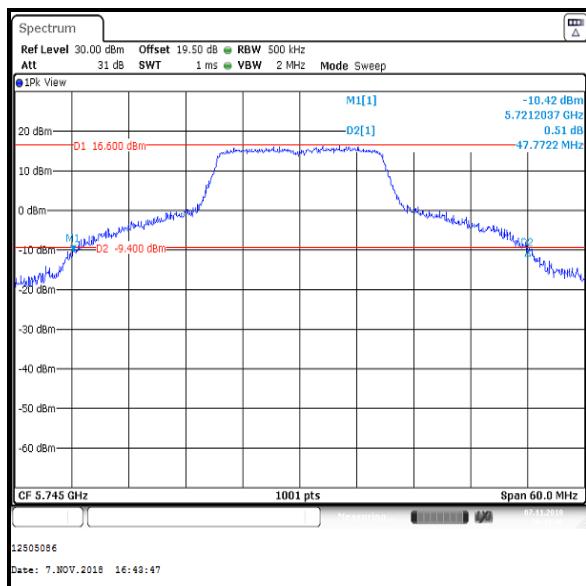
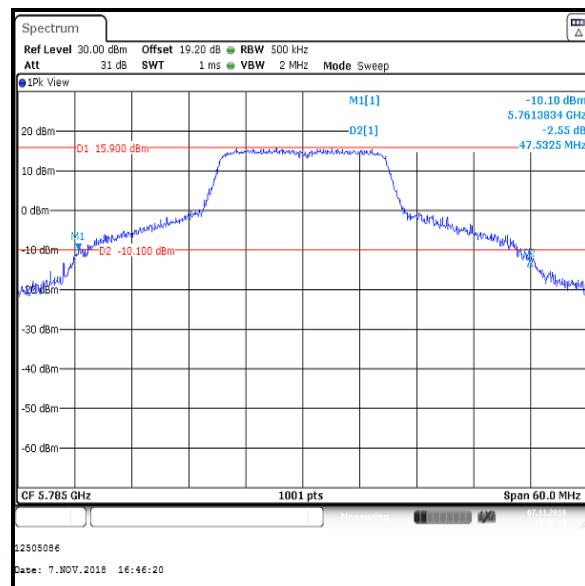
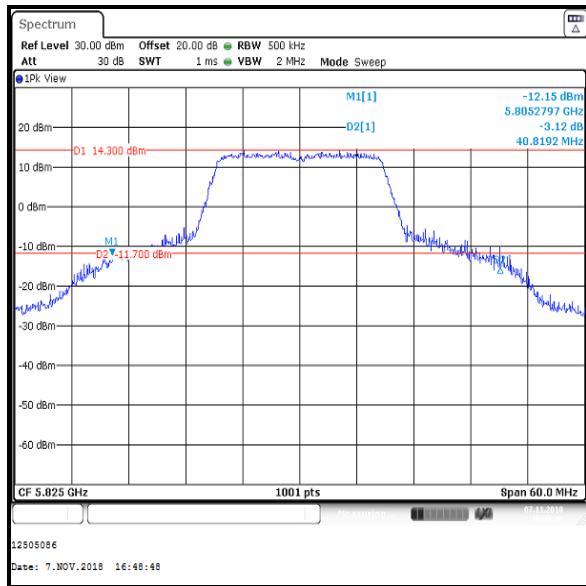
Transmitter 26 dB Emission Bandwidth (5.725-5.85 GHz band) (continued)**4.2.5. 5.725-5.85 GHz band****Results: 802.11a / 20 MHz / SISO / BPSK / 6 Mbps / Core 2**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5745	43.576
Middle	5785	41.839
Top	5825	42.198

**Bottom Channel****Middle Channel****Top Channel**

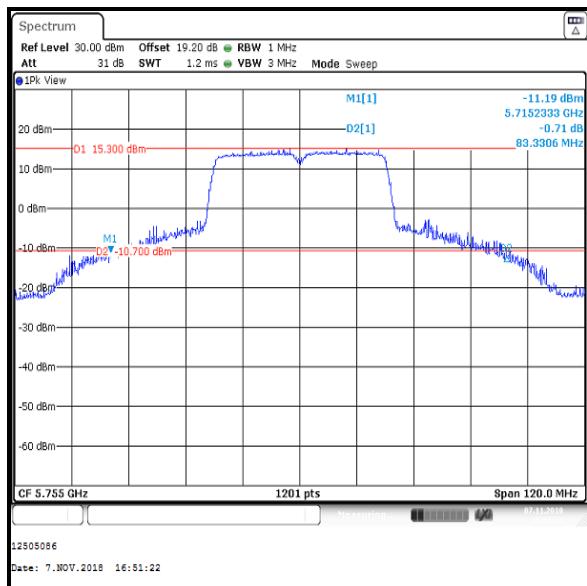
Transmitter 26 dB Emission Bandwidth (5.725-5.85 GHz band) (continued)**Results: 802.11n / 20 MHz / SISO / BPSK / MCS0 / Core 2**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5745	47.772
Middle	5785	47.533
Top	5825	40.819

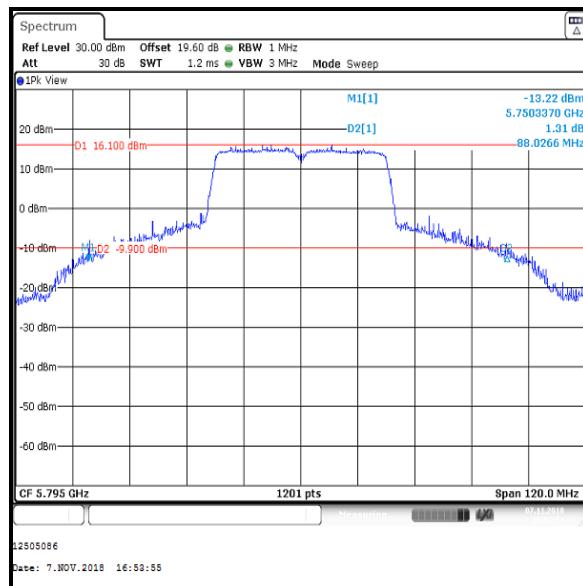
**Bottom Channel****Middle Channel****Top Channel**

Transmitter 26 dB Emission Bandwidth (5.725-5.85 GHz band) (continued)**Results: 802.11n / 40 MHz / SISO / BPSK / MCS0 / Core 2**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5755	83.331
Top	5795	88.027



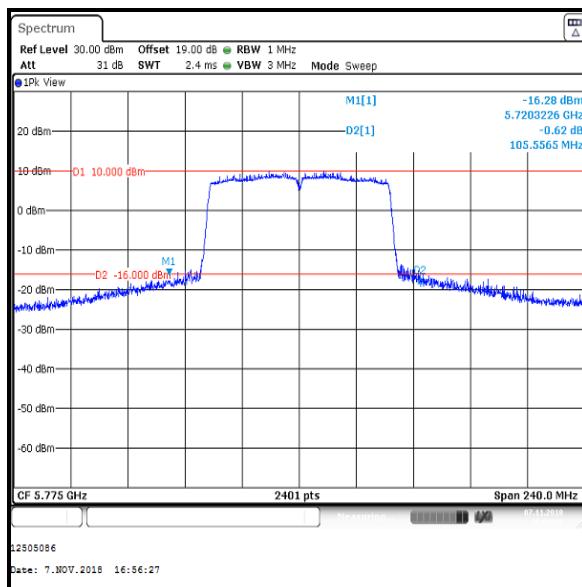
Bottom Channel



Top Channel

Transmitter 26 dB Emission Bandwidth (5.725-5.85 GHz band) (continued)**Results: 802.11ac / 80 MHz / SISO / BPSK / MCS0 / Core 2**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Single	5775	105.557

**Single Channel**

4.3. Transmitter Minimum 6 dB Bandwidth (5.725-5.85 GHz band)**Test Summary:**

Test Engineer:	Max Passell	Test Date:	07 November 2018
Test Sample Serial Number:	C02X2007KFLX		

FCC Reference:	Part 15.407(e)
Test Method Used:	KDB 789033 D02 Section II.C.2.

Environmental Conditions:

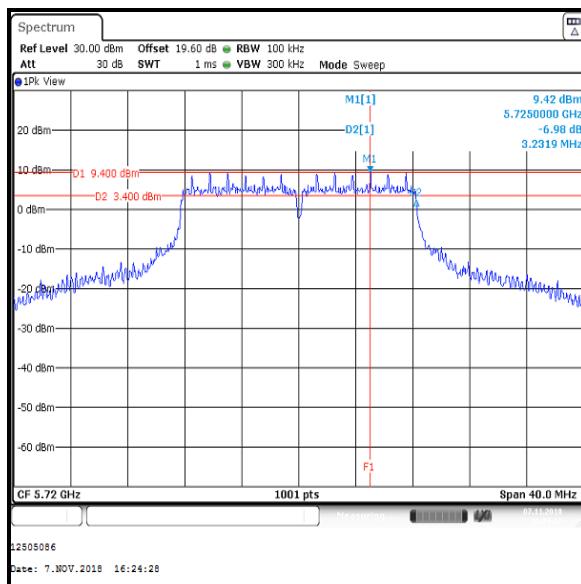
Temperature (°C):	23
Relative Humidity (%):	50

Note(s):

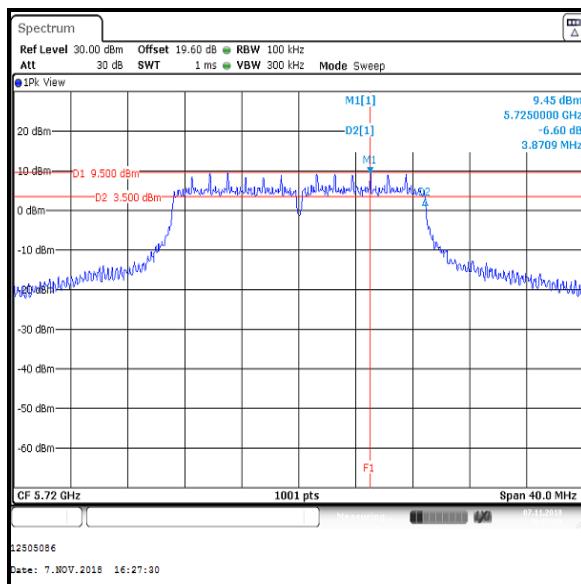
1. Measurements were performed on data rates detailed in Section 3.5 on the relevant channels.
2. For channels that straddle the U-NII-2C and U-NII-3 bands at 5725 MHz, measurements were performed on the portion of the emission that is contained within the U-NII-3 band.
3. The signal analyser was connected to the RF port on the EUT using an RF switch, suitable attenuation and RF cables. An RF level offset was entered on the signal analyser to compensate for the loss of the switch, attenuator and RF cables.

Transmitter Minimum 6 dB Bandwidth (Straddle Channels) (continued)**4.3.1. Channels that straddle the U-NII-2C and the U-NII-3 bands at 5.725 GHz****Results: 802.11a / 20 MHz / SISO / BPSK / 6 Mbps / Core 2**

Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Single	3232	≥500	2732	Complied

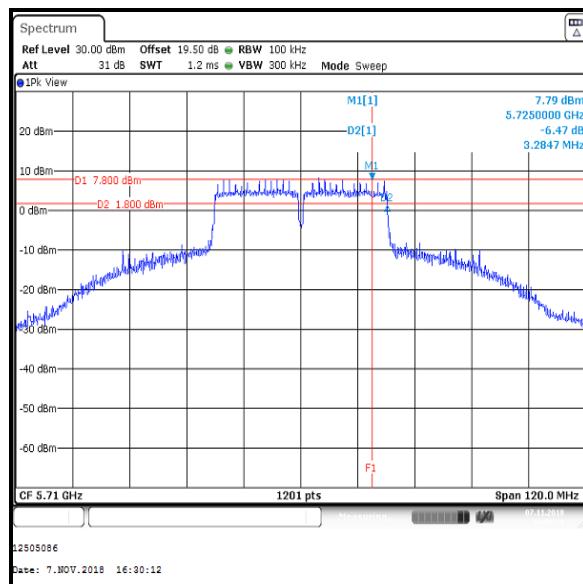
**Single Channel****Results: 802.11n / 20 MHz / SISO / BPSK / MCS0 / Core 2**

Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Single	3871	≥500	3371	Complied

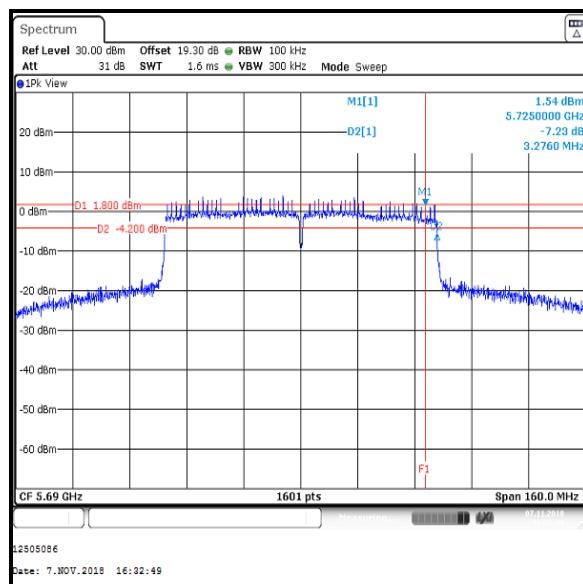
**Single Channel**

Transmitter Minimum 6 dB Bandwidth (Straddle Channels) (continued)**Results: 802.11n / 40 MHz / SISO / BPSK / MCS0 / Core 2**

Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Single	3285	≥500	2785	Complied

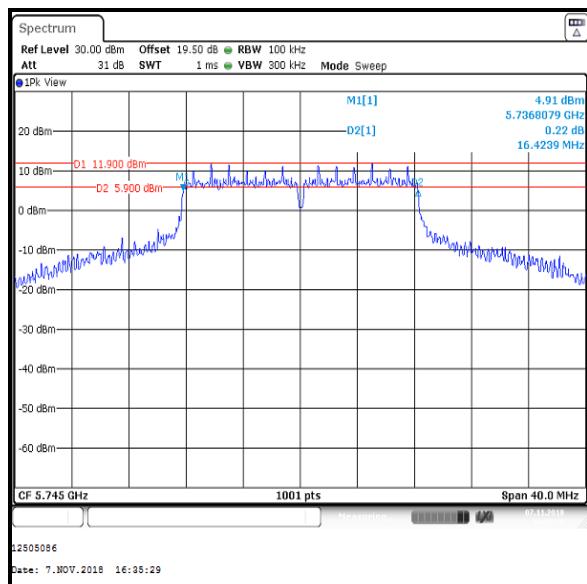
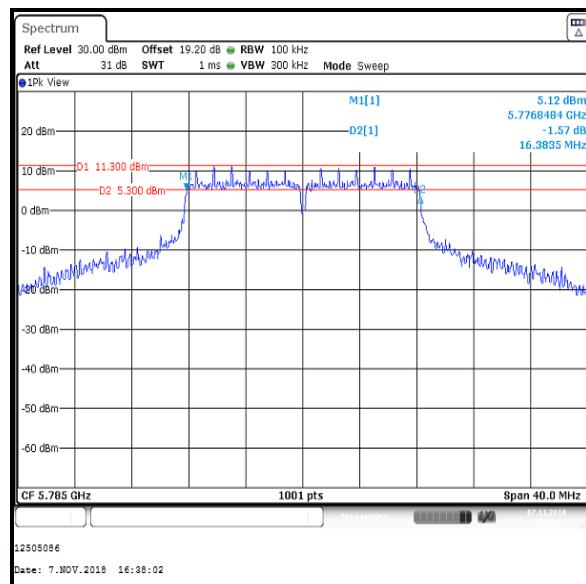
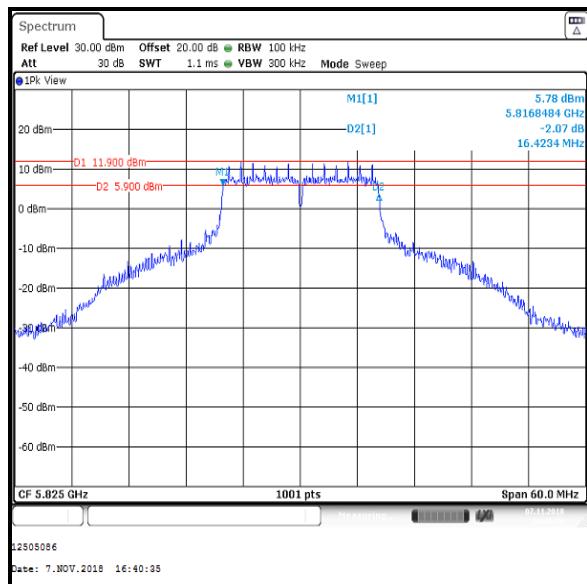
**Single Channel****Results: 802.11ac / 80 MHz / SISO / BPSK / MCS0 / Core 2**

Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Single	3276	≥500	2776	Complied

**Single Channel**

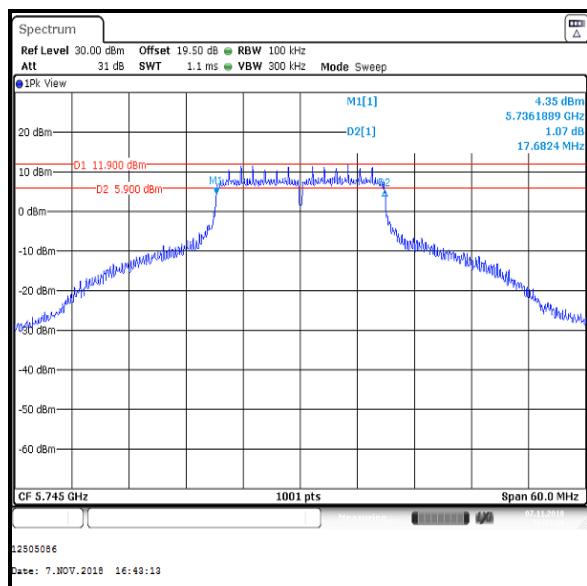
Transmitter Minimum 6 dB Bandwidth (5.725-5.85 GHz band) (continued)**4.3.2. 5.725-5.85 GHz band****Results: 802.11a / 20 MHz / SISO / BPSK / 6 Mbps / Core 2**

Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Bottom	16424	≥500	15924	Complied
Middle	16384	≥500	15884	Complied
Top	16423	≥500	15923	Complied

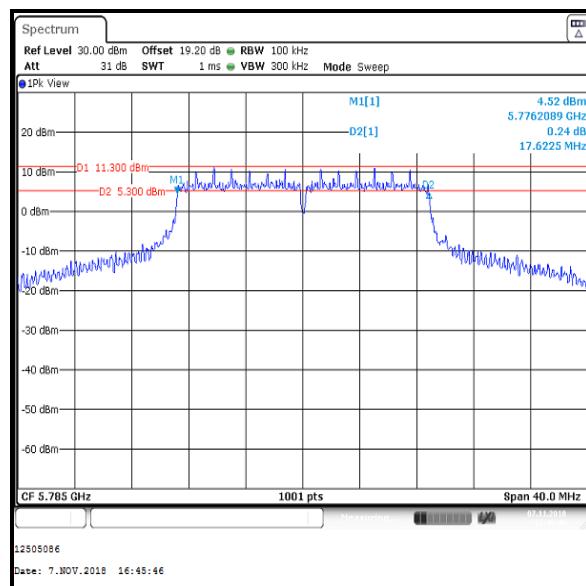
**Bottom Channel****Middle Channel****Top Channel**

Transmitter Minimum 6 dB Bandwidth (5.725-5.85 GHz band) (continued)**Results: 802.11n / 20 MHz / SISO / BPSK / MCS0 / Core 2**

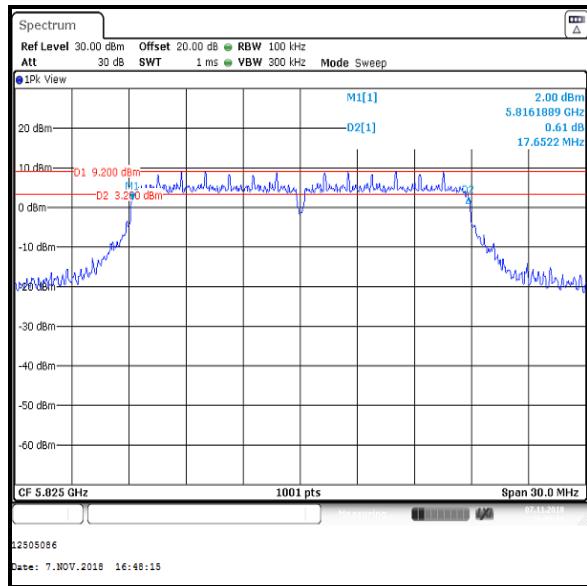
Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Bottom	17682	≥500	17182	Complied
Middle	17623	≥500	17123	Complied
Top	17652	≥500	17152	Complied



Bottom Channel



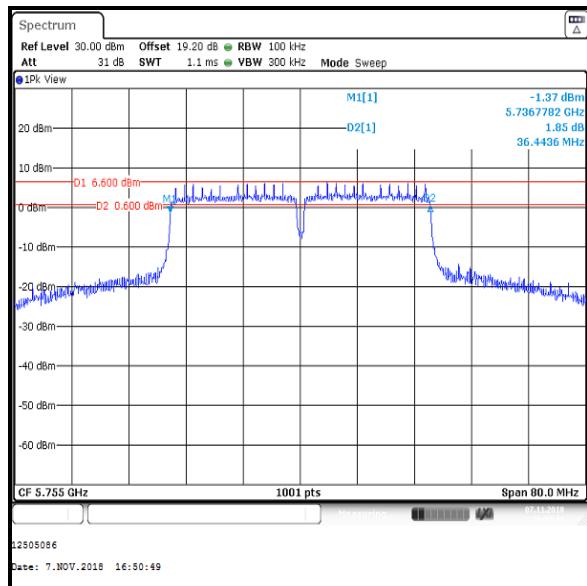
Middle Channel



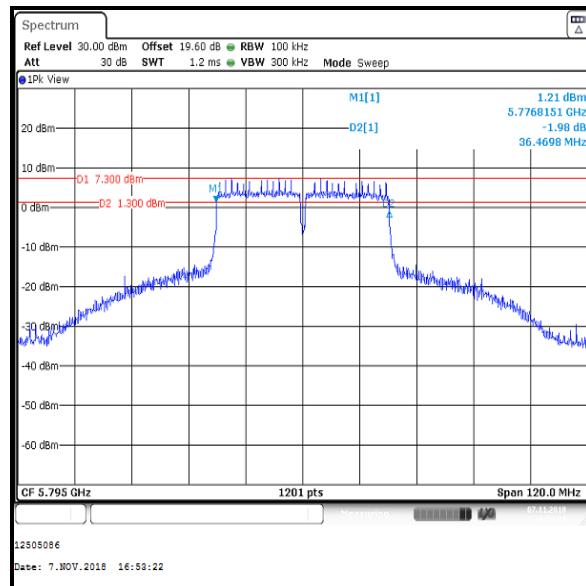
Top Channel

Transmitter Minimum 6 dB Bandwidth (5.725-5.85 GHz band) (continued)**Results: 802.11n / 40 MHz / SISO / BPSK / MCS0 / Core 2**

Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Bottom	36444	≥500	35944	Complied
Top	36470	≥500	35970	Complied



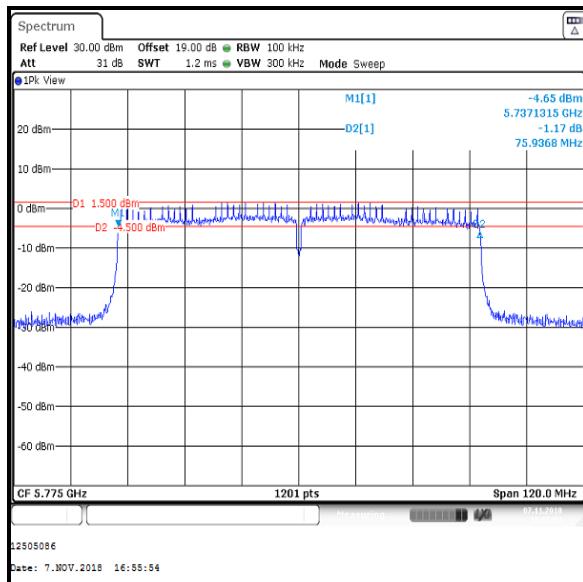
Bottom Channel



Top Channel

Transmitter Minimum 6 dB Bandwidth (5.725-5.85 GHz band) (continued)**Results: 802.11ac / 80 MHz / SISO / BPSK / MCS0 / Core 2**

Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Single	75937	≥500	75437	Complied

**Single Channel**

4.4. Transmitter Maximum Conducted Output Power

4.4.1. 5.15-5.25 GHz band

Test Summary:

Test Engineer:	Max Passell	Test Date:	07 November 2018
Test Sample Serial Number:	C02X2007KFLX		

FCC Reference:	Part 15.407(a)(1)(iv)
Test Method Used:	KDB 789033 D02 Section II.E.2.b) and II.E.2.d)

Environmental Conditions:

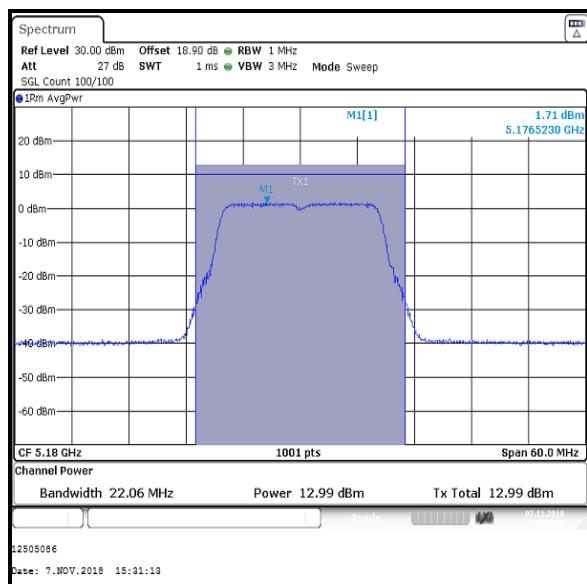
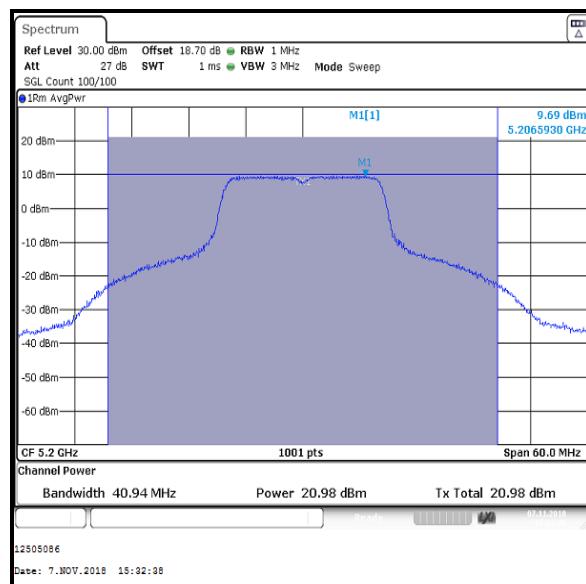
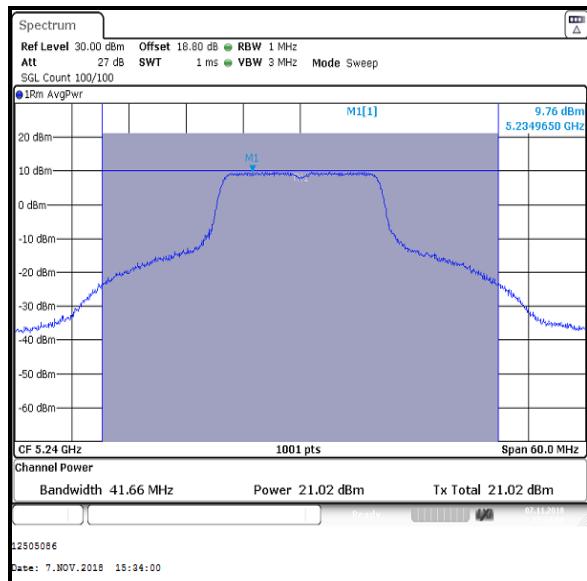
Temperature (°C):	23
Relative Humidity (%):	50

Note(s):

1. For conducted power tests where the duty cycle is >98%, the measurements were performed using a signal analyser in accordance with FCC KDB 789033 II.E.2.b) Method SA-1. Where the duty cycle is <98%, the measurements were performed in accordance with FCC KDB 789033 II.E.2.d) Method SA-2. The signal analyser's integration function was used to integrate across the 26 dB emission bandwidth. The resolution bandwidth was set to 1 MHz and video bandwidth 3 MHz. An RMS detector was used and sweep time was set to auto and 100 traces performed. The span was set to encompass the entire 26 dB emission bandwidth. The channel power results are recorded in the tables below.
2. Measurements were performed using configurations detailed in Section 3.5 of this test report on the relevant channels.
3. For data rates where the EUT was transmitting at <98% duty cycle, the calculated duty cycle in Section 4.1 was added to the measured power in order to compute the average power during the actual transmission time.
4. For all modes of operation, the antenna gain is < 6 dBi.
5. For details on antenna gains refer to Section 3.4 of this test report.
6. The Part 15.407(a)(1)(iv) limit shall not exceed 250 mW (24.0 dBm).
7. The signal analyser was connected to the RF port on the EUT using an RF switch, suitable attenuation and RF cable. An RF level offset was entered on the signal analyser to compensate for the loss of the attenuator and RF cable.

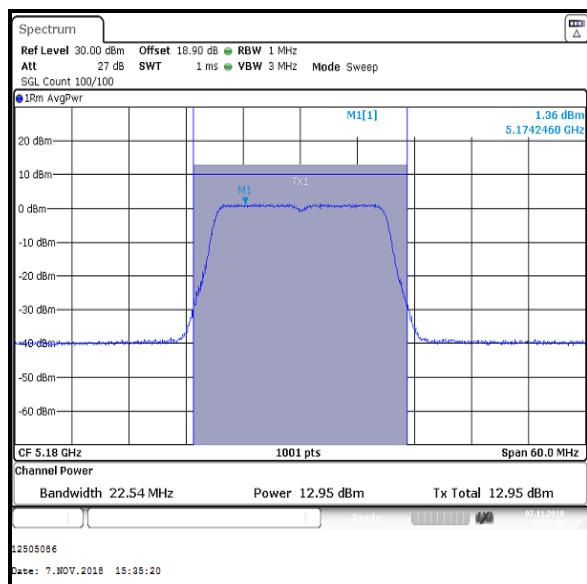
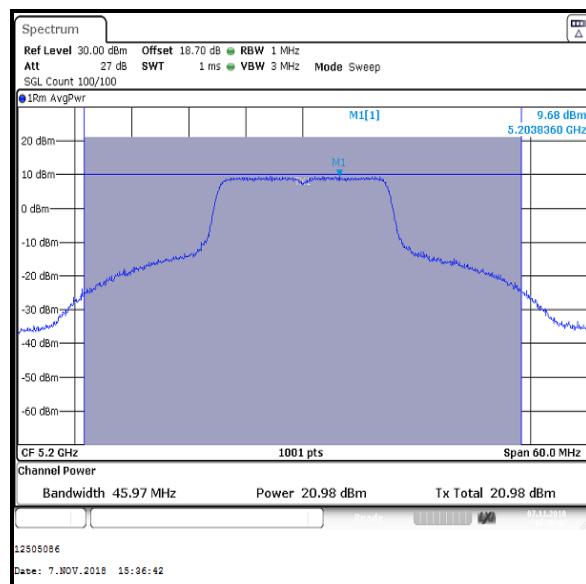
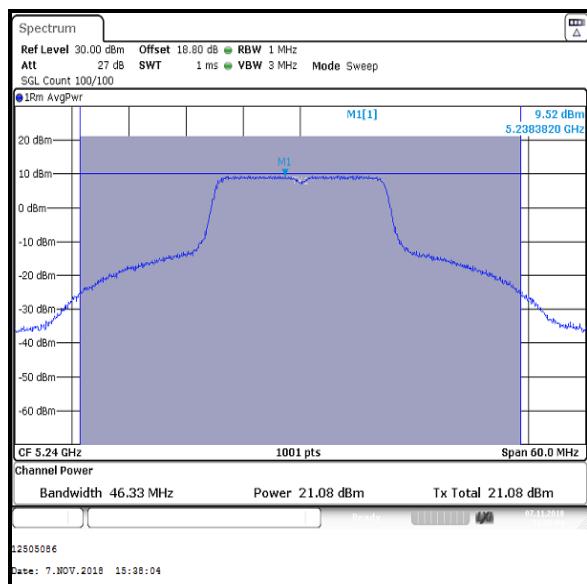
Transmitter Maximum Conducted Output Power (5.15-5.25 GHz band) (continued)**Results: 802.11a / 20 MHz / SISO / BPSK / 6 Mbps / Core 2**

Channel	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	5180	13.0	24.0	11.0	Complied
Middle	5200	21.0	24.0	3.0	Complied
Top	5240	21.0	24.0	3.0	Complied

**Bottom Channel****Middle Channel****Top Channel**

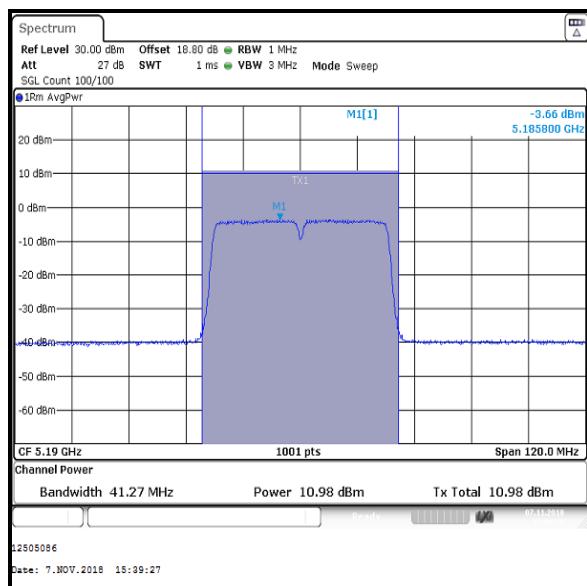
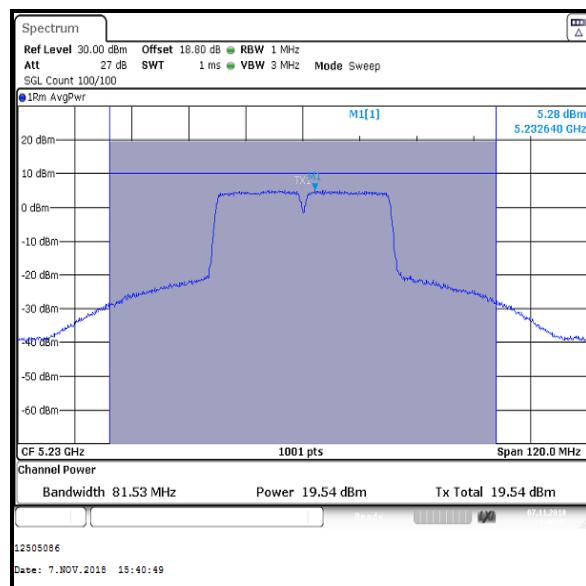
Transmitter Maximum Conducted Output Power (5.15-5.25 GHz band) (continued)**Results: 802.11n / 20 MHz / SISO / BPSK / MCS0 / Core 2**

Channel	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	5180	13.0	24.0	11.0	Complied
Middle	5200	21.0	24.0	3.0	Complied
Top	5240	21.1	24.0	2.9	Complied

**Bottom Channel****Middle Channel****Top Channel**

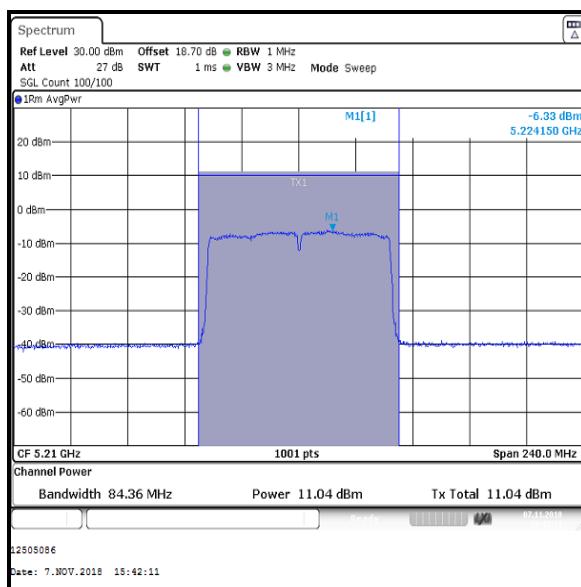
Transmitter Maximum Conducted Output Power (5.15-5.25 GHz band) (continued)**Results: 802.11n / 40 MHz / SISO / BPSK / MCS0 / Core 2**

Channel	Frequency (MHz)	Conducted Power (dBm)	Duty cycle correction factor (dB)	Corrected Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	5190	11.0	0.1	11.1	24.0	12.9	Complied
Top	5230	19.5	0.1	19.6	24.0	4.4	Complied

**Bottom Channel****Top Channel**

Transmitter Maximum Conducted Output Power (5.15-5.25 GHz band) (continued)**Results: 802.11ac / 80 MHz / SISO / BPSK / MCS0 / Core 2**

Channel	Frequency (MHz)	Conducted Power (dBm)	Duty cycle correction factor (dB)	Corrected Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Single	5210	11.0	0.2	11.2	24.0	12.8	Complied

**Single Channel**

Transmitter Maximum Conducted Output Power (5.25-5.35 GHz band)**4.4.2. 5.25-5.35 GHz band****Test Summary:**

Test Engineer:	Max Passell	Test Date:	07 November 2018
Test Sample Serial Number:	C02X2007KFLX		

FCC Reference:	Part 15.407(a)(2)
Test Method Used:	KDB 789033 D02 Section II.E.2.b) and II.E.2.d)

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	50

Note(s):

1. For conducted power tests where the duty cycle is >98%, the measurements were performed using a signal analyser in accordance with FCC KDB 789033 II.E.2.b) Method SA-1. Where the duty cycle is <98%, the measurements were performed in accordance with FCC KDB 789033 II.E.2.d) Method SA-2. The signal analyser's integration function was used to integrate across the 26 dB emission bandwidth. The resolution bandwidth was set to 1 MHz and video bandwidth 3 MHz. An RMS detector was used and sweep time was set to auto and 100 traces performed. The span was set to encompass the entire 26 dB emission bandwidth. The channel power results are recorded in the tables below.
2. Measurements were performed using configurations detailed in Section 3.5 of this test report on the relevant channels.
3. For data rates where the EUT was transmitting at <98% duty cycle, the calculated duty cycle in Section 4.1 was added to the measured power in order to compute the average power during the actual transmission time.
4. For all modes of operation, the antenna gain is < 6 dBi.
5. For details on antenna gains refer to Section 3.4 of this test report.
6. The FCC Part 15.407(a)(2) limit is the lesser of 250 mW (24.0 dBm) or $11 \text{ dBm} + 10 \log_{10} B$, where B is the previously measured 26 dB emission bandwidth in MHz. For U-NII-2A band, the 26 dB EBW is greater than 20 MHz.

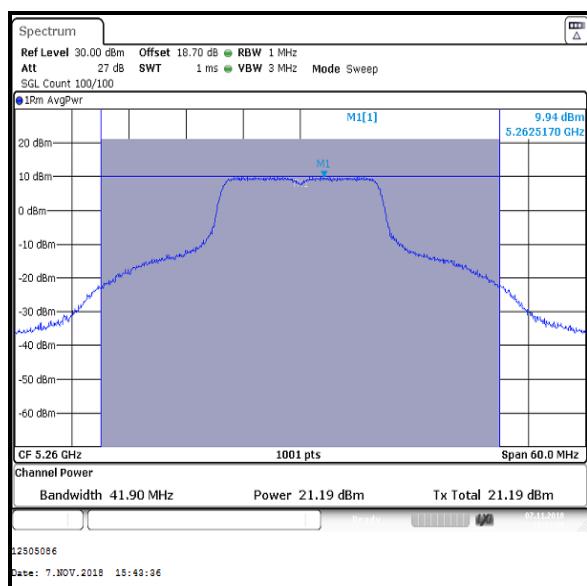
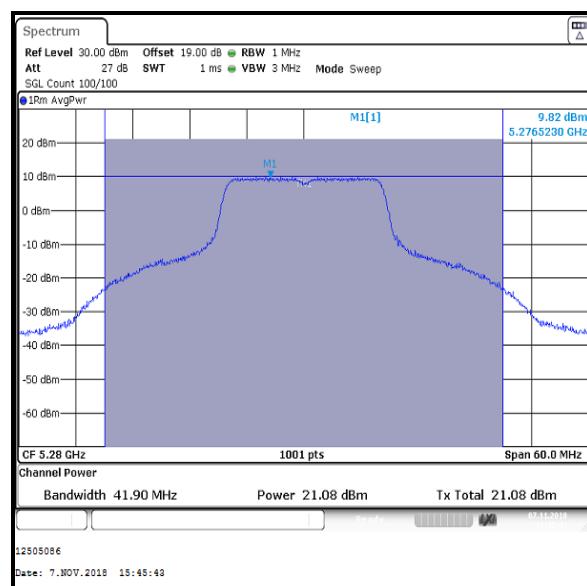
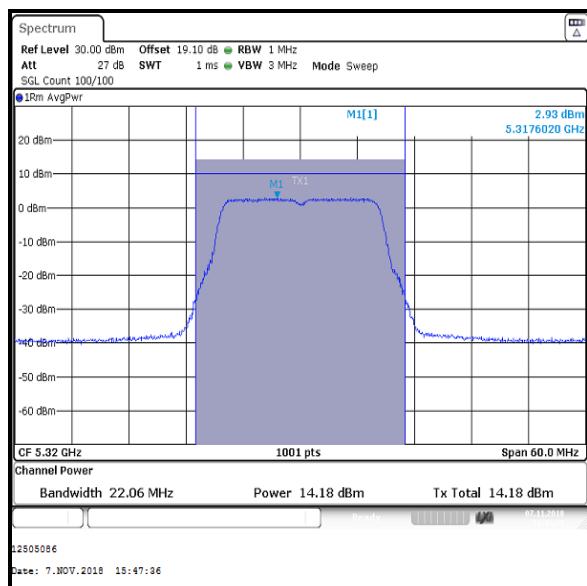
$$\begin{aligned}
 & \text{For } B > 20 \text{ MHz} \rightarrow \\
 & \rightarrow \log_{10} B > \log_{10} 20 \rightarrow \\
 & \rightarrow 10 \log_{10} B > 10 \log_{10} 20 \rightarrow \\
 & \rightarrow 11 + 10 \log_{10} B > 11 + 10 \log_{10} 20 \rightarrow \\
 & \rightarrow 11 + 10 \log_{10} B > 24.0 \text{ dBm}
 \end{aligned}$$

Therefore for measured emission bandwidths greater than 20 MHz, the lesser of the two limits is the fixed limit of 250 mW (24.0 dBm). This was applied to the results.

7. The signal analyser was connected to the RF port on the EUT using an RF switch, suitable attenuation and RF cable. An RF level offset was entered on the signal analyser to compensate for the loss of the attenuator and RF cable.

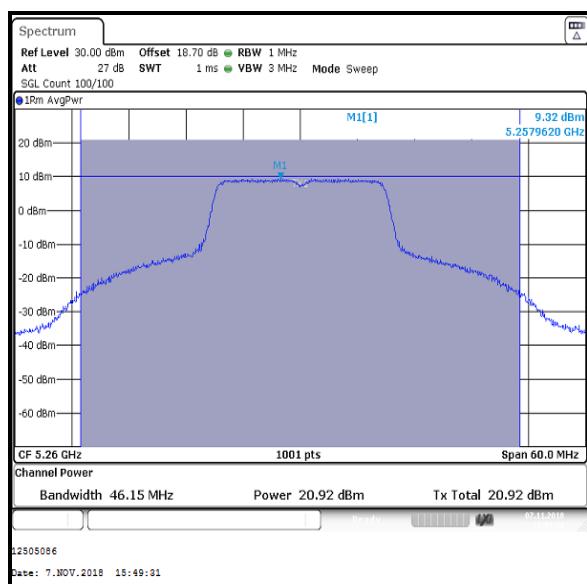
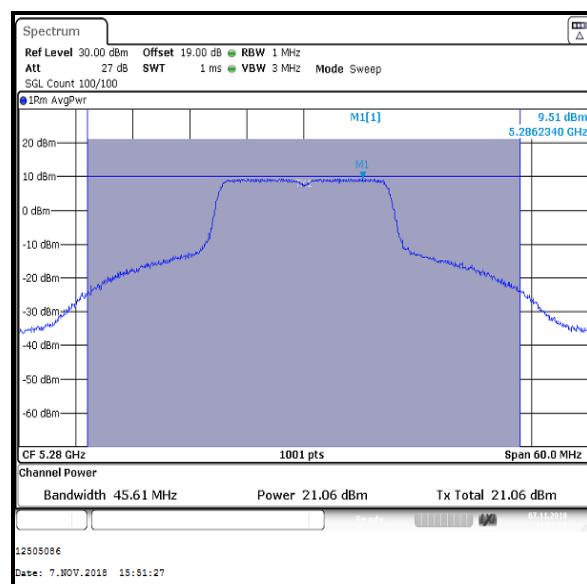
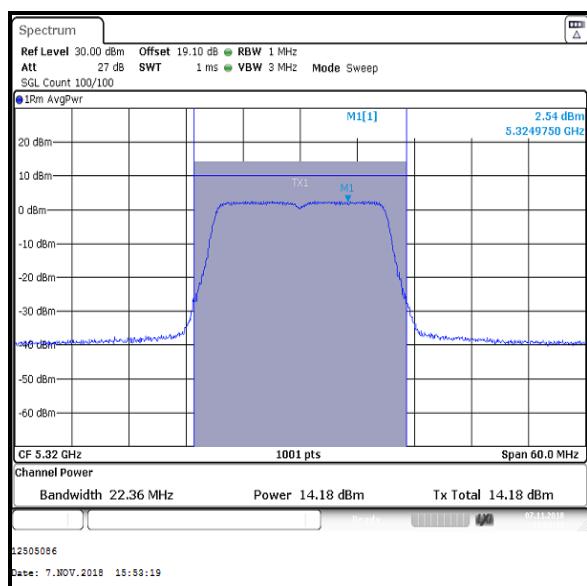
Transmitter Maximum Conducted Output Power (5.25-5.35 GHz band) (continued)**Results: 802.11a / 20 MHz / SISO / BPSK / 6 Mbps / Core 2**

Channel	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	5260	21.2	24.0	2.8	Complied
Middle	5280	21.1	24.0	2.9	Complied
Top	5320	14.2	24.0	9.8	Complied

**Bottom Channel****Middle Channel****Top Channel**

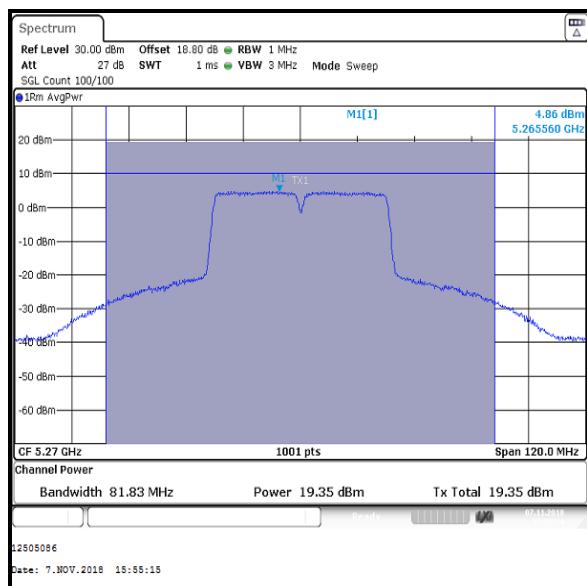
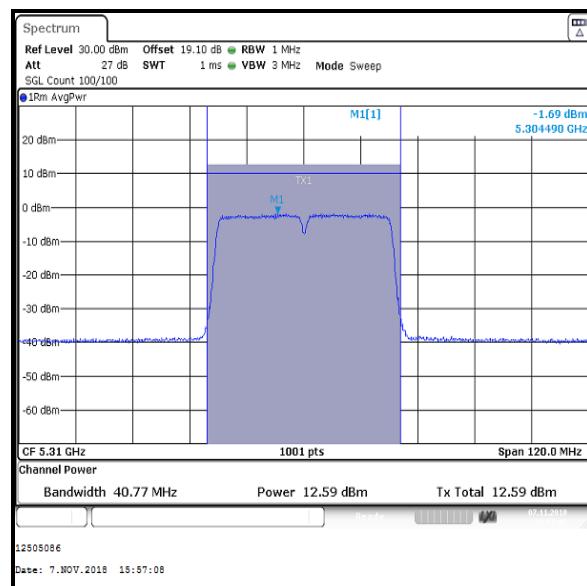
Transmitter Maximum Conducted Output Power (5.25-5.35 GHz band) (continued)**Results: 802.11n / 20 MHz / SISO / BPSK / MCS0 / Core 2**

Channel	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	5260	20.9	24.0	3.1	Complied
Middle	5280	21.1	24.0	2.9	Complied
Top	5320	14.2	24.0	9.8	Complied

**Bottom Channel****Middle Channel****Top Channel**

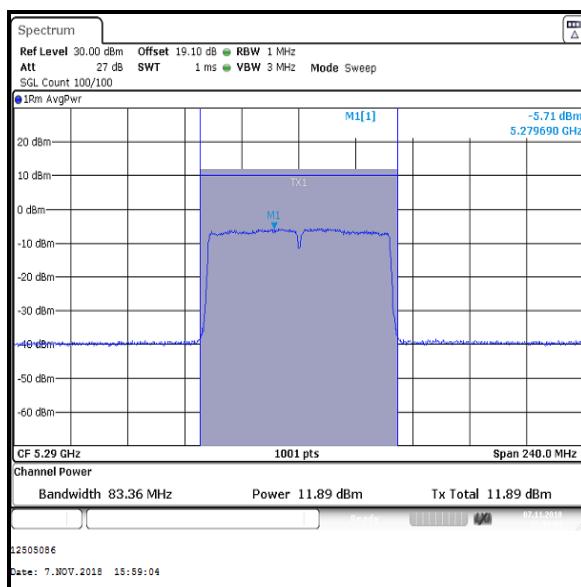
Transmitter Maximum Conducted Output Power (5.25-5.35 GHz band) (continued)**Results: 802.11n / 40 MHz / SISO / BPSK / MCS0 / Core 2**

Channel	Frequency (MHz)	Conducted Power (dBm)	Duty cycle correction factor (dB)	Corrected Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	5270	19.4	0.1	19.5	24.0	4.5	Complied
Top	5310	12.6	0.1	12.7	24.0	11.3	Complied

**Bottom Channel****Top Channel**

Transmitter Maximum Conducted Output Power (5.25-5.35 GHz band) (continued)**Results: 802.11ac / 80 MHz / SISO / BPSK / MCS0 / Core 2**

Channel	Frequency (MHz)	Conducted Power (dBm)	Duty cycle correction factor (dB)	Corrected Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Single	5290	11.9	0.2	12.1	24.0	11.9	Complied

**Single Channel**

Transmitter Maximum Conducted Output Power (5.47-5.725 GHz band)**4.4.3. 5.47-5.725 GHz band****Test Summary:**

Test Engineer:	Max Passell	Test Date:	07 November 2018
Test Sample Serial Number:	C02X2007KFLX		

FCC Reference:	Part 15.407(a)(2)
Test Method Used:	KDB 789033 D02 Section II.E.2.b) and II.E.2.d)

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	50

Note(s):

1. For conducted power tests where the duty cycle is >98%, the measurements were performed using a signal analyser in accordance with FCC KDB 789033 II.E.2.b) Method SA-1. Where the duty cycle is <98%, the measurements were performed in accordance with FCC KDB 789033 II.E.2.d) Method SA-2. The signal analyser's integration function was used to integrate across the 26 dB emission bandwidth. The resolution bandwidth was set to 1 MHz and video bandwidth 3 MHz. An RMS detector was used and sweep time was set to auto and 100 traces performed. The span was set to encompass the entire 26 dB emission bandwidth. The channel power results are recorded in the tables below.
2. Measurements were performed using configurations detailed in Section 3.5 of this test report on the relevant channels.
3. For data rates where the EUT was transmitting at <98% duty cycle, the calculated duty cycle in Section 4.1 was added to the measured power in order to compute the average power during the actual transmission time.
4. For all modes of operation, the antenna gain is < 6 dBi.
5. For details on antenna gains refer to Section 3.4 of this test report.
6. The FCC Part 15.407(a)(2) limit is the lesser of 250 mW (24.0 dBm) or $11 \text{ dBm} + 10 \log_{10} B$, where B is the previously measured 26 dB emission bandwidth in MHz. For U-NII-2C band, the 26 dB EBW is greater than 20 MHz.

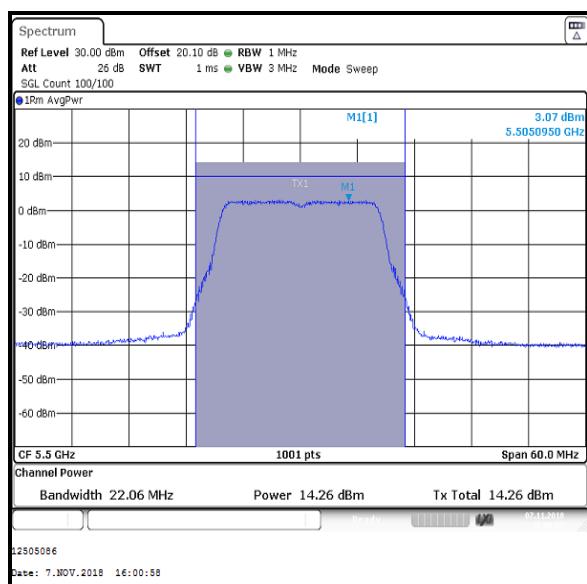
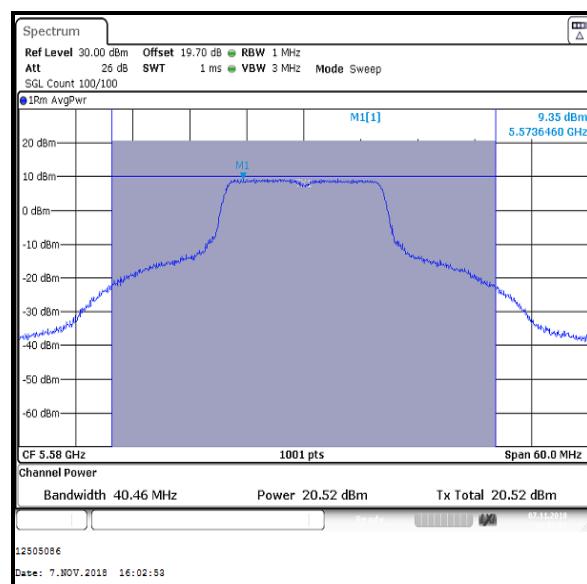
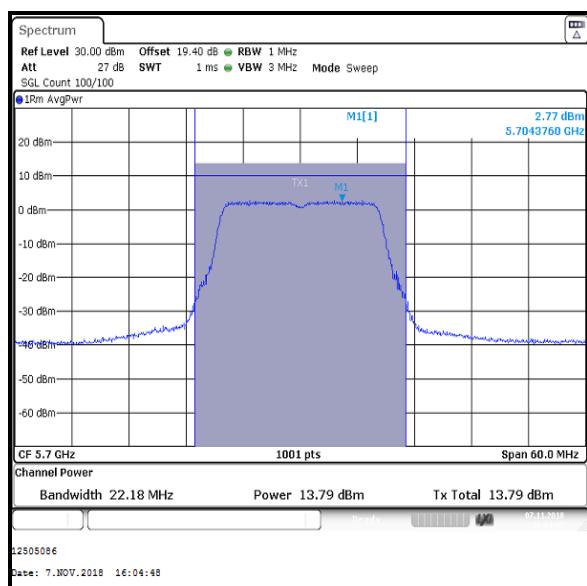
$$\begin{aligned}
 & \text{For } B > 20 \text{ MHz} \rightarrow \\
 & \rightarrow \log_{10} B > \log_{10} 20 \rightarrow \\
 & \rightarrow 10 \log_{10} B > 10 \log_{10} 20 \rightarrow \\
 & \rightarrow 11 + 10 \log_{10} B > 11 + 10 \log_{10} 20 \rightarrow \\
 & \rightarrow 11 + 10 \log_{10} B > 24.0 \text{ dBm}
 \end{aligned}$$

Therefore for measured emission bandwidths greater than 20 MHz, the lesser of the two limits is the fixed limit of 250 mW (24.0 dBm). This was applied to the results.

7. The signal analyser was connected to the RF port on the EUT using an RF switch, suitable attenuation and RF cable. An RF level offset was entered on the signal analyser to compensate for the loss of the attenuator and RF cable.

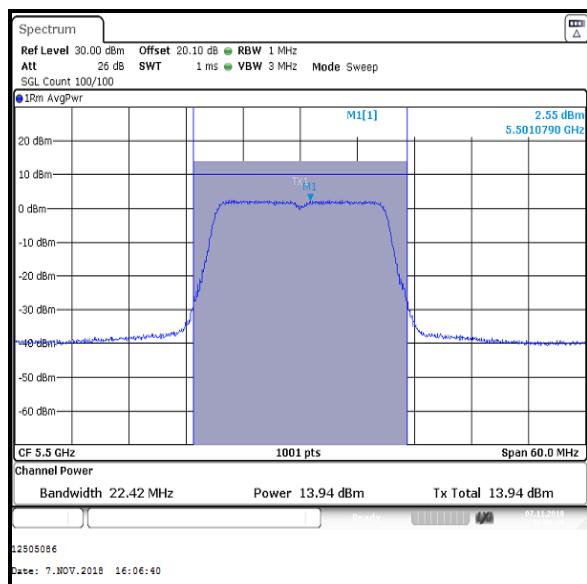
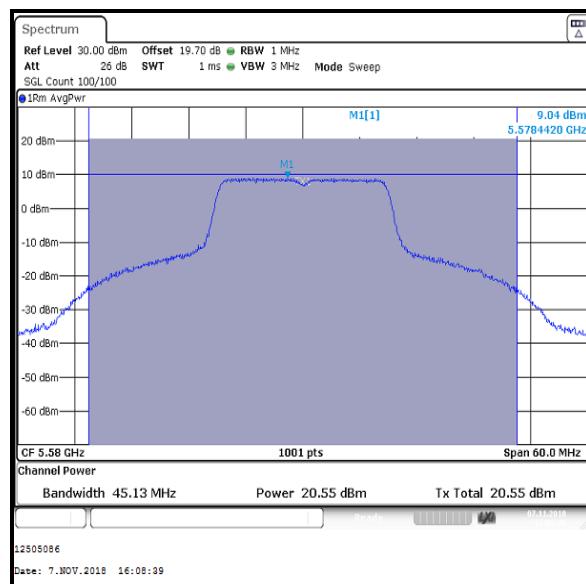
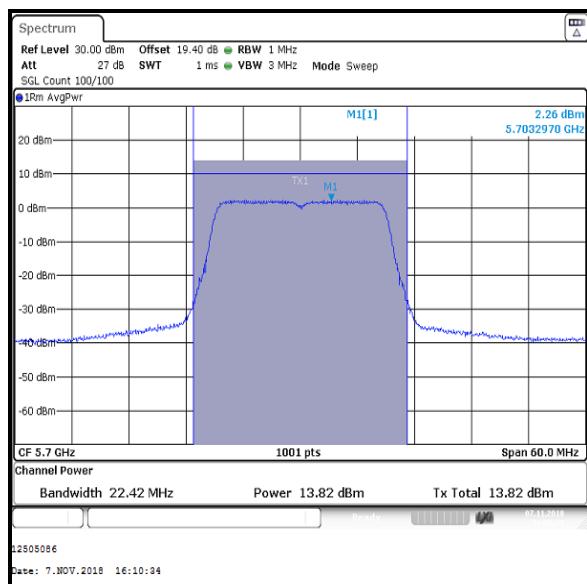
Transmitter Maximum Conducted Output Power (5.47-5.725 GHz band) (continued)**Results: 802.11a / 20 MHz / SISO / BPSK / 6 Mbps / Core 2**

Channel	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	5500	14.3	24.0	9.7	Complied
Middle	5580	20.5	24.0	3.5	Complied
Top	5700	13.8	24.0	10.2	Complied

**Bottom Channel****Middle Channel****Top Channel**

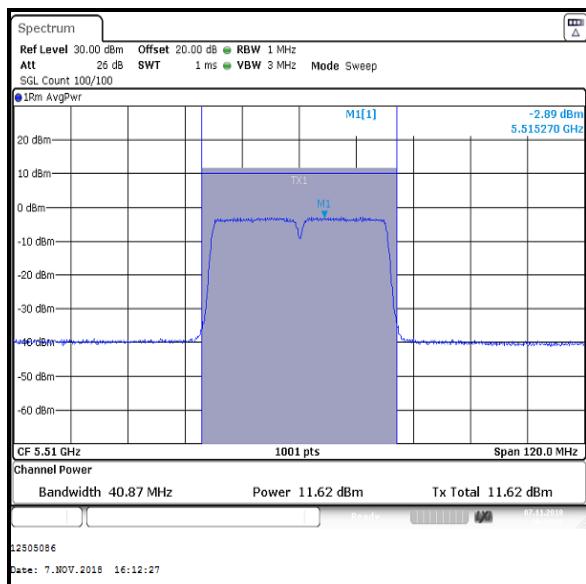
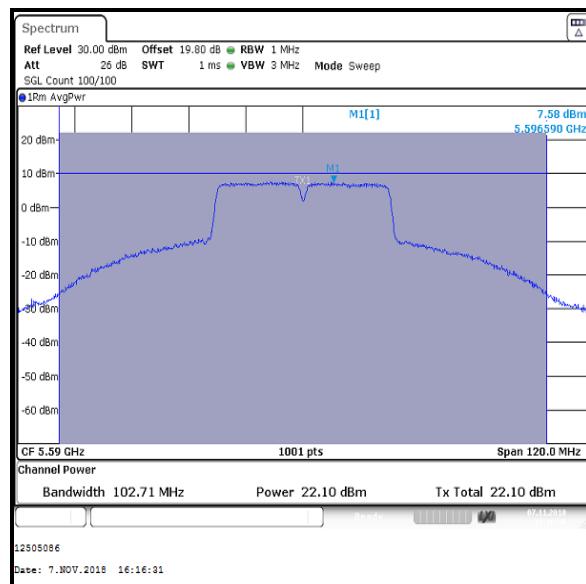
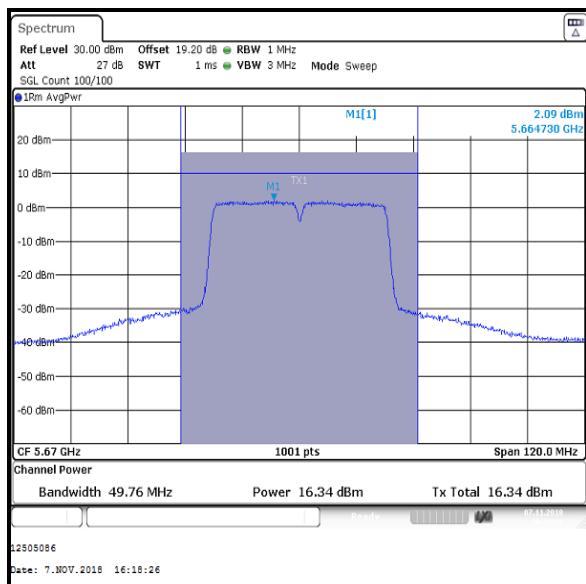
Transmitter Maximum Conducted Output Power (5.47-5.725 GHz band) (continued)**Results: 802.11n / 20 MHz / SISO / BPSK / MCS0 / Core 2**

Channel	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	5500	13.9	24.0	10.1	Complied
Middle	5580	20.6	24.0	3.4	Complied
Top	5700	13.8	24.0	10.2	Complied

**Bottom Channel****Middle Channel****Top Channel**

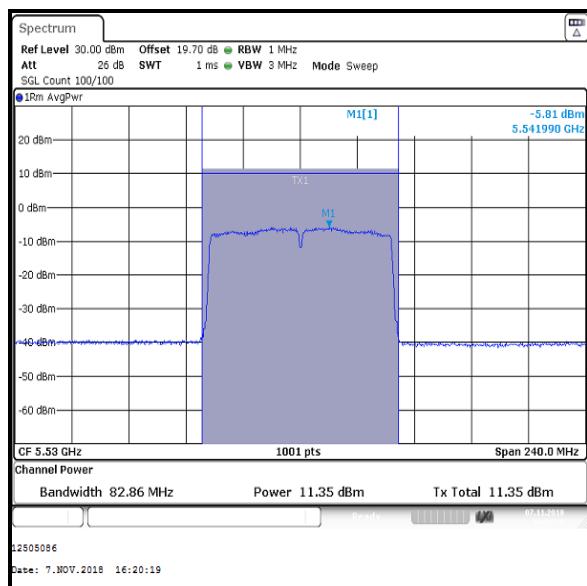
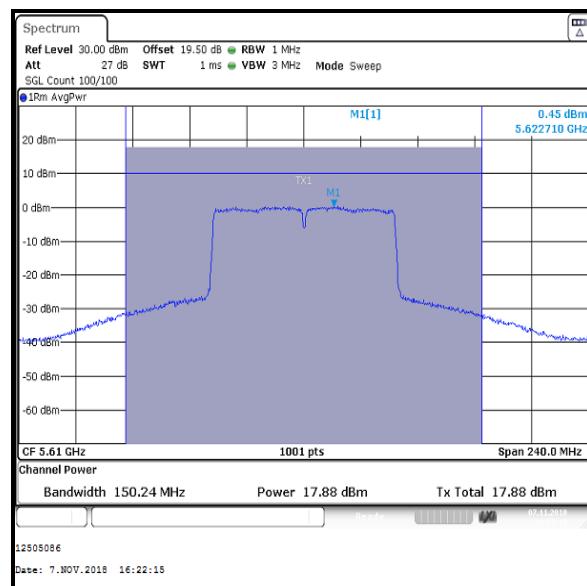
Transmitter Maximum Conducted Output Power (5.47-5.725 GHz band) (continued)**Results: 802.11n / 40 MHz / SISO / BPSK / MCS0 / Core 2**

Channel	Frequency (MHz)	Conducted Power (dBm)	Duty cycle correction factor (dB)	Corrected Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	5510	11.6	0.1	11.7	24.0	12.3	Complied
Middle	5590	22.1	0.1	22.2	24.0	1.8	Complied
Top	5670	16.3	0.1	16.4	24.0	7.6	Complied

**Bottom Channel****Middle Channel****Top Channel**

Transmitter Maximum Conducted Output Power (5.47-5.725 GHz band) (continued)**Results: 802.11ac / 80 MHz / SISO / BPSK / MCS0 / Core 2**

Channel	Frequency (MHz)	Conducted Power (dBm)	Duty cycle correction factor (dB)	Corrected Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	5530	11.4	0.2	11.6	24.0	12.4	Complied
Top	5610	17.9	0.2	18.1	24.0	5.9	Complied

**Bottom Channel****Top Channel**

Transmitter Maximum Conducted Output Power (Straddle Channels)**4.4.4. Channels that straddle the U-NII-2C and U-NII-3 bands****Test Summary:**

Test Engineer:	Max Passell	Test Date:	07 November 2018
Test Sample Serial Number:	C02X2007KFLX		

FCC Reference:	Part 15.407(a)(2)
Test Method Used:	KDB 789033 D02 Section II.E.2.b) and II.E.2.d)

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	50

Note(s):

1. Channels that straddle the U-NII-2C and U-NII-3 bands at 5725 MHz need to meet requirements of both U-NII bands. Due to maximum conducted power limit being more stringent on U-NII-2C, compliance is shown against the limits of U-NII-2C. By default, the EUT also complies on U-NII-3.
2. For conducted power tests where the duty cycle is >98%, the measurements were performed using a signal analyser in accordance with FCC KDB 789033 II.E.2.b) Method SA-1. Where the duty cycle is <98%, the measurements were performed in accordance with FCC KDB 789033 II.E.2.d) Method SA-2. The signal analyser's integration function was used to integrate across the 26 dB emission bandwidth. The resolution bandwidth was set to 1 MHz and video bandwidth 3 MHz. An RMS detector was used and sweep time was set to auto and 100 traces performed. The span was set to encompass the entire 26 dB emission bandwidth. The channel power results are recorded in the tables below.
3. Measurements were performed using configurations detailed in Section 3.5 of this test report on the relevant channels.
4. For data rates where the EUT was transmitting at <98% duty cycle, the calculated duty cycle in Section 4.1 was added to the measured power in order to compute the average power during the actual transmission time.
5. For all modes of operation, the antenna gain is < 6 dBi.
6. For details on antenna gains refer to Section 3.4 of this test report.
7. The FCC Part 15.407(a)(2) limit is the lesser of 250 mW (24.0 dBm) or $11 + 10 \log_{10} B$, where B is the previously measured 26 dB emission bandwidth in MHz. The 26 dB EBW is greater than 20 MHz.

$$\begin{aligned}
 & \text{For } B > 20 \text{ MHz} \rightarrow \\
 & \rightarrow \log_{10} B > \log_{10} 20 \rightarrow \\
 & \rightarrow 10 \log_{10} B > 10 \log_{10} 20 \rightarrow \\
 & \rightarrow 11 + 10 \log_{10} B > 11 + 10 \log_{10} 20 \rightarrow \\
 & \rightarrow 11 + 10 \log_{10} B > 24.0 \text{ dBm}
 \end{aligned}$$

Therefore for measured emission bandwidths greater than 20 MHz, the lesser of the two limits is the fixed limit of 250 mW (24.0 dBm). This was applied to the results.

8. The signal analyser was connected to the RF port on the EUT using an RF switch, suitable attenuation and RF cable. An RF level offset was entered on the signal analyser to compensate for the loss of the attenuator and RF cable.