



7.7.2 SISO Core 1 Radiated Spurious Emission Measurements


§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

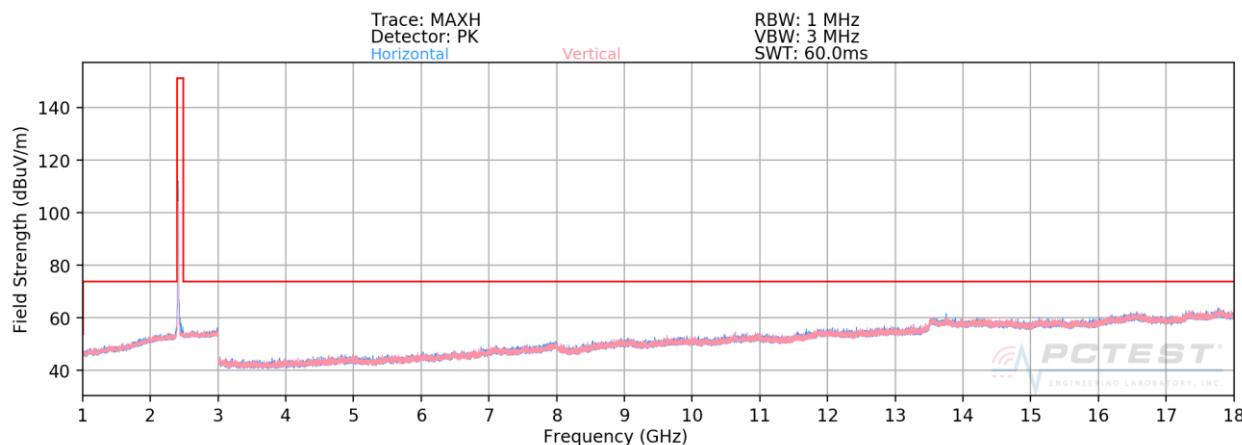

Plot 7-88. Radiated Spurious Plot above 1GHz SISO CORE 1 (802.11b – Ch. 1)

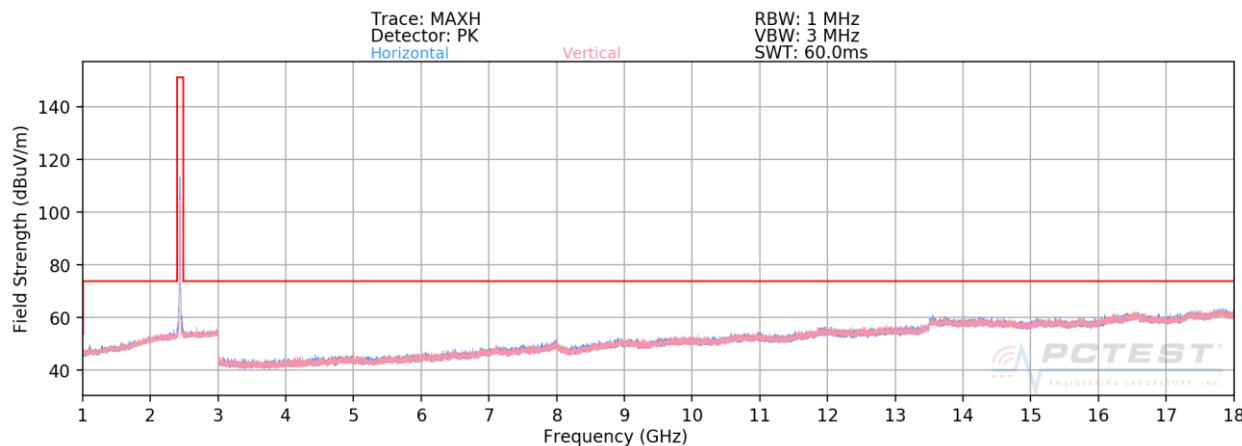

Plot 7-89. Radiated Spurious Plot above 1GHz SISO CORE 1 (802.11b – Ch. 6)

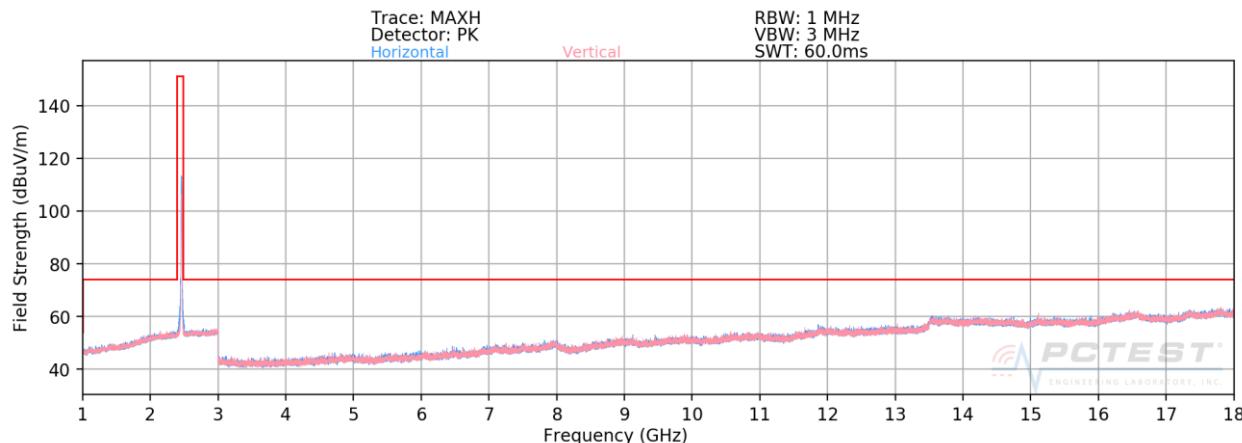

Plot 7-90. Radiated Spurious Plot above 1GHz SISO CORE 1 (802.11b – Ch. 11)

FCC ID: BCGA2152	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1811080025-02.BCG	Test Dates: 11/09/2018-02/07/2019	EUT Type: Tablet Device	Page 74 of 104

SISO Core 1 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4824.00	Avg	H	171	108	-77.10	9.02	38.92	53.98	-15.06
4824.00	Peak	H	171	108	-68.59	9.02	47.43	73.98	-26.55
12060.00	Avg	H	-	-	-85.74	21.37	42.63	53.98	-11.35
12060.00	Peak	H	-	-	-73.78	21.37	54.59	73.98	-19.39

Table 7-19. Radiated Measurements SISO CORE 1

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4874.00	Avg	H	154	108	-82.01	9.12	34.11	53.98	-19.87
4874.00	Peak	H	154	108	-70.79	9.12	45.33	73.98	-28.65
7311.00	Avg	H	138	105	-83.01	13.57	37.56	53.98	-16.41
7311.00	Peak	H	138	105	-71.58	13.57	48.99	73.98	-24.98
12185.00	Avg	H	-	-	-85.71	21.34	42.63	53.98	-11.35
12185.00	Peak	H	-	-	-73.52	21.34	54.82	73.98	-19.16

Table 7-20. Radiated Measurements SISO CORE 1

FCC ID: BCGA2152	 MEASUREMENT REPORT (CERTIFICATION)				Approved by: Quality Manager
Test Report S/N: 1C1811080025-02.BCG	Test Dates: 11/09/2018-02/07/2019	EUT Type: Tablet Device			Page 75 of 104

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4924.00	Avg	H	171	111	-79.21	8.96	36.75	53.98	-17.23
4924.00	Peak	H	171	111	-69.59	8.96	46.37	73.98	-27.61
7386.00	Avg	H	130	165	-83.55	13.85	37.30	53.98	-16.67
7386.00	Peak	H	130	165	-72.09	13.85	48.76	73.98	-25.21
12310.00	Avg	H	-	-	-86.68	22.19	42.51	53.98	-11.47
12310.00	Peak	H	-	-	-74.33	22.19	54.86	73.98	-19.12

Table 7-21. Radiated Measurements SISO CORE 1


FCC ID: BCGA2152	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1811080025-02.BCG	Test Dates: 11/09/2018-02/07/2019	EUT Type: Tablet Device	Page 76 of 104	

7.7.3 CDD Radiated Spurious Emission Measurements


§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

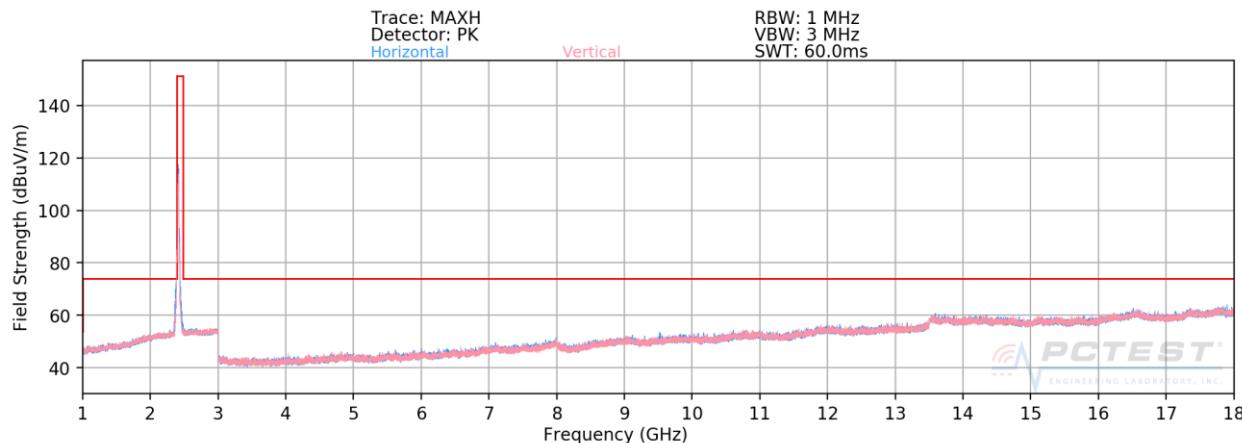

Plot 7-91. Radiated Spurious Plot above 1GHz CDD (802.11n – Ch. 1)

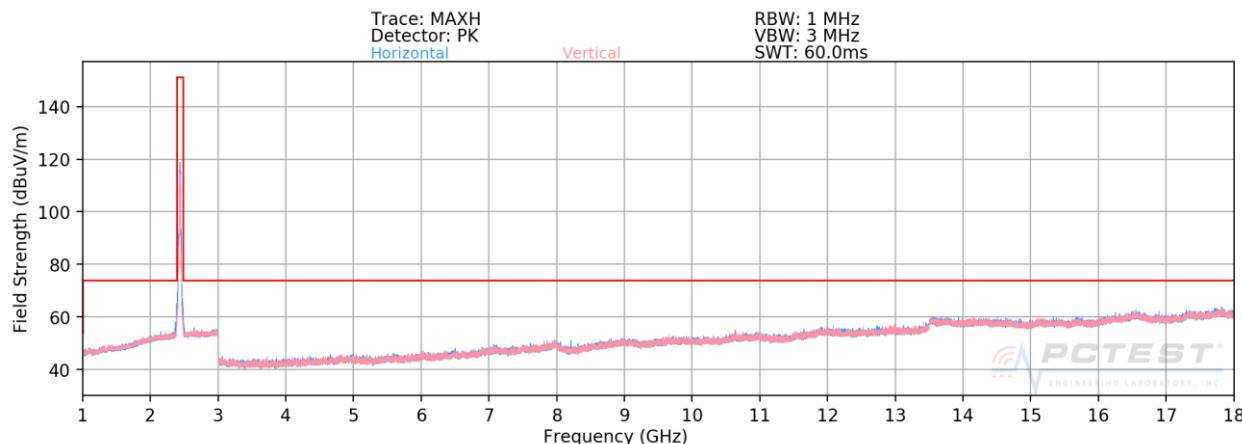

Plot 7-92. Radiated Spurious Plot above 1GHz CDD (802.11n – Ch. 6)

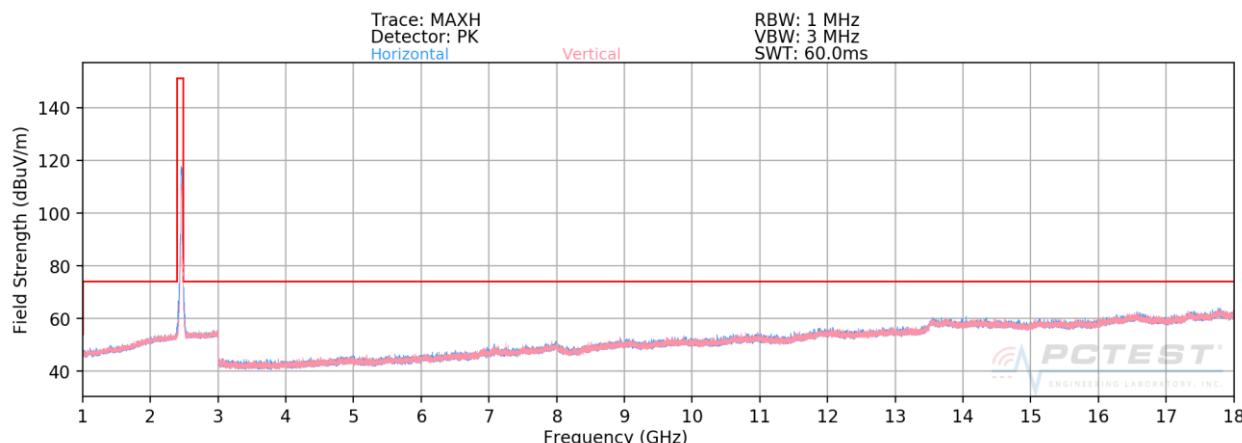

Plot 7-93. Radiated Spurious Plot above 1GHz CDD (802.11n – Ch. 11)

FCC ID: BCGA2152	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1811080025-02.BCG	Test Dates: 11/09/2018-02/07/2019	EUT Type: Tablet Device	Page 77 of 104	

CDD Radiated Spurious Emission Measurements
§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4824.00	Avg	H	134	108	-80.75	9.02	35.27	53.98	-18.71
4824.00	Peak	H	134	108	-68.42	9.02	47.60	73.98	-26.38
12060.00	Avg	H	-	-	-86.11	21.37	42.26	53.98	-11.72
12060.00	Peak	H	-	-	-74.68	21.37	53.69	73.98	-20.29

Table 7-22. Radiated Measurements CDD

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2437MHz
Channel:	06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4874.00	Avg	H	-	-	-82.07	9.12	34.05	53.98	-19.93
4874.00	Peak	H	-	-	-69.12	9.12	47.00	73.98	-26.98
7311.00	Avg	H	-	-	-83.80	13.57	36.77	53.98	-17.20
7311.00	Peak	H	-	-	-72.30	13.57	48.27	73.98	-25.70
12185.00	Avg	H	-	-	-85.04	21.34	43.30	53.98	-10.68
12185.00	Peak	H	-	-	-73.44	21.34	54.90	73.98	-19.08

Table 7-23. Radiated Measurements CDD

FCC ID: BCGA2152	 PCTEST <small>ENGINEERING LABORATORY, INC.</small>	MEASUREMENT REPORT (CERTIFICATION)				Approved by: Quality Manager
Test Report S/N: 1C1811080025-02.BCG	Test Dates: 11/09/2018-02/07/2019	EUT Type: Tablet Device				

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4924.00	Avg	H	-	-	-82.79	8.96	33.17	53.98	-20.81
4924.00	Peak	H	-	-	-72.12	8.96	43.84	73.98	-30.14
7386.00	Avg	H	-	-	-84.85	13.85	36.00	53.98	-17.97
7386.00	Peak	H	-	-	-73.85	13.85	47.00	73.98	-26.97
12310.00	Avg	H	-	-	-87.23	22.19	41.96	53.98	-12.02
12310.00	Peak	H	-	-	-76.20	22.19	52.99	73.98	-20.99

Table 7-24. Radiated Measurements CDD


FCC ID: BCGA2152	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1811080025-02.BCG	Test Dates: 11/09/2018-02/07/2019	EUT Type: Tablet Device	Page 79 of 104	

CDD Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209; RSS-Gen [8.9]

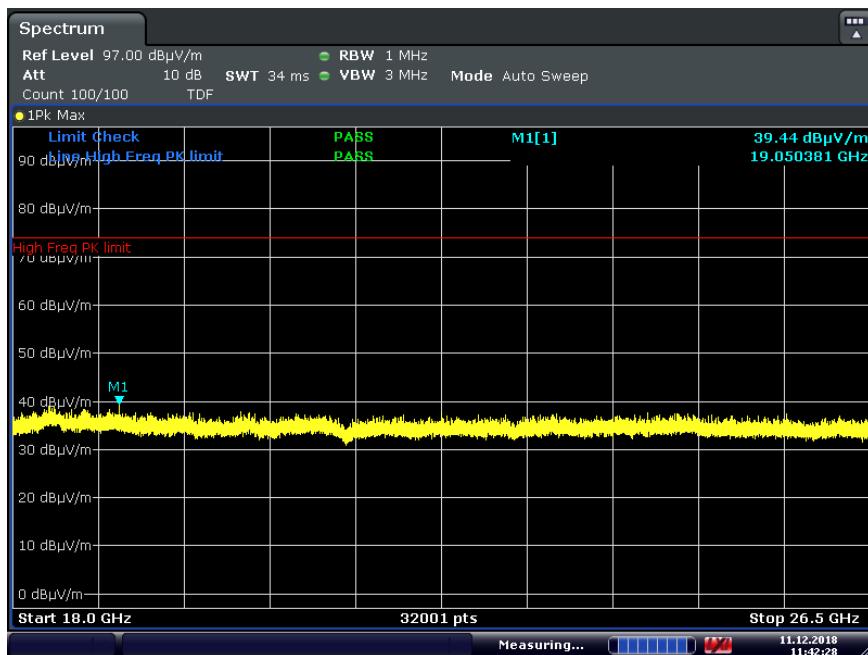

Plot 7-94. Radiated Spurious Plot above 18GHz CDD (802.11n – Ch.6, Pol H)

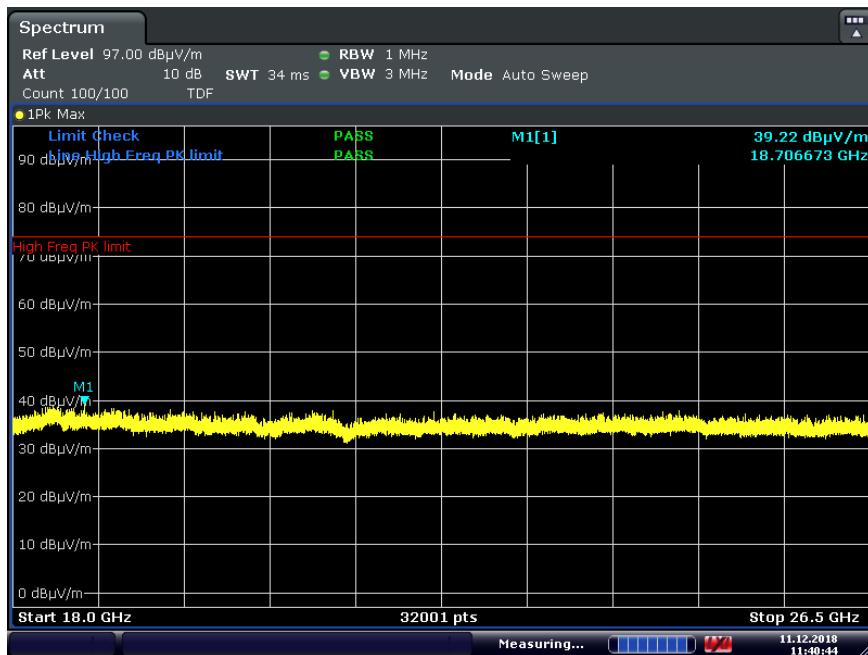

Plot 7-95. Radiated Spurious Plot above 18GHz CDD (802.11n – Ch.6, Pol V)


FCC ID: BCGA2152	 PCTEST® <small>ENGINEERING LABORATORY, INC.</small>		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080025-02.BCG	Test Dates: 11/09/2018-02/07/2019	EUT Type: Tablet Device	Page 80 of 104	

7.7.4 SISO Core 0 Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]


The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

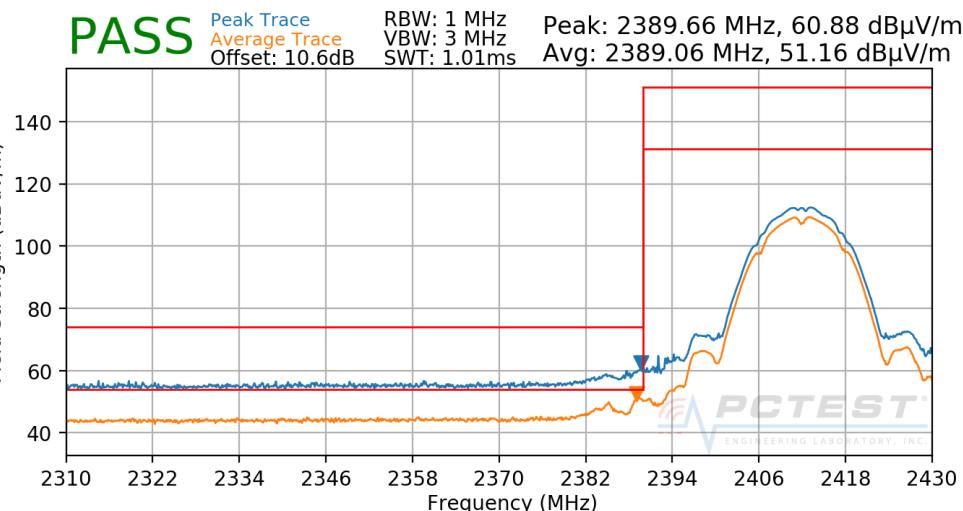

Plot 7-96. Radiated Restricted Lower Band Edge Measurement SISO CORE 0


Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2457MHz
 Channel: 10

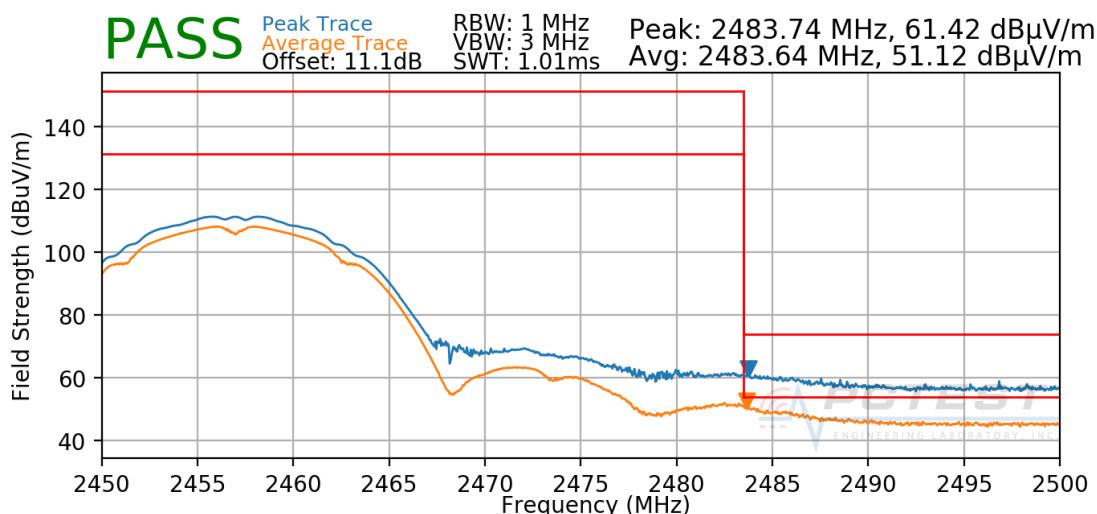

Plot 7-97. Radiated Restricted Upper Band Edge Measurement SISO CORE 0


FCC ID: BCGA2152	 PCTEST ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080025-02.BCG	Test Dates: 11/09/2018-02/07/2019	EUT Type: Tablet Device		Page 81 of 104

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

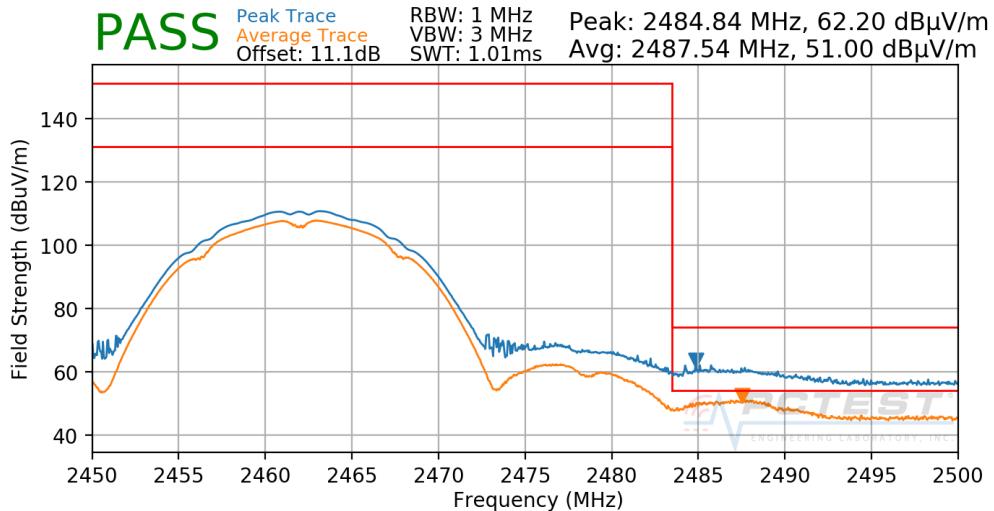

Plot 7-98. Radiated Restricted Upper Band Edge Measurement SISO CORE 0


Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

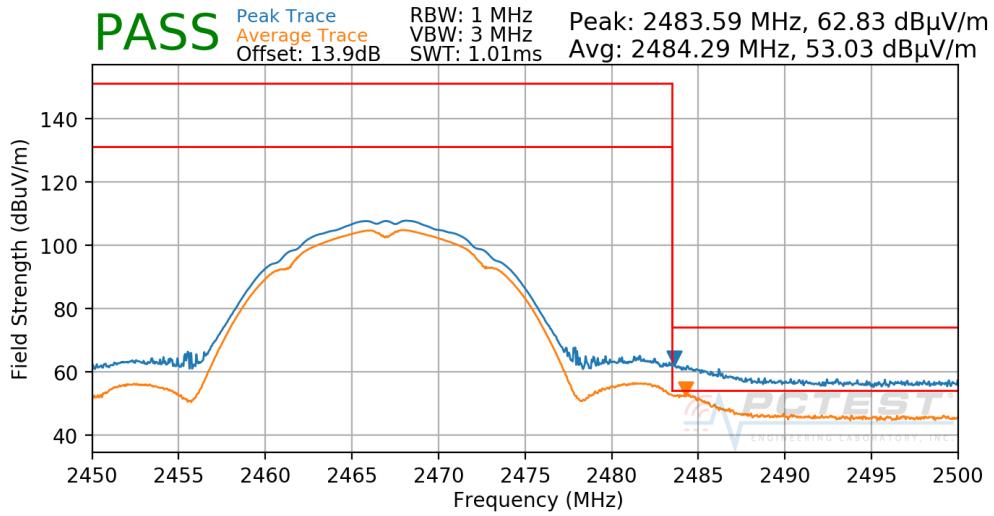

Plot 7-99. Radiated Restricted Upper Band Edge Measurement SISO CORE 0


FCC ID: BCGA2152	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1811080025-02.BCG	Test Dates: 11/09/2018-02/07/2019	EUT Type: Tablet Device		Page 82 of 104

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2472MHz
 Channel: 13

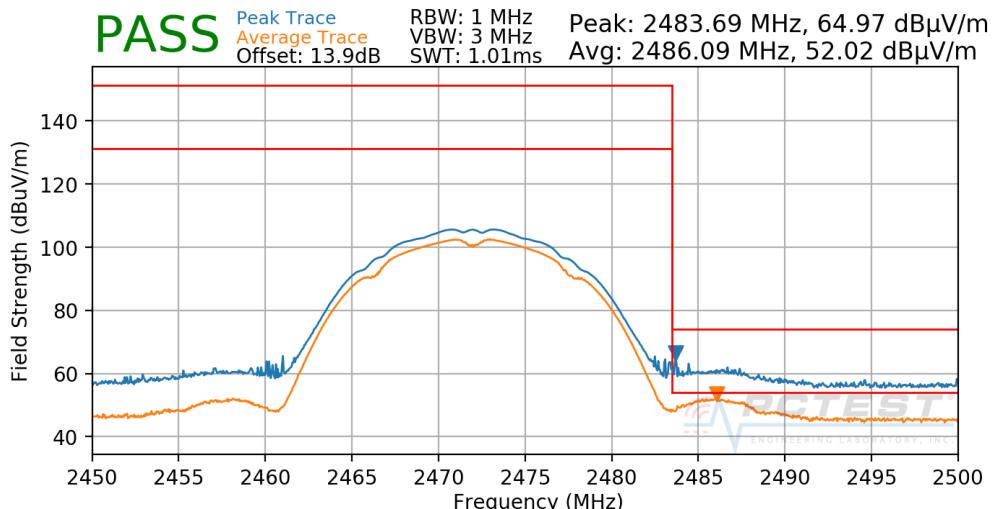

Plot 7-100. Radiated Restricted Upper Band Edge Measurement SISO CORE 0


Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

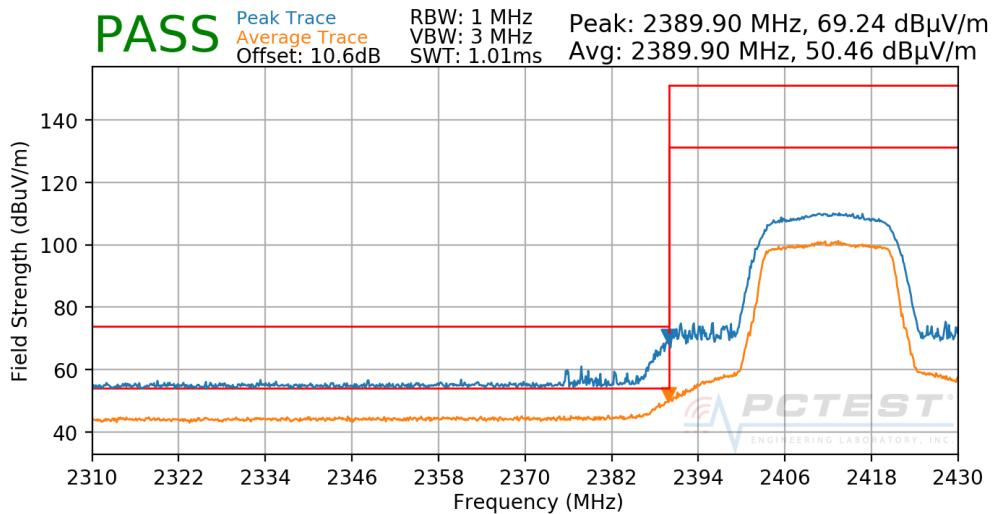

Plot 7-101. Radiated Restricted Lower Band Edge Measurement SISO CORE 0


FCC ID: BCGA2152	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1811080025-02.BCG	Test Dates: 11/09/2018-02/07/2019	EUT Type: Tablet Device		Page 83 of 104

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2417MHz
 Channel: 2

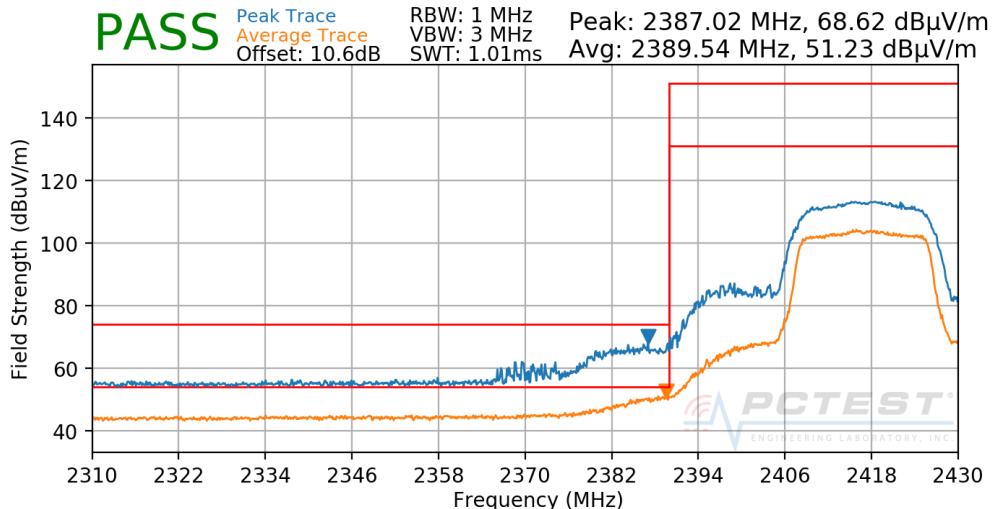

Plot 7-102. Radiated Restricted Lower Band Edge Measurement SISO CORE 0


Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2452MHz
 Channel: 9

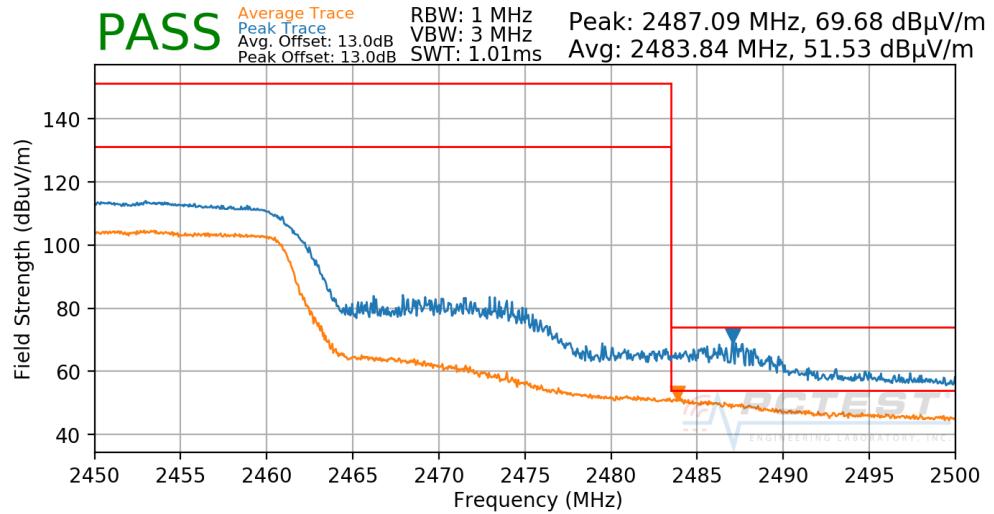

Plot 7-103. Radiated Restricted Upper Band Edge Measurement SISO CORE 0


FCC ID: BCGA2152	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1811080025-02.BCG	Test Dates: 11/09/2018-02/07/2019	EUT Type: Tablet Device		Page 84 of 104

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2457MHz
 Channel: 10

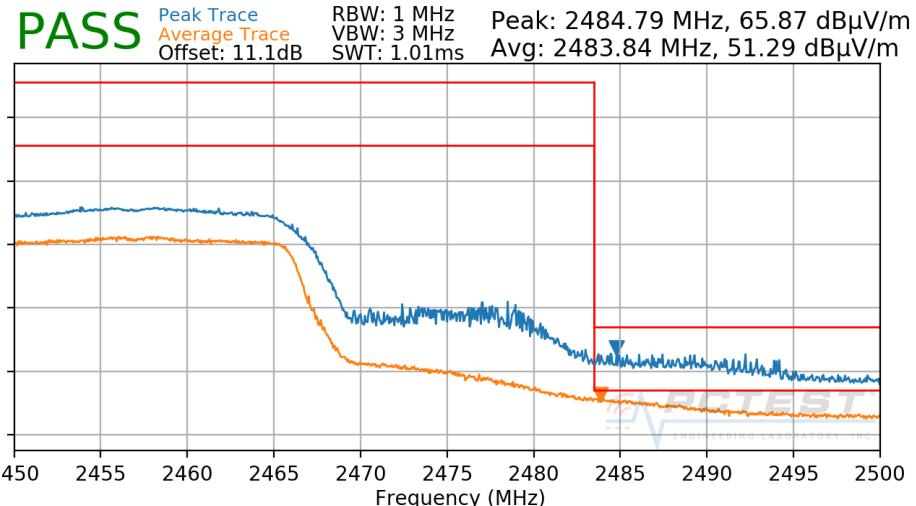

Plot 7-104. Radiated Restricted Upper Band Edge Measurement SISO CORE 0


Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

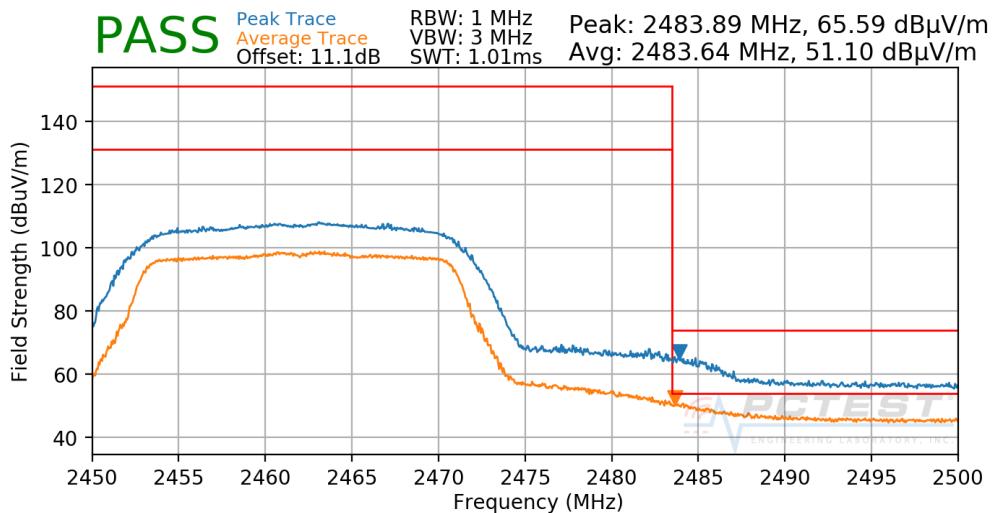

Plot 7-105. Radiated Restricted Upper Band Edge Measurement SISO CORE 0


FCC ID: BCGA2152	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1811080025-02.BCG	Test Dates: 11/09/2018-02/07/2019	EUT Type: Tablet Device		Page 85 of 104

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

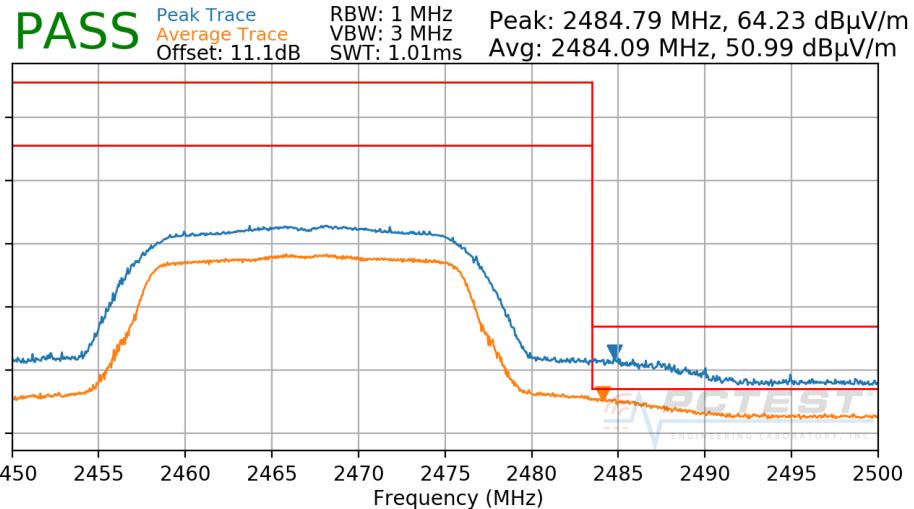

Plot 7-106. Radiated Restricted Upper Band Edge Measurement SISO CORE 0

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2472MHz
 Channel: 13

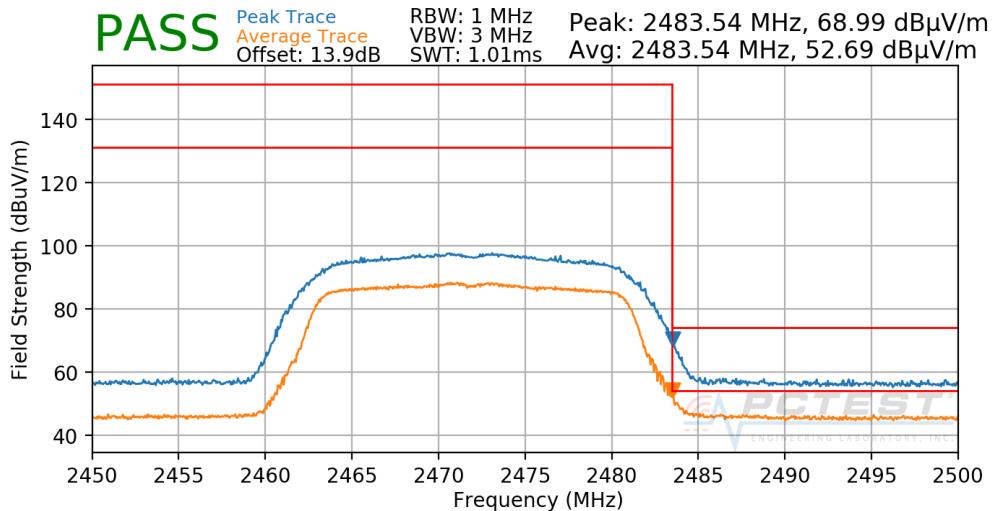

Plot 7-107. Radiated Restricted Upper Band Edge Measurement SISO CORE 0


FCC ID: BCGA2152	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1811080025-02.BCG	Test Dates: 11/09/2018-02/07/2019	EUT Type: Tablet Device		Page 86 of 104

7.7.5 SISO Core 1 Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]


The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

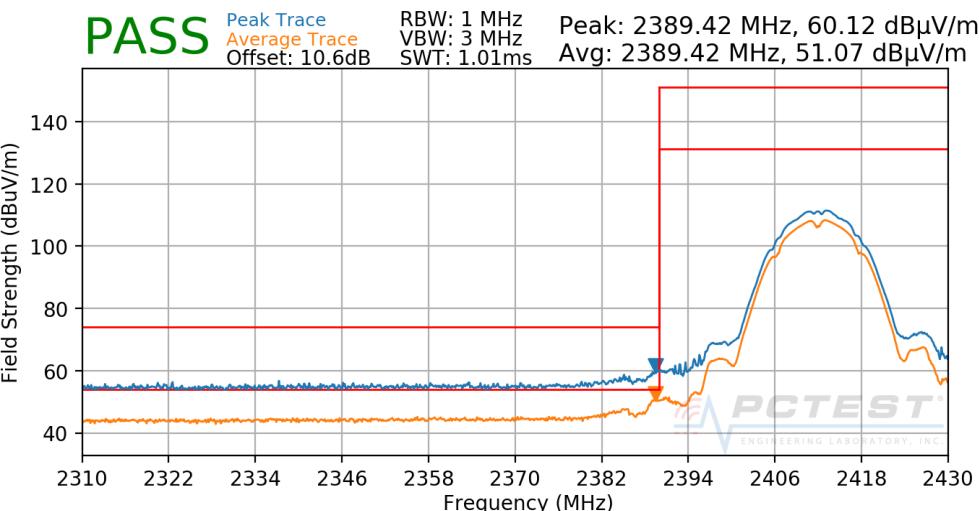

Plot 7-108. Radiated Restricted Lower Band Edge Measurement SISO CORE 1


Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2457MHz
 Channel: 10

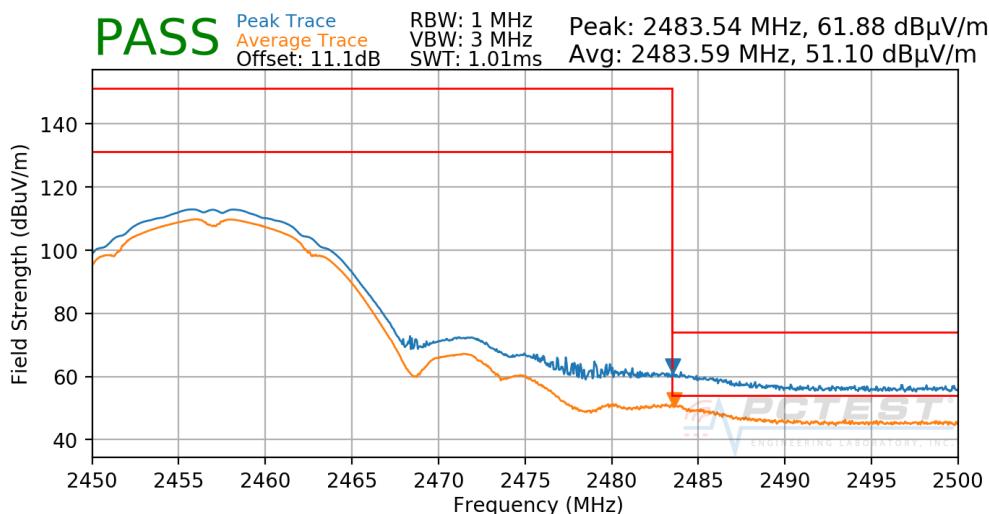

Plot 7-109. Radiated Restricted Upper Band Edge Measurement SISO CORE 1


FCC ID: BCGA2152	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1811080025-02.BCG	Test Dates: 11/09/2018-02/07/2019	EUT Type: Tablet Device	Page 87 of 104

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

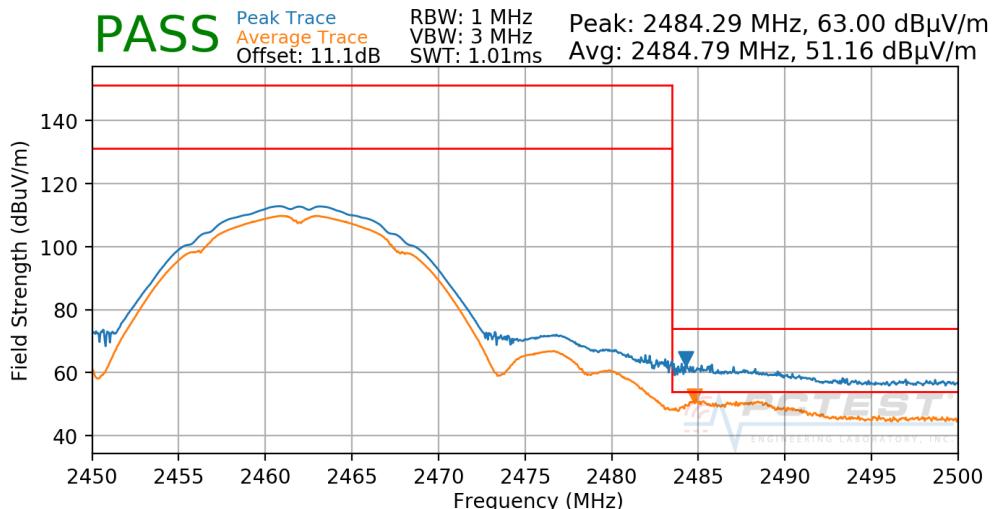

Plot 7-110. Radiated Restricted Upper Band Edge Measurement SISO CORE 1


Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

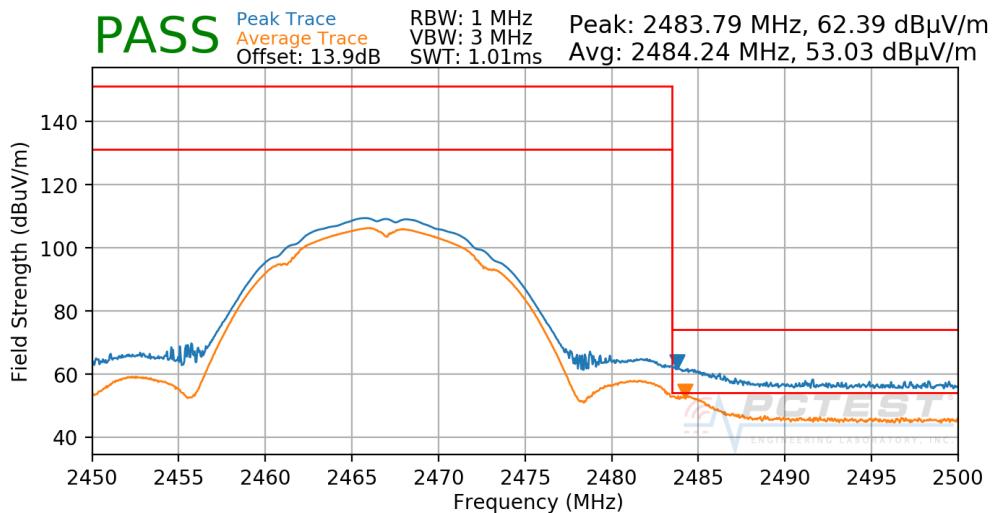

Plot 7-111. Radiated Restricted Upper Band Edge Measurement SISO CORE 1


FCC ID: BCGA2152	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1811080025-02.BCG	Test Dates: 11/09/2018-02/07/2019	EUT Type: Tablet Device		Page 88 of 104

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2472MHz
 Channel: 13

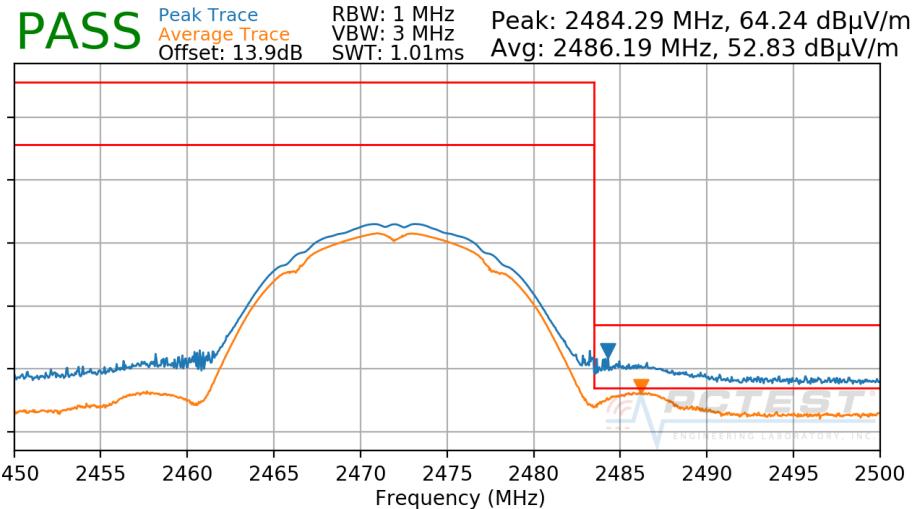

Plot 7-112. Radiated Restricted Upper Band Edge Measurement SISO CORE 1


Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

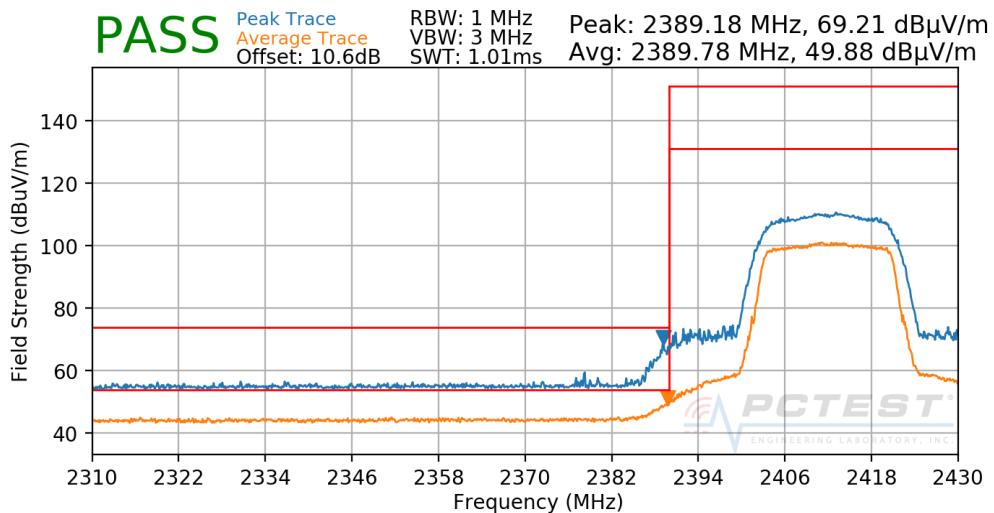

Plot 7-113. Radiated Restricted Lower Band Edge Measurement SISO CORE 1


FCC ID: BCGA2152	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1811080025-02.BCG	Test Dates: 11/09/2018-02/07/2019	EUT Type: Tablet Device		Page 89 of 104

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2417MHz
 Channel: 2

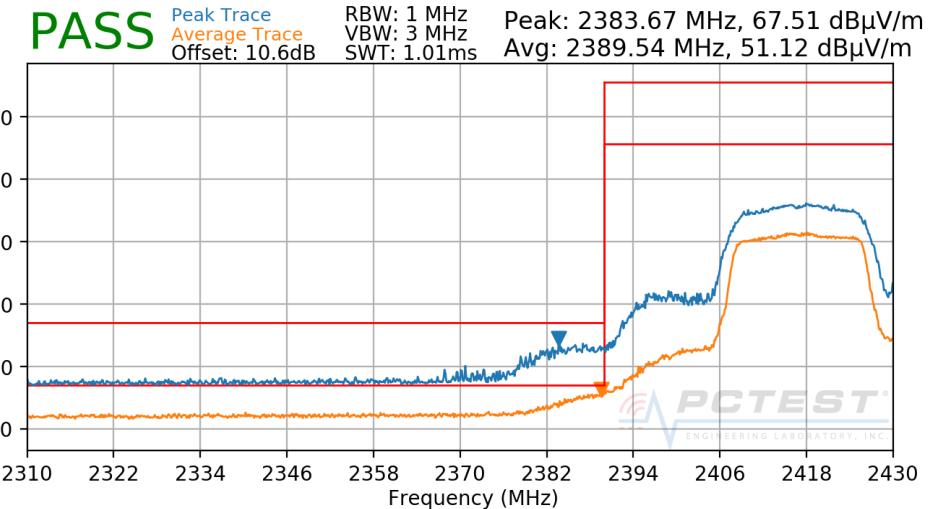

Plot 7-114. Radiated Restricted Lower Band Edge Measurement SISO CORE 1


Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2452MHz
 Channel: 9

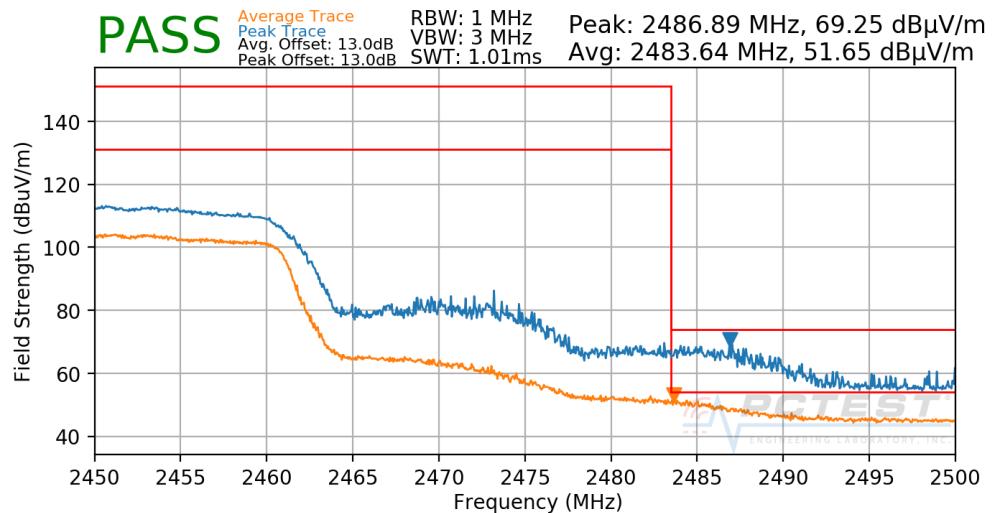

Plot 7-115. Radiated Restricted Upper Band Edge Measurement SISO CORE 1


FCC ID: BCGA2152	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1811080025-02.BCG	Test Dates: 11/09/2018-02/07/2019	EUT Type: Tablet Device		Page 90 of 104

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2457MHz
 Channel: 10

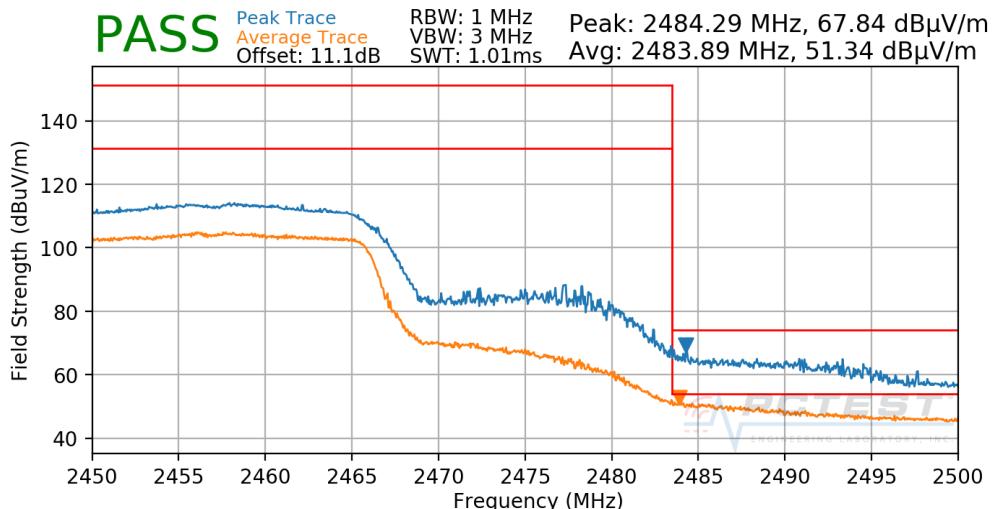

Plot 7-116. Radiated Restricted Upper Band Edge Measurement SISO CORE 1


Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

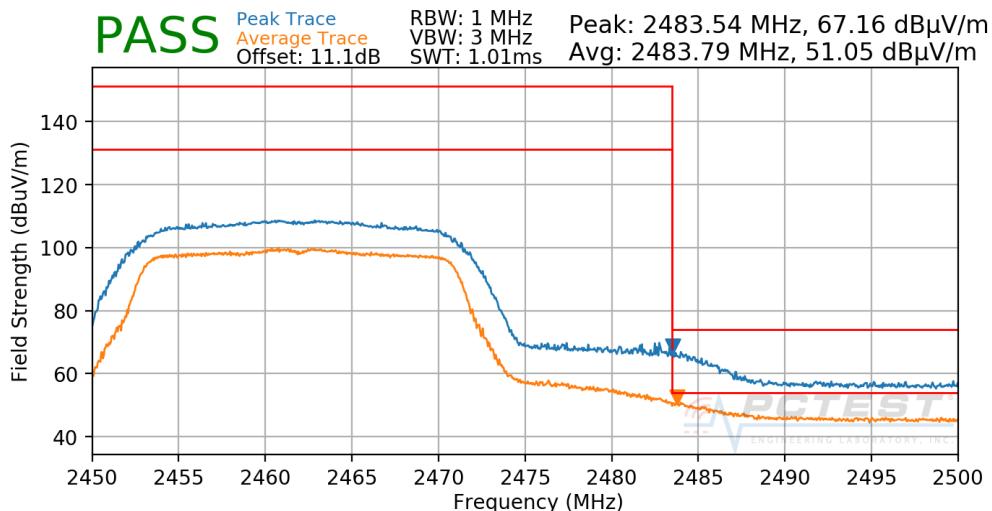

Plot 7-117. Radiated Restricted Upper Band Edge Measurement SISO CORE 1


FCC ID: BCGA2152	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1811080025-02.BCG	Test Dates: 11/09/2018-02/07/2019	EUT Type: Tablet Device		Page 91 of 104

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

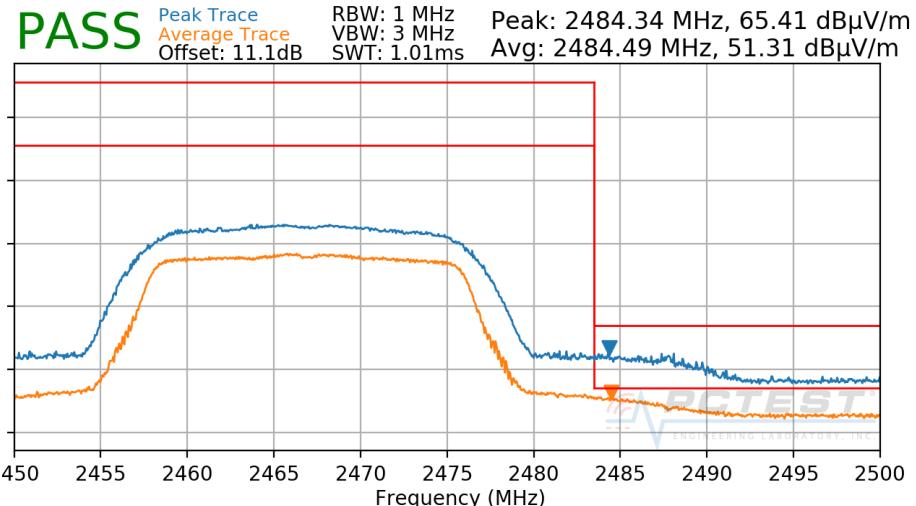

Plot 7-118. Radiated Restricted Upper Band Edge Measurement SISO CORE 1

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2472MHz
 Channel: 13

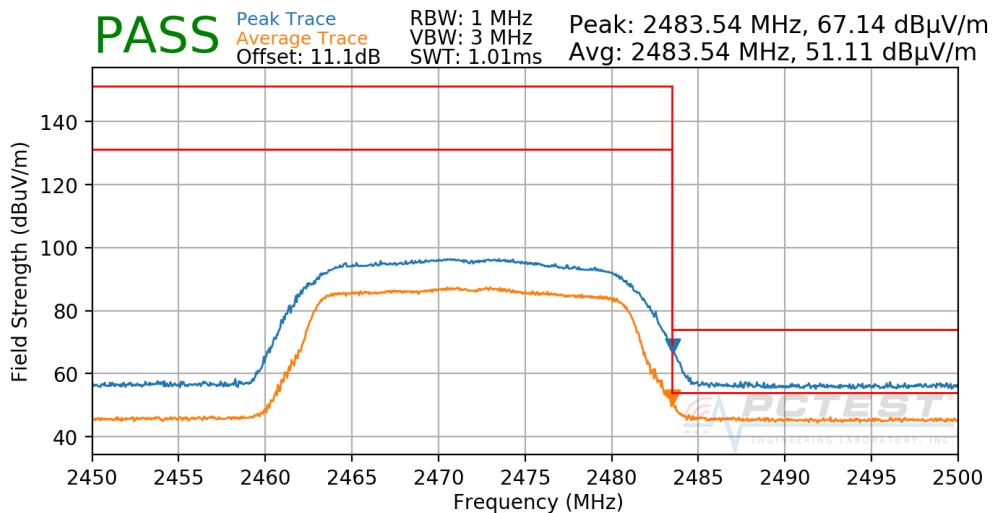

Plot 7-119. Radiated Restricted Upper Band Edge Measurement SISO CORE 1


FCC ID: BCGA2152	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1811080025-02.BCG	Test Dates: 11/09/2018-02/07/2019	EUT Type: Tablet Device		Page 92 of 104

7.7.6 CDD Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]


The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

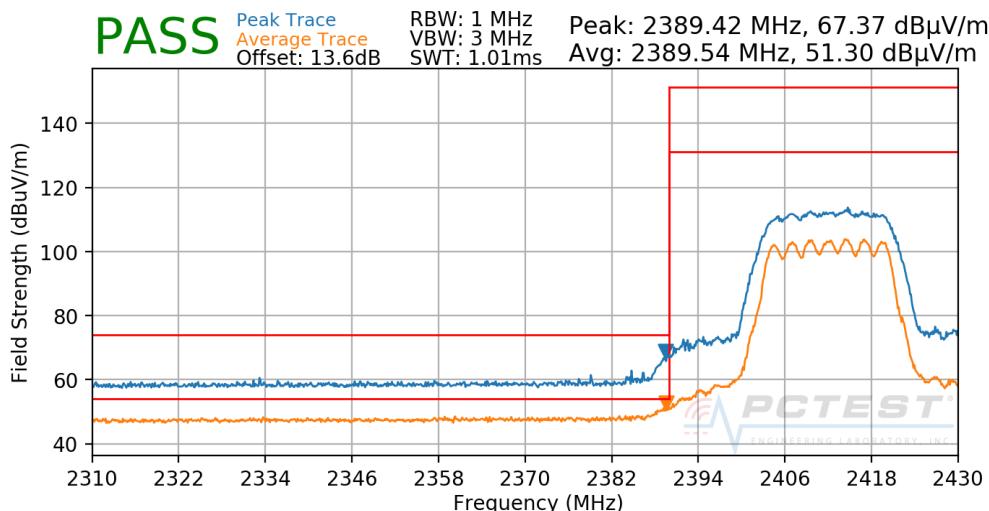

Plot 7-120. Radiated Restricted Lower Band Edge Measurement CDD


Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2417MHz
 Channel: 2

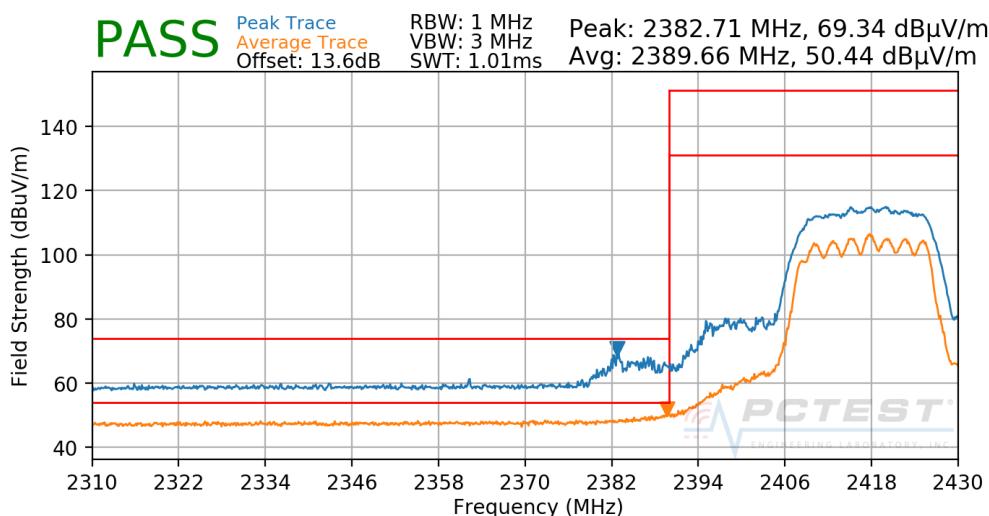

Plot 7-121. Radiated Restricted Lower Band Edge Measurement CDD


FCC ID: BCGA2152	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1811080025-02.BCG	Test Dates: 11/09/2018-02/07/2019	EUT Type: Tablet Device		Page 93 of 104

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2457MHz
 Channel: 10

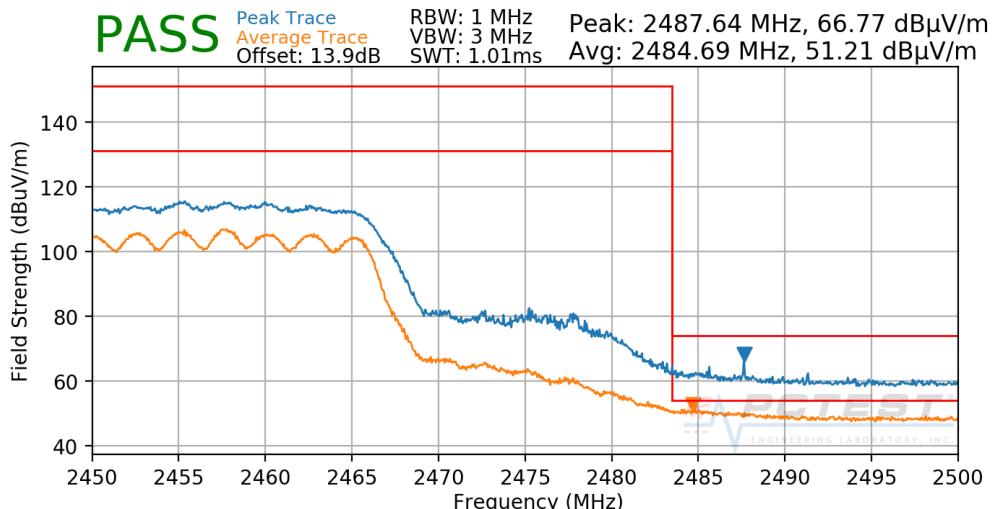

Plot 7-122. Radiated Restricted Upper Band Edge Measurement CDD


Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

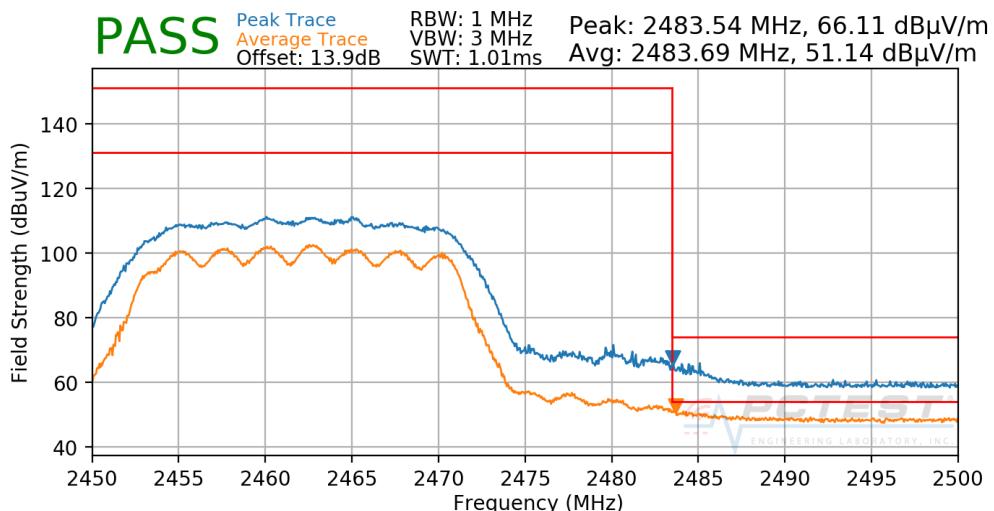

Plot 7-123. Radiated Restricted Upper Band Edge Measurement CDD


FCC ID: BCGA2152	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1811080025-02.BCG	Test Dates: 11/09/2018-02/07/2019	EUT Type: Tablet Device	Page 94 of 104	

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

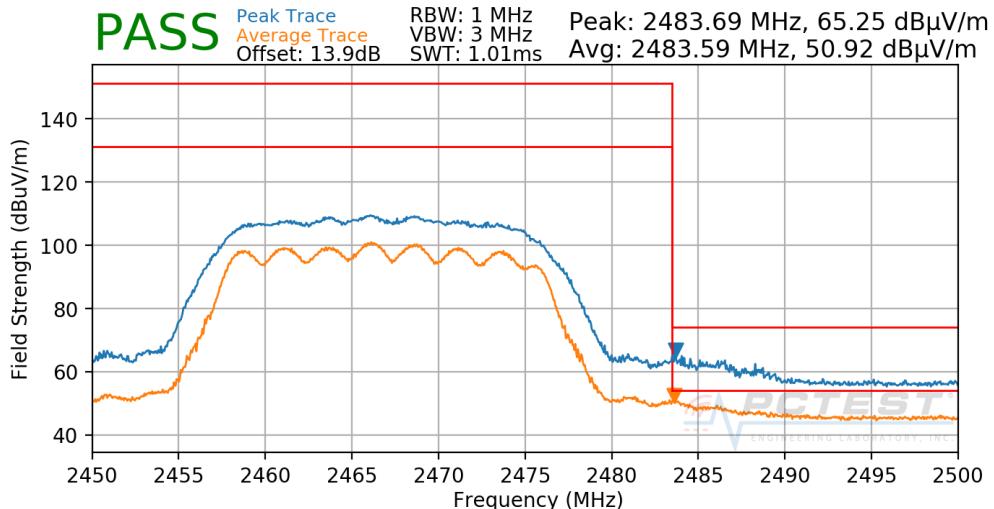

Plot 7-124. Radiated Restricted Upper Band Edge Measurement CDD

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2472MHz
 Channel: 13

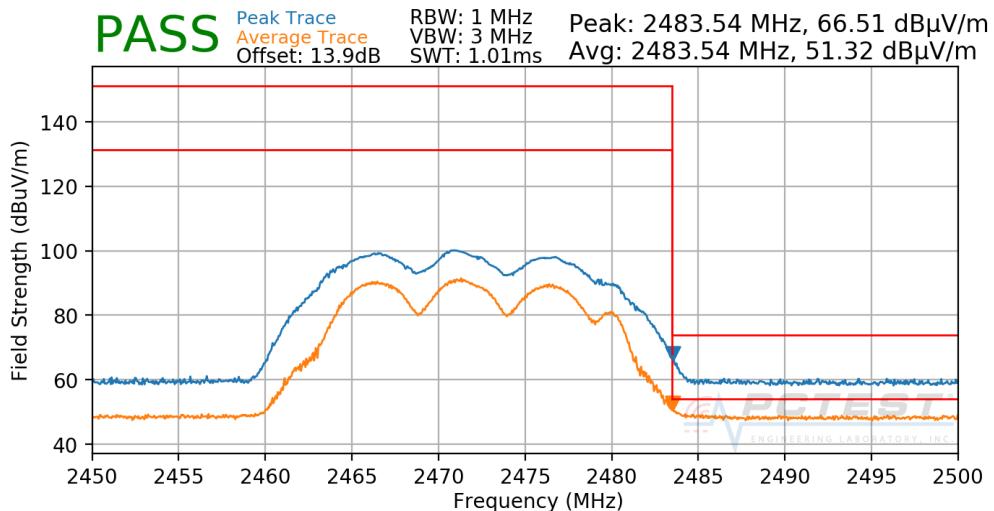

Plot 7-125. Radiated Restricted Upper Band Edge Measurement CDD

FCC ID: BCGA2152	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1811080025-02.BCG	Test Dates: 11/09/2018-02/07/2019	EUT Type: Tablet Device		Page 95 of 104

7.8 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-25 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-25. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA2152	 PCTEST ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080025-02.BCG	Test Dates: 11/09/2018-02/07/2019	EUT Type: Tablet Device	Page 96 of 104	

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

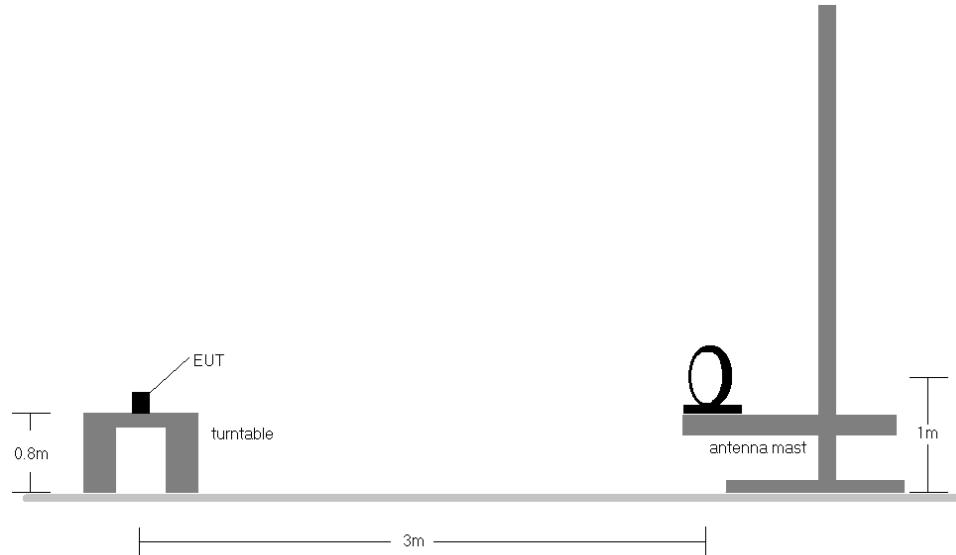


Figure 7-7. Radiated Test Setup < 30Mhz

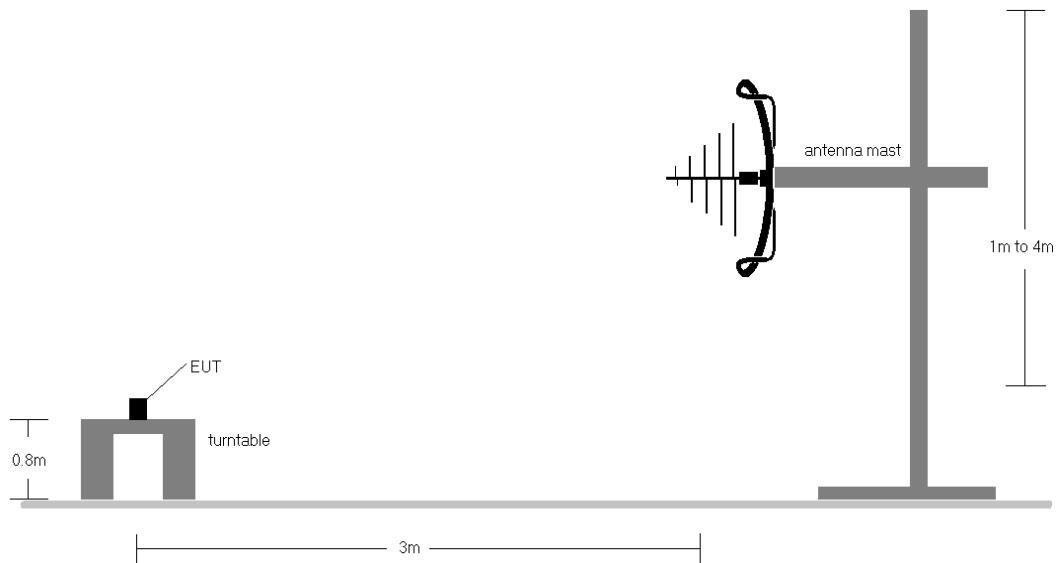


Figure 7-8. Radiated Test Setup < 1GHz

FCC ID: BCGA2152	 PCTEST® ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080025-02.BCG	Test Dates: 11/09/2018-02/07/2019	EUT Type: Tablet Device	Page 97 of 104


Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen(8.10) are below the limit shown in Table 7-25.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification.
10. All antenna configs were investigated and only the worst case is reported.

FCC ID: BCGA2152	 PCTEST® <small>ENGINEERING LABORATORY, INC.</small>		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1811080025-02.BCG	Test Dates: 11/09/2018-02/07/2019	EUT Type: Tablet Device	Page 98 of 104	

CDD Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

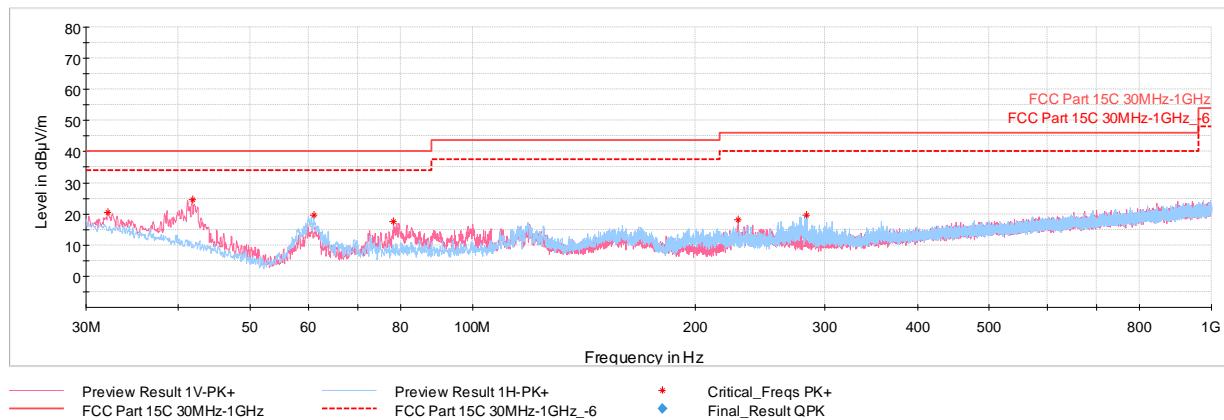

Plot 7-126. Radiated Spurious Plot below 1GHz 802.11n CDD Ch. 6 with Laptop

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
32.09	Peak	V	100	38	-78.87	-7.70	20.43	40.00	-19.57
41.79	Peak	V	100	25	-67.58	-14.84	24.58	40.00	-15.42
60.99	Peak	H	250	24	-69.44	-17.92	19.64	40.00	-20.36
78.21	Peak	V	100	187	-76.13	-13.43	17.44	40.00	-22.56
228.85	Peak	V	100	127	-74.94	-13.91	18.15	46.02	-27.87
283.27	Peak	H	100	240	-73.52	-13.76	19.71	46.02	-26.31

Table 7-26. Radiated Spurious Emissions below 1GHz 802.11n CDD Ch. 6 with Laptop

FCC ID: BCGA2152	 MEASUREMENT REPORT (CERTIFICATION)				Approved by: Quality Manager
Test Report S/N: 1C1811080025-02.BCG	Test Dates: 11/09/2018-02/07/2019	EUT Type: Tablet Device			Page 99 of 104

7.9 AC Line-Conducted Test Data

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-27. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA2152	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1811080025-02.BCG	Test Dates: 11/09/2018-02/07/2019	EUT Type: Tablet Device	Page 100 of 104

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


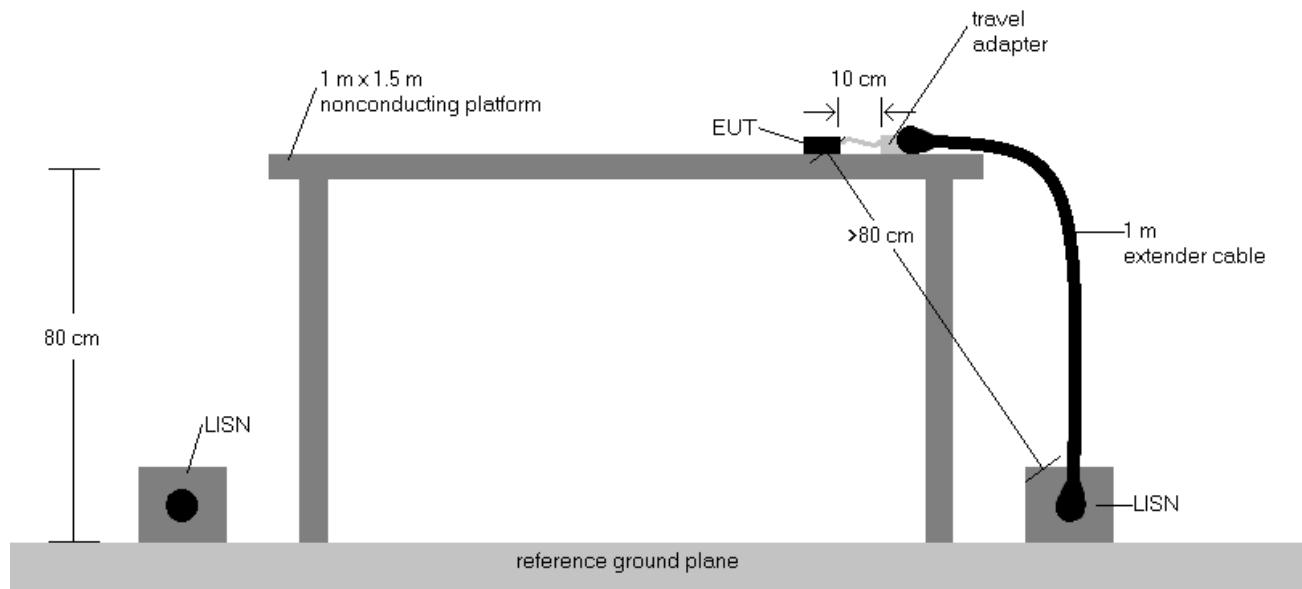


Figure 7-9. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
3. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
4. QP/AV Level (dB μ V) = QP/AV Analyzer/Receiver Level (dB μ V) + Corr. (dB)
5. Margin (dB) = QP/AV Limit (dB μ V) - QP/AV Level (dB μ V)
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: BCGA2152	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1811080025-02.BCG	Test Dates: 11/09/2018-02/07/2019	EUT Type: Tablet Device	Page 101 of 104

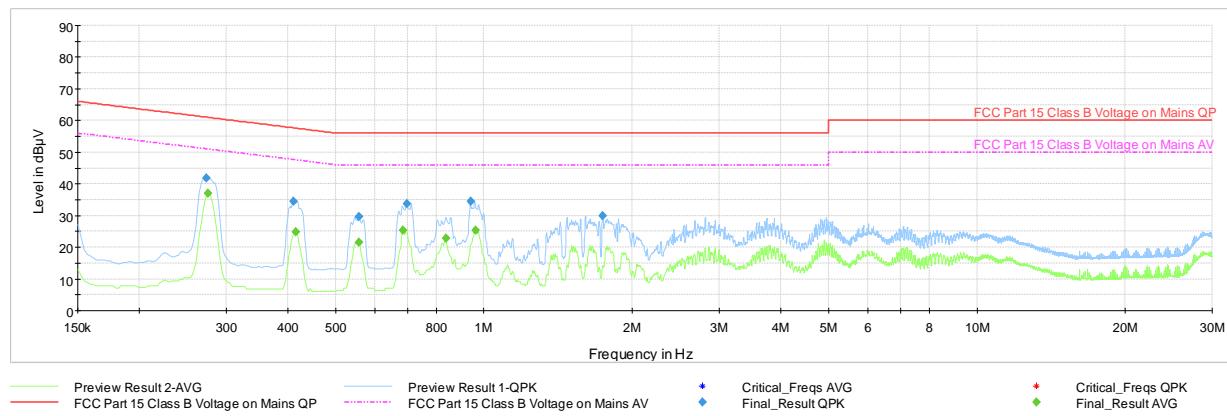


Plot 7-127. Line Conducted Plot with 802.11n CDD Ch.6 (L1, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.274	FINAL	41.8	—	61.00	-19.16	L1	GND
0.276	FINAL	—	37.11	50.94	-13.83	L1	GND
0.411	FINAL	34.6	—	57.63	-23.07	L1	GND
0.416	FINAL	—	24.78	47.54	-22.76	L1	GND
0.557	FINAL	29.7	—	56.00	-26.33	L1	GND
0.557	FINAL	—	21.50	46.00	-24.50	L1	GND
0.686	FINAL	—	25.29	46.00	-20.71	L1	GND
0.697	FINAL	33.8	—	56.00	-22.19	L1	GND
0.836	FINAL	—	22.75	46.00	-23.25	L1	GND
0.940	FINAL	34.4	—	56.00	-21.55	L1	GND
0.960	FINAL	—	25.38	46.00	-20.62	L1	GND
1.741	FINAL	30.0	—	56.00	-25.98	L1	GND

Table 7-28. Line Conducted Measurements with 802.11n CDD Ch.6 (L1, with AC/DC Adapter)

FCC ID: BCGA2152	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1811080025-02.BCG	Test Dates: 11/09/2018-02/07/2019	EUT Type: Tablet Device	Page 102 of 104	

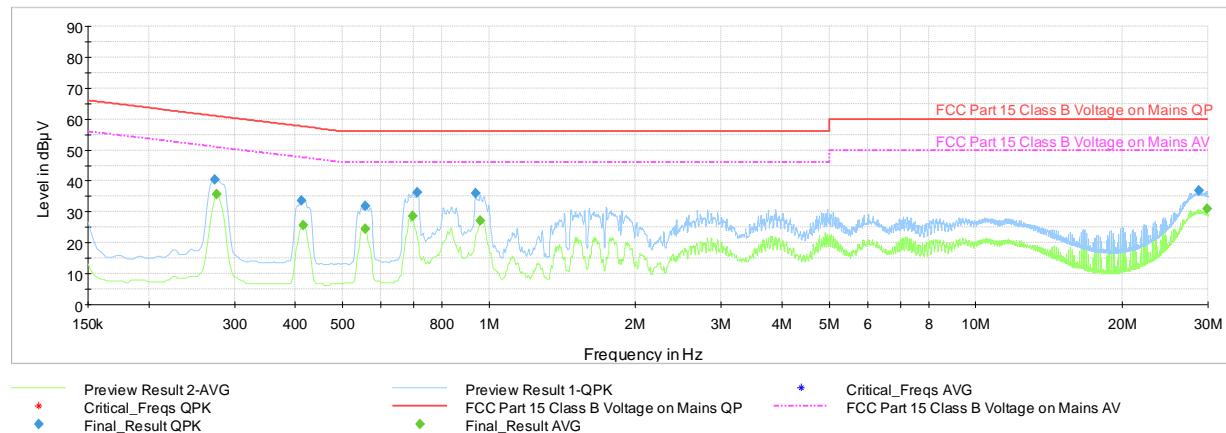

Plot 7-128. Line Conducted Plot with 802.11n CDD Ch.6 (N, WITH AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dB μ V]	Average [dB μ V]	Limit [dB μ V]	Margin [dB]	Line	PE
0.274	FINAL	40.4	—	61.00	-20.65	N	GND
0.276	FINAL	—	35.77	50.94	-15.17	N	GND
0.411	FINAL	33.7	—	57.63	-23.93	N	GND
0.416	FINAL	—	25.81	47.54	-21.73	N	GND
0.557	FINAL	31.9	—	56.00	-24.09	N	GND
0.557	FINAL	—	24.55	46.00	-21.45	N	GND
0.697	FINAL	—	28.71	46.00	-17.29	N	GND
0.713	FINAL	36.4	—	56.00	-19.58	N	GND
0.940	FINAL	36.0	—	56.00	-20.02	N	GND
0.960	FINAL	—	27.18	46.00	-18.82	N	GND
28.784	FINAL	36.7	—	60.00	-23.26	N	GND
29.904	FINAL	—	30.90	50.00	-19.10	N	GND

Table 7-29. Line Conducted Measurements with 802.11n CDD Ch.6 (N, with AC/DC Adapter)

FCC ID: BCGA2152	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1811080025-02.BCG	Test Dates: 11/09/2018-02/07/2019	EUT Type: Tablet Device	Page 103 of 104	

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA2152** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA2152	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1811080025-02.BCG	Test Dates: 11/09/2018-02/07/2019	EUT Type: Tablet Device	Page 104 of 104