


Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5795MHz
 Channel: 159

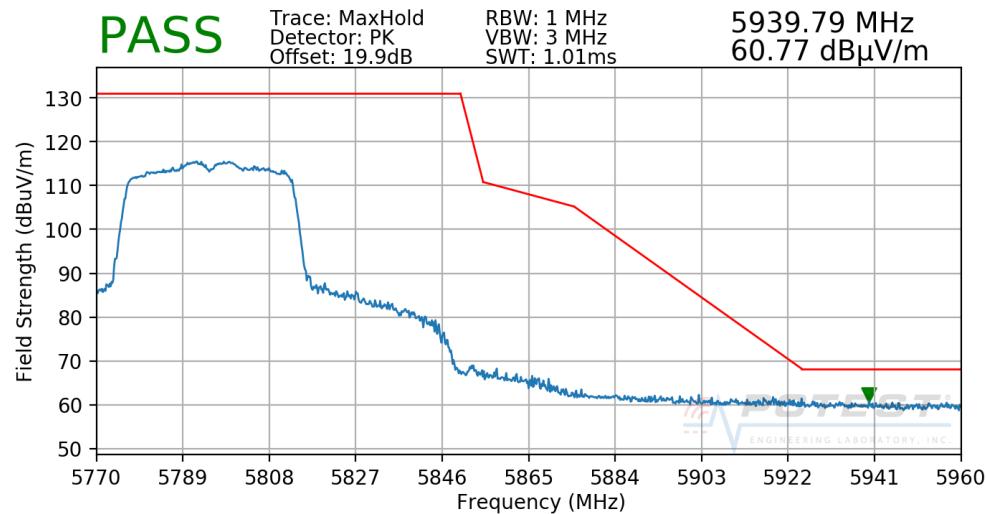


Plot 7-250. Radiated Upper Band Edge Plot SISO CORE1 (Peak – UNII Band 3)

FCC ID: BCGA2230	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1912170052-12.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 181 of 207	

7.6.9 SISO Core-1 Radiated Band Edge Measurements (80MHz BW)


§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5210MHz
 Channel: 42

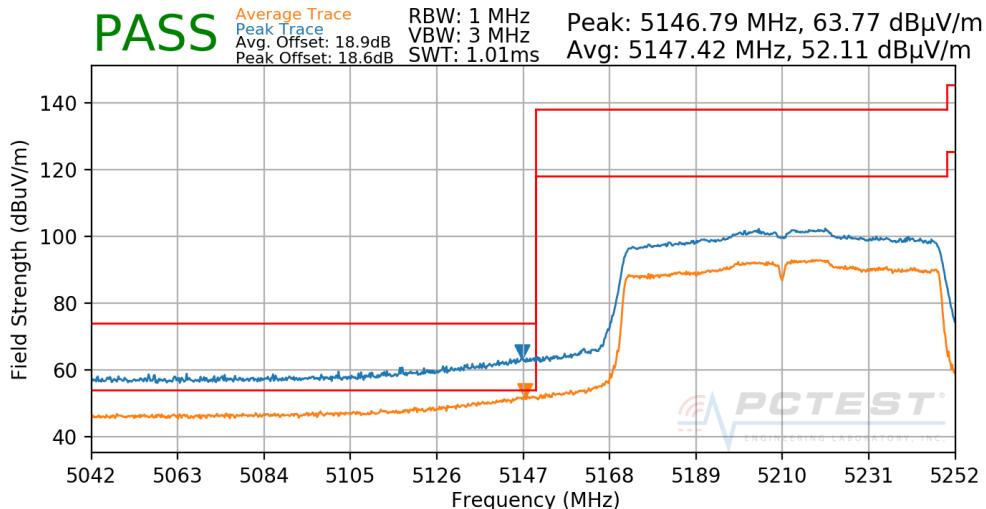

Plot 7-251. Radiated Lower Band Edge Plot SISO CORE1 (UNII Band 1)

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5290MHz
 Channel: 58

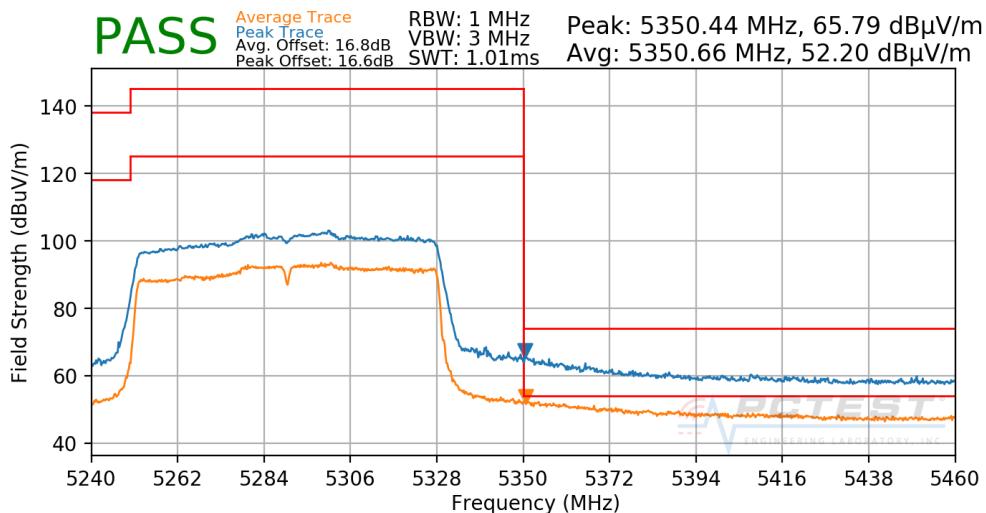


Plot 7-252. Radiated Upper Band Edge Plot SISO CORE1 (UNII Band 2A)

FCC ID: BCGA2230	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1912170052-12.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 182 of 207	

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5530MHz
 Channel: 106


PASS Average Trace
Peak Trace
Avg. Offset: 19.5dB
Peak Offset: 19.3dB RBW: 1 MHz
VBW: 3 MHz
SWT: 1.01ms Peak: 5465.46 MHz, 65.62 dB μ V/m
Avg: 5459.49 MHz, 51.07 dB μ V/m

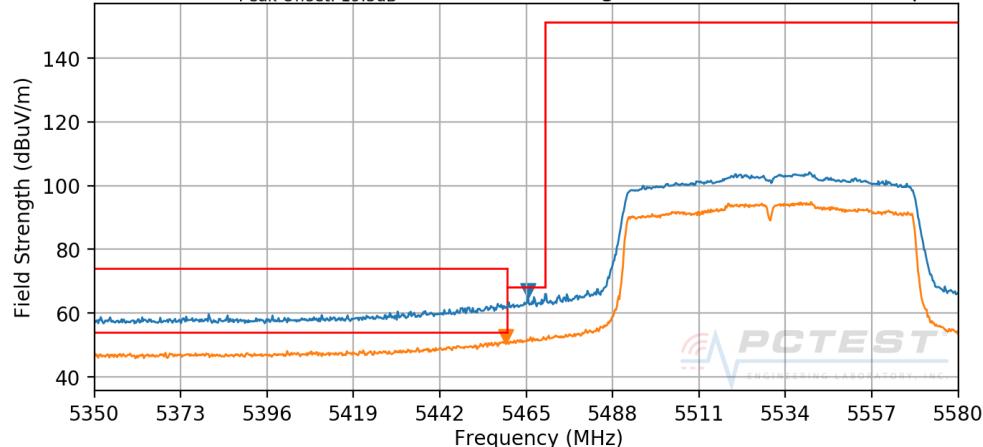

Plot 7-253. Radiated Lower Band Edge Plot SISO CORE1 (UNII Band 2C)

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5775MHz
 Channel: 155


PASS Trace: MaxHold
Detector: PK
Offset: 19.9dB RBW: 1 MHz
VBW: 3 MHz
SWT: 1.01ms 5644.08 MHz
65.28 dB μ V/m

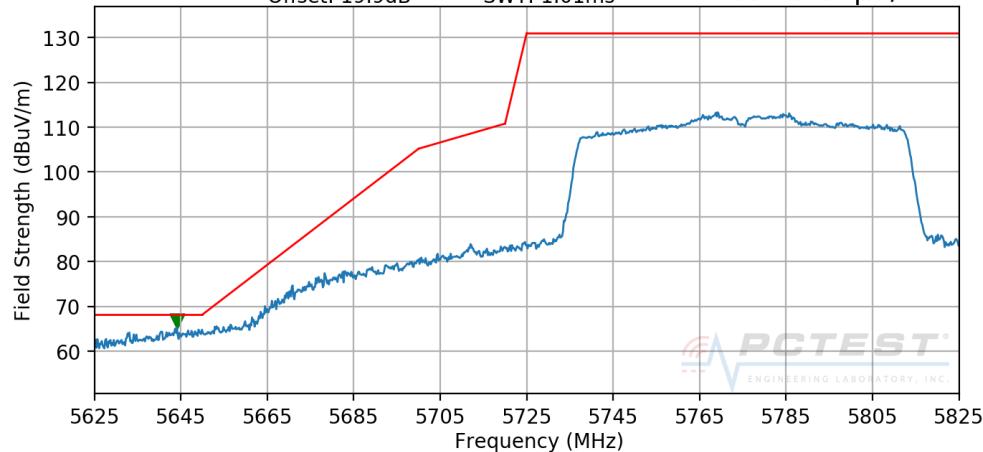

Plot 7-254. Radiated Lower Band Edge Plot SISO CORE1 (Peak – UNII Band 3)

FCC ID: BCGA2230	PCTEST MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1912170052-12.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 183 of 207	

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5775MHz
 Channel: 155

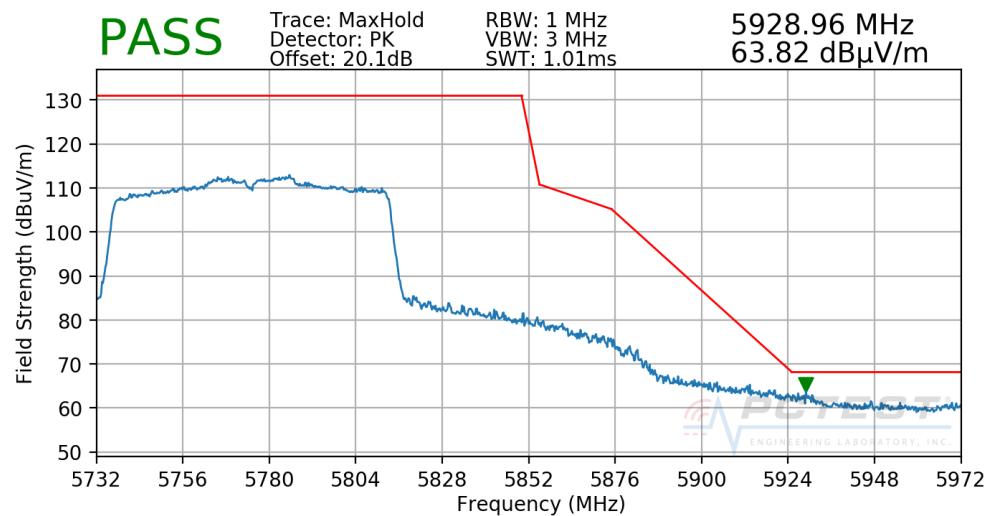


Plot 7-255. Radiated Upper Band Edge Plot SISO CORE1 (Peak – UNII Band 3)

FCC ID: BCGA2230	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1912170052-12.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 184 of 207	

7.6.10 CDD Radiated Band Edge Measurements (20MHz BW)


§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]; RSS-Gen [8.9]

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36

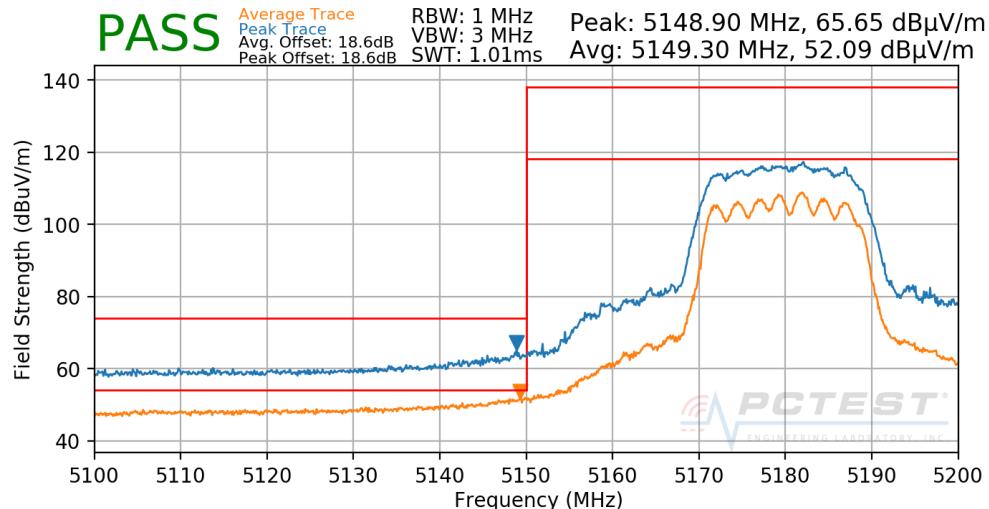

Plot 7-256. Radiated Lower Band Edge Plot CDD (UNII Band 1)


Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5200MHz
 Channel: 40

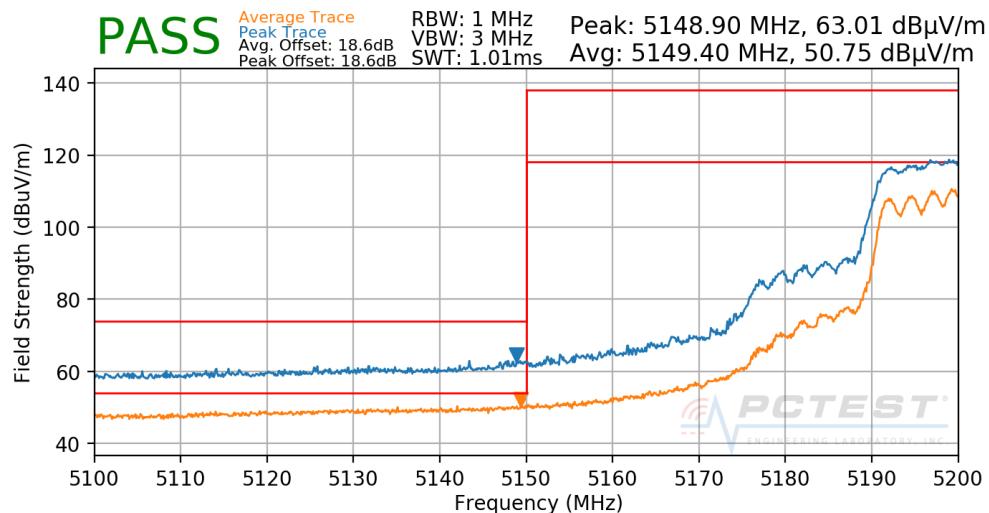

Plot 7-257. Radiated Lower Band Edge Plot CDD (UNII Band 1)


FCC ID: BCGA2230	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-12.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 185 of 207

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5300MHz
 Channel: 60

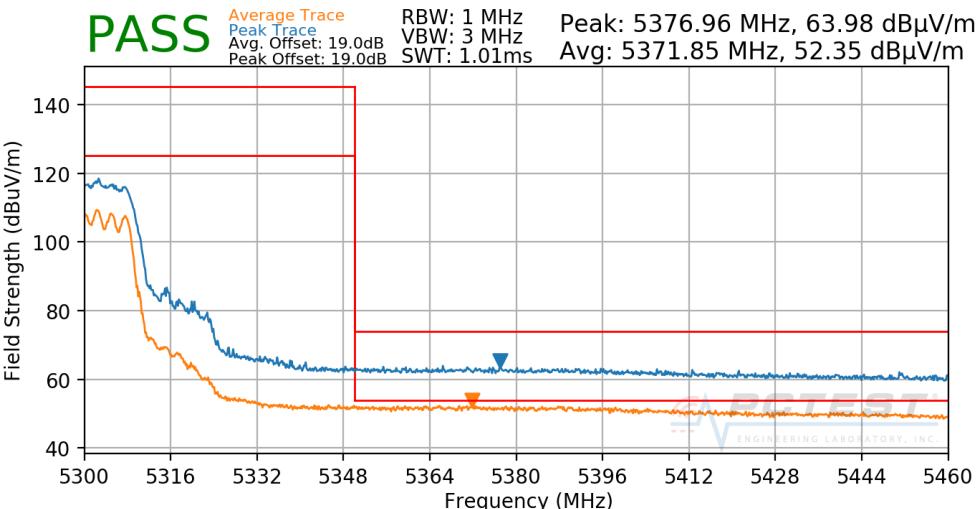

Plot 7-258. Radiated Upper Band Edge Plot CDD (UNII Band 2A)


Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

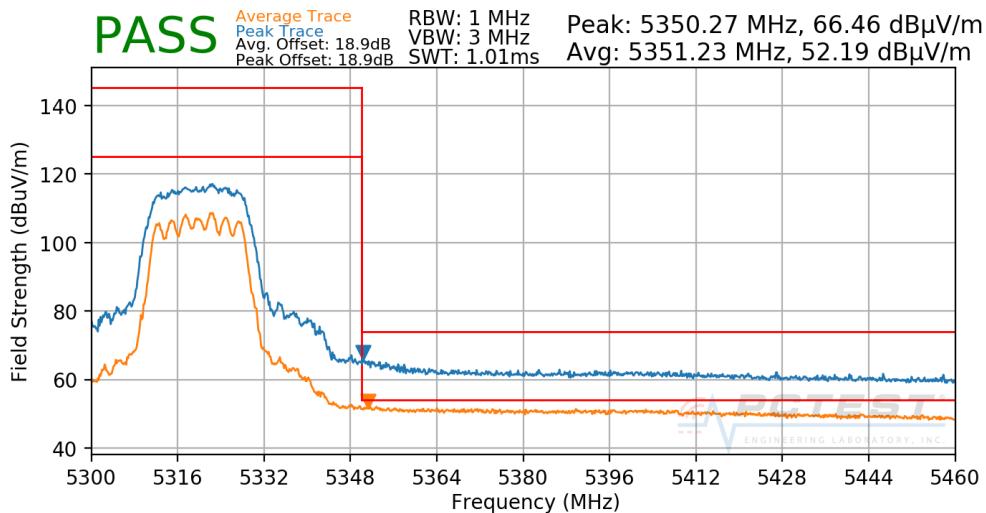

Plot 7-259. Radiated Upper Band Edge Plot CDD (UNII Band 2A)


FCC ID: BCGA2230	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-12.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 186 of 207

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

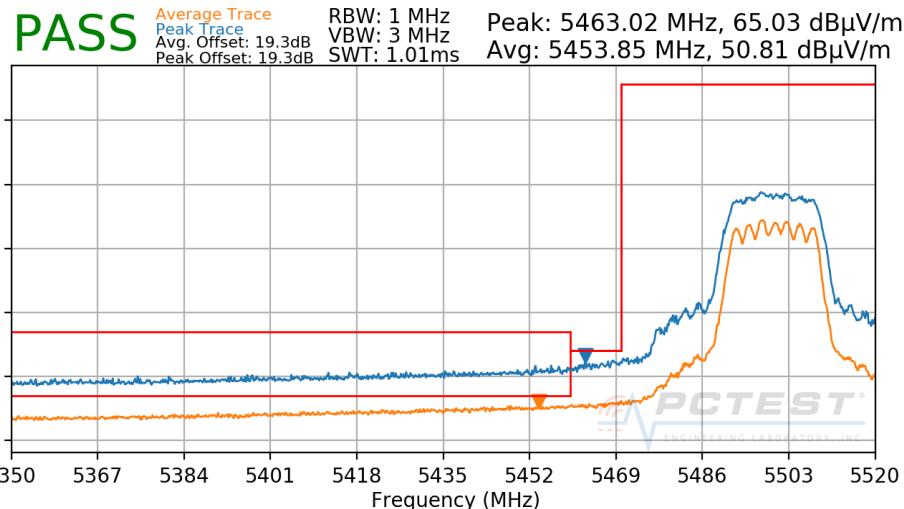

Plot 7-260. Radiated Lower Band Edge Plot CDD (UNII Band 2C)


Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5520MHz
 Channel: 104

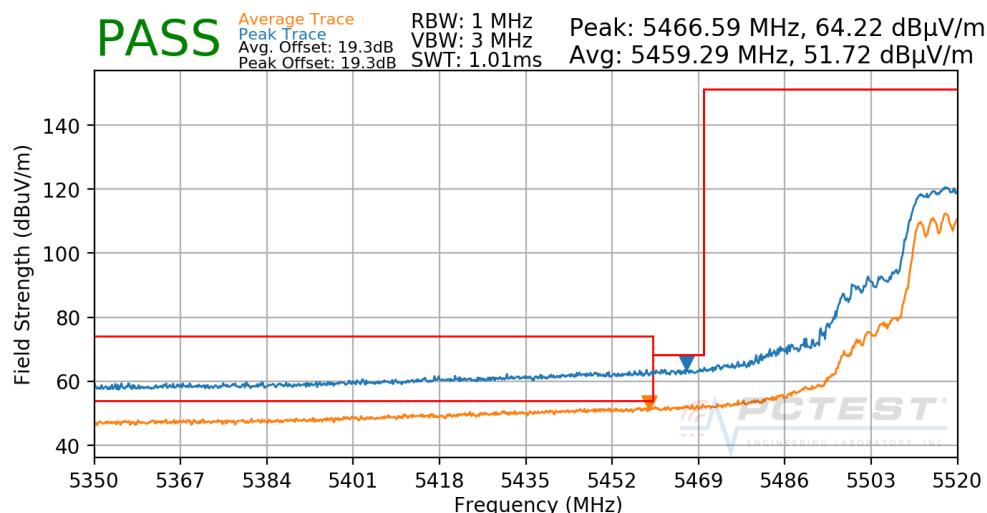

Plot 7-261. Radiated Lower Band Edge Plot CDD (Peak – UNII Band 2C)


FCC ID: BCGA2230	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1912170052-12.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 187 of 207	

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5660MHz
 Channel: 132

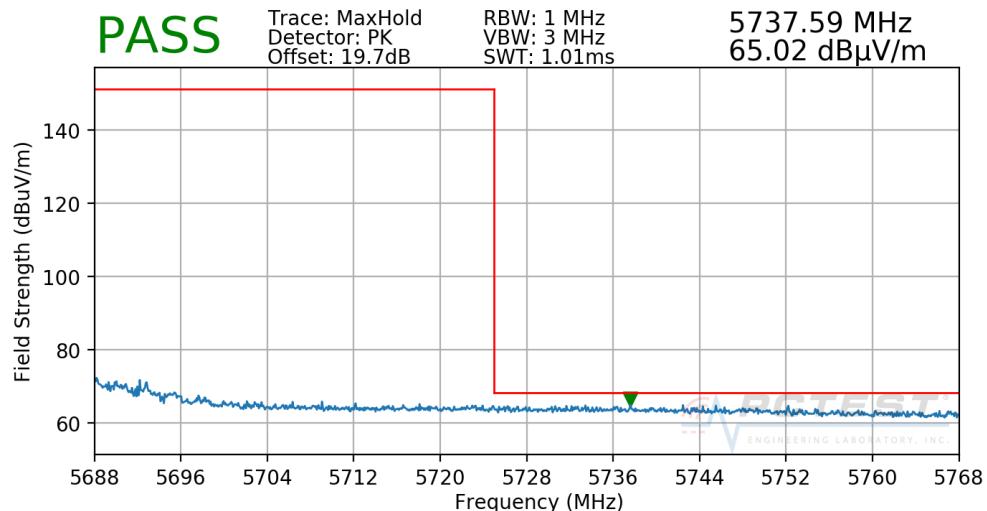

Plot 7-262. Radiated Upper Band Edge Plot CDD (Peak – UNII Band 2C)


Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5680MHz
 Channel: 136

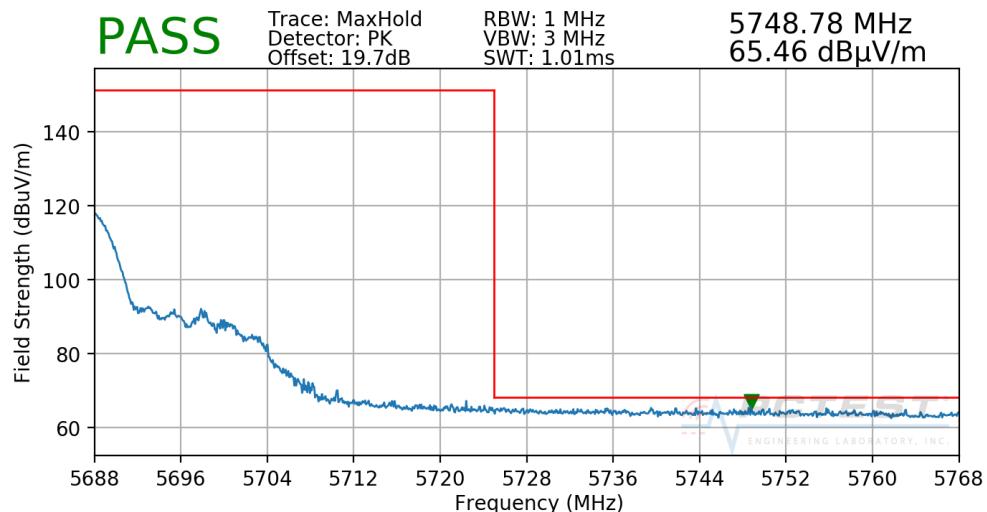

Plot 7-263. Radiated Upper Band Edge Plot CDD (Peak – UNII Band 2C)


FCC ID: BCGA2230	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1912170052-12.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 188 of 207	

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5700MHz
 Channel: 140

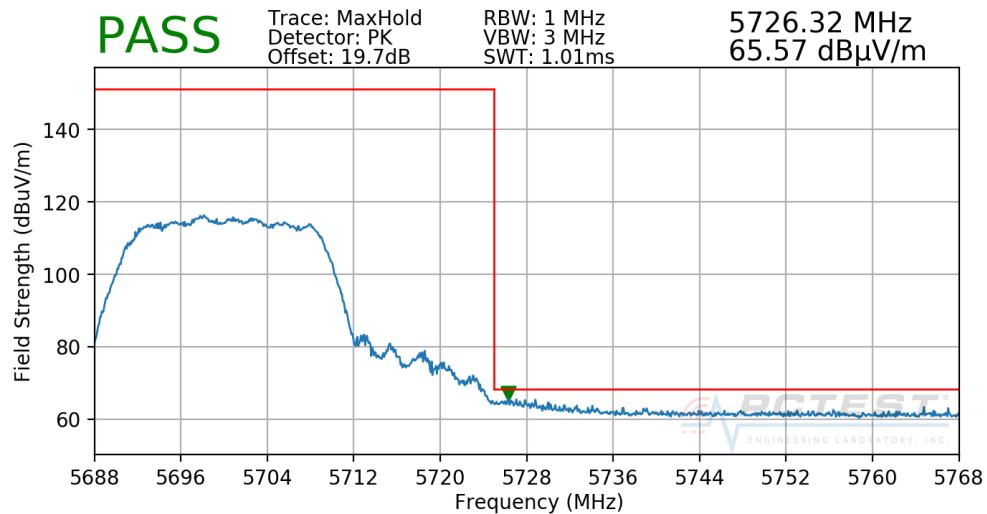

Plot 7-264. Radiated Upper Band Edge Plot CDD (Peak – UNII Band 2C)


Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5745MHz
 Channel: 149

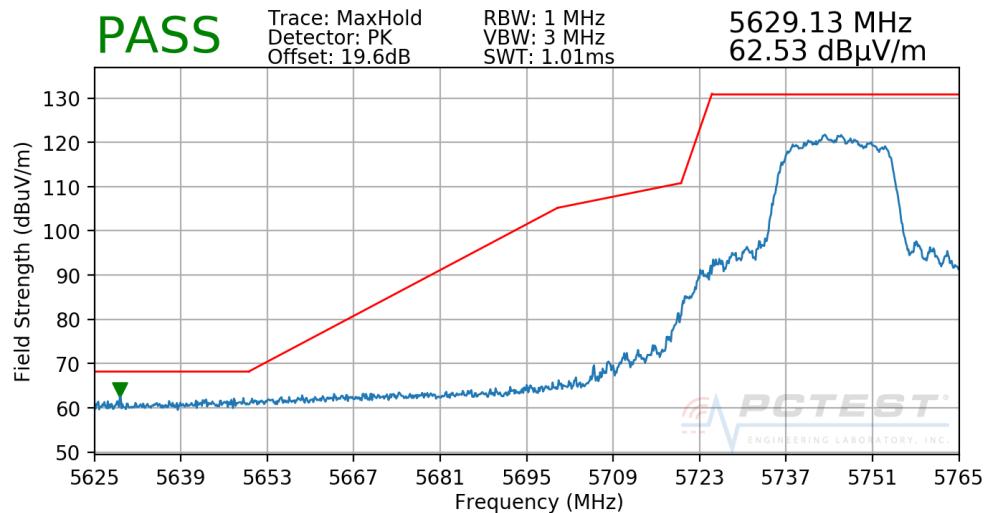

Plot 7-265. Radiated Lower Band Edge Plot CDD (Peak – UNII Band 3)

FCC ID: BCGA2230	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-12.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 189 of 207

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

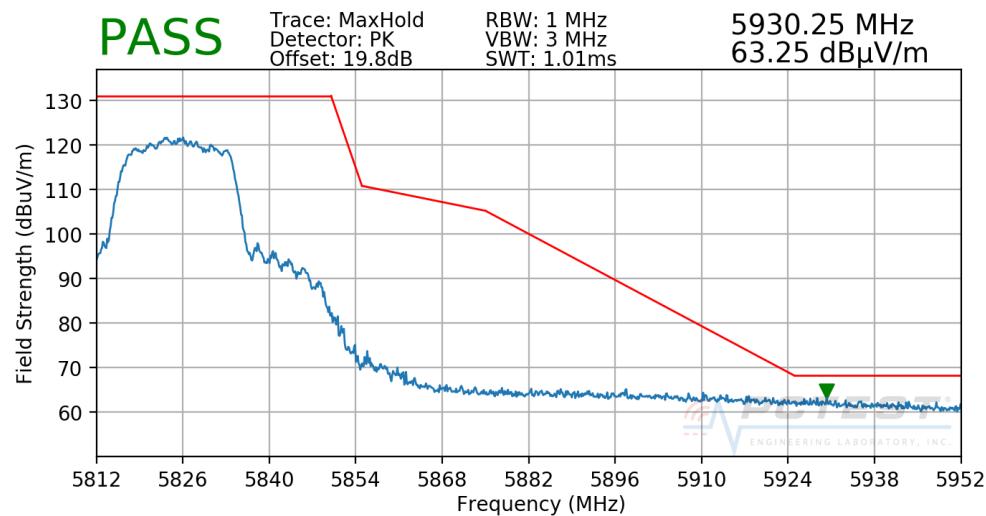


Plot 7-266. Radiated Upper Band Edge Plot CDD (Peak – UNII Band 3)

FCC ID: BCGA2230	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-12.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 190 of 207

7.6.11 CDD Radiated Band Edge Measurements (40MHz BW)


§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5190MHz
 Channel: 38

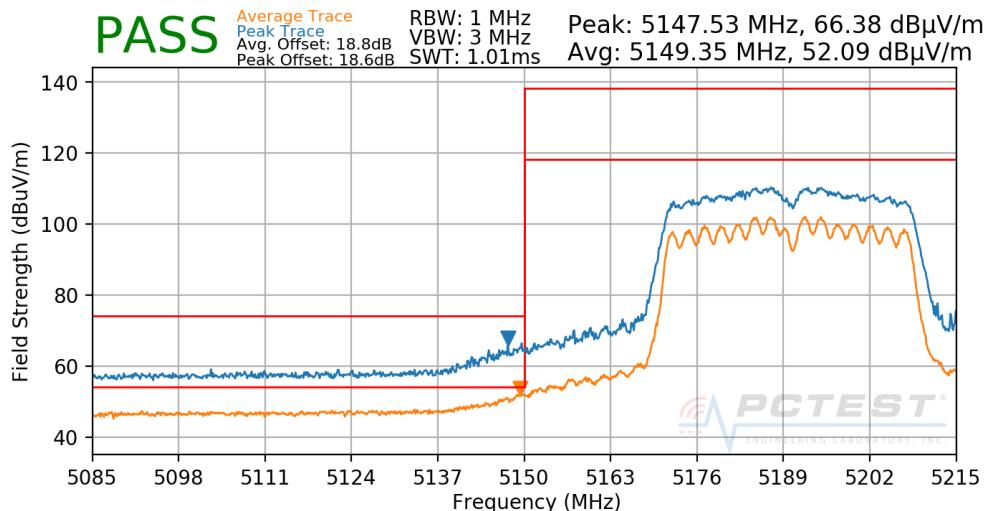

Plot 7-267. Radiated Lower Band Edge Plot CDD (UNII Band 1)


Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5230MHz
 Channel: 46

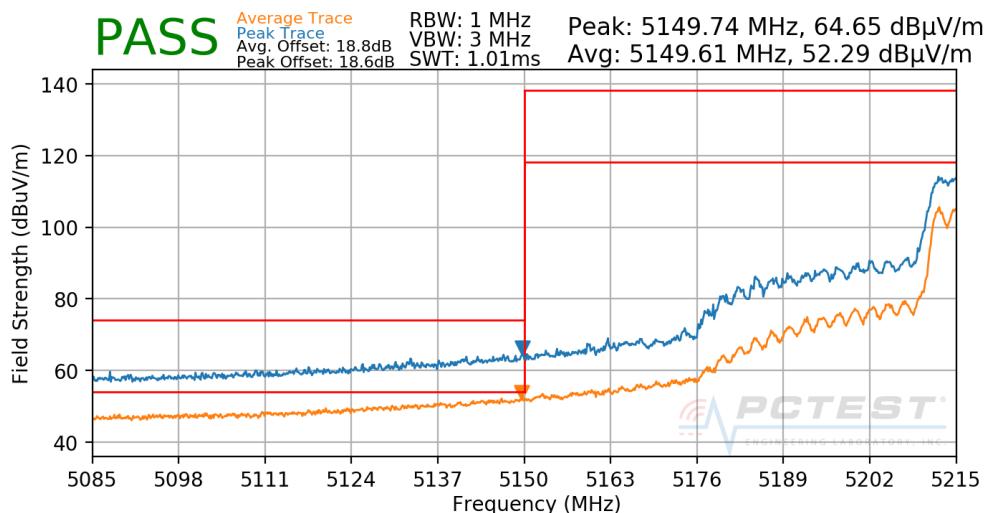

Plot 7-268. Radiated Lower Band Edge Plot CDD (UNII Band 1)


FCC ID: BCGA2230	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-12.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 191 of 207

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5270MHz
 Channel: 54

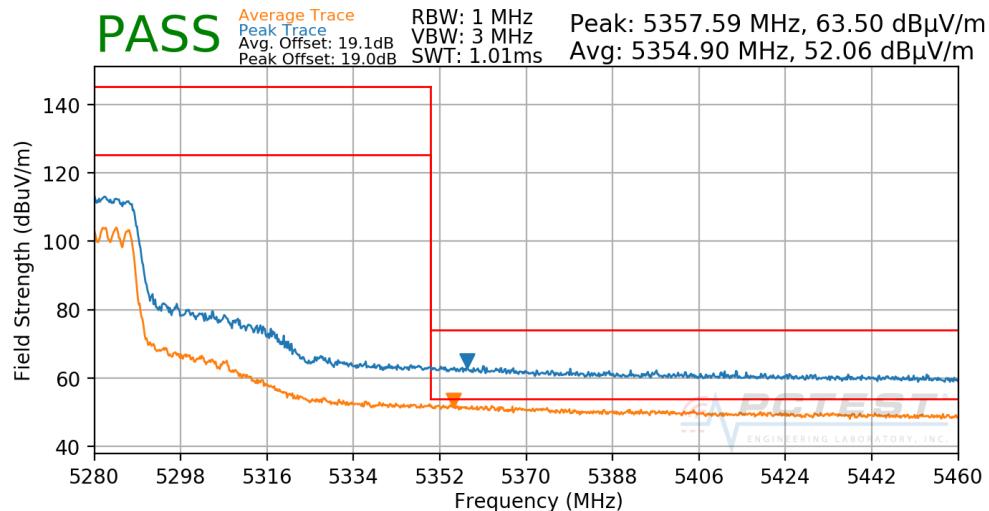

Plot 7-269. Radiated Upper Band Edge Plot CDD (UNII Band 2A)


Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5310MHz
 Channel: 62

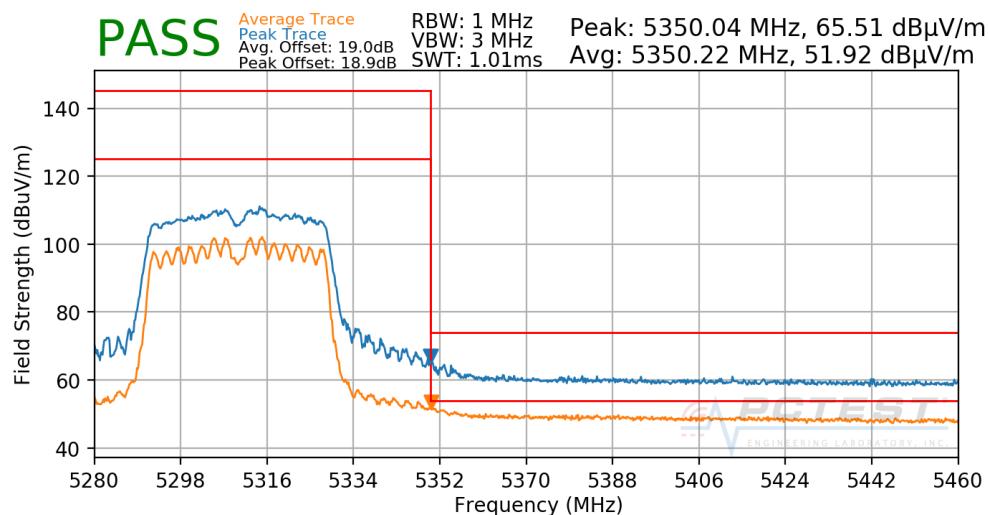

Plot 7-270. Radiated Upper Band Edge Plot CDD (UNII Band 2A)


FCC ID: BCGA2230	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-12.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 192 of 207

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5510MHz
 Channel: 102

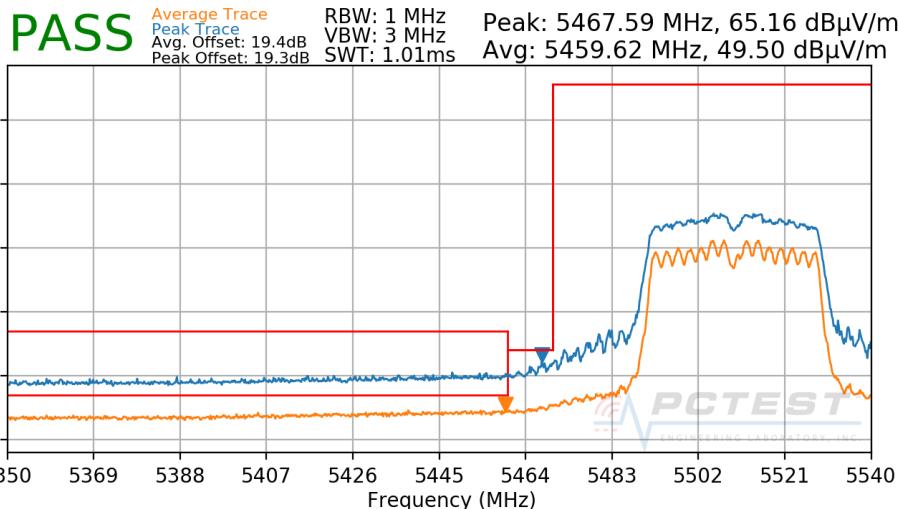

Plot 7-271. Radiated Lower Band Edge Plot CDD (UNII Band 2C)


Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5550MHz
 Channel: 110

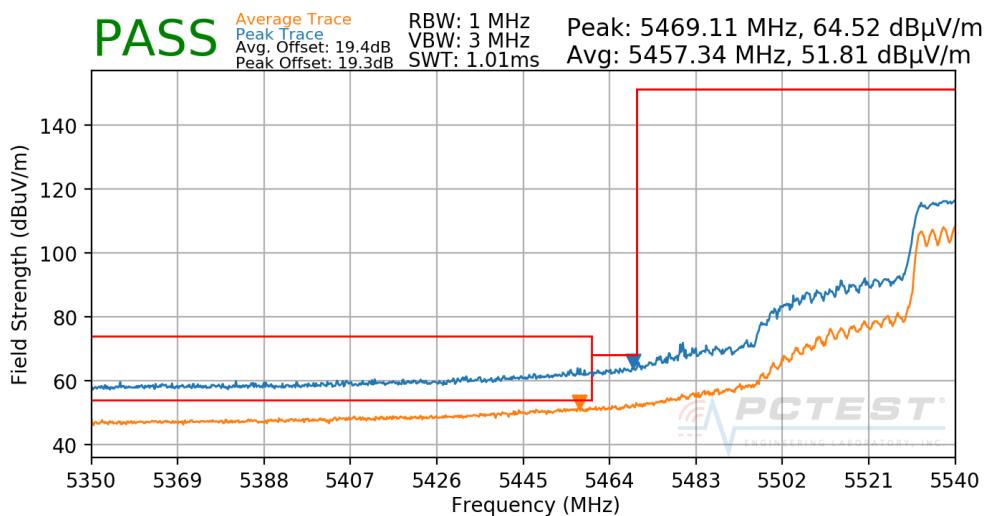

Plot 7-272. Radiated Lower Band Edge Plot CDD (Peak - UNII Band 2C)


FCC ID: BCGA2230	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1912170052-12.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 193 of 207	

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5670MHz
 Channel: 134

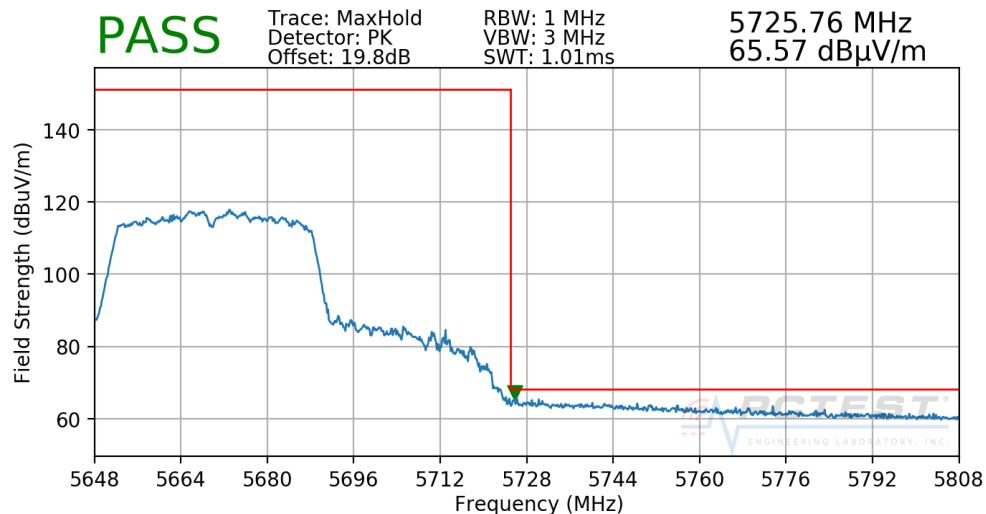

Plot 7-273. Radiated Upper Band Edge Plot CDD (Peak - UNII Band 2C)


Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5755MHz
 Channel: 151

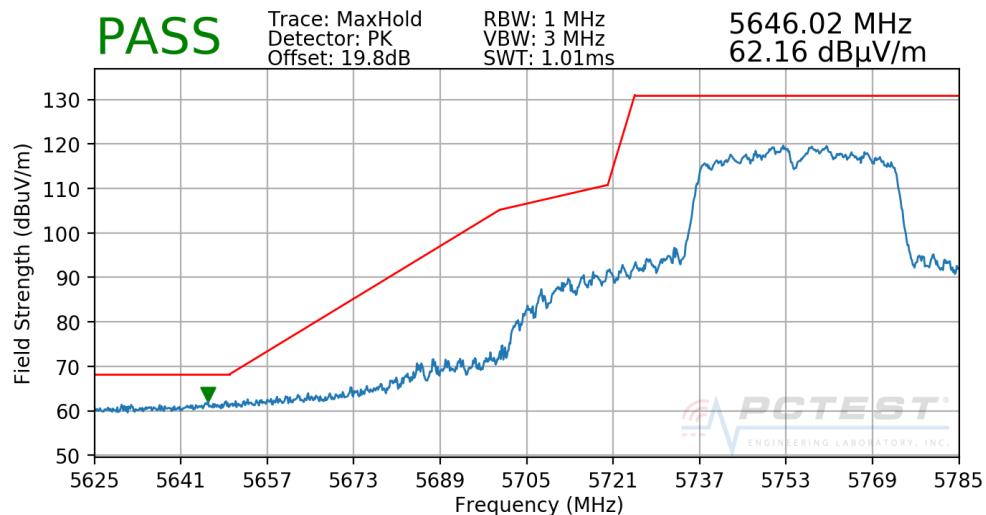

Plot 7-274. Radiated Lower Band Edge Plot CDD (Peak – UNII Band 3)

FCC ID: BCGA2230	PCTEST MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1912170052-12.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 194 of 207	

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5795MHz
 Channel: 159

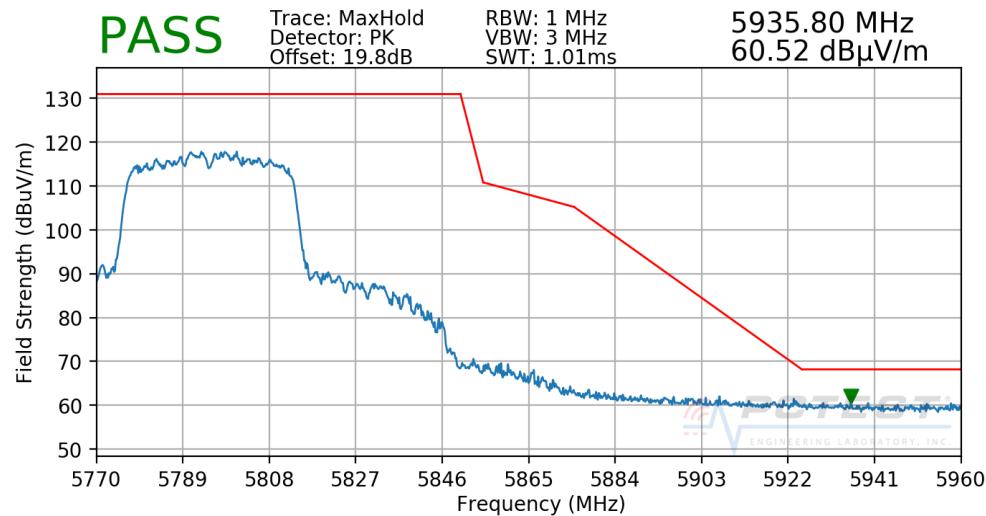


Plot 7-275. Radiated Upper Band Edge Plot CDD (Peak – UNII Band 3)

FCC ID: BCGA2230	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1912170052-12.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 195 of 207	
© 2020 PCTEST				V 9.5 12/16/2019

7.6.12 CDD Radiated Band Edge Measurements (80MHz BW)


§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5210MHz
 Channel: 42

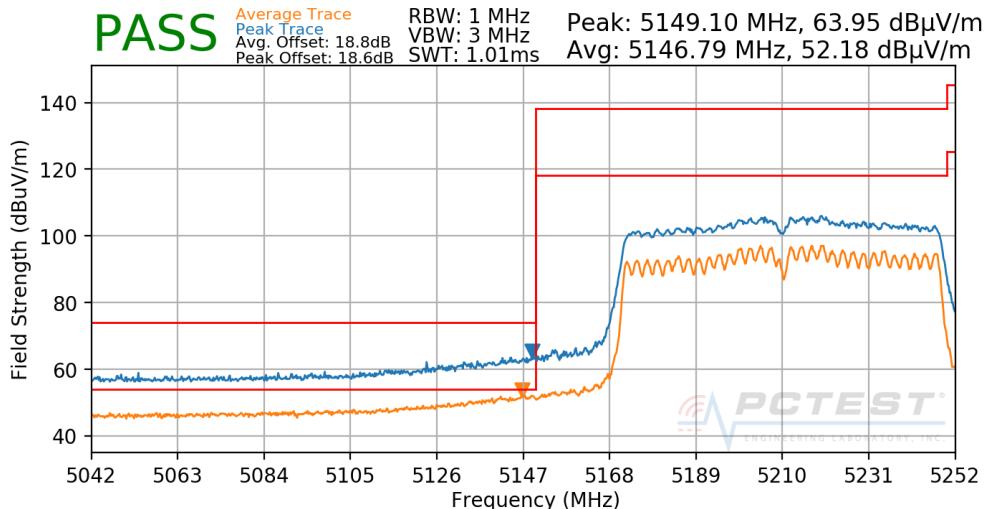

Plot 7-276. Radiated Lower Band Edge Plot CDD (UNII Band 1)

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5290MHz
 Channel: 58

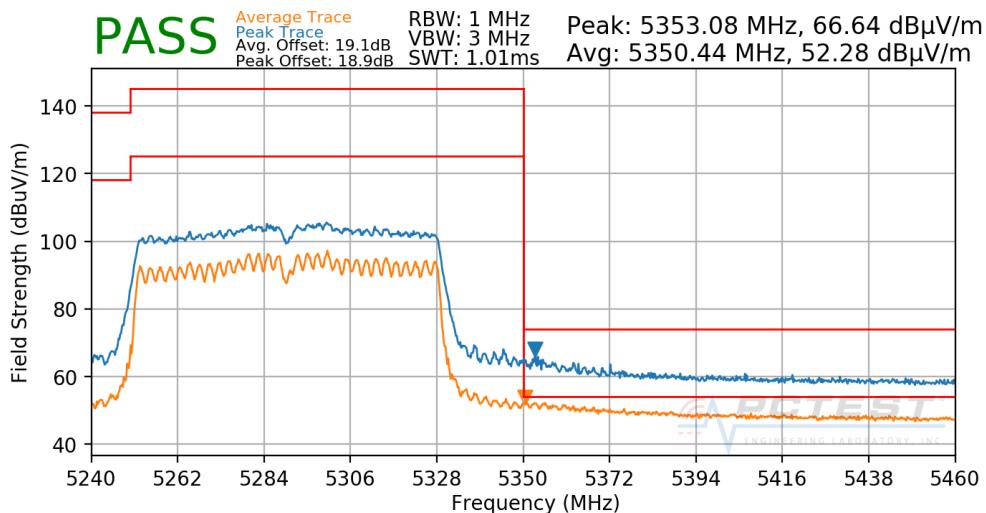


Plot 7-277. Radiated Upper Band Edge Plot CDD (UNII Band 2A)

FCC ID: BCGA2230	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1912170052-12.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 196 of 207	

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5530MHz
 Channel: 106


PASS Average Trace
Peak Trace
Avg. Offset: 19.3dB
Peak Offset: 19.3dB
RBW: 1 MHz
VBW: 3 MHz
SWT: 1.01ms Peak: 5469.83 MHz, 65.03 dB μ V/m
Avg: 5456.50 MHz, 50.92 dB μ V/m

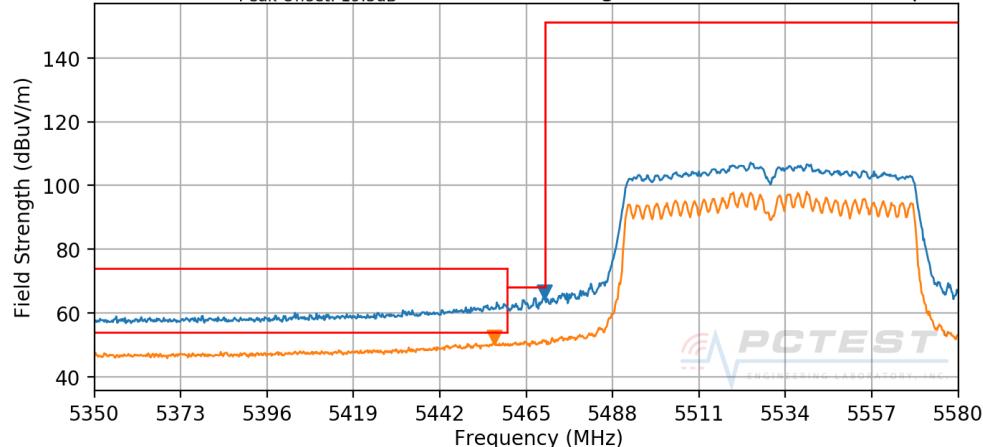

Plot 7-278. Radiated Lower Band Edge Plot CDD (UNII Band 2C)

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5775MHz
 Channel: 155


PASS Trace: MaxHold
Detector: PK
Offset: 19.8dB
RBW: 1 MHz
VBW: 3 MHz
SWT: 1.01ms 5647.88 MHz
65.35 dB μ V/m

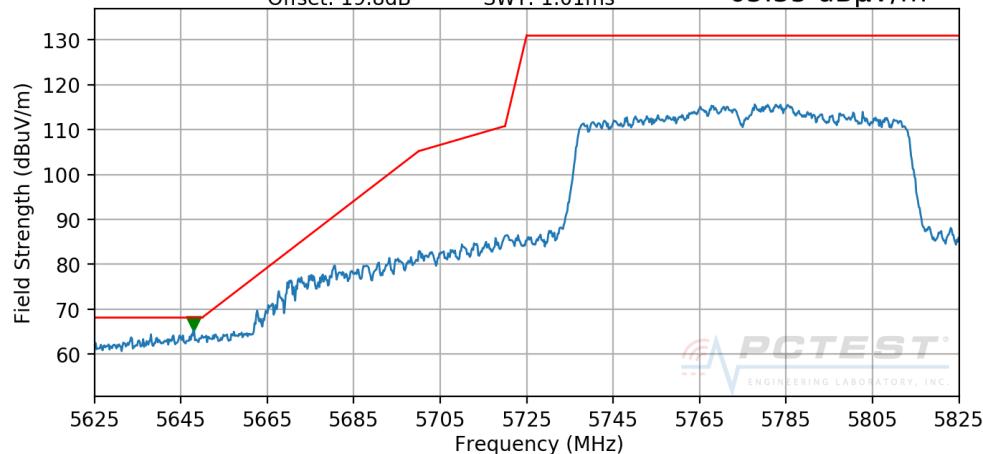

Plot 7-279. Radiated Lower Band Edge Plot CDD (Peak – UNII Band 3)

FCC ID: BCGA2230	PCTEST MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-12.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 197 of 207

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5775MHz
 Channel: 155

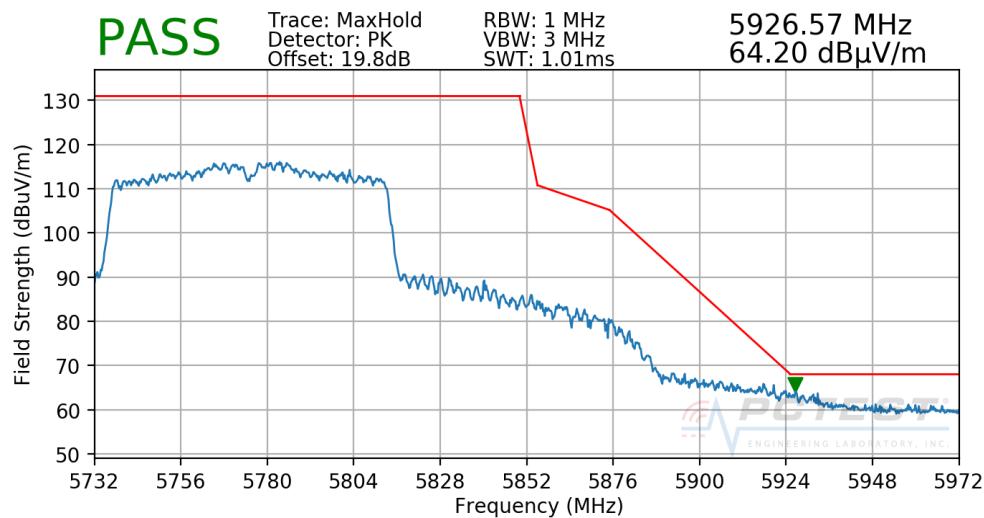

Plot 7-280. Radiated Upper Band Edge Plot CDD (Peak – UNII Band 3)

FCC ID: BCGA2230	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1912170052-12.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 198 of 207	
© 2020 PCTEST				V 9.5 12/16/2019

7.7 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-72 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-72. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = quasi-peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA2230	 PCTEST		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-12.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 199 of 207	

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

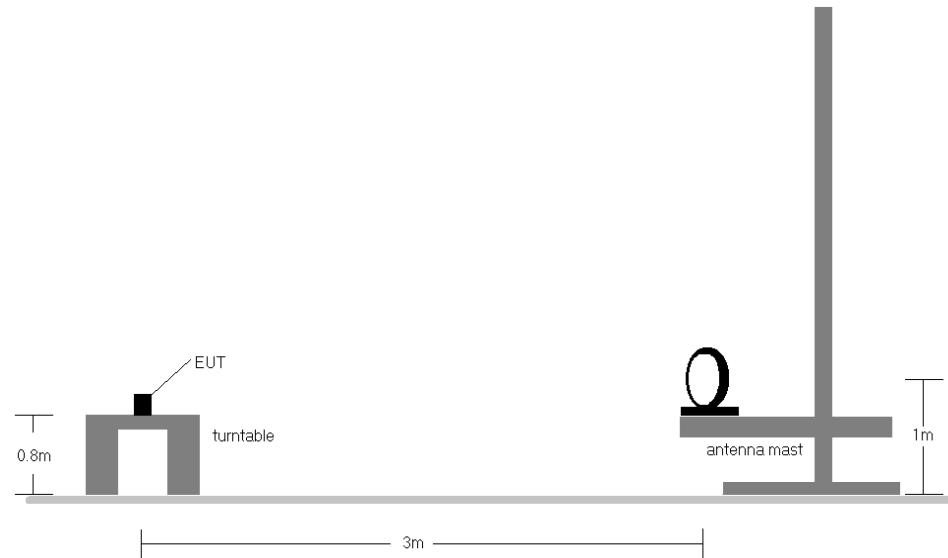


Figure 7-6. Radiated Test Setup < 30MHz

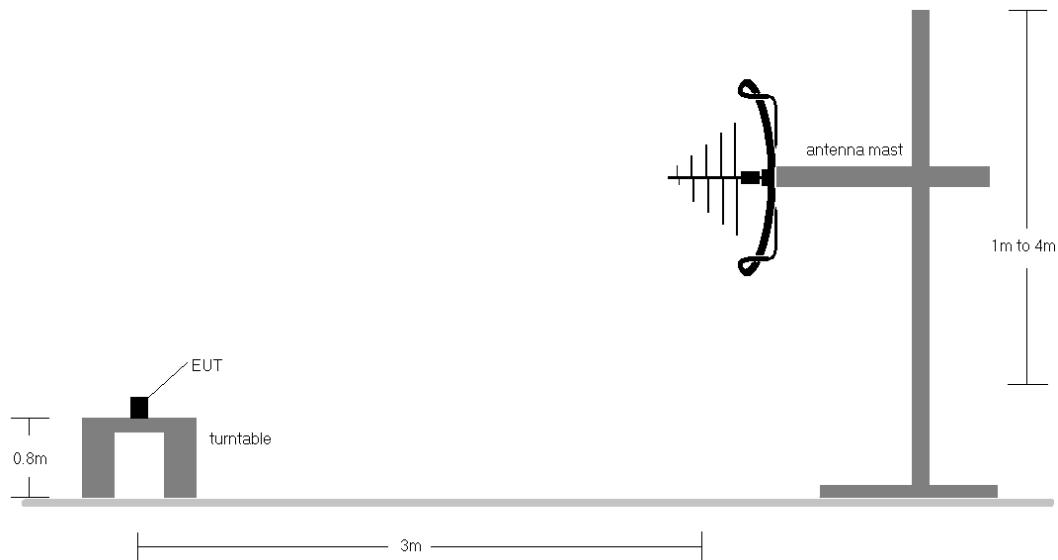


Figure 7-7. Radiated Test Setup < 1GHz

FCC ID: BCGA2230	PCTEST		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-12.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 200 of 207	
© 2020 PCTEST				V 9.5 12/16/2019


Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-72.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions within 6dB of the limit. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

FCC ID: BCGA2230	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-12.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 201 of 207

CDD Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

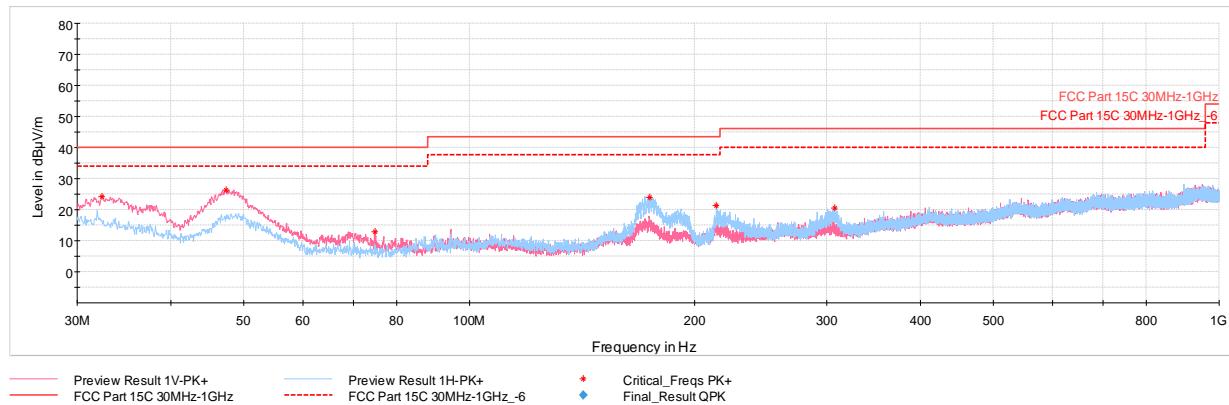

Plot 7-281. Radiated Spurious Plot below 1GHz CDD – Ch.36 with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
32.38	Max Peak	V	100	308	-69.68	-13.07	24.25	40.00	-15.75
47.36	Max Peak	V	100	275	-59.85	-20.82	26.33	40.00	-13.67
74.81	Max Peak	V	100	114	-73.31	-20.92	12.77	40.00	-27.23
174.19	Max Peak	H	100	74	-66.03	-16.98	23.99	43.52	-19.53
213.72	Max Peak	H	100	80	-69.19	-16.37	21.44	43.52	-22.08
307.08	Max Peak	H	100	282	-73.01	-13.35	20.64	46.02	-25.38

Table 7-73. Radiated Spurious Emissions below 1GHz CDD – Ch.36 with AC/DC Adapter

FCC ID: BCGA2230	 PCTEST	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1912170052-12.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device			

7.8 AC Line-Conducted Test Data

§15.407; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-74. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA2230	 PCTEST		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-12.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 203 of 207	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


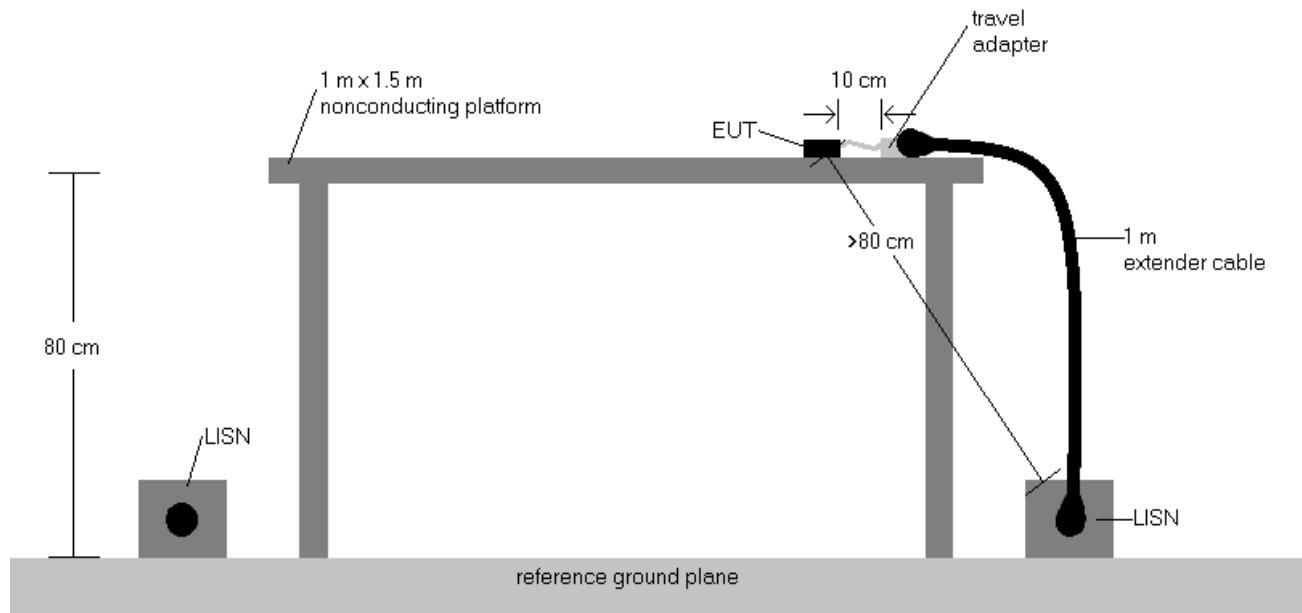


Figure 7-8. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
3. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
4. QP/AV Level (dB μ V) = QP/AV Analyzer/Receiver Level (dB μ V) + Corr. (dB)
5. Margin (dB) = QP/AV Limit (dB μ V) - QP/AV Level (dB μ V)
6. Traces shown in plot are made using quasi-peak and average detectors.
7. Deviations to the Specifications: None.

FCC ID: BCGA2230	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-12.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 204 of 207

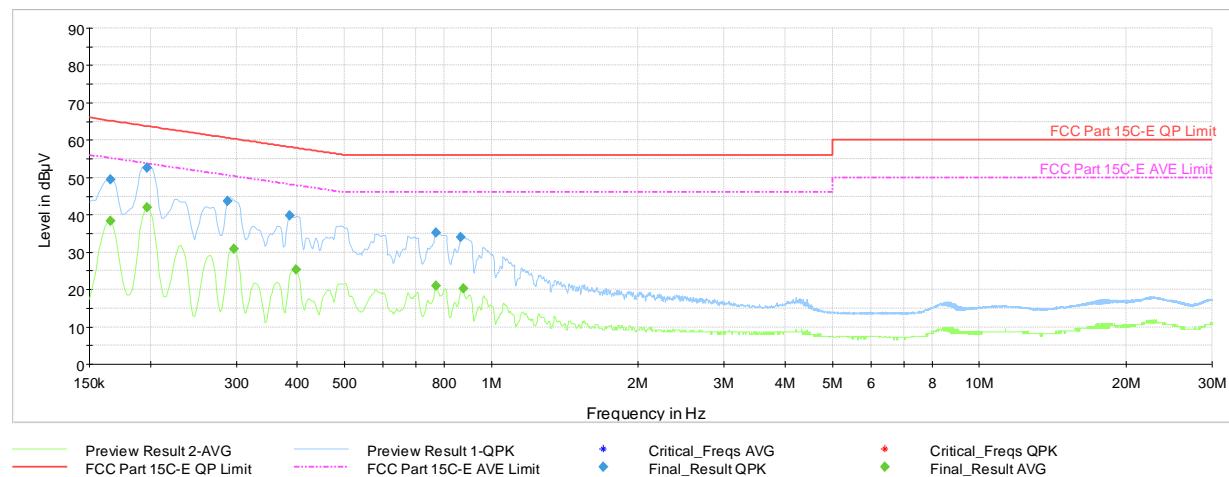


Plot 7-282. Line Conducted Plot with 802.11n UNII Band 1 – Ch.36 (L1), with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.166	FINAL	49.53	—	65.17	-15.64	L1	GND
0.166	FINAL	—	38.43	55.17	-16.74	L1	GND
0.197	FINAL	52.63	—	63.73	-11.10	L1	GND
0.197	FINAL	—	42.10	53.73	-11.63	L1	GND
0.287	FINAL	43.78	—	60.60	-16.82	L1	GND
0.296	FINAL	—	30.92	50.35	-19.43	L1	GND
0.386	FINAL	39.92	—	58.14	-18.22	L1	GND
0.398	FINAL	—	25.27	47.91	-22.64	L1	GND
0.769	FINAL	—	20.96	46.00	-25.04	L1	GND
0.769	FINAL	35.32	—	56.00	-20.68	L1	GND
0.866	FINAL	34.13	—	56.00	-21.87	L1	GND
0.875	FINAL	—	20.18	46.00	-25.82	L1	GND

Table 7-75. Line Conducted Table with 802.11n UNII Band 1 – Ch.36 (L1), with AC/DC Adapter

FCC ID: BCGA2230	 PCTEST	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1912170052-12.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device			

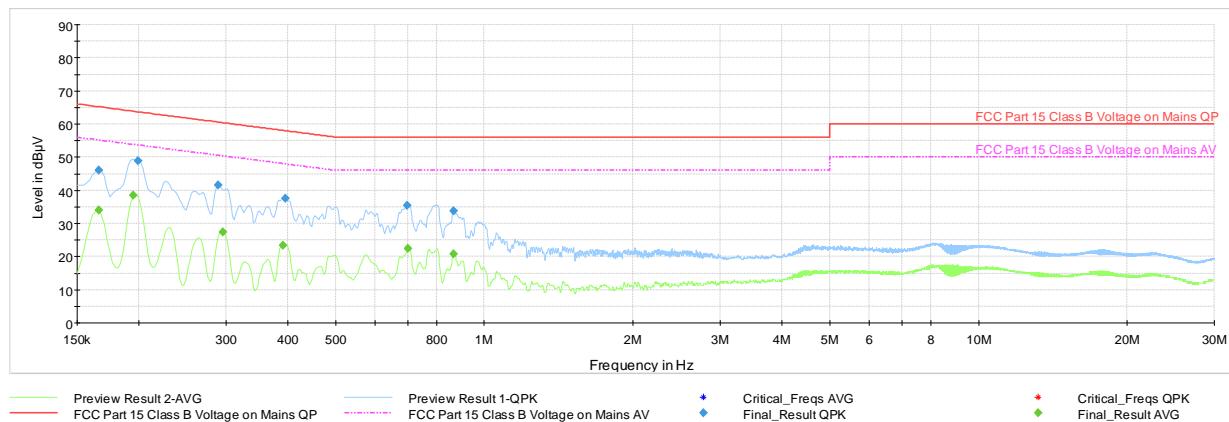

Plot 7-283. Line Conducted Plot with 802.11n UNII Band 1 – Ch.36 (N), with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.166	FINAL	46.17	—	65.17	-19.00	N	GND
0.166	FINAL	—	33.94	55.17	-21.23	N	GND
0.195	FINAL	—	38.47	53.82	-15.35	N	GND
0.200	FINAL	49.00	—	63.63	-14.63	N	GND
0.290	FINAL	41.53	—	60.54	-19.01	N	GND
0.296	FINAL	—	27.40	50.35	-22.95	N	GND
0.391	FINAL	—	23.31	48.05	-24.74	N	GND
0.395	FINAL	37.65	—	57.95	-20.30	N	GND
0.697	FINAL	35.45	—	56.00	-20.55	N	GND
0.701	FINAL	—	22.47	46.00	-23.53	N	GND
0.866	FINAL	33.74	—	56.00	-22.26	N	GND
0.868	FINAL	—	20.70	46.00	-25.30	N	GND

Table 7-76 Line Conducted Table with 802.11n UNII Band 1 – Ch.36 (N), with AC/DC Adapter

FCC ID: BCGA2230	PCTEST MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1912170052-12.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 206 of 207	

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device** **FCC ID: BCGA2230** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA2230	PCTEST® MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-12.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 207 of 207