



**PCTEST**  
18855 Adams Court, Morgan Hill, CA 95037 USA  
Tel. 410.290.6652 / Fax 410.290.6654  
<http://www.pctest.com>



## MEASUREMENT REPORT GSM/GPRS/EDGE/WCDMA

**Applicant Name:**

Apple Inc.  
One Apple Park Way  
Cupertino, CA 95014  
United States

**Date of Testing:**

12/10/2019 - 02/26/2020

**Test Site/Location:**

PCTEST Morgan Hill, CA, USA

**Test Report Serial No.:**

1C1912170052-02.BCG

<b>FCC ID:</b>	<b>BCGA2230</b>
<b>IC:</b>	<b>579C-A2230</b>
<b>APPLICANT:</b>	<b>Apple Inc.</b>

**Application Type:**

Certification

**Model/HVIN:**

A2230, A2231

**EUT Type:**

Tablet Device

**FCC Classification:**

PCS Licensed Transmitter (PCB)

**FCC Rule Part(s):**

22, 24, & 27

**ISED Specification:**

RSS-132, RSS-133, RSS-139

**Test Procedure(s):**

ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Randy Ortanez  
President




FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 1 of 112

## T A B L E   O F   C O N T E N T S

---

1.0	INTRODUCTION .....	4
	1.1    Scope .....	4
	1.2    PCTEST Test Location .....	4
	1.3    Test Facility / Accreditations .....	4
2.0	PRODUCT INFORMATION .....	5
	2.1    Equipment Description .....	5
	2.2    Device Capabilities .....	5
	2.3    Antenna Description .....	5
	2.4    Test Support Equipment .....	6
	2.5    Test Configuration .....	6
	2.6    Software and Firmware .....	6
	2.7    EMI Suppression Device(s)/Modifications .....	6
3.0	DESCRIPTION OF TESTS .....	7
	3.1    Evaluation Procedure .....	7
	3.2    Cellular - Base Frequency Blocks .....	7
	3.3    Cellular - Mobile Frequency Blocks .....	7
	3.4    PCS - Base Frequency Blocks .....	7
	3.5    PCS - Mobile Frequency Blocks .....	8
	3.6    AWS - Base Frequency Blocks .....	8
	3.7    AWS - Mobile Frequency Blocks .....	8
	3.8    Radiated Measurements .....	9
4.0	MEASUREMENT UNCERTAINTY .....	10
5.0	TEST EQUIPMENT CALIBRATION DATA .....	11
6.0	SAMPLE CALCULATIONS .....	12
7.0	TEST RESULTS .....	13
	7.1    Summary .....	13
	7.2    Occupied Bandwidth .....	14
	7.3    Spurious and Harmonic Emissions at Antenna Terminal .....	19
	7.4    Band Edge Emissions at Antenna Terminal .....	45
	7.5    Peak-Average Ratio .....	54
	7.6    Radiated Power (ERP/EIRP) .....	59
	7.6.1    Port A Radiated Power (ERP/EIRP) .....	61
	7.6.2    Port B Radiated Power (ERP/EIRP) .....	62
	7.6.3    Port C Radiated Power (ERP/EIRP) .....	63
	7.6.4    Port D Radiated Power (ERP/EIRP) .....	64
	7.7    Radiated Spurious Emissions Measurements .....	65
	7.7.1    ANT 3 (Port A) Radiated Spurious Emissions Measurements .....	68
	7.7.2    ANT 4b (Port A) Radiated Spurious Emissions Measurements .....	73
	7.7.3    ANT 1 (Port B) Radiated Spurious Emissions Measurements .....	79
	7.7.4    ANT 2b (Port B) Radiated Spurious Emissions Measurements .....	83
	7.7.5    ANT 4a (Port C) Radiated Spurious Emissions Measurements .....	89
	7.7.6    ANT 2a (Port D) Radiated Spurious Emissions Measurements .....	95
	7.8    Frequency Stability / Temperature Variation .....	101
8.0	CONCLUSION .....	112

FCC ID: BCGA2230	 <b>PCTEST</b>	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 2 of 112




## MEASUREMENT REPORT

### GSM/GPRS/EDGE/WCDMA

Mode	FCC Rule Part	Tx Frequency (MHz)	ERP		EIRP		Emission Designator
			Max. Power (W)	Max. Power (dBm)	Max. Power (W)	Max. Power (dBm)	
GPRS850	22H	824.2 - 848.8	1.074	30.31	1.762	32.46	244KGXW
EDGE850	22H	824.2 - 848.8	0.283	24.52	0.465	26.67	244KG7W
WCDMA850	22H	826.4 - 846.6	0.193	22.85	0.316	25.00	4M09F9W
WCDMA1700	27	1712.4 - 1752.6			0.224	23.50	4M10F9W
GPRS1900	24E	1850.2 - 1909.8			0.716	28.55	243KGXW
EDGE1900	24E	1850.2 - 1909.8			0.226	23.55	247KG7W
WCDMA1900	24E	1852.4 - 1907.6			0.224	23.50	4M09F9W

#### EUT Overview

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device		

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

### 1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Morgan Hill, CA 95037, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: BCGA2230	 PCTEST		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 4 of 112	

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA2230**. The test data contained in this report pertains only to the emissions due to the EUT's 2G/3G licensed transmitters.

**Test Device Serial No.:** DLXZN002P7GH, DLXZN003P7GG

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE, HDR4, HDR8)

This device supports BT Beamforming.

### 2.3 Antenna Description

Following antennas were used for the testing.

Frequency [MHz]	Antennas			
	Port A	Port B	Port C	Port D
820-960	ANT 3	ANT 1	N/A	
1700-1800				
1820-2100	ANT 4b	ANT 2b	ANT 4a	ANT 2a

Table 2-1. Antennas vs Ports

Frequency [MHz]	Antenna Gain (dBi)					
	ANT 3	ANT 1	ANT 4b	ANT 2b	ANT 4a	ANT 2a
820-960	-0.7	-0.6	N/A			
1700-1800	N/A		-2.2	-2.7	-1.5	-1.2
1820-2100			-2.2	-2.6	-1.7	-0.3

Table 2-2. Highest Antenna Gain

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 5 of 112



## 2.4 Test Support Equipment

1	Apple MacBook w/ AC/DC Adapter	Model: A1398 Model: A1435	S/N: C2QKP008F6F3 S/N: C04325505K1F288BG
2	Apple USB-C Cable	Model: Chimp	S/N: 304523
3	USB-C Cable w/ AC/DC Adapter	Model: A1997 Model: A1720	S/N: N/A S/N: C3D9274B06YLHDAE
4	Apple Pencil	Model: A2051	S/N: GQXYGSXCJKM9
5	DC Power Supply	Model: KPS3010D	S/N N/A

Table 2-3. Test Support Equipment Used

## 2.5 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz were tested with the highest transmitting power channel and the worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

## 2.6 Software and Firmware

The test was conducted with firmware version 17E228 installed on the EUT.

## 2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 6 of 112


## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

### 3.2 Cellular - Base Frequency Blocks

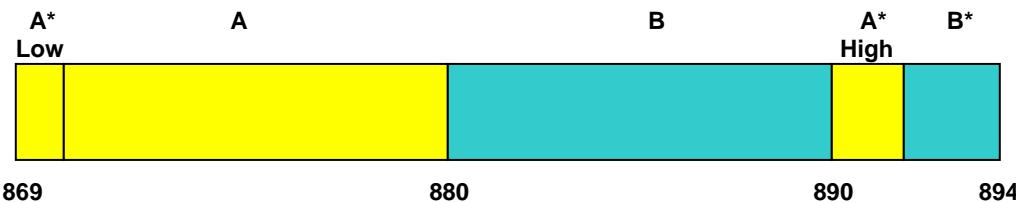


BLOCK 1: 869 – 880 MHz (A\* Low + A)

BLOCK 2: 880 – 890 MHz (B)

BLOCK 3: 890 – 891.5 MHz (A\* High)

BLOCK 4: 891.5 – 894 MHz (B\*)

### 3.3 Cellular - Mobile Frequency Blocks

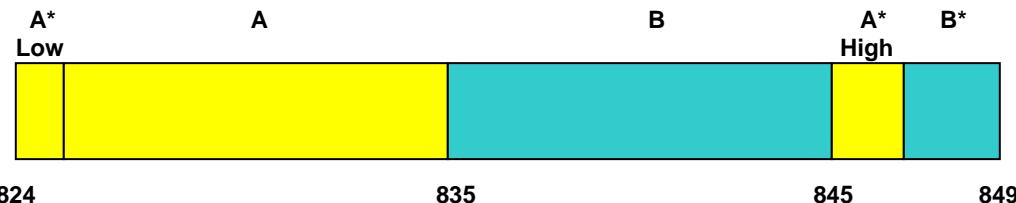


BLOCK 1: 824 – 835 MHz (A\* Low + A)

BLOCK 2: 835 – 845 MHz (B)

BLOCK 3: 845 – 846.5 MHz (A\* High)


BLOCK 4: 846.5 – 849 MHz (B\*)

### 3.4 PCS - Base Frequency Blocks

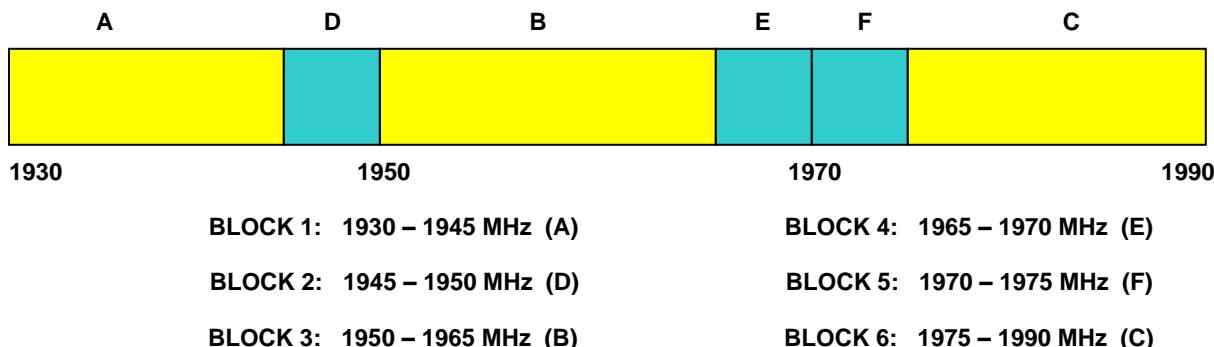


FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 7 of 112


### 3.5 PCS - Mobile Frequency Blocks

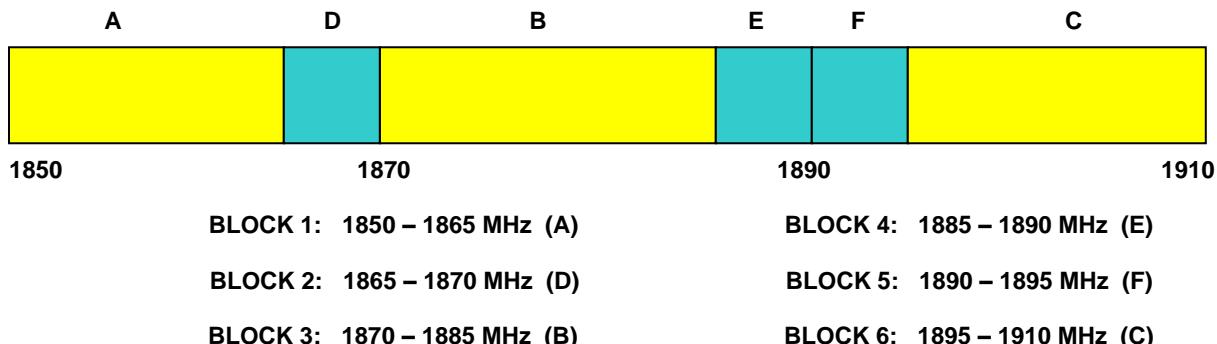

### 3.6 AWS - Base Frequency Blocks

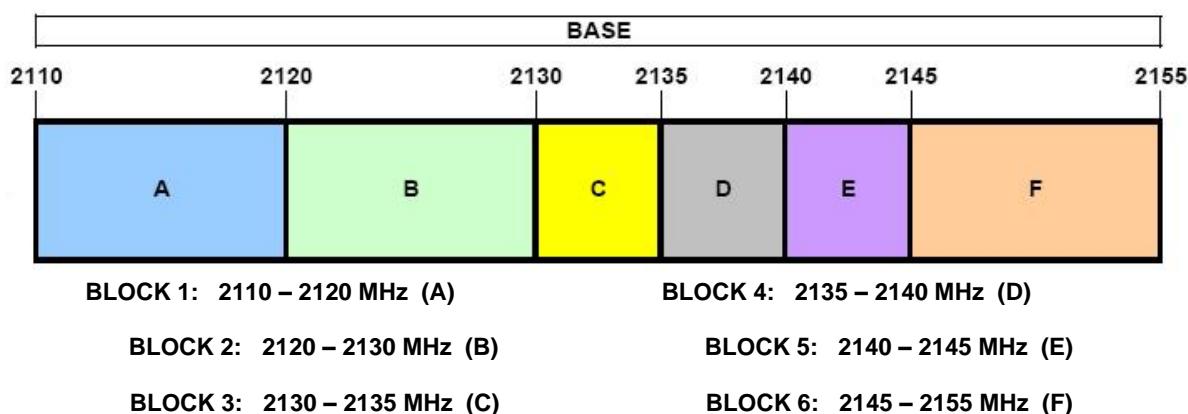

### 3.7 AWS - Mobile Frequency Blocks

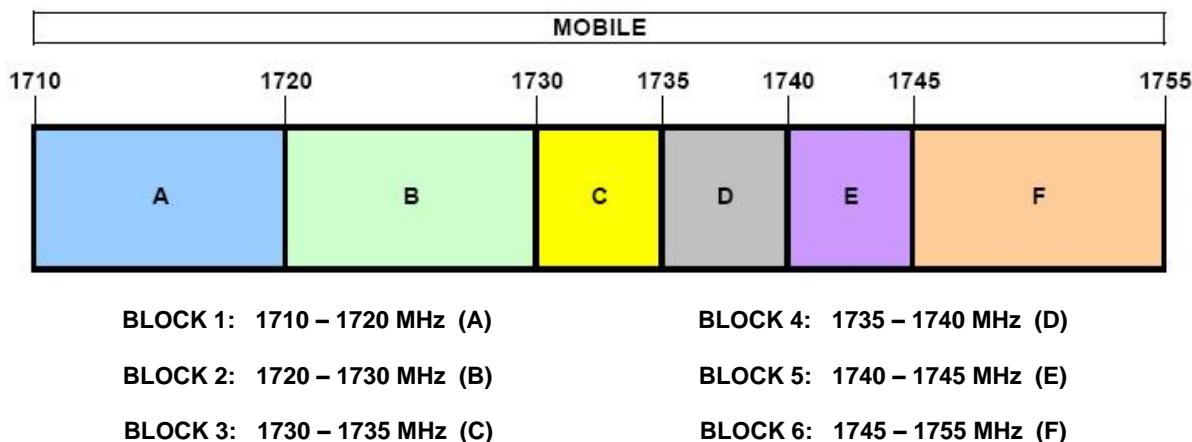

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 8 of 112	

### 3.8 Radiated Measurements

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Per the guidelines of KDB 412172 D01 v01r01, radiated power levels are measured using the following formula:

$$\text{ERP or EIRP} = P_T + G_T - L_c$$

Where  $P_T$  is the transmitter output power, expressed in dBm,  $G_T$  is the gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP), and  $L_c$  signal attenuation in the connecting cable between the transmitter and antenna in dB.

Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [\text{dBm}] = P_g [\text{dBm}] - \text{cable loss } [\text{dB}] + \text{antenna gain } [\text{dBd/dBi}]$$

Where,  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g [\text{dBm}] - \text{cable loss } [\text{dB}]$ . The calculated  $P_d$  levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of  $43 + 10\log_{10}(\text{Power } [\text{Watts}])$ .

Radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-E-2016.

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 9 of 112

## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.29
Radiated Disturbance (<1GHz)	4.15
Radiated Disturbance (>1GHz)	4.70
Radiated Disturbance (>18GHz)	5.01
Temperature	0.01

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 10 of 112

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	3/13/2019	Annual	3/13/2020	MY49430244
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	10/29/2019	Annual	10/29/2020	T058701-02
ESPEC	SU-241	Tabletop Temperature Chamber	9/3/2019	Annual	9/3/2020	92009574
ETS-Lindgren	3142E-PA	Pre-Amplifier (30MHz - 6GHz)	9/19/2019	Annual	9/19/2020	213236
ETS-Lindgren	3142E	BiConiLog Antenna (30MHz - 6GHz)	8/14/2019	Annual	8/14/2020	224569
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	3/12/2019	Annual	3/12/2020	205956
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	2/27/2019	Annual	2/27/2020	101619
Rohde & Schwarz	ESW26	EMI Test Receiver	5/21/2019	Annual	5/21/2020	101299
Rohde & Schwarz	ESW44	EMI Test Receiver	7/27/2019	Annual	7/27/2020	101668
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	4/20/2019	Annual	4/20/2020	161617
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	8/8/2019	Annual	8/8/2020	151888
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	9/19/2019	Annual	9/19/2020	100051
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Antenna (400MHz-18GHz)	11/14/2019	Annual	11/14/2020	101057
Rohde & Schwarz	HFH2-Z2	Loop Antenna	3/21/2019	Annual	3/21/2020	100519

**Table 5-1. Test Equipment**

**Notes:**

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCGA2230	 <b>PCTEST</b>	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 11 of 112

## 6.0 SAMPLE CALCULATIONS

### GPRS Emission Designator

**Emission Designator = 250KGXW**

GPRS BW = 250 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

### EDGE Emission Designator

**Emission Designator = 250KG7W**

EDGE BW = 250 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

### WCDMA Emission Designator

**Emission Designator = 4M16F9W**

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

### Spurious Radiated Emission

**Example: Spurious emission at 3700.40 MHz**

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was  $-81.0$  dBm. The gain of the substituted antenna is  $8.1$  dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0$  dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is  $2.0$  dB at  $3700.40$  MHz. So  $6.1$  dB is added to the signal generator reading of  $-30.9$  dBm yielding  $-24.80$  dBm. The fundamental EIRP was  $25.50$  dBm so this harmonic was  $25.50$  dBm  $- (-24.80) = 50.3$  dBc.

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 12 of 112

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: Apple Inc.  
 FCC ID: BCGA2230  
 FCC Classification: PCS Licensed Transmitter (PCB)  
 Mode(s): GSM/GPRS/EDGE/WCDMA

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	RSS-Gen (4.6.1) RSS-133(2.3) RSS-139(2.3)	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
2.1051 22.917(a) 24.238(a) 27.53(h)	RSS-132(5.5) RSS-133(6.5) RSS-139(6.6)	Conducted Band Edge / Spurious Emissions	> $43 + \log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions		PASS	Sections 7.3, 7.4
24.232(d)	RSS-132(5.4) RSS-133(6.4) RSS-139(6.5)	Peak-Average Ratio	< 13 dB		PASS	Section 7.5
2.1046	RSS-132(5.4) RSS-133(4.1) RSS-139(4.1)	Transmitter Conducted Output Power	N/A		PASS	Section 7.6
2.1055 22.355 24.235 27.54	RSS-132(5.3) RSS-133(6.3) RSS-139(6.4)	Frequency Stability	< 2.5 ppm (Part 22) Emission must remain in band (Part 24, 27)		PASS	Section 7.8
22.913(a)(5)	RSS-132(5.4)	Effective Radiated Power	< 7 Watts max. ERP		PASS	Section 7.6
24.232(c)	RSS-133(6.4)	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS	Section 7.6
27.50(d)(4)	RSS-139(6.5)	Equivalent Isotropic Radiated Power	< 1 Watts max. EIRP		PASS	Section 7.6
2.1053 22.917(a) 24.238(a) 27.53(h)	RSS-132(5.5) RSS-133(6.5) RSS-139(6.6)	Radiated Spurious Emissions	> $43 + \log_{10}(P[\text{Watts}])$ for all out-of-band emissions	RADIATED	PASS	Section 7.7

**Table 7-1. Summary of Test Results**

**Notes:**

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "2G/3G Automation," Version 4.2.
- 5) All ports were investigated and only the worst case data were reported.

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 13 of 112

## 7.2 Occupied Bandwidth

### Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

### Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

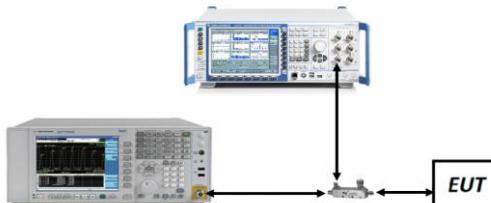


Figure 7-1. Test Instrument & Measurement Setup

### Test Notes

1. All ports were tested and only the worst case data were reported.
2. Refer to Table 2-1 Section 2.3 of this test report for correlation between Antennas and Ports.

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 14 of 112


Mode	Occupied Bandwidth [kHz]
GPRS850	243.60
EDGE850	244.17
WCDMA850	4087.61
WCDMA1700	4097.08
GPRS1900	242.79
EDGE1900	247.07
WCDMA1900	4090.33

Table 7-2. Occupied Bandwidth Results



Plot 7-1. Occupied Bandwidth Plot (Cellular GPRS Mode)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 15 of 112

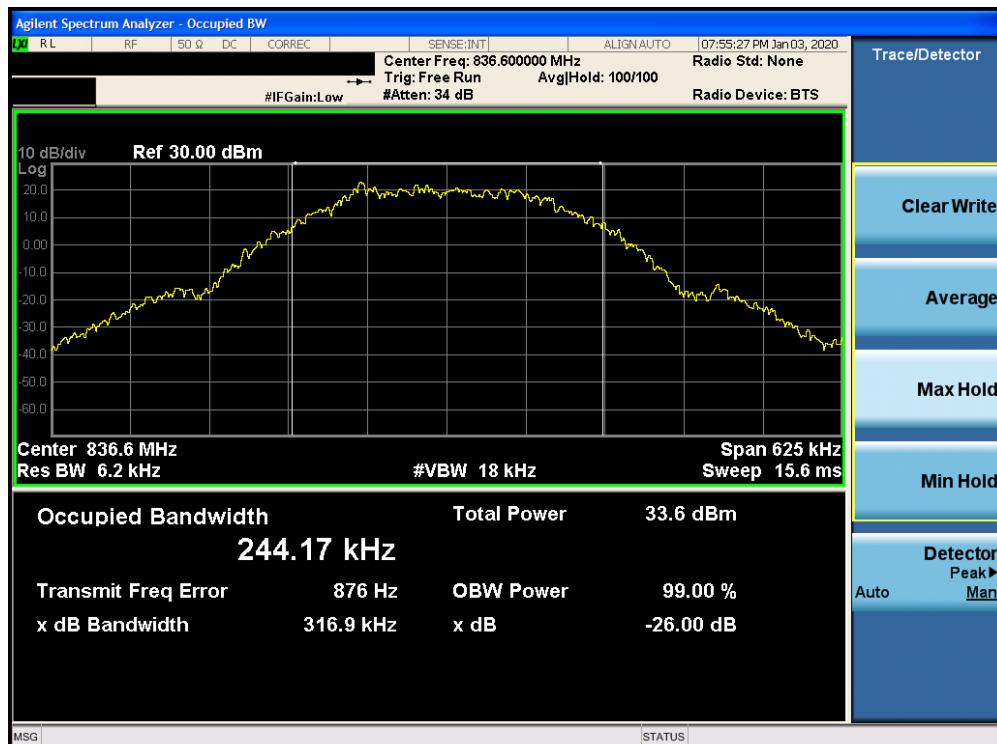

Plot 7-2. Occupied Bandwidth Plot (EDGE850 Mode)



Plot 7-3. Occupied Bandwidth Plot (PCS GPRS Mode)

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 16 of 112	



Plot 7-4. Occupied Bandwidth Plot (EDGE1900 Mode)



Plot 7-5. Occupied Bandwidth Plot (Cellular WCDMA Mode)

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 17 of 112	



Plot 7-6. Occupied Bandwidth Plot (AWS WCDMA Mode)



Plot 7-7. Occupied Bandwidth Plot (PCS WCDMA Mode)

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 18 of 112	

## 7.3 Spurious and Harmonic Emissions at Antenna Terminal

### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

***The minimum permissible attenuation level of any spurious emission is  $43 + \log_{10}(P_{\text{Watts}})$ , where P is the transmitter power in Watts.***

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 6.0

### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz for Cell, 20GHz for AWS, 20GHz for PCS (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

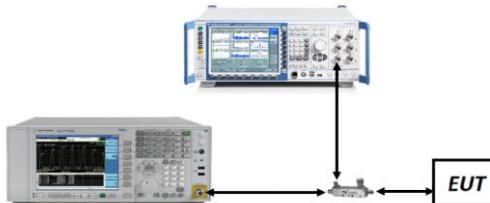


**Figure 7-2. Test Instrument & Measurement Setup**

### Test Notes


1. Per 24.238(b), 27.53(h)(3), and RSS-133(6.5), RSS-139(6.5), compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 1MHz, and 100 kHz or greater for Part 22 and RSS-132 measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
2. All ports were tested and only the worst case data were reported.
3. Refer to Table 2-1 Section 2.3 of this test report for correlation between Antennas and Ports.

FCC ID: BCGA2230	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 19 of 112

## Cellular GPRS Mode

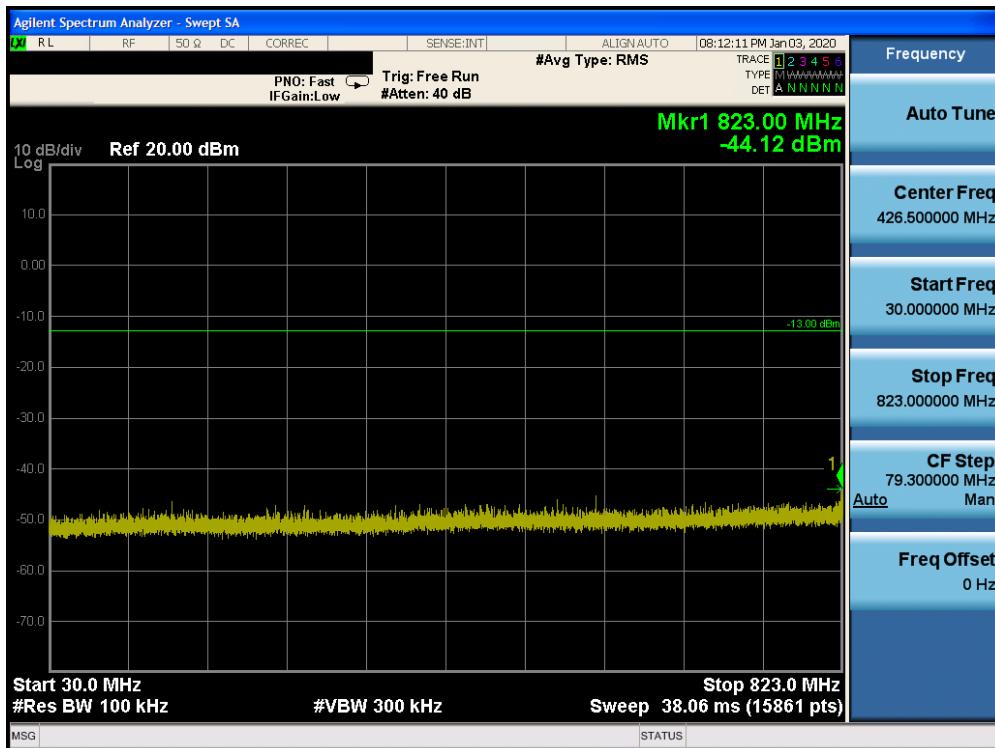


Plot 7-8. Conducted Spurious Plot (Cellular GPRS Mode - Low Channel)

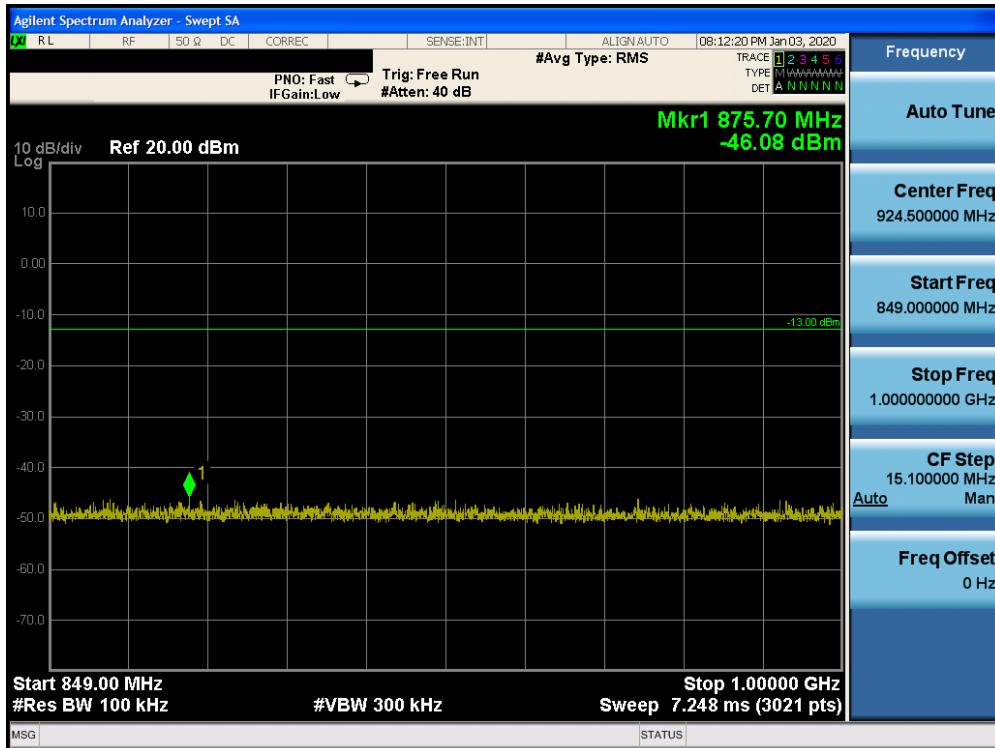


Plot 7-9. Conducted Spurious Plot (Cellular GPRS Mode - Low Channel)

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 20 of 112	

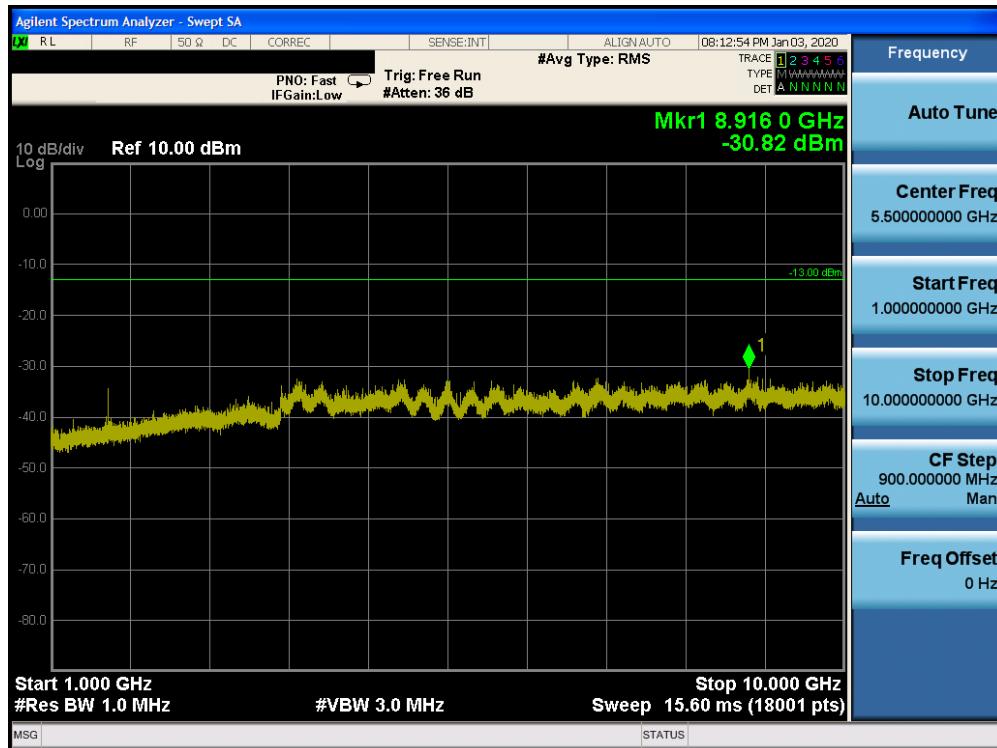


Plot 7-10. Conducted Spurious Plot (Cellular GPRS Mode - Low Channel)

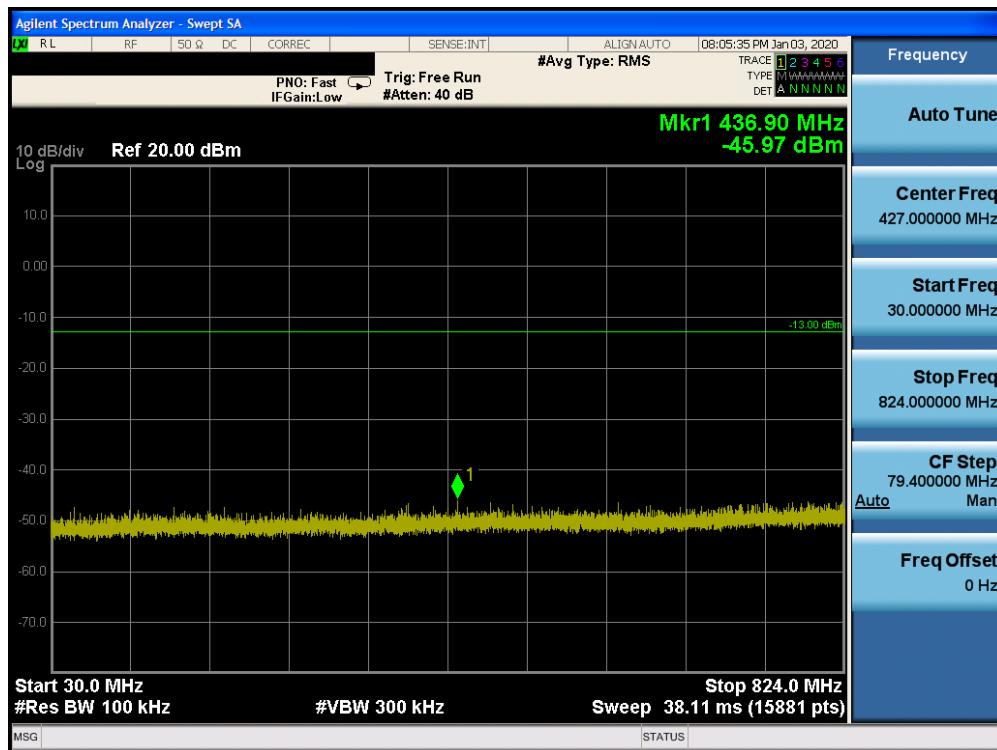


Plot 7-11. Conducted Spurious Plot (Cellular GPRS Mode - Mid Channel)

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 21 of 112

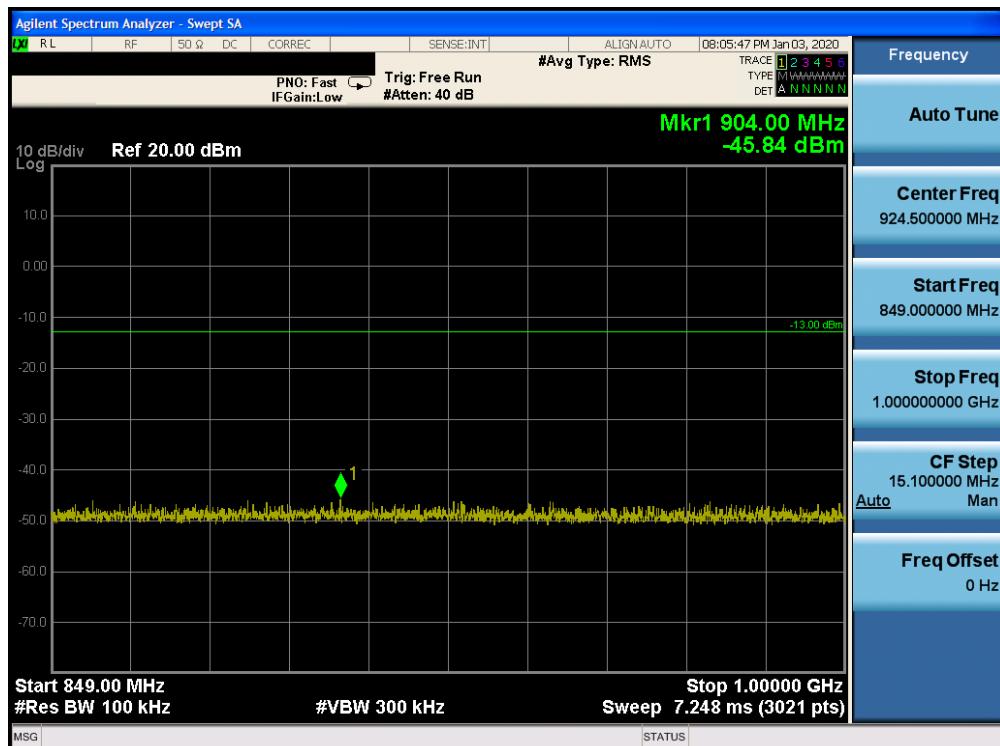


Plot 7-12. Conducted Spurious Plot (Cellular GPRS Mode - Mid Channel)

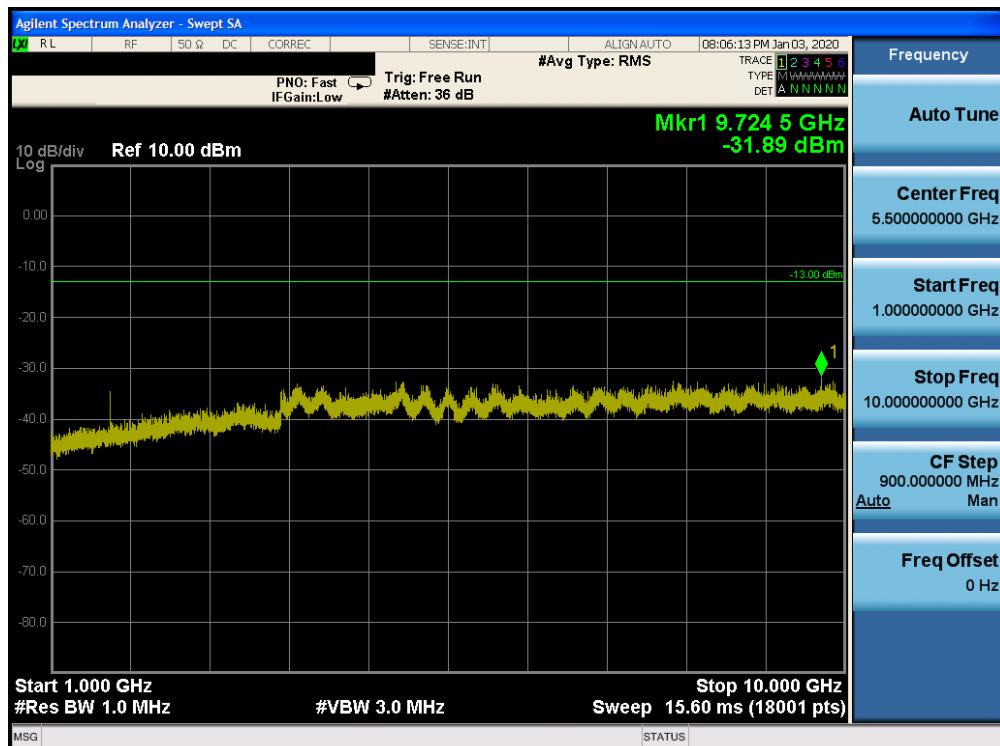


Plot 7-13. Conducted Spurious Plot (Cellular GPRS Mode - Mid Channel)

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 22 of 112	

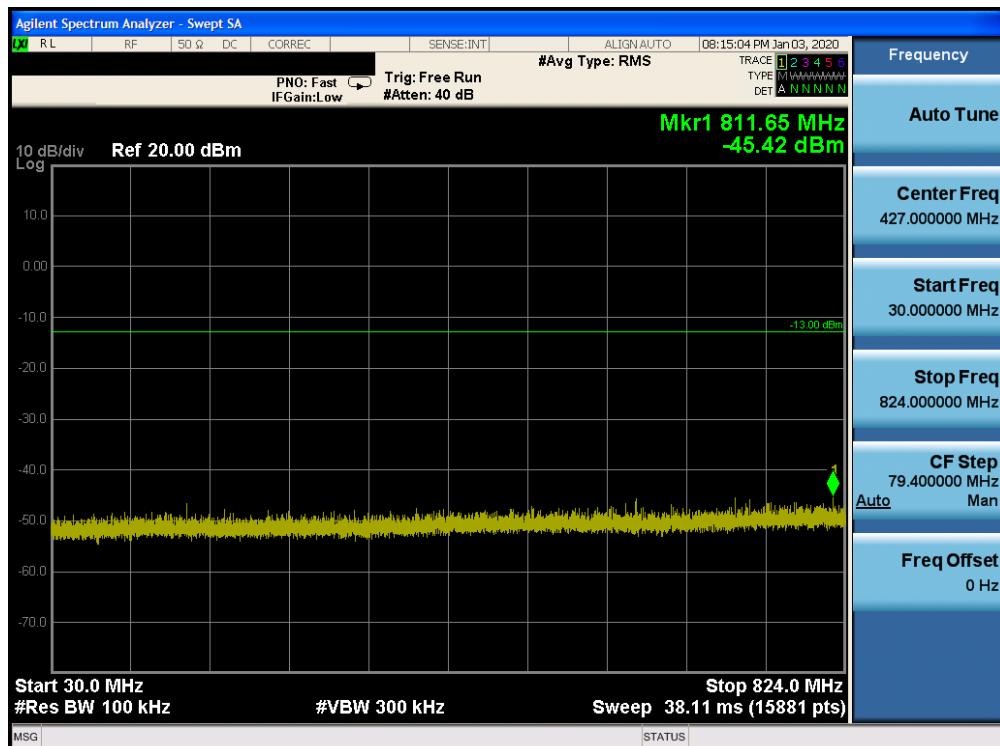


Plot 7-14. Conducted Spurious Plot (Cellular GPRS Mode - High Channel)

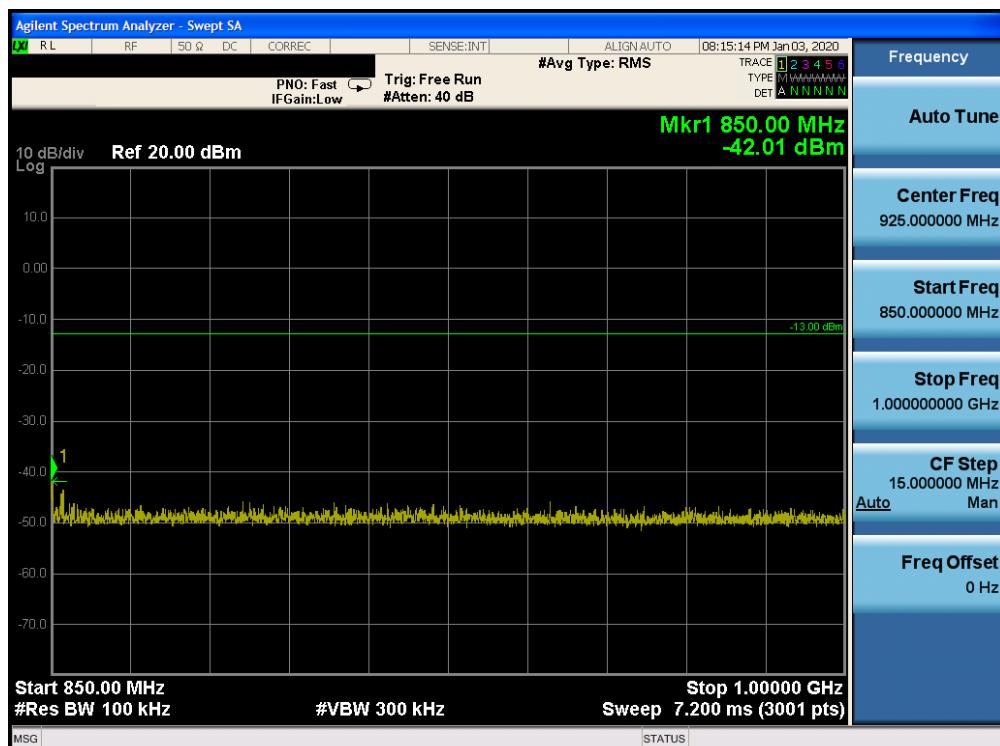

Plot 7-15. Conducted Spurious Plot (Cellular GPRS Mode - High Channel)


FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 23 of 112	

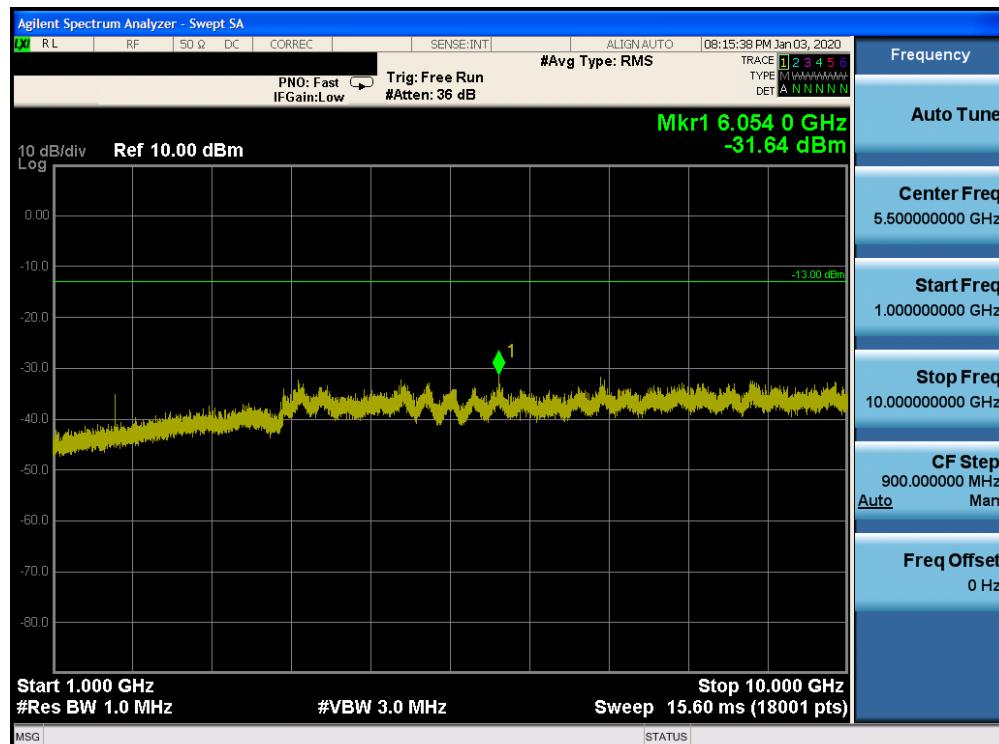


Plot 7-16. Conducted Spurious Plot (Cellular GPRS Mode - High Channel)

FCC ID: BCGA2230	 <b>PCTEST</b>	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 24 of 112

## PCS GPRS Mode

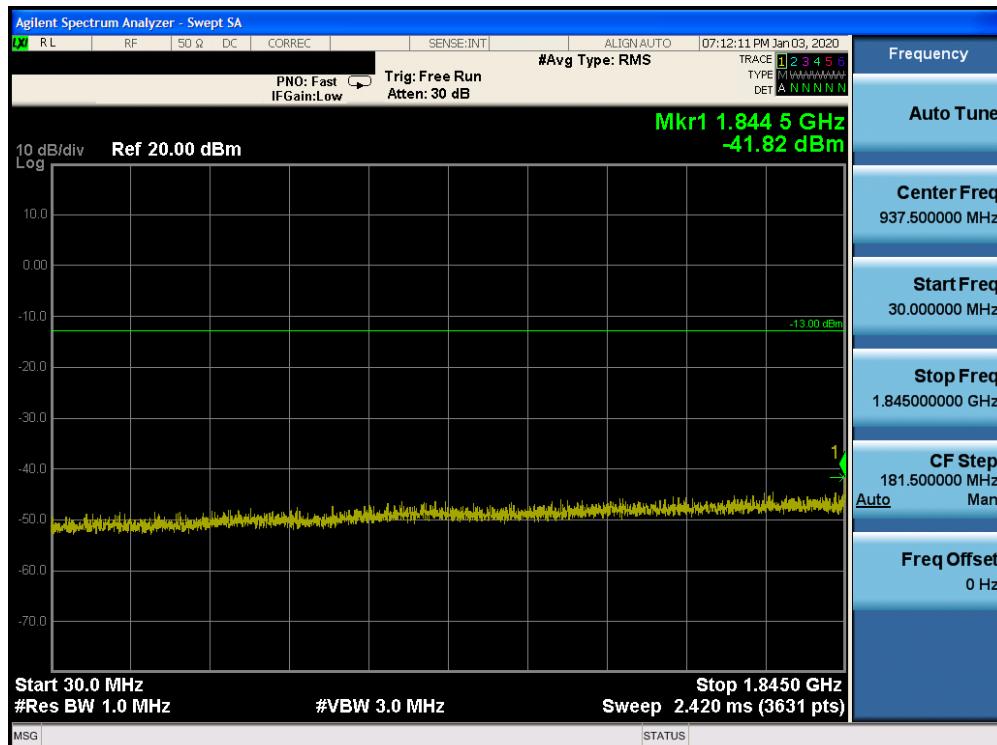


Plot 7-17. Conducted Spurious Plot (PCS GPRS Mode - Low Channel)

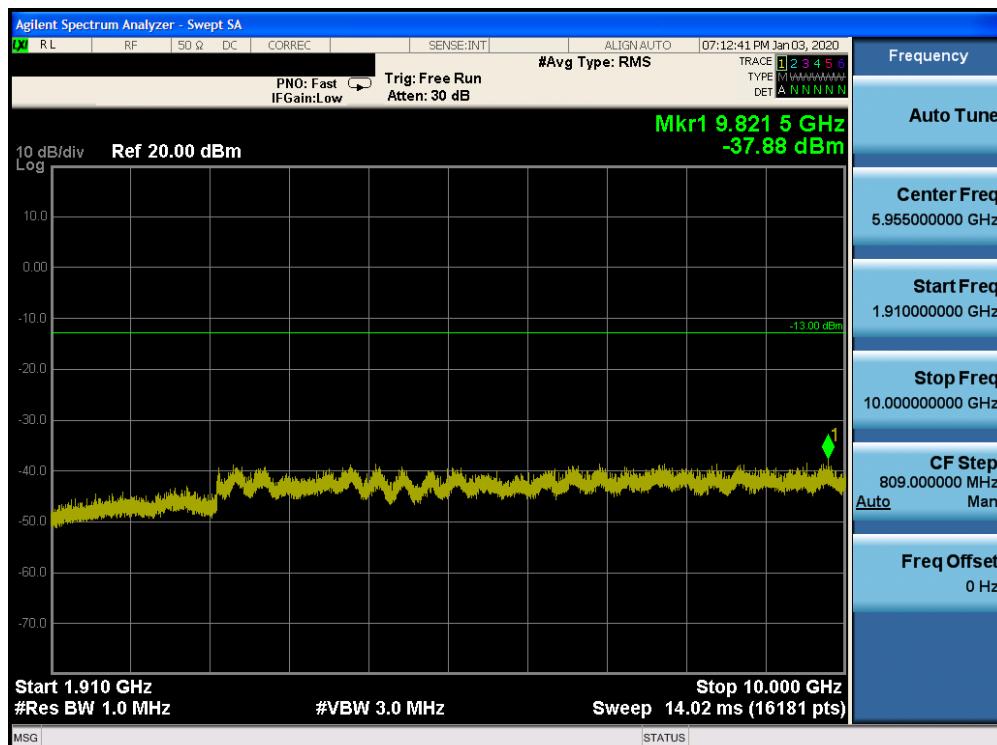


Plot 7-18. Conducted Spurious Plot (PCS GPRS Mode - Low Channel)

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 25 of 112	

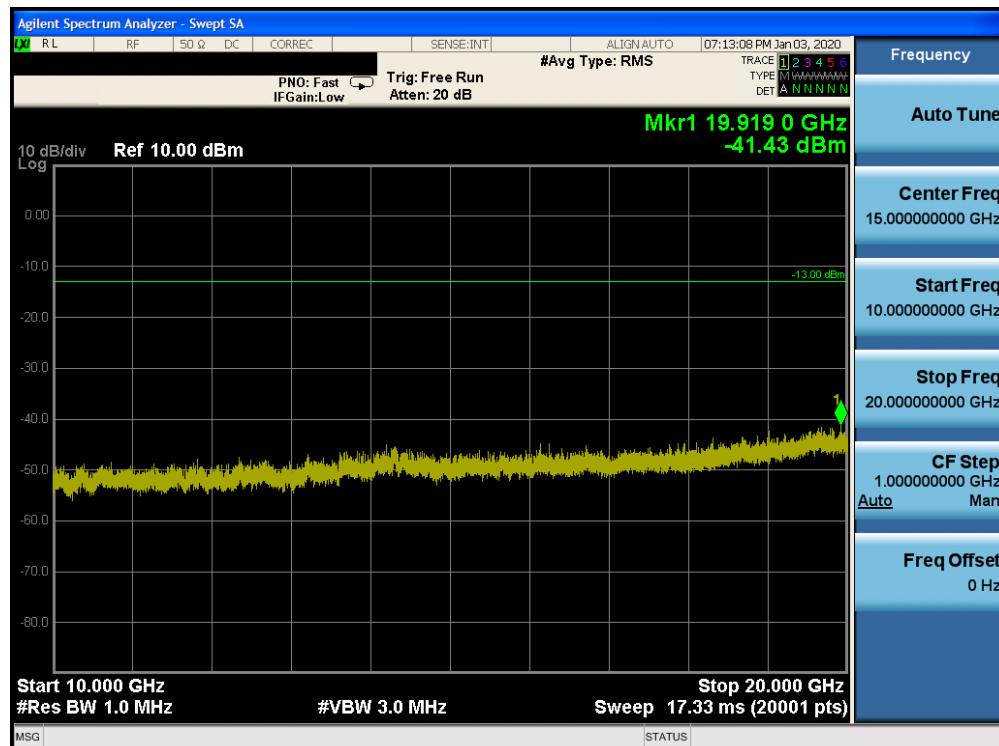


Plot 7-19. Conducted Spurious Plot (PCS GPRS Mode - Low Channel)

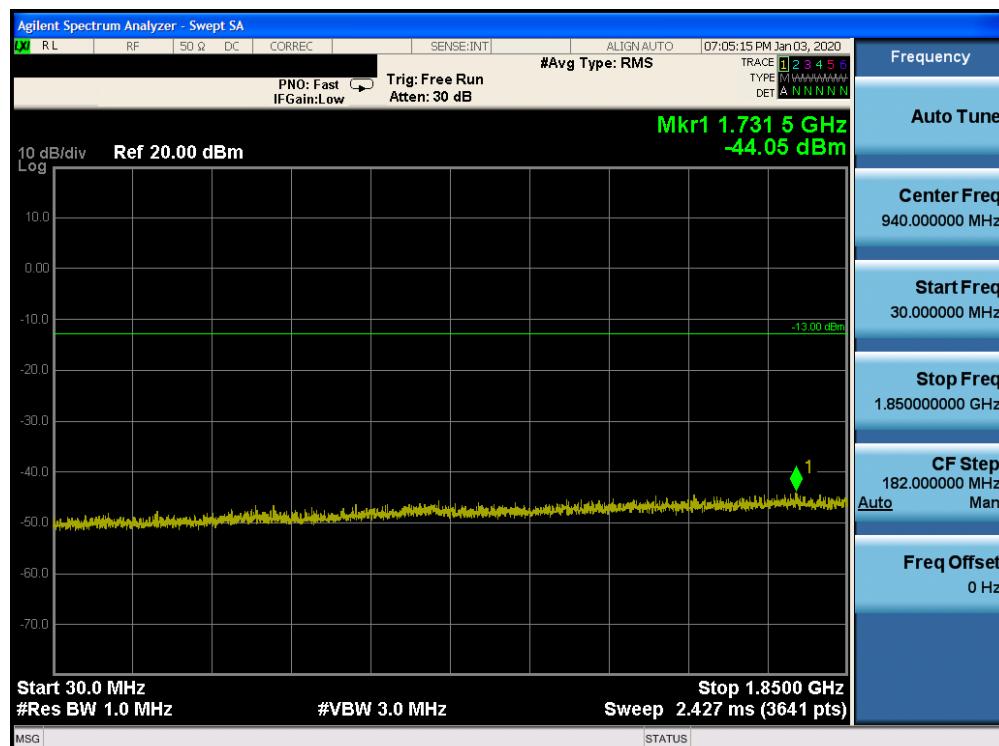


Plot 7-20. Conducted Spurious Plot (PCS GPRS Mode - Mid Channel)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 26 of 112

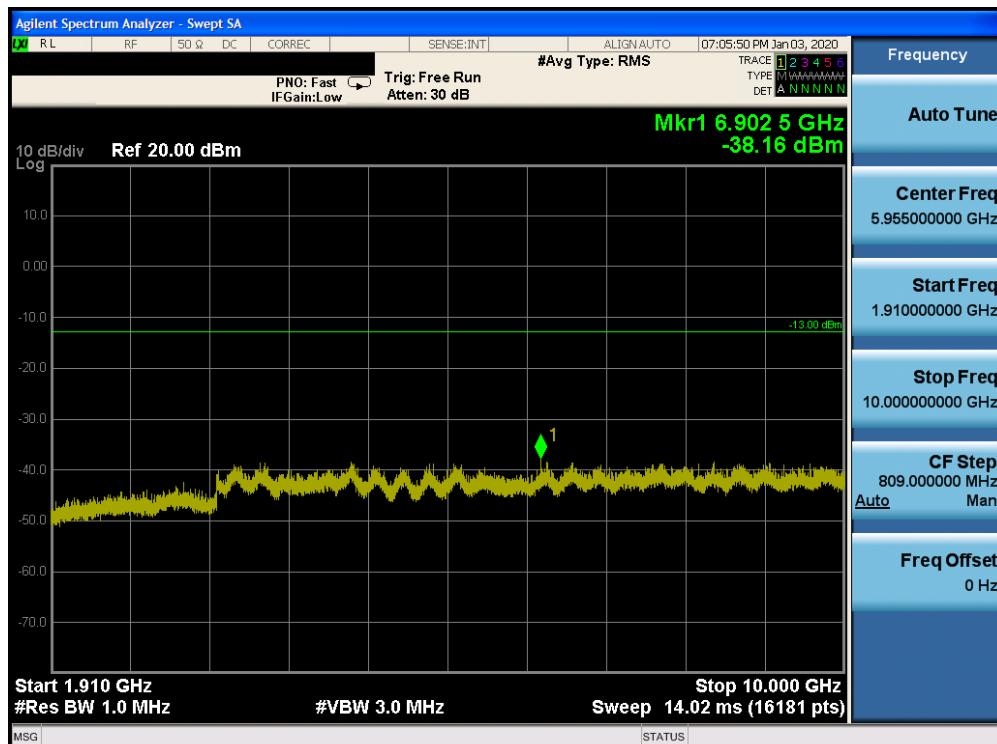


Plot 7-21. Conducted Spurious Plot (PCS GPRS Mode - Mid Channel)

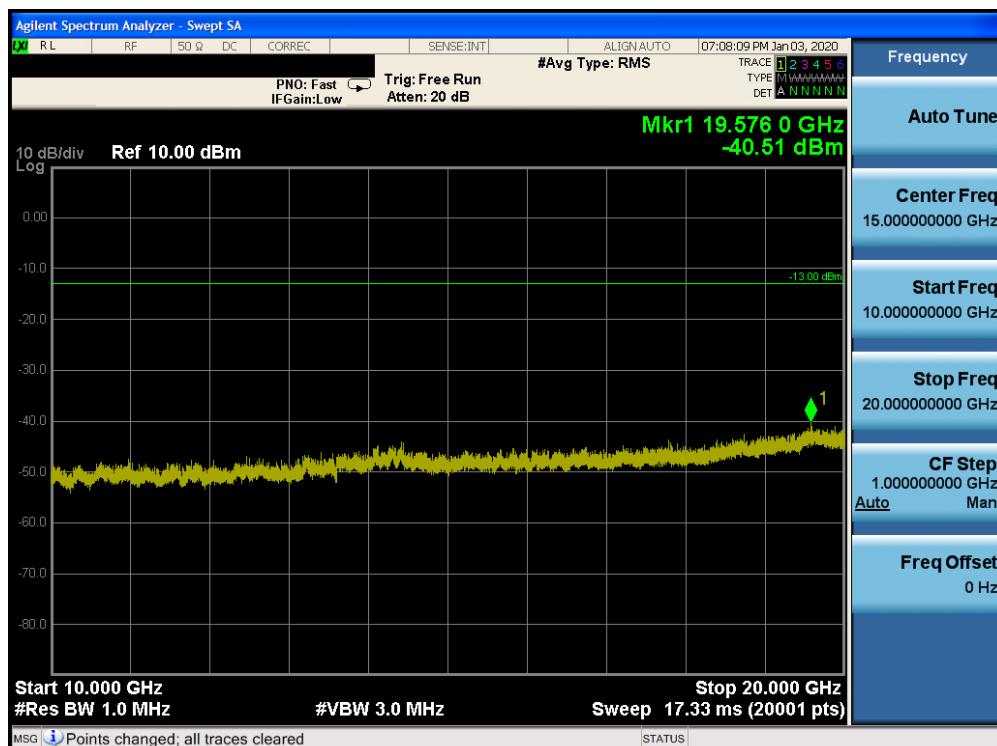


Plot 7-22. Conducted Spurious Plot (PCS GPRS Mode - Mid Channel)

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 27 of 112	

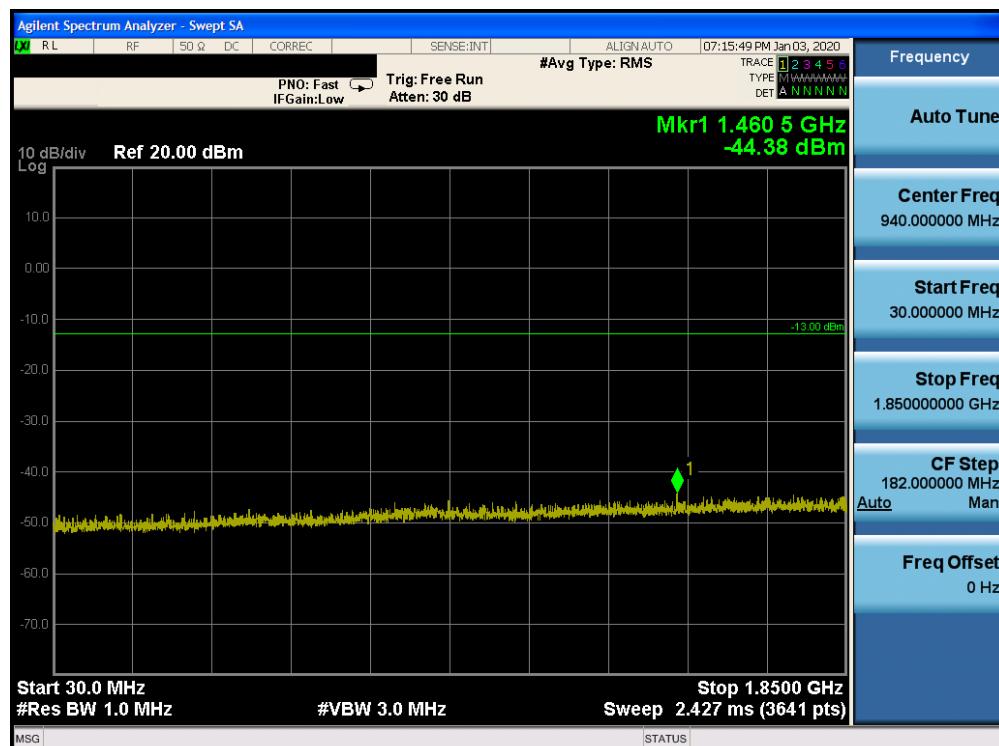


Plot 7-23. Conducted Spurious Plot (PCS GPRS Mode - High Channel)

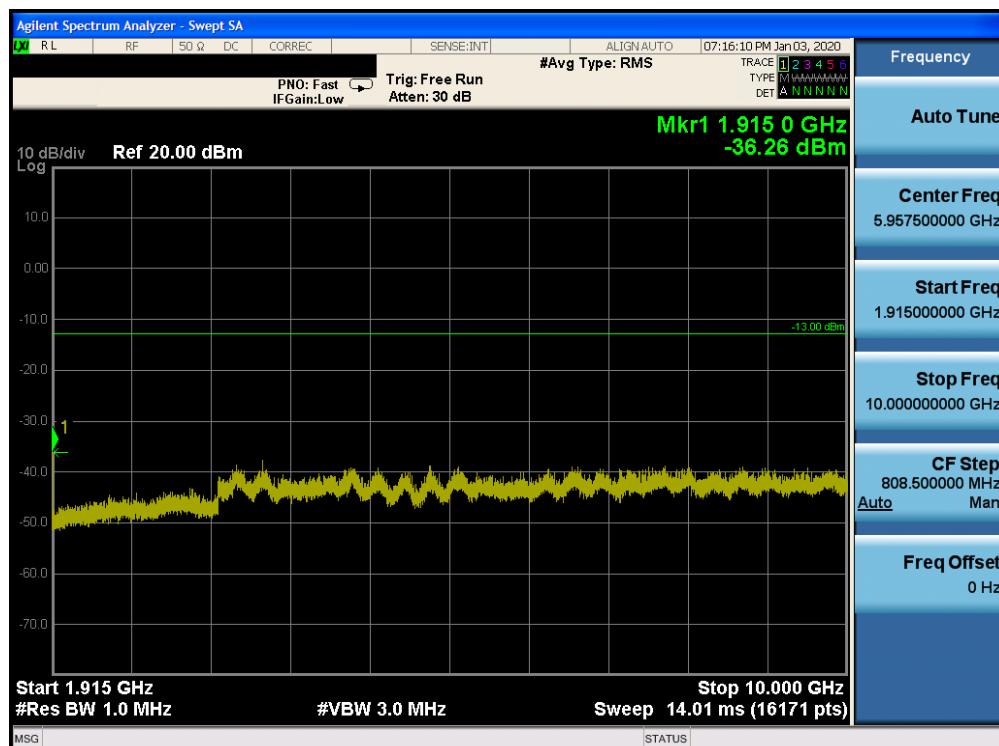

Plot 7-24. Conducted Spurious Plot (PCS GPRS Mode - High Channel)


FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 28 of 112	

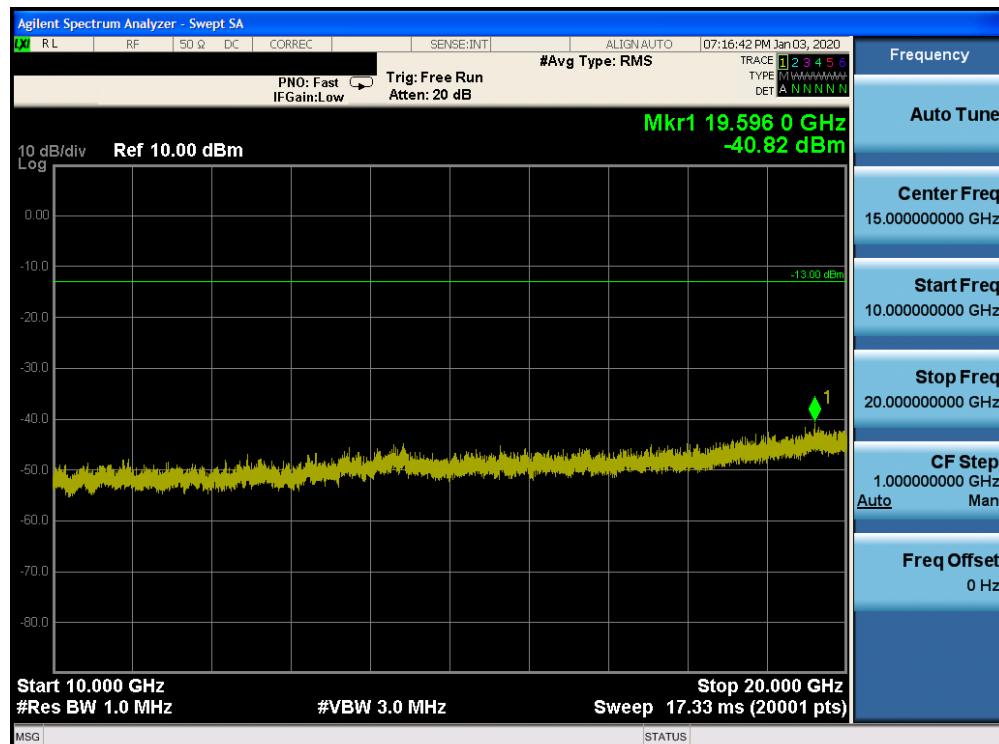


Plot 7-25. Conducted Spurious Plot (PCS GPRS Mode - High Channel)

FCC ID: BCGA2230	 <b>PCTEST</b>	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 29 of 112

## Cellular WCDMA Mode

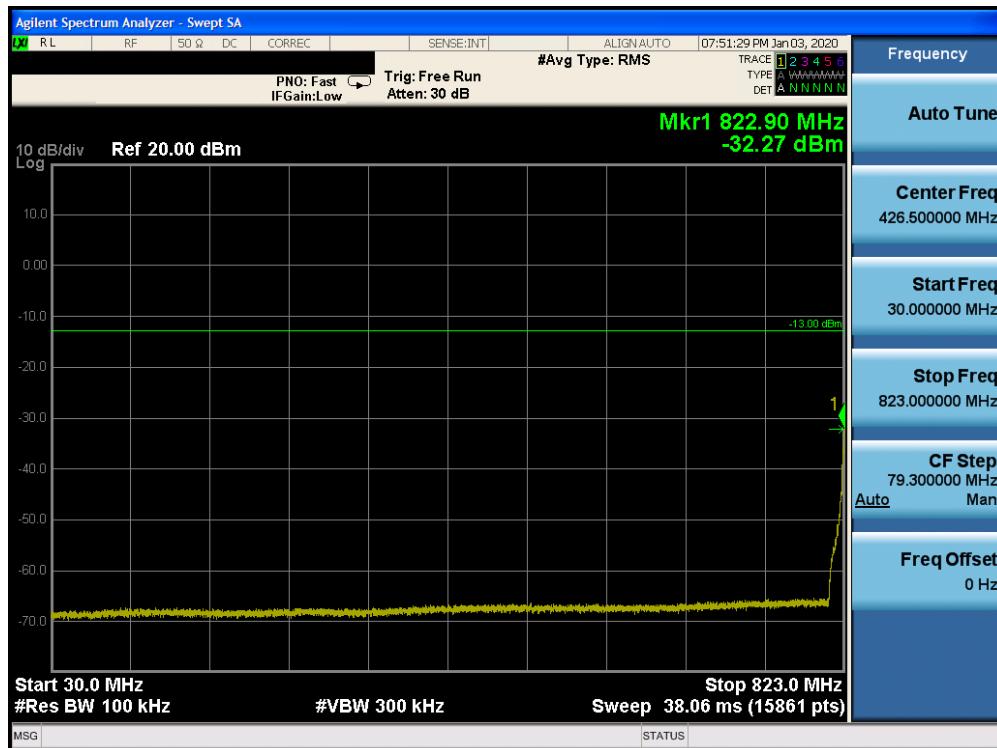


Plot 7-26. Conducted Spurious Plot (Cellular WCDMA Mode - Low Channel)

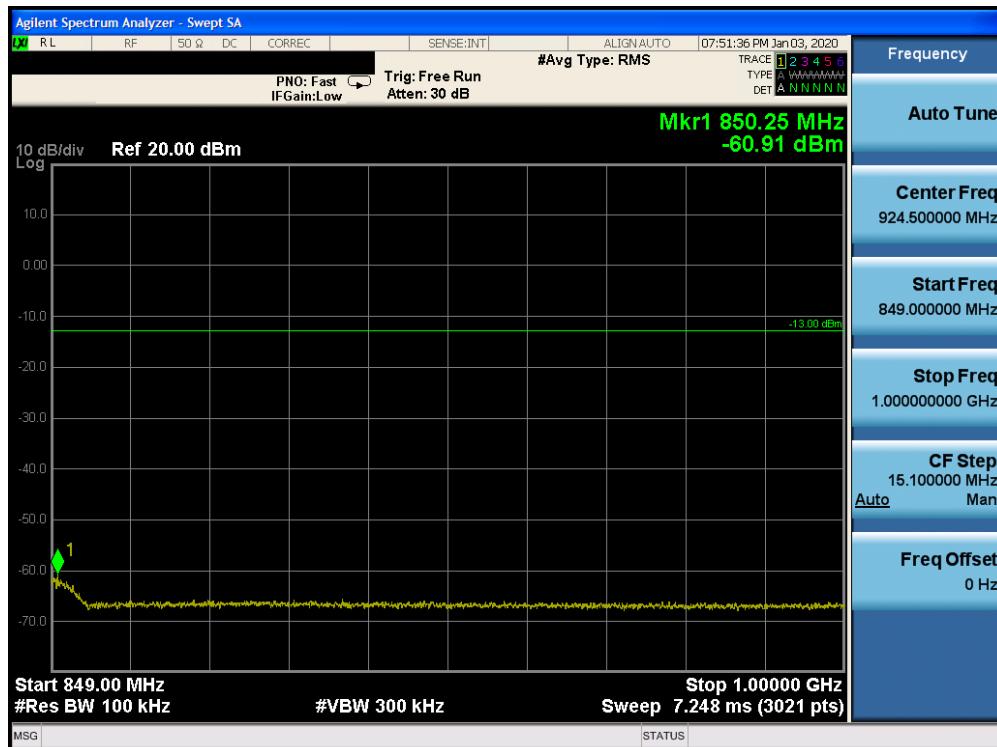


Plot 7-27. Conducted Spurious Plot (Cellular WCDMA Mode - Low Channel)

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 30 of 112

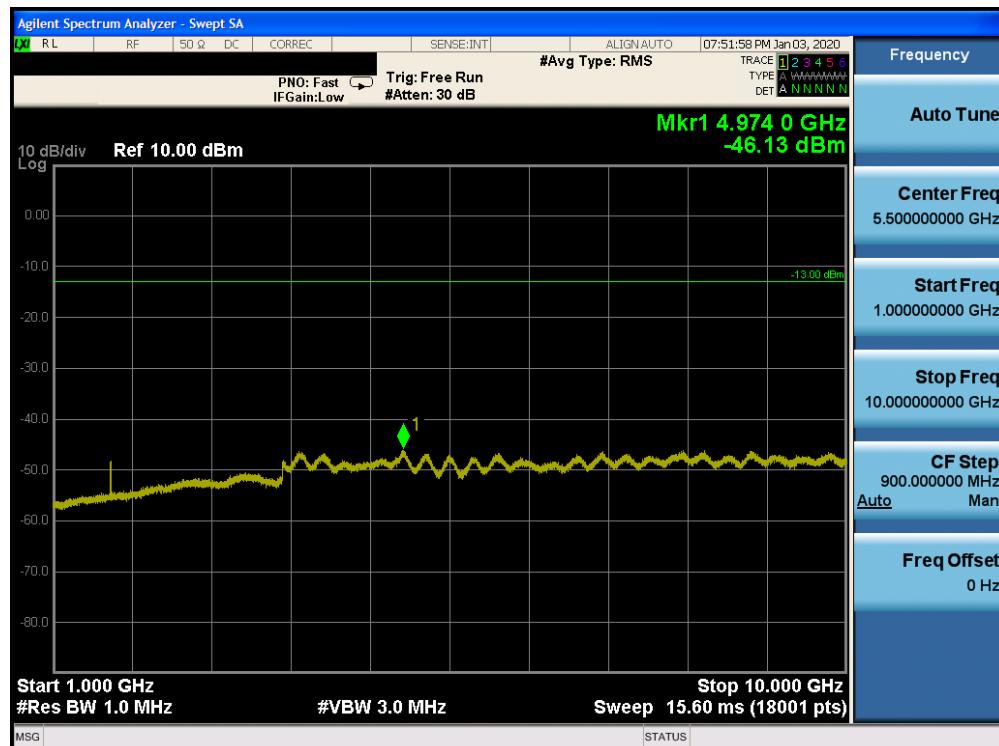


Plot 7-28. Conducted Spurious Plot (Cellular WCDMA Mode - Low Channel)

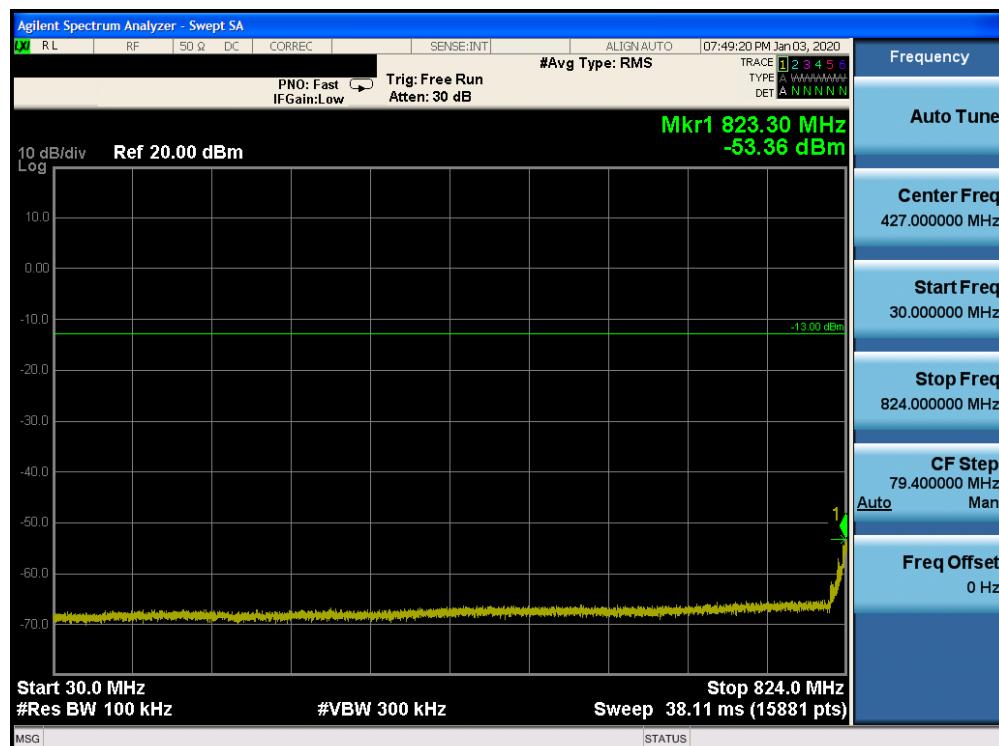


Plot 7-29. Conducted Spurious Plot (Cellular WCDMA Mode - Mid Channel)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 31 of 112

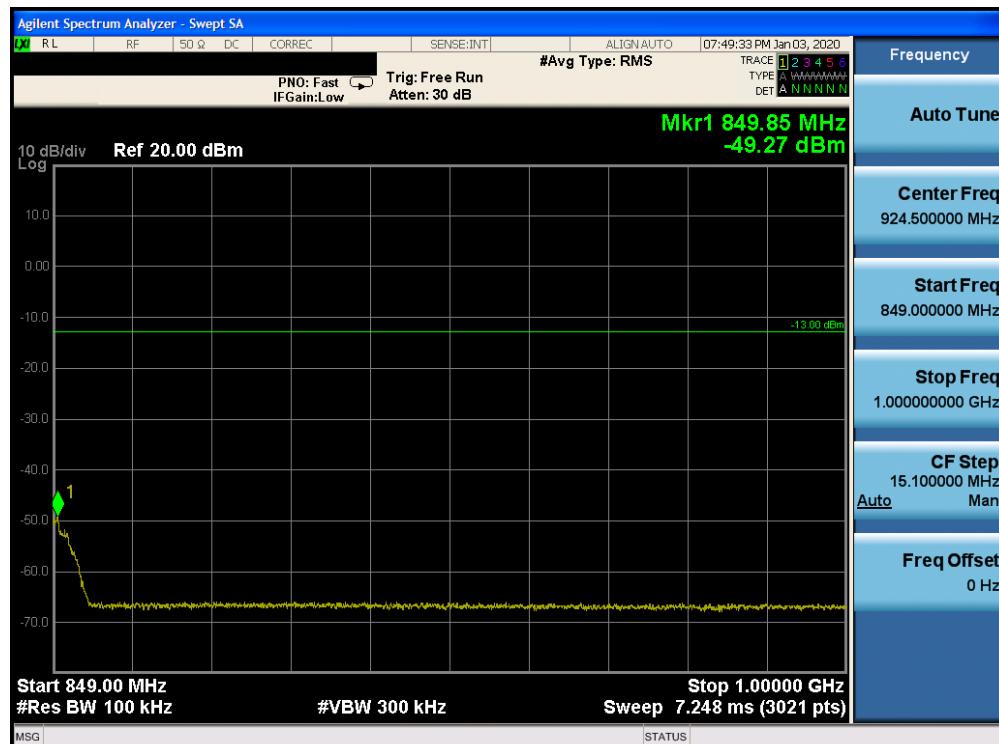


Plot 7-30. Conducted Spurious Plot (Cellular WCDMA Mode - Mid Channel)

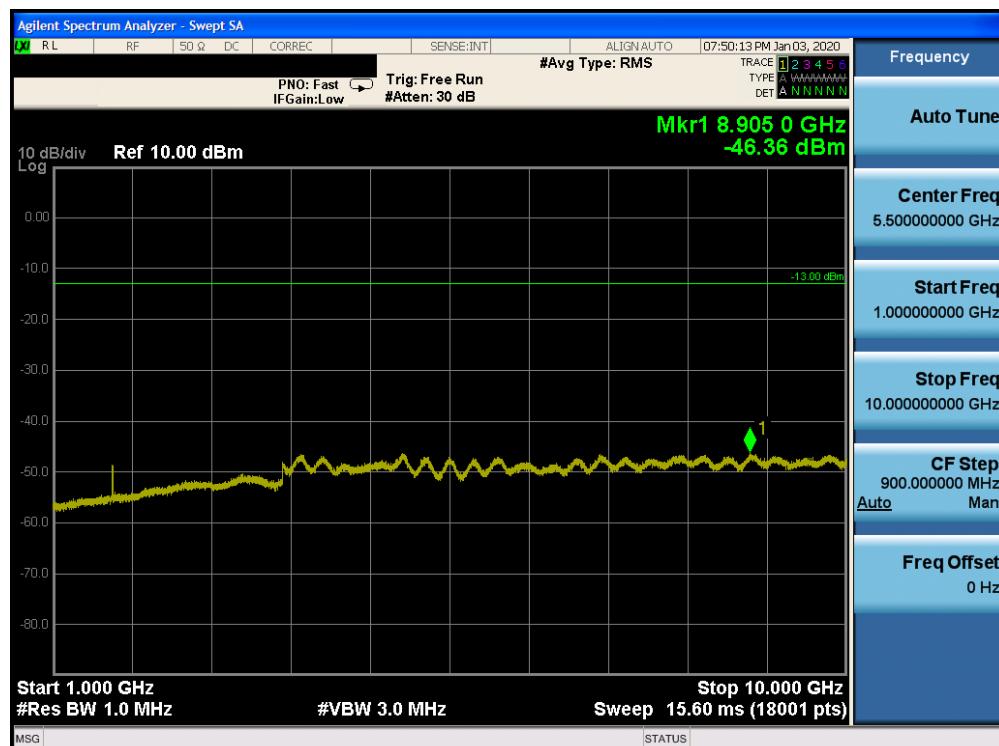


Plot 7-31. Conducted Spurious Plot (Cellular WCDMA Mode - Mid Channel)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 32 of 112

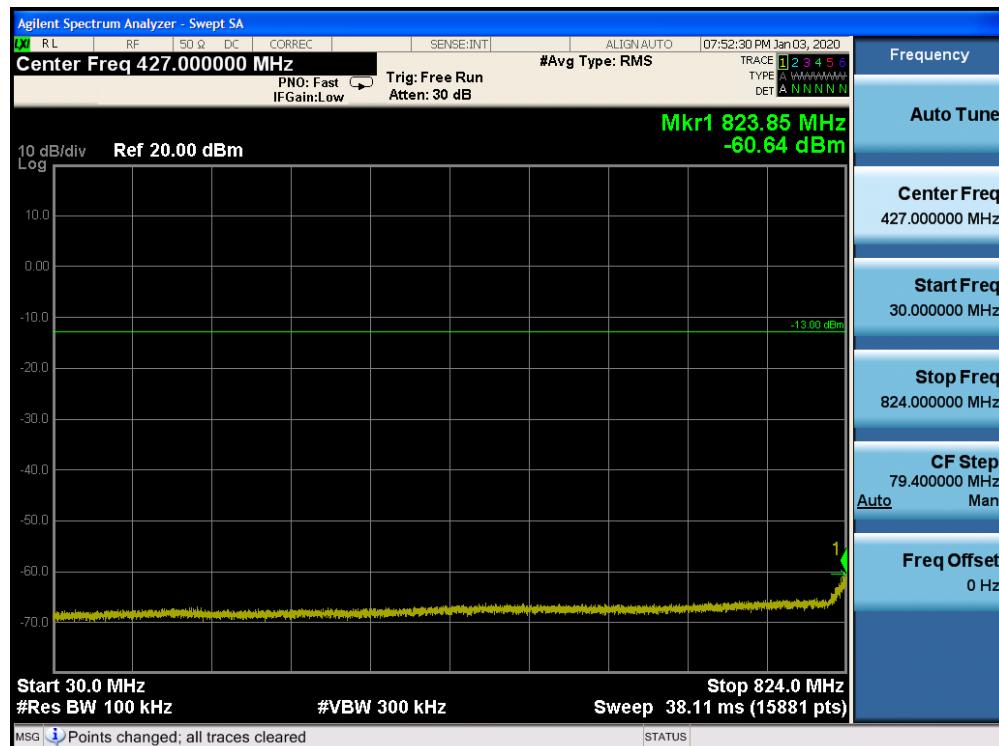


Plot 7-32. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)

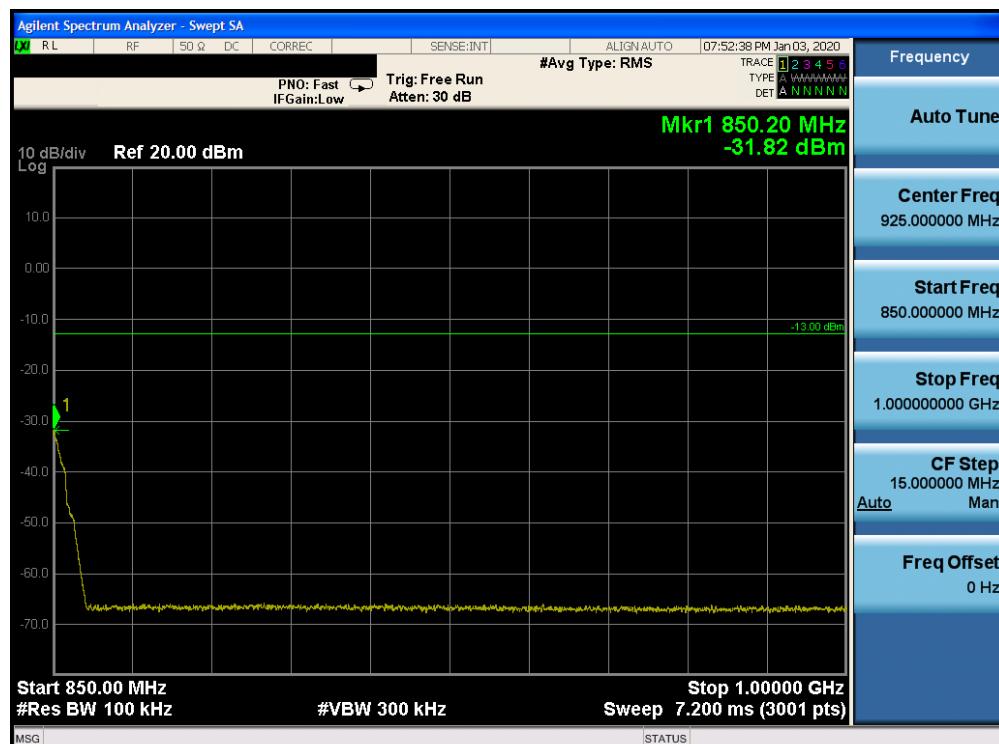

Plot 7-33. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)


FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 33 of 112	

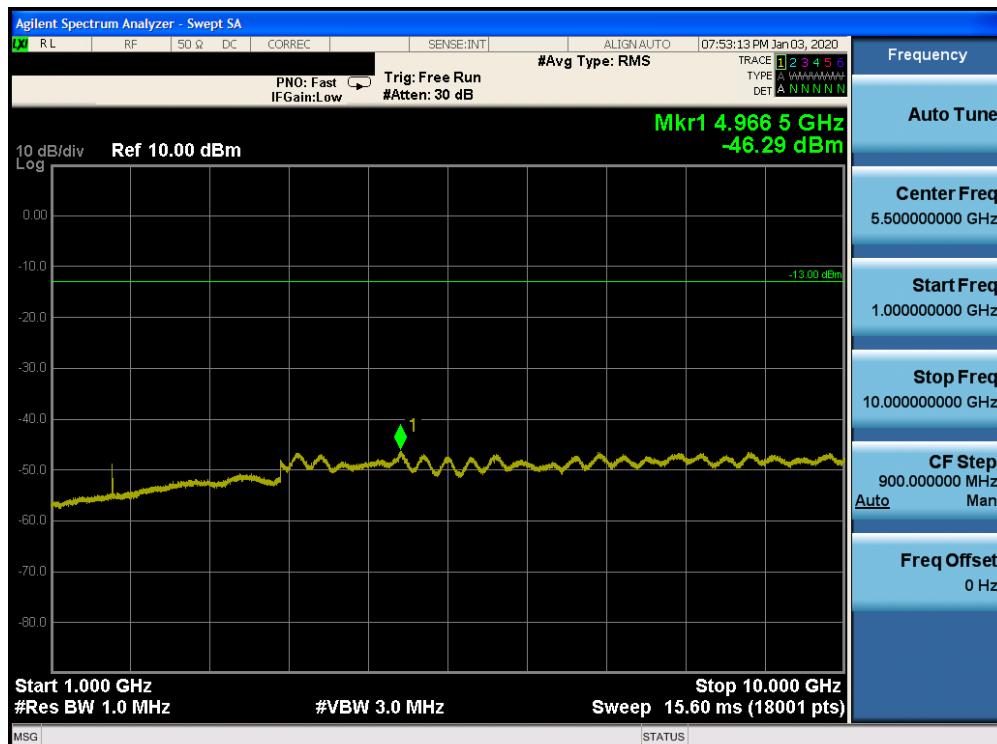


Plot 7-34. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 34 of 112

## AWS WCDMA Mode

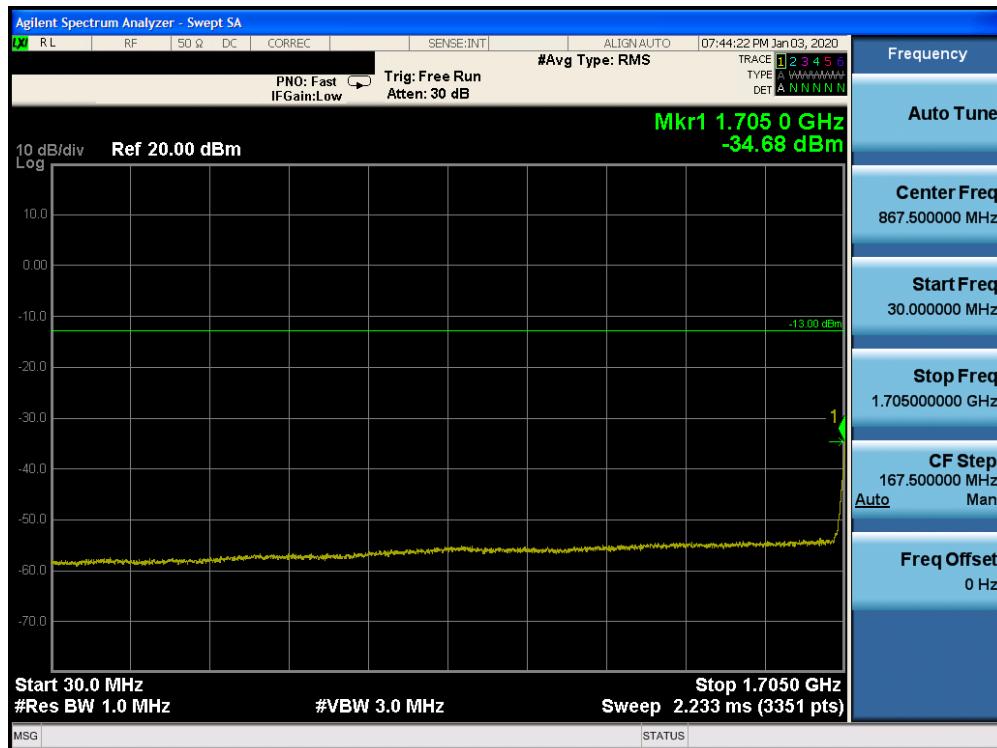


Plot 7-35. Conducted Spurious Plot (AWS WCDMA Mode - Low Channel)

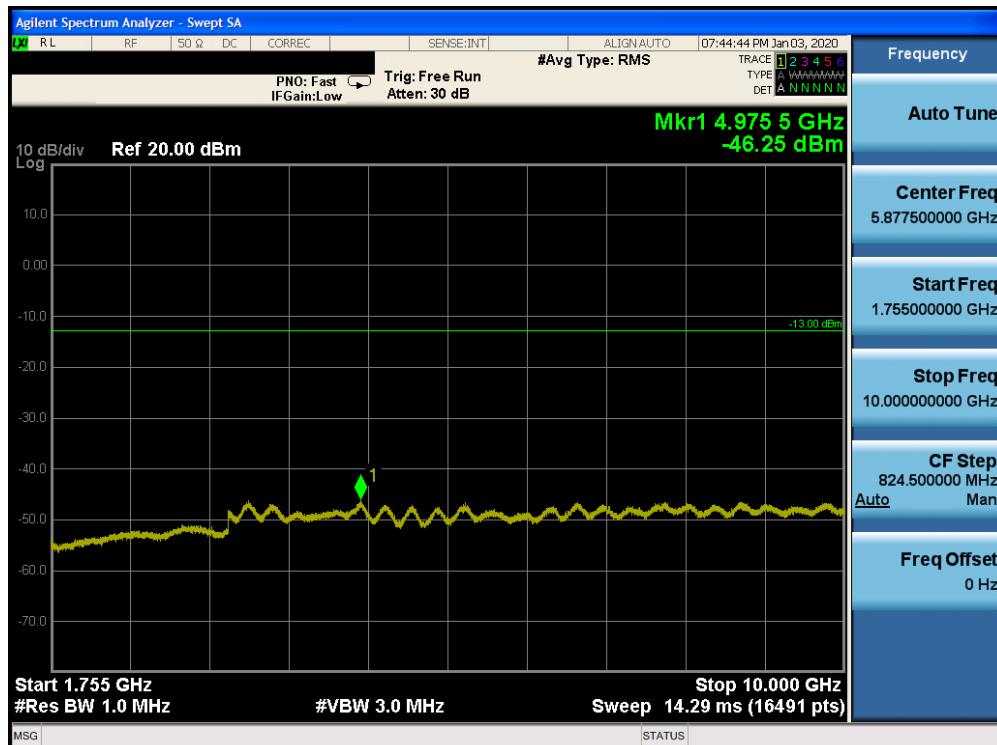


Plot 7-36. Conducted Spurious Plot (AWS WCDMA Mode - Low Channel)

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 35 of 112

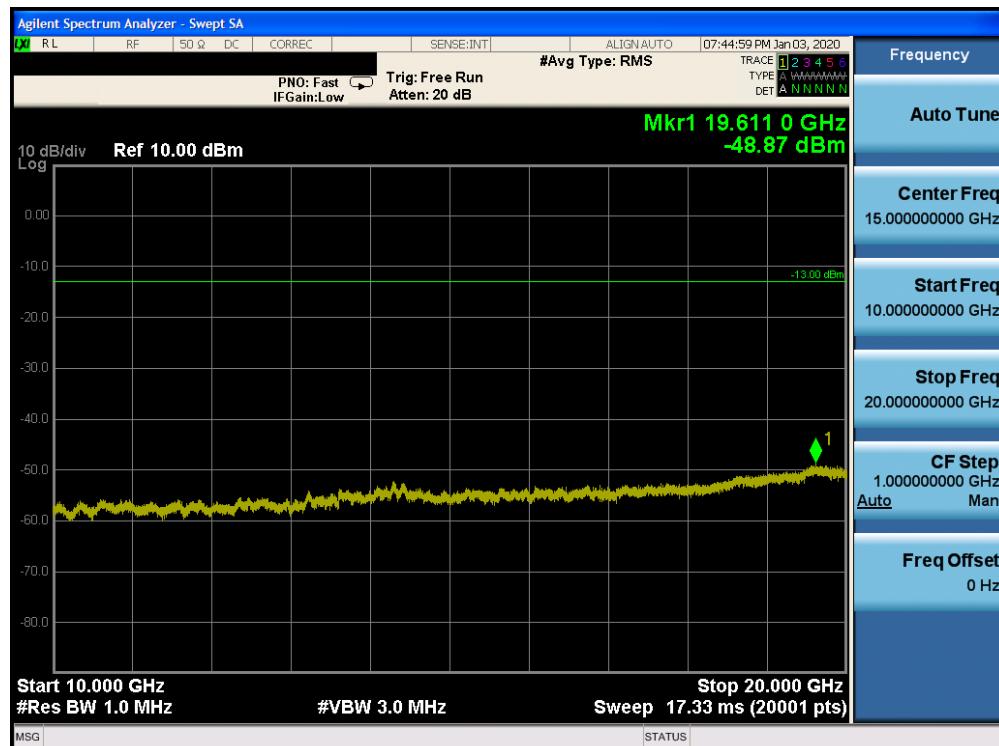


Plot 7-37. Conducted Spurious Plot (AWS WCDMA Mode - Low Channel)

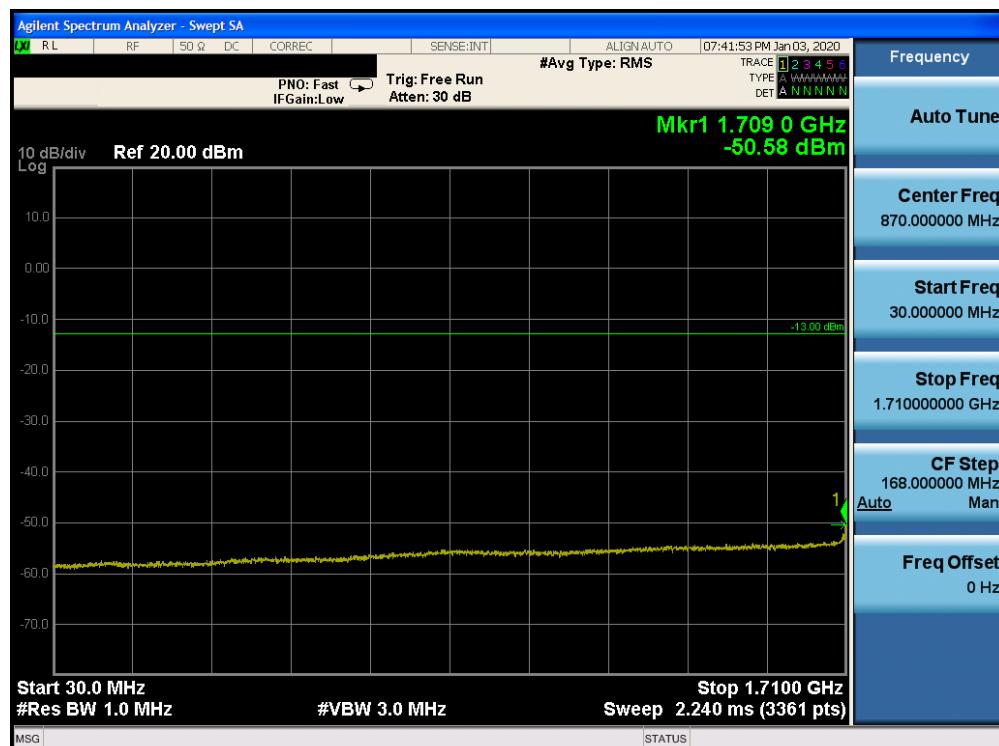


Plot 7-38. Conducted Spurious Plot (AWS WCDMA Mode - Mid Channel)

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 36 of 112	

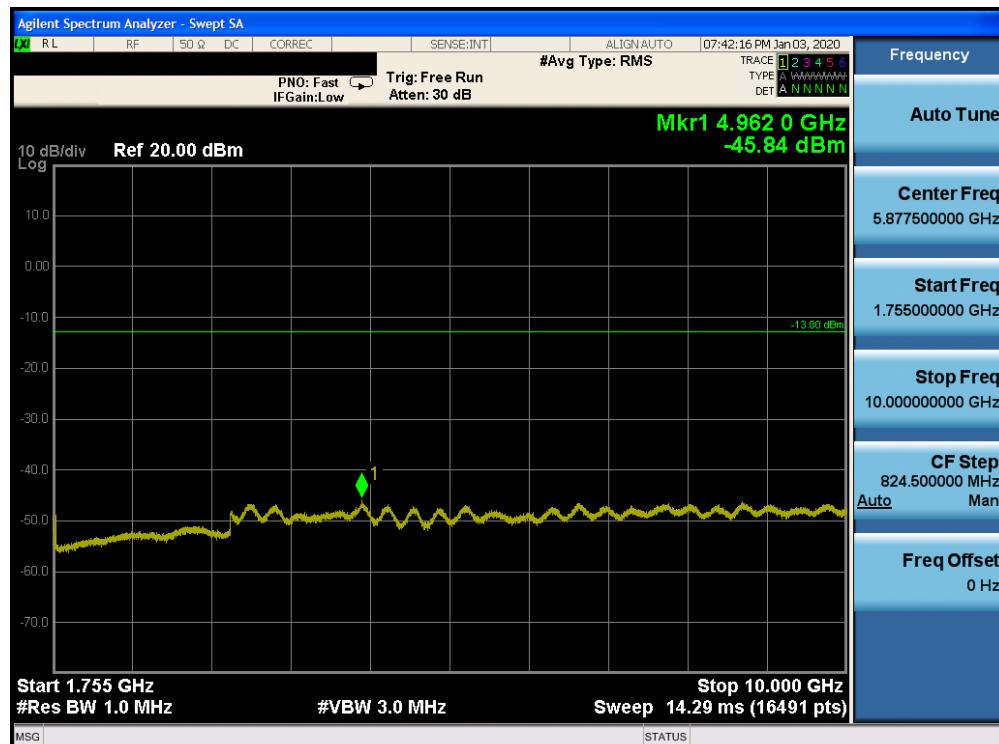


Plot 7-39. Conducted Spurious Plot (AWS WCDMA Mode - Mid Channel)

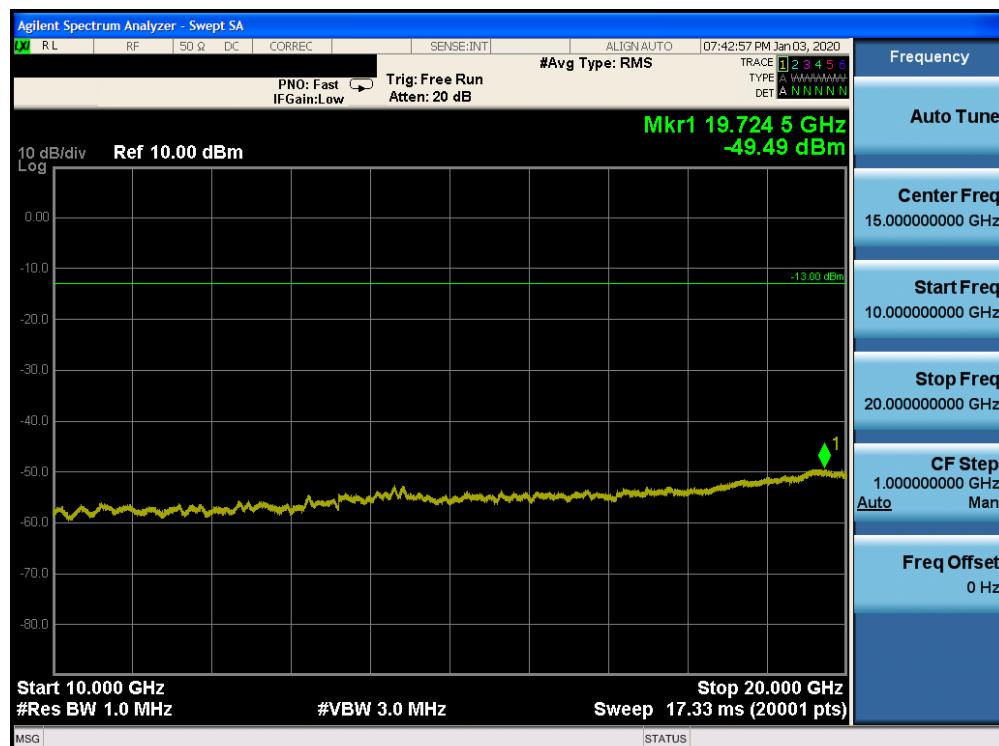


Plot 7-40. Conducted Spurious Plot (AWS WCDMA Mode - Mid Channel)

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 37 of 112	

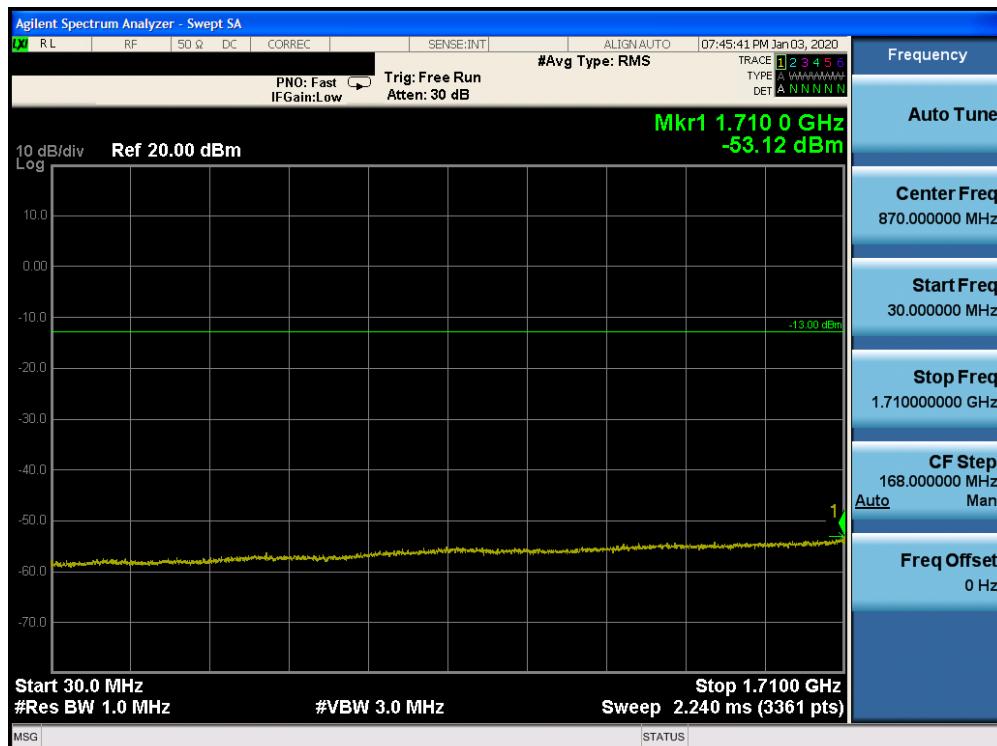


Plot 7-41. Conducted Spurious Plot (AWS WCDMA Mode - High Channel)

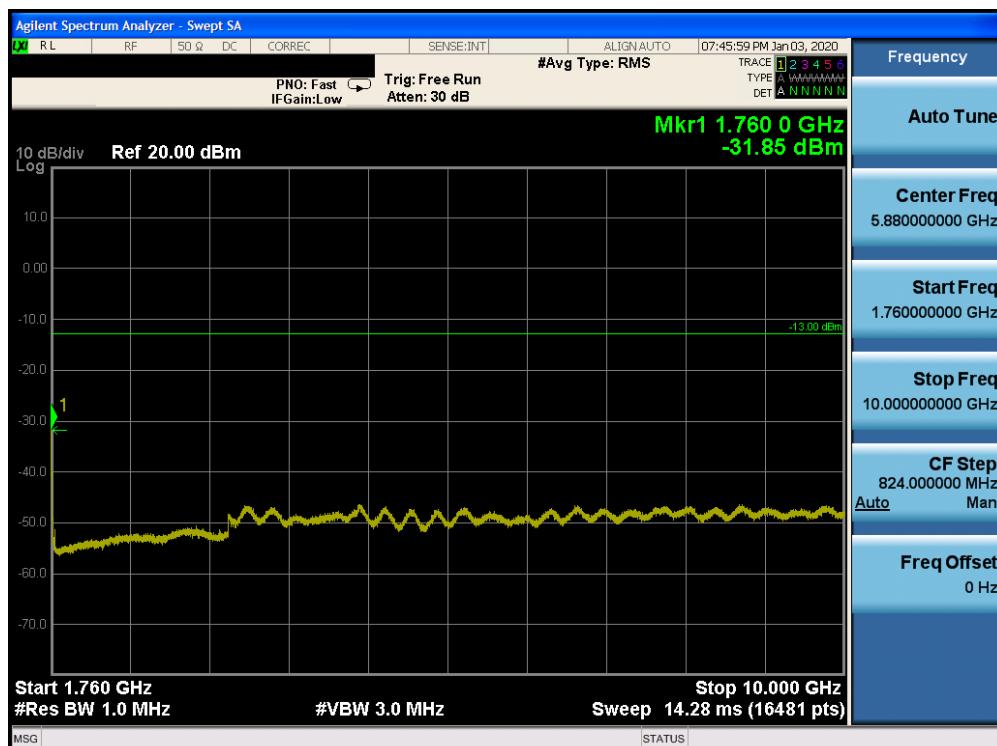

Plot 7-42. Conducted Spurious Plot (AWS WCDMA Mode - High Channel)


FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 38 of 112

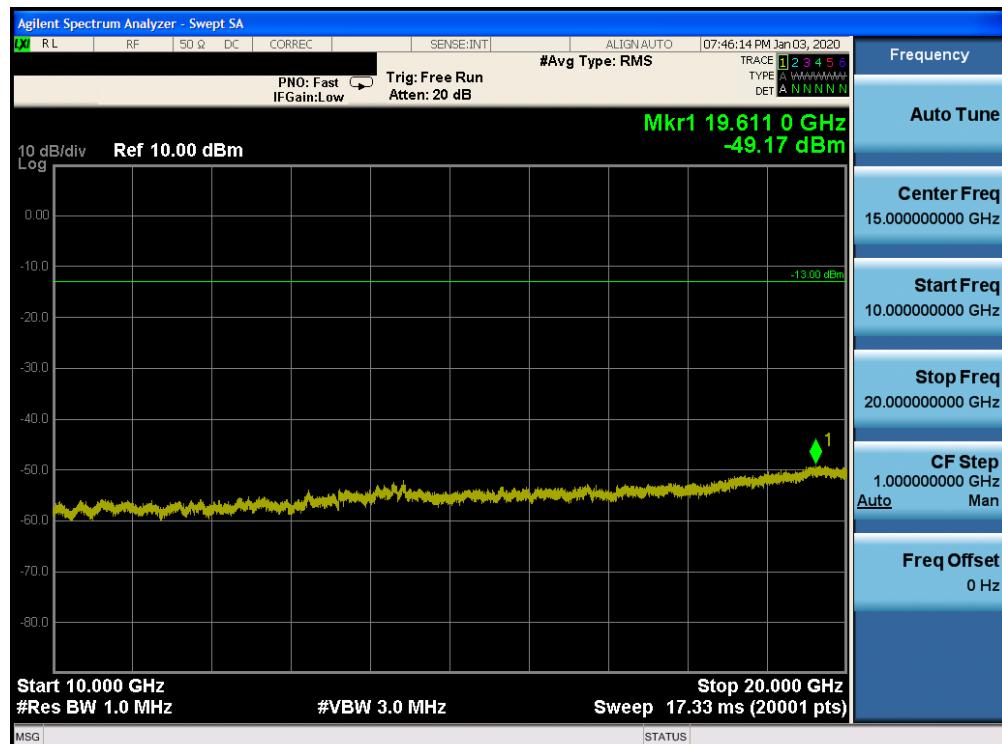


Plot 7-43. Conducted Spurious Plot (AWS WCDMA Mode - High Channel)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 39 of 112

## PCS WCDMA Mode

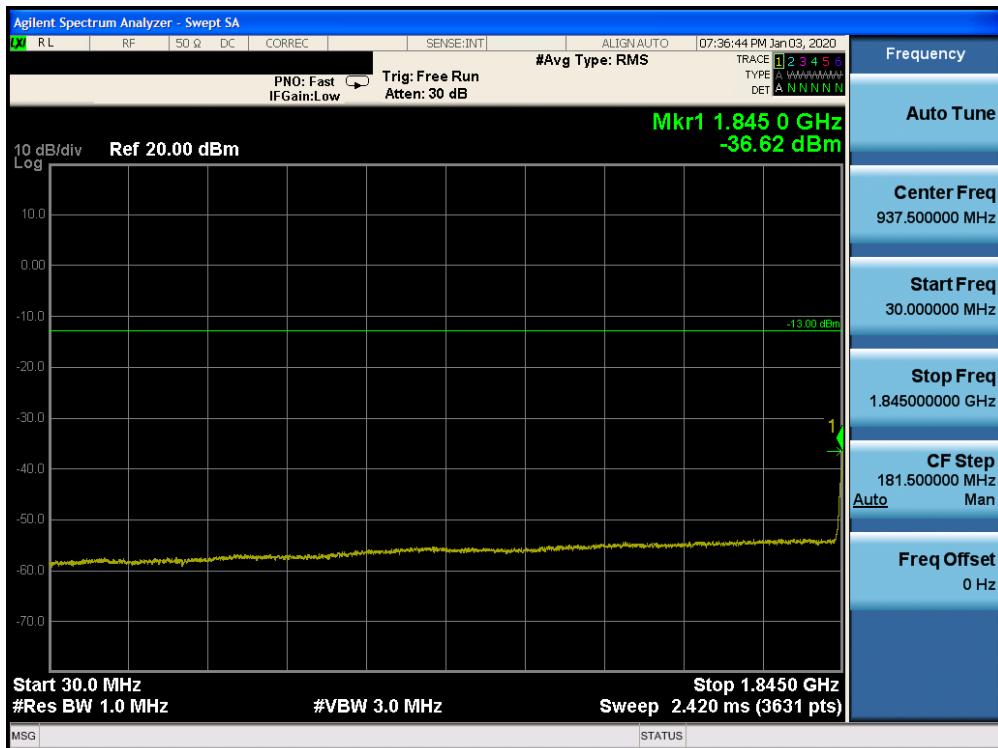


Plot 7-44. Conducted Spurious Plot (PCS WCDMA Mode - Low Channel)

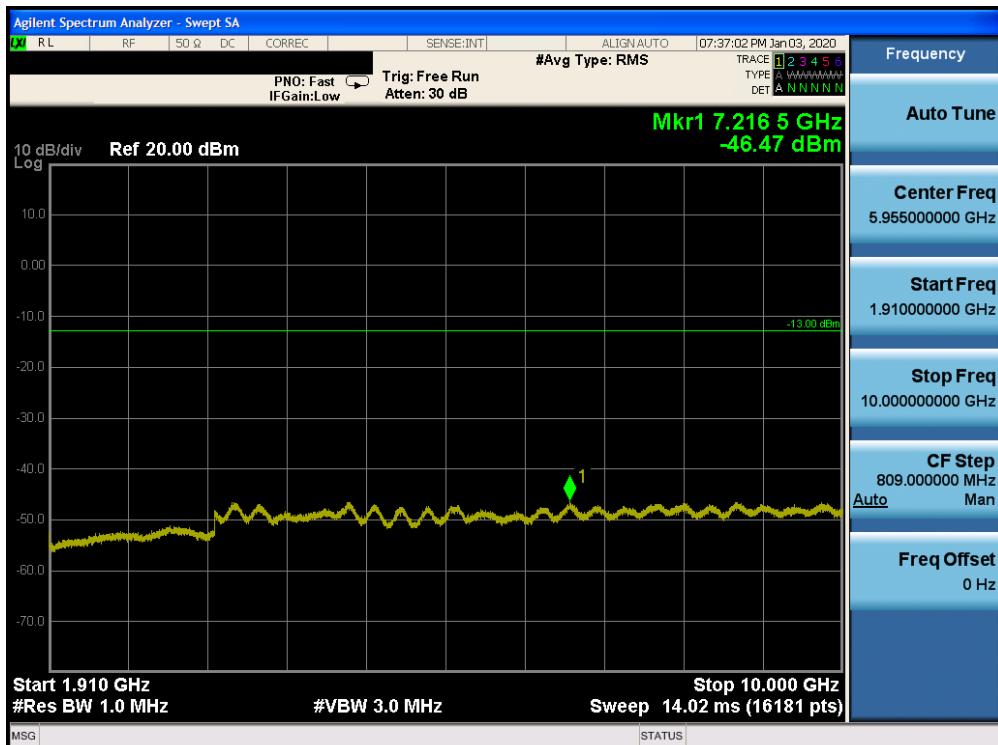


Plot 7-45. Conducted Spurious Plot (PCS WCDMA Mode - Low Channel)

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 40 of 112

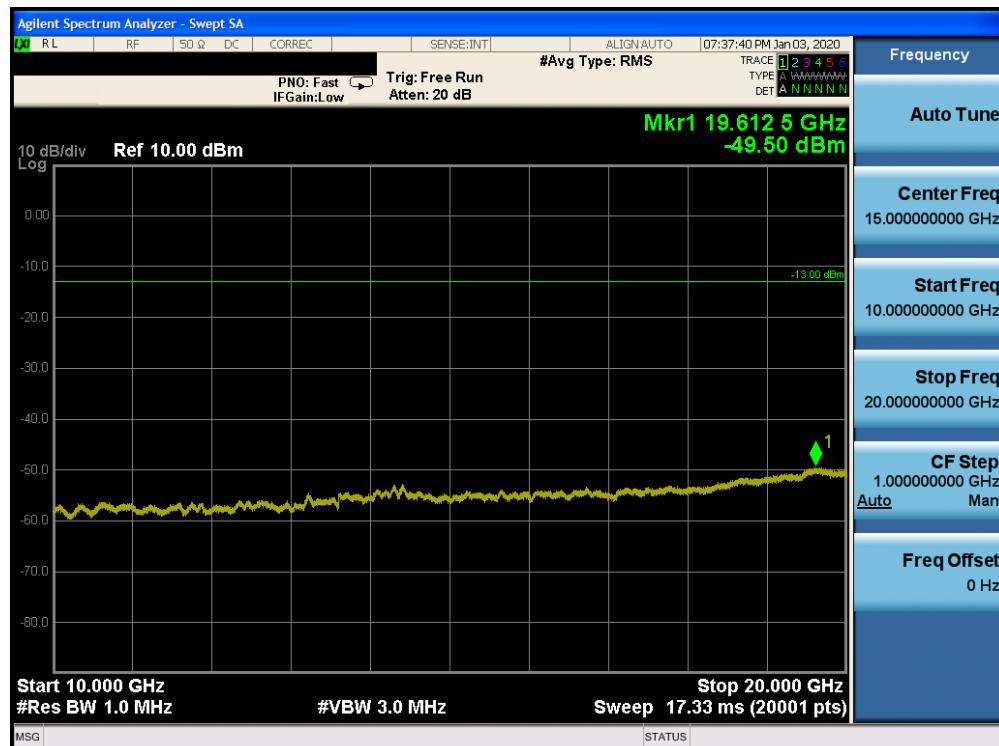


Plot 7-46. Conducted Spurious Plot (PCS WCDMA Mode - Low Channel)

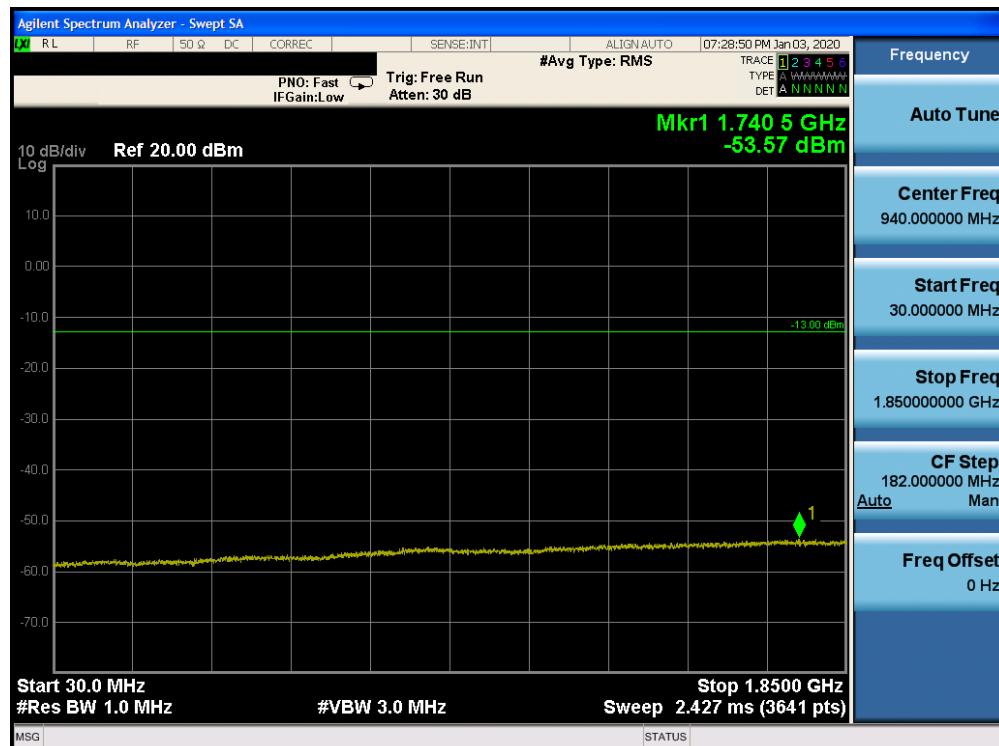


Plot 7-47. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 41 of 112	

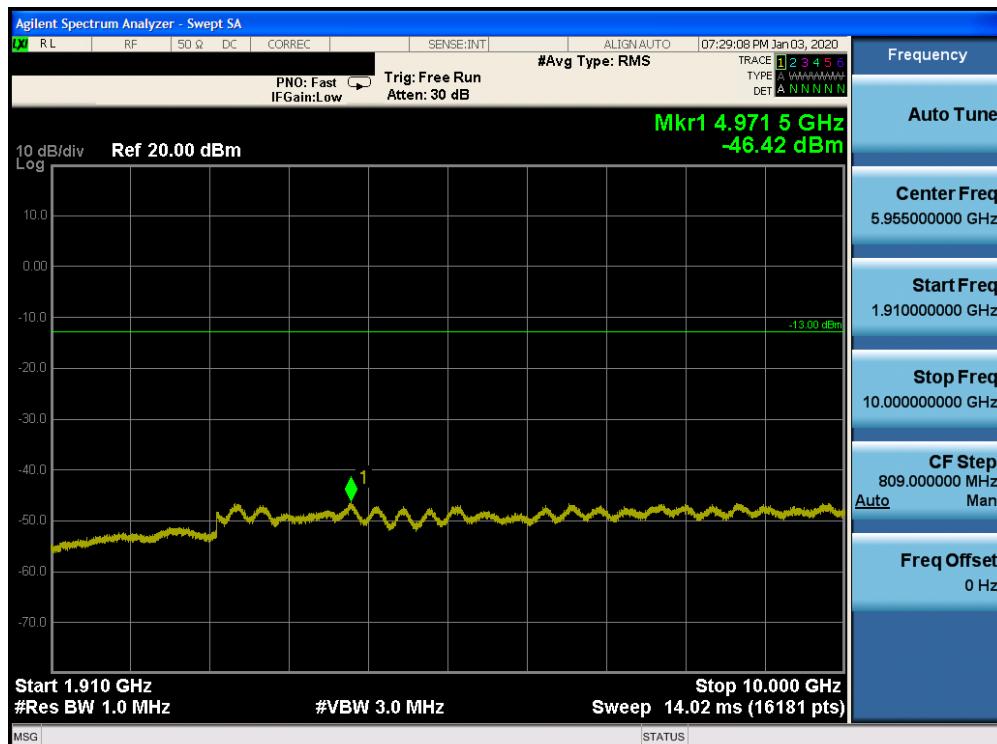

Plot 7-48. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)

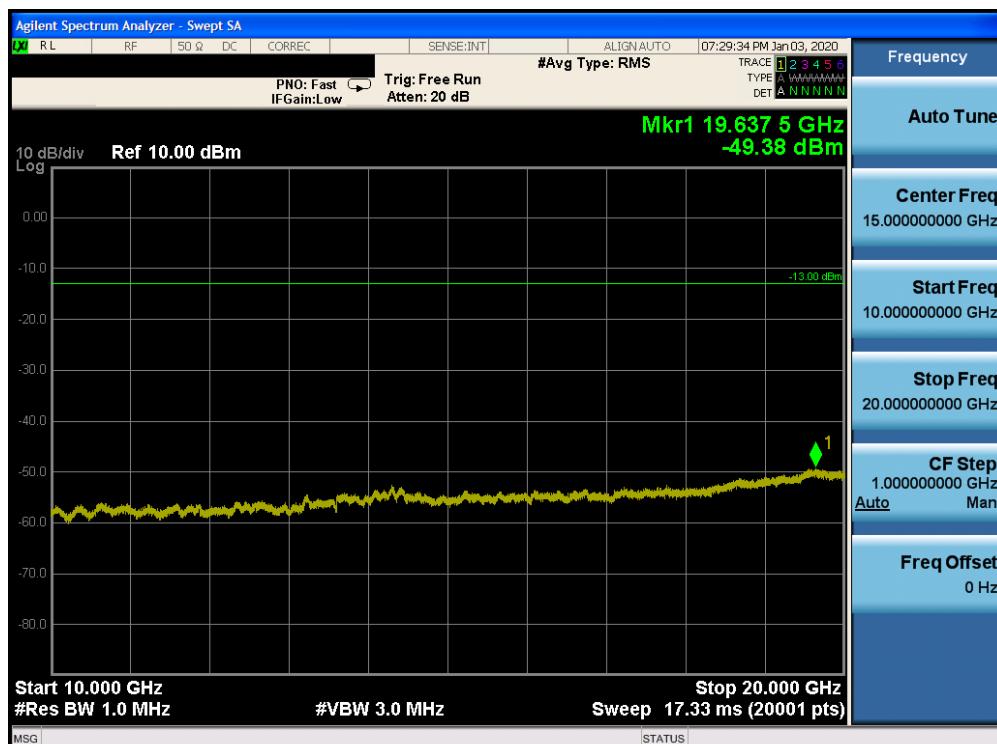


Plot 7-49. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 42 of 112	




Plot 7-50. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

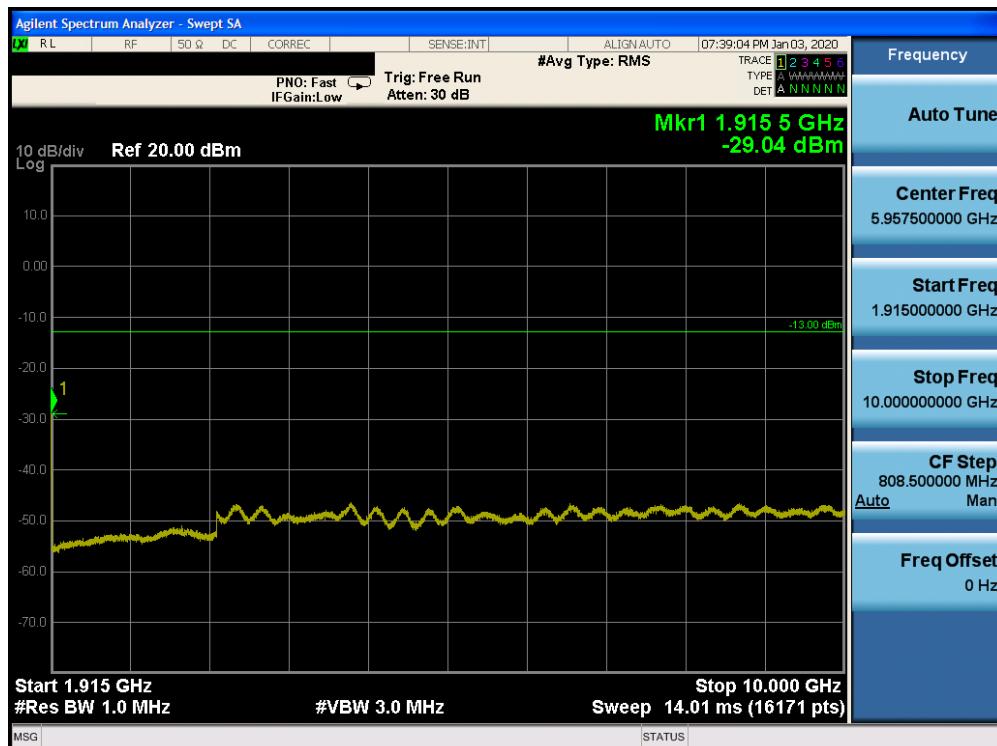

Plot 7-51. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 43 of 112

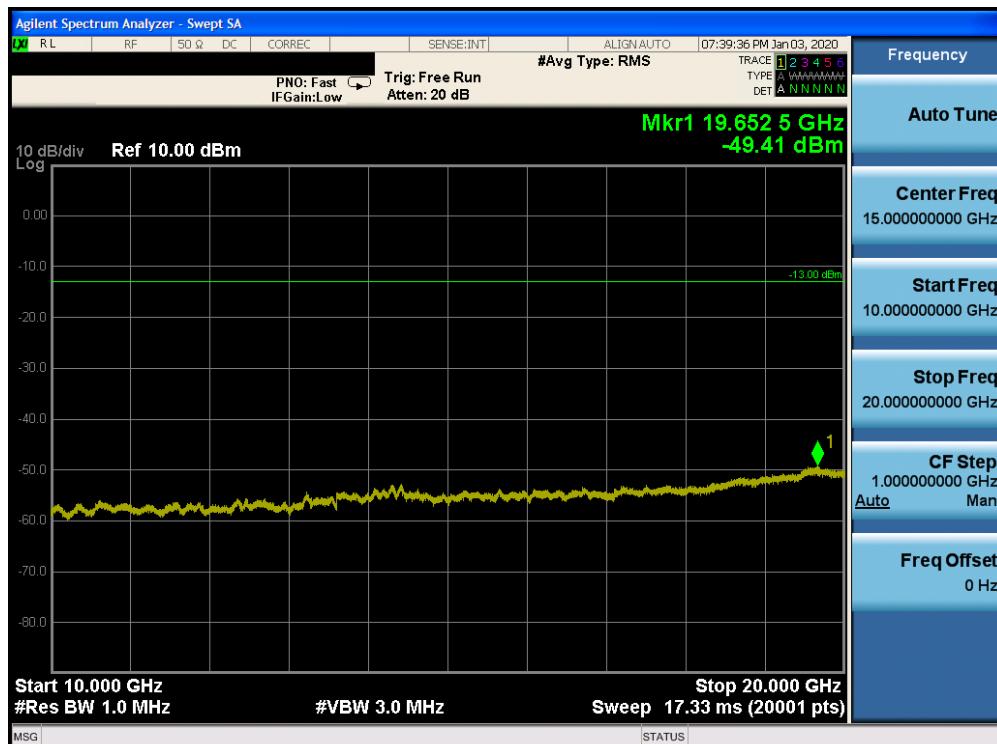

Plot 7-52. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 44 of 112

## 7.4 Band Edge Emissions at Antenna Terminal

### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

***The minimum permissible attenuation level of any spurious emission is  $43 + \log_{10}(P_{\text{Watts}})$ , where  $P$  is the transmitter power in Watts.***

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 6.0

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW  $\geq 1\%$  of the emission bandwidth
4. VBW  $\geq 3 \times$  RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times$  Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

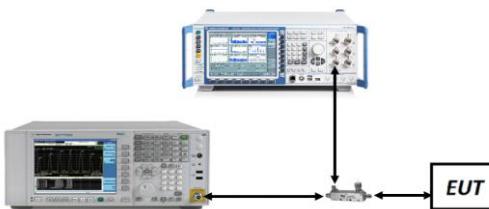


**Figure 7-3. Test Instrument & Measurement Setup**

### Test Notes


1. Per 22.917(b), 24.238(b), 27.53(h)(3), and RSS-132(5.5), RSS-133(6.5), RSS-139(6.5), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
2. All ports were tested and only the worst case data were reported.
3. Refer to Table 2-1 Section 2.3 of this test report for correlation between Antennas and Ports.

FCC ID: BCGA2230	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 45 of 112

## Cellular GPRS Mode

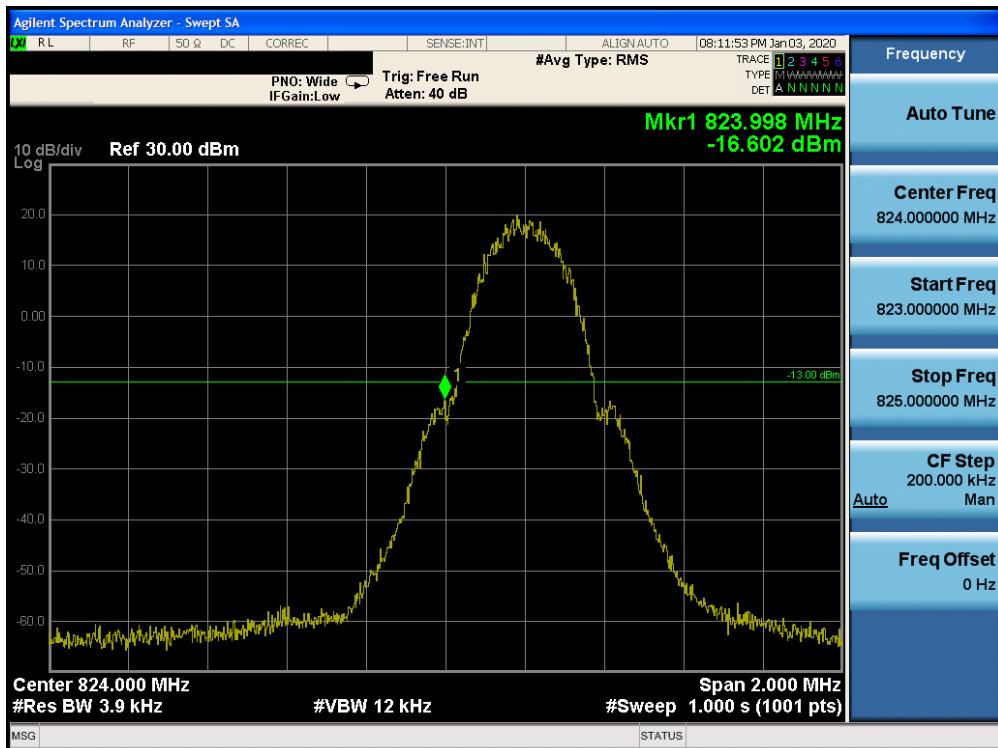


Plot 7-53. Band Edge Plot (Cellular GPRS Mode - Low Channel)

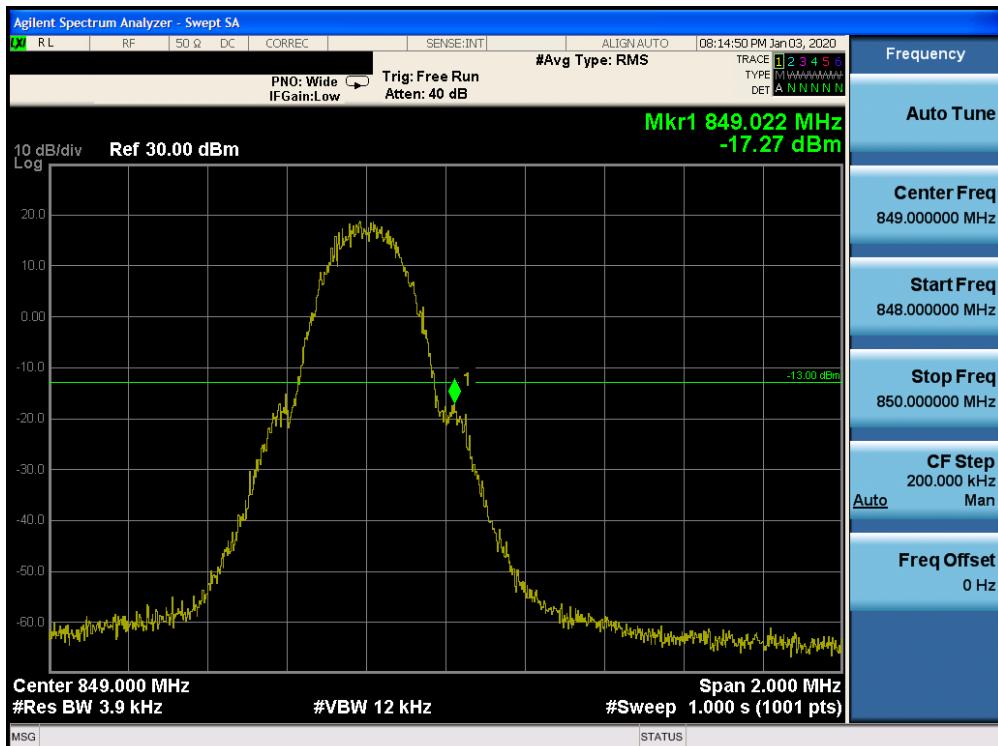


Plot 7-54. Band Edge Plot (Cellular GPRS Mode - High Channel)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device		Page 46 of 112

## PCS GPRS Mode

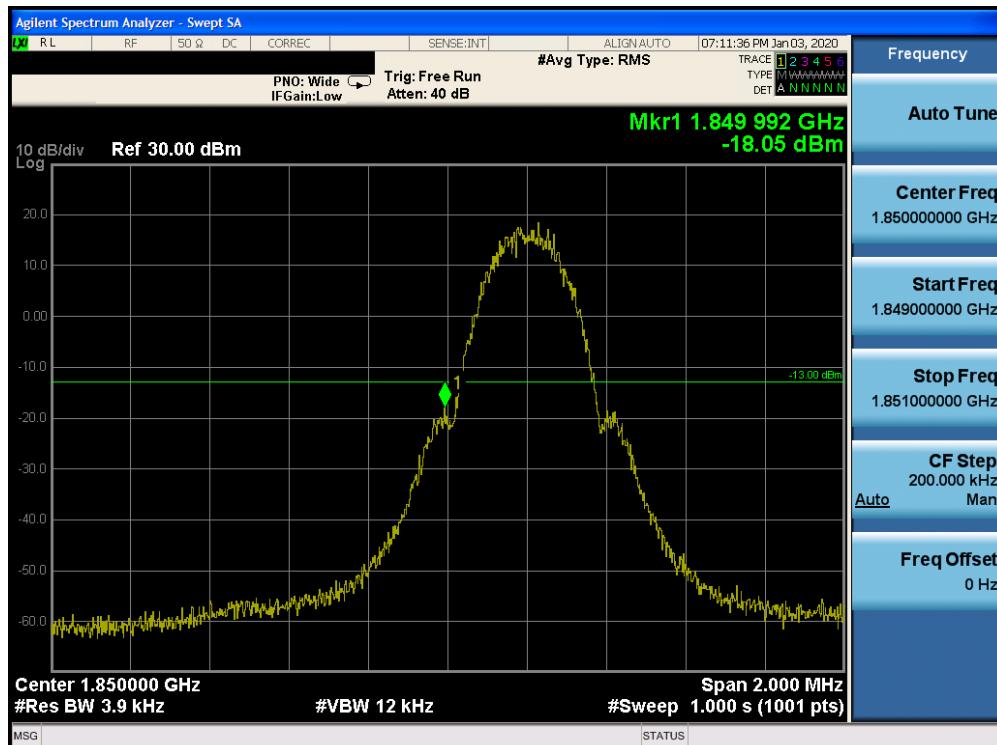


Plot 7-55. Band Edge Plot (PCS GPRS Mode - Low Channel)

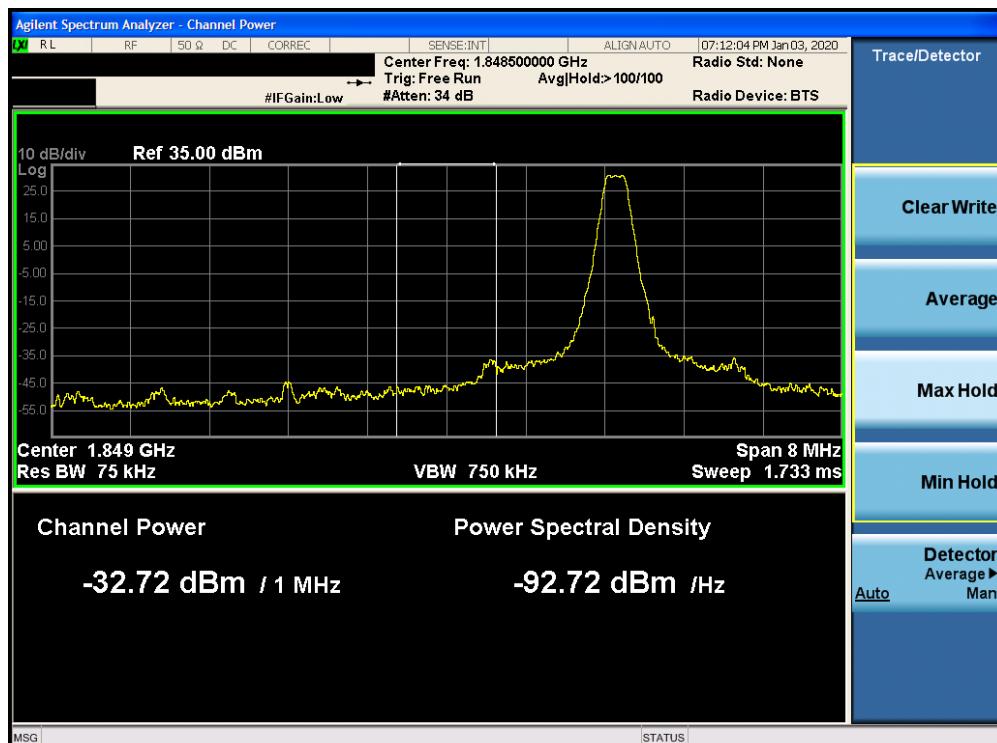


Plot 7-56. 4MHz Span Plot (PCS GPRS Mode - Low Channel)

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 47 of 112

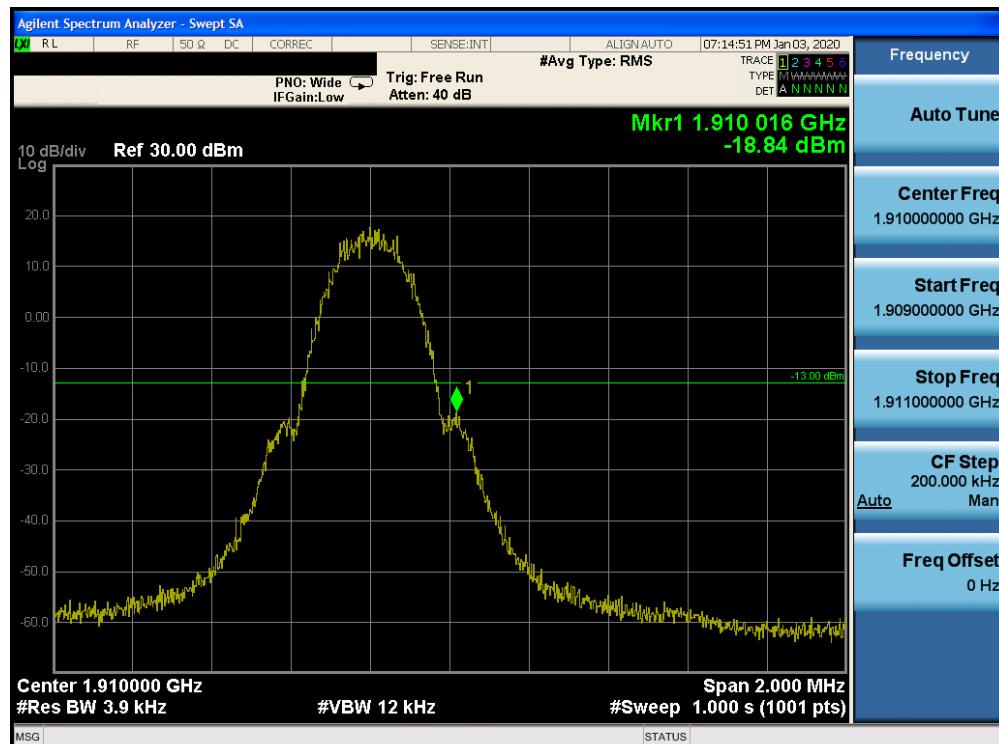


Plot 7-57. Band Edge Plot (PCS GPRS Mode - High Channel)

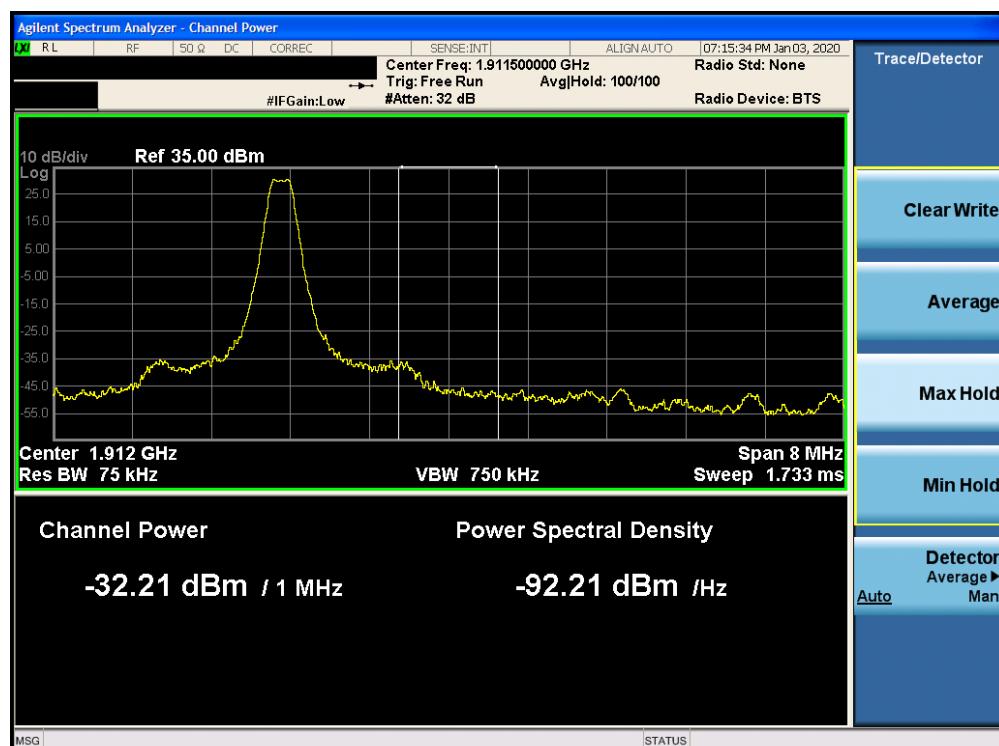

Plot 7-58. 4MHz Span Plot (PCS GPRS Mode - Low Channel)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 48 of 112

## Cellular WCDMA Mode

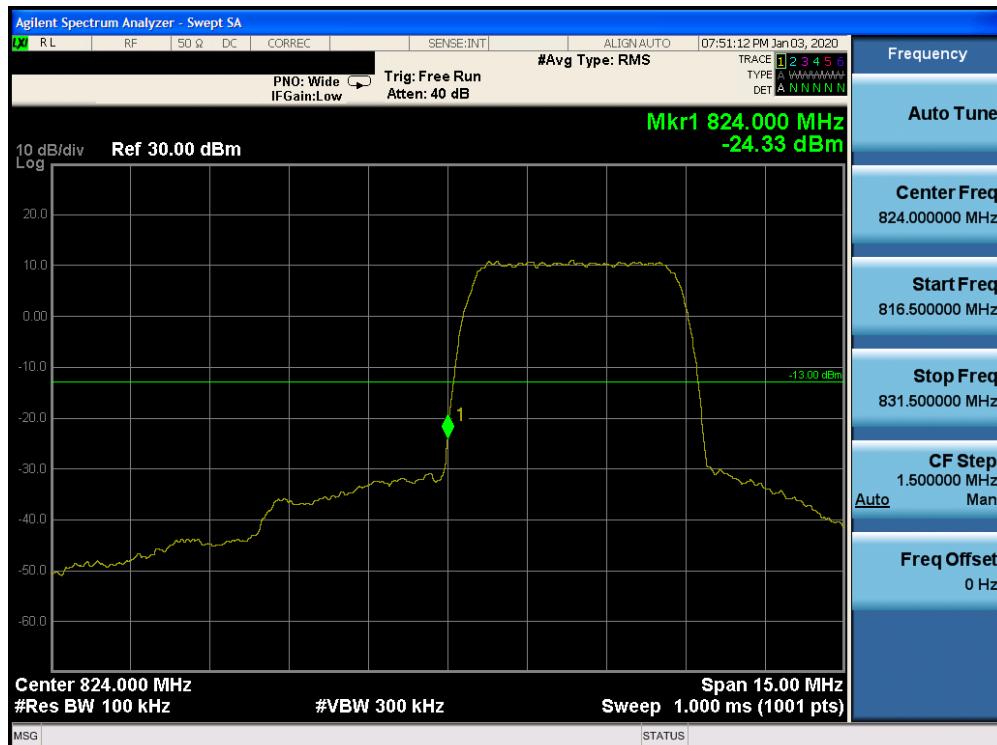

Plot 7-59. Band Edge Plot (Cellular WCDMA Mode - Low Channel)




Plot 7-60. Band Edge Plot (Cellular WCDMA Mode - High Channel)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 49 of 112

## AWS WCDMA Mode



Plot 7-61. Band Edge Plot (AWS WCDMA Mode - Low Channel)

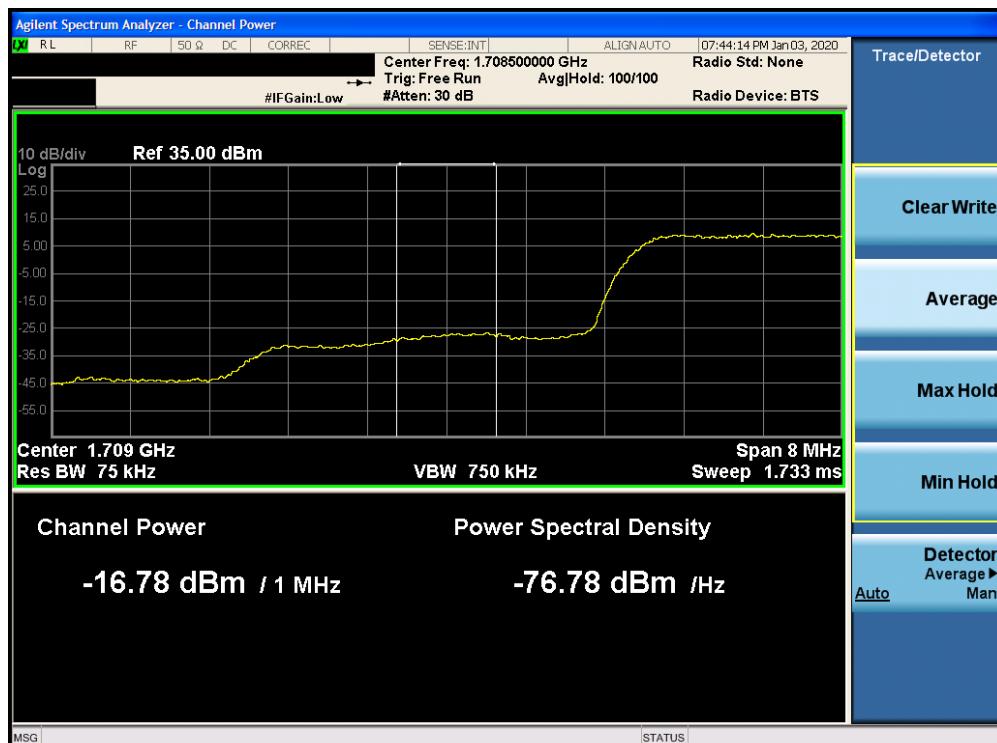


Plot 7-62. 4MHz Span Plot (AWS WCDMA Mode - Low Channel)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 50 of 112



Plot 7-63. Band Edge Plot (AWS WCDMA Mode - High Channel)

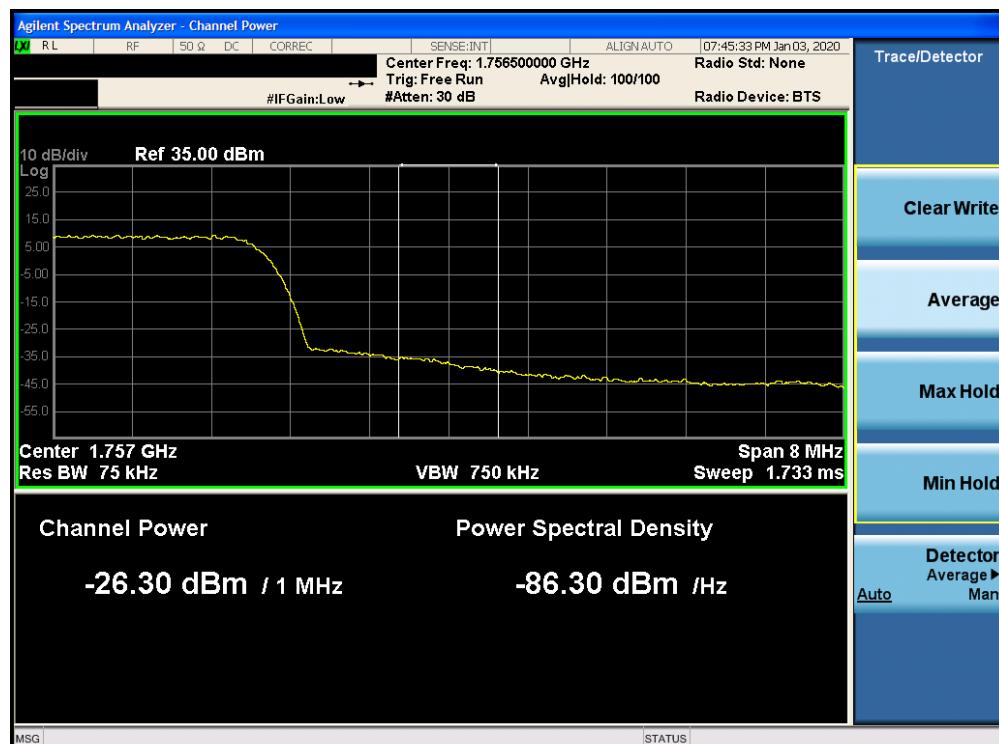


Plot 7-64. 4MHz Span Plot (AWS WCDMA Mode - High Channel)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 51 of 112

## PCS WCDMA Mode



Plot 7-65. Band Edge Plot (PCS WCDMA Mode - Low Channel)

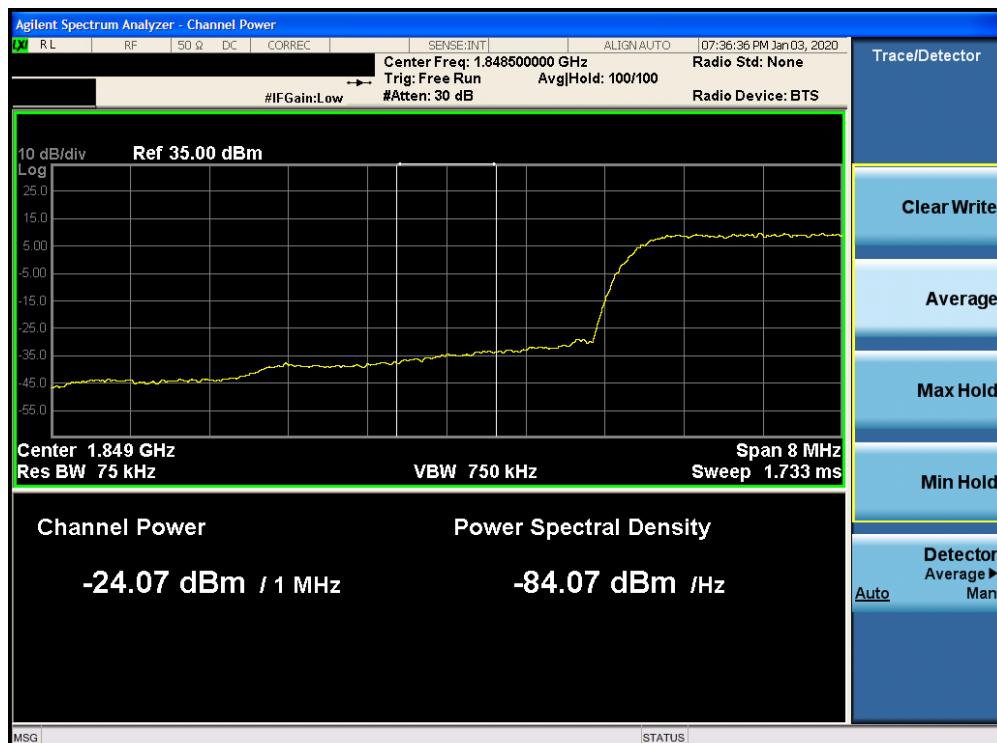


Plot 7-66. 4MHz Span Plot (PCS WCDMA Mode - Low Channel)

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 52 of 112



Plot 7-67. Band Edge Plot (PCS WCDMA Mode - High Channel)

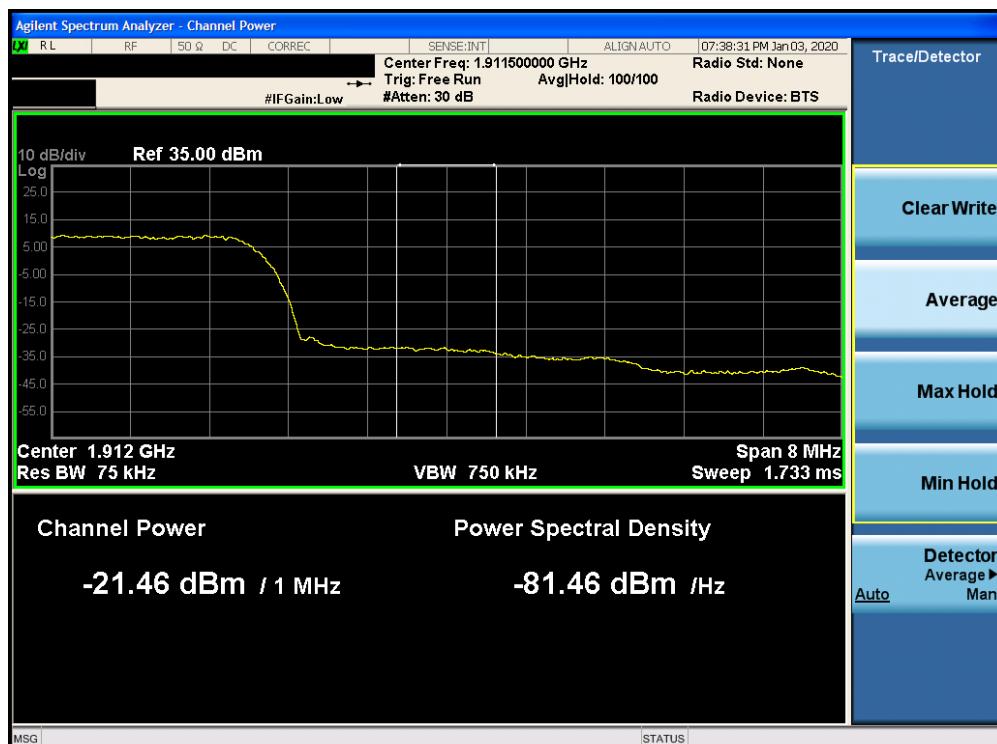

Plot 7-68. 4MHz Span Plot (PCS WCDMA Mode - High Channel)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 53 of 112

## 7.5 Peak-Average Ratio

### Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

### Test Procedure Used

KDB 971168 D01 v03r01 – Section 5.7.1

### Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

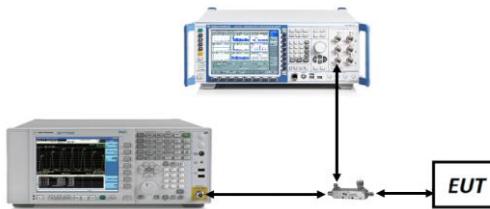


Figure 7-4. Test Instrument & Measurement Setup

### Test Notes

1. All ports were tested and only the worst case data were reported.
2. Refer to Table 2-1 Section 2.3 of this test report for correlation between Antennas and Ports.

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 54 of 112

Mode	Average Power [dBm]	PAR at 0.1% [dB]	Limit [dB]	Margin [dB]
GPRS850	32.36	0.22	13.0	-12.78
EDGE850	27.08	2.78	13.0	-10.22
WCDMA850	25.67	3.31	13.0	-9.69
WCDMA1700	25.4	3.25	13.0	-9.75
GPRS1900	30.47	0.25	13.0	-12.75
EDGE1900	25.27	3.31	13.0	-9.69
WCDMA1900	25.68	3.38	13.0	-9.62

Table 7-3. Peak-Average Ratio Results




Plot 7-69. Peak-Average Ratio Plot (Cellular GPRS Mode)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device		Page 55 of 112



Plot 7-70. Peak-Average Ratio Plot (EDGE850 Mode)

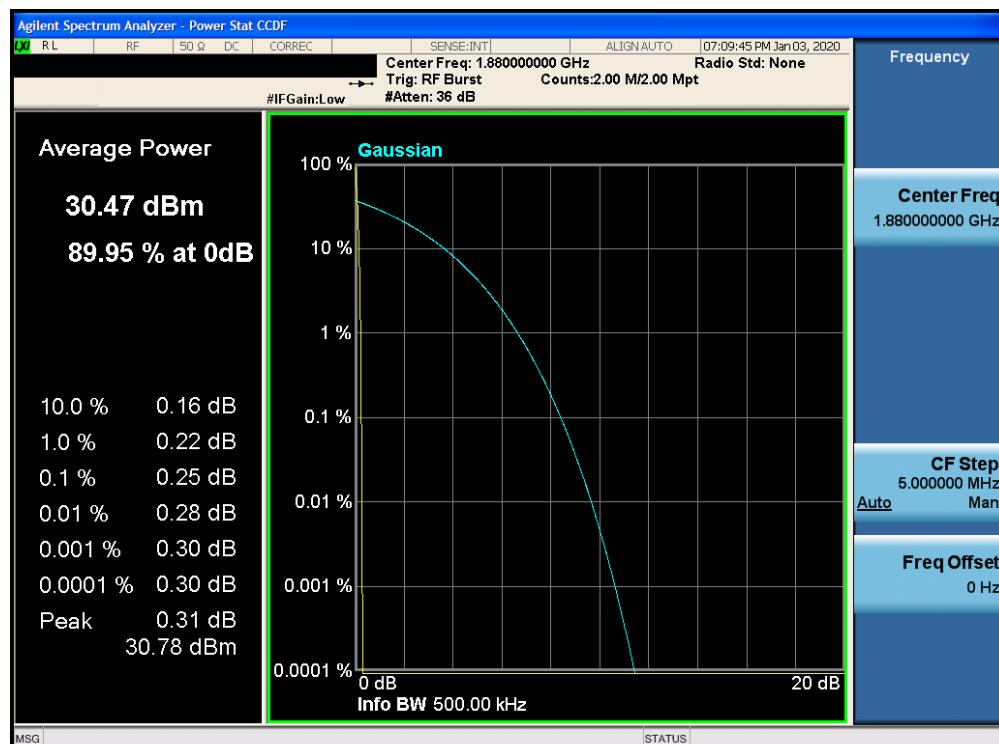

Plot 7-71. Peak-Average Ratio Plot (PCS GPRS Mode)

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 56 of 112



Plot 7-72. Peak-Average Ratio Plot (EDGE1900 Mode)



Plot 7-73. Peak-Average Ratio Plot (Cellular WCDMA Mode)

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 57 of 112



Plot 7-74. Peak-Average Ratio Plot (AWS WCDMA Mode)



Plot 7-75. Peak-Average Ratio Plot (PCS WCDMA Mode)

FCC ID: BCGA2230	PCTEST		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 58 of 112	

## 7.6 Radiated Power (ERP/EIRP)

### Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

### Test Settings

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured is:

$$\text{ERP/EIRP} = \text{PMes} - \text{LC} + \text{GT}$$

Where:

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMes, typically dBW or dBm)

PMes = measured transmitter output power or PSD, in dBW or dBm

LC = signal attenuation in the connecting cable between the transmitter and antenna in dB

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-5. ERP/EIRP Measurement Setup

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 59 of 112



### Test Notes

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 3) The Ant. Gains (GT) are listed in dBi.

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 60 of 112

### 7.6.1 Port A Radiated Power (ERP/EIRP)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
824.20	GPRS850	33.16	-0.70	<b>30.31</b>	<b>1.074</b>	38.45	-8.14	<b>32.46</b>	<b>1.762</b>	40.61	-8.15
836.60	GPRS850	33.03	-0.70	30.18	1.042	38.45	-8.27	32.33	1.710	40.61	-8.28
848.80	GPRS850	32.94	-0.70	30.09	1.021	38.45	-8.36	32.24	1.675	40.61	-8.37
824.20	EDGE850	27.37	-0.70	<b>24.52</b>	0.283	38.45	-13.93	<b>26.67</b>	<b>0.465</b>	40.61	-13.94

Table 7-4. ERP/EIRP (Cellular GPRS)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
826.40	WCDMA850	25.70	-0.70	<b>22.85</b>	<b>0.193</b>	38.45	-15.60	<b>25.00</b>	<b>0.316</b>	40.61	-15.61
836.60	WCDMA850	25.61	-0.70	22.76	0.189	38.45	-15.69	24.91	0.310	40.61	-15.70
846.60	WCDMA850	25.59	-0.70	22.74	0.188	38.45	-15.71	24.89	0.308	40.61	-15.72

Table 7-5. ERP/EIRP (Cellular WCDMA)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1712.40	WCDMA1700	25.70	-2.20	<b>23.50</b>	<b>0.224</b>	30.00	-6.50
1732.60	WCDMA1700	25.54	-2.20	23.34	0.216	30.00	-6.66
1752.60	WCDMA1700	25.68	-2.20	23.48	0.223	30.00	-6.52

Table 7-6. EIRP (AWS WCDMA)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GPRS1900	30.75	-2.20	<b>28.55</b>	<b>0.716</b>	33.01	-4.46
1880.00	GPRS1900	30.61	-2.20	28.41	0.693	33.01	-4.60
1909.80	GPRS1900	30.52	-2.20	28.32	0.679	33.01	-4.69
1850.20	EDGE1900	25.71	-2.20	<b>23.51</b>	0.224	33.01	-9.50

Table 7-7. EIRP (PCS GPRS)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	25.62	-2.20	23.42	0.220	33.01	-9.59
1880.00	WCDMA1900	25.70	-2.20	<b>23.50</b>	<b>0.224</b>	33.01	-9.51
1907.60	WCDMA1900	25.59	-2.20	23.39	0.218	33.01	-9.62

Table 7-8. EIRP (PCS WCDMA)

FCC ID: BCGA2230	MEASUREMENT REPORT (CERTIFICATION)						Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device					Page 61 of 112

## 7.6.2 Port B Radiated Power (ERP/EIRP)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
824.20	GPRS850	31.75	-0.60	<b>29.00</b>	<b>0.794</b>	38.45	-9.45	<b>31.15</b>	<b>1.303</b>	40.61	-9.46
836.60	GPRS850	31.59	-0.60	28.84	0.766	38.45	-9.61	30.99	1.256	40.61	-9.62
848.80	GPRS850	31.54	-0.60	28.79	0.757	38.45	-9.66	30.94	1.242	40.61	-9.67
824.20	EDGE850	25.73	-0.60	<b>22.98</b>	0.199	38.45	-15.47	<b>25.13</b>	0.326	40.61	-15.48

Table 7-9. ERP/EIRP (Cellular GPRS)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
826.40	WCDMA850	24.47	-0.60	21.72	0.149	38.45	-16.73	23.87	0.244	40.61	-16.74
836.60	WCDMA850	24.45	-0.60	21.70	0.148	38.45	-16.75	23.85	0.243	40.61	-16.76
846.60	WCDMA850	24.50	-0.60	<b>21.75</b>	<b>0.150</b>	38.45	-16.70	<b>23.90</b>	<b>0.245</b>	40.61	-16.71

Table 7-10. ERP/EIRP (Cellular WCDMA)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1712.40	WCDMA1700	23.18	-2.70	20.48	0.112	30.00	-9.52
1732.50	WCDMA1700	23.15	-2.70	20.45	0.111	30.00	-9.55
1752.50	WCDMA1700	23.25	-2.70	<b>20.55</b>	<b>0.114</b>	30.00	-9.45

Table 7-11. EIRP (AWS WCDMA)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GPRS1900	28.24	-2.60	<b>25.64</b>	<b>0.366</b>	33.01	-7.37
1880.00	GPRS1900	28.03	-2.60	25.43	0.349	33.01	-7.58
1909.80	GPRS1900	28.03	-2.60	25.43	0.349	33.01	-7.58
1850.20	EDGE1900	23.22	-2.60	<b>20.62</b>	0.115	33.01	-12.39

Table 7-12. EIRP (PCS GPRS)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	23.22	-2.60	<b>20.62</b>	<b>0.115</b>	33.01	-12.39
1880.00	WCDMA1900	23.18	-2.60	20.58	0.114	33.01	-12.43
1907.60	WCDMA1900	23.17	-2.60	20.57	0.114	33.01	-12.44

Table 7-13. EIRP (PCS WCDMA)

FCC ID: BCGA2230	MEASUREMENT REPORT (CERTIFICATION)						Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device					Page 62 of 112

### 7.6.3 Port C Radiated Power (ERP/EIRP)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1712.40	WCDMA1700	24.94	-1.50	23.44	0.221	30.00	-6.56
1732.60	WCDMA1700	25.00	-1.50	<b>23.50</b>	<b>0.224</b>	30.00	-6.50
1752.60	WCDMA1700	24.96	-1.50	23.46	0.222	30.00	-6.54

Table 7-14. EIRP (AWS WCDMA)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GPRS1900	30.24	-1.70	<b>28.54</b>	<b>0.714</b>	33.01	-4.47
1880.00	GPRS1900	30.14	-1.70	28.44	0.698	33.01	-4.57
1909.80	GPRS1900	30.12	-1.70	28.42	0.695	33.01	-4.59
1850.20	EDGE1900	25.25	-1.70	<b>23.55</b>	0.226	33.01	-9.46

Table 7-15. EIRP (PCS GPRS)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	24.98	-1.70	23.28	0.213	33.01	-9.73
1880.00	WCDMA1900	25.00	-1.70	<b>23.30</b>	<b>0.214</b>	33.01	-9.71
1907.60	WCDMA1900	24.92	-1.70	23.22	0.210	33.01	-9.79

Table 7-16. EIRP (PCS WCDMA)

FCC ID: BCGA2230	 <b>PCTEST</b>	MEASUREMENT REPORT (CERTIFICATION)				Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device				

#### 7.6.4 Port D Radiated Power (ERP/EIRP)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1712.40	WCDMA1700	22.96	-1.20	21.76	0.150	30.00	-8.24
1732.50	WCDMA1700	23.00	-1.20	<b>21.80</b>	<b>0.151</b>	30.00	-8.20
1752.50	WCDMA1700	22.94	-1.20	21.74	0.149	30.00	-8.26

Table 7-17. EIRP (AWS WCDMA)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GPRS1900	28.23	-0.30	27.93	0.621	33.01	-5.08
1880.00	GPRS1900	28.25	-0.30	<b>27.95</b>	<b>0.624</b>	33.01	-5.06
1909.80	GPRS1900	28.16	-0.30	27.86	0.611	33.01	-5.15
1880.00	EDGE1900	23.24	-0.30	<b>22.94</b>	0.197	33.01	-10.07

Table 7-18. EIRP (PCS GPRS)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	22.69	-0.30	22.39	0.173	33.01	-10.62
1880.00	WCDMA1900	23.00	-0.30	<b>22.70</b>	<b>0.186</b>	33.01	-10.31
1907.60	WCDMA1900	22.66	-0.30	22.36	0.172	33.01	-10.65

Table 7-19. EIRP (PCS WCDMA)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device			Page 64 of 112

## 7.7 Radiated Spurious Emissions Measurements

### Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12

### Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq$  3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq$  2 x span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: BCGA2230	 PCTEST <sup>®</sup>		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 65 of 112	

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

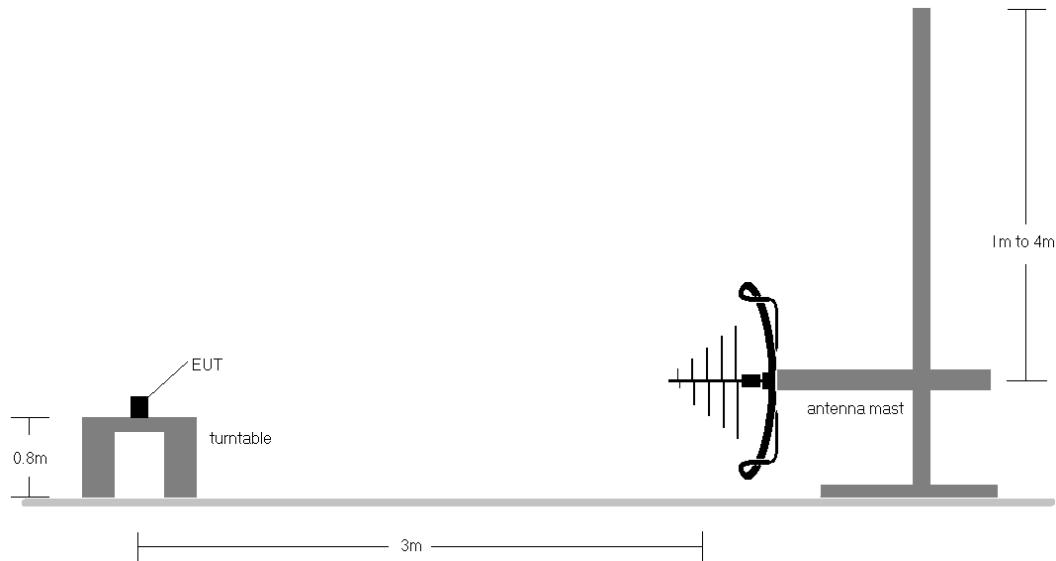


Figure 7-6. Test Instrument & Measurement Setup < 1GHz

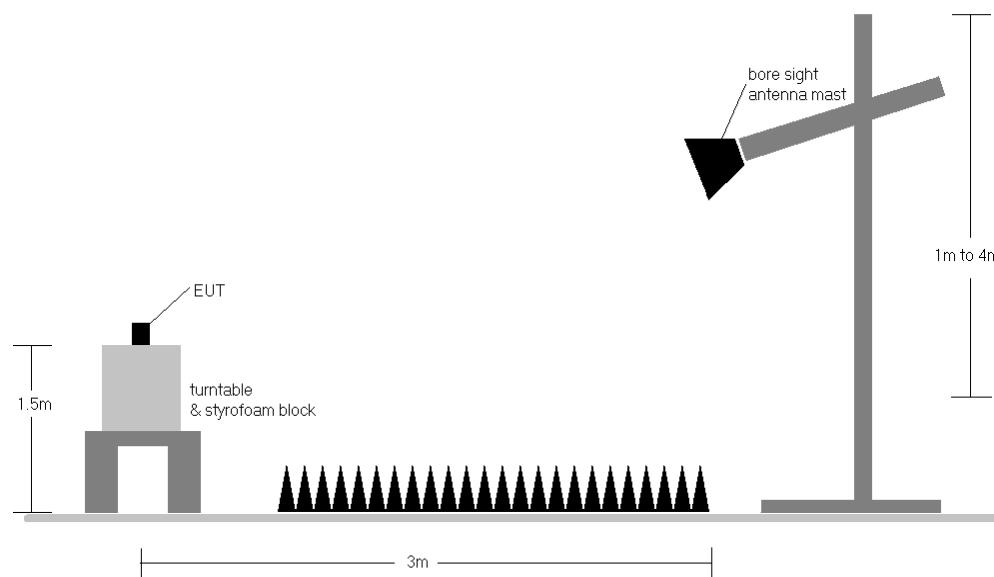


Figure 7-7. Test Instrument & Measurement Setup > 1GHz

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 66 of 112


## Test Notes

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 3) This unit was tested with its standard battery.
- 4) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 5) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 6) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 7) The "-" shown in the following RSE tables are used to denote a noise floor measurement.
- 8) Below 1GHz prescan plot shows no significant emissions.


FCC ID: BCGA2230	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 67 of 112

## 7.7.1 ANT 3 (Port A) Radiated Spurious Emissions Measurements

### Cellular GPRS Mode

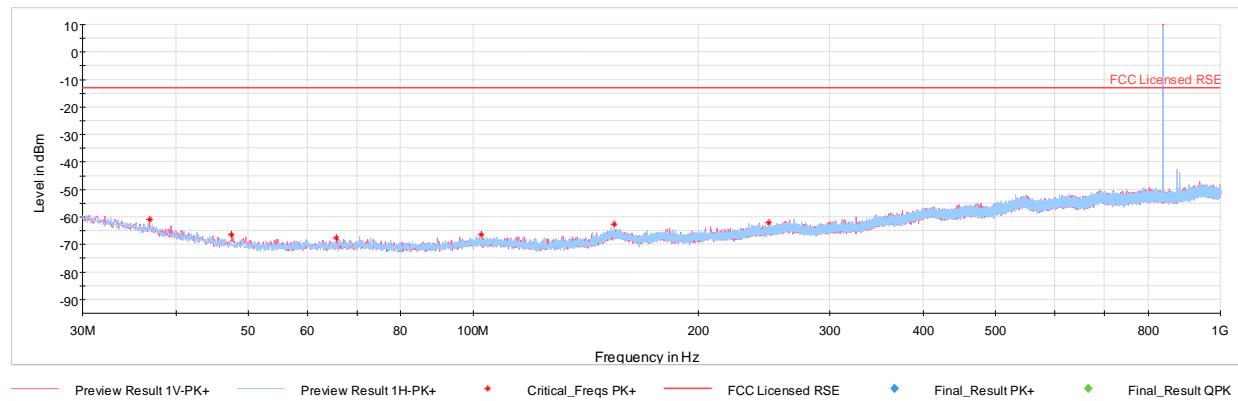

Plot 7-76. Radiated Spurious Plot Below 1GHz (Cellular GPRS Mode) with AC/DC Adapter

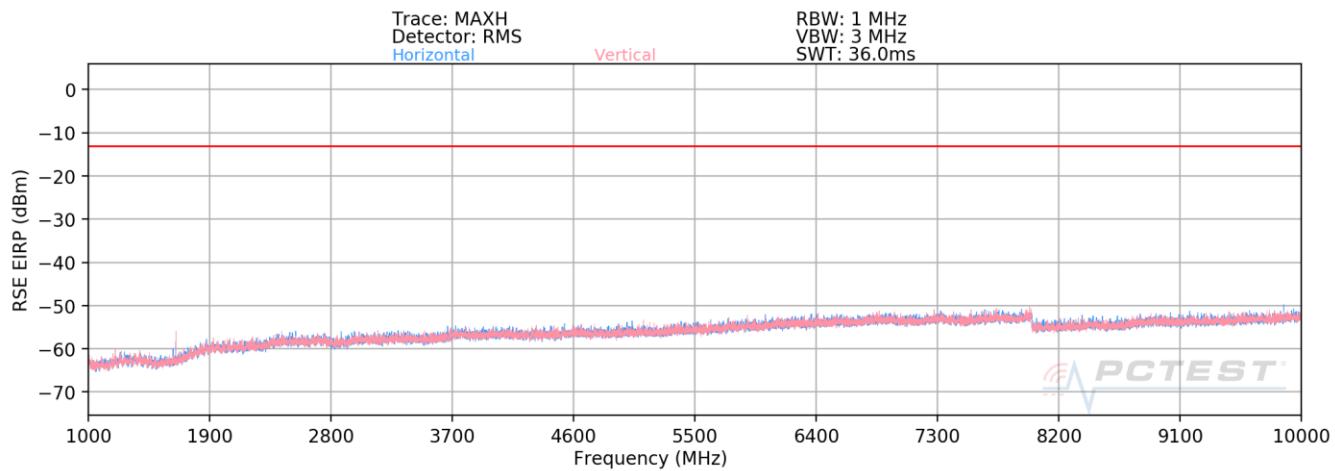

Plot 7-77. Radiated Spurious Plot Above 1GHz (Cellular GPRS Mode)

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 68 of 112

OPERATING FREQUENCY:	824.20	MHz
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1648.40	V	135	141	-57.51	5.38	-52.13	-39.1
2472.60	V	-	-	-59.94	5.91	-54.04	-41.0
3296.80	V	-	-	-61.78	7.82	-53.96	-41.0
4121.00	V	-	-	-61.20	8.97	-52.23	-39.2

Table 7-20. Radiated Spurious Data (Cellular GPRS Mode – Ch. 128)

OPERATING FREQUENCY:	836.60	MHz
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	V	160	137	-58.55	5.60	-52.95	-40.0
2509.80	V	-	-	-61.24	5.90	-55.34	-42.3
3346.40	V	-	-	-61.45	7.95	-53.51	-40.5
4183.00	V	-	-	-62.01	9.13	-52.88	-39.9

Table 7-21. Radiated Spurious Data (Cellular GPRS Mode – Ch. 190)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 69 of 112




OPERATING FREQUENCY: 848.80 MHz  
MODULATION SIGNAL: GPRS (GMSK)  
DISTANCE: 3 meters  
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1697.60	V	135	137	-60.41	5.62	-54.80	-41.8
2546.40	V	-	-	-61.65	6.02	-55.63	-42.6
3395.20	V	-	-	-61.33	8.09	-53.24	-40.2
4244.00	V	-	-	-62.17	9.20	-52.97	-40.0

Table 7-22. Radiated Spurious Data (Cellular GPRS Mode – Ch. 251)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 70 of 112

## Cellular WCDMA Mode

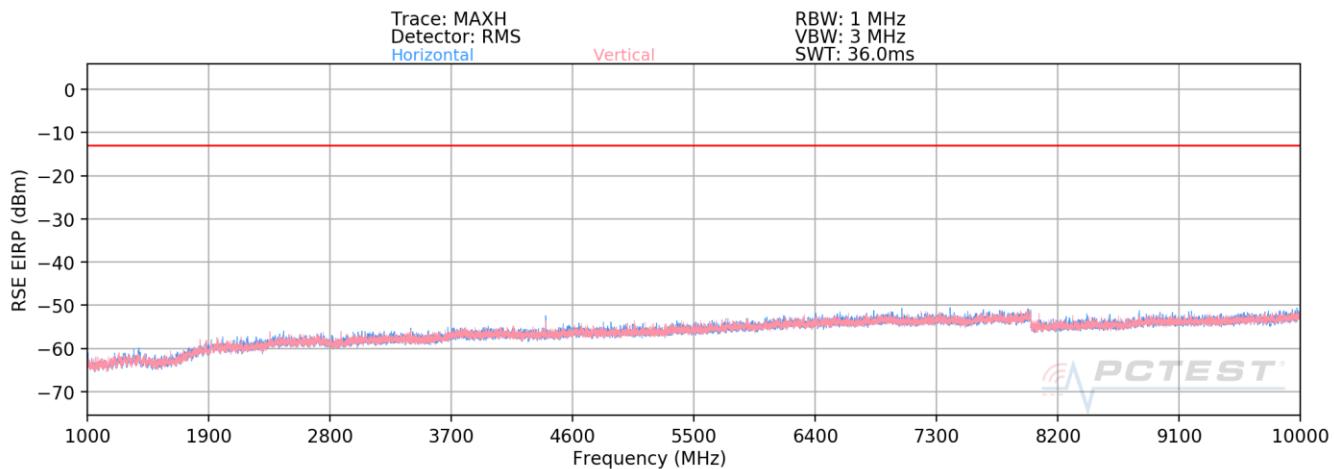

Plot 7-78. Radiated Spurious Plot Above 1GHz (Cellular WCDMA Mode)

OPERATING FREQUENCY:	826.40	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1652.80	V	-	-	-73.60	5.43	-68.17	-55.2
2479.20	V	-	-	-69.82	5.93	-63.89	-50.9
3305.60	V	-	-	-70.88	7.84	-63.04	-50.0

Table 7-23. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4132)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 71 of 112

OPERATING FREQUENCY:	836.60	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	V	-	-	-73.57	5.60	-67.97	-55.0
2509.80	V	-	-	-69.87	5.90	-63.97	-51.0
3346.40	V	-	-	-70.99	7.95	-63.05	-50.0

Table 7-24. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4183)

OPERATING FREQUENCY:	846.60	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1693.20	V	-	-	-73.12	5.64	-67.48	-54.5
2539.80	V	-	-	-70.12	5.98	-64.14	-51.1
3386.40	V	-	-	-71.31	8.07	-63.24	-50.2

Table 7-25. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4233)

FCC ID: BCGA2230	 PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 72 of 112

## 7.7.2 ANT 4b (Port A) Radiated Spurious Emissions Measurements

### AWS WCDMA Mode

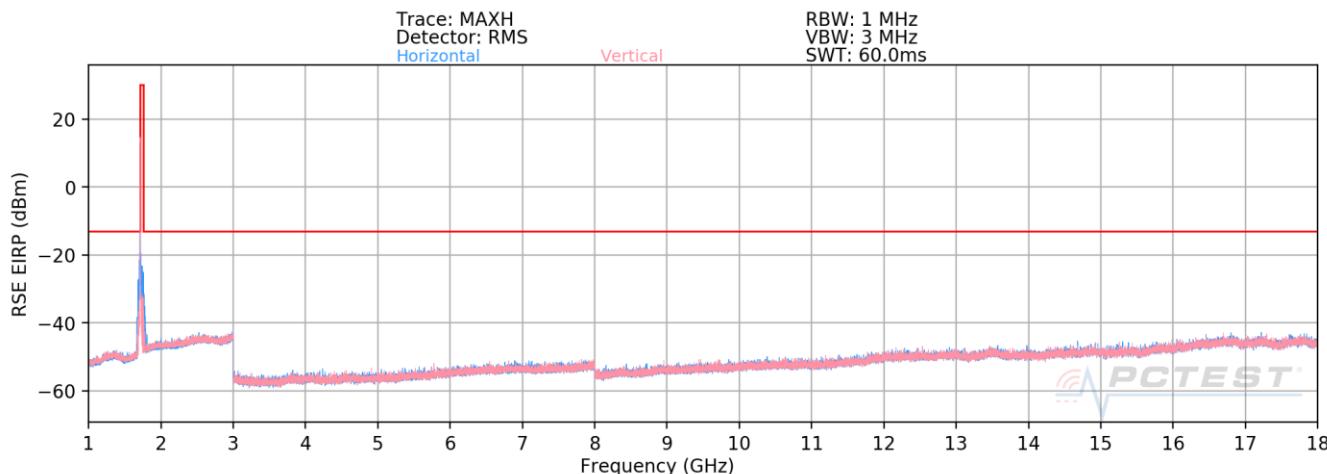

Plot 7-79. Radiated Spurious Plot Above 1GHz (AWS WCDMA Mode)

OPERATING FREQUENCY:	1712.40	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3424.80	H	-	-	-70.43	8.12	-62.32	-49.3
5137.20	H	-	-	-71.35	10.11	-61.24	-48.2
6849.60	H	-	-	-70.51	11.37	-59.14	-46.1

Table 7-26. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1312)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 73 of 112

OPERATING FREQUENCY: 1732.60 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3465.20	H	-	-	-70.43	8.11	-62.32	-49.3
5197.80	H	-	-	-71.44	10.23	-61.21	-48.2
6930.40	H	-	-	-70.67	11.41	-59.26	-46.3


Table 7-27. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1413)

OPERATING FREQUENCY: 1752.60 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3505.20	H	-	-	-70.53	8.07	-62.47	-49.5
5257.80	H	-	-	-71.55	10.27	-61.28	-48.3
7010.40	H	-	-	-70.49	11.51	-58.98	-46.0

Table 7-28. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1513)

FCC ID: BCGA2230	 PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 74 of 112

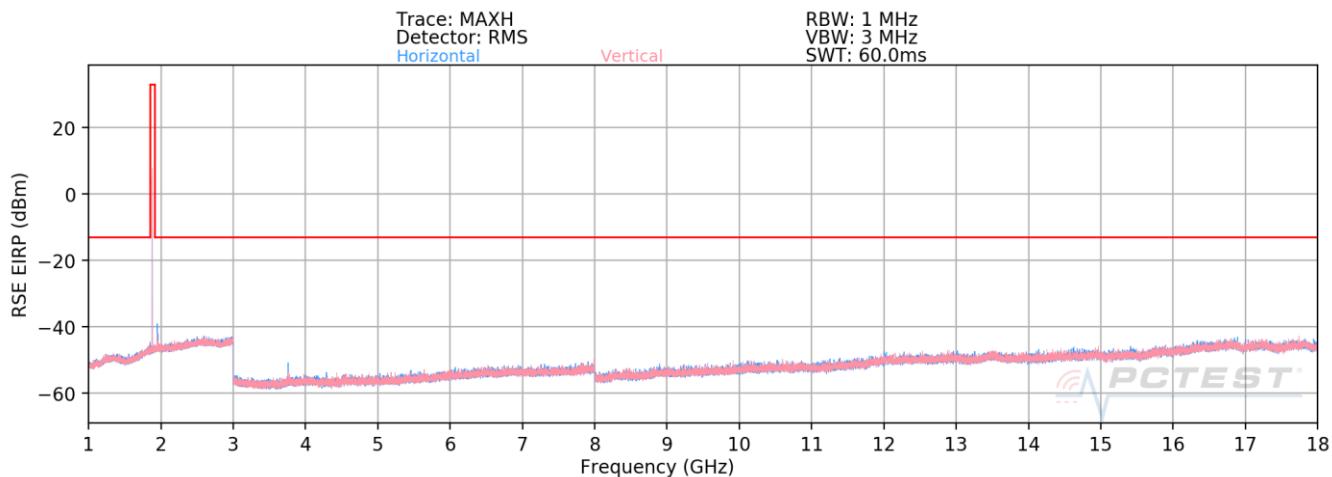**PCS GPRS Mode**

**Plot 7-80. Radiated Spurious Plot Above 1GHz (PCS GPRS Mode)**

OPERATING FREQUENCY: 1850.20 MHz  
 MODULATION SIGNAL: GPRS (GMSK)  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3700.40	H	144	201	-60.41	8.41	-52.01	-39.0
5550.60	V	109	296	-59.53	10.72	-48.80	-35.8
7400.80	V	-	-	-62.32	11.88	-50.44	-37.4
9251.00	V	-	-	-62.85	13.31	-49.55	-36.5
11101.20	V	-	-	-62.24	13.23	-49.01	-36.0

**Table 7-29. Radiated Spurious Data (PCS GPRS Mode – Ch. 512)**

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device		Page 75 of 112

OPERATING FREQUENCY: 1880.00 MHz  
 MODULATION SIGNAL: GPRS (GMSK)  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	V	249	71	-57.49	8.47	-49.02	-36.0
5640.00	V	273	172	-56.02	10.69	-45.33	-32.3
7520.00	V	107	342	-60.98	11.99	-48.99	-36.0
9400.00	V	-	-	-62.11	13.36	-48.75	-35.7
11280.00	V	-	-	-61.15	13.22	-47.92	-34.9
13160.00	V	-	-	-61.47	13.63	-47.84	-34.8

Table 7-30. Radiated Spurious Data (PCS GPRS Mode – Ch. 661)


OPERATING FREQUENCY: 1909.80 MHz  
 MODULATION SIGNAL: GPRS (GMSK)  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3819.60	V	386	74	-59.48	8.65	-50.83	-37.8
5729.40	V	-	-	-60.99	10.67	-50.32	-37.3
7639.20	V	140	341	-61.77	12.16	-49.60	-36.6
9549.00	V	-	-	-62.90	13.19	-49.71	-36.7

Table 7-31. Radiated Spurious Data (PCS GPRS Mode – Ch. 810)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 76 of 112

## PCS WCDMA Mode

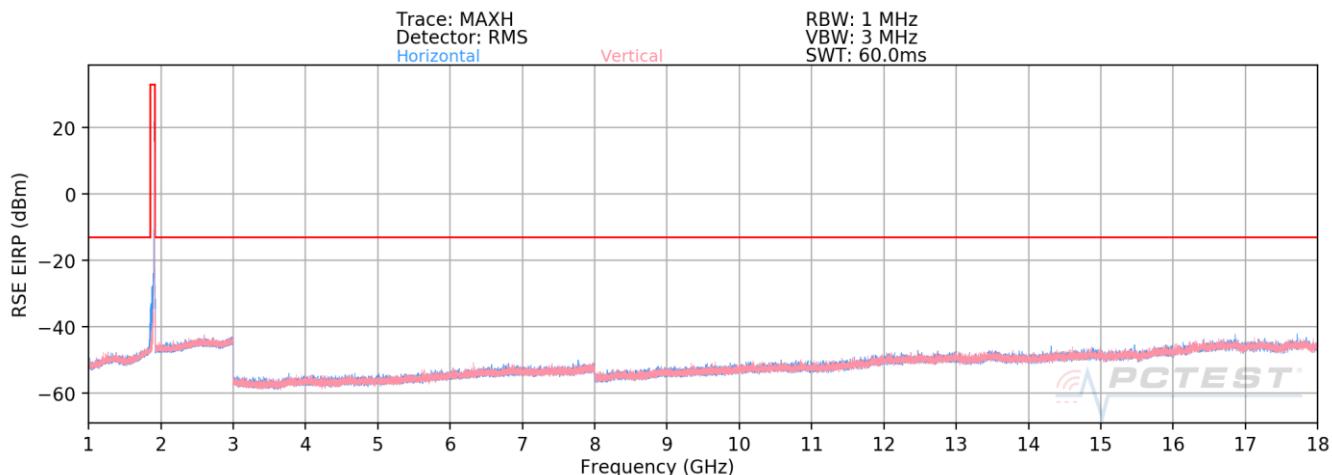

Plot 7-81. Radiated Spurious Plot Above 1GHz (PCS WCDMA Mode)

OPERATING FREQUENCY:	1852.40	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3704.80	H	-	-	-70.09	8.41	-61.67	-48.7
5557.20	H	-	-	-71.45	10.72	-60.73	-47.7
7409.60	H	-	-	-71.22	11.89	-59.33	-46.3

Table 7-32. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 77 of 112

OPERATING FREQUENCY:	1880.00	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	V	-	-	-70.29	8.47	-61.82	-48.8
5640.00	V	-	-	-71.20	10.69	-60.51	-47.5
7520.00	V	-	-	-71.35	11.99	-59.36	-46.4

Table 7-33. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)

OPERATING FREQUENCY:	1907.60	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3815.20	V	-	-	-70.29	8.62	-61.67	-48.7
5722.80	V	-	-	-71.35	10.66	-60.68	-47.7
7630.40	V	-	-	-70.74	12.16	-58.58	-45.6

Table 7-34. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 78 of 112

### 7.7.3 ANT 1 (Port B) Radiated Spurious Emissions Measurements

#### Cellular GPRS Mode

OPERATING FREQUENCY:	824.20	MHz
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1648.40	H	185	106	-62.50	5.38	-57.12	-44.1
2472.60	H	153	21	-58.99	5.91	-53.09	-40.1
3296.80	H	-	-	-61.16	7.82	-53.34	-40.3
4121.00	H	-	-	-61.56	8.97	-52.59	-39.6
4945.20	H	-	-	-62.34	10.05	-52.29	-39.3

Table 7-35. Radiated Spurious Data (Cellular GPRS Mode – Ch. 128)

OPERATING FREQUENCY:	836.60	MHz
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	H	244	105	-61.30	5.60	-55.70	-42.7
2509.80	H	245	20	-59.25	5.90	-53.35	-40.3
3346.40	H	-	-	-60.81	7.95	-52.87	-39.9
4183.00	H	-	-	-61.77	9.13	-52.64	-39.6
5019.60	H	-	-	-61.67	10.00	-51.67	-38.7

Table 7-36. Radiated Spurious Data (Cellular GPRS Mode – Ch. 190)

FCC ID: BCGA2230	 PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 79 of 112



OPERATING FREQUENCY: 848.80 MHz  
MODULATION SIGNAL: GPRS (GMSK)  
DISTANCE: 3 meters  
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1697.60	H	288	111	-63.04	5.62	-57.43	-44.4
2546.40	H	-	-	-60.53	6.02	-54.51	-41.5
3395.20	H	136	279	-57.64	8.09	-49.55	-36.5
4244.00	H	-	-	-62.06	9.20	-52.86	-39.9
5092.80	H	-	-	-62.65	10.09	-52.56	-39.6
5941.60	H	-	-	-61.96	10.67	-51.30	-38.3

Table 7-37. Radiated Spurious Data (Cellular GPRS Mode – Ch. 251)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 80 of 112

## Cellular WCDMA Mode

OPERATING FREQUENCY:	826.40	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1652.80	H	-	-	-73.64	5.43	-68.21	-55.2
2479.20	H	-	-	-70.03	5.93	-64.10	-51.1
3305.60	H	-	-	-70.64	7.84	-62.80	-49.8

Table 7-38. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4132)

OPERATING FREQUENCY:	836.60	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	H	-	-	-73.58	5.60	-67.98	-55.0
2509.80	H	-	-	-69.77	5.90	-63.87	-50.9
3346.40	H	-	-	-71.22	7.95	-63.28	-50.3

Table 7-39. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4183)

FCC ID: BCGA2230	 PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 81 of 112



OPERATING FREQUENCY: 846.60 MHz  
MODULATION SIGNAL: WCDMA  
DISTANCE: 3 meters  
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1693.20	H	-	-	-73.22	5.64	-67.58	-54.6
2539.80	H	-	-	-69.96	5.98	-63.98	-51.0
3386.40	H	-	-	-71.40	8.07	-63.33	-50.3

Table 7-40. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4233)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 82 of 112

#### 7.7.4 ANT 2b (Port B) Radiated Spurious Emissions Measurements

##### AWS WCDMA Mode

OPERATING FREQUENCY:	1712.40	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3424.80	H	-	-	-71.01	8.12	-62.90	-49.9
5137.20	H	-	-	-71.85	10.11	-61.74	-48.7
6849.60	H	-	-	-71.03	11.37	-59.66	-46.7

Table 7-41. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1312)

OPERATING FREQUENCY:	1732.60	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3465.20	H	-	-	-70.56	8.11	-62.45	-49.4
5197.80	H	-	-	-71.78	10.23	-61.55	-48.6
6930.40	H	-	-	-71.02	11.41	-59.61	-46.6

Table 7-42. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1413)

FCC ID: BCGA2230	 PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 83 of 112



OPERATING FREQUENCY: 1752.60 MHz  
MODULATION SIGNAL: WCDMA  
DISTANCE: 3 meters  
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3505.20	H	-	-	-70.58	8.07	-62.52	-49.5
5257.80	H	-	-	-71.79	10.27	-61.52	-48.5
7010.40	H	-	-	-71.12	11.51	-59.61	-46.6

Table 7-43. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1513)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 84 of 112

**PCS GPRS Mode**

OPERATING FREQUENCY:	1850.20		MHz
MODULATION SIGNAL:	GPRS (GMSK)		
DISTANCE:	3 meters		
LIMIT:	-13 dBm		

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3700.40	H	108	274	-55.85	8.41	-47.45	-34.4
5550.60	V	105	136	-61.15	10.72	-50.42	-37.4
7400.80	H	-	-	-62.22	11.88	-50.34	-37.3
9251.00	H	-	-	-63.72	13.31	-50.42	-37.4
11101.20	H	-	-	-61.77	13.23	-48.54	-35.5

**Table 7-44. Radiated Spurious Data (PCS GPRS Mode – Ch. 512)**

OPERATING FREQUENCY:	1880.00		MHz
MODULATION SIGNAL:	GPRS (GMSK)		
DISTANCE:	3 meters		
LIMIT:	-13 dBm		

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	107	280	-57.22	8.47	-48.75	-35.7
5640.00	H	314	198	-62.05	10.69	-51.36	-38.4
7520.00	H	271	180	-61.72	11.99	-49.73	-36.7
9400.00	H	-	-	-62.57	13.36	-49.21	-36.2
11280.00	H	-	-	-61.68	13.22	-48.45	-35.5
13160.00	H	-	-	-59.65	13.63	-46.02	-33.0

**Table 7-45. Radiated Spurious Data (PCS GPRS Mode – Ch. 661)**

FCC ID: BCGA2230	 <b>PCTEST</b>	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 85 of 112



OPERATING FREQUENCY: 1909.80 MHz  
MODULATION SIGNAL: GPRS (GMSK)  
DISTANCE: 3 meters  
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3819.60	H	154	83	-58.00	8.65	-49.35	-36.4
5729.40	H	126	140	-58.40	10.67	-47.73	-34.7
7639.20	H	106	347	-61.03	12.16	-48.86	-35.9
9549.00	H	-	-	-63.27	13.19	-50.08	-37.1
11458.80	H	-	-	-61.08	13.27	-47.81	-34.8
13368.60	H	-	-	-59.92	13.72	-46.20	-33.2

Table 7-46. Radiated Spurious Data (PCS GPRS Mode – Ch. 810)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 86 of 112



## PCS WCDMA Mode

OPERATING FREQUENCY:	1852.40	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3704.80	H	-	-	-70.37	8.41	-61.95	-49.0
5557.20	H	-	-	-71.83	10.72	-61.11	-48.1
7409.60	H	-	-	-71.59	11.89	-59.70	-46.7

Table 7-47. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)

OPERATING FREQUENCY:	1880.00	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	-	-	-70.46	8.47	-61.99	-49.0
5640.00	H	-	-	-71.41	10.69	-60.72	-47.7
7520.00	H	-	-	-71.56	11.99	-59.57	-46.6

Table 7-48. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 87 of 112

OPERATING FREQUENCY: 1907.60 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3815.20	H	-	-	-70.45	8.62	-61.83	-48.8
5722.80	H	-	-	-71.51	10.66	-60.84	-47.8
7630.40	H	-	-	-71.14	12.16	-58.98	-46.0

Table 7-49. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 88 of 112

## 7.7.5 ANT 4a (Port C) Radiated Spurious Emissions Measurements

### AWS WCDMA Mode

OPERATING FREQUENCY:	1712.40	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3424.80	H	-	-	-71.06	8.12	-62.95	-49.9
5137.20	H	-	-	-71.70	10.11	-61.59	-48.6
6849.60	H	-	-	-70.91	11.37	-59.54	-46.5

Table 7-50. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1312)

OPERATING FREQUENCY:	1732.60	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3465.20	H	-	-	-70.97	8.11	-62.86	-49.9
5197.80	H	-	-	-71.74	10.23	-61.51	-48.5
6930.40	H	-	-	-71.15	11.41	-59.74	-46.7

Table 7-51. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1413)

FCC ID: BCGA2230	 PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 89 of 112



OPERATING FREQUENCY: 1752.60 MHz  
MODULATION SIGNAL: WCDMA  
DISTANCE: 3 meters  
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3505.20	H	-	-	-70.78	8.07	-62.72	-49.7
5257.80	H	-	-	-71.84	10.27	-61.57	-48.6
7010.40	H	-	-	-71.14	11.51	-59.63	-46.6

Table 7-52. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1513)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 90 of 112



## PCS GPRS Mode

OPERATING FREQUENCY:	1850.20	MHz
MODULATION SIGNAL:	GSM (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3700.40	H	122	275	-58.55	8.41	-50.15	-37.1
5550.60	H	103	122	-61.03	10.72	-50.30	-37.3
7400.80	H	-	-	-62.92	11.88	-51.04	-38.0
9251.00	H	-	-	-64.18	13.31	-50.88	-37.9
11101.20	H	-	-	-62.68	13.23	-49.45	-36.4

Table 7-53. Radiated Spurious Data (PCS GSM Mode – Ch. 512)

OPERATING FREQUENCY:	1880.00	MHz
MODULATION SIGNAL:	GSM (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	124	277	-59.65	8.47	-51.18	-38.2
5640.00	H	139	137	-61.30	10.69	-50.61	-37.6
7520.00	H	-	-	-61.89	11.99	-49.90	-36.9
9400.00	H	-	-	-63.74	13.36	-50.38	-37.4
11280.00	H	-	-	-61.76	13.22	-48.53	-35.5

Table 7-54. Radiated Spurious Data (PCS GSM Mode – Ch. 661)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 91 of 112



OPERATING FREQUENCY: 1909.80 MHz  
MODULATION SIGNAL: GSM (GMSK)  
DISTANCE: 3 meters  
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3819.60	H	158	273	-57.71	8.65	-49.06	-36.1
5729.40	H	301	92	-61.56	10.67	-50.89	-37.9
7639.20	H	-	-	-61.67	12.16	-49.50	-36.5
9549.00	H	-	-	-63.31	13.19	-50.12	-37.1
11458.80	H	-	-	-61.42	13.27	-48.15	-35.1

Table 7-55. Radiated Spurious Data (PCS GPRS Mode – Ch. 810)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 92 of 112

## PCS WCDMA Mode

OPERATING FREQUENCY:	1852.40	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3704.80	H	-	-	-70.56	8.41	-62.14	-49.1
5557.20	H	-	-	-71.71	10.72	-60.99	-48.0
7409.60	H	-	-	-71.31	11.89	-59.42	-46.4

Table 7-56. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)

OPERATING FREQUENCY:	1880.00	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	-	-	-70.72	8.47	-62.25	-49.2
5640.00	H	-	-	-71.73	10.69	-61.04	-48.0
7520.00	H	-	-	-71.04	11.99	-59.05	-46.1

Table 7-57. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)

FCC ID: BCGA2230	 PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 93 of 112

OPERATING FREQUENCY: 1907.60 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3815.20	H	-	-	-70.51	8.62	-61.89	-48.9
5722.80	H	-	-	-71.41	10.66	-60.74	-47.7
7630.40	H	-	-	-71.35	12.16	-59.19	-46.2

Table 7-58. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 94 of 112	

## 7.7.6 ANT 2a (Port D) Radiated Spurious Emissions Measurements

### AWS WCDMA Mode

OPERATING FREQUENCY:	1712.40	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3424.80	H	-	-	-71.02	8.12	-62.91	-49.9
5137.20	H	-	-	-71.66	10.11	-61.55	-48.5
6849.60	H	-	-	-71.03	11.37	-59.66	-46.7

Table 7-59. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1312)

OPERATING FREQUENCY:	1732.60	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3465.20	H	-	-	-70.81	8.11	-62.70	-49.7
5197.80	H	-	-	-71.84	10.23	-61.61	-48.6
6930.40	H	-	-	-70.91	11.41	-59.50	-46.5

Table 7-60. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1413)

FCC ID: BCGA2230	 PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 95 of 112

OPERATING FREQUENCY: 1752.60 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3505.20	H	-	-	-70.78	8.07	-62.72	-49.7
5257.80	H	-	-	-71.84	10.27	-61.57	-48.6
7010.40	H	-	-	-71.14	11.51	-59.63	-46.6

Table 7-61. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1513)

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 96 of 112	



## PCS GPRS Mode

OPERATING FREQUENCY:	1850.20	MHz
MODULATION SIGNAL:	GSM (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3700.40	H	145	279	-55.95	8.41	-47.55	-34.5
5550.60	H	11	303	-61.71	10.72	-50.98	-38.0
7400.80	H	-	-	-60.57	11.88	-48.69	-35.7
9251.00	H	-	-	-63.73	13.31	-50.43	-37.4
11101.20	H	-	-	-61.92	13.23	-48.69	-35.7

Table 7-62. Radiated Spurious Data (PCS GSM Mode – Ch. 512)

OPERATING FREQUENCY:	1880.00	MHz
MODULATION SIGNAL:	GSM (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	119	278	-56.87	8.47	-48.40	-35.4
5640.00	H	-	-	-61.69	10.69	-51.00	-38.0
7520.00	H	-	-	-62.12	11.99	-50.13	-37.1
9400.00	H	-	-	-62.80	13.36	-49.44	-36.4

Table 7-63. Radiated Spurious Data (PCS GSM Mode – Ch. 661)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 97 of 112

OPERATING FREQUENCY: 1909.80 MHz  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3819.60	H	159	271	-56.87	8.65	-48.22	-35.2
5729.40	H	-	-	-61.77	10.67	-51.10	-38.1
7639.20	H	-	-	-62.68	12.16	-50.51	-37.5
9549.00	H	-	-	-63.15	13.19	-49.96	-37.0

Table 7-64. Radiated Spurious Data (PCS GPRS Mode – Ch. 810)

FCC ID: BCGA2230	 PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 98 of 112



## PCS WCDMA Mode

OPERATING FREQUENCY:	1852.40	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3704.80	H	-	-	-70.52	8.41	-62.10	-49.1
5557.20	H	-	-	-71.67	10.72	-60.95	-47.9
7409.60	H	-	-	-71.43	11.89	-59.54	-46.5

Table 7-65. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)

OPERATING FREQUENCY:	1880.00	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	-	-	-70.56	8.47	-62.09	-49.1
5640.00	H	-	-	-71.83	10.69	-61.14	-48.1
7520.00	H	-	-	-70.80	11.99	-58.81	-45.8

Table 7-66. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 99 of 112

OPERATING FREQUENCY: 1907.60 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3815.20	H	-	-	-70.51	8.62	-61.89	-48.9
5722.80	H	-	-	-71.41	10.66	-60.74	-47.7
7630.40	H	-	-	-71.35	12.16	-59.19	-46.2

Table 7-67. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 100 of 112	

## 7.8 Frequency Stability / Temperature Variation

### Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

**For Part 22, RSS-132, and RSS-133, the frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5 \text{ ppm}$ ) of the center frequency. For Part 24, Part 27, and RSS-139, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.**

### Test Procedure Used

ANSI/TIA-603-E-2016

### Test Settings

- The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### Test Setup



Figure 7-8. Test Instrument & Measurement Setup

### Test Notes

All ports were tested and only the worst case data were reported.

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 101 of 112

## Frequency Stability / Temperature Variation


OPERATING FREQUENCY:	836,600,000	Hz
CHANNEL:	190	
REFERENCE VOLTAGE:	3.80	VDC
DEVIATION LIMIT:	± 0.00025 % or 2.5 ppm	

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	836,600,005	5	0.0000006
100 %		- 20	836,600,004	4	0.0000005
100 %		- 10	836,600,004	4	0.0000005
100 %		0	836,600,004	4	0.0000005
100 %		+ 10	836,600,005	5	0.0000006
100 %		+ 20	836,600,005	5	0.0000006
100 %		+ 30	836,600,006	6	0.0000007
100 %		+ 40	836,600,004	4	0.0000005
100 %		+ 50	836,600,004	4	0.0000005
BATT. ENDPOINT	3.20	+ 20	836,600,006	6	0.0000007

Table 7-68. Frequency Stability Data (Cellular GPRS Mode – Ch. 190)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 102 of 112

## Frequency Stability / Temperature Variation

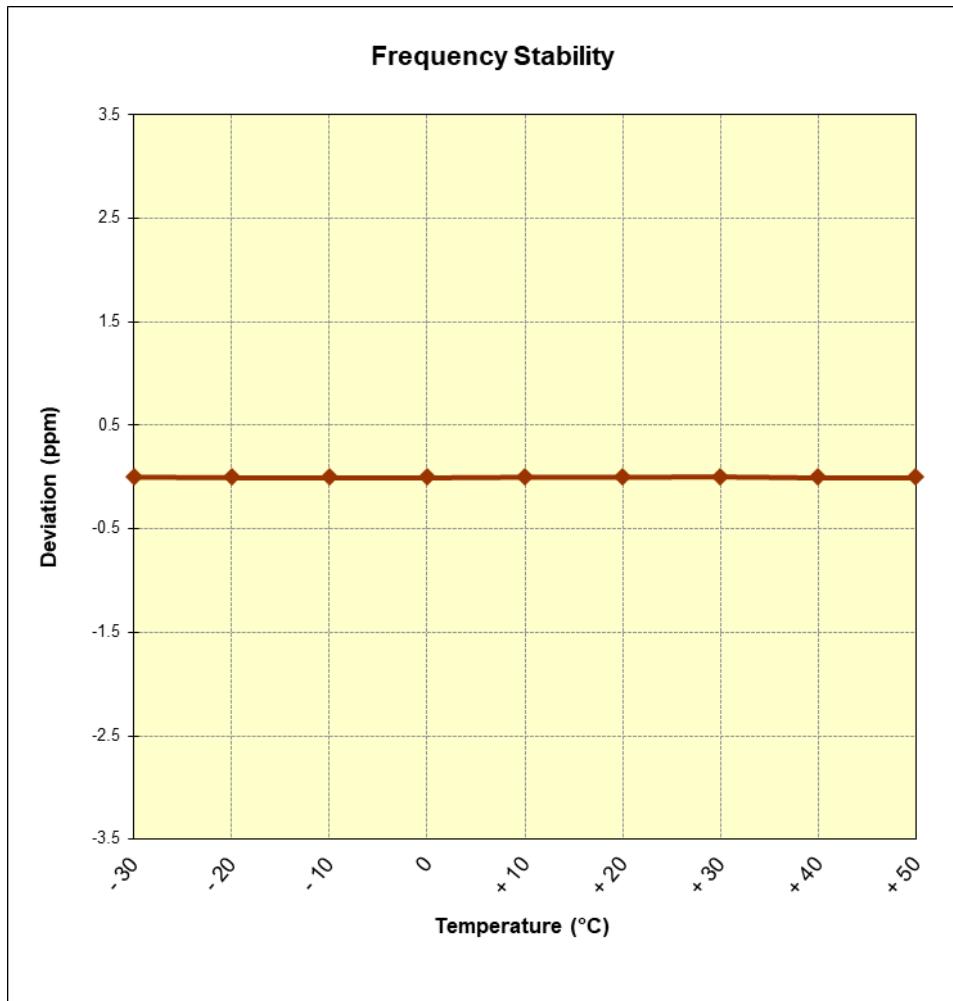

**Figure 7-9. Frequency Stability Graph (Cellular GPRS Mode – Ch. 190)**

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 103 of 112



## Frequency Stability / Temperature Variation

OPERATING FREQUENCY:	836,600,000	Hz
CHANNEL:	4183	
REFERENCE VOLTAGE:	3.80	VDC
DEVIATION LIMIT:	± 0.00025 % or 2.5 ppm	

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	836,600,005	5	0.0000006
100 %		- 20	836,600,004	4	0.0000005
100 %		- 10	836,600,004	4	0.0000005
100 %		0	836,600,004	4	0.0000005
100 %		+ 10	836,600,005	5	0.0000006
100 %		+ 20	836,600,005	5	0.0000006
100 %		+ 30	836,600,006	6	0.0000007
100 %		+ 40	836,600,004	4	0.0000005
100 %		+ 50	836,600,004	4	0.0000005
BATT. ENDPOINT		+ 20	836,600,006	6	0.0000007

Table 7-69. Frequency Stability Data (Cellular WCDMA Mode – Ch. 4183)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 104 of 112

## Frequency Stability / Temperature Variation

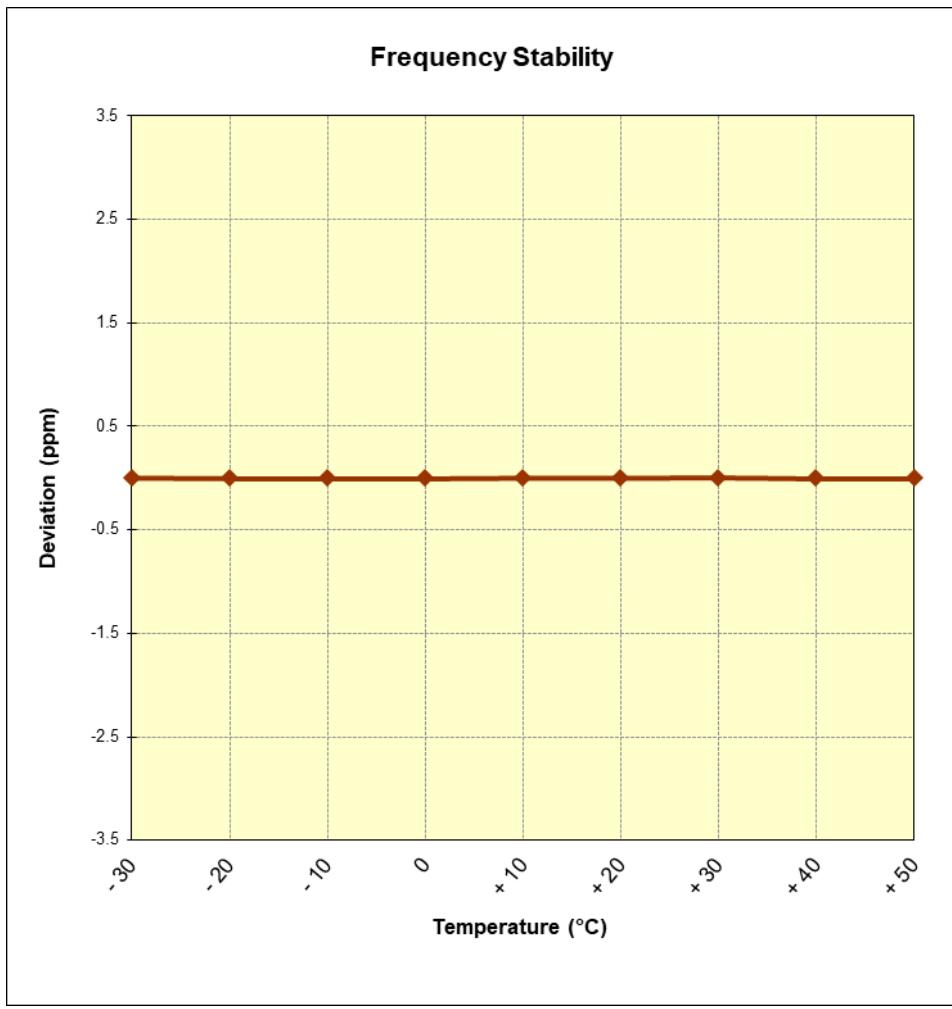


Figure 7-10. Frequency Stability Graph (Cellular WCDMA Mode – Ch. 4183)

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 105 of 112

## Frequency Stability / Temperature Variation

OPERATING FREQUENCY:	1,732,600,000	Hz
CHANNEL:	1413	
REFERENCE VOLTAGE:	3.80	VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	1,732,600,008	8	0.0000004
100 %		- 20	1,732,600,007	7	0.0000004
100 %		- 10	1,732,600,007	7	0.0000004
100 %		0	1,732,600,008	8	0.0000005
100 %		+ 10	1,732,600,008	8	0.0000005
100 %		+ 20	1,732,600,006	6	0.0000004
100 %		+ 30	1,732,600,006	6	0.0000004
100 %		+ 40	1,732,600,008	8	0.0000005
100 %		+ 50	1,732,600,009	9	0.0000005
BATT. ENDPOINT		+ 20	1,732,600,003	3	0.0000002

Table 7-70. Frequency Stability Data (AWS WCDMA Mode – Ch. 1413)

**Note:**

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 106 of 112

## Frequency Stability / Temperature Variation

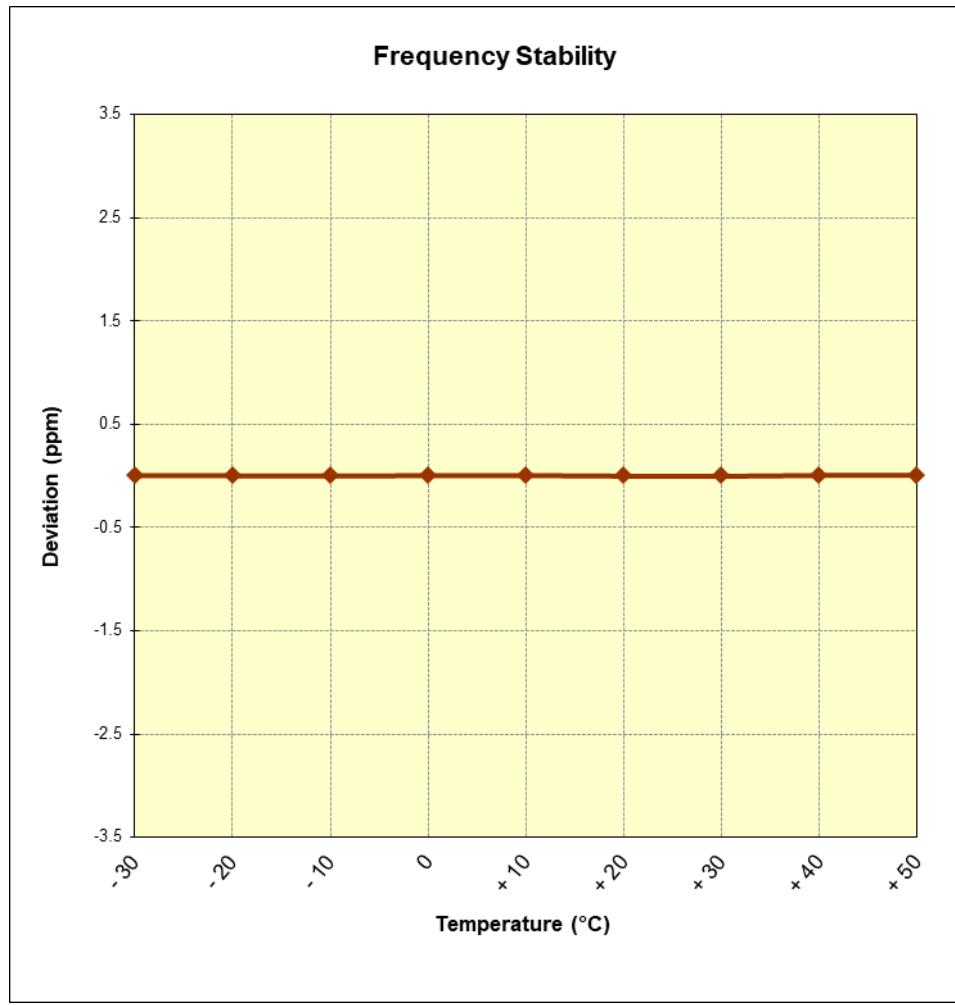


Figure 7-11. Frequency Stability Graph (AWS WCDMA Mode – Ch. 1413)

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 107 of 112



## Frequency Stability / Temperature Variation

OPERATING FREQUENCY: 1,880,000,000 Hz  
 CHANNEL: 661  
 REFERENCE VOLTAGE: 3.80 VDC  
 DEVIATION LIMIT:  $\pm 0.00025\%$  or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	1,880,000,008	8	0.0000004
100 %		- 20	1,880,000,009	9	0.0000005
100 %		- 10	1,880,000,008	8	0.0000004
100 %		0	1,880,000,008	8	0.0000004
100 %		+ 10	1,880,000,007	7	0.0000004
100 %		+ 20	1,880,000,007	7	0.0000004
100 %		+ 30	1,880,000,007	7	0.0000003
100 %		+ 40	1,880,000,007	7	0.0000004
100 %		+ 50	1,880,000,008	8	0.0000004
BATT. ENDPOINT	3.20	+ 20	1,880,000,005	5	0.0000003

Table 7-71. Frequency Stability Data (PCS GPRS Mode – Ch. 661)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 108 of 112

## Frequency Stability / Temperature Variation

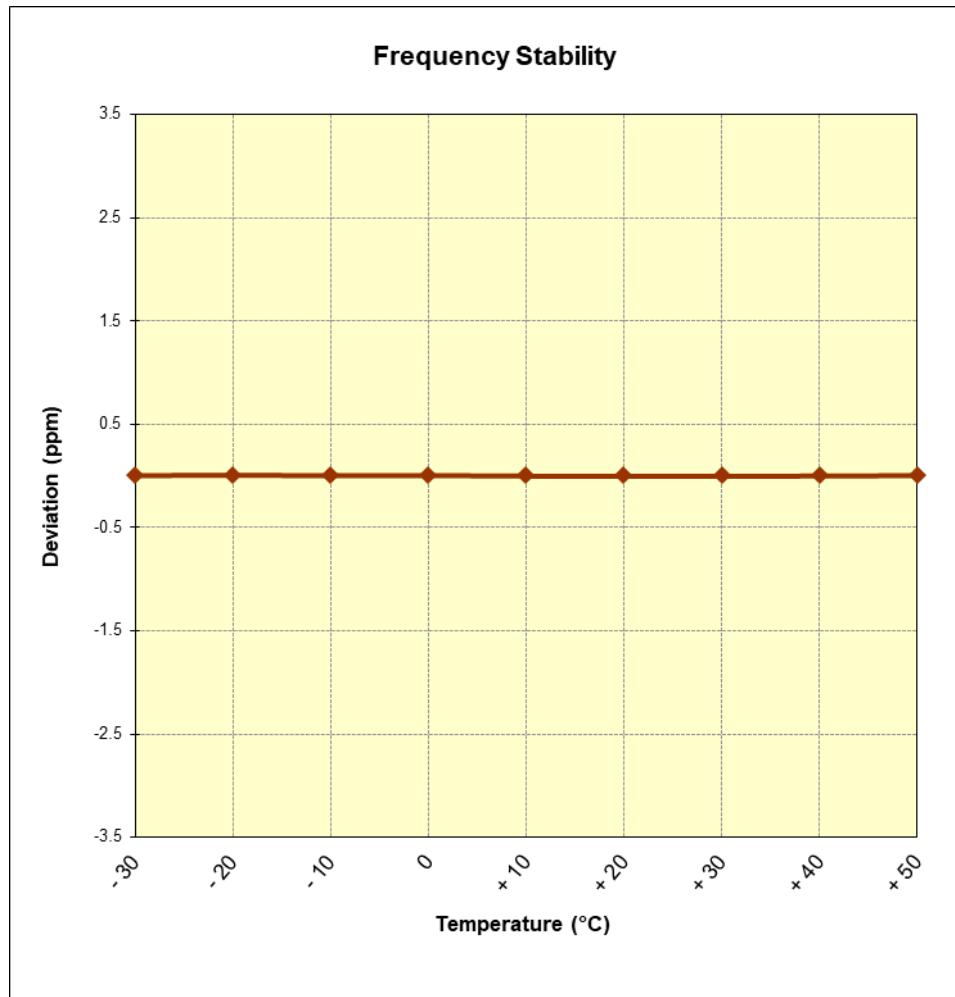


Figure 7-12. Frequency Stability Graph (PCS GPRS Mode – Ch. 661)

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 109 of 112

## Frequency Stability / Temperature Variation

OPERATING FREQUENCY:	1,880,000,000	Hz
CHANNEL:	9400	
REFERENCE VOLTAGE:	3.80	VDC
DEVIATION LIMIT:	± 0.00025 % or 2.5 ppm	

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	1,880,000,008	8	0.0000004
100 %		- 20	1,880,000,009	9	0.0000005
100 %		- 10	1,880,000,008	8	0.0000004
100 %		0	1,880,000,008	8	0.0000004
100 %		+ 10	1,880,000,007	7	0.0000004
100 %		+ 20	1,880,000,007	7	0.0000004
100 %		+ 30	1,880,000,007	7	0.0000003
100 %		+ 40	1,880,000,007	7	0.0000004
100 %		+ 50	1,880,000,008	8	0.0000004
BATT. ENDPOINT	3.20	+ 20	1,880,000,005	5	0.0000003

Table 7-72. Frequency Stability Data (PCS WCDMA Mode – Ch. 9400)

FCC ID: BCGA2230		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 110 of 112

## Frequency Stability / Temperature Variation

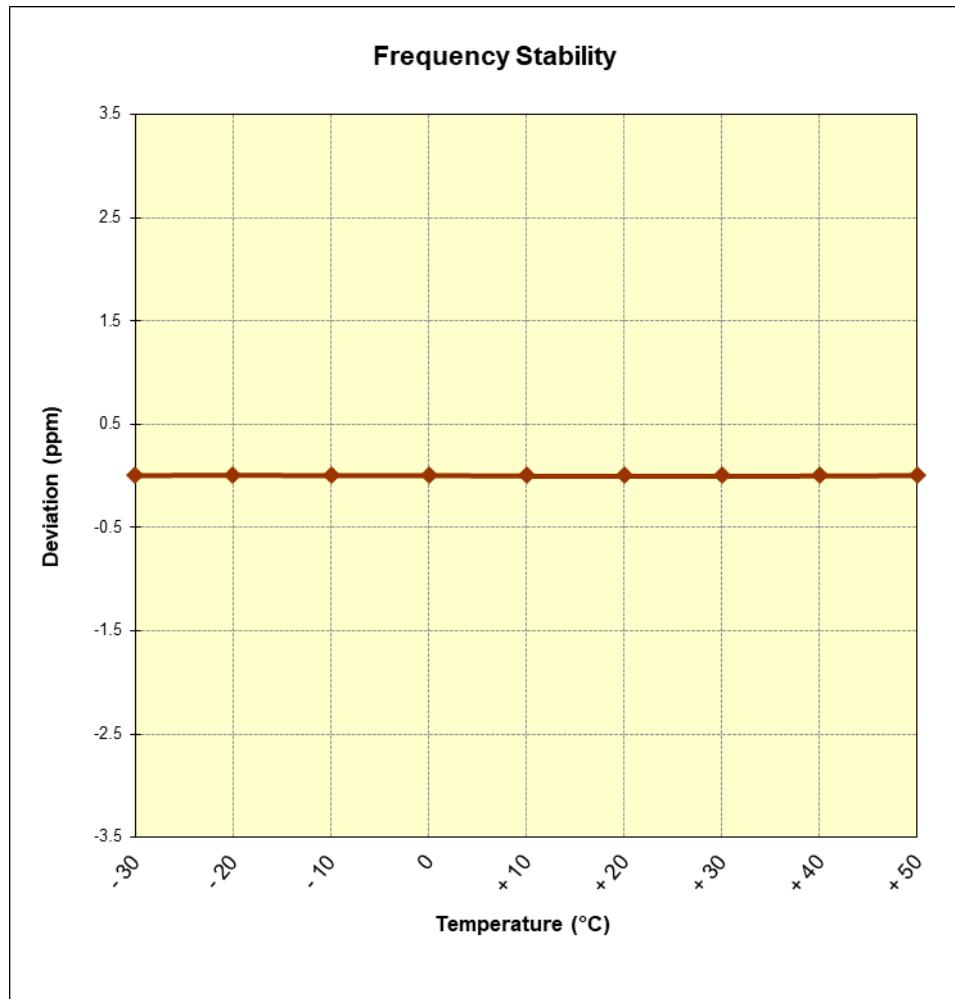


Figure 7-13. Frequency Stability Graph (PCS WCDMA Mode – Ch. 9400)

FCC ID: BCGA2230	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 111 of 112

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Apple Tablet Device** **FCC ID: BCGA2230** complies with all the requirements of Part 22, 24, & 27 of the FCC Rules and RSS-132, RSS-133, RSS-139 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA2230	 <b>PCTEST</b> MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170052-02.BCG	Test Dates: 12/10/2019 - 02/26/2020	EUT Type: Tablet Device	Page 112 of 112