



Plot 7-89. Conducted Spurious Plot SISO CORE 1 (802.11b – Ch. 6)

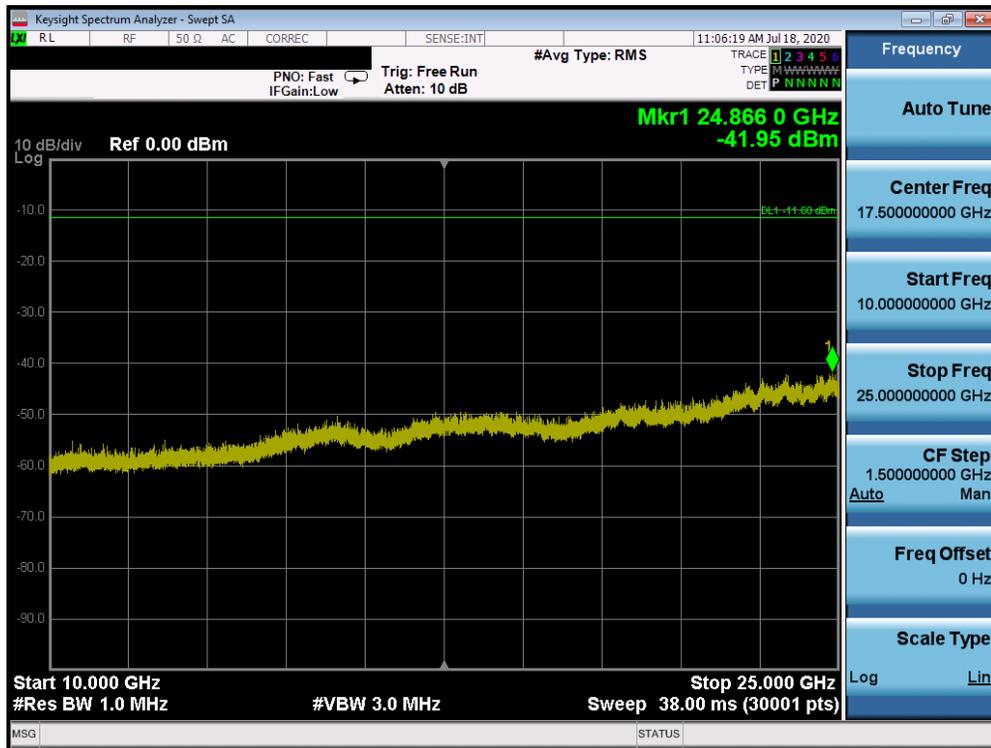


Plot 7-90. Conducted Spurious Plot SISO CORE 1 (802.11b – Ch. 6)

FCC ID: BCGA2270	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 75 of 111

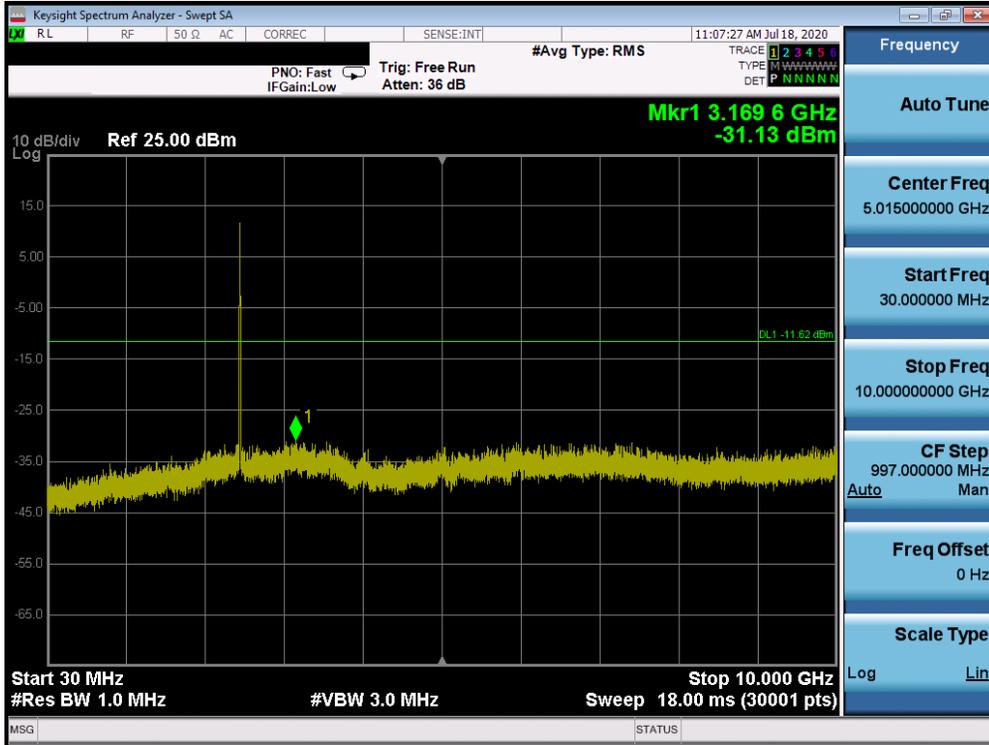

**Plot 7-91. Conducted Spurious Plot SISO CORE 1 (802.11b – Ch. 11)**

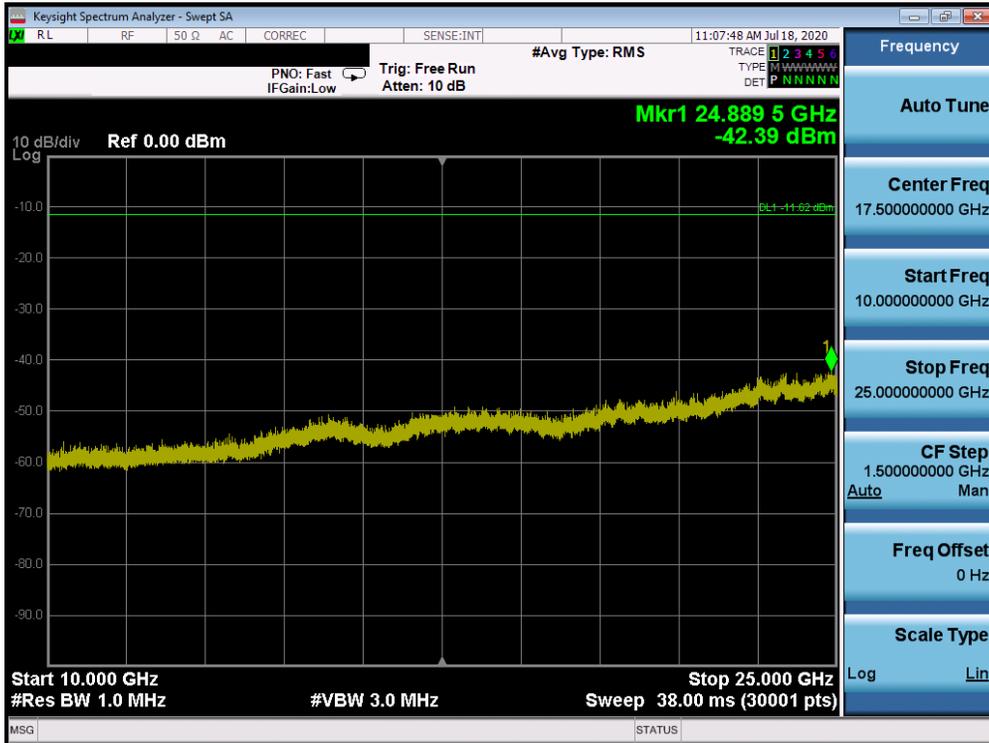

**Plot 7-92. Conducted Spurious Plot SISO CORE 1 (802.11b – Ch. 11)**

FCC ID: BCGA2270	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 76 of 111

## 7.7 Radiated Spurious Emission – Above 1 GHz

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-15 per Section 15.209 and RSS-Gen (8.9).***

Frequency	Field Strength [ $\mu\text{V/m}$ ]	Measured Distance [Meters]
Above 960.0 MHz	500	3

**Table 7-15. Radiated Limits**

### Test Procedures Used

ANSI C63.10-2013 – Section 6.6.4.3  
KDB 558074 D01 v05r02 – Sections 8.6, 8.7

### Test Settings

#### Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be  $\geq 2 \times \text{span/RBW}$ )
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces


#### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA2270		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 77 of 111

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

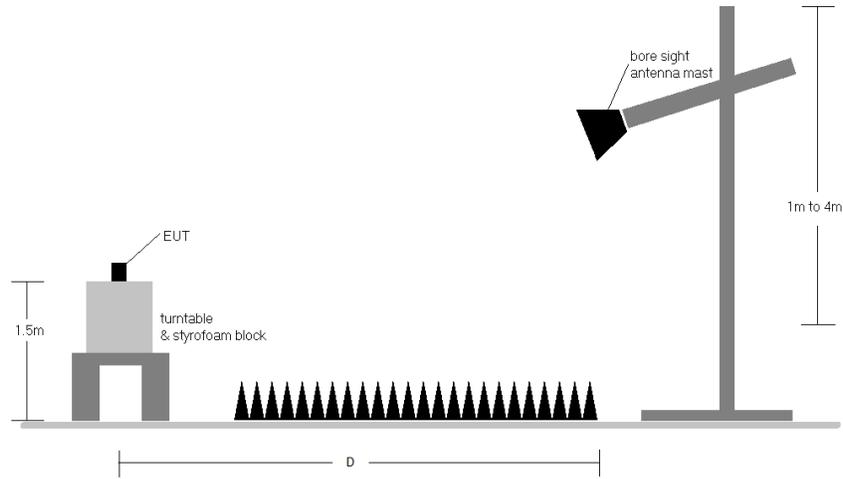

**Figure 7-6. Radiated Measurement Setup**

**Test Notes**

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 558074 D01 v05r02 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in Section 15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-15.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
9. All antenna configs were investigated and only the worst case is reported.

FCC ID: BCGA2270		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 78 of 111

## Sample Calculations

### Determining Spurious Emissions Levels

- Field Strength Level  $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]} - \text{Preamplifier Gain }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$


### Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.7 was calculated using the formula:  
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain


FCC ID: BCGA2270		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 79 of 111

### 7.7.1 SISO Core 0 - Radiated Spurious Emission Measurements


§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

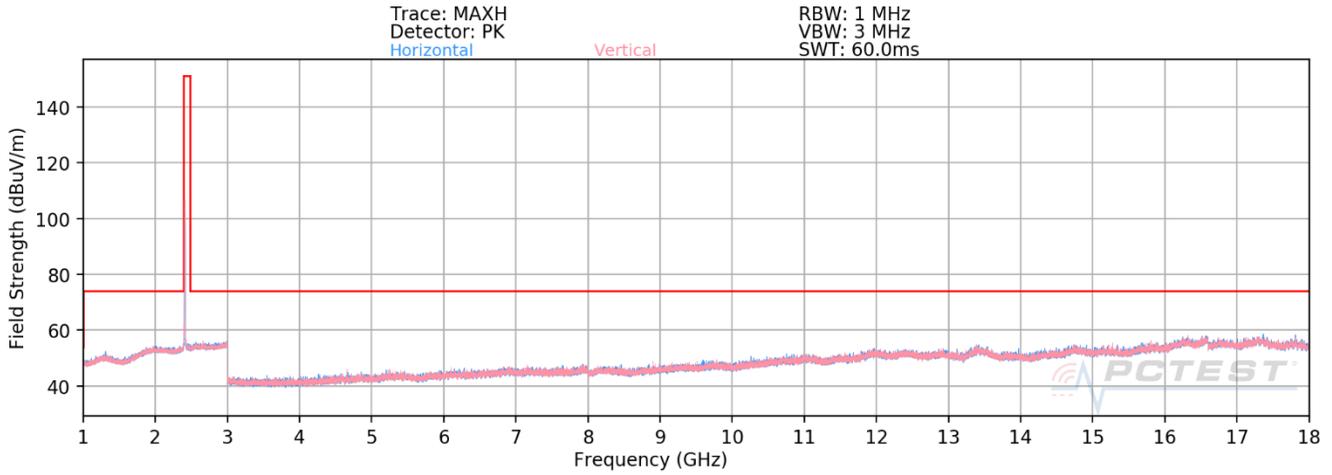

**Plot 7-93. Radiated Spurious Emissions above 1GHz SISO CORE 0 (802.11b – Ch. 1)**

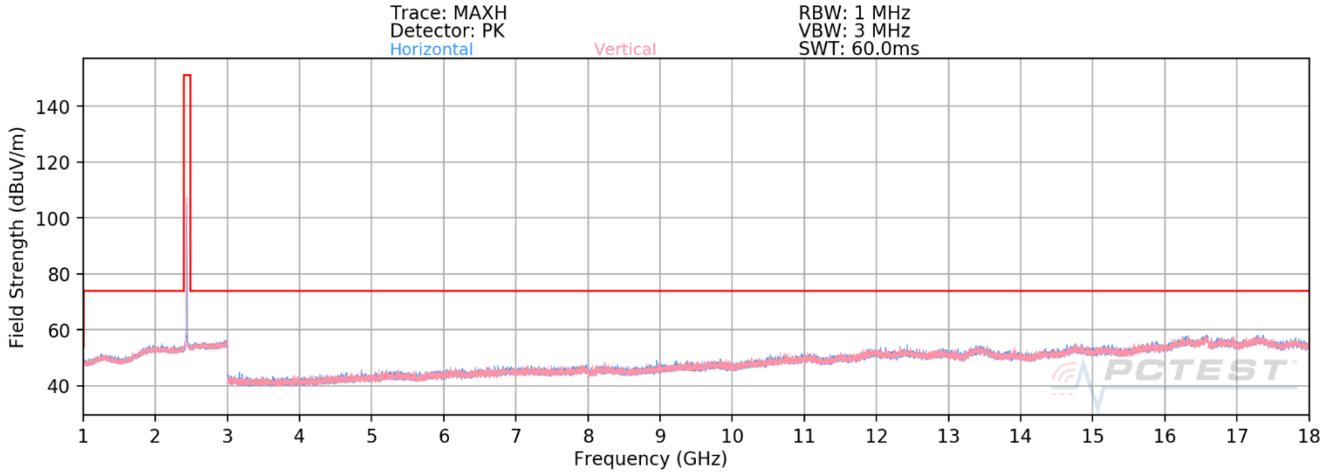

**Plot 7-94. Radiated Spurious Emissions above 1GHz SISO CORE 0 (802.11b – Ch. 6)**

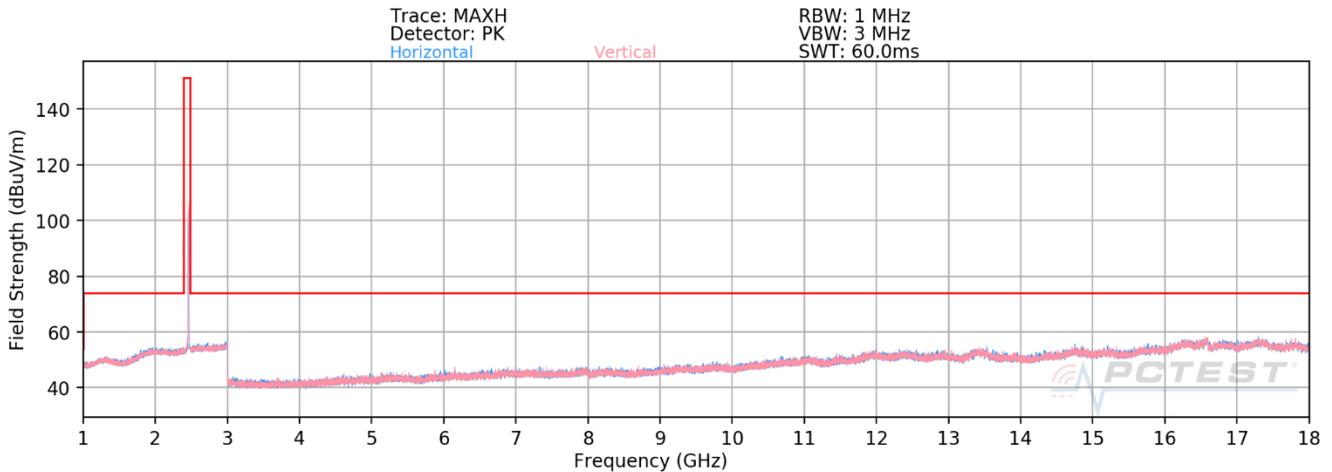

**Plot 7-95. Radiated Spurious Emissions above 1GHz SISO CORE 0 (802.11b – Ch. 11)**

FCC ID: BCGA2270		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 80 of 111

## SISO Core 0 - Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4824.00	Avg	V	-	-	-80.22	5.83	32.61	53.98	-21.37
4824.00	Peak	V	-	-	-68.08	5.83	44.75	73.98	-29.23
12060.00	Avg	V	-	-	-83.08	14.69	38.61	53.98	-15.36
12060.00	Peak	V	-	-	-70.54	14.69	51.15	73.98	-22.82

Table 7-16. Radiated Measurements SISO CORE 0

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4874.00	Avg	V	-	-	-79.95	5.82	32.87	53.98	-21.11
4874.00	Peak	V	-	-	-68.97	5.82	43.85	73.98	-30.13
7311.00	Avg	V	-	-	-81.42	9.32	34.90	53.98	-19.08
7311.00	Peak	V	-	-	-70.11	9.32	46.21	73.98	-27.77
12185.00	Avg	V	-	-	-83.31	14.82	38.51	53.98	-15.47
12185.00	Peak	V	-	-	-71.50	14.82	50.32	73.98	-23.66

Table 7-17. Radiated Measurements SISO CORE 0

FCC ID: BCGA2270		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 81 of 111

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	V	-	-	-80.18	6.28	33.10	53.98	-20.88
4924.00	Peak	V	-	-	-68.30	6.28	44.98	73.98	-29.00
7386.00	Avg	V	-	-	-81.77	9.43	34.66	53.98	-19.32
7386.00	Peak	V	-	-	-70.32	9.43	46.11	73.98	-27.87
12310.00	Avg	V	-	-	-83.31	14.80	38.49	53.98	-15.49
12310.00	Peak	V	-	-	-72.09	14.80	49.71	73.98	-24.27

**Table 7-18. Radiated Measurements SISO CORE 0**


FCC ID: BCGA2270		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 82 of 111

## 7.7.2 SISO Core 1 - Radiated Spurious Emission Measurements


§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

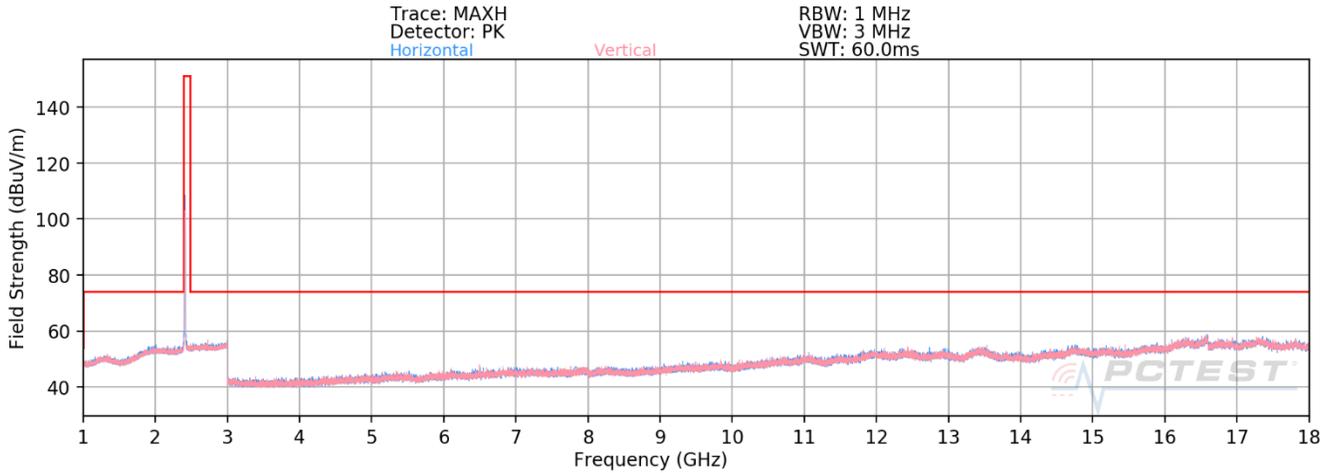

**Plot 7-96. Radiated Spurious Emissions above 1GHz SISO CORE 1 (802.11b – Ch. 1)**

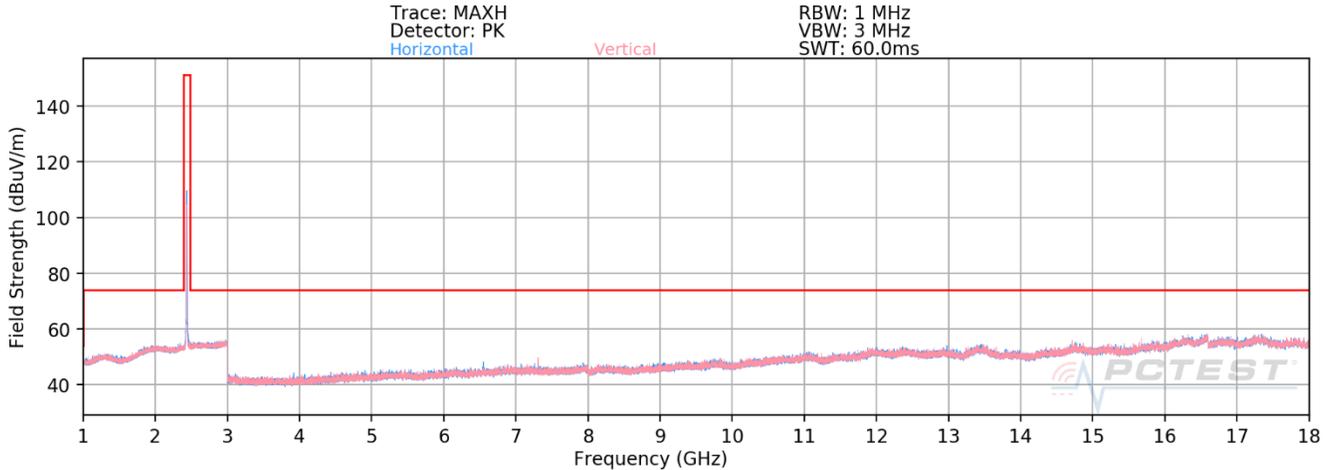

**Plot 7-97. Radiated Spurious Emissions above 1GHz SISO CORE 1 (802.11b – Ch. 6)**

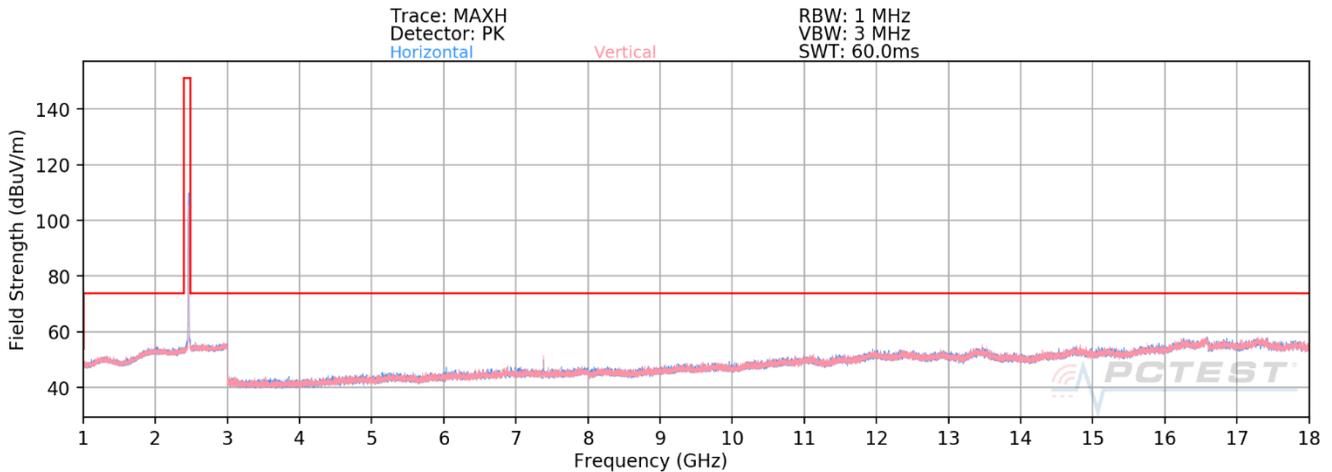

**Plot 7-98. Radiated Spurious Emissions above 1GHz SISO CORE 1 (802.11b – Ch. 11)**

FCC ID: BCGA2270	 PCTEST® Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 83 of 111

## SISO Core 1 - Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4824.00	Avg	H	183	144	-79.22	5.83	33.61	53.98	-20.37
4824.00	Peak	H	183	144	-68.95	5.83	43.88	73.98	-30.10
12060.00	Avg	H	-	-	-82.98	14.69	38.71	53.98	-15.26
12060.00	Peak	H	-	-	-71.94	14.69	49.75	73.98	-24.22

Table 7-19. Radiated Measurements SISO CORE 1

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4874.00	Avg	H	123	77	-79.11	5.82	33.71	53.98	-20.27
4874.00	Peak	H	123	77	-69.00	5.82	43.82	73.98	-30.16
7311.00	Avg	V	212	92	-71.78	9.32	44.54	53.98	-9.44
7311.00	Peak	V	212	92	-64.73	9.32	51.59	73.98	-22.39
12185.00	Avg	H	-	-	-83.26	14.82	38.56	53.98	-15.42
12185.00	Peak	H	-	-	-72.05	14.82	49.77	73.98	-24.21

Table 7-20. Radiated Measurements SISO CORE 1

FCC ID: BCGA2270		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 84 of 111

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	128	147	-78.07	6.28	35.21	53.98	-18.77
4924.00	Peak	H	128	147	-68.59	6.28	44.69	73.98	-29.29
7386.00	Avg	V	126	98	-69.23	9.43	47.20	53.98	-6.78
7386.00	Peak	V	126	98	-63.02	9.43	53.41	73.98	-20.57
12310.00	Avg	V	-	-	-83.44	14.80	38.36	53.98	-15.62
12310.00	Peak	V	-	-	-72.07	14.80	49.73	73.98	-24.25

**Table 7-21. Radiated Measurements SISO CORE 1**


FCC ID: BCGA2270		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device		Page 85 of 111

### 7.7.3 CDD Radiated Spurious Emission Measurements


§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

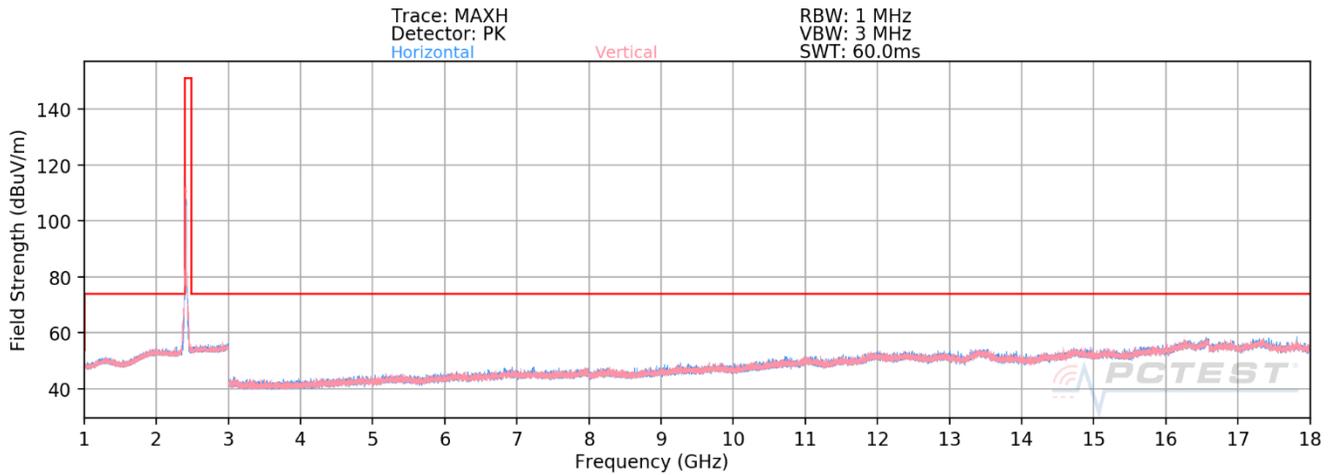

**Plot 7-99. Radiated Spurious Emissions above 1GHz CDD (802.11n – Ch. 1)**

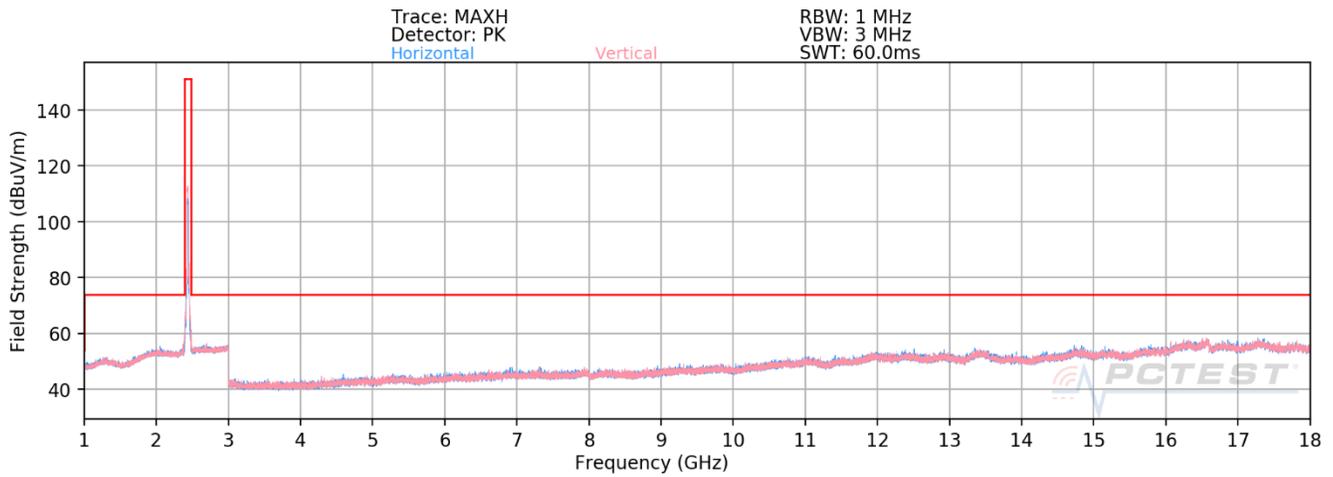

**Plot 7-100. Radiated Spurious Emissions above 1GHz CDD (802.11n – Ch. 6)**

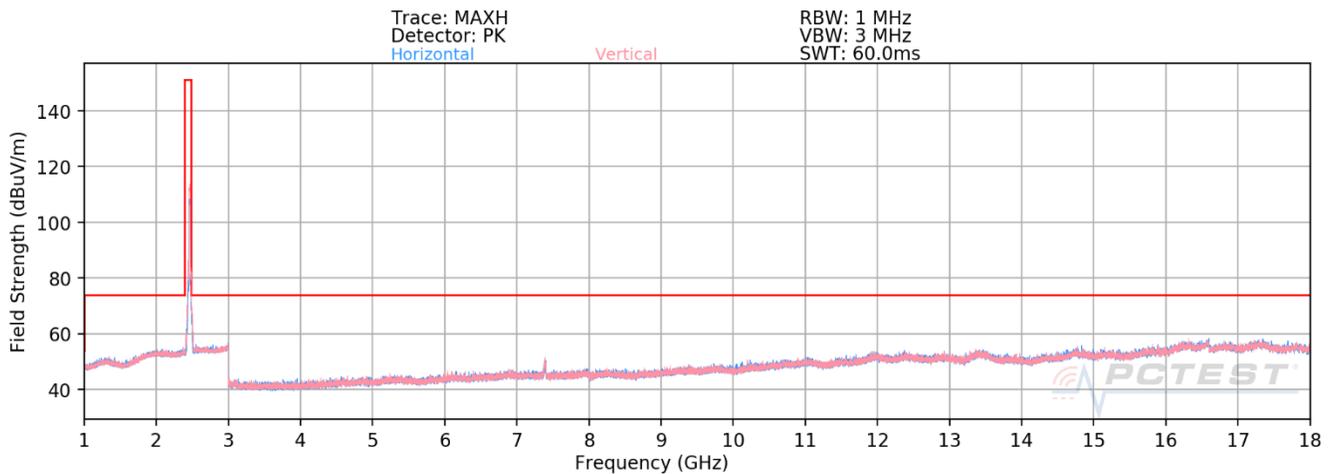

**Plot 7-101. Radiated Spurious Emissions above 1GHz CDD (802.11n – Ch. 11)**

FCC ID: BCGA2270		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 86 of 111

## CDD Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4824.00	Avg	V	-	-	-80.21	5.83	32.62	53.98	-21.36
4824.00	Peak	V	-	-	-67.80	5.83	45.03	73.98	-28.95
12060.00	Avg	V	-	-	-82.62	14.69	39.07	53.98	-14.90
12060.00	Peak	V	-	-	-71.94	14.69	49.75	73.98	-24.22

Table 7-22. Radiated Measurements CDD

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4874.00	Avg	V	-	-	-79.58	5.82	33.24	53.98	-20.74
4874.00	Peak	V	-	-	-68.53	5.82	44.29	73.98	-29.69
7311.00	Avg	V	306	113	-76.98	9.32	39.34	53.98	-14.64
7311.00	Peak	V	306	113	-64.58	9.32	51.74	73.98	-22.24
12185.00	Avg	V	-	-	-83.29	14.82	38.53	53.98	-15.45
12185.00	Peak	V	-	-	-72.10	14.82	49.72	73.98	-24.26

Table 7-23. Radiated Measurements CDD

FCC ID: BCGA2270		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 87 of 111


Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4924.00	Avg	V	-	-	-80.46	6.28	32.82	53.98	-21.16
4924.00	Peak	V	-	-	-69.26	6.28	44.02	73.98	-29.96
7386.00	Avg	V	105	122	-77.55	9.43	38.89	53.98	-15.09
7386.00	Peak	V	105	122	-62.03	9.43	54.40	73.98	-19.58
12310.00	Avg	V	-	-	-83.46	14.80	38.34	53.98	-15.64
12310.00	Peak	V	-	-	-73.02	14.80	48.78	73.98	-25.20

Table 7-24. Radiated Measurements CDD


FCC ID: BCGA2270		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 88 of 111

## CDD Radiated Spurious Emissions Measurements (Above 18GHz) §15.209; RSS-Gen [8.9]

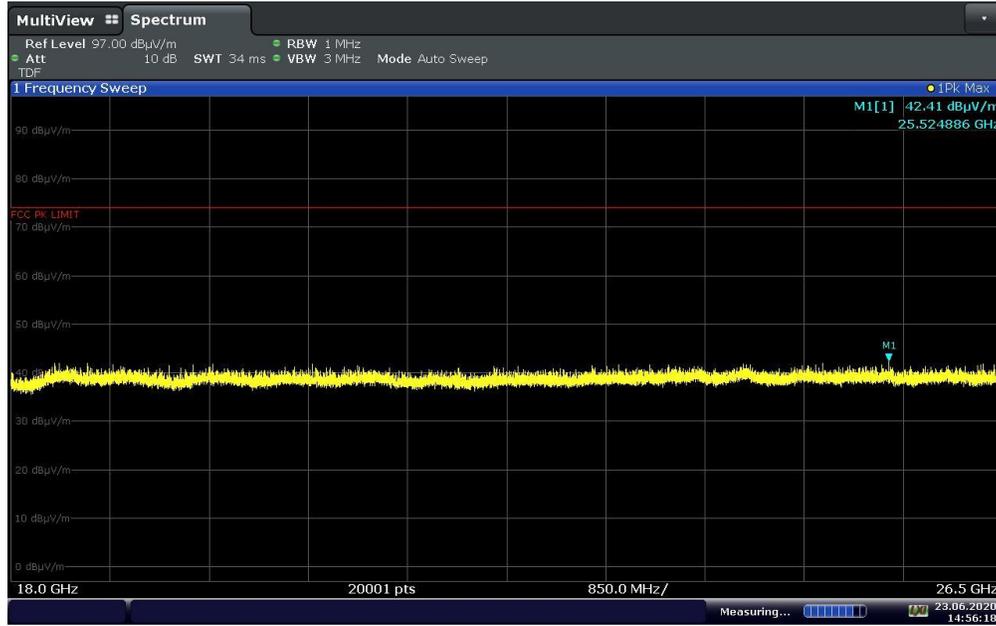

14:56:18 23.06.2020

Plot 7-102. Radiated Spurious Emissions above 18GHz CDD (802.11n – Ch.11, Pol H)

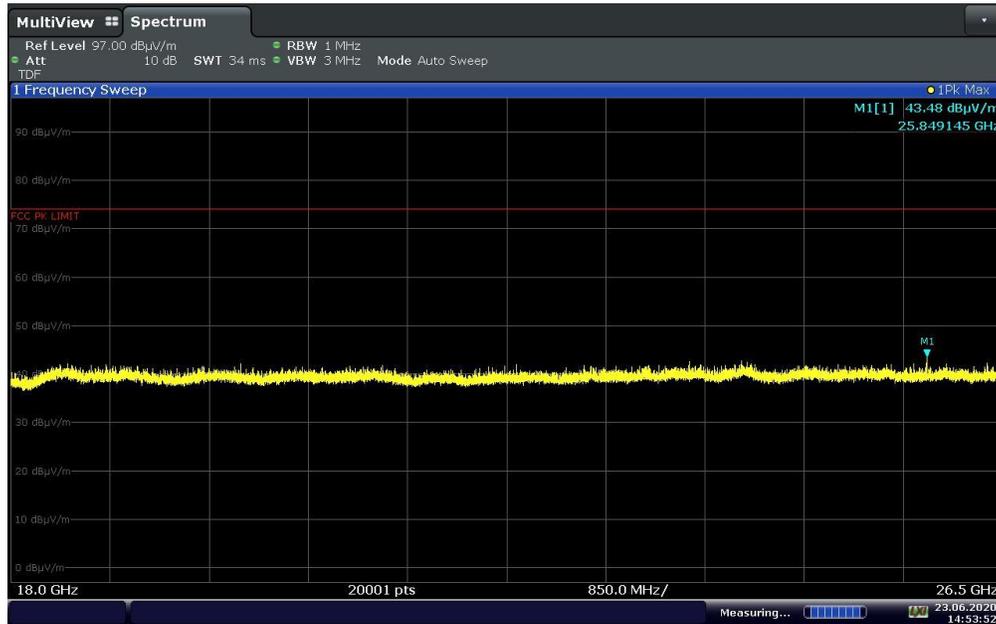

14:53:53 23.06.2020


Plot 7-103. Radiated Spurious Emissions above 18GHz CDD (802.11n – Ch.11, Pol V)

FCC ID: BCGA2270		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 89 of 111

### 7.7.4 SISO Core 0 - Radiated Restricted Band Edge Measurements §15.205 §15.209; RSS-Gen [8.9]


The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11b
Worst Case Transfer Rate:	1Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

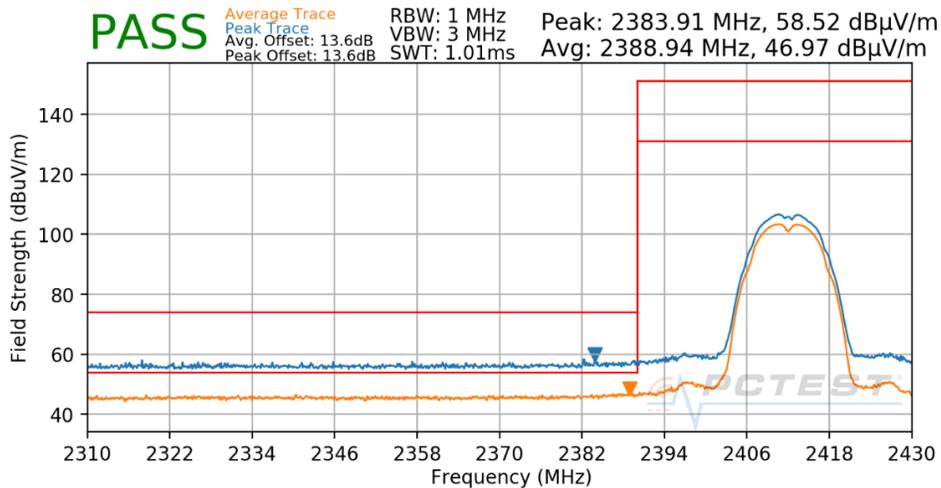

Plot 7-104. Radiated Restricted Lower Band Edge Measurement SISO CORE 0


Worst Case Mode:	802.11b
Worst Case Transfer Rate:	1Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	2467MHz
Channel:	12

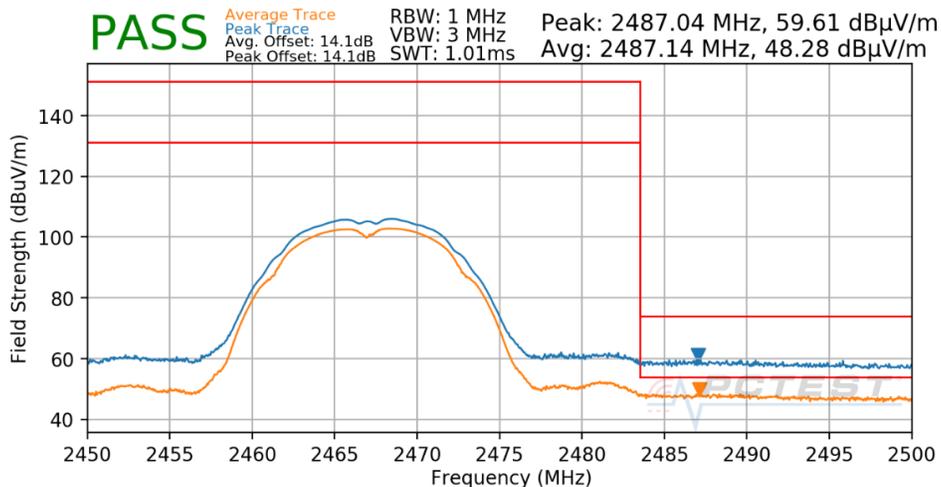

Plot 7-105. Radiated Restricted Upper Band Edge Measurement SISO CORE 0


FCC ID: BCGA2270		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 90 of 111

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2472MHz  
 Channel: 13

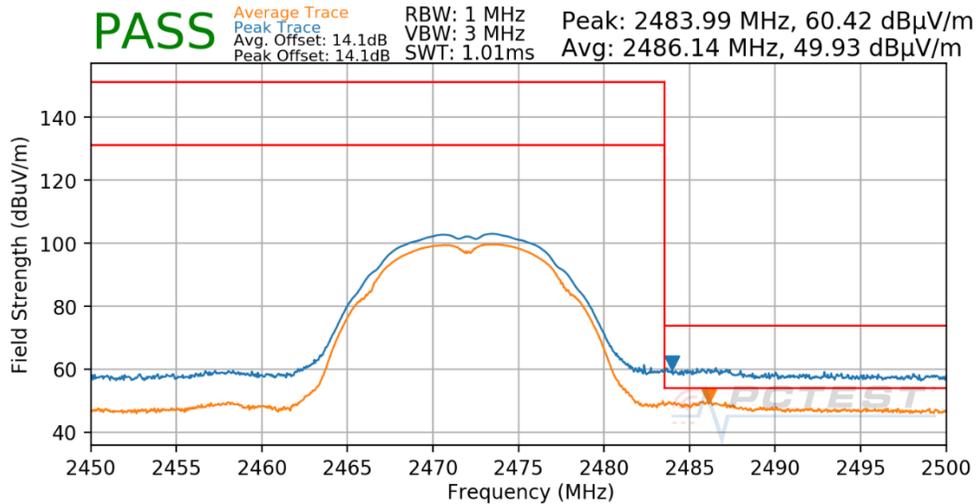

**Plot 7-106. Radiated Restricted Upper Band Edge Measurement SISO CORE 0**


Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 1

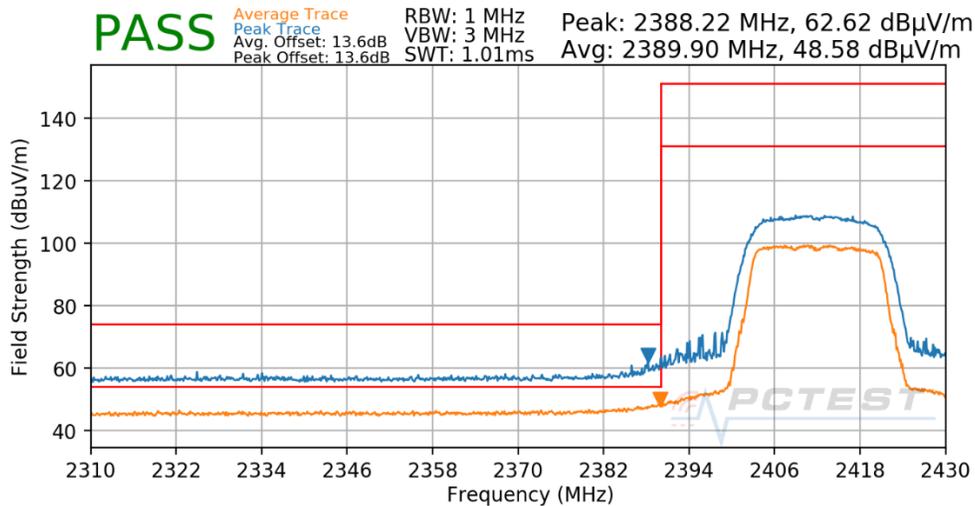

**Plot 7-107. Radiated Restricted Lower Band Edge Measurement SISO CORE 0**


FCC ID: BCGA2270		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 91 of 111

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2417MHz  
 Channel: 2

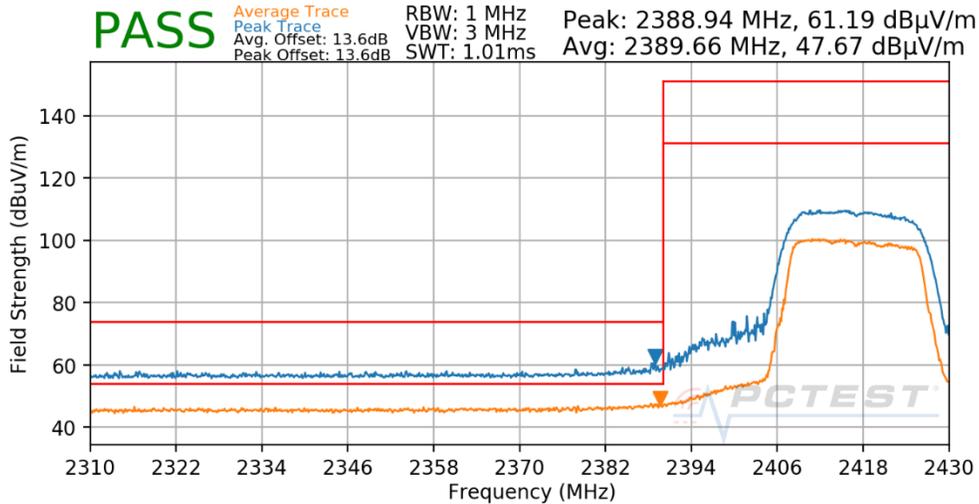

**Plot 7-108. Radiated Restricted Lower Band Edge Measurement SISO CORE 0**


Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2457MHz  
 Channel: 10

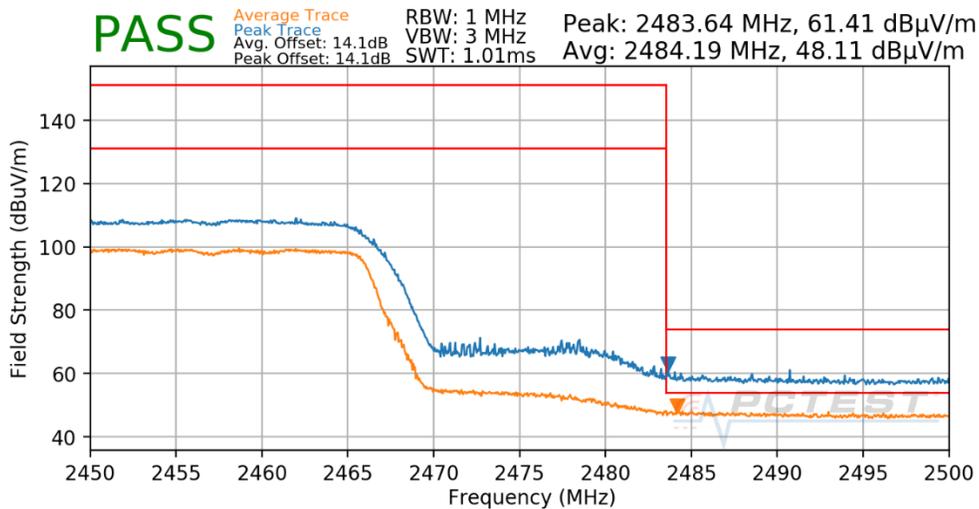

**Plot 7-109. Radiated Restricted Upper Band Edge Measurement SISO CORE 0**


FCC ID: BCGA2270		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 92 of 111

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

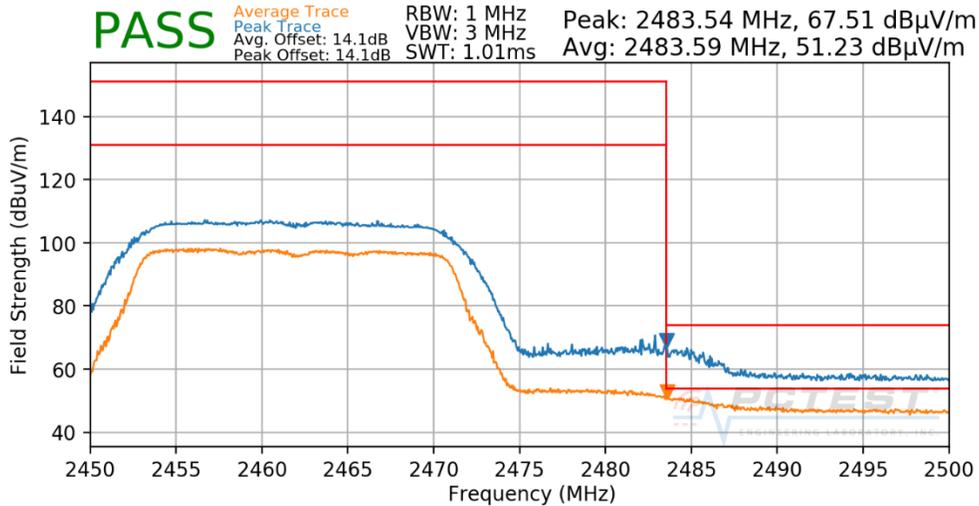

**Plot 7-110. Radiated Restricted Upper Band Edge Measurement SISO CORE 0**


Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2467MHz  
 Channel: 12

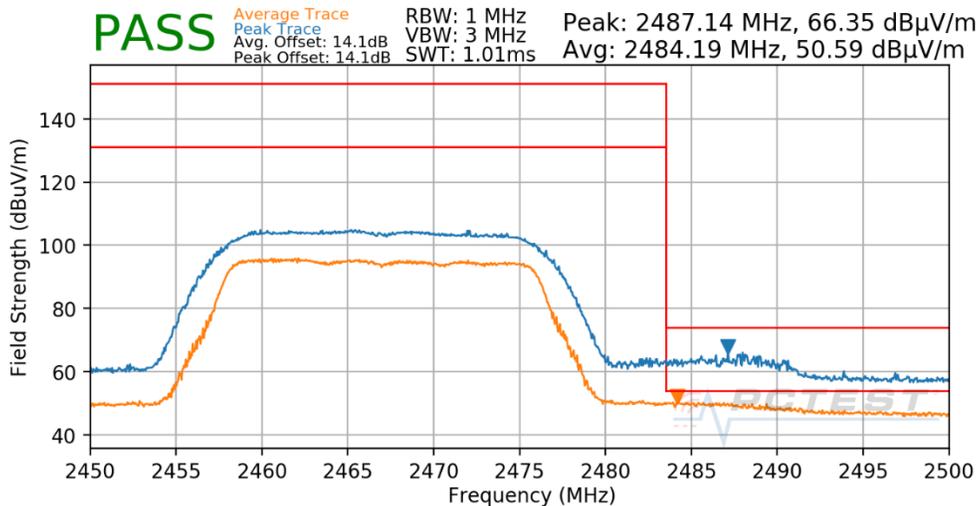

**Plot 7-111. Radiated Restricted Upper Band Edge Measurement SISO CORE 0**

FCC ID: BCGA2270		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 93 of 111

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2472MHz  
 Channel: 13

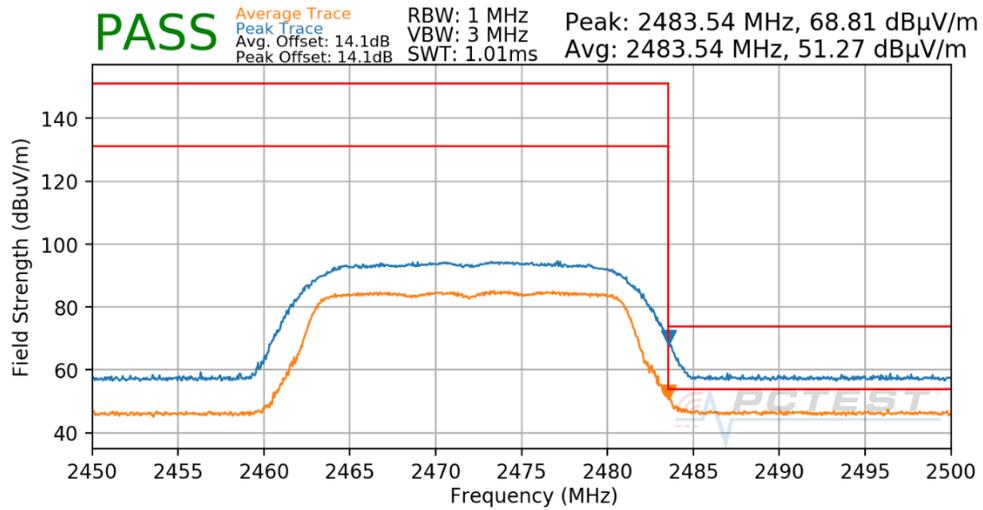


Plot 7-112. Radiated Restricted Upper Band Edge Measurement SISO CORE 0

FCC ID: BCGA2270		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 94 of 111

### 7.7.5 SISO Core 1 - Radiated Restricted Band Edge Measurements §15.205 §15.209; RSS-Gen [8.9]


The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11b
Worst Case Transfer Rate:	1Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

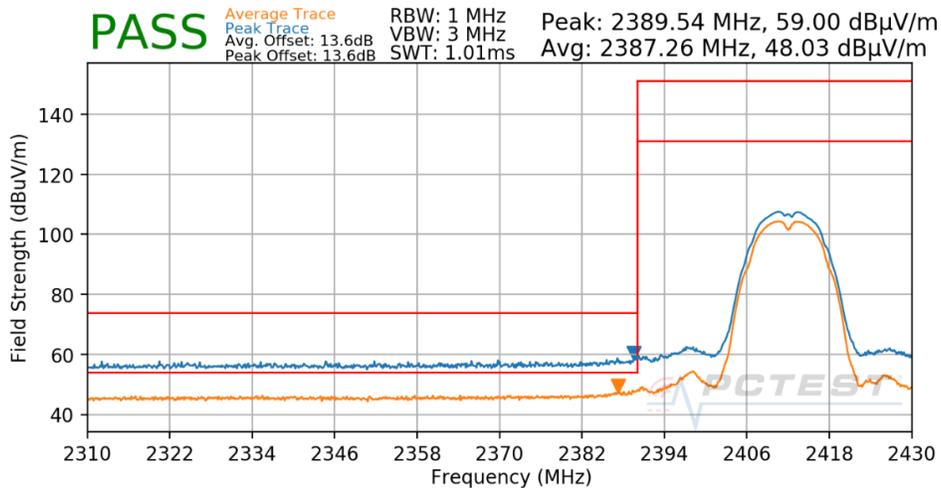

Plot 7-113. Radiated Restricted Lower Band Edge Measurement SISO CORE 1


Worst Case Mode:	802.11b
Worst Case Transfer Rate:	1Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	2467MHz
Channel:	12

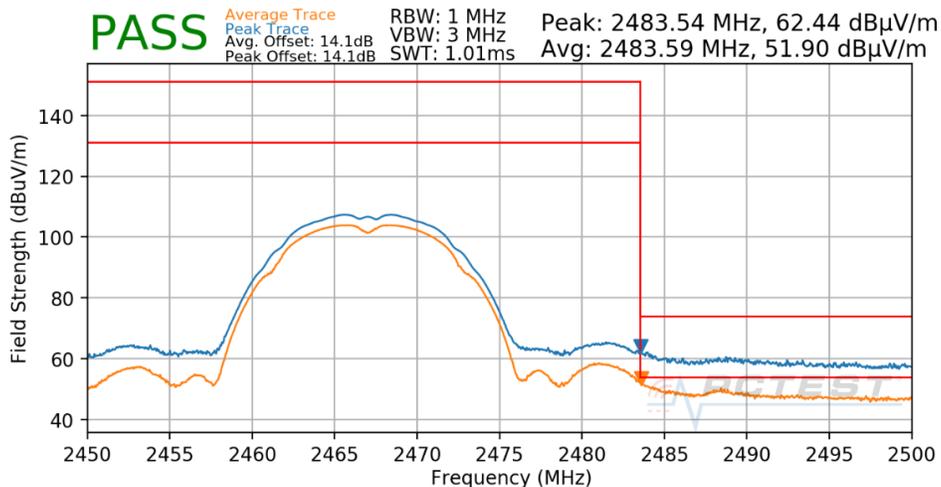

Plot 7-114. Radiated Restricted Upper Band Edge Measurement SISO CORE 1


FCC ID: BCGA2270		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 95 of 111

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2472MHz  
 Channel: 13

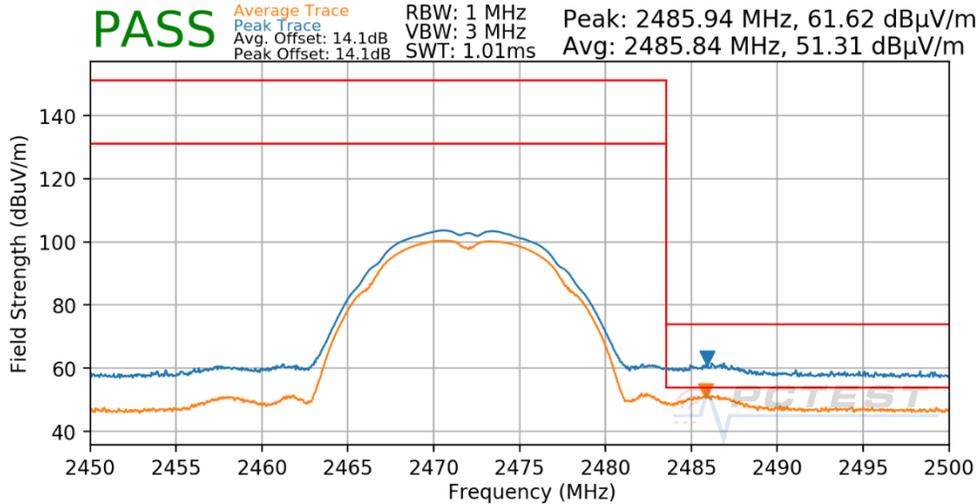

Plot 7-115. Radiated Restricted Upper Band Edge Measurement SISO CORE 1


Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 1

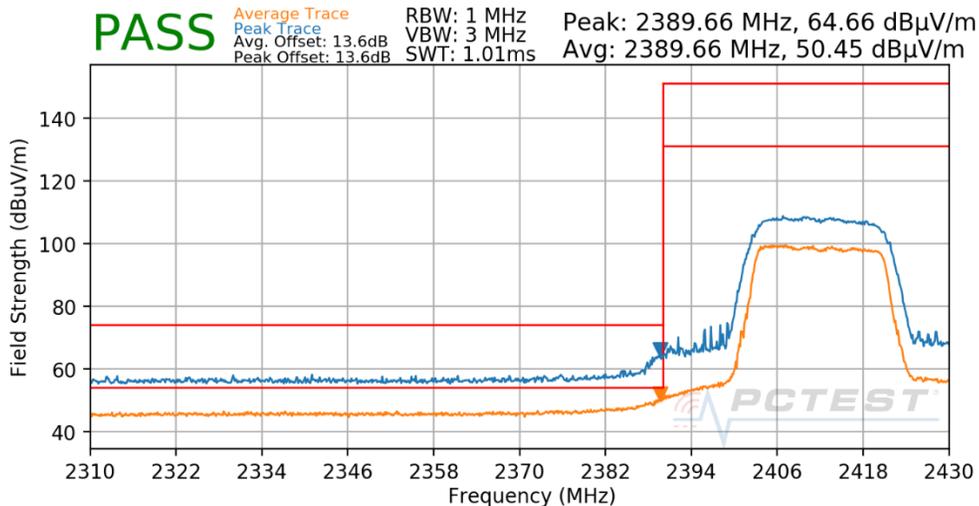

Plot 7-116. Radiated Restricted Lower Band Edge Measurement SISO CORE 1


FCC ID: BCGA2270		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 96 of 111

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2417MHz  
 Channel: 2

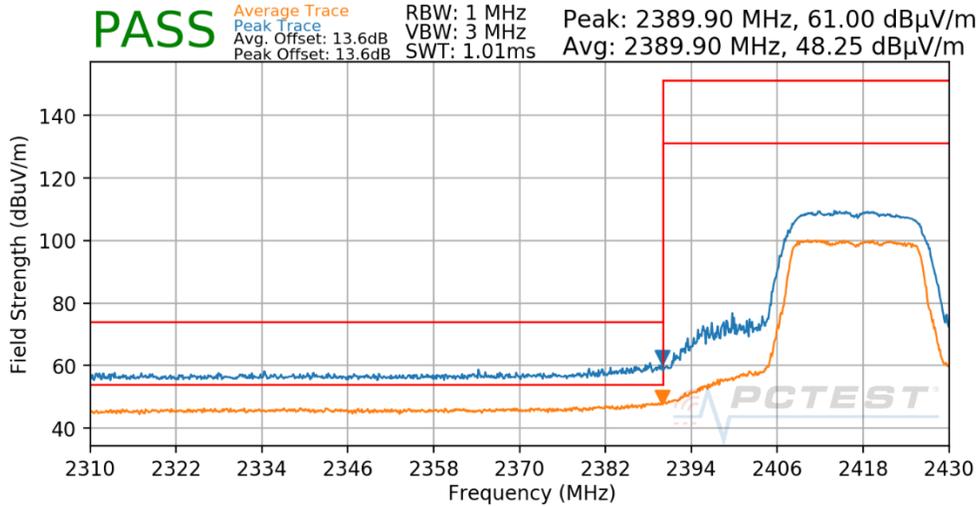

Plot 7-117. Radiated Restricted Lower Band Edge Measurement SISO CORE 1


Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2457MHz  
 Channel: 10

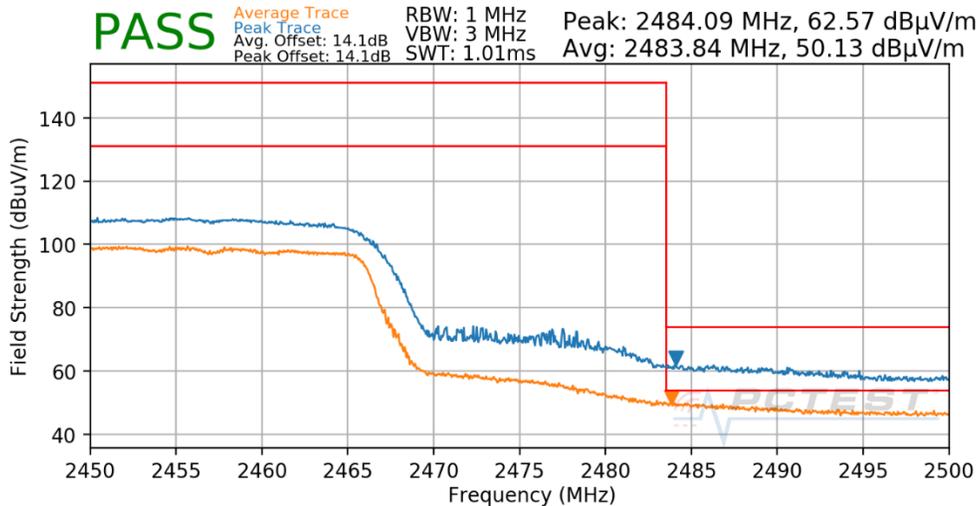

Plot 7-118. Radiated Restricted Upper Band Edge Measurement SISO CORE 1


FCC ID: BCGA2270		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 97 of 111

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

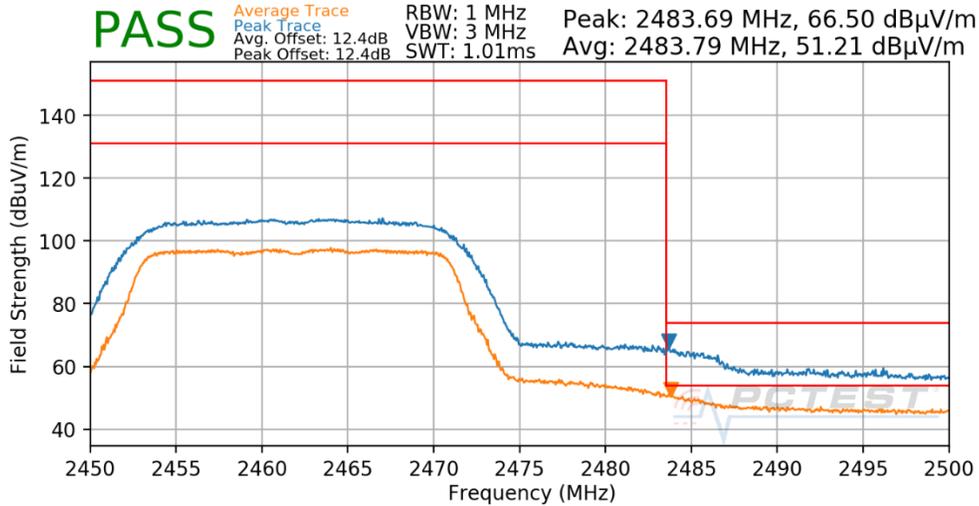

Plot 7-119. Radiated Restricted Upper Band Edge Measurement SISO CORE 1


Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2467MHz  
 Channel: 12

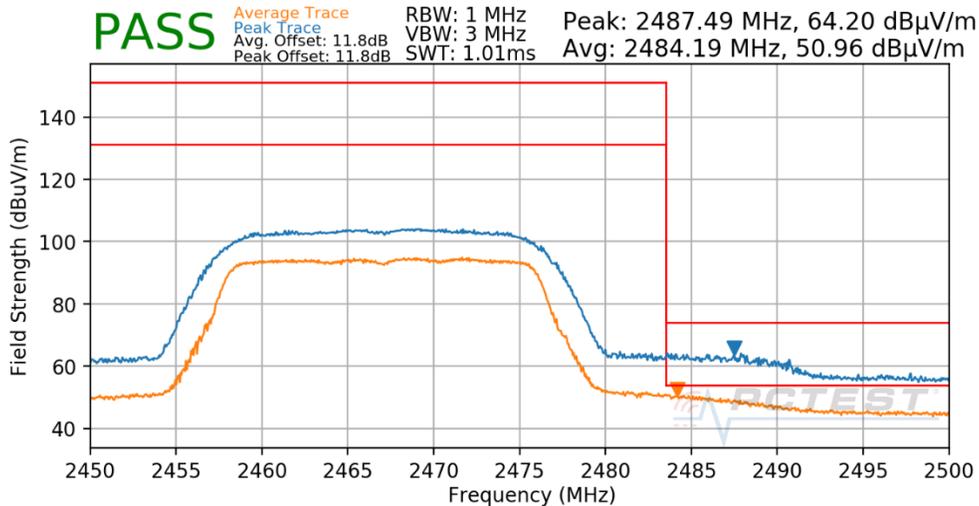

Plot 7-120. Radiated Restricted Upper Band Edge Measurement SISO CORE 1

FCC ID: BCGA2270		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 98 of 111

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2472MHz  
 Channel: 13

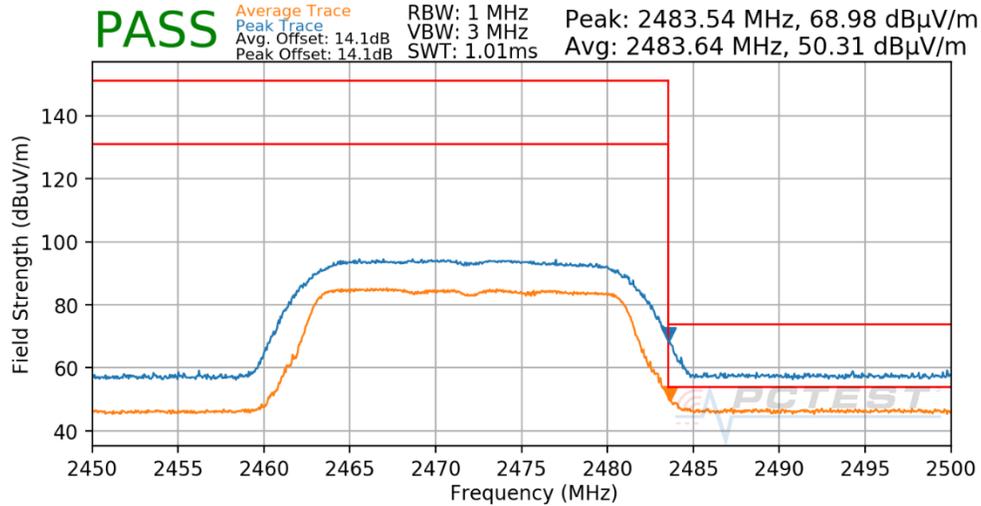

**Plot 7-121. Radiated Restricted Upper Band Edge Measurement SISO CORE 1**


FCC ID: BCGA2270		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 99 of 111

### 7.7.6 CDD - Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]


The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

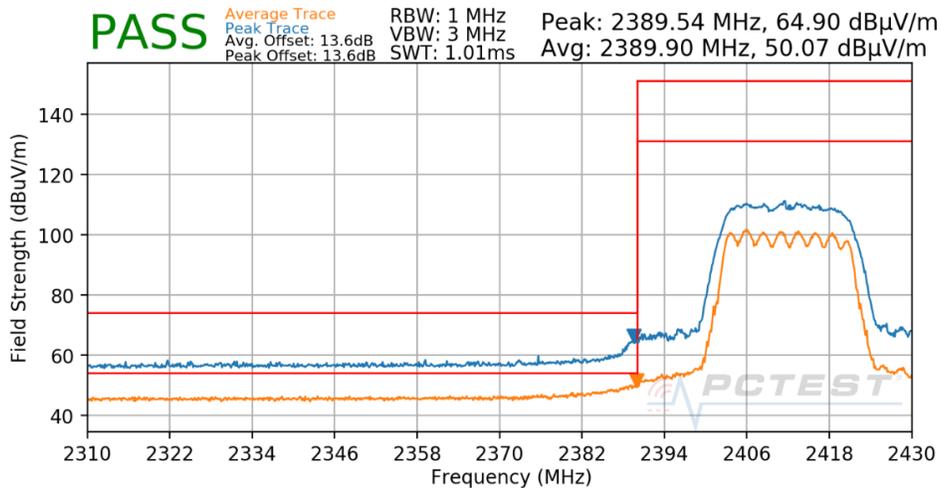

Plot 7-122. Radiated Restricted Lower Band Edge Measurement CDD


Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2417MHz
Channel:	2

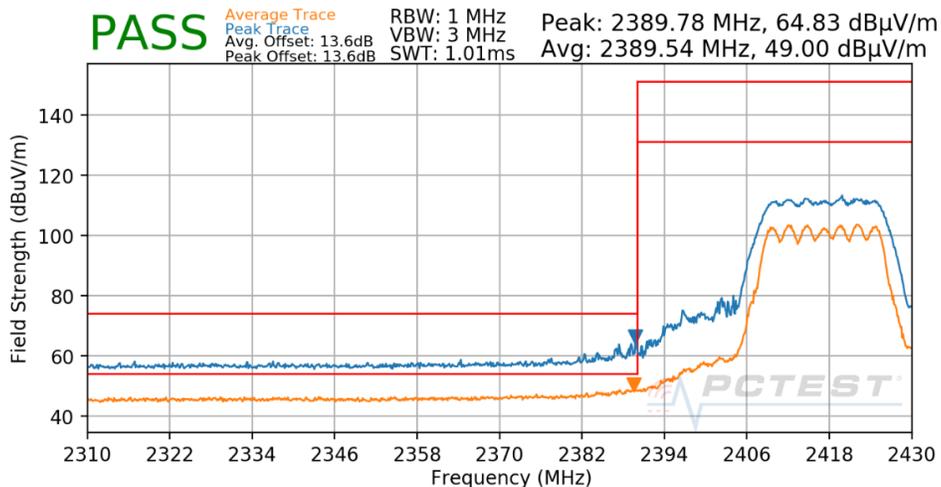

Plot 7-123. Radiated Restricted Lower Band Edge Measurement CDD


FCC ID: BCGA2270		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 100 of 111

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2457MHz  
 Channel: 10

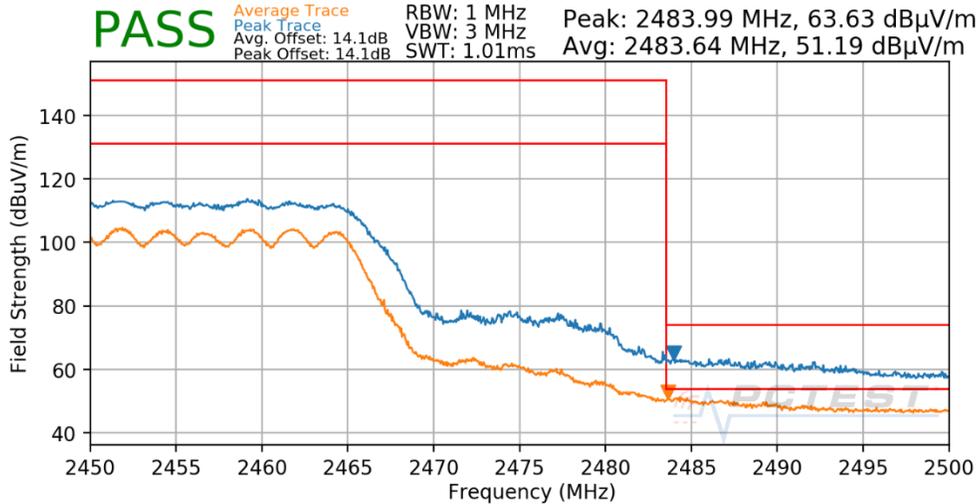

**Plot 7-124. Radiated Restricted Upper Band Edge Measurement CDD**


Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

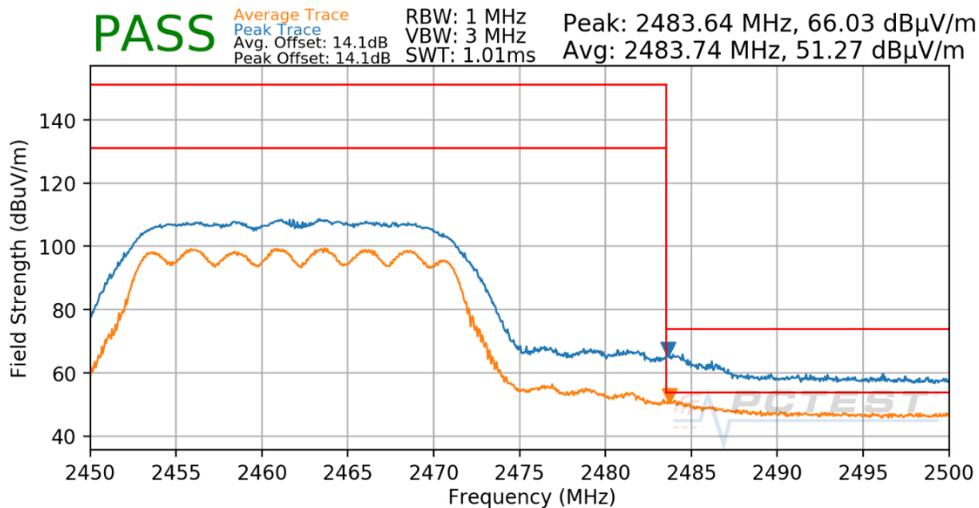

**Plot 7-125. Radiated Restricted Upper Band Edge Measurement CDD**


FCC ID: BCGA2270		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 101 of 111

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2467MHz  
 Channel: 12

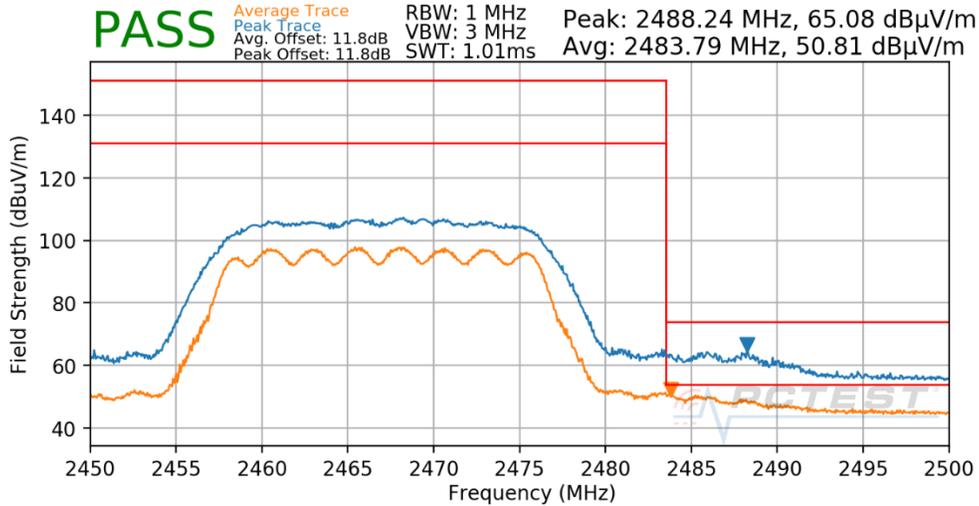

**Plot 7-126. Radiated Restricted Upper Band Edge Measurement CDD**

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2472MHz  
 Channel: 13

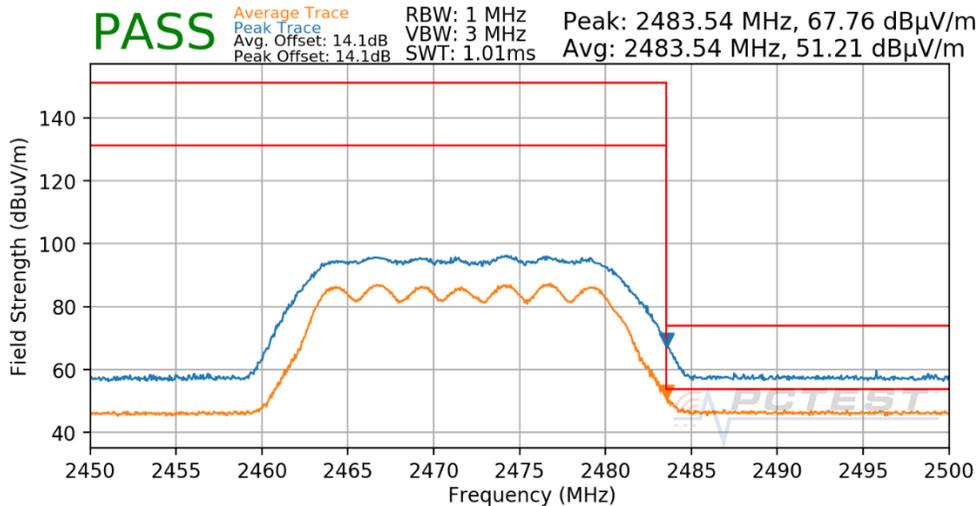

**Plot 7-127. Radiated Restricted Upper Band Edge Measurement CDD**

FCC ID: BCGA2270		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 102 of 111

## 7.8 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

**All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-25 per Section 15.209 and RSS-Gen (8.9).**

Frequency	Field Strength [ $\mu$ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

**Table 7-25. Radiated Limits**

### Test Procedures Used

ANSI C63.10-2013

### Test Settings

#### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


#### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold


FCC ID: BCGA2270	 PCTEST® Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 103 of 111

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagrams below.

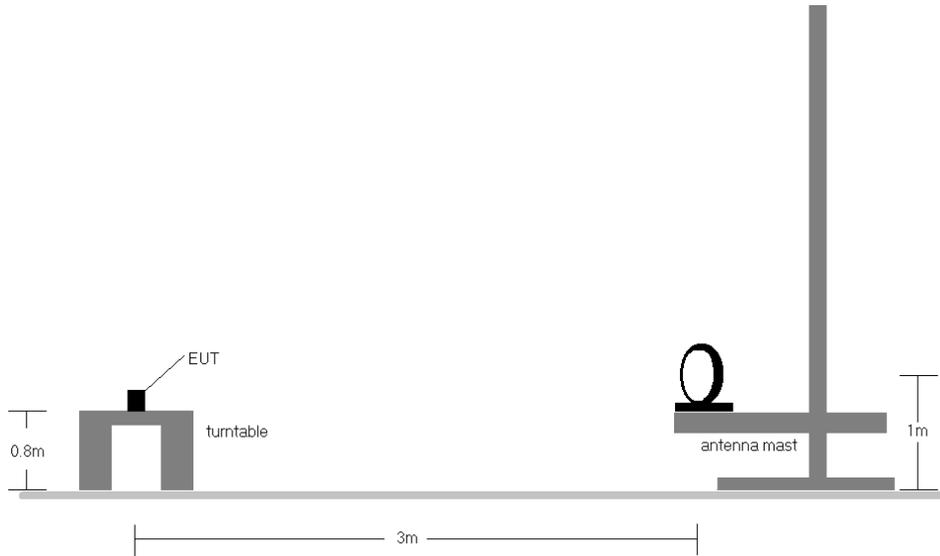

**Figure 7-7. Radiated Test Setup < 30Mhz**

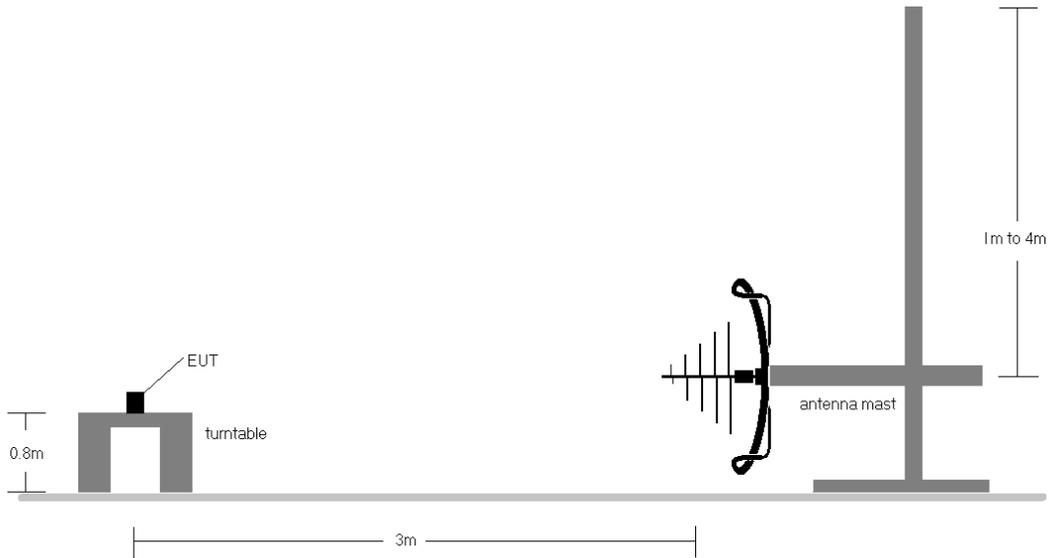

**Figure 7-8. Radiated Test Setup < 1GHz**

FCC ID: BCGA2270	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 104 of 111

## Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen(8.10) are below the limit shown in Table 7-25.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6dB of the limit. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. Both configurations below were investigated, and the worst case has been reported.
  - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
  - b. EUT powered by host PC via USB-C cable with wire charger
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.
10. All antenna configs were investigated and only the worst case is reported.


## Sample Calculations

### Determining Spurious Emissions Levels

- Field Strength Level  $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]} - \text{Preamplifier Gain }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

FCC ID: BCGA2270	 <b>PCTEST</b> Proud to be part of 	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1C2004270032-02.BCG	<b>Test Dates:</b> 05/01/2020 - 07/01/2020	<b>EUT Type:</b> Tablet Device	Page 105 of 111

## CDD - Radiated Spurious Emissions Measurements (Below 1GHz) §15.209; RSS-Gen [8.9]

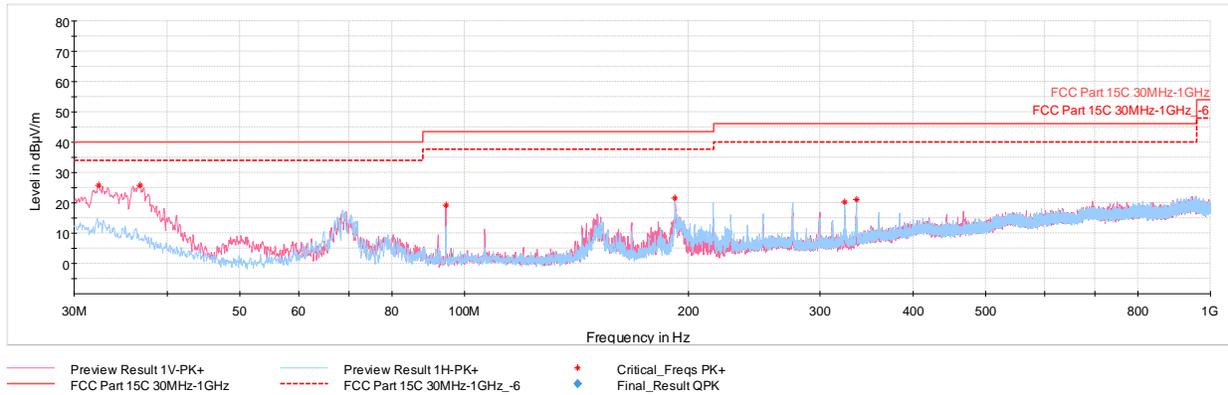

**Plot 7-128. Radiated Spurious Emissions below 1GHz CDD (Ch.6, with AC/DC Adapter)**

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
32.38	Max-Peak	V	100	299	-62.37	-18.71	25.92	40.00	-14.08
36.79	Max-Peak	V	100	63	-59.77	-21.31	25.92	40.00	-14.08
94.55	Max-Peak	V	100	114	-61.82	-26.01	19.17	43.52	-24.35
191.65	Max-Peak	V	100	123	-62.49	-22.90	21.61	43.52	-21.91
323.38	Max-Peak	H	100	122	-68.18	-18.69	20.13	46.02	-25.89
335.36	Max-Peak	H	100	298	-67.96	-17.94	21.10	46.02	-24.92

**Table 7-26. Radiated Spurious Emissions below 1GHz CDD (Ch.6, with AC/DC Adapter)**

FCC ID: BCGA2270		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device		Page 106 of 111

## 7.9 AC Line-Conducted Emission Measurement

§15.207; RSS-Gen [8.8]

### Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

**All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).**

Frequency of emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

**Table 7-27. Conducted Limits**

\*Decreases with the logarithm of the frequency.

### Test Procedures Used

ANSI C63.10-2013, Section 6.2

### Test Settings

#### Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


#### Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA2270		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 107 of 111

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

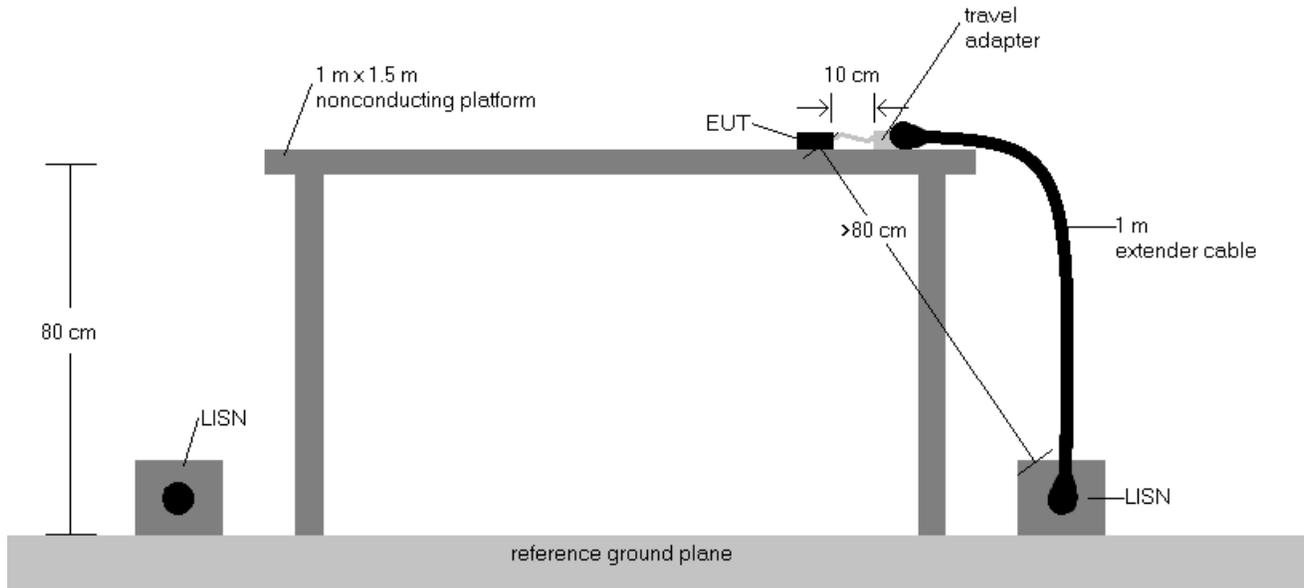


**Figure 7-9. Test Instrument & Measurement Setup**

## Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
  - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
  - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
4.  $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5.  $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
6.  $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
7. Traces shown in plot are made using quasi-peak and average detectors.
8. Deviations to the Specifications: None.
9. Both configurations below were investigated, and the worst case has been reported.

FCC ID: BCGA2270	 <b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 108 of 111

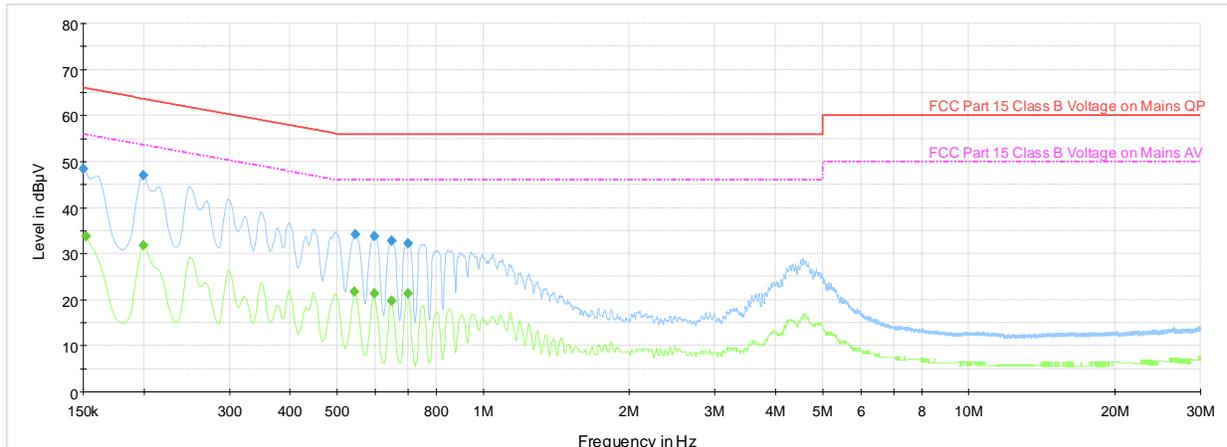


◆ Preview Result 2-AVG      — Preview Result 1-QPK      ★ Critical\_Freqs AVG  
★ Critical\_Freqs QPK      — FCC Part 15 Class B Voltage on Mains QP      - - - FCC Part 15 Class B Voltage on Mains AV  
◆ Final\_Result QPK      ◆ Final\_Result AVG

**Plot 7-129. AC Line Conducted Plot with 802.11n CDD Ch.6 (L1, with AC/DC Adapter)**

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.150	FINAL	48.5	—	66.00	-17.54	L1	GND
0.152	FINAL	—	33.76	55.88	-22.12	L1	GND
0.200	FINAL	46.9	—	63.63	-16.69	L1	GND
0.200	FINAL	—	31.79	53.63	-21.84	L1	GND
0.544	FINAL	—	21.78	46.00	-24.22	L1	GND
0.546	FINAL	34.1	—	56.00	-21.92	L1	GND
0.596	FINAL	—	21.34	46.00	-24.66	L1	GND
0.596	FINAL	33.8	—	56.00	-22.20	L1	GND
0.647	FINAL	—	19.77	46.00	-26.23	L1	GND
0.647	FINAL	32.8	—	56.00	-23.24	L1	GND
0.699	FINAL	32.3	—	56.00	-23.70	L1	GND
0.699	FINAL	—	21.32	46.00	-24.68	L1	GND

**Table 7-28. AC Line Conducted Data with 802.11n CDD Ch.6 (L1, with AC/DC Adapter)**

FCC ID: BCGA2270		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 109 of 111

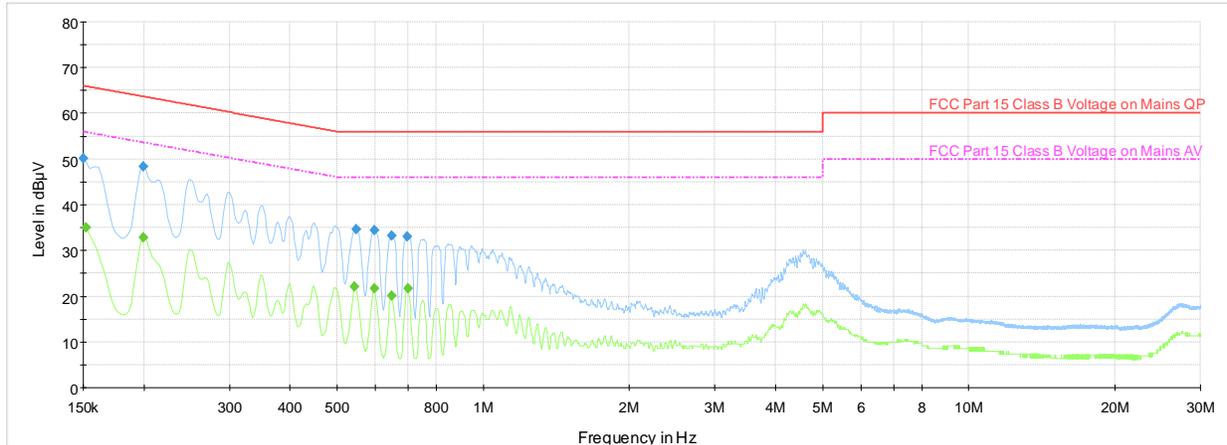

◆ Preview Result 2-AVG      — Preview Result 1-QPK      ★ Critical\_Freqs AVG  
★ Critical\_Freqs QPK      — FCC Part 15 Class B Voltage on Mains QP      - - - FCC Part 15 Class B Voltage on Mains AV  
◆ Final\_Result QPK      ◆ Final\_Result AVG

**Plot 7-130. AC Line Conducted Plot with 802.11n CDD Ch.6 (N, with AC/DC Adapter)**

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.150	FINAL	50.2	—	66.00	-15.83	N	GND
0.152	FINAL	—	35.12	55.88	-20.75	N	GND
0.200	FINAL	48.3	—	63.63	-15.34	N	GND
0.200	FINAL	—	32.89	53.63	-20.74	N	GND
0.544	FINAL	—	22.18	46.00	-23.82	N	GND
0.548	FINAL	34.7	—	56.00	-21.31	N	GND
0.596	FINAL	—	21.63	46.00	-24.37	N	GND
0.596	FINAL	34.4	—	56.00	-21.64	N	GND
0.647	FINAL	—	20.11	46.00	-25.89	N	GND
0.647	FINAL	33.3	—	56.00	-22.73	N	GND
0.697	FINAL	33.1	—	56.00	-22.89	N	GND
0.699	FINAL	—	21.73	46.00	-24.27	N	GND

**Table 7-29. AC Line Conducted Data with 802.11n CDD Ch.6 (N, with AC/DC Adapter)**

FCC ID: BCGA2270		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 110 of 111

## 8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA2270** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA2270	 <b>PCTEST</b> <sup>®</sup> <small>Proud to be part of  element</small>	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Quality Manager
Test Report S/N: 1C2004270032-02.BCG	Test Dates: 05/01/2020 - 07/01/2020	EUT Type: Tablet Device	Page 111 of 111