
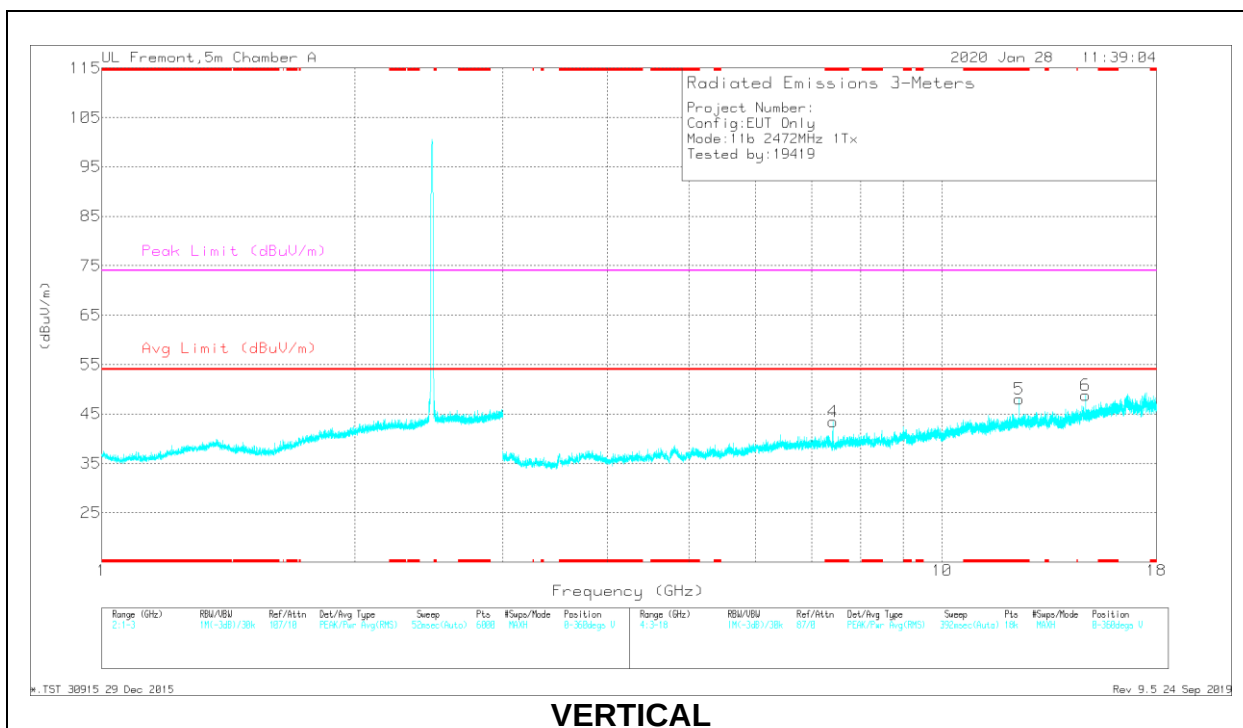


HIGH CHANNEL, CH 13 RESULTS

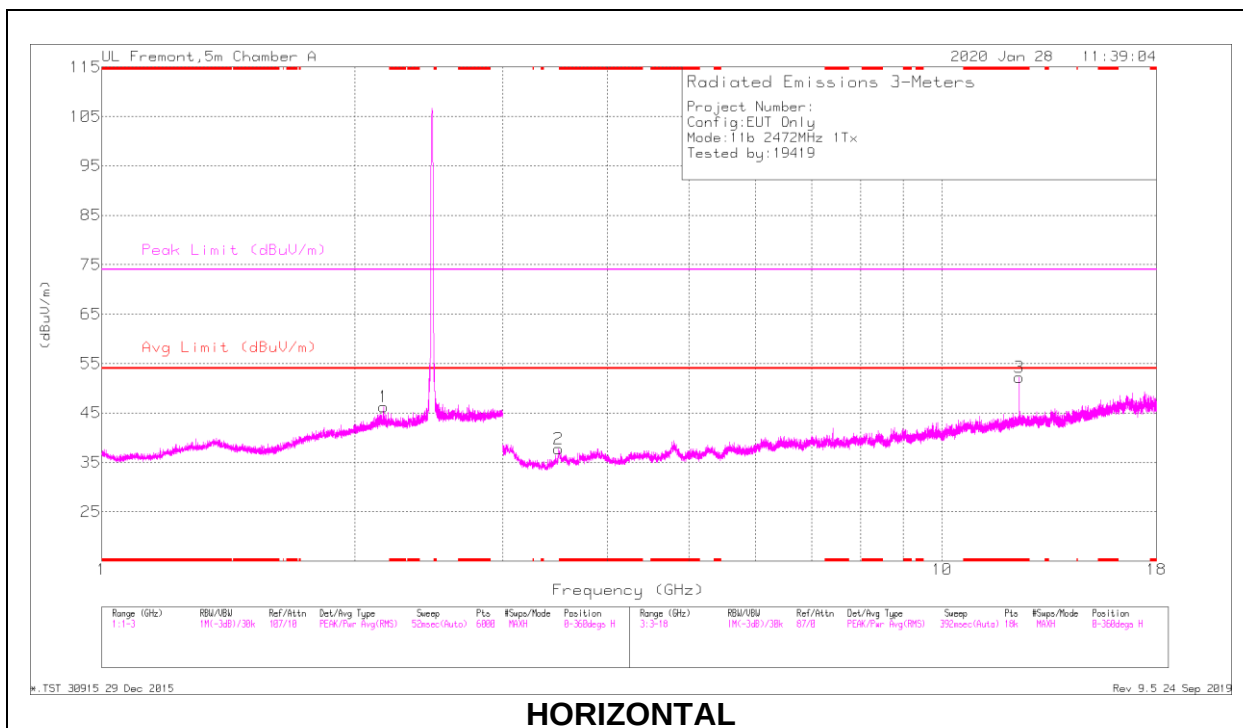

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.1644	44.47	PK2	31.5	-23.6	52.37	-	-	-	-	212	184	H
2	* 3.92638	40.34	PK2	33.5	-29.4	44.44	-	-	74	-29.56	252	150	H
	* 3.87725	27.72	MAv1	33.6	-29.4	31.92	54	-22.08	-	-	252	150	H
3	* 12.36148	37.23	PK2	39	-19.9	56.33	-	-	74	-17.67	70	101	H
	* 12.36119	29.01	MAv1	39	-19.9	48.11	54	-5.89	-	-	70	101	H
4	* 7.41432	37.65	PK2	35.7	-23.9	49.45	-	-	74	-24.55	360	122	V
	* 7.41702	27.46	MAv1	35.8	-24	39.26	54	-14.74	-	-	360	122	V
5	* 12.35977	35.51	PK2	39	-19.9	54.61	-	-	74	-19.39	201	151	V
	* 12.36104	23.93	MAv1	39	-19.9	43.03	54	-10.97	-	-	201	151	V
6	14.83273	36.06	PK2	39.7	-19.9	55.86	-	-	-	-	210	112	V

* - indicates frequency in CFR47 Pt 15


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

10.1.2. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 2.4 GHz BAND

BANDEDGE (LOW CHANNEL, CH 1)

HORIZONTAL RESULT

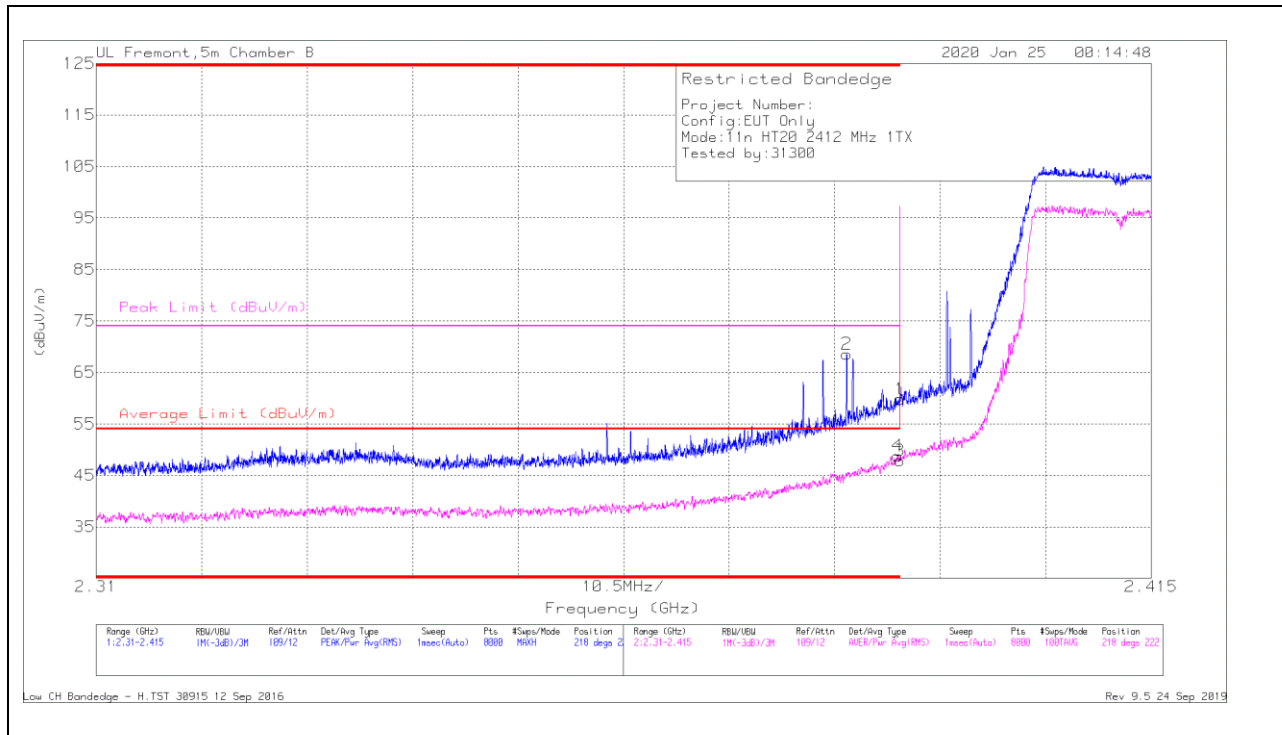


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF PRE0194893 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	48.41	Pk	30.3	-18.9	59.81	-	-	74	-14.19	218	222	H
2	* 2.38469	57.26	Pk	30.2	-18.9	68.56	-	-	74	-5.44	218	222	H
3	* 2.39	36.46	RMS	30.3	-18.9	47.86	54	-6.14	-	-	218	222	H
4	* 2.38976	37.38	RMS	30.3	-18.9	48.78	54	-5.22	-	-	218	222	H

* - indicates frequency in CFR47 Pt 15

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

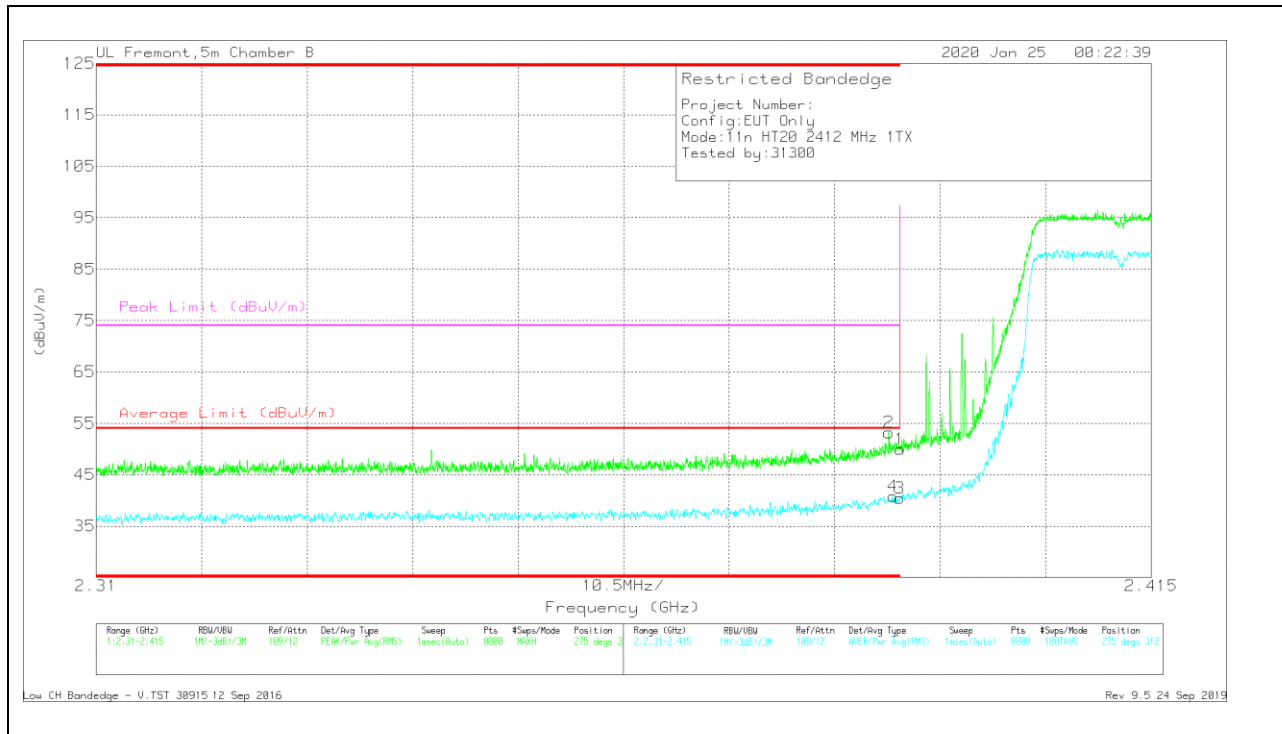

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF PRE0194893 (dB/m)	Ampl/Chl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.55	Pk	30.3	-18.9	49.95	-	-	74	-24.05	275	312	V
2	* 2.38889	41.81	Pk	30.3	-18.9	53.21	-	-	74	-20.79	275	312	V
3	* 2.39	29.02	RMS	30.3	-18.9	40.42	54	-13.58	-	-	275	312	V
4	* 2.38927	29.39	RMS	30.3	-18.9	40.79	54	-13.21	-	-	275	312	V


* - indicates frequency in CFR47 Pt 15

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

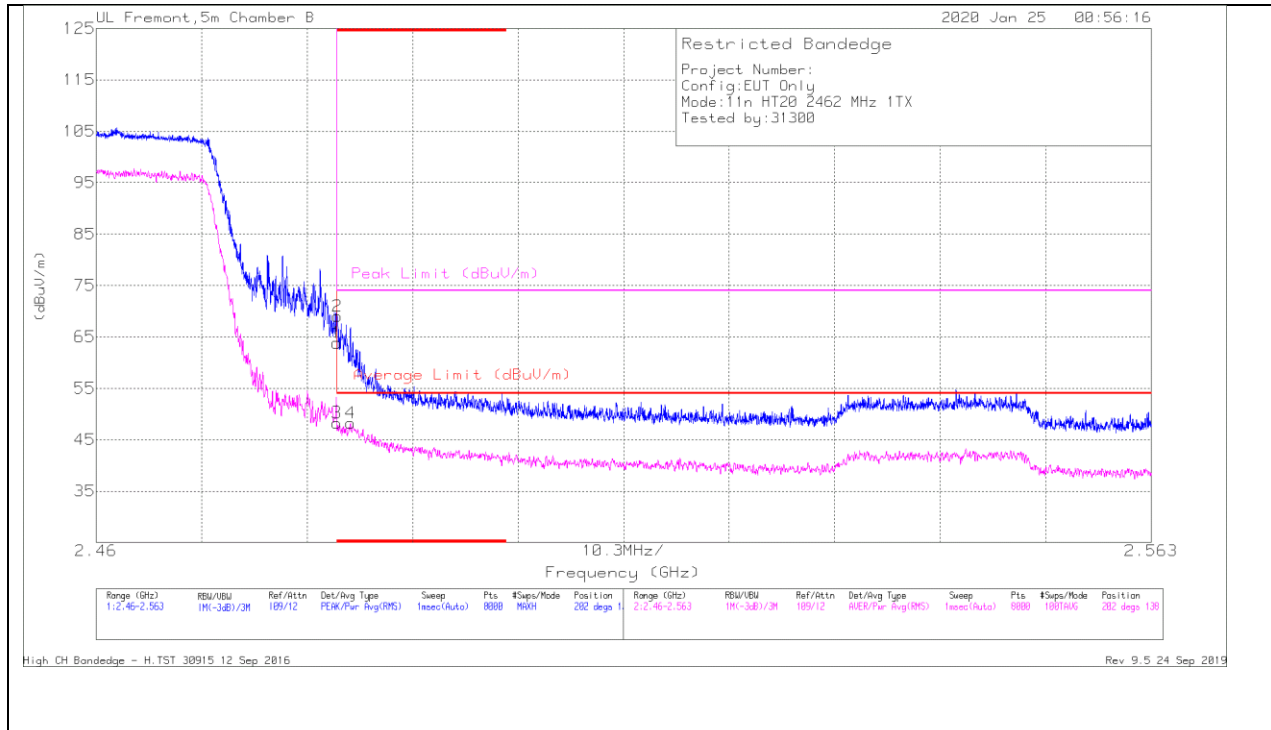


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF PRE0194893 (dB/m)	Amp/Cbll/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	52.54	Pk	30.2	-18.9	63.84	-	-	74	-10.16	202	138	H
2	* 2.48356	57.7	Pk	30.2	-18.9	69	-	-	74	-5	202	138	H
3	* 2.4835	36.98	RMS	30.2	-18.9	48.28	54	-5.72	-	-	202	138	H
4	* 2.48484	36.92	RMS	30.2	-18.9	48.22	54	-5.78	-	-	202	138	H

* - indicates frequency in CFR47 Pt 15

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

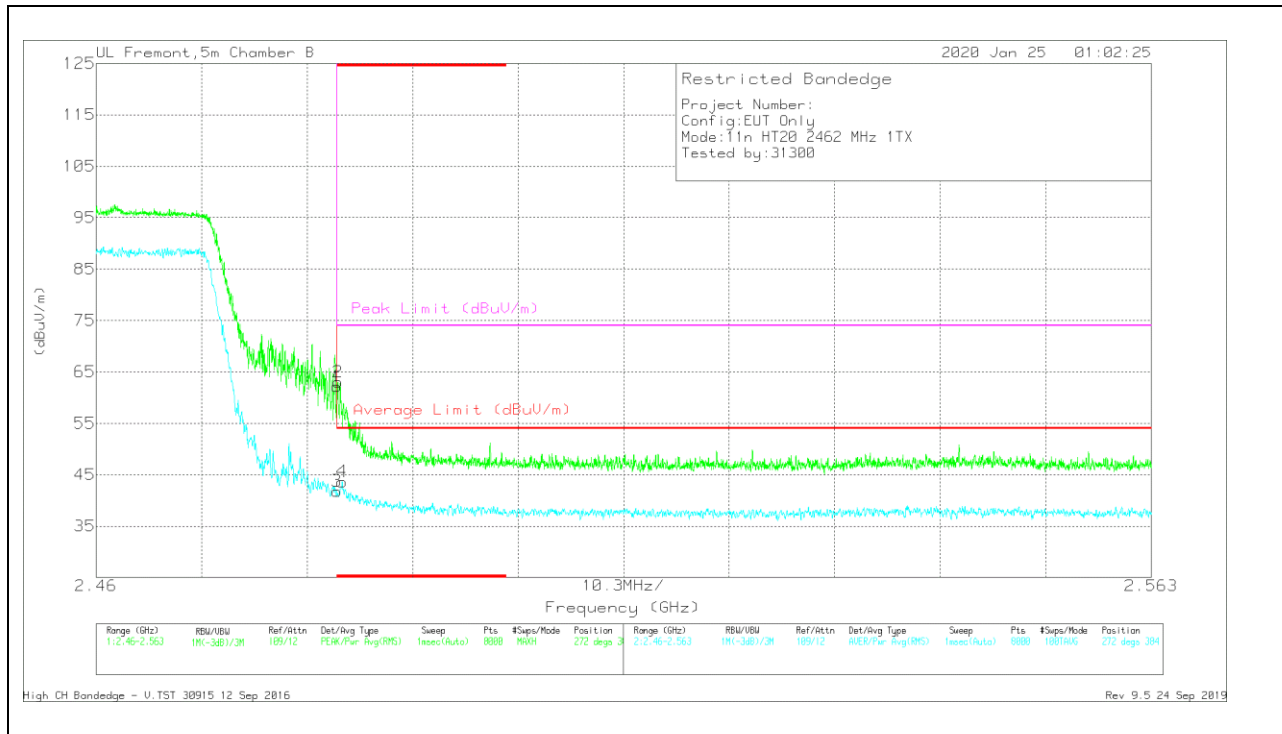

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF PRE0194893 (dB/m)	Ampl/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	50.87	Pk	30.2	-18.9	62.17	-	-	74	-11.83	272	384	V
2	* 2.4836	51.74	Pk	30.2	-18.9	63.04	-	-	74	-10.96	272	384	V
3	* 2.4835	30.52	RMS	30.2	-18.9	41.82	54	-12.18	-	-	272	384	V
4	* 2.48403	32.35	RMS	30.2	-18.9	43.65	54	-10.35	-	-	272	384	V


* - indicates frequency in CFR47 Pt 15

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)

HORIZONTAL RESULT

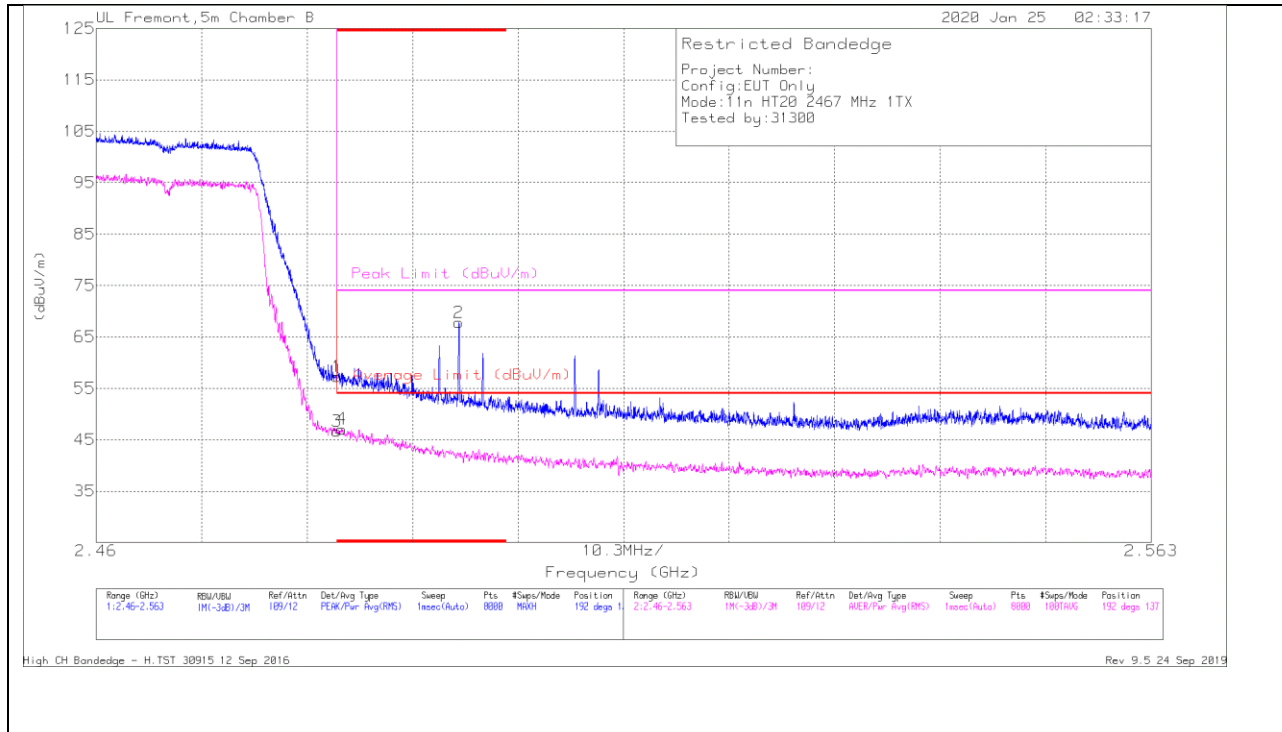


Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	AF PRE0194893 (dB/m)	Amp/Cbll/Filtr/Pad (dB)	Corrected Reading (dBUV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	46	Pk	30.2	-18.9	57.3	-	-	74	-16.7	192	137	H
2	* 2.49542	56.58	Pk	30.1	-18.9	67.78	-	-	74	-6.22	192	137	H
3	* 2.4835	35.33	RMS	30.2	-18.9	46.63	54	-7.37	-	-	192	137	H
4	* 2.48396	35.78	RMS	30.2	-18.9	47.08	54	-6.92	-	-	192	137	H

* - indicates frequency in CFR47 Pt 15

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

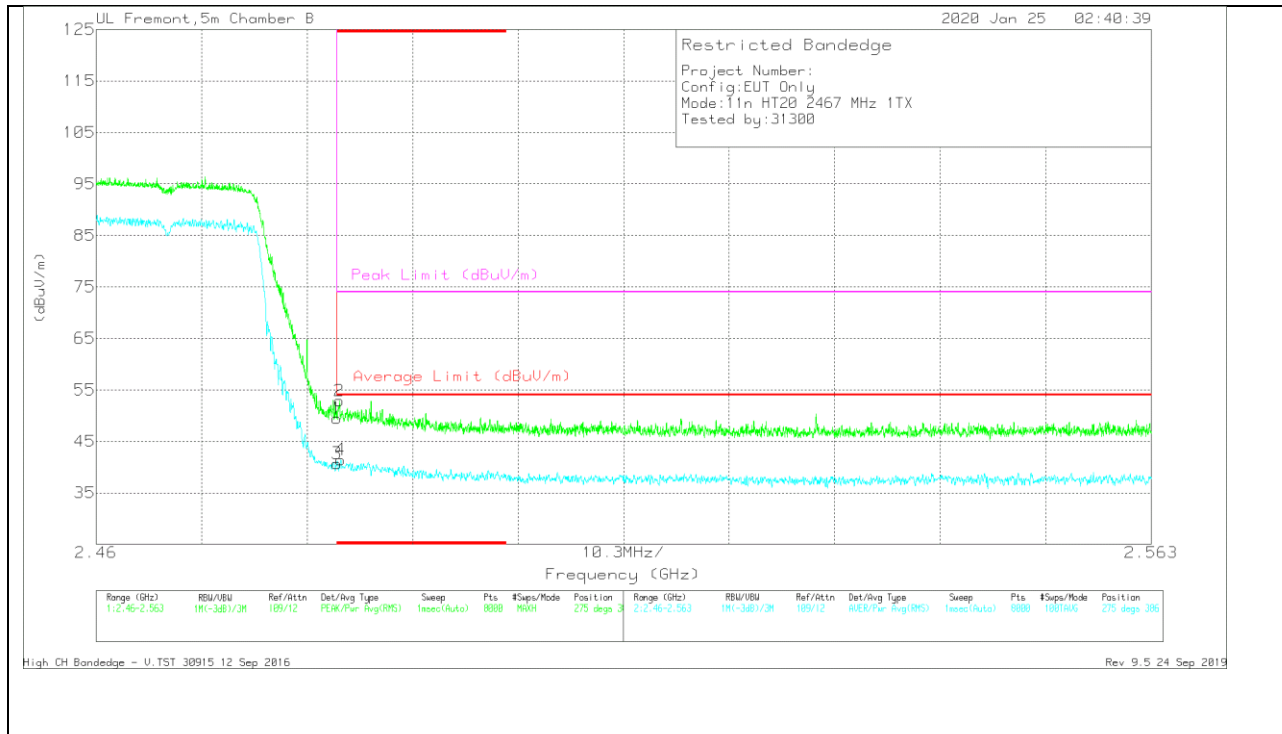

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF PRE0194893 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	38.14	Pk	30.2	-18.9	49.44	-	-	74	-24.56	275	386	V
2	* 2.48376	41.56	Pk	30.2	-18.9	52.86	-	-	74	-21.14	275	386	V
3	* 2.4835	29.4	RMS	30.2	-18.9	40.7	54	-13.3	-	-	275	386	V
4	* 2.48389	30.13	RMS	30.2	-18.9	41.43	54	-12.57	-	-	275	386	V


* - indicates frequency in CFR47 Pt 15

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

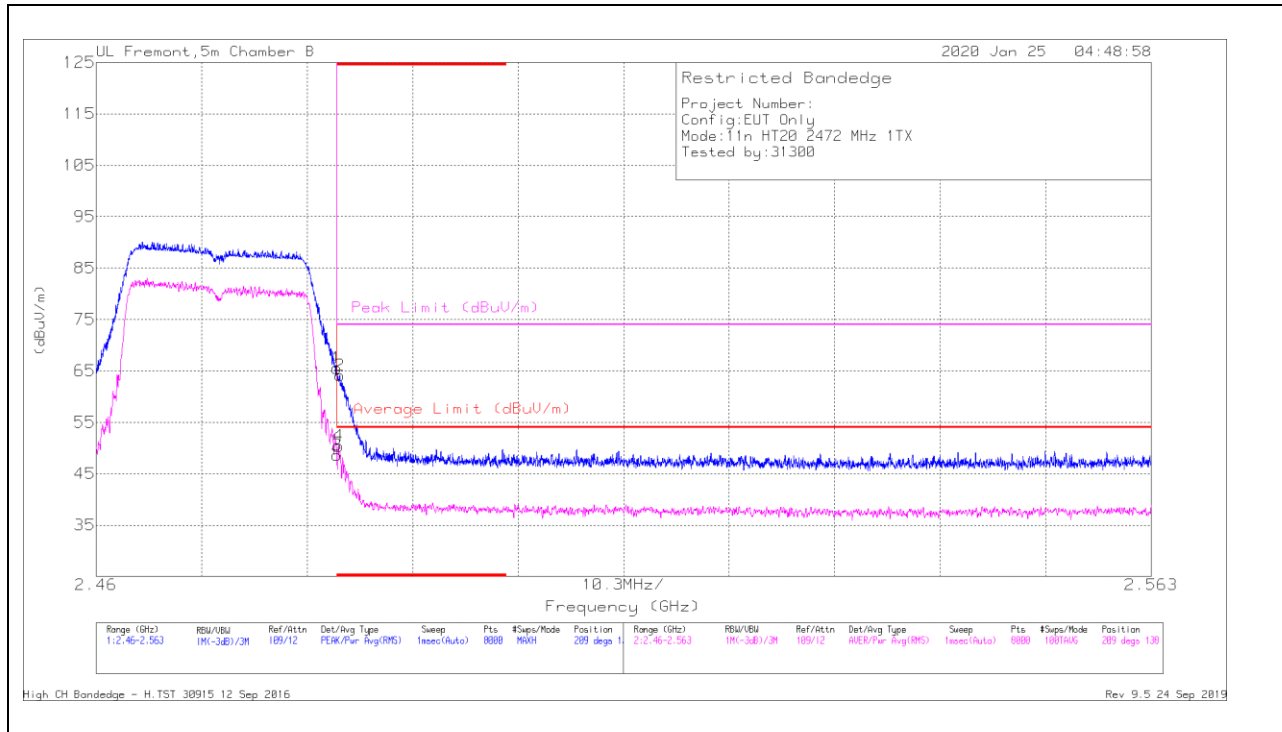


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF PRE0194893 (dB/m)	Amp/Cbll/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	54.25	Pk	30.2	-18.9	65.55	-	-	74	-8.45	209	138	H
2	* 2.4838	52.81	Pk	30.2	-18.9	64.11	-	-	74	-9.89	209	138	H
3	* 2.4835	37.3	RMS	30.2	-18.9	48.6	54	-5.4	-	-	209	138	H
4	* 2.48366	39.1	RMS	30.2	-18.9	50.4	54	-3.6	-	-	209	138	H

* - indicates frequency in CFR47 Pt 15

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

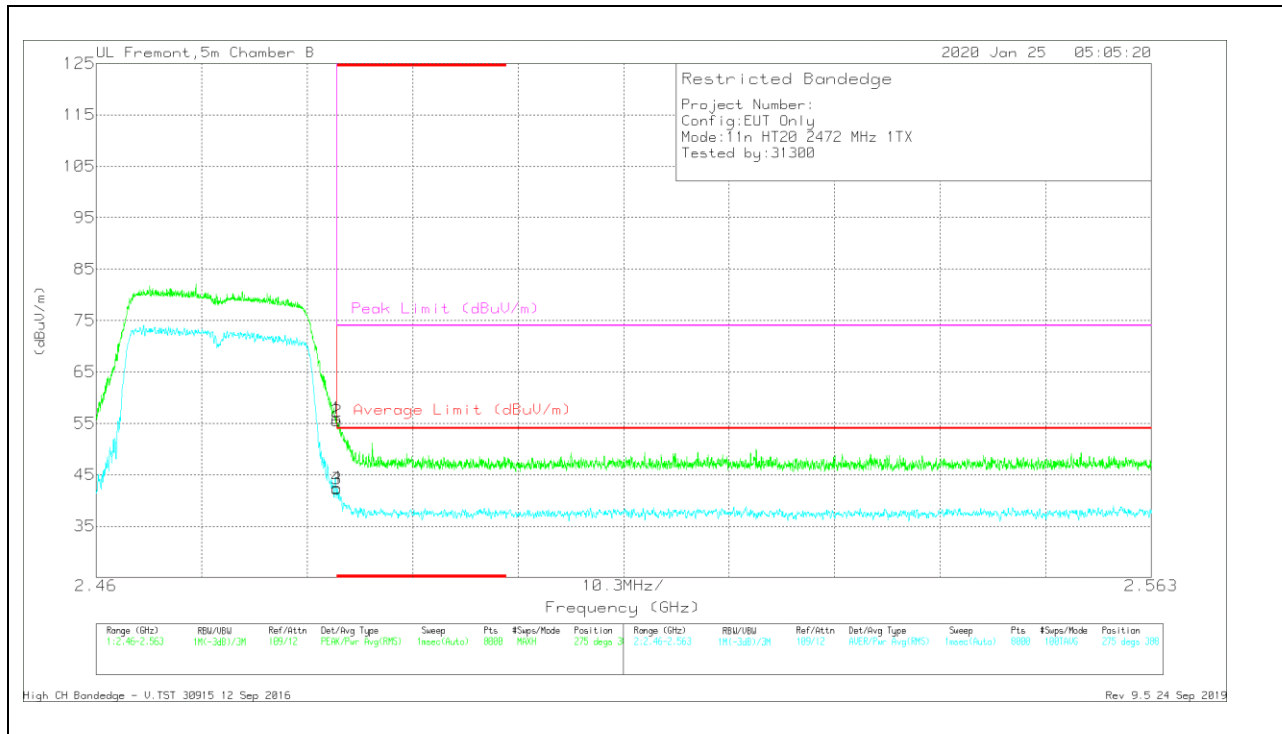

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF PRE0194893 (dB/m)	Amp/Cb/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	44.66	Pk	30.2	-18.9	55.96	-	-	74	-18.04	275	388	V
2	* 2.48353	44.16	Pk	30.2	-18.9	55.46	-	-	74	-18.54	275	388	V
3	* 2.4835	30.96	RMS	30.2	-18.9	42.26	54	-11.74	-	-	275	388	V
4	* 2.48351	31.16	RMS	30.2	-18.9	42.46	54	-11.54	-	-	275	388	V



* - indicates frequency in CFR47 Pt 15

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL, CH 1 RESULTS

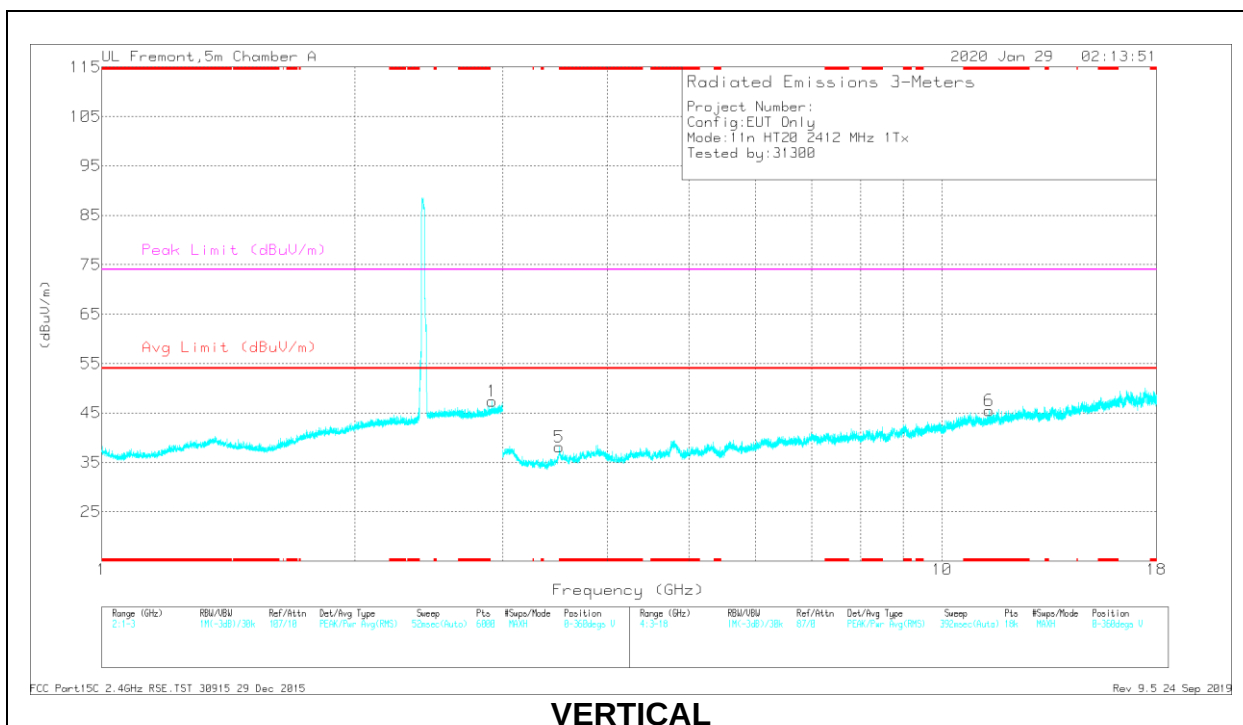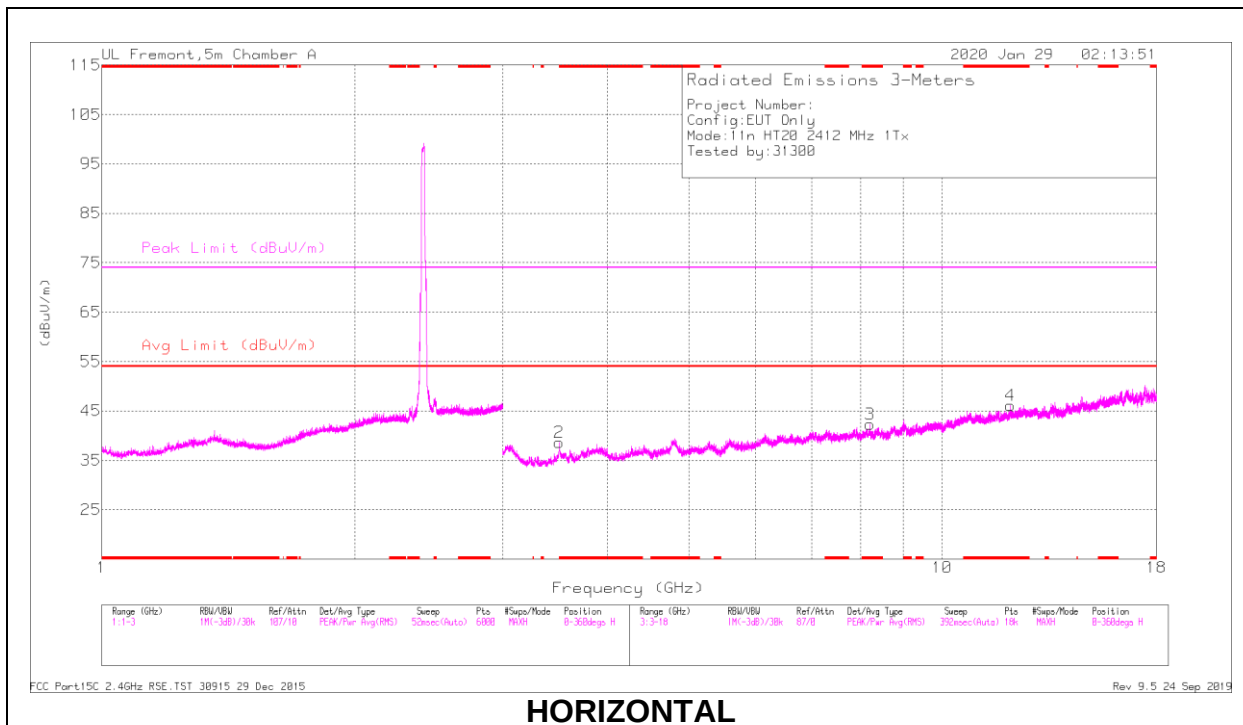

RADIATED EMISSIONS



Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.50259	40.85	PK2	34.2	-29.6	45.45	-	-	74	-28.55	79	233	H
* 3.50351	28.73	MAv1	34.2	-29.6	33.33	54	-20.67	-	-	79	233	H
* 8.20576	34.49	PK2	35.8	-22	48.29	-	-	74	-25.71	174	160	H
* 8.20592	22.75	MAv1	35.8	-22	36.55	54	-17.45	-	-	174	160	H
* 12.06107	34.33	PK2	38.7	-19.7	53.33	-	-	74	-20.67	303	101	H
* 12.06197	22.46	MAv1	38.7	-19.7	41.46	54	-12.54	-	-	303	101	H
* 3.5012	40.95	PK2	34.1	-29.6	45.45	-	-	74	-28.55	216	221	V
* 3.50329	28.71	MAv1	34.2	-29.6	33.31	54	-20.69	-	-	216	221	V
* 11.37414	33.07	PK2	38	-19.7	51.37	-	-	74	-22.63	243	397	V
* 11.37487	21.59	MAv1	38	-19.7	39.89	54	-14.11	-	-	243	397	V
2.9112	42.05	PK2	32.7	-22.2	52.55	-	-	-	-	149	137	V
2.91242	30.05	MAv1	32.7	-22.2	40.55	-	-	-	-	149	137	V

* - indicates frequency in CFR47 Pt 15

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL, CH 6 RESULTS

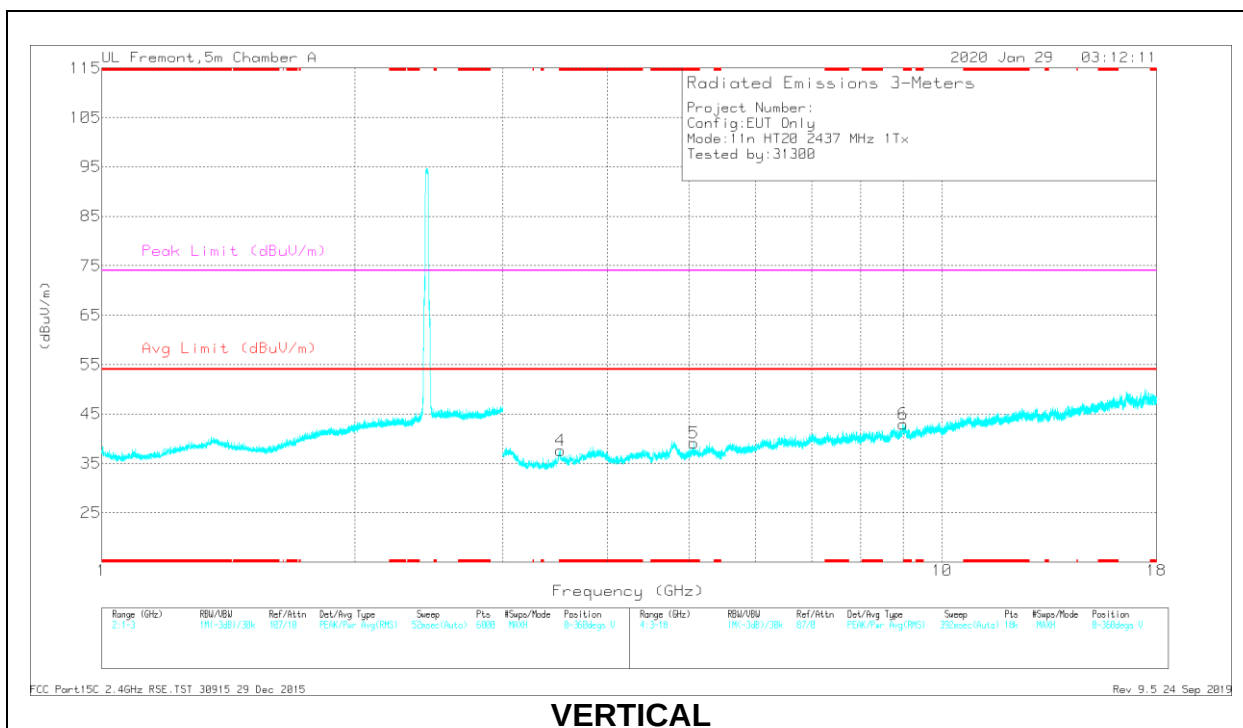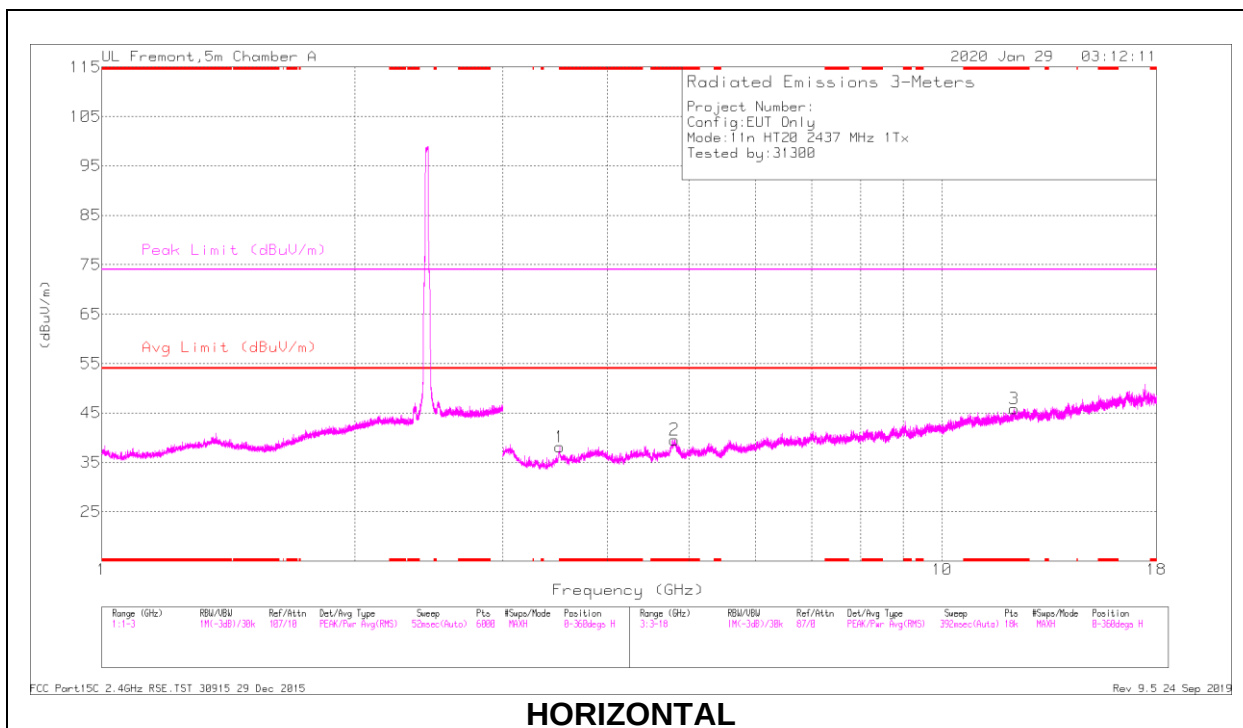

RADIATED EMISSIONS



Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.50887	40.48	PK2	33.8	-29.4	44.88	-	-	74	-29.12	6	103	H
* 3.50781	28.64	MAv1	33.9	-29.5	33.04	54	-20.96	-	-	6	103	H
* 4.80535	39.19	PK2	34.3	-27.5	45.99	-	-	74	-28.01	65	159	H
* 4.80675	27.81	MAv1	34.3	-27.5	34.61	54	-19.39	-	-	65	159	H
* 12.19061	35.01	PK2	38.9	-19.9	54.01	-	-	74	-19.99	179	101	H
* 12.18866	22.78	MAv1	38.9	-19.8	41.88	54	-12.12	-	-	179	101	H
* 3.51493	40.39	PK2	33.3	-29.3	44.39	-	-	74	-29.61	300	142	V
* 3.51544	27.78	MAv1	33.3	-29.3	31.78	54	-22.22	-	-	300	142	V
* 5.0627	37.31	PK2	34.4	-27.1	44.61	-	-	74	-29.39	314	133	V
* 5.063	25.68	MAv1	34.4	-27.1	32.98	54	-21.02	-	-	314	133	V
8.98587	22.72	MAv1	36.2	-21.3	37.62	-	-	-	-	46	173	V
8.98895	34.05	PK2	36.2	-21.3	48.95	-	-	-	-	46	173	V

* - indicates frequency in CFR47 Pt 15

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL, CH 13 RESULTS

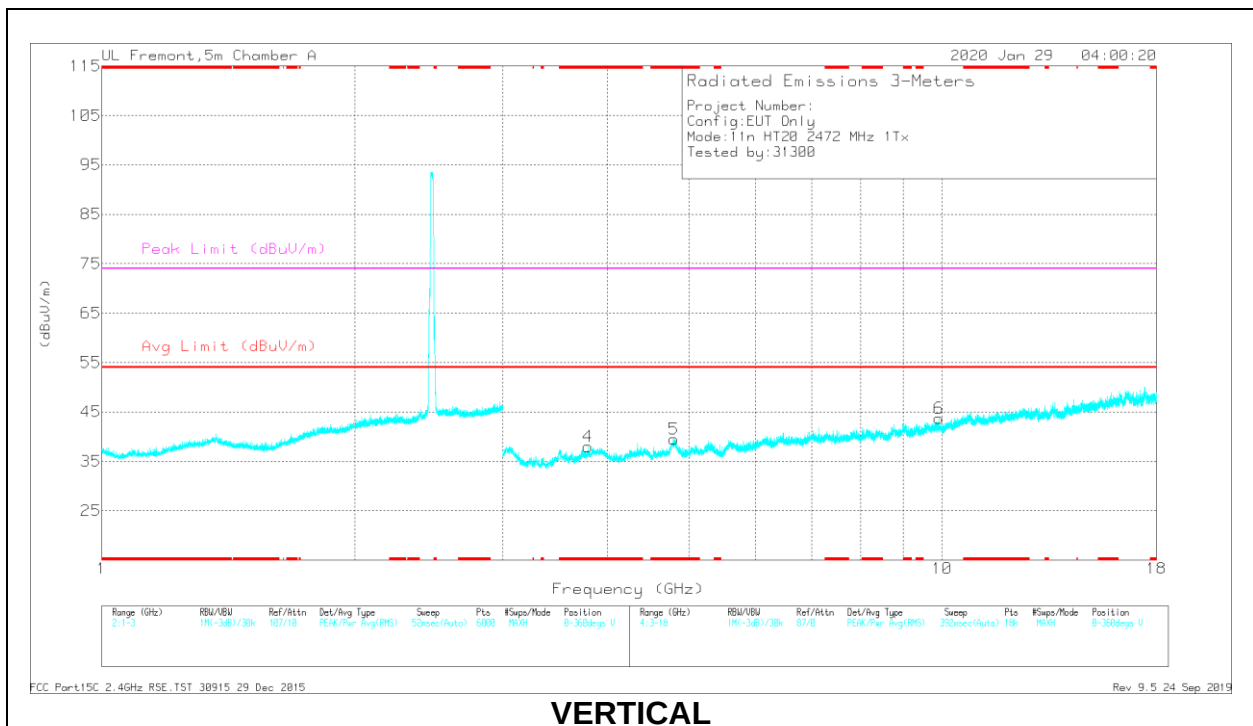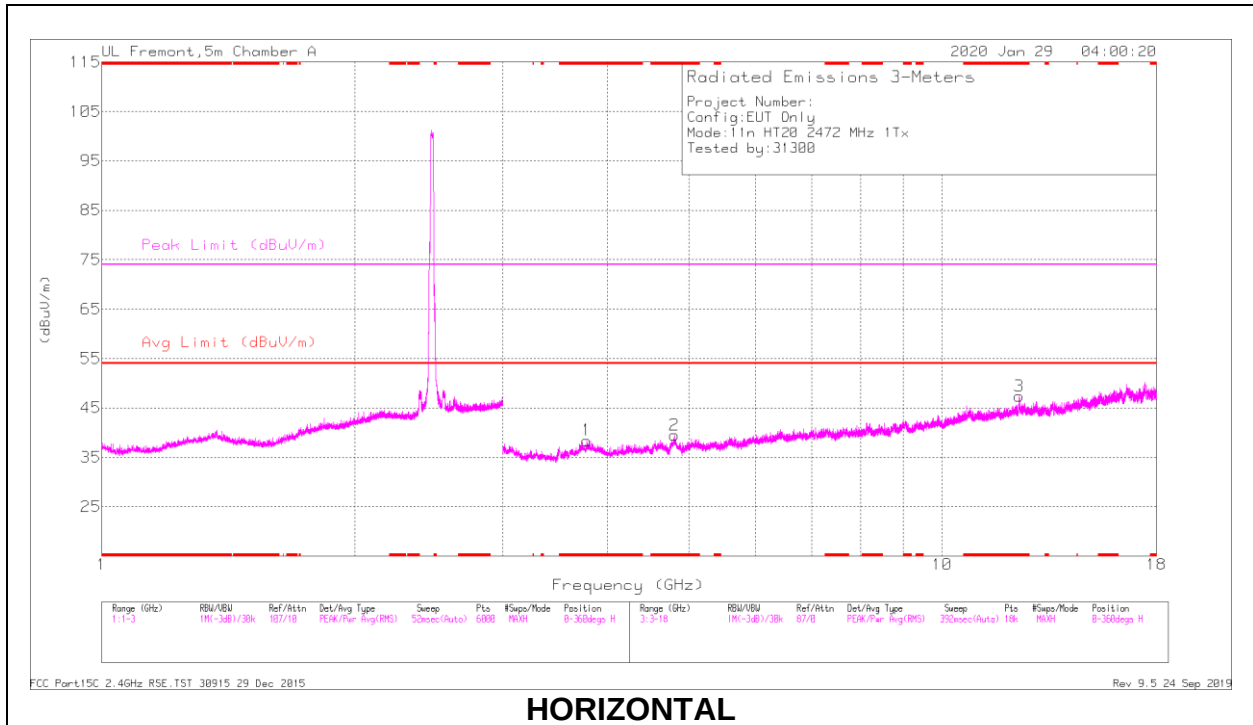

RADIATED EMISSIONS



Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Prod (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.7786	39.96	PK2	33.6	-29	44.56	-	-	74	-29.44	143	163	H
* 3.77948	27.87	MAv1	33.6	-29	32.47	54	-21.53	-	-	143	163	H
* 4.80109	39.65	PK2	34.3	-27.4	46.55	-	-	74	-27.45	359	209	H
* 4.80117	28.12	MAv1	34.3	-27.4	35.02	54	-18.98	-	-	359	209	H
* 12.36258	33.87	PK2	39	-19.9	52.97	-	-	74	-21.03	261	104	H
* 12.3603	22.17	MAv1	39	-19.9	41.27	54	-12.73	-	-	261	104	H
* 3.78669	39.66	PK2	33.6	-29	44.26	-	-	74	-29.74	94	195	V
* 3.79029	27.66	MAv1	33.6	-29	32.26	54	-21.74	-	-	94	195	V
* 4.79218	39.68	PK2	34.2	-27.4	46.48	-	-	74	-27.52	350	104	V
* 4.79483	28.21	MAv1	34.2	-27.4	35.01	54	-18.99	-	-	350	104	V
9.91062	21.68	MAv1	37	-20.7	37.98	-	-	-	-	149	138	V
9.91338	33.76	PK2	37	-20.7	50.06	-	-	-	-	149	138	V

* - indicates frequency in CFR47 Pt 15

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

10.2. WORST CASE BELOW 1 GHZ

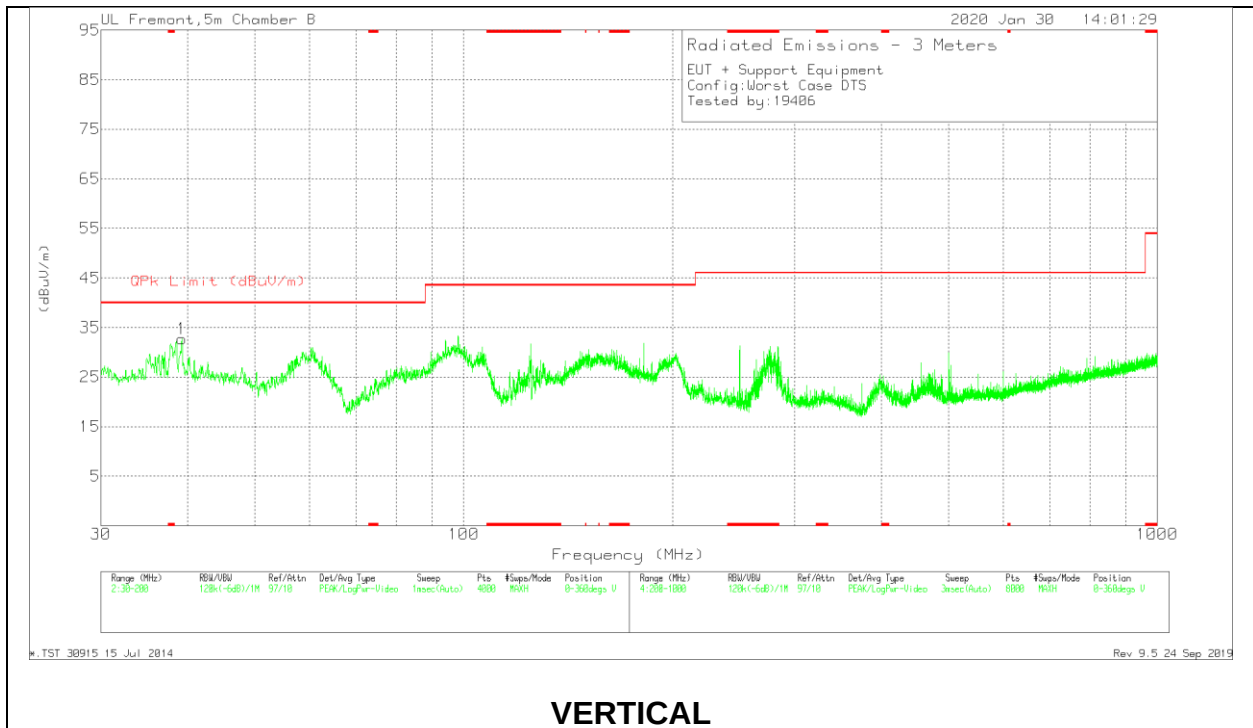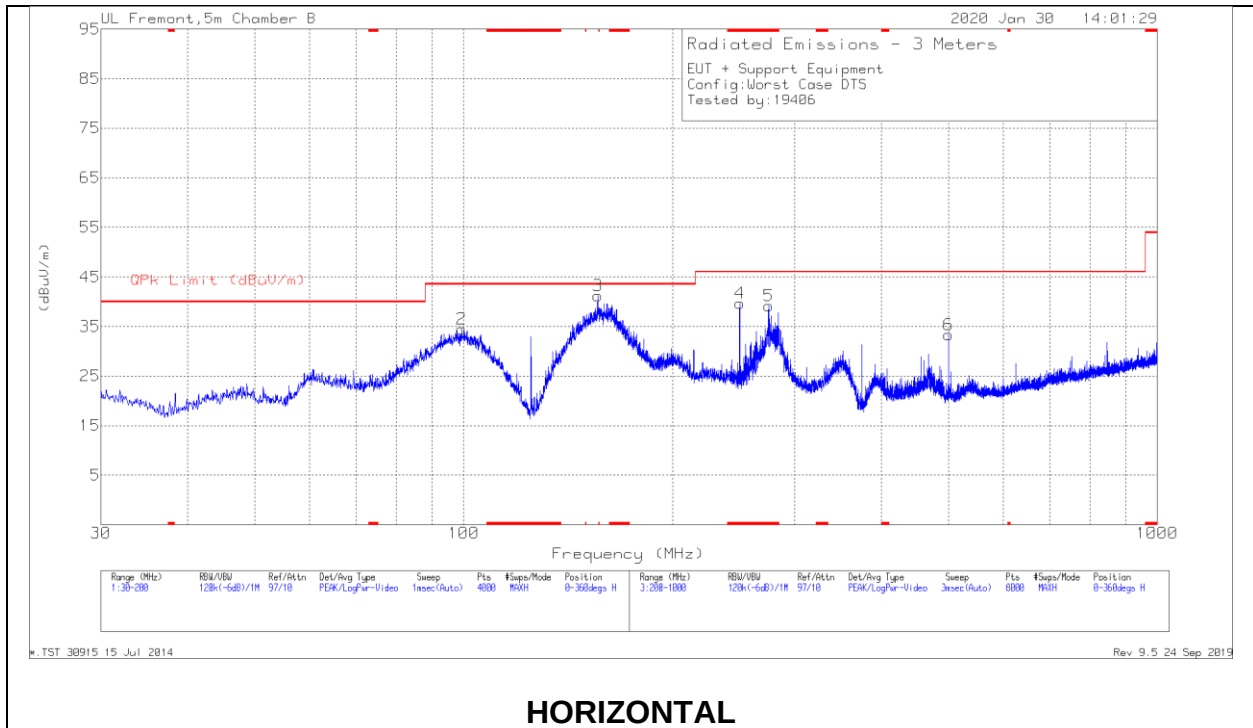

DATA



Radiated Emissions

Marker	Frequency (MHz)	Meter Reading (dBUV)	Det	AF T408 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBUV/m)	QPk Limit (dBUV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 249.9974	54.69	Qp	15.4	-29.8	40.29	46.02	-5.73	139	129	H
5	* 275.5138	37.42	Qp	17.3	-29.7	25.02	46.02	-21	265	393	H
1	39.126	33.03	Qp	18.6	-31.3	20.33	40	-19.67	274	215	V
2	99.0678	46.98	Qp	13.9	-30.8	30.08	43.52	-13.44	40	316	H
3	156.4665	49.79	Qp	16.4	-30.3	35.89	43.52	-7.63	288	185	H
6	499.9939	40.57	Qp	21.6	-29	33.17	46.02	-12.85	103	102	H

* - indicates frequency in CFR47 Pt 15
Qp - Quasi-Peak detector

*.TST 30915 15 Jul 2014
Rev 9.5 24 Sep 2019

10.3. WORST CASE 18-26 GHZ

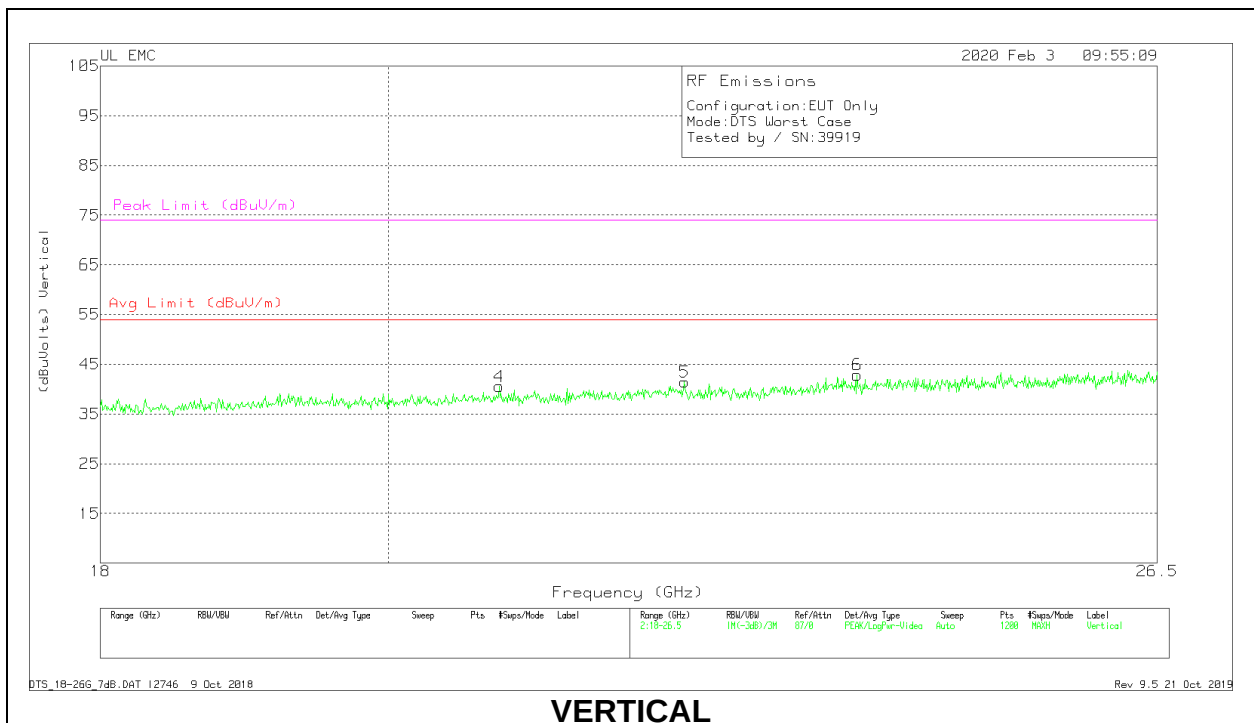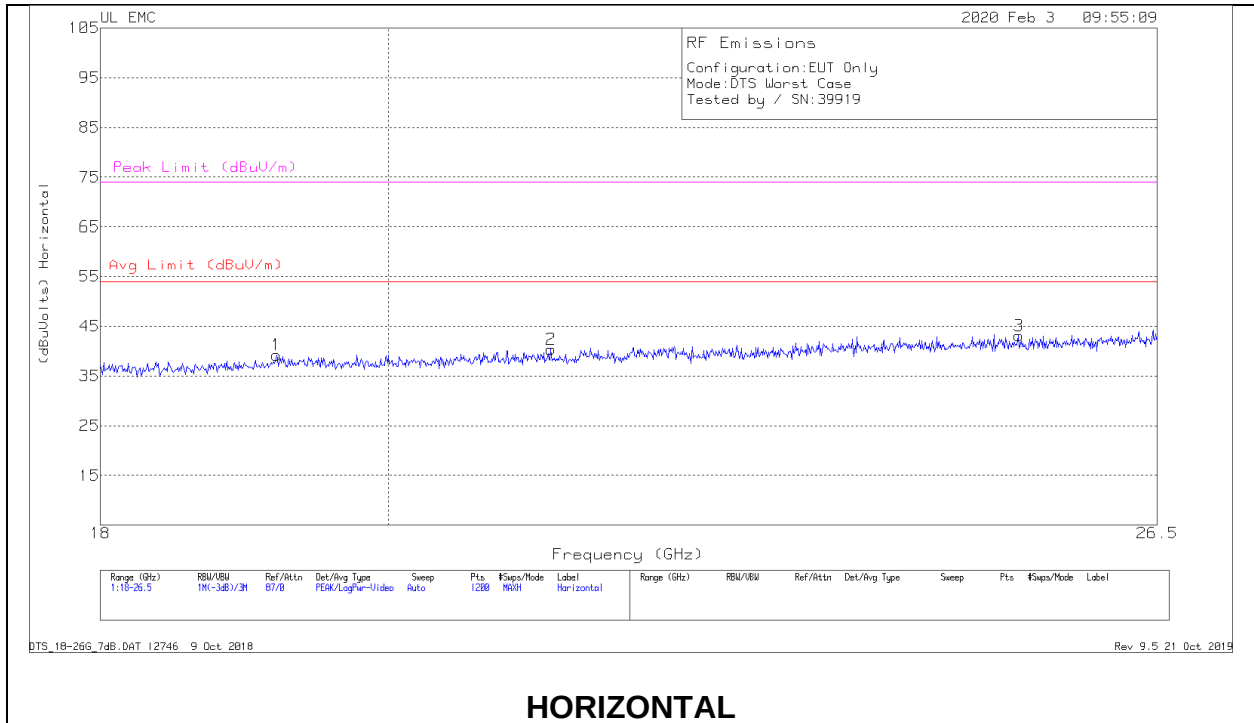

18 – 26GHz DATA

Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	T447 AF (dB/m)	Ampl/Cbl (dB)	Dist Corr (dB)	Corrected Reading (dBUVolts)	Avg Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)
1	19.19808	37.52	Pk	32.7	-21.5	-9.5	39.22	54	-14.78	74	-34.78
2	21.2256	38.09	Pk	33	-21.2	-9.5	40.39	54	-13.61	74	-33.61
3	25.18849	37.83	Pk	34.5	-19.7	-9.5	43.13	54	-10.87	74	-30.87
4	20.82861	38.36	Pk	33	-21.3	-9.5	40.56	54	-13.44	74	-33.44
5	22.28899	37.75	Pk	33.5	-20.3	-9.5	41.45	54	-12.55	74	-32.55
6	23.74229	37.86	Pk	34.1	-19.6	-9.5	42.86	54	-11.14	74	-31.14

Pk - Peak detector

DTS_18-26G_7dB.DAT 12746 9 Oct 2018
Rev 9.5 21 Oct 2019

11. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

11.1.1. AC Power Line Host

LINE 1 RESULTS

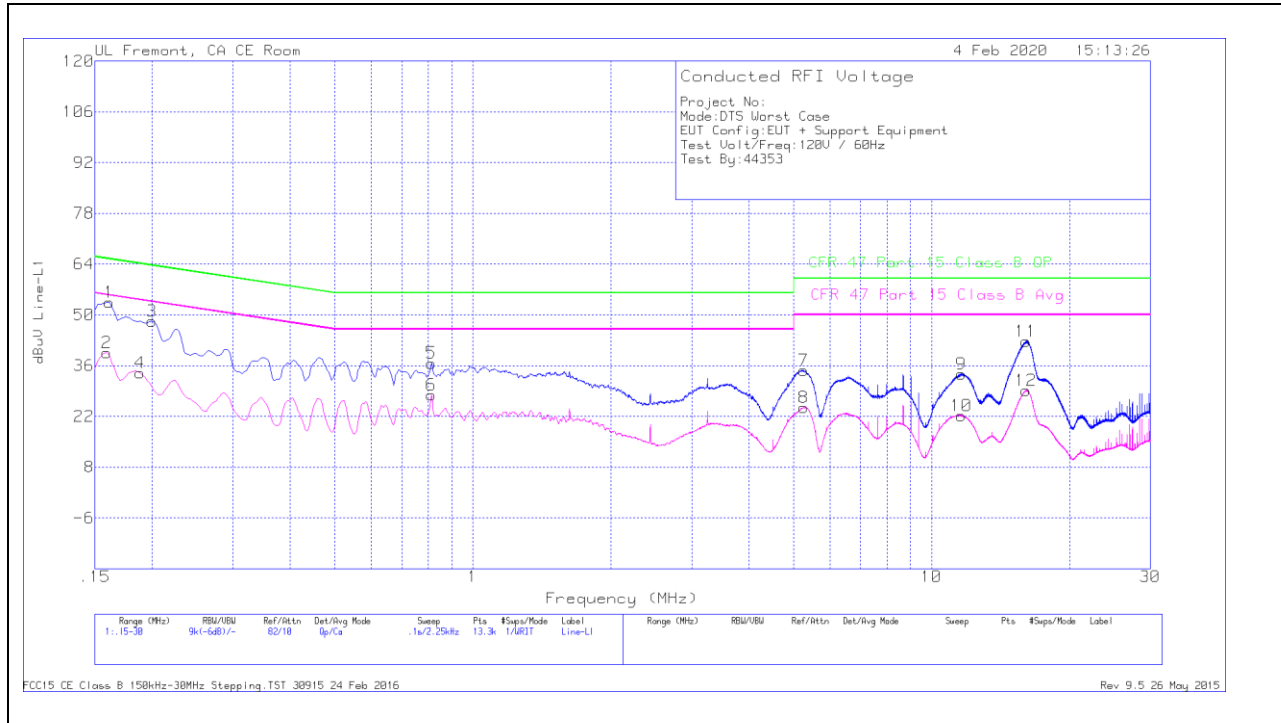


Range 1: Line-L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L1 (dB)	LC Cables C1&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
1	.16125	43.37	Qp	.1	0	10	53.47	65.4	-11.93	-	-
2	.159	29.46	Ca	.1	0	10	39.56	-	-	55.52	-15.96
3	.1995	38.24	Qp	0	0	10	48.24	63.63	-15.39	-	-
4	.18825	24.05	Ca	0	0	10	34.05	-	-	54.11	-20.06
5	.8115	26.7	Qp	0	0	10	36.7	56	-19.3	-	-
6	.8115	17.85	Ca	0	0	10	27.85	-	-	46	-18.15
7	5.25975	24.54	Qp	0	.1	10.1	34.74	60	-25.26	-	-
8	5.25863	14.29	Ca	0	.1	10.1	24.49	-	-	50	-25.51
9	11.60025	23.36	Qp	0	.2	10.1	33.66	60	-26.34	-	-
10	11.60925	11.95	Ca	0	.2	10.1	22.25	-	-	50	-27.75
11	16.053	32.26	Qp	0	.3	10.2	42.76	60	-17.24	-	-
12	16.05413	18.62	Ca	0	.3	10.2	29.12	-	-	50	-20.88

Qp - Quasi-Peak detector

Ca - CISPR average detection

LINE 2 RESULTS

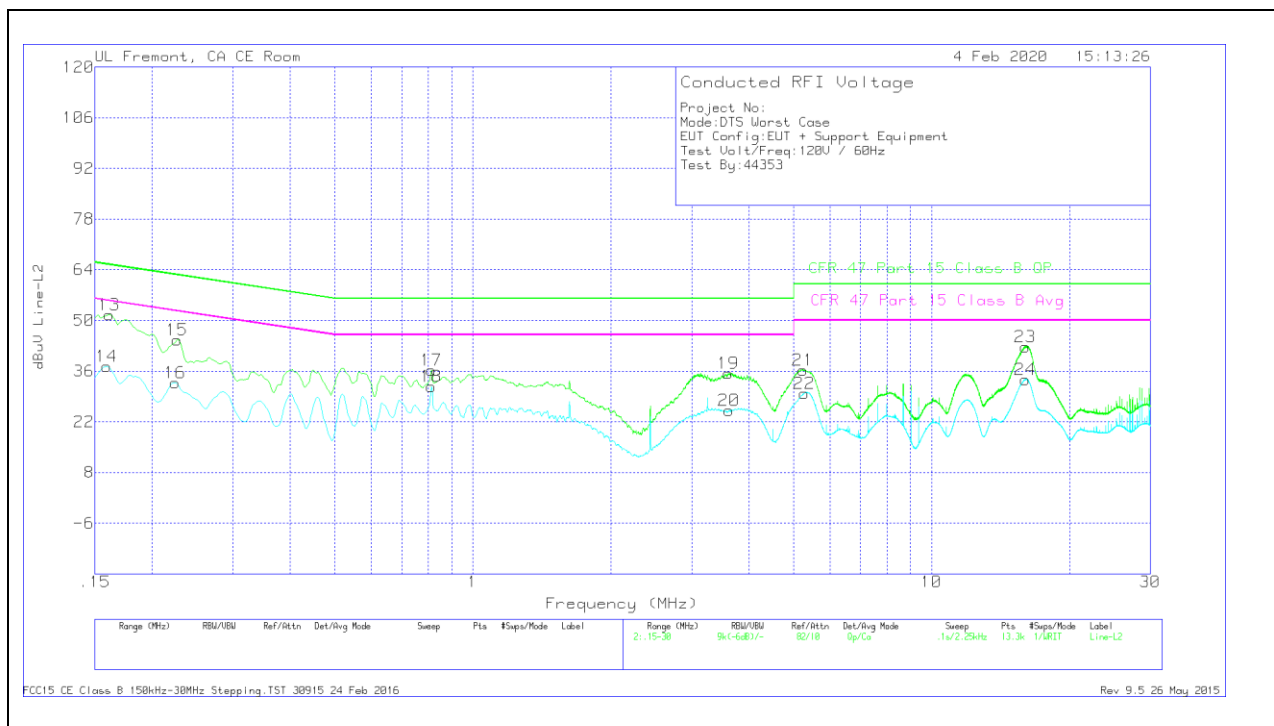

Range 2: Line-L2 .15 - 30MHz


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L2 (dB)	LC Cables C2&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
13	.16125	41.64	Qp	0	0	10	51.64	65.4	-13.76	-	-
14	.159	27.17	Ca	.1	0	10	37.27	-	-	55.52	-18.25
15	.2265	34.62	Qp	0	0	10	44.62	62.58	-17.96	-	-
16	.22425	22.79	Ca	0	0	10	32.79	-	-	52.66	-19.87
17	.8115	26.26	Qp	0	0	10	36.26	56	-19.74	-	-
18	.8115	21.79	Ca	0	0	10	31.79	-	-	46	-14.21
19	3.60825	25.34	Qp	0	.1	10	35.44	56	-20.56	-	-
20	3.61275	14.97	Ca	0	.1	10	25.07	-	-	46	-20.93
21	5.253	26.12	Qp	0	.1	10.1	36.32	60	-23.68	-	-
22	5.2755	19.69	Ca	0	.1	10.1	29.89	-	-	50	-20.11
23	16.0215	32.23	Qp	0	.3	10.2	42.73	60	-17.27	-	-
24	16.01025	23.17	Ca	0	.3	10.2	33.67	-	-	50	-16.33

Qp - Quasi-Peak detector

Ca - CISPR average detection

11.1.2. AC Power Line Norm

LINE 1 RESULTS

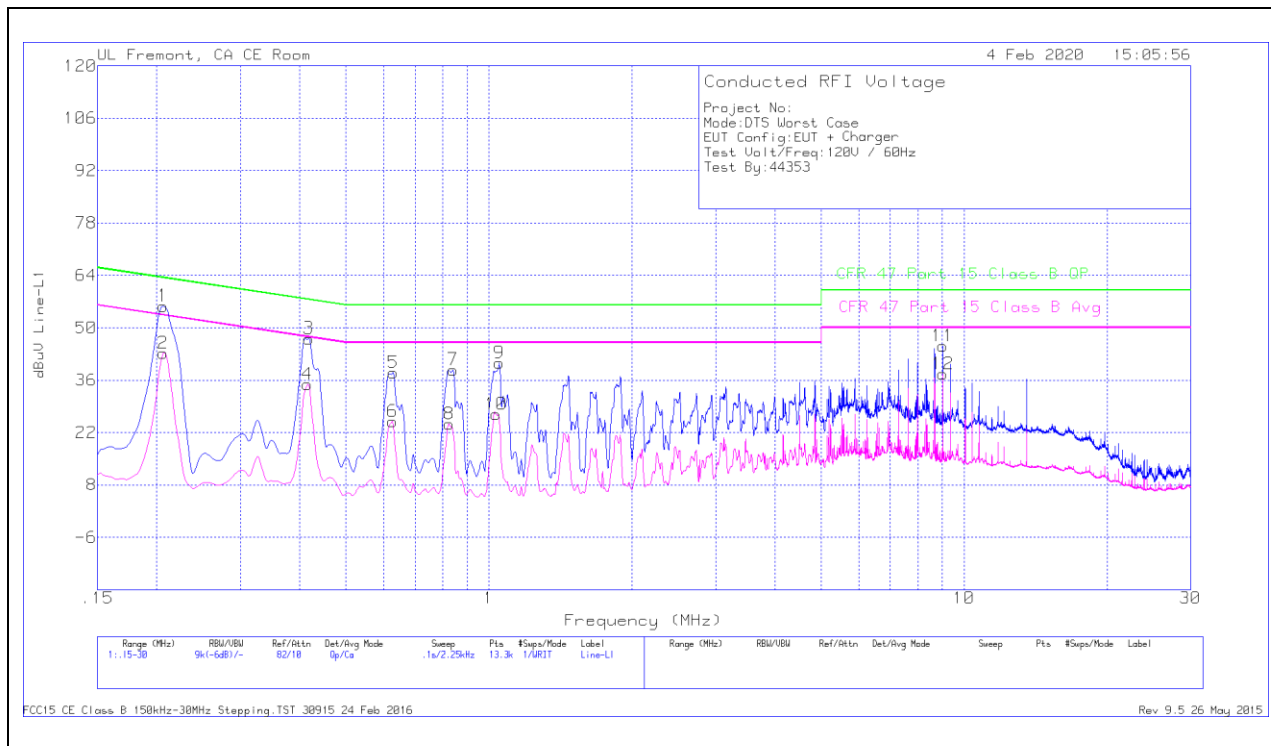


Range 1: Line-L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L1 (dB)	LC Cables C1&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
1	.20625	45.82	Qp	0	0	10	55.82	63.35	-7.53	-	-
2	.20625	33.28	Ca	0	0	10	43.28	-	-	53.35	-10.07
3	.41775	37.13	Qp	0	0	10	47.13	57.49	-10.36	-	-
4	.4155	24.87	Ca	0	0	10	34.87	-	-	47.54	-12.67
5	.62925	28.02	Qp	0	0	10	38.02	56	-17.98	-	-
6	.627	14.92	Ca	0	0	10	24.92	-	-	46	-21.08
7	.84075	28.78	Qp	0	0	10	38.78	56	-17.22	-	-
8	.825	14.26	Ca	0	0	10	24.26	-	-	46	-21.74
9	1.05225	30.5	Qp	0	.1	10	40.6	56	-15.4	-	-
10	1.0365	16.71	Ca	0	.1	10	26.81	-	-	46	-19.19
11	9.0195	34.84	Qp	0	.2	10.1	45.14	60	-14.86	-	-
12	9.0195	27.33	Ca	0	.2	10.1	37.63	-	-	50	-12.37

Qp - Quasi-Peak detector

Ca - CISPR average detection

LINE 2 RESULTS

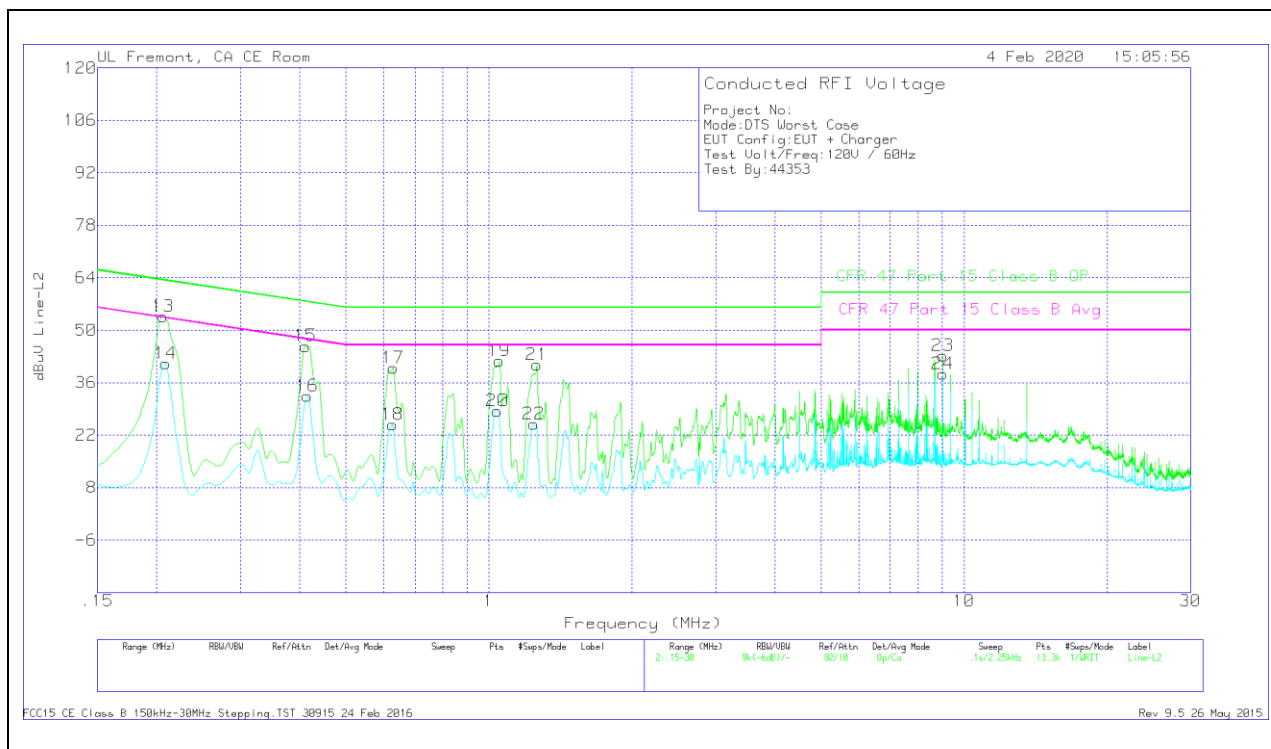

Range 2: Line-L2 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L2 (dB)	LC Cables C2&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR)Margin (dB)
13	.20625	43.61	Qp	0	0	10	53.61	63.35	-9.74	-	-
14	.2085	31.12	Ca	0	0	10	41.12	-	-	53.26	-12.14
15	.411	35.74	Qp	0	0	10	45.74	57.63	-11.89	-	-
16	.4155	22.45	Ca	0	0	10	32.45	-	-	47.54	-15.09
17	.62925	29.88	Qp	0	0	10	39.88	56	-16.12	-	-
18	.627	14.78	Ca	0	0	10	24.78	-	-	46	-21.22
19	1.05225	31.78	Qp	0	.1	10	41.88	56	-14.12	-	-
20	1.04325	18.3	Ca	0	.1	10	28.4	-	-	46	-17.6
21	1.2615	30.65	Qp	0	.1	10	40.75	56	-15.25	-	-
22	1.2435	14.84	Ca	0	.1	10	24.94	-	-	46	-21.06
23	9.0195	32.95	Qp	0	.2	10.1	43.25	60	-16.75	-	-
24	9.0195	28.05	Ca	0	.2	10.1	38.35	-	-	50	-11.65

Qp - Quasi-Peak detector

Ca - CISPR average detection

12. SETUP PHOTOS

Please refer to 13019133-EP1V1 FCC IC Setup_Photos for setup photos

END OF TEST REPORT