



## MEASUREMENT REPORT GSM / GPRS / EDGE/ WCDMA

**Applicant Name:**

Apple Inc.  
One Apple Park Way  
Cupertino, CA 95014  
United States

**Date of Testing:**

07/16/2020 - 09/09/2020

**Test Site/Location:**

PCTEST Lab. Morgan Hill, CA, USA

**Test Report Serial No.:**

1C2004270029-02-R1.BCG

<b>FCC ID:</b>	<b>BCGA2324</b>
<b>IC:</b>	<b>579C-A2324</b>
<b>APPLICANT:</b>	<b>Apple Inc.</b>

**Application Type:**

Certification

**Model/HVIN:**

A2324

**EUT Type:**

Tablet Device

**FCC Classification:**

PCS Licensed Transmitter (PCB)

**FCC Rule Part(s):**

22, 24, & 27

**ISED Specification:**

RSS-132, RSS-133, RSS-139

**Test Procedure(s):**

ANSI C63.26-2015, TIA-603-E-2016, KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1C2004270029-02-R1.FCC Report SNs) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez  
President




FCC ID: BCGA2324	<b>PCTEST<sup>®</sup></b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device		Page 1 of 111

## T A B L E   O F   C O N T E N T S

---


1.0	INTRODUCTION .....	4
1.1	Scope .....	4
1.2	PCTEST Test Location .....	4
1.3	Test Facility / Accreditations .....	4
2.0	PRODUCT INFORMATION .....	5
2.1	Equipment Description .....	5
2.2	Device Capabilities .....	5
2.3	Antenna Description .....	5
2.4	Test Support Equipment .....	6
2.5	Test Configuration .....	6
2.6	Software and Firmware .....	6
2.7	EMI Suppression Device(s)/Modifications .....	6
3.0	DESCRIPTION OF TESTS .....	7
3.1	Evaluation Procedure .....	7
3.2	Radiated Measurements .....	7
4.0	MEASUREMENT UNCERTAINTY .....	8
5.0	TEST EQUIPMENT CALIBRATION DATA .....	9
6.0	SAMPLE CALCULATIONS .....	10
7.0	TEST RESULTS .....	11
7.1	Summary .....	11
7.2	Occupied Bandwidth .....	12
7.3	Spurious and Harmonic Emissions at Antenna Terminal .....	17
7.4	Band Edge Emissions at Antenna Terminal .....	43
7.5	Peak-Average Ratio .....	52
7.6	Radiated Power (ERP/EIRP) .....	57
7.7	Radiated Spurious Emissions .....	63
7.8	Frequency Stability / Temperature Variation .....	100
8.0	CONCLUSION .....	111

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device		Page 2 of 111



## MEASUREMENT REPORT

### GSM / GPRS / EDGE / WCDMA



Mode	FCC Rule Part	Tx Frequency (MHz)	ERP		EIRP		Emission Designator
			Max. Power (W)	Max. Power (dBm)	Max. Power (W)	Max. Power (dBm)	
GPRS850	22H	824.2 - 848.8	0.847	29.28	1.390	31.43	248KGXW
EDGE850	22H	824.2 - 848.8	0.239	23.79	0.393	25.94	248KG7W
WCDMA850	22H	826.4 - 846.6	0.151	21.80	0.248	23.95	4M10F9W
WCDMA1700	27	1712.4 - 1752.6			0.323	25.09	4M08F9W
GPRS1900	24E	1850.2 - 1909.8			1.416	31.51	245KGXW
EDGE1900	24E	1850.2 - 1909.8			0.380	25.80	244KG7W
WCDMA1900	24E	1852.4 - 1907.6			0.339	25.30	4M10F9W

#### EUT Overview

FCC ID: BCGA2324	 <b>PCTEST<sup>®</sup></b> Proud to be part of element			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device			

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

### 1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Morgan Hill, CA 95037, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: BCGA2324	 <b>PCTEST</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 4 of 111	

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA2324**. The test data contained in this report pertains only to the emissions due to the EUT's 2G/3G licensed transmitters.

**Test Device Serial No.:** DLXD101FQ8MX, DLXD100MQ8MX, DLX018400MYPWT71Q, DLX019300F7PWTJ1L

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE, HDR4, HDR8), WPT

This device supports BT Beamforming

This device supports simultaneous transmission operations, which allows for multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

Antenna	Simultaneous Tx Config	WLAN	Bluetooth	LTE / GSM / WCDMA	UNII
		802.11 b/g/n/ax	BDR, EDR, HDR4/8, LE	Mid band/ High band	802.11 a/n/ax
1a	Config 1	✓	✗	✓	✗
	Config 2	✗	✓	✓	✗
2a	Config 3	✗	✗	✓	✓
3a	Config 4	✓	✗	✓	✗
	Config 5	✗	✓	✓	✗

**Table 2-1. Simultaneous Transmission Configurations**

✓ = Support; ✗ = Not Support

**Note:**

All the above simultaneous transmission configurations have been tested and the worst case configuration was found to be config 2 and reported in BTLE and LTE test reports.

### 2.3 Antenna Description

Following antennas were used for the testing.

Frequency [MHz]	Antennas Gains (dBi)				
	Antenna 4	Antenna 3b	Antenna 2a	Antenna 1a	Antenna 3a
820-960	-1.5	-1.6	N/A	N/A	N/A
1700-1800	0.6	N/A	-2.0	0.5	-3.1
1820-2100	-0.2	N/A	-1.2	0.8	-4.1

**Table 2-2. Highest Antenna Gain**

FCC ID: BCGA2324	 <b>PCTEST®</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device			

## 2.4 Test Support Equipment

Test Support Equipment List					
1	Apple MacBook w/AC/DC Adapter	Model: A1398 Model: A1435	S/N: C2QKP008F6F3 S/N: N/A		
2	Apple USB-C Cable	Model: Chimp	S/N: 420A57		
3	USB-C Cable w/ AC Adapter	Model: A146 Model: A2305	S/N: N/A S/N: N/A		
4	Apple Pencil	Model: N/A	S/N: GQXYGSXRJKM9		
5	DC Power Supply	Model: KPS3010D	S/N: N/A		

**Table 2-3. Test Support Equipment List**

## 2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.26-2015, TIA-603-E-2016, and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

## 2.6 Software and Firmware

The test was conducted with firmware version 18A325 installed on the EUT.

## 2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: BCGA2324	 <b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 6 of 111	

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the "Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards" (ANSI C63.26-2015/TIA-603-E-2016) and "Measurement Guidance for Certification of Licensed Digital Transmitters" (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

**Deviation from Measurement Procedure.....**None

### 3.2 Radiated Measurements

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Per the guidelines of KDB 412172 D01 v01r01, radiated power levels are measured using the following formula:

$$\text{ERP or EIRP} = P_T + G_T - L_c$$

Where  $P_T$  is the transmitter output power, expressed in dBm,  $G_T$  is the gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP), and  $L_c$  signal attenuation in the connecting cable between the transmitter and antenna in dB.

Per the guidance of ANSI C63.26-2015 and TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [\text{dBm}] = P_g [\text{dBm}] - \text{cable loss} [\text{dB}] + \text{antenna gain} [\text{dBd/dBi}]$$

Where,  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g [\text{dBm}] - \text{cable loss} [\text{dB}]$ . The calculated  $P_d$  levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of  $43 + 10 \log_{10}(\text{Power} [\text{Watts}])$ .

Per KDB 414788 D01 v01r01, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

Radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015 and TIA-603-E-2016.

FCC ID: BCGA2324	 <b>PCTEST<sup>®</sup></b> Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device		Page 7 of 111

## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.30
Radiated Disturbance (<1GHz)	4.15
Radiated Disturbance (>1GHz)	4.59
Radiated Disturbance (>18GHz)	4.96

FCC ID: BCGA2324	 <b>PCTEST<sup>®</sup></b> Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 8 of 111	

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	3/4/2020	Annual	3/4/2021	MY49430244
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	10/29/2019	Annual	10/29/2020	T058701-02
ESPEC	SU-241	Tabletop Temperature Chamber	9/3/2019	Annual	9/3/2020	92009574
ETS-Lindgren	3142E-PA	Pre-Amplifier (30MHz - 6GHz)	9/19/2019	Annual	9/19/2020	213236
ETS-Lindgren	3142E	BiConiLog Antenna (30MHz - 6GHz)	1/6/2020	Annual	1/6/2021	224569
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	4/21/2020	Annual	4/21/2021	205956
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	3/2/2020	Annual	3/2/2021	101619
Rohde & Schwarz	ESW26	EMI Test Receiver	6/1/2020	Annual	6/1/2021	101299
Rohde & Schwarz	ESW44	EMI Test Receiver	9/13/2019	Annual	9/13/2020	101570
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	11/16/2019	Annual	11/16/2020	164715
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	4/16/2020	Annual	4/16/2021	166869
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	9/19/2019	Annual	9/19/2020	100051
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Antenna (400MHz-18GHz)	11/14/2019	Annual	11/14/2020	101057
Rohde & Schwarz	HFH2-Z2	Loop Antenna	3/12/2020	Annual	3/12/2021	100546

**Table 5-1. Test Equipment List**

**Notes:**

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCGA2324	 <b>PCTEST<sup>®</sup></b> Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 9 of 111	

## 6.0 SAMPLE CALCULATIONS

### GPRS Emission Designator

**Emission Designator = 250KGXW**

GPRS BW = 250 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

### EDGE Emission Designator

**Emission Designator = 250KG7W**

EDGE BW = 250 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

### WCDMA Emission Designator

**Emission Designator = 4M16F9W**

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

### Spurious Radiated Emission

#### **Example: Spurious emission at 3700.40 MHz**

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was  $-81.0$  dBm. The gain of the substituted antenna is  $8.1$  dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0$  dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is  $2.0$  dB at  $3700.40$  MHz. So  $6.1$  dB is added to the signal generator reading of  $-30.9$  dBm yielding  $-24.80$  dBm. The fundamental EIRP was  $25.50$  dBm so this harmonic was  $25.50$  dBm  $- (-24.80) = 50.3$  dBc.

FCC ID: BCGA2324	 <b>PCTEST<sup>®</sup></b> Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device		Page 10 of 111

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: Apple Inc.  
 FCC ID: BCGA2324  
 FCC Classification: PCS Licensed Transmitter (PCB)  
 Mode(s): GSM / GPRS / EDGE / WCDMA

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	RSS-Gen (6.7) RSS-133(2.3)	Occupied Bandwidth	N/A	CONDUCTED	N/A	Section 7.2
2.1051 22.917(a) 24.238(a) 27.53(h)	RSS-132(5.5) RSS-133(6.5) RSS-139(6.6)	Conducted Band Edge / Spurious Emissions	> 43 + 10 log <sub>10</sub> (P[Watts]) at Band Edge and for all out-of-band emissions		PASS	Sections 7.3, 7.4
24.232(d)	RSS-132(5.4) RSS-133(6.4) RSS-139(6.5)	Peak-Average Ratio	< 13 dB		PASS	Section 7.5
2.1046	RSS-132(5.4) RSS-133(4.1) RSS-139(4.1)	Transmitter Conducted Output Power	N/A		PASS	See RF Exposure Report
22.913(a)(5)	RSS-132(5.4)	Effective Radiated Power	< 7 Watts max. ERP		PASS	Section 7.6
24.232(c)	RSS-133(6.4)	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS	Section 7.6
27.50(d)(4)	RSS-139(6.5)	Equivalent Isotropic Radiated Power	< 1 Watts max. EIRP		PASS	Section 7.6
2.1053 22.917(a) 24.238(a) 27.53(h)	RSS-132(5.5) RSS-133(6.5) RSS-139(6.6)	Radiated Spurious Emissions	> 43 + 10 log <sub>10</sub> (P[Watts]) for all out-of-band emissions	RADIATED	PASS	Section 7.7
2.1055 22.355 24.235 27.54	RSS-132(5.3) RSS-133(6.3) RSS-139(6.4)	Frequency Stability	< 2.5 ppm (Part 22) Emission must remain in band (Part 24, 27)	CONDUCTED	PASS	Section 7.8

Table 7-1. Summary of Test Results

#### Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "2G/3G Automation," Version 4.2.
- 5) All ports were investigated and for some test cases only the worst case data was reported.

FCC ID: BCGA2324	 <b>PCTEST<sup>®</sup></b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 11 of 111

## 7.2 Occupied Bandwidth

### Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 4.2

### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

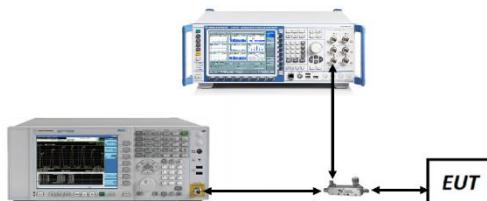

**Figure 7-1. Test Instrument & Measurement Setup**

### Test Notes

All ports were tested and only the worse case data were reported.

FCC ID: BCGA2324	 <b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device		Page 12 of 111

Mode	Occupied Bandwidth [kHz]
GPRS850	247.93
EDGE850	247.97
WCDMA850	4101.70
WCDMA1700	4084.80
GPRS1900	245.13
EDGE1900	243.68
WCDMA1900	4102.90

**Table 7-2. Occupied Band Width Results**



**Plot 7-1. Occupied Bandwidth Plot (Cellular GPRS Mode)**

FCC ID: BCGA2324	<b>PCTEST</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 13 of 111	



Plot 7-2. Occupied Bandwidth Plot (EDGE850 Mode)




Plot 7-3. Occupied Bandwidth Plot (PCS GPRS Mode)

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 14 of 111	



Plot 7-4. Occupied Bandwidth Plot (EDGE1900 Mode)

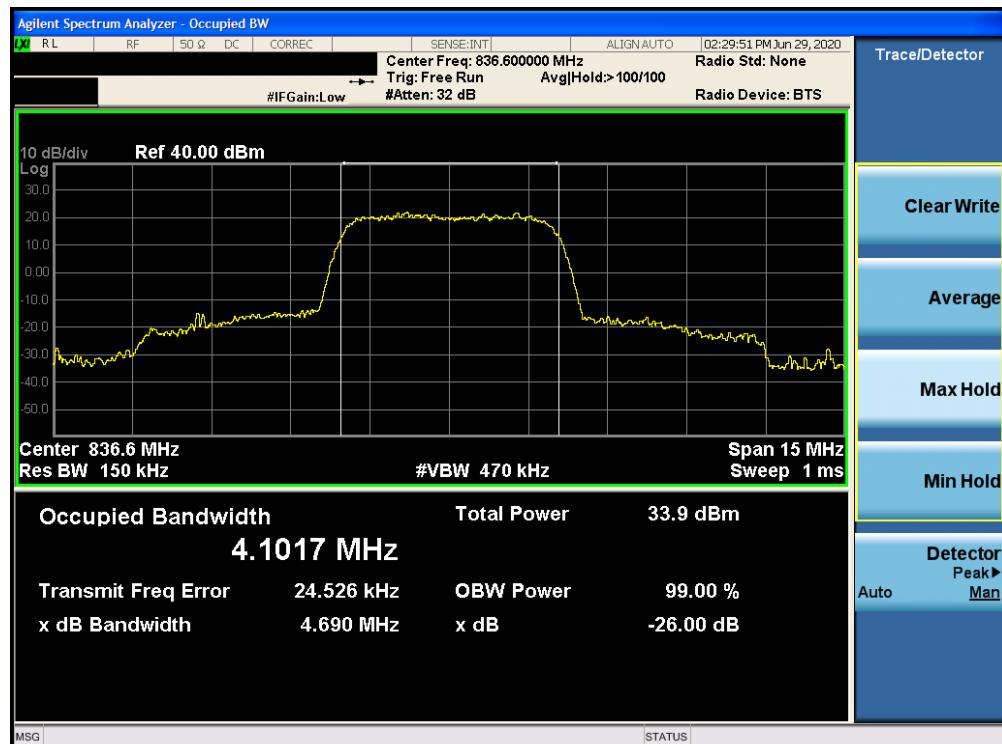


Plot 7-5. Occupied Bandwidth Plot (Cellular WCDMA Mode)

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 15 of 111	



Plot 7-6. Occupied Bandwidth Plot (AWS WCDMA Mode)

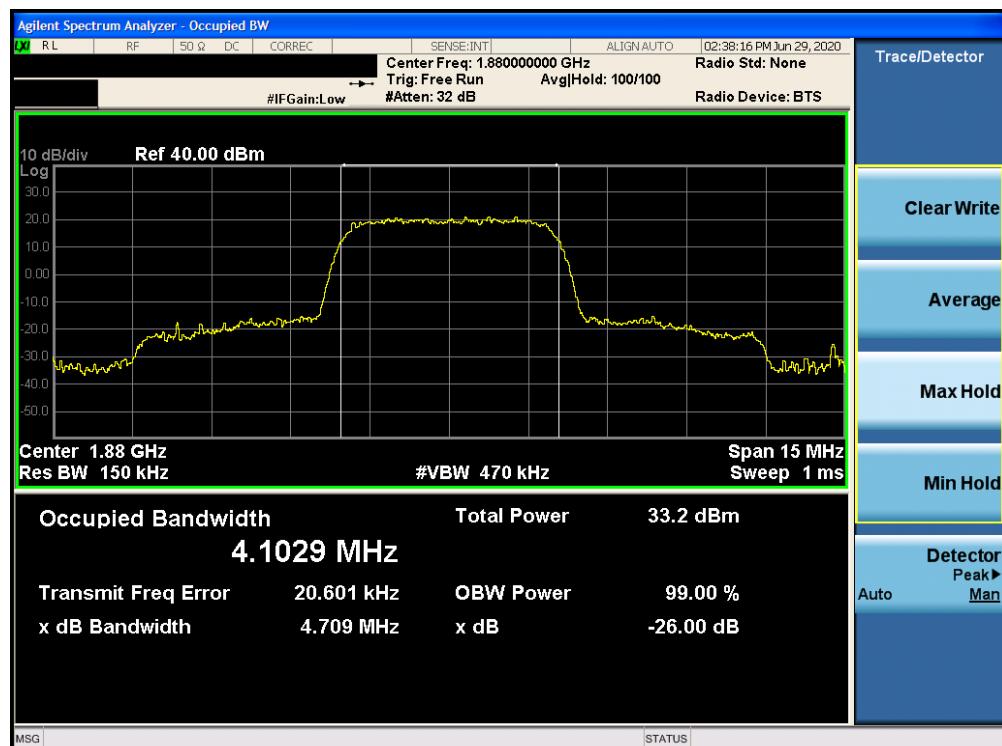

Plot 7-7. Occupied Bandwidth Plot (PCS WCDMA Mode)

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 16 of 111	

## 7.3 Spurious and Harmonic Emissions at Antenna Terminal

### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

***The minimum permissible attenuation level of any spurious emission is  $43 + 10\log_{10}(P_{[Watts]})$ , where P is the transmitter power in Watts.***

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 6.0

### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz for Cell, 20GHz for AWS, 20GHz for PCS (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

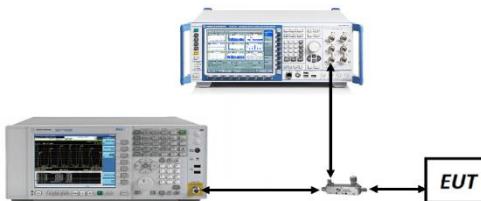


**Figure 7-2. Test Instrument & Measurement Setup**

### Test Notes


1. Per 24.238(b), 27.53(h)(3), and RSS-133(6.5), RSS-139(6.5), compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 1MHz, and 100 kHz or greater for Part 22 and RSS-132 measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
2. All ports were tested and only the worse case data were reported.

FCC ID: BCGA2324	 <b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device		Page 17 of 111

## Cellular GPRS Mode

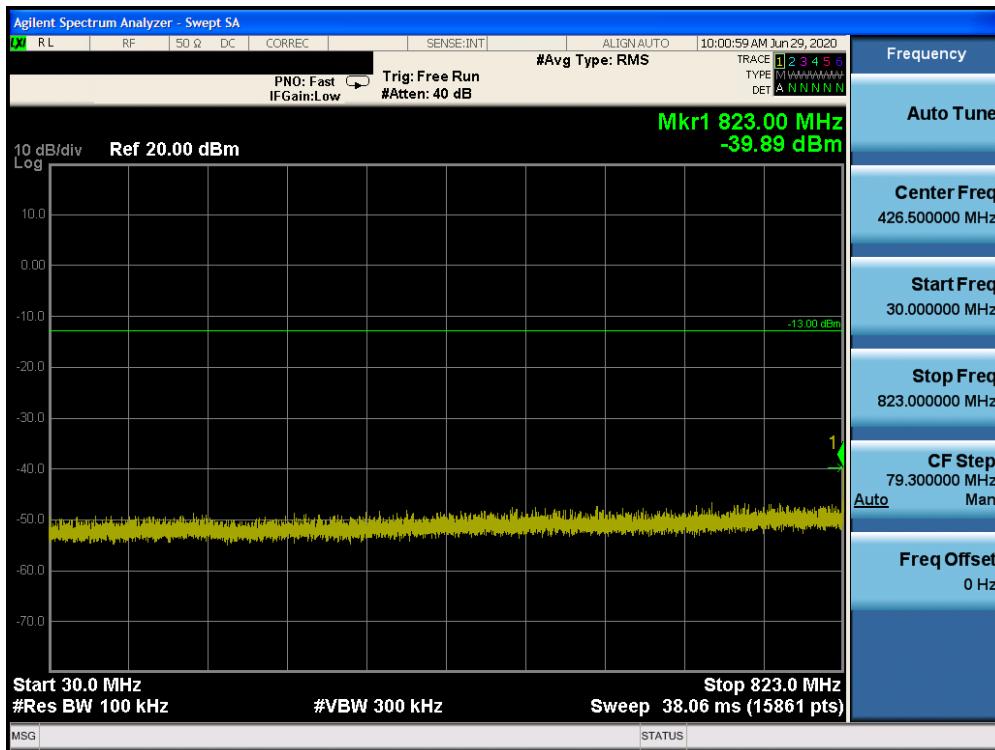


Plot 7-8. Conducted Spurious Plot (Cellular GPRS Mode - Low Channel)

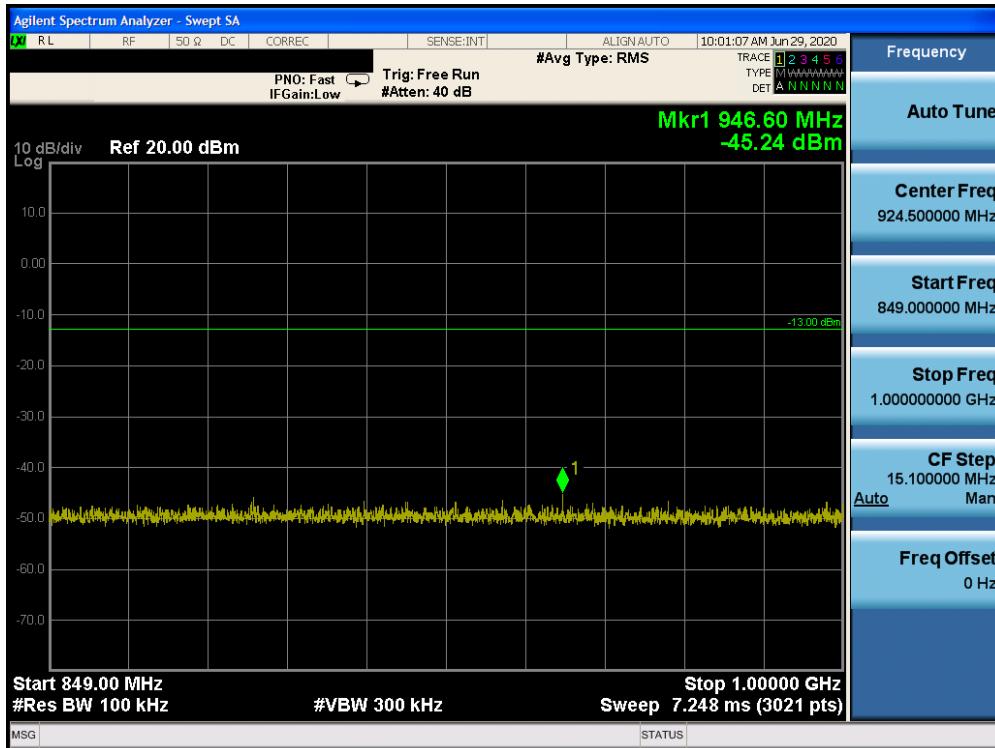


Plot 7-9. Conducted Spurious Plot (Cellular GPRS Mode - Low Channel)

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 18 of 111	

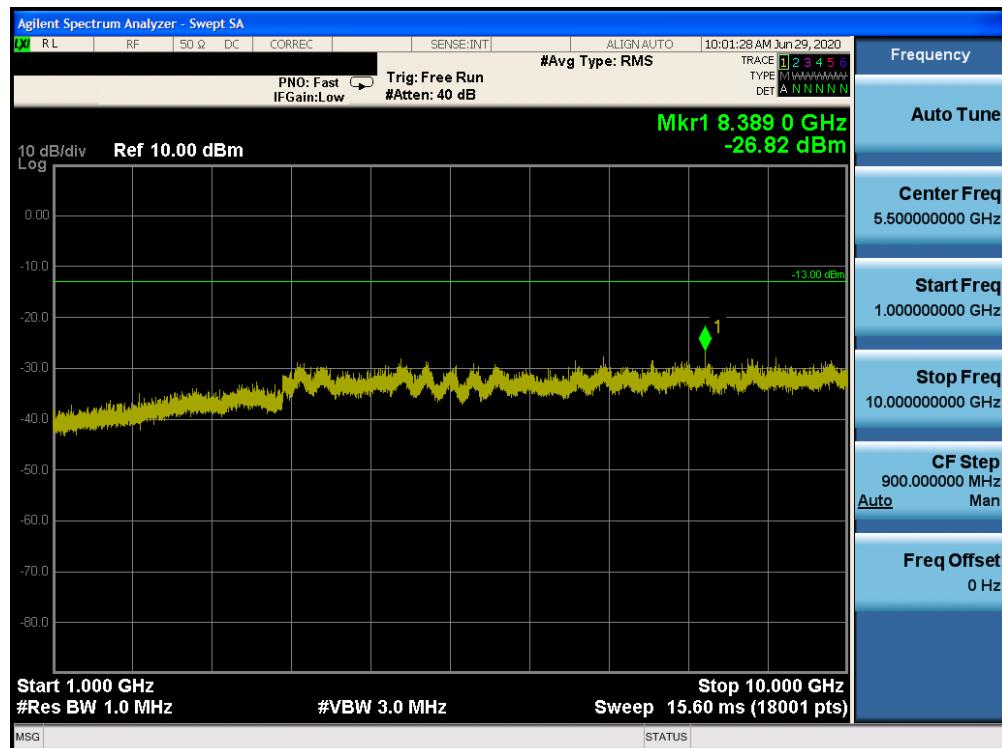


Plot 7-10. Conducted Spurious Plot (Cellular GPRS Mode - Low Channel)

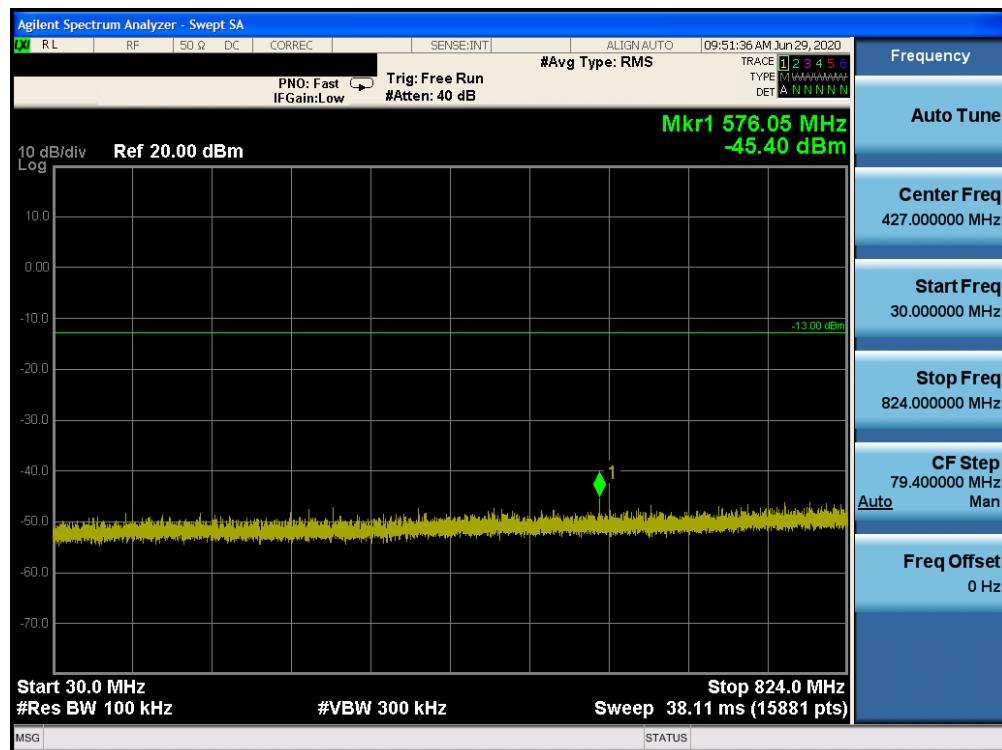


Plot 7-11. Conducted Spurious Plot (Cellular GPRS Mode - Mid Channel)

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device		Page 19 of 111

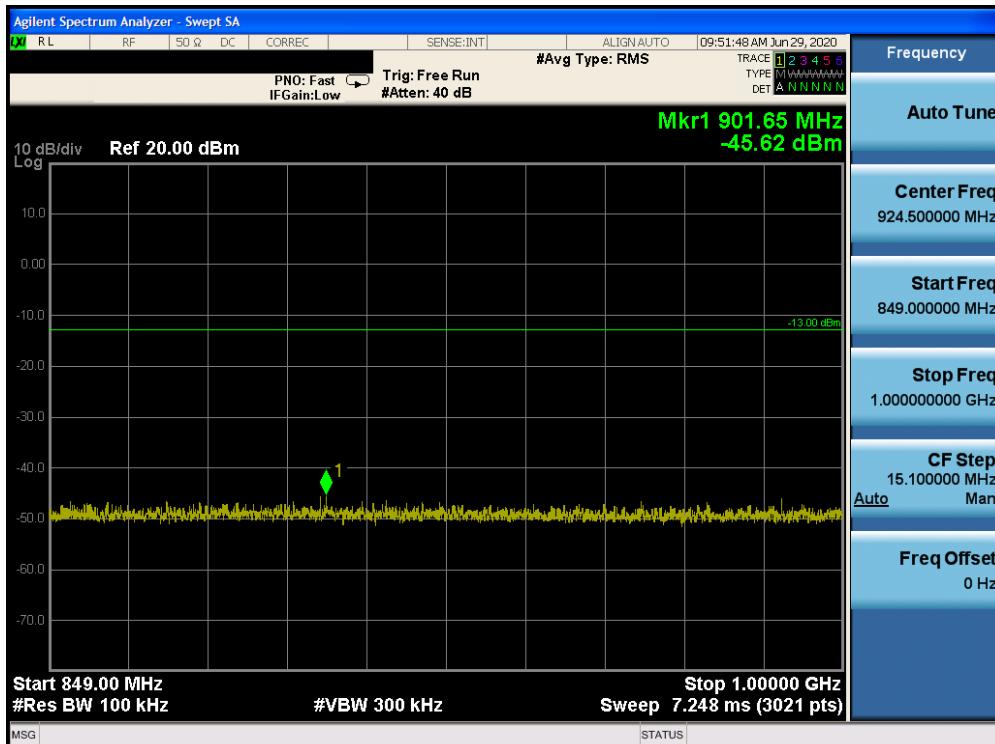


Plot 7-12. Conducted Spurious Plot (Cellular GPRS Mode - Mid Channel)

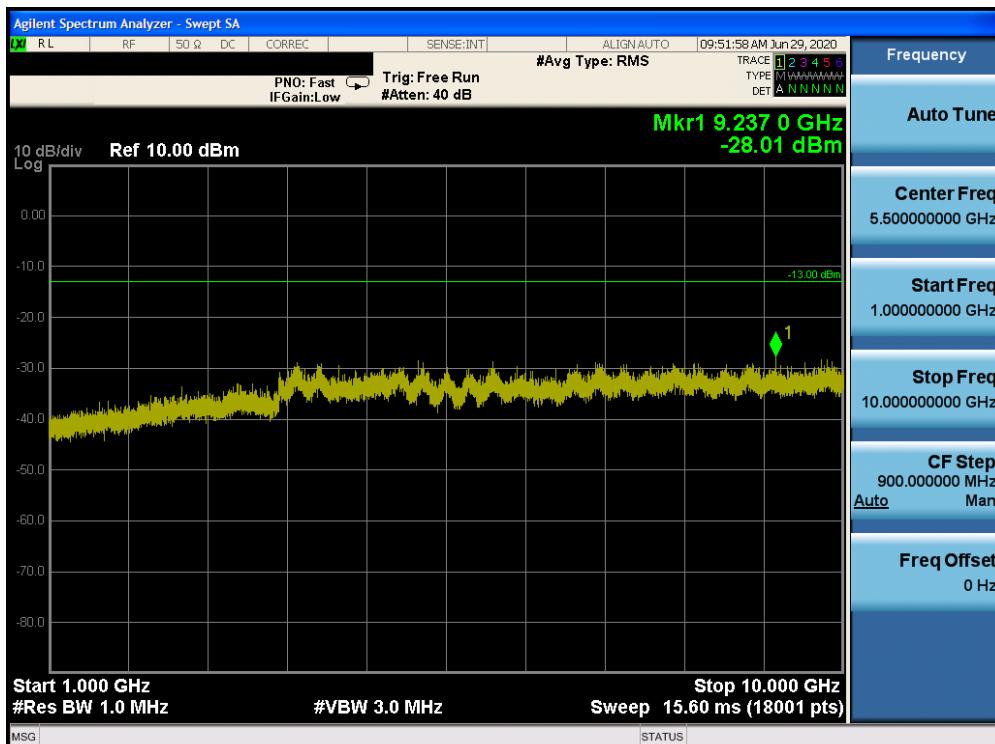


Plot 7-13. Conducted Spurious Plot (Cellular GPRS Mode - Mid Channel)

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 20 of 111	

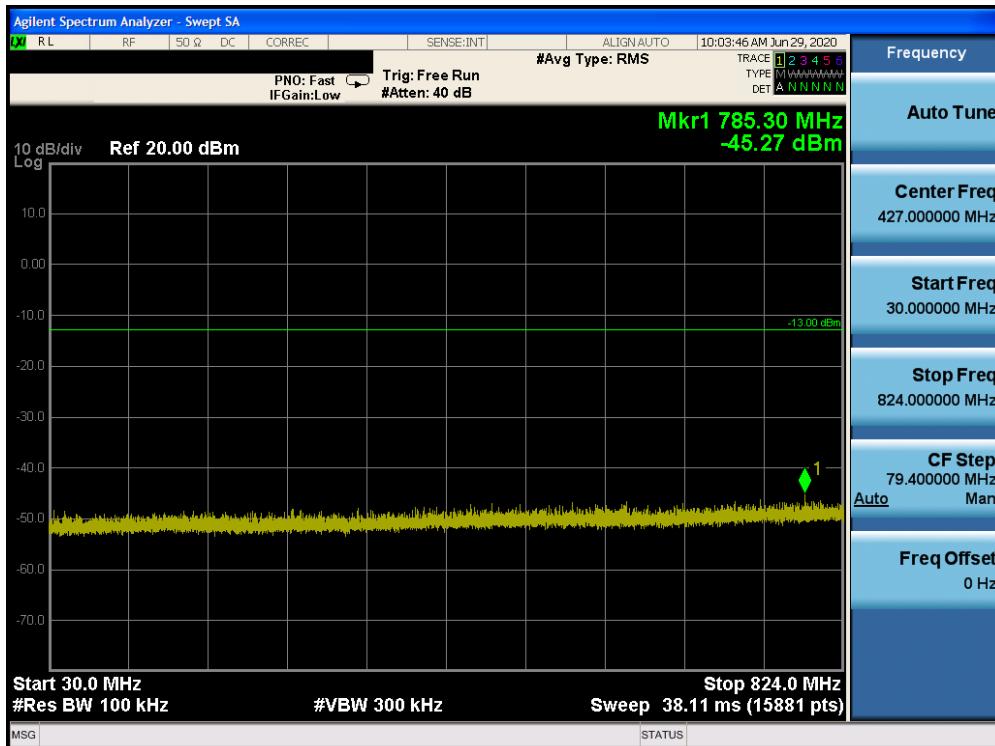


Plot 7-14. Conducted Spurious Plot (Cellular GPRS Mode - High Channel)

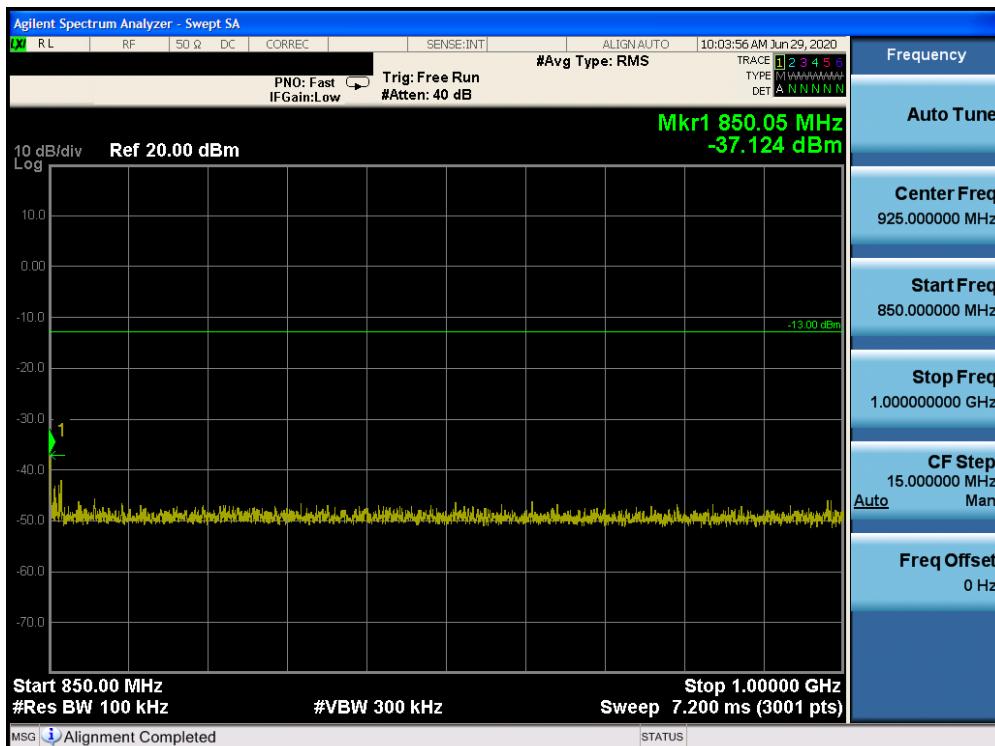

Plot 7-15. Conducted Spurious Plot (Cellular GPRS Mode - High Channel)


FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device		Page 21 of 111

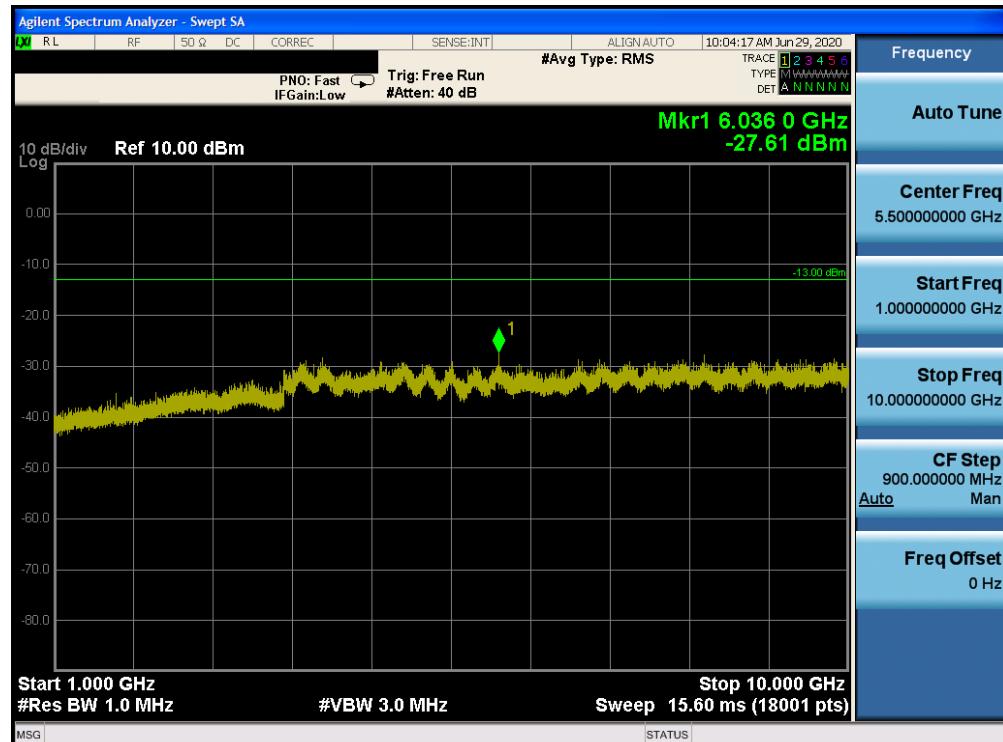


Plot 7-16. Conducted Spurious Plot (Cellular GPRS Mode - High Channel)

FCC ID: BCGA2324	<b>PCTEST</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device		Page 22 of 111

## PCS GPRS Mode

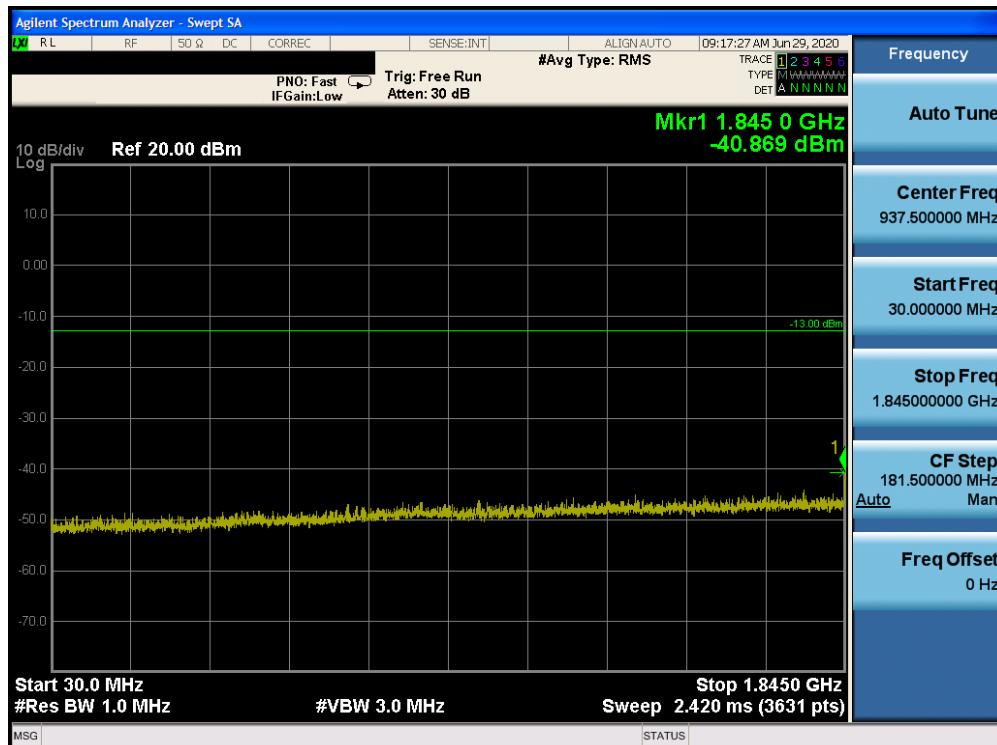


Plot 7-17. Conducted Spurious Plot (PCS GPRS Mode - Low Channel)

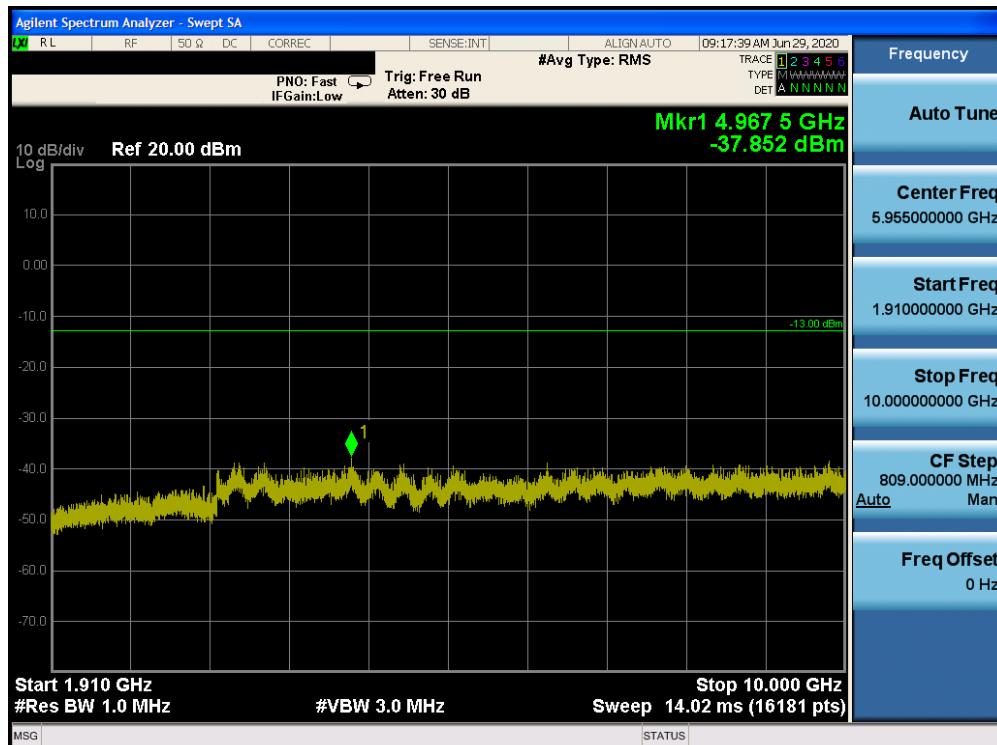


Plot 7-18. Conducted Spurious Plot (PCS GPRS Mode - Low Channel)

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device		Page 23 of 111

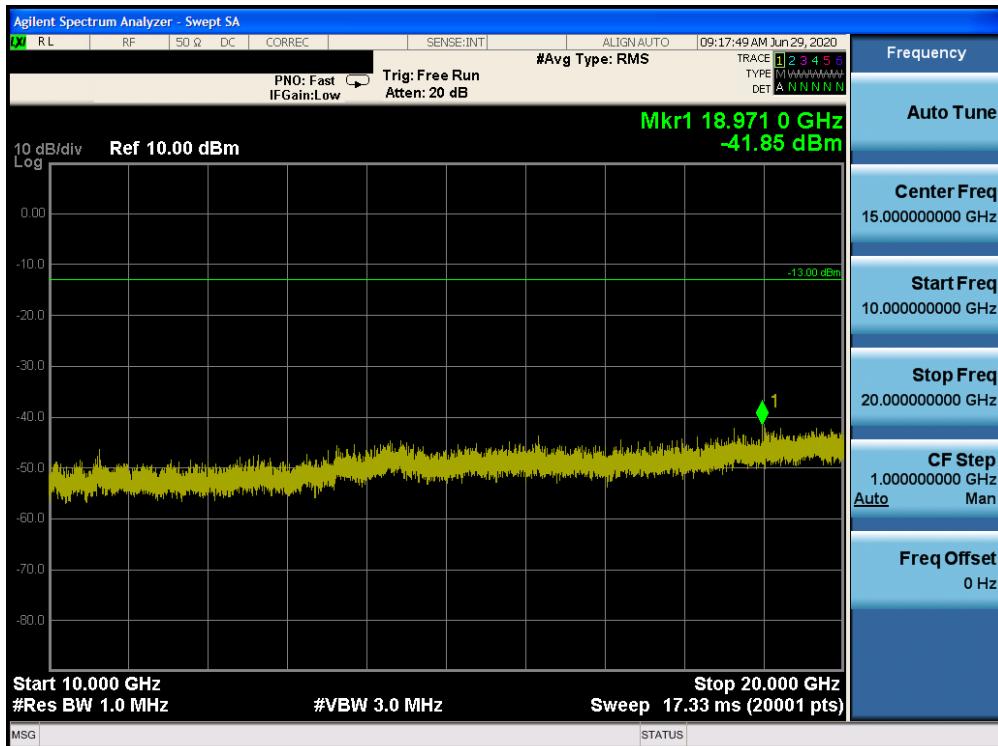


Plot 7-19. Conducted Spurious Plot (PCS GPRS Mode - Low Channel)

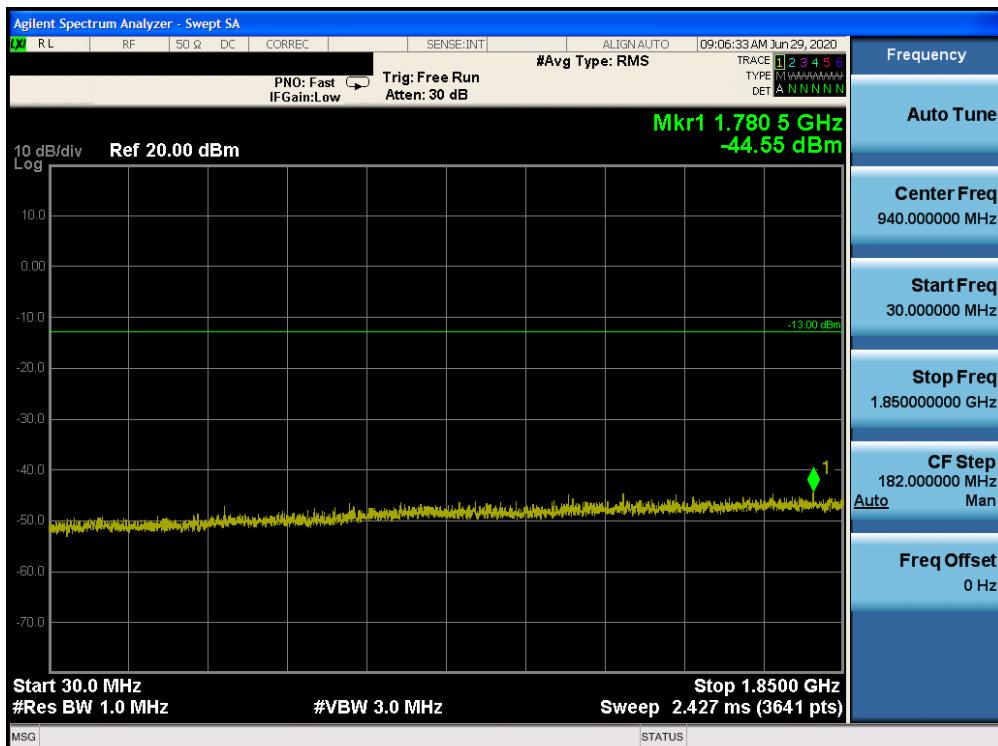


Plot 7-20. Conducted Spurious Plot (PCS GPRS Mode - Mid Channel)

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 24 of 111	

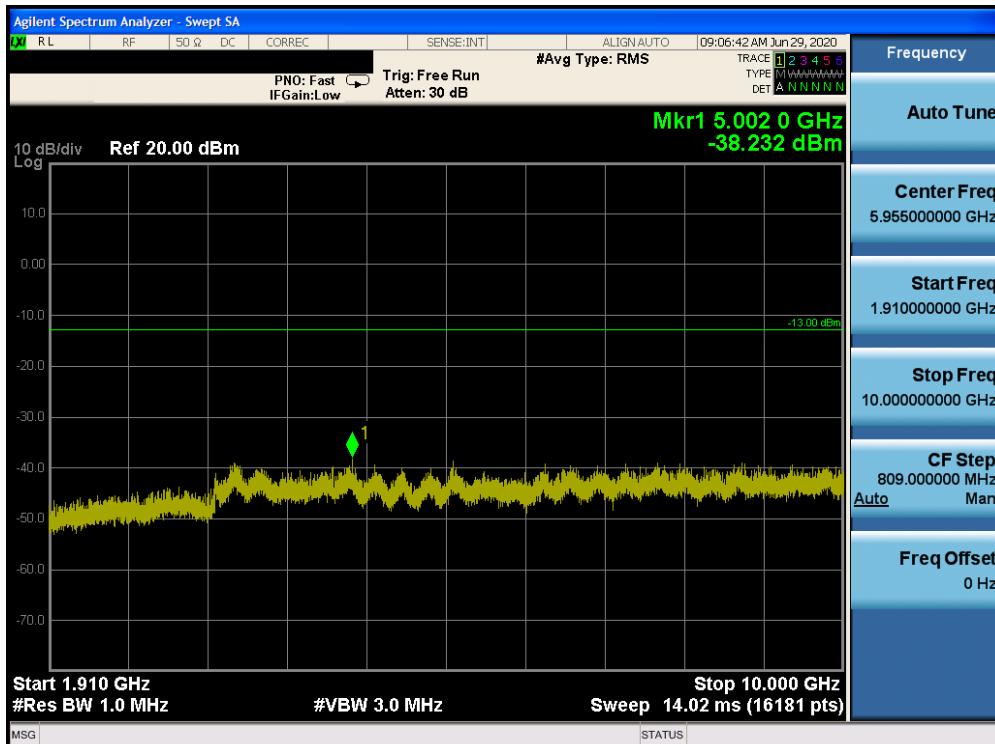


Plot 7-21. Conducted Spurious Plot (PCS GPRS Mode - Mid Channel)

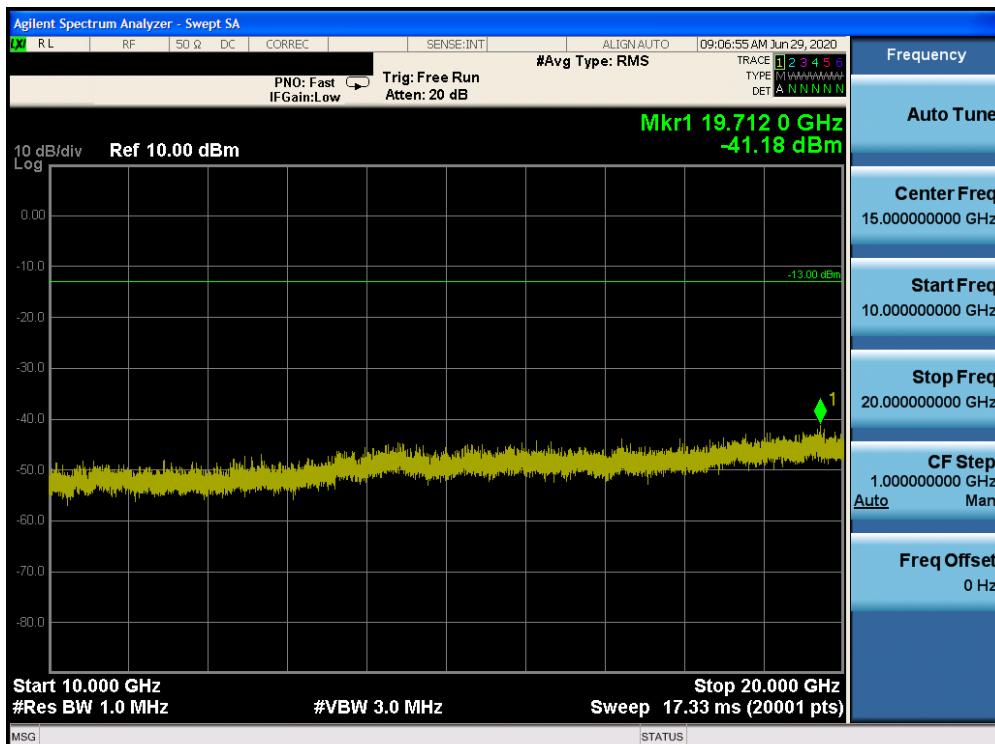


Plot 7-22. Conducted Spurious Plot (PCS GPRS Mode - Mid Channel)

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 25 of 111	

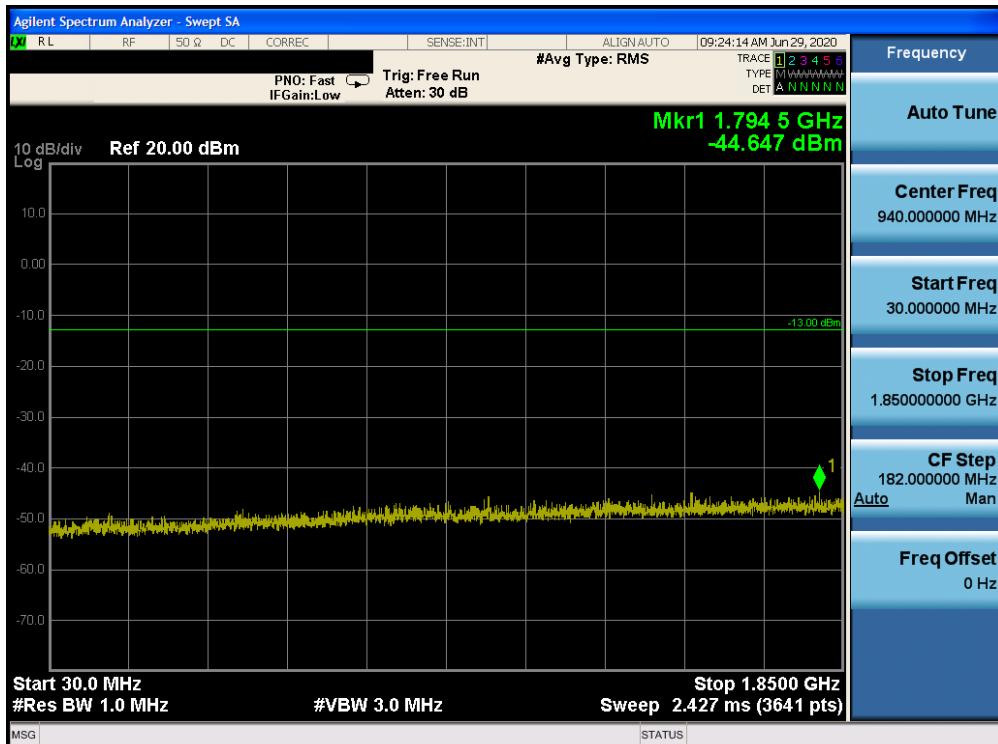


Plot 7-23. Conducted Spurious Plot (PCS GPRS Mode - High Channel)

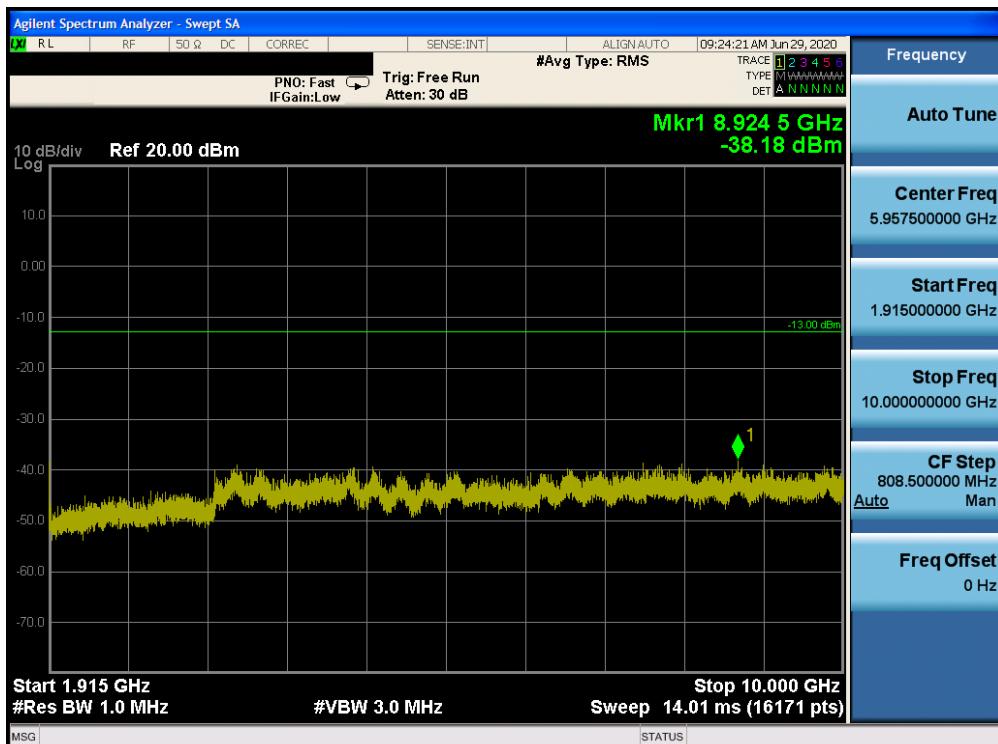

Plot 7-24. Conducted Spurious Plot (PCS GPRS Mode - High Channel)

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 26 of 111	

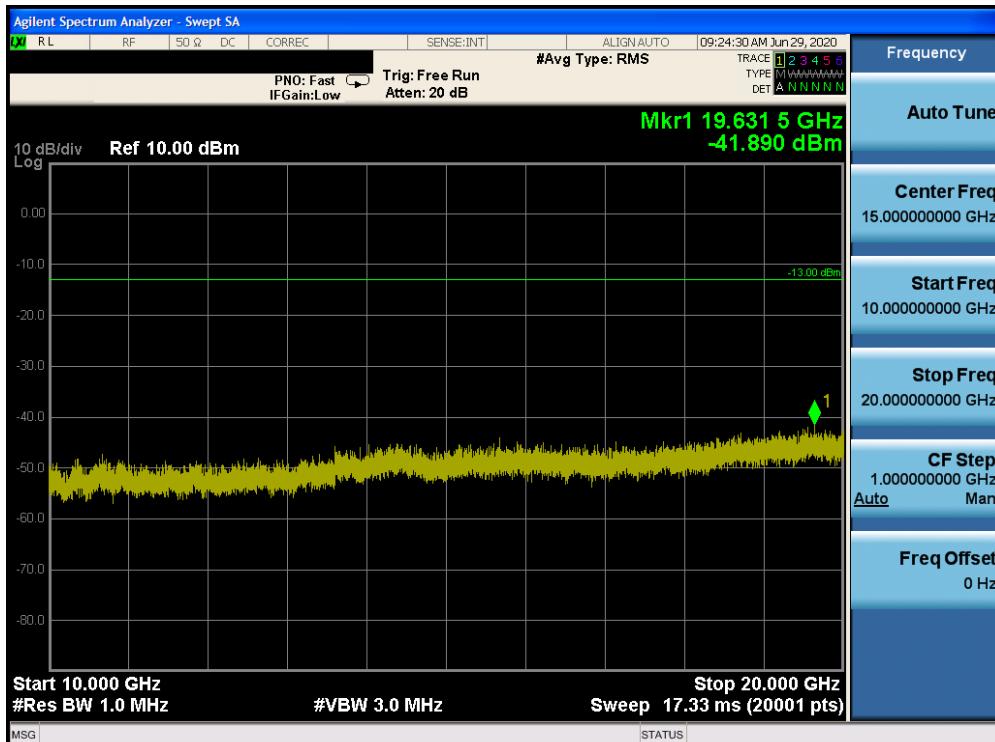


Plot 7-25. Conducted Spurious Plot (PCS GPRS Mode - High Channel)

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by:
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Quality Manager Page 27 of 111	

## Cellular WCDMA Mode




Plot 7-26. Conducted Spurious Plot (Cellular WCDMA Mode - Low Channel)

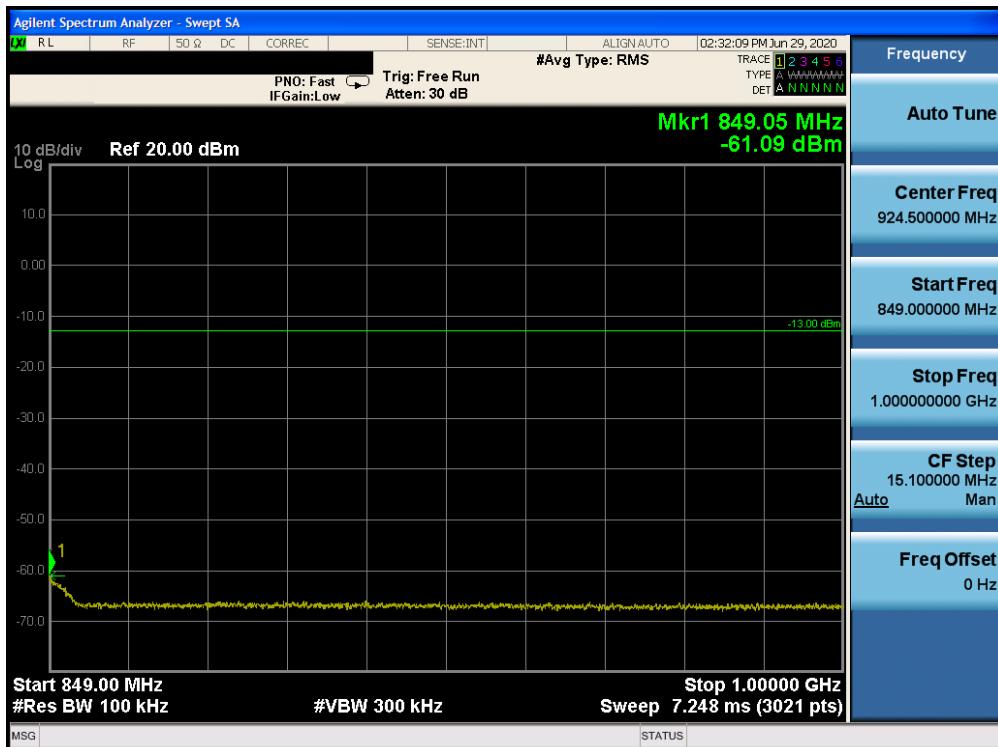


Plot 7-27. Conducted Spurious Plot (Cellular WCDMA Mode - Low Channel)

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device		Page 28 of 111

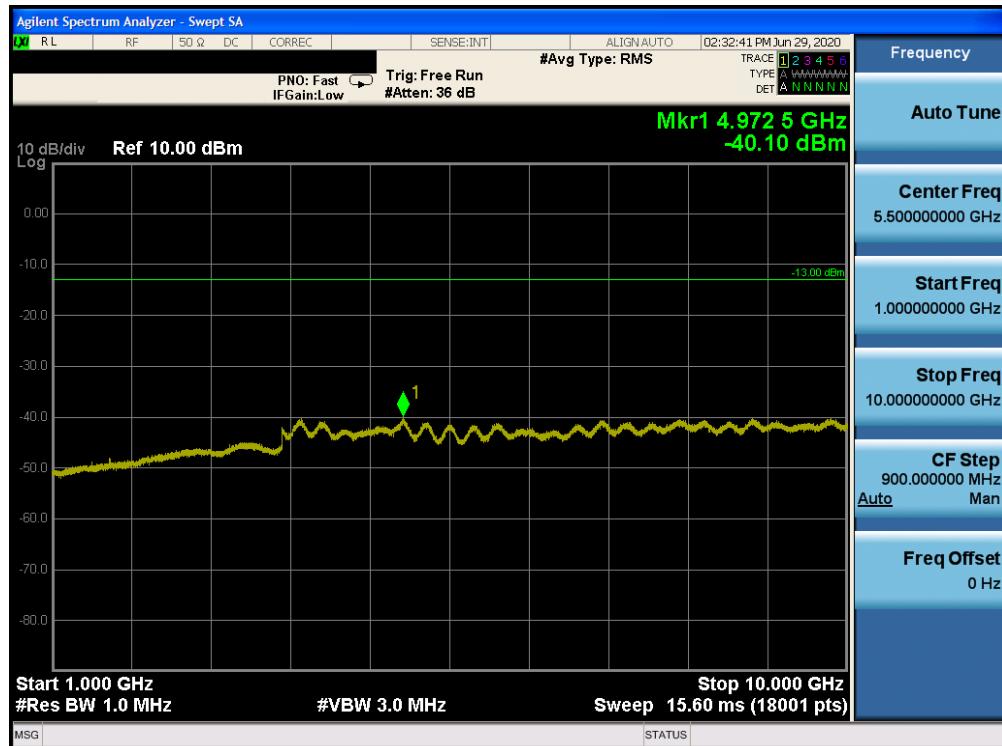


Plot 7-28. Conducted Spurious Plot (Cellular WCDMA Mode - Low Channel)

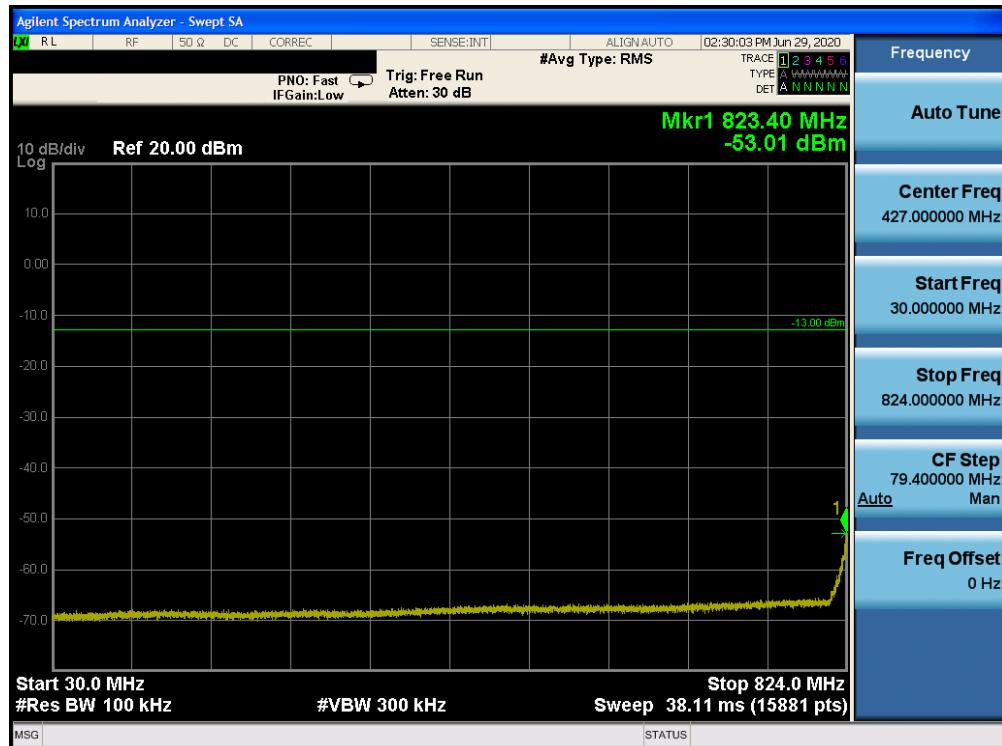


Plot 7-29. Conducted Spurious Plot (Cellular WCDMA Mode - Mid Channel)

FCC ID: BCGA2324	<b>PCTEST</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device		Page 29 of 111

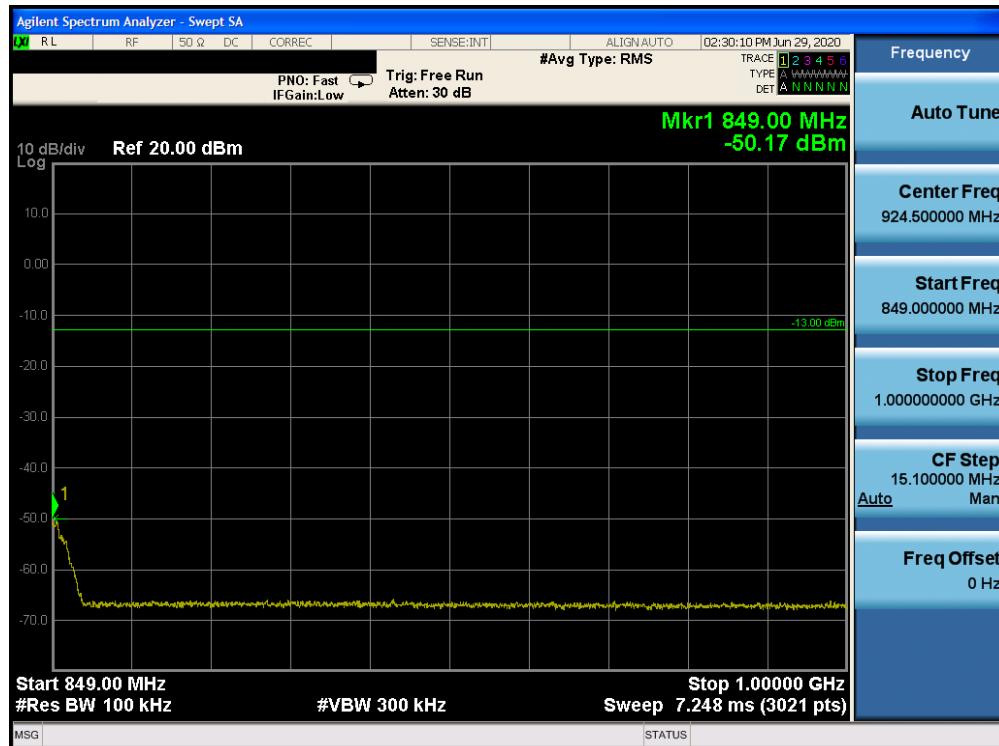


Plot 7-30. Conducted Spurious Plot (Cellular WCDMA Mode - Mid Channel)

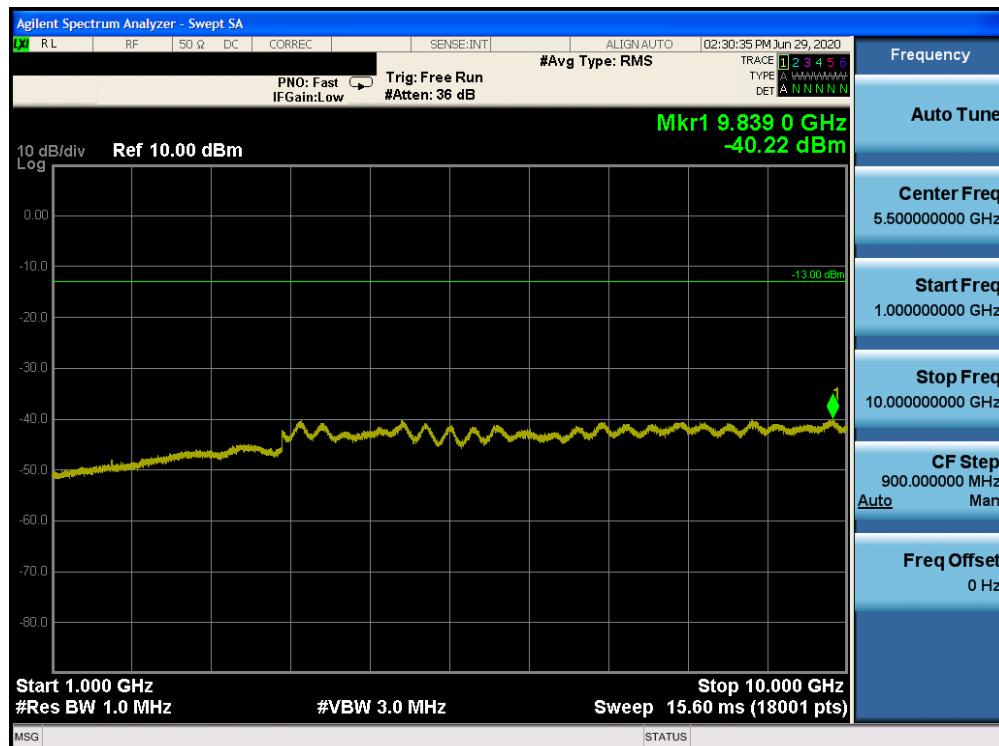


Plot 7-31. Conducted Spurious Plot (Cellular WCDMA Mode - Mid Channel)

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 30 of 111	

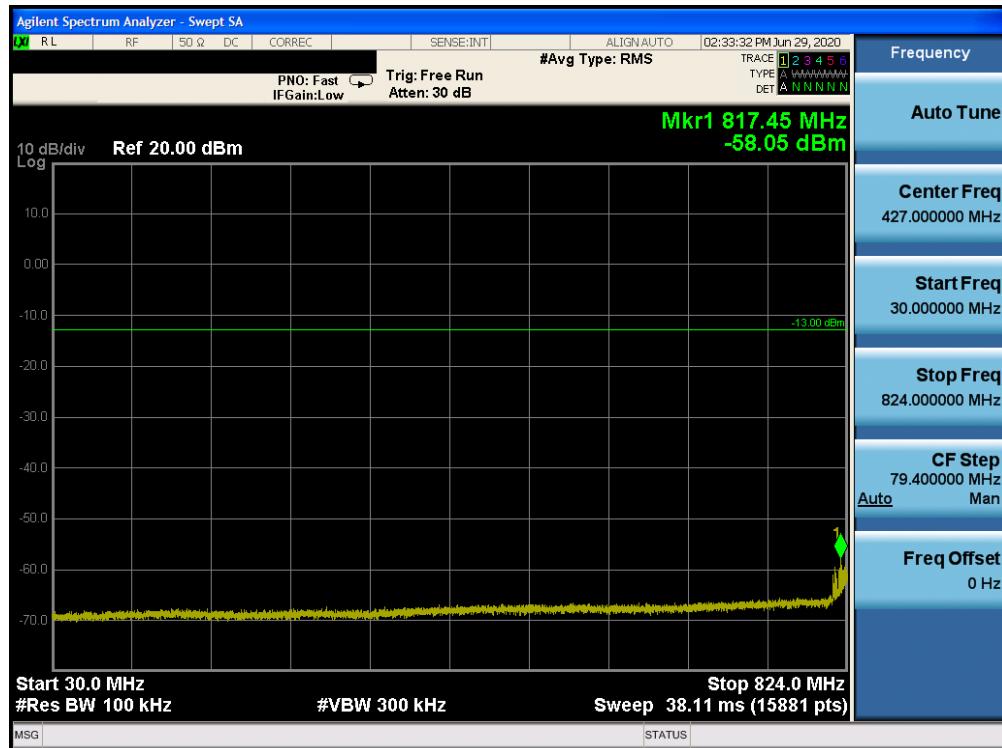

Plot 7-32. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)

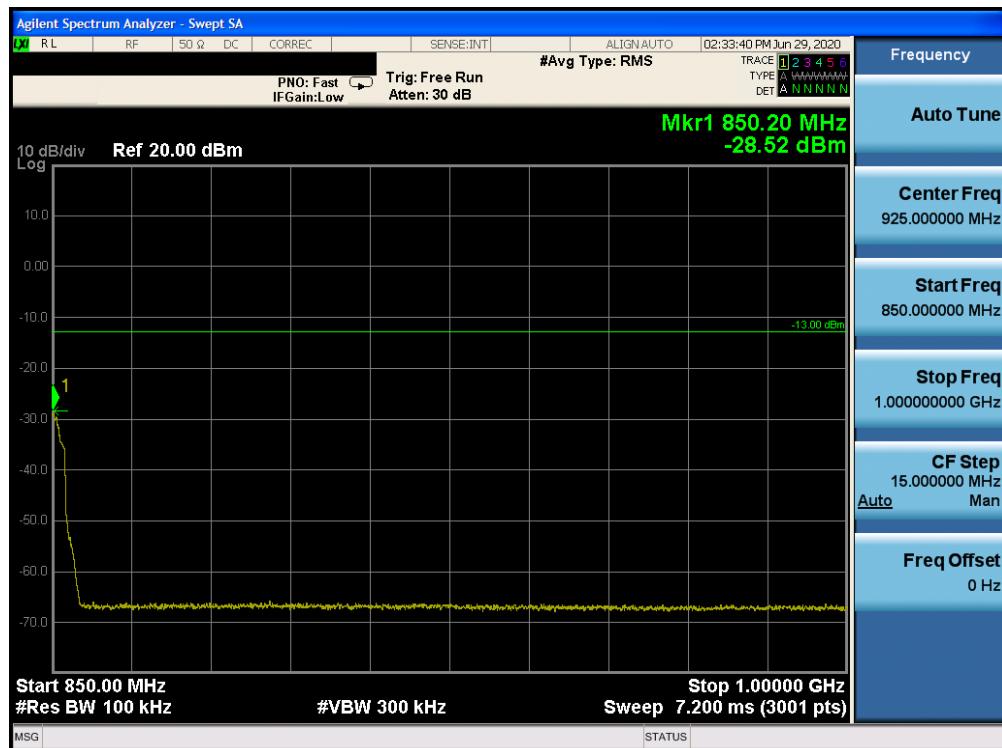

Plot 7-33. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)


FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 31 of 111	




Plot 7-34. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device		Page 32 of 111

## AWS WCDMA Mode

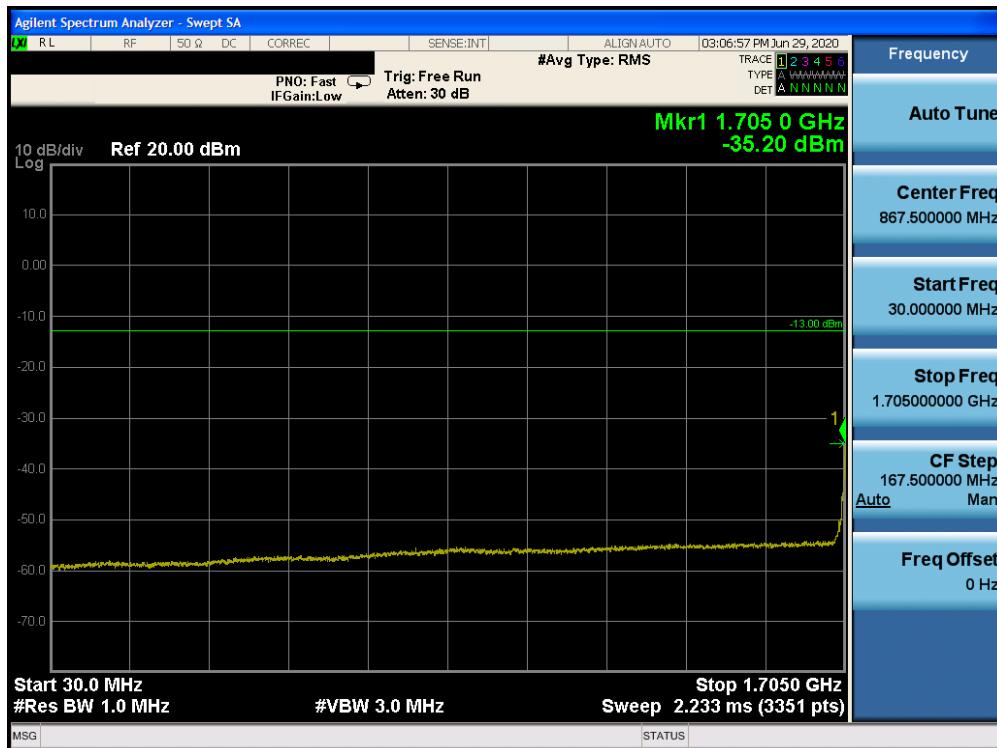


Plot 7-35. Conducted Spurious Plot (AWS WCDMA Mode - Low Channel)

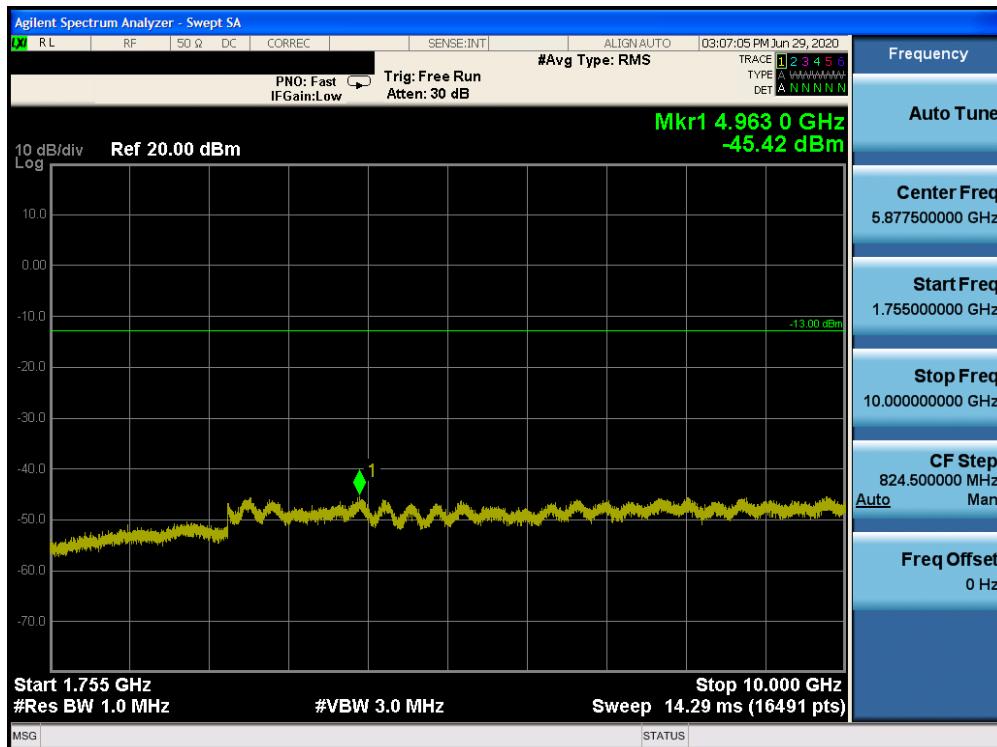

Plot 7-36. Conducted Spurious Plot (AWS WCDMA Mode - Low Channel)

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 33 of 111	

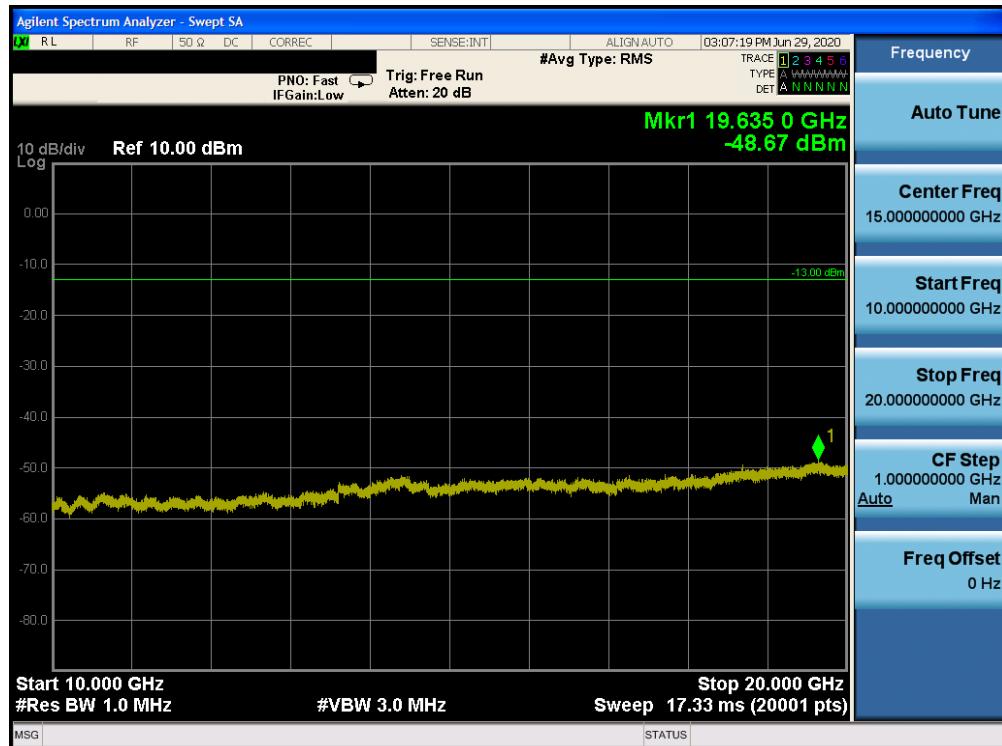


Plot 7-37. Conducted Spurious Plot (AWS WCDMA Mode - Low Channel)



Plot 7-38. Conducted Spurious Plot (AWS WCDMA Mode - Mid Channel)

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 34 of 111	

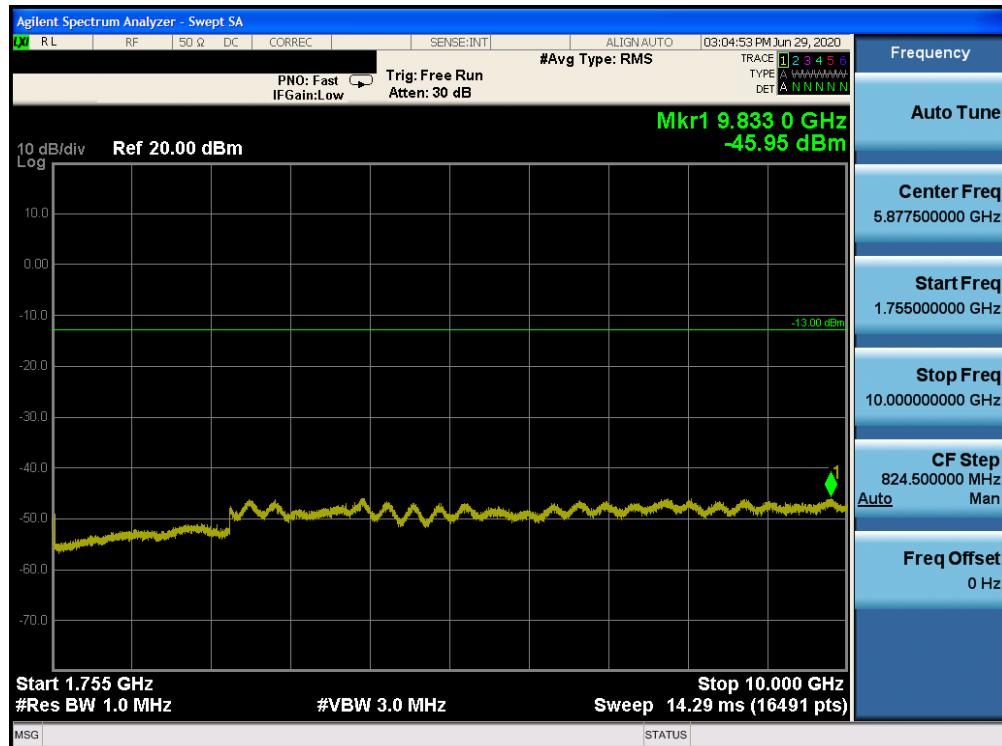


Plot 7-39. Conducted Spurious Plot (AWS WCDMA Mode - Mid Channel)




Plot 7-40. Conducted Spurious Plot (AWS WCDMA Mode - Mid Channel)

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 35 of 111	

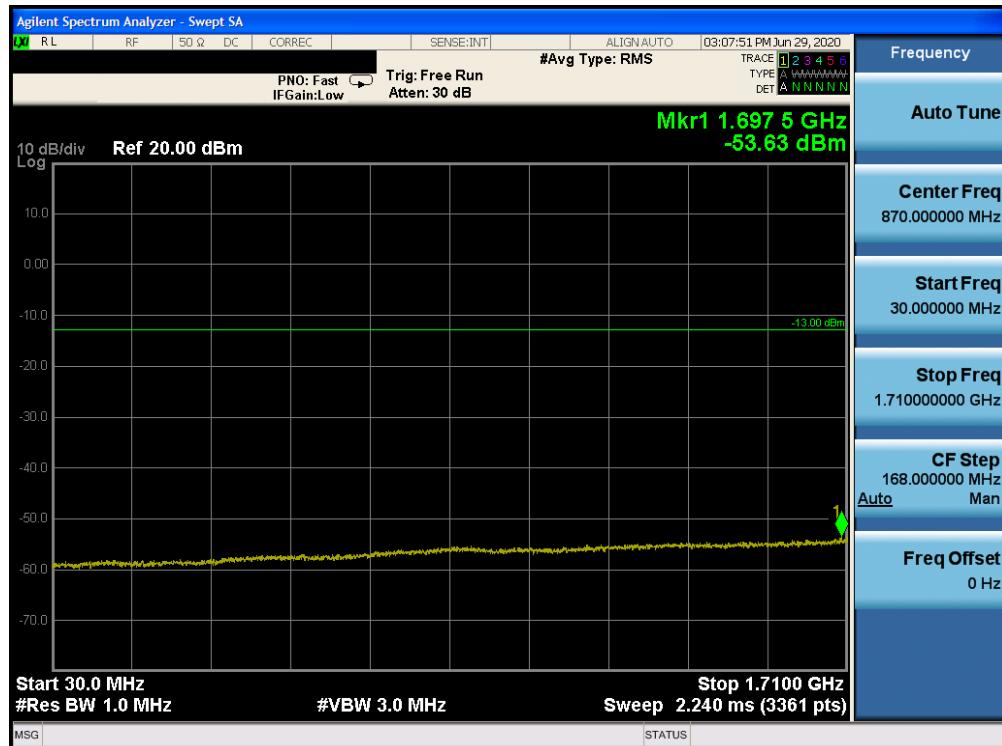


Plot 7-41. Conducted Spurious Plot (AWS WCDMA Mode - High Channel)

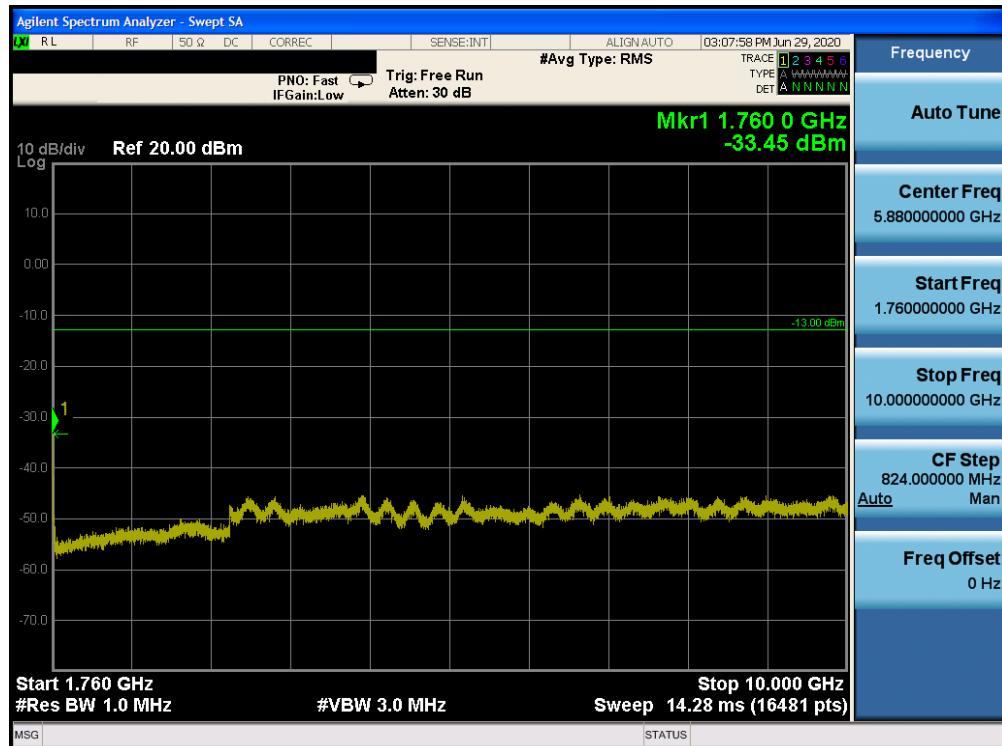

Plot 7-42. Conducted Spurious Plot (AWS WCDMA Mode - High Channel)

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device		Page 36 of 111

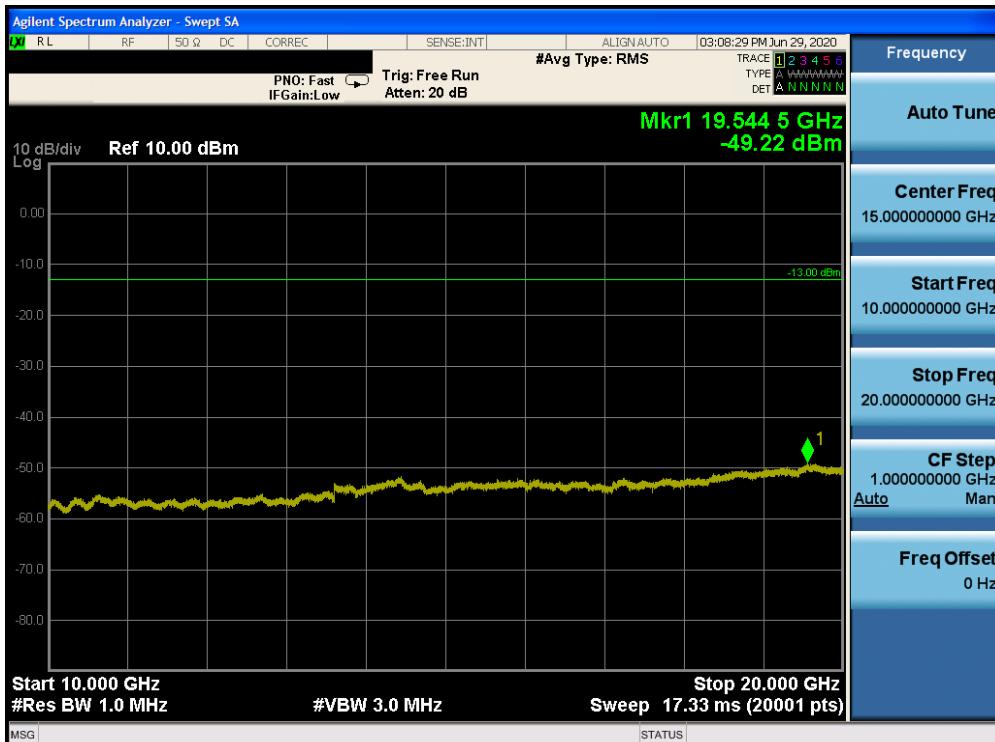


Plot 7-43. Conducted Spurious Plot (AWS WCDMA Mode - High Channel)

FCC ID: BCGA2324	<b>PCTEST</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device		Page 37 of 111

## PCS WCDMA Mode




Plot 7-44. Conducted Spurious Plot (PCS WCDMA Mode - Low Channel)

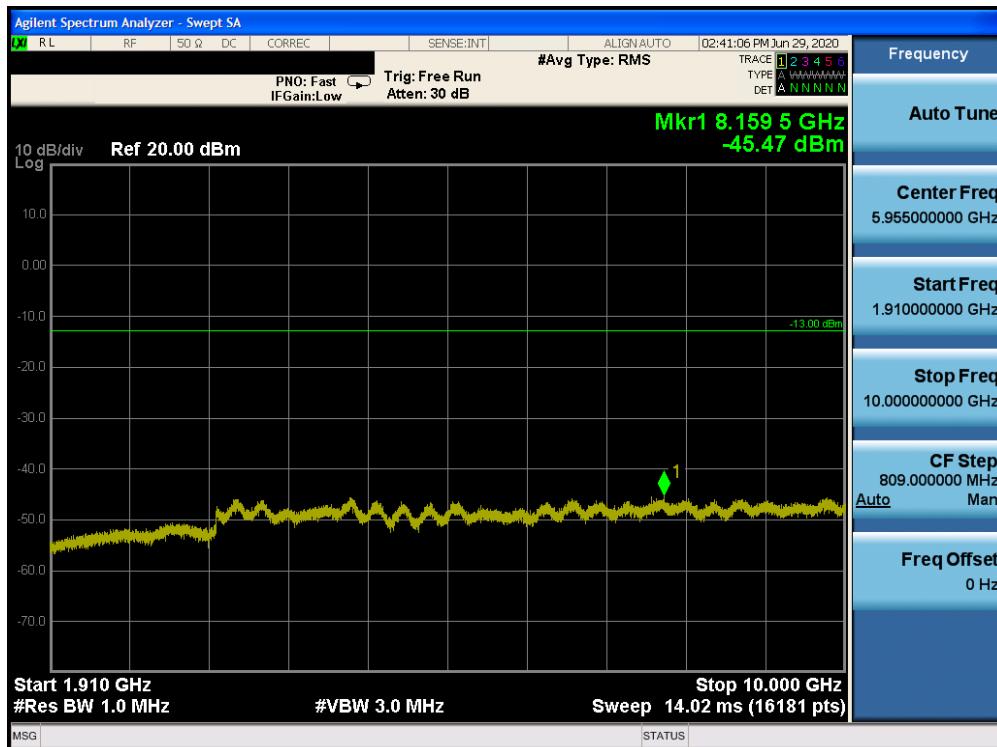


Plot 7-45. Conducted Spurious Plot (PCS WCDMA Mode - Low Channel)

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device		Page 38 of 111

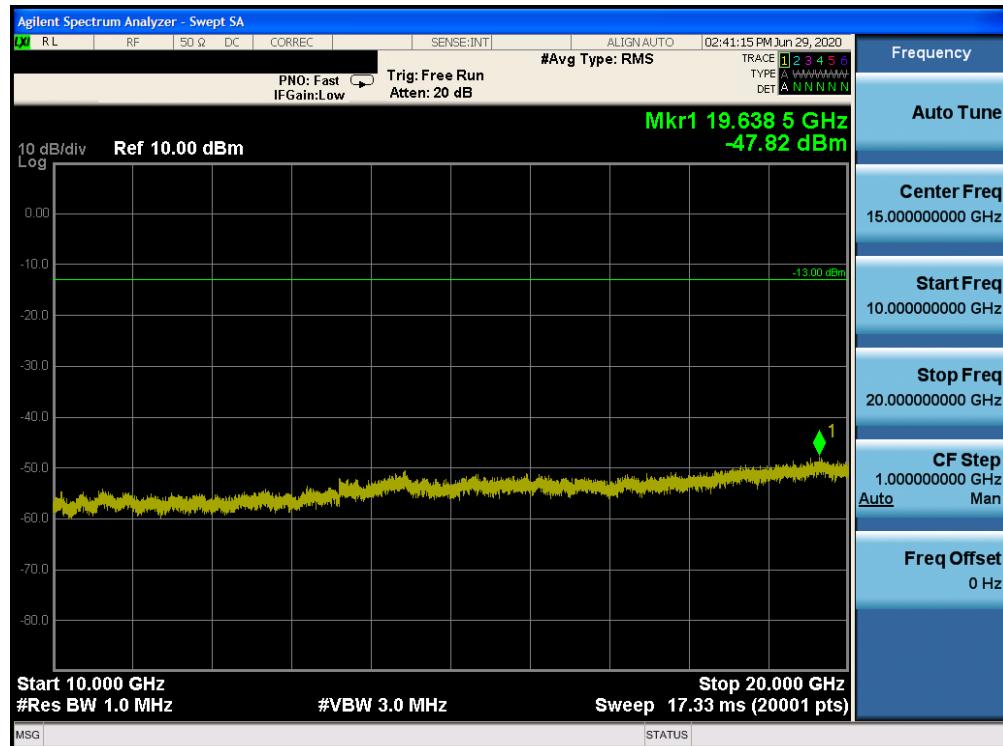


Plot 7-46. Conducted Spurious Plot (PCS WCDMA Mode - Low Channel)

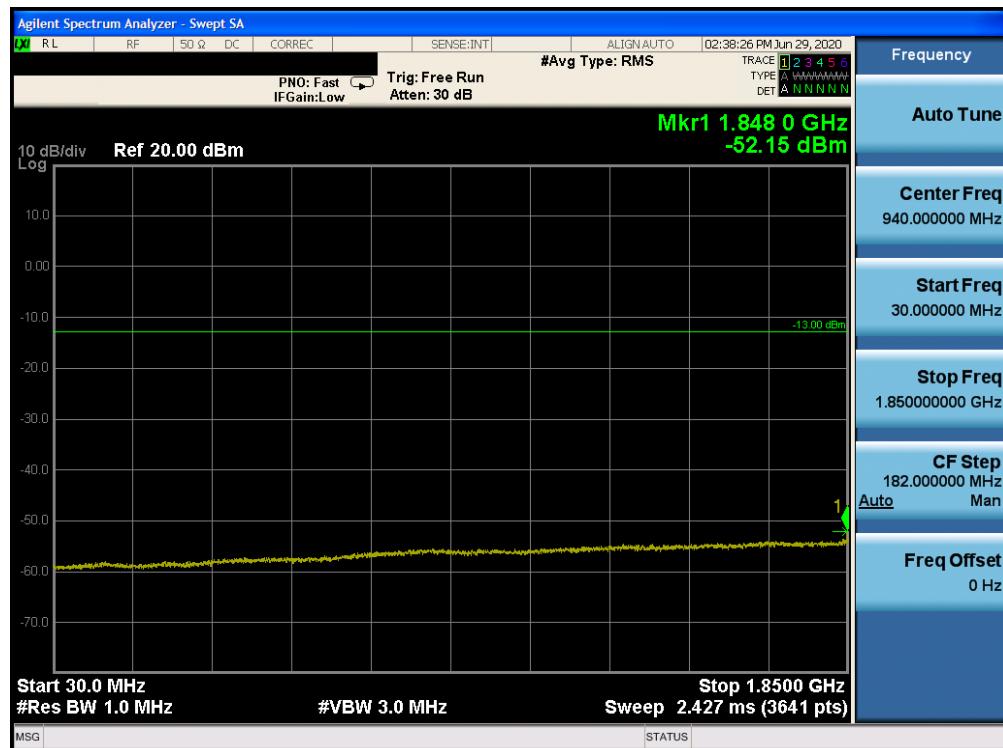

Plot 7-47. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)


FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 39 of 111	

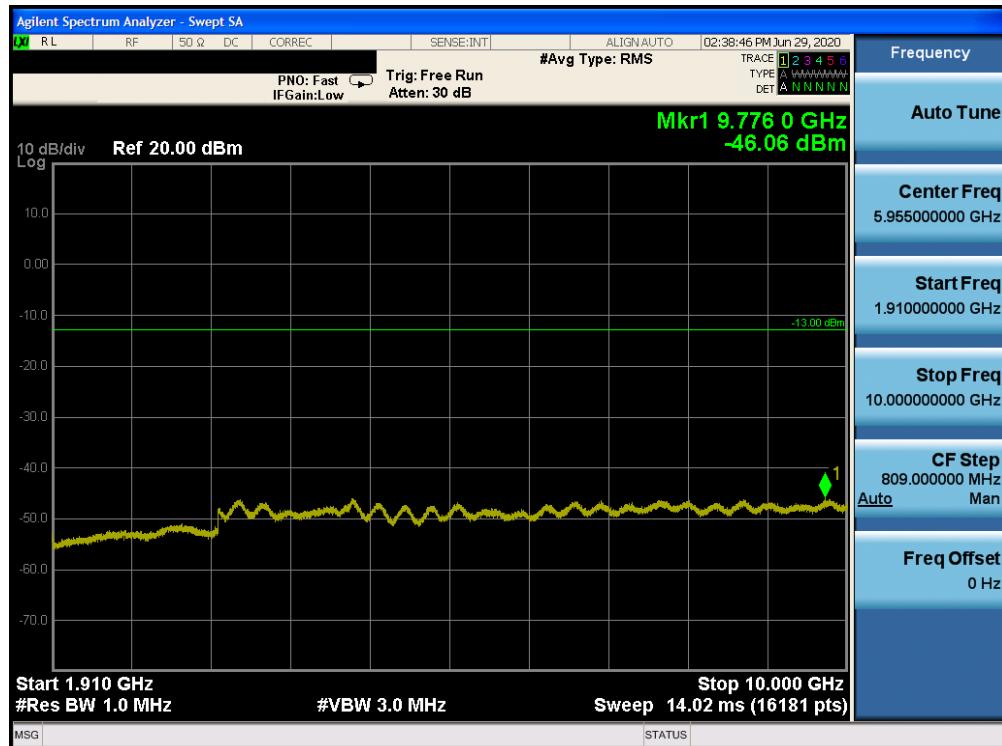


Plot 7-48. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)




Plot 7-49. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)

FCC ID: BCGA2324	 <b>PCTEST®</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 40 of 111

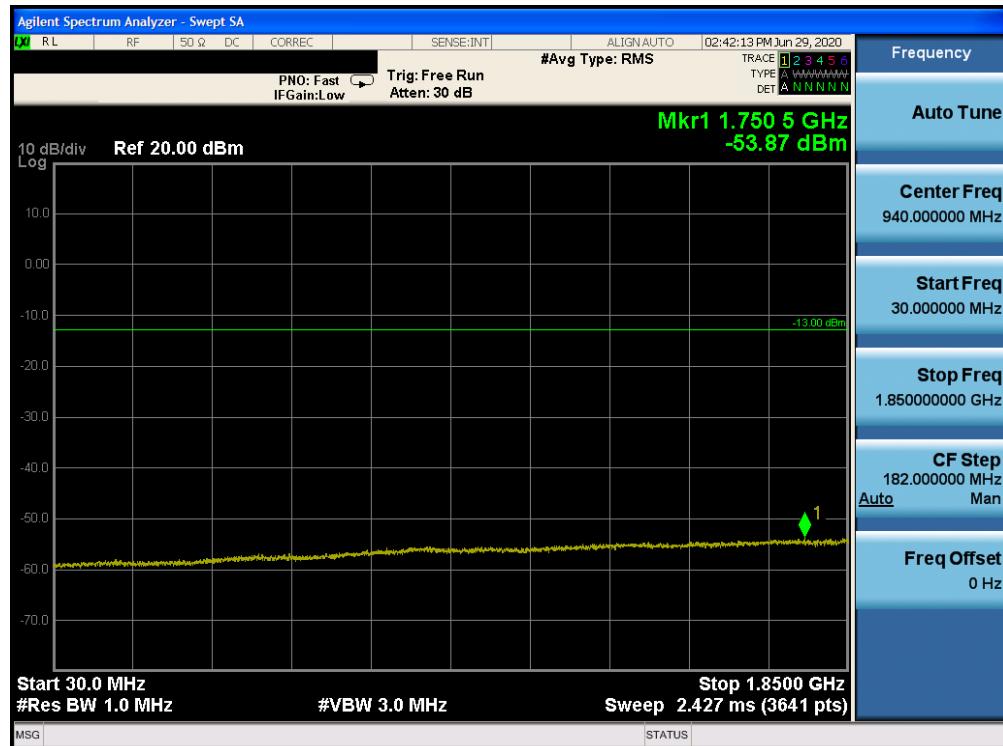


Plot 7-50. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

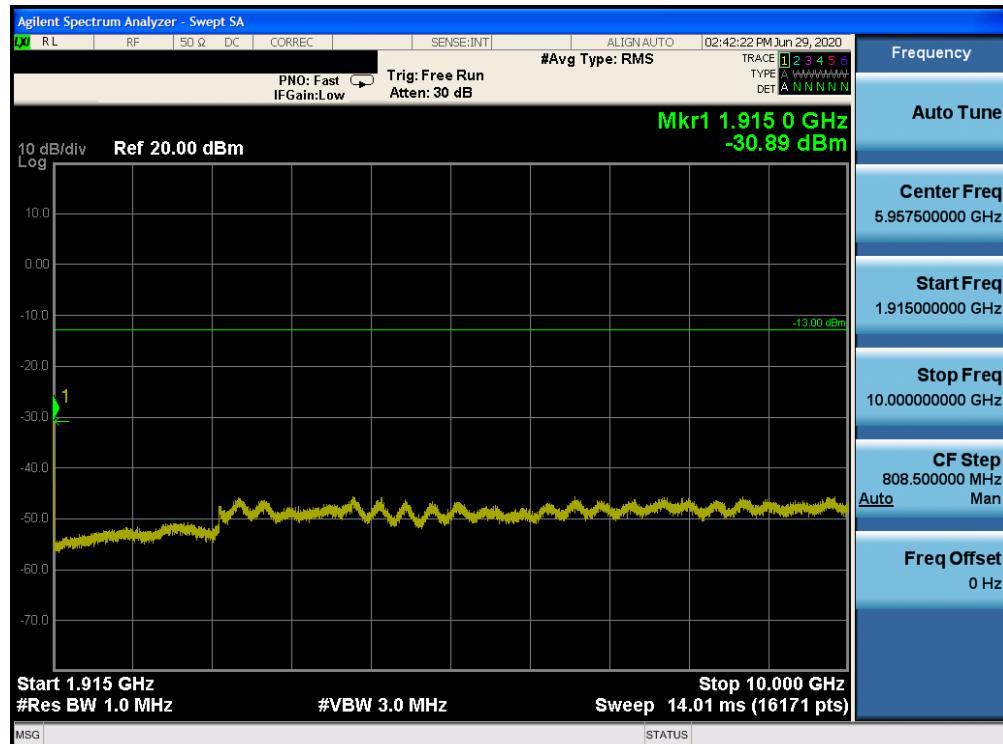

Plot 7-51. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device		Page 41 of 111

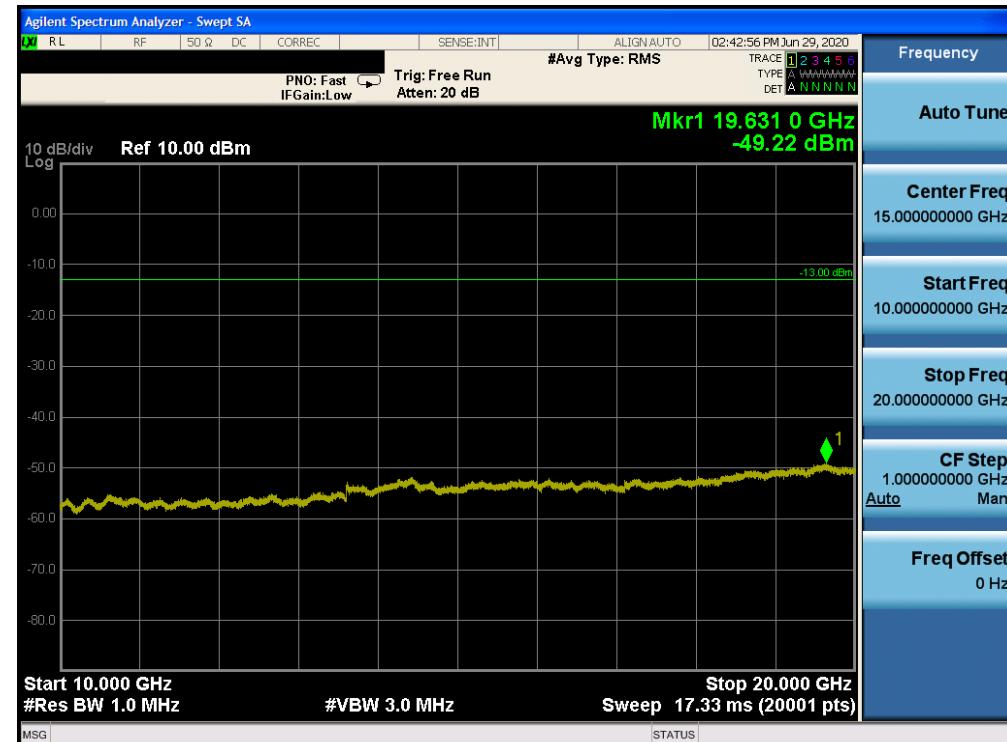

Plot 7-52. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

FCC ID: BCGA2324	<b>PCTEST</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device		Page 42 of 111

## 7.4 Band Edge Emissions at Antenna Terminal

### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

***The minimum permissible attenuation level of any spurious emission is  $43 + 10 \log_{10}(P_{[Watts]})$ , where P is the transmitter power in Watts.***

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 6.0

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW  $\geq 1\%$  of the emission bandwidth
4. VBW  $\geq 3 \times$  RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times$  Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup


The EUT and measurement equipment were set up as shown in the diagram below.

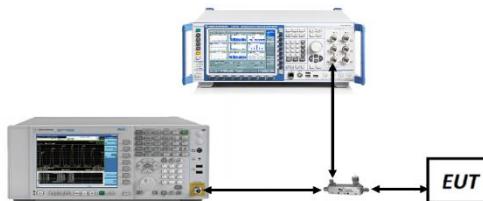


**Figure 7-3. Test Instrument & Measurement Setup**

### Test Notes


1. Per 22.917(b), 24.238(b), 27.53(h)(3), and RSS-132(5.5), RSS-133(6.5), RSS-139(6.5), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
2. All ports were tested and only the worse case data were reported.

FCC ID: BCGA2324	 <b>PCTEST</b> <sup>®</sup> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device		Page 43 of 111

## Cellular GPRS Mode

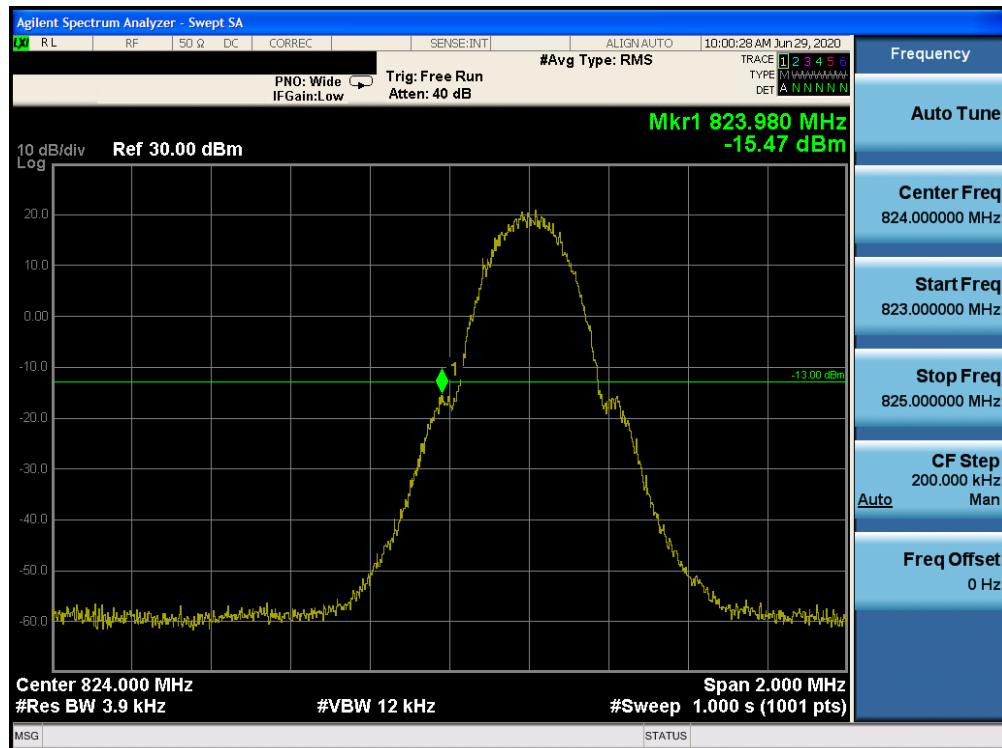


Plot 7-53. Band Edge Plot (Cellular GPRS Mode - Low Channel)

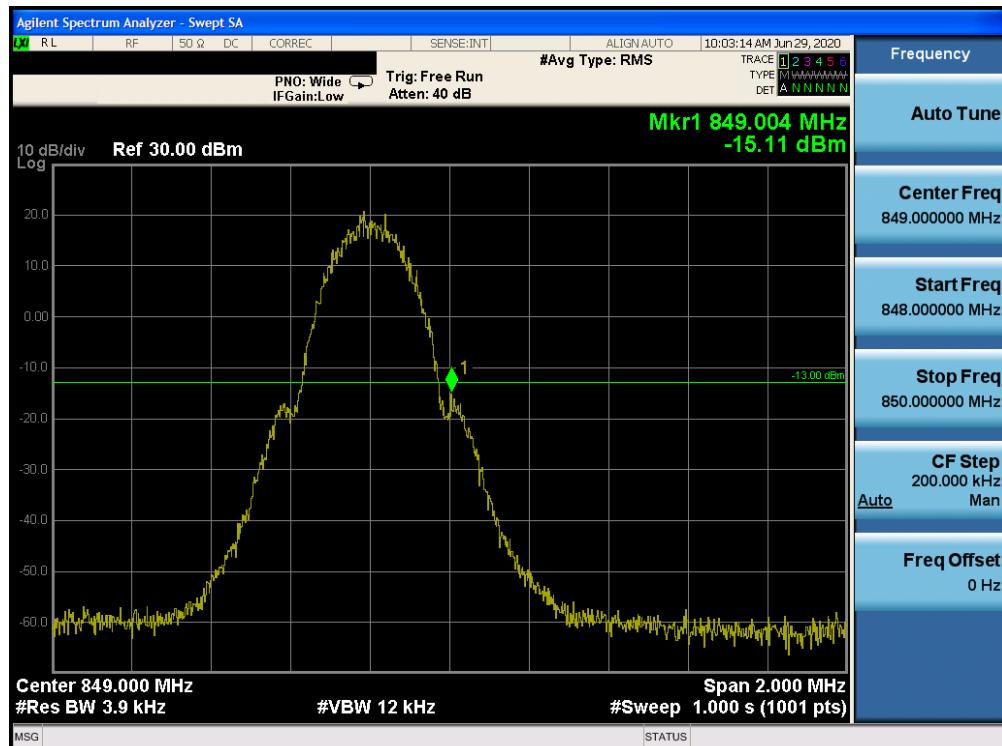


Plot 7-54. Band Edge Plot (Cellular GPRS Mode - High Channel)

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 44 of 111	

## PCS GPRS Mode

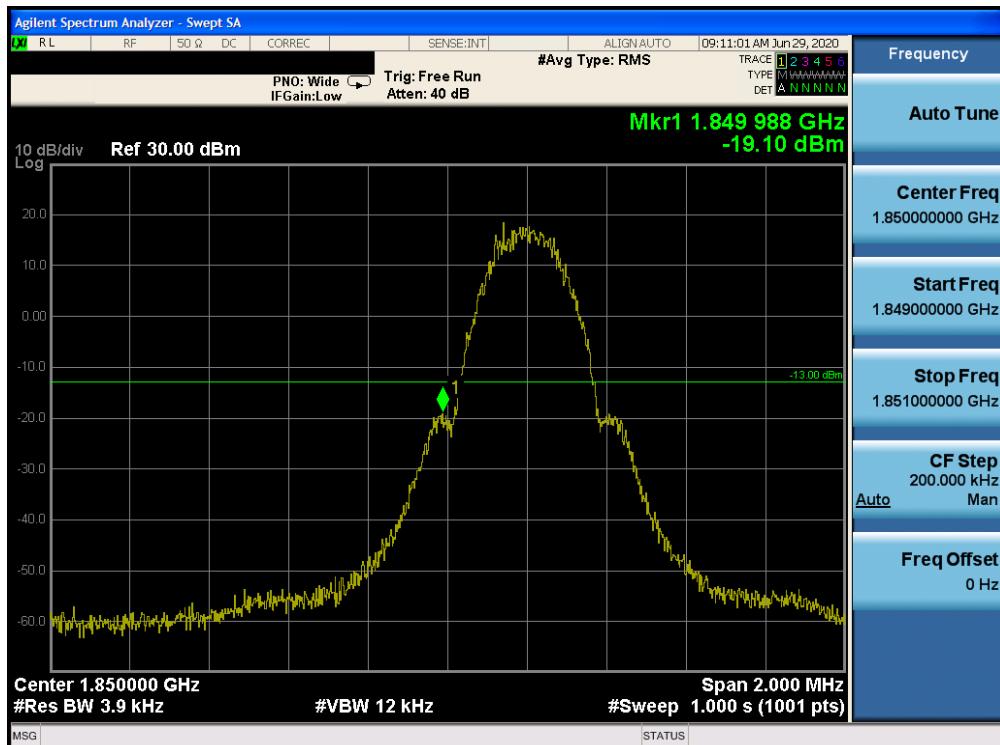


Plot 7-55. Band Edge Plot (PCS GPRS Mode - Low Channel)

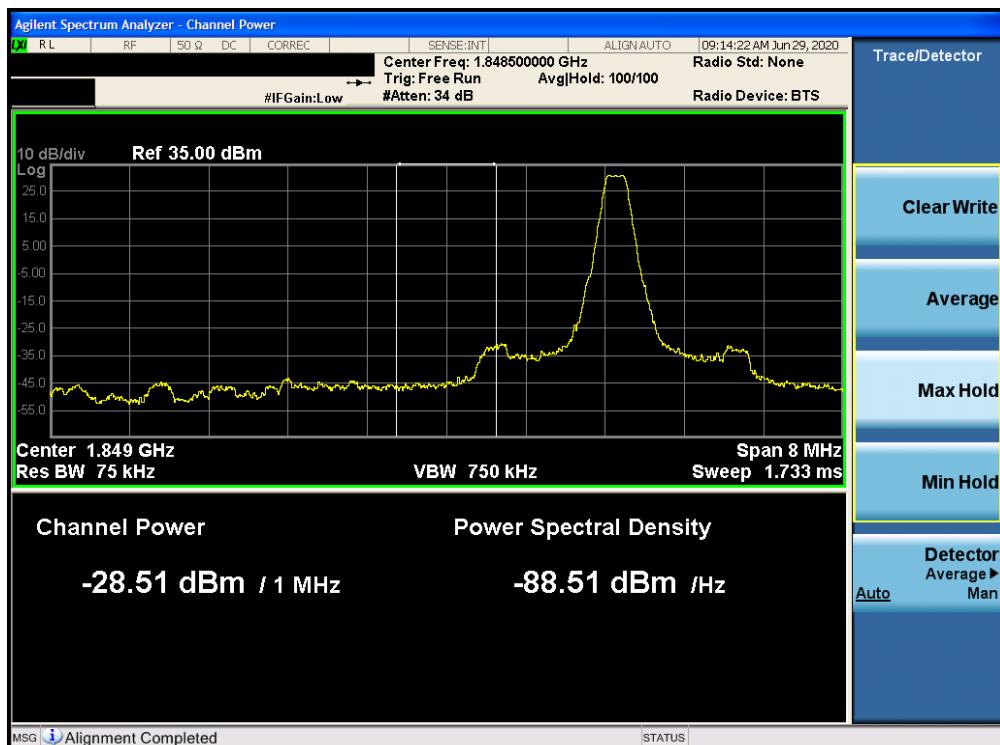


Plot 7-56. Extended Band Edge Plot (PCS GPRS Mode - Low Channel)

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device		Page 45 of 111

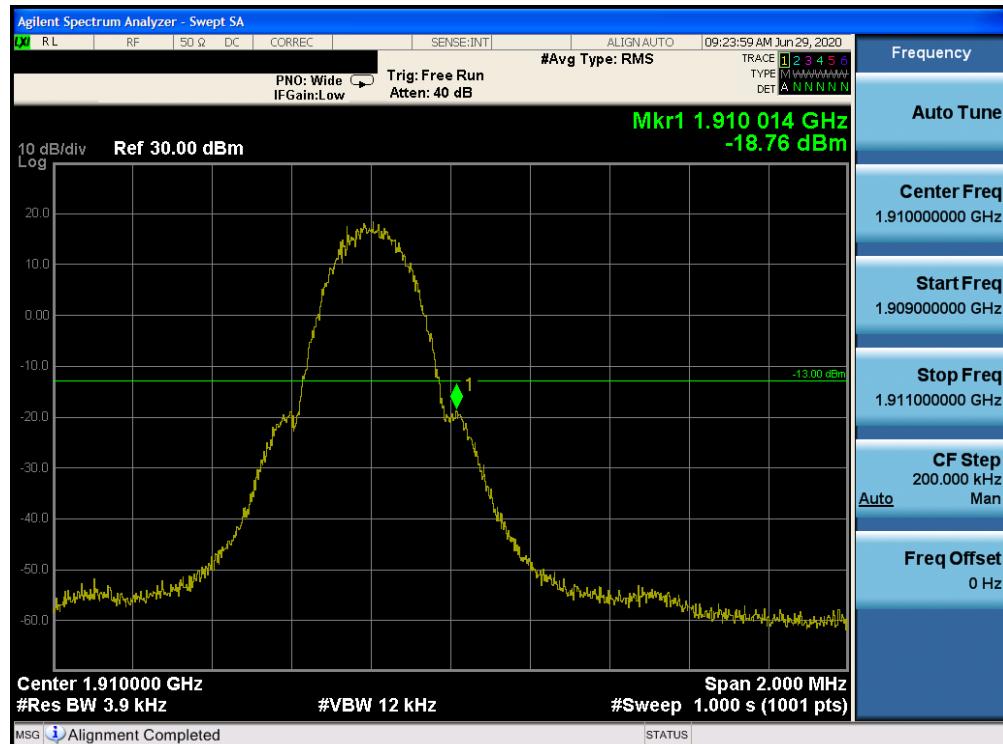


Plot 7-57. Band Edge Plot (PCS GPRS Mode - High Channel)

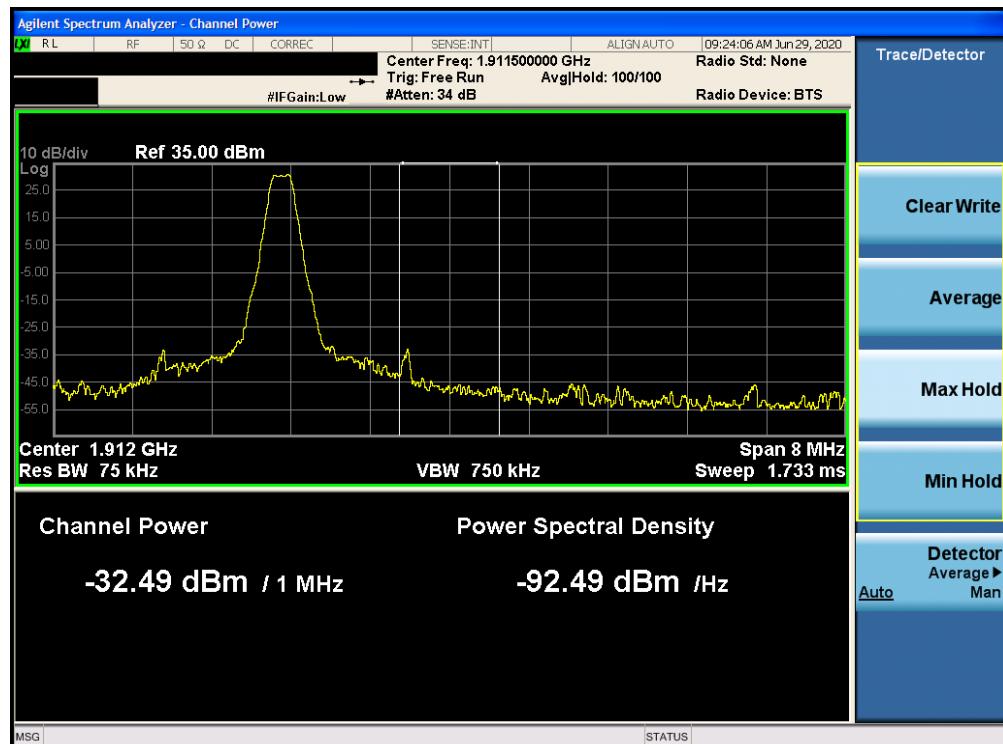


Plot 7-58. Extended Band Edge Plot (PCS GPRS Mode - High Channel)

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by:
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Quality Manager Page 46 of 111	

## Cellular WCDMA Mode

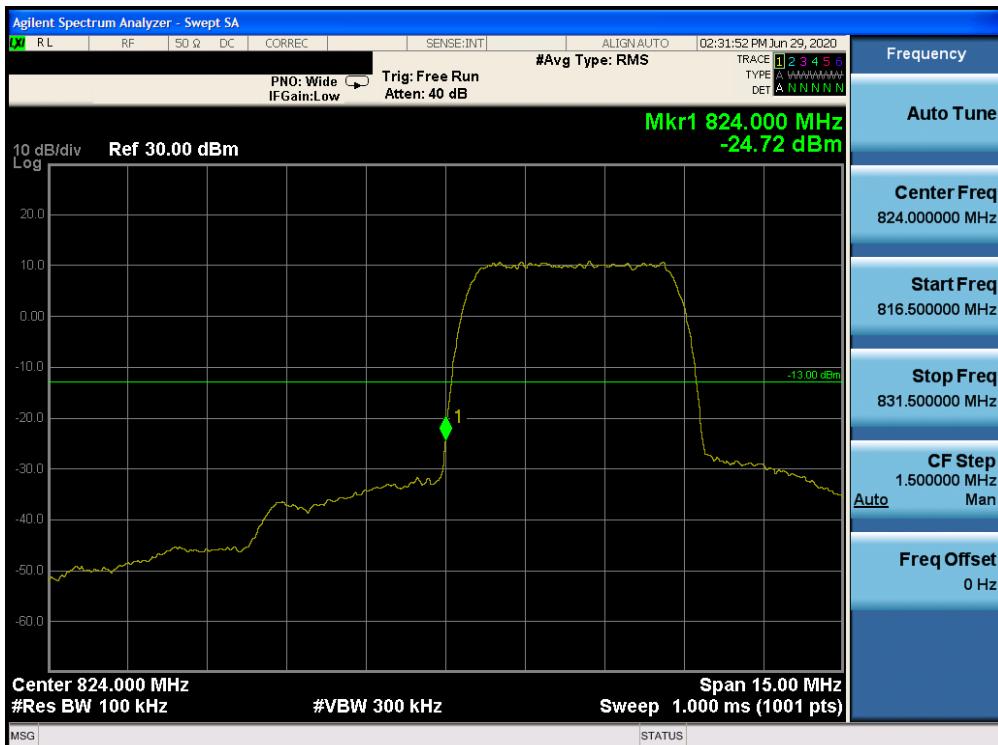

Plot 7-59. Band Edge Plot (Cellular WCDMA Mode - Low Channel)

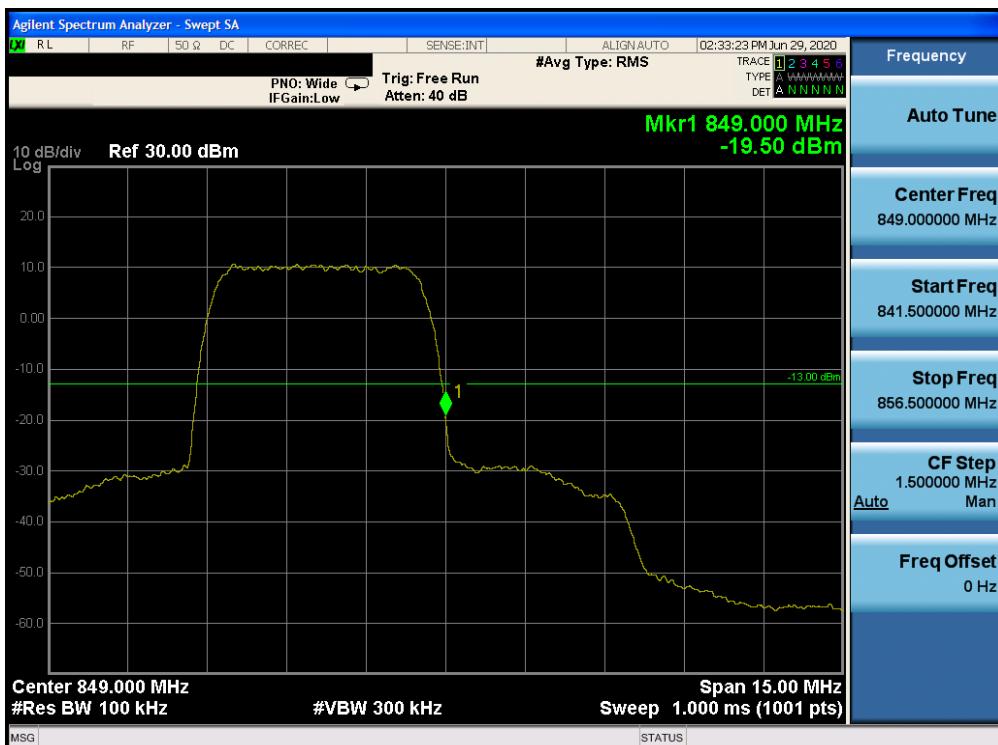


Plot 7-60. Band Edge Plot (Cellular WCDMA Mode - High Channel)

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 47 of 111	

## AWS WCDMA Mode



Plot 7-61. Band Edge Plot (AWS WCDMA Mode - Low Channel)

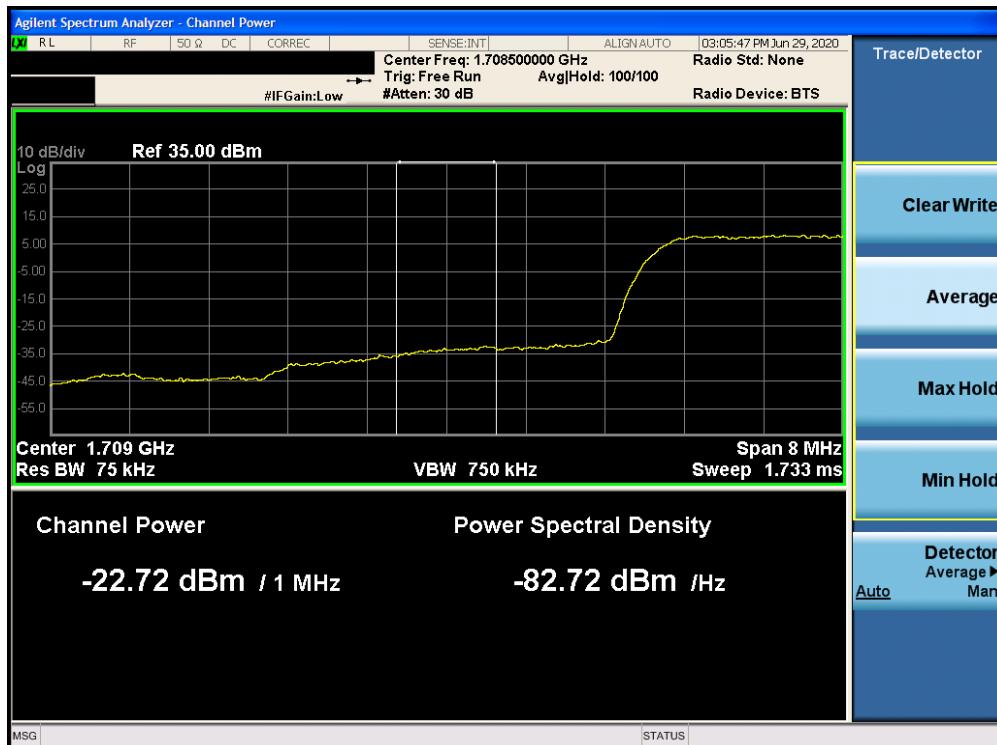


Plot 7-62. Extended Band Edge Plot (AWS WCDMA Mode - Low Channel)


FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device		Page 48 of 111



Plot 7-63. Band Edge Plot (AWS WCDMA Mode - High Channel)

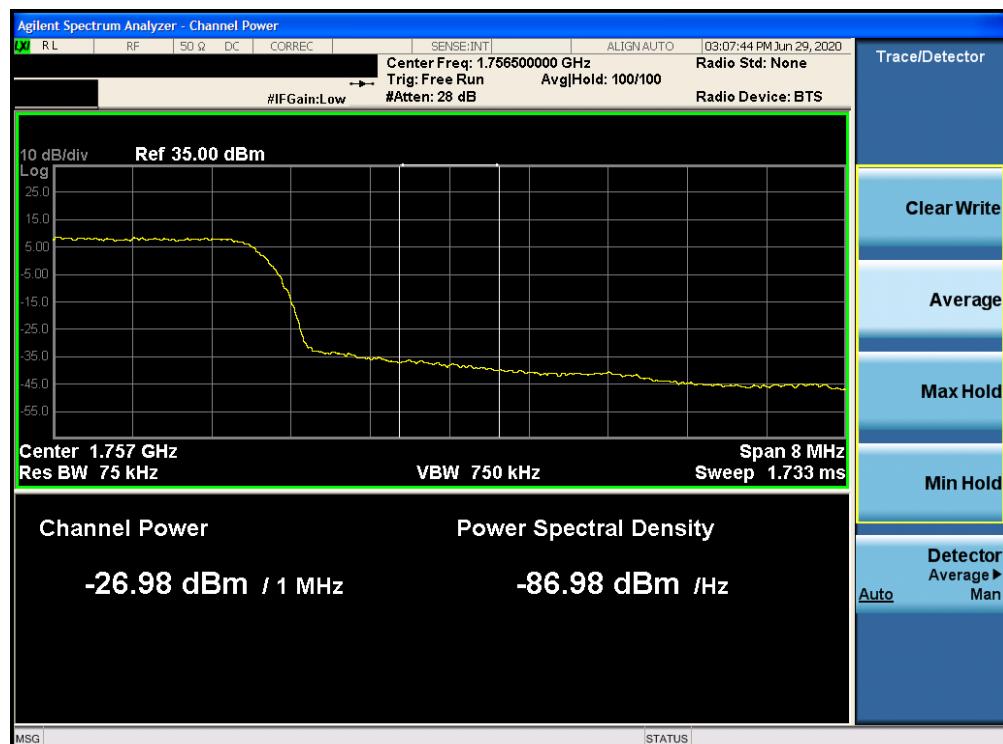


Plot 7-64. Extended Band Edge Plot (AWS WCDMA Mode - High Channel)

FCC ID: BCGA2324	 <b>PCTEST®</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 49 of 111

## PCS WCDMA Mode



Plot 7-65. Band Edge Plot (PCS WCDMA Mode - Low Channel)

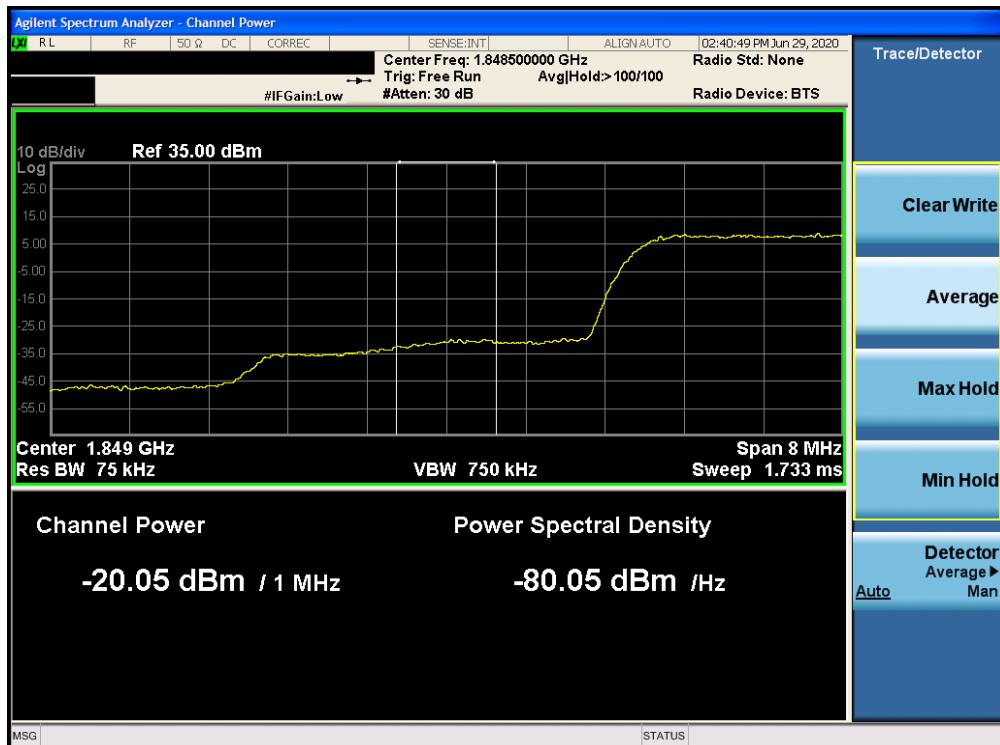


Plot 7-66. Extended Band Edge Plot (PCS WCDMA Mode - Low Channel)

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device		Page 50 of 111



Plot 7-67. Band Edge Plot (PCS WCDMA Mode - High Channel)

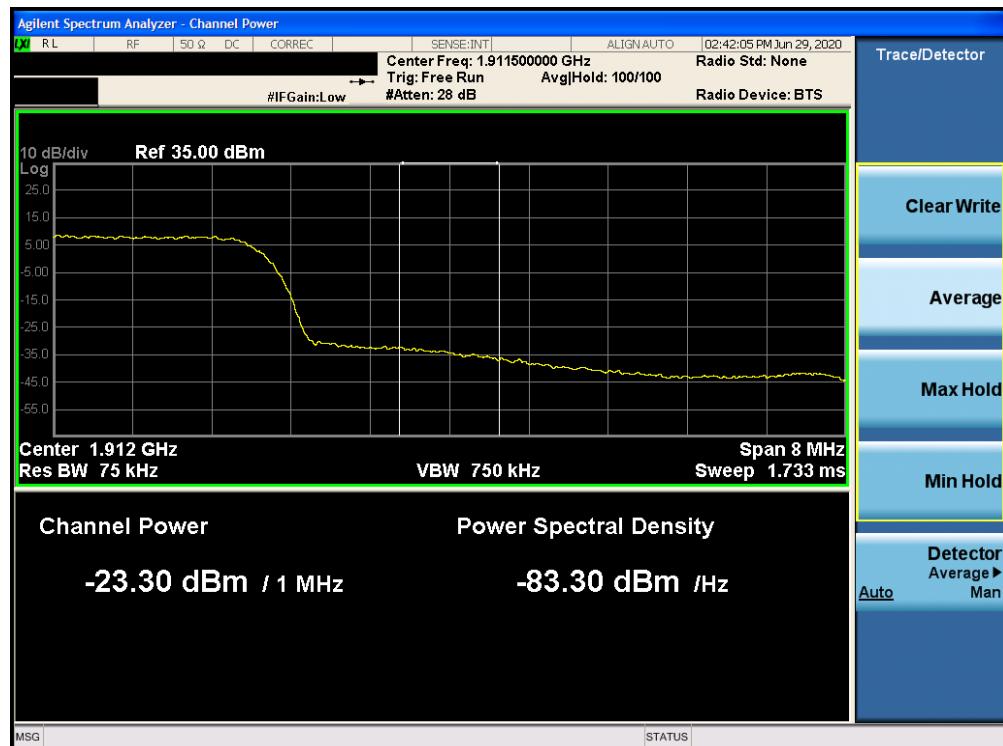

Plot 7-68. Extended Band Edge Plot (PCS WCDMA Mode - High Channel)

FCC ID: BCGA2324	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 51 of 111

## 7.5 Peak-Average Ratio

### Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 5.7.1

### Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

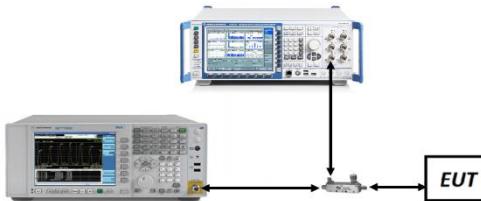

**Figure 7-4. Test Instrument & Measurement Setup**

### Test Notes

All ports were tested and only the worse case data were reported.

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device		Page 52 of 111


Mode	Average Power [dBm]	PAR at 0.1% [dB]	Limit [dB]	Margin [dB]
GPRS850	32.8	0.22	13.0	-12.78
EDGE850	27.25	0.24	13.0	-12.76
WCDMA850	25.42	3.25	13.0	-9.75
WCDMA1700	24.66	3.23	13.0	-9.77
GPRS1900	30.71	0.21	13.0	-12.79
EDGE1900	25.97	0.17	13.0	-12.83
WCDMA1900	24.6	3.24	13.0	-9.76

**Table 7-3. Peak to Average Ratio Results**




**Plot 7-69. Peak-Average Ratio Plot (Cellular GPRS Mode)**

FCC ID: BCGA2324	<b>PCTEST</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 53 of 111	

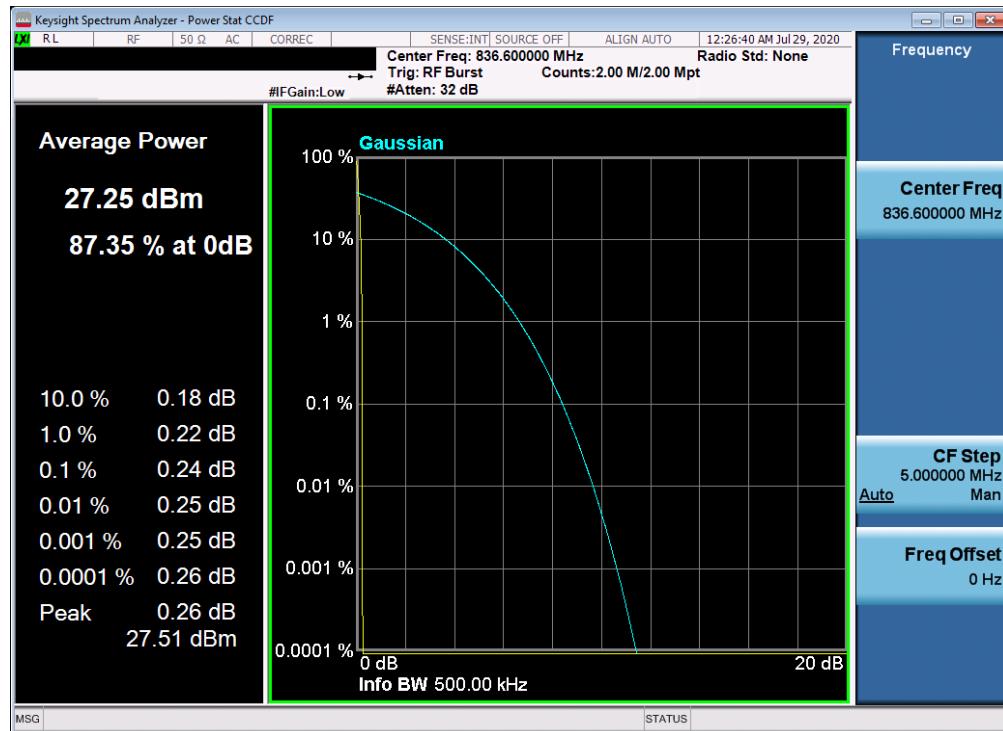


Plot 7-70. Peak-Average Ratio Plot (EDGE850 Mode)

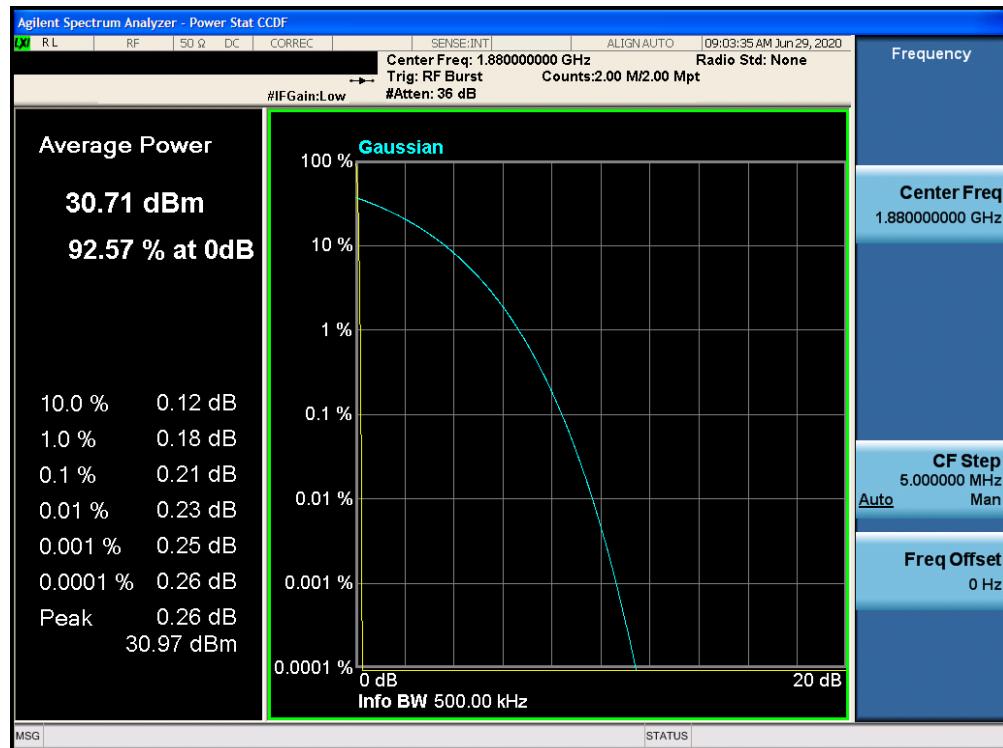

Plot 7-71. Peak-Average Ratio Plot (PCS GPRS Mode)

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 54 of 111	

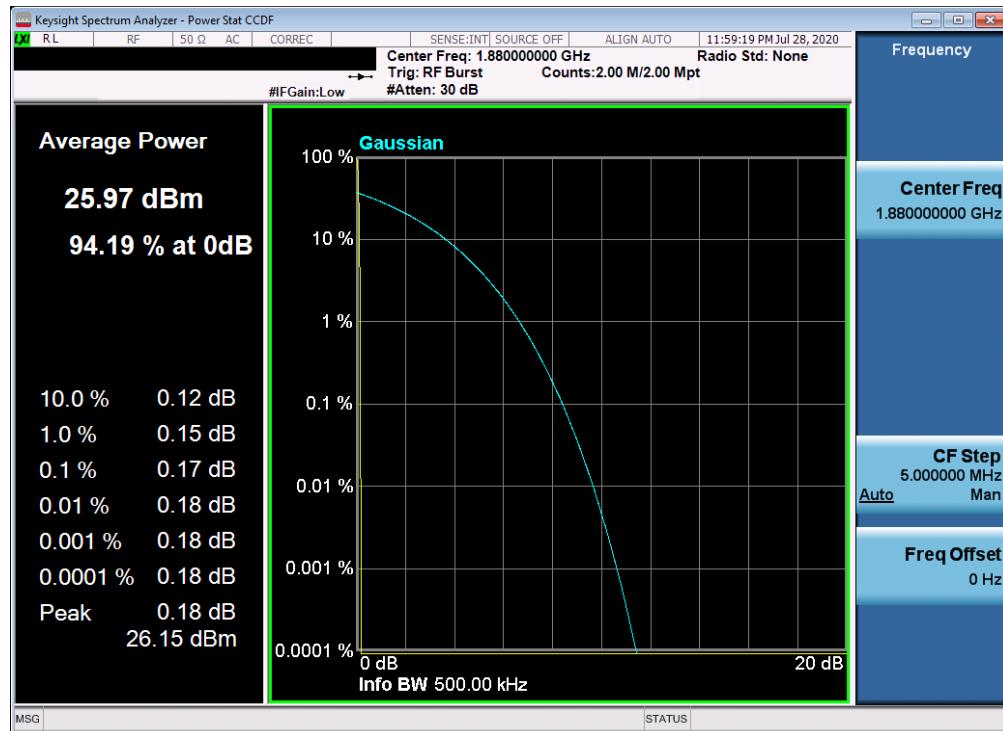

Plot 7-72. Peak-Average Ratio Plot (EDGE1900 Mode)



Plot 7-73. Peak-Average Ratio Plot (Cellular WCDMA Mode)

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 55 of 111	



**Plot 7-74. Peak-Average Ratio Plot (AWS WCDMA Mode)**



**Plot 7-75. Peak-Average Ratio Plot (PCS WCDMA Mode)**

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 56 of 111	
© 2020 PCTEST				V 10.2 04/22/2020

## 7.6 Radiated Power (ERP/EIRP)

### Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are calculated by adding highest antenna gain to maximum measured conducted output power. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

### Test Settings

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured is:

$$\text{ERP/EIRP} = \text{PMes} - \text{LC} + \text{GT}$$

Where:

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMes, typically dBW or dBm)

PMes = measured transmitter output power or PSD, in dBW or dBm

LC = signal attenuation in the connecting cable between the transmitter and antenna in dB

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-5. ERP/EIRP Measurement Setup**

### Test Notes

1. This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
2. This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
3. The Ant. Gains (GT) are listed in dBi.

FCC ID: BCGA2324	 <b>PCTEST</b> <sup>®</sup> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 57 of 111	
© 2020 PCTEST				V 10.2 04/22/2020

### 7.6.1 Antenna 4 - ERP/EIRP

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
824.20	GPRS850	32.93	-1.50	<b>29.28</b>	<b>0.847</b>	38.45	-9.17	<b>31.43</b>	<b>1.390</b>	40.61	-9.18
836.60	GPRS850	32.92	-1.50	29.27	0.845	38.45	-9.18	31.42	1.387	40.61	-9.19
848.80	GPRS850	32.89	-1.50	29.24	0.839	38.45	-9.21	31.39	1.377	40.61	-9.22
824.20	EDGE850	27.44	-1.50	<b>23.79</b>	0.239	38.45	-14.66	<b>25.94</b>	<b>0.393</b>	40.61	-14.67

**Table 7-4. ERP/EIRP (Cellular GPRS)**

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
826.40	WCDMA850	25.41	-1.50	21.76	0.150	38.45	-16.69	23.91	0.246	40.61	-16.70
836.60	WCDMA850	25.45	-1.50	<b>21.80</b>	<b>0.151</b>	38.45	-16.65	<b>23.95</b>	<b>0.248</b>	40.61	-16.66
846.60	WCDMA850	25.40	-1.50	21.75	0.150	38.45	-16.70	23.90	0.245	40.61	-16.71

**Table 7-5. ERP/EIRP (Cellular WCDMA)**

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1712.40	WCDMA1700	24.49	0.60	<b>25.09</b>	<b>0.323</b>	30.00	-4.91
1732.60	WCDMA1700	24.36	0.60	24.96	0.313	30.00	-5.04
1752.60	WCDMA1700	24.48	0.60	25.08	0.322	30.00	-4.92


**Table 7-6. EIRP (AWS WCDMA)**

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GPRS1900	31.00	-0.20	<b>30.80</b>	<b>1.202</b>	33.01	-2.21
1880.00	GPRS1900	30.96	-0.20	30.76	1.191	33.01	-2.25
1909.80	GPRS1900	30.74	-0.20	30.54	1.132	33.01	-2.47
1850.20	EDGE1900	26.00	-0.20	25.80	0.380	33.01	-7.21

**Table 7-7. EIRP (PCS GPRS)**

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	24.41	-0.20	<b>24.21</b>	<b>0.264</b>	33.01	-8.80
1880.00	WCDMA1900	24.40	-0.20	24.20	0.263	33.01	-8.81
1907.60	WCDMA1900	24.37	-0.20	24.17	0.261	33.01	-8.84

**Table 7-8. EIRP (PCS WCDMA)**

FCC ID: BCGA2324	 <b>PCTEST®</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)						Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device						

## 7.6.2 Antenna 3b – ERP/EIRP

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
824.20	GPRS850	31.69	-1.60	27.94	0.622	38.45	-10.51	30.09	1.021	40.61	-10.52
836.60	GPRS850	31.70	-1.60	<b>27.95</b>	<b>0.624</b>	38.45	-10.50	<b>30.10</b>	<b>1.023</b>	40.61	-10.51
848.80	GPRS850	31.62	-1.60	27.87	0.612	38.45	-10.58	30.02	1.005	40.61	-10.59
836.60	EDGE850	25.77	-1.60	<b>22.02</b>	0.159	38.45	-16.43	<b>24.17</b>	0.261	40.61	-16.44

Table 7-9. ERP/EIRP (Cellular GPRS)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
826.40	WCDMA850	24.41	-1.60	20.66	0.116	38.45	-17.79	22.81	0.191	40.61	-17.80
836.60	WCDMA850	24.55	-1.60	<b>20.80</b>	<b>0.120</b>	38.45	-17.65	<b>22.95</b>	<b>0.197</b>	40.61	-17.66
846.60	WCDMA850	24.27	-1.60	20.52	0.113	38.45	-17.93	22.67	0.185	40.61	-17.94

Table 7-10. ERP/EIRP (Cellular WCDMA)

FCC ID: BCGA2324	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)				Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device				Page 59 of 111

### 7.6.3 Antenna 2a - EIRP

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1712.40	WCDMA1700	23.81	-2.00	21.81	0.152	30.00	-8.19
1732.50	WCDMA1700	23.89	-2.00	<b>21.89</b>	<b>0.155</b>	30.00	-8.11
1752.50	WCDMA1700	23.88	-2.00	21.88	0.154	30.00	-8.12

Table 7-11. EIRP (AWS WCDMA)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GPRS1900	29.88	-1.20	28.68	0.738	33.01	-4.33
1880.00	GPRS1900	29.90	-1.20	<b>28.70</b>	<b>0.741</b>	33.01	-4.31
1909.80	GPRS1900	29.84	-1.20	28.64	0.731	33.01	-4.37
1880.00	EDGE1900	22.79	-1.20	<b>21.59</b>	0.144	33.01	-11.42

Table 7-12. EIRP (PCS GPRS)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	23.84	-1.20	22.64	0.184	33.01	-10.37
1880.00	WCDMA1900	23.95	-1.20	22.75	0.188	33.01	-10.26
1907.60	WCDMA1900	23.98	-1.20	<b>22.78</b>	<b>0.190</b>	33.01	-10.23

Table 7-13. EIRP (PCS WCDMA)

FCC ID: BCGA2324	 <b>PCTEST®</b> Proud to be part of 			MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020		EUT Type: Tablet Device			Page 60 of 111	

#### 7.6.4 Antenna 1a - EIRP

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1712.40	WCDMA1700	24.38	0.50	24.88	0.308	30.00	-5.12
1732.50	WCDMA1700	24.50	0.50	<b>25.00</b>	<b>0.316</b>	30.00	-5.00
1752.50	WCDMA1700	24.46	0.50	24.96	0.313	30.00	-5.04

Table 7-14. EIRP (AWS WCDMA)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GPRS1900	30.71	0.80	<b>31.51</b>	<b>1.416</b>	33.01	-1.50
1880.00	GPRS1900	30.70	0.80	31.50	1.413	33.01	-1.51
1909.80	GPRS1900	30.50	0.80	31.30	1.349	33.01	-1.71
1850.20	EDGE1900	23.83	0.80	<b>24.63</b>	0.290	33.01	-8.38

Table 7-15. EIRP (PCS GPRS)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	24.50	0.80	<b>25.30</b>	<b>0.339</b>	33.01	-7.71
1880.00	WCDMA1900	24.48	0.80	25.28	0.337	33.01	-7.73
1907.60	WCDMA1900	24.49	0.80	25.29	0.338	33.01	-7.72

Table 7-16. EIRP (PCS WCDMA)

FCC ID: BCGA2324	 <b>PCTEST®</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 61 of 111

### 7.6.5 Antenna 3a - EIRP

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1712.40	WCDMA1700	23.75	-3.10	<b>20.65</b>	<b>0.116</b>	30.00	-9.35
1732.50	WCDMA1700	23.63	-3.10	20.53	0.113	30.00	-9.47
1752.50	WCDMA1700	23.67	-3.10	20.57	0.114	30.00	-9.43

Table 7-17. EIRP (AWS WCDMA)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GPRS1900	29.98	-4.10	<b>25.88</b>	<b>0.387</b>	33.01	-7.13
1880.00	GPRS1900	29.87	-4.10	25.77	0.378	33.01	-7.24
1909.80	GPRS1900	29.79	-4.10	25.69	0.371	33.01	-7.32
1850.20	EDGE1900	24.76	-4.10	<b>20.66</b>	0.116	33.01	-12.35

Table 7-18. EIRP (PCS GPRS)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	23.75	-4.10	<b>19.65</b>	<b>0.092</b>	33.01	-13.36
1880.00	WCDMA1900	23.75	-4.10	<b>19.65</b>	<b>0.092</b>	33.01	-13.36
1907.60	WCDMA1900	23.60	-4.10	19.50	0.089	33.01	-13.51

Table 7-19. EIRP (PCS WCDMA)

FCC ID: BCGA2324	 <b>PCTEST®</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device			

## 7.7 Radiated Spurious Emissions

### Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI C63.26-2015 and TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI C63.26-2015

TIA-603-E-2016 – Section 2.2.12


### Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq$  3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq$  2 x span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize


FCC ID: BCGA2324	 <b>PCTEST</b> Proud to be part of  element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 63 of 111	

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

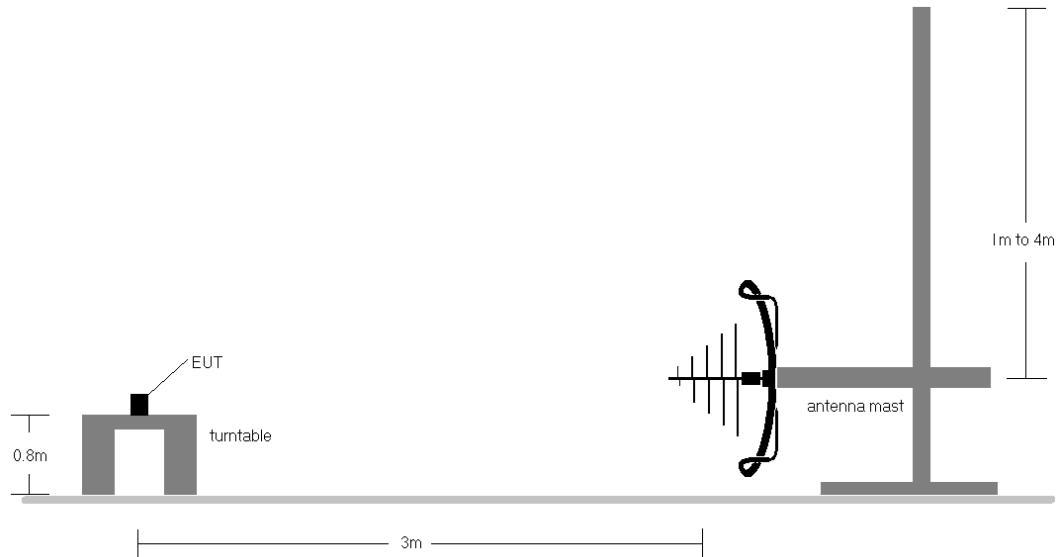

**Figure 7-6. Test Instrument & Measurement Setup < 1GHz**

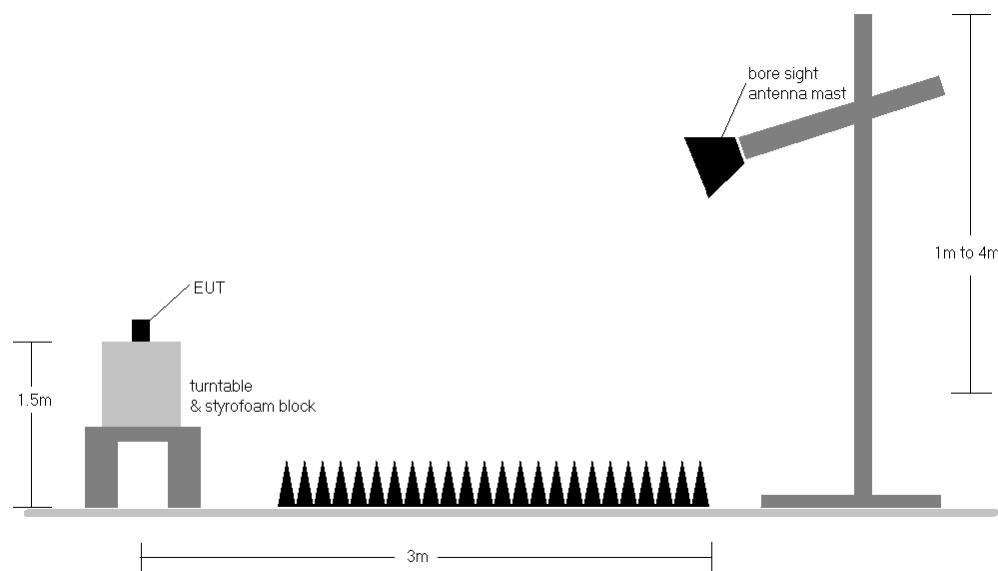

**Figure 7-7. Test Instrument & Measurement Setup > 1 GHz**

FCC ID: BCGA2324	 <b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device		Page 64 of 111


## Test Notes

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 3) This unit was tested with its standard battery.
- 4) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 5) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 6) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 7) The "-" shown in the following RSE tables are used to denote a noise floor measurement.
- 8) No significant emissions were found for below 1GHz and Above 18GHz measurement.


FCC ID: BCGA2324	 <b>PCTEST</b> Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device		Page 65 of 111

## 7.7.1 Antenna 4 Radiated Spurious Emissions Measurements

### Cellular GPRS Mode

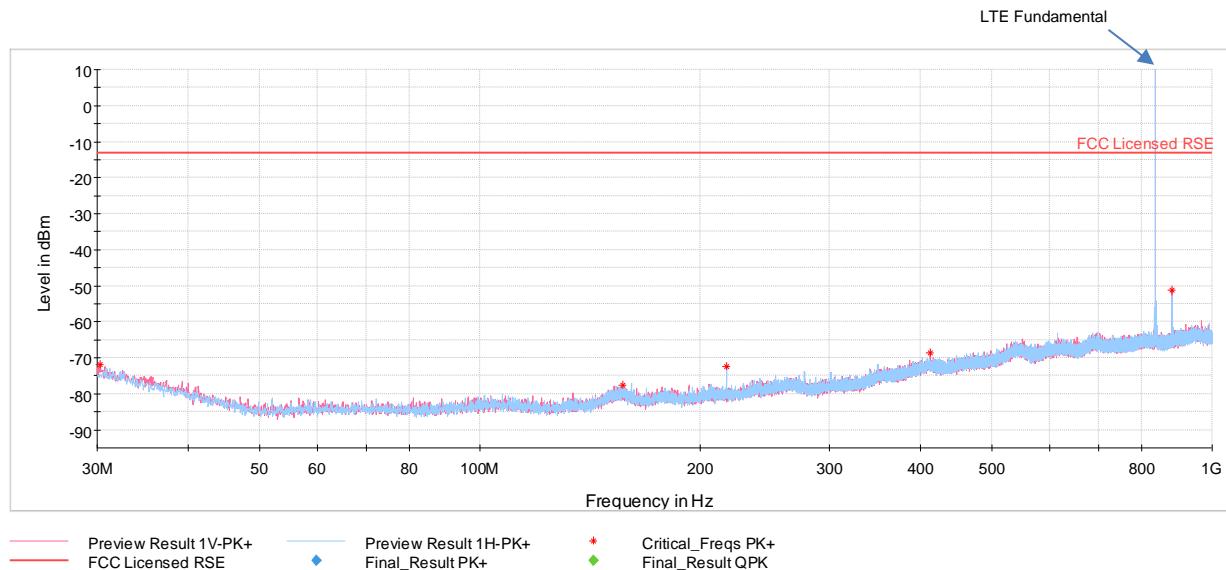

**Plot 7-76. Radiated Spurious Emissions below 1GHz (Cellular GPRS Mode)**

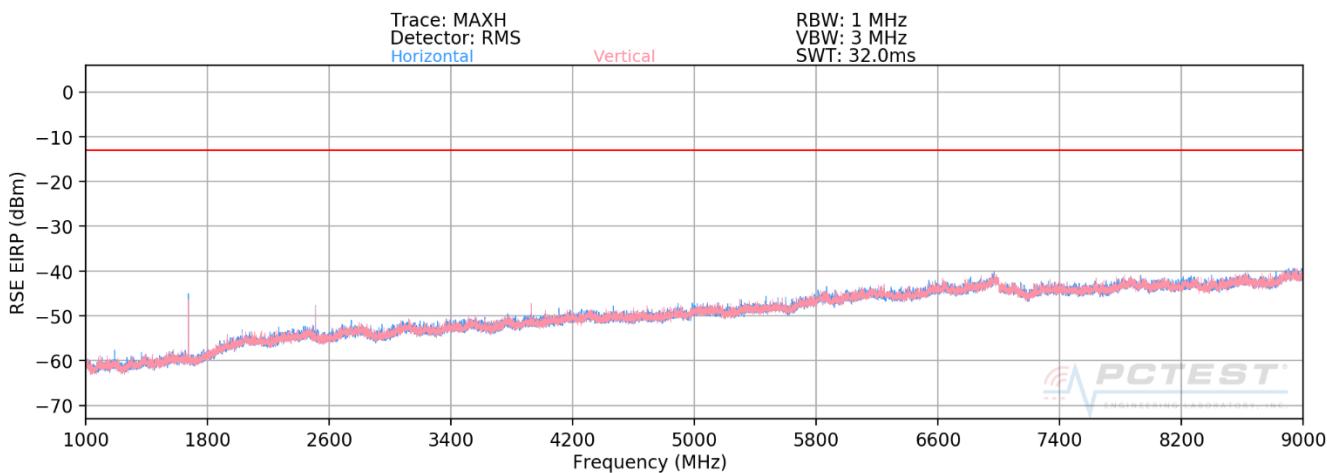

**Plot 7-77. Radiated Spurious Emissions above 1GHz (Cellular GPRS Mode)**

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device		Page 66 of 111

OPERATING FREQUENCY:	824.20	MHz
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1648.40	H	264	341	-59.89	3.92	-55.97	-43.0
2472.60	H	150	189	-45.91	4.25	-41.66	-28.7
3296.80	H	-	-	-68.21	6.48	-61.73	-48.7
4121.00	H	-	-	-68.68	7.83	-60.85	-47.8
4945.20	H	-	-	-59.26	8.84	-50.43	-37.4

**Table 7-20. Radiated Spurious Data (Cellular GPRS Mode – Ch. 128)**

OPERATING FREQUENCY:	836.60	MHz
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	H	18	183	-49.41	3.69	-45.72	-32.7
2509.80	H	275	250	-47.31	4.20	-43.11	-30.1
3346.40	H	-	-	-68.16	6.55	-61.61	-48.6
4183.00	H	-	-	-68.23	7.97	-60.26	-47.3
5019.60	H	-	-	-68.13	8.86	-59.27	-46.3

**Table 7-21. Radiated Spurious Data (Cellular GPRS Mode – Ch. 190)**

FCC ID: BCGA2324	 <b>PCTEST®</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 67 of 111


OPERATING FREQUENCY:	848.80		MHz
MODULATION SIGNAL:	GPRS (GMSK)		
DISTANCE:	3 meters		
LIMIT:	-13 dBm		

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1697.60	H	77	250	-63.75	3.78	-59.97	-47.0
2546.40	H	7	171	-58.68	4.40	-54.27	-41.3
3395.20	H	180	7	-47.62	6.62	-41.00	-28.0
4244.00	H	279	230	-58.70	8.05	-50.65	-37.6
5092.80	H	-	-	-60.87	8.96	-51.91	-38.9
5941.60	H	-	-	-58.72	9.57	-49.16	-36.2


Table 7-22. Radiated Spurious Data (Cellular GPRS Mode – Ch. 251)

FCC ID: BCGA2324	 <b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device		

## Cellular WCDMA Mode

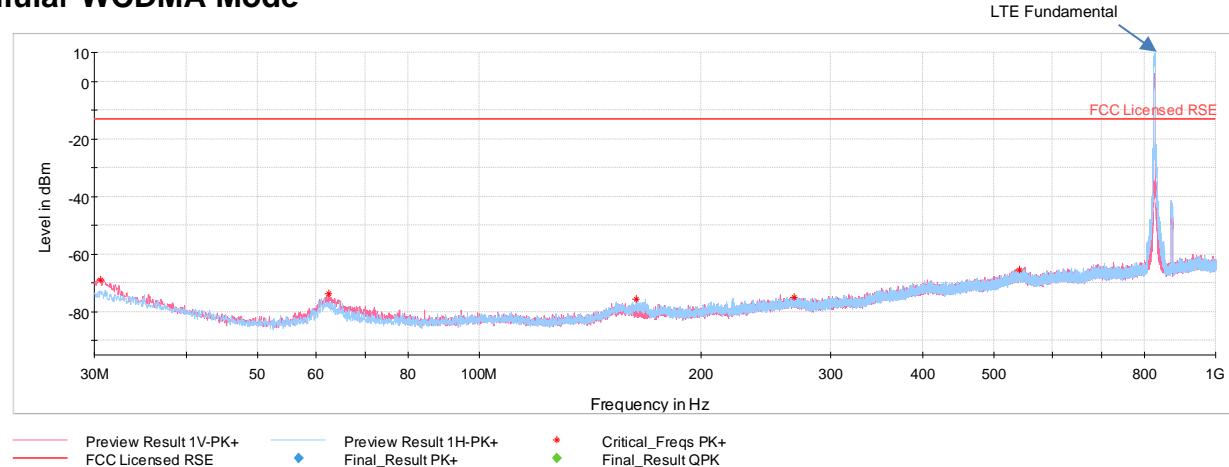

**Plot 7-78. Radiated Spurious Emissions below 1GHz (Cellular WCDMA Mode)**

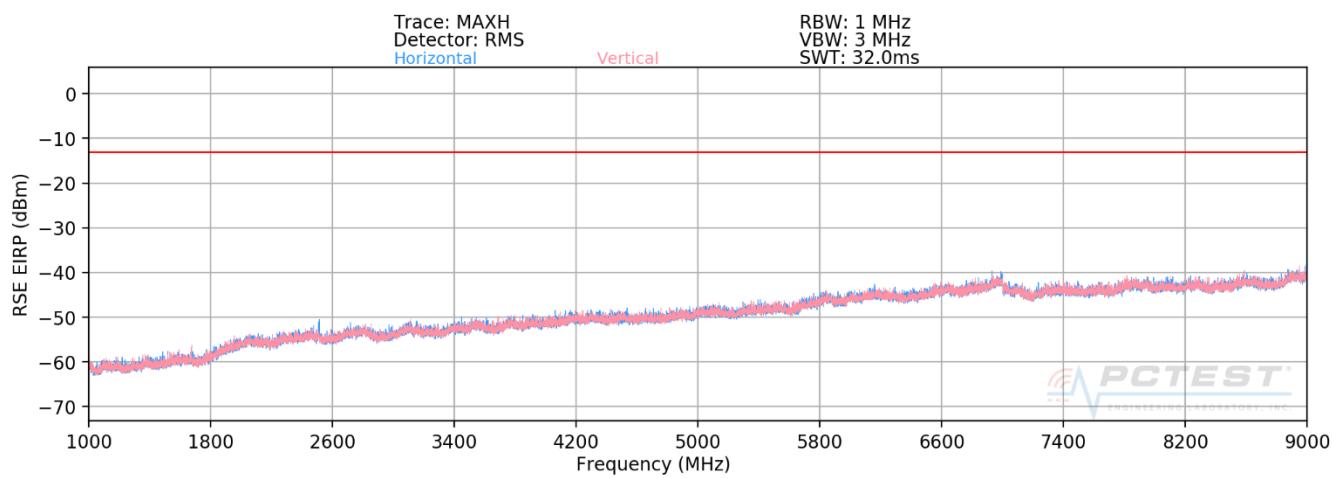

**Plot 7-79. Radiated Spurious Emissions above 1GHz (Cellular WCDMA Mode)**

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 69 of 111	

OPERATING FREQUENCY: 826.40 MHz  
MODULATION SIGNAL: WCDMA  
DISTANCE: 3 meters  
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1652.80	H	-	-	-63.18	3.89	-59.29	-46.3
2479.20	H	72	173	-56.33	4.34	-51.99	-39.0
3305.60	H	-	-	-58.67	6.50	-52.17	-39.2
4132.00	H	-	-	-60.48	7.85	-52.62	-39.6
4958.40	H	-	-	-60.01	8.84	-51.17	-38.2

Table 7-23. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4132)

OPERATING FREQUENCY: 836.60 MHz  
MODULATION SIGNAL: WCDMA  
DISTANCE: 3 meters  
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	H	152	89	-67.21	3.69	-63.52	-50.5
2509.80	H	159	89	-59.16	4.20	-54.96	-42.0
3346.40	H	-	-	-68.38	6.55	-61.83	-48.8
4183.00	H	-	-	-68.36	7.97	-60.39	-47.4
5019.60	H	-	-	-68.23	8.86	-59.37	-46.4

Table 7-24. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4183)

FCC ID: BCGA2324	 <b>PCTEST®</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 70 of 111


OPERATING FREQUENCY:	846.60	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1693.20	H	354	180	-53.58	3.74	-49.84	-36.8
2539.80	H	100	1	-58.87	4.41	-54.46	-41.5
3386.40	H	-	-	-68.05	6.61	-61.44	-48.4
4233.00	H	-	-	-68.74	8.04	-60.70	-47.7
5079.60	H	-	-	-68.52	8.95	-59.58	-46.6

Table 7-25. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4233)

FCC ID: BCGA2324	 <b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020		EUT Type: Tablet Device	Page 71 of 111

## AWS WCDMA Mode

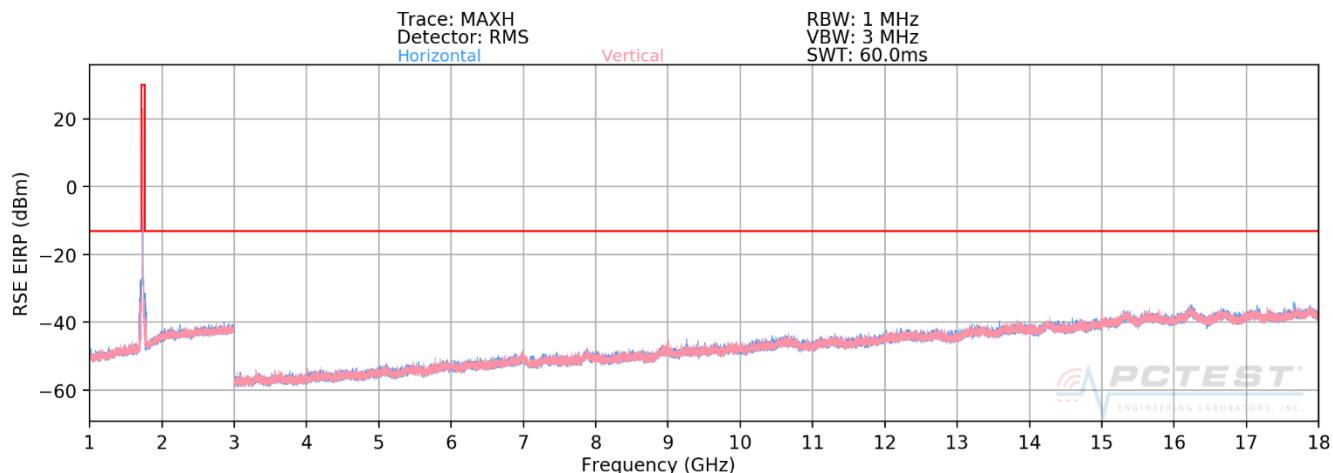

Plot 7-80. Radiated Spurious Emissions above 1GHz (AWS WCDMA Mode)

OPERATING FREQUENCY: 1712.40 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3424.80	H	104	341	-66.46	6.67	-59.80	-46.8
5137.20	H	-	-	-69.09	9.04	-60.05	-47.0
6849.60	H	-	-	-65.76	9.59	-56.17	-43.2
8562.00	H	-	-	-64.70	9.65	-55.05	-42.0

Table 7-26. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1312)

FCC ID: BCGA2324	 <b>PCTEST</b> Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020		EUT Type: Tablet Device	Page 72 of 111

OPERATING FREQUENCY:	1732.60		MHz
MODULATION SIGNAL:	WCDMA		
DISTANCE:	3 meters		
LIMIT:	-13 dBm		

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3465.20	V	162	29	-67.75	6.73	-61.02	-48.0
5197.80	V	-	-	-68.89	9.15	-59.74	-46.7
6930.40	V	-	-	-64.97	9.51	-55.47	-42.5
8663.00	V	-	-	-64.77	9.63	-55.14	-42.1

**Table 7-27. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1413)**


OPERATING FREQUENCY:	1752.60		MHz
MODULATION SIGNAL:	WCDMA		
DISTANCE:	3 meters		
LIMIT:	-13 dBm		

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3505.20	V	126	344	-67.90	6.81	-61.09	-48.1
5257.80	V	-	-	-69.09	9.15	-59.94	-46.9
7010.40	V	-	-	-67.00	9.48	-57.53	-44.5
8763.00	V	-	-	-65.44	9.63	-55.81	-42.8

**Table 7-28. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1513)**

FCC ID: BCGA2324	 <b>PCTEST®</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 73 of 111

## PCS GPRS Mode

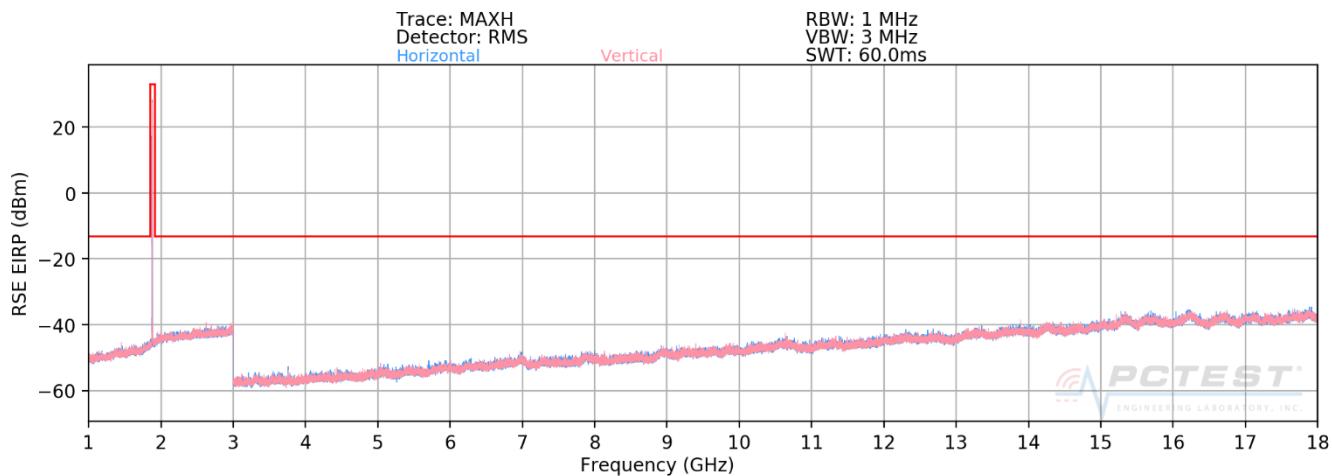

Plot 7-81. Radiated Spurious Emissions above 1GHz (PCS GPRS Mode)

OPERATING FREQUENCY: 1850.20 MHz  
 MODULATION SIGNAL: GPRS (GMSK)  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3700.40	H	-	-	-60.10	7.29	-52.81	-39.8
5550.60	H	-	-	-59.24	9.32	-49.92	-36.9
7400.80	H	-	-	-60.09	9.43	-50.67	-37.7
9251.00	H	-	-	-57.58	9.54	-48.04	-35.0

Table 7-29. Radiated Spurious Data (PCS GPRS Mode – Ch. 512)

FCC ID: BCGA2324	 <b>PCTEST</b> Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 74 of 111	

OPERATING FREQUENCY:	1880.00		MHz
MODULATION SIGNAL:	GPRS (GMSK)		
DISTANCE:	3 meters		
LIMIT:	-13 dBm		

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	249	322	-54.31	7.30	-47.01	-34.0
5640.00	H	165	353	-58.80	9.37	-49.43	-36.4
7520.00	H	363	114	-58.74	9.44	-49.30	-36.3
9400.00	H	-	-	-57.74	9.55	-48.20	-35.2
11280.00	H	-	-	-55.11	9.64	-45.47	-32.5

**Table 7-30. Radiated Spurious Data (PCS GPRS Mode – Ch. 661)**


OPERATING FREQUENCY:	1909.80		MHz
MODULATION SIGNAL:	GPRS (GMSK)		
DISTANCE:	3 meters		
LIMIT:	-13 dBm		

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3819.60	H	-	-	-60.94	7.41	-53.53	-40.5
5729.40	H	-	-	-59.58	9.42	-50.17	-37.2
7639.20	H	-	-	-60.43	9.39	-51.04	-38.0

**Table 7-31. Radiated Spurious Data (PCS GPRS Mode – Ch. 810)**

FCC ID: BCGA2324	 <b>PCTEST®</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 75 of 111

## PCS WCDMA Mode

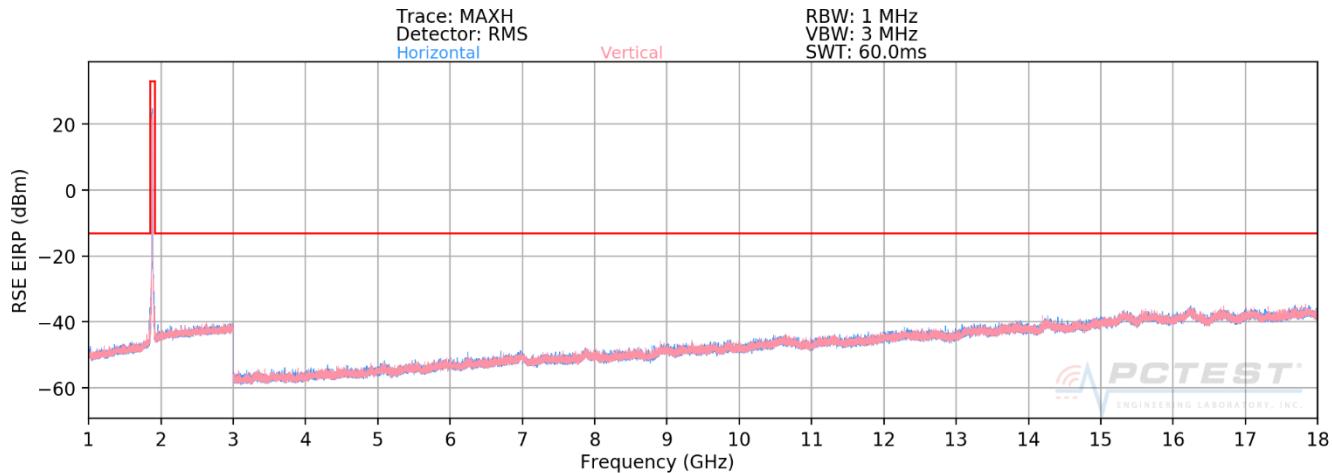

Plot 7-82. Radiated Spurious Emissions above 1GHz (PCS WCDMA Mode)

OPERATING FREQUENCY: 1852.40 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3704.80	H	-	-	-69.72	7.29	-62.43	-49.4
5557.20	H	-	-	-68.77	9.33	-59.43	-46.4
7409.60	H	-	-	-65.74	9.43	-56.31	-43.3

Table 7-32. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)

FCC ID: BCGA2324	 <b>PCTEST</b> Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020		EUT Type: Tablet Device	Page 76 of 111

OPERATING FREQUENCY:	1880.00	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	-	-	-69.79	7.30	-62.49	-49.5
5640.00	H	-	-	-69.42	9.37	-60.05	-47.0
7520.00	H	-	-	-66.07	9.44	-56.63	-43.6

Table 7-33. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)

OPERATING FREQUENCY:	1907.60	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3815.20	H	-	-	-70.15	7.39	-62.75	-49.8
5722.80	H	-	-	-69.00	9.40	-59.60	-46.6
7630.40	H	-	-	-66.06	9.39	-56.67	-43.7

Table 7-34. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)

FCC ID: BCGA2324	 <b>PCTEST®</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 77 of 111

## 7.7.2 Antenna 3b Radiated Spurious Emissions Measurements

### Cellular GPRS Mode

OPERATING FREQUENCY:	824.20	MHz
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1648.40	H	-	-	-54.25	3.92	-50.33	-37.3
2472.60	H	-	-	-52.97	4.25	-48.72	-35.7
3296.80	H	-	-	-60.03	6.48	-53.55	-40.6

Table 7-35. Radiated Spurious Data (Cellular GPRS Mode – Ch. 128)

OPERATING FREQUENCY:	836.60	MHz
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	H	-	-	-46.43	3.69	-42.74	-29.7
2509.80	H	-	-	-50.75	4.20	-46.55	-33.5
3346.40	H	-	-	-60.08	6.55	-53.53	-40.5

Table 7-36. Radiated Spurious Data (Cellular GPRS Mode – Ch. 190)

FCC ID: BCGA2324	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 78 of 111

OPERATING FREQUENCY:	848.80	MHz
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1697.60	V	190	158	-55.21	4.57	-50.64	-37.6
2546.40	H	186	161	-50.62	4.63	-45.99	-33.0
3395.20	V	194	324	-59.77	6.84	-52.93	-39.9
4244.00	V	-	-	-60.77	8.10	-52.67	-39.7
5092.80	V	-	-	-60.43	8.96	-51.48	-38.5

Table 7-37. Radiated Spurious Data (Cellular GPRS Mode – Ch. 251)

FCC ID: BCGA2324	 <b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020		EUT Type: Tablet Device	Page 79 of 111

## Cellular WCDMA Mode

OPERATING FREQUENCY:	826.40	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1652.80	H	-	-	-63.31	3.89	-59.42	-46.4
2479.20	H	-	-	-58.46	4.34	-54.12	-41.1
3305.60	H	-	-	-60.55	6.50	-54.05	-41.1

Table 7-38. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4132)

OPERATING FREQUENCY:	836.60	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	H	-	-	-59.50	3.69	-55.81	-42.8
2509.80	H	-	-	-58.23	4.20	-54.03	-41.0
3346.40	H	-	-	-60.19	6.55	-53.64	-40.6

Table 7-39. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4183)

FCC ID: BCGA2324	 <b>PCTEST®</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 80 of 111

OPERATING FREQUENCY:	846.60	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1693.20	H	-	-	-51.15	3.74	-47.41	-34.4
2539.80	H	-	-	-55.33	4.41	-50.92	-37.9
3386.40	H	-	-	-59.63	6.61	-53.02	-40.0

**Table 7-40. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4233)**

FCC ID: BCGA2324	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 81 of 111

### 7.7.3 Antenna 2a Radiated Spurious Emissions Measurements

#### AWS WCDMA Mode

OPERATING FREQUENCY:	1712.40	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3424.80	H	-	-	-59.67	6.67	-53.01	-40.0
5137.20	H	-	-	-60.37	9.04	-51.33	-38.3
6849.60	H	-	-	-57.74	9.59	-48.15	-35.2

Table 7-41. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1312)

OPERATING FREQUENCY:	1732.60	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3465.20	H	-	-	-59.86	6.73	-53.13	-40.1
5197.80	H	-	-	-60.81	9.15	-51.66	-38.7
6930.40	H	-	-	-57.66	9.51	-48.16	-35.2

Table 7-42. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1413)

FCC ID: BCGA2324	 <b>PCTEST®</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 82 of 111

OPERATING FREQUENCY:	1752.60	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3505.20	H	-	-	-59.91	6.81	-53.10	-40.1
5257.80	H	-	-	-60.92	9.15	-51.77	-38.8
7010.40	H	-	-	-60.55	9.48	-51.08	-38.1

**Table 7-43. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1513)**

FCC ID: BCGA2324	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 83 of 111

## PCS GPRS Mode

OPERATING FREQUENCY:	1850.20		MHz
MODULATION SIGNAL:	GPRS (GMSK)		
DISTANCE:	3	meters	
LIMIT:	-13	dBm	

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3700.40	H	-	-	-60.83	7.29	-53.54	-40.5
5550.60	H	-	-	-60.11	9.32	-50.79	-37.8
7400.80	H	-	-	-60.16	9.43	-50.74	-37.7

Table 7-44. Radiated Spurious Data (PCS GPRS Mode – Ch. 512)

OPERATING FREQUENCY:	1880.00		MHz
MODULATION SIGNAL:	GPRS (GMSK)		
DISTANCE:	3	meters	
LIMIT:	-13	dBm	

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	-	-	-60.12	7.30	-52.82	-39.8
5640.00	H	-	-	-60.65	9.37	-51.28	-38.3
7520.00	H	-	-	-59.76	9.44	-50.32	-37.3

Table 7-45. Radiated Spurious Data (PCS GPRS Mode – Ch. 661)

FCC ID: BCGA2324	 <b>PCTEST<sup>®</sup></b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 84 of 111

OPERATING FREQUENCY:	1909.80		MHz
MODULATION SIGNAL:	GPRS (GMSK)		
DISTANCE:	3 meters		
LIMIT:	-13 dBm		

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3819.60	H	-	-	-59.72	7.41	-52.31	-39.3
5729.40	H	-	-	-59.58	9.42	-50.17	-37.2
7639.20	H	-	-	-60.38	9.39	-50.99	-38.0

**Table 7-46. Radiated Spurious Data (PCS GPRS Mode – Ch. 810)**

FCC ID: BCGA2324	 <b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device		

## PCS WCDMA Mode

OPERATING FREQUENCY:	1852.40	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3704.80	H	-	-	-60.09	7.29	-52.80	-39.8
5557.20	H	-	-	-59.98	9.33	-50.64	-37.6
7409.60	H	-	-	-59.47	9.43	-50.04	-37.0

Table 7-47. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)

OPERATING FREQUENCY:	1880.00	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	-	-	-59.84	7.30	-52.54	-39.5
5640.00	H	-	-	-60.19	9.37	-50.82	-37.8
7520.00	H	-	-	-60.63	9.44	-51.19	-38.2

Table 7-48. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)

FCC ID: BCGA2324	 <b>PCTEST<sup>®</sup></b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 86 of 111

OPERATING FREQUENCY:	1907.60	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3815.20	H	-	-	-60.86	7.39	-53.46	-40.5
5722.80	H	-	-	-60.09	9.40	-50.69	-37.7
7630.40	H	-	-	-60.49	9.39	-51.10	-38.1

**Table 7-49. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)**

FCC ID: BCGA2324	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 87 of 111

## 7.7.4 Antenna 1a Radiated Spurious Emissions Measurements

### AWS WCDMA Mode

OPERATING FREQUENCY:	1712.40	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3424.80	H	-	-	-68.58	6.67	-61.92	-48.9
5137.20	H	337	354	-63.04	9.04	-54.00	-41.0
6849.60	H	-	-	-65.76	9.59	-56.17	-43.2
8562.00	H	-	-	-64.62	9.65	-54.97	-42.0

Table 7-50. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1312)

OPERATING FREQUENCY:	1732.60	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3465.20	V	-	-	-68.56	6.73	-61.83	-48.8
5197.80	V	2	129	-59.79	9.15	-50.64	-37.6
6930.40	V	-	-	-65.20	9.51	-55.70	-42.7
8663.00	V	-	-	-64.87	9.63	-55.24	-42.2

Table 7-51. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1413)

FCC ID: BCGA2324	 <b>PCTEST®</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 88 of 111

OPERATING FREQUENCY:	1752.60	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3505.20	V	-	-	-68.46	6.81	-61.65	-48.6
5257.80	V	-	-	-68.94	9.15	-59.79	-46.8
7010.40	V	-	-	-65.49	9.48	-56.02	-43.0

**Table 7-52. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1513)**

FCC ID: BCGA2324	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 89 of 111

## PCS GPRS Mode

OPERATING FREQUENCY:	1850.20	MHz
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3700.40	V	-	-	-58.90	7.29	-51.61	-38.6
5550.60	V	-	-	-56.27	9.32	-46.95	-33.9
7400.80	V	-	-	-59.68	9.43	-50.26	-37.3

Table 7-53. Radiated Spurious Data (PCS GPRS Mode – Ch. 512)

OPERATING FREQUENCY:	1880.00	MHz
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	-	-	-58.46	7.30	-51.16	-38.2
5640.00	H	-	-	-59.37	9.37	-50.00	-37.0
7520.00	H	-	-	-59.50	9.44	-50.06	-37.1

Table 7-54. Radiated Spurious Data (PCS GPRS Mode – Ch. 661)

FCC ID: BCGA2324	 <b>PCTEST<sup>®</sup></b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 90 of 111

OPERATING FREQUENCY: 1909.80 MHz  
MODULATION SIGNAL: GPRS (GMSK)  
DISTANCE: 3 meters  
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3819.60	H	-	-	-59.46	7.41	-52.05	-39.0
5729.40	H	-	-	-58.28	9.42	-48.87	-35.9
7639.20	H	-	-	-59.47	9.39	-50.08	-37.1

Table 7-55. Radiated Spurious Data (PCS GPRS Mode – Ch. 810)

FCC ID: BCGA2324	 <b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 91 of 111	

## PCS WCDMA Mode

OPERATING FREQUENCY:	1852.40	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3704.80	V	-	-	-68.74	7.29	-61.45	-48.4
5557.20	V	40	52	-60.52	9.33	-51.18	-38.2
7409.60	V	-	-	-65.34	9.43	-55.91	-42.9
9262.00	V	-	-	-62.91	9.54	-53.37	-40.4

Table 7-56. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)

OPERATING FREQUENCY:	1880.00	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	-	-	-68.46	7.30	-61.16	-48.2
5640.00	H	-	-	-68.55	9.37	-59.18	-46.2
7520.00	H	-	-	-65.58	9.44	-56.14	-43.1

Table 7-57. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)

FCC ID: BCGA2324	 <b>PCTEST<sup>®</sup></b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 92 of 111

OPERATING FREQUENCY: 1907.60 MHz  
MODULATION SIGNAL: WCDMA  
DISTANCE: 3 meters  
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3815.20	H	-	-	-68.69	7.39	-61.29	-48.3
5722.80	H	209	141	-67.76	9.40	-58.36	-45.4
7630.40	H	-	-	-65.65	9.39	-56.26	-43.3
9538.00	H	-	-	-63.08	9.56	-53.53	-40.5

**Table 7-58. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)**

FCC ID: BCGA2324	 PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 93 of 111	

## 7.7.5 Antenna 3a Radiated Spurious Emissions Measurements

### AWS WCDMA Mode

OPERATING FREQUENCY: 1712.40 MHz  
MODULATION SIGNAL: WCDMA  
DISTANCE: 3 meters  
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3424.80	V	-	-	-68.53	6.67	-61.87	-48.9
5137.20	V	-	-	-68.40	9.04	-59.36	-46.4
6849.60	V	-	-	-65.84	9.59	-56.25	-43.3

Table 7-59. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1312)

OPERATING FREQUENCY: 1732.60 MHz  
MODULATION SIGNAL: WCDMA  
DISTANCE: 3 meters  
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3465.20	V	-	-	-68.80	6.73	-62.07	-49.1
5197.80	V	-	-	-69.15	9.15	-60.00	-47.0
6930.40	V	-	-	-65.11	9.51	-55.61	-42.6

Table 7-60. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1413)

FCC ID: BCGA2324	 <b>PCTEST®</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 94 of 111

OPERATING FREQUENCY:	1752.60	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3505.20	V	-	-	-68.54	6.81	-61.73	-48.7
5257.80	V	-	-	-69.10	9.15	-59.95	-47.0
7010.40	V	-	-	-65.49	9.48	-56.02	-43.0

**Table 7-61. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1513)**

FCC ID: BCGA2324	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 95 of 111

## PCS GPRS Mode

OPERATING FREQUENCY:	1850.20	MHz
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3700.40	V	-	-	-58.98	7.29	-51.69	-38.7
5550.60	V	-	-	-57.53	9.32	-48.21	-35.2
7400.80	V	-	-	-59.26	9.43	-49.84	-36.8

Table 7-62. Radiated Spurious Data (PCS GPRS Mode – Ch. 512)

OPERATING FREQUENCY:	1880.00	MHz
MODULATION SIGNAL:	GPRS (GMSK)	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	V	-	-	-58.22	7.30	-50.92	-37.9
5640.00	V	-	-	-58.86	9.37	-49.49	-36.5
7520.00	V	-	-	-59.85	9.44	-50.41	-37.4

Table 7-63. Radiated Spurious Data (PCS GPRS Mode – Ch. 661)

FCC ID: BCGA2324	 <b>PCTEST<sup>®</sup></b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 96 of 111

OPERATING FREQUENCY:	1909.80		MHz
MODULATION SIGNAL:	GPRS (GMSK)		
DISTANCE:	3 meters		
LIMIT:	-13 dBm		

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3819.60	V	-	-	-59.29	7.41	-51.88	-38.9
5729.40	V	-	-	-58.85	9.42	-49.44	-36.4
7639.20	V	-	-	-59.80	9.39	-50.41	-37.4

**Table 7-64. Radiated Spurious Data (PCS GPRS Mode – Ch. 810)**

FCC ID: BCGA2324	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 97 of 111

## PCS WCDMA Mode

OPERATING FREQUENCY:	1852.40	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3704.80	V	-	-	-68.50	7.29	-61.21	-48.2
5557.20	V	-	-	-67.91	9.33	-58.57	-45.6
7409.60	V	-	-	-65.33	9.43	-55.90	-42.9

Table 7-65. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)

OPERATING FREQUENCY:	1880.00	MHz
MODULATION SIGNAL:	WCDMA	
DISTANCE:	3	meters
LIMIT:	-13	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	-	-	-68.49	7.30	-61.19	-48.2
5640.00	H	-	-	-68.47	9.37	-59.10	-46.1
7520.00	H	-	-	-65.66	9.44	-56.22	-43.2

Table 7-66. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)

FCC ID: BCGA2324	 <b>PCTEST<sup>®</sup></b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 98 of 111

OPERATING FREQUENCY:	1907.60		MHz
MODULATION SIGNAL:	WCDMA		
DISTANCE:	3 meters		
LIMIT:	-13 dBm		

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	EIRP Level at Sub Ant Port [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3815.20	H	-	-	-68.73	7.39	-61.33	-48.3
5722.80	H	-	-	-68.26	9.40	-58.86	-45.9
7630.40	H	-	-	-65.58	9.39	-56.19	-43.2

**Table 7-67. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)**

FCC ID: BCGA2324	 <b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device		

## 7.8 Frequency Stability / Temperature Variation

### Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015 and TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

**For Part 22, RSS-132, and RSS-133, the frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5 \text{ ppm}$ ) of the center frequency. For Part 24, Part 27, and RSS-139, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.**

### Test Procedure Used

ANSI C63.26 2015  
TIA-603-E-2016

### Test Settings

- The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### Test Setup



Figure 7-8. Test Instrument & Measurement Setup

### Test Notes

All ports were tested and only the worst case data were reported.

FCC ID: BCGA2324	PCTEST <sup>®</sup> Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 100 of 111	

## Frequency Stability / Temperature Variation

OPERATING FREQUENCY:	836,600,000	Hz
CHANNEL:	190	
REFERENCE VOLTAGE:	3.80	VDC
DEVIATION LIMIT:	± 0.00025 % or 2.5 ppm	

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	836,600,005	5	0.0000006
100 %		- 20	836,600,004	4	0.0000005
100 %		- 10	836,600,004	4	0.0000005
100 %		0	836,600,005	5	0.0000006
100 %		+ 10	836,600,004	4	0.0000005
100 %		+ 20	836,600,002	2	0.0000002
100 %		+ 30	836,600,001	1	0.0000002
100 %		+ 40	836,600,002	2	0.0000002
100 %		+ 50	836,600,001	1	0.0000001
BATT. ENDPOINT	3.40	+ 20	836,600,001	1	0.0000002

**Table 7-68. Frequency Stability Data (Cellular GPRS Mode – Ch. 190)**

FCC ID: BCGA2324	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 101 of 111

## Frequency Stability / Temperature Variation

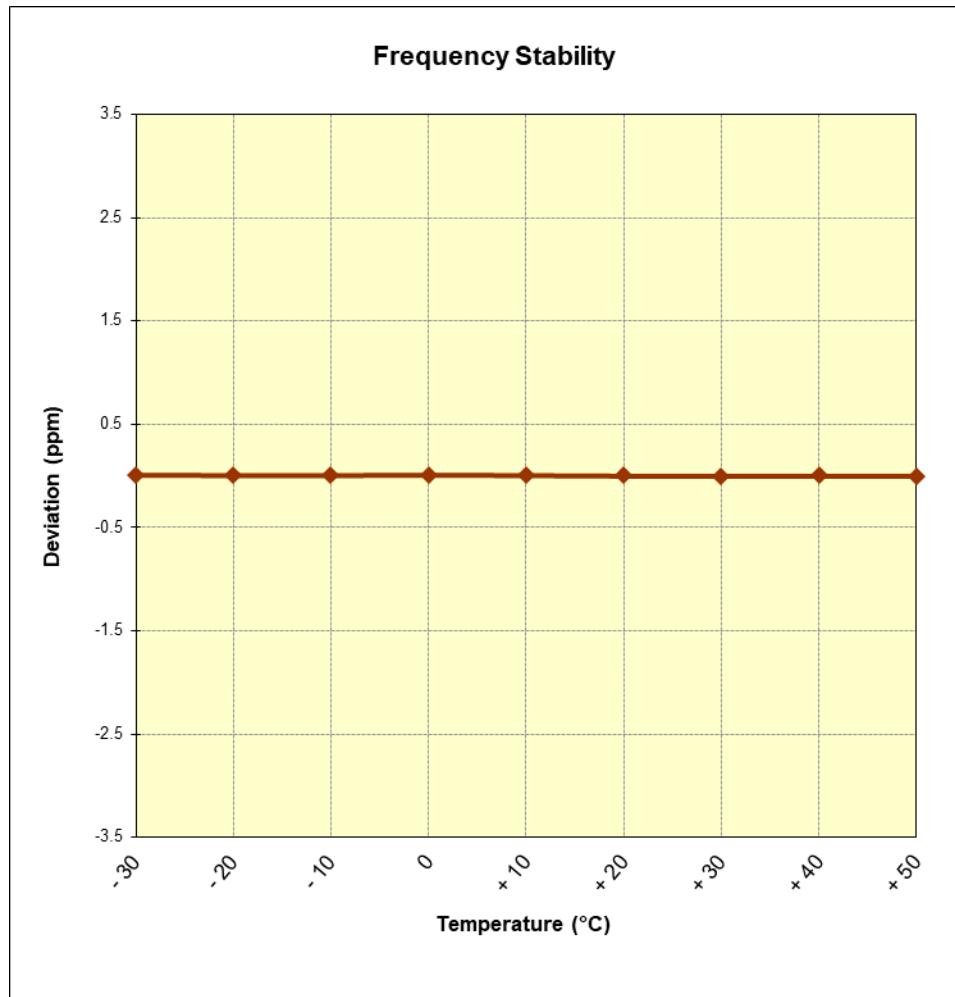


Figure 7-9. Frequency Stability Graph (Cellular GPRS Mode – Ch. 190)

FCC ID: BCGA2324	<b>PCTEST</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 102 of 111	

## Frequency Stability / Temperature Variation

OPERATING FREQUENCY:	836,600,000	Hz
CHANNEL:	4183	
REFERENCE VOLTAGE:	3.80	VDC
DEVIATION LIMIT:	± 0.00025 % or 2.5 ppm	

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	836,600,000	0	0.0000000
100 %		- 20	836,599,999	-1	-0.0000001
100 %		- 10	836,599,999	-1	-0.0000002
100 %		0	836,600,000	0	0.0000000
100 %		+ 10	836,599,999	-1	-0.0000001
100 %		+ 20	836,600,000	-1	-0.0000001
100 %		+ 30	836,600,000	0	0.0000000
100 %		+ 40	836,600,000	0	0.0000000
100 %		+ 50	836,600,000	0	0.0000000
BATT. ENDPOINT	3.40	+ 20	836,600,000	0	0.0000000

Table 7-69. Frequency Stability Data (Cellular WCDMA Mode – Ch. 4183)

FCC ID: BCGA2324	 <b>PCTEST®</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 103 of 111

## Frequency Stability / Temperature Variation

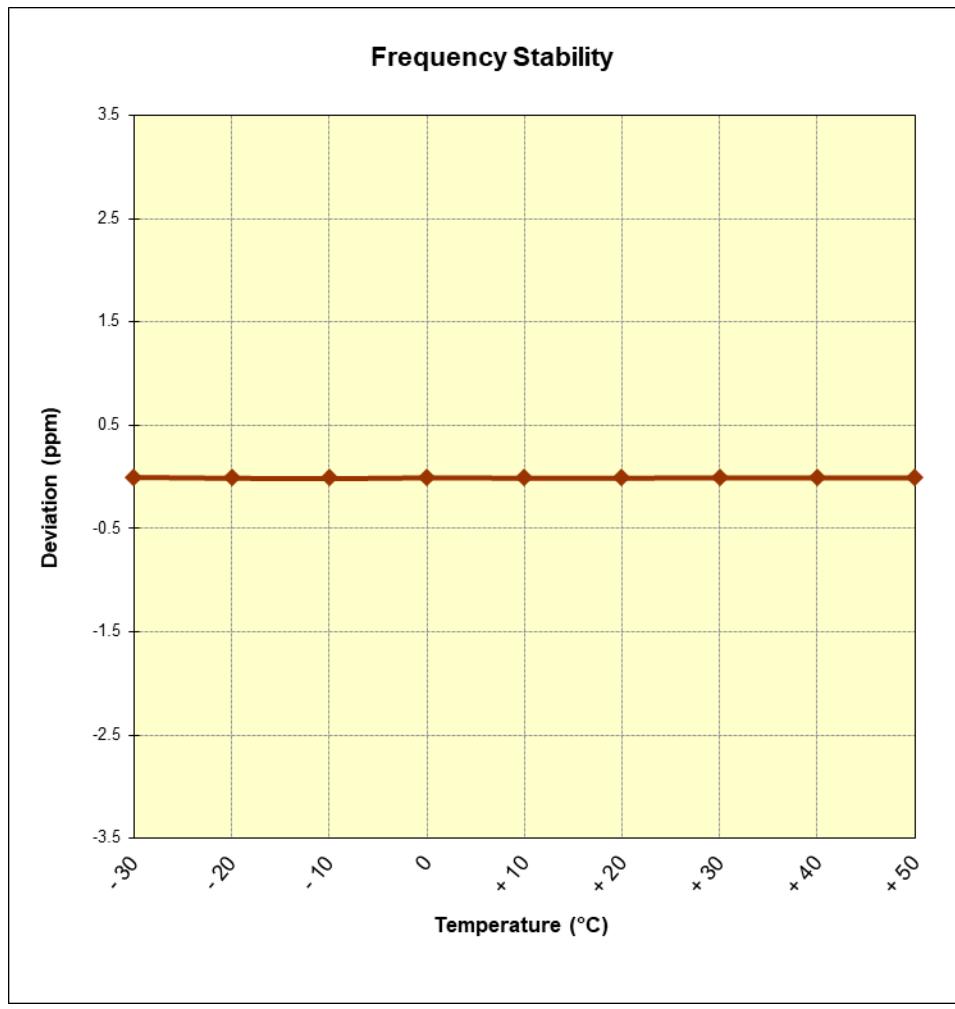


Figure 7-10. Frequency Stability Graph (Cellular WCDMA Mode – Ch. 4183)

FCC ID: BCGA2324	<b>PCTEST</b> Proud to be part of  element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 104 of 111	

## Frequency Stability / Temperature Variation

OPERATING FREQUENCY:	1,732,600,000	Hz
CHANNEL:	1413	
REFERENCE VOLTAGE:	3.80	VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	1,732,600,001	1	0.0000000
100 %		- 20	1,732,599,999	-1	0.0000000
100 %		- 10	1,732,600,002	2	0.0000001
100 %		0	1,732,600,000	0	0.0000000
100 %		+ 10	1,732,599,999	-1	0.0000000
100 %		+ 20	1,732,599,999	-1	0.0000000
100 %		+ 30	1,732,600,000	0	0.0000000
100 %		+ 40	1,732,599,999	-1	0.0000000
100 %		+ 50	1,732,600,000	0	0.0000000
BATT. ENDPOINT	3.40	+ 20	1,732,600,000	0	0.0000000

**Table 7-70. Frequency Stability Data (AWS WCDMA Mode – Ch. 1413)**

**Note:**

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: BCGA2324	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 105 of 111

## Frequency Stability / Temperature Variation

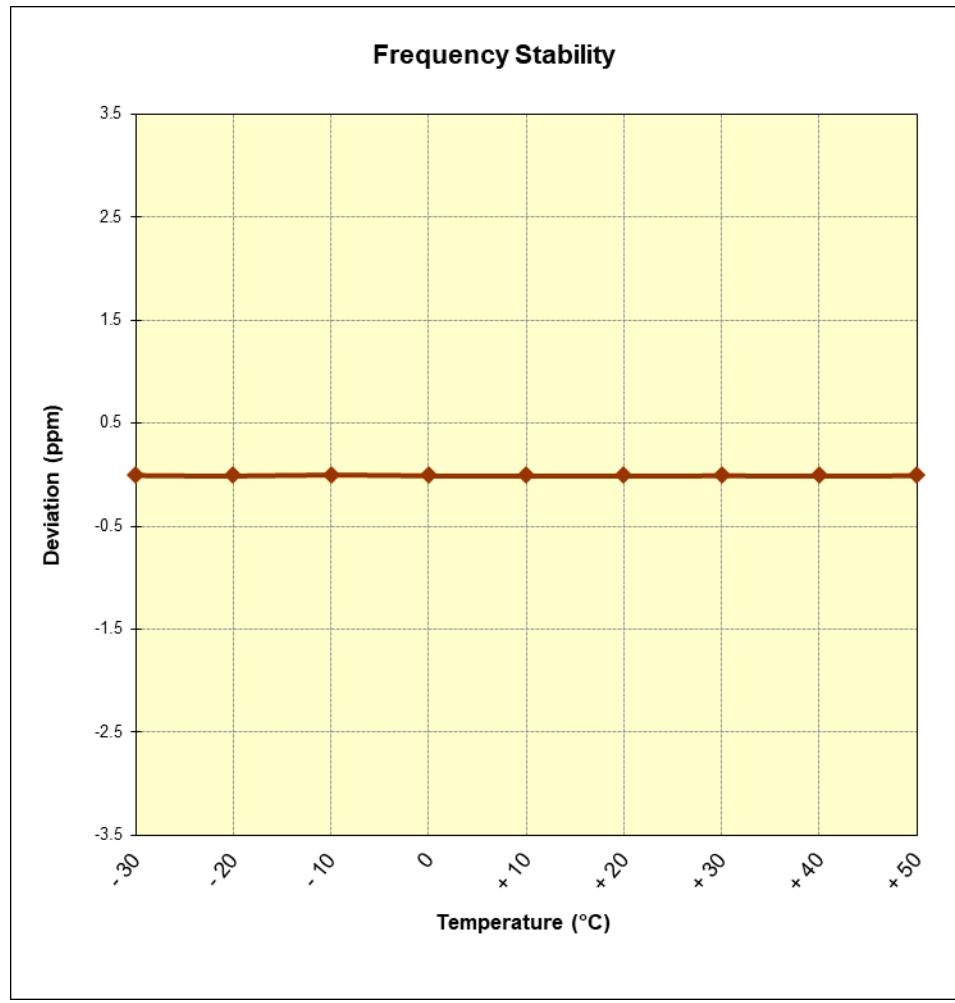


Figure 7-11. Frequency Stability Graph (AWS WCDMA Mode – Ch. 1413)

FCC ID: BCGA2324	<b>PCTEST</b> Proud to be part of  element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 106 of 111	

## Frequency Stability / Temperature Variation

OPERATING FREQUENCY:	1,880,000,000	Hz
CHANNEL:	661	
REFERENCE VOLTAGE:	3.80	VDC
DEVIATION LIMIT:	± 0.00025 % or 2.5 ppm	

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	1,880,000,001	1	0.0000001
100 %		- 20	1,879,999,998	-2	-0.0000001
100 %		- 10	1,879,999,998	-2	-0.0000001
100 %		0	1,879,999,999	-1	0.0000000
100 %		+ 10	1,880,000,004	4	0.0000002
100 %		+ 20	1,879,999,995	-5	-0.0000002
100 %		+ 30	1,880,000,007	7	0.0000004
100 %		+ 40	1,880,000,006	6	0.0000003
100 %		+ 50	1,880,000,007	7	0.0000004
BATT. ENDPOINT	3.40	+ 20	1,880,000,007	7	0.0000004

Table 7-71. Frequency Stability Data (PCS GPRS Mode – Ch. 661)

FCC ID: BCGA2324	 <b>PCTEST®</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 107 of 111

## Frequency Stability / Temperature Variation

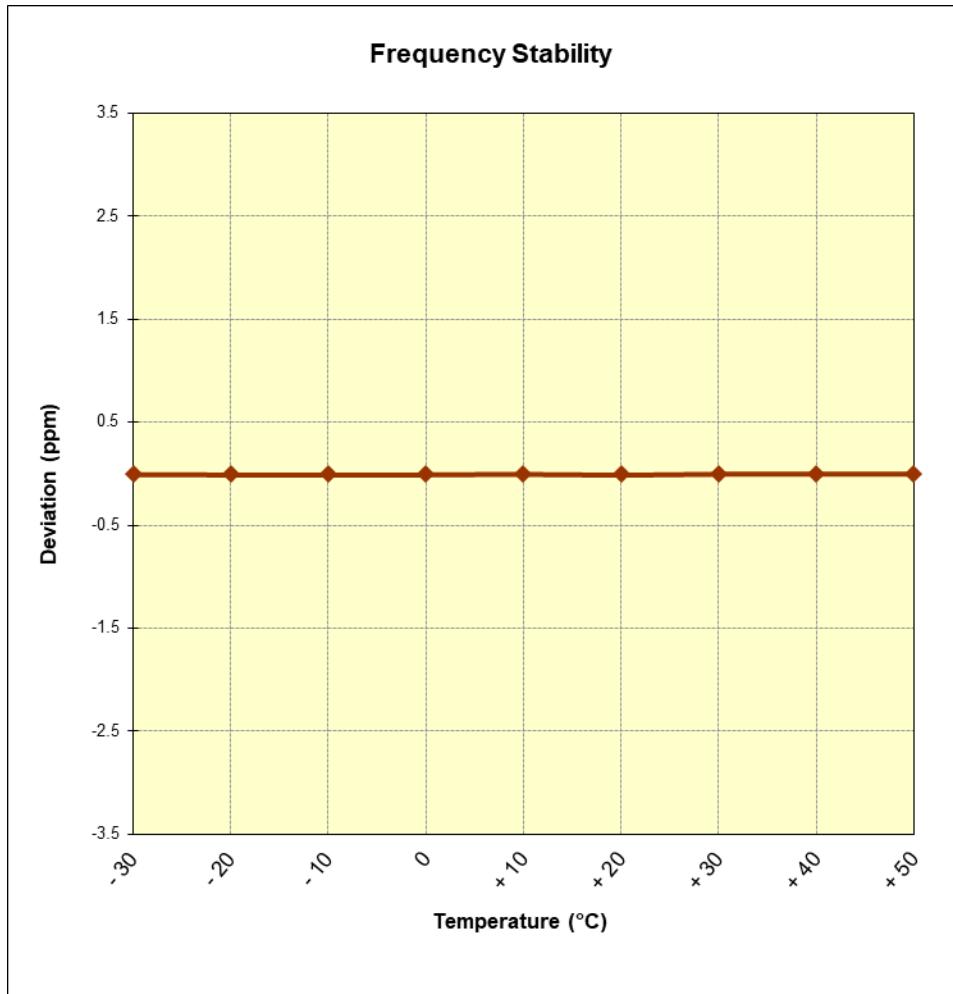


Figure 7-12. Frequency Stability Graph (PCS GPRS Mode – Ch. 661)

FCC ID: BCGA2324	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 108 of 111	

## Frequency Stability / Temperature Variation

OPERATING FREQUENCY:	1,880,000,000	Hz
CHANNEL:	9400	
REFERENCE VOLTAGE:	3.80	VDC
DEVIATION LIMIT:	± 0.00025 % or 2.5 ppm	

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	1,879,999,998	-2	-0.0000001
100 %		- 20	1,879,999,998	-2	-0.0000001
100 %		- 10	1,879,999,999	-1	-0.0000001
100 %		0	1,880,000,001	1	0.0000000
100 %		+ 10	1,880,000,001	1	0.0000000
100 %		+ 20	1,880,000,000	0	0.0000000
100 %		+ 30	1,880,000,000	0	0.0000000
100 %		+ 40	1,880,000,000	0	0.0000000
100 %		+ 50	1,880,000,000	0	0.0000000
BATT. ENDPOINT	3.40	+ 20	1,880,000,000	0	0.0000000

**Table 7-72. Frequency Stability Data (PCS WCDMA Mode – Ch. 9400)**

FCC ID: BCGA2324	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 109 of 111

## Frequency Stability / Temperature Variation

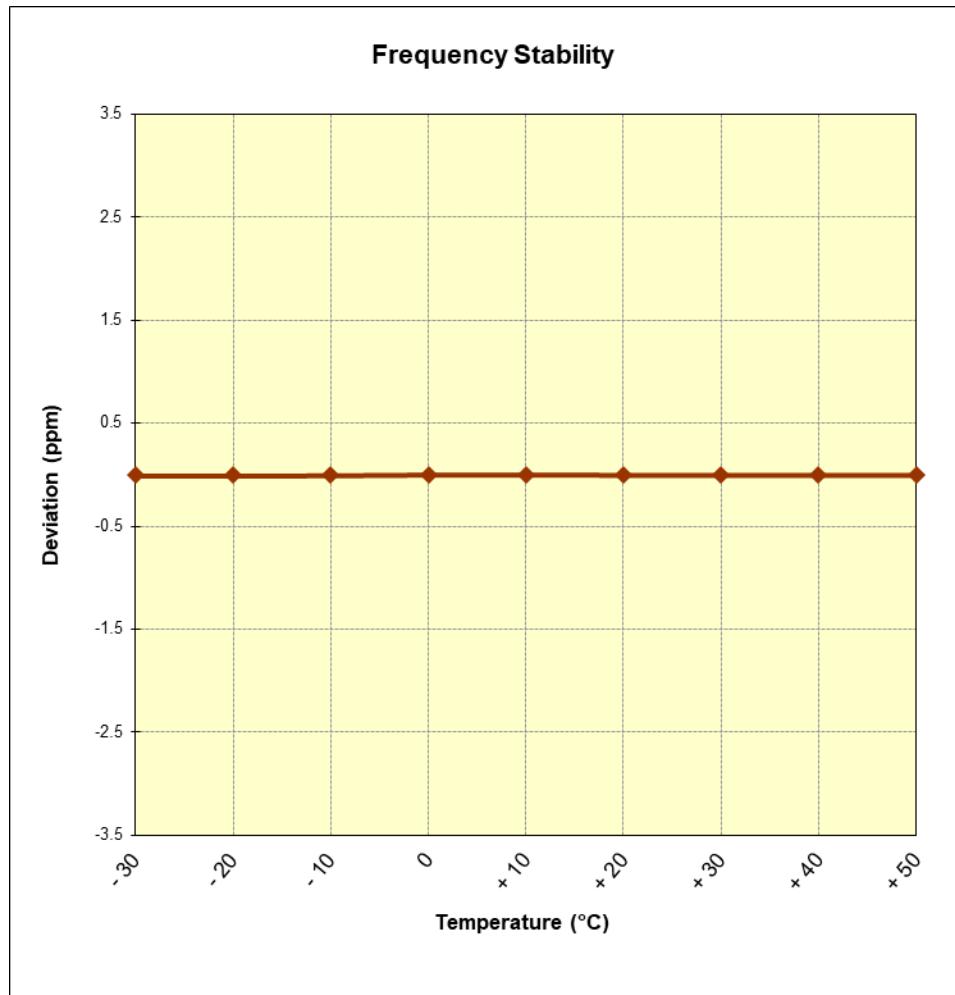


Figure 7-13. Frequency Stability Graph (PCS WCDMA Mode – Ch. 9400)

FCC ID: BCGA2324	<b>PCTEST</b> Proud to be part of  element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device	Page 110 of 111	

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA2324** complies with all the requirements of Part 22, 24, & 27 of the FCC Rules and RSS-132, RSS-133, RSS-139 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA2324	 <b>PCTEST</b> <sup>®</sup> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2004270029-02-R1.BCG	Test Dates: 07/16/2020 - 09/09/2020	EUT Type: Tablet Device		Page 111 of 111