



Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 8
 Distance of Measurements: 3 Meters
 Operating Frequency: 2427MHz
 Channel: 4

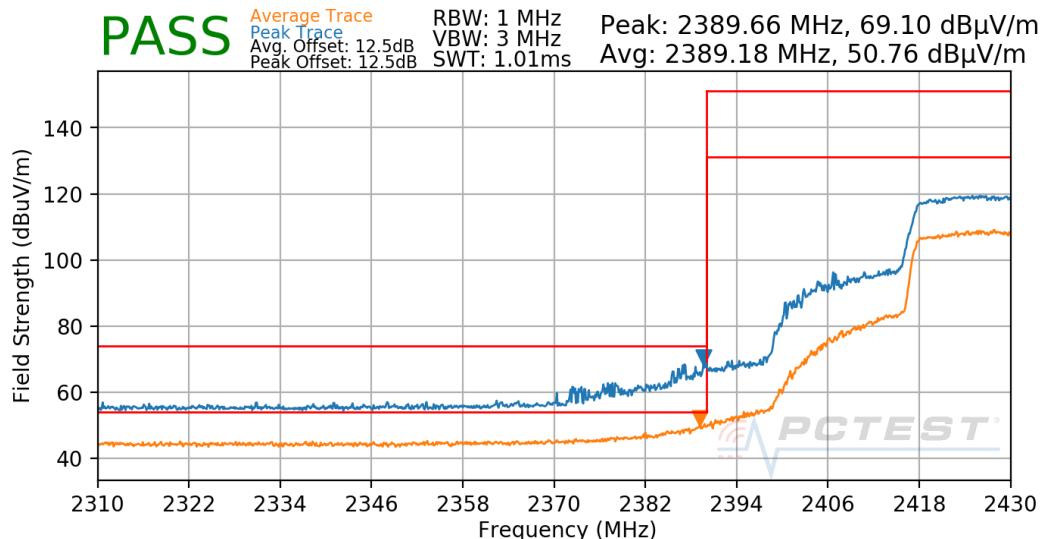

Plot 7-162. Radiated Restricted Lower Band Edge Measurement Antenna WF8 (Peak & Average – RU242)


Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 8
 Distance of Measurements: 3 Meters
 Operating Frequency: 2447MHz
 Channel: 8

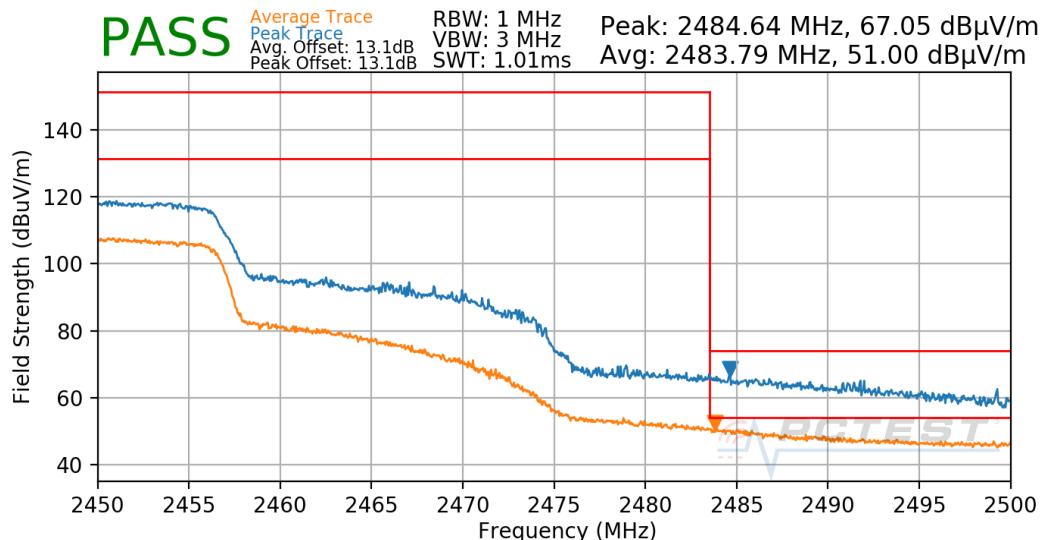

Plot 7-163. Radiated Restricted Upper Band Edge Measurement Antenna WF8 (Peak & Average – RU242)


FCC ID: BCGA2377 IC: 579C-A2377	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device	Page 128 of 160

Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2452MHz
 Channel: 9

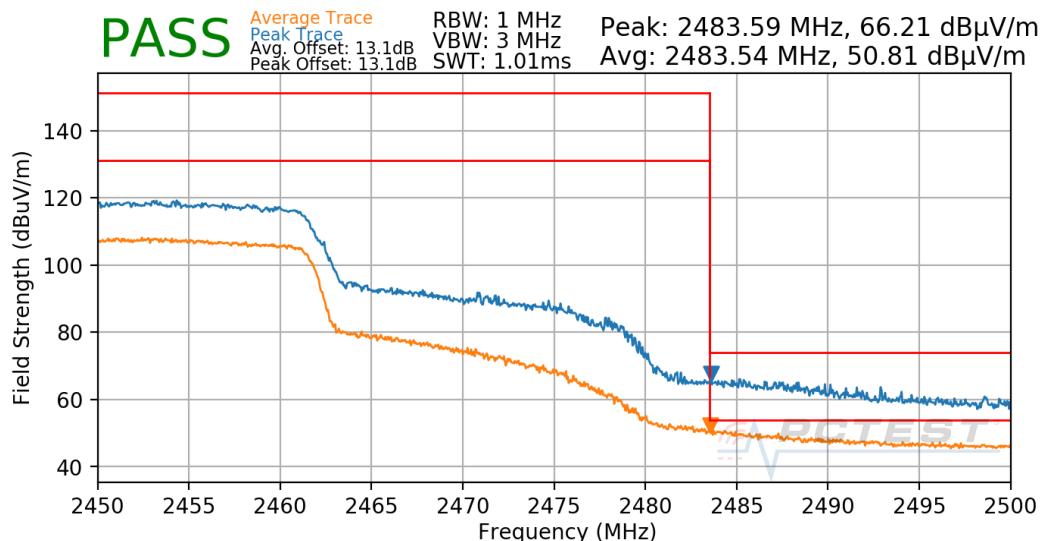

Plot 7-164. Radiated Restricted Upper Band Edge Measurement Antenna WF8 (Peak & Average – RU242)


Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2457MHz
 Channel: 10

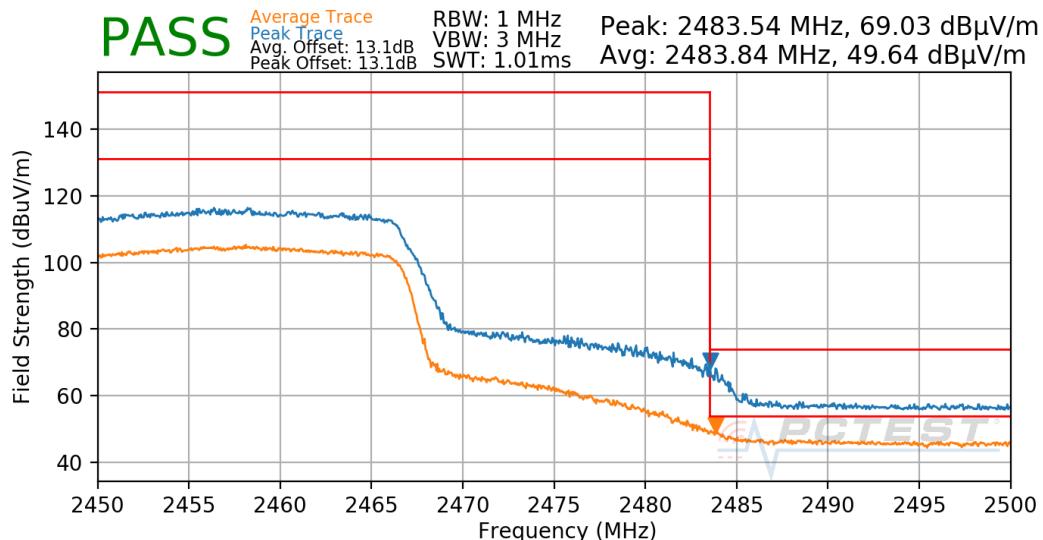

Plot 7-165. Radiated Restricted Upper Band Edge Measurement Antenna WF8 (Peak & Average – RU242)


FCC ID: BCGA2377 IC: 579C-A2377	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device	Page 129 of 160

Mode: 802.11ax OFDMA
Data Rate: MCS5
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

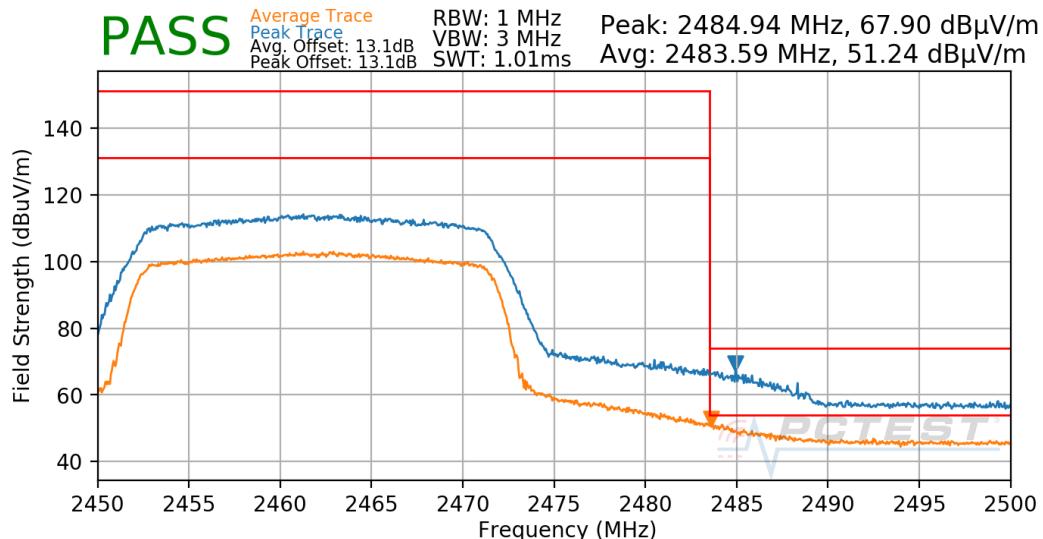

Plot 7-166. Radiated Restricted Upper Band Edge Measurement Antenna WF8 (Peak & Average – RU242)

Mode: 802.11ax OFDMA
Data Rate: MCS5
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2467MHz
Channel: 12

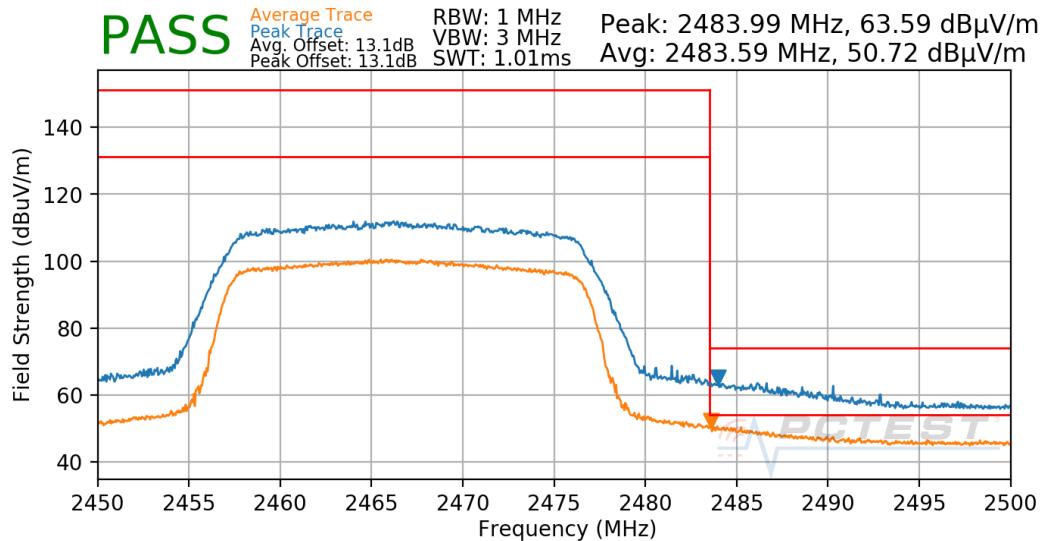

Plot 7-167. Radiated Restricted Upper Band Edge Measurement Antenna WF8 (Peak & Average – RU242)


FCC ID: BCGA2377 IC: 579C-A2377	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device	Page 130 of 160	

7.7.5 Antenna WF7 Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.


Mode:	802.11ax OFDMA
Data Rate:	MCS5
RU Index:	0
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

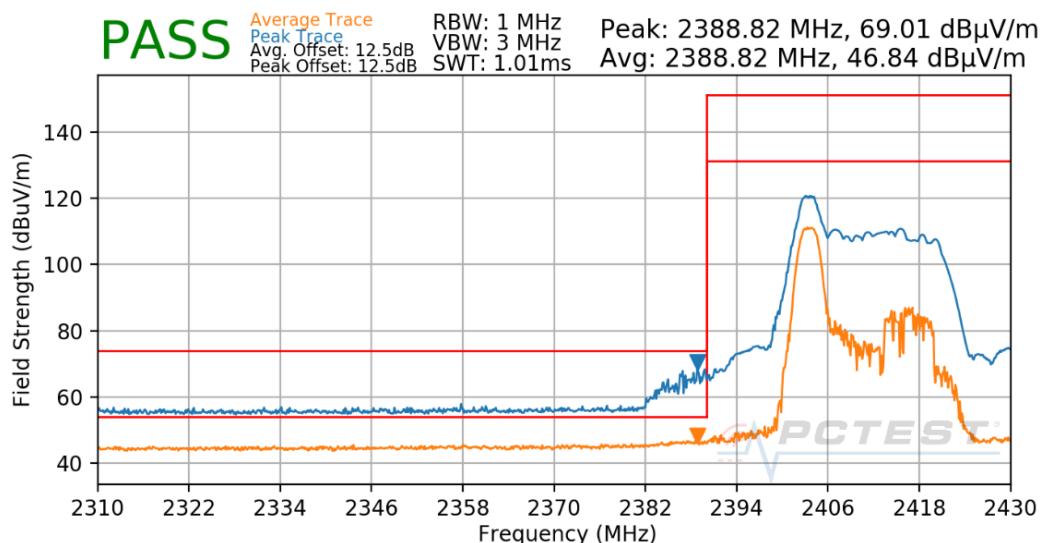

Plot 7-168. Radiated Restricted Lower Band Edge Measurement Antenna WF7 (Peak & Average – RU26)


FCC ID: BCGA2377 IC: 579C-A2377	PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device	Page 131 of 160	

Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2417MHz
 Channel: 2

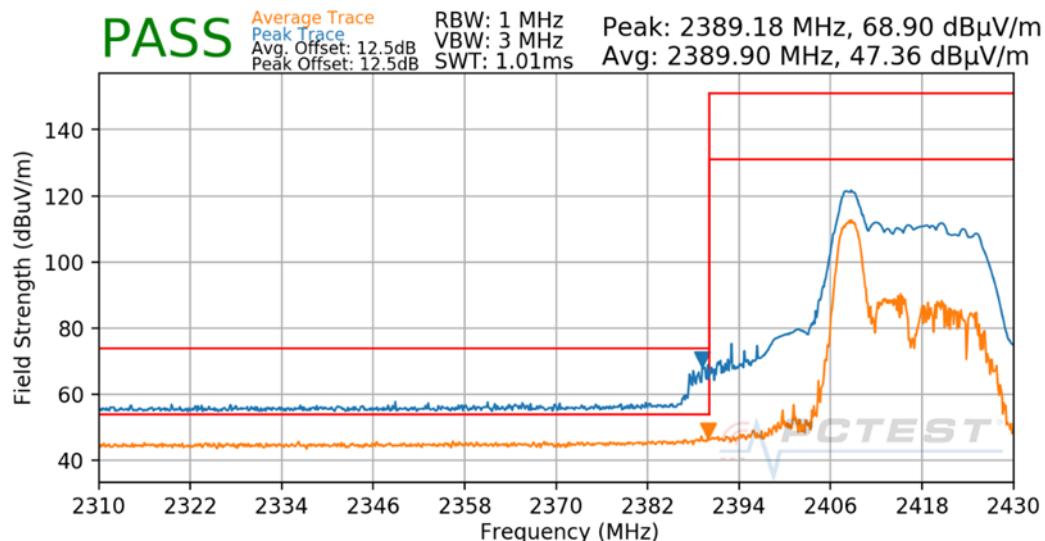

Plot 7-169. Radiated Restricted Lower Band Edge Measurement Antenna WF7 (Peak & Average – RU26)


Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2422MHz
 Channel: 3

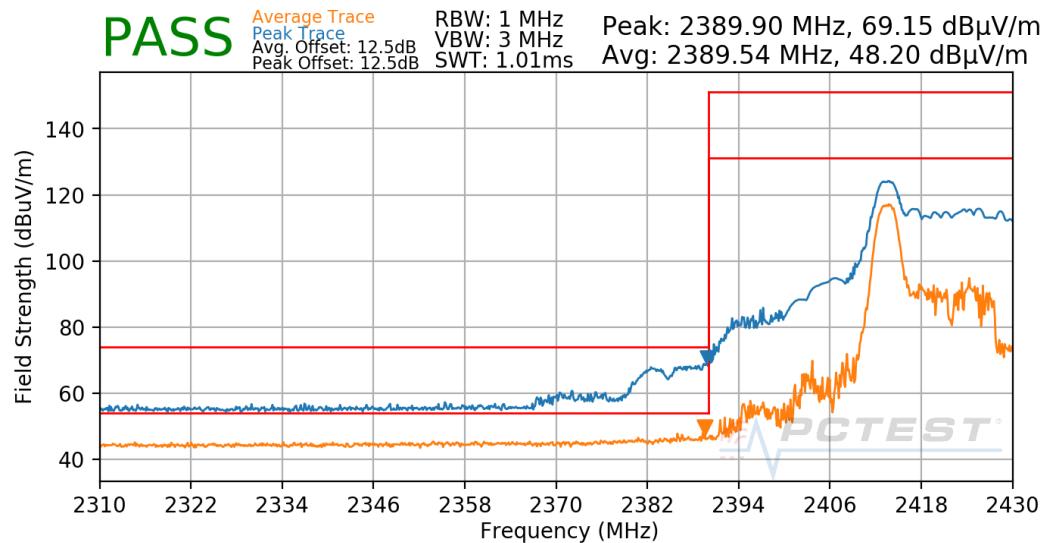

Plot 7-170. Radiated Restricted Lower Band Edge Measurement Antenna WF7 (Peak & Average – RU26)


FCC ID: BCGA2377 IC: 579C-A2377	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device	Page 132 of 160

Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 8
 Distance of Measurements: 3 Meters
 Operating Frequency: 2427MHz
 Channel: 4

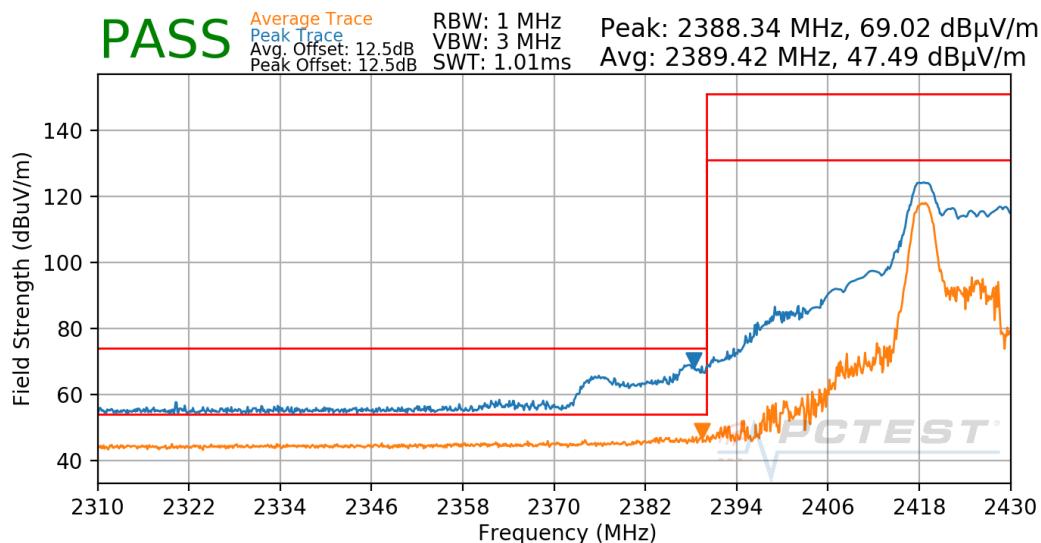

Plot 7-171. Radiated Restricted Lower Band Edge Measurement Antenna WF7 (Peak & Average – RU26)


Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 8
 Distance of Measurements: 3 Meters
 Operating Frequency: 2452MHz
 Channel: 9

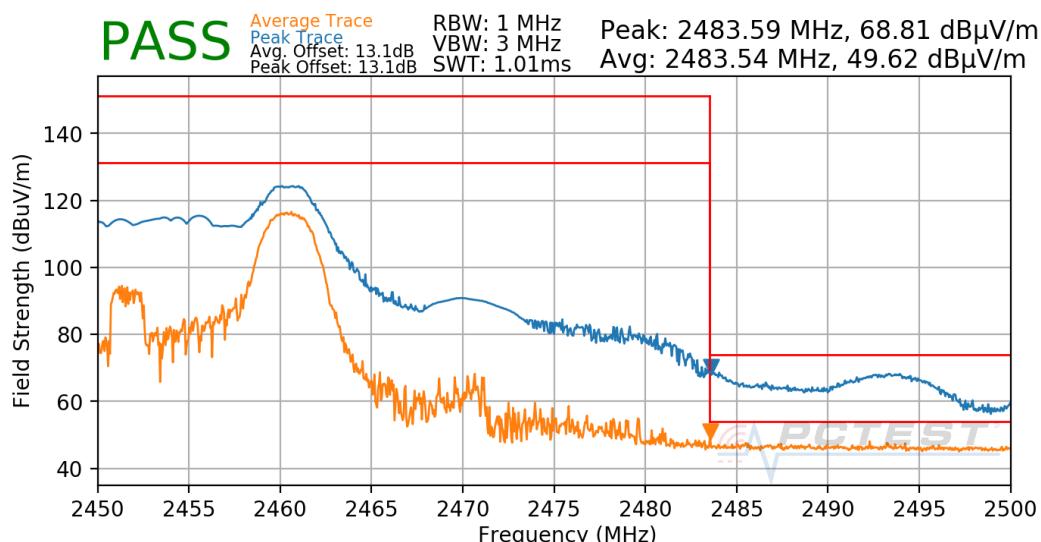

Plot 7-172. Radiated Restricted Upper Band Edge Measurement Antenna WF7 (Peak & Average – RU26)


FCC ID: BCGA2377 IC: 579C-A2377	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device		Page 133 of 160

Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 8
 Distance of Measurements: 3 Meters
 Operating Frequency: 2457MHz
 Channel: 10

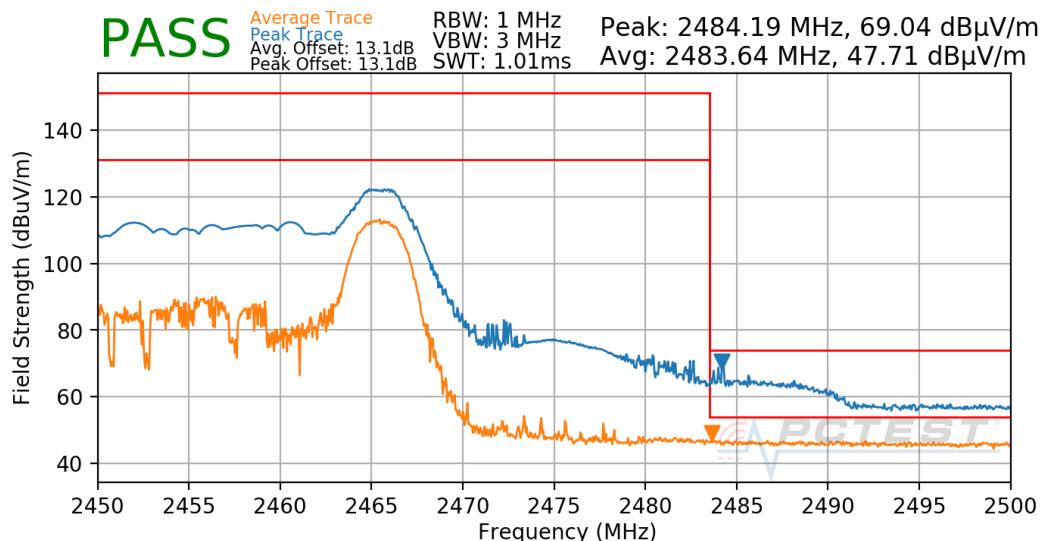

Plot 7-173. Radiated Restricted Upper Band Edge Measurement Antenna WF7 (Peak & Average – RU26)


Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 8
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

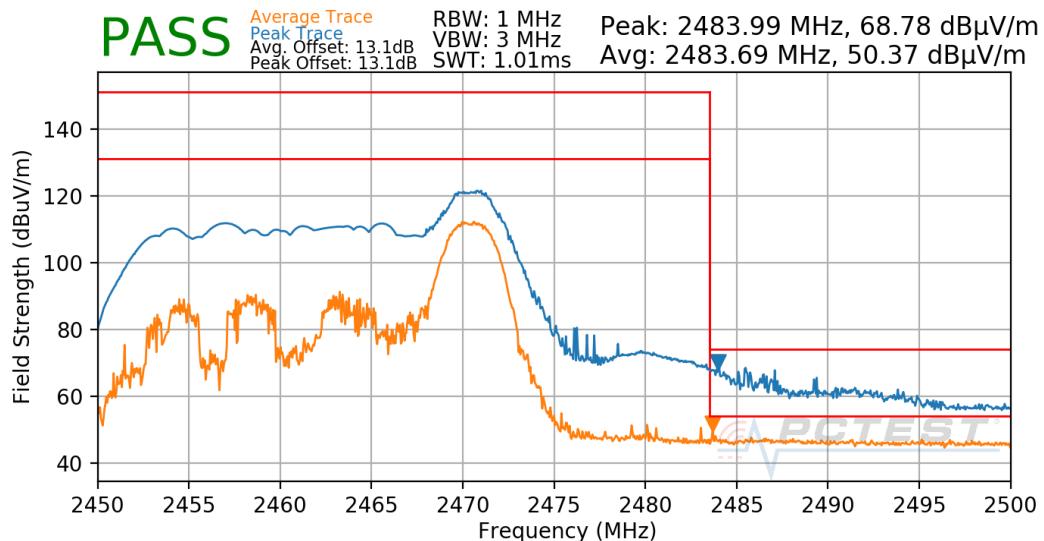

Plot 7-174. Radiated Restricted Upper Band Edge Measurement Antenna WF7 (Peak & Average – RU26)


FCC ID: BCGA2377 IC: 579C-A2377	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device	Page 134 of 160

Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 8
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

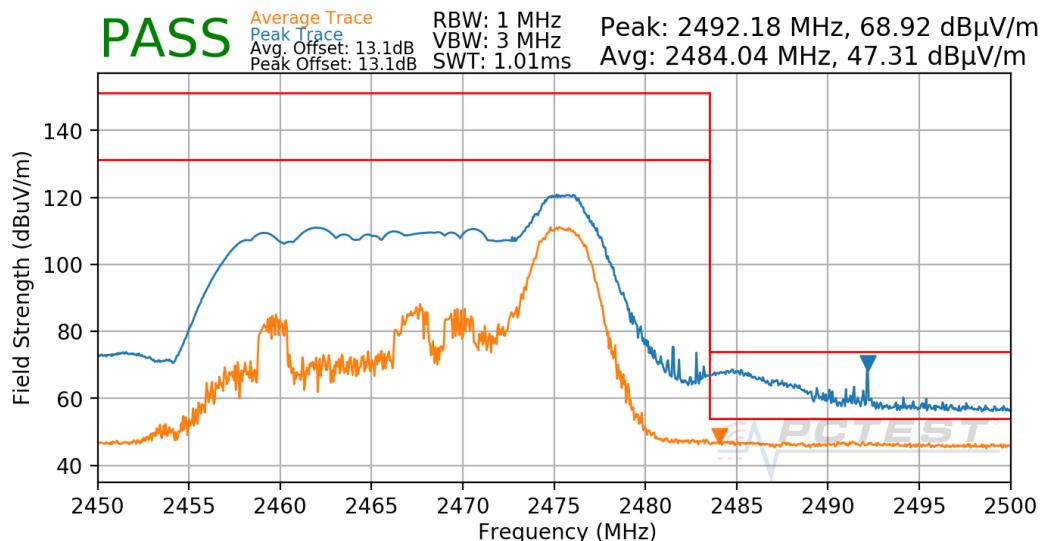

Plot 7-175. Radiated Restricted Upper Band Edge Measurement Antenna WF7 (Peak & Average – RU26)


Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

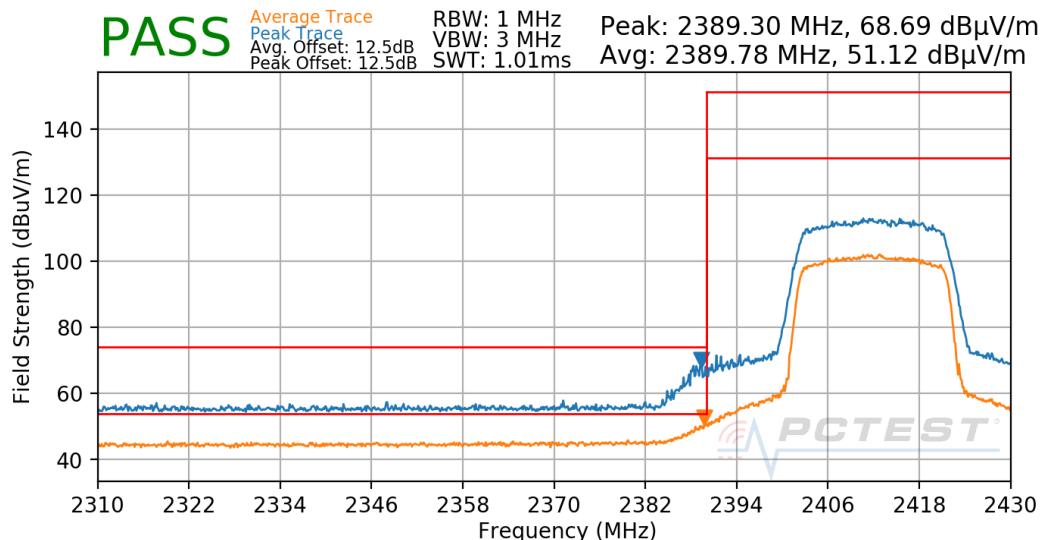

Plot 7-176. Radiated Restricted Lower Band Edge Measurement Antenna WF7 (Peak & Average – RU242)


FCC ID: BCGA2377 IC: 579C-A2377	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device	Page 135 of 160

Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2417MHz
 Channel: 2

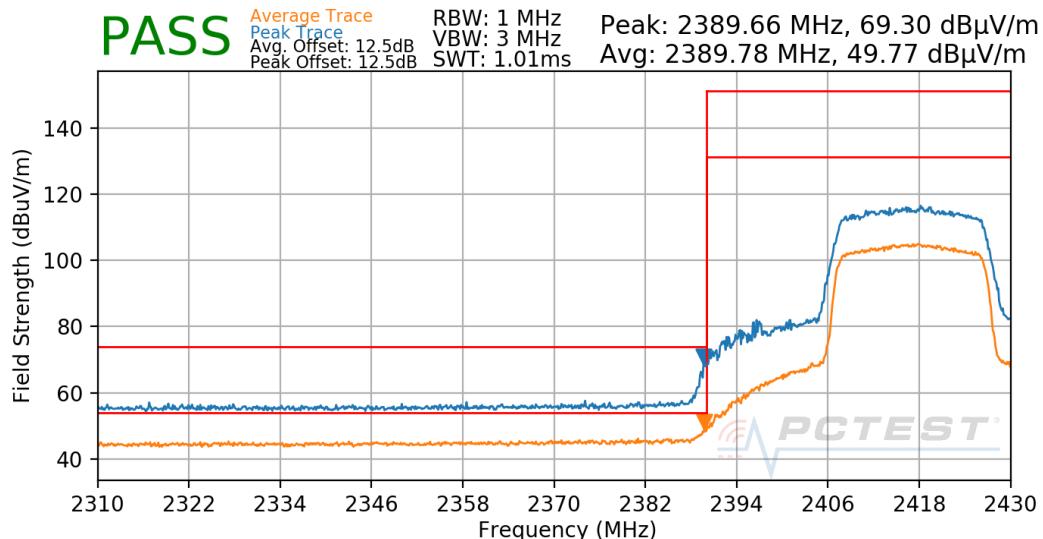

Plot 7-177. Radiated Restricted Lower Band Edge Measurement Antenna WF7 (Peak & Average – RU242)


Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2422MHz
 Channel: 3

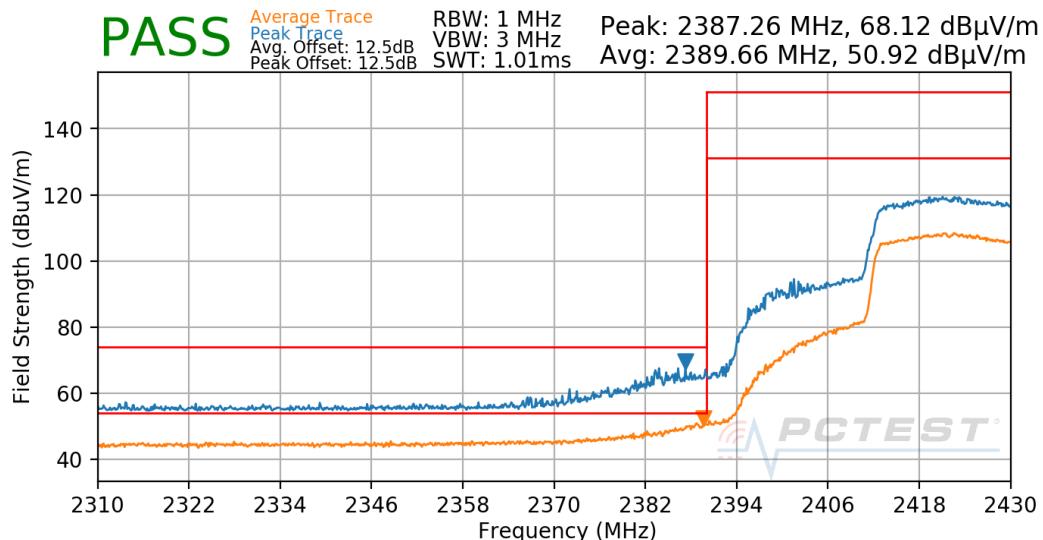

Plot 7-178. Radiated Restricted Lower Band Edge Measurement Antenna WF7 (Peak & Average – RU242)


FCC ID: BCGA2377 IC: 579C-A2377	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device	Page 136 of 160

Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 8
 Distance of Measurements: 3 Meters
 Operating Frequency: 2427MHz
 Channel: 4

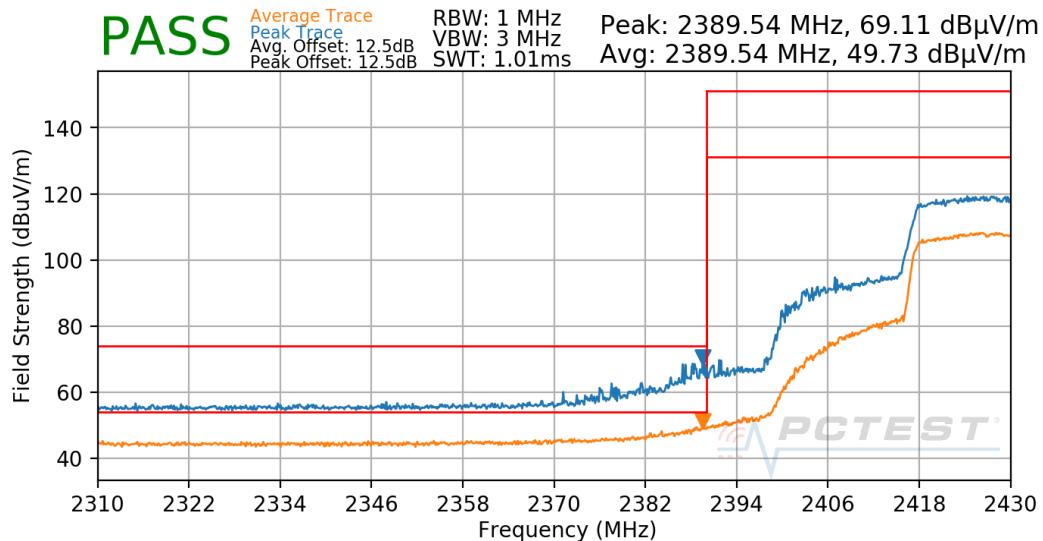

Plot 7-179. Radiated Restricted Lower Band Edge Measurement Antenna WF7 (Peak & Average – RU242)


Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 8
 Distance of Measurements: 3 Meters
 Operating Frequency: 2447MHz
 Channel: 8

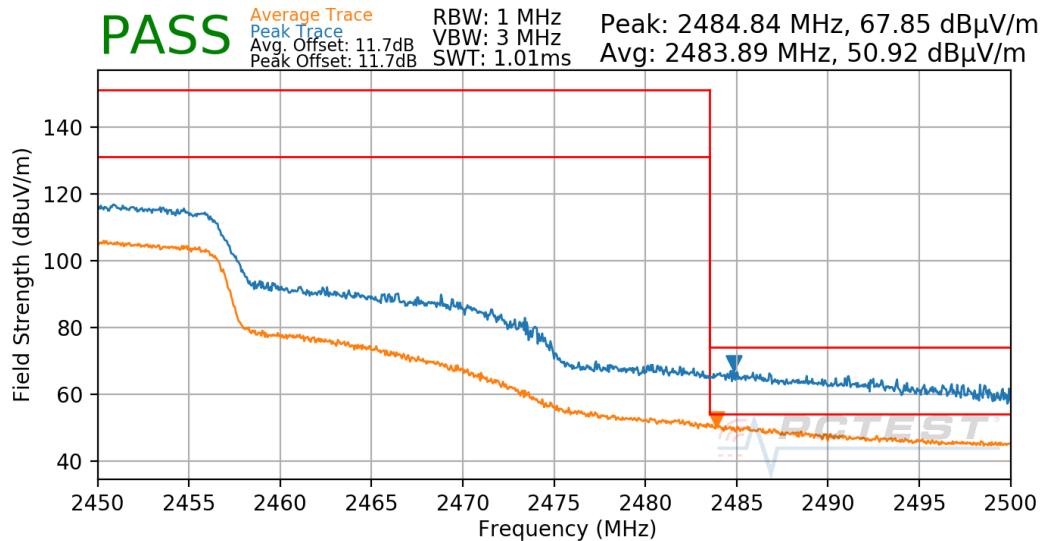

Plot 7-180. Radiated Restricted Upper Band Edge Measurement Antenna WF7 (Peak & Average – RU242)


FCC ID: BCGA2377 IC: 579C-A2377	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device	Page 137 of 160

Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2452MHz
 Channel: 9

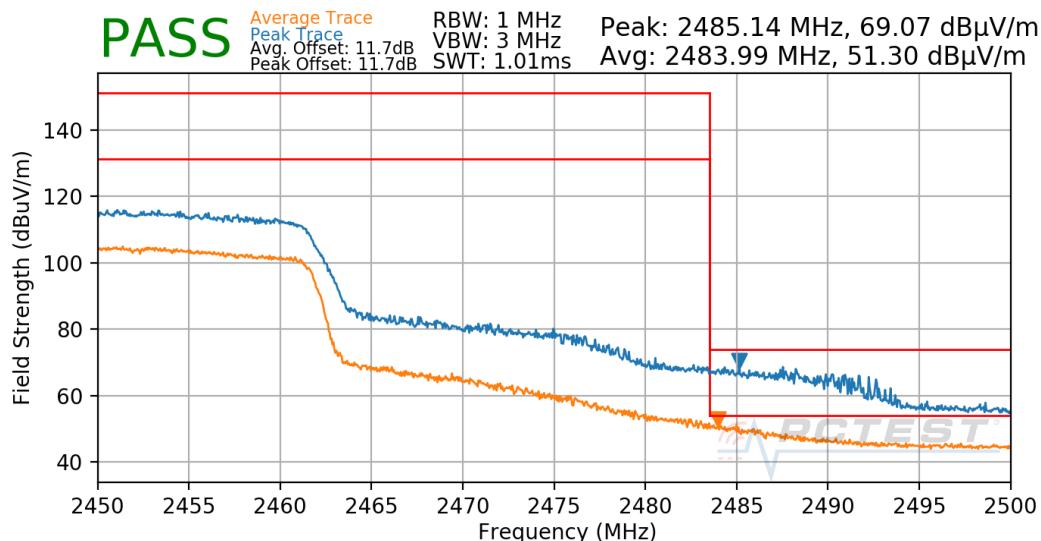

Plot 7-181. Radiated Restricted Upper Band Edge Measurement Antenna WF7 (Peak & Average – RU242)


Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2457MHz
 Channel: 10

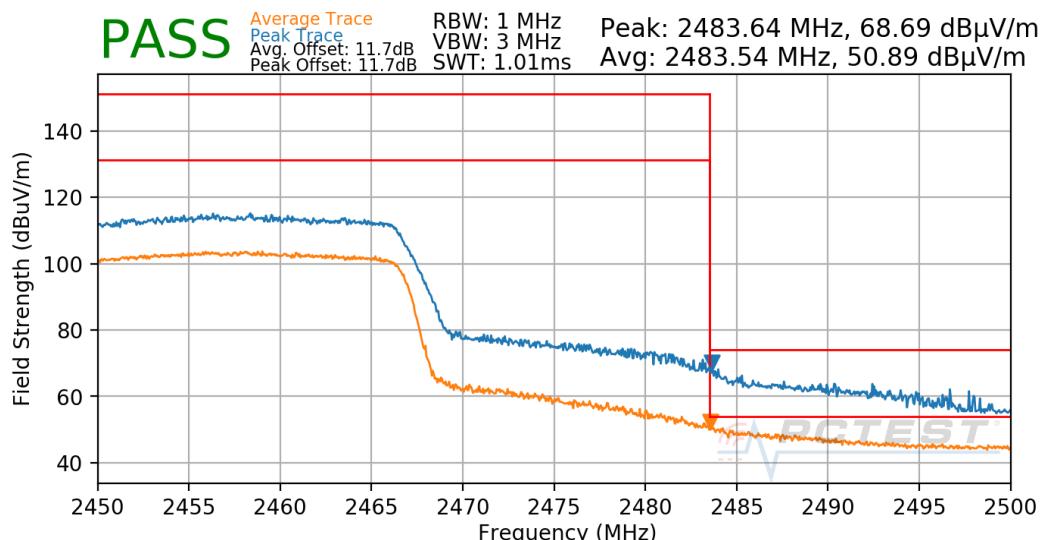

Plot 7-182. Radiated Restricted Upper Band Edge Measurement Antenna WF7 (Peak & Average – RU242)


FCC ID: BCGA2377 IC: 579C-A2377	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device	Page 138 of 160

Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

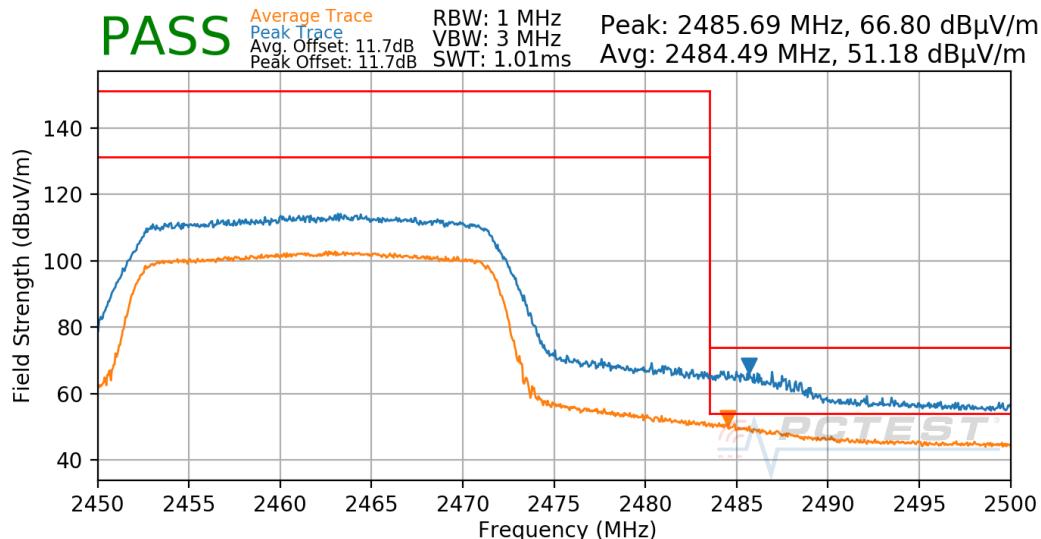

Plot 7-183. Radiated Restricted Upper Band Edge Measurement Antenna WF7 (Peak & Average – RU242)

Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

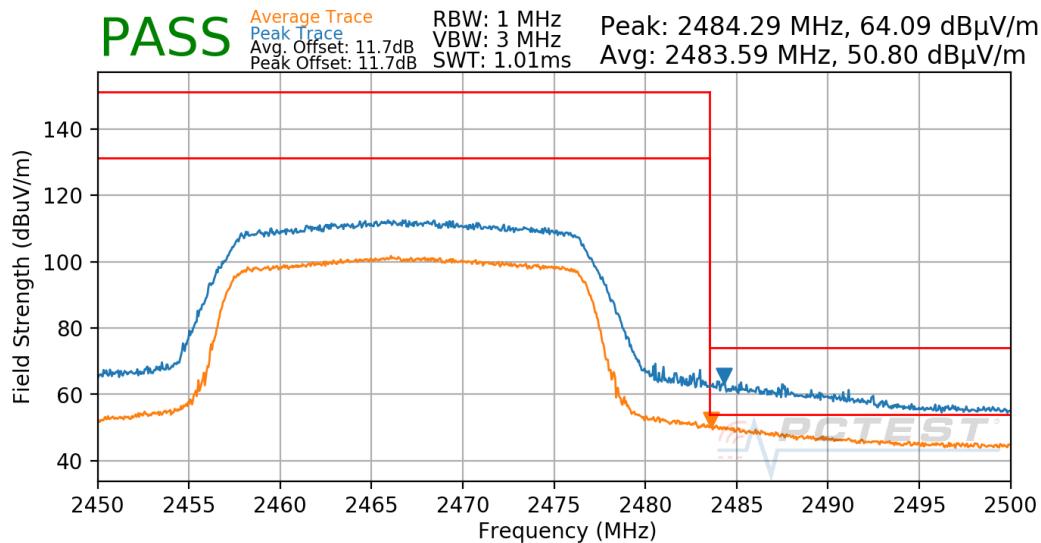

Plot 7-184. Radiated Restricted Upper Band Edge Measurement Antenna WF7 (Peak & Average – RU242)


FCC ID: BCGA2377 IC: 579C-A2377	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device	Page 139 of 160

7.7.6 CDD Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.


Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

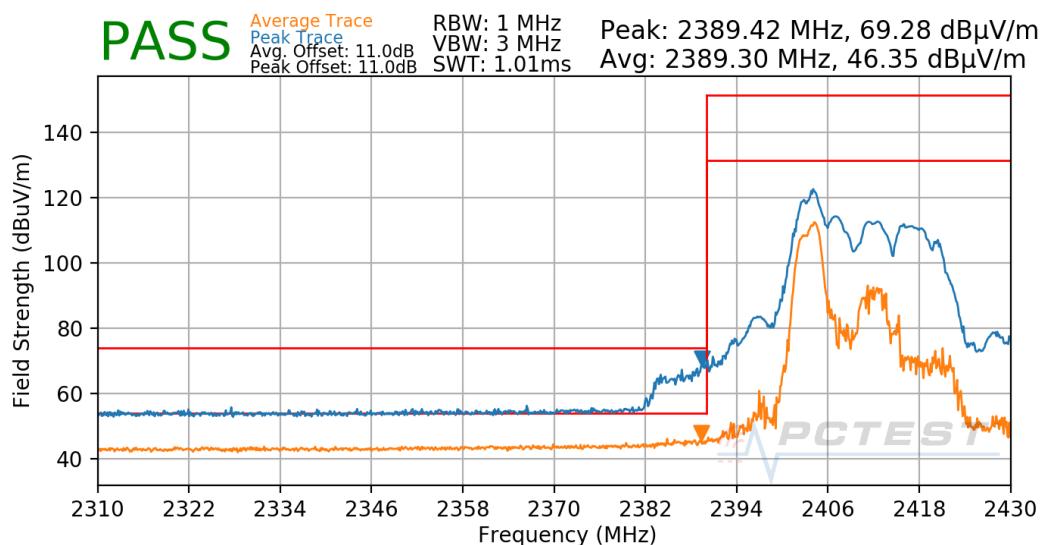

Plot 7-185. Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU26)


FCC ID: BCGA2377 IC: 579C-A2377	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device		Page 140 of 160

Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2417MHz
 Channel: 2

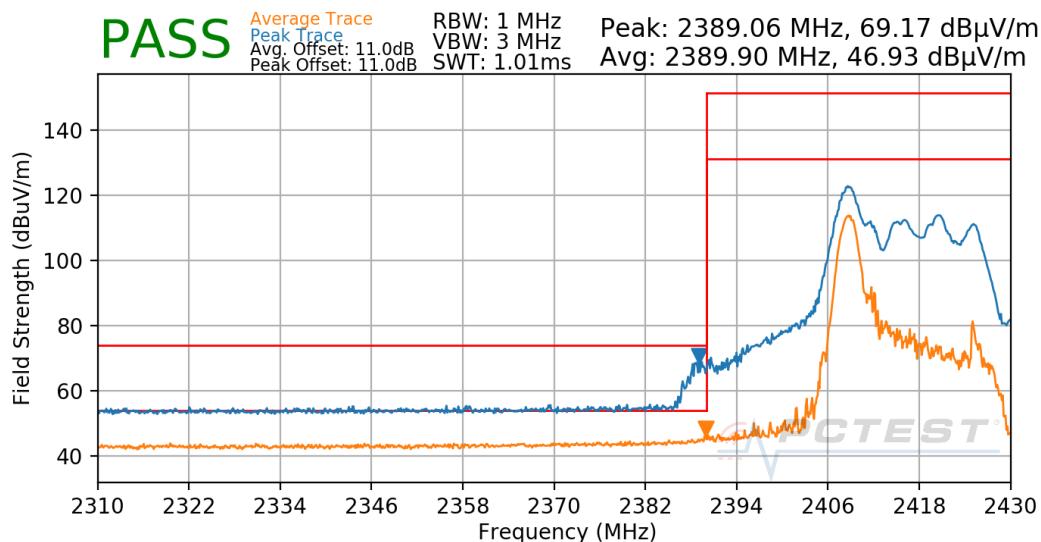

Plot 7-186. Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU26)


Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2422MHz
 Channel: 3

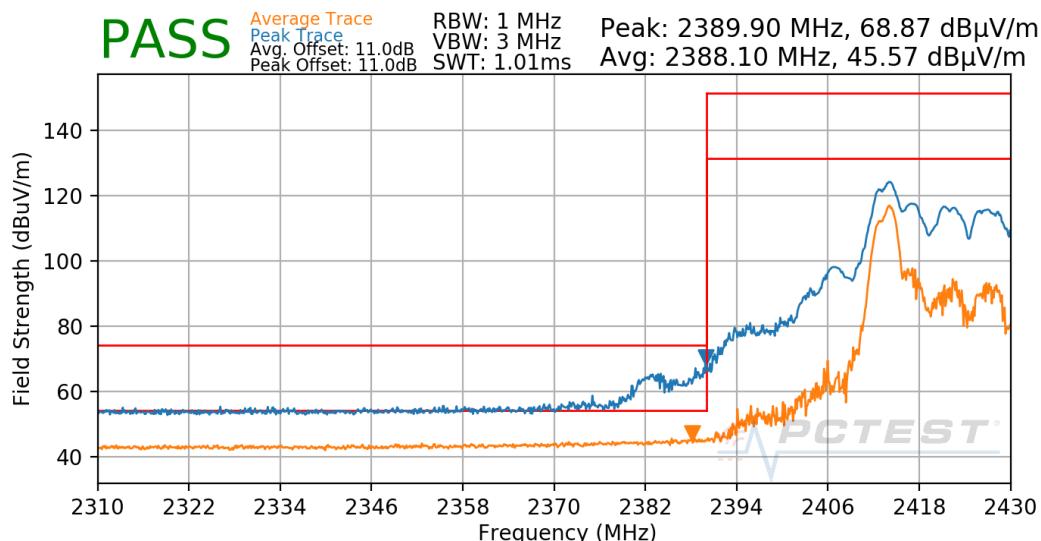

Plot 7-187. Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU26)


FCC ID: BCGA2377 IC: 579C-A2377	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device	Page 141 of 160

Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2427MHz
 Channel: 4

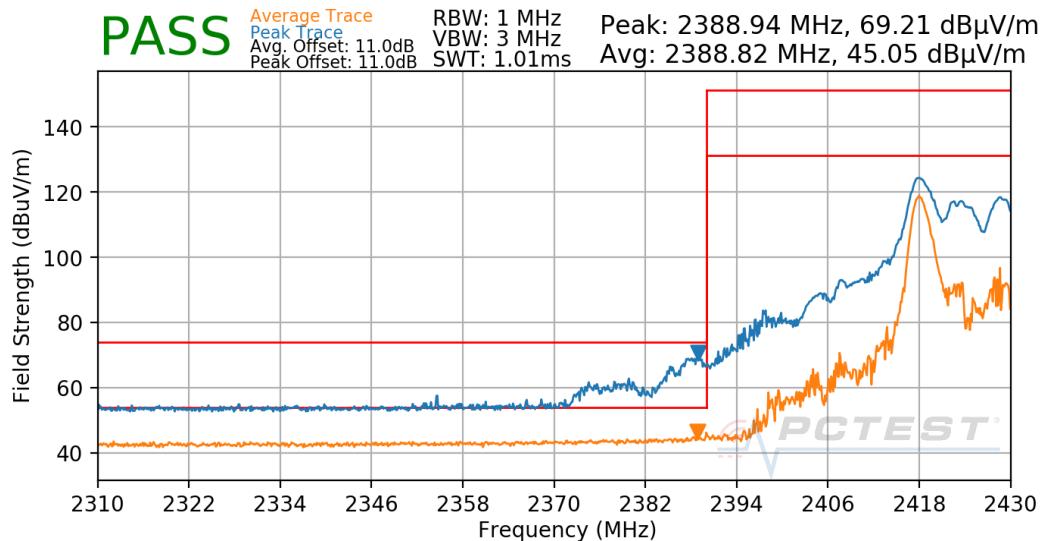

Plot 7-188. Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU26)


Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 8
 Distance of Measurements: 3 Meters
 Operating Frequency: 2447MHz
 Channel: 8

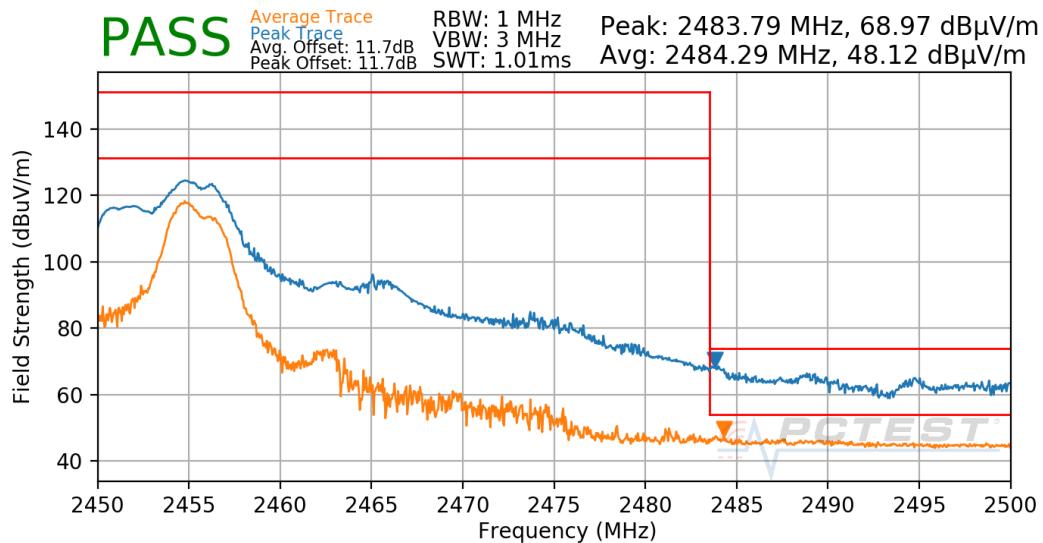

Plot 7-189. Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU26)


FCC ID: BCGA2377 IC: 579C-A2377	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device	Page 142 of 160

Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 8
 Distance of Measurements: 3 Meters
 Operating Frequency: 2452MHz
 Channel: 9

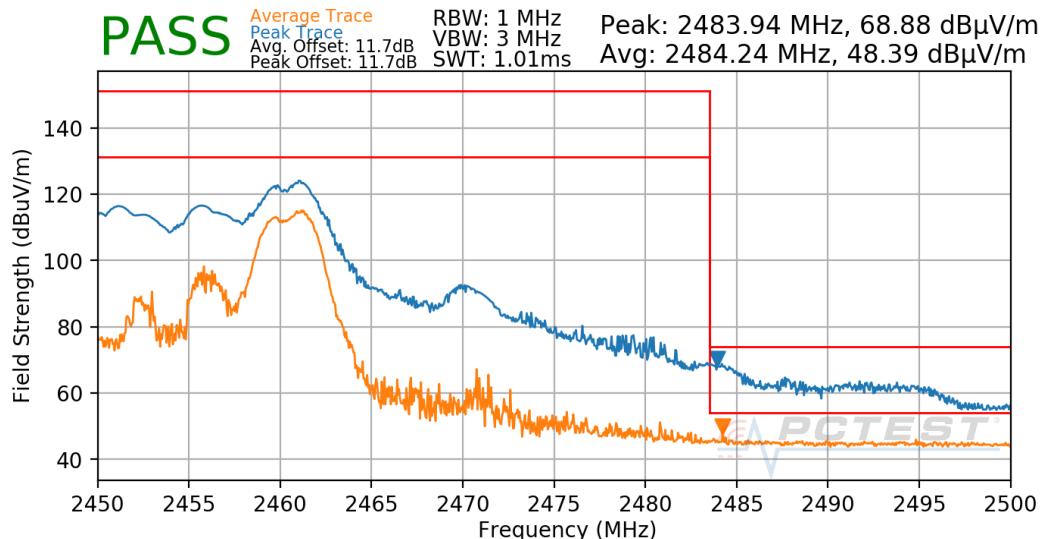

Plot 7-190. Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU26)


Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 8
 Distance of Measurements: 3 Meters
 Operating Frequency: 2457MHz
 Channel: 10

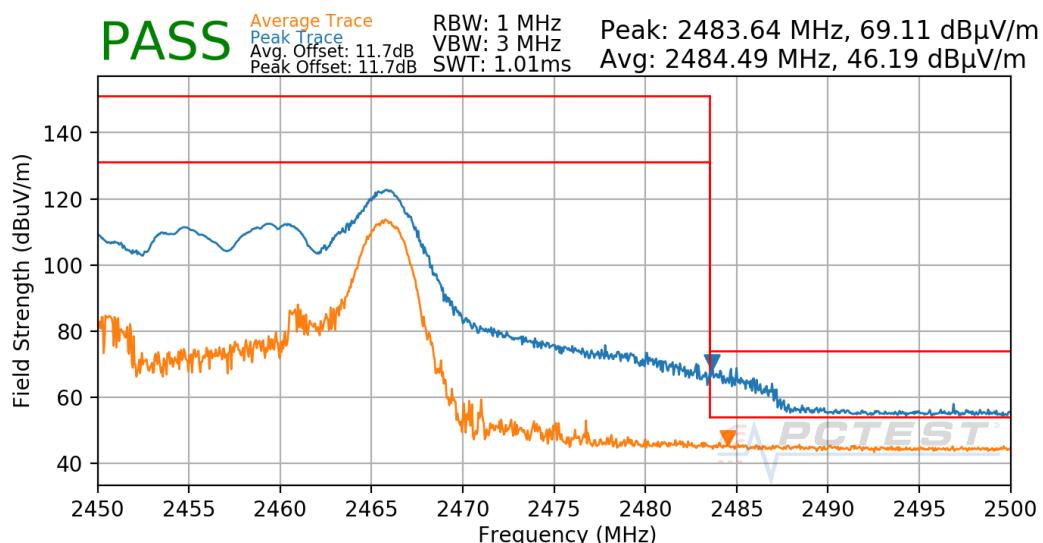

Plot 7-191. Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU26)


FCC ID: BCGA2377 IC: 579C-A2377	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device	Page 143 of 160

Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 8
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

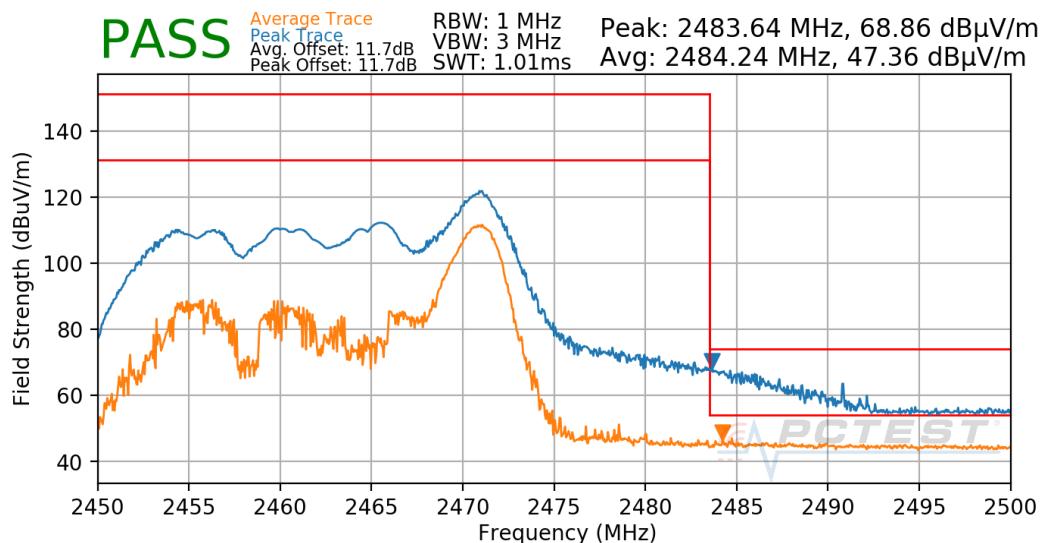

Plot 7-192. Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU26)


Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 8
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

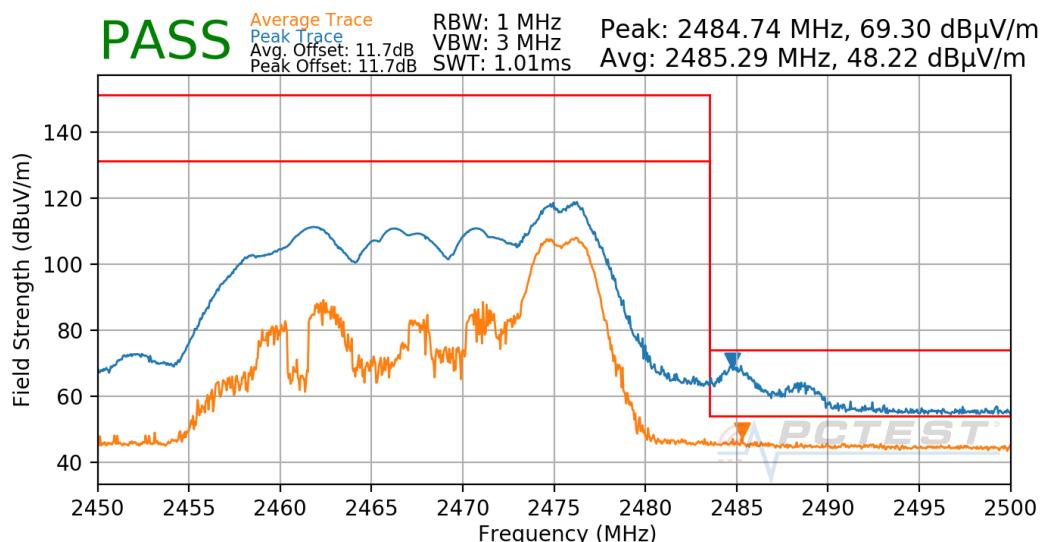

Plot 7-193. Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU26)


FCC ID: BCGA2377 IC: 579C-A2377	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device		Page 144 of 160

Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

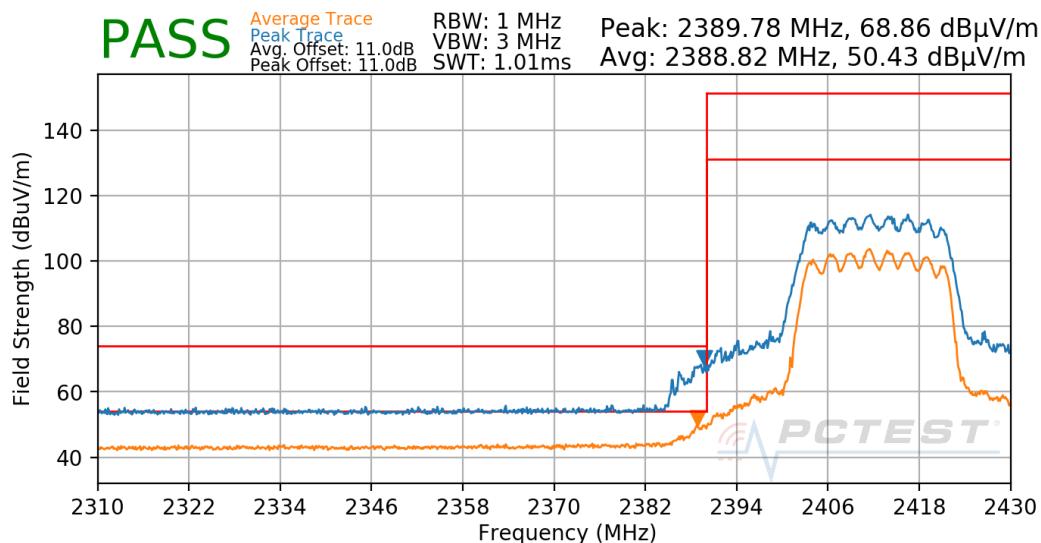

Plot 7-194. Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU242)


Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2417MHz
 Channel: 2

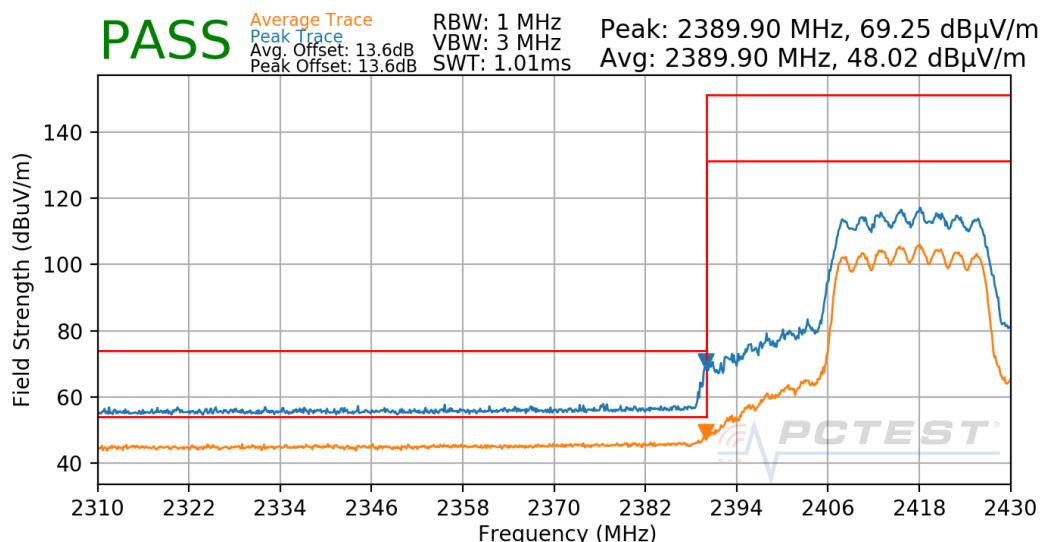

Plot 7-195. Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU242)


FCC ID: BCGA2377 IC: 579C-A2377	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device		Page 145 of 160

Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2422MHz
 Channel: 3

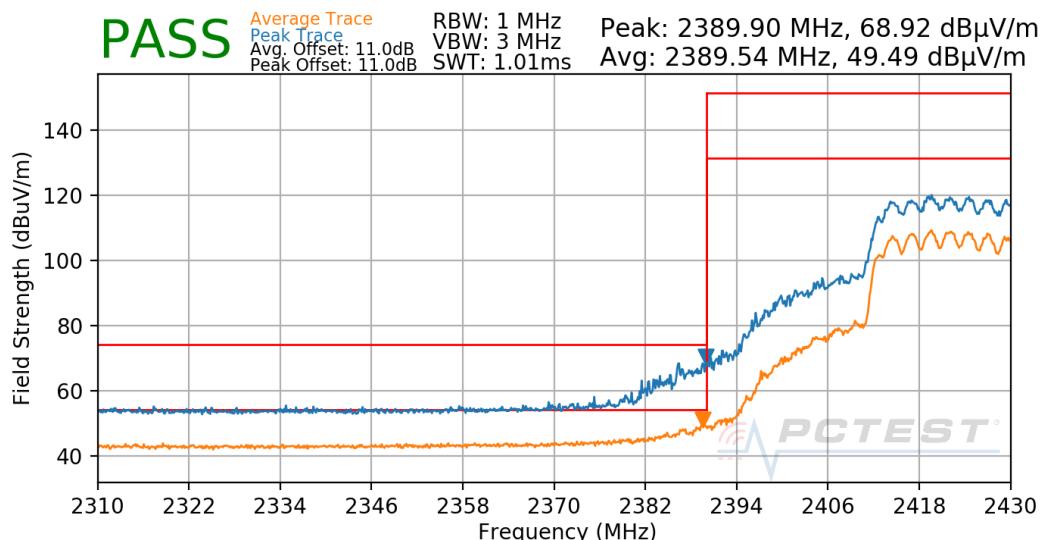

Plot 7-196. Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU242)


Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 8
 Distance of Measurements: 3 Meters
 Operating Frequency: 2447MHz
 Channel: 8

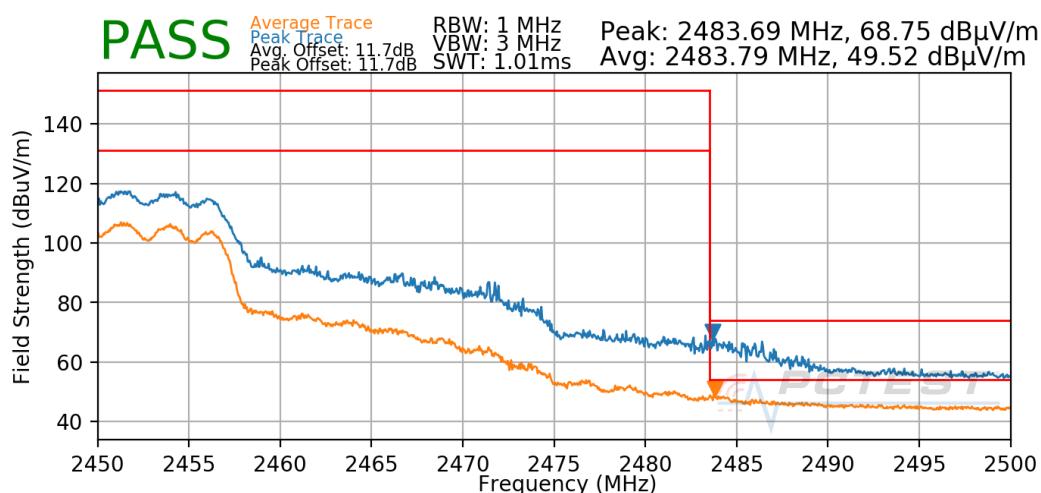

Plot 7-197. Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU242)


FCC ID: BCGA2377 IC: 579C-A2377	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device	Page 146 of 160

Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2452MHz
 Channel: 9

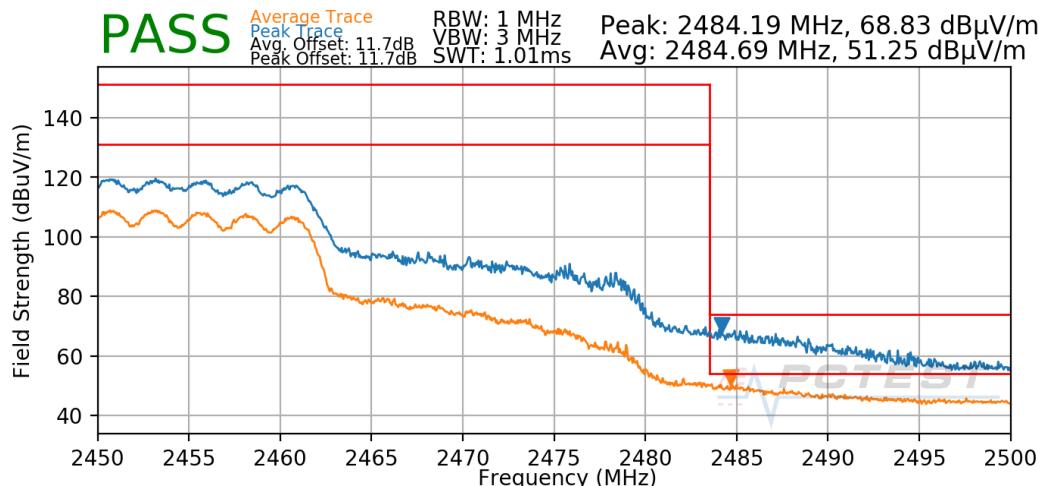

Plot 7-198. Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU242)


Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2457MHz
 Channel: 10

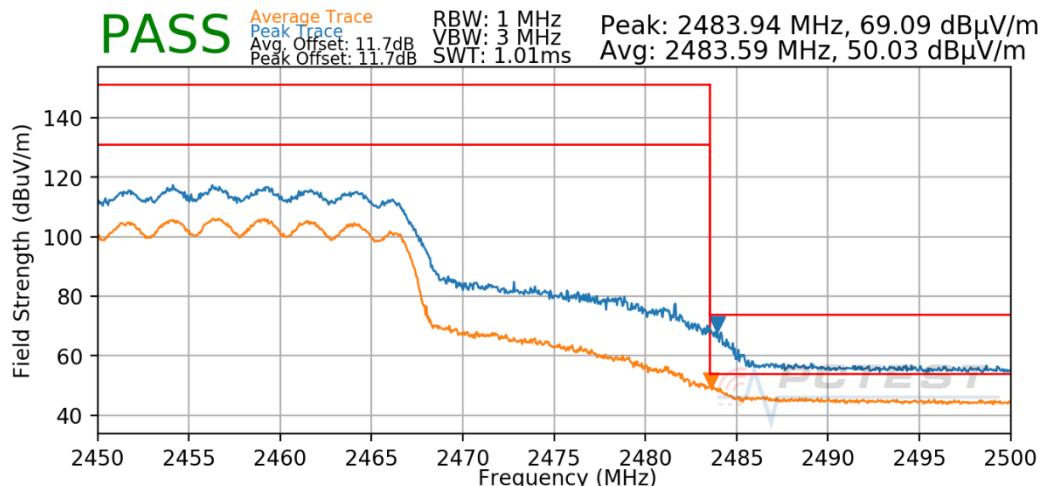

Plot 7-199. Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU242)


FCC ID: BCGA2377 IC: 579C-A2377	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device	Page 147 of 160

Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

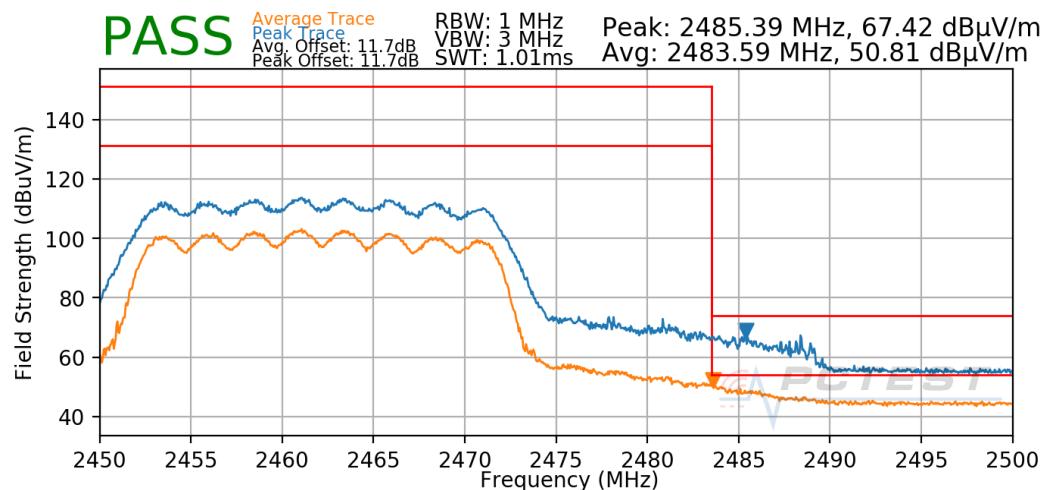

Plot 7-200. Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU242)

Mode: 802.11ax OFDMA
 Data Rate: MCS5
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

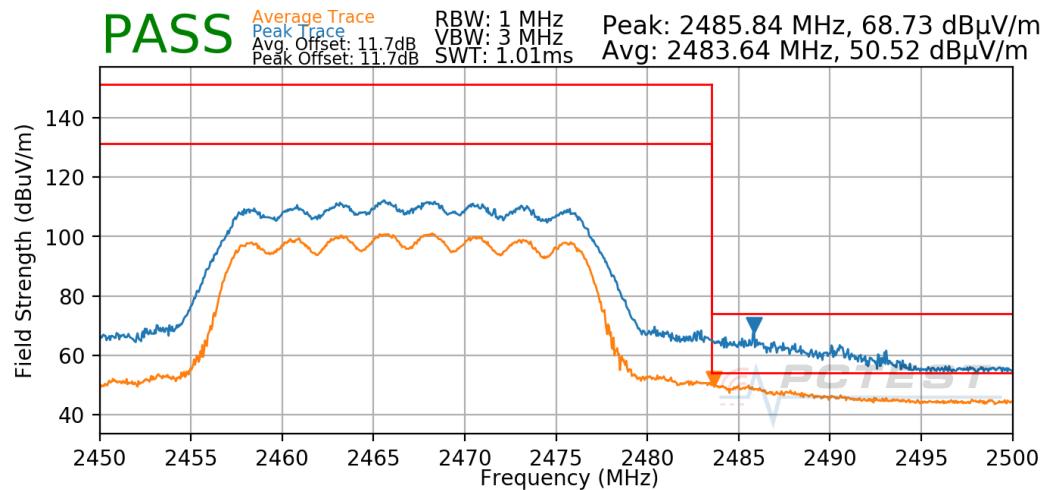

Plot 7-201. Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU242)

FCC ID: BCGA2377 IC: 579C-A2377	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device	Page 148 of 160

7.8 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-38 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-38. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold

FCC ID: BCGA2377 IC: 579C-A2377	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device	Page 149 of 160

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

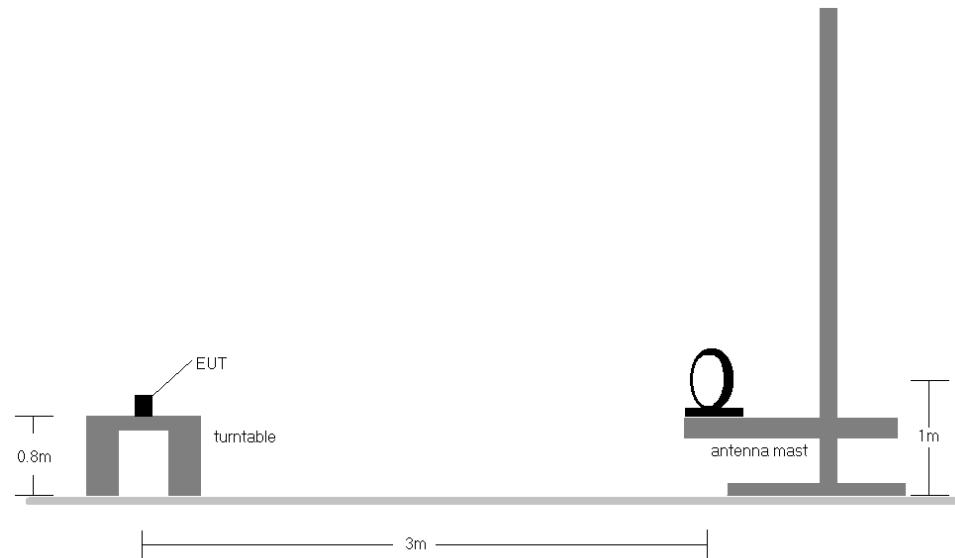


Figure 7-7. Radiated Test Setup < 30Mhz

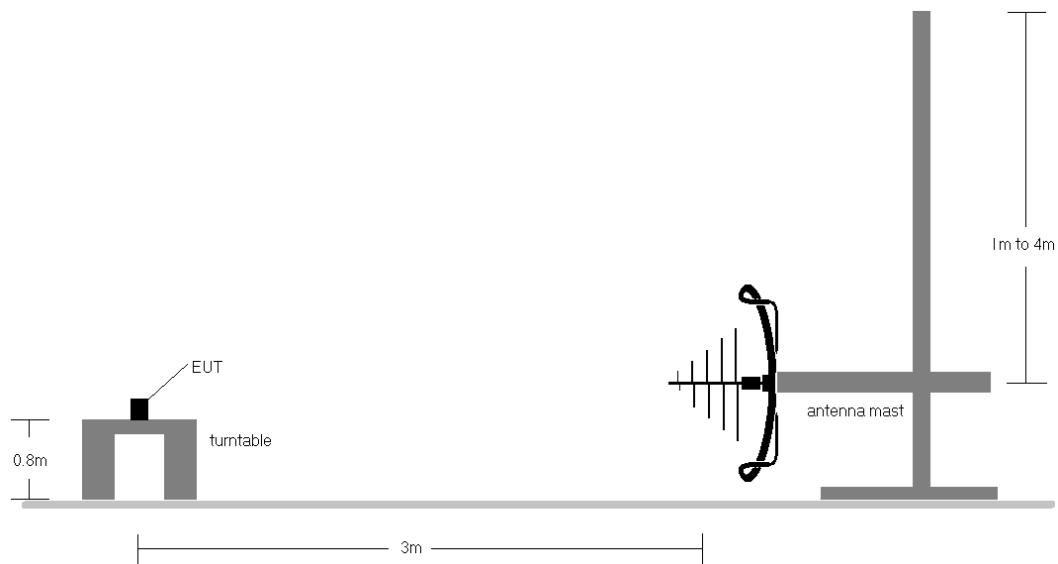


Figure 7-8. Radiated Test Setup < 1GHz

FCC ID: BCGA2377 IC: 579C-A2377	 PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device		Page 150 of 160

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen(8.10) are below the limit shown in Table 7-38.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
8. No spurious emissions were detected within 20dB of the limit below 30MHz.
9. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
10. All antenna configurations and data rates were investigated and only the worst case are reported.
11. For radiated measurements, emissions were investigated for the fully-loaded RU configuration and for all the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.

Sample Calculations


Determining Spurious Emissions Levels

- Field Strength Level [$\text{dB}_{\mu\text{V/m}}$] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] – Preamplifier Gain [dB]
- Margin [dB] = Field Strength Level [$\text{dB}_{\mu\text{V/m}}$] – Limit [$\text{dB}_{\mu\text{V/m}}$]

FCC ID: BCGA2377 IC: 579C-A2377	 PCTEST[®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device	Page 151 of 160

CDD Radiated Spurious Emissions Measurements (Below 1GHz)


§15.209; RSS-Gen [8.9]

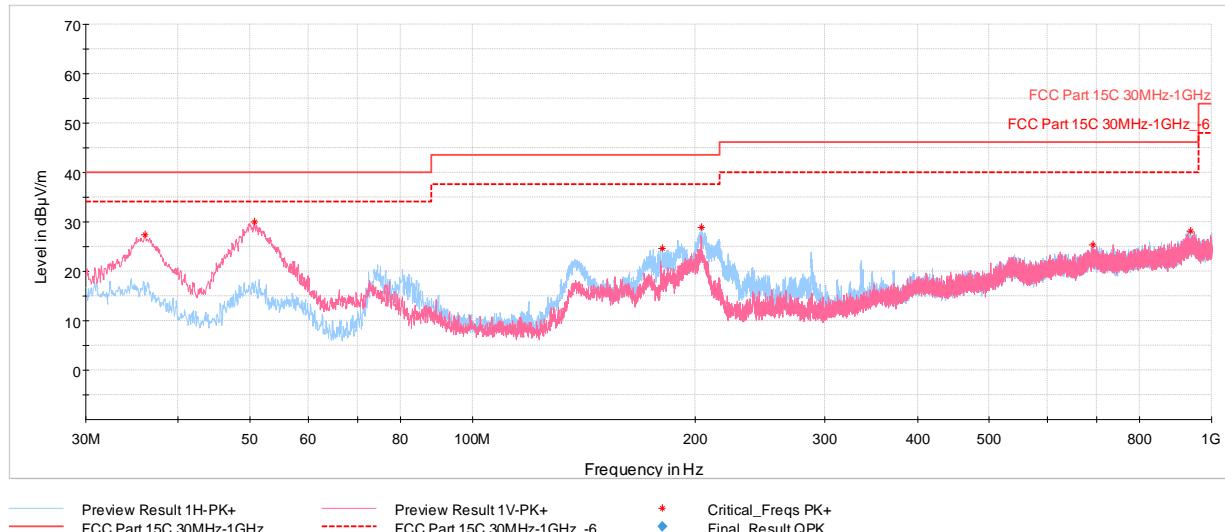


Plot 7-202. Radiated Spurious Emissions below 1GHz CDD Ch.6 (RU26), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
36.11	Quasi-Peak	V	100	180	-64.76	-15.51	26.73	40.00	-13.27
50.76	Quasi-Peak	V	100	62	-55.97	-21.03	30.00	40.00	-10.00
180.59	Quasi-Peak	H	100	255	-65.28	-16.67	25.05	43.52	-18.47
203.97	Quasi-Peak	H	100	282	-61.33	-16.35	29.32	43.52	-14.20
690.47	Quasi-Peak	H	100	348	-79.07	-3.66	24.27	46.02	-21.75
936.47	Quasi-Peak	H	250	103	-78.95	-0.70	27.35	46.02	-18.67

Table 7-39. Radiated Spurious Emissions below 1GHz CDD Ch.6 (RU26), with AC/DC Adapter


FCC ID: BCGA2377 IC: 579C-A2377	 PCTEST® Proud to be part of 			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device			

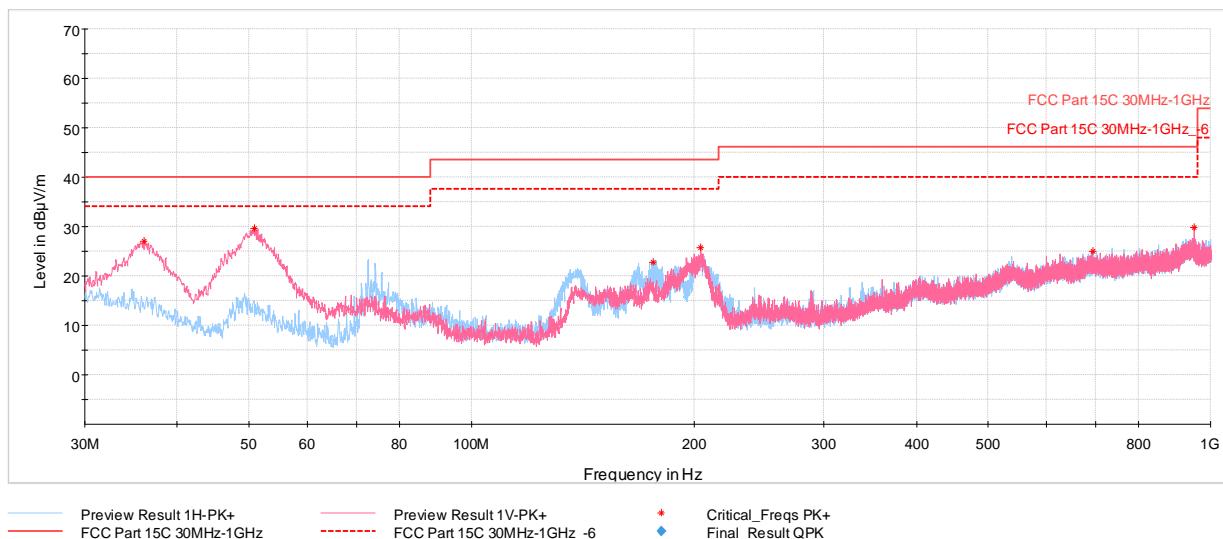

Plot 7-203. Radiated Spurious Emissions below 1GHz CDD Ch.6 (RU242), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
36.11	Quasi-Peak	V	100	274	-65.11	-15.51	26.38	40.00	-13.62
50.86	Quasi-Peak	V	100	69	-56.22	-21.03	29.75	40.00	-10.25
176.08	Quasi-Peak	H	250	255	-67.34	-17.00	22.66	43.52	-20.86
204.21	Quasi-Peak	V	100	92	-64.50	-16.33	26.17	43.52	-17.35
693.72	Quasi-Peak	H	250	23	-79.32	-3.47	24.21	46.02	-21.81
950.72	Quasi-Peak	V	250	179	-77.09	-1.06	28.85	46.02	-17.17

Table 7-40. Radiated Spurious Emissions below 1GHz CDD Ch.6 (RU242), with AC/DC Adapter

FCC ID: BCGA2377 IC: 579C-A2377	 PCTEST® Proud to be part of 			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device			

7.9 AC Line-Conducted Emissions Measurement

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-41. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA2377 IC: 579C-A2377	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device	Page 154 of 160

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


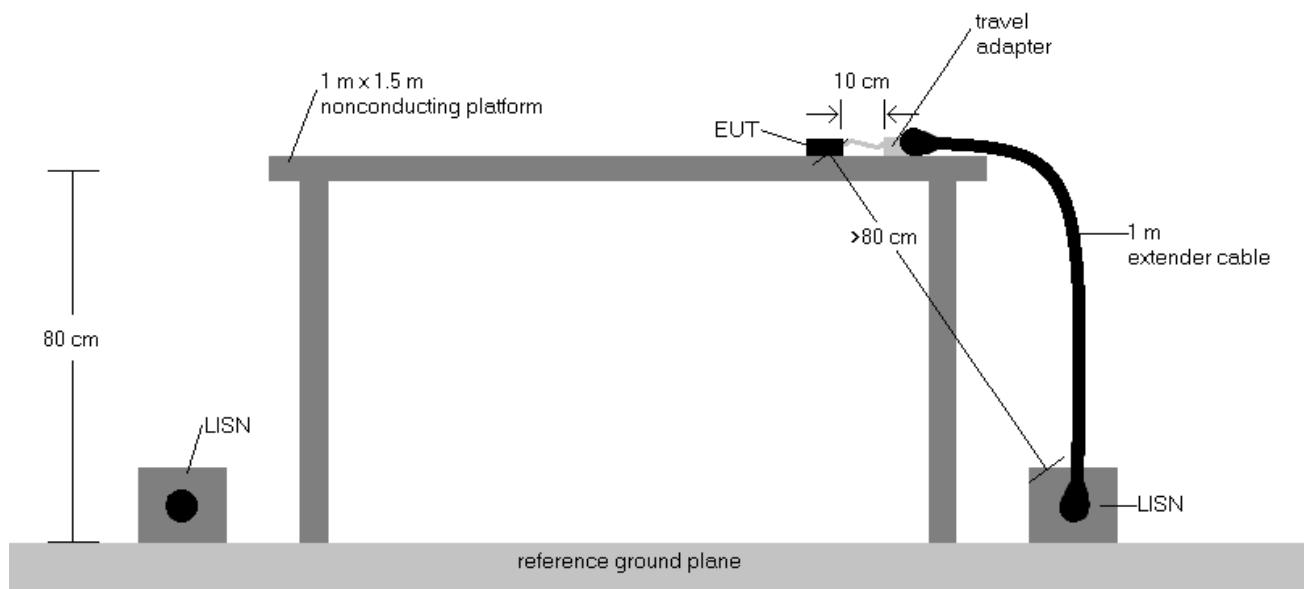


Figure 7-9. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dB μ V) = QP/AV Analyzer/Receiver Level (dB μ V) + Correction Factor (dB)
6. Margin (dB) = QP/AV Level (dB μ V) - QP/AV Limit (dB μ V)
7. Traces shown in plot are made using quasi peak and average detectors.
8. Deviations to the Specifications: None.
9. All RU's were investigated and only worst case partially-loaded and fully-loaded RU's are reported.

FCC ID: BCGA2377 IC: 579C-A2377	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device	Page 155 of 160

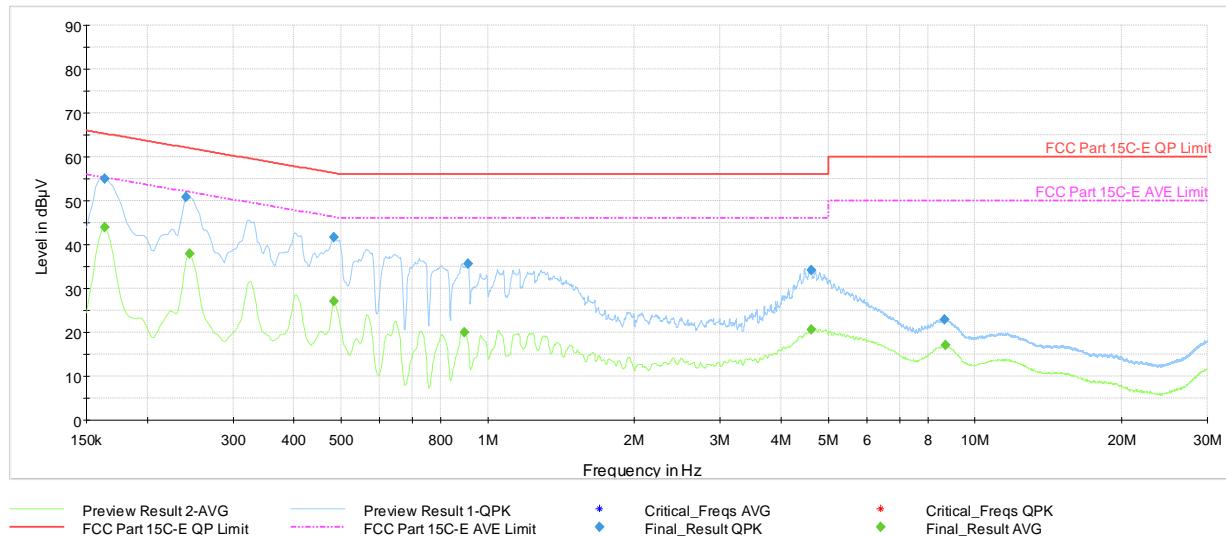


Plot 7-204. AC Line Conducted Emissions with CDD 802.11ax (RU26) Ch.6 (L1, with Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.164	FINAL	55.0	—	65.28	-10.26	L1	GND
0.164	FINAL	—	43.87	55.28	-11.42	L1	GND
0.240	FINAL	50.8	—	62.10	-11.30	L1	GND
0.245	FINAL	—	38.01	51.94	-13.94	L1	GND
0.483	FINAL	—	27.02	46.29	-19.26	L1	GND
0.483	FINAL	41.8	—	56.29	-14.54	L1	GND
0.895	FINAL	—	20.00	46.00	-26.00	L1	GND
0.911	FINAL	35.5	—	56.00	-20.46	L1	GND
4.614	FINAL	—	20.72	46.00	-25.28	L1	GND
4.616	FINAL	34.2	—	56.00	-21.79	L1	GND
8.673	FINAL	22.9	—	60.00	-37.15	L1	GND
8.687	FINAL	—	16.98	50.00	-33.02	L1	GND

Table 7-42. AC Line Conducted Data with CDD 802.11ax (RU26) Ch.6 (L1, with Adapter)

FCC ID: BCGA2377 IC: 579C-A2377	PCTEST Proud to be part of 			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device			

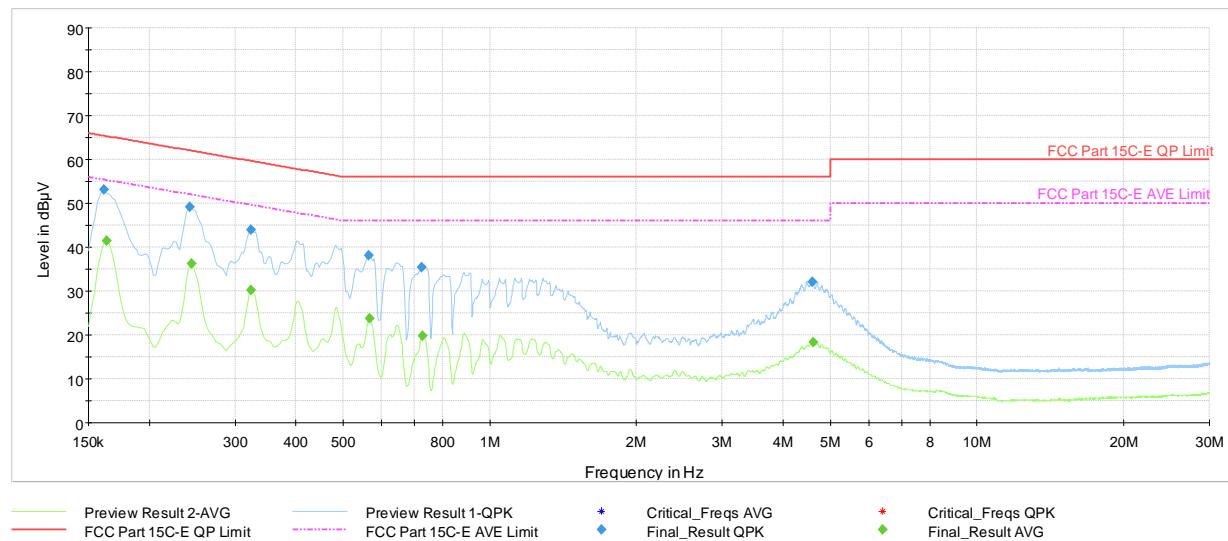


Plot 7-205. AC Line Conducted Emissions with CDD 802.11ax (RU26) Ch.6 (N, with Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.161	FINAL	53.0	—	65.40	-12.36	N	GND
0.164	FINAL	—	41.46	55.28	-13.82	N	GND
0.242	FINAL	49.2	—	62.02	-12.84	N	GND
0.245	FINAL	—	36.29	51.94	-15.66	N	GND
0.323	FINAL	44.0	—	59.62	-15.67	N	GND
0.323	FINAL	—	30.18	49.62	-19.44	N	GND
0.564	FINAL	38.1	—	56.00	-17.91	N	GND
0.566	FINAL	—	23.73	46.00	-22.27	N	GND
0.726	FINAL	35.5	—	56.00	-20.51	N	GND
0.728	FINAL	—	19.85	46.00	-26.15	N	GND
4.598	FINAL	32.0	—	56.00	-23.99	N	GND
4.605	FINAL	—	18.33	46.00	-27.67	N	GND

Table 7-43. AC Line Conducted Data with CDD 802.11ax (RU26) Ch.6 (N, with Adapter)

FCC ID: BCGA2377 IC: 579C-A2377	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device	Page 157 of 160	

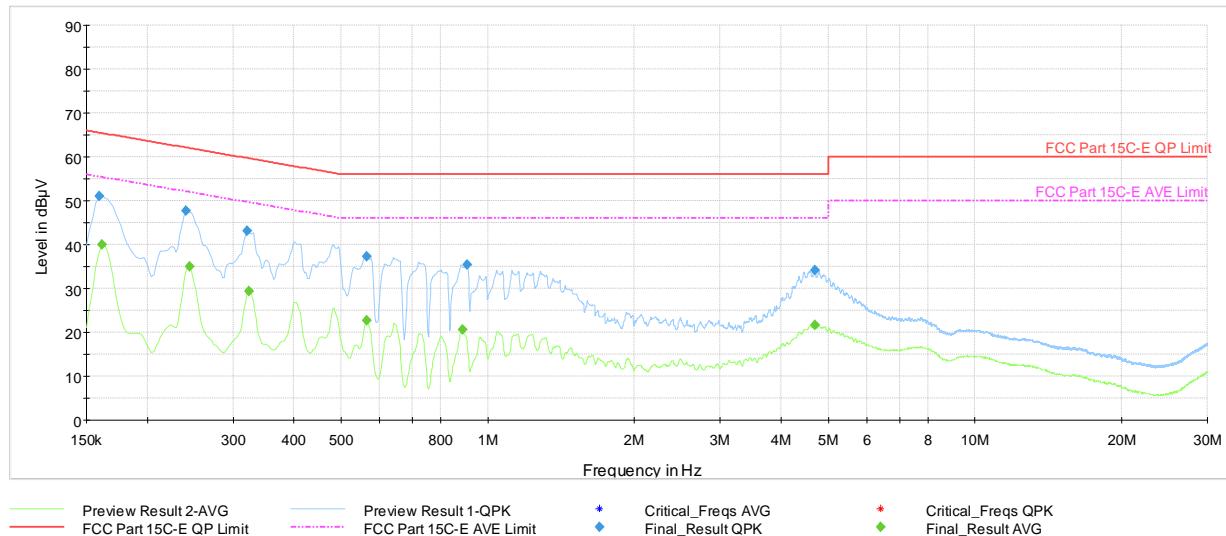


Plot 7-206. AC Line Conducted Emissions with CDD 802.11ax (RU242) Ch.6 (L1, with Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.159	FINAL	51.0	—	65.52	-14.54	L1	GND
0.161	FINAL	—	40.06	55.40	-15.34	L1	GND
0.240	FINAL	47.7	—	62.10	-14.38	L1	GND
0.245	FINAL	—	34.93	51.94	-17.01	L1	GND
0.321	FINAL	43.1	—	59.68	-16.58	L1	GND
0.323	FINAL	—	29.33	49.62	-20.29	L1	GND
0.564	FINAL	—	22.77	46.00	-23.23	L1	GND
0.564	FINAL	37.3	—	56.00	-18.66	L1	GND
0.886	FINAL	—	20.62	46.00	-25.38	L1	GND
0.908	FINAL	35.4	—	56.00	-20.65	L1	GND
4.686	FINAL	34.1	—	56.00	-21.88	L1	GND
4.693	FINAL	—	21.66	46.00	-24.34	L1	GND

Table 7-44. AC Line Conducted Data with CDD 802.11ax (RU242) Ch.6 (L1, with Adapter)

FCC ID: BCGA2377 IC: 579C-A2377	 PCTEST® Proud to be part of  MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device	Page 158 of 160	

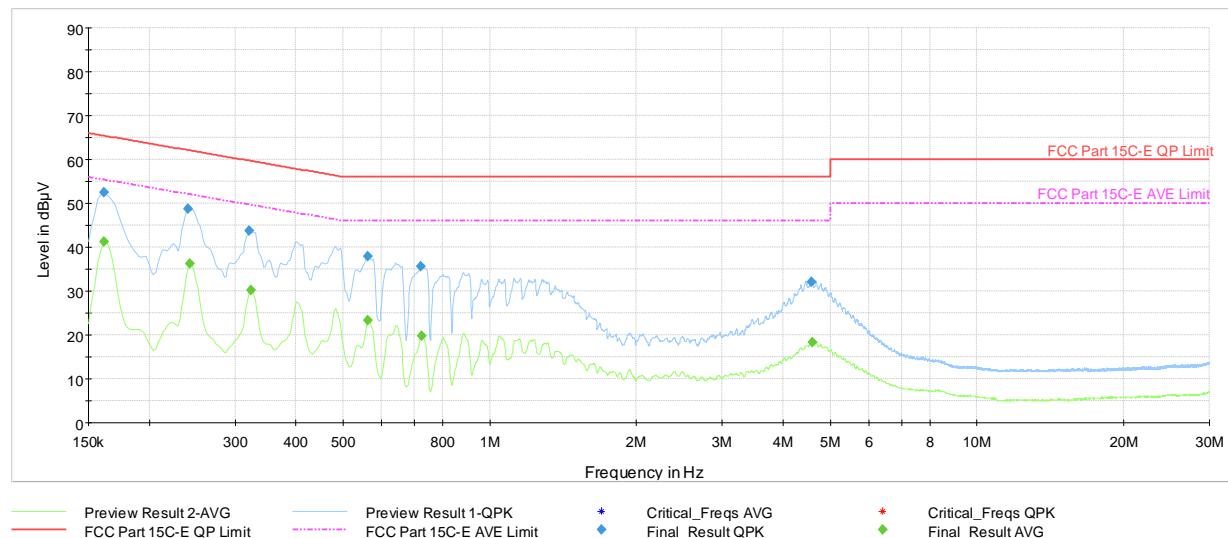

Plot 7-207. AC Line Conducted Emissions with CDD 802.11ax (RU242) Ch.6 (N, with Adapter)


Frequency [MHz]	Process State	QuasiPeak [dB μ V]	Average [dB μ V]	Limit [dB μ V]	Margin [dB]	Line	PE
0.161	FINAL	52.5	—	65.40	-12.93	N	GND
0.161	FINAL	—	41.29	55.40	-14.11	N	GND
0.240	FINAL	48.0	—	62.10	-13.26	N	GND
0.242	FINAL	—	36.21	52.02	-15.81	N	GND
0.321	FINAL	43.8	—	59.68	-15.85	N	GND
0.323	FINAL	—	30.16	49.62	-19.47	N	GND
0.562	FINAL	—	23.25	46.00	-22.75	N	GND
0.562	FINAL	38.0	—	56.00	-18.03	N	GND
0.722	FINAL	35.7	—	56.00	-20.35	N	GND
0.724	FINAL	—	19.89	46.00	-26.11	N	GND
4.567	FINAL	32.2	—	56.00	-23.82	N	GND
4.583	FINAL	—	18.33	46.00	-27.67	N	GND

Table 7-45. AC Line Conducted Data with CDD 802.11ax (RU242) Ch.6 (N, with Adapter)

FCC ID: BCGA2377 IC: 579C-A2377	 PCTEST® Proud to be part of  MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device	Page 159 of 160	

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA2377, IC: 579C-A2377** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA2377 IC: 579C-A2377	 PCTEST [®] Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020001-03-R1.BCG	Test Dates: 01/15/2021 - 03/18/2021	EUT Type: Tablet Device		Page 160 of 160