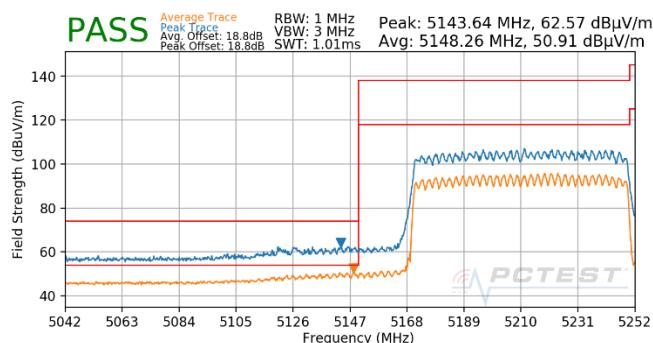
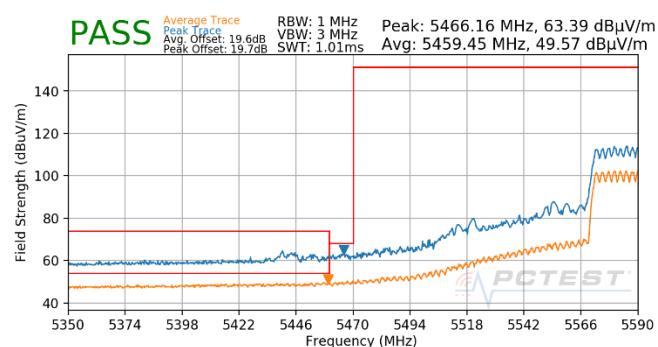
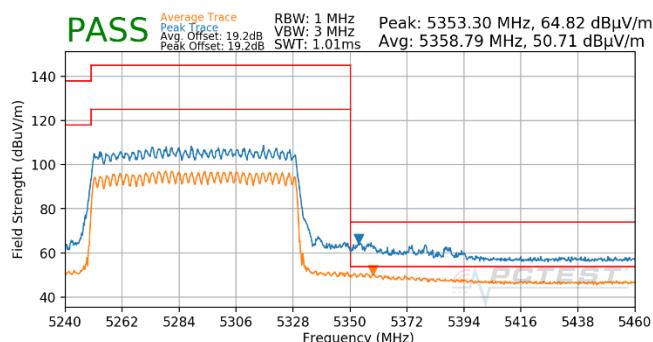
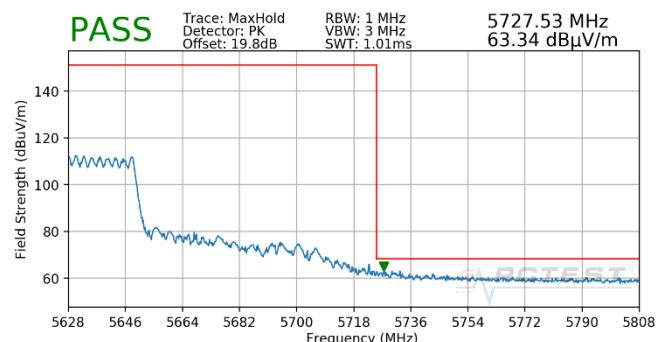
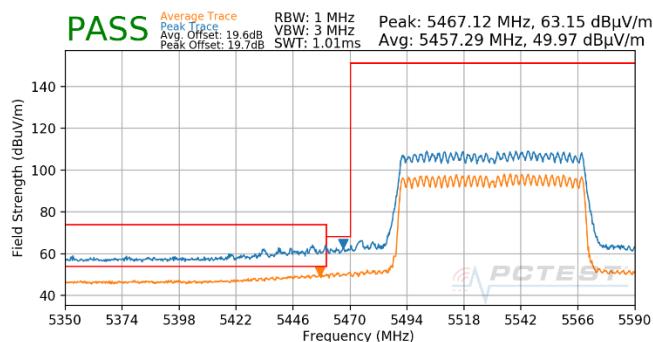
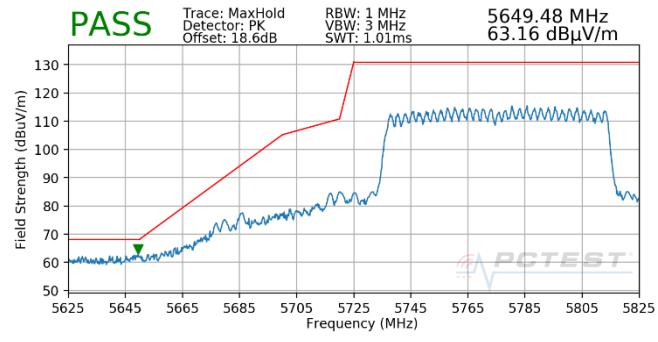
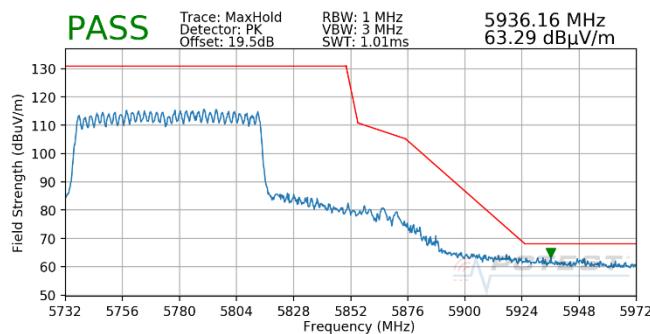


RU996

Plot 7-565. CDD (Pk & Avg, RU996, Index 67, Ch.42, MCS11)

Plot 7-568. (FCC Only) CDD (Pk & Avg, RU996, Index 67, Ch.122, MCS11)

Plot 7-566. CDD (Pk & Avg, RU996, Index 67, Ch.58, MCS11)

Plot 7-569. (FCC Only) CDD (Pk, RU996, Index 67, Ch.122, MCS11)

Plot 7-567. CDD (Pk & Avg, RU996, Index 67, Ch.106, MCS11)

Plot 7-570. CDD (Pk, RU996, Index 67, Ch.155, MCS11)

FCC ID: BCGA2378 IC: 579C-A2378	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-09.BCG	Test Dates: 02/15/2021 - 3/10/2021	EUT Type: Tablet Device	Page 239 of 250



Plot 7-571. CDD (Pk, RU996, Index 67, Ch.155, MCS11)

FCC ID: BCGA2378 IC: 579C-A2378	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-09.BCG	Test Dates: 02/15/2021 - 3/10/2021	EUT Type: Tablet Device	Page 240 of 250

7.7 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-155 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-155. Radiated Limits

Test Procedures Used

ANSI C63.10-2013


Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA2378 IC: 579C-A2378	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-09.BCG	Test Dates: 02/15/2021 - 3/10/2021	EUT Type: Tablet Device	Page 241 of 250

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

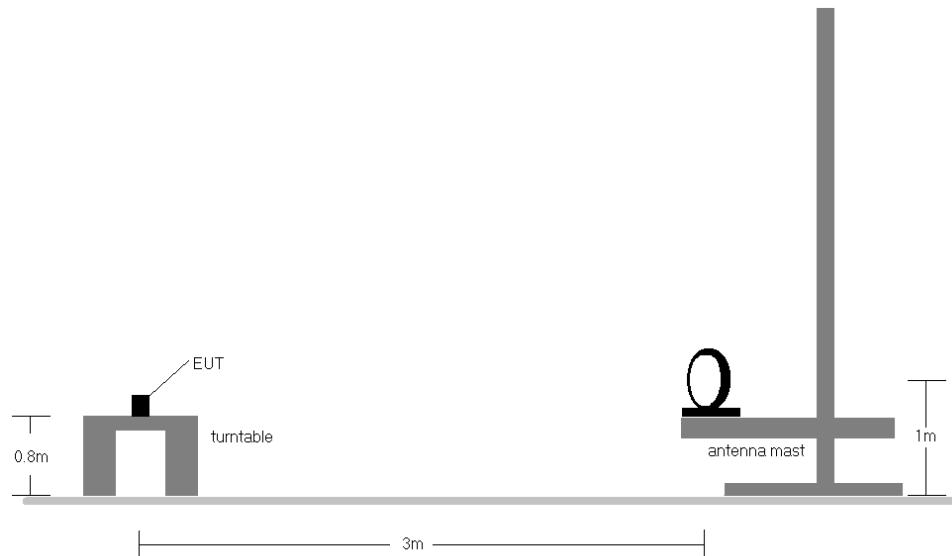


Figure 7-6. Radiated Test Setup < 30MHz

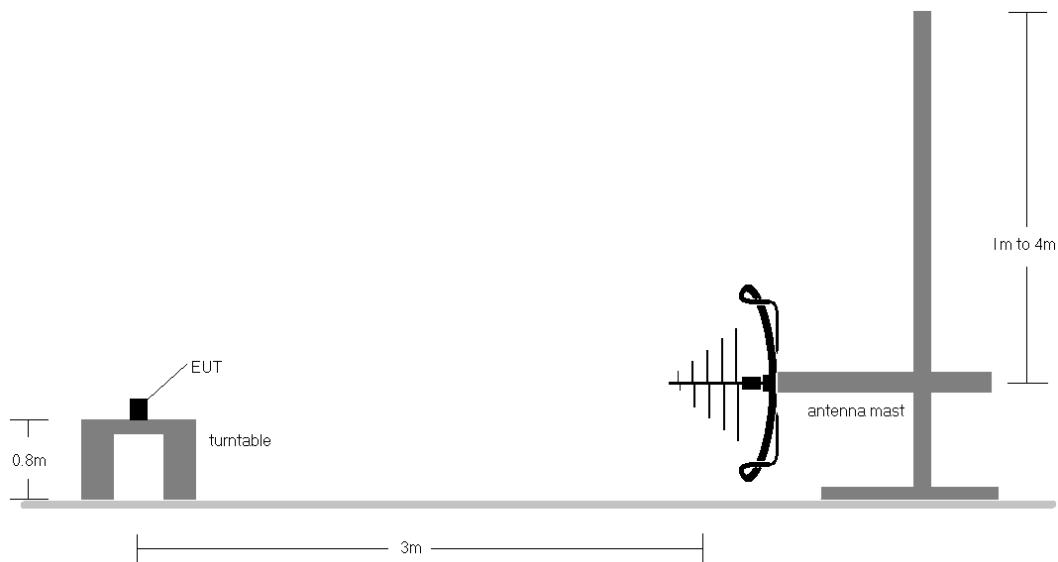


Figure 7-7. Radiated Test Setup < 1GHz

FCC ID: BCGA2378 IC: 579C-A2378	PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-09.BCG	Test Dates: 02/15/2021 - 3/10/2021	EUT Type: Tablet Device	Page 242 of 250

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-155.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
9. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
10. All antenna configurations and data rates were investigated and only the worst case are reported.

Sample Calculations


Determining Spurious Emissions Levels

- Field Strength Level $[\text{dB}_{\mu\text{V/m}}]$ = Analyzer Level $[\text{dBm}]$ + 107 + AFCL $[\text{dB}/\text{m}]$
- AFCL $[\text{dB}/\text{m}]$ = Antenna Factor $[\text{dB}/\text{m}]$ + Cable Loss $[\text{dB}]$ – Preamplifier Gain $[\text{dB}]$
- Margin $[\text{dB}]$ = Field Strength Level $[\text{dB}_{\mu\text{V/m}}]$ – Limit $[\text{dB}_{\mu\text{V/m}}]$

FCC ID: BCGA2378 IC: 579C-A2378	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-09.BCG	Test Dates: 02/15/2021 - 3/10/2021	EUT Type: Tablet Device	Page 243 of 250

CDD/SDM Radiated Spurious Emissions (Below 1GHz)


§15.209; RSS-Gen [8.9]

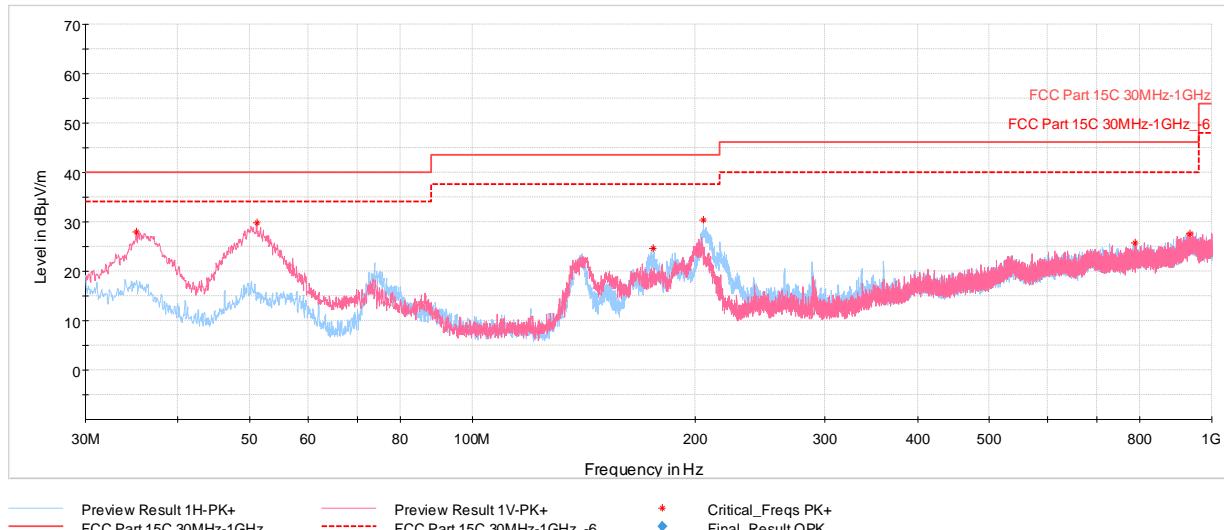


Plot 7-572. RSE below 1GHz CDD/SDM (RU26 – Ch.36), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
35.14	Max Peak	V	100	295	-64.65	-14.33	28.02	40.00	-11.98
51.15	Max Peak	V	100	62	-56.14	-21.04	29.82	40.00	-10.18
175.65	Max Peak	H	100	284	-65.35	-16.95	24.70	43.52	-18.82
205.33	Max Peak	H	100	298	-59.92	-16.61	30.47	43.52	-13.06
787.13	Max Peak	V	250	22	-78.90	-2.36	25.74	46.02	-20.28
933.31	Max Peak	V	250	39	-79.56	0.31	27.75	46.02	-18.27

Table 7-156. RSE below 1GHz CDD/SDM (RU26 – Ch.36), with AC/DC Adapter


FCC ID: BCGA2378 IC: 579C-A2378	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2101020004-09.BCG	Test Dates: 02/15/2021 - 3/10/2021	EUT Type: Tablet Device			

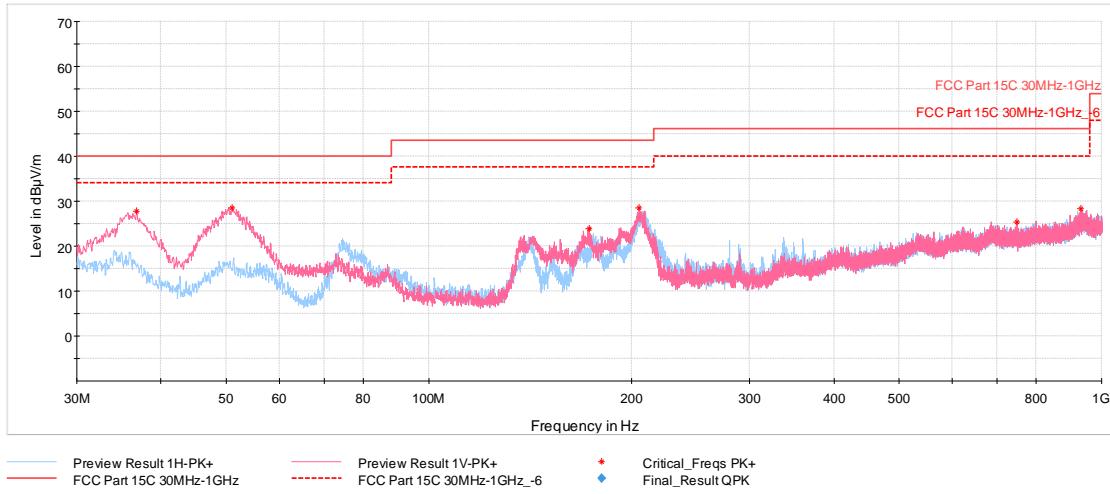

Plot 7-573. RSE below 1GHz CDD/SDM (RU242 – Ch.36), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
36.79	Max Peak	V	100	288	-63.98	-15.24	27.78	40.00	-12.22
51.05	Max Peak	V	100	80	-57.36	-21.03	28.61	40.00	-11.39
173.12	Max Peak	V	100	353	-66.03	-17.12	23.85	43.52	-19.67
205.28	Max Peak	V	100	76	-61.78	-16.62	28.60	43.52	-14.92
748.53	Max Peak	V	250	1	-78.32	-3.18	25.50	46.02	-20.52
930.11	Max Peak	V	100	243	-78.60	0.08	28.48	46.02	-17.54

Table 7-157. RSE below 1GHz CDD/SDM (RU242– Ch.36), with AC/DC Adapter

FCC ID: BCGA2378 IC: 579C-A2378	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2101020004-09.BCG	Test Dates: 02/15/2021 - 3/10/2021	EUT Type: Tablet Device			

7.8 AC Line Conducted Emission Measurement

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. All data rates and modes were investigated for AC Line conducted spurious emissions.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-158. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

7. Analyzer center frequency was set to the frequency of the spurious emission of interest
8. RBW = 9kHz (for emissions from 150kHz – 30MHz)
9. Detector = RMS
10. Sweep time = auto couple
11. Trace mode = max hold
12. Trace was allowed to stabilize

FCC ID: BCGA2378 IC: 579C-A2378	 PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-09.BCG	Test Dates: 02/15/2021 - 3/10/2021	EUT Type: Tablet Device	Page 246 of 250	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


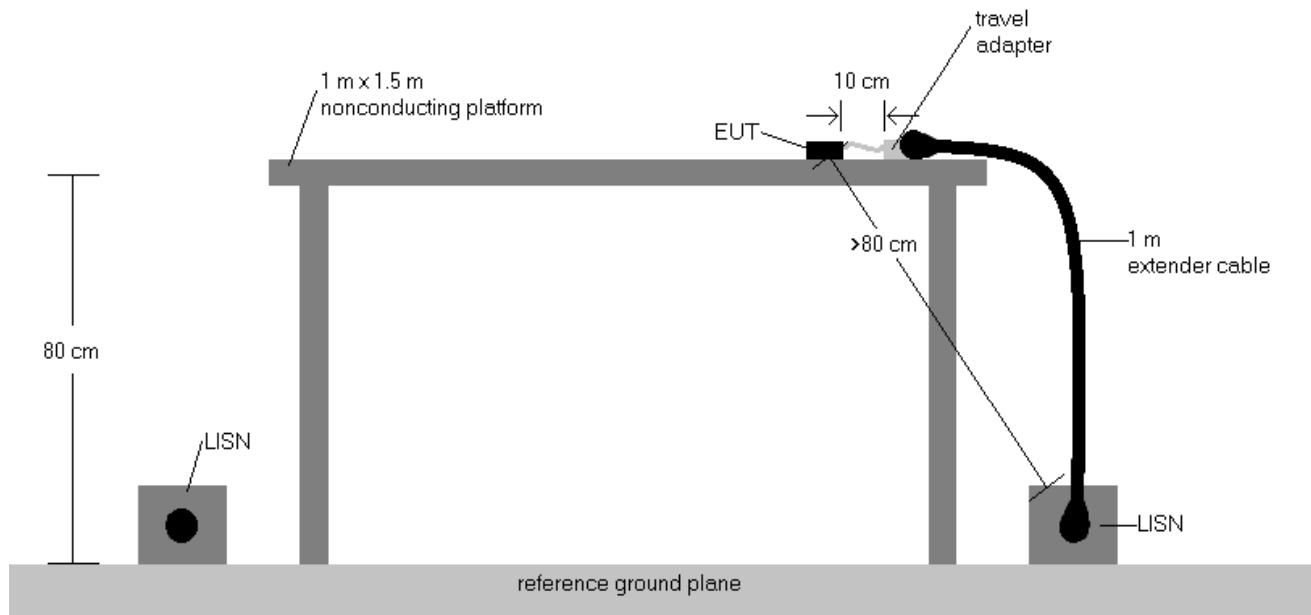


Figure 7-8. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dB μ V) = QP/AV Analyzer/Receiver Level (dB μ V) + Correction Factor (dB)
6. Margin (dB) = QP/AV Level (dB μ V) - QP/AV Limit (dB μ V)
7. Traces shown in plots are made using quasi-peak and average detectors.
8. Deviations to the Specifications: None.

FCC ID: BCGA2378 IC: 579C-A2378	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-09.BCG	Test Dates: 02/15/2021 - 3/10/2021	EUT Type: Tablet Device	Page 247 of 250

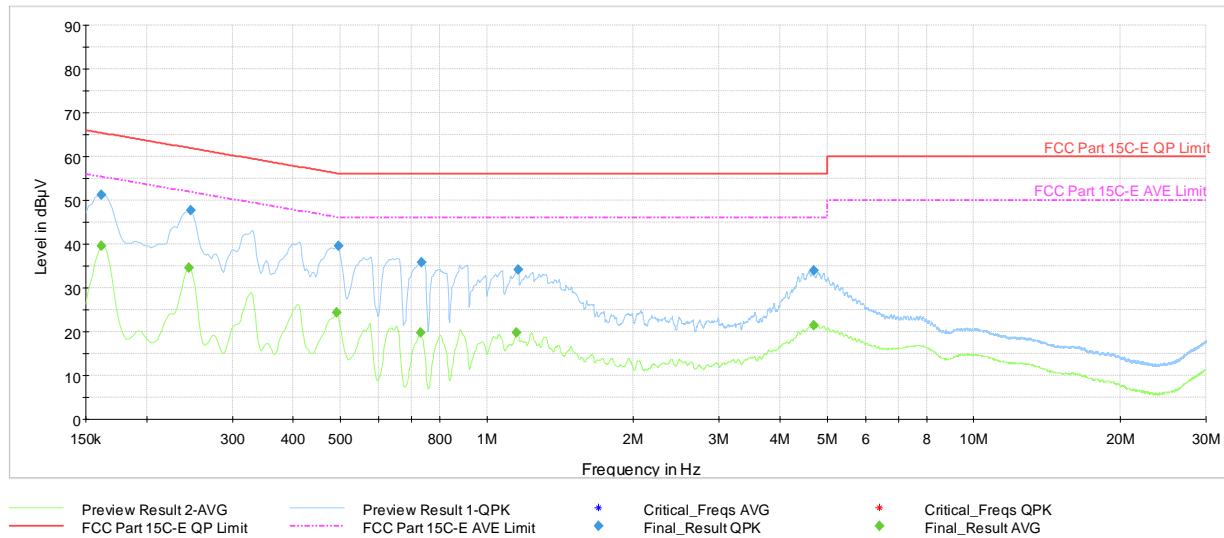


Plot 7-574. AC Line Conducted Plot with CDD/SDM 11ax UNII Band 1 – RU26 – Ch.40 (L1) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.161	FINAL	51.3	—	65.40	-14.13	L1	GND
0.161	FINAL	—	39.68	55.40	-15.72	L1	GND
0.245	FINAL	—	34.65	51.94	-17.30	L1	GND
0.247	FINAL	47.7	—	61.87	-14.20	L1	GND
0.492	FINAL	—	24.36	46.13	-21.77	L1	GND
0.497	FINAL	39.6	—	56.06	-16.43	L1	GND
0.731	FINAL	—	19.71	46.00	-26.29	L1	GND
0.733	FINAL	35.8	—	56.00	-20.19	L1	GND
1.151	FINAL	—	19.76	46.00	-26.24	L1	GND
1.158	FINAL	34.1	—	56.00	-21.90	L1	GND
4.688	FINAL	34.0	—	56.00	-21.96	L1	GND
4.693	FINAL	—	21.55	46.00	-24.45	L1	GND

Table 7-159. AC Line Conducted with CDD/SDM 11ax UNII Band 1 – RU26 – Ch.40 (L1) with AC/DC Adapter

FCC ID: BCGA2378 IC: 579C-A2378	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2101020004-09.BCG	Test Dates: 02/15/2021 - 3/10/2021	EUT Type: Tablet Device			

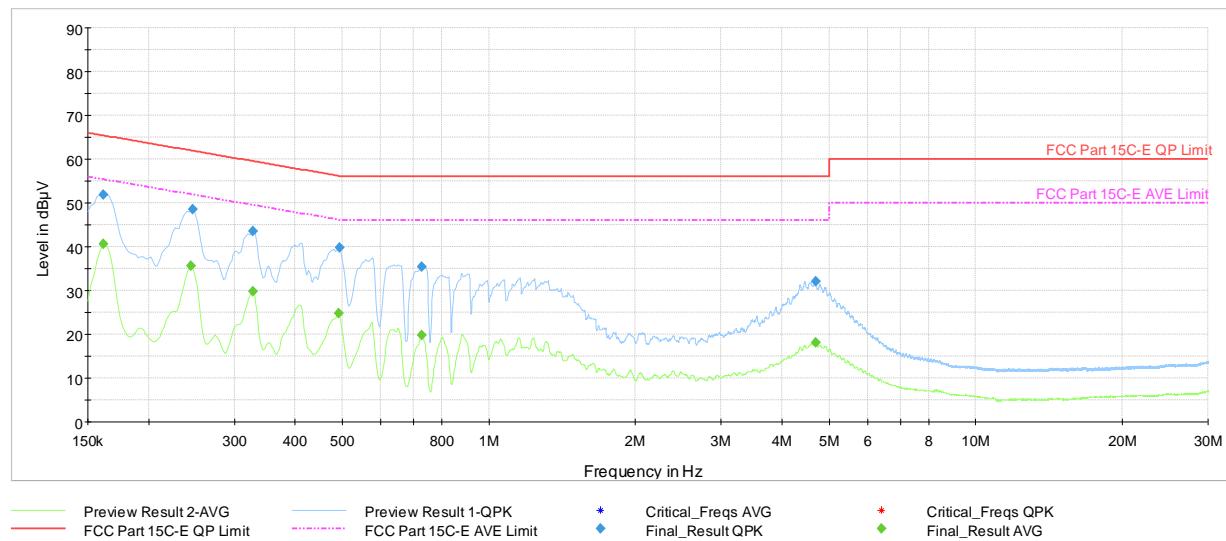

Plot 7-575. AC Line Conducted Plot with CDD/SDM 11ax UNII Band 1 – RU26 – Ch.40 (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.161	FINAL	52.0	—	65.40	-13.43	N	GND
0.161	FINAL	—	40.65	55.40	-14.75	N	GND
0.245	FINAL	—	35.65	51.94	-16.29	N	GND
0.247	FINAL	48.6	—	61.87	-13.29	N	GND
0.328	FINAL	43.5	—	59.51	-16.04	N	GND
0.328	FINAL	—	29.72	49.51	-19.79	N	GND
0.492	FINAL	—	24.78	46.13	-21.35	N	GND
0.494	FINAL	39.8	—	56.10	-16.35	N	GND
0.728	FINAL	—	19.83	46.00	-26.17	N	GND
0.728	FINAL	35.4	—	56.00	-20.56	N	GND
4.686	FINAL	32.0	—	56.00	-23.99	N	GND
4.688	FINAL	—	18.03	46.00	-27.97	N	GND

Table 7-160. AC Line Conducted with CDD/SDM 11ax UNII Band 1 – RU26 – Ch.40 (N) with AC/DC Adapter

FCC ID: BCGA2378 IC: 579C-A2378	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2101020004-09.BCG	Test Dates: 02/15/2021 - 3/10/2021	EUT Type: Tablet Device			

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device** **FCC ID: BCGA2378** and **IC: 579C-A2378** is in compliance with is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA2378 IC: 579C-A2378	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-09.BCG	Test Dates: 02/15/2021 - 3/10/2021	EUT Type: Tablet Device	Page 250 of 250