



**MEASUREMENT REPORT**  
**FCC PART 15.247 / ISED RSS-247 Bluetooth**

**Applicant Name:**

Apple Inc.  
 One Apple Park Way  
 Cupertino, CA 95014  
 United States

**Date of Testing:**

12/15/2020-2/25/2021

**Test Site/Location:**

PCTEST Lab. Morgan Hill, CA, USA

**Test Report Serial No.:**

1C2101020004-06.BCG


<b>FCC ID:</b>	<b>BCGA2378</b>
<b>IC:</b>	<b>579C-A2378</b>
<b>APPLICANT:</b>	<b>Apple Inc.</b>

**Application Type:** Certification  
**Mode/HVIN:** A2378  
**EUT Type:** Tablet Device  
**Max. RF Output Power:** 56.105 mW (17.49dBm) Peak Conducted  
**Frequency Range:** 2402 – 2480MHz  
**Type of Modulation:** GFSK,  $\pi/4$ -DQPSK, 8DPSK  
**FCC Classification:** FCC Part 15 Spread Spectrum Transmitter (DSS)  
**FCC Rule Part(s):** Part 15 Subpart C (15.247)  
**ISED Specification:** RSS-247 Issue 2  
**Test Procedure(s):** ANSI C63.10-2013

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

  
 Randy Ortanez  
 President


<b>FCC ID:</b> BCGA2378 <b>IC:</b> 579C-A2378	<b>PCTEST</b> Proud to be part of 		<b>MEASUREMENT REPORT</b> <b>(CERTIFICATION)</b>	<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1C2101020004-06.BCG	<b>Test Dates:</b> 12/15/2020-2/25/2021		<b>EUT Type:</b> Tablet Device	<b>Page 1 of 91</b>

## T A B L E   O F   C O N T E N T S

---

1.0	INTRODUCTION .....	3
1.1	Scope .....	3
1.2	PCTEST Test Location.....	3
1.3	Test Facility / Accreditations.....	3
2.0	PRODUCT INFORMATION.....	4
2.1	Equipment Description .....	4
2.2	Device Capabilities .....	4
2.3	Antenna Description .....	6
2.4	Test Support Equipment.....	6
2.5	Test Configuration .....	6
2.6	Software and Firmware .....	7
2.7	EMI Suppression Device(s)/Modifications .....	7
3.0	DESCRIPTION OF TESTS .....	8
3.1	Evaluation Procedure .....	8
3.2	AC Line Conducted Emissions .....	8
3.3	Radiated Emissions.....	9
3.4	Environmental Conditions.....	9
4.0	ANTENNA REQUIREMENTS .....	10
5.0	MEASUREMENT UNCERTAINTY .....	11
6.0	TEST EQUIPMENT CALIBRATION DATA .....	12
7.0	TEST RESULTS.....	13
7.1	Summary .....	13
7.2	Bandwidth Measurement.....	14
7.3	Output Power Measurement.....	24
7.3.1	Peak Output Power Measurement.....	25
7.3.2	Average Output Power Measurement .....	26
7.4	Conducted Authorized Band Edge .....	28
7.5	Carrier Frequency Separation .....	37
7.6	Time of Occupancy.....	42
7.7	Number of Hopping Channels .....	46
7.8	Conducted Spurious Emissions.....	51
7.9	Radiated Spurious Emissions – Above 1GHz .....	58
7.10	Radiated Restricted Band Edge Measurements.....	71
7.11	Radiated Spurious Emissions – Below 1GHz .....	83
7.12	AC Line-Conducted Emissions Measurement .....	87
8.0	CONCLUSION.....	91

FCC ID: BCGA2378 IC: 579C-A2378	 <b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 2 of 91	

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

### 1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Morgan Hill, CA 95037, U.S.A.

- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: BCGA2378 IC: 579C-A2378	 PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 3 of 91	

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA2378 and IC: 579C-A2378**. The test data contained in this report pertains only to the emissions due to the EUT's Bluetooth transmitter.

- This Bluetooth module has been tested by manufacturer, and confirmed the following:
  - A) The hopping sequence is pseudorandom
  - B) All channels are used equally on average
  - C) The receiver input bandwidth equals the transmit bandwidth
  - D) The receiver hops in sequence with the transmit signal
- 15.247(g): In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.
- 15.247(h): In accordance with the Bluetooth Industry Standard, the system does not coordinate its channels selection/ hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.
- 15.247(h): The EUT employs Adaptive Frequency Hopping (AFH) which identifies sources of interference namely devices operating in 802.11 WLAN and excludes them from the list of available channels. The process of re-mapping reduces the number of test channels from 79 channels to a minimum number of 20 channels.

**Test Device Serial No.:** GFKX6C3FQP, V92TV7M62Y, N9GWWYX392, DLX0514005102QL19

### 2.2 Device Capabilities

This device contains the following capabilities:

802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8), WPT

This device supports BT Beamforming.

Ch.	Frequency (MHz)
00	2402
:	:
39	2441
:	:
78	2480

**Table 2-1. Bluetooth Frequency/ Channel Operations**

FCC ID: BCGA2378 IC: 579C-A2378	 PCTEST <sup>®</sup> Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 4 of 91	

**Notes:**

1. This device is capable of operating in hopping and non-hopping mode. The EUT can hop between 79 different channels in the 2400 – 2483.5MHz band. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of KDB 558074 D01 v05r02 and ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Measured Duty Cycles				
Bluetooth mode		Duty Cycle [%]		
		Antenna 8	Antenna 7	TxBF
GFSK	ePA	100	100	100
	iPA	100	100	100
8PSK	ePA	100	100	100
	iPA	100	100	100
$\pi/4$ -DQPSK	ePA	100	100	100
	iPA	100	100	100

**Table 2-2. Measured Duty Cycles**

FCC ID: BCGA2378 IC: 579C-A2378	 <b>PCTEST®</b> Proud to be part of  MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device		

## 2.3 Antenna Description

Following antenna gains provided by manufacturer were used for the testing.

Frequency [GHz]	Antenna Gain (dBi)	
	Antenna 8	Antenna 7
2.4	3.0	3.5

Table 2-3. Highest Antenna Gain

## 2.4 Test Support Equipment

1	Apple MacBook Pro w/AC/DC Adapter	Model: A2141 Model: A2166	S/N: C02DV7VKMD6T S/N: N/A	
2	Apple USB-C Cable	Model: Chimp	S/N: 420A57	
3	USB-C Cable w/ AC Adapter	Model: A146 Model: A2305	S/N: N/A S/N: N/A	
4	Apple Pencil	Model: N/A	S/N: GQXYGSXBJKM9	
5	DC Power Supply	Model: KPS3010D	S/N: N/A	

Table 2-4. Test Support Equipment List

## 2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013. ANSI C63.10-2013 was also used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5, 7.6, 7.7, and 7.8 for antenna port conducted emissions test setups.

There are two vendors of the WiFi/Bluetooth radio modules, variant 1 and variant 2. Both radio modules have the same mechanical outline, same on-board antenna matching circuit, identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. The worst case configuration was found between the two variants. The EUT was also investigated with and without charger.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configuration were investigated and EUT powered by AC/DC was the worst case.

- EUT powered by AC/DC adaptor via USB-C cable with wire charger
- EUT powered by host PC via USB-C cable with wire charger

π/4-DQPSK has been investigated and confirmed as not the worst case.

FCC ID: BCGA2378 IC: 579C-A2378	 <b>PCTEST<sup>®</sup></b> Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device		

## 2.6 Software and Firmware

The test was conducted with firmware version 18E20700y installed on the EUT.

## 2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: BCGA2378 IC: 579C-A2378	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 7 of 91

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) was used in the measurement of the EUT.

**Deviation from measurement procedure.....**None

### 3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50µH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that the cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.12. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.50.40.

FCC ID: BCGA2378 IC: 579C-A2378	 <b>PCTEST</b> Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device		Page 8 of 91

### 3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was rotated about its vertical axis while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

### 3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: BCGA2378 IC: 579C-A2378	 <b>PCTEST®</b> Proud to be part of  <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 9 of 91

## 4.0 ANTENNA REQUIREMENTS

### Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

### Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: BCGA2378 IC: 579C-A2378	 <b>PCTEST</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 10 of 91	

## 5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.65
Line Conducted Disturbance	2.71
Radiated Disturbance (<30MHz)	4.06
Radiated Disturbance (30MHz - 1GHz)	4.30
Radiated Disturbance (1 - 18GHz)	4.78
Radiated Disturbance (>18GHz)	4.79

FCC ID: BCGA2378 IC: 579C-A2378	 PCTEST <sup>®</sup> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 11 of 91

## 6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	3/4/2020	Annual	3/4/2021	MY49430244
Anritsu	ML2496A	Power Meter	4/9/2020	Annual	4/9/2021	2002005
Anritsu	MA2411B	Pulse Power Sensor	3/10/2020	Annual	3/10/2021	1911105
Anritsu	MA2411B	Pulse Power Sensor	3/10/2020	Annual	3/10/2021	1911106
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	8/11/2020	Annual	8/11/2021	T058701-01
COM-POWER	LIN-120A	LISN	3/4/2020	Annual	3/4/2021	241297
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	3/4/2020	Annual	3/4/2021	102325
ETS-Lindgren	3142E	BiConiLog Antenna (30MHz - 6GHz)	9/15/2020	Annual	9/15/2021	208204
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	4/21/2020	Annual	4/21/2021	205956
Rohde & Schwarz	ESW26	EMI Test Receiver	6/1/2020	Annual	6/1/2021	101299
Rohde & Schwarz	ESW44	EMI Test Receiver	8/7/2020	Annual	8/7/2021	101668
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	4/3/2020	Annual	4/3/2021	100052
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Antenna (400MHz-18GHz)	10/2/2020	Annual	10/2/2021	101063
Rohde & Schwarz	HFH2-ZZ	Loop Antenna	3/12/2020	Annual	3/12/2021	100546
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	12/3/2020	Annual	12/3/2021	101648
Rohde & Schwarz	ENV216	Two-Line V-Network (LISN)	12/7/2020	Annual	12/7/2021	101364

Table 6-1. Test Equipment List

**Notes:**

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCGA2378 IC: 579C-A2378	 <b>PCTEST<sup>®</sup></b> Proud to be part of element			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device			

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: Apple Inc.  
 FCC ID: BCGA2378  
 IC: 579C-A2378  
 Method/System: Frequency Hopping Spread Spectrum (FHSS)  
 Number of Channels: 79

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(1)	RSS-247 [5.1(a)]	20dB Bandwidth	N/A	CONDUCTED	N/A	Section 7.2
2.1049	RSS-Gen [6.7]	Occupied Bandwidth	N/A		N/A	Section 7.2
15.247(b)(1)	RSS-247 [5.4(b)]	Peak Transmitter Output Power	< 1 Watt if $\geq$ 75 non-overlapping channels used		PASS	Section 7.3
15.247(a)(1)	RSS-247 [5.1(b)]	Channel Separation	> 2/3 of 20 dB BW for systems with Output Power < 125mW		PASS	Section 7.5
15.247(a)(1)(iii)	RSS-247 [5.1(d)]	Time of Occupancy	< 0.4 sec in 31.6 sec period		PASS	Section 7.6
15.247(a)(1)(iii)	RSS-247 [5.1(d)]	Number of Channels	> 15 Channels		PASS	Section 7.7
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	> 20dBc		PASS	Section 7.4 Section 7.8
15.205 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-247 limits)	RADIATED	PASS	Section 7.9, Section 7.10 Section 7.11
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits (RSS-Gen [8.8] limits)	LINE CONDUCTED	PASS	Section 7.12

**Table 7-1. Summary of Test Results**

**Notes:**

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "BT Auto," Version 3.5.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Chamber Automation," Version 1.3.1.

FCC ID: BCGA2378 IC: 579C-A2378	 PCTEST <sup>®</sup> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 13 of 91

## 7.2 Bandwidth Measurement

§2.1049; §15.247 (a.1); RSS-247 [5.1(a)]; RSS-Gen [6.7]

### Test Overview and Limit

The bandwidth at 20dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

### Test Procedure Used

ANSI C63.10-2013 – Section 6.9.2  
 RSS-Gen [6.7]

### Test Settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 99% occupied bandwidth and the 20dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 20. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% OBW
3. VBW  $\geq$  3 x RBW
4. Reference level set to keep signal from exceeding maximum input mixer level for linear operation.
5. Detector = Peak
6. Trace mode = max hold
7. Sweep = auto couple
8. The trace was allowed to stabilize
9. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

FCC ID: BCGA2378 IC: 579C-A2378	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 14 of 91

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-1. Test Instrument & Measurement Setup**

## Test Notes

All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.


FCC ID: BCGA2378 IC: 579C-A2378	 PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device		Page 15 of 91

## Antenna 8


Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	99% OBW Test Results [kHz]	20dB Bandwidth Test Results [kHz]
2402	1.0	GFSK	ePA	0	883.84	947.80
2441	1.0	GFSK	ePA	39	899.88	947.80
2480	1.0	GFSK	ePA	78	899.22	948.60
2402	3.0	8DPSK	ePA	0	1208.30	1348.00
2441	3.0	8DPSK	ePA	39	1212.80	1360.00
2480	3.0	8DPSK	ePA	78	1209.80	1353.00

Table 7-2. 20dB BW and 99% OBW Measurements Antenna 8

FCC ID: BCGA2378 IC: 579C-A2378	 <b>PCTEST</b> Proud to be part of element			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device			

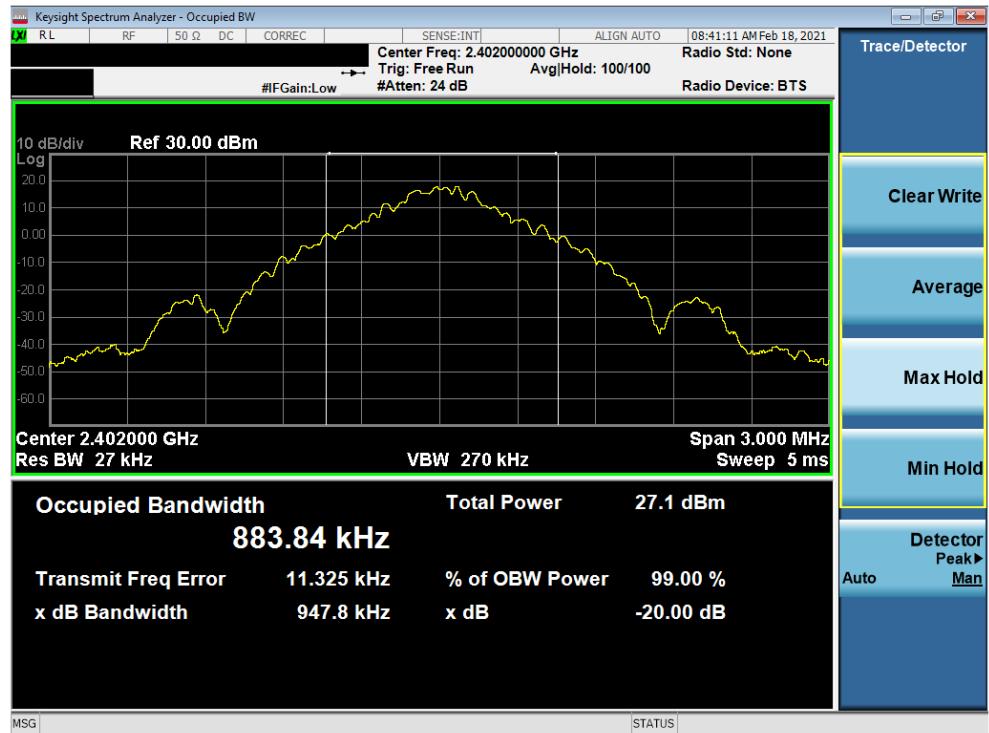


Plot 7-1. 20dB BW and 99% OBW Plot Antenna 8 (Bluetooth, GFSK, ePA – Ch. 0)

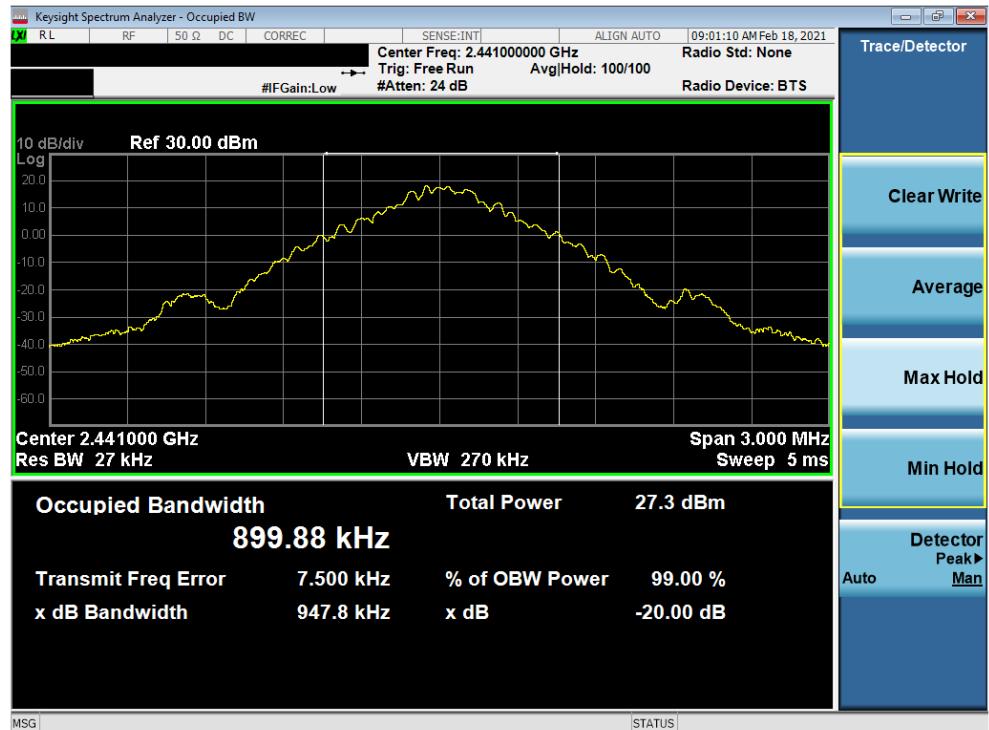


Plot 7-2. 20dB BW and 99% OBW Plot Antenna 8 (Bluetooth, GFSK, ePA – Ch. 39)


FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 17 of 91

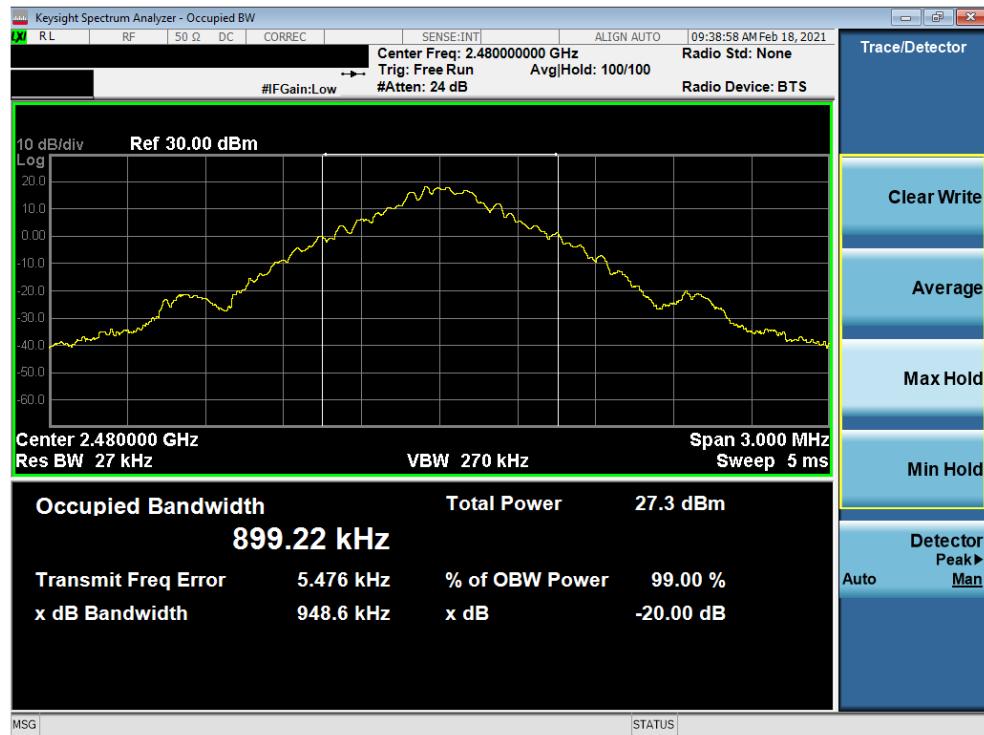


Plot 7-3. 20dB BW and 99% OBW Plot Antenna 8 (Bluetooth, GFSK, ePA – Ch. 78)

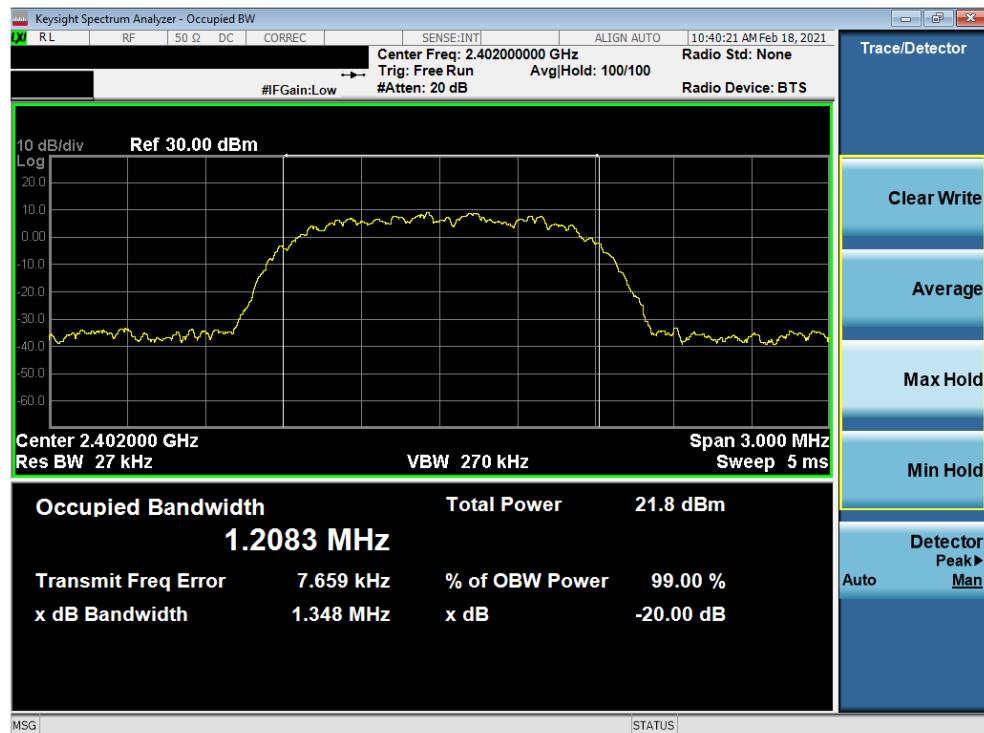


Plot 7-4. 20dB BW and 99% OBW Plot Antenna 8 (Bluetooth, 8DPSK, ePA – Ch. 0)

FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 18 of 91

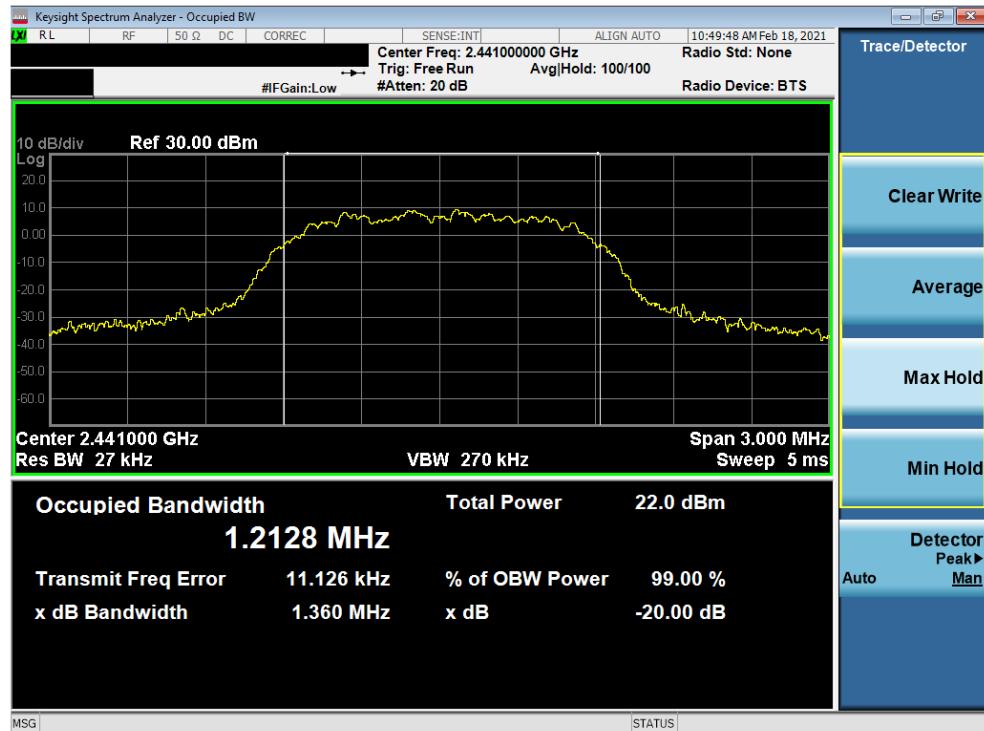

Plot 7-5. 20dB BW and 99% OBW Plot Antenna 8 (Bluetooth, 8DPSK, ePA – Ch. 39)

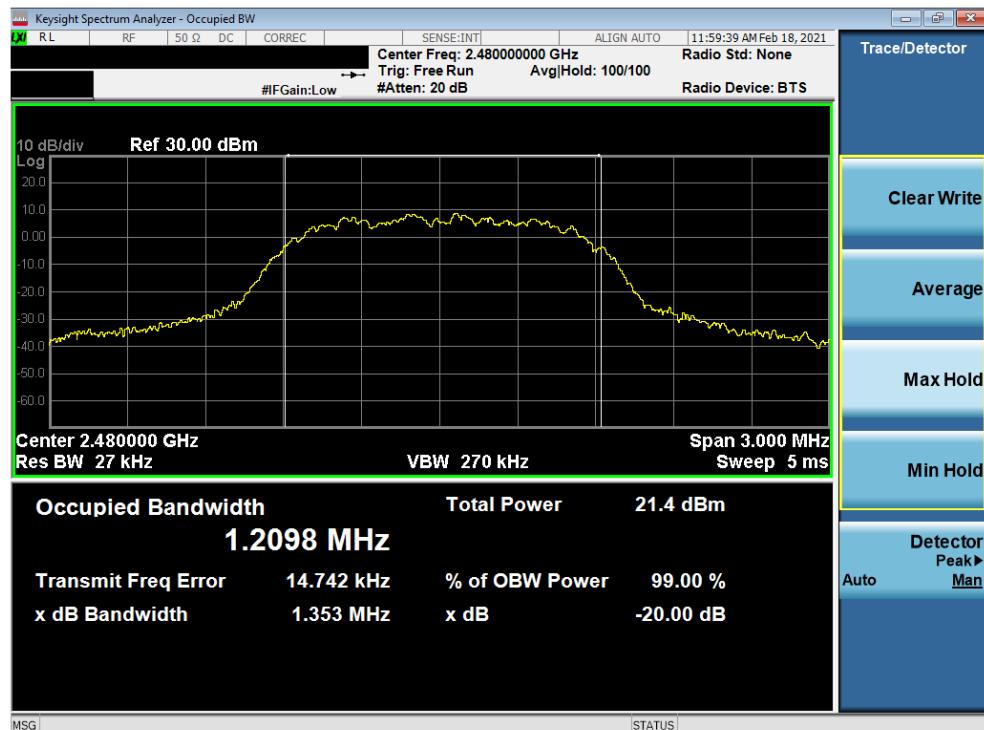

Plot 7-6. 20dB BW and 99% OBW Plot Antenna 8 (Bluetooth, 8DPSK, ePA – Ch. 78)


FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 19 of 91

## Antenna 7


Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	99% OBW Test Results [kHz]	20dB Bandwidth Test Results [kHz]
2402	1.0	GFSK	ePA	0	883.11	948.20
2441	1.0	GFSK	ePA	39	879.29	938.60
2480	1.0	GFSK	ePA	78	881.97	941.90
2402	3.0	8DPSK	ePA	0	1208.00	1348.00
2441	3.0	8DPSK	ePA	39	1208.40	1348.00
2480	3.0	8DPSK	ePA	78	1206.30	1346.00

Table 7-3. 20dB BW and 99% OBW Bandwidth Measurements Antenna 7

FCC ID: BCGA2378 IC: 579C-A2378	 <b>PCTEST</b> Proud to be part of element			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device			

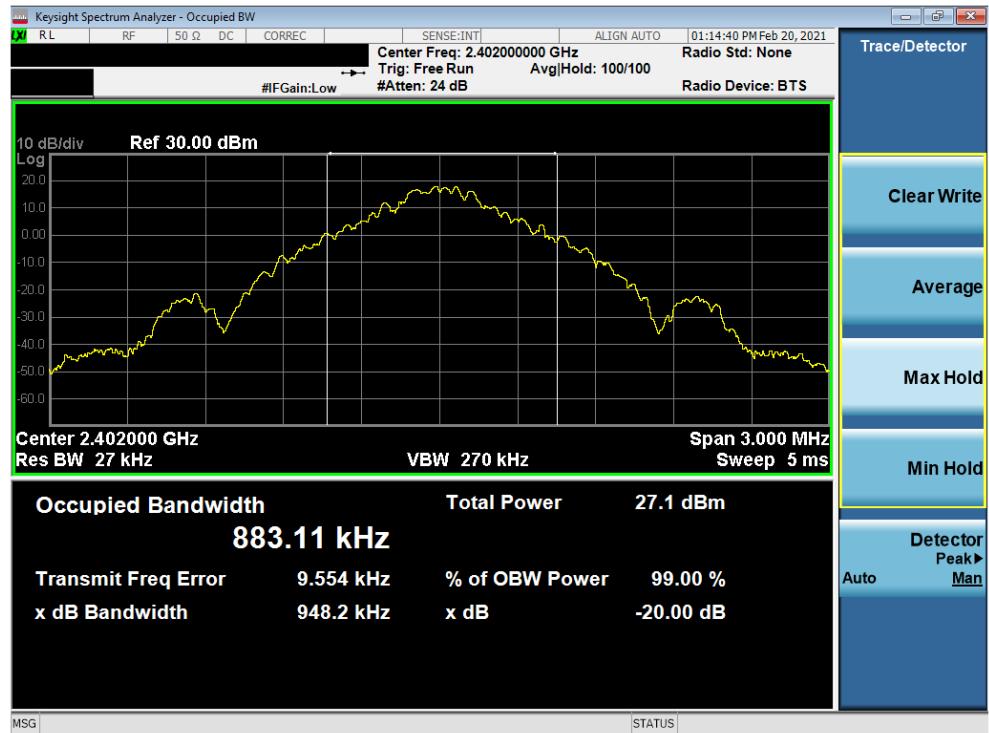


Plot 7-7. 20dB BW and 99% OBW Plot Antenna 7 (Bluetooth, GFSK, ePA – Ch. 0)

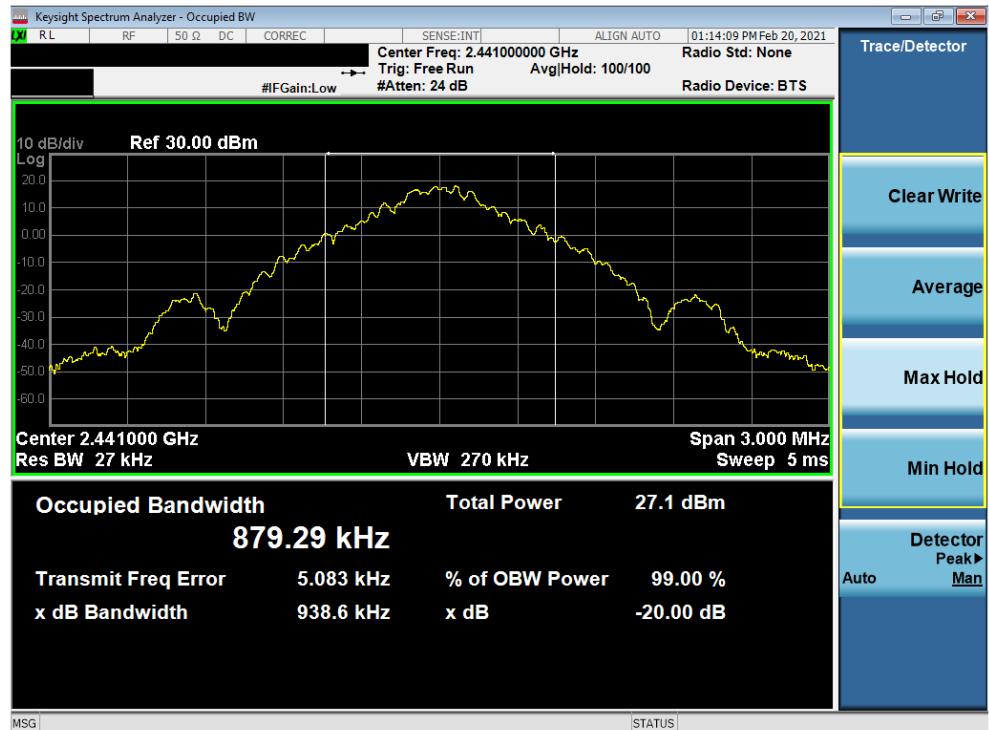


Plot 7-8. 20dB BW and 99% OBW Plot Antenna 7 (Bluetooth, GFSK, ePA – Ch. 39)

FCC ID: BCGA2378 IC: 579C-A2378	 <b>PCTEST</b> <sup>®</sup> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 21 of 91

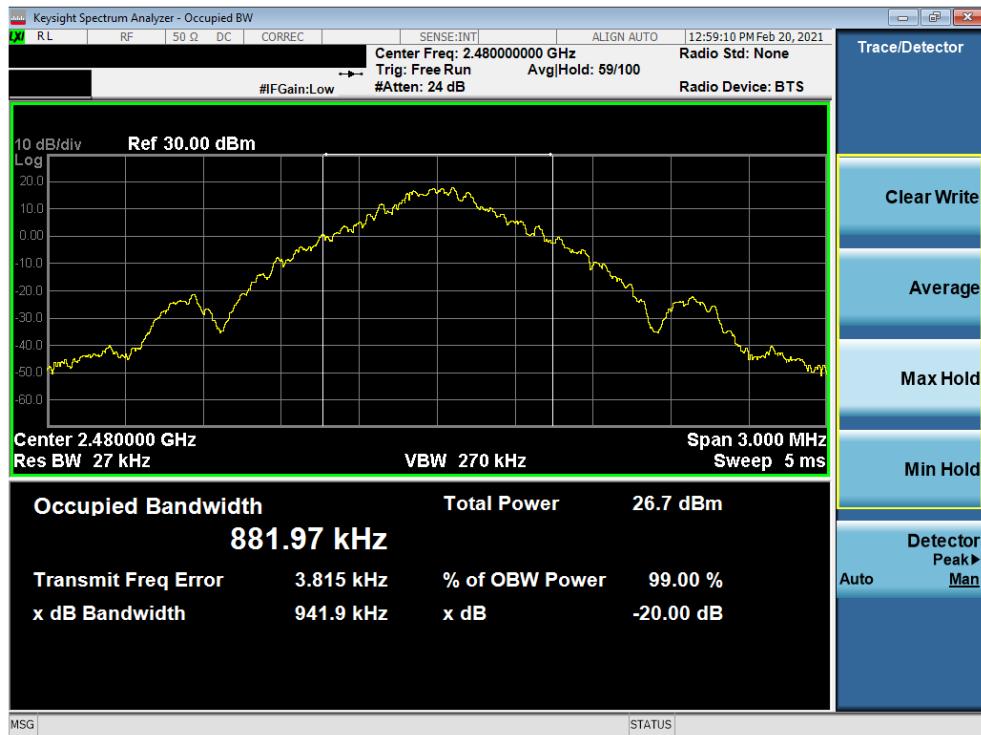


Plot 7-9. 20dB BW and 99% OBW Plot Antenna 7 (Bluetooth, GFSK, ePA – Ch. 78)

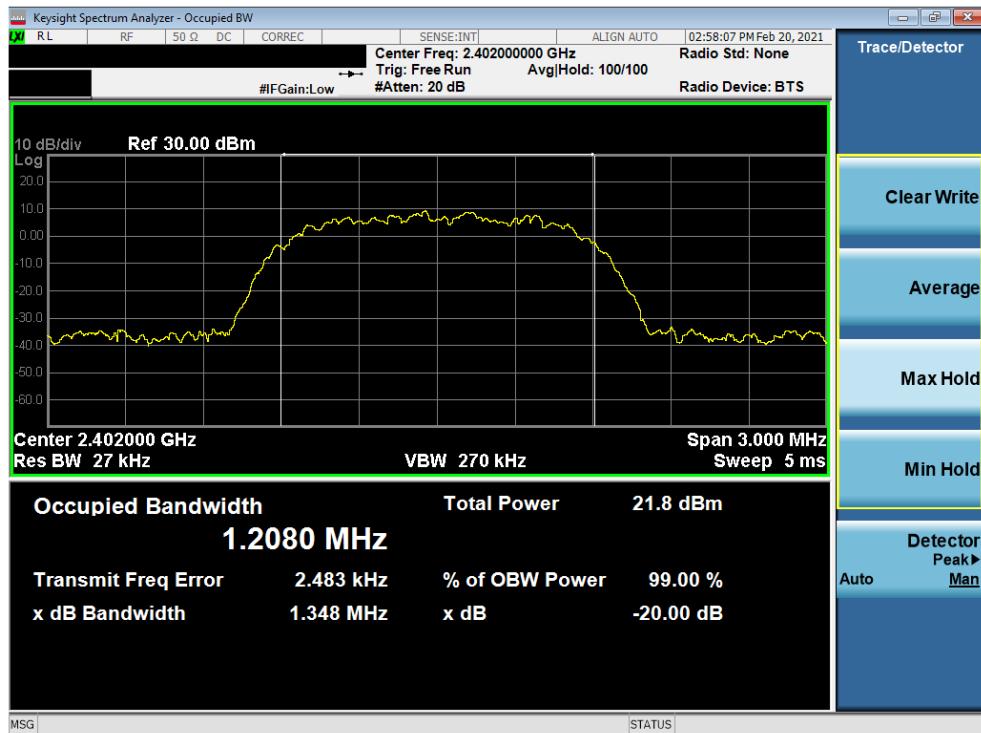


Plot 7-10. 20dB BW and 99% OBW Plot Antenna 7 (Bluetooth, 8DPSK, ePA – Ch. 0)

FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 22 of 91	

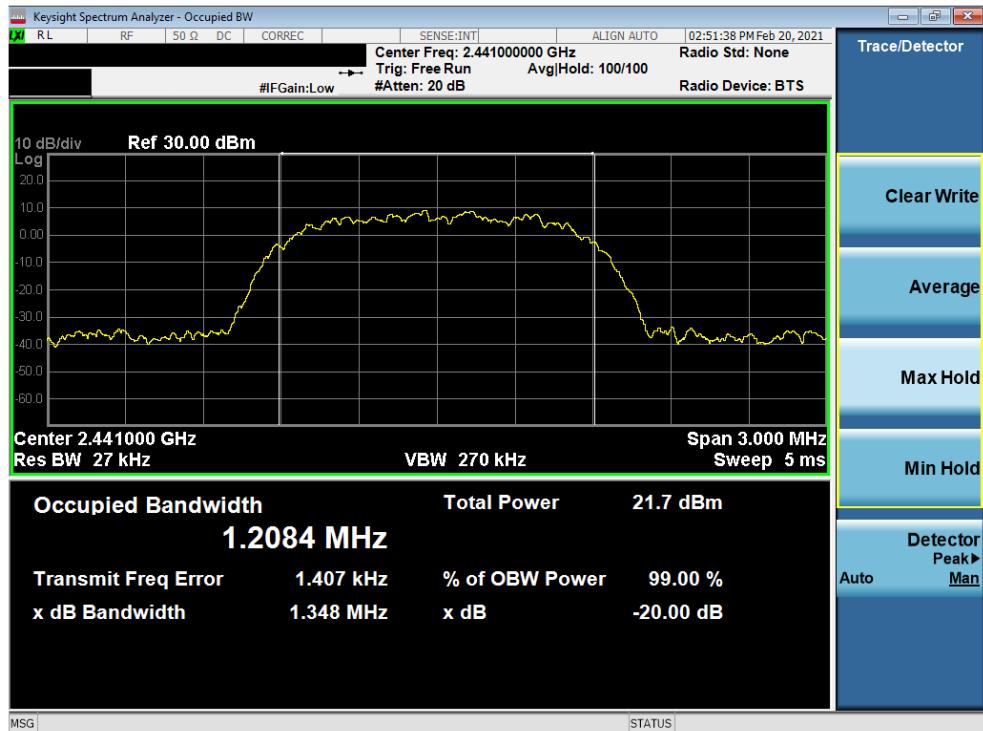

**Plot 7-11. 20dB BW and 99% OBW Plot Antenna 7 (Bluetooth, 8DPSK, ePA – Ch. 39)**

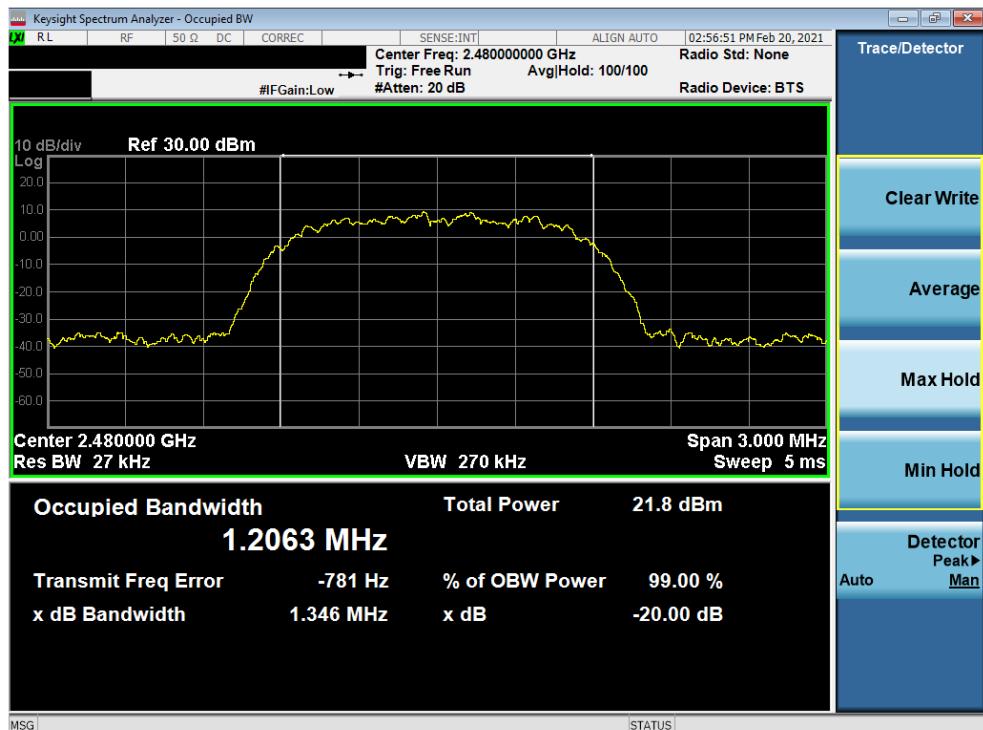

**Plot 7-12. 20dB BW and 99% OBW Plot Antenna 7 (Bluetooth, 8DPSK, ePA – Ch. 78)**

FCC ID: BCGA2378 IC: 579C-A2378	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 23 of 91

## 7.3 Output Power Measurement

§15.247 (b.1); RSS-247 [5.4(b)]

### Test Overview and Limits

Measurement is made while the EUT is operating in non-hopping transmission mode. Peak and Average power measurements are performed using a broadband power meter with a pulse sensor.

***The maximum peak conducted output power of frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels is 1 watt***

***The conducted output power limit on paragraph above is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.***

***For FHSS operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels. The e.i.r.p. shall not exceed 4 W.***

### Test Procedure Used

ANSI C63.10-2013 – Section 7.8.5

ANSI C63.10-2013 – Section 11.9.2.3.2 method AVGPM-G

ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique

### Test Settings

#### Peak Power Measurement

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than the occupied bandwidth.

#### Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-2. Test Instrument & Measurement Setup for Peak and Average Power Measurement**

### Note

All supported modulations have been tested and  $\pi/4$ -DQPSK was found not as the worst case modulation so only GFSK and 8DPSK is reported.

FCC ID: BCGA2378 IC: 579C-A2378	 <b>PCTEST®</b> Proud to be part of  MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 24 of 91

### 7.3.1 Peak Output Power Measurement

Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Peak Conducted Power		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
					[dBm]	[mW]						
2402	1.0	GFSK	ePA	0	16.42	43.853	30.00	-13.58	3.00	19.42	36.02	-16.60
2441	1.0	GFSK	ePA	39	16.68	46.559	30.00	-13.32	3.00	19.68	36.02	-16.34
2480	1.0	GFSK	ePA	78	16.63	46.026	30.00	-13.37	3.00	19.63	36.02	-16.39
2402	1.0	GFSK	iPA	0	12.82	19.143	30.00	-17.18	3.00	15.82	36.02	-20.20
2441	1.0	GFSK	iPA	39	12.59	18.155	30.00	-17.41	3.00	15.59	36.02	-20.43
2480	1.0	GFSK	iPA	78	12.66	18.450	30.00	-17.34	3.00	15.66	36.02	-20.36
2402	3.0	8DPSK	ePA	0	17.34	54.200	30.00	-12.66	3.00	20.34	36.02	-15.68
2441	3.0	8DPSK	ePA	39	16.92	49.204	30.00	-13.08	3.00	19.92	36.02	-16.10
2480	3.0	8DPSK	ePA	78	17.41	55.081	30.00	-12.59	3.00	20.41	36.02	-15.61
2402	3.0	8DPSK	iPA	0	11.84	15.276	30.00	-18.16	3.00	14.84	36.02	-21.18
2441	3.0	8DPSK	iPA	39	11.58	14.388	30.00	-18.42	3.00	14.58	36.02	-21.44
2480	3.0	8DPSK	iPA	78	11.60	14.454	30.00	-18.40	3.00	14.60	36.02	-21.42

Table 7-4. Peak Conducted Output Power Measurements Antenna 8

Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Peak Conducted Power		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
					[dBm]	[mW]						
2402	1.0	GFSK	ePA	0	16.68	46.559	30.00	-13.32	3.50	20.18	36.02	-15.84
2441	1.0	GFSK	ePA	39	16.61	45.814	30.00	-13.39	3.50	20.11	36.02	-15.91
2480	1.0	GFSK	ePA	78	16.70	46.774	30.00	-13.30	3.50	20.20	36.02	-15.82
2402	1.0	GFSK	iPA	0	12.82	19.143	30.00	-17.18	3.50	16.32	36.02	-19.70
2441	1.0	GFSK	iPA	39	12.85	19.275	30.00	-17.15	3.50	16.35	36.02	-19.67
2480	1.0	GFSK	iPA	78	12.79	19.011	30.00	-17.21	3.50	16.29	36.02	-19.73
2402	3.0	8DPSK	ePA	0	17.49	56.105	30.00	-12.51	3.50	20.99	36.02	-15.03
2441	3.0	8DPSK	ePA	39	17.31	53.827	30.00	-12.69	3.50	20.81	36.02	-15.21
2480	3.0	8DPSK	ePA	78	17.03	50.466	30.00	-12.97	3.50	20.53	36.02	-15.49
2402	3.0	8DPSK	iPA	0	11.65	14.622	30.00	-18.35	3.50	15.15	36.02	-20.87
2441	3.0	8DPSK	iPA	39	11.78	15.066	30.00	-18.22	3.50	15.28	36.02	-20.74
2480	3.0	8DPSK	iPA	78	11.94	15.631	30.00	-18.06	3.50	15.44	36.02	-20.58

Table 7-5. Peak Conducted Output Power Measurements Antenna 7

Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Peak Conducted Power					Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]					
					Antenna 8		Antenna 7		Summed											
					[dBm]	[mW]	[dBm]	[mW]	[dBm]	[mW]										
2402	1.0	GFSK	ePA	0	14.49	28.119	14.16	26.062	17.34	54.200	29.74	-12.40	6.26	23.60	36.02	-12.42				
2441	1.0	GFSK	ePA	39	13.83	24.155	14.51	28.249	17.19	52.360	29.74	-12.55	6.26	23.45	36.02	-12.57				
2480	1.0	GFSK	ePA	78	14.08	25.586	14.72	29.648	17.42	55.208	29.74	-12.32	6.26	23.68	36.02	-12.34				
2402	1.0	GFSK	iPA	0	12.97	19.815	12.63	18.323	15.81	38.107	29.74	-13.93	6.26	22.07	36.02	-13.95				
2441	1.0	GFSK	iPA	39	12.57	18.072	13.12	20.512	15.86	38.548	29.74	-13.88	6.26	22.12	36.02	-13.90				
2480	1.0	GFSK	iPA	78	12.62	18.281	12.82	19.143	15.73	37.411	29.74	-14.01	6.26	21.99	36.02	-14.03				
2402	3.0	8DPSK	ePA	0	12.47	17.660	12.22	16.672	15.36	34.356	29.74	-14.38	6.26	21.62	36.02	-14.40				
2441	3.0	8DPSK	ePA	39	11.98	15.776	12.20	16.596	15.10	32.359	29.74	-14.64	6.26	21.36	36.02	-14.66				
2480	3.0	8DPSK	ePA	78	11.95	15.668	12.19	16.558	15.08	32.211	29.74	-14.66	6.26	21.34	36.02	-14.68				
2402	3.0	8DPSK	iPA	0	8.91	7.780	8.82	7.621	11.88	15.417	29.74	-17.86	6.26	18.14	36.02	-17.88				
2441	3.0	8DPSK	iPA	39	8.79	7.568	8.86	7.691	11.84	15.276	29.74	-17.90	6.26	18.10	36.02	-17.92				
2480	3.0	8DPSK	iPA	78	8.74	7.482	9.22	8.356	12.00	15.849	29.74	-17.74	6.26	18.26	36.02	-17.76				

Table 7-6. Peak Conducted Output Power Measurements TxBF

FCC ID: BCGA2378	 <b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)								Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device								Page 25 of 91

### 7.3.2 Average Output Power Measurement

Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Avg Conducted Power		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
					[dBm]	[mW]						
2402	1.0	GFSK	ePA	0	16.11	40.832	30.00	-13.89	3.00	19.11	36.02	-16.91
2441	1.0	GFSK	ePA	39	16.36	43.251	30.00	-13.64	3.00	19.36	36.02	-16.66
2480	1.0	GFSK	ePA	78	16.28	42.462	30.00	-13.72	3.00	19.28	36.02	-16.74
2402	1.0	GFSK	iPA	0	12.19	16.558	30.00	-17.81	3.00	15.19	36.02	-20.83
2441	1.0	GFSK	iPA	39	12.21	16.634	30.00	-17.79	3.00	15.21	36.02	-20.81
2480	1.0	GFSK	iPA	78	12.34	17.140	30.00	-17.66	3.00	15.34	36.02	-20.68
2402	3.0	8DPSK	ePA	0	13.97	24.946	30.00	-16.03	3.00	16.97	36.02	-19.05
2441	3.0	8DPSK	ePA	39	13.56	22.699	30.00	-16.44	3.00	16.56	36.02	-19.46
2480	3.0	8DPSK	ePA	78	14.00	25.119	30.00	-16.00	3.00	17.00	36.02	-19.02
2402	3.0	8DPSK	iPA	0	8.99	7.925	30.00	-21.01	3.00	11.99	36.02	-24.03
2441	3.0	8DPSK	iPA	39	8.71	7.430	30.00	-21.29	3.00	11.71	36.02	-24.31
2480	3.0	8DPSK	iPA	78	8.79	7.568	30.00	-21.21	3.00	11.79	36.02	-24.23

Table 7-7. Average Conducted Output Power Measurements Antenna 8

Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Avg Conducted Power		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
					[dBm]	[mW]						
2402	1.0	GFSK	ePA	0	16.32	42.855	30.00	-13.68	3.50	19.82	36.02	-16.20
2441	1.0	GFSK	ePA	39	16.26	42.267	30.00	-13.74	3.50	19.76	36.02	-16.26
2480	1.0	GFSK	ePA	78	16.34	43.053	30.00	-13.66	3.50	19.84	36.02	-16.18
2402	1.0	GFSK	iPA	0	12.46	17.620	30.00	-17.54	3.50	15.96	36.02	-20.06
2441	1.0	GFSK	iPA	39	12.48	17.701	30.00	-17.52	3.50	15.98	36.02	-20.04
2480	1.0	GFSK	iPA	78	12.40	17.378	30.00	-17.60	3.50	15.90	36.02	-20.12
2402	3.0	8DPSK	ePA	0	14.00	25.119	30.00	-16.00	3.50	17.50	36.02	-18.52
2441	3.0	8DPSK	ePA	39	13.92	24.660	30.00	-16.08	3.50	17.42	36.02	-18.60
2480	3.0	8DPSK	ePA	78	13.65	23.174	30.00	-16.35	3.50	17.15	36.02	-18.87
2402	3.0	8DPSK	iPA	0	8.64	7.311	30.00	-21.36	3.50	12.14	36.02	-23.88
2441	3.0	8DPSK	iPA	39	8.81	7.603	30.00	-21.19	3.50	12.31	36.02	-23.71
2480	3.0	8DPSK	iPA	78	8.99	7.925	30.00	-21.01	3.50	12.49	36.02	-23.53

Table 7-8. Average Conducted Output Power Measurements Antenna 7

Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Average Conducted Power					Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]					
					Antenna 8		Antenna 7		Summed											
					[dBm]	[mW]	[dBm]	[mW]	[dBm]	[mW]										
2402	1.0	GFSK	ePA	0	14.00	25.119	13.77	43.823	16.90	48.978	29.74	-12.84	6.26	23.16	36.02	-12.86				
2441	1.0	GFSK	ePA	39	13.53	22.542	14.00	25.119	16.78	47.643	29.74	-12.96	6.26	23.04	36.02	-12.98				
2480	1.0	GFSK	ePA	78	13.76	23.768	14.00	25.119	16.89	48.865	29.74	-12.85	6.26	23.15	36.02	-12.87				
2402	1.0	GFSK	iPA	0	12.50	17.783	12.32	17.061	15.42	34.834	29.74	-14.32	6.26	21.68	36.02	-14.34				
2441	1.0	GFSK	iPA	39	12.21	16.634	12.50	17.783	15.37	34.435	29.74	-14.37	6.26	21.63	36.02	-14.39				
2480	1.0	GFSK	iPA	78	12.29	16.943	12.44	17.539	15.38	34.514	29.74	-14.36	6.26	21.64	36.02	-14.38				
2402	3.0	8DPSK	ePA	0	12.00	15.849	11.86	15.346	14.94	31.189	29.74	-14.80	6.26	21.20	36.02	-14.82				
2441	3.0	8DPSK	ePA	39	11.63	14.555	11.83	15.241	14.74	29.785	29.74	-15.00	6.26	21.00	36.02	-15.02				
2480	3.0	8DPSK	ePA	78	11.57	14.355	11.81	15.171	14.70	29.512	29.74	-15.04	6.26	20.96	36.02	-15.06				
2402	3.0	8DPSK	iPA	0	8.66	7.345	8.57	7.194	11.63	14.555	29.74	-18.11	6.26	17.89	36.02	-18.13				
2441	3.0	8DPSK	iPA	39	8.55	7.161	8.64	7.311	11.61	14.488	29.74	-18.13	6.26	17.87	36.02	-18.15				
2480	3.0	8DPSK	iPA	78	8.51	7.096	8.96	7.870	11.75	14.962	29.74	-17.99	6.26	18.01	36.02	-18.01				

Table 7-9. Average Conducted Output Power Measurements TxBF

FCC ID: BCGA2378	 <b>PCTEST<sup>®</sup></b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 26 of 91

**Note:**

Per ANSI C63.10-2013 and KDB 662911 D01 v02r01 Section E)1), the conducted powers at Antenna 8 and Antenna 7 were first measured separately during TxBF transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where  $G_N$  is the gain of the nth antenna and  $N_{ANT}$ , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_{N/20}})^2 / N_{ANT}] \text{ dBi}$$

**Sample TxBF Calculation:**

At 2404MHz the average conducted output power was measured to be 14.00 dBm for Antenna 8 and 13.77 dBm for Antenna 7.

$$\text{Antenna 8} + \text{Antenna 7} = \text{TxBF}$$

$$(14.00 \text{ dBm} + 25.119 \text{ dBm}) = (13.77 \text{ mW} + 23.823 \text{ mW}) = 48.978 \text{ mW} = 16.90 \text{ dBm}$$

**Sample e.i.r.p. Calculation:**

At 2402MHz, the average conducted output power was calculated to be 16.90 dBm with directional gain of 6.26 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$16.90 \text{ dBm} + 6.26 \text{ dBi} = 23.16 \text{ dBm}$$

FCC ID: BCGA2378 IC: 579C-A2378	 <b>PCTEST<sup>®</sup></b> Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 27 of 91	

## 7.4 Conducted Authorized Band Edge

§15.247 (d); RSS-247 [5.5]

### Test Overview and Limits

EUT operates in hopping and non-hopping transmission mode. Measurement is taken at the highest point located outside of the emission bandwidth. ***The maximum permissible out-of-band emission level is 20 dBc.***

### Test Procedure Used

ANSI C63.10-2013 – Section 6.10.4

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 300kHz
5. Detector = Peak
6. Number of sweep points  $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 7-3. Test Instrument & Measurement Setup**

### Test Notes


1. Out of band conducted spurious emissions at the band edge were investigated for all data rates in hopping and non-hopping modes. The worst case emissions were found with the EUT transmitting at 3 Mbps. Band edge emissions were also investigated with the EUT transmitting in all data rates. Plots of the worst case emissions are shown below.
2. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.

FCC ID: BCGA2378 IC: 579C-A2378	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 28 of 91

## Antenna 8

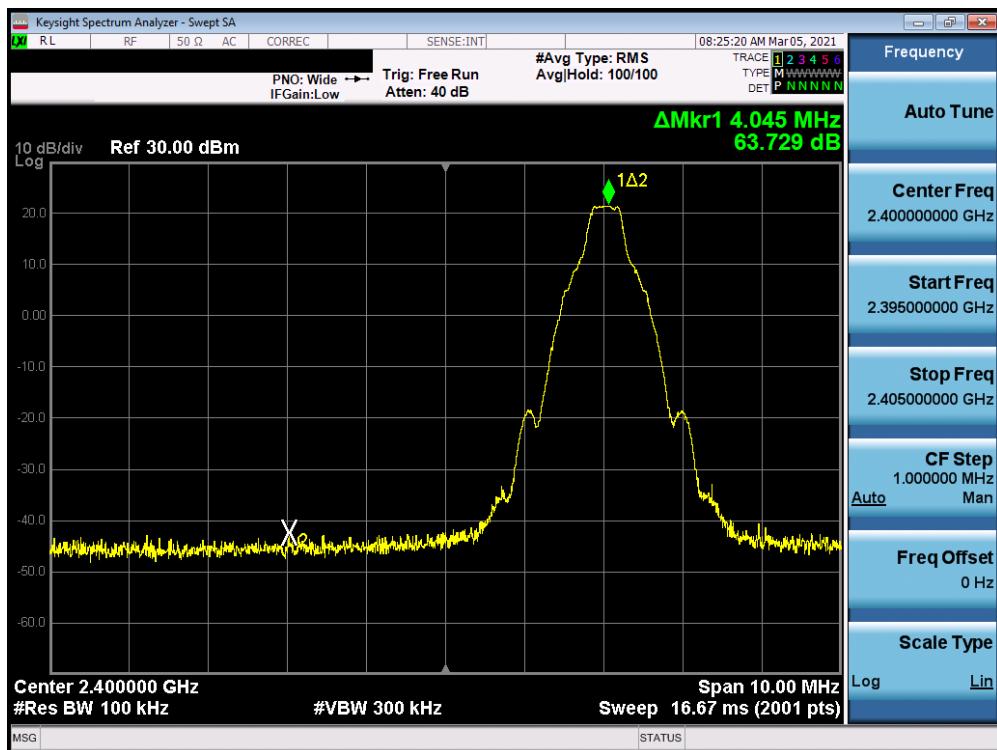


### Plot 7-13. Band Edge Plot Antenna 8 (Bluetooth with Hopping Disabled, GFSK, ePA – Ch. 0)

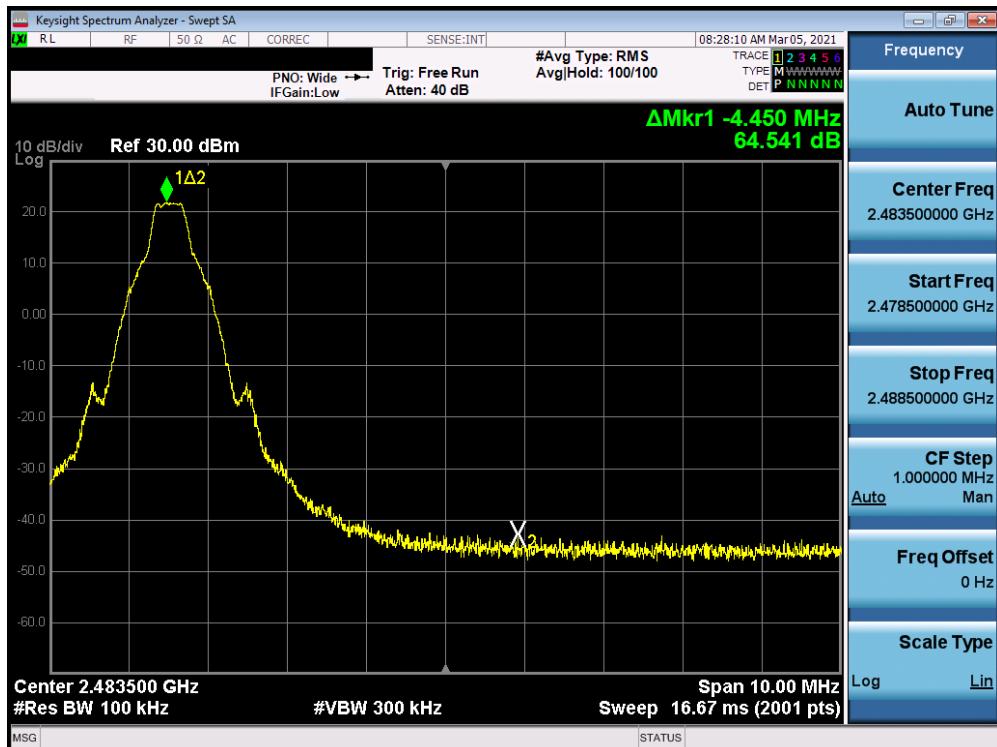


Plot 7-14. Band Edge Plot Antenna 8 (Bluetooth with Hopping Disabled, GFSK, ePA – Ch. 78)

FCC ID: BCGA2378 IC: 579C-A2378	 Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	<b>Test Dates:</b> 12/15/2020-2/25/2021	<b>EUT Type:</b> Tablet Device	Page 29 of 91

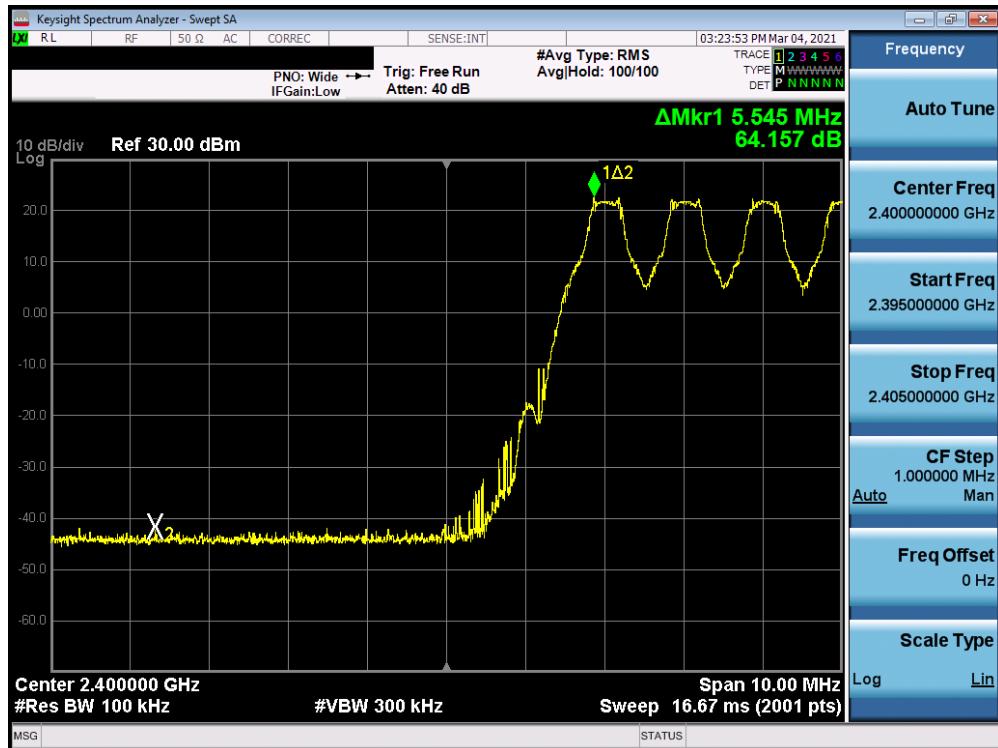


Plot 7-15. Band Edge Plot Antenna 8 (Bluetooth with Hopping Enabled, GFSK, ePA)

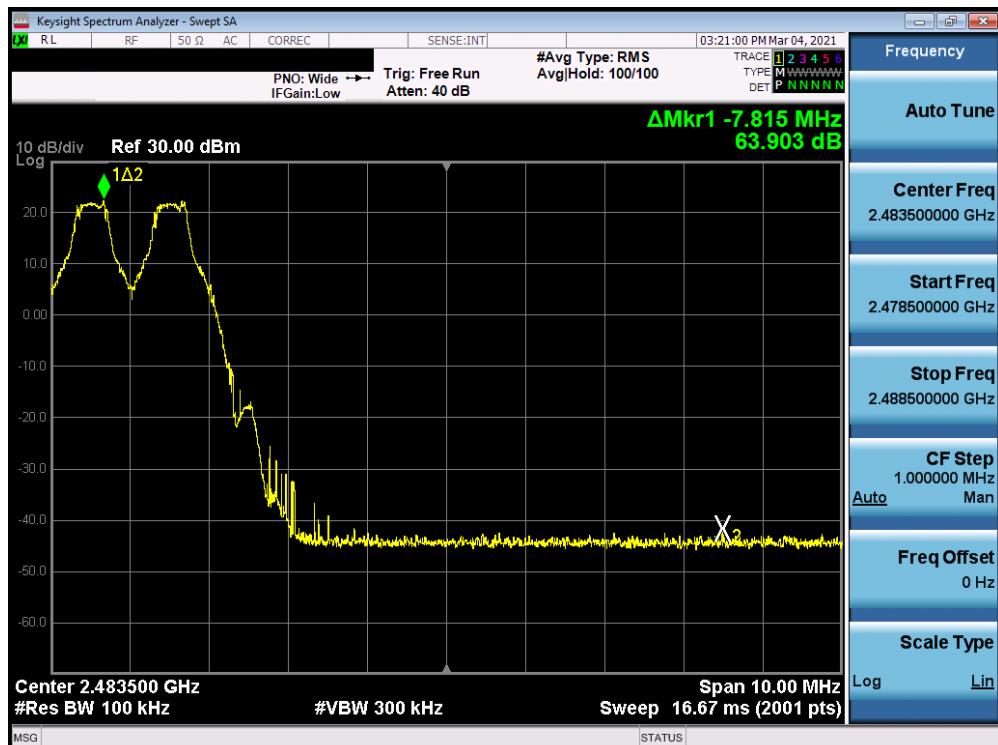

Plot 7-16. Band Edge Plot Antenna 8 (Bluetooth with Hopping Enabled, GFSK, ePA)

FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 30 of 91

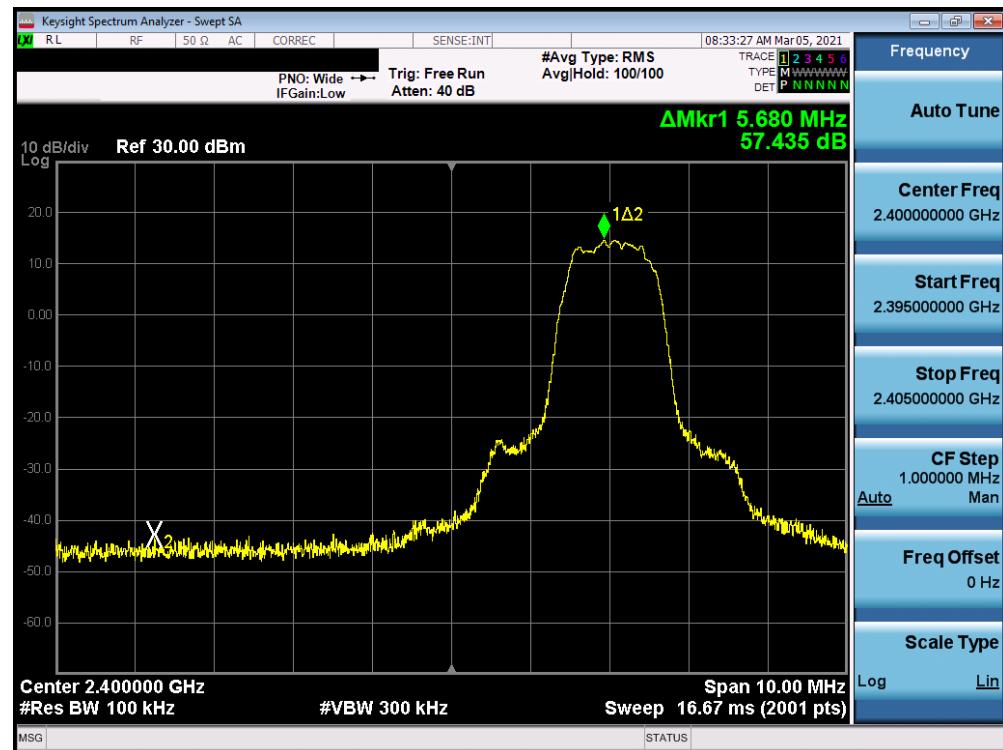


Plot 7-17. Band Edge Plot Antenna 8 (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch. 0)




Plot 7-18. Band Edge Plot Antenna 8 (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch. 78)


FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 31 of 91

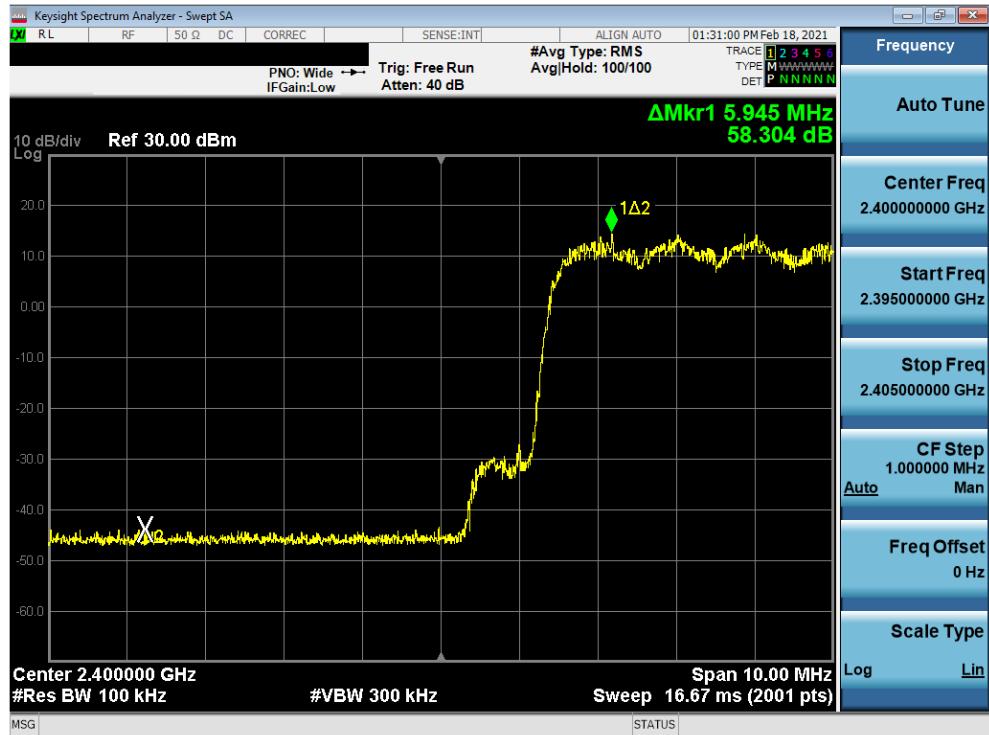


Plot 7-19. Band Edge Plot Antenna 8 (Bluetooth with Hopping Enabled, 8DPSK, ePA)

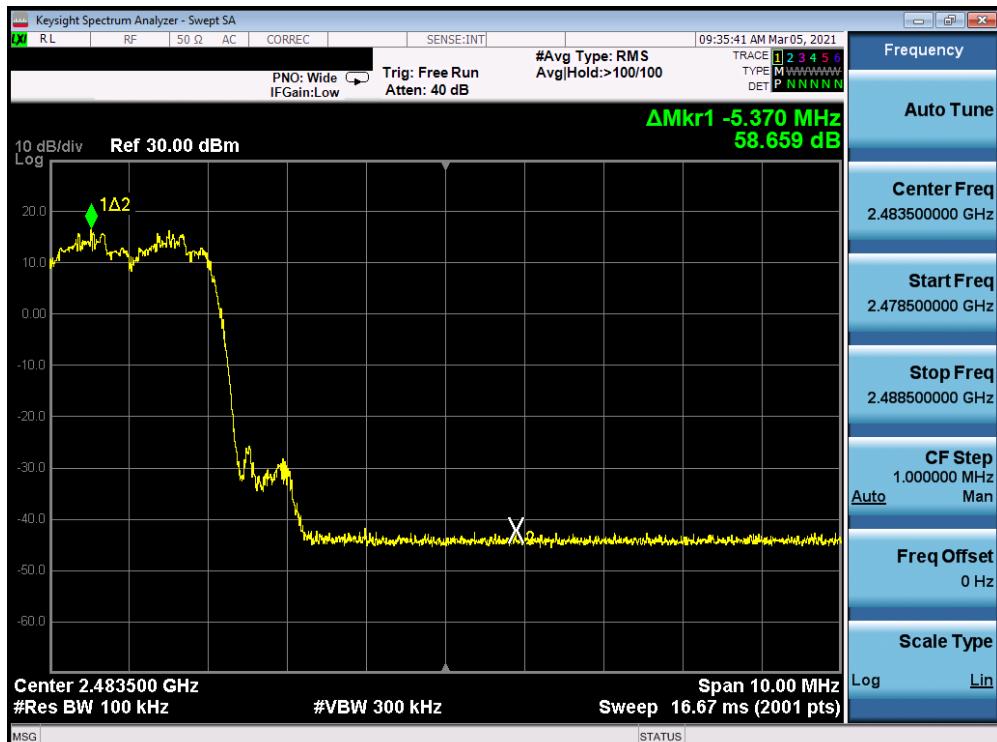


Plot 7-20. Band Edge Plot Antenna 8 (Bluetooth with Hopping Enabled, 8DPSK, ePA)

FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 32 of 91

## Antenna 7

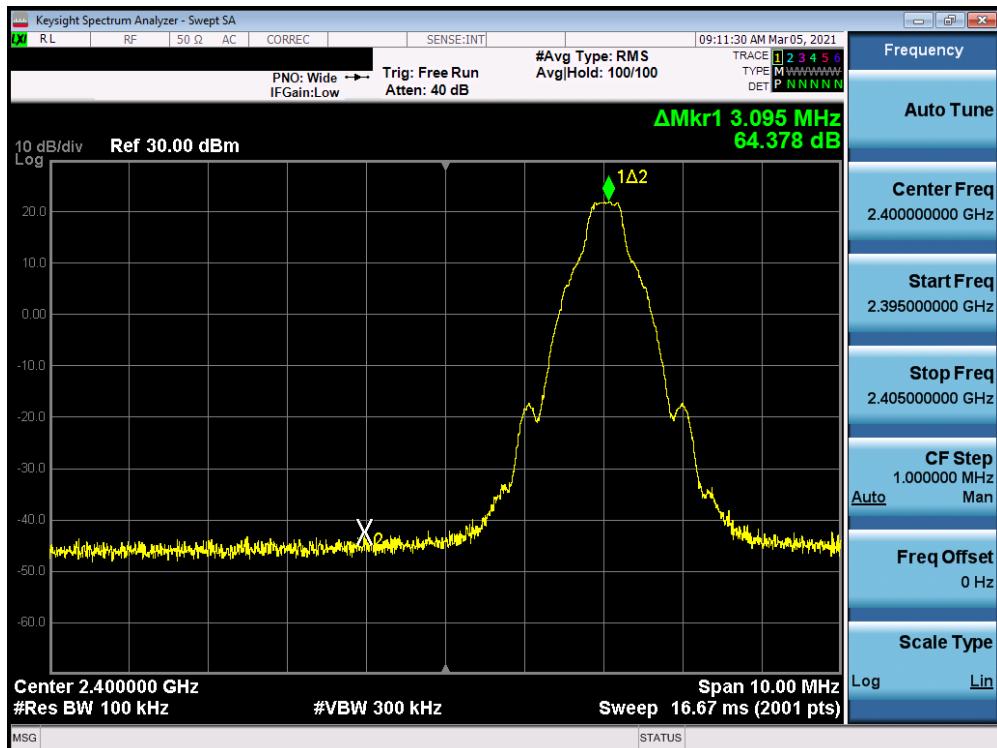


Plot 7-21. Band Edge Plot Antenna 7 (Bluetooth with Hopping Disabled, GFSK, ePA – Ch. 0)

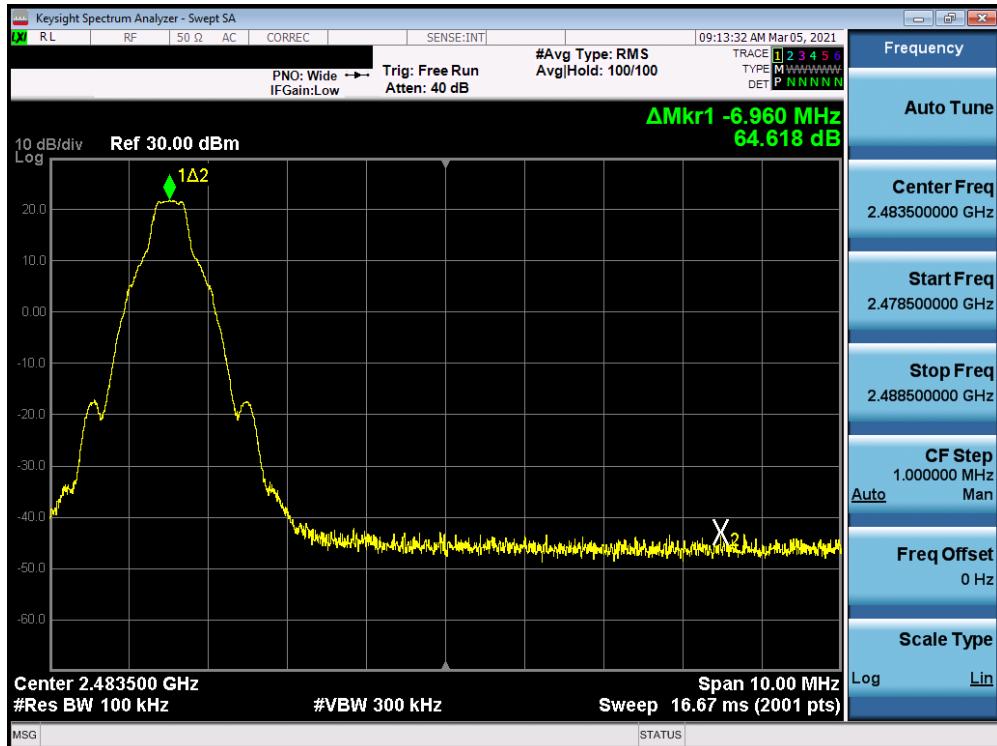


Plot 7-22. Band Edge Plot Antenna 7 (Bluetooth with Hopping Disabled, GFSK, ePA – Ch. 78)

FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020/2/25/2021	EUT Type: Tablet Device	Page 33 of 91

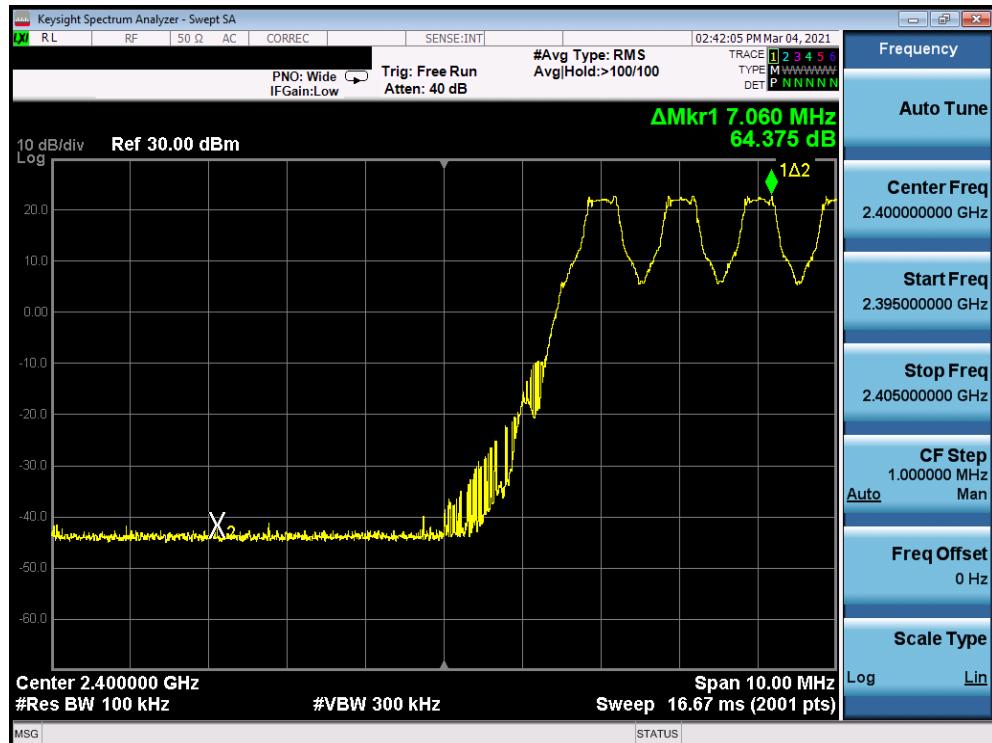


Plot 7-23. Band Edge Plot Antenna 7 (Bluetooth with Hopping Enabled, GFSK, ePA)

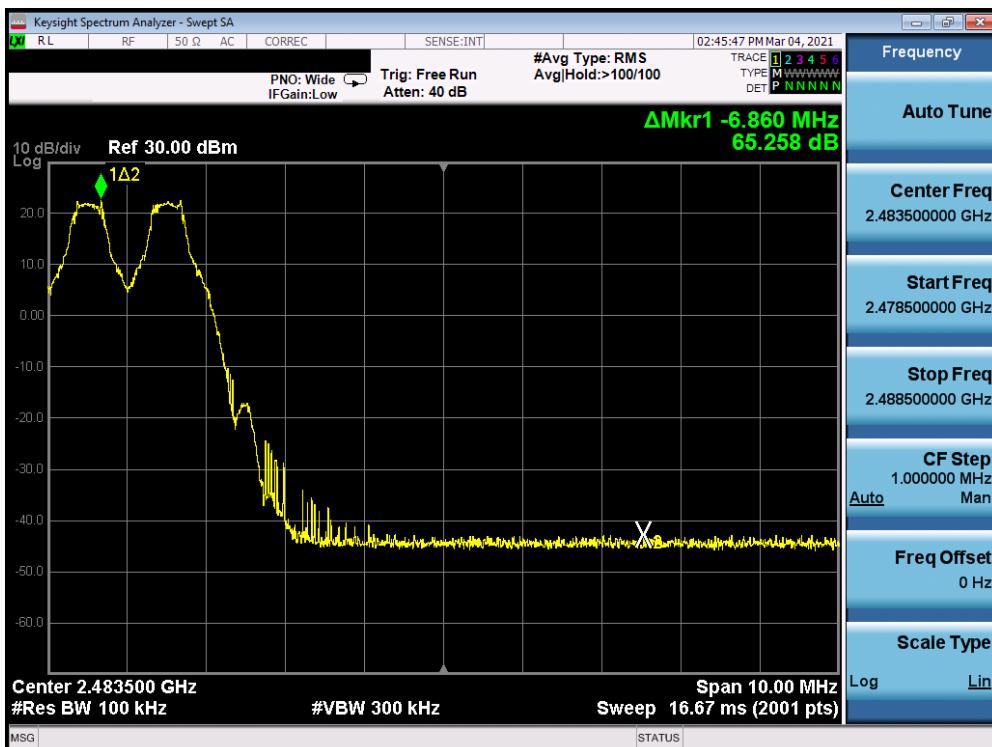


Plot 7-24. Band Edge Plot Antenna 7 (Bluetooth with Hopping Enabled, GFSK, ePA)

FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 34 of 91

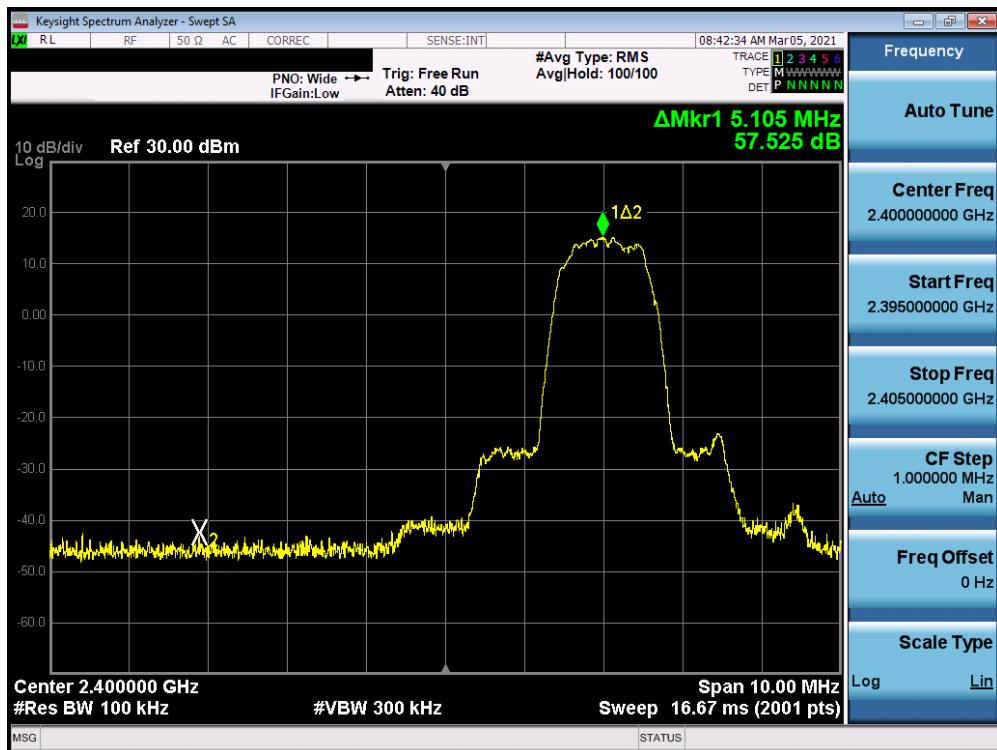


Plot 7-25. Band Edge Plot Antenna 7 (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch. 0)

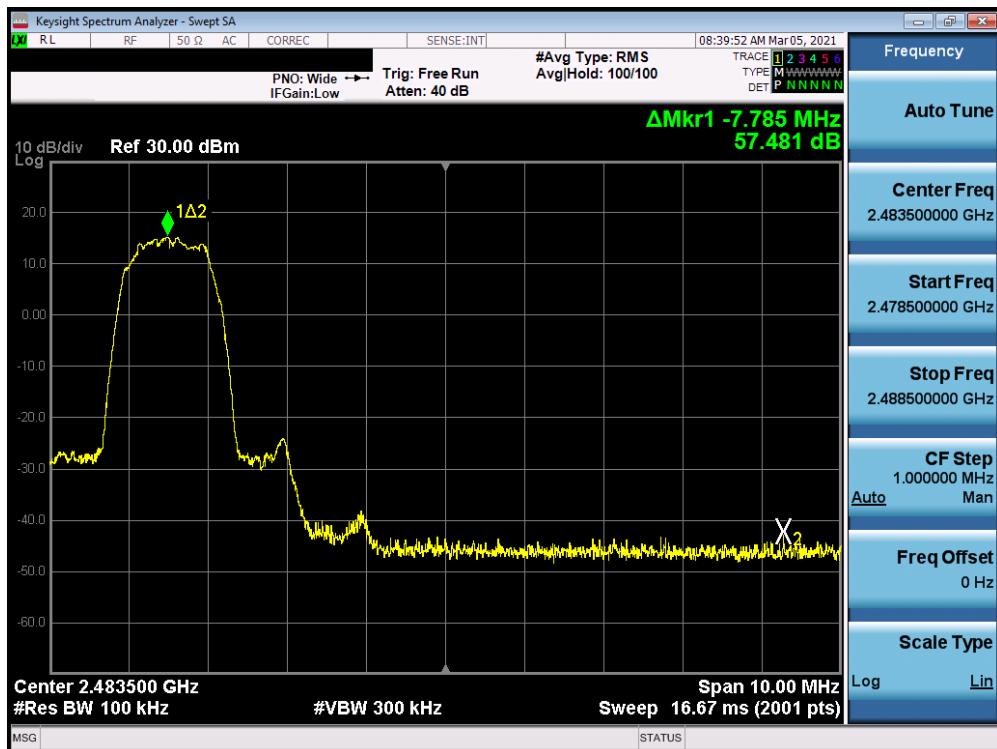


Plot 7-26. Band Edge Plot Antenna 7 (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch. 78)

FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST®</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 35 of 91

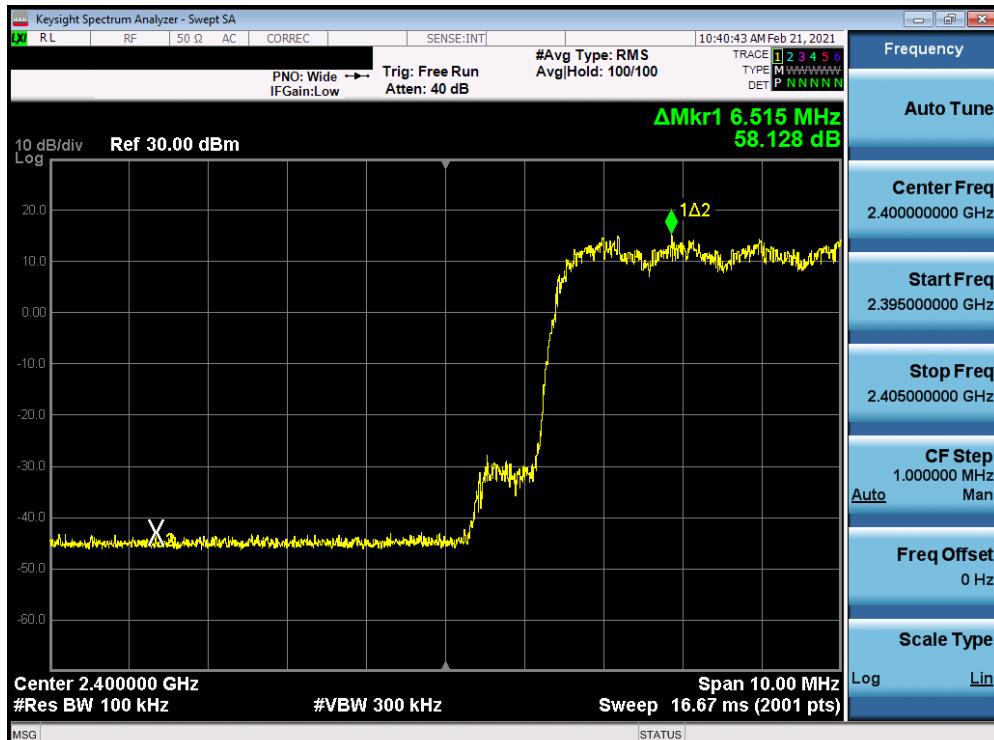

Plot 7-27. Band Edge Plot Antenna 7 (Bluetooth with Hopping Enabled, 8DPSK, ePA)

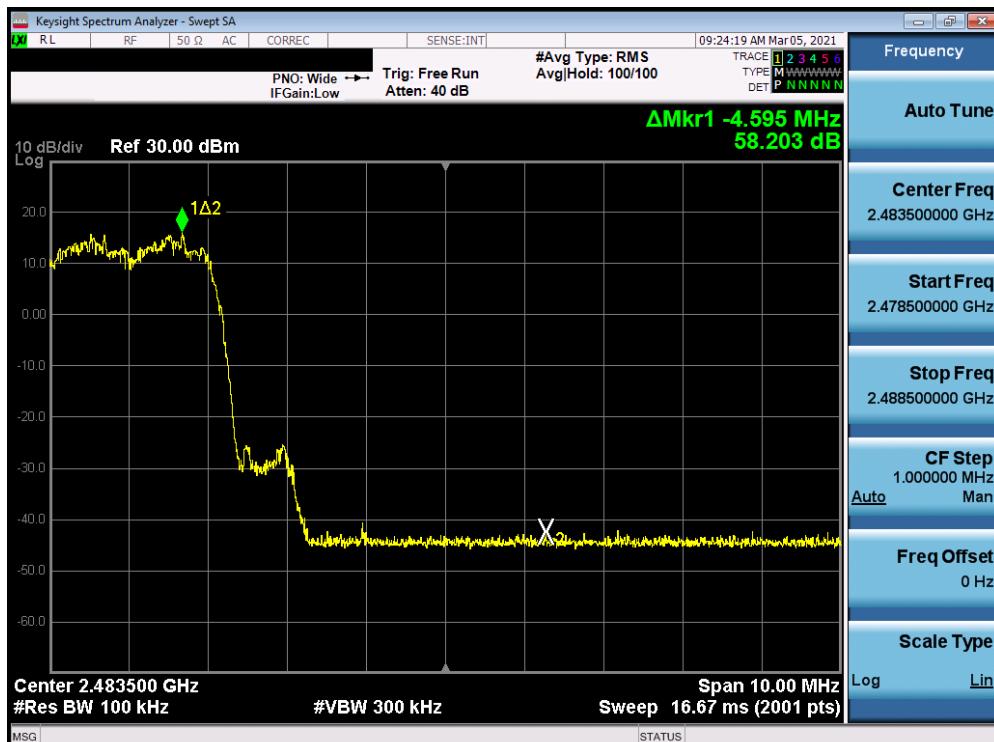

Plot 7-28. Band Edge Plot Antenna 7 (Bluetooth with Hopping Enabled, 8DPSK, ePA)

FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 36 of 91

## 7.5 Carrier Frequency Separation

§15.247 (a.1); RSS-247 [5.1(b)]

### Test Overview and Limit

Measurement is made with EUT operating in hopping mode. ***The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.***

### Test Procedure Used

ANSI C63.10-2013 – Section 7.8.2

### Test Settings

1. Span = Wide enough to capture peaks of two adjacent channels
2. RBW = 30% of channel spacing. Adjust as necessary to best identify center of each individual channel
3. VBW  $\geq$  RBW
4. Sweep = Auto
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize.
8. Marker-delta function used to determine separation between peaks of the adjacent channels

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-4. Test Instrument & Measurement Setup**

### Test Notes

1. The EUT complies with the minimum channel separation requirement when it is operating in 1x/EDR mode using 79 channels.
2. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.


FCC ID: BCGA2378 IC: 579C-A2378	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 37 of 91

## Antenna 8


Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Measured Channel Separation [MHz]	Min. Channel Separation Limit [MHz]	Pass / Fail
2441	1.0	GFSK	ePA	39	1.000	0.635	Pass
2441	3.0	8DPSK	ePA	39	1.000	0.904	Pass

Table 7-10. Minimum Channel Separation Antenna 8

FCC ID: BCGA2378 IC: 579C-A2378	 <b>PCTEST<sup>®</sup></b> Proud to be part of element			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device			

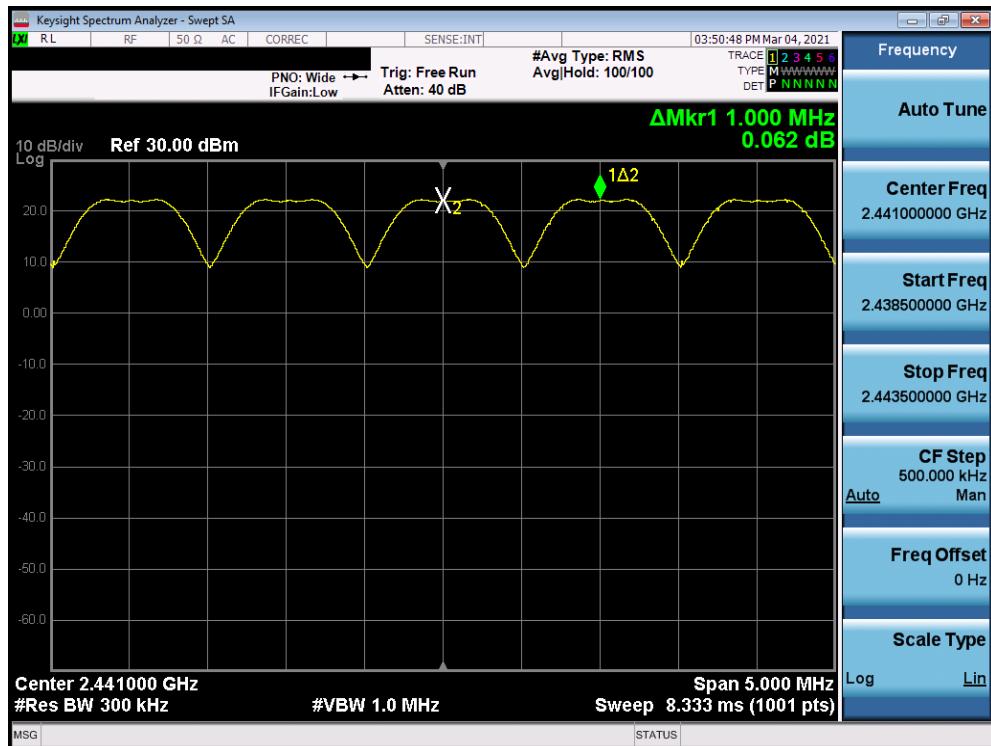

Plot 7-29. Channel Spacing Plot Antenna 8 (Bluetooth, GFSK, ePA)

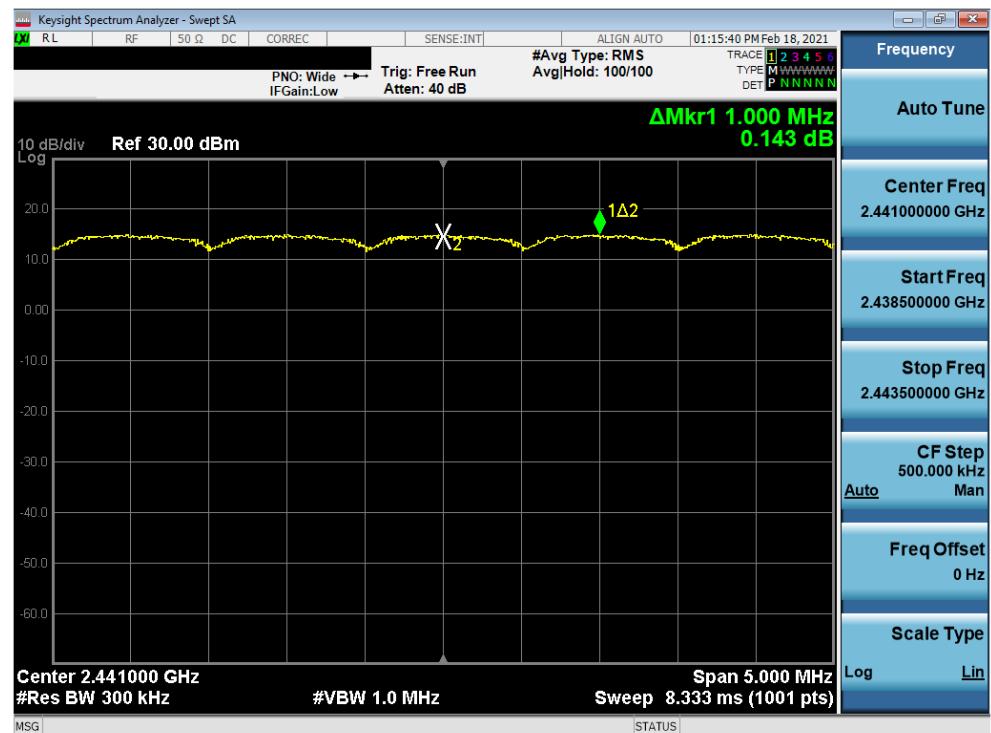

Plot 7-30. Channel Spacing Plot Antenna 8 (Bluetooth, 8DPSK, ePA)


FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 39 of 91

## Antenna 7


Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Measured Channel Separation [MHz]	Min. Channel Separation Limit [MHz]	Pass / Fail
2441	1.0	GFSK	ePA	39	1.000	0.636	Pass
2441	3.0	8DPSK	ePA	39	1.000	0.901	Pass

Table 7-11. Minimum Channel Separation Antenna 7

FCC ID: BCGA2378 IC: 579C-A2378	 <b>PCTEST<sup>®</sup></b> Proud to be part of element			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	<b>Test Dates:</b> 12/15/2020-2/25/2021			<b>EUT Type:</b> Tablet Device	Page 40 of 91

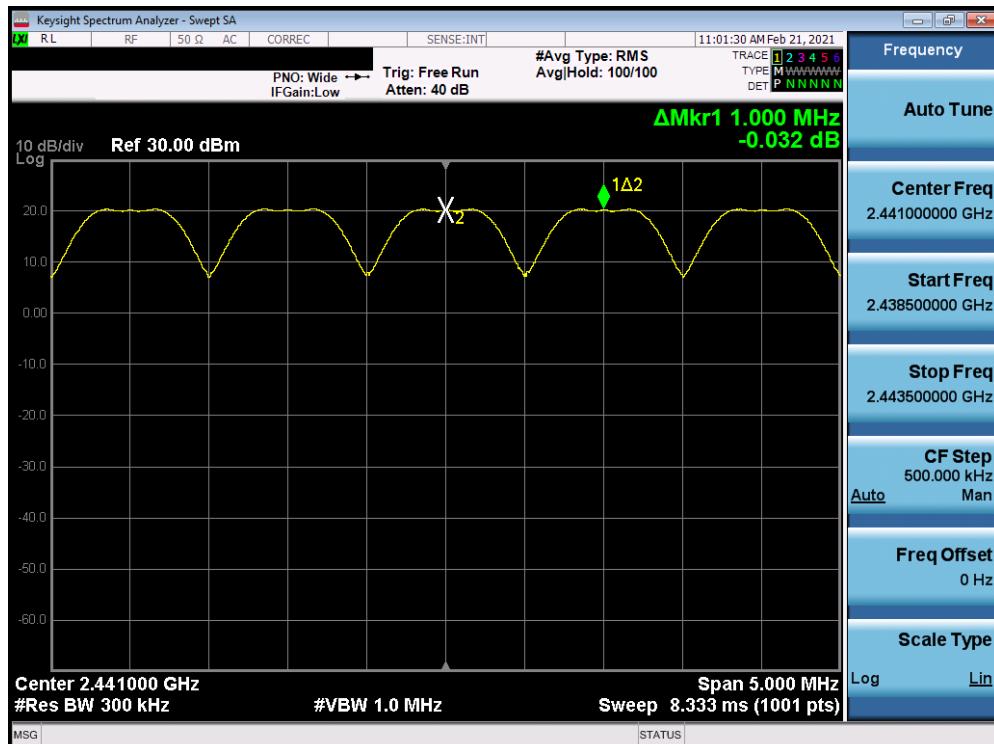

Plot 7-31. Channel Spacing Plot Antenna 7 (Bluetooth, GFSK, ePA)

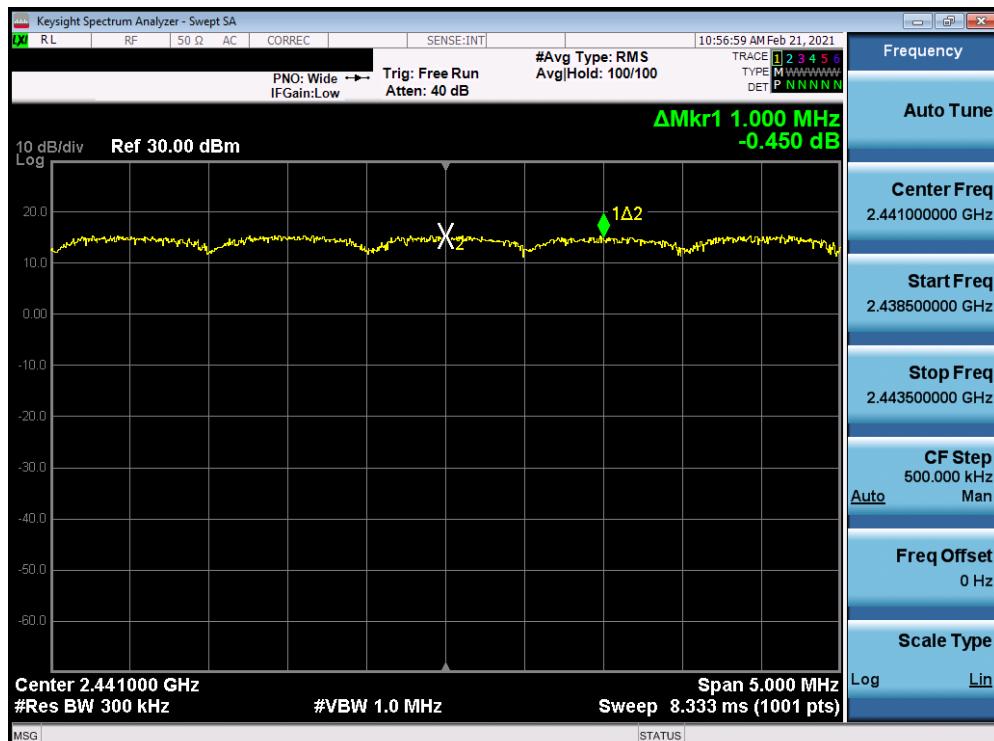

Plot 7-32. Channel Spacing Plot Antenna 7 (Bluetooth, 8DPSK, ePA)

FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 41 of 91

## 7.6 Time of Occupancy

§15.247 (a.1.iii); RSS-247 [5.1(d)]

### Test Overview and Limit

Measurement is made while EUT is operating in hopping mode with the spectrum analyzer set to zero span. ***The maximum permissible time of occupancy is 400 ms within a period of 400ms multiplied by the number of hopping channels employed.***

### Test Procedure Used

ANSI C63.10-2013 – Section 7.8.4

### Test Settings

1. Span = zero span, centered on a hopping channel
2. RBW  $\leq$  channel spacing and  $\gg 1/T$ , where T is expected dwell time per channel
3. Sweep = as necessary to capture entire dwell time. Second plot may be required to demonstrate two successive hops on a channel
4. Trigger is set with appropriate trigger delay to place pulse near the center of the plot
5. Detector = peak
6. Trace mode = max hold
7. Marker-delta function used to determine transmit time per hop

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 7-5. Test Instrument & Measurement Setup**

### Test Notes


All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.

FCC ID: BCGA2378 IC: 579C-A2378	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 42 of 91

## Antenna 8

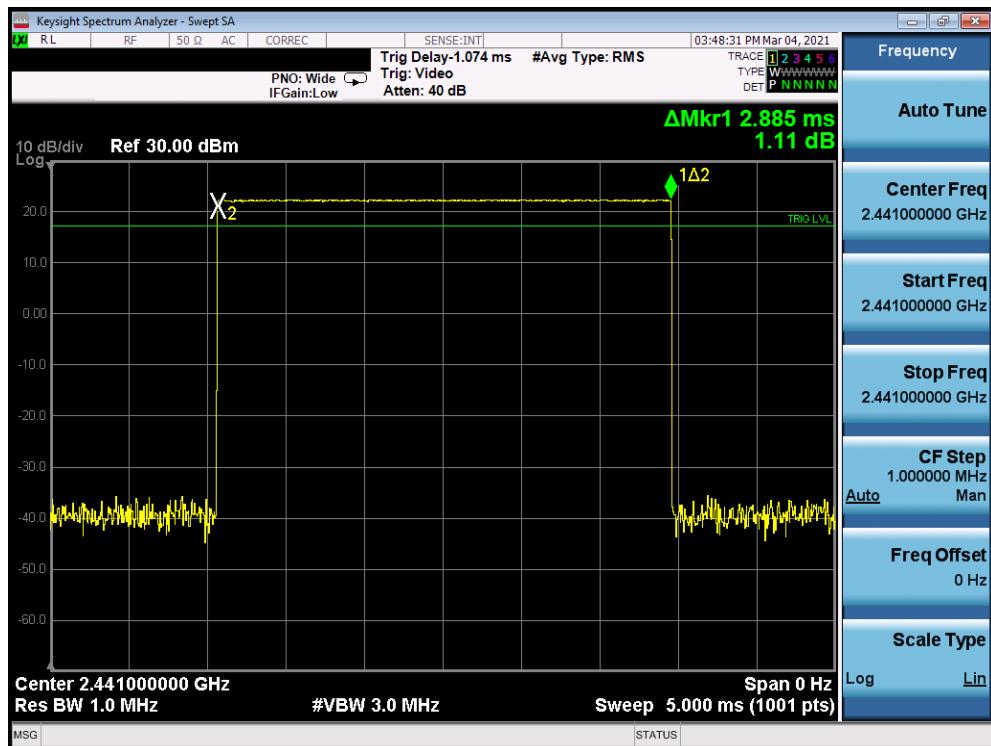


Plot 7-33. Time of Occupancy Plot Antenna 8 (Bluetooth, GFSK, ePA)

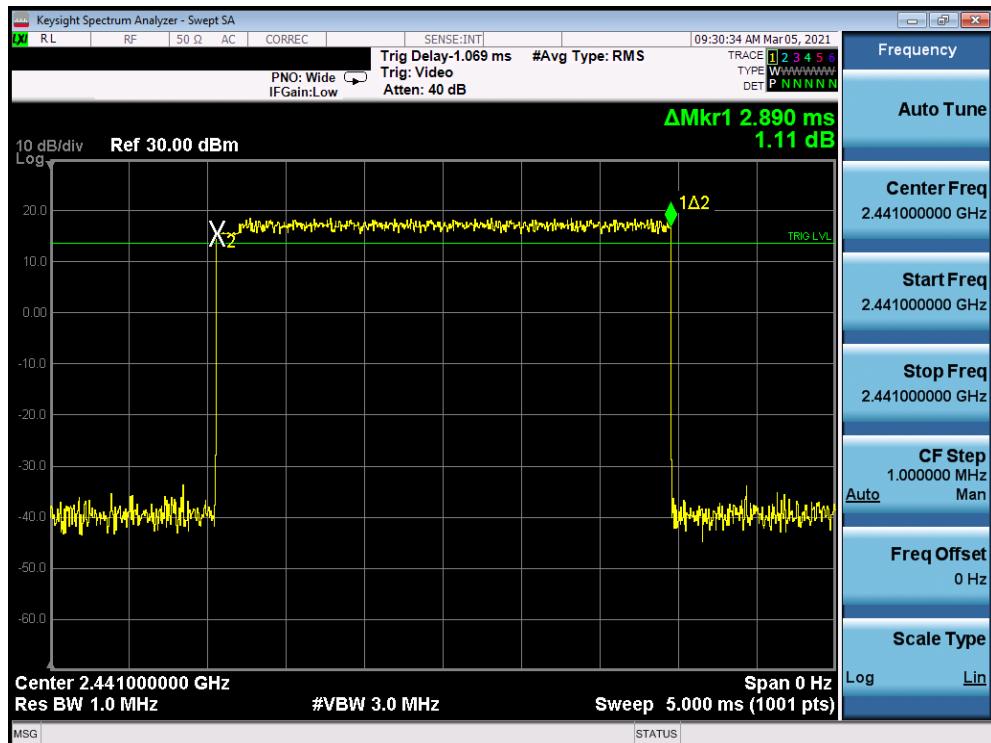


Plot 7-34. Time of Occupancy Plot Antenna 8 (Bluetooth, 8DPSK, ePA)

FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST®</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 43 of 91

## Antenna 7

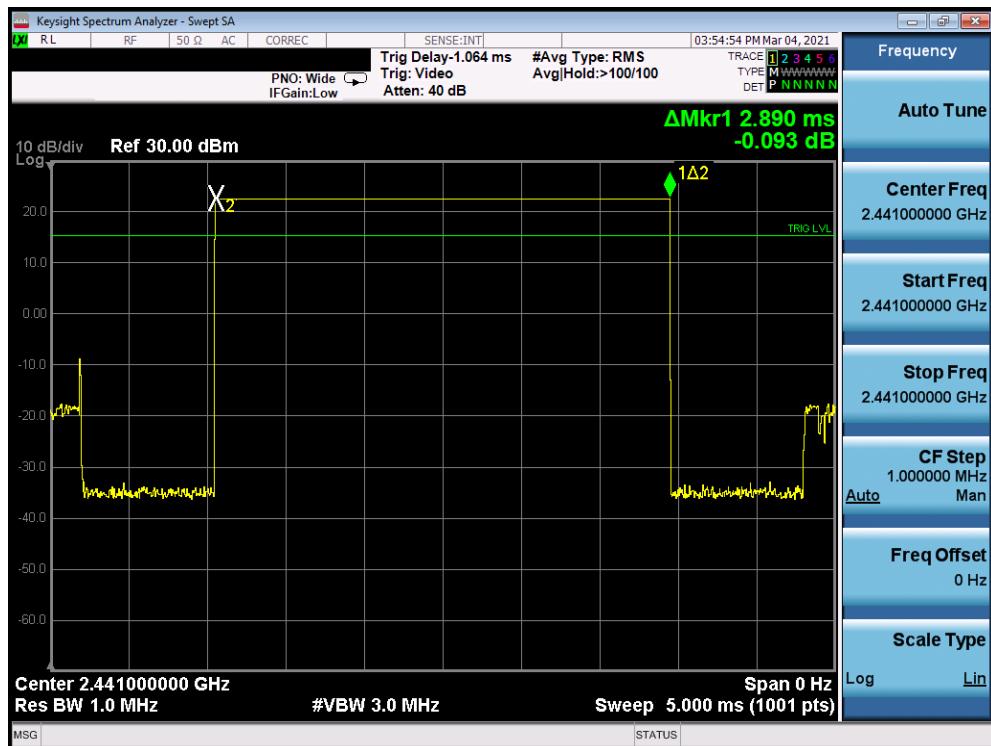

Plot 7-35. Time of Occupancy Plot Antenna 7 (Bluetooth, GFSK, ePA)

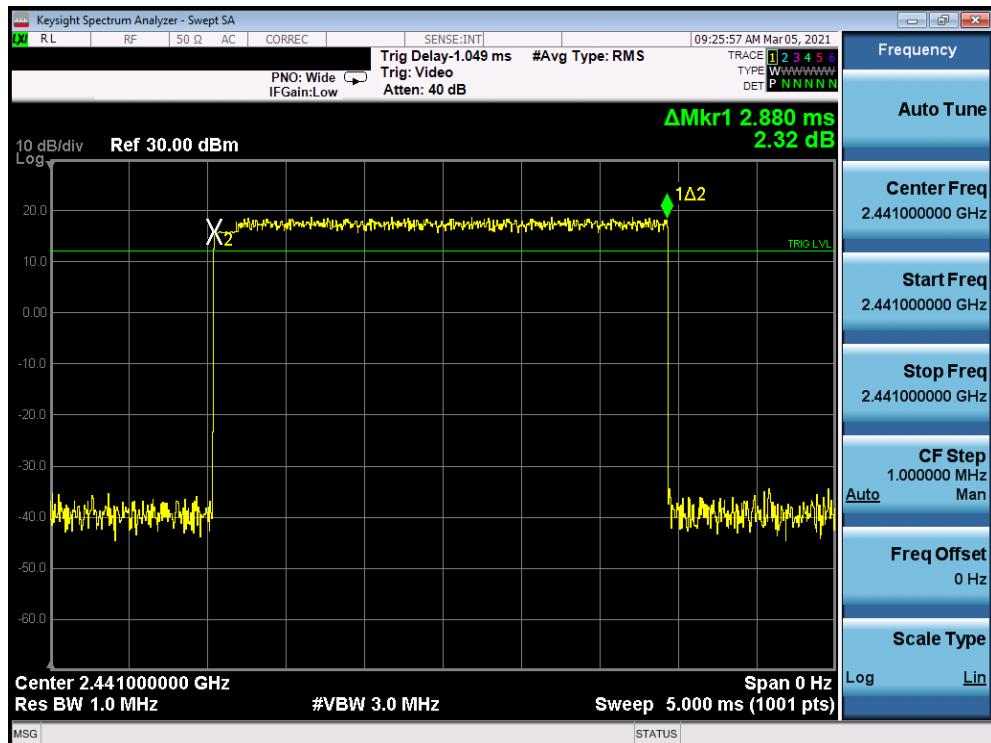

Plot 7-36. Time of Occupancy Plot Antenna 7 (Bluetooth, 8DPSK, ePA)

FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST®</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020/2/25/2021	EUT Type: Tablet Device	Page 44 of 91

## Bluetooth Time of Occupancy Calculation

Typically, Bluetooth 1x/EDR mode has a channel hopping rate of 1600 hops/s. Since 1x/EDR modes use 5 transmit and 1 receive slot, for a total of 6 slots, the Bluetooth transmitter is actually hopping at a rate of  $1600 / 6 = 266.67$  hops/s/slot

- $400\text{ms} \times 79 \text{ hopping channels} = 31.6 \text{ sec (Time of Occupancy Limit)}$
- Worst case BT has 266.67 hops/second (for 1x/EDR modes with DH5 operation)
- $266.67 \text{ hops/second} / 79 \text{ channels} = 3.38 \text{ hops/second (# of hops/second on one channel)}$
- $3.38 \text{ hops/second/channel} \times 31.6 \text{ seconds} = 106.67 \text{ hops (# hops over a 31.6 second period)}$
- $106.67 \text{ hops} \times 2.89 \text{ ms/channel} = 308.27 \text{ ms (worst case dwell time for one channel in 1x/EDR modes)}$

With AFH, the number of channels is reduced to a minimum of 20 channels and the channel hopping rate is reduced by 50% to 800 hops/s. AFH mode also uses 6 total slots so the Bluetooth transmitter hops at a rate of  $800 / 6 = 133.3$  hops/s/slot

- $400\text{ms} \times 20 \text{ hopping channels} = 8 \text{ sec (Time of Occupancy Limit)}$
- Worst case BT has 133.3 hops/second/slot (for AFH mode with DH5 operation)
- $133.3 \text{ hops/s} / 20 \text{ channels} = 6.67 \text{ hops/second (# of hops/second on one channel)}$
- $6.67 \text{ hops/s} / \text{channel} \times 8 \text{ seconds} = 53.34 \text{ hops (# hops over a 8 second period)}$
- $53.34 \text{ hops} \times 2.89 \text{ ms/channel} = 154.15 \text{ ms (worst case dwell time for one channel in AFH mode)}$

## Test Result

The measured worst case dwell time is below the limit of 0.4s.

FCC ID: BCGA2378 IC: 579C-A2378	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 45 of 91

## 7.7 Number of Hopping Channels

§15.247 (a.1.iii); RSS-247 [5.1(d)]

### Test Overview and Limit

Measurement is made while EUT is operating in hopping mode. ***This frequency hopping system must employ a minimum of 15 hopping channels.***

### Test Procedure Used

ANSI C63.10-2013 – Section 7.8.3

### Test Settings

1. Span = frequency of band of operation (divided into two plots)
2. RBW < 30% of channel spacing or 20dB bandwidth, whichever is smaller.
3. VBW  $\geq$  RBW
4. Sweep = auto
5. Detector = peak
6. Trace mode = max hold
7. Trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 7-6. Test Instrument & Measurement Setup**

### Test Notes


1. The frequency spectrum was broken up into two sub-ranges to clearly show all of the hopping frequencies. In AFH mode, this device operates using 20 channels so the requirement for minimum number of hopping channels is satisfied.
2. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.

FCC ID: BCGA2378 IC: 579C-A2378	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 46 of 91

## Antenna 8

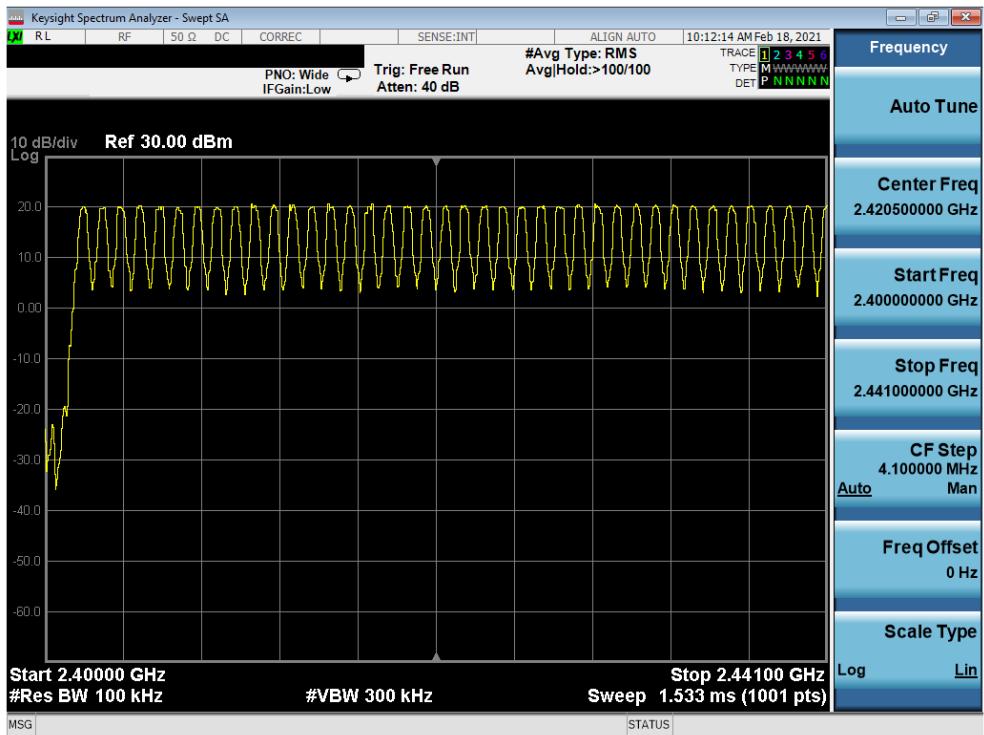


Plot 7-37. Low End Spectrum Channel Hopping Plot Antenna 8 (Bluetooth, GFSK, ePA)

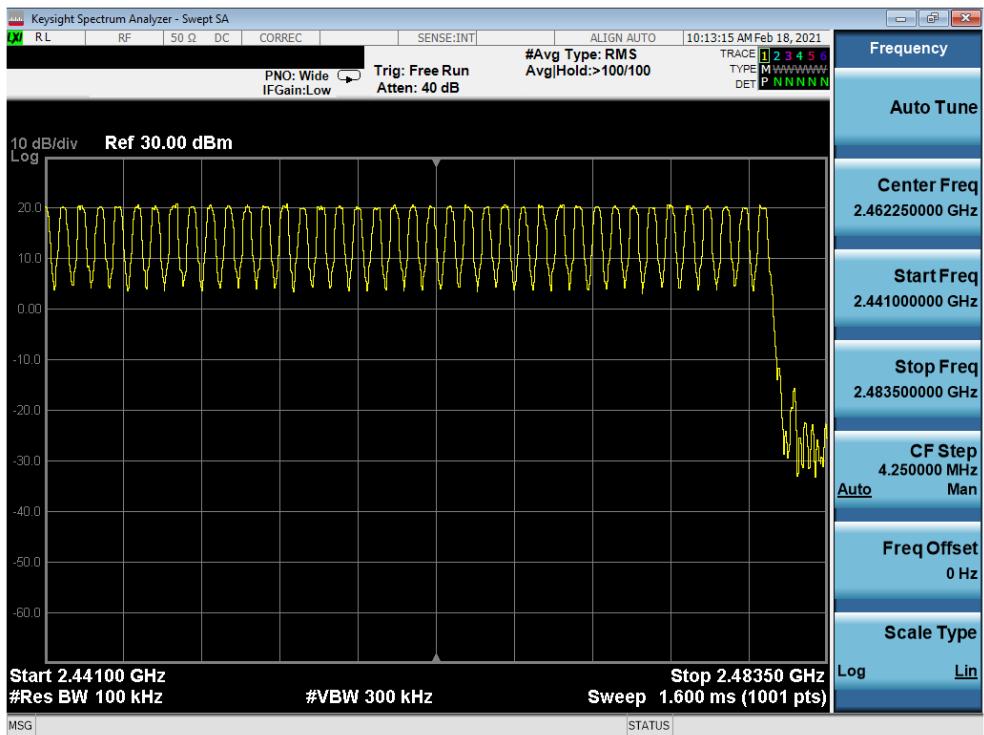


Plot 7-38. High End Spectrum Channel Hopping Plot Antenna 8 (Bluetooth, GFSK, ePA)

FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device		Page 47 of 91

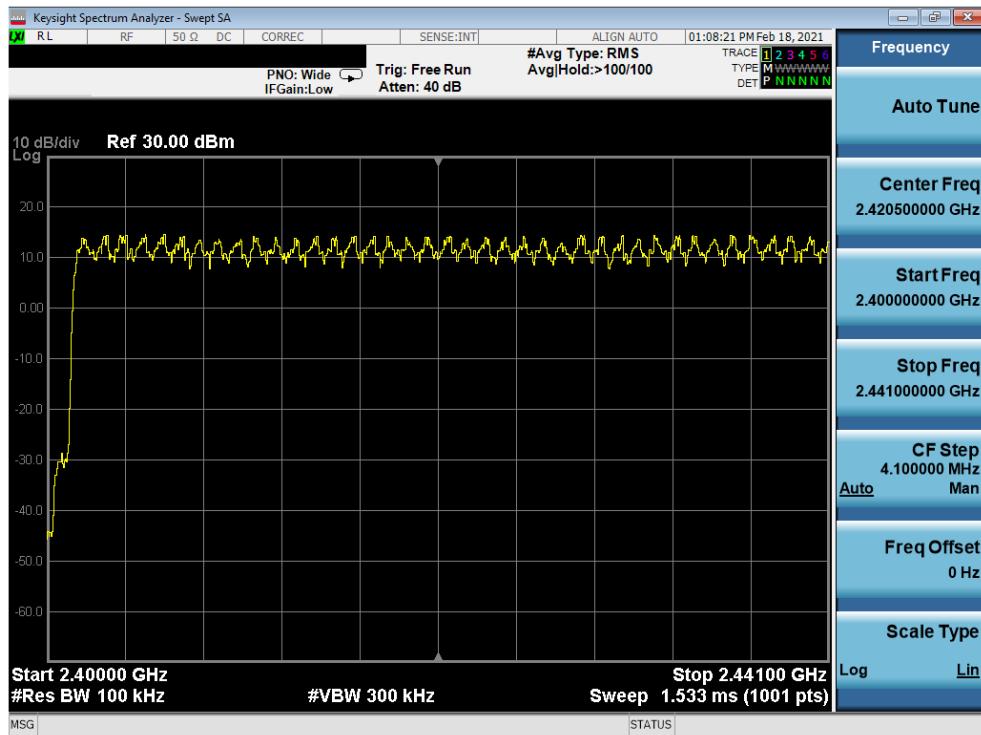


Plot 7-39. Low End Spectrum Channel Hopping Plot Antenna 8 (Bluetooth, 8DPSK, ePA)

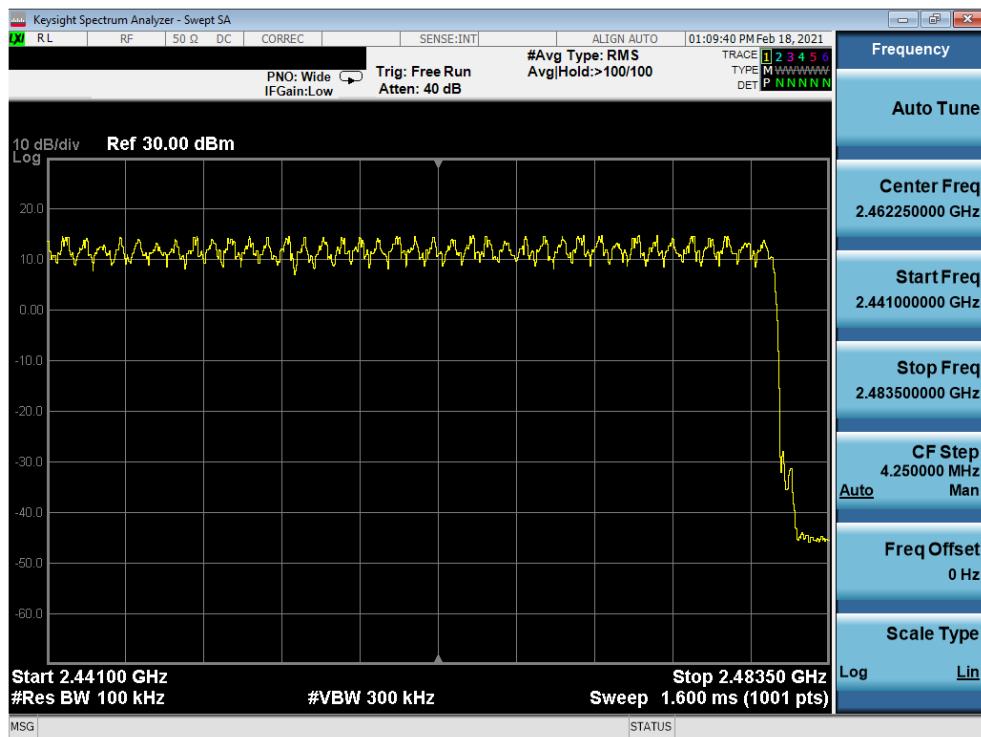


Plot 7-40. High End Spectrum Channel Hopping Plot Antenna 8 (Bluetooth, 8DPSK, ePA)

FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 48 of 91

## Antenna 7

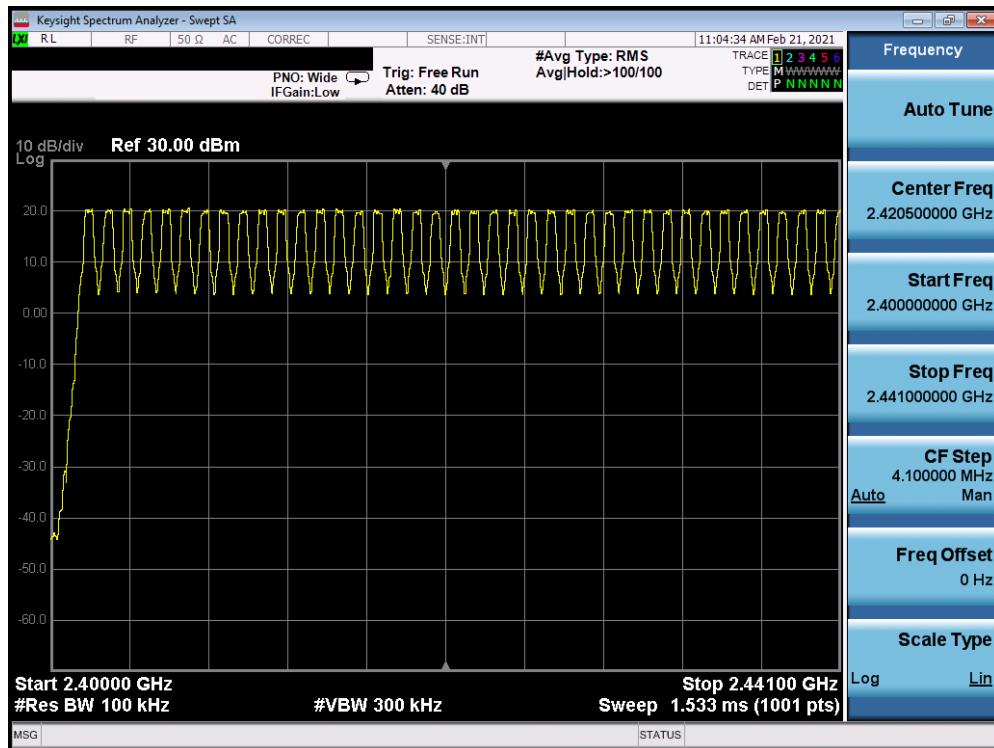


Plot 7-41. Low End Spectrum Channel Hopping Plot Antenna 7 (Bluetooth, GFSK, ePA)

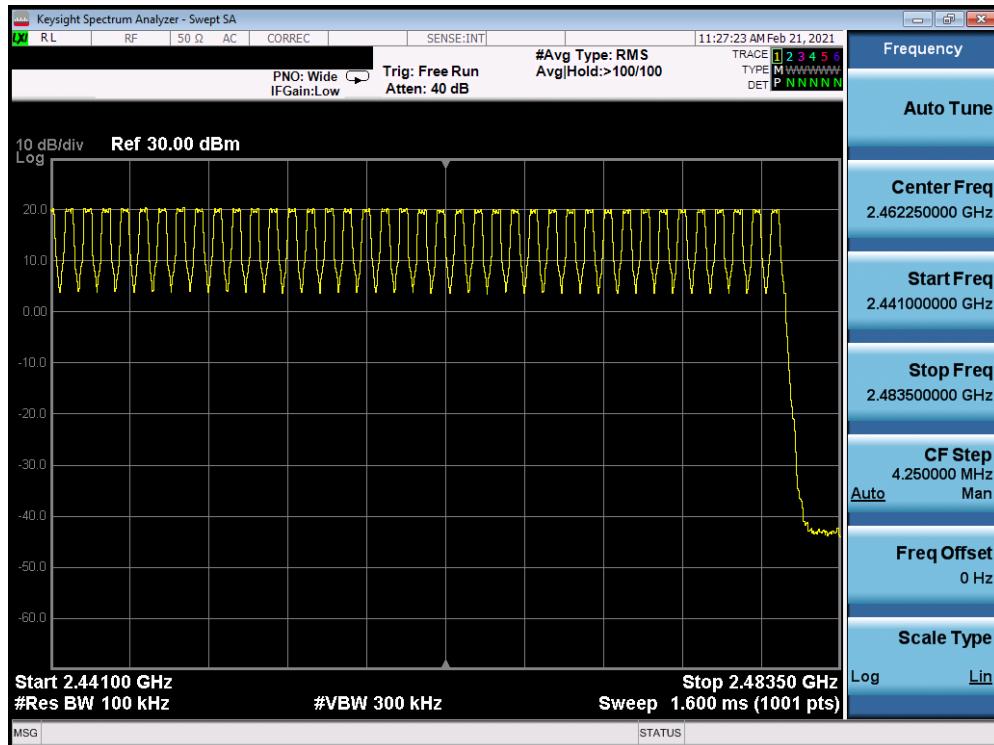


Plot 7-42. High End Spectrum Channel Hopping Plot Antenna 7 (Bluetooth, GFSK, ePA)

FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 49 of 91	

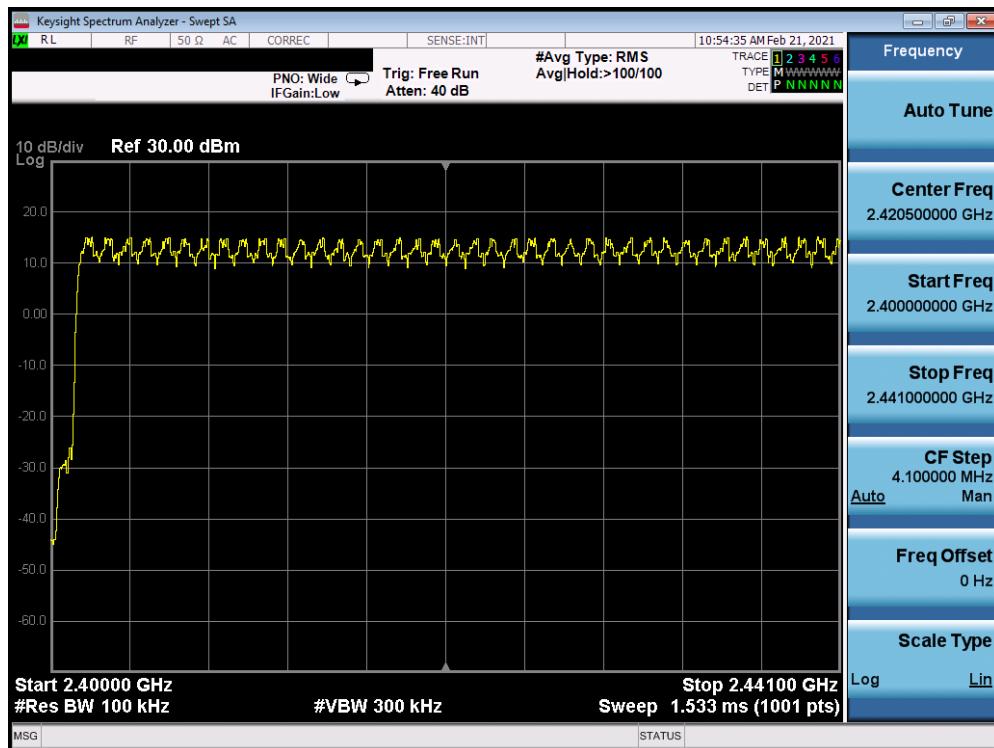

Plot 7-43. Low End Spectrum Channel Hopping Plot Antenna 7 (Bluetooth, 8DPSK, ePA)

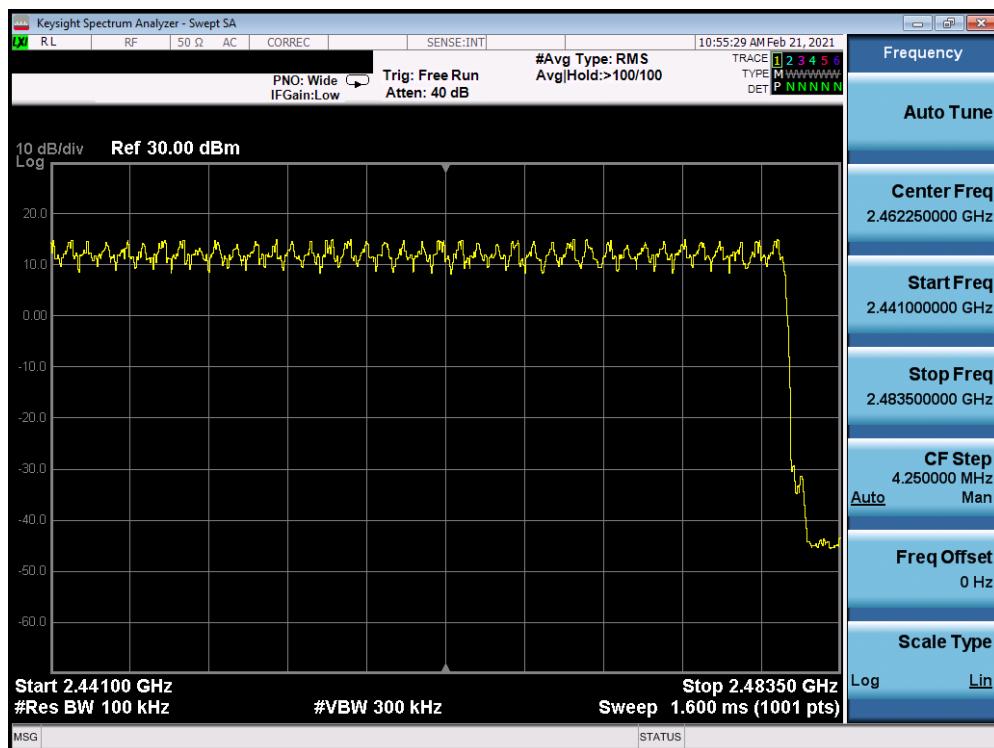

Plot 7-44. High End Spectrum Channel Hopping Plot Antenna 7 (Bluetooth, 8DPSK, ePA)

FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C210102000-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 50 of 91

## 7.8 Conducted Spurious Emissions

§15.247 (d); RSS-247 [5.5]

### Test Overview and Limit

Conducted out-of-band spurious emissions were investigated from 30MHz up to 25GHz to include the 10<sup>th</sup> harmonic of the fundamental transmit frequency. **The maximum permissible out-of-band emission level is 20 dBc.**

### Test Procedure Used

ANSI C63.10-2013 – Section 7.8.8

### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz\* (See note below)
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 7-7. Test Instrument & Measurement Setup**

### Test Notes


1. Out-of-band conducted spurious emissions were investigated for all data rates and the worst case emissions were found with the EUT transmitting at 1Mbps. The display line shown in the following plots is the limit at 20dB below the fundamental emission level measured in a 100kHz bandwidth. However, the traces in the following plots are measured with a 1MHz RBW to reduce test time, so the display line may not necessarily appear to be 20dB below the level of the fundamental in a 1MHz bandwidth.
2. The unit was tested with all possible mode and power schemes and only the highest emission is reported.

FCC ID: BCGA2378 IC: 579C-A2378	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 51 of 91

## Antenna 8

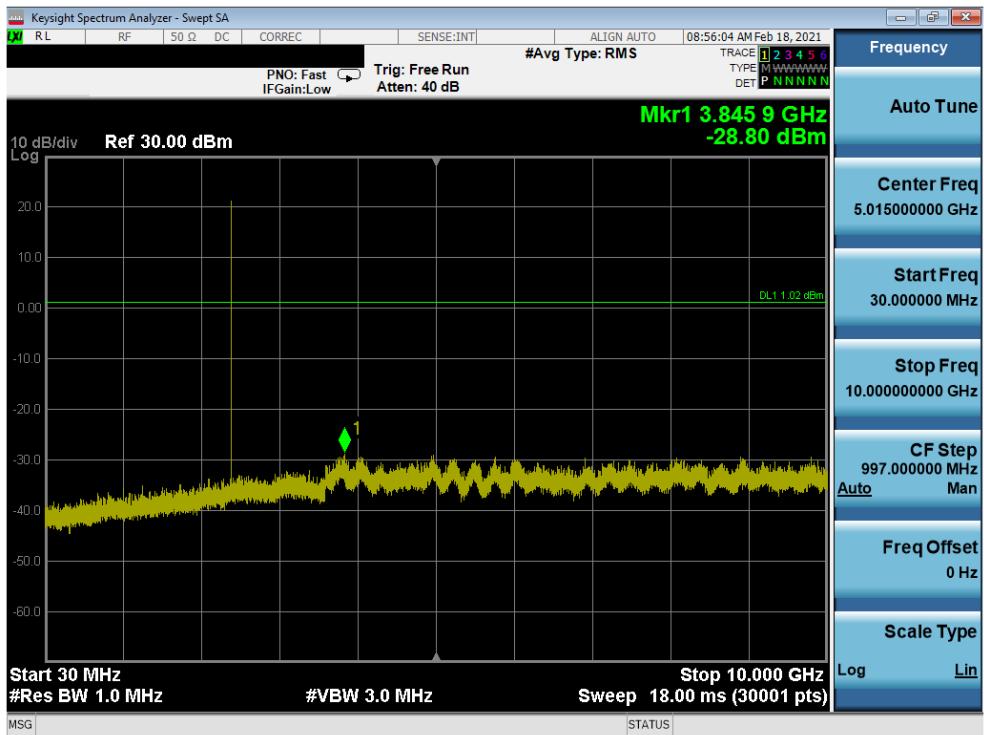


Plot 7-45. Conducted Spurious Plot Antenna 8 (Bluetooth, GFSK, ePA – Ch. 0)

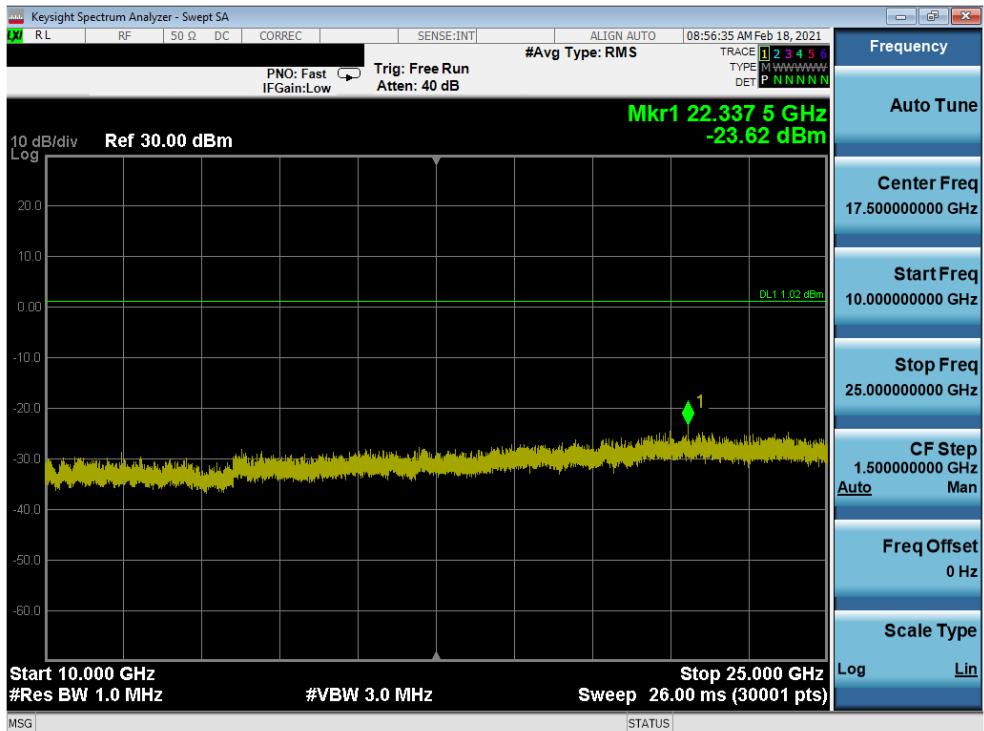


Plot 7-46. Conducted Spurious Plot Antenna 8 (Bluetooth, GFSK, ePA – Ch. 0)

FCC ID: BCGA2378 IC: 579C-A2378	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 52 of 91

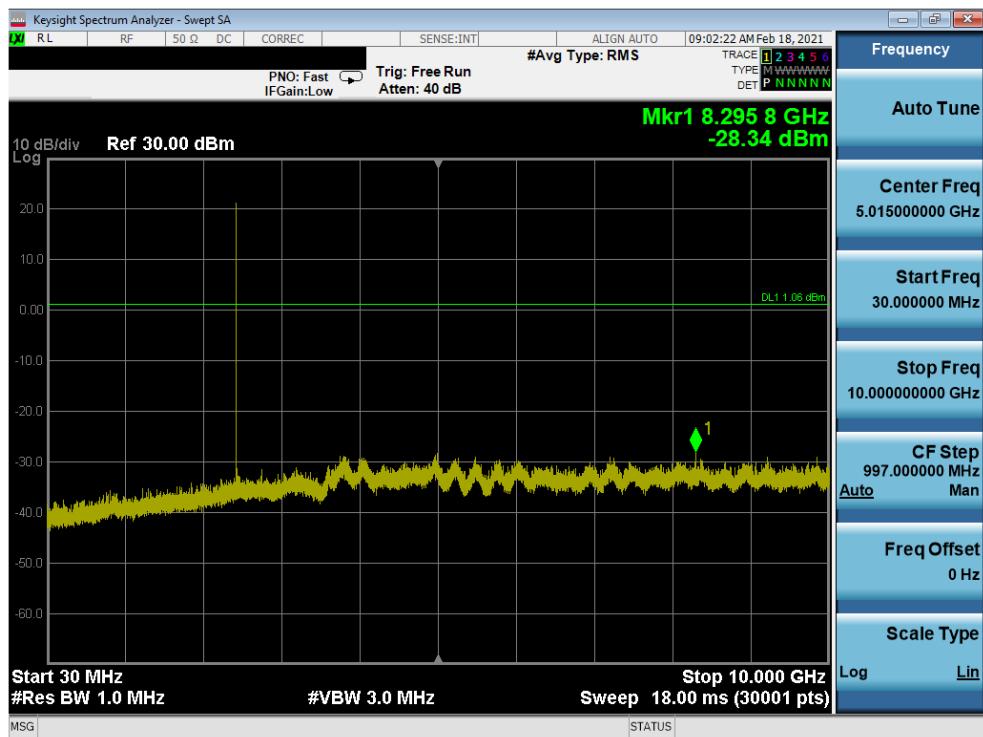


Plot 7-47. Conducted Spurious Plot Antenna 8 (Bluetooth, GFSK, ePA – Ch. 39)

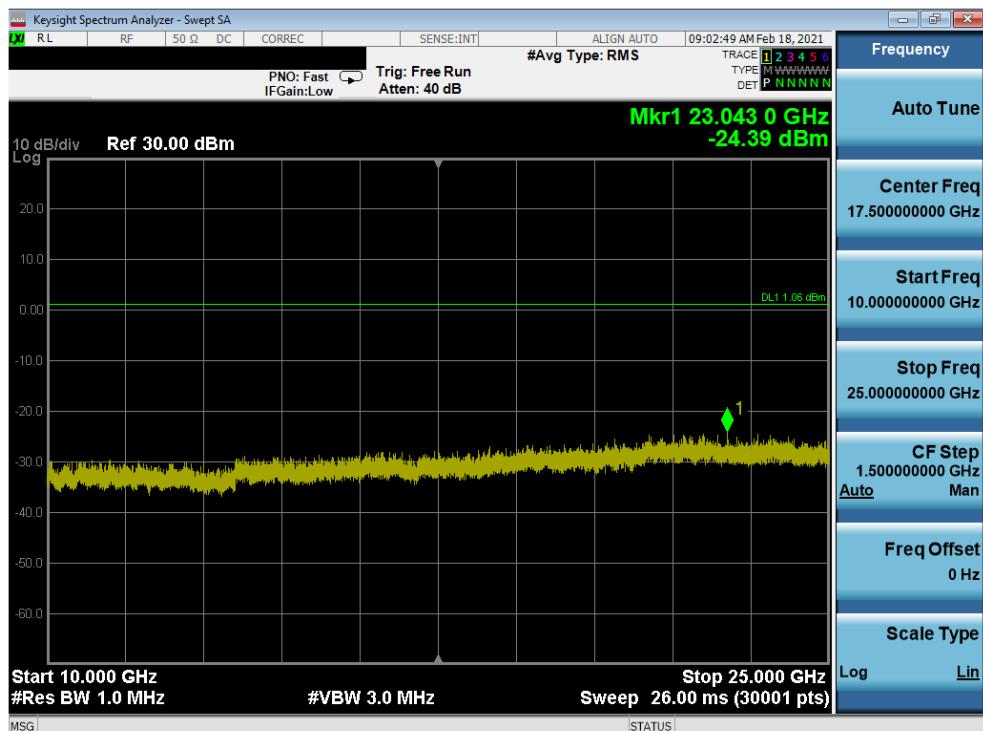


Plot 7-48. Conducted Spurious Plot Antenna 8 (Bluetooth, GFSK, ePA Ch. 39)

FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST®</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 53 of 91

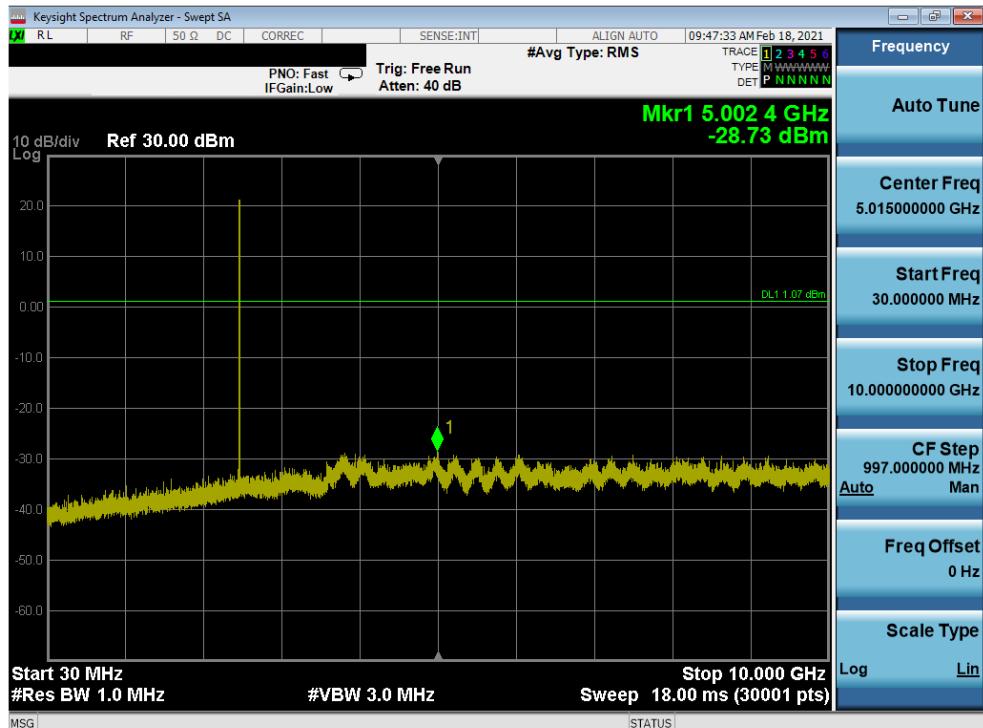


Plot 7-49. Conducted Spurious Plot Antenna 8 (Bluetooth, GFSK, ePA – Ch. 78)

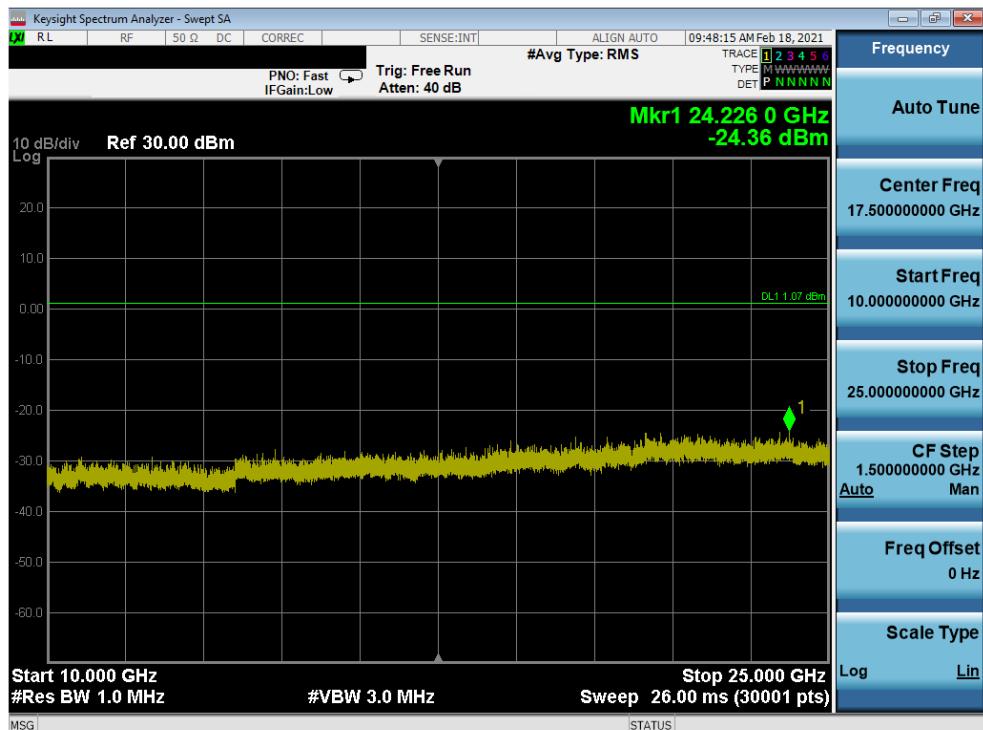


Plot 7-50. Conducted Spurious Plot Antenna 8 (Bluetooth, GFSK, ePA – Ch. 78)

FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 54 of 91

## Antenna 7

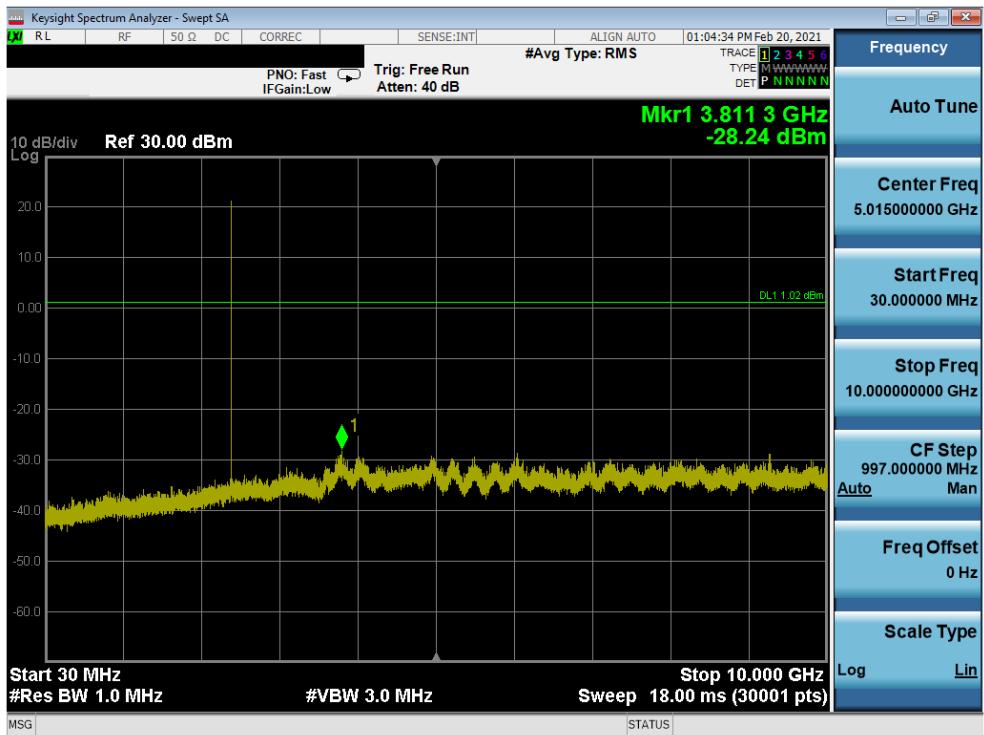


Plot 7-51. Conducted Spurious Plot Antenna 7 (Bluetooth, GFSK, ePA – Ch. 0)

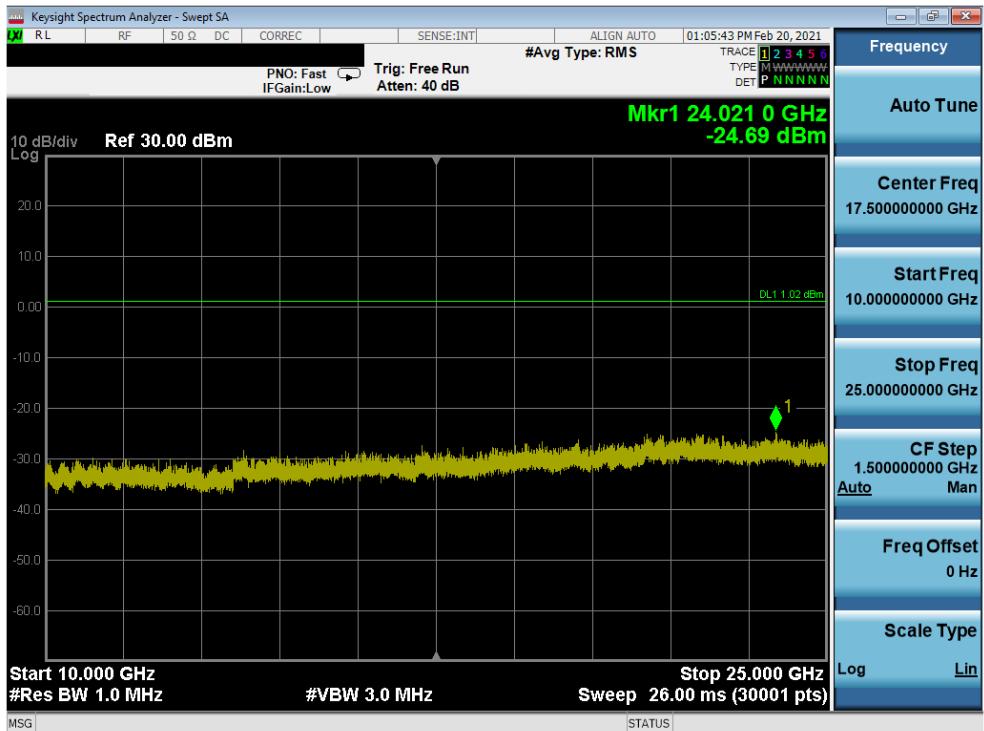


Plot 7-52. Conducted Spurious Plot Antenna 7 (Bluetooth, GFSK, ePA – Ch. 0)

FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 55 of 91	

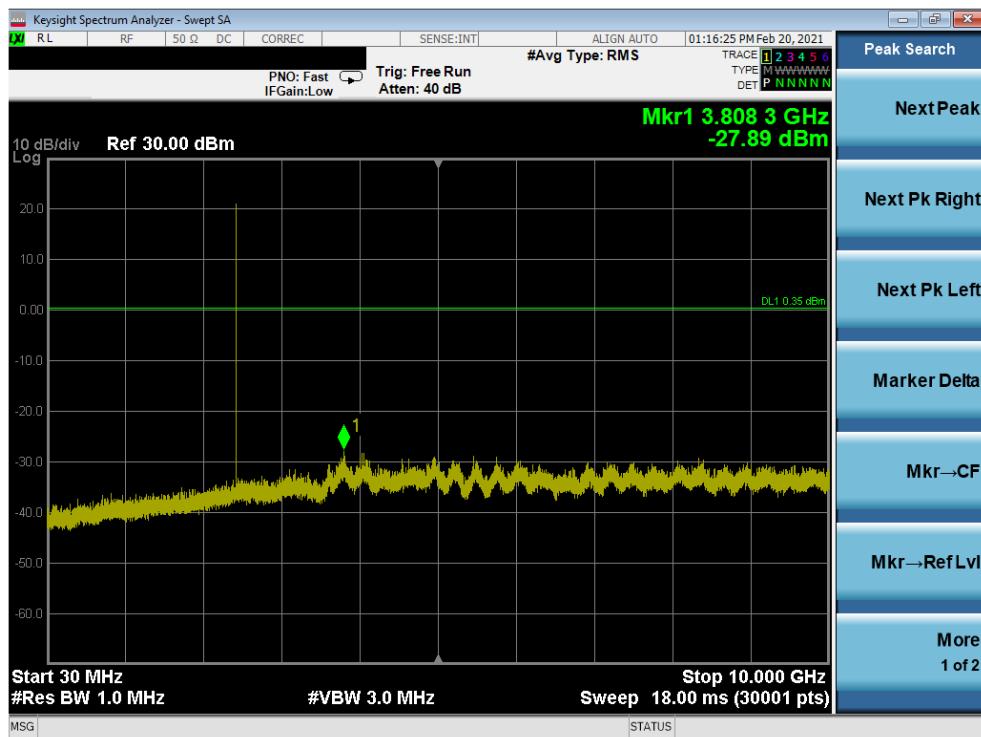


Plot 7-53. Conducted Spurious Plot Antenna 7 (Bluetooth, GFSK, ePA – Ch. 39)

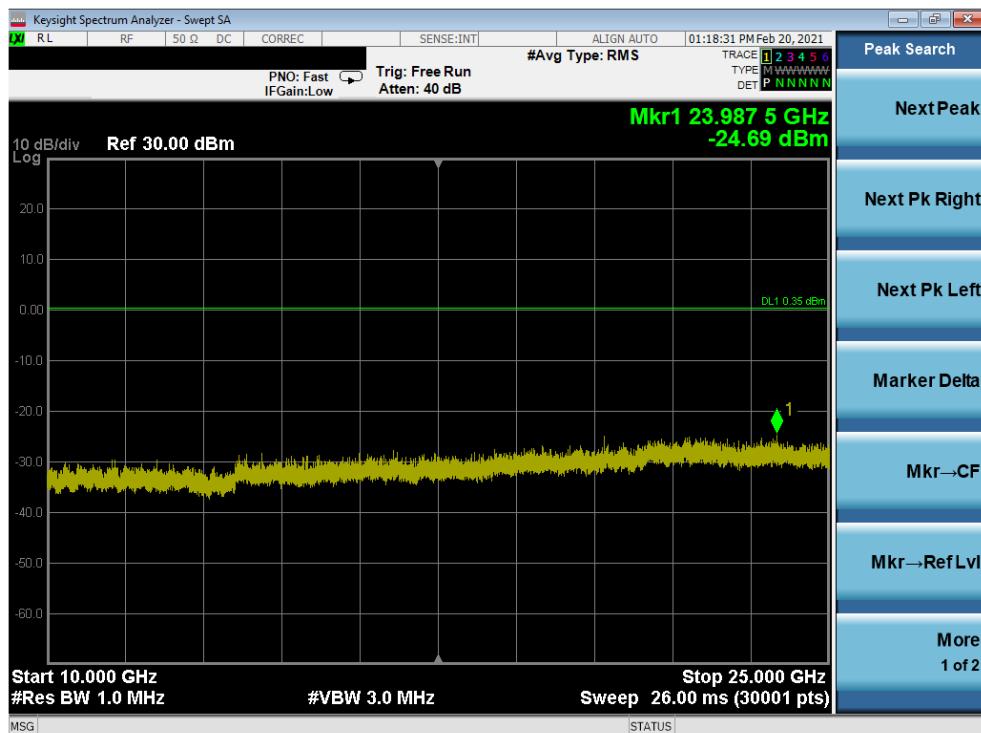


Plot 7-54. Conducted Spurious Plot Antenna 7 (Bluetooth, GFSK, ePA Ch. 39)

FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST®</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 56 of 91

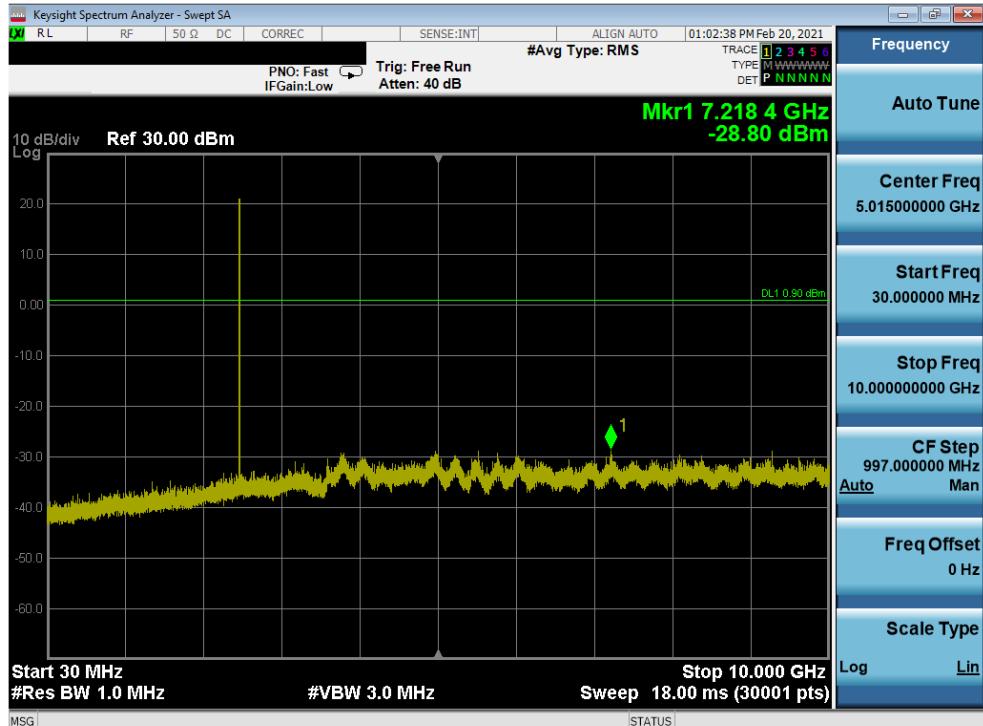

Plot 7-55. Conducted Spurious Plot Antenna 7 (Bluetooth, GFSK, ePA – Ch. 78)

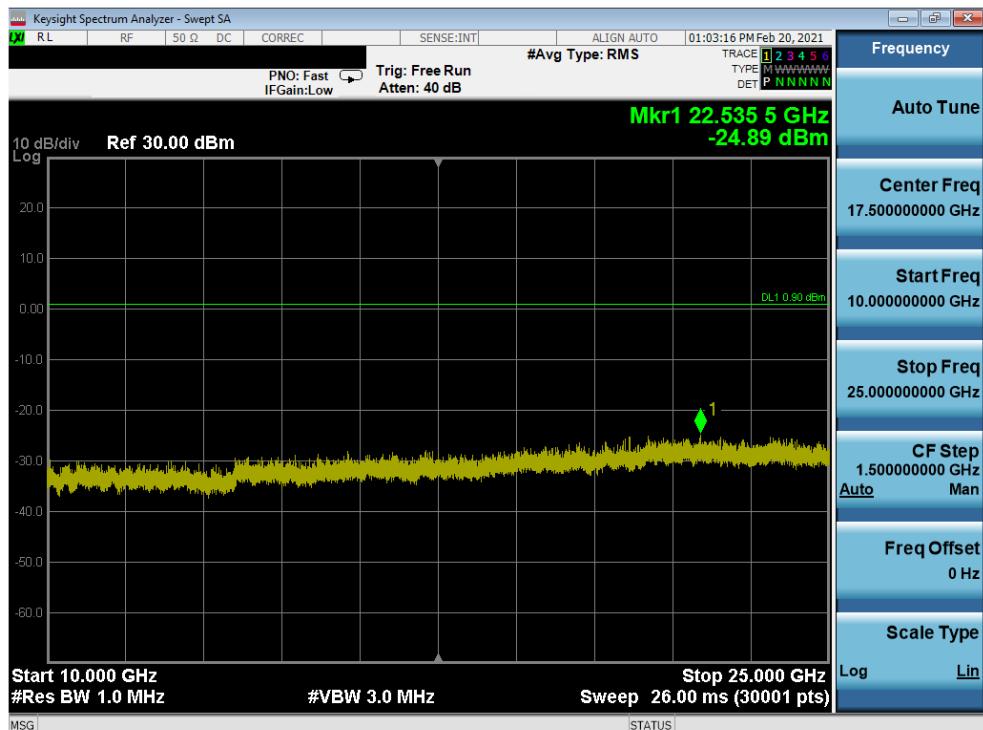

Plot 7-56. Conducted Spurious Plot Antenna 7 (Bluetooth, GFSK, ePA – Ch. 78)

FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 57 of 91

## 7.9 Radiated Spurious Emissions – Above 1GHz

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-12 per Section 15.209 and RSS-Gen (8.9).***

Frequency	Field Strength [ $\mu$ V/m]	Measured Distance [Meters]
Above 960.0 MHz	500	3

**Table 7-12. Radiated Limits**

### Test Procedure Used

ANSI C63.10-2013 – Section 6.6.4.3

### Test Settings


#### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA2378 IC: 579C-A2378	 <b>PCTEST®</b> Proud to be part of  MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 58 of 91

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

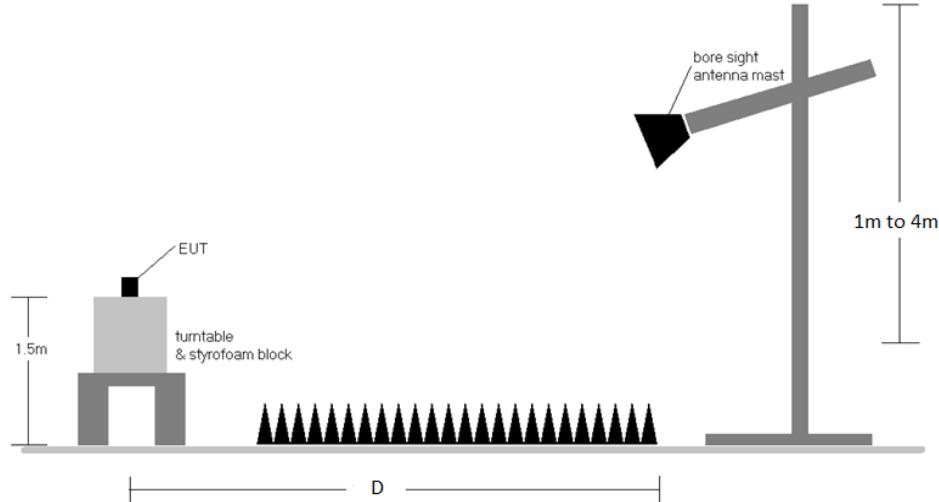

**Figure 7-8. Radiated Test Setup >1GHz**

## Test Notes

1. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-12.
2. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is measured from 9kHz to the 10<sup>th</sup> harmonic and the worst-case emissions are reported.
5. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
6. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
8. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.
9. Average emissions were not reported since the duty cycle correction factor was greater than 20dB.

FCC ID: BCGA2378 IC: 579C-A2378	 <b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device		Page 59 of 91

## Sample Calculation

- Field Strength Level [ $\text{dB}_{\mu\text{V/m}}$ ] = Analyzer Level [ $\text{dBm}$ ] + 107 + AFCL [ $\text{dB/m}$ ]
- AFCL [ $\text{dB/m}$ ] = Antenna Factor [ $\text{dB/m}$ ] + Cable Loss [ $\text{dB}$ ] – Preamplifier Gain [ $\text{dB}$ ]
- Margin [ $\text{dB}$ ] = Field Strength Level [ $\text{dB}_{\mu\text{V/m}}$ ] – Limit [ $\text{dB}_{\mu\text{V/m}}$ ]

## Duty Cycle Correction Factor Calculation

- Channel hop rate = 800 hops/second (AFH Mode)
- Adjusted channel hop rate for DH5 mode = 133.33 hops/second
- Time per channel hop = 1 / 133.33 hops/second = 7.50 ms
- Time to cycle through all channels = 7.50 x 20 channels = 150 ms
- Number of times transmitter hits on one channel = 100 ms / 150 ms = 1 time(s)
- Worst case dwell time = 7.5 ms

Duty cycle correction factor =  $20\log_{10}(7.5\text{ms}/100\text{ms}) = -22.5 \text{ dB}$

## Average Emission Calculation


- Average Emission = Measured Peak Emissions [ $\text{dB}_{\mu\text{V/m}}$ ] – Duty Cycle Correction Factor [ $\text{dB}$ ]

FCC ID: BCGA2378 IC: 579C-A2378	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 60 of 91

## Radiated Spurious Emission Measurements (1 – 18GHz)

[§15.205](#) [§15.209](#) [§15.247 \(d\)](#); [RSS-Gen \[8.9\]](#)

### Antenna 8

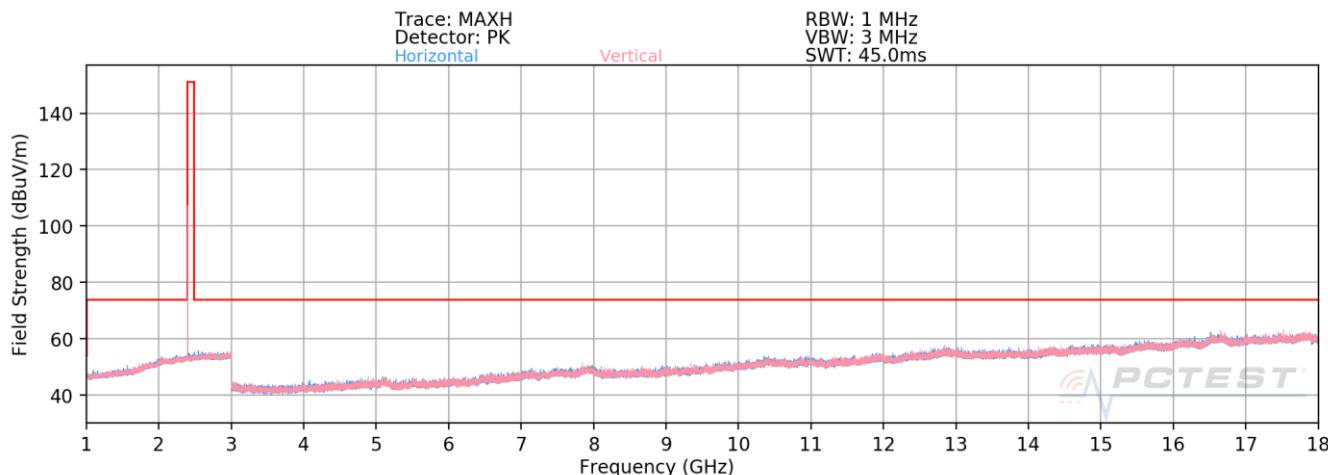


**Plot 7-57. Radiated Spurious Emissions above 1GHz Antenna 8 (BT GFSK ePA – Ch. 0)**

Worst Case Mode:	Bluetooth
Worst Case Data Rate:	1 Mbps
Measurement Distance:	3 Meters
Operating Frequency:	2402MHz
Channel:	0

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4804	Peak	H	-	-	-70.67	9.09	45.42	73.98	-28.56
12010	Peak	H	-	-	-74.20	21.24	54.04	73.98	-19.93

**Table 7-13. Radiated Measurements Antenna 8**

FCC ID: BCGA2378 IC: 579C-A2378	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>				Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device			Page 61 of 91

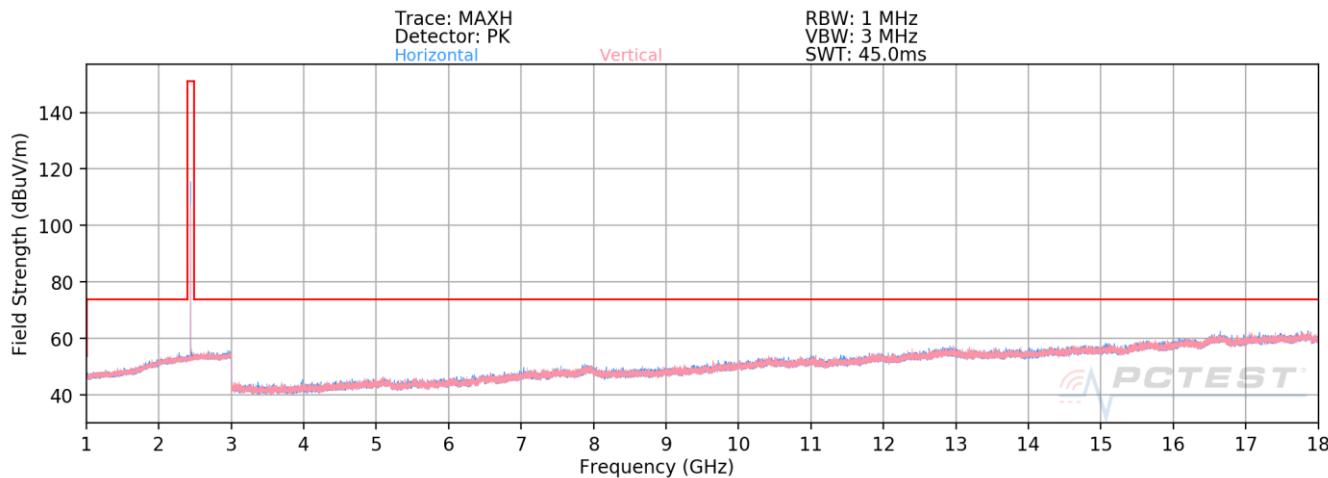


**Plot 7-58. Radiated Spurious Emissions above 1GHz Antenna 8 (BT GFSK ePA – Ch. 39)**

Worst Case Mode: Bluetooth  
Worst Case Data Rate: 1 Mbps  
Measurement Distance: 3 Meters  
Operating Frequency: 2441MHz  
Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4882	Peak	H	-	-	-71.02	9.49	45.47	73.98	-28.51
7323	Peak	H	-	-	-71.90	13.93	49.03	73.98	-24.95
12205	Peak	H	-	-	-74.85	21.40	53.55	73.98	-20.42

**Table 7-14. Radiated Measurements Antenna 8**

FCC ID: BCGA2378 IC: 579C-A2378	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>				Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device			

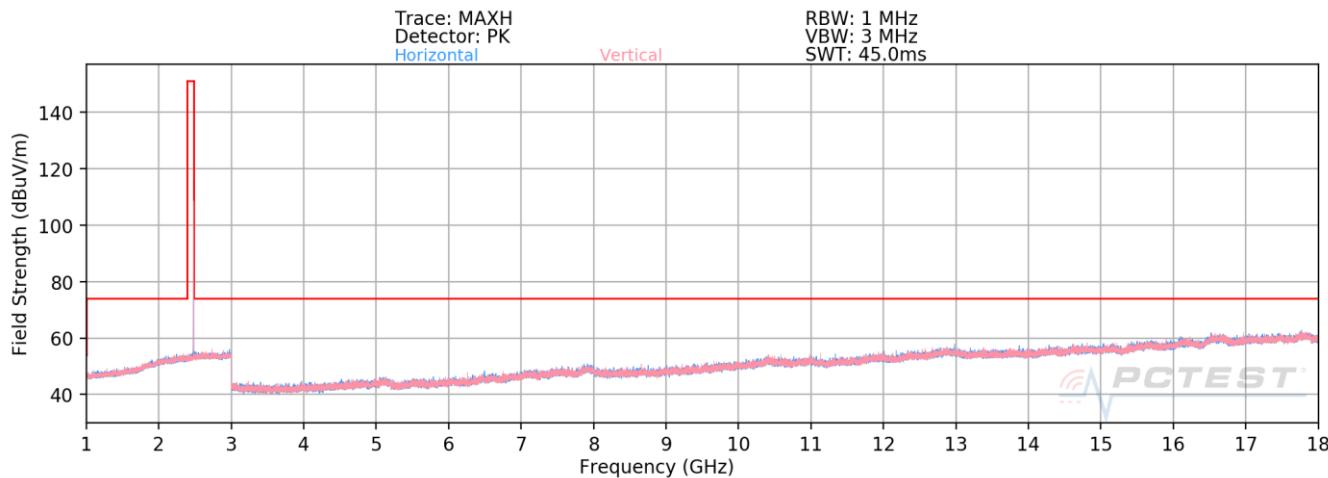

**Plot 7-59. Radiated Spurious Emissions above 1GHz Antenna 8 (BT GFSK ePA – Ch. 78)**

Worst Case Mode: Bluetooth  
Worst Case Data Rate: 1 Mbps  
Measurement Distance: 3 Meters  
Operating Frequency: 2480MHz  
Channel: 78

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4960	Peak	H	-	-	-70.68	9.41	45.73	73.98	-28.25
7440	Peak	H	-	-	-72.73	14.77	49.04	73.98	-24.94
12400	Peak	H	-	-	-74.14	21.89	54.75	73.98	-19.23


**Table 7-15. Radiated Measurements Antenna 8**

FCC ID: BCGA2378 IC: 579C-A2378	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 63 of 91	

## Radiated Spurious Emission Measurements (1 – 18GHz)

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

### Antenna 7

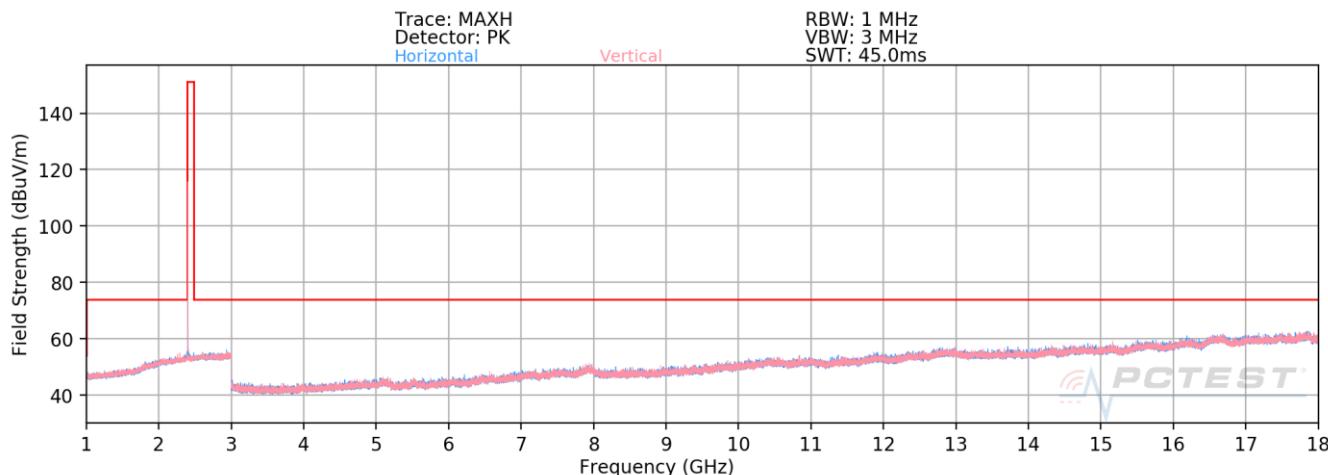


**Plot 7-60. Radiated Spurious Emissions above 1GHz Antenna 7 (BT GFSK ePA – Ch. 0)**

Worst Case Mode: Bluetooth  
 Worst Case Data Rate: 1 Mbps  
 Measurement Distance: 3 Meters  
 Operating Frequency: 2402MHz  
 Channel: 0

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4804.00	Peak	H	-	-	-70.55	9.09	45.54	73.98	-28.44
12010.00	Peak	H	-	-	-73.92	21.24	54.32	73.98	-19.65

**Table 7-16. Radiated Measurements Antenna 7**

FCC ID: BCGA2378 IC: 579C-A2378	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>				Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device			

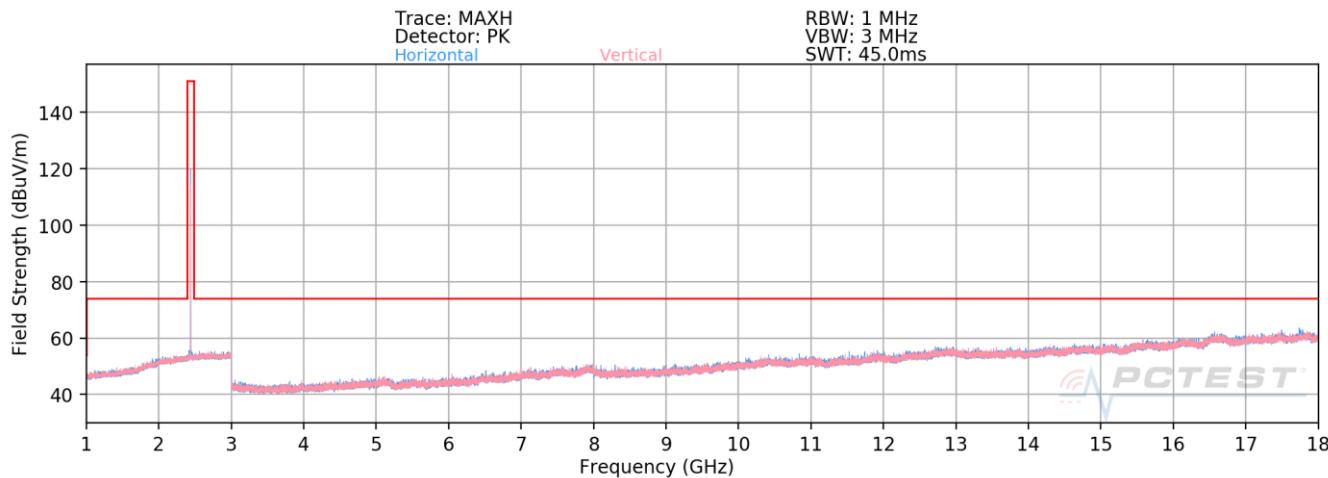


**Plot 7-61. Radiated Spurious Emissions above 1GHz Antenna 7 (BT GFSK ePA – Ch. 39)**

Worst Case Mode: Bluetooth  
Worst Case Data Rate: 1 Mbps  
Measurement Distance: 3 Meters  
Operating Frequency: 2441MHz  
Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4882.00	Peak	H	-	-	-70.62	9.49	45.87	73.98	-28.11
7323.00	Peak	H	-	-	-72.77	13.93	48.16	73.98	-25.82
12205.00	Peak	H	-	-	-74.94	21.40	53.46	73.98	-20.51

**Table 7-17. Radiated Measurements Antenna 7**

FCC ID: BCGA2378 IC: 579C-A2378	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>				Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device			

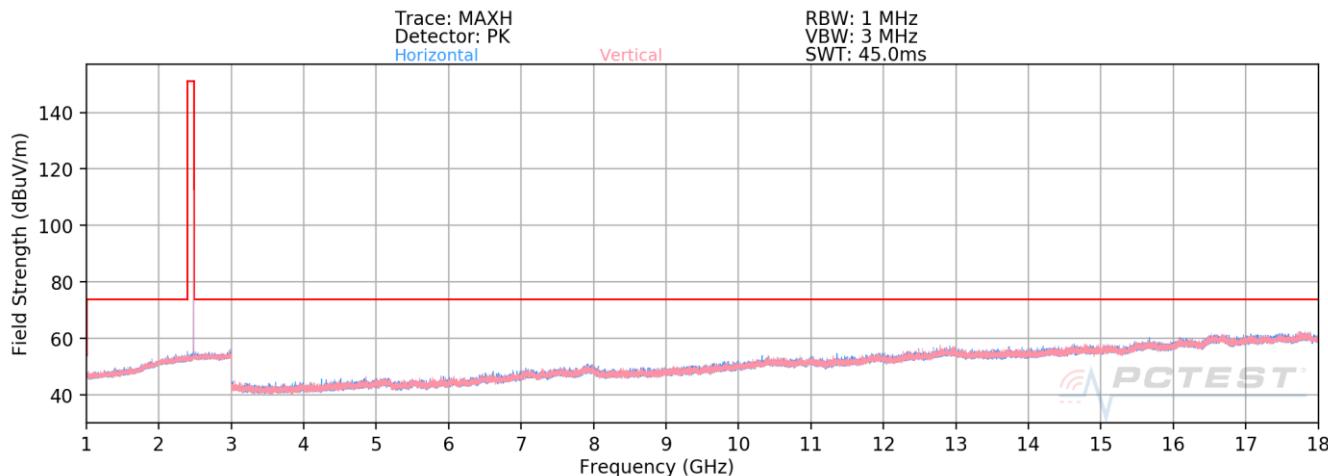

**Plot 7-62. Radiated Spurious Emissions above 1GHz Antenna 7 (BT GFSK ePA – Ch. 78)**

Worst Case Mode: Bluetooth  
Worst Case Data Rate: 1 Mbps  
Measurement Distance: 3 Meters  
Operating Frequency: 2480MHz  
Channel: 78

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4960.00	Peak	H	-	-	-70.58	9.41	45.83	73.98	-28.15
7440.00	Peak	H	-	-	-72.74	14.77	49.03	73.98	-24.95
12400.00	Peak	H	-	-	-74.97	21.89	53.92	73.98	-20.06


**Table 7-18. Radiated Measurements Antenna 7**

FCC ID: BCGA2378 IC: 579C-A2378	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>				Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device			

## Radiated Spurious Emission Measurements (1 – 18GHz)

[§15.205](#) [§15.209](#) [§15.247 \(d\)](#); [RSS-Gen \[8.9\]](#)

### TxBF

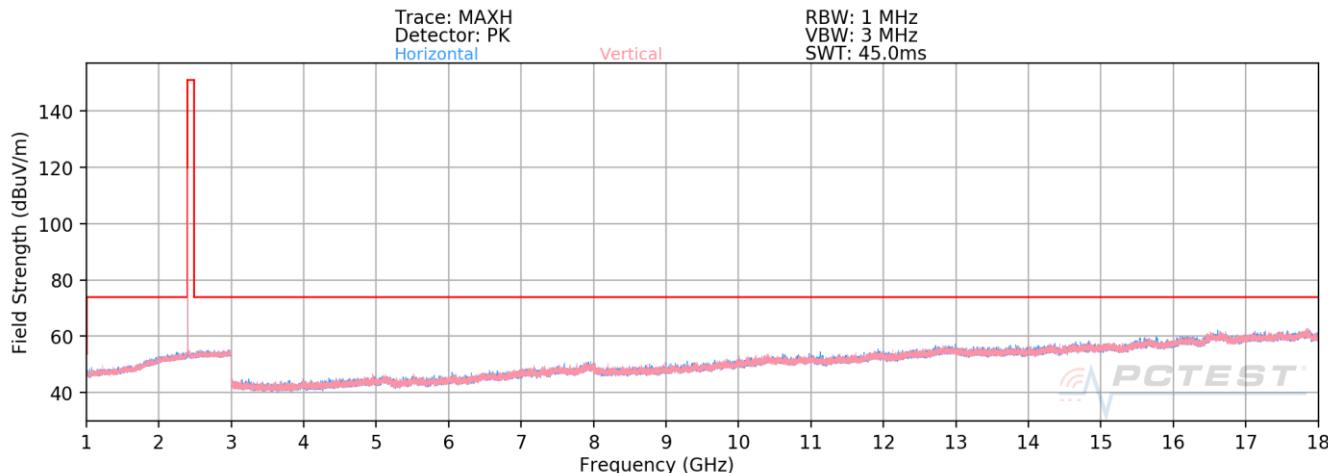


**Plot 7-63. Radiated Spurious Emissions above 1GHz TxBF (BT GFSK ePA – Ch. 0)**

Worst Case Mode:	Bluetooth
Worst Case Data Rate:	1 Mbps
Measurement Distance:	3 Meters
Operating Frequency:	2402MHz
Channel:	0

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4804.00	Peak	V	267	152	-69.47	9.09	46.62	73.98	-27.36
12010.00	Peak	V	-	-	-74.61	21.24	53.63	73.98	-20.34

**Table 7-19. Radiated Measurements TxBF**

FCC ID: BCGA2378 IC: 579C-A2378	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>				Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device			

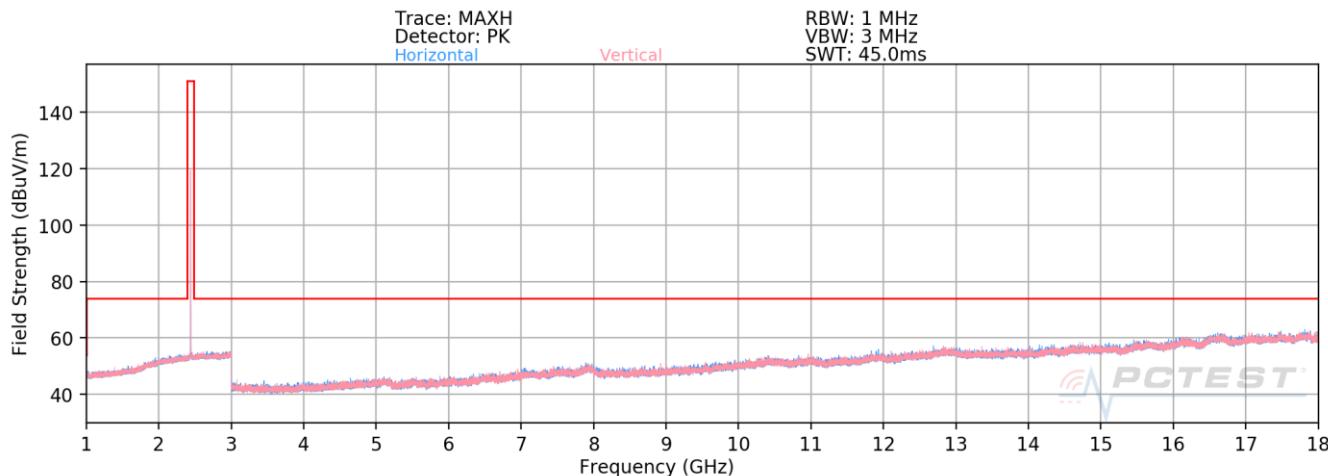


**Plot 7-64. Radiated Spurious Emissions above 1GHz TxBF (BT GFSK ePA – Ch. 39)**

Worst Case Mode: Bluetooth  
Worst Case Data Rate: 1 Mbps  
Measurement Distance: 3 Meters  
Operating Frequency: 2441MHz  
Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4882.00	Peak	V	273	156	-70.54	9.49	45.95	73.98	-28.03
7323.00	Peak	V	-	-	-71.73	13.93	49.20	73.98	-24.78
12205.00	Peak	V	-	-	-74.68	21.40	53.72	73.98	-20.25

**Table 7-20. Radiated Measurements TxBF**

FCC ID: BCGA2378 IC: 579C-A2378	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>				Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device			

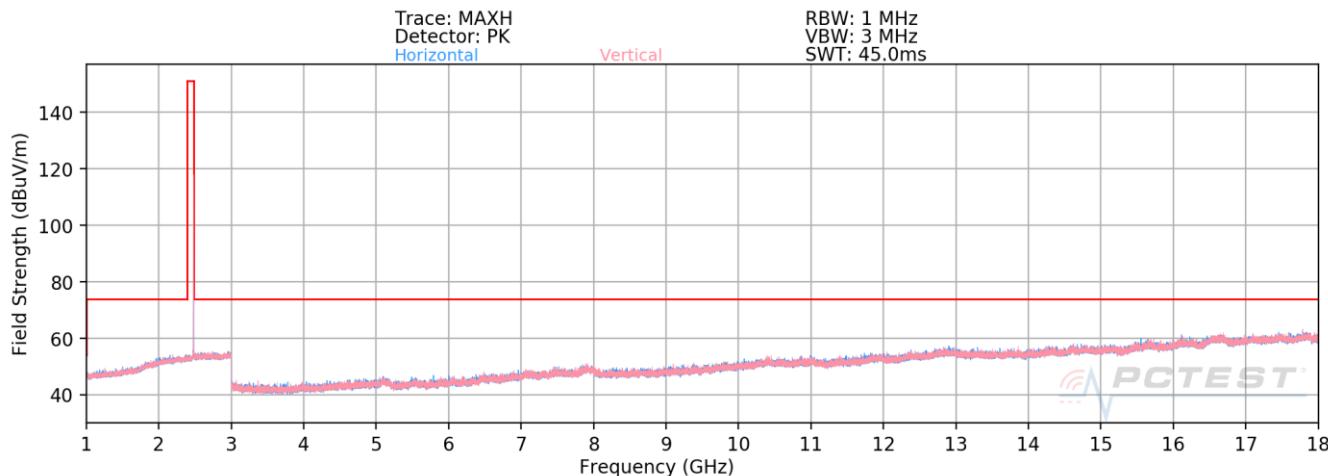

Plot 7-65. Radiated Spurious Emissions above 1GHz TxBF (BT GFSK ePA – Ch. 78)

Worst Case Mode: Bluetooth  
Worst Case Data Rate: 1 Mbps  
Measurement Distance: 3 Meters  
Operating Frequency: 2480MHz  
Channel: 78

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4960.00	Peak	V	257	156	-70.44	9.41	45.97	73.98	-28.01
7440.00	Peak	V	-	-	-72.48	14.77	49.29	73.98	-24.69
12400.00	Peak	V	-	-	-74.98	21.89	53.91	73.98	-20.07


Table 7-21. Radiated Measurements TxBF

FCC ID: BCGA2378 IC: 579C-A2378	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>				Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device			


## Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209; RSS-Gen [8.9]

### TxBF

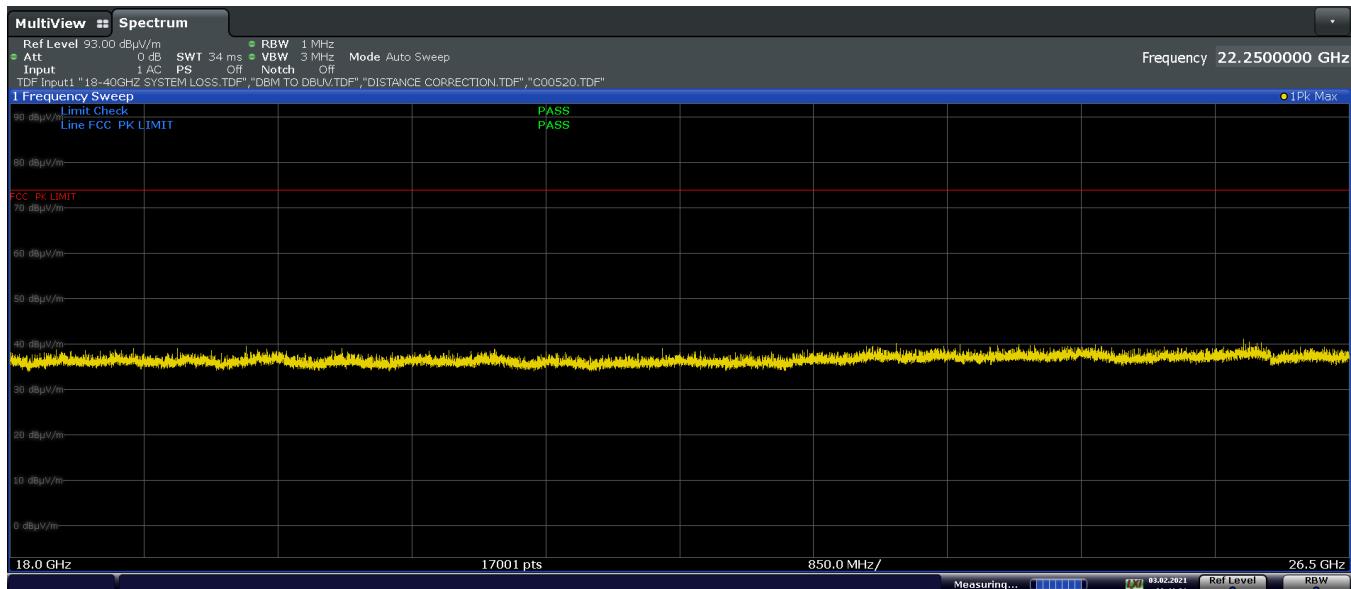

Plot 7-66. Radiated Spurious Emissions above 18GHz TxBF (GFSK ePA – Ch.0, Pol. H)

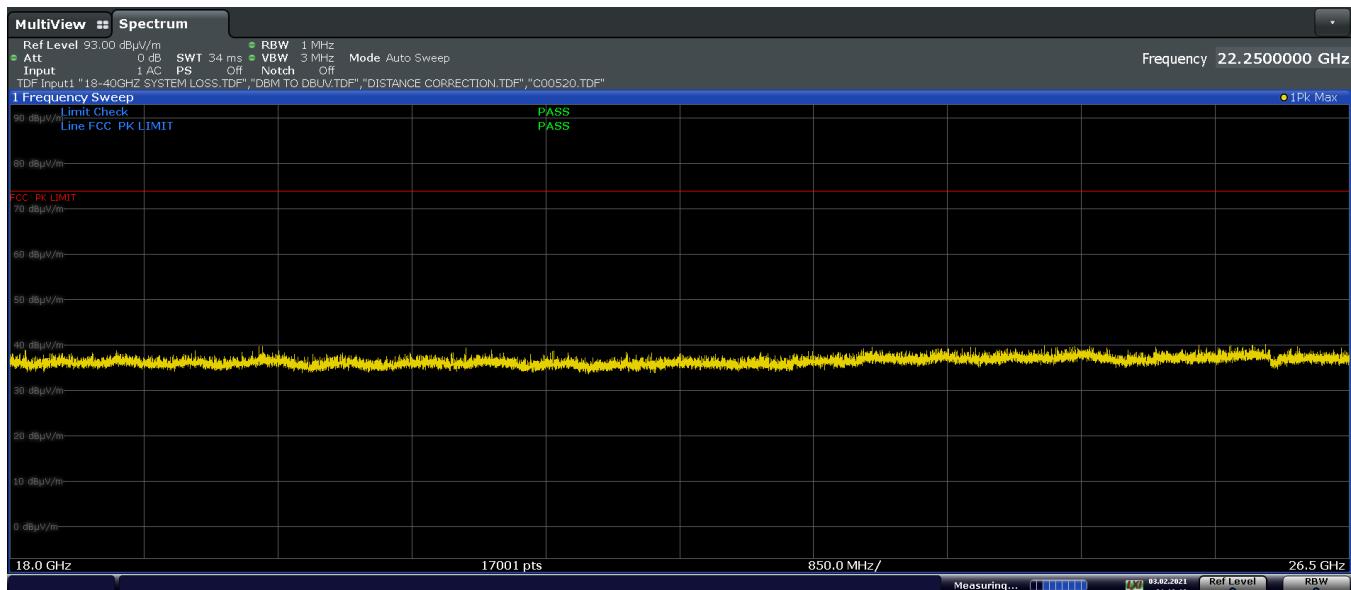

Plot 7-67. Radiated Spurious Emissions above 18GHz TxBF (GFSK ePA – Ch.0, Pol. V)

FCC ID: BCGA2378 IC: 579C-A2378	 <b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device		Page 70 of 91

## 7.10 Radiated Restricted Band Edge Measurements


§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

### Antenna 8

Mode:	Bluetooth-Antenna 8
Modulation:	GFSK
Worst Case Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2402MHz
Channel:	0

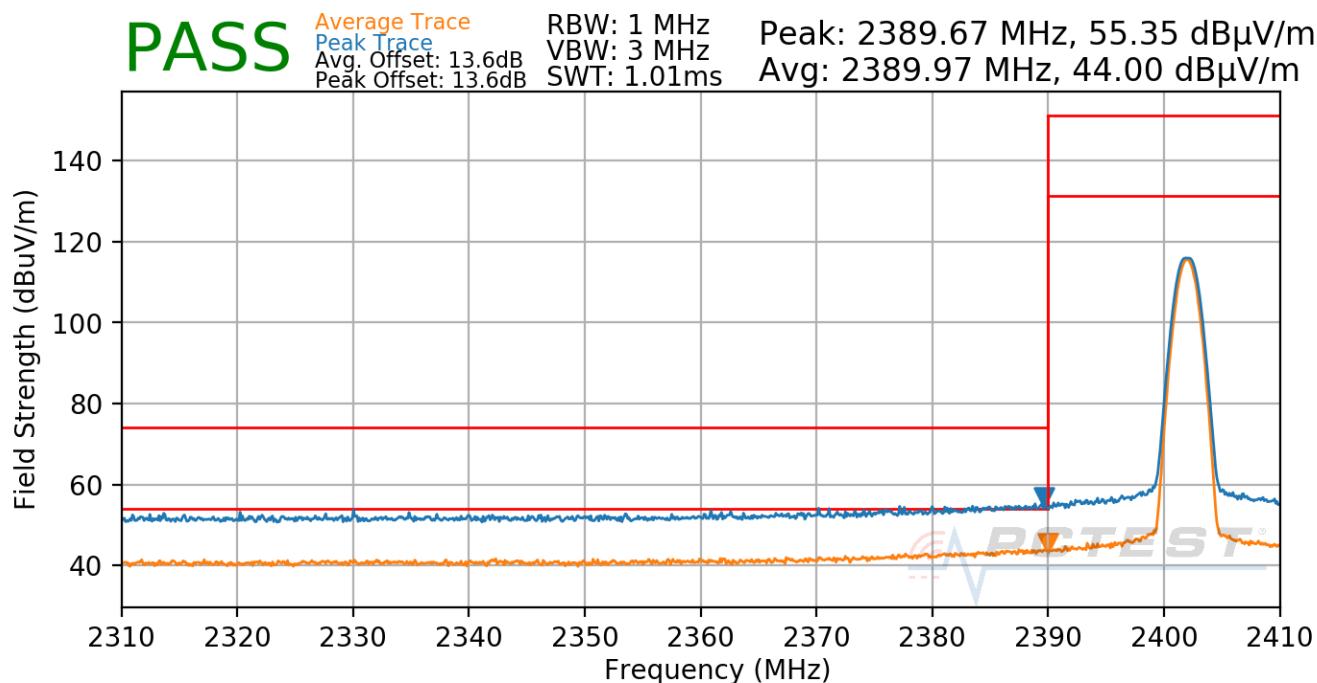

Plot 7-68. Radiated Restricted Lower Band Edge Measurement Antenna 8 (Average & Peak)

FCC ID: BCGA2378 IC: 579C-A2378	 <b>MEASUREMENT REPORT</b> (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 71 of 91


## Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]


The amplitude offset shown in the following plots for average measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

Mode: Bluetooth-Antenna 8  
 Modulation: 8DPSK  
 Worst Case Power Scheme: ePA  
 Measurement Distance: 3 Meters  
 Operating Frequency: 2402MHz  
 Channel: 0

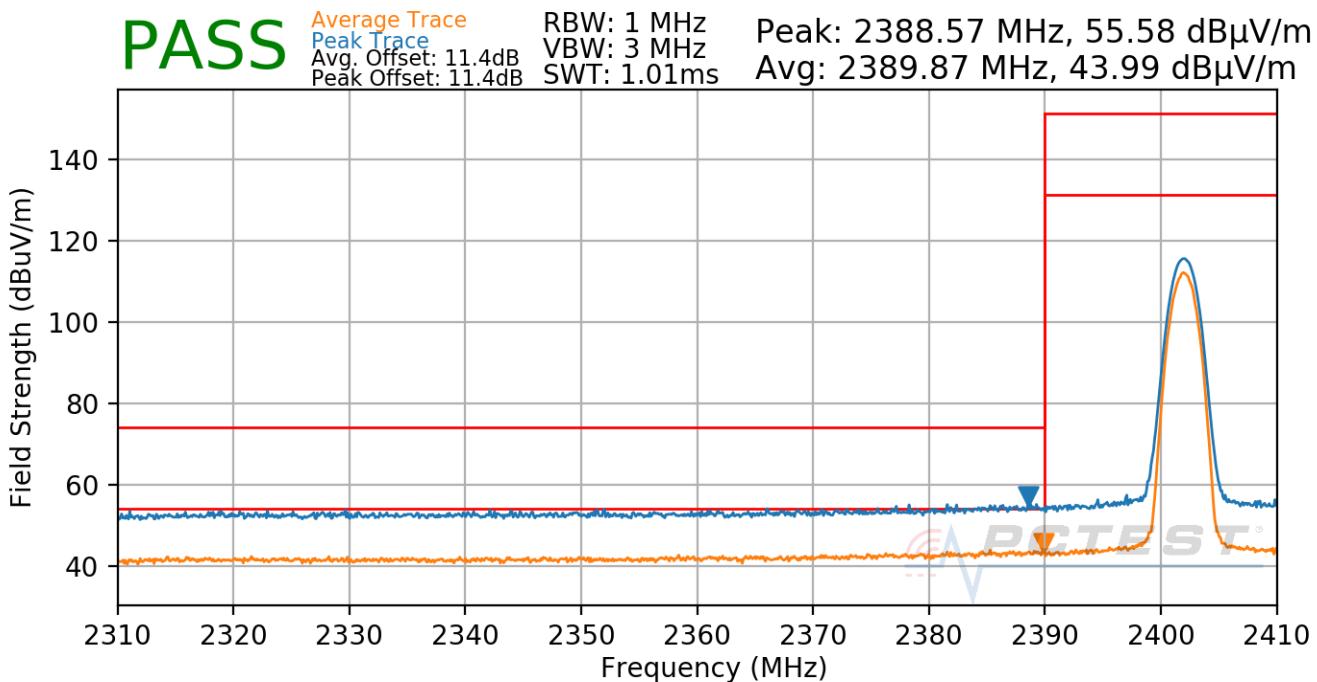

Plot 7-69. Radiated Restricted Lower Band Edge Measurement Antenna 8 (Average & Peak)

FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 72 of 91	


## Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

Mode: Bluetooth-Antenna 8  
 Modulation: GFSK  
 Worst Case Power Scheme: ePA  
 Measurement Distance: 3 Meters  
 Operating Frequency: 2480MHz  
 Channel: 78

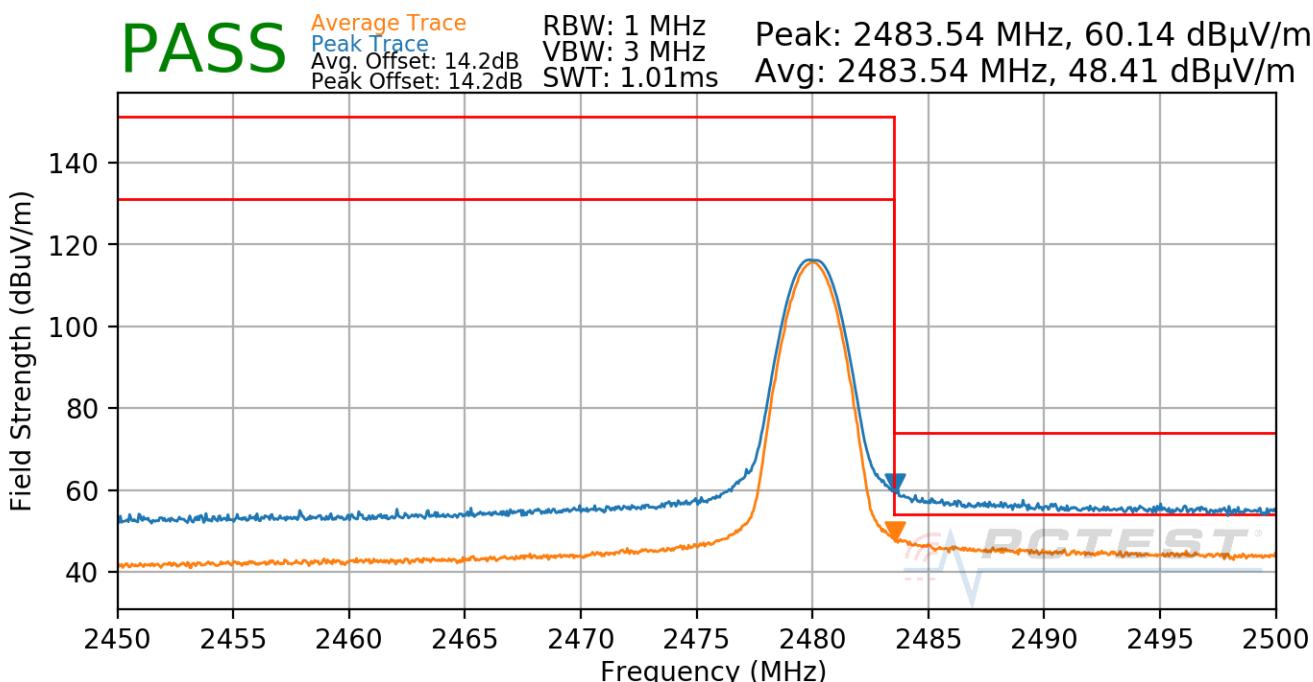

**Plot 7-70. Radiated Restricted Upper Band Edge Measurement Antenna 8 (Average & Peak)**

FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 73 of 91	


## Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

Mode: Bluetooth-Antenna 8  
 Modulation: 8DPSK  
 Worst Case Power Scheme: ePA  
 Measurement Distance: 3 Meters  
 Operating Frequency: 2480MHz  
 Channel: 78

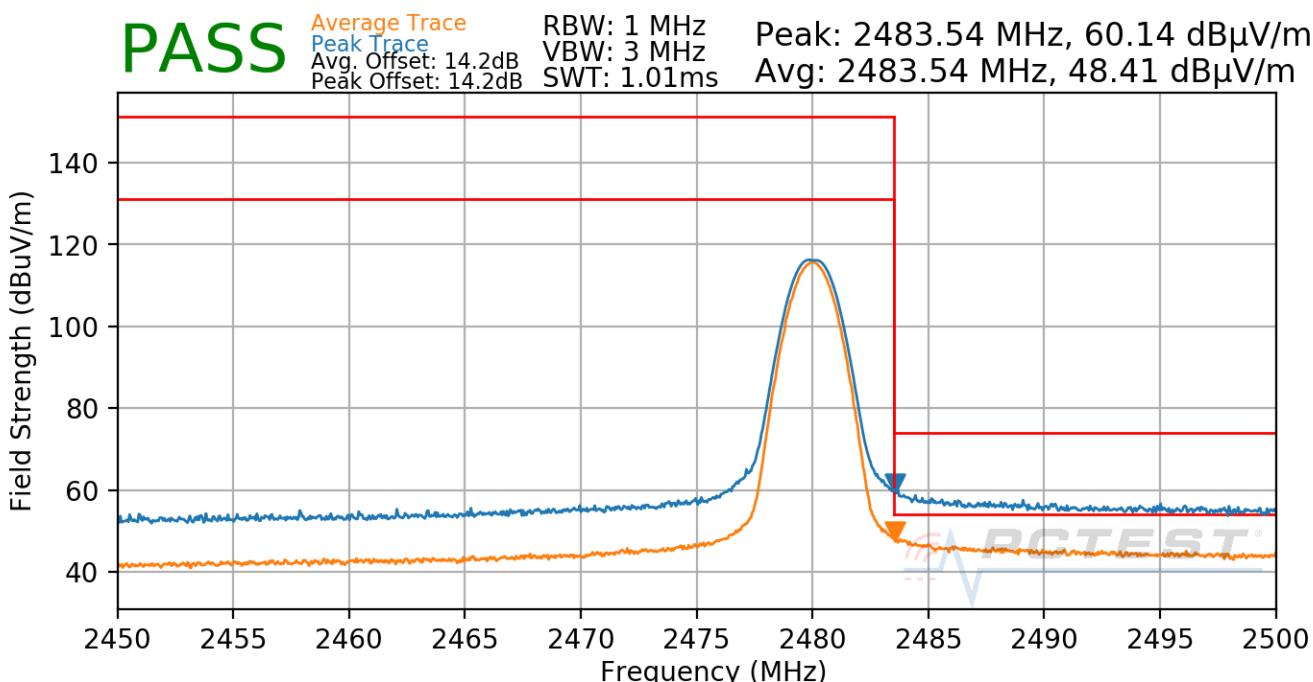

Plot 7-71. Radiated Restricted Upper Band Edge Measurement Antenna 8 (Average & Peak)

FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 74 of 91	

## Radiated Restricted Band Edge Measurements


§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

### Antenna 7

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

Mode:	Bluetooth-Antenna 7
Modulation:	GFSK
Worst Case Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2402MHz
Channel:	0

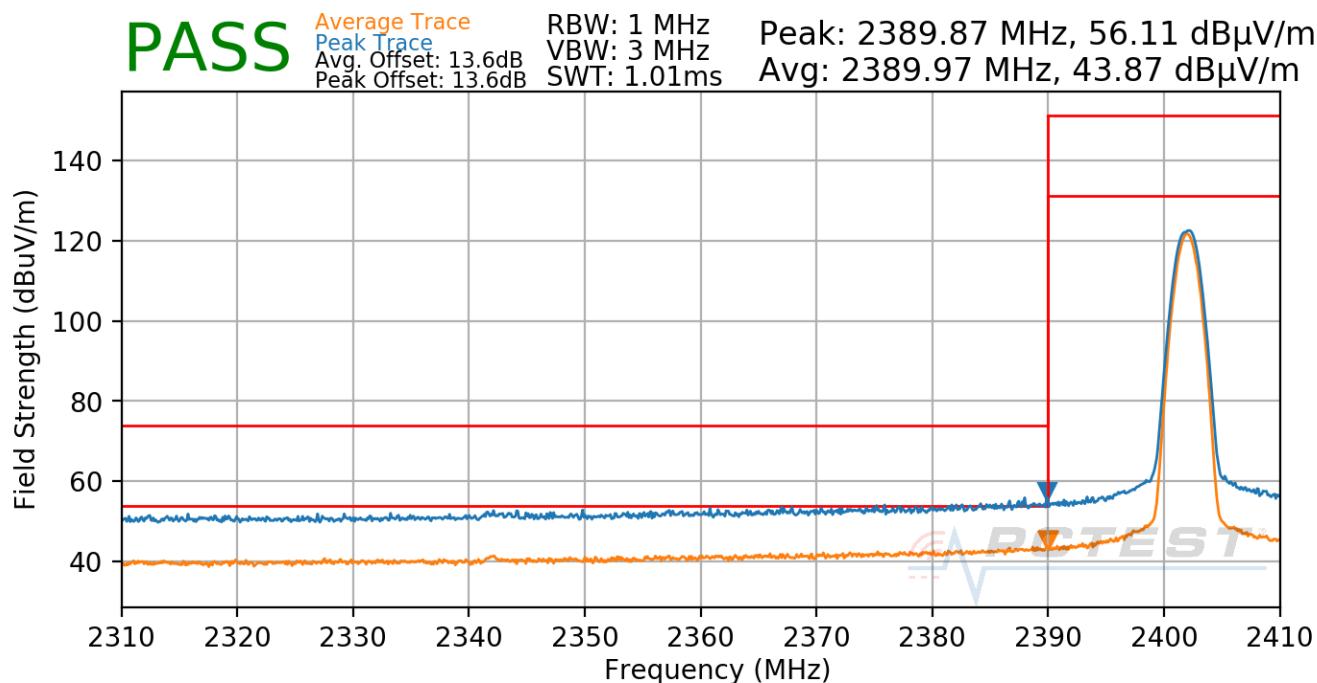

Plot 7-72. Radiated Restricted Lower Band Edge Measurement Antenna 7 (Average & Peak)

FCC ID: BCGA2378 IC: 579C-A2378	 <b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 75 of 91	


## Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

Mode: Bluetooth-Antenna 7  
 Modulation: 8DPSK  
 Worst Case Power Scheme: ePA  
 Measurement Distance: 3 Meters  
 Operating Frequency: 2402MHz  
 Channel: 0

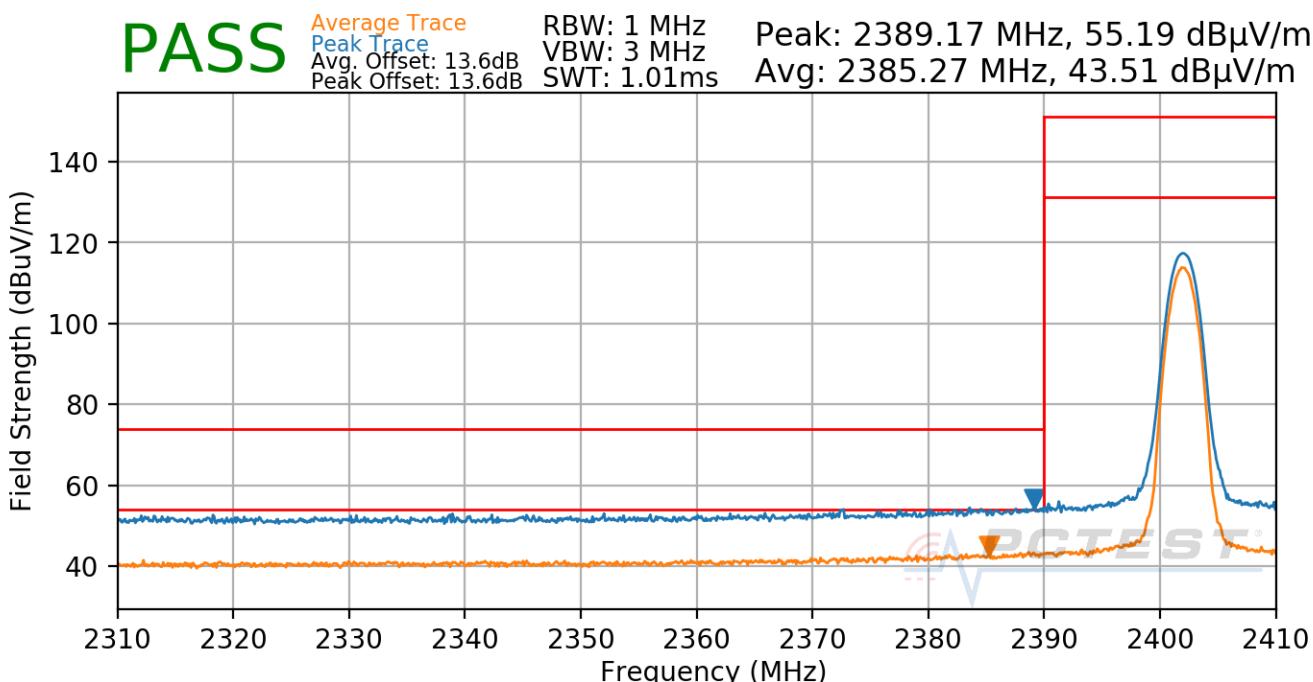

Plot 7-73. Radiated Restricted Lower Band Edge Measurement Antenna 7 (Average & Peak)

FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 76 of 91	


## Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

Mode: Bluetooth-Antenna 7  
Modulation: GFSK  
Worst Case Power Scheme: ePA  
Measurement Distance: 3 Meters  
Operating Frequency: 2480MHz  
Channel: 78

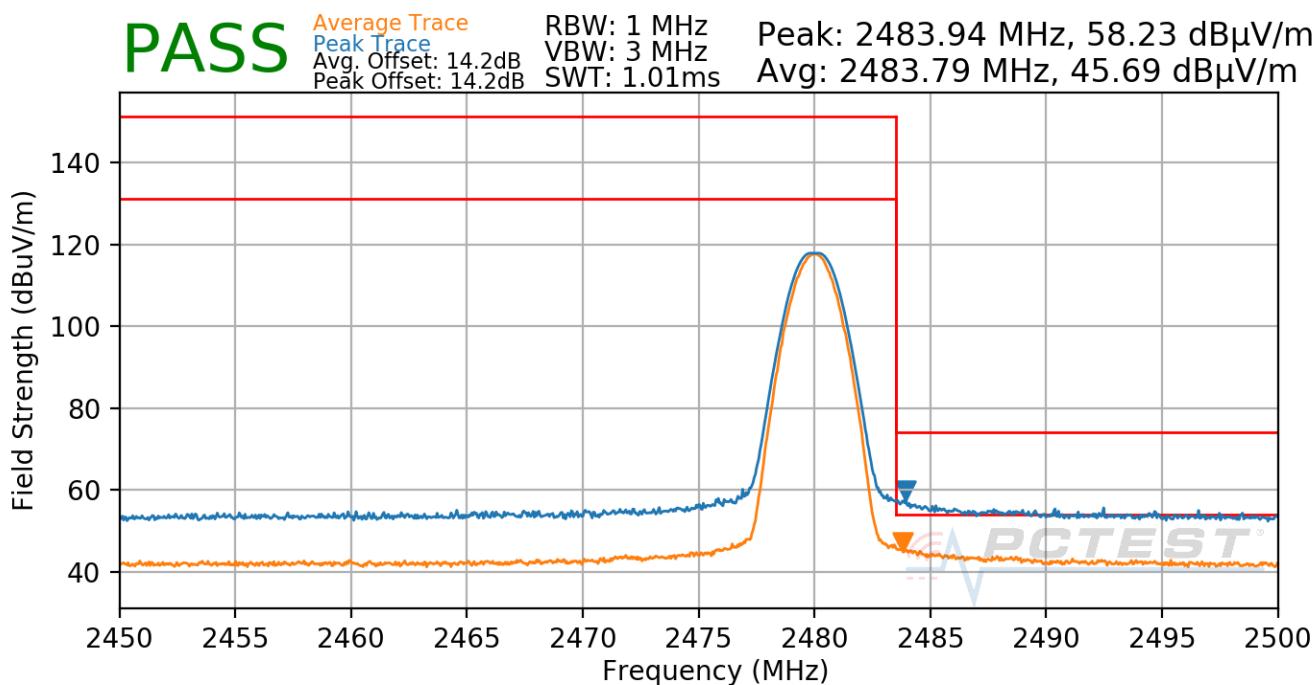

**Plot 7-74. Radiated Restricted Upper Band Edge Measurement Antenna 7 (Average & Peak)**

FCC ID: BCGA2378 IC: 579C-A2378	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 77 of 91


## Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

Mode: Bluetooth-Antenna 7  
 Modulation: 8DPSK  
 Worst Case Power Scheme: ePA  
 Measurement Distance: 3 Meters  
 Operating Frequency: 2480MHz  
 Channel: 78

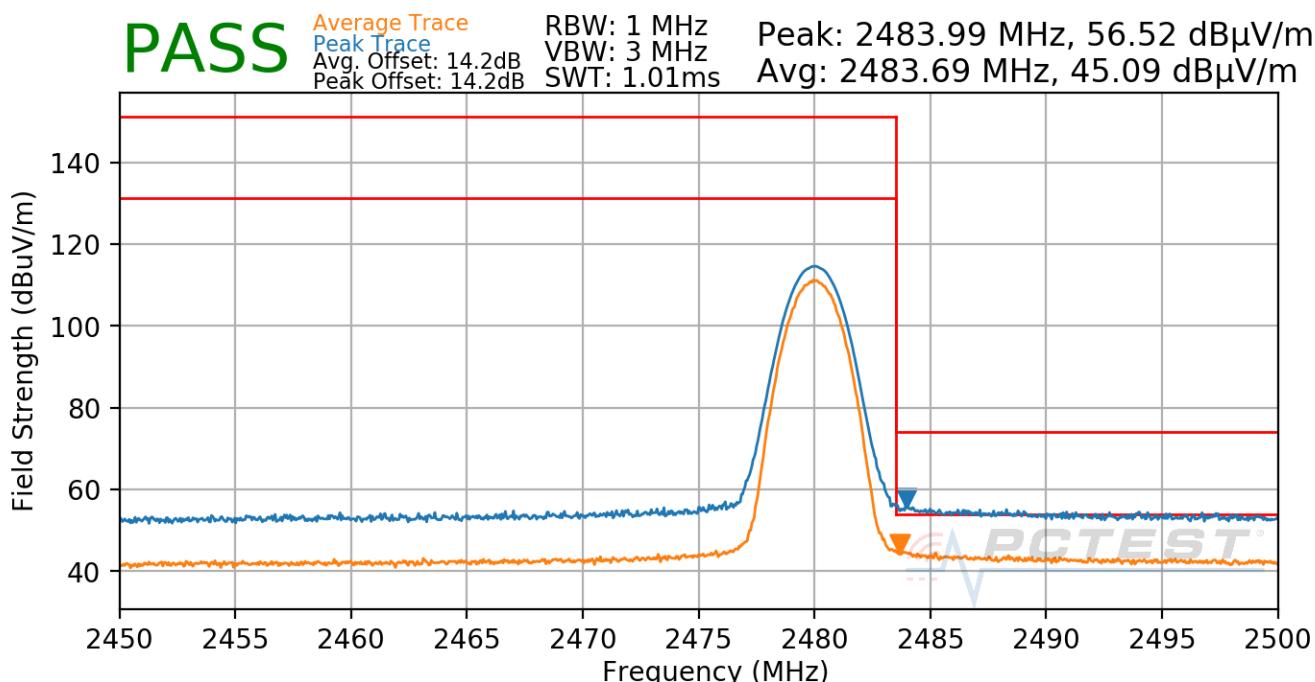

**Plot 7-75. Radiated Restricted Upper Band Edge Measurement Antenna 7 (Average & Peak)**

FCC ID: BCGA2378 IC: 579C-A2378	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 78 of 91

## Radiated Restricted Band Edge Measurements


§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

### TxBF

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

Mode:	Bluetooth-TxBF
Modulation:	GFSK
Worst Case Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2402MHz
Channel:	0

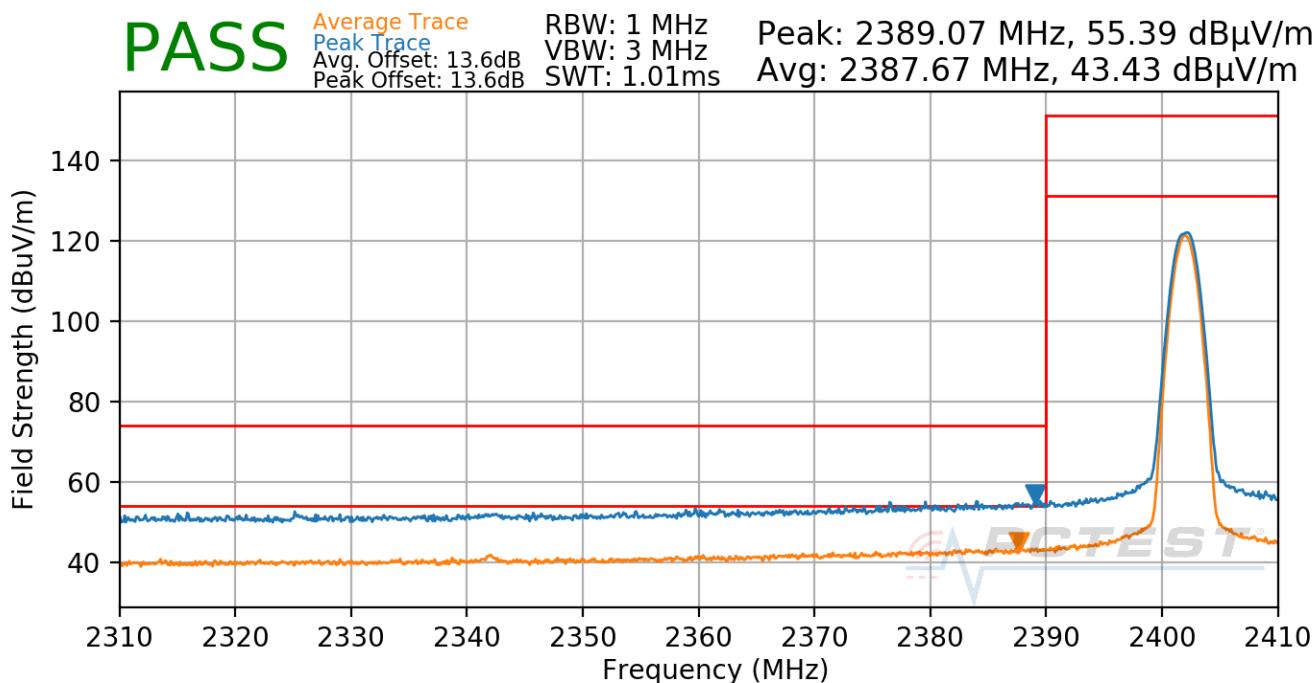

Plot 7-76. Radiated Restricted Lower Band Edge Measurement TxBF (Average & Peak)

FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 79 of 91	


## Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

Mode: Bluetooth-TxBF  
 Modulation: 8DPSK  
 Worst Case Power Scheme: ePA  
 Measurement Distance: 3 Meters  
 Operating Frequency: 2402MHz  
 Channel: 0

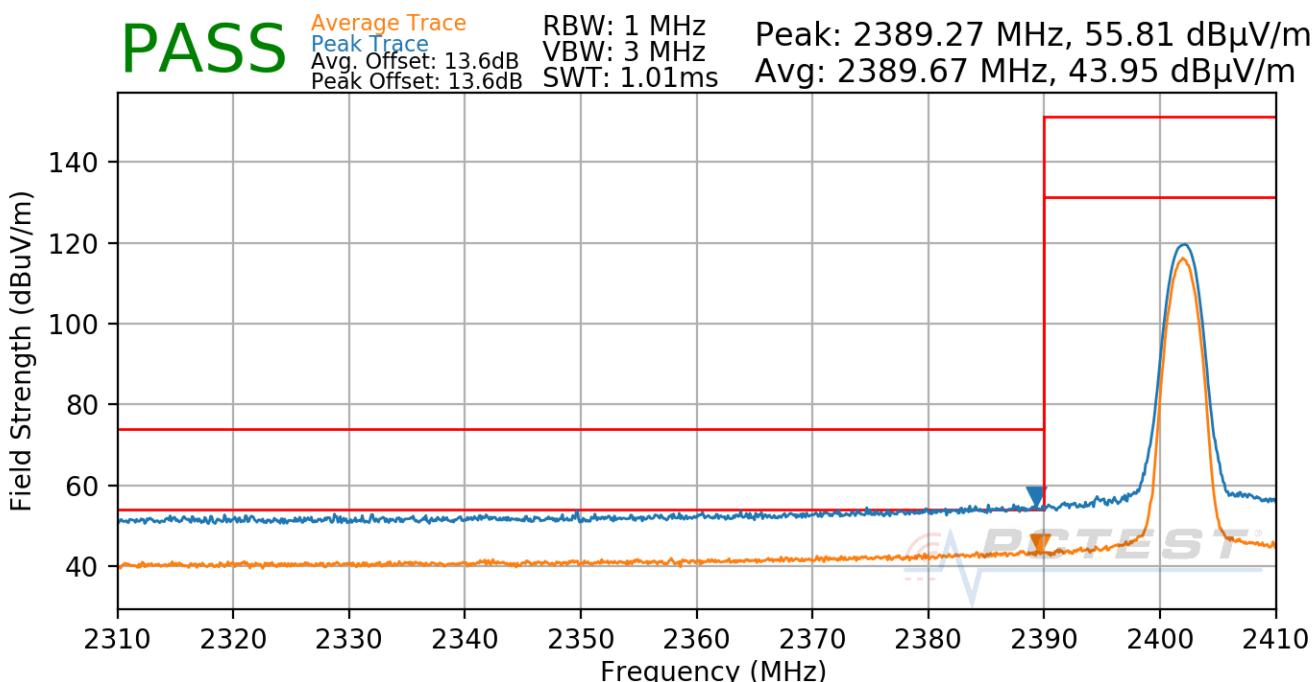

Plot 7-77. Radiated Restricted Lower Band Edge Measurement TxBF (Average & Peak)

FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 80 of 91	


## Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

Mode: Bluetooth-TxBF  
 Modulation: GFSK  
 Worst Case Power Scheme: ePA  
 Measurement Distance: 3 Meters  
 Operating Frequency: 2480MHz  
 Channel: 78

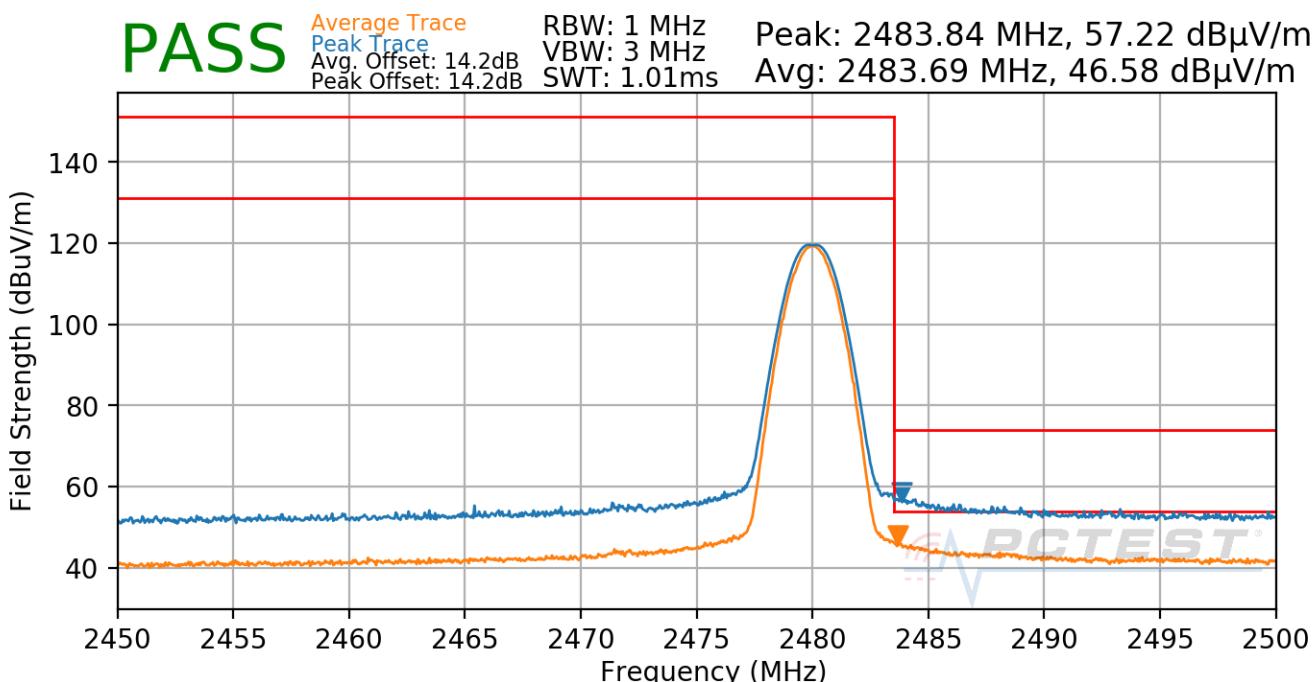

Plot 7-78. Radiated Restricted Upper Band Edge Measurement TxBF (Average & Peak)

FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 81 of 91


## Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

Mode: Bluetooth-TxBF  
 Modulation: 8DPSK  
 Worst Case Power Scheme: ePA  
 Measurement Distance: 3 Meters  
 Operating Frequency: 2480MHz  
 Channel: 78

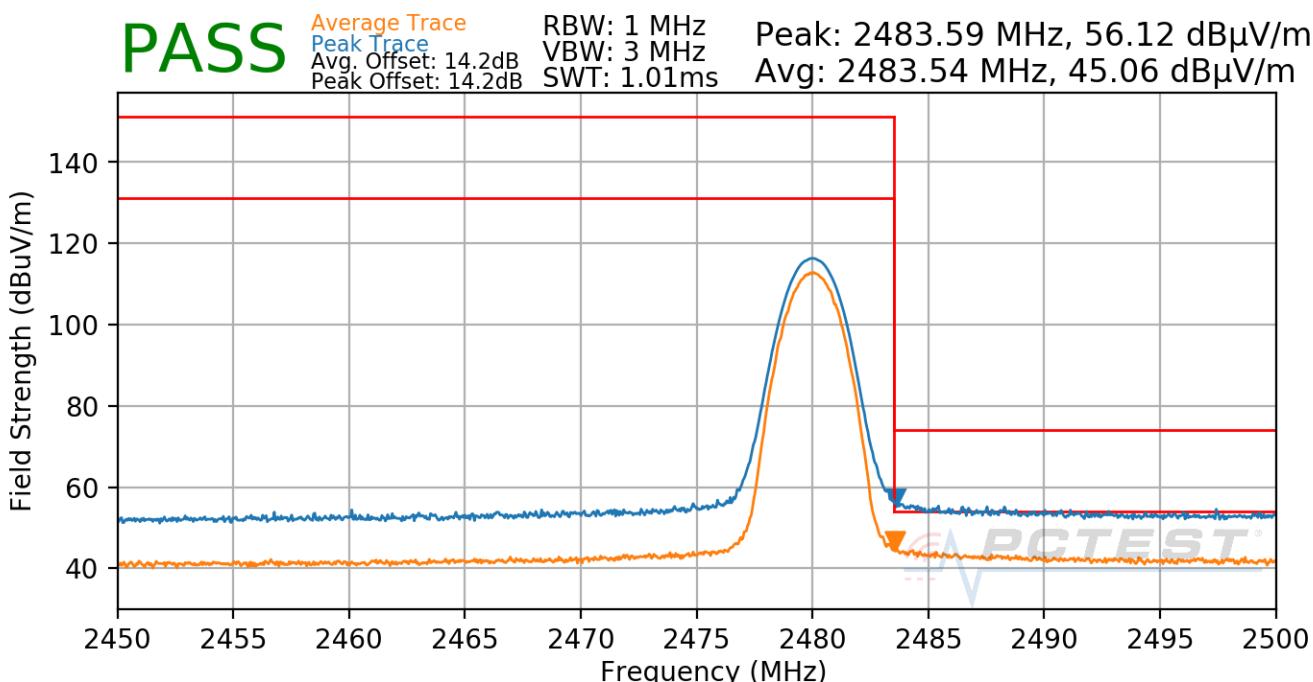

Plot 7-79. Radiated Restricted Upper Band Edge Measurement TxBF (Average & Peak)

FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 82 of 91	

## 7.11 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-22 per Section 15.209 and RSS-Gen (8.9).***

Frequency	Field Strength [ $\mu$ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

**Table 7-22. Radiated Limits**

### Test Procedures Used

ANSI C63.10-2013

### Test Settings

#### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


#### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


FCC ID: BCGA2378 IC: 579C-A2378	 <b>PCTEST®</b> <small>Proud to be part of element</small>		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device		Page 83 of 91

## Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

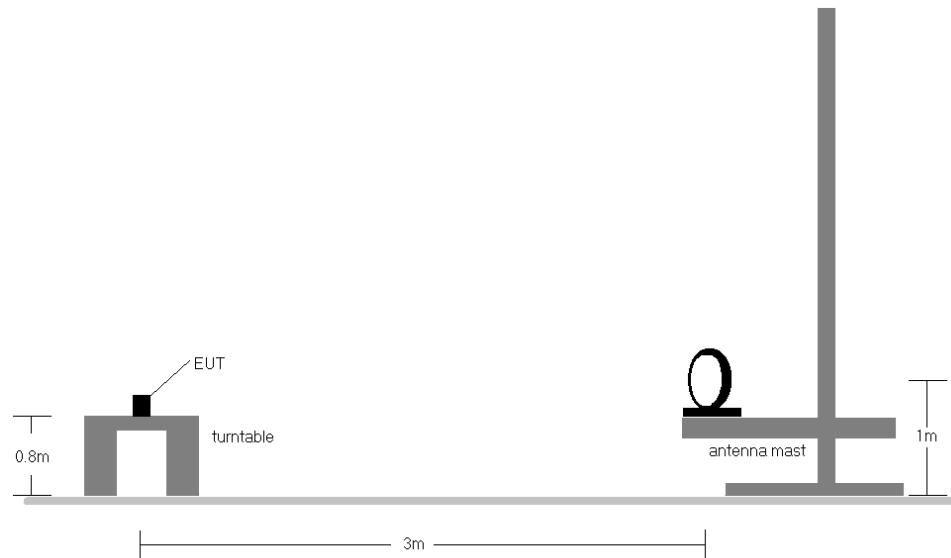

**Figure 7-9. Radiated Test Setup < 30Mhz**

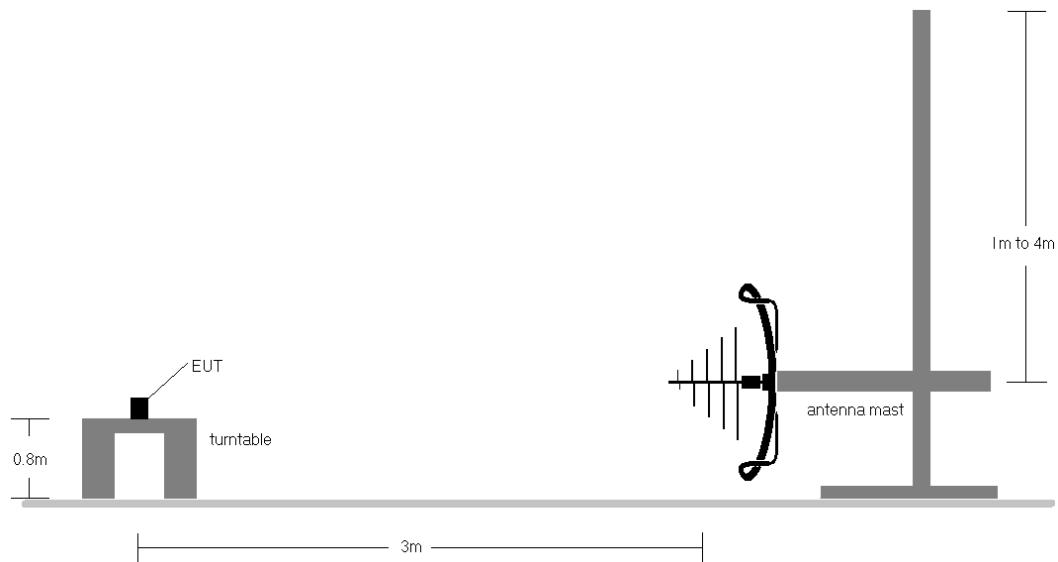

**Figure 7-10. Radiated Test Setup < 1GHz**

FCC ID: BCGA2378 IC: 579C-A2378	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 84 of 91

## Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-22.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. Both configurations below were investigated, and the worst case has been reported.
  - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
  - b. EUT powered by host PC via USB-C cable with wire charger
10. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.


## Sample Calculation

- Field Strength Level [ $\text{dB}_{\mu\text{V/m}}$ ] = Analyzer Level [ $\text{dBm}$ ] + 107 + AFCL [ $\text{dB/m}$ ]
- AFCL [ $\text{dB/m}$ ] = Antenna Factor [ $\text{dB/m}$ ] + Cable Loss [ $\text{dB}$ ] – Preamplifier Gain [ $\text{dB}$ ]
- Margin [ $\text{dB}$ ] = Field Strength Level [ $\text{dB}_{\mu\text{V/m}}$ ] – Limit [ $\text{dB}_{\mu\text{V/m}}$ ]

FCC ID: BCGA2378 IC: 579C-A2378	 <b>PCTEST</b> <small>Proud to be part of element</small>		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 85 of 91	

## TxBF Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

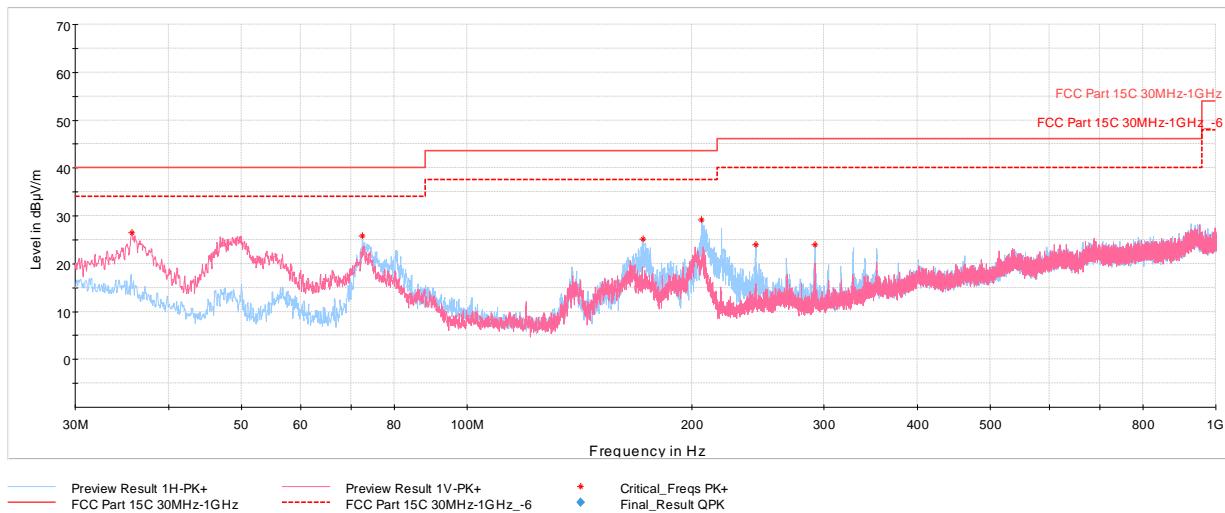

**Plot 7-80. Radiated Spurious Emissions below 1GHz TxBF (GFSK ePA – Ch.0, with AC/DC Adapter)**

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
35.72	Peak	V	100	0	-65.93	-14.65	26.42	40.00	-13.58
72.53	Peak	H	250	146	-60.62	-20.60	25.78	40.00	-14.22
171.96	Peak	H	100	255	-64.68	-17.26	25.06	43.52	-18.46
205.96	Peak	H	100	284	-61.23	-16.58	29.19	43.52	-14.33
243.01	Peak	H	100	289	-68.00	-15.03	23.97	46.02	-22.05
291.51	Peak	H	100	316	-68.23	-14.83	23.94	46.02	-22.08

**Table 7-23. Radiated Spurious Emissions Below 1GHz TxBF (GFSK ePA – Ch.0 with AC/DC Adapter)**

FCC ID: BCGA2378 IC: 579C-A2378	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 86 of 91	

## 7.12 AC Line-Conducted Emissions Measurement

§15.207; RSS-Gen [8.8]

### Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

***All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).***

Frequency of emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

**Table 7-24. Conducted Limits**

\*Decreases with the logarithm of the frequency.

### Test Procedures Used

ANSI C63.10-2013, Section 6.2

### Test Settings

#### Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


#### Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA2378 IC: 579C-A2378	 <b>PCTEST®</b> <small>Proud to be part of element</small>		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device		Page 87 of 91

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

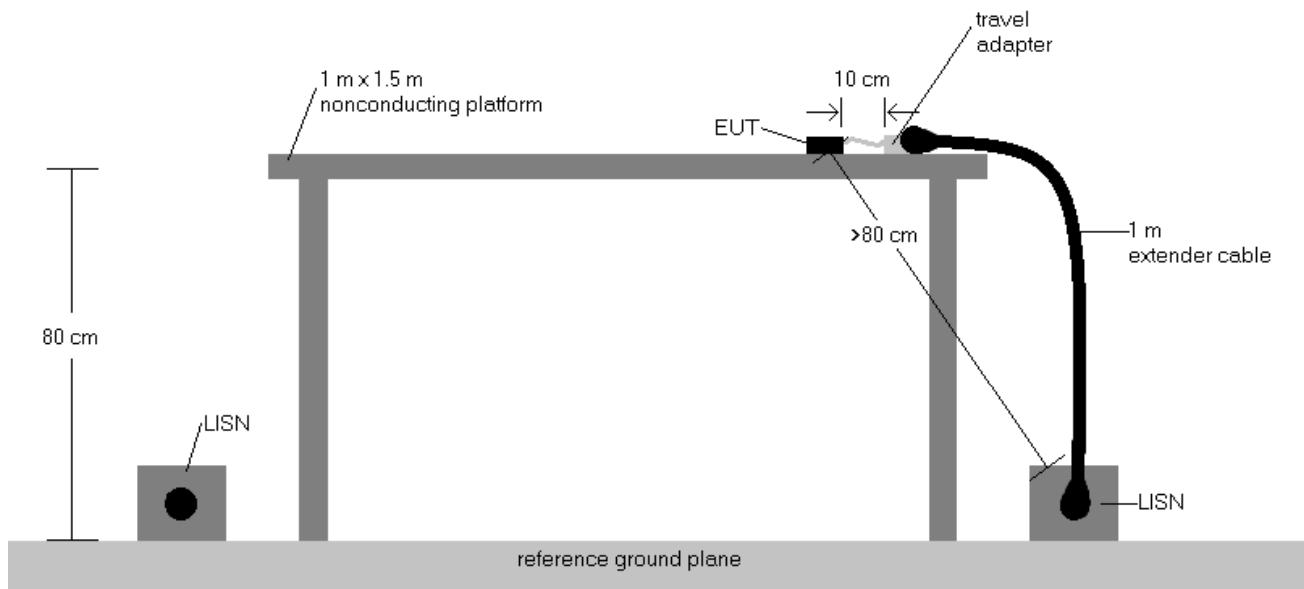


**Figure 7-11. Test Instrument & Measurement Setup**

## Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen (8.8).
3. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
4. QP/AV Level (dB $\mu$ V) = QP/AV Analyzer/Receiver Level (dB $\mu$ V) + Correction Factor (dB)
5. Margin (dB) = QP/AV Level (dB $\mu$ V) - QP/AV Limit (dB $\mu$ V)
6. Traces shown in plot are made using a quasi peak and average detectors.
7. Deviations to the Specifications: None.
8. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.
9. Both configurations below were investigated, and the worst case has been reported.
  - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
  - b. EUT powered by host PC via USB-C cable with wire charger

FCC ID: BCGA2378 IC: 579C-A2378	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 88 of 91

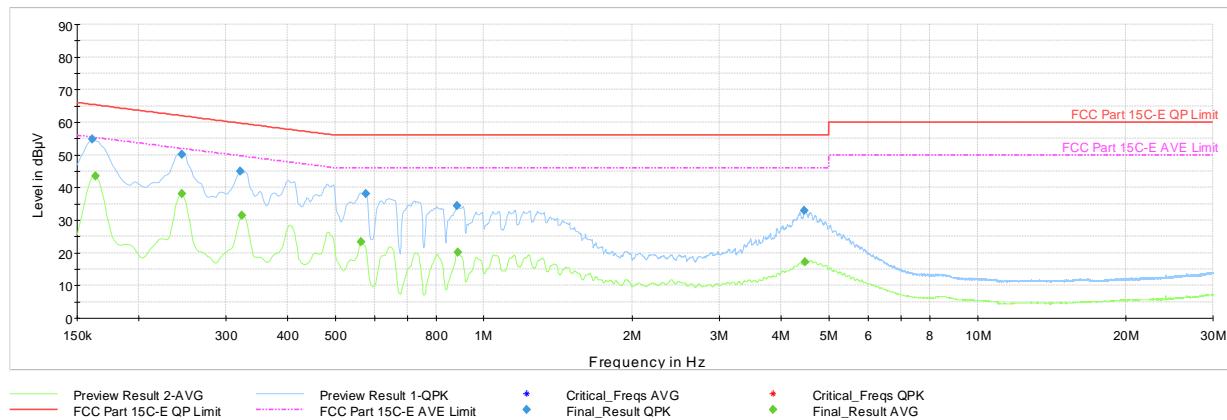


**Plot 7-81. AC Line-Conducted Test Plot TxBF (L1, GFSK ePA – Ch.0, with AC/DC Adapter)**

Frequency [MHz]	Process State	QuasiPeak [dB $\mu$ V]	Average [dB $\mu$ V]	Limit [dB $\mu$ V]	Margin [dB]	Line	PE
0.161	FINAL	54.8	—	65.40	-10.62	L1	GND
0.164	FINAL	—	43.47	55.28	-11.81	L1	GND
0.245	FINAL	50.1	—	61.94	-11.86	L1	GND
0.245	FINAL	—	38.04	51.94	-13.90	L1	GND
0.321	FINAL	45.1	—	59.68	-14.63	L1	GND
0.323	FINAL	—	31.48	49.62	-18.14	L1	GND
0.564	FINAL	—	23.48	46.00	-22.52	L1	GND
0.578	FINAL	38.2	—	56.00	-17.79	L1	GND
0.884	FINAL	34.4	—	56.00	-21.64	L1	GND
0.886	FINAL	—	20.13	46.00	-25.87	L1	GND
4.466	FINAL	33.0	—	56.00	-22.96	L1	GND
4.475	FINAL	—	17.30	46.00	-28.70	L1	GND

**Table 7-25. AC Line-Conducted Test Data TxBF (L1, GFSK ePA – Ch.0, with AC/DC Adapter)**

FCC ID: BCGA2378 IC: 579C-A2378	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 89 of 91	

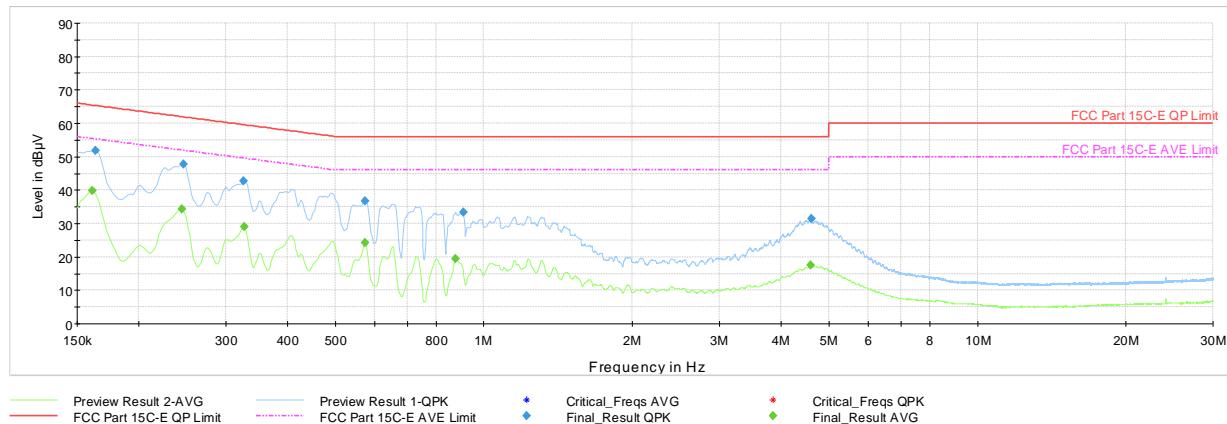

**Plot 7-82. AC Line-Conducted Test Plot TxBF (N, GFSK ePA – Ch.0, with AC/DC Adapter)**

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.161	FINAL	—	39.95	55.40	-15.45	N	GND
0.164	FINAL	51.8	—	65.28	-13.44	N	GND
0.245	FINAL	—	34.41	51.94	-17.53	N	GND
0.247	FINAL	47.8	—	61.87	-14.05	N	GND
0.326	FINAL	42.6	—	59.57	-16.94	N	GND
0.328	FINAL	—	29.03	49.51	-20.48	N	GND
0.575	FINAL	—	24.18	46.00	-21.82	N	GND
0.575	FINAL	36.8	—	56.00	-19.21	N	GND
0.877	FINAL	—	19.52	46.00	-26.48	N	GND
0.908	FINAL	33.3	—	56.00	-22.73	N	GND
4.585	FINAL	—	17.51	46.00	-28.49	N	GND
4.603	FINAL	31.4	—	56.00	-24.61	N	GND

**Table 7-26. AC Line-Conducted Test Data TxBF (N, GFSK ePA – Ch.0, with AC/DC Adapter)**

FCC ID: BCGA2378 IC: 579C-A2378	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 90 of 91

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Apple Tablet Device** **FCC ID: BCGA2378 and IC: 579C-A2378** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA2378 IC: 579C-A2378	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C2101020004-06.BCG	Test Dates: 12/15/2020-2/25/2021	EUT Type: Tablet Device	Page 91 of 91