



Plot 7-67. Channel Edge Plot (LTE Band 48 - 20MHz QPSK - Mid Channel)

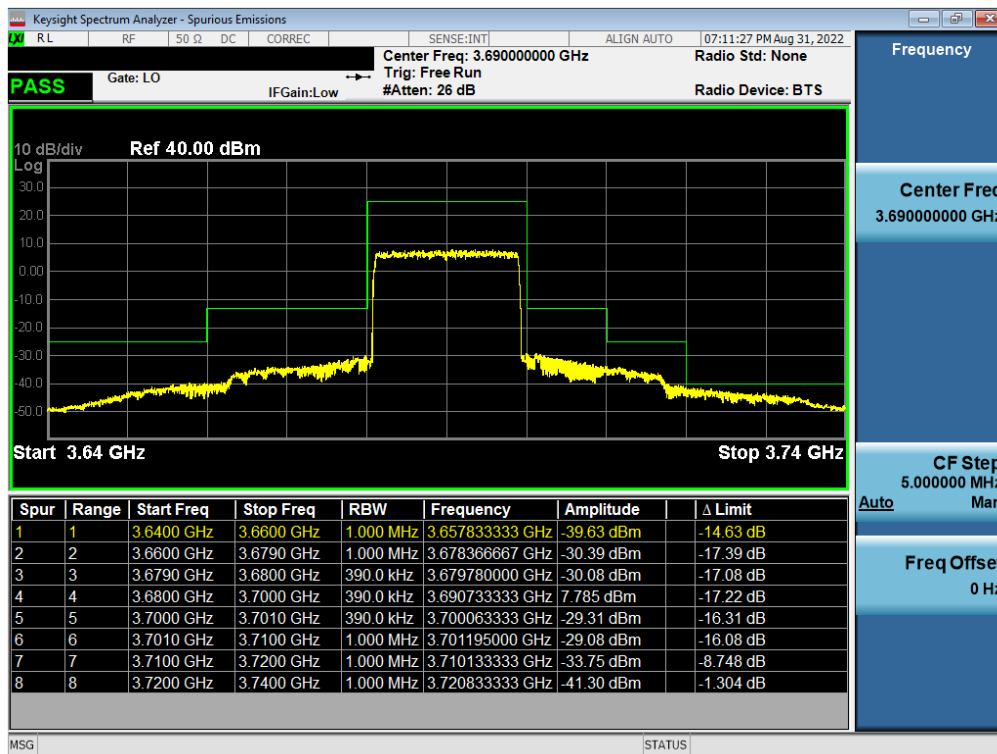


Plot 7-68. Channel Edge Plot (LTE Band 48 - 20MHz QPSK - High Channel)

FCC ID: BCGA2435	element	PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 51 of 94

## ULCA LTE Band 48

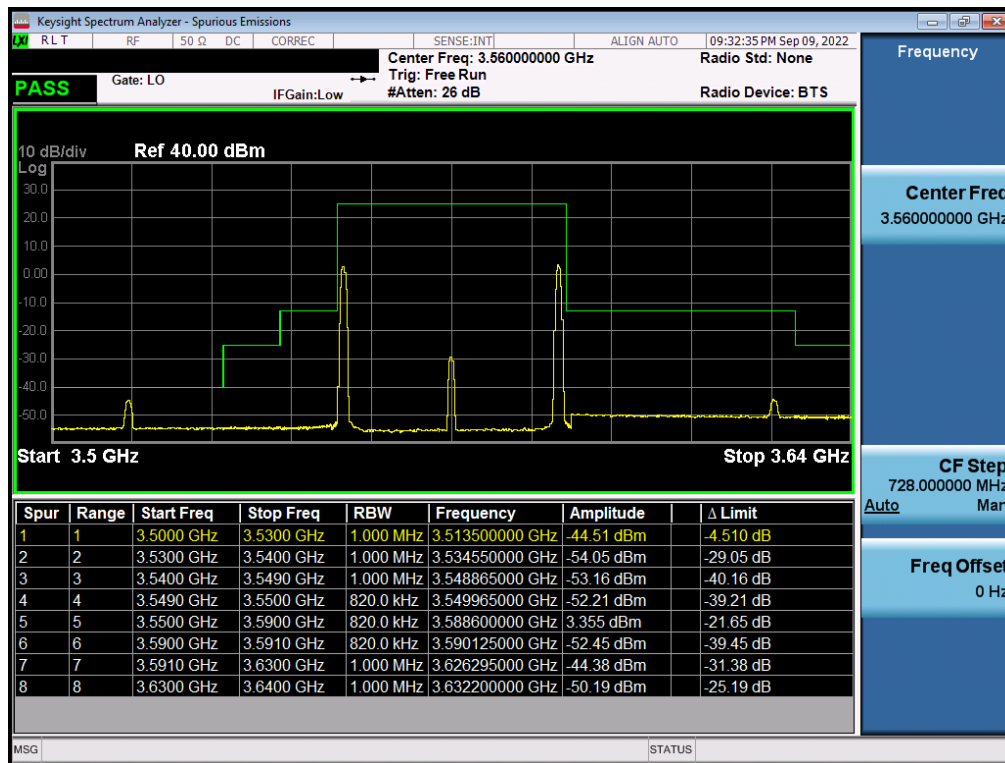


Plot 7-69. Channel Edge Plot (ULCA Band 48 – 20+20MHz QPSK - Low Channel)

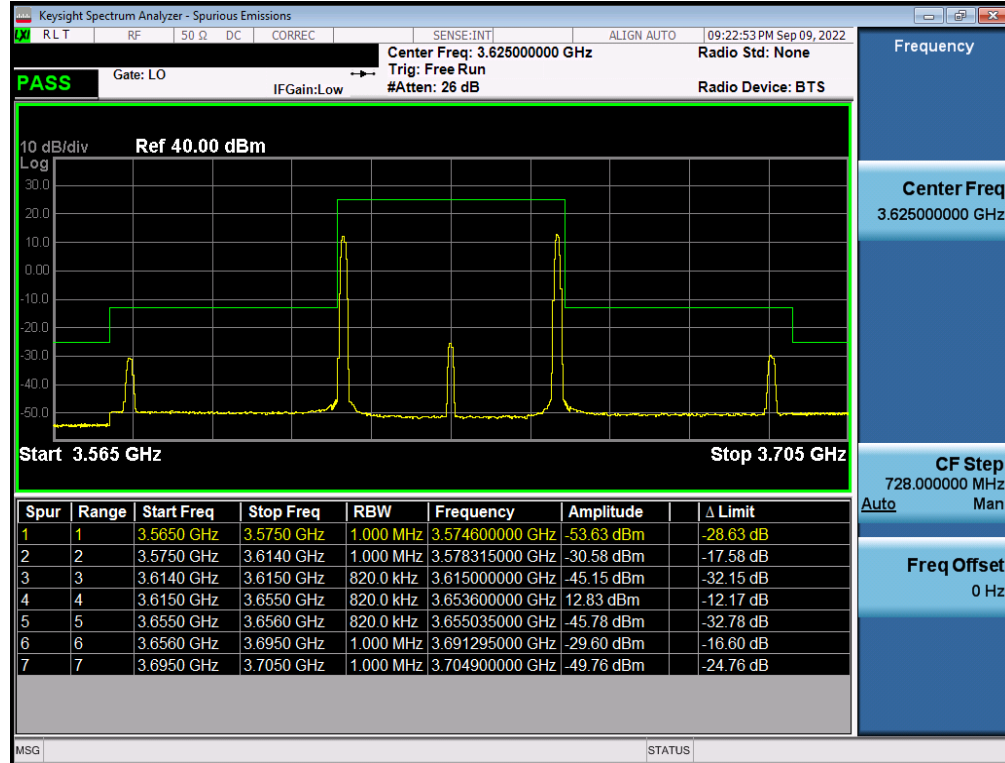

Plot 7-70. Channel Edge Plot (ULCA Band 48 – 20+20MHz QPSK - Mid Channel)

FCC ID: BCGA2435	PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device
		Page 52 of 94

V2.1 11/9/2021

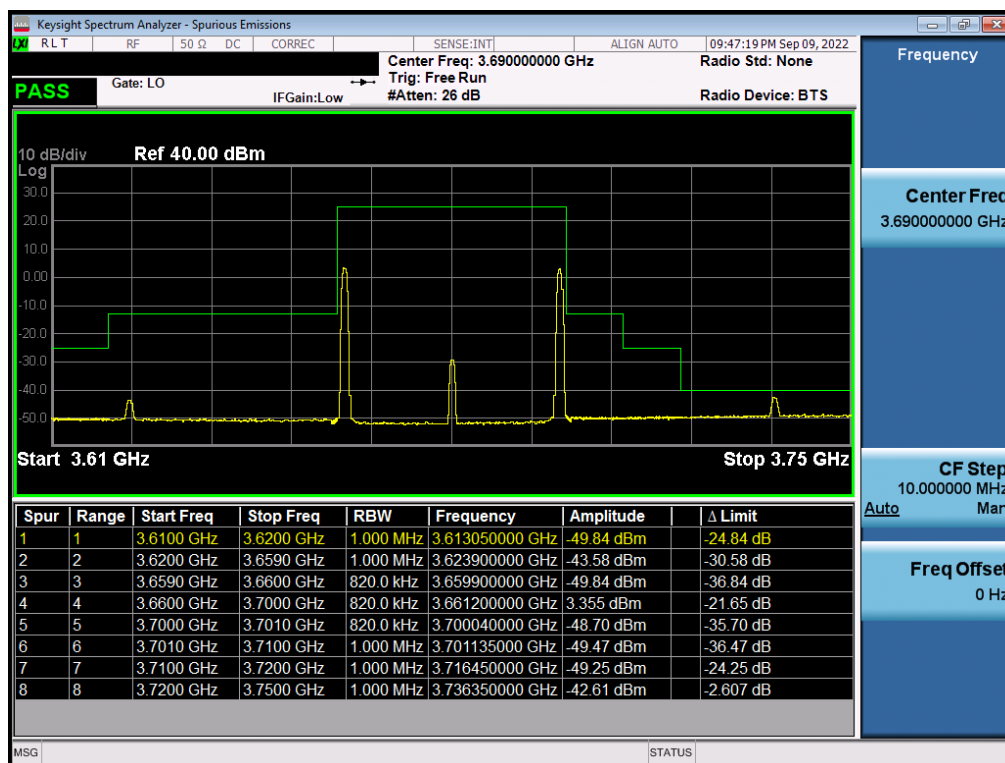

Plot 7-71. Channel Edge Plot (ULCA Band 48 – 20+20MHz QPSK - High Channel)

FCC ID: BCGA2435	element	PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 53 of 94

V2.1 11/9/2021

## 7.5 Peak-Average Ratio

\$96.41(g):

### Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. All ports were tested and only the worst case data were reported.

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 5.7.1

### Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW  $\geq$  OBW or specified reference bandwidth
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

### Test Setup


The EUT and measurement equipment were set up as shown in the diagram below.

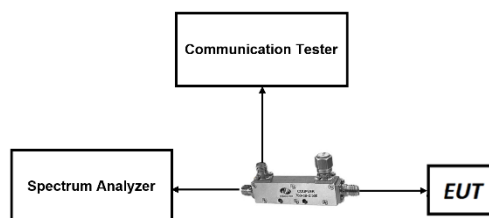

**Figure 7-4. Test Instrument & Measurement Setup**

### Test Notes


None.

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 54 of 94


V2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).


## LTE Band 48

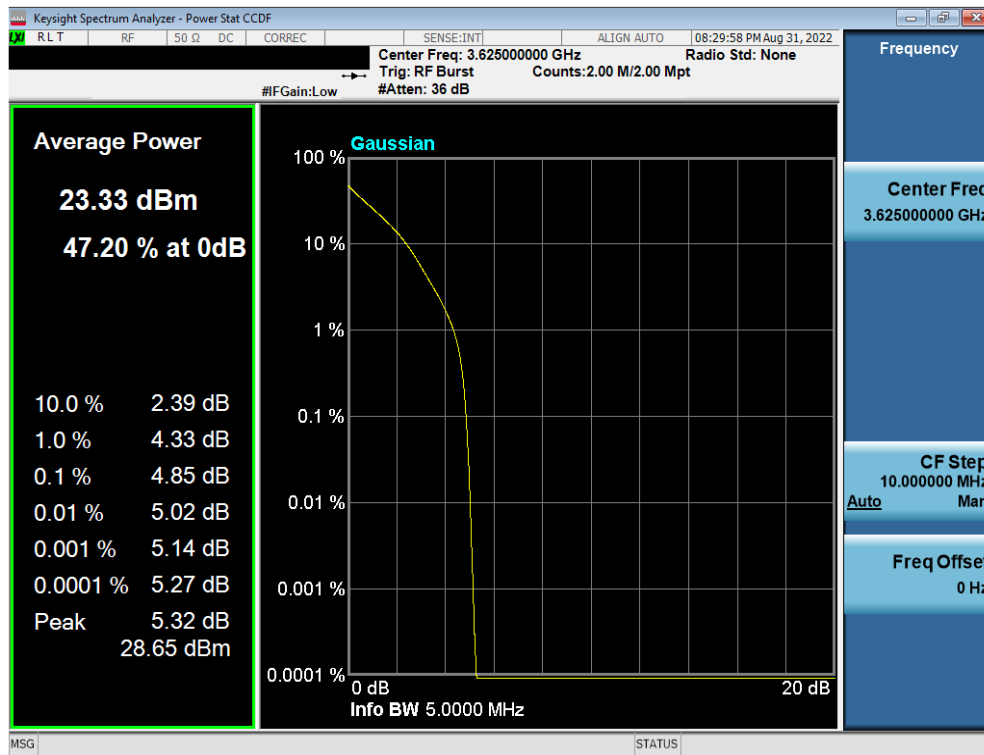


Plot 7-72. PAR Plot (LTE Band 48 - 5MHz QPSK - Full RB)

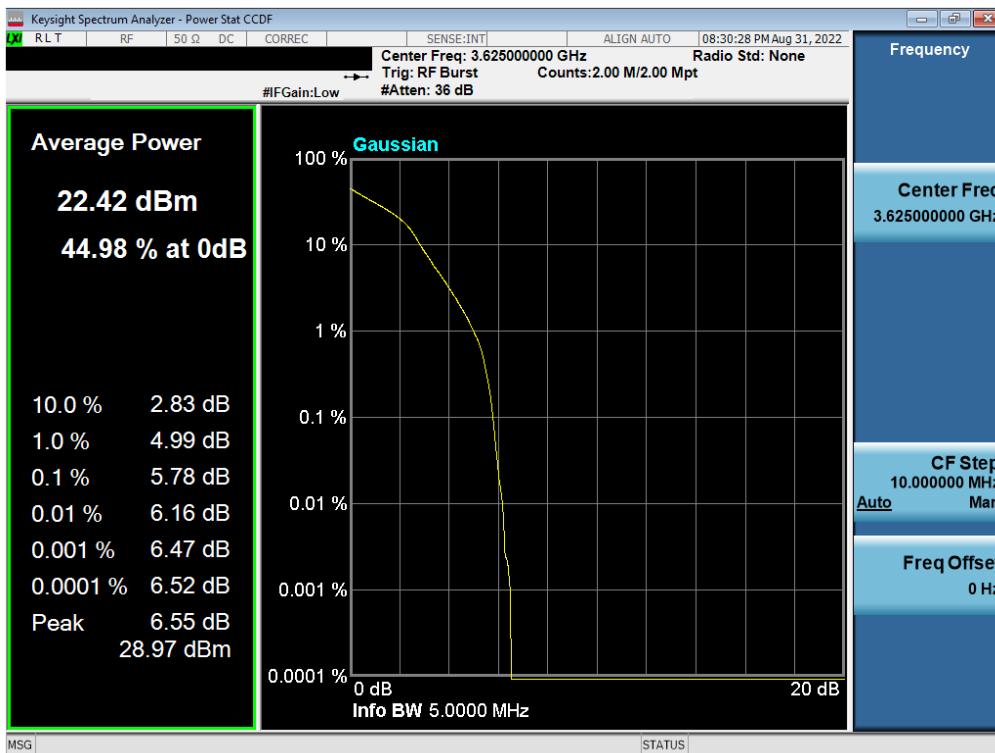


Plot 7-73. PAR Plot (LTE Band 48 - 5MHz 16-QAM - Full RB)

FCC ID: BCGA2435	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device
		Page 55 of 94

V2.1 11/9/2021

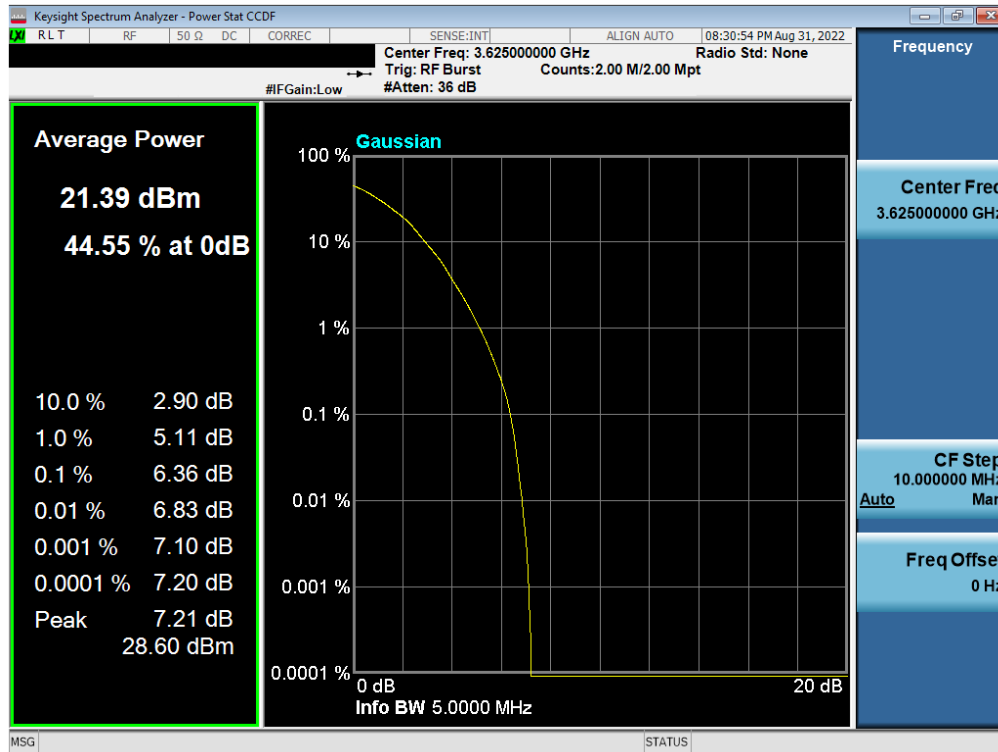


Plot 7-74. PAR Plot (LTE Band 48 - 5MHz 64-QAM - Full RB)

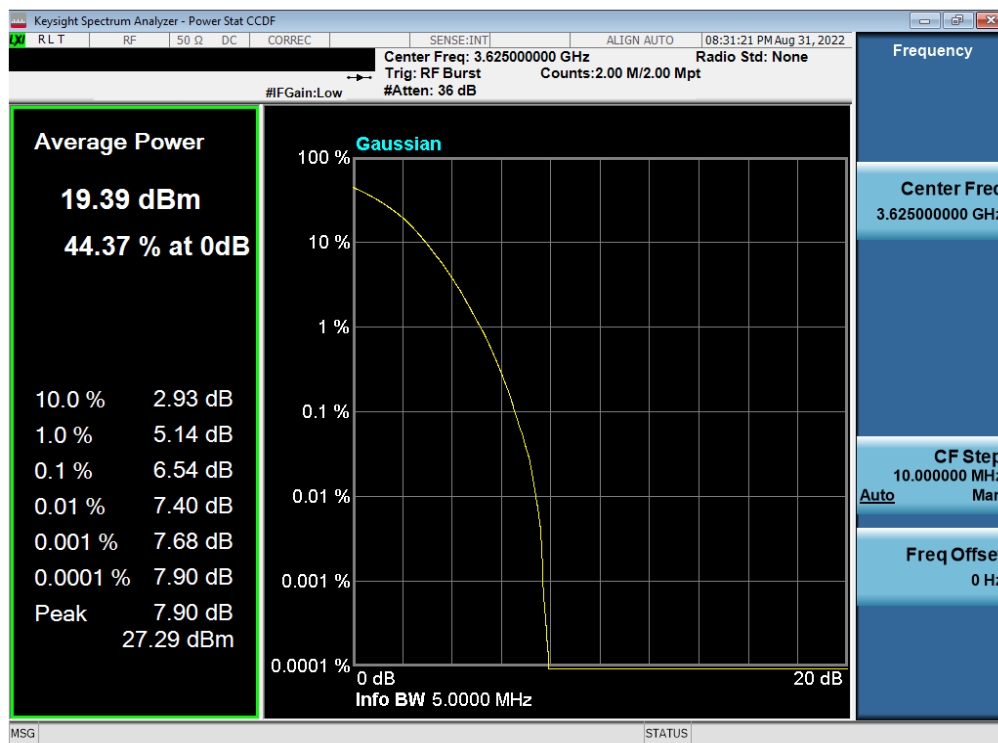


Plot 7-75. PAR Plot (LTE Band 48 - 5MHz 256-QAM - Full RB)

FCC ID: BCGA2435	element	PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 56 of 94


V2.1 11/9/2021

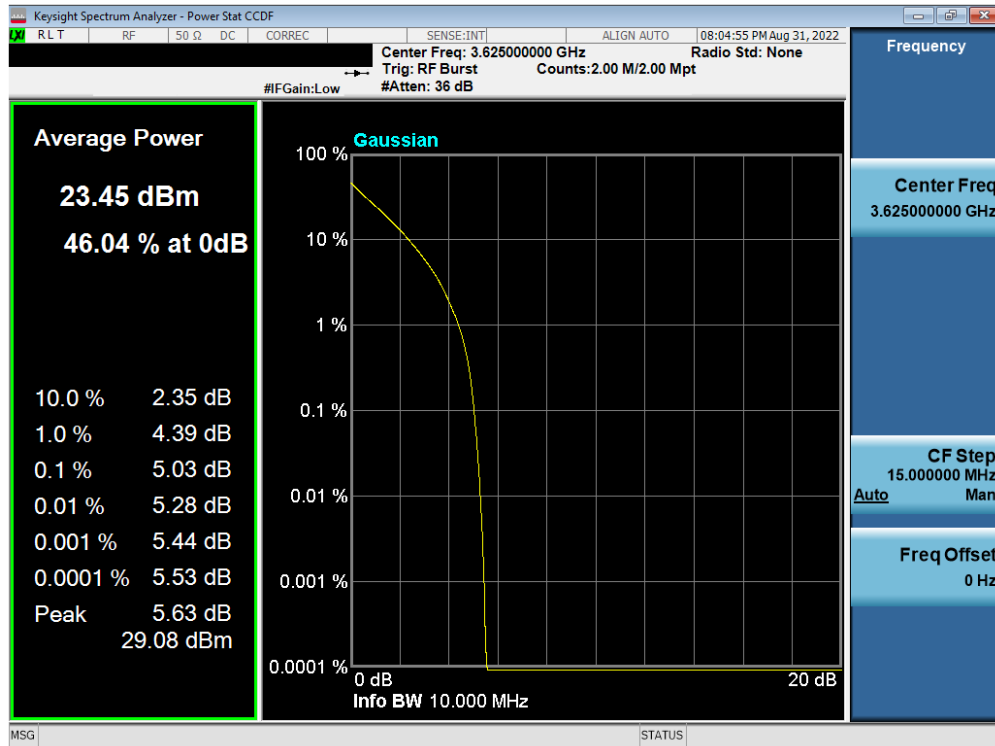


Plot 7-76. PAR Plot (LTE Band 48 - 10MHz QPSK - Full RB)

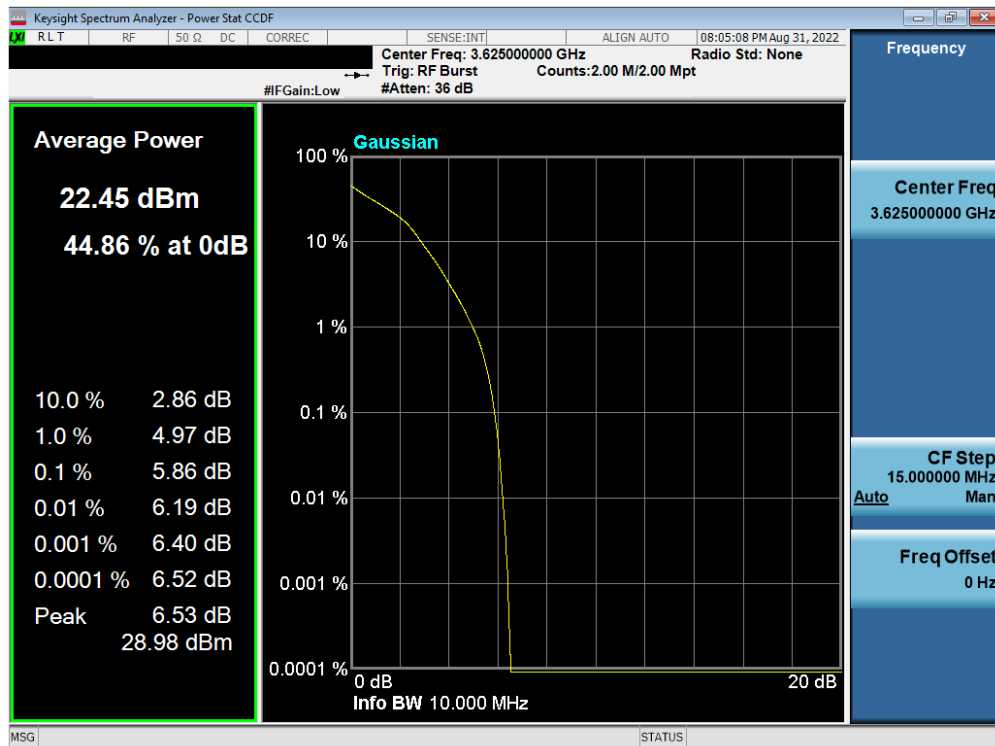


Plot 7-77. PAR Plot (LTE Band 48 - 10MHz 16-QAM - Full RB)

FCC ID: BCGA2435	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device
		Page 57 of 94

V2.1 11/9/2021

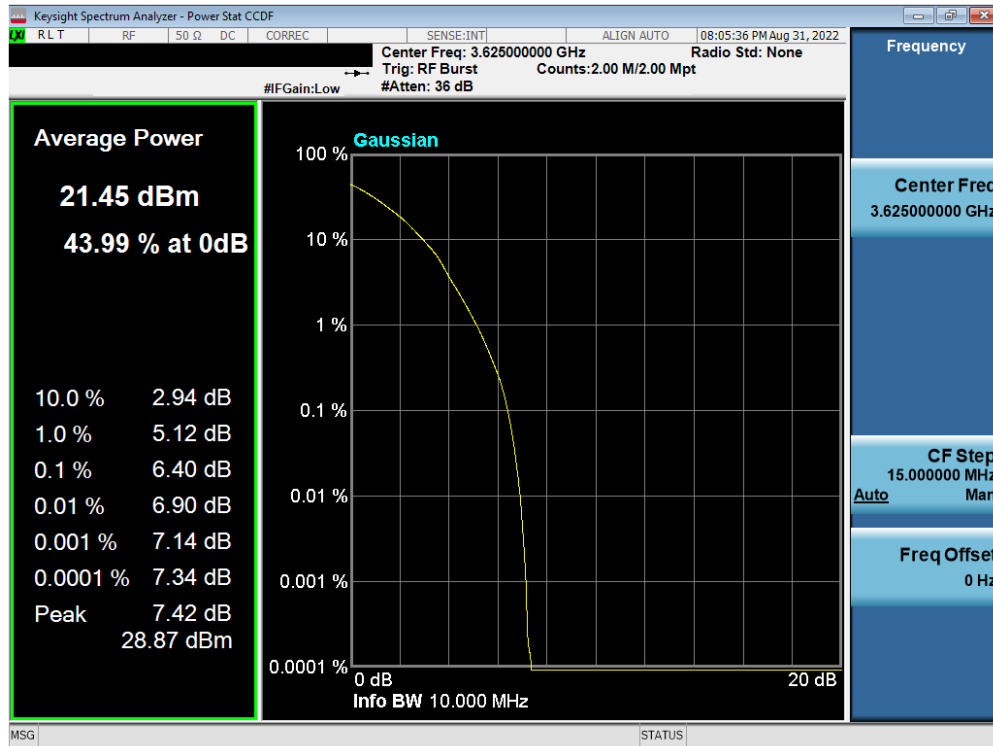


Plot 7-78. PAR Plot (LTE Band 48 - 10MHz 64-QAM - Full RB)

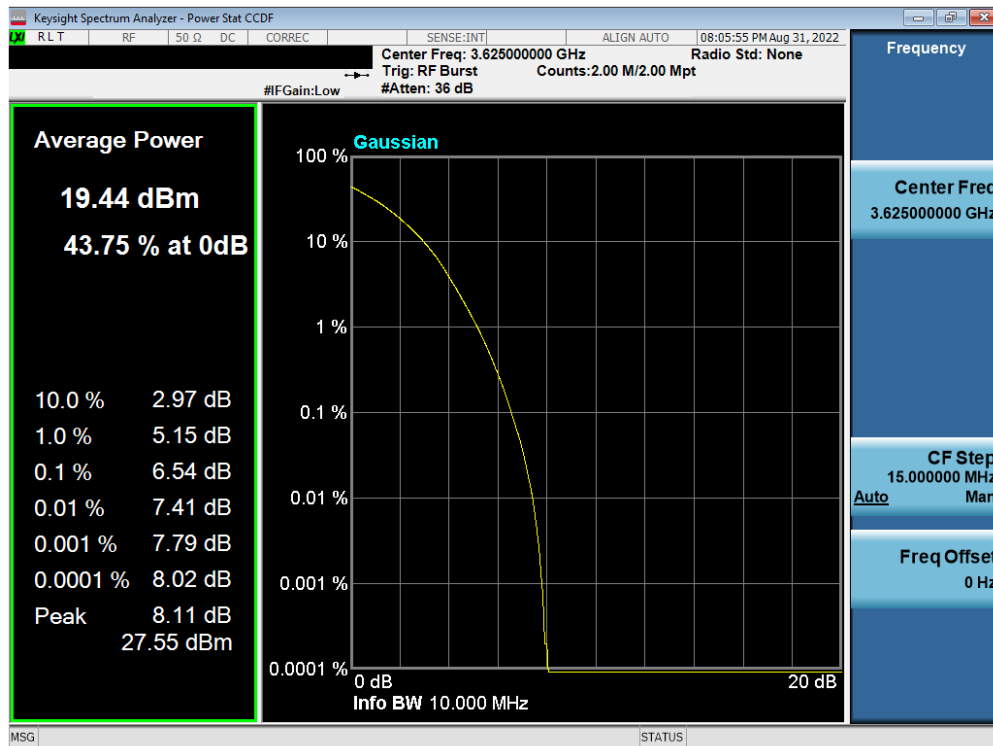


Plot 7-79. PAR Plot (LTE Band 48 - 10MHz 256-QAM - Full RB)

FCC ID: BCGA2435	element	PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 58 of 94



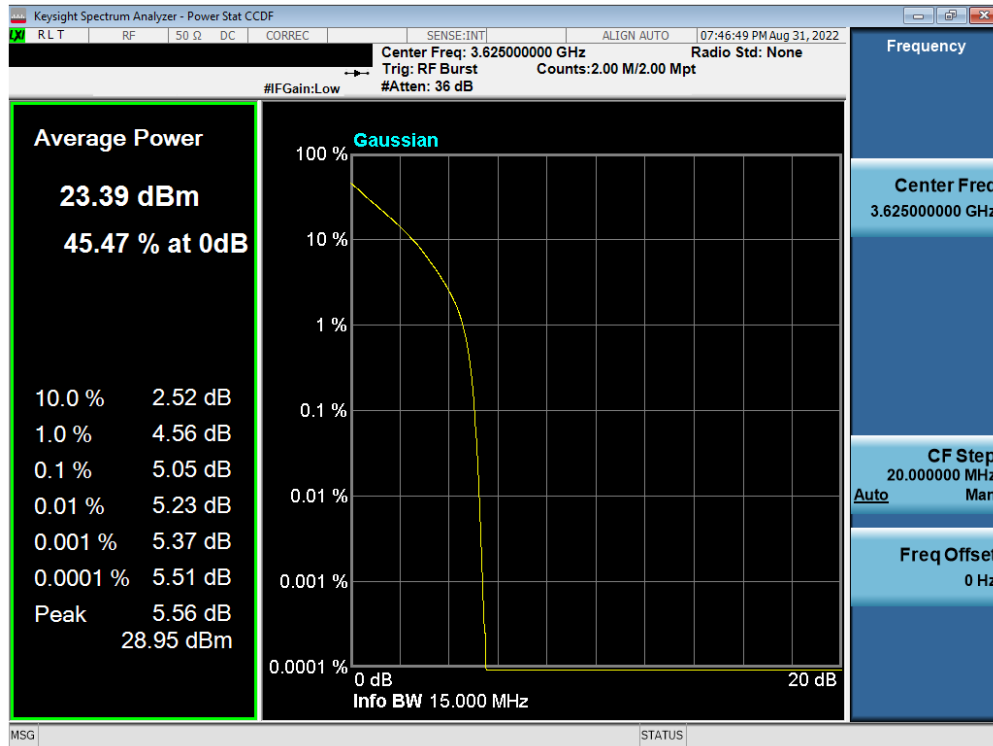


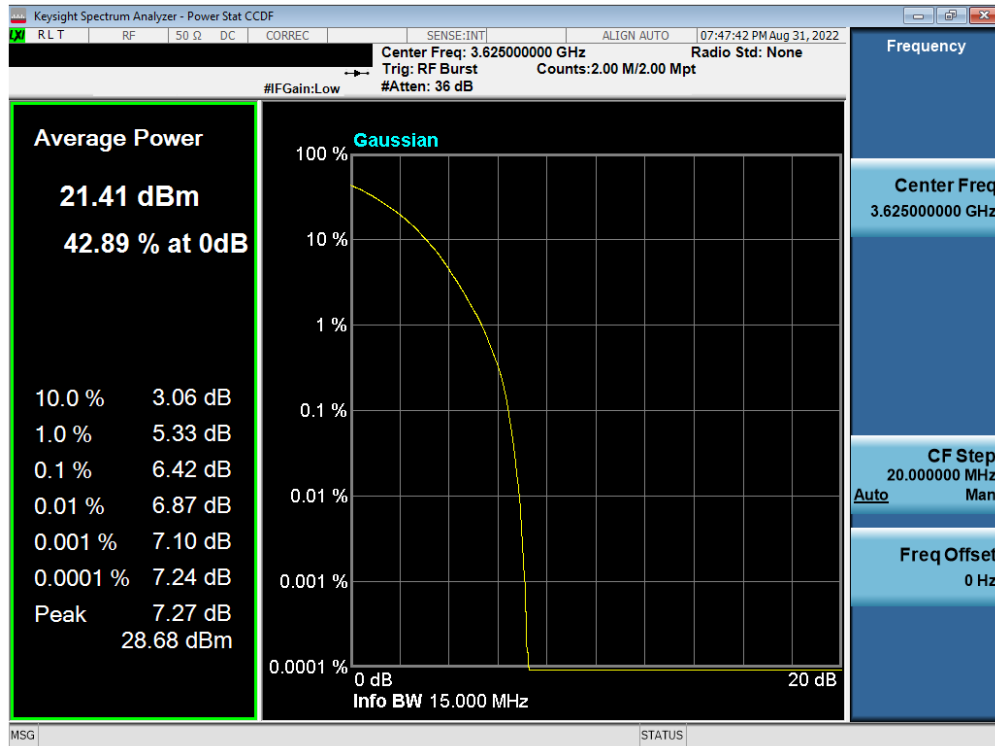
Plot 7-80. PAR Plot (LTE Band 48 - 15MHz QPSK - Full RB)

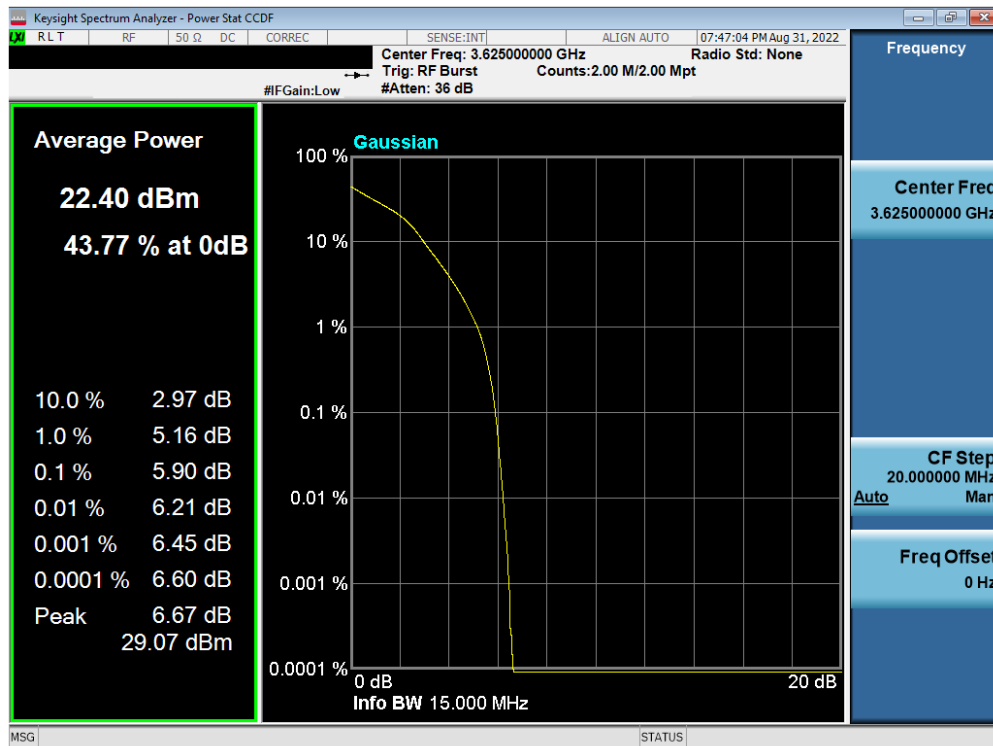


Plot 7-81. PAR Plot (LTE Band 48 - 15MHz 16-QAM - Full RB)

FCC ID: BCGA2435	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device
		Page 59 of 94


V2.1 11/9/2021



Plot 7-82. PAR Plot (LTE Band 48 - 15MHz 64-QAM - Full RB)

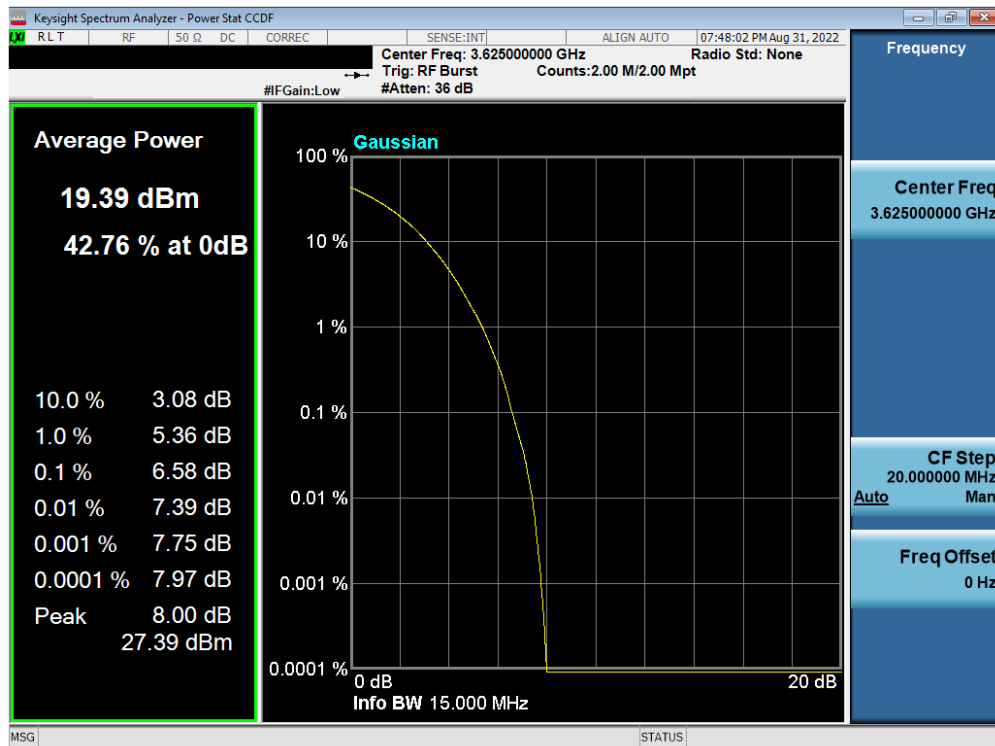


Plot 7-83. PAR Plot (LTE Band 48 - 15MHz 256-QAM - Full RB)


FCC ID: BCGA2435	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device
		Page 60 of 94

V2.1 11/9/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

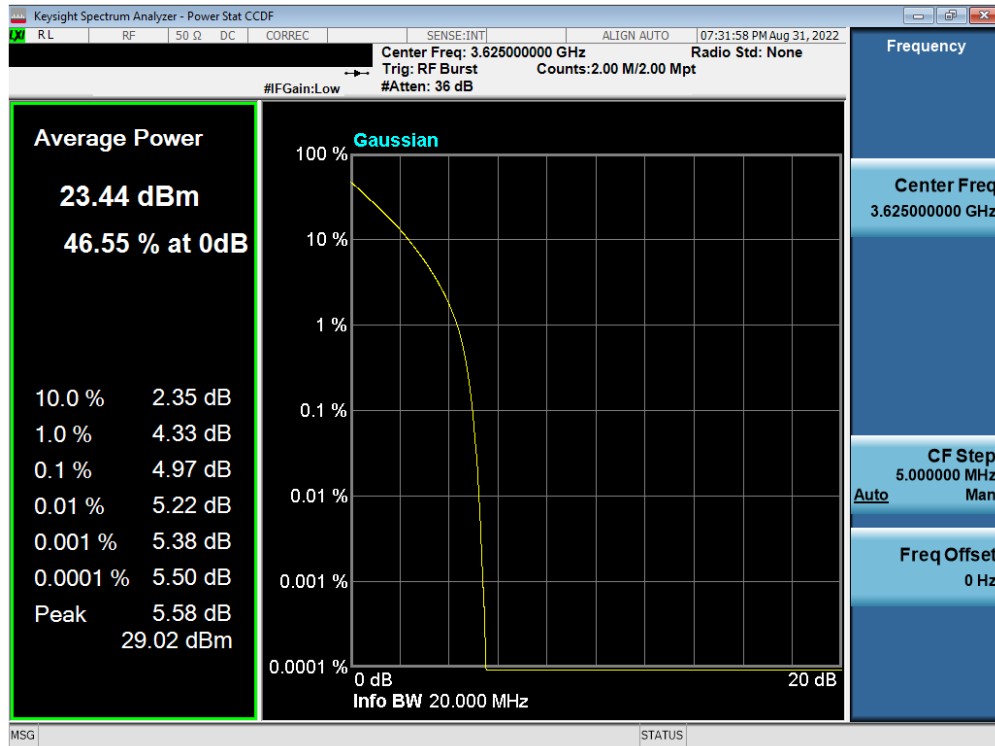


Plot 7-84. PAR Plot (LTE Band 48 - 20MHz QPSK - Full RB)

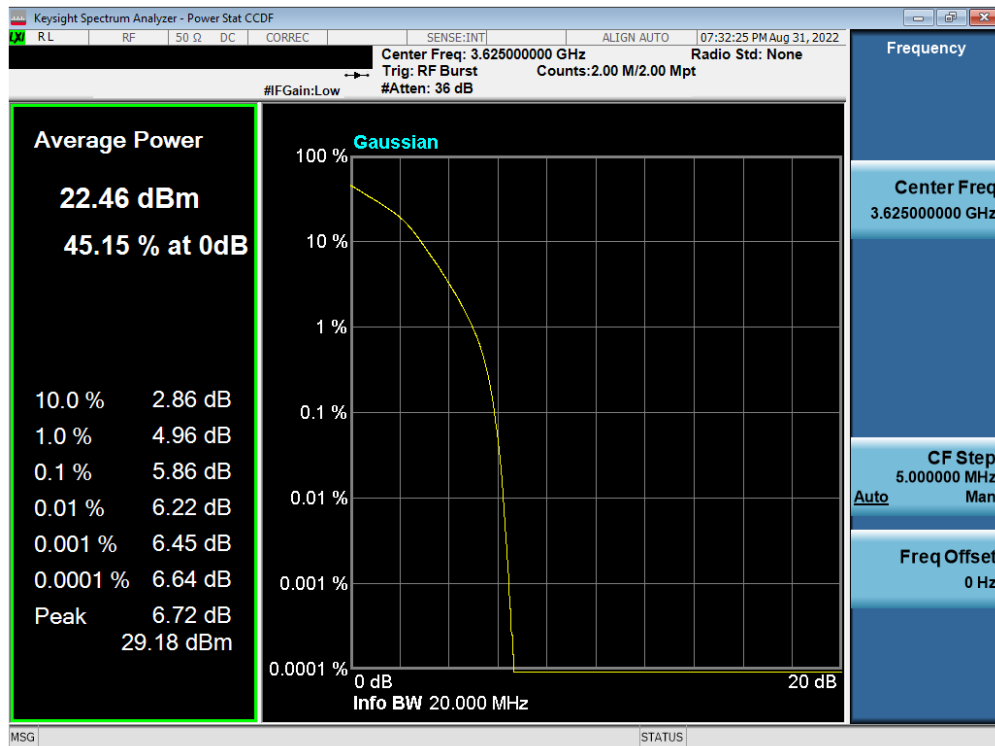


Plot 7-85. PAR Plot (LTE Band 48 - 20MHz 16-QAM - Full RB)

FCC ID: BCGA2435	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device
		Page 61 of 94

V2.1 11/9/2021

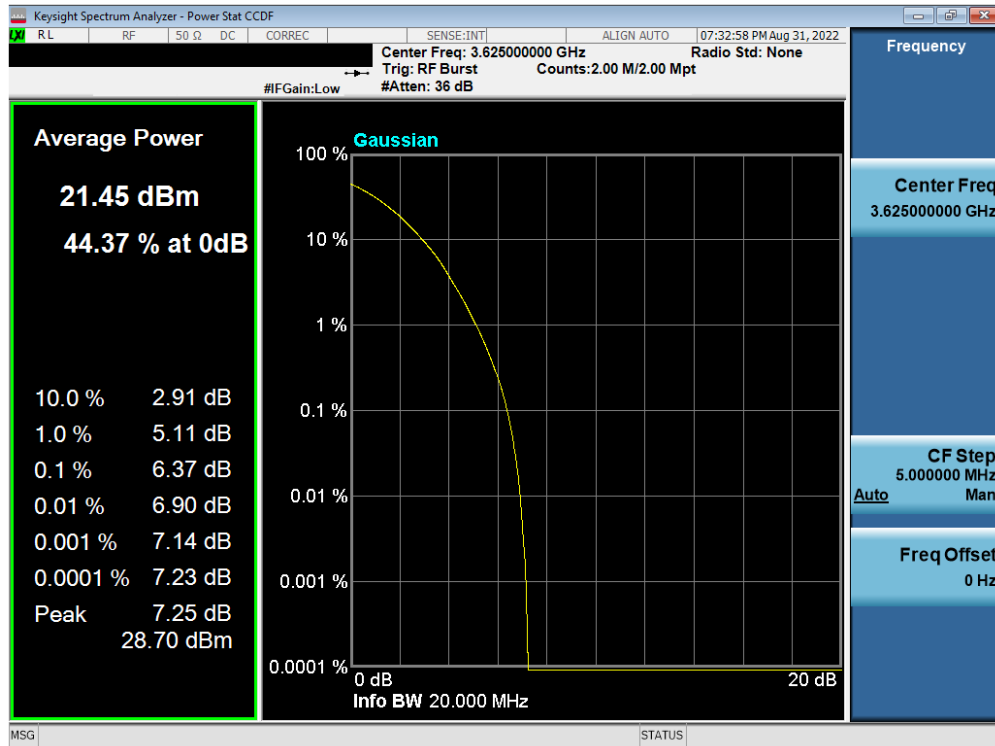

Plot 7-86. PAR Plot (LTE Band 48 - 20MHz 64-QAM - Full RB)

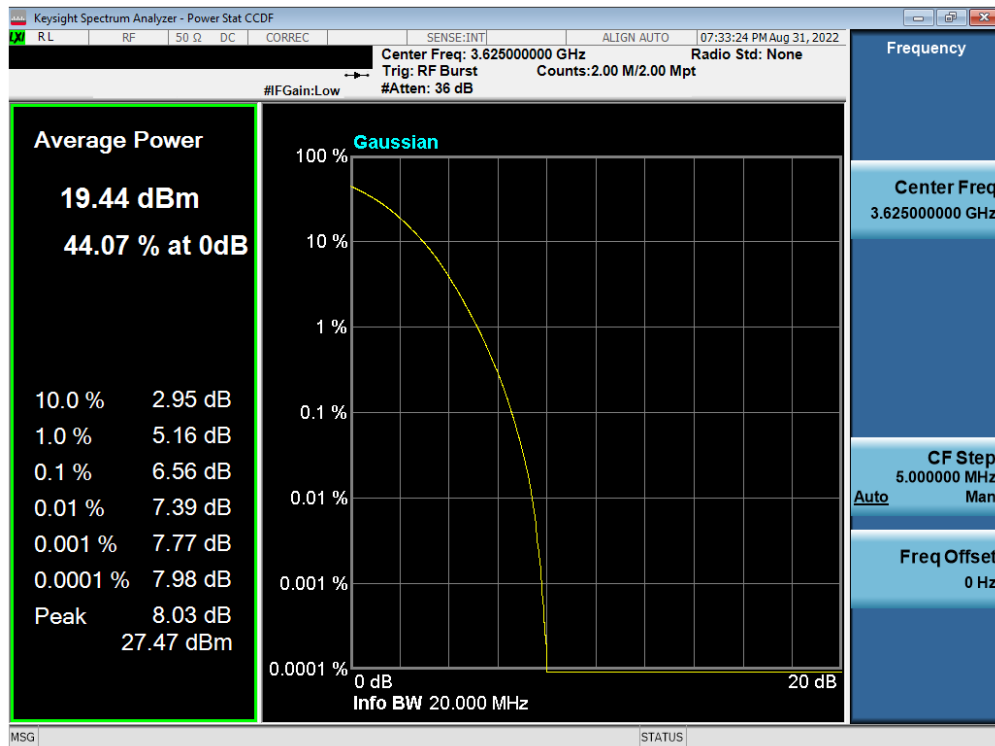

Plot 7-87. PAR Plot (LTE Band 48 - 20MHz 256-QAM - Full RB)

FCC ID: BCGA2435	element	PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 62 of 94

V2.1 11/9/2021

## 7.6 Radiated Power (EIRP)

### §96.41(b)

#### Test Overview

Equivalent Isotropic Radiated Power (EIRP) measurements are calculated by adding highest antenna gain to maximum measured conducted output power. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

#### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI C63.26-2015

#### Test Settings

The relevant equation for determining the EIRP from the conducted RF output power measured is:

$$\text{EIRP} = \text{PMeas} - \text{LC} + \text{GT}$$

Where:

EIRP = Equivalent Isotropic Radiated Power (expressed in the same units as PMeas, typically dBW or dBm)


PMeas = measured transmitter output power or PSD, in dBW or dBm

LC = signal attenuation in the connecting cable between the transmitter and antenna in dB


GT = gain of the transmitting antenna, in dBi (EIRP)

#### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 7-5. EIRP Measurement Setup**

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 63 of 94

V2.1 11/9/2021

## **Test Notes**

- 1) The worst case emissions are reported with the modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) The Level (dBm) readings in the table were taken with a correction table loaded into the base station simulator. The correction table was used to account for the signal attenuation in the connecting cable between the transmitter and antenna.
- 4) The worst case EIRP shown in this section is found with LTE operating only using 1RB. As such, the EIRP/10MHz and full channel EIRP values will be identical since 1RB is fully contained within all available channel bandwidths for LTE Band 48 (i.e. 5, 10, 15, 20MHz).
- 5) Uplink carrier aggregation for LTE B48 is only supported in this EUT while operating in Power Class 3.
- 6) For ULCA, conducted power measurements were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth. Channel bandwidth data is shown in the tables below based only on the channel bandwidths that were supported in this device.

<b>FCC ID:</b> BCGA2435	 <b>PART 96 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090025-10-R3.BCG	<b>Test Dates:</b> 05/30/2022-09/09/2022	<b>EUT Type:</b> Tablet Device	Page 64 of 94

V2.1 11/9/2021


## Antenna 3 – EIRP

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
5 MHz	QPSK	3552.5	0.00	1 / 24	22.00	<b>22.00</b>	<b>0.158</b>	23.00	-1.00
		3625.0	0.00	1 / 24	21.55	<b>21.55</b>	0.143	23.00	-1.45
		3697.5	0.00	1 / 0	21.39	21.39	0.138	23.00	-1.61
	16-QAM	3625.0	0.00	1 / 12	21.01	21.01	0.126	23.00	-1.99
	64-QAM	3697.5	0.00	1 / 0	19.97	19.97	0.099	23.00	-3.03
10 MHz	QPSK	3552.5	0.00	1 / 0	17.02	17.02	<b>0.050</b>	23.00	-5.98
		3555.0	0.00	1 / 49	21.96	21.96	0.157	23.00	-1.04
		3625.0	0.00	1 / 49	21.88	21.88	0.154	23.00	-1.12
	16-QAM	3695.0	0.00	1 / 49	22.00	<b>22.00</b>	<b>0.158</b>	23.00	-1.00
		3695.0	0.00	1 / 49	21.07	21.07	0.128	23.00	-1.93
15 MHz	QPSK	3555.0	0.00	1 / 49	20.11	20.11	0.103	23.00	-2.89
		3555.0	0.00	1 / 49	17.13	17.13	<b>0.052</b>	23.00	-5.87
		3557.5	0.00	1 / 74	21.84	21.84	0.153	23.00	-1.16
	16-QAM	3625.0	0.00	1 / 74	22.00	<b>22.00</b>	<b>0.158</b>	23.00	-1.00
		3692.5	0.00	1 / 74	21.47	21.47	0.140	23.00	-1.53
20 MHz	QPSK	3557.5	0.00	1 / 74	21.16	21.16	0.131	23.00	-1.84
		3692.5	0.00	1 / 37	20.20	20.20	0.105	23.00	-2.80
		3557.5	0.00	1 / 0	17.25	17.25	<b>0.053</b>	23.00	-5.75
	16-QAM	3560.0	0.00	1 / 50	22.00	<b>22.00</b>	<b>0.158</b>	23.00	-1.00
		3625.0	0.00	1 / 0	21.78	21.78	0.151	23.00	-1.22

Table 7-2. EIRP Data (LTE Band 48)

Power State	Band	Bandwidth (PCC + SCC)	PCC				SCC				ULCA Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
			Modulation	UL Channel	UL Frequency [MHz]	UL # RB	UL RB Offset	Modulation	UL Channel	UL Frequency [MHz]	UL # RB	UL RB Offset				
Max	LTE B48	20MHz + 5MHz	QPSK	55340	3560.0	1	99	QPSK	55457	3571.7	1	0	21.85	0.00	21.85	-1.15
				55990	3625.0	1	99		56107	3636.7	1	0	21.74	0.00	21.74	-1.26
				56640	3690.0	1	0		56623	3678.3	1	24	21.88	0.00	21.88	-1.12
			16-QAM	55340	3560.0	100	0	16-QAM	55623	3678.3	25	0	20.00	0.00	20.00	-3.00
				55990	3625.0	100	0		56623	3678.3	25	0	19.11	0.00	19.11	-3.89
				56640	3690.0	100	0		56623	3678.3	25	0	19.04	0.00	19.04	-3.96
Max	LTE B48	20MHz + 10MHz	QPSK	55340	3560.0	1	99	QPSK	55484	3574.4	1	0	21.78	0.00	21.78	-1.22
				55990	3625.0	1	99		56134	3639.4	1	0	21.71	0.00	21.71	-1.29
				56640	3690.0	1	0		56496	3675.6	1	49	21.91	0.00	21.91	-1.09
			16-QAM	55340	3560.0	100	0	16-QAM	55496	3675.6	50	0	20.04	0.00	20.04	-2.96
				55990	3625.0	100	0		56496	3675.6	50	0	19.01	0.00	19.01	-3.99
				56640	3690.0	100	0		56496	3675.6	50	0	19.08	0.00	19.08	-3.92
Max	LTE B48	20MHz + 15MHz	QPSK	55340	3560.0	1	99	QPSK	55511	3577.1	1	0	21.82	0.00	21.82	-1.18
				55990	3625.0	1	99		56161	3642.1	1	0	22.00	0.00	22.00	-1.00
				56640	3690.0	1	0		56469	3672.9	1	74	21.95	0.00	21.95	-1.05
			16-QAM	55340	3560.0	100	0	16-QAM	55611	3642.1	75	0	20.04	0.00	20.04	-2.96
				55990	3625.0	100	0		56161	3642.1	75	0	19.20	0.00	19.20	-3.80
				56640	3690.0	100	0		56161	3642.1	75	0	19.13	0.00	19.13	-3.87
Max	LTE B48	20MHz + 20MHz	QPSK	55340	3560.0	1	99	QPSK	55538	3579.8	1	0	21.74	0.00	21.74	-1.26
				55990	3625.0	1	99		56188	3644.8	1	0	21.84	0.00	21.84	-1.16
				56640	3690.0	1	0		56442	3670.2	1	99	21.80	0.00	21.80	-1.20
			16-QAM	55340	3560.0	100	0	16-QAM	55618	3644.8	100	0	20.16	0.00	20.16	-2.84
				55990	3625.0	100	0		56188	3644.8	100	0	19.00	0.00	19.00	-4.00
				56640	3690.0	100	0		56188	3644.8	100	0	19.08	0.00	19.08	-3.92

Table 7-3. EIRP Data (ULCA Band 48)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 65 of 94	

## Antenna 1 – EIRP

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
5 MHz	QPSK	3552.5	-1.20	1 / 0	23.11	21.91	0.155	23.00	-1.09
		3625.0	-1.20	1 / 0	22.79	21.59	0.144	23.00	-1.41
		3697.5	-1.20	1 / 0	23.20	<b>22.00</b>	<b>0.158</b>	23.00	-1.00
	16-QAM	3552.5	-1.20	1 / 24	22.21	<b>21.01</b>	0.126	23.00	-1.99
	64-QAM	3697.5	-1.20	1 / 0	21.03	19.83	0.096	23.00	-3.17
10 MHz	QPSK	3552.5	-1.20	1 / 24	18.15	16.95	<b>0.050</b>	23.00	-6.05
		3555.0	-1.20	1 / 25	22.96	21.76	0.150	23.00	-1.24
		3625.0	-1.20	1 / 25	22.89	21.69	0.148	23.00	-1.31
	16-QAM	3695.0	-1.20	1 / 25	23.20	<b>22.00</b>	<b>0.158</b>	23.00	-1.00
		3695.0	-1.20	1 / 0	22.20	21.00	0.126	23.00	-2.00
15 MHz	QPSK	3555.0	-1.20	1 / 49	21.12	19.92	0.098	23.00	-3.08
		3695.0	-1.20	1 / 0	18.19	16.99	<b>0.050</b>	23.00	-6.01
		3557.5	-1.20	1 / 0	22.98	21.78	0.151	23.00	-1.22
	16-QAM	3625.0	-1.20	1 / 37	23.17	21.97	0.157	23.00	-1.03
		3692.5	-1.20	1 / 74	23.20	<b>22.00</b>	<b>0.158</b>	23.00	-1.00
20 MHz	QPSK	3692.5	-1.20	1 / 74	22.05	20.85	0.122	23.00	-2.15
		3692.5	-1.20	1 / 0	21.21	20.01	0.100	23.00	-2.99
		3557.5	-1.20	1 / 0	18.17	16.97	<b>0.050</b>	23.00	-6.03
	16-QAM	3560.0	-1.20	1 / 99	23.20	<b>22.00</b>	<b>0.158</b>	23.00	-1.00
		3625.0	-1.20	1 / 0	23.08	21.88	0.154	23.00	-1.12
25 MHz	QPSK	3690.0	-1.20	1 / 99	23.20	<b>22.00</b>	<b>0.158</b>	23.00	-1.00
		3625.0	-1.20	1 / 0	22.11	20.91	0.123	23.00	-2.09
		3690.0	-1.20	1 / 50	21.12	19.92	0.098	23.00	-3.08
	16-QAM	3560.0	-1.20	1 / 99	18.22	17.02	<b>0.050</b>	23.00	-5.98
		3560.0	-1.20	1 / 99	23.20	<b>22.00</b>	<b>0.158</b>	23.00	-1.00

Table 7-4. EIRP Data (LTE Band 48)

Power State	Band	Bandwidth (PCC + SCC)	PCC				SCC				ULCA Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]			
			Modulation	UL Channel	UL Frequency [MHz]	UL # RB	UL RB Offset	Modulation	UL Channel	UL Frequency [MHz]							UL # RB	UL RB Offset	
Max	LTE B48	20MHz + 5MHz	QPSK	55340	3560.0	1	99	QPSK	55457	3571.7	1	0	23.08	-1.20	21.88	0.154	23.00	-1.12	
				55990	3625.0	1	99		56107	3636.7	1	0	23.12	-1.20	21.92	0.156	23.00	-1.08	
				56640	3690.0	1	0		56523	3678.3	1	24	23.06	-1.20	21.86	0.153	23.00	-1.14	
			16-QAM	55990	3625	100	0	QPSK	56107	3636.7	25	0	21.38	-1.20	20.18	0.107	23.00	-2.82	
				55990	3625	100	0	16-QAM	56107	3636.7	25	0	20.27	-1.20	19.07	0.081	23.00	-3.93	
				64-QAM	55990	3625	100	0	64-QAM	56107	3636.7	25	0	20.31	-1.20	19.11	0.081	23.00	-3.89
				256-QAM	55990	3625	100	0	256-QAM	56107	3636.7	25	0	18.25	-1.20	17.05	0.051	23.00	-5.95
Max	LTE B48	20MHz + 10MHz	QPSK	55340	3560.0	1	99	QPSK	55484	3574.4	1	0	23.03	-1.20	21.83	0.152	23.00	-1.17	
				55990	3625.0	1	99		56134	3639.4	1	0	23.09	-1.20	21.89	0.155	23.00	-1.11	
				56640	3690.0	1	0		56496	3675.6	1	49	23.01	-1.20	21.81	0.152	23.00	-1.19	
			16-QAM	55990	3625	100	0	QPSK	56134	3639.4	50	0	21.22	-1.20	20.02	0.100	23.00	-2.98	
				55990	3625	100	0	16-QAM	56134	3639.4	50	0	20.28	-1.20	19.08	0.081	23.00	-3.92	
				64-QAM	55990	3625	100	0	64-QAM	56134	3639.4	50	0	20.31	-1.20	19.11	0.081	23.00	-3.89
				256-QAM	55990	3625	100	0	256-QAM	56134	3639.4	50	0	18.21	-1.20	17.01	0.050	23.00	-5.99
Max	LTE B48	20MHz + 15MHz	QPSK	55340	3560.0	1	99	QPSK	55511	3577.1	1	0	23.18	-1.20	21.98	0.158	23.00	-1.02	
				55990	3625.0	1	99		56161	3642.1	1	0	23.10	-1.20	21.90	0.155	23.00	-1.10	
				56640	3690.0	1	0		56469	3672.9	1	74	22.96	-1.20	21.76	0.150	23.00	-1.24	
			16-QAM	55340	3560	100	0	QPSK	55511	3577.1	75	0	21.32	-1.20	20.12	0.103	23.00	-2.88	
				55340	3560	100	0	16-QAM	55511	3577.1	75	0	20.35	-1.20	19.15	0.082	23.00	-3.85	
				64-QAM	55340	3560	100	0	64-QAM	55511	3577.1	75	0	20.37	-1.20	19.17	0.083	23.00	-3.83
				256-QAM	55340	3560	100	0	256-QAM	55511	3577.1	75	0	18.32	-1.20	17.12	0.052	23.00	-5.88
Max	LTE B48	20MHz + 20MHz	QPSK	55340	3560.0	1	99	QPSK	55538	3579.8	1	0	23.00	-1.20	21.80	0.151	23.00	-1.20	
				55990	3625.0	1	99		56188	3644.8	1	0	23.07	-1.20	21.87	0.154	23.00	-1.13	
				56640	3690.0	1	0		56442	3670.2	1	99	23.03	-1.20	21.83	0.152	23.00	-1.17	
			QPSK	55990	3625	100	0	QPSK	56188	3644.8	100	0	21.29	-1.20	20.09	0.102	23.00	-2.91	
				55990	3625	100	0	16-QAM	56188	3644.8	100	0	20.24	-1.20	19.04	0.080	23.00	-3.96	
				64-QAM	55990	3625	100	0	64-QAM	56188	3644.8	100	0	20.28	-1.20	19.08	0.081	23.00	-3.92
				256-QAM	55990	3625	100	0	256-QAM	56188	3644.8	100	0	18.25	-1.20	17.05	0.051	23.00	-5.95

Table 7-5. EIRP Data (ULCA Band 48)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 66 of 94

V2.1 11/9/2021




## Antenna 4b – EIRP

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
5 MHz	QPSK	3552.5	-1.60	1 / 0	23.60	22.00	0.158	23.00	-1.00
		3625.0	-1.60	1 / 12	23.47	21.87	0.154	23.00	-1.13
		3697.5	-1.60	1 / 24	23.02	21.42	0.139	23.00	-1.58
	16-QAM	3697.5	-1.60	1 / 12	22.52	20.92	0.124	23.00	-2.08
	64-QAM	3625.0	-1.60	1 / 0	21.58	19.98	0.100	23.00	-3.02
10 MHz	QPSK	3555.0	-1.60	1 / 0	23.41	21.81	0.152	23.00	-1.19
		3625.0	-1.60	1 / 25	23.60	22.00	0.158	23.00	-1.00
		3695.0	-1.60	1 / 25	23.21	21.61	0.145	23.00	-1.39
	16-QAM	3695.0	-1.60	1 / 0	22.49	20.89	0.123	23.00	-2.11
	64-QAM	3695.0	-1.60	1 / 49	21.58	19.98	0.100	23.00	-3.02
15 MHz	QPSK	3557.5	-1.60	1 / 37	23.60	22.00	0.158	23.00	-1.00
		3625.0	-1.60	1 / 0	23.20	21.60	0.145	23.00	-1.40
		3692.5	-1.60	1 / 74	23.48	21.88	0.154	23.00	-1.12
	16-QAM	3692.5	-1.60	1 / 74	22.66	21.06	0.128	23.00	-1.94
	64-QAM	3625.0	-1.60	1 / 37	21.70	20.10	0.102	23.00	-2.90
20 MHz	QPSK	3560.0	-1.60	1 / 99	22.91	21.31	0.135	23.00	-1.69
		3625.0	-1.60	1 / 0	23.60	22.00	0.158	23.00	-1.00
		3690.0	-1.60	1 / 0	23.47	21.87	0.154	23.00	-1.13
	16-QAM	3560.0	-1.60	1 / 0	22.54	20.94	0.124	23.00	-2.06
	64-QAM	3690.0	-1.60	1 / 0	21.59	19.99	0.100	23.00	-3.01
20 MHz	QPSK	3560.0	-1.60	1 / 50	18.47	16.87	0.049	23.00	-6.13
		3625.0	-1.60	1 / 50	18.47	16.87	0.049	23.00	-6.13
		3690.0	-1.60	1 / 50	18.47	16.87	0.049	23.00	-6.13
	16-QAM	3560.0	-1.60	1 / 50	18.47	16.87	0.049	23.00	-6.13
	64-QAM	3690.0	-1.60	1 / 50	18.47	16.87	0.049	23.00	-6.13

Table 7-6. EIRP Data (LTE Band 48)

Power State	Band	Bandwidth (PCC + SCC)	PCC				SCC				ULCA Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
			Modulation	UL Channel	UL Frequency [MHz]	UL # RB	UL RB Offset	Modulation	UL Channel	UL Frequency [MHz]	UL # RB	UL RB Offset				
Max	LTE B48	20MHz + 5MHz	QPSK	55340	3560.0	1	99	QPSK	55457	3571.7	1	0	23.42	-1.60	21.82	-1.18
				55990	3625.0	1	99		56107	3636.7	1	0	23.60	-1.60	22.00	-1.00
				56640	3690.0	1	0		56523	3678.3	1	24	23.38	-1.60	21.78	-1.22
				55990	3625.0	100	0		56107	3636.7	25	0	21.67	-1.60	20.07	-2.93
			16-QAM	55990	3625.0	100	0	16-QAM	56107	3636.7	25	0	20.71	-1.60	19.11	-3.89
				55990	3625.0	100	0		56107	3636.7	25	0	20.64	-1.60	19.04	-3.96
				55990	3625.0	100	0		56107	3636.7	25	0	18.70	-1.60	17.10	-5.90
				55990	3625.0	100	0		56107	3636.7	25	0	18.70	-1.60	17.10	-5.90
Max	LTE B48	20MHz + 10MHz	QPSK	55340	3560.0	1	99	QPSK	55484	3574.4	1	0	23.54	-1.60	21.94	-1.06
				55990	3625.0	1	99		56134	3639.4	1	0	23.33	-1.60	21.73	-1.27
				56640	3690.0	1	0		56496	3675.6	1	49	23.38	-1.60	21.78	-1.22
				55340	3560.0	100	0		55484	3574.4	50	0	21.70	-1.60	20.10	-2.90
			16-QAM	55340	3560.0	100	0	16-QAM	55484	3574.4	50	0	20.79	-1.60	19.19	-3.81
				55340	3560.0	100	0		55484	3574.4	50	0	20.76	-1.60	19.16	-3.84
				55340	3560.0	100	0		55484	3574.4	50	0	18.60	-1.60	17.00	-6.00
				55340	3560.0	100	0		55484	3574.4	50	0	18.60	-1.60	17.00	-6.00
Max	LTE B48	20MHz + 15MHz	QPSK	55340	3560.0	1	99	QPSK	55511	3577.1	1	0	23.52	-1.60	21.92	-1.08
				55990	3625.0	1	99		56161	3642.1	1	0	23.34	-1.60	21.74	-1.26
				56640	3690.0	1	0		56489	3672.9	1	74	23.40	-1.60	21.80	-1.20
				55340	3560.0	100	0		55511	3577.1	75	0	21.61	-1.60	20.01	-2.99
			16-QAM	55340	3560.0	100	0	16-QAM	55511	3577.1	75	0	20.64	-1.60	19.04	-3.96
				55340	3560.0	100	0		55511	3577.1	75	0	20.75	-1.60	19.15	-3.85
				55340	3560.0	100	0		55511	3577.1	75	0	18.78	-1.60	17.18	-5.82
				55340	3560.0	100	0		55511	3577.1	75	0	18.78	-1.60	17.18	-5.82
Max	LTE B48	20MHz + 20MHz	QPSK	55340	3560.0	1	99	QPSK	55538	3579.8	1	0	23.40	-1.60	21.80	-1.20
				55990	3625.0	1	99		56188	3644.8	1	0	23.36	-1.60	21.76	-1.24
				56640	3690.0	1	0		56442	3670.2	1	99	23.56	-1.60	21.96	-1.04
				55340	3560.0	100	0	QPSK	55511	3577.1	100	0	21.74	-1.60	20.14	-2.86
			16-QAM	55340	3560.0	100	0		55511	3577.1	100	0	20.66	-1.60	19.06	-3.94
				55340	3560.0	100	0		55511	3577.1	100	0	20.61	-1.60	19.01	-3.99
				55340	3560.0	100	0		55511	3577.1	100	0	18.60	-1.60	17.00	-6.00
				55340	3560.0	100	0		55511	3577.1	100	0	18.60	-1.60	17.00	-6.00

Table 7-7. EIRP Data (ULCA Band 48)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 67 of 94

V2.1 11/9/2021


## Antenna 2a – EIRP

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
5 MHz	QPSK	3552.5	1.80	1 / 24	20.02	21.82	0.152	23.00	-1.18
		3625.0	1.80	1 / 24	20.20	<b>22.00</b>	<b>0.158</b>	23.00	-1.00
		3697.5	1.80	1 / 24	19.99	21.79	0.151	23.00	-1.21
	16-QAM	3697.5	1.80	1 / 12	19.16	<b>20.96</b>	0.125	23.00	-2.04
	64-QAM	3697.5	1.80	1 / 12	18.15	19.95	0.099	23.00	-3.05
10 MHz	QPSK	3552.5	1.80	1 / 24	15.20	17.00	<b>0.050</b>	23.00	-6.00
		3555.0	1.80	1 / 25	20.08	21.88	0.154	23.00	-1.12
		3625.0	1.80	1 / 0	20.00	21.80	0.151	23.00	-1.20
	16-QAM	3695.0	1.80	1 / 25	20.20	<b>22.00</b>	<b>0.158</b>	23.00	-1.00
		3695.0	1.80	1 / 0	19.26	21.06	0.128	23.00	-1.94
15 MHz	QPSK	3625.0	1.80	1 / 25	18.11	19.91	0.098	23.00	-3.09
		3625.0	1.80	1 / 0	14.96	16.76	<b>0.047</b>	23.00	-6.24
		3692.5	1.80	1 / 0	19.92	21.72	0.149	23.00	-1.28
	16-QAM	3692.5	1.80	1 / 37	19.98	21.78	0.151	23.00	-1.22
		3692.5	1.80	1 / 0	20.20	<b>22.00</b>	<b>0.158</b>	23.00	-1.00
20 MHz	QPSK	3692.5	1.80	1 / 74	18.20	20.00	0.100	23.00	-3.00
		3692.5	1.80	1 / 37	15.47	17.27	<b>0.053</b>	23.00	-5.73
		3560.0	1.80	1 / 0	20.20	<b>22.00</b>	<b>0.158</b>	23.00	-1.00
	16-QAM	3625.0	1.80	1 / 99	19.95	21.75	0.150	23.00	-1.25
		3690.0	1.80	1 / 50	20.20	<b>22.00</b>	<b>0.158</b>	23.00	-1.00

Table 7-8. EIRP Data (LTE Band 48)

Power State	Band	Bandwidth (PCC + SCC)	PCC				SCC				ULCA Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]					
			Modulation	UL Channel	UL Frequency [MHz]	UL # RB	UL RB Offset	Modulation	UL Channel	UL Frequency [MHz]							UL # RB	UL RB Offset			
Max	LTE B48	20MHz + 5MHz	QPSK	55340	3560.0	1	99	QPSK	55457	3571.7	1	0	19.95	1.80	21.75	0.150	23.00	-1.25			
				55990	3625.0	1	99		56107	3636.7	1	0	19.96	1.80	21.76	0.150	23.00	-1.24			
				56640	3690.0	1	0		56523	3678.3	1	24	19.98	1.80	21.78	0.151	23.00	-1.22			
			16-QAM	56640	3690	100	0	QPSK	56523	3678.3	25	0	18.24	1.80	20.04	0.101	23.00	-2.96			
				56640	3690	100	0	16-QAM	56523	3678.3	25	0	17.30	1.80	19.10	0.081	23.00	-3.90			
				64-QAM	56640	3690	100	0	64-QAM	56523	3678.3	25	0	17.33	1.80	19.13	0.082	23.00	-3.87		
			256-QAM	56640	3690	100	0	256-QAM	56523	3678.3	25	0	15.36	1.80	17.16	0.052	23.00	-5.84			
				55340	3560.0	1	99	55484	3574.4	1	0	20.18	1.80	21.98	0.158	23.00	-1.02				
Max	LTE B48	20MHz + 10MHz	QPSK	55990	3625.0	1	99	QPSK	56134	3639.4	1	0	20.15	1.80	21.95	0.157	23.00	-1.05			
				56640	3690.0	1	0		56496	3675.6	1	49	20.20	1.80	22.00	0.158	23.00	-1.00			
				56640	3690	100	0		QPSK	56496	3675.6	50	0	18.37	1.80	20.17	0.104	23.00	-2.83		
			16-QAM	56640	3690	100	0	16-QAM	56496	3675.6	50	0	17.30	1.80	19.10	0.081	23.00	-3.90			
				64-QAM	56640	3690	100	0	64-QAM	56496	3675.6	50	0	17.35	1.80	19.15	0.082	23.00	-3.85		
				256-QAM	56640	3690	100	0	256-QAM	56496	3675.6	50	0	15.24	1.80	17.04	0.051	23.00	-5.96		
			Max	LTE B48	20MHz + 15MHz	QPSK	55340	3560.0	1	99	QPSK	55511	3577.1	1	0	20.06	1.80	21.86	0.153	23.00	-1.14
							55990	3625.0	1	99		56161	3642.1	1	0	20.01	1.80	21.81	0.152	23.00	-1.19
56640	3690.0	1					0	56469	3672.9	1		74	20.20	1.80	22.00	0.158	23.00	-1.00			
QPSK	56640	3690				100	0	QPSK	56469	3672.9	75	0	18.24	1.80	20.04	0.101	23.00	-2.96			
	16-QAM	56640				3690	100	0	16-QAM	56469	3672.9	75	0	17.22	1.80	19.02	0.080	23.00	-3.98		
	64-QAM	56640				3690	100	0	64-QAM	56469	3672.9	75	0	17.30	1.80	19.10	0.081	23.00	-3.90		
256-QAM	56640	3690				100	0	256-QAM	56469	3672.9	75	0	15.28	1.80	17.08	0.051	23.00	-5.92			
	55340	3560.0				1	99	55538	3579.8	1	0	20.09	1.80	21.89	0.155	23.00	-1.11				
Max	LTE B48	20MHz + 20MHz	QPSK	55990	3625.0	1	99	QPSK	56188	3644.8	1	0	19.91	1.80	21.71	0.148	23.00	-1.29			
				56640	3690.0	1	0		56442	3670.2	1	99	20.12	1.80	21.92	0.156	23.00	-1.08			
				56640	3690	100	0		QPSK	56442	3670.2	100	0	18.39	1.80	20.19	0.104	23.00	-2.81		
			16-QAM	56640	3690	100	0	16-QAM	56442	3670.2	100	0	17.40	1.80	19.20	0.083	23.00	-3.80			
				64-QAM	56640	3690	100	0	64-QAM	56442	3670.2	100	0	17.38	1.80	19.18	0.083	23.00	-3.82		
				256-QAM	56640	3690	100	0	256-QAM	56442	3670.2	100	0	15.30	1.80	17.10	0.051	23.00	-5.90		

Table 7-9. EIRP Data (ULCA Band 48)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 68 of 94

V2.1 11/9/2021

## 7.7 Radiated Spurious Emissions

§2.1053 §96.41(e)

### Test Overview

Radiated spurious emissions measurements are performed using the field strength conversion method described in KDB 971168 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized broadband hybrid antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed while the EUT is operating at maximum power and at the appropriate frequencies.

### Test Procedures Used


KDB 971168 D01 v03r01 – Section 5.8

ANSI C63.26-2015

TIA-603-E-2016 – Section 2.2.12

### Test Settings


1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq 2 \times$  span / RBW
5. Detector = RMS
6. Trace mode = Max Hold (In cases where the level is within 2dB of the limit, the final measurement is taken using triggering/gating and trace averaging.)
7. The trace was allowed to stabilize

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 69 of 94

V2.1 11/9/2021

## Test Setup


The EUT and measurement equipment were set up as shown in the diagram below.

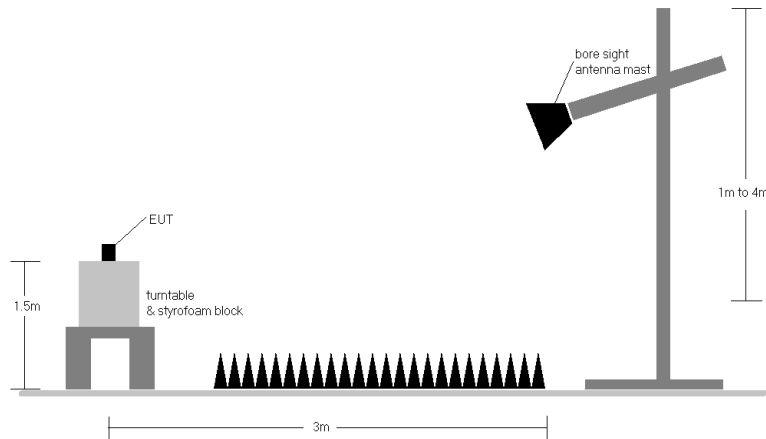

**Figure 7-6. Test Instrument & Measurement Setup**

## Test Notes

- Field strengths are calculated using the Measurement quantity conversions in KDB 971168 Section 5.8.4.
  - $E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
  - $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V}/\text{m}) + 20\log D - 104.8$ ; where D is the measurement distance in meters.
- The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below. 1RB config was found and reported as a worst case RB size.
- This unit was tested with its standard battery.
- The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- The "-" shown in the following RSE tables are used to denote a noise floor measurement.
- Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- For LTE Band 48 pre-scans 1-18GHz, the RBW is set to 1MHz and VBW to 30kHz. For final measurements above 1GHz, the RBW is set to 1MHz and VBW to 3MHz when measuring with an RMS detector and max hold trace.
- Uplink carrier aggregation intra-band radiated spurious emissions measurements were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth. The worst case (highest) emissions were found while operating with QPSK modulation with both carriers set to transmit using 1RB

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 70 of 94

## 7.7.1 Antenna 3 Radiated Spurious Emissions Measurements

### LTE Band 48

Bandwidth (MHz):	20
Frequency (MHz):	3560.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7120.0	V	-	-	-79.39	8.93	36.54	-58.72	-40.00	-18.72
10680.0	V	233	152	-76.52	14.88	45.36	-49.90	-40.00	-9.90
14240.0	V	-	-	-83.04	19.01	42.97	-52.29	-40.00	-12.29
17800.0	V	-	-	-83.40	23.15	46.75	-48.51	-40.00	-8.51

Table 7-10. Radiated Spurious Data (LTE Band 48 – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	3625.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	V	-	-	-79.14	8.96	36.82	-58.44	-40.00	-18.44
10875.0	V	224	150	-77.05	15.24	45.19	-50.07	-40.00	-10.07
14500.0	V	-	-	-83.60	19.82	43.22	-52.04	-40.00	-12.04

Table 7-11. Radiated Spurious Data (LTE Band 48 – Mid Channel)

Bandwidth (MHz):	20
Frequency (MHz):	3690.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7380.0	V	-	-	-79.51	9.33	36.82	-58.44	-40.00	-18.44
11070.0	V	226	147	-78.63	15.87	44.24	-51.02	-40.00	-11.02
14760.0	V	-	-	-84.32	20.82	43.50	-51.76	-40.00	-11.76

Table 7-12. Radiated Spurious Data (LTE Band 48 – High Channel)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device		Page 71 of 94

V2.1 11/9/2021

## ULCA Band 48

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3560.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3579.8
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7120.0	V	-	-	-79.46	8.93	36.47	-58.79	-40.00	-18.79
10680.0	V	-	-	-82.68	14.88	39.20	-56.06	-40.00	-16.06
14240.0	V	-	-	-83.18	19.01	42.83	-52.43	-40.00	-12.43

Table 7-13. Radiated Spurious Data (ULCA Band 48– Low Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3625.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3644.8
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	V	-	-	-79.18	8.96	36.78	-58.48	-40.00	-18.48
10875.0	V	-	-	-83.12	15.24	39.12	-56.14	-40.00	-16.14
14500.0	V	-	-	-83.53	19.82	43.29	-51.97	-40.00	-11.97

Table 7-14. Radiated Spurious Data (ULCA Band 48– Mid Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3690.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3670.2
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7380.0	V	-	-	-79.78	9.33	36.55	-58.71	-40.00	-18.71
11070.0	V	-	-	-82.83	15.87	40.04	-55.22	-40.00	-15.22
14760.0	V	-	-	-83.71	20.82	44.11	-51.15	-40.00	-11.15

Table 7-15. Radiated Spurious Data (ULCA Band 48– High Channel)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device		Page 72 of 94

V2.1 11/9/2021

## Antenna 1 Radiated Spurious Emissions Measurements

### LTE Band 48

Bandwidth (MHz):	20
Frequency (MHz):	3560.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7120.0	H	-	-	-79.16	8.93	36.77	-58.49	-40.00	-18.49
10680.0	H	-	-	-82.75	14.88	39.13	-56.13	-40.00	-16.13
14240.0	H	-	-	-83.05	19.01	42.96	-52.30	-40.00	-12.30

Table 7-16. Radiated Spurious Data (LTE Band 48 – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	3625.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	H	-	-	-79.33	8.96	36.63	-58.63	-40.00	-18.63
10875.0	H	-	-	-83.07	15.24	39.17	-56.09	-40.00	-16.09
14500.0	H	-	-	-83.36	19.82	43.46	-51.80	-40.00	-11.80

Table 7-17. Radiated Spurious Data (LTE Band 48 – Mid Channel)

Bandwidth (MHz):	20
Frequency (MHz):	3690.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7380.0	H	-	-	-79.33	8.96	36.63	-58.63	-40.00	-18.63
11070.0	H	-	-	-83.07	15.24	39.17	-56.09	-40.00	-16.09
14760.0	H	-	-	-83.36	19.82	43.46	-51.80	-40.00	-11.80

Table 7-18. Radiated Spurious Data (LTE Band 48 – High Channel)

FCC ID: BCGA2435	 <b>PART 96 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 73 of 94

V2.1 11/9/2021



## ULCA Band 48

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3560.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3579.8
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7120.0	H	-	-	-81.20	8.93	34.73	-60.53	-40.00	-20.53
10680.0	H	-	-	-82.84	14.88	39.04	-56.22	-40.00	-16.22
14240.0	H	-	-	-84.76	19.01	41.25	-54.01	-40.00	-14.01

Table 7-19. Radiated Spurious Data (ULCA Band 48– Low Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3625.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3644.8
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	H	-	-	-80.06	11.59	38.53	-56.72	-40.00	-16.72
10875.0	H	-	-	-81.45	15.46	41.01	-54.25	-40.00	-14.25
14500.0	H	-	-	-83.49	20.16	43.67	-51.58	-40.00	-11.58

Table 7-20. Radiated Spurious Data (ULCA Band 48– Mid Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3690.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3670.2
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7380.0	H	-	-	-80.97	10.90	36.93	-58.33	-40.00	-18.33
11070.0	H	-	-	-81.86	15.98	41.12	-54.14	-40.00	-14.14
14760.0	H	-	-	-81.78	20.78	46.00	-49.25	-40.00	-9.25

Table 7-21. Radiated Spurious Data (ULCA Band 48– High Channel)


FCC ID: BCGA2435	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device
		Page 74 of 94

V2.1 11/9/2021




## 7.7.3 Antenna 4b Radiated Spurious Emissions Measurements

### LTE Band 48

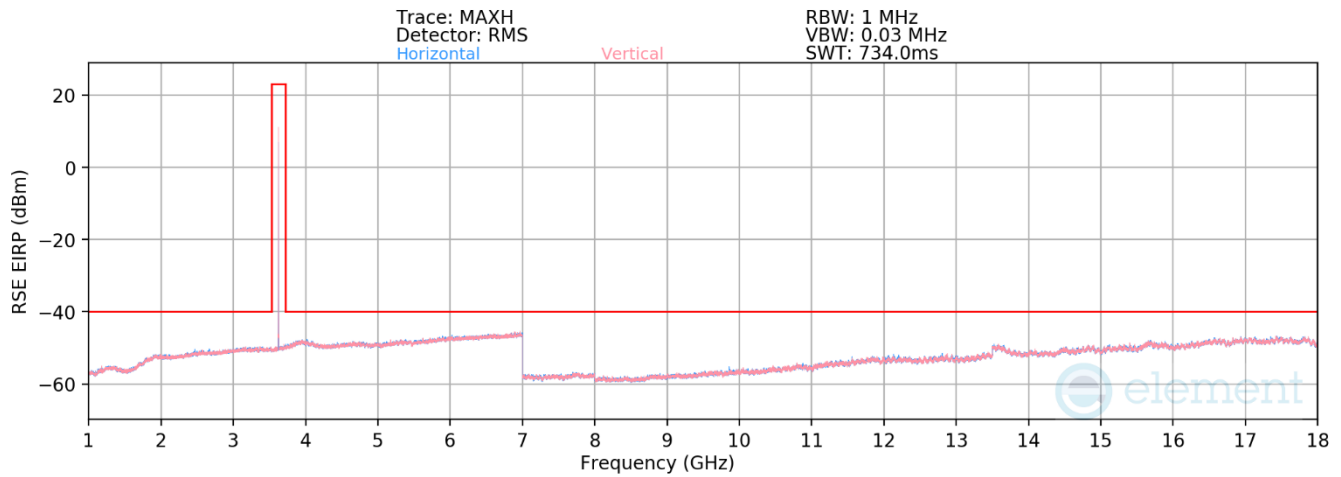

Plot 7-88. Radiated Spurious Plot 1 – 18GHz (LTE Band 48)

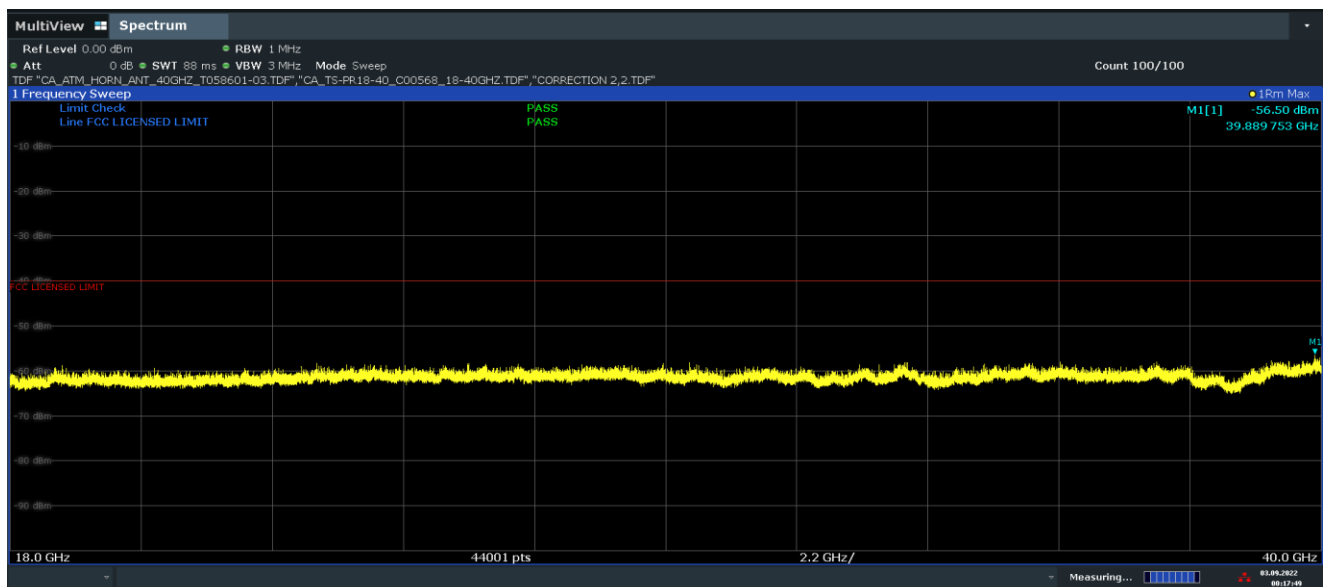


Plot 7-89. Radiated Spurious Plot 18 – 40GHz (LTE Band 48 – Ant. Pol H)

FCC ID: BCGA2435	element	PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 75 of 94

V2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

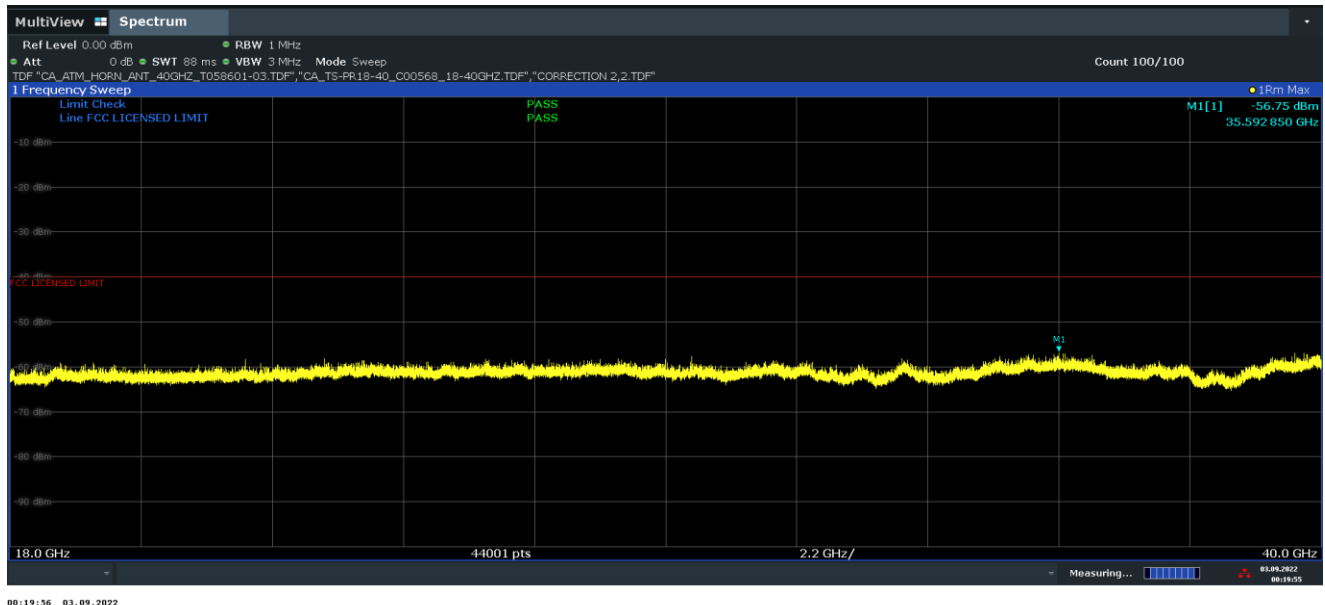

Plot 7-90. Radiated Spurious Plot 18 – 40GHz (LTE Band 48 – Ant. Pol V)

Bandwidth (MHz):	20
Frequency (MHz):	3560.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7120.0	H	-	-	-79.37	8.93	36.56	-58.70	-40.00	-18.70
10680.0	H	-	-	-82.69	14.88	39.19	-56.07	-40.00	-16.07
14240.0	H	-	-	-82.86	19.01	43.15	-52.11	-40.00	-12.11

Table 7-22. Radiated Spurious Data (LTE Band 48 – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	3625.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	H	-	-	-79.20	8.96	36.76	-58.50	-40.00	-18.50
10875.0	H	-	-	-82.87	15.24	39.37	-55.89	-40.00	-15.89
14500.0	H	-	-	-83.39	19.82	43.43	-51.83	-40.00	-11.83

Table 7-23. Radiated Spurious Data (LTE Band 48 – Mid Channel)


FCC ID: BCGA2435	PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device
		Page 76 of 94

V2.1 11/9/2021

Bandwidth (MHz):	20
Frequency (MHz):	3690.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7380.0	H	-	-	-79.52	9.33	36.81	-58.45	-40.00	-18.45
11070.0	H	-	-	-83.04	15.87	39.83	-55.43	-40.00	-15.43
14760.0	H	-	-	-84.31	20.82	43.51	-51.75	-40.00	-11.75

**Table 7-24. Radiated Spurious Data (LTE Band 48 – High Channel)**


FCC ID: BCGA2435	 <b>PART 96 MEASUREMENT REPORT</b>	Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device
		Page 77 of 94

V2.1 11/9/2021

## ULCA Band 48

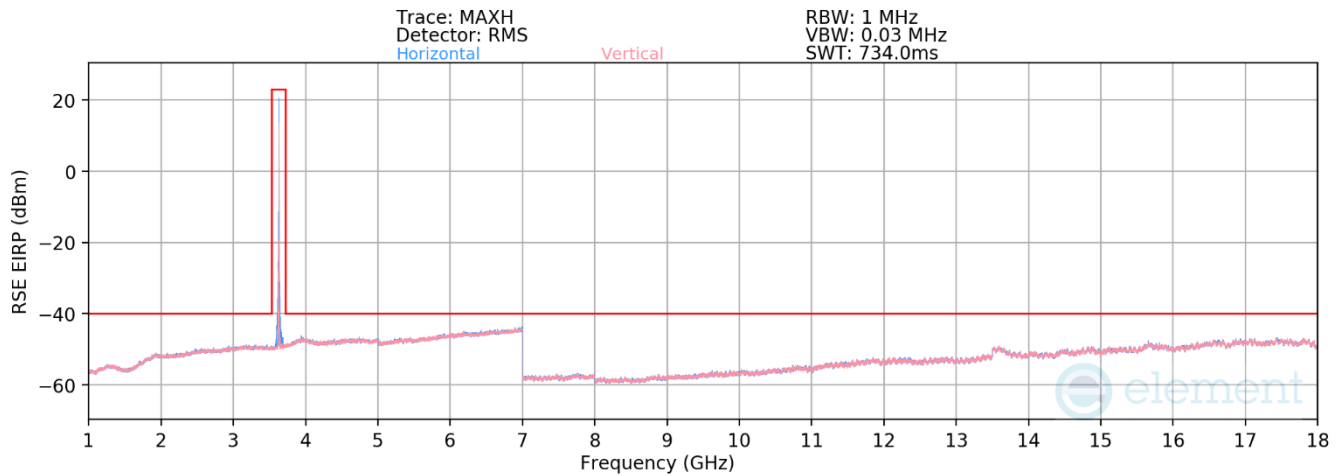


Plot 7-91. Radiated Spurious Plot 1 – 18GHz (ULCA Band 48)

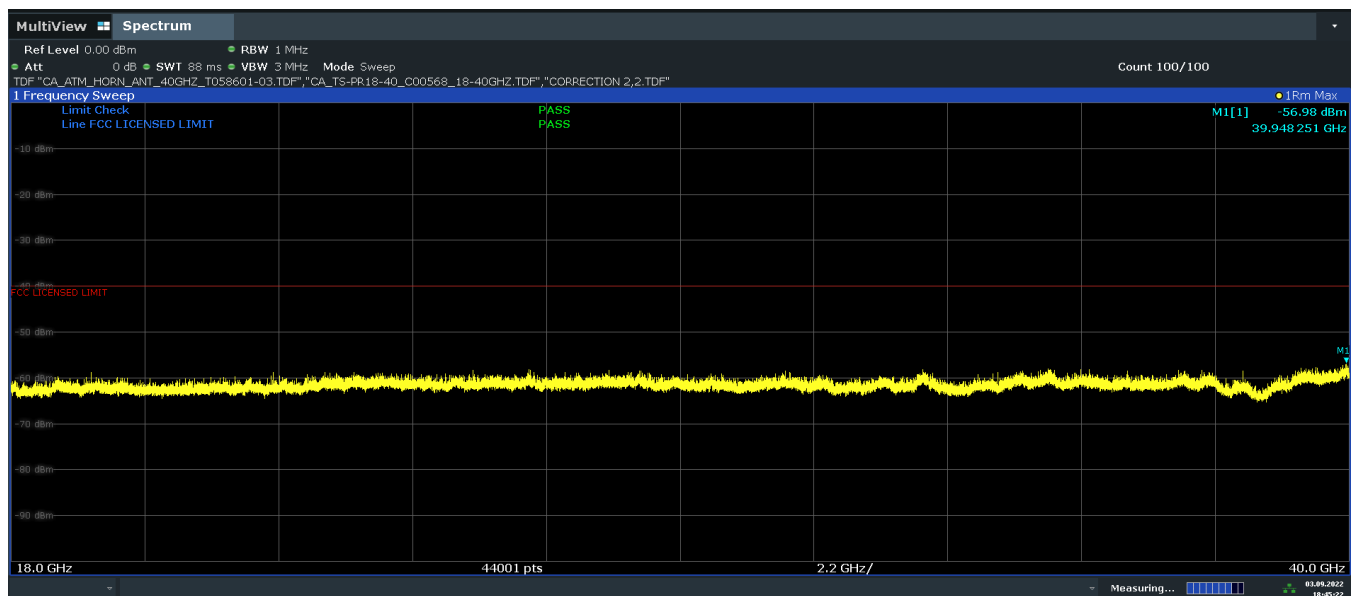


18:45:23 03.09.2022

Plot 7-92. Radiated Spurious Plot 18 – 40GHz (ULCA Band 48, Ant. Pol H)

FCC ID: BCGA2435	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device
		Page 78 of 94

V2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

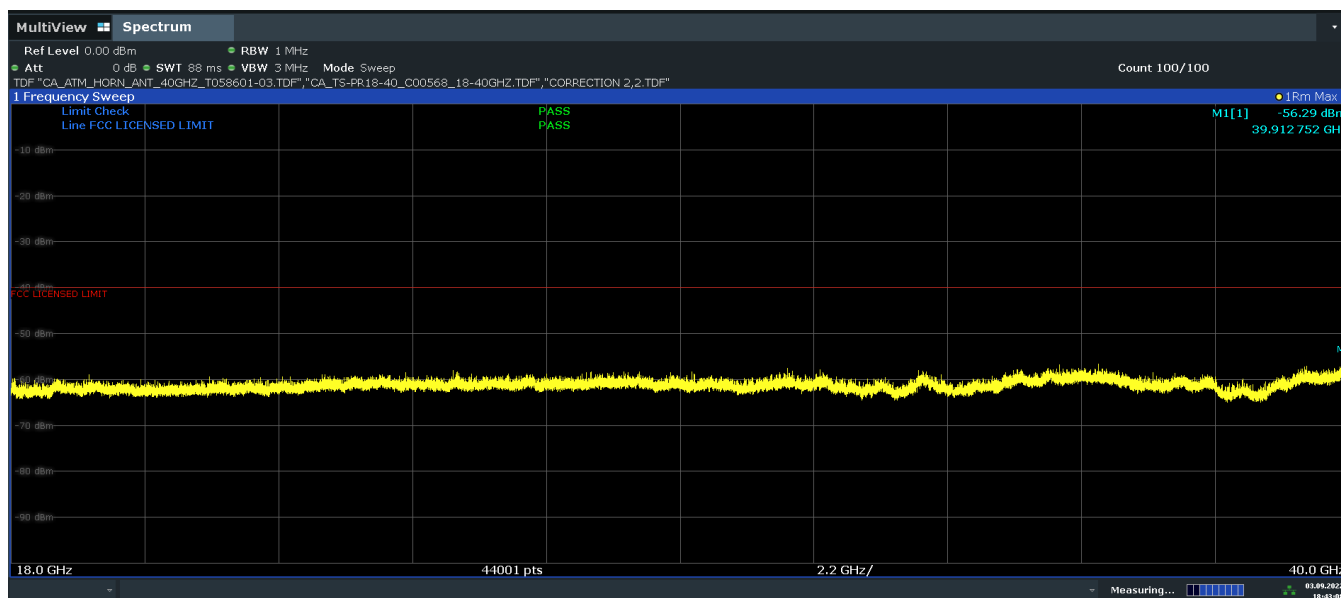

10:43:09 03.09.2022

**Plot 7-93. Radiated Spurious Plot 18 – 40GHz (ULCA Band 48, Ant. Pol V)**

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3560.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3579.8
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7120.0	H	-	-	-80.07	10.75	37.68	-57.58	-40.00	-17.58
10680.0	H	-	-	-83.03	15.79	39.76	-55.50	-40.00	-15.50
14240.0	H	-	-	-81.24	18.48	44.24	-51.02	-40.00	-11.02

**Table 7-25. Radiated Spurious Data (ULCA Band 48– Low Channel)**

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3625.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3644.8
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	H	-	-	-80.62	11.59	37.97	-57.28	-40.00	-17.28
10875.0	H	-	-	-83.20	15.46	39.26	-56.00	-40.00	-16.00
14500.0	H	-	-	-81.58	20.16	45.58	-49.67	-40.00	-9.67

**Table 7-26. Radiated Spurious Data (ULCA Band 48– Mid Channel)**


FCC ID: BCGA2435	PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device
		Page 79 of 94

V2.1 11/9/2021

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3690.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3670.2
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7380.0	H	-	-	-80.24	10.90	37.66	-57.60	-40.00	-17.60
11070.0	H	-	-	-82.31	15.98	40.67	-54.59	-40.00	-14.59
14760.0	H	-	-	-82.33	20.78	45.45	-49.80	-40.00	-9.80

**Table 7-27. Radiated Spurious Data (ULCA Band 48– High Channel)**

<b>FCC ID:</b> BCGA2435		<b>PART 96 MEASUREMENT REPORT</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090025-10-R3.BCG	<b>Test Dates:</b> 05/30/2022-09/09/2022	<b>EUT Type:</b> Tablet Device	Page 80 of 94

V2.1 11/9/2021

## 7.7.4 Antenna 2a Radiated Spurious Emissions Measurements

### LTE Band 48

Bandwidth (MHz):	20
Frequency (MHz):	3560.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7120.0	H	-	-	-79.33	8.93	36.60	-58.66	-40.00	-18.66
10680.0	H	-	-	-82.77	14.88	39.11	-56.15	-40.00	-16.15
14240.0	H	-	-	-83.00	19.01	43.01	-52.25	-40.00	-12.25

Table 7-28. Radiated Spurious Data (LTE Band 48 – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	3625.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	H	-	-	-79.24	8.96	36.72	-58.54	-40.00	-18.54
10875.0	H	-	-	-82.90	15.24	39.34	-55.92	-40.00	-15.92
14500.0	H	-	-	-83.55	19.82	43.27	-51.99	-40.00	-11.99

Table 7-29. Radiated Spurious Data (LTE Band 48 – Mid Channel)

Bandwidth (MHz):	20
Frequency (MHz):	3690.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7380.0	H	-	-	-79.55	9.33	36.78	-58.48	-40.00	-18.48
11070.0	H	-	-	-82.87	15.87	40.00	-55.26	-40.00	-15.26
14760.0	H	-	-	-84.33	20.82	43.49	-51.77	-40.00	-11.77

Table 7-30. Radiated Spurious Data (LTE Band 48 – High Channel)

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 81 of 94

V2.1 11/9/2021

## ULCA Band 48

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3560.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3579.8
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7120.0	H	-	-	-80.07	10.75	37.68	-57.58	-40.00	-17.58
10680.0	H	-	-	-83.03	15.79	39.76	-55.50	-40.00	-15.50
14240.0	H	-	-	-81.24	18.48	44.24	-51.02	-40.00	-11.02

Table 7-31. Radiated Spurious Data (ULCA Band 48– Low Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3625.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3644.8
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	H	-	-	-80.62	11.59	37.97	-57.28	-40.00	-17.28
10875.0	H	-	-	-83.20	15.46	39.26	-56.00	-40.00	-16.00
14500.0	H	-	-	-81.58	20.16	45.58	-49.67	-40.00	-9.67

Table 7-32. Radiated Spurious Data (ULCA Band 48– Mid Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3690.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3670.2
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7380.0	H	-	-	-80.24	10.90	37.66	-57.60	-40.00	-17.60
11070.0	H	-	-	-82.31	15.98	40.67	-54.59	-40.00	-14.59
14760.0	H	-	-	-82.33	20.78	45.45	-49.80	-40.00	-9.80

Table 7-33. Radiated Spurious Data (ULCA Band 48– High Channel)


FCC ID: BCGA2435	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device
		Page 82 of 94

V2.1 11/9/2021




## 7.7.5 Simultaneous Transmission


Description	Bluetooth	LTE
Antenna	2a	2a
Channel	79	55340
Operating Frequency (MHz)	2480	3560
Mode/Modulation	GFSK ePA	QPSK/1RB/20MHz

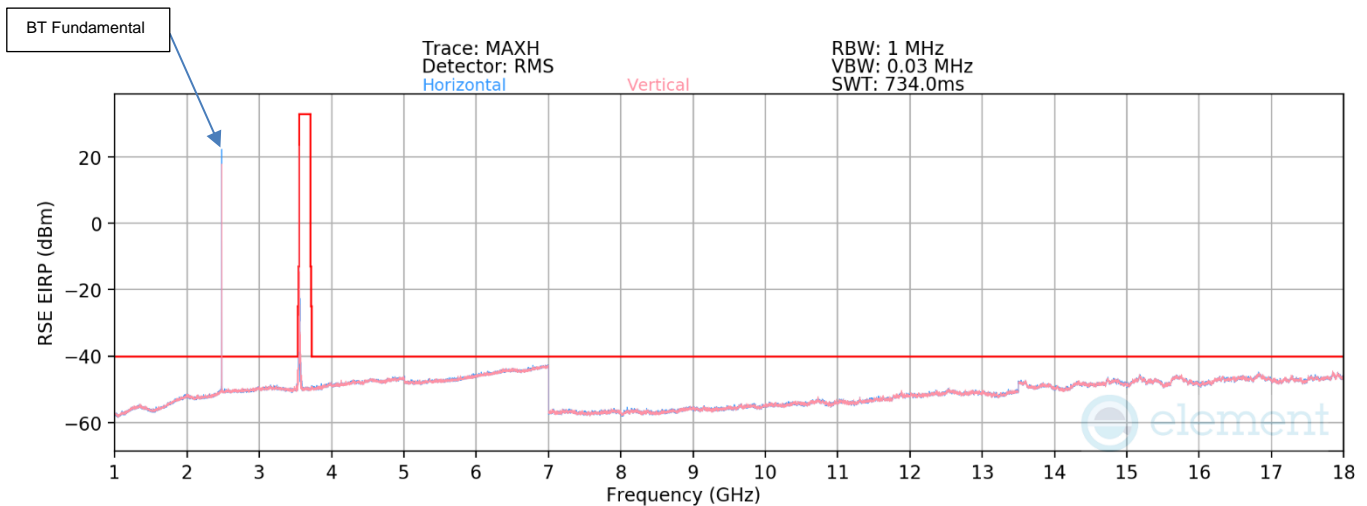

**Plot 7-94. Radiated Spurious Emissions – Simultaneous Transmission 1GHz-18GHz**

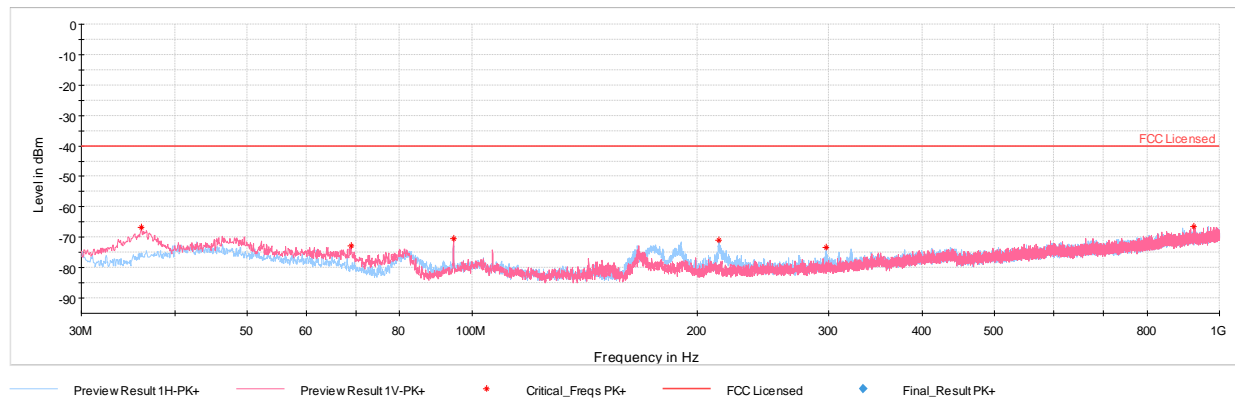


**Plot 7-95. Radiated Spurious Emissions – Simultaneous Transmission 30MHz - 1GHz**

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 83 of 94


V2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

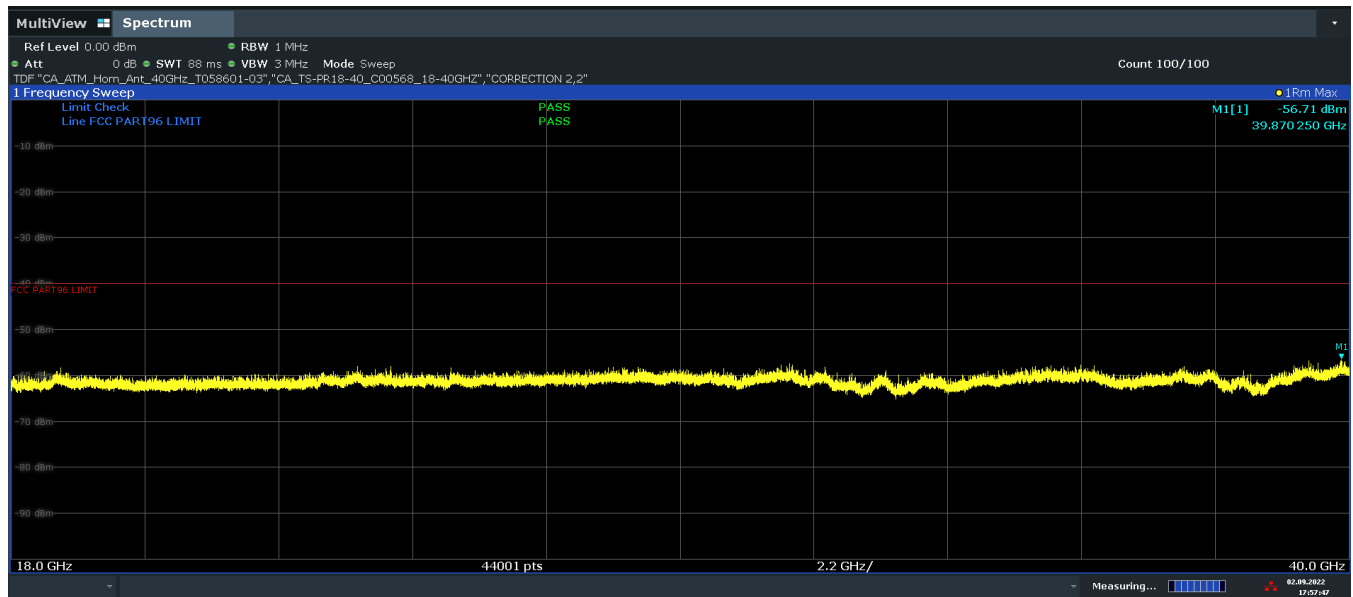


17:57:48 02.09.2022

**Plot 7-96. Radiated Spurious Emissions – Simultaneous Transmission 18GHz - 40GHz Pol. H**

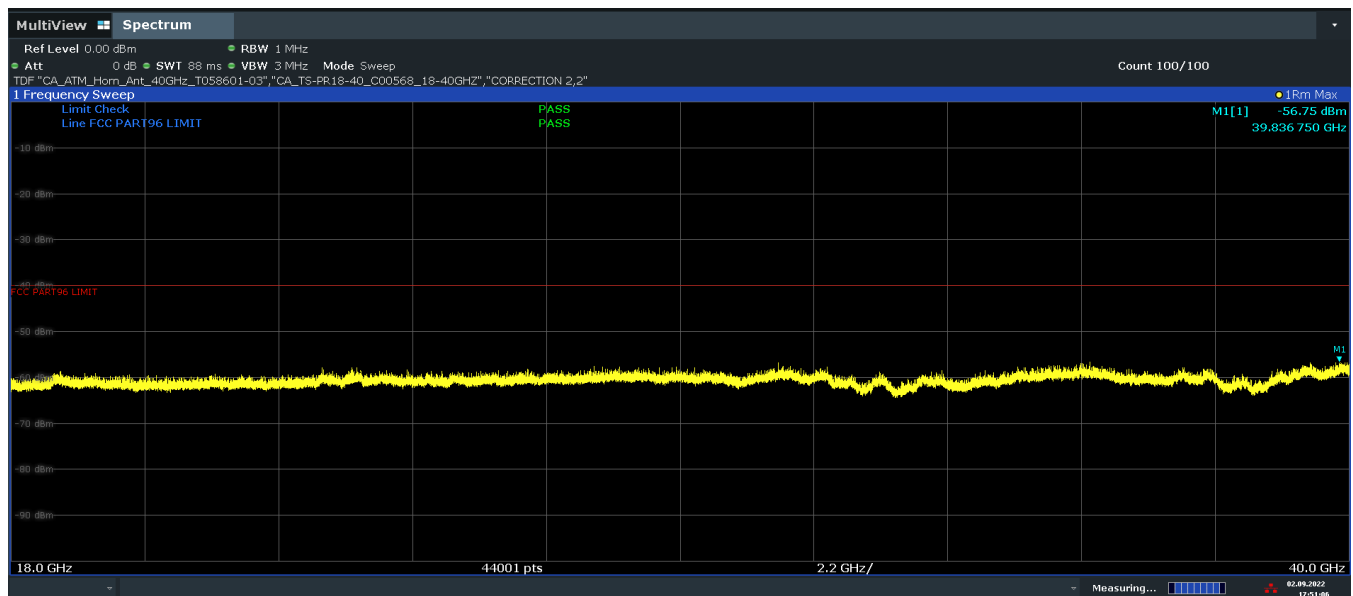

17:51:07 02.09.2022

**Plot 7-97. Radiated Spurious Emissions – Simultaneous Transmission 18GHz - 40GHz Pol. V**

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 84 of 94


Bandwidth (MHz):	20
Frequency (MHz):	3551.0
RB Config (Size / Offset):	1/0

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7102.0	V	--	--	-79.25	9.25	37.00	-58.25	-40.00	-18.25
10653.0	V	--	--	-82.33	14.52	39.19	-56.07	-40.00	-16.07
14204.0	V	--	--	-81.16	18.50	44.34	-50.91	-40.00	-10.91
17755.0	V	--	--	-83.24	22.50	46.26	-49.00	-40.00	-9.00
1409*	V	--	--	-74.64	6.64	39.00	-56.25	-40.00	-16.25
4922*	V	--	--	-77.10	13.84	43.74	-51.52	-40.00	-11.52

**Table 7-34. LTE Harmonics and Intermodulations (\*) Emissions Measurements in Simultaneous Transmission Mode**

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Peak	-	-	-	-66.44	14.00	54.56	73.98	-19.41
7440.00	Peak	-	-	-	-69.35	9.50	47.15	73.98	-26.83
12400.00	Peak	-	-	-	-73.33	17.45	51.12	73.98	-22.86

**Table 7-35. Bluetooth Harmonics Emissions Measurements in Simultaneous Transmission Mode**

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device		Page 85 of 94

V2.1 11/9/2021

## 7.8 Frequency Stability / Temperature Variation

### §2.1055

#### Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015 and TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

***For Part 96, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.***

#### Test Procedure Used


ANSI C63.26-2015

TIA-603-E-2016

#### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.


#### Test Setup

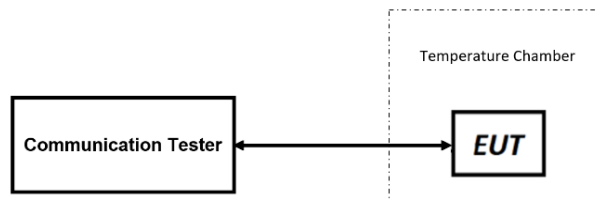

**Figure 7-7. Test Instrument & Measurement Setup**

#### Test Notes


All ports were tested and only the worst case data were reported.

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 86 of 94

## Frequency Stability / Temperature Variation

LTE Band 48							
Low Channel Frequency (Hz):			3,560,000,000				
High Channel Frequency (Hz):			3,690,000,000				
Ref. Voltage (VDC):			3.80				
Voltage (%)	Power (VDC)	Temp (°C)	Low Freq. (Hz)	High Freq. (Hz)	Low Freq. Dev. (Hz)	High Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	3,559,999,984	3,559,999,983	-16	-17	-0.000000478
		- 20	3,559,999,985	3,559,999,984	-15	-16	-0.000000449
		- 10	3,559,999,986	3,559,999,985	-14	-15	-0.000000421
		0	3,559,999,987	3,559,999,986	-13	-14	-0.000000393
		+ 10	3,559,999,987	3,559,999,988	-13	-12	-0.000000365
		+ 20 (Ref)	3,560,000,000	3,560,000,000	0	0	0.000000000
		+ 30	3,559,999,984	3,559,999,987	-16	-13	-0.000000449
		+ 40	3,559,999,989	3,559,999,991	-11	-9	-0.000000309
		+ 50	3,559,999,988	3,559,999,990	-12	-10	-0.000000337
Battery Endpoint	3.23	+ 20	3,559,999,989	3,559,999,991	-11	-9	-0.000000309

**Table 7-36. LTE Band 48 Frequency Stability Data**

FCC ID: BCGA2435	 <b>PART 96 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 87 of 94

V2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 7.9 End User Device Additional Requirement (CBSD Protocol)

\$96.47

### Test Overview and Limit

End user device additional requirements (CBSD Protocol) are tested per the test procedures listed below. During testing, the EUT is connected to a certified CBSD (Ruckus FCC ID: S9GQ910US00) as a companion device to show compliance with Part 96.47.

***End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.***

***An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.***

### Test Procedure Used

KDB 940660 D01 v03

WINNF-TS-0122 v1.0.2


### Test Setup/Method

The EUT was connected via an RF cable to a certified CBSD and spectrum analyzer. The following procedure is performed by applying WINNF-TS-0122 CBRS CBSD Test Specification.

1. Run#1:
  - a. Setup WINNF.PT.C.HBT.1 with 3685MHz – 3695MHz.
  - b. Enable AP service from Ruckus Cloud management.
  - c. Check EUT Tx frequency.
  - d. Disable AP service from Ruckus Cloud management and check EUT stop transmission within 10s.
2. Run#2:
  - a. Setup WINNF.PT.C.HBT.1 with 3615MHz – 3635MHz.
  - b. Enable AP service from Ruckus Cloud management.
  - c. Check EUT Tx frequency.
  - d. Disable AP service from Ruckus Cloud management and check EUT stop transmission within 10s.

### Test Notes

The EUT is an End User Device.


FCC ID: BCGA2435	 <b>PART 96 MEASUREMENT REPORT</b>	Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device
		Page 88 of 94

V2.1 11/9/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## Run#1:

- Tx Frequency Set: 3685 – 3695MHz
- MaxEIRP Set: 10dBm/MHz

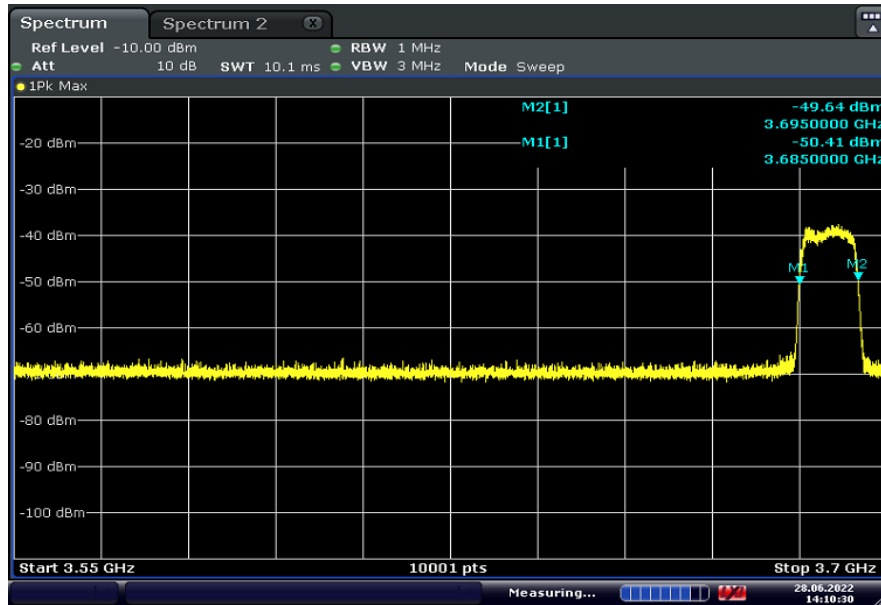

Plot 7-98. Run#1 End User Device Frequency of Operations

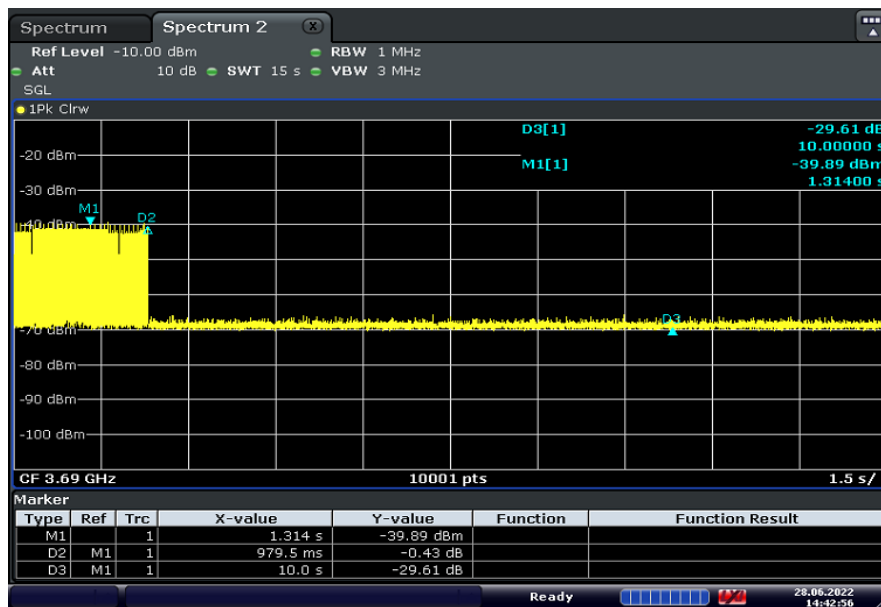


Plot 7-99. Run#1 End User Device Discontinues Operations within 10s

## Note:

Marker 1: CBSD sends instructions to discontinue LTE operations.

Marker 2: EUT discontinues operation.

Marker 3: 10 seconds elapsed time from CBSD sending instructions to EUT.


FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device	Page 89 of 94

V2.1 11/9/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## Run#2:

- Tx Frequency Set: 3615 – 3635MHz
- MaxEIRP Set: 10dBm/MHz

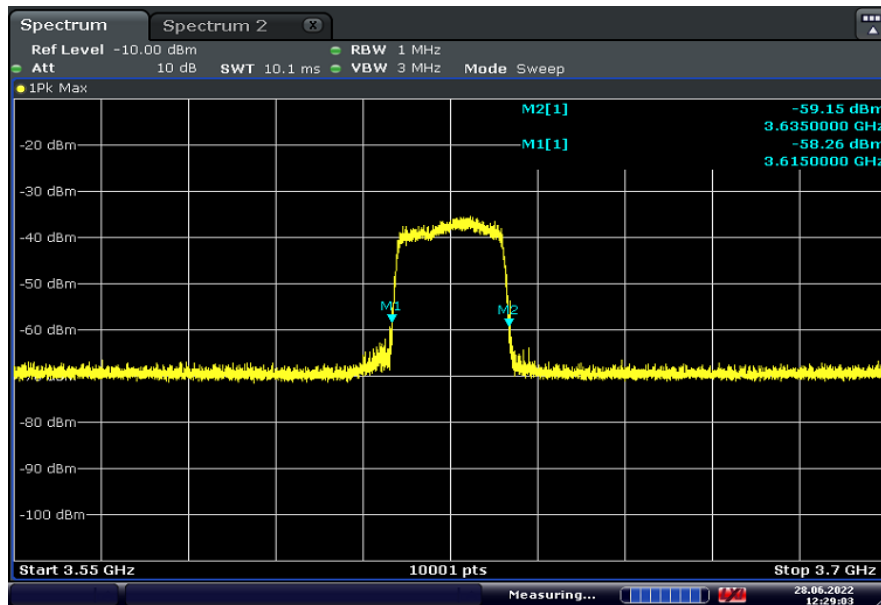

Plot 7-100. Run#2 End User Device Frequency of Operations

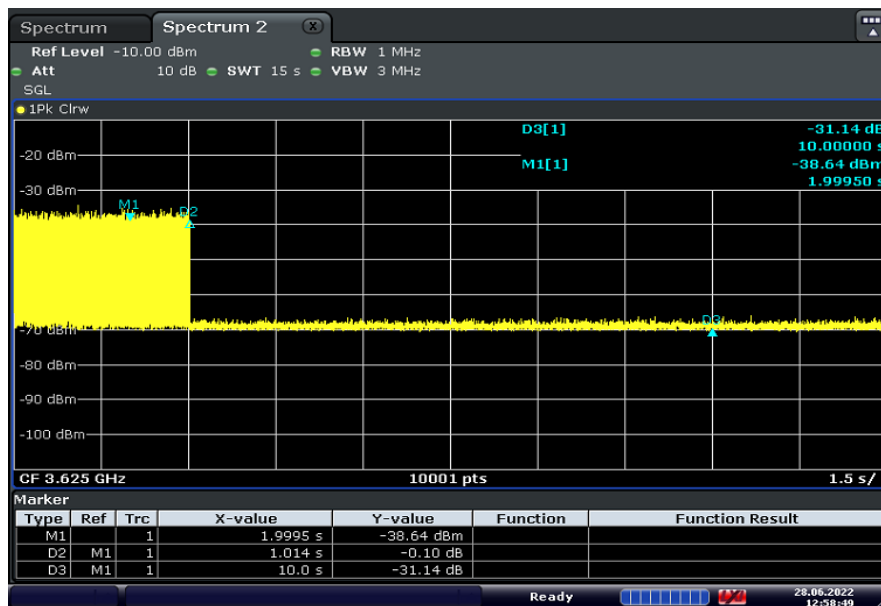


Plot 7-101. Run#2 End User Device Discontinues Operations within 10s

## Note:

Marker 1: CBSD sends instructions to discontinue LTE operations.

Marker 2: EUT discontinues operation.

Marker 3: 10 seconds elapsed time from CBSD sending instructions to EUT.

FCC ID: BCGA2435		PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090025-10-R3.BCG	Test Dates: 05/30/2022-09/09/2022	EUT Type: Tablet Device		Page 90 of 94


V2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).



## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the Apple **Tablet Devices FCC ID: BCGA2435** complies with all of the End User Device requirements of Part 96 of the FCC Rules for LTE operation only.

<b>FCC ID:</b> BCGA2435		<b>PART 96 MEASUREMENT REPORT</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090025-10-R3.BCG	<b>Test Dates:</b> 05/30/2022-09/09/2022	<b>EUT Type:</b> Tablet Device	Page 91 of 94

V2.1 11/9/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 9.0 APPENDIX A

The following antenna gains provided by manufacturer.

Band	Horizontal (dBi)	Vertical (dBi)
B1	0.6	0.6
B2	1.4	0.5
B3	2.1	0.7
B5	-3.3	-1.3
B7	-3.1	-2.7
B8	-2.2	-3.2
B11	0.1	-2
B13	-2.7	-3.0
B17	-2.5	-2.3
B20	-2.6	-1.7
B21	0.2	-1.9
B28	-2.2	-1.1
B30	-4.1	-3.8
B34	-1.6	0.3
B39	1.4	0.6
B40	-5.5	-1.2
B41	-5.6	-2.7
B42	-1.5	-0.1
B48	-1.5	0.0
B66	2.3	0.8
B71	-3.1	-3.6
Band	Horizontal (dBi)	Vertical (dBi)
n41	-5.6	-2.7
n70	2.0	0.7
n77	-1.8	-0.1
n78	-1.0	0.6
n79	-2.9	-0.6

**Table 9-1. Cellular Antenna 3 Gain; Type: IFA**


<b>FCC ID:</b> BCGA2435		<b>PART 96 MEASUREMENT REPORT</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090025-10-R3.BCG	<b>Test Dates:</b> 05/30/2022-09/09/2022	<b>EUT Type:</b> Tablet Device	Page 92 of 94

V2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

Band	Horizontal (dBi)	Vertical (dBi)
B1	1.3	1.1
B2	1.5	1.3
B3	0.5	-0.5
B5	-3.1	-2.6
B7	-3.1	-0.3
B8	-1.7	-2.8
B11	-1.1	-4
B13	-1.5	-1.9
B17	-2.4	-1.9
B20	-3.4	-2.6
B21	-1.4	-3.9
B28	-2.5	-1.9
B30	-2.8	-2.1
B34	-3.1	-0.8
B39	1.5	0.8
B40	-2.6	-2.1
B41	-3.2	-0.4
B42	-1.2	-3.4
B48	-1.2	-3.5
B66	0.4	-0.9
B71	-1.9	-2.1
n41	-3.2	-0.4
n70	-1.6	-1.9
n77	-0.6	-2.6
Band	Horizontal (dBi)	Vertical (dBi)
n78	-2.9	-2.6
n79	0.1	-0.3

**Table 9-2. Cellular Antenna 1 Gain; Type: IFA**

<b>FCC ID:</b> BCGA2435		<b>PART 96 MEASUREMENT REPORT</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090025-10-R3.BCG	<b>Test Dates:</b> 05/30/2022-09/09/2022	<b>EUT Type:</b> Tablet Device	Page 93 of 94

V2.1 11/9/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

Band	Horizontal (dBi)	Vertical (dBi)
B1	-3.5	-1.3
B2	-3.4	-2.7
B3	-3.7	-3.2
B7	-1.5	0.2
B30	-2.6	-0.3
B39	-3.7	-3
B40	-2.6	0.3
B41	-1.9	-0.4
B42	-2.6	-1
B48	-2.5	-1.6
B66	-3.4	-3.1
n41	-1.9	-0.4
n70	-3.4	-3.1
n77	-1.5	-2.6
n78	-1.6	-2.6
n79	0.1	0.3

**Table 9-3. Cellular Antenna 4b Gain; Type: IFA**

Band	Horizontal (dBi)	Vertical (dBi)
B42	2.2	1.9
B48	1.8	1.3
n77	-1.3	1.4
n78	-2.5	0.7
n79	-2	0.1

**Table 9-4. Cellular Antenna 2a Gain; Type: IFA**

<b>FCC ID:</b> BCGA2435		<b>PART 96 MEASUREMENT REPORT</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090025-10-R3.BCG	<b>Test Dates:</b> 05/30/2022-09/09/2022	<b>EUT Type:</b> Tablet Device	Page 94 of 94

V2.1 11/9/2021