



Mode:802.11ax - SUData Rate:MCS5Distance of Measurements:3 MetersOperating Frequency:2412MHzChannel:1

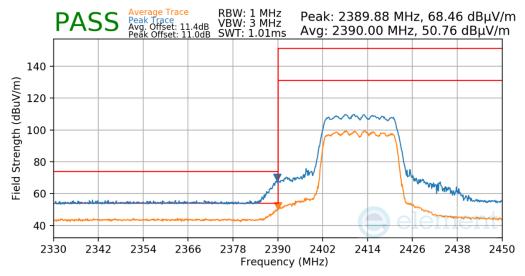

Plot 7-675. Radiated Restricted Lower Band Edge Measurement CDD

Mode:802.11ax - SUData Rate:MCS2Distance of Measurements:3 MetersOperating Frequency:2417MHzChannel:2

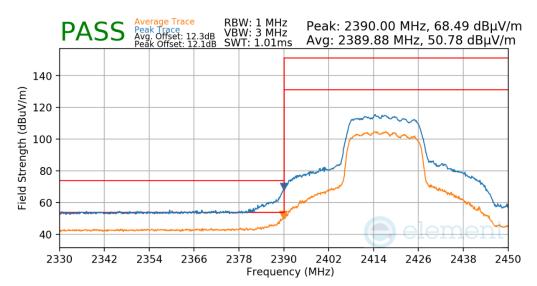


Plot 7-676. Radiated Restricted Lower Band Edge Measurement CDD

FCC ID: BCGA2435 IC: 579C-A2435	element)	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 404 of 424
1C2205090025-11.BCG	05/30/2022 - 09/03/2022	Tablet Device	Page 404 of 434




Mode:802.11ax - SUData Rate:MCS3Distance of Measurements:3 MetersOperating Frequency:2417MHzChannel:2

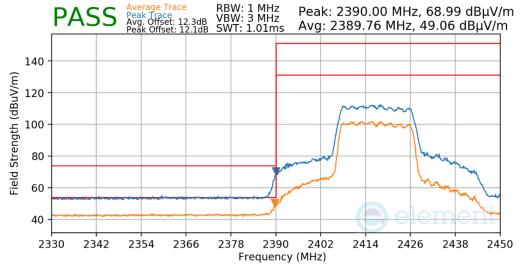

Plot 7-677. Radiated Restricted Lower Band Edge Measurement CDD

Mode:802.11ax - SUData Rate:MCS5Distance of Measurements:3 MetersOperating Frequency:2417MHzChannel:2

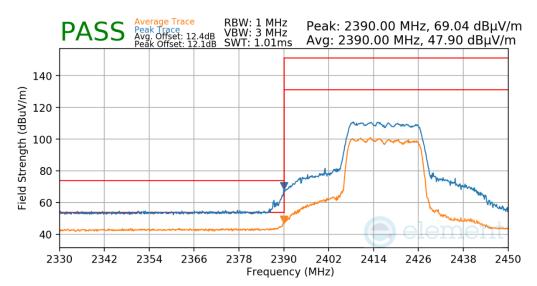


Plot 7-678. Radiated Restricted Lower Band Edge Measurement CDD

FCC ID: BCGA2435 IC: 579C-A2435	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 405 of 424
1C2205090025-11.BCG	05/30/2022 - 09/03/2022	Tablet Device	Page 405 of 434




Mode:802.11ax - SUData Rate:MCS2Distance of Measurements:3 MetersOperating Frequency:2422MHzChannel:3

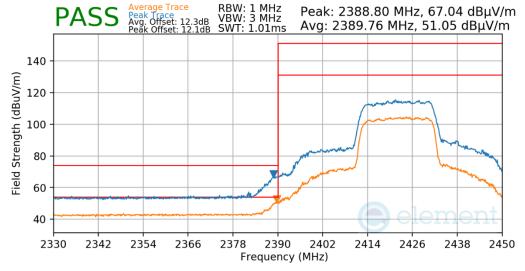

Plot 7-679. Radiated Restricted Lower Band Edge Measurement CDD

Mode:802.11ax - SUData Rate:MCS3Distance of Measurements:3 MetersOperating Frequency:2422MHzChannel:3

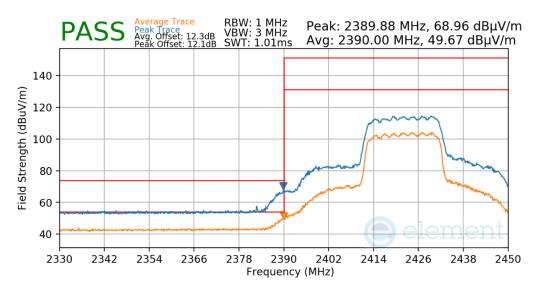


Plot 7-680. Radiated Restricted Lower Band Edge Measurement CDD

FCC ID: BCGA2435 IC: 579C-A2435	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 406 of 434
1C2205090025-11.BCG	05/30/2022 - 09/03/2022	Tablet Device	Page 406 01 434




Mode:802.11ax - SUData Rate:MCS5Distance of Measurements:3 MetersOperating Frequency:2422MHzChannel:3

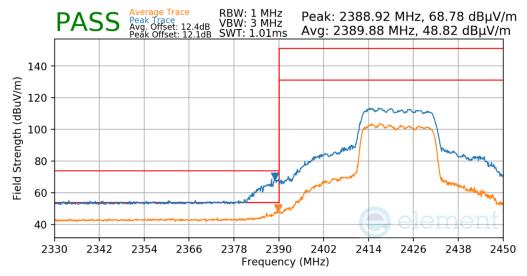

Plot 7-681. Radiated Restricted Lower Band Edge Measurement CDD

Mode:802.11ax - SUData Rate:MCS2Distance of Measurements:3 MetersOperating Frequency:2427MHzChannel:4

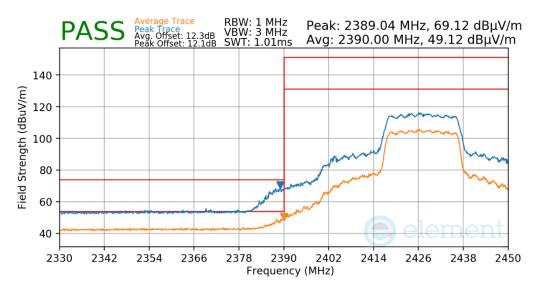

Plot 7-682. Radiated Restricted Lower Band Edge Measurement CDD

FCC ID: BCGA2435 IC: 579C-A2435	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 407 of 424
1C2205090025-11.BCG	05/30/2022 - 09/03/2022	Tablet Device	Page 407 of 434




 Mode:
 802.11ax - SU

 Data Rate:
 MCS3

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 2427MHz

 Channel:
 4

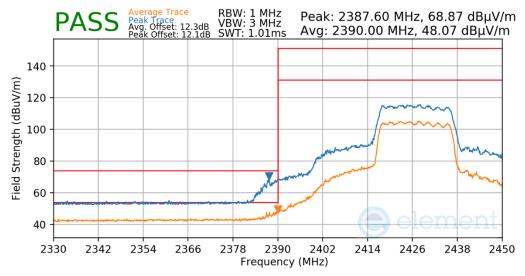

Plot 7-683. Radiated Restricted Lower Band Edge Measurement CDD


Mode: 802.11ax - SU

Data Rate: MCS5

Distance of Measurements: 3 Meters

Operating Frequency: 2427MHz

Channel: 4

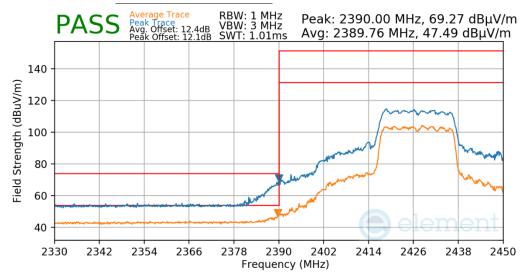


Plot 7-684. Radiated Restricted Lower Band Edge Measurement CDD

FCC ID: BCGA2435 IC: 579C-A2435	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 408 of 434
1C2205090025-11.BCG	05/30/2022 - 09/03/2022	Tablet Device	Fage 406 01 434




Mode:802.11ax - SUData Rate:MCS2Distance of Measurements:3 MetersOperating Frequency:2432MHzChannel:5

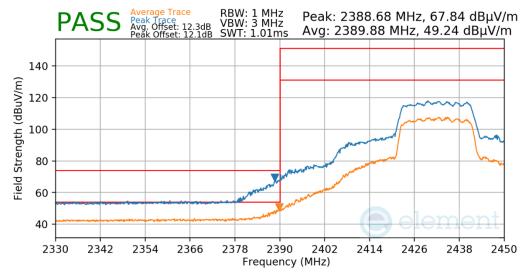

Plot 7-685. Radiated Restricted Lower Band Edge Measurement CDD

Mode:802.11ax - SUData Rate:MCS3Distance of Measurements:3 MetersOperating Frequency:2432MHzChannel:5

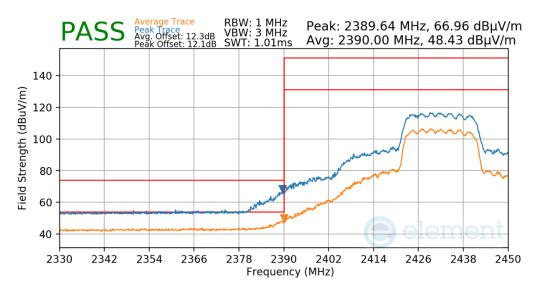


Plot 7-686. Radiated Restricted Lower Band Edge Measurement CDD

FCC ID: BCGA2435 IC: 579C-A2435	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 400 of 424
1C2205090025-11.BCG	05/30/2022 - 09/03/2022	Tablet Device	Page 409 of 434




Mode:802.11ax - SUData Rate:MCS5Distance of Measurements:3 MetersOperating Frequency:2432MHzChannel:5

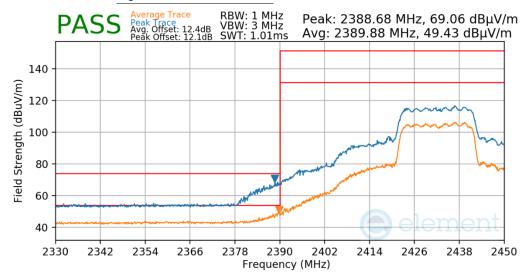

Plot 7-687. Radiated Restricted Lower Band Edge Measurement CDD

Mode:802.11ax - SUData Rate:MCS2Distance of Measurements:3 MetersOperating Frequency:2437MHzChannel:6 (low)

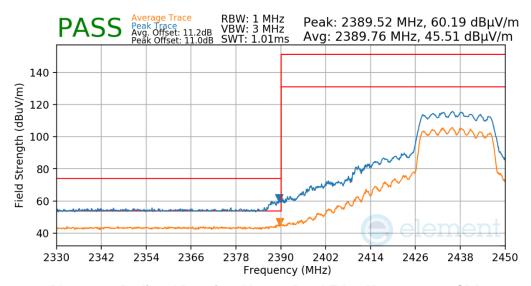


Plot 7-688. Radiated Restricted Lower Band Edge Measurement CDD

FCC ID: BCGA2435 IC: 579C-A2435	element)	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 410 of 424
1C2205090025-11.BCG	05/30/2022 - 09/03/2022	Tablet Device	Page 410 of 434




Mode:802.11ax - SUData Rate:MCS3Distance of Measurements:3 MetersOperating Frequency:2437MHzChannel:6 (low)

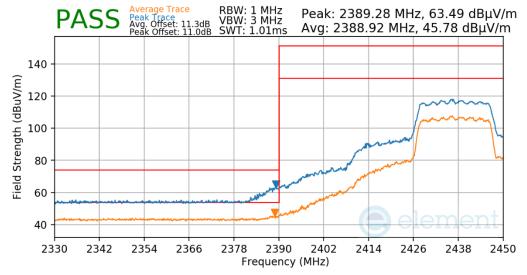

Plot 7-689. Radiated Restricted Lower Band Edge Measurement CDD

Mode:802.11ax - SUData Rate:MCS5Distance of Measurements:3 MetersOperating Frequency:2437MHzChannel:6 (low)

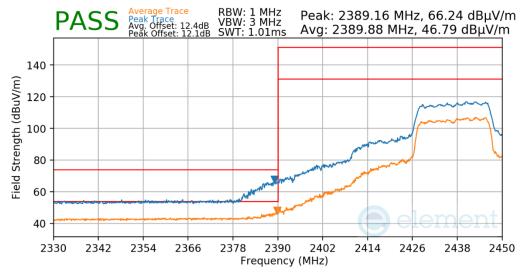


Plot 7-690. Radiated Restricted Lower Band Edge Measurement CDD

FCC ID: BCGA2435 IC: 579C-A2435	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 411 of 424
1C2205090025-11.BCG	05/30/2022 - 09/03/2022	Tablet Device	Page 411 of 434




Mode:802.11ax - SUData Rate:MCS2Distance of Measurements:3 MetersOperating Frequency:2437MHzChannel:6 (high)

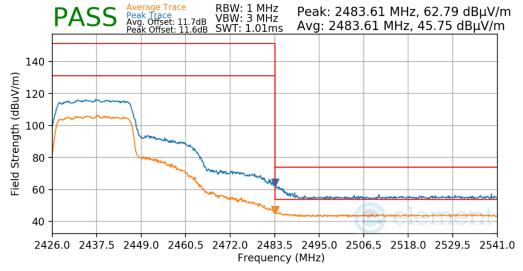

Plot 7-691. Radiated Restricted Upper Band Edge Measurement CDD

Mode:802.11ax - SUData Rate:MCS3Distance of Measurements:3 MetersOperating Frequency:2437MHzChannel:6 (high)

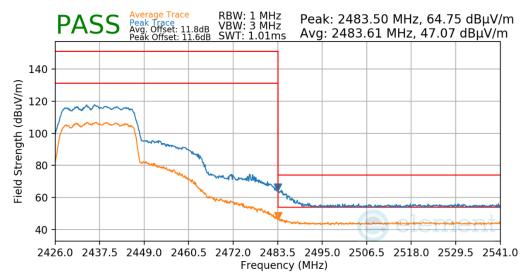


Plot 7-692. Radiated Restricted Upper Band Edge Measurement CDD

FCC ID: BCGA2435 IC: 579C-A2435	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 442 of 424
1C2205090025-11.BCG	05/30/2022 - 09/03/2022	Tablet Device	Page 412 of 434




Mode:802.11ax - SUData Rate:MCS5Distance of Measurements:3 MetersOperating Frequency:2437MHzChannel:6 (high)

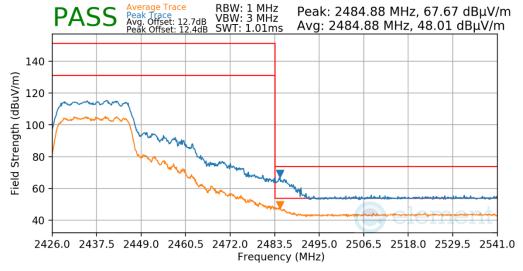

Plot 7-693. Radiated Restricted Upper Band Edge Measurement CDD

Mode:802.11ax - SUData Rate:MCS2Distance of Measurements:3 MetersOperating Frequency:2442MHzChannel:7

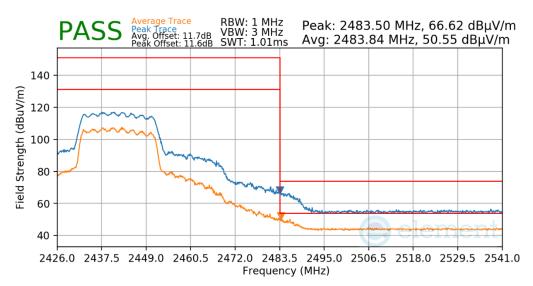


Plot 7-694. Radiated Restricted Upper Band Edge Measurement CDD

FCC ID: BCGA2435 IC: 579C-A2435	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dags 442 of 424
1C2205090025-11.BCG	05/30/2022 - 09/03/2022	Tablet Device	Page 413 of 434




Mode:802.11ax - SUData Rate:MCS3Distance of Measurements:3 MetersOperating Frequency:2442MHzChannel:7

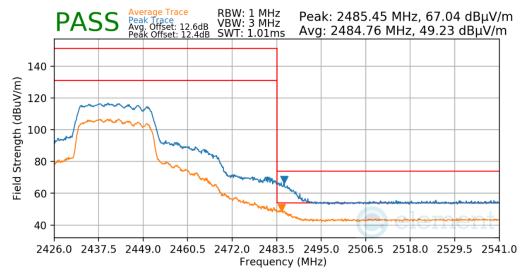

Plot 7-695. Radiated Restricted Upper Band Edge Measurement CDD

Mode:802.11ax - SUData Rate:MCS5Distance of Measurements:3 MetersOperating Frequency:2442MHzChannel:7

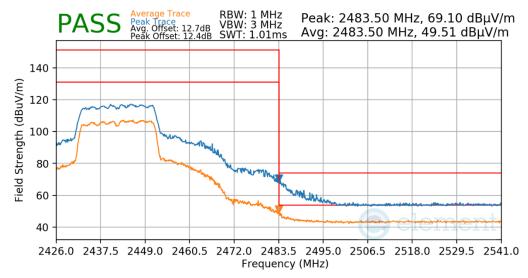


Plot 7-696. Radiated Restricted Upper Band Edge Measurement CDD

FCC ID: BCGA2435 IC: 579C-A2435	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 414 of 424
1C2205090025-11.BCG	05/30/2022 - 09/03/2022	Tablet Device	Page 414 of 434




Mode:802.11ax - SUData Rate:MCS2Distance of Measurements:3 MetersOperating Frequency:2447MHzChannel:8

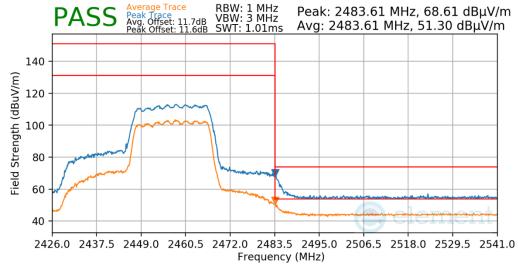

Plot 7-697. Radiated Restricted Upper Band Edge Measurement CDD

Mode:802.11ax - SUData Rate:MCS3Distance of Measurements:3 MetersOperating Frequency:2447MHzChannel:8

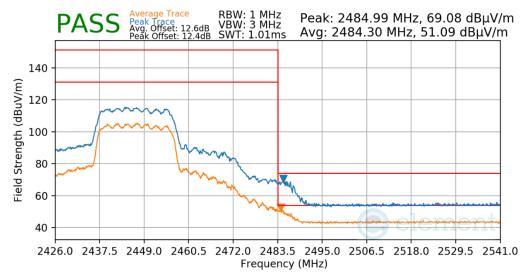


Plot 7-698. Radiated Restricted Upper Band Edge Measurement CDD

FCC ID: BCGA2435 IC: 579C-A2435	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 445 of 424
1C2205090025-11.BCG	05/30/2022 - 09/03/2022	Tablet Device	Page 415 of 434



Mode:802.11ax - SUData Rate:MCS5Distance of Measurements:3 MetersOperating Frequency:2447MHzChannel:8

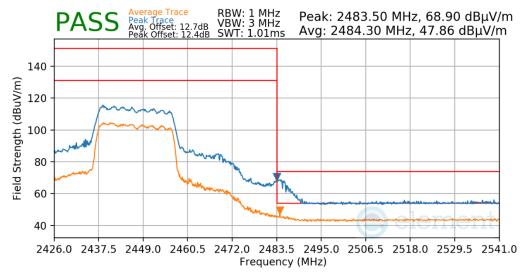

Plot 7-699. Radiated Restricted Upper Band Edge Measurement CDD


 Mode:
 802.11ax - SU

 Data Rate:
 MCS2

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 2452MHz

 Channel:
 9

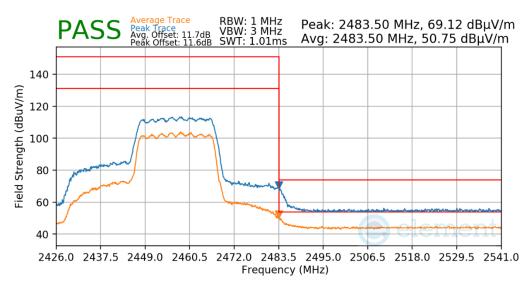


Plot 7-700. Radiated Restricted Upper Band Edge Measurement CDD

FCC ID: BCGA2435 IC: 579C-A2435	element	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogo 416 of 424
1C2205090025-11.BCG	05/30/2022 - 09/03/2022	Tablet Device	Page 416 of 434




Mode:802.11ax - SUData Rate:MCS3Distance of Measurements:3 MetersOperating Frequency:2452MHzChannel:9

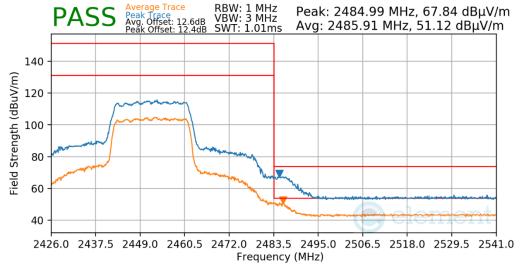

Plot 7-701. Radiated Restricted Upper Band Edge Measurement CDD

Mode:802.11ax - SUData Rate:MCS5Distance of Measurements:3 MetersOperating Frequency:2452MHzChannel:9

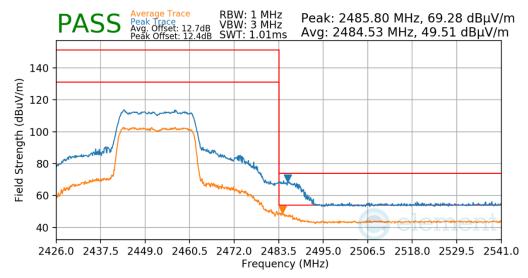

Plot 7-702. Radiated Restricted Upper Band Edge Measurement CDD

FCC ID: BCGA2435 IC: 579C-A2435	element	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogo 417 of 424
1C2205090025-11.BCG	05/30/2022 - 09/03/2022	Tablet Device	Page 417 of 434




 Mode:
 802.11ax - SU

 Data Rate:
 MCS2

 Distance of Measurements:
 3 Meters


 Operating Frequency:
 2457MHz

 Channel:
 10

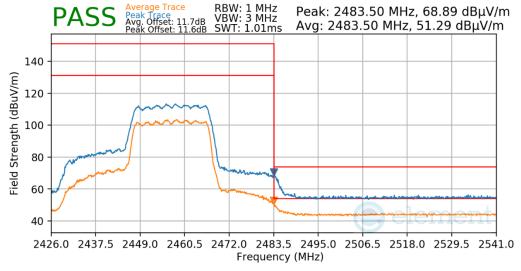

Plot 7-703. Radiated Restricted Upper Band Edge Measurement CDD

Mode:802.11ax - SUData Rate:MCS3Distance of Measurements:3 MetersOperating Frequency:2457MHzChannel:10

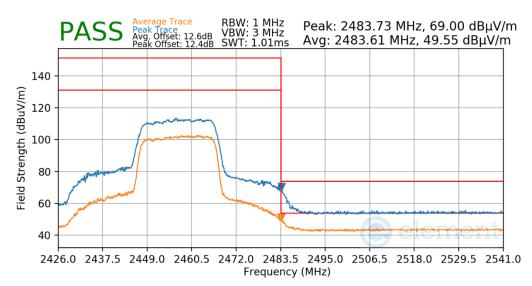

Plot 7-704. Radiated Restricted Upper Band Edge Measurement CDD

FCC ID: BCGA2435 IC: 579C-A2435	element	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 418 of 434
1C2205090025-11.BCG	05/30/2022 - 09/03/2022	Tablet Device	Page 418 01 434




 Mode:
 802.11ax - SU

 Data Rate:
 MCS5

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 2457MHz

 Channel:
 10

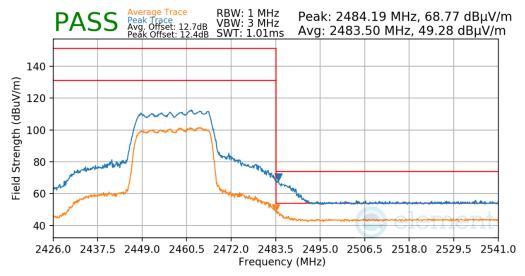

Plot 7-705. Radiated Restricted Upper Band Edge Measurement CDD


 Mode:
 802.11ax - SU

 Data Rate:
 MCS2

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 2462MHz

 Channel:
 11

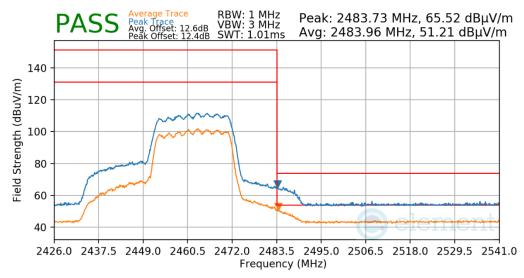


Plot 7-706. Radiated Restricted Upper Band Edge Measurement CDD

FCC ID: BCGA2435 IC: 579C-A2435	element	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogo 410 of 424
1C2205090025-11.BCG	05/30/2022 - 09/03/2022	Tablet Device	Page 419 of 434




Mode:802.11ax - SUData Rate:MCS3Distance of Measurements:3 MetersOperating Frequency:2462MHzChannel:11

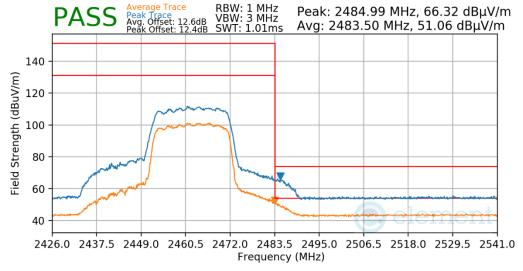

Plot 7-707. Radiated Restricted Upper Band Edge Measurement CDD

Mode:802.11ax - SUData Rate:MCS5Distance of Measurements:3 MetersOperating Frequency:2462MHzChannel:11

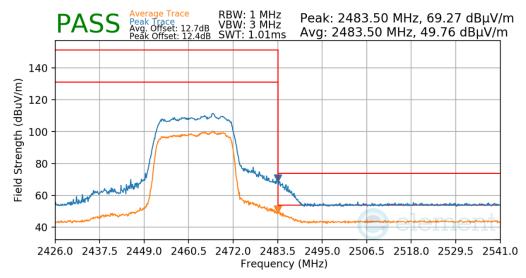

Plot 7-708. Radiated Restricted Upper Band Edge Measurement CDD

FCC ID: BCGA2435 IC: 579C-A2435	element	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogo 420 of 424
1C2205090025-11.BCG	05/30/2022 - 09/03/2022	Tablet Device	Page 420 of 434




 Mode:
 802.11ax - SU

 Data Rate:
 MCS2

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 2467MHz

 Channel:
 12

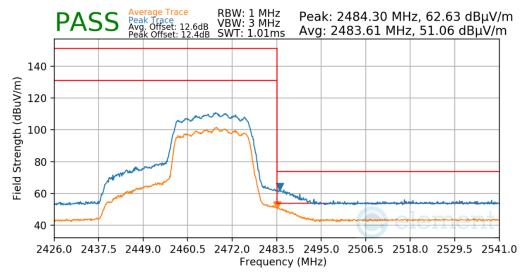

Plot 7-709. Radiated Restricted Upper Band Edge Measurement CDD


 Mode:
 802.11ax - SU

 Data Rate:
 MCS3

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 2467MHz

 Channel:
 12

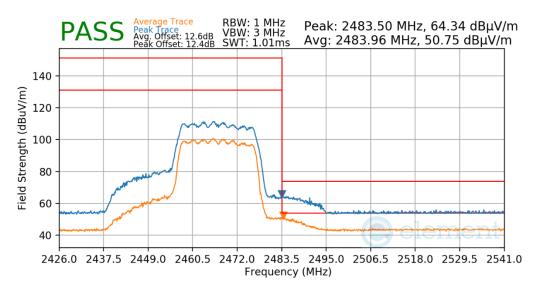

Plot 7-710. Radiated Restricted Upper Band Edge Measurement CDD

FCC ID: BCGA2435 IC: 579C-A2435	element	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogo 404 of 404
1C2205090025-11.BCG	05/30/2022 - 09/03/2022	Tablet Device	Page 421 of 434




 Mode:
 802.11ax - SU

 Data Rate:
 MCS5

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 2467MHz

 Channel:
 12

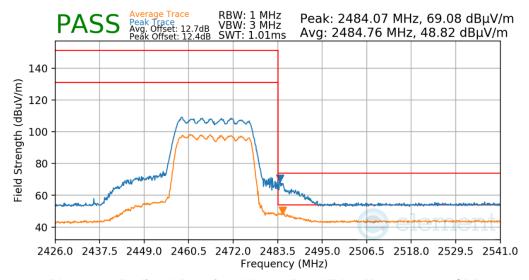

Plot 7-711. Radiated Restricted Upper Band Edge Measurement CDD

FCC ID: BCGA2435 IC: 579C-A2435	element)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 422 of 434
1C2205090025-11.BCG	05/30/2022 - 09/03/2022	Tablet Device	Page 422 01 434



# 7.8 Radiated Spurious Emissions – Below 1GHz §15.209; RSS-Gen [8.9]

### **Test Overview and Limit**

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-66 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [µV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-66. Radiated Limits

### **Test Procedures Used**

ANSI C63.10-2013

### **Test Settings**

### **Quasi-Peak Field Strength Measurements**

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 120kHz (for emissions from 30MHz 1GHz)
- 3. Detector = quasi-peak
- 4. Sweep time = auto couple
- Trace mode = max hold
- 6. Trace was allowed to stabilize

#### **Peak Field Strength Measurements**

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- RBW = 120kHz (for emissions from 30MHz 1GHz)
- 3. VBW = 300kHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold

FCC ID: BCGA2435 IC: 579C-A2435	element	element MEASUREMENT REPORT (CERTIFICATION)		
Test Report S/N:	Test Dates:	EUT Type:	Dogg 400 of 404	
1C2205090025-11.BCG	05/30/2022 - 09/03/2022	Tablet Device	Page 423 of 434	



## **Test Setup**

The EUT and measurement equipment were set up as shown in the diagrams below.

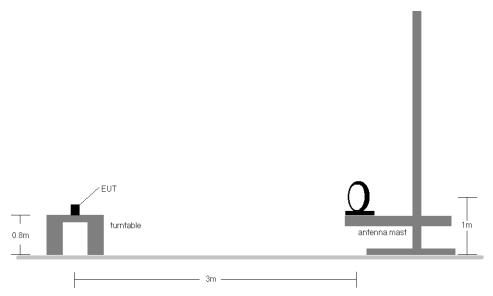


Figure 7-7. Radiated Test Setup < 30Mhz

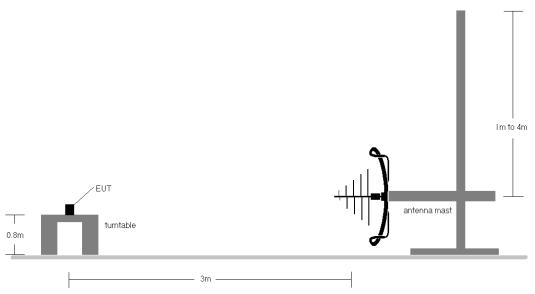


Figure 7-8. Radiated Test Setup < 1GHz

FCC ID: BCGA2435 IC: 579C-A2435	element)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 424 of 434
1C2205090025-11.BCG	05/30/2022 - 09/03/2022	Tablet Device	Fage 424 01 434



### **Test Notes**

- 1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen(8.10) are below the limit shown in Table 7-66.
- The broadband receive antenna is manipulated through vertical and horizontal polarizations during the
  tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was
  positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst
  case emissions.
- 3. This unit was tested with its standard battery.
- 4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6dB of the limit.
- 5. Emissions were measured at a 3 meter test distance.
- 6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
- 7. No spurious emissions were detected within 20dB of the limit below 30MHz.
- 8. Both configurations below were investigated, and the worst case has been reported.
  - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
  - b. EUT powered by host PC via USB-C cable with wire charger
- 9. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
- 10. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification.
- 11. The unit was tested with all possible modes and only the highest emission is reported.
- 12. All antenna configurations were investigated and only the worst case is reported.

### **Sample Calculations**


### **Determining Spurious Emissions Levels**

- Field Strength Level [dBμV/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] Preamplifier Gain [dB]
- Margin [dB] = Field Strength Level [dBμV/m] Limit [dBμV/m]

FCC ID: BCGA2435 IC: 579C-A2435	element	lement MEASUREMENT REPORT (CERTIFICATION)		
Test Report S/N:	Test Dates:	EUT Type:	Dogg 405 of 404	
1C2205090025-11.BCG	05/30/2022 - 09/03/2022	Tablet Device	Page 425 of 434	



# CDD Radiated Spurious Emissions Measurements (Below 1GHz) §15.209; RSS-Gen [8.9]

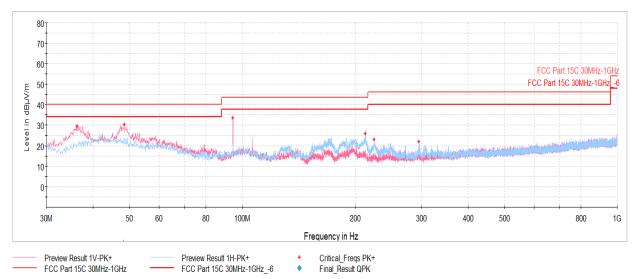


Plot 7-712. Radiated Spurious Emissions below 1GHz CDD 11n Ch.6, with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
36.26	Max Peak	V	100	64	-59.17	-18.39	29.44	40.00	-10.56
48.48	Max Peak	V	100	11	-61.35	-15.46	30.19	40.00	-9.81
94.46	Max Peak	V	100	233	-54.39	-19.06	33.55	43.52	-9.97
212.60	Max Peak	Н	100	15	-63.04	-17.98	25.98	43.52	-17.54
224.44	Max Peak	Н	100	7	-66.68	-17.22	23.10	46.02	-22.92
295.63	Max Peak	Н	100	15	-69.55	-15.28	22.17	46.02	-23.85

Table 7-67. Radiated Spurious Emissions below 1GHz CDD 11n Ch.6, with AC/DC Adapter

FCC ID: BCGA2435 IC: 579C-A2435	element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 426 of 434
1C2205090025-11.BCG	05/30/2022 - 09/03/2022	Tablet Device	Fage 420 01 434



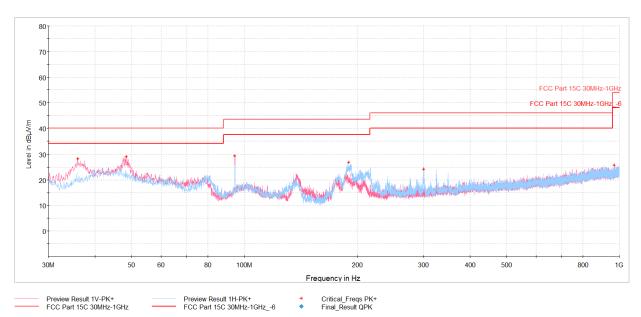

Plot 7-713. Radiated Spurious Emissions below 1GHz CDD 11ax - SU Ch.6, with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
35.97	Max Peak	V	100	358	-60.22	-18.46	28.32	40.00	-11.68
48.43	Max Peak	V	100	347	-62.54	-15.46	29.00	40.00	-11.00
94.46	Max Peak	V	100	216	-58.61	-19.06	29.33	43.52	-14.19
189.61	Max Peak	Н	100	245	-61.56	-18.54	26.90	43.52	-16.62
300.58	Max Peak	Н	100	285	-67.39	-15.36	24.25	46.02	-21.77
967.65	Max Peak	Н	100	183	-77.49	-3.84	25.67	53.98	-28.31

Table 7-68. Radiated Spurious Emissions below 1GHz CDD 11ax - SU Ch.6, with AC/DC Adapter

FCC ID: BCGA2435 IC: 579C-A2435	element	element MEASUREMENT REPORT (CERTIFICATION)	
Test Report S/N:	Test Dates:	EUT Type:	Dogg 407 of 404
1C2205090025-11.BCG	05/30/2022 - 09/03/2022	Tablet Device	Page 427 of 434



# 7.9 AC Line-Conducted Emissions Measurement §15.207; RSS-Gen [8.8]

### **Test Overview and Limit**

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission	Conducted Limit (dBμV)			
(MHz)	Quasi-peak	Average		
0.15 – 0.5	66 to 56*	56 to 46*		
0.5 – 5	56	46		
5 – 30	60	50		

Table 7-69. Conducted Limits

### **Test Procedures Used**

ANSI C63.10-2013, Subclause 6.2

### **Test Settings**

## **Quasi-Peak Measurements**

- 1. Analyzer center frequency was set to the frequency of the spurious emission of interest
- RBW = 9kHz (for emissions from 150kHz 30MHz)
- 3. Detector = quasi-peak
- 4. Sweep time = auto couple
- 5. Trace mode = max hold
- 6. Trace was allowed to stabilize

## **Average Measurements**

- 1. Analyzer center frequency was set to the frequency of the spurious emission of interest
- 2. RBW = 9kHz (for emissions from 150kHz 30MHz)
- 3. Detector = RMS
- 4. Sweep time = auto couple
- 5. Trace mode = max hold
- 6. Trace was allowed to stabilize

FCC ID: BCGA2435 IC: 579C-A2435	element	element MEASUREMENT REPORT (CERTIFICATION)		
Test Report S/N:	Test Dates:	EUT Type:	Page 428 of 434	
1C2205090025-11.BCG	05/30/2022 - 09/03/2022	Tablet Device	Faye 420 01 434	

<sup>\*</sup>Decreases with the logarithm of the frequency.



### **Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

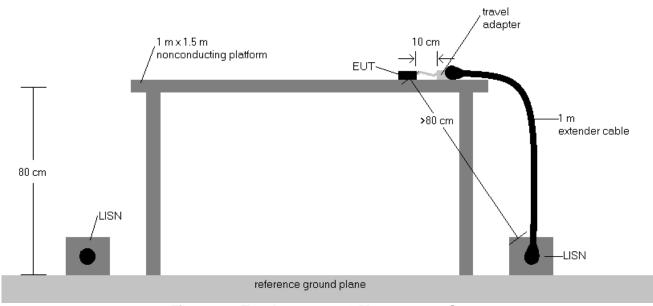



Figure 7-9. Test Instrument & Measurement Setup

### **Test Notes**

- 1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
- 2. Both configurations below were investigated, and the worst case has been reported.
  - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
  - b. EUT powered by host PC via USB-C cable with wire charger
- 3. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
- 4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
- 6. Margin (dB) = QP/AV Level (dB $\mu$ V) QP/AV Limit (dB $\mu$ V)
- 7. Traces shown in plot are made using quasi peak and average detectors.
- 8. Deviations to the Specifications: None.

FCC ID: BCGA2435 IC: 579C-A2435	element	element MEASUREMENT REPORT (CERTIFICATION)		
Test Report S/N:	Test Dates:	EUT Type:	Dogg 420 of 424	
1C2205090025-11.BCG	05/30/2022 - 09/03/2022	Tablet Device	Page 429 of 434	



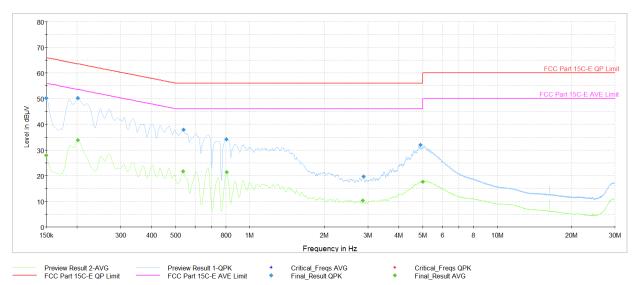

Plot 7-714. AC Line Conducted Plot with CDD 11n Ch.6 (L1, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dB <b>µ</b> V]	Averaqe [dBµV]	Limit [dBµV]	Marqin [dB]	Line	PE
0.150	FINAL	_	27.96	56.00	-28.04	L1	GND
0.150	FINAL	50.2	_	66.00	-15.79	L1	GND
0.202	FINAL	_	33.85	53.54	-19.68	L1	GND
0.202	FINAL	50.2	_	63.54	-13.33	L1	GND
0.537	FINAL	_	21.74	46.00	-24.26	L1	GND
0.539	FINAL	37.8	_	56.00	-18.20	L1	GND
0.805	FINAL	34.3	_	56.00	-21.73	L1	GND
0.807	FINAL	_	21.37	46.00	-24.63	L1	GND
2.864	FINAL	_	10.31	46.00	-35.69	L1	GND
2.877	FINAL	19.7	_	56.00	-36.32	L1	GND
4.895	FINAL	32.0	_	56.00	-24.02	L1	GND
5.012	FINAL	_	17.73	50.00	-32.27	L1	GND

Table 7-70. AC Line Conducted Data with CDD 11n Ch.6 (L1, with AC/DC Adapter)

FCC ID: BCGA2435 IC: 579C-A2435	element	element MEASUREMENT REPORT (CERTIFICATION)	
Test Report S/N:	Test Dates:	EUT Type:	Dogg 420 of 424
1C2205090025-11.BCG	05/30/2022 - 09/03/2022	Tablet Device	Page 430 of 434