


Plot 7-62. RSE 1-18GHz Antenna 5b (BDR GFSK ePA – 5204MHz)

Mode: BDR
 Data Rate: 1Mbps
 Power Scheme: ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 5204MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
10408.00	Peak	H	-	-	-71.75	15.46	50.71	68.20	-17.49
*	Average	H	-	-	-84.25	20.13	42.88	53.98	-11.09
*	Peak	H	-	-	-72.29	20.13	54.84	73.98	-19.13

Table 7-17. Radiated Measurements Antenna 5b

FCC ID: BCGA2764	 element MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device	Page 64 of 100	

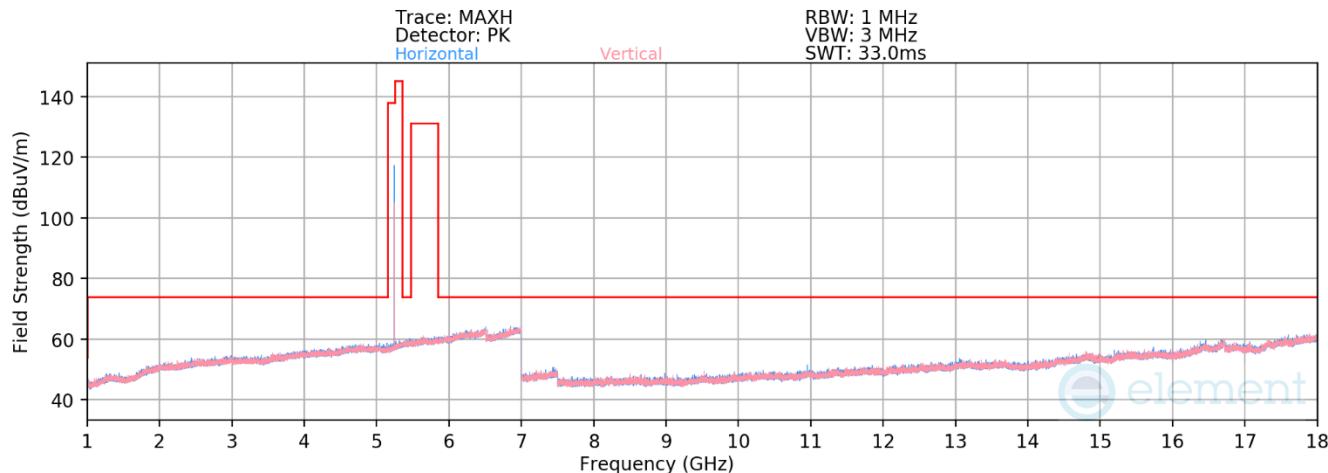


Plot 7-63. RSE 1-18GHz Antenna 5b (BDR GFSK ePA – 5245MHz)

Mode: BDR
 Data Rate: 1Mbps
 Power Scheme: ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 5245MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
10490.00	Peak	H	-	-	-71.16	14.98	50.82	68.20	-17.38
* 15735.00	Average	H	-	-	-84.34	21.37	44.03	53.98	-9.95
* 15735.00	Peak	H	-	-	-72.31	21.37	56.06	73.98	-17.92

Table 7-18. Radiated Measurements Antenna 5b

FCC ID: BCGA2764	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device	Page 65 of 100

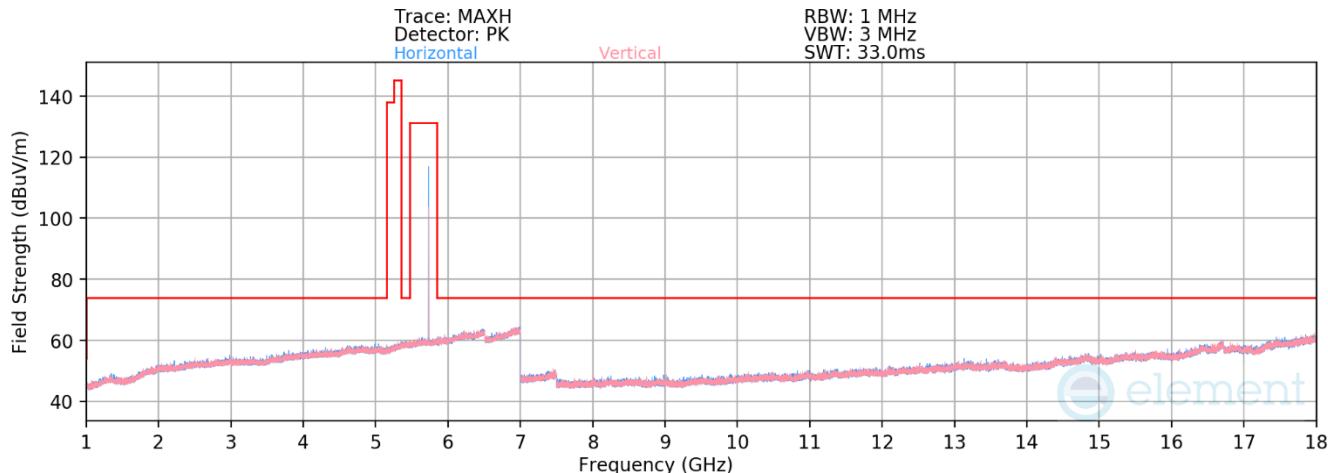


Plot 7-64. RSE 1-18GHz Antenna 5b (BDR GFSK ePA – 5733MHz)

Mode: BDR
 Data Rate: 1Mbps
 Power Scheme: ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 5733MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
* 11466.00	Average	H	-	-	-83.95	13.30	36.35	53.98	-17.63
* 11466.00	Peak	H	-	-	-72.39	13.30	47.91	73.98	-26.07
17199.00	Peak	H	-	-	-72.89	22.01	56.12	68.20	-12.08

Table 7-19. Radiated Measurements Antenna 5b

FCC ID: BCGA2764	 element	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device			

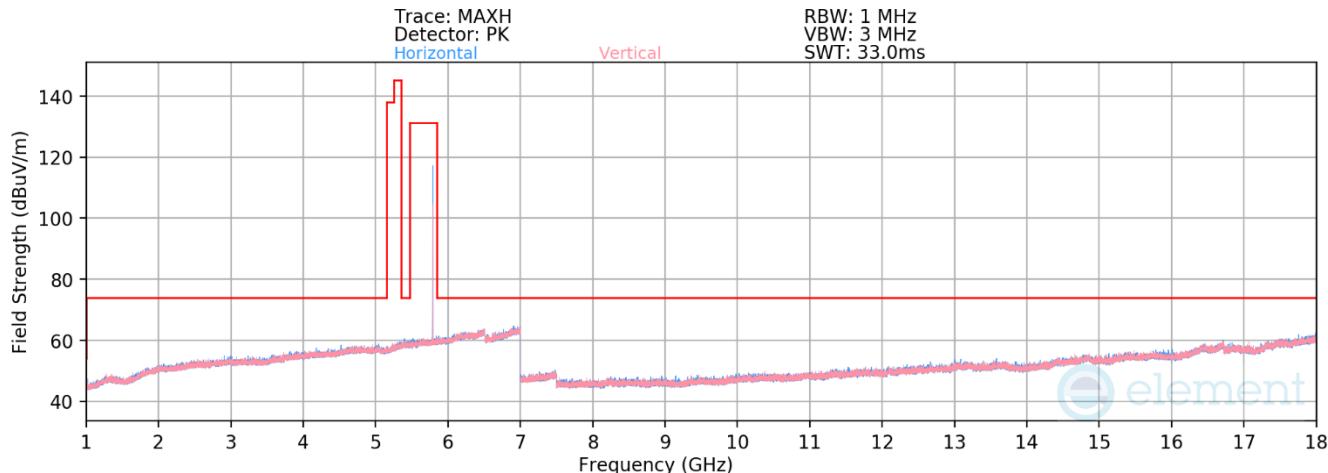

Plot 7-65. RSE 1-18GHz Antenna 5b (BDR GFSK ePA – 5789MHz)

Mode: BDR
 Data Rate: 1Mbps
 Power Scheme: ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 5789MHz

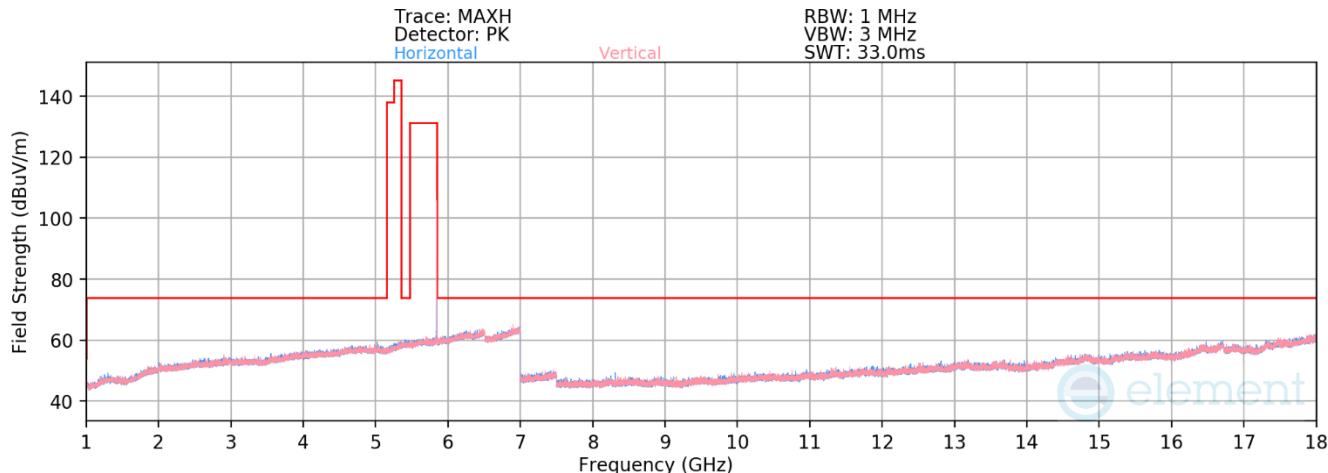
Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
11578.00	Average	H	-	-	-84.01	13.45	36.44	53.98	-17.54
11578.00	Peak	H	-	-	-72.58	13.45	47.87	73.98	-26.11
17367.00	Peak	H	-	-	-73.16	22.80	56.64	68.20	-11.56

Table 7-20. Radiated Measurements Antenna 5b

FCC ID: BCGA2764	 element	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device			

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


Plot 7-66. RSE 1-18GHz Antenna 5b (BDR GFSK ePA – 5844MHz)


Mode: BDR
 Data Rate: 1Mbps
 Power Scheme: ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 5844MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
11688.00	Average	H	-	-	-84.02	13.74	36.72	53.98	-17.26
11688.00	Peak	H	-	-	-72.52	13.74	48.22	73.98	-25.76
17532.00	Peak	H	-	-	-73.72	23.75	57.03	68.20	-11.17

Table 7-21. Radiated Measurements Antenna 5b

FCC ID: BCGA2764	 element	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device			Page 68 of 100

7.6.2 Antenna 4a Radiated Spurious Emission

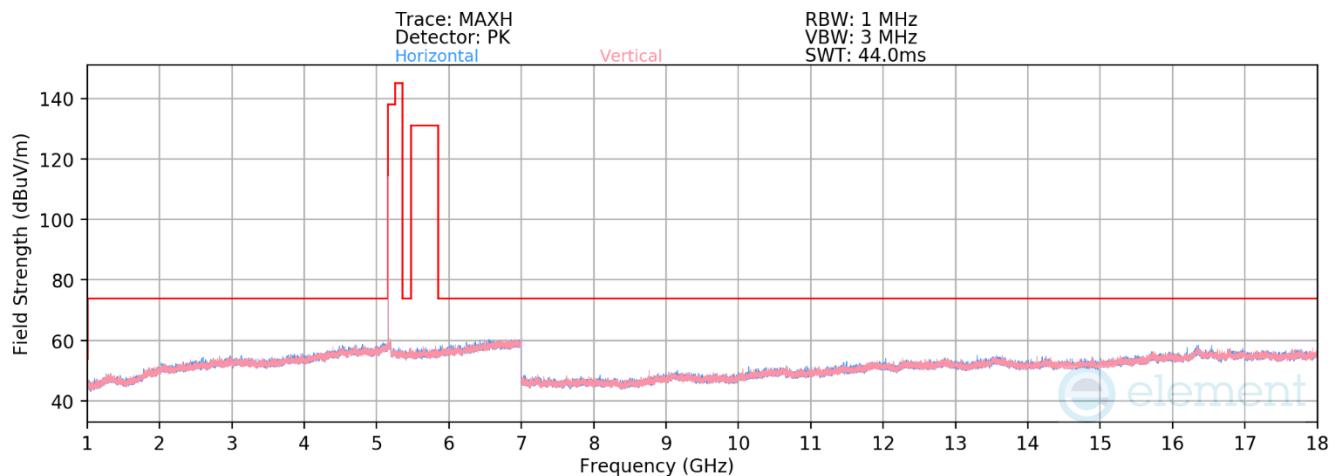


Plot 7-67. RSE 1-18GHz Antenna 4a (BDR GFSK ePA – 5162MHz)

Mode: BDR
 Data Rate: 1Mbps
 Power Scheme: ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 5162MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
10324.00	Peak	H	-	-	-71.38	14.80	50.42	68.20	-17.78
* 15486.00	Average	H	-	-	-84.04	20.16	43.12	53.98	-10.86
* 15486.00	Peak	H	-	-	-71.60	20.16	55.56	73.98	-18.42

Table 7-22. Radiated Measurements Antenna 4a

FCC ID: BCGA2764	 element	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device			

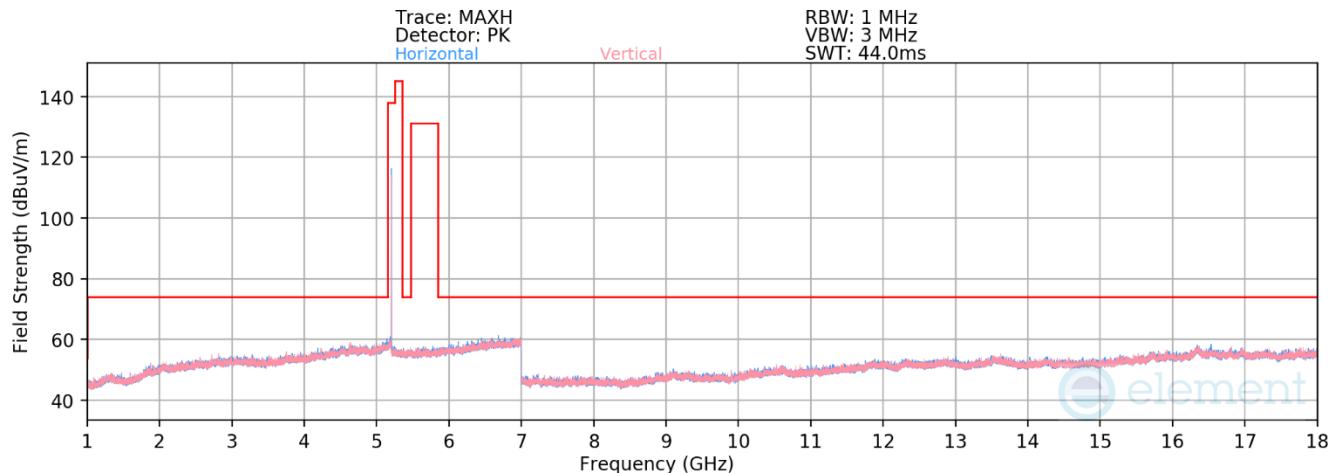

Plot 7-68. RSE 1-18GHz Antenna 4a (BDR GFSK ePA – 5204MHz)

Mode: BDR
 Data Rate: 1Mbps
 Power Scheme: ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 5204MHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
10408.00	Peak	H	-	-	-71.90	15.46	50.56	68.20	-17.64
*	Average	H	-	-	-84.50	20.13	42.63	53.98	-11.34
*	Peak	H	-	-	-72.62	20.13	54.51	73.98	-19.46

Table 7-23. Radiated Measurements Antenna 4a

FCC ID: BCGA2764	 element	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device			

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

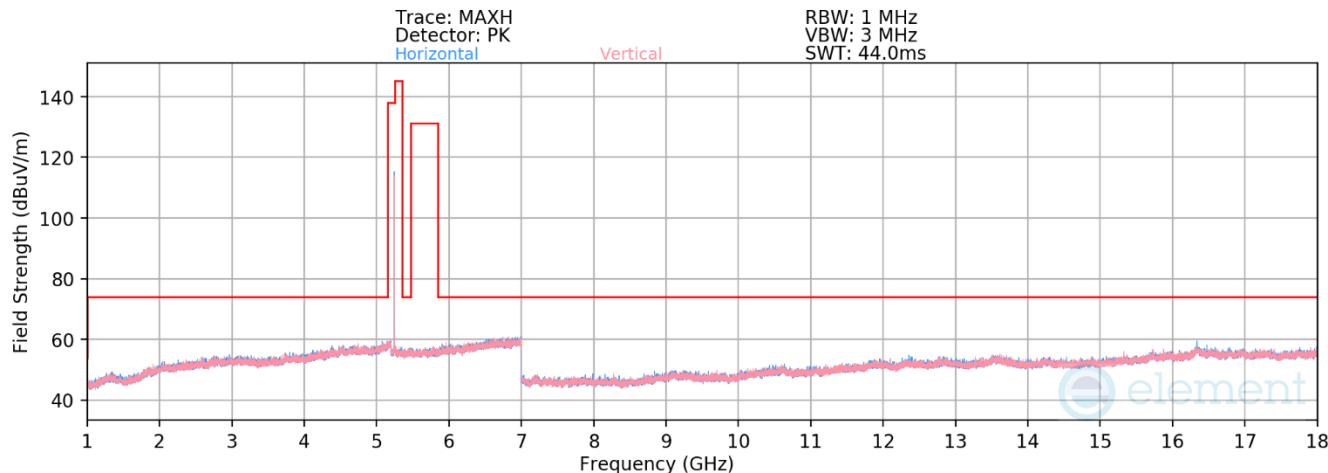


Plot 7-69. RSE 1-18GHz Antenna 4a (BDR GFSK ePA – 5245MHz)

Mode: BDR
 Data Rate: 1Mbps
 Power Scheme: ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 5245MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
10490.00	Peak	H	-	-	-71.41	14.98	50.57	68.20	-17.63
*	Average	H	-	-	-84.56	21.37	43.81	53.98	-10.17
*	Peak	H	-	-	-72.48	21.37	55.89	73.98	-18.09

Table 7-24. Radiated Measurements Antenna 4a

FCC ID: BCGA2764	 element MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device	Page 71 of 100	

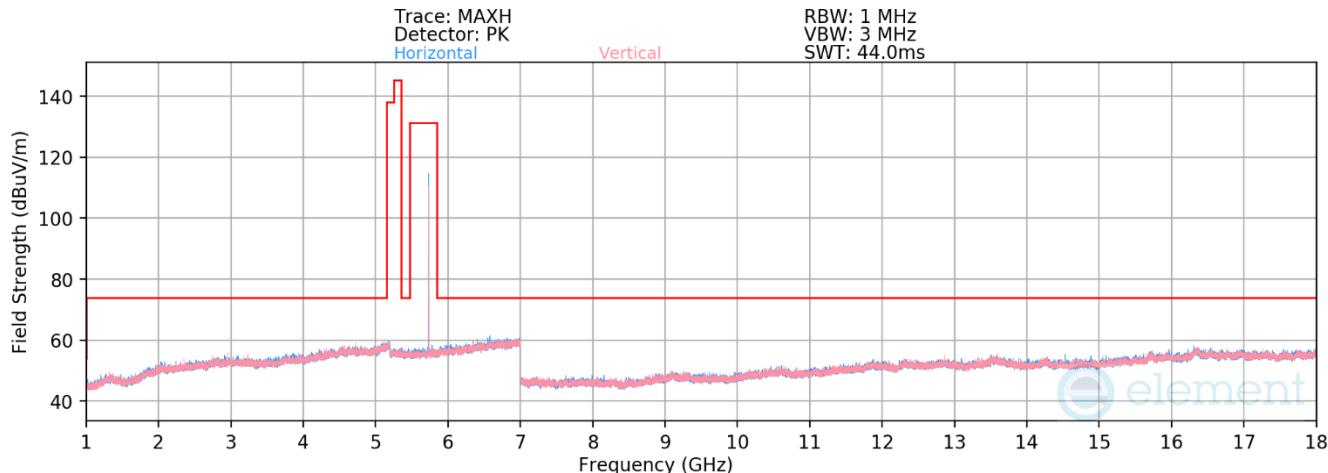


Plot 7-70. RSE 1-18GHz Antenna 4a (BDR GFSK ePA – 5733MHz)

Mode: BDR
 Data Rate: 1Mbps
 Power Scheme: ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 5733MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
* 11466.00	Average	H	-	-	-83.34	16.40	40.06	53.98	-13.92
* 11466.00	Peak	H	-	-	-71.72	16.40	51.68	73.98	-22.30
17199.00	Peak	H	-	-	-72.85	21.10	55.25	68.20	-12.95

Table 7-25. Radiated Measurements Antenna 4a

FCC ID: BCGA2764	 element	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device			

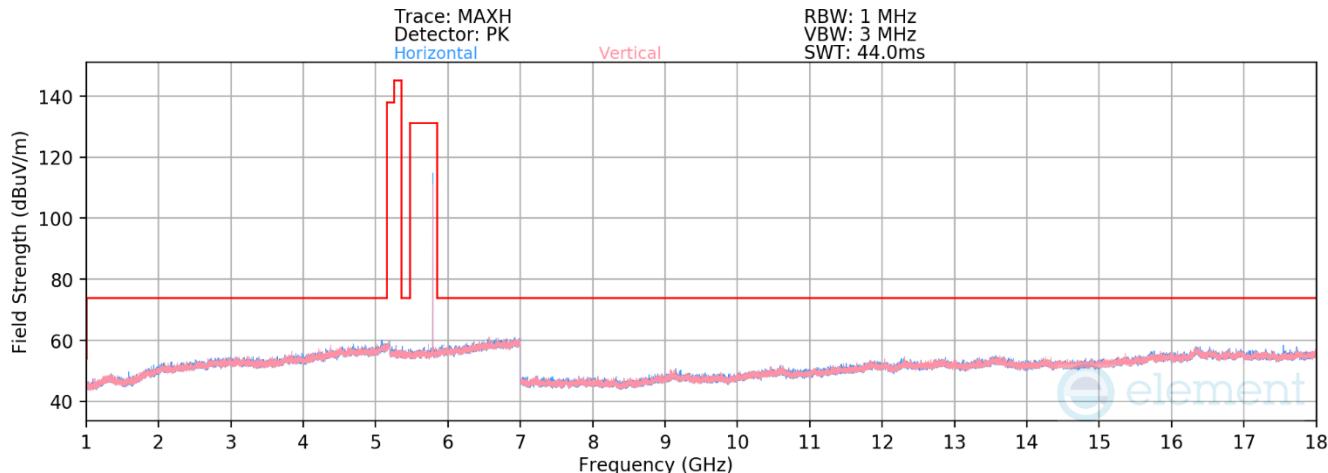


Plot 7-71. RSE 1-18GHz Antenna 4a (BDR GFSK ePA – 5789MHz)

Mode: BDR
 Data Rate: 1Mbps
 Power Scheme: ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 5789MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
* 11578.00	Average	H	-	-	-83.26	16.28	40.02	53.98	-13.96
* 11578.00	Peak	H	-	-	-71.22	16.28	52.06	73.98	-21.92
17367.00	Peak	H	-	-	-71.96	21.28	56.32	68.20	-11.88

Table 7-26. Radiated Measurements Antenna 4a

FCC ID: BCGA2764	 element	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device			

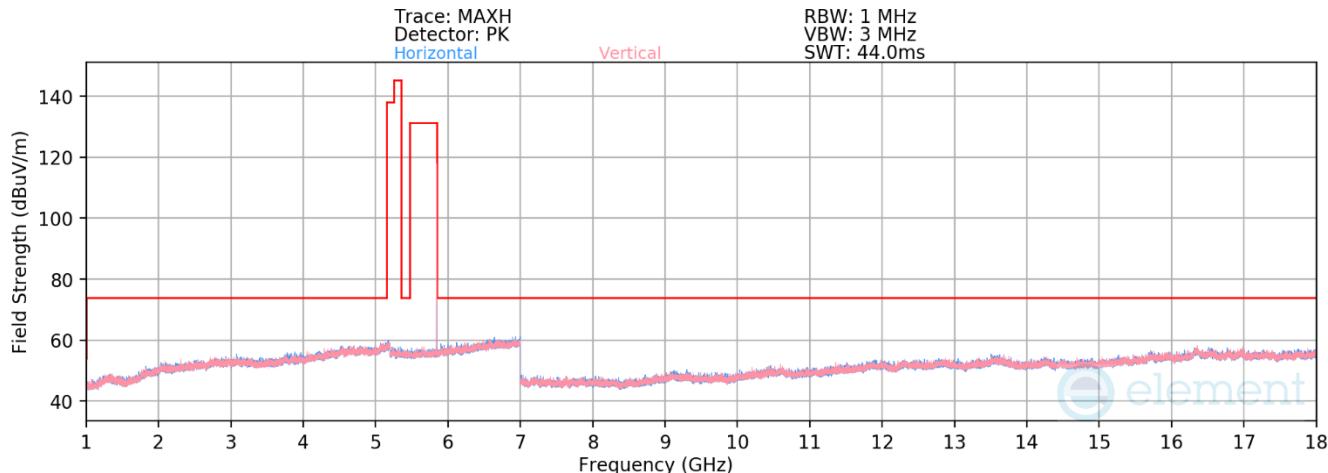

Plot 7-72. RSE 1-18GHz Antenna 4a (BDR GFSK ePA – 5844MHz)

Mode: BDR
 Data Rate: 1Mbps
 Power Scheme: ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 5844MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
* 11688.00	Average	H	-	-	-83.18	16.89	40.71	53.98	-13.26
* 11688.00	Peak	H	-	-	-70.66	16.89	53.23	73.98	-20.74
17532.00	Peak	H	-	-	-72.85	21.68	55.83	68.20	-12.37


Table 7-27. Radiated Measurements Antenna 4a

FCC ID: BCGA2764	 element	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device			

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.6.3 TxBF Radiated Spurious Emission

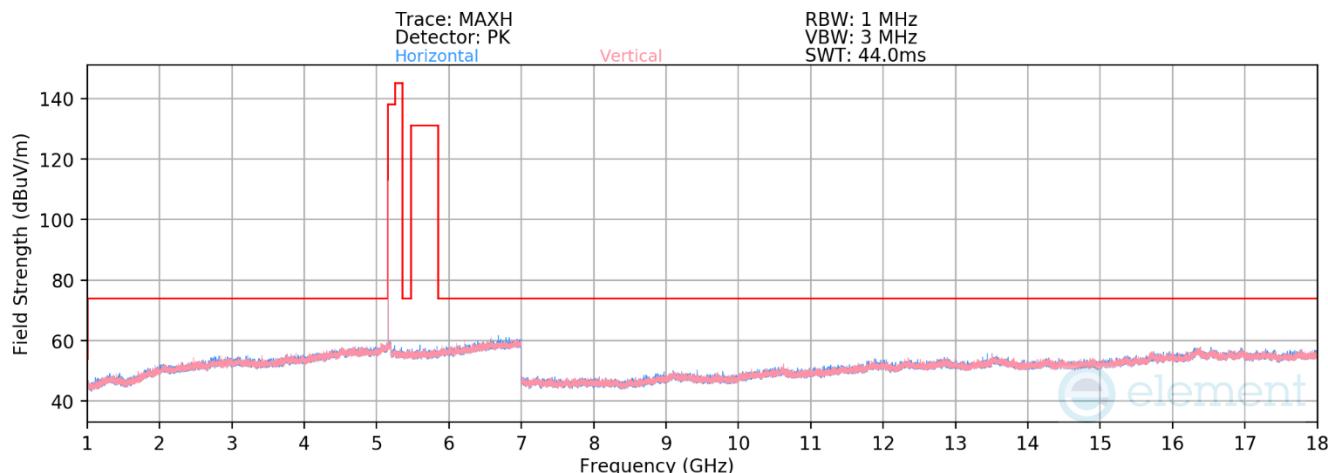


Plot 7-73. RSE 1-18GHz TxBF (BDR GFSK ePA – 5162MHz)

Mode: BDR
 Data Rate: 1Mbps
 Power Scheme: ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 5162MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
10324.00	Peak	H	-	-	-71.55	14.80	50.25	68.20	-17.95
* 15486.00	Average	H	-	-	-84.22	20.16	42.94	53.98	-11.04
* 15486.00	Peak	H	-	-	-72.70	20.16	54.46	73.98	-19.52

Table 7-28. Radiated Measurements TxBF

FCC ID: BCGA2764	 element	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device			

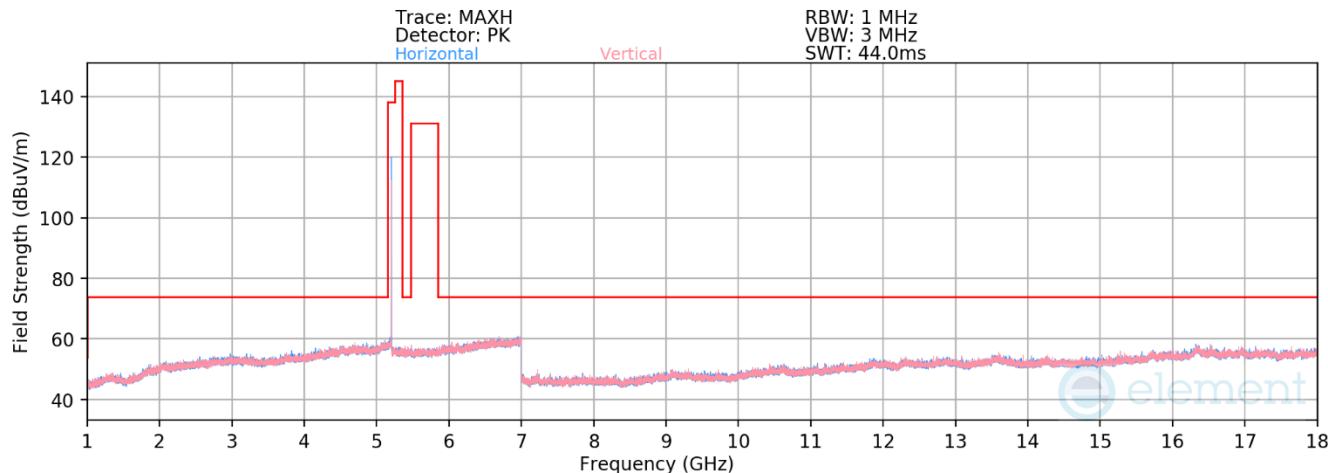

Plot 7-74. RSE 1-18GHz TxBF (BDR GFSK ePA – 5204MHz)

Mode: BDR
 Data Rate: 1Mbps
 Power Scheme: ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 5204MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
10408.00	Peak	H	-	-	-72.24	15.46	50.22	68.20	-17.98
* 15612.00	Average	H	-	-	-84.22	20.13	42.91	53.98	-11.06
* 15612.00	Peak	H	-	-	-72.78	20.13	54.35	73.98	-19.62

Table 7-29. Radiated Measurements TxBF

FCC ID: BCGA2764	 element MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device	Page 76 of 100	

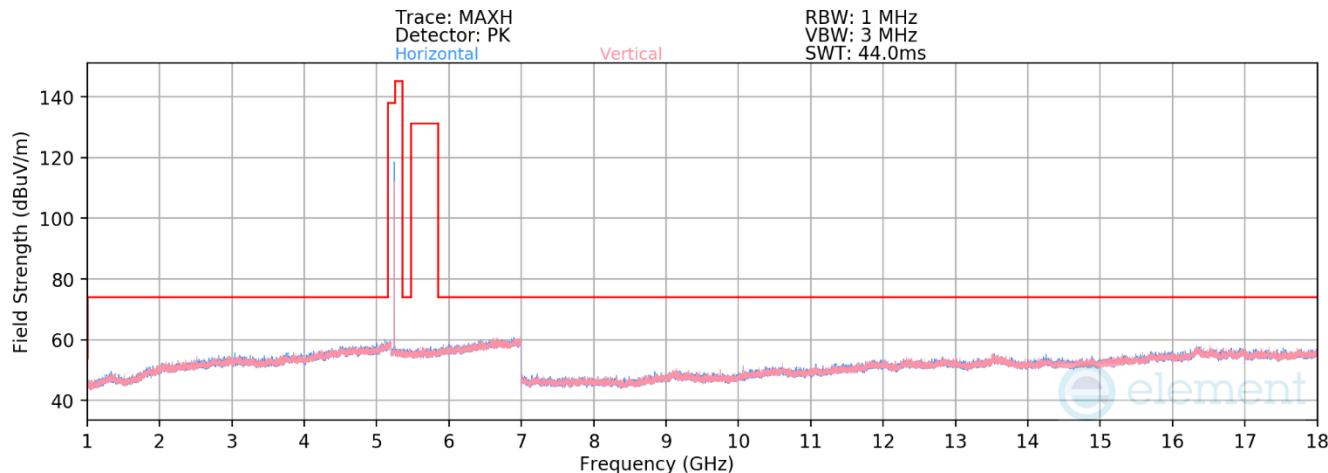

Plot 7-75. RSE 1-18GHz TxBF (BDR GFSK ePA – 5245MHz)

Mode: BDR
 Data Rate: 1Mbps
 Power Scheme: ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 5245MHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
10490.00	Peak	H	-	-	-71.66	14.98	50.32	68.20	-17.88
* 15735.00	Average	H	-	-	-84.57	21.37	43.80	53.98	-10.18
* 15735.00	Peak	H	-	-	-73.23	21.37	55.14	73.98	-18.84

Table 7-30. Radiated Measurements TxBF

FCC ID: BCGA2764	 element	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device			

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

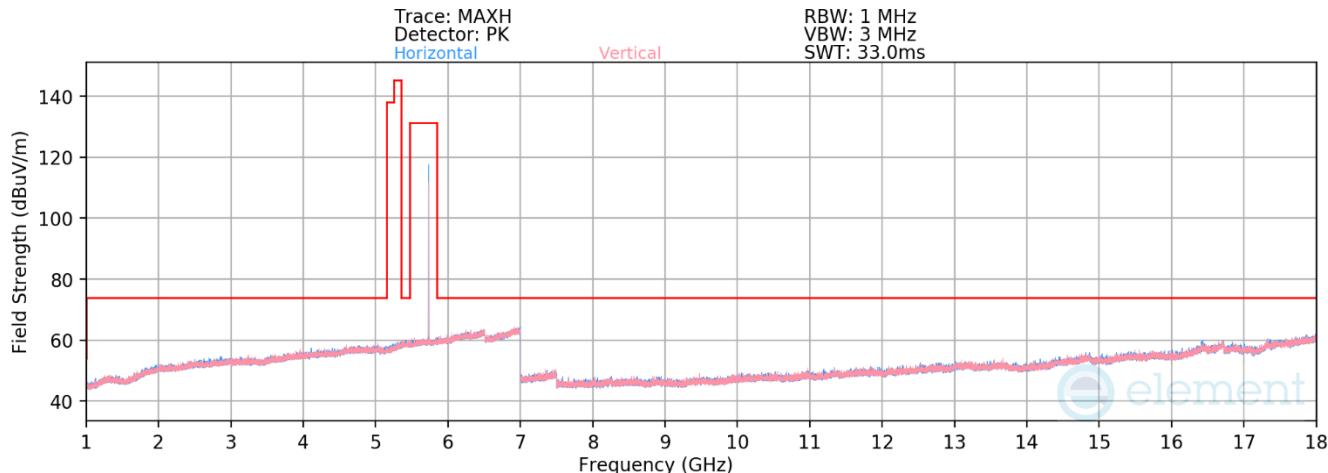

Plot 7-76. RSE 1-18GHz TxBF (BDR GFSK ePA – 5733MHz)

Mode: BDR
 Data Rate: 1Mbps
 Power Scheme: ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 5733MHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
* 11466.00	Average	H	-	-	-84.01	13.30	36.29	53.98	-17.69
* 11466.00	Peak	H	-	-	-72.39	13.30	47.91	73.98	-26.07
17199.00	Peak	H	-	-	-73.62	22.01	55.39	68.20	-12.81

Table 7-31. Radiated Measurements TxBF

FCC ID: BCGA2764	 element	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device			

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

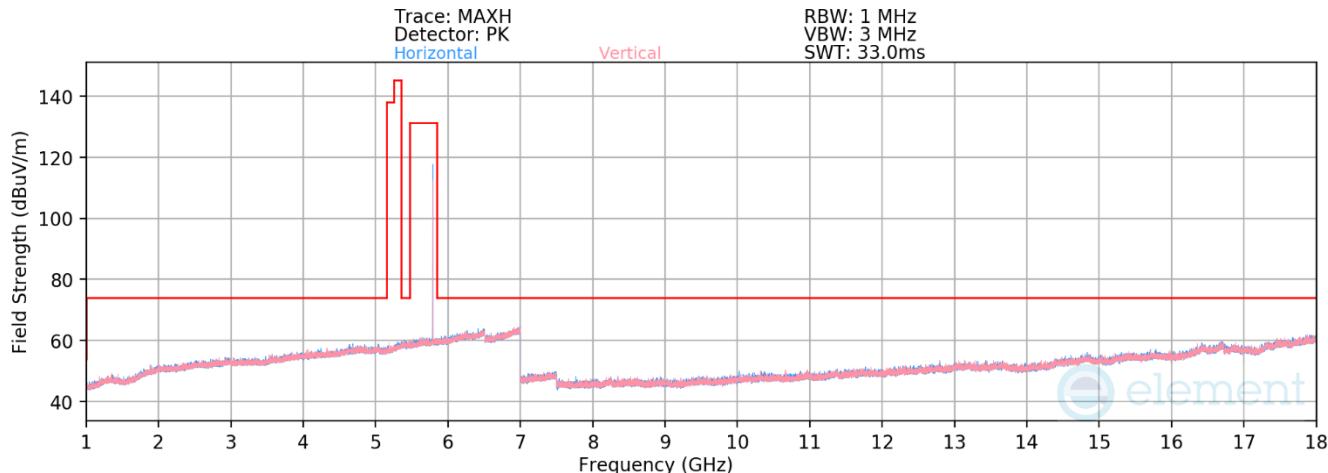


Plot 7-77. RSE 1-18GHz TxBF (BDR GFSK ePA – 5789MHz)

Mode: BDR
 Data Rate: 1Mbps
 Power Scheme: ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 5789MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
* 11578.00	Average	H	-	-	-84.11	13.45	36.34	53.98	-17.64
* 11578.00	Peak	H	-	-	-72.30	13.45	48.15	73.98	-25.83
17367.00	Peak	H	-	-	-73.18	22.80	56.62	68.20	-11.58

Table 7-32. Radiated Measurements TxBF

FCC ID: BCGA2764	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device	Page 79 of 100

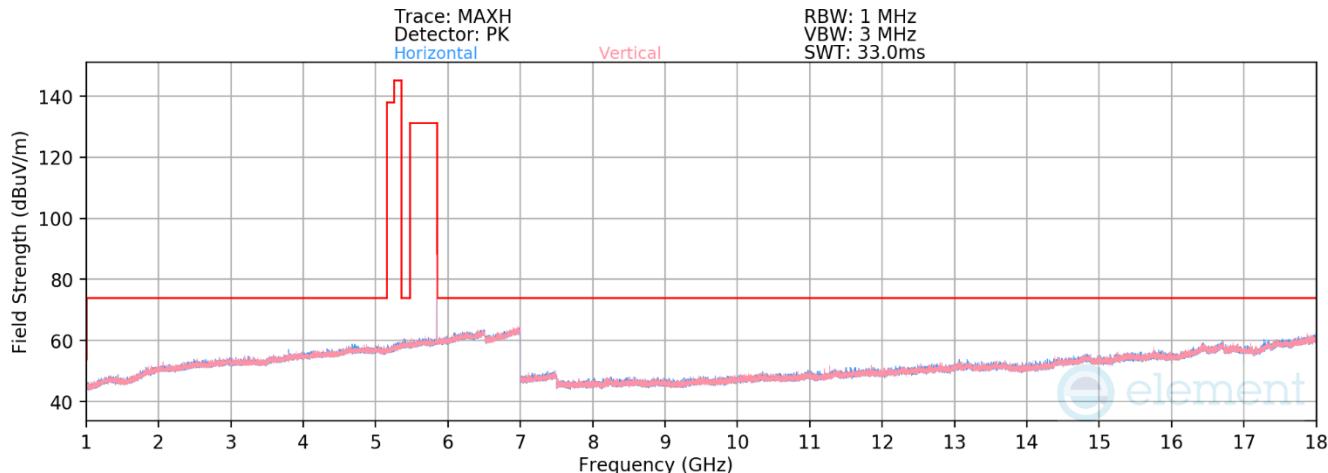

Plot 7-78. RSE 1-18GHz TxBF (BDR GFSK ePA – 5844MHz)


Mode: BDR
 Data Rate: 1Mbps
 Power Scheme: ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 5844MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11688.00	Average	H	-	-	-84.12	13.74	36.62	53.98	-17.36
* 11688.00	Peak	H	-	-	-72.50	13.74	48.24	73.98	-25.74
17532.00	Peak	H	-	-	-73.83	23.75	56.92	68.20	-11.28


Table 7-33. Radiated Measurements TxBF

FCC ID: BCGA2764	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device	Page 80 of 100

Radiated Spurious Emission (Above 18GHz)

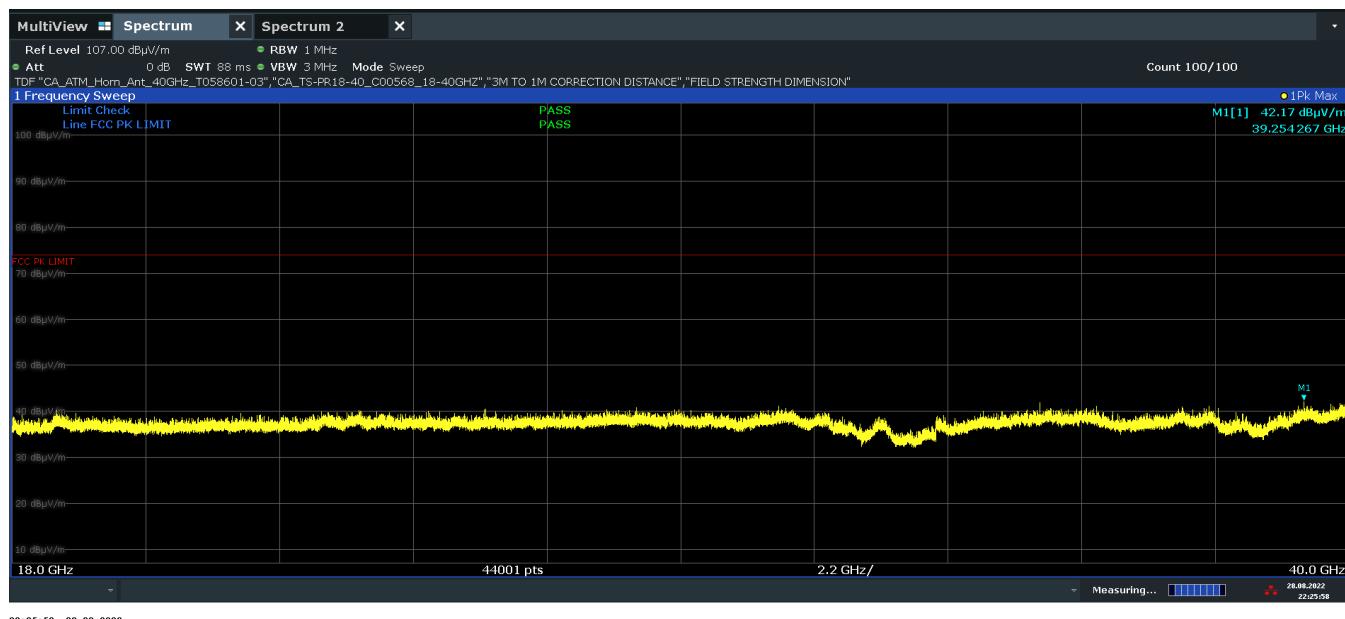


Plot 7-79. RSE 18 - 40GHz TxBF (BDR GFSK ePA – 5245MHz, Pol. H)

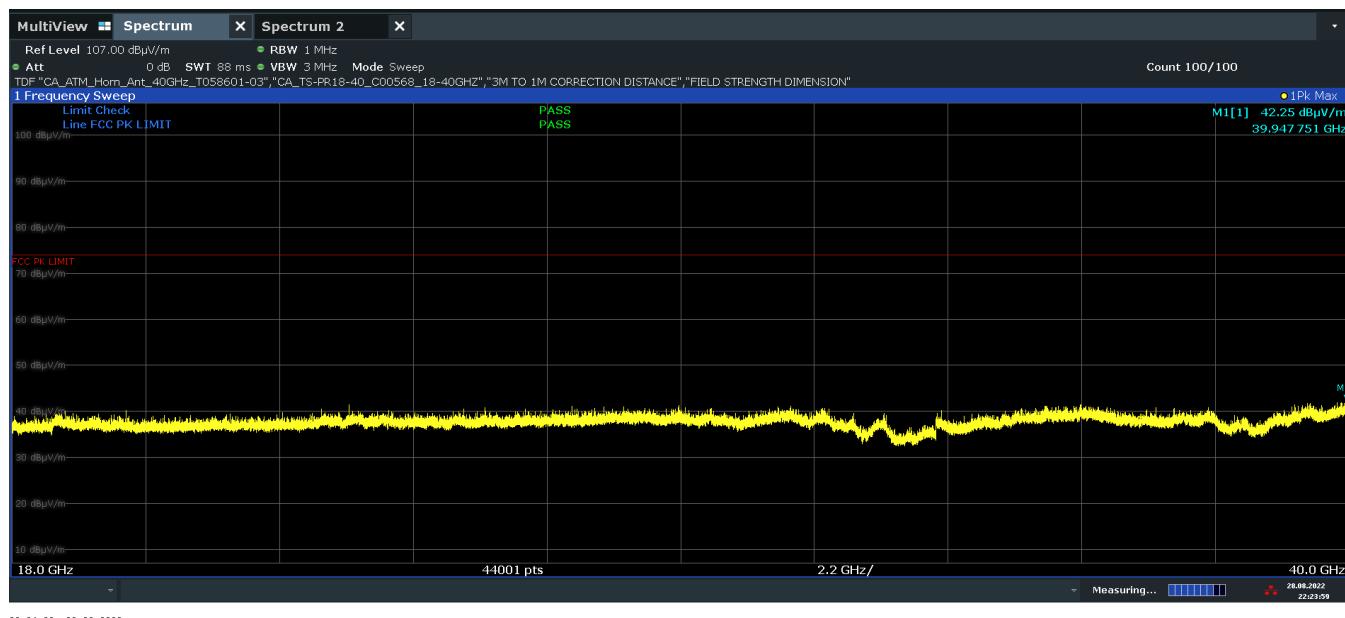


Plot 7-80. RSE 18 - 40GHz TxBF (BDR GFSK ePA – 5245MHz, Pol. V)

FCC ID: BCGA2764	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device	Page 81 of 100

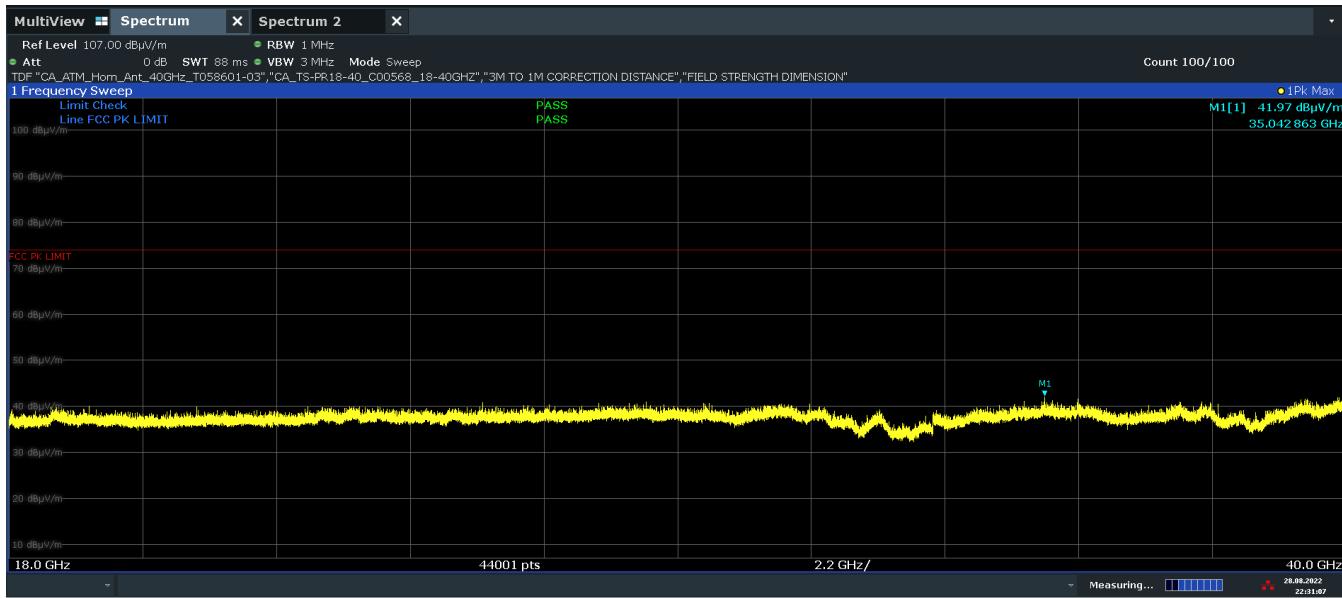

Plot 7-81. RSE 18 - 40GHz TxBF (BDR GFSK ePA – 5844MHz, Pol. H)

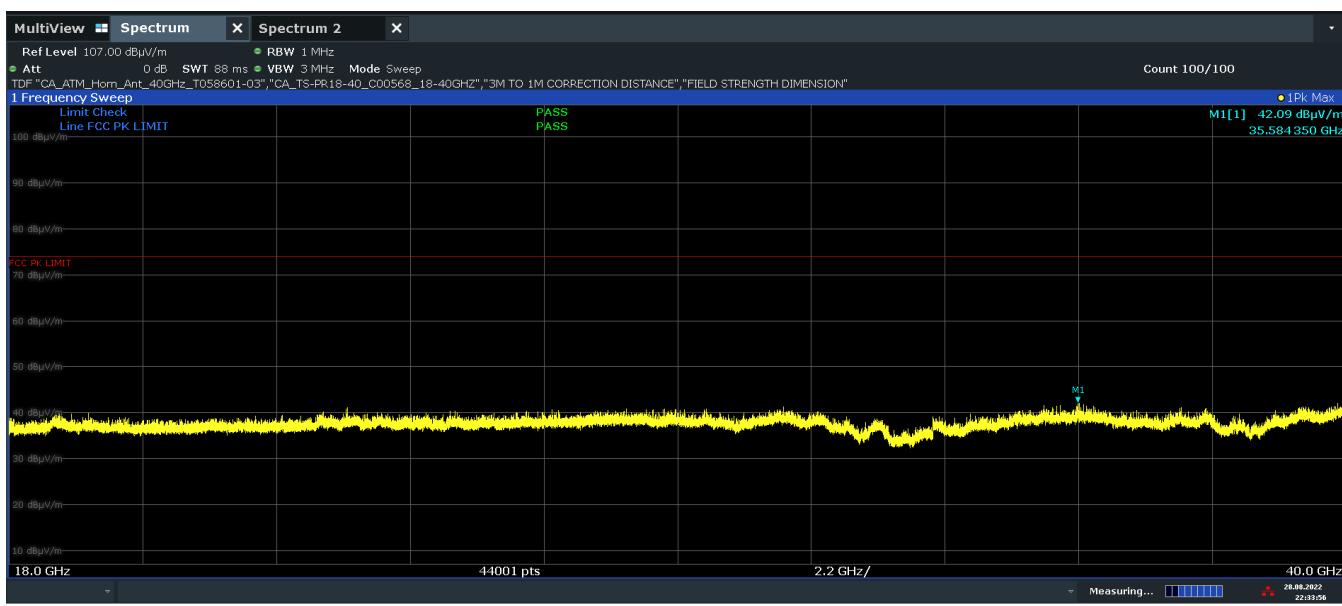

Plot 7-82. RSE 18 - 40GHz TxBF (BDR GFSK ePA – 5844MHz, Pol. V)

FCC ID: BCGA2764	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device	Page 82 of 100

7.6.4 Radiated Band Edge Measurements


§15.407(b.1)(b.2) §15.205 §15.209

Antenna 5b

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$


Mode: BDR
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 5162MHz

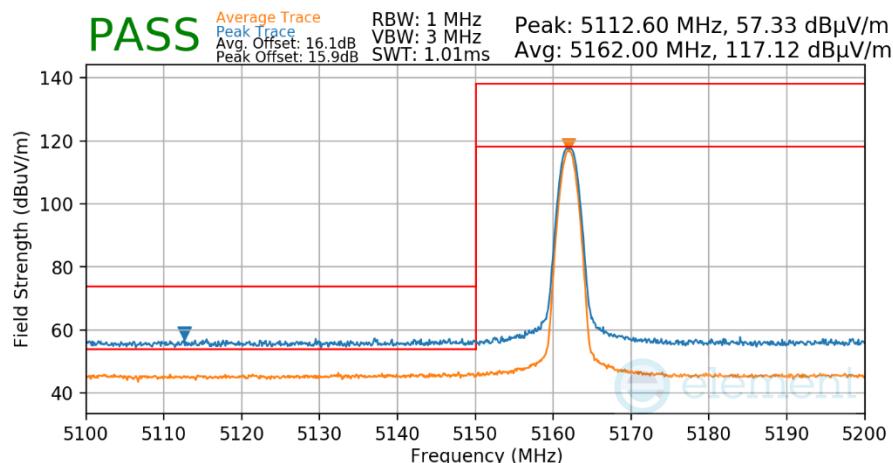

Plot 7-83. Radiated Lower Band Edge Measurement Antenna 5b


FCC ID: BCGA2764	 element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device		Page 83 of 100

Mode: BDR
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 5733MHz

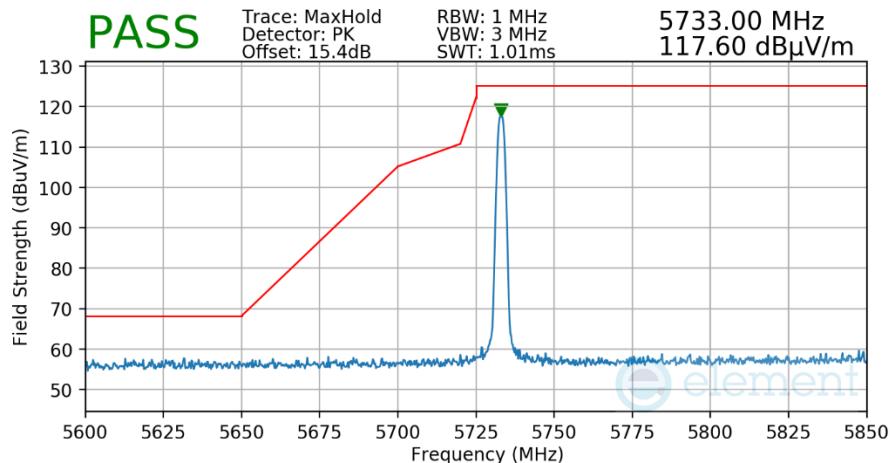

Plot 7-84. Radiated Lower Band Edge Measurement Antenna 5b

Mode: BDR
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 5844MHz

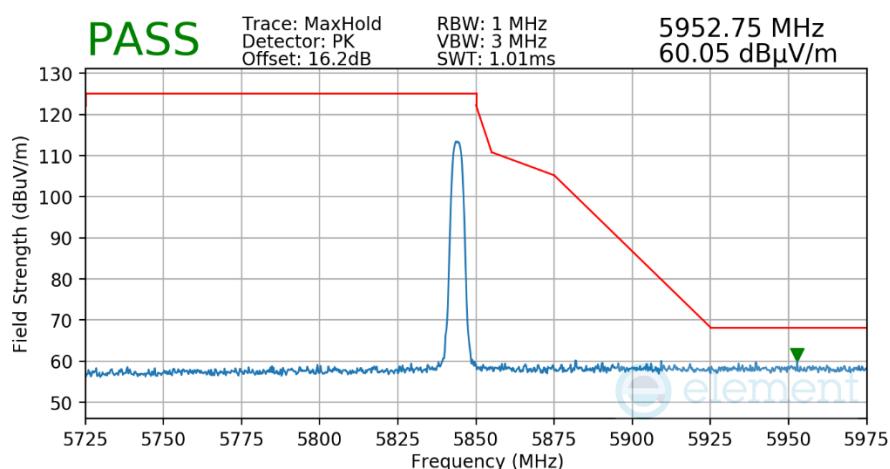

Plot 7-85. Radiated Upper Band Edge Measurement Antenna 5b

FCC ID: BCGA2764	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device		Page 84 of 100

Radiated Band Edge Measurements


§15.407(b.1)(b.2) §15.205 §15.209

Antenna 4a

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$


Mode: BDR
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 5162MHz

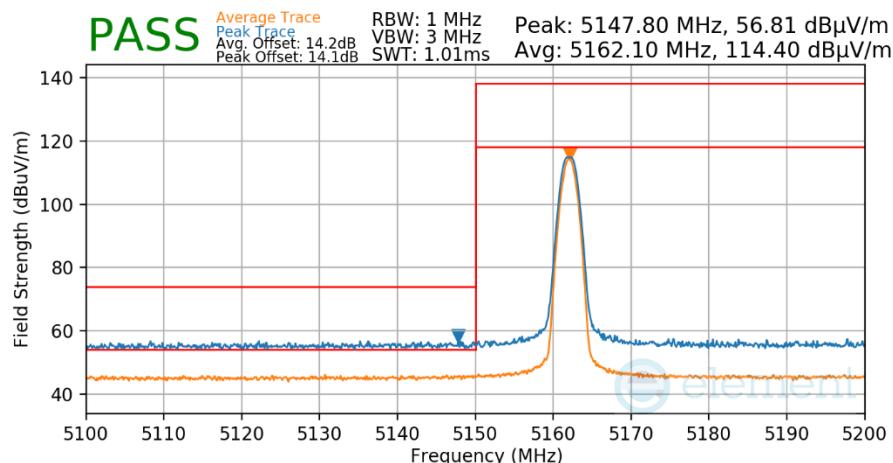

Plot 7-86. Radiated Lower Band Edge Measurement Antenna 4a


FCC ID: BCGA2764	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device	Page 85 of 100

Mode: BDR
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 5733MHz

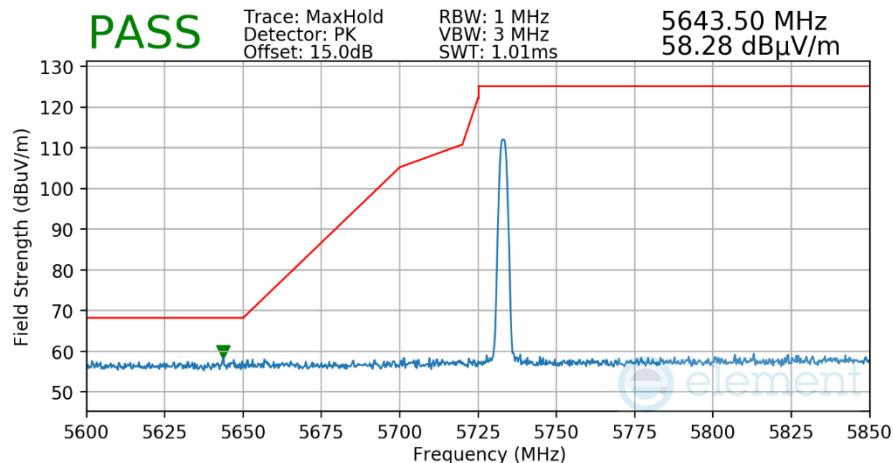

Plot 7-87. Radiated Lower Band Edge Measurement Antenna 4a

Mode: BDR
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 5844MHz

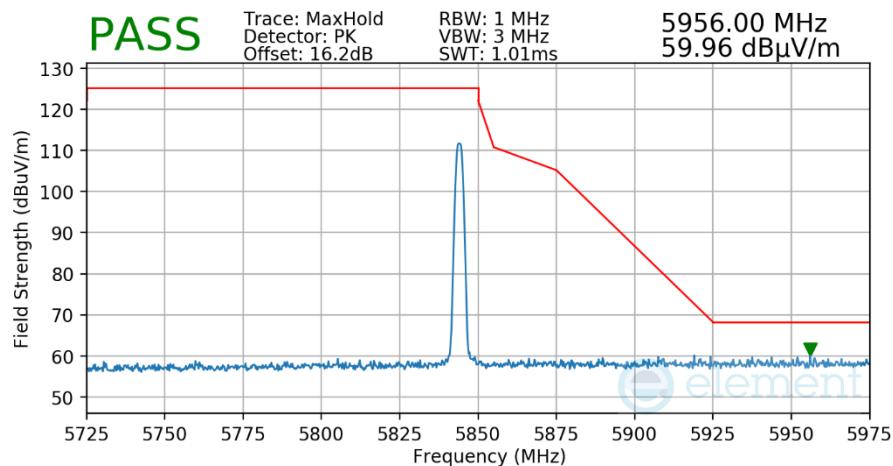

Plot 7-88. Radiated Upper Band Edge Measurement Antenna 4a

FCC ID: BCGA2764		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device		Page 86 of 100

Radiated Band Edge Measurements


§15.407(b.1)(b.2) §15.205 §15.209

TxBF

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$


Mode: BDR
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 5162MHz

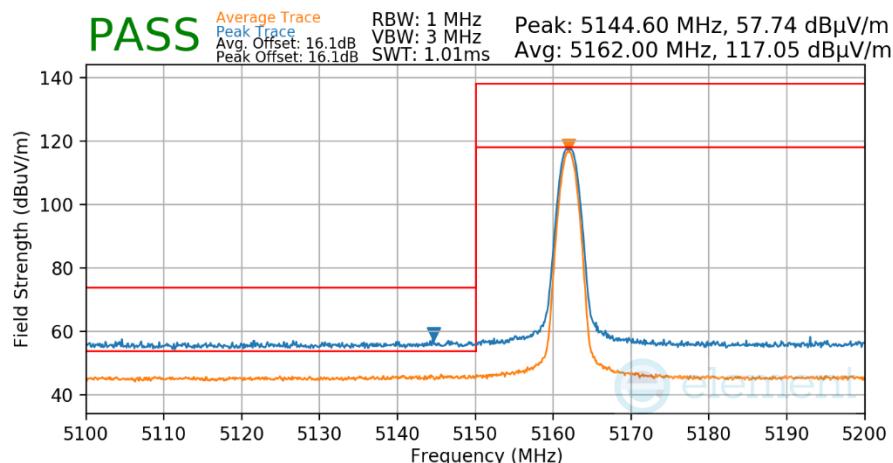

Plot 7-89. Radiated Lower Band Edge Measurement TxBF


FCC ID: BCGA2764	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device	Page 87 of 100

Mode: BDR
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 5733MHz

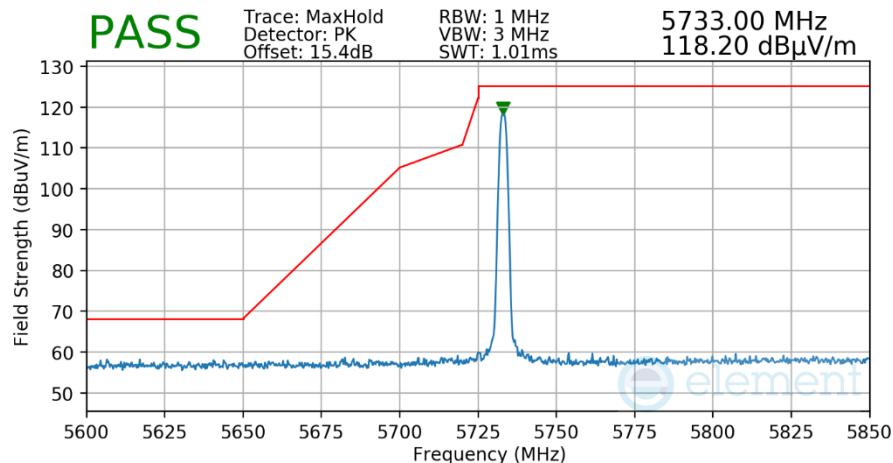

Plot 7-90. Radiated Lower Band Edge Measurement TxBF

Mode: BDR
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 5844MHz

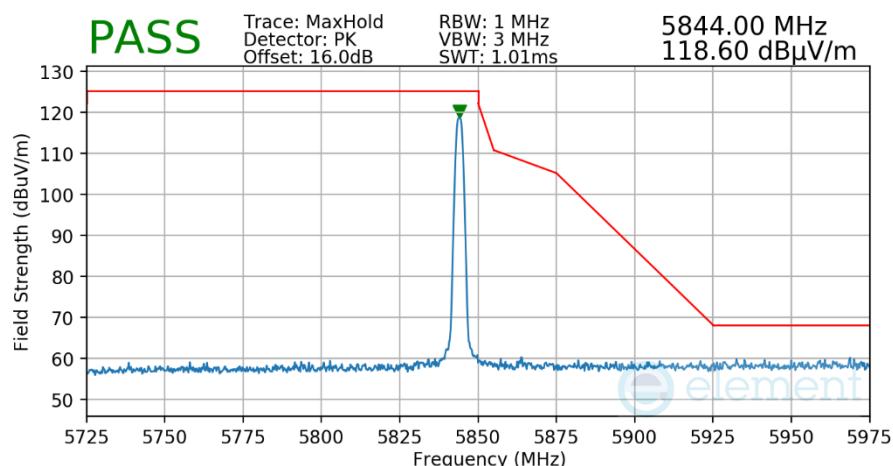

Plot 7-91. Radiated Upper Band Edge Measurement TxBF

FCC ID: BCGA2764	 element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device		Page 88 of 100

7.7 Radiated Spurious Emissions – Below 1GHz

§15.209

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-34 per Section 15.209.

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-34. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA2764	 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device		Page 89 of 100

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

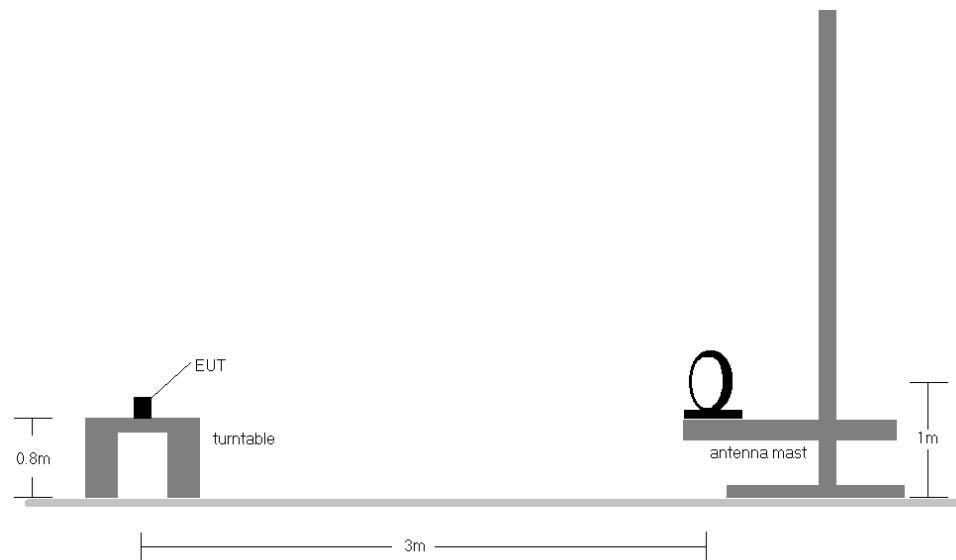


Figure 7-6. Radiated Test Setup < 30MHz

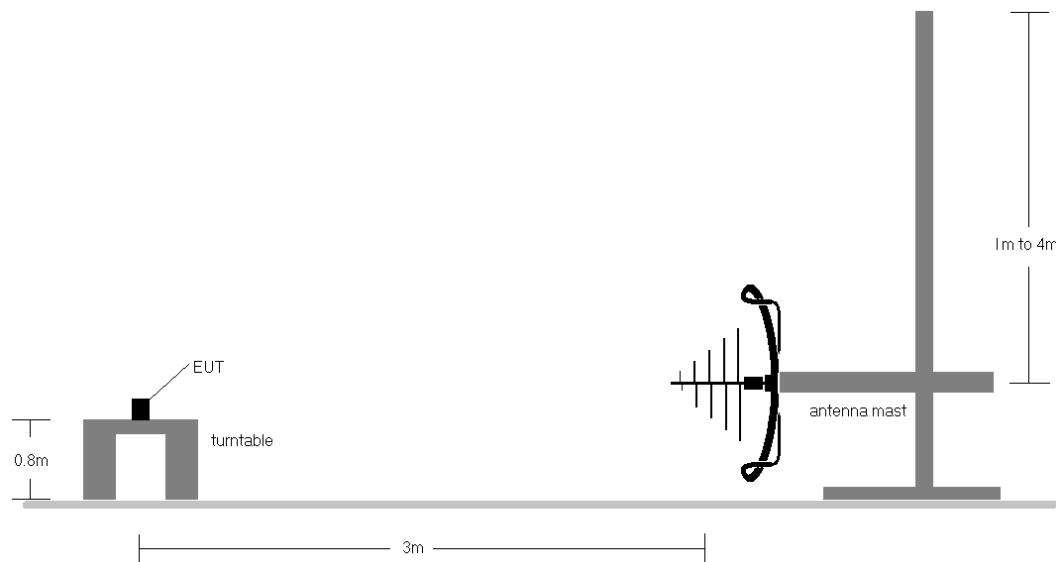


Figure 7-7. Radiated Test Setup < 1GHz

FCC ID: BCGA2764	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device	Page 90 of 100

Test Notes

1. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-34.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.
10. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger

Sample Calculations


Determining Spurious Emissions Levels

- o Field Strength Level $[\text{dB}_{\mu\text{V/m}}]$ = Analyzer Level $[\text{dBm}] + 107 + \text{AFCL} [\text{dB/m}]$
- o $\text{AFCL} [\text{dB/m}] = \text{Antenna Factor} [\text{dB/m}] + \text{Cable Loss} [\text{dB}] - \text{Preamplifier Gain} [\text{dB}]$
- o Margin $[\text{dB}] = \text{Field Strength Level} [\text{dB}_{\mu\text{V/m}}] - \text{Limit} [\text{dB}_{\mu\text{V/m}}]$

FCC ID: BCGA2764	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device	Page 91 of 100

TxBF Radiated Spurious Emissions (Below 1GHz)

§15.209

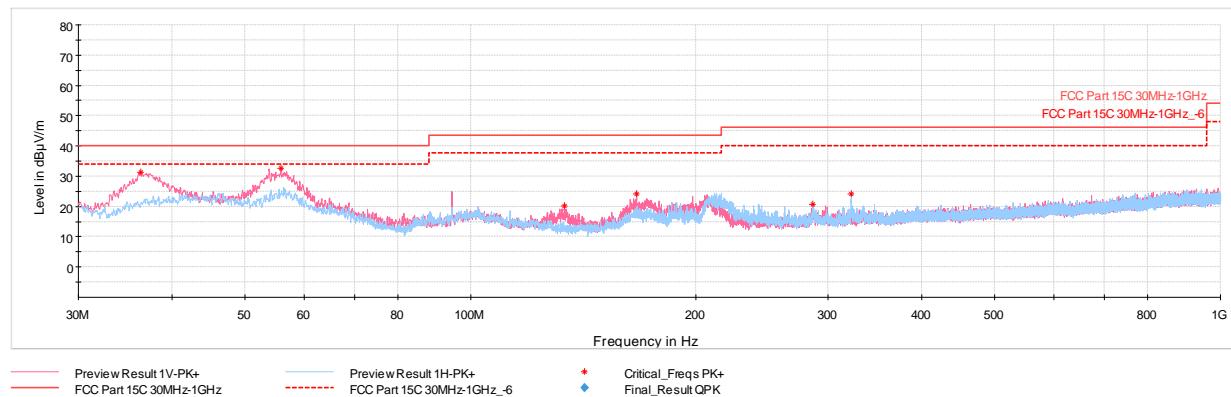

Plot 7-92. RSE 30MHz - 1GHz TxBF (BDR GFSK ePA – 5245MHz), with AC/DC Adapter


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
36.35	Max-Peak	V	100	15	-57.30	-18.37	31.33	40.00	-8.67
55.90	Max-Peak	V	300	183	-58.20	-16.15	32.65	40.00	-7.35
133.45	Max-Peak	V	100	14	-66.02	-20.87	20.11	43.52	-23.41
166.58	Max-Peak	V	100	52	-62.55	-20.21	24.24	43.52	-19.28
286.23	Max-Peak	H	100	6	-70.46	-15.82	20.72	46.02	-25.30
322.16	Max-Peak	H	100	15	-68.32	-14.56	24.12	46.02	-21.90

Table 7-35. RSE 30MHz - 1GHz TxBF (BDR GFSK ePA – 5245MHz), with AC/DC Adapter

FCC ID: BCGA2764	 element	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device			

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

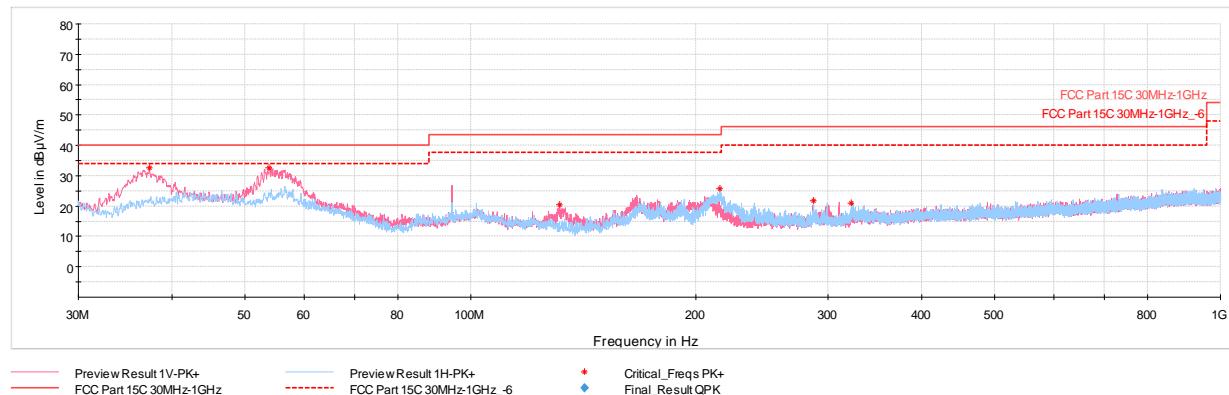

Plot 7-93. RSE 30MHz - 1GHz TxBF (BDR GFSK ePA – 5844MHz), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
37.32	Max-Peak	V	100	19	-56.23	-18.15	32.62	40.00	-7.38
53.86	Max-Peak	V	100	6	-58.64	-15.64	32.72	40.00	-7.28
131.56	Max-Peak	V	100	6	-65.48	-21.17	20.35	43.52	-23.17
215.12	Max-Peak	H	200	159	-63.49	-17.86	25.65	43.52	-17.87
286.90	Max-Peak	H	100	144	-69.34	-15.78	21.88	46.02	-24.14
322.26	Max-Peak	H	100	15	-71.51	-14.55	20.94	46.02	-25.08

Table 7-36. RSE 30MHz - 1GHz TxBF (BDR GFSK ePA – 5844MHz), with AC/DC Adapter

FCC ID: BCGA2764	 element	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device			

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.8 AC Line Conducted Emissions Measurement

§15.207

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. All data rates and modes were investigated for AC Line conducted spurious emissions.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207.

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-37. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Subclause 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA2764	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device	Page 94 of 100

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


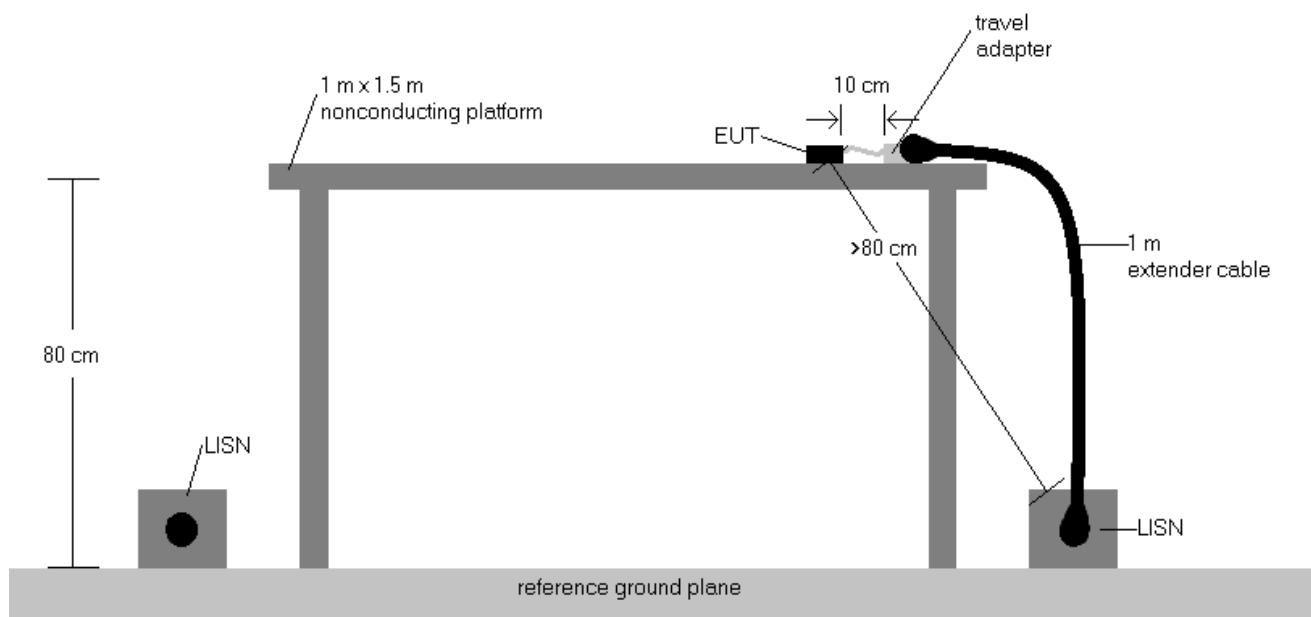


Figure 7-8. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207.
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dB μ V) = QP/AV Analyzer/Receiver Level (dB μ V) + Correction Factor (dB)
6. Margin (dB) = QP/AV Level (dB μ V) - QP/AV Limit (dB μ V)
7. Traces shown in plots are made using quasi-peak and average detectors.
8. Deviations to the Specifications: None.

FCC ID: BCGA2764	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device	Page 95 of 100

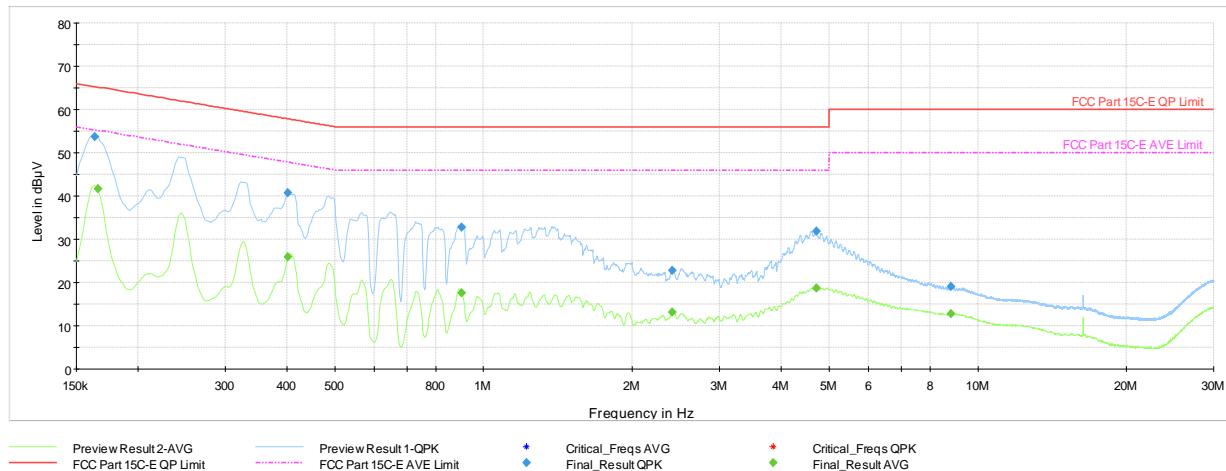


Plot 7-94. AC Line Conducted Plot (BDR GFSK ePA – 5245MHz) (L1) with AC/DC Adapter.

Frequency [MHz]	Process State	QuasiPeak [dB μ V]	Average [dB μ V]	Limit [dB μ V]	Margin [dB]	Line	PE
0.164	FINAL	53.7	—	65.28	-11.54	L1	GND
0.166	FINAL	—	41.72	55.17	-13.46	L1	GND
0.402	FINAL	—	25.83	47.81	-21.98	L1	GND
0.402	FINAL	40.8	—	57.81	-17.06	L1	GND
0.902	FINAL	—	17.61	46.00	-28.39	L1	GND
0.904	FINAL	32.8	—	56.00	-23.21	L1	GND
2.409	FINAL	22.8	—	56.00	-33.19	L1	GND
2.409	FINAL	—	13.14	46.00	-32.86	L1	GND
4.720	FINAL	—	18.78	46.00	-27.22	L1	GND
4.722	FINAL	31.9	—	56.00	-24.14	L1	GND
8.813	FINAL	19.1	—	60.00	-40.94	L1	GND
8.824	FINAL	—	12.70	50.00	-37.30	L1	GND

Table 7-38. AC Line Conducted (BDR GFSK ePA – 5245MHz) (L1) with AC/DC Adapter

FCC ID: BCGA2764	 element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device		Page 96 of 100

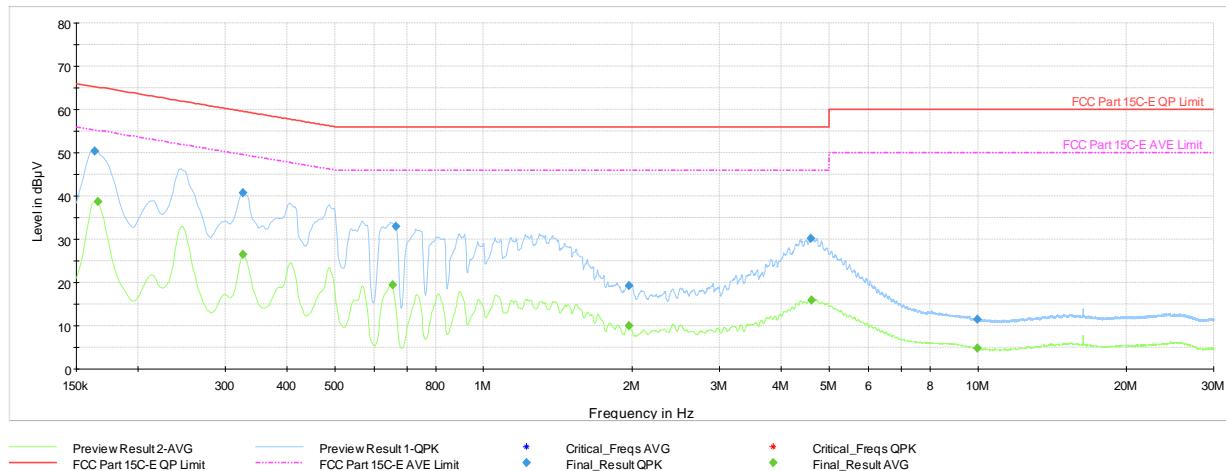


Plot 7-95. AC Line Conducted Plot (BDR GFSK ePA – 5245MHz) (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dB μ V]	Average [dB μ V]	Limit [dB μ V]	Margin [dB]	Line	PE
0.164	FINAL	50.4	—	65.28	-14.85	N	GND
0.166	FINAL	—	38.66	55.17	-16.51	N	GND
0.326	FINAL	—	26.55	49.57	-23.01	N	GND
0.326	FINAL	40.8	—	59.57	-18.81	N	GND
0.654	FINAL	—	19.40	46.00	-26.60	N	GND
0.665	FINAL	32.9	—	56.00	-23.06	N	GND
1.966	FINAL	19.3	—	56.00	-36.69	N	GND
1.966	FINAL	—	10.04	46.00	-35.96	N	GND
4.601	FINAL	30.2	—	56.00	-25.77	N	GND
4.612	FINAL	—	15.95	46.00	-30.05	N	GND
9.969	FINAL	11.4	—	60.00	-48.58	N	GND
9.976	FINAL	—	4.82	50.00	-45.18	N	GND

Table 7-39. AC Line Conducted (BDR GFSK ePA – 5245MHz) (N) with AC/DC Adapter

FCC ID: BCGA2764	 element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device		Page 97 of 100

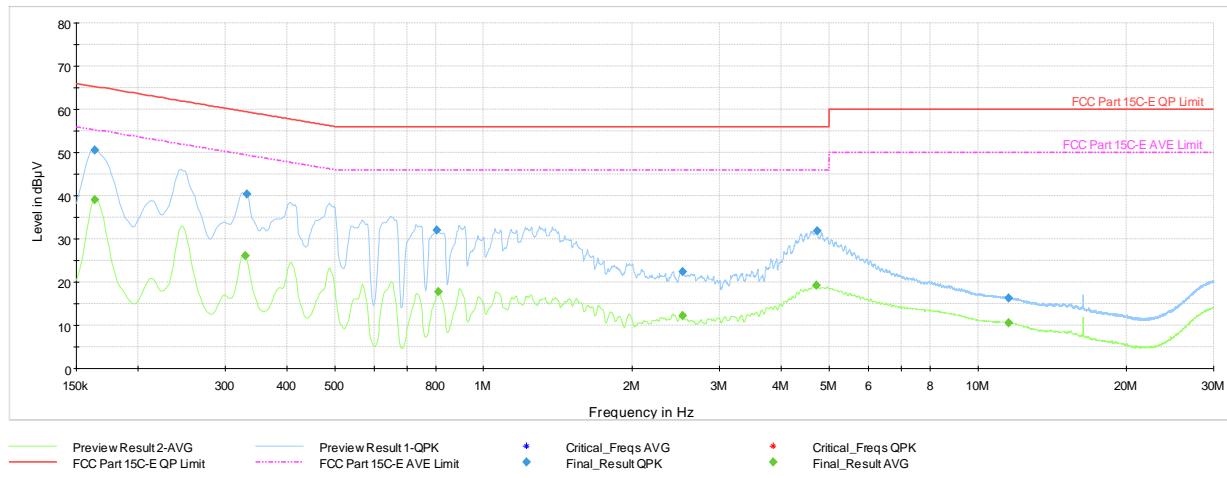


Plot 7-96. AC Line Conducted Plot (BDR GFSK ePA – 5844MHz) (L1) with AC/DC Adapter.

Frequency [MHz]	Process State	QuasiPeak [dB μ V]	Average [dB μ V]	Limit [dB μ V]	Margin [dB]	Line	PE
0.164	FINAL	—	39.07	55.28	-16.21	L1	GND
0.164	FINAL	50.6	—	65.28	-14.72	L1	GND
0.330	FINAL	—	26.13	49.45	-23.32	L1	GND
0.332	FINAL	40.4	—	59.40	-19.00	L1	GND
0.805	FINAL	32.0	—	56.00	-23.98	L1	GND
0.809	FINAL	—	17.70	46.00	-28.30	L1	GND
2.524	FINAL	22.4	—	56.00	-33.56	L1	GND
2.526	FINAL	—	12.19	46.00	-33.81	L1	GND
4.715	FINAL	—	19.19	46.00	-26.81	L1	GND
4.727	FINAL	31.9	—	56.00	-24.12	L1	GND
11.546	FINAL	16.4	—	60.00	-43.61	L1	GND
11.555	FINAL	—	10.56	50.00	-39.44	L1	GND

Table 7-40. AC Line Conducted (BDR GFSK ePA – 5844MHz) (L1) with AC/DC Adapter

FCC ID: BCGA2764	 element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device		Page 98 of 100

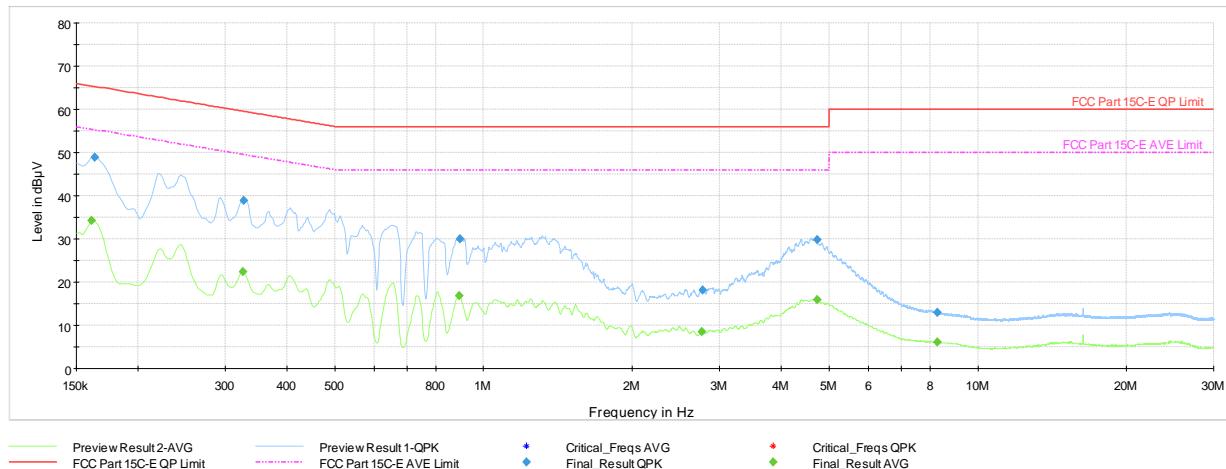

Plot 7-97. AC Line Conducted Plot (BDR GFSK ePA – 5844MHz) (N) with AC/DC Adapter.

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.161	FINAL	—	34.25	55.40	-21.15	N	GND
0.164	FINAL	48.9	—	65.28	-16.37	N	GND
0.326	FINAL	—	22.47	49.57	-27.09	N	GND
0.328	FINAL	38.9	—	59.51	-20.59	N	GND
0.893	FINAL	—	16.77	46.00	-29.23	N	GND
0.897	FINAL	29.9	—	56.00	-26.06	N	GND
2.767	FINAL	—	8.53	46.00	-37.47	N	GND
2.771	FINAL	18.2	—	56.00	-37.76	N	GND
4.731	FINAL	29.9	—	56.00	-26.09	N	GND
4.733	FINAL	—	15.96	46.00	-30.04	N	GND
8.266	FINAL	—	6.10	50.00	-43.90	N	GND
8.273	FINAL	12.9	—	60.00	-47.09	N	GND

Table 7-41. AC Line Conducted (BDR GFSK ePA – 5844MHz) (N) with AC/DC Adapter

FCC ID: BCGA2764	 element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device		Page 99 of 100

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device** **FCC ID: BCGA2764** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules.

FCC ID: BCGA2764	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-16.BCG	Test Dates: 7/21/2022-9/27/2022	EUT Type: Tablet Device	Page 100 of 100