





Plot 7-503. In-Band Emission Plot SDM Antenna 5b (160MHz 802.11ax (UNII Band 5) – Ch. 47, MCS4)




Plot 7-506. In-Band Emission Plot SDM Antenna 4a (20MHz 802.11ax (UNII Band 6) – Ch. 105, MCS4)

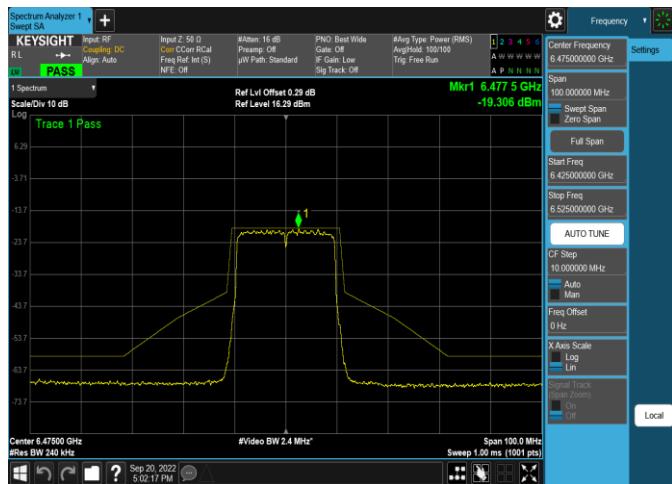


Plot 7-504. In-Band Emission Plot SDM Antenna 4a (160MHz 802.11ax (UNII Band 5) – Ch. 47, MCS4)

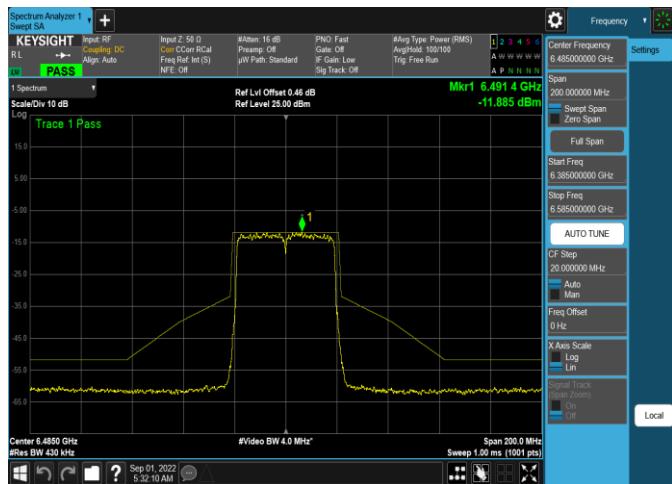

Plot 7-507. In-Band Emission Plot SDM Antenna 5b (40MHz 802.11ax (UNII Band 6) – Ch. 107, MCS4)



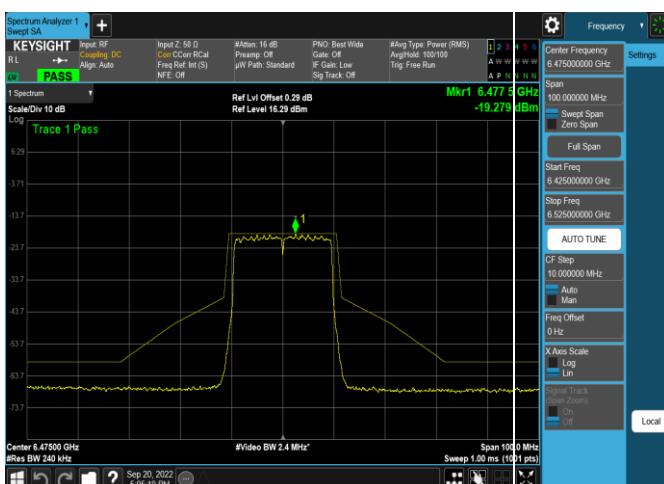


Plot 7-505. In-Band Emission Plot SDM Antenna 5b (20MHz 802.11ax (UNII Band 6) – Ch. 105, MCS4)




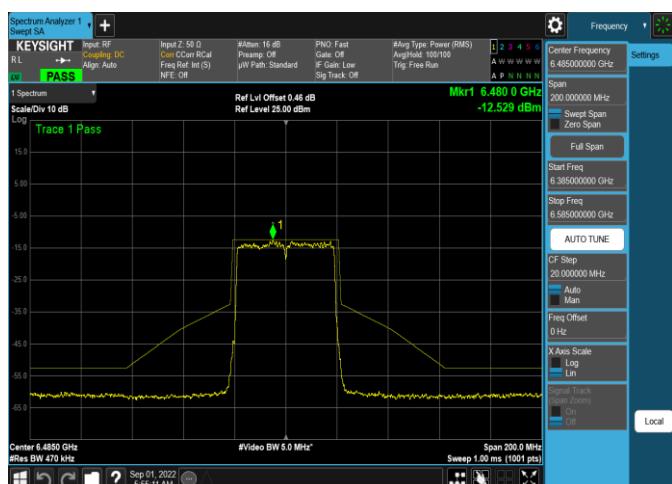


Plot 7-508. In-Band Emission Plot SDM Antenna 4a (40MHz 802.11ax (UNII Band 6) – Ch. 107, MCS4)


FCC ID: BCGA2764 IC: 579C-A2764	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-21-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 148 of 282

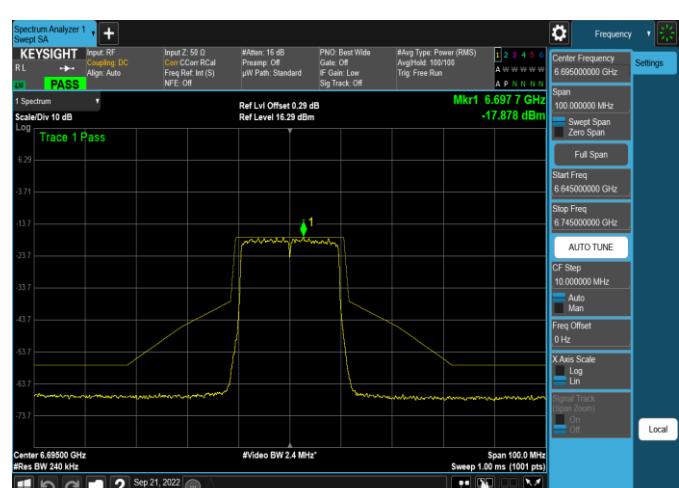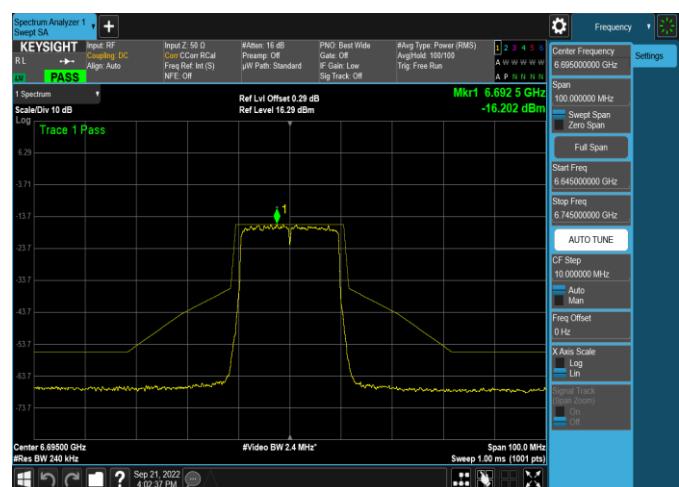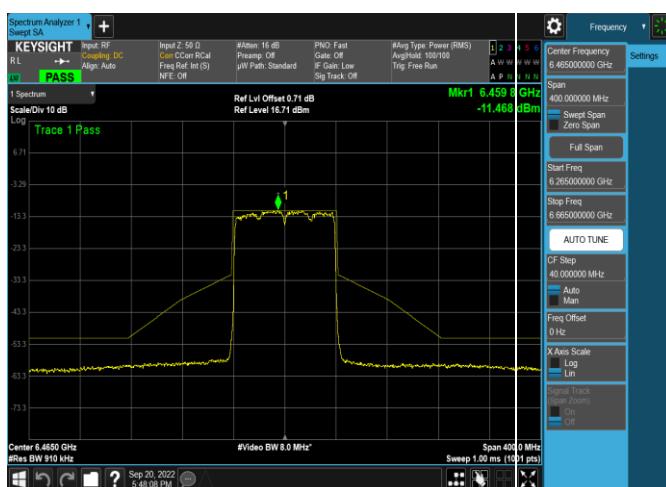


FCC ID: BCGA2764 IC: 579C-A2764	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-21-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 149 of 282

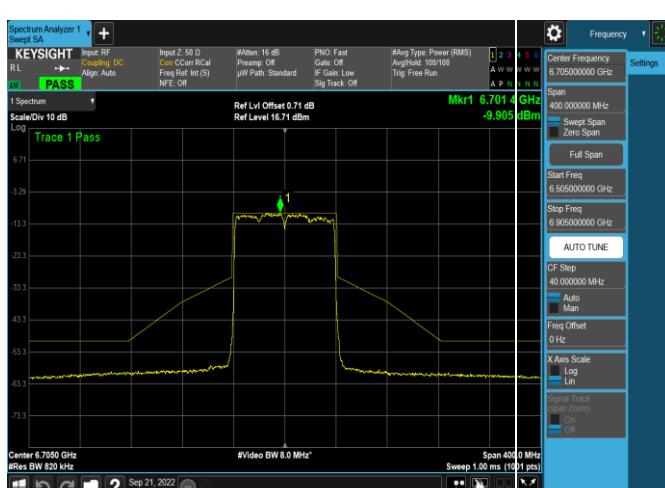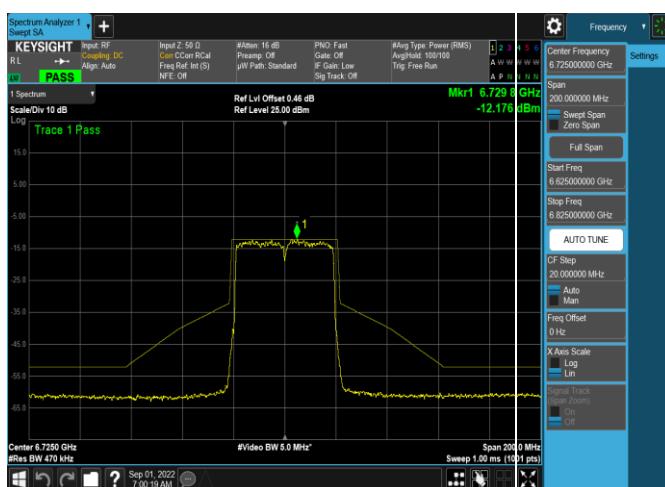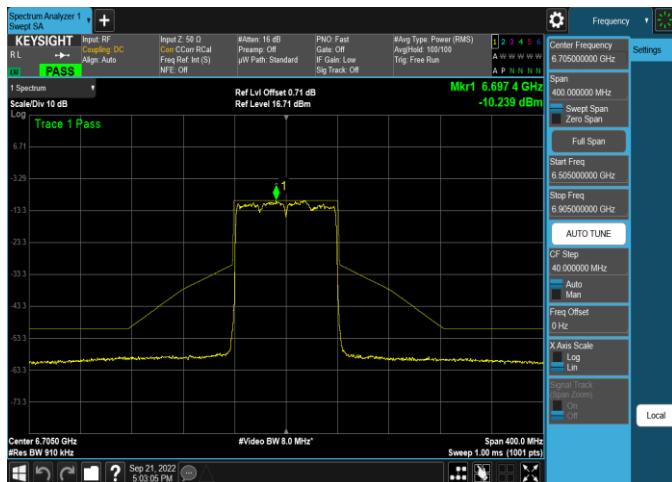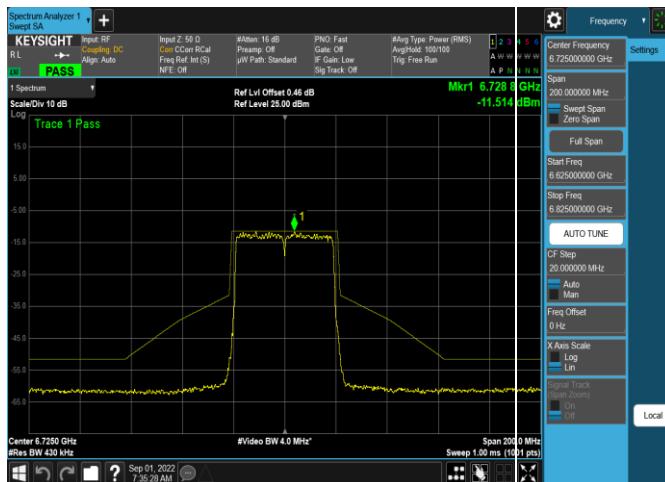


FCC ID: BCGA2764 IC: 579C-A2764	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-21-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 150 of 282

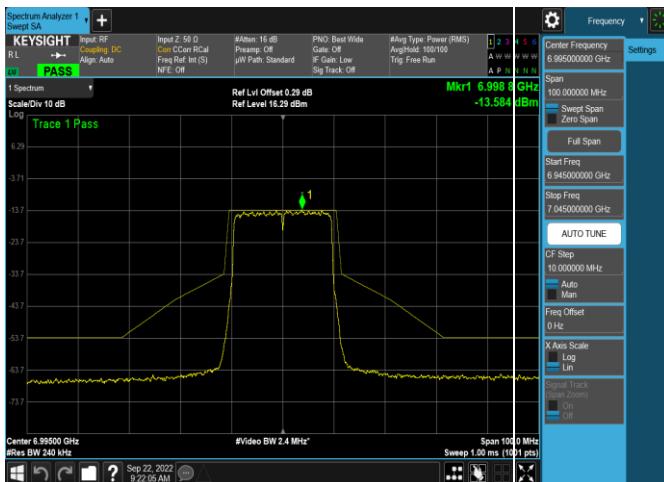


Plot 7-521. In-Band Emission Plot SDM Antenna 5b (20MHz)
802.11ax (UNII Band 8) – Ch. 209, MCS4

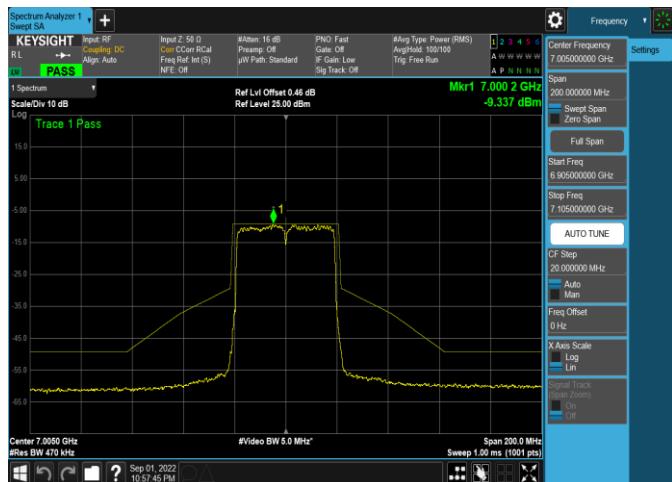


Plot 7-524. In-Band Emission Plot SDM Antenna 4a (40MHz)
802.11ax (UNII Band 8) – Ch. 211, MCS4

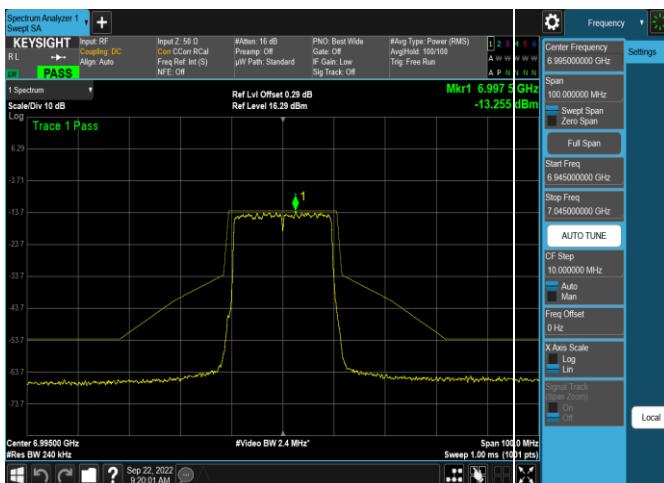


Plot 7-522. In-Band Emission Plot SDM Antenna 4a (20MHz)
802.11ax (UNII Band 8) – Ch. 209, MCS4

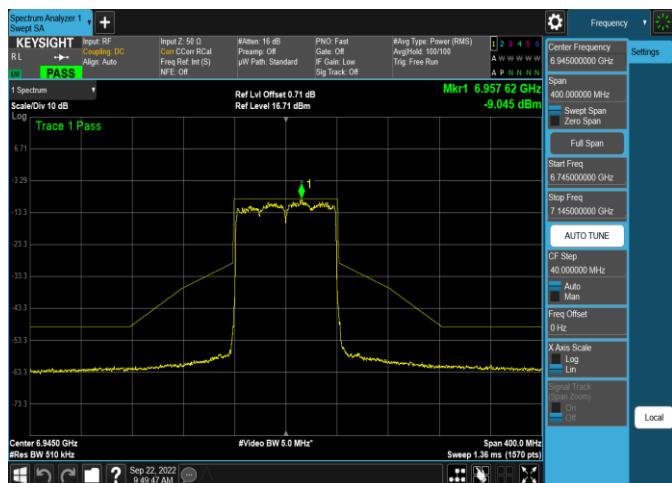

Plot 7-525. In-Band Emission Plot SDM Antenna 5b (80MHz)
802.11ax (UNII Band 8) – Ch. 199, MCS4

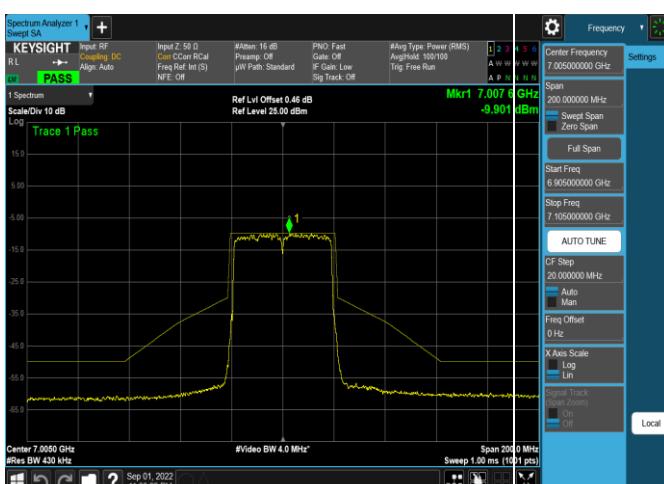

Plot 7-523. In-Band Emission Plot SDM Antenna 5b (40MHz)
802.11ax (UNII Band 8) – Ch. 211, MCS4

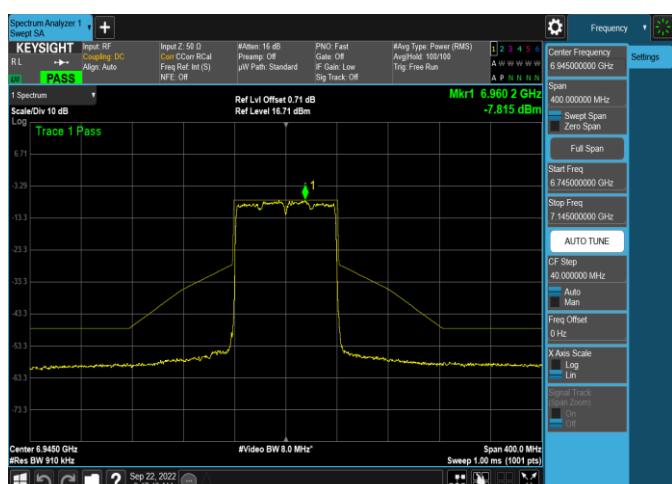

Plot 7-526. In-Band Emission Plot SDM Antenna 4a (80MHz)
802.11ax (UNII Band 8) – Ch. 199, MCS4







FCC ID: BCGA2764 IC: 579C-A2764	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-21-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 151 of 282

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.



FCC ID: BCGA2764 IC: 579C-A2764	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-21-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 152 of 282

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

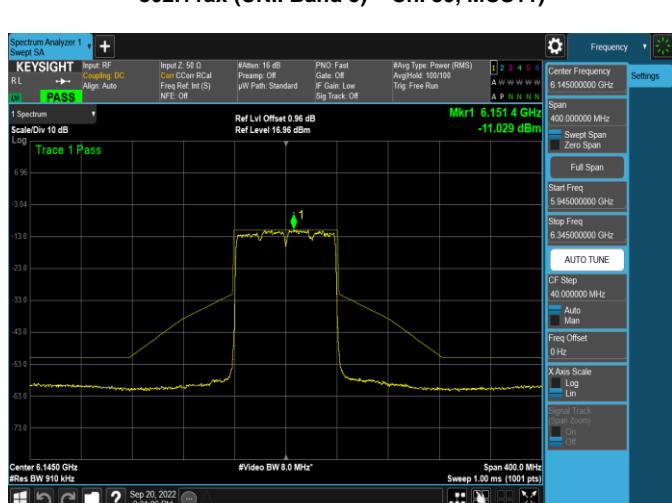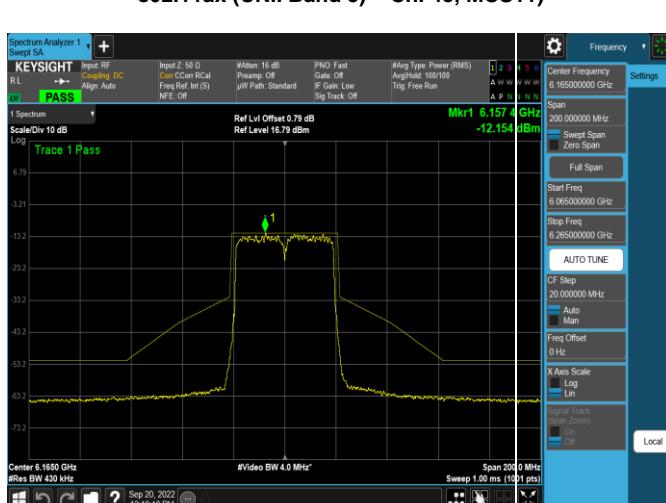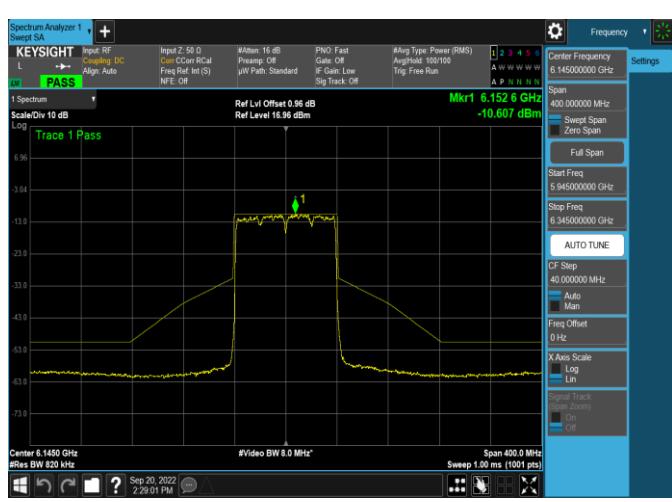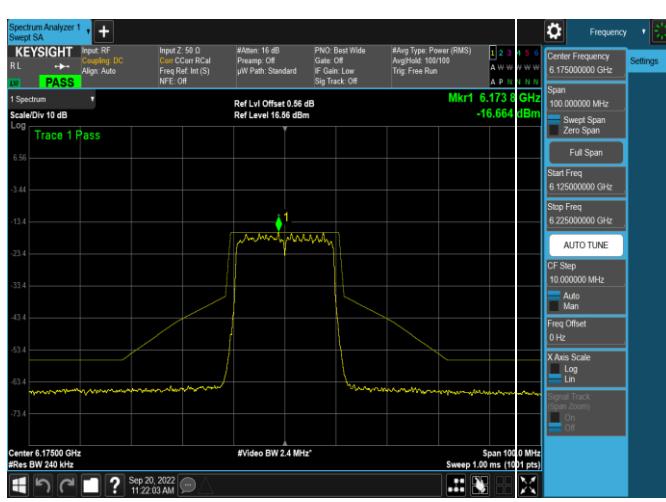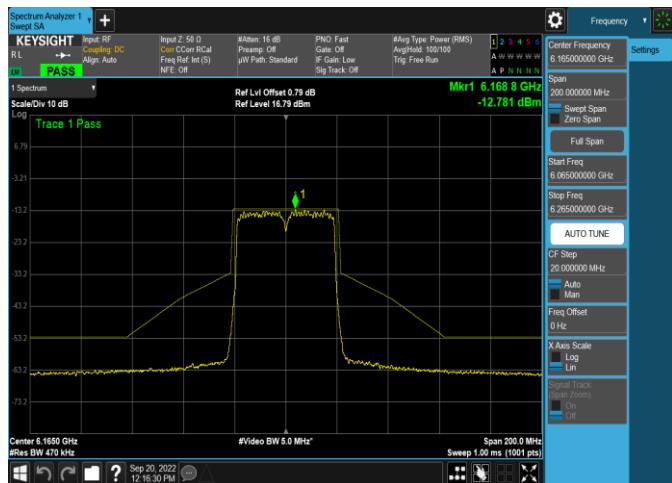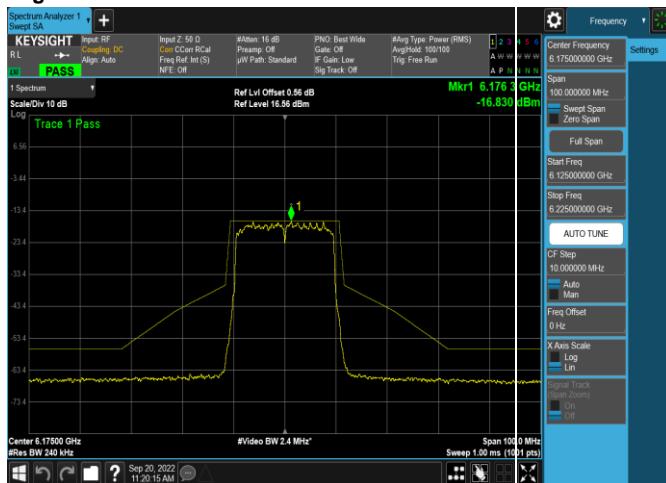High Data Rate


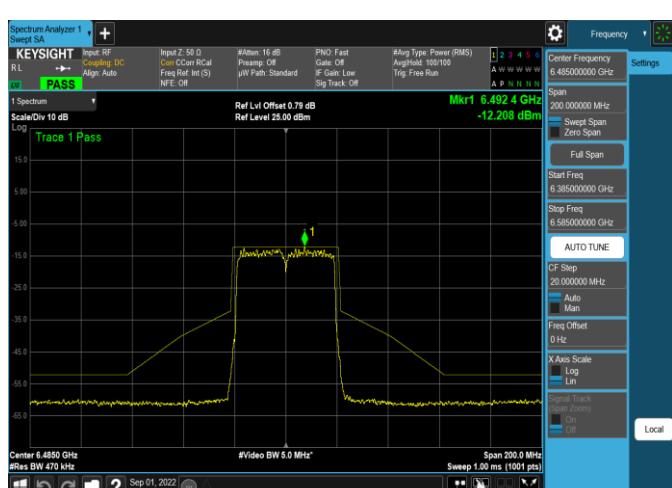
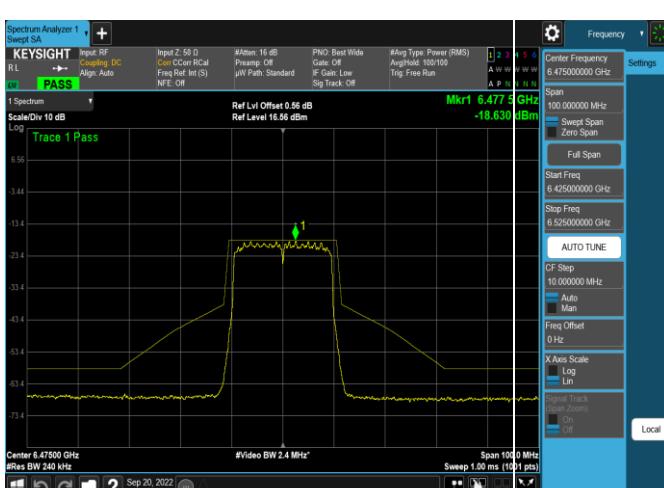
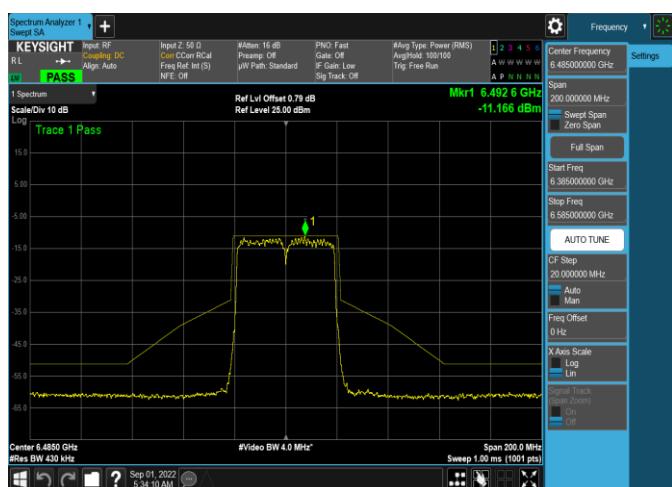
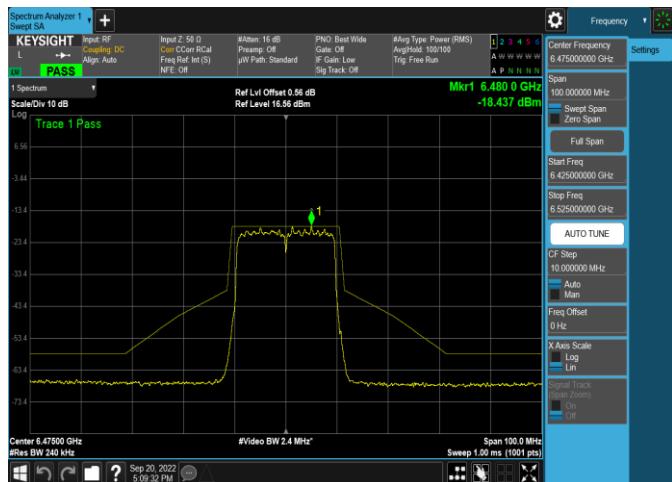
FCC ID: BCGA2764	
IC: 579C-A2764	
Test Report S/N: 1C2205090028-21-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022

**MEASUREMENT REPORT
(CERTIFICATION)**
Approved by:
Technical Manager





Page 153 of 282

V 10.5 12/15/2021






Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.




FCC ID: BCGA2764 IC: 579C-A2764	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-21-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 154 of 282

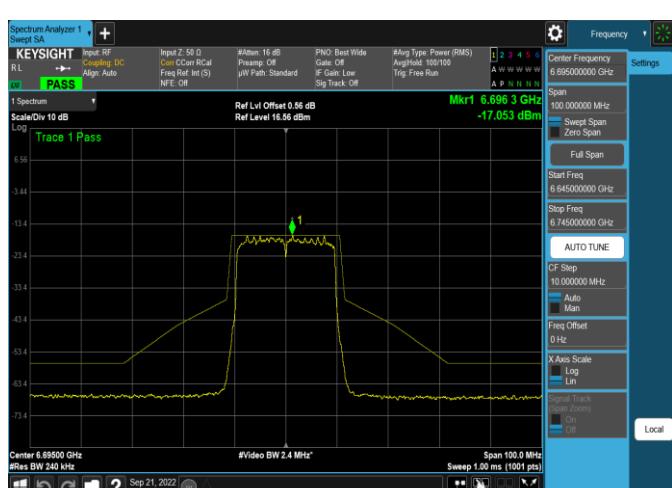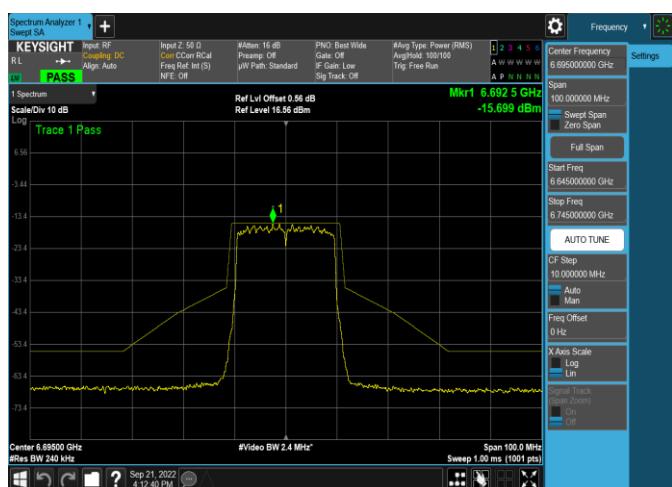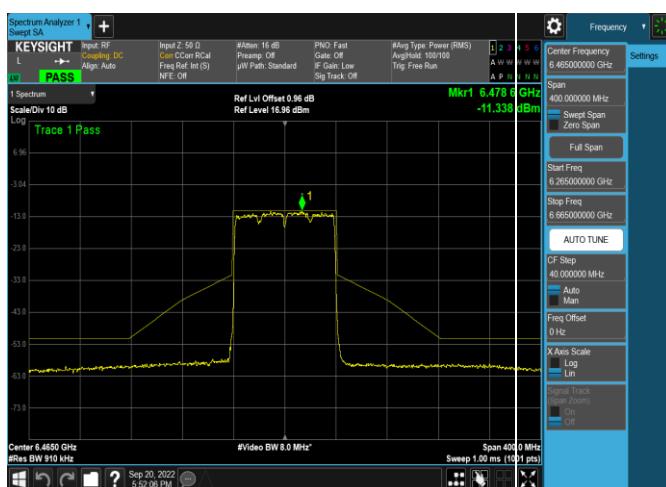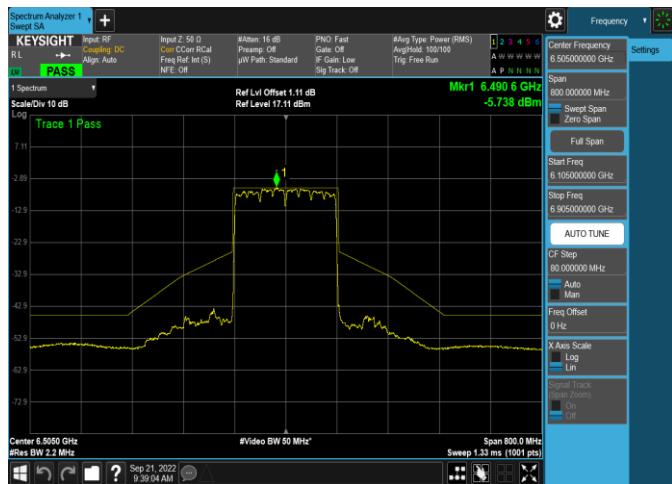


FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-21-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 155 of 282

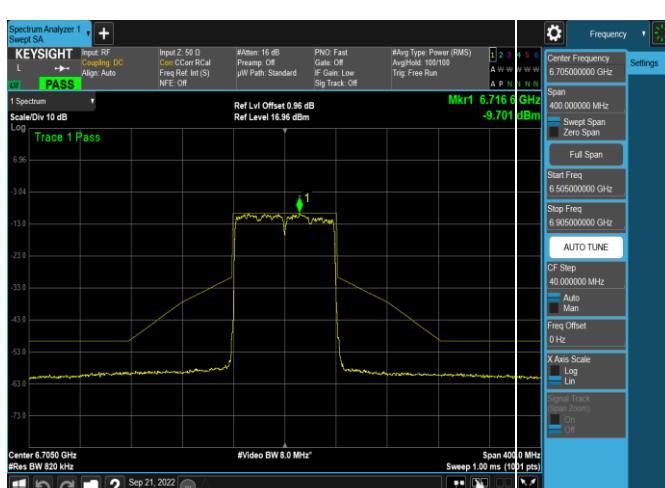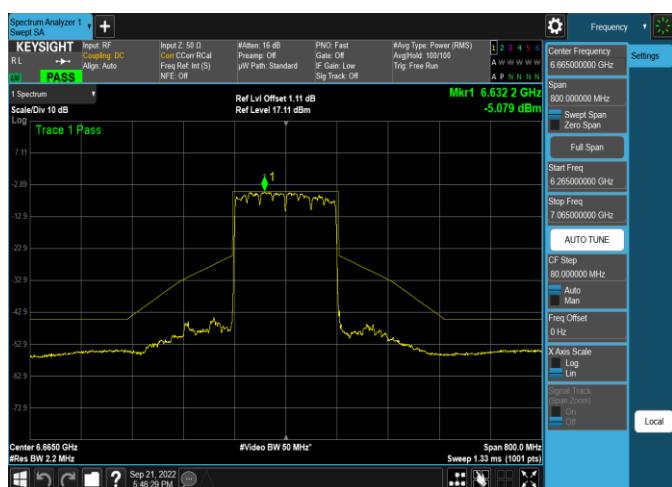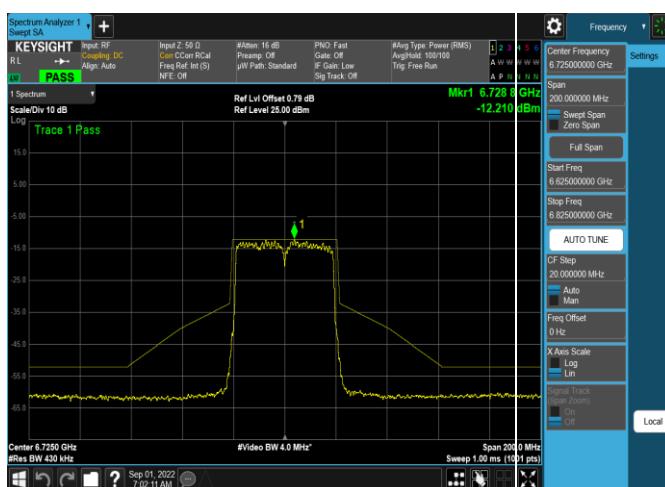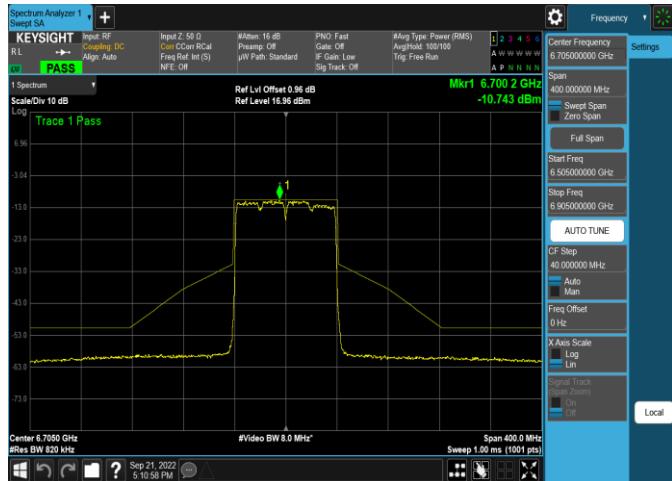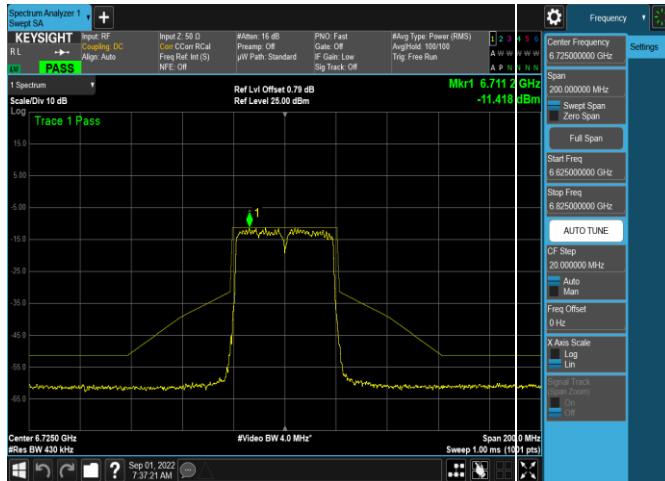


FCC ID: BCGA2764 IC: 579C-A2764	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-21-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 156 of 282

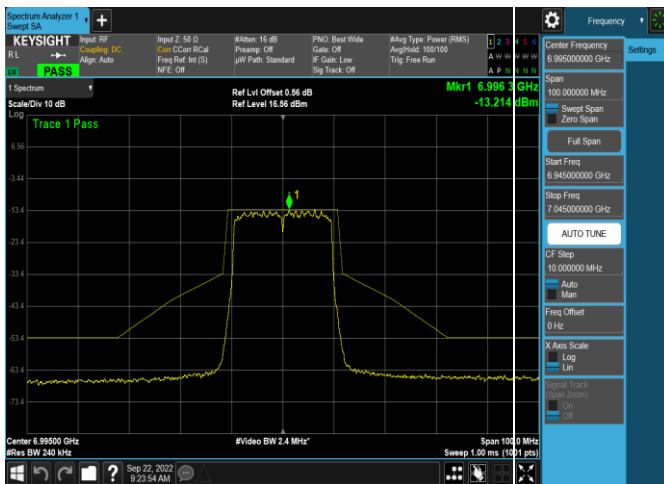


Plot 7-553. In-Band Emission Plot SDM Antenna 5b (20MHz)
802.11ax (UNII Band 8) – Ch. 209, MCS11

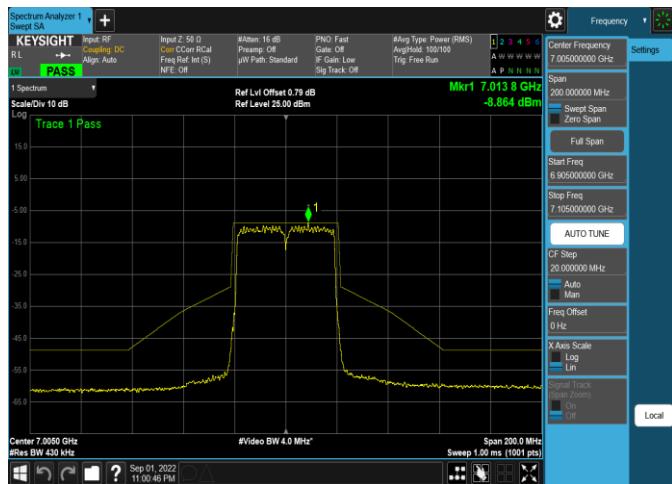


Plot 7-556. In-Band Emission Plot SDM Antenna 4a (40MHz)
802.11ax (UNII Band 8) – Ch. 211, MCS11

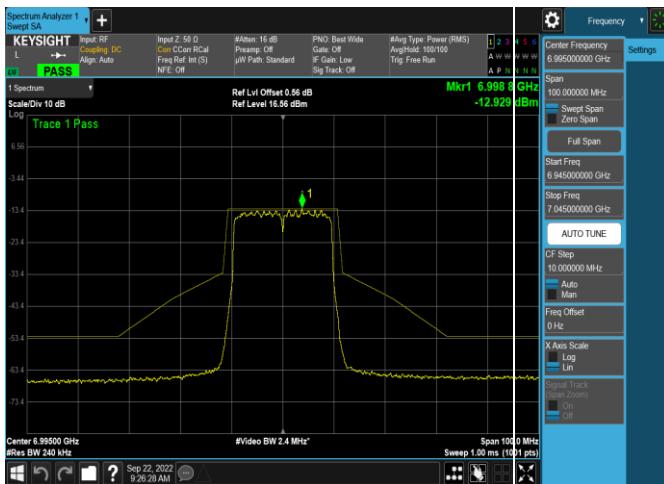


Plot 7-554. In-Band Emission Plot SDM Antenna 4a (20MHz)
802.11ax (UNII Band 8) – Ch. 209, MCS11

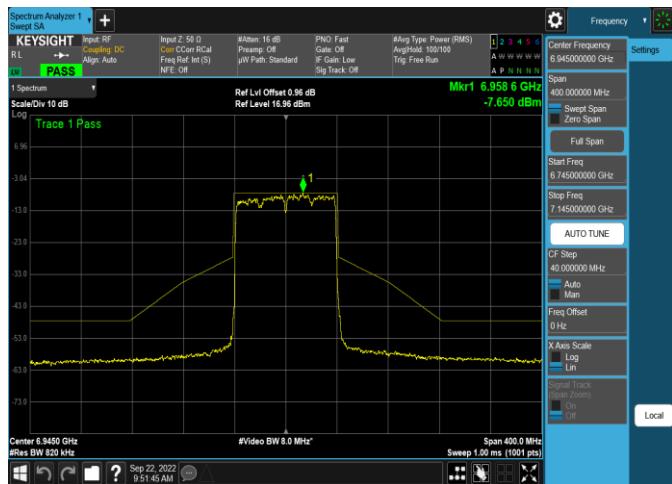

Plot 7-557. In-Band Emission Plot SDM Antenna 5b (80MHz)
802.11ax (UNII Band 8) – Ch. 199, MCS11

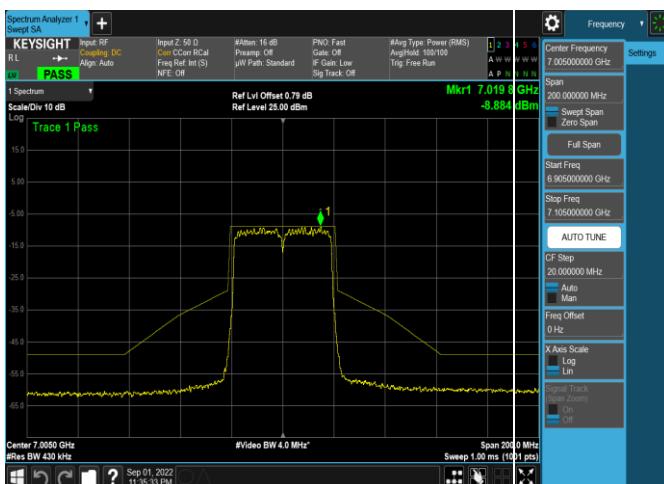


Plot 7-555. In-Band Emission Plot SDM Antenna 5b (40MHz)
802.11ax (UNII Band 8) – Ch. 211, MCS11

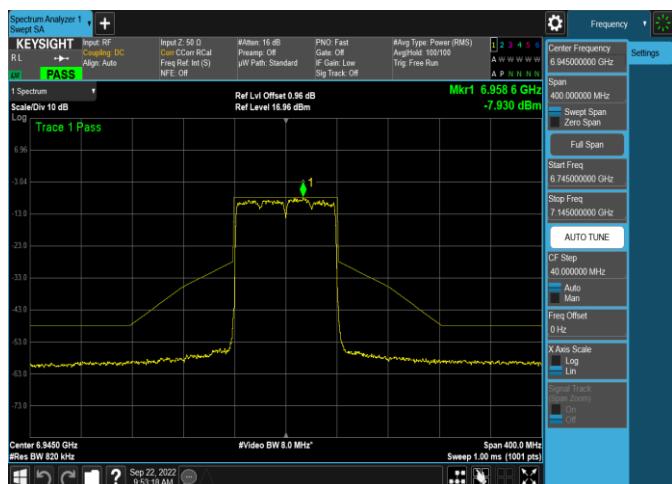

Plot 7-558. In-Band Emission Plot SDM Antenna 4a (80MHz)
802.11ax (UNII Band 8) – Ch. 199, MCS11

FCC ID: BCGA2764 IC: 579C-A2764	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-21-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 157 of 282

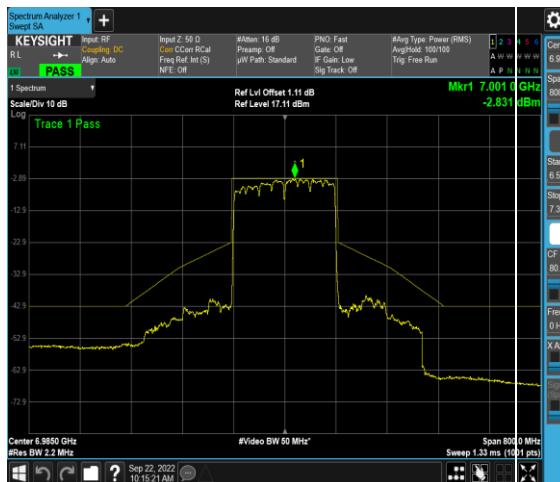

FCC ID: BCGA2764	IC: 579C-A2764
Test Report S/N: 1C2205090028-21-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022


**MEASUREMENT REPORT
(CERTIFICATION)**
Approved by:
Technical Manager

Page 158 of 282

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.6 Contention Based Protocol – 802.11a/ax(SU)

§15.407(d)(6), RSS-248 [4.8]

Test Overview and Limit

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band (herein referred to as unlicensed devices) are required to use technologies that include a contention-based protocol to avoid co-channel interference with incumbent devices sharing the band. To ensure incumbent co-channel operations are detected in a technology-agnostic manner, unlicensed devices are required to detect co-channel radio frequency energy (energy detect) and avoid simultaneous transmission.

Unlicensed indoor low-power devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain.

To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.2.2

KDB 987594 D02 v01r01

Test Settings

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT.
4. Connect the output port of the EUT to the signal analyzer 2, as shown in Figure 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
5. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
6. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
7. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in Figure 2.
8. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
9. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
10. Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
11. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

FCC ID: BCGA2764 IC: 579C-A2764	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-21-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 159 of 282

Test Setup

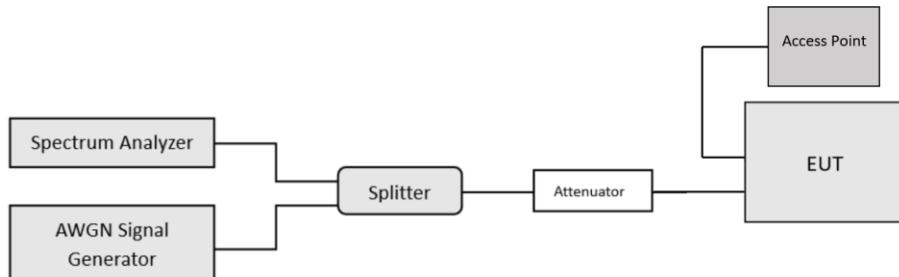


Figure 7-5. Contention-based protocol test setup, conducted method

Test Notes

1. Per guidance from KDB 987594 D02 v01r01, contention-based protocol was tested using an AWGN signal with a bandwidth of 10MHz. The amplitude of the signal was increased until detected by the EUT, signaled by the ceasing of transmission, marker indicates the point at which the AWGN signal is introduced.
2. Per KDB 987594 D04 v01, contention-based protocol was tested with receiver with the lowest antenna gain.
3. 15 trials were ran in order to assure that at least 90% of certainty was met.

Detection Level = Injected AWGN Power (dBm) – Antenna Gain (dBi) + Path Loss (dB)

Equation 7-1. Incumbent Detection Level Calculation

FCC ID: BCGA2764 IC: 579C-A2764	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-21-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 160 of 282

Band	Channel	Channel Frquency [MHz]	Channel BW [MHz]	Incumbent Frequency [MHz]	Injected (AWGN) [dBm]	Antenna Gain [dBi]	Adjusted Power Level [dBm]	Detection Limit [dBm]	Margin [dB]
UNII Band 5	53	6215	20	6215	-70.33	-1.50	-68.83	-62.0	-6.83
	47	6185	160	6110	-67.68	-1.50	-66.18	-62.0	-4.18
				6185	-68.83	-1.50	-67.33	-62.0	-5.33
				6260	-65.98	-1.50	-64.48	-62.0	-2.48
UNII Band 6	101	6455	20	6455	-71.71	-0.20	-71.51	-62.0	-9.51
	111	6505	160	6430	-70.32	-0.30	-70.02	-62.0	-8.02
				6505	-70.12	-0.20	-69.92	-62.0	-7.92
				6580	-66.52	-0.20	-66.32	-62.0	-4.32
UNII Band 7	149	6695	20	6695	-70.29	-0.80	-69.49	-62.0	-7.49
	143	6665	160	6590	-67.69	-0.20	-67.49	-62.0	-5.49
				6665	-67.99	-0.20	-67.79	-62.0	-5.79
				6740	-65.69	-2.90	-62.79	-62.0	-0.79
UNII Band 8	197	6935	20	6935	-70.72	-4.50	-66.22	-62.0	-4.22
	207	6985	160	6910	-69.52	-4.50	-65.02	-62.0	-3.02
				6985	-70.42	-4.90	-65.52	-62.0	-3.52
				7060	-68.02	-5.10	-62.92	-62.0	-0.92

Table 7-53. Contention Based Protocol – Incumbent Detection Results

Band	Channel	Channel Frquency [MHz]	Channel BW [MHz]	Incumbent Frequency [MHz]	EUT Transmission Status		
					Adjusted AWGN Power (dBm)		
					Normal	Minimal	Ceased
UNII Band 5	53	6215	20	6215	-80.83	-71.33	-68.83
	47	6185	160	6110	-78.18	-68.68	-66.18
				6185	-79.33	-69.83	-67.33
				6260	-76.48	-66.98	-64.48
UNII Band 6	101	6455	20	6455	-83.51	-74.01	-71.51
	111	6505	160	6430	-82.02	-72.52	-70.02
				6505	-81.92	-72.42	-69.92
				6580	-78.32	-68.82	-66.32
UNII Band 7	149	6695	20	6695	-81.49	-71.99	-69.49
	175	6825	160	6750	-79.49	-69.99	-67.49
				6825	-79.79	-70.29	-67.79
				6900	-74.79	-65.29	-62.79
UNII Band 8	197	6935	20	6935	-78.22	-68.72	-66.22
	207	6985	160	6910	-77.02	-67.52	-65.02
				6985	-77.52	-68.02	-65.52
				7060	-74.92	-65.42	-62.92

Table 7-54. Contention Based Protocol – Detection Results – All Tx Cases


FCC ID: BCGA2764 IC: 579C-A2764	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-21-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 161 of 282

Band	Channel	Channel Frequency [MHz]	Channel BW [MHz]	CBP Detection (1 = Detection, Blank = No Detection)															Detection Rate [%]	Limit [%]	Pass/Fail
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15			
UNII Band 5	53	6215	20	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
	47	6185		1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
UNII Band 6	101	6455	20	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
	111	6505		1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
UNII Band 7	149	6695	20	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
	175	6665		1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
UNII Band 8	197	6935	20	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
	207	6985		1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	


Table 7-55. Contention Based Protocol – Incumbent Detection Trial Results

FCC ID: BCGA2764 IC: 579C-A2764	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-21-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 162 of 282

AWGN Plots

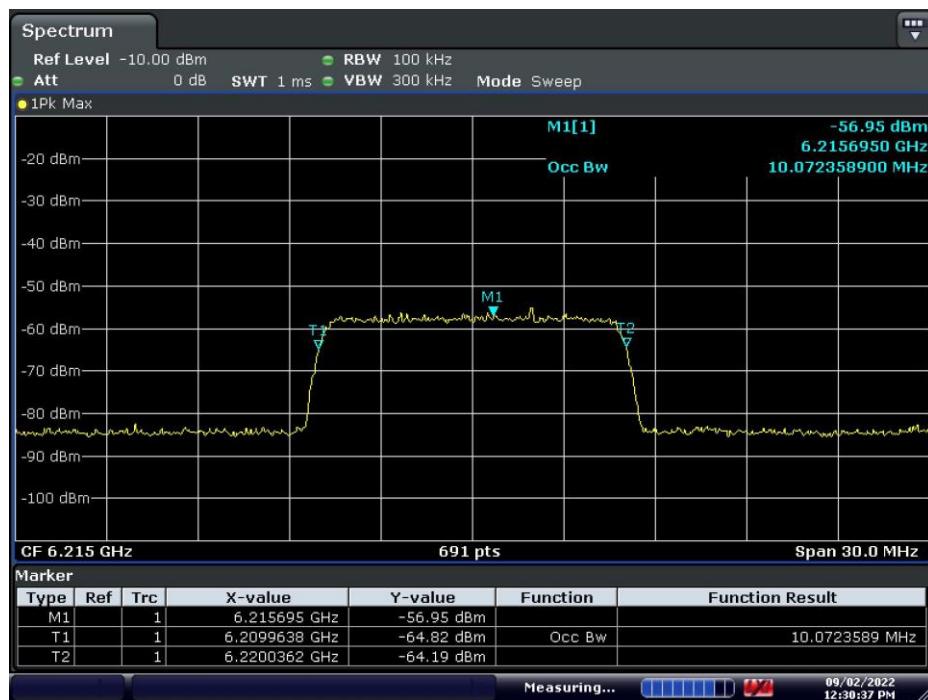


Plot 7-561. AWGN Signal – UNII 5 – 20MHz

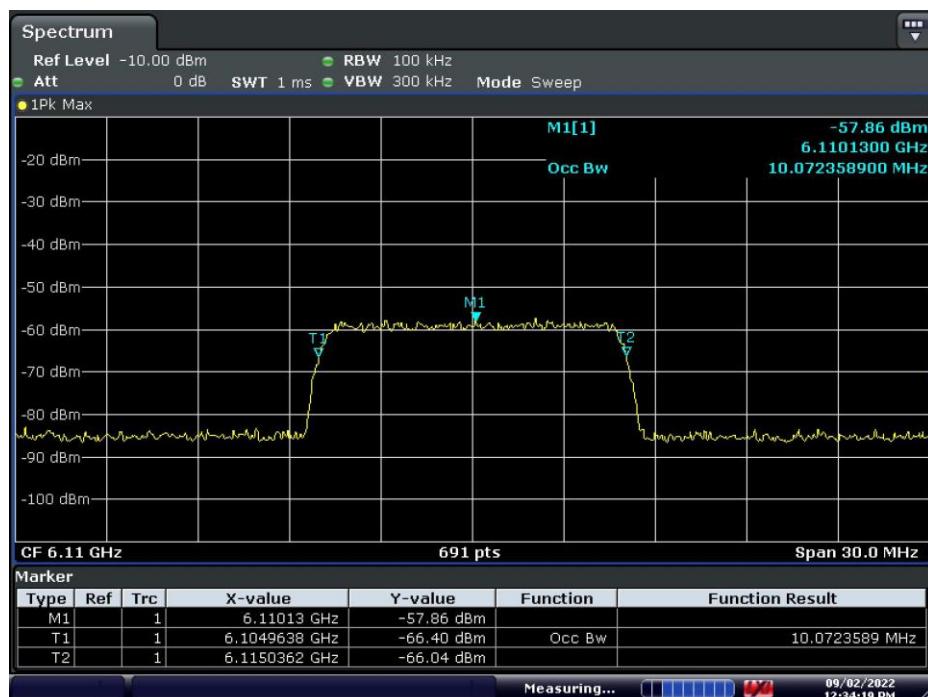


Plot 7-562. AWGN Signal – UNII 5 – 160MHz - Low

FCC ID: BCGA2764 IC: 579C-A2764	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-21-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 163 of 282

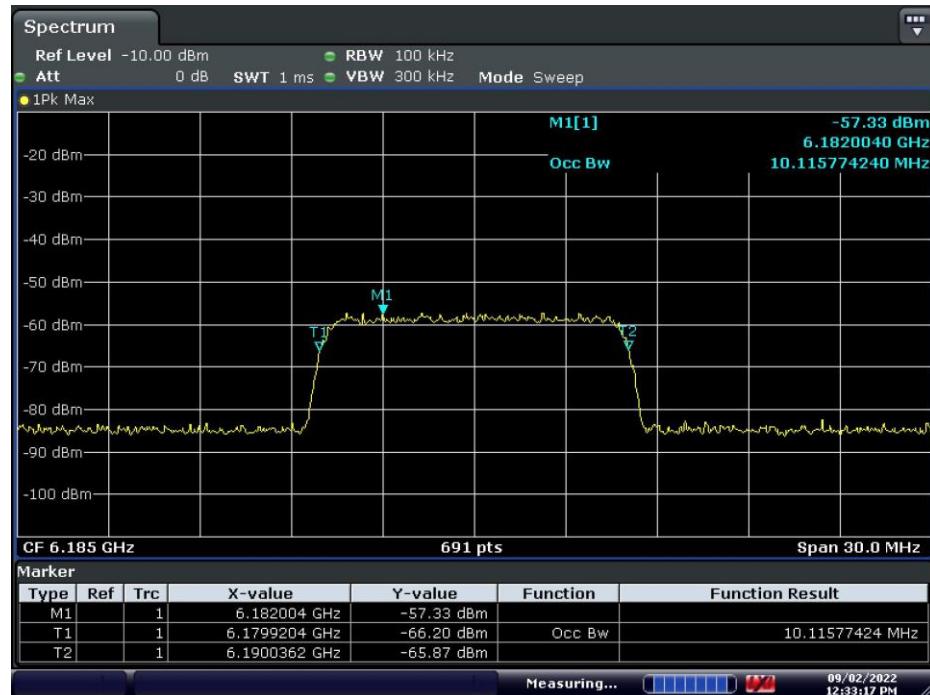


Plot 7-563. AWGN Signal – UNII 5 – 160MHz – Mid

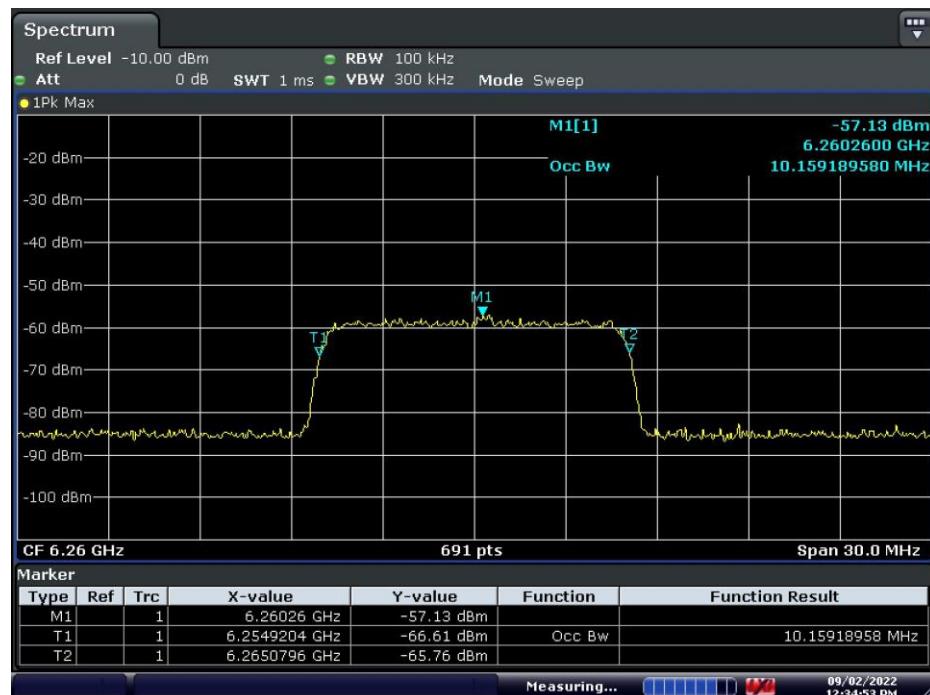


Plot 7-564. AWGN Signal – UNII 5 – 160MHz - High

FCC ID: BCGA2764 IC: 579C-A2764	 element MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2205090028-21-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 164 of 282	

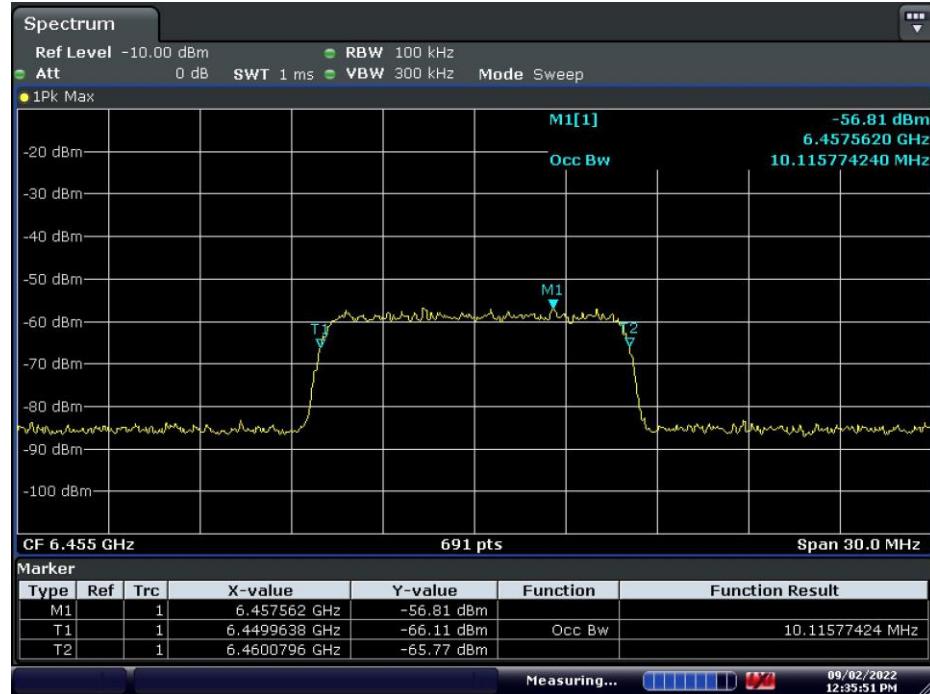

Plot 7-565. AWGN Signal – UNII 6 – 20MHz

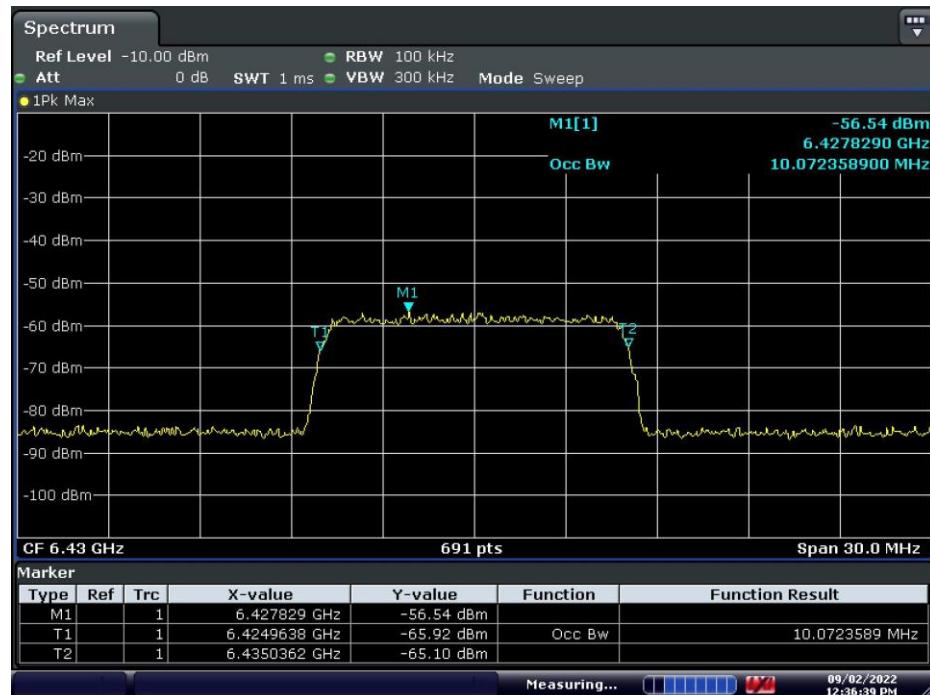


Plot 7-566. AWGN Signal – UNII 6 – 160MHz - Low

FCC ID: BCGA2764 IC: 579C-A2764	 element MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2205090028-21-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 165 of 282	



Plot 7-567. AWGN Signal – UNII 6 – 160MHz – Mid

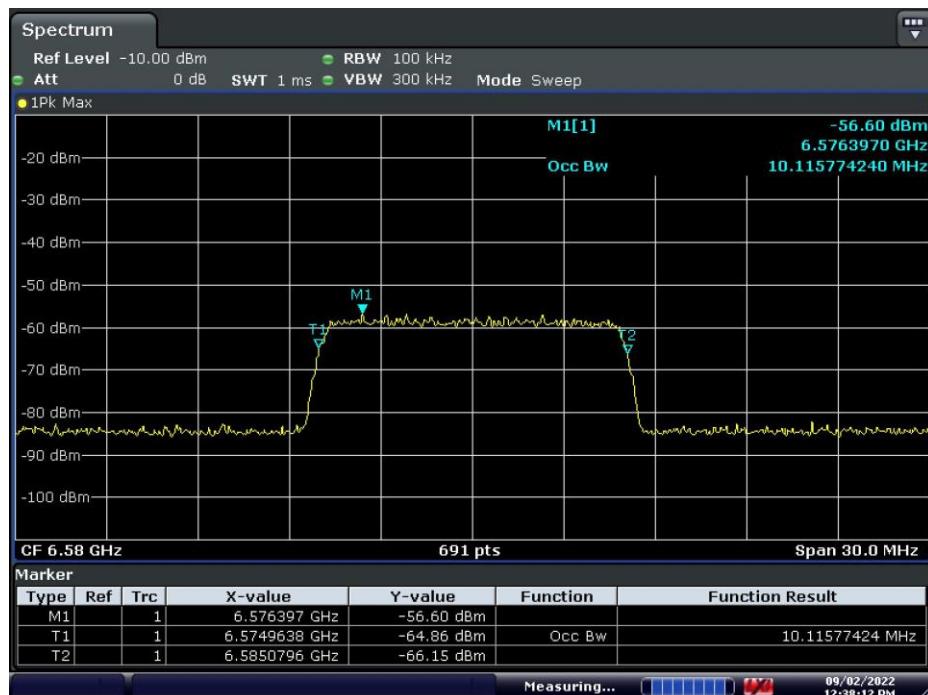


Plot 7-568. AWGN Signal – UNII 6 – 160MHz - High

FCC ID: BCGA2764 IC: 579C-A2764	 element MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2205090028-21-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 166 of 282	



Plot 7-569. AWGN Signal – UNII 7 – 20MHz

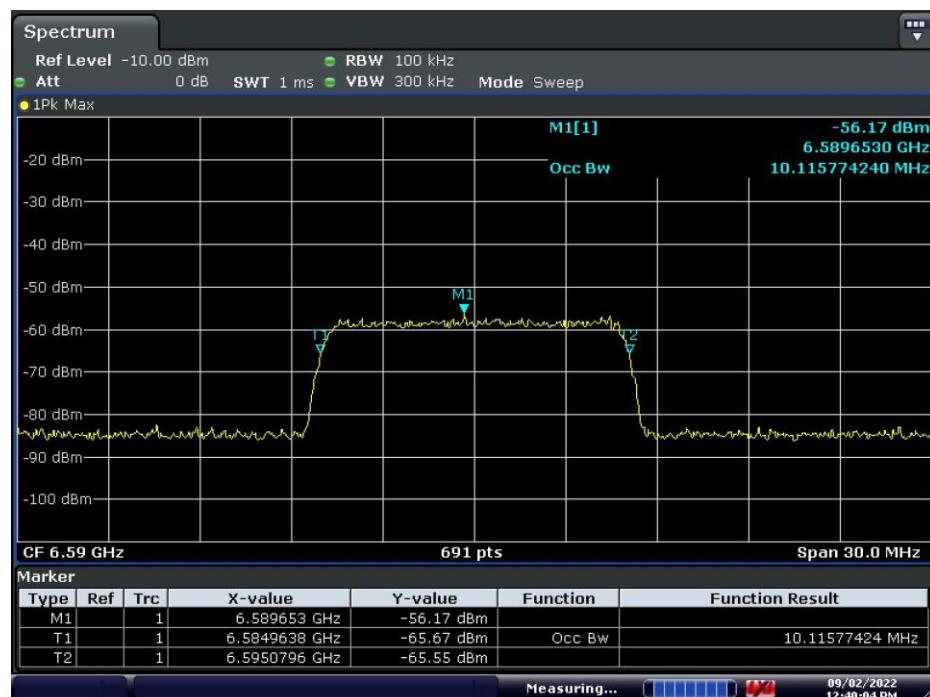

Plot 7-570. AWGN Signal – UNII 7 – 160MHz - Low

FCC ID: BCGA2764 IC: 579C-A2764	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-21-R2.BCG	Test Dates: 5/30/2022 - 9/16/2022	EUT Type: Tablet Device	Page 167 of 282