

FCC and ISED Test Report

Apple Inc
Model: A2439

In accordance with FCC 47 CFR Part 15C, ISED
RSS-247 and ISED RSS-GEN (2.4 GHz WLAN)

Prepared for: Apple Inc
One Apple Park Way, Cupertino, California,
95014, USA

FCC ID: BCGA2439 IC: 579C-A2439

COMMERCIAL-IN-CONFIDENCE

Document 75949506-11 Issue 02



Add value.
Inspire trust.

SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Phil Harrison	Senior Engineer	Authorised Signatory	01 March 2021

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD document control rules.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15C, ISED RSS-247 and ISED RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Testing	Connor Lee	01 March 2021	
Testing	Aasim Butt	01 March 2021	
Testing	Colin Brain	01 March 2021	
Testing	Liang Tian	01 March 2021	
Testing	Jaiyanth Balendrarajah	01 March 2021	
Testing	Mohammad Malik	01 March 2021	
Testing	George Porter	01 March 2021	

FCC Accreditation

90987 Octagon House, Fareham Test Laboratory

ISED Accreditation

12669A Octagon House, Fareham Test Laboratory

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15C: 2019, ISED RSS-247: Issue 2 (02-2017) and ISED RSS-GEN: Issue 5 (04-2018) + A1 (03-2019) for the tests detailed in section 1.3.



DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD. No part of this document may be reproduced without the prior written approval of TÜV SÜD. © 2021 TÜV SÜD. This report relates only to the actual item/items tested.

ACCREDITATION

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation. Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

TÜV SÜD
is a trading name of TÜV SÜD Ltd
Registered in Scotland at East Kilbride,
Glasgow G75 0QF, United Kingdom
Registered number: SC215164

TÜV SÜD Ltd is a
TÜV SÜD Group Company

Phone: +44 (0) 1489 558100
Fax: +44 (0) 1489 558101
www.tuv-sud.co.uk

TÜV SÜD
Octagon House
Concorde Way
Fareham
Hampshire PO15 5RL
United Kingdom



Contents

1	Report Summary	2
1.1	Report Modification Record.....	2
1.2	Introduction.....	2
1.3	Brief Summary of Results	3
1.4	Product Information	4
1.5	Deviations from the Standard.....	5
1.6	EUT Modification Record	5
1.7	Test Location	6
2	Test Details	7
2.1	Maximum Conducted Output Power	7
2.2	Power Spectral Density	11
2.3	Emission Bandwidth	18
2.4	Authorised Band Edges	51
2.5	Restricted Band Edges.....	59
2.6	Spurious Radiated Emissions	79
3	Measurement Uncertainty	125



1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	10 February 2021
2	Serial Number C02DM007OFTP amended to C02DM0070FTP	01 March 2021

Table 1

1.2 Introduction

Applicant	Apple Inc
Manufacturer	Apple Inc
Model Number(s)	A2439
Serial Number(s)	C02DM0070FTP and C02DM00M0FTN
Hardware Version(s)	REV 1.0
Software Version(s)	20W430340t
Number of Samples Tested	2
Test Specification/Issue/Date	FCC 47 CFR Part 15C: 2019 ISED RSS-247: Issue 2 (02-2017) ISED RSS-GEN: Issue 5 (04-2018) + A1 (03-2019)
Order Number	0540205414
Date	13-July-2020
Date of Receipt of EUT	09-October-2020
Start of Test	10-November-2020
Finish of Test	13-January-2021
Name of Engineer(s)	Connor Lee, Aasim Butt, Colin Brain, Liang Tian, Jaiyanth Balendrarajah and Mohammad Malik and George Porter
Related Document(s)	ANSI C63.10 (2013) KDB 662911 D01 v02r01



1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15C, ISSED RSS-247 and ISSED RSS-GEN is shown below.

Section	Specification Clause			Test Description	Result	Comments/Base Standard
	Part 15C	RSS-247	RSS-GEN			
Configuration and Mode: 2.4 GHz WLAN						
-	15.203	-	-	Antenna Requirement	N/T	The devices complies with the provisions of this section, as it uses a permanently attached integral antenna.
2.1	15.247 (b)	5.4	6.12	Maximum Conducted Output Power	Pass	
2.2	15.247 (e)	5.2	6.12	Power Spectral Density	Pass	
2.3	15.247 (a)(2)	5.2	6.7	Emission Bandwidth	Pass	
2.4	15.247 (d)	5.5	-	Authorised Band Edges	Pass	
2.5	15.205	-	8.10	Restricted Band Edges	Pass	
2.6	15.247 (d) and 15.205	5.5	6.13	Spurious Radiated Emissions	Pass	

Table 2



1.4 Product Information

1.4.1 Technical Description

The Equipment Under Test (EUT) was a desktop computer with Bluetooth, Bluetooth Low Energy and 802.11 a/b/g/n/ac/ax capabilities in the 2.4 GHz and 5 GHz bands.

1.4.2 Test Modes

The 2.4 GHz 802.11 radio supports SISO and 2x2 MIMO. 802.11b and 802.11g only supports SISO operation. 802.11n and 802.11ax are supported for both SISO and 2x2 MIMO at 20 MHz channel bandwidths only. 802.11ax supports Single User (SU) and Multi-User MIMO (MU-MIMO) modes. MU-MIMO modes support Resource Unit (RU) sizes of 26/52/106/242 subcarriers.

The EUT uses different output powers per core dependent on how many cores are used. It uses the same conducted power across all cores in any given mode, but due to the different antenna gains the radiated power per core differs.

After preliminary investigations were performed, the EUT was therefore tested in the following worst-case modes:

- SISO Modes (Core 1):
 - 802.11b 1 Mbps
 - 802.11g 6 Mbps
 - 802.11n HT20 MCS7
 - 802.11ax HE20 MCS7x1 SU & MU
- 2x2 MIMO Modes (Core 0 + Core 1):
 - 802.11n HT20 MCS7 - CDD
 - 802.11ax HE20 MCS7x1 SU & MU - CDD

For 802.11ax modes, only SU modes (highest power) are reported for Output Power. For Bandwidth tests, only SU modes (widest BW) and MU-MIMO with 26 subcarriers (narrowest) are reported. For Power Spectral Density (PSD), RU sizes of 26 to 106 subcarriers are reported.



1.4.3 Test Set-up

For conducted tests the EUT antennas were disconnected and replaced with U.FL to SMA test cables to enable conducted testing on each core. The loss of these test cables were known and compensated for in any conducted measurements.

For all tests, the EUT was put into a continuous transmit test mode with the chipset manufacturer's test commands via a script running in the EUTs terminal application. The EUT then transmitted the required type of packeted 802.11 data frames of fixed length, containing the standard headers and with pseudo-random data content, ensuring the measured signals were representative and contained all the symbols at the highest power control level.

All testing was performed with the EUT powered via a 120 V AC, 60 Hz source.

1.4.4 Antenna Gain Table (2.4GHz WLAN)

Antenna Port	Frequency Range (MHz)	Peak Gain (dBi)	Conducted Cable Loss (dB)
Core 0	2400 to 2480	-0.10	1.90
Core 1	2400 to 2480	3.33	1.90

Table 3

1.5 Deviations from the Standard

No deviations from the applicable test standard were made during testing.

1.6 EUT Modification Record

The table below details modifications made to the EUT during the test programme.

The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
Model: A2439, Serial Number: C02DM0070FTP			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A2439, Serial Number: C02DM00M0FTN			
0	As supplied by the customer	Not Applicable	Not Applicable

Table 4



1.7 Test Location

TÜV SÜD conducted the following tests at our Fareham Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: 2.4 GHz WLAN		
Maximum Conducted Output Power	George Porter	UKAS
Power Spectral Density	George Porter	UKAS
Emission Bandwidth	George Porter	UKAS
Authorised Band Edges	Connor Lee, Aasim Butt, Colin Brain, Liang Tian, Jaiyanth Balendrarajah and Mohammad Malik	UKAS
Restricted Band Edges	Connor Lee, Aasim Butt, Colin Brain, Liang Tian, Jaiyanth Balendrarajah and Mohammad Malik	UKAS
Spurious Radiated Emissions	Connor Lee, Aasim Butt, Colin Brain, Liang Tian, Jaiyanth Balendrarajah and Mohammad Malik	UKAS

Table 5

Office Address:

Octagon House, Concorde Way
Segensworth North, Fareham
Hampshire, PO15 5RL
United Kingdom



2 Test Details

2.1 Maximum Conducted Output Power

2.1.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (b)
ISED RSS-247, Clause 5.4
ISED RSS-GEN, Clause 6.12

2.1.2 Equipment Under Test and Modification State

A2439, S/N: C02DM0070FTP - Modification State 0

2.1.3 Date of Test

18-December-2020 to 13-January-2021

2.1.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 11.9.2.3.2 Method AVGPM-G.

The output power was verified as being the same from each transmit core, but the antenna gains were not identical, therefore the modes reported for SISO operation are those giving the highest EIRP and/or lowest conducted limit based on the antenna giving highest directional gain.

MIMO output port summing was performed in accordance with KDB 662911 D01. Directional Gain was calculated in accordance with clause F)2)f)(ii) using the calculations from F)2)f)(i) with worst-case individual gain and an array gain of zero.

2.1.5 Environmental Conditions

Ambient Temperature	20.9 - 26.3 °C
Relative Humidity	22.4 - 50.1 %



2.1.6 Test Results

2.4 GHz WLAN

Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
Antenna Directional Gain (dBi)	3.33	3.33	3.33
15.247 Conducted Power Limit (dBm)	30.00	30.00	30.00
RSS-247 Conducted Power Limit (dBm)	30.00	30.00	30.00
Conducted Power (dBm)	18.92	21.85	11.84
RSS-247 EIRP Limit (dBm)	36.00	36.00	36.00
EIRP Power (dBm)	22.25	25.18	15.16

Table 6 - 802.11b / 1 Mbps / SISO / Core 1

Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
Antenna Directional Gain (dBi)	3.33	3.33	3.33
15.247 Conducted Power Limit (dBm)	30.00	30.00	30.00
RSS-247 Conducted Power Limit (dBm)	30.00	30.00	30.00
Conducted Power (dBm)	14.29	21.81	2.79
RSS-247 EIRP Limit (dBm)	36.00	36.00	36.00
EIRP Power (dBm)	17.62	25.14	6.12

Table 7 - 802.11g / 6 Mbps / SISO / Core 1

Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
Antenna Directional Gain (dBi)	3.33	3.33	3.33
15.247 Conducted Power Limit (dBm)	30.00	30.00	30.00
RSS-247 Conducted Power Limit (dBm)	30.00	30.00	30.00
Conducted Power (dBm)	14.50	21.93	2.58
RSS-247 EIRP Limit (dBm)	36.00	36.00	36.00
EIRP Power (dBm)	17.83	25.26	5.91

Table 8 - 802.11n / HT20 MCS7 / SISO / Core 1



Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
Conducted Power Core 0 (dBm)	14.38	21.80	2.15
Conducted Power Core 1 (dBm)	14.26	21.86	2.13
Antenna Directional Gain (dBi)	3.33	3.33	3.33
15.247 Conducted Power Limit (dBm)	30.00	30.00	30.00
RSS-247 Conducted Power Limit (dBm)	30.00	30.00	30.00
Total Conducted Power (dBm)	17.33	24.84	5.15
RSS-247 EIRP Limit (dBm)	36.00	36.00	36.00
EIRP Power (dBm)	20.66	28.17	8.48

Table 9 - 802.11n / HT20 MCS7 / MIMO CDD / Cores 0+1

Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
Antenna Directional Gain (dBi)	3.33	3.33	3.33
15.247 Conducted Power Limit (dBm)	30.00	30.00	30.00
RSS-247 Conducted Power Limit (dBm)	30.00	30.00	30.00
Conducted Power (dBm)	14.42	21.93	2.86
RSS-247 EIRP Limit (dBm)	36.00	36.00	36.00
EIRP Power (dBm)	17.75	25.26	6.19

Table 10 - 802.11ax / HE20 MCS7x1 / SU / SISO / Core 1

Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
Conducted Power Core 0 (dBm)	14.01	21.79	2.20
Conducted Power Core 1 (dBm)	14.06	21.88	2.26
Antenna Directional Gain (dBi)	3.33	3.33	3.33
15.247 Conducted Power Limit (dBm)	30.00	30.00	30.00
RSS-247 Conducted Power Limit (dBm)	30.00	30.00	30.00
Total Conducted Power (dBm)	17.04	24.85	5.24
RSS-247 EIRP Limit (dBm)	36.00	36.00	36.00
EIRP Power (dBm)	20.37	28.18	8.57

Table 11 - 802.11ax / HE20 MCS7x1 / SU / MIMO CDD / Cores 0+1

FCC 47 CFR Part 15, Limit Clause 15.247 (b)(3)

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

ISED RSS-247, Limit Clause 5.4 (d)

For DTSSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e) of the specification.



2.1.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Multimeter	Iso-tech	IDM101	2421	12	30-Oct-2021
Hygrometer	Rotronic	I-1000	3220	12	16-Oct-2021
1800-6000 MHz Power Splitter	Mini-Circuits	ZN2PD-63-S+	4055	-	O/P Mon
1 Metre SMA Cable	Rhophase	3PS-1801A-1000-3PS	4099	12	22-Jun-2021
USB Power Sensor	Boonton	RTP5006	5186	12	02-Dec-2021
AC Programmable Power Supply	iTech	IT7324	5227	-	O/P Mon
USB Power Sensor	Boonton	RTP5006	5280	12	27-Apr-2021
Cable 2.92m	Junkosha	MWX241/B	5411	12	22-Jun-2021
3.5 mm 1m Cable	Junkosha	MWX221-01000DMS	5417	12	22-Jun-2021
3.5 mm 1m Cable	Junkosha	MWX221-01000DMS	5418	12	22-Jun-2021
3.5 mm 2m Cable	Junkosha	MWX221-02000DMS	5430	12	22-Jun-2021
Attenuator 5W 10dB DC-18GHz	Aaren	AT40A-4041-D18-10	5487	12	14-Apr-2021
Attenuator 2W 10dB DC-10GHz	Telegartner	J01156A0031	5575	-	O/P Mon
Attenuator 2W 10dB DC-10GHz	Telegartner	J01156A0031	5579	-	O/P Mon
Attenuator 2W 10dB DC-10GHz	Telegartner	J01156A0031	5580	-	O/P Mon
Attenuator 2W 10dB DC-10GHz	Telegartner	J01156A0031	5581	-	O/P Mon
2-Way Power Divider (2-8 GHz)	Aaren	AT30A-TE0208-2-AF	5685	12	18-Dec-2021
2-Way Power Divider (2-8 GHz)	Aaren	AT30A-TE0208-2-AF	5687	12	18-Dec-2021

Table 12

O/P Mon – Output Monitored using calibrated equipment



2.2 Power Spectral Density

2.2.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (e)
ISED RSS-247, Clause 5.2
ISED RSS-GEN, Clause 5.6.12

2.2.2 Equipment Under Test and Modification State

A2439, S/N: C02DM0070FTP - Modification State 0

2.2.3 Date of Test

18-December-2020 to 13-January-2021

2.2.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 11.10.3 (AVG PSD-1) and 11.10.5 (AVG PSD-2).

Where the EUT duty cycle was $< 98\%$ and repeatable within 2%, the spectrum analyser was set to trace (power) averaging and a duty cycle correction was added as calculated in the result tables below (Method AVG PSD-2). Where the duty cycle was $\geq 98\%$ the spectrum analyser was set to trace (power) averaging and no duty cycle correction made (Method AVG PSD-1).

The output power was verified as being the same from each transmit core, but the antenna gains were not identical, therefore the modes reported for SISO operation are those giving the highest EIRP and/or lowest conducted limit based on the antenna giving highest directional gain.

MIMO output port summing was performed in accordance with KDB 662911 D01. The Directional Gain was calculated in accordance with the equation given in clause F)2)f)(ii) summed for a single spatial stream.

2.2.5 Environmental Conditions

Ambient Temperature	20.9 - 26.3 °C
Relative Humidity	22.4 - 50.1 %



2.2.6 Test Results

2.4 GHz WLAN

Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
Raw Conducted PSD (dBm/30kHz)	-2.82	-0.70	-9.51
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1
15.247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
RSS-247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
Conducted PSD Result (dBm/30kHz)	-2.82	-0.70	-9.51

Table 13 - 802.11b / 1 Mbps / SISO / Core 1

Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
Raw Conducted PSD (dBm/30kHz)	-8.22	-1.96	-19.52
Duty Cycle Correction (dB)	N/A SA-1	N/A SA-1	N/A SA-1
15.247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
RSS-247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
Conducted PSD Result (dBm/30kHz)	-8.22	-1.96	-19.52

Table 14 - 802.11g / 6 Mbps / SISO / Core 1

Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
Raw Conducted PSD (dBm/30kHz)	-8.41	-2.11	-20.30
Duty Cycle Correction (dB)	0.35	0.35	0.37
15.247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
RSS-247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
Conducted PSD Result (dBm/30kHz)	-8.06	-1.76	-19.93

Table 15 - 802.11n / HT20 MCS7 / SISO / Core 1

Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
Conducted PSD Core 0 (dBm/30kHz)	-7.80	-2.80	-20.84
Conducted PSD Core 1 (dBm/30kHz)	-8.29	-2.36	-20.44
Duty Cycle Correction (dB)	0.35	0.35	0.37
15.247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
RSS-247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
Conducted PSD Result (dBm/30kHz)	-4.67	0.79	-17.26

Table 16 - 802.11n / HT20 MCS7 / MIMO CDD / Cores 0+1



Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
Raw Conducted PSD (dBm/30kHz)	-8.54	-2.59	-20.23
Duty Cycle Correction (dB)	0.40	0.40	0.42
15.247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
RSS-247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
Conducted PSD Result (dBm/30kHz)	-8.14	-2.19	-19.81

Table 17 - 802.11ax / HE20 MCS7x1 / SU / SISO / Core 1

Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
Raw Conducted PSD (dBm/30kHz)	-3.77	-5.06	-18.15
Duty Cycle Correction (dB)	0.37	0.38	0.38
15.247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
RSS-247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
Conducted PSD Result (dBm/30kHz)	-3.40	-4.68	-17.77

Table 18 - 802.11ax / HE20 MCS7x1 / RU 26-0 / SISO / Core 1

Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
Raw Conducted PSD (dBm/30kHz)	-3.81	-5.29	-17.68
Duty Cycle Correction (dB)	0.37	0.38	0.38
15.247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
RSS-247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
Conducted PSD Result (dBm/30kHz)	-3.44	-4.92	-17.31

Table 19 - 802.11ax / HE20 MCS7x1 / RU 26-8 / SISO / Core 1

Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
Raw Conducted PSD (dBm/30kHz)	-2.92	-3.97	-19.14
Duty Cycle Correction (dB)	0.39	0.40	0.40
15.247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
RSS-247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
Conducted PSD Result (dBm/30kHz)	-2.52	-3.57	-18.74

Table 20 - 802.11ax / HE20 MCS7x1 / RU 52-37 / SISO / Core 1



Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
Raw Conducted PSD (dBm/30kHz)	-3.66	-4.15	-19.22
Duty Cycle Correction (dB)	0.39	0.40	0.40
15.247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
RSS-247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
Conducted PSD Result (dBm/30kHz)	-3.27	-3.75	-18.82

Table 21 - 802.11ax / HE20 MCS7x1 / RU 52-40 / SISO / Core 1

Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
Raw Conducted PSD (dBm/30kHz)	-5.24	-4.24	-21.05
Duty Cycle Correction (dB)	0.21	0.21	0.21
15.247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
RSS-247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
Conducted PSD Result (dBm/30kHz)	-5.03	-4.03	-20.83

Table 22 - 802.11ax / HE20 MCS7x1 / RU 106-53 / SISO / Core 1

Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
Raw Conducted PSD (dBm/30kHz)	-5.26	-3.93	-20.79
Duty Cycle Correction (dB)	0.21	0.21	0.21
15.247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
RSS-247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
Conducted PSD Result (dBm/30kHz)	-5.05	-3.72	-20.58

Table 23 - 802.11ax / HE20 MCS7x1 / RU 106-54 / SISO / Core 1

Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
Conducted PSD Core 0 (dBm/30kHz)	-9.41	-2.81	-20.89
Conducted PSD Core 1 (dBm/30kHz)	-9.74	-2.86	-21.32
Duty Cycle Correction (dB)	0.40	0.40	0.41
15.247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
RSS-247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
Conducted PSD Result (dBm/30kHz)	-6.15	0.58	-17.67

Table 24 - 802.11ax / HE20 MCS7x1 / SU / MIMO CDD / Cores 0+1



Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
Conducted PSD Core 0 (dBm/30kHz)	-3.92	-5.56	-18.19
Conducted PSD Core 1 (dBm/30kHz)	-3.49	-4.89	-18.26
Duty Cycle Correction (dB)	0.37	0.38	0.38
15.247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
RSS-247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
Conducted PSD Result (dBm/30kHz)	-0.32	-1.82	-14.84

Table 25 - 802.11ax / HE20 MCS7x1 / RU 26-0 / MIMO CDD / Cores 0+1

Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
Conducted PSD Core 0 (dBm/30kHz)	-3.98	-5.42	-18.00
Conducted PSD Core 1 (dBm/30kHz)	-3.70	-5.27	-17.78
Duty Cycle Correction (dB)	0.37	0.38	0.38
15.247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
RSS-247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
Conducted PSD Result (dBm/30kHz)	-0.45	-1.95	-14.51

Table 26 - 802.11ax / HE20 MCS7x1 / RU 26-8 / MIMO CDD / Cores 0+1

Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
Conducted PSD Core 0 (dBm/30kHz)	-3.35	-4.53	-19.11
Conducted PSD Core 1 (dBm/30kHz)	-3.27	-4.25	-19.36
Duty Cycle Correction (dB)	0.39	0.40	0.40
15.247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
RSS-247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
Conducted PSD Result (dBm/30kHz)	0.10	-0.98	-15.82

Table 27 - 802.11ax / HE20 MCS7x1 / RU 52-37 / MIMO CDD / Cores 0+1

Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
Conducted PSD Core 0 (dBm/30kHz)	-3.01	-5.03	-19.21
Conducted PSD Core 1 (dBm/30kHz)	-3.47	-4.45	-19.27
Duty Cycle Correction (dB)	0.39	0.40	0.40
15.247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
RSS-247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
Conducted PSD Result (dBm/30kHz)	0.17	-1.32	-15.83

Table 28 - 802.11ax / HE20 MCS7x1 / RU 52-40 / MIMO CDD / Cores 0+1



Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
Conducted PSD Core 0 (dBm/30kHz)	-8.13	-4.72	-21.26
Conducted PSD Core 1 (dBm/30kHz)	-7.80	-4.04	-20.87
Duty Cycle Correction (dB)	0.21	0.21	0.21
15.247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
RSS-247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
Conducted PSD Result (dBm/30kHz)	-4.75	-1.15	-17.83

Table 29 - 802.11ax / HE20 MCS7x1 / RU 106-53 / MIMO CDD / Cores 0+1

Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
Conducted PSD Core 0 (dBm/30kHz)	-7.91	-4.37	-20.43
Conducted PSD Core 1 (dBm/30kHz)	-7.81	-3.52	-20.28
Duty Cycle Correction (dB)	0.21	0.21	0.21
15.247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
RSS-247 Conducted PSD Limit (dBm/3kHz)	8.00	8.00	8.00
Conducted PSD Result (dBm/30kHz)	-4.64	-0.71	-17.13

Table 30 - 802.11ax / HE20 MCS7x1 / RU 106-54 / MIMO CDD / Cores 0+1

FCC 47 CFR Part 15, Limit Clause 15.247 (e)

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

ISED RSS-247, Limit Clause 5.2(b)

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission



2.2.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Rubidium Standard	Rohde & Schwarz	XSRM	1316	6	17-May-2021
Multimeter	Iso-tech	IDM101	2421	12	30-Oct-2021
Hygrometer	Rotronic	I-1000	3220	12	16-Oct-2021
1800-6000 MHz Power Splitter	Mini-Circuits	ZN2PD-63-S+	4055	-	O/P Mon
1 Metre SMA Cable	Rhophase	3PS-1801A-1000-3PS	4099	12	22-Jun-2021
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	17-May-2021
AC Programmable Power Supply	iTech	IT7324	5227	-	O/P Mon
Cable 2.92m	Junkosha	MWX241/B	5411	12	22-Jun-2021
3.5 mm 1m Cable	Junkosha	MWX221-01000DMS	5417	12	22-Jun-2021
3.5 mm 1m Cable	Junkosha	MWX221-01000DMS	5418	12	22-Jun-2021
3.5 mm 2m Cable	Junkosha	MWX221-02000DMS	5430	12	22-Jun-2021
Signal Analyzer	Keysight Technologies	PXA N9030B	5432	12	08-Dec-2021
Attenuator 5W 10dB DC-18GHz	Aaren	AT40A-4041-D18-10	5487	12	14-Apr-2021
MXA Signal Analyser	Keysight Technologies	N9020B	5529	24	04-Mar-2022
Attenuator 2W 10dB DC-10GHz	Telegartner	J01156A0031	5575	-	O/P Mon
Attenuator 2W 10dB DC-10GHz	Telegartner	J01156A0031	5579	-	O/P Mon
Attenuator 2W 10dB DC-10GHz	Telegartner	J01156A0031	5580	-	O/P Mon
Attenuator 2W 10dB DC-10GHz	Telegartner	J01156A0031	5581	-	O/P Mon
2-Way Power Divider (2-8 GHz)	Aaren	AT30A-TE0208-2-AF	5685	12	18-Dec-2021
2-Way Power Divider (2-8 GHz)	Aaren	AT30A-TE0208-2-AF	5687	12	18-Dec-2021

Table 31

O/P Mon – Output Monitored using calibrated equipment



2.3 Emission Bandwidth

2.3.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (a)(2)
ISED RSS-247, Clause 5.2
ISED RSS-GEN, Clause 6.7

2.3.2 Equipment Under Test and Modification State

A2439, S/N: C02DM0070FTP - Modification State 0

2.3.3 Date of Test

18-December-2020 to 13-January-2021

2.3.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 11.8.2

For modes of operation using multiple cores, measurements were made on each core but only the worst case results are reported. Worst case was considered as the narrowest results for 6 dB bandwidth and the widest result for 26 dB bandwidth and 99 % occupied bandwidth.

2.3.5 Environmental Conditions

Ambient Temperature	20.9 - 26.3 °C
Relative Humidity	22.4 - 50.1 %



2.3.6 Test Results

2.4 GHz WLAN

Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
6 dB Bandwidth (MHz)	8.160	8.160	8.160
99% Bandwidth (MHz)	12.896	12.961	12.851

Table 32 - 802.11b / 1 Mbps / SISO / Core 1

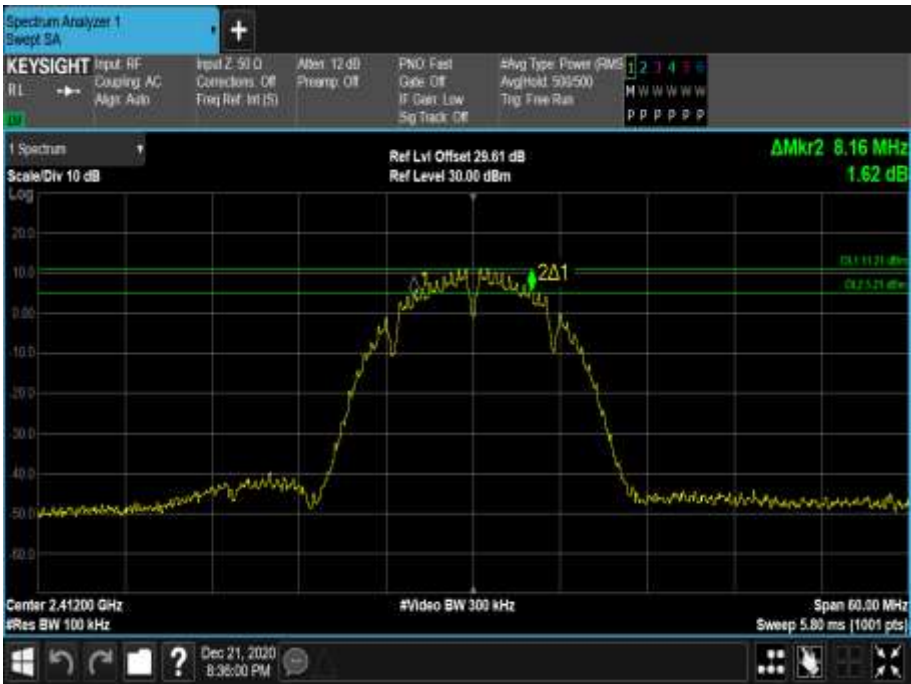


Figure 1 - 2412 MHz - 6 dB DTS Bandwidth

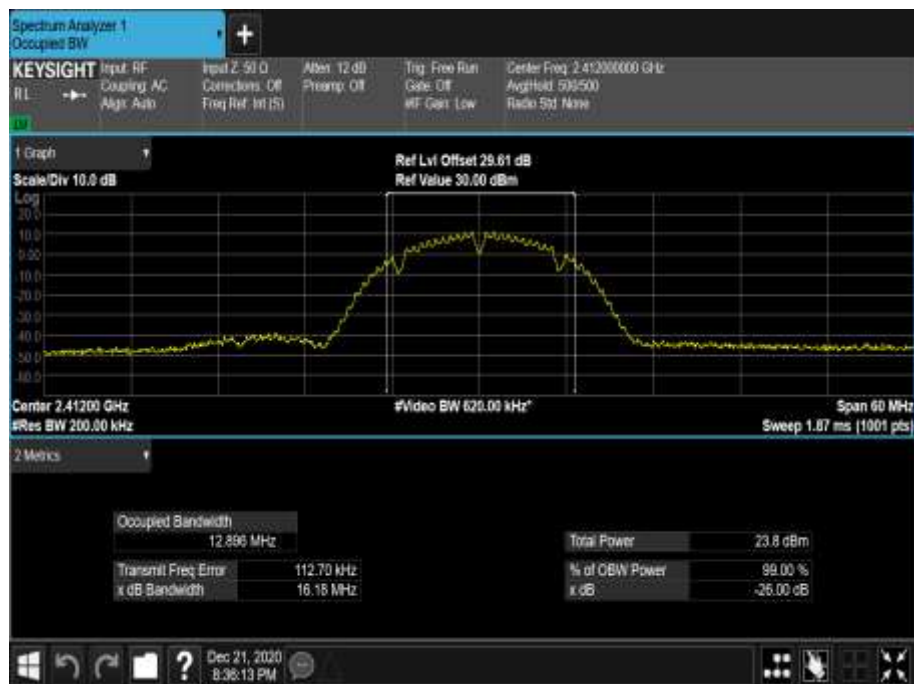


Figure 2 - 2412 MHz - 99% Occupied Bandwidth

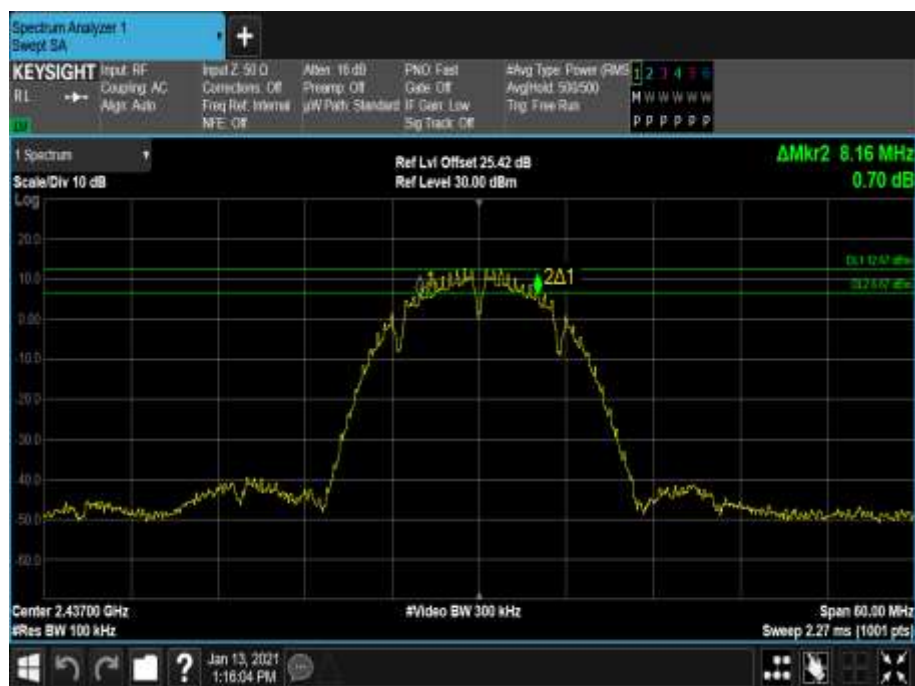


Figure 3 - 2437 MHz - 6 dB DTS Bandwidth

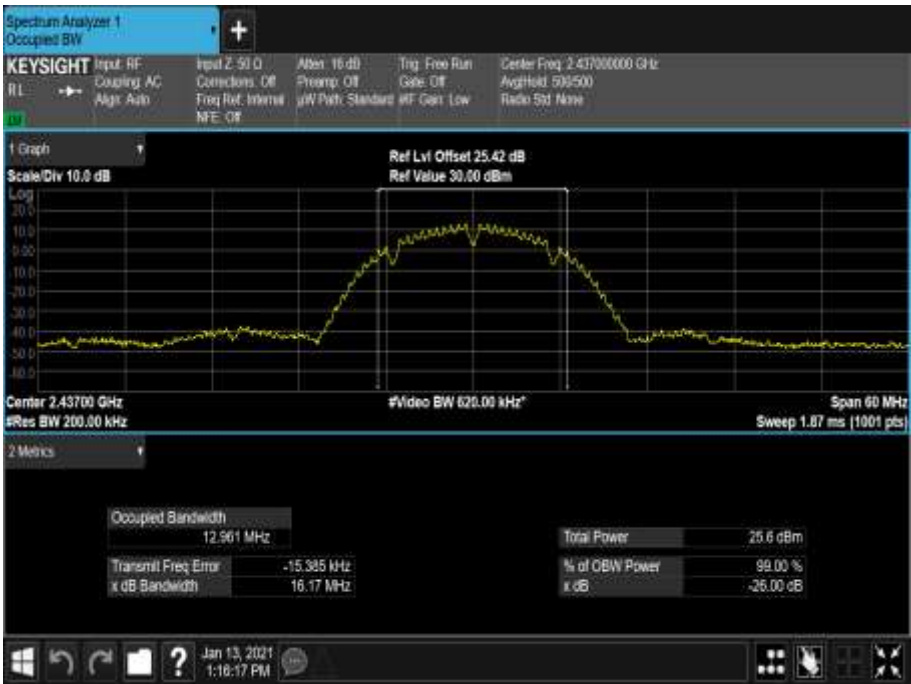


Figure 4 - 2437 MHz - 99% Occupied Bandwidth

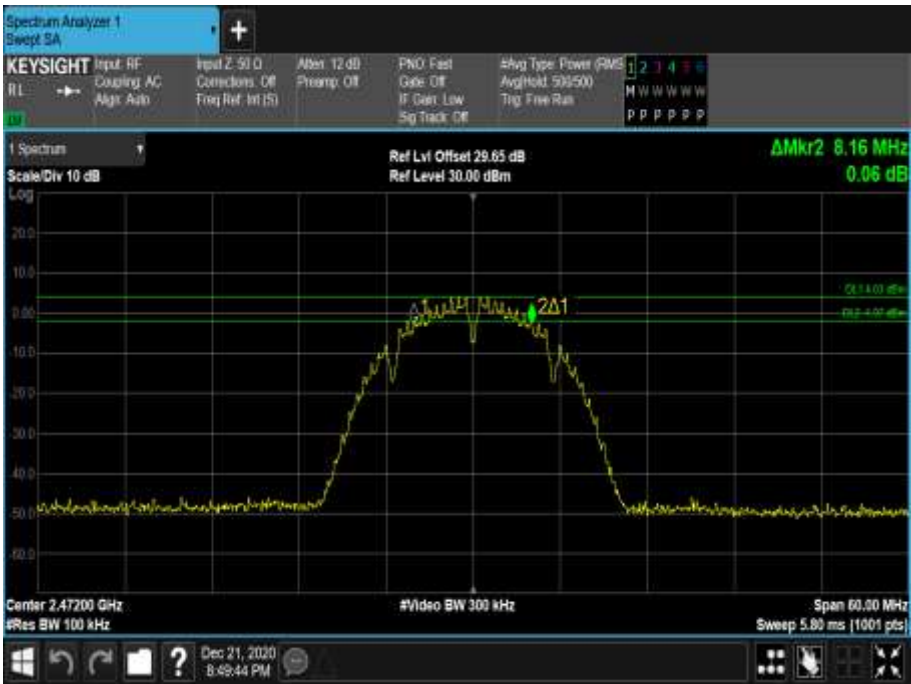


Figure 5 - 2472 MHz - 6 dB DTS Bandwidth



Figure 6 - 2472 MHz - 99% Occupied Bandwidth

Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
6 dB Bandwidth (MHz)	14.040	15.240	15.240
99% Bandwidth (MHz)	16.300	16.336	16.256

Table 33 - 802.11g / 6 Mbps / SISO / Core 1



Figure 7 - 2412 MHz - 6 dB DTS Bandwidth

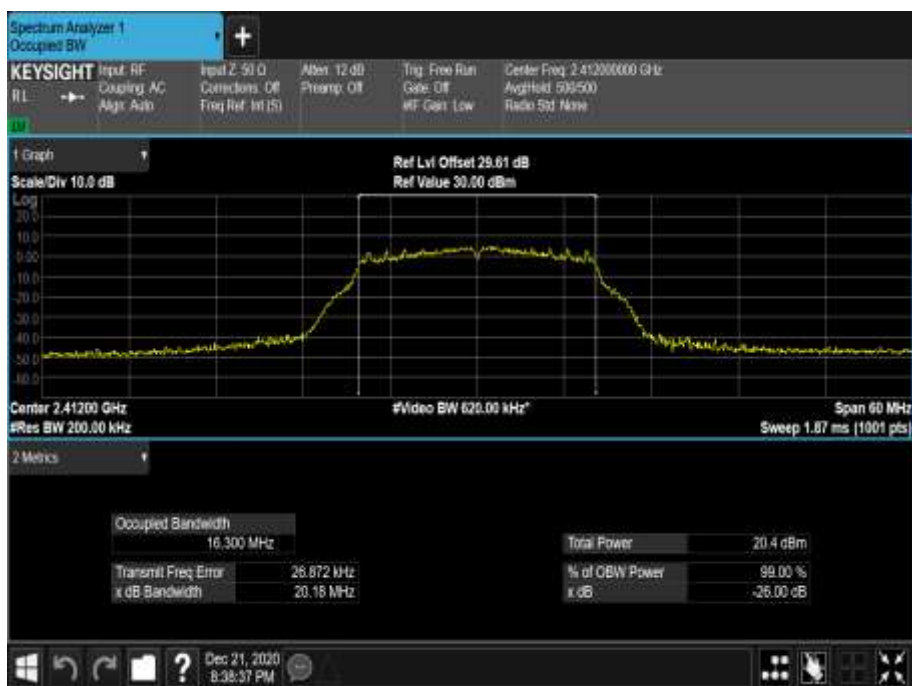


Figure 8 - 2412 MHz - 99% Occupied Bandwidth

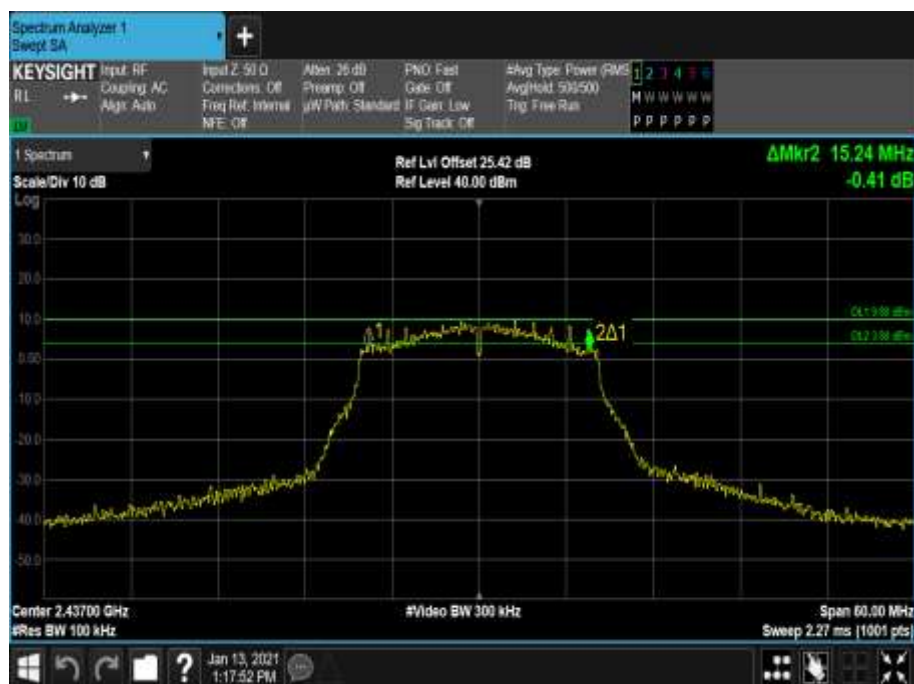


Figure 9 - 2437 MHz - 6 dB DTS Bandwidth

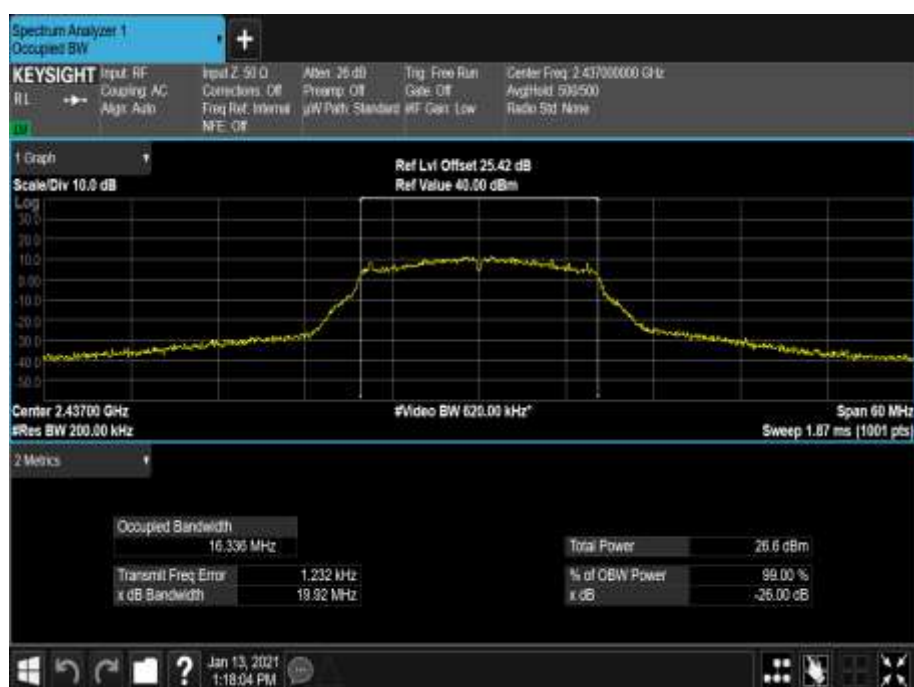


Figure 10 - 2437 MHz - 99% Occupied Bandwidth

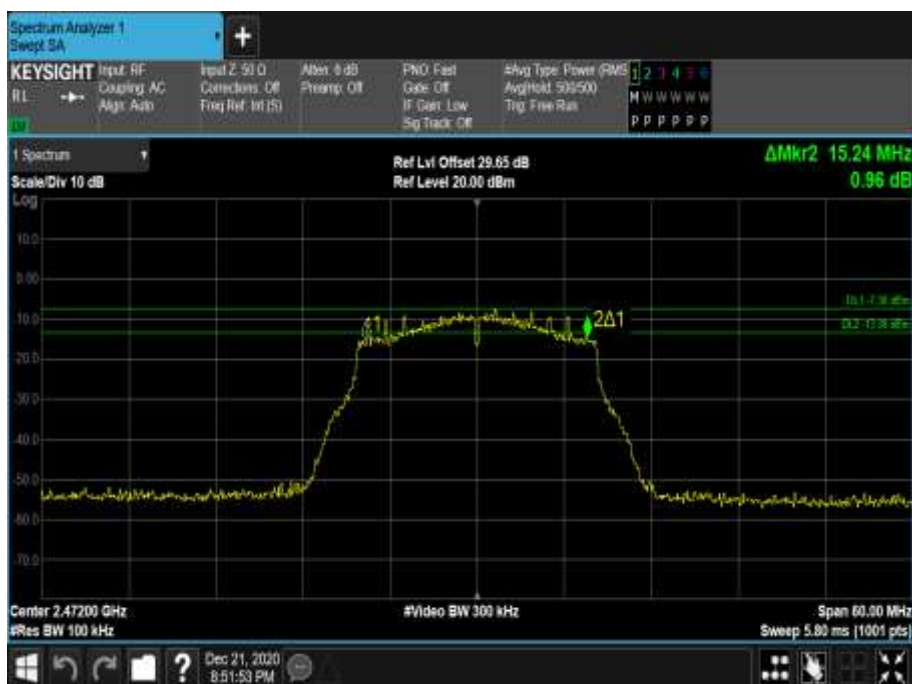


Figure 11 - 2472 MHz - 6 dB DTS Bandwidth

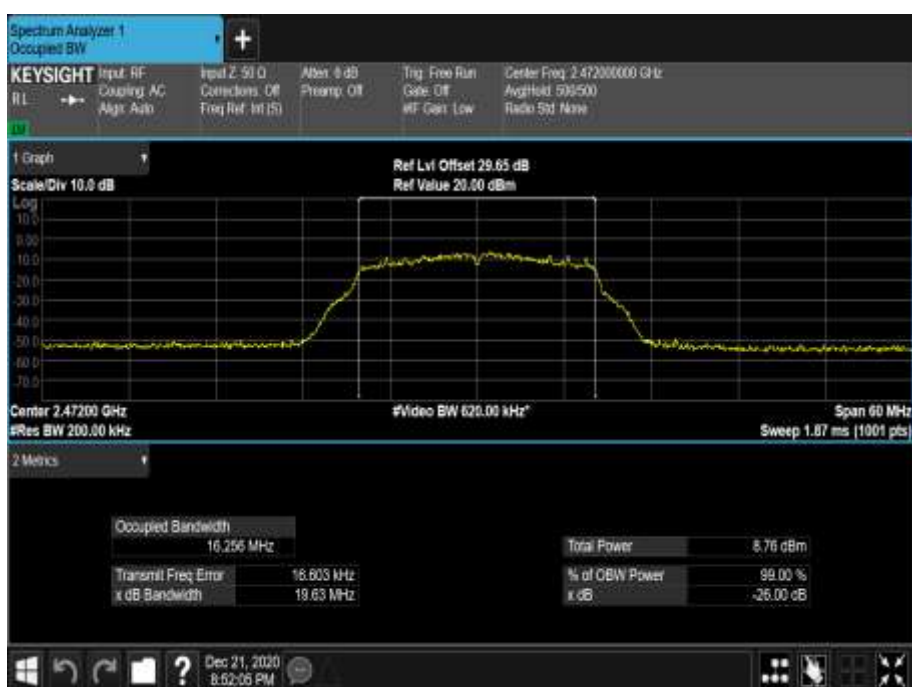


Figure 12 - 2472 MHz - 99% Occupied Bandwidth



Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
6 dB Bandwidth (MHz)	17.760	17.760	17.400
99% Bandwidth (MHz)	17.698	17.738	17.640

Table 34 - 802.11n / HT20 MCS7 / SISO / Core 1

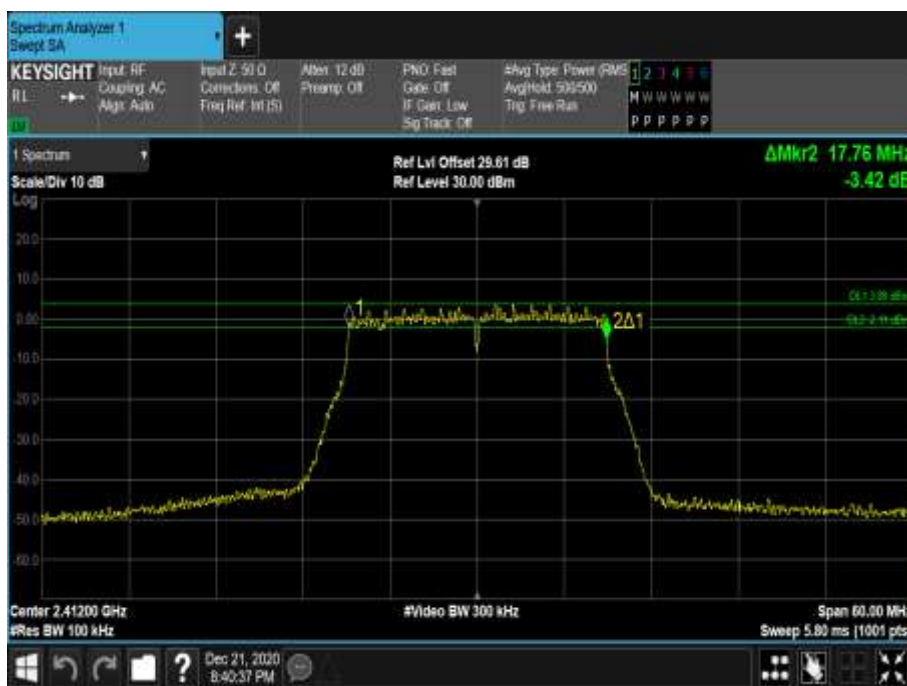


Figure 13 - 2412 MHz - 6 dB DTS Bandwidth



Figure 14 - 2412 MHz - 99% Occupied Bandwidth

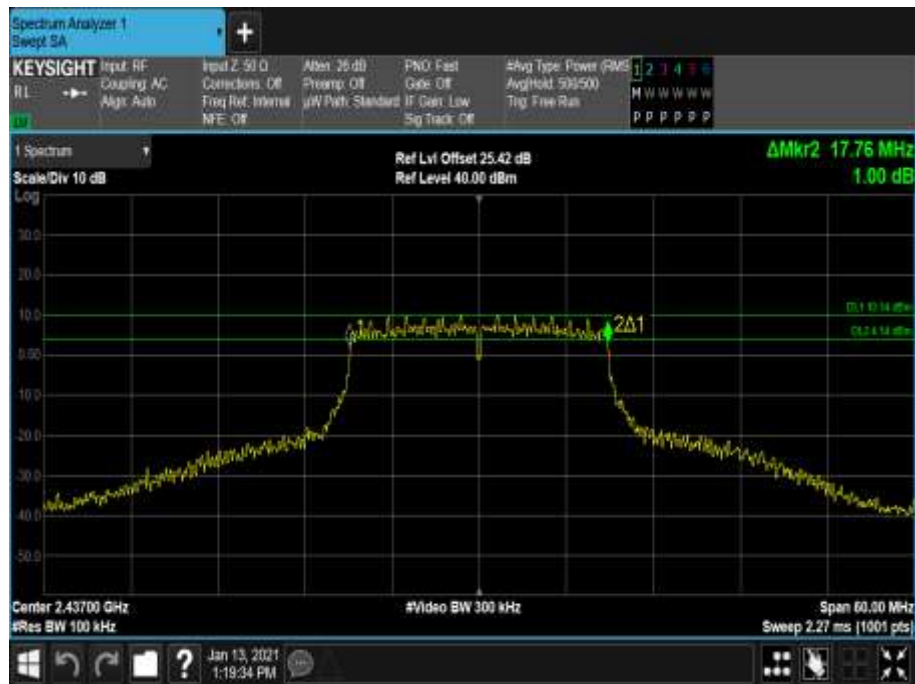


Figure 15 - 2437 MHz - 6 dB DTS Bandwidth

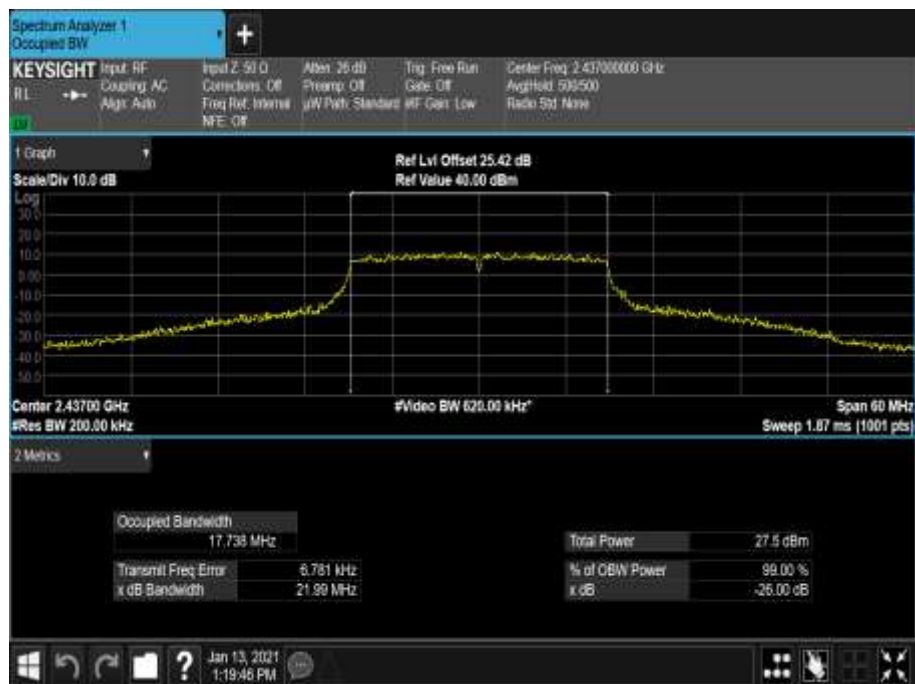


Figure 16 - 2437 MHz - 99% Occupied Bandwidth



Figure 17 - 2472 MHz - 6 dB DTS Bandwidth



Figure 18 - 2472 MHz - 99% Occupied Bandwidth



Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
6 dB Bandwidth (MHz)	17.700	17.760	17.700
99% Bandwidth (MHz)	17.708	17.751	17.649

Table 35 - 802.11n / HT20 MCS7 / MIMO CDD / Cores 0+1

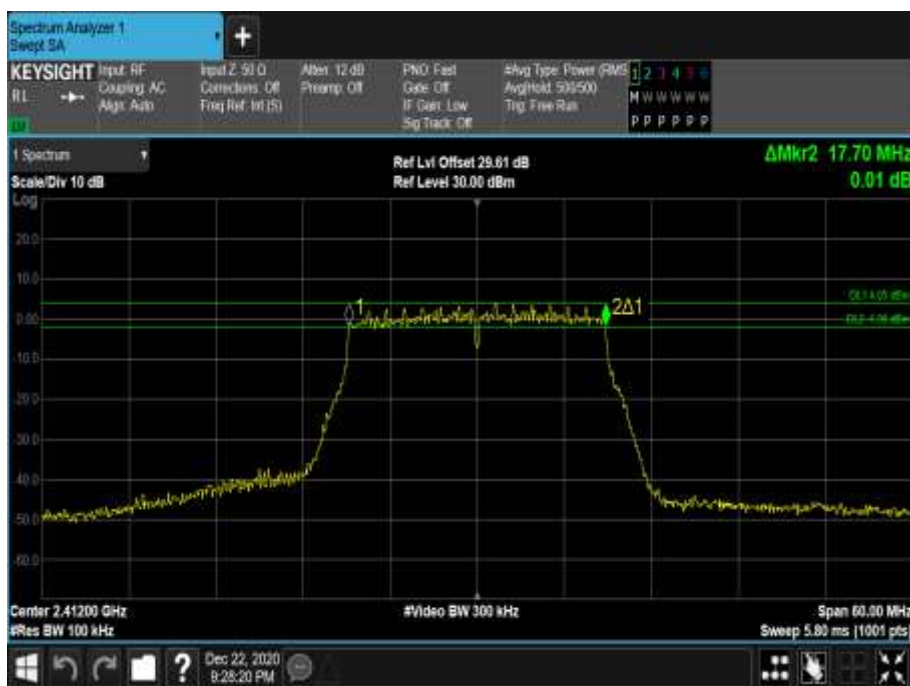


Figure 19 - 2412 MHz - 6 dB DTS Bandwidth



Figure 20 - 2412 MHz - 99% Occupied Bandwidth

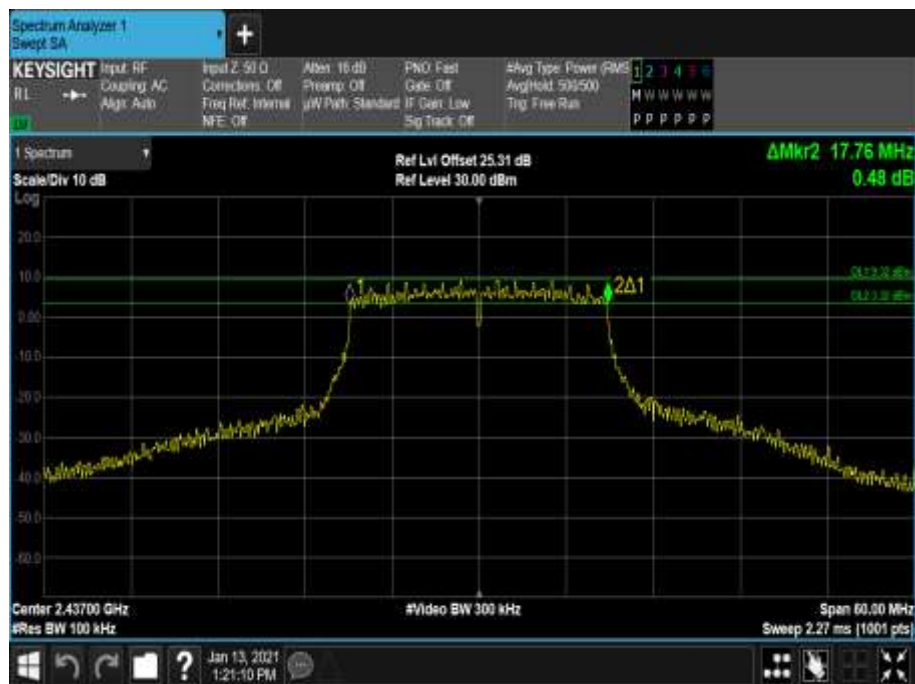


Figure 21 - 2437 MHz - 6 dB DTS Bandwidth

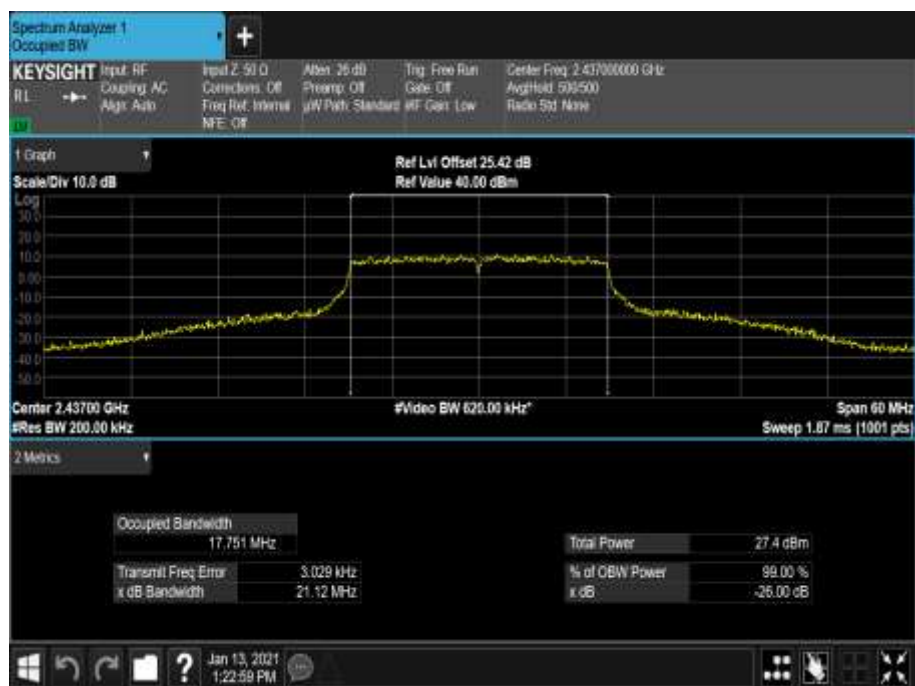


Figure 22 - 2437 MHz - 99% Occupied Bandwidth



Figure 23 - 2472 MHz - 6 dB DTS Bandwidth



Figure 24 - 2472 MHz - 99% Occupied Bandwidth

Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
6 dB Bandwidth (MHz)	19.140	19.080	18.840
99% Bandwidth (MHz)	18.934	18.949	18.868

Table 36 - 802.11ax / HE20 MCS7x1 / SU / SISO / Core 1

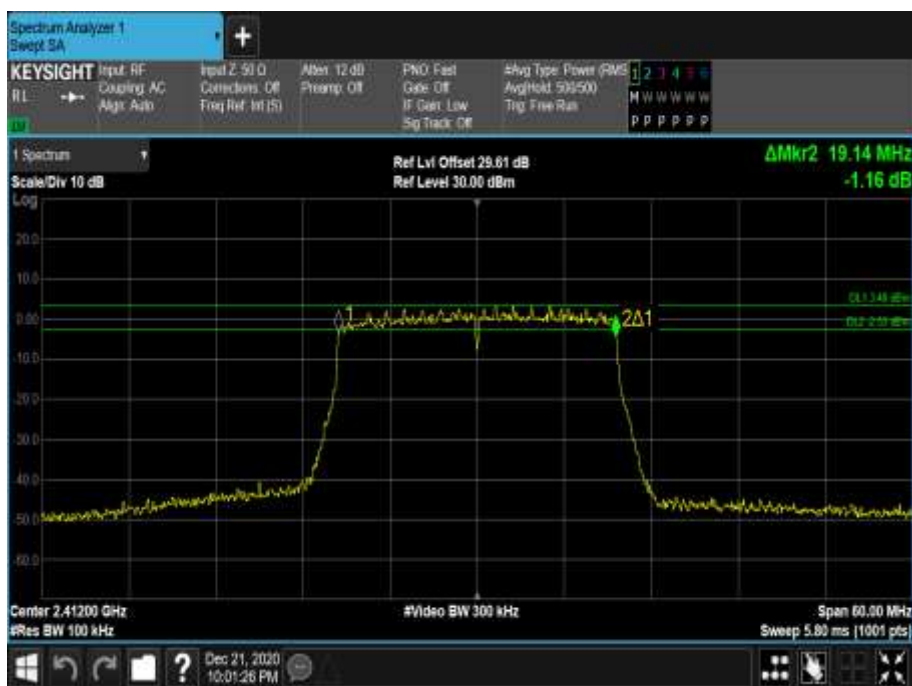


Figure 25 - 2412 MHz - 6 dB DTS Bandwidth

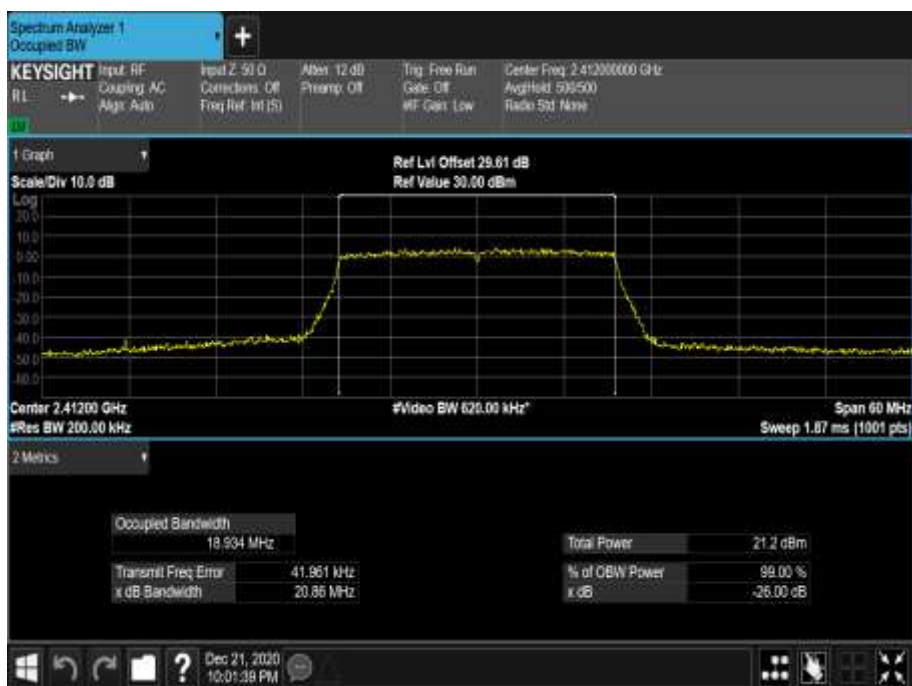


Figure 26 - 2412 MHz - 99% Occupied Bandwidth

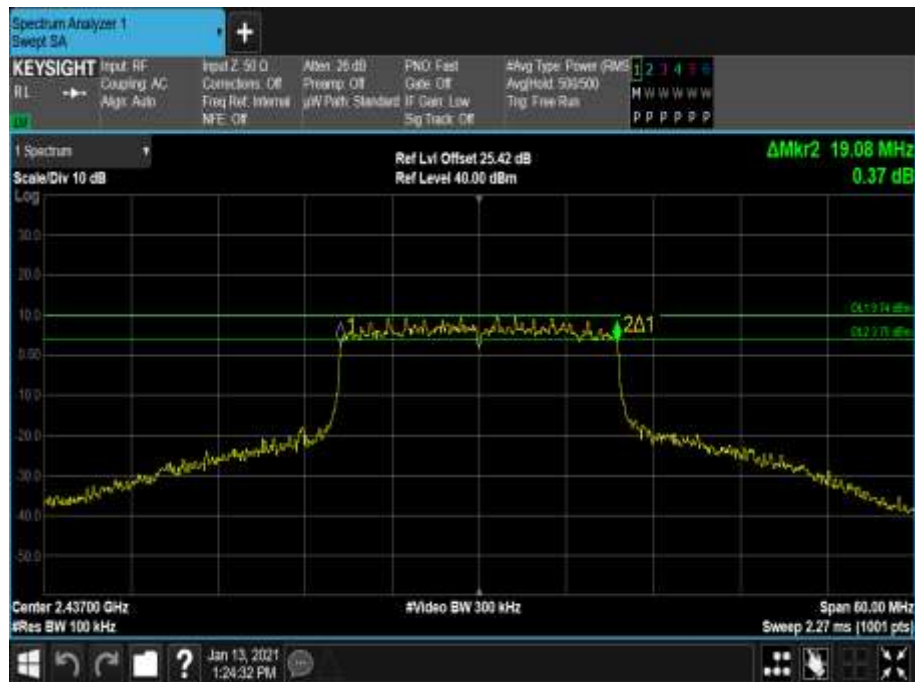


Figure 27 - 2437 MHz - 6 dB DTS Bandwidth

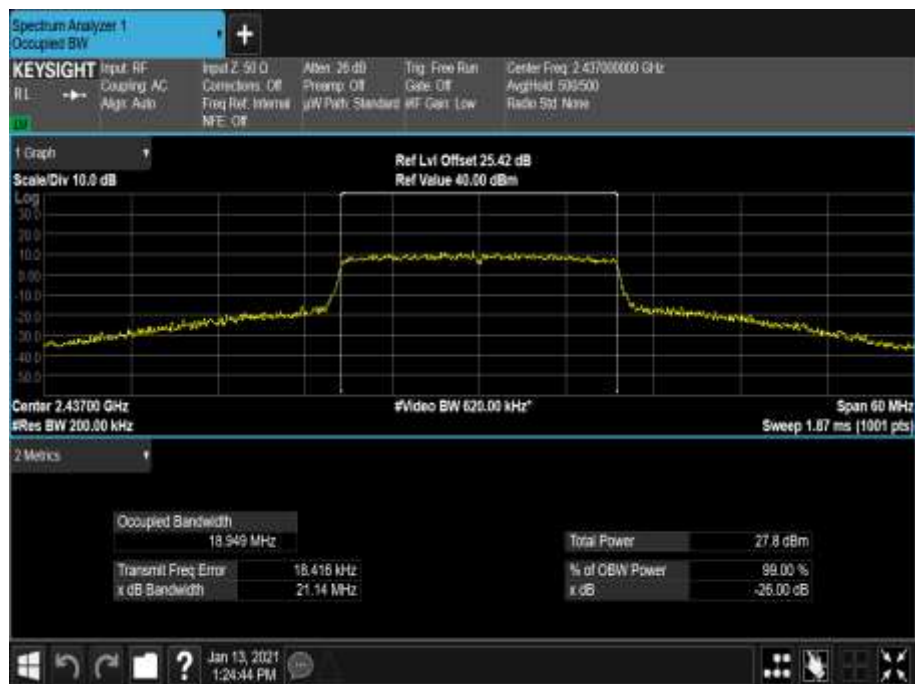


Figure 28 - 2437 MHz - 99% Occupied Bandwidth



Figure 29 - 2472 MHz - 6 dB DTS Bandwidth



Figure 30 - 2472 MHz - 99% Occupied Bandwidth

Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
6 dB Bandwidth (MHz)	10.980	2.160	2.100
99% Bandwidth (MHz)	18.303	18.210	18.190

Table 37 - 802.11ax / HE20 MCS7x1 / RU 26-0 / SISO / Core 1

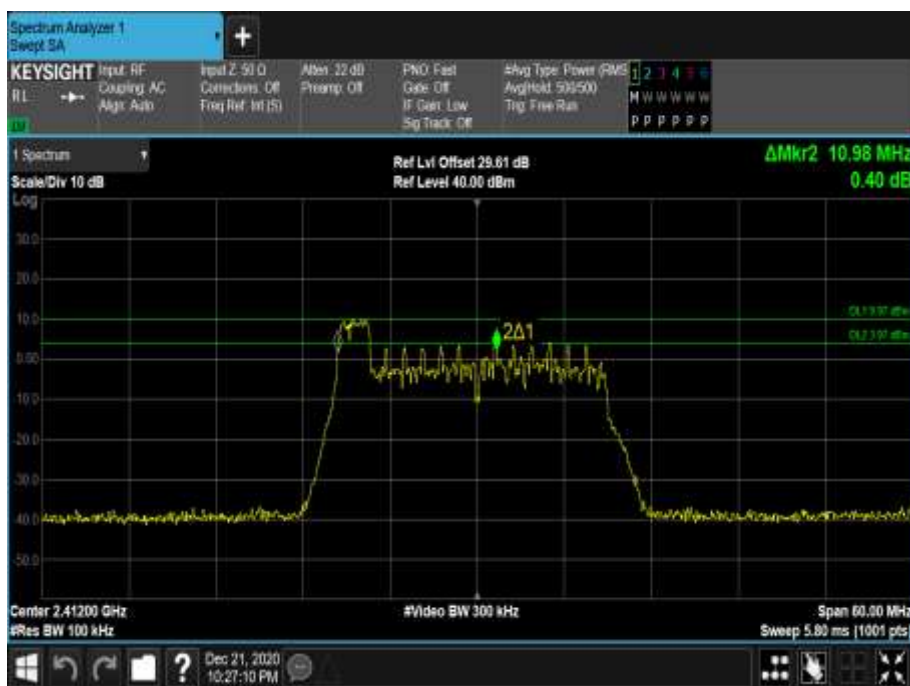


Figure 31 - 2412 MHz - 6 dB DTS Bandwidth



Figure 32 - 2412 MHz - 99% Occupied Bandwidth



Figure 33 - 2437 MHz - 6 dB DTS Bandwidth



Figure 34 - 2437 MHz - 99% Occupied Bandwidth



Figure 35 - 2472 MHz - 6 dB DTS Bandwidth



Figure 36 - 2472 MHz - 99% Occupied Bandwidth



Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
6 dB Bandwidth (MHz)	2.160	10.920	8.340
99% Bandwidth (MHz)	18.403	18.433	18.425

Table 38 - 802.11ax / HE20 MCS7x1 / RU 26-8 / SISO / Core 1

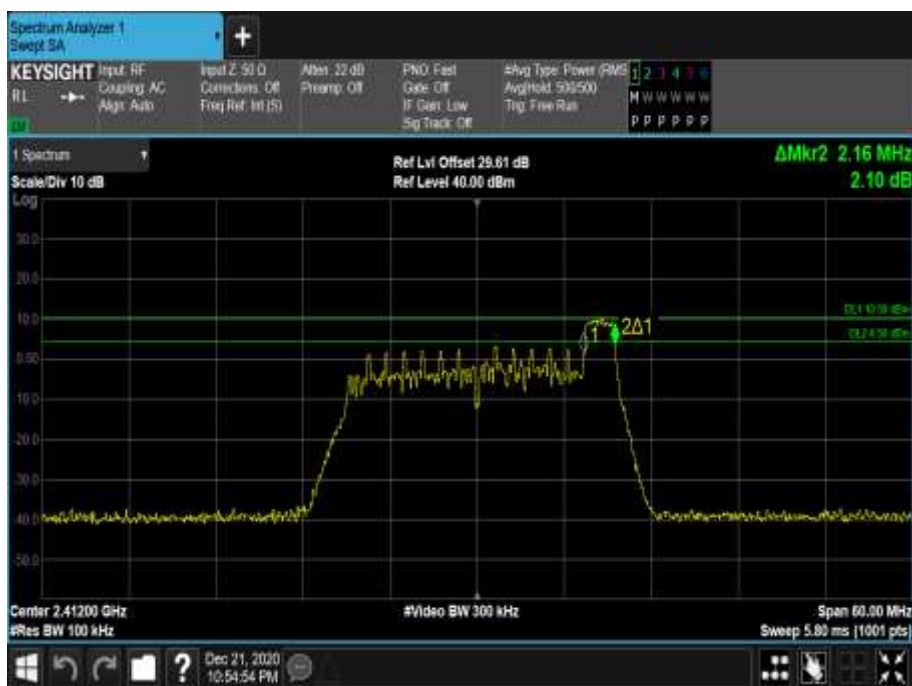


Figure 37 - 2412 MHz - 6 dB DTS Bandwidth



Figure 38 - 2412 MHz - 99% Occupied Bandwidth

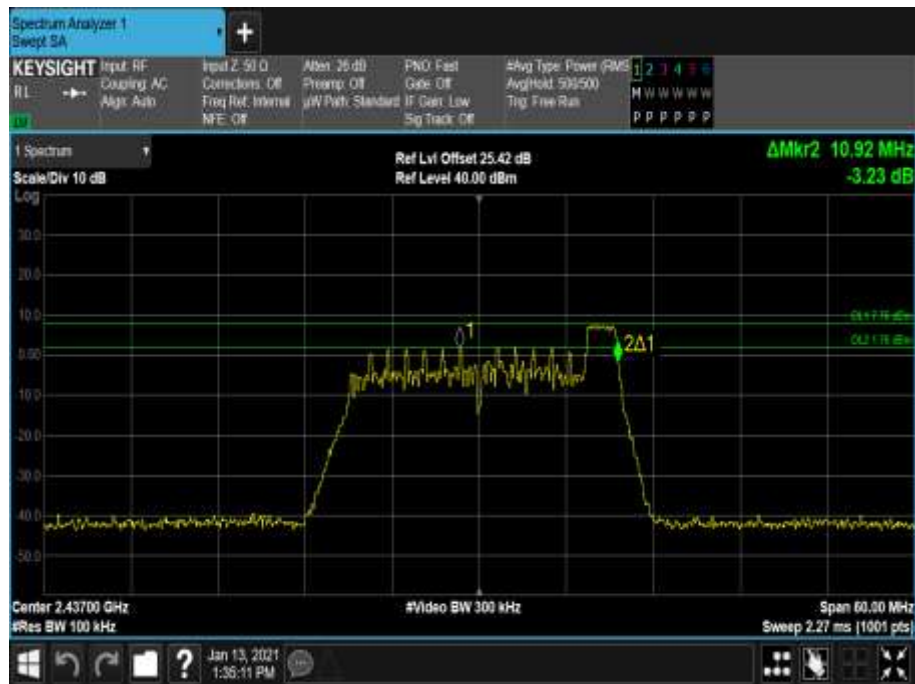


Figure 39 - 2437 MHz - 6 dB DTS Bandwidth



Figure 40 - 2437 MHz - 99% Occupied Bandwidth



Figure 41 - 2472 MHz - 6 dB DTS Bandwidth



Figure 42 - 2472 MHz - 99% Occupied Bandwidth



Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
6 dB Bandwidth (MHz)	18.960	18.960	18.780
99% Bandwidth (MHz)	18.966	18.963	18.870

Table 39 - 802.11ax / HE20 MCS7x1 / SU / MIMO CDD / Cores 0+1

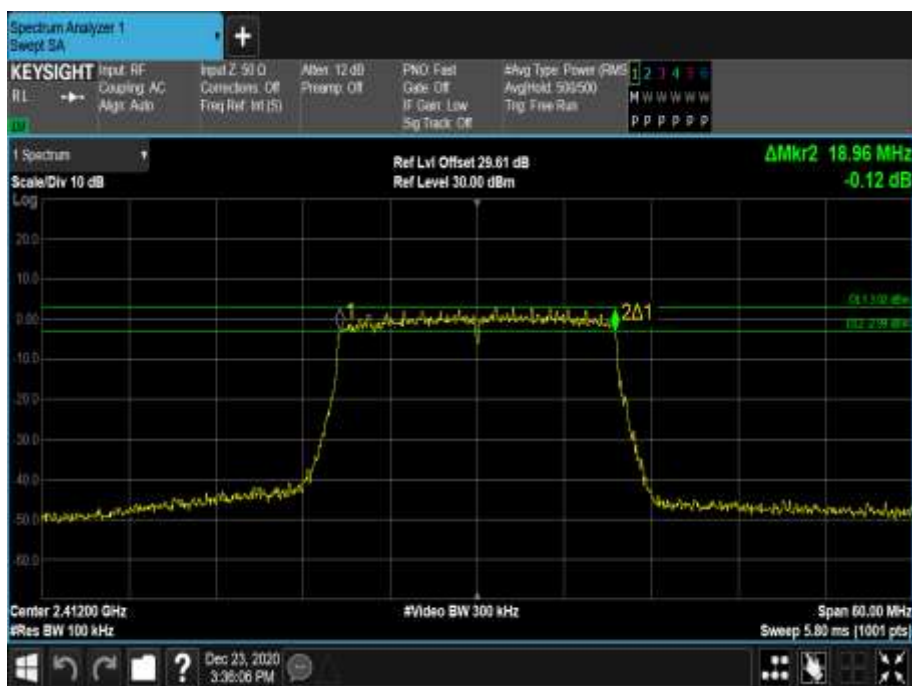


Figure 43 - 2412 MHz - 6 dB DTS Bandwidth



Figure 44 - 2412 MHz - 99% Occupied Bandwidth



Figure 45 - 2437 MHz - 6 dB DTS Bandwidth

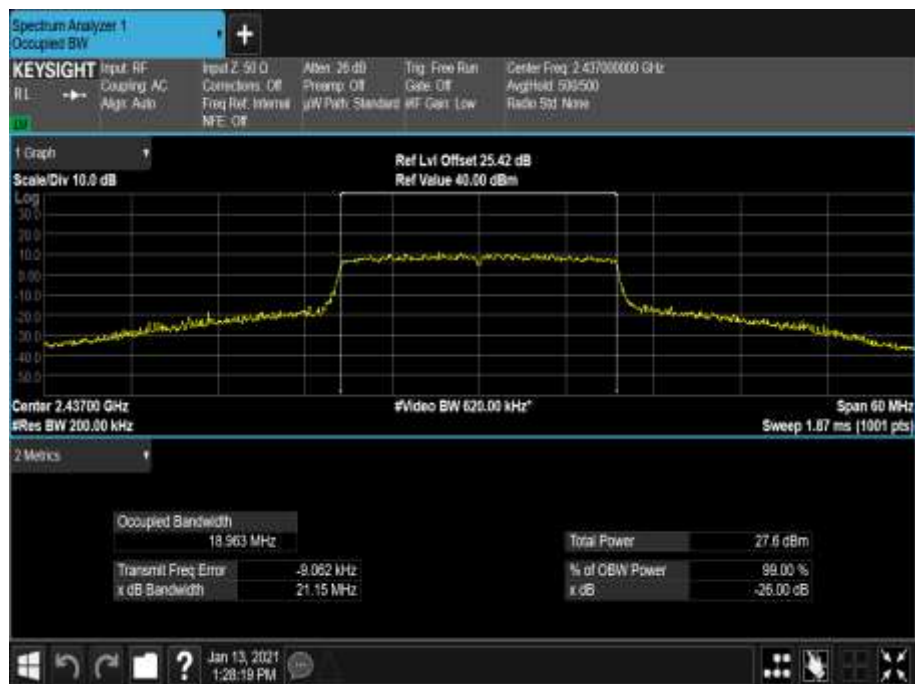


Figure 46 - 2437 MHz - 99% Occupied Bandwidth



Figure 47 - 2472 MHz - 6 dB DTS Bandwidth



Figure 48 - 2472 MHz - 99% Occupied Bandwidth



Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
6 dB Bandwidth (MHz)	2.160	2.160	2.160
99% Bandwidth (MHz)	18.297	18.207	18.203

Table 40 - 802.11ax / HE20 MCS7x1 / RU 26-0 / MIMO CDD / Cores 0+1

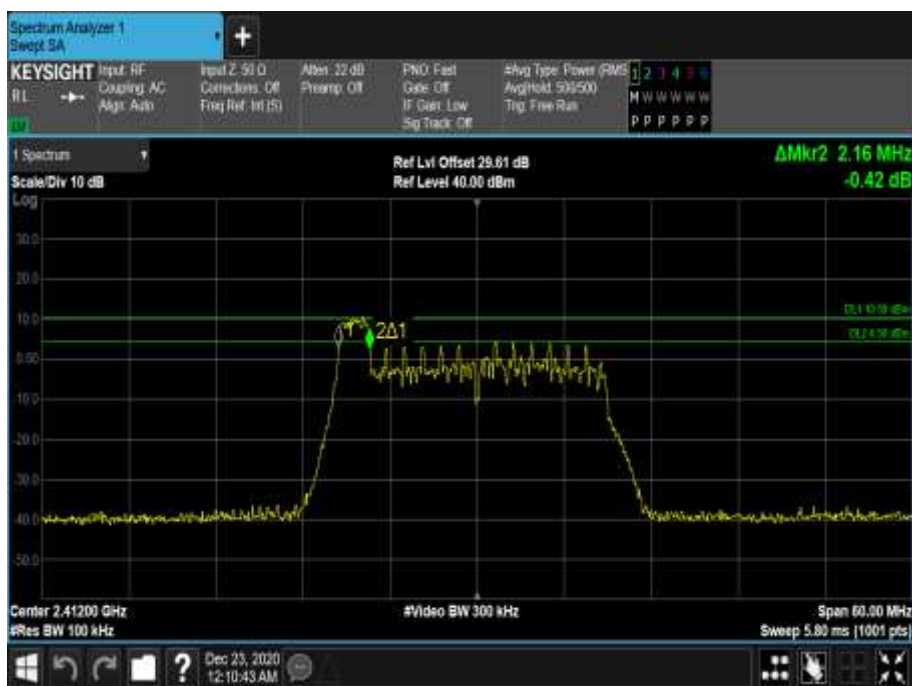


Figure 49 - 2412 MHz - 6 dB DTS Bandwidth



Figure 50 - 2412 MHz - 99% Occupied Bandwidth



Figure 51 - 2437 MHz - 6 dB DTS Bandwidth



Figure 52 - 2437 MHz - 99% Occupied Bandwidth



Figure 53 - 2472 MHz - 6 dB DTS Bandwidth



Figure 54 - 2472 MHz - 99% Occupied Bandwidth



Channel	Bottom	Middle	Top
Frequency (MHz)	2412	2437	2472
6 dB Bandwidth (MHz)	2.160	2.160	8.340
99% Bandwidth (MHz)	18.326	18.376	18.451

Table 41 - 802.11ax / HE20 MCS7x1 / RU 26-8 / MIMO CDD / Cores 0+1



Figure 55 - 2412 MHz - 6 dB DTS Bandwidth



Figure 56 - 2412 MHz - 99% Occupied Bandwidth



Figure 57 - 2437 MHz - 6 dB DTS Bandwidth



Figure 58 - 2437 MHz - 99% Occupied Bandwidth

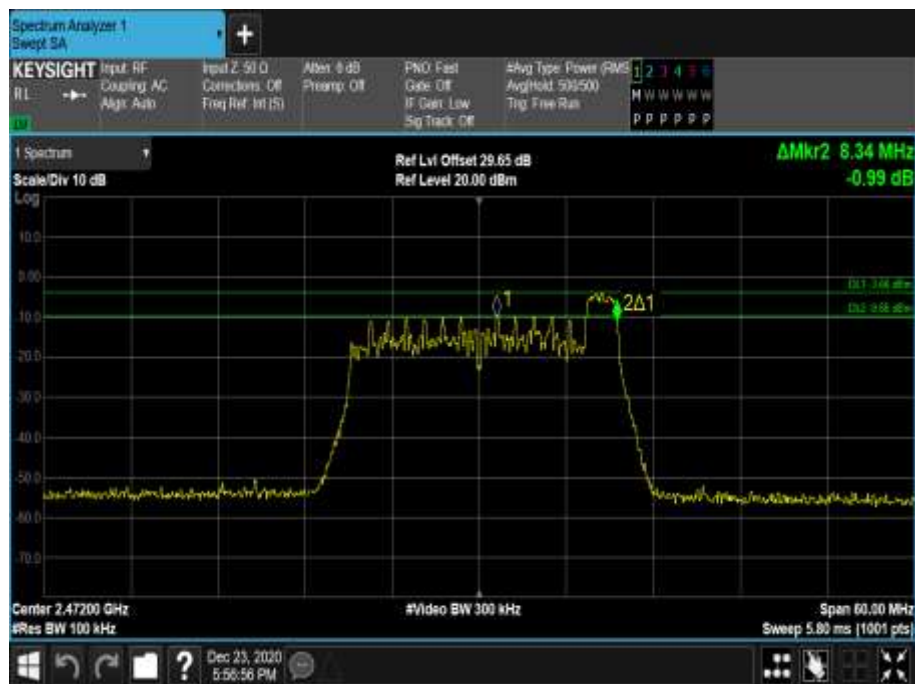


Figure 59 - 2472 MHz - 6 dB DTS Bandwidth



Figure 60 - 2472 MHz - 99% Occupied Bandwidth

FCC 47 CFR Part 15, Limit Clause 15.247(a)(2) and ISEDC RSS-247, Clause 5.2(a)

The minimum 6 dB Bandwidth shall be at least 500 kHz.



2.3.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Rubidium Standard	Rohde & Schwarz	XSRM	1316	6	17-May-2021
Multimeter	Iso-tech	IDM101	2421	12	30-Oct-2021
Hygrometer	Rotronic	I-1000	3220	12	16-Oct-2021
1800-6000 MHz Power Splitter	Mini-Circuits	ZN2PD-63-S+	4055	-	O/P Mon
1 Metre SMA Cable	Rhophase	3PS-1801A-1000-3PS	4099	12	22-Jun-2021
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	17-May-2021
AC Programmable Power Supply	iTech	IT7324	5227	-	O/P Mon
Cable 2.92m	Junkosha	MWX241/B	5411	12	22-Jun-2021
3.5 mm 1m Cable	Junkosha	MWX221-01000DMS	5417	12	22-Jun-2021
3.5 mm 1m Cable	Junkosha	MWX221-01000DMS	5418	12	22-Jun-2021
3.5 mm 2m Cable	Junkosha	MWX221-02000DMS	5430	12	22-Jun-2021
Signal Analyzer	Keysight Technologies	PXA N9030B	5432	12	08-Dec-2021
Attenuator 5W 10dB DC-18GHz	Aaren	AT40A-4041-D18-10	5487	12	14-Apr-2021
MXA Signal Analyser	Keysight Technologies	N9020B	5529	24	04-Mar-2022
Attenuator 2W 10dB DC-10GHz	Telegartner	J01156A0031	5575	-	O/P Mon
Attenuator 2W 10dB DC-10GHz	Telegartner	J01156A0031	5579	-	O/P Mon
Attenuator 2W 10dB DC-10GHz	Telegartner	J01156A0031	5580	-	O/P Mon
Attenuator 2W 10dB DC-10GHz	Telegartner	J01156A0031	5581	-	O/P Mon
2-Way Power Divider (2-8 GHz)	Aaren	AT30A-TE0208-2-AF	5685	12	18-Dec-2021
2-Way Power Divider (2-8 GHz)	Aaren	AT30A-TE0208-2-AF	5687	12	18-Dec-2021

Table 42

O/P Mon – Output Monitored using calibrated equipment



2.4 Authorised Band Edges

2.4.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (d)
ISED RSS-247, Clause 5.5

2.4.2 Equipment Under Test and Modification State

A2439, S/N: C02DM00M0FTN - Modification State 0

2.4.3 Date of Test

10-November-2020 to 10-January-2021

2.4.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 6.10.4.

Authorised band edge measurements were performed with the device operating in SISO and MIMO configurations across the various modes supported by the device.

Since compliance with the power limits in section 2.1 was shown by RMS averaging across all symbols in the signaling alphabet, a 30 dBc limit rather than 20 dBc limit was applied in accordance with FCC 47 CFR Part 15.247(d) and RSS-247 clause 5.5.

The measurements displayed within this report, have in some cases been limited to those modes which have been shown to be worst case. Further measurements are held on file by TÜV SÜD and are available if required.

2.4.5 Environmental Conditions

Ambient Temperature	19.3 - 22.6 °C
Relative Humidity	34.9 - 63.9 %

2.4.6 Test Results

2.4 GHz WLAN

Mode	Data Rate /MCS	Resource size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
802.11b, Core 1	1 Mbps	-	-	2412	2400	-51.81
802.11g, Core 1	6 Mbps	-	-	2412	2400	-45.80
802.11n HT20, Core 1	MCS7	-	-	2412	2400	-41.70
802.11ax HE20, Core 1	MCS7x1	SU	-	2412	2400	-42.12
802.11ax HE20, Core 1	MCS7x1	26	0	2412	2400	-49.63

Table 43 - SISO Authorised Band Edge Results



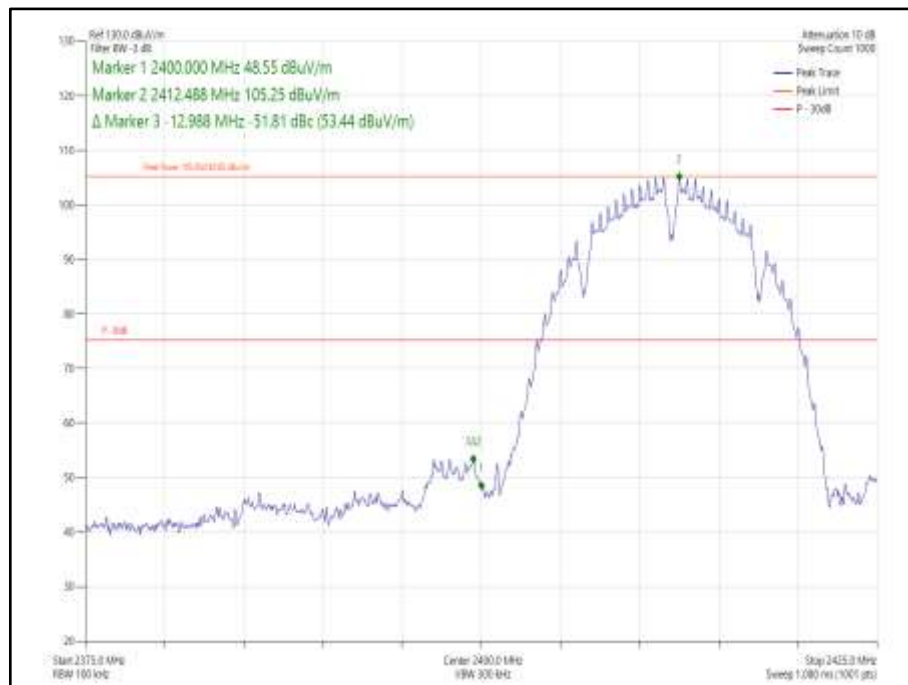



Figure 61 - 802.11b, Core 1 - 2412 MHz
Band Edge Frequency 2400 MHz

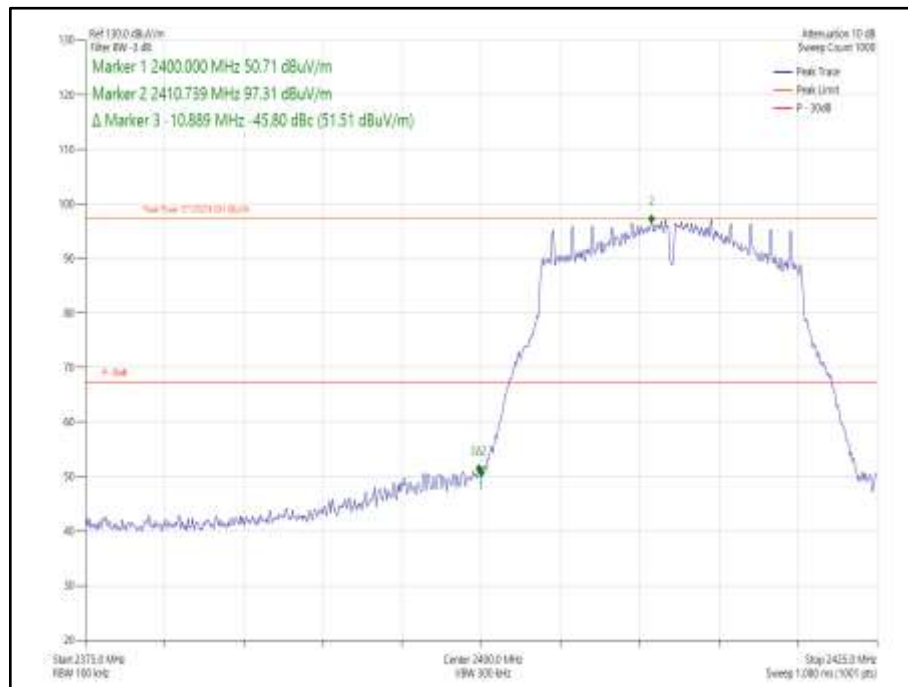


**Figure 62- 802.11g, Core 1 - 2412 MHz
Band Edge Frequency 2400 MHz**

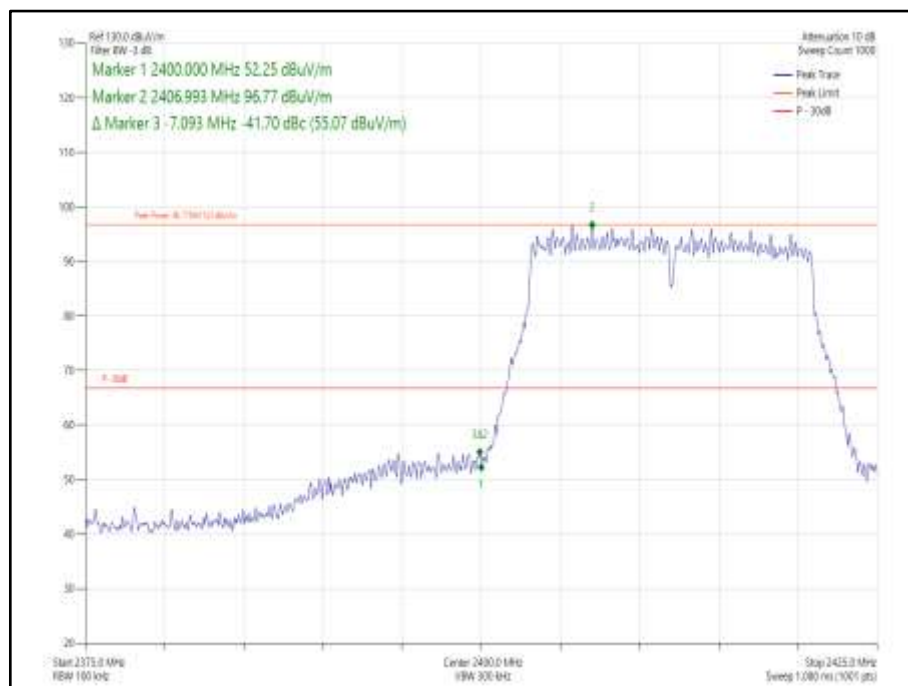

**Figure 63- 802.11n HT20, Core 1 - 2412 MHz
Band Edge Frequency 2400 MHz**

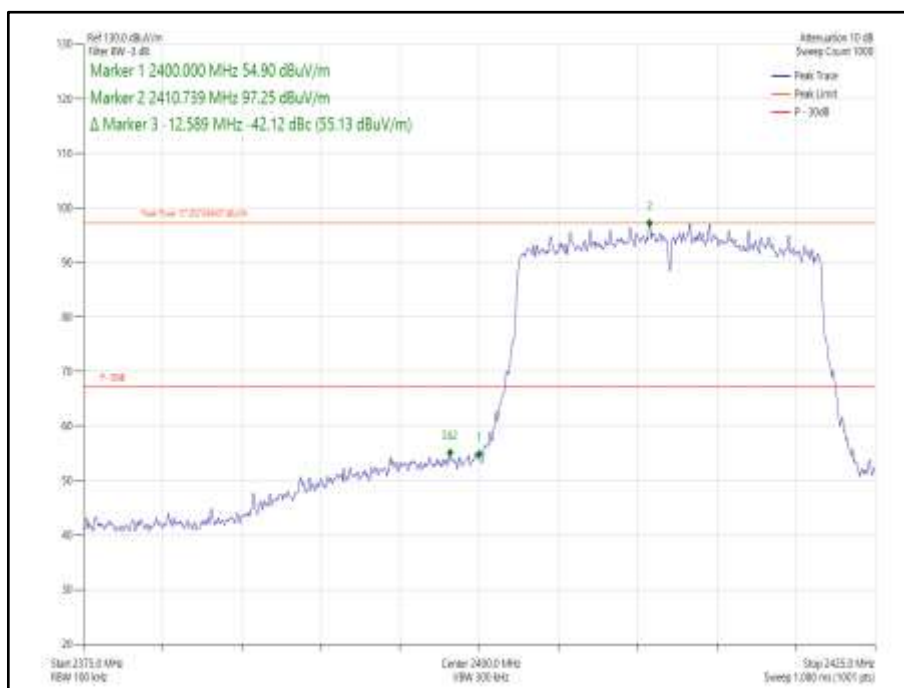

**Figure 64- 802.11ax HE20, Core 1, SU - 2412 MHz
Band Edge Frequency 2400 MHz**

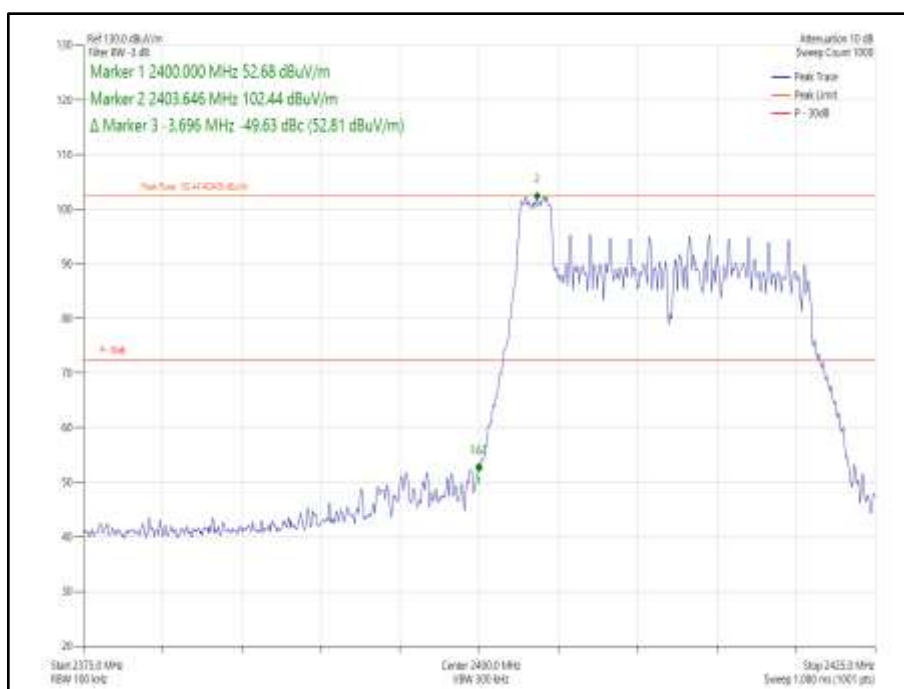


**Figure 65- 802.11ax HE20, Core 1, 26-0 - 2412 MHz
Band Edge Frequency 2400 MHz**



Mode	Data Rate /MCS	Resource size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
802.11n HT20, Cores 0-1	MCS7	-	-	2412	2400	-42.11
802.11ax HE20, Cores 0 -1	MCS7x1	SU	-	2412	2400	-41.48
802.11ax HE20, Cores 0 -1	MCS7x1	26	0	2412	2400	-50.78

Table 44 - MIMO Authorised Band Edge Results

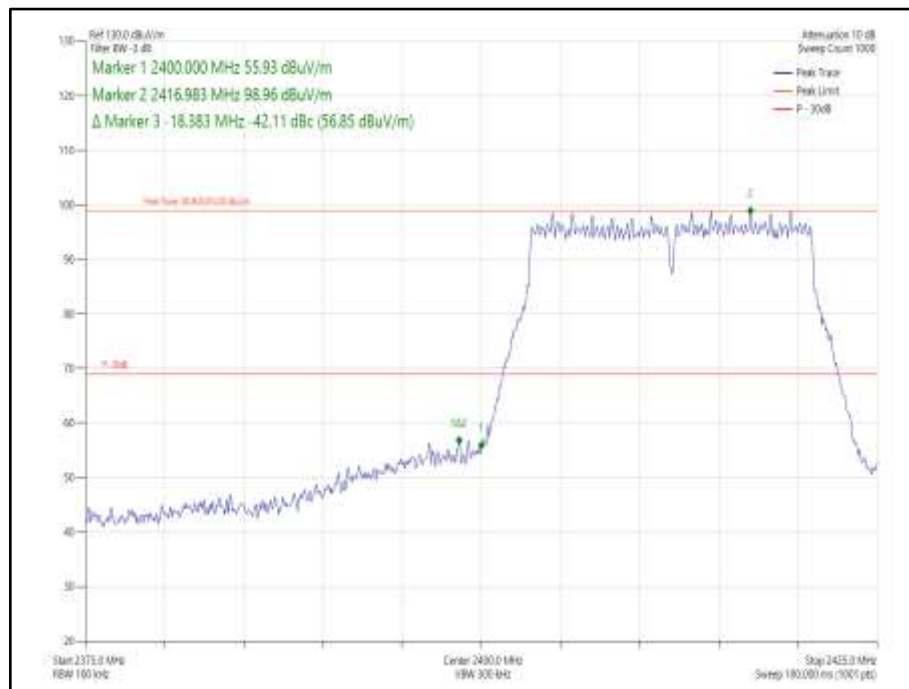

**Figure 66 - 802.11n HT20, Cores 0-1 - 2412 MHz
Band Edge Frequency 2400 MHz**

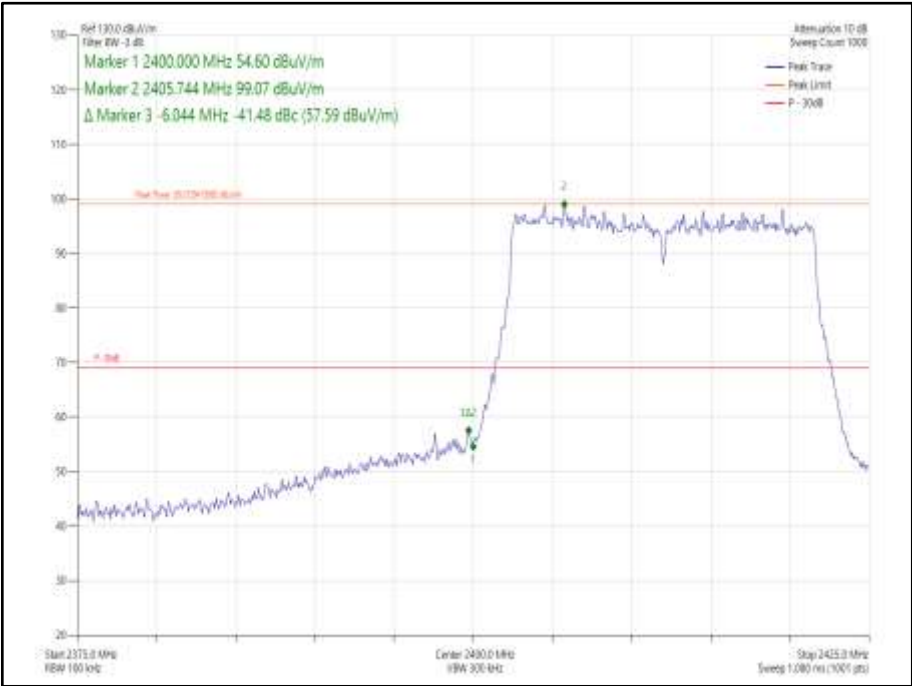


Figure 67- 802.11ax HE20, Cores 0-1, SU - 2412 MHz
Band Edge Frequency 2400 MHz

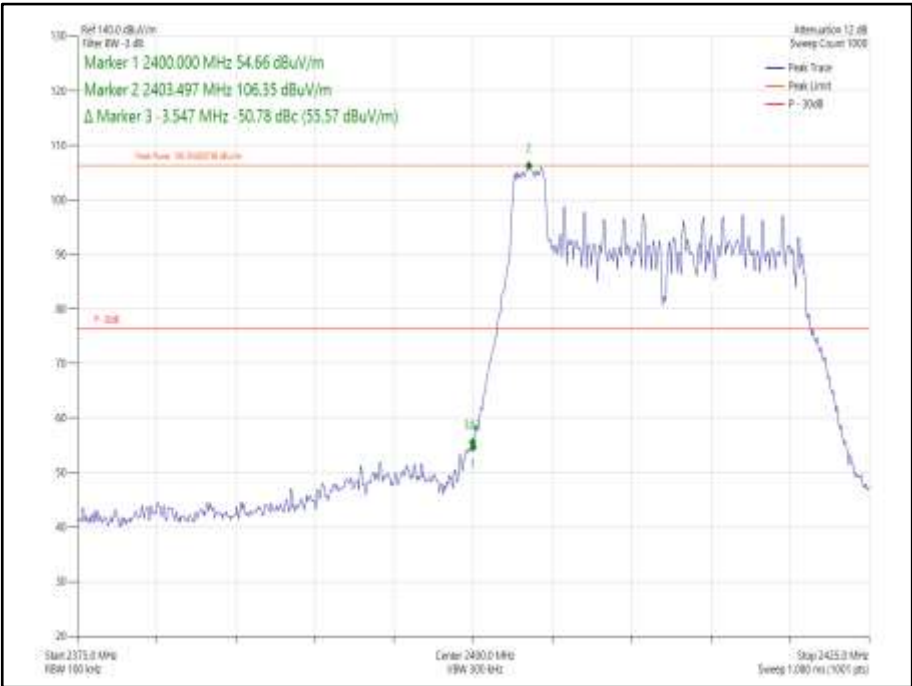


Figure 68- 802.11ax HE20, Cores 0-1, 26-0 - 2412 MHz
Band Edge Frequency 2400 MHz



FCC 47 CFR Part 15, Limit Clause 15.247 (d)

20 dB below the fundamental measured in a 100 kHz bandwidth using a peak detector. If the transmitter complies with the conducted power limits, based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB below the fundamental instead of 20 dB.

ISED RSS-247, Limit Clause 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.



2.4.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 11.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
EMI Test Receiver	Rohde & Schwarz	ESW44	5084	12	04-Feb-2021
EmX Emissions Software	TUV SUD	V2.1.0	5125	-	Software
Screened Room (11)	Rainford	Rainford	5136	36	01-Nov-2021
Mast	Maturo	TAM 4.0-P	5158	-	TU
Mast and Turntable Controller	Maturo	Maturo NCD	5159	-	TU
Turntable	Maturo	TT 15WF	5160	-	TU
Horn Antenna (1-10GHz)	Schwarzbeck	BBHA 9120 B	5215	12	10-Mar-2021
Thermo-Hygro-Barometer	PCE Instruments	PCE-THB-40	5475	12	17-Mar-2021
2m SMA Cable	Junkosha	MWX221-02000AMSAMS/A	5518	12	01-Apr-2021
8m N Type Cable	Junkosha	MWX221-08000NMSNMS/B	5522	12	24-Mar-2021

Table 45

TU - Traceability Unscheduled



2.5 Restricted Band Edges

2.5.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.205
ISED RSS-GEN, Clause 8.10

2.5.2 Equipment Under Test and Modification State

A2439, S/N: C02DM00M0FTN - Modification State 0

2.5.3 Date of Test

10-November-2020 to 10-January-2021

2.5.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 6.10.5.

Plots for average measurements were taken in accordance with ANSI C63.10, clause 4.1.4.2.5. These are shown for information purposes and were used to determine the worst-case measurement point. Final average measurements were then taken in accordance with ANSI C63.10, clause 4.1.4.2.2 to obtain the measurement result recorded in the test results tables.

Where duty cycle corrections were required for average results, these are included in the result tables but are not shown on the plots.

The following conversion can be applied to convert from dB μ V/m to μ V/m:
 $10^{(\text{Field Strength in dB}\mu\text{V/m}/20)}$.

Restricted band edge measurements were performed, with the device operating in SISO and MIMO configurations, across the various modes supported by the device.

The measurements displayed within this report, have been limited to those modes which have been shown to be worst case. Further measurements are held on file by TÜV SÜD and are available if required.

2.5.5 Environmental Conditions

Ambient Temperature	19.3 - 22.6 °C
Relative Humidity	34.9 - 63.9 %



2.5.6 Test Results

2.4 GHz WLAN

Mode	Data Rate /MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11b, Core 1	1 Mbps	-	-	2412	2390.0	56.40	46.24
802.11b, Core 1	1 Mbps	-	-	2462	2483.5	55.66	44.84
802.11b, Core 1	1 Mbps	-	-	2467	2483.5	56.84	47.07
802.11b, Core 1	1 Mbps	-	-	2472	2483.5	57.23	44.18
802.11g, Core 1	6 Mbps	-	-	2412	2390.0	58.44	44.52
802.11g, Core 1	6 Mbps	-	-	2462	2483.5	58.29	44.63
802.11g, Core 1	6 Mbps	-	-	2467	2483.5	64.16	47.61
802.11g, Core 1	6 Mbps	-	-	2472	2483.5	60.63	47.36
802.11n HT20, Core 1	MCS7	-	-	2412	2390.0	66.03	48.58
802.11n HT20, Core 1	MCS7	-	-	2462	2483.5	60.06	47.60
802.11n HT20, Core 1	MCS7	-	-	2467	2483.5	62.23	47.13
802.11n HT20, Core 1	MCS7	-	-	2472	2483.5	60.08	45.68
802.11ax HE20, Core 1	MCS7x1	SU	-	2412	2400	67.07	49.51
802.11ax HE20, Core 1	MCS7x1	26	0	2412	2400	58.31	43.68
802.11ax HE20, Core 1	MCS7x1	SU	-	2462	2483.5	61.62	48.21
802.11ax HE20, Core 1	MCS7x1	26	8	2462	2483.5	63.26	46.84
802.11ax HE20, Core 1	MCS7x1	SU	-	2467	2483.5	61.40	47.95
802.11ax HE20, Core 1	MCS7x1	26	8	2467	2483.5	63.10	46.37
802.11ax HE20, Core 1	MCS7x1	SU	-	2472	2483.5	62.62	44.45
802.11ax HE20, Core 1	MCS7x1	26	8	2472	2483.5	64.56	46.12

Table 46 - SISO Restricted Band Edge Results

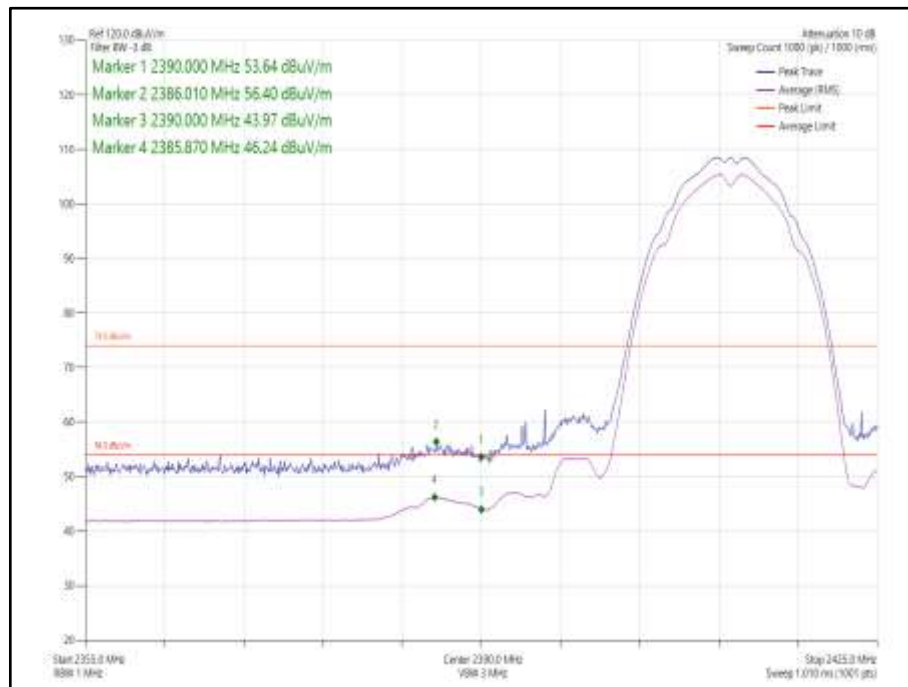


Figure 69 - 802.11b, Core 1 - 2412 MHz, Band Edge Frequency 2390.0 MHz

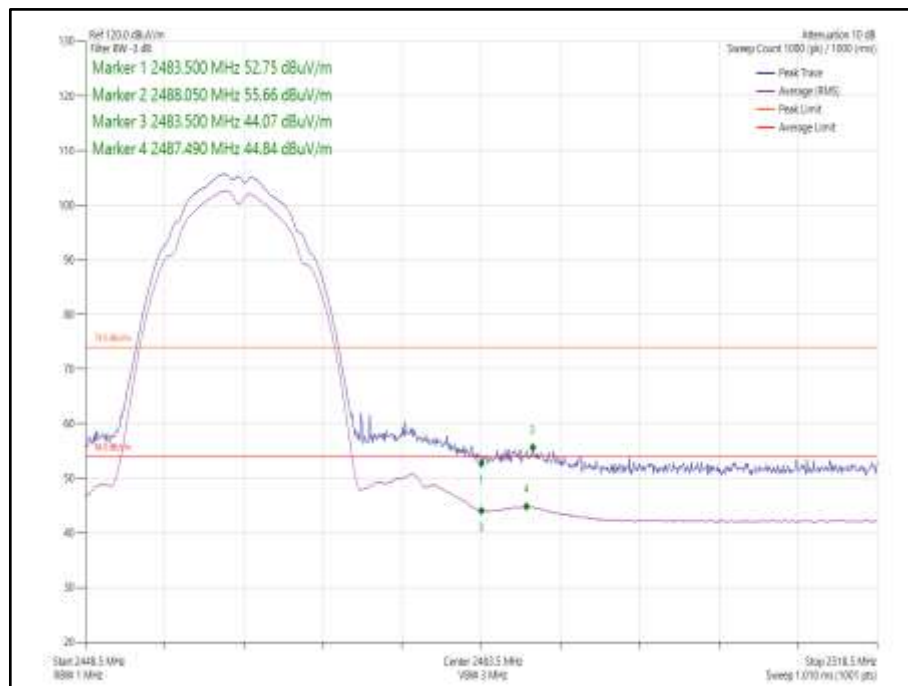


Figure 70 - 802.11b, Core 1 - 2462 MHz, Band Edge Frequency 2483.5 MHz

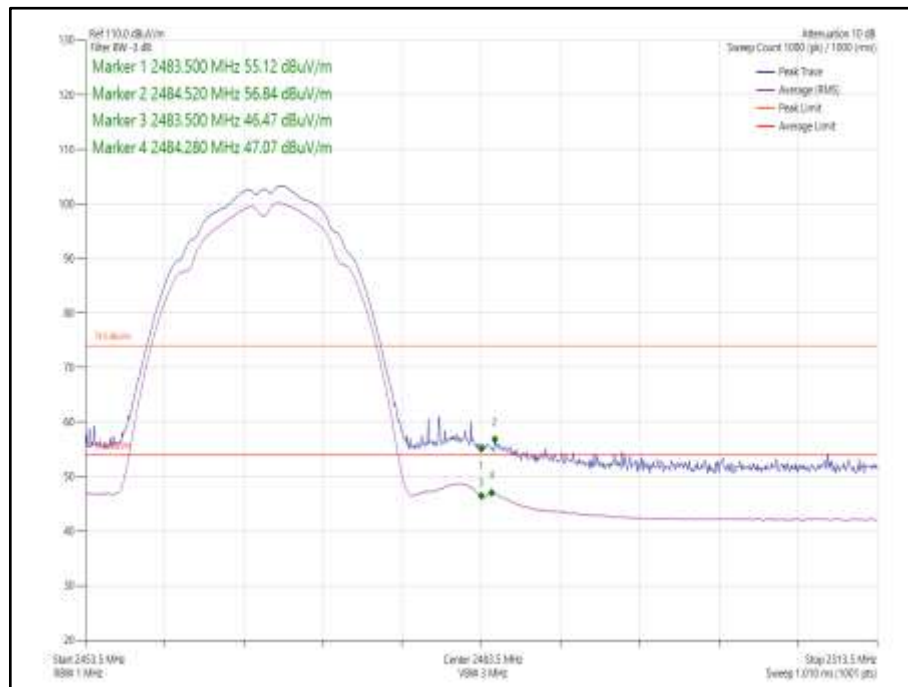


Figure 71 - 802.11b, Core 1 - 2467 MHz, Band Edge Frequency 2483.5 MHz

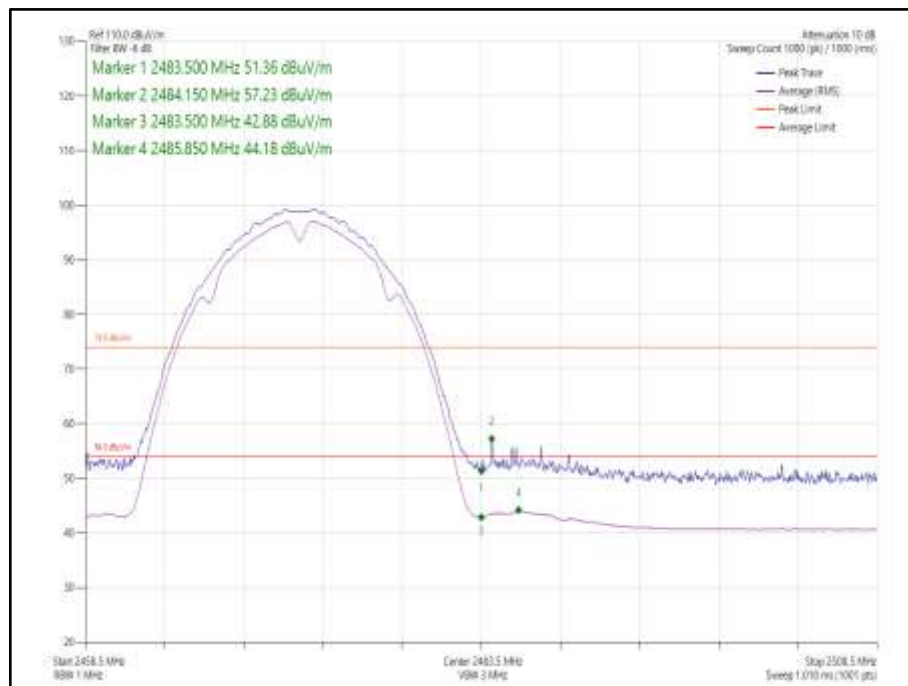


Figure 72 - 802.11b, Core 1 - 2472 MHz, Band Edge Frequency 2483.5 MHz

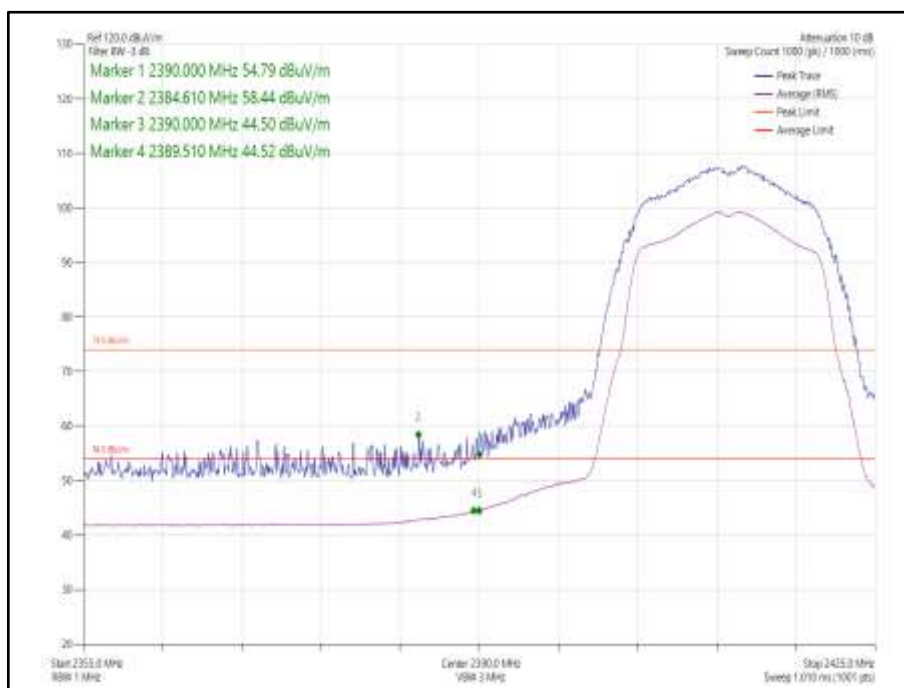


Figure 73 - 802.11g, Core 1 - 2412 MHz, Band Edge Frequency 2390.0 MHz

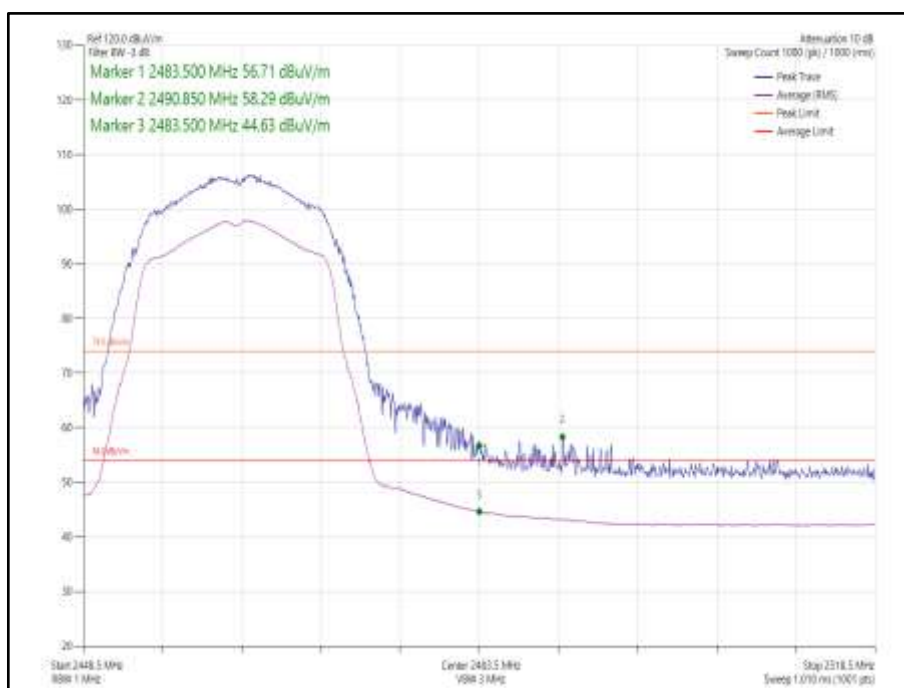


Figure 74 - 802.11g, Core 1 - 2462 MHz, Band Edge Frequency 2483.5 MHz

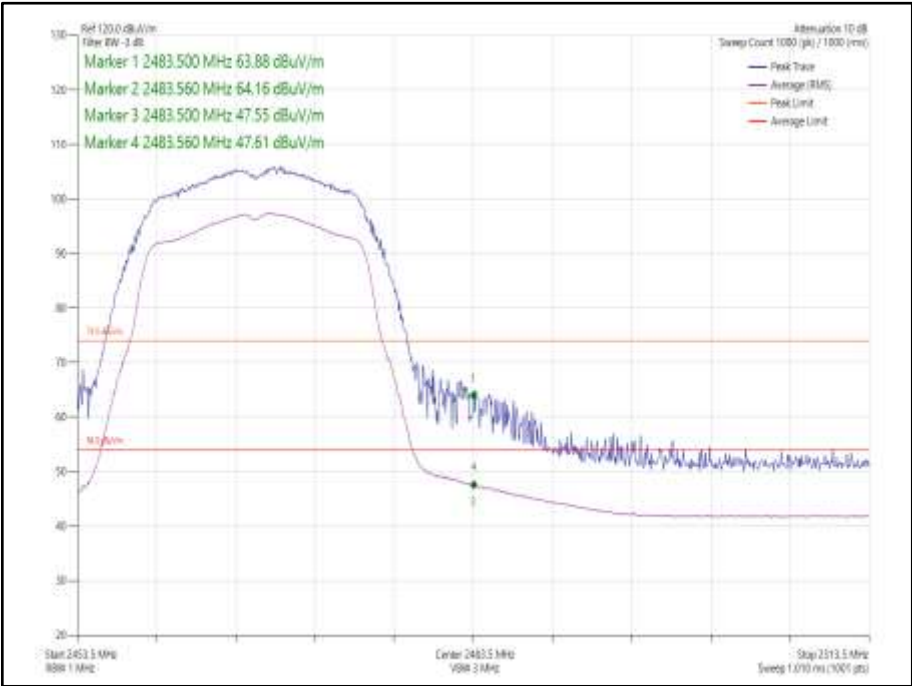


Figure 75 - 802.11g, Core 1 - 2467 MHz, Band Edge Frequency 2483.5 MHz

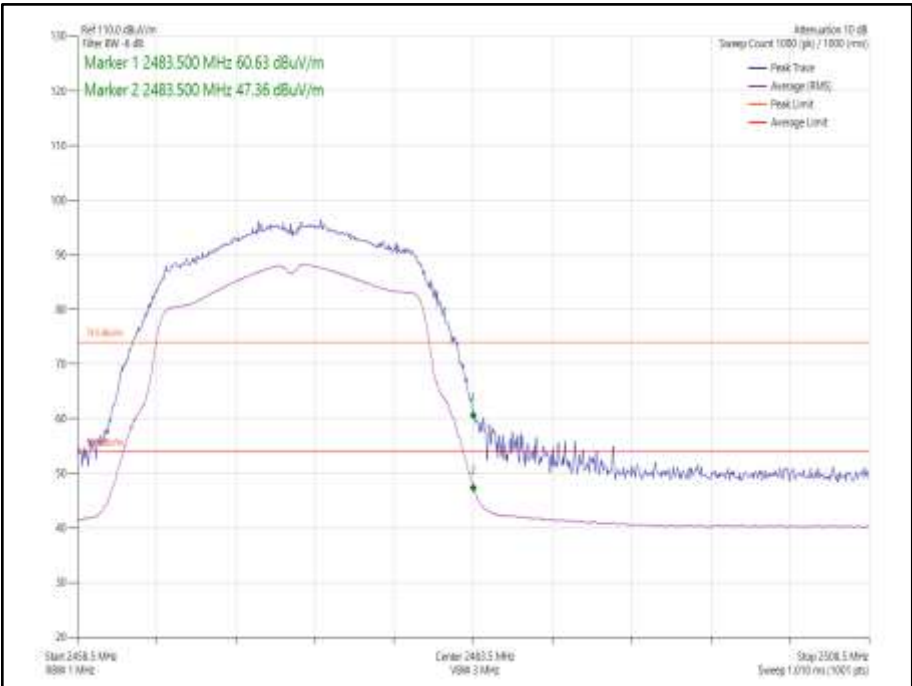


Figure 76 - 802.11g, Core 1 - 2472 MHz, Band Edge Frequency 2483.5 MHz

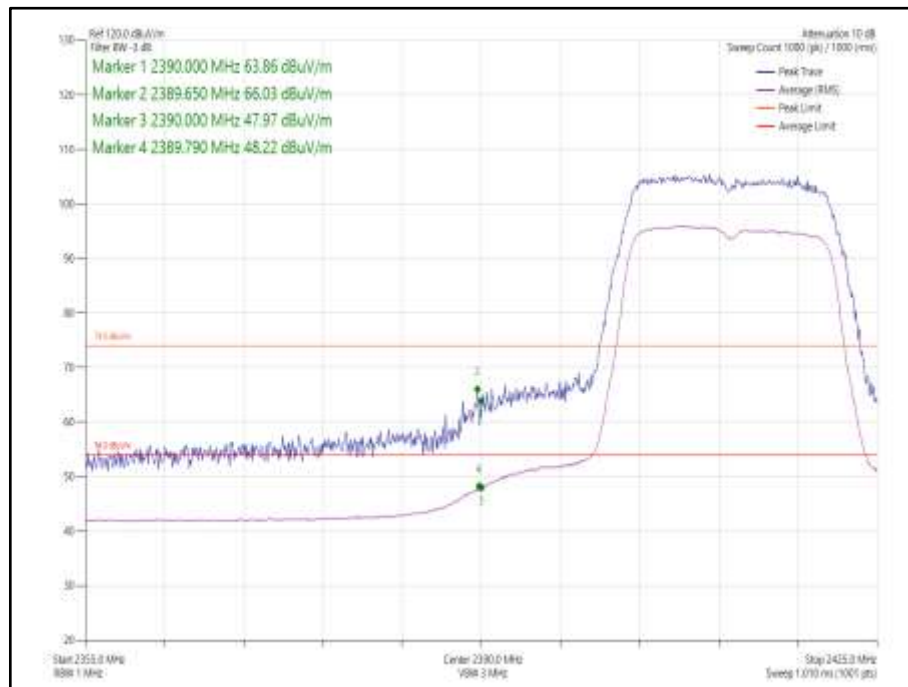


Figure 77 - 802.11n, HT20, Core 1 - 2412 MHz, Band Edge Frequency 2390 MHz

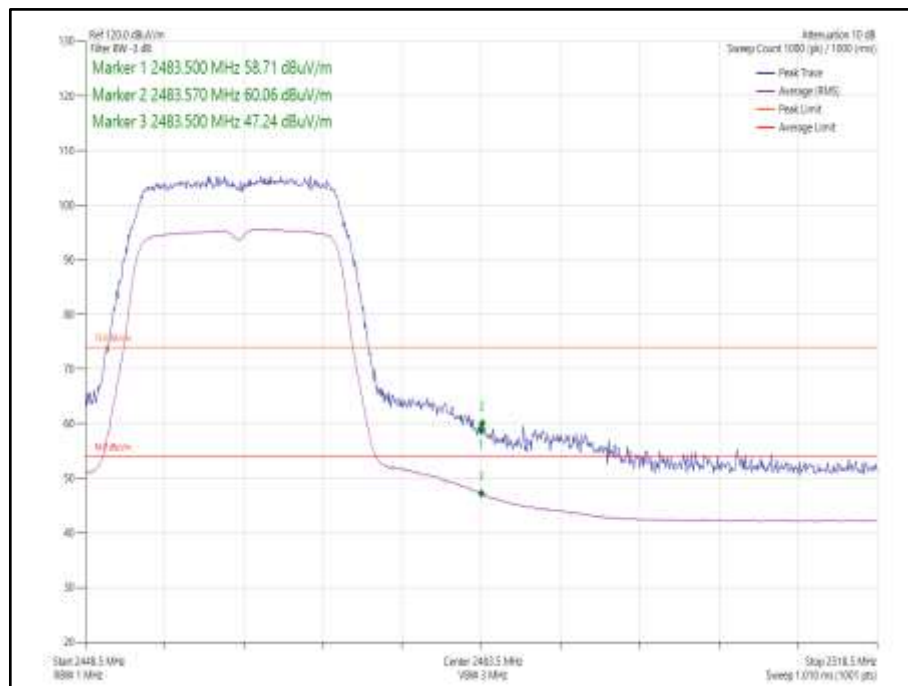


Figure 78 - 802.11n HT20, Core 1 - 2462 MHz, Band Edge Frequency 2483.5 MHz

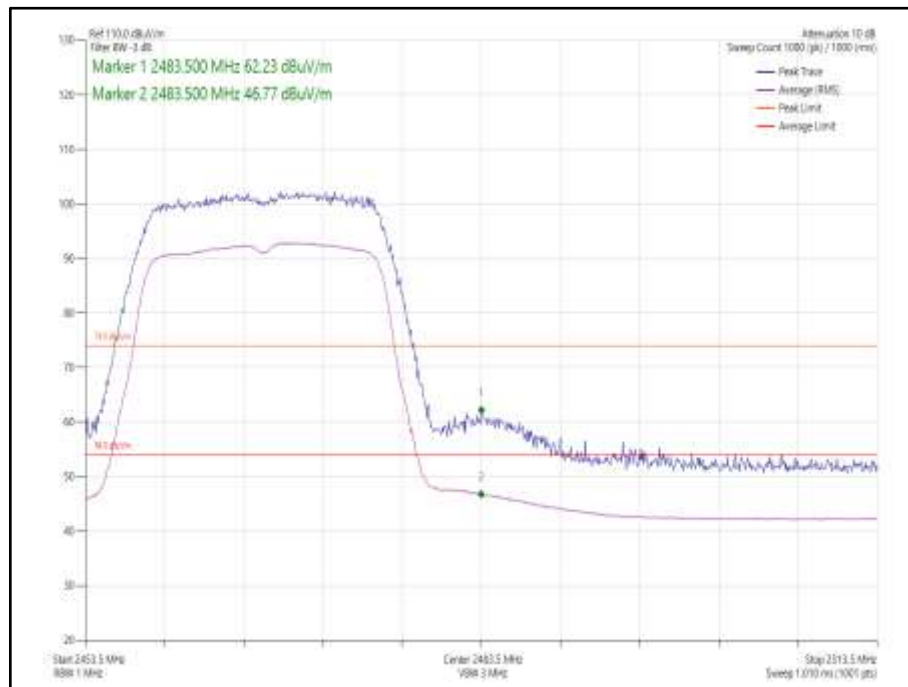


Figure 79 - 802.11n HT20, Core 1 - 2467 MHz, Band Edge Frequency 2483.5 MHz

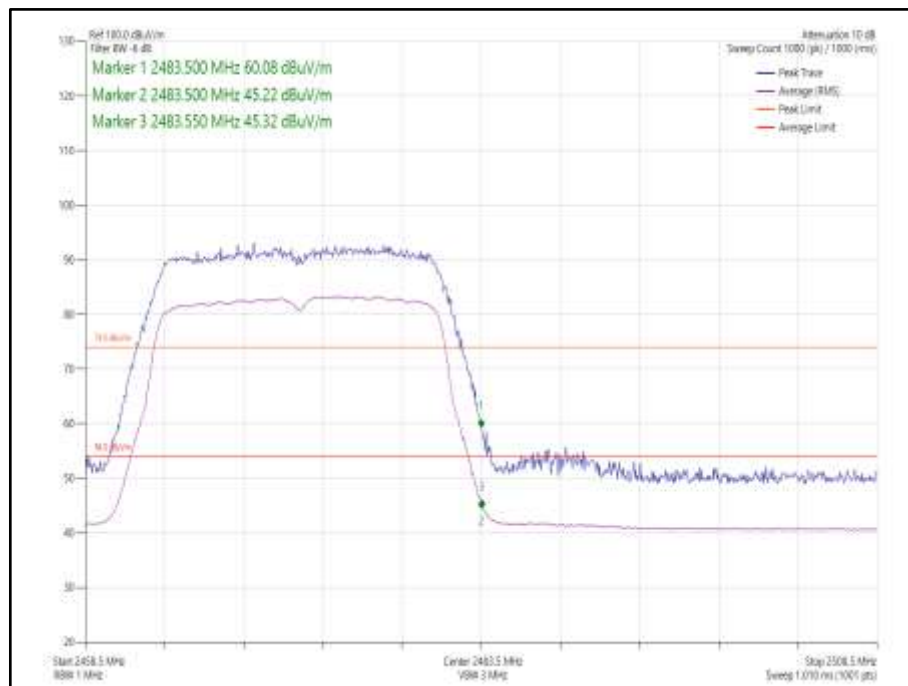


Figure 80 - 802.11n HT20, Core 1 - 2472 MHz, Band Edge Frequency 2483.5 MHz



Figure 81 - 802.11ax HE20, Core 1, SU - 2412 MHz, Band Edge Frequency 2390 MHz

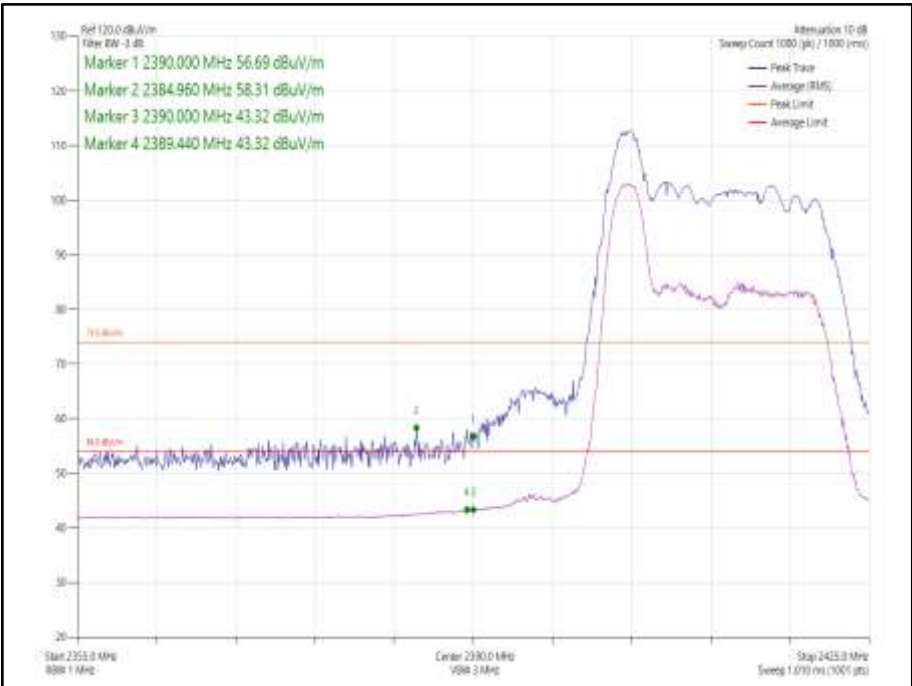


Figure 82 - 802.11ax HE20, Core 1, 26-0 - 2412 MHz, Band Edge Frequency 2390 MHz

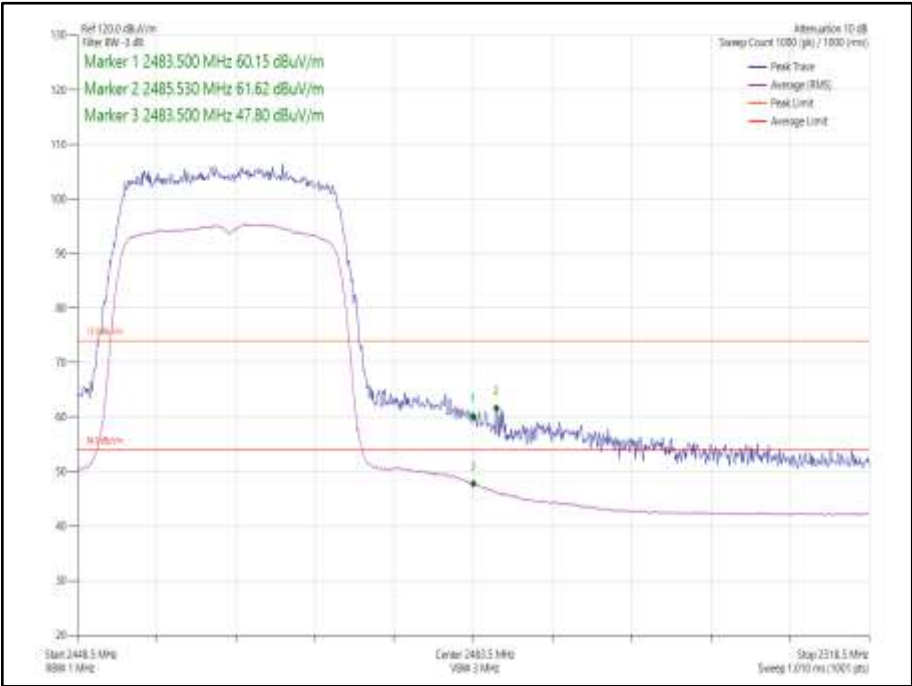


Figure 83 - 802.11ax HE20, Core 1, SU - 2462 MHz, Band Edge Frequency 2483.5 MHz

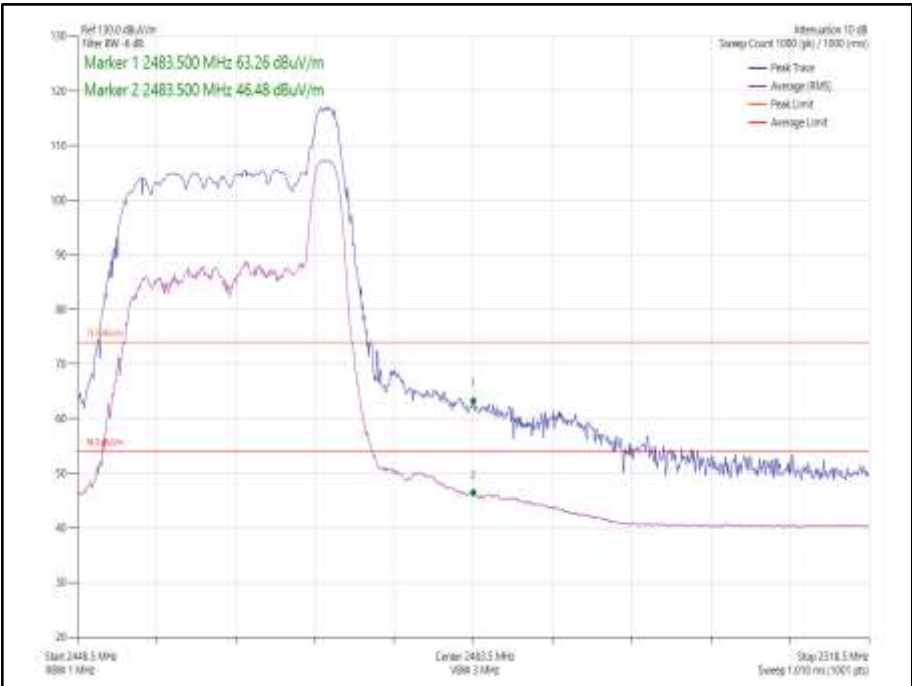


Figure 84 - 802.11ax HE20, Core 1, 26-8 - 2462 MHz, Band Edge Frequency 2483.5 MHz

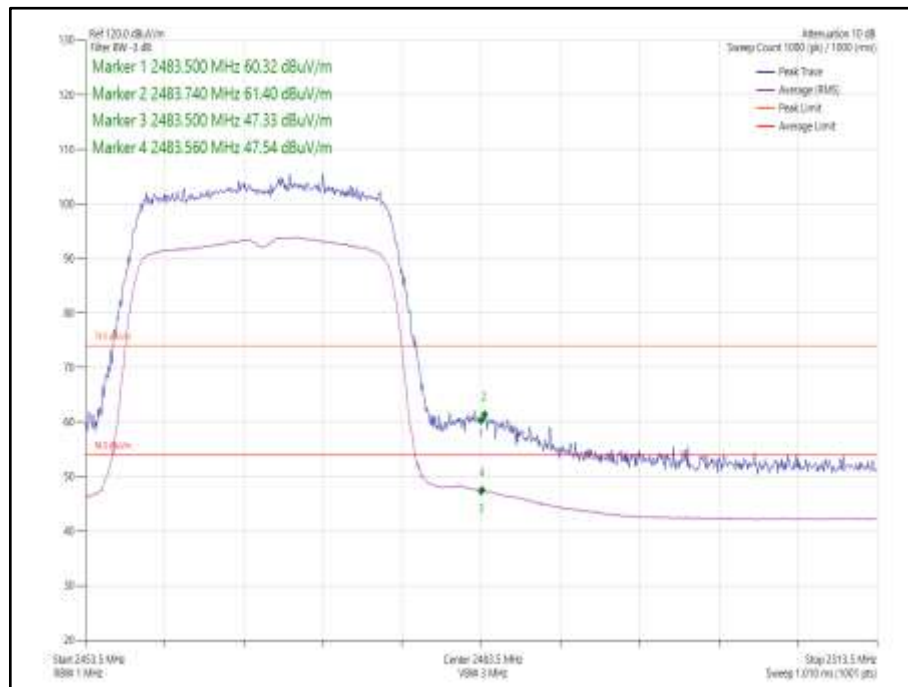


Figure 85 - 802.11ax HE20, Core 1, SU - 2467 MHz, Band Edge Frequency 2483.5 MHz

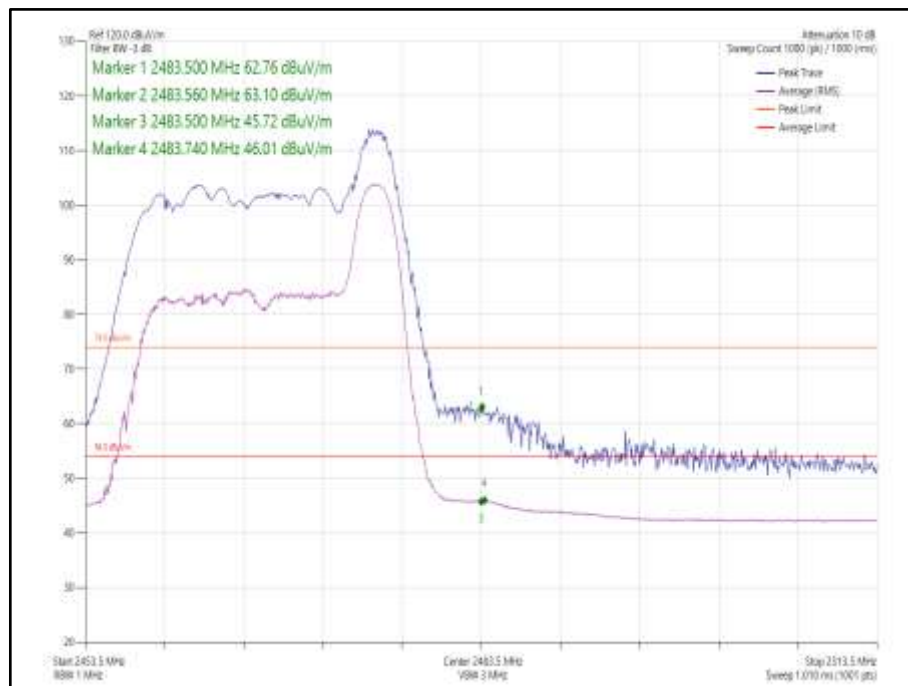


Figure 86 - 802.11ax HE20, Core 1, 26-8 - 2467 MHz, Band Edge Frequency 2483.5 MHz

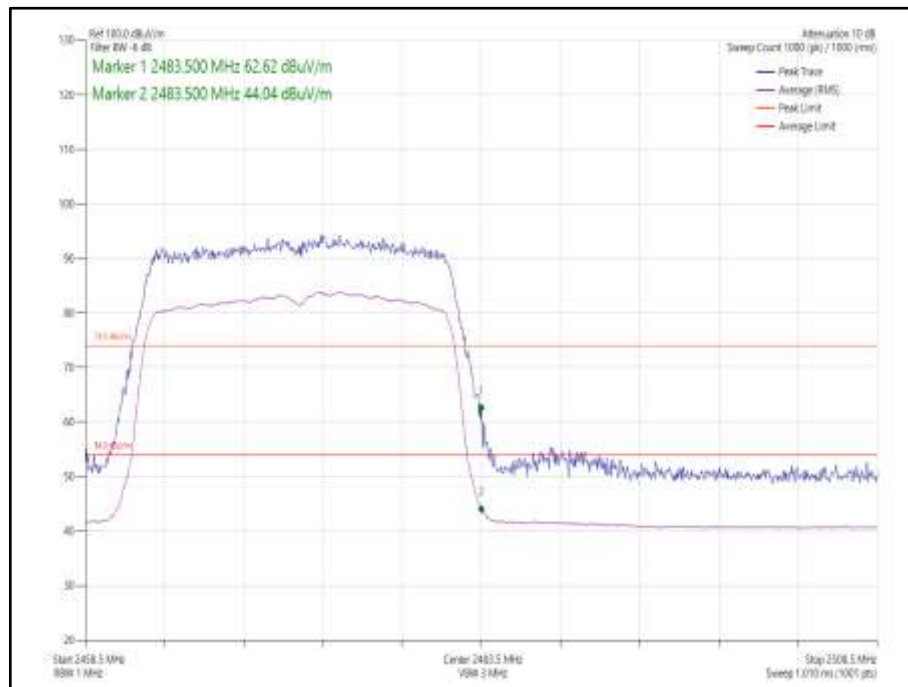


Figure 87 - 802.11ax HE20, Core 1, SU - 2472 MHz, Band Edge Frequency 2483.5 MHz

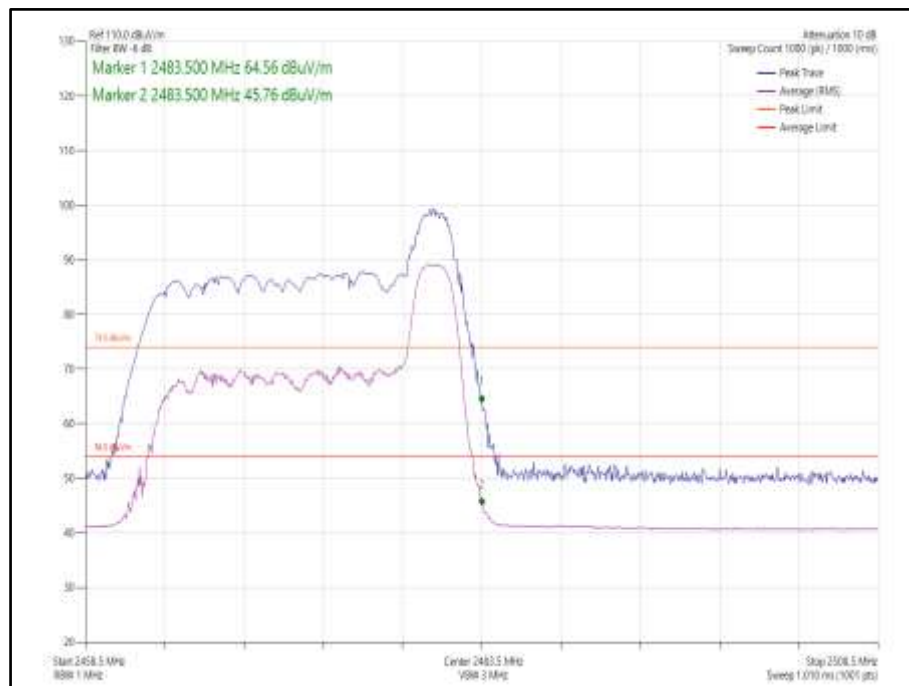


Figure 88 - 802.11ax HE20, Core 1, 26-8 - 2472 MHz, Band Edge Frequency 2483.5 MHz



Mode	Data Rate/MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11n HT20, Core 0-1	MCS7	-	-	2412	2390.0	65.15	47.88
802.11n HT20, Core 0-1	MCS7	-	-	2462	2483.5	62.29	48.86
802.11n HT20, Core 0-1	MCS7	-	-	2467	2483.5	59.79	47.86
802.11n HT20, Core 0-1	MCS7	-	-	2472	2483.5	60.08	45.67
802.11ax HE20, Core 0-1	MCS7x1	SU	-	2412	2400	65.58	48.98
802.11ax HE20, Core 0-1	MCS7x1	26	0	2412	2400	64.32	44.70
802.11ax HE20, Core 0-1	MCS7x1	SU	-	2462	2483.5	61.62	48.21
802.11ax HE20, Core 0-1	MCS7x1	26	8	2462	2483.5	63.29	47.37
802.11ax HE20, Core 0-1	MCS7x1	SU	-	2467	2483.5	65.31	47.62
802.11ax HE20, Core 0-1	MCS7x1	26	8	2467	2483.5	65.73	47.59
802.11ax HE20, Core 0-1	MCS7x1	SU	-	2472	2483.5	62.46	45.63
802.11ax HE20, Core 0-1	MCS7x1	26	8	2472	2483.5	66.16	46.01

Table 47 – MIMO Restricted Band Edge Results

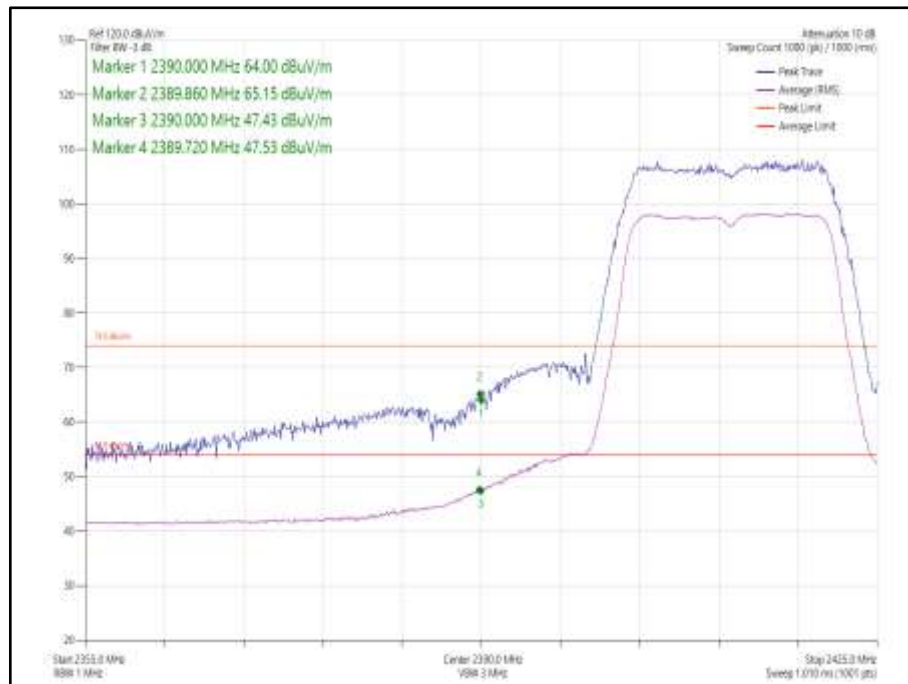


Figure 89 - 802.11n HT20, Core 0-1 - 2412 MHz, Band Edge Frequency 2390 MHz

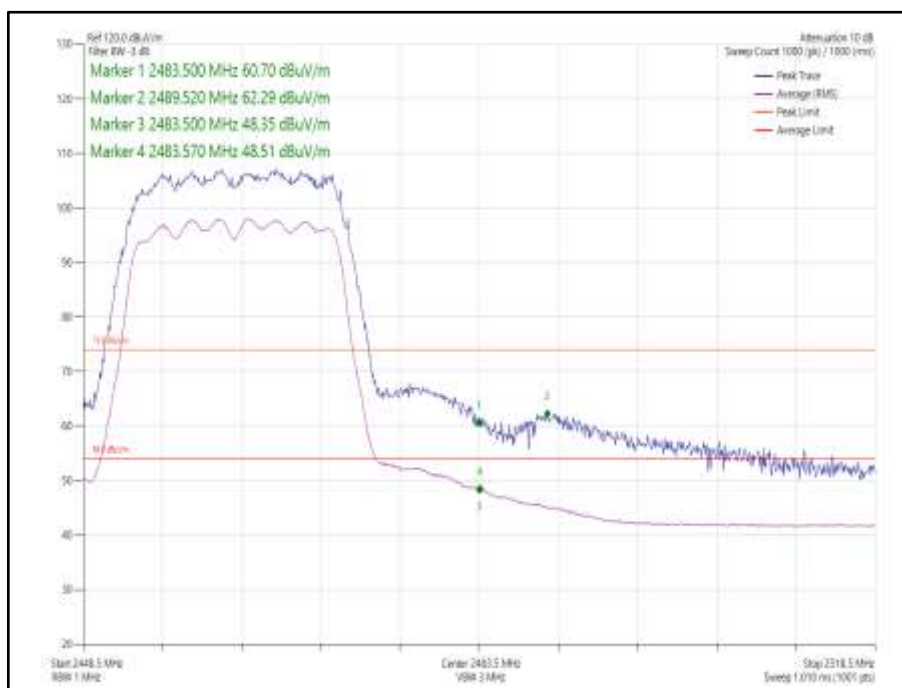


Figure 90 - 802.11n HT20, Core 0-1 - 2462 MHz, Band Edge Frequency 2483.5 MHz

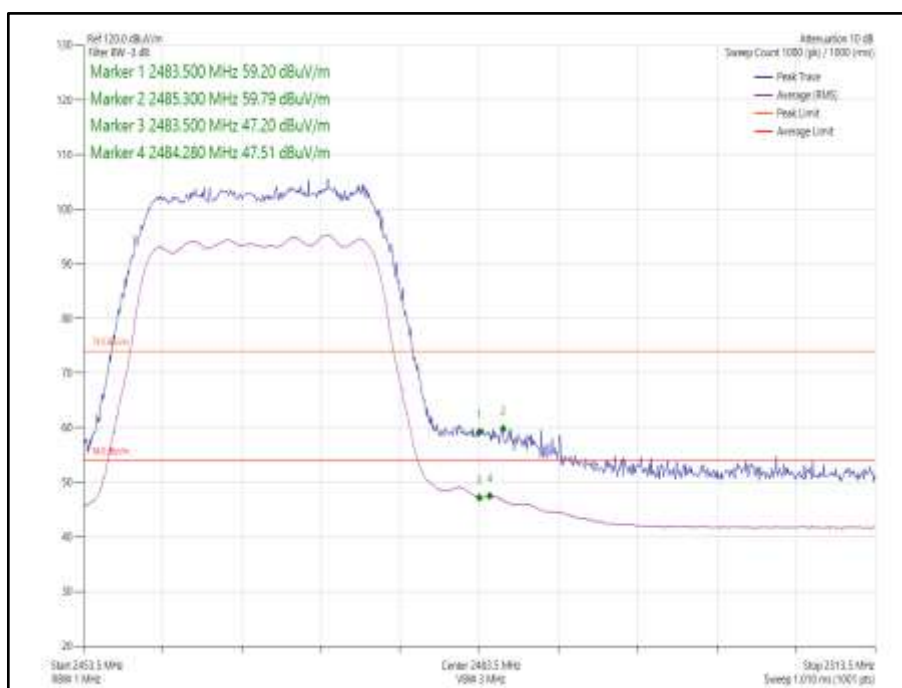


Figure 91 - 802.11n HT20, Core 0-1 - 2467 MHz, Band Edge Frequency 2483.5 MHz

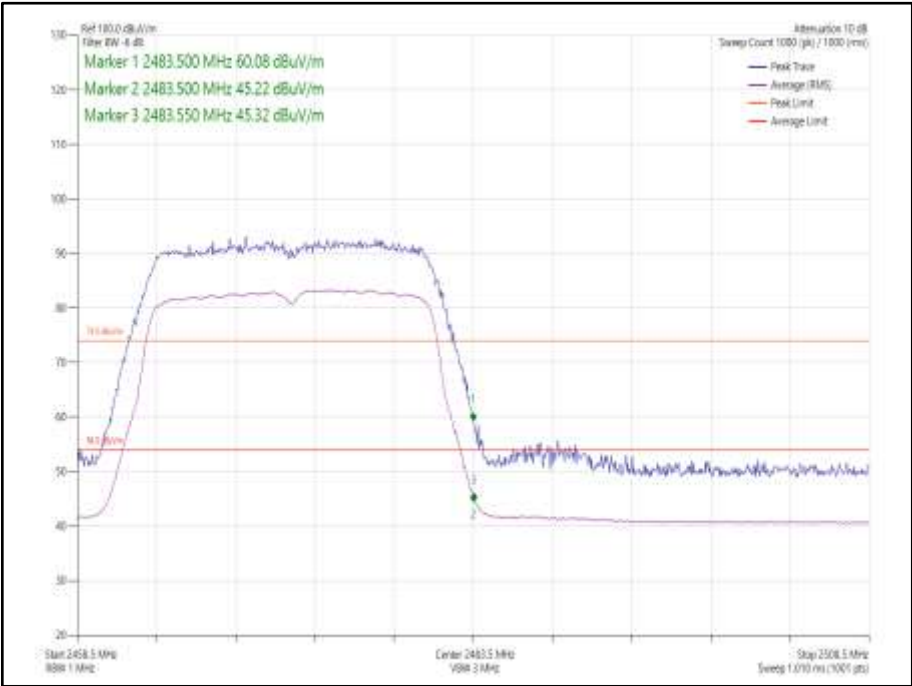


Figure 92 - 802.11n HT20, Core 0-1 - 2472 MHz, Band Edge Frequency 2483.5 MHz

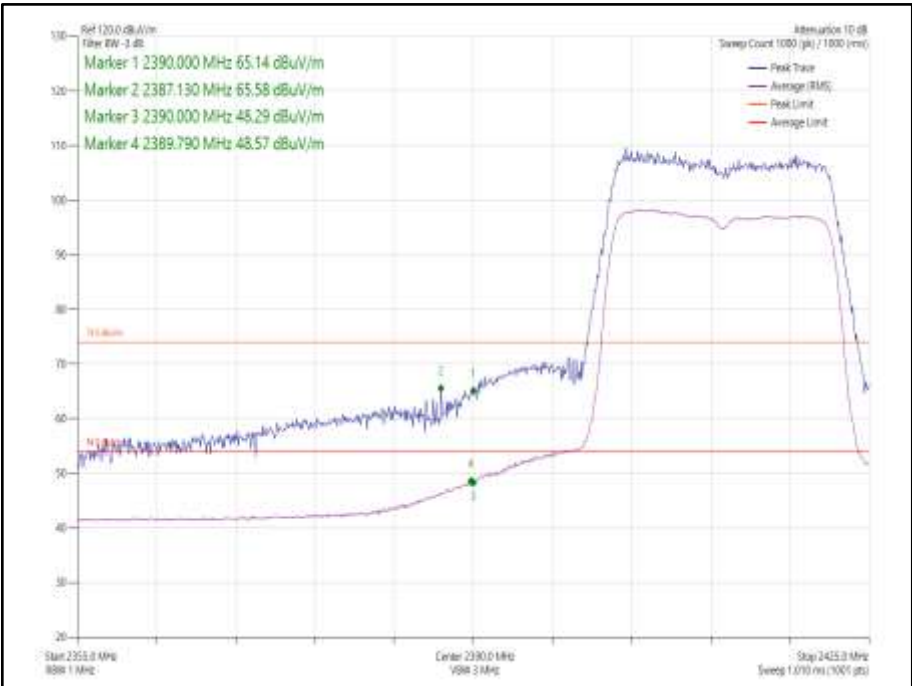


Figure 93 - 802.11ax HE20, Core 0-1, SU - 2412 MHz, Band Edge Frequency 2390 MHz

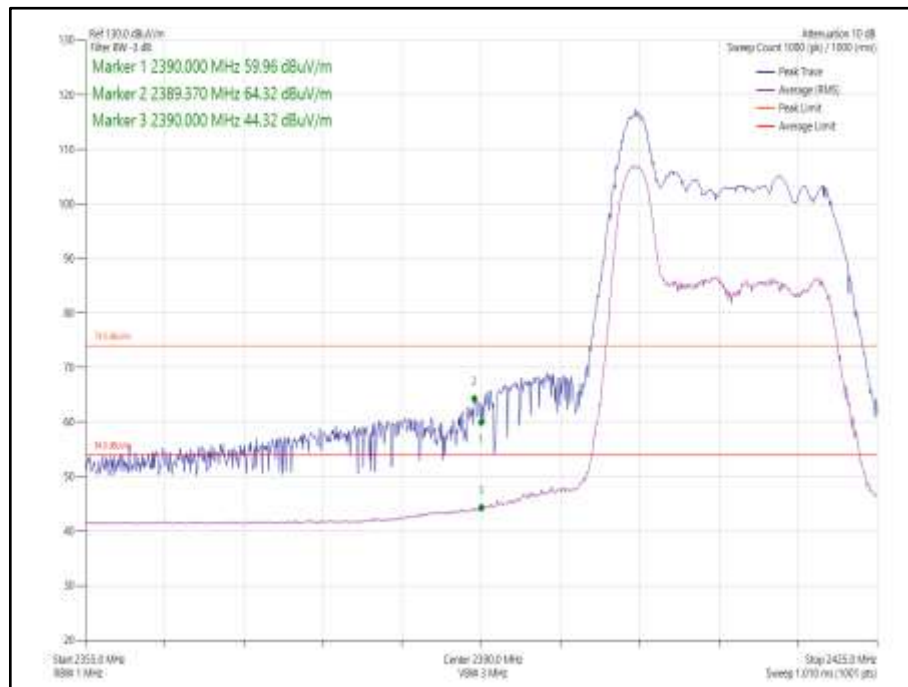


Figure 94 - 802.11ax HE20, Core 0-1, 26-0 - 2412 MHz, Band Edge Frequency 2390 MHz

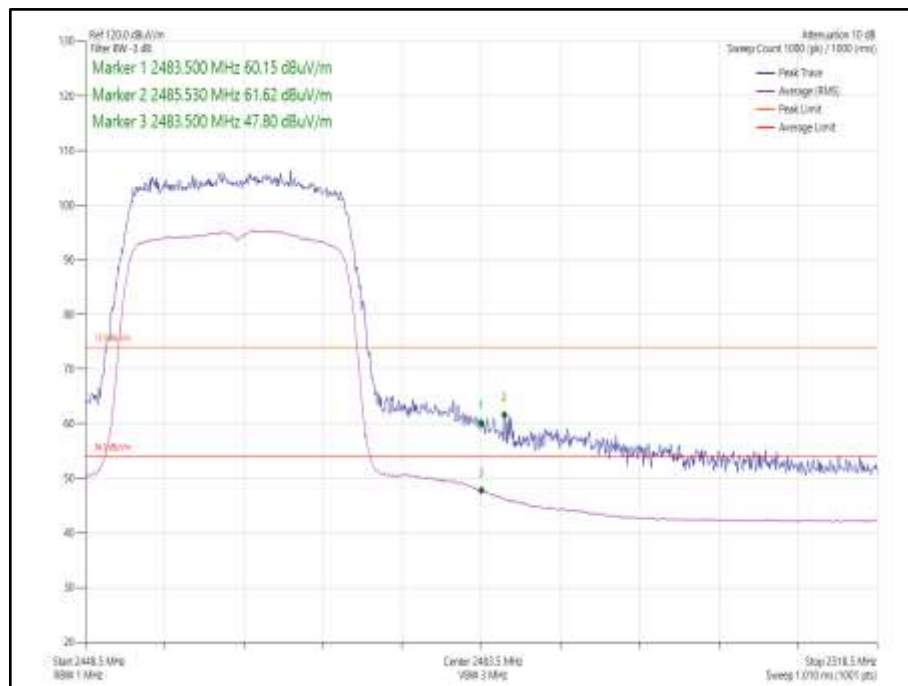


Figure 95 - 802.11ax HE20, Core 0-1, SU - 2462 MHz, Band Edge Frequency 2483.5 MHz

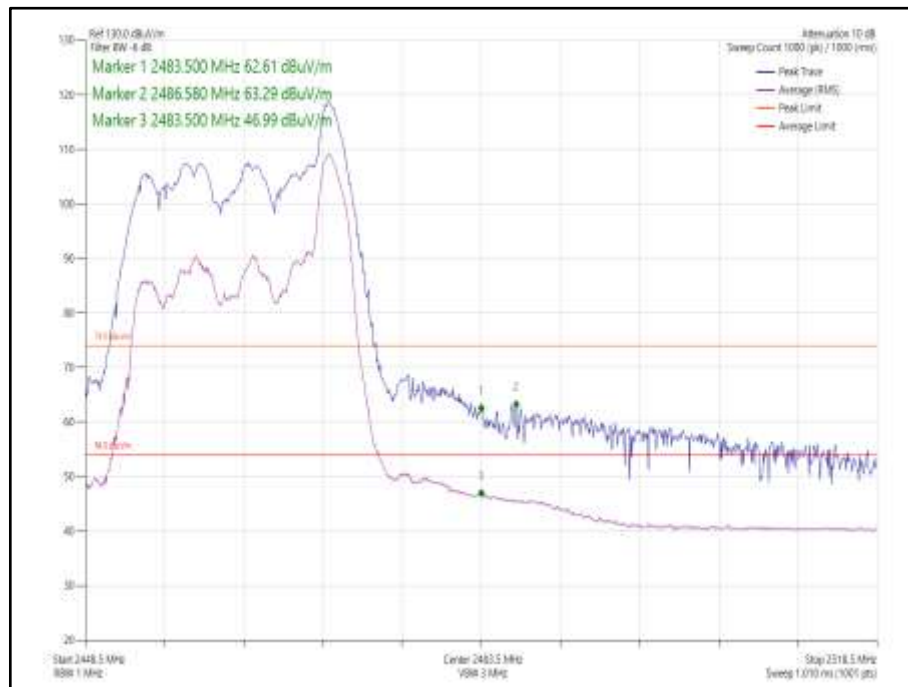


Figure 96 - 802.11ax HE20, Core 0-1, 26-8 - 2462 MHz, Band Edge Frequency 2483.5 MHz

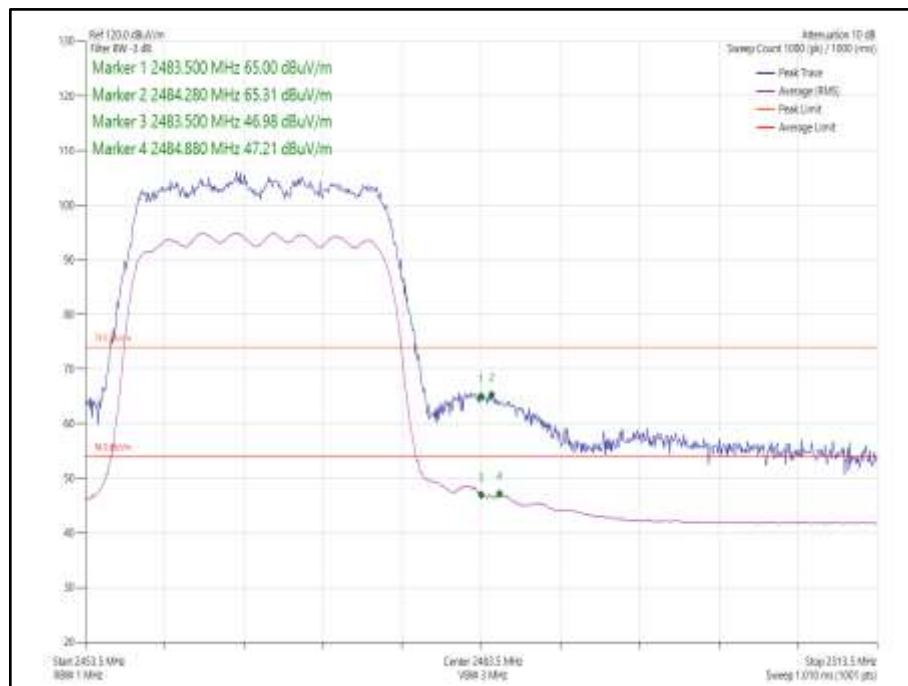


Figure 97 - 802.11ax HE20, Core 0-1, SU - 2467 MHz, Band Edge Frequency 2483.5 MHz

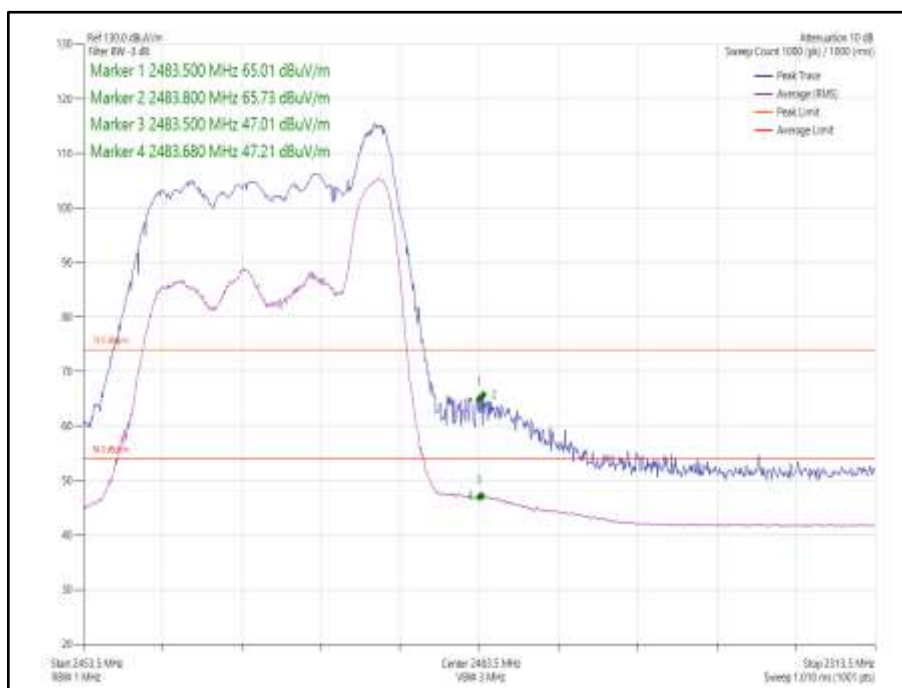


Figure 98 - 802.11ax HE20, Core 0-1, 26-8 - 2467 MHz, Band Edge Frequency 2483.5 MHz

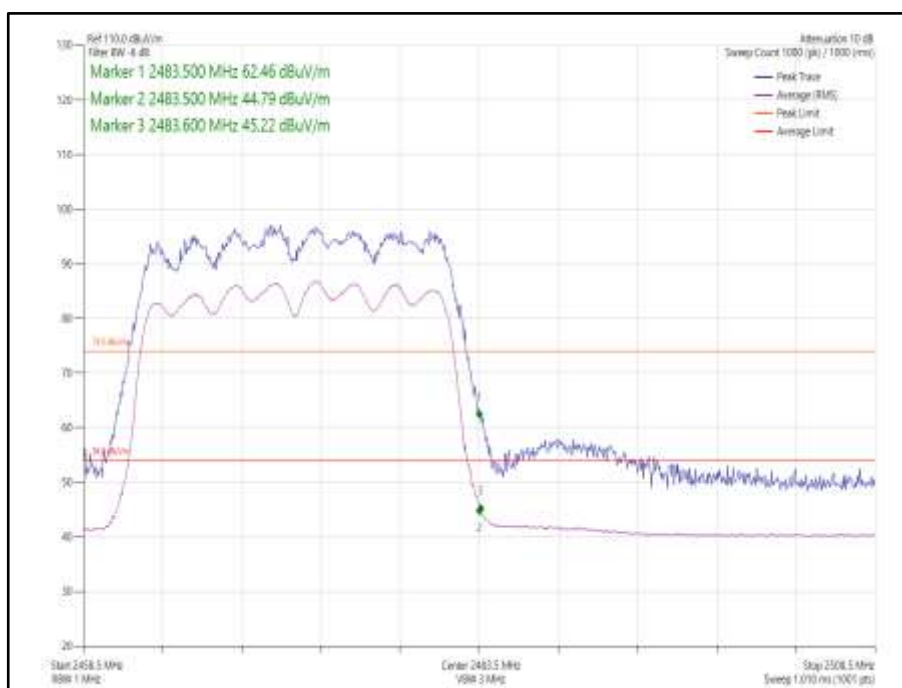


Figure 99 - 802.11ax HE20, Core 0-1, SU - 2472 MHz, Band Edge Frequency 2483.5 MHz

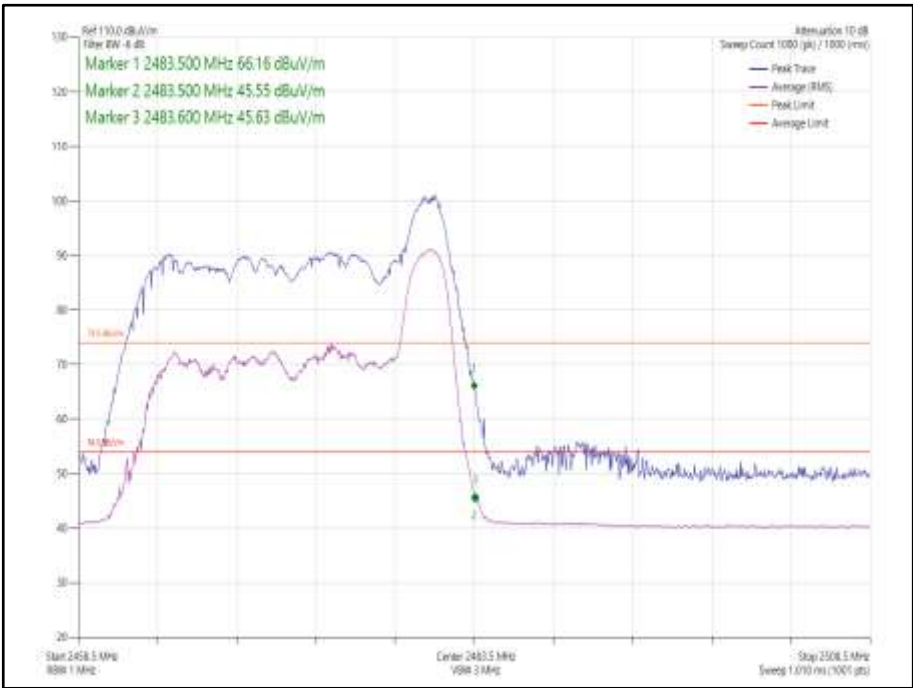


Figure 100 - 802.11ax HE20, Core 0-1, 26-8 - 2472 MHz, Band Edge Frequency 2483.5 MHz

FCC 47 CFR Part 15, Limit Clause 15.209

Frequency (MHz)	Field Strength (µV/m at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

Table 48

ISED RSS-GEN, Limit Clause 8.9

Frequency (MHz)	Field Strength (µV/m at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960*	500

Table 49

*Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for licence-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.



2.5.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 11.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
EMI Test Receiver	Rohde & Schwarz	ESW44	5084	12	04-Feb-2021
EmX Emissions Software	TUV SUD	V2.1.0	5125	-	Software
Screened Room (11)	Rainford	Rainford	5136	36	01-Nov-2021
Mast	Maturo	TAM 4.0-P	5158	-	TU
Mast and Turntable Controller	Maturo	Maturo NCD	5159	-	TU
Turntable	Maturo	TT 15WF	5160	-	TU
Horn Antenna (1-10GHz)	Schwarzbeck	BBHA 9120 B	5215	12	10-Mar-2021
Thermo-Hygro-Barometer	PCE Instruments	PCE-THB-40	5475	12	17-Mar-2021
2m SMA Cable	Junkosha	MWX221-02000AMSAMS/A	5518	12	01-Apr-2021
8m N Type Cable	Junkosha	MWX221-08000NMSNMS/B	5522	12	24-Mar-2021

Table 50

TU - Traceability Unscheduled



2.6 Spurious Radiated Emissions

2.6.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (d) and 15.205
ISED RSS-247, Clause 5.5
ISED RSS-GEN, Clause 6.13

2.6.2 Equipment Under Test and Modification State

A2439, S/N: C02DM00M0FTN - Modification State 0

2.6.3 Date of Test

11-December-2020 to 19-December-2020

2.6.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 6.3, 6.5 and 6.6.

The EUT was placed on the non-conducting platform in a manner typical of a normal installation. Ports on the EUT were terminated with loads as described in ANSI C63.4 clause 6.2.4. One port of each type was loaded.

For frequencies > 1 GHz, plots for average measurements were taken in accordance with ANSI C63.10, clause 11.12.2.5.2.

Where duty cycle corrections were required for average results, these are included in the result tables but are not shown on the plots.

The plots shown are the characterisation of the EUT. The limits on the plots represent the most stringent case for restricted bands (74/54 dBuV/m), when compared to 30 dBc outside restricted bands. The limits shown have been used as a threshold to determine where further measurements are necessary. Where results are within 10 dB of the limits shown on the plots, further investigation was carried out and reported in results tables.

Note the edges of the fundamental may be visible and in some cases appear to exceed the limit in these pre-scans. These band edge emissions were not measured in this section and are investigated fully in sections 2.3 and 2.4.

The following conversion can be applied to convert from dBμV/m to μV/m:
 $10^{(\text{Field Strength in dB}\mu\text{V/m}/20)}$

To determine the emission characteristic of the EUT above 18 GHz, the test antenna was swept over all faces of the EUT whilst observing a spectral display. The frequency of any emissions of interest was noted for formal measurement at the correct measurement distance of 1m. This procedure was repeated for all relevant transmit operating channels.

At a measurement distance of 1 meter the limit line was increased by $20 \cdot \text{LOG}(3/1) = 9.54$ dB.

Where formal measurements have been necessary, the results have been presented in the emissions table.

In the 30 MHz to 1 GHz range pre-scans were only performed on the main radio mid channel (2437 MHz).



2.6.5 Example Test Setup Diagram

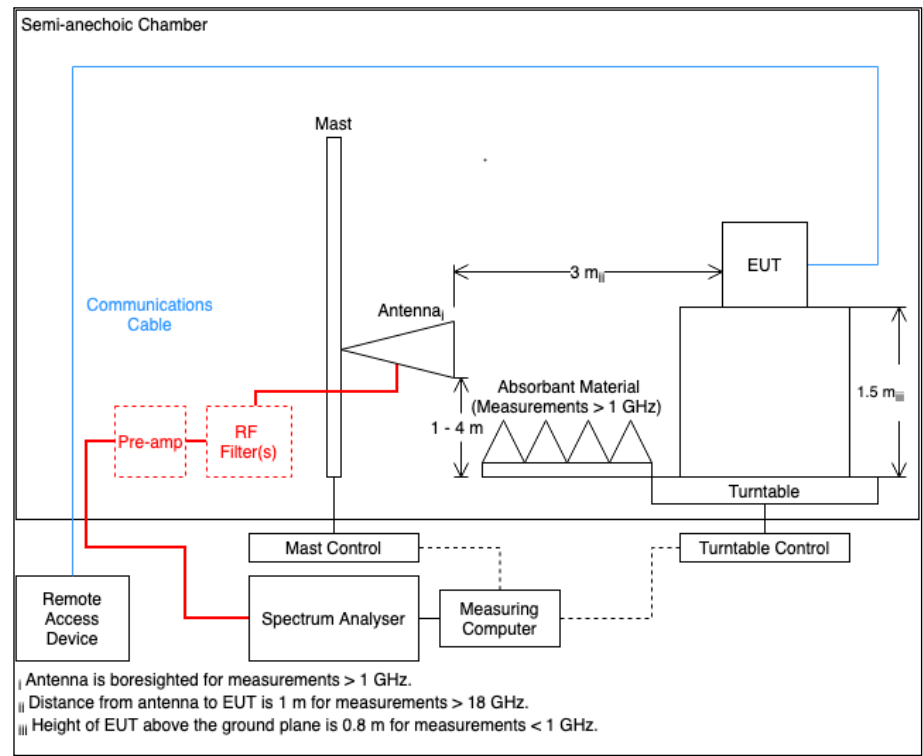


Figure 101

2.6.6 Environmental Conditions

Ambient Temperature 18.6 - 26.6 °C
Relative Humidity 27.5 - 48.0 %

2.6.7 Test Results

2.4 GHz WLAN

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 51 - 2412 MHz (CH1), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz

*No emissions found within 10 dB of the limit.

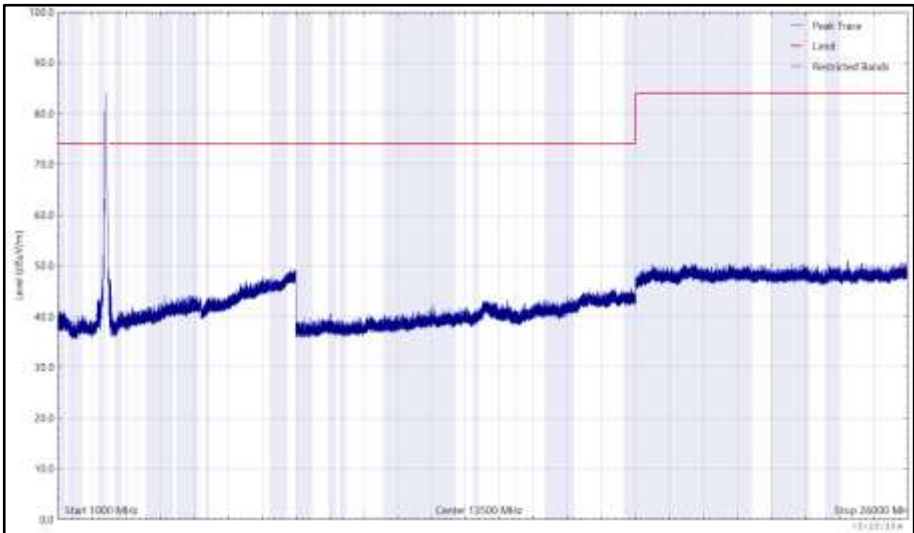


Figure 102 - 2412 MHz (CH1), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal (Peak)

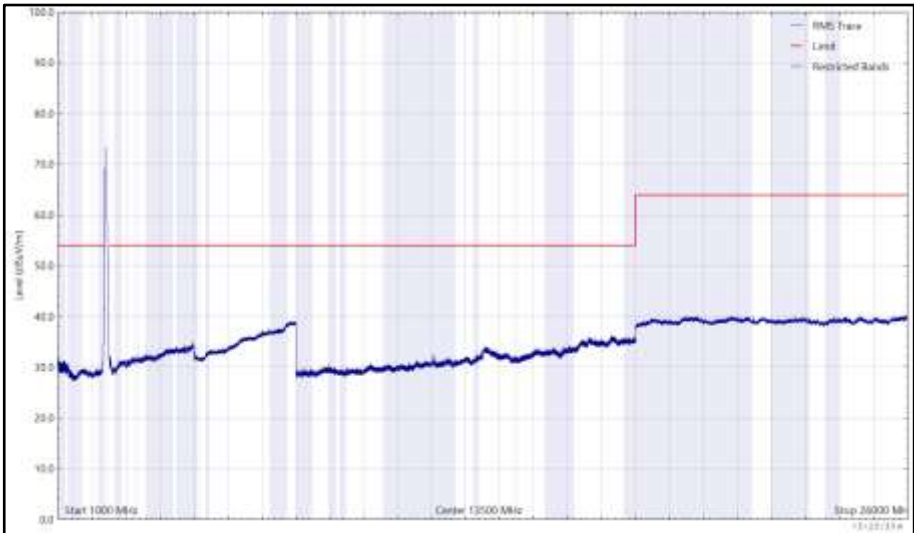


Figure 103 - 2412 MHz (CH1), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal (RMS)

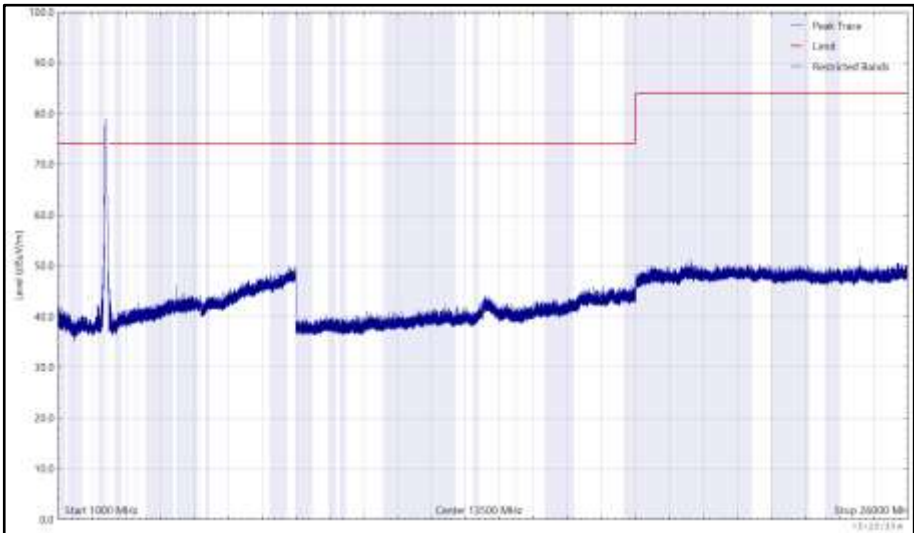




Figure 104 - 2412 MHz (CH1), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical (Peak)

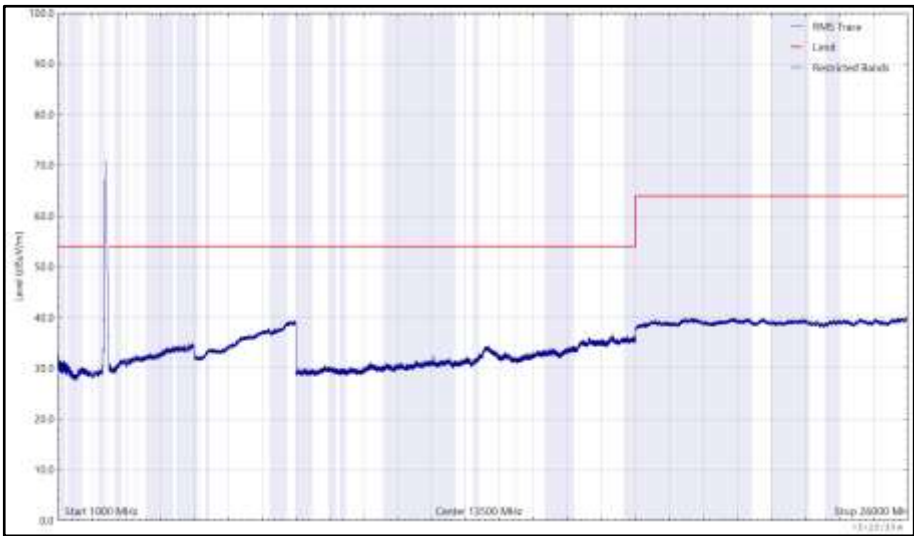


Figure 105 - 2412 MHz (CH1), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical (RMS)

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
4875.183	35.8	54.0	-18.2	RMS	3	110	Vertical

Table 52 - 2437 MHz (CH6), HT20, CDD, Core 0 + Core 1, 30 MHz to 26 GHz

No other emissions found within 10 dB of the limit.

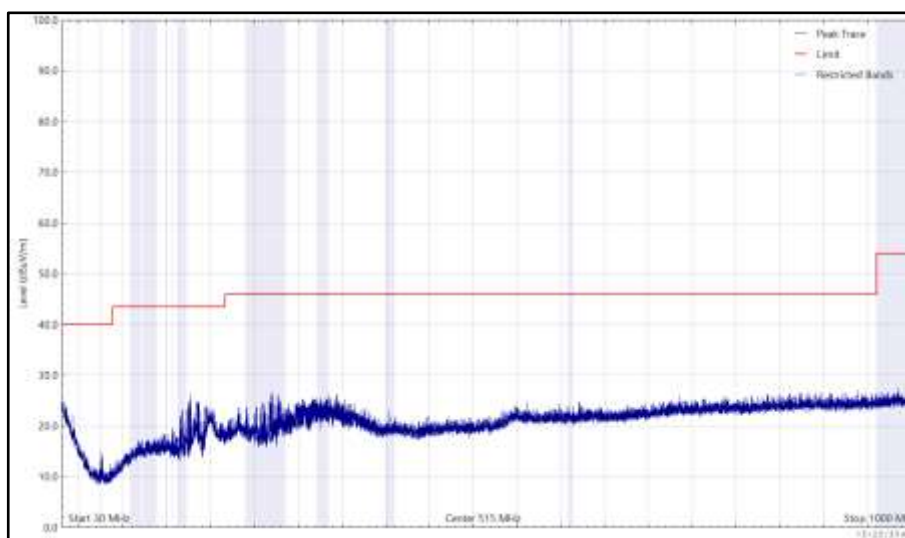


Figure 106 - 2437 MHz (CH6), HT20, CDD, Core 0 + Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

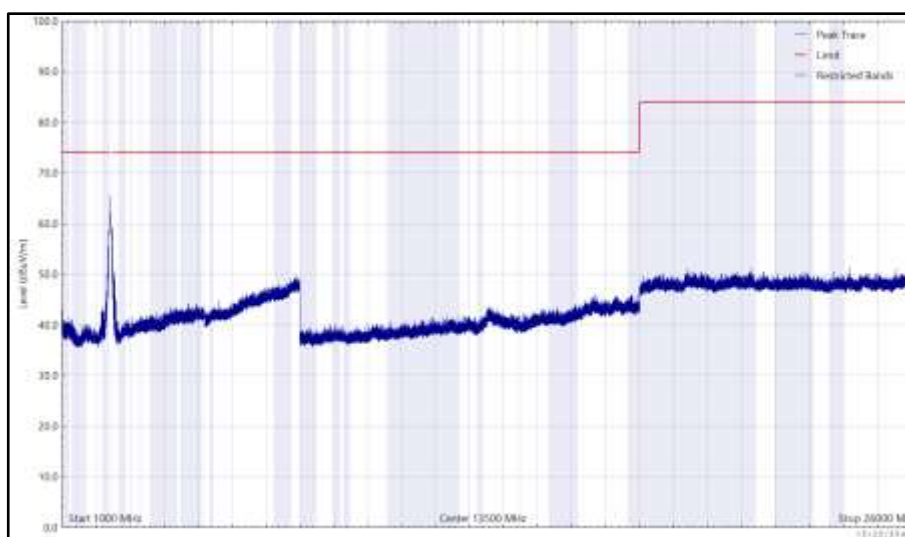


Figure 107 - 2437 MHz (CH6), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal (Peak)

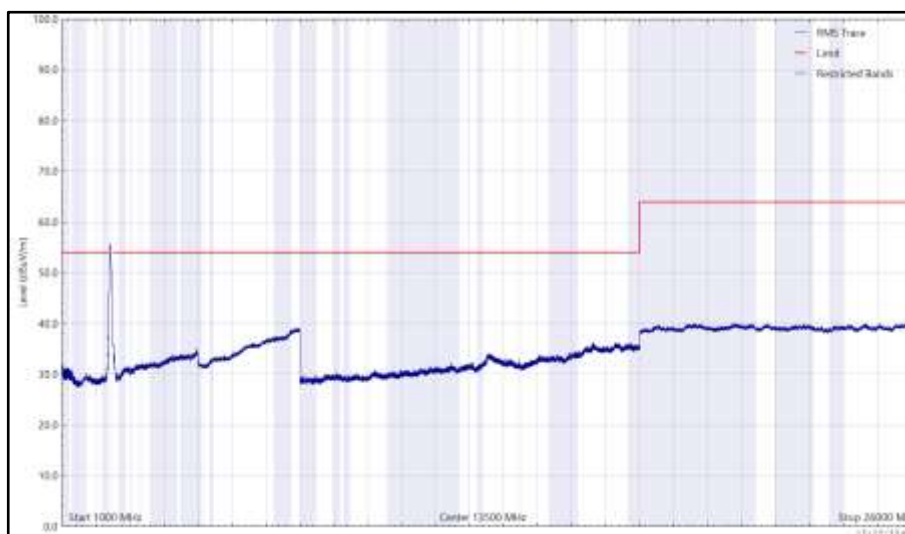


Figure 108 - 2437 MHz (CH6), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal (RMS)

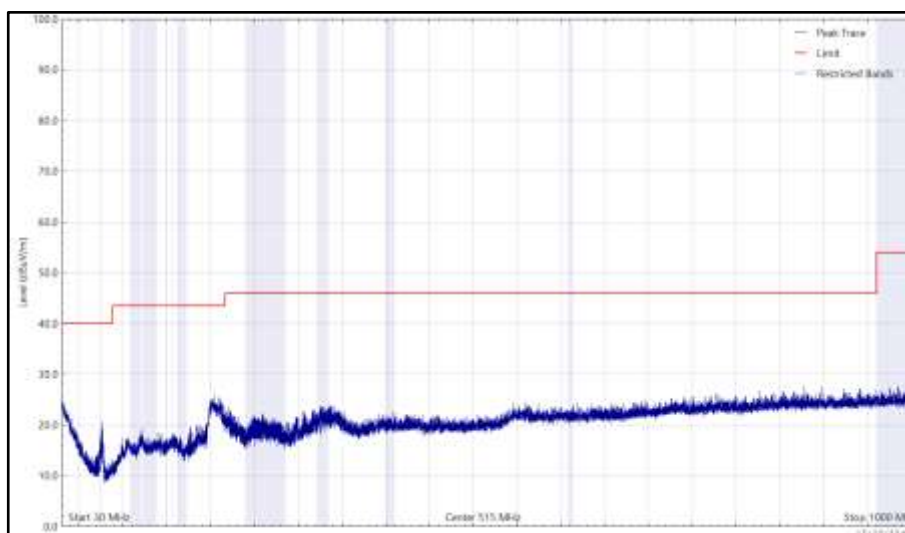


Figure 109 - 2437 MHz (CH6), HT20, CDD, Core 0 + Core 1, 30 MHz to 1 GHz, Vertical (Peak)

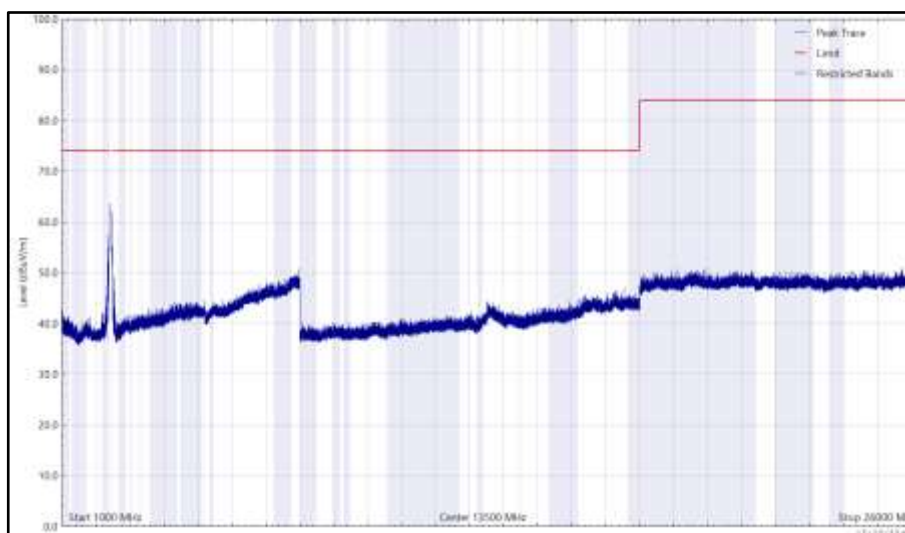


Figure 110 - 2437 MHz (CH6), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical (Peak)

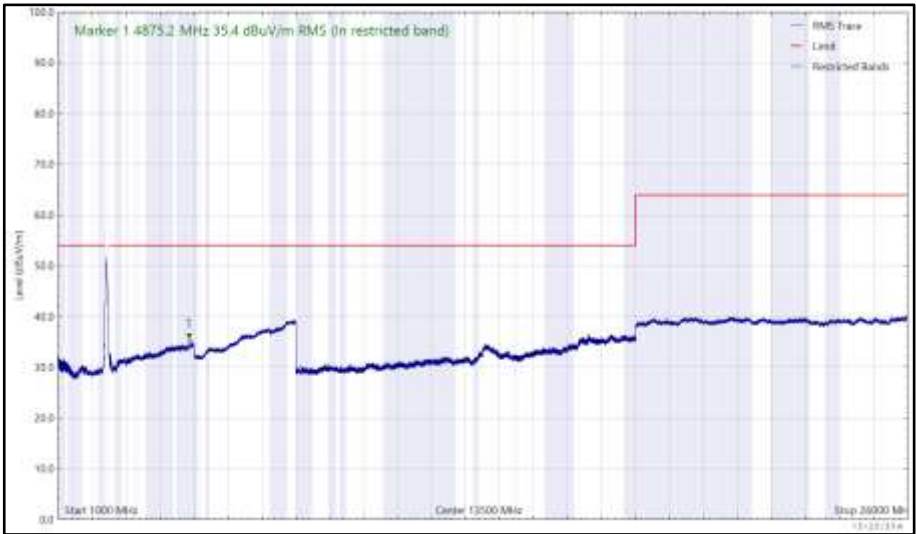


Figure 111 - 2437 MHz (CH6), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical (RMS)

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
4945.226	37.5	54.0	-16.5	RMS	18	107	Vertical

Table 53 - 2472 MHz (CH13), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz

No other emissions found within 10 dB of the limit.

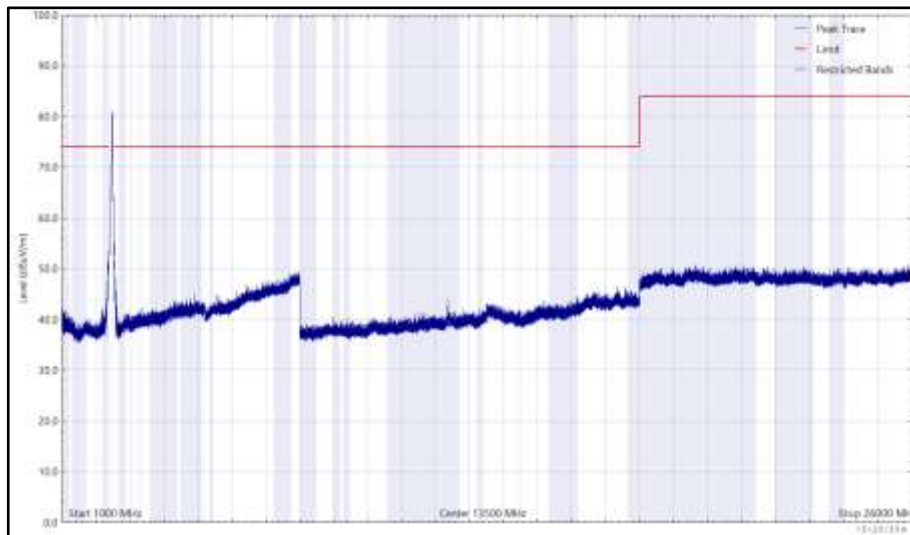


Figure 112 - 2472 MHz (CH13), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal (Peak)

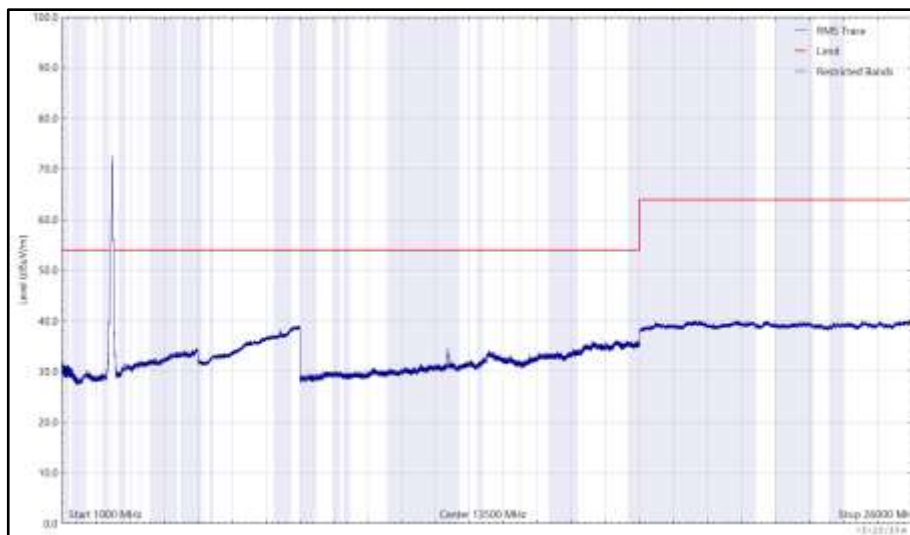


Figure 113 - 2472 MHz (CH13), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal (RMS)

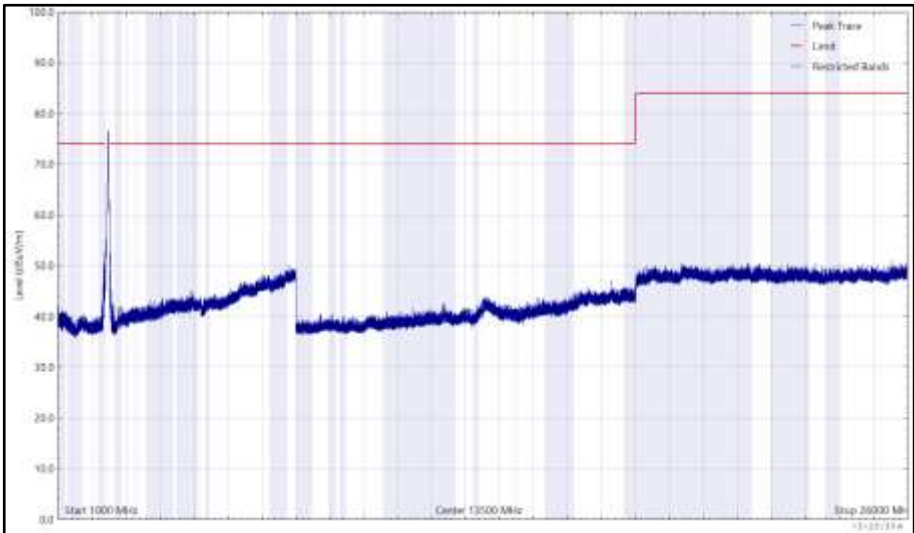


Figure 114 - 2472 MHz (CH13), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical (Peak)

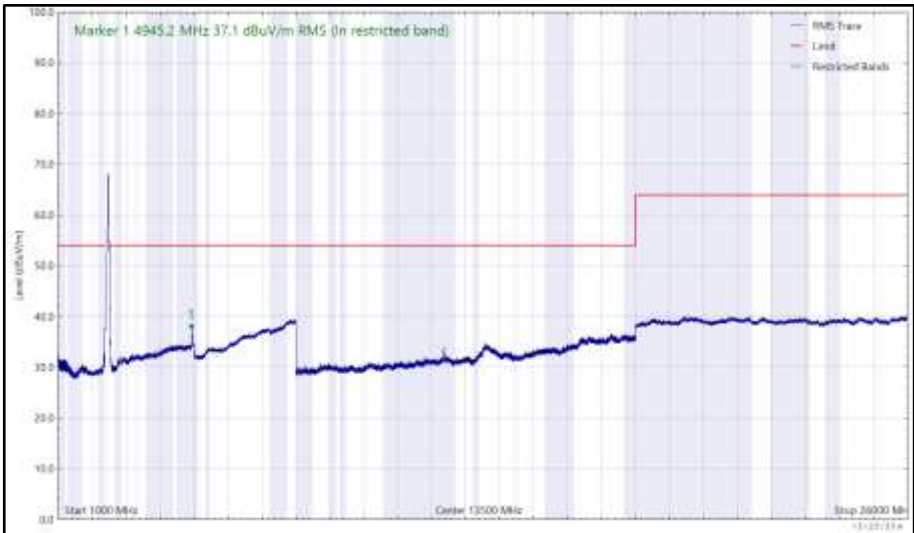


Figure 115 - 2472 MHz (CH13), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical (RMS)



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 54 - 2412 MHz (CH1), 802.11g, Core 0, 1 GHz to 26 GHz

*No emissions found within 10 dB of the limit.

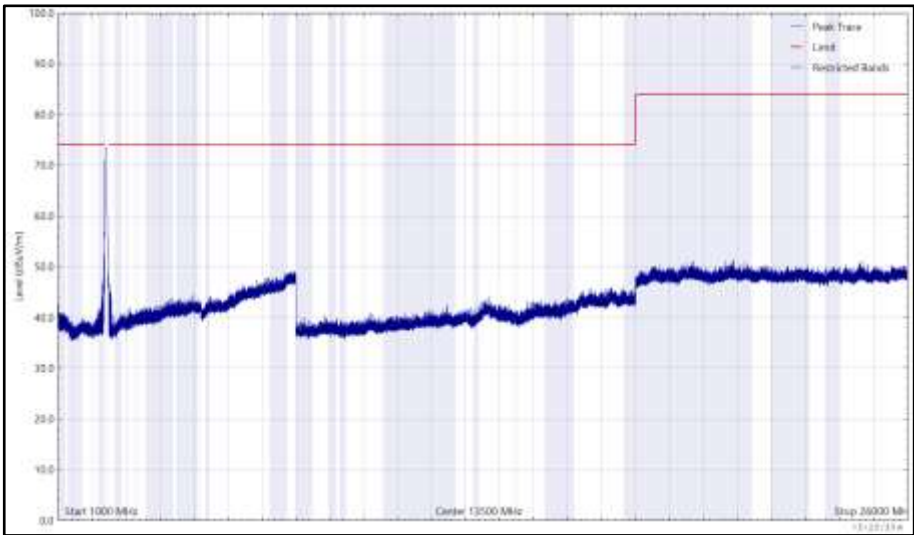


Figure 116 - 2412 MHz (CH1), 802.11g, Core 0, 1 GHz to 26 GHz, Horizontal (Peak)

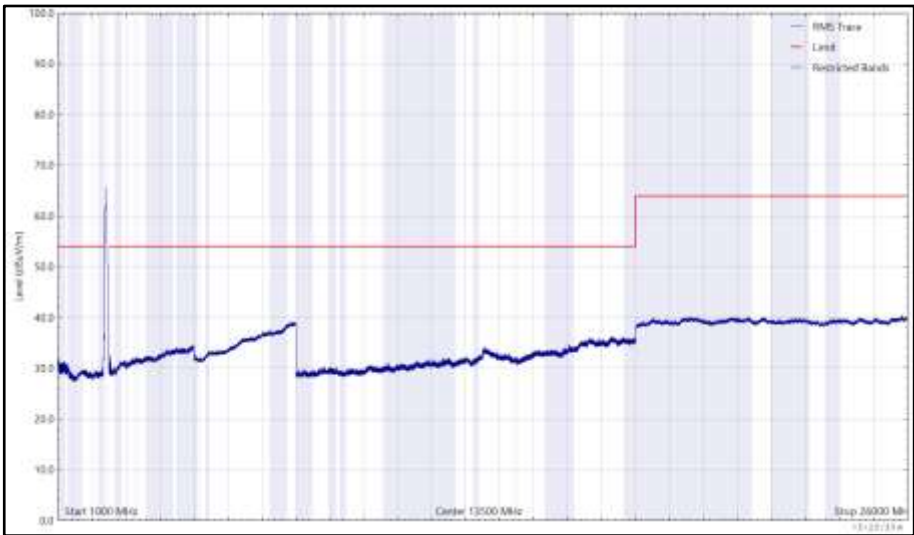


Figure 117 - 2412 MHz (CH1), 802.11g, Core 0, 1 GHz to 26 GHz, Horizontal (RMS)

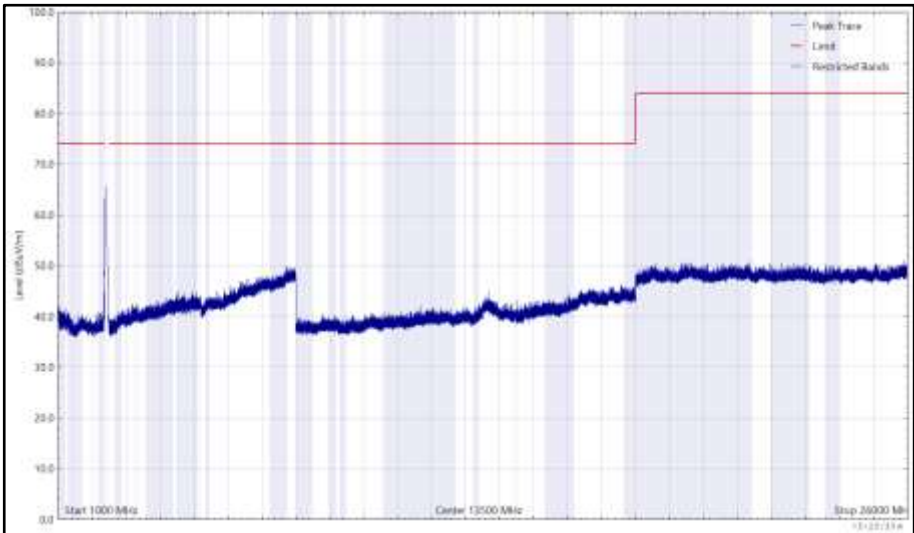


Figure 118 - 2412 MHz (CH1), 802.11g, Core 0, 1 GHz to 26 GHz, Vertical (Peak)

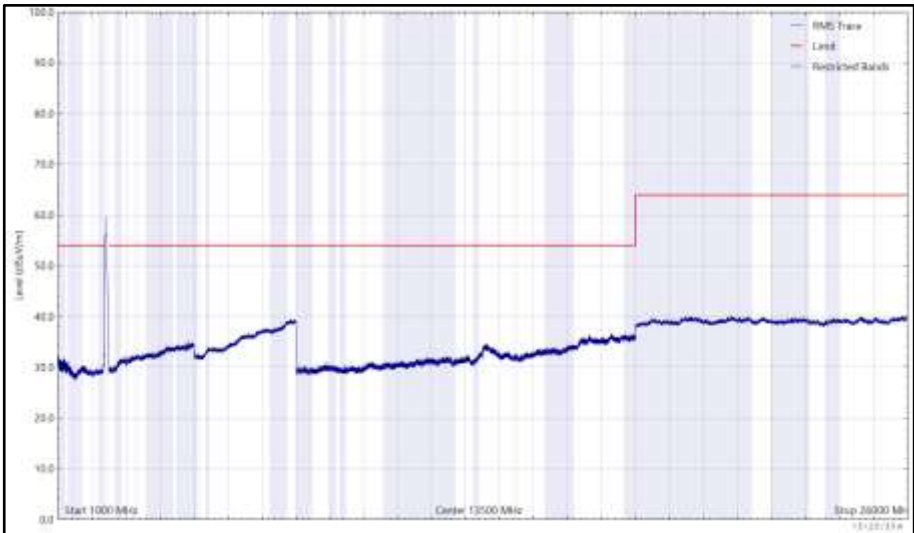


Figure 119 - 2412 MHz (CH1), 802.11g, Core 0, 1 GHz to 26 GHz, Vertical (RMS)

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
4874.204	35.6	54.0	-18.4	RMS	356	132	Vertical

Table 55 - 2437 MHz (CH6), 802.11g, Core 0, 30 MHz to 26 GHz

No other emissions found within 10 dB of the limit.

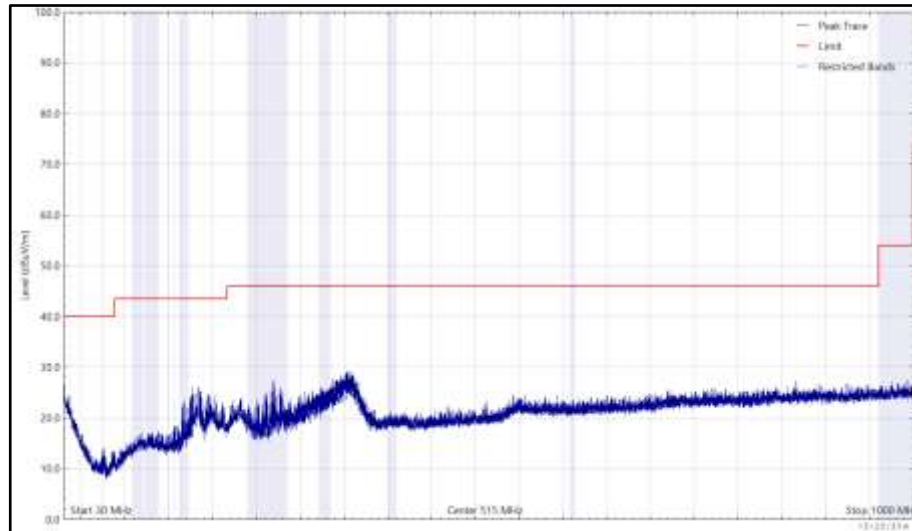


Figure 120 - 2437 MHz (CH6), 802.11g, Core 0, 30 MHz to 1 GHz, Horizontal (Peak)

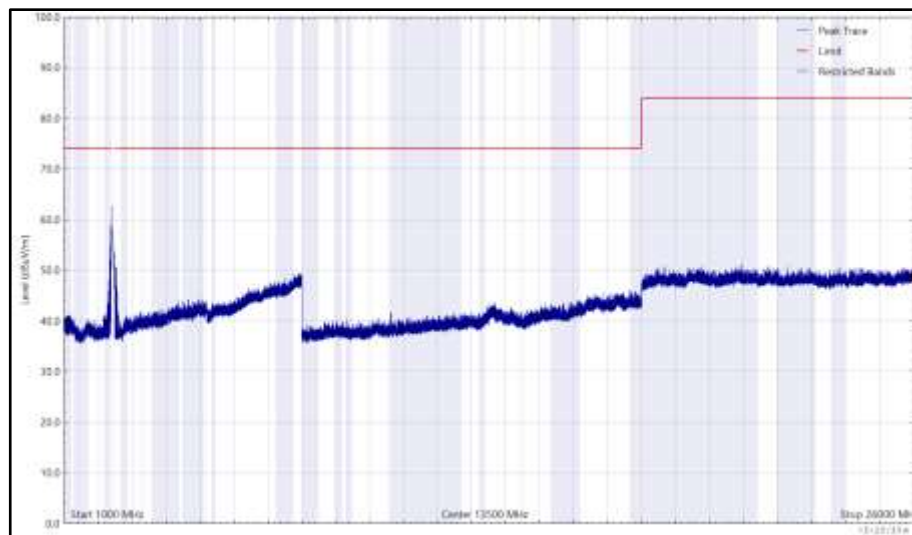


Figure 121 - 2437 MHz (CH6), 802.11g, Core 0, 1 GHz to 26 GHz, Horizontal (Peak)

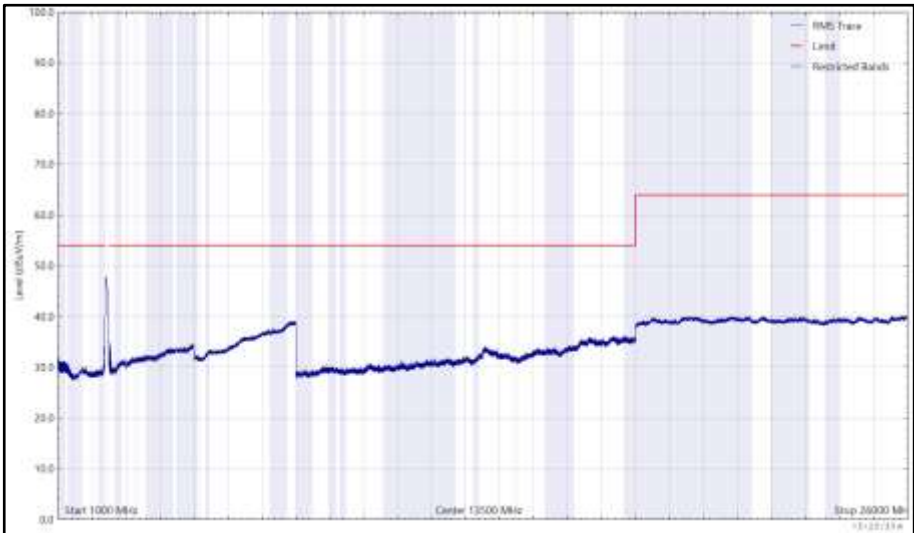


Figure 122 - 2437 MHz (CH6), 802.11g, Core 0, 1 GHz to 26 GHz, Horizontal (RMS)

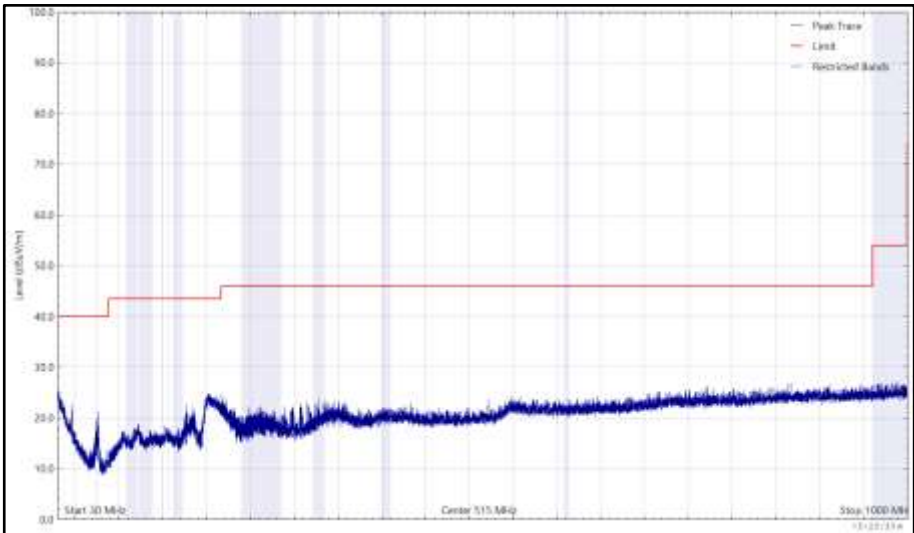


Figure 123 - 2437 MHz (CH6), 802.11g, Core 0, 30 MHz to 1 GHz, Vertical (Peak)

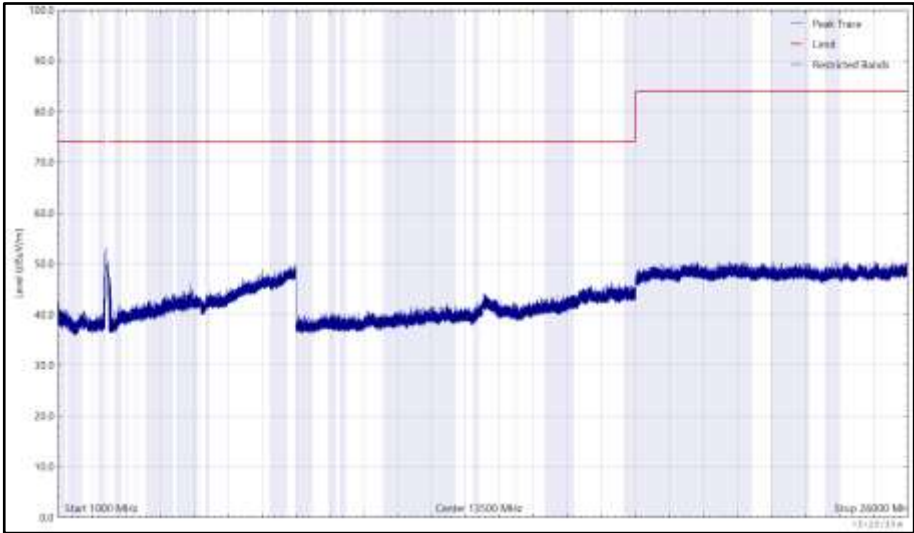


Figure 124 - 2437 MHz (CH6), 802.11g, Core 0, 1 GHz to 26 GHz, Vertical (Peak)

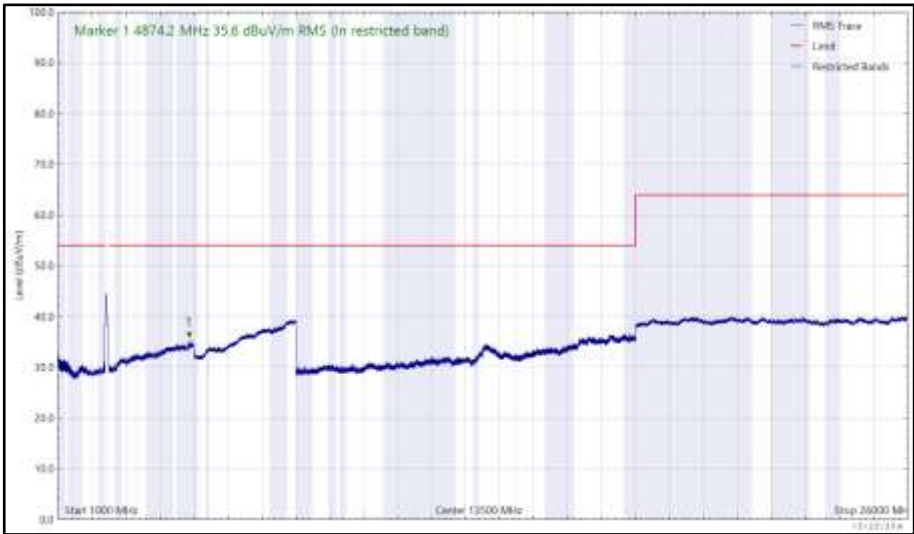


Figure 125 - 2437 MHz (CH6), 802.11g, Core 0, 1 GHz to 26 GHz, Vertical (RMS)

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
4945.619	38.2	54.0	-15.8	RMS	12	117	Vertical

Table 56 - 2472 MHz (CH13), 802.11g, Core 0, 1 GHz to 26 GHz

No other emissions found within 10 dB of the limit.

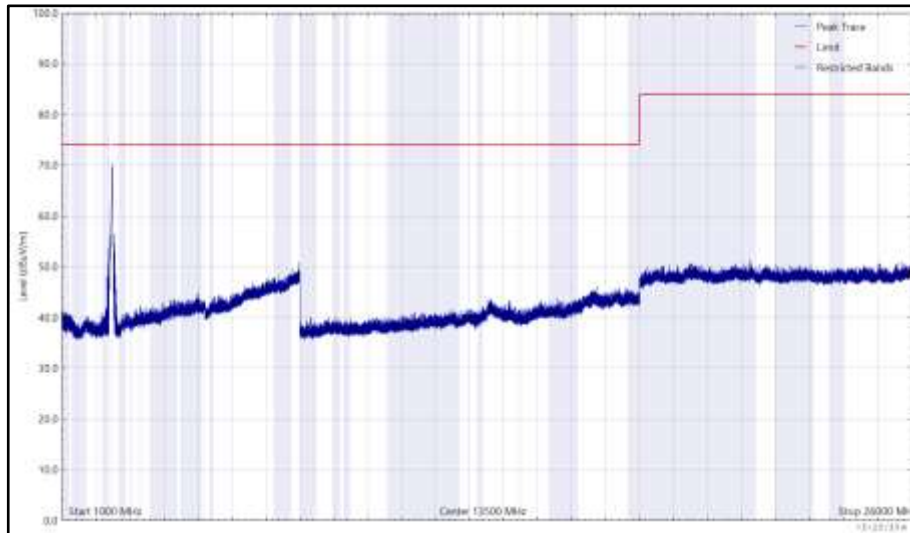


Figure 126 - 2472 MHz (CH13), 802.11g, Core 0, 1 GHz to 26 GHz, Horizontal (Peak)

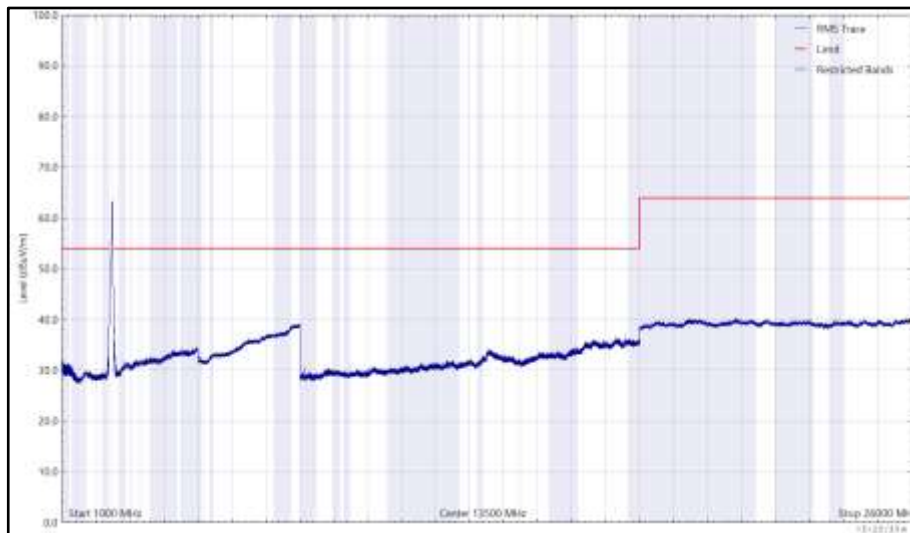


Figure 127 - 2472 MHz (CH13), 802.11g, Core 0, 1 GHz to 26 GHz, Horizontal (RMS)

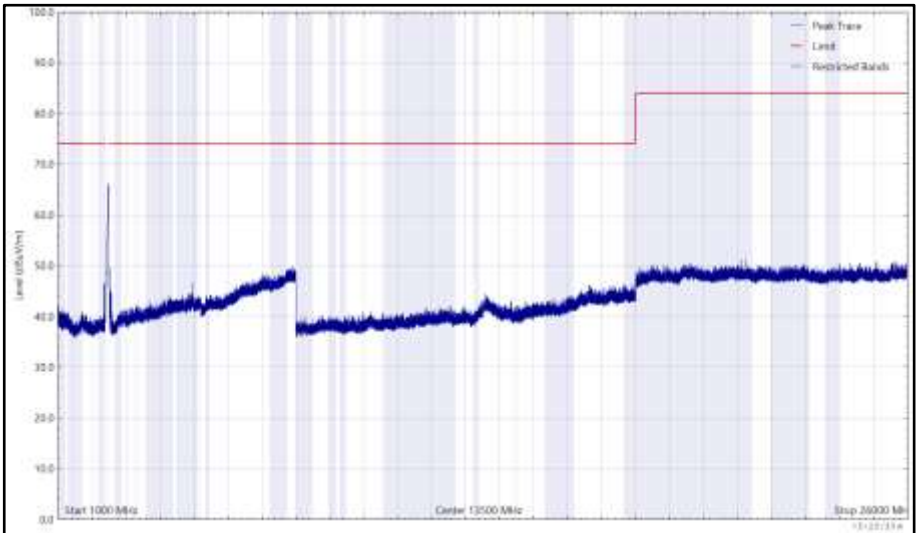


Figure 128 - 2472 MHz (CH13), 802.11g, Core 0, 1 GHz to 26 GHz, Vertical (Peak)

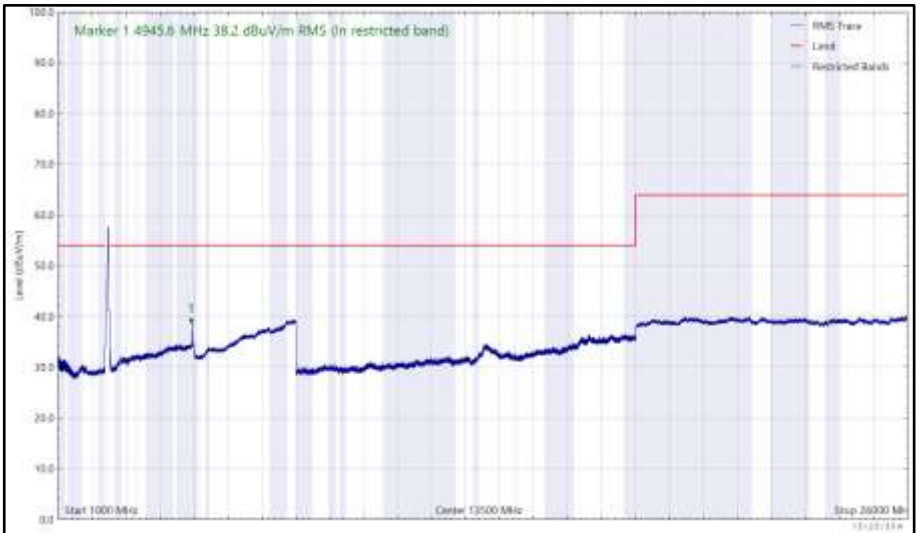


Figure 129 - 2472 MHz (CH13), 802.11g, Core 0, 1 GHz to 26 GHz, Vertical (RMS)



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 57 - 2412 MHz (CH1), 802.11g, Core 1, 1 GHz to 26 GHz

*No emissions found within 10 dB of the limit.

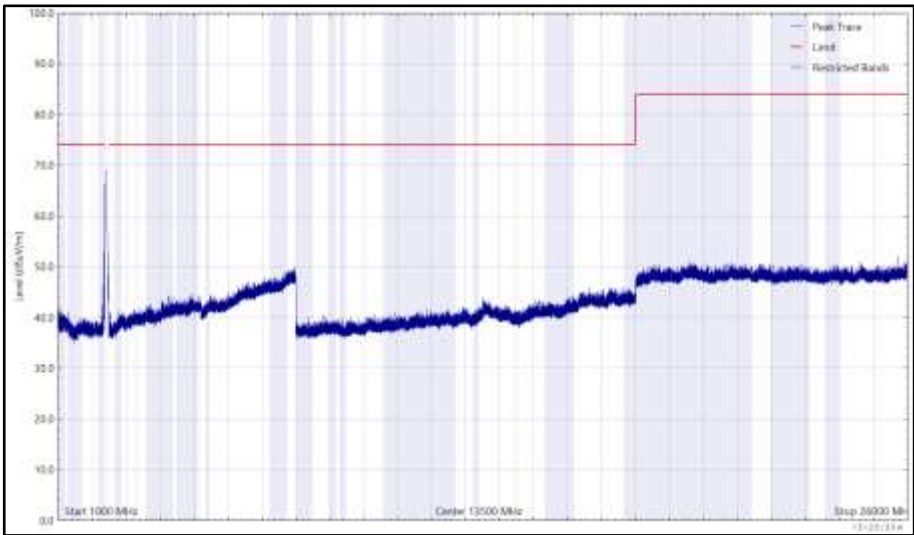


Figure 130 - 2412 MHz (CH1), 802.11g, Core 1, 1 GHz to 26 GHz, Horizontal (Peak)

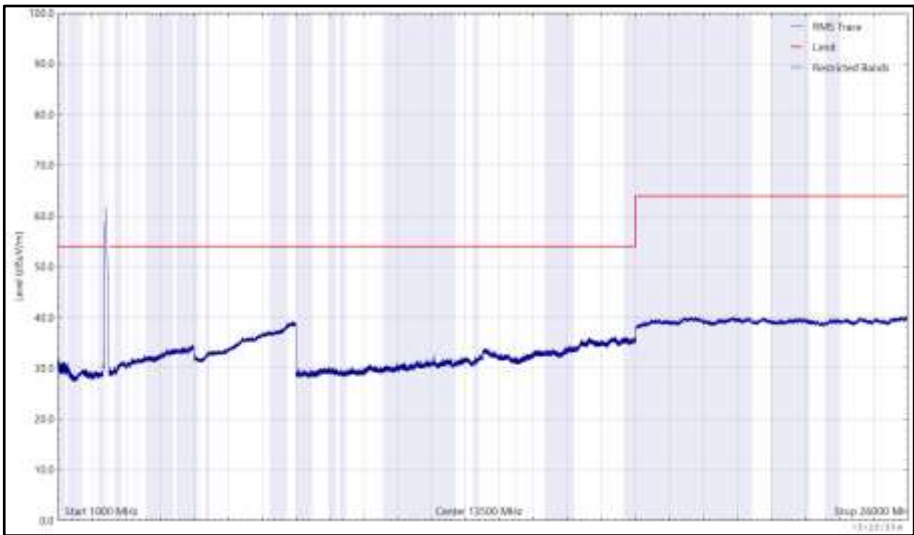


Figure 131 - 2412 MHz (CH1), 802.11g, Core 1, 1 GHz to 26 GHz, Horizontal (RMS)

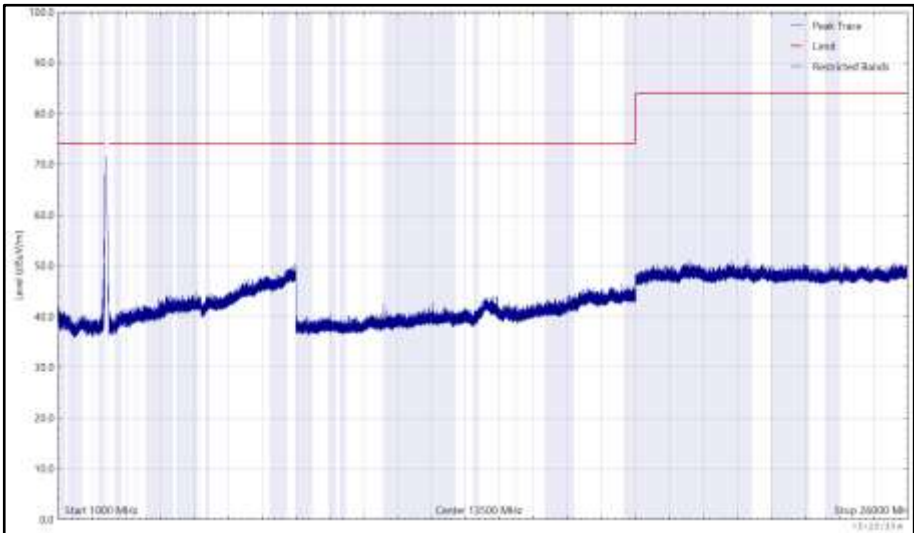


Figure 132 - 2412 MHz (CH1), 802.11g, Core 1, 1 GHz to 26 GHz, Vertical (Peak)

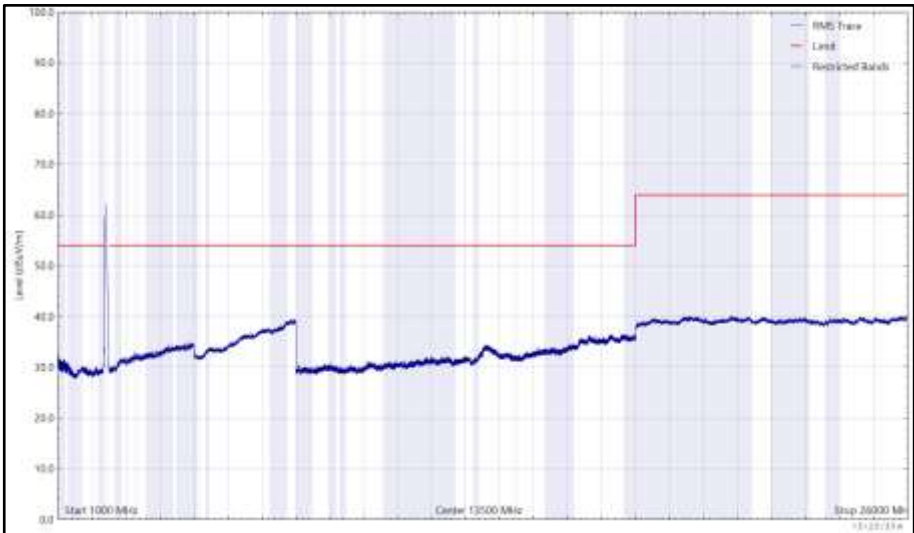


Figure 133 - 2412 MHz (CH1), 802.11g, Core 1, 1 GHz to 26 GHz, Vertical (RMS)



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 58 - 2437 MHz (CH6), 802.11g, Core 1, 30 MHz to 26 GHz

*No emissions found within 10 dB of the limit.

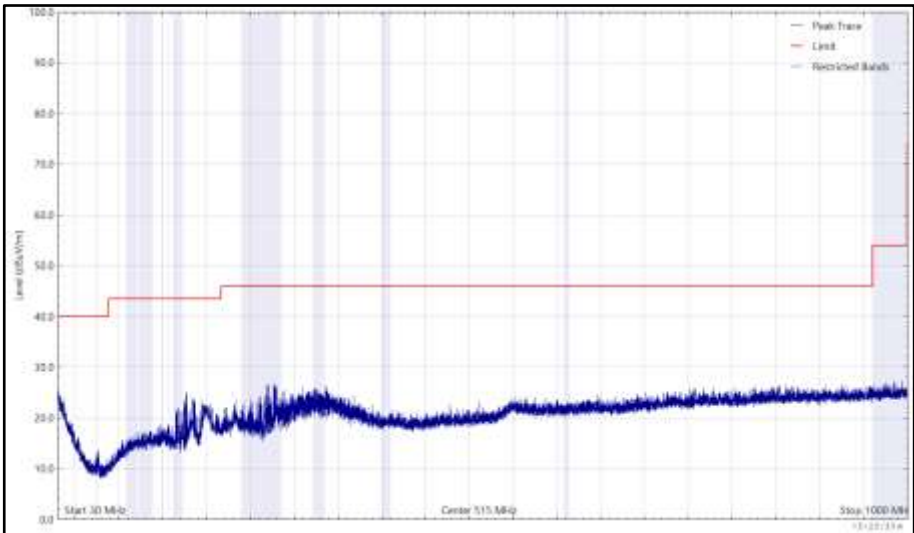


Figure 134 - 2437 MHz (CH6), 802.11g, Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

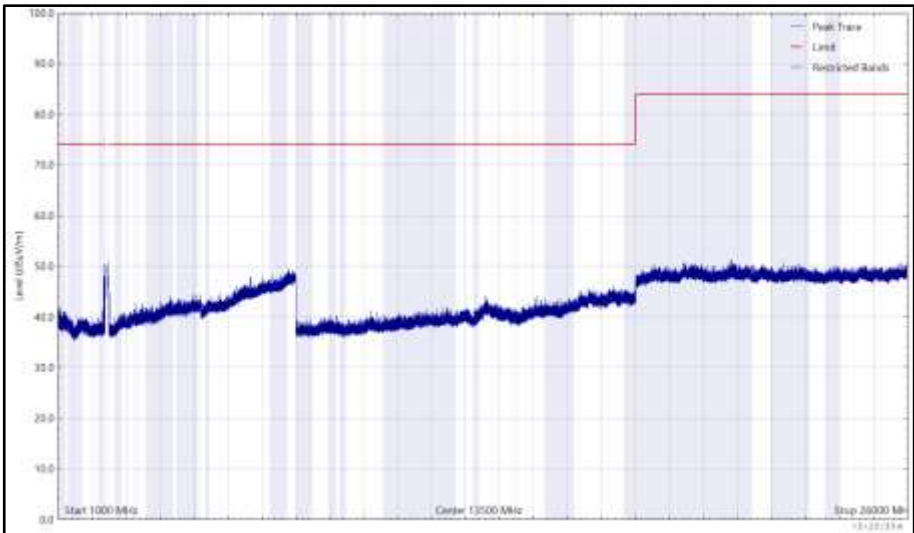


Figure 135 - 2437 MHz (CH6), 802.11g, Core 1, 1 GHz to 26 GHz, Horizontal (Peak)

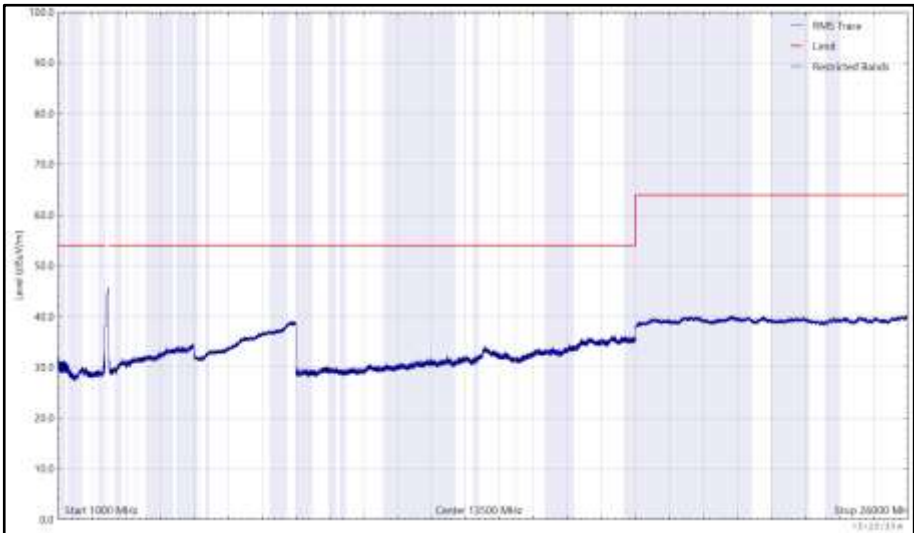


Figure 136 - 2437 MHz (CH6), 802.11g, Core 1, 1 GHz to 26 GHz, Horizontal (RMS)

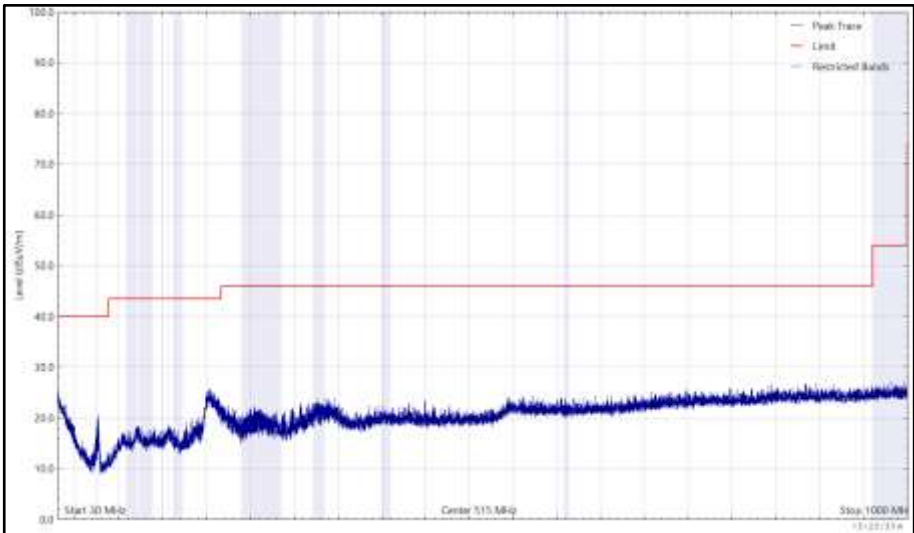


Figure 137 - 2437 MHz (CH6), 802.11g, Core 1, 30 MHz to 1 GHz, Vertical (Peak)

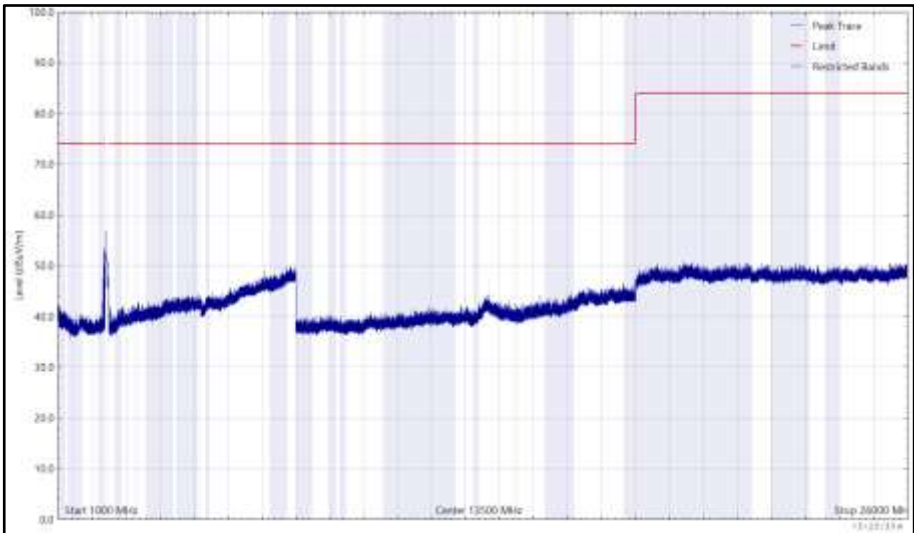


Figure 138 - 2437 MHz (CH6), 802.11g, Core 1, 1 GHz to 26 GHz, Vertical (Peak)

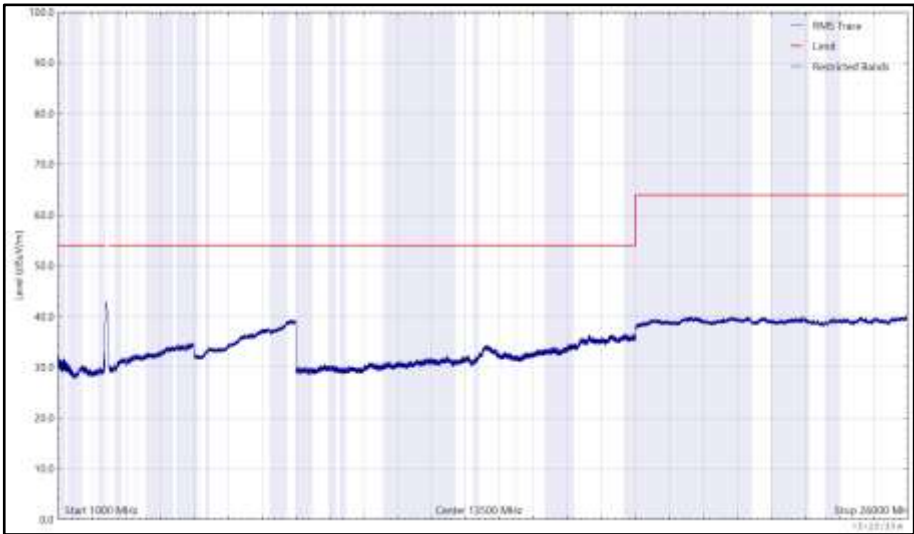


Figure 139 - 2437 MHz (CH6), 802.11g, Core 1, 1 GHz to 26 GHz, Vertical (RMS)



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 59 - 2472 MHz (CH13), 802.11g, Core 1, 1 GHz to 26 GHz

*No emissions found within 10 dB of the limit.

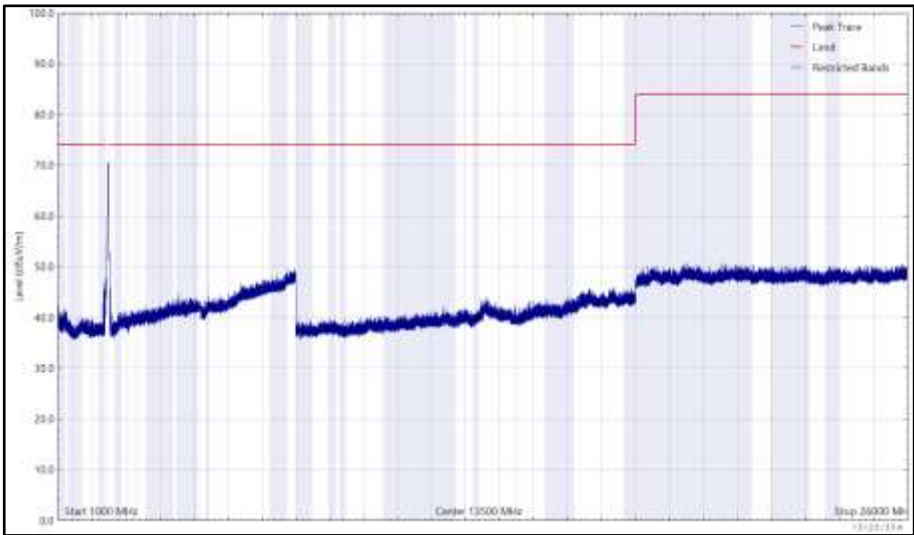


Figure 140 - 2472 MHz (CH13), 802.11g, Core 1, 1 GHz to 26 GHz, Horizontal (Peak)

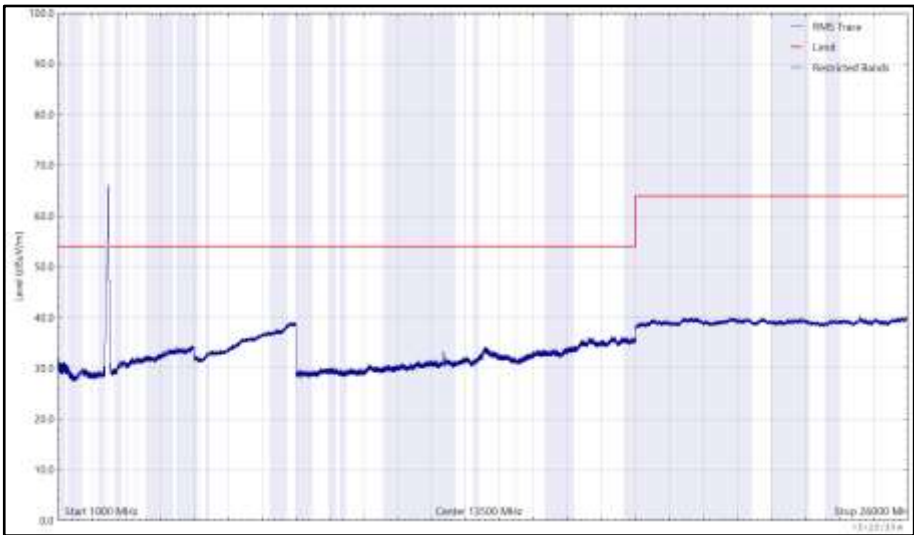


Figure 141 - 2472 MHz (CH13), 802.11g, Core 1, 1 GHz to 26 GHz, Horizontal (RMS)

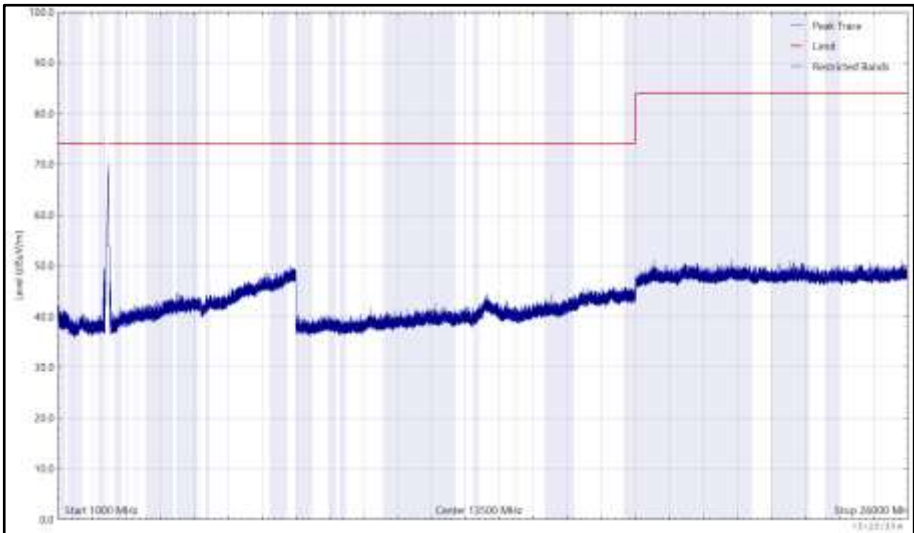


Figure 142 - 2472 MHz (CH13), 802.11g, Core 1, 1 GHz to 26 GHz, Vertical (Peak)

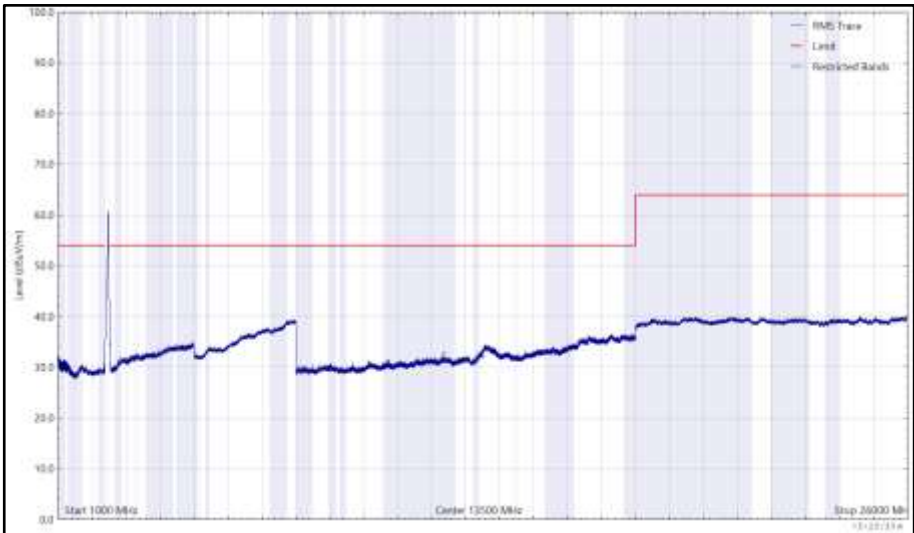


Figure 143 - 2472 MHz (CH13), 802.11g, Core 1, 1 GHz to 26 GHz, Vertical (RMS)

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
4823.960	39.6	54.0	-14.4	Peak	10	221	Vertical

Table 60 - 2412 MHz (CH1), 802.11b, Core 0, 1 GHz to 26 GHz

No other emissions found within 10 dB of the limit.

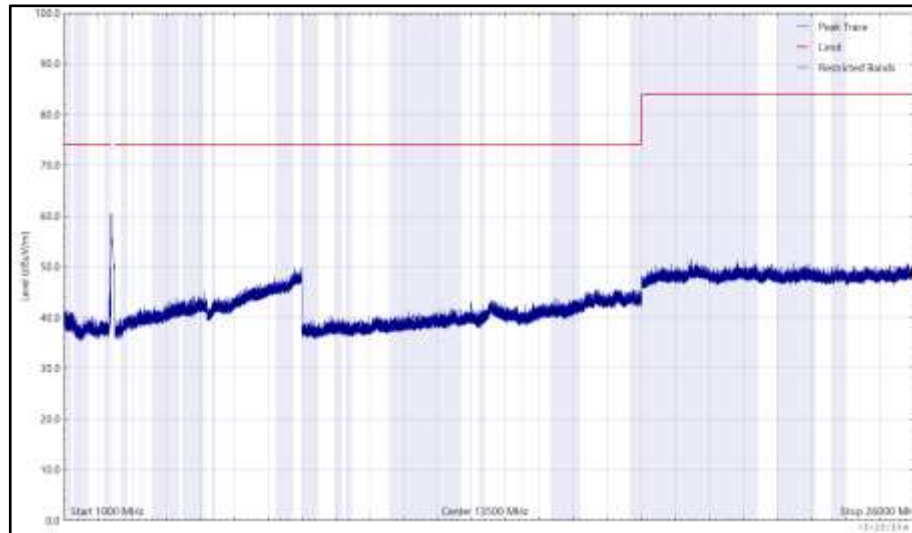


Figure 144 - 2412 MHz (CH1), 802.11b, Core 0, 1 GHz to 26 GHz, Horizontal (Peak)

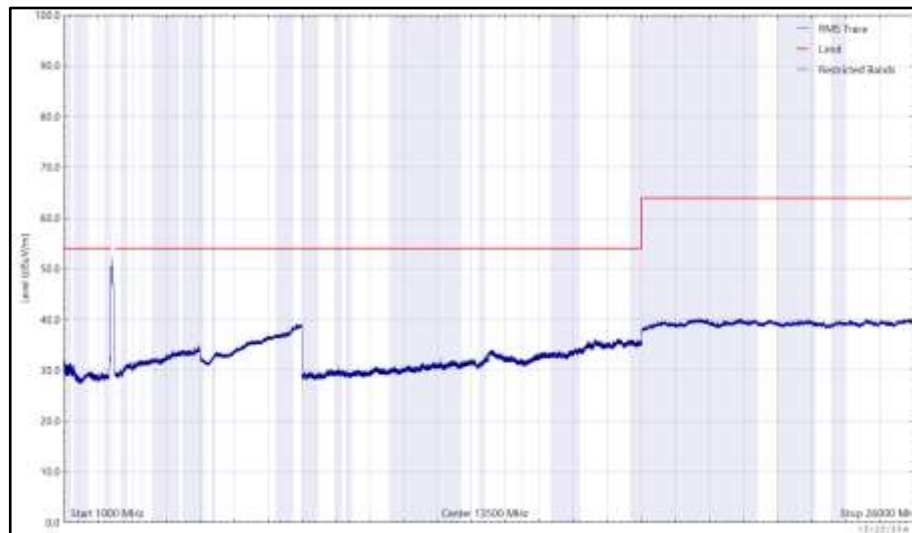


Figure 145 - 2412 MHz (CH1), 802.11b, Core 0, 1 GHz to 26 GHz, Horizontal (RMS)

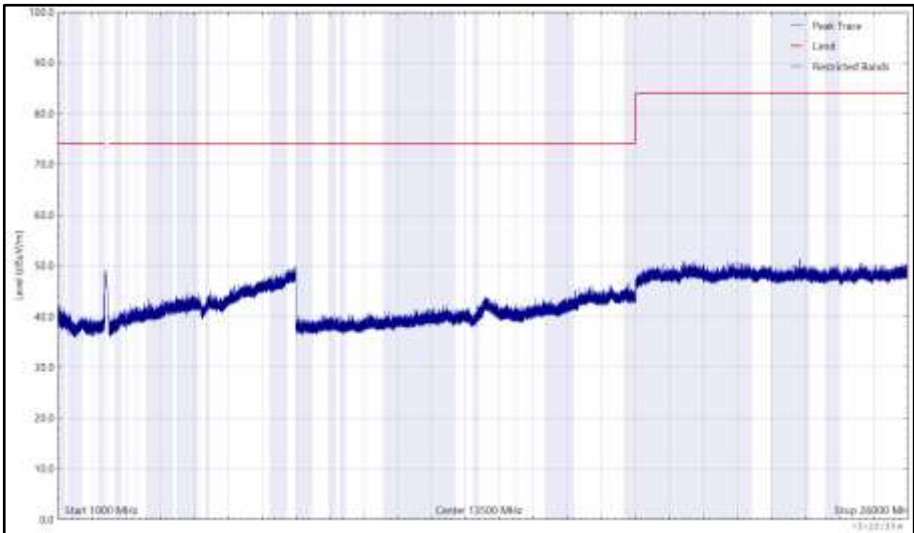


Figure 146 - 2412 MHz (CH1), 802.11b, Core 0, 1 GHz to 26 GHz, Vertical (Peak)

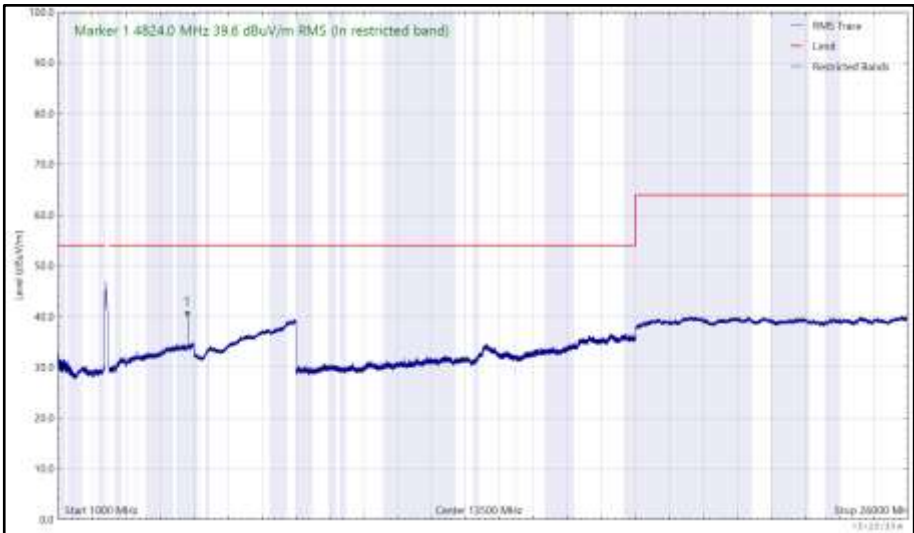


Figure 147 - 2412 MHz (CH1), 802.11b, Core 0, 1 GHz to 26 GHz, Vertical (RMS)

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
4873.950	35.7	54.0	-18.3	RMS	346	139	Horizontal
4874.050	43.6	54.0	-10.4	RMS	23	105	Vertical

Table 61 - 2437 MHz (CH6), 802.11b, Core 0, 30 MHz to 26 GHz

No other emissions found within 10 dB of the limit.

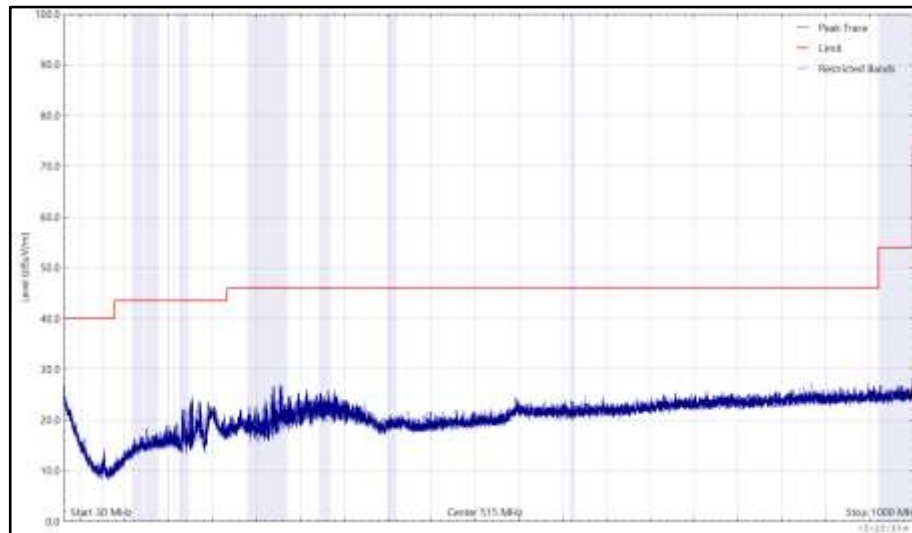


Figure 148 - 2437 MHz (CH6), 802.11b, Core 0, 30 MHz to 1 GHz, Horizontal (Peak)

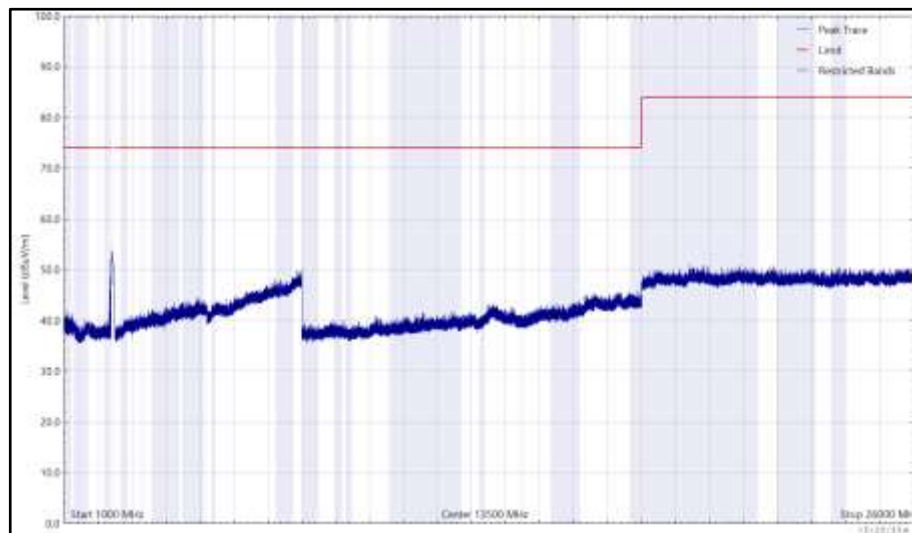


Figure 149 - 2437 MHz (CH6), 802.11b, Core 0, 1 GHz to 26 GHz, Horizontal (Peak)

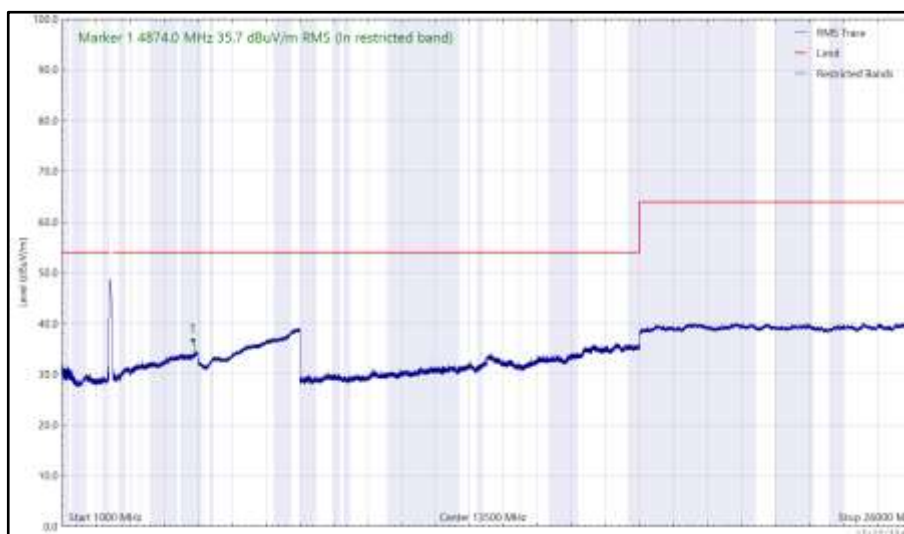


Figure 150 - 2437 MHz (CH6), 802.11b, Core 0, 1 GHz to 26 GHz, Horizontal (RMS)

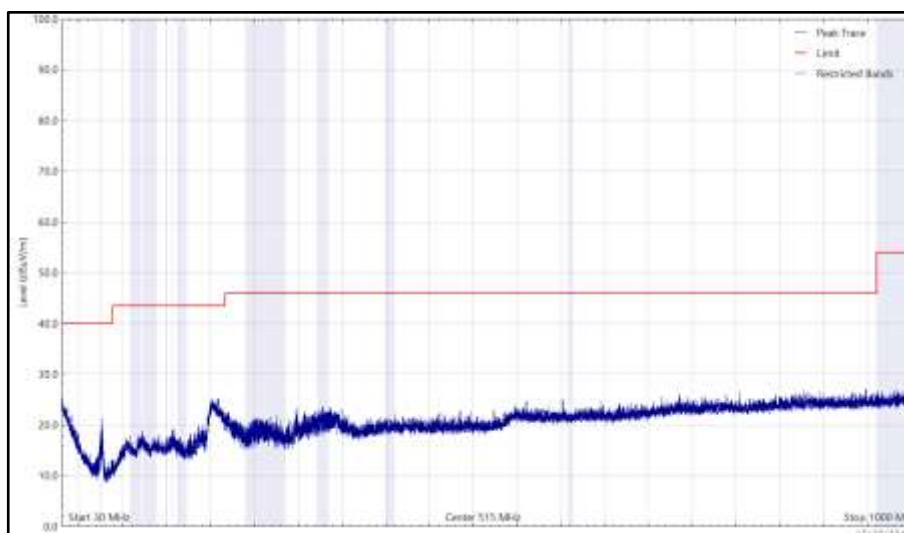


Figure 151 - 2437 MHz (CH6), 802.11b, Core 0, 30 MHz to 1 GHz, Vertical (Peak)

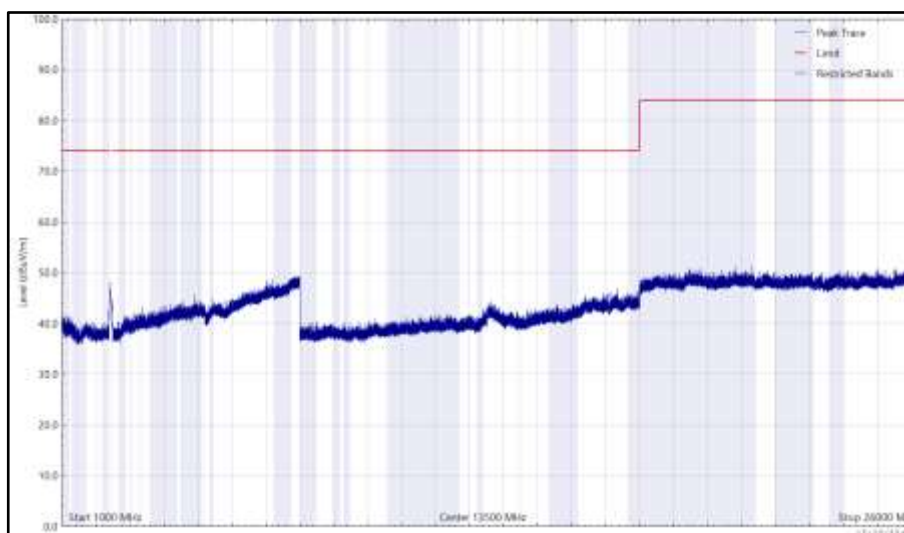


Figure 152 - 2437 MHz (CH6), 802.11b, Core 0, 1 GHz to 26 GHz, Vertical (Peak)

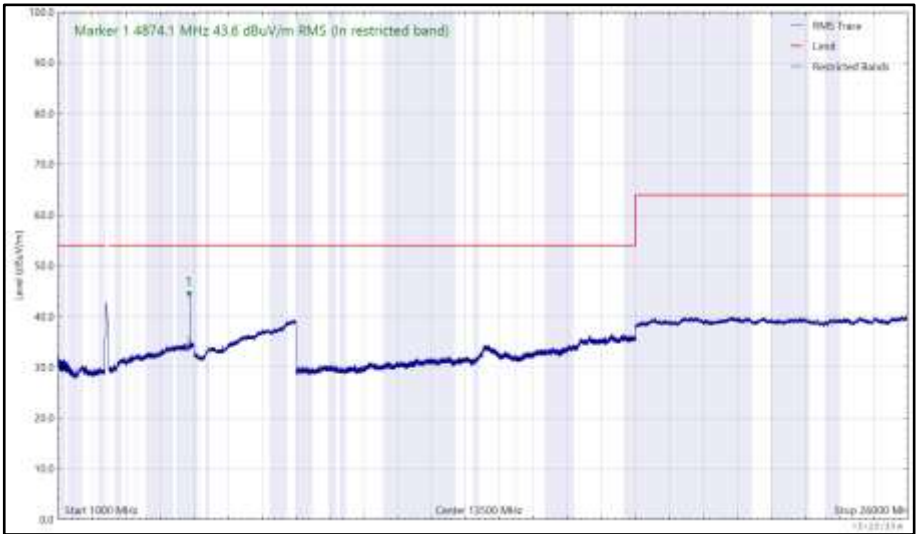


Figure 153 - 2437 MHz (CH6), 802.11b, Core 0, 1 GHz to 26 GHz, Vertical (RMS)

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
4943.939	35.9	54.0	-18.1	RMS	5	102	Horizontal
4943.974	46.4	54.0	-7.6	RMS	19	100	Vertical

Table 62 - 2472 MHz (CH13), 802.11b, Core 0, 1 GHz to 26 GHz

No other emissions found within 10 dB of the limit.

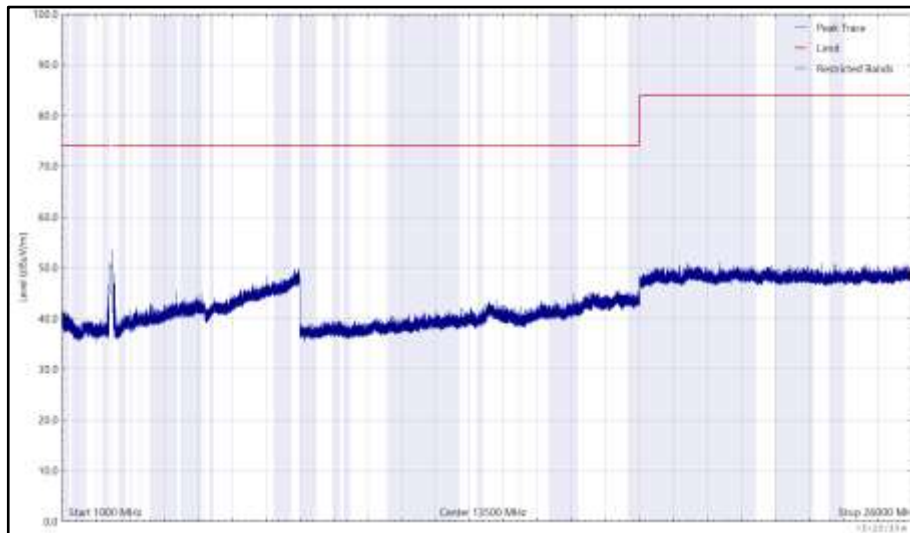


Figure 154 - 2472 MHz (CH13), 802.11b, Core 0, 1 GHz to 26 GHz, Horizontal (Peak)

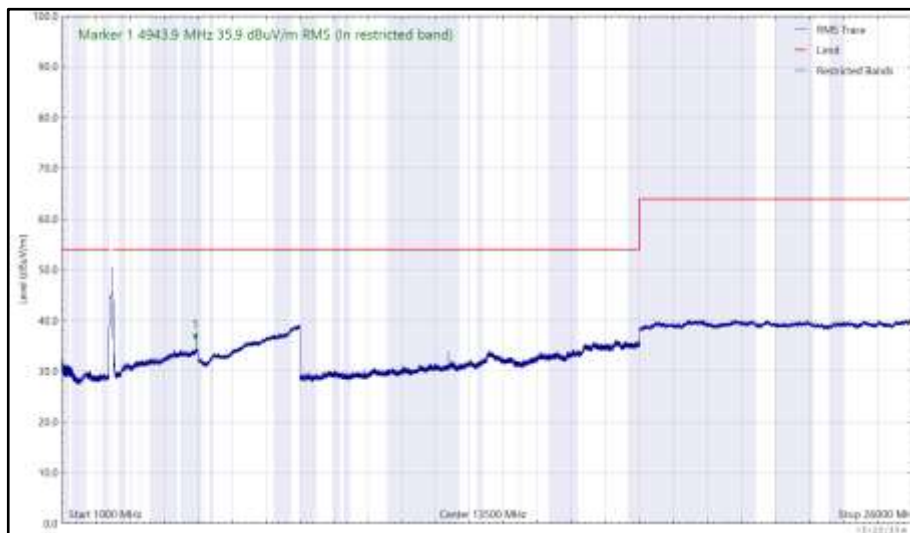


Figure 155 - 2472 MHz (CH13), 802.11b, Core 0, 1 GHz to 26 GHz, Horizontal (RMS)

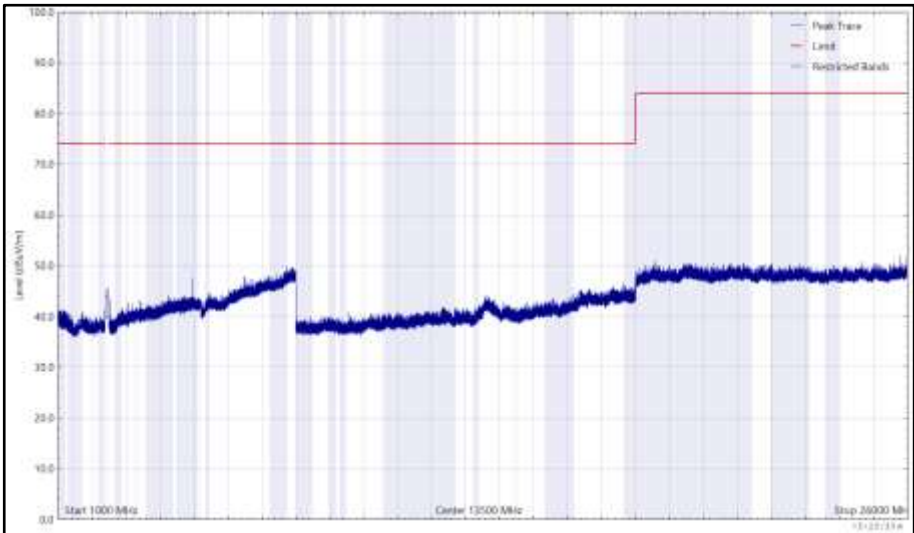


Figure 156 - 2472 MHz (CH13), 802.11b, Core 0, 1 GHz to 26 GHz, Vertical (Peak)

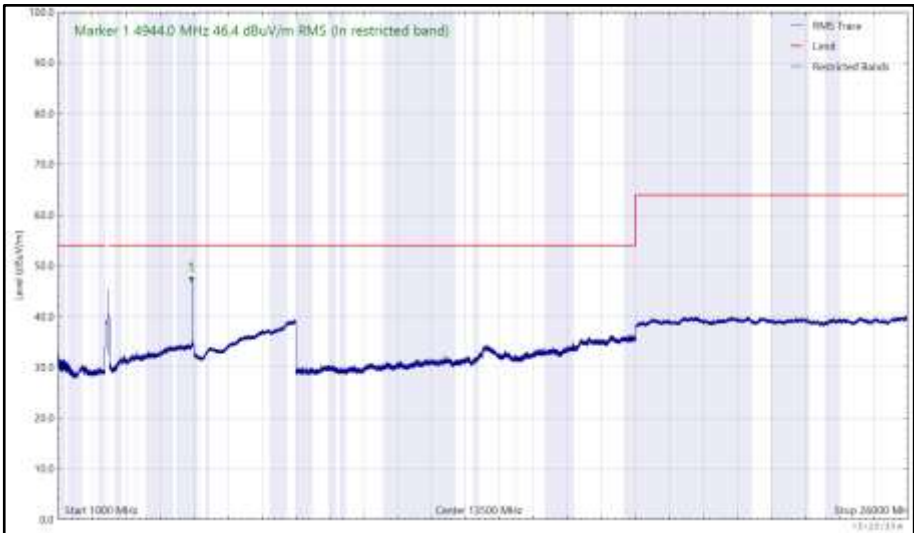


Figure 157 - 2472 MHz (CH13), 802.11b, Core 0, 1 GHz to 26 GHz, Vertical (RMS)

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
4823.966	36.6	54.0	-17.4	RMS	179	149	Horizontal

Table 63 - 2412 MHz (CH1), 802.11b, Core 1, 1 GHz to 26 GHz

No other emissions found within 10 dB of the limit.

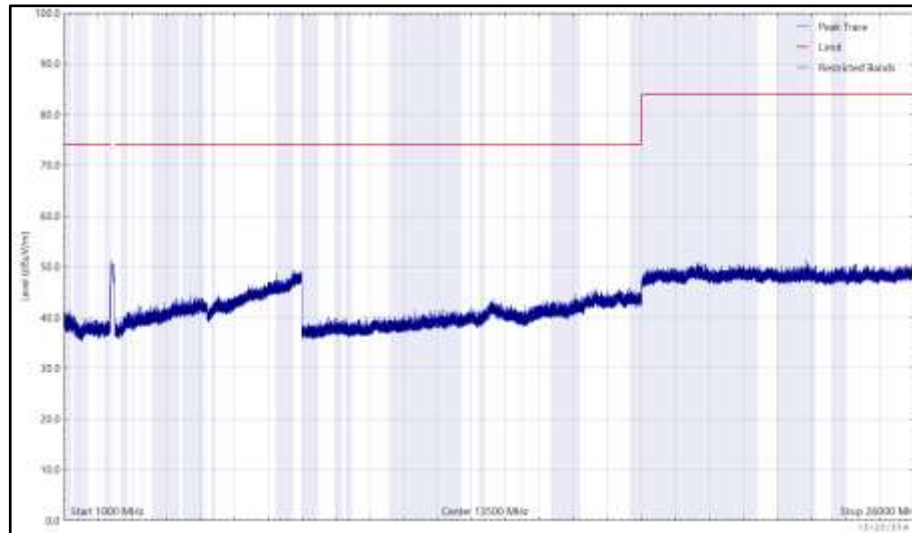


Figure 158 - 2412 MHz (CH1), 802.11b, Core 1, 1 GHz to 26 GHz, Horizontal (Peak)

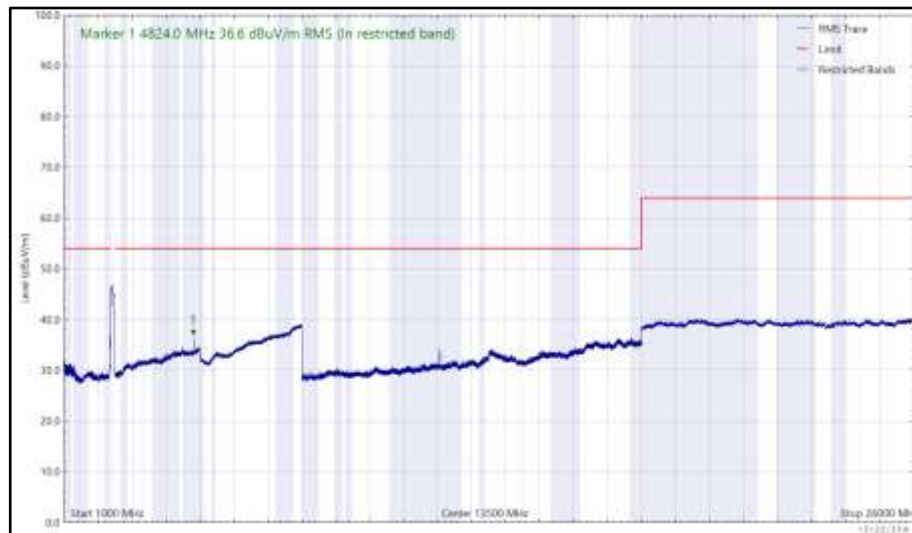


Figure 159 - 2412 MHz (CH1), 802.11b, Core 1, 1 GHz to 26 GHz, Horizontal (RMS)

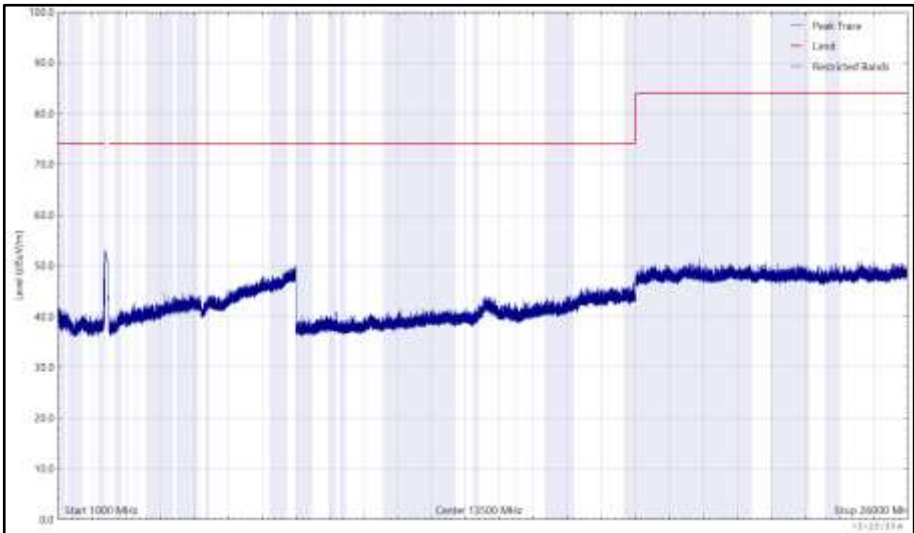


Figure 160 - 2412 MHz (CH1), 802.11b, Core 1, 1 GHz to 26 GHz, Vertical (Peak)

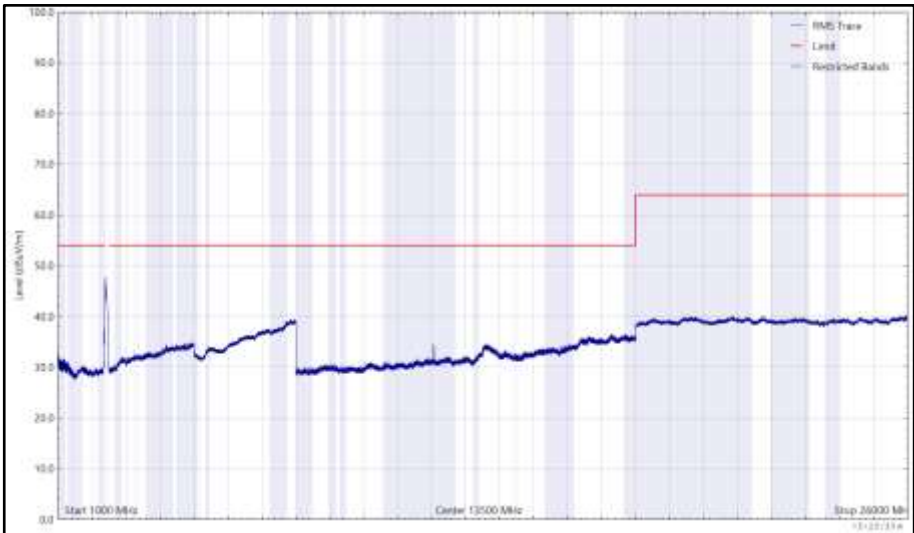


Figure 161 - 2412 MHz (CH1), 802.11b, Core 1, 1 GHz to 26 GHz, Vertical (RMS)

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
12185.973	34.1	54.0	-19.9	RMS	199	260	Horizontal

Table 64 - 2437 MHz (CH6), 802.11b, Core 1, 30 MHz to 26 GHz

No other emissions found within 10 dB of the limit.

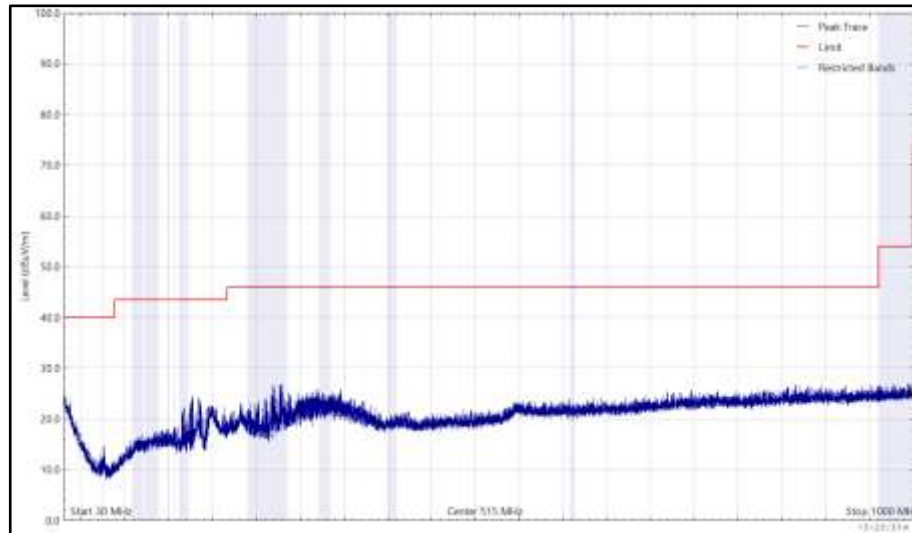


Figure 162 - 2437 MHz (CH6), 802.11b, Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

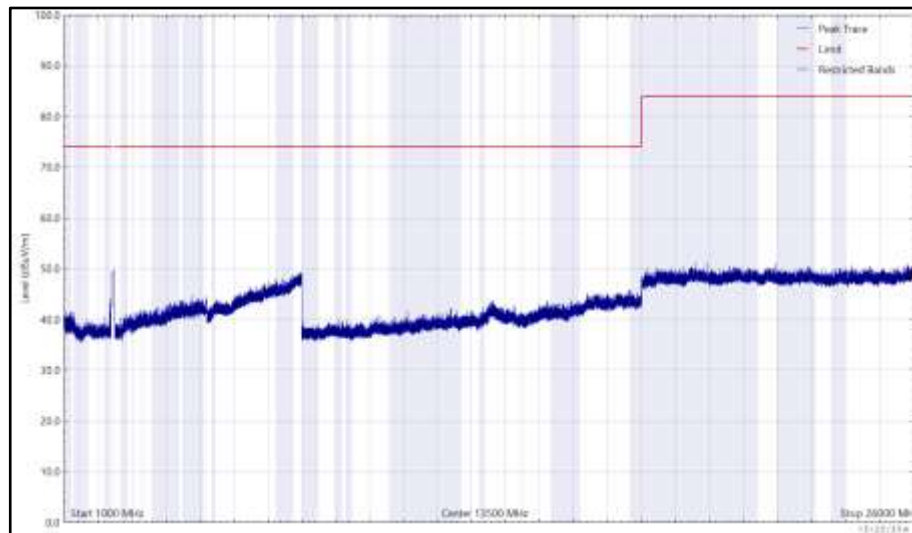


Figure 163 - 2437 MHz (CH6), 802.11b, Core 1, 1 GHz to 26 GHz, Horizontal (Peak)

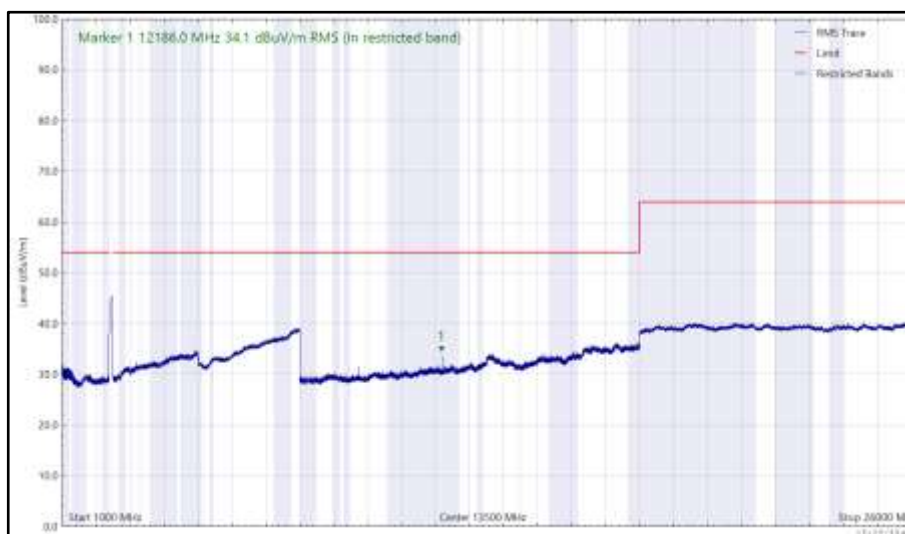


Figure 164 - 2437 MHz (CH6), 802.11b, Core 1, 1 GHz to 26 GHz, Horizontal (RMS)



Figure 165 - 2437 MHz (CH6), 802.11b, Core 1, 30 MHz to 1 GHz, Vertical (Peak)

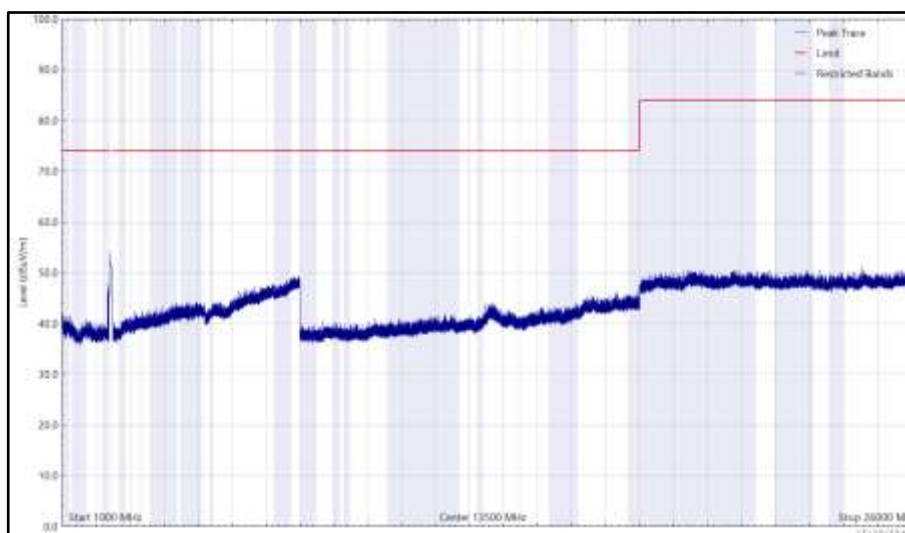


Figure 166 - 2437 MHz (CH6), 802.11b, Core 1, 1 GHz to 26 GHz, Vertical (Peak)

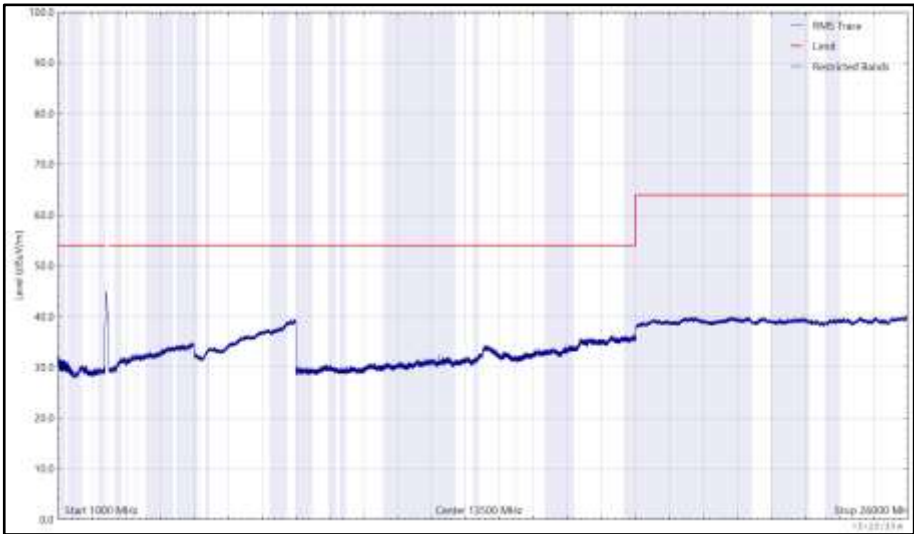


Figure 167 - 2437 MHz (CH6), 802.11b, Core 1, 1 GHz to 26 GHz, Vertical (RMS)



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
12359.132	37.0	54.0	-17.0	RMS	165	100	Horizontal

Table 65 - 2472 MHz (CH13), 802.11b, Core 1, 1 GHz to 26 GHz

No other emissions found within 10 dB of the limit.

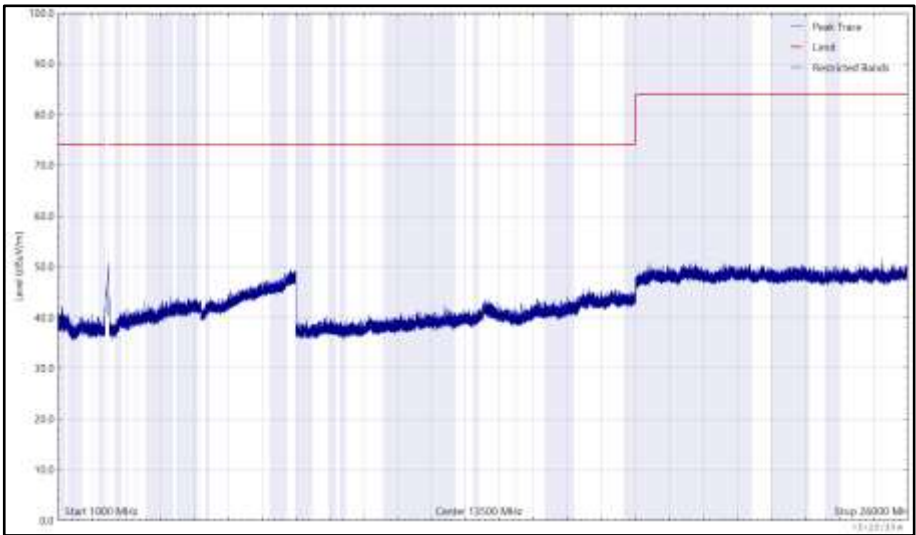


Figure 168 - 2472 MHz (CH13), 802.11b, Core 1, 1 GHz to 26 GHz, Horizontal (Peak)

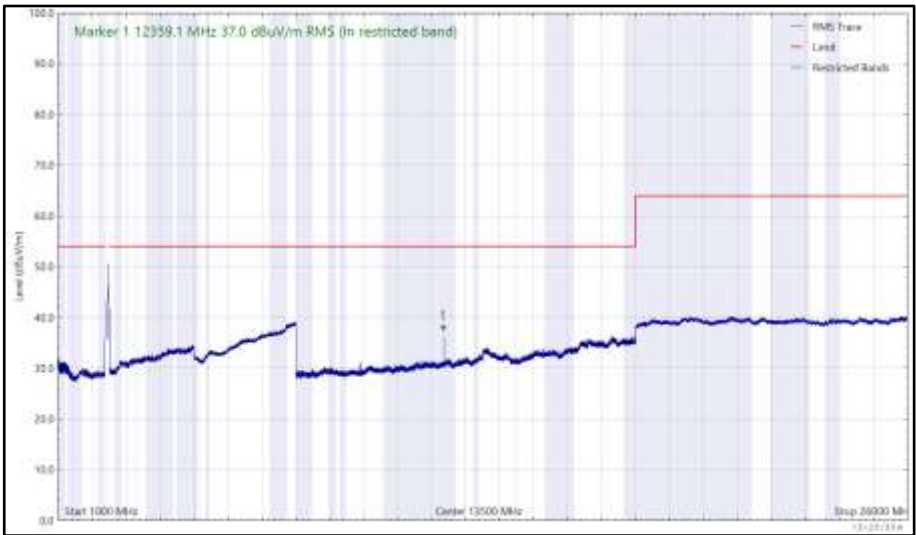


Figure 169 - 2472 MHz (CH13), 802.11b, Core 1, 1 GHz to 26 GHz, Horizontal (RMS)

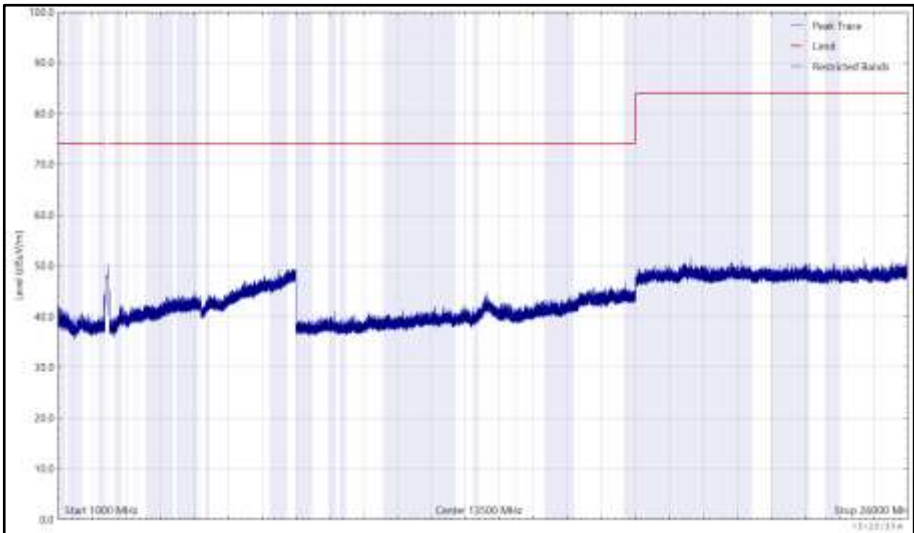


Figure 170 - 2472 MHz (CH13), 802.11b, Core 1, 1 GHz to 26 GHz, Vertical (Peak)

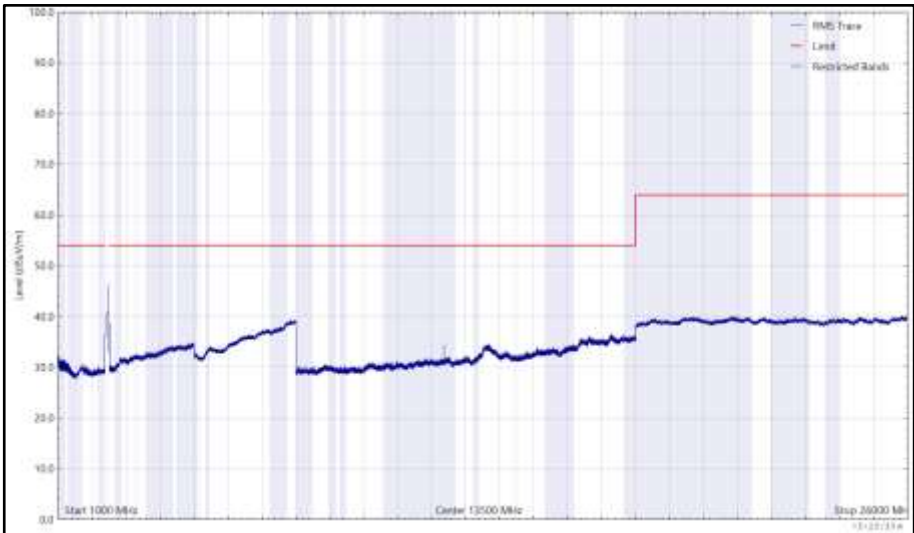


Figure 171 - 2472 MHz (CH13), 802.11b, Core 1, 1 GHz to 26 GHz, Vertical (RMS)

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 66 - 2412 MHz (CH1), HE20, RU26-0, Core 0 + Core 1, 1 GHz to 26 GHz

*No emissions found within 10 dB of the limit.

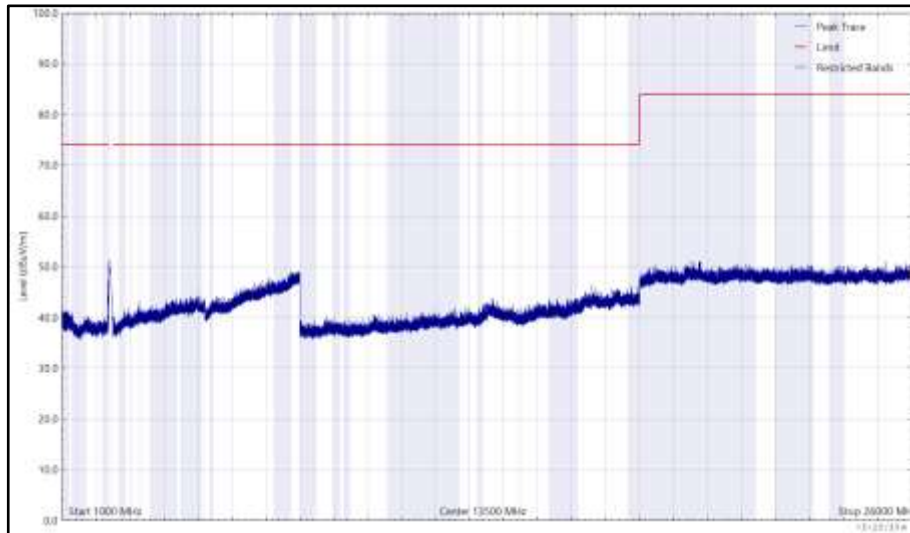


Figure 172 - 2412 MHz (CH1), HE20, RU26-0, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal (Peak)

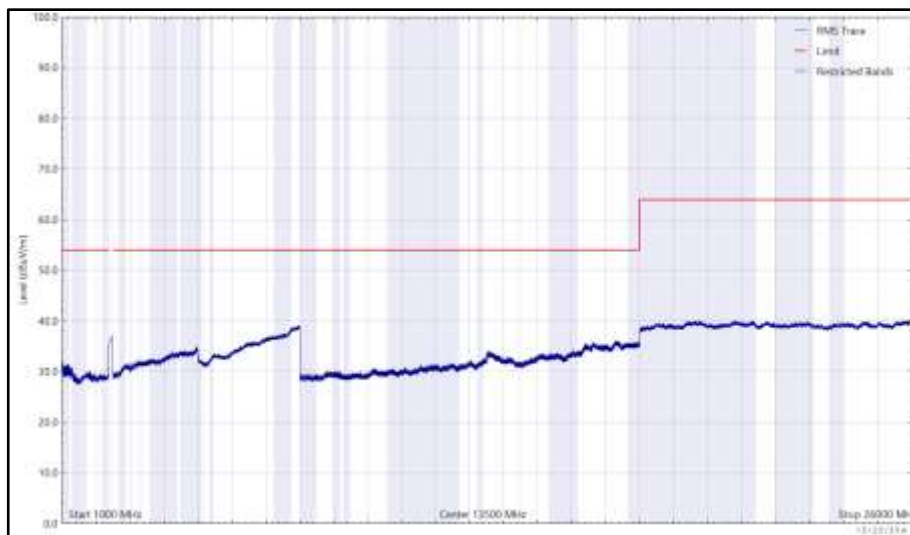


Figure 173 - 2412 MHz (CH1), HE20, RU26-0, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal (RMS)

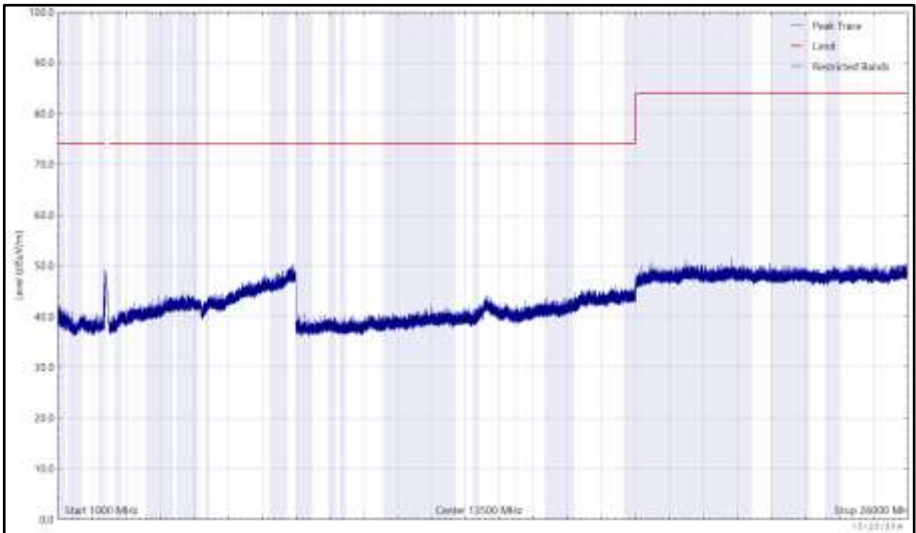


Figure 174 - 2412 MHz (CH1), HE20, RU26-0, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical (Peak)

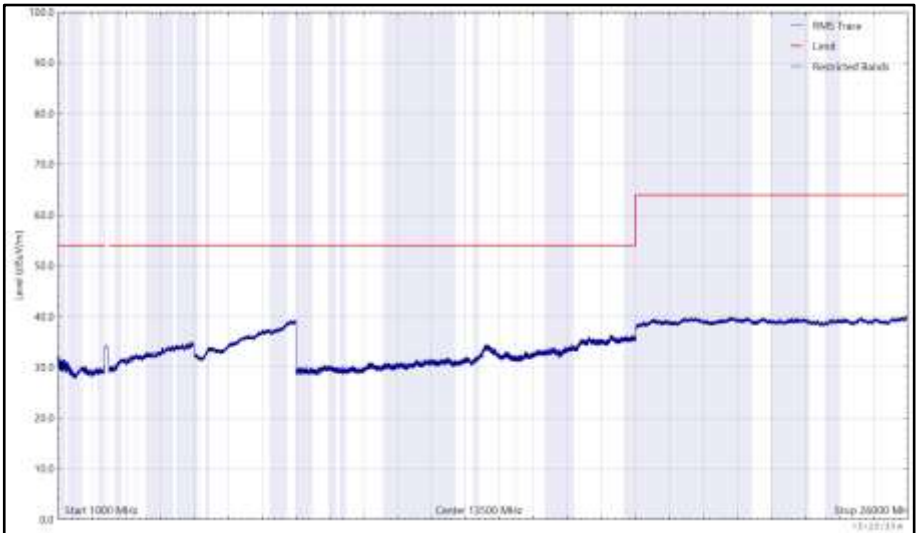


Figure 175 - 2412 MHz (CH1), HE20, RU26-0, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical (RMS)

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 67 - 2437 MHz (CH6), HE20, RU26-0, Core 0 + Core 1, 30 MHz to 26 GHz

*No emissions found within 10 dB of the limit.

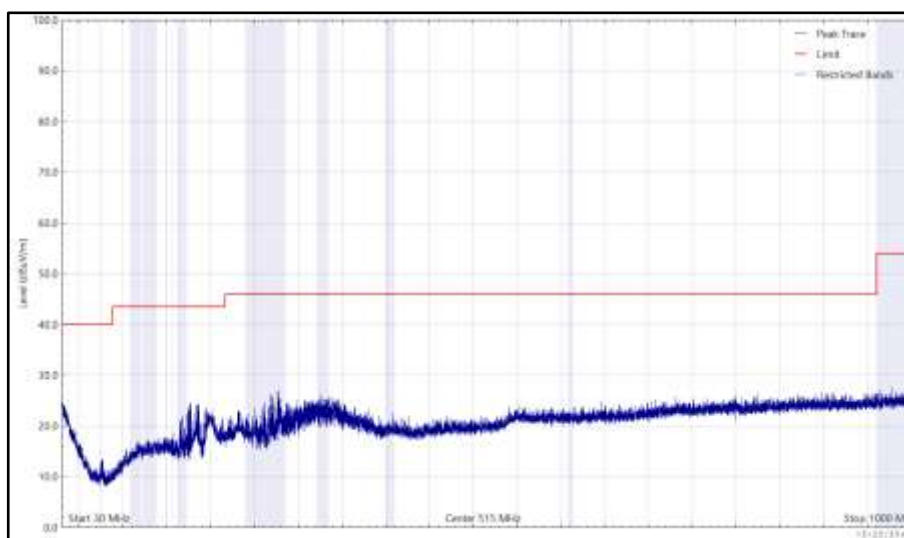


Figure 176 - 2437 MHz (CH6), HE20, RU26-0, Core 0 + Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

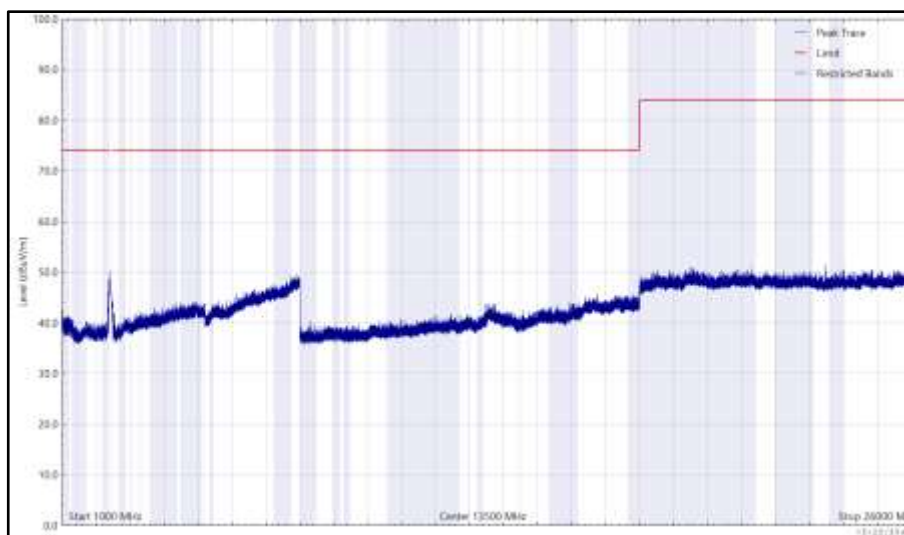


Figure 177 - 2437 MHz (CH6), HE20, RU26-0, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal (Peak)

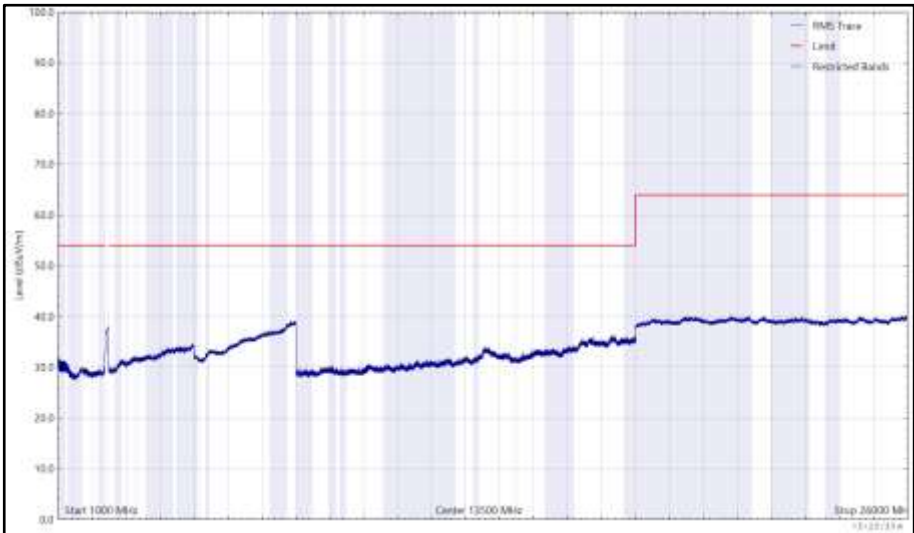


Figure 178 - 2437 MHz (CH6), HE20, RU26-0, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal (RMS)


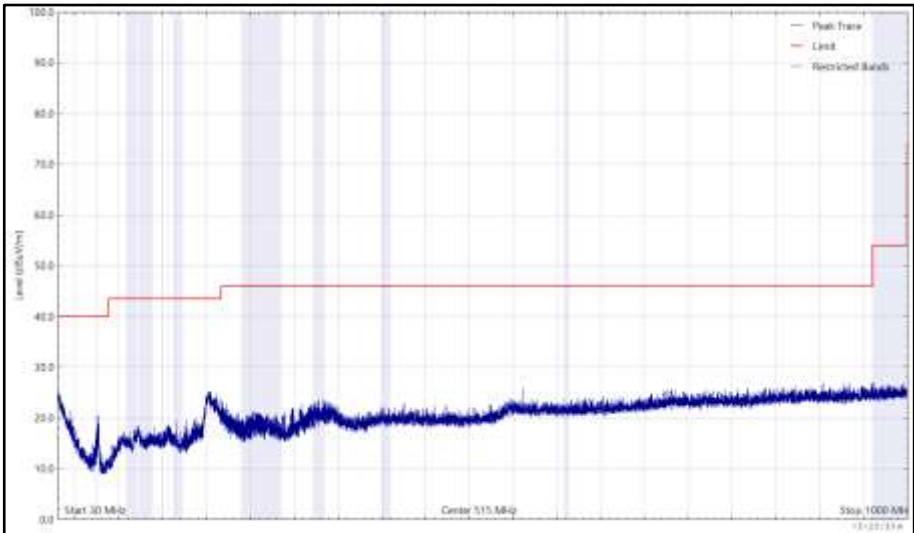


Figure 179 - 2437 MHz (CH6), HE20, RU26-0, Core 0 + Core 1, 30 MHz to 1 GHz, Vertical (Peak)

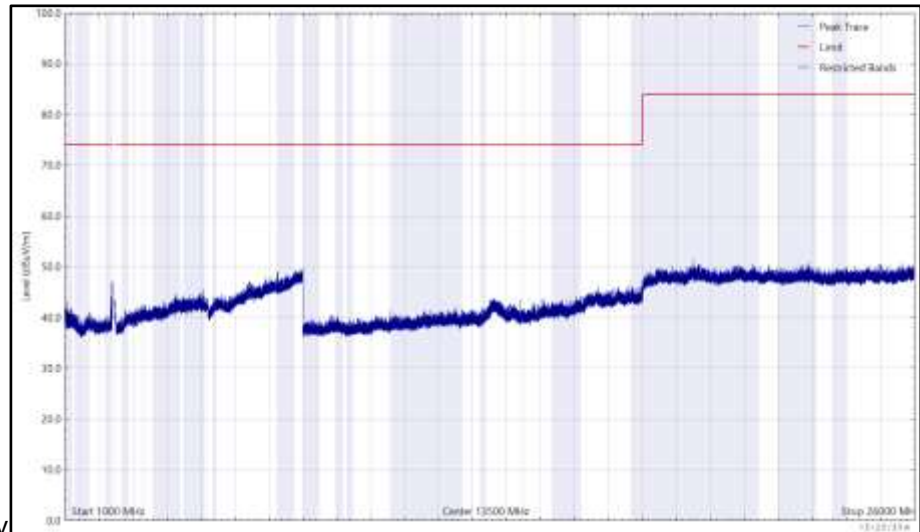

y



Figure 180 - 2437 MHz (CH6), HE20, RU26-0, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical (Peak)

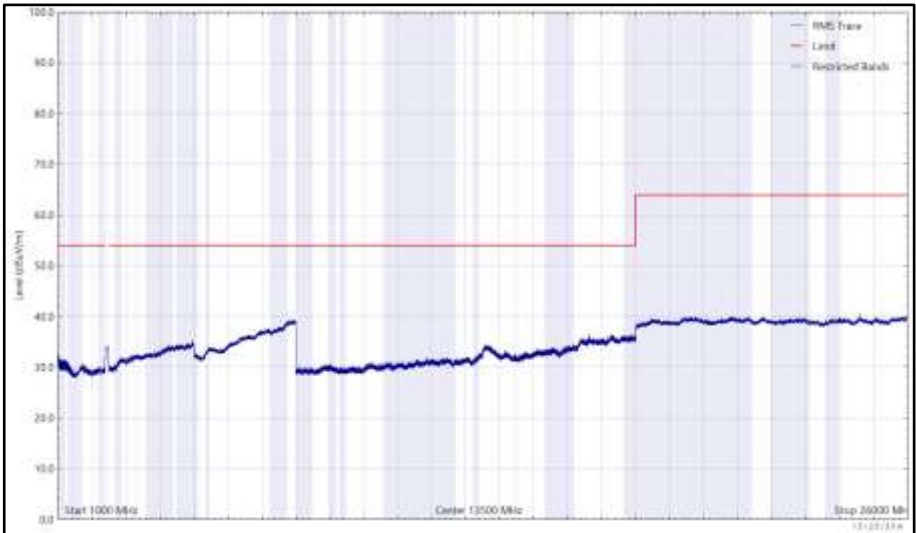


Figure 181 - 2437 MHz (CH6), HE20, RU26-0, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical (RMS)



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 68 - 2472 MHz (CH13), HE20, RU26-8, Core 0 + Core 1, 1 GHz to 26 GHz

*No emissions found within 10 dB of the limit.

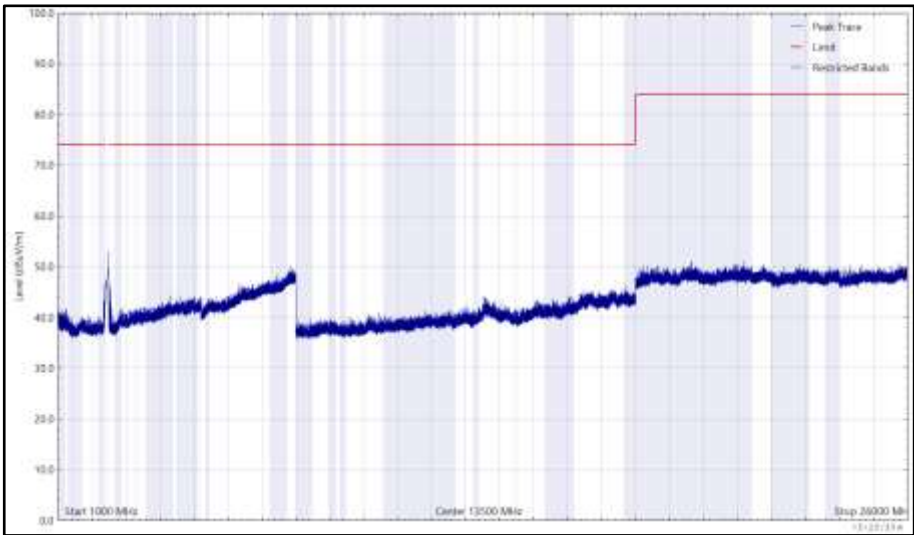


Figure 182 - 2472 MHz (CH13), HE20, RU26-8, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal (Peak)

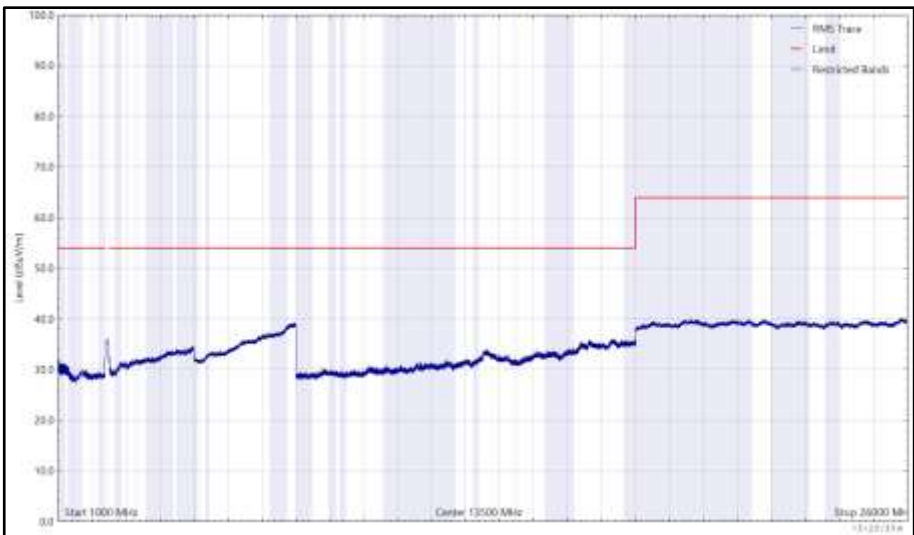


Figure 183 - 2472 MHz (CH13), HE20, RU26-8, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal (RMS)

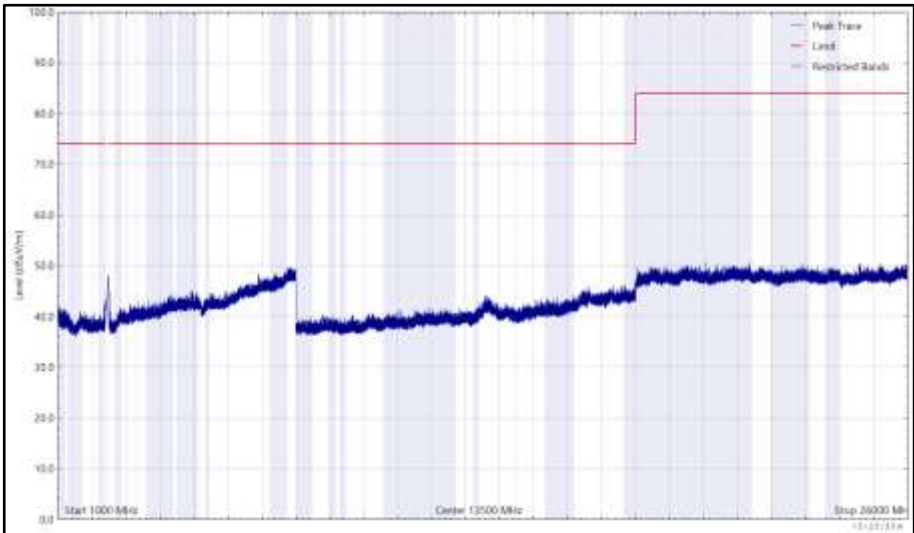


Figure 184 - 2472 MHz (CH13), HE20, RU26-8, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical (Peak)

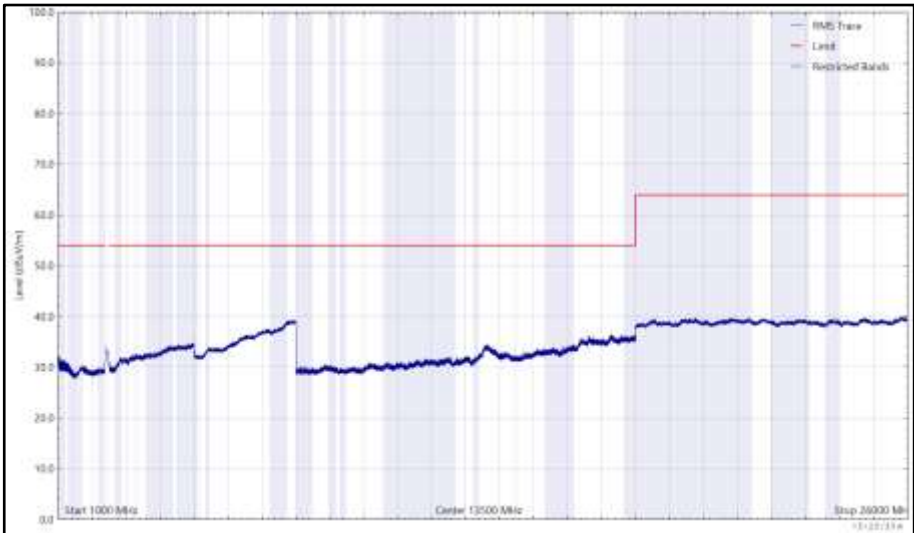


Figure 185 - 2472 MHz (CH13), HE20, RU26-8, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical (RMS)



FCC 47 CFR Part 15, Limit Clause 15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

ISED RSS-247, Limit Clause 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.



2.6.8 Test Location and Test Equipment Used

This test was carried out in EMC Chamber 5.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Antenna 18-40GHz (Double Ridge Guide)	Link Microtek Ltd	AM180HA-K-TU2	230	24	27-Jul-2022
18GHz - 40GHz Pre-Amplifier	Phase One	PSO4-0087	1534	12	18-Feb-2021
Screened Room (5)	Rainford	Rainford	1545	36	23-Jan-2021
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Antenna with permanent attenuator (Bilog)	Chase	CBL6143	2904	24	30-Sep-2021
Antenna Mast	Maturo GmbH	TAM 4.0-P	3916	-	TU
			3917		
Double Ridge Broadband Horn Antenna	Schwarzbeck	BBHA 9120 B	4848	12	10-Mar-2021
8 - 18 GHz preamp	Wright Technologies	PS06-0061/PS06-0060	4971	6	04-May-2021
Band Reject Filter - 2.425 GHz	Wainwright	WRCGV14-2390-2400-2450-2460-50SS	5067	12	02-Oct-2021
Band Reject Filter - 2.4585 GHz	Wainwright	WRCGV14-2423.5-2433.5-2483.5-2493.5-50SS	5069	12	12-Oct-2021
Preamplifier (30dB 1GHz to 18GHz)	Schwarzbeck	BBV 9718 C	5261	12	07-Apr-2021
Antenna (DRG Horn 7.5-18GHz)	Schwarzbeck	HWRD750	5348	12	22-Sep-2021
Thermo-Hygro-Barometer	PCE Instruments	OCE-THB-40	5470	12	16-Mar-2021
1m K-Type Cable	Junkosha	MWX241-01000KMSKMS/A	5511	12	03-Apr-2021
1m -SMA Cable	Junkosha	MWX221-01000AMSAMS/A	5513	12	01-Apr-2021
1m -SMA Cable	Junkosha	MWX221-01000AMSAMS/A	5514	12	01-Apr-2021
2m SMA Cable	Junkosha	MWX221-02000AMSAMS/A	5517	12	01-Apr-2021
8m N-Type Cable	Junkosha	MWX221-08000NMSNMS/B	5520	12	24-Mar-2021
2 m K Type Cable	Junkosha	MWX241-02000KMSKMS/A	5523	12	03-Apr-2021
EMI Test Receiver	Rohde & Schwarz	ESW44	5527	12	06-Feb-2021
3 GHz High pass Filter	Wainwright	WHKX12-2580-3000-18000-80SS	5548	12	05-May-2021
1200 MHz Low Pass Filter (01)	Mini-Circuits	VLF-1200+	5559	12	23-May-2021

Table 69

TU -Traceability Unscheduled



3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
Maximum Conducted Output Power	± 3.2 dB
Power Spectral Density	± 3.2 dB
Emission Bandwidth	± 279.049 kHz
Authorised Band Edges	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Restricted Band Edges	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Spurious Radiated Emissions	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB

Table 70

Measurement Uncertainty Decision Rule

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2007, clause 4.4.3 and 4.5.1.