



**FCC Part 1 Subpart I
FCC Part 2 Subpart J**

CERTIFICATION TEST REPORT

FOR

TWO COIL CHARGER

MODEL NO: A2458

FCC ID: BCGA2458

REPORT NUMBER: 13371062-E3V2

ISSUE DATE: OCTOBER 20, 2020

Prepared for
APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



Revision History

Rev.	Issue Date	Revisions	Revised By
V1	10/14/2020	Initial Issue	Thu Chan
V2	10/20/2020	Address TCB's Questions	Chin Pang

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. KDB 680106 D01 SECTION 5b EQUIPMENT APPROVAL CONSIDERATIONS	6
5. EQUIPMENT UNDER TEST	7
5.1. <i>DESCRIPTION OF EUT</i>	<i>7</i>
5.2. <i>WORST-CASE CONFIGURATION AND MODE</i>	<i>7</i>
5.3. <i>DESCRIPTION OF TEST SETUP</i>	<i>9</i>
6. TEST AND MEASUREMENT EQUIPMENT	25
7. DUTY CYCLE	26
8. MAXIMUM PERMISSIBLE RF EXPOSURE	30
8.1. <i>FCC LIMITS AND SUMMARY</i>	<i>30</i>
9. SETUP PHOTO	50

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A

EUT DESCRIPTION: TWO COIL CHARGER

MODEL NUMBER: A2458


SERIAL NUMBER: G39Z400JNGHV

DATE TESTED: SEPTEMBER 25 – OCTOBER 07, 2020

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 1 SUBPART I & PART 2 SUBPART J	Complies

UL Verification Services Inc. measured the RF Exposure of the above equipment in accordance with the requirements set forth in the above standards, using test results reported in the test report documents referenced below and/or documentation furnished by the applicant. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations of these calculations. The results show that the equipment is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Reviewed By:		Prepared By:
		
Chin Pang		Tony Wang
Senior engineer		Test Engineer
UL Verification Service Inc.		UL Verification Services Inc.

2. TEST METHODOLOGY

All calculations were made in accordance with FCC OET Bulletin 65 Edition 97-01.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street	47658 Kato Rd.
☐ Chamber A (IC:2324B-1)	☐ Chamber D (IC:22541-1)	☐ Chamber I (IC: 2324A-5)
☐ Chamber B (IC:2324B-2)	☐ Chamber E (IC:22541-2)	☐ Chamber J (IC: 2324A-6)
☐ Chamber C (IC:2324B-3)	☐ Chamber F (IC:22541-3)	☐ Chamber K (IC: 2324A-1)
☒ Temperature B Room	☐ Chamber G (IC:22541-4)	☐ Chamber L (IC: 2324A-3)
	☐ Chamber H (IC:22541-5)	

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers above are covered under Industry Canada company address and respective code

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0

4. KDB 680106 D01 SECTION 5b EQUIPMENT APPROVAL CONSIDERATIONS

Requirement	Device
(1) Power transfer frequency is less than 1 MHz.	Yes. The operating frequencies are 360kHz, 127.7kHz, and 326kHz.
(2) Output power from each primary coil is less than or equal to 15 watts.	Yes. The maximum power is 15 Watts
(3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.	Yes. The system only allows for capable wireless power transfer between one source and one client at any given time.
(4) Client device is placed directly in contact with the transmitter.	Yes. The client device is placed directly in contact with the transmitter.
(5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	Yes. It is a mobile device.
(6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.	For the worst case leakage of portable position @360kHz, please see exposure simulation report. For the operating frequency at mobile position, the measurement was taken based on KDB 680106 D01. The worst case leakage of mobile position @360kHz is 4.42%, @326kHz is 5.96%, and @127.7kHz is 6.03%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a magnetic charger with two-coil charging mat designed to be capable of inductively charging up to two client devices at once. One coil is used for charging an iPhone or an AirPods Case while another coil is used for charging an Apple Watch. The charging function operates at 326.5kHz, 127.7kHz, and 360kHz. It supports charging at 5W, 7.5W, and 15W power and NFC Reader operation. There is no internal battery.

5.2. WORST-CASE CONFIGURATION AND MODE

The EUT is a magnetic charger with two-coil charging mat enclosed in stainless steel case with 1 meter cable length USB -C type. For the standby mode, the measurements were taken on the fundamental emissions of 326kHz and the radiated spurious emissions of 360kHz/127.7kHz due to un-intentional radiation coming from the response of LC resonance to the DC pulse signal. For operation mode, it was tested with the WPT clients. For the entire radiated emissions test, the EUT was investigated on the following configuration during the test at its natural orientation.

Based on the client's internal investigation, the worst case was always on top position as for all the measurements. For the single WPT client in charging mode, we did all the airgaps & shifts positions on New iPhone @360kHz, Legacy iPhone @127.7kHz, New Apple Watch @ 326 kHz, Legacy Apple Watch @326 kHz and AirPods @127.7kHz measurements for both flatbed and folded configurations. For multiple WPT clients in charging mode, we only tested the worst case position which based on the single WPT client test results.

Config	Mode	Descriptions
1	Standby (Flatbed Position)	EUT Alone powered by AC/DC adapter.
2	Operating @360kHz (Flatbed Position)	Direct contact with Airgaps and Shifts during charging between the EUT & WPT Client, and the EUT is powered by AC/DC adapter via USB-C cable.
3	Operating @127.7kHz (Flatbed Position)	Direct contact with Airgaps and Shifts during charging between the EUT & WPT Client, and the EUT is powered by AC/DC adapter via USB-C cable.
4	Operating @127.7kHz (Flatbed Position)	Direct contact with Airgaps and Shifts during charging between the EUT & WPT Client, and the EUT is powered by AC/DC adapter via USB-C cable.
5	Operating @326kHz (Flatbed Position)	Direct contact with Airgaps and Shifts during charging between the EUT & WPT Client, and the EUT is powered by AC/DC adapter via USB-C cable.
6	Standby (Folded Position)	EUT Alone powered by AC/DC adapter.
7	Operating @360kHz (Folded Position)	Direct contact with Airgaps and Shifts during charging between the EUT & WPT Client, and the EUT is powered by AC/DC adapter via USB-C cable.
8	Operating @127.7kHz (Folded Position)	Direct contact with Airgaps and Shifts during charging between the EUT & WPT Client, and the EUT is powered by AC/DC adapter via USB-C cable.

9	Operating @127.7kHz (Folded Position)	Direct contact with Airgaps and Shifts during charging between the EUT & WPT Client, and the EUT is powered by AC/DC adapter via USB-C cable.
10	Operating @326kHz (Folded Position)	Direct contact with Airgaps and Shifts during charging between the EUT & WPT Client, and the EUT is powered by AC/DC adapter via USB-C cable.
11	Operating @360kHz + 326kHz (Flatbed Position, Spot Check Worst Case only)	Direct contact with Airgaps and Shifts during charging between the EUT & WPT Clients, and the EUT is powered by AC/DC adapter via USB-C cable.
12	Operating @127.7kHz + 326kHz (Flatbed Position, Spot Check Worst Case only)	Direct contact with Airgaps and Shifts during charging between the EUT & WPT Clients, and the EUT is powered by AC/DC adapter via USB-C cable.
13	Operating @127.7kHz + 326kHz (Flatbed Position, Spot Check Worst Case only)	Direct contact with Airgaps and Shifts during charging between the EUT & WPT Clients, and the EUT is powered by AC/DC adapter via USB-C cable.

5.3. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

SUPPORT EQUIPMENT & PERIPHERALS LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
WPT Client (15W Load iPhone)	Apple	A2402	G6TD300804HV	BCG-E3542A
WPT Client (7.5W Load iPhone)	Apple	A2160	G39Z400JNGHV	BCG-E3305A
WPT Client (1W Load AirPods Charging Case)	Apple	A2190	DLCZ415LLKKT	BCG-A2084
WPT Client (1W Load iWatch/	Apple	A2292	GY6D302D03HW	BCG-A292
WPT Client (1W Load Legacy Watch	Apple	A2095	FHLZ30VFMLF1	BCG-A2095
AC/DC Adapter	Apple	A1882	C4H028208GYPF4F4S	DoC

I/O CABLES

The EUT with lightning to USB-C cable powered by AC/DC Adapter.

TEST SETUP

The following configurations are tested:

Config. #	Mode	Descriptions
1	Standby (Flatbed Position) @360kHz/127.7kHz/326kHz	EUT Alone powered by AC/DC adapter
2	Operating (Flatbed Position) (New iPhone @360kHz, ~10%, 20~50%, and >75% Power Charging)	EUT with lightning to USB-C cable powered by AC/DC Adapter & Wireless Charging to WPT Client. New iPhone charging power with airgap and shift below: _15W: Direct Contact _15W: 2mm Airgap, 2mm Shift Top as Worst Case Position _7.5W: 4mm Airgap, 4mm Shift Top as Worst Case Position _3.5W: 5mm Airgap, 5mm Shift Top as Worst Case Position
3	Operating (Flatbed Position) (Legacy iPhone @127.7kHz, ~10%, 20~50%, and >75% Power Charging)	EUT with lightning to USB-C cable powered by AC/DC Adapter & Wireless Charging to WPT Client. Legacy iPhone charging power with airgap and shift below: _7.5W: Direct Contact _3W: 5mm Airgap, 5mm Shift Top as Worst Case Position
4	Operating (Flatbed Position) (AirPods @127.7kHz, ~10%, 20~50%, and >75% Power Charging)	EUT with lightning to USB-C cable powered by AC/DC Adapter & Wireless Charging to WPT Client. AirPods charging power with airgap and shift below: _1W: Direct Contact _1W: 2mm Airgap, 5mm Shift Top as Worst Case Position
5	Operating (Flatbed Position) (iWatch @326kHz, ~10%, 20~50%, and >75% Power Charging)	EUT with lightning to USB-C cable powered by AC/DC Adapter & Wireless Charging to WPT Client. _Direct Contact with New iWatch _Direct Contact with Legacy iWatch
6	Standby (Folded Position) @360kHz/127.7kHz/326kHz	EUT Alone powered by AC/DC adapter

7	Operating (Folded Position) (New iPhone @360kHz, ~10%, 20~50%, and >75% Power Charging)	EUT with lightning to USB-C cable powered by AC/DC Adapter & Wireless Charging to WPT Client. New iPhone charging power with airgap and shift below: _15W: Direct Contact _15W: 2mm Airgap, 2mm Shift Top as Worst Case Position _7.5W: 4mm Airgap, 4mm Shift Top as Worst Case Position _3.5W: 5mm Airgap, 5mm Shift Top as Worst Case Position
8	Operating (Folded Position) (Legacy iPhone @127.7kHz, ~10%, 20~50%, and >75% Power Charging)	EUT with lightning to USB-C cable powered by AC/DC Adapter & Wireless Charging to WPT Client. Legacy iPhone charging power with airgap and shift below: _7.5W: Direct Contact _3W: 5mm Airgap, 5mm Shift Top as Worst Case Position
9	Operating (Folded Position) (AirPods @127.7kHz, ~10%, 20~50%, and >75% Power Charging)	EUT with lightning to USB-C cable powered by AC/DC Adapter & Wireless Charging to WPT Client. AirPods charging power with airgap and shift below: _1W: Direct Contact _1W: 2mm Airgap, 5mm Shift Top as Worst Case Position
10	Operating (Folded Position) (iWatch @326kHz, ~10%, 20~50%, and >75% Power Charging)	EUT with lightning to USB-C cable powered by AC/DC Adapter & Wireless Charging to WPT Client. _Direct Contact with New iWatch _Direct Contact with Legacy iWatch
11	Operating (Flatbed Position) (New iPhone @360kHz + iWatch @326kHz, ~10%, 20~50%, and >75% Power Charging)	EUT with lightning to USB-C cable powered by AC/DC Adapter & Wireless Charging to WPT Clients. New iPhone charging power with airgap and shift below: _7.5W: 4mm Airgap, 4mm Shift Top as Worst Case Position iWatch: Direct Contact
12	Operating (Flatbed Position) (Legacy iPhone @127.7kHz + iWatch @326kHz, ~10%, 20~50%, and >75% Power Charging)	EUT with lightning to USB-C cable powered by AC/DC Adapter & Wireless Charging to WPT Clients. Legacy iPhone charging power with airgap and shift below: _3W: 5mm Airgap, 5mm Shift Top as Worst Case Position iWatch: Direct Contact

13	Operating (Flatbed Position) (AirPods @127.7kHz + iWatch @326kHz, ~10%, 20~50%, and >75% Power Charging)	EUT with lightning to USB-C cable powered by AC/DC Adapter & Wireless Charging to WPT Clients. AirPods charging power with airgap and shift below: 1W: 2mm Airgap, 5mm Shift Top as Worst Case Position iWatch: Direct Contact
----	---	--

MEASUREMENT SETUP

For the 360kHz charging frequency with 15W load at portable position, please see exposure simulation report.

For the 360kHz, 127.7kHz, and 326kHz charging frequencies at mobile position, the measurements were taken using a probe placed 15 cm surrounding the device and 20 cm above the top surface for all configurations per KDB 680106 D01.

Side View

EHP200 Probe

Top View

20cm

20cm

Watch Charger

Phone Charger

Top View

326 kHz

Watch Charger

15cm

S2

360 kHz / 127.7 kHz

15cm

S1

15cm

S3

15cm

15cm

Phone Charger

S4

Tx (DUT)

The diagram illustrates the experimental setup for measuring the EHP200 probe. The **Side View** shows the probe positioned 20cm above two charging devices: a Watch Charger and a Phone Charger. The **Top View** provides a detailed layout of the Tx (DUT) and the probe's position. The Tx (DUT) is a central gray structure with two circular coils. Four sensors (S1, S2, S3, S4) are placed around the coils at 15cm distances. The Watch Charger is positioned at 326 kHz, and the Phone Charger is positioned at 360 kHz / 127.7 kHz. The probe is positioned 20cm above the chargers.

Side View

EHP200 Probe

Top View

20cm

20cm

iPhone

0mm/2mm/4mm/5mm Airgap

Watch Charger

Phone Charger

Top View

EHP200 Probe

360 kHz/ 127.7 kHz

15cm

15cm

15cm

15cm

15cm

15cm

S1

S2


S3

S4


2mm/4mm/5mm Shift

The image contains two diagrams illustrating the experimental setup for the EHP200 Probe. The 'Side View' diagram shows the probe positioned above a 'Watch Charger' and a 'Phone Charger'. The probe is at a height of 20cm from the watch charger and 20cm from the phone charger. The phone charger is labeled 'iPhone' and has an 'Airgap' of 0mm, 2mm, 4mm, or 5mm. The 'Top View' diagram shows the probe positioned above the phone charger, with a distance of 15cm between the probe and the charger. The probe is also positioned above the watch charger, with a distance of 15cm between the probe and the charger. The watch charger has a circular opening, and the phone charger has a rectangular opening. The distance between the two chargers is 15cm. The probe is labeled 'EHP200 Probe' and '360 kHz/ 127.7 kHz'. The diagram also shows the 'S1', 'S2', 'S3', and 'S4' positions relative to the chargers and the probe. The 'S1' position is 15cm from the phone charger. The 'S2' position is 15cm from the watch charger. The 'S3' position is 15cm from the watch charger. The 'S4' position is 15cm from the phone charger. The '2mm/4mm/5mm Shift' is indicated for the watch charger's circular opening.


CONFIGURATION 4 (Operating Mode @ Flatbed Position, AirPods):

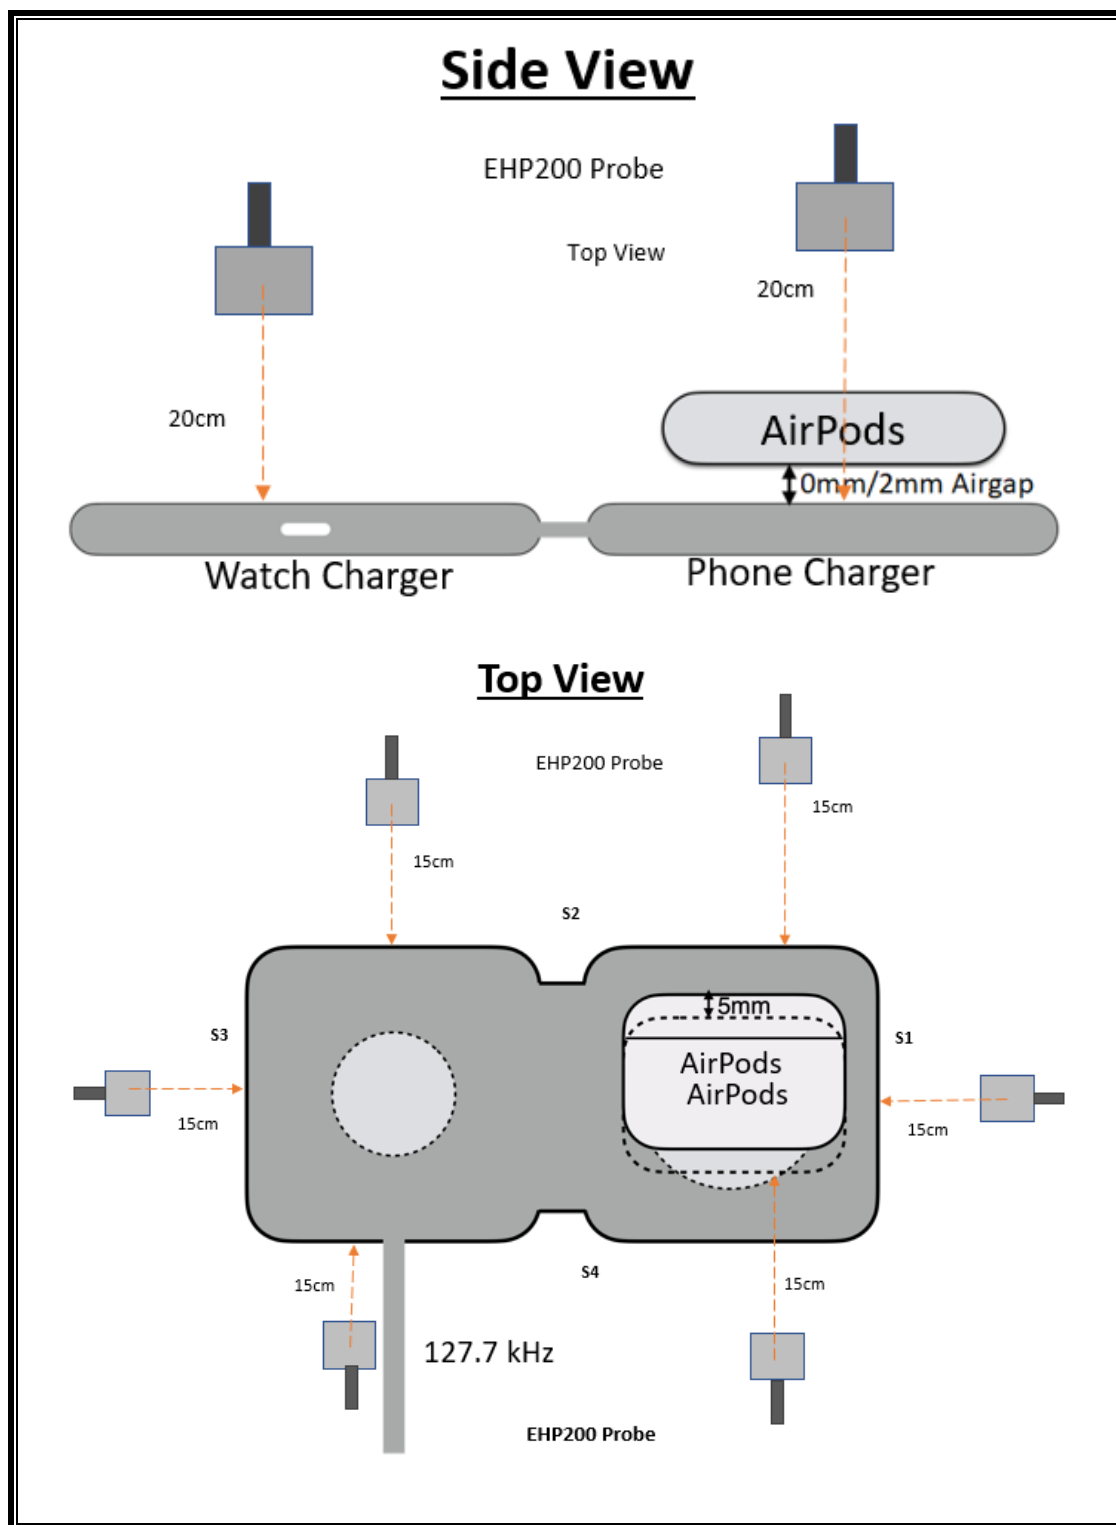

CONFIGURATION 5 (Operating Mode @ Flatbed Position, iWatch):

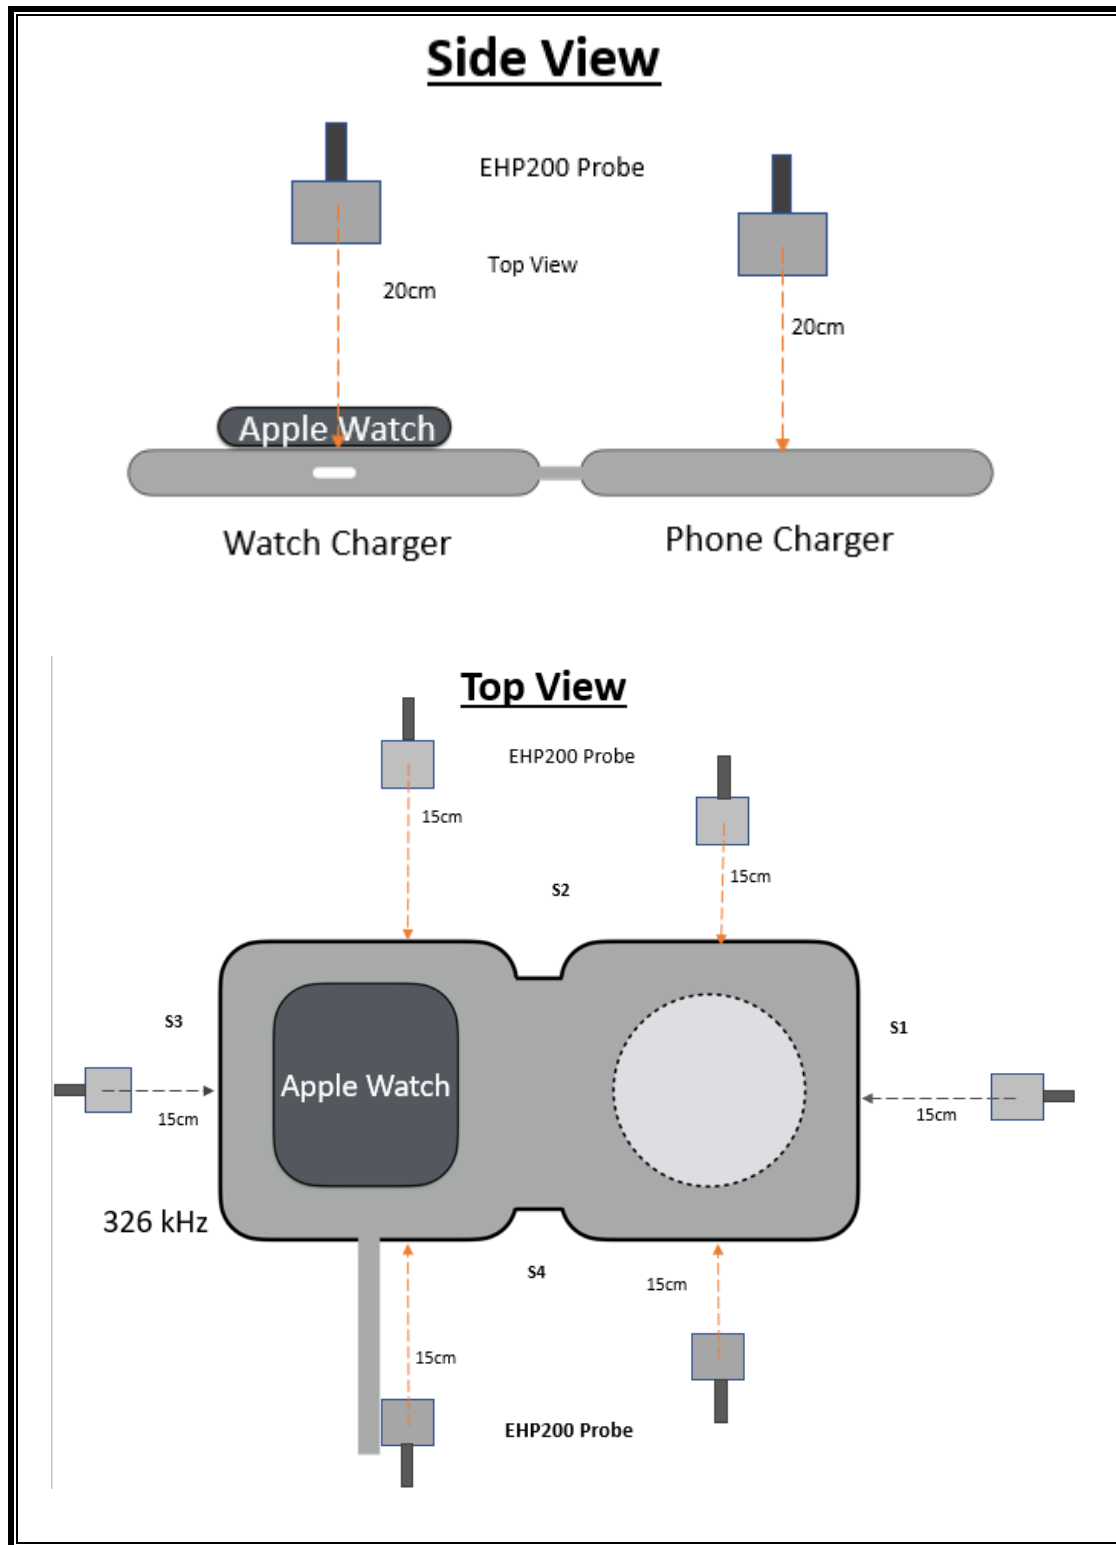

CONFIGURATION 6 (Standby Mode @ Folded Position):

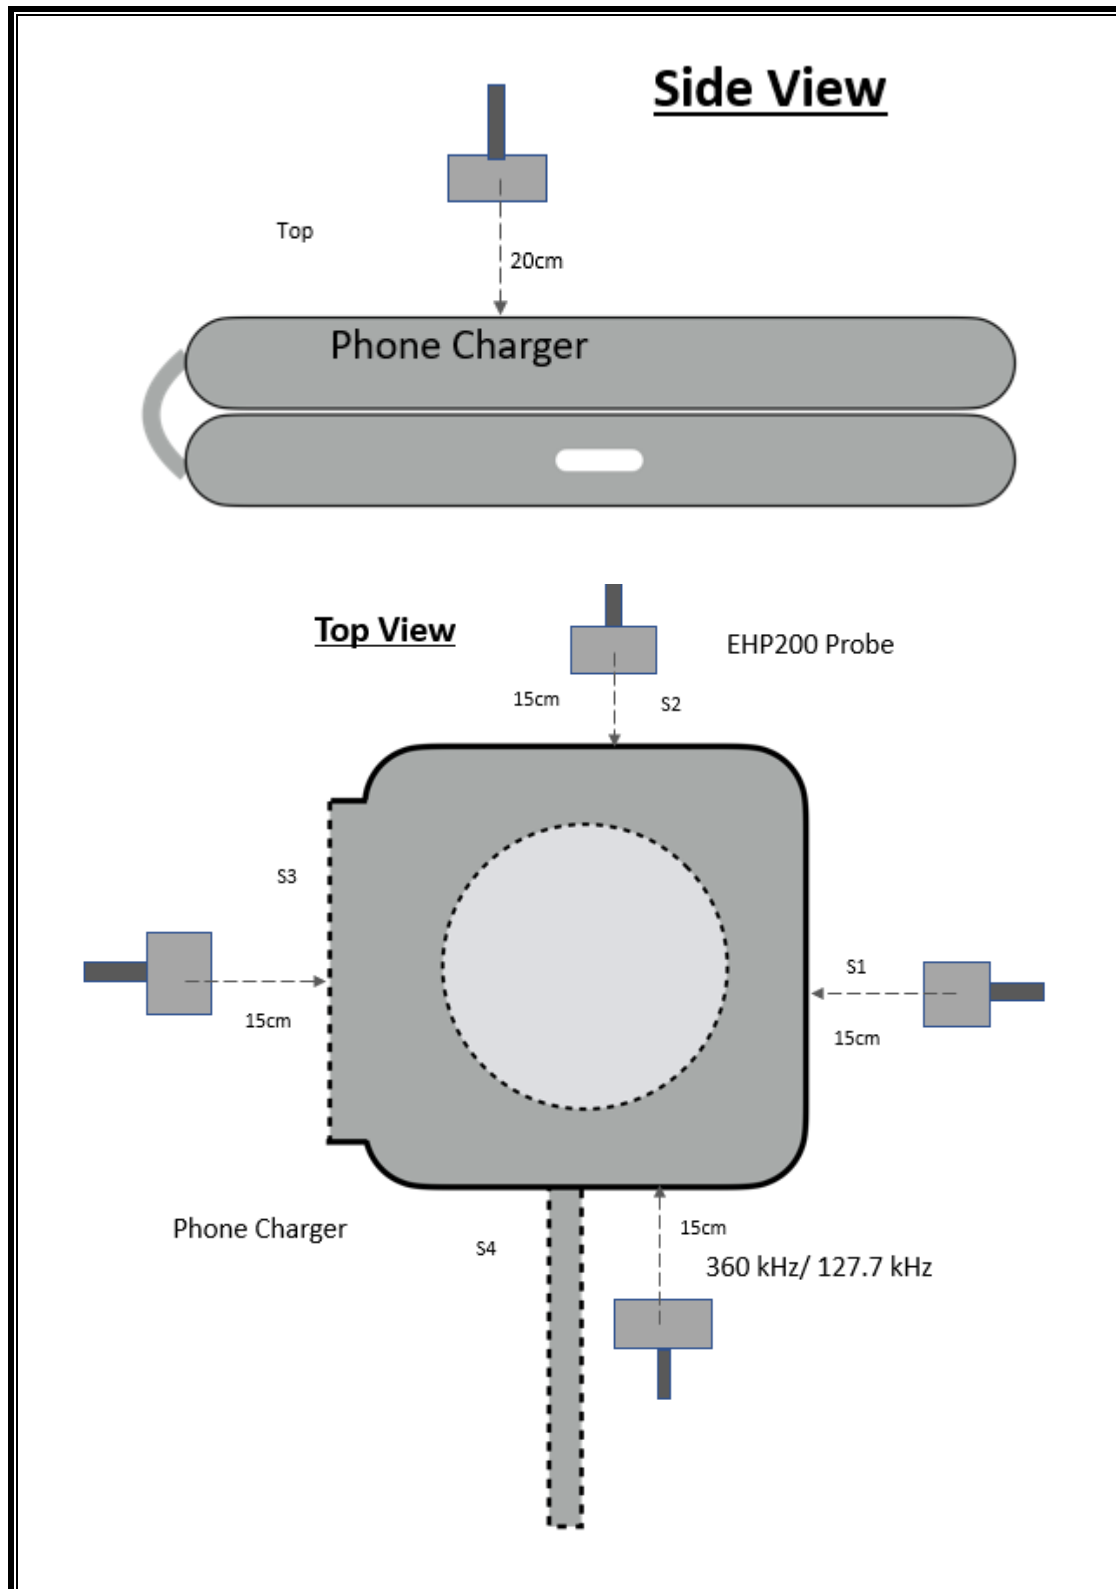

Side View

EHP200 Probe

Top

20cm

iPhone

0mm/2mm/4mm/5mm Airgap

Top View

EHP200 Probe

S2

15cm

2mm/4mm/5mm Shift

iPhone

S3

15cm

S1


15cm

360KHz/127.7KHz


S4

15cm

CONFIGURATION 9 (Operating Mode @ Folded Position, AirPods):

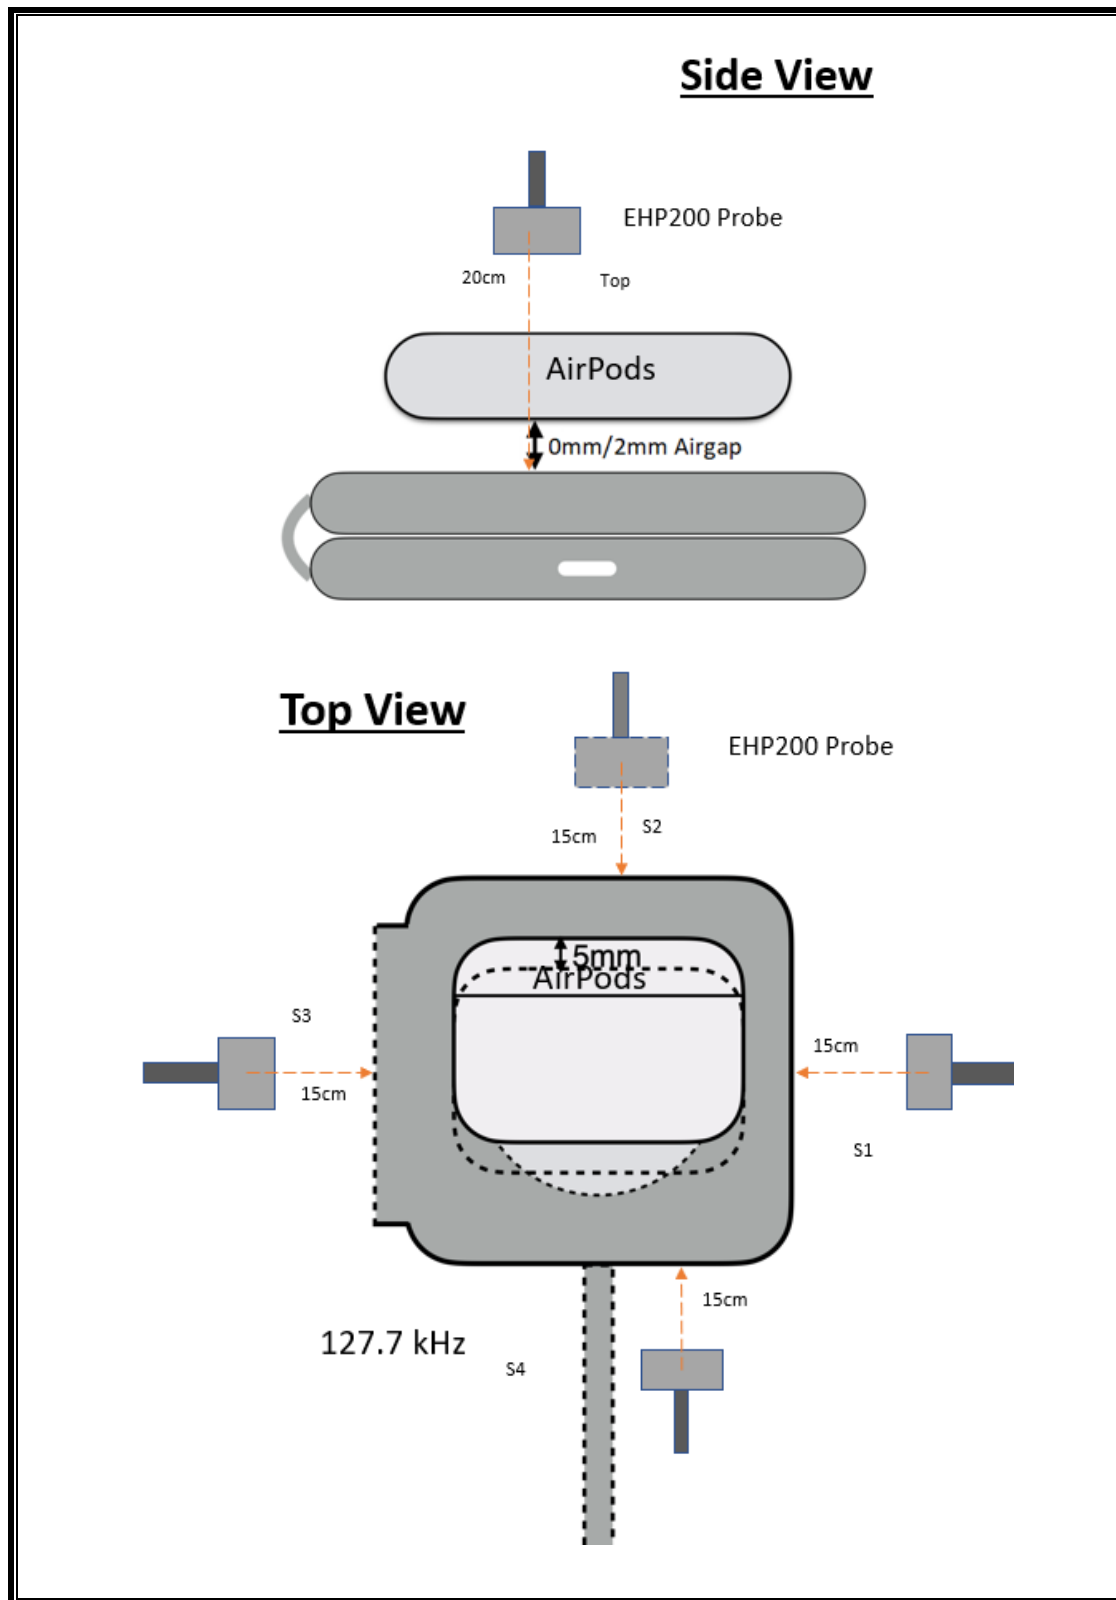

CONFIGURATION 10 (Operating Mode @ Folded Position, iWatch):

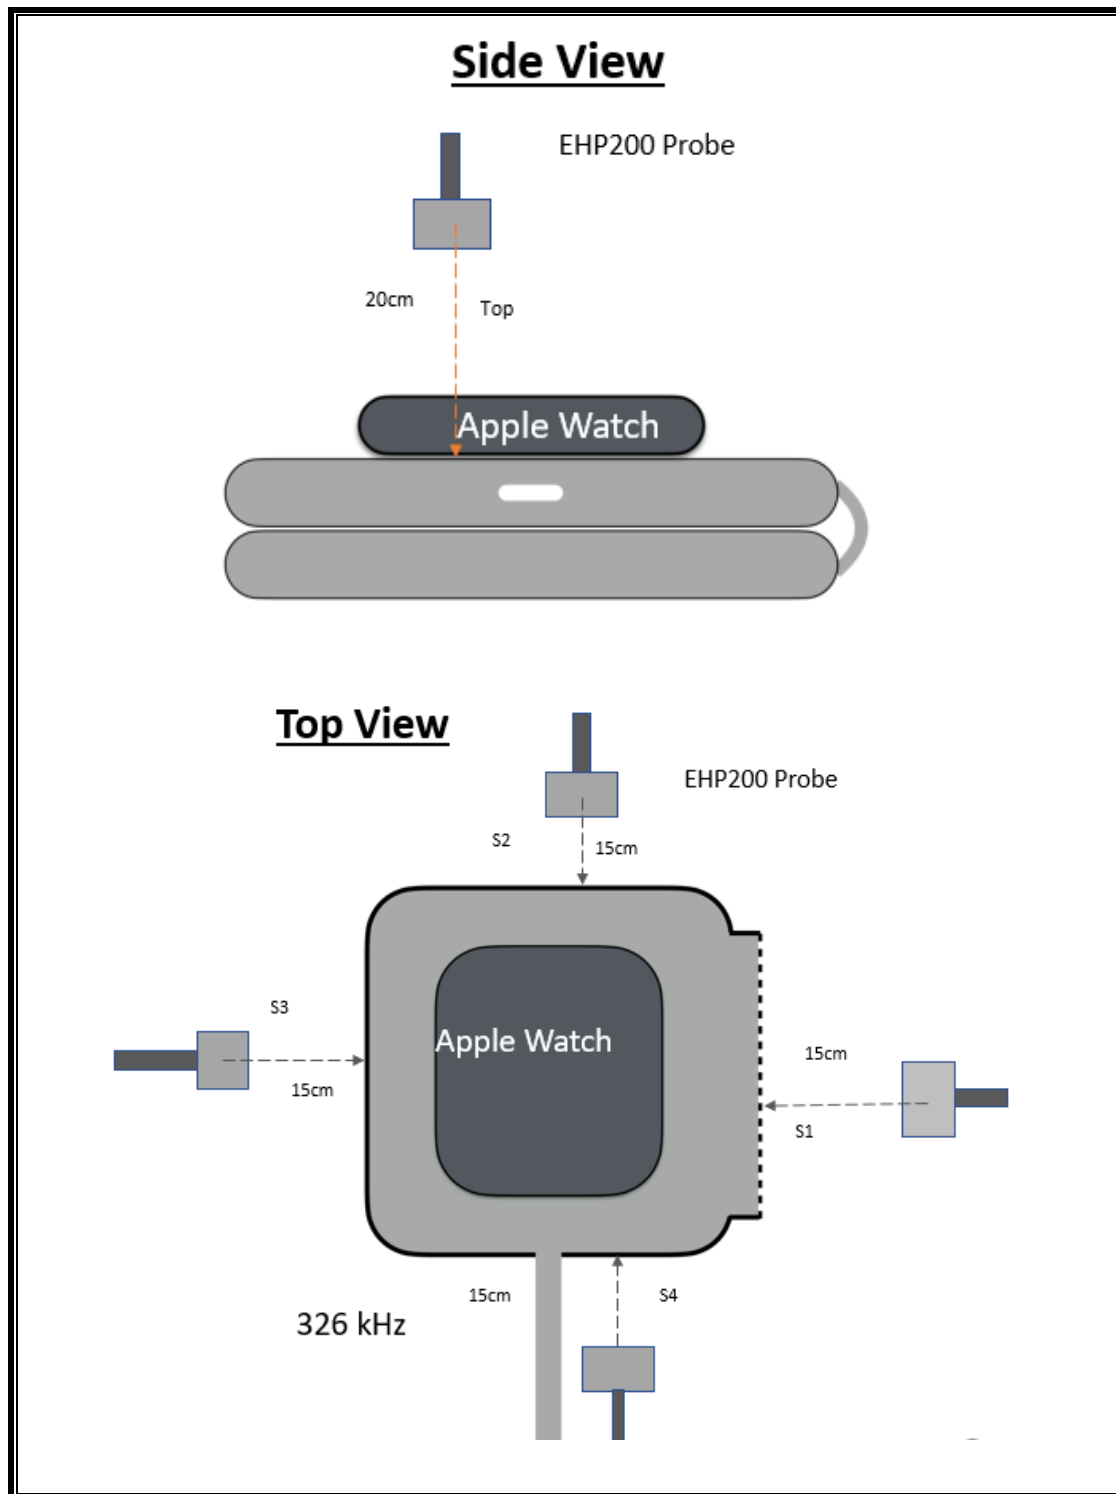

Side View

EHP200 Probe

Top

20cm

20cm

4mm

Apple Watch

iPhone

Top View

EHP200 Probe

Top

15cm

15cm

4mm

15cm

15cm

15cm

15cm

15cm

Apple Watch

iPhone

S1

S2

S3

S4


326 kHz

360 kHz


New Phone + New Watch

Worst Case: 4mm gap and 4mm shift to Top

CONFIGURATION 12 (Operating Mode @ Flatbed Position, Legacy iPhone + iWatch):

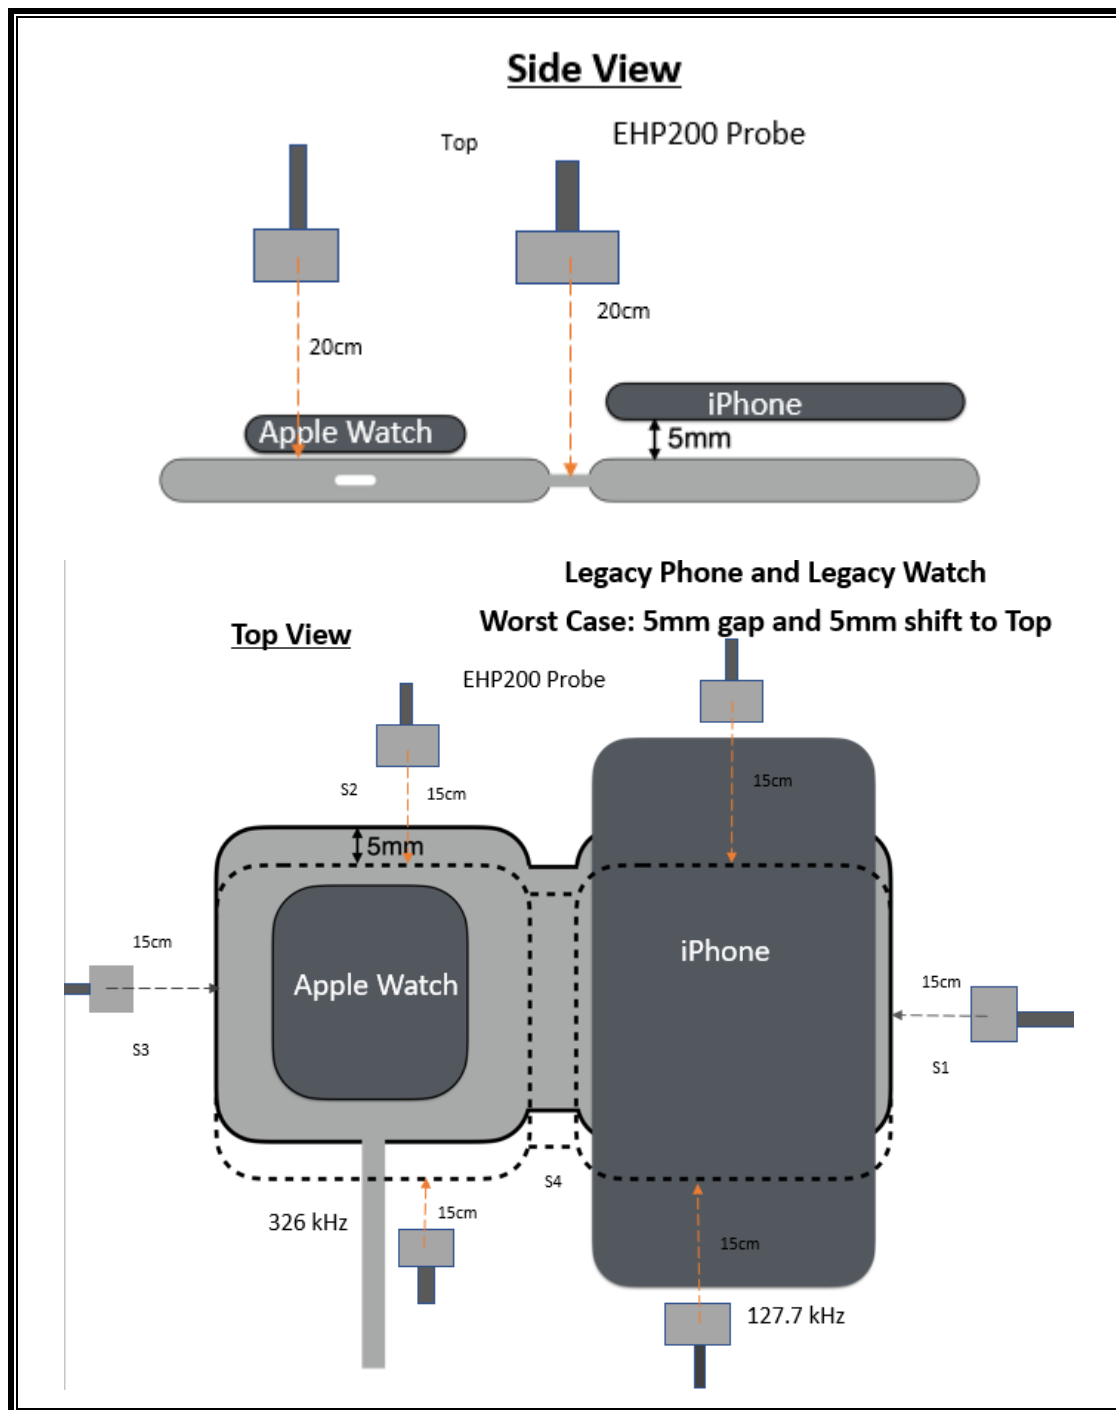

CONFIGURATION 13 (Operating Mode @ Flatbed Position, AirPods + iWatch):

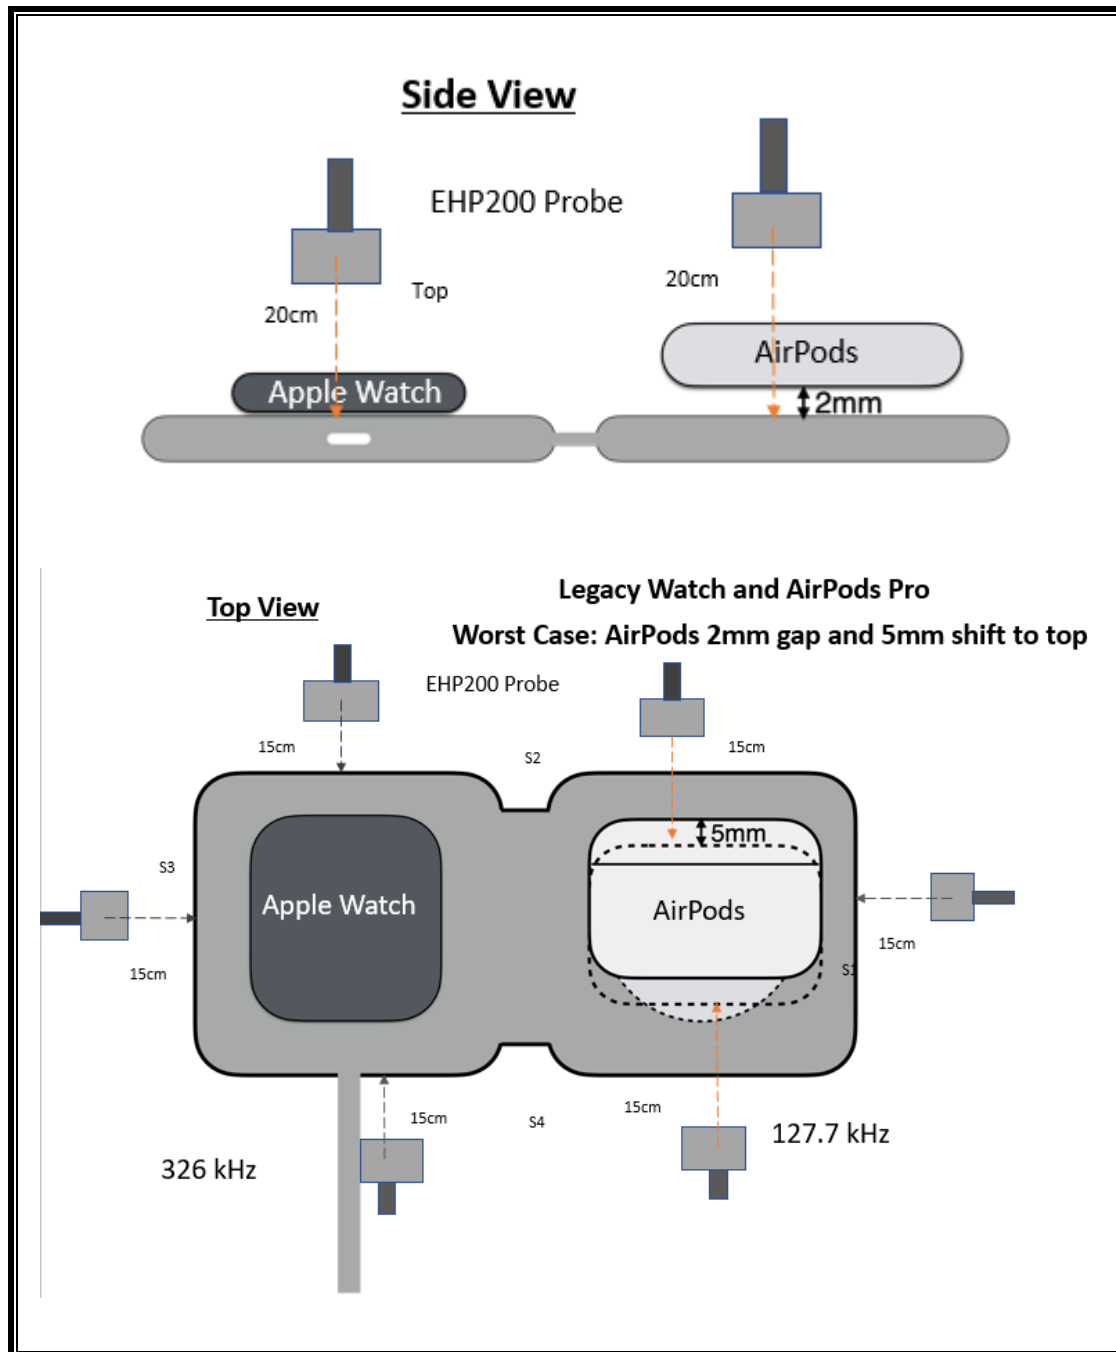

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was used for the tests documented in this report:

Test Equipment List						
Description	Manufacturer	Model	S/N	Label ID	Cal Date	Cal Due
Electric and Magnetic Field Probe	Narda	EHP-200A	160WX41008	T1085	11/25/2019	11/25/2020
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A-544	N/A	T342	01/23/2020	01/23/2021

7. DUTY CYCLE

LIMITS



None; for reporting purposes only.



PROCEDURE



Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
Standby @ 360kHz	0.48	123.60	0.00	0.39%	24.14
Operating Frequency @360kHz	100.00	100.00	1.00	100.00%	0.00
Standby @ 128kHz	0.40	123.60	0.00	0.32%	24.90
Operating Frequency @128kHz	100.00	100.00	1.00	100.00%	0.00
Standby @ 326kHz	0.48	123.60	0.00	0.39%	24.14
Operating Frequency @326kHz	100.00	100.00	1.00	100.00%	0.00

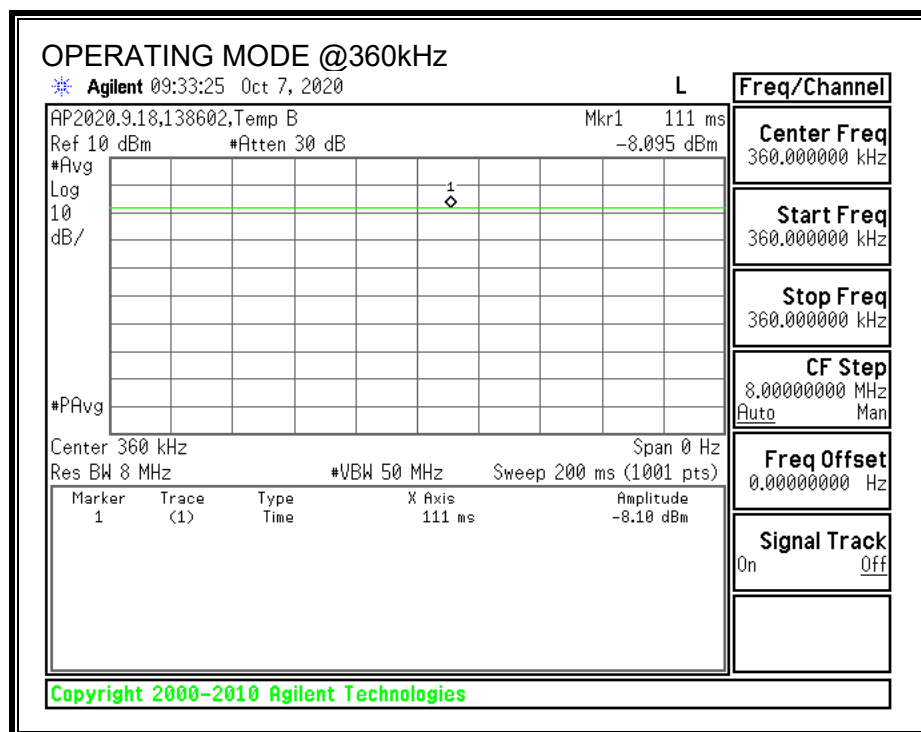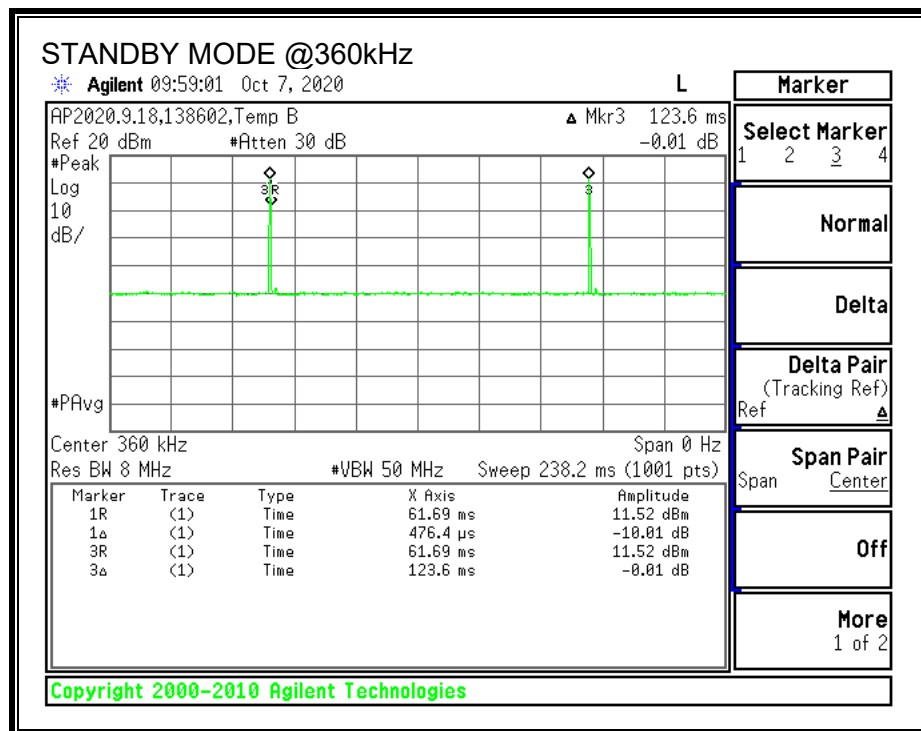

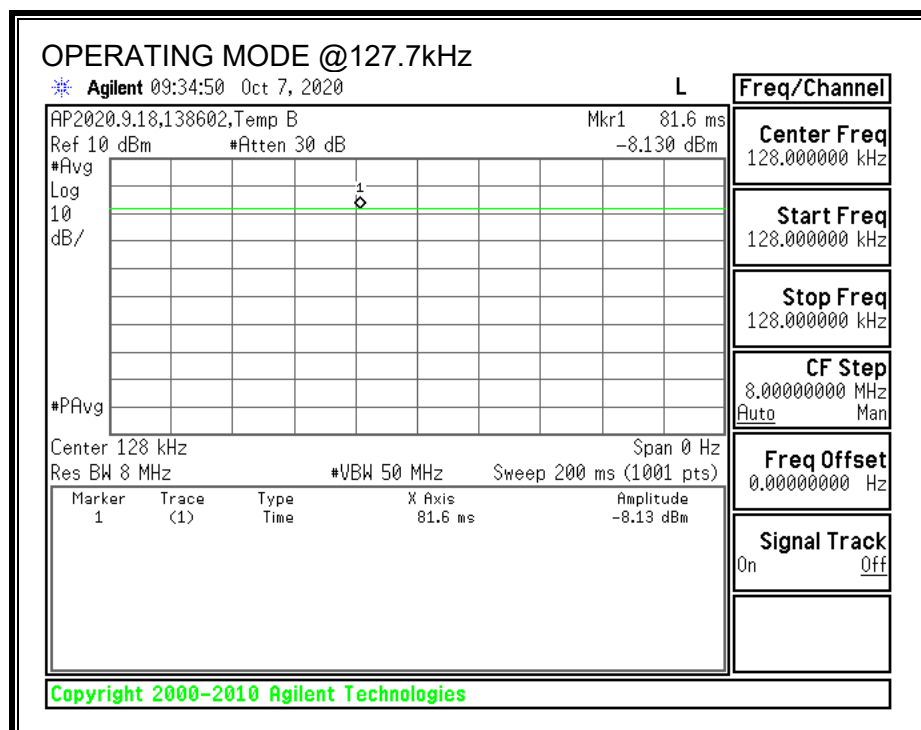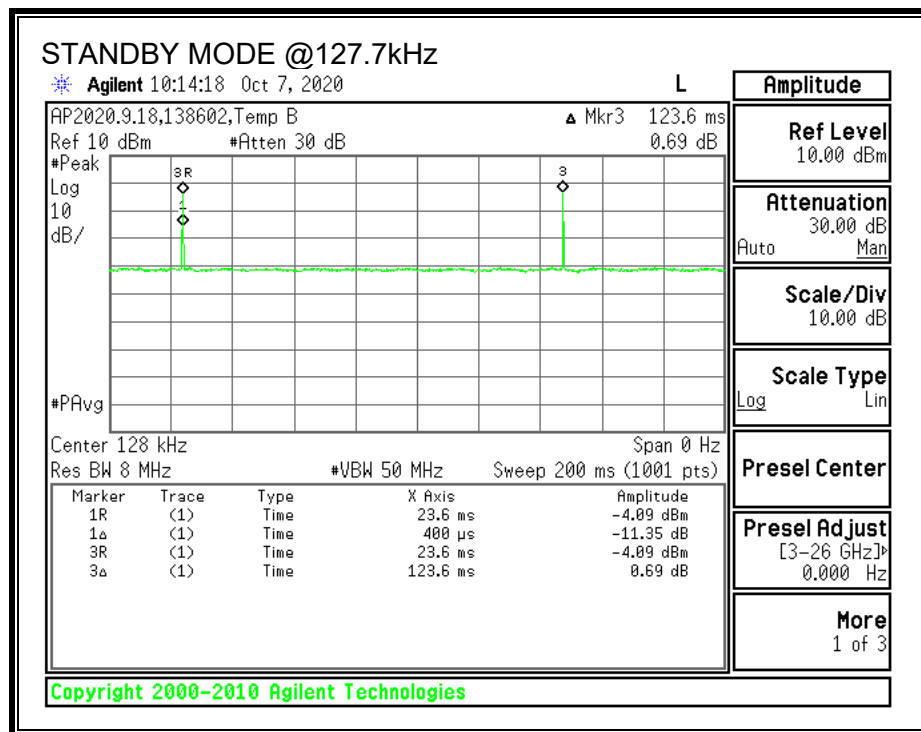

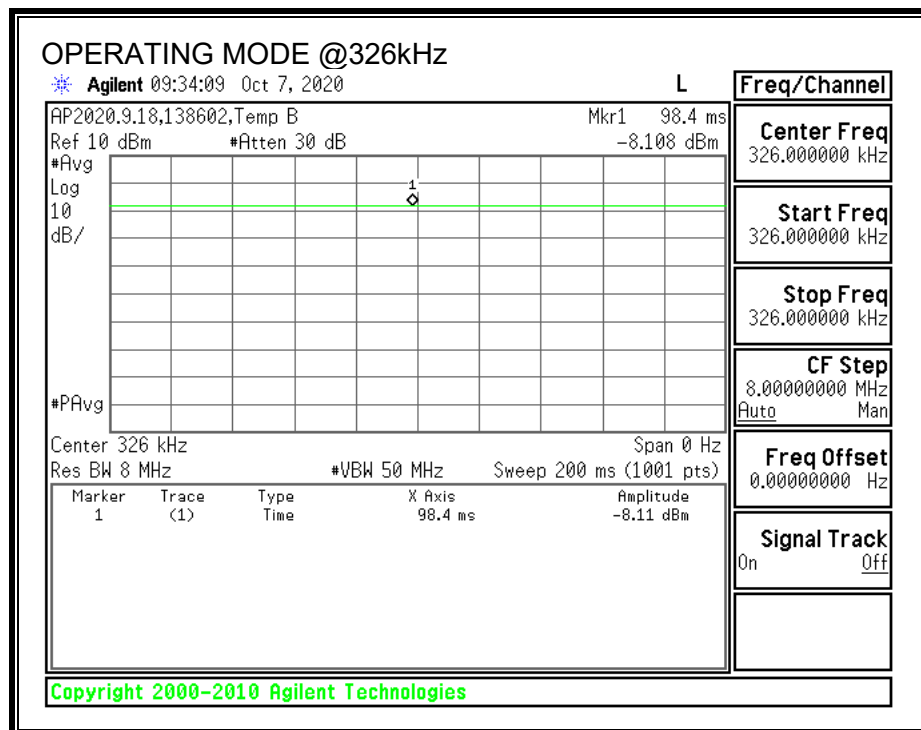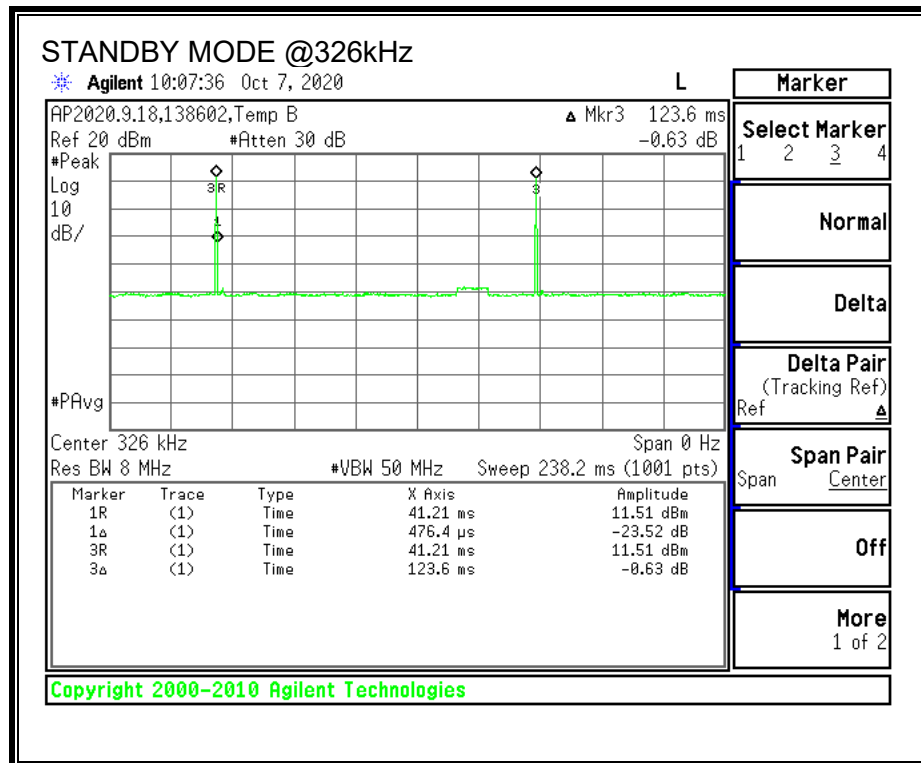

8. MAXIMUM PERMISSIBLE RF EXPOSURE

8.1. FCC LIMITS AND SUMMARY

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500			f/300	6
1500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30
1500–100,000			1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

RESULTS

ID:	38602	Date:	09/25/2020 - 10/07/2020
------------	-------	--------------	-------------------------

CONFIGURATION 1 (Standby Mode @ Flatbed Position):

@360kHz:

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	0.010	0.00%	1.63	0.015	0.90%

@127.7kHz

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	0.017	0.00%	1.63	0.002	0.13%

@326kHz

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	0.016	0.00%	1.63	0.006	0.38%

CONFIGURATION 2 (Operating Mode @ Flatbed Position, New iPhone):

@Direct Contact

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	0.274	0.04%	1.63	0.038	2.33%

@2mm Airgap & 2mm Shift to Top

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	0.514	0.08%	1.63	0.038	2.34%

@4mm Airgap & 4mm Shift to Top

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	0.273	0.04%	1.63	0.062	3.82%

@5mm Airgap & 5mm Shift to Top

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	0.357	0.06%	1.63	0.060	3.69%

CONFIGURATION 3 (Operating Mode @ Flatbed Position, Legacy iPhone):

@Direct Contact

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	0.252	0.04%	1.63	0.021	1.29%

@5mm Airgap & 5mm Shift to Top

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	0.273	0.04%	1.63	0.056	3.45%

CONFIGURATION 4 (Operating Mode @ Flatbed Position, AirPods):

@Direct Contact

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	0.392	0.06%	1.63	0.083	5.09%

@2mm Airgap & 5mm Shift to Top

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	0.266	0.04%	1.63	0.080	4.92%

CONFIGURATION 5 (Operating Mode @ Flatbed Position, iWatch):

@Direct Contact with New iWatch

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	0.127	0.02%	1.63	0.021	1.29%

@Direct Contact with Legacy iWatch

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	0.235	0.04%	1.63	0.097	5.96%

CONFIGURATION 6 (Standby Mode @ Folded Position):

@360kHz

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	0.015	0.00%	1.63	0.009	0.58%

@127.7kHz

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	0.019	0.00%	1.63	0.005	0.28%

@326kHz

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	0.015	0.00%	1.63	0.006	0.36%

CONFIGURATION 7 (Operating Mode @ Folded Position, New iPhone):

@Direct Contact

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	0.282	0.05%	1.63	0.038	2.33%

@2mm Airgap & 2mm Shift to Top

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	0.332	0.05%	1.63	0.051	3.13%

@4mm Airgap & 4mm Shift to Top

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	0.284	0.05%	1.63	0.062	3.82%

@5mm Airgap & 5mm Shift to Top

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	0.282	0.05%	1.63	0.068	4.17%

CONFIGURATION 8 (Operating Mode @ Folded Position, Legacy iPhone):

@Direct Contact

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	0.503	0.08%	1.63	0.039	2.40%

@5mm Airgap & 5mm Shift to Top

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	0.245	0.04%	1.63	0.048	2.96%

CONFIGURATION 9 (Operating Mode @ Folded Position, AirPods):

@Direct Contact

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	0.504	0.08%	1.63	0.019	1.17%

@2mm Airgap & 5mm Shift to Top

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	0.347	0.06%	1.63	0.089	5.48%

CONFIGURATION 10 (Operating Mode @ Folded Position, iWatch):

@Direct Contact with New iWatch

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	0.127	0.02%	1.63	0.020	1.23%

@Direct Contact with Legacy iWatch

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	0.235	0.04%	1.63	0.093	5.71%

CONFIGURATION 11 (Operating Mode @ Flatbed Position, New iPhone + iWatch):

@360kHz New iPhone with 4mm Airgap & 4mm Shift to Top

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	0.411	0.07%	1.63	0.072	4.42%

@326kHz iWatch with Direct Contact

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	0.120	0.02%	1.63	0.019	1.17%

CONFIGURATION 12 (Operating Mode @ Flatbed Position, Legacy iPhone + iWatch):

@127.7kHz Legacy iPhone with 5mm Airgap & 5mm Shift to Top

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	0.522	0.09%	1.63	0.098	6.03%

@326kHz iWatch with Direct Contact

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	0.111	0.02%	1.63	0.021	1.29%

CONFIGURATION 13 (Operating Mode @ Flatbed Position, AirPods + iWatch):

@127.7kHz AirPods with 2mm Airgap & 5mm Shift to Top

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	0.307	0.05%	1.63	0.084	5.15%

@326kHz iWatch with Direct Contact

Electric Field Limit			Magnetic Field Limit		
FCC RF Exposure Limit	Maximum Average (V/m)	Percentage (%)	FCC RF Exposure	Maximum Average (A/m)	Percentage (%)
614	0.111	0.02%	1.63	0.019	1.17%

E- FIELD AND H- FIELD MEASUREMENTS

Note: Peak measurements were performed. RMS values were calculated from the peak measurement. Please refer to the formula for calculating the RMS values: [Field Strength x $\sqrt{\text{Duty Cycle}}$].

CONFIGURATION 1 (Standby Mode @ Flatbed Position):

FCC Limit @360kHz													
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit (V/m)	Electric Field Reading (V/m)				Magnetic Field Limit (A/m)	Magnetic Field Reading (A/m)				
			FCC Limit	Location	Peak	Duty Cycle %	FCC Average	FCC Limit	Location	Peak	Duty Cycle %	FCC Average	
1	Standby	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.047	0.39	0.003	1.63	S1	0.218	0.39	0.014	
				S2	0.061		0.004		S2	0.226		0.014	
				S3	0.047		0.003		S3	0.227		0.014	
				S4	0.047		0.003		S4	0.235		0.015	
				Top	0.158		0.010		Top	0.235		0.015	
				Max	0.158		0.010		Max	0.235		0.015	
FCC Limit @128kHz													
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit (V/m)	Electric Field Reading (V/m)				Magnetic Field Limit (A/m)	Magnetic Field Reading (A/m)				
			FCC	Location	Peak	Duty Cycle %	FCC Average	FCC	Location	Peak	Duty Cycle %	FCC Average	
1	Standby	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.239	0.32	0.014	1.63	S1	0.036	0.32	0.002	
				S2	0.239		0.014		S2	0.037		0.002	
				S3	0.255		0.014		S3	0.036		0.002	
				S4	0.303		0.017		S4	0.037		0.002	
				Top	0.227		0.013		Top	0.037		0.002	
				Max	0.303		0.017		Max	0.037		0.002	
FCC Limit @326kHz													
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit (V/m)	Electric Field Reading (V/m)				Magnetic Field Limit (A/m)	Magnetic Field Reading (A/m)				
			FCC	Location	Peak	Duty Cycle %	FCC Average	FCC	Location	Peak	Duty Cycle %	FCC Average	
1	Standby	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.245	0.39	0.015	1.63	S1	0.044	0.39	0.003	
				S2	0.263		0.016		S2	0.036		0.002	
				S3	0.239		0.015		S3	0.038		0.002	
				S4	0.251		0.016		S4	0.052		0.003	
				Top	0.235		0.015		Top	0.099		0.006	
				Max	0.263		0.016		Max	0.099		0.006	

CONFIGURATION 2 (Operating Mode @ Flatbed Position, New iPhone):

FCC Limit @ Direct Contact													
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit	Electric Field Reading				Magnetic Field Limit	Magnetic Field Reading				
			(V/m)	(V/m)				(A/m)	(A/m)				
			FCC	Location	Peak	Duty Cycle %	FCC Average	FCC	Location	Peak	Duty Cycle %	FCC Average	
2	Operating Real Product (Power ~10% Charging)	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.236	100	0.236	1.63	S1	0.036	100	0.036	
				S2	0.226		0.226		S2	0.036		0.036	
				S3	0.266		0.266		S3	0.036		0.036	
				S4	0.254		0.254		S4	0.036		0.036	
				Top	0.273		0.273		Top	0.037		0.037	
				Max	0.273		0.273		Max	0.037		0.037	
				S1	0.266		0.266		S1	0.036		0.036	
	Operating Real Product (Power 20% ~ 60% Charging)			S2	0.245	0.245	S2		0.037	0.037			
				S3	0.227	0.227	S3		0.037	0.037			
				S4	0.254	0.254	S4		0.038	0.038			
				Top	0.245	0.245	Top		0.037	0.037			
				Max	0.266	0.266	Max		0.037	0.037			
				Operating Real Product (Power >75% Charging)	S1	0.253	0.253		S1	0.038	0.038		
					S2	0.236	0.236		S2	0.038	0.038		
	S3				0.235	0.235	S3		0.037	0.037			
	S4				0.274	0.274	S4		0.037	0.037			
	Top				0.273	0.273	Top		0.036	0.036			
	Max				0.274	0.274	Max		0.038	0.038			

FCC Limit @2mm Airgap & 2mm Shift to Top																				
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit (V/m)	Electric Field Reading (V/m)				Magnetic Field Limit (A/m)	Magnetic Field Reading (A/m)											
				FCC	Location	Peak	Duty Cycle %		FCC Average	FCC	Location	Peak	Duty Cycle %	FCC Average						
2	Operating Real Product (Power ~10% Charging) (2mm Airgap & 2mm Shift to the Top)	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.489	100	0.489	1.63	S1	0.036	100	0.036								
				S2	0.425		0.425		S2	0.037		0.037								
				S3	0.282		0.282		S3	0.036		0.036								
				S4	0.449		0.449		S4	0.037		0.037								
				Top	0.514		0.514		Top	0.035		0.035								
				Max	0.514		0.514		Max	0.036		0.036								
	Operating Real Product (Power 20% - 60% Charging) (2mm Airgap & 2mm Shift to the Top)			S1	0.473	100	0.473		S1	0.036	100	0.036								
				S2	0.389		0.389		S2	0.037		0.037								
				S3	0.274		0.274		S3	0.037		0.037								
				S4	0.431		0.431		S4	0.037		0.037								
				Top	0.465		0.465		Top	0.037		0.037								
				Max	0.473		0.473		Max	0.038		0.038								
	Operating Real Product (Power >75% Charging) (2mm Airgap & 2mm Shift to the Top)			S1	0.473	100	0.473		S1	0.036	100	0.036								
				S2	0.392		0.392		S2	0.036		0.036								
				S3	0.029		0.029		S3	0.036		0.036								
				S4	0.512		0.512		S4	0.037		0.037								
				Top	0.465		0.465		Top	0.036		0.036								
				Max	0.473		0.473		Max	0.037		0.037								

FCC Limit @4mm Airgap & 4mm Shift to Top													
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit (V/m)	Electric Field Reading (V/m)				Magnetic Field Limit (A/m)	Magnetic Field Reading (A/m)				
				FCC	Location	Peak	Duty Cycle %		FCC Average	FCC	Location	Peak	Duty Cycle %
			2	Operating Real Product (Power ~10% Charging) (4mm Airgap & 4mm Shift to the Top)	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.258	100	0.258	1.63	S1	0.038
S2	0.245	0.245					S2	0.062		0.062			
S3	0.265	0.265					S3	0.045		0.045			
S4	0.245	0.245					S4	0.057		0.057			
Top	0.245	0.245					Top	0.037		0.037			
Max	0.258	0.258					Max	0.062		0.062			
Operating Real Product (Power 20% - 60% Charging) (4mm Airgap & 4mm Shift to the Top)	S1	0.269		100			0.269	S1	0.040	100		0.040	
	S2	0.245					0.245	S2	0.062			0.062	
	S3	0.258					0.258	S3	0.051			0.051	
	S4	0.245					0.245	S4	0.057			0.057	
	Top	0.266					0.266	Top	0.036			0.036	
	Max	0.273					0.273	Max	0.062			0.062	
Operating Real Product (Power > 75% Charging) (4mm Airgap & 4mm Shift to the Top)	S1	0.266		100			0.266	S1	0.040	100		0.040	
	S2	0.236					0.236	S2	0.062			0.062	
	S3	0.266					0.266	S3	0.051			0.051	
	S4	0.245					0.245	S4	0.055			0.055	
	Top	0.266					0.266	Top	0.037			0.037	
	Max	0.269					0.269	Max	0.060			0.060	

FCC Limit @5mm Airgap & 5mm Shift to Top													
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit (V/m)	Electric Field Reading (V/m)				Magnetic Field Limit (A/m)	Magnetic Field Reading (A/m)				
				FCC	Location	Peak	Duty Cycle %		FCC Average	FCC	Location	Peak	Duty Cycle %
			2	Operating Real Product (Power ~10% Charging) (5mm Airgap & 5mm Shift to the Top)	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.273	100	0.273	1.63	S1	0.043
S2	0.245	0.245					S2	0.056		0.056			
S3	0.266	0.266					S3	0.036		0.036			
S4	0.274	0.274					S4	0.053		0.053			
Top	0.236	0.236					Top	0.036		0.036			
Max	0.274	0.274					Max	0.056		0.056			
Operating Real Product (Power 20- 60% Charging) (5mm Airgap & 5mm Shift to the Top)	S1	0.258		100			0.258	S1	0.044	100		0.044	
	S2	0.245					0.245	S2	0.055			0.055	
	S3	0.273					0.273	S3	0.037			0.037	
	S4	0.254					0.254	S4	0.052			0.052	
	Top	0.277					0.277	Top	0.036			0.036	
	Max	0.357					0.357	Max	0.060			0.060	
Operating Real Product (Power > 75% Charging) (5mm Airgap & 5mm Shift to the Top)	S1	0.266		100			0.266	S1	0.046	100		0.046	
	S2	0.236					0.236	S2	0.056			0.056	
	S3	0.266					0.266	S3	0.036			0.036	
	S4	0.274					0.274	S4	0.053			0.053	
	Top	0.273					0.273	Top	0.036			0.036	
	Max	0.277					0.277	Max	0.056			0.056	

CONFIGURATION 3 (Operating Mode @ Flatbed Position, Legacy iPhone):

FCC Limit @Direct Contact													
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit	Electric Field Reading				Magnetic Field Limit	Magnetic Field Reading				
			(V/m)	(V/m)				(A/m)	(A/m)				
			FCC	Location	Peak	Duty Cycle %	FCC Average	FCC	Location	Peak	Duty Cycle %	FCC Average	
3	Operating Real Product (Power ~10% Charging)	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.213	100	0.213	1.63	S1	0.021	100	0.021	
				S2	0.186		0.186		S2	0.018		0.018	
				S3	0.161		0.161		S3	0.019		0.019	
				S4	0.244		0.244		S4	0.021		0.021	
				Top	0.226		0.226		Top	0.019		0.019	
				Max	0.226		0.226		Max	0.021		0.021	
	Operating Real Product (Power 20% ~ 60% Charging)			S1	0.180	100	0.180		S1	0.019	100	0.019	
				S2	0.175		0.175		S2	0.018		0.018	
				S3	0.166		0.166		S3	0.019		0.019	
				S4	0.252		0.252		S4	0.019		0.019	
				Top	0.204		0.204		Top	0.021		0.021	
				Max	0.252		0.252		Max	0.021		0.021	
	Operating Real Product (Power >75% Charging)			S1	0.222	100	0.222		S1	0.021	100	0.021	
				S2	0.189		0.189		S2	0.019		0.019	
				S3	0.166		0.166		S3	0.018		0.018	
				S4	0.244		0.244		S4	0.019		0.019	
				Top	0.236		0.236		Top	0.019		0.019	
				Max	0.244		0.244		Max	0.021		0.021	

FCC Limit		@5mm Airgap & 5mm Shift to Top															
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit (V/m)	Electric Field Reading (V/m)				Magnetic Field Limit (A/m)	Magnetic Field Reading (A/m)								
			FCC	Location	Peak	Duty Cycle %	FCC Average	FCC	Location	Peak	Duty Cycle %	FCC Average					
3	Operating Real Product (Power ~10% Charging) (5mm Airgap & 5mm Shift to the Top)	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.218	100	0.218	1.63	S1	0.055	100	0.055					
				S2	0.189		0.189		S2	0.036		0.036					
				S3	0.193		0.193		S3	0.025		0.025					
				S4	0.232		0.232		S4	0.036		0.036					
				Top	0.204		0.204		Top	0.024		0.024					
				Max	0.232		0.232		Max	0.055		0.055					
	Operating Real Product (Power 20% ~ 60% Charging) (5mm Airgap & 5mm Shift to the Top)			S1	0.218	100	0.218		S1	0.056	100	0.056					
				S2	0.224		0.224		S2	0.038		0.038					
				S3	0.231		0.231		S3	0.024		0.024					
				S4	0.273		0.273		S4	0.036		0.036					
				Top	0.245		0.245		Top	0.026		0.026					
				Max	0.273		0.273		Max	0.056		0.056					
	Operating Real Product (Power >75% Charging) (5mm Airgap & 5mm Shift to the Top)			S1	0.270	100	0.270		S1	0.055	100	0.055					
				S2	0.198		0.198		S2	0.036		0.036					
				S3	0.189		0.189		S3	0.025		0.025					
				S4	0.244		0.244		S4	0.036		0.036					
				Top	0.214		0.214		Top	0.027		0.027					
				Max	0.270		0.270		Max	0.055		0.055					

CONFIGURATION 4 (Operating Mode @ Flatbed Position, Airpods):

FCC Limit @Direct Contact													
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit	Electric Field Reading				Magnetic Field Limit	Magnetic Field Reading				
			(V/m)	(V/m)				(A/m)	(A/m)				
			FCC	Location	Peak	Duty Cycle %	FCC Average	FCC	Location	Peak	Duty Cycle %	FCC Average	
4	Operating Real Product (Power ~10% Charging)	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.321	100	0.321	1.63	S1	0.044	100	0.044	
				S2	0.310		0.310		S2	0.083		0.083	
				S3	0.175		0.175		S3	0.017		0.017	
				S4	0.289		0.289		S4	0.067		0.067	
				Top	0.175		0.175		Top	0.049		0.049	
				Max	0.321		0.321		Max	0.083		0.083	
	Operating Real Product (Power 20% ~ 60% Charging)			S1	0.222	100	0.222		S1	0.043	100	0.043	
				S2	0.082		0.082		S2	0.083		0.083	
				S3	0.179		0.179		S3	0.018		0.018	
				S4	0.392		0.392		S4	0.031		0.031	
				Top	0.127		0.127		Top	0.041		0.041	
				Max	0.392		0.392		Max	0.083		0.083	
	Operating Real Product (Power >75% Charging)			S1	0.274	100	0.274		S1	0.033	100	0.033	
				S2	0.218		0.218		S2	0.054		0.054	
				S3	0.175		0.175		S3	0.019		0.019	
				S4	0.385		0.385		S4	0.044		0.044	
				Top	0.146		0.146		Top	0.052		0.052	
				Max	0.385		0.385		Max	0.054		0.054	

FCC Limit		@2mm Airgap & 5mm Shift to Top											
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit	Electric Field Reading				Magnetic Field Limit	Magnetic Field Reading				
			(V/m)	(V/m)				(A/m)	(A/m)				
			FCC	Location	Peak	Duty Cycle %	FCC Average	FCC	Location	Peak	Duty Cycle %	FCC Average	
4	Operating Real Product (Power ~10% Charging) (2mm Airgap & 5mm Shift to the Top)	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.264	100	0.264	1.63	S1	0.029	100	0.029	
				S2	0.218		0.218		S2	0.077		0.077	
				S3	0.224		0.224		S3	0.017		0.017	
				S4	0.218		0.218		S4	0.029		0.029	
				Top	0.156		0.156		Top	0.076		0.076	
				Max	0.264		0.264		Max	0.077		0.077	
				S1	0.222		0.222		S1	0.026		0.026	
				S2	0.266		0.266		S2	0.080		0.080	
	Operating Real Product (Power 20% ~ 60% Charging) (2mm Airgap & 5mm Shift to the Top)		S3	0.186	100	0.186	S3		0.018	100	0.018		
			S4	0.213		0.213	S4		0.030		0.030		
			Top	0.167		0.167	Top		0.073		0.073		
			Max	0.266		0.266	Max		0.080		0.080		
			S1	0.222		0.222	S1		0.029		0.029		
			S2	0.251		0.251	S2		0.077		0.077		
			S3	0.166		0.166	S3		0.019		0.019		
			S4	0.211		0.211	S4		0.030		0.030		
	Operating Real Product (Power >75% Charging) (2mm Airgap & 5mm Shift to the Top)		Top	0.175	100	0.175	Top		0.075	100	0.075		
			Max	0.251		0.251	Max		0.077		0.077		

CONFIGURATION 5 (Operating Mode @ Flatbed Position, iWatch):

FCC Limit		@Direct Contact with New iWatch										
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit	Electric Field Reading				Magnetic Field Limit	Magnetic Field Reading			
			(V/m)	(V/m)				(A/m)	(A/m)			
			FCC	Location	Peak	Duty Cycle %	FCC Average	FCC	Location	Peak	Duty Cycle %	FCC Average
5	Operating Real Product (Power ~10% Charging)	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.111	100	0.111	1.63	S1	0.019	100	0.019
				S2	0.115		S2		0.019			
				S3	0.120		S3		0.019			
				S4	0.120		S4		0.021			
				Top	0.120		Top		0.019			
				Max	0.120		Max		0.021			
	Operating Real Product (Power 20% ~ 60% Charging)			S1	0.118	100	0.118		S1	0.019	100	0.019
				S2	0.120		S2		0.021			
				S3	0.127		S3		0.020			
				S4	0.120		S4		0.020			
				Top	0.118		Top		0.019			
				Max	0.127		Max		0.021			
	Operating Real Product (Power >75% Charging)			S1	0.120	100	0.120		S1	0.019	100	0.019
				S2	0.111		S2		0.019			
				S3	0.120		S3		0.020			
				S4	0.120		S4		0.019			
				Top	0.120		Top		0.019			
				Max	0.120		Max		0.020			

FCC Limit		@Direct Contact with Legacy iWatch										
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit	Electric Field Reading				Magnetic Field Limit	Magnetic Field Reading			
			(V/m)	(V/m)				(A/m)	(A/m)			
			FCC	Location	Peak	Duty Cycle %	FCC Average	FCC	Location	Peak	Duty Cycle %	FCC Average
5	Operating Real Product (Power ~10% Charging)	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.235	100	0.235	1.63	S1	0.057	100	0.057
				S2	0.227		0.227		S2	0.054		0.054
				S3	0.235		0.235		S3	0.038		0.038
				S4	0.235		0.235		S4	0.050		0.050
				Top	0.235		0.235		Top	0.096		0.096
				Max	0.235		0.235		Max	0.096		0.096
	Operating Real Product (Power 20% ~ 60% Charging)			S1	0.235	100	0.235		S1	0.059	100	0.059
				S2	0.235		0.235		S2	0.057		0.057
				S3	0.235		0.235		S3	0.039		0.039
				S4	0.228		0.228		S4	0.050		0.050
				Top	0.235		0.235		Top	0.097		0.097
				Max	0.235		0.235		Max	0.097		0.097
	Operating Real Product (Power >75% Charging)			S1	0.227	100	0.227		S1	0.059	100	0.059
				S2	0.227		0.227		S2	0.057		0.057
				S3	0.227		0.227		S3	0.038		0.038
				S4	0.235		0.235		S4	0.054		0.054
				Top	0.235		0.235		Top	0.095		0.095
				Max	0.235		0.235		Max	0.095		0.095

CONFIGURATION 6 (Standby Mode @ Folded Position):

FCC Limit @360kHz													
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit	Electric Field Reading				Magnetic Field Limit	Magnetic Field Reading				
			(V/m)	(V/m)				(A/m)	(A/m)				
			FCC Limit	Location	Peak	Duty Cycle %	FCC Average	FCC Limit	Location	Peak	Duty Cycle %	FCC Average	
6	Standby	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.218	0.39	0.014	1.63	S1	0.054	0.39	0.003	
				S2	0.227		0.014		S2	0.069		0.004	
				S3	0.227		0.014		S3	0.058		0.004	
				S4	0.227		0.014		S4	0.046		0.003	
				Top	0.244		0.015		Top	0.151		0.009	
				Max	0.244		0.015		Max	0.151		0.009	
FCC Limit @ 128kHz													
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit	Electric Field Reading				Magnetic Field Limit	Magnetic Field Reading				
			(V/m)	(V/m)				(A/m)	(A/m)				
			FCC	Location	Peak	Duty Cycle %	FCC Average	FCC	Location	Peak	Duty Cycle %	FCC Average	
6	Standby	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.175	0.32	0.010	1.63	S1	0.062	0.32	0.004	
				S2	0.175		0.010		S2	0.082		0.005	
				S3	0.173		0.010		S3	0.068		0.004	
				S4	0.207		0.012		S4	0.076		0.004	
				Top	0.334		0.019		Top	0.073		0.004	
				Max	0.334		0.019		Max	0.082		0.005	
FCC Limit @ 326kHz													
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit	Electric Field Reading				Magnetic Field Limit	Magnetic Field Reading				
			(V/m)	(V/m)				(A/m)	(A/m)				
			FCC	Location	Peak	Duty Cycle %	FCC Average	FCC	Location	Peak	Duty Cycle %	FCC Average	
6	Standby	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.227	0.39	0.014	1.63	S1	0.072	0.39	0.004	
				S2	0.227		0.014		S2	0.093		0.006	
				S3	0.235		0.015		S3	0.072		0.004	
				S4	0.227		0.014		S4	0.068		0.004	
				Top	0.235		0.015		Top	0.085		0.005	
				Max	0.235		0.015		Max	0.093		0.006	

CONFIGURATION 7 (Operating Mode @ Folded Position, New iPhone):

FCC Limit		@Direct Contact											
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit	Electric Field Reading				Magnetic Field Limit	Magnetic Field Reading				
			(V/m)	(V/m)				(A/m)	(A/m)				
			FCC	Location	Peak	Duty Cycle %	FCC Average	FCC	Location	Peak	Duty Cycle %	FCC Average	
7	Operating Real Product (Power ~10% Charging)	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.258	100	0.258	1.63	S1	0.036	100	0.036	
				S2	0.245		S2		0.036				
				S3	0.266		S3		0.036				
				S4	0.237		S4		0.036				
				Top	0.254		Top		0.036				
				Max	0.258		Max		0.036				
	Operating Real Product (Power 20% ~ 60% Charging)			S1	0.282	100	0.282		S1	0.036	100	0.036	
				S2	0.245		S2		0.036				
				S3	0.258		S3		0.037				
				S4	0.245		S4		0.036				
				Top	0.266		Top		0.037				
				Max	0.282		Max		0.038				
	Operating Real Product (Power >75% Charging)			S1	0.236	100	0.236		S1	0.036	100	0.036	
				S2	0.245		S2		0.036				
				S3	0.245		S3		0.037				
				S4	0.228		S4		0.037				
				Top	0.253		Top		0.038				
				Max	0.253		Max		0.038				

FCC Limit		@2mm Airgap & 2mm Shift to Top											
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit	Electric Field Reading				Magnetic Field Limit	Magnetic Field Reading				
			(V/m)	(V/m)				(A/m)	(A/m)				
			FCC	Location	Peak	Duty Cycle %	FCC Average	FCC	Location	Peak	Duty Cycle %	FCC Average	
7	Operating Real Product (Power ~10% Charging) (2mm Airgap & 2mm Shift to the Top)	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.320	100	0.320	1.63	S1	0.049	100	0.049	
				S2	0.277		0.277		S2	0.040		0.040	
				S3	0.285		0.285		S3	0.044		0.044	
				S4	0.277		0.277		S4	0.040		0.040	
				Top	0.277		0.277		Top	0.037		0.037	
				Max	0.320		0.320		Max	0.049		0.049	
	Operating Real Product (Power 20% ~ 60% Charging) (2mm Airgap & 2mm Shift to the Top)			S1	0.332	0.332	S1		0.050	0.050			
				S2	0.301	0.301	S2		0.040	0.040			
				S3	0.292	0.292	S3		0.045	0.045			
				S4	0.277	0.277	S4		0.040	0.040			
				Top	0.314	0.314	Top		0.038	0.038			
				Max	0.332	0.332	Max		0.051	0.051			
	Operating Real Product (Power >75% Charging) (2mm Airgap & 2mm Shift to the Top)			S1	0.325	0.325	S1		0.044	0.044			
				S2	0.277	0.277	S2		0.040	0.040			
				S3	0.301	0.301	S3		0.050	0.050			
				S4	0.266	0.266	S4		0.043	0.043			
				Top	0.282	0.282	Top		0.037	0.037			
				Max	0.325	0.325	Max		0.050	0.050			

FCC Limit @4mm Airgap & 4mm Shift to Top												
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit (V/m)	Electric Field Reading (V/m)				Magnetic Field Limit (A/m)	Magnetic Field Reading (A/m)			
				FCC	Location	Peak	Duty Cycle %		FCC Average	FCC	Location	Peak
			7	Operating Real Product (Power ~10% Charging) (4mm Airgap & 4mm Shift to the Top)	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.269	100	0.269	1.63	S1
S2	0.258	0.258					S2	0.057		0.057		
S3	0.266	0.266					S3	0.040		0.040		
S4	0.282	0.282					S4	0.059		0.059		
Top	0.262	0.262					Top	0.036		0.036		
Max	0.269	0.269					Max	0.059		0.059		
S1	0.273	0.273					S1	0.040		0.040		
S2	0.258	0.258					S2	0.060		0.060		
Operating Real Product (Power 20% ~ 60% Charging) (4mm Airgap & 4mm Shift to the Top)	S3	0.253		100			0.253	S3	0.040	100		0.040
	S4	0.266					0.266	S4	0.060			0.060
	Top	0.284					0.284	Top	0.037			0.037
	Max	0.284					0.284	Max	0.060			0.060
	S1	0.269					0.269	S1	0.040			0.040
	S2	0.266					0.266	S2	0.059			0.059
	S3	0.266					0.266	S3	0.040			0.040
	S4	0.274					0.274	S4	0.062			0.062
Operating Real Product (Power > 75% Charging) (4mm Airgap & 4mm Shift to the Top)	Top	0.253		100			0.253	Top	0.037	100		0.037
	Max	0.274					0.274	Max	0.062			0.062

FCC Limit @5mm Airgap & 5mm Shift to Top												
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit (V/m)	Electric Field Reading (V/m)				Magnetic Field Limit (A/m)	Magnetic Field Reading (A/m)			
				FCC	Location	Peak	Duty Cycle %		FCC Average	FCC	Location	Peak
			7	Operating Real Product (Power ~10% Charging) (5mm Airgap & 5mm Shift to the Top)	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.258	100	0.258	1.63	S1
S2	0.266	0.266					S2	0.067		0.067		
S3	0.266	0.266					S3	0.042		0.042		
S4	0.274	0.274					S4	0.059		0.059		
Top	0.243	0.243					Top	0.036		0.036		
Max	0.274	0.274					Max	0.067		0.067		
Operating Real Product (Power 20% ~ 60% Charging) (5mm Airgap & 5mm Shift to the Top)	S1	0.266		100			0.266	S1	0.040	0.040		
	S2	0.266					0.266	S2	0.068	0.068		
	S3	0.282					0.282	S3	0.042	0.042		
	S4	0.266					0.266	S4	0.062	0.062		
	Top	0.274					0.274	Top	0.037	0.037		
	Max	0.282					0.282	Max	0.068	0.068		
Operating Real Product (Power > 75% Charging) (5mm Airgap & 5mm Shift to the Top)	S1	0.277		100			0.277	S1	0.040	0.040		
	S2	0.266					0.266	S2	0.068	0.068		
	S3	0.273					0.273	S3	0.042	0.042		
	S4	0.273					0.273	S4	0.060	0.060		
	Top	0.267					0.267	Top	0.038	0.038		
	Max	0.277					0.277	Max	0.068	0.068		

CONFIGURATION 8 (Operating Mode @ Folded Position, Legacy iPhone):

FCC Limit @Direct Contact													
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit	Electric Field Reading				Magnetic Field Limit	Magnetic Field Reading				
			(V/m)	(V/m)				(A/m)	(A/m)				
			FCC	Location	Peak	Duty Cycle %	FCC Average	FCC	Location	Peak	Duty Cycle %	FCC Average	
8	Operating Real Product (Power ~10% Charging)	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.193	100	0.193	1.63	S1	0.039	100	0.039	
				S2	0.178		0.178		S2	0.019		0.019	
				S3	0.213		0.213		S3	0.025		0.025	
				S4	0.485		0.485		S4	0.027		0.027	
				Top	0.226		0.226		Top	0.026		0.026	
				Max	0.485		0.485		Max	0.039		0.039	
	Operating Real Product (Power 20% ~ 60% Charging)			S1	0.186	100	0.186		S1	0.036	100	0.036	
				S2	0.168		0.168		S2	0.019		0.019	
				S3	0.186		0.186		S3	0.025		0.025	
				S4	0.503		0.503		S4	0.027		0.027	
				Top	0.189		0.189		Top	0.025		0.025	
				Max	0.503		0.503		Max	0.036		0.036	
	Operating Real Product (Power >75% Charging)			S1	0.180	100	0.180		S1	0.037	100	0.037	
				S2	0.188		0.188		S2	0.019		0.019	
				S3	0.213		0.213		S3	0.026		0.026	
				S4	0.469		0.469		S4	0.027		0.027	
				Top	0.226		0.226		Top	0.026		0.026	
				Max	0.469		0.469		Max	0.037		0.037	

FCC Limit		@ 5mm Airgap & 5mm Shift to Top											
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit	Electric Field Reading				Magnetic Field Limit	Magnetic Field Reading				
			(V/m)	(V/m)			(A/m)	(A/m)					
			FCC	Location	Peak	Duty Cycle %	FCC Average	FCC	Location	Peak	Duty Cycle %	FCC Average	
8	Operating Real Product (Power ~10% Charging) (5mm Airgap & 5mm Shift to the Top)	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.189	100	0.189	1.63	S1	0.040	100	0.040	
				S2	0.175		0.175		S2	0.045		0.045	
				S3	0.213		0.213		S3	0.033		0.033	
				S4	0.231		0.231		S4	0.040		0.040	
				Top	0.186		0.186		Top	0.023		0.023	
				Max	0.231		0.231		Max	0.045		0.045	
	Operating Real Product (Power 20% ~ 60% Charging) (5mm Airgap & 5mm Shift to the Top)			S1	0.213	100	0.213		S1	0.036	100	0.036	
				S2	0.195		0.195		S2	0.048		0.048	
				S3	0.213		0.213		S3	0.033		0.033	
				S4	0.245		0.245		S4	0.040		0.040	
				Top	0.204		0.204		Top	0.019		0.019	
				Max	0.245		0.245		Max	0.048		0.048	
	Operating Real Product (Power >75% Charging) (5mm Airgap & 5mm Shift to the Top)			S1	0.213	100	0.213		S1	0.039	100	0.039	
				S2	0.189		0.189		S2	0.048		0.048	
				S3	0.226		0.226		S3	0.033		0.033	
				S4	0.239		0.239		S4	0.040		0.040	
				Top	0.198		0.198		Top	0.021		0.021	
				Max	0.239		0.239		Max	0.048		0.048	

CONFIGURATION 9 (Operating Mode @ Folded Position, AirPods):

FCC Limit @ Direct Contact													
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit	Electric Field Reading				Magnetic Field Limit	Magnetic Field Reading				
			(V/m)	(V/m)				(A/m)	(A/m)				
			FCC	Location	Peak	Duty Cycle %	FCC Average	FCC	Location	Peak	Duty Cycle %	FCC Average	
9	Operating Real Product (Power ~10% Charging)	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.184	100	0.184	1.63	S1	0.018	100	0.018	
				S2	0.199		0.199		S2	0.019		0.019	
				S3	0.161		0.161		S3	0.018		0.018	
				S4	0.446		0.446		S4	0.019		0.019	
				Top	0.156		0.156		Top	0.017		0.017	
				Max	0.446		0.446		Max	0.019		0.019	
	Operating Real Product (Power 20% ~ 60% Charging)			S1	0.201	100	0.201		S1	0.019	100	0.019	
				S2	0.195		0.195		S2	0.017		0.017	
				S3	0.166		0.166		S3	0.017		0.017	
				S4	0.495		0.495		S4	0.019		0.019	
				Top	0.137		0.137		Top	0.019		0.019	
				Max	0.495		0.495		Max	0.019		0.019	
	Operating Real Product (Power >75% Charging)			S1	0.222	100	0.222		S1	0.017	100	0.017	
				S2	0.209		0.209		S2	0.017		0.017	
				S3	0.189		0.189		S3	0.019		0.019	
				S4	0.504		0.504		S4	0.017		0.017	
				Top	0.173		0.173		Top	0.019		0.019	
				Max	0.504		0.504		Max	0.019		0.019	

FCC Limit @2mm Airgap & 5mm Shift to Top													
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit (V/m)	Electric Field Reading (V/m)				Magnetic Field Limit (A/m)	Magnetic Field Reading (A/m)				
				FCC	Location	Peak	Duty Cycle %		FCC Average	FCC	Location	Peak	Duty Cycle %
			9	Operating Real Product (Power ~10% Charging) (2mm Airgap & 5mm Shift to the Top)	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.206	100	0.206	1.63	S1	0.026
S2	0.219	0.219					S2	0.086		0.086			
S3	0.219	0.219					S3	0.033		0.033			
S4	0.331	0.331					S4	0.028		0.028			
Top	0.222	0.222					Top	0.062		0.062			
Max	0.331	0.331					Max	0.086		0.086			
Operating Real Product (Power 25% ~ 60% Charging) (2mm Airgap & 5mm Shift to the Top)	S1	0.206		100			0.206	S1	0.030	100		0.030	
	S2	0.224					0.224	S2	0.089			0.089	
	S3	0.211					0.211	S3	0.033			0.033	
	S4	0.347					0.347	S4	0.028			0.028	
	Top	0.235					0.235	Top	0.071			0.071	
	Max	0.347					0.347	Max	0.089			0.089	
Operating Real Product (Power >75% Charging) (2mm Airgap & 5mm Shift to the Top)	S1	0.224		100			0.224	S1	0.029	100		0.029	
	S2	0.224					0.224	S2	0.089			0.089	
	S3	0.219					0.219	S3	0.038			0.038	
	S4	0.340					0.340	S4	0.028			0.028	
	Top	0.225					0.225	Top	0.071			0.071	
	Max	0.340					0.340	Max	0.089			0.089	

CONFIGURATION 10 (Operating Mode @ Folded Position, iWatch):

FCC Limit		@Direct Contact with New iWatch										
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit	Electric Field Reading				Magnetic Field Limit	Magnetic Field Reading			
			(V/m)	(V/m)				(A/m)	(A/m)			
			FCC	Location	Peak	Duty Cycle %	FCC Average	FCC	Location	Peak	Duty Cycle %	FCC Average
10	Operating Real Product (Power ~10% Charging)	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.120	100	0.120	1.63	S1	0.017	100	0.017
				S2	0.120		0.120		S2	0.019		0.019
				S3	0.120		0.120		S3	0.019		0.019
				S4	0.122		0.122		S4	0.019		0.019
				Top	0.120		0.120		Top	0.019		0.019
				Max	0.122		0.122		Max	0.020		0.020
	Operating Real Product (Power 20% ~ 60% Charging)			S1	0.120	100	0.120		S1	0.019	100	0.019
				S2	0.127		0.127		S2	0.020		0.020
				S3	0.120		0.120		S3	0.019		0.019
				S4	0.120		0.120		S4	0.020		0.020
				Top	0.120		0.120		Top	0.019		0.019
				Max	0.127		0.127		Max	0.020		0.020
	Operating Real Product (Power >75% Charging)			S1	0.122	100	0.122		S1	0.019	100	0.019
				S2	0.111		0.111		S2	0.019		0.019
				S3	0.120		0.120		S3	0.019		0.019
				S4	0.120		0.120		S4	0.019		0.019
				Top	0.120		0.120		Top	0.019		0.019
				Max	0.122		0.122		Max	0.019		0.019

FCC Limit		@Direct Contact with Legacy iWatch																	
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit	Electric Field Reading				Magnetic Field Limit	Magnetic Field Reading										
			(V/m)	(V/m)				(A/m)	(A/m)										
			FCC	Location	Peak	Duty Cycle %	FCC Average	FCC	Location	Peak	Duty Cycle %	FCC Average							
10	Operating Real Product (Power ~10% Charging)	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.235	100	0.235	1.63	S1	0.072	100	0.072							
				S2	0.227		0.227		S2	0.091		0.091							
				S3	0.227		0.227		S3	0.068		0.068							
				S4	0.227		0.227		S4	0.060		0.060							
				Top	0.227		0.227		Top	0.071		0.071							
				Max	0.235		0.235		Max	0.091		0.091							
	Operating Real Product (Power 20% ~ 60% Charging)			S1	0.235	100	0.235		S1	0.068	100	0.068							
				S2	0.227		0.227		S2	0.090		0.090							
				S3	0.235		0.235		S3	0.072		0.072							
				S4	0.227		0.227		S4	0.068		0.068							
				Top	0.227		0.227		Top	0.067		0.067							
				Max	0.235		0.235		Max	0.090		0.090							
	Operating Real Product (Power >75% Charging)			S1	0.227	100	0.227		S1	0.072	100	0.072							
				S2	0.227		0.227		S2	0.093		0.093							
				S3	0.227		0.227		S3	0.070		0.070							
				S4	0.235		0.235		S4	0.066		0.066							
				Top	0.235		0.235		Top	0.071		0.071							
				Max	0.235		0.235		Max	0.093		0.093							

CONFIGURATION 11 (Operating Mode @ Flatbed Position, New iPhone + iWatch):

FCC Limit @ 360kHz New iPhone with 4mm Airgap & 4mm Shift to Top												
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit	Electric Field Reading				Magnetic Field Limit	Magnetic Field Reading			
			(V/m)	(V/m)				(A/m)	(A/m)			
			FCC	Location	Peak	Duty Cycle %	FCC Average	FCC	Location	Peak	Duty Cycle %	FCC Average
11	Operating Real Product (Power ~10% Charging) (4mm Airgap & 4mm Shift to the Top)	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.180	100	0.180	1.63	S1	0.049	100	0.049
				S2	0.205		0.205		S2	0.069		0.069
				S3	0.131		0.131		S3	0.021		0.021
				S4	0.386		0.386		S4	0.048		0.048
				Top	0.213		0.213		Top	0.021		0.021
				Max	0.386		0.386		Max	0.069		0.069
	Operating Real Product (Power 20% ~ 60% Charging) (4mm Airgap & 4mm Shift to the Top)			S1	0.195	100	0.195		S1	0.050	100	0.050
				S2	0.221		0.221		S2	0.072		0.072
				S3	0.122		0.122		S3	0.021		0.021
				S4	0.411		0.411		S4	0.040		0.040
				Top	0.179		0.179		Top	0.022		0.022
				Max	0.411		0.411		Max	0.072		0.072
	Operating Real Product (Power >75% Charging) (4mm Airgap & 4mm Shift to the Top)			S1	0.195	100	0.195		S1	0.047	100	0.047
				S2	0.193		0.193		S2	0.069		0.069
				S3	0.160		0.160		S3	0.020		0.020
				S4	0.406		0.406		S4	0.047		0.047
				Top	0.188		0.188		Top	0.022		0.022
				Max	0.406		0.406		Max	0.069		0.069

FCC Limit @ 326kHz iWatch with Direct Contact												
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit	Electric Field Reading				Magnetic Field Limit	Magnetic Field Reading			
			(V/m)	(V/m)				(A/m)	(A/m)			
			FCC	Location	Peak	Duty Cycle %	FCC Average	FCC	Location	Peak	Duty Cycle %	FCC Average
11	Operating Real Product (Power ~10% Charging)	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.111	100	0.111	1.63	S1	0.015	100	0.015
				S2	0.100		0.100		S2	0.015		0.015
				S3	0.100		0.100		S3	0.015		0.015
				S4	0.100		0.100		S4	0.017		0.017
				Top	0.108		0.108		Top	0.017		0.017
				Max	0.111		0.111		Max	0.017		0.017
	Operating Real Product (Power 20% ~ 60% Charging)			S1	0.111	100	0.111		S1	0.015	100	0.015
				S2	0.111		0.111		S2	0.019		0.019
				S3	0.111		0.111		S3	0.015		0.015
				S4	0.120		0.120		S4	0.015		0.015
				Top	0.115		0.115		Top	0.015		0.015
				Max	0.120		0.120		Max	0.019		0.019
	Operating Real Product (Power >75% Charging)			S1	0.111	100	0.111		S1	0.015	100	0.015
				S2	0.111		0.111		S2	0.017		0.017
				S3	0.100		0.100		S3	0.015		0.015
				S4	0.111		0.111		S4	0.015		0.015
				Top	0.115		0.115		Top	0.015		0.015
				Max	0.115		0.115		Max	0.017		0.017

CONFIGURATION 12 (Operating Mode @ Flatbed Position, Legacy iPhone + iWatch):

FCC Limit @ 128kHz Legacy iPhone with 5mm Airgap & 5mm Shift to Top												
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit	Electric Field Reading				Magnetic Field Limit	Magnetic Field Reading			
			(V/m)	(V/m)				(A/m)	(A/m)			
			FCC	Location	Peak	Duty Cycle %	FCC Average	FCC	Location	Peak	Duty Cycle %	FCC Average
12	Operating Real Product (Power ~10% Charging) (5mm Airgap & 5mm Shift to the Top)	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.231	100	0.231	1.63	S1	0.059	100	0.059
				S2	0.198		0.198		S2	0.073		0.073
				S3	0.166		0.166		S3	0.026		0.026
				S4	0.422		0.422		S4	0.098		0.098
				Top	0.173		0.173		Top	0.030		0.030
				Max	0.422		0.422		Max	0.098		0.098
	Operating Real Product (Power 20% ~ 60% Charging) (5mm Airgap & 5mm Shift to the Top)			S1	0.284	0.284	S1		0.056	0.056		
				S2	0.198	0.198	S2		0.086	0.086		
				S3	0.189	0.189	S3		0.026	0.026		
				S4	0.522	0.522	S4		0.098	0.098		
				Top	0.209	0.209	Top		0.034	0.034		
				Max	0.522	0.522	Max		0.098	0.098		
	Operating Real Product (Power >75% Charging) (5mm Airgap & 5mm Shift to the Top)			S1	0.284	0.284	S1		0.059	0.059		
				S2	0.231	0.231	S2		0.067	0.067		
				S3	0.193	0.193	S3		0.025	0.025		
				S4	0.491	0.491	S4		0.098	0.098		
				Top	0.179	0.179	Top		0.030	0.030		
				Max	0.491	0.491	Max		0.098	0.098		

FCC Limit @ 326kHz iWatch with Direct Contact												
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit	Electric Field Reading				Magnetic Field Limit	Magnetic Field Reading			
			(V/m)	(V/m)				(A/m)	(A/m)			
			FCC	Location	Peak	Duty Cycle %	FCC Average	FCC	Location	Peak	Duty Cycle %	FCC Average
12	Operating Real Product (Power ~10% Charging)	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.077	100	0.077	1.63	S1	0.015	100	0.015
				S2	0.084		0.084		S2	0.018		0.018
				S3	0.094		0.094		S3	0.017		0.017
				S4	0.077		0.077		S4	0.017		0.017
				Top	0.085		0.085		Top	0.015		0.015
				Max	0.094		0.094		Max	0.018		0.018
	Operating Real Product (Power 20% ~ 60% Charging)			S1	0.111	100	0.111		S1	0.015	100	0.015
				S2	0.100		0.100		S2	0.018		0.018
				S3	0.094		0.094		S3	0.015		0.015
				S4	0.054		0.054		S4	0.021		0.021
				Top	0.094		0.094		Top	0.016		0.016
				Max	0.094		0.094		Max	0.021		0.021
	Operating Real Product (Power >75% Charging)			S1	0.094	100	0.094		S1	0.015	100	0.015
				S2	0.100		0.100		S2	0.015		0.015
				S3	0.100		0.100		S3	0.015		0.015
				S4	0.111		0.111		S4	0.017		0.017
				Top	0.100		0.100		Top	0.015		0.015
				Max	0.111		0.111		Max	0.017		0.017

CONFIGURATION 13 (Operating Mode @ Flatbed Position, AirPods + iWatch):

FCC Limit @ 128kHz AirPods with 2mm Airgap & 5mm Shift to Top												
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit	Electric Field Reading				Magnetic Field Limit	Magnetic Field Reading			
			(V/m)	(V/m)				(A/m)	(A/m)			
			FCC	Location	Peak	Duty Cycle %	FCC Average	FCC	Location	Peak	Duty Cycle %	FCC Average
13	Operating Real Product (Power ~10% Charging) (2mm Airgap & 5mm Shift to the Top)	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.218	100	0.218	1.63	S1	0.037	100	0.037
				S2	0.199		0.199		S2	0.084		0.084
				S3	0.166		0.166		S3	0.020		0.020
				S4	0.307		0.307		S4	0.028		0.028
				Top	0.214		0.214		Top	0.069		0.069
				Max	0.307		0.307		Max	0.084		0.084
	Operating Real Product (Power 20% ~ 60% Charging) (2mm Airgap & 5mm Shift to the Top)			S1	0.226	100	0.226		S1	0.035	100	0.035
				S2	0.206		0.206		S2	0.084		0.084
				S3	0.168		0.168		S3	0.022		0.022
				S4	0.292		0.292		S4	0.028		0.028
				Top	0.181		0.181		Top	0.020		0.020
				Max	0.292		0.292		Max	0.084		0.084
	Operating Real Product (Power >75% Charging) (2mm Airgap 5 2mm Shift to the Top)			S1	0.219	100	0.219		S1	0.045	100	0.045
				S2	0.199		0.199		S2	0.075		0.075
				S3	0.166		0.166		S3	0.021		0.021
				S4	0.292		0.292		S4	0.042		0.042
				Top	0.222		0.222		Top	0.020		0.020
				Max	0.029		0.029		Max	0.075		0.075

FCC Limit @ 326kHz iWatch with Direct Contact												
Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit	Electric Field Reading				Magnetic Field Limit	Magnetic Field Reading			
			(V/m)	(V/m)				(A/m)	(A/m)			
			FCC	Location	Peak	Duty Cycle %	FCC Average	FCC	Location	Peak	Duty Cycle %	FCC Average
13	Operating Real Product (Power ~10% Charging)	15 cm surrounding the device (S1 - S4) and 20 cm above the top surface of the EUT	614	S1	0.111	100	0.111	1.63	S1	0.015	100	0.015
				S2	0.105		0.105		S2	0.017		0.017
				S3	0.100		0.100		S3	0.015		0.015
				S4	0.094		0.094		S4	0.017		0.017
				Top	0.100		0.100		Top	0.017		0.017
				Max	0.111		0.111		Max	0.017		0.017
	Operating Real Product (Power 20% ~ 60% Charging)			S1	0.100	100	0.100		S1	0.017	100	0.017
				S2	0.105		0.105		S2	0.019		0.019
				S3	0.100		0.100		S3	0.015		0.015
				S4	0.084		0.084		S4	0.017		0.017
				Top	0.094		0.094		Top	0.015		0.015
				Max	0.105		0.105		Max	0.019		0.019
	Operating Real Product (Power >75% Charging)			S1	0.111	100	0.111		S1	0.015	100	0.015
				S2	0.111		0.111		S2	0.017		0.017
				S3	0.105		0.105		S3	0.015		0.015
				S4	0.100		0.100		S4	0.019		0.019
				Top	0.111		0.111		Top	0.015		0.015
				Max	0.111		0.111		Max	0.019		0.019

9. SETUP PHOTO

Please see setup photo report 13371062-EP1V1

END OF TEST REPORT