

## DATA REFERENCE REPORT

### FCC PART 15.407 / ISSED RSS-247 DFS

**Applicant Name:**

Apple Inc.  
One Apple Park Way  
Cupertino, CA 95014  
United States

**Date of Testing:**

12/12/2020 - 03/19/2021

**Test Site/Location:**

PCTEST, Morgan Hill, CA, USA

**Test Report Serial No.:**

1C2101020006-15.BCG

**FCC ID:**

**BCGA2461**

**IC:**

**579C-A2461**

**APPLICANT:**

**Apple Inc.**

**Reference Model/HVIN:**

A2379

**Variant Mode/HVIN:**

A2461, A2462

**EUT Type:**

Client Only Device, No Radar Detection Capability

**Frequency Range:**

5250 – 5350 MHz (UNII-2A Band)

5470 – 5725 MHz (UNII-2C Band)

**FCC Classification:**

Unlicensed National Information Infrastructure (UNII)

**FCC Rule Part(s):**

Part 15 Subpart E (15.407)

**ISED Specification:**


RSS-247 Issue 2

**Test Procedure(s):**

KDB 905462 D02 v02

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 905462 D02 v02 Compliance Measurement Procedures for Unlicensed-National Information Infrastructure Devices Operating in the 5.25 – 5.35 GHz and 5.47 – 5.725 GHz Bands Incorporating Dynamic Frequency Selection. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez  
President



|                                                  |                                                                                                                  |                                   |                                        |
|--------------------------------------------------|------------------------------------------------------------------------------------------------------------------|-----------------------------------|----------------------------------------|
| <b>FCC ID:</b> BCGA2461<br><b>IC:</b> 579C-A2461 |  <b>DATA REFERENCE REPORT</b> |                                   | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C2101020006-15.BCG   | <b>Test Dates:</b><br>12/12/2020 - 03/19/2021                                                                    | <b>EUT Type:</b><br>Tablet Device | Page 1 of 7                            |

## T A B L E O F C O N T E N T S

|     |                                               |   |
|-----|-----------------------------------------------|---|
| 1.0 | INTRODUCTION .....                            | 3 |
| 1.1 | SCOPE .....                                   | 3 |
| 1.2 | PCTEST TEST LOCATION .....                    | 3 |
| 1.3 | TEST FACILITY / ACCREDITATIONS.....           | 3 |
| 2.0 | PRODUCT INFORMATION .....                     | 4 |
| 2.1 | EQUIPMENT DESCRIPTION .....                   | 4 |
| 2.2 | DEVICE CAPABILITIES .....                     | 4 |
| 2.3 | ANTENNA DESCRIPTION .....                     | 5 |
| 2.4 | MASTER PARAMETERS .....                       | 5 |
| 3.0 | CONCLUSION .....                              | 6 |
| 4.0 | APPENDIX A: REFERENCE MODEL TEST REPORT ..... | 7 |

|                                                  |                                                                                                                                                                                                                      |                                   |                                        |
|--------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|----------------------------------------|
| <b>FCC ID:</b> BCGA2461<br><b>IC:</b> 579C-A2461 |  <b>PCTEST</b><br>Proud to be part of  element | <b>DATA REFERENCE REPORT</b>      | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C2101020006-15.BCG   | <b>Test Dates:</b><br>12/12/2020 - 03/19/2021                                                                                                                                                                        | <b>EUT Type:</b><br>Tablet Device | Page 2 of 7                            |

## 1.0 INTRODUCTION

### 1.1 Scope

Per manufacturer declaration, there are two tablet device models, A2379 and A2461(A2462), with high degree of similarity, reference model FCC ID: BCGA2379 / IC: 579C-A2379 and variant model **FCC ID: BCGA2461 / IC: 579C-A2461**. The reference model supports mmWave operations, while the variant model has the mmWave components/antennas removed. Both models share the same material, form factor, circuit design, and components, including antennas and their locations. The reference and variant models use the same power tables and have same tune-up tolerances.

Per FCC/ISED approved Data Referencing Test Plan, testing was done fully on the reference model FCC ID: BCGA2379 / IC: 579C-A2379, while all DFS data for variant model **FCC ID: BCGA2461 / IC: 579C-A2461** can be fully referenced from the reference model.

| Equipment Class | Reference Model<br>FCC ID & IC | Reference Report    | Report Title       |
|-----------------|--------------------------------|---------------------|--------------------|
| NII             | BCGA2379<br>579C- A2379        | 1C2101020005-14.BCG | RF DFS Test Report |

**Table 1-1. Reference Model Details**

Reference model FCC ID: BCGA2379 / IC: 579C-A2379 test report has been included in Appendix A.

### 1.2 PCTEST test location

These measurement tests were conducted at the PCTEST facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

### 1.3 Test facility / accreditations

**Measurements were performed at PCTEST located in Morgan Hill, CA 95037, U.S.A.**

- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISED.

|                                         |                                                                                                                                                                                                              |                              |                                        |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|----------------------------------------|
| FCC ID: BCGA2461<br>IC: 579C-A2461      |  <b>PCTEST</b><br>Proud to be part of  | <b>DATA REFERENCE REPORT</b> | <b>Approved by:</b><br>Quality Manager |
| Test Report S/N:<br>1C2101020006-15.BCG | Test Dates:<br>12/12/2020 - 03/19/2021                                                                                                                                                                       | EUT Type:<br>Tablet Device   | Page 3 of 7                            |

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA2461, IC: 579C-A2461.**

**Mode of Operation:**

|                                    |                                     |
|------------------------------------|-------------------------------------|
| Master Device                      | <input type="checkbox"/>            |
| Client Device (No radar detection) | <input checked="" type="checkbox"/> |
| Client Device with Radar Detection | <input type="checkbox"/>            |

### 2.2 Device capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (FR1), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8), WPT

This device supports BT Beamforming.

Channel puncturing function is not supported for this device.

| Band 1 |                 | Band 2A |                 | Band 2C |                 | Band 3 |                 |
|--------|-----------------|---------|-----------------|---------|-----------------|--------|-----------------|
| Ch.    | Frequency (MHz) | Ch.     | Frequency (MHz) | Ch.     | Frequency (MHz) | Ch.    | Frequency (MHz) |
| 36     | 5180            | 52      | 5260            | 100     | 5500            | 149    | 5745            |
| :      | :               | :       | :               | :       | :               | :      | :               |
| 42     | 5210            | 56      | 5280            | 116     | 5580            | 157    | 5785            |
| :      | :               | :       | :               | :       | :               | :      | :               |
| 48     | 5240            | 64      | 5320            | 144     | 5720            | 165    | 5825            |

**Table 2-1. 802.11a / 802.11n / 802.11ac / 802.11ax (20MHz) Frequency / Channel Operations**

| Band 1 |                 | Band 2A |                 | Band 2C |                 | Band 3 |                 |
|--------|-----------------|---------|-----------------|---------|-----------------|--------|-----------------|
| Ch.    | Frequency (MHz) | Ch.     | Frequency (MHz) | Ch.     | Frequency (MHz) | Ch.    | Frequency (MHz) |
| 38     | 5190            | 54      | 5270            | 102     | 5510            | 151    | 5755            |
| :      | :               | :       | :               | :       | :               | :      | :               |
| 46     | 5230            | 62      | 5310            | 110     | 5550            | 159    | 5795            |
|        |                 |         |                 | :       | :               |        |                 |
|        |                 |         |                 | 142     | 5710            |        |                 |

**Table 2-2. 802.11n / 802.11ac / 802.11ax (40MHz BW) Frequency / Channel Operations**

| Band 1 |                 | Band 2A |                 | Band 2C |                 | Band 3 |                 |
|--------|-----------------|---------|-----------------|---------|-----------------|--------|-----------------|
| Ch.    | Frequency (MHz) | Ch.     | Frequency (MHz) | Ch.     | Frequency (MHz) | Ch.    | Frequency (MHz) |
| 42     | 5210            | 58      | 5290            | 106     | 5530            | 155    | 5775            |
|        |                 |         |                 | :       | :               |        |                 |
|        |                 |         |                 | 138     | 5690            |        |                 |

**Table 2-3. 802.11ac / 802.11ax (80MHz BW) Frequency / Channel Operations**

|                                         |                                                                                                                  |                            |                                 |
|-----------------------------------------|------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2461<br>IC: 579C-A2461      |  <b>DATA REFERENCE REPORT</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020006-15.BCG | Test Dates:<br>12/12/2020 - 03/19/2021                                                                           | EUT Type:<br>Tablet Device | Page 4 of 7                     |

## 2.3 Antenna Description

Following antenna gains provided by manufacturer were used for the testing.

| Frequency<br>[GHz] | Antenna Gain (dBi) |            |
|--------------------|--------------------|------------|
|                    | Antenna 5b         | Antenna 4b |
| 5.150 – 5.250      | 4.7                | 0.6        |
| 5.250 – 5.350      | 4.9                | -0.6       |
| 5.470 – 5.725      | 5.1                | -1.4       |
| 5.725 – 5.850      | 5.1                | 0.4        |

**Table 2-4. Highest Antenna Gain**

## 2.4 Master Parameters

| Parameters of Master:         |         |
|-------------------------------|---------|
| Minimum Antenna Gain          | 1.4 dBi |
| EIRP Level:                   | >23 dBm |
| Access Point Software Version | 7.7.9   |

**Table 2-5. Parameters of Master**

|                                                |                                                                                                                                                 |                                   |                                        |
|------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|----------------------------------------|
| FCC ID: BCGA2461<br>IC: 579C-A2461             |  <b>PCTEST</b><br><small>Proud to be part of element</small> | <b>DATA REFERENCE REPORT</b>      | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C2101020006-15.BCG | <b>Test Dates:</b><br>12/12/2020 - 03/19/2021                                                                                                   | <b>EUT Type:</b><br>Tablet Device | Page 5 of 7                            |

### 3.0 CONCLUSION


The spot-check data measured for variant model **FCC ID: BCGA2461 / IC: 579C-A2461** is in tolerance with reference model FCC ID: BCGA2379 / IC: 579C-A2379 per FCC/ISED Approved Data Referencing Test Plan.

|                                                  |                                                                                                                                                 |                                   |                                        |
|--------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|----------------------------------------|
| <b>FCC ID:</b> BCGA2461<br><b>IC:</b> 579C-A2461 |  <b>PCTEST</b><br><small>Proud to be part of element</small> | <b>DATA REFERENCE REPORT</b>      | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C2101020006-15.BCG   | <b>Test Dates:</b><br>12/12/2020 - 03/19/2021                                                                                                   | <b>EUT Type:</b><br>Tablet Device | Page 6 of 7                            |

## 4.0 APPENDIX A: REFERENCE MODEL TEST REPORT

Attached is the test report (1C2101020005-14.BCG) from reference model FCC ID: BCGA2379 / IC: 579C-A2379, which includes referenced data results.

|                                                  |                                                                                                                                                                                                                      |                                   |                                        |
|--------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|----------------------------------------|
| <b>FCC ID:</b> BCGA2461<br><b>IC:</b> 579C-A2461 |  <b>PCTEST</b><br>Proud to be part of  element | <b>DATA REFERENCE REPORT</b>      | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C2101020006-15.BCG   | <b>Test Dates:</b><br>12/12/2020 - 03/19/2021                                                                                                                                                                        | <b>EUT Type:</b><br>Tablet Device | Page 7 of 7                            |



## MEASUREMENT REPORT

### FCC PART 15.407 / ISSED RSS-247 DFS

**Applicant Name:**

Apple Inc.  
One Apple Park Way  
Cupertino, CA 95014  
United States

**Date of Testing:**

02/05/2021-02/15/2021

**Test Site/Location:**

PCTEST. Morgan Hill, CA, USA

**Test Report Serial No.:**

1C2101020005-14.BCG

**FCC ID:**

**BCGA2379**

**IC:**

**579C-A2379**

**APPLICANT:**

**Apple Inc.**

**Application Type:**

Certification

**Mode/HVIN:**

A2379

**EUT Type:**

Client Only Device, No Radar Detection Capability

**Max. RF Output Power:**

177.828 mW (22.50 dBm) Conducted

(802.11n UNII Band 2A)

178.238 mW (22.51 dBm) Conducted

(802.11n UNII Band 2C)

**Frequency Range:**

5250 – 5350 MHz (UNII-2A Band)

5470 – 5725 MHz (UNII-2C Band)

**FCC Classification:**

Unlicensed National Information Infrastructure (UNII)

**FCC Rule Part(s):**

Part 15 Subpart E (15.407)

**ISED Specification:**


RSS-247 Issue 2

**Test Procedure(s):**

KDB 905462 D02 v02

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 905462 D02 v02 Compliance Measurement Procedures for Unlicensed-National Information Infrastructure Devices Operating in the 5.25 – 5.35 GHz and 5.47 – 5.725 GHz Bands Incorporating Dynamic Frequency Selection. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez  
President



|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021                                                | EUT Type:<br>Tablet Device            | Page 1 of 54                    |



# TABLE OF CONTENTS

|       |                                                       |    |
|-------|-------------------------------------------------------|----|
| 1.0   | INTRODUCTION .....                                    | 3  |
| 1.1   | Scope .....                                           | 3  |
| 1.2   | PCTEST Test Location .....                            | 3  |
| 1.3   | Test Facility / Accreditations .....                  | 3  |
| 2.0   | PRODUCT INFORMATION.....                              | 4  |
| 2.1   | Equipment Description.....                            | 4  |
| 2.2   | Device Capabilities .....                             | 4  |
| 2.3   | Antenna Description .....                             | 5  |
| 2.4   | Test Support Equipment .....                          | 5  |
| 2.5   | Master Parameters .....                               | 5  |
| 2.6   | Software and Firmware.....                            | 5  |
| 2.7   | EMI Suppression Device(s)/Modifications .....         | 5  |
| 3.0   | DESCRIPTION OF TESTS .....                            | 6  |
| 3.1   | Evaluation Procedure .....                            | 6  |
| 3.2   | Environmental Conditions.....                         | 6  |
| 4.0   | ANTENNA REQUIREMENTS .....                            | 7  |
| 5.0   | MEASUREMENT UNCERTAINTY .....                         | 8  |
| 6.0   | TEST EQUIPMENT CALIBRATION DATA .....                 | 9  |
| 7.0   | DESCRIPTION OF DYNAMIC FREQUENCY SELECTION TEST ..... | 10 |
| 7.1   | Applicability.....                                    | 10 |
| 7.1.1 | Master Devices: .....                                 | 11 |
| 7.1.2 | Client Devices:.....                                  | 11 |
| 7.2   | DFS Detection Threshold Values.....                   | 12 |
| 7.3   | DFS Response Requirements .....                       | 13 |
| 7.4   | Parameters of DFS Test Signals .....                  | 14 |
| 7.5   | System Overview and Procedure .....                   | 16 |
| 7.6   | System Calibration:.....                              | 17 |
| 8.0   | EUT COMMUNICATION MODES .....                         | 20 |
| 9.0   | TEST RESULTS.....                                     | 24 |
| 9.1   | Summary .....                                         | 24 |
| 9.2   | Channel Loading.....                                  | 26 |
| 9.2.1 | Channel Loading Mode 1:.....                          | 26 |
| 9.2.2 | Channel Loading Mode 2:.....                          | 29 |
| 9.2.3 | Channel Loading Mode 3:.....                          | 32 |
| 9.2.4 | Channel Loading Mode 4:.....                          | 35 |
| 9.3   | Channel Move/ Closing Transmission Time .....         | 38 |
| 9.3.1 | Channel Move/ Closing Transmission Time Mode 1: ..... | 38 |
| 9.3.2 | Channel Move/ Closing Transmission Time Mode 2: ..... | 40 |
| 9.3.3 | Channel Move/ Closing Transmission Time Mode 3: ..... | 42 |
| 9.3.4 | Channel Move/ Closing Transmission Time Mode 4: ..... | 44 |
| 9.4   | Non-Occupancy Period.....                             | 46 |
| 9.4.1 | Non-Occupancy Period (30 Minutes) Mode 1: .....       | 46 |
| 9.4.2 | Non-Occupancy Period (30 Minutes) Mode 2: .....       | 48 |
| 9.4.3 | Non-Occupancy Period (30 Minutes) Mode 3: .....       | 50 |
| 9.4.4 | Non-Occupancy Period (30 Minutes) Mode 4: .....       | 52 |
| 10.0  | CONCLUSION.....                                       | 54 |

|                                         |                                                                                                                                                                                                              |                                       |                                 |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      |  <b>PCTEST</b><br>Proud to be part of  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021                                                                                                                                                                         | EUT Type:<br>Tablet Device            | Page 2 of 54                    |

## 1.0 INTRODUCTION

### 1.1 Scope

This report has been prepared to demonstrate compliance with the requirements for Dynamic Frequency Selection (DFS) as stated in KDB 905462 D02 v02. As of July 20, 2007, all devices operating in the 5250 – 5350 MHz and/or the 5470 – 5725 MHz bands (excluding 5600-5650MHz for ISED Canada) must comply with the DFS requirements.

### 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

### 1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Morgan Hill, CA 95037, U.S.A.

- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISED.

|                                         |                                                                                                                                                                                                              |                                       |                                 |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      |  <b>PCTEST</b><br>Proud to be part of  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021                                                                                                                                                                         | EUT Type:<br>Tablet Device            | Page 3 of 54                    |

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA2379, IC: 579C-A2379**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter. As the EUT does not have radar detection capability it was evaluated as a Client Only Device. All test results reported herein are applicable to the sample selected for testing.

**Mode of Operation:**

|                                    |                                     |
|------------------------------------|-------------------------------------|
| Master Device                      | <input type="checkbox"/>            |
| Client Device (No radar detection) | <input checked="" type="checkbox"/> |
| Client Device with Radar Detection | <input type="checkbox"/>            |

**Test Device Serial No.:** CWJHGH2M19

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (FR1/FR2), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8), WPT

This device supports BT Beamforming.

Channel puncturing function is not supported for this device.

| Band 1 |                 | Band 2A |                 | Band 2C |                 | Band 3 |                 |
|--------|-----------------|---------|-----------------|---------|-----------------|--------|-----------------|
| Ch.    | Frequency (MHz) | Ch.     | Frequency (MHz) | Ch.     | Frequency (MHz) | Ch.    | Frequency (MHz) |
| 36     | 5180            | 52      | 5260            | 100     | 5500            | 149    | 5745            |
| :      | :               | :       | :               | :       | :               | :      | :               |
| 42     | 5210            | 56      | 5280            | 116     | 5580            | 157    | 5785            |
| :      | :               | :       | :               | :       | :               | :      | :               |
| 48     | 5240            | 64      | 5320            | 144     | 5720            | 165    | 5825            |

**Table 2-1. 802.11a / 802.11n / 802.11ac / 802.11ax (20MHz) Frequency / Channel Operations**

| Band 1 |                 | Band 2A |                 | Band 2C |                 | Band 3 |                 |
|--------|-----------------|---------|-----------------|---------|-----------------|--------|-----------------|
| Ch.    | Frequency (MHz) | Ch.     | Frequency (MHz) | Ch.     | Frequency (MHz) | Ch.    | Frequency (MHz) |
| 38     | 5190            | 54      | 5270            | 102     | 5510            | 151    | 5755            |
| :      | :               | :       | :               | :       | :               | :      | :               |
| 46     | 5230            | 62      | 5310            | 110     | 5550            | 159    | 5795            |
|        |                 |         |                 | :       | :               |        |                 |
|        |                 |         |                 | 142     | 5710            |        |                 |

**Table 2-2. 802.11n / 802.11ac / 802.11ax (40MHz BW) Frequency / Channel Operations**

| Band 1 |                 | Band 2A |                 | Band 2C |                 | Band 3 |                 |
|--------|-----------------|---------|-----------------|---------|-----------------|--------|-----------------|
| Ch.    | Frequency (MHz) | Ch.     | Frequency (MHz) | Ch.     | Frequency (MHz) | Ch.    | Frequency (MHz) |
| 42     | 5210            | 58      | 5290            | 106     | 5530            | 155    | 5775            |
|        |                 |         |                 | :       | :               |        |                 |
|        |                 |         |                 | 138     | 5690            |        |                 |

**Table 2-3. 802.11ac / 802.11ax (80MHz BW) Frequency / Channel Operations**

|                                         |                                                                                                                                                                                                              |                                       |  |                                 |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|--|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      |  <b>PCTEST</b><br>Proud to be part of  | MEASUREMENT REPORT<br>(CERTIFICATION) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021                                                                                                                                                                         | EUT Type:<br>Tablet Device            |  | Page 4 of 54                    |

## 2.3 Antenna Description

Following antenna gains provided by manufacturer were used for the testing.

| Frequency [GHz] | Antenna Gain (dBi) |            |
|-----------------|--------------------|------------|
|                 | Antenna 5b         | Antenna 4b |
| 5.150 – 5.250   | 4.7                | 0.6        |
| 5.250 – 5.350   | 4.9                | -0.6       |
| 5.470 – 5.725   | 5.1                | -1.4       |
| 5.725 – 5.850   | 5.1                | 0.4        |

**Table 2-4. Highest Antenna Gain**

## 2.4 Test Support Equipment

The following equipment was used in support of the DFS testing.

| Device | Manufacturer | Model       | Description     | S/N:                      | FCC ID:      |
|--------|--------------|-------------|-----------------|---------------------------|--------------|
| Master | Apple        | A1521       | Access Point    | C86L3BA8FJ1R              | BCGA1521     |
|        |              | MacBook Air | Controller      | C02P41RZG086              | QDS-BRCM1072 |
| Client | Apple        | Apple TV    | Controller      | C0754033HHFP              | BCGA1625     |
|        |              | MacBook Air | Controller      | C02P41RZG086              | QDS-BRCM1072 |
|        |              | Chimp       | USB-C Cable     | 30480F                    | N/A          |
|        | Dell         | U24177HJ    | Monitor Display | 0RXP1N-74261-71Q-0APL-A01 | N/A          |

**Table 2-5. Test Support Equipment List**

## 2.5 Master Parameters

| Parameters of Master:         |         |
|-------------------------------|---------|
| Minimum Antenna Gain          | 1.4 dBi |
| EIRP Level:                   | >23 dBm |
| Access Point Software Version | 7.7.9   |

**Table 2-6. Parameters of Master**

## 2.6 Software and Firmware

The test was done with firmware version 18E20700y installed on the EUT.

## 2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

|                                         |                                                                                                                                                                                                              |                                       |                                 |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      |  <b>PCTEST</b><br>Proud to be part of  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021                                                                                                                                                                         | EUT Type:<br>Tablet Device            | Page 5 of 54                    |

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in KDB 905462 D02 v02 were used in the measurement of the EUT. Radiated test methodology was used for the DFS evaluation procedure of the EUT. No deviations to the test procedure and test methods occurred during the evaluation of the EUT.

Deviation from measurement procedure.....None

### 3.2 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

|                                                |                                                                                                                                                                                                                      |                                               |                                        |
|------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|----------------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379             |  <b>PCTEST</b><br>Proud to be part of  element | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C2101020005-14.BCG | <b>Test Dates:</b><br>02/05/2021-02/15/2021                                                                                                                                                                          | <b>EUT Type:</b><br>Tablet Device             | Page 6 of 54                           |

## 4.0 ANTENNA REQUIREMENTS

### Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

### Conclusion:

The EUT complies with the requirement of §15.203.

|                                                |                                                                                                                                                                                                              |                                               |                                        |
|------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|----------------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379             |  <b>PCTEST</b><br>Proud to be part of  | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C2101020005-14.BCG | <b>Test Dates:</b><br>02/05/2021-02/15/2021                                                                                                                                                                  | <b>EUT Type:</b><br>Tablet Device             | Page 7 of 54                           |

## 5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Parameter | Expanded Uncertainty |
|-----------|----------------------|
| Time      | $\pm 0.02\%$         |

|                                         |                                                                                                                                                 |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      |  <b>PCTEST</b><br><small>Proud to be part of element</small> | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021                                                                                                            | EUT Type:<br>Tablet Device            | Page 8 of 54                    |

## 6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

| Manufacturer    | Model   | Description                     | Cal. Date  | Cal. Interval | Cal. Due Date | Serial No. |
|-----------------|---------|---------------------------------|------------|---------------|---------------|------------|
| Aeroflex        | 3025C   | PXI RF Synthesizer              | 02/05/2021 | Biennial      | 02/05/2023    | 302570726  |
| Aeroflex        | 3035C   | PXI RF Digitizer                | 02/05/2021 | Biennial      | 02/05/2023    | 303570427  |
| ETS-Lindgren    | 3117    | Double Ridged Guide Antenna     | 04/21/2020 | Annual        | 04/21/2021    | 205956     |
| Rohde & Schwarz | ESW44   | EMI Test Receiver               | 8/7/2020   | Annual        | 8/7/2021      | 101668     |
| Rohde & Schwarz | TC-TA18 | Cross Polarized Vivaldi Antenna | 10/2/2020  | Annual        | 10/2/2021     | 101063     |

**Table 6-1. Test Equipment List**

**Note:**

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

|                                                |                                                                                                                                                                                                              |                                               |                                        |
|------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|----------------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379             |  <b>PCTEST</b><br>Proud to be part of  | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C2101020005-14.BCG | <b>Test Dates:</b><br>02/05/2021-02/15/2021                                                                                                                                                                  | <b>EUT Type:</b><br>Tablet Device             | Page 9 of 54                           |



## 7.0 DESCRIPTION OF DYNAMIC FREQUENCY SELECTION TEST

### 7.1 Applicability

The following table from KDB 905462 D02 v02 lists the applicable requirements for the DFS testing. The device evaluated in this report is considered a client device without radar detection capability.

| Requirement                     | Operational Mode |                                |                             |
|---------------------------------|------------------|--------------------------------|-----------------------------|
|                                 | Master           | Client Without Radar Detection | Client with Radar Detection |
| Non-Occupancy Period            | Yes              | Not required                   | Yes                         |
| DFS Detection Threshold         | Yes              | Not required                   | Yes                         |
| Channel Availability Check Time | Yes              | Not required                   | Not required                |
| U-NII Detection Bandwidth       | Yes              | Not required                   | Yes                         |

**Table 7-1. DFS Applicability**

| Requirement                       | Operational Mode |                                |                             |
|-----------------------------------|------------------|--------------------------------|-----------------------------|
|                                   | Master           | Client Without Radar Detection | Client with Radar Detection |
| DFS Detection Threshold           | Yes              | Not required                   | Yes                         |
| Channel Closing Transmission Time | Yes              | Yes                            | Yes                         |
| Channel Move Time                 | Yes              | Yes                            | Yes                         |
| U-NII Detection Bandwidth         | Yes              | Not required                   | Yes                         |

**Table 7-2. DFS Applicability During Normal Operation**

| Additional requirements for devices with multiple bandwidth modes                                                                                                                                                                                                                                                                                            | Master Device or Client with Radar Detection | Client without Radar Detection                       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|------------------------------------------------------|
| U-NII Detection Bandwidth and Statistical Performance Check                                                                                                                                                                                                                                                                                                  | All BW modes must be tested                  | Not required                                         |
| Channel Move Time and Channel Closing Transmission Time                                                                                                                                                                                                                                                                                                      | Test using widest BW mode available          | Test using the widest BW mode available for the link |
| All other tests                                                                                                                                                                                                                                                                                                                                              | Any single BW mode                           | Not required                                         |
| <b>Note:</b> Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency. |                                              |                                                      |

**Table 7-3. Additional Requirement for Devices with Multiple Bandwidth Modes**

|                                         |                                                                                                                                                                                                              |                                       |                                 |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      |  <b>PCTEST</b><br>Proud to be part of  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021                                                                                                                                                                         | EUT Type:<br>Tablet Device            | Page 10 of 54                   |

Per KDB 905462 D02 v02 the operational behavior and individual DFS requirements associated with these modes are as follows:

### 7.1.1 Master Devices:

- a) The Master Device will use DFS in order to detect Radar Waveforms with received signal strength above the DFS Detection Threshold in the 5250 – 5350 MHz and 5470 – 5725 MHz bands. DFS is not required in the 5150 – 5250 MHz or 5725 – 5850 MHz bands.
- b) Before initiating a network on a Channel, the Master Device will perform a Channel Availability Check for a specified time duration (Channel Availability Check Time) to ensure that there is no radar system operating on the Channel, using DFS described under subsection a) above.
- c) The Master Device initiates a U-NII network by transmitting control signals that will enable other U-NII devices to Associate with the Master Device.
- d) During normal operation, the Master Device will monitor the Channel (In-Service Monitoring) to ensure that there is no radar system operating on the Channel, using DFS described under a).
- e) If the Master Device has detected a Radar Waveform during In-Service Monitoring as described under d), the Operating Channel of the U-NII network is no longer an Available Channel. The Master Device will instruct all associated Client Device(s) to stop transmitting on this Channel within the Channel Move Time. The transmissions during the Channel Move Time will be limited to the Channel Closing Transmission Time.
- f) Once the Master Device has detected a Radar Waveform it will not utilize the Channel for the duration of the Non-Occupancy Period.
- g) If the Master Device delegates the In-Service Monitoring to a Client Device, then the combination will be tested to the requirements described under d) through f) above.

### 7.1.2 Client Devices:

- a) A Client Device will not transmit before having received appropriate control signals from a Master Device.
- b) A Client Device will stop all its transmissions whenever instructed by a Master Device to which it is associated and will meet the Channel Move Time and Channel Closing Transmission Time requirements. The Client Device will not resume any transmissions until it has again received control signals from a Master Device.
- c) If a Client Device is performing In-Service Monitoring and detects a Radar Waveform above the DFS Detection Threshold, it will inform the Master Device. This is equivalent to the Master Device detecting the Radar Waveform and d) through f) of section 5.1.1 apply.
- d) Irrespective of Client Device or Master Device detection the Channel Move Time and Channel Closing Transmission Time requirements remain the same.
- e) The client test frequency must be monitored to ensure no transmission of any type has occurred for 30 minutes. Note: If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shutdown (rather than moving channels), no beacons should appear.

|                                         |                                                                                                                            |                                       |                                 |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      |  PCTEST®<br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021                                                                                       | EUT Type:<br>Tablet Device            | Page 11 of 54                   |

## 7.2 DFS Detection Threshold Values

The DFS detection thresholds are defined for Master devices and Client Devices with In-service monitoring. These detection thresholds are listed in the following table.

| Maximum Transmit Power                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Value<br>(See Notes 1, 2, and 3) |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|
| EIRP $\geq$ 200 milliwatt                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | -64 dBm                          |
| EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | -62 dBm                          |
| EIRP < 200 milliwatt that do not meet the power spectral density requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | -64 dBm                          |
| <p><b>Note 1:</b> This is the level at the input of the receiver assuming a 0 dBi receive antenna.</p> <p><b>Note 2:</b> Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.</p> <p><b>Note 3:</b> EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.</p> |                                  |

**Table 7-4: Detection Thresholds for Master Devices and Client Devices with Radar Detection**

|                                         |                                                                                                                                                 |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      |  <b>PCTEST</b><br><small>Proud to be part of element</small> | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021                                                                                                            | EUT Type:<br>Tablet Device            | Page 12 of 54                   |

### 7.3 DFS Response Requirements

DFS response requirements for Master and Client Devices are listed in the following table.

| Parameter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Value                                                                                                    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|
| Non-occupancy period                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Minimum 30 minutes                                                                                       |
| Channel Availability Check Time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 60 seconds                                                                                               |
| Channel Move Time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 10 seconds<br>See Note1                                                                                  |
| Channel Closing Transmission Time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period.<br>See Note 1 and 2. |
| U-NII Detection Bandwidth                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Minimum 100% of the U- NII 99% transmission power bandwidth.<br>See Note 3.                              |
| <p><b>Note 1:</b> Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst</p> <p><b>Note 2:</b> The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.</p> <p>frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.</p> |                                                                                                          |

**Table 7-5: DFS Response Requirements**

|                                         |                                                                                                                                                 |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      |  <b>PCTEST</b><br><small>Proud to be part of element</small> | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021                                                                                                            | EUT Type:<br>Tablet Device            | Page 13 of 54                   |

## 7.4 Parameters of DFS Test Signals

As the EUT is a Client Device with no Radar Detection only one type radar pulse is required for the testing. Radar Pulse type 0 was used in the evaluation of the Client device for the purpose of measuring the Channel Move Time and the Channel Closing Transmission Time. Table 7-6 lists the parameters for the Short Pulse Radar Waveforms. A plot of the Radar Pulse Type 0 used for testing is included in Section 7.7 of this report.

| Radar Type                                                                                                                           | Pulse Width (μsec) | PRI (μsec)                                                                                                                                                    | Number of Pulses                                                                    | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|--------------------------------------------------------------------------------------------------------------------------------------|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------|--------------------------|
| 0                                                                                                                                    | 1                  | 1428                                                                                                                                                          | 18                                                                                  | See Note 1                                 | See Note 1               |
| 1                                                                                                                                    | 1                  | Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a                                                                     | $\text{Roundup} \left\{ \frac{1}{360} \cdot \frac{19.10^6}{PRI_{\mu sec}} \right\}$ | 60%                                        | 30                       |
|                                                                                                                                      |                    | Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A |                                                                                     |                                            |                          |
| 2                                                                                                                                    | 1-5                | 150-230                                                                                                                                                       | 23-29                                                                               | 60%                                        | 30                       |
| 3                                                                                                                                    | 6-10               | 200-500                                                                                                                                                       | 16-18                                                                               | 60%                                        | 30                       |
| 4                                                                                                                                    | 11-20              | 200-500                                                                                                                                                       | 12-16                                                                               | 60%                                        | 30                       |
| Aggregate (Radar Types 1-4)                                                                                                          |                    |                                                                                                                                                               |                                                                                     | 80%                                        | 120                      |
| Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests. |                    |                                                                                                                                                               |                                                                                     |                                            |                          |

**Table 7-6: Parameters for Short Pulse Radar Waveforms**

| Radar Type | Pulse Width (μsec) | Chirp Width (MHz) | PRI (μsec)  | Number of Pulses per Burst | Number of Bursts | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|------------|--------------------|-------------------|-------------|----------------------------|------------------|--------------------------------------------|--------------------------|
| 5          | 50 - 100           | 5 - 20            | 1000 – 2000 | 1 - 3                      | 8 - 20           | 80%                                        | 30                       |

**Table 7-7. Parameters for Long Pulse Radar Waveforms**

|                                         |                                                                                                                                                                                                                      |                                       |                                 |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      |  <b>PCTEST</b><br>Proud to be part of  element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021                                                                                                                                                                                 | EUT Type:<br>Tablet Device            | Page 14 of 54                   |

| Radar Type | Pulse Width (μsec) | PRI (μsec) | Pulses per Hop | Hopping Rate (kHz) | Hopping Sequence Length (msec) | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|------------|--------------------|------------|----------------|--------------------|--------------------------------|--------------------------------------------|--------------------------|
| 6          | 1                  | 333        | 9              | 0.333              | 300                            | 70%                                        | 30                       |

**Table 7-8. Parameters for Frequency Hopping Radar Waveforms**


|                                                |                                                                                                                                                 |                                               |                                        |
|------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|----------------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379             |  <b>PCTEST</b><br><small>Proud to be part of element</small> | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C2101020005-14.BCG | <b>Test Dates:</b><br>02/05/2021-02/15/2021                                                                                                     | <b>EUT Type:</b><br>Tablet Device             | Page 15 of 54                          |

## 7.5 System Overview and Procedure

### DFS Test Setup per KDB 905462 D02 V02:

|                                 |                                     |
|---------------------------------|-------------------------------------|
| <b>Radiated DFS Test Setup</b>  | <input checked="" type="checkbox"/> |
| <b>Conducted DFS Test Setup</b> | <input type="checkbox"/>            |

KDB 905462 D02 v02 describes radiated test setup and conducted test setup. DFS testing was performed using radiated test setup, as seen in Figure 7-1 below. One channel was selected in Band UNII-2C, between 5470-5725 MHz, for testing.

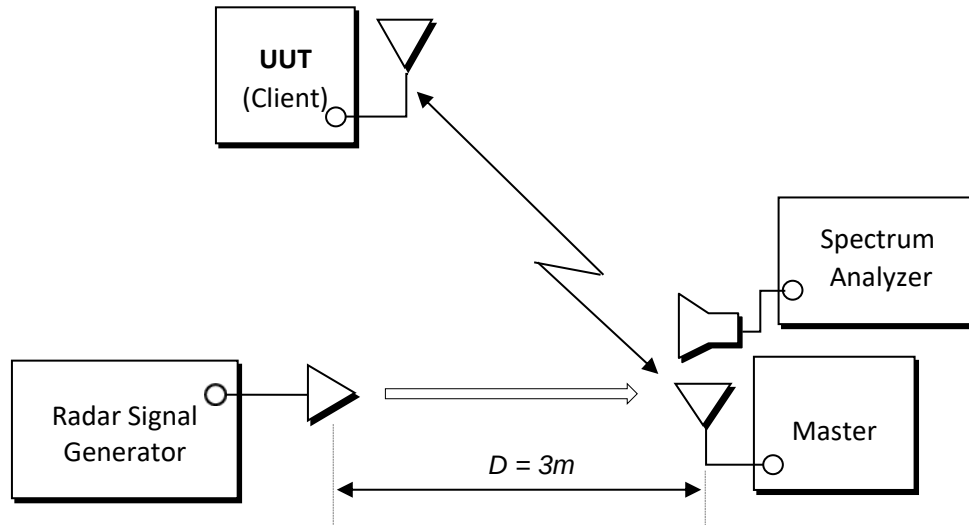

**Figure 7-1. Radiated Test Setup for DFS**

1. The “Aeroflex PXI DFS Radar Simulator and Analyzer Test Suite” is setup to provide a simulated radar pulse at the frequency that the Master and Client are operating. A Type 0 radar pulse was used.
2. The Client Device (EUT) is set up per the diagram in Figure 7-1 and communications between the Master device and the Client is established.
3. The FCC video test file is streamed from the Master to the Client to properly load the network.
4. The “Aeroflex PXI DFS Radar Simulator and Analyzer Test Suite” is set to record and display 12 seconds of time, starting from where the simulated radar is generated. This time domain plot captures any transmissions occurring up to and after 10 seconds. Aggregate time is computed to ensure compliance. (Note: the channel may be different since the Master and Client have changed channels due to the detection of the initial radar pulse.)
5. After the initial radar burst the channel is monitored for 30 minutes to ensure no transmissions or beacons occur. A second monitoring setup is used to verify that the Master and Client have both moved to different channels.

|                                                  |                                              |                                               |                                        |
|--------------------------------------------------|----------------------------------------------|-----------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BCGA2379<br><b>IC:</b> 579C-A2379 | <b>PCTEST</b><br>Proud to be part of element | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C2101020005-14.BCG   | <b>Test Dates:</b><br>02/05/2021-02/15/2021  | <b>EUT Type:</b><br>Tablet Device             | Page 16 of 54                          |

## 7.6 System Calibration:

The following equipment setup was used to calibrate the Radar Waveform. A spectrum analyzer was used to establish the test signal level for each radar type. During this process, there were no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) mode at the frequency of the Radar Waveform generator. Peak detection was utilized. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3MHz.

The signal generator amplitude is adjusted so that the power level measured at the spectrum analyzer is equal to the DFS detection threshold -64 dBm. The required radiated threshold at the antenna port is  $-64\text{dBm} + 0\text{dBi} + 1\text{dB} = -63\text{ dBm}$  (Section 7.2).

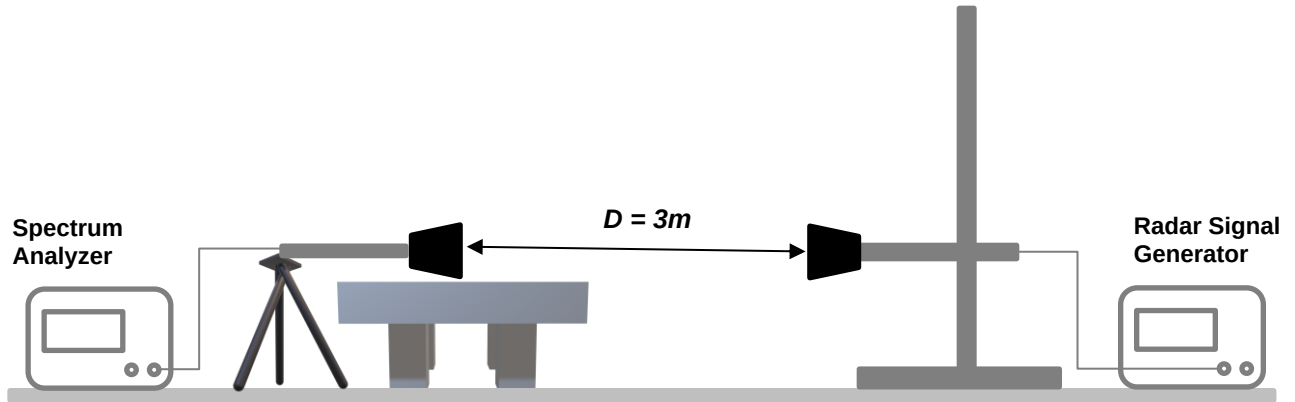


Figure 7-2. Radar Waveform Calibration

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021                                                | EUT Type:<br>Tablet Device            | Page 17 of 54                   |



### Radar Waveform Calibration Plot:

The radiated plots of the Radar Pulse Signals (Type 0) are given below after performing the system calibration as described in Section 7.7.

#### Short Pulse Radar Type 0:

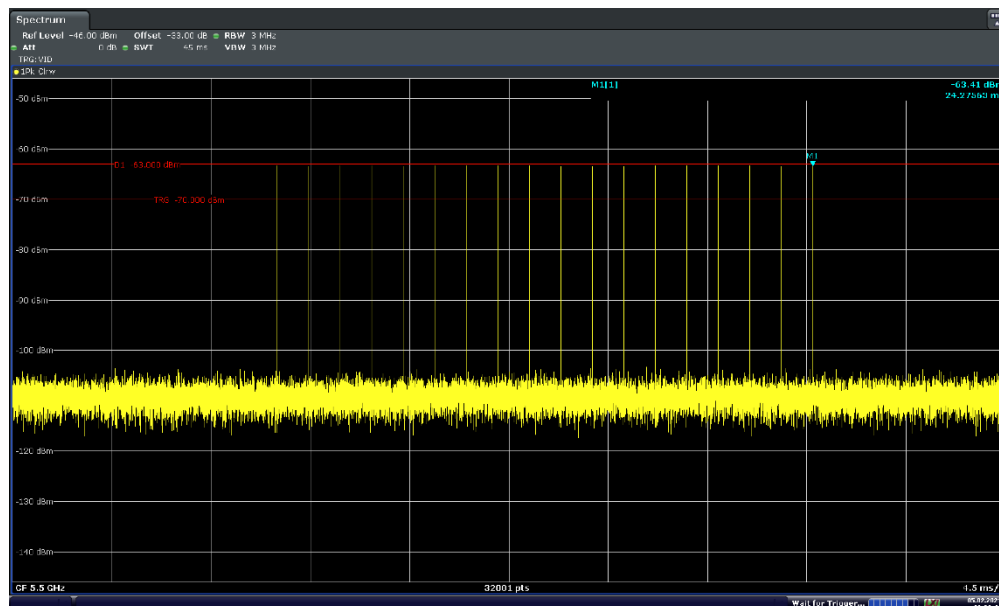


Figure 7-3. 5500MHz – Radar Pulse Type 0 (20MHz)

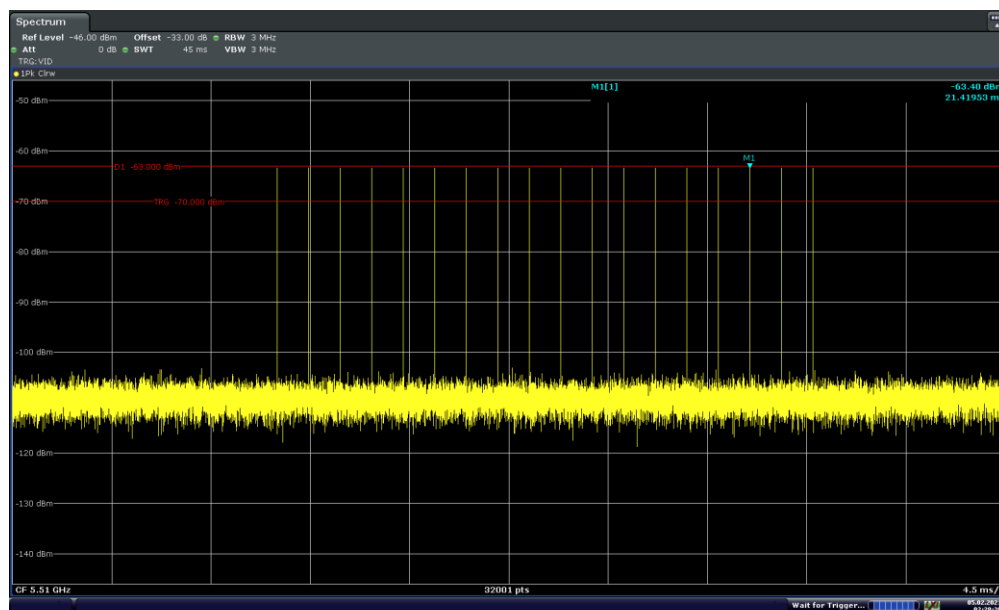


Figure 7-4. 5510MHz – Radar Pulse Type 0 (40MHz)

|                                         |                                              |                                       |                                 |
|-----------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021         | EUT Type:<br>Tablet Device            | Page 18 of 54                   |

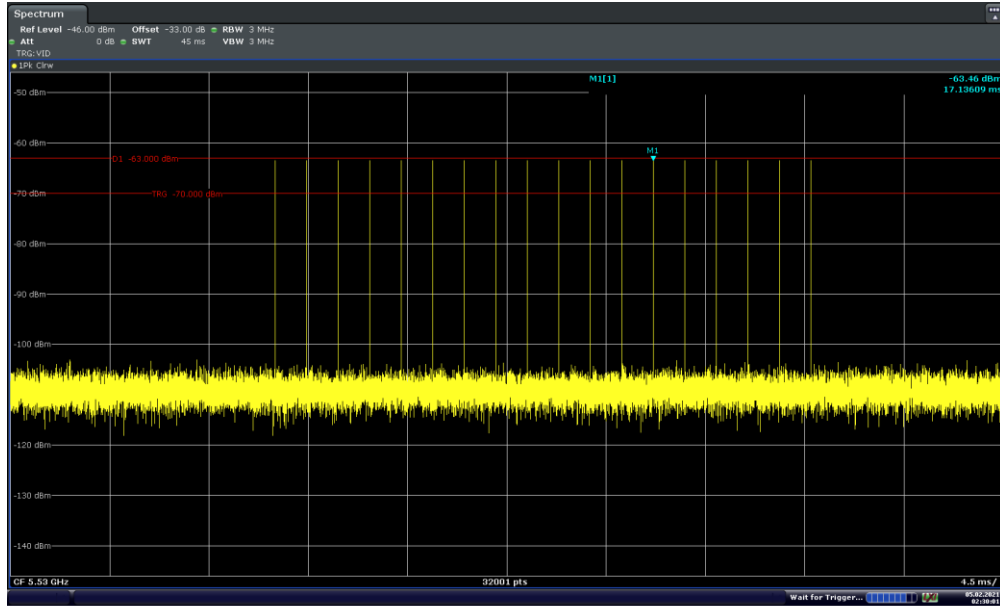


Figure 7-5. 5530MHz – Radar Pulse Type 0 (80MHz)

|                                         |                                              |                                       |                                 |
|-----------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021         | EUT Type:<br>Tablet Device            | Page 19 of 54                   |

## 8.0 EUT COMMUNICATION MODES

The EUT was tested in 4 different test configurations,

Mode 1: Client Mode


Mode 2: Client to Client

Mode 3: Peer to Peer (EUT)

Mode 4: Peer to Peer (Apple TV)

### **Mode 1: Client Mode**

Client is connected to Master (AP) via WLAN network and plays a video test file “6 ½ Magic Hours” in a Server (Laptop). This Server is connected to the Master (AP) via ethernet cable. The Vivaldi antenna is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.

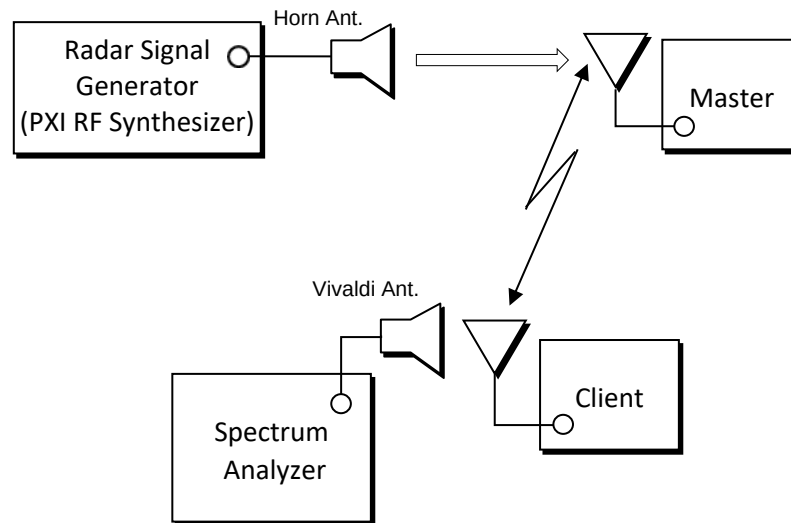

**Figure 8-1. Test Setup (Mode 1)**

|                                         |                                                                                                                                                                                                                      |                                       |                                 |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      |  <b>PCTEST</b><br>Proud to be part of  element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021                                                                                                                                                                                 | EUT Type:<br>Tablet Device            | Page 20 of 54                   |

## Mode 2: Client-to-Client Communications Mode

Client plays the video test file that is streamed to generate WLAN while linked to Master and streamed the video through Apple TV to Monitor display. The Vivaldi antenna is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.

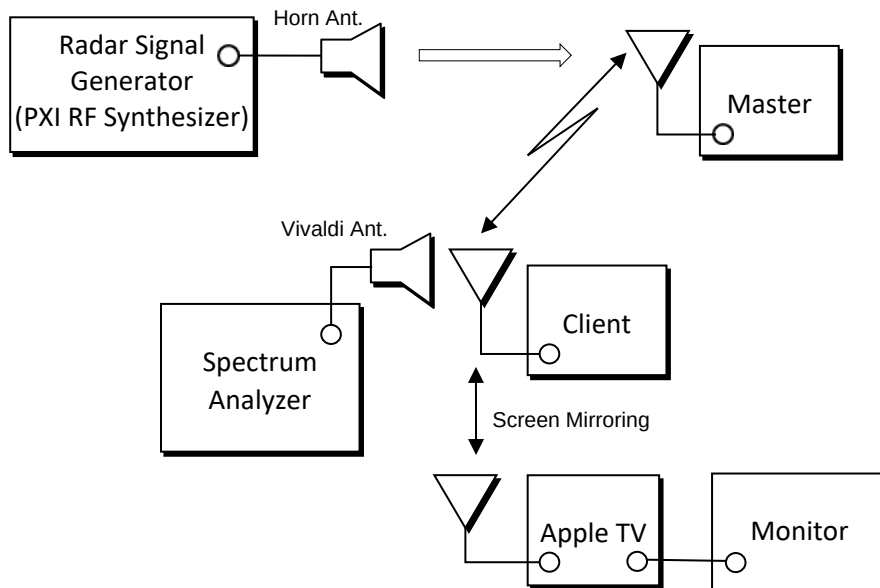


Figure 8-2. Test Setup (Mode 2)


|                                         |                                              |                                       |                                 |
|-----------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021         | EUT Type:<br>Tablet Device            | Page 21 of 54                   |

### Mode 3: Peer-to-Peer (EUT) Communications Mode

Generate and inject additional transmission:

1. Client and Apple TV must be linked to the Master.
2. Client plays video that is saved within its internal storage and begin mirroring screen via Apple TV.
3. Connect the Apple TV and Client to the support laptop and initiate additional transmission using iPerf.
4. After the additional transmission is injected, the Client must be disconnected to the Master.
5. Client stops and re-start mirroring screen.

Client plays video that is saved within its internal storage and streamed through Apple TV to the Monitor display. The receive antenna/ monitoring antenna is placed near the EUT. Additional data traffic was sent from the EUT (Client) to Apple TV (Server) using iPerf. The Vivaldi antenna is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.

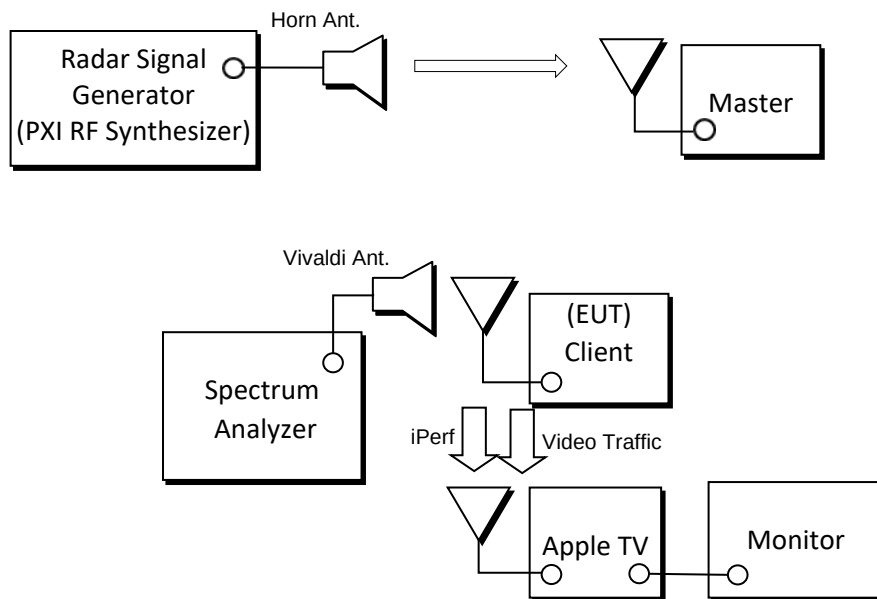

**Figure 8-3. Test Setup (Mode 3)**


|                                         |                                              |                                       |                                 |
|-----------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021         | EUT Type:<br>Tablet Device            | Page 22 of 54                   |

#### Mode 4: Peer-to-Peer (Apple TV) Communications Mode

Generate and inject additional transmission:

1. Client and Apple TV must be linked to the Master.
2. Client plays video that is saved within its internal storage and begin mirroring screen via Apple TV.
3. Connect the Apple TV and Client to the support laptop and initiate additional transmission using iPerf.
4. After the additional transmission is injected, the Client must be disconnected to the Master.
5. Client stops and re-start mirroring screen.

Client plays video that is saved within its internal storage and streamed through Apple TV to the Monitor display. The receive antenna/ monitoring antenna is placed near the Apple TV. Additional data traffic was sent from the Apple TV (Client) to the EUT (Server) using iPerf. The Vivaldi antenna is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.

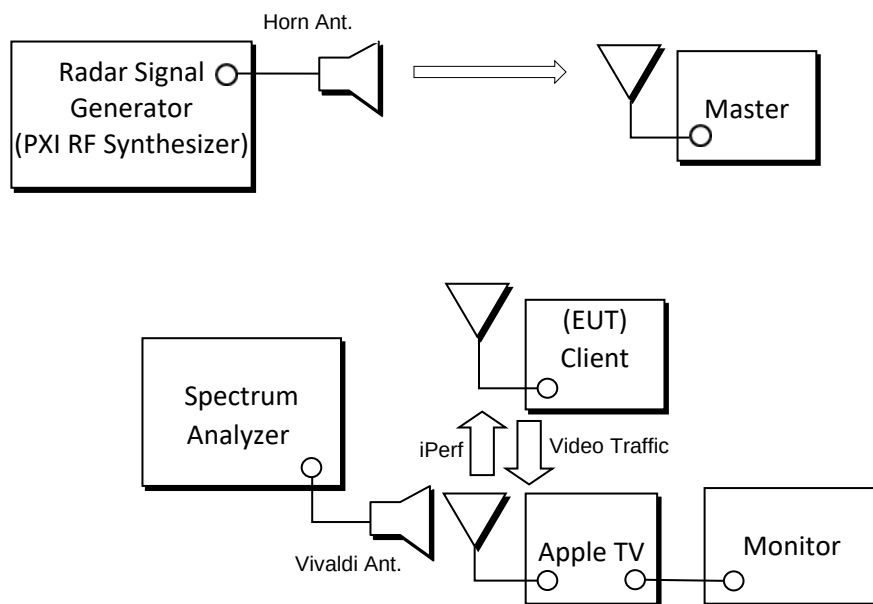

**Figure 8-4. Test Setup (Mode 4)**

In summary, for Modes 1 and Mode 2, Client is linked to the Master, and for Modes 3 and Mode 4, Client is not linked to the Master.

|                                         |                                              |                                       |                                 |
|-----------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021         | EUT Type:<br>Tablet Device            | Page 23 of 54                   |

## 9.0 TEST RESULTS

### 9.1 Summary

Company Name: Apple Inc.  
FCC ID: BCGA2379  
IC: 579C-A2379  
FCC Classification: Unlicensed National Information Infrastructure (UNII)

|                                                                               | Mode                         | Parameter                         | Measured                                             |                                                      |                                                      | Limit                                                      | Result |
|-------------------------------------------------------------------------------|------------------------------|-----------------------------------|------------------------------------------------------|------------------------------------------------------|------------------------------------------------------|------------------------------------------------------------|--------|
|                                                                               |                              |                                   | 20MHz Bandwidth                                      | 40MHz Bandwidth                                      | 80MHz Bandwidth                                      |                                                            |        |
| 5470 – 5725 MHz<br>(excluding 5600-5650MHz for ISED Canada)<br>UNII – 2C Band | 1<br>Client Mode             | Channel Move Time                 | 4.161 s                                              | 4.129 s                                              | 0.084 s                                              | 10 seconds                                                 | Pass   |
|                                                                               |                              | Channel Closing Transmission Time | < 200ms + 19.185 ms (aggregate)                      | < 200ms + 19.308 ms (aggregate)                      | < 200ms + 0.000 ms (aggregate)                       | 200 ms + aggregate of 60ms over remaining 10 second period | Pass   |
|                                                                               |                              | Non-Occupancy Period              | Monitored for 30 minutes with no client transmission | Monitored for 30 minutes with no client transmission | Monitored for 30 minutes with no client transmission | 30 Minutes                                                 | Pass   |
|                                                                               | 2<br>Client to Client        | Channel Move Time                 | 4.133 s                                              | 4.134 s                                              | 0.026 s                                              | 10 seconds                                                 | Pass   |
|                                                                               |                              | Channel Closing Transmission Time | < 200ms + 19.646 ms (aggregate)                      | < 200ms + 19.698 ms (aggregate)                      | < 200ms + 0.000 ms (aggregate)                       | 200 ms + aggregate of 60ms over remaining 10 second period | Pass   |
|                                                                               |                              | Non-Occupancy Period              | Monitored for 30 minutes with no client transmission | Monitored for 30 minutes with no client transmission | Monitored for 30 minutes with no client transmission | 30 Minutes                                                 | Pass   |
|                                                                               | 3<br>Peer to Peer (EUT)      | Channel Move Time                 | 4.059 s                                              | 4.143 s                                              | 0.061 s                                              | 10 seconds                                                 | Pass   |
|                                                                               |                              | Channel Closing Transmission Time | < 200ms + 18.694 ms (aggregate)                      | < 200ms + 18.917 ms (aggregate)                      | < 200ms + 0.000 ms (aggregate)                       | 200 ms + aggregate of 60ms over remaining 10 second period | Pass   |
|                                                                               |                              | Non-Occupancy Period              | Monitored for 30 minutes with no client transmission | Monitored for 30 minutes with no client transmission | Monitored for 30 minutes with no client transmission | 30 Minutes                                                 | Pass   |
|                                                                               | 4<br>Peer to Peer (Apple TV) | Channel Move Time                 | 4.179 s                                              | 4.204 s                                              | 0.132 s                                              | 10 seconds                                                 | Pass   |
|                                                                               |                              | Channel Closing Transmission Time | < 200ms + 19.183 ms (aggregate)                      | < 200ms + 18.574 ms (aggregate)                      | < 200ms + 0.000 ms (aggregate)                       | 200 ms + aggregate of 60ms over remaining 10 second period | Pass   |
|                                                                               |                              | Non-Occupancy Period              | Monitored for 30 minutes with no client transmission | Monitored for 30 minutes with no client transmission | Monitored for 30 minutes with no client transmission | 30 Minutes                                                 | Pass   |

Table 9-1. Summary of Test Results

|                                         |                                                                                                                                                                                                              |                                       |                                 |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      |  <b>PCTEST</b><br>Proud to be part of  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021                                                                                                                                                                         | EUT Type:<br>Tablet Device            | Page 24 of 54                   |

**Notes:**

- 1) The EUT was found to be compliant with the requirements for DFS as required for a Client Device per Part 15.407(h), RSS-247 and KDB 905462 D02 v02.
- 2) Automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The list is given below,
  - DFS threshold count v1.1
  - DFS Radar Simulator and Analyzer v2.8 (Aeroflex Inc.)
  - iPerf Software

|                                                  |                                                                                                                                                 |                                               |  |                                        |
|--------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|--|----------------------------------------|
| <b>FCC ID:</b> BCGA2379<br><b>IC:</b> 579C-A2379 |  <b>PCTEST</b><br><small>Proud to be part of element</small> | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |  | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C2101020005-14.BCG   | <b>Test Dates:</b><br>02/05/2021-02/15/2021                                                                                                     | <b>EUT Type:</b><br>Tablet Device             |  | Page 25 of 54                          |



## 9.2 Channel Loading

### 9.2.1 Channel Loading Mode 1:

#### Channel Loading Notes:

Per KDB 905462 D02 v02, timing plots are required with calculations demonstrating a minimum channel loading of approximately 17% or greater. Channel loading can be estimated by setting the spectrum analyzer for zero span and approximate the transmission time.

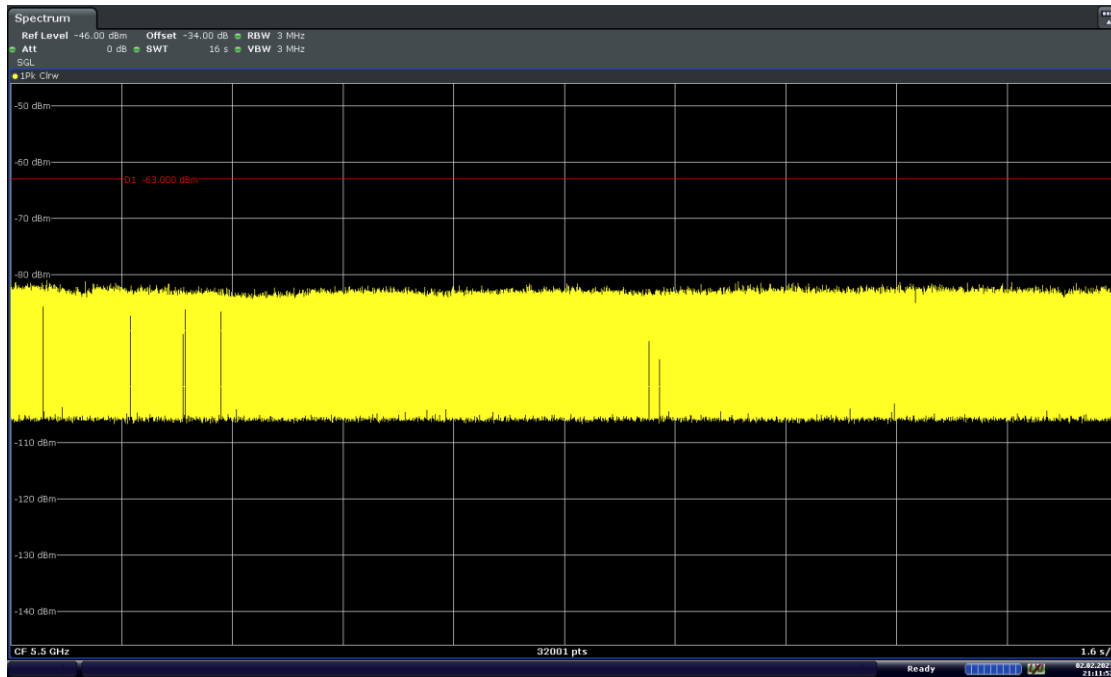


Figure 9-1. 5500MHz - Channel Loading - Mode 1 (20MHz)

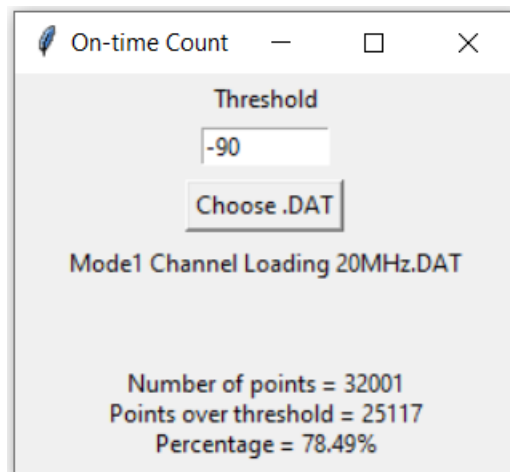


Figure 9-2. 5500MHz - Channel Loading Calculation - Mode 1 (20MHz)

|                                         |                                              |                                       |                                 |
|-----------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021         | EUT Type:<br>Tablet Device            | Page 26 of 54                   |

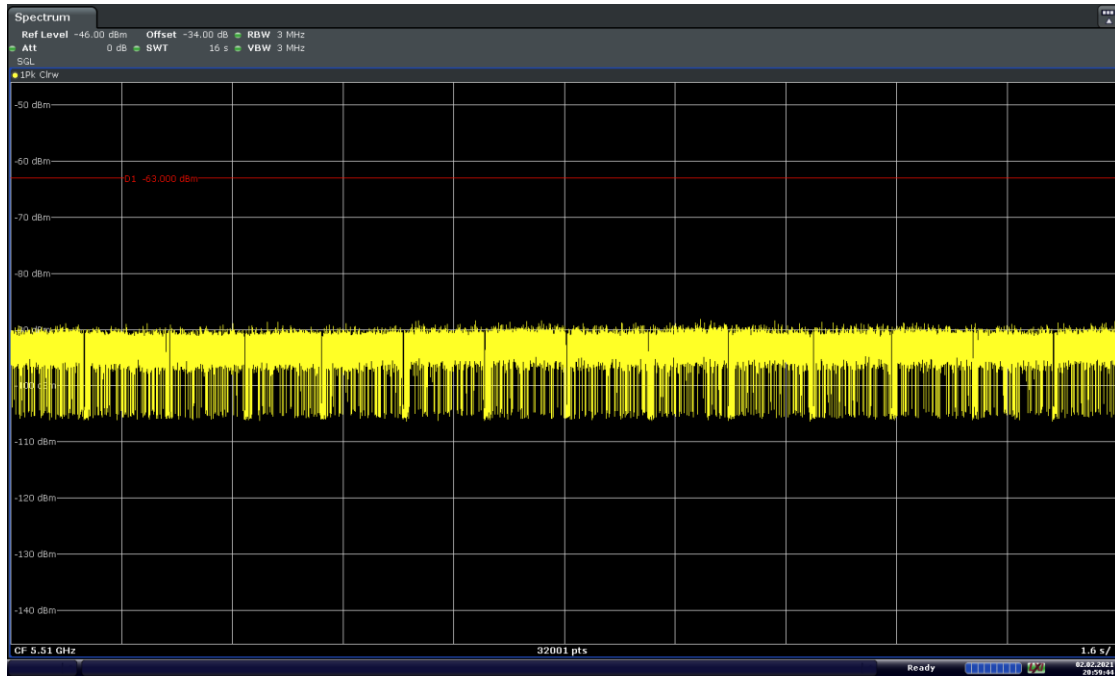


Figure 9-3. 5510MHz - Channel Loading - Mode 1 (40MHz)

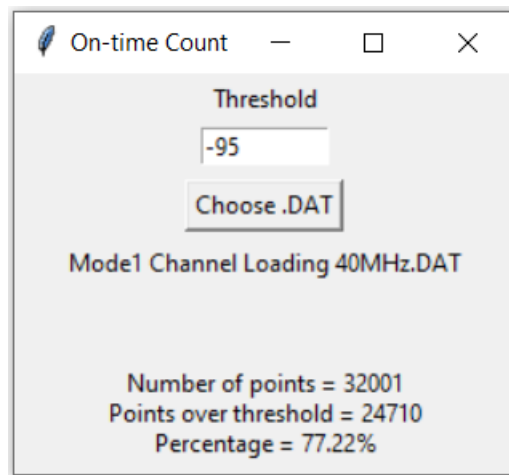


Figure 9-4 5510MHz - Channel Loading Calculation - Mode 1 (40MHz)

|                                         |                                              |                                       |                                 |
|-----------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021         | EUT Type:<br>Tablet Device            | Page 27 of 54                   |

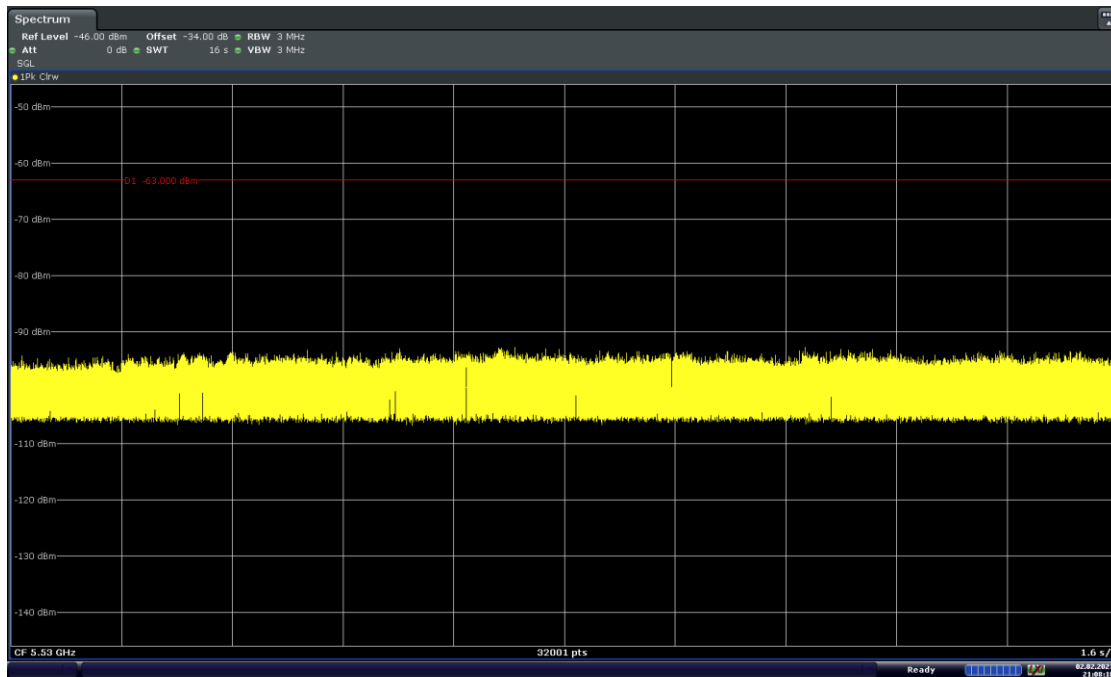


Figure 9-5. 5530MHz - Channel Loading - Mode 1 (80MHz)

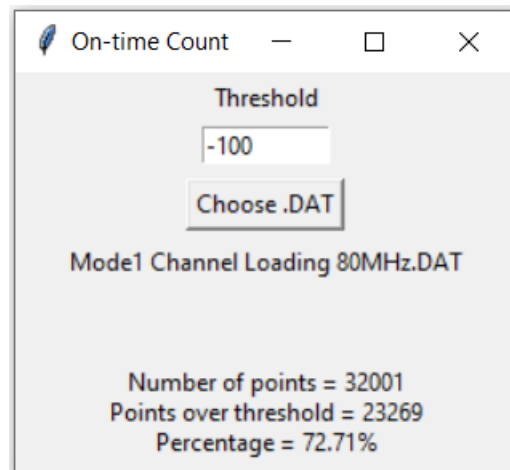


Figure 9-6. 5530MHz - Channel Loading Calculation - Mode 1 (80MHz)

|                                         |                                                                                                                                                                                                              |                                       |                                 |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      |  <b>PCTEST</b><br>Proud to be part of  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021                                                                                                                                                                         | EUT Type:<br>Tablet Device            | Page 28 of 54                   |

## 9.2.2 Channel Loading Mode 2:

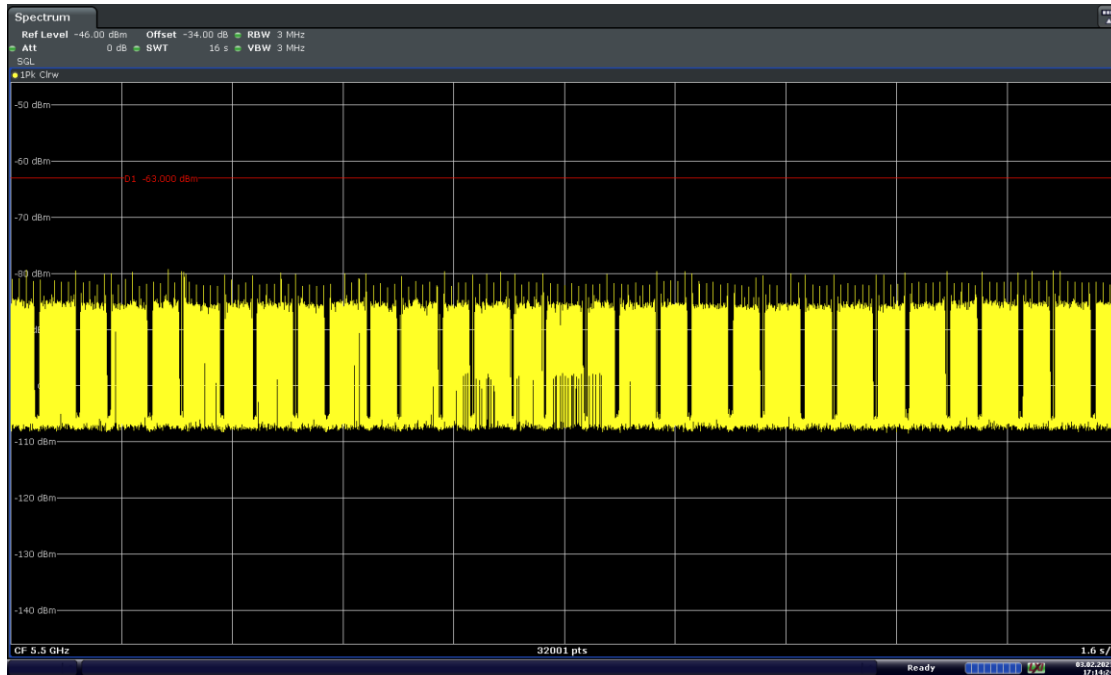


Figure 9-7. 5500MHz - Channel Loading - Mode 2 (20MHz)

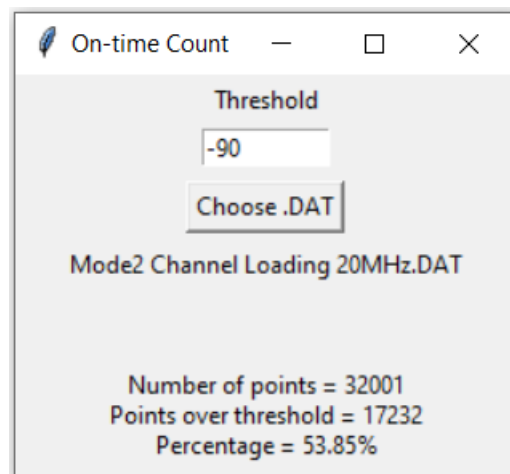


Figure 9-8. 5500MHz - Channel Loading Calculation - Mode 2 (20MHz)

|                                         |                                                                                                                                                                                                              |                                       |                                 |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      |  <b>PCTEST</b><br>Proud to be part of  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021                                                                                                                                                                         | EUT Type:<br>Tablet Device            | Page 29 of 54                   |

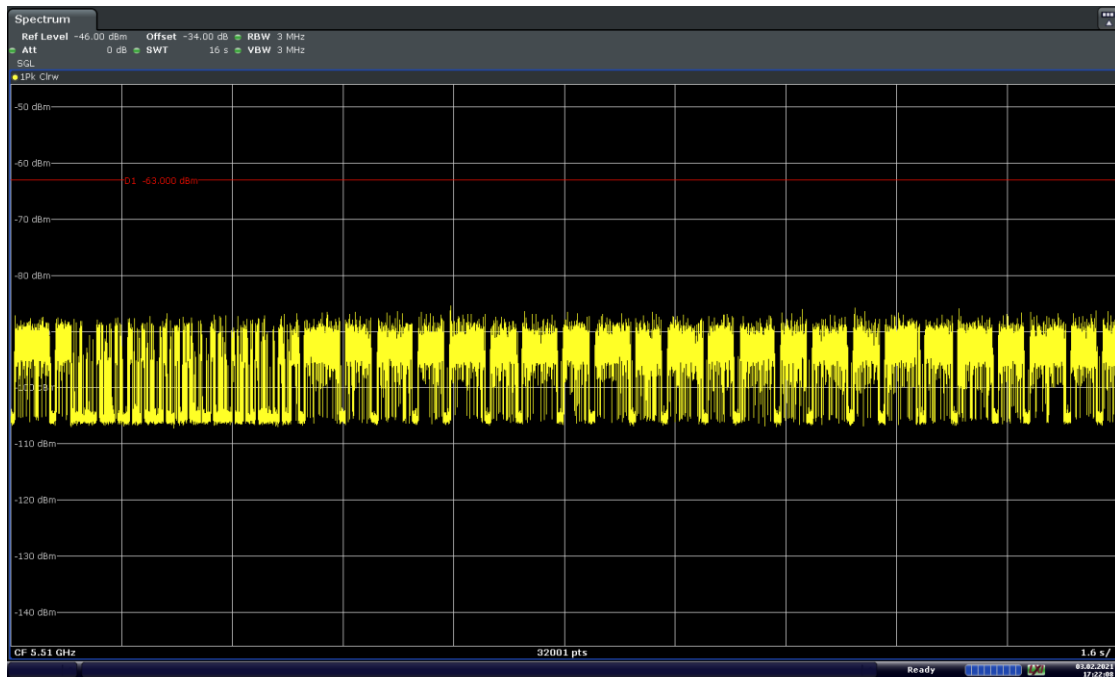


Figure 9-9. 5510MHz - Channel Loading - Mode 2 (40MHz)

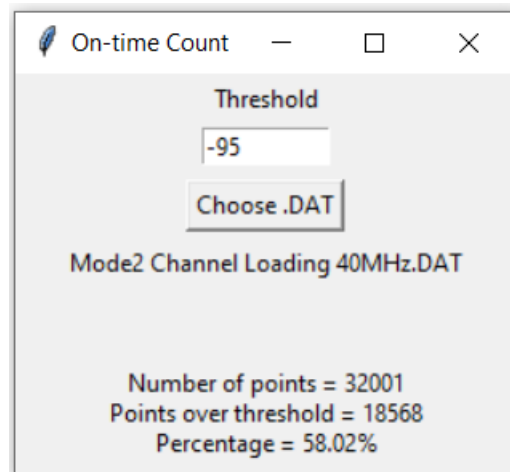


Figure 9-10 5510MHz - Channel Loading Calculation - Mode 2 (40MHz)

|                                         |                                                                                                                                                                                                              |                                       |                                 |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      |  <b>PCTEST</b><br>Proud to be part of  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021                                                                                                                                                                         | EUT Type:<br>Tablet Device            | Page 30 of 54                   |

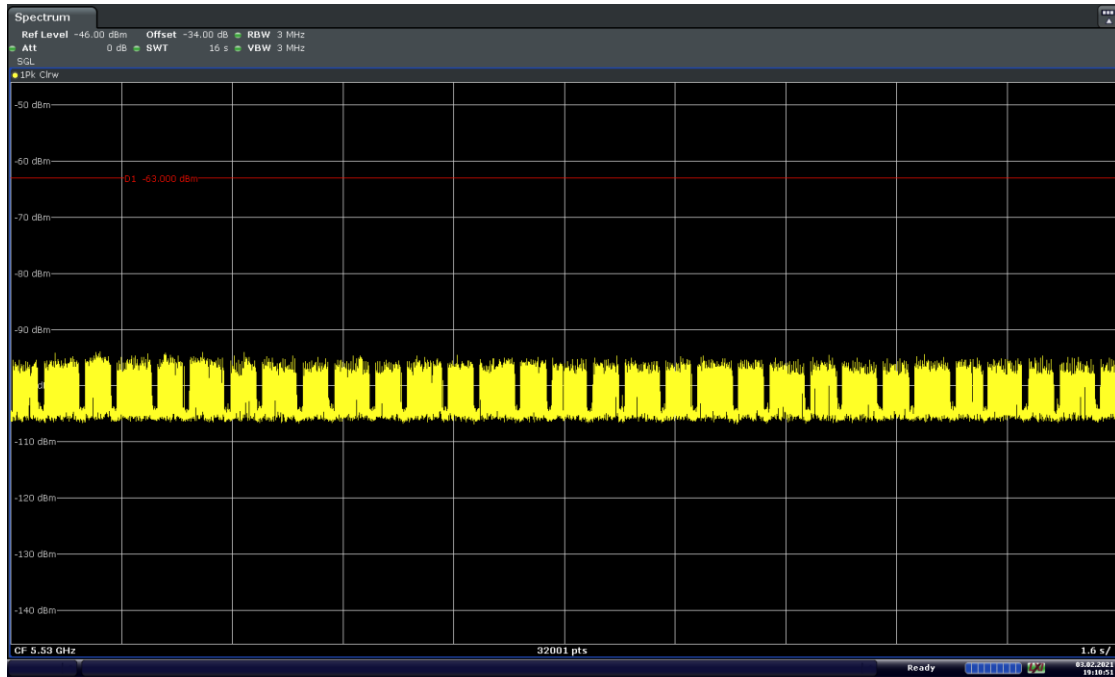


Figure 9-11. 5530MHz - Channel Loading - Mode 2 (80MHz)

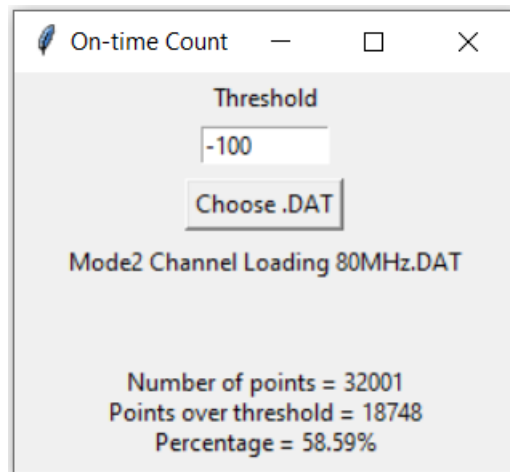


Figure 9-12. 5530MHz - Channel Loading Calculation - Mode 2 (80MHz)

|                                         |                                                                                                                                                                                                              |                                       |                                 |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      |  <b>PCTEST</b><br>Proud to be part of  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021                                                                                                                                                                         | EUT Type:<br>Tablet Device            | Page 31 of 54                   |

### 9.2.3 Channel Loading Mode 3:

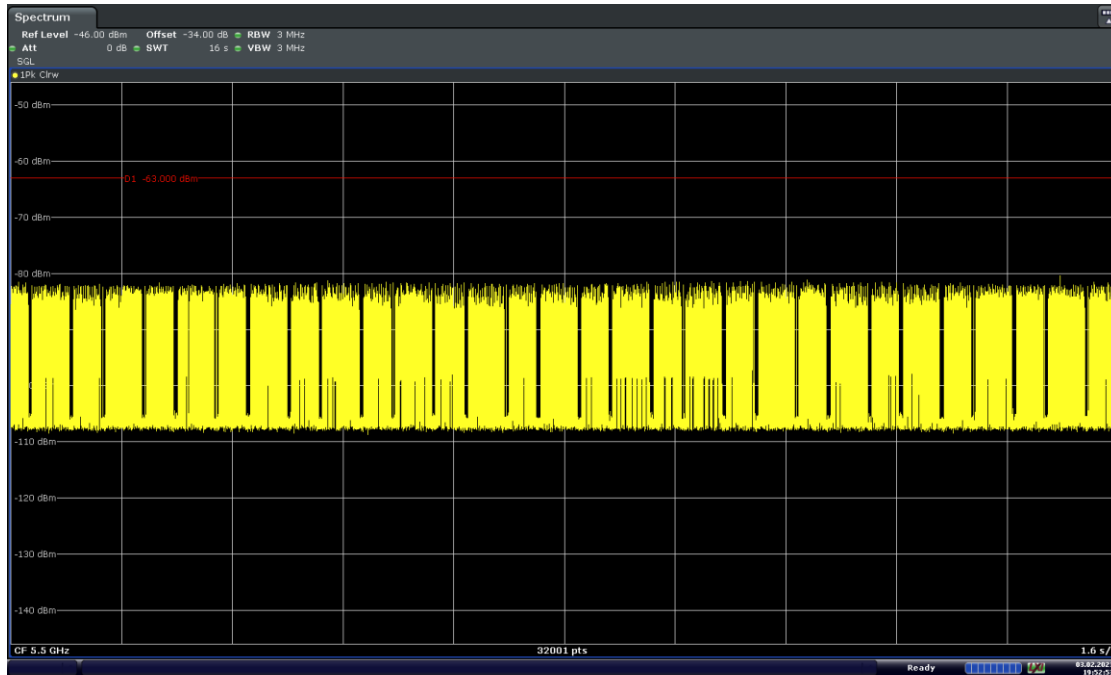


Figure 9-13. 5500MHz - Channel Loading - Mode 3 (20MHz)

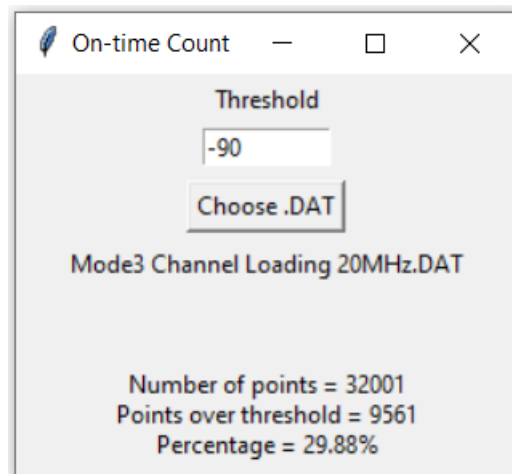


Figure 9-14. 5500MHz - Channel Loading Calculation - Mode 3 (20MHz)

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021                                                | EUT Type:<br>Tablet Device            | Page 32 of 54                   |

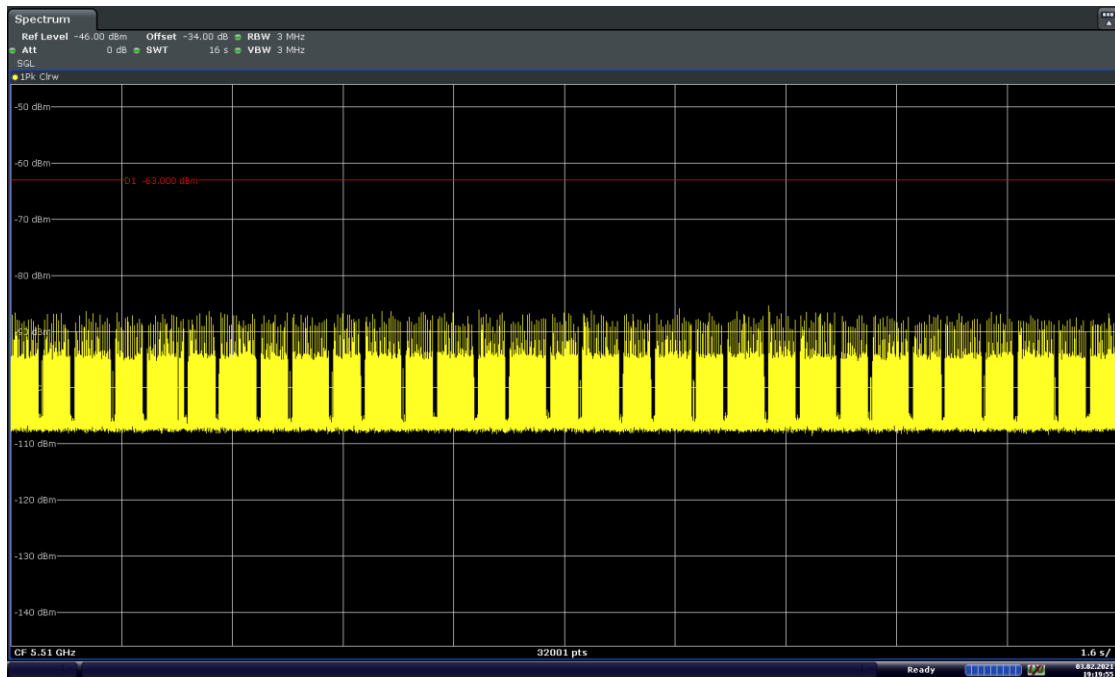


Figure 9-15. 5510MHz - Channel Loading - Mode 3 (40MHz)

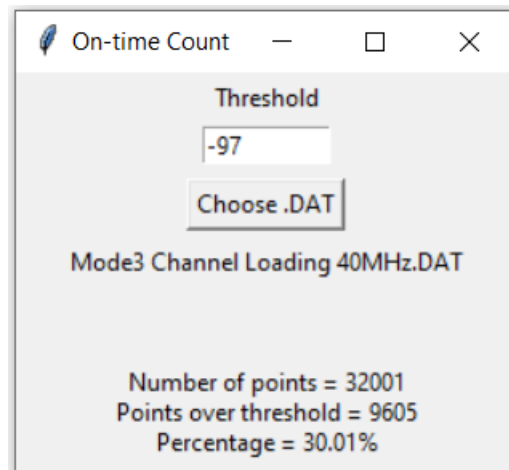


Figure 9-16 5510MHz - Channel Loading Calculation - Mode 3 (40MHz)

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021                                                | EUT Type:<br>Tablet Device            | Page 33 of 54                   |



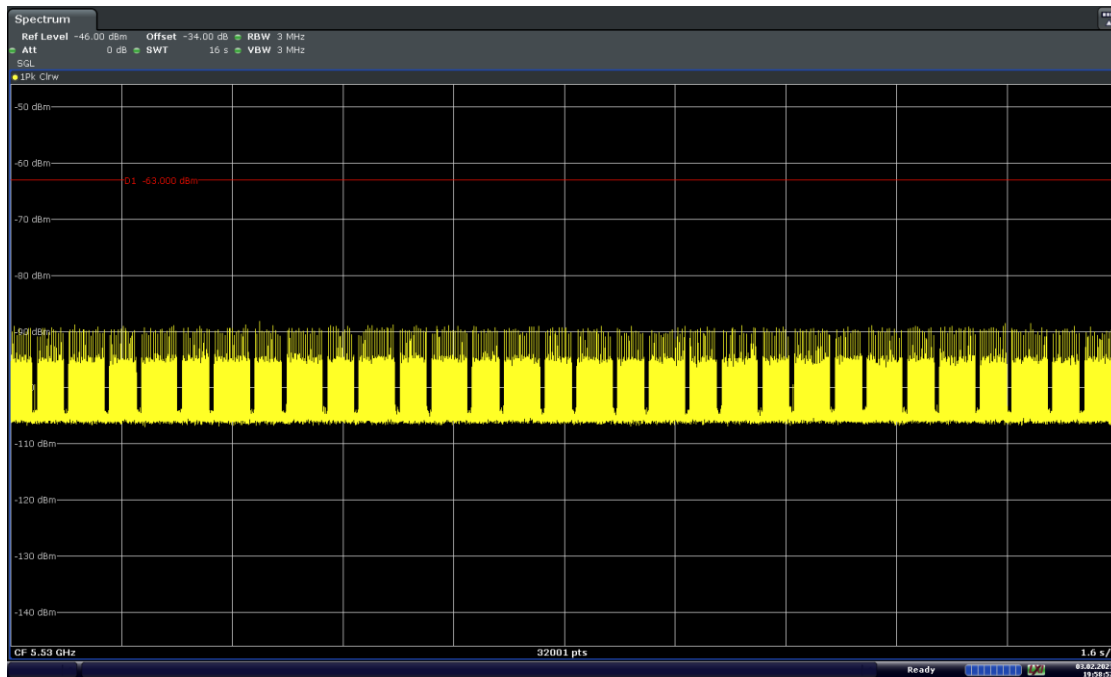


Figure 9-17. 5530MHz - Channel Loading - Mode 3 (80MHz)

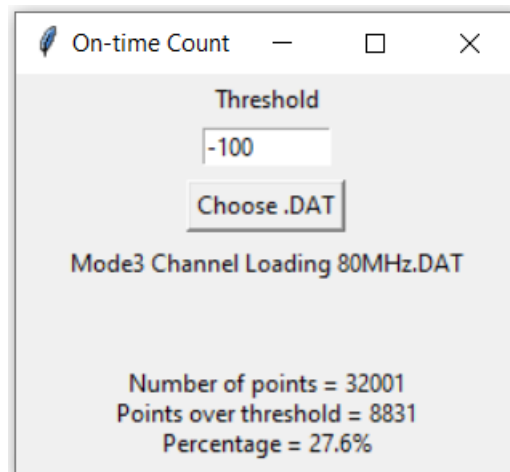


Figure 9-18. 5530MHz - Channel Loading Calculation - Mode 3 (80MHz)

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021                                                | EUT Type:<br>Tablet Device            | Page 34 of 54                   |

## 9.2.4 Channel Loading Mode 4:

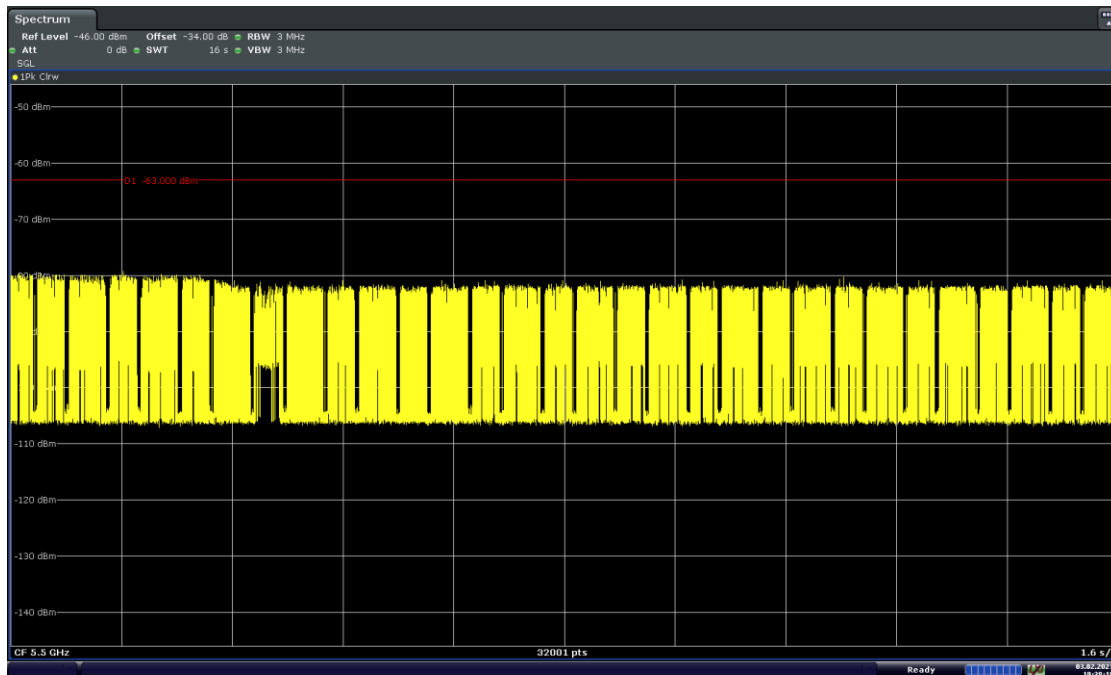


Figure 9-19. 5500 MHz - Channel Loading - Mode 4 (20MHz)

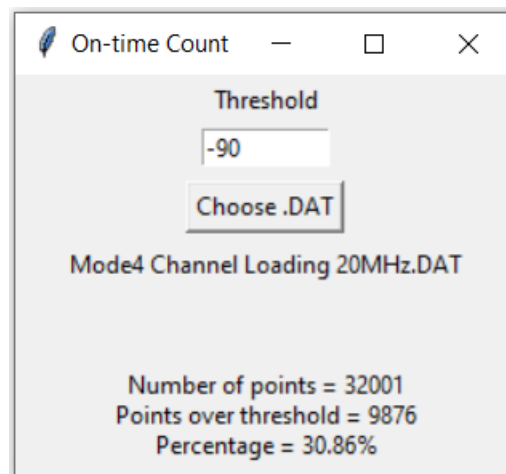


Figure 9-20. 5500MHz - Channel Loading Calculation - Mode 4 (20MHz)

|                                         |                                              |                                       |                                 |
|-----------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021         | EUT Type:<br>Tablet Device            | Page 35 of 54                   |

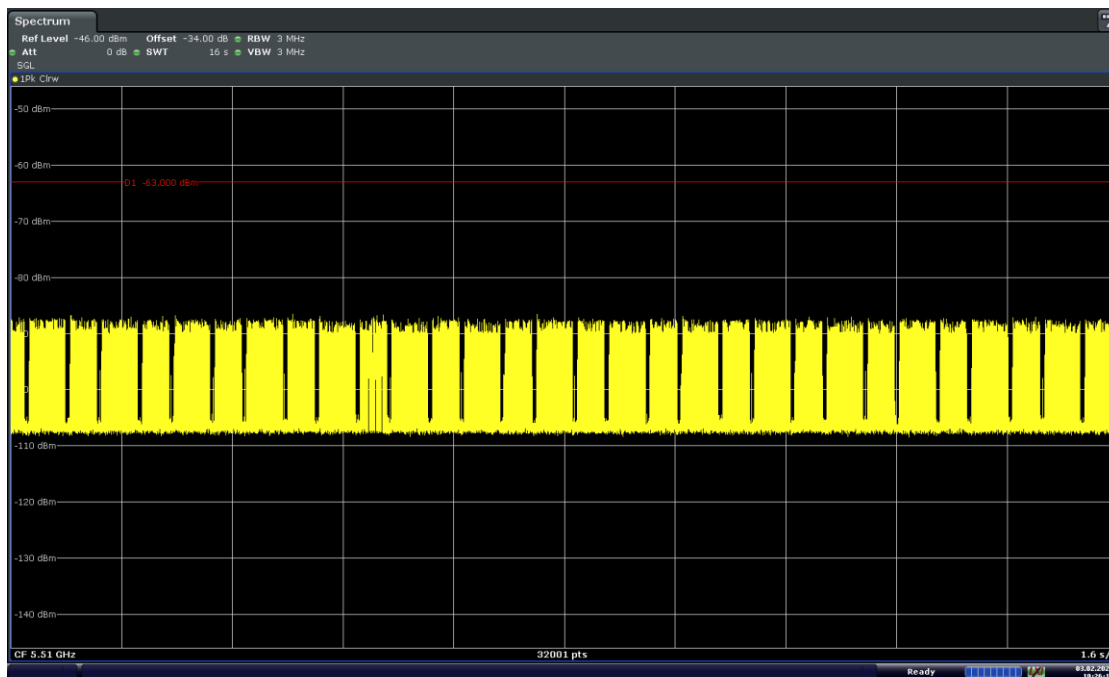


Figure 9-21. 5510MHz - Channel Loading - Mode 4 (40MHz)

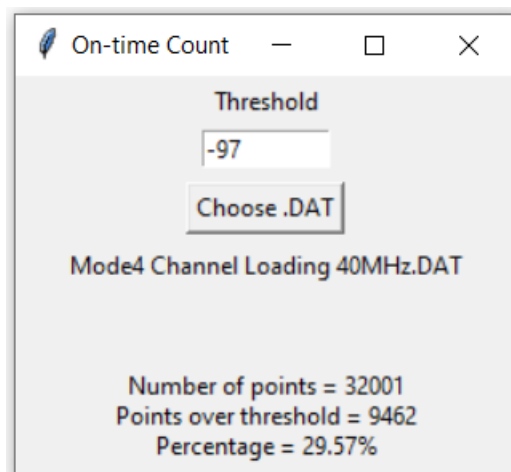


Figure 9-22. 5510MHz - Channel Loading Calculation - Mode 4 (40MHz)

|                                         |                                              |                                       |                                 |
|-----------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021         | EUT Type:<br>Tablet Device            | Page 36 of 54                   |

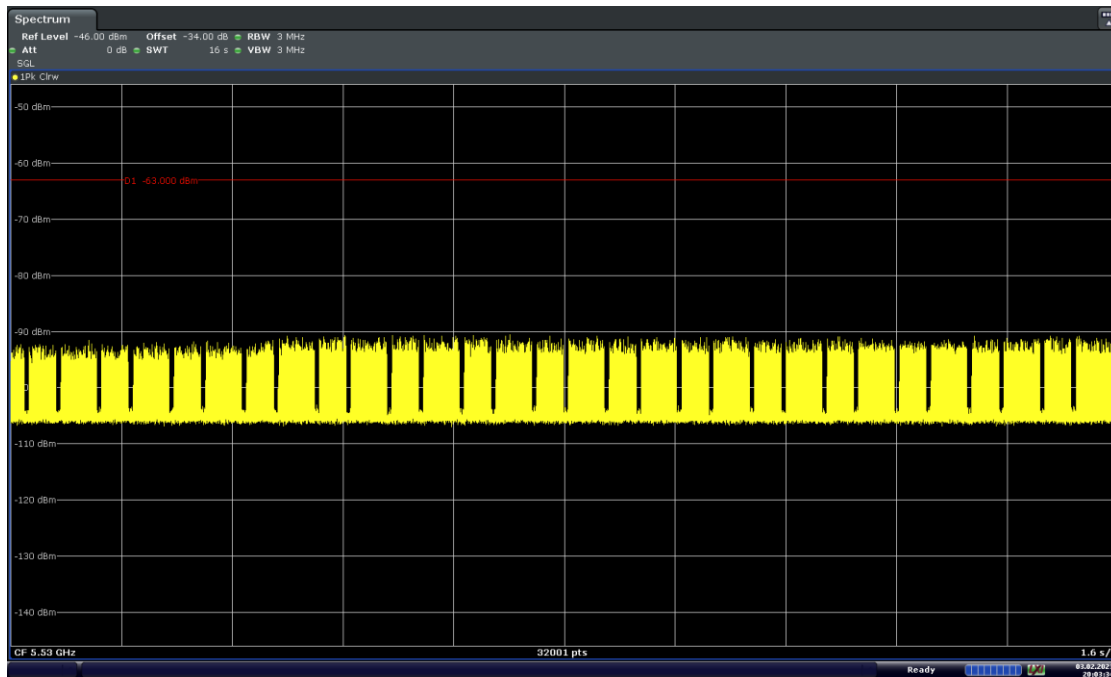


Figure 9-23. 5530MHz - Channel Loading - Mode 4 (80MHz)

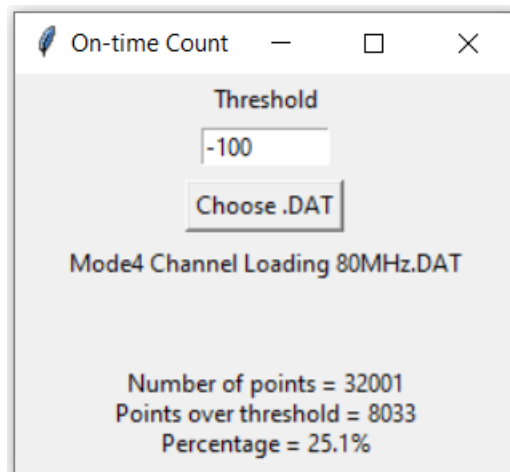


Figure 9-24. 5530MHz - Channel Loading Calculation - Mode 4 (80MHz)

|                                         |                                                                                                                                                                                                              |                                       |                                 |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      |  <b>PCTEST</b><br>Proud to be part of  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021                                                                                                                                                                         | EUT Type:<br>Tablet Device            | Page 37 of 54                   |

## 9.3 Channel Move/ Closing Transmission Time

### 9.3.1 Channel Move/ Closing Transmission Time Mode 1:

#### Result

| Parameter                         | Measured                              |                                       |                                      | Limit                                                            |
|-----------------------------------|---------------------------------------|---------------------------------------|--------------------------------------|------------------------------------------------------------------|
|                                   | 20MHz Bandwidth                       | 40MHz Bandwidth                       | 80MHz Bandwidth                      |                                                                  |
| Channel Move Time                 | 4.161 s                               | 4.129 s                               | 0.084 s                              | 10 seconds                                                       |
| Channel Closing Transmission Time | < 200ms<br>+ 19.185 ms<br>(aggregate) | < 200ms<br>+ 19.308 ms<br>(aggregate) | < 200ms<br>+ 0.000 ms<br>(aggregate) | 200 ms + aggregate of<br>60ms over remaining<br>10 second period |

#### Notes:

1. The pulses shown in the plots below have been determined to be from the Master AP.
2. Marker Info and Aggregate time results are shown on the right side of the plots below.



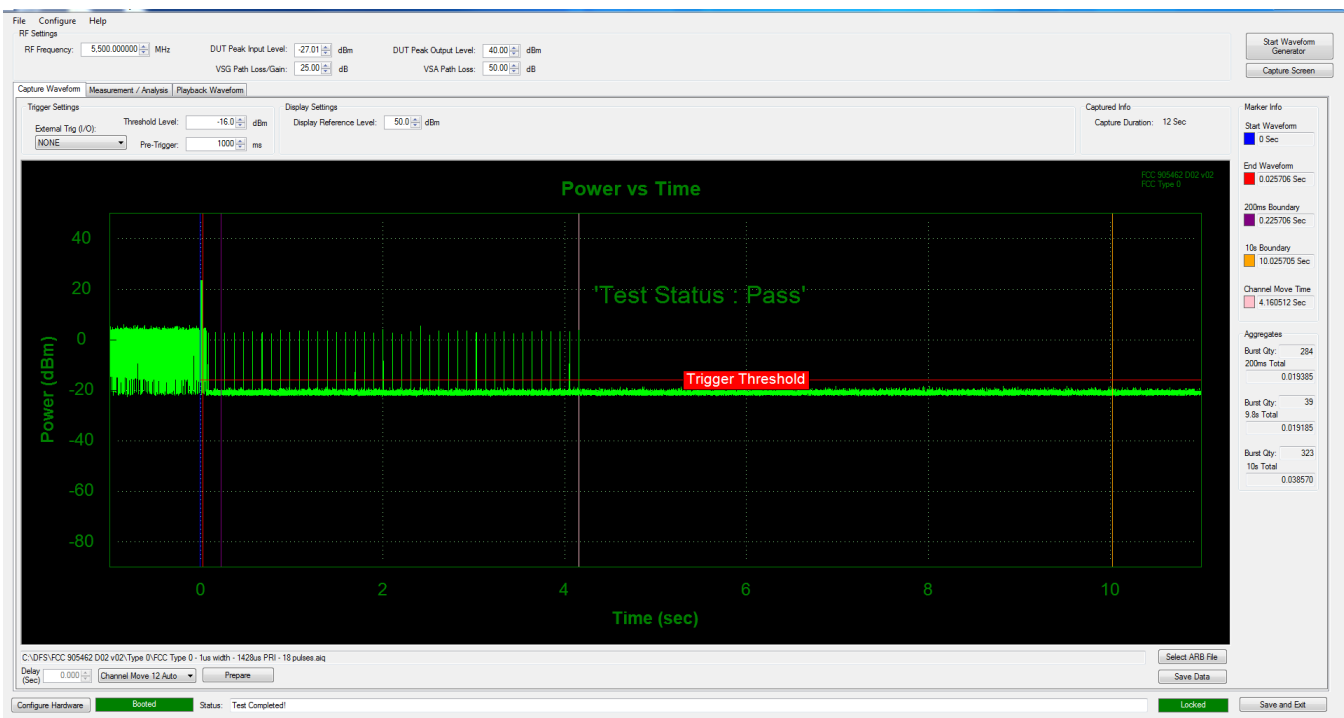


Figure 9-25. 5500MHz - Channel Move/ Closing Transmission Time - Mode 1 (20 MHz)

|                                         |                                              |                                       |                                 |
|-----------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021         | EUT Type:<br>Tablet Device            | Page 38 of 54                   |

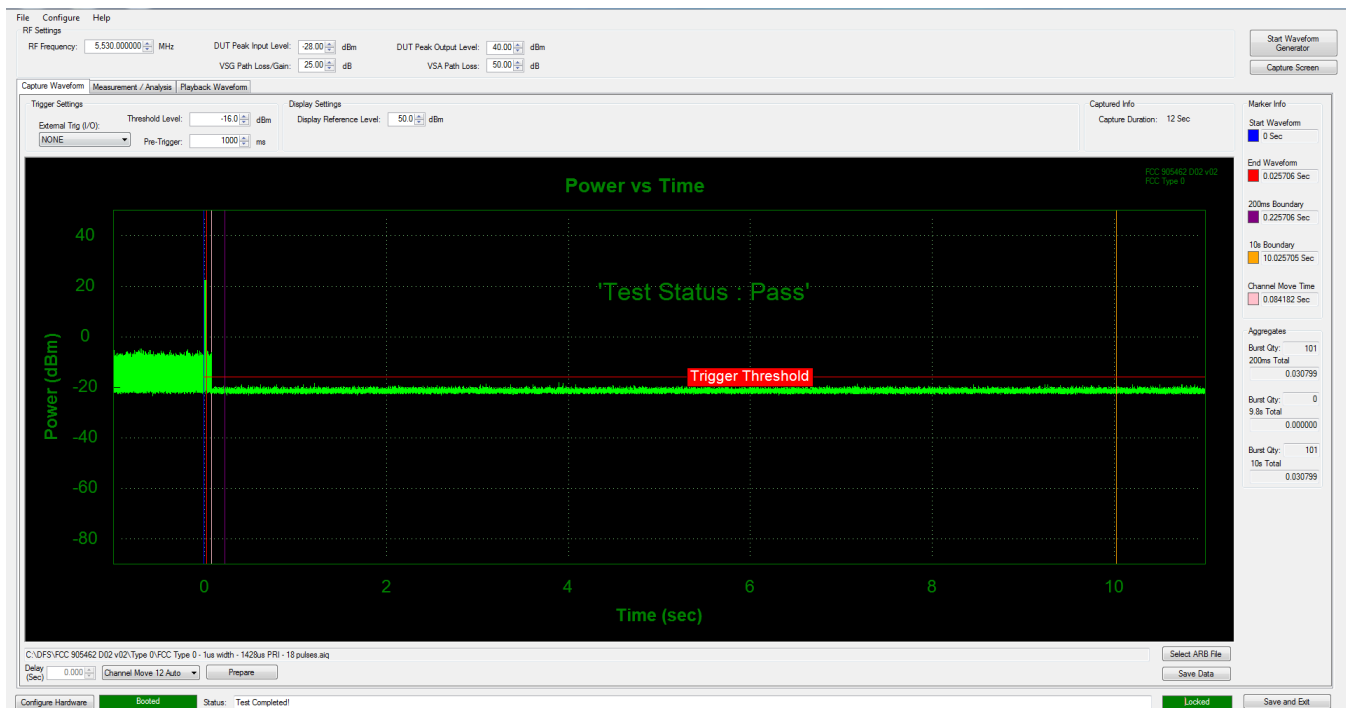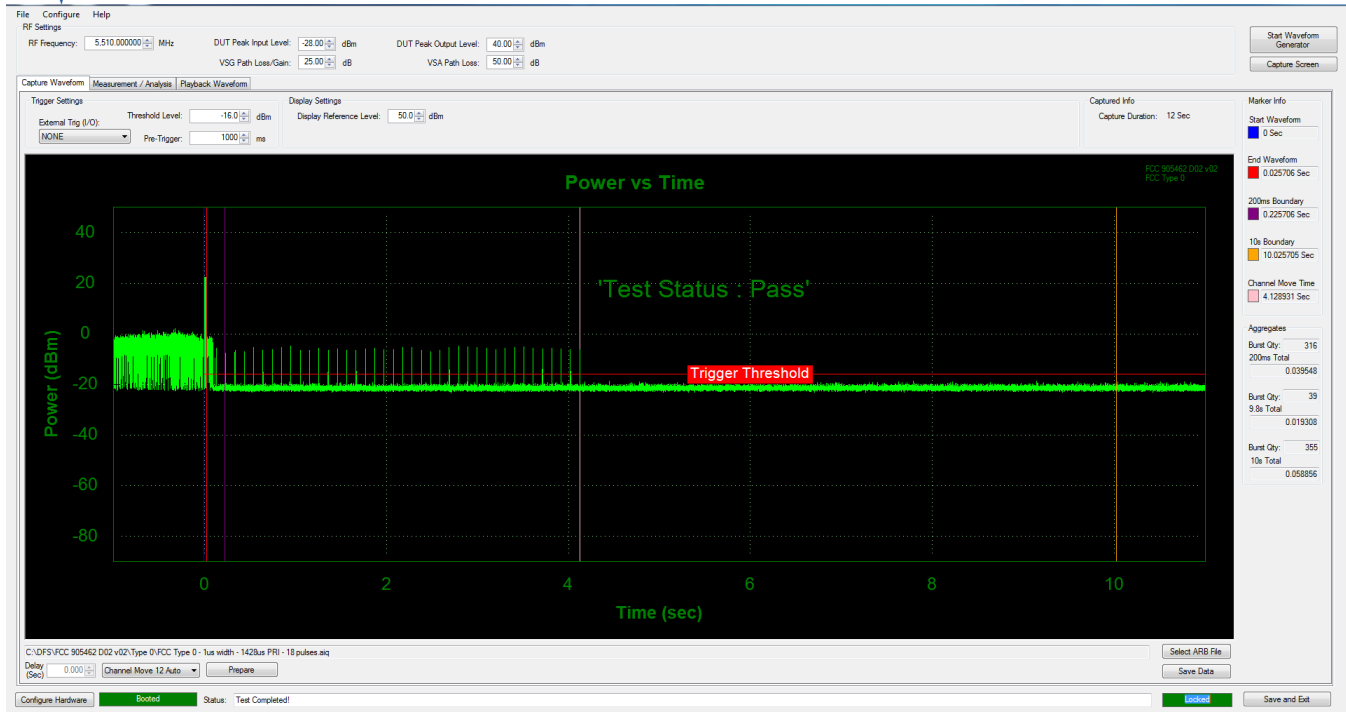

|                                         |                                              |                                       |                                 |
|-----------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021         | EUT Type:<br>Tablet Device            | Page 39 of 54                   |

### 9.3.2 Channel Move/ Closing Transmission Time Mode 2:

#### Result:

| Parameter                         | Measured                              |                                       |                                      | Limit                                                            |
|-----------------------------------|---------------------------------------|---------------------------------------|--------------------------------------|------------------------------------------------------------------|
|                                   | 20MHz Bandwidth                       | 40MHz Bandwidth                       | 80MHz Bandwidth                      |                                                                  |
| Channel Move Time                 | 4.133 s                               | 4.134 s                               | 0.026 s                              | 10 seconds                                                       |
| Channel Closing Transmission Time | < 200ms<br>+ 19.646 ms<br>(aggregate) | < 200ms<br>+ 19.698 ms<br>(aggregate) | < 200ms<br>+ 0.000 ms<br>(aggregate) | 200 ms + aggregate of<br>60ms over remaining<br>10 second period |

#### Notes:

1. The pulses shown in the plots below have been determined to be from the Master AP.
2. Marker Info and Aggregate time results are shown on the right side of the plots below.



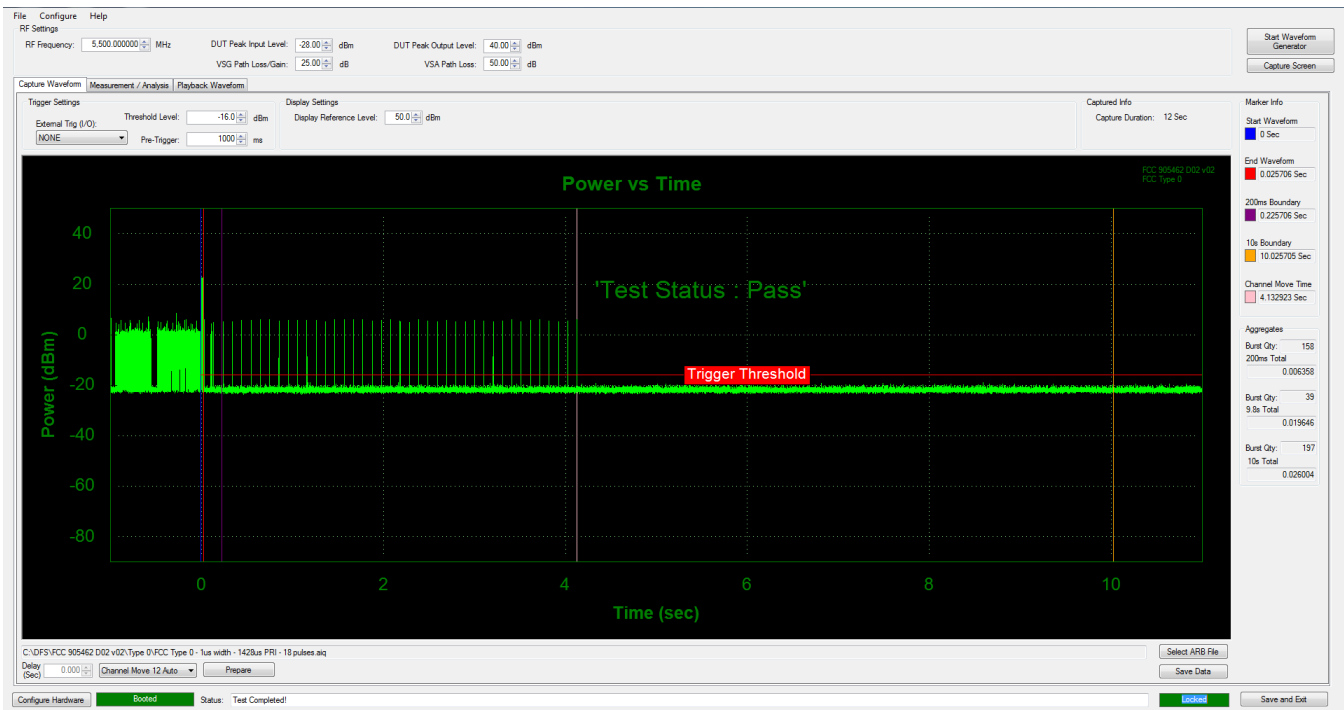


Figure 9-28. 5500MHz - Channel Move/ Closing Transmission Time - Mode 2 (20 MHz)

|                                         |                                                                                     |                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021                                                | EUT Type:<br>Tablet Device            | Page 40 of 54                   |

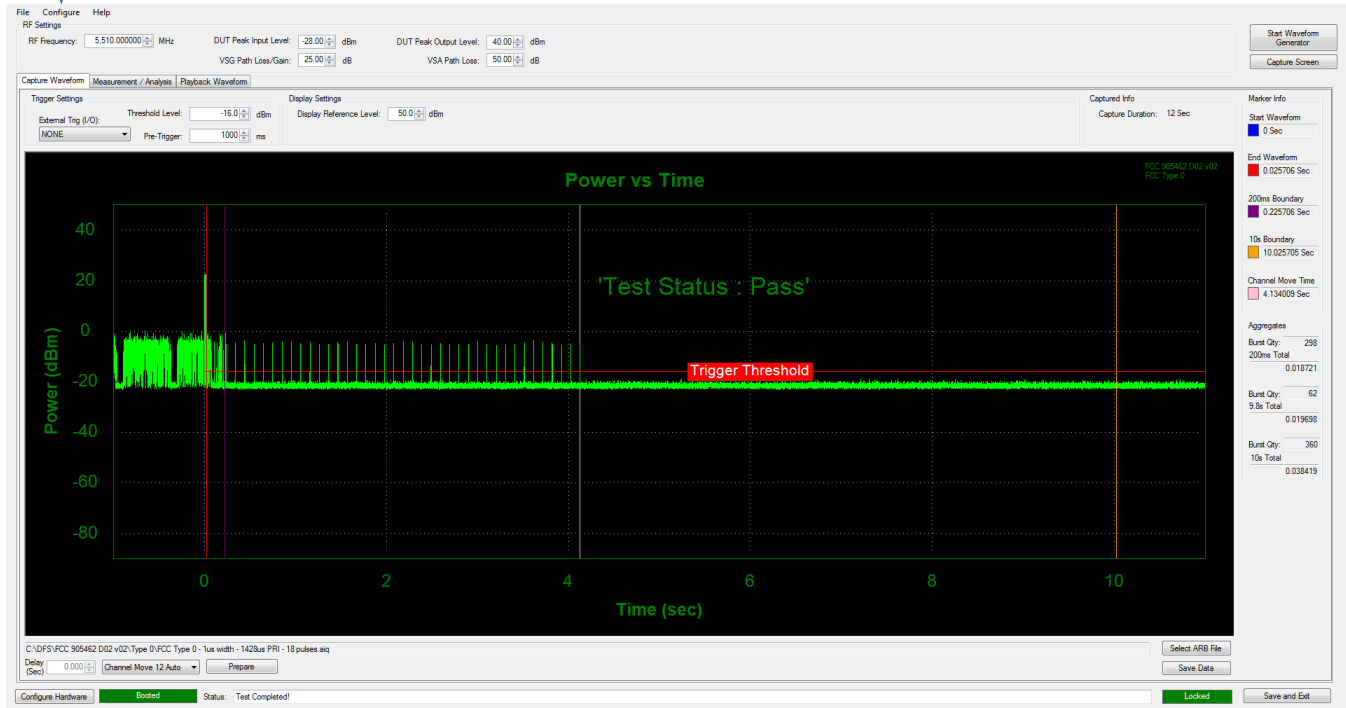

**Figure 9-29. 5510MHz - Channel Move/ Closing Transmission Time - Mode 2 (40 MHz)**

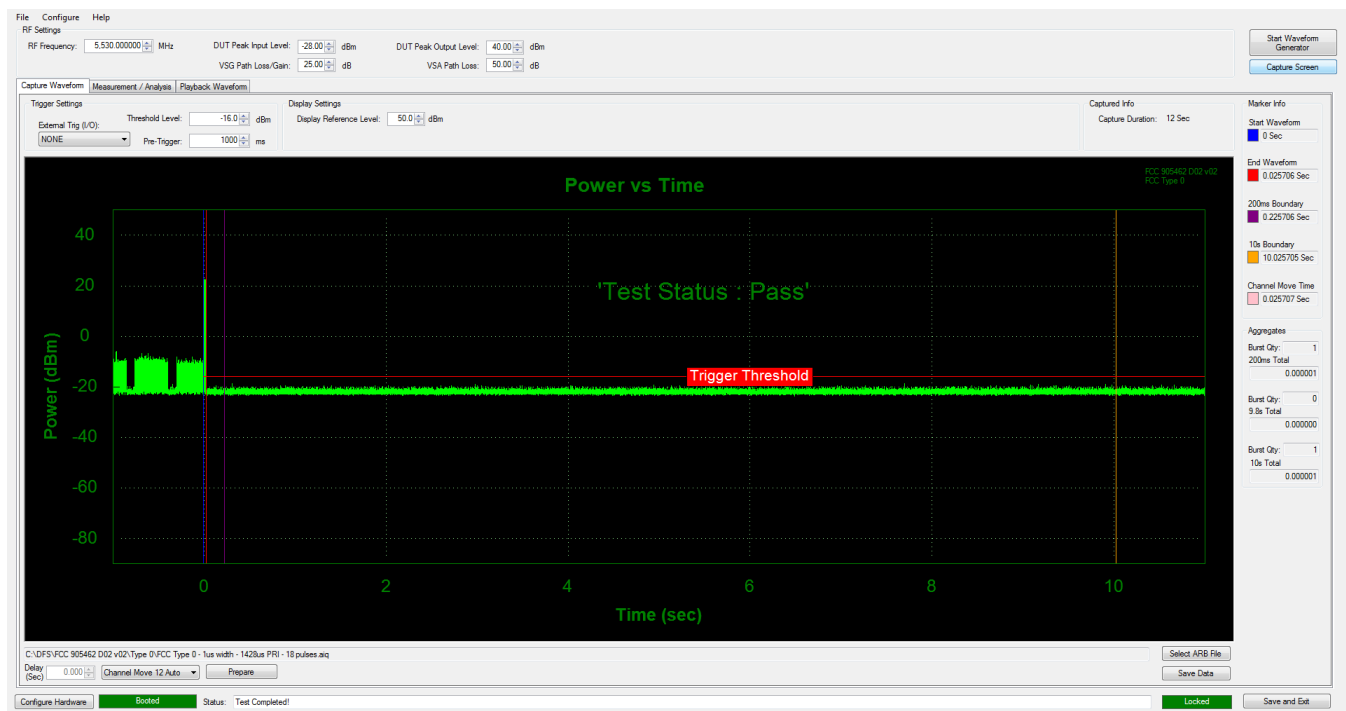

**Figure 9-30. 5530MHz - Channel Move/ Closing Transmission Time - Mode 2 (80 MHz)**

|                                         |                                                     |                                       |                                 |
|-----------------------------------------|-----------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      | <b>PCTEST</b><br>Proud to be part of <b>element</b> | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021                | EUT Type:<br>Tablet Device            | Page 41 of 54                   |



### 9.3.3 Channel Move/ Closing Transmission Time Mode 3:

#### Result:

| Parameter                         | Measured                            |                                       |                                      | Limit                                                            |
|-----------------------------------|-------------------------------------|---------------------------------------|--------------------------------------|------------------------------------------------------------------|
|                                   | 20MHz Bandwidth                     | 40MHz Bandwidth                       | 80MHz Bandwidth                      |                                                                  |
| Channel Move Time                 | 4.059 s                             | 4.143 s                               | 0.061 s                              | 10 seconds                                                       |
| Channel Closing Transmission Time | < 200ms<br>18.694 ms<br>(aggregate) | < 200ms<br>+ 18.917 ms<br>(aggregate) | < 200ms<br>+ 0.000 ms<br>(aggregate) | 200 ms + aggregate of<br>60ms over remaining<br>10 second period |

#### Notes:

1. The pulses shown in the plots below have been determined to be from the Master AP.
2. Marker Info and Aggregate time results are shown on the right side of the plots below.



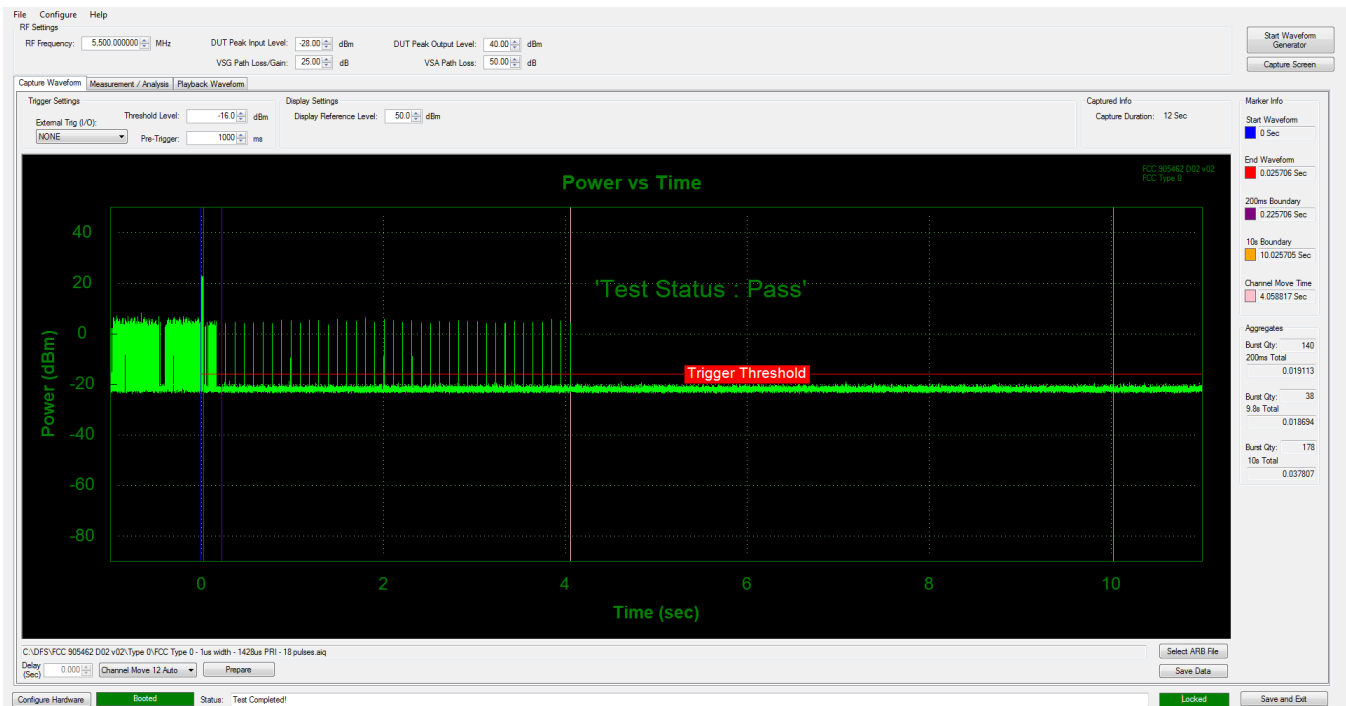


Figure 9-31. 5500MHz - Channel Move/ Closing Transmission Time - Mode 3 (20 MHz)

|                                         |                                              |                                       |                                 |
|-----------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021         | EUT Type:<br>Tablet Device            | Page 42 of 54                   |

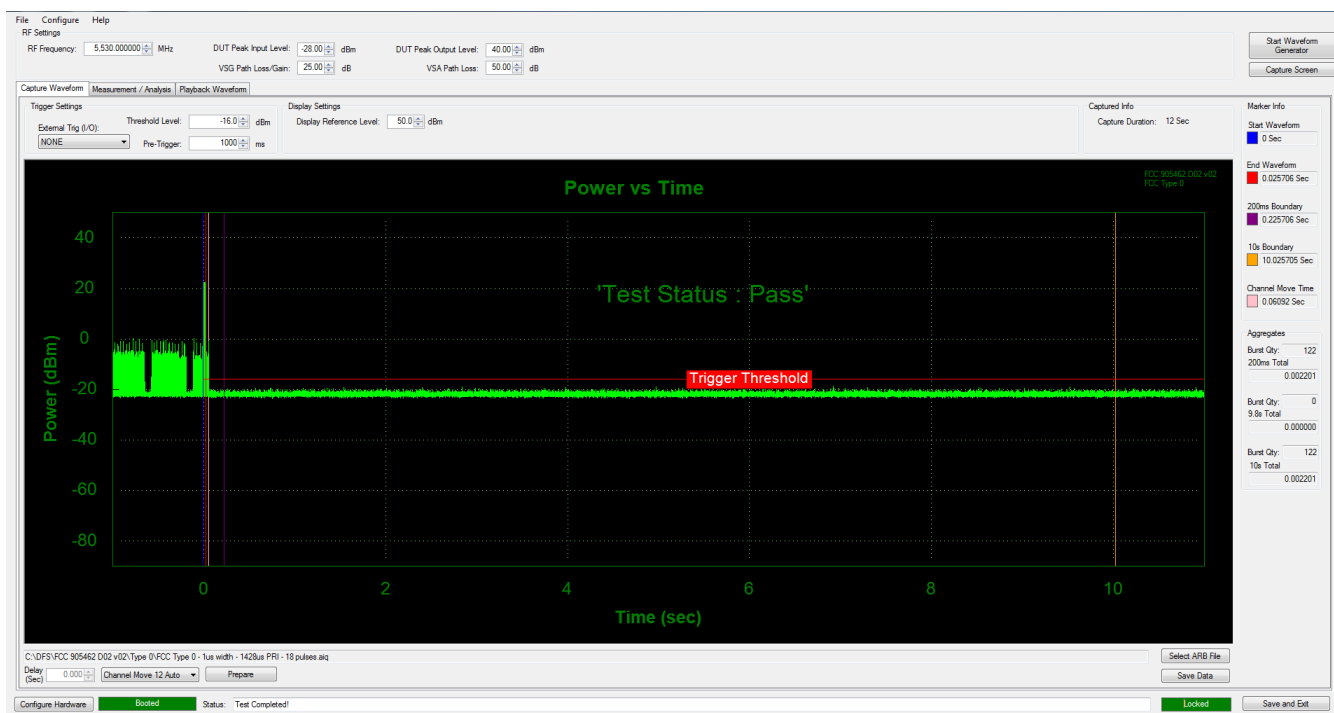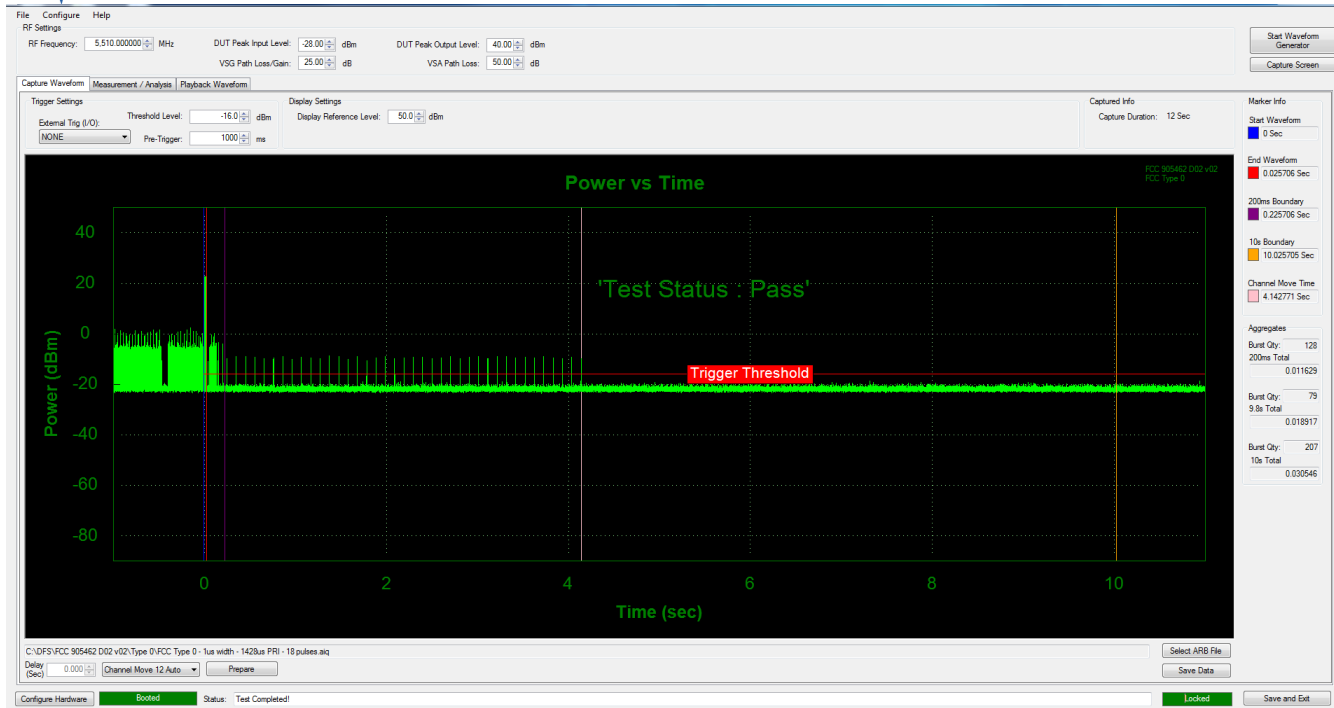

|                                         |                                              |                                       |                                 |
|-----------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021         | EUT Type:<br>Tablet Device            | Page 43 of 54                   |

### 9.3.4 Channel Move/ Closing Transmission Time Mode 4:

#### Result:

| Parameter                         | Measured                        |                                 |                                | Limit                                                      |
|-----------------------------------|---------------------------------|---------------------------------|--------------------------------|------------------------------------------------------------|
|                                   | 20MHz Bandwidth                 | 40MHz Bandwidth                 | 80MHz Bandwidth                |                                                            |
| Channel Move Time                 | 4.179 s                         | 4.204 s                         | 0.132 s                        | 10 seconds                                                 |
| Channel Closing Transmission Time | < 200ms + 19.183 ms (aggregate) | < 200ms + 18.574 ms (aggregate) | < 200ms + 0.000 ms (aggregate) | 200 ms + aggregate of 60ms over remaining 10 second period |

#### Notes:

1. The pulses shown in the plots below have been determined to be from the Master AP.
2. Marker Info and Aggregate time results are shown on the right side of the plots below.



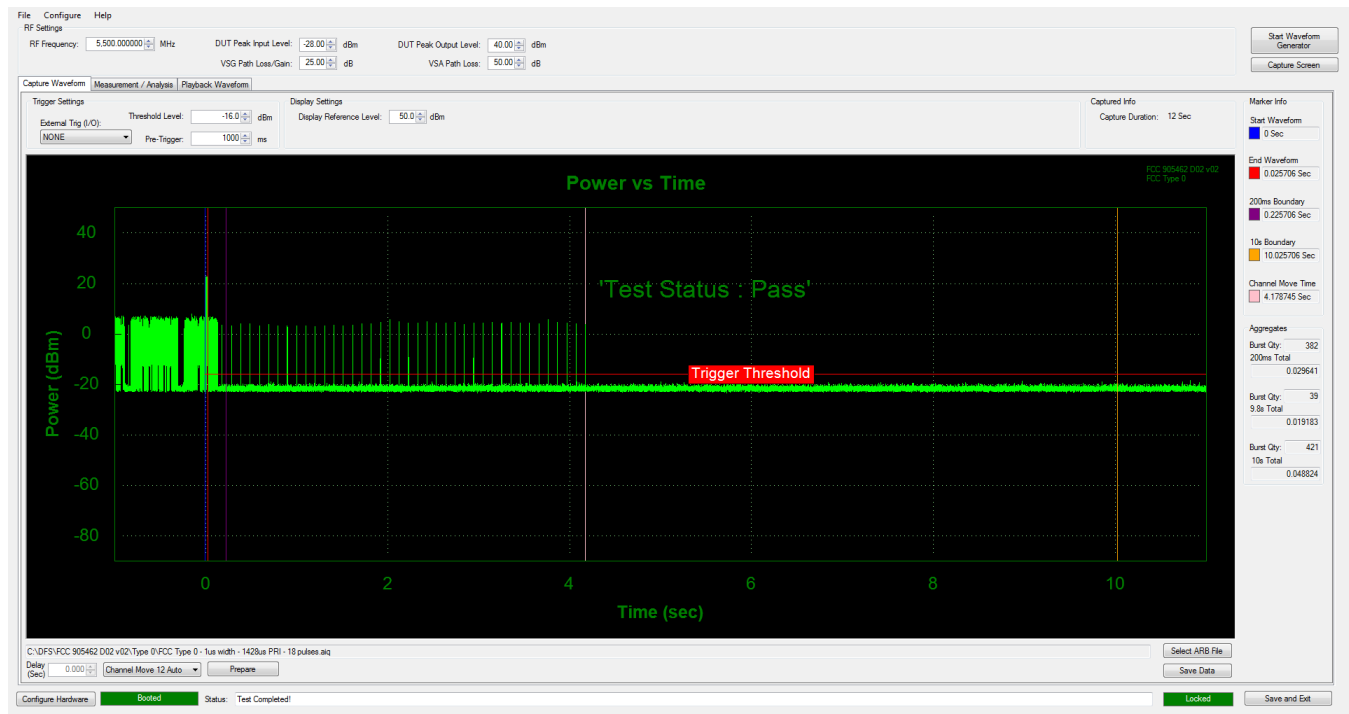


Figure 9-34. 5500MHz - Channel Move/ Closing Transmission Time - Mode 4 (20 MHz)

|                                         |                                              |                                       |                                 |
|-----------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021         | EUT Type:<br>Tablet Device            | Page 44 of 54                   |

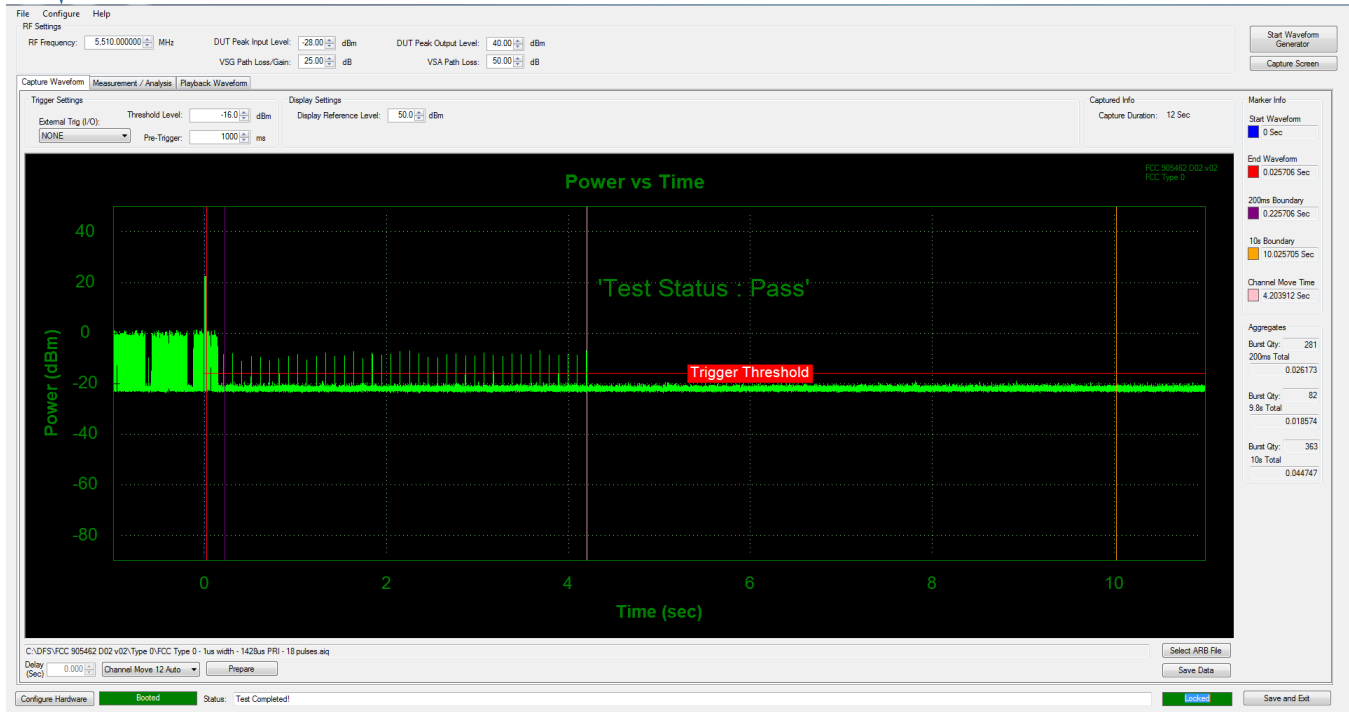

**Figure 9-35. 5510MHz - Channel Move/ Closing Transmission Time - Mode 4 (40 MHz)**

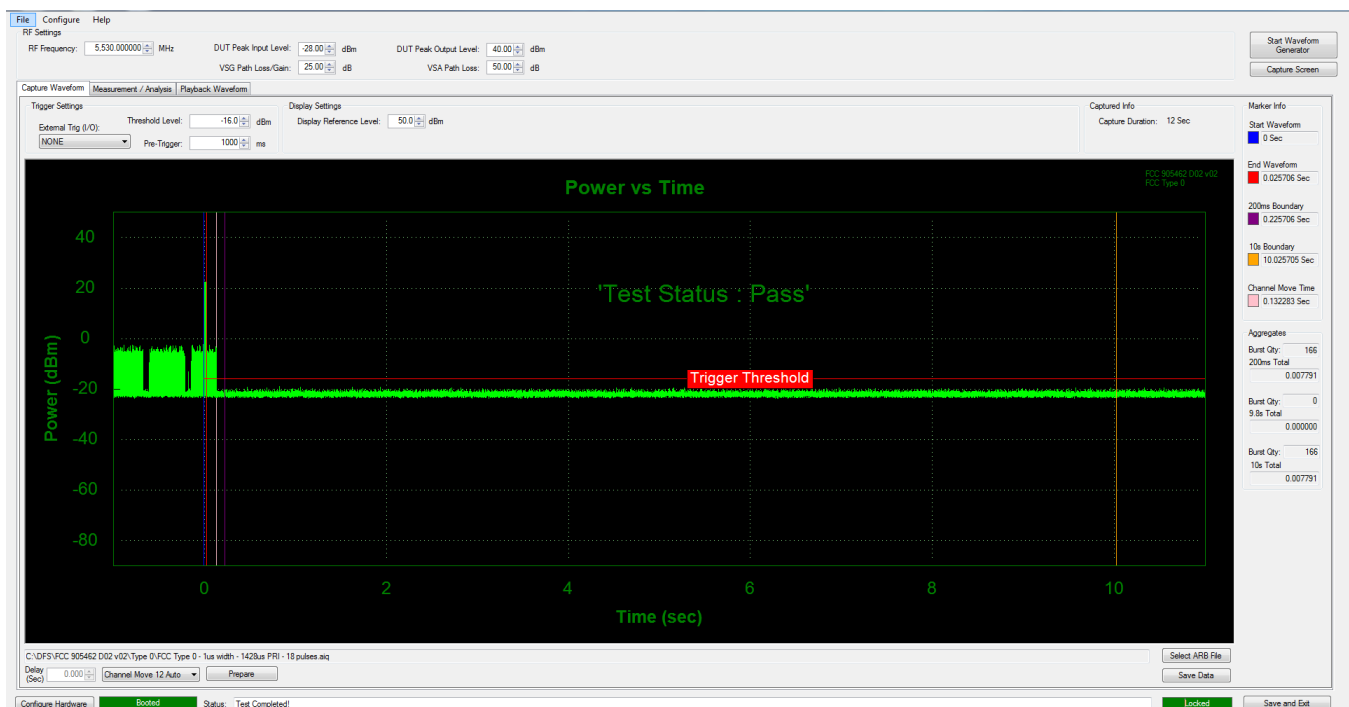

**Figure 9-36. 5530MHz - Channel Move/ Closing Transmission Time - Mode 4 (80 MHz)**

|                                         |                                                     |                                       |                                 |
|-----------------------------------------|-----------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      | <b>PCTEST</b><br>Proud to be part of <b>element</b> | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021                | EUT Type:<br>Tablet Device            | Page 45 of 54                   |

## 9.4 Non-Occupancy Period

### 9.4.1 Non-Occupancy Period (30 Minutes) Mode 1:

#### Notes:

1. No frequency transmission detected during the Non-Occupancy Period of 30 minutes monitoring.

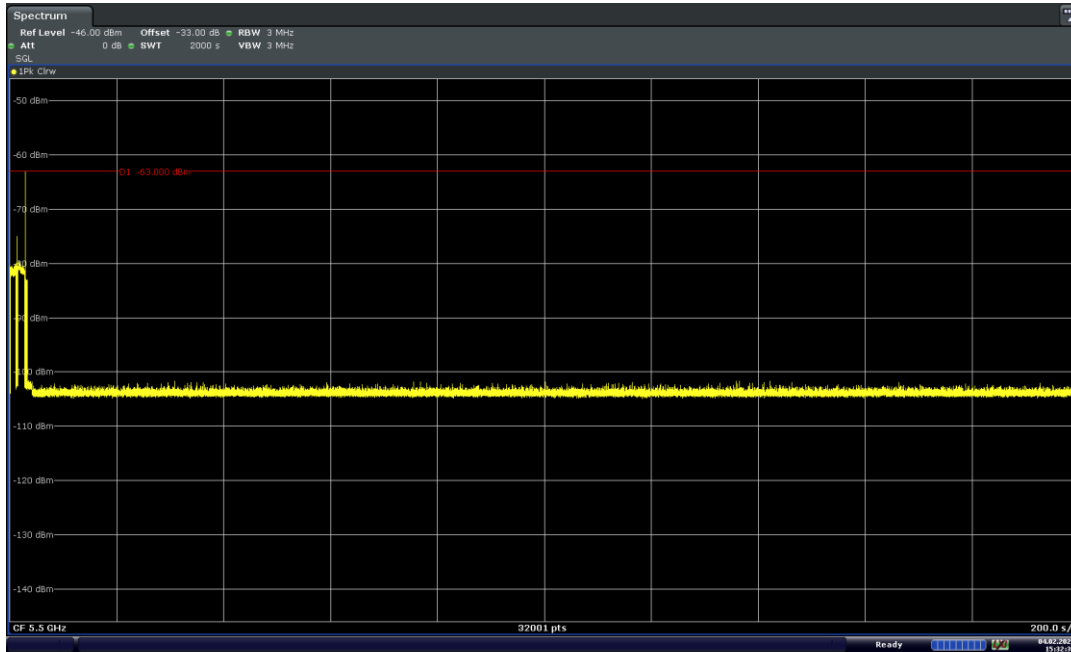


Figure 9-37. 5500MHz - Non-Occupancy Period (30 Minutes) - Mode 1 (20MHz)


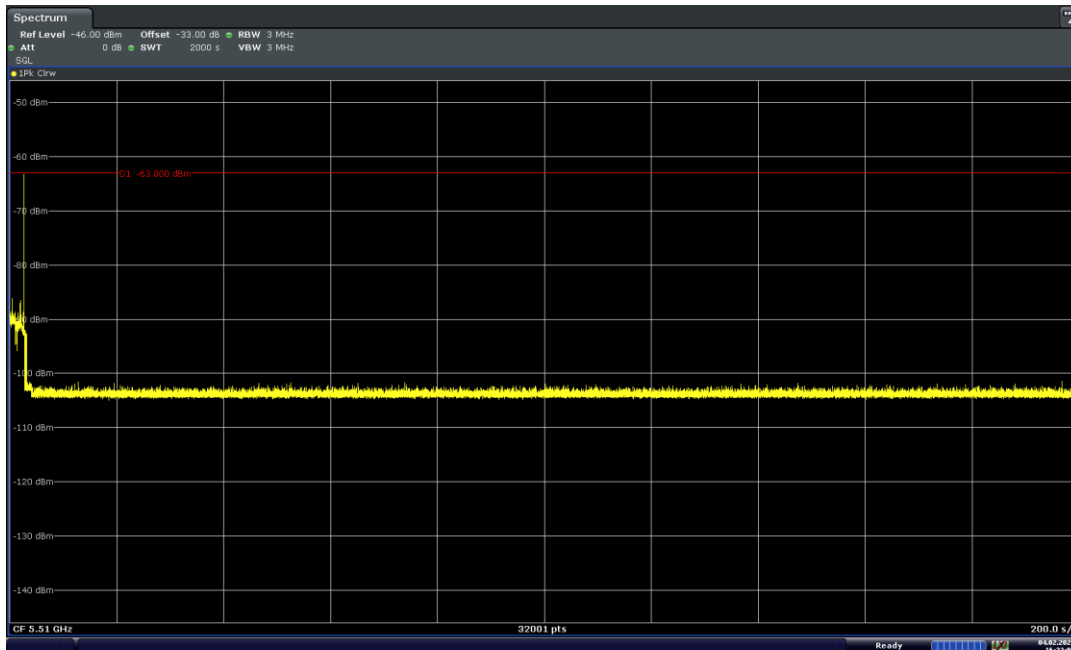


Figure 9-38. 5510MHz - Non-Occupancy Period (30 Minutes) - Mode 1 (40MHz)

|                                         |                                              |                                       |                                 |
|-----------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021         | EUT Type:<br>Tablet Device            | Page 46 of 54                   |

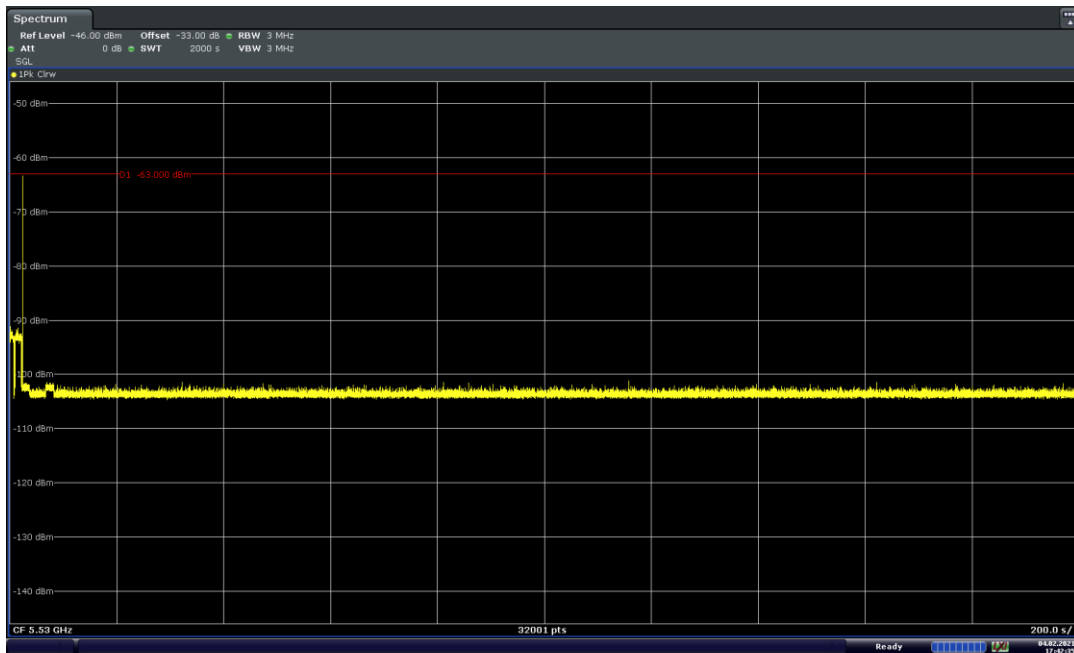

**Figure 9-39. 5530MHz - Non-Occupancy Period (30 Minutes) - Mode 1 (80MHz)**

|                                         |                                                                                                                                                                                                              |                                               |                                        |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|----------------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      |  <b>PCTEST</b><br>Proud to be part of  | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> | <b>Approved by:</b><br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021                                                                                                                                                                         | EUT Type:<br>Tablet Device                    | Page 47 of 54                          |

## 9.4.2 Non-Occupancy Period (30 Minutes) Mode 2:

### Notes:

1. No frequency transmission detected during the Non-Occupancy Period of 30 minutes monitoring.

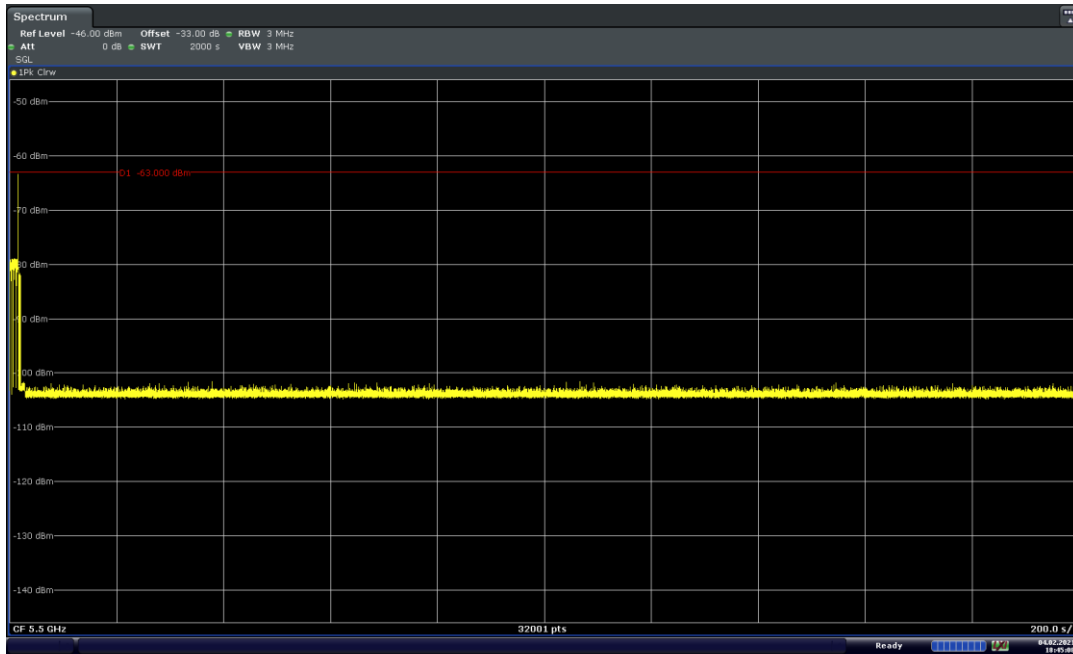


Figure 9-40. 5500MHz - Non-Occupancy Period (30 Minutes) - Mode 2 (20MHz)

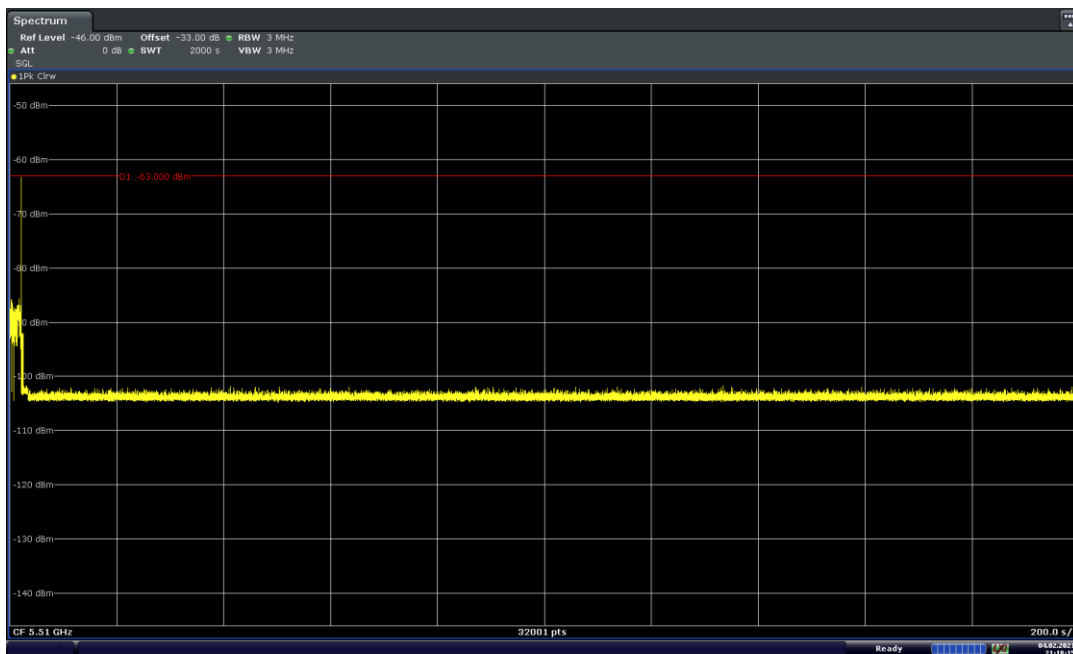


Figure 9-41. 5510MHz - Non-Occupancy Period (30 Minutes) - Mode 2 (40MHz)

|                                         |                                              |                                       |                                 |
|-----------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021         | EUT Type:<br>Tablet Device            | Page 48 of 54                   |

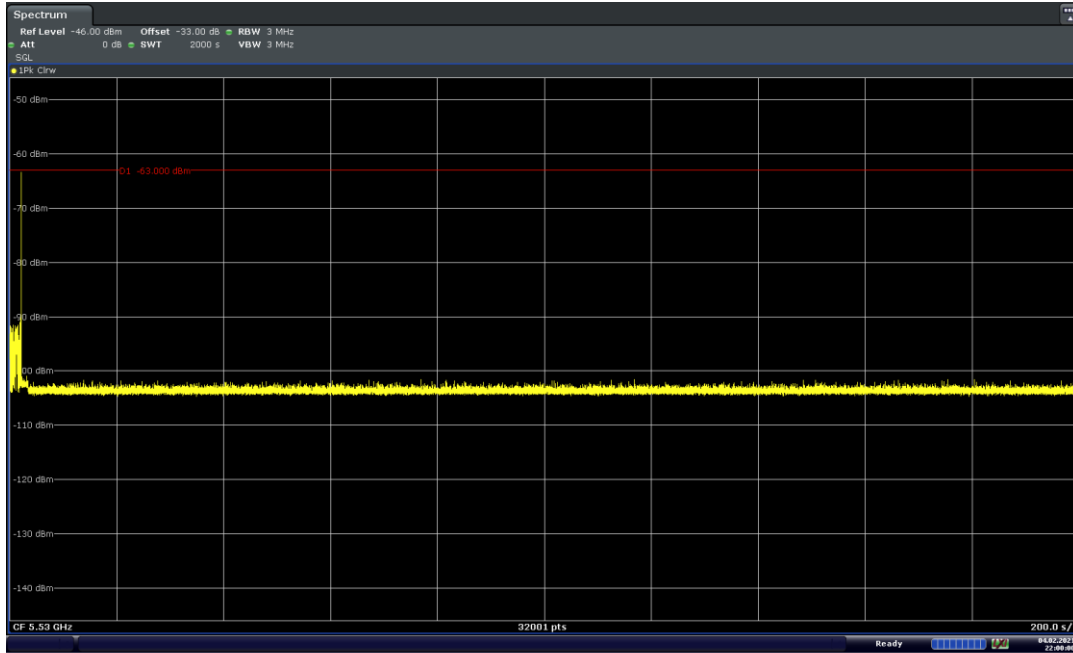


Figure 9-42. 5530MHz - Non-Occupancy Period (30 Minutes) - Mode 2 (80MHz)

|                                         |                                              |                                       |                                 |
|-----------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021         | EUT Type:<br>Tablet Device            | Page 49 of 54                   |



### 9.4.3 Non-Occupancy Period (30 Minutes) Mode 3:

#### Notes:

1. No frequency transmission detected during the Non-Occupancy Period of 30 minutes monitoring.

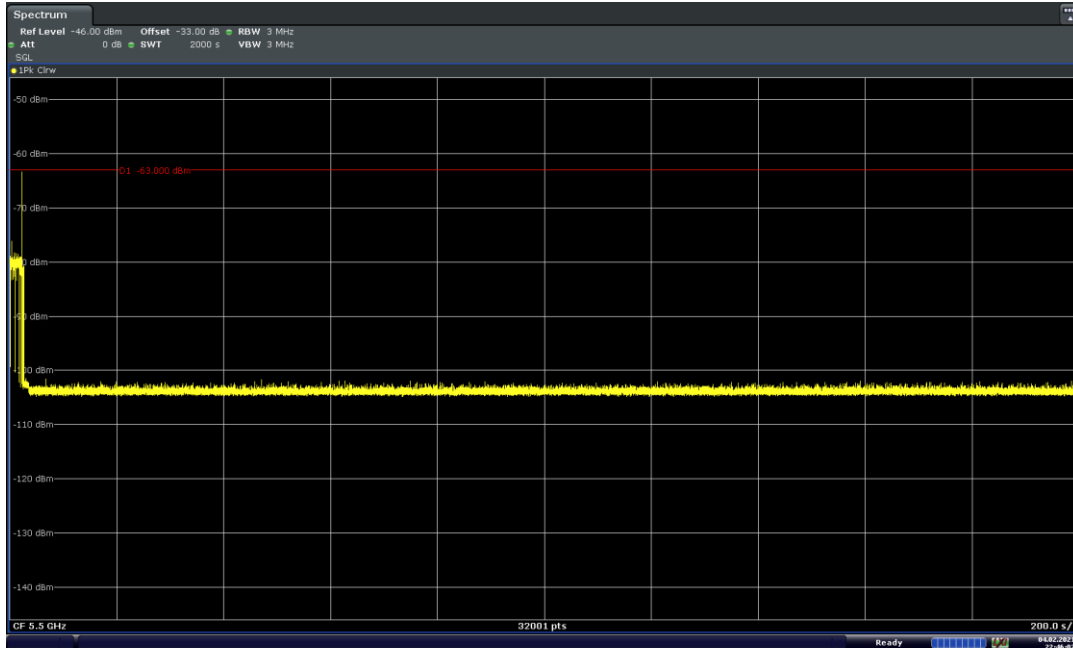


Figure 9-43. 5500MHz - Non-Occupancy Period (30 Minutes) - Mode 3 (20MHz)


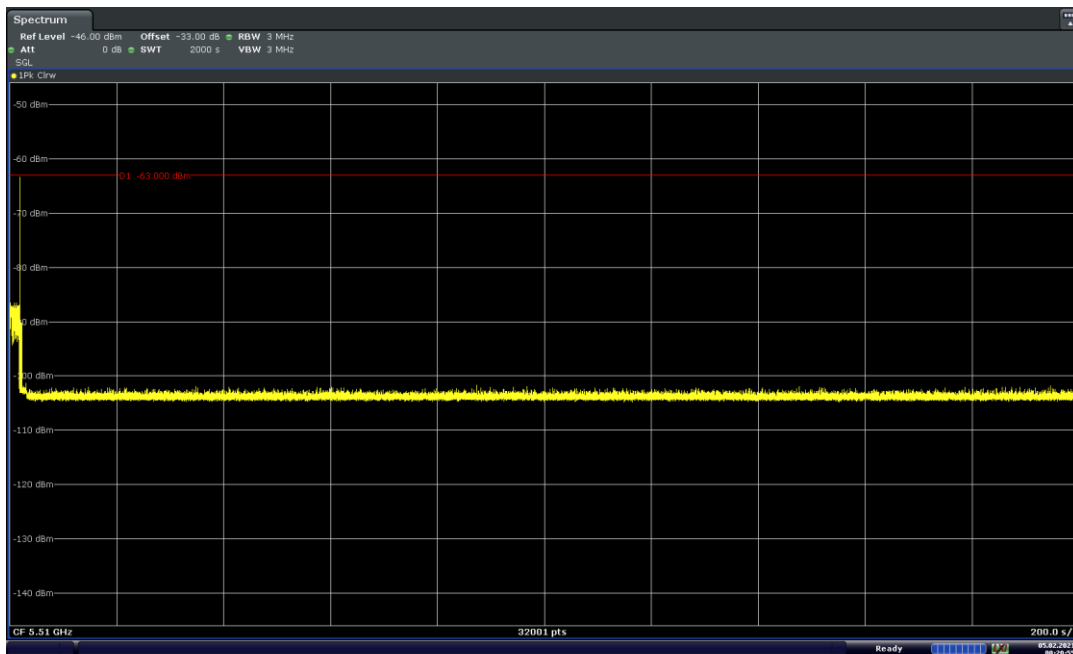


Figure 9-44. 5510MHz - Non-Occupancy Period (30 Minutes) - Mode 3 (40MHz)

|                                         |                                              |                                       |                                 |
|-----------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021         | EUT Type:<br>Tablet Device            | Page 50 of 54                   |

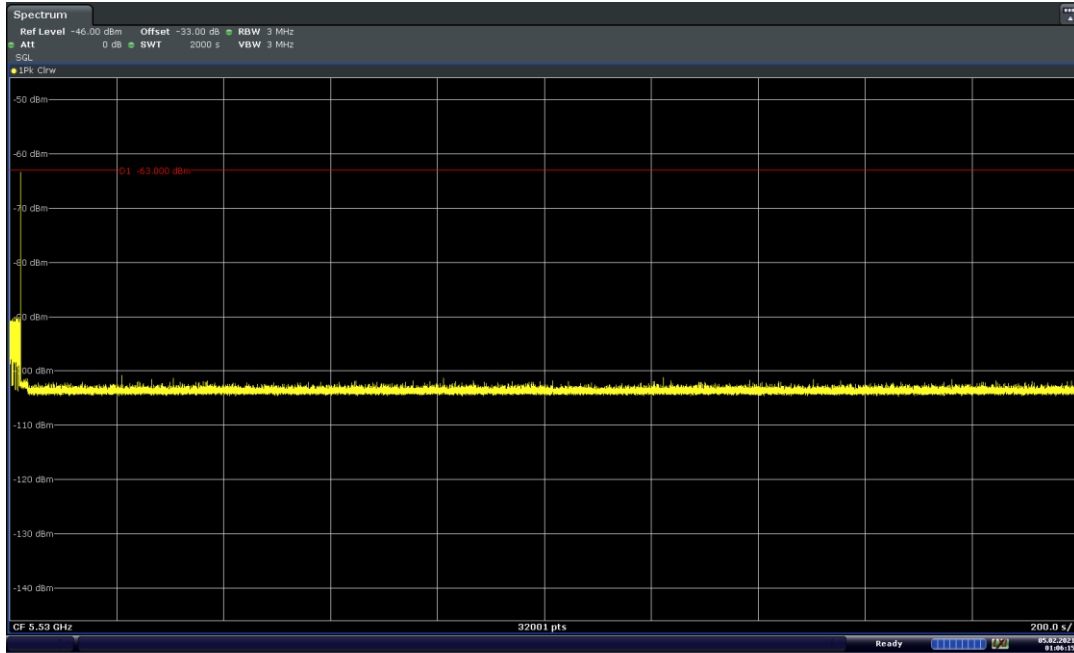

**Figure 9-45. 5530MHz - Non-Occupancy Period (30 Minutes) - Mode 3 (80MHz)**

|                                                  |                                                                                     |                                               |                                        |
|--------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BCGA2379<br><b>IC:</b> 579C-A2379 |  | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C2101020005-14.BCG   | <b>Test Dates:</b><br>02/05/2021-02/15/2021                                         |                                               | Page 51 of 54                          |

#### 9.4.4 Non-Occupancy Period (30 Minutes) Mode 4:

##### Notes:

1. No frequency transmission detected during the Non-Occupancy Period of 30 minutes monitoring.

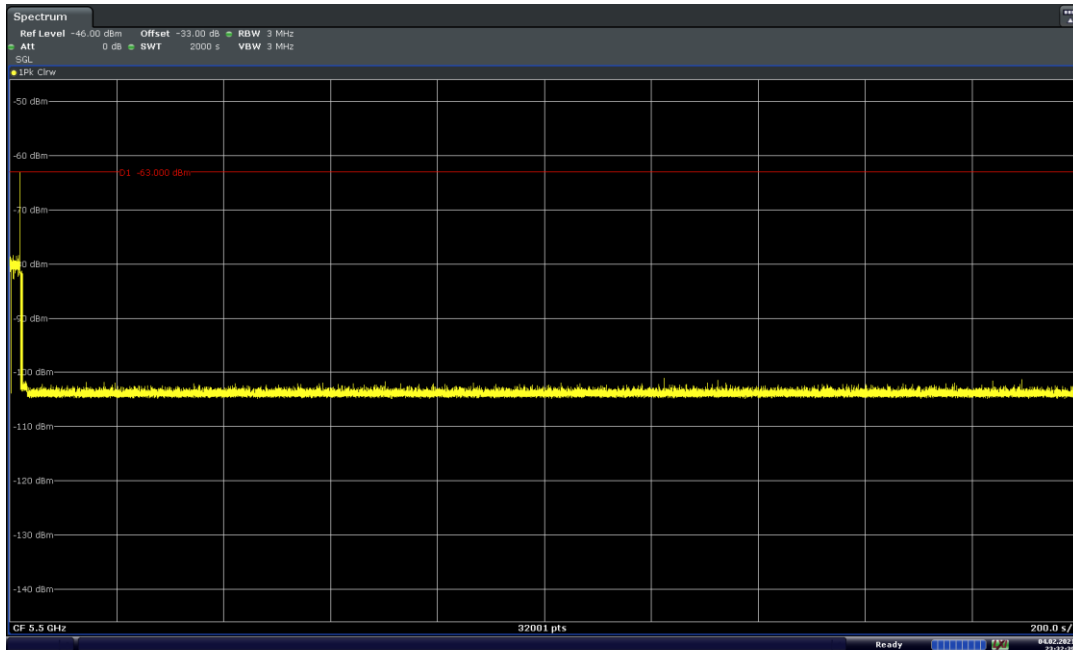


Figure 9-46. 5500MHz - Non-Occupancy Period (30 Minutes) - Mode 4 (20MHz)


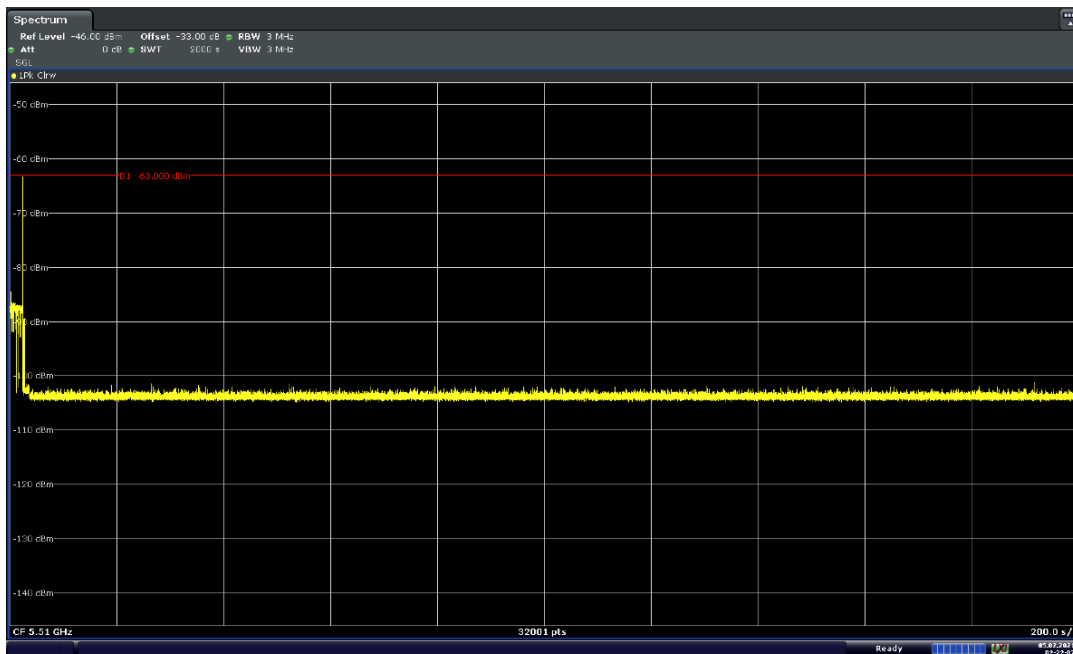


Figure 9-47. 5510MHz - Non-Occupancy Period (30 Minutes) - Mode 4 (40MHz)

|                                         |                                              |                                       |                                 |
|-----------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379      | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-14.BCG | Test Dates:<br>02/05/2021-02/15/2021         | EUT Type:<br>Tablet Device            | Page 52 of 54                   |

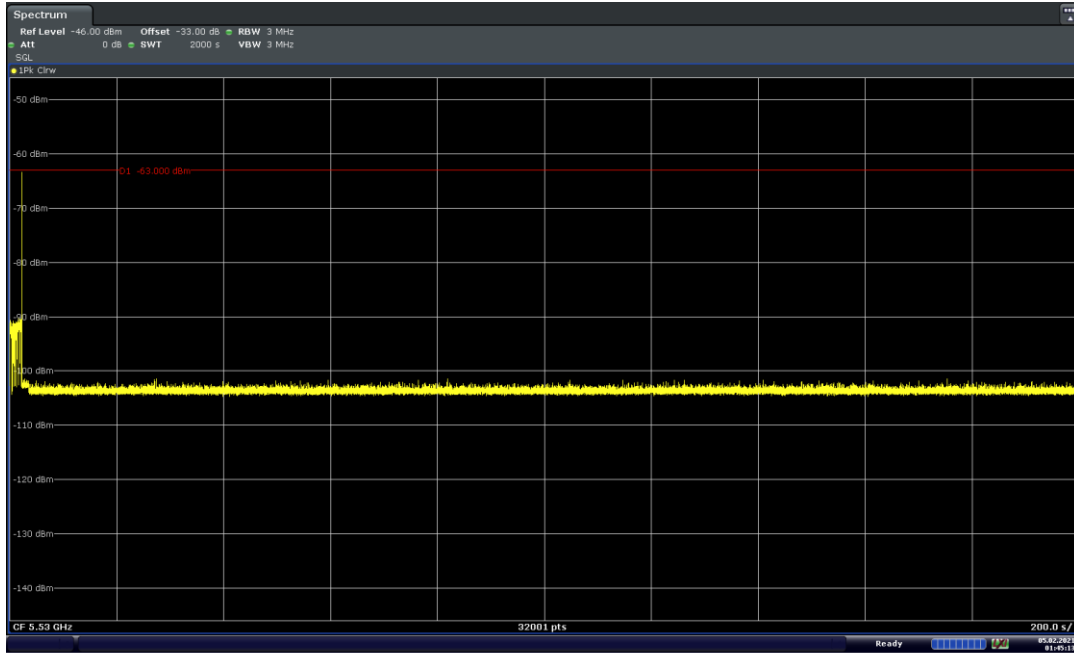

**Figure 9-48. 5530MHz - Non-Occupancy Period (30 Minutes) - Mode 4 (80MHz)**

|                                                  |                                                                                     |                                               |                                        |
|--------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BCGA2379<br><b>IC:</b> 579C-A2379 |  | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C2101020005-14.BCG   | <b>Test Dates:</b><br>02/05/2021-02/15/2021                                         |                                               | Page 53 of 54                          |

## 10.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA2379, IC: 579C-A2379** is in compliance with the DFS requirements for a Client Device without radar detection in accordance with Part 15.407 of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

|                                                  |                                                                                                                                                                                                                      |                                               |                                        |
|--------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BCGA2379<br><b>IC:</b> 579C-A2379 |  <b>PCTEST</b><br>Proud to be part of  element | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C2101020005-14.BCG   | <b>Test Dates:</b><br>02/05/2021-02/15/2021                                                                                                                                                                          | <b>EUT Type:</b><br>Tablet Device             | Page 54 of 54                          |