




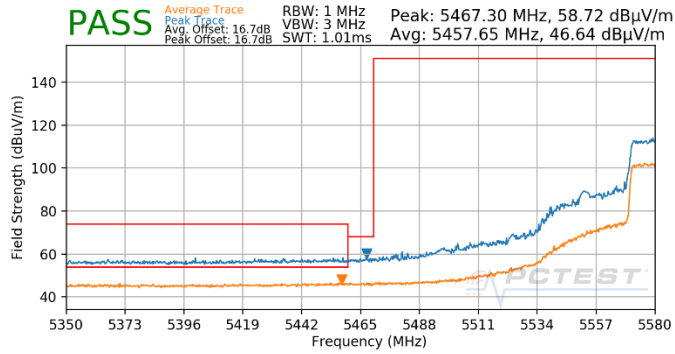


Plot 7-555. (FCC Only) CDD (Pk & Avg, RU484, Index 65, Ch.118, MCS11)

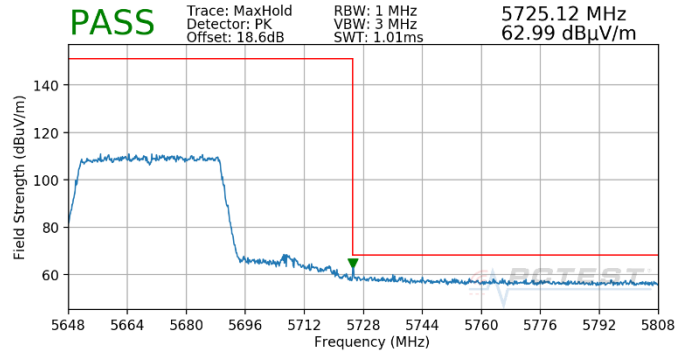


Plot 7-558. CDD (Pk, RU484, Index 65, Ch.134, MCS11)

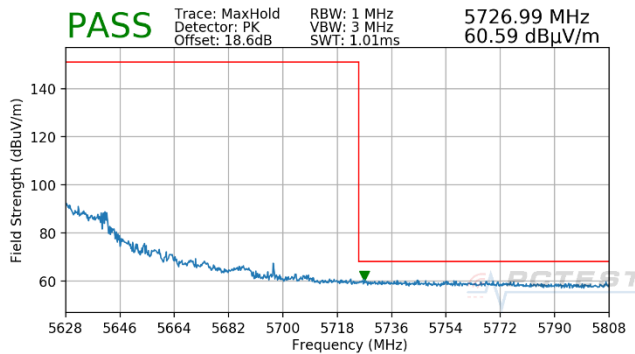


Plot 7-556. (FCC Only) CDD (Pk & Avg, RU484, Index 65, Ch.118, MCS11)

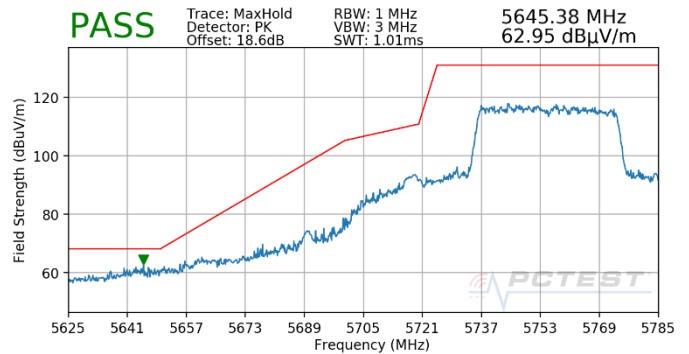

Plot 7-559. CDD (Pk, RU484, Index 65, Ch.151, MCS11)

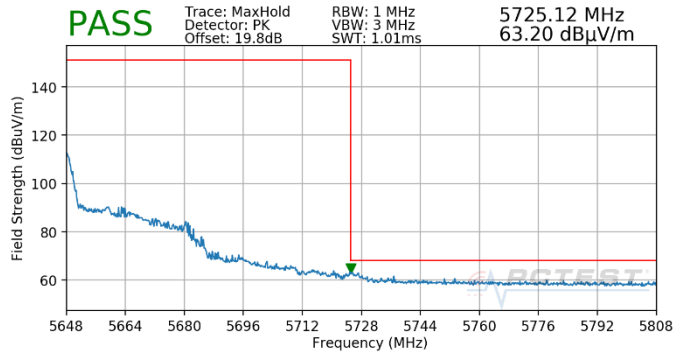

Plot 7-557. (FCC Only) CDD (Pk, RU484, Index 65, Ch.126, MCS11)

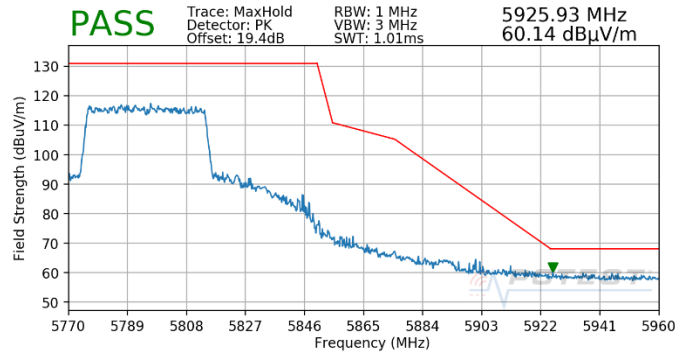


Plot 7-560. CDD (Pk, RU484, Index 65, Ch.159, MCS11)

|                                            |                                              |                                       |                                 |
|--------------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379         | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-16-R1.BCG | Test Dates:<br>12/12/2020 - 03/2/2021        | EUT Type:<br>Tablet Device            | Page 235 of 249                 |


## 7.6.14 CDD Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]


### RU26

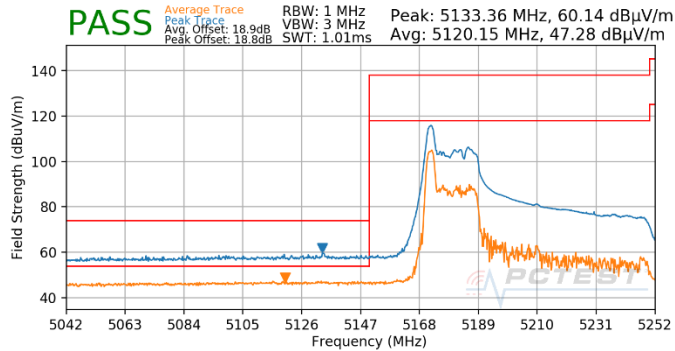


Plot 7-561. CDD (Pk & Avg, RU26, Index 0, Ch.42, MCS11)

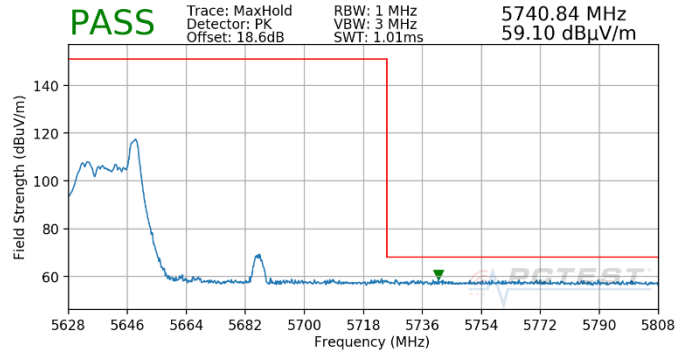


Plot 7-564. (FCC Only) CDD (Pk, RU26, Index 36, Ch.122, MCS11)

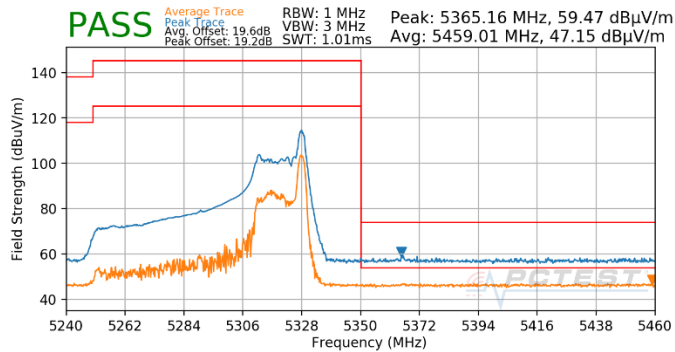


Plot 7-562. CDD (Pk & Avg, RU26, Index 36, Ch.58, MCS11)

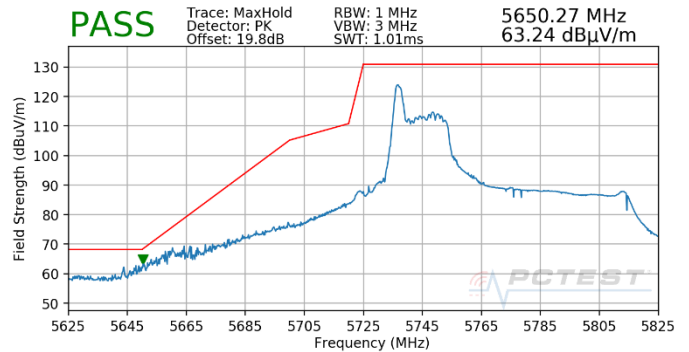

Plot 7-565. CDD (Pk, RU26, Index 0, Ch.155, MCS11)

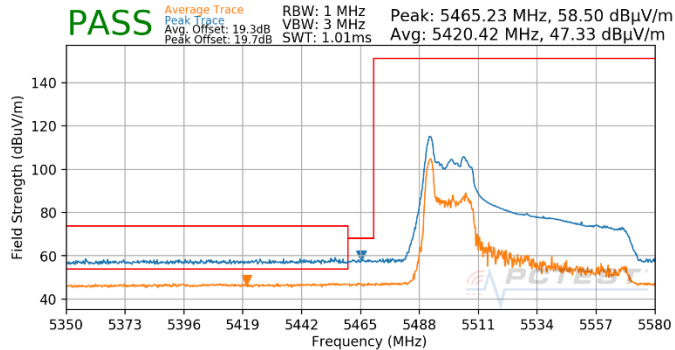


Plot 7-563. CDD (Pk & Avg, RU26, Index 0, Ch.106, MCS11)

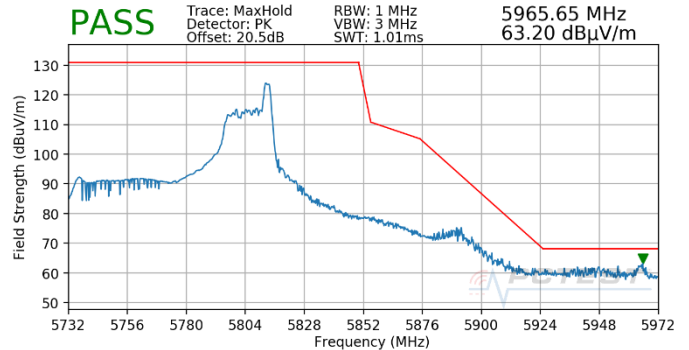


Plot 7-566. CDD (Pk, RU26, Index 36, Ch.155, MCS11)

|                                            |                                              |                                       |                                 |
|--------------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379         | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-16-R1.BCG | Test Dates:<br>12/12/2020 - 03/2/2021        | EUT Type:<br>Tablet Device            | Page 236 of 249                 |


## RU996

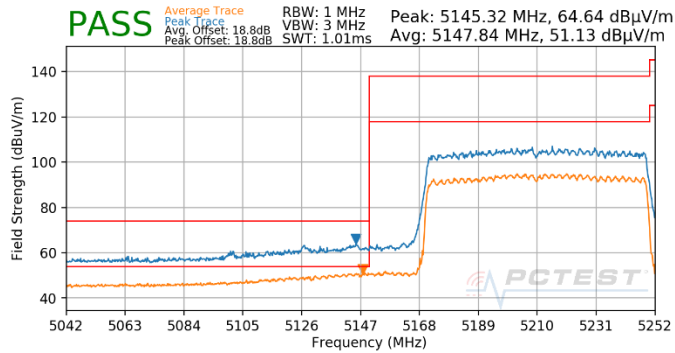


Plot 7-567. CDD (Pk & Avg, RU996, Index 67, Ch.42, MCS11)

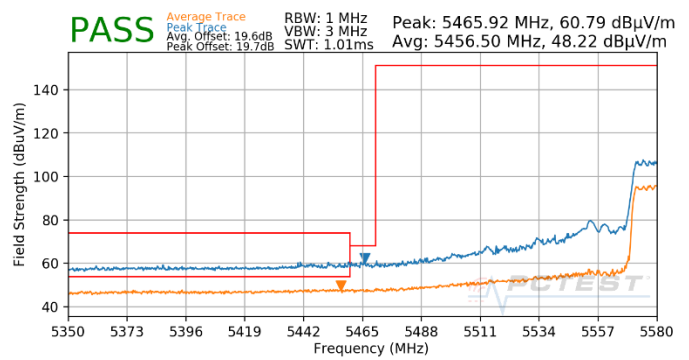


Plot 7-570. (FCC Only) CDD (Pk & Avg, RU996, Index 67, Ch.122, MCS11)

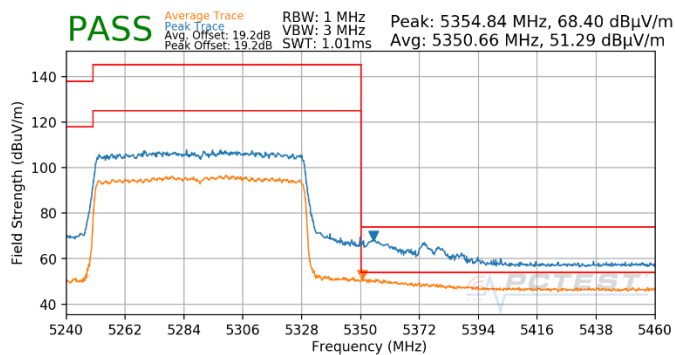


Plot 7-568. CDD (Pk & Avg, RU996, Index 67, Ch.58, MCS11)

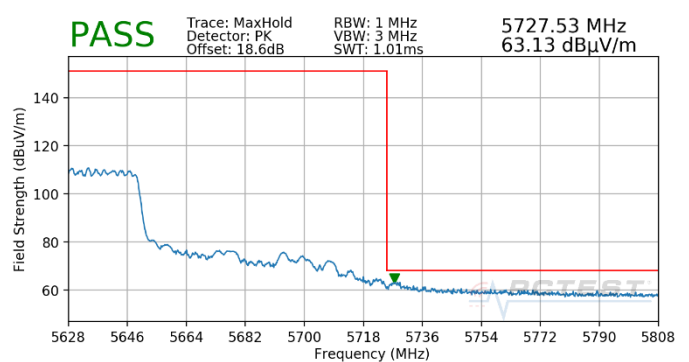

Plot 7-571. (FCC Only) CDD (Pk, RU996, Index 67, Ch.122, MCS11)

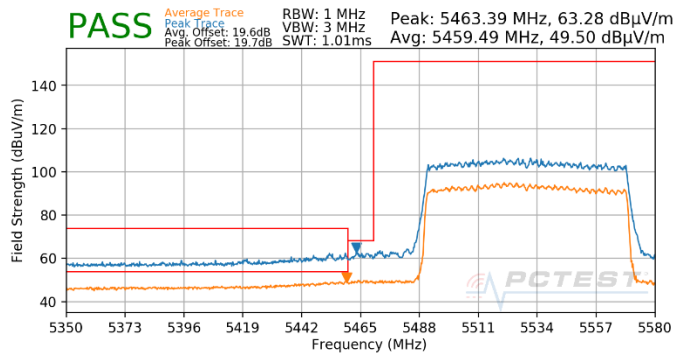


Plot 7-569. CDD (Pk & Avg, RU996, Index 67, Ch.106, MCS11)

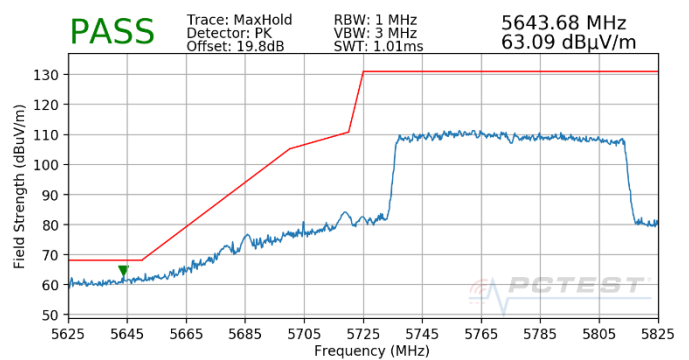

Plot 7-572. CDD (Pk, RU996, Index 67, Ch.155, MCS11)

|                                            |                                              |                                       |                                 |
|--------------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379         | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-16-R1.BCG | Test Dates:<br>12/12/2020 - 03/2/2021        | EUT Type:<br>Tablet Device            | Page 237 of 249                 |

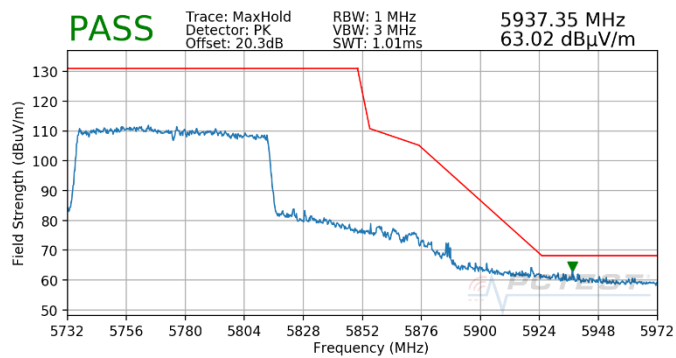

Plot 7-573. CDD (Pk, RU996, Index 67, Ch.155, MCS11)

|                                            |                                                                                     |                                       |                                 |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-16-R1.BCG | Test Dates:<br>12/12/2020 - 03/2/2021                                               | EUT Type:<br>Tablet Device            | Page 238 of 249                 |

## 7.7 Radiated Spurious Emissions – Below 1GHz

**§15.209; RSS-Gen [8.9]**

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-158 per Section 15.209 and RSS-Gen (8.9).***

| Frequency         | Field Strength<br>[μV/m] | Measured Distance<br>[Meters] |
|-------------------|--------------------------|-------------------------------|
| 0.009 – 0.490 MHz | 2400/F (kHz)             | 300                           |
| 0.490 – 1.705 MHz | 24000/F (kHz)            | 30                            |
| 1.705 – 30.00 MHz | 30                       | 30                            |
| 30.00 – 88.00 MHz | 100                      | 3                             |
| 88.00 – 216.0 MHz | 150                      | 3                             |
| 216.0 – 960.0 MHz | 200                      | 3                             |
| Above 960.0 MHz   | 500                      | 3                             |

**Table 7-158. Radiated Limits**

### Test Procedures Used

ANSI C63.10-2013

### Test Settings

#### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


#### Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


|                                            |                                                                                     |                                       |                                 |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-16-R1.BCG | Test Dates:<br>12/12/2020 - 03/2/2021                                               | EUT Type:<br>Tablet Device            | Page 239 of 249                 |

## Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

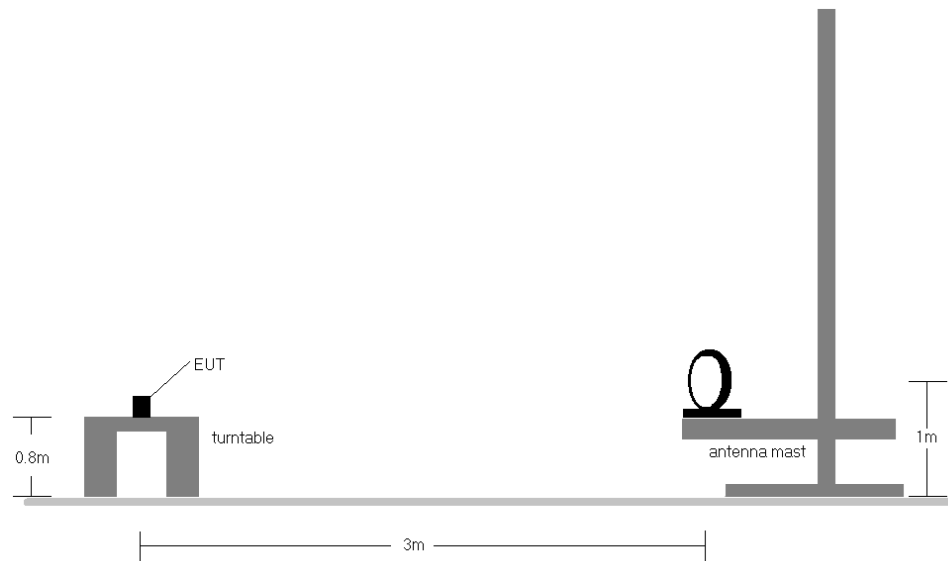

**Figure 7-6. Radiated Test Setup < 30MHz**

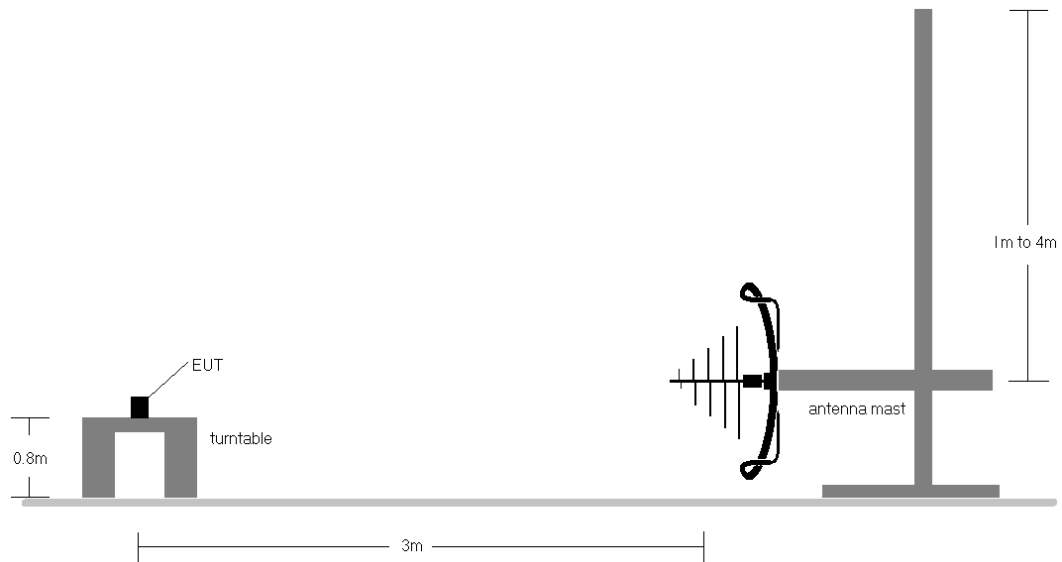

**Figure 7-7. Radiated Test Setup < 1GHz**

|                                            |                                                                                                                                                                                                              |                                       |                                 |
|--------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379         |  <b>PCTEST</b><br>Proud to be part of  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-16-R1.BCG | Test Dates:<br>12/12/2020 - 03/2/2021                                                                                                                                                                        | EUT Type:<br>Tablet Device            | Page 240 of 249                 |

## Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-158.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. Both configurations below were investigated, and the worst case has been reported.
  - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
  - b. EUT powered by host PC via USB-C cable with wire charger
9. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
10. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.
11. All antenna configurations and data rates were investigated and only the worst case are reported.

## Sample Calculations


### Determining Spurious Emissions Levels

- Field Strength Level [dB $\mu$ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] – Preamplifier Gain [dB]
- Margin [dB] = Field Strength Level [dB $\mu$ V/m] – Limit [dB $\mu$ V/m]

|                                            |                                                                                                                                                                                                                      |                                       |                                 |
|--------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379         |  <b>PCTEST</b><br>Proud to be part of  element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-16-R1.BCG | Test Dates:<br>12/12/2020 - 03/2/2021                                                                                                                                                                                | EUT Type:<br>Tablet Device            | Page 241 of 249                 |

## CDD Radiated Spurious Emissions (Below 1GHz)


§15.209; RSS-Gen [8.9]

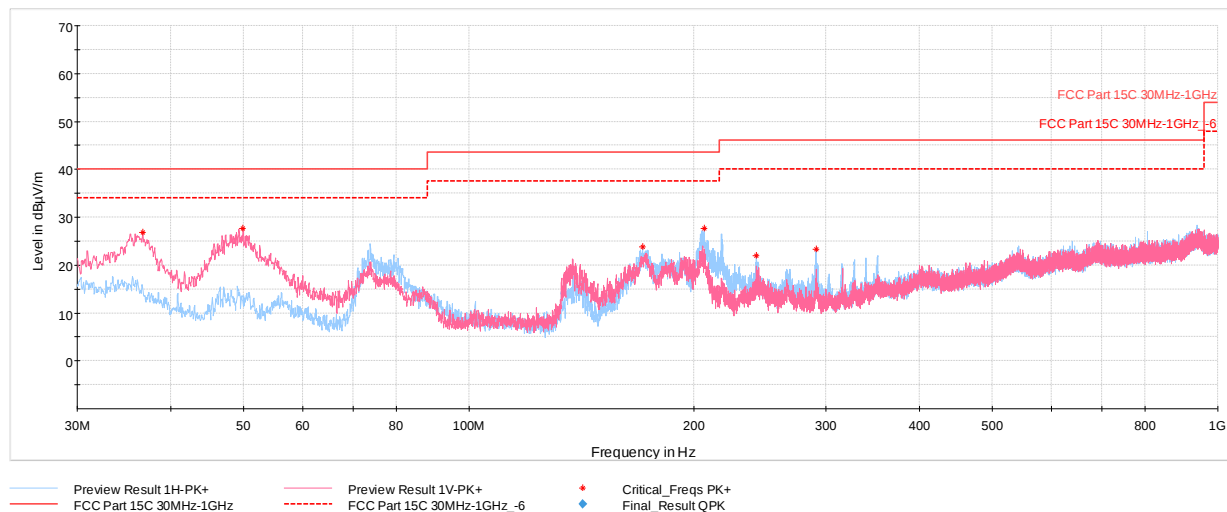

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 36.69           | Peak     | V               | 100                 | 0                          | -65.02               | -15.22      | 26.76                   | 40.00          | -13.24      |
| 49.93           | Peak     | V               | 100                 | 0                          | -58.25               | -21.06      | 27.69                   | 40.00          | -12.31      |
| 170.55          | Peak     | H               | 100                 | 273                        | -65.83               | -17.42      | 23.75                   | 43.52          | -19.77      |
| 206.10          | Peak     | H               | 100                 | 333                        | -62.71               | -16.57      | 27.72                   | 43.52          | -15.80      |
| 242.24          | Peak     | H               | 100                 | 341                        | -70.06               | -14.96      | 21.98                   | 46.02          | -24.04      |
| 290.69          | Peak     | H               | 100                 | 0                          | -68.77               | -14.86      | 23.37                   | 46.02          | -22.65      |

Table 7-159. RSE below 1GHz CDD (RU26 – Ch.40), with AC/DC Adapter

|                                            |                                              |                                       |                                 |
|--------------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379         | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-16-R1.BCG | Test Dates:<br>12/12/2020 - 03/2/2021        | EUT Type:<br>Tablet Device            | Page 242 of 249                 |

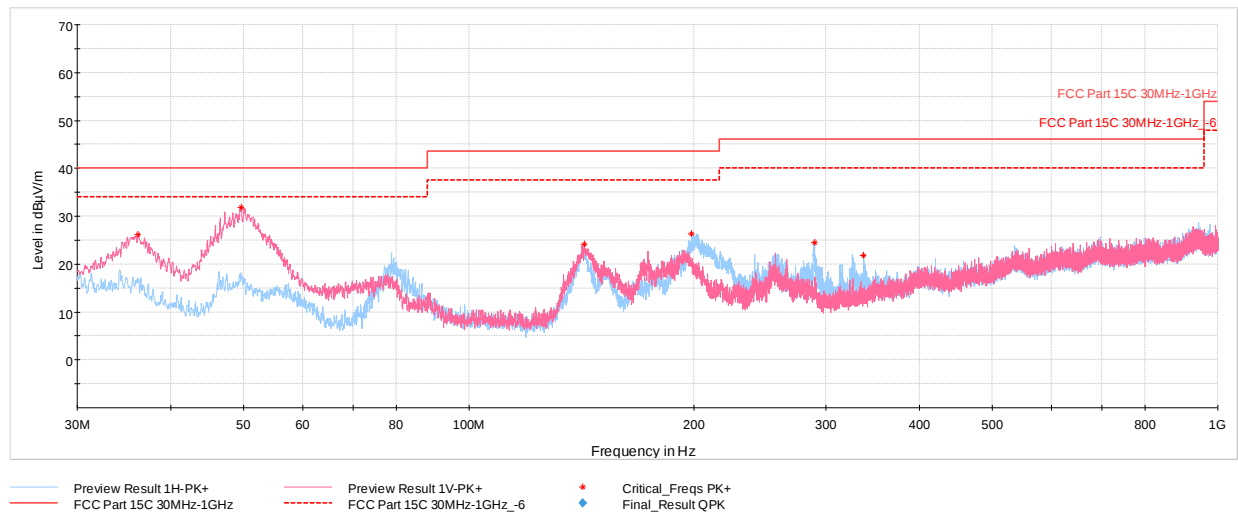

**Plot 7-575. RSE below 1GHz CDD (RU242 – Ch.40), with AC/DC Adapter**

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 36.16           | Peak     | V               | 100                 | 337                        | -65.99               | -14.89      | 26.12                   | 40.00          | -13.88      |
| 49.64           | Peak     | V               | 100                 | 43                         | -54.17               | -21.00      | 31.83                   | 40.00          | -8.17       |
| 142.67          | Peak     | V               | 100                 | 43                         | -64.14               | -18.79      | 24.07                   | 43.52          | -19.45      |
| 198.44          | Peak     | H               | 100                 | 165                        | -63.34               | -17.26      | 26.40                   | 43.52          | -17.12      |
| 289.28          | Peak     | H               | 100                 | 273                        | -67.50               | -14.94      | 24.56                   | 46.02          | -21.46      |
| 336.76          | Peak     | H               | 100                 | 284                        | -72.35               | -12.92      | 21.73                   | 46.02          | -24.29      |

**Table 7-160. RSE below 1GHz CDD (RU242– Ch.40), with AC/DC Adapter**


|                                            |                                                                                     |                                       |                                 |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-16-R1.BCG | Test Dates:<br>12/12/2020 - 03/2/2021                                               | EUT Type:<br>Tablet Device            | Page 243 of 249                 |

## Simultaneous TX Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

| Description               | LTE (Band 41)  | 802.11a/n/ac/ax 5GHz |
|---------------------------|----------------|----------------------|
| Antenna                   | Antenna 4b     | Antenna 4b           |
| Channel                   | 41490          | 36                   |
| Operating Frequency (MHz) | 2680           | 5180                 |
| Mode/Modulation           | QPSK/1RB/20MHz | 802.11ax/RU26/MCS11  |

**Table 7-161. Worst Case Simultaneous Transmission Configuration**

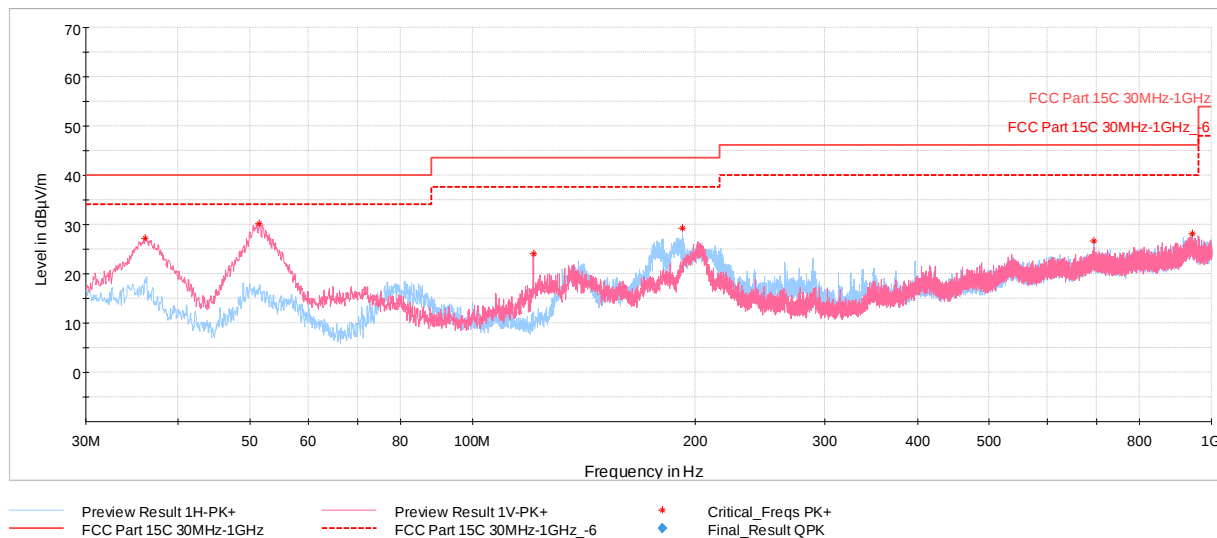

**Plot 7-576. Radiated Spurious Emissions – Simultaneous Transmission 30MHz – 1GHz, with AC/DC Adapter)**

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 36.06           | Peak     | V               | 100                 | 0                          | -64.90               | -14.83      | 27.27                   | 40.00          | -12.73      |
| 51.53           | Peak     | V               | 100                 | 6                          | -55.74               | -21.12      | 30.14                   | 40.00          | -9.86       |
| 120.94          | Peak     | V               | 100                 | 349                        | -63.49               | -19.45      | 24.06                   | 43.52          | -19.46      |
| 192.38          | Peak     | H               | 100                 | 243                        | -60.04               | -17.72      | 29.24                   | 43.52          | -14.28      |
| 692.61          | Peak     | H               | 100                 | 8                          | -77.64               | -2.66       | 26.70                   | 46.02          | -19.32      |
| 942.14          | Peak     | V               | 250                 | 174                        | -79.00               | 0.21        | 28.21                   | 46.02          | -17.81      |

**Table 7-162. Radiated Spurious Emissions – Simultaneous Transmission 30MHz – 1GHz, with AC/DC Adapter)**

|                                            |                                              |                                       |                                 |
|--------------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379         | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-16-R1.BCG | Test Dates:<br>12/12/2020 - 03/2/2021        | EUT Type:<br>Tablet Device            | Page 244 of 249                 |

## 7.8 AC Line Conducted Emission Measurement

### §15.207; RSS-Gen [8.8]

#### Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. All data rates and modes were investigated for AC Line conducted spurious emissions.

**All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).**

| Frequency of emission (MHz) | Conducted Limit (dBμV) |           |
|-----------------------------|------------------------|-----------|
|                             | Quasi-peak             | Average   |
| 0.15 – 0.5                  | 66 to 56*              | 56 to 46* |
| 0.5 – 5                     | 56                     | 46        |
| 5 – 30                      | 60                     | 50        |

**Table 7-163. Conducted Limits**

\*Decreases with the logarithm of the frequency.

#### Test Procedures Used

ANSI C63.10-2013, Section 6.2

#### Test Settings

##### Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


##### Average Measurements

7. Analyzer center frequency was set to the frequency of the spurious emission of interest
8. RBW = 9kHz (for emissions from 150kHz – 30MHz)
9. Detector = RMS
10. Sweep time = auto couple
11. Trace mode = max hold
12. Trace was allowed to stabilize

|                                            |                                                                                     |                                       |                                 |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-16-R1.BCG | Test Dates:<br>12/12/2020 - 03/2/2021                                               | EUT Type:<br>Tablet Device            | Page 245 of 249                 |

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

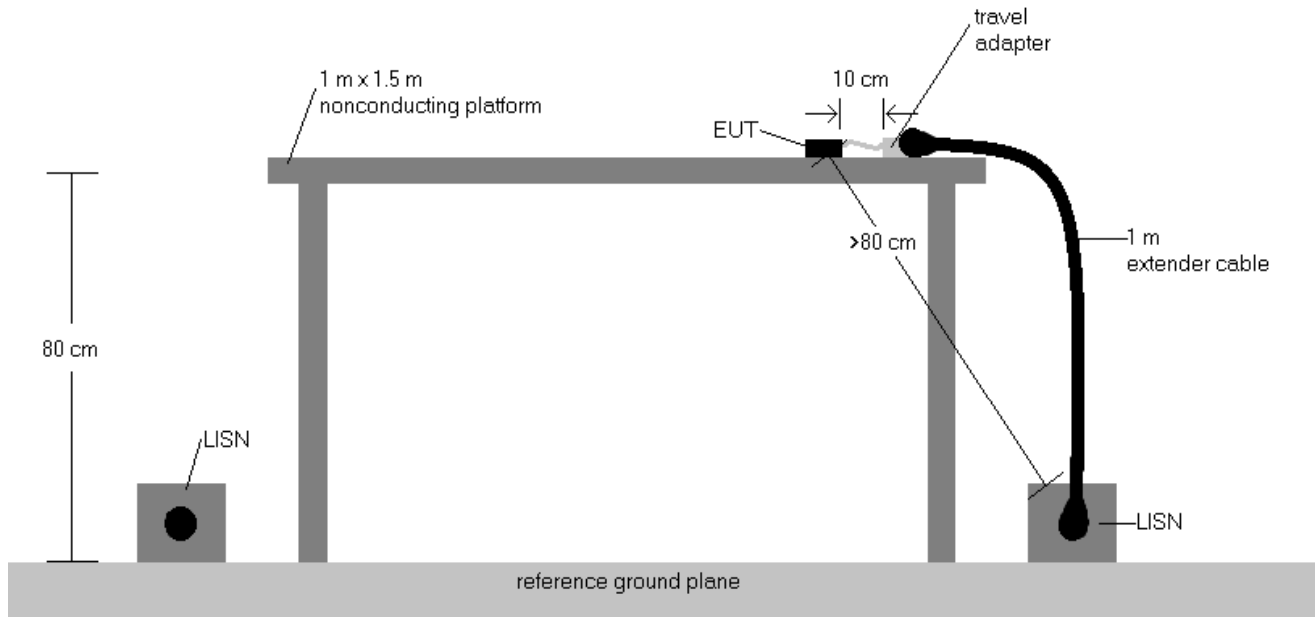


**Figure 7-8. Test Instrument & Measurement Setup**

## Test Notes

- All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
- Both configurations below were investigated, and the worst case has been reported.
  - EUT powered by AC/DC adaptor via USB-C cable with wire charger
  - EUT powered by host PC via USB-C cable with wire charger
- The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
- $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
- $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
- $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
- Traces shown in plots are made using quasi-peak and average detectors.
- Deviations to the Specifications: None.

|                                            |                                                                                                                                                                                                              |                                       |                                 |
|--------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379         |  <b>PCTEST</b><br>Proud to be part of  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-16-R1.BCG | Test Dates:<br>12/12/2020 - 03/2/2021                                                                                                                                                                        | EUT Type:<br>Tablet Device            | Page 246 of 249                 |

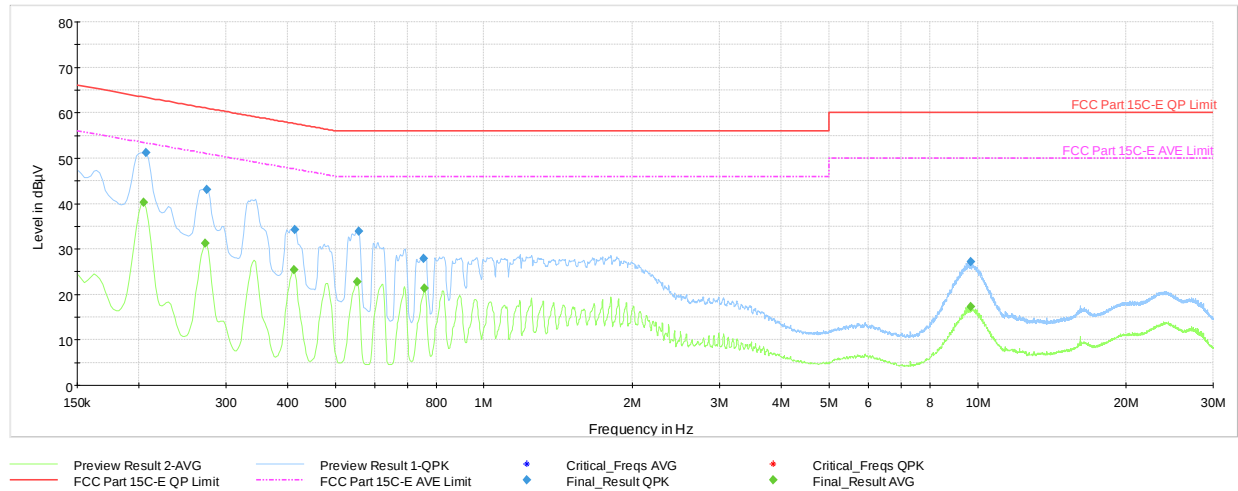


**Plot 7-577. AC Line Conducted Plot with 11ax UNII Band 1 – RU26 – Ch.40 (L1) with Laptop**

| Frequency [MHz] | Process State | QuasiPeak [dBμV] | Average [dBμV] | Limit [dBμV] | Margin [dB] | Line | PE  |
|-----------------|---------------|------------------|----------------|--------------|-------------|------|-----|
| 0.205           | FINAL         | —                | 40.30          | 53.42        | -13.11      | L1   | GND |
| 0.207           | FINAL         | 51.2             | —              | 63.33        | -12.11      | L1   | GND |
| 0.272           | FINAL         | —                | 31.18          | 51.05        | -19.87      | L1   | GND |
| 0.275           | FINAL         | 43.0             | —              | 60.98        | -17.95      | L1   | GND |
| 0.412           | FINAL         | —                | 25.51          | 47.61        | -22.10      | L1   | GND |
| 0.414           | FINAL         | 34.2             | —              | 57.57        | -23.34      | L1   | GND |
| 0.554           | FINAL         | —                | 22.72          | 46.00        | -23.28      | L1   | GND |
| 0.558           | FINAL         | 34.0             | —              | 56.00        | -22.02      | L1   | GND |
| 0.754           | FINAL         | 27.9             | —              | 56.00        | -28.10      | L1   | GND |
| 0.758           | FINAL         | —                | 21.34          | 46.00        | -24.66      | L1   | GND |
| 9.686           | FINAL         | —                | 17.29          | 50.00        | -32.71      | L1   | GND |
| 9.686           | FINAL         | 27.2             | —              | 60.00        | -32.85      | L1   | GND |

**Table 7-164. AC Line Conducted with 11ax UNII Band 1 – RU26 – Ch.40 (L1) with Laptop**

|                                            |                                              |                                       |                                 |
|--------------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379         | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-16-R1.BCG | Test Dates:<br>12/12/2020 - 03/2/2021        | EUT Type:<br>Tablet Device            | Page 247 of 249                 |

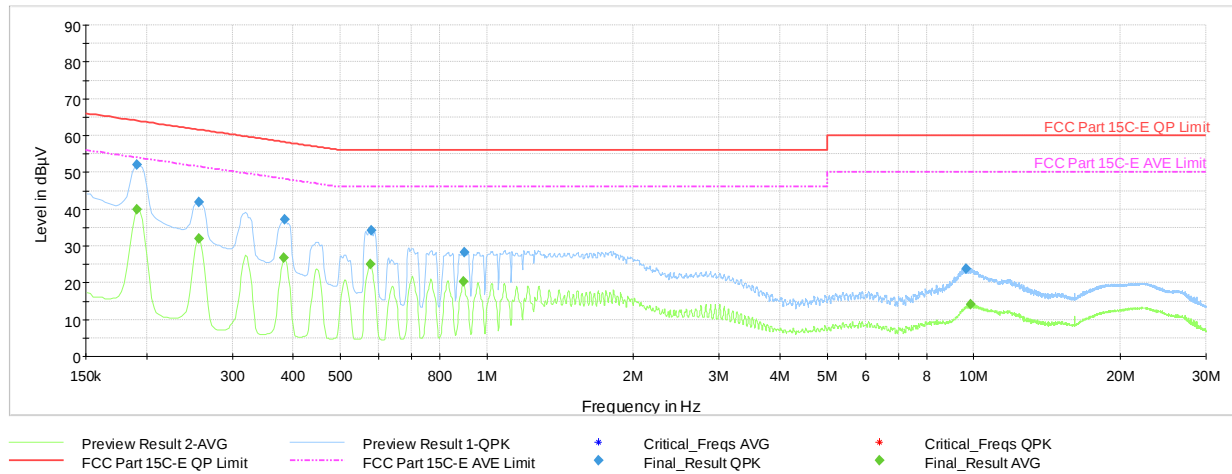

**Plot 7-578. AC Line Conducted Plot with 11ax UNII Band 1 – RU26 – Ch.40 (N) with Laptop**

| Frequency [MHz] | Process State | QuasiPeak [dBμV] | Average [dBμV] | Limit [dBμV] | Margin [dB] | Line | PE  |
|-----------------|---------------|------------------|----------------|--------------|-------------|------|-----|
| 0.191           | FINAL         | —                | 39.99          | 53.98        | -13.99      | N    | GND |
| 0.191           | FINAL         | 52.0             | —              | 63.98        | -11.98      | N    | GND |
| 0.257           | FINAL         | —                | 31.97          | 51.54        | -19.57      | N    | GND |
| 0.257           | FINAL         | 41.9             | —              | 61.54        | -19.66      | N    | GND |
| 0.383           | FINAL         | —                | 26.66          | 48.23        | -21.57      | N    | GND |
| 0.385           | FINAL         | 37.1             | —              | 58.18        | -21.09      | N    | GND |
| 0.576           | FINAL         | —                | 25.12          | 46.00        | -20.88      | N    | GND |
| 0.578           | FINAL         | 34.2             | —              | 56.00        | -21.83      | N    | GND |
| 0.896           | FINAL         | —                | 20.44          | 46.00        | -25.56      | N    | GND |
| 0.898           | FINAL         | 28.3             | —              | 56.00        | -27.72      | N    | GND |
| 9.630           | FINAL         | 23.8             | —              | 60.00        | -36.18      | N    | GND |
| 9.875           | FINAL         | —                | 14.02          | 50.00        | -35.98      | N    | GND |

**Table 7-165. AC Line Conducted with 11ax UNII Band 1 – RU26 – Ch.40 (N) with Laptop**

|                                            |                                              |                                       |                                 |
|--------------------------------------------|----------------------------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2379<br>IC: 579C-A2379         | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C2101020005-16-R1.BCG | Test Dates:<br>12/12/2020 - 03/2/2021        | EUT Type:<br>Tablet Device            | Page 248 of 249                 |

## 8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA2379** and **IC: 579C-A2379** is in compliance with is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

|                                                   |                                                                                                                                                                                                              |                                               |                                        |
|---------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BCGA2379<br><b>IC:</b> 579C-A2379  |  <b>PCTEST</b><br>Proud to be part of  | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1C2101020005-16-R1.BCG | <b>Test Dates:</b><br>12/12/2020 - 03/2/2021                                                                                                                                                                 | <b>EUT Type:</b><br>Tablet Device             | Page 249 of 249                        |