



## DATA REFERENCE REPORT FCC PART 15.247 / ISED RSS-247 WLAN OFDMA

**Applicant Name:**

Apple Inc.  
One Apple Park Way  
Cupertino, CA 95014  
United States

**Date of Testing:**

12/15/2020-3/18/2021

**Test Site/Location:**

PCTEST Lab. Morgan Hill, CA, USA

**Test Report Serial No.:**

1C2101020006-11.BCG

<b>FCC ID:</b>	<b>BCGA2461</b>
<b>IC:</b>	<b>579C-A2461</b>
<b>APPLICANT:</b>	<b>Apple Inc.</b>

**Application Type:** Certification  
**Reference Model/HVIN:** A2379  
**Variant Model/HVIN:** A2461, A2462  
**EUT Type:** Tablet Device  
**Frequency Range:** 2412 – 2467MHz  
**Modulation Type:** OFDMA  
**FCC Classification:** Digital Transmission System (DTS)  
**FCC Rule Part(s):** Part 15 Subpart C (15.247)  
**ISED Specification:** RSS-247 Issue 2  
**Test Procedure(s):** ANSI C63.10-2013, KDB 558074 D01 v05r02,  
KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 558074 D01 v05r02. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez  
President



CERT #2041.02

<b>FCC ID:</b> BCGA2461 <b>IC:</b> 579C-A2461	<b>PCTEST<sup>®</sup></b> Proud to be part of element	<b>DATA REFERENCE REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1C2101020006-11.BCG	<b>Test Dates:</b> 12/15/2020-3/18/2021	<b>EUT Type:</b> Tablet Device	Page 1 of 48

## T A B L E   O F   C O N T E N T S

---

1.0	INTRODUCTION .....	3
1.1	Scope .....	3
1.2	PCTEST Test Location.....	3
1.3	Test Facility / Accreditations .....	3
2.0	PRODUCT INFORMATION.....	4
2.1	Equipment Description .....	4
2.2	Device Capabilities .....	4
2.3	Antenna Description .....	6
2.4	Test Support Equipment.....	6
2.5	Test Configuration .....	7
2.6	Software and Firmware .....	7
2.7	EMI Suppression Device(s)/Modifications .....	7
3.0	DESCRIPTION OF TESTS .....	8
3.1	Evaluation Procedure .....	8
3.2	Radiated Emissions.....	8
3.3	Environmental Conditions.....	9
4.0	ANTENNA REQUIREMENTS .....	10
5.0	MEASUREMENT UNCERTAINTY .....	11
6.0	TEST EQUIPMENT CALIBRATION DATA .....	12
7.0	TEST RESULTS (SPOT-CHECK DATA) .....	13
7.1	Summary .....	13
7.2	Radiated Spurious Emissions.....	14
8.0	TEST RESULTS (ANTENNA 4a) .....	15
8.1	Summary .....	15
8.2	Radiated Spurious Emissions – Above 1GHz .....	16
8.2.1	Antenna 4a Radiated Spurious Emission Measurements.....	19
8.2.2	CDD Radiated Spurious Emission Measurements .....	25
8.2.3	Antenna 4a Radiated Restricted Band Edge Measurements .....	31
8.2.4	CDD Radiated Restricted Band Edge Measurements .....	39
9.0	CONCLUSION.....	47
10.0	APPENDIX A: REFERENCE MODEL TEST REPORT.....	48

FCC ID: BCGA2461 IC: 579C-A2461	<b>PCTEST<sup>®</sup></b> Proud to be part of element		DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device		Page 2 of 48

## 1.0 INTRODUCTION

### 1.1 Scope

Per manufacturer declaration, there are two tablet device models, A2379 and A2461(A2462), with high degree of similarity, reference model FCC ID: BCGA2379 / IC: 579C-A2379 and variant model **FCC ID: BCGA2461 / IC: 579C-A2461**. The reference model supports mmWave operations, while the variant model has the mmWave components/antennas removed. Both models share the same material, form factor, circuit design, and components, including antennas and their locations. The reference and variant models use the same power tables and have same tune-up tolerances.

Per FCC/ISED approved Data Referencing Test Plan, testing was done fully on the reference model FCC ID: BCGA2379 / IC: 579C-A2379, while radiated spot-check verification has been performed on variant model **FCC ID: BCGA2461 / IC: 579C-A2461**. Additionally, due to Antenna 4a location being close to the depopulated mmWave components, full radiated testing has been done for all supported technologies on Antenna 4a. Spot-check measurements were conducted, all measurements were investigated and found to be within acceptable tolerance.

Equipment Class	Reference Model FCC ID & IC	Reference Report	Report Title
DTS	BCGA2379 579C-A2379	1C2101020005-10-R1.BCG	RF WLAN (OFDMA) Test Report

**Table 1-1. Reference Model Details**

Reference model FCC ID: BCGA2379 / IC: 579C-A2379 test report has been included in Appendix A.

### 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

### 1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Morgan Hill, CA 95037, U.S.A.

- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: BCGA2461 IC: 579C-A2461	PCTEST <sup>®</sup> Proud to be part of element		DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device		Page 3 of 48

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA2461 / IC: 579C-A2461**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN 802.11ax – RU (DTS) transmitter.

**Test Device Serial No.:** JP76RWY2XR, XW3JN32D9W

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (FR1), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8), WPT

This device supports BT Beamforming

Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13*	2472
7	2442		

**Table 2-1. 802.11b/g/n/ax Frequency/ Channel Operations**

\*Channel 13 is disabled for DTS 802.11ax HE20.

**Note:** The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of KDB 558074 D01 v05r02 and ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Measured Duty Cycles				
802.11 Mode/Band		Duty Cycle [%]		
		Antenna 4a	Antenna 2a	CDD
2.4GHz	ax - RU	98.9	99.1	98.5

**Table 2-2. Measured Duty Cycles**

FCC ID: BCGA2461 IC: 579C-A2461	PCTEST <sup>®</sup> Proud to be part of element			DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device			

The device employs CDD technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM		CDD	
		Antenna 4a	Antenna 2a	Antenna 4a	Antenna 2a	Antenna 4a	Antenna 2a
2.4GHz	11ax	✓	✓	✓	✓	✓	✓

**Table 2-3. WiFi Configurations**

✓ = Support ; ✗ = NOT Support

**SISO** = Single Input Single Output

**SDM** = Spatial Diversity Multiplexing – CDD function

**CDD** = Cyclic Delay Diversity - 2Tx Function

8/8.6, 16/17.2, 24/25.8, 33/34.4, 49/51.6, 65/68.8, 73/77.4, 81/86.0, 98/103.2,

108/114.7, 122/129.0, 135/143.4 (ax – 20MHz)

**Data Rate(s) Supported:** 16/17.2, 32/34.4, 48/51.6, 66/68.8, 98/103.2, 130/137.6, 146/154.8, 162/172, 196/206.4, 216/229.4 (CDD ax – 20MHz)

This device supports simultaneous transmission operations, which allows for multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

Antenna	Simultaneous Tx Config	WLAN	Bluetooth	GSM / WCDMA	LTE / FR1 NR			UNII
		802.11 b/g/n/ax	BDR, EDR, HDR4/8, LE1M/2M	Mid Band	Mid Band	High Band	Ultra High Band	802.11 a/n/ac/ax
2a	Config 1	✓	✗	✗	✗	✗	✓	✗
2a	Config 2	✗	✓	✗	✗	✗	✓	✗
4a	Config 3	✓	✗	✗	✗	✗	✓	✗
4a	Config 4	✗	✓	✗	✗	✗	✓	✗
4b	Config 5	✗	✗	✓	✗	✗	✗	✓
4b	Config 6	✗	✗	✗	✓	✗	✗	✓
4b	Config 7	✗	✗	✗	✗	✓	✗	✓

**Table 2-4. Simultaneous Transmission Configurations**

✓ = Support; ✗ = Not Support

FCC ID: BCGA2461 IC: 579C-A2461	 <b>PCTEST®</b> Proud to be part of 	DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device	Page 5 of 48

## 2.3 Antenna Description

Following antenna gains provided by manufacturer were used for testing.

Frequency [GHz]	Antenna Gain (dBi)	
	Antenna 4a	Antenna 2a
2.4	2.0	3.0

Table 2-5. Highest Antenna Gain

## 2.4 Test Support Equipment

1	Apple MacBook Pro w/AC/DC Adapter	Model: A2141 Model: A2166	S/N: C02DV7VKMD6T S/N: N/A
2	Apple USB-C Cable	Model: Chimp	S/N: 420A57
3	USB-C Cable w/ AC Adapter	Model: A146 Model: A2305	S/N: N/A S/N: N/A
4	Apple Pencil	Model: N/A	S/N: GQXYGSXBJKM9
5	DC Power Supply	Model: KPS3010D	S/N: N/A

Table 2-6. Test Support Equipment List

FCC ID: BCGA2461 IC: 579C-A2461	 <b>PCTEST<sup>®</sup></b> DATA REFERENCE REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device	Page 6 of 48	

## 2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013 and KDB 558074 D01 v05r02. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions. See Sections 3.2 for radiated emissions test setups.

There are two vendors of the WLAN radio modules, variant 1 and variant 2. Both radio modules have the same mechanical outline, same on-board antenna matching circuit, identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. The worst case configuration was found between the two variants. The EUT was also investigated with and without charger.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

Per FCC/ISED Approved Data Referencing Test Plan, Antenna 4a radiated testing and spot-check measurements have been conducted and reported. WLAN (OFDMA) Spot-check Test Plan can be referred to below Table 2-7.

Technology	Test Case	FCC ID: BCGA2461 IC: 579C-A2461	
		Mode	Channel(s)
WLAN (802.11ax-RU)	Radiated Spurious Emissions	MIMO Max Power Only 2.4GHz 11ax 20MHz RU26	M

Table 2-7. FCC/ISED Approved Data Referencing Test Plan

Output powers were measured and confirmed to be consistent between Reference and Variant models prior to testing.

For 802.11b/g/n/ax-SU test results, see separate WLAN report, 1C2101020006-10.BCG

## 2.6 Software and Firmware

The test was conducted with firmware version 18E20700y installed on the EUT.

## 2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: BCGA2461 IC: 579C-A2461	PCTEST <sup>®</sup> Proud to be part of element		DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device		

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 558074 D01 v05r02 were used in the measurement of the EUT.

**Deviation from measurement procedure.....**None

### 3.2 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

FCC ID: BCGA2461 IC: 579C-A2461	PCTEST <sup>®</sup> Proud to be part of element		DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device		Page 8 of 48

### 3.3 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: BCGA2461 IC: 579C-A2461	 <b>PCTEST</b> <sup>®</sup> Proud to be part of  element		<b>DATA REFERENCE REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1C2101020006-11.BCG	<b>Test Dates:</b> 12/15/2020-3/18/2021	<b>EUT Type:</b> Tablet Device		Page 9 of 48

## 4.0 ANTENNA REQUIREMENTS

### Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna(s) of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

### Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: BCGA2461 IC: 579C-A2461	 <b>PCTEST</b> Proud to be part of 		DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device		Page 10 of 48

## 5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Radiated Disturbance (<30MHz)	4.06
Radiated Disturbance (30MHz - 1GHz)	4.30
Radiated Disturbance (1 - 18GHz)	4.78
Radiated Disturbance (>18GHz)	4.79

FCC ID: BCGA2461 IC: 579C-A2461	 PCTEST <sup>®</sup> Proud to be part of element	DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device	Page 11 of 48

## 6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	PXA Signal Analyzer (3Hz - 26.5 GHz)	7/24/2020	Annual	7/24/2021	MY49430244
Anritsu	ML2496A	Power Meter	4/9/2020	Annual	4/9/2021	2002005
Anritsu	MA2411B	Pulse Power Sensor	11/10/2020	Annual	11/10/2021	1726261
Anritsu	MA2411B	Pulse Power Sensor	12/9/2020	Annual	12/9/2021	1726262
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	8/11/2020	Annual	8/11/2021	T058701-01
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	12/3/2020	Annual	12/3/2021	102328
ETS-Lindgren	3142E	BiConiLog Antenna (30MHz - 6GHz)	9/15/2020	Annual	9/15/2021	208204
ETS-Lindgren	3117	Double Ridge Guide Antenna (1-18 GHz)	4/21/2020	Annual	4/21/2021	205956
Rohde & Schwarz	ESW26	EMI Test Receiver	6/1/2020	Annual	6/1/2021	101299
Rohde & Schwarz	ESW44	EMI Test Receiver	8/7/2020	Annual	8/7/2021	101668
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	4/3/2020	Annual	4/3/2021	100052
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Antenna (400MHz-18GHz)	10/2/2020	Annual	10/2/2021	101063
Rohde & Schwarz	HFH2-Z2	Loop Antenna	3/12/2020	Annual	3/12/2021	100546
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	12/3/2020	Annual	12/3/2021	101648
Rohde & Schwarz	ENV216	Two-Line V-Network (LISN)	12/7/2020	Annual	12/7/2021	101364

Table 6-1. Test Equipment List

**Note:**

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCGA2461 IC: 579C-A2461	PCTEST <sup>®</sup> Proud to be part of element			DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device			

## 7.0 TEST RESULTS (SPOT-CHECK DATA)

### 7.1 Summary

Company Name: Apple Inc.  
 FCC ID: BCGA2461  
 IC: 579C-A2461  
 FCC Classification: Digital Transmission System (DTS)

Technology	Test Configurations					Reference Model		Variant Model		Delta	
	Test Description	RU Size	RU Index	Channel	Measurement Frequency [MHz]	FCC ID: BCGA2379	IC: 579C-A2379	FCC ID: BCGA2461	IC: 579C-A2461		
						Peak [dB $\mu$ V/m]	Average [dB $\mu$ V/m]	Peak [dB $\mu$ V/m]	Average [dB $\mu$ V/m]	Peak [dB]	Average [dB]
WLAN 802.11ax-RU	Radiated Spurious Emissions	26	4	06	4874	47.44	36.28	48.85	37.51	1.41	1.23


Table 7-1. Worst Case Spot-check Result

Spot-checks were conducted, all measurements were investigated and found to be within acceptable tolerance in accordance with FCC/ISED Approved Data Referencing Test Plan.

FCC ID: BCGA2461 IC: 579C-A2461	PCTEST <sup>®</sup> Proud to be part of element			DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device			

## 7.2 Radiated Spurious Emissions

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

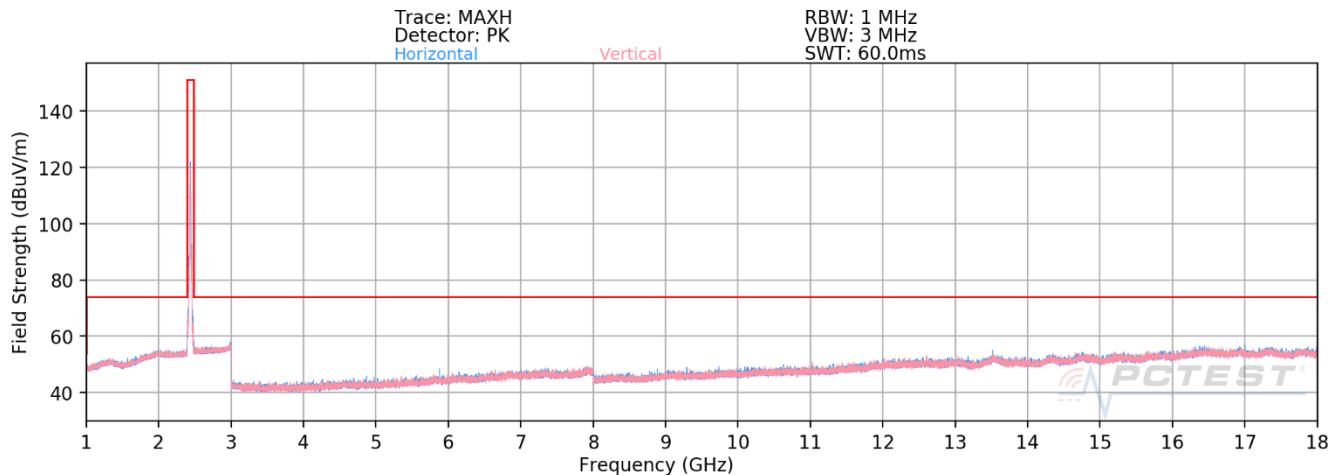


**Plot 7-1: Radiated Spurious Emissions above 1GHz CDD (802.11ax OFDMA – RU26 – Ch. 6)**

Worst Case Mode: 802.11ax-RU OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 4  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4874.00	Avg	-	117	343	-73.96	4.47	37.51	53.98	-16.47
4874.00	Peak	-	117	343	-62.62	4.47	48.85	73.98	-25.13
7311.00	Avg	-	-	-	-79.42	8.66	36.24	53.98	-17.74
7311.00	Peak	-	-	-	-67.49	8.66	48.17	73.98	-25.81
12185.00	Avg	-	-	-	-84.56	17.64	40.08	53.98	-13.90
12185.00	Peak	-	-	-	-73.00	17.64	51.64	73.98	-22.34

**Table 7-2: Radiated Measurements CDD (RU26)**

FCC ID: BCGA2461 IC: 579C-A2461	 <b>PCTEST®</b> Proud to be part of  DATA REFERENCE REPORT (CERTIFICATION)				Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device			Page 14 of 48

## 8.0 TEST RESULTS (ANTENNA 4a)

### 8.1 Summary

Company Name: Apple Inc.  
 FCC ID: BCGA2461  
 IC: 579C-A2461  
 FCC Classification: Digital Transmission System (DTS)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.205 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])	RADIATED	PASS	Sections 8.2

**Table 8-1. Summary of Test Results**

#### Notes:

1. All modes of operation were investigated. The test results shown in the following sections represent the worst case emissions.
2. For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Chamber Automation," Version 1.3.1.
3. Radiated test results in following sections has been conducted on Antenna 4a, per FCC/ISED Approved Data Referencing Test Plan.
4. Below 1GHz and Above 18GHz Radiated Spurious Emissions have been investigated and no significant emissions were found.

FCC ID: BCGA2461 IC: 579C-A2461	 <b>PCTEST<sup>®</sup></b> Proud to be part of element	DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device	Page 15 of 48

## 8.2 Radiated Spurious Emissions – Above 1GHz

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 8-2 per Section 15.209 and RSS-Gen (8.9).***

Frequency	Field Strength [ $\mu$ V/m]	Measured Distance [Meters]
Above 960.0 MHz	500	3

**Table 8-2. Radiated Limits**

### Test Procedures Used

ANSI C63.10-2013 – Section 6.6.4.3

KDB 558074 D01 v05r02 – Section 8.6, 8.7

### Test Settings

#### Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be  $\geq 2 \times$  span/RBW)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces


#### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA2461 IC: 579C-A2461	 PCTEST <sup>®</sup> Proud to be part of element	DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device	Page 16 of 48

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

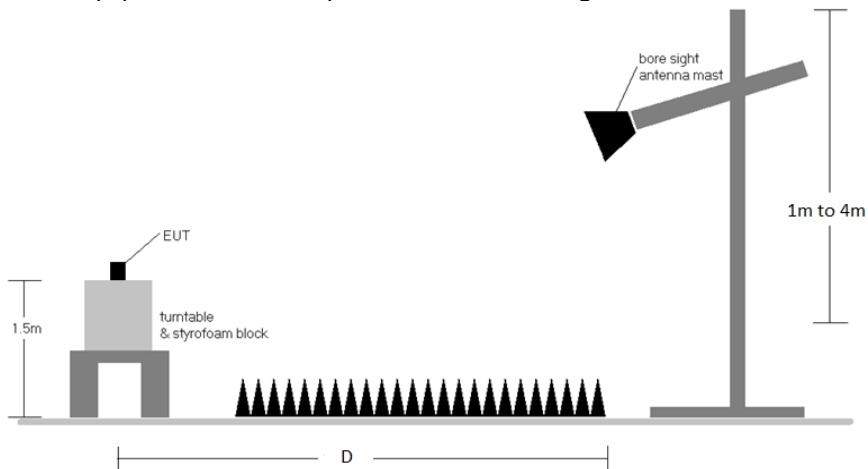

**Figure 8-1. Radiated Test Setup >1GHz**

## Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 558074 D01 v05r02 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 8-2.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
6. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
8. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.
9. All data rates were investigated and only the worst case is reported.
10. For radiated measurements, emissions were investigated for the fully-loaded RU configuration and for all the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.

FCC ID: BCGA2461 IC: 579C-A2461	 PCTEST® Proud to be part of 	DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device	Page 17 of 48

## Sample Calculations

### Determining Spurious Emissions Levels

- Field Strength Level [ $\text{dB}_{\mu\text{V/m}}$ ] = Analyzer Level [ $\text{dBm}$ ] + 107 + AFCL [ $\text{dB/m}$ ]
- AFCL [ $\text{dB/m}$ ] = Antenna Factor [ $\text{dB/m}$ ] + Cable Loss [ $\text{dB}$ ] – Preamplifier Gain [ $\text{dB}$ ]
- Margin [ $\text{dB}$ ] = Field Strength Level [ $\text{dB}_{\mu\text{V/m}}$ ] – Limit [ $\text{dB}_{\mu\text{V/m}}$ ]

### Radiated Band Edge Measurement Offset


- The amplitude offset shown in the radiated restricted band edge plots in sections 8.2.3 and 8.2.4 were calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: BCGA2461 IC: 579C-A2461	 <b>PCTEST<sup>®</sup></b> Proud to be part of element		DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device	Page 18 of 48	

## 8.2.1 Antenna 4a Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

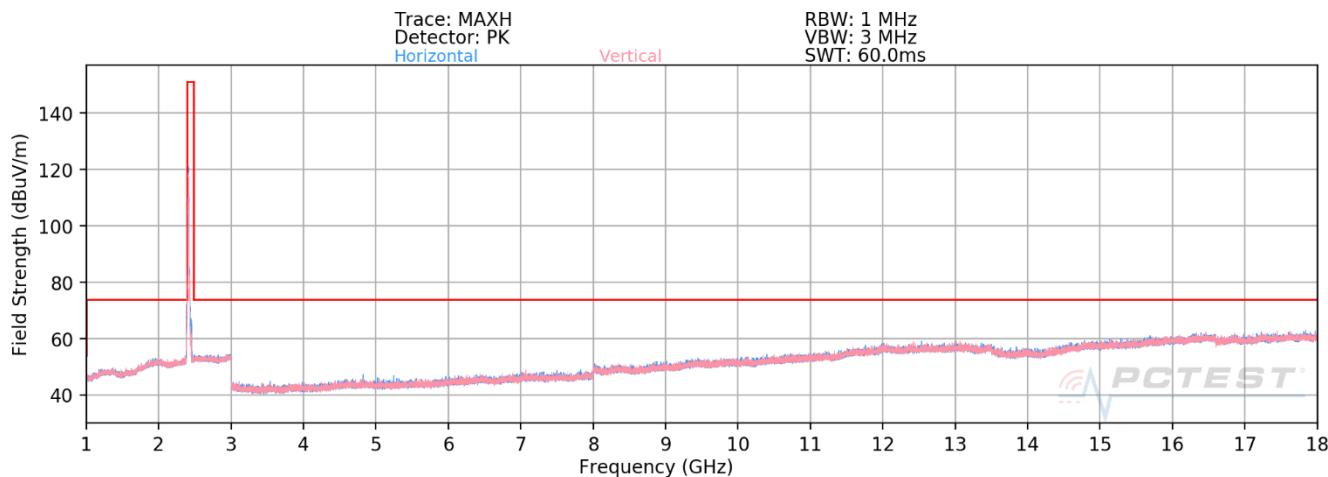


Plot 8-1. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax OFDMA – RU26 – Ch. 1)

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS5
RU Index:	4
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4824.00	Avg	H	116	124	-74.37	5.93	38.56	53.98	-15.42
4824.00	Peak	H	116	124	-62.35	5.93	50.58	73.98	-23.40
12060.00	Avg	H	-	-	-77.20	15.48	45.28	53.98	-8.70
12060.00	Peak	H	-	-	-65.79	15.48	56.69	73.98	-17.29

Table 8-3. Radiated Measurements Antenna 4a (RU26)

FCC ID: BCGA2461 IC: 579C-A2461	PCTEST <sup>®</sup> Proud to be part of element			DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device			

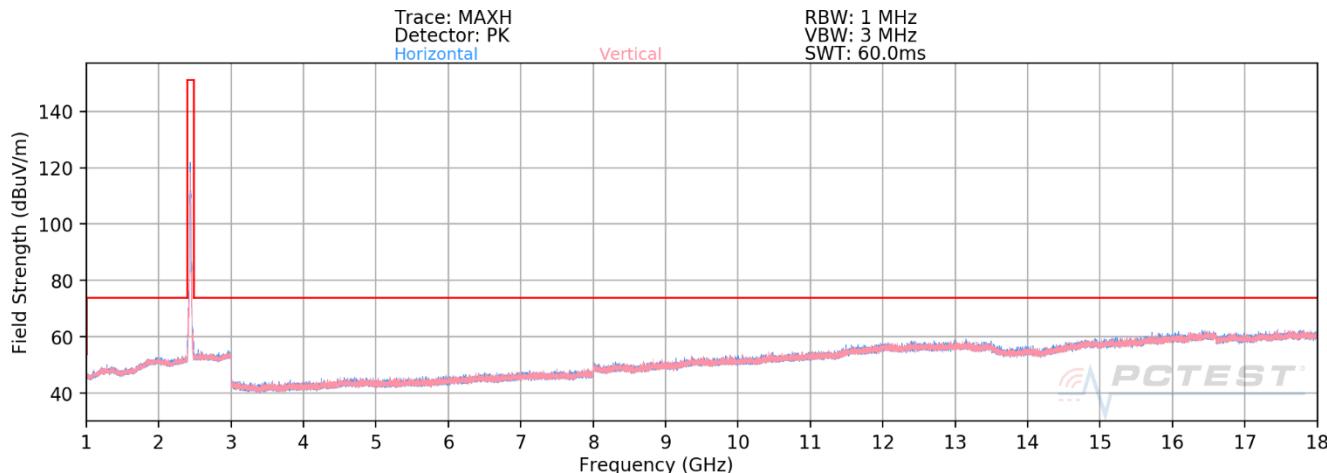



**Plot 8-2. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax OFDMA – RU26 – Ch. 6)**

Worst Case Mode: 802.11ax OFDMA  
Worst Case Transfer Rate: MCS5  
RU Index: 4  
Distance of Measurements: 3 Meters  
Operating Frequency: 2437MHz  
Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4874.00	Avg	H	-	-	-79.83	6.24	33.41	53.98	-20.57
4874.00	Peak	H	-	-	-68.52	6.24	44.72	73.98	-29.26
7311.00	Avg	H	-	-	-80.31	8.73	35.42	53.98	-18.56
7311.00	Peak	H	-	-	-69.63	8.73	46.10	73.98	-27.88
12185.00	Avg	H	-	-	-78.42	15.17	43.75	53.98	-10.23
12185.00	Peak	H	-	-	-66.94	15.17	55.23	73.98	-18.75

**Table 8-4. Radiated Measurements Antenna 4a (RU26)**

FCC ID: BCGA2461 IC: 579C-A2461	 <b>PCTEST®</b> Proud to be part of  DATA REFERENCE REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device		

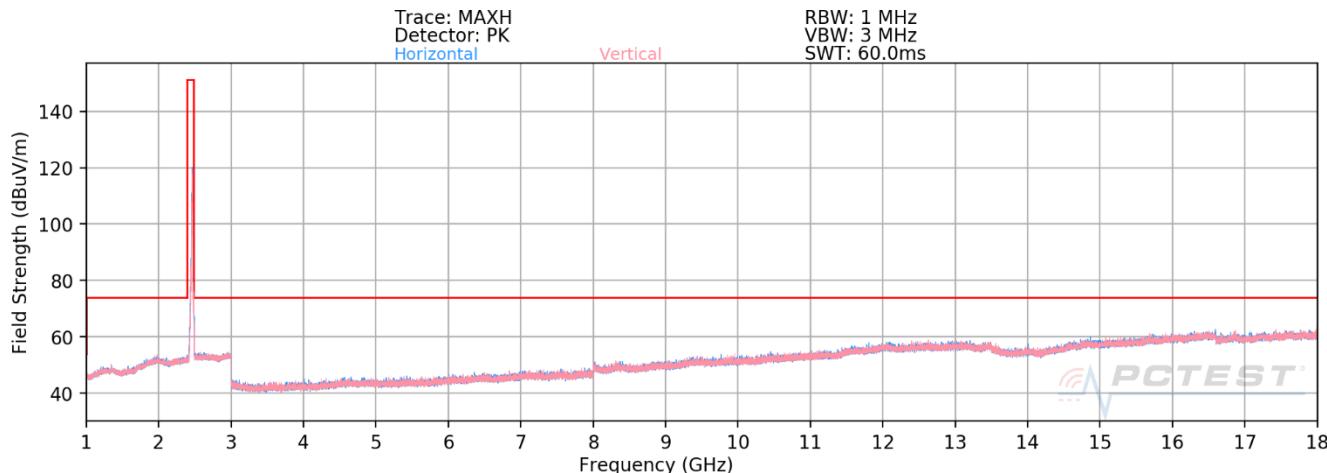


**Plot 8-3. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax OFDMA – RU26 – Ch. 11)**

Worst Case Mode: 802.11ax OFDMA  
Worst Case Transfer Rate: MCS5  
RU Index: 4  
Distance of Measurements: 3 Meters  
Operating Frequency: 2462MHz  
Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4924.00	Avg	H	-	-	-79.39	5.97	33.58	53.98	-20.40
4924.00	Peak	H	-	-	-66.17	5.97	46.80	73.98	-27.18
7386.00	Avg	H	-	-	-79.42	8.50	36.08	53.98	-17.90
7386.00	Peak	H	-	-	-67.84	8.50	47.66	73.98	-26.32
12310.00	Avg	H	-	-	-77.03	15.71	45.68	53.98	-8.30
12310.00	Peak	H	-	-	-65.14	15.71	57.57	73.98	-16.41

**Table 8-5. Radiated Measurements Antenna 4a (RU26)**

FCC ID: BCGA2461 IC: 579C-A2461	<b>PCTEST®</b> Proud to be part of 			DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device			

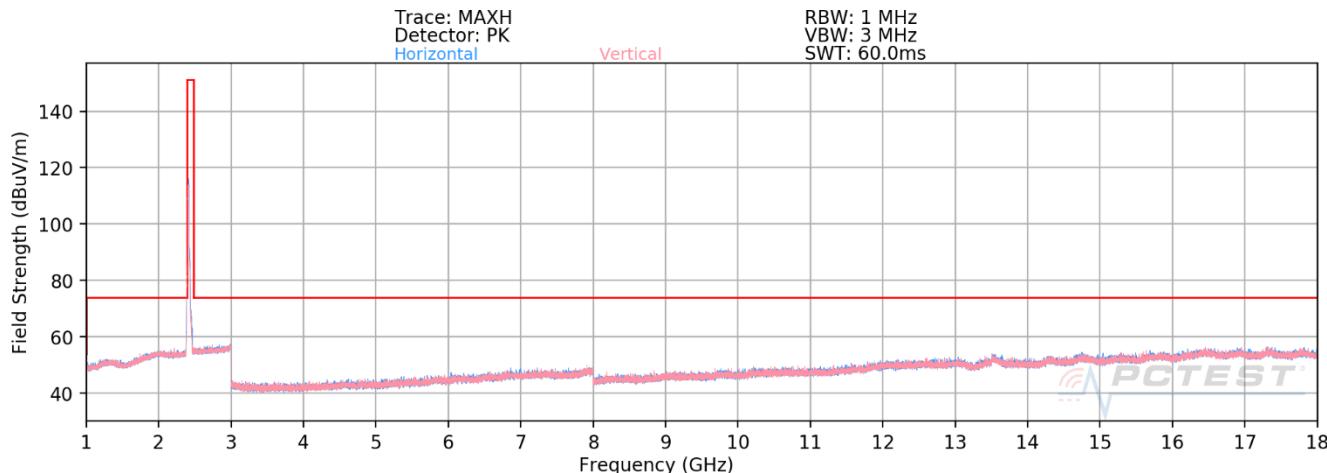


**Plot 8-4: Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax OFDMA – RU242 – Ch. 1)**

Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 4  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4824.00	Avg	-	-	-	-77.83	4.37	33.54	53.98	-20.44
4824.00	Peak	-	-	-	-66.18	4.37	45.19	73.98	-28.79
12060.00	Avg	-	-	-	-84.15	17.76	40.61	53.98	-13.37
12060.00	Peak	-	-	-	-72.59	17.76	52.17	73.98	-21.81

**Plot 8-5: Radiated Measurements Antenna 4a (RU242)**

FCC ID: BCGA2461 IC: 579C-A2461	PCTEST <sup>®</sup> Proud to be part of element			DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device			

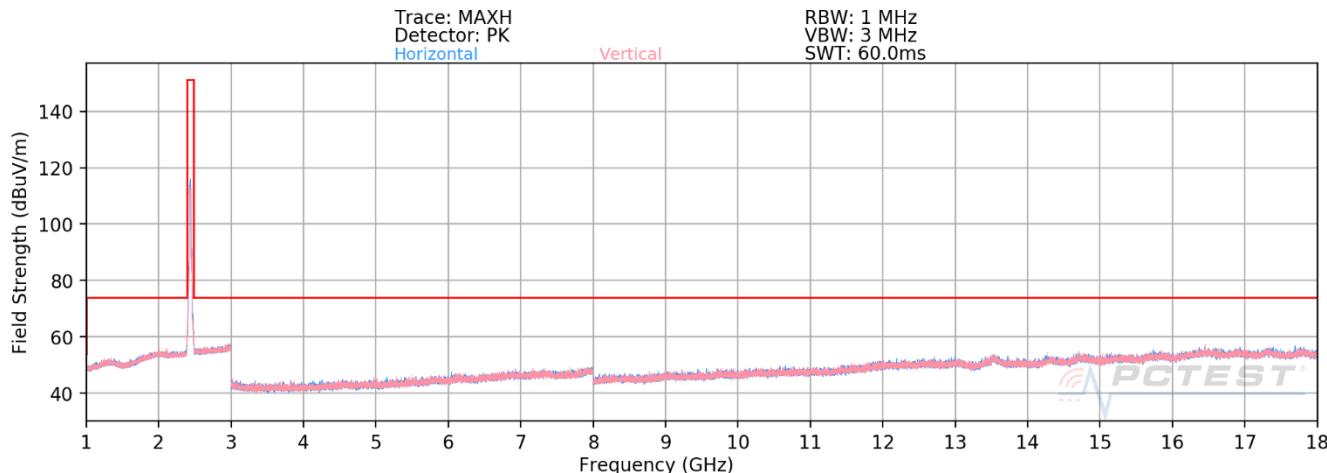



**Plot 8-6: Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax OFDMA – RU242 – Ch. 6)**

Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 4  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4874.00	Avg	-	-	-	-78.09	4.47	33.38	53.98	-20.60
4874.00	Peak	-	-	-	-66.83	4.47	44.64	73.98	-29.34
7311.00	Avg	-	-	-	-79.13	8.66	36.53	53.98	-17.45
7311.00	Peak	-	-	-	-68.06	8.66	47.60	73.98	-26.38
12185.00	Avg	-	-	-	-84.33	17.64	40.31	53.98	-13.67
12185.00	Peak	-	-	-	-73.56	17.64	51.08	73.98	-22.90

**Table 8-6. Radiated Measurements Antenna 4a (RU242)**

FCC ID: BCGA2461 IC: 579C-A2461	 <b>PCTEST®</b> Proud to be part of 			DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device			

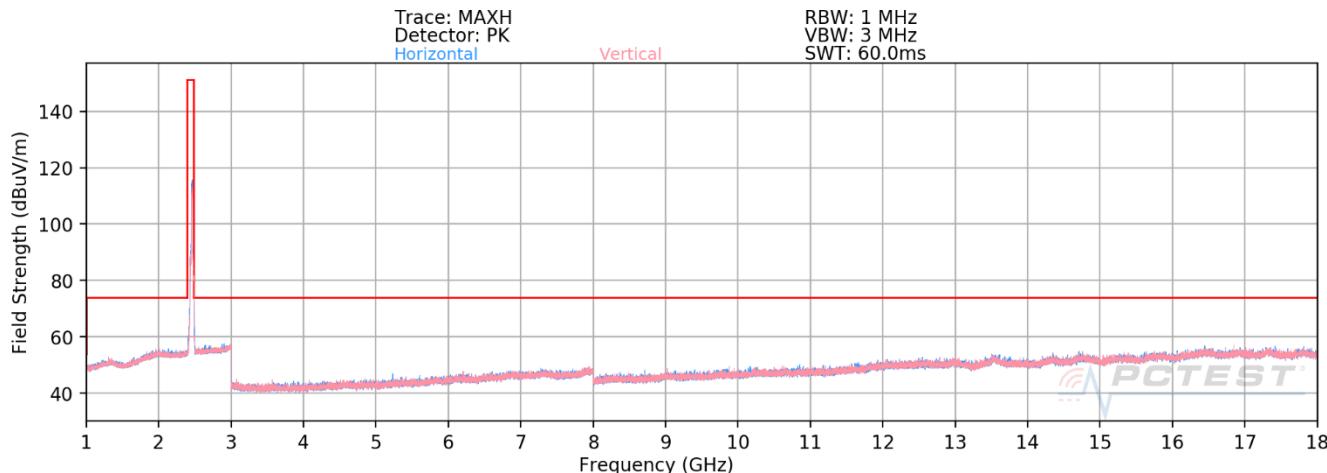

**Plot 8-7: Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax OFDMA – RU242 – Ch. 11)**

Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 4  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4924.00	Avg	-	-	-	-77.55	4.42	33.87	53.98	-20.11
4924.00	Peak	-	-	-	-66.12	4.42	45.30	73.98	-28.68
7386.00	Avg	-	-	-	-78.85	8.72	36.87	53.98	-17.11
7386.00	Peak	-	-	-	-68.01	8.72	47.71	73.98	-26.27
12310.00	Avg	-	-	-	-84.77	17.59	39.82	53.98	-14.16
12310.00	Peak	-	-	-	-73.81	17.59	50.78	73.98	-23.20

**Table 8-7. Radiated Measurements Antenna 4a (RU242)**

FCC ID: BCGA2461 IC: 579C-A2461	 <b>PCTEST<sup>®</sup></b> Proud to be part of element			DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device			

## 8.2.2 CDD Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

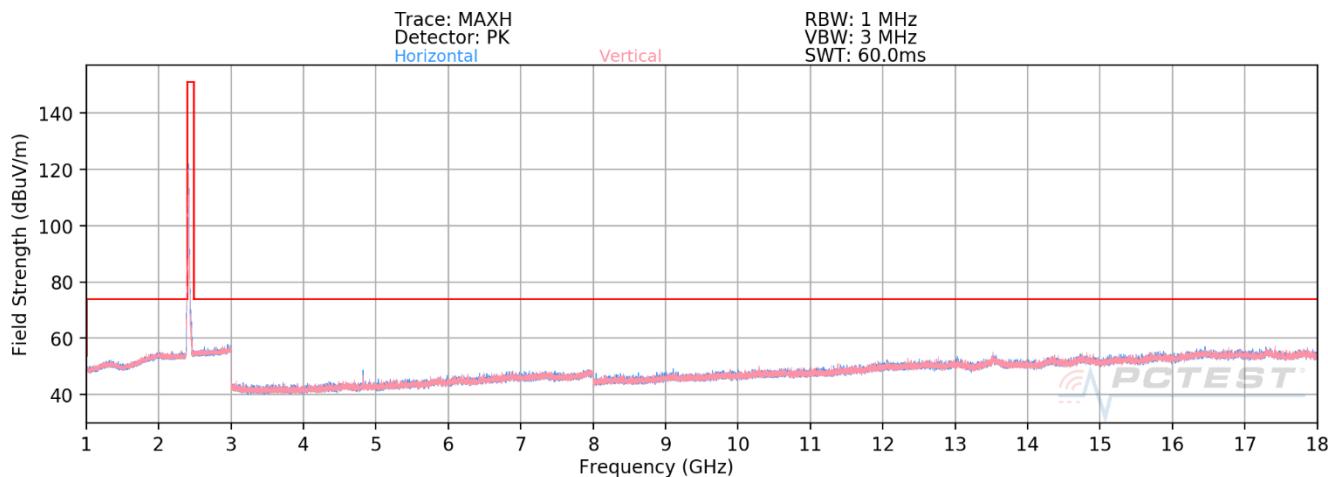


**Plot 8-8. Radiated Spurious Emissions above 1GHz CDD (802.11ax OFDMA – RU26 – Ch. 1)**

Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 4  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	H	119	165	-70.69	4.37	40.68	53.98	-13.30
4824.00	Peak	H	119	165	-59.97	4.37	51.40	73.98	-22.58
12060.00	Avg	-	-	-	-84.31	17.76	40.45	53.98	-13.53
12060.00	Peak	-	-	-	-72.62	17.76	52.14	73.98	-21.84

**Table 8-8. Radiated Measurements CDD (RU26)**

FCC ID: BCGA2461 IC: 579C-A2461	 <b>PCTEST<sup>®</sup></b> Proud to be part of element			DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device			

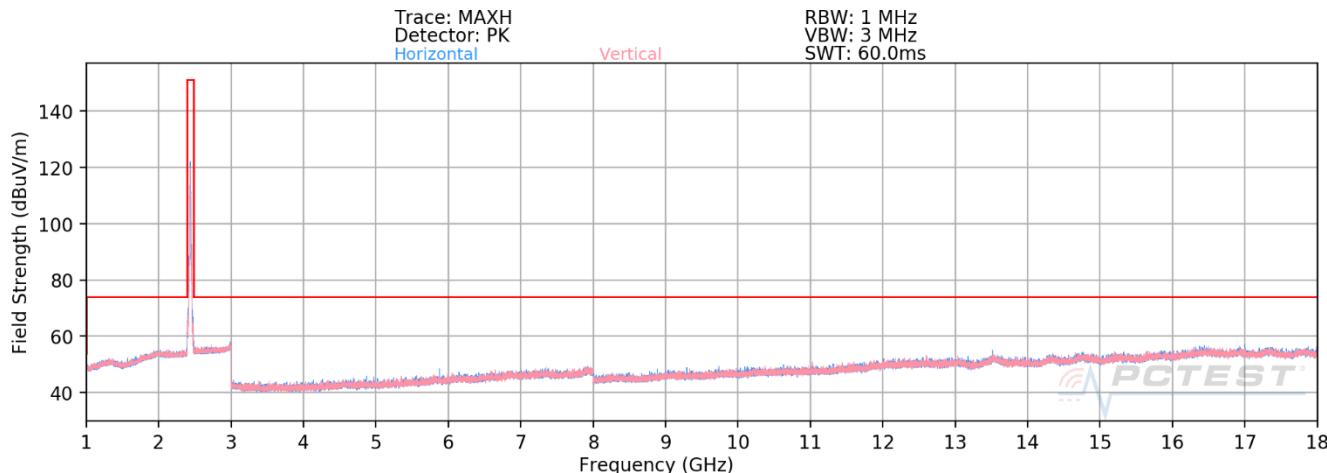


**Plot 8-9. Radiated Spurious Emissions above 1GHz CDD (802.11ax OFDMA – RU26 – Ch. 6)**

Worst Case Mode: 802.11ax OFDMA  
Worst Case Transfer Rate: MCS5  
RU Index: 4  
Distance of Measurements: 3 Meters  
Operating Frequency: 2437MHz  
Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4874.00	Avg	-	117	343	-73.96	4.47	37.51	53.98	-16.47
4874.00	Peak	-	117	343	-62.62	4.47	48.85	73.98	-25.13
7311.00	Avg	-	-	-	-79.42	8.66	36.24	53.98	-17.74
7311.00	Peak	-	-	-	-67.49	8.66	48.17	73.98	-25.81
12185.00	Avg	-	-	-	-84.56	17.64	40.08	53.98	-13.90
12185.00	Peak	-	-	-	-73.00	17.64	51.64	73.98	-22.34

**Table 8-9. Radiated Measurements CDD (RU26)**

FCC ID: BCGA2461 IC: 579C-A2461	<b>PCTEST®</b> Proud to be part of 			DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device			

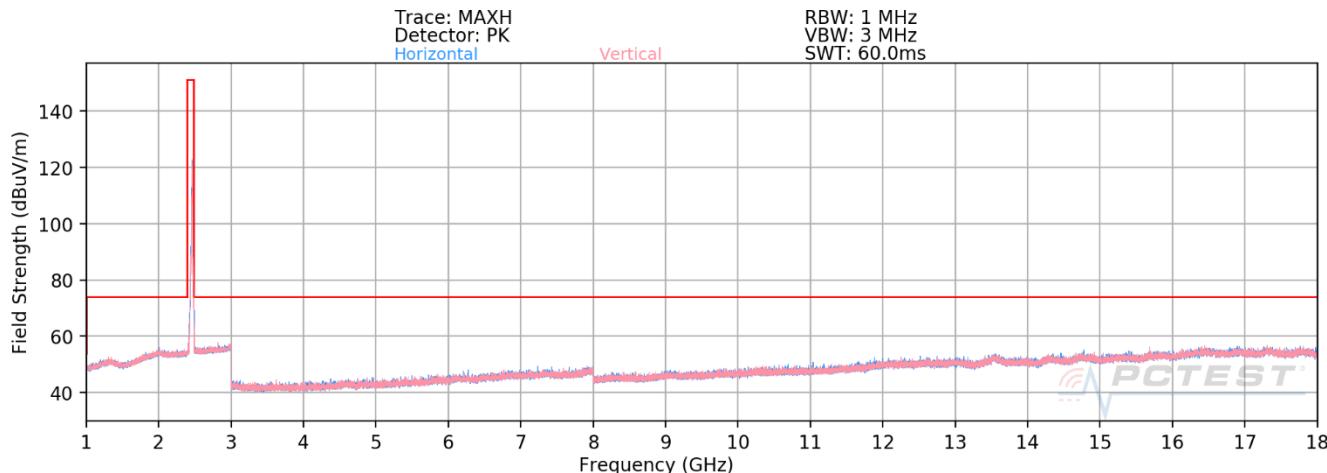


**Plot 8-10. Radiated Spurious Emissions above 1GHz CDD (802.11ax OFDMA – RU26 – Ch. 11)**

Worst Case Mode: 802.11ax OFDMA  
Worst Case Transfer Rate: MCS5  
RU Index: 4  
Distance of Measurements: 3 Meters  
Operating Frequency: 2462MHz  
Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4924.00	Avg	-	-	-	-77.53	4.42	33.89	53.98	-20.09
4924.00	Peak	-	-	-	-66.14	4.42	45.28	73.98	-28.70
7386.00	Avg	-	-	-	-79.70	8.72	36.02	53.98	-17.96
7386.00	Peak	-	-	-	-67.99	8.72	47.73	73.98	-26.25
12310.00	Avg	-	-	-	-84.72	17.59	39.87	53.98	-14.11
12310.00	Peak	-	-	-	-73.19	17.59	51.40	73.98	-22.58

**Table 8-10. Radiated Measurements CDD (RU26)**

FCC ID: BCGA2461 IC: 579C-A2461	<b>PCTEST®</b> Proud to be part of 			DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device			

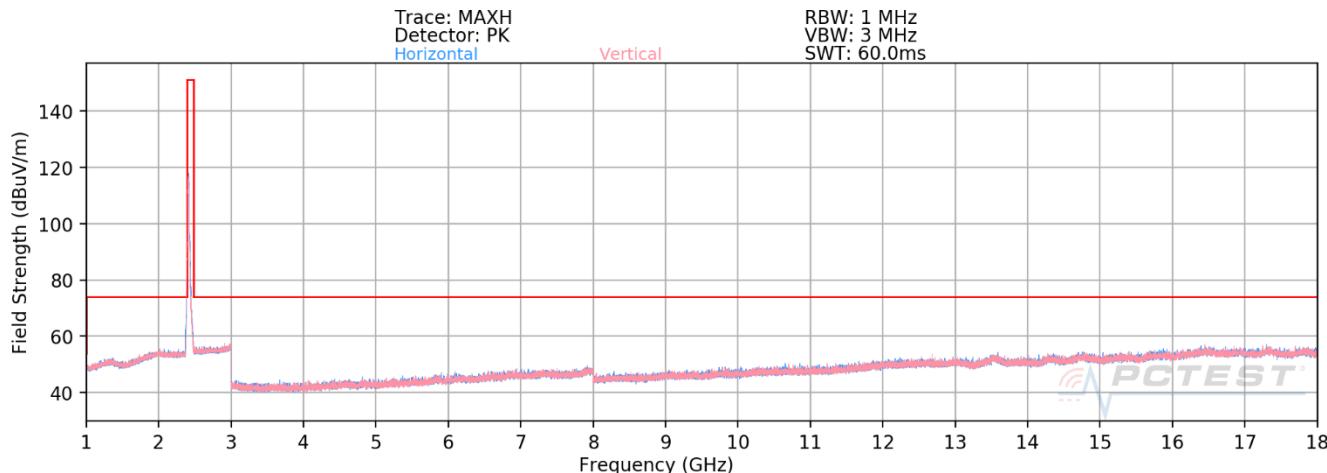



**Plot 8-11. Radiated Spurious Emissions above 1GHz CDD (802.11ax OFDMA – RU242 – Ch. 1)**

Worst Case Mode: 802.11ax OFDMA  
Worst Case Transfer Rate: MCS5  
RU Index: 61  
Distance of Measurements: 3 Meters  
Operating Frequency: 2412MHz  
Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4824.00	Avg	-	-	-	-77.64	4.37	33.73	53.98	-20.25
4824.00	Peak	-	-	-	-65.60	4.37	45.77	73.98	-28.21
12060.00	Avg	-	-	-	-84.29	17.76	40.47	53.98	-13.51
12060.00	Peak	-	-	-	-72.23	17.76	52.53	73.98	-21.45

**Table 8-11. Radiated Measurements CDD (RU242)**

FCC ID: BCGA2461 IC: 579C-A2461	 PCTEST® Proud to be part of 			DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device			

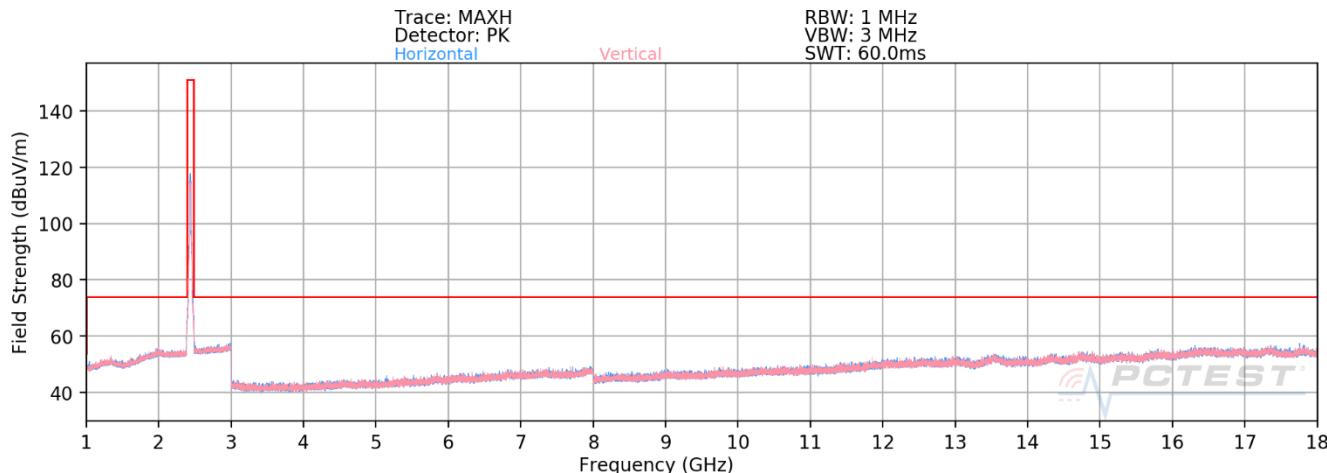


**Plot 8-12. Radiated Spurious Emissions above 1GHz CDD (802.11ax OFDMA – RU242 – Ch. 6)**

Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4874.00	Avg	-	-	-	-78.12	4.47	33.35	53.98	-20.63
4874.00	Peak	-	-	-	-66.68	4.47	44.79	73.98	-29.19
7311.00	Avg	-	-	-	-79.60	8.66	36.06	53.98	-17.92
7311.00	Peak	-	-	-	-67.72	8.66	47.94	73.98	-26.04
12185.00	Avg	-	-	-	-84.39	17.64	40.25	53.98	-13.73
12185.00	Peak	-	-	-	-72.50	17.64	52.14	73.98	-21.84

**Table 8-12. Radiated Measurements CDD (RU242)**

FCC ID: BCGA2461 IC: 579C-A2461	 <b>PCTEST<sup>®</sup></b> Proud to be part of element			DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device			Page 29 of 48

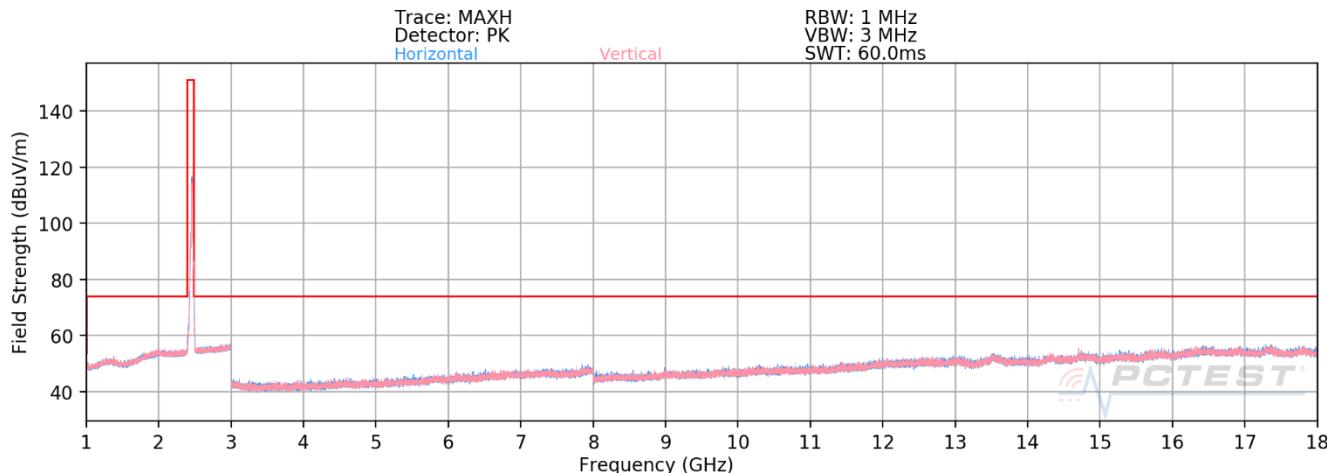

**Plot 8-13. Radiated Spurious Emissions above 1GHz CDD (802.11ax OFDMA – RU242 – Ch. 11)**

Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4924.00	Avg	-	-	-	-77.96	4.42	33.46	53.98	-20.52
4924.00	Peak	-	-	-	-66.37	4.42	45.05	73.98	-28.93
7386.00	Avg	-	-	-	-79.55	8.72	36.17	53.98	-17.81
7386.00	Peak	-	-	-	-67.97	8.72	47.75	73.98	-26.23
12310.00	Avg	-	-	-	-84.62	17.59	39.97	53.98	-14.01
12310.00	Peak	-	-	-	-72.64	17.59	51.95	73.98	-22.03

**Table 8-13. Radiated Measurements CDD (RU242)**


FCC ID: BCGA2461 IC: 579C-A2461	 <b>PCTEST®</b> Proud to be part of 			DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device			

### 8.2.3 Antenna 4a Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.


Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 1

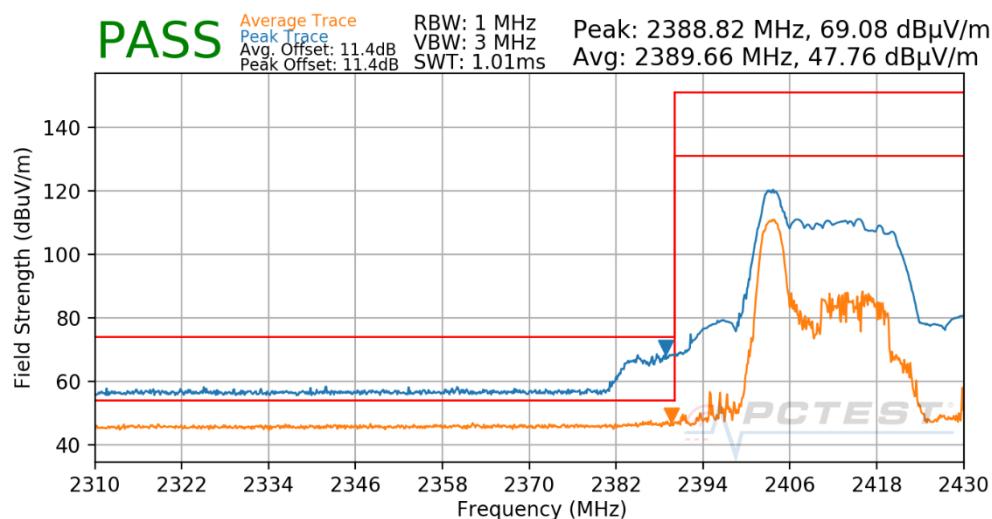

Plot 8-14. Radiated Restricted Lower Band Edge Measurement Antenna 4a (Average & Peak – RU26)


FCC ID: BCGA2461 IC: 579C-A2461	 <b>PCTEST<sup>®</sup></b> Proud to be part of element		DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device	Page 31 of 48	

Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2417MHz  
 Channel: 2

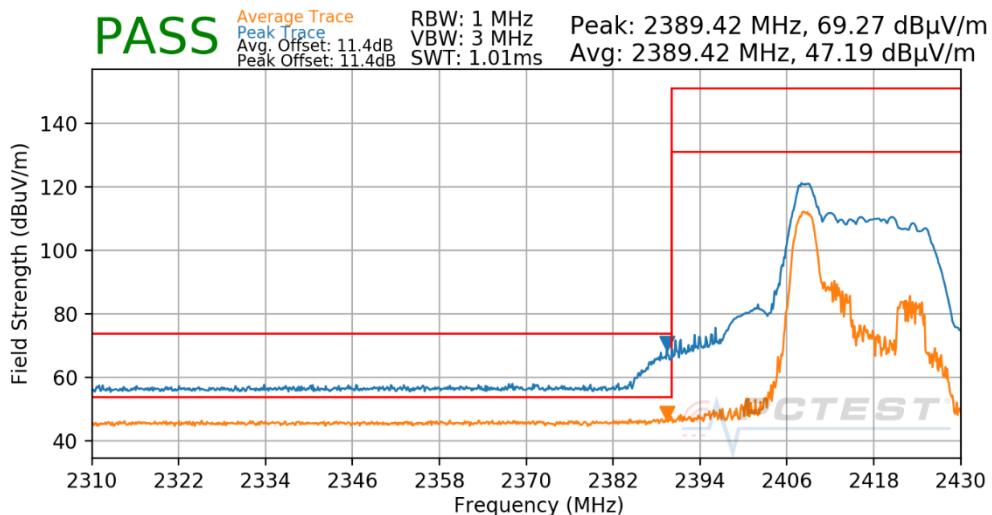

**Plot 8-15. Radiated Restricted Lower Band Edge Measurement Antenna 4a (Average & Peak – RU26)**


Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2422MHz  
 Channel: 3

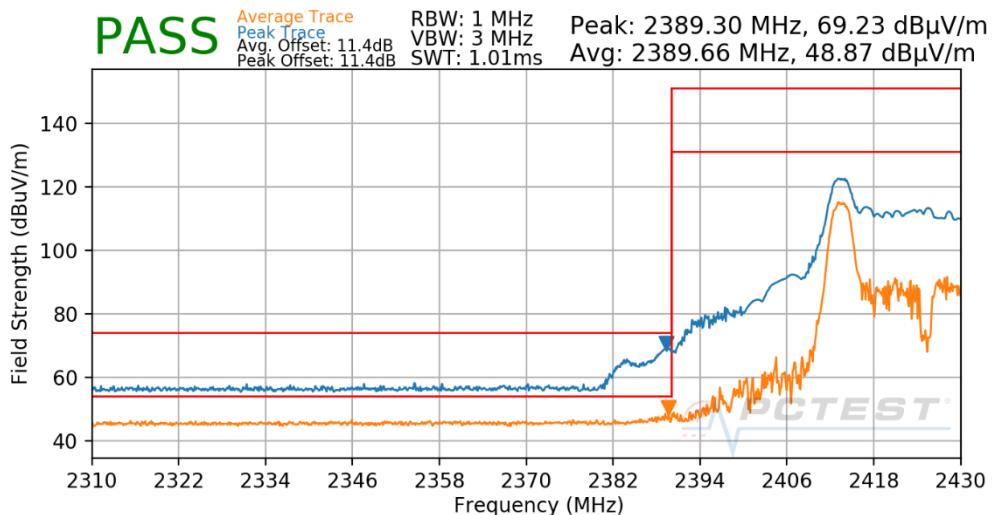

**Plot 8-16. Radiated Restricted Lower Band Edge Measurement Antenna 4a (Average & Peak – RU26)**


FCC ID: BCGA2461 IC: 579C-A2461	<b>PCTEST®</b> Proud to be part of  element		DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device	Page 32 of 48	

Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 8  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2452MHz  
 Channel: 9

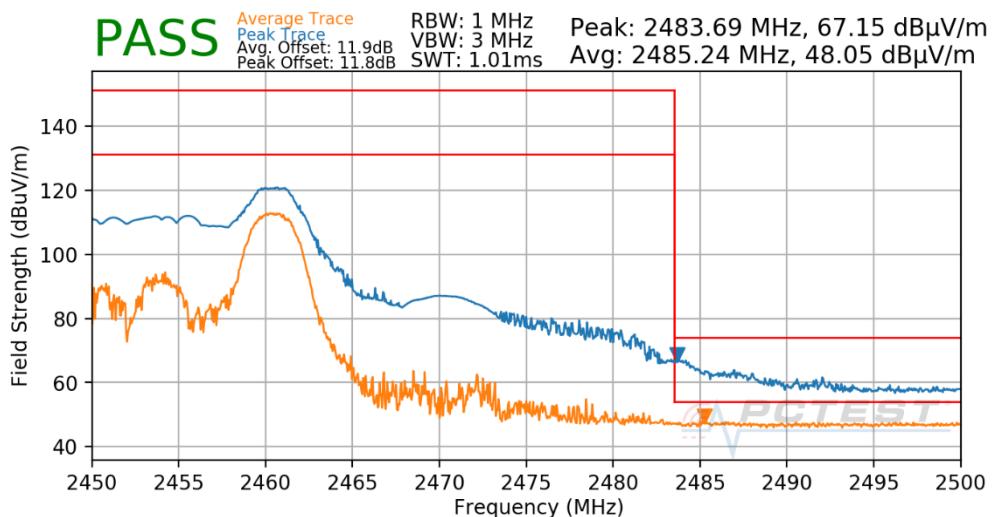

**Plot 8-17. Radiated Restricted Upper Band Edge Measurement Antenna 4a (Average & Peak – RU26)**


Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 8  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2457MHz  
 Channel: 10

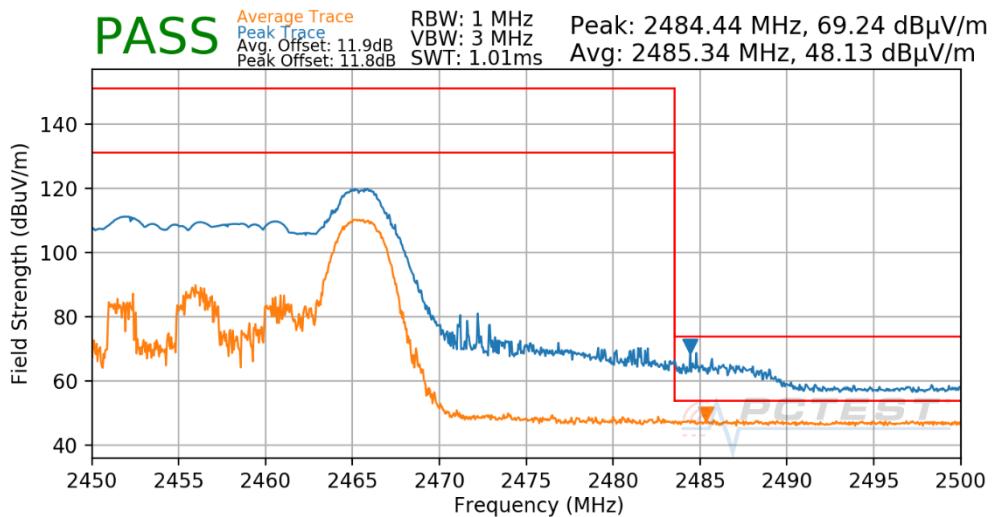

**Plot 8-18. Radiated Restricted Upper Band Edge Measurement Antenna 4a (Average & Peak – RU26)**


FCC ID: BCGA2461 IC: 579C-A2461	<b>PCTEST</b> Proud to be part of 		DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device		Page 33 of 48

Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 8  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

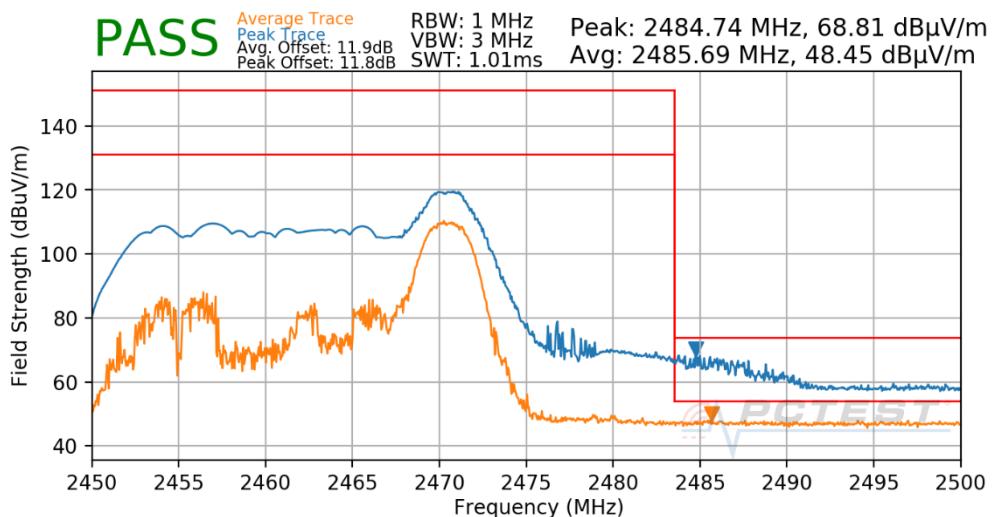

**Plot 8-19. Radiated Restricted Upper Band Edge Measurement Antenna 4a (Average & Peak – RU26)**


Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 8  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2467MHz  
 Channel: 12

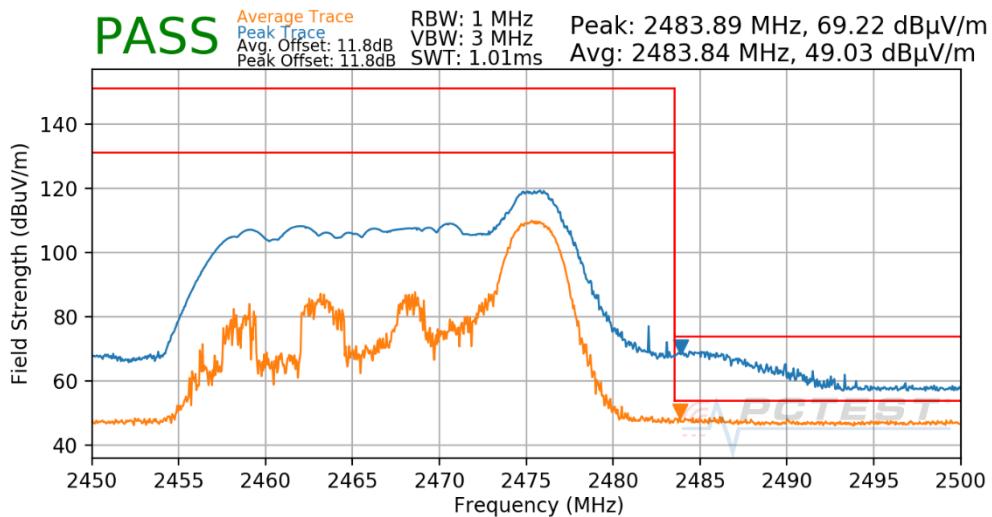

**Plot 8-20. Radiated Restricted Upper Band Edge Measurement Antenna 4a (Average & Peak – RU26)**


FCC ID: BCGA2461 IC: 579C-A2461	<b>PCTEST</b> Proud to be part of  element		DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device		Page 34 of 48

Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 1

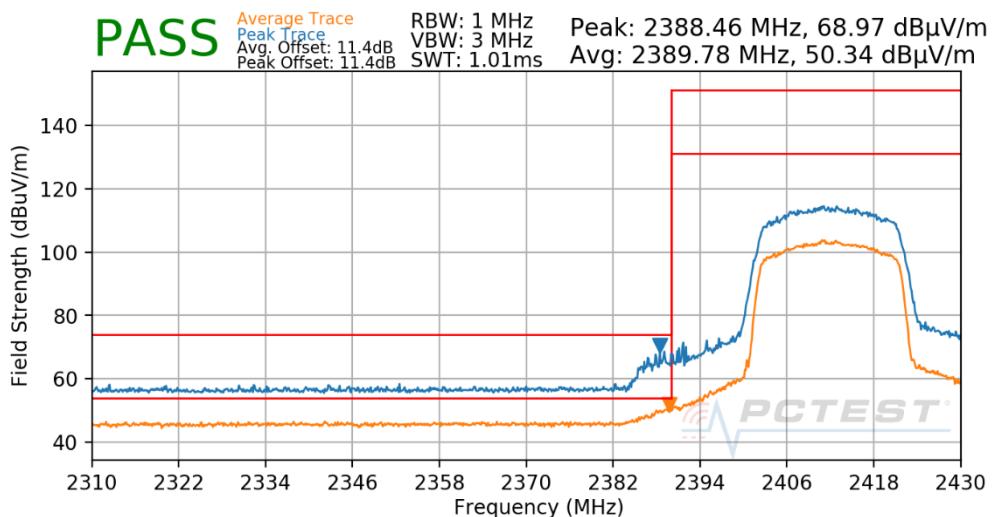

**Plot 8-21. Radiated Restricted Lower Band Edge Measurement Antenna 4a (Average & Peak – RU242)**


Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2417MHz  
 Channel: 2

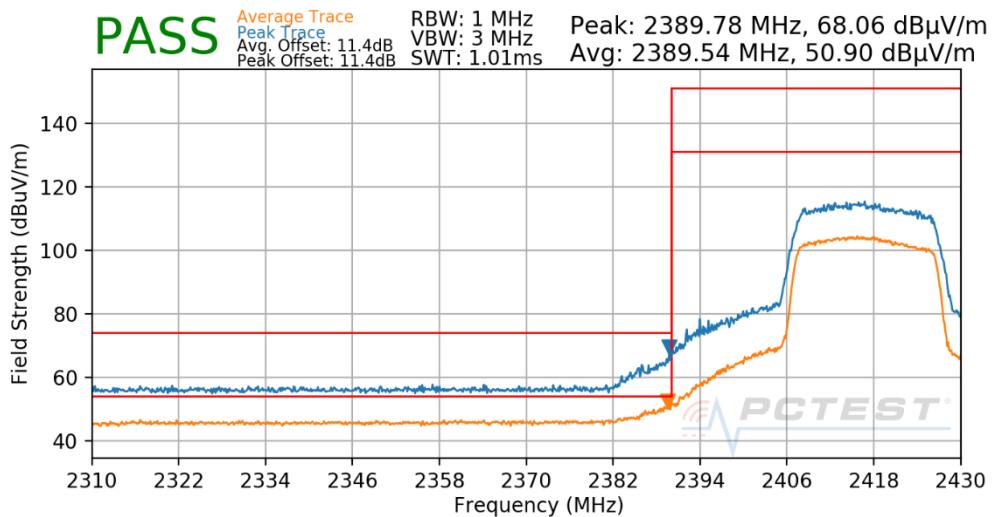

**Plot 8-22: Radiated Restricted Lower Band Edge Measurement Antenna 4a (Average & Peak – RU242)**


FCC ID: BCGA2461 IC: 579C-A2461	<b>PCTEST®</b> Proud to be part of 		DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device		Page 35 of 48

Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2422MHz  
 Channel: 3

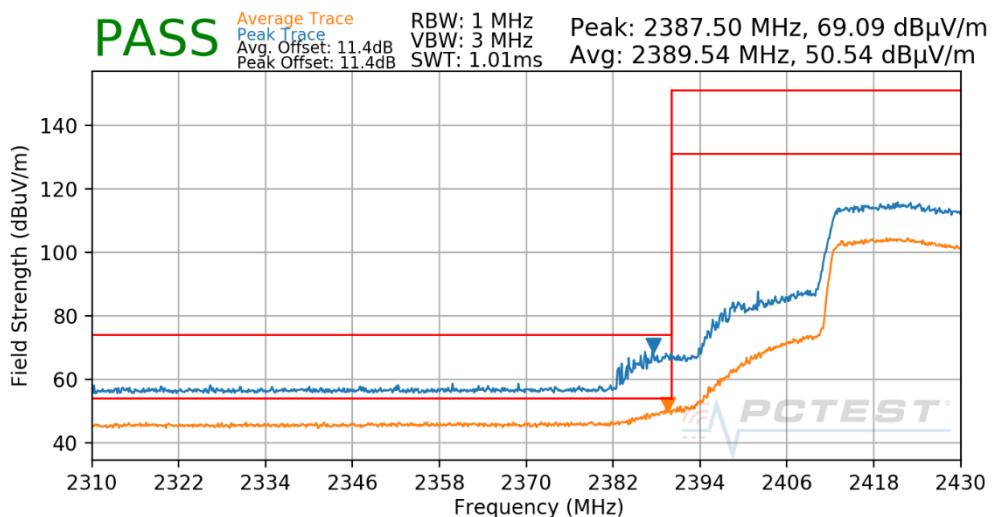

**Plot 8-23: Radiated Restricted Lower Band Edge Measurement Antenna 4a (Average & Peak – RU242)**


Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2452MHz  
 Channel: 9

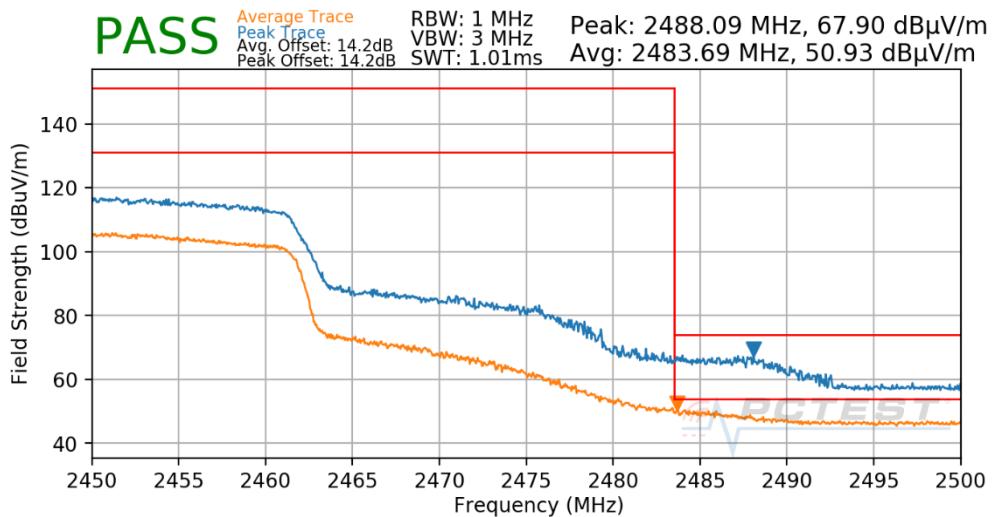

**Plot 8-24: Radiated Restricted Upper Band Edge Measurement Antenna 4a (Average & Peak – RU242)**


FCC ID: BCGA2461 IC: 579C-A2461	<b>PCTEST®</b> Proud to be part of  element		DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device		Page 36 of 48

Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2457MHz  
 Channel: 10

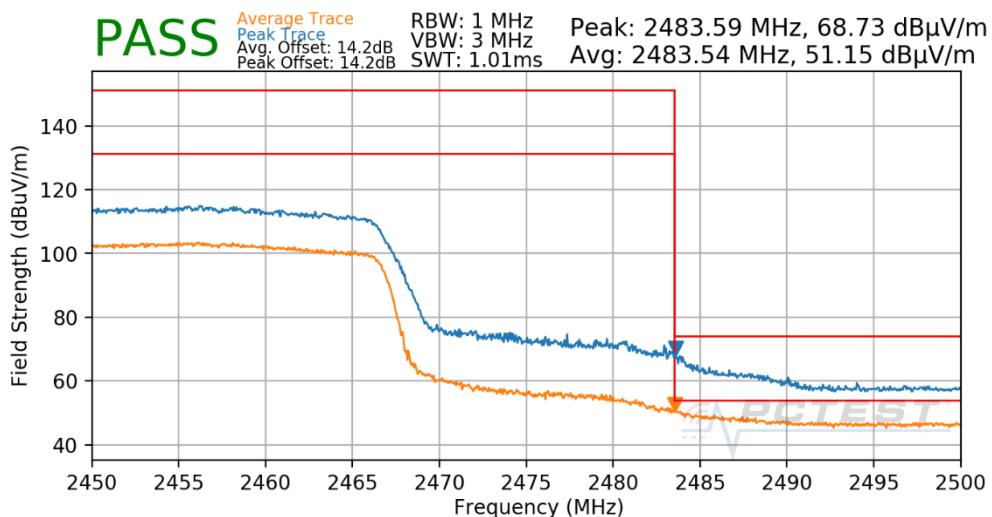

**Plot 8-25: Radiated Restricted Upper Band Edge Measurement Antenna 4a (Average & Peak – RU242)**


Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

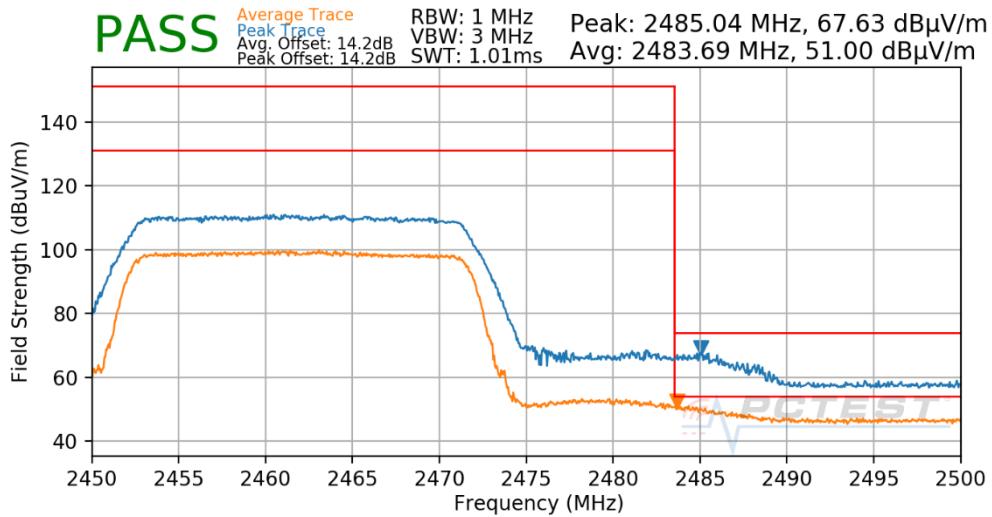

**Plot 8-26: Radiated Restricted Upper Band Edge Measurement Antenna 4a (Average & Peak – RU242)**

FCC ID: BCGA2461 IC: 579C-A2461	<b>PCTEST</b> Proud to be part of 		DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device		Page 37 of 48

Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2467MHz  
 Channel: 12

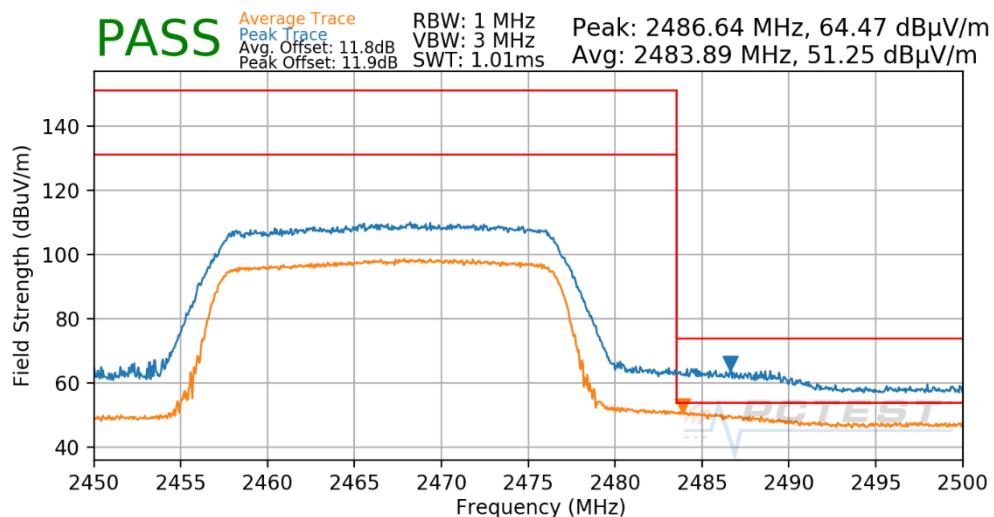

**Plot 8-27: Radiated Restricted Upper Band Edge Measurement Antenna 4a (Average & Peak – RU242)**


FCC ID: BCGA2461 IC: 579C-A2461	 <b>PCTEST®</b> Proud to be part of 		DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device	Page 38 of 48	

## 8.2.4 CDD Radiated Restricted Band Edge Measurements

### §15.205 §15.209; RSS-Gen [8.9]

radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.


Worst Case Mode: 802.11ax OFDMA  
Worst Case Transfer Rate: MCS5  
RU Index: 0  
Distance of Measurements: 3 Meters  
Operating Frequency: 2412MHz  
Channel: 1

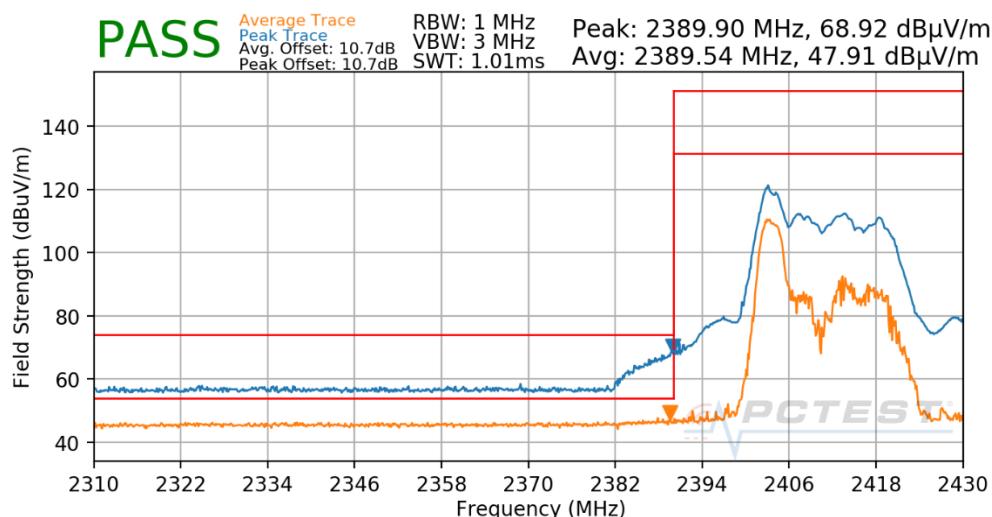

Plot 8-28: Radiated Restricted Lower Band Edge Measurement CDD (Average & Peak – RU26)


FCC ID: BCGA2461 IC: 579C-A2461	<b>PCTEST®</b> Proud to be part of 		DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device	Page 39 of 48	

Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2417MHz  
 Channel: 2

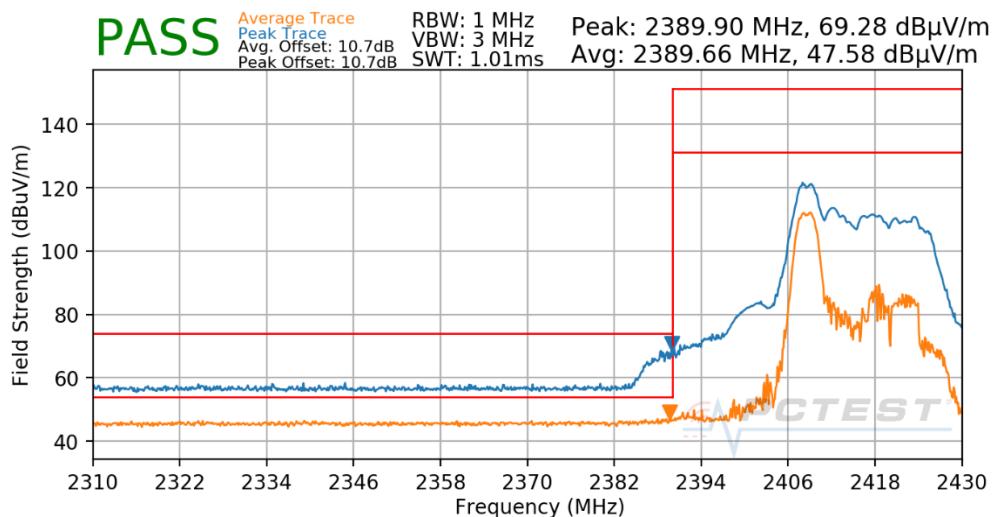

**Plot 8-29: Radiated Restricted Lower Band Edge Measurement CDD (Average & Peak – RU26)**


Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2422MHz  
 Channel: 3

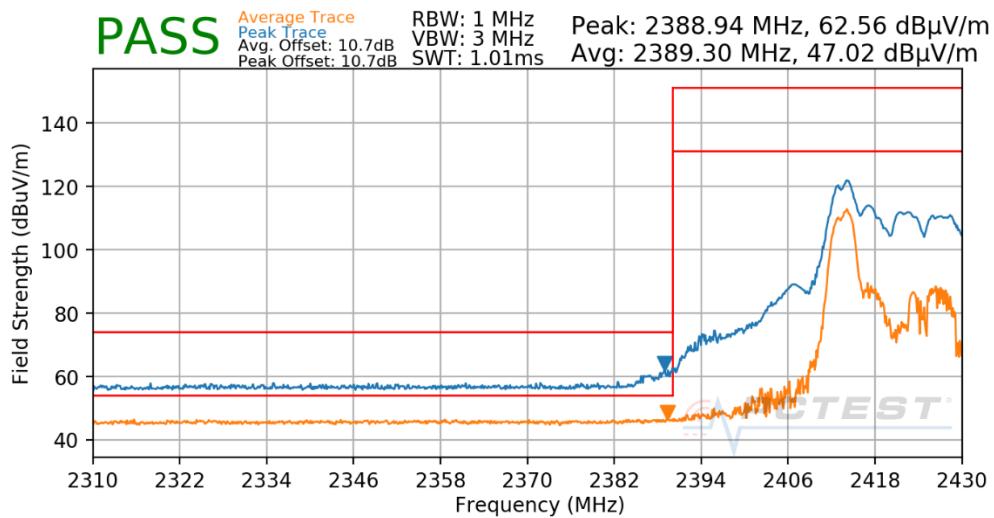

**Plot 8-30: Radiated Restricted Lower Band Edge Measurement CDD (Average & Peak – RU26)**


FCC ID: BCGA2461 IC: 579C-A2461	<b>PCTEST</b> Proud to be part of 	DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device	Page 40 of 48

Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 8  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2452MHz  
 Channel: 9

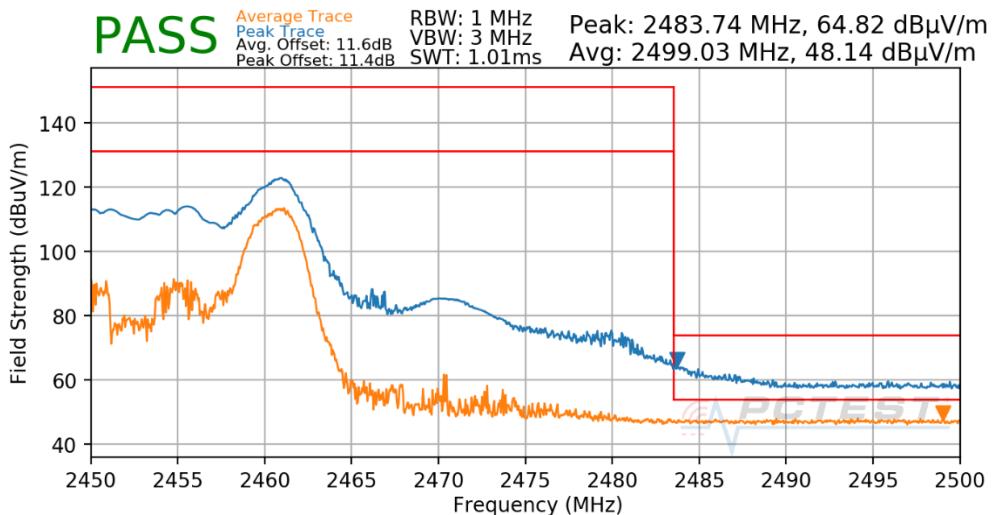

**Plot 8-31: Radiated Restricted Upper Band Edge Measurement CDD (Average & Peak – RU26)**


Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 8  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2457MHz  
 Channel: 10

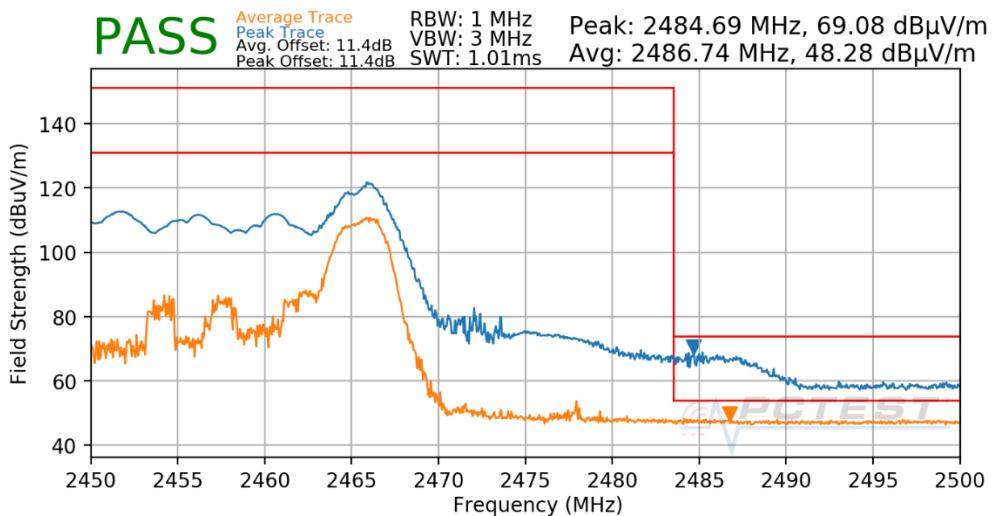

**Plot 8-32: Radiated Restricted Upper Band Edge Measurement CDD (Average & Peak – RU26)**


FCC ID: BCGA2461 IC: 579C-A2461	<b>PCTEST</b> Proud to be part of  element			DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device			Page 41 of 48

Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 8  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

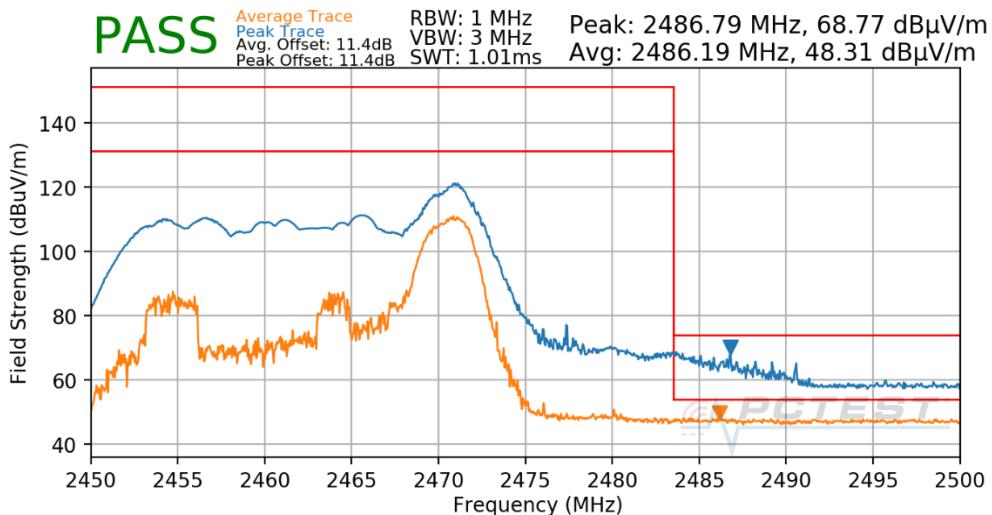

**Plot 8-33: Radiated Restricted Upper Band Edge Measurement CDD (Average & Peak – RU26)**


Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 8  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2467MHz  
 Channel: 12

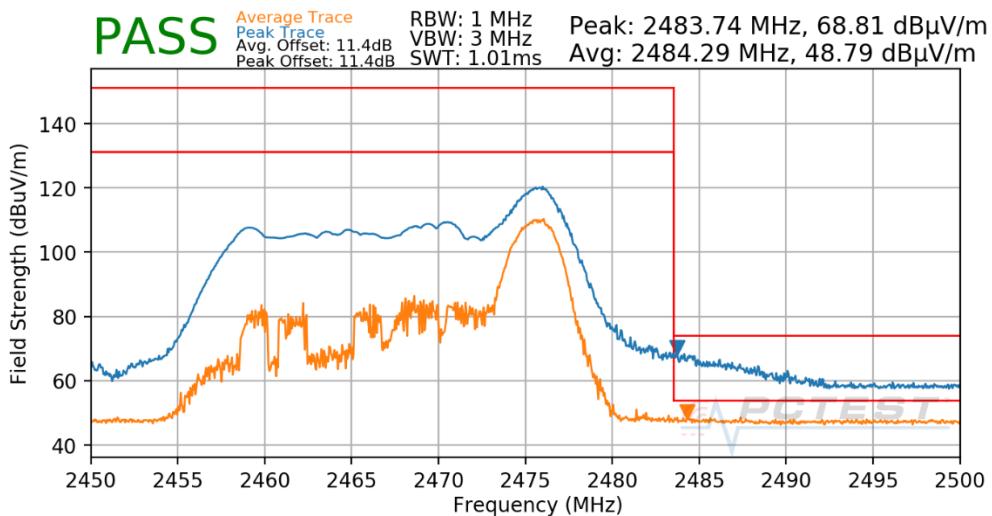

**Plot 8-34: Radiated Restricted Upper Band Edge Measurement CDD (Average & Peak – RU26)**


FCC ID: BCGA2461 IC: 579C-A2461	<b>PCTEST®</b> Proud to be part of  element		DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device	Page 42 of 48	

Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 1

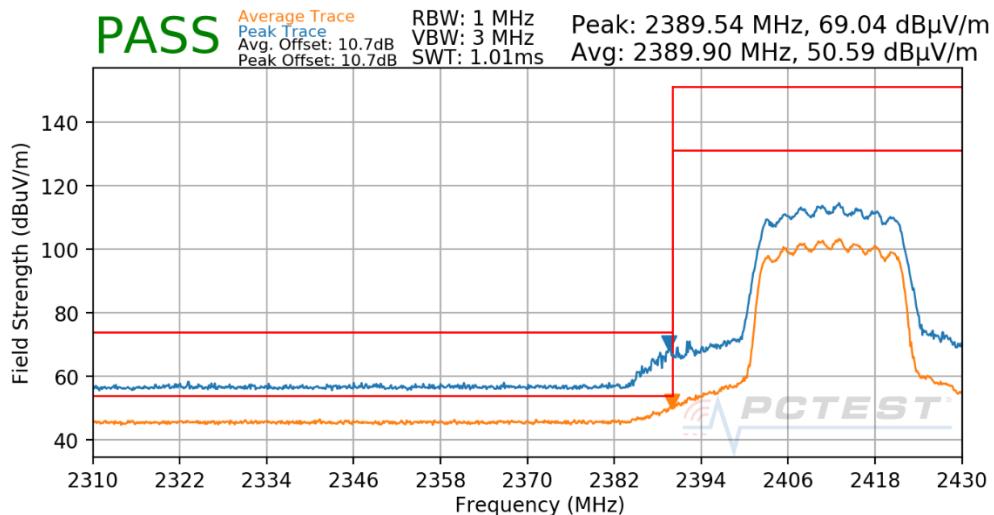


**Plot 8-35: Radiated Restricted Lower Band Edge Measurement CDD (Average & Peak – RU242)**


Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2417MHz  
 Channel: 2

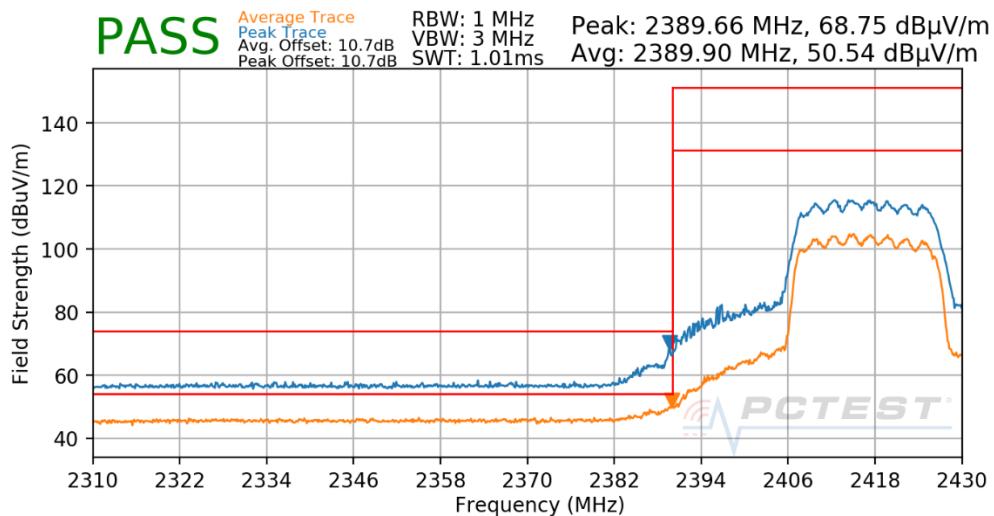

**Plot 8-36: Radiated Restricted Lower Band Edge Measurement CDD (Average & Peak – RU242)**


FCC ID: BCGA2461 IC: 579C-A2461	 PCTEST® Proud to be part of 	DATA REFERENCE REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device		Page 43 of 48

Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2422MHz  
 Channel: 3

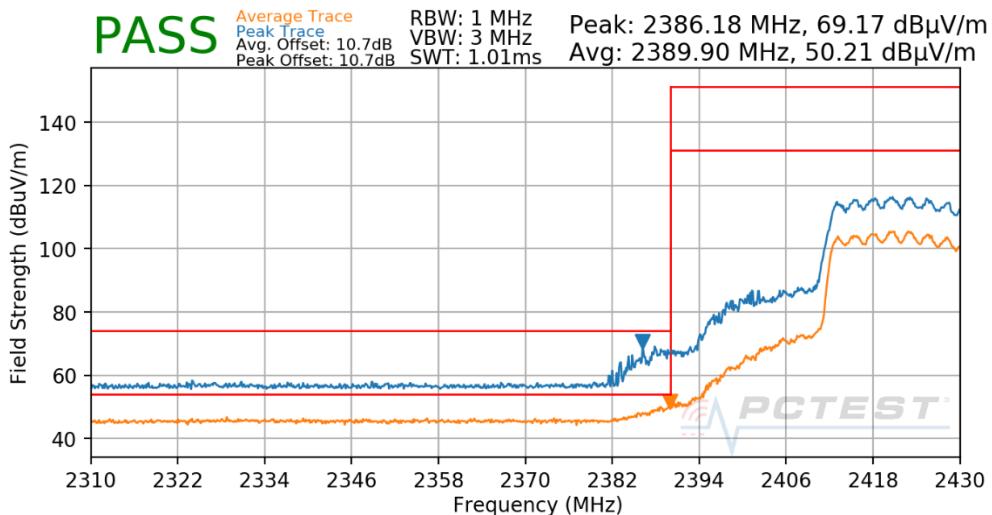

**Plot 8-37: Radiated Restricted Lower Band Edge Measurement CDD (Average & Peak – RU242)**


Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2452MHz  
 Channel: 9

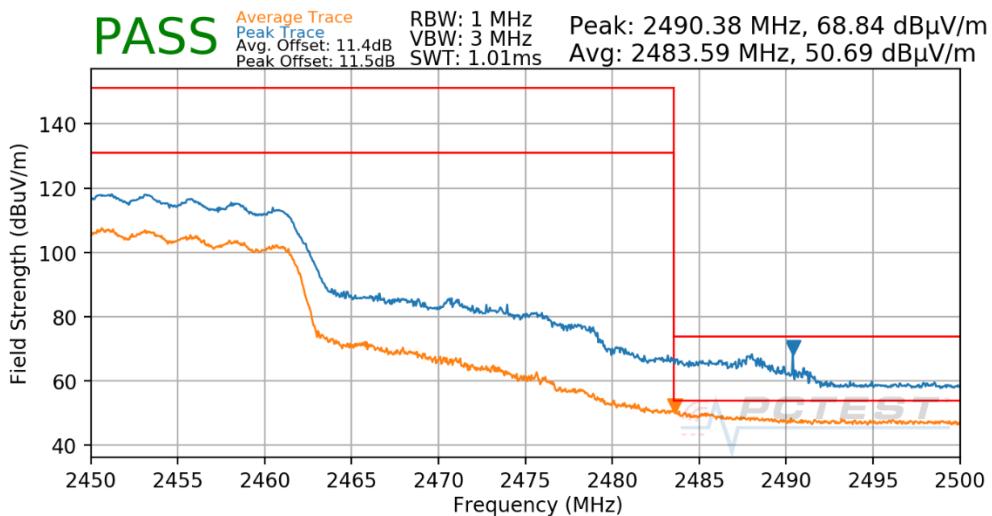

**Plot 8-38: Radiated Restricted Upper Band Edge Measurement CDD (Average & Peak – RU242)**


FCC ID: BCGA2461 IC: 579C-A2461	 <b>DATA REFERENCE REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device		Page 44 of 48

Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2457MHz  
 Channel: 10

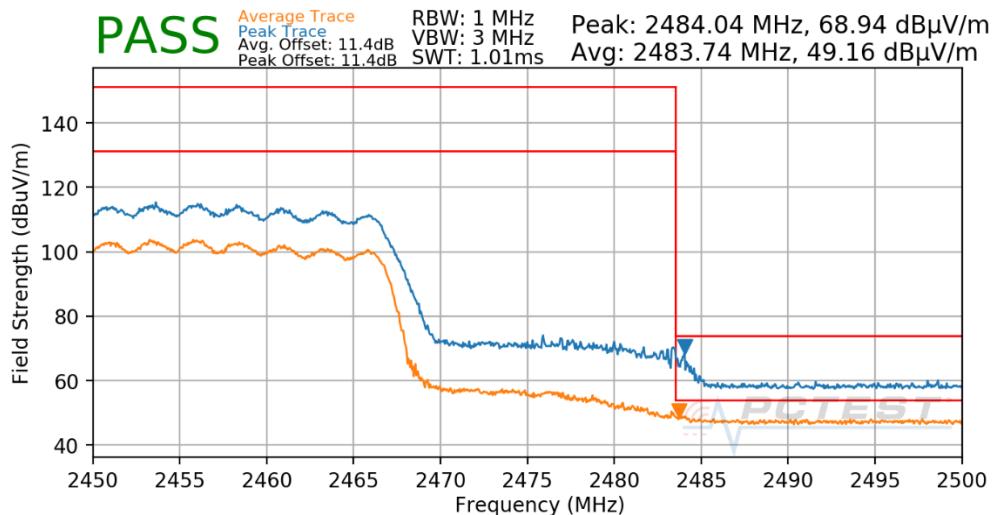

**Plot 8-39: Radiated Restricted Upper Band Edge Measurement CDD (Average & Peak – RU242)**


Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

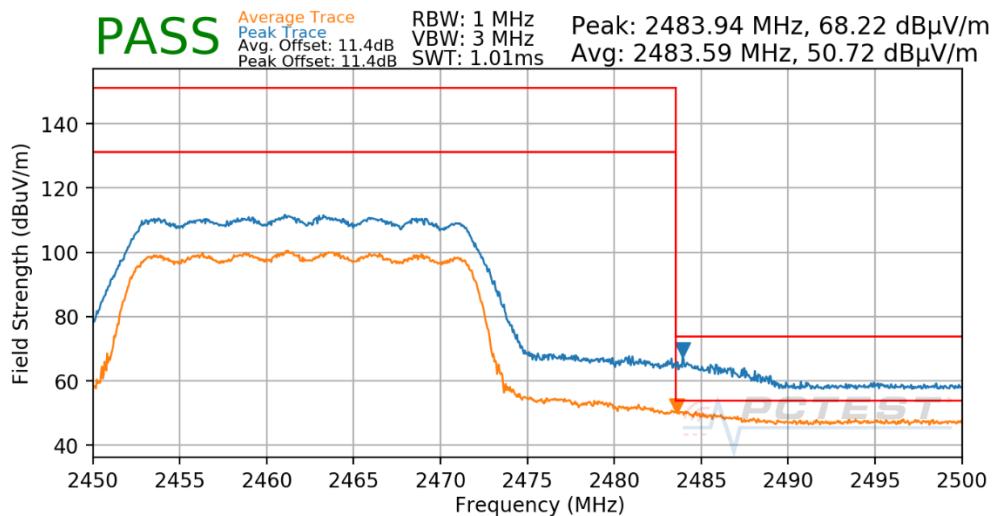

**Plot 8-40: Radiated Restricted Upper Band Edge Measurement CDD (Average & Peak – RU242)**

FCC ID: BCGA2461 IC: 579C-A2461	<b>PCTEST</b> Proud to be part of 			DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device			Page 45 of 48

Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS5  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2467MHz  
 Channel: 12

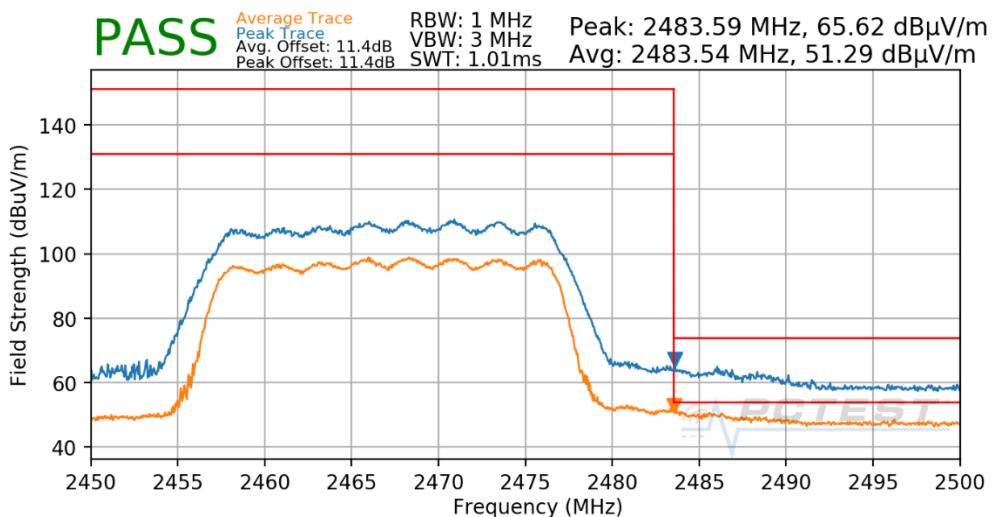

**Plot 8-41: Radiated Restricted Upper Band Edge Measurement CDD (Average & Peak – RU242)**

FCC ID: BCGA2461 IC: 579C-A2461	 <b>DATA REFERENCE REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device	Page 46 of 48

## 9.0 CONCLUSION

The spot-check data measured for variant model **FCC ID: BCGA2461 / IC: 579C-A2461** is in tolerance with reference model FCC ID: BCGA2379 / IC: 579C-A2379 per FCC/ISED Approved Data Referencing Test Plan. Additionally, Antenna 4a radiated testing has been fully conducted and results were found in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA2461 IC: 579C-A2461	PCTEST <sup>®</sup> Proud to be part of element		DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2101020006-11.BCG	Test Dates: 12/15/2020-3/18/2021	EUT Type: Tablet Device	Page 47 of 48	