



Figure 194 - Core 1 (B) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 195 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 196 - Core 1 (B) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 197 - Core 0 (A) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Figure 198 - Core 1 (B) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5180 (RU26.0)	19.920	19.740	-	-	19.740	-
5200 (RU26.0)	20.100	19.680	-	-	19.680	-
5240 (RU26.8)	20.400	19.740	-	-	19.740	-

Table 452 - 26 dB Bandwidth Results



Figure 199 - Core 0 (A) 5180 MHz (CH36) 26 dB and 99% Bandwidth

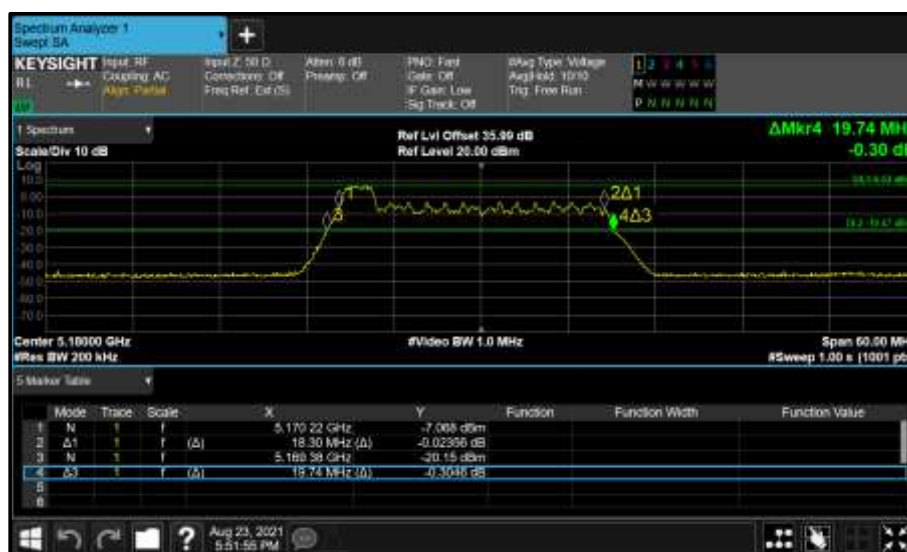


Figure 200 - Core 1 (B) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 201 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 202 - Core 1 (B) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 203 - Core 0 (A) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Figure 204 - Core 1 (B) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5180 (RU26.0)	18.420	18.300	-	-	18.300	-
5200 (RU26.0)	18.360	18.360	-	-	18.360	-
5240 (RU26.8)	18.600	18.300	-	-	18.300	-

Table 453 - 99% Bandwidth Results



Figure 205 - Core 0 (A) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 206 - Core 1 (B) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 207 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth

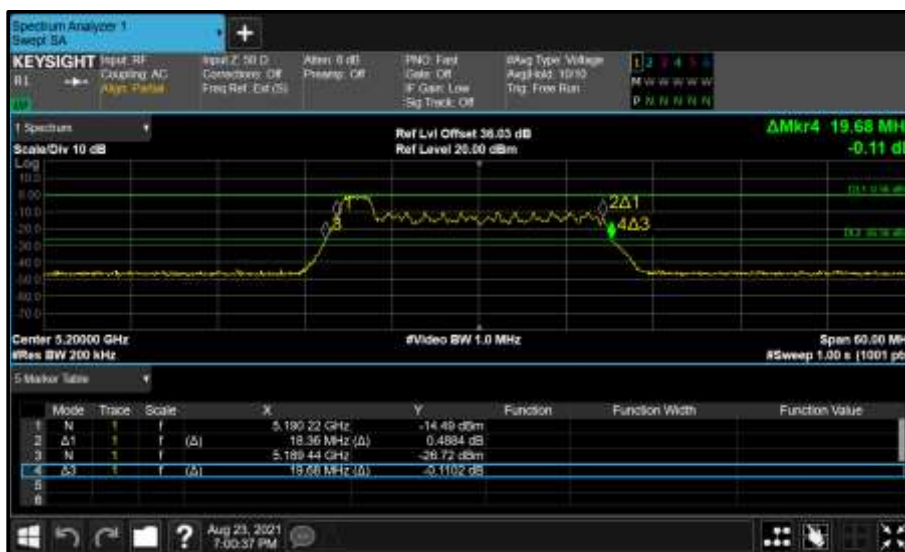


Figure 208 - Core 1 (B) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 209 - Core 0 (A) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Figure 210 - Core 1 (B) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5180 (RU52.37)	19.980	-	-	-	19.980	-
5200 (RU52.37)	20.220	-	-	-	20.220	-
5240 (RU52.40)	20.760	-	-	-	20.760	-

Table 454 - 26 dB Bandwidth Results



Figure 211 - Core 0 (A) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 212 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 213 - Core 0 (A) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5180 (RU52.37)	18.180	-	-	-	18.180	-
5200 (RU52.37)	18.240	-	-	-	18.240	-
5240 (RU52.40)	18.480	-	-	-	18.480	-

Table 455 - 99% Bandwidth Results



Figure 214 - Core 0 (A) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 215 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 216 - Core 0 (A) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCC (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5180 (RU52.37)	20.160	19.800	-	-	19.800	-
5200 (RU52.37)	20.280	19.800	-	-	19.800	-
5240 (RU52.40)	20.700	19.860	-	-	19.860	-

Table 456 - 26 dB Bandwidth Results



Figure 217 - Core 0 (A) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 218 - Core 1 (B) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 219 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 220 - Core 1 (B) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 221 - Core 0 (A) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Figure 222 - Core 1 (B) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5180 (RU52.37)	18.180	18.180	-	-	18.180	-
5200 (RU52.37)	18.240	18.180	-	-	18.180	-
5240 (RU52.40)	18.480	18.180	-	-	18.180	-

Table 457 - 99% Bandwidth Results



Figure 223 - Core 0 (A) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 224 - Core 1 (B) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 225 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 226 - Core 1 (B) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 227 - Core 0 (A) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Figure 228 - Core 1 (B) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5180 (RU52.37)	20.160	19.680	-	-	19.680	-
5200 (RU52.37)	20.220	19.740	-	-	19.740	-
5240 (RU52.40)	20.700	19.920	-	-	19.920	-

Table 458 - 26 dB Bandwidth Results



Figure 229 - Core 0 (A) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 230 - Core 1 (B) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 231 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 232 - Core 1 (B) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 233 - Core 0 (A) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Figure 234 - Core 1 (B) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5180 (RU52.37)	18.240	18.180	-	-	18.180	-
5200 (RU52.37)	18.240	18.180	-	-	18.180	-
5240 (RU52.40)	18.480	18.180	-	-	18.180	-

Table 459 - 99% Bandwidth Results



Figure 235 - Core 0 (A) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 236 - Core 1 (B) 5180 MHz (CH36) 26 dB and 99% Bandwidth




Figure 237 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 238 - Core 1 (B) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 239 - Core 0 (A) 5240 MHz (CH48) 26 dB and 99% Bandwidth





Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCC (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5180 (RU106.53)	20.640	-	-	-	20.640	-
5200 (RU106.53)	20.640	-	-	-	20.640	-
5240 (RU106.54)	21.060	-	-	-	21.060	-

Table 460 - 26 dB Bandwidth Results



Figure 241 - Core 0 (A) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 242 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 243 - Core 0 (A) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5180 (RU106.53)	18.240	-	-	-	18.240	-
5200 (RU106.53)	18.240	-	-	-	18.240	-
5240 (RU106.54)	18.480	-	-	-	18.480	-

Table 461 - 99% Bandwidth Results



Figure 244 - Core 0 (A) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 245 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 246 - Core 0 (A) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Figure 248 - Core 1 (B) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 249 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 250 - Core 1 (B) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 251 - Core 0 (A) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Figure 252 - Core 1 (B) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5180 (RU106.53)	18.240	18.120	-	-	18.120	-
5200 (RU106.53)	18.240	18.180	-	-	18.180	-
5240 (RU106.54)	18.480	18.240	-	-	18.240	-

Table 463 - 99% Bandwidth Results



Figure 253 - Core 0 (A) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 254 - Core 1 (B) 5180 MHz (CH36) 26 dB and 99% Bandwidth




Figure 255 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 256 - Core 1 (B) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 257 - Core 0 (A) 5240 MHz (CH48) 26 dB and 99% Bandwidth





Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5180 (RU106.53)	20.580	19.860	-	-	19.860	-
5200 (RU106.53)	20.640	19.980	-	-	19.980	-
5240 (RU106.54)	21.000	20.100	-	-	20.100	-

Table 464 - 26 dB Bandwidth Results



Figure 259 - Core 0 (A) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 260 - Core 1 (B) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 261 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 262 - Core 1 (B) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 263 - Core 0 (A) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Figure 264 - Core 1 (B) 5240 MHz (CH48) 26 dB and 99% Bandwidth

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Table 465 - 99% Bandwidth Results



Figure 265 - Core 0 (A) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 266 - Core 1 (B) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 267 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 268 - Core 1 (B) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 269 - Core 0 (A) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Figure 270 - Core 1 (B) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5190	51.000	-	-	-	51.000	-
5230	53.640	-	-	-	53.640	-

Table 466 - 26 dB Bandwidth Results



Figure 271 - Core 0 (A) 5190 MHz (CH38) 26 dB and 99% Bandwidth



Figure 272 - Core 0 (A) 5230 MHz (CH46) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5190	38.160	-	-	-	38.160	-
5230	38.040	-	-	-	38.040	-

Table 467 - 99% Bandwidth Results



Figure 273 - Core 0 (A) 5190 MHz (CH38) 26 dB and 99% Bandwidth



Figure 274 - Core 0 (A) 5230 MHz (CH46) 26 dB and 99% Bandwidth



Test Configuration				
Frequency Range:	5.150-5.250 GHz		Band:	U-NII-1
Limit Clause(s):			Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-			

DUT Configuration				
Mode:	802.11ax HE40 SU		Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1		DCCF (dB):	-
Antenna Configuration:	MIMO CDD		Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)		Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5190	52.800	52.800	-	-	52.800	-
5230	42.000	42.000	-	-	42.000	-

Table 468 - 26 dB Bandwidth Results



Figure 275 - Core 0 (A) 5190 MHz (CH38) 26 dB and 99% Bandwidth



Figure 276 - Core 1 (B) 5190 MHz (CH38) 26 dB and 99% Bandwidth



Figure 277 - Core 0 (A) 5230 MHz (CH46) 26 dB and 99% Bandwidth



Figure 278 - Core 1 (B) 5230 MHz (CH46) 26 dB and 99% Bandwidth

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5190	38.280	38.160	-	-	38.160	-
5230	38.040	38.040	-	-	38.040	-





Figure 280 - Core 1 (B) 5190 MHz (CH38) 26 dB and 99% Bandwidth



Figure 281 - Core 0 (A) 5230 MHz (CH46) 26 dB and 99% Bandwidth



Figure 282 - Core 1 (B) 5230 MHz (CH46) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5190	52.800	55.920	-	-	52.800	-
5230	41.880	41.880	-	-	41.880	-

Table 470 - 26 dB Bandwidth Results



Figure 283 - Core 0 (A) 5190 MHz (CH38) 26 dB and 99% Bandwidth



Figure 284 - Core 1 (B) 5190 MHz (CH38) 26 dB and 99% Bandwidth



Figure 285 - Core 0 (A) 5230 MHz (CH46) 26 dB and 99% Bandwidth



Figure 286 - Core 1 (B) 5230 MHz (CH46) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5190	38.160	38.160	-	-	38.160	-
5230	37.920	38.040	-	-	37.920	-

Table 471 - 99% Bandwidth Results



Figure 287 - Core 0 (A) 5190 MHz (CH38) 26 dB and 99% Bandwidth



Figure 288 - Core 1 (B) 5190 MHz (CH38) 26 dB and 99% Bandwidth



Figure 289 - Core 0 (A) 5230 MHz (CH46) 26 dB and 99% Bandwidth



Figure 290 - Core 1 (B) 5230 MHz (CH46) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCC (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5210	87.340	-	-	-	87.340	-

Table 472 - 26 dB Bandwidth Results



Figure 291 - Core 0 (A) 5210 MHz (CH42) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5210	77.220	-	-	-	77.220	-

Table 473 - 99% Bandwidth Results



Figure 292 - Core 0 (A) 5210 MHz (CH42) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5210	87.340	87.340	-	-	87.340	-

Table 474 - 26 dB Bandwidth Results



Figure 293 - Core 0 (A) 5210 MHz (CH42) 26 dB and 99% Bandwidth



Figure 294 - Core 1 (B) 5210 MHz (CH42) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5210	77.220	77.220	-	-	77.220	-

Table 475 - 99% Bandwidth Results



Figure 295 - Core 0 (A) 5210 MHz (CH42) 26 dB and 99% Bandwidth



Figure 296 - Core 1 (B) 5210 MHz (CH42) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5210	86.900	86.900	-	-	86.900	-

Table 476 - 26 dB Bandwidth Results



Figure 297 - Core 0 (A) 5210 MHz (CH42) 26 dB and 99% Bandwidth



Figure 298 - Core 1 (B) 5210 MHz (CH42) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5210	77.220	77.220	-	-	77.220	-

Table 477 - 99% Bandwidth Results



Figure 299 - Core 0 (A) 5210 MHz (CH42) 26 dB and 99% Bandwidth



Figure 300 - Core 1 (B) 5210 MHz (CH42) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCC (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5180	21.780	22.080	-	-	21.780	-
5200	21.060	21.000	-	-	21.000	-
5240	21.060	21.180	-	-	21.060	-

Table 478 - 26 dB Bandwidth Results



Figure 301 - Core 0 (A) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 302 - Core 1 (B) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 303 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 304 - Core 1 (B) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 305 - Core 0 (A) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Figure 306 - Core 1 (B) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5180	18.420	19.080	-	-	18.420	-
5200	18.000	18.180	-	-	18.000	-
5240	18.060	18.300	-	-	18.060	-

Table 479 - 99% Bandwidth Results



Figure 307 - Core 0 (A) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 308 - Core 1 (B) 5180 MHz (CH36) 26 dB and 99% Bandwidth

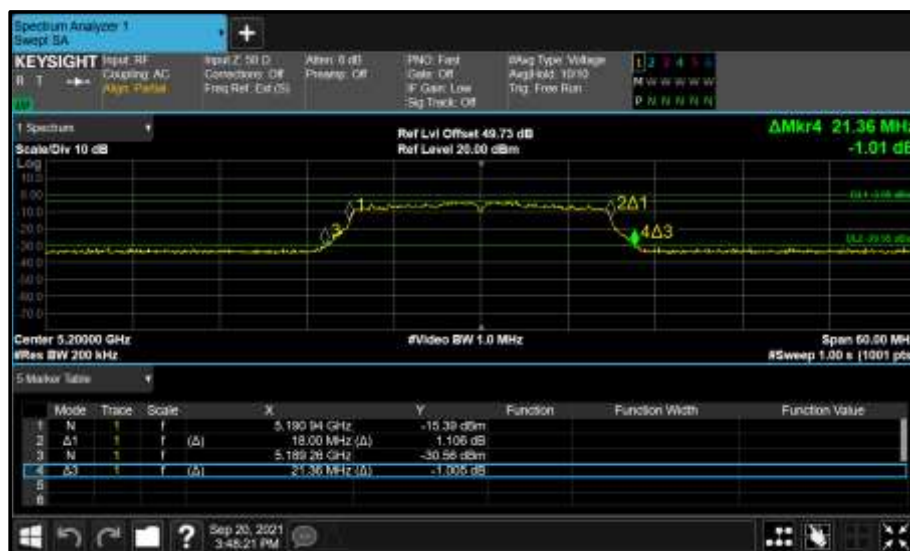



Figure 309 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 310 - Core 1 (B) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 311 - Core 0 (A) 5240 MHz (CH48) 26 dB and 99% Bandwidth





Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5190	44.040	43.680	-	-	43.680	-
5230	41.520	41.640	-	-	41.520	-

Table 480 - 26 dB Bandwidth Results



Figure 313 - Core 0 (A) 5190 MHz (CH38) 26 dB and 99% Bandwidth



Figure 314 - Core 1 (B) 5190 MHz (CH38) 26 dB and 99% Bandwidth



Figure 315 - Core 0 (A) 5230 MHz (CH46) 26 dB and 99% Bandwidth



Figure 316 - Core 1 (B) 5230 MHz (CH46) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5190	37.560	38.640	-	-	37.560	-
5230	36.960	37.320	-	-	36.960	-

Table 481 - 99% Bandwidth Results



Figure 317 - Core 0 (A) 5190 MHz (CH38) 26 dB and 99% Bandwidth



Figure 318 - Core 1 (B) 5190 MHz (CH38) 26 dB and 99% Bandwidth



Figure 319 - Core 0 (A) 5230 MHz (CH46) 26 dB and 99% Bandwidth



Figure 320 - Core 1 (B) 5230 MHz (CH46) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5210	42.360	42.360	-	-	42.360	-

Table 482 - 26 dB Bandwidth Results



Figure 321 - Core 0 (A) 5210 MHz (CH42) 26 dB and 99% Bandwidth



Figure 322 - Core 1 (B) 5210 MHz (CH42) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5210	78.240	246.400	-	-	78.240	-

Table 483 - 99% Bandwidth Results



Figure 323 - Core 0 (A) 5210 MHz (CH42) 26 dB and 99% Bandwidth



Figure 324 - Core 1 (B) 5210 MHz (CH42) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5260	-	20.760	-	-	20.760	-
5280	-	20.760	-	-	20.760	-
5320	-	21.420	-	-	21.420	-

Table 484 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5260	-	16.560	-	-	16.560	-
5280	-	16.560	-	-	16.560	-
5320	-	16.620	-	-	16.620	-

Table 485 - 99% Bandwidth Results



Figure 325 - Core 1 (B) 5260 MHz (CH52) 26 dB and 99% Bandwidth



Figure 326 - Core 1 (B) 5280 MHz (CH56) 26 dB and 99% Bandwidth



Figure 327 - Core 1 (B) 5320 MHz (CH64) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5260	-	21.120	-	-	21.120	-
5280	-	20.940	-	-	20.940	-
5320	-	21.540	-	-	21.540	-

Table 486 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5260	-	17.700	-	-	17.700	-
5280	-	17.700	-	-	17.700	-
5320	-	17.820	-	-	17.820	-

Table 487 - 99% Bandwidth Results



Figure 328 - Core 1 (B) 5260 MHz (CH52) 26 dB and 99% Bandwidth



Figure 329 - Core 1 (B) 5280 MHz (CH56) 26 dB and 99% Bandwidth



Figure 330 - Core 1 (B) 5320 MHz (CH64) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCC (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5260	21.060	20.940	-	-	20.940	-
5280	21.000	21.060	-	-	21.000	-
5320	21.600	21.720	-	-	21.600	-

Table 488 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5260	17.700	17.700	-	-	17.700	-
5280	17.700	17.700	-	-	17.700	-
5320	17.820	17.820	-	-	17.820	-

Table 489 - 99% Bandwidth Results



Figure 331 - Core 0 (A) 5260 MHz (CH52) 26 dB and 99% Bandwidth



Figure 332 - Core 1 (B) 5260 MHz (CH52) 26 dB and 99% Bandwidth



Figure 333 - Core 0 (A) 5280 MHz (CH56) 26 dB and 99% Bandwidth



Figure 334 - Core 1 (B) 5280 MHz (CH56) 26 dB and 99% Bandwidth



Figure 335 - Core 0 (A) 5320 MHz (CH64) 26 dB and 99% Bandwidth



Figure 336 - Core 1 (B) 5320 MHz (CH64) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS10	DCCC (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5260	21.000	21.000	-	-	21.000	-
5280	21.120	20.880	-	-	20.880	-
5320	21.600	22.020	-	-	21.600	-

Table 490 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5260	17.700	17.700	-	-	17.700	-
5280	17.700	17.700	-	-	17.700	-
5320	17.820	17.820	-	-	17.820	-

Table 491 - 99% Bandwidth Results



Figure 337 - Core 0 (A) 5260 MHz (CH52) 26 dB and 99% Bandwidth



Figure 338 - Core 1 (B) 5260 MHz (CH52) 26 dB and 99% Bandwidth



Figure 339 - Core 0 (A) 5280 MHz (CH56) 26 dB and 99% Bandwidth



Figure 340 - Core 1 (B) 5280 MHz (CH56) 26 dB and 99% Bandwidth



Figure 341 - Core 0 (A) 5320 MHz (CH64) 26 dB and 99% Bandwidth



Figure 342 - Core 1 (B) 5320 MHz (CH64) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5270	-	41.640	-	-	41.640	-
5310	-	43.080	-	-	43.080	-

Table 492 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5270	-	36.360	-	-	36.360	-
5310	-	36.600	-	-	36.600	-

Table 493 - 99% Bandwidth Results



Figure 343 - Core 1 (B) 5270 MHz (CH54) 26 dB and 99% Bandwidth



Figure 344 - Core 1 (B) 5310 MHz (CH62) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5270	41.500	41.400	-	-	41.400	-
5310	42.720	43.200	-	-	42.720	-



Table 494 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5270	36.300	36.240	-	-	36.240	-
5310	36.480	36.600	-	-	36.480	-

Table 495 - 99% Bandwidth Results



Figure 345 - Core 0 (A) 5270 MHz (CH54) 26 dB and 99% Bandwidth








Figure 350 - Core 1 (B) 5270 MHz (CH54) 26 dB and 99% Bandwidth



Figure 351 - Core 0 (A) 5310 MHz (CH62) 26 dB and 99% Bandwidth



Figure 352 - Core 1 (B) 5310 MHz (CH62) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5290	-	83.380	-	-	83.380	-

Table 498 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5290	-	75.460	-	-	75.460	-

Table 499 - 99% Bandwidth Results



Figure 353 - Core 1 (B) 5290 MHz (CH58) 26 dB and 99% Bandwidth

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5290	84.260	83.820	-	-	83.820	-

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5290	75.680	75.460	-	-	75.460	-

Spectrum Analyzer 1
Sweep 5A

KEYSIGHT Input: RF Input: Z, 50 Ω Input: F, 50 dB Att: 0 dB Preset: Off 1940 Fast Gels: Off 8500 Type: Voltage Avg: 400, 10/90 Trg: Free Run

1 2 3 4 5 6
M W W W W W
P N N N N N

1 Spectrum
Scale/Div 10 dB
Ref Lvl Offset 36.26 dB
Ref Level 20.00 dBm

Log
10.0
8.00
6.00
4.00
2.00
0.00
-2.00
-4.00
-6.00
-8.00
-10.00

84.26 MHz
0.71 dB

241
443

Center 5.2000 GHz
#Res BW 1.0 MHz
#Video BW 3.0 MHz
Span 220.0 MHz
#Sweep 1.00 s (1001 pts)

Marker Table

Mode	Trace	Scale	X	Y	Function	Function Width	Function Value
1	N	f	5.202 16 GHz	-1.667 dBm			
2	Δ1	f	76.68 MHz (Δ)	-0.3232 dB			
3	N	f	5.247 98 GHz	-21.72 dBm			
4	Δ3	f	84.26 MHz (Δ)	0.7002 dB			
5							
6							

Page 469 of 935



Figure 355 - Core 1 (B) 5290 MHz (CH58) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5290	84.260	84.480	-	-	84.260	-


Table 502 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5290	75.680	75.460	-	-	75.460	-

Table 503 - 99% Bandwidth Results



Figure 356 - Core 0 (A) 5290 MHz (CH58) 26 dB and 99% Bandwidth





Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5260	-	21.300	-	-	21.300	-
5280	-	21.240	-	-	21.240	-
5320	-	26.160	-	-	26.160	-

Table 504 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5260	-	19.020	-	-	19.020	-
5280	-	19.020	-	-	19.020	-
5320	-	19.080	-	-	19.080	-

Table 505 - 99% Bandwidth Results



Figure 358 - Core 1 (B) 5260 MHz (CH52) 26 dB and 99% Bandwidth



Figure 359 - Core 1 (B) 5280 MHz (CH56) 26 dB and 99% Bandwidth



Figure 360 - Core 1 (B) 5320 MHz (CH64) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCC (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5260	21.180	21.360	-	-	21.180	-
5280	21.420	21.360	-	-	21.360	-
5320	26.100	22.560	-	-	22.560	-

Table 506 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5260	19.020	19.020	-	-	19.020	-
5280	19.020	19.020	-	-	19.020	-
5320	19.080	19.080	-	-	19.080	-

Table 507 - 99% Bandwidth Results



Figure 361 - Core 0 (A) 5260 MHz (CH52) 26 dB and 99% Bandwidth



Figure 362 - Core 1 (B) 5260 MHz (CH52) 26 dB and 99% Bandwidth



Figure 363 - Core 0 (A) 5280 MHz (CH56) 26 dB and 99% Bandwidth



Figure 364 - Core 1 (B) 5280 MHz (CH56) 26 dB and 99% Bandwidth



Figure 365 - Core 0 (A) 5320 MHz (CH64) 26 dB and 99% Bandwidth



Figure 366 - Core 1 (B) 5320 MHz (CH64) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCC (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5260	21.180	21.300	-	-	21.180	-
5280	21.420	21.300	-	-	21.300	-
5320	24.360	26.160	-	-	24.360	-

Table 508 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5260	19.020	19.020	-	-	19.020	-
5280	19.020	19.020	-	-	19.020	-
5320	19.080	19.140	-	-	19.080	-

Table 509 - 99% Bandwidth Results



Figure 367 - Core 0 (A) 5260 MHz (CH52) 26 dB and 99% Bandwidth







Figure 370 - Core 1 (B) 5280 MHz (CH56) 26 dB and 99% Bandwidth



Figure 371 - Core 0 (A) 5320 MHz (CH64) 26 dB and 99% Bandwidth



Figure 372 - Core 1 (B) 5320 MHz (CH64) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5260 (RU52.37)	-	20.160	-	-	20.160	-
5280 (RU52.37)	-	20.340	-	-	20.340	-
5320 (RU52.40)	-	20.640	-	-	20.640	-

Table 510 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5260 (RU52.37)	-	18.180	-	-	18.180	-
5280 (RU52.37)	-	18.180	-	-	18.180	-
5320 (RU52.40)	-	18.480	-	-	18.480	-

Table 511 - 99% Bandwidth Results



Figure 373 - Core 1 (B) 5260 MHz (CH52) 26 dB and 99% Bandwidth



Figure 374 - Core 1 (B) 5280 MHz (CH56) 26 dB and 99% Bandwidth



Figure 375 - Core 1 (B) 5320 MHz (CH64) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCC (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5260 (RU52.37)	20.160	19.920	-	-	19.920	-
5280 (RU52.37)	20.100	19.800	-	-	19.800	-
5320 (RU52.40)	20.820	19.740	-	-	19.740	-

Table 512 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5260 (RU52.37)	18.240	18.180	-	-	18.180	-
5280 (RU52.37)	18.240	18.180	-	-	18.180	-
5320 (RU52.40)	18.480	18.240	-	-	18.240	-

Table 513 - 99% Bandwidth Results



Figure 376 - Core 0 (A) 5260 MHz (CH52) 26 dB and 99% Bandwidth



Figure 377 - Core 1 (B) 5260 MHz (CH52) 26 dB and 99% Bandwidth



Figure 378 - Core 0 (A) 5280 MHz (CH56) 26 dB and 99% Bandwidth



Figure 379 - Core 1 (B) 5280 MHz (CH56) 26 dB and 99% Bandwidth



Figure 380 - Core 0 (A) 5320 MHz (CH64) 26 dB and 99% Bandwidth



Figure 381 - Core 1 (B) 5320 MHz (CH64) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCC (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5260 (RU52.37)	20.280	19.740	-	-	19.740	-
5280 (RU52.37)	20.340	19.680	-	-	19.680	-
5320 (RU52.40)	20.640	19.800	-	-	19.800	-

Table 514 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5260 (RU52.37)	18.180	18.180	-	-	18.180	-
5280 (RU52.37)	18.240	18.180	-	-	18.180	-
5320 (RU52.40)	18.480	18.180	-	-	18.180	-

Table 515 - 99% Bandwidth Results



Figure 382 - Core 0 (A) 5260 MHz (CH52) 26 dB and 99% Bandwidth



Figure 383 - Core 1 (B) 5260 MHz (CH52) 26 dB and 99% Bandwidth



Figure 384 - Core 0 (A) 5280 MHz (CH56) 26 dB and 99% Bandwidth



Figure 385 - Core 1 (B) 5280 MHz (CH56) 26 dB and 99% Bandwidth



Figure 386 - Core 0 (A) 5320 MHz (CH64) 26 dB and 99% Bandwidth



Figure 387 - Core 1 (B) 5320 MHz (CH64) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5260 (RU106.53)	-	20.640	-	-	20.640	-
5280 (RU106.53)	-	20.640	-	-	20.640	-
5320 (RU106.54)	-	21.000	-	-	21.000	-

Table 516 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5260 (RU106.53)	-	18.240	-	-	18.240	-
5280 (RU106.53)	-	18.240	-	-	18.240	-
5320 (RU106.54)	-	18.480	-	-	18.480	-

Table 517 - 99% Bandwidth Results



Figure 388 - Core 1 (B) 5260 MHz (CH52) 26 dB and 99% Bandwidth



Figure 389 - Core 1 (B) 5280 MHz (CH56) 26 dB and 99% Bandwidth



Figure 390 - Core 1 (B) 5320 MHz (CH64) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5260 (RU106.53)	20.460	20.160	-	-	20.160	-
5280 (RU106.53)	20.580	19.980	-	-	19.980	-
5320 (RU106.54)	21.060	20.220	-	-	20.220	-

Table 518 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5260 (RU106.53)	18.180	18.180	-	-	18.180	-
5280 (RU106.53)	18.240	18.180	-	-	18.180	-
5320 (RU106.54)	18.480	18.240	-	-	18.240	-

Table 519 - 99% Bandwidth Results



Figure 391 - Core 0 (A) 5260 MHz (CH52) 26 dB and 99% Bandwidth



Figure 392 - Core 1 (B) 5260 MHz (CH52) 26 dB and 99% Bandwidth



Figure 393 - Core 0 (A) 5280 MHz (CH56) 26 dB and 99% Bandwidth



Figure 394 - Core 1 (B) 5280 MHz (CH56) 26 dB and 99% Bandwidth



Figure 395 - Core 0 (A) 5320 MHz (CH64) 26 dB and 99% Bandwidth



Figure 396 - Core 1 (B) 5320 MHz (CH64) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5260 (RU106.53)	20.760	19.860	-	-	19.860	-
5280 (RU106.53)	20.580	19.920	-	-	19.920	-
5320 (RU106.54)	21.000	19.920	-	-	19.920	-

Table 520 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5260 (RU106.53)	18.180	18.120	-	-	18.120	-
5280 (RU106.53)	18.240	18.180	-	-	18.180	-
5320 (RU106.54)	18.480	18.180	-	-	18.180	-

Table 521 - 99% Bandwidth Results



Figure 397 - Core 0 (A) 5260 MHz (CH52) 26 dB and 99% Bandwidth



Figure 398 - Core 1 (B) 5260 MHz (CH52) 26 dB and 99% Bandwidth



Figure 399 - Core 0 (A) 5280 MHz (CH56) 26 dB and 99% Bandwidth



Figure 400 - Core 1 (B) 5280 MHz (CH56) 26 dB and 99% Bandwidth



Figure 401 - Core 0 (A) 5320 MHz (CH64) 26 dB and 99% Bandwidth



Figure 402 - Core 1 (B) 5320 MHz (CH64) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5270	-	41.880	-	-	41.880	-
5310	-	51.120	-	-	51.120	-

Table 522 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5270	-	38.040	-	-	38.040	-
5310	-	38.160	-	-	38.160	-

Table 523 - 99% Bandwidth Results



Figure 403 - Core 1 (B) 5270 MHz (CH54) 26 dB and 99% Bandwidth



Figure 404 - Core 1 (B) 5310 MHz (CH62) 26 dB and 99% Bandwidth

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5270	41.880	42.000	-	-	41.880	-
5310	52.920	52.800	-	-	52.800	-

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5270	37.920	37.920	-	-	37.920	-
5310	38.160	38.160	-	-	38.160	-





Figure 406 - Core 1 (B) 5270 MHz (CH54) 26 dB and 99% Bandwidth



Figure 407 - Core 0 (A) 5310 MHz (CH62) 26 dB and 99% Bandwidth



Figure 408 - Core 1 (B) 5310 MHz (CH62) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5270	41.760	42.000	-	-	41.760	-
5310	52.920	52.800	-	-	52.800	-

Table 526 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5270	38.040	37.920	-	-	37.920	-
5310	38.280	38.160	-	-	38.160	-

Table 527 - 99% Bandwidth Results




Figure 409 - Core 0 (A) 5270 MHz (CH54) 26 dB and 99% Bandwidth



Figure 410 - Core 1 (B) 5270 MHz (CH54) 26 dB and 99% Bandwidth



Figure 411 - Core 0 (A) 5310 MHz (CH62) 26 dB and 99% Bandwidth



DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5290	87.560	86.460	-	-	86.460	-

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5290	77.440	77.220	-	-	77.220	-

Spectrum Analyzer 1
Sweep 5A

KEYSIGHT Input: RF Input Z: 50 Ω Att: 6 dB 1940 Fast Sig Type: Voltage
Coupling: AC Corrections: Off Gains: Off Appl: 10/10
Align: Parallel Freq Ref: Cal On Preset: Off IF Gain: Low Trg: Free Run
Sg Track: Off

1 2 3 4 5
M W W W W W
D N N N N N

1 Spectrum
Scale/Div 10 dB
Ref Lvl Offset 36.26 dB
Ref Level 20.00 dBm
Log
10.0
8.00
6.00
4.00
2.00
0.00
-2.00
-4.00
-6.00
-8.00
-10.0
-12.0
-14.0
-16.0
-18.0
-20.0
-22.0
-24.0
-26.0
-28.0
-30.0
-32.0
-34.0
-36.0
-38.0
-40.0
-42.0
-44.0
-46.0
-48.0
-50.0
-52.0
-54.0
-56.0
-58.0
-60.0
-62.0
-64.0
-66.0
-68.0
-70.0
F0.1 2000 MHz
1
20
40
60
80
100
120
140
160
180
200
220
240
260
280
300
320
340
360
380
400
420
440
460
480
500
520
540
560
580
600
620
640
660
680
700
720
740
760
780
800
820
840
860
880
900
920
940
960
980
1000
1020
1040
1060
1080
1100
1120
1140
1160
1180
1200
1220
1240
1260
1280
1300
1320
1340
1360
1380
1400
1420
1440
1460
1480
1500
1520
1540
1560
1580
1600
1620
1640
1660
1680
1700
1720
1740
1760
1780
1800
1820
1840
1860
1880
1900
1920
1940
1960
1980
2000
2020
2040
2060
2080
2100
2120
2140
2160
2180
2200
2220
2240
2260
2280
2300
2320
2340
2360
2380
2400
2420
2440
2460
2480
2500
2520
2540
2560
2580
2600
2620
2640
2660
2680
2700
2720
2740
2760
2780
2800
2820
2840
2860
2880
2900
2920
2940
2960
2980
3000
3020
3040
3060
3080
3100
3120
3140
3160
3180
3200
3220
3240
3260
3280
3300
3320
3340
3360
3380
3400
3420
3440
3460
3480
3500
3520
3540
3560
3580
3600
3620
3640
3660
3680
3700
3720
3740
3760
3780
3800
3820
3840
3860
3880
3900
3920
3940
3960
3980
4000
4020
4040
4060
4080
4100
4120
4140
4160
4180
4200
4220
4240
4260
4280
4300
4320
4340
4360
4380
4400
4420
4440
4460
4480
4500
4520
4540
4560
4580
4600
4620
4640
4660
4680
4700
4720
4740
4760
4780
4800
4820
4840
4860
4880
4900
4920
4940
4960
4980
5000
5020
5040
5060
5080
5100
5120
5140
5160
5180
5200
5220
5240
5260
5280
5300
5320
5340
5360
5380
5400
5420
5440
5460
5480
5500
5520
5540
5560
5580
5600
5620
5640
5660
5680
5700
5720
5740
5760
5780
5800
5820
5840
5860
5880
5900
5920
5940
5960
5980
6000
6020
6040
6060
6080
6100
6120
6140
6160
6180
6200
6220
6240
6260
6280
6300
6320
6340
6360
6380
6400
6420
6440
6460
6480
6500
6520
6540
6560
6580
6600
6620
6640
6660
6680
6700
6720
6740
6760
6780
6800
6820
6840
6860
6880
6900
6920
6940
6960
6980
7000
7020
7040
7060
7080
7100
7120
7140
7160
7180
7200
7220
7240
7260
7280
7300
7320
7340
7360
7380
7400
7420
7440
7460
7480
7500
7520
7540
7560
7580
7600
7620
7640
7660
7680
7700
7720
7740
7760
7780
7800
7820
7840
7860
7880
7900
7920
7940
7960
7980
8000
8020
8040
8060
8080
8100
8120
8140
8160
8180
8200
8220
8240
8260
8280
8300
8320
8340
8360
8380
8400
8420
8440
8460
8480
8500
8520
8540
8560
8580
8600
8620
8640
8660
8680
8700
8720
8740
8760
8780
8800
8820
8840
8860
8880
8900
8920
8940
8960
8980
9000
9020
9040
9060
9080
9100
9120
9140
9160
9180
9200
9220
9240
9260
9280
9300
9320
9340
9360
9380
9400
9420
9440
9460
9480
9500
9520
9540
9560
9580
9600
9620
9640
9660
9680
9700
9720
9740
9760
9780
9800
9820
9840
9860
9880
9900
9920
9940
9960
9980
10000
10020
10040
10060
10080
10100
10120
10140
10160
10180
10200
10220
10240
10260
10280
10300
10320
10340
10360
10380
10400
10420
10440
10460
10480
10500
10520
10540
10560
10580
10600
10620
10640
10660
10680
10700
10720
10740
10760
10780
10800
10820
10840
10860
10880
10900
10920
10940
10960
10980
11000
11020
11040
11060
11080
11100
11120
11140
11160
11180
11200
11220
11240
11260
11280
11300
11320
11340
11360
11380
11400
11420
11440
11460
11480
11500
11520
11540
11560
11580
11600
11620
11640
11660
11680
11700
11720
11740
11760
11

Page 512 of 935



Figure 415 - Core 1 (B) 5290 MHz (CH58) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5290	85.800	86.460	-	-	85.800	-

Table 532 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5290	77.440	77.220	-	-	77.220	-

Table 533 - 99% Bandwidth Results



Figure 416 - Core 0 (A) 5290 MHz (CH58) 26 dB and 99% Bandwidth



Figure 417 - Core 1 (B) 5290 MHz (CH58) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCC (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5260	21.000	20.880	-	-	20.880	-
5280	20.820	21.000	-	-	20.820	-
5320	21.840	21.840	-	-	21.840	-

Table 534 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5260	17.700	17.760	-	-	17.700	-
5280	17.700	17.760	-	-	17.700	-
5320	17.820	17.820	-	-	17.820	-

Table 535 - 99% Bandwidth Results



Figure 418 - Core 0 (A) 5260 MHz (CH52) 26 dB and 99% Bandwidth



Figure 419 - Core 1 (B) 5260 MHz (CH52) 26 dB and 99% Bandwidth



Figure 420 - Core 0 (A) 5280 MHz (CH56) 26 dB and 99% Bandwidth







Figure 423 - Core 1 (B) 5320 MHz (CH64) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5270	41.280	41.700	-	-	41.280	-
5310	48.000	45.360	-	-	45.360	-

Table 536 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5270	36.360	36.400	-	-	36.360	-
5310	36.720	36.840	-	-	36.720	-

Table 537 - 99% Bandwidth Results



Figure 424 - Core 0 (A) 5270 MHz (CH54) 26 dB and 99% Bandwidth



Figure 425 - Core 1 (B) 5270 MHz (CH54) 26 dB and 99% Bandwidth



Figure 426 - Core 0 (A) 5310 MHz (CH62) 26 dB and 99% Bandwidth



Figure 427 - Core 1 (B) 5310 MHz (CH62) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5290	88.000	89.760	-	-	88.000	-

Table 538 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5290	76.340	76.780	-	-	76.340	-

Table 539 - 99% Bandwidth Results



Figure 428 - Core 0 (A) 5290 MHz (CH58) 26 dB and 99% Bandwidth



Figure 429 - Core 1 (B) 5290 MHz (CH58) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5500	-	21.360	-	-	21.360	-
5580	-	20.820	-	-	20.820	-
5700	-	21.660	-	-	21.660	-
5720	-	15.380	-	-	15.380	-

Table 540 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5500	-	16.620	-	-	16.620	-
5580	-	16.560	-	-	16.560	-
5700	-	16.680	-	-	16.680	-
5720	-	13.100	-	-	13.100	-

Table 541 - 99% Bandwidth Results



Figure 430 - Core 1 (B) 5500 MHz (CH100) 26 dB and 99% Bandwidth



Figure 431 - Core 1 (B) 5580 MHz (CH116) 26 dB and 99% Bandwidth



Figure 432 - Core 1 (B) 5700 MHz (CH140) 26 dB and 99% Bandwidth



Figure 433 - Core 1 (B) 5720 MHz (CH144) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5500	-	21.840	-	-	21.840	-
5580	-	21.060	-	-	21.060	-
5700	-	22.860	-	-	22.860	-
5720	-	15.560	-	-	15.560	-

Table 542 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5500	-	17.820	-	-	17.820	-
5580	-	17.700	-	-	17.700	-
5700	-	17.880	-	-	17.880	-
5720	-	13.700	-	-	13.700	-

Table 543 - 99% Bandwidth Results



Figure 434 - Core 1 (B) 5500 MHz (CH100) 26 dB and 99% Bandwidth



Figure 435 - Core 1 (B) 5580 MHz (CH116) 26 dB and 99% Bandwidth



Figure 436 - Core 1 (B) 5700 MHz (CH140) 26 dB and 99% Bandwidth



Figure 437 - Core 1 (B) 5720 MHz (CH144) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5500	21.720	21.600	-	-	21.600	-
5580	21.000	21.000	-	-	21.000	-
5700	22.740	21.900	-	-	21.900	-
5720	15.440	15.500	-	-	15.440	-

Table 544 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5500	17.820	17.820	-	-	17.820	-
5580	17.700	17.700	-	-	17.700	-
5700	17.760	17.760	-	-	17.760	-
5720	13.700	13.700	-	-	13.700	-

Table 545 - 99% Bandwidth Results