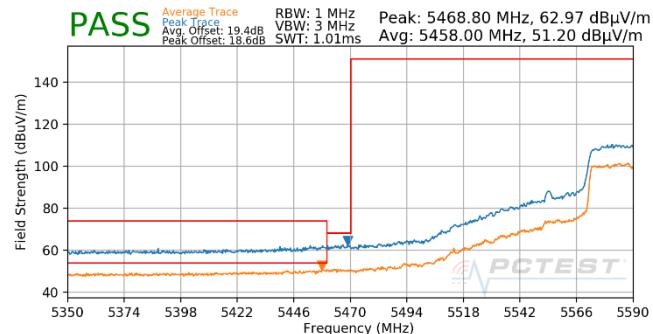
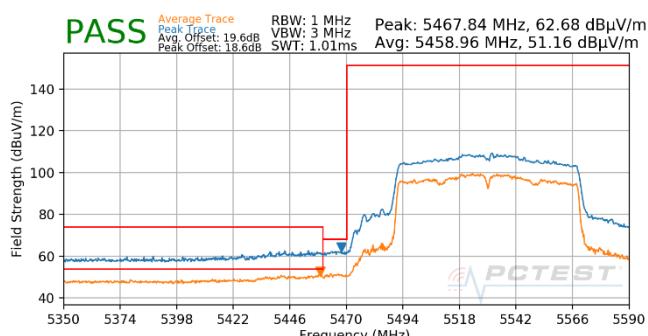
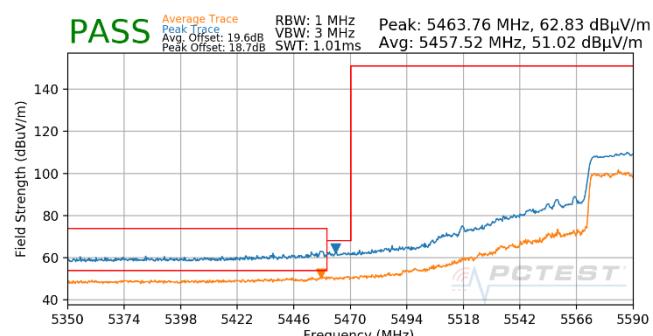
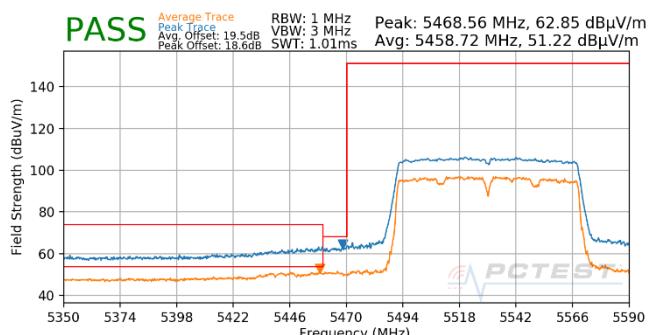
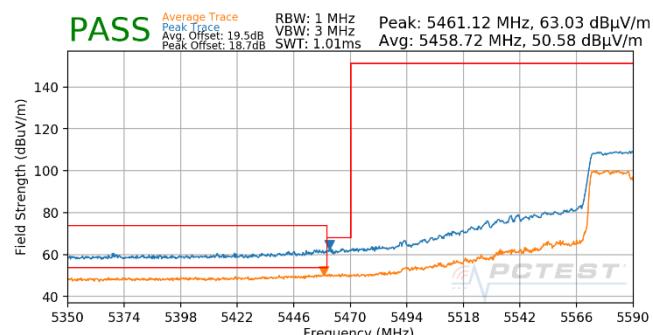
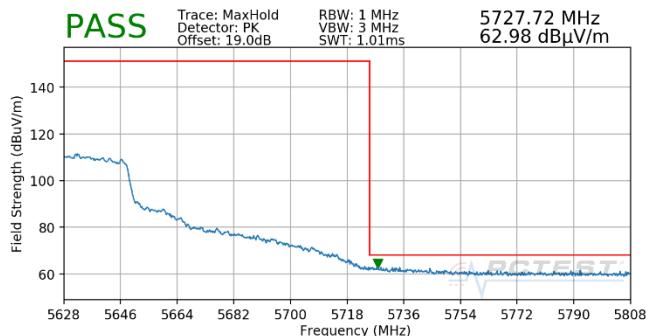
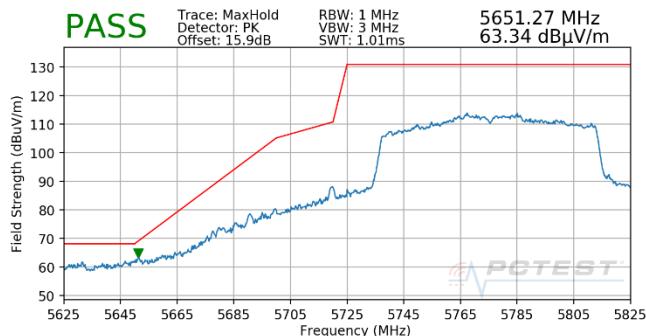

**Plot 7-1065. CDD (Pk & Avg, Ch.106, 802.11ac, MCS2)**

**Plot 7-1068. (FCC Only) CDD (Pk & Avg, Ch.122, 802.11ac, MCS2)**

**Plot 7-1066. CDD (Pk & Avg, Ch.106, 802.11ac, MCS3)**

**Plot 7-1069. (FCC Only) CDD (Pk & Avg, Ch.122, 802.11ac, MCS3)**

**Plot 7-1067. CDD (Pk & Avg, Ch.106, 802.11ac, MCS5)**

**Plot 7-1070. (FCC Only) CDD (Pk & Avg, Ch.122, 802.11ac, MCS5)**


FCC ID: BCGA2567 IC: 579C-A2567	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C2106080048-07.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device	Page 333 of 351




Plot 7-1071. (FCC Only) CDD (Pk, Ch.122, 802.11ac, MCS2)




Plot 7-1074. CDD (Pk, Ch.155, 802.11ac, MCS2)

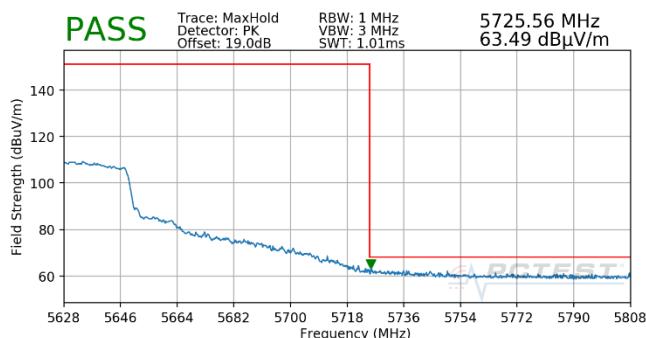


Plot 7-1072. (FCC Only) CDD (Pk, Ch.122, 802.11ac, MCS3)

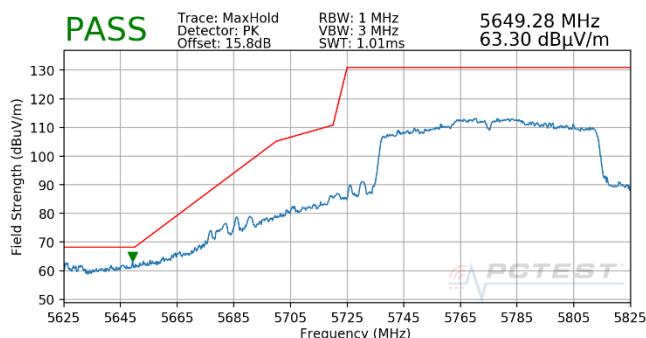

Plot 7-1075. CDD (Pk, Ch.155, 802.11ac, MCS3)

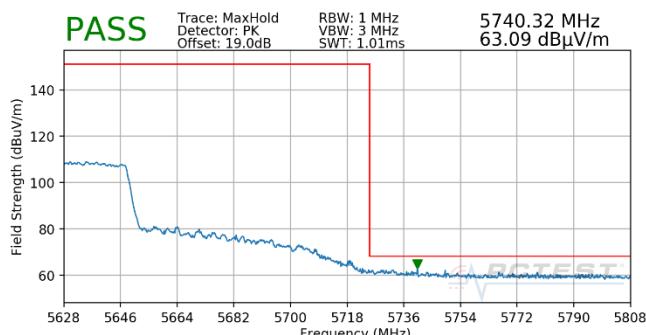


Plot 7-1073. (FCC Only) CDD (Pk, Ch.122, 802.11ac, MCS5)

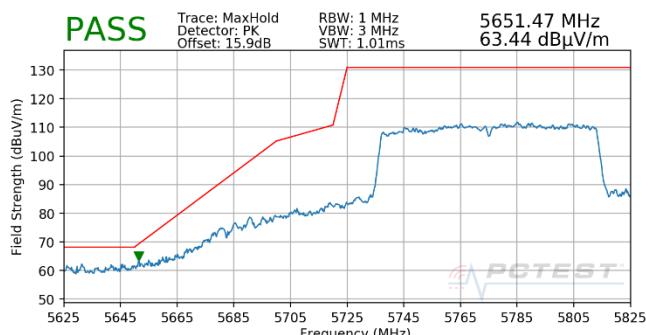


Plot 7-1076. CDD (Pk, Ch.155, 802.11ac, MCS5)


FCC ID: BCGA2567 IC: 579C-A2567	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080048-07.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device	Page 334 of 351

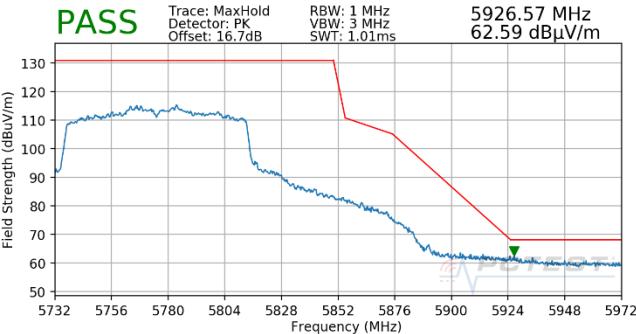

Plot 7-1077. CDD (Pk, Ch.155, 802.11ac, MCS2)

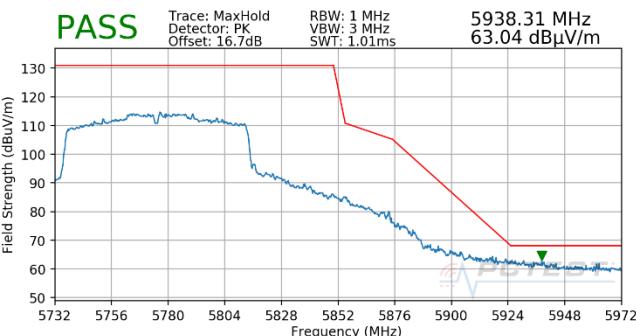


Plot 7-1078. CDD (Pk, Ch.155, 802.11ac, MCS3)

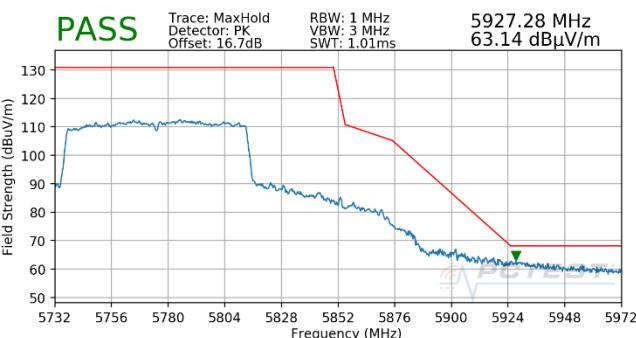


Plot 7-1079. CDD (Pk, Ch.155, 802.11ac, MCS5)


FCC ID: BCGA2567 IC: 579C-A2567	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1C2106080048-07.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device	Page 335 of 351	

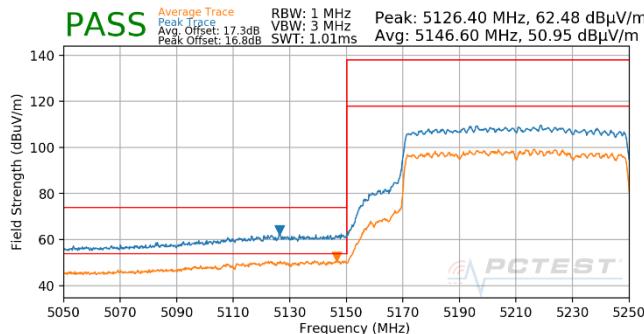


Plot 7-1080. CDD (Pk & Avg, Ch.42, 802.11ax(SU), MCS2)

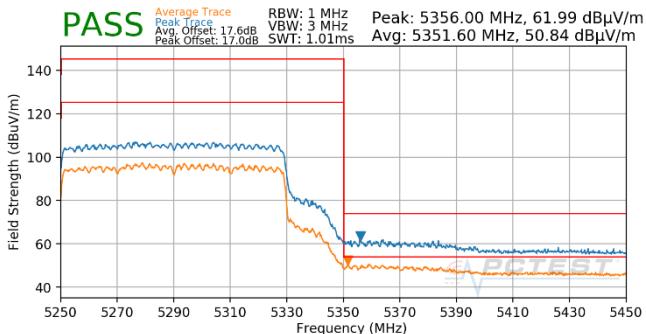


Plot 7-1083. CDD (Pk & Avg, Ch.58, 802.11ax(SU), MCS2)

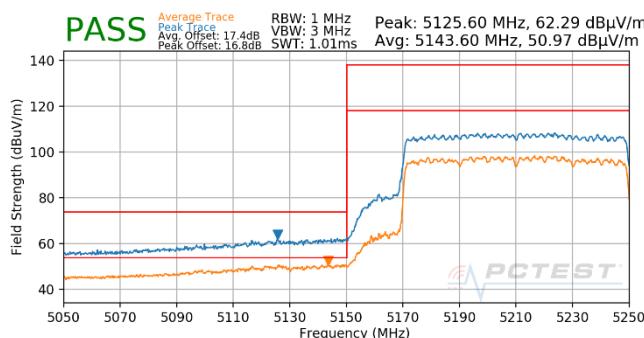


Plot 7-1081. CDD (Pk & Avg, Ch.42, 802.11ax(SU), MCS3)

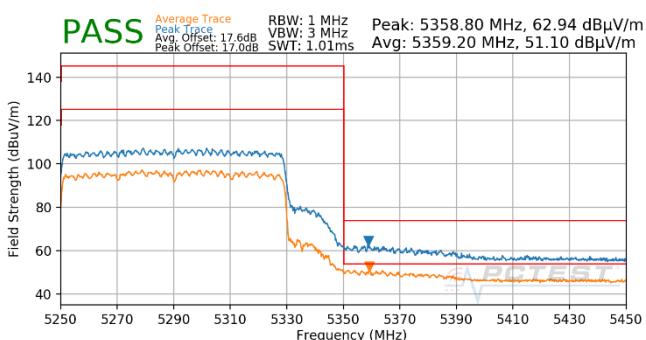

Plot 7-1084. CDD (Pk & Avg, Ch.58, 802.11ax(SU), MCS3)

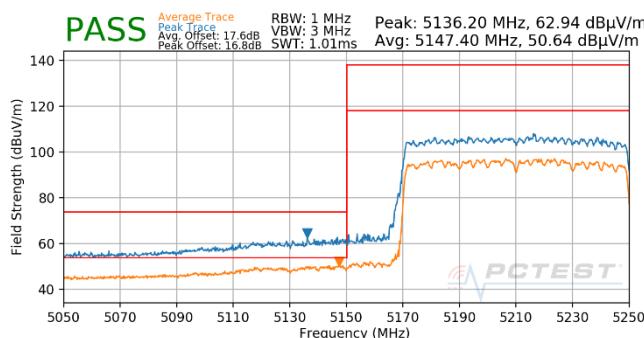


Plot 7-1082. CDD (Pk & Avg, Ch.42, 802.11ax(SU), MCS5)

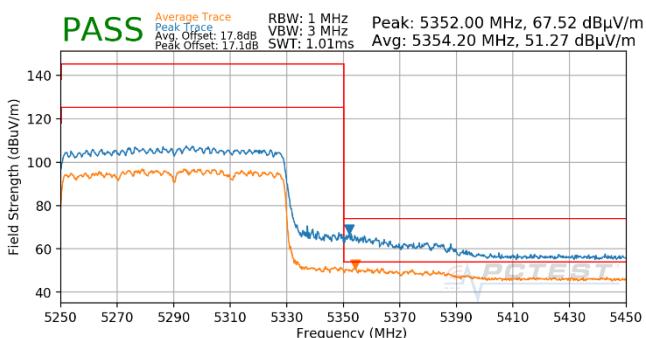


Plot 7-1085. CDD (Pk & Avg, Ch.58, 802.11ax(SU), MCS5)


FCC ID: BCGA2567 IC: 579C-A2567	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080048-07.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device	Page 336 of 351

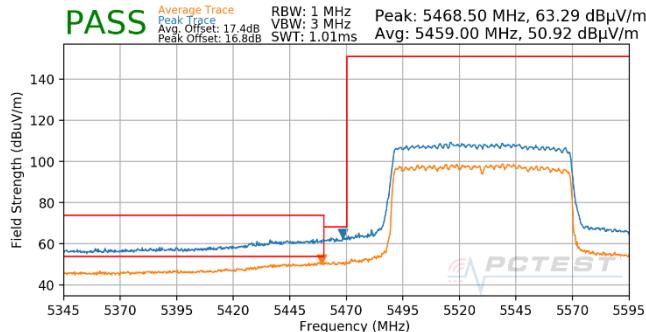


Plot 7-1086. CDD (Pk & Avg, Ch.106, 802.11ax(SU), MCS2)

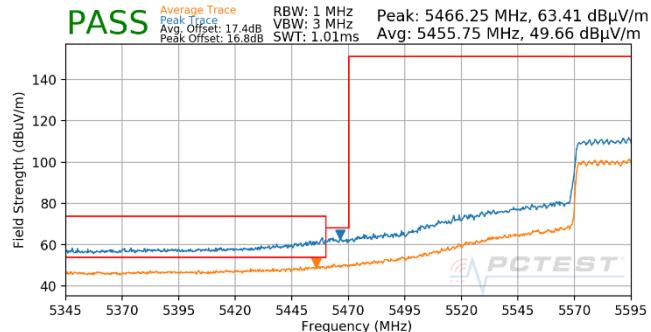


Plot 7-1089. (FCC Only) CDD (Pk & Avg, Ch.122, 802.11ax(SU), MCS2)

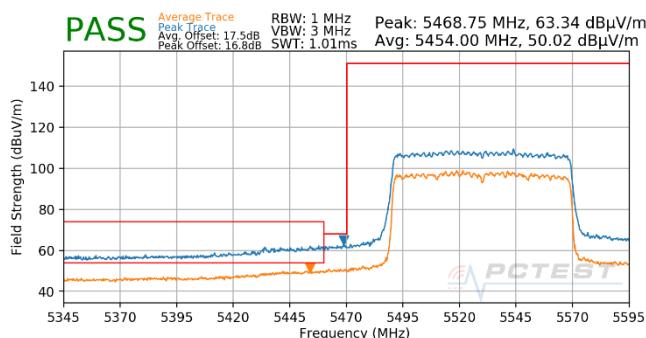


Plot 7-1087. CDD (Pk & Avg, Ch.106, 802.11ax(SU), MCS3)

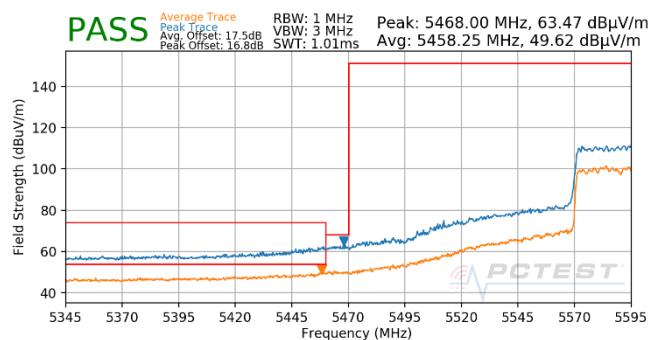

Plot 7-1090. (FCC Only) CDD (Pk & Avg, Ch.122, 802.11ax(SU), MCS3)

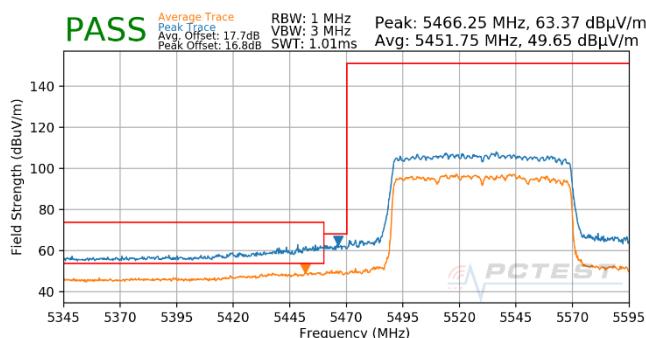


Plot 7-1088. CDD (Pk & Avg, Ch.106, 802.11ax(SU), MCS5)

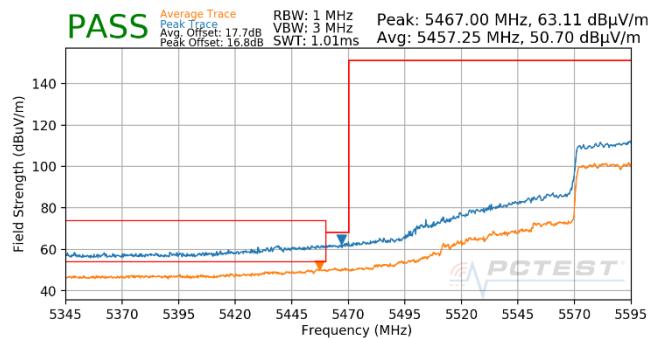


Plot 7-1091. (FCC Only) CDD (Pk & Avg, Ch.122, 802.11ax(SU), MCS5)


FCC ID: BCGA2567 IC: 579C-A2567	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080048-07.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device	Page 337 of 351

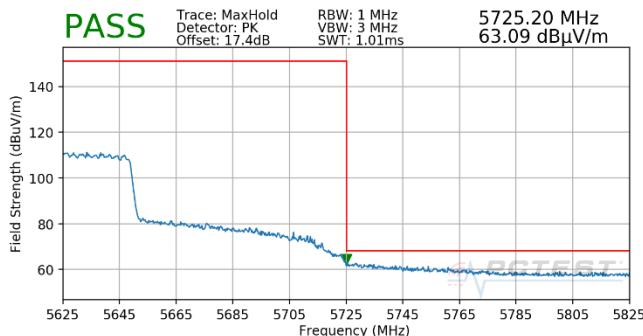


Plot 7-1092. (FCC Only) CDD (Pk, Ch.122, 802.11ax(SU), MCS2)

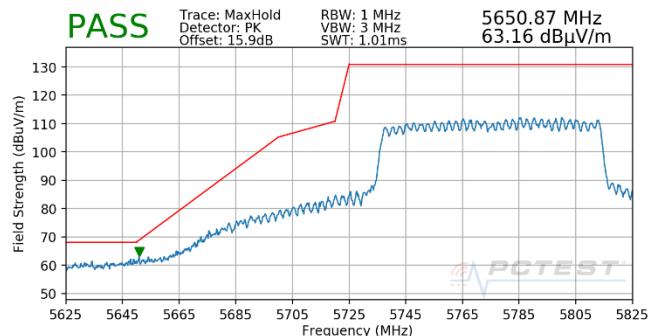


Plot 7-1095. CDD (Pk, Ch.155, 802.11ax(SU), MCS2)

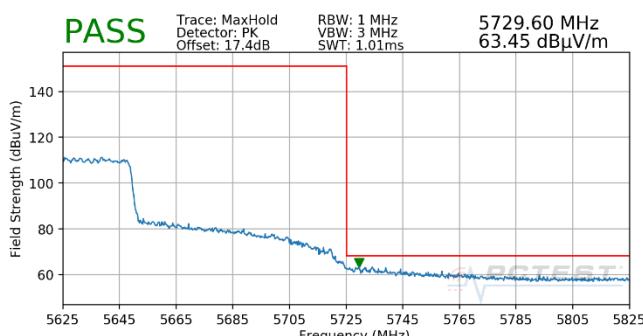


Plot 7-1093. (FCC Only) CDD (Pk, Ch.122, 802.11ax(SU), MCS3)

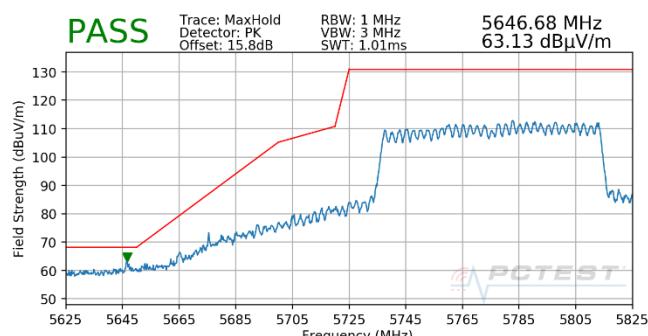

Plot 7-1096. CDD (Pk, Ch.155, 802.11ax(SU), MCS3)

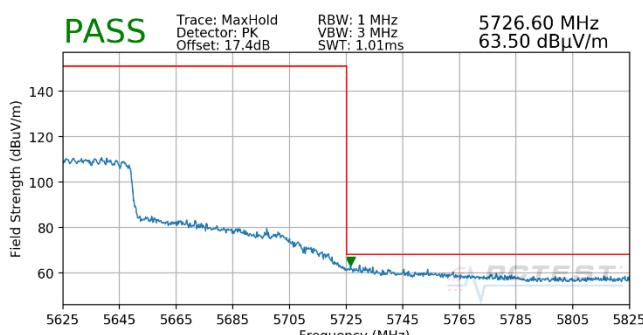


Plot 7-1094. (FCC Only) CDD (Pk, Ch.122, 802.11ax(SU), MCS5)

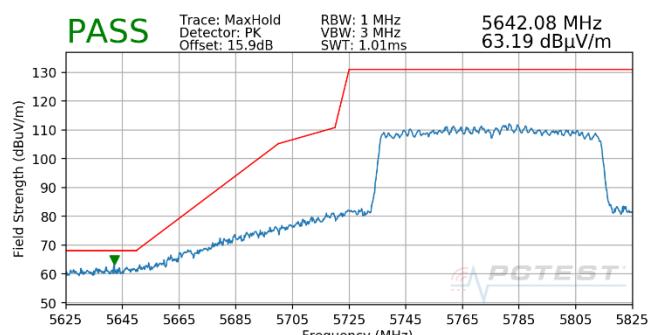


Plot 7-1097. CDD (Pk, Ch.155, 802.11ax(SU), MCS5)


FCC ID: BCGA2567 IC: 579C-A2567	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080048-07.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device	Page 338 of 351

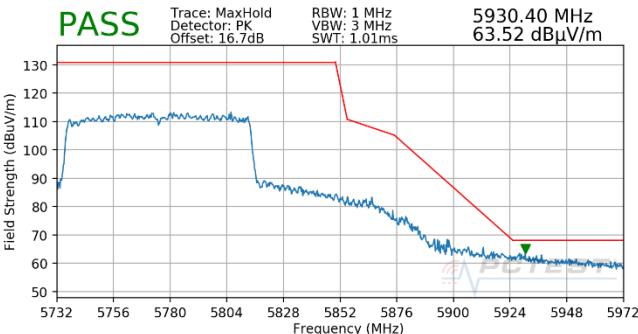

**Plot 7-1098. CDD (Pk, Ch.155, 802.11ax(SU), MCS2)**

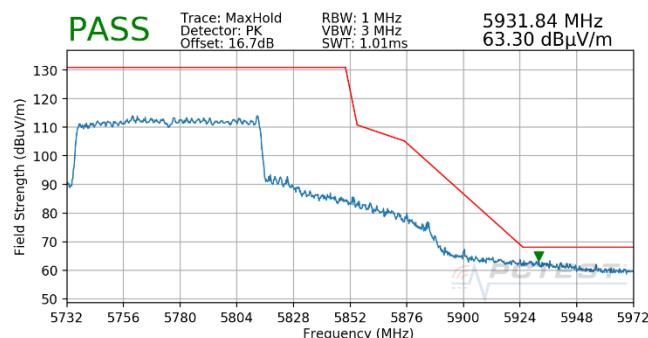

**Plot 7-1099. CDD (Pk, Ch.155, 802.11ax(SU), MCS3)**

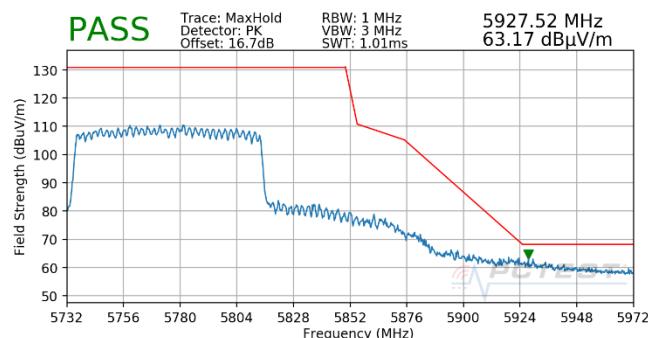

**Plot 7-1100. CDD (Pk, Ch.155, 802.11ax(SU), MCS5)**

FCC ID: BCGA2567 IC: 579C-A2567	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080048-07.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device	Page 339 of 351

## 7.7 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-192 per Section 15.209 and RSS-Gen (8.9).***

Frequency	Field Strength [ $\mu$ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-192. Radiated Limits

### Test Procedures Used

ANSI C63.10-2013

### Test Settings

#### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


#### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = quasi-peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


FCC ID: BCGA2567 IC: 579C-A2567	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080048-07.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device	Page 340 of 351

## Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

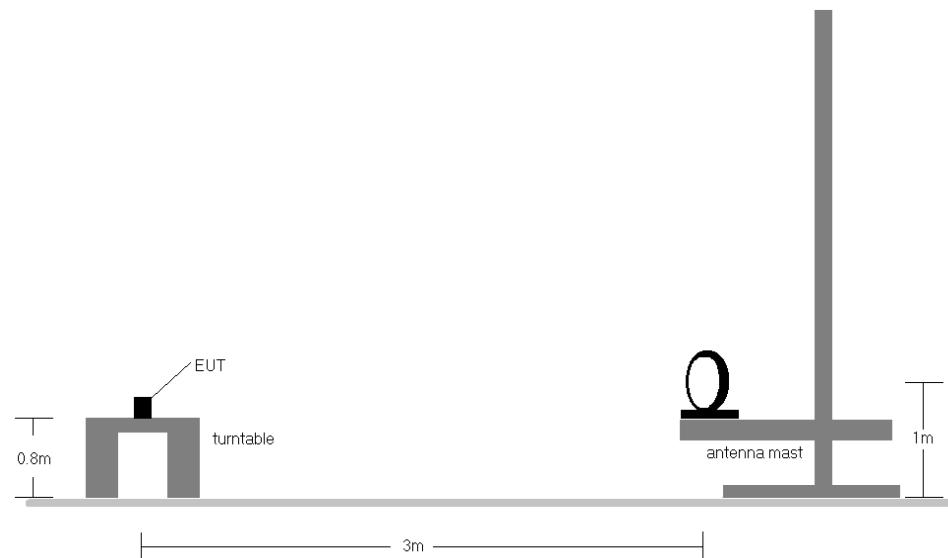

**Figure 7-6. Radiated Test Setup < 30MHz**

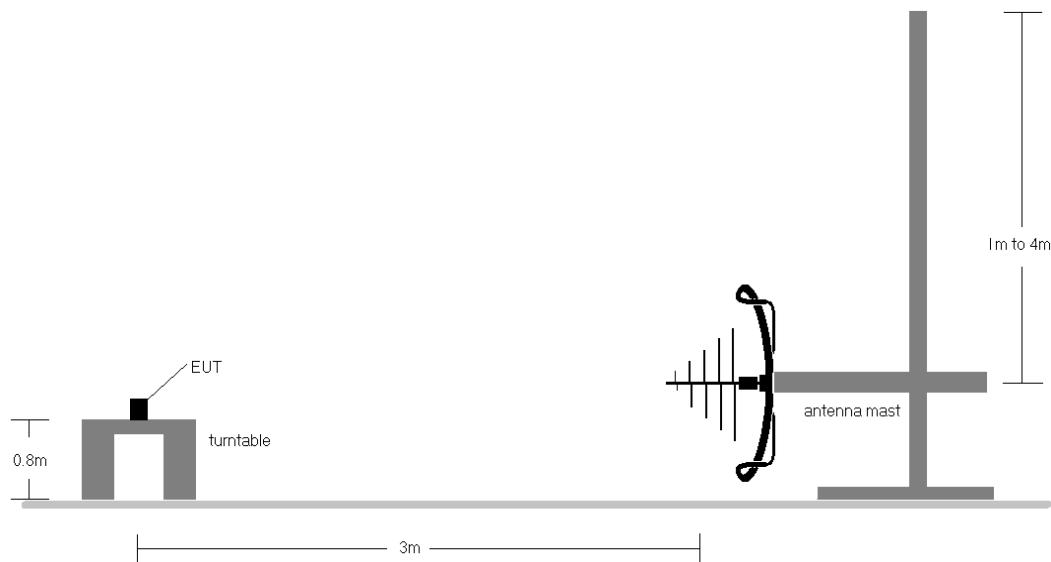

**Figure 7-7. Radiated Test Setup < 1GHz**

FCC ID: BCGA2567 IC: 579C-A2567	 <b>PCTEST®</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080048-07.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device		Page 341 of 351

## Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-192.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. Both configurations below were investigated, and the worst case has been reported.
  - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
  - b. EUT powered by host PC via USB-C cable with wire charger
10. All antenna configurations were investigated and only the worst case is reported.
11. The unit was tested with all possible modes and only the highest emission is reported.

## Sample Calculations


### Determining Spurious Emissions Levels

- Field Strength Level  $[\text{dB}_{\mu\text{V/m}}]$  = Analyzer Level  $[\text{dBm}] + 107 + \text{AFCL} [\text{dB/m}]$
- AFCL  $[\text{dB/m}]$  = Antenna Factor  $[\text{dB/m}] + \text{Cable Loss} [\text{dB}] - \text{Preamp Gain} [\text{dB}]$
- Margin  $[\text{dB}]$  = Field Strength Level  $[\text{dB}_{\mu\text{V/m}}] - \text{Limit} [\text{dB}_{\mu\text{V/m}}]$

FCC ID: BCGA2567 IC: 579C-A2567	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1C2106080048-07.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device	Page 342 of 351

## CDD Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

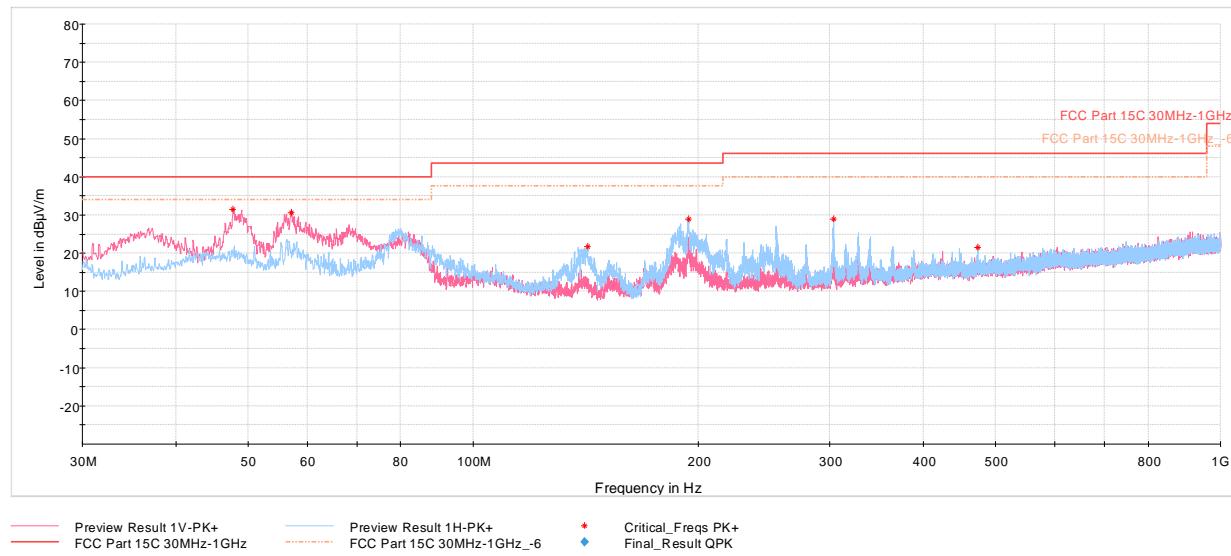


**Plot 7-1101. Radiated Spurious Emissions below 1GHz CDD, 802.11n, Ch.36 with AC/DC Adapter**

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
47.70	Max Peak	V	100	47	-62.56	-13.03	31.41	40.00	-8.59
57.16	Max Peak	V	100	316	-62.35	-14.06	30.59	40.00	-9.41
142.33	Max Peak	H	250	274	-66.39	-18.98	21.63	43.52	-21.89
194.32	Max Peak	H	100	306	-62.85	-15.29	28.86	43.52	-14.66
303.64	Max Peak	H	100	283	-65.26	-12.83	28.91	46.02	-17.11
473.73	Max Peak	H	250	90	-76.49	-9.05	21.46	46.02	-24.56

**Table 7-193. Radiated Spurious Emissions below 1GHz, 802.11n, Ch.36 with AC/DC Adapter**

FCC ID: BCGA2567 IC: 579C-A2567	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2106080048-07.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device			Page 343 of 351

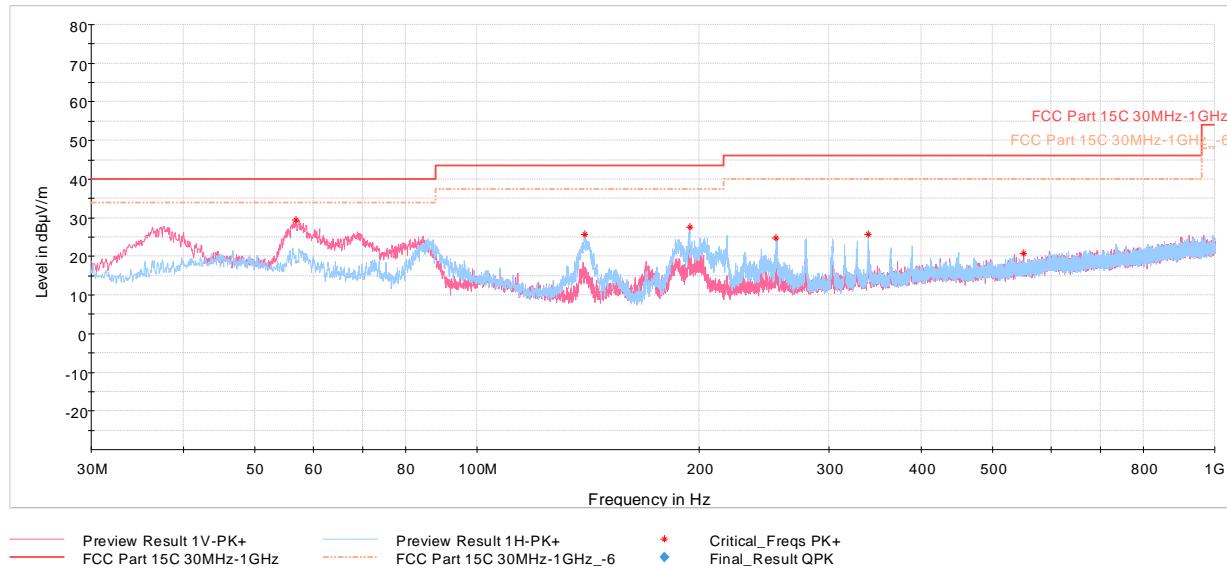

**Plot 7-1102. Radiated Spurious Emissions below 1GHz CDD, 802.11ax (SU), Ch.36 with AC/DC Adapter**

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turtable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
56.82	Max Peak	V	100	240	-63.62	-13.97	29.41	40.00	-10.59
140.19	Max Peak	H	100	294	-62.30	-18.98	25.72	43.52	-17.80
194.17	Max Peak	H	100	166	-64.08	-15.30	27.62	43.52	-15.90
254.56	Max Peak	H	100	253	-68.50	-13.67	24.83	46.02	-21.19
339.33	Max Peak	H	100	203	-69.86	-11.43	25.71	46.02	-20.31
550.65	Max Peak	V	250	113	-78.71	-7.46	20.83	46.02	-25.19

**Table 7-194. Radiated Spurious Emissions below 1GHz, 802.11ax (SU), Ch.36 with AC/DC Adapter**

FCC ID: BCGA2567 IC: 579C-A2567	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2106080048-07.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device			

## 7.8 AC Line-Conducted Emissions Measurement

§15.407; RSS-Gen [8.8]

### Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

***All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).***

Frequency of emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

**Table 7-195. Conducted Limits**

\*Decreases with the logarithm of the frequency.

### Test Procedures Used

ANSI C63.10-2013, Section 6.2

### Test Settings

#### Quasi-Peak Measurements

- Analyzer center frequency was set to the frequency of the spurious emission of interest
- RBW = 9kHz (for emissions from 150kHz – 30MHz)
- Detector = quasi-peak
- Sweep time = auto couple
- Trace mode = max hold
- Trace was allowed to stabilize


#### Average Measurements

3. Analyzer center frequency was set to the frequency of the spurious emission of interest
4. RBW = 9kHz (for emissions from 150kHz – 30MHz)
5. Detector = RMS
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

FCC ID: BCGA2567 IC: 579C-A2567	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080048-07.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device	Page 345 of 351

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

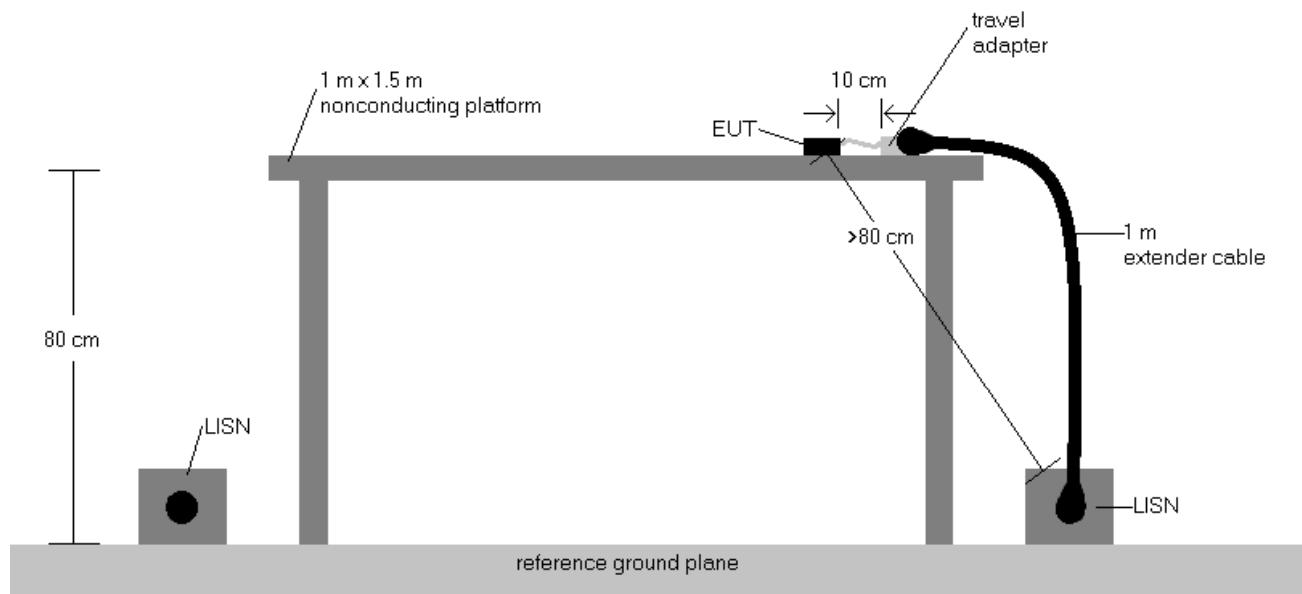


**Figure 7-8. Test Instrument & Measurement Setup**

## Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
  - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
  - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dB $\mu$ V) = QP/AV Analyzer/Receiver Level (dB $\mu$ V) + Correction Factor (dB)
6. Margin (dB) = QP/AV Level (dB $\mu$ V) - QP/AV Limit (dB $\mu$ V)
7. Traces shown in plots are made using quasi-peak and average detectors.
8. Deviations to the Specifications: None.
9. The unit was tested with all possible modes and only the highest emission is reported.

FCC ID: BCGA2567 IC: 579C-A2567	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080048-07.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device	Page 346 of 351

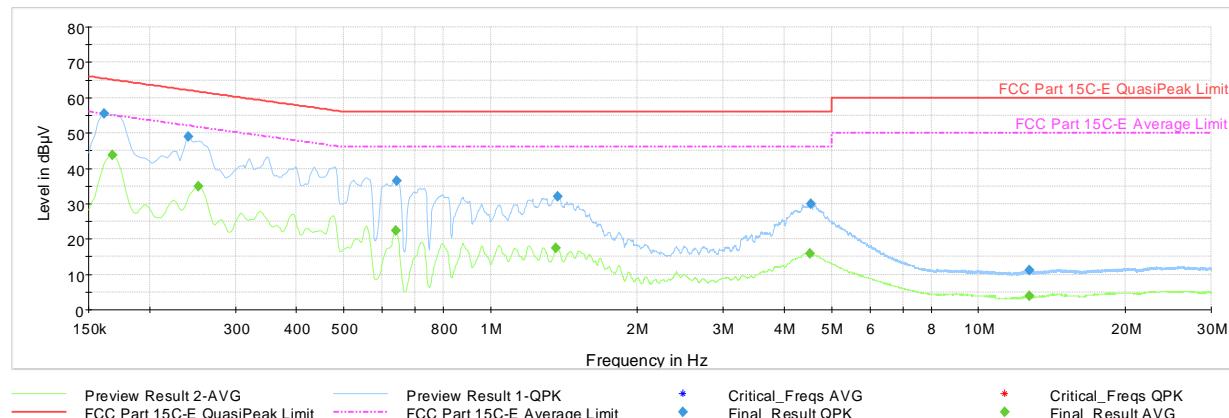


**Plot 7-1103. AC Line Conducted Plot with 802.11n CDD – Ch.36 (L1), with AC/DC adapter**

Frequency [MHz]	Process State	QuasiPeak [dB $\mu$ V]	Average [dB $\mu$ V]	Limit [dB $\mu$ V]	Margin [dB]	Line	PE
0.161	FINAL	55.5	—	65.40	-9.86	L1	GND
0.168	FINAL	—	43.80	55.06	-11.26	L1	GND
0.240	FINAL	49.1	—	62.10	-12.98	L1	GND
0.251	FINAL	—	35.00	51.72	-16.71	L1	GND
0.638	FINAL	—	22.50	46.00	-23.50	L1	GND
0.643	FINAL	36.4	—	56.00	-19.65	L1	GND
1.361	FINAL	—	17.36	46.00	-28.64	L1	GND
1.370	FINAL	32.0	—	56.00	-24.05	L1	GND
4.506	FINAL	—	15.88	46.00	-30.12	L1	GND
4.524	FINAL	30.0	—	56.00	-25.96	L1	GND
12.696	FINAL	—	3.88	50.00	-46.12	L1	GND
12.698	FINAL	11.1	—	60.00	-48.90	L1	GND

**Table 7-196. AC Line Conducted Data with 802.11n CDD – Ch.36 (L1) with AC/DC adapter**

FCC ID: BCGA2567 IC: 579C-A2567	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2106080048-07.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device		Page 347 of 351

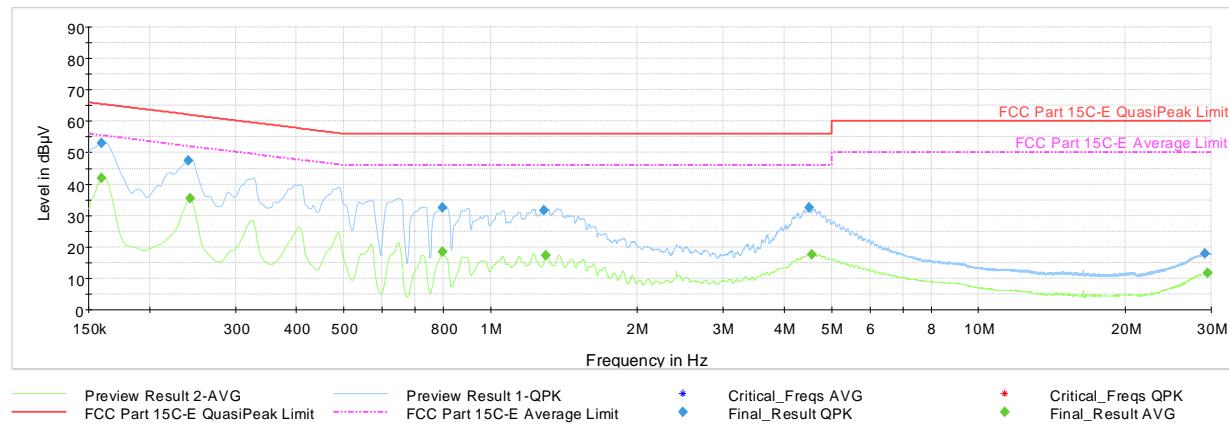


**Plot 7-1104. AC Line Conducted Plot with 802.11n CDD – Ch.36 (N), with AC/DC adapter**

Frequency [MHz]	Process State	QuasiPeak [dB $\mu$ V]	Average [dB $\mu$ V]	Limit [dB $\mu$ V]	Margin [dB]	Line	PE
0.159	FINAL	53.1	—	65.52	-12.38	N	GND
0.159	FINAL	—	41.86	55.52	-13.65	N	GND
0.240	FINAL	47.4	—	62.10	-14.66	N	GND
0.242	FINAL	—	35.35	52.02	-16.67	N	GND
0.796	FINAL	32.5	—	56.00	-23.48	N	GND
0.796	FINAL	—	18.41	46.00	-27.59	N	GND
1.289	FINAL	31.6	—	56.00	-24.45	N	GND
1.298	FINAL	—	17.23	46.00	-28.77	N	GND
4.495	FINAL	32.4	—	56.00	-23.56	N	GND
4.558	FINAL	—	17.45	46.00	-28.55	N	GND
29.047	FINAL	17.8	—	60.00	-42.19	N	GND
29.441	FINAL	—	11.59	50.00	-38.41	N	GND

**Table 7-197. AC Line Conducted Data with 802.11n CDD – Ch.36 (N), with AC/DC adapter**

FCC ID: BCGA2567 IC: 579C-A2567	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080048-07.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device	Page 348 of 351

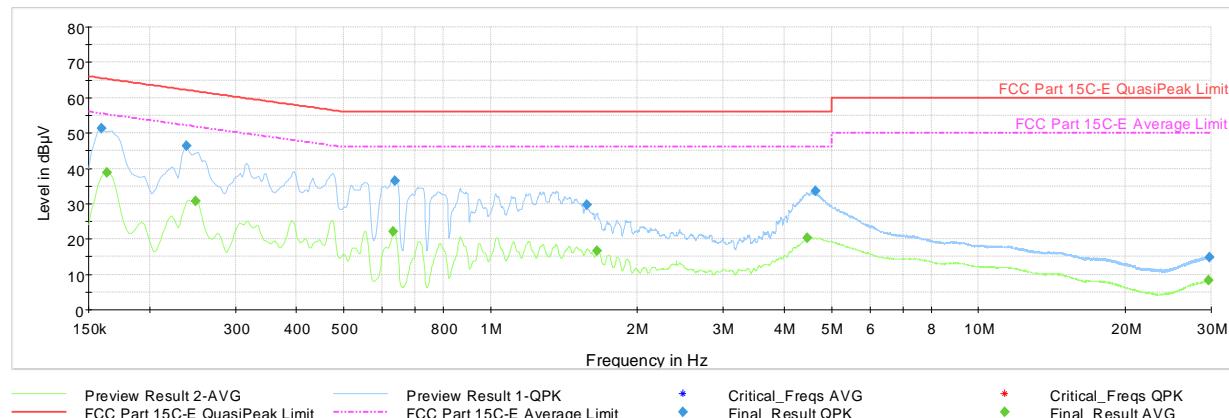


**Plot 7-1105. AC Line Conducted Plot with 802.11ax(SU) CDD – Ch.36 (L1), with AC/DC adapter**

Frequency [MHz]	Process State	QuasiPeak [dB $\mu$ V]	Average [dB $\mu$ V]	Limit [dB $\mu$ V]	Margin [dB]	Line	PE
0.159	FINAL	51.2	—	65.52	-14.29	L1	GND
0.164	FINAL	—	38.85	55.28	-16.43	L1	GND
0.238	FINAL	46.3	—	62.17	-15.87	L1	GND
0.249	FINAL	—	30.85	51.79	-20.94	L1	GND
0.632	FINAL	—	22.15	46.00	-23.85	L1	GND
0.636	FINAL	36.5	—	56.00	-19.51	L1	GND
1.577	FINAL	29.7	—	56.00	-26.29	L1	GND
1.653	FINAL	—	16.73	46.00	-29.27	L1	GND
4.450	FINAL	—	20.22	46.00	-25.78	L1	GND
4.625	FINAL	33.6	—	56.00	-22.40	L1	GND
29.675	FINAL	—	8.41	50.00	-41.59	L1	GND
29.695	FINAL	14.9	—	60.00	-45.15	L1	GND

**Table 7-198. AC Line Conducted Data with 802.11ax(SU) CDD – Ch.36 (L1) with AC/DC adapter**

FCC ID: BCGA2567 IC: 579C-A2567	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2106080048-07.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device		Page 349 of 351

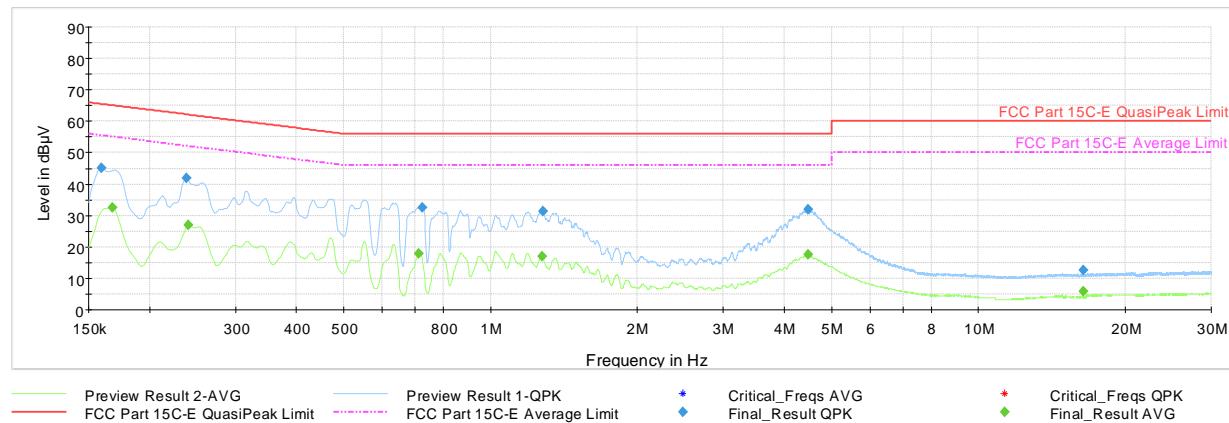

**Plot 7-1106. AC Line Conducted Plot with 802.11ax(SU) CDD – Ch.36 (N), with AC/DC adapter**

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.159	FINAL	45.0	—	65.52	-20.51	N	GND
0.168	FINAL	—	32.41	55.06	-22.65	N	GND
0.238	FINAL	42.0	—	62.17	-20.13	N	GND
0.240	FINAL	—	26.92	52.10	-25.17	N	GND
0.713	FINAL	—	17.81	46.00	-28.19	N	GND
0.724	FINAL	32.5	—	56.00	-23.47	N	GND
1.273	FINAL	—	17.01	46.00	-28.99	N	GND
1.280	FINAL	31.3	—	56.00	-24.75	N	GND
4.466	FINAL	—	17.46	46.00	-28.54	N	GND
4.466	FINAL	31.8	—	56.00	-24.18	N	GND
16.413	FINAL	12.6	—	60.00	-47.36	N	GND
16.413	FINAL	—	5.72	50.00	-44.28	N	GND

**Table 7-199. AC Line Conducted Data with 802.11ax(SU) CDD – Ch.36 (N), with AC/DC adapter**

FCC ID: BCGA2567 IC: 579C-A2567	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2106080048-07.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device		Page 350 of 351

## 8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device** **FCC ID: BCGA2567** and **IC: 579C-A2567** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA2567 IC: 579C-A2567	 PCTEST <sup>®</sup> Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080048-07.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device		Page 351 of 351