



Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2457MHz
 Channel: 10

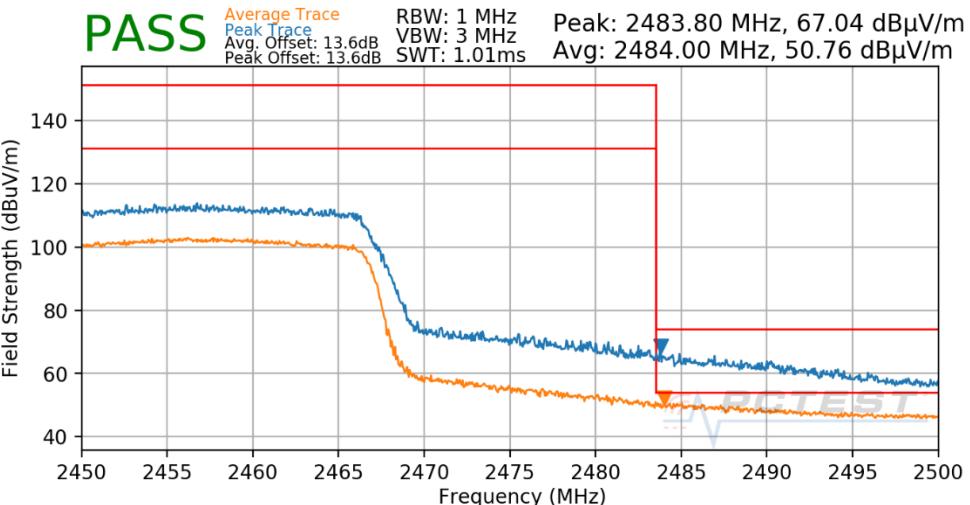

Plot 7-180. Radiated Restricted Upper Band Edge Measurement Antenna WF7 (Peak & Average – RU242)


Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

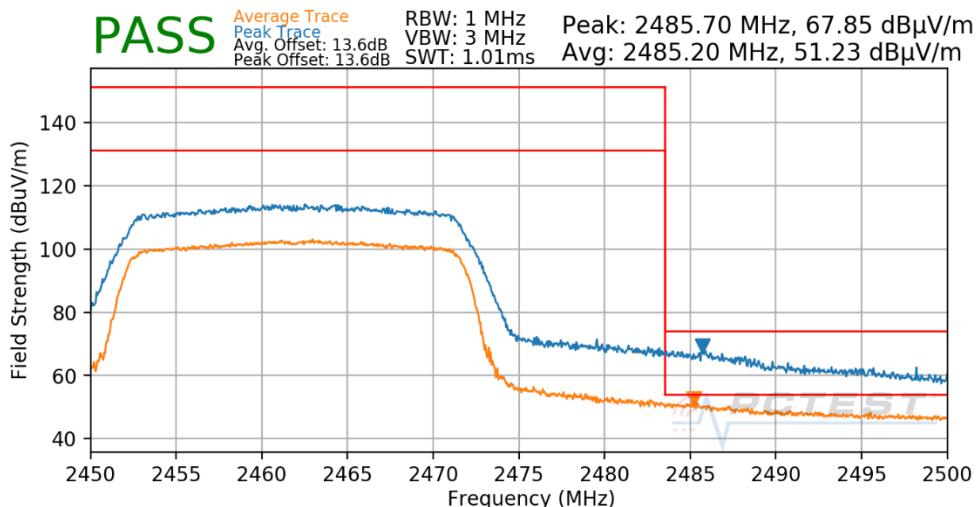

Plot 7-181. Radiated Restricted Upper Band Edge Measurement Antenna WF7 (Peak & Average – RU242)

FCC ID: BCGA2567 IC: 579C-A2567	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080048-02.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device	Page 135 of 157

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

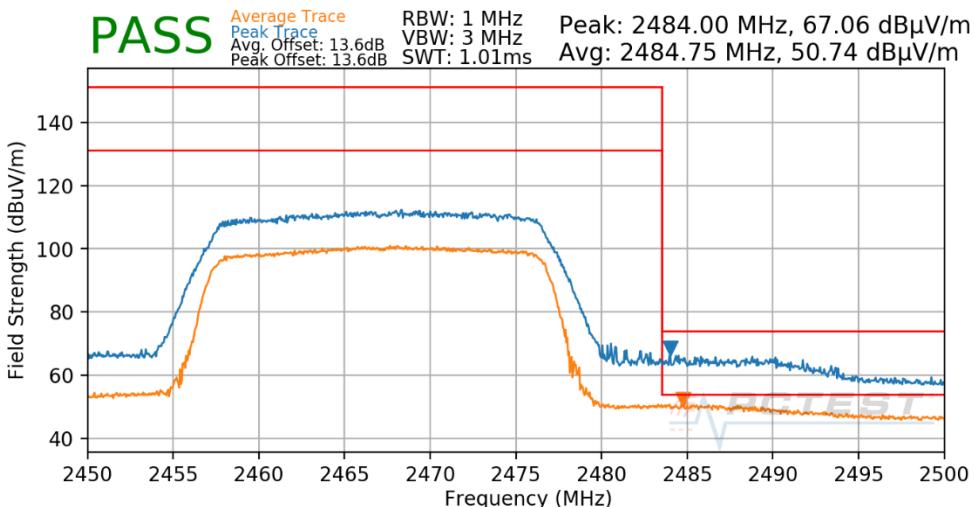

Plot 7-182. Radiated Restricted Upper Band Edge Measurement Antenna WF7 (Peak & Average – RU242)


FCC ID: BCGA2567 IC: 579C-A2567	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080048-02.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device	Page 136 of 157	

7.7.6 CDD Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]


The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode: 802.11ax OFDMA
Worst Case Transfer Rate: MCS9
RU Index: 0
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 1

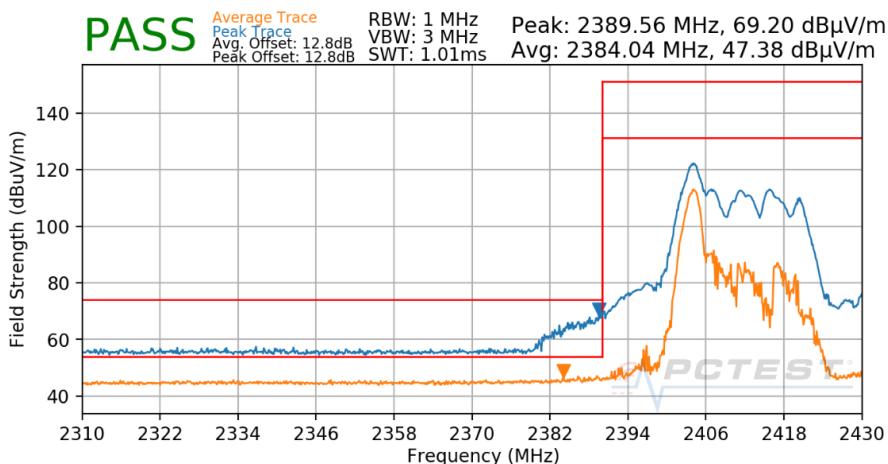

Plot 7-183. Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU26)


Worst Case Mode: 802.11ax OFDMA
Worst Case Transfer Rate: MCS9
RU Index: 0
Distance of Measurements: 3 Meters
Operating Frequency: 2417MHz
Channel: 2

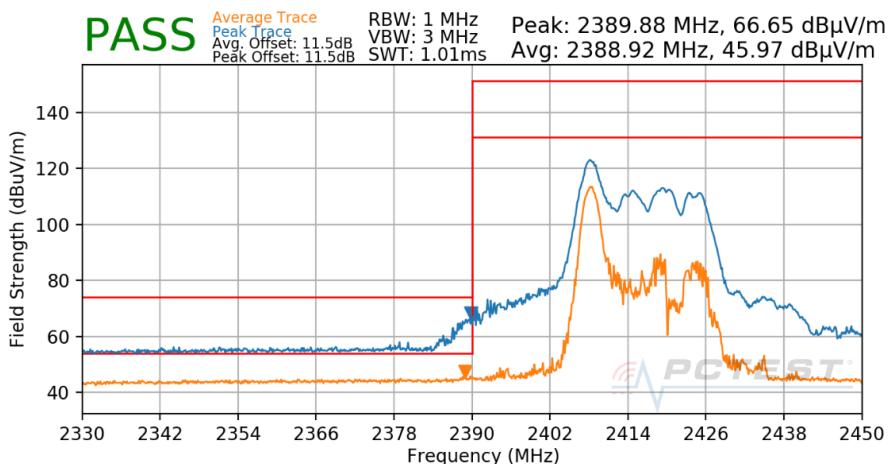

Plot 7-184. Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU26)


FCC ID: BCGA2567 IC: 579C-A2567	 PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080048-02.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device	Page 137 of 157	

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS9
 RU Index: 8
 Distance of Measurements: 3 Meters
 Operating Frequency: 2457MHz
 Channel: 10

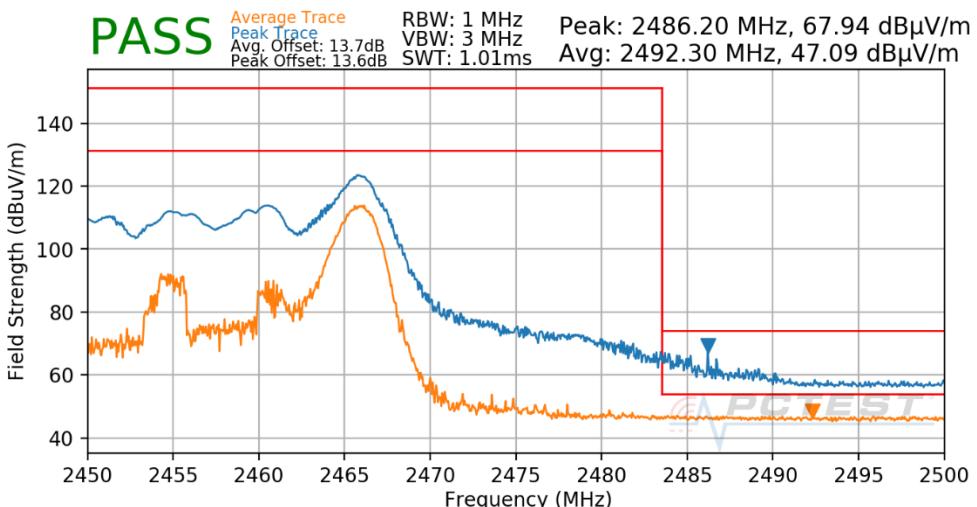

Plot 7-185. Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU26)


Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS9
 RU Index: 8
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

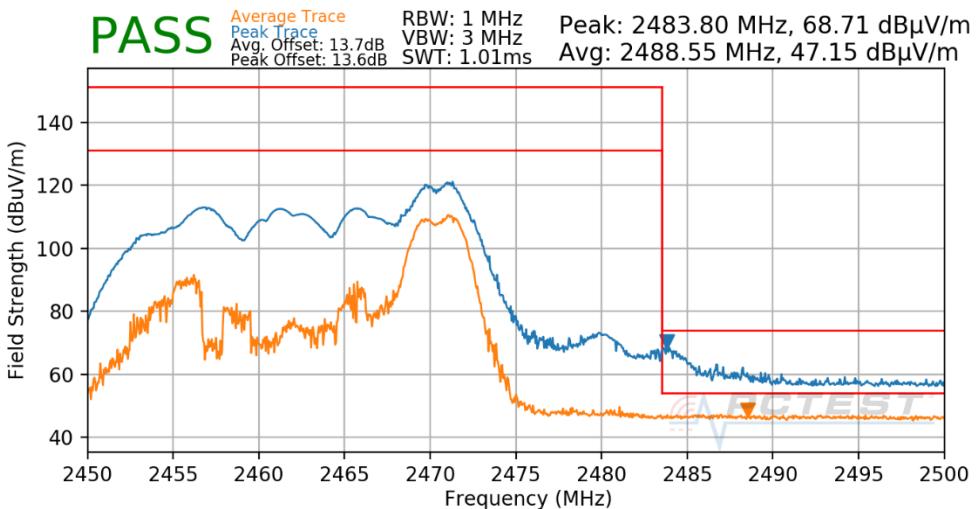

Plot 7-186. Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU26)


FCC ID: BCGA2567 IC: 579C-A2567	PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080048-02.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device	Page 138 of 157

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS9
 RU Index: 8
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

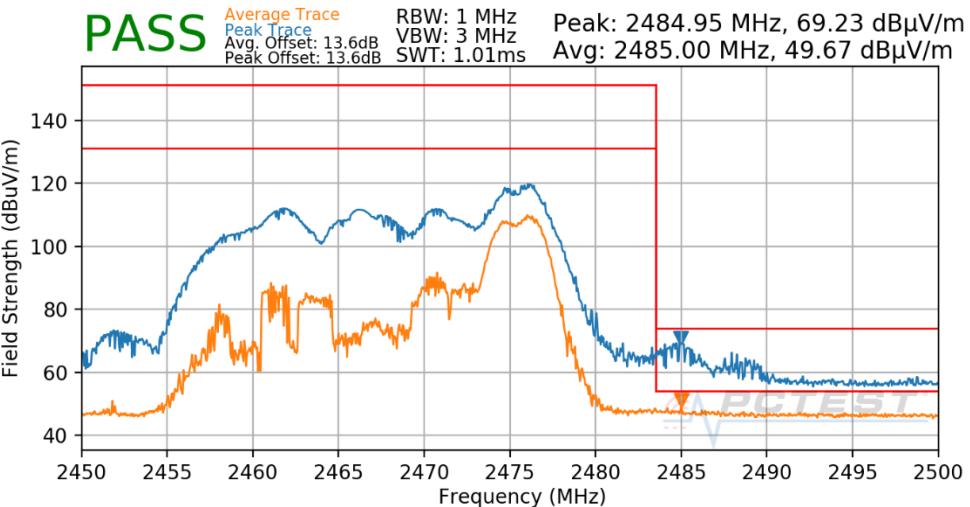

Plot 7-187. Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU26)

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

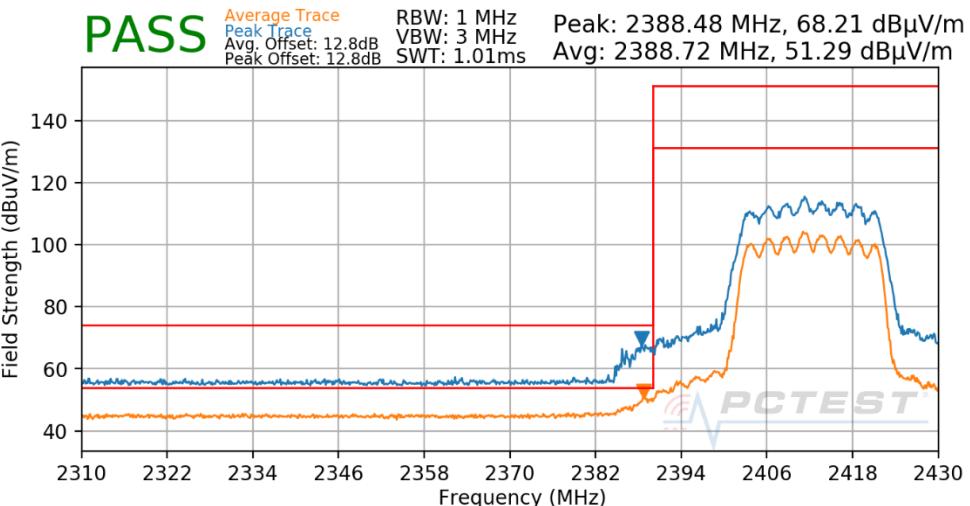


Plot 7-188. Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU242)

FCC ID: BCGA2567 IC: 579C-A2567	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080048-02.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device		Page 139 of 157

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2417MHz
 Channel: 2

PASS

Average Trace
 Peak Trace
 Avg. Offset: 12.8dB
 Peak Offset: 12.8dB
 RBW: 1 MHz
 VBW: 3 MHz
 SWT: 1.01ms
 Peak: 2389.80 MHz, 69.24 dB μ V/m
 Avg: 2389.92 MHz, 50.78 dB μ V/m

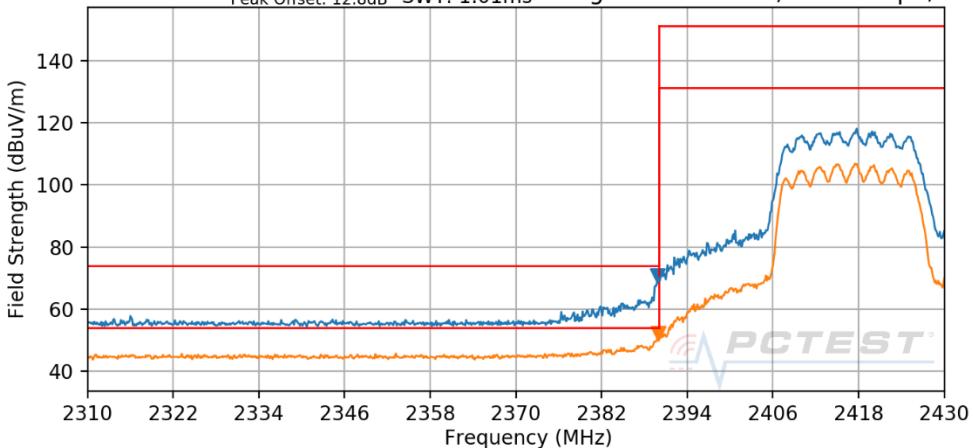


Plot 7-189. Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU242)

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2422MHz
 Channel: 3

PASS

Average Trace
 Peak Trace
 Avg. Offset: 12.8dB
 Peak Offset: 12.8dB
 RBW: 1 MHz
 VBW: 3 MHz
 SWT: 1.01ms
 Peak: 2388.48 MHz, 69.14 dB μ V/m
 Avg: 2389.44 MHz, 51.09 dB μ V/m

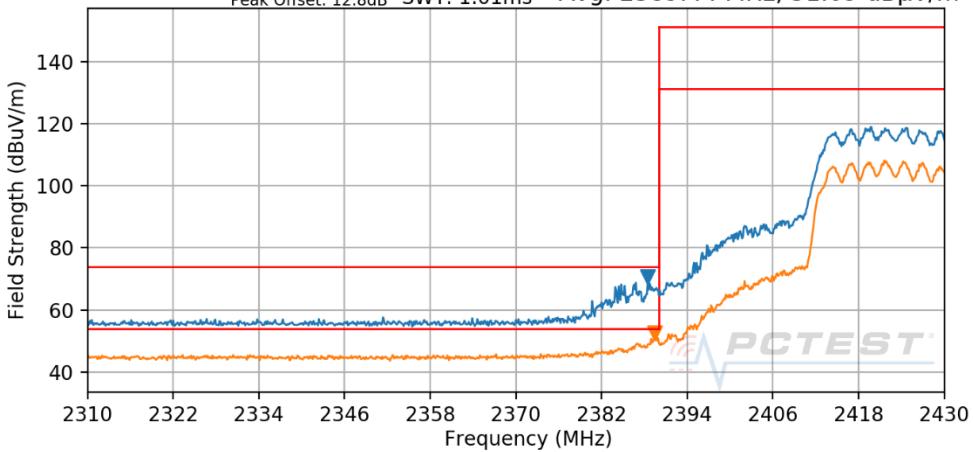


Plot 7-190. Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU242)

FCC ID: BCGA2567 IC: 579C-A2567	PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080048-02.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device		Page 140 of 157

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2427MHz
 Channel: 4


PASS Average Trace Peak Trace RBW: 1 MHz
Avg. Offset: 12.8dB VBW: 3 MHz
Peak Offset: 12.8dB SWT: 1.01ms Peak: 2388.24 MHz, 69.05 dB μ V/m
Avg: 2389.92 MHz, 48.37 dB μ V/m

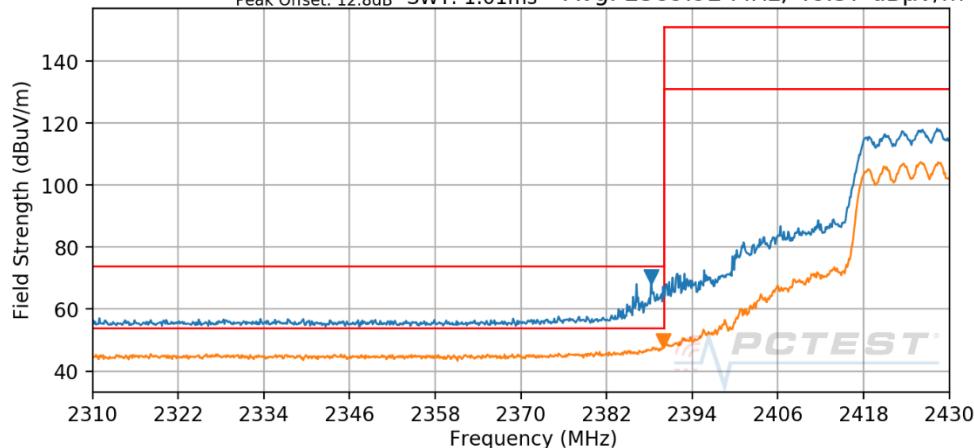

Plot 7-191. Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU242)

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2432MHz
 Channel: 5


PASS Average Trace Peak Trace RBW: 1 MHz
Avg. Offset: 12.8dB VBW: 3 MHz
Peak Offset: 12.8dB SWT: 1.01ms Peak: 2389.20 MHz, 67.22 dB μ V/m
Avg: 2389.56 MHz, 50.95 dB μ V/m

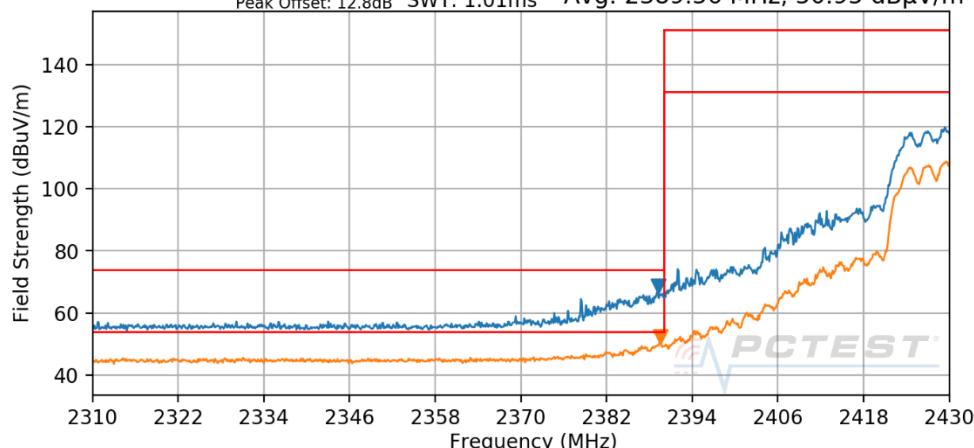

Plot 7-192. Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU242)


FCC ID: BCGA2567 IC: 579C-A2567	PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080048-02.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device		Page 141 of 157

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 6

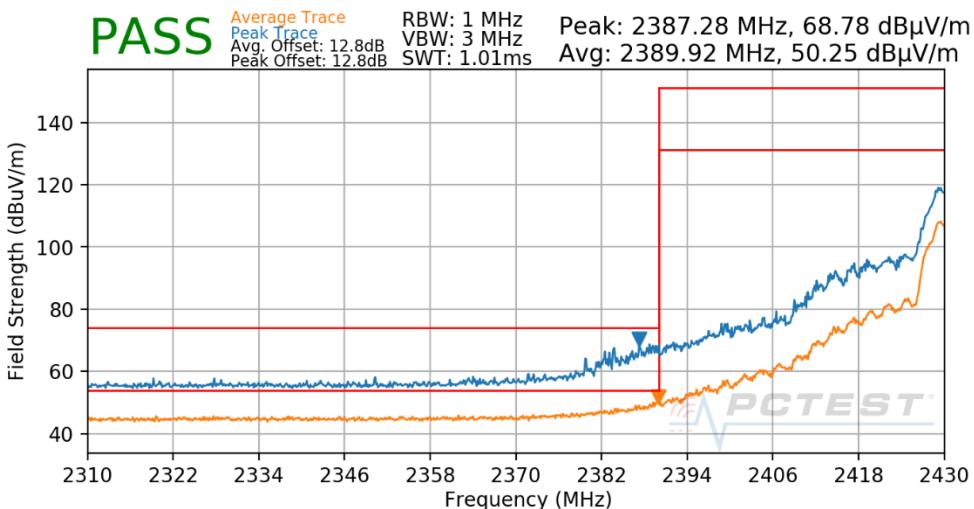

Plot 7-193. Radiated Restricted Lower Band Edge Measurement CDD (Peak & Average – RU242)


Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 6

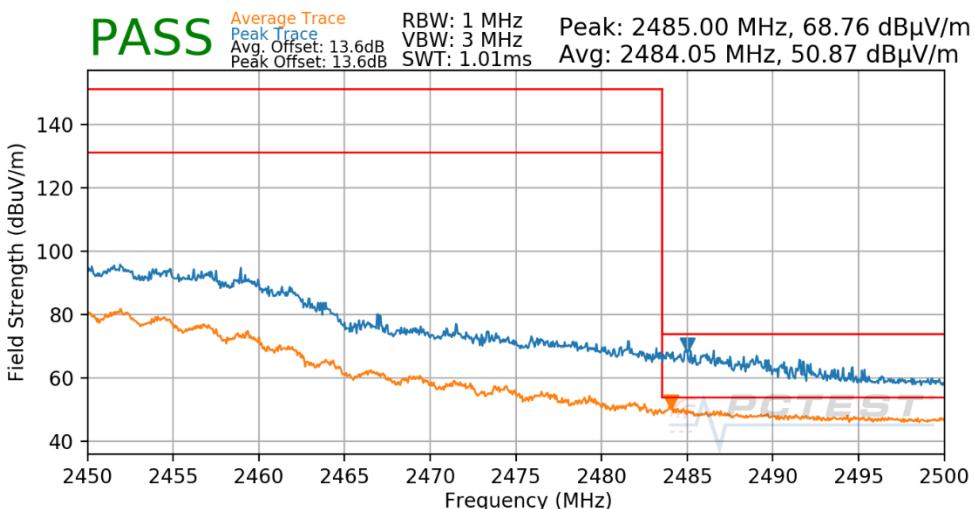

Plot 7-194. Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU242)


FCC ID: BCGA2567 IC: 579C-A2567	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080048-02.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device	Page 142 of 157

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2442MHz
 Channel: 7

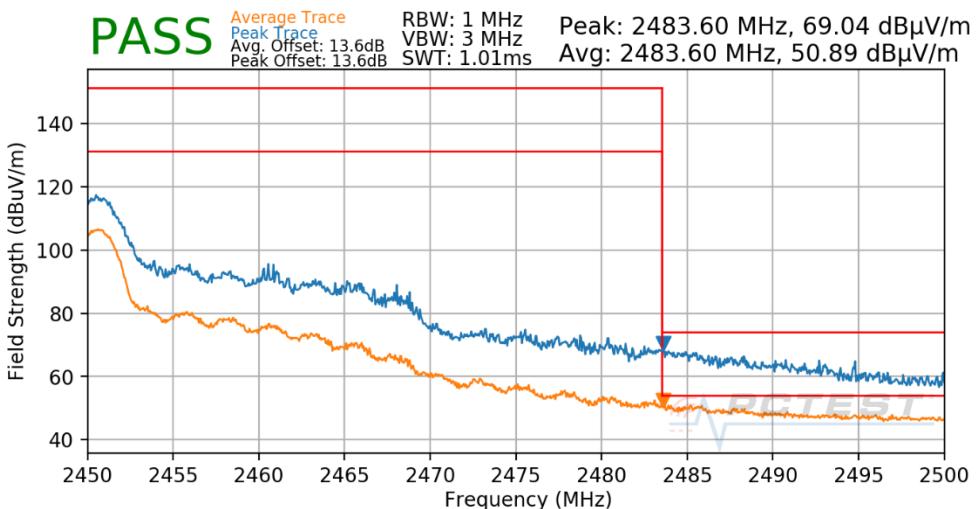

Plot 7-195. Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU242)


Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2447MHz
 Channel: 8

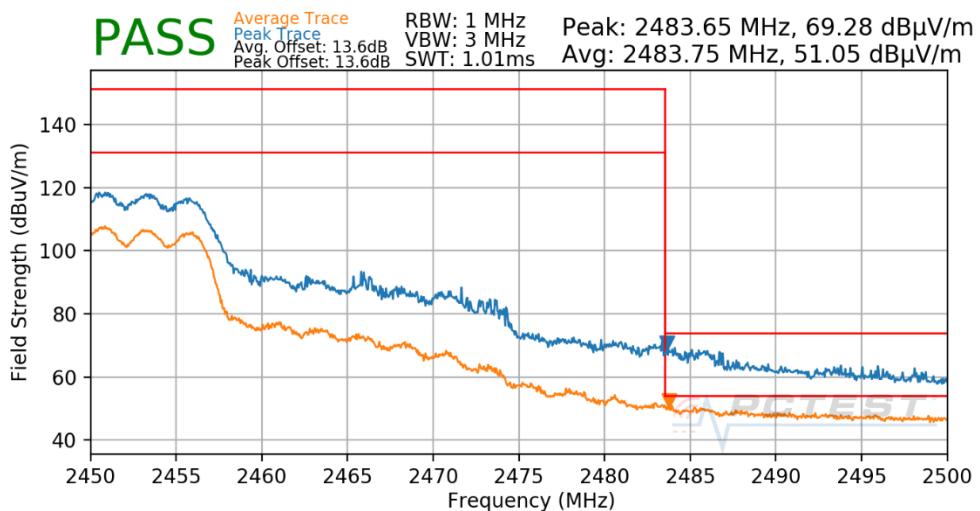

Plot 7-196. Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU242)


FCC ID: BCGA2567 IC: 579C-A2567	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080048-02.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device	Page 143 of 157

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2452MHz
 Channel: 9

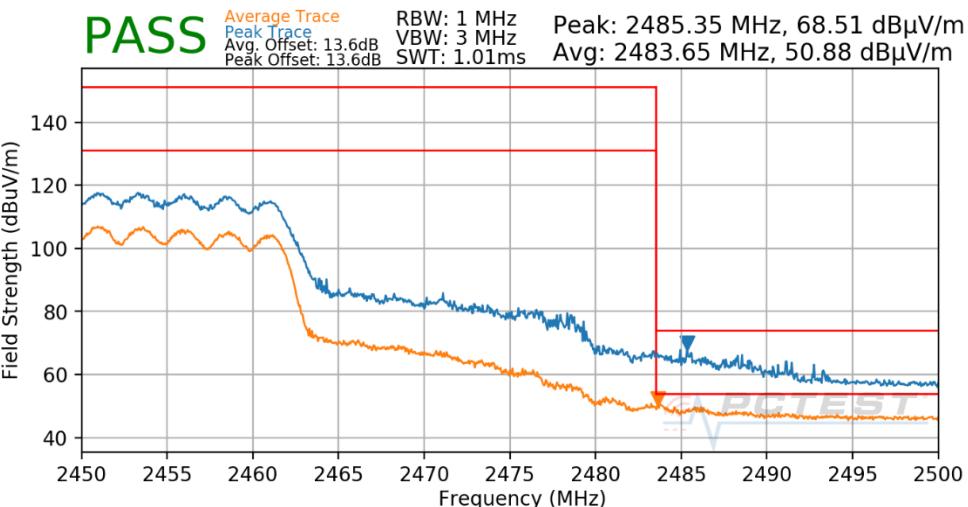

Plot 7-197. Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU242)

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2457MHz
 Channel: 10

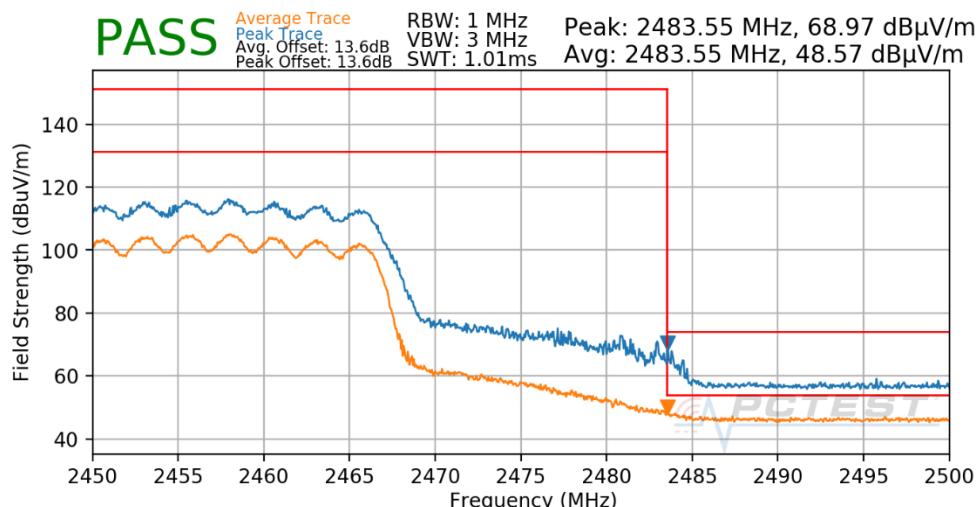


Plot 7-198. Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU242)

FCC ID: BCGA2567 IC: 579C-A2567	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080048-02.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device	Page 144 of 157	

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

PASS

Average Trace RBW: 1 MHz
 Peak Trace VBW: 3 MHz
 Avg. Offset: 13.6dB SWT: 1.01ms
 Peak Offset: 13.6dB Peak: 2483.60 MHz, 67.99 dB μ V/m
 Avg: 2483.70 MHz, 50.95 dB μ V/m

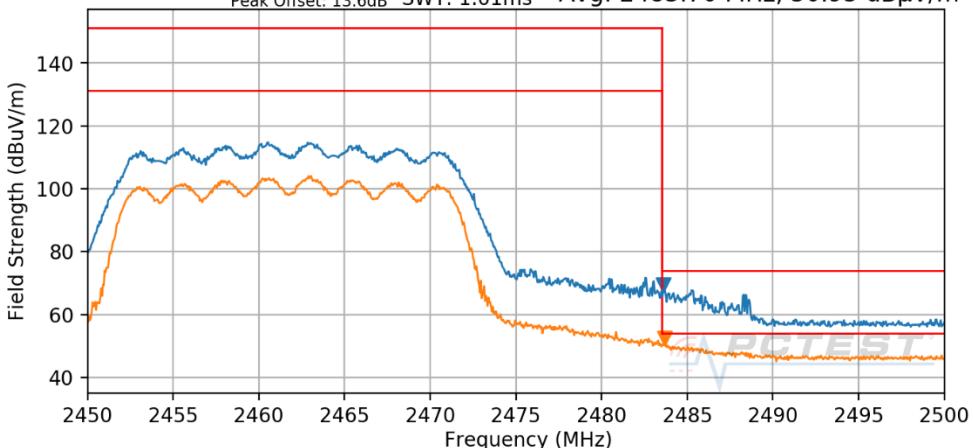


Plot 7-199. Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU242)

Worst Case Mode: 802.11ax OFDMA
 Worst Case Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

PASS

Average Trace RBW: 1 MHz
 Peak Trace VBW: 3 MHz
 Avg. Offset: 13.6dB SWT: 1.01ms
 Peak Offset: 13.7dB Peak: 2486.50 MHz, 65.91 dB μ V/m
 Avg: 2483.65 MHz, 51.21 dB μ V/m

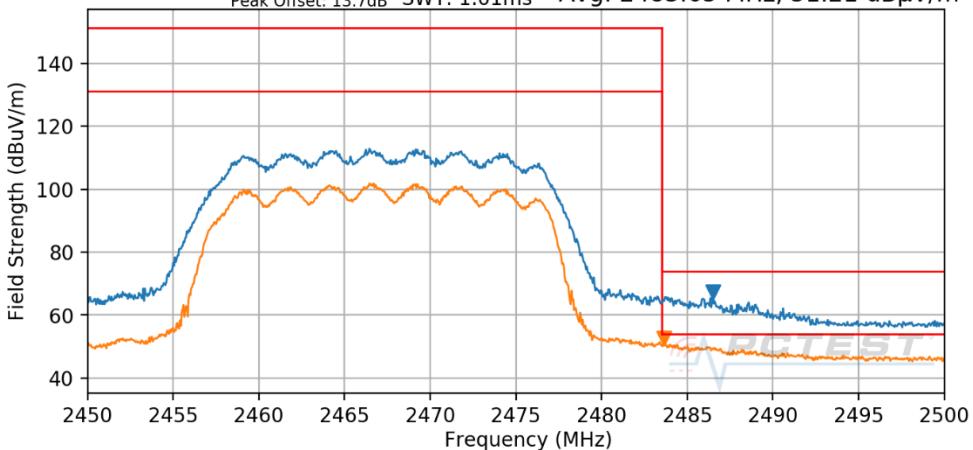

Plot 7-200. Radiated Restricted Upper Band Edge Measurement CDD (Peak & Average – RU242)

FCC ID: BCGA2567 IC: 579C-A2567	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080048-02.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device	Page 145 of 157

7.8 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-38 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-38. Radiated Limits

Test Procedures Used

ANSI C63.10-2013


Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold

FCC ID: BCGA2567 IC: 579C-A2567	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080048-02.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device	Page 146 of 157

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

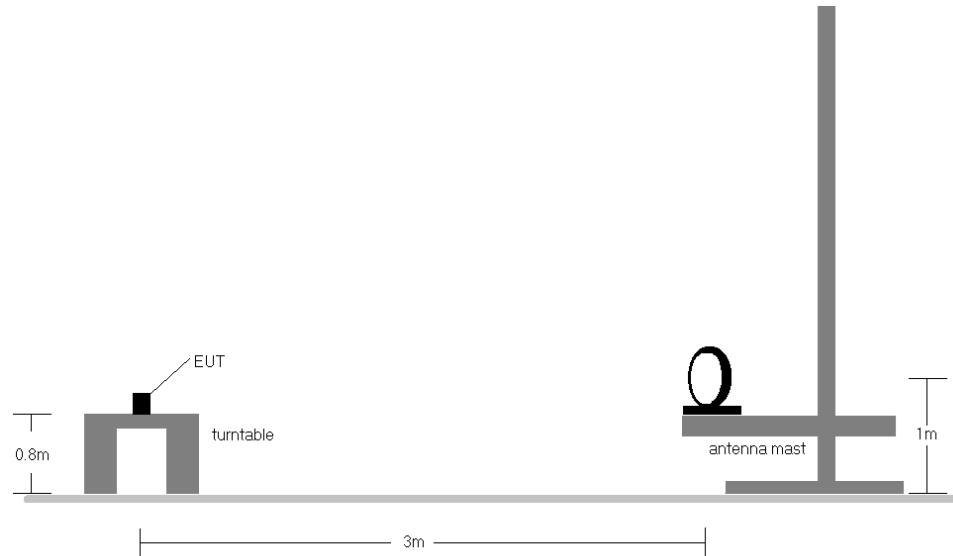


Figure 7-7. Radiated Test Setup < 30Mhz

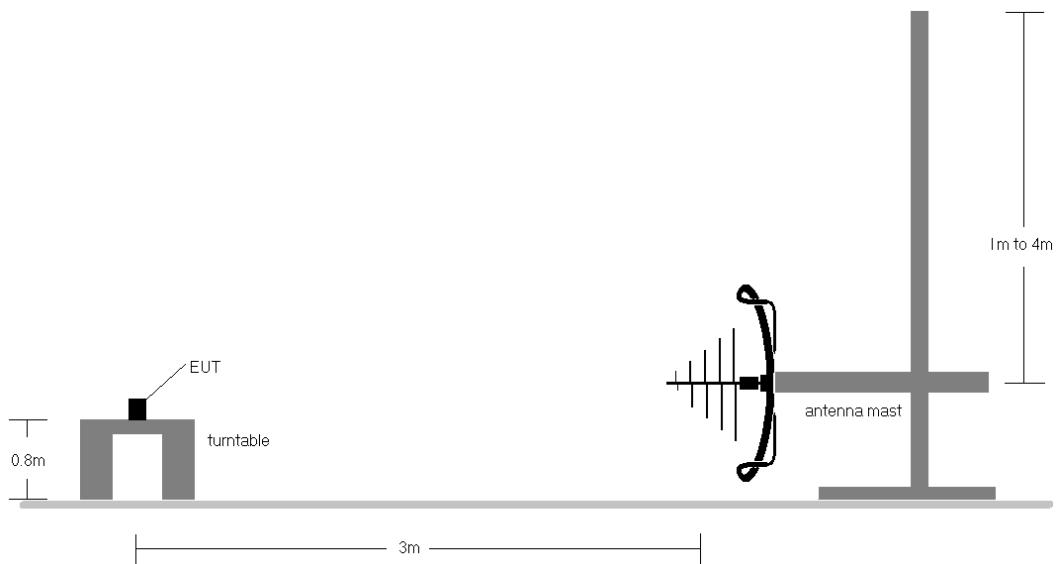


Figure 7-8. Radiated Test Setup < 1GHz

FCC ID: BCGA2567 IC: 579C-A2567	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2106080048-02.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device	Page 147 of 157

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen(8.10) are below the limit shown in Table 7-38.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
8. No spurious emissions were detected within 20dB of the limit below 30MHz.
9. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
10. All antenna configurations and data rates were investigated and only the worst case are reported.
11. For radiated measurements, emissions were investigated for the fully-loaded RU configuration and for all the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.

Sample Calculations


Determining Spurious Emissions Levels

- Field Strength Level [dB_μV/m] = Analyzer Level [dB_m] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] – Preamplifier Gain [dB]
- Margin [dB] = Field Strength Level [dB_μV/m] – Limit [dB_μV/m]

FCC ID: BCGA2567 IC: 579C-A2567	 PCTEST[®] Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080048-02.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device		Page 148 of 157

CDD Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

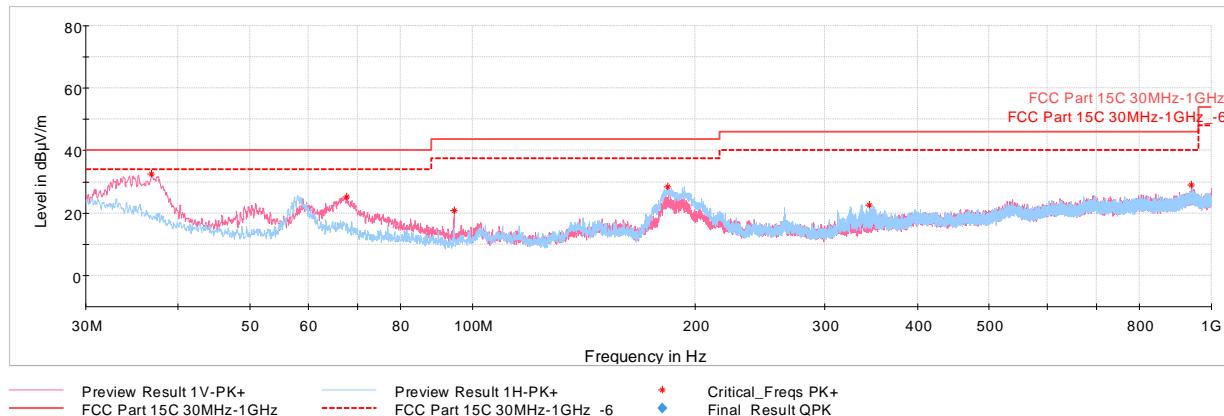


Plot 7-201. Radiated Spurious Emissions below 1GHz CDD Ch.6 (RU26), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
36.79	Max Peak	V	100	112	-59.14	-15.26	32.60	40.00	-7.40
67.68	Max Peak	V	100	242	-61.22	-20.74	25.04	40.00	-14.96
94.55	Max Peak	V	100	290	-65.76	-20.36	20.88	43.52	-22.64
183.89	Max Peak	H	250	56	-61.92	-16.78	28.30	43.52	-15.22
344.77	Max Peak	H	100	228	-73.18	-11.26	22.56	46.02	-23.46
939.52	Max Peak	V	100	15	-78.78	0.80	29.02	46.02	-17.00

Table 7-39. Radiated Spurious Emissions below 1GHz CDD Ch.6 (RU26), with AC/DC Adapter

FCC ID: BCGA2567 IC: 579C-A2567	PCTEST[®] Proud to be part of element			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080048-02.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device			Page 149 of 157

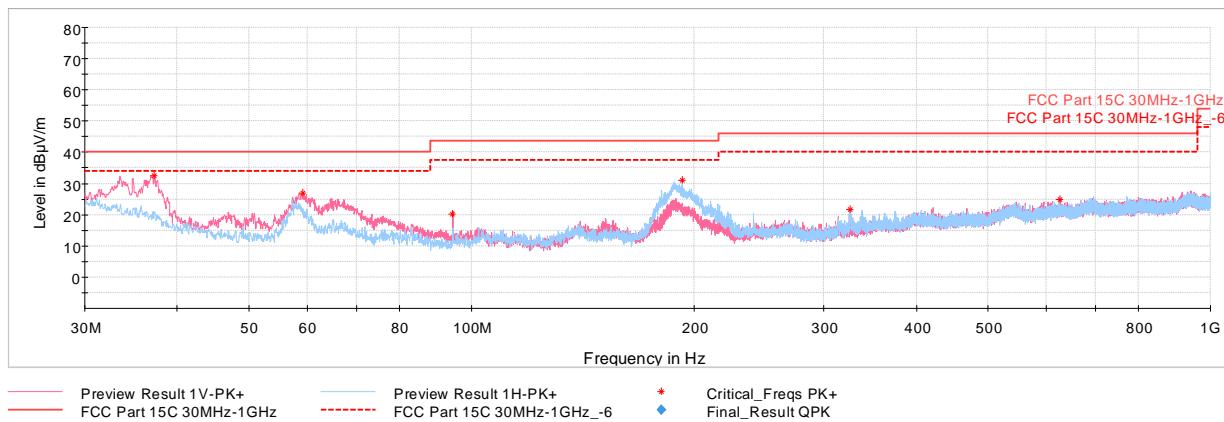

Plot 7-202. Radiated Spurious Emissions below 1GHz CDD Ch.6 (RU242), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
37.28	Max Peak	V	100	59	-58.79	-15.63	32.58	40.00	-7.42
59.25	Max Peak	V	100	1	-58.97	-21.14	26.89	40.00	-13.11
94.41	Max Peak	V	100	267	-66.27	-20.44	20.29	43.52	-23.23
192.81	Max Peak	H	100	203	-58.54	-17.48	30.98	43.52	-12.54
325.27	Max Peak	H	100	208	-72.37	-13.07	21.56	46.02	-24.46
625.14	Max Peak	V	250	141	-78.63	-3.56	24.81	46.02	-21.21

Table 7-40. Radiated Spurious Emissions below 1GHz CDD Ch.6 (RU242), with AC/DC Adapter

FCC ID: BCGA2567 IC: 579C-A2567	PCTEST [®] Proud to be part of 			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080048-02.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device			Page 150 of 157

7.9 AC Line-Conducted Emissions Measurement

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-41. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2


Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA2567 IC: 579C-A2567	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080048-02.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device	Page 151 of 157

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


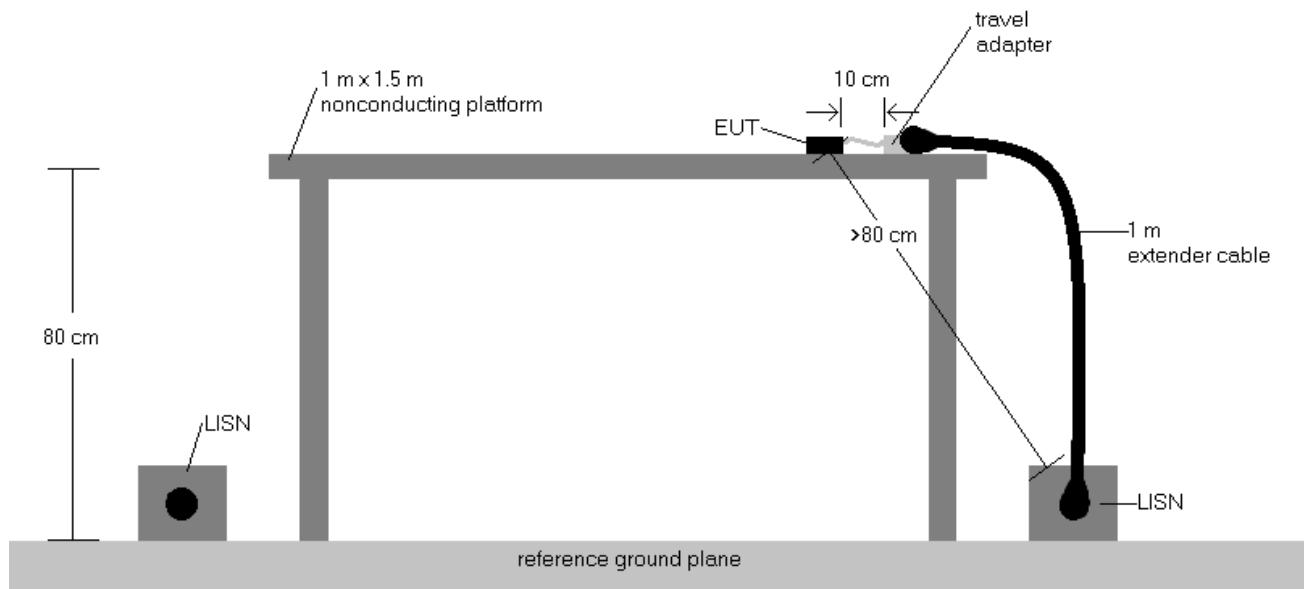


Figure 7-9. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dB μ V) = QP/AV Analyzer/Receiver Level (dB μ V) + Correction Factore (dB)
6. Margin (dB) = QP/AV Level (dB μ V) - QP/AV Limit (dB μ V)
7. Traces shown in plot are made using quasi peak and average detectors.
8. Deviations to the Specifications: None.
9. All RU's were investigated and only worst case partially-loaded and fully-loaded RU's are reported.


FCC ID: BCGA2567 IC: 579C-A2567	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080048-02.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device	Page 152 of 157

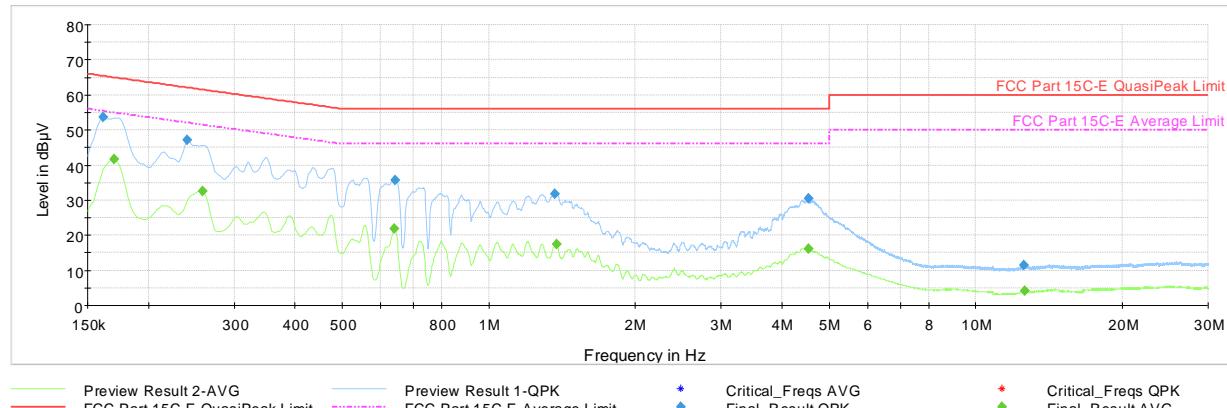

Frequency [MHz]	Process State	QuasiPeak [dB μ V]	Average [dB μ V]	Limit [dB μ V]	Margin [dB]	Line	PE
0.161	FINAL	53.72	---	65.40	-11.68	L1	GND
0.170	FINAL	---	41.70	54.95	-13.24	L1	GND
0.240	FINAL	47.10	---	62.10	-15.00	L1	GND
0.258	FINAL	---	32.51	51.50	-18.99	L1	GND
0.641	FINAL	---	21.88	46.00	-24.12	L1	GND
0.643	FINAL	35.58	---	56.00	-20.42	L1	GND
1.365	FINAL	31.70	---	56.00	-24.30	L1	GND
1.376	FINAL	---	17.36	46.00	-28.64	L1	GND
4.524	FINAL	---	16.04	46.00	-29.96	L1	GND
4.524	FINAL	30.47	---	56.00	-25.53	L1	GND
12.543	FINAL	11.38	---	60.00	-48.62	L1	GND
12.586	FINAL	---	4.06	50.00	-45.94	L1	GND

Table 7-42. AC Line Conducted Data with 802.11ax CDD (RU26) Ch.6 (L1, with Adapter)

FCC ID: BCGA2567 IC: 579C-A2567	PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080048-02.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device	Page 153 of 157

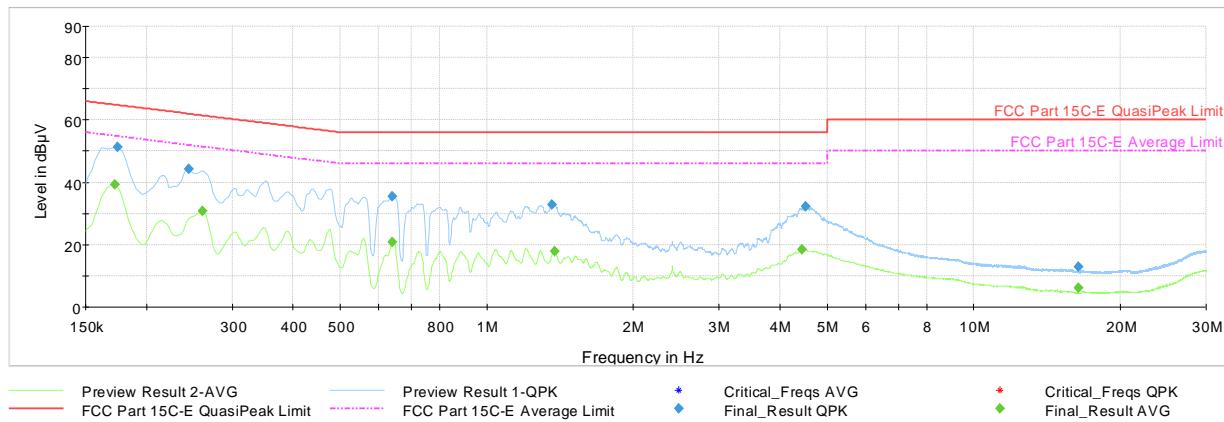


Plot 7-204. AC Line Conducted Emissions with 802.11ax CDD (RU26) Ch.6 (N, with Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.173	FINAL	---	39.31	54.84	-15.53	N	GND
0.175	FINAL	51.29	---	64.73	-13.44	N	GND
0.245	FINAL	44.27	---	61.94	-17.68	N	GND
0.260	FINAL	---	30.66	51.42	-20.76	N	GND
0.638	FINAL	---	20.67	46.00	-25.33	N	GND
0.641	FINAL	35.41	---	56.00	-20.59	N	GND
1.361	FINAL	32.71	---	56.00	-23.29	N	GND
1.376	FINAL	---	17.81	46.00	-28.19	N	GND
4.427	FINAL	---	18.36	46.00	-27.64	N	GND
4.522	FINAL	32.14	---	56.00	-23.86	N	GND
16.382	FINAL	12.91	---	60.00	-47.09	N	GND
16.382	FINAL	---	6.01	50.00	-43.99	N	GND

Table 7-43. AC Line Conducted Data with 802.11ax CDD (RU26) Ch.6 (N, with Adapter)

FCC ID: BCGA2567 IC: 579C-A2567	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080048-02.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device	Page 154 of 157

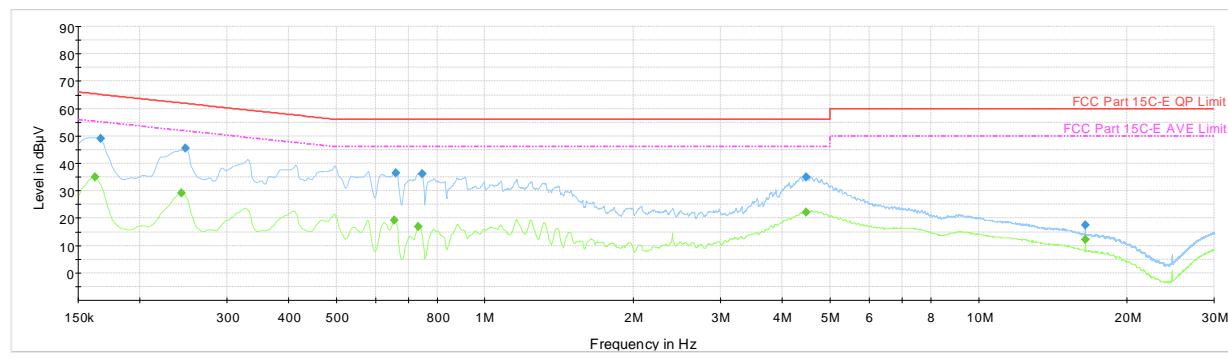


Plot 7-205. AC Line Conducted Emissions with 802.11ax CDD (RU242) Ch.6 (L1, with Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.162	FINAL	---	35.16	55.36	-20.20	L1	GND
0.167	FINAL	48.93	---	65.13	-16.21	L1	GND
0.243	FINAL	---	29.24	51.99	-22.75	L1	GND
0.248	FINAL	45.55	---	61.84	-16.29	L1	GND
0.655	FINAL	---	19.25	46.00	-26.75	L1	GND
0.659	FINAL	36.52	---	56.00	-19.48	L1	GND
0.734	FINAL	---	16.89	46.00	-29.11	L1	GND
0.747	FINAL	36.06	---	56.00	-19.94	L1	GND
4.471	FINAL	35.17	---	56.00	-20.83	L1	GND
4.478	FINAL	---	22.27	46.00	-23.73	L1	GND
16.443	FINAL	---	12.37	50.00	-37.63	L1	GND
16.445	FINAL	17.43	---	60.00	-42.57	L1	GND

Table 7-44. AC Line Conducted Data with 802.11ax CDD (RU242) Ch.6 (L1, with Adapter)

FCC ID: BCGA2567 IC: 579C-A2567	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080048-02.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device	Page 155 of 157

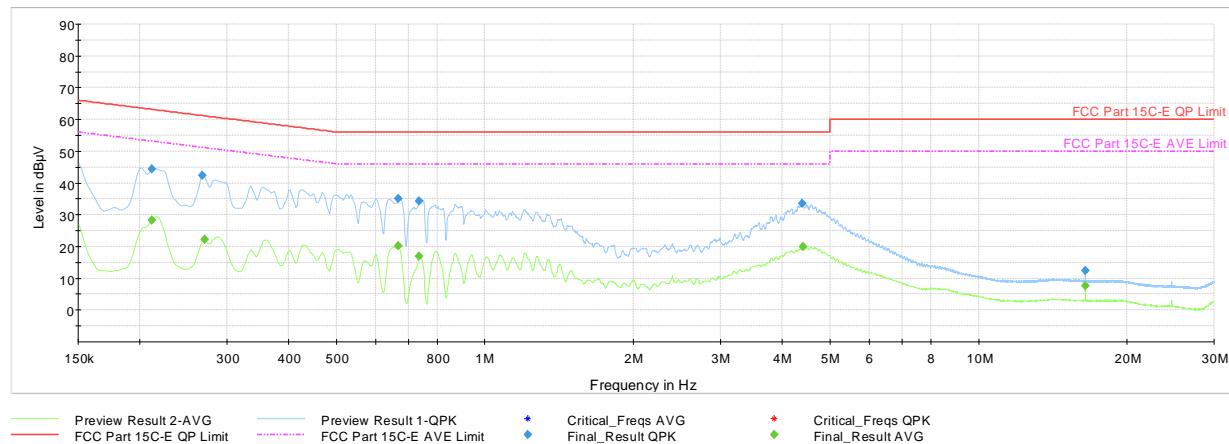

Plot 7-206. AC Line Conducted Emissions with 802.11ax CDD (RU242) Ch.6 (N, with Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.212	FINAL	---	28.22	53.15	-24.93	N	GND
0.212	FINAL	44.49	---	63.15	-18.66	N	GND
0.268	FINAL	42.47	---	61.19	-18.72	N	GND
0.270	FINAL	---	22.21	51.12	-28.91	N	GND
0.668	FINAL	---	20.21	46.00	-25.79	N	GND
0.668	FINAL	35.03	---	56.00	-20.97	N	GND
0.736	FINAL	34.45	---	56.00	-21.55	N	GND
0.736	FINAL	---	16.85	46.00	-29.15	N	GND
4.397	FINAL	33.57	---	56.00	-22.43	N	GND
4.401	FINAL	---	19.88	46.00	-26.12	N	GND
16.439	FINAL	---	7.75	50.00	-42.25	N	GND
16.439	FINAL	12.48	---	60.00	-47.52	N	GND

Table 7-45. AC Line Conducted Data with 802.11ax CDD (RU242) Ch.6 (N, with Adapter)

FCC ID: BCGA2567 IC: 579C-A2567	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2106080048-02.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device		Page 156 of 157

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device** **FCC ID: BCGA2567, IC: 579C-A2567** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA2567 IC: 579C-A2567	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2106080048-02.BCG	Test Dates: 6/2/2021 - 8/7/2021	EUT Type: Tablet Device	Page 157 of 157