



PART 96 MEASUREMENT REPORT

Applicant Name:

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

6/2/2021 - 8/20/2021

Test Site/Location:

PCTEST Morgan Hill, CA, USA

Test Report Serial No.:

1C2106080049-07-R1.BCG

FCC ID:

BCGA2568

APPLICANT:

Apple Inc.

Application Type:

Certification

Model:

A2568(A2569)

EUT Type:

Tablet Device

FCC Classification:

Citizens Band End User Devices (CBE)

FCC Rule Part(s):

96


Test Procedure(s):


ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01, KDB 940660 D01 v03, WINNF-TS-0122 v1.0.2

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1C2106080049-07-R1.BCG Report SNs) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.


I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



 Randy Ortanez
 President


FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 1 of 86


T A B L E O F C O N T E N T S

1.0	INTRODUCTION	4
1.1	Scope	4
1.2	PCTEST Test Location.....	4
1.1	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Antenna Description	6
2.4	Test Support Equipment.....	6
2.5	Test Configuration	7
2.6	Software and Firmware	7
2.7	EMI Suppression Device(s)/Modifications	7
3.0	DESCRIPTION OF TESTS	8
3.1	Measurement Procedure.....	8
3.2	Radiated Spurious Emissions	8
4.0	MEASUREMENT UNCERTAINTY	9
5.0	TEST EQUIPMENT CALIBRATION DATA	10
6.0	SAMPLE CALCULATIONS	11
7.0	TEST RESULTS.....	12
7.1	Summary.....	12
7.2	Occupied Bandwidth	14
7.3	Spurious and Harmonic Emissions at Antenna Terminal	31
7.4	Band Edge Emissions at Antenna Terminal	45
7.5	Additional Maximum Power Reduction (A-MPR).....	54
7.6	Radiated Power (EIRP).....	56
7.7	Radiated Spurious Emissions	66
7.8	Frequency Stability / Temperature Variation	78
7.9	End User Device Additional Requirement (CBSD Protocol).....	83
8.0	CONCLUSION.....	86

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 2 of 86




PART 96 MEASUREMENT REPORT



Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	OBW [MHz]	EIRP		Emission Designator
					Max. Power [W]	Max. Power [dBm]	
LTE Band 48	5 MHz	QPSK	3552.5 - 3697.5	4.5251	0.158	22.00	4M53G7W
		16QAM	3552.5 - 3697.5	4.5027	0.117	20.67	4M50D7W
		64QAM	3552.5 - 3697.5	4.5147	0.089	19.51	4M51D7W
		256QAM	3552.5 - 3697.5	4.5144	0.047	16.74	4M51D7W
	10 MHz	QPSK	3555.0 - 3695.0	8.9985	0.158	22.00	9M00G7W
		16QAM	3555.0 - 3695.0	9.0147	0.130	21.13	9M01D7W
		64QAM	3555.0 - 3695.0	9.0295	0.082	19.12	9M03D7W
		256QAM	3555.0 - 3695.0	9.0411	0.046	16.59	9M04D7W
	15 MHz	QPSK	3557.5 - 3692.5	13.4915	0.158	22.00	13M5G7W
		16QAM	3557.5 - 3692.5	13.4710	0.131	21.18	13M5D7W
		64QAM	3557.5 - 3692.5	13.5240	0.079	18.99	13M5D7W
		256QAM	3557.5 - 3692.5	13.4807	0.048	16.79	13M5D7W
	20 MHz	QPSK	3560.0 - 3690.0	17.9210	0.158	22.00	17M9G7W
		16QAM	3560.0 - 3690.0	17.9280	0.135	21.30	17M9D7W
		64QAM	3560.0 - 3690.0	17.9830	0.084	19.26	18M0D7W
		256QAM	3560.0 - 3690.0	17.9741	0.047	16.76	18M0D7W
LTE ULCA Band 48	20 + 5 MHz	QPSK	3562.5 - 3687.5	23.0193	0.166	22.20	23M0G7W
		16QAM	3562.5 - 3687.5	22.9845	0.084	19.24	23M0D7W
		64QAM	3562.5 - 3687.5	22.9685	0.076	18.78	23M0D7W
		256QAM	3562.5 - 3687.5	22.9484	0.053	17.24	22M9D7W
	20 + 10 MHz	QPSK	3565.0 - 3685.0	27.8071	0.163	22.12	27M8G7W
		16QAM	3565.0 - 3685.0	27.8013	0.084	19.24	27M8D7W
		64QAM	3565.0 - 3685.0	27.8505	0.070	18.43	27M9D7W
		256QAM	3565.0 - 3685.0	27.7970	0.055	17.37	27M8D7W
	20 + 15 MHz	QPSK	3567.5 - 3682.5	32.7656	0.161	22.06	32M8G7W
		16QAM	3567.5 - 3682.5	32.8401	0.083	19.17	32M8D7W
		64QAM	3567.5 - 3682.5	32.7112	0.077	18.86	32M7D7W
		256QAM	3567.5 - 3682.5	32.7497	0.052	17.14	32M7D7W
	20 + 20 MHz	QPSK	3570.0 - 3680.0	37.6976	0.161	22.07	37M7G7W
		16QAM	3570.0 - 3680.0	37.6698	0.082	19.16	37M7D7W
		64QAM	3570.0 - 3680.0	37.7802	0.066	18.21	37M8D7W
		256QAM	3570.0 - 3680.0	37.6946	0.054	17.34	37M7D7W

EUT Overview

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 3 of 86

INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.


1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.1 Test Facility / Accreditations

Measurements were performed at PCTEST located in Morgan Hill, CA 95037, U.S.A.

- PCTEST is a CBRS Alliance (OnGo) Approved Test Lab
- PCTEST is a WinnForum Approved Test Lab
- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for CBRS Alliance Certification Test Plan and WinnForum Conformance and Performance Test Technical Standard.
- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 4 of 86

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID:BCGA2568**. The test data contained in this report pertains only to the emissions due to the EUT's LTE Band 48 operation in the CBRs band. Per FCC Part 96, this device is evaluated under Citizens Band End User Devices (CBE).

Test Device Serial No.: DG7QPQX0RY, GL6FX203DX, DLX121200630NC43Y, PG712Q9F24

2.2 Device Capabilities

This device contains the following capabilities:

WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR (FR1), 802.11b/g/n/ax WLAN, 802.11a/n/ax UNII, Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8), WPT

This device supports BT Beamforming


ULCA LTE Band 48 supports NS10 for Antenna 3a, Antenna 2, Antenna 4, and Antenna 1a.

This device supports simultaneous transmission operations, which allows for multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

Antenna	Simultaneous Tx Config	WLAN	Bluetooth	WCDMA	LTE / FR1 NR			UNII
		802.11 b/g/n/ax	BDR, EDR, HDR4/8, LE1/2M	Mid Band	Mid Band	High Band	Ultra High Band	802.11 a/n/ac/ax
3a	Config 1	✓	✗	✗	✗	✗	✓	✗
3a	Config 2	✗	✓	✗	✗	✗	✓	✗
3b	Config 3	✗	✗	✗	✗	✓	✗	✓
3b	Config 4	✗	✗	✗	✓	✗	✗	✓
3b	Config 5	✗	✗	✓	✗	✗	✗	✓
3a	Config 6	✗	✓	✗	✗	✗	✓	✗
3b	Config 7	✗	✗	✗	✗	✓	✗	✓
3b	Config 8	✗	✗	✗	✓	✗	✗	✓

Table 2-1. Simultaneous Transmission Configurations

✓ = Support; ✗ = Not Support

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
Page 5 of 86		

2.3 Antenna Description

Following antenna gains provided by manufacturer were used for testing.


Band	Antennas			
	Antenna 3a	Antenna 2	Antenna 4	Antenna 1a
LTE Band 48	2.6	1.7	2.1	2.6

Table 2-2. Highest Antenna Gain

2.4 Test Support Equipment

1	Apple MacBook Pro	Model:	A2141	S/N:	C02DV7VKMD6T
	w/AC/DC Adapter	Model:	A2166	S/N:	N/A
2	Apple USB-C Cable	Model:	Chimp	S/N:	420A57
3	USB-C Cable	Model:	A146	S/N:	N/A
	w/ AC/DC Adapter	Model:	A2305	S/N:	N/A
4	Apple Pencil	Model:	N/A	S/N:	GQXYGSXBJKM9
5	DC Power Supply	Model:	KPS3010D	S/N:	N/A
6	LTE Access Point	Model:	Q710	S/N:	991929000125
7	Dell Laptop (Local SAS - WINNForum Test Harness	Model:	A2217	S/N:	C39Z600ANXM2

Table 2-3. Test Support Equipment

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 6 of 86

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.26 2015, TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

All possible simultaneous transmission configurations have been investigated and the worst case config has been reported.

Description	LTE (Band 48)	Bluetooth
Antenna	Antenna 3a	Antenna 3a
Channel	55340	78
Operating Frequency (MHz)	3560	2480
Mode/Modulation	QPSK/1RB/20MHz	BDR/GFSK/ePA


Table 2-4. Worst Case Simultaneous Transmission Configuration

2.6 Software and Firmware

The test was conducted with firmware version 19A310b installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 7 of 86

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The measurement procedures described in the document titled "Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards" (ANSI C63.26-2015, TIA-603-E-2016) and "Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems" (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:

$$E_{[\text{dB}\mu\text{V/m}]} = \text{Measured amplitude level}_{[\text{dBm}]} + 107 + \text{Cable Loss}_{[\text{dB}]} + \text{Antenna Factor}_{[\text{dB/m}]}$$



And

$$\text{EIRP}_{[\text{dBm}]} = E_{[\text{dB}\mu\text{V/m}]} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014.

Per KDB 414788 D01 v01r01, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.


Radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015 and TIA-603-E-2016.

FCC ID: BCGA2568	 PCTEST Proud to be part of 	PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 8 of 86

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.65
Radiated Disturbance (<30MHz)	4.06
Radiated Disturbance (30MHz-1GHz)	4.30
Radiated Disturbance (1-18GHz)	4.78
Radiated Disturbance (>18GHz)	4.79

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 9 of 86

5.0 TEST EQUIPMENT CALIBRATION DATA


Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	3/31/2021	Annual	3/31/2022	MY49430244
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	12/1/2020	Annual	12/1/2021	T058701-02
ETS-Lindgren	3142E	BiConiLog Antenna (30MHz - 6GHz)	9/15/2020	Annual	9/15/2021	208204
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	11/4/2020	Annual	11/4/2021	227597
ESPEC	SU-241	Tabletop Temperature Chamber	9/28/2020	Annual	9/28/2021	92009574
ETS-Lindgren	3142E	BiConiLog Antenna (30MHz - 6GHz)	9/15/2020	Annual	9/15/2021	208204
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	11/4/2020	Annual	11/4/2021	227597
Keysight Technology	N9040B	UXA Signal Analyzer	12/19/2020	Annual	12/19/2021	MY57212015
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	12/3/2020	Annual	12/3/2021	102327
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	12/3/2020	Annual	12/3/2021	101648
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	3/16/2021	Annual	3/16/2022	101619
Rohde & Schwarz	ESW26	EMI Test Receiver	6/11/2021	Annual	6/11/2022	101299
Rohde & Schwarz	ESW44	EMI Test Receiver	12/14/2020	Annual	12/14/2021	101867
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	10/13/2020	Annual	10/13/2021	161616
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	9/24/2020	Annual	9/24/2021	151888
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	4/29/2021	Annual	4/29/2022	100051
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Antenna (400MHz-18GHz)	10/2/2020	Annual	10/2/2021	101063
Rohde & Schwarz	HFH2-Z2	Loop Antenna	4/5/2021	Annual	4/5/2022	100519

Table 5-1. Test Equipment

Notes:

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 10 of 86

6.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7W

BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination of Any

QAM Modulation

Emission Designator = 8M45D7W

BW = 8.45 MHz

D = Amplitude/Angle Modulated


7 = Quantized/Digital Info

W = Combination of Any

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 11 of 86


7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
FCC ID: BCGA2568
FCC Classification: Citizens Band End User Devices (CBE)
Mode(s): LTE/ULCA


Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Occupied Bandwidth	2.1049	N/A	N/A	Section 7.2
	Conducted Band Edge / Spurious Emissions	2.1051, 96.41(e)(ii)	-13 dBm/MHz at frequencies within 0-B MHz of channel edge (where B is the bandwidth of the assigned channel) -25 dBm/MHz at frequencies greater than B MHz above and below channel edge -40 dBm/MHz at frequencies below 3530 MHz and above 3720 MHz	PASS	Sections 7.3, 7.4
	Transmitter Conducted Output Power	2.1046	N/A	N/A	See RF Exposure Report
	Additional Maximum Power Reduction (A-MPR)	2.1046	N/A	N/A	Section 7.5
	Frequency Stability	2.1055	Fundamental emissions stay within authorized frequency block	PASS	Section 7.8
	End User Device Additional Requirements (CBSD Protocol)	96.47	End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation. An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.	PASS	Section 7.9
	Equivalent Isotropic Radiated Power (EIRP)	96.41(b)	23 dBm/10MHz	PASS	Section 7.6
RADIATED	Radiated Spurious Emissions	2.1053, 96.41(e)	-40 dBm/MHz	PASS	Section 7.7

Table 7-1. Summary of Test Results

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 12 of 86

Notes:

1. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
2. The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
3. All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
4. All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized was PCTEST EMC Software Tool 1.0.

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 13 of 86

7.2 Occupied Bandwidth

\$2.1049

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section. All ports were tested and only the worst case data were reported.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.





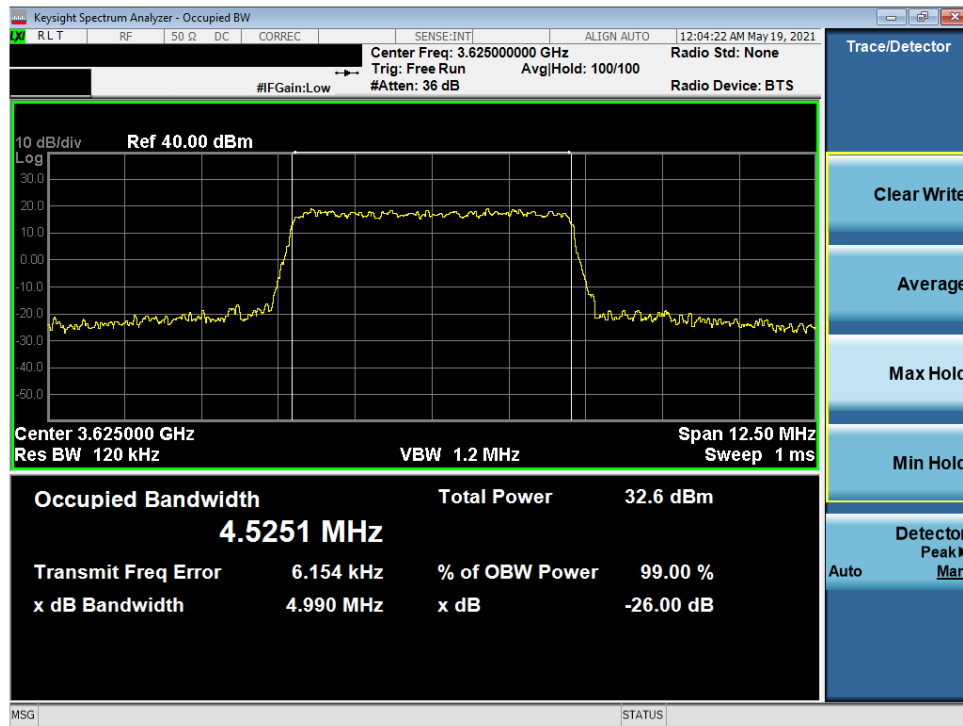
Figure 7-1. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 14 of 86

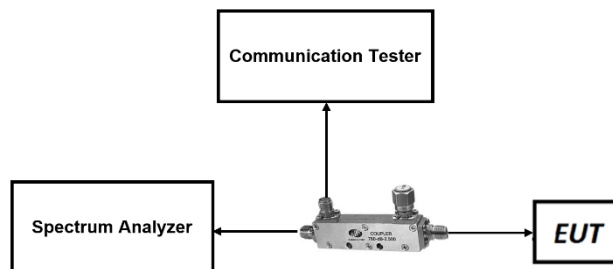LTE Band 48




Plot 7-1. Occupied Bandwidth Plot (LTE Band 48 - 5MHz QPSK - Full RB Configuration)

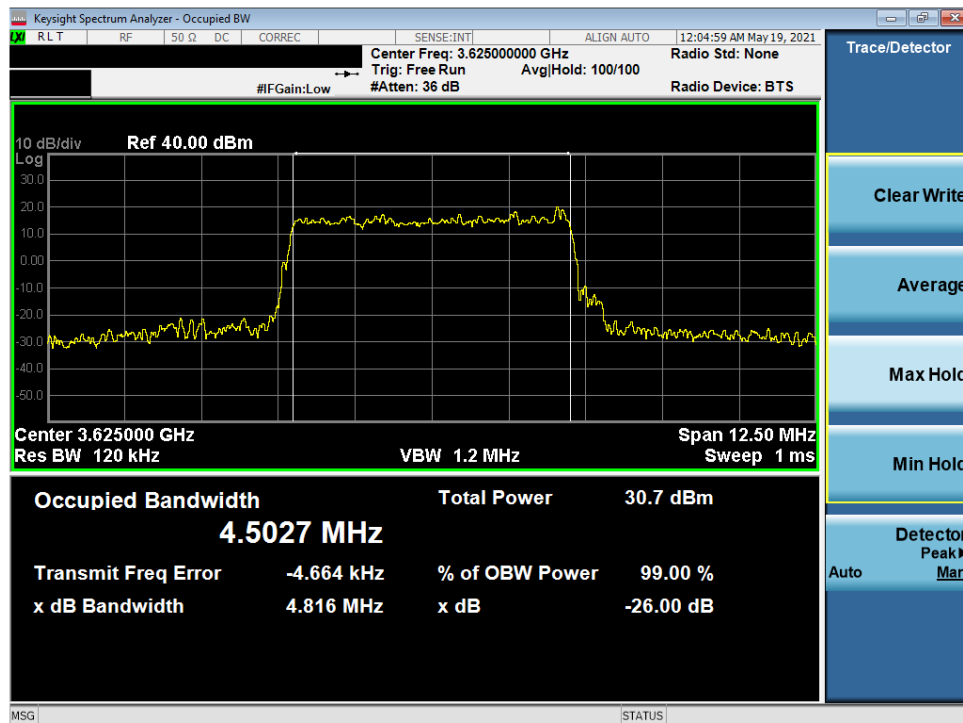


Plot 7-2. Occupied Bandwidth Plot (LTE Band 48 - 5MHz 16-QAM - Full RB Configuration)


FCC ID: BCGA2568	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 15 of 86

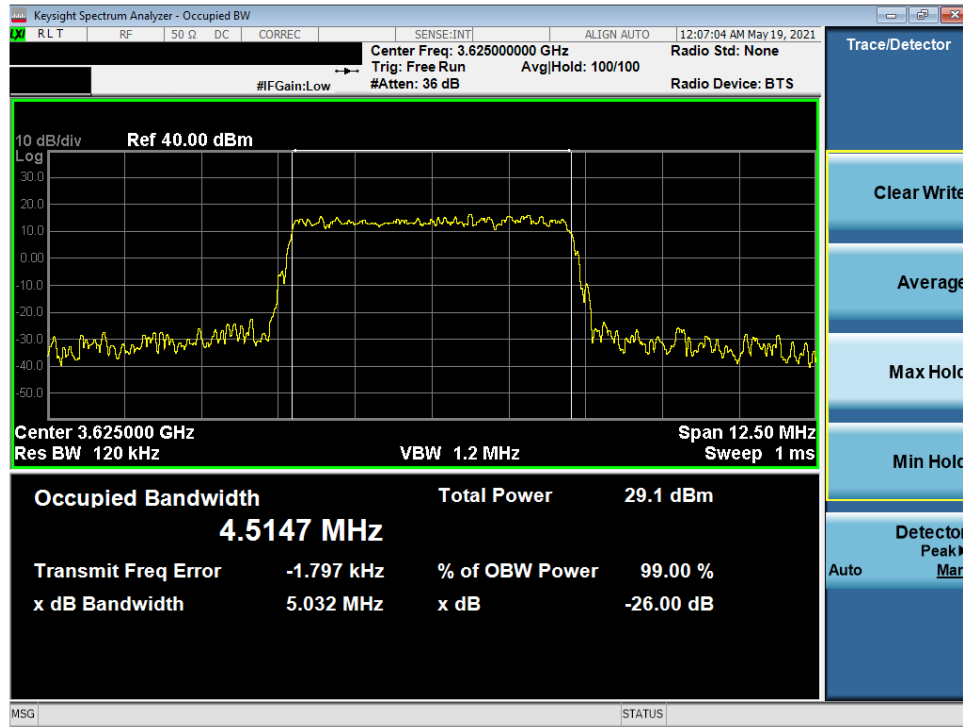


Plot 7-3. Occupied Bandwidth Plot (LTE Band 48 - 5MHz 64-QAM - Full RB Configuration)

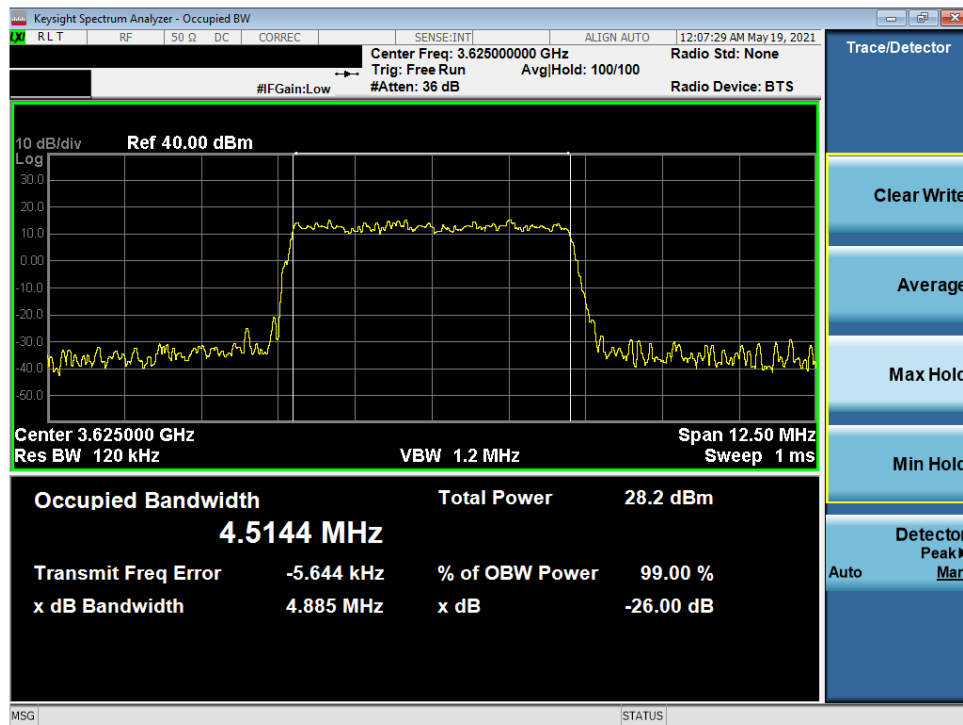


Plot 7-4. Occupied Bandwidth Plot (LTE Band 48 - 5MHz 256-QAM - Full RB Configuration)


FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 16 of 86

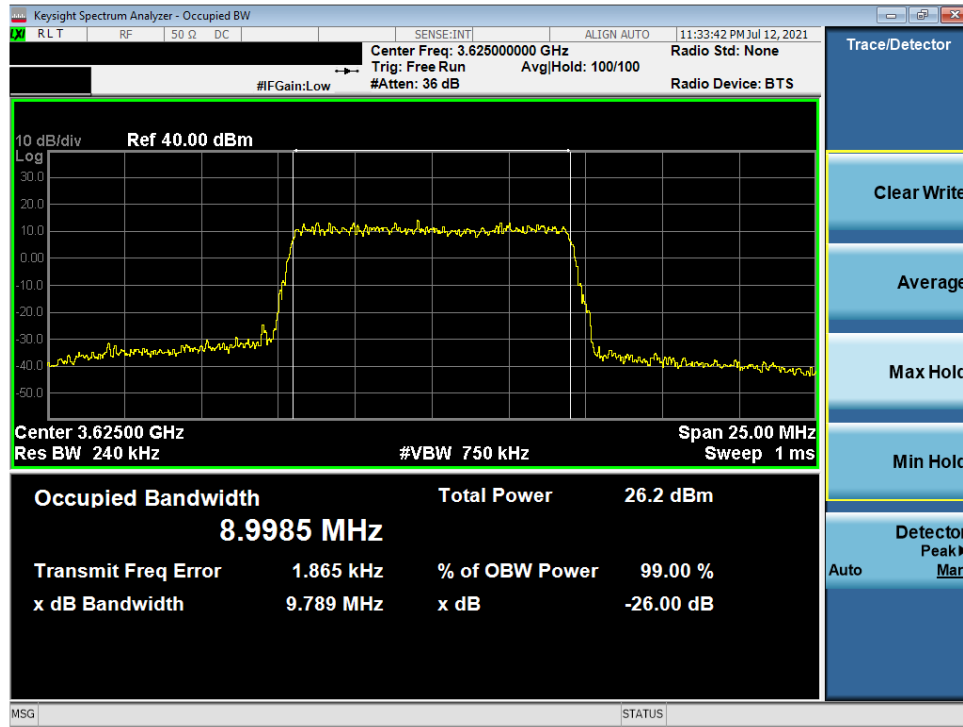


Plot 7-5. Occupied Bandwidth Plot (LTE Band 48 - 10MHz QPSK - Full RB Configuration)

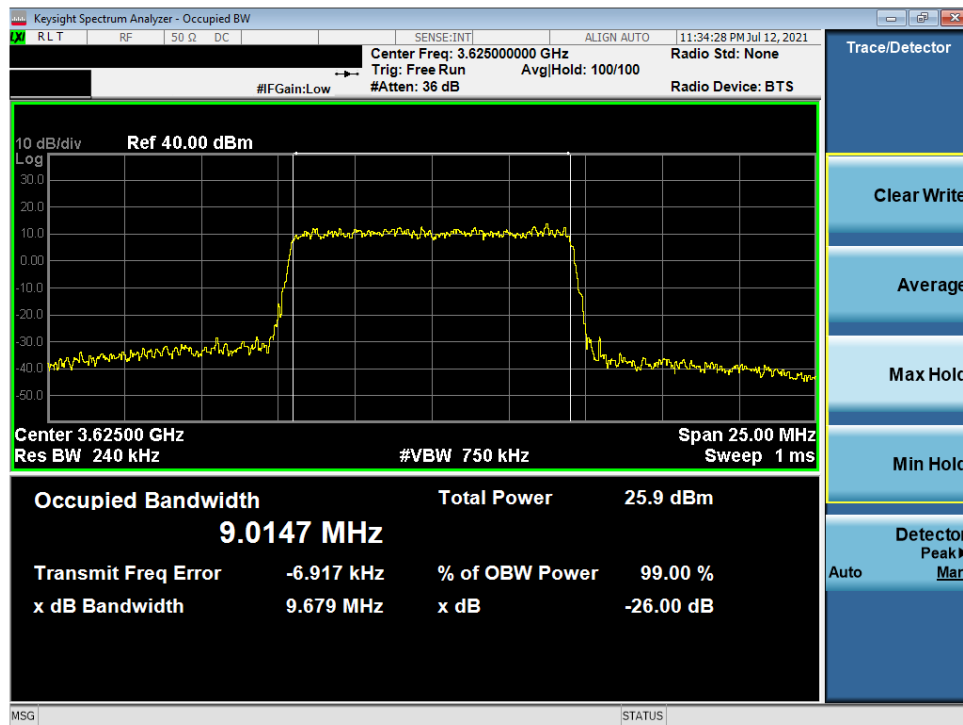


Plot 7-6. Occupied Bandwidth Plot (LTE Band 48 - 10MHz 16-QAM - Full RB Configuration)


FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 17 of 86

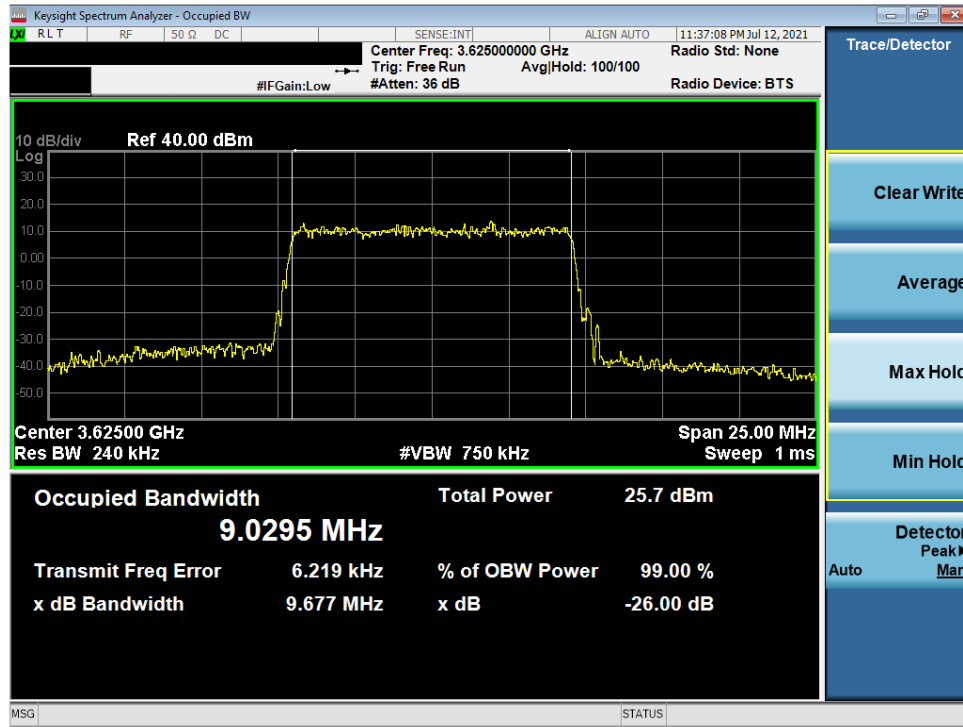


Plot 7-7. Occupied Bandwidth Plot (LTE Band 48 - 10MHz 64-QAM - Full RB Configuration)

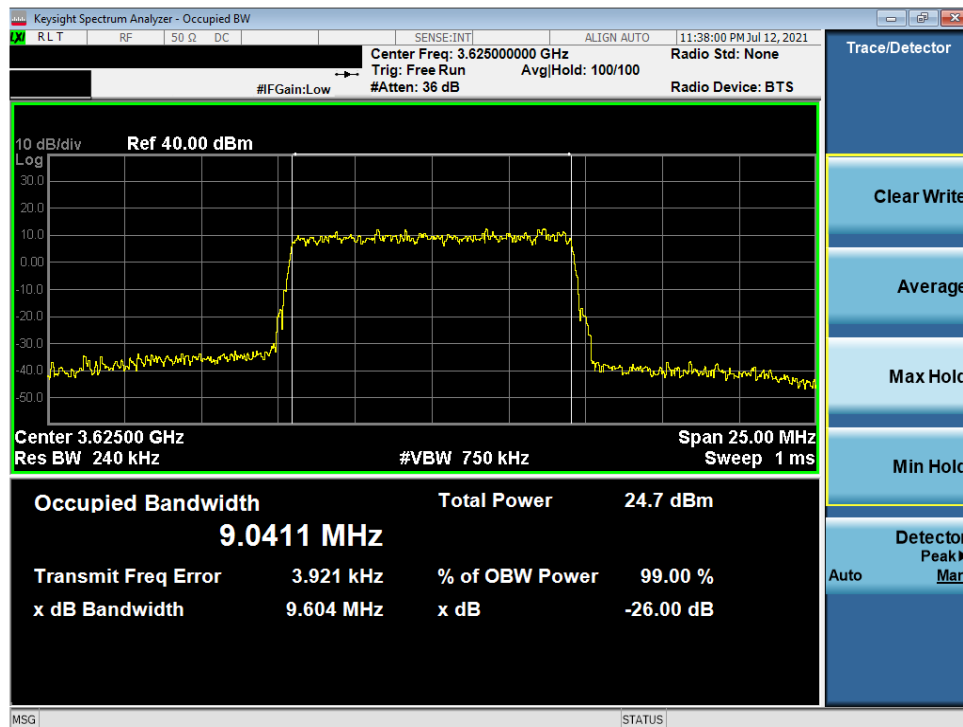


Plot 7-8. Occupied Bandwidth Plot (LTE Band 48 - 10MHz 256-QAM - Full RB Configuration)


FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 18 of 86

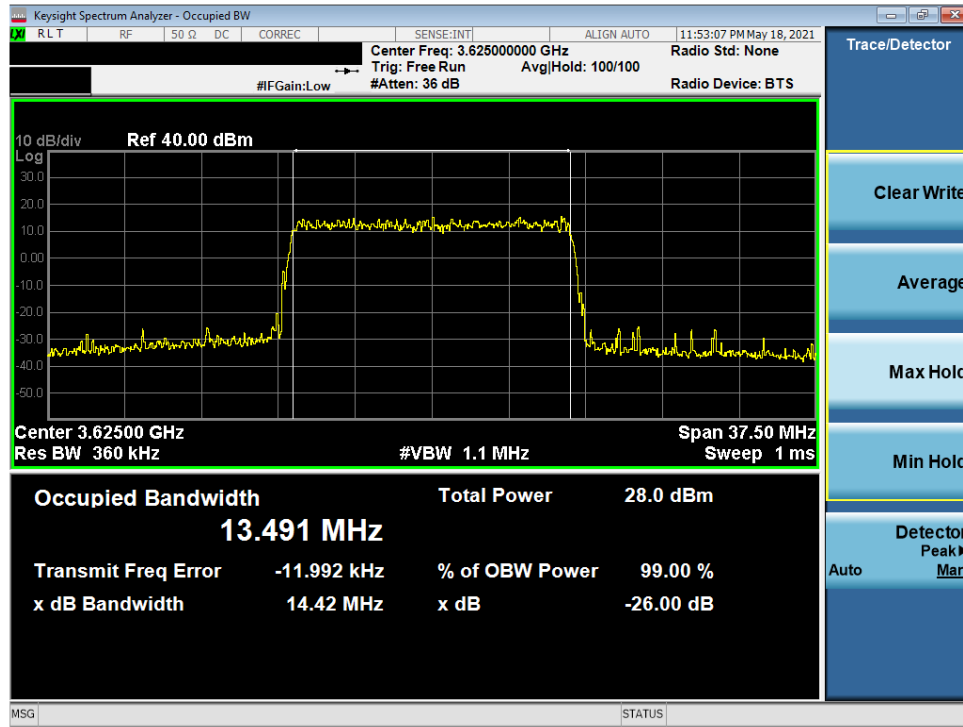


Plot 7-9. Occupied Bandwidth Plot (LTE Band 48 - 15MHz QPSK - Full RB Configuration)

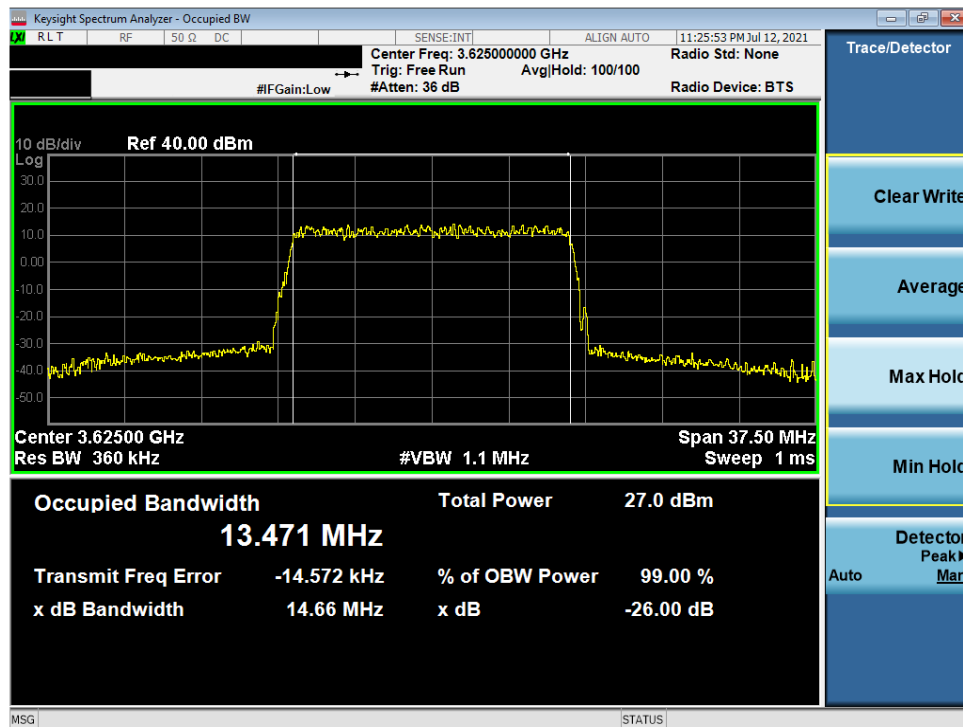


Plot 7-10. Occupied Bandwidth Plot (LTE Band 48 - 15MHz 16-QAM - Full RB Configuration)


FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 19 of 86

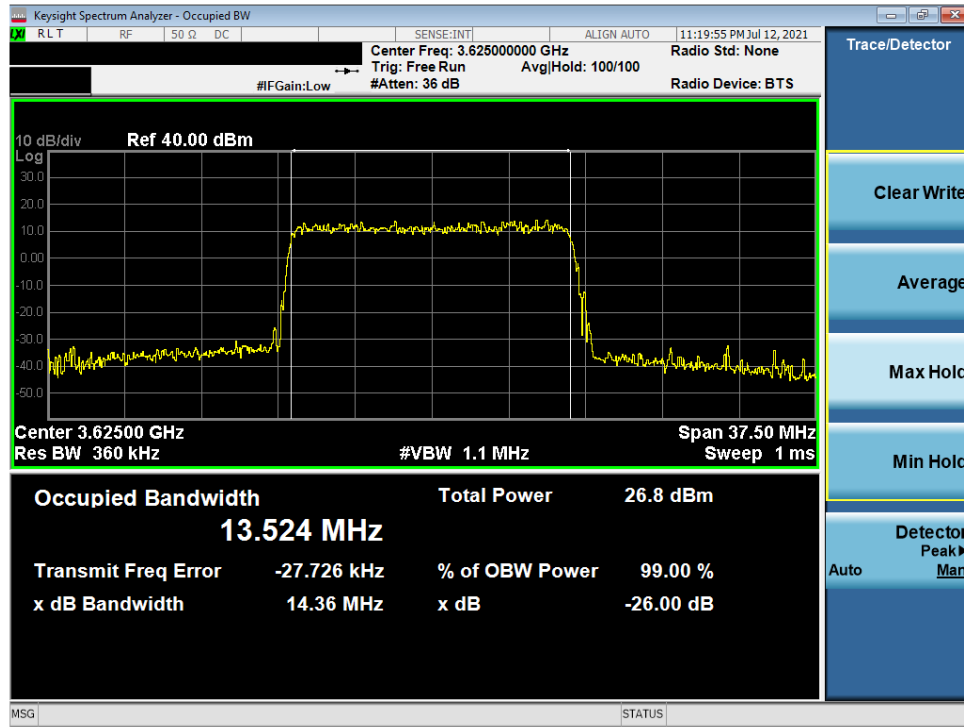


Plot 7-11. Occupied Bandwidth Plot (LTE Band 48 - 15MHz 64-QAM - Full RB Configuration)

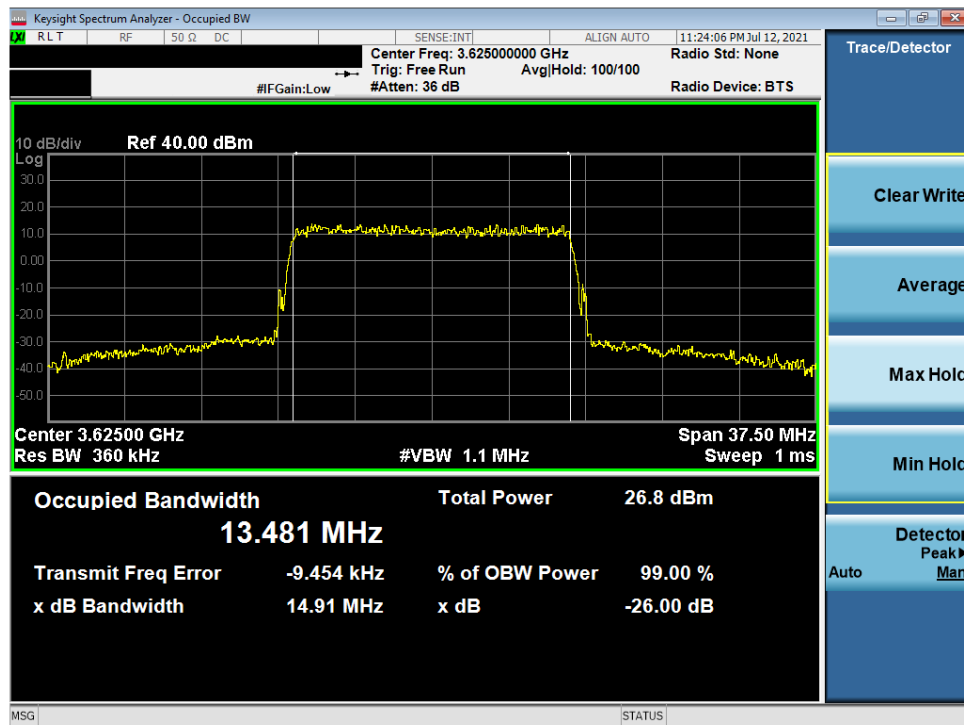


Plot 7-12. Occupied Bandwidth Plot (LTE Band 48 - 15MHz 256-QAM - Full RB Configuration)


FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 20 of 86

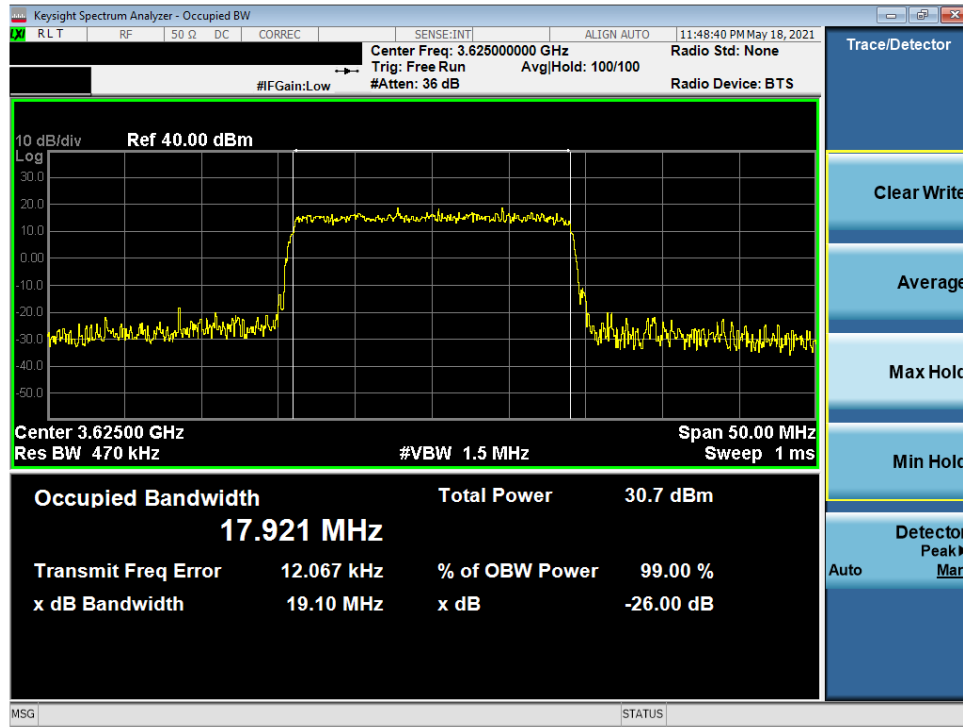


Plot 7-13. Occupied Bandwidth Plot (LTE Band 48 - 20MHz QPSK - Full RB Configuration)

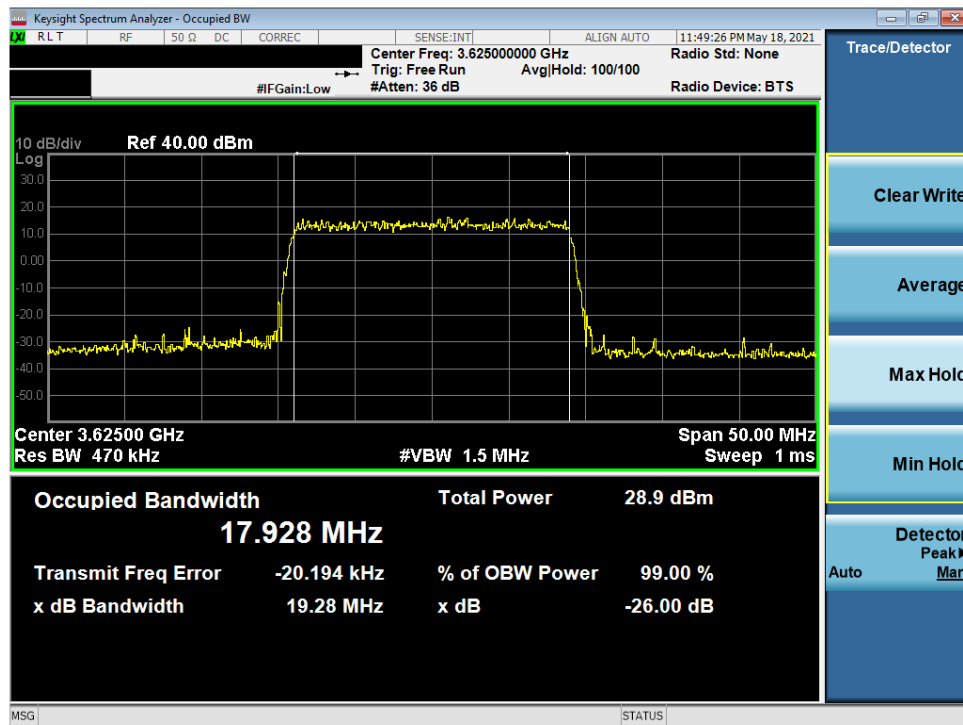


Plot 7-14. Occupied Bandwidth Plot (LTE Band 48 - 20MHz 16-QAM - Full RB Configuration)


FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 21 of 86

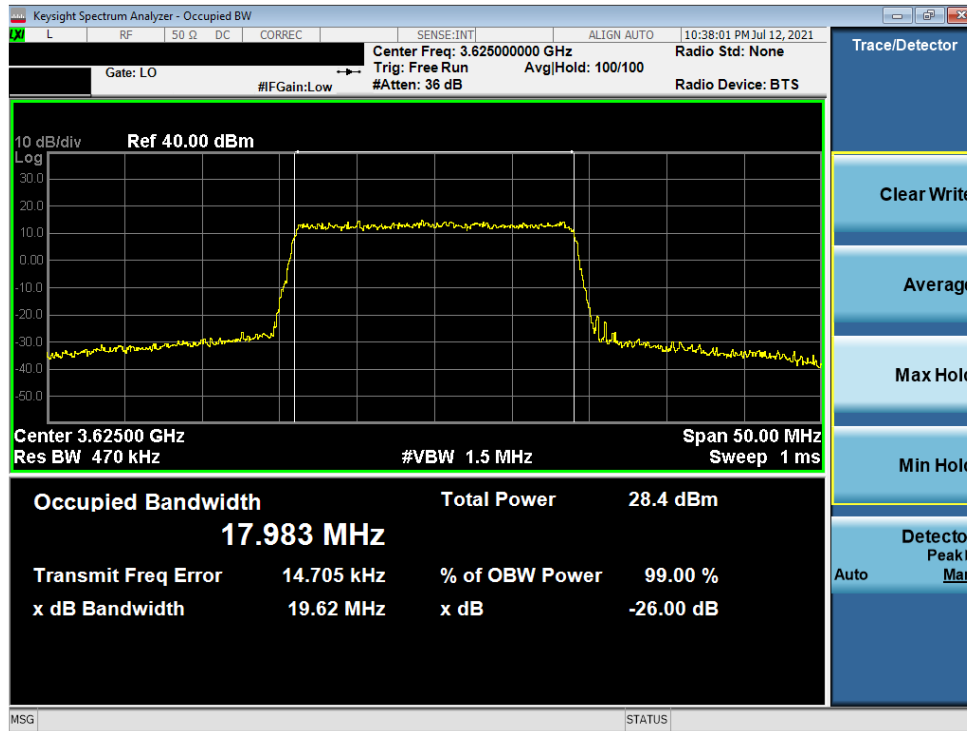


Plot 7-15. Occupied Bandwidth Plot (LTE Band 48 - 20MHz 64-QAM - Full RB Configuration)

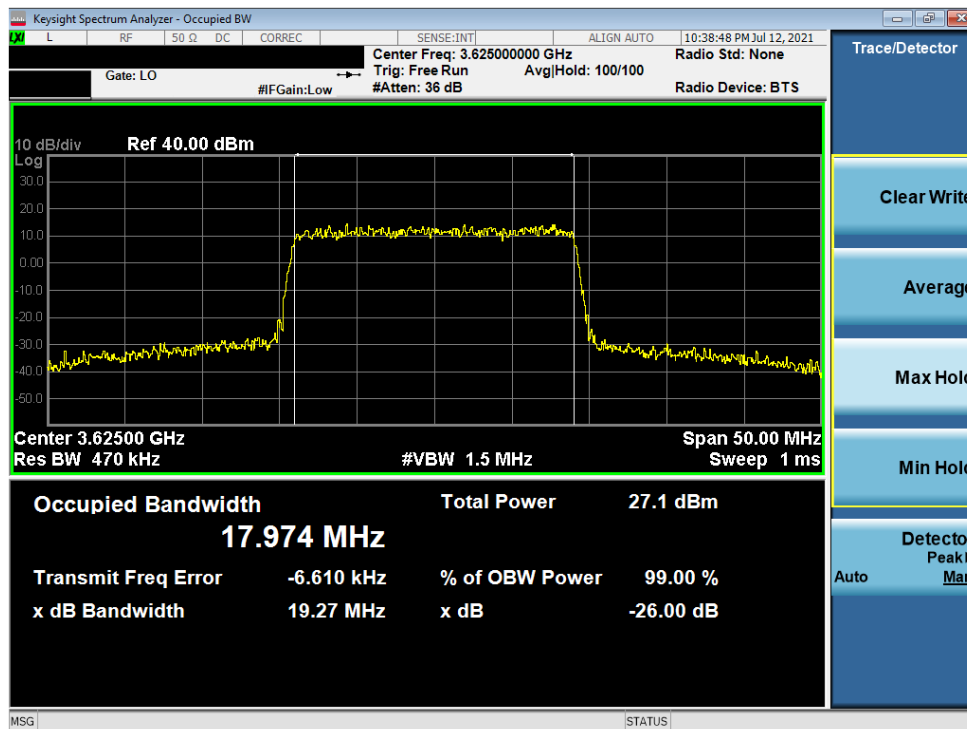


Plot 7-16. Occupied Bandwidth Plot (LTE Band 48 - 20MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 22 of 86

ULCA LTE Band 48

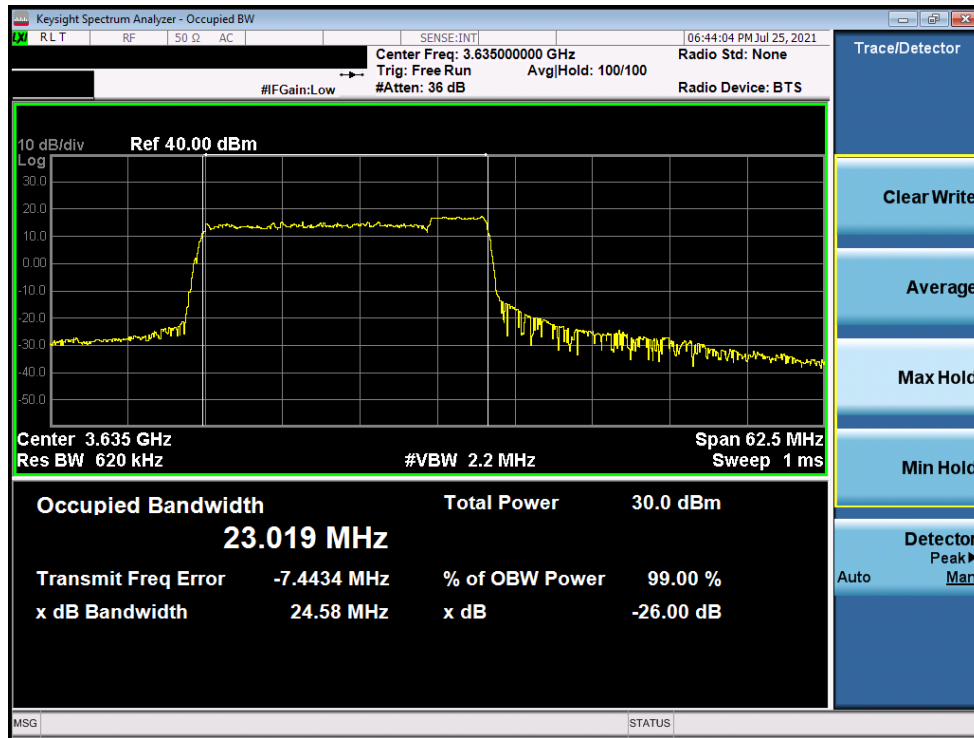


Plot 7-17. Occupied Bandwidth Plot (ULCA LTE Band 48 - 20+5MHz QPSK - Full RB Configuration)

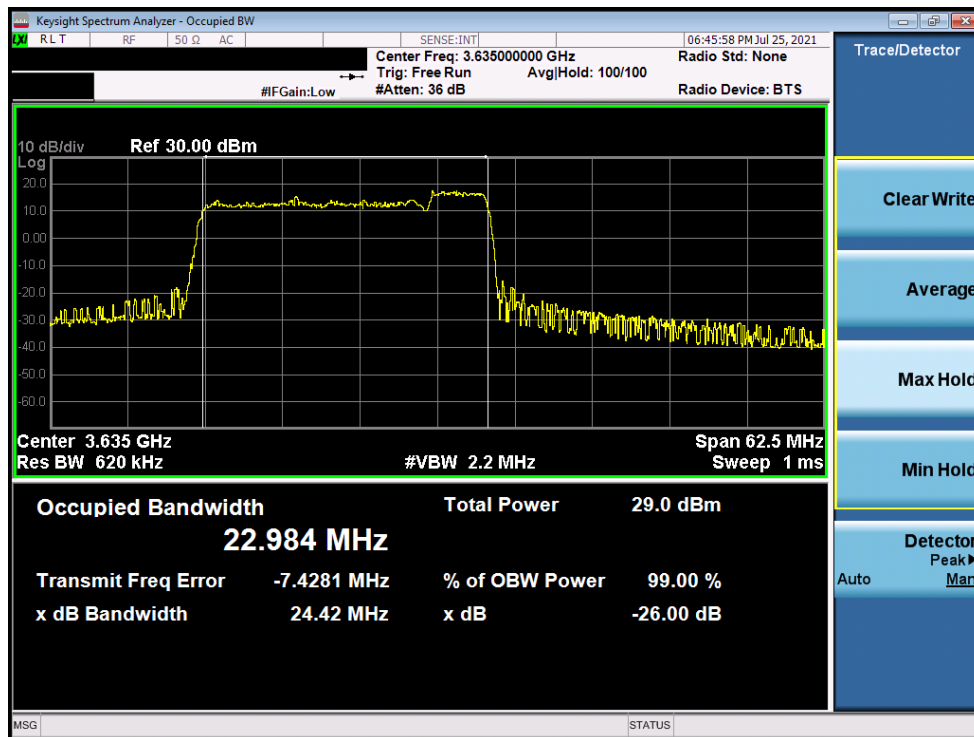


Plot 7-18. Occupied Bandwidth Plot (ULCA LTE Band 48 - 20+5MHz 16-QAM - Full RB Configuration)


FCC ID: BCGA2568	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 23 of 86

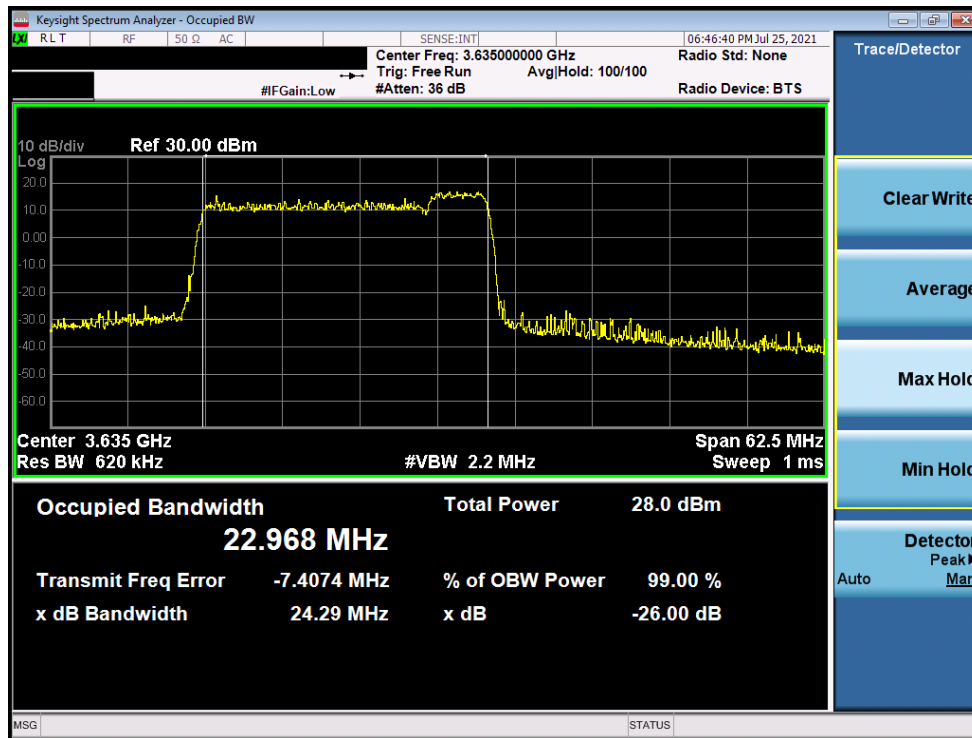


Plot 7-19. Occupied Bandwidth Plot (ULCA LTE Band 48 - 20+5MHz 64-QAM - Full RB Configuration)

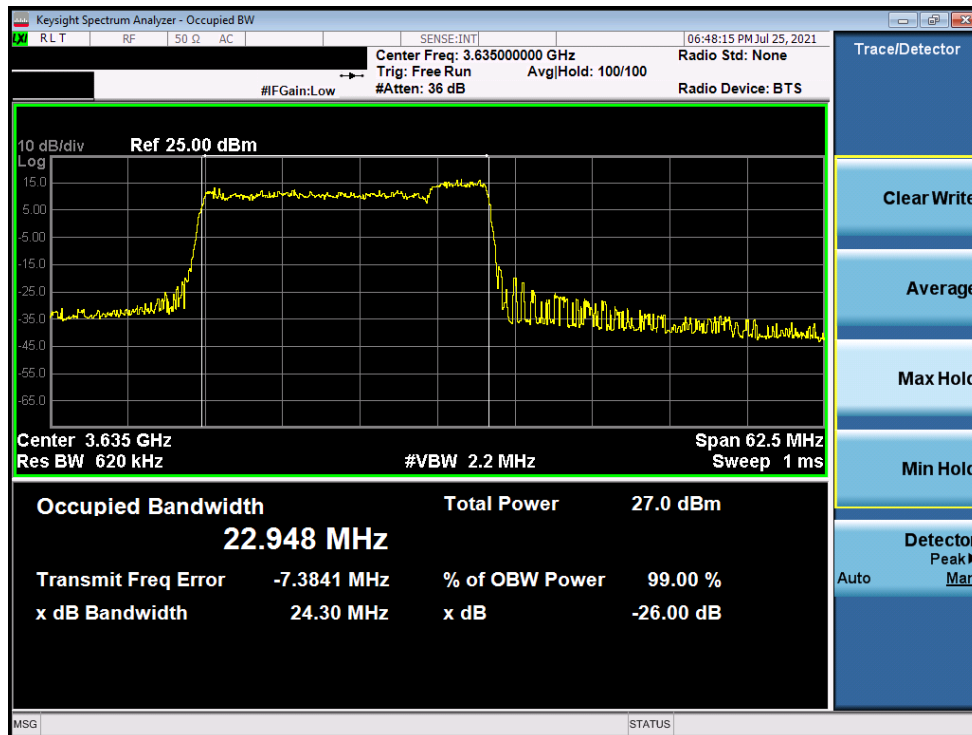


Plot 7-20. Occupied Bandwidth Plot (ULCA LTE Band 48 - 20+5MHz 256-QAM - Full RB Configuration)


FCC ID: BCGA2568	PCTEST Proud to be part of 	PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 24 of 86

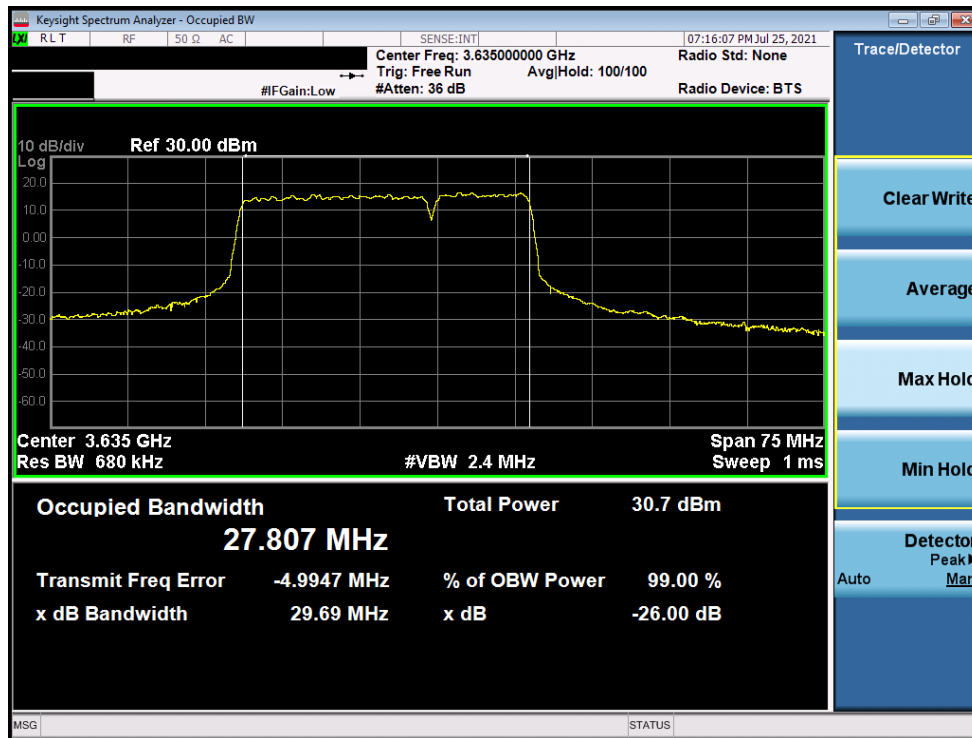


Plot 7-21. Occupied Bandwidth Plot (ULCA LTE Band 48 - 20+10MHz QPSK - Full RB Configuration)

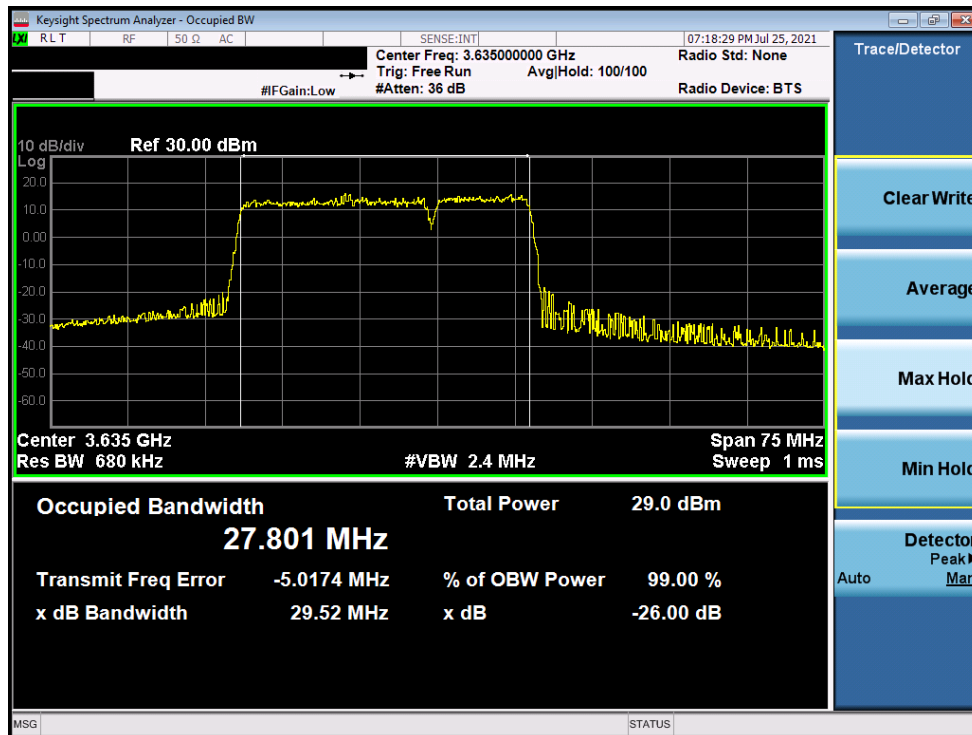


Plot 7-22. Occupied Bandwidth Plot (ULCA LTE Band 48 - 20+10MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 25 of 86

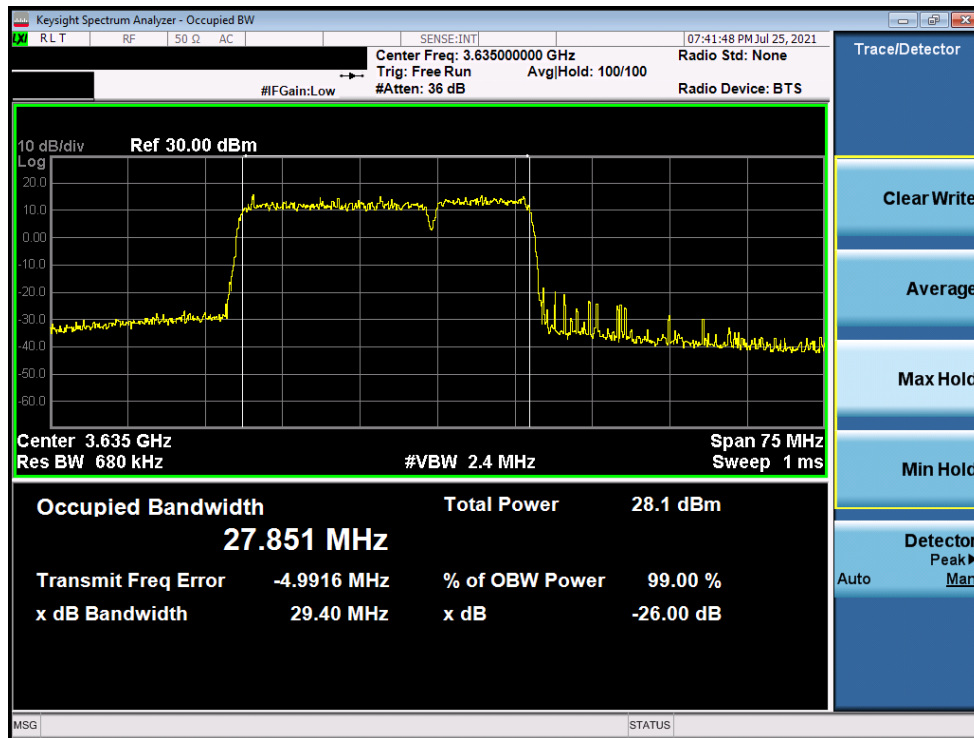


Plot 7-23. Occupied Bandwidth Plot (ULCA LTE Band 48 - 20+10MHz 64-QAM - Full RB Configuration)

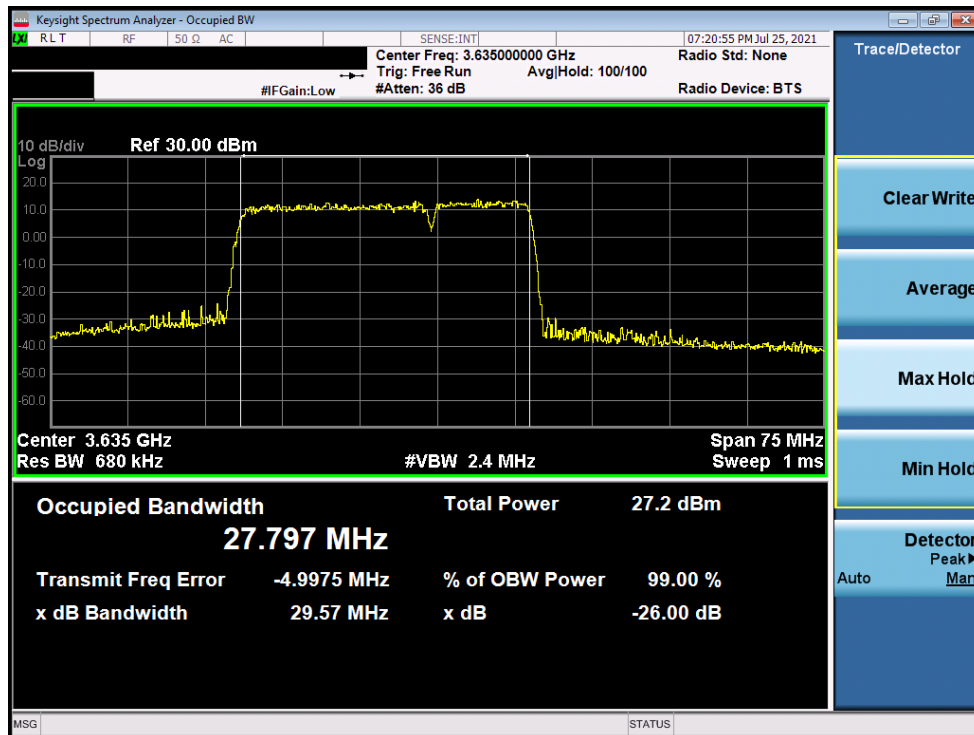

Plot 7-24. Occupied Bandwidth Plot (ULCA LTE Band 48 - 20+10MHz 256-QAM - Full RB Configuration)


FCC ID: BCGA2568	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 26 of 86

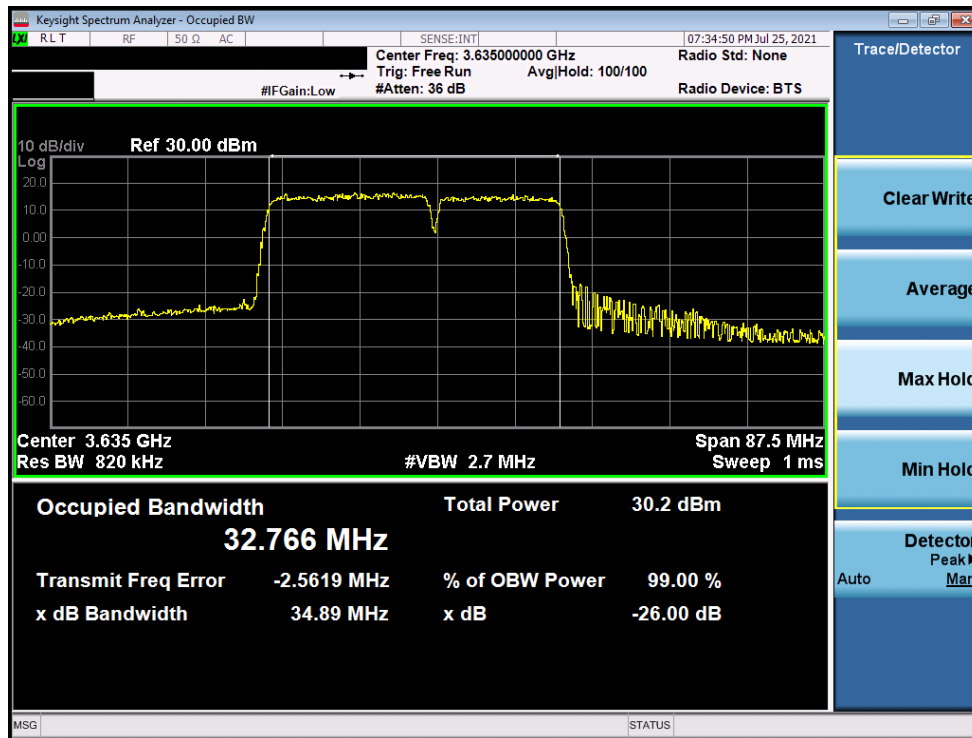


Plot 7-25. Occupied Bandwidth Plot (ULCA LTE Band 48 - 20+15MHz QPSK - Full RB Configuration)




Plot 7-26. Occupied Bandwidth Plot (ULCA LTE Band 48 - 20+15MHz 16-QAM - Full RB Configuration)


FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
Page 27 of 86		

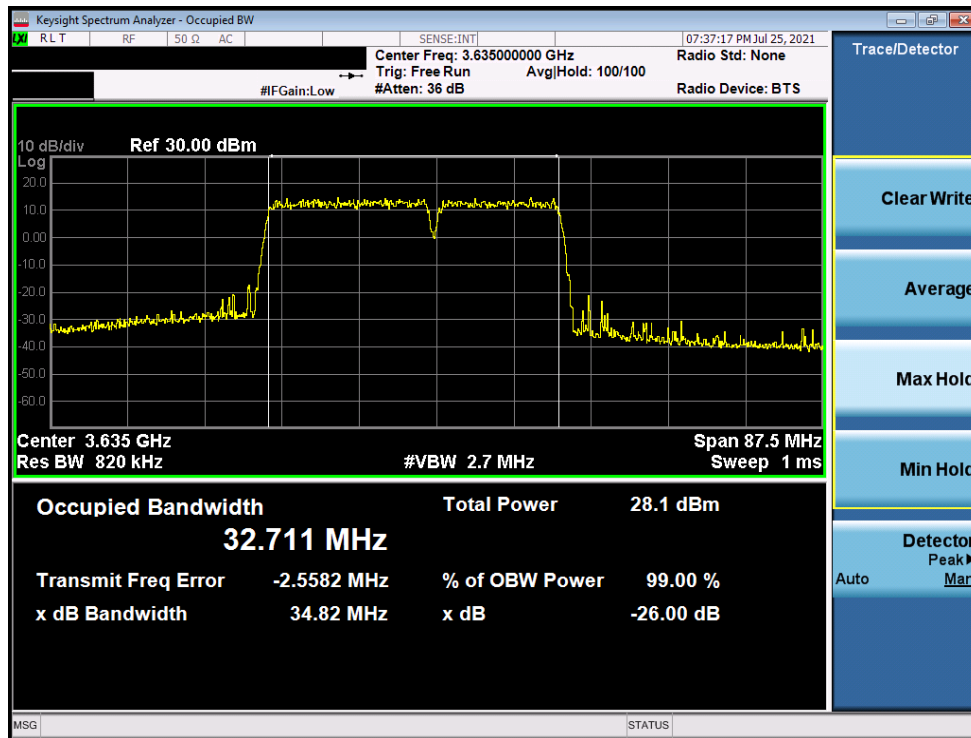

Plot 7-27. Occupied Bandwidth Plot (ULCA LTE Band 48 - 20+15MHz 64-QAM - Full RB Configuration)

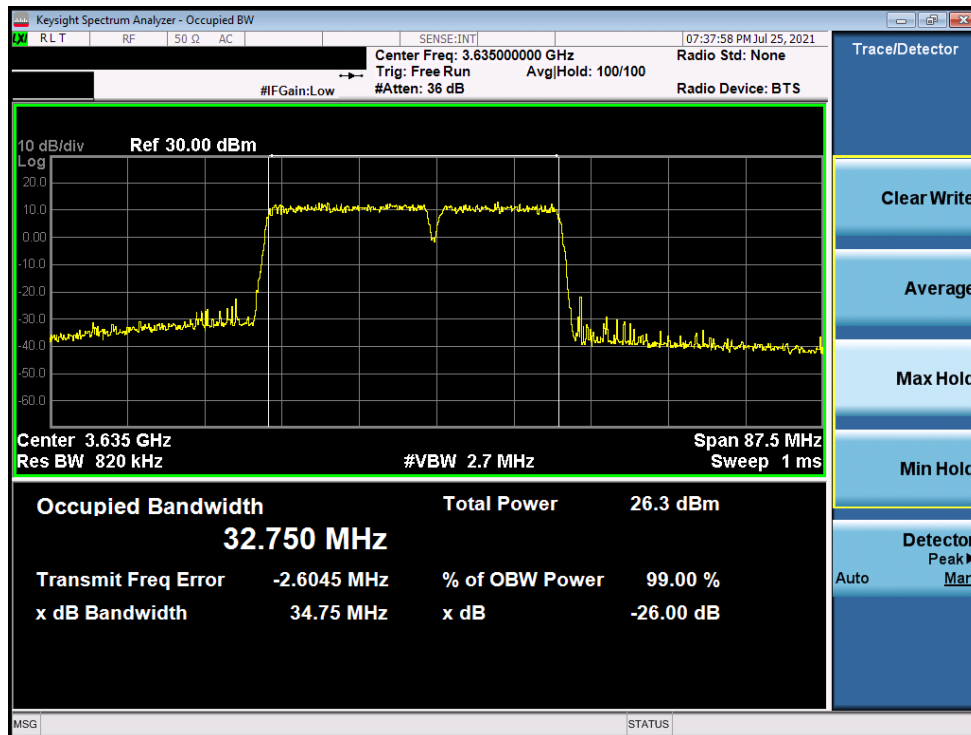


Plot 7-28. Occupied Bandwidth Plot (ULCA LTE Band 48 - 20+15MHz 256-QAM - Full RB Configuration)


FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 28 of 86




Plot 7-29. Occupied Bandwidth Plot (ULCA LTE Band 48 - 20+20MHz QPSK - Full RB Configuration)

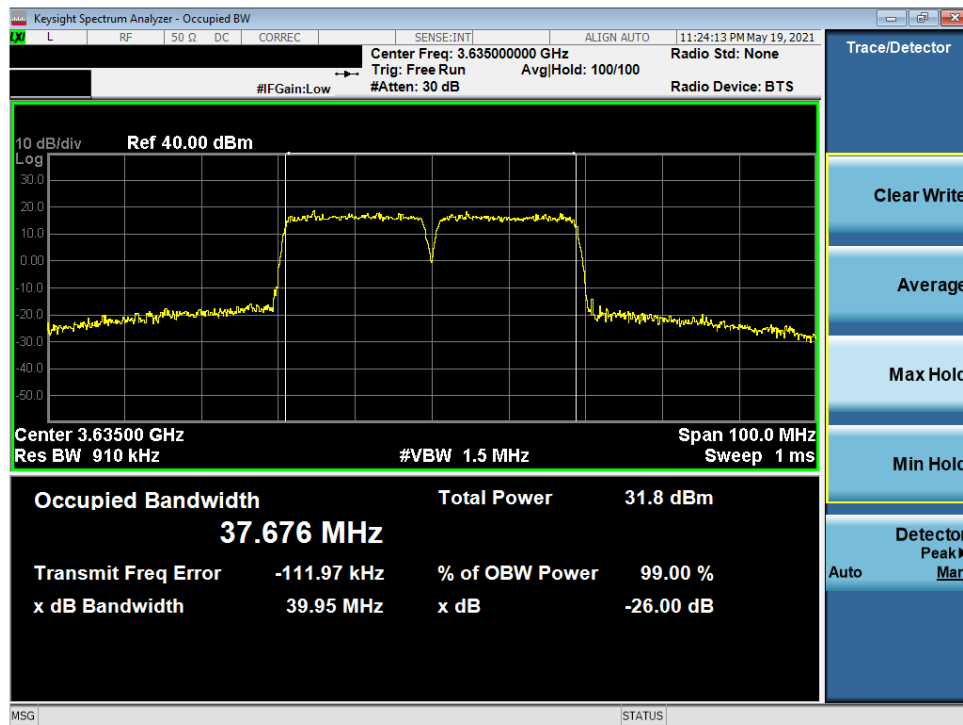


Plot 7-30. Occupied Bandwidth Plot (ULCA LTE Band 48 - 20+20MHz 16-QAM - Full RB Configuration)

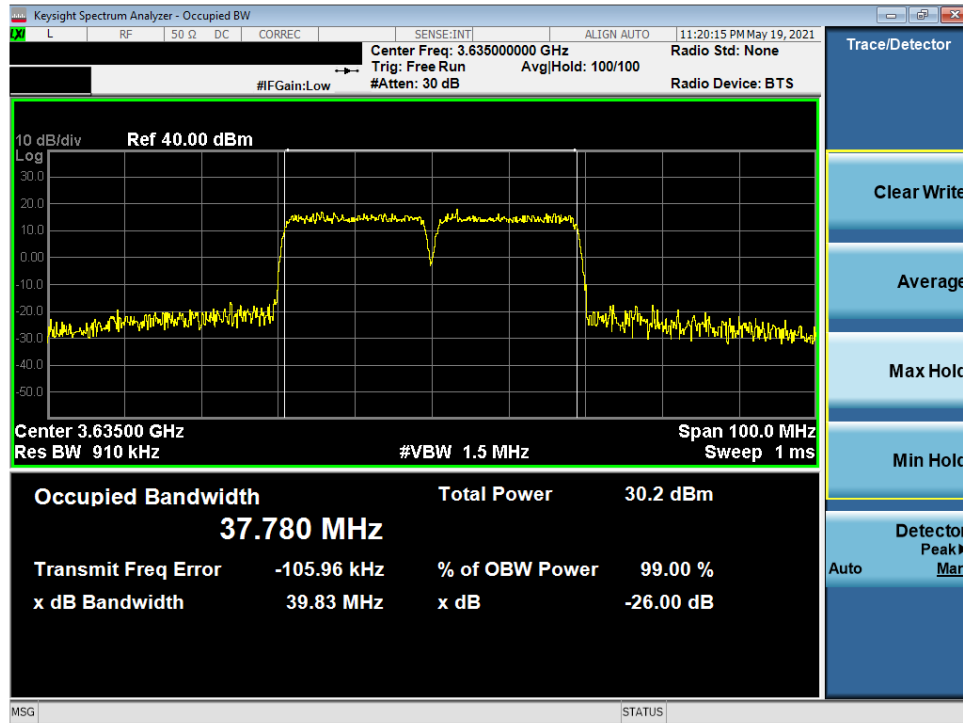

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 29 of 86

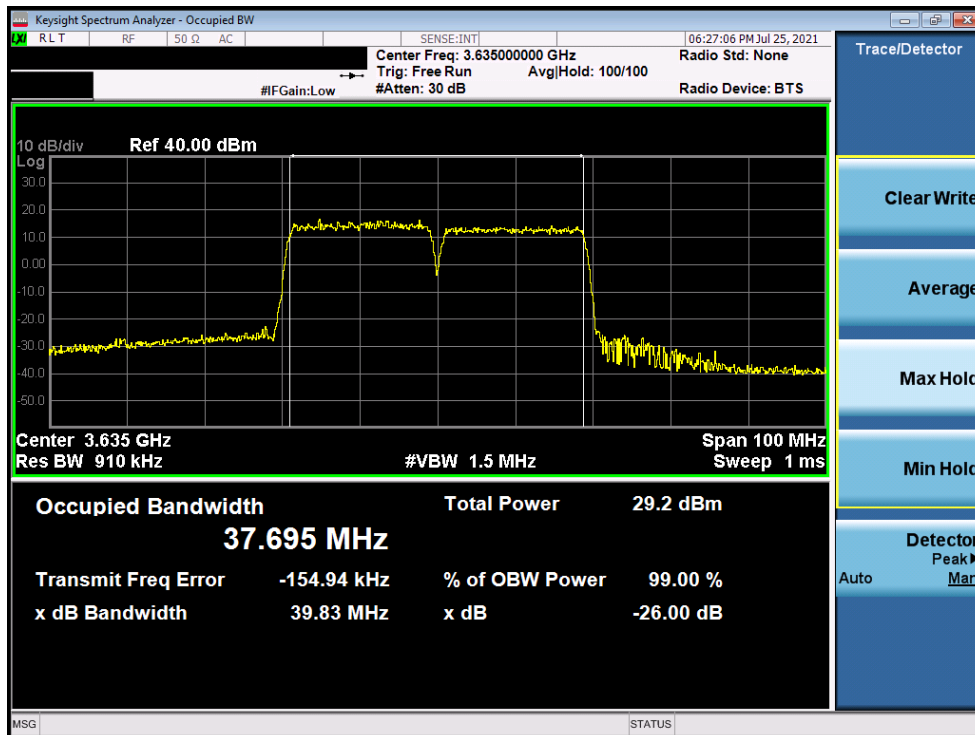

Plot 7-31. Occupied Bandwidth Plot (ULCA LTE Band 48 - 20+20MHz 64-QAM - Full RB Configuration)



Plot 7-32. Occupied Bandwidth Plot (ULCA LTE Band 48 - 20+20MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2568	 PCTEST Proud to be part of 	PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 30 of 86

7.3 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051 §96.41(e)

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section. All ports were tested and only the worst case data were reported.

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/Mhz.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to at least 10 * the fundamental frequency (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = Max Hold
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

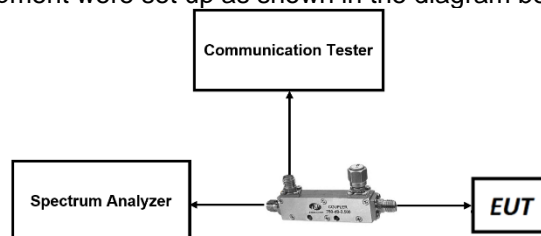




Figure 7-2. Test Instrument & Measurement Setup


FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 31 of 86

Test Notes


1. Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1 GHz and 1 MHz or greater for frequencies greater than 1 GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
2. Uplink carrier aggregation conducted spurious emissions measurements were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth. The worst case (highest) powers were found while operating with QPSK modulation with both carriers set to transmit using 1RB.
3. Uplink carrier aggregation inter-band emission was investigated and found to not be the worst case

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 32 of 86

LTE Band 48

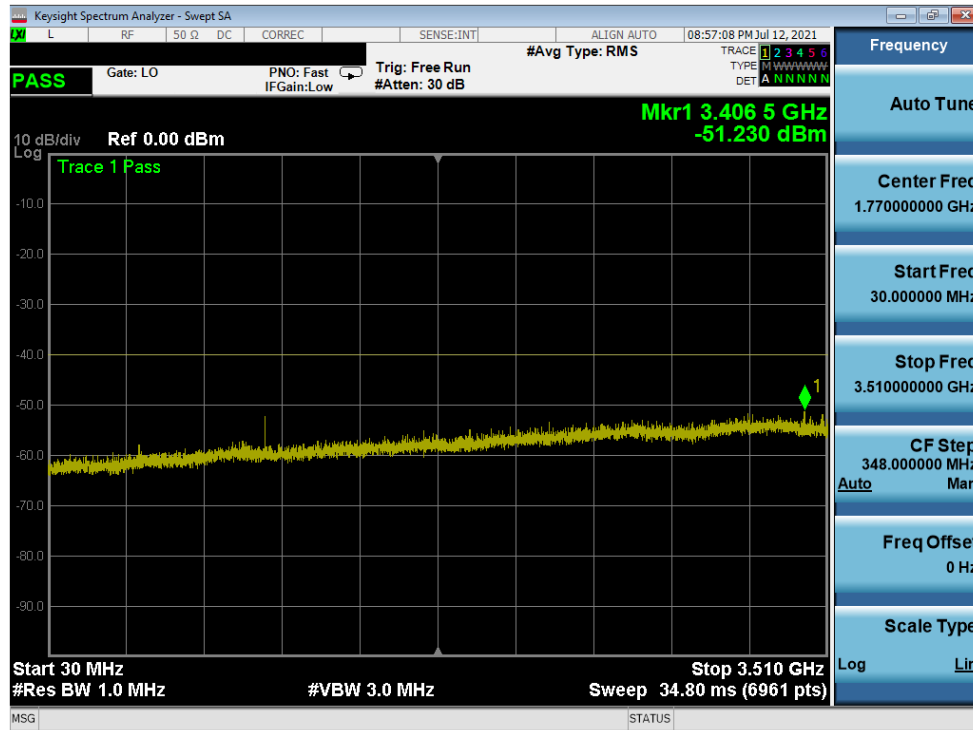


Plot 7-33. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - Low Channel)

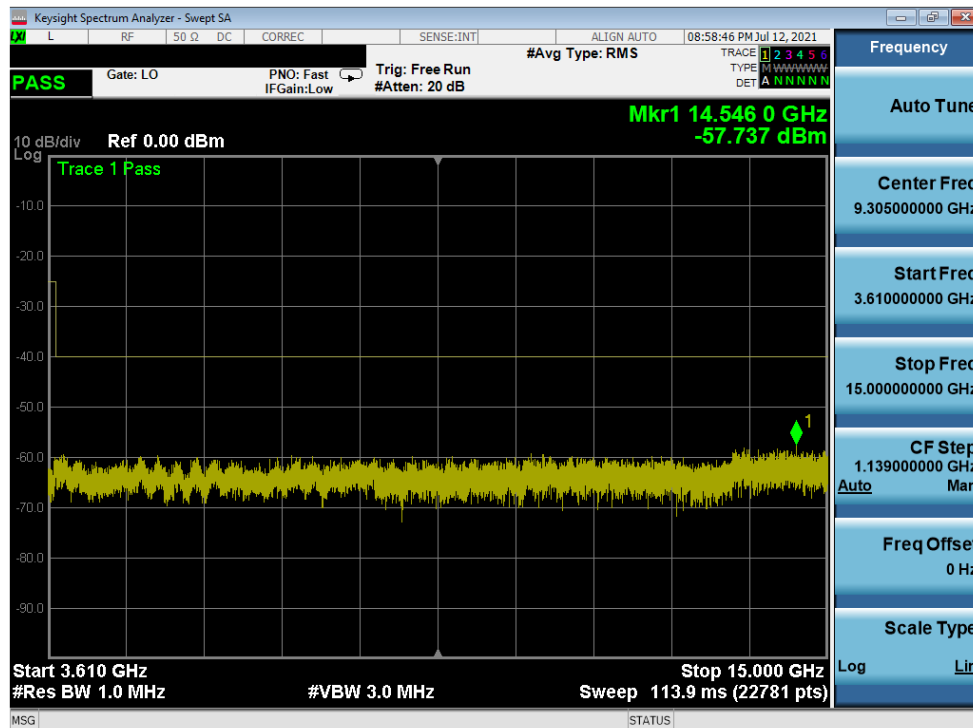


Plot 7-34. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - Low Channel)

FCC ID: BCGA2568	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 33 of 86

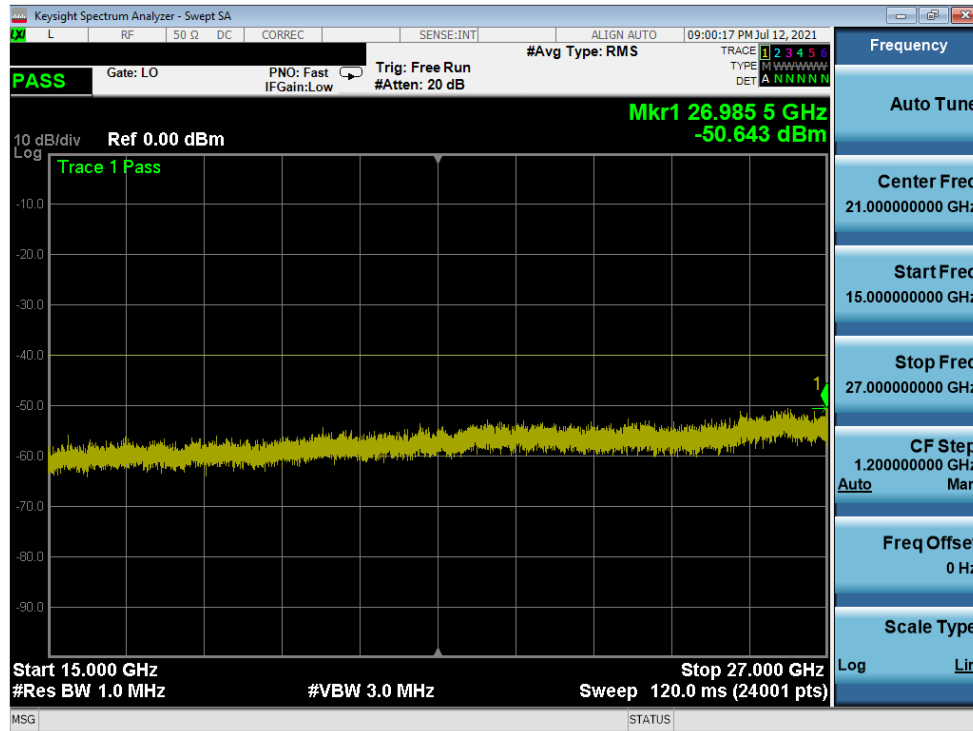


Plot 7-35. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - Low Channel)

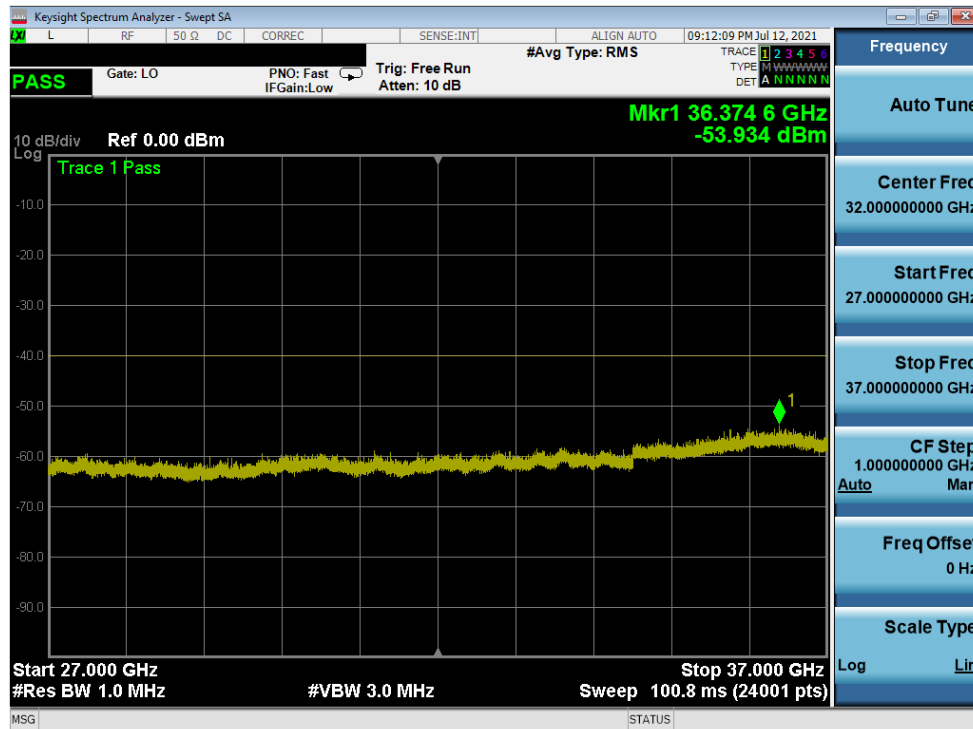


Plot 7-36. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - Low Channel)


FCC ID: BCGA2568	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 34 of 86

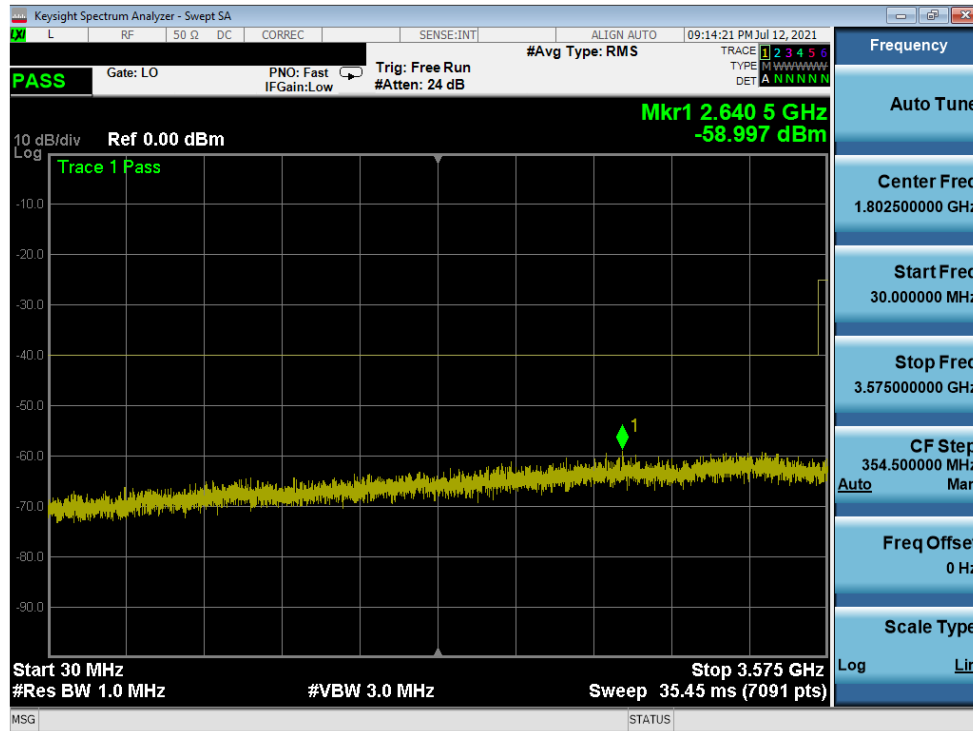


Plot 7-37. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - Mid Channel)

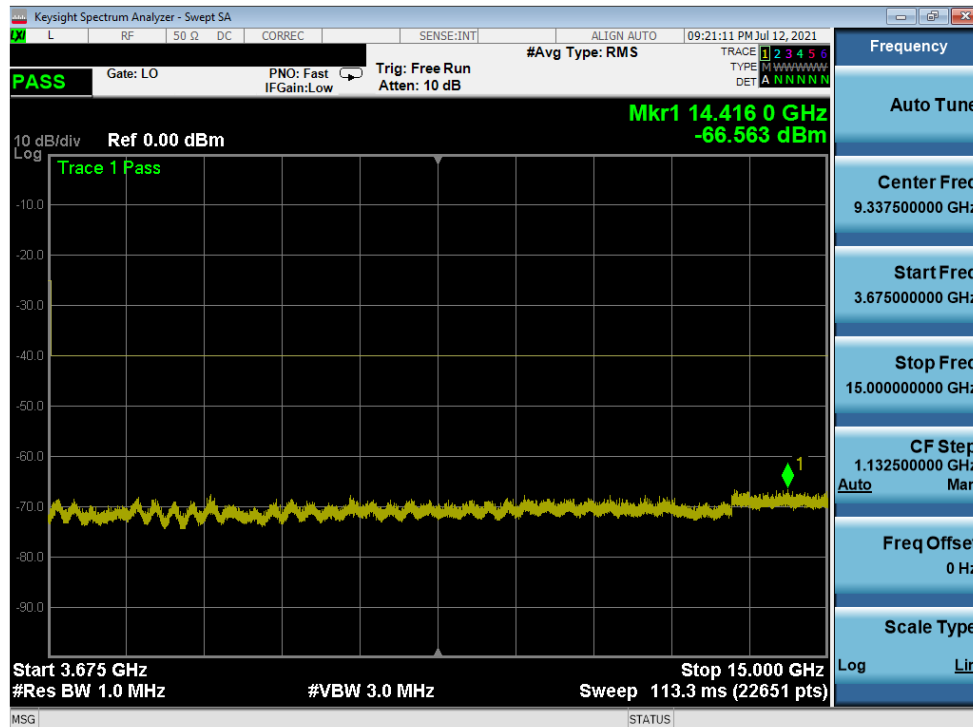


Plot 7-38. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - Mid Channel)

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 35 of 86

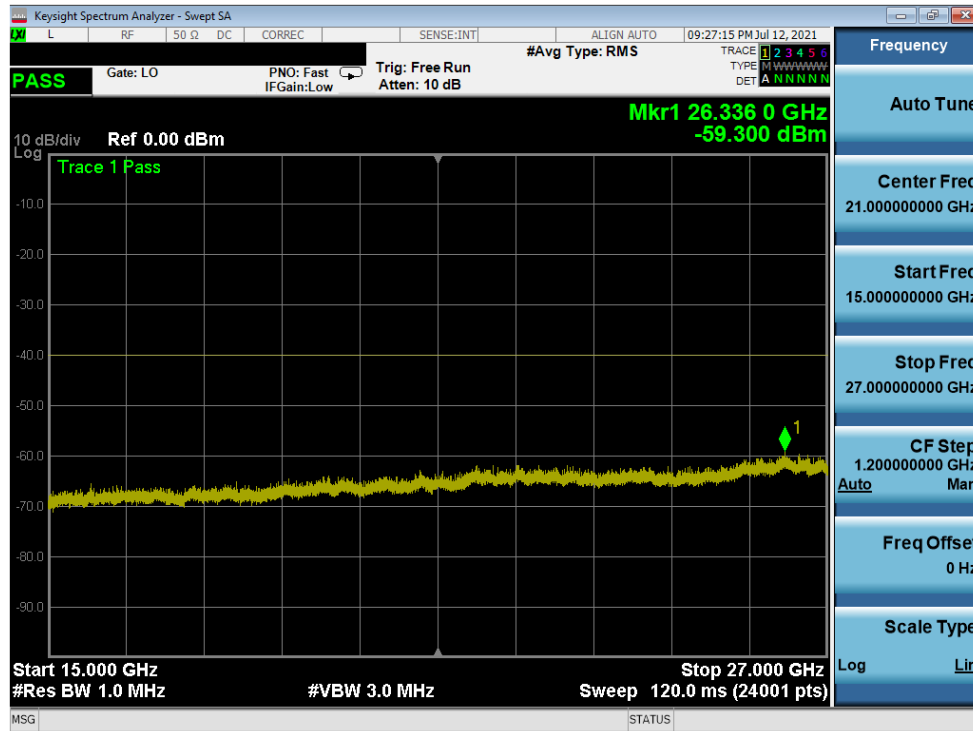


Plot 7-39. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - Mid Channel)

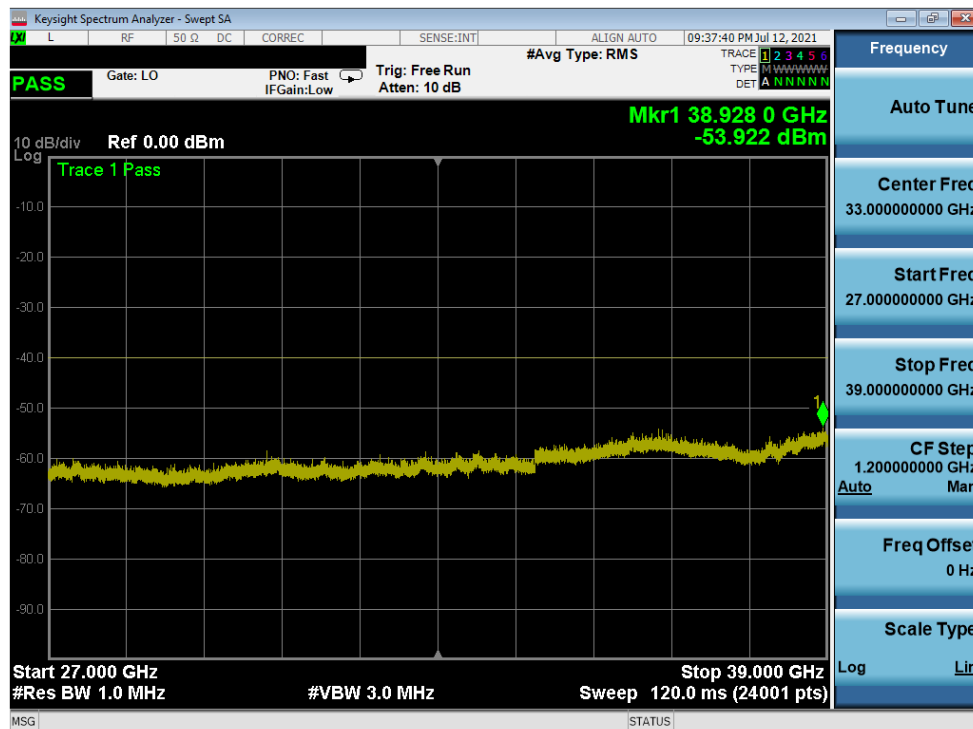


Plot 7-40. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - Mid Channel)


FCC ID: BCGA2568	PCTEST Proud to be part of element		PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device		Page 36 of 86

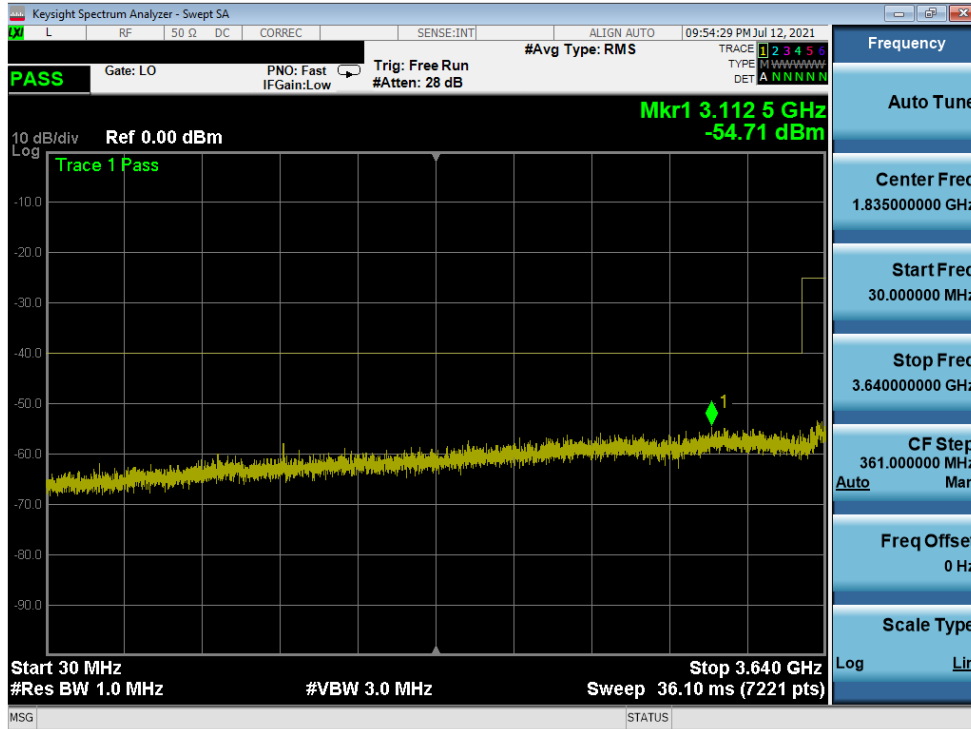


Plot 7-41. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - High Channel)

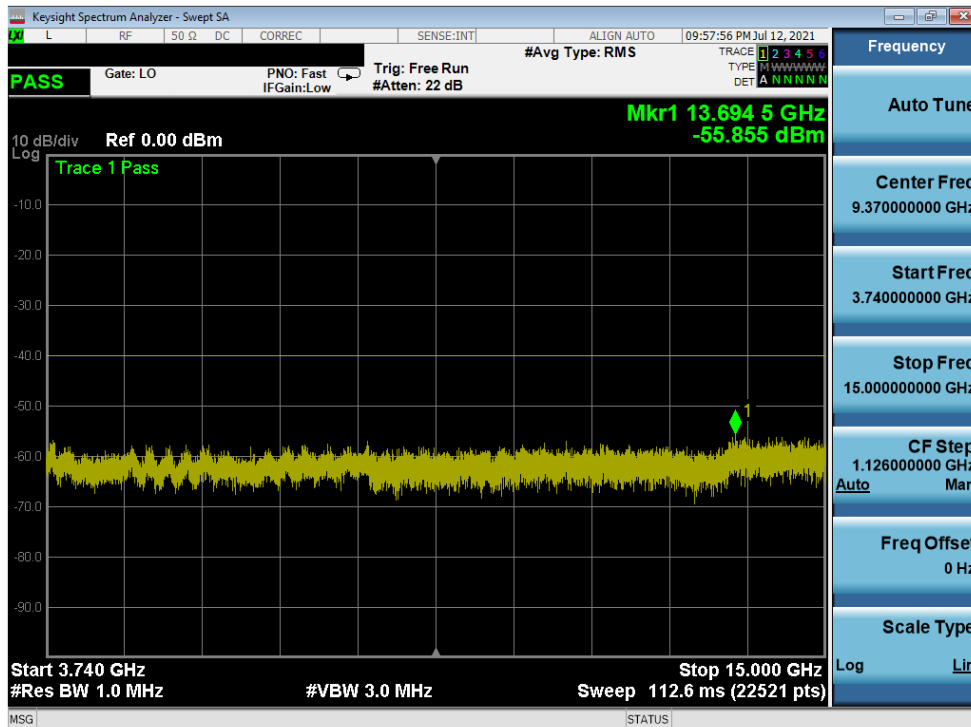


Plot 7-42. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - High Channel)


FCC ID: BCGA2568	PCTEST Proud to be part of 	PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 37 of 86

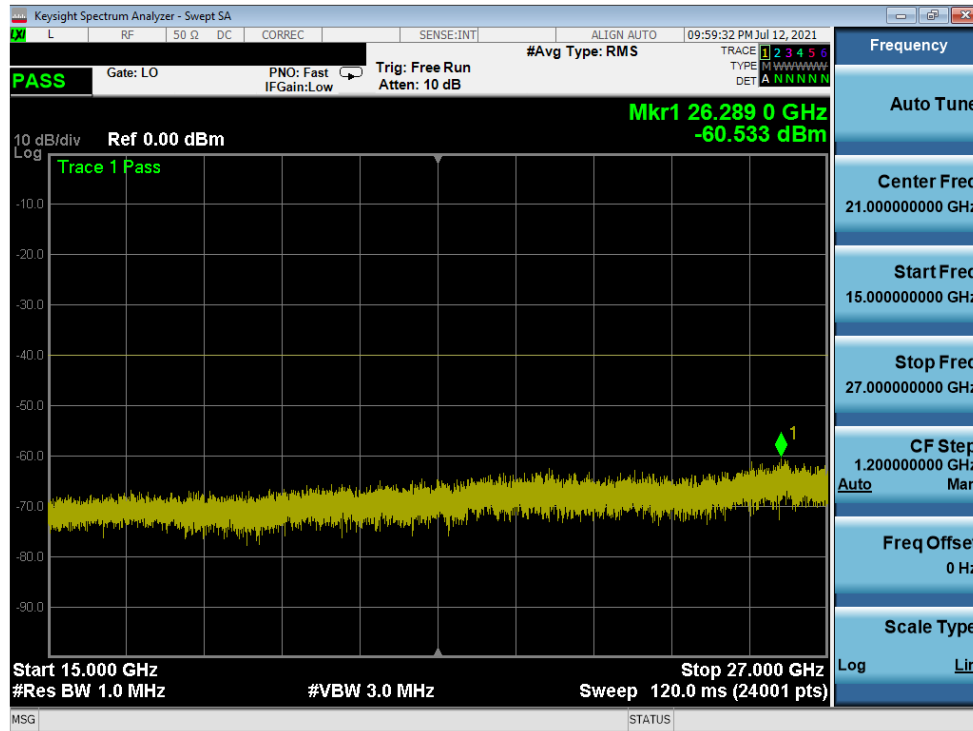


Plot 7-43. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - High Channel)

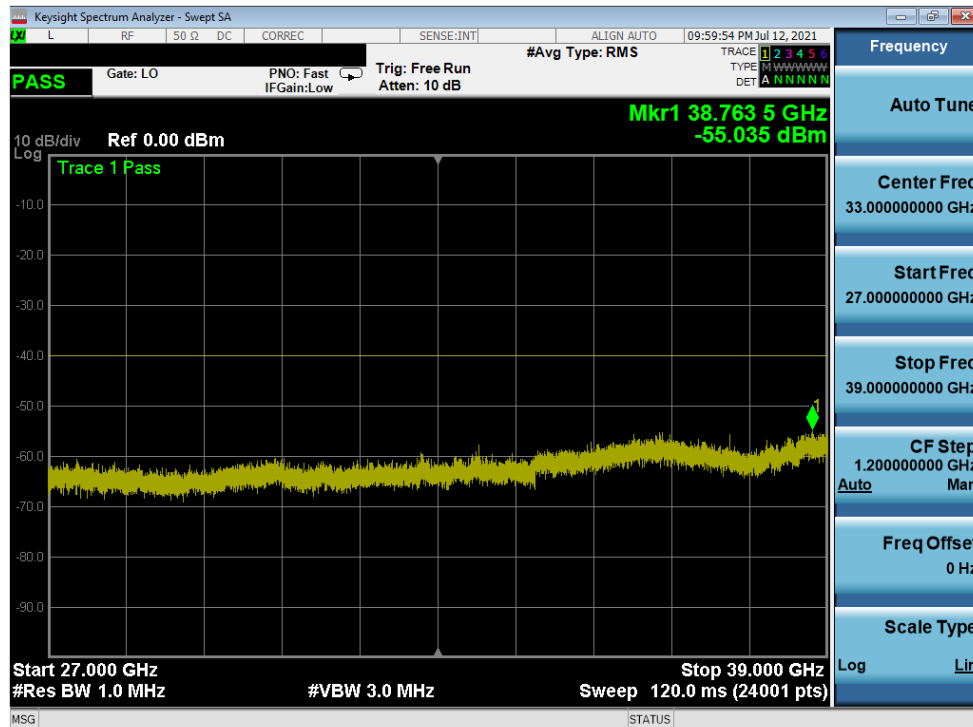


Plot 7-44. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - High Channel)

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 38 of 86


ULCA LTE Band 48

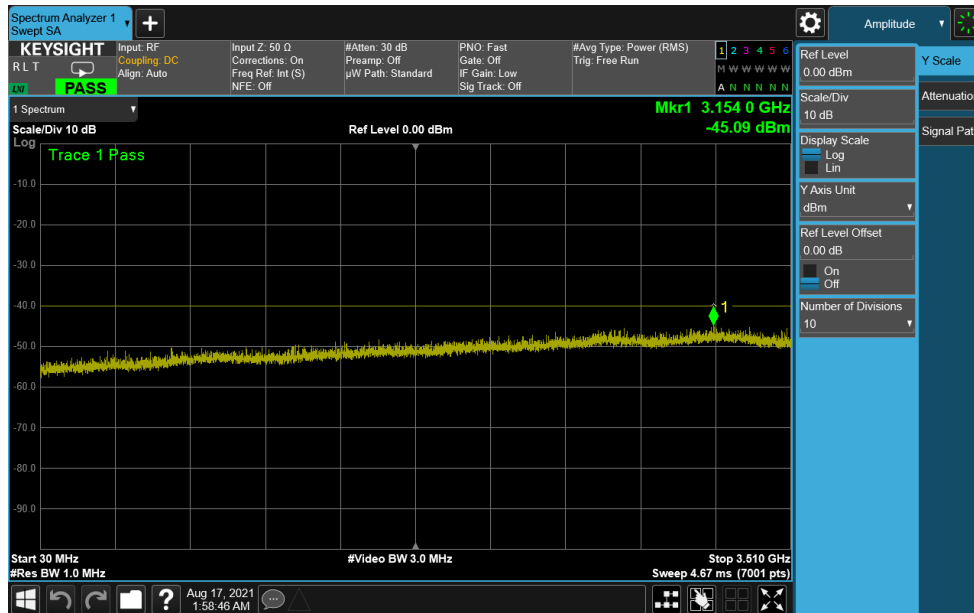


Plot 7-45. Conducted Spurious Plot (ULCA LTE Band 48 - 20+20MHz QPSK - Low Channel)

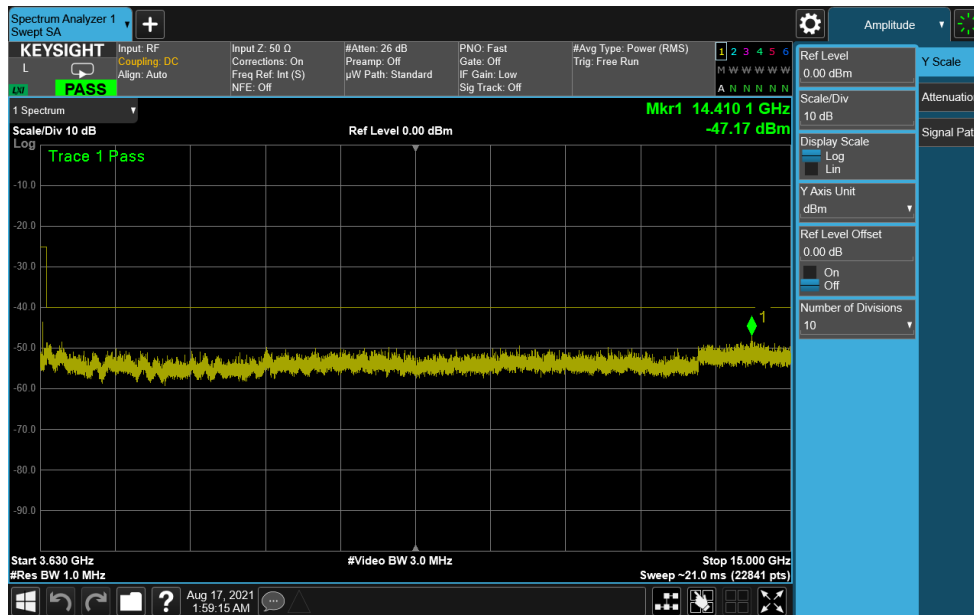


Plot 7-46. Conducted Spurious Plot (ULCA LTE Band 48 - 20+20MHz QPSK - Low Channel)

FCC ID: BCGA2568	PCTEST Proud to be part of 	PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 39 of 86

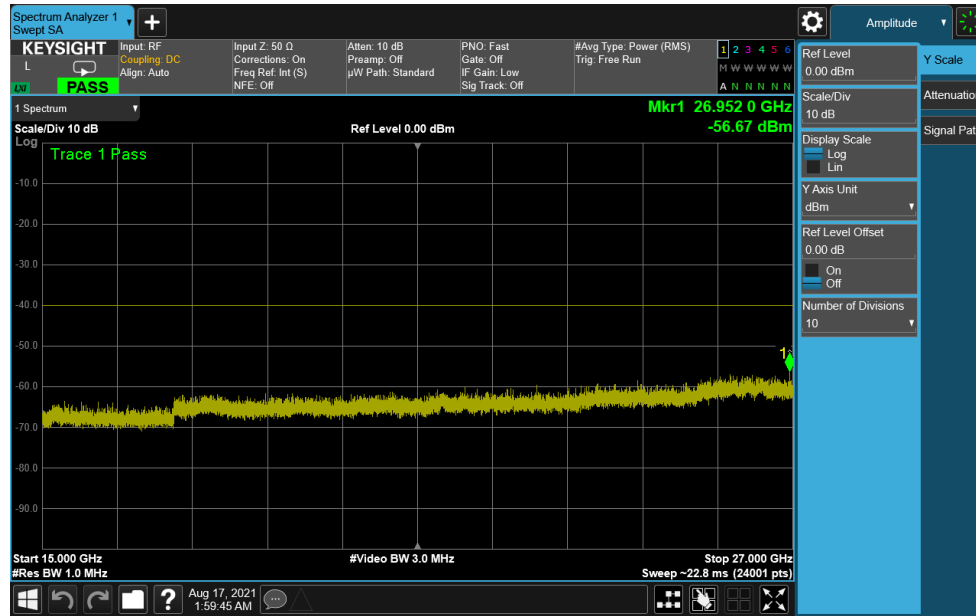


Plot 7-47. Conducted Spurious Plot (ULCA LTE Band 48 - 20+20MHz QPSK - Low Channel)

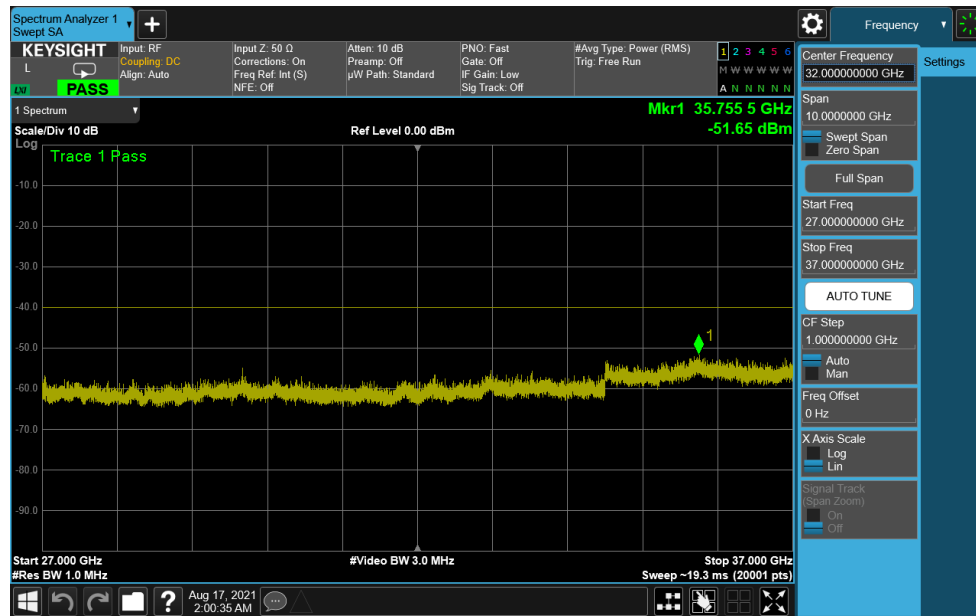


Plot 7-48. Conducted Spurious Plot (ULCA LTE Band 48 - 20+20MHz QPSK - Low Channel)

FCC ID: BCGA2568	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device		Page 40 of 86

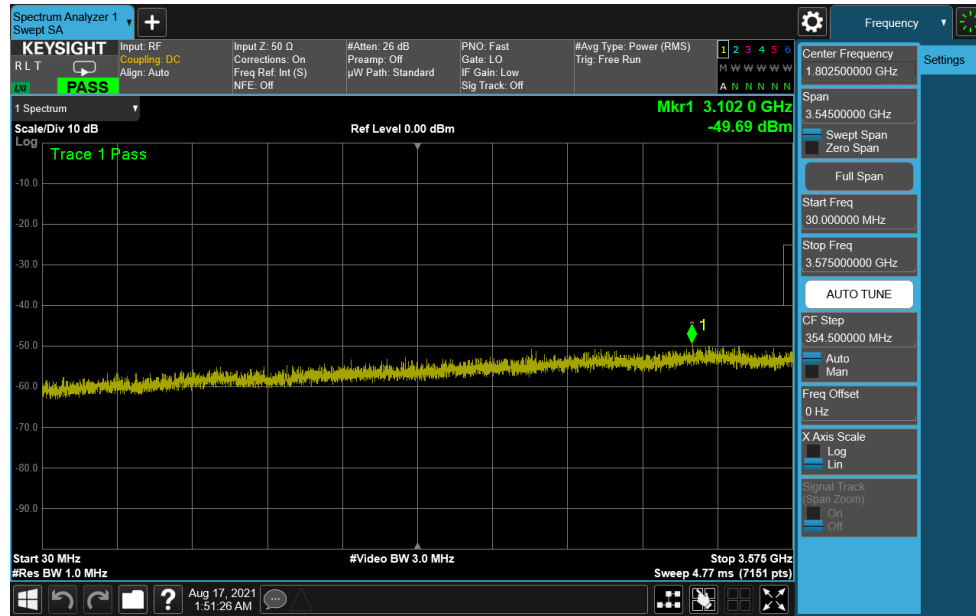


Plot 7-49. Conducted Spurious Plot (ULCA LTE Band 48 - 20+20MHz QPSK - Mid Channel)

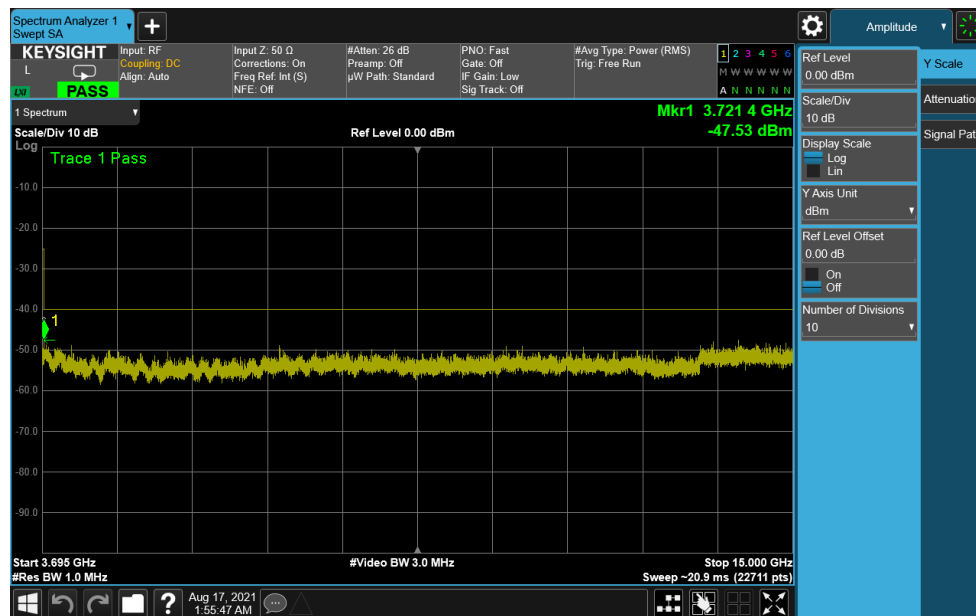


Plot 7-50. Conducted Spurious Plot (ULCA LTE Band 48 - 20+20MHz QPSK - Mid Channel)

FCC ID: BCGA2568	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device		Page 41 of 86

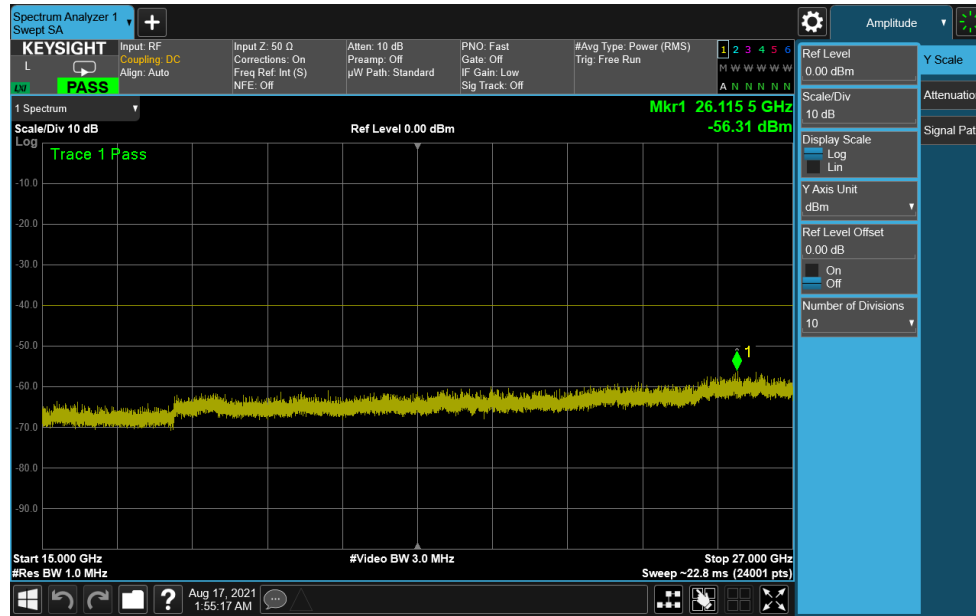


Plot 7-51. Conducted Spurious Plot (ULCA LTE Band 48 - 20+20MHz QPSK - Mid Channel)

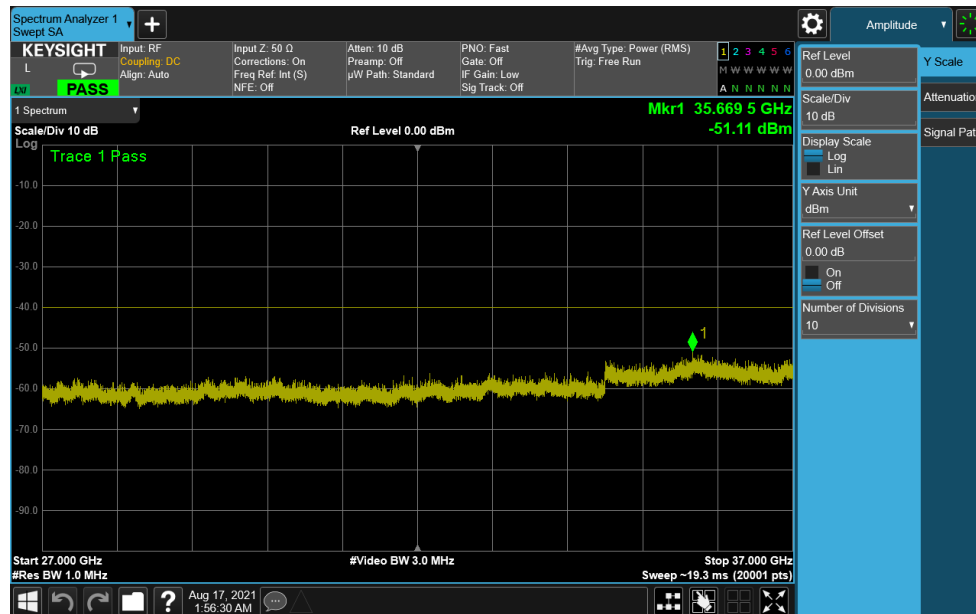


Plot 7-52. Conducted Spurious Plot (ULCA LTE Band 48 - 20+20MHz QPSK - Mid Channel)

FCC ID: BCGA2568	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 42 of 86

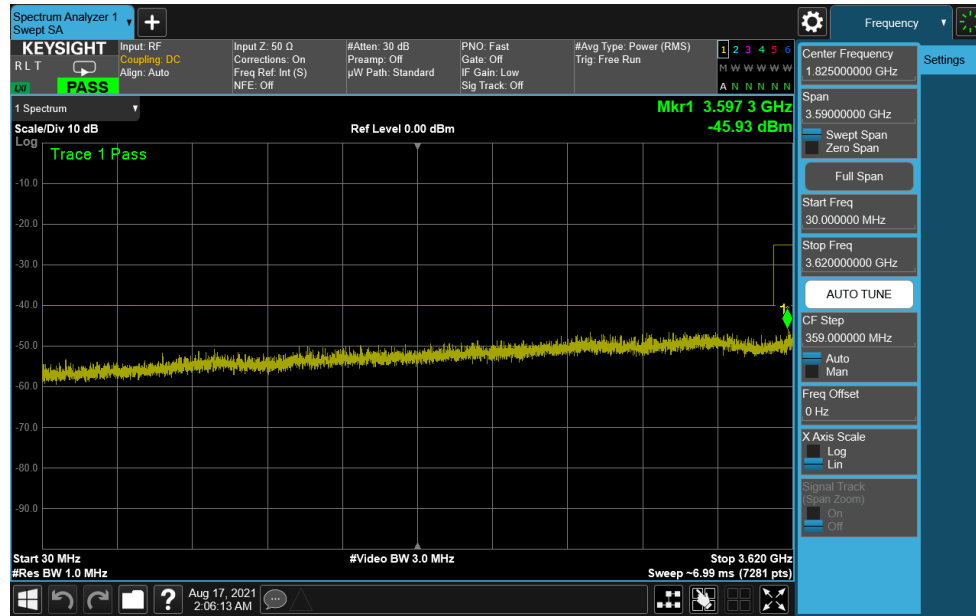


Plot 7-53. Conducted Spurious Plot (ULCA LTE Band 48 - 20+20MHz QPSK - High Channel)

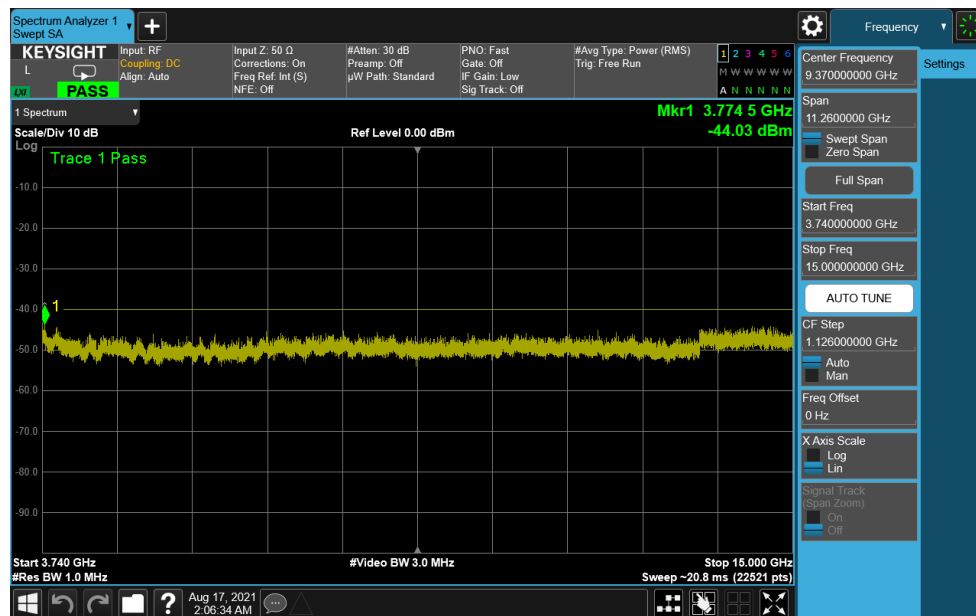


Plot 7-54. Conducted Spurious Plot (ULCA LTE Band 48 - 20+20MHz QPSK - High Channel)

FCC ID: BCGA2568	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 43 of 86

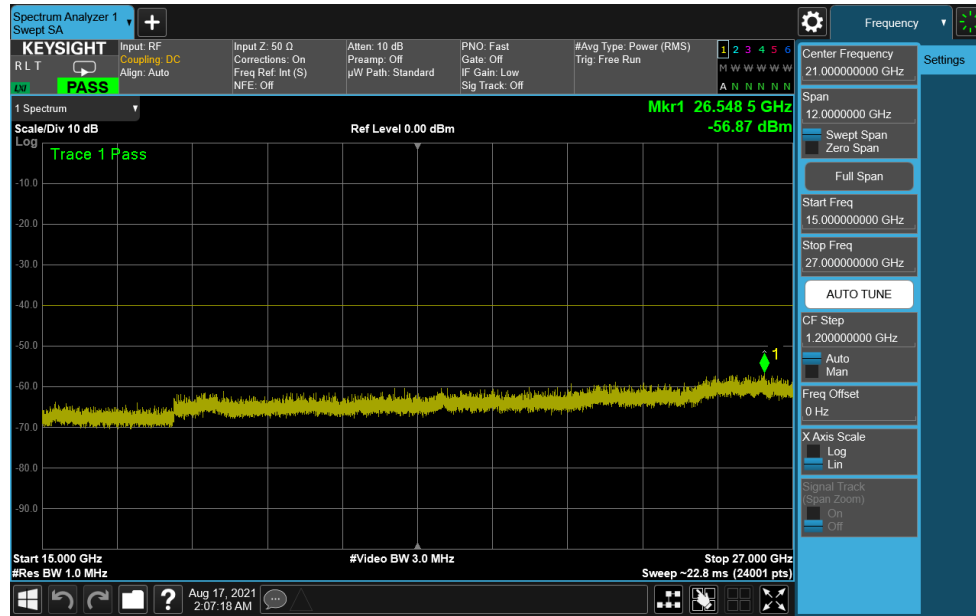

Plot 7-55. Conducted Spurious Plot (ULCA LTE Band 48 - 20+20MHz QPSK - High Channel)

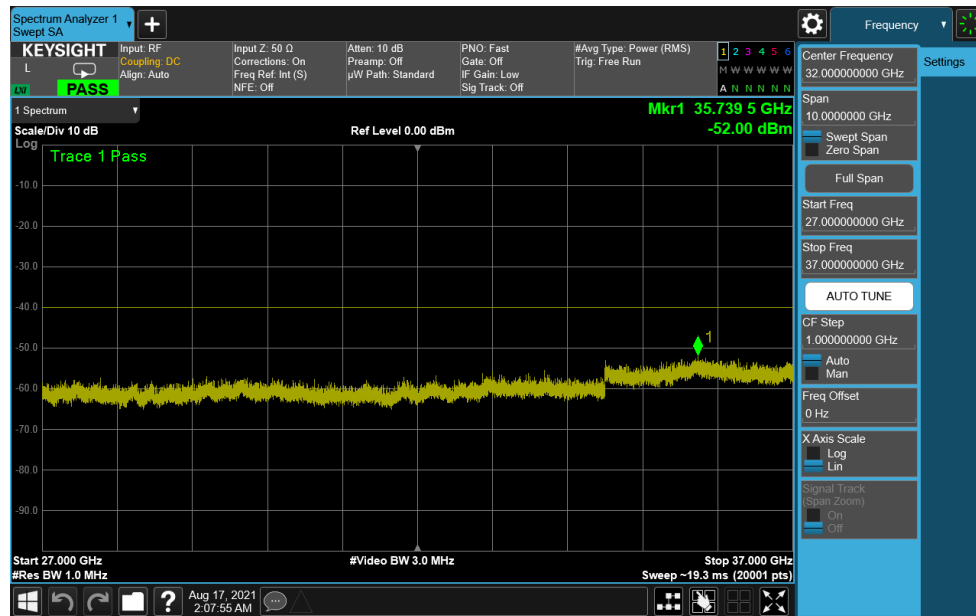

Plot 7-56. Conducted Spurious Plot (ULCA LTE Band 48 - 20+20MHz QPSK - High Channel)

FCC ID: BCGA2568	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 44 of 86

7.4 Band Edge Emissions at Antenna Terminal

§2.1051 §96.41(e)(ii)

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation and all ports were investigated and the worst case configuration results are reported in this section.

The conducted power of any emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B MHz (where B is the bandwidth in MHz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B MHz below the lower CBSD-assigned channel edge. At all frequencies greater than B MHz above the upper CBSD assigned channel edge and less than B MHz below the lower CBSD-assigned channel edge, the conducted power of any end user device emission shall not exceed -25 dBm/MHz. The conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW \geq 1% of the emission bandwidth
4. VBW \geq 3 x RBW
5. Detector = RMS
6. Number of sweep points \geq 2 x Span/RBW
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.





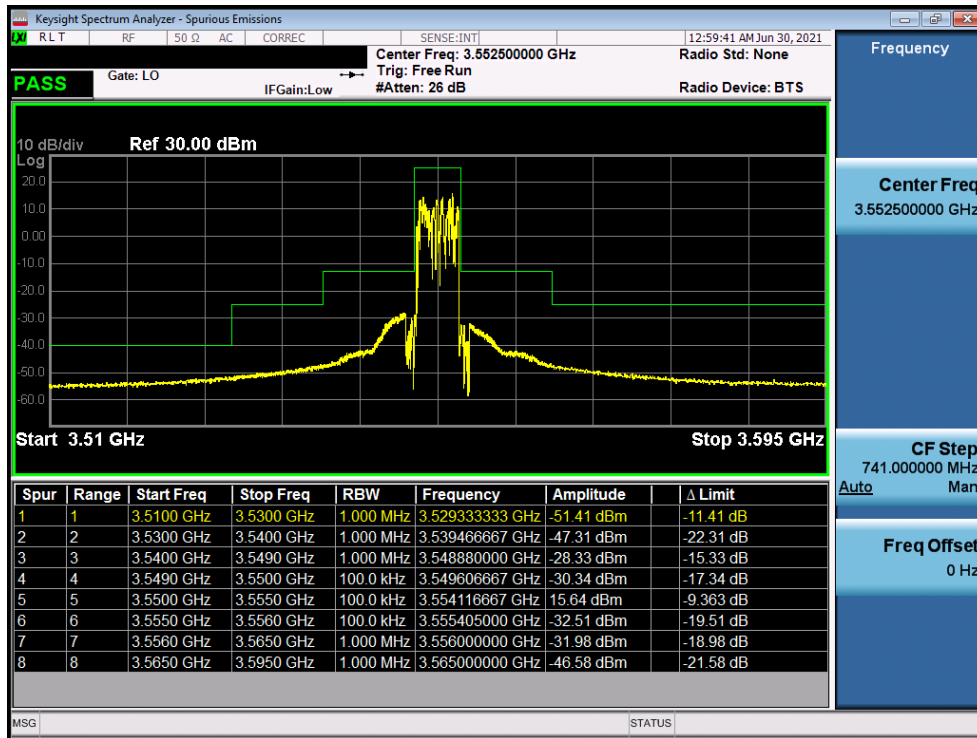
Figure 7-3. Test Instrument & Measurement Setup

Test Notes


None

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 45 of 86

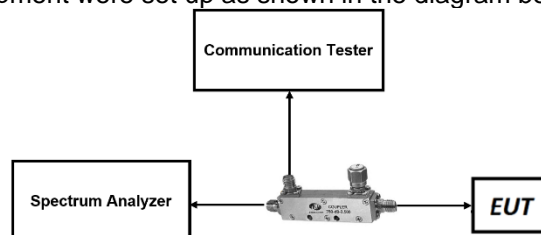LTE Band 48




Plot 7-57. ACP Plot (LTE Band 48 - 5MHz QPSK - Low Channel)

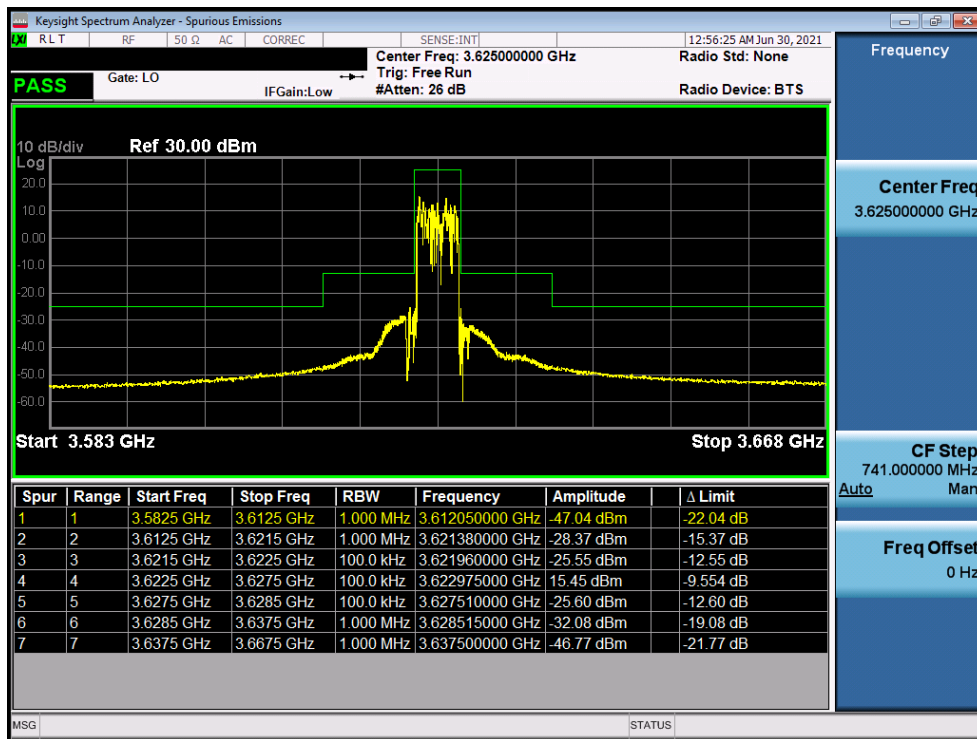


Plot 7-58. ACP Plot (LTE Band 48 - 5MHz QPSK - Mid Channel)

FCC ID: BCGA2568	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 46 of 86

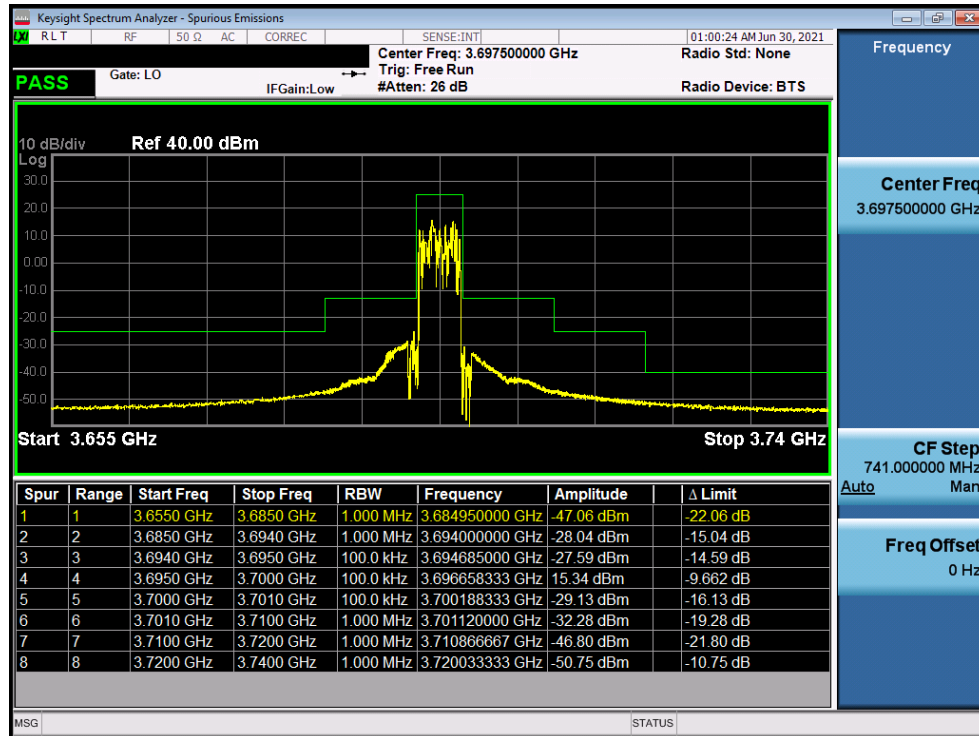


Plot 7-59. ACP Plot (LTE Band 48 - 5MHz QPSK - High Channel)

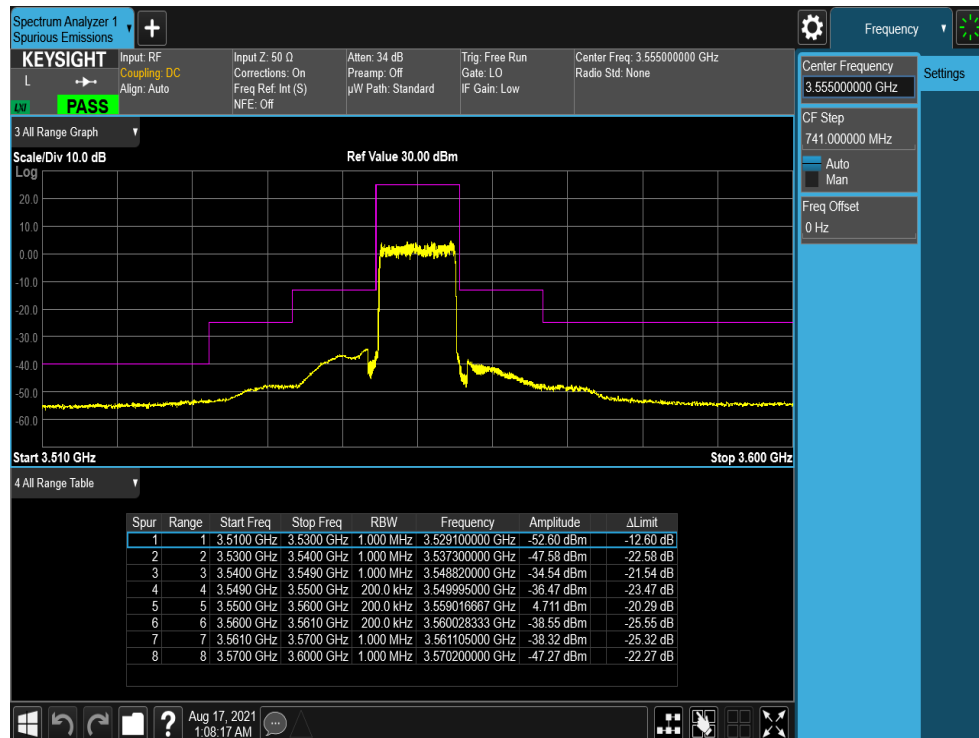


Plot 7-60. ACP Plot (LTE Band 48 - 10MHz QPSK - Low Channel)

FCC ID: BCGA2568	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 47 of 86

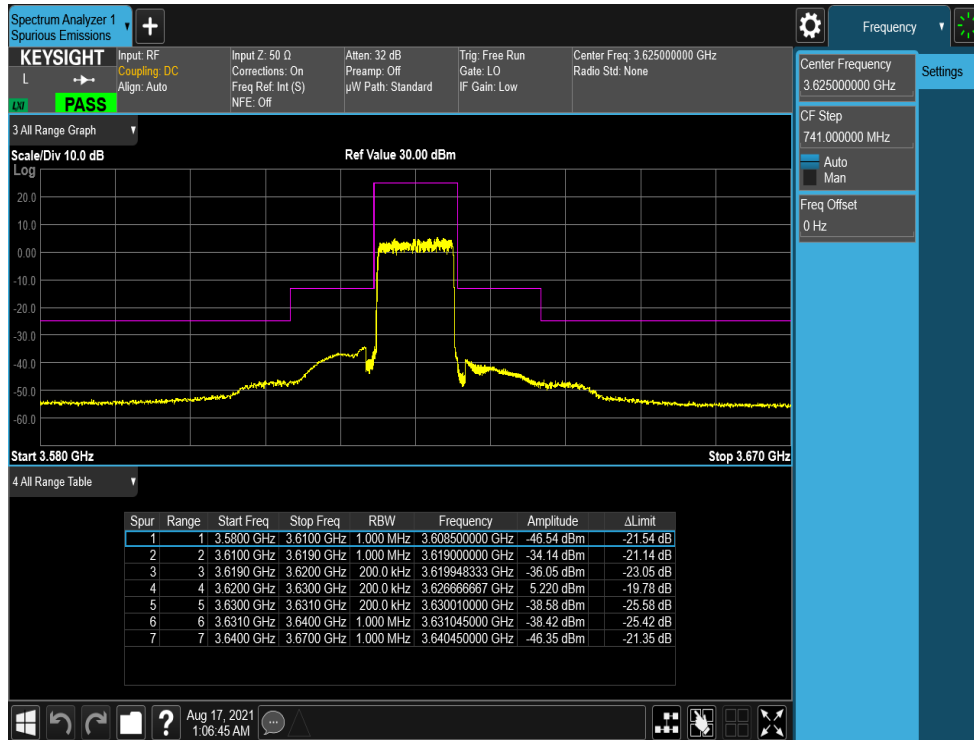


Plot 7-61. ACP Plot (LTE Band 48 - 10MHz QPSK - Mid Channel)

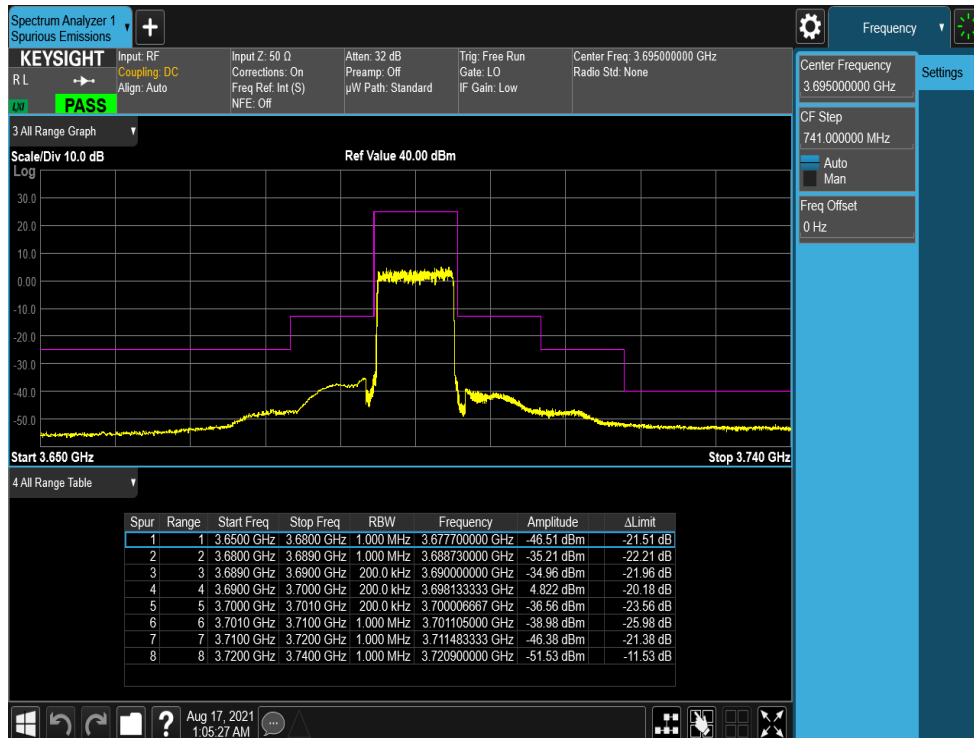


Plot 7-62. ACP Plot (LTE Band 48 - 10MHz QPSK - High Channel)

FCC ID: BCGA2568	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 48 of 86

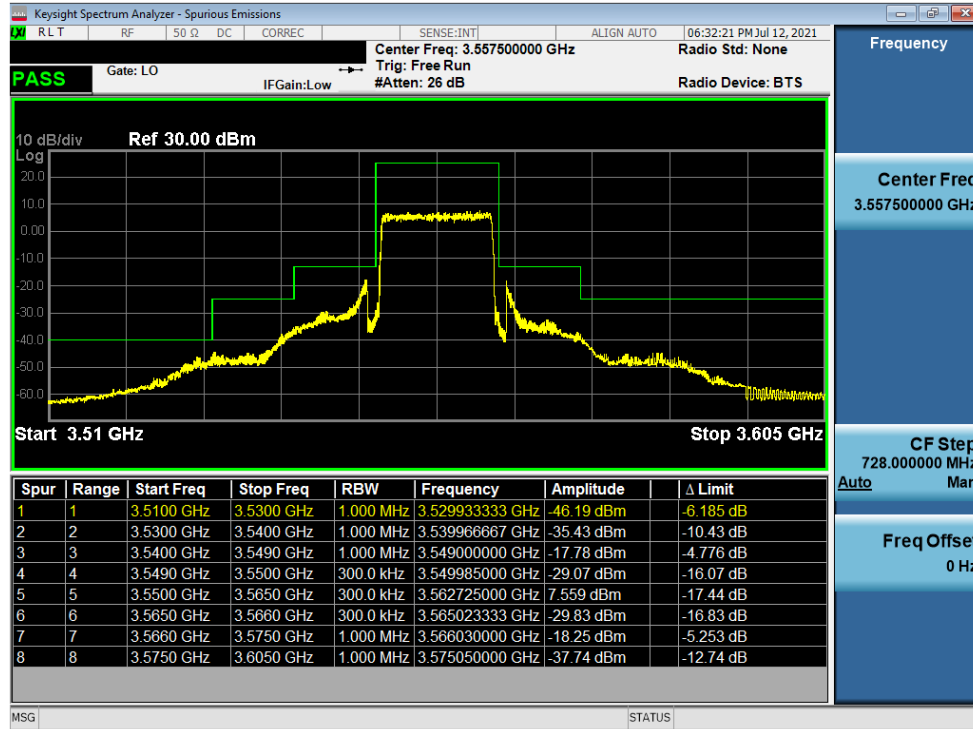


Plot 7-63. ACP Plot (LTE Band 48 - 15MHz QPSK - Low Channel)

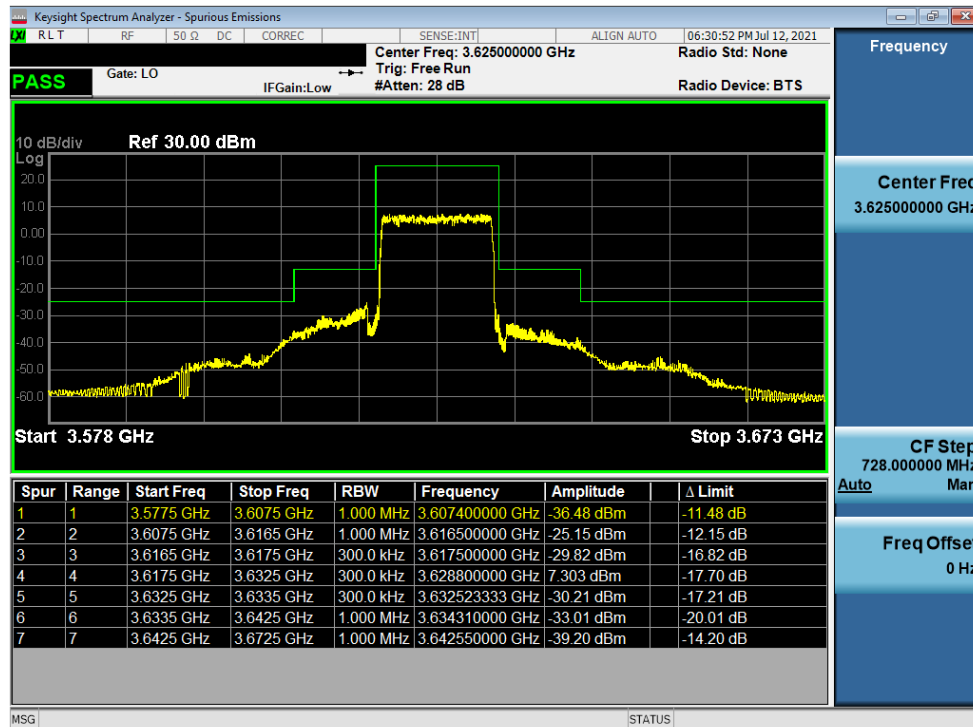


Plot 7-64. ACP Plot (LTE Band 48 - 15MHz QPSK - Mid Channel)

FCC ID: BCGA2568	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 49 of 86

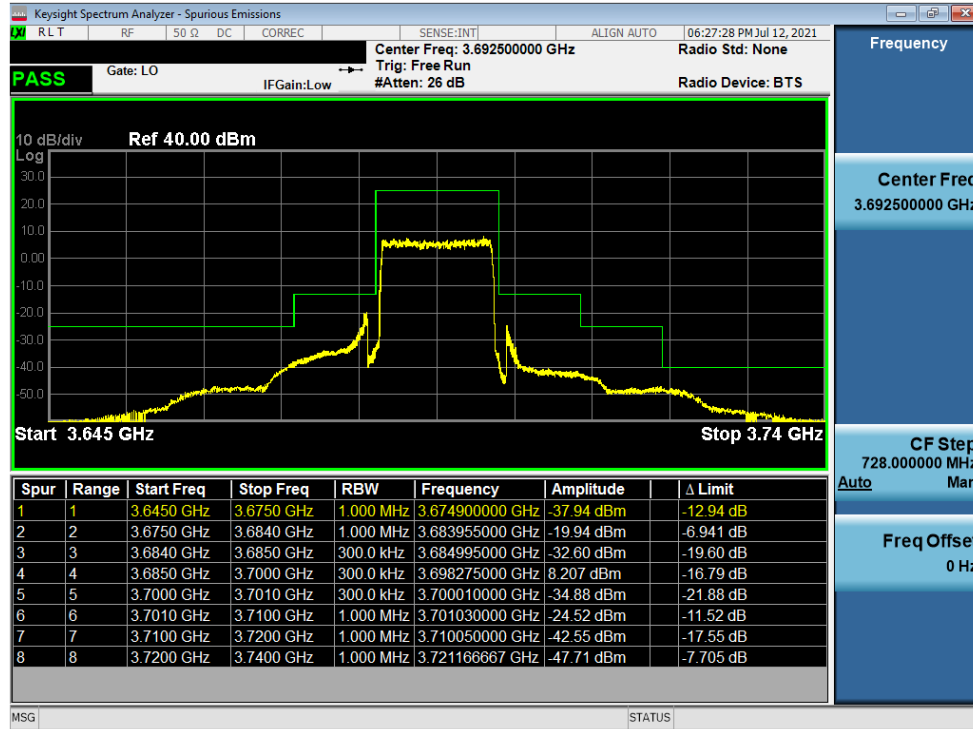


Plot 7-65. ACP Plot (LTE Band 48 - 15MHz QPSK - High Channel)

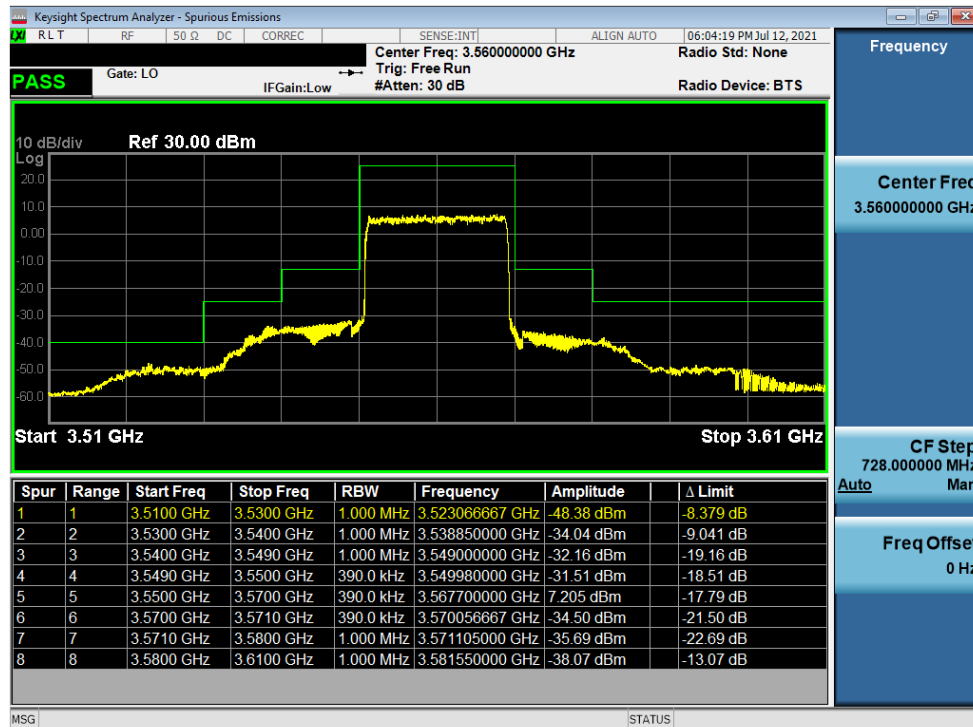


Plot 7-66. ACP Plot (LTE Band 48 - 20MHz QPSK - Low Channel)

FCC ID: BCGA2568	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 50 of 86

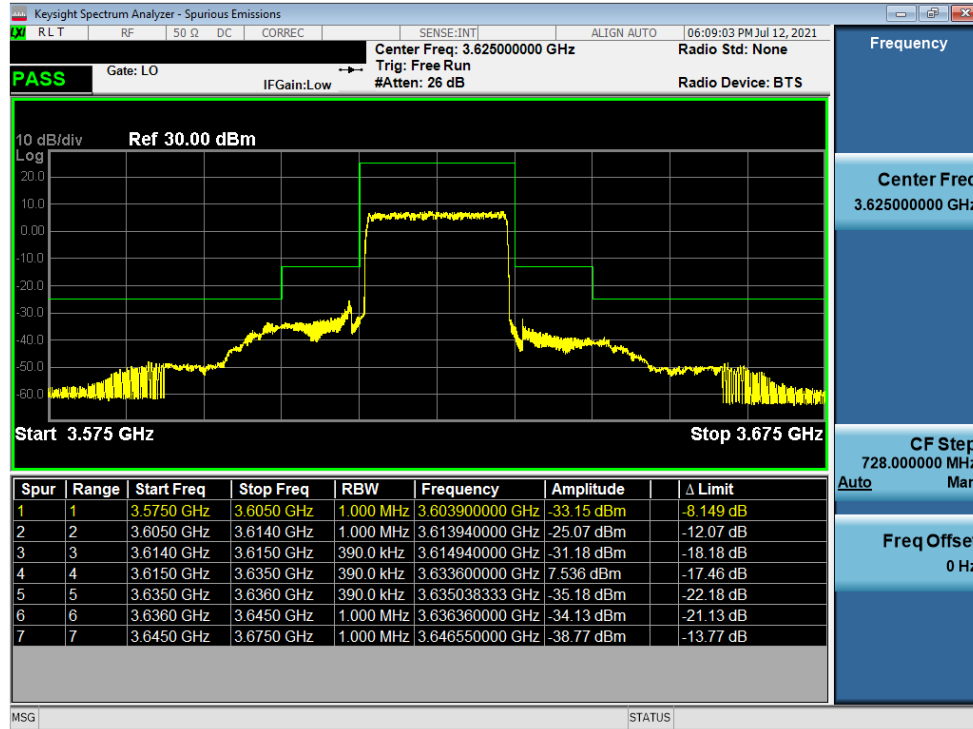


Plot 7-67. ACP Plot (LTE Band 48 - 20MHz QPSK - Mid Channel)

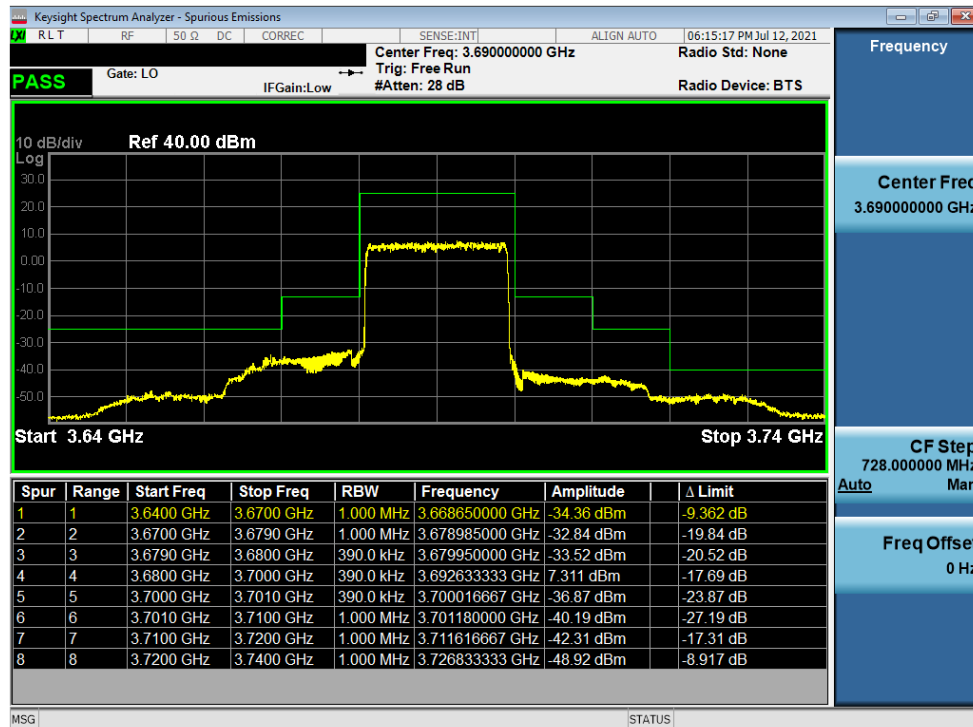


Plot 7-68. ACP Plot (LTE Band 48 - 20MHz QPSK - High Channel)

FCC ID: BCGA2568	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 51 of 86

ULCA LTE Band 48

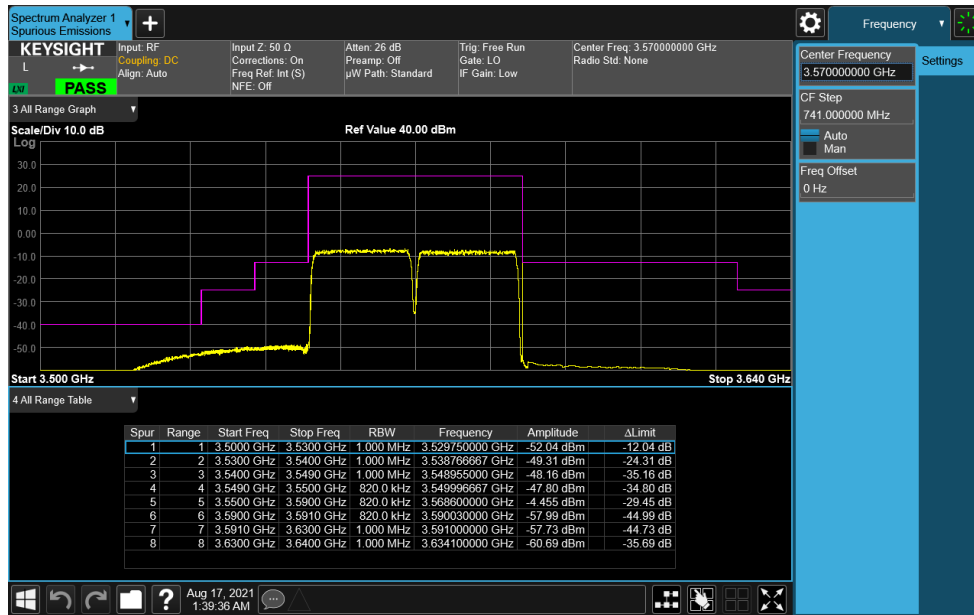


Plot 7-69. ACP Plot (LTE Band 48 – 20+20MHz QPSK - Low Channel)

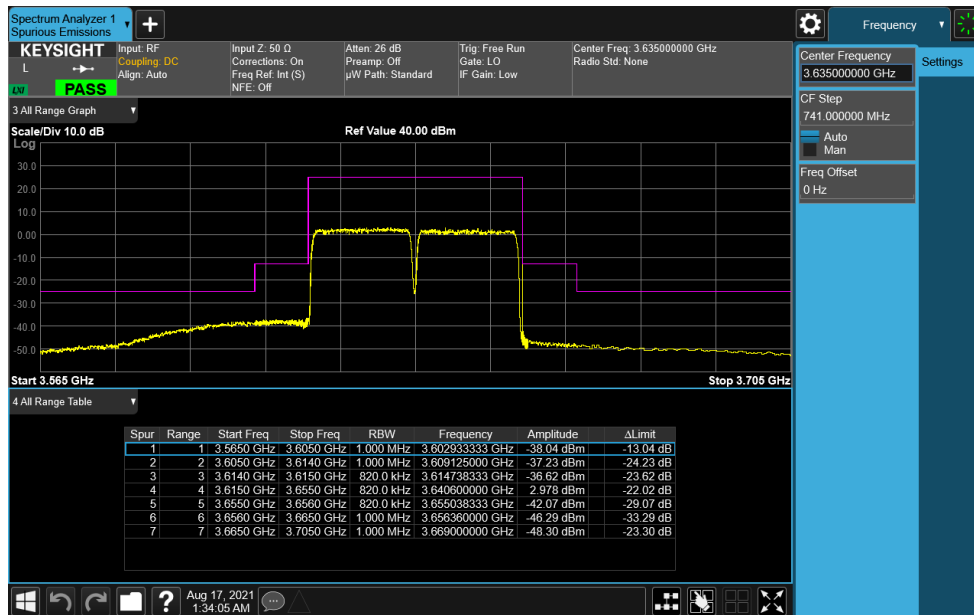

Plot 7-70. ACP Plot (LTE Band 48 – 20+20MHz QPSK - Mid Channel)

FCC ID: BCGA2568	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 52 of 86

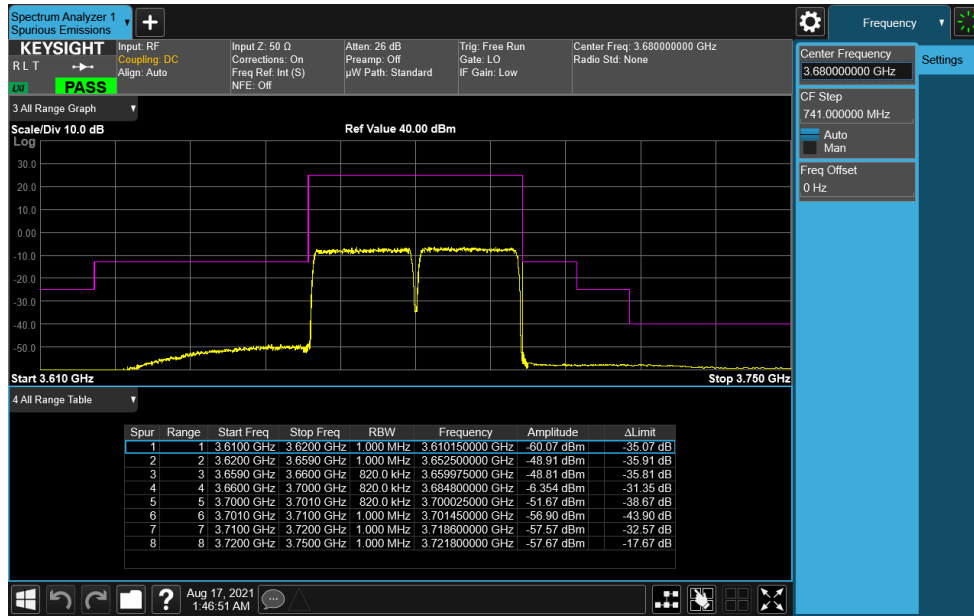

Plot 7-71. ACP Plot (LTE Band 48 – 20+20MHz QPSK - High Channel)

FCC ID: BCGA2568	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device		Page 53 of 86

7.5 Additional Maximum Power Reduction (A-MPR) §2.1046

Test Overview

A-MPR is implemented in this device per the A-MPR specification in 3GPP TS 36.101. The conducted powers are shown herein to cover the different A-MPR levels specified in the standard. Conducted power measurements are performed to measure the average output power of the EUT. The averaging is to be performed only over duration of active transmissions at maximum output power level. The average measurements do not include averaging over periods when the transmitter is quiescent or when operating at reduced power level. All ports were tested and only the worst case data were reported.

Test Procedure Used

KDB 971168 D01 v03

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below





Figure 7-4. Conducted Power Measurement Setup


Test Notes

1. A-MPR was only applied for test purposes to the 2CC case since the 1CC case was compliant for all testing at max power.
2. A-MPR was verified to comply with the "CA_NS_10" specification in the 3GPP TS 36.101 standard by setting the MCC to a U.S. code and the MNC to a U.S. carrier supporting LTE B48 operation.

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 54 of 86

Test Case	NS	MCC	MNC	Channel BW [MHz]	PCC			SCC			A-MPR [dB]	Modulation	MPR [dB]	Maximum Target Output Power [dBm]	A-MPR Measured Power [dBm]
					Channel Frequency [MHz]	RB Size	RB Offset	Channel Frequency [MHz]	RB Size	RB Offset					
1	NS_01	310	910	20 + 20	3560	100	0	3579.8	100	0	≤ 11	QPSK	0	20.30	19.32
												16-QAM	1	19.30	18.35
												64-QAM	2	18.30	17.41
												256-QAM	4	16.30	15.41
2				20 + 20	3560	1	99	3579.8	1	0	≤ 11	QPSK	0	20.30	20.21
												16-QAM	1	19.30	19.86
												64-QAM	2	18.30	18.91
												256-QAM	4	16.30	15.81
3				20 + 20	3605.1	100	0	3624.9	100	0	≤ 4.5	QPSK	0	20.30	19.33
												16-QAM	1	19.30	18.36
												64-QAM	2	18.30	17.45
												256-QAM	4	16.30	15.28
4				20 + 20	3605.1	1	99	3624.9	1	0	≤ 4.5	QPSK	0	20.30	20.30
												16-QAM	1	19.30	19.97
												64-QAM	2	18.30	18.80
												256-QAM	4	16.30	15.77
5				20 + 20	3670.1	100	0	3689.9	100	0	≤ 11	QPSK	0	20.30	19.31
												16-QAM	1	19.30	18.36
												64-QAM	2	18.30	17.34
												256-QAM	4	16.30	15.38
6				20 + 20	3670.1	1	99	3689.9	1	0	≤ 11	QPSK	0	20.30	20.25
												16-QAM	1	19.30	19.79
												64-QAM	2	18.30	18.67
												256-QAM	4	16.30	15.62

Table 7-2. A-MPR LTE ULCA Band 48 Conducted Power Measurement

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
Page 55 of 86		

7.6 Radiated Power (EIRP)

§96.41(b)

Test Overview

Equivalent Isotropic Radiated Power (EIRP) measurements are calculated by adding highest antenna gain to maximum measured conducted output power. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI C63.26-2015

Test Settings

The relevant equation for determining the EIRP from the conducted RF output power measured is:

$$\text{EIRP} = \text{PMeas} - \text{LC} + \text{GT}$$

Where:

EIRP = Equivalent Isotropic Radiated Power (expressed in the same units as PMeas, typically dBW or dBm)

PMeas = measured transmitter output power or PSD, in dBW or dBm

LC = signal attenuation in the connecting cable between the transmitter and antenna in dB

GT = gain of the transmitting antenna, in dBi (EIRP)

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.








Figure 7-5. EIRP Measurement Setup

FCC ID: BCGA2568	 PCTEST Proud to be part of 	PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 56 of 86

Test Notes

- 1) The worst case emissions are reported with the modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) The Level (dBm) readings in the table were taken with a correction table loaded into the base station simulator. The correction table was used to account for the signal attenuation in the connecting cable between the transmitter and antenna.
- 4) The worst case EIRP shown in this section is found with LTE operating only using 1RB. As such, the EIRP/10MHz and full channel EIRP values will be identical since 1RB is fully contained within all available channel bandwidths for LTE Band 48 (i.e. 5, 10, 15, 20MHz).
- 5) Uplink carrier aggregation for LTE B48 is only supported in this EUT while operating in Power Class 3.
- 6) For ULCA, conducted power measurements were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth. Channel bandwidth data is shown in the tables below based only on the channel bandwidths that were supported in this device.


FCC ID: BCGA2568	 PCTEST Proud to be part of 	PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 57 of 86

7.6.1 Antenna 3a – EIRP

LTE Band 48

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
5 MHz	QPSK	3552.5	2.60	1 / 24	19.32	21.92	0.156	23.00	-1.08
		3625.0	2.60	1 / 12	19.19	21.79	0.151	23.00	-1.21
		3697.5	2.60	1 / 12	19.40	22.00	0.158	23.00	-1.00
	16-QAM	3697.5	2.60	1 / 24	18.07	20.67	0.117	23.00	-2.33
	64-QAM	3552.5	2.60	1 / 0	16.91	19.51	0.089	23.00	-3.49
	256-QAM	3552.5	2.60	1 / 24	14.14	16.74	0.047	23.00	-6.26
10 MHz	QPSK	3555.0	2.60	1 / 25	19.40	22.00	0.158	23.00	-1.00
		3625.0	2.60	1 / 25	19.14	21.74	0.149	23.00	-1.26
		3695.0	2.60	1 / 49	19.32	21.92	0.156	23.00	-1.08
	16-QAM	3695.0	2.60	1 / 49	18.53	21.13	0.130	23.00	-1.87
	64-QAM	3555.0	2.60	1 / 25	16.52	19.12	0.082	23.00	-3.88
	256-QAM	3555.0	2.60	1 / 25	13.99	16.59	0.046	23.00	-6.41
15 MHz	QPSK	3557.5	2.60	1 / 37	19.28	21.88	0.154	23.00	-1.12
		3625.0	2.60	1 / 74	19.22	21.82	0.152	23.00	-1.18
		3692.5	2.60	1 / 74	19.40	22.00	0.158	23.00	-1.00
	16-QAM	3692.5	2.60	1 / 74	18.58	21.18	0.131	23.00	-1.82
	64-QAM	3625.0	2.60	1 / 37	16.39	18.99	0.079	23.00	-4.01
	256-QAM	3557.5	2.60	1 / 74	14.19	16.79	0.048	23.00	-6.21
20 MHz	QPSK	3560.0	2.60	1 / 50	19.38	21.98	0.158	23.00	-1.02
		3625.0	2.60	1 / 50	19.40	22.00	0.158	23.00	-1.00
		3690.0	2.60	1 / 50	19.40	22.00	0.158	23.00	-1.00
	16-QAM	3625.0	2.60	1 / 50	18.70	21.30	0.135	23.00	-1.70
	64-QAM	3560.0	2.60	1 / 50	16.66	19.26	0.084	23.00	-3.74
	256-QAM	3560.0	2.60	1 / 50	14.16	16.76	0.047	23.00	-6.24


Table 7-3. EIRP Data (LTE Band 48)

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
Page 58 of 86		

ULCA LTE Band 48

Power State	Band	Bandwidth (PCC + SCC)	PCC					SCC					ULCA Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]		
			Modulation	UL Channel	Frequency [MHz]	UL # RB	UL RB Offset	Modulation	UL Channel	Frequency [MHz]	UL # RB	UL RB Offset								
Max	LTE B48	20MHz + 5MHz	QPSK	55340	3560.0	1	99	QPSK	55457	3571.7	1	0	19.19	2.60	21.91	0.155	23.00	-1.09		
				55990	3625.0	1	99		56107	3636.7	1	0	19.19	2.60	21.79	0.151	23.00	-1.21		
				56640	3690.0	1	0		56757	3701.7	1	99	19.16	2.60	21.76	0.150	23.00	-1.24		
			QPSK	55340	3560	100	0	QPSK	55457	3571.7	100	0	17.28	2.60	19.88	0.097	23.00	-3.12		
				16-QAM	55340	3560	100		0	16-QAM	55457	3571.7	100	0	16.3	2.60	18.90	0.078	23.00	-4.10
				64-QAM	55340	3560	100		0	64-QAM	55457	3571.7	100	0	16.18	2.60	18.78	0.076	23.00	-4.22
			256-QAM	55340	3560	100	0	256-QAM	55457	3571.7	100	0	14.26	2.60	16.86	0.049	23.00	-6.14		
				55340	3560.0	1	99		55484	3574.4	1	0	19.26	2.60	21.86	0.153	23.00	-1.14		
Max	LTE B48	20MHz + 10MHz	QPSK	55990	3625.0	1	99	QPSK	56134	3639.4	1	0	19.07	2.60	21.67	0.147	23.00	-1.33		
				56640	3690.0	1	0		56784	3704.4	1	99	19.37	2.60	21.97	0.157	23.00	-1.03		
				QPSK	56640	3690	100		0	QPSK	56784	3704.4	100	0	17.41	2.60	20.01	0.100	23.00	-2.99
			16-QAM	56640	3690	100	0	16-QAM	56784	3704.4	100	0	16.42	2.60	19.02	0.080	23.00	-3.98		
				64-QAM	56640	3690	100		0	64-QAM	56784	3704.4	100	0	15.6	2.60	18.20	0.066	23.00	-4.80
				256-QAM	56640	3690	100		0	256-QAM	56784	3704.4	100	0	14.49	2.60	17.09	0.051	23.00	-5.91
			QPSK	55340	3560.0	1	99	QPSK	55511	3577.1	1	0	19.24	2.60	21.84	0.153	23.00	-1.16		
				55990	3625.0	1	99		56161	3642.1	1	0	18.83	2.60	21.43	0.139	23.00	-1.57		
56640	3690.0	1		0	56811	3707.1	1		99	19.16	2.60	21.76	0.150	23.00	-1.24					
Max	LTE B48	20MHz + 15MHz	QPSK	55340	3560	100	0	QPSK	55511	3577.1	100	0	17.34	2.60	19.94	0.099	23.00	-3.06		
				16-QAM	55340	3560	100		0	16-QAM	55511	3577.1	100	0	16.42	2.60	19.02	0.080	23.00	-3.98
				64-QAM	55340	3560	100		0	64-QAM	55511	3577.1	100	0	16.26	2.60	18.86	0.077	23.00	-4.14
			256-QAM	55340	3560	100	0	256-QAM	55511	3577.1	100	0	14.35	2.60	16.95	0.050	23.00	-6.05		
				55340	3560.0	1	99		55538	3579.8	1	0	19.14	2.60	21.74	0.149	23.00	-1.26		
				55990	3625.0	1	99		56188	3644.8	1	0	18.99	2.60	21.59	0.144	23.00	-1.41		
			QPSK	56640	3690.0	1	0	QPSK	56442	3670.2	1	99	19.3	2.60	21.90	0.155	23.00	-1.10		
				QPSK	56640	3690	100		0	QPSK	56442	3670.2	100	0	17.51	2.60	20.11	0.103	23.00	-2.89
16-QAM	56640	3690		100	0	16-QAM	56442		3670.2	100	0	16.43	2.60	19.03	0.080	23.00	-3.97			
64-QAM	56640	3690	100	0	64-QAM	56442	3670.2	100	0	15.6	2.60	18.20	0.066	23.00	-4.80					
	256-QAM	56640	3690	100		0	256-QAM	56442	3670.2	100	0	14.55	2.60	17.15	0.052	23.00	-5.85			

Table 7-4. EIRP Data (ULCA Band 48)


FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
Page 59 of 86		

7.6.2 Antenna 2 – EIRP

LTE Band 48

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
5 MHz	QPSK	3552.5	1.70	1 / 24	20.22	21.92	0.156	23.00	-1.08
		3625.0	1.70	1 / 12	20.26	21.96	0.157	23.00	-1.04
		3697.5	1.70	1 / 12	20.30	22.00	0.158	23.00	-1.00
	16-QAM	3552.5	1.70	1 / 12	19.30	21.00	0.126	23.00	-2.00
	64-QAM	3552.5	1.70	1 / 12	19.30	21.00	0.126	23.00	-2.00
	256-QAM	3552.5	1.70	1 / 12	16.27	17.97	0.063	23.00	-5.03
10 MHz	QPSK	3555.0	1.70	1 / 25	20.30	22.00	0.158	23.00	-1.00
		3625.0	1.70	1 / 25	20.04	21.74	0.149	23.00	-1.26
		3695.0	1.70	1 / 49	20.22	21.92	0.156	23.00	-1.08
	16-QAM	3695.0	1.70	1 / 49	19.43	21.13	0.130	23.00	-1.87
	64-QAM	3555.0	1.70	1 / 25	18.31	20.01	0.100	23.00	-2.99
	256-QAM	3555.0	1.70	1 / 25	15.49	17.19	0.052	23.00	-5.81
15 MHz	QPSK	3557.5	1.70	1 / 37	20.18	21.88	0.154	23.00	-1.12
		3625.0	1.70	1 / 74	20.23	21.93	0.156	23.00	-1.07
		3692.5	1.70	1 / 74	20.30	22.00	0.158	23.00	-1.00
	16-QAM	3692.5	1.70	1 / 74	19.48	21.18	0.131	23.00	-1.82
	64-QAM	3625.0	1.70	1 / 37	18.35	20.05	0.101	23.00	-2.95
	256-QAM	3692.5	1.70	1 / 37	16.28	17.98	0.063	23.00	-5.02
20 MHz	QPSK	3560.0	1.70	1 / 50	20.28	21.98	0.158	23.00	-1.02
		3625.0	1.70	1 / 50	20.30	22.00	0.158	23.00	-1.00
		3690.0	1.70	1 / 50	20.30	22.00	0.158	23.00	-1.00
	16-QAM	3625.0	1.70	1 / 50	19.60	21.30	0.135	23.00	-1.70
	64-QAM	3560.0	1.70	1 / 50	18.45	20.15	0.104	23.00	-2.85
	256-QAM	3625.0	1.70	1 / 50	16.30	18.00	0.063	23.00	-5.00


Table 7-5. EIRP Data (LTE Band 48)

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 60 of 86

ULCA LTE Band 48

Power State	Band	Bandwidth (PCC + SCC)	PCC					SCC					ULCA Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
			Modulation	UL Channel	UL Frequency [MHz]	UL # RB	UL RB Offset	Modulation	UL Channel	UL Frequency [MHz]	UL # RB	UL RB Offset						
Max	LTE B48	20MHz + 5MHz	QPSK	55340	3560.0	1	99	QPSK	55457	3571.7	1	0	20.03	1.70	21.73	0.149	23.00	-1.27
				55990	3625.0	1	99		56107	3636.7	1	0	20.06	1.70	21.76	0.150	23.00	-1.24
				56640	3690.0	1	0		56757	3701.7	1	99	20.3	1.70	22.00	0.158	23.00	-1.00
			QPSK	56640	3690	100	0	QPSK	56757	3701.7	100	0	18.33	1.70	20.03	0.101	23.00	-2.97
				16-QAM	56640	3690	100		56757	3701.7	100	0	17.34	1.70	19.04	0.080	23.00	-3.96
				64-QAM	56640	3690	100		56757	3701.7	100	0	16.53	1.70	18.23	0.067	23.00	-4.77
			256-QAM	56640	3690	100	0	256-QAM	56757	3701.7	100	0	15.34	1.70	17.04	0.051	23.00	-5.96
				55340	3560.0	1	99		55484	3574.4	1	0	20.22	1.70	21.92	0.156	23.00	-1.08
				55990	3625.0	1	99		56134	3639.4	1	0	19.92	1.70	21.62	0.145	23.00	-1.38
				56640	3690.0	1	0		56784	3704.4	1	99	20.12	1.70	21.82	0.152	23.00	-1.18
Max	LTE B48	20MHz + 10MHz	QPSK	55340	3560	100	0	QPSK	55484	3574.4	100	0	18.27	1.70	19.97	0.099	23.00	-3.03
				16-QAM	55340	3560	100		55484	3574.4	100	0	17.27	1.70	18.97	0.079	23.00	-4.03
				64-QAM	55340	3560	100		55484	3574.4	100	0	16.42	1.70	18.12	0.065	23.00	-4.88
			256-QAM	55340	3560	100	0	256-QAM	55484	3574.4	100	0	15.24	1.70	16.94	0.049	23.00	-6.06
				55340	3560.0	1	99		55511	3577.1	1	0	20.14	1.70	21.84	0.153	23.00	-1.16
				55990	3625.0	1	99		56161	3642.1	1	0	19.97	1.70	21.67	0.147	23.00	-1.33
				56640	3690.0	1	0		56811	3707.1	1	99	20.16	1.70	21.86	0.153	23.00	-1.14
			QPSK	56640	3690	100	0	QPSK	56811	3707.1	100	0	18.43	1.70	20.13	0.103	23.00	-2.87
				16-QAM	56640	3690	100		56811	3707.1	100	0	17.43	1.70	19.13	0.082	23.00	-3.87
				64-QAM	56640	3690	100		56811	3707.1	100	0	16.86	1.70	18.56	0.072	23.00	-4.44
Max	LTE B48	20MHz + 20MHz	QPSK	55340	3560.0	1	99	QPSK	55538	3579.8	1	0	20.17	1.70	21.87	0.154	23.00	-1.13
				55990	3625.0	1	99		56188	3644.8	1	0	19.96	1.70	21.66	0.147	23.00	-1.34
				56640	3690.0	1	0		56442	3670.2	1	99	19.99	1.70	21.69	0.148	23.00	-1.31
			QPSK	55340	3560	100	0	QPSK	55538	3579.8	100	0	18.09	1.70	19.79	0.095	23.00	-3.21
				16-QAM	55340	3560	100		55538	3579.8	100	0	17.26	1.70	18.96	0.079	23.00	-4.04
				64-QAM	55340	3560	100		55538	3579.8	100	0	16.31	1.70	18.01	0.063	23.00	-4.99
			256-QAM	55340	3560	100	0	256-QAM	55538	3579.8	100	0	15.44	1.70	17.14	0.052	23.00	-5.86
				55340	3560.0	1	99		55538	3579.8	1	0	20.17	1.70	21.87	0.154	23.00	-1.13
				55990	3625.0	1	99		56188	3644.8	1	0	19.96	1.70	21.66	0.147	23.00	-1.34
				56640	3690.0	1	0		56442	3670.2	1	99	19.99	1.70	21.69	0.148	23.00	-1.31
			QPSK	55340	3560	100	0	QPSK	55538	3579.8	100	0	18.09	1.70	19.79	0.095	23.00	-3.21
				16-QAM	55340	3560	100		55538	3579.8	100	0	17.26	1.70	18.96	0.079	23.00	-4.04
				64-QAM	55340	3560	100		55538	3579.8	100	0	16.31	1.70	18.01	0.063	23.00	-4.99
			256-QAM	55340	3560	100	0	256-QAM	55538	3579.8	100	0	15.44	1.70	17.14	0.052	23.00	-5.86

Table 7-6. EIRP Data (ULCA Band 48)


FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 61 of 86

7.6.3 Antenna 4 – EIRP

LTE Band 48

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
5 MHz	QPSK	3552.5	2.10	1 / 24	19.41	21.51	0.142	23.00	-1.49
		3625.0	2.10	1 / 24	19.90	22.00	0.158	23.00	-1.00
		3697.5	2.10	1 / 24	19.77	21.87	0.154	23.00	-1.13
	16-QAM	3625.0	2.10	1 / 12	18.67	20.77	0.119	23.00	-2.23
	64-QAM	3552.5	2.10	1 / 24	17.51	19.61	0.091	23.00	-3.39
	256-QAM	3552.5	2.10	1 / 24	15.54	17.64	0.058	23.00	-5.36
10 MHz	QPSK	3555.0	2.10	1 / 25	19.90	22.00	0.158	23.00	-1.00
		3625.0	2.10	1 / 25	19.68	21.78	0.151	23.00	-1.22
		3695.0	2.10	1 / 49	19.67	21.77	0.150	23.00	-1.23
	16-QAM	3625.0	2.10	1 / 25	19.04	21.14	0.130	23.00	-1.86
	64-QAM	3625.0	2.10	1 / 25	17.86	19.96	0.099	23.00	-3.04
	256-QAM	3555.0	2.10	1 / 0	14.88	16.98	0.050	23.00	-6.02
15 MHz	QPSK	3557.5	2.10	1 / 37	19.87	21.97	0.157	23.00	-1.03
		3625.0	2.10	1 / 74	19.90	22.00	0.158	23.00	-1.00
		3692.5	2.10	1 / 74	19.87	21.97	0.157	23.00	-1.03
	16-QAM	3625.0	2.10	1 / 74	19.12	21.22	0.132	23.00	-1.78
	64-QAM	3625.0	2.10	1 / 74	18.03	20.13	0.103	23.00	-2.87
	256-QAM	3557.5	2.10	1 / 74	15.09	17.19	0.052	23.00	-5.81
20 MHz	QPSK	3560.0	2.10	1 / 50	19.88	21.98	0.158	23.00	-1.02
		3625.0	2.10	1 / 50	19.90	22.00	0.158	23.00	-1.00
		3690.0	2.10	1 / 50	19.78	21.88	0.154	23.00	-1.12
	16-QAM	3625.0	2.10	1 / 50	19.26	21.36	0.137	23.00	-1.64
	64-QAM	3560.0	2.10	1 / 99	18.06	20.16	0.104	23.00	-2.84
	256-QAM	3560.0	2.10	1 / 50	14.98	17.08	0.051	23.00	-5.92


Table 7-7. EIRP Data (LTE Band 48)

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 62 of 86

ULCA LTE Band 48

Power State	Band	Bandwidth (PCC + SCC)	PCC				SCC				ULCA Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]				
			Modulation	UL Channel	Frequency [MHz]	UL # RB	UL RB Offset	Modulation	UL Channel	Frequency [MHz]							UL # RB	UL RB Offset		
Max	LTE B48	20MHz + 5MHz	QPSK	55340	3560.0	1	99	QPSK	55457	3571.7	1	0	19.78	2.10	21.96	0.157	23.00	-1.04		
				55990	3625.0	1	99		56107	3636.7	1	0	19.78	2.10	21.88	0.154	23.00	-1.12		
				56640	3690.0	1	0		56757	3701.7	1	99	19.75	2.10	21.85	0.153	23.00	-1.15		
			QPSK	55340	3560	100	0	QPSK	55457	3571.7	100	0	17.79	2.10	19.89	0.097	23.00	-3.11		
				16-QAM	55340	3560	100		0	16-QAM	55457	3571.7	100	0	16.81	2.10	18.91	0.078	23.00	-4.09
				64-QAM	55340	3560	100		0	64-QAM	55457	3571.7	100	0	15.87	2.10	17.97	0.063	23.00	-5.03
Max	LTE B48	20MHz + 10MHz	QPSK	55340	3560.0	1	99	QPSK	55457	3571.7	100	0	14.87	2.10	16.97	0.050	23.00	-6.03		
				55990	3625.0	1	99		56134	3639.4	1	0	19.9	2.10	22.00	0.158	23.00	-1.00		
				56640	3690.0	1	0		56784	3704.4	1	99	19.58	2.10	21.68	0.147	23.00	-1.32		
			QPSK	55990	3625	100	0	QPSK	56134	3639.4	100	0	17.9	2.10	20.00	0.100	23.00	-3.00		
				16-QAM	55990	3625	100		0	16-QAM	56134	3639.4	100	0	16.9	2.10	19.00	0.079	23.00	-4.00
				64-QAM	55990	3625	100		0	64-QAM	56134	3639.4	100	0	15.9	2.10	18.00	0.063	23.00	-5.00
Max	LTE B48	20MHz + 15MHz	QPSK	55990	3625	100	0	QPSK	56134	3639.4	100	0	15.27	2.10	17.37	0.055	23.00	-5.63		
				55340	3560.0	1	99		55511	3577.1	1	0	19.72	2.10	21.82	0.152	23.00	-1.18		
				55990	3625.0	1	99		56161	3642.1	1	0	19.8	2.10	21.90	0.155	23.00	-1.10		
			QPSK	56640	3690.0	1	0	QPSK	56811	3707.1	1	99	19.7	2.10	21.80	0.151	23.00	-1.20		
				55990	3625	100	0		QPSK	56161	3642.1	100	0	17.88	2.10	19.98	0.100	23.00	-3.02	
				16-QAM	55990	3625	100		0	16-QAM	56161	3642.1	100	0	16.94	2.10	19.04	0.080	23.00	-3.96
Max	LTE B48	20MHz + 20MHz	QPSK	55990	3625	100	0	QPSK	56161	3642.1	100	0	15.95	2.10	18.05	0.064	23.00	-4.95		
				55990	3625	100	0		256-QAM	56161	3642.1	100	0	14.88	2.10	16.98	0.050	23.00	-6.02	
				55340	3560.0	1	99		55538	3579.8	1	0	19.74	2.10	21.84	0.153	23.00	-1.16		
			QPSK	55990	3625.0	1	99	QPSK	56188	3644.8	1	0	19.72	2.10	21.82	0.152	23.00	-1.18		
				56640	3690.0	1	0		56442	3670.2	1	99	19.62	2.10	21.72	0.149	23.00	-1.28		
				QPSK	55340	3560	100		0	QPSK	55538	3579.8	100	0	17.81	2.10	19.91	0.098	23.00	-3.09
QPSK	55340	3560	100	0	QPSK	55538	3579.8	100	0	16.94	2.10	19.04	0.080	23.00	-3.96					
	64-QAM	55340	3560	100		0	64-QAM	55538	3579.8	100	0	15.88	2.10	17.98	0.063	23.00	-5.02			
	256-QAM	55340	3560	100		0	256-QAM	55538	3579.8	100	0	14.94	2.10	17.04	0.051	23.00	-5.96			

Table 7-8. EIRP Data (ULCA Band 48)


FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 63 of 86

7.6.4 Antenna 1a – EIRP

LTE Band 48

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
5 MHz	QPSK	3552.5	2.60	1 / 24	19.60	22.20	0.166	23.00	-0.80
		3625.0	2.60	1 / 0	19.45	22.05	0.160	23.00	-0.95
		3697.5	2.60	1 / 24	19.52	22.12	0.163	23.00	-0.88
	16-QAM	3552.5	2.60	1 / 24	18.75	21.35	0.136	23.00	-1.65
	64-QAM	3552.5	2.60	1 / 24	17.87	20.47	0.111	23.00	-2.53
	256-QAM	3697.5	2.60	1 / 12	14.94	17.54	0.057	23.00	-5.46
10 MHz	QPSK	3555.0	2.60	1 / 25	19.60	22.20	0.166	23.00	-0.80
		3625.0	2.60	1 / 49	19.43	22.03	0.160	23.00	-0.97
		3695.0	2.60	1 / 49	19.57	22.17	0.165	23.00	-0.83
	16-QAM	3555.0	2.60	1 / 25	18.87	21.47	0.140	23.00	-1.53
	64-QAM	3625.0	2.60	1 / 25	17.41	20.01	0.100	23.00	-2.99
	256-QAM	3555.0	2.60	1 / 25	14.98	17.58	0.057	23.00	-5.42
15 MHz	QPSK	3557.5	2.60	1 / 0	19.51	22.11	0.163	23.00	-0.89
		3625.0	2.60	1 / 74	19.34	21.94	0.156	23.00	-1.06
		3692.5	2.60	1 / 74	19.60	22.20	0.166	23.00	-0.80
	16-QAM	3692.5	2.60	1 / 74	18.49	21.09	0.129	23.00	-1.91
	64-QAM	3557.5	2.60	1 / 0	17.49	20.09	0.102	23.00	-2.91
	256-QAM	3557.5	2.60	1 / 0	15.11	17.71	0.059	23.00	-5.29
20 MHz	QPSK	3560.0	2.60	1 / 0	19.57	22.17	0.165	23.00	-0.83
		3625.0	2.60	1 / 50	19.60	22.20	0.166	23.00	-0.80
		3690.0	2.60	1 / 50	19.54	22.14	0.164	23.00	-0.86
	16-QAM	3560.0	2.60	1 / 0	18.86	21.46	0.140	23.00	-1.54
	64-QAM	3690.0	2.60	1 / 0	17.60	20.20	0.105	23.00	-2.80
	256-QAM	3625.0	2.60	1 / 50	14.92	17.52	0.056	23.00	-5.48


Table 7-9. EIRP Data (LTE Band 48)

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 64 of 86

ULCA LTE Band 48

Power State	Band	Bandwidth (PCC + SCC)	PCC				SCC				ULCA Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]				
			Modulation	UL Channel	Frequency [MHz]	UL # RB	UL RB Offset	Modulation	UL Channel	Frequency [MHz]							UL # RB	UL RB Offset		
Max	LTE B48	20MHz + 5MHz	QPSK	55340	3560.0	1	99	QPSK	55457	3571.7	1	0	19.33	2.60	21.93	0.156	23.00	-1.07		
				55990	3625.0	1	99		56107	3636.7	1	0	19.36	2.60	21.96	0.157	23.00	-1.04		
				56640	3690.0	1	0		56757	3701.7	1	99	19.6	2.60	22.20	0.166	23.00	-0.80		
			QPSK	56640	3690	100	0	QPSK	56757	3701.7	100	0	17.63	2.60	20.23	0.105	23.00	-2.77		
				16-QAM	56640	3690	100		0	16-QAM	56757	3701.7	100	0	16.64	2.60	19.24	0.084	23.00	-3.76
				64-QAM	56640	3690	100		0	64-QAM	56757	3701.7	100	0	15.83	2.60	18.43	0.070	23.00	-4.57
Max	LTE B48	20MHz + 10MHz	QPSK	55340	3560.0	1	99	QPSK	55484	3574.4	1	0	19.52	2.60	22.12	0.163	23.00	-0.88		
				55990	3625.0	1	99		56134	3639.4	1	0	19.22	2.60	21.82	0.152	23.00	-1.18		
				56640	3690.0	1	0		56784	3704.4	1	99	19.42	2.60	22.02	0.159	23.00	-0.98		
			QPSK	55340	3560	100	0	QPSK	55484	3574.4	100	0	17.57	2.60	20.17	0.104	23.00	-2.83		
				16-QAM	55340	3560	100		0	16-QAM	55484	3574.4	100	0	16.57	2.60	19.17	0.083	23.00	-3.83
				64-QAM	55340	3560	100		0	64-QAM	55484	3574.4	100	0	15.72	2.60	18.32	0.068	23.00	-4.68
Max	LTE B48	20MHz + 15MHz	QPSK	55340	3560	100	0	QPSK	55484	3574.4	100	0	14.54	2.60	17.14	0.052	23.00	-5.86		
				55340	3560.0	1	99		55511	3577.1	1	0	19.44	2.60	22.04	0.160	23.00	-0.96		
				55990	3625.0	1	99		56161	3642.1	1	0	19.27	2.60	21.87	0.154	23.00	-1.13		
			QPSK	56640	3690.0	1	0	QPSK	56811	3707.1	1	99	19.46	2.60	22.06	0.161	23.00	-0.94		
				QPSK	56640	3690	100		0	QPSK	56811	3707.1	100	0	17.73	2.60	20.33	0.108	23.00	-2.67
				16-QAM	56640	3690	100		0	16-QAM	56811	3707.1	100	0	16.73	2.60	19.33	0.086	23.00	-3.67
Max	LTE B48	20MHz + 20MHz	QPSK	55340	3560	100	0	QPSK	55484	3574.4	100	0	15.72	2.60	18.32	0.068	23.00	-4.68		
				55340	3560	100	0		256-QAM	55484	3574.4	100	0	14.54	2.60	17.14	0.052	23.00	-5.86	
				55340	3560.0	1	99		55511	3577.1	1	0	19.44	2.60	22.04	0.160	23.00	-0.96		
			QPSK	55990	3625.0	1	99	QPSK	56161	3642.1	1	0	19.27	2.60	21.87	0.154	23.00	-1.13		
				56640	3690.0	1	0		56811	3707.1	1	99	19.46	2.60	22.06	0.161	23.00	-0.94		
				QPSK	56640	3690	100		0	QPSK	56811	3707.1	100	0	17.73	2.60	20.33	0.108	23.00	-2.67
Max	LTE B48	20MHz + 20MHz	QPSK	55340	3560	100	0	QPSK	55484	3574.4	100	0	15.72	2.60	18.32	0.068	23.00	-4.68		
				55340	3560	100	0		256-QAM	55484	3574.4	100	0	14.54	2.60	17.14	0.052	23.00	-5.86	
				55340	3560.0	1	99		55538	3579.8	1	0	19.47	2.60	22.07	0.161	23.00	-0.93		
			QPSK	55990	3625.0	1	99	QPSK	56188	3644.8	1	0	19.26	2.60	21.86	0.153	23.00	-1.14		
				56640	3690.0	1	0		56442	3670.2	1	99	19.29	2.60	21.89	0.155	23.00	-1.11		
				QPSK	55340	3560	100		0	QPSK	55538	3579.8	100	0	17.39	2.60	19.99	0.100	23.00	-3.01
Max	LTE B48	20MHz + 20MHz	QPSK	55340	3560	100	0	QPSK	55538	3579.8	100	0	16.56	2.60	19.16	0.082	23.00	-3.84		
				55340	3560	100	0		64-QAM	55538	3579.8	100	0	15.61	2.60	18.21	0.066	23.00	-4.79	
				55340	3560	100	0		256-QAM	55538	3579.8	100	0	14.74	2.60	17.34	0.054	23.00	-5.66	
			QPSK	55340	3560.0	1	99	QPSK	55538	3579.8	100	0	14.74	2.60	17.34	0.054	23.00	-5.66		
				55990	3625.0	1	99		56188	3644.8	1	0	19.26	2.60	21.86	0.153	23.00	-1.14		
				56640	3690.0	1	0		56442	3670.2	1	99	19.29	2.60	21.89	0.155	23.00	-1.11		

Table 7-10. EIRP Data (ULCA Band 48)

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 65 of 86

7.7 Radiated Spurious Emissions

§2.1053 §96.41(e)

Test Overview

Radiated spurious emissions measurements are performed using the field strength conversion method described in KDB 971168 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized broadband hybrid antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed while the EUT is operating at maximum power and at the appropriate frequencies.

Test Procedures Used


KDB 971168 D01 v03r01 – Section 5.8

ANSI C63.26-2015

TIA-603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Max Hold (In cases where the level is within 2dB of the limit, the final measurement is taken using triggering/gating and trace averaging.)
7. The trace was allowed to stabilize

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 66 of 86

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

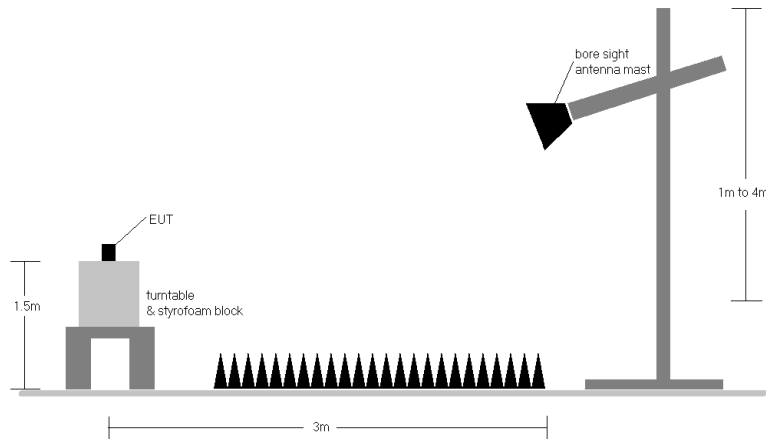



Figure 7-6. Test Instrument & Measurement Setup

Test Notes

- Field strengths are calculated using the Measurement quantity conversions in KDB 971168 Section 5.8.4.
 - $E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
 - $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V}/\text{m}) + 20\log D - 104.8$; where D is the measurement distance in meters.
- The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below. 1RB config was found and reported as a worst case RB size.
- This unit was tested with its standard battery.
- The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- The "-" shown in the following RSE tables are used to denote a noise floor measurement.
- Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- For LTE Band 48 pre-scans 1-18GHz, the RBW is set to 1MHz and VBW to 30kHz. For final measurements above 1GHz, the RBW is set to 1MHz and VBW to 3MHz when measuring with an RMS detector and max hold trace.
- Uplink carrier aggregation intra-band radiated spurious emissions measurements were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth. The worst case (highest) emissions were found while operating with QPSK modulation with both carriers set to transmit using 1RB

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 67 of 86

7.7.2 Antenna 3a Radiated Spurious Emissions Measurements

LTE Band 48

Bandwidth (MHz):	20								
Frequency (MHz):	3560.0								
Modulation Signal:	QPSK								
RB Config (Size / Offset):	1 / 50								
Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7120.0	V	-	-	-74.92	14.43	46.51	-48.75	-40.00	-8.75
10680.0	V	317	251	-75.96	17.85	48.89	-46.37	-40.00	-6.37
14240.0	V	-	-	-81.60	20.94	46.34	-48.92	-40.00	-8.92
17800.0	V	-	-	-84.20	26.34	49.14	-46.12	-40.00	-6.12


Table 7-11. Radiated Spurious Data (LTE Band 48 – Low Channel)

Bandwidth (MHz):	20								
Frequency (MHz):	3625.0								
Modulation Signal:	QPSK								
RB Config (Size / Offset):	1 / 50								
Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7250.0	V	-	-	-75.24	13.44	45.20	-50.06	-40.00	-10.06
10875.0	V	252	129	-77.23	18.50	48.27	-46.98	-40.00	-6.98
14500.0	V	-	-	-79.74	21.40	48.66	-46.60	-40.00	-6.60

Table 7-12. Radiated Spurious Data (LTE Band 48 – Mid Channel)

Bandwidth (MHz):	20								
Frequency (MHz):	3690.0								
Modulation Signal:	QPSK								
RB Config (Size / Offset):	1 / 50								
Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7380.00	V	-	-	-79.87	13.88	41.01	-54.25	-40.00	-14.25
11070.00	V	289	157	-77.20	18.37	48.17	-47.08	-40.00	-7.08
14760.00	V	-	-	-79.88	21.90	49.02	-46.24	-40.00	-6.24

Table 7-13. Radiated Spurious Data (LTE Band 48 – High Channel)

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 68 of 86

ULCA Band 48

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3560.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3579.8
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7120.0	V	-	-	-76.70	8.69	38.99	-56.27	-40.00	-16.27
10680.0	V	-	-	-76.08	12.29	43.21	-52.05	-40.00	-12.05
14240.0	V	-	-	-75.71	15.58	46.87	-48.39	-40.00	-8.39

Table 7-14. Radiated Spurious Data (ULCA Band 48– Low Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3625.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3644.8
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK



Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7250.0	V	-	-	-76.75	8.49	38.74	-56.52	-40.00	-16.52
10875.0	V	-	-	-75.90	12.28	43.38	-51.88	-40.00	-11.88
14500.0	V	-	-	-75.35	15.75	47.40	-47.86	-40.00	-7.86

Table 7-15. Radiated Spurious Data (ULCA Band 48– Mid Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3690.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3670.2
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7380.00	V	-	-	-76.61	8.73	39.12	-56.14	-40.00	-16.14
11070.00	V	-	-	-75.49	13.04	44.55	-50.71	-40.00	-10.71
14760.00	V	-	-	-75.41	15.83	47.42	-47.84	-40.00	-7.84

Table 7-16. Radiated Spurious Data (ULCA Band 48– High Channel)


FCC ID: BCGA2568	 PCTEST Proud to be part of 	PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 69 of 86

7.7.3 Antenna 2 Radiated Spurious Emissions Measurements


LTE Band 48

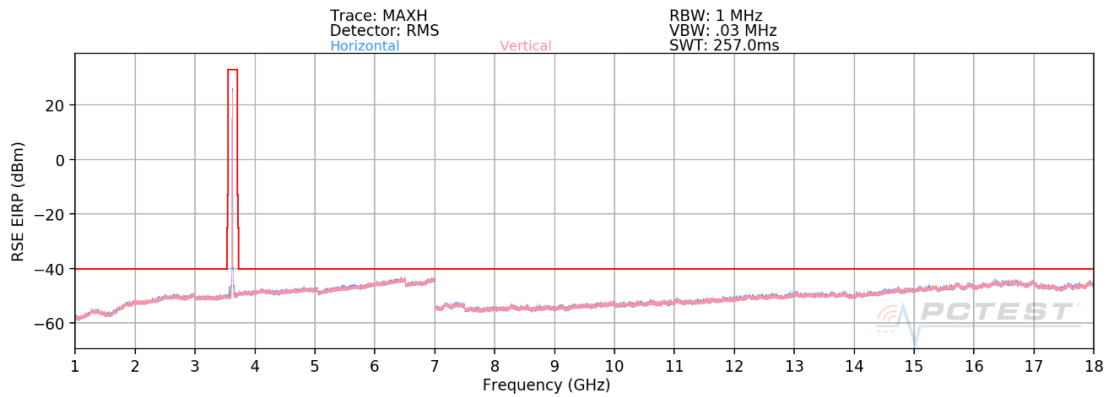

Plot 7-72. Radiated Spurious Plot 1 – 18GHz (LTE Band 48)

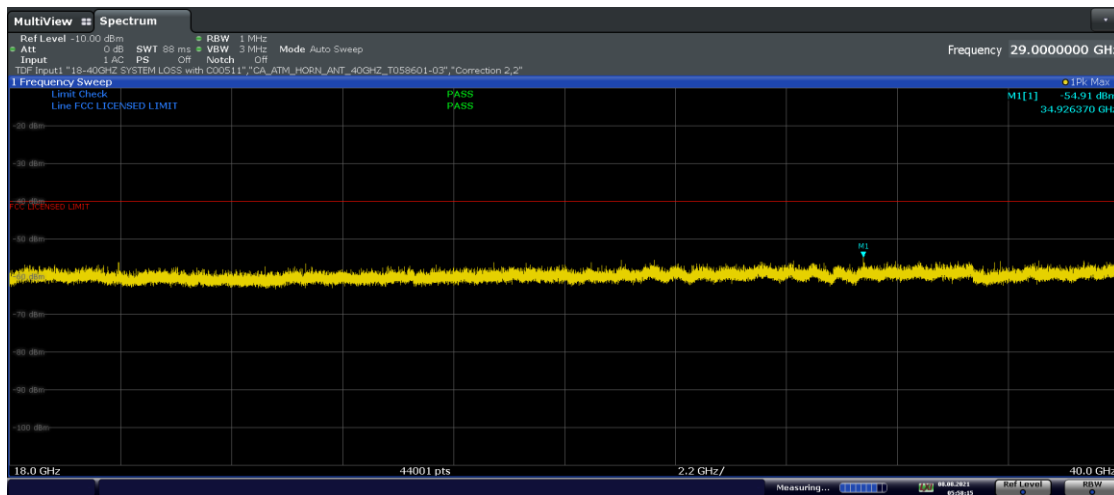

Plot 7-73. Radiated Spurious Plot 18 – 40GHz (LTE Band 48 – Ant. Pol H)

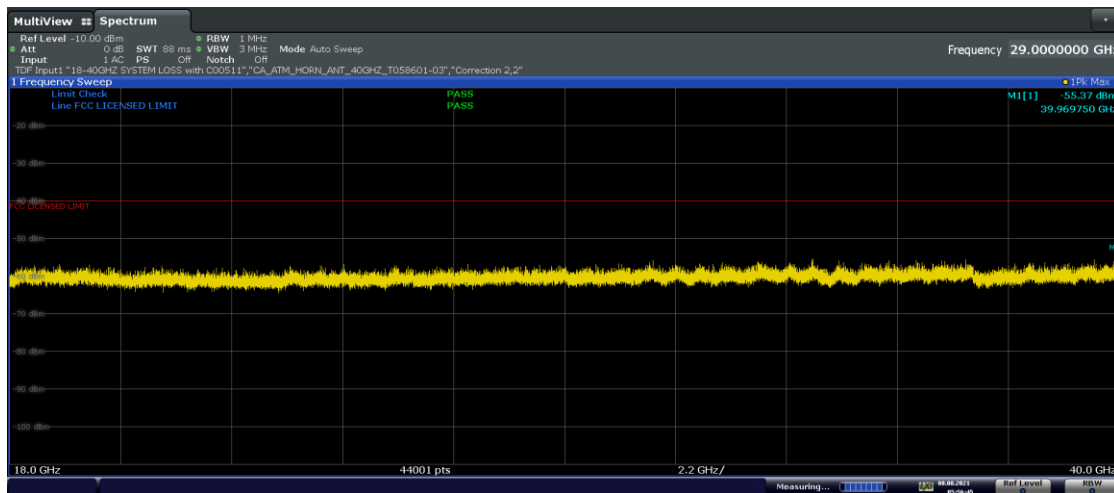

Plot 7-74. Radiated Spurious Plot 18 – 40GHz (LTE Band 48 – Ant. Pol V)

FCC ID: BCGA2568	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 70 of 86

Bandwidth (MHz):	20
Frequency (MHz):	3560.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7120.0	V	-	-	-77.84	11.51	40.67	-54.58	-40.00	-14.58
10680.0	V	-	-	-81.19	15.60	41.41	-53.85	-40.00	-13.85
14240.0	V	-	-	-81.79	18.74	43.95	-51.31	-40.00	-11.31
17800.0	V	-	-	-83.59	21.81	45.22	-50.04	-40.00	-10.04

Table 7-17. Radiated Spurious Data (LTE Band 48 – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	3625.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7250.0	V	151	49	-77.57	11.78	41.21	-54.05	-40.00	-14.05
10875.0	V	-	-	-79.89	15.72	42.83	-52.42	-40.00	-12.42
14500.0	V	-	-	-80.74	18.98	45.24	-50.02	-40.00	-10.02

Table 7-18. Radiated Spurious Data (LTE Band 48 – Mid Channel)


Bandwidth (MHz):	20
Frequency (MHz):	3690.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7380.00	V	-	-	-79.67	13.88	41.21	-54.05	-40.00	-14.05
11070.00	V	-	-	-80.14	18.37	45.23	-50.02	-40.00	-10.02
14760.00	V	-	-	-80.89	21.90	48.01	-47.25	-40.00	-7.25


Table 7-19. Radiated Spurious Data (LTE Band 48 – High Channel)

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 71 of 86


ULCA Band 48

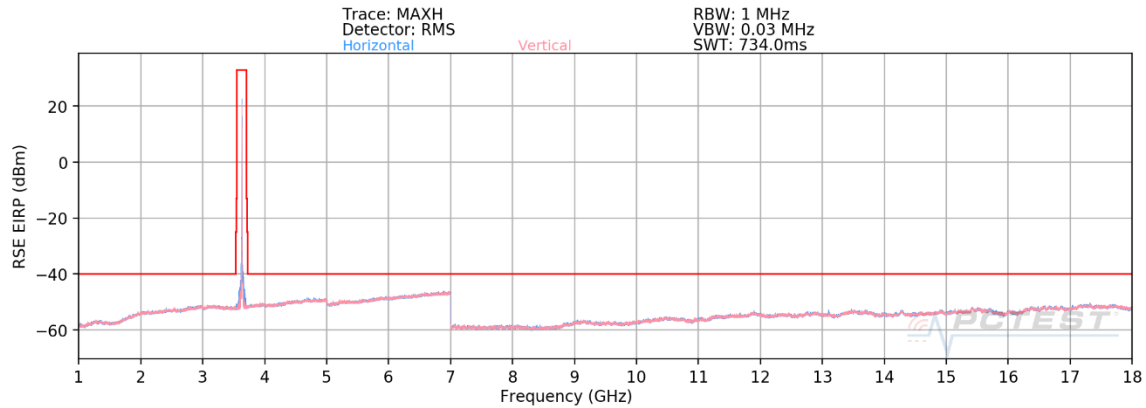

Plot 7-75. Radiated Spurious Plot 1 – 18GHz (ULCA Band 48)

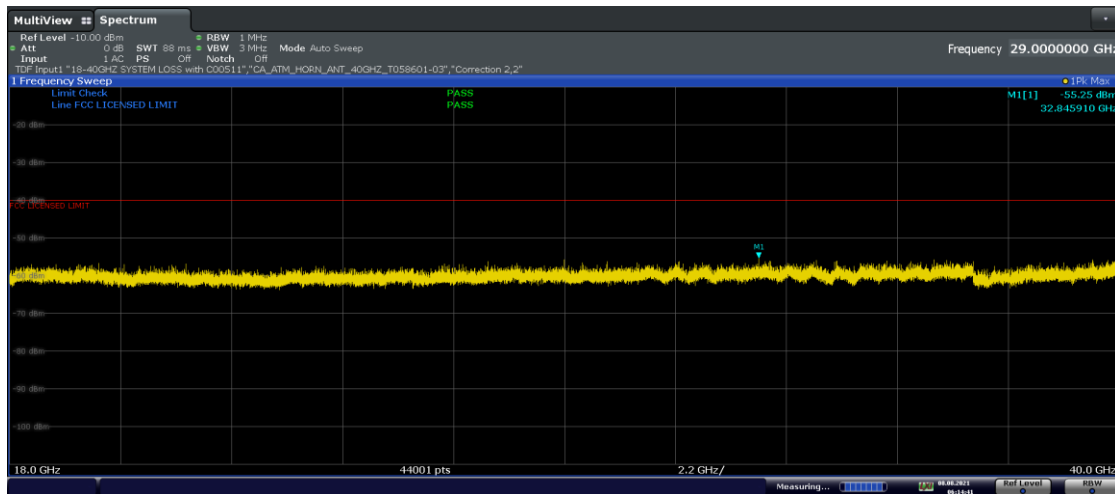

Plot 7-76. Radiated Spurious Plot 18 – 40GHz (ULCA Band 48, Ant. Pol H)

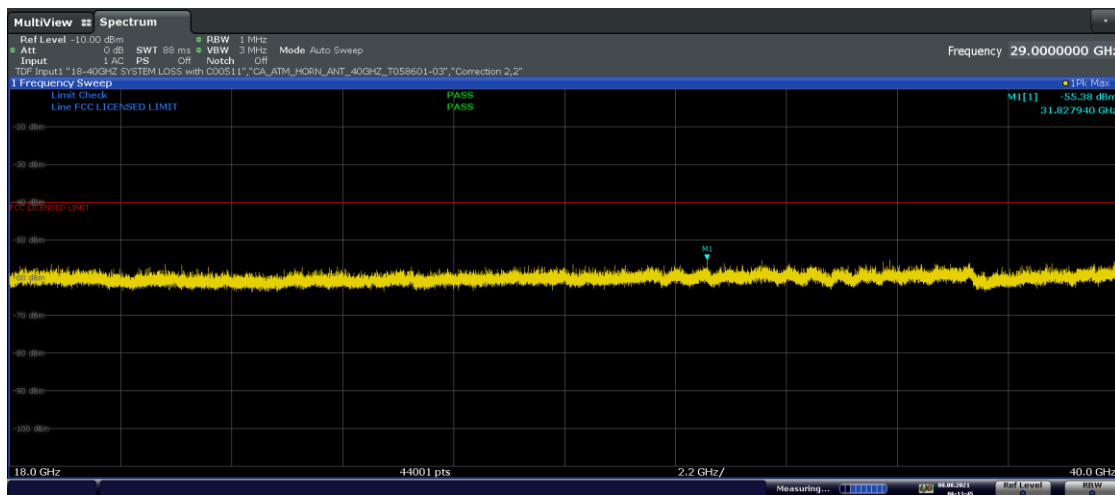

Plot 7-77. Radiated Spurious Plot 18 – 40GHz (ULCA Band 48, Ant. Pol V)

FCC ID: BCGA2568	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 72 of 86

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3560.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3579.8
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7120.0	V	-	-	-76.35	8.69	39.34	-55.92	-40.00	-15.92
10680.0	V	-	-	-75.48	12.29	43.81	-51.45	-40.00	-11.45
14240.0	V	-	-	-74.34	15.58	48.24	-47.02	-40.00	-7.02

Table 7-20. Radiated Spurious Data (ULCA Band 48– Low Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3625.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3644.8
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7250.0	V	-	-	-76.73	8.49	38.76	-56.50	-40.00	-16.50
10875.0	V	-	-	-76.14	12.28	43.14	-52.12	-40.00	-12.12
14500.0	V	-	-	-75.56	15.75	47.19	-48.07	-40.00	-8.07

Table 7-21. Radiated Spurious Data (ULCA Band 48– Mid Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3690.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3670.2
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7380.00	V	-	-	-76.67	8.73	39.06	-56.20	-40.00	-16.20
11070.00	V	-	-	-75.34	13.04	44.70	-50.56	-40.00	-10.56
14760.00	V	-	-	-75.61	15.83	47.22	-48.04	-40.00	-8.04

Table 7-22. Radiated Spurious Data (ULCA Band 48– High Channel)

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 73 of 86

7.7.4 Antenna 4 Radiated Spurious Emissions Measurements

LTE Band 48

Bandwidth (MHz):	20								
Frequency (MHz):	3560.0								
Modulation Signal:	QPSK								
RB Config (Size / Offset):	1 / 50								
Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7120.0	H	-	-	-79.73	11.51	38.78	-56.47	-40.00	-16.47
10680.0	H	-	-	-80.13	15.60	42.47	-52.79	-40.00	-12.79
14240.0	H	-	-	-80.08	18.74	45.66	-49.60	-40.00	-9.60


Table 7-23. Radiated Spurious Data (LTE Band 48 – Low Channel)

Bandwidth (MHz):	20								
Frequency (MHz):	3625.0								
Modulation Signal:	QPSK								
RB Config (Size / Offset):	1 / 50								
Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7250.0	H	-	-	-79.86	11.78	38.92	-56.34	-40.00	-16.34
10875.0	H	-	-	-80.29	15.72	42.43	-52.82	-40.00	-12.82
14500.0	H	-	-	-80.57	18.98	45.41	-49.85	-40.00	-9.85

Table 7-24. Radiated Spurious Data (LTE Band 48 – Mid Channel)

Bandwidth (MHz):	20								
Frequency (MHz):	3690.0								
Modulation Signal:	QPSK								
RB Config (Size / Offset):	1 / 50								
Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7380.00	H	-	-	-80.20	8.73	35.53	-59.73	-40.00	-19.73
11070.00	H	362	196	-77.12	13.04	42.92	-52.34	-40.00	-12.34
14760.00	H	-	-	-80.68	15.83	42.15	-53.11	-40.00	-13.11

Table 7-25. Radiated Spurious Data (LTE Band 48 – High Channel)

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 74 of 86

ULCA Band 48

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3560.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3579.8
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7120.0	V	-	-	-76.66	8.69	39.03	-56.23	-40.00	-16.23
10680.0	V	-	-	-77.19	12.29	42.10	-53.16	-40.00	-13.16
14240.0	V	-	-	-75.37	15.58	47.21	-48.05	-40.00	-8.05

Table 7-26. Radiated Spurious Data (ULCA Band 48– Low Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3625.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3644.8
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7250.0	V	-	-	-73.90	8.49	41.59	-53.67	-40.00	-13.67
10875.0	V	-	-	-74.47	12.28	44.81	-50.45	-40.00	-10.45
14500.0	V	-	-	-73.92	15.75	48.83	-46.43	-40.00	-6.43

Table 7-27. Radiated Spurious Data (ULCA Band 48– Mid Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3690.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3670.2
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7380.00	V	-	-	-72.14	8.73	43.59	-51.67	-40.00	-11.67
11070.00	V	-	-	-74.24	13.04	45.80	-49.46	-40.00	-9.46
14760.00	V	-	-	-74.61	15.83	48.22	-47.04	-40.00	-7.04

Table 7-28. Radiated Spurious Data (ULCA Band 48– High Channel)

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 75 of 86

7.7.5 Antenna 1a Radiated Spurious Emissions Measurements

LTE Band 48

Bandwidth (MHz):	20								
Frequency (MHz):	3560.0								
Modulation Signal:	QPSK								
RB Config (Size / Offset):	1 / 50								
Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7120.0	H	-	-	-77.87	8.69	37.82	-57.44	-40.00	-17.44
10680.0	H	-	-	-77.73	12.29	41.56	-53.70	-40.00	-13.70
14240.0	H	-	-	-77.46	15.58	45.12	-50.14	-40.00	-10.14


Table 7-29. Radiated Spurious Data (LTE Band 48 – Low Channel)

Bandwidth (MHz):	20								
Frequency (MHz):	3625.0								
Modulation Signal:	QPSK								
RB Config (Size / Offset):	1 / 50								
Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7250.0	H	-	-	-78.44	8.49	37.05	-58.21	-40.00	-18.21
10875.0	H	-	-	-78.67	12.28	40.61	-54.65	-40.00	-14.65
14500.0	H	-	-	-78.27	15.75	44.48	-50.78	-40.00	-10.78

Table 7-30. Radiated Spurious Data (LTE Band 48 – Mid Channel)

Bandwidth (MHz):	20								
Frequency (MHz):	3690.0								
Modulation Signal:	QPSK								
RB Config (Size / Offset):	1 / 50								
Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7380.00	H	-	-	-77.42	8.73	38.31	-56.95	-40.00	-16.95
11070.00	H	-	-	-77.67	13.04	42.37	-52.89	-40.00	-12.89
14760.00	H	-	-	-77.59	15.83	45.24	-50.02	-40.00	-10.02

Table 7-31. Radiated Spurious Data (LTE Band 48 – High Channel)

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 76 of 86

ULCA Band 48

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3560.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3579.8
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7120.0	H	-	-	-73.92	8.69	41.77	-53.49	-40.00	-13.49
10680.0	H	155	265	-71.40	12.29	47.89	-47.37	-40.00	-7.37
14240.0	H	-	-	-73.48	15.58	49.10	-46.16	-40.00	-6.16

Table 7-32. Radiated Spurious Data (ULCA Band 48– Low Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3625.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3644.8
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK



Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7250.0	H	-	-	-74.03	8.73	41.70	-53.56	-40.00	-13.56
10875.0	H	-	-	-74.22	13.04	45.82	-49.44	-40.00	-9.44
14500.0	H	-	-	-75.31	15.83	47.52	-47.74	-40.00	-7.74

Table 7-33. Radiated Spurious Data (ULCA Band 48– Mid Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3690.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3670.2
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7380.00	H	-	-	-73.25	8.73	42.48	-52.78	-40.00	-12.78
11070.00	H	-	-	-74.93	13.04	45.11	-50.15	-40.00	-10.15
14760.00	H	-	-	-74.72	15.83	48.11	-47.15	-40.00	-7.15


Table 7-34. Radiated Spurious Data (ULCA Band 48– High Channel)

FCC ID: BCGA2568	 PCTEST Proud to be part of 	PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 77 of 86


7.7.6 Simultaneous Tx Radiated Spurious Emissions Measurements

Description	LTE (Band 48)	Bluetooth
Antenna	Antenna 3a	Antenna 3a
Channel	55340	78
Operating Frequency (MHz)	3560	2480
Mode/Modulation	QPSK/1RB/20MHz	BDR/GFSK/ePA


Table 7-35. Worst Case Simultaneous Transmission Configuration

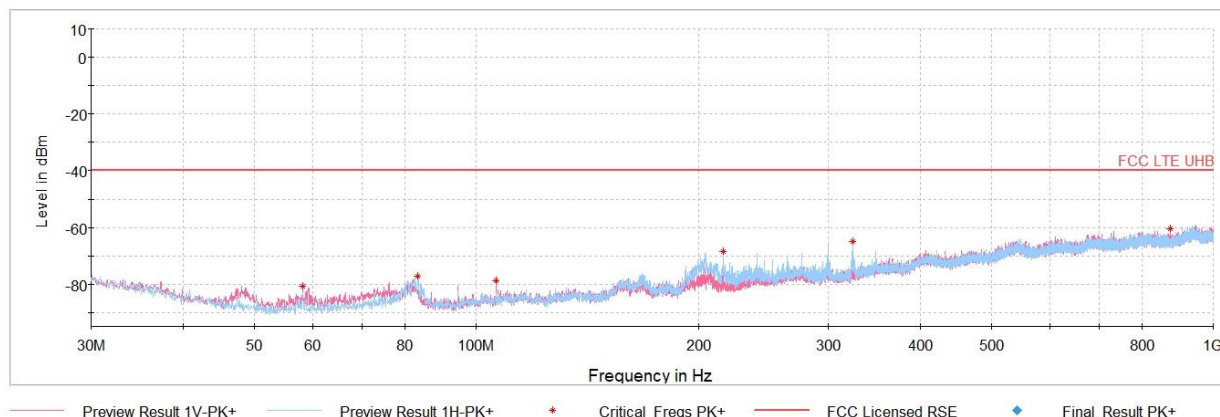


Plot 7-78. Radiated Spurious Emissions – Simultaneous Transmission 30MHz – 1GHz

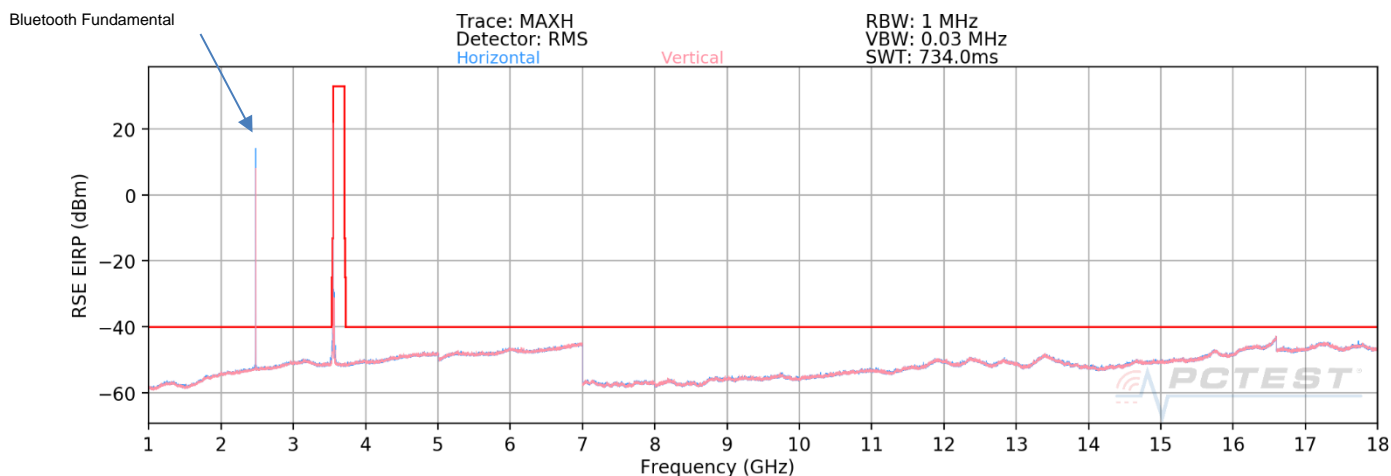


Plot 7-79. Radiated Spurious Emissions - Simultaneous Transmission 1-18GHz


FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 78 of 86

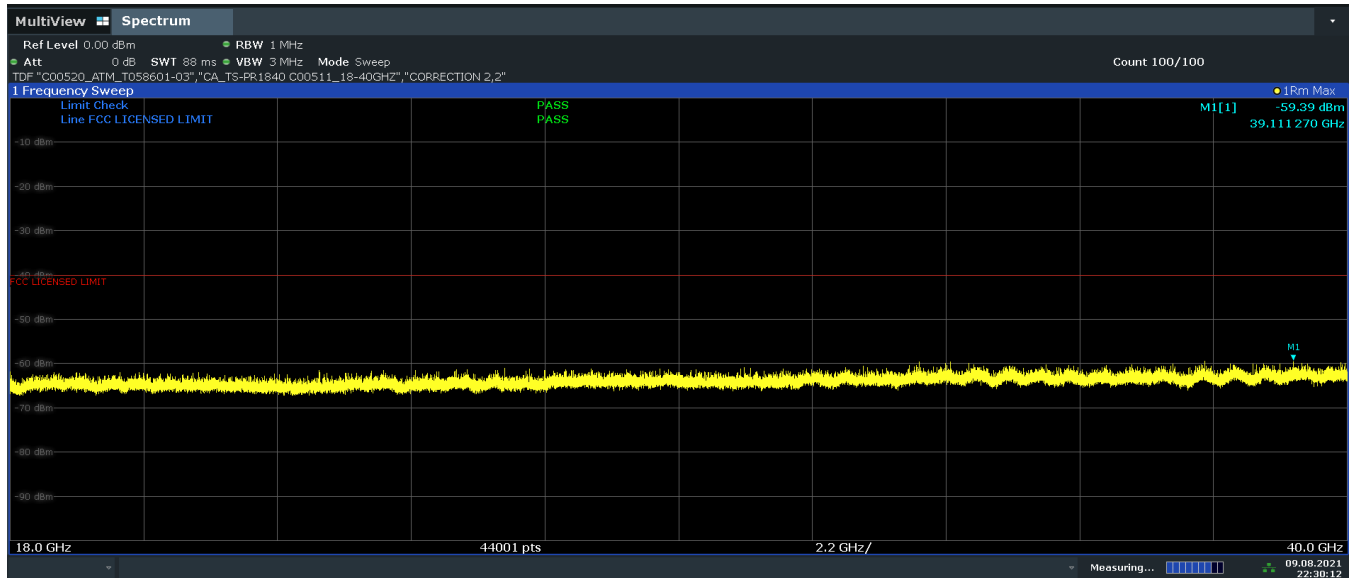

Plot 7-80. Radiated Spurious Emissions - Simultaneous Transmission 18GHz-40GHz Pol. H

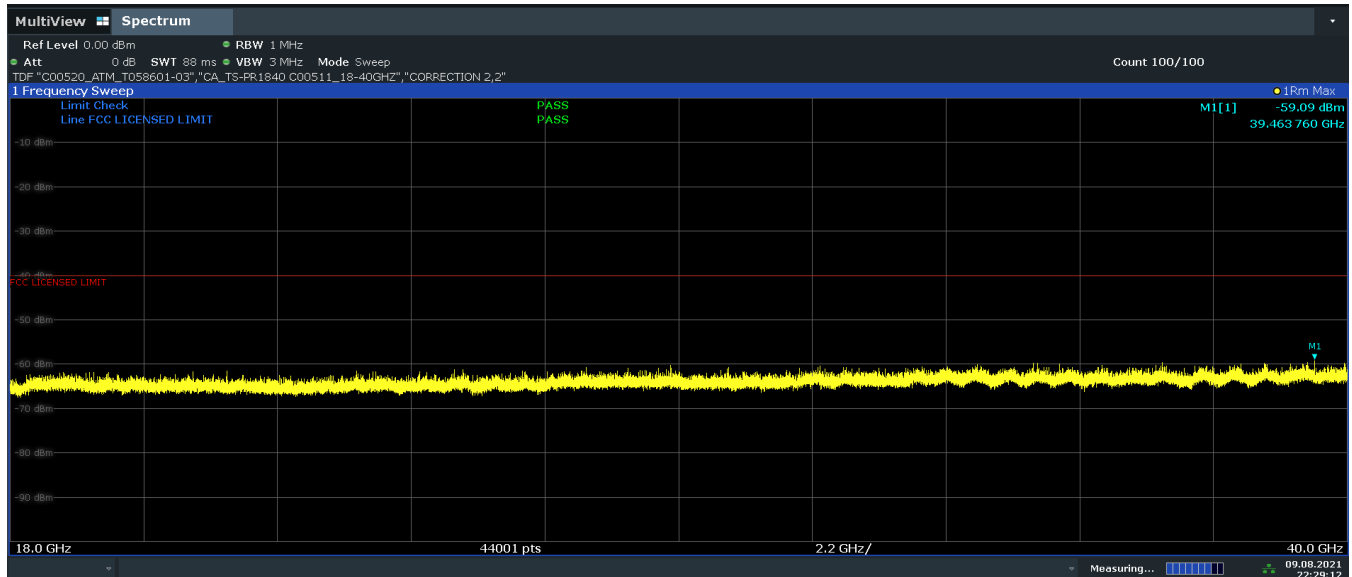

Plot 7-81. Radiated Spurious Emissions - Simultaneous Transmission 18GHz-40GHz Pol. V


FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 79 of 86

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Peak	V	-	-	-69.13	16.02	53.89	73.98	-20.09
7440.00	Peak	V	256	145	-66.19	14.24	55.05	73.98	-18.93
12400.00	Peak	V	-	-	-72.94	20.45	54.51	73.98	-19.46

Table 7-36. Bluetooth Harmonics Emissions Measurements in Simultaneous Transmission Mode

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7120.0	RMS	V	-	-	-84.38	14.43	37.05	-58.21	-40.00	-18.21
10680.0	RMS	V	-	-	-85.73	17.85	39.12	-56.14	-40.00	-16.14
14240.0	RMS	V	-	-	-87.41	20.94	40.53	-54.73	-40.00	-14.73
17800.0	RMS	V	-	-	-85.51	26.34	47.83	-47.43	-40.00	-7.43
1400.0	RMS	V	301	152	-73.28	5.45	39.17	-56.08	-40.00	-16.08
4640.0	RMS	V	390	41	-74.58	15.97	48.39	-46.86	-40.00	-6.86

Table 7-37. LTE Harmonics and Intermodulations Emissions Measurements in Simultaneous Transmission Mode

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 80 of 86

7.8 Frequency Stability / Temperature Variation §2.1055

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015 and TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 96, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI C63.26-2015

TIA-603-E-2016

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

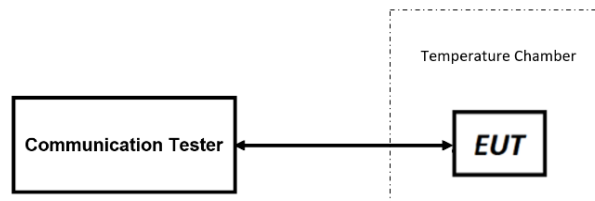



Figure 7-7. Test Instrument & Measurement Setup

Test Notes

All ports were tested and only the worst case data were reported.

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 81 of 86


Frequency Stability / Temperature Variation

LTE Band 48

Low Channel Frequency (Hz):	3,560,000,000
High Channel Frequency (Hz):	3,690,000,000
Ref. Voltage (VDC):	3.8

Voltage (%)	Power (VDC)	Temp (°C)	Low Freq. (Hz)	High Freq. (Hz)	Low Freq. Dev. (Hz)	High Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	3,559,999,973	3,689,999,971	-12	-14	-0.0000004
		- 20	3,559,999,975	3,689,999,973	-11	-13	-0.0000003
		- 10	3,559,999,972	3,689,999,974	-14	-11	-0.0000004
		0	3,559,999,974	3,689,999,971	-12	-14	-0.0000004
		+ 10	3,559,999,973	3,689,999,973	-13	-13	-0.0000003
		+ 20 (Ref)	3,559,999,986	3,689,999,985	0	0	0.0000000
		+ 30	3,559,999,974	3,689,999,975	-12	-11	-0.0000003
		+ 40	3,559,999,972	3,689,999,971	-14	-14	-0.0000004
		+ 50	3,559,999,972	3,689,999,971	-14	-15	-0.0000004
Battery Endpoint	3.23	+ 20	3,559,999,973	3,689,999,971	-13	-15	-0.0000004

Table 7-38. LTE Band 48 Frequency Stability Data

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 82 of 86

7.9 End User Device Additional Requirement (CBSD Protocol)

\$96.47

Test Overview and Limit

End user device additional requirements (CBSD Protocol) are tested per the test procedures listed below. During testing, the EUT is connected to a certified CBSD (Ruckus FCC ID: S9GQ910US00) as a companion device to show compliance with Part 96.47.

End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.

An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.

Test Procedure Used

KDB 940660 D01 v03

WINNF-TS-0122 v1.0.2



Test Setup/Method

The EUT was connected via an RF cable to a certified CBSD and spectrum analyzer. The following procedure is performed by applying WINNF-TS-0122 CBRS CBSD Test Specification.

1. Run#1:
 - a. Setup WINNF.PT.C.HBT.1 with 3570MHz – 3590MHz.
 - b. Enable AP service from Ruckus Cloud management.
 - c. Check EUT Tx frequency.
 - d. Disable AP service from Ruckus Cloud management and check EUT stop transmission within 10s.
2. Run#2:
 - a. Setup WINNF.PT.C.HBT.1 with 3550MHz – 3560MHz.
 - b. Enable AP service from Ruckus Cloud management.
 - c. Check EUT Tx frequency.
 - d. Disable AP service from Ruckus Cloud management and check EUT stop transmission within 10s.


Test Notes

The EUT is an End User Device.


FCC ID: BCGA2568	 PCTEST Proud to be part of 	PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 83 of 86

Run#1:

- Tx Frequency Set: 3570 – 3590MHz
- MaxEIRP Set: 10dBm/MHz

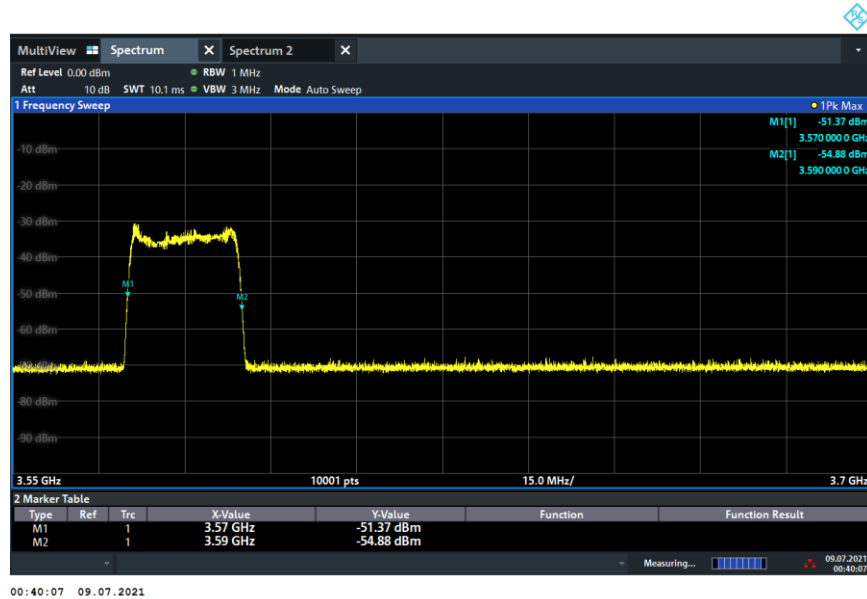

Plot 7-82. Run#1 End User Device Frequency of Operations

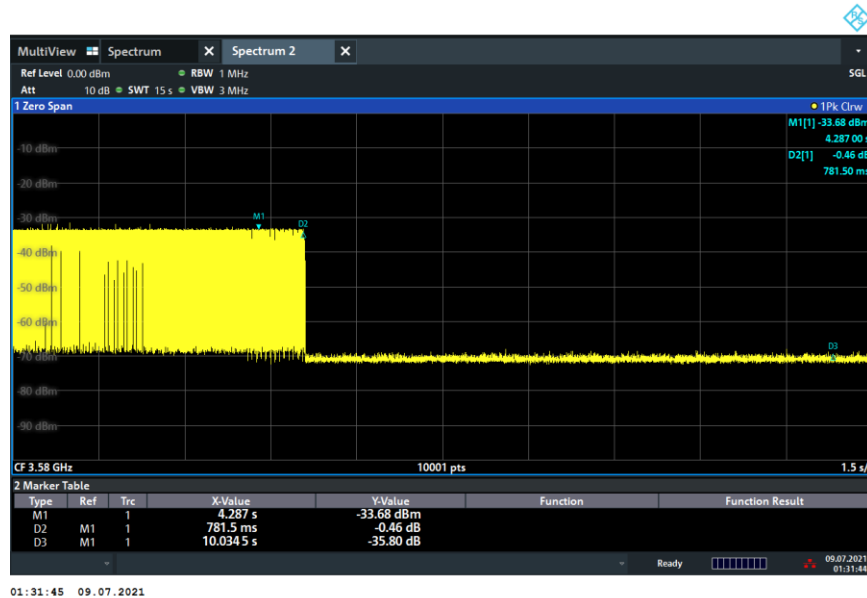

Plot 7-83. Run#1 End User Device Discontinues Operations within 10s


Note:

Marker 1: CBSD sends instructions to discontinue LTE operations.
 Marker 2: EUT discontinues operation.
 Marker 3: 10 seconds elapsed time from CBSD sending instructions to EUT.


FCC ID: BCGA2568	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 84 of 86

Run#2:

- Tx Frequency Set: 3590 – 3600MHz
- MaxEIRP Set: 10dBm/MHz

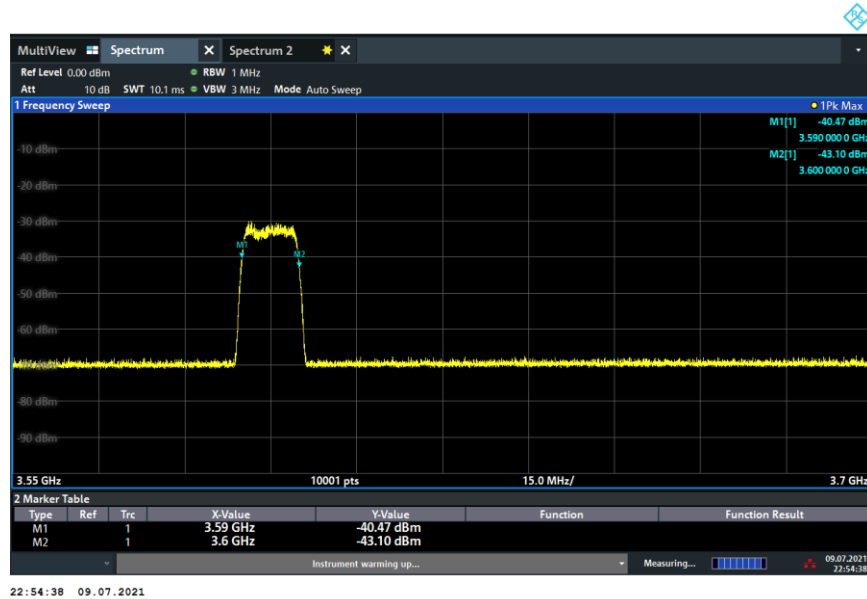

Plot 7-84. Run#2 End User Device Frequency of Operations

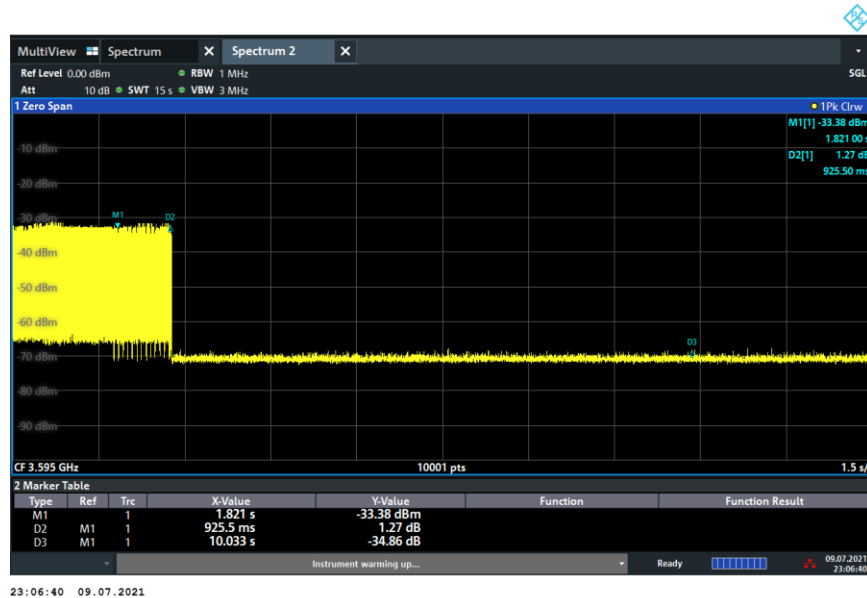

Plot 7-85. Run#2 End User Device Discontinues Operations within 10s


Note:

- Marker 1: CBSD sends instructions to discontinue LTE operations.
 Marker 2: EUT discontinues operation.
 Marker 3: 10 seconds elapsed time from CBSD sending instructions to EUT.

FCC ID: BCGA2568	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device	Page 85 of 86

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the Apple **Tablet Device FCC ID: BCGA2568** complies with all of the End User Device requirements of Part 96 of the FCC Rules for LTE operation only.

FCC ID: BCGA2568	 PART 96 MEASUREMENT REPORT	Approved by: Quality Manager
Test Report S/N: 1C2106080049-07-R1.BCG	Test Dates: 6/2/2021 - 8/20/2021	EUT Type: Tablet Device
		Page 86 of 86