



Mode: 802.11ax - SU  
 Data Rate: MCS3  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2442MHz  
 Channel: 7

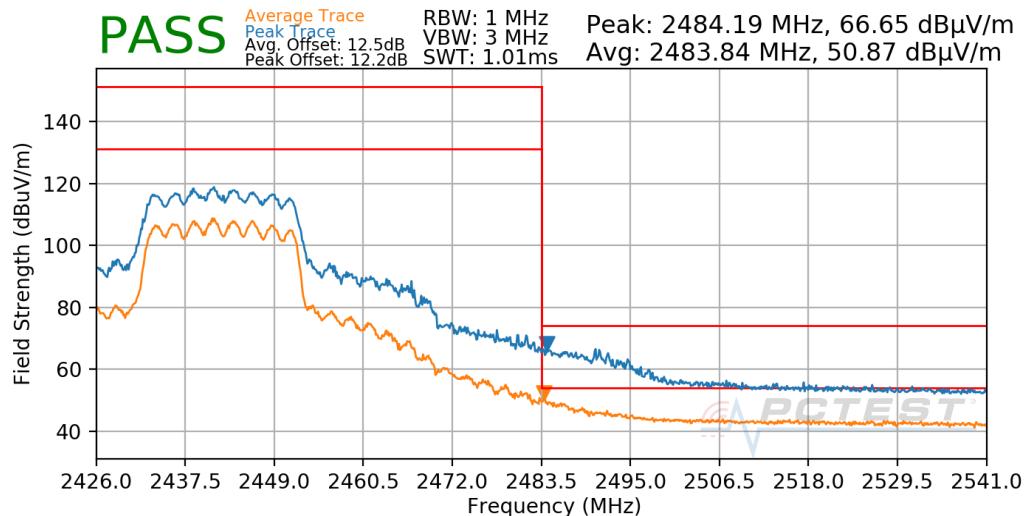

**Plot 7-717. Radiated Restricted Upper Band Edge Measurement CDD**


Mode: 802.11ax - SU  
 Data Rate: MCS5  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2442MHz  
 Channel: 7

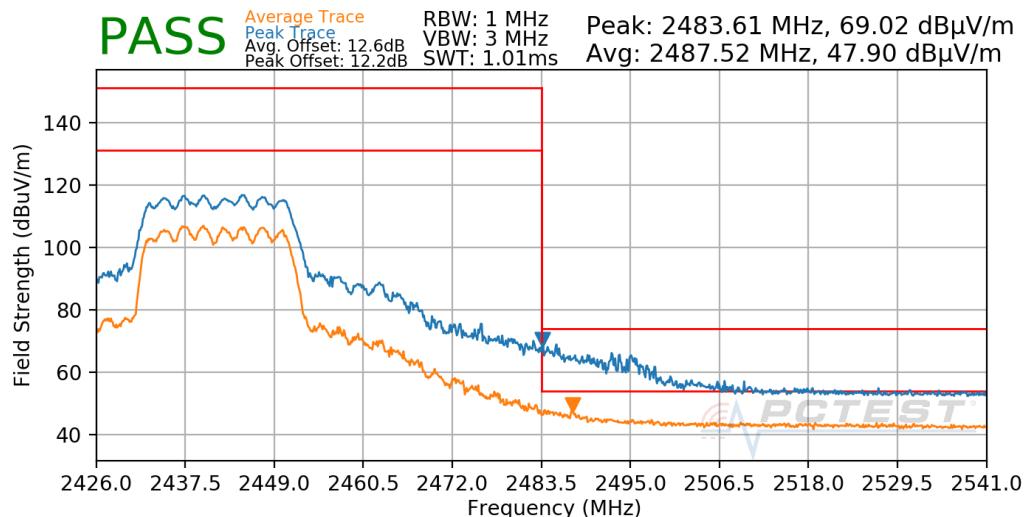

**Plot 7-718. Radiated Restricted Upper Band Edge Measurement CDD**


FCC ID: BCGA2588 IC: 579C-A2588	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2111150078-01.BCG	Test Dates: 12/02/2021 - 02/04/2022	EUT Type: Tablet Device	Page 423 of 443

Mode: 802.11ax - SU  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2447MHz  
 Channel: 8

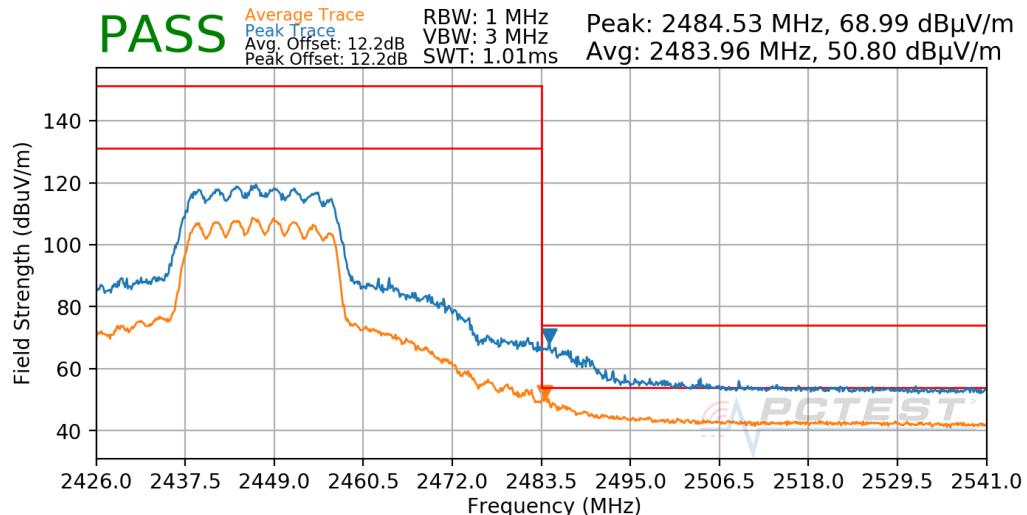

**Plot 7-719. Radiated Restricted Upper Band Edge Measurement CDD**


Mode: 802.11ax - SU  
 Data Rate: MCS3  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2447MHz  
 Channel: 8

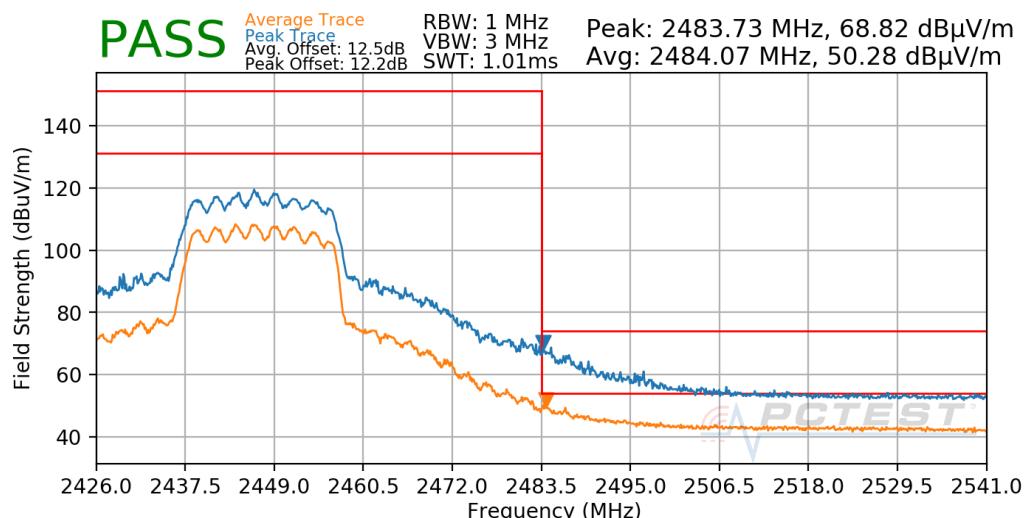

**Plot 7-720. Radiated Restricted Upper Band Edge Measurement CDD**


FCC ID: BCGA2588 IC: 579C-A2588	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2111150078-01.BCG	Test Dates: 12/02/2021 - 02/04/2022	EUT Type: Tablet Device	Page 424 of 443

Mode: 802.11ax - SU  
 Data Rate: MCS5  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2447MHz  
 Channel: 8

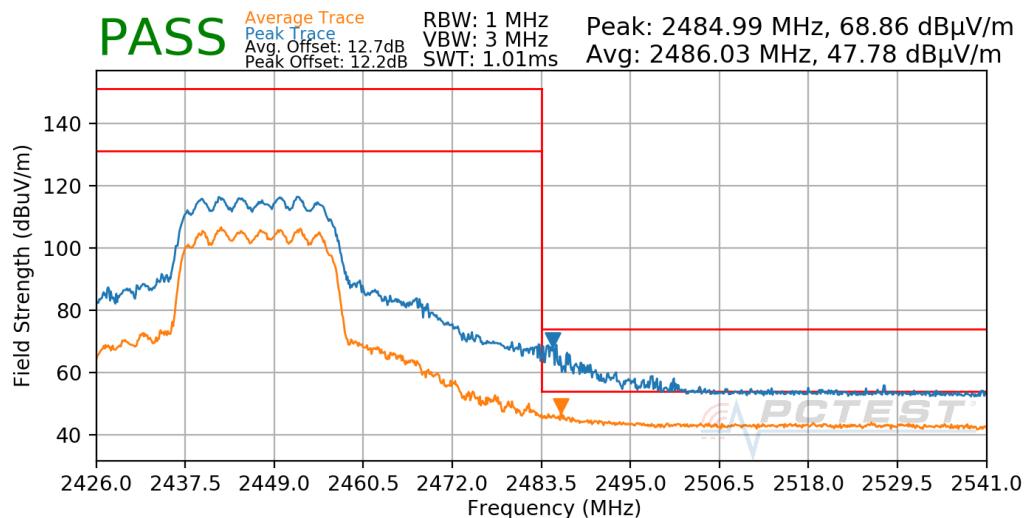

**Plot 7-721. Radiated Restricted Upper Band Edge Measurement CDD**


Mode: 802.11ax - SU  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2452MHz  
 Channel: 9

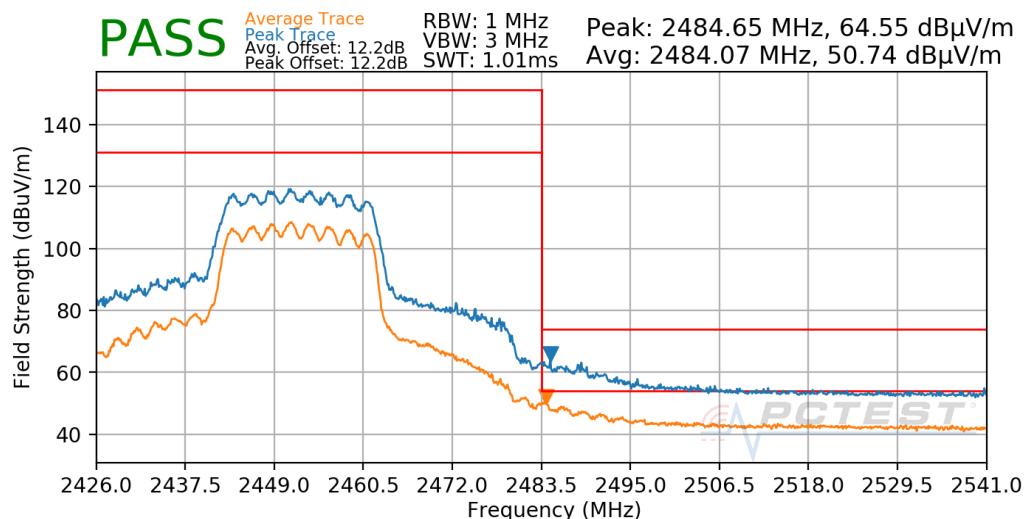

**Plot 7-722. Radiated Restricted Upper Band Edge Measurement CDD**


FCC ID: BCGA2588 IC: 579C-A2588	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2111150078-01.BCG	Test Dates: 12/02/2021 - 02/04/2022	EUT Type: Tablet Device	Page 425 of 443

Mode: 802.11ax - SU  
 Data Rate: MCS3  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2452MHz  
 Channel: 9

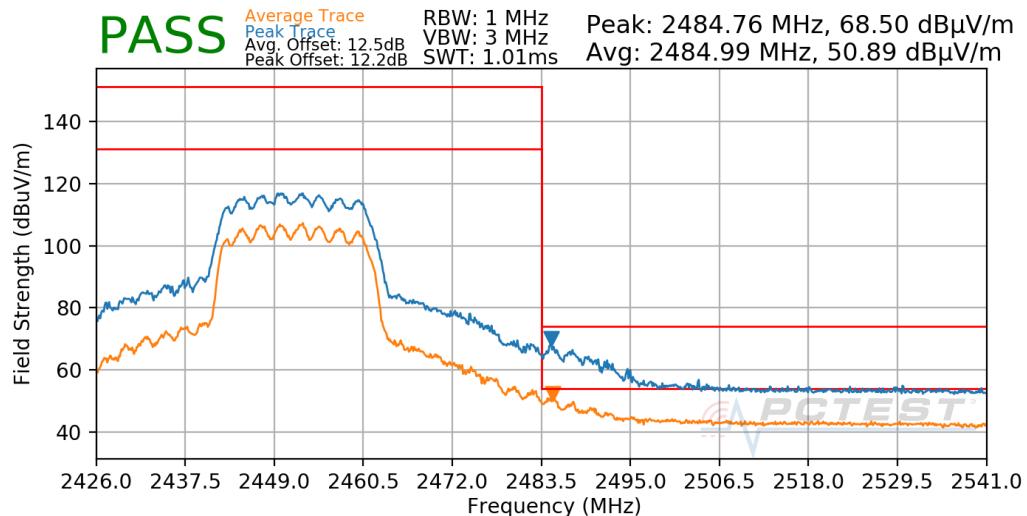

**Plot 7-723. Radiated Restricted Upper Band Edge Measurement CDD**


Mode: 802.11ax - SU  
 Data Rate: MCS5  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2452MHz  
 Channel: 9

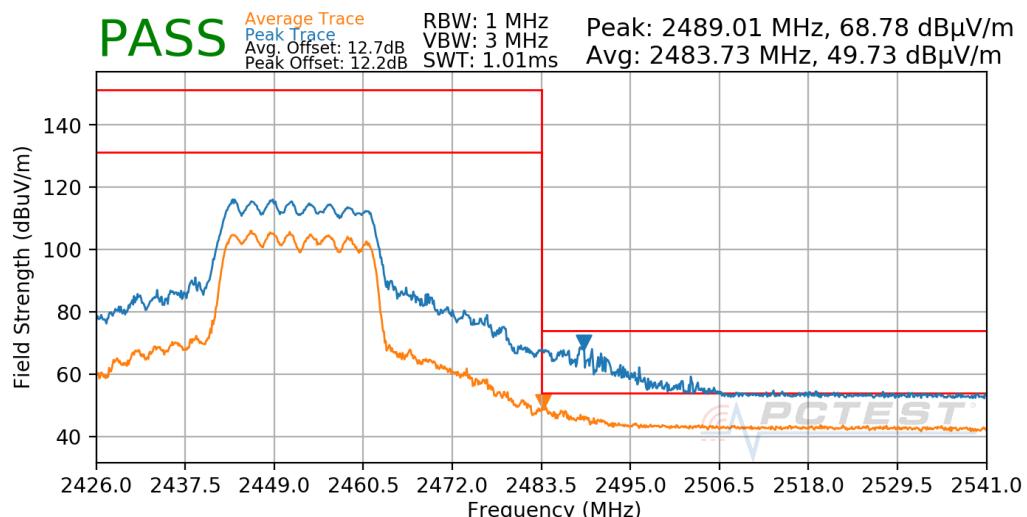

**Plot 7-724. Radiated Restricted Upper Band Edge Measurement CDD**


FCC ID: BCGA2588 IC: 579C-A2588	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2111150078-01.BCG	Test Dates: 12/02/2021 - 02/04/2022	EUT Type: Tablet Device	Page 426 of 443

Mode: 802.11ax - SU  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2457MHz  
 Channel: 10

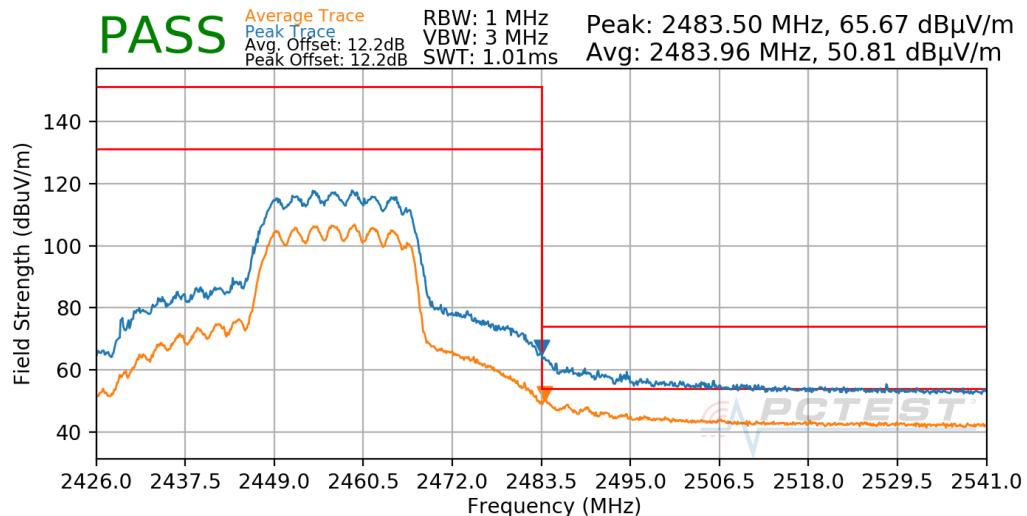

**Plot 7-725. Radiated Restricted Upper Band Edge Measurement CDD**


Mode: 802.11ax - SU  
 Data Rate: MCS3  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2457MHz  
 Channel: 10

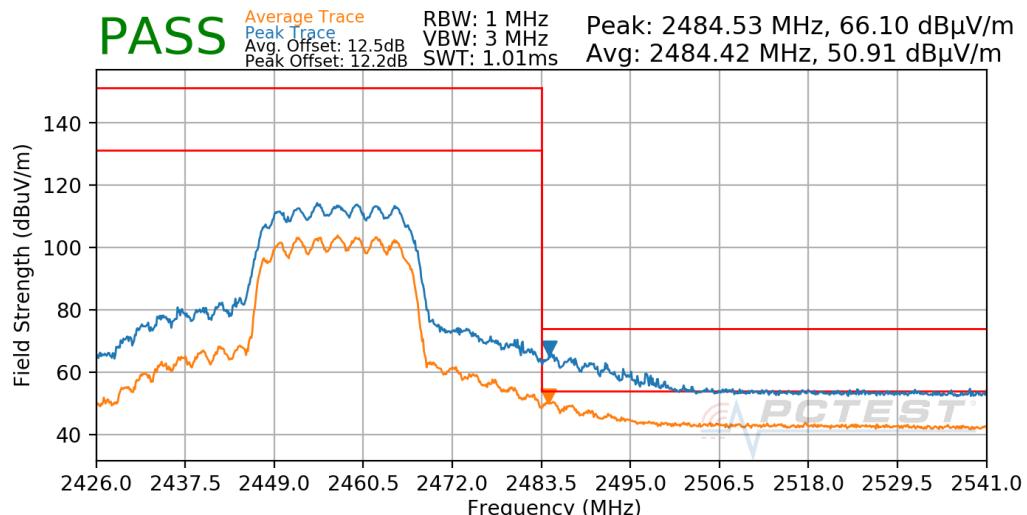

**Plot 7-726. Radiated Restricted Upper Band Edge Measurement CDD**


FCC ID: BCGA2588 IC: 579C-A2588	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2111150078-01.BCG	Test Dates: 12/02/2021 - 02/04/2022	EUT Type: Tablet Device	Page 427 of 443

Mode: 802.11ax - SU  
 Data Rate: MCS5  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2457MHz  
 Channel: 10

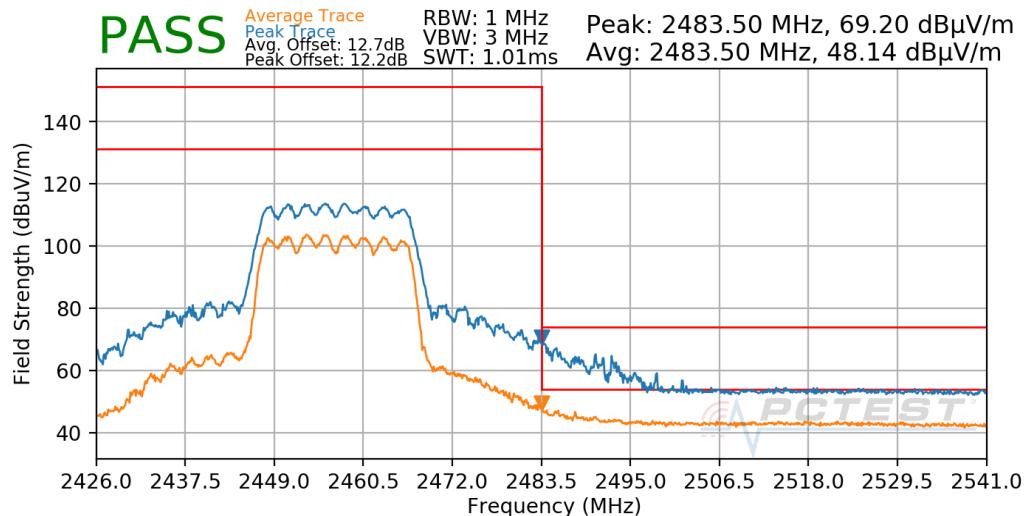

**Plot 7-727. Radiated Restricted Upper Band Edge Measurement CDD**


Mode: 802.11ax - SU  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

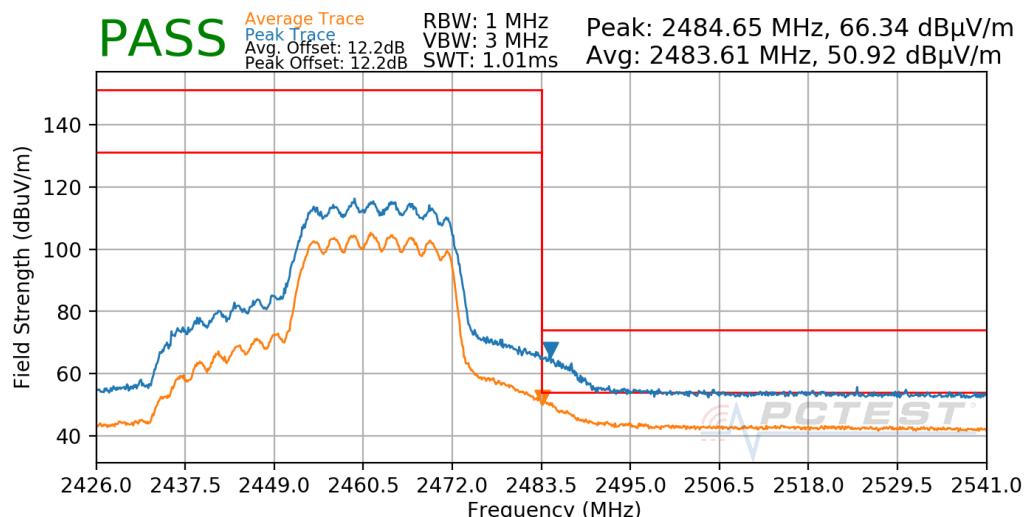

**Plot 7-728. Radiated Restricted Upper Band Edge Measurement CDD**


FCC ID: BCGA2588 IC: 579C-A2588	<b>PCTEST</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2111150078-01.BCG	Test Dates: 12/02/2021 - 02/04/2022	EUT Type: Tablet Device	Page 428 of 443	

Mode: 802.11ax - SU  
 Data Rate: MCS3  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

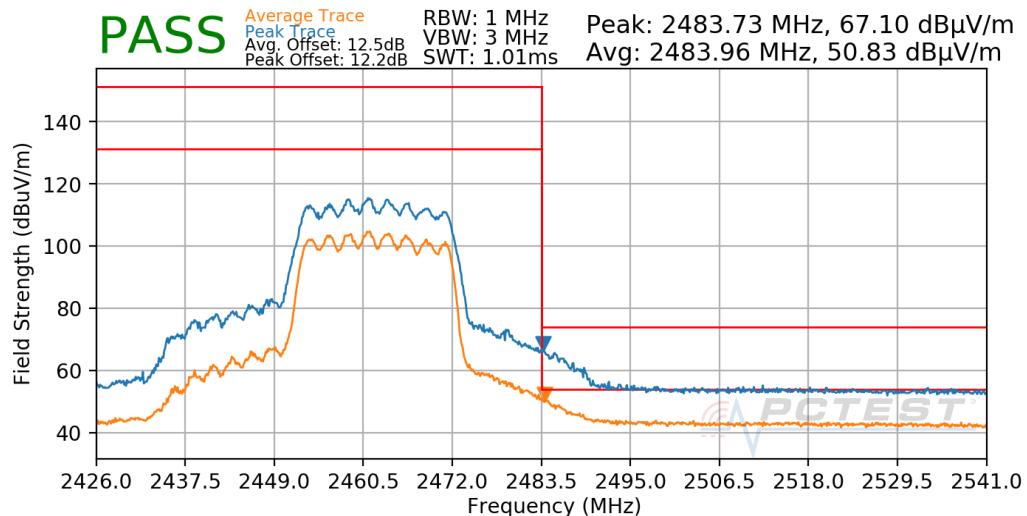

**Plot 7-729. Radiated Restricted Upper Band Edge Measurement CDD**


Mode: 802.11ax - SU  
 Data Rate: MCS5  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

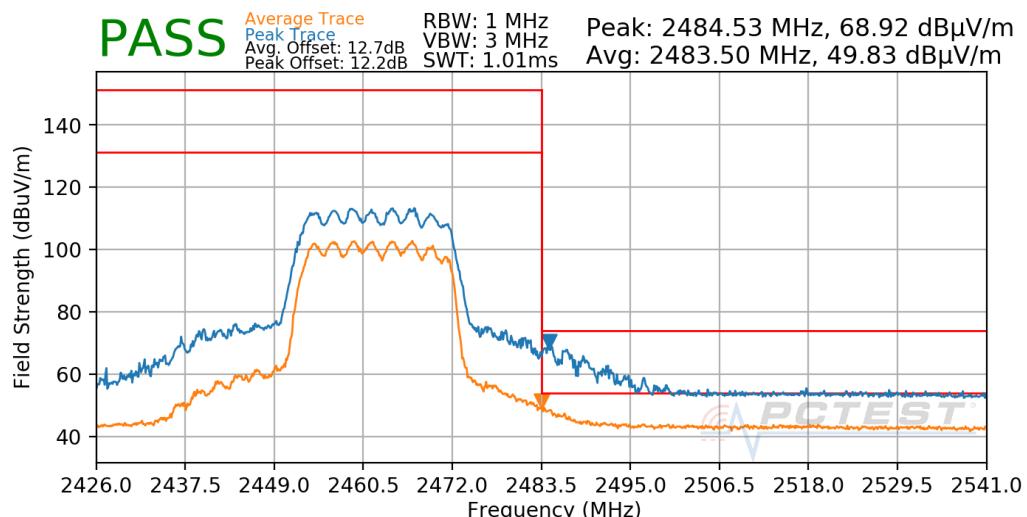

**Plot 7-730. Radiated Restricted Upper Band Edge Measurement CDD**


FCC ID: BCGA2588 IC: 579C-A2588	<b>PCTEST</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2111150078-01.BCG	Test Dates: 12/02/2021 - 02/04/2022	EUT Type: Tablet Device	Page 429 of 443	

Mode: 802.11ax - SU  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2467MHz  
 Channel: 12

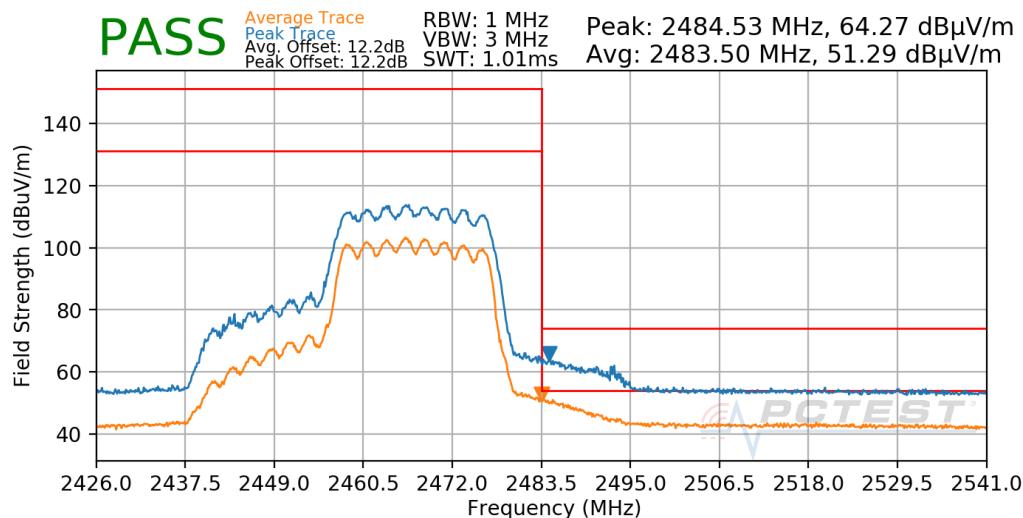

**Plot 7-731. Radiated Restricted Upper Band Edge Measurement CDD**


Mode: 802.11ax - SU  
 Data Rate: MCS3  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2467MHz  
 Channel: 12

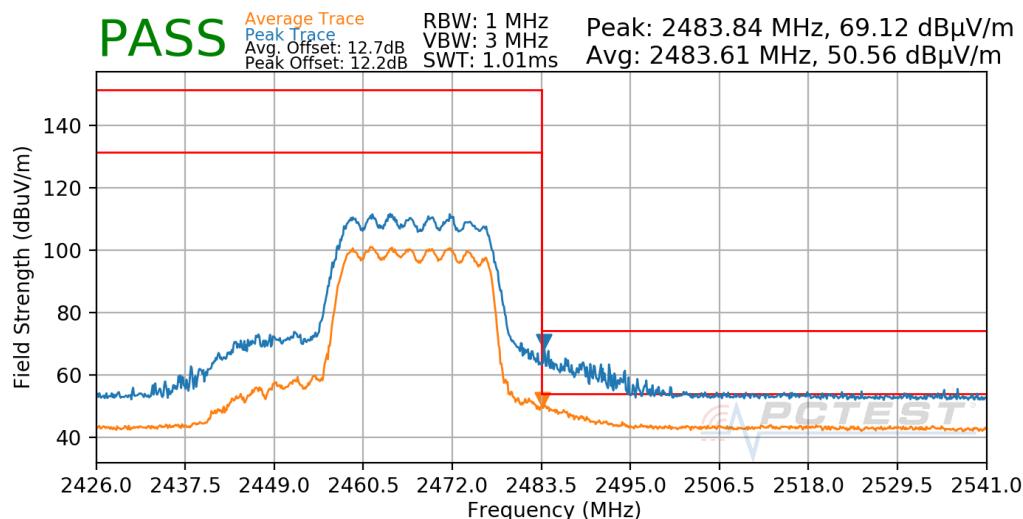

**Plot 7-732. Radiated Restricted Upper Band Edge Measurement CDD**

FCC ID: BCGA2588 IC: 579C-A2588	<b>PCTEST</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2111150078-01.BCG	Test Dates: 12/02/2021 - 02/04/2022	EUT Type: Tablet Device	Page 430 of 443	

Mode: 802.11ax - SU  
 Data Rate: MCS5  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2467MHz  
 Channel: 12

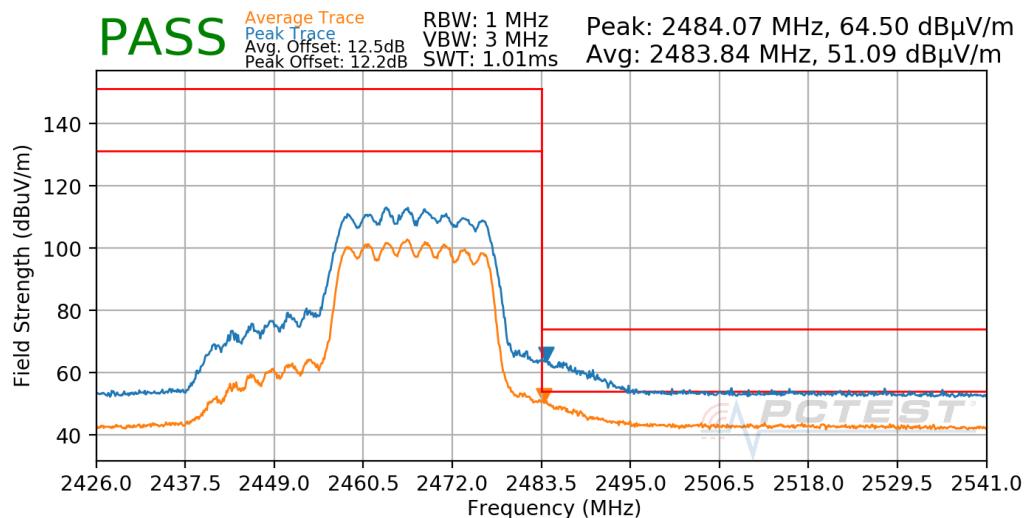

**Plot 7-733. Radiated Restricted Upper Band Edge Measurement CDD**

FCC ID: BCGA2588 IC: 579C-A2588	<b>PCTEST</b> Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2111150078-01.BCG	Test Dates: 12/02/2021 - 02/04/2022	EUT Type: Tablet Device	Page 431 of 443	

## 7.8 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-66 per Section 15.209 and RSS-Gen (8.9).***

Frequency	Field Strength [ $\mu$ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

**Table 7-66. Radiated Limits**

### Test Procedures Used

ANSI C63.10-2013

### Test Settings

#### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


#### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold


FCC ID: BCGA2588 IC: 579C-A2588	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2111150078-01.BCG	Test Dates: 12/02/2021 - 02/04/2022	EUT Type: Tablet Device	Page 432 of 443

## Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

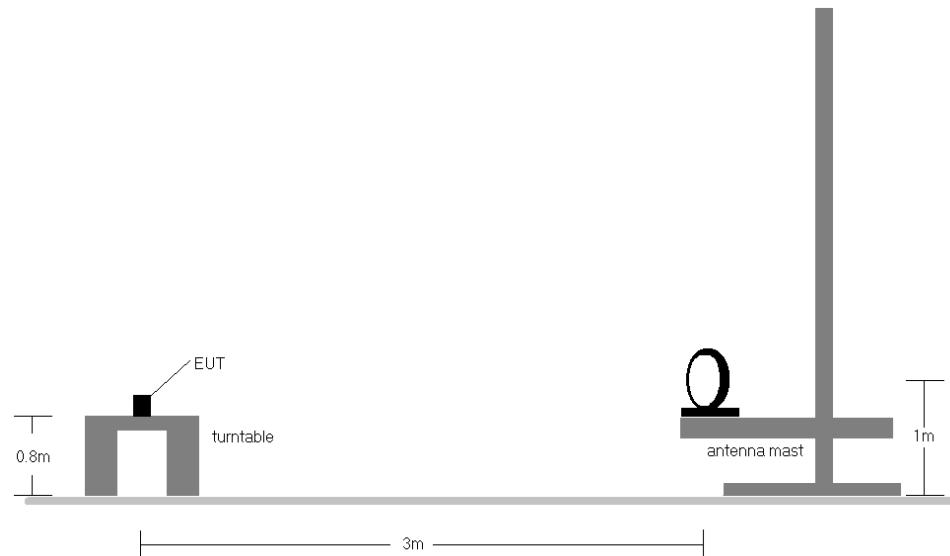

**Figure 7-7. Radiated Test Setup < 30Mhz**

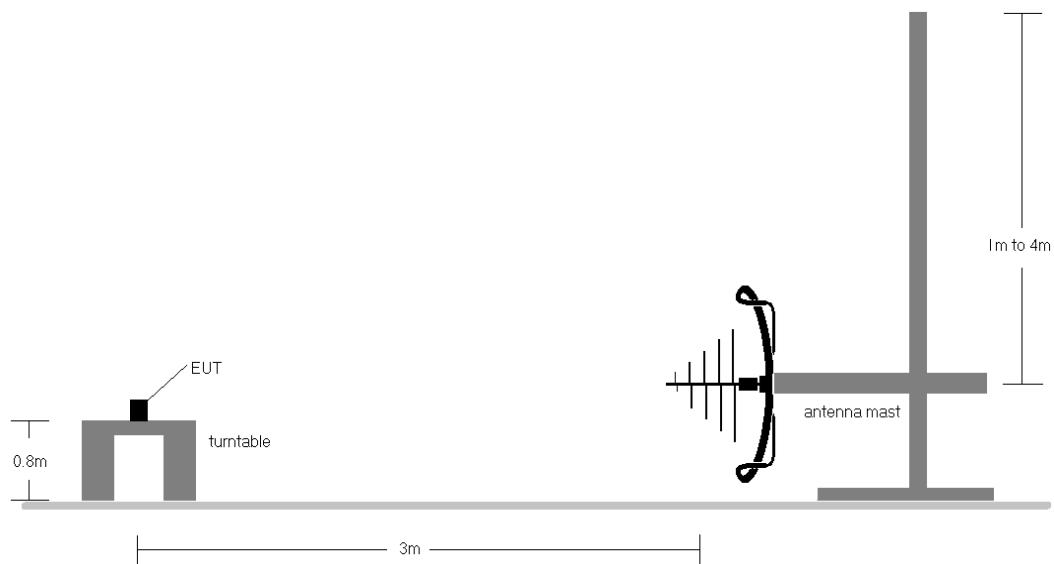

**Figure 7-8. Radiated Test Setup < 1GHz**

FCC ID: BCGA2588 IC: 579C-A2588	 <b>PCTEST</b> Proud to be part of 	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	Approved by: Technical Manager
Test Report S/N: 1C2111150078-01.BCG	Test Dates: 12/02/2021 - 02/04/2022	EUT Type: Tablet Device	Page 433 of 443

## Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen(8.10) are below the limit shown in Table 7-66.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. Both configurations below were investigated, and the worst case has been reported.
  - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
  - b. EUT powered by host PC via USB-C cable with wire charger
9. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
10. The unit was tested with all possible modes and only the highest emission is reported.
11. All antenna configurations were investigated and only the worst case is reported.

## Sample Calculations


### Determining Spurious Emissions Levels

- Field Strength Level  $[\text{dB}_{\mu\text{V/m}}]$  = Analyzer Level  $[\text{dBm}] + 107 + \text{AFCL} [\text{dB/m}]$
- AFCL  $[\text{dB/m}]$  = Antenna Factor  $[\text{dB/m}] + \text{Cable Loss} [\text{dB}] - \text{Preamplifier Gain} [\text{dB}]$
- Margin  $[\text{dB}]$  = Field Strength Level  $[\text{dB}_{\mu\text{V/m}}] - \text{Limit} [\text{dB}_{\mu\text{V/m}}]$

FCC ID: BCGA2588 IC: 579C-A2588	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2111150078-01.BCG	Test Dates: 12/02/2021 - 02/04/2022	EUT Type: Tablet Device	Page 434 of 443

## CDD Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

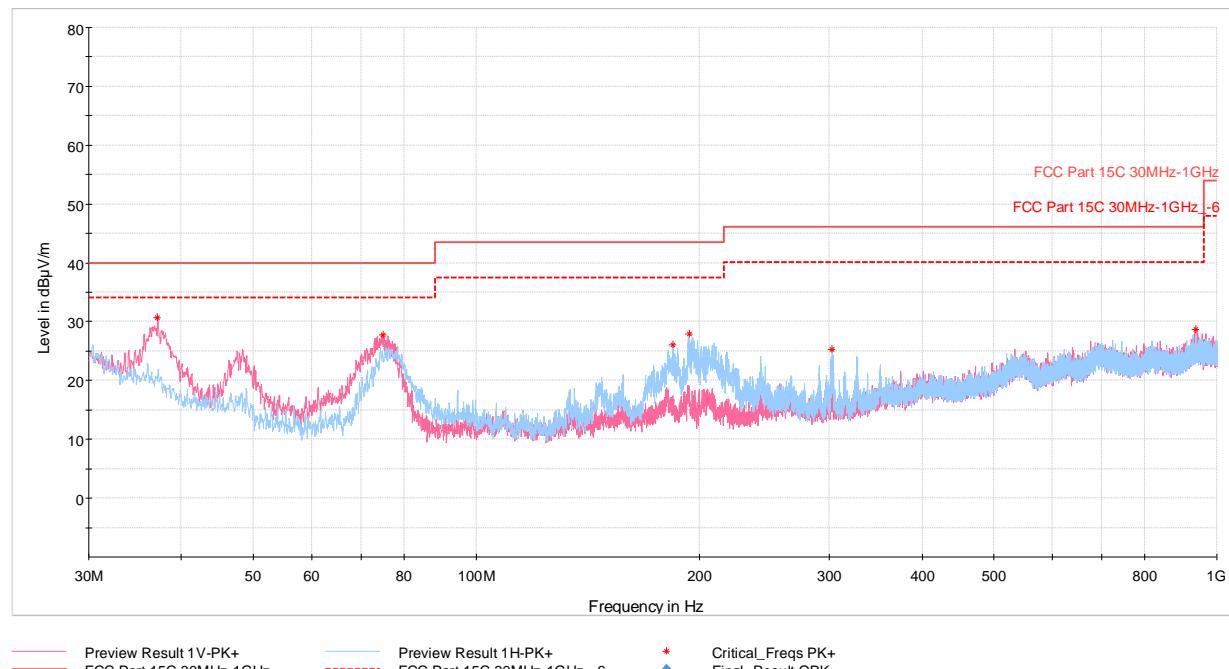


**Plot 7-734. Radiated Spurious Emissions below 1GHz CDD 11n Ch.6, with AC/DC Adapter**

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
37.18	Max Peak	V	100	56	-61.38	-14.99	30.63	40.00	-9.37
74.91	Max Peak	V	100	7	-58.88	-20.37	27.75	40.00	-12.25
184.23	Max Peak	H	200	314	-64.93	-15.97	26.10	43.52	-17.42
193.83	Max Peak	H	100	293	-62.42	-16.74	27.84	43.52	-15.68
302.67	Max Peak	H	100	190	-69.27	-12.50	25.23	46.02	-20.79
936.08	Max Peak	V	200	38	-78.54	0.18	28.64	46.02	-17.38

**Table 7-67. Radiated Spurious Emissions below 1GHz CDD 11n Ch.6, with AC/DC Adapter**

FCC ID: BCGA2588 IC: 579C-A2588	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2111150078-01.BCG	Test Dates: 12/02/2021 - 02/04/2022	EUT Type: Tablet Device	Page 435 of 443

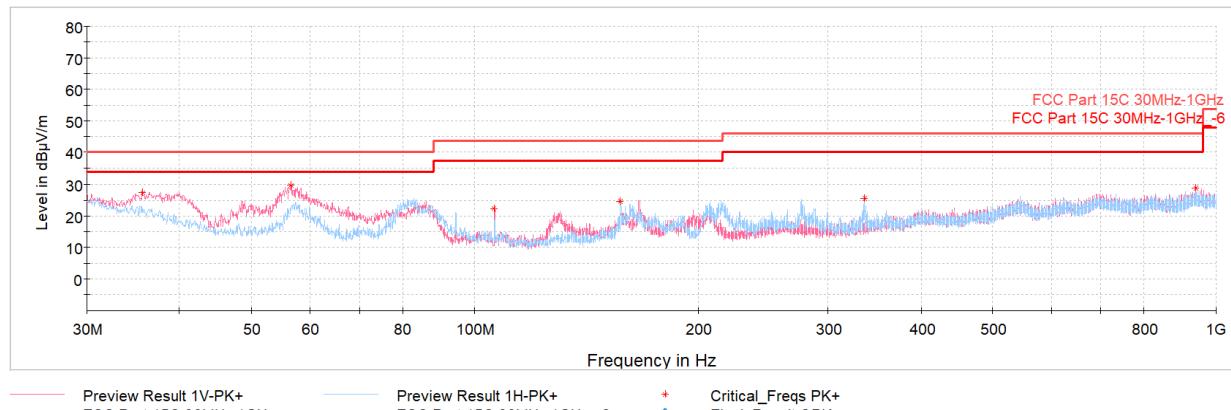

**Plot 7-735. Radiated Spurious Emissions below 1GHz CDD 11ax - SU Ch.6, with AC/DC Adapter**

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
35.67	Max Peak	V	100	244	-65.52	-14.20	27.28	40.00	-12.72
56.58	Max Peak	V	100	235	-56.34	-21.04	29.62	40.00	-10.38
106.39	Max Peak	V	200	254	-64.81	-19.95	22.24	43.52	-21.28
157.46	Max Peak	H	200	250	-67.03	-15.52	24.45	43.52	-19.07
335.45	Max Peak	H	100	127	-70.16	-11.48	25.36	46.02	-20.66
939.57	Max Peak	H	300	88	-78.42	0.13	28.71	46.02	-17.31

**Table 7-68. Radiated Spurious Emissions below 1GHz CDD 11ax - SU Ch.6, with AC/DC Adapter**

FCC ID: BCGA2588 IC: 579C-A2588	<b>PCTEST</b> Proud to be part of 			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2111150078-01.BCG	Test Dates: 12/02/2021 - 02/04/2022	EUT Type: Tablet Device			

## 7.9 AC Line-Conducted Emissions Measurement

§15.207; RSS-Gen [8.8]

### Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

***All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).***

Frequency of emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

**Table 7-69. Conducted Limits**

\*Decreases with the logarithm of the frequency.

### Test Procedures Used

ANSI C63.10-2013, Subclause 6.2

### Test Settings

#### Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


#### Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA2588 IC: 579C-A2588	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2111150078-01.BCG	Test Dates: 12/02/2021 - 02/04/2022	EUT Type: Tablet Device	Page 437 of 443

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

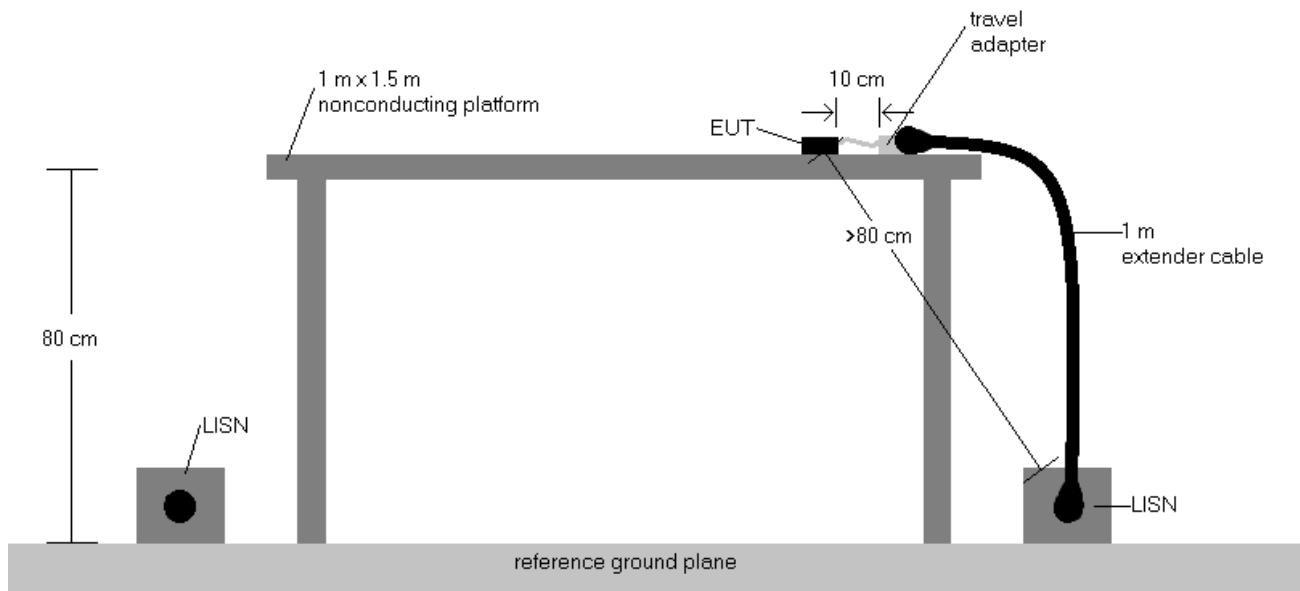


**Figure 7-9. Test Instrument & Measurement Setup**

## Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
  - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
  - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dB $\mu$ V) = QP/AV Analyzer/Receiver Level (dB $\mu$ V) + Corr. (dB)
6. Margin (dB) = QP/AV Level (dB $\mu$ V) - QP/AV Limit (dB $\mu$ V)
7. Traces shown in plot are made using quasi peak and average detectors.
8. Deviations to the Specifications: None.
9. The unit was tested with all possible modes and only the highest emission is reported.

FCC ID: BCGA2588 IC: 579C-A2588	<b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2111150078-01.BCG	Test Dates: 12/02/2021 - 02/04/2022	EUT Type: Tablet Device	Page 438 of 443

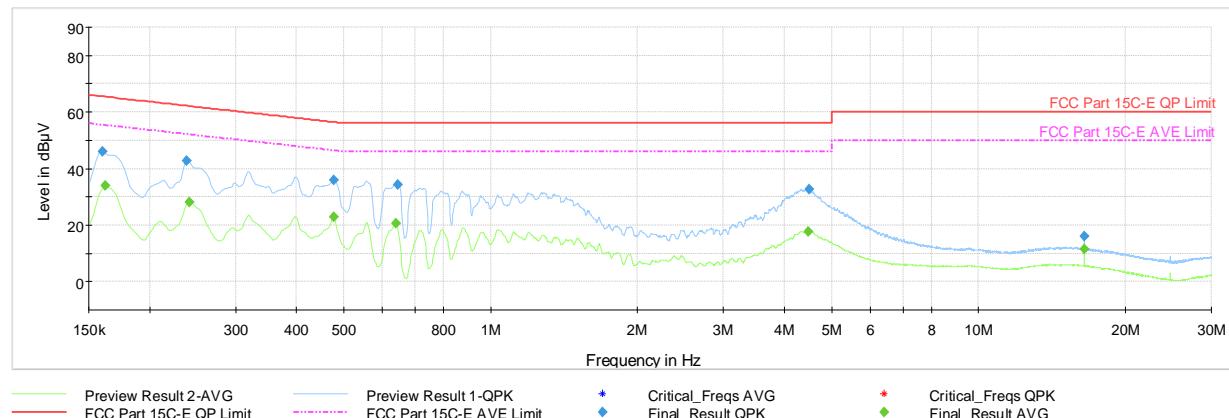


**Plot 7-736. AC Line Conducted Plot with CDD 11n Ch.6 (L1, with AC/DC Adapter)**

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.160	FINAL	46.1	—	65.48	-19.41	L1	GND
0.162	FINAL	—	33.87	55.36	-21.49	L1	GND
0.239	FINAL	42.9	—	62.15	-19.28	L1	GND
0.241	FINAL	—	28.15	52.07	-23.92	L1	GND
0.477	FINAL	36.0	—	56.39	-20.42	L1	GND
0.477	FINAL	—	22.77	46.39	-23.62	L1	GND
0.639	FINAL	—	20.59	46.00	-25.41	L1	GND
0.644	FINAL	34.2	—	56.00	-21.82	L1	GND
4.466	FINAL	—	17.60	46.00	-28.40	L1	GND
4.489	FINAL	32.5	—	56.00	-23.48	L1	GND
16.470	FINAL	—	11.52	50.00	-38.48	L1	GND
16.470	FINAL	16.1	—	60.00	-43.95	L1	GND

**Table 7-70. AC Line Conducted Data with CDD 11n Ch.6 (L1, with AC/DC Adapter)**

FCC ID: BCGA2588 IC: 579C-A2588	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Technical Manager
Test Report S/N: 1C2111150078-01.BCG	Test Dates: 12/02/2021 - 02/04/2022	EUT Type: Tablet Device	Page 439 of 443	

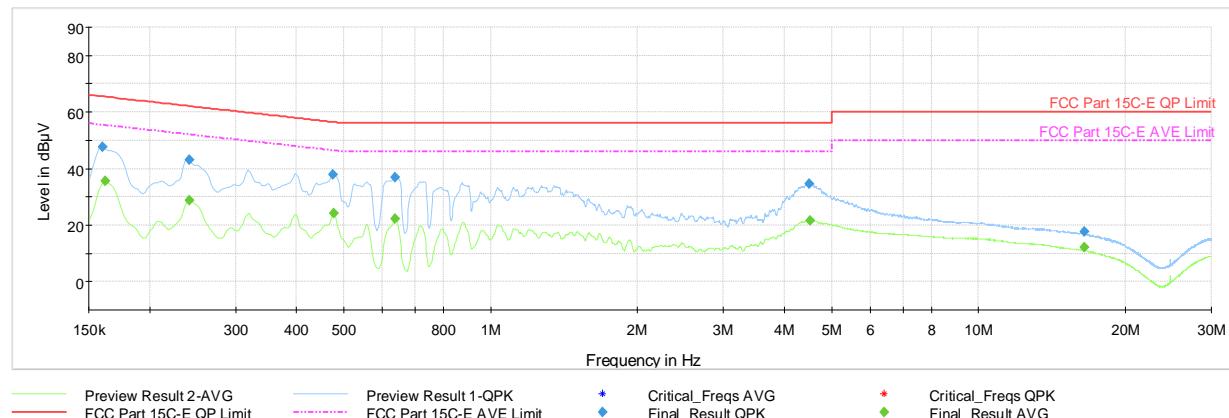


**Plot 7-737. AC Line Conducted Plot with CDD 11n Ch.6 (N, with AC/DC Adapter)**

Frequency [MHz]	Process State	QuasiPeak [dB $\mu$ V]	Average [dB $\mu$ V]	Limit [dB $\mu$ V]	Margin [dB]	Line	PE
0.160	FINAL	47.7	—	65.48	-17.79	N	GND
0.162	FINAL	—	35.57	55.36	-19.79	N	GND
0.241	FINAL	—	28.90	52.07	-23.17	N	GND
0.241	FINAL	43.1	—	62.07	-18.97	N	GND
0.475	FINAL	37.8	—	56.43	-18.59	N	GND
0.477	FINAL	—	24.33	46.39	-22.06	N	GND
0.637	FINAL	36.8	—	56.00	-19.21	N	GND
0.637	FINAL	—	22.28	46.00	-23.72	N	GND
4.491	FINAL	34.6	—	56.00	-21.41	N	GND
4.505	FINAL	—	21.51	46.00	-24.49	N	GND
16.479	FINAL	17.5	—	60.00	-42.47	N	GND
16.481	FINAL	—	12.10	50.00	-37.91	N	GND

**Table 7-71. AC Line Conducted Data with CDD 11n Ch.6 (N, with AC/DC Adapter)**

FCC ID: BCGA2588 IC: 579C-A2588	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2111150078-01.BCG	Test Dates: 12/02/2021 - 02/04/2022	EUT Type: Tablet Device	Page 440 of 443

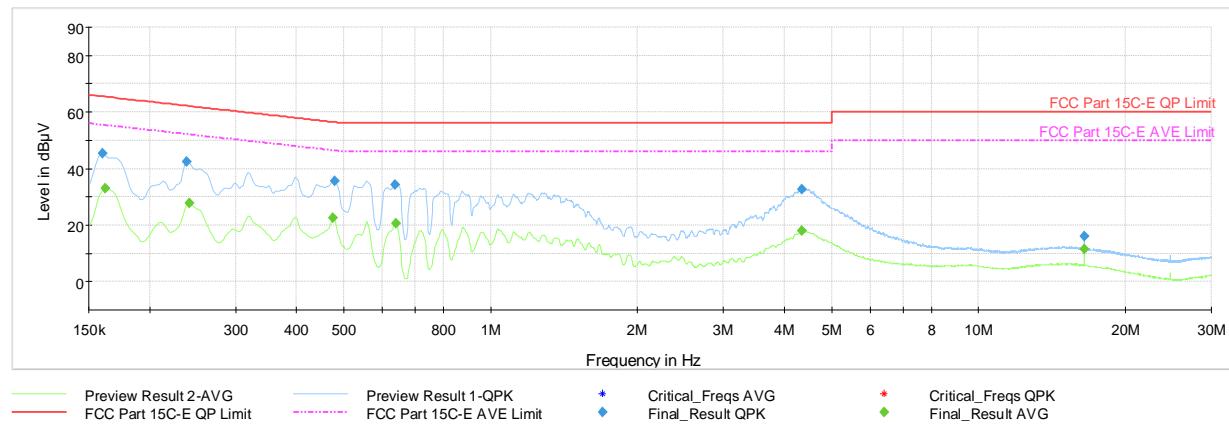


**Plot 7-738. AC Line Conducted Plot with CDD 11ax - SU Ch.6 (L1, with AC/DC Adapter)**

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.160	FINAL	45.3	—	65.48	-20.19	L1	GND
0.162	FINAL	—	33.07	55.36	-22.29	L1	GND
0.239	FINAL	42.5	—	62.15	-19.64	L1	GND
0.241	FINAL	—	27.74	52.07	-24.33	L1	GND
0.475	FINAL	—	22.71	46.43	-23.72	L1	GND
0.479	FINAL	35.6	—	56.35	-20.80	L1	GND
0.637	FINAL	34.3	—	56.00	-21.74	L1	GND
0.639	FINAL	—	20.67	46.00	-25.33	L1	GND
4.334	FINAL	32.6	—	56.00	-23.36	L1	GND
4.334	FINAL	—	17.89	46.00	-28.11	L1	GND
16.468	FINAL	—	11.52	50.00	-38.48	L1	GND
16.468	FINAL	16.1	—	60.00	-43.88	L1	GND

**Table 7-72. AC Line Conducted Data with CDD 11ax - SU Ch.6 (L1, with AC/DC Adapter)**

FCC ID: BCGA2588 IC: 579C-A2588	 <b>PCTEST®</b> Proud to be part of  <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Technical Manager
Test Report S/N: 1C2111150078-01.BCG	Test Dates: 12/02/2021 - 02/04/2022	EUT Type: Tablet Device	Page 441 of 443	

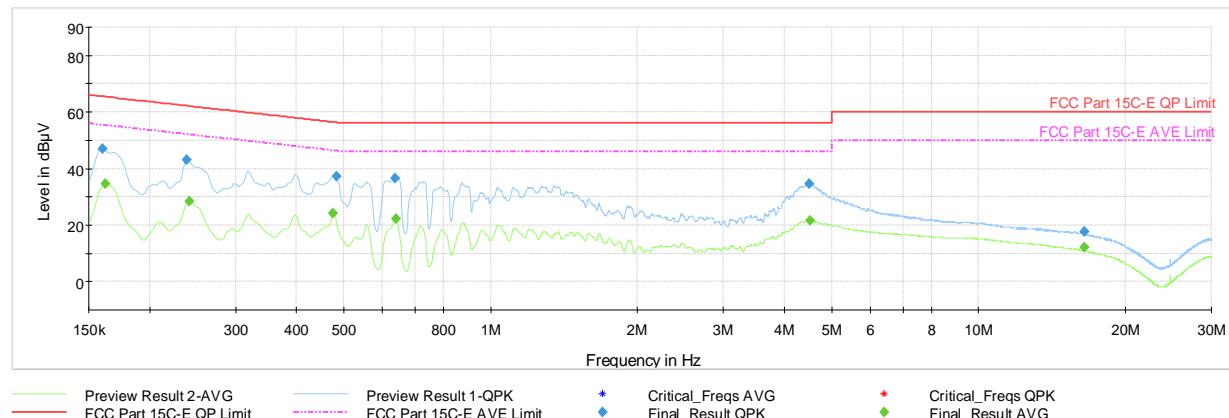

**Plot 7-739. AC Line Conducted Plot with CDD 11ax - SU Ch.6 (N, with AC/DC Adapter)**

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.160	FINAL	47.0	—	65.48	-18.53	N	GND
0.162	FINAL	—	34.76	55.36	-20.60	N	GND
0.239	FINAL	43.0	—	62.15	-19.13	N	GND
0.241	FINAL	—	28.33	52.07	-23.74	N	GND
0.475	FINAL	—	24.08	46.43	-22.35	N	GND
0.484	FINAL	37.1	—	56.27	-19.15	N	GND
0.637	FINAL	36.7	—	56.00	-19.29	N	GND
0.639	FINAL	—	22.11	46.00	-23.89	N	GND
4.493	FINAL	34.5	—	56.00	-21.49	N	GND
4.509	FINAL	—	21.45	46.00	-24.55	N	GND
16.479	FINAL	17.6	—	60.00	-42.40	N	GND
16.481	FINAL	—	12.08	50.00	-37.92	N	GND

**Table 7-73. AC Line Conducted Data with CDD 11ax - SU Ch.6 (N, with AC/DC Adapter)**

FCC ID: BCGA2588 IC: 579C-A2588	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2111150078-01.BCG	Test Dates: 12/02/2021 - 02/04/2022	EUT Type: Tablet Device	Page 442 of 443

## 8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device**

**FCC ID: BCGA2588, IC: 579C-A2588** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA2588 IC: 579C-A2588	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2111150078-01.BCG	Test Dates: 12/02/2021 - 02/04/2022	EUT Type: Tablet Device	Page 443 of 443