




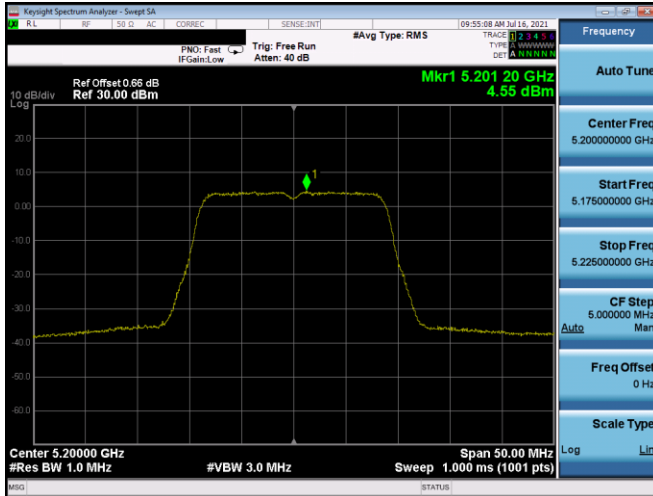


Plot 7-55. PSD CDD Antenna A (20MHz BW 802.11n - Ch. 40, MCS15)

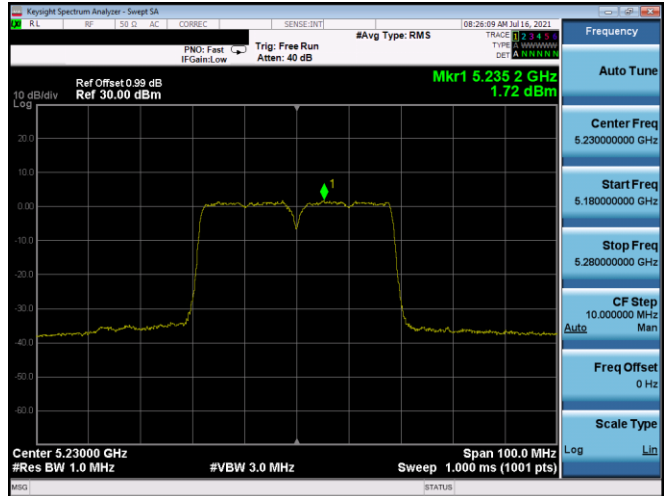


Plot 7-58. PSD CDD Antenna B (40MHz BW 802.11n - Ch. 46, MCS15)

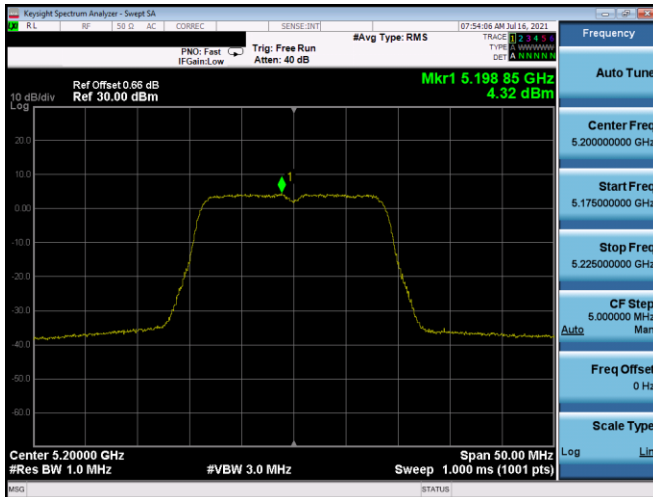


Plot 7-56. PSD CDD Antenna B (20MHz BW 802.11n - Ch. 40, MCS15)

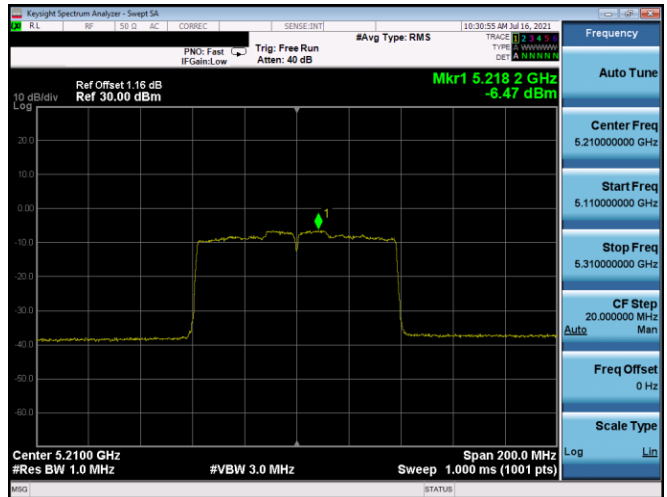

Plot 7-59. PSD CDD Antenna A (80MHz BW 802.11ac - Ch. 42, MCS9)

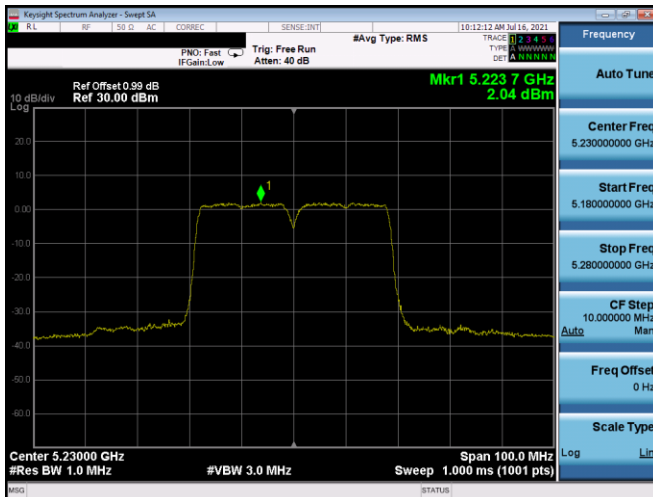


Plot 7-57. PSD CDD Antenna A (40MHz BW 802.11n - Ch. 46, MCS15)

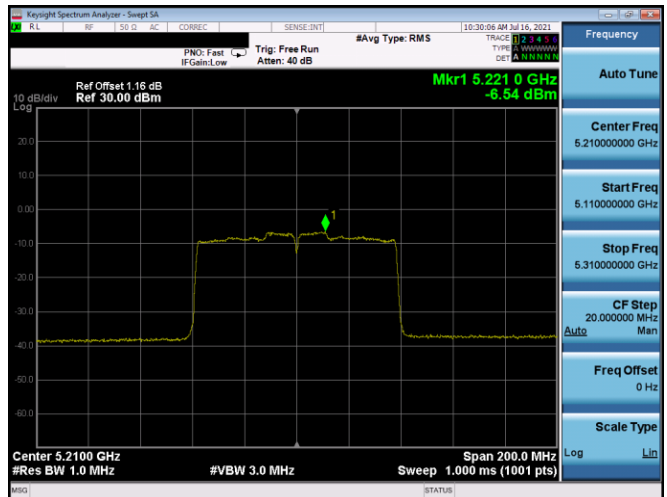


Plot 7-60. PSD CDD Antenna B (80MHz BW 802.11ac - Ch. 42, MCS9)


FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 - 08/03/2021	EUT Type: Tablet Device	Page 51 of 156

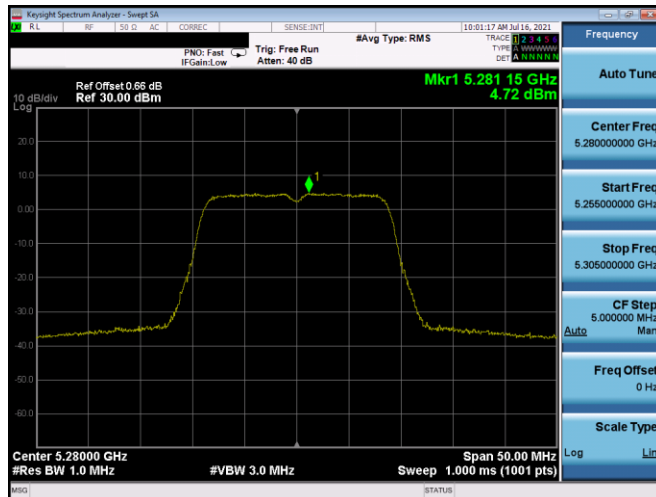


Plot 7-61. PSD SDM Antenna A (20MHz BW 802.11n - Ch. 56, MCS15)

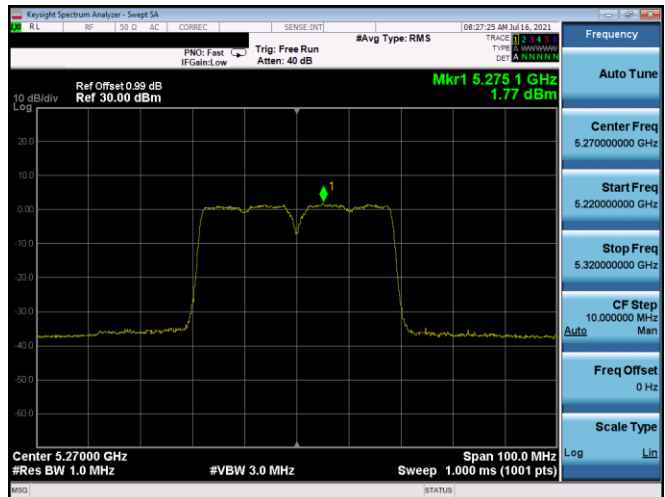


Plot 7-64. PSD CDD Antenna B (40MHz BW 802.11n - Ch. 54, MCS15)

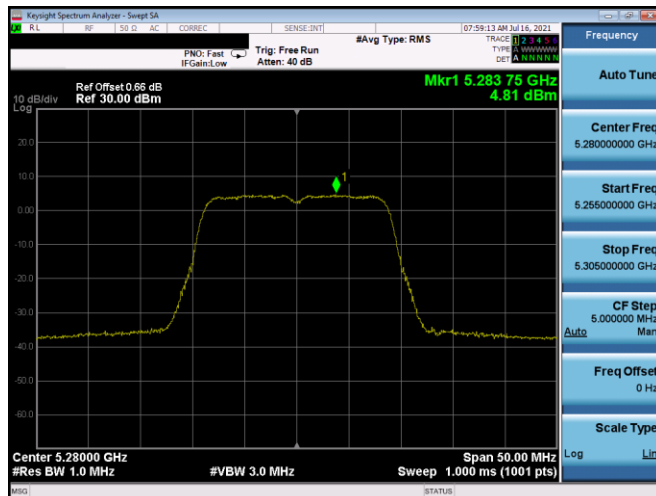


Plot 7-62. PSD SDM Antenna B (20MHz BW 802.11n - Ch. 56, MCS15)

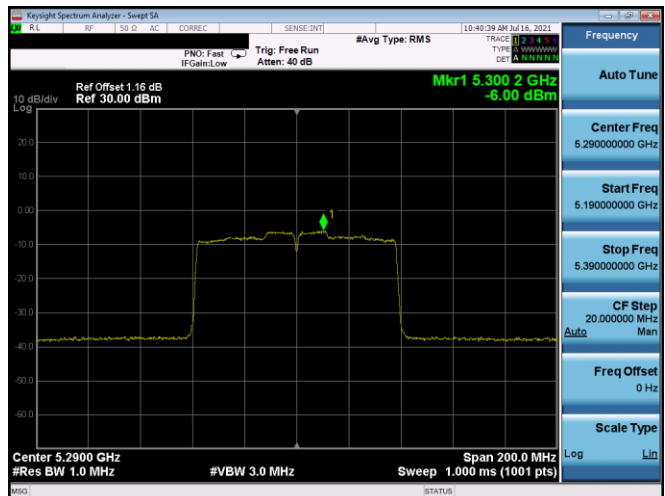

Plot 7-65. PSD CDD Antenna A (80MHz BW 802.11ac - Ch. 58, MCS9)

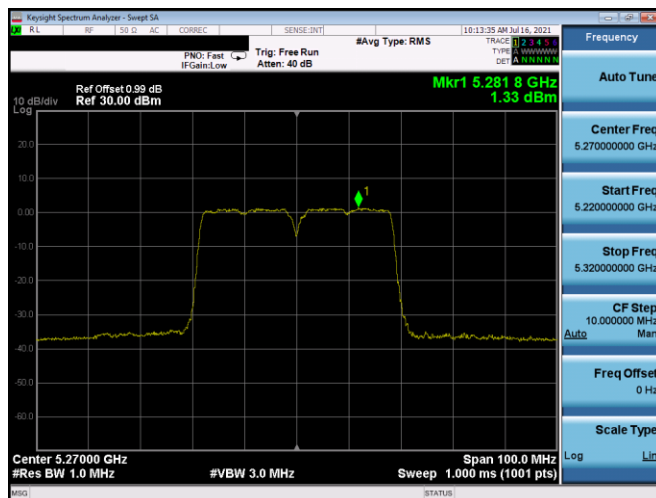


Plot 7-63. PSD CDD Antenna A (40MHz BW 802.11n - Ch. 54, MCS15)

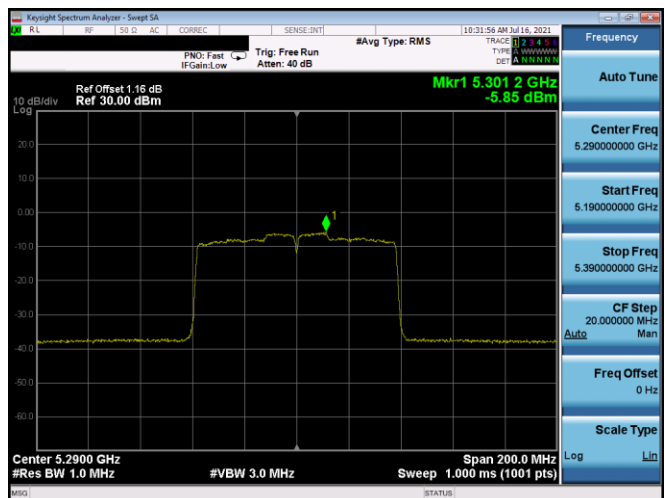


Plot 7-66. PSD CDD Antenna B (80MHz BW 802.11n - Ch. 58, MCS9)


FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 - 08/03/2021	EUT Type: Tablet Device	Page 52 of 156

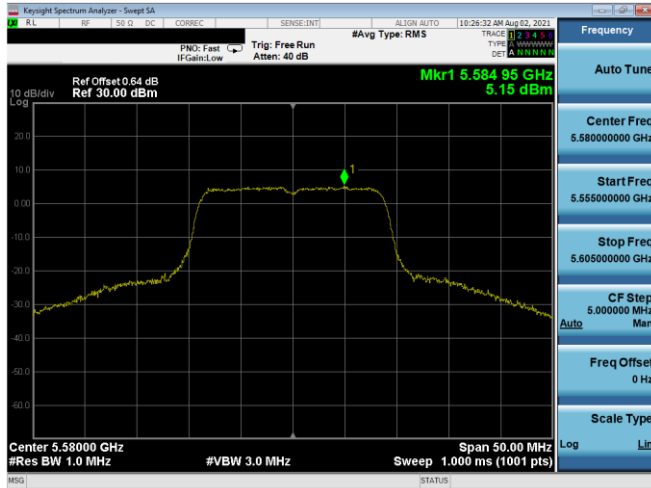


Plot 7-67. PSD SDM Antenna A (20MHz BW 802.11n - Ch. 116, MCS15)

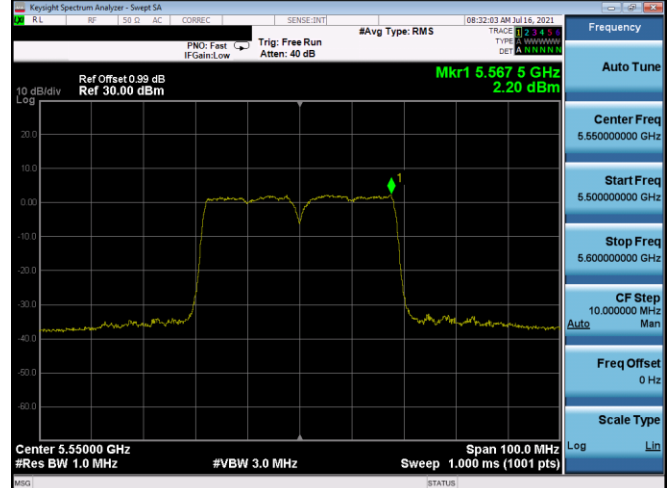


Plot 7-70. PSD CDD Antenna B (40MHz BW 802.11n - Ch. 110, MCS15)

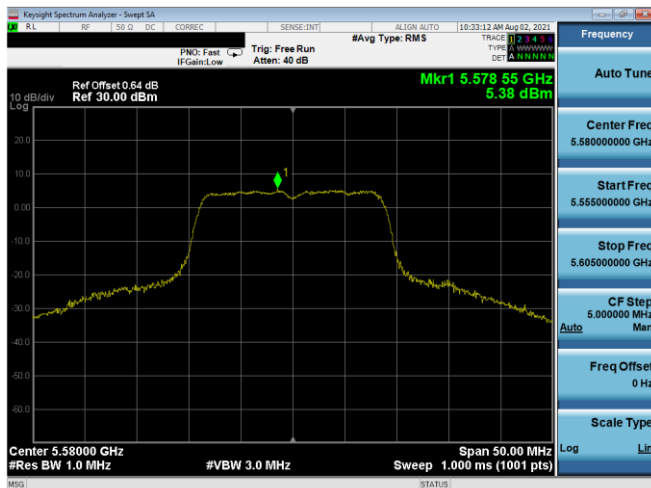


Plot 7-68. PSD SDM Antenna B (20MHz BW 802.11n - Ch. 116, MCS15)

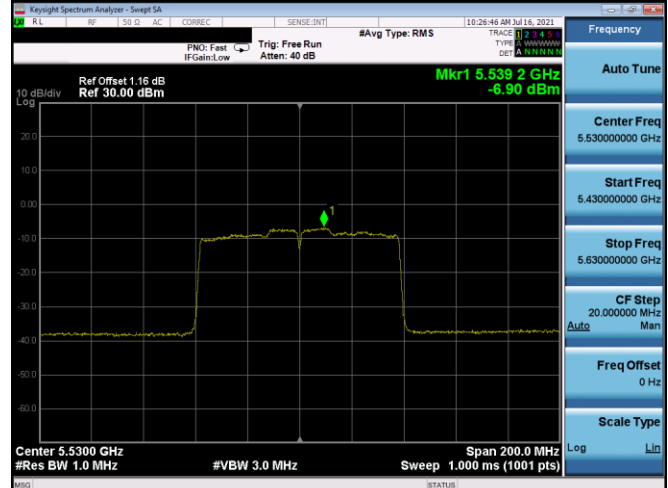

Plot 7-71. PSD CDD Antenna A (80MHz BW 802.11ac - Ch. 106, MCS9)

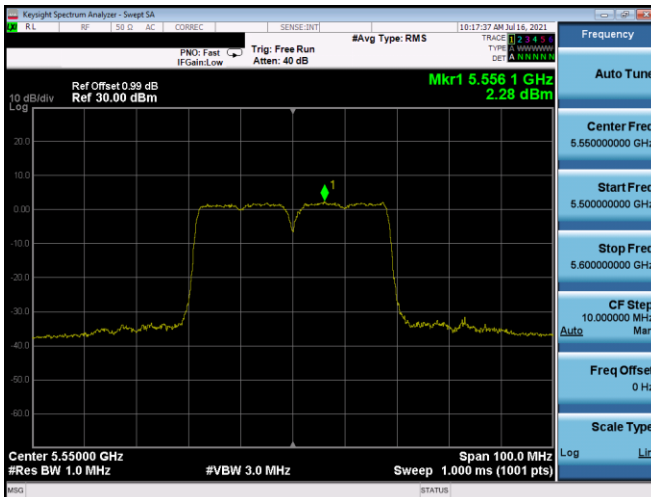

Plot 7-69. PSD CDD Antenna A (40MHz BW 802.11n - Ch. 110, MCS15)

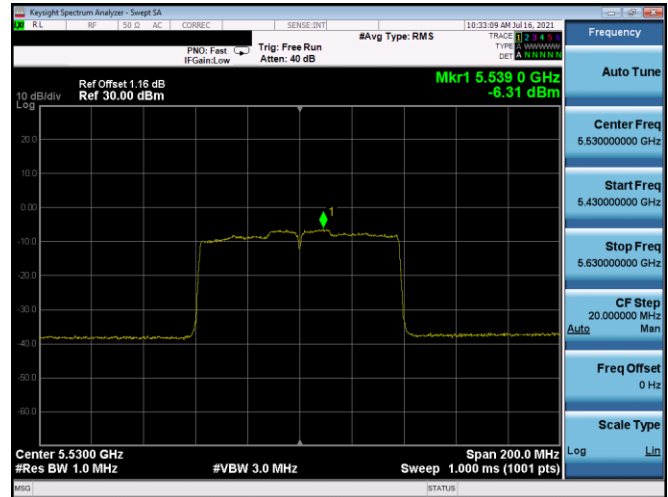


Plot 7-72. PSD CDD Antenna B (80MHz BW 802.11ac - Ch. 106, MCS9)

FCC ID: BCGA2603 IC: 579C-A2603		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG			Page 53 of 156
Test Dates: 05/28/2021 - 08/03/2021	EUT Type: Tablet Device		


	Frequency [MHz]	Channel No.	802.11 Mode	Mode	Data Rate [Mbps]	Antenna A Power Density [dBm/500kHz]	Antenna B Power Density [dBm/500kHz]	Summed Power Density [dBm/500kHz]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]
Band 3	5745	149	n (20MHz)	CDD	130/144.4 (MCS15)	1.45	1.32	4.40	29.6	-25.22
	5785	157	n (20MHz)	CDD	130/144.4 (MCS15)	2.21	2.34	5.28	29.6	-24.33
	5825	165	n (20MHz)	CDD	130/144.4 (MCS15)	1.58	1.63	4.62	29.6	-25.00
	5755	151	n (40MHz)	CDD	270/300 (MCS15)	0.01	0.08	3.05	29.6	-26.56
	5795	159	n (40MHz)	CDD	270/300 (MCS15)	-1.33	-0.98	1.86	29.6	-27.75
	5775	155	ac (80MHz)	CDD	780/866.7 (MCS9)	-5.51	-5.51	-2.50	29.6	-32.11

Table 7-33. Band 3 Power Spectral Density Measurements CDD


FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 54 of 156

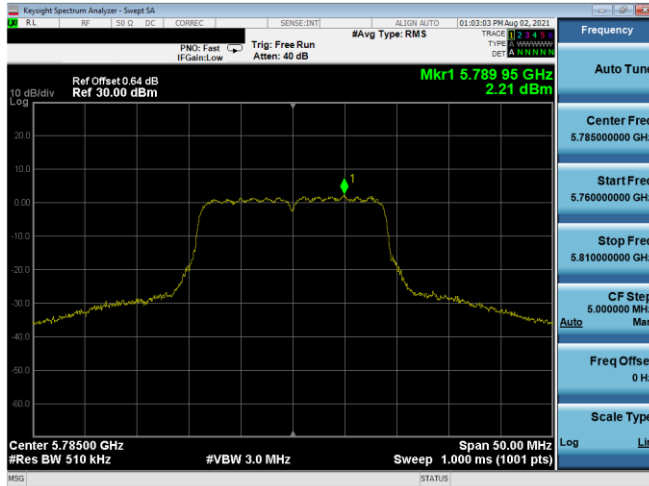


Plot 7-73. PSD CDD Antenna A (20MHz BW 802.11n - Ch. 157, MCS15)

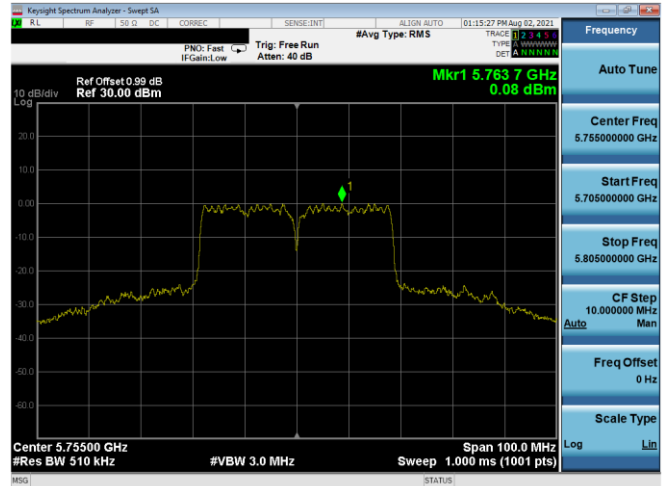


Plot 7-76. PSD CDD Antenna B (40MHz BW 802.11n - Ch. 151, MCS15)

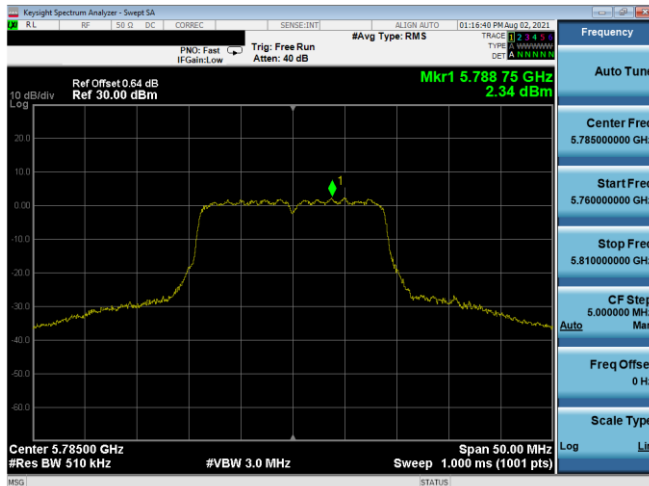


Plot 7-74. PSD CDD Antenna B (20MHz BW 802.11n - Ch. 157, MCS15)

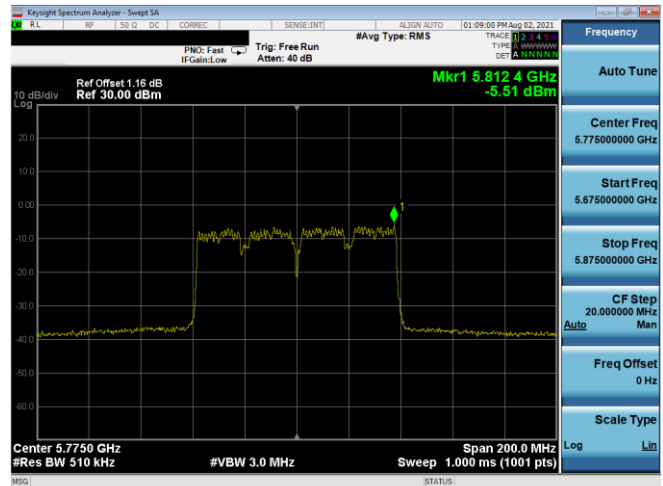

Plot 7-77. PSD CDD Antenna A (80MHz BW 802.11ac - Ch. 155, MCS9)

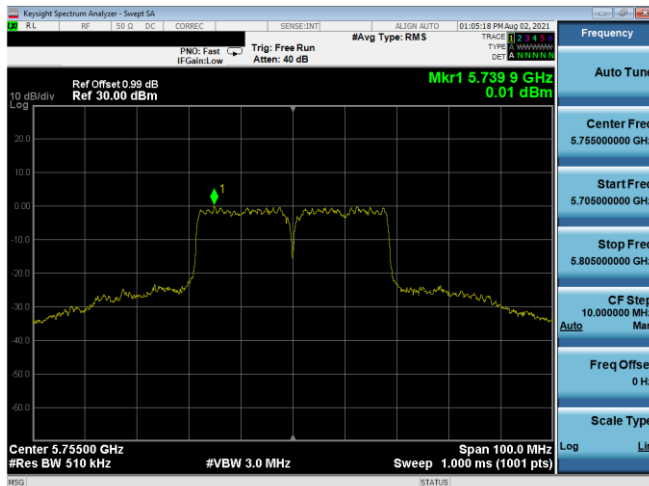

Plot 7-75. PSD CDD Antenna A (40MHz BW 802.11n - Ch. 151, MCS15)

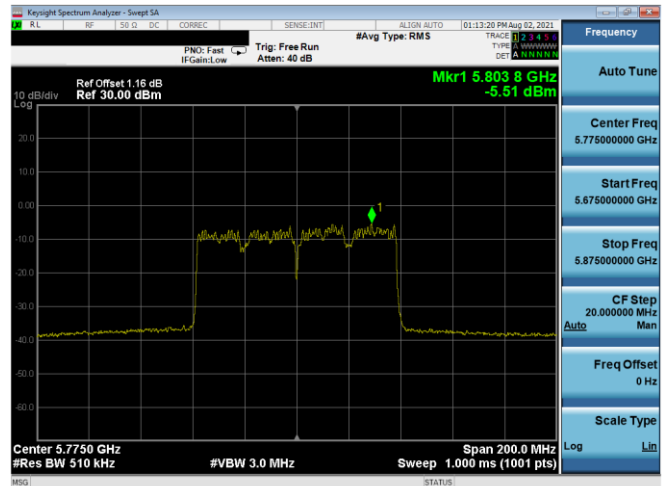


Plot 7-78. PSD CDD Antenna B (80MHz BW 802.11ac - Ch. 155, MCS9)

FCC ID: BCGA2603 IC: 579C-A2603		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 - 08/03/2021	EUT Type: Tablet Device	Page 55 of 156


	Frequency [MHz]	Channel No.	802.11 Mode	Mode	Data Rate [Mbps]	Antenna A Power Density [dBm/MHz]	Antenna B Power Density [dBm/MHz]	Summed Power Density [dBm/MHz]	Directional Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	ISED Max e.i.r.p. Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	n (20MHz)	CDD	130/144.4 (MCS15)	1.42	1.04	4.24	4.99	9.23	10.0	-0.77
	5200	40	n (20MHz)	CDD	130/144.4 (MCS15)	1.63	1.38	4.52	4.99	9.51	10.0	-0.49
	5240	48	n (20MHz)	CDD	130/144.4 (MCS15)	0.23	1.58	3.97	4.99	8.96	10.0	-1.04
	5190	38	n (40MHz)	CDD	270/300 (MCS15)	-2.87	-3.12	0.02	4.99	5.01	10.0	-4.99
	5230	46	n (40MHz)	CDD	270/300 (MCS15)	0.93	1.31	4.13	4.99	9.13	10.0	-0.87
	5210	42	ac (80MHz)	CDD	780/866.7 (MCS9)	-6.47	-6.54	-3.49	4.99	1.50	10.0	-8.50

Table 7-34. ISED Band 1 e.i.r.p. Power Spectral Density Measurements CDD


FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 56 of 156

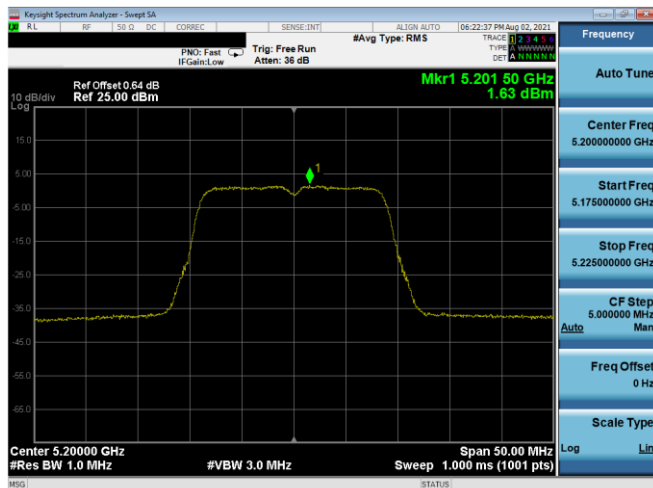


Plot 7-79. ISED PSD CDD Antenna A (20MHz BW 11n - Ch.40, MCS15)

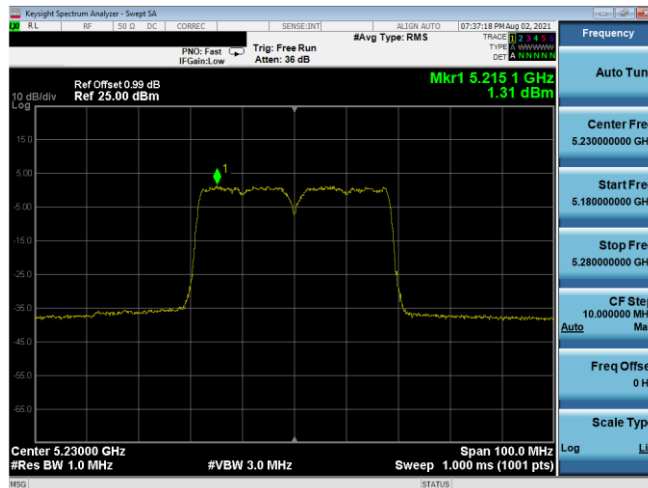


Plot 7-82. ISED PSD CDD Antenna B (40MHz BW 11n - Ch.46, MCS15)

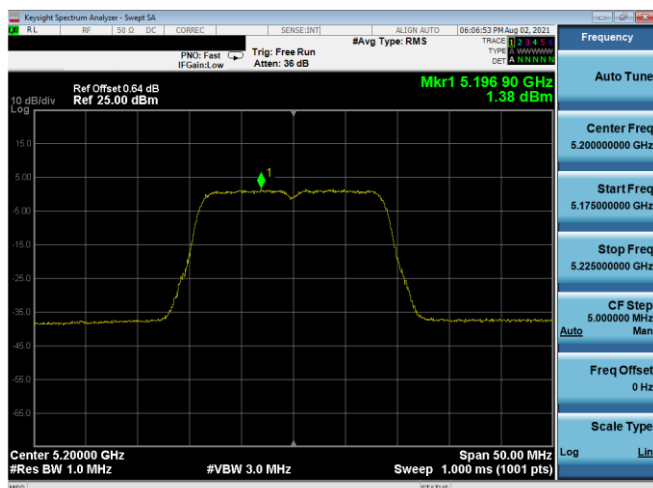


Plot 7-80. ISED PSD CDD Antenna B (20MHz BW 11n - Ch.40, MCS15)

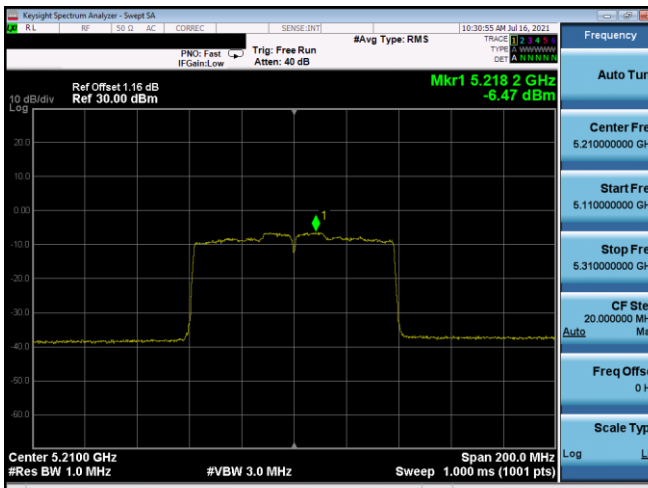

Plot 7-83. FCC PSD CDD Antenna A (80MHz BW 11ac - Ch.42, MCS15)

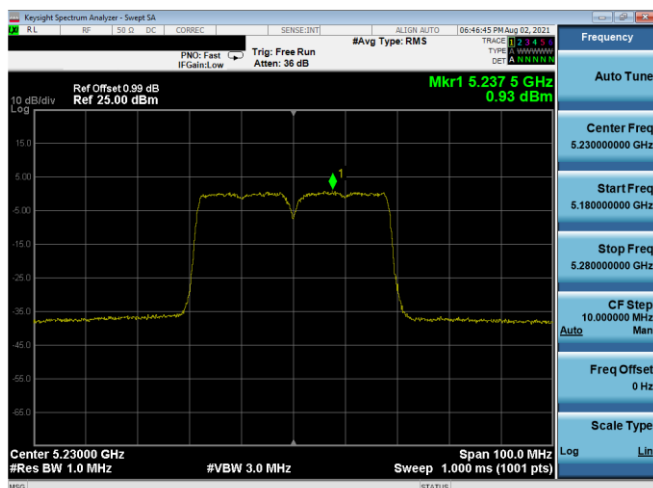

Plot 7-81. ISED PSD CDD Antenna A (40MHz BW 11n - Ch.46, MCS15)

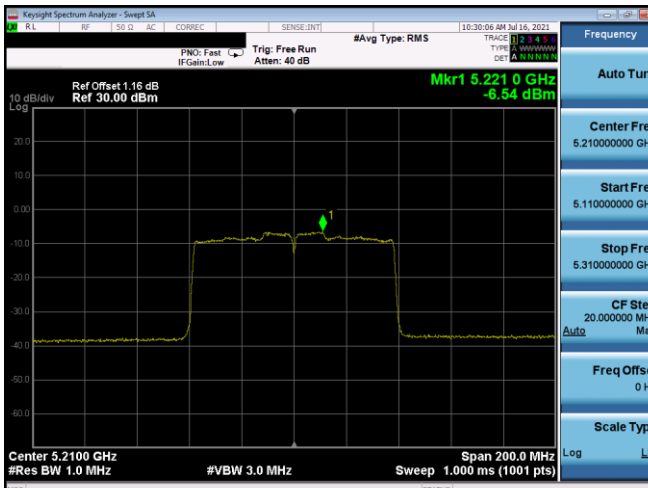

Plot 7-84. FCC PSD CDD Antenna B (80MHz BW 11ac - Ch.42, MCS15)

FCC ID: BCGA2603 IC: 579C-A2603		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 - 08/03/2021	EUT Type: Tablet Device	Page 57 of 156

Note:

Per ANSI C63.10-2013 Section 14.3.2.2 and KDB 662911 v02r01 Section E)2), the power spectral density at Antenna A and Antenna B were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample Directional Gain Calculation:

For correlated signals, assuming the antenna gain is 1.27 dBi for Antenna A and 2.64 dBi for Antenna B.

$$\begin{aligned}\text{Directional gain} &= 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{\text{ANT}}] \text{ dBi} \\ &= 10 \log[(10^{1.27/20} + 10^{2.64/20} / 2] \text{ dBi} \\ &= 4.99 \text{ dBi}\end{aligned}$$

For uncorrelated signals, assuming the antenna gain is 1.27 dBi for Antenna A and 2.64 dBi for Antenna B.

$$\begin{aligned}\text{Directional gain} &= 10 \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10}) / N_{\text{ANT}}] \text{ dBi} \\ &= 10 \log[(10^{1.27/10} + 10^{2.64/10} / 2] \text{ dBi} \\ &= 7.03 \text{ dBi}\end{aligned}$$

Sample CDD/SDM Calculation:

At 5180MHz in 802.11n (20MHz BW) mode, the average conducted power spectral density was measured to be 3.13 dBm for Antenna B and 2.91 dBm for Antenna B.

$$\text{Antenna A} + \text{Antenna B} = \text{CDD/SDM}$$

$$(3.13 \text{ dBm} + 2.91 \text{ dBm}) = (2.05 \text{ mW} + 1.95 \text{ mW}) = 4.01 \text{ mW} = 6.03 \text{ dBm}$$

Sample e.i.r.p Power Spectral Density Calculation:

At 5180MHz in 802.11n (20MHz BW) mode, the average CDD/SDM power density was calculated to be 6.03 dBm with directional gain of 4.99 dBi.

$$\text{e.i.r.p. Power Spectral Density(dBm)} = \text{Power Spectral Density (dBm)} + \text{Ant gain (dBi)}$$

$$6.03 \text{ dBm} + 4.99 \text{ dBi} = 8.55 \text{ dBm}$$

FCC ID: BCGA2603 IC: 579C-A2603		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 58 of 156

7.6 Radiated Spurious Emissions – Above 1GHz

§15.407(b) §15.205 §15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11n (20MHz BW), 802.11n (40MHz BW), and 802.11ac (80MHz), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating in the 5.15-5.25 GHz and 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-35 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-35. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Sections 12.7.7.2, 12.7.6, 12.7.5
 KDB 789033 D02 v02r01 – Section G

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 59 of 156

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

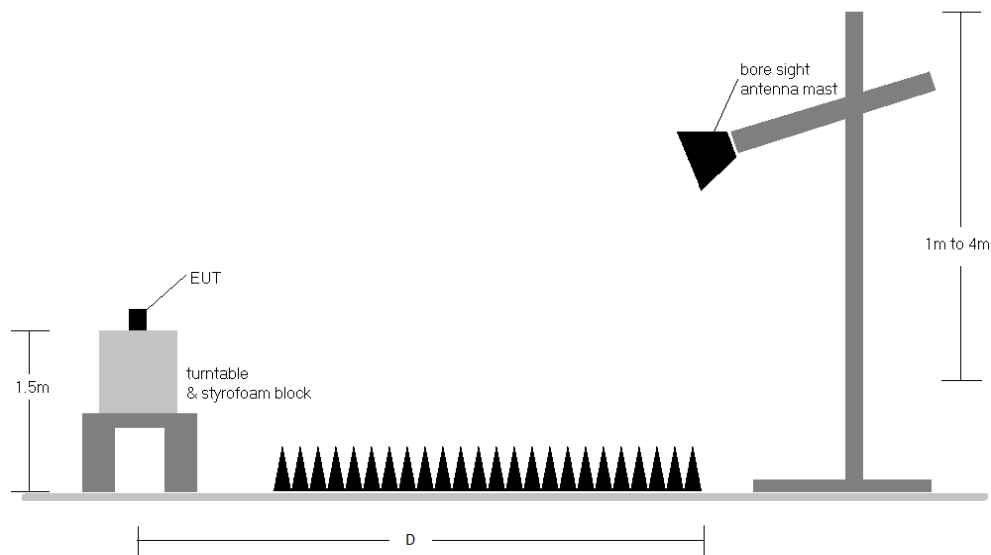


Figure 7-5. Test Instrument & Measurement Setup

FCC ID: BCGA2603 IC: 579C-A2603	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 60 of 156

Test Notes

1. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-35.
2. All spurious emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-35. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dBμV/m.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
6. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. All data rates were investigated and only the worse case is reported
9. The unit was tested with all possible modes and only the highest emission is reported.
10. The “-” shown in the following RSE tables are used to denote a noise floor measurement.

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level [dBμV/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] – Preamplifier Gain [dB]
- Margin [dB] = Field Strength Level [dBμV/m] – Limit [dBμV/m]

Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.6 was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 61 of 156

7.6.1 Antenna A Radiated Spurious Emission

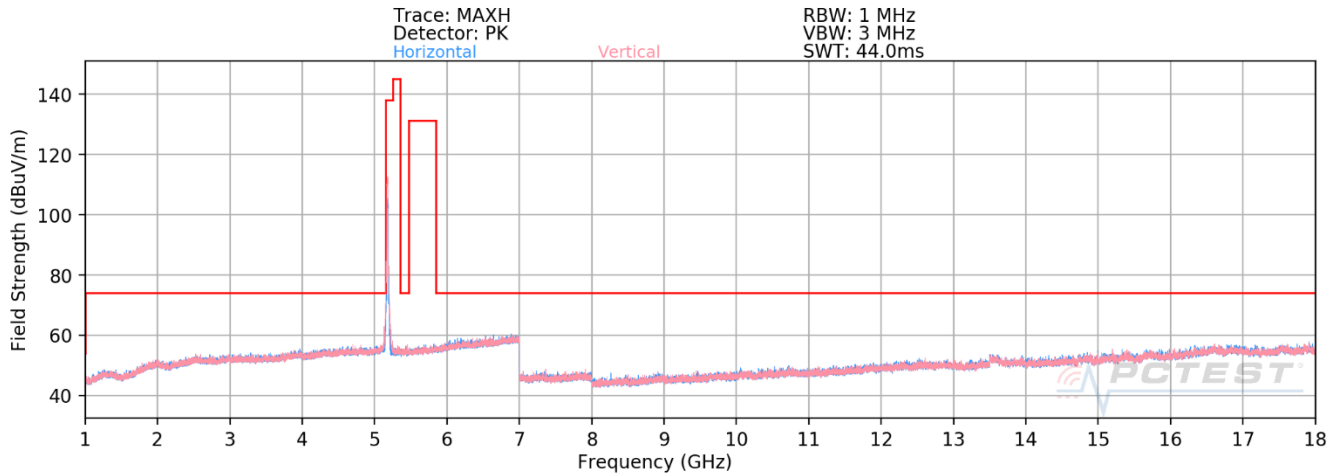


Plot 7-85. Radiated Spurious Emissions above 1GHz Antenna A (802.11n – Ch. 36)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5180MHz
Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	Peak	-	-	-	-72.19	15.41	50.22	68.20	-17.98
* 15540.00	Average	-	-	-	-81.30	20.26	45.96	53.98	-8.02
* 15540.00	Peak	-	-	-	-71.31	20.26	55.95	73.98	-18.03

Table 7-36. Radiated Measurements Antenna A

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 62 of 156

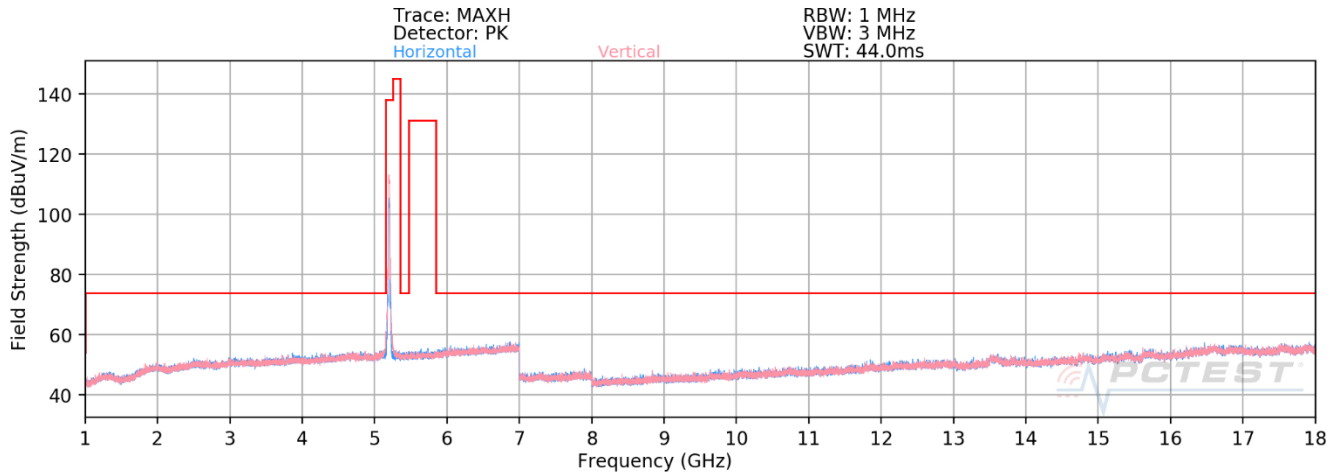


Plot 7-86. Radiated Spurious Emissions above 1GHz Antenna A (802.11n – Ch. 40)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5200MHz
Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	Peak	-	-	-	-70.77	15.59	51.82	68.20	-16.38
* 15600.00	Average	-	-	-	-81.22	20.26	46.04	53.98	-7.94
* 15600.00	Peak	-	-	-	-71.06	20.26	56.20	73.98	-17.78

Table 7-37. Radiated Measurements Antenna A

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 63 of 156

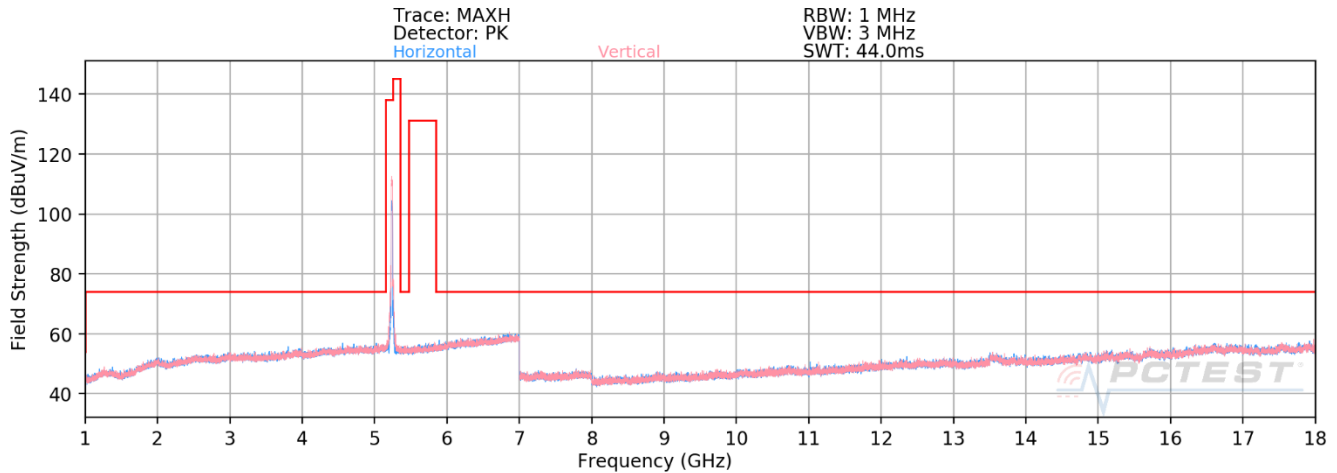


Plot 7-87. Radiated Spurious Emissions above 1GHz Antenna A (802.11n – Ch. 48)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5240MHz
Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	-	-	-	-71.07	15.32	51.25	68.20	-16.95
* 15720.00	Average	-	-	-	-81.17	21.24	47.07	53.98	-6.90
* 15720.00	Peak	-	-	-	-71.26	21.24	56.98	73.98	-16.99

Table 7-38. Radiated Measurements Antenna A

FCC ID: BCGA2603 IC: 579C-A2603		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 64 of 156

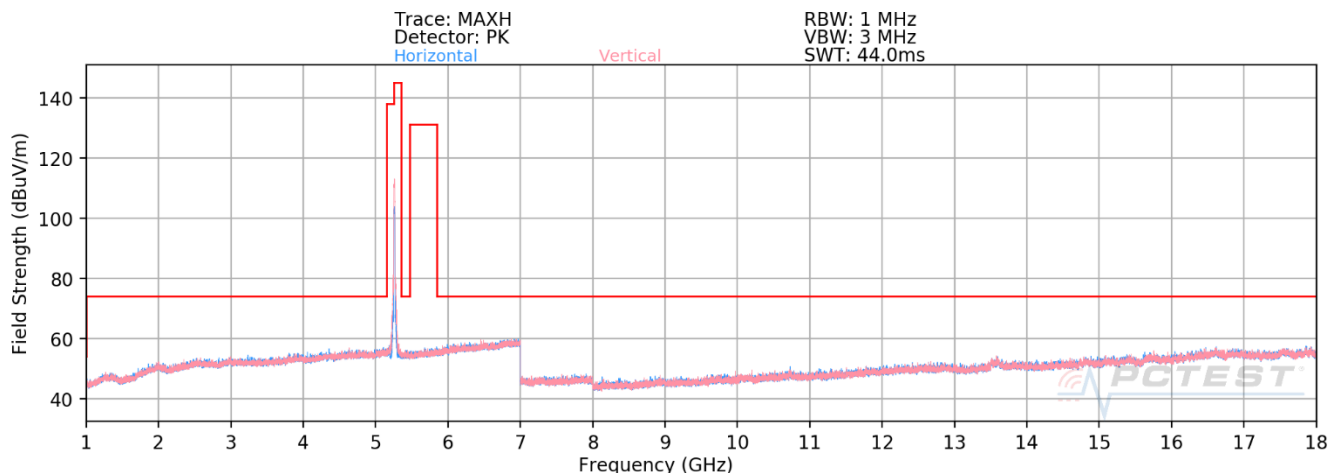


Plot 7-88. Radiated Spurious Emissions above 1GHz Antenna A (802.11n – Ch. 52)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5260MHz
Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	-	-	-	-71.30	15.10	50.80	68.20	-17.40
* 15780.00	Average	-	-	-	-81.06	20.23	46.17	53.98	-7.81
* 15780.00	Peak	-	-	-	-71.12	20.23	56.11	73.98	-17.87

Table 7-39. Radiated Measurements Antenna A

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 65 of 156

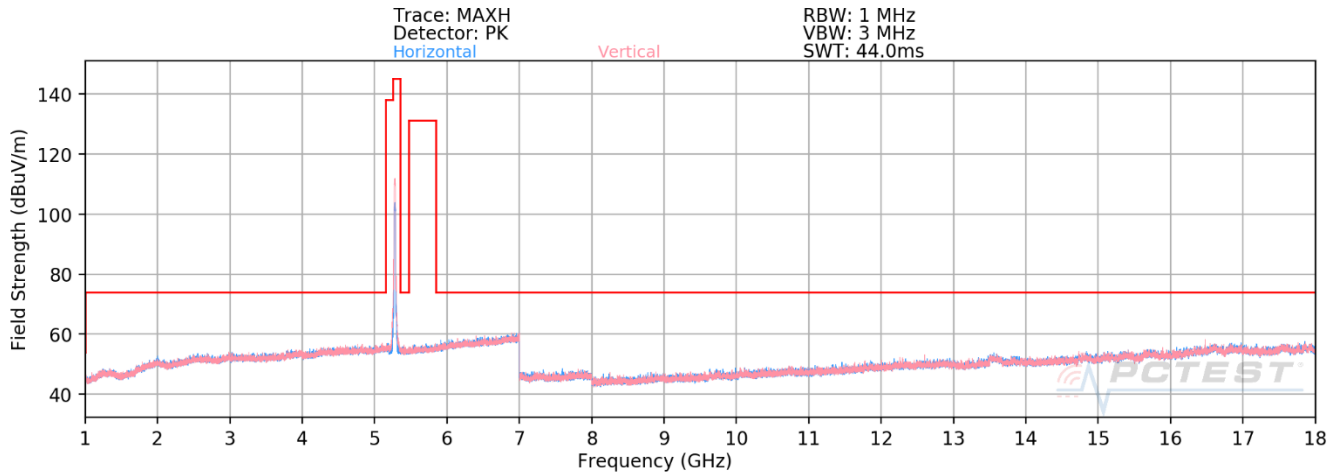


Plot 7-89. Radiated Spurious Emissions above 1GHz Antenna A (802.11n – Ch. 56)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5280MHz
Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	Peak	-	-	-	-72.14	15.47	50.33	68.20	-17.87
* 15840.00	Average	-	-	-	-80.76	20.34	46.58	53.98	-7.39
* 15840.00	Peak	-	-	-	-71.24	20.34	56.10	73.98	-17.87

Table 7-40. Radiated Measurements Antenna A

FCC ID: BCGA2603 IC: 579C-A2603		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 66 of 156

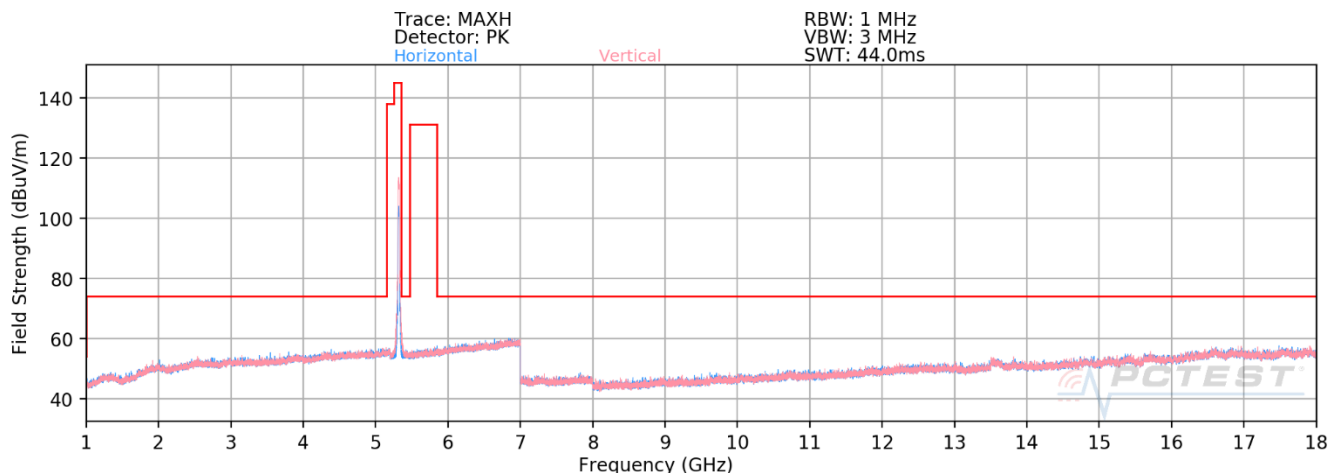


Plot 7-90. Radiated Spurious Emissions above 1GHz Antenna A (802.11n – Ch. 64)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5320MHz
Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	Average	-	-	-	-81.16	15.75	41.59	53.98	-12.39
* 10640.00	Peak	-	-	-	-71.16	15.75	51.59	73.98	-22.39
* 15960.00	Average	-	-	-	-82.19	21.28	46.09	53.98	-7.89
* 15960.00	Peak	-	-	-	-71.46	21.28	56.82	73.98	-17.16

Table 7-41. Radiated Measurements Antenna A

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 67 of 156

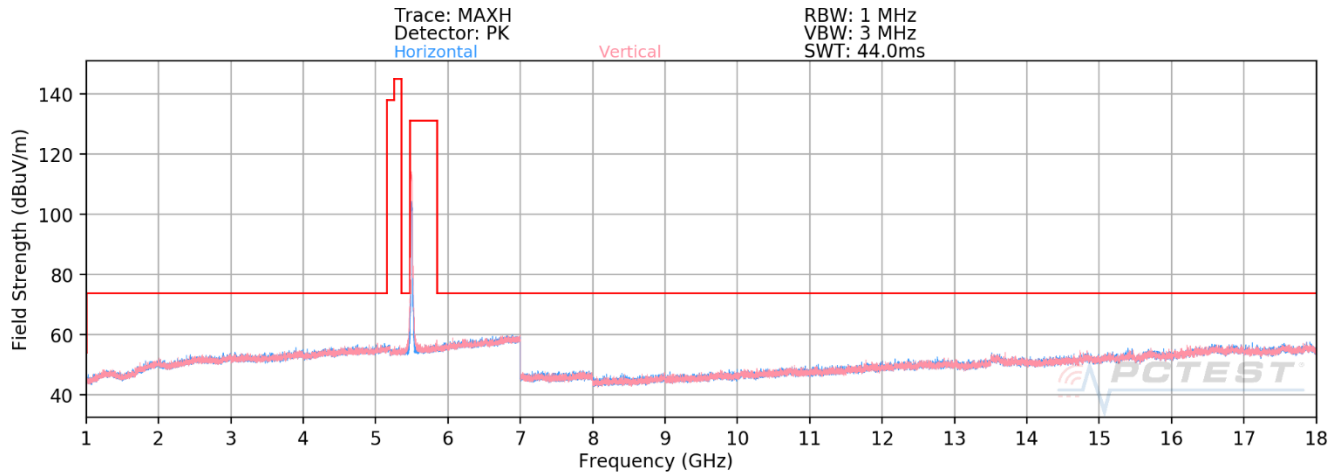


Plot 7-91. Radiated Spurious Emissions above 1GHz Antenna A (802.11n – Ch. 100)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5500MHz
Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11000.00	Average	-	-	-	-81.47	16.10	41.63	53.98	-12.35
* 11000.00	Peak	-	-	-	-71.77	16.10	51.33	73.98	-22.65
16500.00	Peak	-	-	-	-71.99	21.77	56.78	68.20	-11.42

Table 7-42. Radiated Measurements Antenna A

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 68 of 156

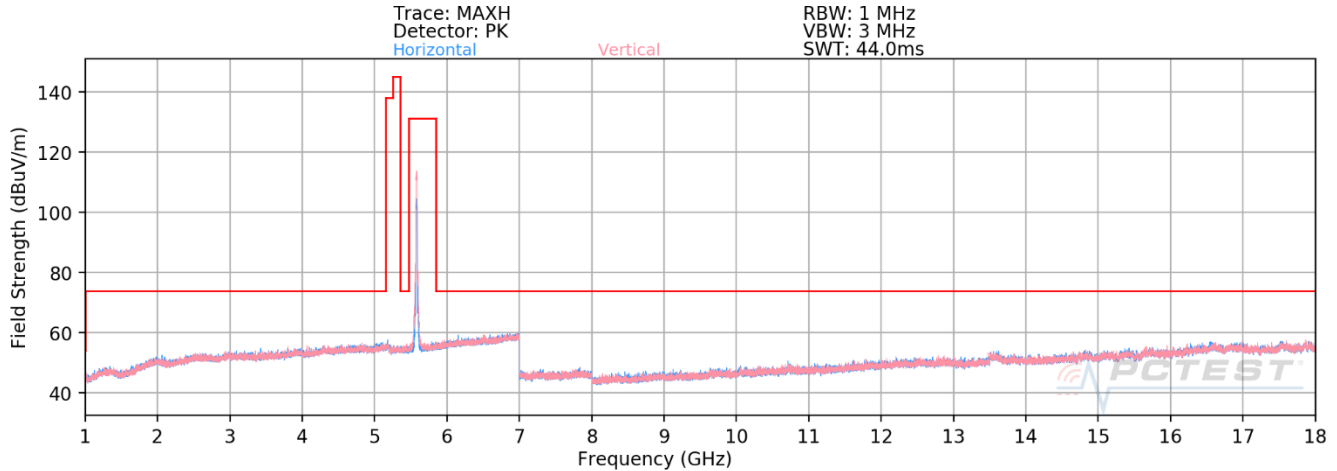


Plot 7-92. Radiated Spurious Emissions above 1GHz Antenna A (802.11n – Ch. 116)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5580Hz
Channel: 116

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11160.00	Average	-	-	-	-80.94	15.67	41.73	53.98	-12.25
* 11160.00	Peak	-	-	-	-70.77	15.67	51.90	73.98	-22.08
16740.00	Peak	-	-	-	-71.60	22.01	57.41	68.20	-10.79

Table 7-43. Radiated Measurements Antenna A

FCC ID: BCGA2603 IC: 579C-A2603		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 69 of 156

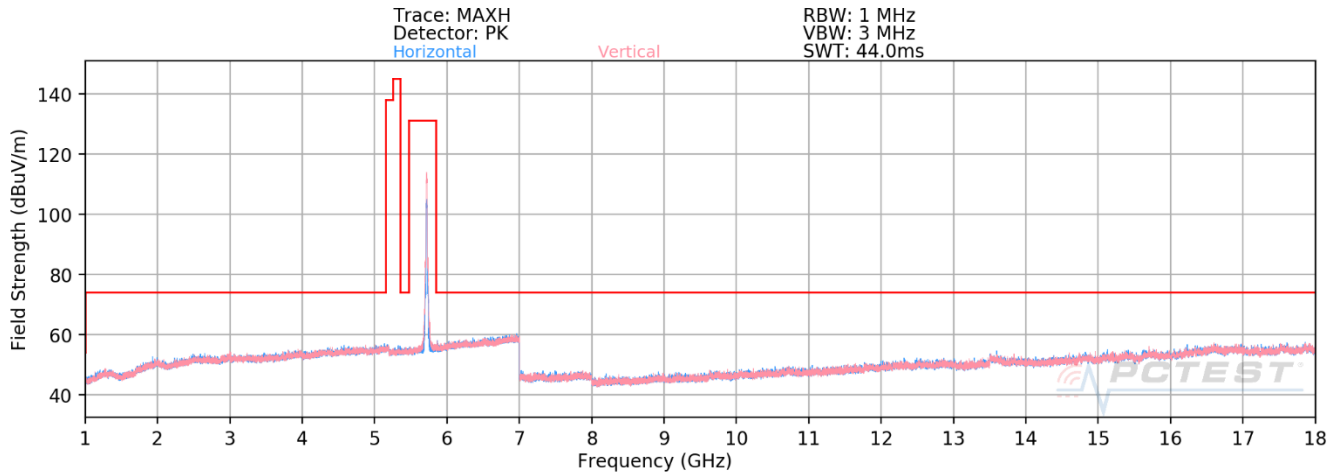


Plot 7-93. Radiated Spurious Emissions above 1GHz Antenna A (802.11n – Ch. 144)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5720
Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11440.00	Average	-	-	-	-81.06	16.35	42.29	53.98	-11.68
* 11440.00	Peak	-	-	-	-71.22	16.35	52.13	73.98	-21.84
17160.00	Peak	-	-	-	-70.95	21.45	57.50	68.20	-10.70

Table 7-44. Radiated Measurements Antenna A

FCC ID: BCGA2603 IC: 579C-A2603		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 70 of 156

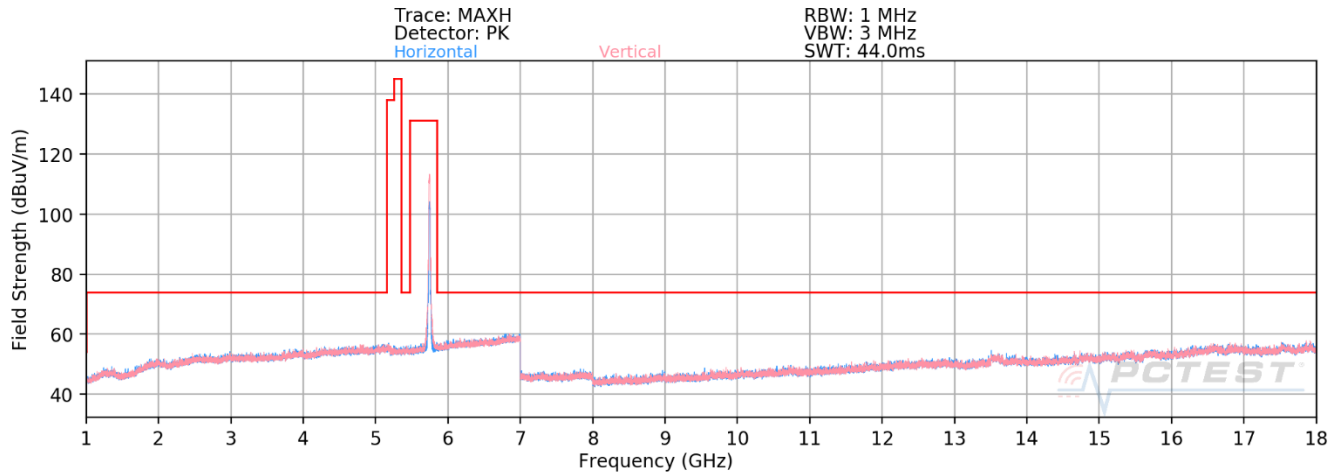


Plot 7-94. Radiated Spurious Emissions above 1GHz Antenna A (802.11n – Ch. 149)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5745MHz
Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11490.00	Average	-	-	-	-80.39	16.29	42.90	53.98	-11.08
* 11490.00	Peak	-	-	-	-71.65	16.29	51.64	73.98	-22.34
17235.00	Peak	-	-	-	-71.09	21.52	57.43	68.20	-10.77

Table 7-45. Radiated Measurements Antenna A

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 71 of 156

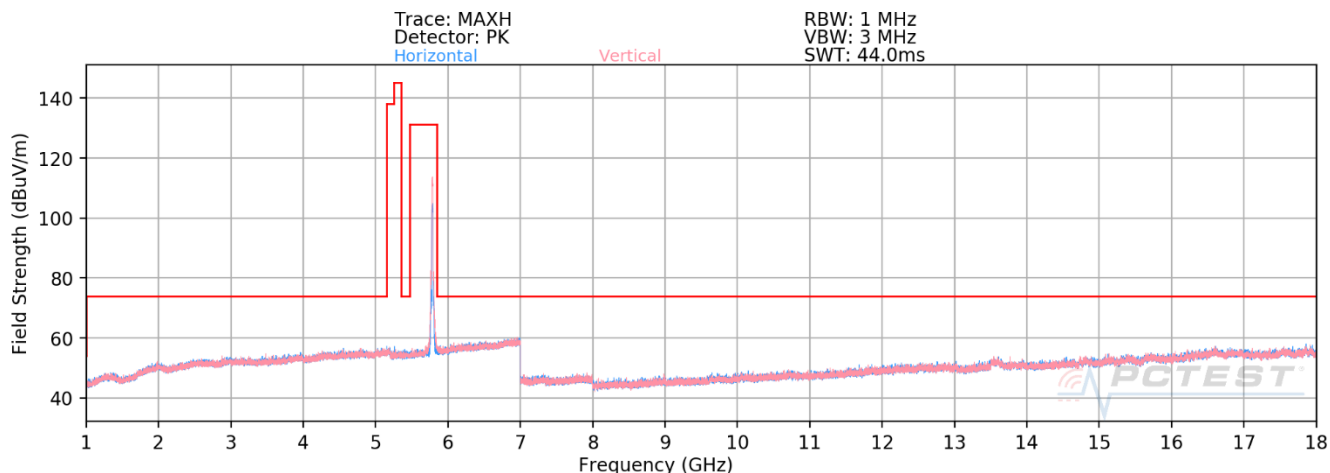


Plot 7-95. Radiated Spurious Emissions above 1GHz Antenna A (802.11n – Ch. 157)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5785MHz
Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11570.00	Average	-	-	-	-80.22	16.18	42.96	53.98	-11.02
* 11570.00	Peak	-	-	-	-71.34	16.18	51.84	73.98	-22.14
17355.00	Peak	-	-	-	-71.06	21.50	57.44	68.20	-10.76

Table 7-46. Radiated Measurements Antenna A

FCC ID: BCGA2603 IC: 579C-A2603		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 72 of 156

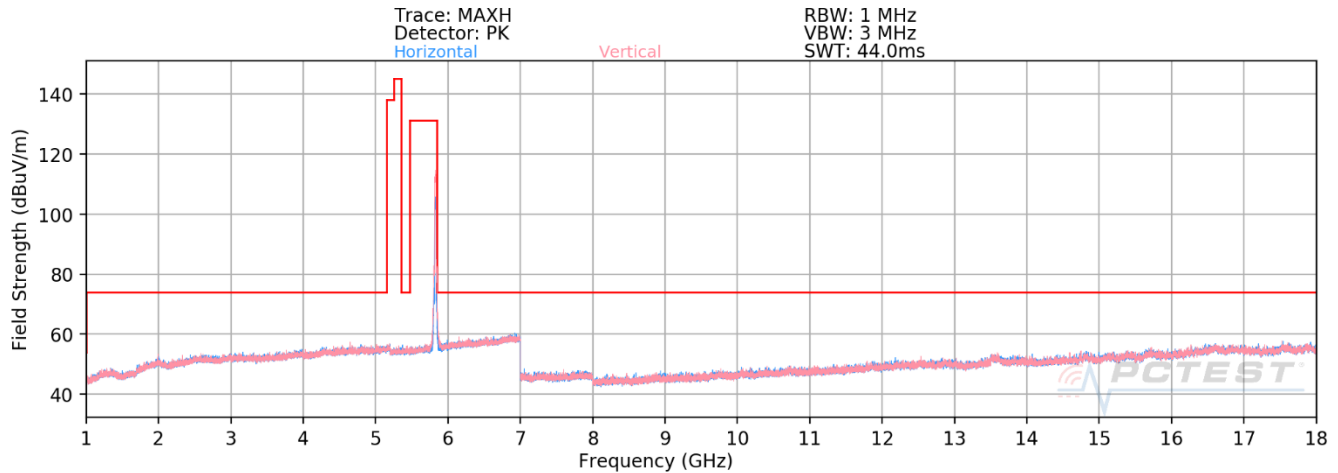

Plot 7-96. Radiated Spurious Emissions above 1GHz Antenna A (802.11n – Ch. 165)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5825MHz
Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	Average	-	-	-	-80.18	16.84	43.66	53.98	-10.32
* 11650.00	Peak	-	-	-	-71.71	16.84	52.13	73.98	-21.85
17475.00	Peak	-	-	-	-71.21	21.37	57.16	68.20	-11.04

Table 7-47. Radiated Measurements Antenna A

FCC ID: BCGA2603 IC: 579C-A2603		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 73 of 156

7.6.2 Antenna B Radiated Spurious Emission

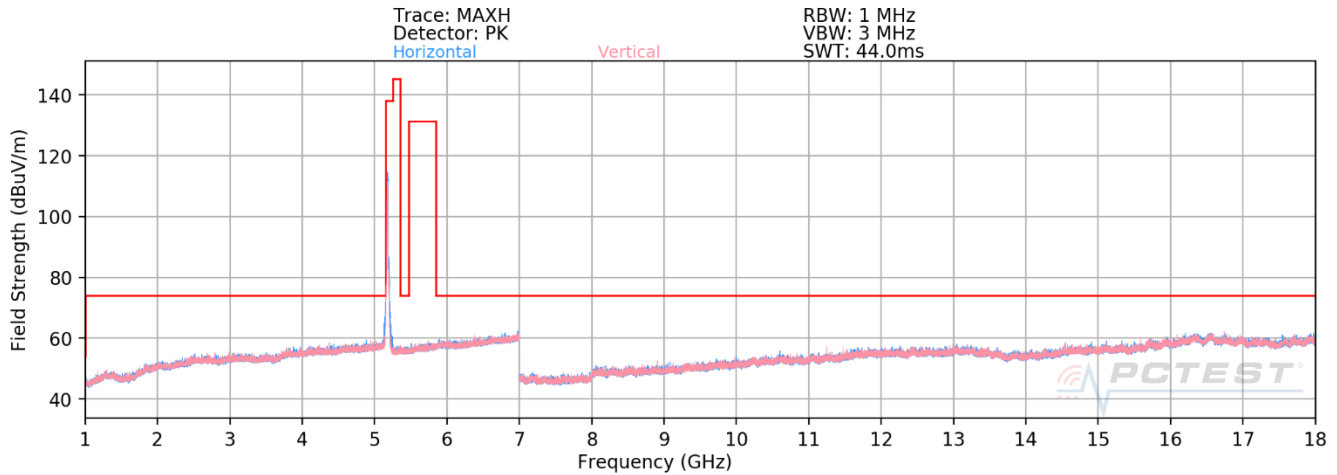


Plot 7-97. Radiated Spurious Emissions above 1GHz Antenna B (802.11n – Ch. 36)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5180MHz
Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10360.00	Peak	-	-	-	-69.64	15.41	52.77	68.20	-15.43
* 15540.00	Average	-	-	-	-81.33	20.26	45.93	53.98	-8.05
* 15540.00	Peak	-	-	-	-70.46	20.26	56.80	73.98	-17.18

Table 7-48. Radiated Measurements Antenna B

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 74 of 156

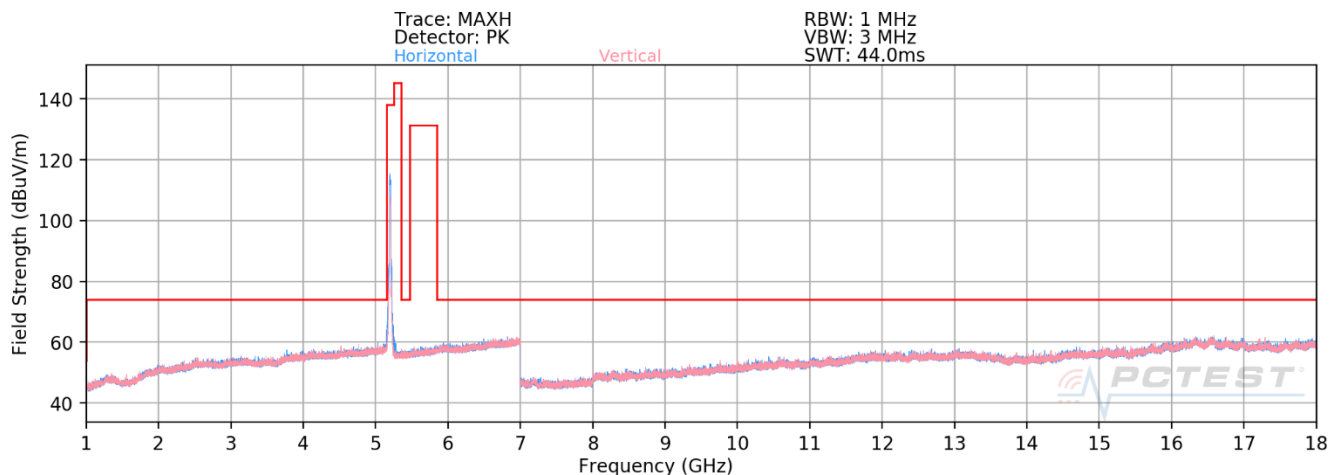


Plot 7-98. Radiated Spurious Emissions above 1GHz Antenna B (802.11n – Ch. 40)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5200MHz
Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	Peak	-	-	-	-70.62	15.59	51.97	68.20	-16.23
* 15600.00	Average	-	-	-	-81.44	20.26	45.82	53.98	-8.16
* 15600.00	Peak	-	-	-	-69.95	20.26	57.31	73.98	-16.67

Table 7-49. Radiated Measurements Antenna B

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 75 of 156

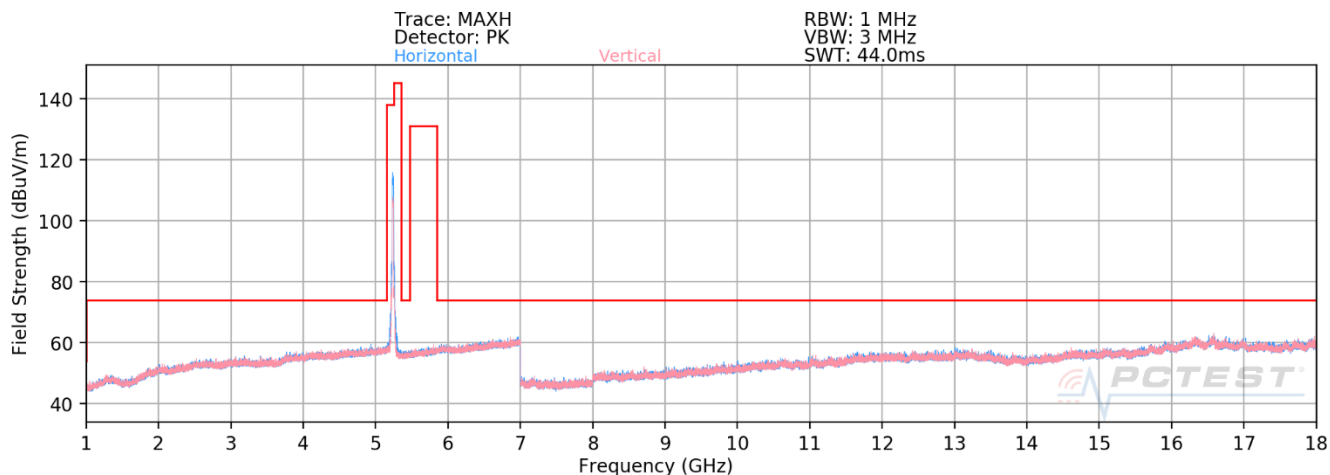


Plot 7-99. Radiated Spurious Emissions above 1GHz Antenna B (802.11n – Ch. 48)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5240MHz
Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	-	-	-	-69.45	15.32	52.87	68.20	-15.33
* 15720.00	Average	-	-	-	-81.37	21.24	46.87	53.98	-7.10
* 15720.00	Peak	-	-	-	-70.35	21.24	57.89	73.98	-16.08

Table 7-50. Radiated Measurements Antenna B

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 76 of 156

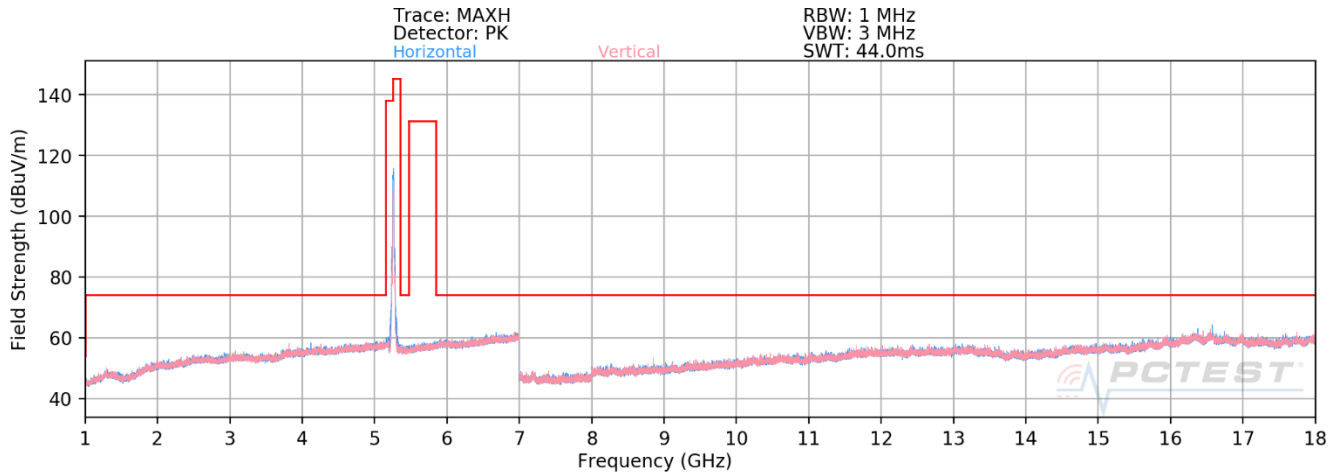


Plot 7-100. Radiated Spurious Emissions above 1GHz Antenna B (802.11n – Ch. 52)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5260MHz
Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	-	-	-	-68.03	15.10	54.07	68.20	-14.13
* 15780.00	Average	-	-	-	-80.44	20.23	46.79	53.98	-7.19
* 15780.00	Peak	-	-	-	-68.06	20.23	59.17	73.98	-14.81

Table 7-51. Radiated Measurements Antenna B

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 77 of 156

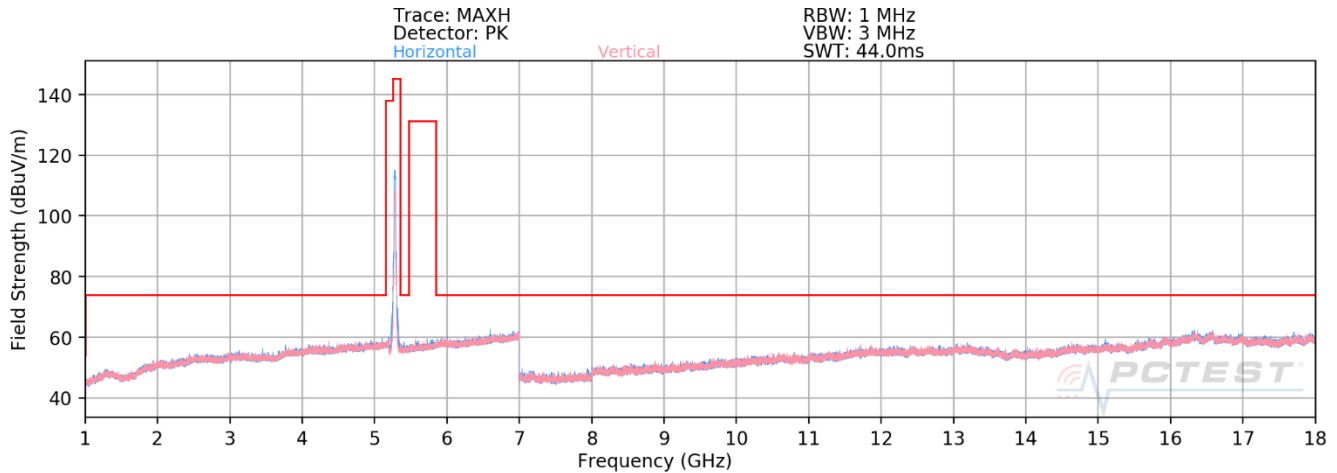


Plot 7-101. Radiated Spurious Emissions above 1GHz Antenna B (802.11n – Ch. 56)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5280MHz
Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	Peak	-	-	-	-67.40	15.47	55.07	68.20	-13.13
* 15840.00	Average	-	-	-	-80.44	20.34	46.90	53.98	-7.07
* 15840.00	Peak	-	-	-	-68.25	20.34	59.09	73.98	-14.88

Table 7-52. Radiated Measurements Antenna B

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 78 of 156

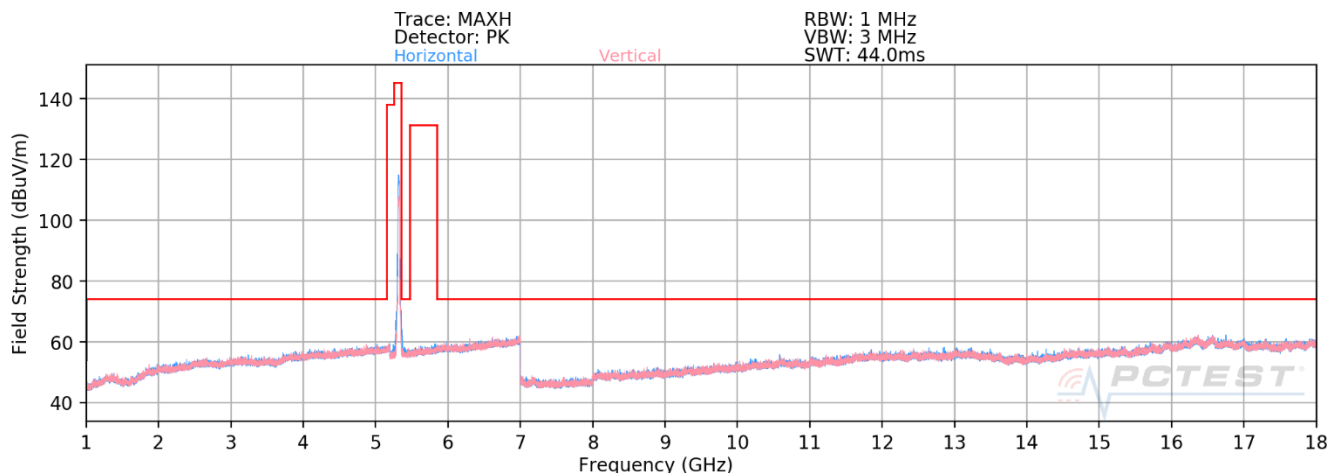


Plot 7-102. Radiated Spurious Emissions above 1GHz Antenna B (802.11n – Ch. 64)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5320MHz
Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	Average	-	-	-	-79.56	15.75	43.19	53.98	-10.79
* 10640.00	Peak	-	-	-	-68.15	15.75	54.60	73.98	-19.38
* 15960.00	Average	-	-	-	-81.19	21.28	47.09	53.98	-6.89
* 15960.00	Peak	-	-	-	-68.26	21.28	60.02	73.98	-13.96

Table 7-53. Radiated Measurements Antenna B

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 79 of 156

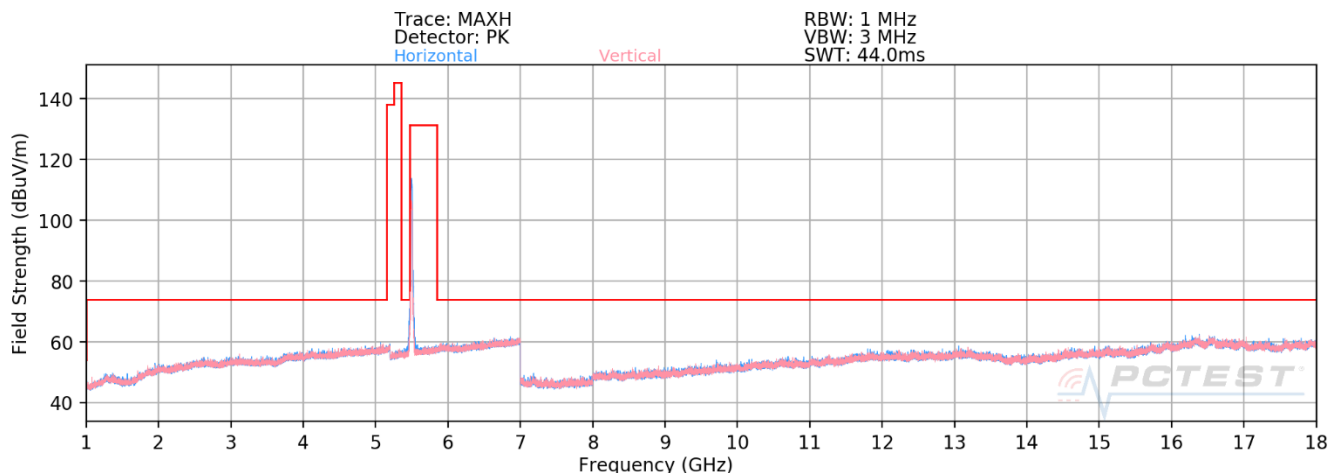


Plot 7-103. Radiated Spurious Emissions above 1GHz Antenna B (802.11n – Ch. 100)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5500MHz
Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	Average	-	-	-	-79.85	16.10	43.25	53.98	-10.73
* 11000.00	Peak	-	-	-	-68.29	16.10	54.81	73.98	-19.17
16500.00	Peak	-	-	-	-67.81	21.77	60.96	68.20	-7.24

Table 7-54. Radiated Measurements Antenna B

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 80 of 156

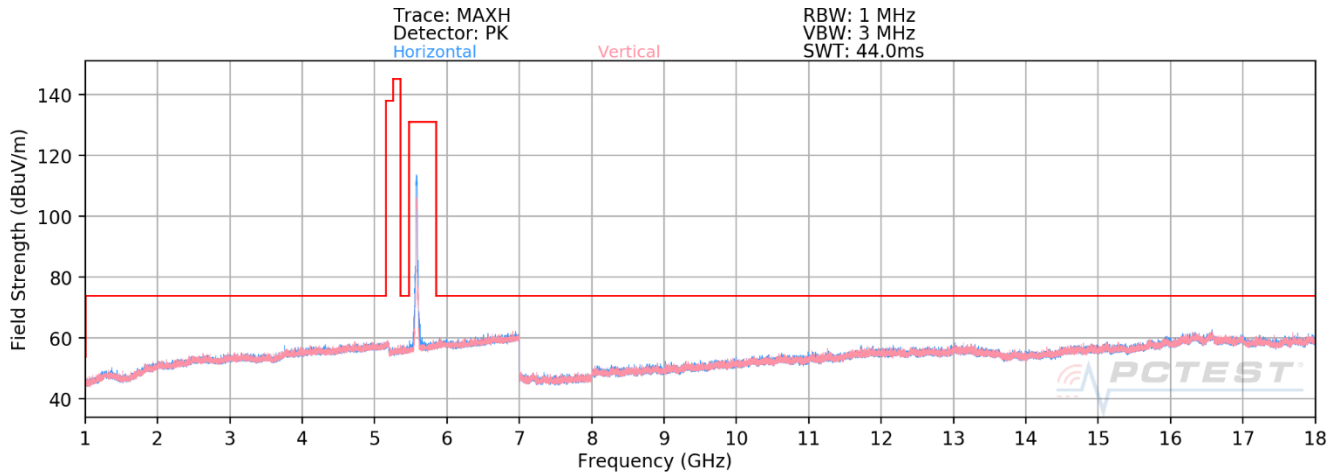


Plot 7-104. Radiated Spurious Emissions above 1GHz Antenna B (802.11n – Ch. 116)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5580MHz
Channel: 116

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11160.00	Average	-	-	-	-79.48	15.67	43.19	53.98	-10.79
* 11160.00	Peak	-	-	-	-67.82	15.67	54.85	73.98	-19.13
16740.00	Peak	-	-	-	-68.03	22.01	60.98	68.20	-7.22

Table 7-55. Radiated Measurements Antenna B

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 81 of 156

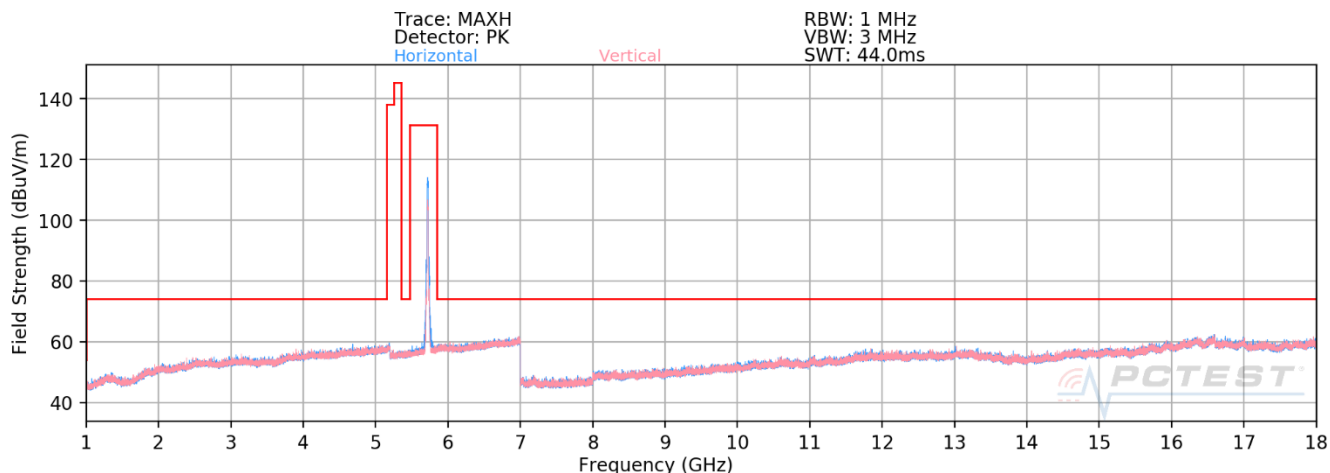


Plot 7-105. Radiated Spurious Emissions above 1GHz Antenna B (802.11n – Ch. 144)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5720MHz
Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11440.00	Average	-	-	-	-79.35	16.35	44.00	53.98	-9.97
* 11440.00	Peak	-	-	-	-67.02	16.35	56.33	73.98	-17.64
17160.00	Peak	-	-	-	-67.58	21.45	60.87	68.20	-7.33

Table 7-56. Radiated Measurements Antenna B

FCC ID: BCGA2603 IC: 579C-A2603		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 82 of 156

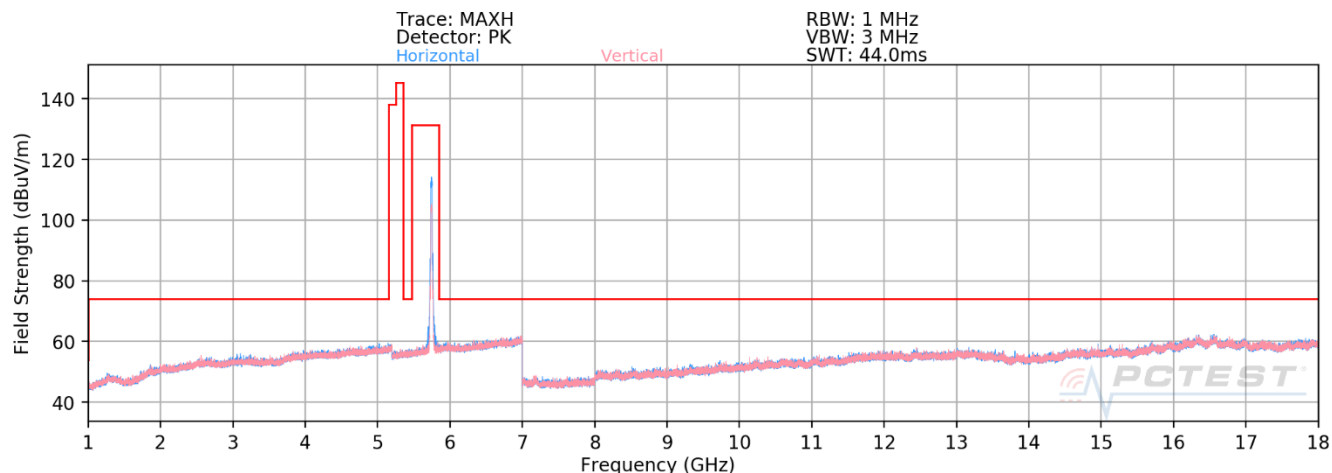


Plot 7-106. Radiated Spurious Emissions above 1GHz Antenna B (802.11n – Ch. 149)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5745MHz
Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11490.00	Average	-	-	-	-79.35	16.29	43.94	53.98	-10.04
* 11490.00	Peak	-	-	-	-67.85	16.29	55.44	73.98	-18.54
17235.00	Peak	-	-	-	-67.42	21.52	61.10	68.20	-7.10

Table 7-57. Radiated Measurements Antenna B

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 83 of 156

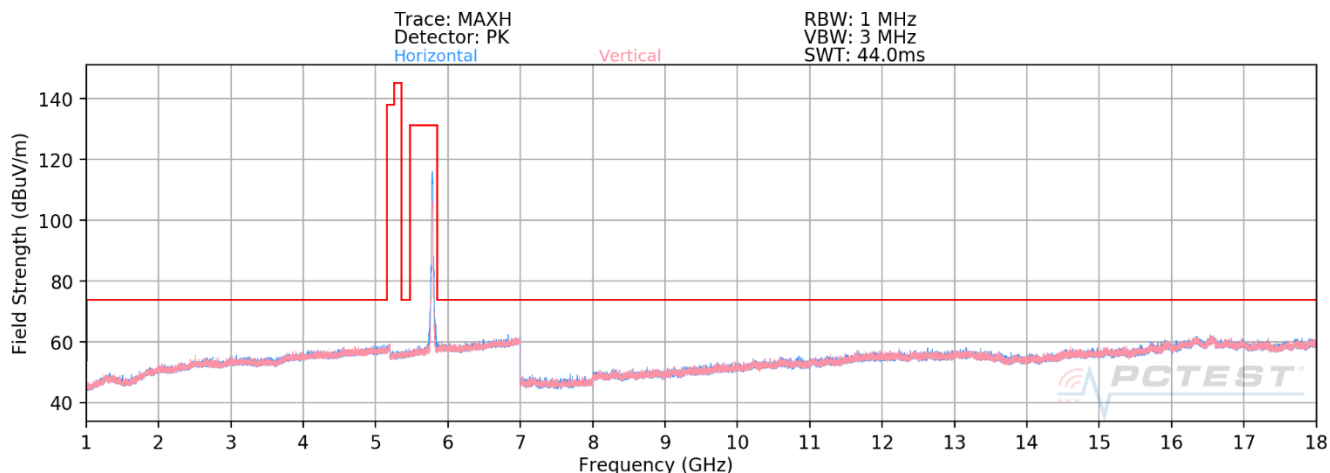


Plot 7-107. Radiated Spurious Emissions above 1GHz Antenna B (802.11n – Ch. 157)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5785MHz
Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11570.00	Average	-	-	-	-79.20	16.18	43.98	53.98	-10.00
* 11570.00	Peak	-	-	-	-69.12	16.18	54.06	73.98	-19.92
17355.00	Peak	-	-	-	-70.78	21.50	57.72	68.20	-10.48

Table 7-58. Radiated Measurements Antenna B

FCC ID: BCGA2603 IC: 579C-A2603	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 84 of 156

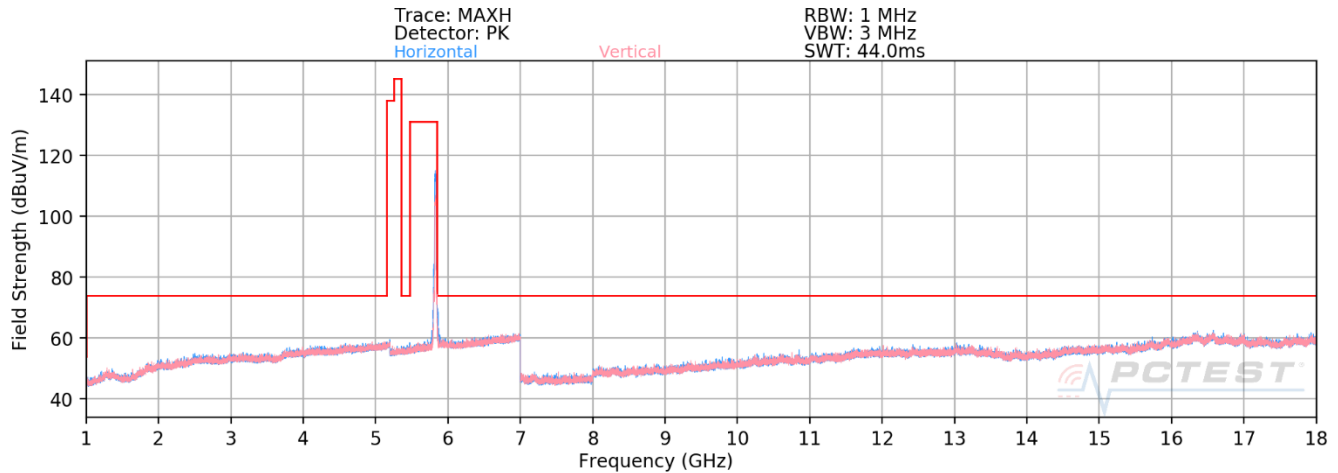

Plot 7-108. Radiated Spurious Emissions above 1GHz Antenna B (802.11n – Ch. 165)


Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5825MHz
Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	Average	-	-	-	-78.70	16.84	45.14	53.98	-8.84
* 11650.00	Peak	-	-	-	-69.33	16.84	54.51	73.98	-19.47
17475.00	Peak	-	-	-	-70.46	21.37	57.91	68.20	-10.29

Table 7-59. Radiated Measurements Antenna B

FCC ID: BCGA2603 IC: 579C-A2603		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 85 of 156

7.6.3 CDD/SDM Radiated Spurious Emission

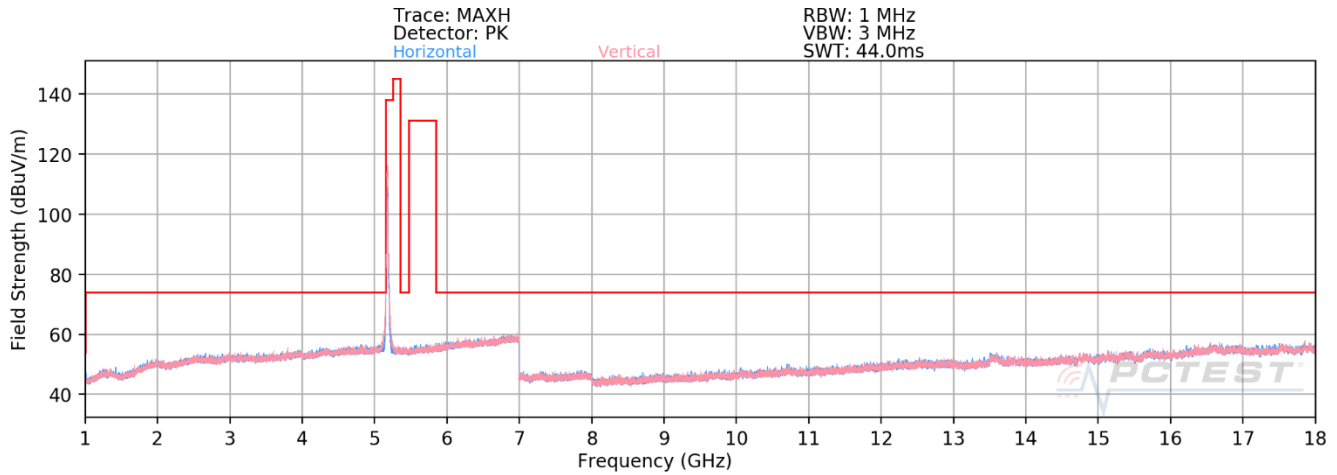


Plot 7-109. Radiated Spurious Emissions above 1GHz CDD (802.11n – Ch. 36)

Mode: 802.11n
Data Rate: MCS8
Distance of Measurements: 3 Meters
Operating Frequency: 5180MHz
Channel: 36


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10360.00	Peak	-	-	-	-69.86	15.41	52.55	68.20	-15.65
* 15540.00	Average	-	-	-	-81.29	20.26	45.97	53.98	-8.01
* 15540.00	Peak	-	-	-	-70.06	20.26	57.20	73.98	-16.78

Table 7-60. Radiated Measurements CDD

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 86 of 156

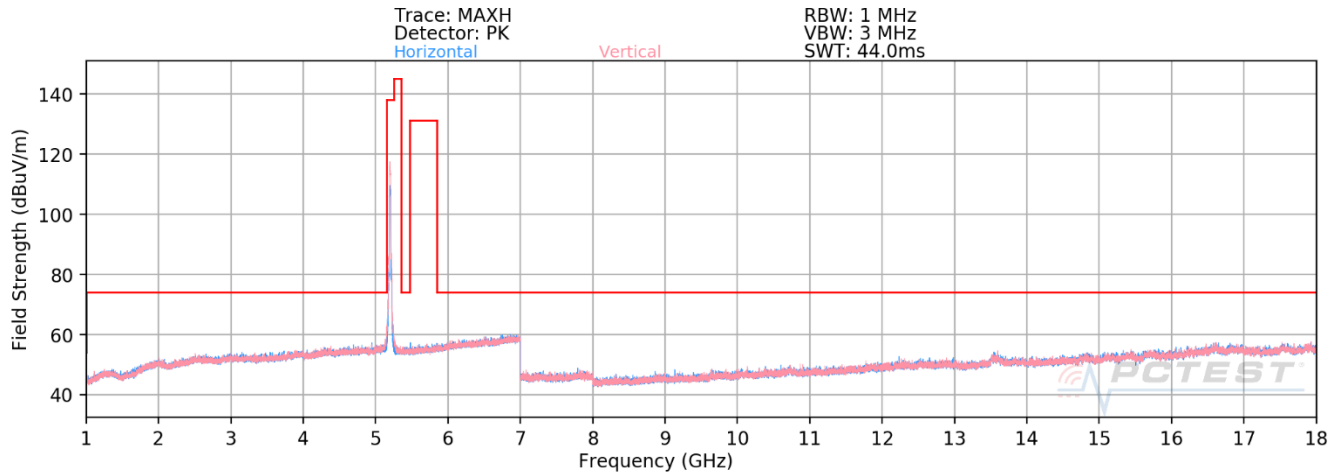


Plot 7-110. Radiated Spurious Emissions above 1GHz CDD (802.11n – Ch. 40)

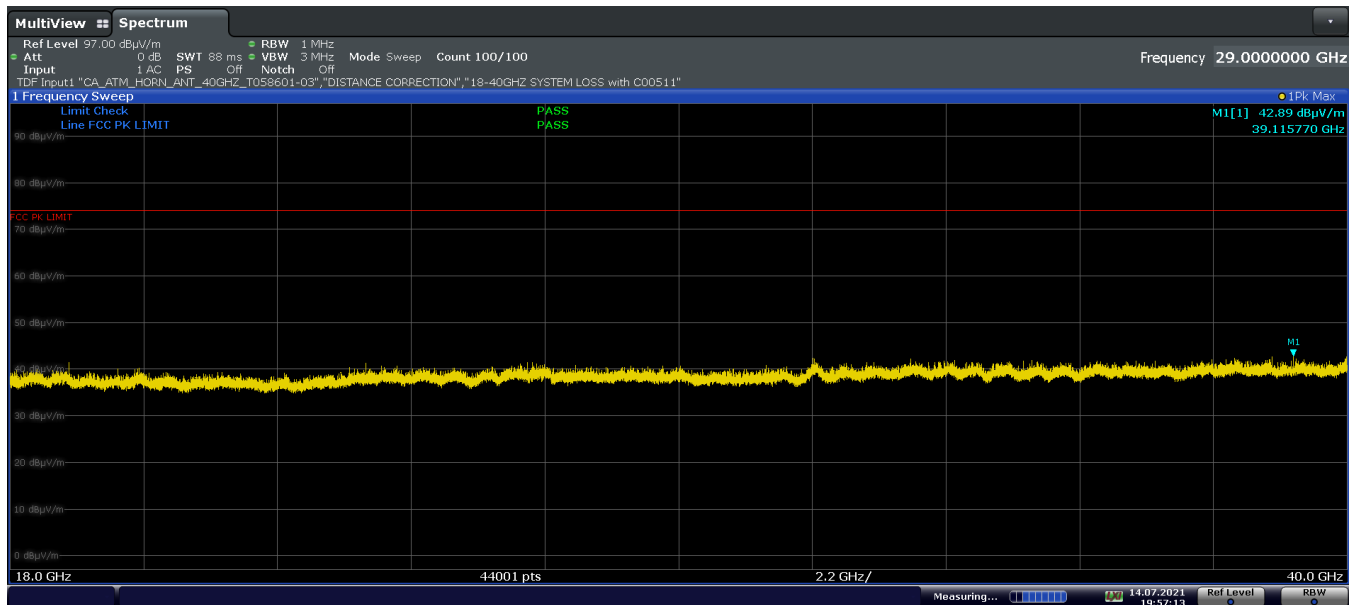

Plot 7-111. Radiated Spurious Emissions 18GHz - 40GHz CDD (802.11n – Ch.40, Pol. H)

FCC ID: BCGA2603 IC: 579C-A2603		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 87 of 156

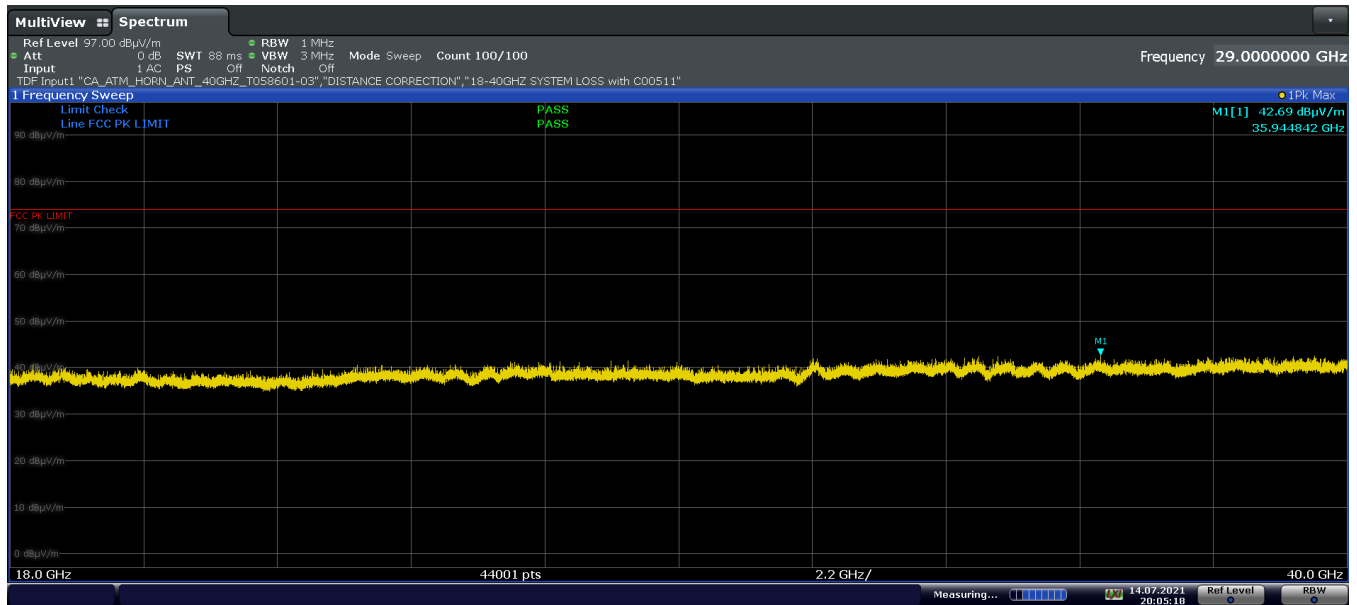


Plot 7-112. Radiated Spurious Emissions 18GHz - 40GHz CDD (802.11n – Ch.40, Pol. V)

Mode: 802.11n
Data Rate: MCS8
Distance of Measurements: 3 Meters
Operating Frequency: 5200MHz
Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	Peak	-	-	-	-69.97	15.59	52.62	68.20	-15.58
* 15600.00	Average	-	-	-	-81.34	20.26	45.92	53.98	-8.06
* 15600.00	Peak	-	-	-	-70.11	20.26	57.15	73.98	-16.83

Table 7-61. Radiated Measurements CDD

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 88 of 156

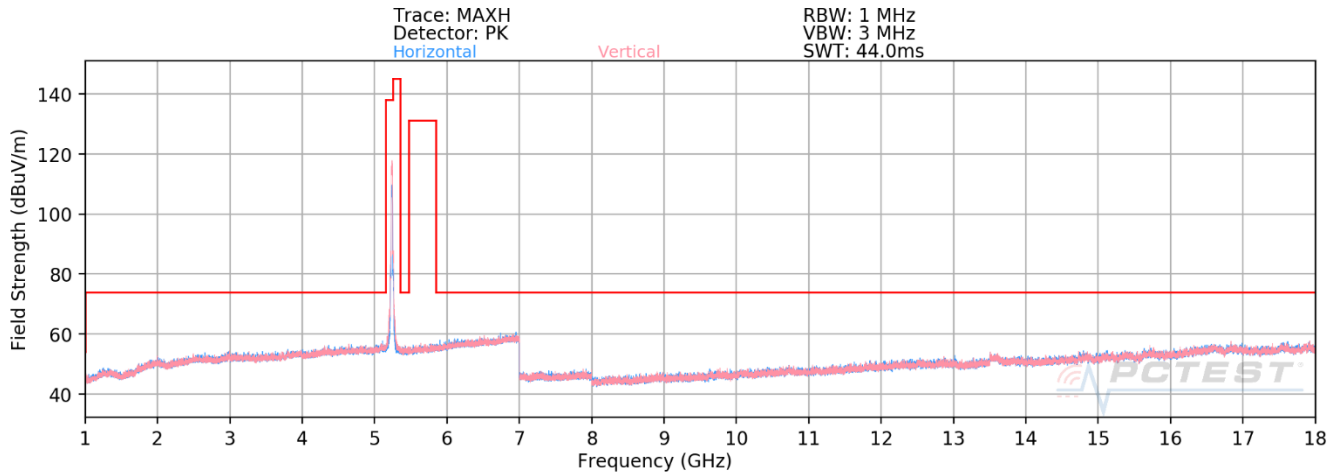


Plot 7-113. Radiated Spurious Emissions above 1GHz CDD (802.11n – Ch. 48)

Mode: 802.11n
Data Rate: MCS8
Distance of Measurements: 3 Meters
Operating Frequency: 5240MHz
Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	-	-	-	-69.33	15.32	52.99	68.20	-15.21
* 15720.00	Average	-	-	-	-81.21	21.24	47.03	53.98	-6.94
* 15720.00	Peak	-	-	-	-69.29	21.24	58.95	73.98	-15.02

Table 7-62. Radiated Measurements CDD

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 89 of 156

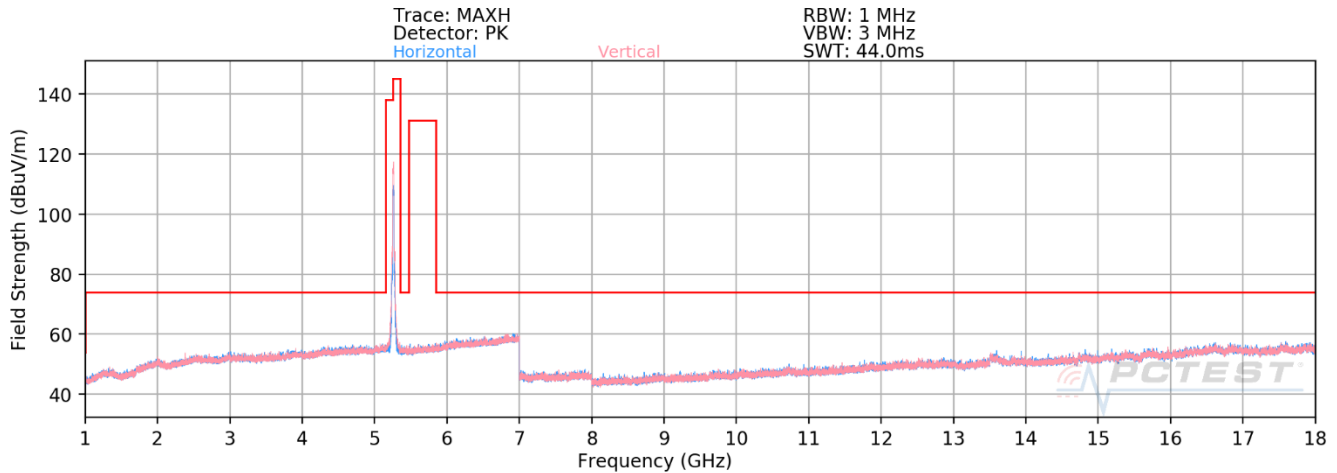


Plot 7-114. Radiated Spurious Emissions above 1GHz SDM (802.11n – Ch. 52)

Mode: 802.11n
Data Rate: MCS8
Distance of Measurements: 3 Meters
Operating Frequency: 5260MHz
Channel: 52


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	-	-	-	-69.50	15.10	52.60	68.20	-15.60
* 15780.00	Average	-	-	-	-81.02	20.23	46.21	53.98	-7.77
* 15780.00	Peak	-	-	-	-69.79	20.23	57.44	73.98	-16.54

Table 7-63. Radiated Measurements SDM

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 90 of 156

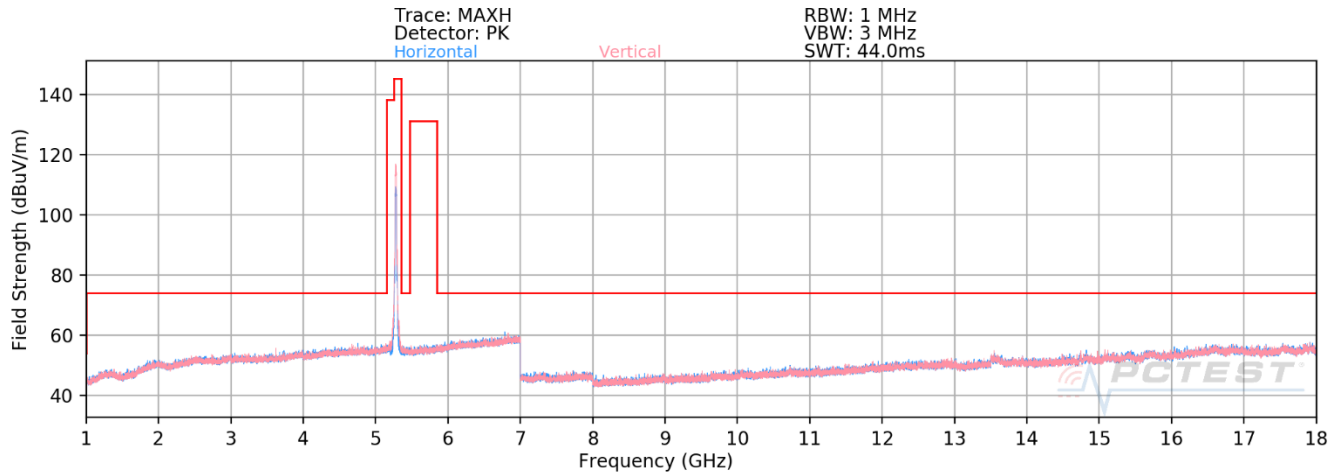

Plot 7-115. Radiated Spurious Emissions above 1GHz SDM (802.11n – Ch. 56)

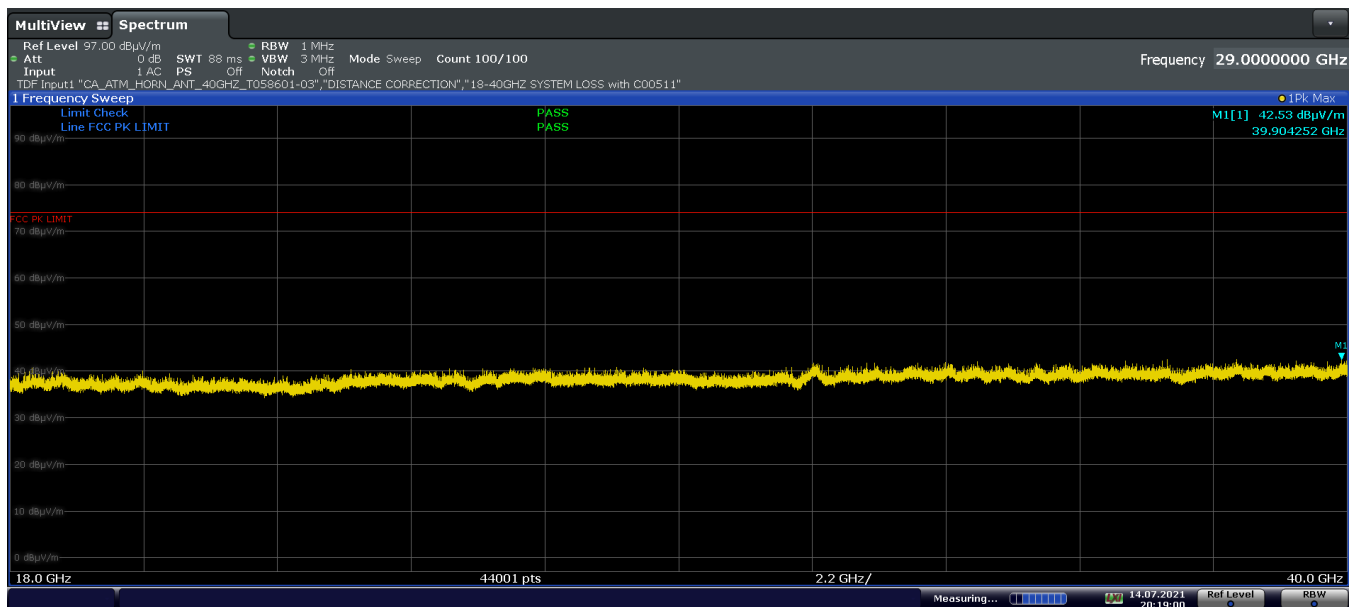

Plot 7-116. Radiated Spurious Emissions 18GHz - 40GHz SDM (802.11n – Ch.56, Pol. H)

FCC ID: BCGA2603 IC: 579C-A2603		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 91 of 156