



Plot 7-85. Conducted Spurious Plot Antenna A (802.11b – Ch. 11)

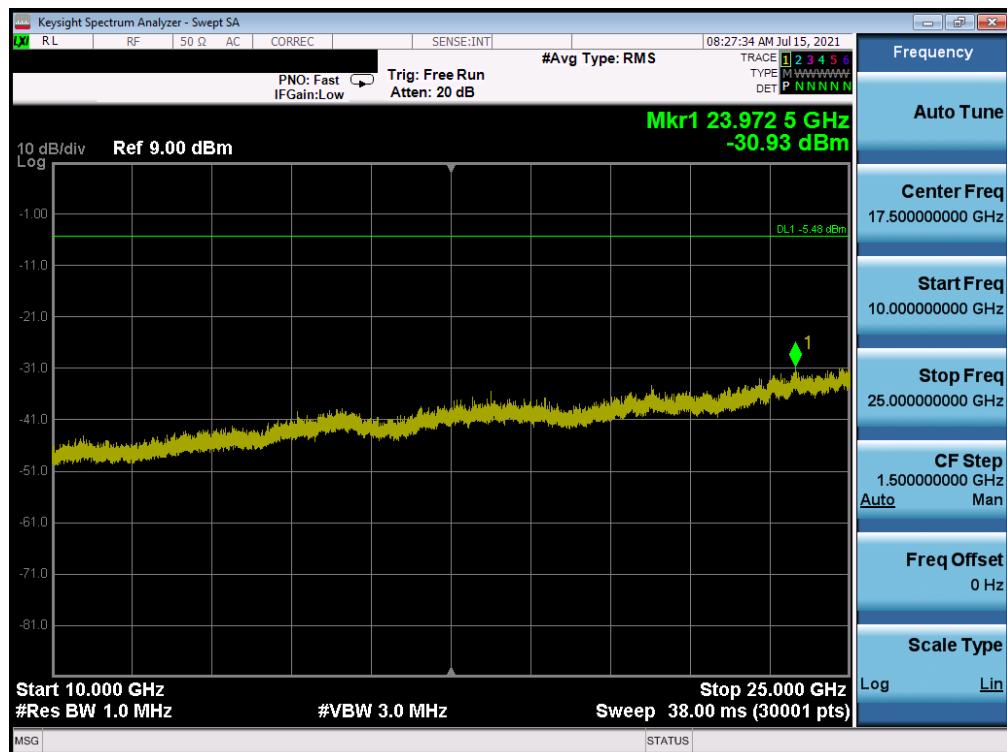


Plot 7-86. Conducted Spurious Plot Antenna A (802.11b – Ch. 11)

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 74 of 112

Antenna B Conducted Spurious Emissions

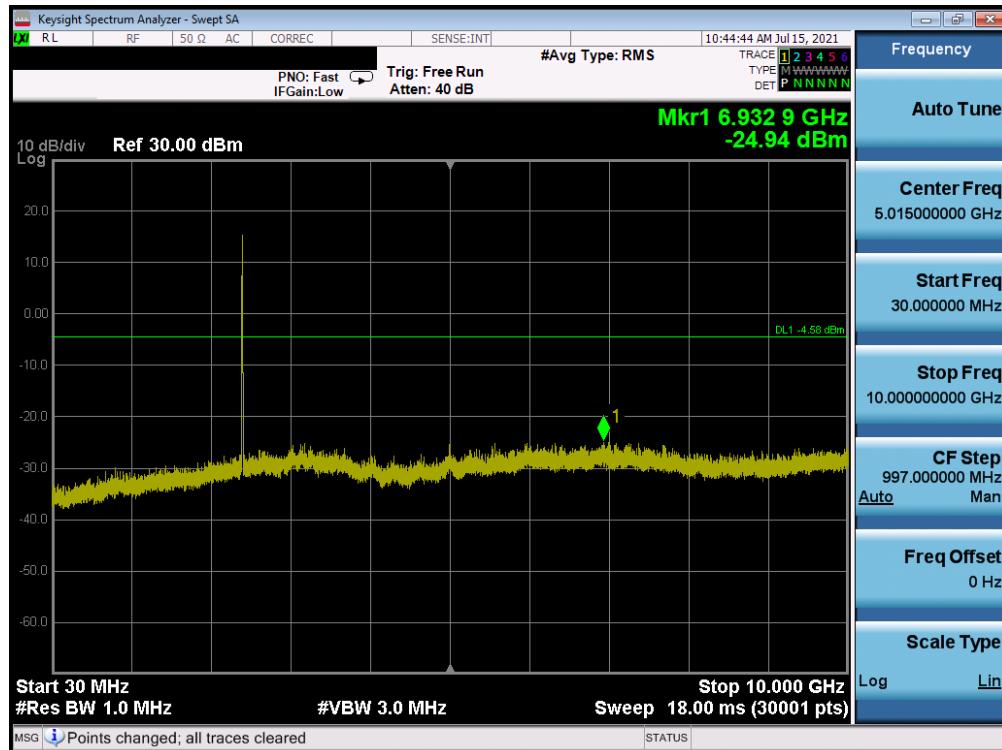


Plot 7-87. Conducted Spurious Plot Antenna B (802.11b – Ch. 1)

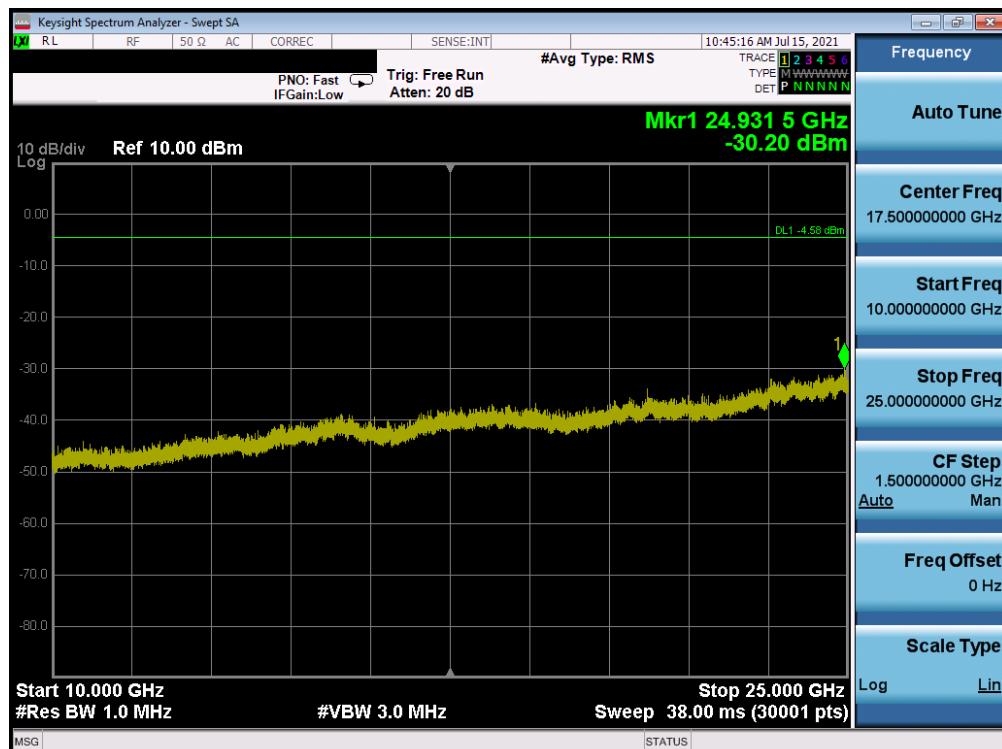


Plot 7-88. Conducted Spurious Plot Antenna B (802.11b – Ch. 1)

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 75 of 112

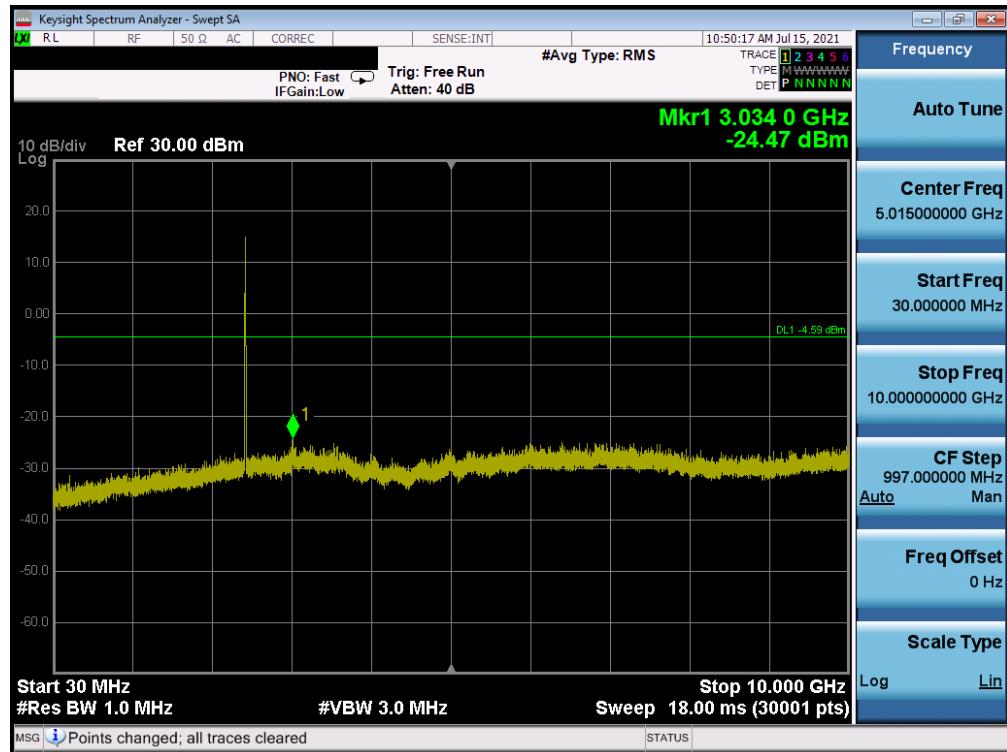


Plot 7-89. Conducted Spurious Plot Antenna B (802.11b – Ch. 6)

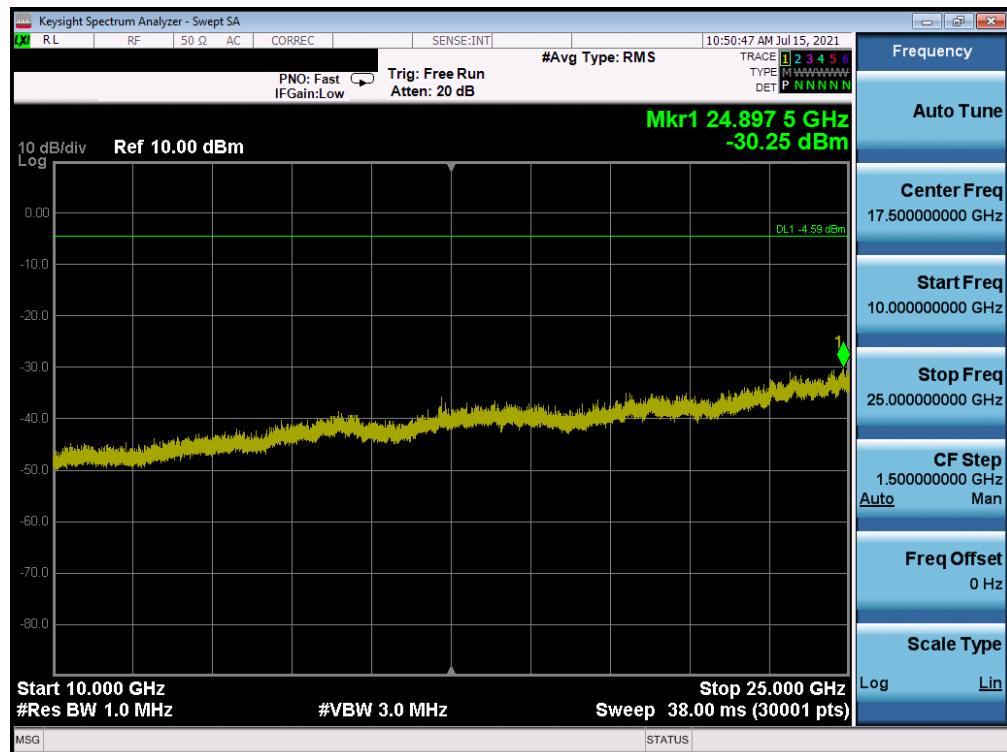


Plot 7-90. Conducted Spurious Plot Antenna B (802.11b – Ch. 6)

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 76 of 112

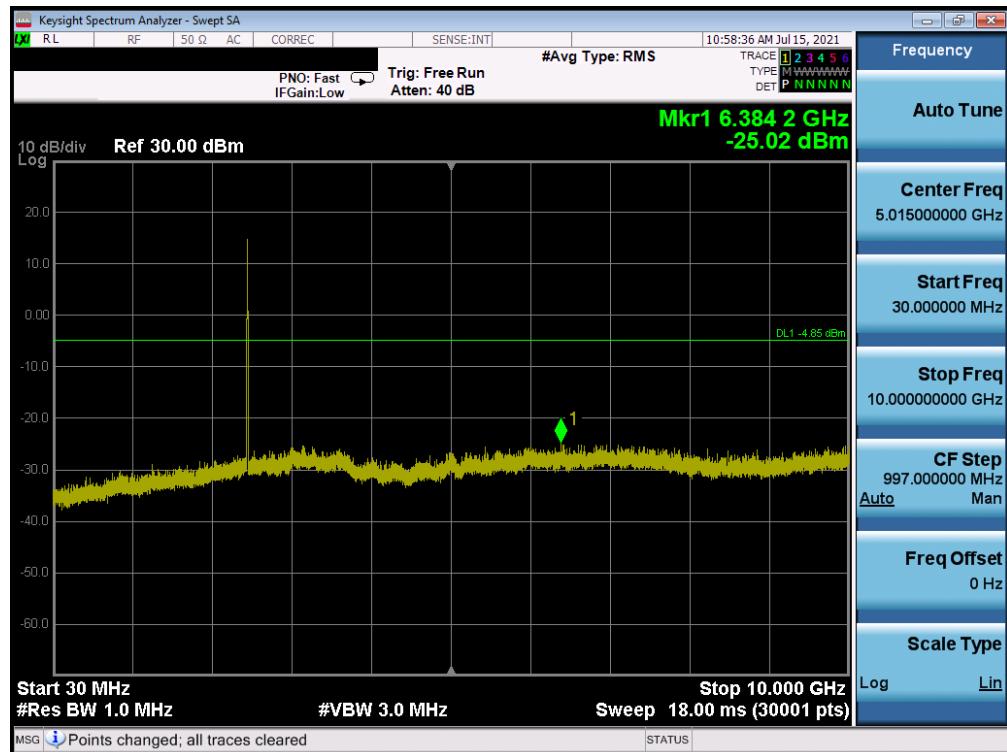

Plot 7-91. Conducted Spurious Plot Antenna B (802.11b – Ch. 11)

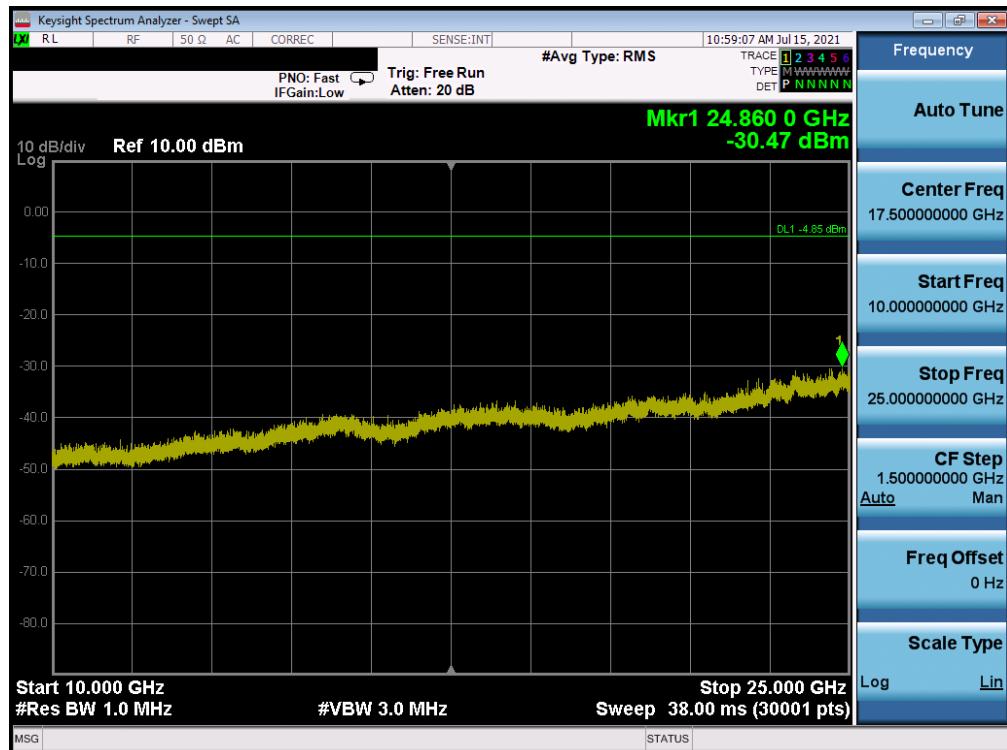

Plot 7-92. Conducted Spurious Plot Antenna B (802.11b – Ch. 11)

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 77 of 112

7.7 Radiated Spurious Emissions – Above 1 GHz

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-15 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-15. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Section 6.6.4.3
KDB 558074 D01 v05r02 – Sections 8.6, 8.7

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times$ span/RBW)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 78 of 112

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

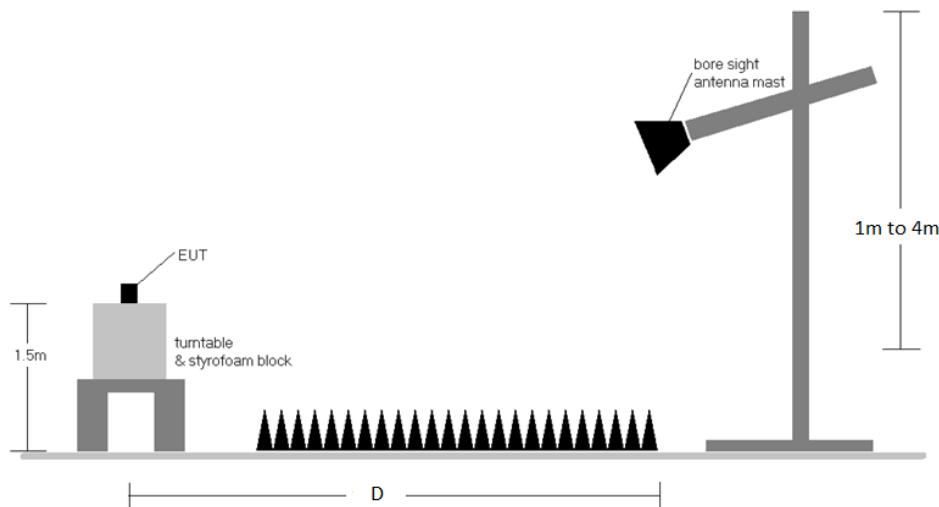


Figure 7-6. Radiated Measurement Setup

Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 558074 D01 v05r02 were not used to evaluate this device for compliance to radiated limits. All Radiated Spurious Emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in Section 15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-15.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
6. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
9. All antenna configurations were investigated and only the worst case is reported.
10. The unit was tested with all possible modes and only the highest emission is reported.

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 - 07/23/2021	EUT Type: Tablet Device	Page 79 of 112	

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level [$\text{dB}_{\mu\text{V/m}}$] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] – Preamplifier Gain [dB]
- Margin [dB] = Field Strength Level [$\text{dB}_{\mu\text{V/m}}$] – Limit [$\text{dB}_{\mu\text{V/m}}$]

Radiated Band Edge Measurement Offset


- The amplitude offsets shown in the radiated restricted band edge plots in Sections 7.7.4, 7.7.5, and 7.7.6 were calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 80 of 112

7.7.1 Antenna A Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

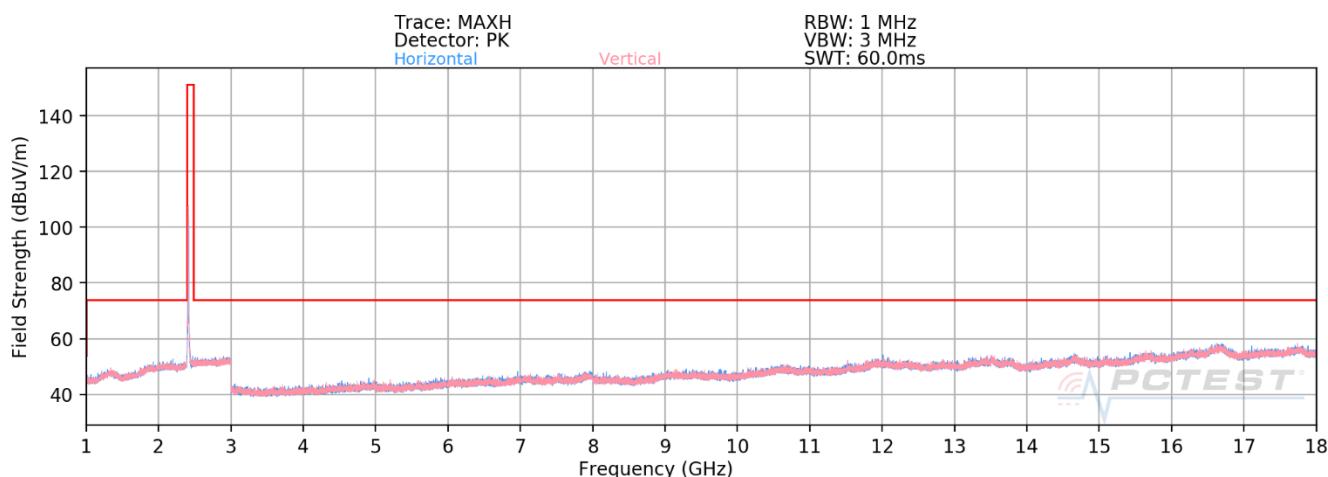


Plot 7-93. Radiated Spurious Emissions above 1GHz Antenna A (802.11b – Ch. 1)

Mode: 802.11b
 Data Rate: 1Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	-	-	-	-81.43	8.01	33.58	53.98	-20.40
4824.00	Peak	-	-	-	-70.08	8.01	44.93	73.98	-29.05
12060.00	Avg	-	-	-	-80.79	17.60	43.81	53.98	-10.17
12060.00	Peak	-	-	-	-69.42	17.60	55.18	73.98	-18.80

Table 7-16. Radiated Measurements Antenna A

FCC ID: BCGA2603 IC: 579C-A2603	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 81 of 112	

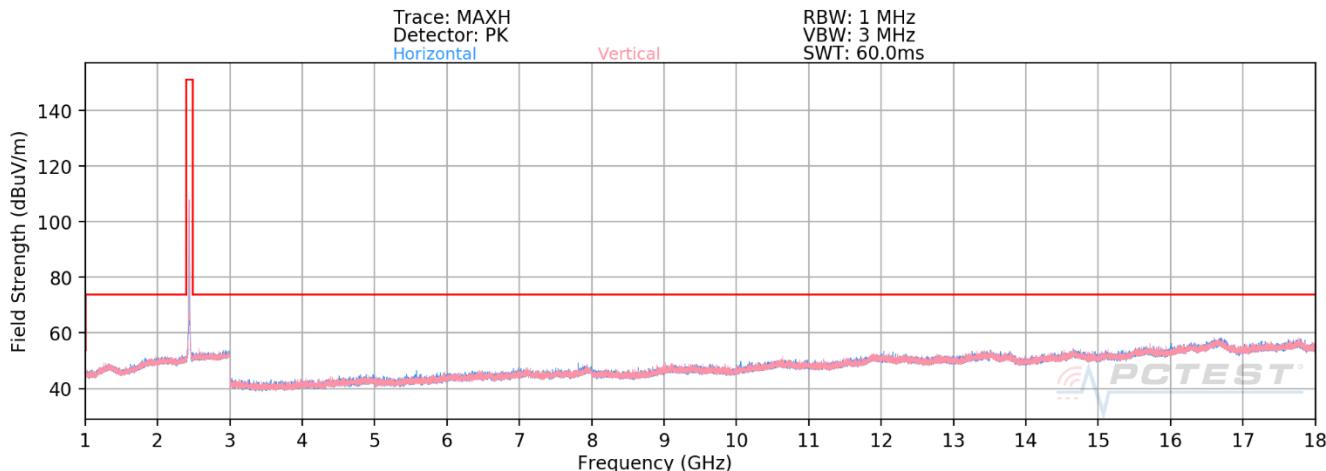


Plot 7-94. Radiated Spurious Emissions above 1GHz Antenna A (802.11b – Ch. 6)

Mode: 802.11b
 Data Rate: 1Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4874.00	Avg	V	310	6	-79.27	8.23	35.96	53.98	-18.02
4874.00	Peak	V	310	6	-69.03	8.23	46.20	73.98	-27.78
7311.00	Avg	V	277	57	-79.21	11.25	39.04	53.98	-14.94
7311.00	Peak	V	277	57	-68.64	11.25	49.61	73.98	-24.37
12185.00	Avg	V	-	-	-80.57	17.33	43.76	53.98	-10.22
12185.00	Peak	V	-	-	-69.67	17.33	54.66	73.98	-19.32

Table 7-17. Radiated Measurements Antenna A

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST[®] Proud to be part of element			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device			

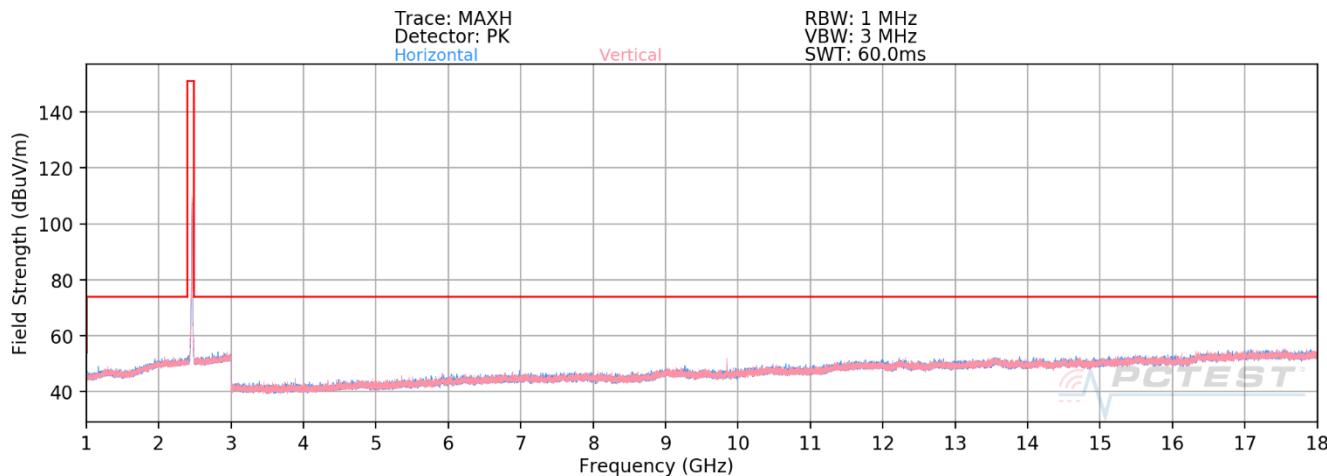

Plot 7-95. Radiated Spurious Emissions above 1GHz Antenna A (802.11b – Ch. 11)

Mode:	802.11b
Data Rate:	1Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4924.00	Avg	V	297	8	-75.06	4.95	36.89	53.98	-17.09
4924.00	Peak	V	297	8	-67.82	4.95	44.13	73.98	-29.85
7386.00	Avg	V	269	48	-75.29	8.52	40.23	53.98	-13.75
7386.00	Peak	V	269	48	-67.43	8.52	48.09	73.98	-25.89
12310.00	Avg	V	-	-	-82.28	15.02	39.74	53.98	-14.24
12310.00	Peak	V	-	-	-71.42	15.02	50.60	73.98	-23.38

Table 7-18. Radiated Measurements Antenna A

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST[®] Proud to be part of element			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device			

7.7.2 Antenna B Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

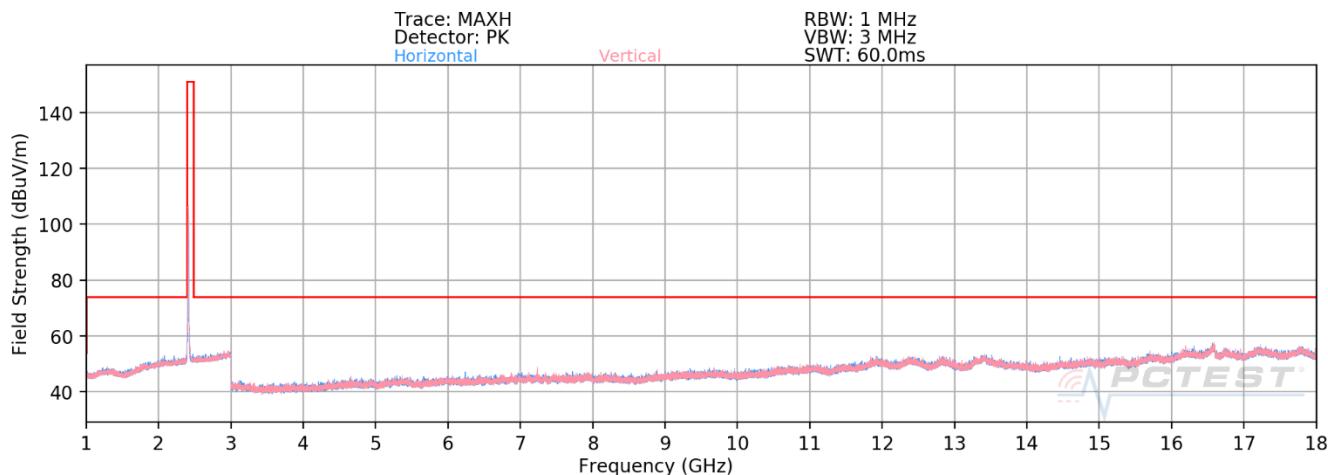


Plot 7-96. Radiated Spurious Emissions above 1GHz Antenna B (802.11b – Ch. 1)

Mode: 802.11b
 Data Rate: 1Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4824.00	Avg	V	333	13	-77.12	6.17	36.05	53.98	-17.93
4824.00	Peak	V	333	13	-68.22	6.17	44.95	73.98	-29.03
12060.00	Avg	V	-	-	-81.82	15.36	40.54	53.98	-13.44
12060.00	Peak	V	-	-	-70.41	15.36	51.95	73.98	-22.03

Table 7-19. Radiated Measurements Antenna B

FCC ID: BCGA2603 IC: 579C-A2603	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 84 of 112	

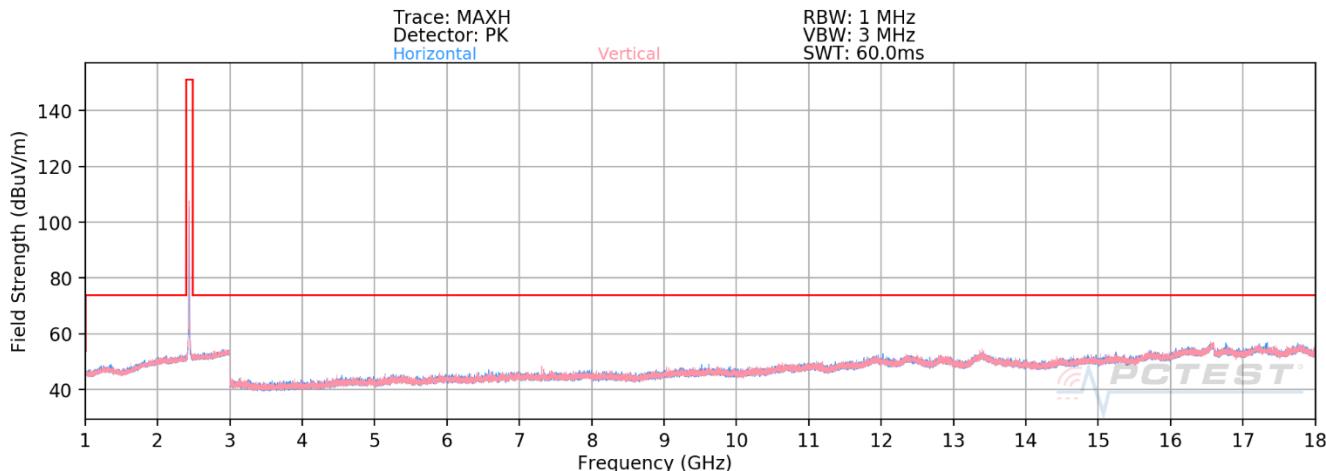


Plot 7-97. Radiated Spurious Emissions above 1GHz Antenna B (802.11b – Ch. 6)

Mode: 802.11b
 Data Rate: 1Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4874.00	Avg	V	333	326	-76.72	6.24	36.52	53.98	-17.46
4874.00	Peak	V	333	326	-67.43	6.24	45.81	73.98	-28.17
7311.00	Avg	V	297	44	-74.37	9.68	42.31	53.98	-11.67
7311.00	Peak	V	297	44	-66.31	9.68	50.37	73.98	-23.61
12185.00	Avg	V	-	-	-82.21	15.51	40.30	53.98	-13.68
12185.00	Peak	V	-	-	-70.57	15.51	51.94	73.98	-22.04

Table 7-20. Radiated Measurements Antenna B

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST Proud to be part of element			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device			

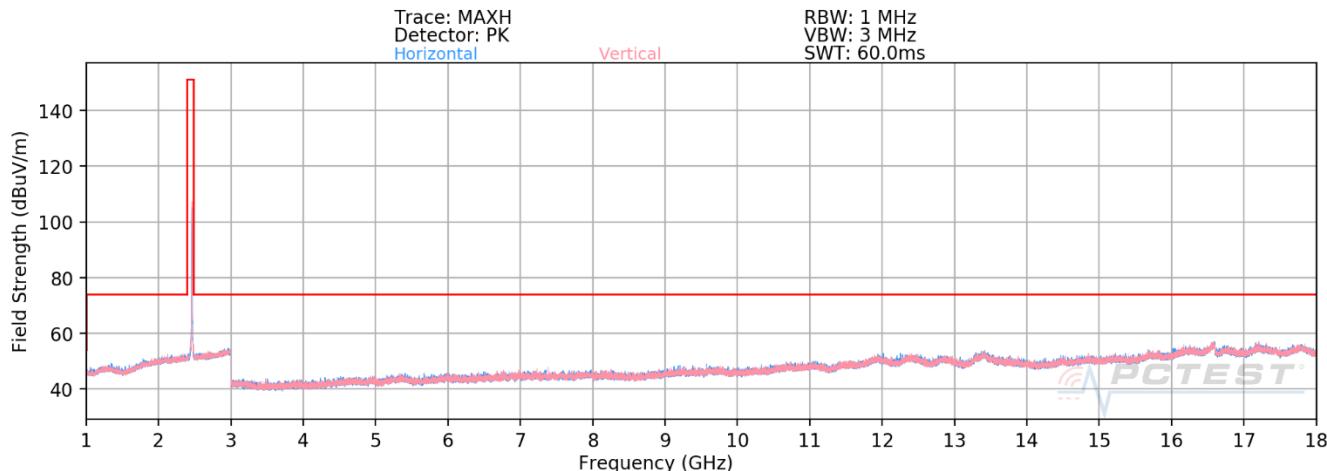

Plot 7-98. Radiated Spurious Emissions above 1GHz Antenna B (802.11b – Ch. 11)

Mode: 802.11b
Data Rate: 1Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4924.00	Avg	V	342	326	-75.03	6.85	38.82	53.98	-15.16
4924.00	Peak	V	342	326	-66.94	6.85	46.91	73.98	-27.07
7386.00	Avg	V	280	30	-74.33	9.90	42.57	53.98	-11.41
7386.00	Peak	V	280	30	-66.86	9.90	50.04	73.98	-23.94
12310.00	Avg	V	-	-	-82.49	15.82	40.33	53.98	-13.65
12310.00	Peak	V	-	-	-71.08	15.82	51.74	73.98	-22.24

Table 7-21. Radiated Measurements Antenna B

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 86 of 112

7.7.3 CDD Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

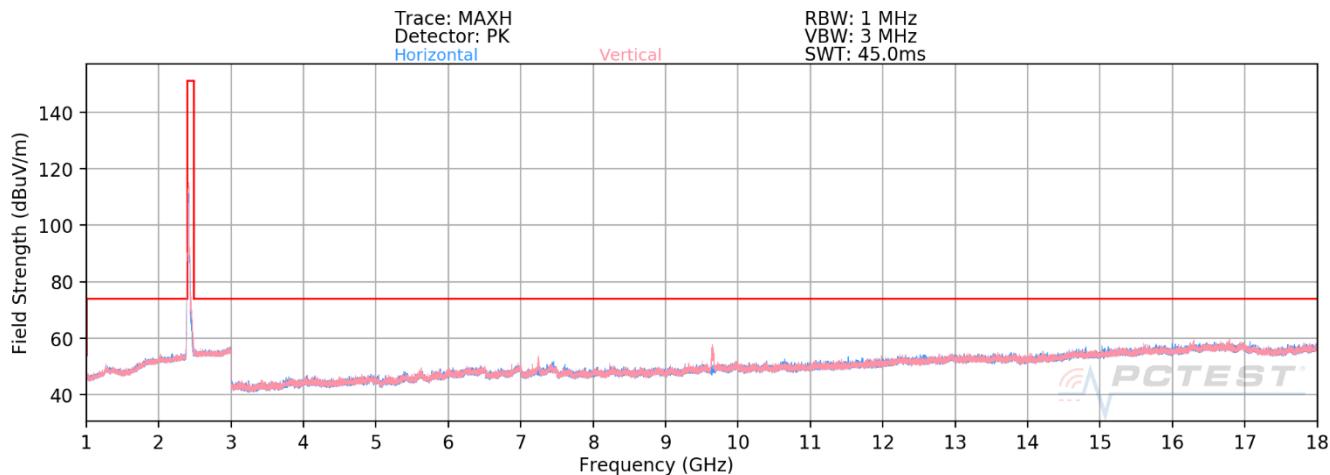

Plot 7-99. Radiated Spurious Emissions above 1GHz CDD (802.11n – Ch. 1)


Mode: 802.11n
 Data Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4824.00	Avg	V	-	-	-80.68	8.01	34.33	53.98	-19.65
4824.00	Peak	V	-	-	-69.40	8.01	45.61	73.98	-28.37
12060.00	Avg	V	-	-	-84.46	17.60	40.14	53.98	-13.84
12060.00	Peak	V	-	-	-72.77	17.60	51.83	73.98	-22.15


Table 7-22. Radiated Measurements CDD

FCC ID: BCGA2603 IC: 579C-A2603	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 87 of 112	

Trace: MAXH
Detector: PK
Horizontal Vertical
RBW: 1 MHz
VBW: 3 MHz
SWT: 45.0ms

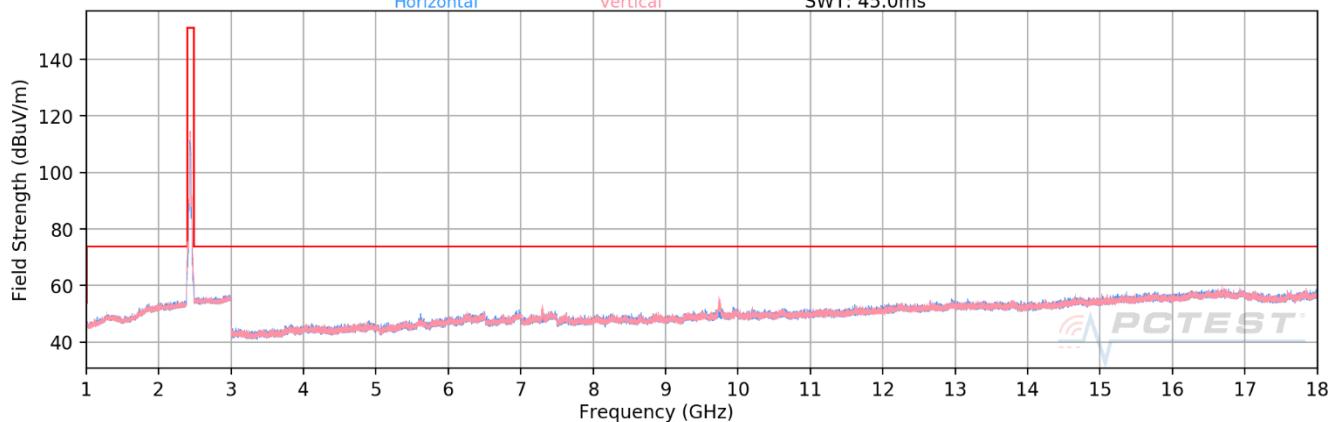


Plot 7-100. Radiated Spurious Emissions above 1GHz CDD (802.11n – Ch. 6)

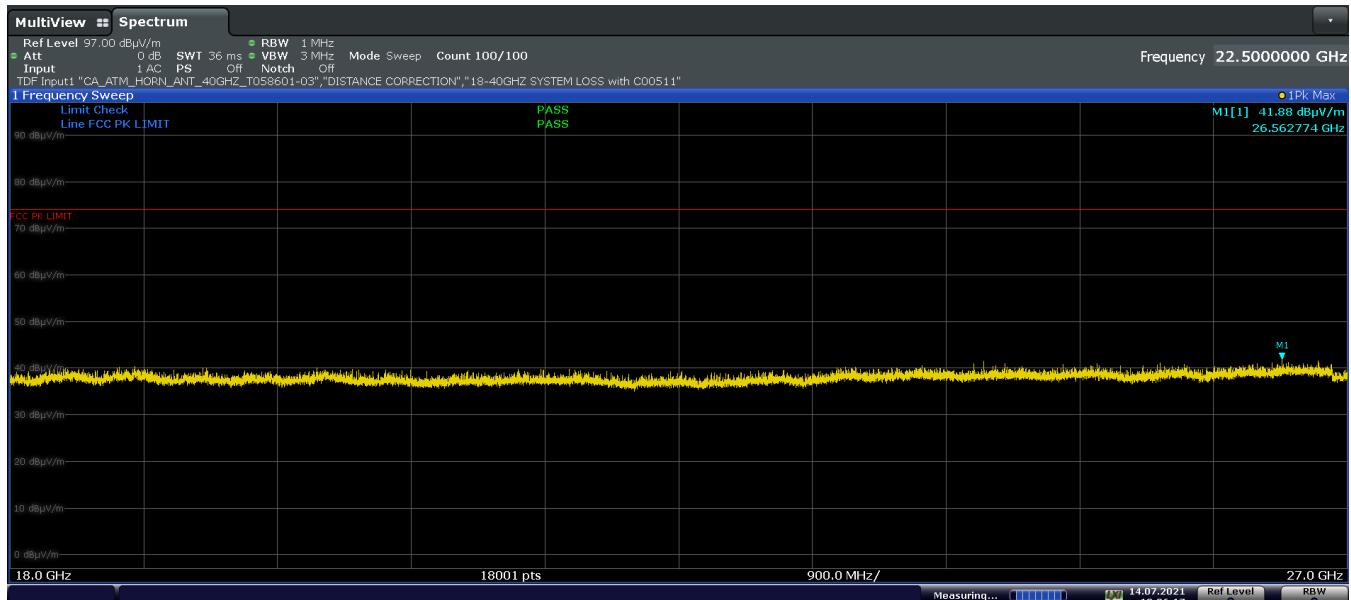

Plot 7-101. Radiated Spurious Emissions above 18GHz CDD (802.11n – Ch.6, Pol H)

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 88 of 112

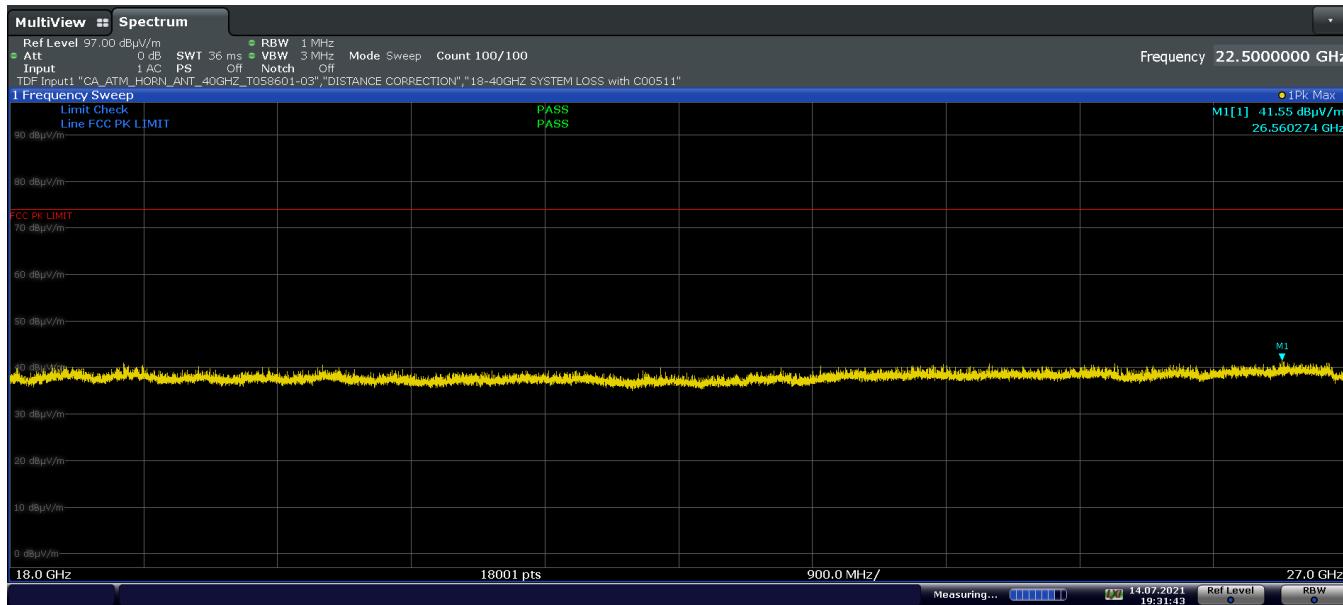


Plot 7-102. Radiated Spurious Emissions above 18GHz CDD (802.11n – Ch.6, Pol V)

Mode: 802.11n
 Data Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	V	-	-	-81.12	8.23	34.11	53.98	-19.87
4874.00	Peak	V	-	-	-69.43	8.23	45.80	73.98	-28.18
7311.00	Avg	V	273	69	-74.38	11.25	43.87	53.98	-10.11
7311.00	Peak	V	273	69	-62.02	11.25	56.23	73.98	-17.75
12185.00	Avg	V	-	-	-83.95	17.33	40.38	53.98	-13.60
12185.00	Peak	V	-	-	-72.81	17.33	51.52	73.98	-22.46

Table 7-23. Radiated Measurements CDD

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST[®] <small>Proud to be part of element</small>			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device			

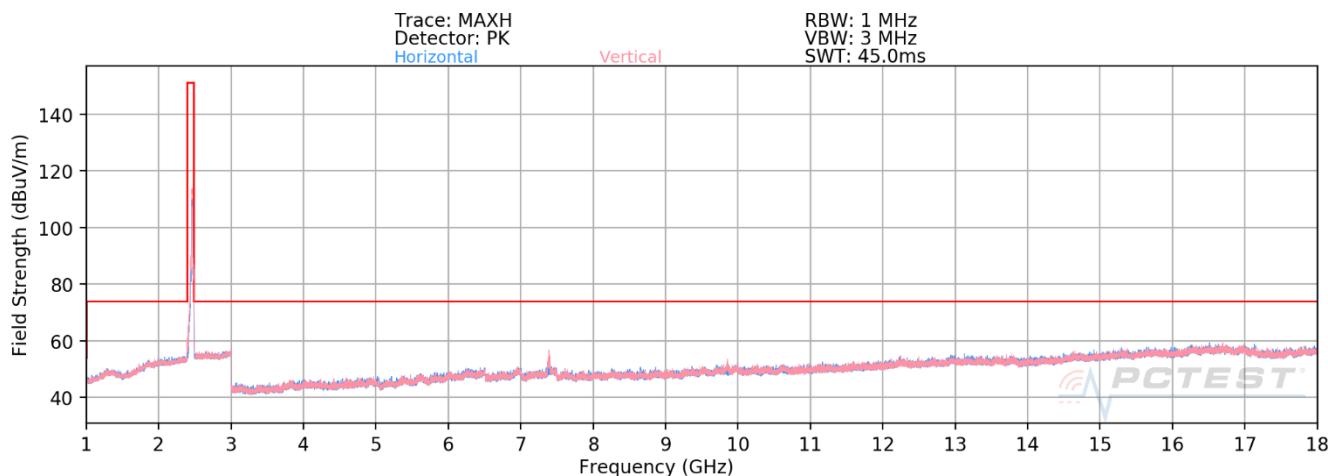

Plot 7-103. Radiated Spurious Emissions above 1GHz CDD (802.11n – Ch. 11)

Mode: 802.11n
 Data Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4924.00	Avg	V	-	-	-81.42	9.21	34.79	53.98	-19.19
4924.00	Peak	V	-	-	-70.17	9.21	46.04	73.98	-27.94
7386.00	Avg	V	261	69	-72.69	12.27	46.58	53.98	-7.40
7386.00	Peak	V	261	69	-60.81	12.27	58.46	73.98	-15.52
12310.00	Avg	V	-	-	-84.16	18.03	40.87	53.98	-13.11
12310.00	Peak	V	-	-	-72.78	18.03	52.25	73.98	-21.73


Table 7-24. Radiated Measurements CDD

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST[®] <small>Proud to be part of element</small>			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device			

7.7.4 Antenna A Radiated Restricted Band Edge Measurements


§15.205 §15.209; RSS-Gen [8.9]

Mode: 802.11b
 Data Rate: 11Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

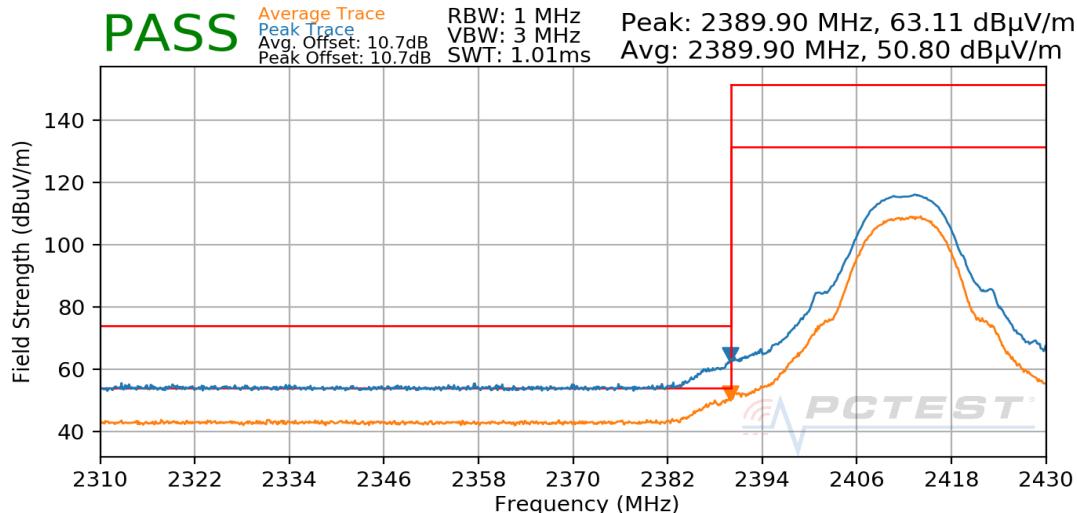

Plot 7-104. Radiated Restricted Lower Band Edge Measurement Antenna A


Mode: 802.11b
 Data Rate: 11Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

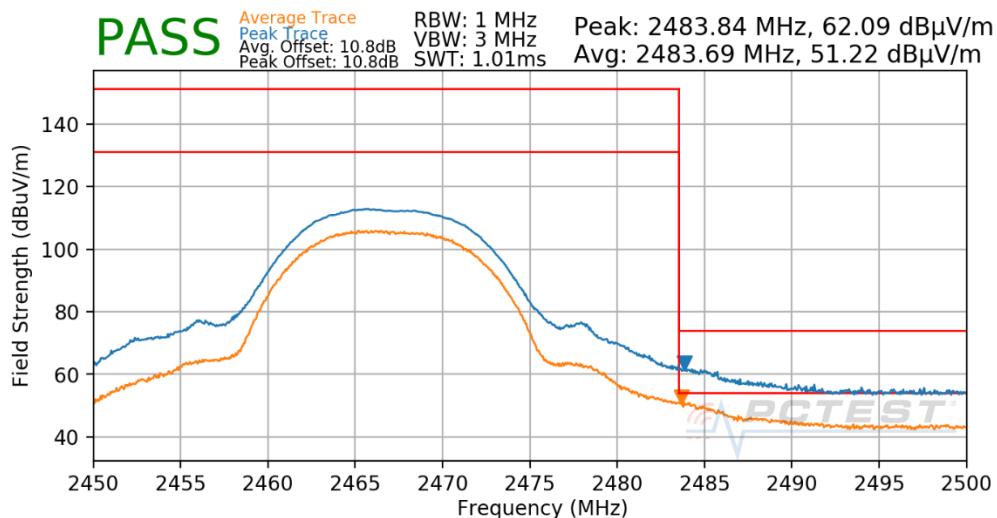

Plot 7-105. Radiated Restricted Upper Band Edge Measurement Antenna A


FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 - 07/23/2021	EUT Type: Tablet Device	Page 91 of 112

Mode: 802.11b
 Data Rate: 11Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2472MHz
 Channel: 13

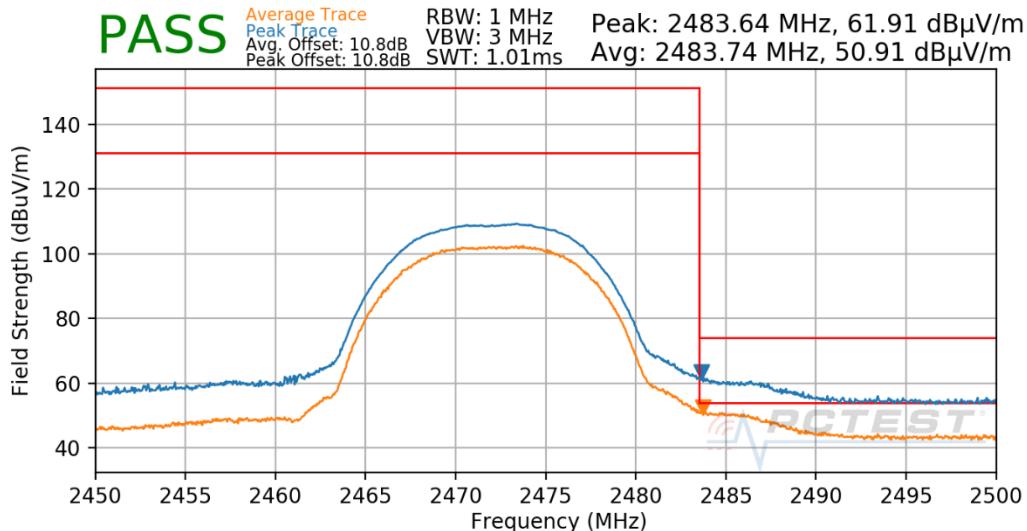


Plot 7-106. Radiated Restricted Upper Band Edge Measurement Antenna A


Mode: 802.11n
 Data Rate: MCS7
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

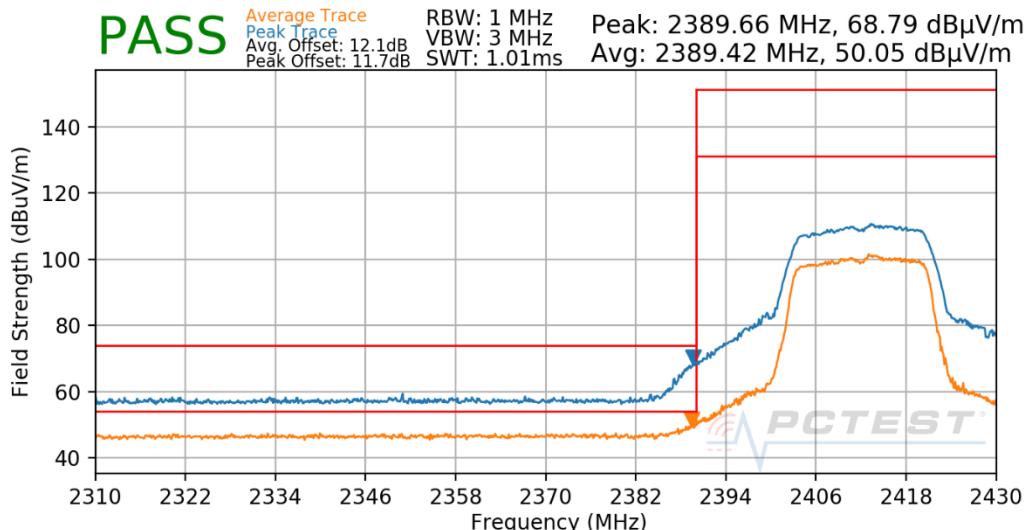

Plot 7-107. Radiated Restricted Lower Band Edge Measurement Antenna A


FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 - 07/23/2021	EUT Type: Tablet Device	Page 92 of 112	

Mode: 802.11n
 Data Rate: MCS7
 Distance of Measurements: 3 Meters
 Operating Frequency: 2417MHz
 Channel: 2

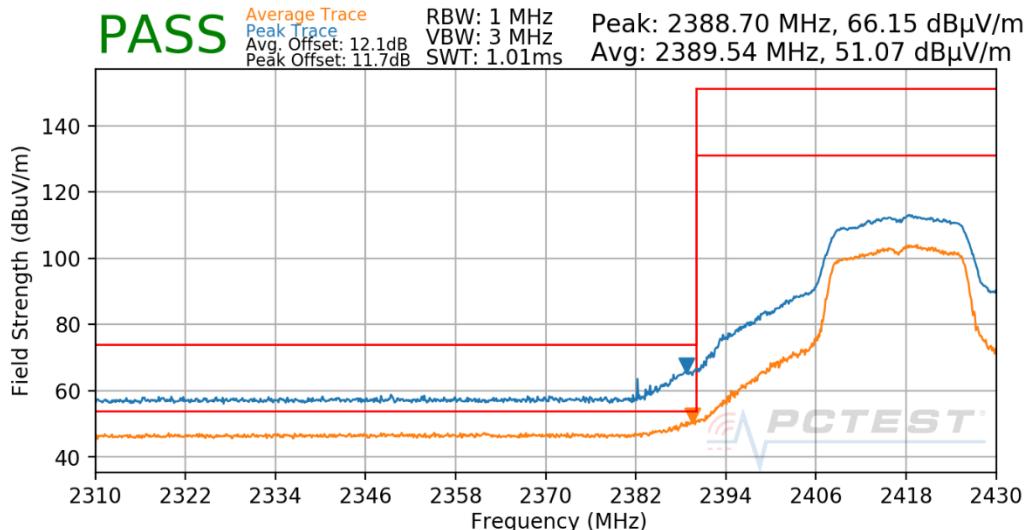

Plot 7-108. Radiated Restricted Lower Band Edge Measurement Antenna A


Mode: 802.11n
 Data Rate: MCS7
 Distance of Measurements: 3 Meters
 Operating Frequency: 2457MHz
 Channel: 10

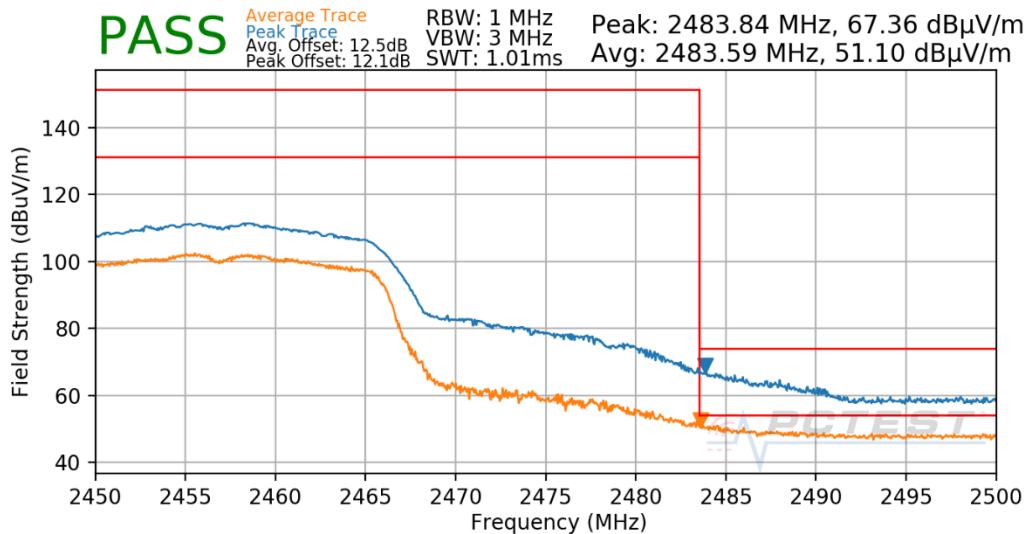

Plot 7-109. Radiated Restricted Upper Band Edge Measurement Antenna A


FCC ID: BCGA2603 IC: 579C-A2603	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 - 07/23/2021	EUT Type: Tablet Device	Page 93 of 112	

Mode: 802.11n
 Data Rate: MCS7
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

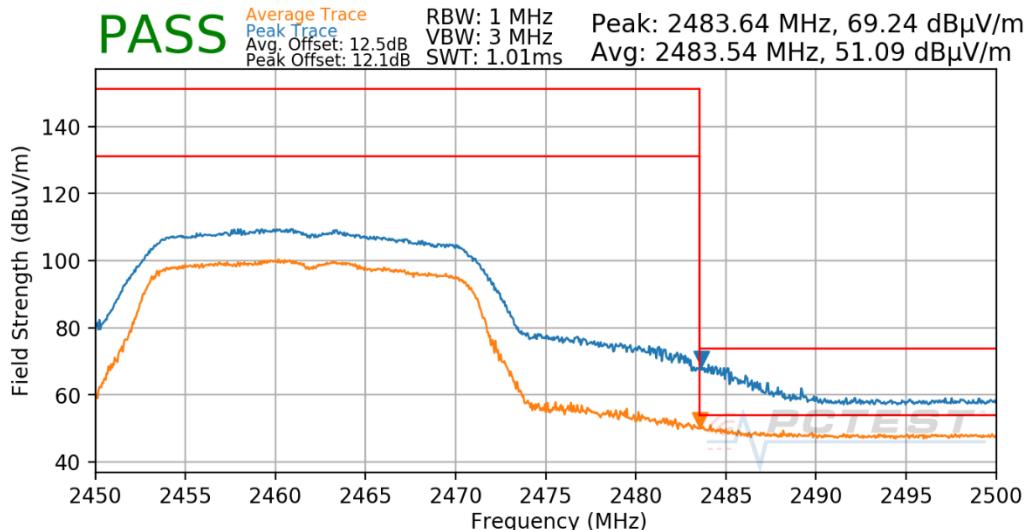

Plot 7-110. Radiated Restricted Upper Band Edge Measurement Antenna A


Mode: 802.11n
 Data Rate: MCS7
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

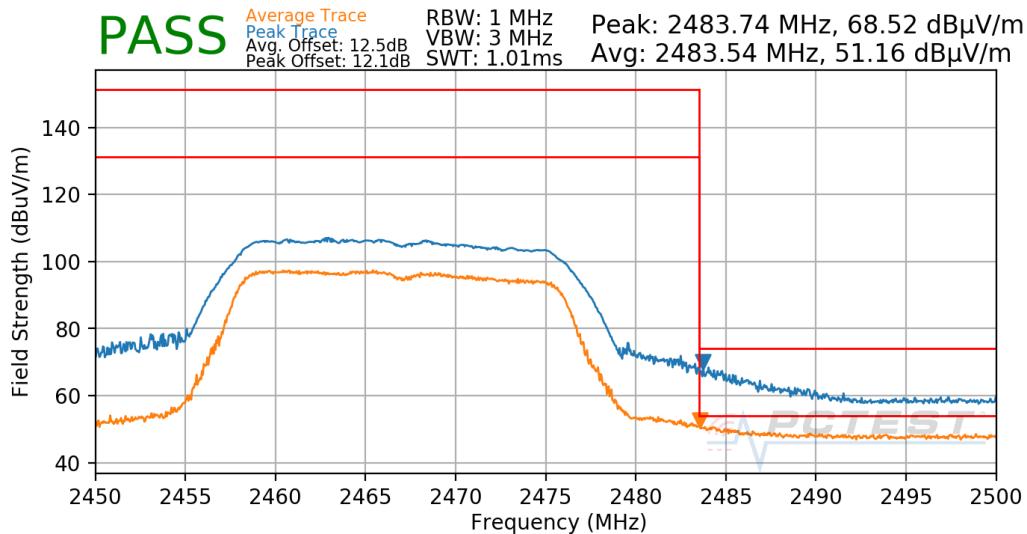

Plot 7-111. Radiated Restricted Upper Band Edge Measurement Antenna A

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 - 07/23/2021	EUT Type: Tablet Device	Page 94 of 112

Mode: 802.11n
 Data Rate: MCS7
 Distance of Measurements: 3 Meters
 Operating Frequency: 2472MHz
 Channel: 13

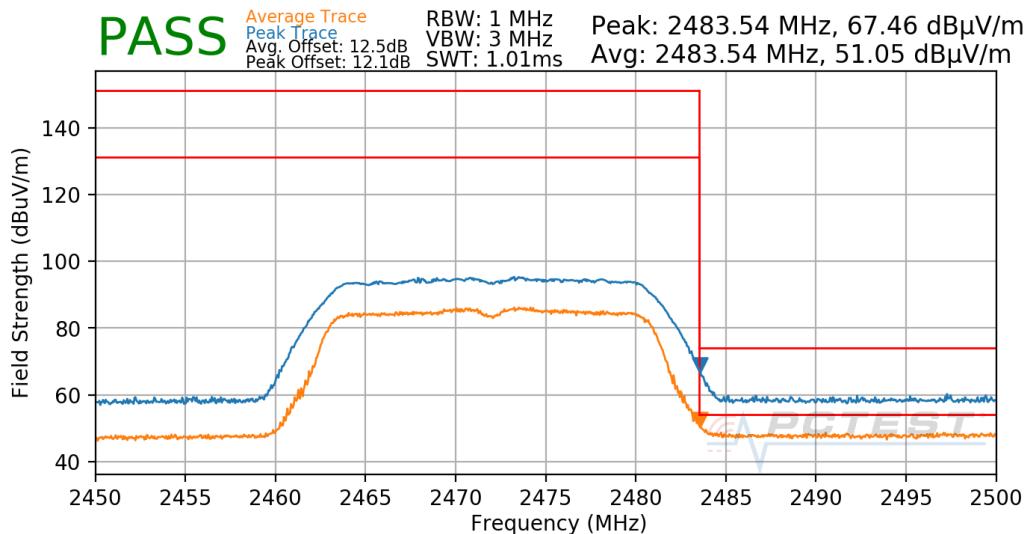


Plot 7-112. Radiated Restricted Upper Band Edge Measurement Antenna A

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 95 of 112

7.7.5 Antenna B Radiated Restricted Band Edge Measurements


§15.205 §15.209; RSS-Gen [8.9]

Mode: 802.11b
 Data Rate: 11Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

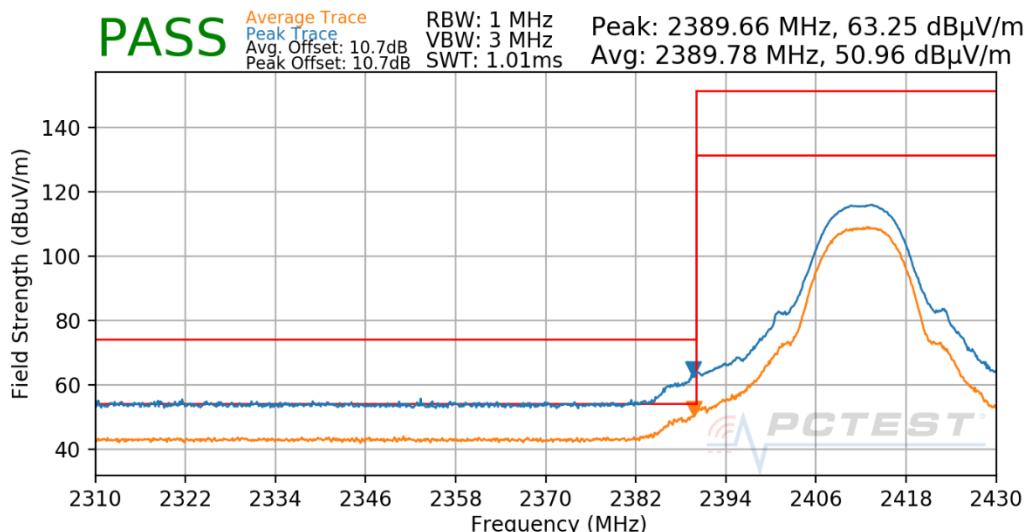

Plot 7-113. Radiated Restricted Lower Band Edge Measurement Antenna B


Mode: 802.11b
 Data Rate: 11Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

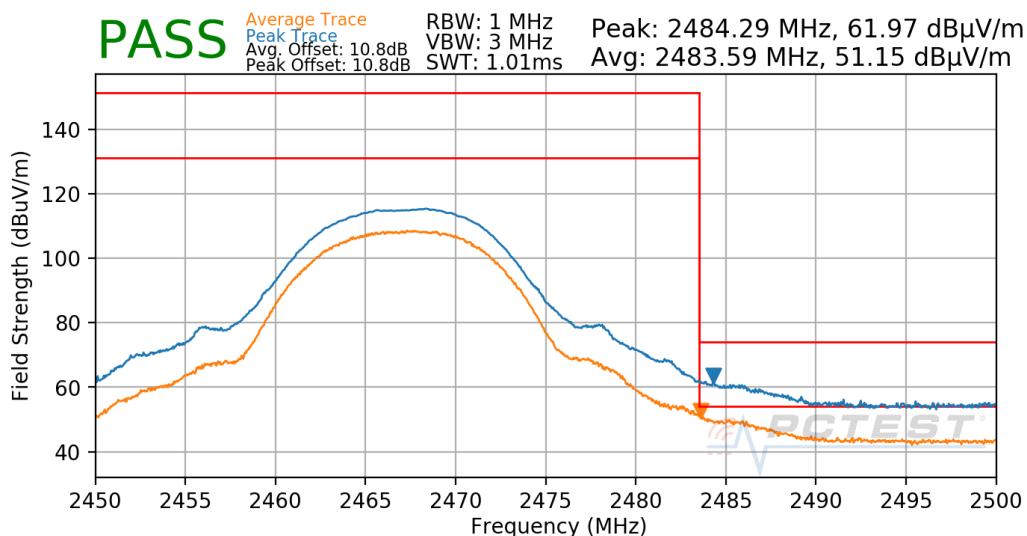

Plot 7-114. Radiated Restricted Upper Band Edge Measurement Antenna B


FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 - 07/23/2021	EUT Type: Tablet Device	Page 96 of 112

Mode: 802.11b
 Data Rate: 11Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2472MHz
 Channel: 13

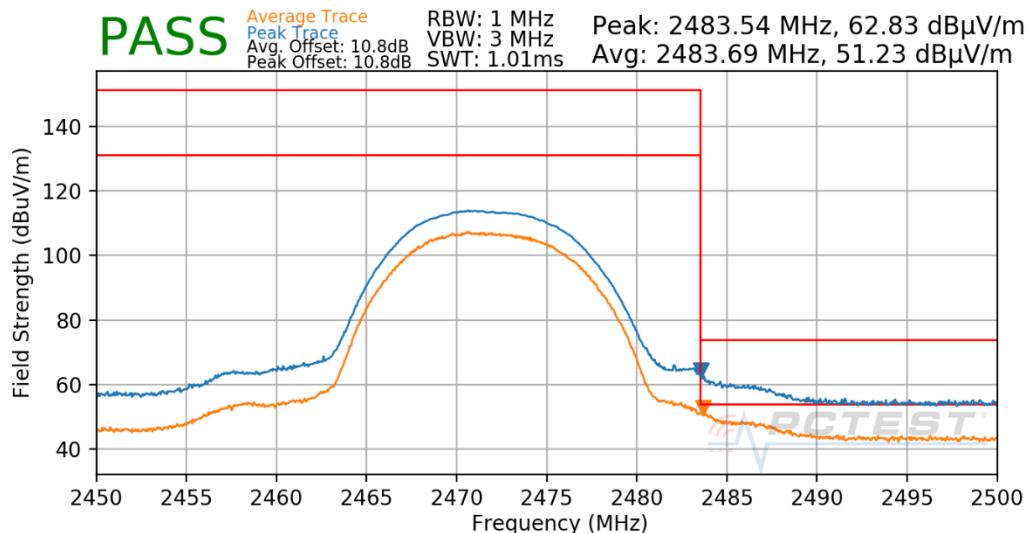

Plot 7-115. Radiated Restricted Upper Band Edge Measurement Antenna B


Mode: 802.11n
 Data Rate: MCS7
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

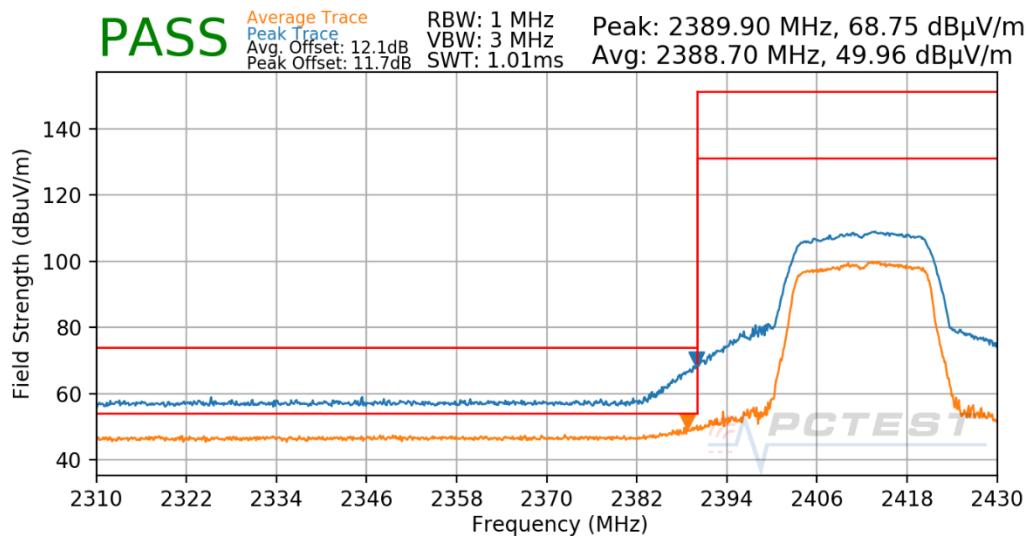

Plot 7-116. Radiated Restricted Lower Band Edge Measurement Antenna B


FCC ID: BCGA2603 IC: 579C-A2603	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 - 07/23/2021	EUT Type: Tablet Device	Page 97 of 112	

Mode: 802.11n
 Data Rate: MCS7
 Distance of Measurements: 3 Meters
 Operating Frequency: 2417MHz
 Channel: 2

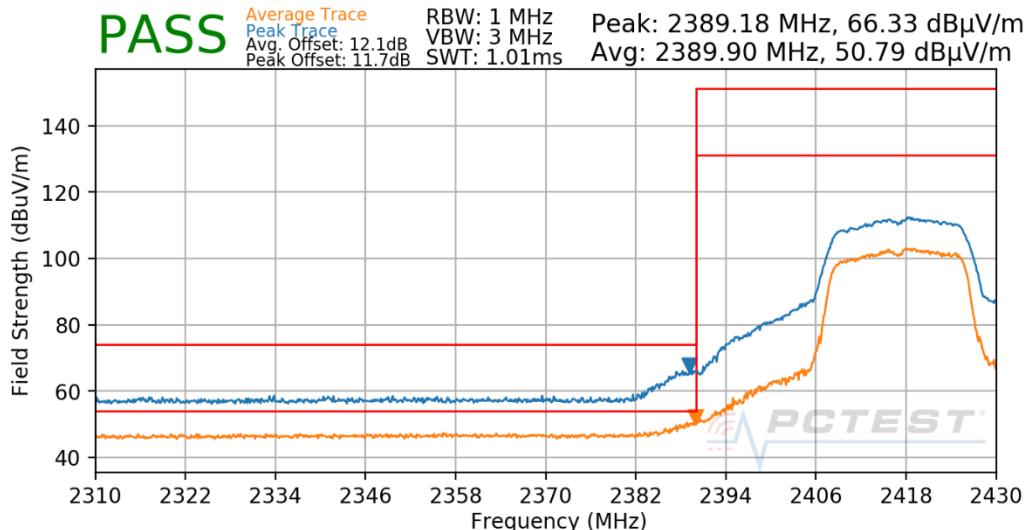

Plot 7-117. Radiated Restricted Lower Band Edge Measurement Antenna B


Mode: 802.11n
 Data Rate: MCS7
 Distance of Measurements: 3 Meters
 Operating Frequency: 2457MHz
 Channel: 10

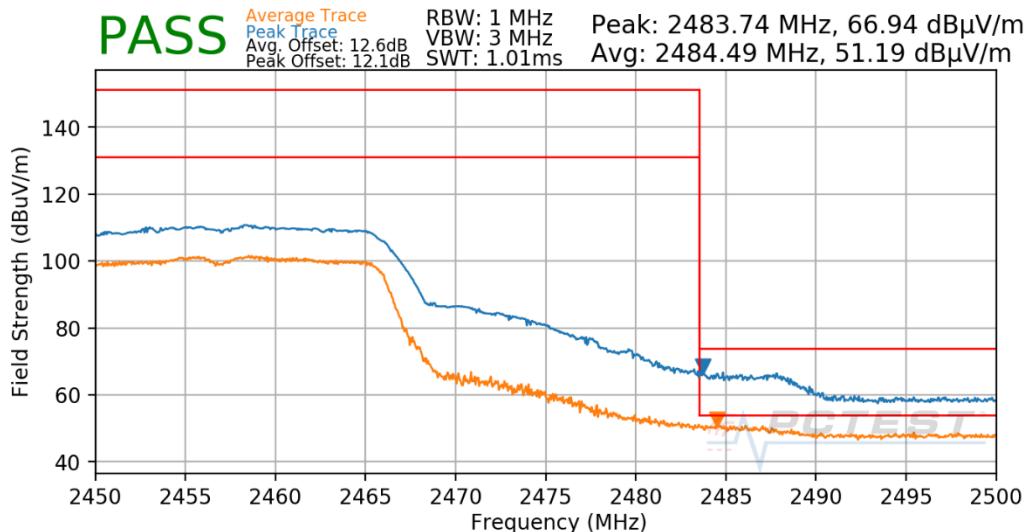

Plot 7-118. Radiated Restricted Upper Band Edge Measurement Antenna B


FCC ID: BCGA2603 IC: 579C-A2603	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 - 07/23/2021	EUT Type: Tablet Device	Page 98 of 112	

Mode: 802.11n
 Data Rate: MCS7
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

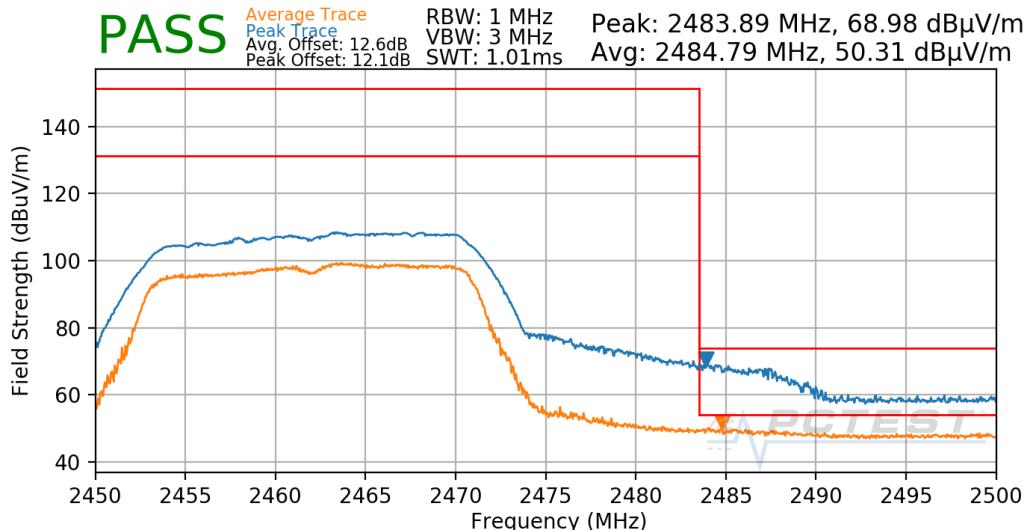

Plot 7-119. Radiated Restricted Upper Band Edge Measurement Antenna B


Mode: 802.11n
 Data Rate: MCS7
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

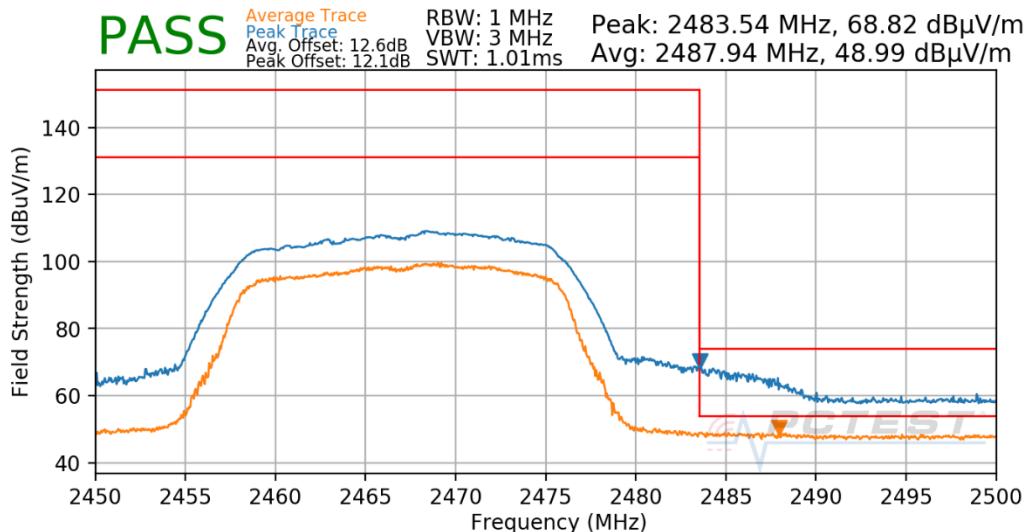

Plot 7-120. Radiated Restricted Upper Band Edge Measurement Antenna B

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 - 07/23/2021	EUT Type: Tablet Device	Page 99 of 112

Mode: 802.11n
 Data Rate: MCS7
 Distance of Measurements: 3 Meters
 Operating Frequency: 2472MHz
 Channel: 13

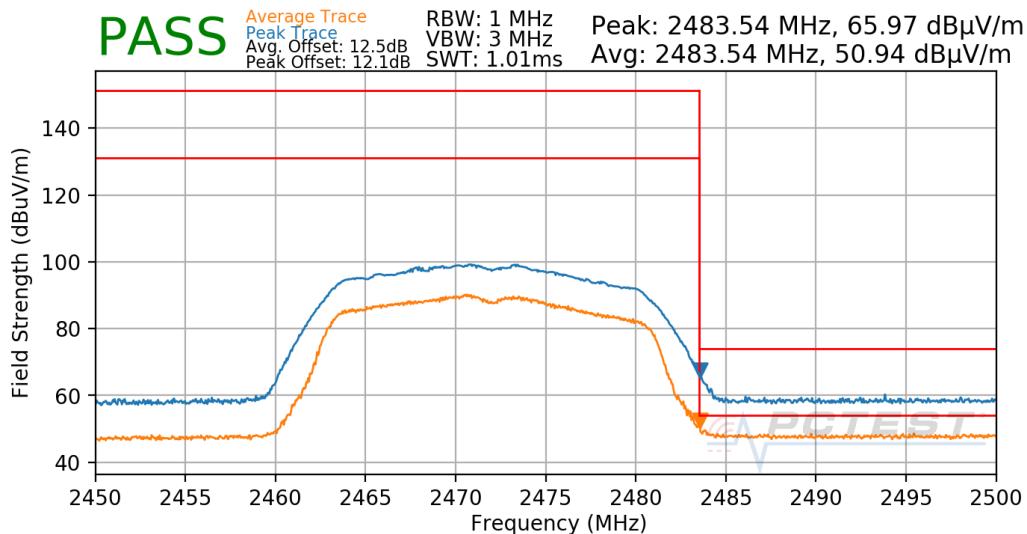


Plot 7-121. Radiated Restricted Upper Band Edge Measurement Antenna B

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 100 of 112

7.7.6 CDD Radiated Restricted Band Edge Measurements


§15.205 §15.209; RSS-Gen [8.9]

Mode: 802.11n
 Data Rate: MCS15
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

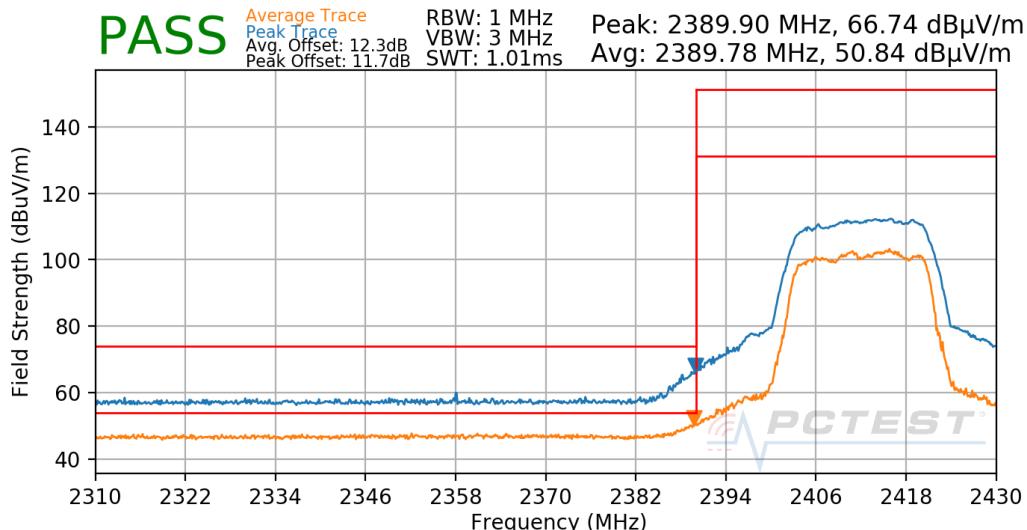

Plot 7-122. Radiated Restricted Lower Band Edge Measurement CDD


Mode: 802.11n
 Data Rate: MCS15
 Distance of Measurements: 3 Meters
 Operating Frequency: 2417MHz
 Channel: 2

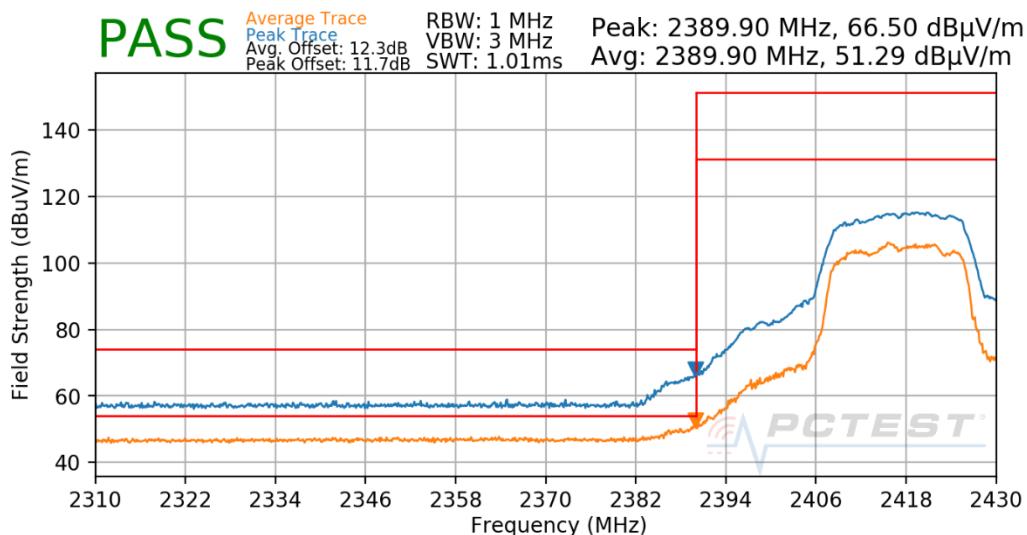

Plot 7-123. Radiated Restricted Lower Band Edge Measurement CDD


FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 - 07/23/2021	EUT Type: Tablet Device	Page 101 of 112	

Mode: 802.11n
 Data Rate: MCS15
 Distance of Measurements: 3 Meters
 Operating Frequency: 2457MHz
 Channel: 10

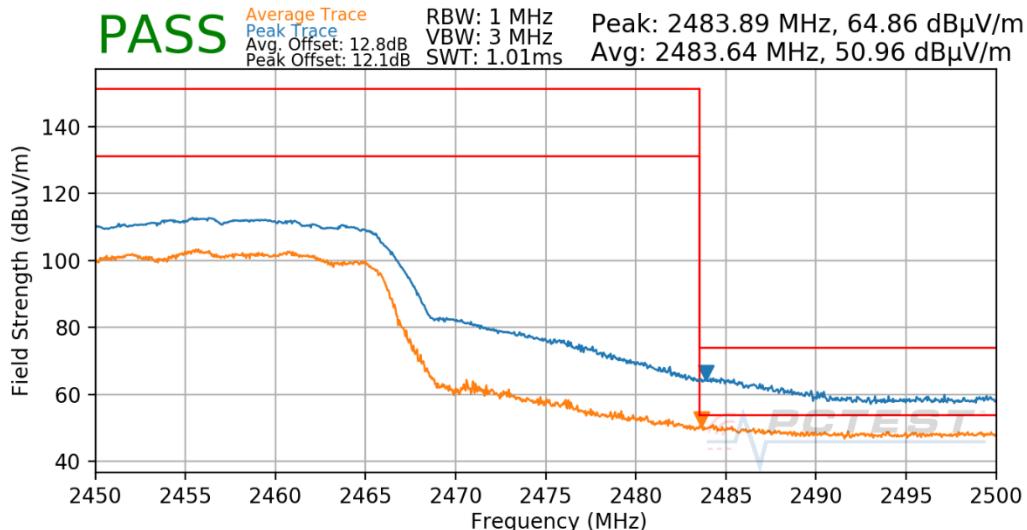

Plot 7-124. Radiated Restricted Upper Band Edge Measurement CDD


Mode: 802.11n
 Data Rate: MCS15
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

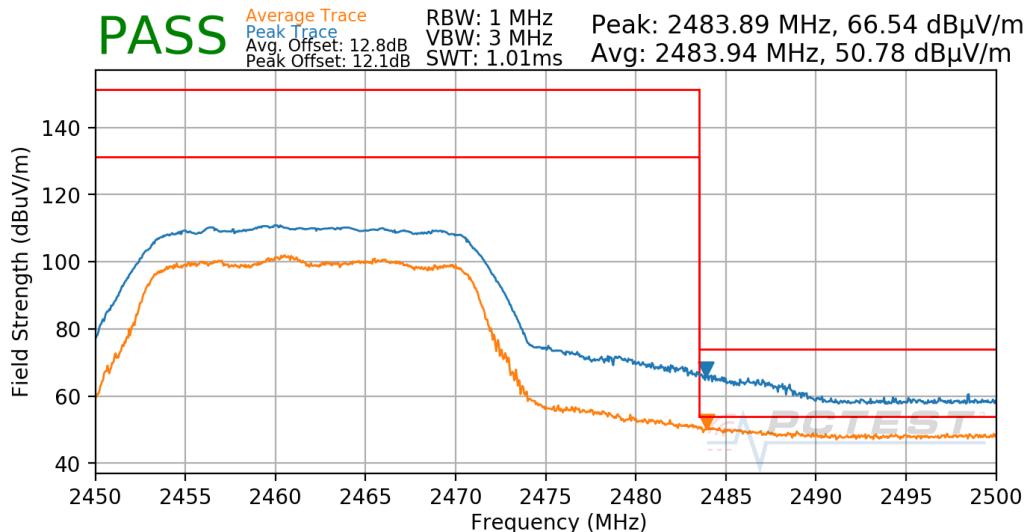

Plot 7-125. Radiated Restricted Upper Band Edge Measurement CDD


FCC ID: BCGA2603 IC: 579C-A2603	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 - 07/23/2021	EUT Type: Tablet Device	Page 102 of 112	

Mode: 802.11n
 Data Rate: MCS15
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

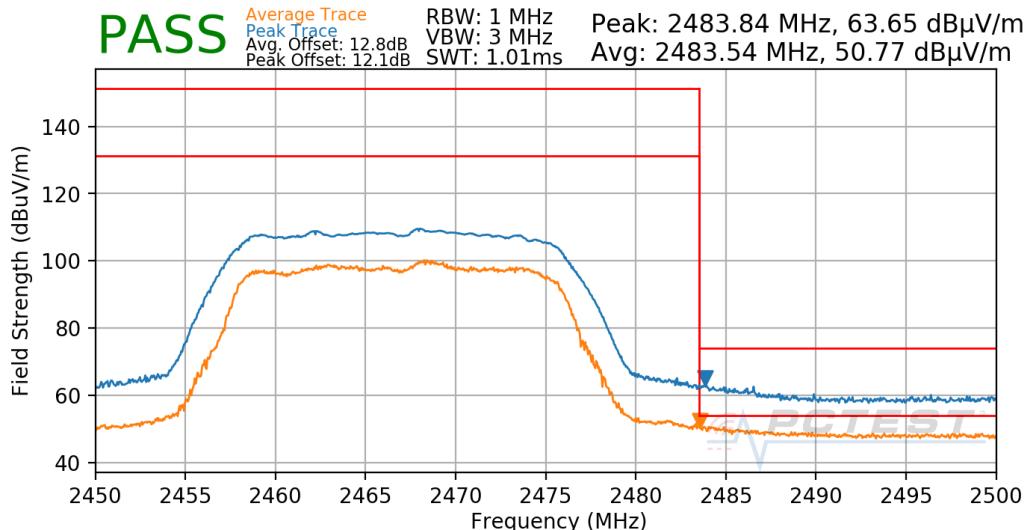

Plot 7-126. Radiated Restricted Upper Band Edge Measurement CDD

Mode: 802.11n
 Data Rate: MCS15
 Distance of Measurements: 3 Meters
 Operating Frequency: 2472MHz
 Channel: 13

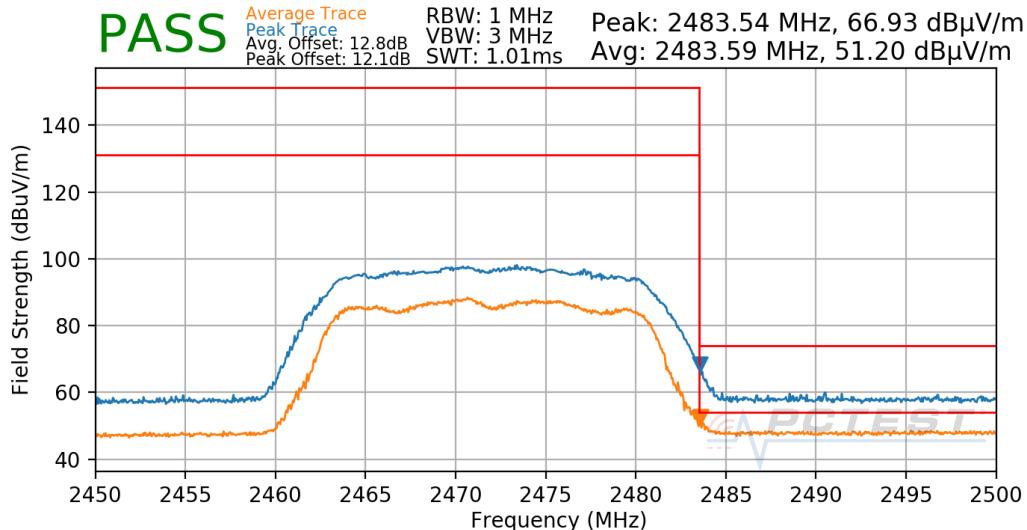

Plot 7-127. Radiated Restricted Upper Band Edge Measurement CDD

FCC ID: BCGA2603 IC: 579C-A2603	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 - 07/23/2021	EUT Type: Tablet Device		Page 103 of 112

7.8 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-25 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-25. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 104 of 112

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

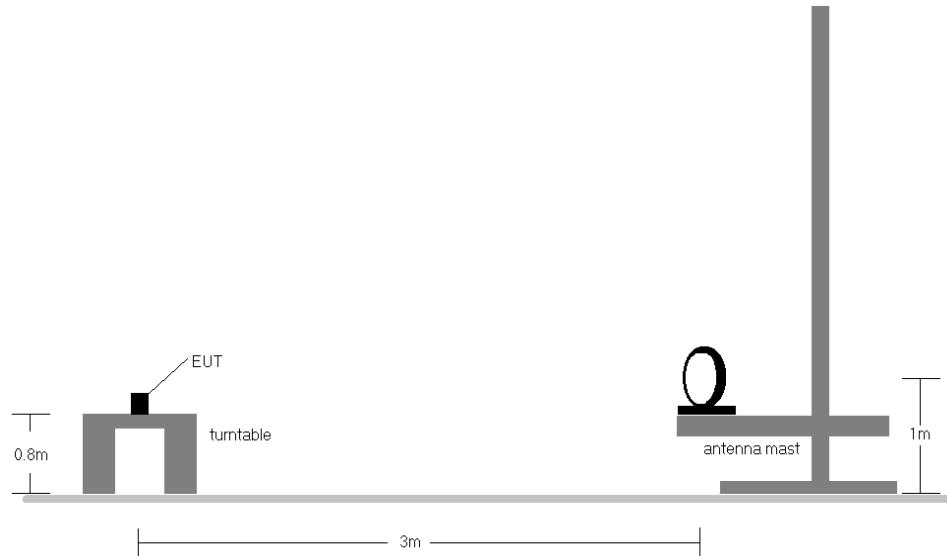


Figure 7-7. Radiated Test Setup < 30Mhz

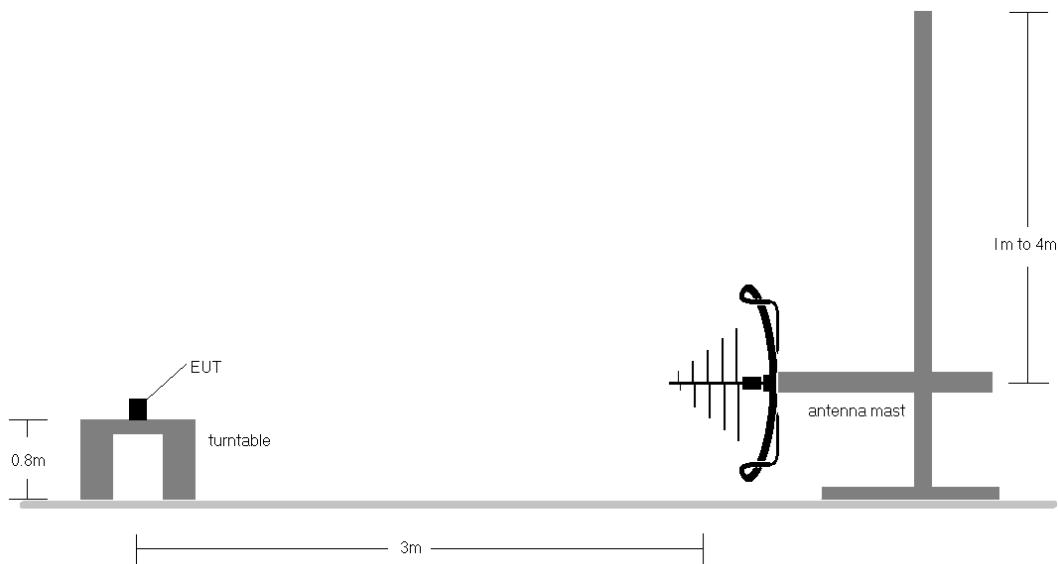


Figure 7-8. Radiated Test Setup < 1GHz

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 105 of 112

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen(8.10) are below the limit shown in Table 7-25.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
9. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
10. The unit was tested with all possible modes and only the highest emission is reported.
11. All antenna configurations were investigated and only the worst case is reported.

Sample Calculations


Determining Spurious Emissions Levels

- Field Strength Level $[\text{dB}_{\mu\text{V/m}}]$ = Analyzer Level $[\text{dBm}] + 107 + \text{AFCL} [\text{dB/m}]$
- AFCL $[\text{dB/m}]$ = Antenna Factor $[\text{dB/m}] + \text{Cable Loss} [\text{dB}] - \text{Preamplifier Gain} [\text{dB}]$
- Margin $[\text{dB}]$ = Field Strength Level $[\text{dB}_{\mu\text{V/m}}] - \text{Limit} [\text{dB}_{\mu\text{V/m}}]$

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST [®] Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 106 of 112

CDD Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

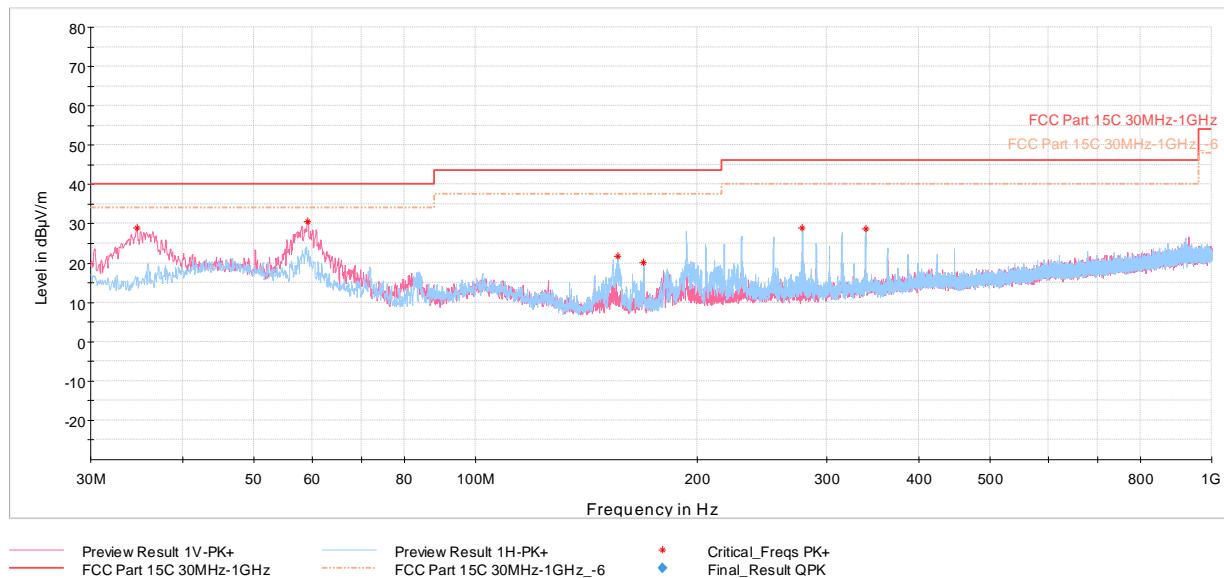

Plot 7-128. Radiated Spurious Emissions Below 1GHz CDD 11n Ch.11, with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
34.66	Max-Peak	V	100	84	-61.66	-16.30	29.04	40.00	-10.96
59.10	Max-Peak	V	100	121	-61.99	-14.53	30.48	40.00	-9.52
155.95	Max-Peak	H	100	311	-67.11	-18.21	21.68	43.52	-21.84
169.29	Max-Peak	H	250	149	-69.23	-17.59	20.18	43.52	-23.34
278.08	Max-Peak	H	100	334	-64.58	-13.42	29.00	46.02	-17.02
338.70	Max-Peak	H	100	0	-66.88	-11.46	28.66	46.02	-17.36

Table 7-26. Radiated Spurious Emissions Below 1GHz CDD 11n Ch.11, with AC/DC Adapter

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST[®] Proud to be part of element			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device			

7.9 AC Line-Conducted Emissions Measurement

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-27. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST[®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 108 of 112

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


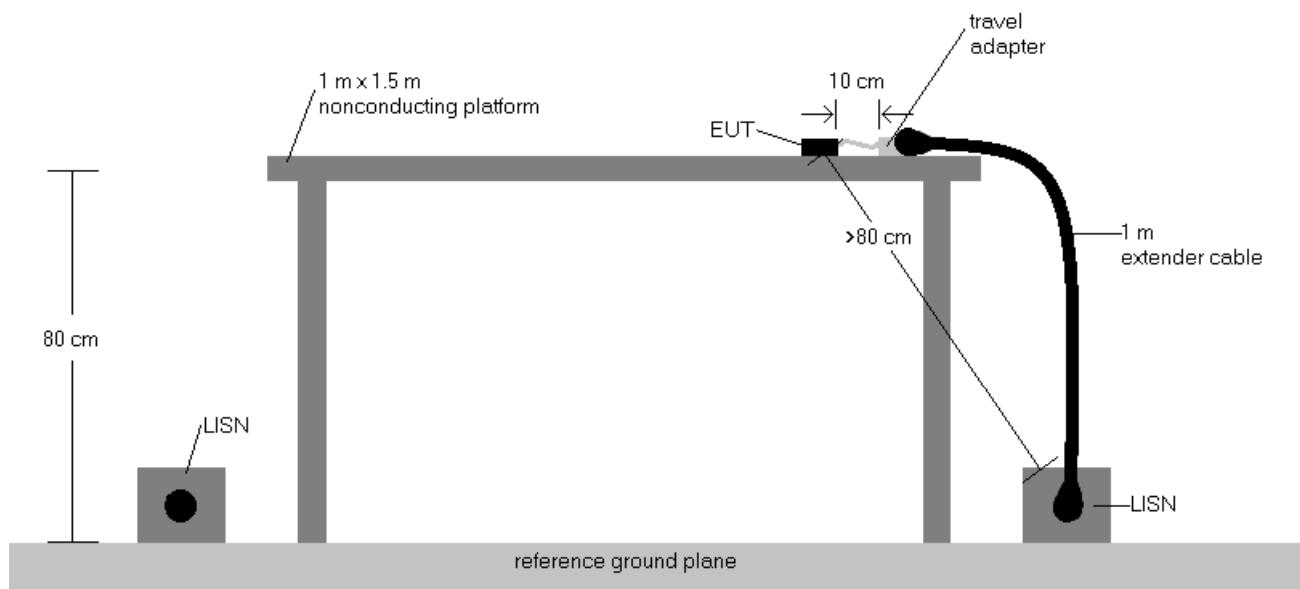


Figure 7-9. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dB μ V) = QP/AV Analyzer/Receiver Level (dB μ V) + Corr. (dB)
6. Margin (dB) = QP/AV Level (dB μ V) - QP/AV Limit (dB μ V)
7. Traces shown in plot are made using quasi peak and average detectors.
8. Deviations to the Specifications: None.
9. The unit was tested with all possible modes and only the highest emission is reported.

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 109 of 112

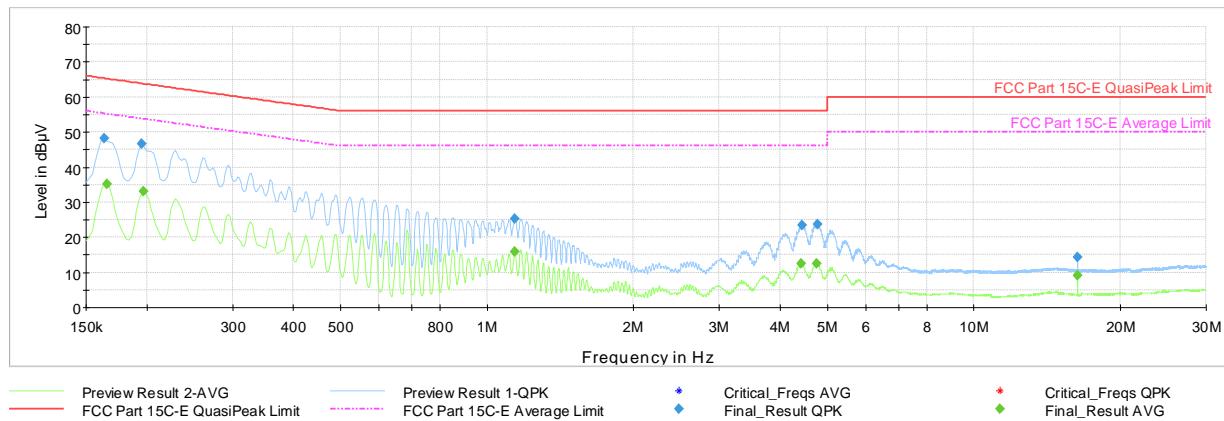


Plot 7-129. AC Line Conducted Plot with CDD 11n Ch.6 (L1, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dB μ V]	Average [dB μ V]	Limit [dB μ V]	Margin [dB]	Line	PE
0.164	FINAL	48.3	—	65.28	-16.98	L1	GND
0.166	FINAL	—	35.20	55.17	-19.97	L1	GND
0.195	FINAL	46.6	—	63.82	-17.23	L1	GND
0.197	FINAL	—	33.03	53.73	-20.70	L1	GND
1.140	FINAL	—	15.92	46.00	-30.08	L1	GND
1.140	FINAL	25.3	—	56.00	-30.74	L1	GND
4.425	FINAL	—	12.52	46.00	-33.48	L1	GND
4.430	FINAL	23.3	—	56.00	-32.67	L1	GND
4.751	FINAL	—	12.60	46.00	-33.40	L1	GND
4.776	FINAL	23.7	—	56.00	-32.28	L1	GND
16.323	FINAL	14.5	—	60.00	-45.55	L1	GND
16.323	FINAL	—	9.19	50.00	-40.81	L1	GND

Table 7-28. AC Line Conducted Data with CDD 11n Ch.6 (L1, with AC/DC Adapter)

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 110 of 112

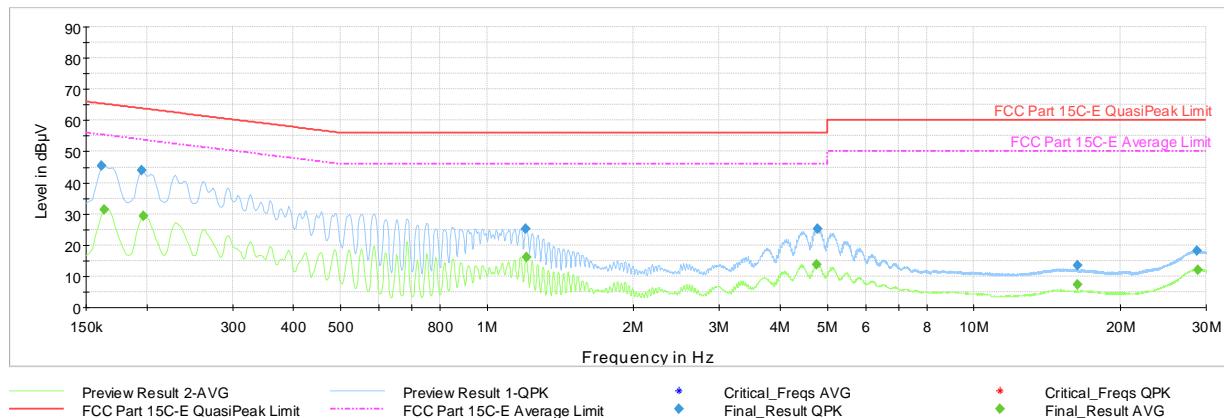

Plot 7-130. AC Line Conducted Plot with CDD 11n Ch.6 (N, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dB μ V]	Average [dB μ V]	Limit [dB μ V]	Margin [dB]	Line	PE
0.161	FINAL	45.3	—	65.40	-20.06	N	GND
0.164	FINAL	—	31.29	55.28	-24.00	N	GND
0.195	FINAL	44.0	—	63.82	-19.78	N	GND
0.197	FINAL	—	29.29	53.73	-24.44	N	GND
1.199	FINAL	25.2	—	56.00	-30.82	N	GND
1.203	FINAL	—	16.00	46.00	-30.00	N	GND
4.749	FINAL	—	13.65	46.00	-32.35	N	GND
4.772	FINAL	25.2	—	56.00	-30.85	N	GND
16.341	FINAL	—	7.29	50.00	-42.71	N	GND
16.341	FINAL	13.6	—	60.00	-46.41	N	GND
28.705	FINAL	18.0	—	60.00	-41.96	N	GND
28.797	FINAL	—	11.96	50.00	-38.04	N	GND

Table 7-29. AC Line Conducted Data with CDD 11n Ch.6 (N, with AC/DC Adapter)

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 111 of 112

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device** **FCC ID: BCGA2603, IC: 579C-A2603** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 112 of 112