


PASS

Average Trace
Peak Trace
Avg. Offset: 18.1dB
Peak Offset: 17.1dB

RBW: 1 MHz
VBW: 3 MHz
SWT: 1.01ms

Peak: 5351.32 MHz, 62.18 dB μ V/m
Avg: 5357.91 MHz, 50.98 dB μ V/m

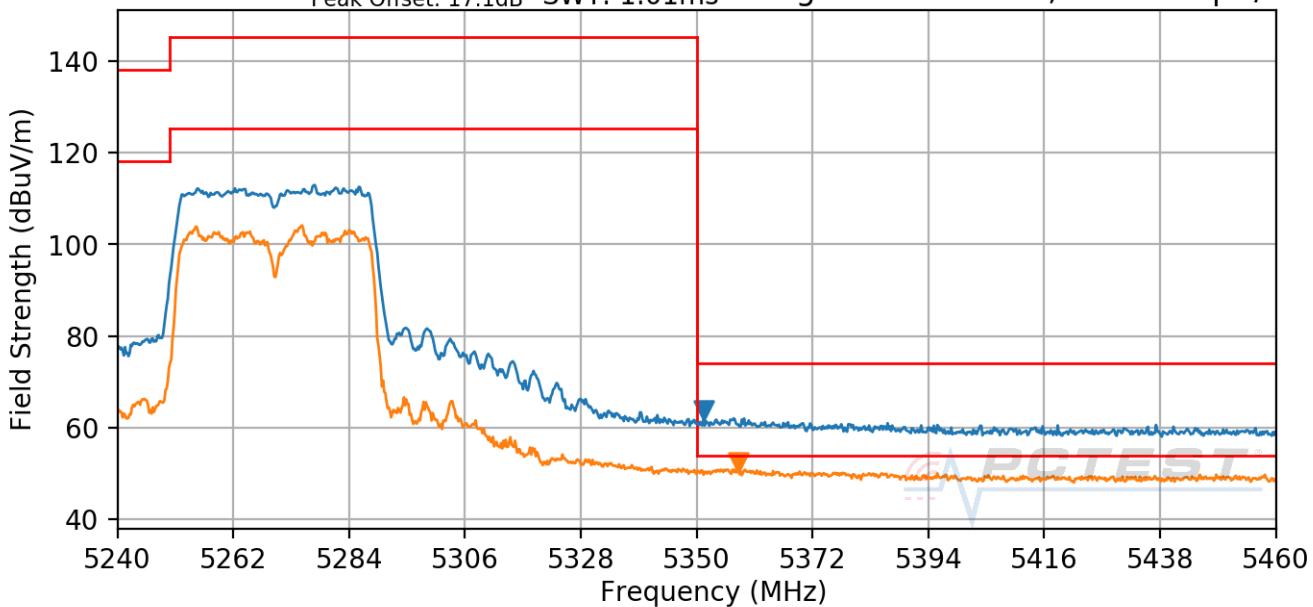


Plot 7-198. CDD (Pk & Avg, Ch.54, 802.11n, MCS15)

PASS

Average Trace
Peak Trace
Avg. Offset: 18.1dB
Peak Offset: 17.1dB

RBW: 1 MHz
VBW: 3 MHz
SWT: 1.01ms

Peak: 5351.98 MHz, 62.92 dB μ V/m
Avg: 5354.84 MHz, 51.11 dB μ V/m

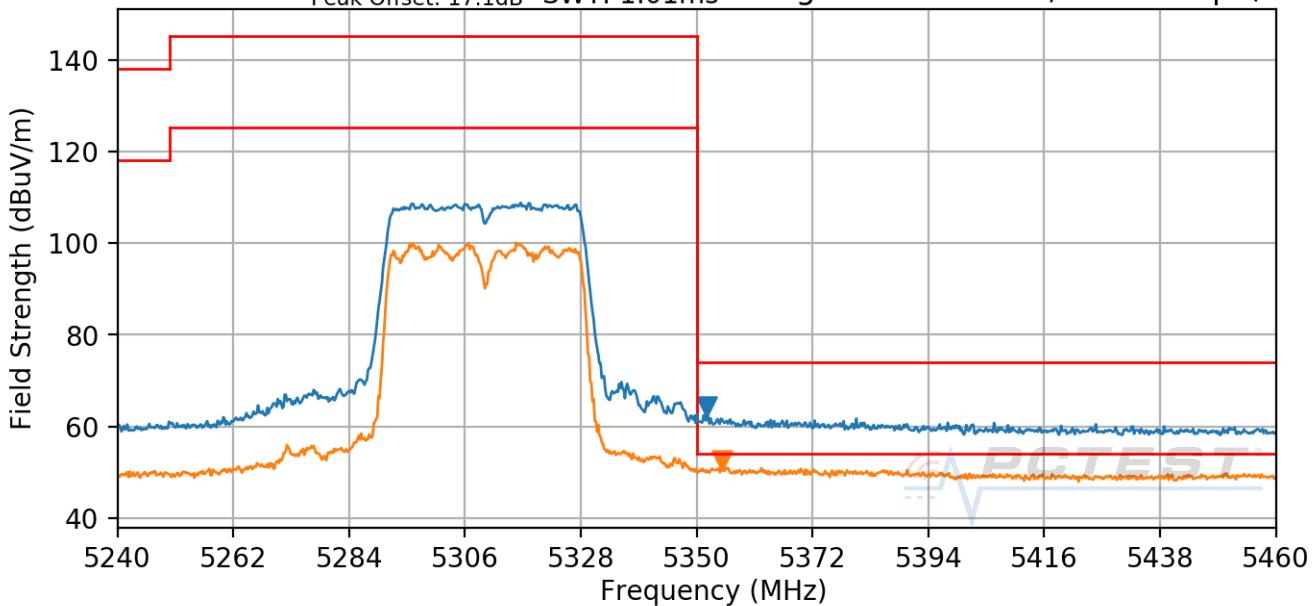

Plot 7-199. CDD (Pk & Avg, Ch.62, 802.11n, MCS15)


FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 138 of 156	

PASS

Average Trace
Peak Trace
Avg. Offset: 18.8dB
Peak Offset: 17.6dB

RBW: 1 MHz
VBW: 3 MHz
SWT: 1.01ms

Peak: 5464.31 MHz, 63.03 dB μ V/m
Avg: 5453.97 MHz, 51.07 dB μ V/m

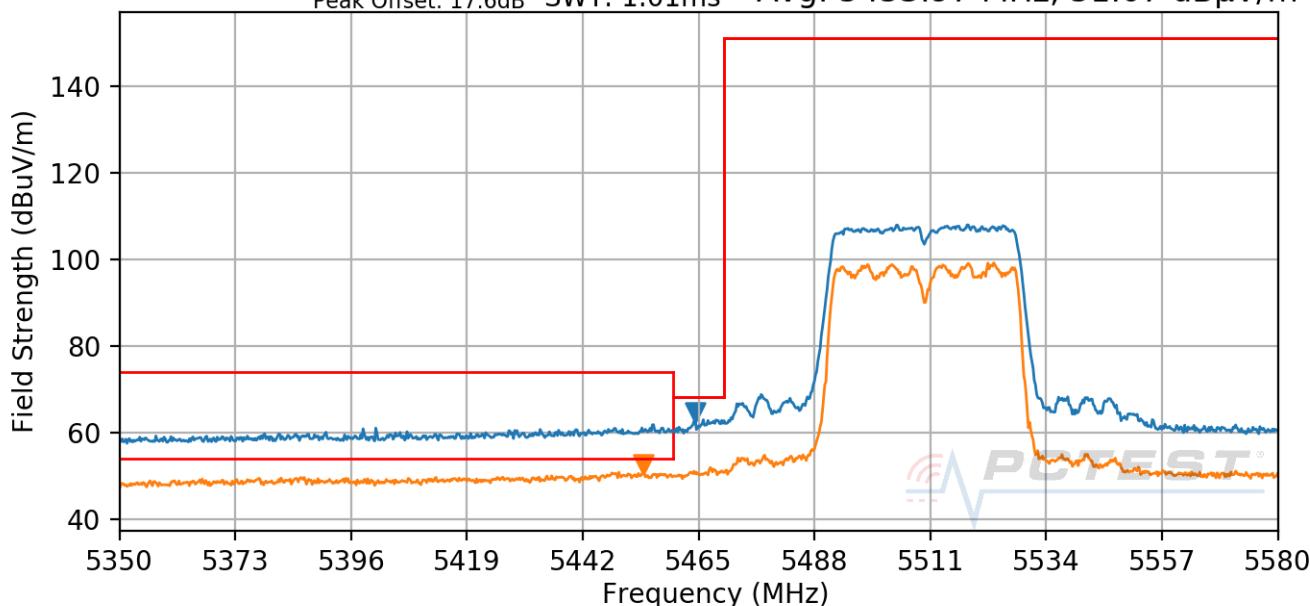


PASS

Average Trace
Peak Trace
Avg. Offset: 18.7dB
Peak Offset: 17.5dB

RBW: 1 MHz
VBW: 3 MHz
SWT: 1.01ms

Peak: 5468.56 MHz, 62.96 dB μ V/m
Avg: 5457.29 MHz, 50.93 dB μ V/m

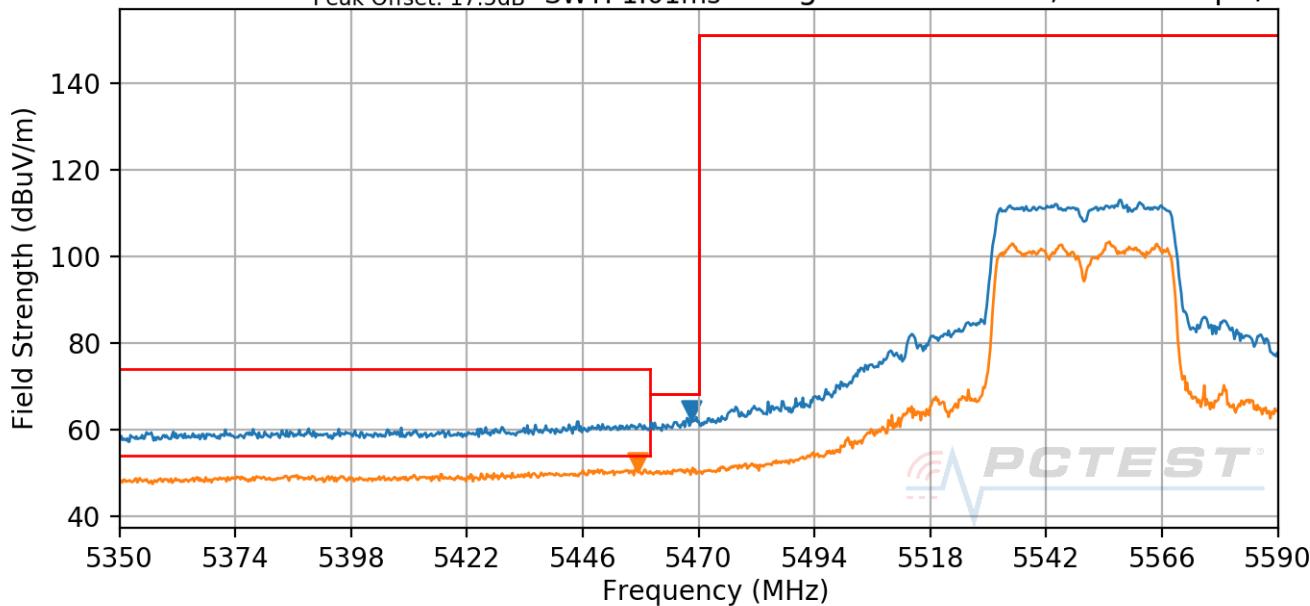

FCC ID: BCGA2603	
IC: 579C-A2603	Proud to be part of 
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021

MEASUREMENT REPORT
(CERTIFICATION)

Approved by:
Quality Manager

Page 139 of 156


V 10.4 5/21/2021

PASS

Average Trace
Peak Trace
Avg. Offset: 18.7dB
Peak Offset: 17.5dB

RBW: 1 MHz
VBW: 3 MHz
SWT: 1.01ms

Peak: 5468.32 MHz, 63.26 dB μ V/m
Avg: 5459.21 MHz, 50.71 dB μ V/m

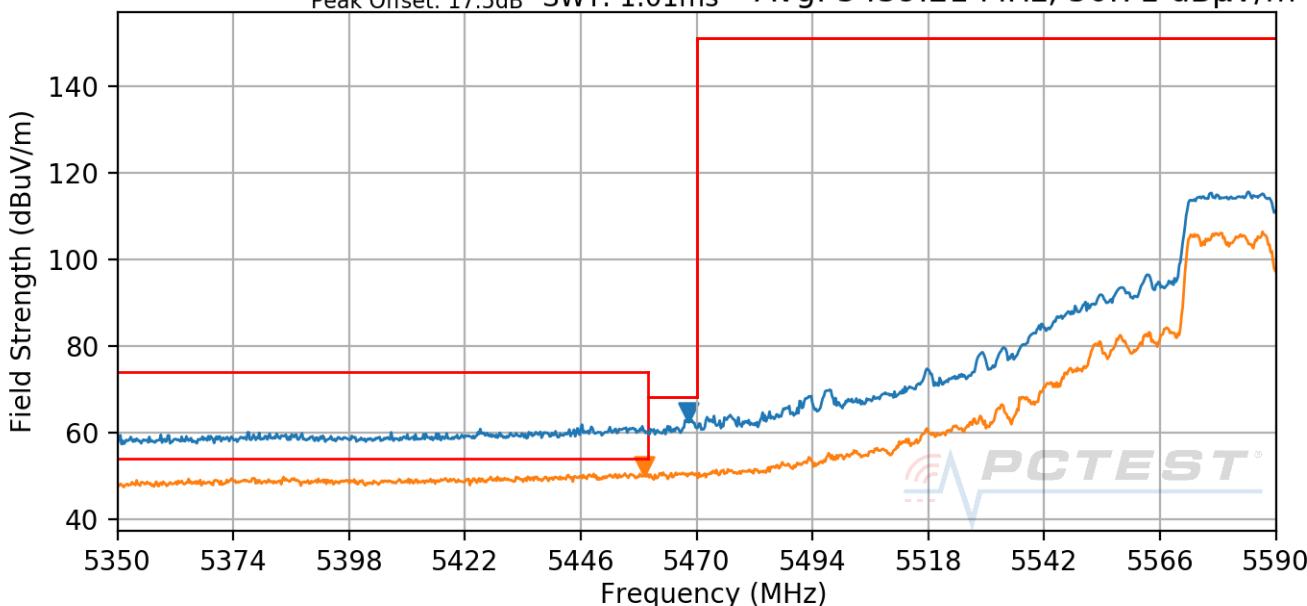


Plot 7-202. (FCC Only) CDD (Pk & Avg, Ch.118 (Low), 802.11n, MCS15)

PASS

Trace: MaxHold
Detector: PK
Offset: 17.9dB

RBW: 1 MHz
VBW: 3 MHz
SWT: 1.01ms

5737.24 MHz
62.96 dB μ V/m

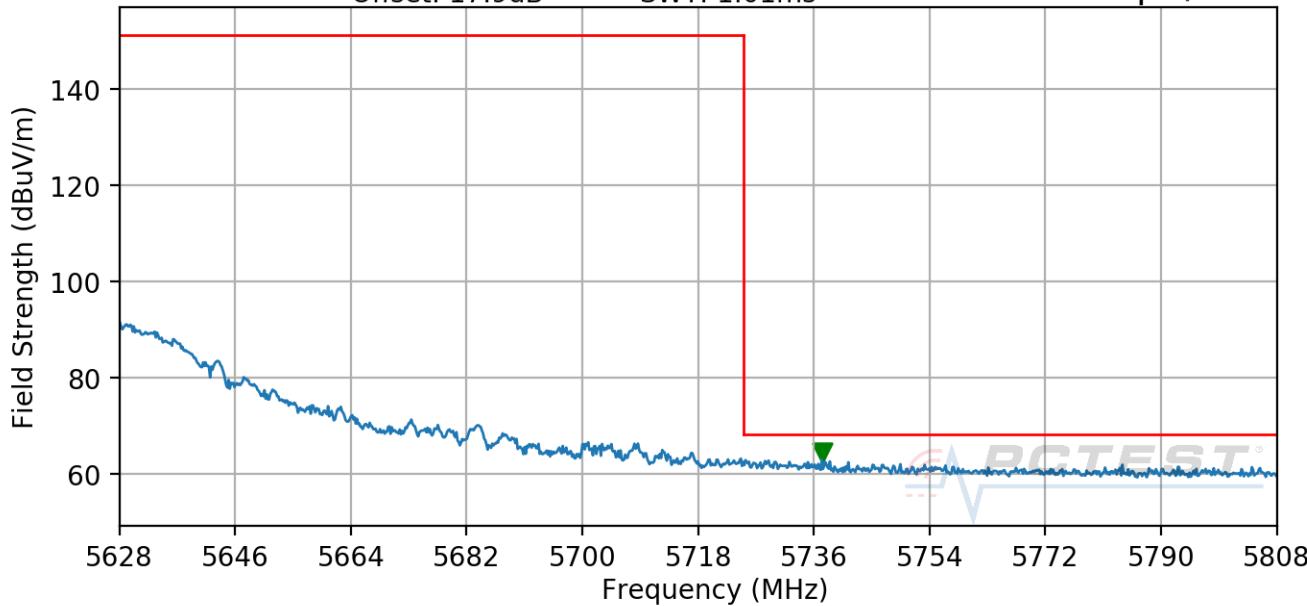

Plot 7-203. (FCC Only) CDD (Pk & Avg, Ch.118 (High), 802.11n, MCS15)


FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device		Page 140 of 156

PASS

Trace: MaxHold
Detector: PK
Offset: 19.0dB

RBW: 1 MHz
VBW: 3 MHz
SWT: 1.01ms

5725.20 MHz
63.05 dB μ V/m

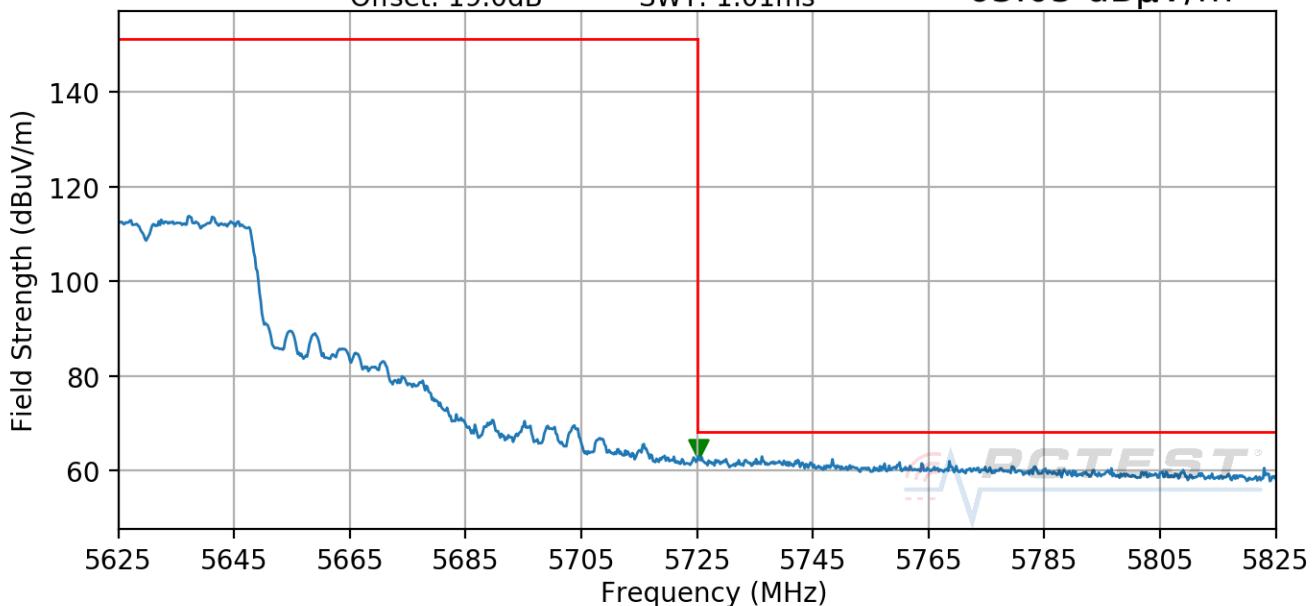


Plot 7-204. (FCC Only) CDD (Pk, Ch.126, 802.11n, MCS15)

PASS

Trace: MaxHold
Detector: PK
Offset: 18.8dB


RBW: 1 MHz
VBW: 3 MHz
SWT: 1.01ms

5751.98 MHz
63.28 dB μ V/m

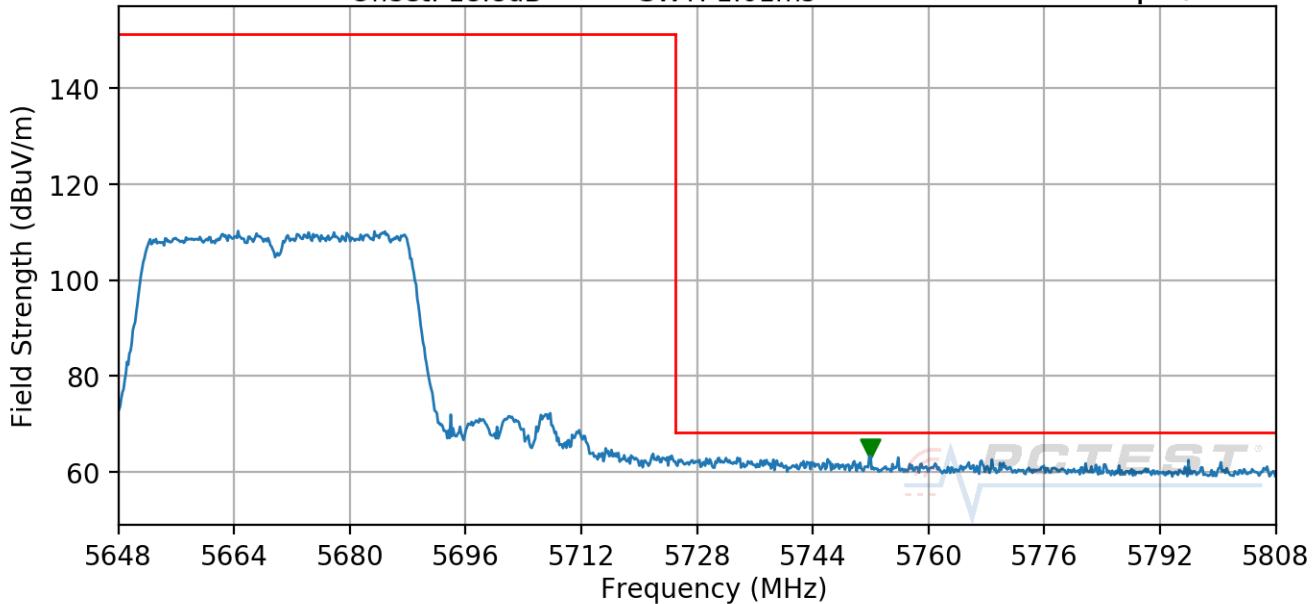


Plot 7-205. CDD (Pk, Ch.134, 802.11n, MCS15)

FCC ID: BCGA2603 IC: 579C-A2603	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device		Page 141 of 156

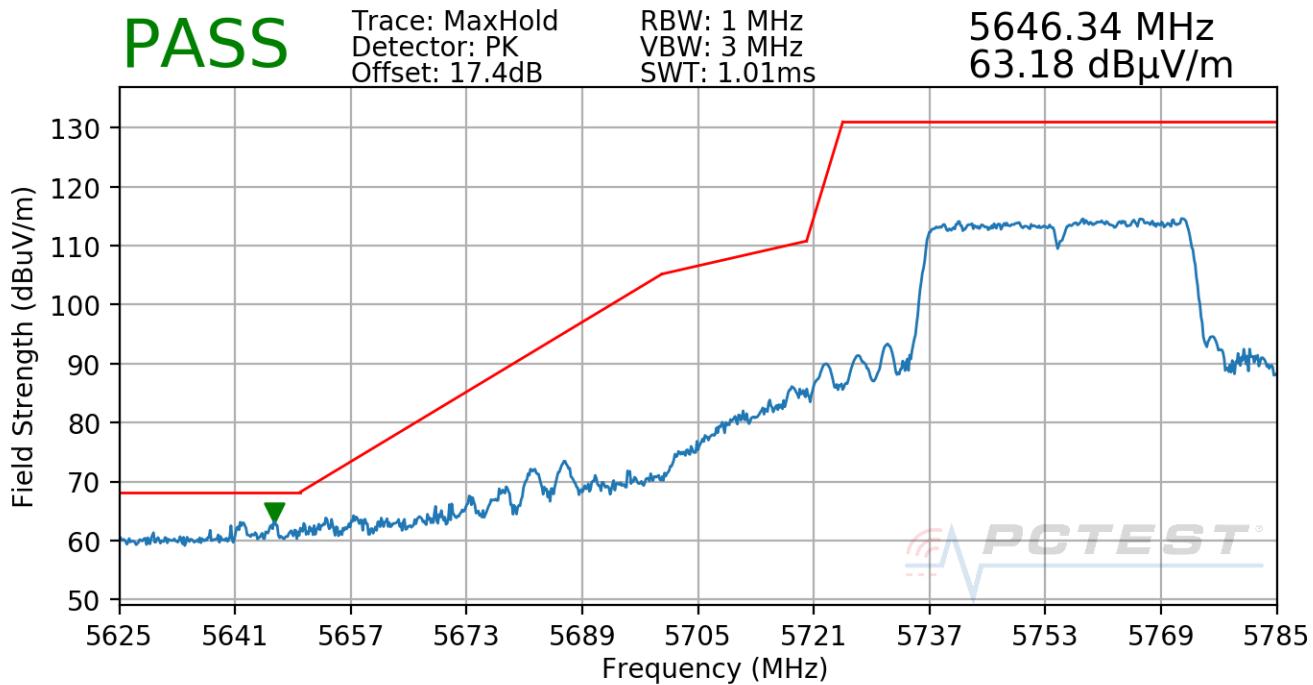

Plot 7-206. CDD (Pk, Ch.151, 802.11n, MCS15)

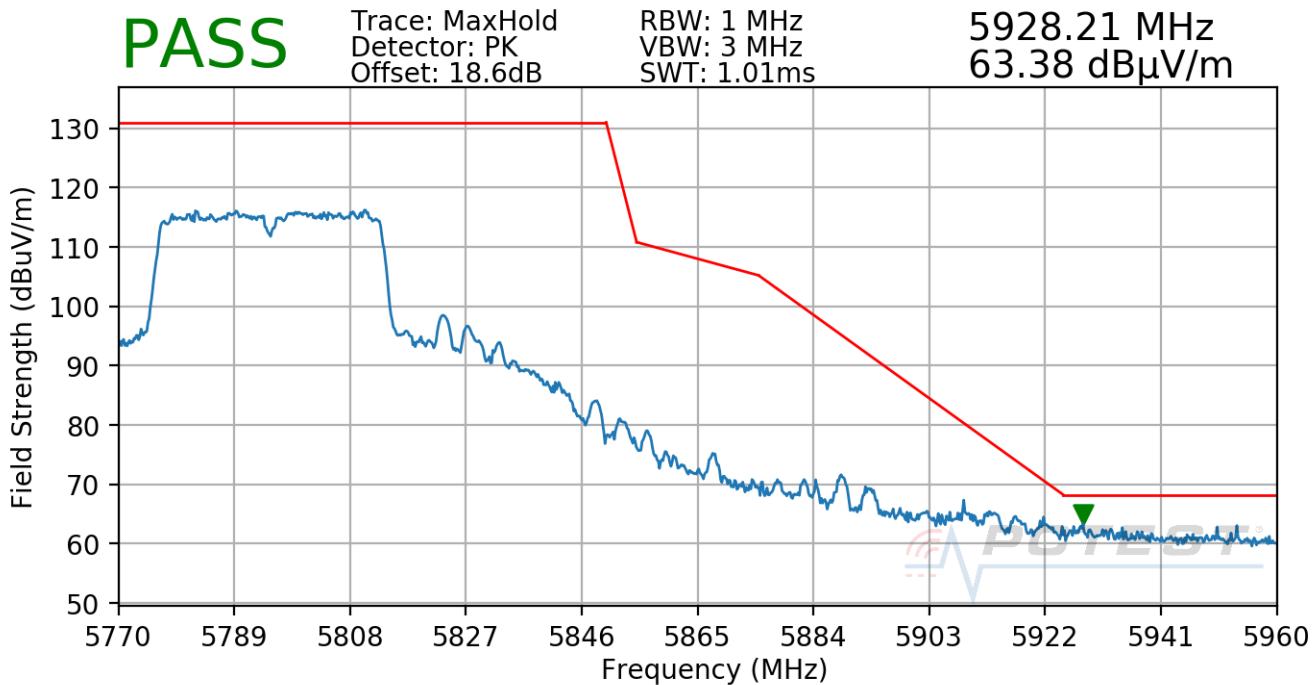


Plot 7-207. CDD (Pk, Ch.159, 802.11n, MCS15)


FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 142 of 156	

7.6.13 CDD Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

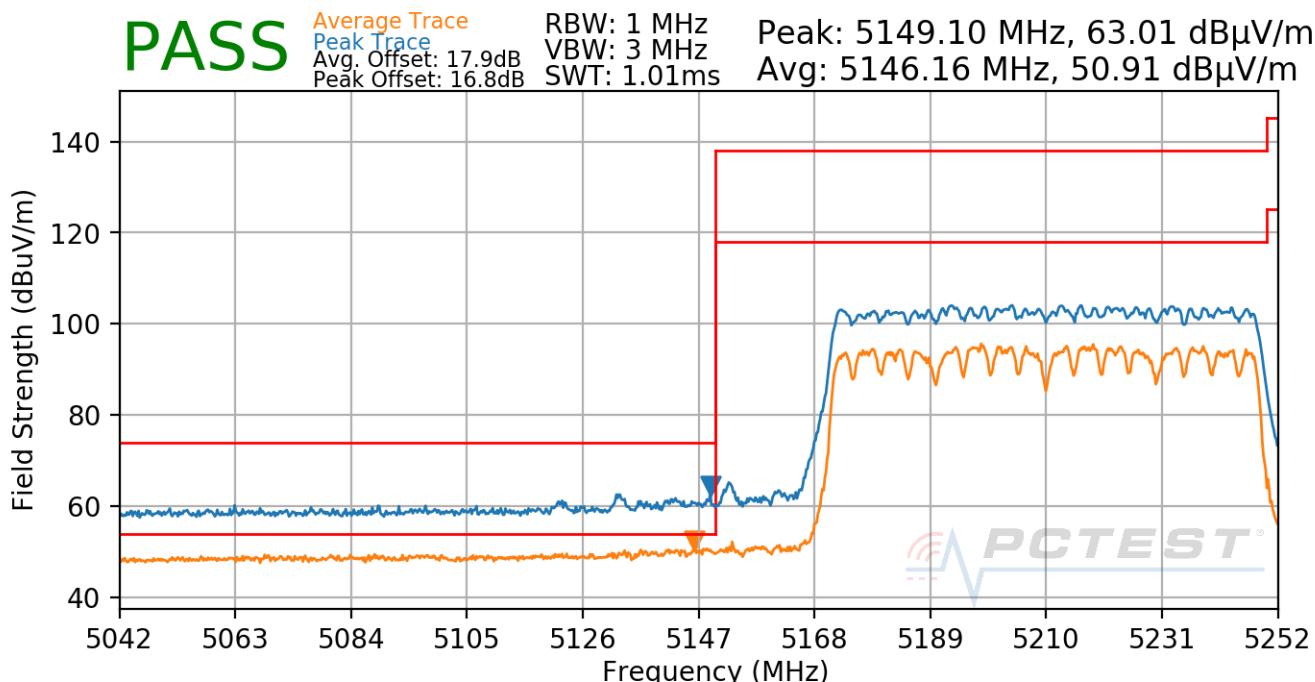

Plot 7-208. CDD (Pk & Avg, Ch.42, 802.11ac, MCS9)

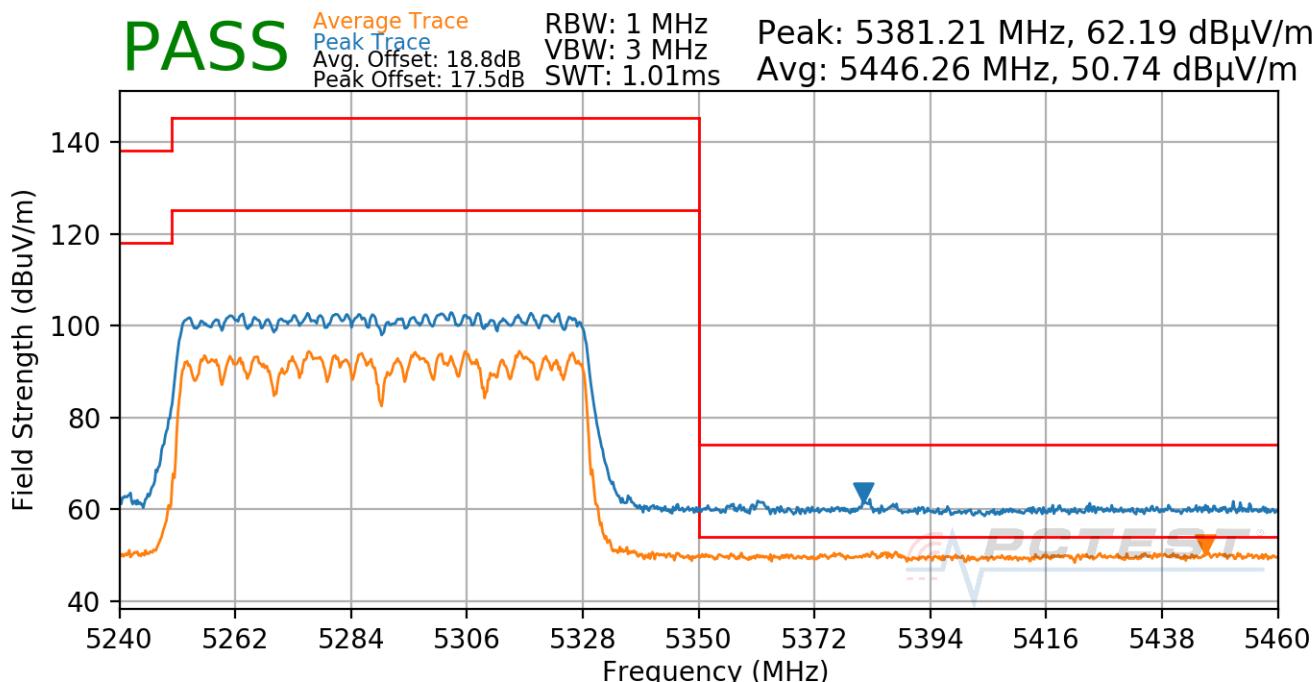

Plot 7-209. CDD (Pk & Avg, Ch.58, 802.11ac, MCS9)


FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 143 of 156	

PASS

Average Trace
Peak Trace
Avg. Offset: 18.9dB
Peak Offset: 17.6dB

RBW: 1 MHz
VBW: 3 MHz
SWT: 1.01ms

Peak: 5462.57 MHz, 61.16 dB μ V/m
Avg: 5457.77 MHz, 51.19 dB μ V/m

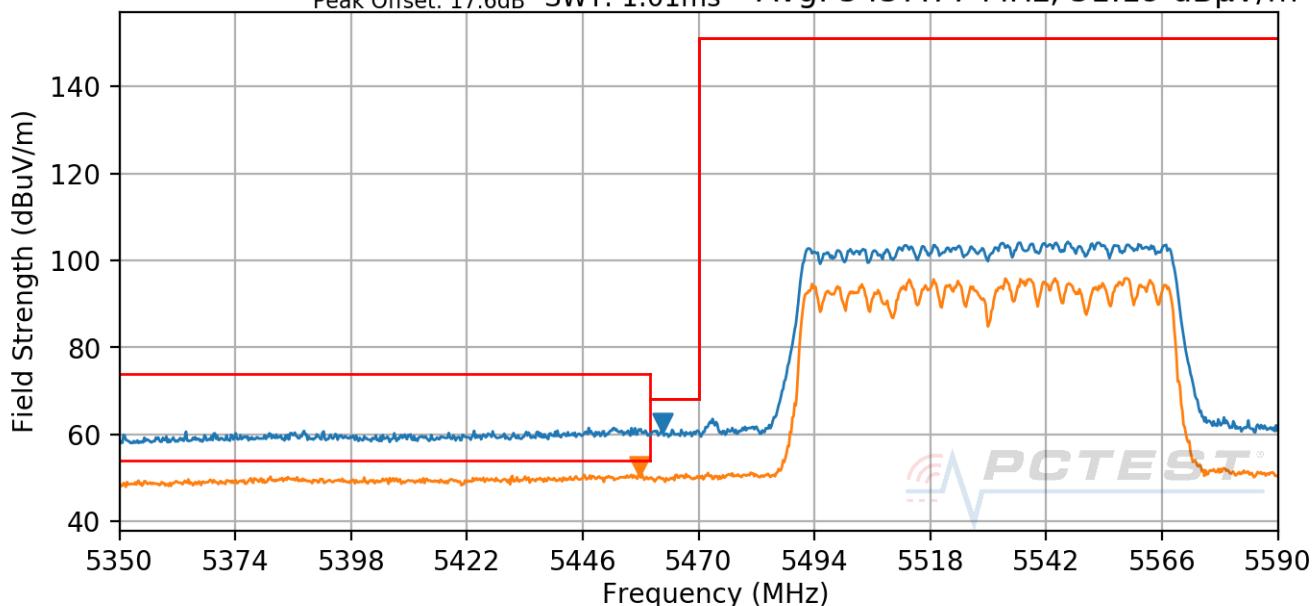


Plot 7-210. CDD (Pk & Avg, Ch.106, 802.11ac, MCS9)

PASS

Average Trace
Peak Trace
Avg. Offset: 18.9dB
Peak Offset: 17.6dB

RBW: 1 MHz
VBW: 3 MHz
SWT: 1.01ms

Peak: 5463.29 MHz, 60.10 dB μ V/m
Avg: 5449.62 MHz, 50.73 dB μ V/m

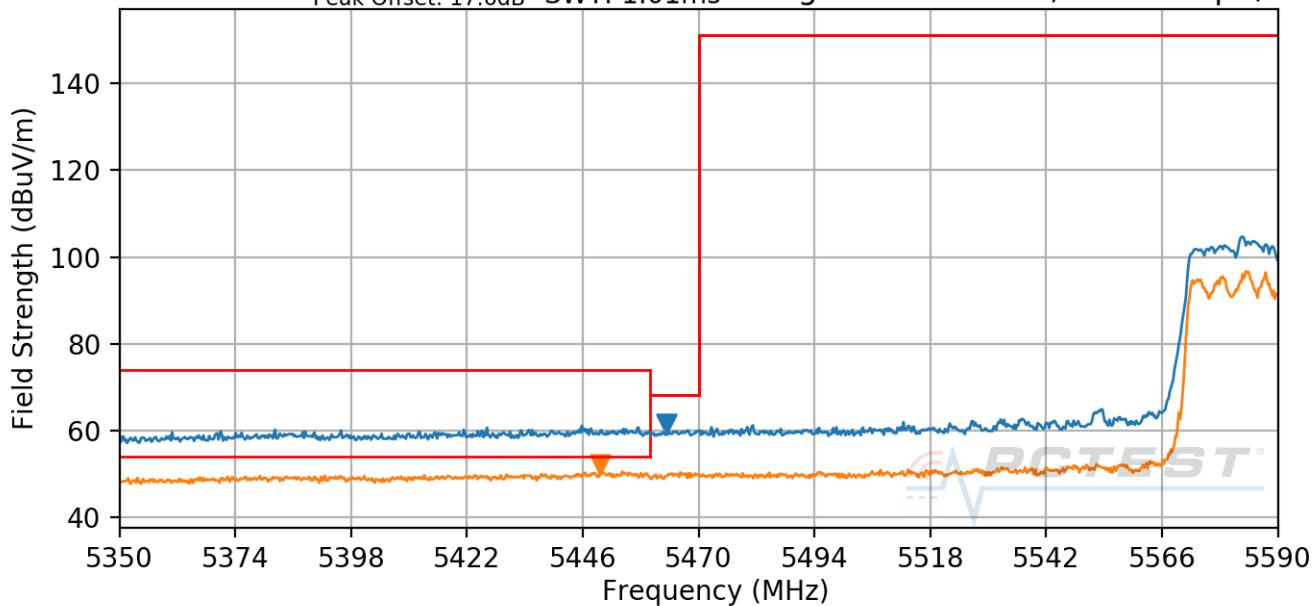

Plot 7-211. (FCC Only) CDD (Pk & Avg, Ch.122 (Low), 802.11ac, MCS9)


FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device		Page 144 of 156

PASS

Trace: MaxHold
Detector: PK
Offset: 18.0dB

RBW: 1 MHz
VBW: 3 MHz
SWT: 1.01ms

5725.91 MHz
63.12 dB μ V/m

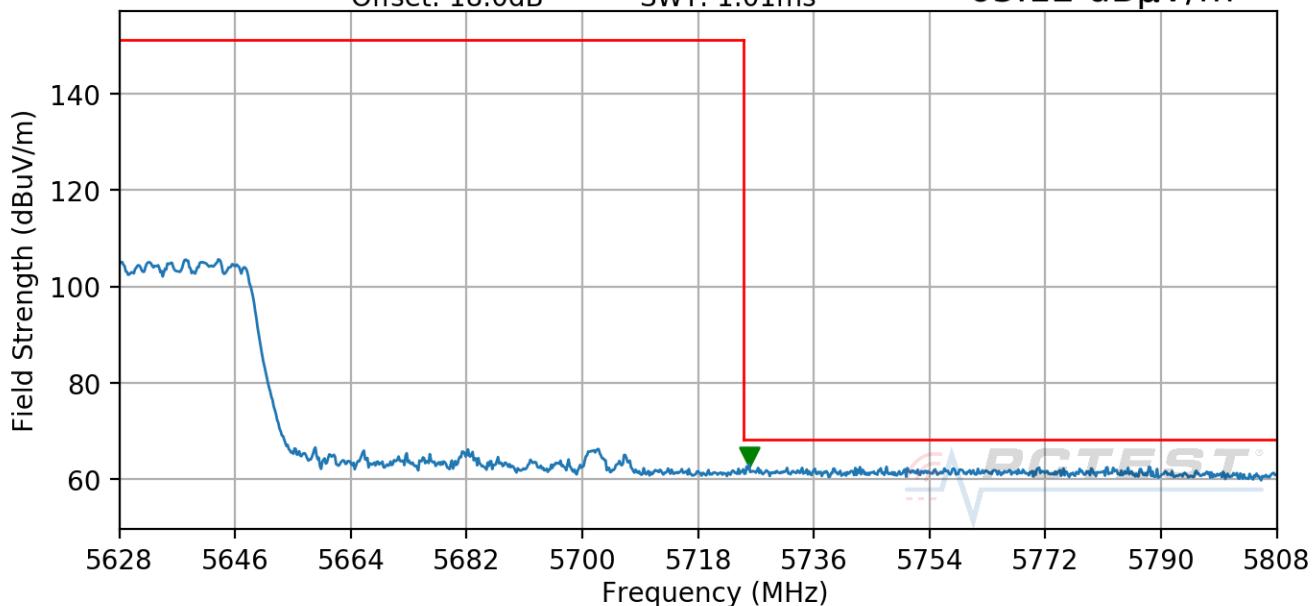


Plot 7-212. (FCC Only) CDD (Pk & Avg, Ch.122 (High), 802.11ac, MCS9)

PASS

Trace: MaxHold
Detector: PK
Offset: 17.4dB

RBW: 1 MHz
VBW: 3 MHz
SWT: 1.01ms

5635.89 MHz
63.22 dB μ V/m

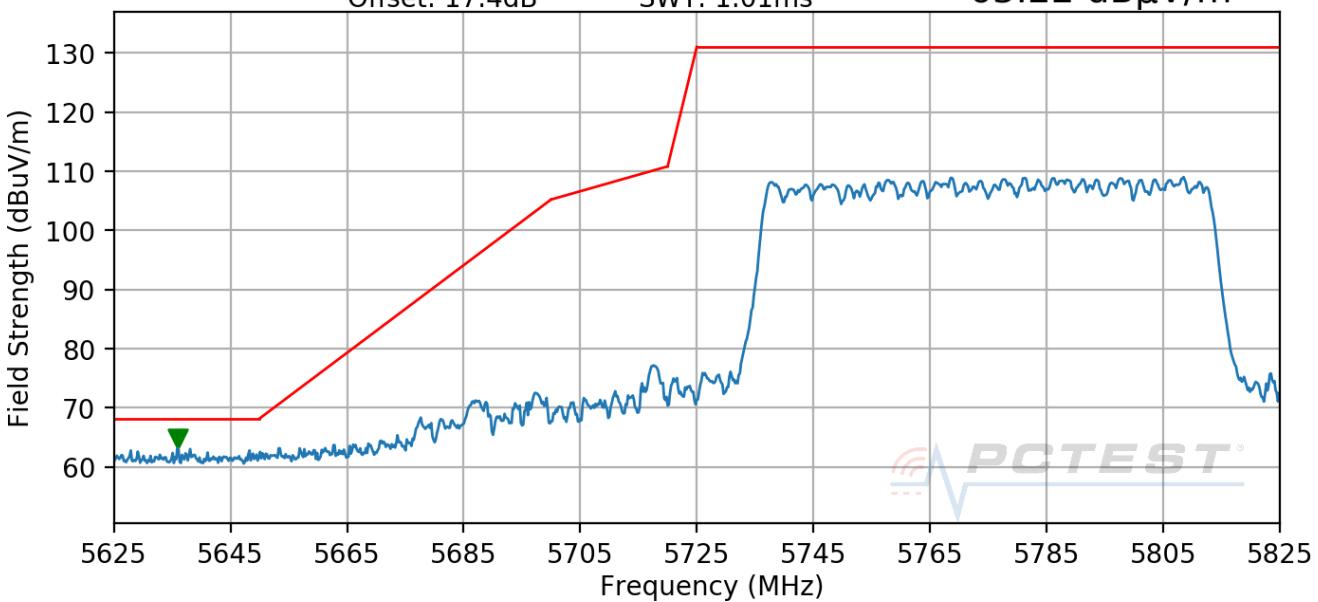

Plot 7-213. CDD (Pk, Ch.155 (Low), 802.11ac, MCS9)


FCC ID: BCGA2603 IC: 579C-A2603	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 145 of 156	

PASS

Trace: MaxHold
Detector: PK
Offset: 18.6dB

RBW: 1 MHz
VBW: 3 MHz
SWT: 1.01ms

5928.48 MHz
63.29 dB μ V/m

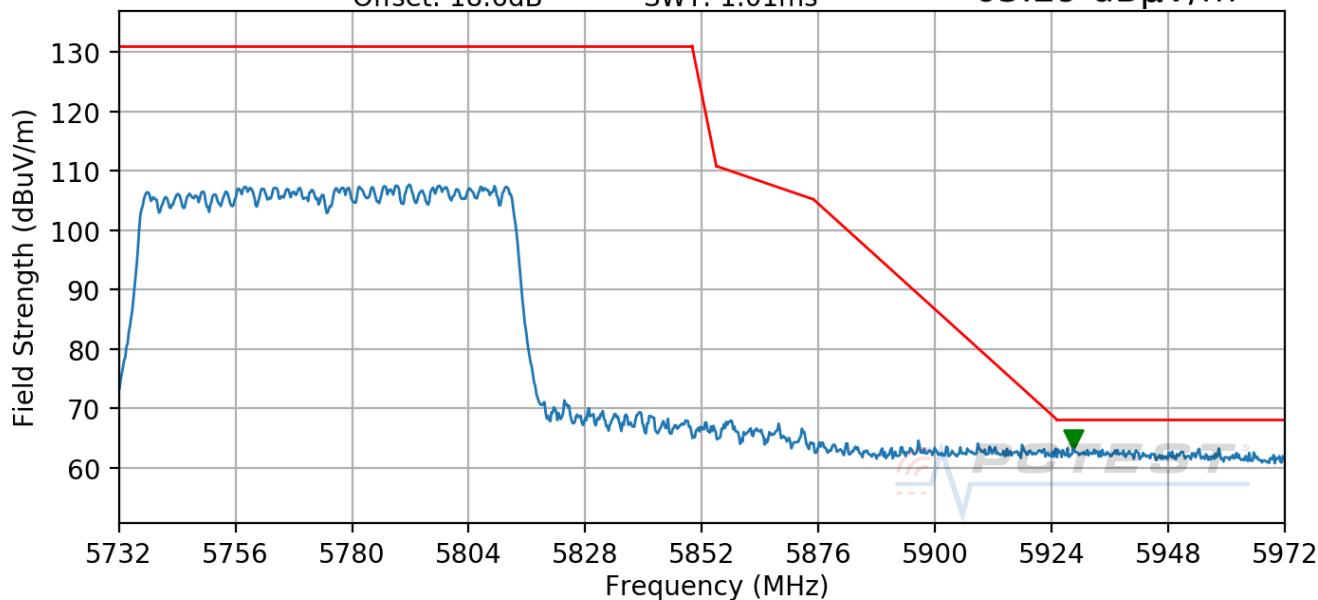

Plot 7-214. CDD (Pk, Ch.155 (High), 802.11ac, MCS9)

FCC ID: BCGA2603 IC: 579C-A2603	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 146 of 156	

7.7 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-75 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-75. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = quasi-peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 147 of 156

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

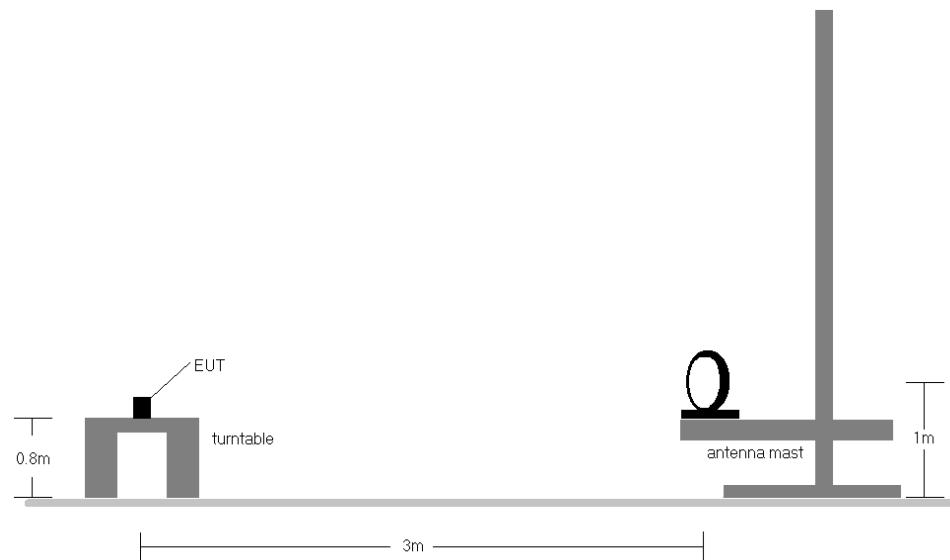


Figure 7-6. Radiated Test Setup < 30MHz

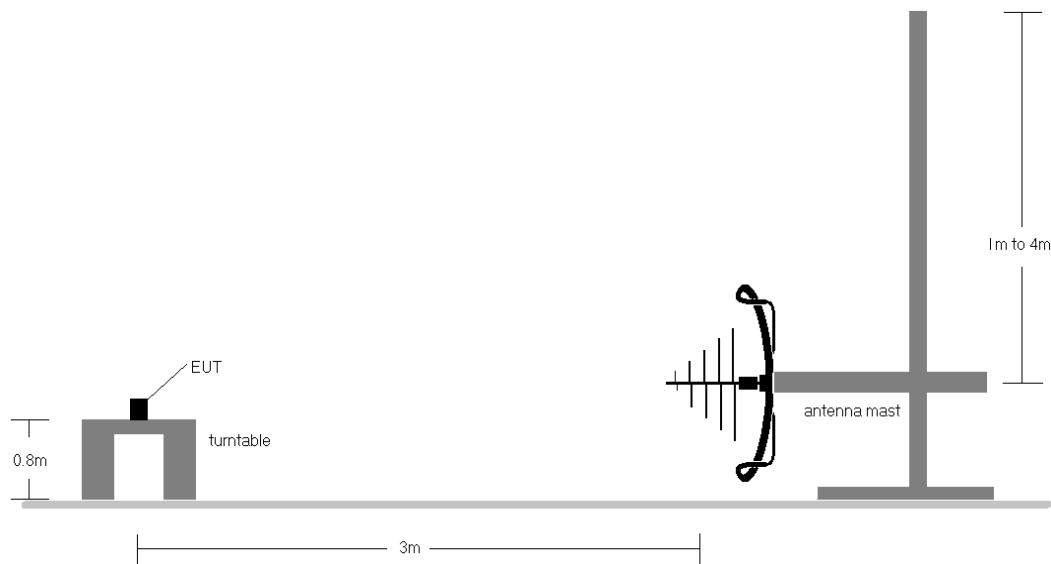


Figure 7-7. Radiated Test Setup < 1GHz

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device		Page 148 of 156

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-75.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
10. All antenna configurations were investigated and only the worst case is reported.
11. The unit was tested with all possible modes and only the highest emission is reported.

Sample Calculations


Determining Spurious Emissions Levels

- Field Strength Level $[\text{dB}_{\mu\text{V/m}}]$ = Analyzer Level $[\text{dBm}] + 107 + \text{AFCL} [\text{dB/m}]$
- AFCL $[\text{dB/m}]$ = Antenna Factor $[\text{dB/m}] + \text{Cable Loss} [\text{dB}] - \text{Preamp Gain} [\text{dB}]$
- Margin $[\text{dB}]$ = Field Strength Level $[\text{dB}_{\mu\text{V/m}}] - \text{Limit} [\text{dB}_{\mu\text{V/m}}]$

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST[®] <small>Proud to be part of element</small>		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 149 of 156	

CDD Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

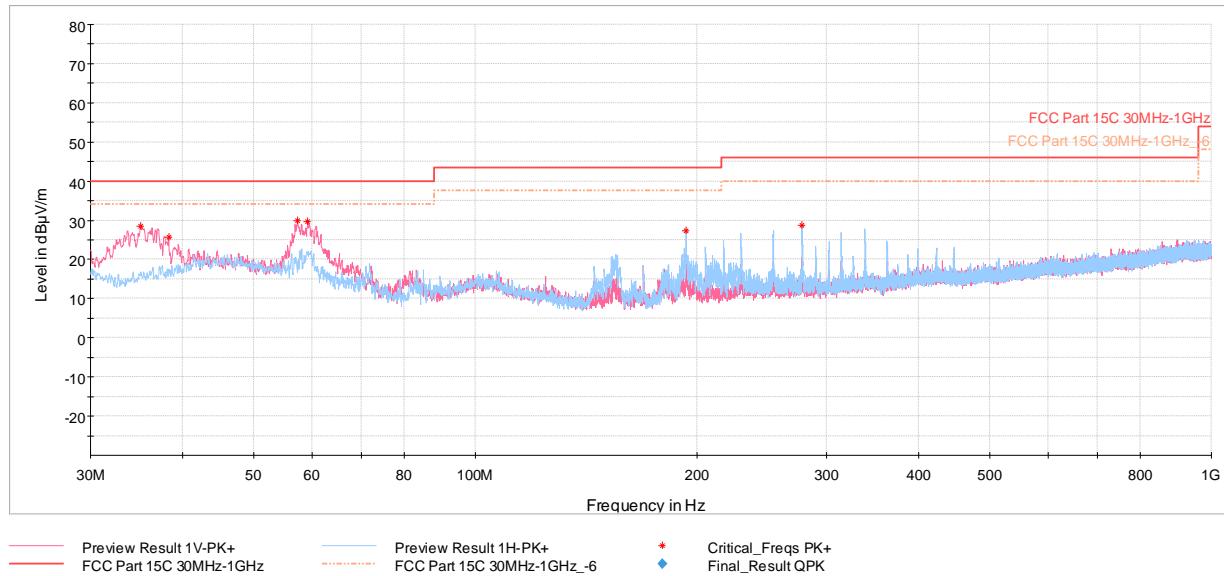

Plot 7-215. Radiated Spurious Emissions below 1GHz CDD, 802.11n, Ch.36 with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
35.14	Max-Peak	V	100	170	-62.40	-16.04	28.56	40.00	-11.44
38.29	Max-Peak	V	100	202	-66.60	-14.74	25.66	40.00	-14.34
57.31	Max-Peak	V	100	51	-63.08	-14.10	29.82	40.00	-10.18
59.20	Max-Peak	V	100	101	-62.86	-14.56	29.58	40.00	-10.42
193.35	Max-Peak	H	100	308	-64.24	-15.45	27.31	43.52	-16.21
278.03	Max-Peak	H	100	340	-64.79	-13.42	28.79	46.02	-17.23


Table 7-26. Radiated Spurious Emissions below 1GHz CDD, 802.11n, Ch.36 with AC/DC Adapter

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device			

7.7.1 Simultaneous Tx Radiated Spurious Emissions Measurements (Below 1GHz) §15.209; RSS-Gen [8.9]

Description	Bluetooth	802.11a/n/ac 5GHz
Antenna	A	A
Channel	78	36
Operating Frequency (MHz)	2480	5180
Data Rate (Mbps)	1.0	MCS0
Mode	GFSK/ePa	802.11n

Table 7-12. Worst Case Simultaneous Transmission Configuration

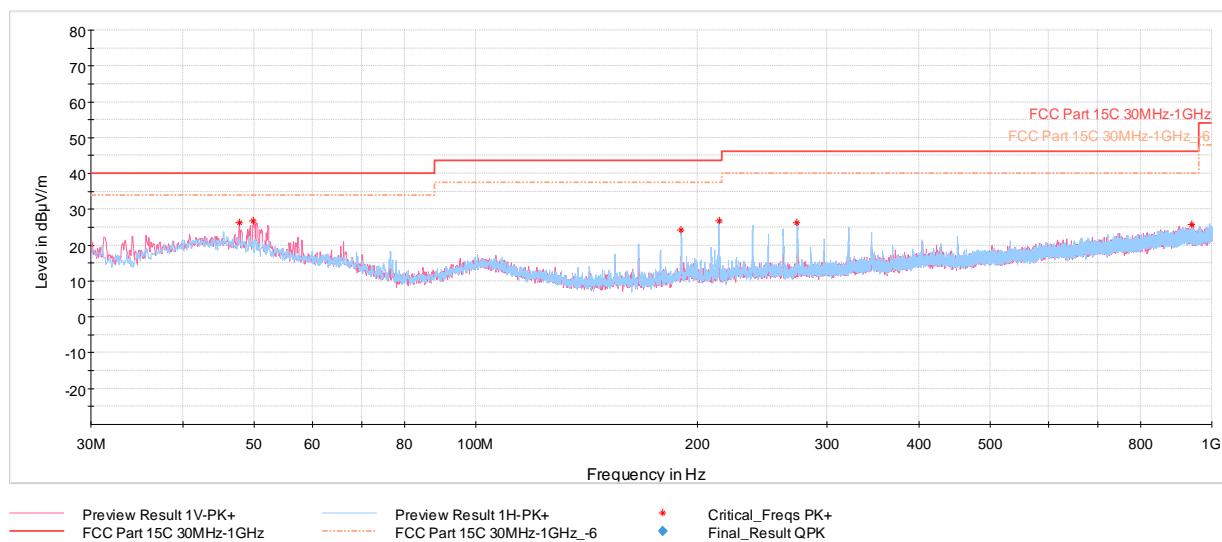

Plot 7-39. Radiated Spurious Emissions Simultaneous Tx Below 1GHz, with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
47.75	Max-Peak	V	100	107	-67.62	-13.02	26.36	40.00	-13.64
49.84	Max-Peak	V	100	249	-67.18	-13.10	26.72	40.00	-13.28
190.10	Max-Peak	H	100	304	-66.88	-15.87	24.25	43.52	-19.27
214.01	Max-Peak	H	100	308	-64.77	-15.40	26.83	43.52	-16.69
273.37	Max-Peak	H	100	336	-67.17	-13.52	26.31	46.02	-19.71
939.57	Max-Peak	V	250	290	-79.40	-1.78	25.82	46.02	-20.20

Table 7-13. Radiated Simultaneous Emission Tx Below 1GHz with AC/DC Adapter

FCC ID: BCGA2603 IC: 579C-A2603	 MEASUREMENT REPORT (CERTIFICATION)				Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device			Page 151 of 156

7.8 AC Line-Conducted Emissions Measurement

§15.407; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-77. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA2603 IC: 579C-A2603	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 152 of 156

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


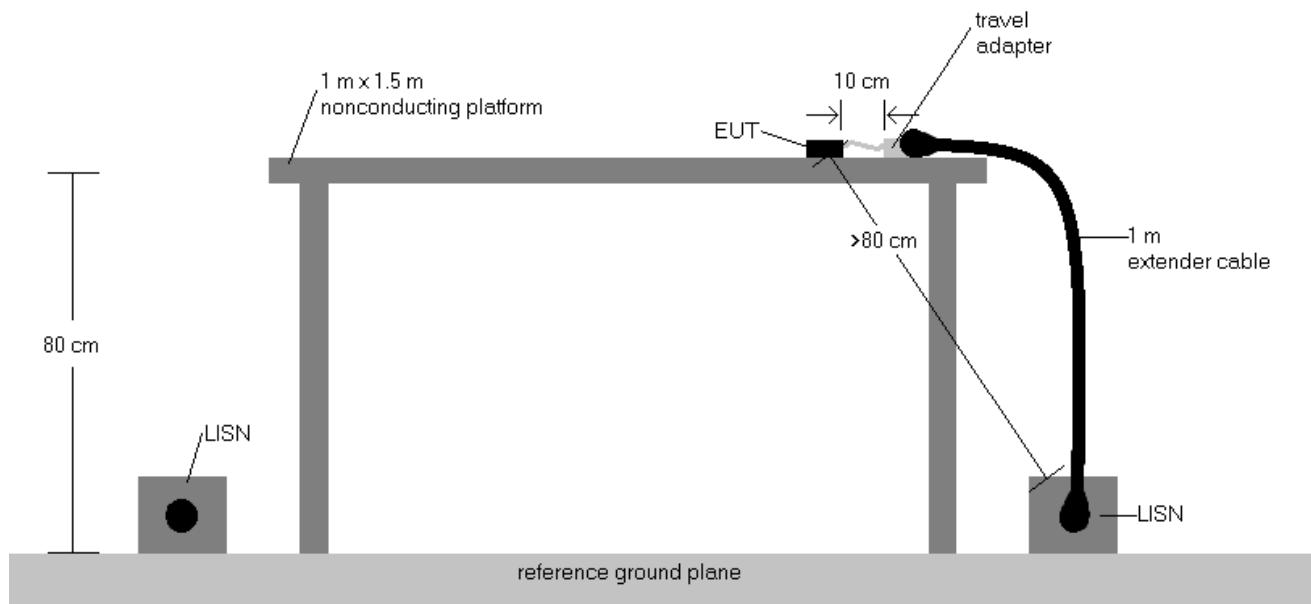


Figure 7-8. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dB μ V) = QP/AV Analyzer/Receiver Level (dB μ V) + Correction Factor (dB)
6. Margin (dB) = QP/AV Level (dB μ V) - QP/AV Limit (dB μ V)
7. Traces shown in plots are made using quasi-peak and average detectors.
8. Deviations to the Specifications: None.

FCC ID: BCGA2603 IC: 579C-A2603	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 153 of 156

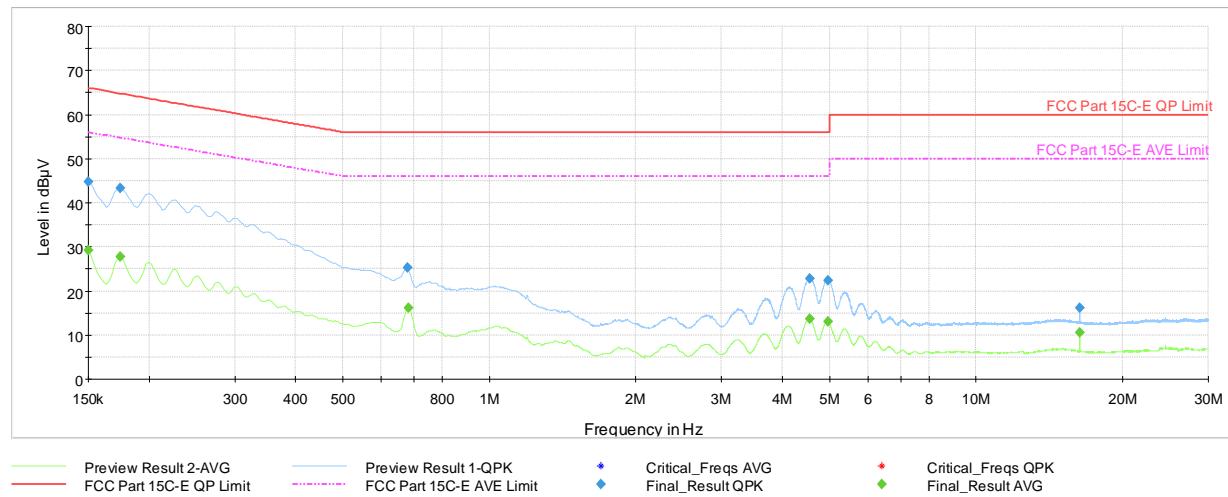


Plot 7-216. AC Line Conducted Plot with 802.11n CDD – Ch.36 (L1), with AC/DC adapter

Frequency [MHz]	Process State	QuasiPeak [dB μ V]	Average [dB μ V]	Limit [dB μ V]	Margin [dB]	Line	PE
0.150	FINAL	—	29.12	56.00	-26.88	L1	GND
0.150	FINAL	44.7	—	66.00	-21.27	L1	GND
0.175	FINAL	—	27.87	54.73	-26.86	L1	GND
0.175	FINAL	43.3	—	64.73	-21.41	L1	GND
0.679	FINAL	25.2	—	56.00	-30.78	L1	GND
0.681	FINAL	—	16.26	46.00	-29.74	L1	GND
4.549	FINAL	—	13.59	46.00	-32.41	L1	GND
4.553	FINAL	22.9	—	56.00	-33.10	L1	GND
4.965	FINAL	22.4	—	56.00	-33.57	L1	GND
4.965	FINAL	—	13.01	46.00	-32.99	L1	GND
16.319	FINAL	—	10.62	50.00	-39.38	L1	GND
16.319	FINAL	16.1	—	60.00	-43.93	L1	GND

Table 7-78. AC Line Conducted Data with 802.11n CDD – Ch.36 (L1) with AC/DC adapter

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device			

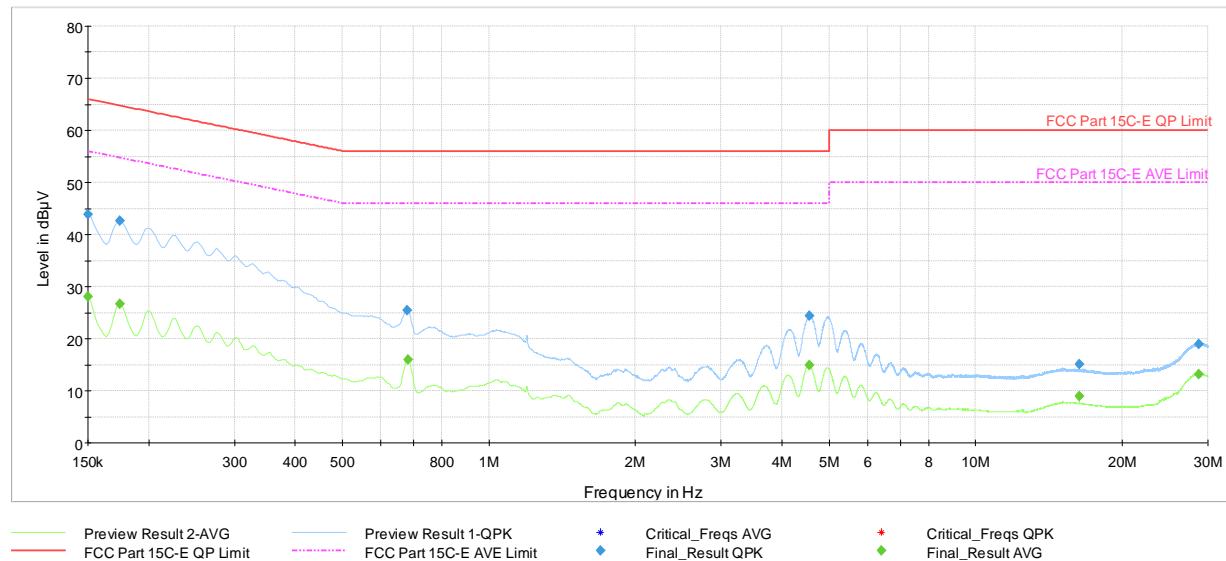

Plot 7-217. AC Line Conducted Plot with 802.11n CDD – Ch.36 (N), with AC/DC adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.150	FINAL	—	28.14	56.00	-27.86	N	GND
0.150	FINAL	44.0	—	66.00	-22.05	N	GND
0.175	FINAL	—	26.75	54.73	-27.98	N	GND
0.175	FINAL	42.6	—	64.73	-22.13	N	GND
0.679	FINAL	25.5	—	56.00	-30.48	N	GND
0.681	FINAL	—	15.91	46.00	-30.09	N	GND
4.551	FINAL	—	14.85	46.00	-31.15	N	GND
4.556	FINAL	24.4	—	56.00	-31.65	N	GND
16.319	FINAL	15.1	—	60.00	-44.94	N	GND
16.319	FINAL	—	8.91	50.00	-41.09	N	GND
28.718	FINAL	19.0	—	60.00	-41.03	N	GND
28.721	FINAL	—	13.21	50.00	-36.79	N	GND

Table 7-79. AC Line Conducted Data with 802.11n CDD – Ch.36 (N), with AC/DC adapter

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST® Proud to be part of  MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 155 of 156	

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device** **FCC ID: BCGA2603** and **IC: 579C-A2603** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST [®] Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-10.BCG	Test Dates: 05/28/2021 – 08/03/2021	EUT Type: Tablet Device	Page 156 of 156	