



DATA REFERENCE REPORT

FCC PART 15.247 / ISED RSS-247 WLAN 802.11b/g/n

Applicant Name:

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

05/28/2021 - 07/27/2021

Test Site/Location:

PCTEST Lab. Morgan Hill, CA, USA

Test Report Serial No.:

1C2106080052-06.BCG

FCC ID:	BCGA2604
IC:	579C-A2604
APPLICANT:	Apple Inc.

Reference Model/HVIN:

A2603

Variant Model/HVIN:

A2604(A2605)

EUT Type:

Tablet Device

Frequency Range:

2412 – 2472MHz

FCC Classification:

Digital Transmission System (DTS)

FCC Rule Part(s):

Part 15 Subpart C (15.247)

ISED Specification:

RSS-247 Issue 2

Test Procedure(s):

ANSI C63.10-2013, KDB 558074 D01 v05r02,
KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 558074 D01 v05r02. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President



FCC ID: BCGA2604	 PCTEST [®] Proud to be part of 	DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080052-06.BCG	Test Dates: 05/28/2021 - 07/27/2021	EUT Type: Tablet Device	Page 1 of 15

T A B L E O F C O N T E N T S

1.0	INTRODUCTION	3
1.1	Scope	3
1.2	PCTEST Test Location.....	3
1.3	Test Facility / Accreditations	3
2.0	PRODUCT INFORMATION.....	4
2.1	Equipment Description	4
2.2	Device Capabilities	4
2.3	Antenna Description	5
2.4	Test Support Equipment.....	5
2.5	Test Configuration	6
2.6	Software and Firmware	6
2.7	EMI Suppression Device(s)/Modifications	6
3.0	DESCRIPTION OF TESTS	7
3.1	Evaluation Procedure	7
3.2	Radiated Emissions.....	7
3.3	Environmental Conditions.....	8
4.0	ANTENNA REQUIREMENTS	9
5.0	MEASUREMENT UNCERTAINTY	10
6.0	TEST EQUIPMENT CALIBRATION DATA	11
7.0	TEST RESULTS (SPOT-CHECK DATA)	12
7.1	Summary	12
7.2	Radiated Spurious Emissions.....	13
8.0	CONCLUSION.....	14
9.0	APPENDIX A: REFERENCE MODEL TEST REPORT.....	15

FCC ID: BCGA2604 IC: 579C-A2604	 PCTEST [®] Proud to be part of 		DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080052-06.BCG	Test Dates: 05/28/2021 - 07/27/2021	EUT Type: Tablet Device	Page 2 of 15	

1.0 INTRODUCTION

1.1 Scope

Per manufacturer declaration, there are two tablet device models, A2603 and A2604(A2605), with high degree of similarity, reference model FCC ID: BCGA2603 / IC: 579C-A2603 and variant model **FCC ID: BCGA2604 / IC: 579C-A2604**. The reference model supports LTE Band 71, while the variant model replaces LTE Band 71 with LTE Band 28 components. Both models share the same material, form factor, circuit design, and components, including antennas and their locations. The reference and variant models use the same power tables and have same tune-up tolerances.

Per FCC/ISED approved Data Referencing Test Plan, testing was done fully on the reference model FCC ID: BCGA2603 / IC: 579C-A2603, while radiated spot-check verification has been performed on variant model **FCC ID: BCGA2604 / IC: 579C-A2604**. Spot-check measurements were conducted, all measurements were investigated and found to be within acceptable tolerance.

Equipment Class	Reference Model FCC ID & IC	Reference Report	Report Title
DTS	BCGA2603 579C-A2603	1C2106080051-06.BCG	RF WLAN Test Report

Table 1-1. Reference Model Details

Reference model FCC ID: BCGA2603 / IC: 579C-A2603 test report has been included in Appendix A.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Morgan Hill, CA 95037, U.S.A.

- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: BCGA2604 IC: 579C-A2604	PCTEST [®] Proud to be part of element		DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080052-06.BCG	Test Dates: 05/28/2021 - 07/27/2021	EUT Type: Tablet Device		Page 3 of 15

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA2604 / IC: 579C-A2604**.

Test Device Serial No.: JY40JD22FL, W2162DHGJW

2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE)

Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442		

Table 2-1. 802.11b/g/n Frequency/ Channel Operations

Note:

1. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of KDB 558074 D01 v05r02 and ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Measured Duty Cycles				
802.11 Mode/Band		Duty Cycle [%]		
		Antenna A	Antenna B	CDD
2.4GHz	b	100.0	100.0	N/A
	g	99.0	99.0	98.0
	n	90.8	90.7	85.3

Table 2-2. Measured Duty Cycles

FCC ID: BCGA2604 IC: 579C-A2604	PCTEST [®] Proud to be part of element			DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080052-06.BCG	Test Dates: 05/28/2021 - 07/27/2021	EUT Type: Tablet Device			

The device employs CDD technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM		CDD	
		Antenna A	Antenna B	Antenna A	Antenna B	Antenna A	Antenna B
2.4GHz	11b	✓	✓	✗	✗	✗	✗
	11g	✓	✓	✓	✓	✓	✓
	11n	✓	✓	✓	✓	✓	✓

Table 2-3. Wi-Fi Configurations

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – CDD function

CDD = Cyclic Delay Diversity - 2Tx Function

Data Rates Supported: 1Mbps, 2Mbps, 5.5Mbps, 11Mbps (b)
6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps (g)
6.5/7.2Mbps, 13/14.4Mbps, 19.5/21.7Mbps, 26/28.9Mbps, 39/43.3Mbps,
52/57.8Mbps, 58.5/65Mbps, 65/72.2Mbps (n)
13/14.4Mbps, 26/28.9Mbps, 39/43.3Mbps, 52/57.8Mbps, 78/86.7Mbps,
104/115.6Mbps, 117/130Mbps, 130/144.4Mbps (CDD n)

This device supports simultaneous multi radio transmission feature, which allows Bluetooth (1x, EDR, LE) and Wifi UNII 5GHz (802.11a/n/ac) to transmit simultaneously at the same antenna. All possible simultaneous configurations have been investigated and worst case mode has been found and reported in Bluetooth and UNII test reports.

2.3 Antenna Description

Following antenna gain provided by manufacturer was used for testing.


Frequency [GHz]	Antenna Gain (dBi)	
	Antenna A	Antenna B
2412-2472	1.91	0.56

Table 2-4. Highest Antenna Gain

2.4 Test Support Equipment

Test Support Equipment List					
1	Apple MacBook w/AC/DC Adapter	Model: A1398 Model: A1435	S/N: C2QKP008F6F3 S/N: N/A		
2	Apple USB Cable	Model: Kanzi	S/N: 32530F		
3	USB-C to Lightning Cable w/ AC Adapter	Model: N/A Model: A2305	S/N: N/A		
4	Apple Pencil	Model: A1603	S/N: G64TG0FEGWTJ		
5	DC Power Supply	Model: KPS3010D	S/N: N/A		

Table 2-5. Test Support Equipment List

FCC ID: BCGA2604 IC: 579C-A2604	 PCTEST Proud to be part of 	DATA REFERENCE REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2106080052-06.BCG	Test Dates: 05/28/2021 - 07/27/2021	EUT Type: Tablet Device			

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013 and KDB 558074 D01 v05r02. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions. See Sections 3.2 for radiated emissions test setups.

There are two vendors of the WiFi/Bluetooth radio modules, variant 1 and variant 2. Both radio modules have the same mechanical outline, same on-board antenna matching circuit, identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. The worst case configuration was found between the two variants. The EUT was also investigated with and without charger.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

Per FCC/ISED Approved Data Referencing Test Plan, spot-check measurements have been conducted and reported. WIFI Spot-check Test Plan can be referred to below Table 2-6.

Technology	Test Case	FCC ID: BCGA2604 IC: 579C-A2604	
		Mode	Channel
DTS (802.11b/g/n)	Radiated Spurious Emissions	MIMO Max Power 2.4GHz: 11n HT20	M

Table 2-6. FCC/ISED Approved Data Referencing Test Plan

Output powers were measured and confirmed to be consistent between Reference and Variant models prior to testing.

2.6 Software and Firmware

The test was conducted with firmware version 19A32670z installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: BCGA2604 IC: 579C-A2604	PCTEST [®] Proud to be part of element		DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080052-06.BCG	Test Dates: 05/28/2021 - 07/27/2021	EUT Type: Tablet Device		Page 6 of 15

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 558074 D01 v05r02 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was rotated about its vertical axis while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

FCC ID: BCGA2604 IC: 579C-A2604	PCTEST [®] Proud to be part of element		DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080052-06.BCG	Test Dates: 05/28/2021 - 07/27/2021	EUT Type: Tablet Device		Page 7 of 15

3.3 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: BCGA2604 IC: 579C-A2604	 PCTEST [®] Proud to be part of element		DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080052-06.BCG	Test Dates: 05/28/2021 - 07/27/2021	EUT Type: Tablet Device	Page 8 of 15	

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- The antenna(s) of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: BCGA2604 IC: 579C-A2604	 PCTEST Proud to be part of 		DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080052-06.BCG	Test Dates: 05/28/2021 - 07/27/2021	EUT Type: Tablet Device	Page 9 of 15	

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Radiated Disturbance (<30MHz)	4.06
Radiated Disturbance (<1GHz)	4.30
Radiated Disturbance (>1GHz)	4.78
Radiated Disturbance (>18GHz)	4.79

FCC ID: BCGA2604 IC: 579C-A2604	 PCTEST [®] Proud to be part of element	DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080052-06.BCG	Test Dates: 05/28/2021 - 07/27/2021	EUT Type: Tablet Device	Page 10 of 15

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Anritsu	ML2496A	Power Meter	11/3/2020	Annual	11/3/2021	184005
Anritsu	MA2411B	Pulse Power Sensor	11/10/2020	Annual	11/10/2021	1726261
Anritsu	MA2411B	Pulse Power Sensor	12/9/2020	Annual	12/9/2021	1726262
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	3/31/2021	Annual	3/31/2022	MY49430244
ATM	180-442-KF	20dB Nominal Gain Horn Antenna	12/9/2020	Annual	12/9/2021	T058701-01
ETS-Lindgren	3142E	BiConiLog Antenna (30MHz - 6GHz)	9/15/2020	Annual	9/15/2021	208204
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	5/3/2021	Annual	5/3/2022	205956
Keysight Technology	N9040B	UXA Signal Analyzer	12/19/2020	Annual	12/19/2021	MY57212015
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	12/3/2020	Annual	12/3/2021	102327
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	12/3/2020	Annual	12/3/2021	101648
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	3/16/2021	Annual	3/16/2022	101619
Rohde & Schwarz	ESW26	EMI Test Receiver	6/11/2021	Annual	6/11/2022	101299
Rohde & Schwarz	ESW44	EMI Test Receiver	11/9/2020	Annual	11/9/2021	101570
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	4/29/2021	Annual	4/29/2022	100051
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Antenna (400MHz-18GHz)	10/2/2020	Annual	10/2/2021	101063
Rohde & Schwarz	HFH2-Z2	Loop Antenna	4/5/2021	Annual	4/5/2022	100519
Rohde & Schwarz	ENV216	Two-Line-V-Network (LISN)	12/7/2020	Annual	12/7/2021	101364

Table 6-1. Test Equipment List

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCGA2604 IC: 579C-A2604	 PCTEST[®] Proud to be part of element	DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080052-06.BCG	Test Dates: 05/28/2021 - 07/27/2021	EUT Type: Tablet Device	Page 11 of 15

7.0 TEST RESULTS (SPOT-CHECK DATA)

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCGA2604
 IC: 579C-A2604
 FCC Classification: Digital Transmission System (DTS)

Technology	Test Configurations			Reference Model		Variant Model		Delta	
	Test Description	Channel	Measurement Frequency [MHz]	FCC ID: BCGA2603 IC: 579C-A2603		FCC ID: BCGA2604 IC: 579C-A2604			
				Peak [dB μ V/m]	Average [dB μ V/m]	Peak [dB μ V/m]	Average [dB μ V/m]	Peak [dB]	Average [dB]
DTS 802.11n	Radiated Spurious Emissions	6	7311.00	56.23	43.87	54.92	43.32	1.31	0.55


Table 7-1. Worst Case Spot-Check Results

Spot-checks were conducted, all measurements were investigated and found to be within acceptable tolerance in accordance with FCC/ISED Approved Data Referencing Test Plan.

FCC ID: BCGA2604 IC: 579C-A2604	 PCTEST[®] Proud to be part of element			DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080052-06.BCG	Test Dates: 05/28/2021 - 07/27/2021	EUT Type: Tablet Device			

7.2 Radiated Spurious Emissions

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

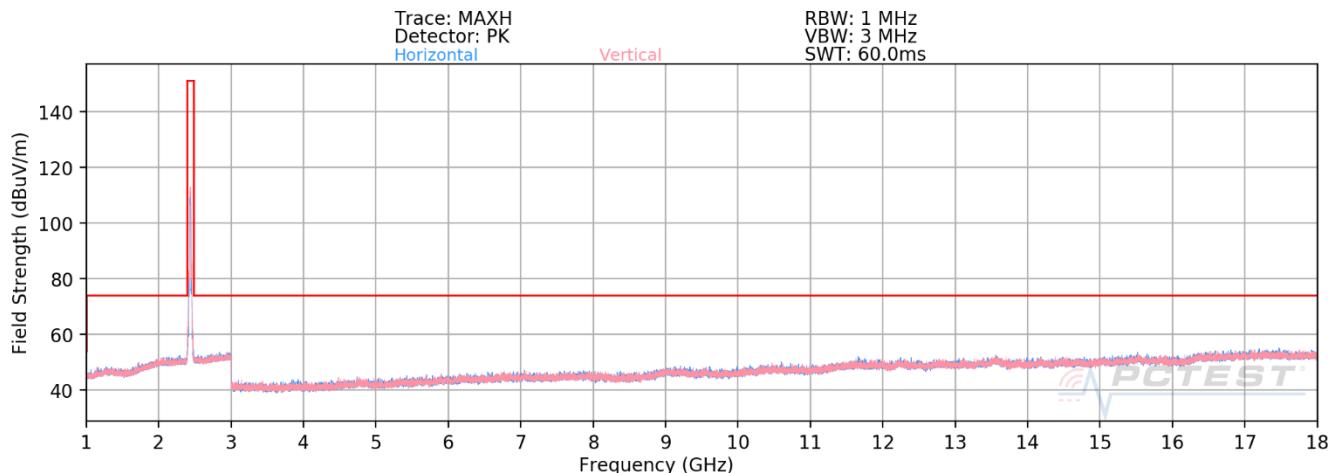

Plot 7-1: Radiated Spurious Emissions above 1GHz CDD (802.11n – Ch. 6)

Mode: 802.11n
Data Rate: MCS8
Distance of Measurements: 3 Meters
Operating Frequency: 2437MHz
Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4874.00	Avg	V	-	-	-77.08	5.91	35.83	53.98	-18.15
4874.00	Peak	V	-	-	-66.04	5.91	46.87	73.98	-27.11
7311.00	Avg	V	310	210	-72.18	8.50	43.32	53.98	-10.66
7311.00	Peak	V	310	210	-60.58	8.50	54.92	73.98	-19.06
12185.00	Avg	V	-	-	-78.13	15.15	44.02	53.98	-9.96
12185.00	Peak	V	-	-	-67.55	15.15	54.60	73.98	-19.38

Table 7-2: Radiated Measurements CDD

FCC ID: BCGA2604 IC: 579C-A2604	 PCTEST® Proud to be part of 			DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080052-06.BCG	Test Dates: 05/28/2021 - 07/27/2021	EUT Type: Tablet Device			

8.0 CONCLUSION

The spot-check data measured for variant model **FCC ID: BCGA2604 / IC: 579C-A2604** is in tolerance with reference model FCC ID: BCGA2603 / IC: 579C-A2603 per FCC/ISED Approved Data Referencing Test Plan.

FCC ID: BCGA2604 IC: 579C-A2604	 PCTEST [®] Proud to be part of 		DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080052-06.BCG	Test Dates: 05/28/2021 - 07/27/2021	EUT Type: Tablet Device		Page 14 of 15

9.0 APPENDIX A: REFERENCE MODEL TEST REPORT

Attached is the test report (1C2106080051-06.BCG) from reference model FCC ID: BCGA2603 / IC: 579C-A2603, which includes referenced data results.

FCC ID: BCGA2604 IC: 579C-A2604	 PCTEST® Proud to be part of 		DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080052-06.BCG	Test Dates: 05/28/2021 - 07/27/2021	EUT Type: Tablet Device	Page 15 of 15	



MEASUREMENT REPORT

FCC PART 15.247 / ISED RSS-247 WLAN 802.11b/g/n

Applicant Name:

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

05/28/2021 – 07/23/2021

Test Site/Location:

PCTEST Lab. Morgan Hill, CA, USA

Test Report Serial No.:

1C2106080051-06.BCG

FCC ID:	BCGA2603
IC:	579C-A2603
APPLICANT:	Apple Inc.

Application Type:

Certification

Model/HVIN:

A2603

EUT Type:

Tablet Device

Frequency Range:

2412 – 2472MHz

FCC Classification:

Digital Transmission System (DTS)

FCC Rule Part(s):

Part 15 Subpart C (15.247)

ISED Specification:

RSS-247 Issue 2

Test Procedure(s):

ANSI C63.10-2013, KDB 558074 D01 v05r02,

KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 558074 D01 v05r02. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President





FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST [®] Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 1 of 112

T A B L E O F C O N T E N T S

1.0	INTRODUCTION.....	4
1.1	Scope.....	4
1.2	PCTEST Test Location	4
1.3	Test Facility / Accreditations	4
2.0	PRODUCT INFORMATION	5
2.1	Equipment Description.....	5
2.2	Device Capabilities.....	5
2.3	Antenna Description.....	6
2.4	Test Support Equipment	7
2.5	Test Configuration.....	7
2.6	Software and Firmware	8
2.7	EMI Suppression Device(s)/Modifications	8
3.0	DESCRIPTION OF TESTS	9
3.1	Evaluation Procedure.....	9
3.2	AC Line Conducted Emissions	9
3.3	Radiated Emissions	10
3.4	Environmental Conditions	10
4.0	ANTENNA REQUIREMENTS	11
5.0	MEASUREMENT UNCERTAINTY.....	12
6.0	TEST EQUIPMENT CALIBRATION DATA.....	13
7.0	TEST RESULTS	14
7.1	Summary.....	14
7.2	6dB and 99% Bandwidth Measurements	15
7.3	Output Power Measurement	28
7.3.1	Average Output Power Measurement.....	29
7.3.2	Peak Output Power Measurement.....	30
7.4	Power Spectral Density.....	32
7.5	Conducted Authorized Band Edge.....	53
7.6	Conducted Spurious Emissions	70
7.7	Radiated Spurious Emissions – Above 1 GHz.....	78
7.7.1	Antenna A Radiated Spurious Emission Measurements	81
7.7.2	Antenna B Radiated Spurious Emission Measurements	84
7.7.3	CDD Radiated Spurious Emission Measurements	87
7.7.4	Antenna A Radiated Restricted Band Edge Measurements	91
7.7.5	Antenna B Radiated Restricted Band Edge Measurements	96
7.7.6	CDD Radiated Restricted Band Edge Measurements	101
7.8	Radiated Spurious Emissions – Below 1GHz	104
7.9	AC Line-Conducted Emissions Measurement	108
8.0	CONCLUSION	112

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST [®] Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device		Page 2 of 112

MEASUREMENT REPORT



Mode	Tx Frequency (MHz)	Antenna A				Antenna B			
		Avg Conducted		Peak Conducted		Avg Conducted		Peak Conducted	
		Max. Power (mW)	Max. Power (dBm)						
802.11b	2412 - 2472	39.537	15.97	97.724	19.90	39.811	16.00	97.949	19.91
802.11g	2412 - 2472	39.084	15.92	323.594	25.10	38.905	15.90	338.065	25.29
802.11n	2412 - 2472	39.537	15.97	412.098	26.15	39.628	15.98	433.511	26.37

EUT Overview SISO

Mode	Tx Frequency (MHz)	Antenna A				Antenna B				CDD			
		Avg Conducted		Peak Conducted		Avg Conducted		Peak Conducted		Avg Conducted		Peak Conducted	
		Max. Power (mW)	Max. Power (dBm)										
802.11g	2412 - 2472	38.994	15.91	273.527	24.37	39.628	15.98	270.396	24.32	77.804	18.91	544.503	27.36
802.11n	2412 - 2472	39.719	15.99	290.402	24.63	38.994	15.91	277.971	24.44	78.163	18.93	566.239	27.53

EUT Overview CDD

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST [®] Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 - 07/23/2021	EUT Type: Tablet Device	Page 3 of 112

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Morgan Hill, CA 95037, U.S.A.

- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 4 of 112

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA2603, IC: 579C-A2603**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN (DTS) transmitter.

Test Device Serial No.: Y4925R6Y2T, Y461W0LQ4M, QCQ16N0YCW, WV4HX0WRXK, F9F10620HBP128J11

2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE)

Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442		

Table 2-1. 802.11b/g/n Frequency/ Channel Operations

Note:

1. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of KDB 558074 D01 v05r02 and ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Measured Duty Cycles				
802.11 Mode/Band		Duty Cycle [%]		
		Antenna A	Antenna B	CDD
2.4GHz	b	100.0	100.0	N/A
	g	99.0	99.0	98.0
	n	90.8	90.7	85.3

Table 2-2. Measured Duty Cycles

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST[®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 5 of 112

2. The device employs CDD technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM		CDD	
		Antenna A	Antenna B	Antenna A	Antenna B	Antenna A	Antenna B
2.4GHz	11b	✓	✓	✗	✗	✗	✗
	11g	✓	✓	✓	✓	✓	✓
	11n	✓	✓	✓	✓	✓	✓

Table 2-3. Wi-Fi Configurations

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – CDD function

CDD = Cyclic Delay Diversity - 2Tx Function

Data Rates Supported: 1Mbps, 2Mbps, 5.5Mbps, 11Mbps (b)
 6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps (g)
 6.5/7.2Mbps, 13/14.4Mbps, 19.5/21.7Mbps, 26/28.9Mbps, 39/43.3Mbps,
 52/57.8Mbps, 58.5/65Mbps, 65/72.2Mbps (n)
 13/14.4Mbps, 26/28.9Mbps, 39/43.3Mbps, 52/57.8Mbps, 78/86.7Mbps,
 104/115.6Mbps, 117/130Mbps, 130/144.4Mbps (CDD n)

3. This device supports simultaneous multi radio transmission feature, which allows Bluetooth (1x, EDR, LE) and Wifi UNII 5GHz (802.11a/n/ac) to transmit simultaneously at the same antenna. All possible simultaneous configurations have been investigated and worst case mode has been found and reported in Bluetooth and UNII test reports.

2.3 Antenna Description

Following antenna gains provided by manufacturer were used for the testing.

Frequency [GHz]	Antenna Gain (dBi)	
	Antenna A	Antenna B
2412-2472	1.91	0.56

Table 2-4. Highest Antenna Gain

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST[®] Proud to be part of element			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device			

2.4 Test Support Equipment

Test Support Equipment List					
1	Apple MacBook w/AC/DC Adapter	Model: A1398 Model: A1435	S/N: C2QKP008F6F3 S/N: N/A		
2	Apple USB Cable	Model: Kanzi	S/N: 32530F		
3	USB-C to Lightning Cable w/ AC Adapter	Model: N/A Model: A2305	S/N: N/A S/N: N/A		
4	Apple Pencil	Model: A1603	S/N: G64TG0FEGWTJ		
5	DC Power Supply	Model: KPS3010D	S/N: N/A		

Table 2-5. Test Support Equipment List

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013 and KDB 558074 D01 v05r02. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, Section 3.3 for radiated emissions test setups, and, 7.2, 7.3, 7.4, 7.5, and 7.6 for antenna port conducted emissions test setups.

There are two vendors of the WiFi/Bluetooth radio modules, variant 1 and variant 2. Both radio modules have the same mechanical outline, same on-board antenna matching circuit, identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. The worst case configuration was found between the two variants. The EUT was also investigated with and without charger.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configuration were investigated and EUT powered by AC/DC was the worst case.

- EUT powered by AC/DC adaptor via USB-C cable with wire charger
- EUT powered by host PC via USB-C cable with wire charger

802.11n CDD mode test data provided in this report covers 802.11n SDM.

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST[®] Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device		Page 7 of 112

2.6 Software and Firmware

The test was conducted with firmware version 19A32670z installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST Proud to be part of  element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 8 of 112

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 558074 D01 v05r02 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50µH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz - 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that the cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.9. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.50.40.

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST[®] Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 - 07/23/2021	EUT Type: Tablet Device		Page 9 of 112

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was rotated about its vertical axis while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST[®] Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device		Page 10 of 112

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connections to an external antenna.

Conclusion:

The EUT unit complies with the requirement of §15.203.

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 11 of 112

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.65
Line Conducted Disturbance	2.75
Radiated Disturbance (<30MHz)	4.06
Radiated Disturbance (<1GHz)	4.30
Radiated Disturbance (>1GHz)	4.78
Radiated Disturbance (>18GHz)	4.79

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 12 of 112

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Anritsu	ML2496A	Power Meter	11/3/2020	Annual	11/3/2021	184005
Anritsu	MA2411B	Pulse Power Sensor	11/10/2020	Annual	11/10/2021	1726261
Anritsu	MA2411B	Pulse Power Sensor	12/9/2020	Annual	12/9/2021	1726262
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	3/31/2021	Annual	3/31/2022	MY49430244
ATM	180-442-KF	20dB Nominal Gain Horn Antenna	12/9/2020	Annual	12/9/2021	T058701-01
ETS-Lindgren	3142E	BiConiLog Antenna (30MHz - 6GHz)	9/15/2020	Annual	9/15/2021	208204
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	5/3/2021	Annual	5/3/2022	205956
Keysight Technology	N9040B	UXA Signal Analyzer	12/19/2020	Annual	12/19/2021	MY57212015
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	12/3/2020	Annual	12/3/2021	102327
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	12/3/2020	Annual	12/3/2021	101648
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	3/16/2021	Annual	3/16/2022	101619
Rohde & Schwarz	ESW26	EMI Test Receiver	6/11/2021	Annual	6/11/2022	101299
Rohde & Schwarz	ESW44	EMI Test Receiver	11/9/2020	Annual	11/9/2021	101570
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	4/29/2021	Annual	4/29/2022	100051
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Antenna (400MHz-18GHz)	10/2/2020	Annual	10/2/2021	101063
Rohde & Schwarz	HFH2-Z2	Loop Antenna	4/5/2021	Annual	4/5/2022	100519
Rohde & Schwarz	ENV216	Two-Line-V-Network (LISN)	12/7/2020	Annual	12/7/2021	101364

Table 6-1. Test Equipment List

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST[®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 13 of 112

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCGA2603
 IC: 579C-A2603
 FCC Classification: Digital Transmission System (DTS)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	RSS-247 [5.2]	6dB Bandwidth	> 500kHz	CONDUCTED	PASS	Section 7.2
2.1049	RSS-Gen [6.7]	Occupied Bandwidth	N/A		N/A	Section 7.2
15.247(b)(3)	RSS-247 [5.4]	Transmitter Output Power	< 1 Watt		PASS	Sections 7.3
15.247(e)	RSS-247 [5.2]	Transmitter Power Spectral Density	< 8dBm / 3kHz Band		PASS	Section 7.4
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	≥ 20dBc		PASS	Sections 7.5, 7.6
15.205 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])	RADIATED	PASS	Sections 7.7, 7.8
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits (RSS-Gen[8.8])	AC LINE CONDUCTED	PASS	Section 7.9

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "WLAN Automation," Version 3.8.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Chamber Automation," Version 1.3.1.

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 14 of 112

7.2 6dB and 99% Bandwidth Measurements

§15.247(a.2); §2.1049; RSS-247 [5.2]; RSS-Gen[6.7]

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the transmitter antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The minimum permissible 6dB bandwidth is 500 kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 11.8.2 Option 2
 KDB 558074 D01 v05r02 – Section 8.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 6. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

All data rates and antenna configurations were investigated and only the worst case is reported.


FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST[®] Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device		Page 15 of 112

Antenna A 6dB and 99% Bandwidth Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass / Fail
2412	1	b	11	11.186	8.598	0.500	Pass
2437	6	b	11	11.160	8.652	0.500	Pass
2462	11	b	11	11.104	8.337	0.500	Pass
2412	1	g	54	16.350	15.931	0.500	Pass
2437	6	g	54	16.350	16.139	0.500	Pass
2462	11	g	54	16.343	16.068	0.500	Pass
2412	1	n	65/72.2 (MCS7)	17.650	17.692	0.500	Pass
2437	6	n	65/72.2 (MCS7)	17.663	17.737	0.500	Pass
2462	11	n	65/72.2 (MCS7)	17.626	17.698	0.500	Pass

Table 7-2. Conducted Bandwidth Measurements Antenna A

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 16 of 112

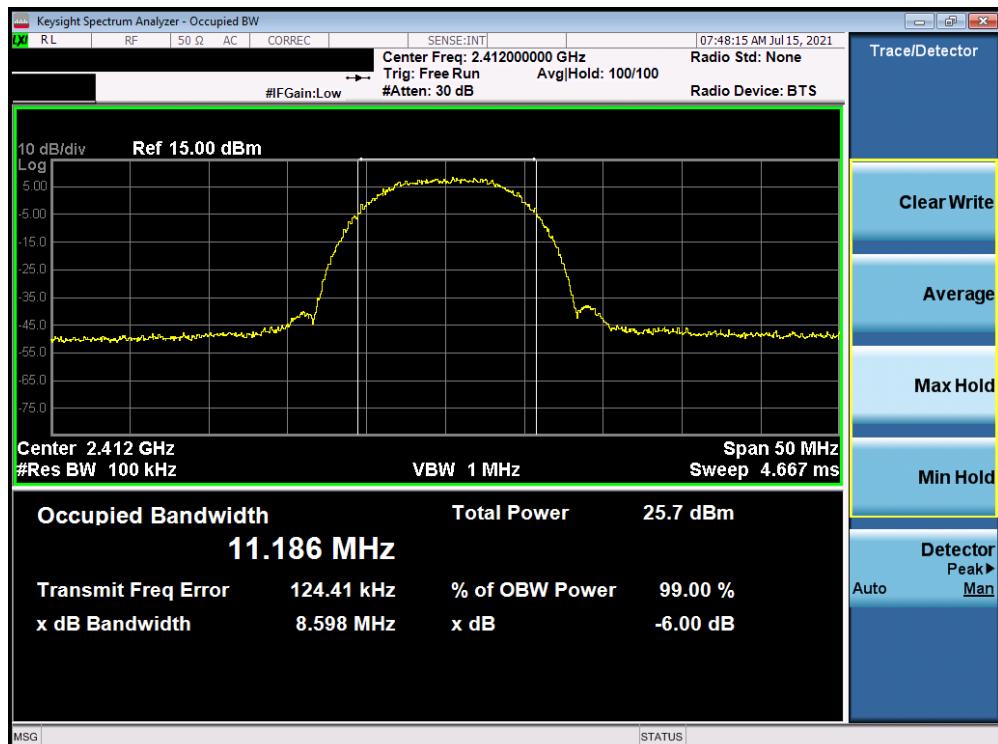


Plot 7-1: 6dB BW and 99% OBW Plot Antenna A (802.11b – Ch. 1) – 11Mbps

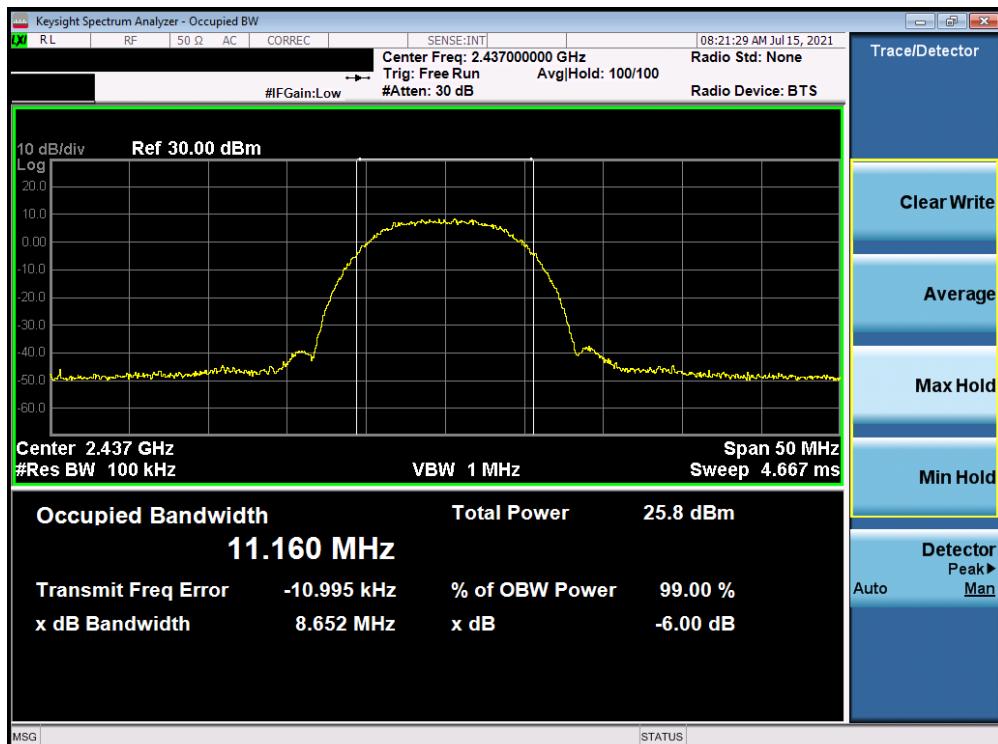


Plot 7-2. 6dB BW and 99% OBW Plot Antenna A (802.11b – Ch. 6) – 11Mbps

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 17 of 112


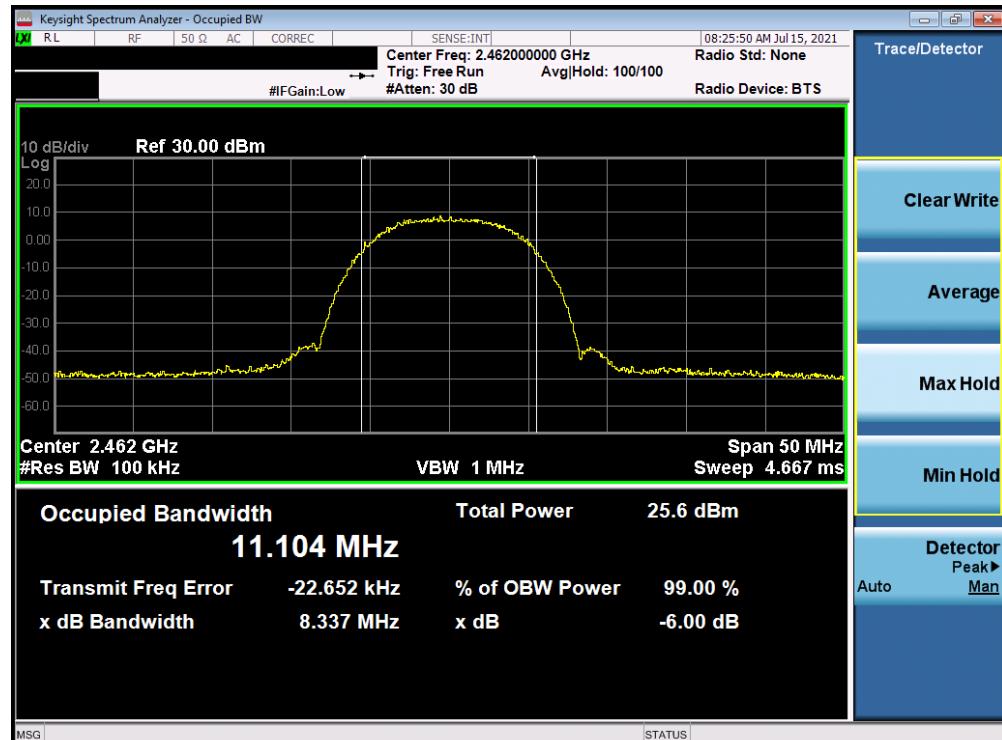


Plot 7-3. 6dB BW and 99% OBW Plot Antenna A (802.11b – Ch. 11) – 11Mbps

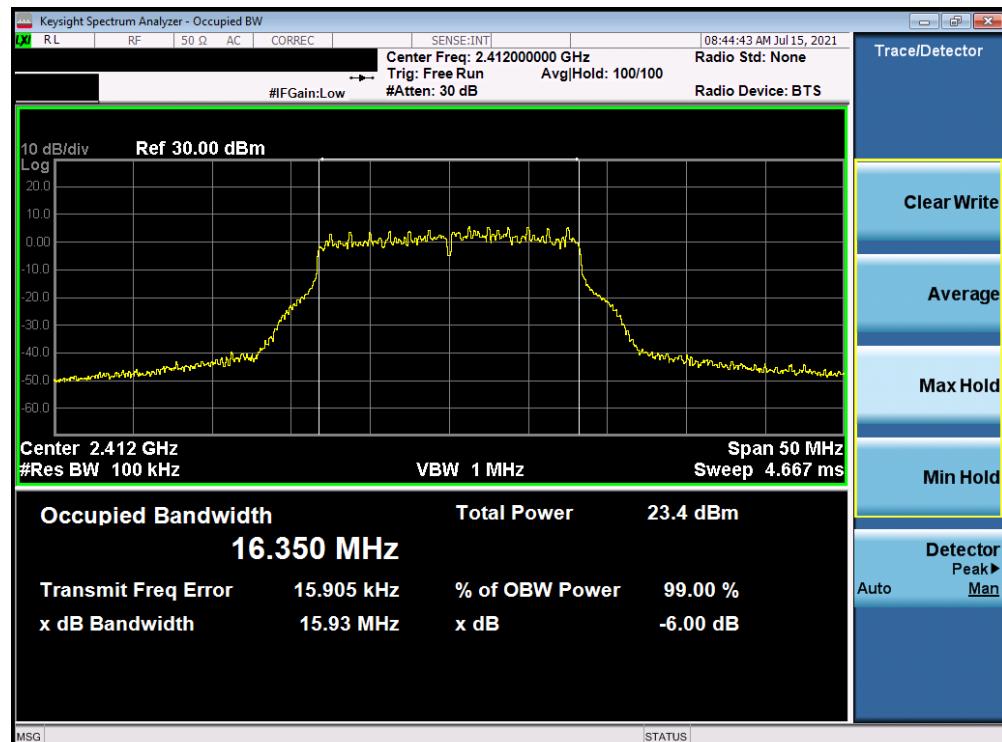

Plot 7-4. 6dB BW and 99% OBW Plot Antenna A (802.11g – Ch. 1) – 54Mbps


FCC ID: BCGA2603 IC: 579C-A2603	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 18 of 112	

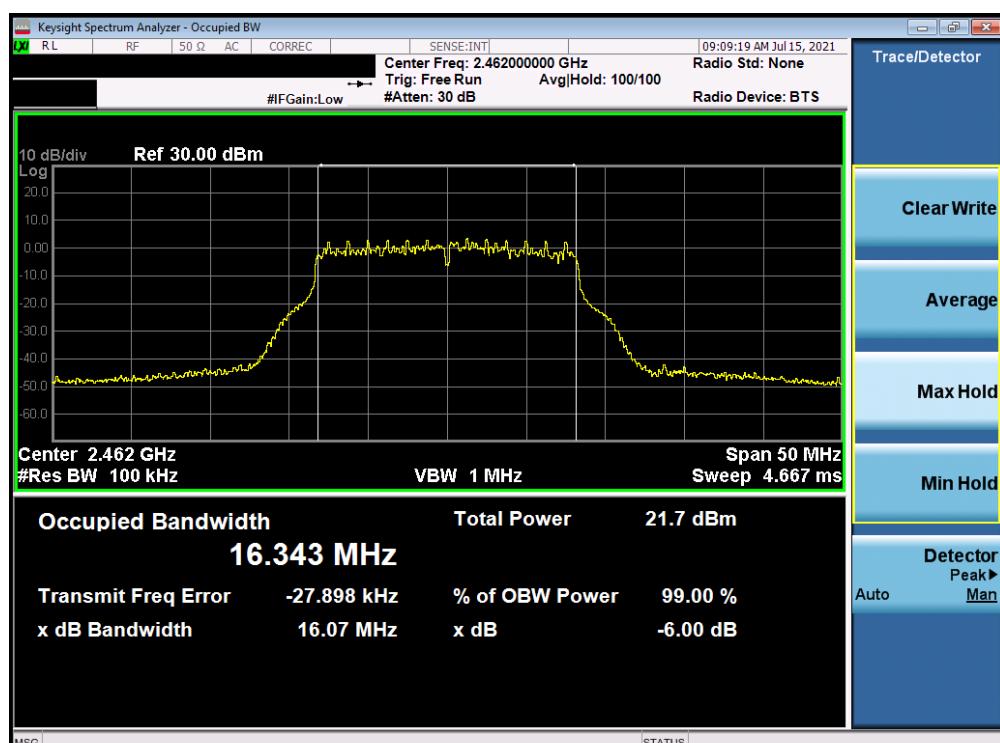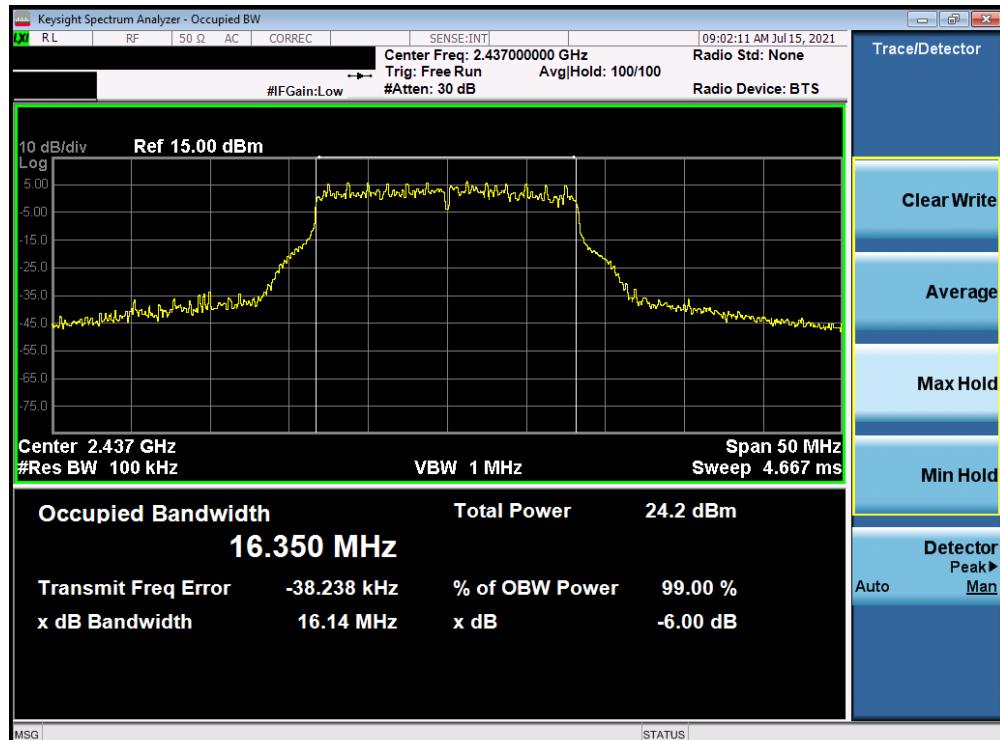

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 19 of 112




Plot 7-7. 6dB BW and 99% OBW Plot Antenna A (802.11n (2.4GHz) – Ch. 1) – MCS7

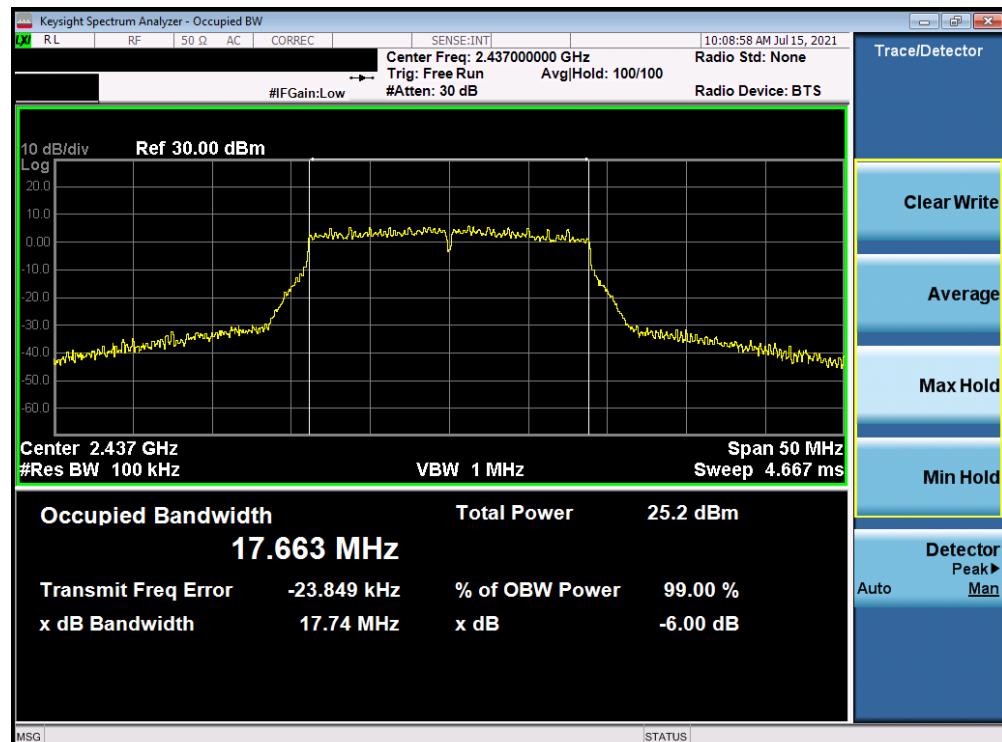

Plot 7-8. 6dB BW and 99% OBW Plot Antenna A (802.11n (2.4GHz) – Ch. 6) – MCS7

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 20 of 112

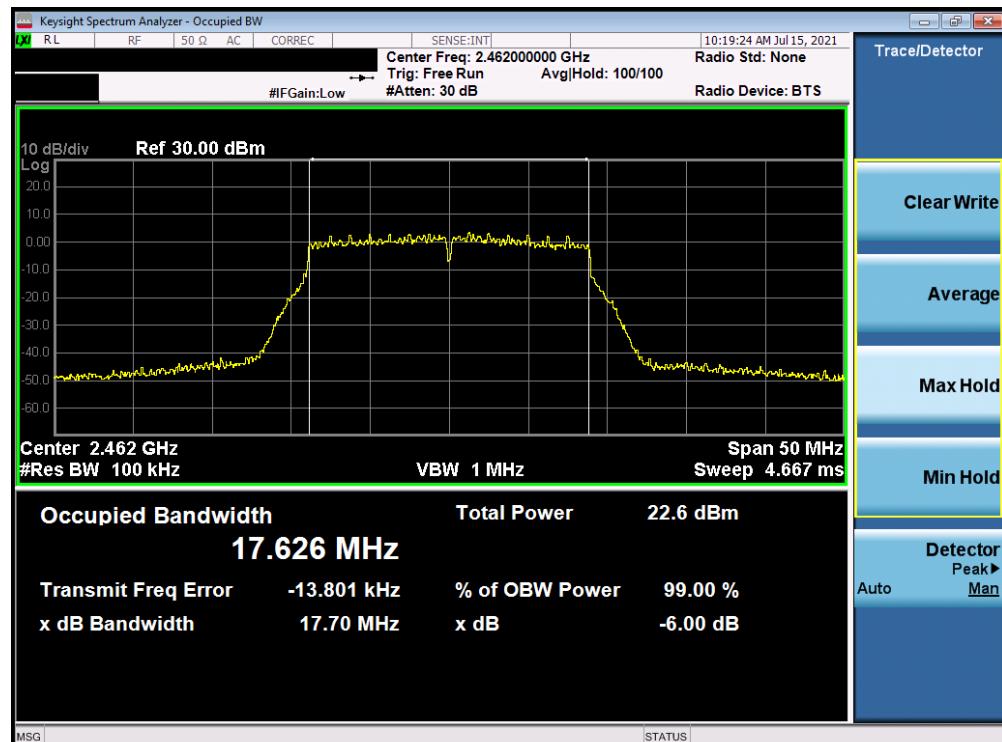

Plot 7-9. 6dB BW and 99% OBW Plot Antenna A (802.11n (2.4GHz) – Ch. 11) – MCS7


FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 21 of 112

Antenna B 6dB and 99% Bandwidth Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass / Fail
2412	1	b	11	11.105	8.436	0.500	Pass
2437	6	b	11	11.130	8.291	0.500	Pass
2462	11	b	11	11.065	8.356	0.500	Pass
2412	1	g	54	16.368	15.964	0.500	Pass
2437	6	g	54	16.339	16.124	0.500	Pass
2462	11	g	54	16.347	15.824	0.500	Pass
2412	1	n	65/72.2 (MCS7)	17.664	17.721	0.500	Pass
2437	6	n	65/72.2 (MCS7)	17.653	17.726	0.500	Pass
2462	11	n	65/72.2 (MCS7)	17.640	17.710	0.500	Pass

Table 7-3. Conducted Bandwidth Measurements Antenna B

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 22 of 112

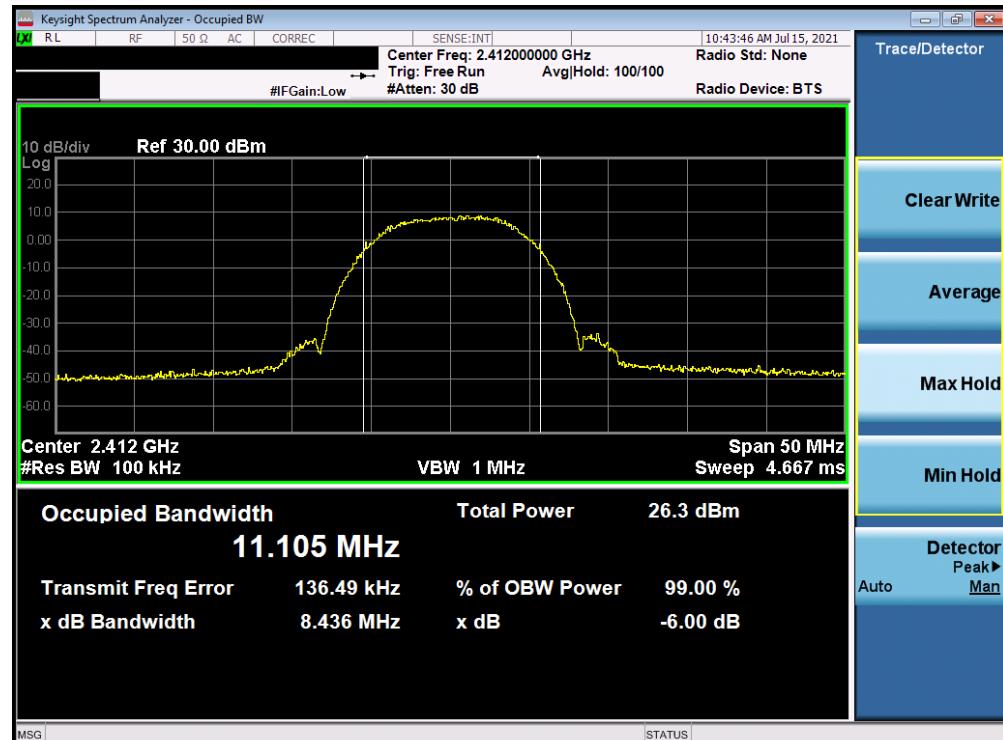


Plot 7-10: 6dB BW and 99% OBW Plot Antenna B (802.11b – Ch. 1) – 11Mbps

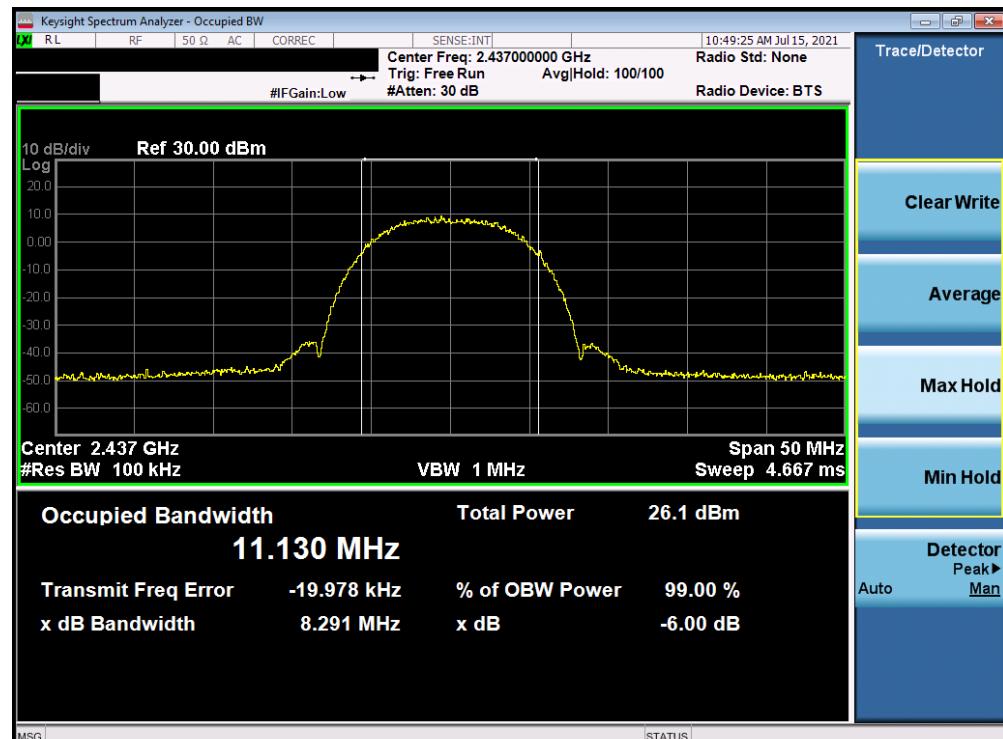


Plot 7-11. 6dB BW and 99% OBW Plot Antenna B (802.11b – Ch. 6) – 11Mbps

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 23 of 112

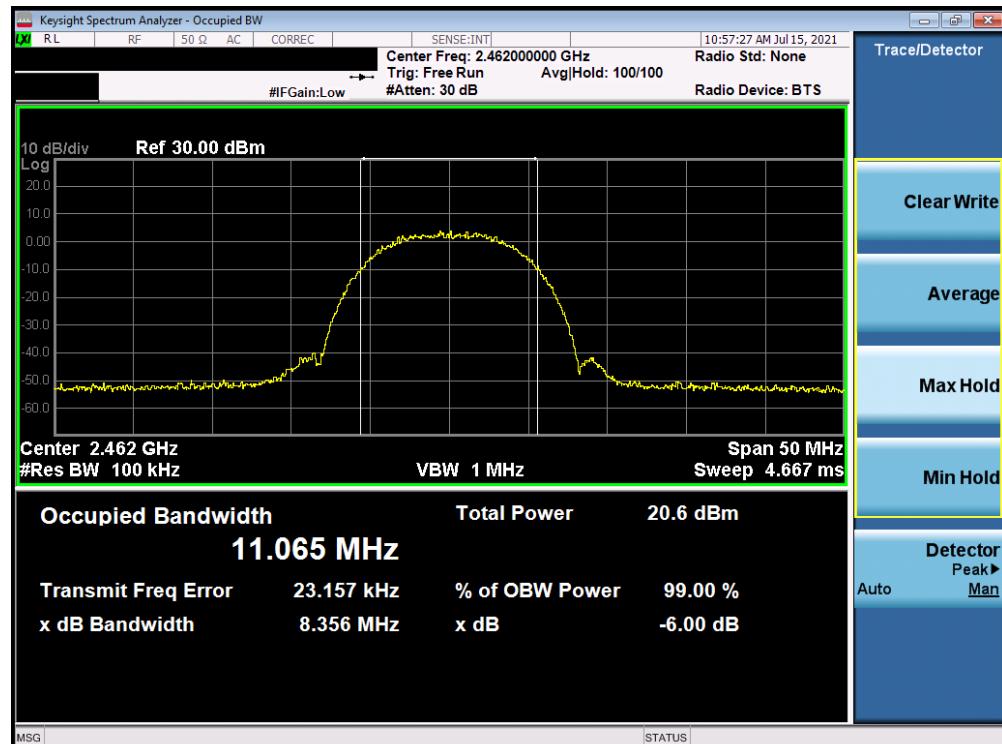


Plot 7-12. 6dB BW and 99% OBW Plot Antenna B (802.11b – Ch. 11) – 11Mbps

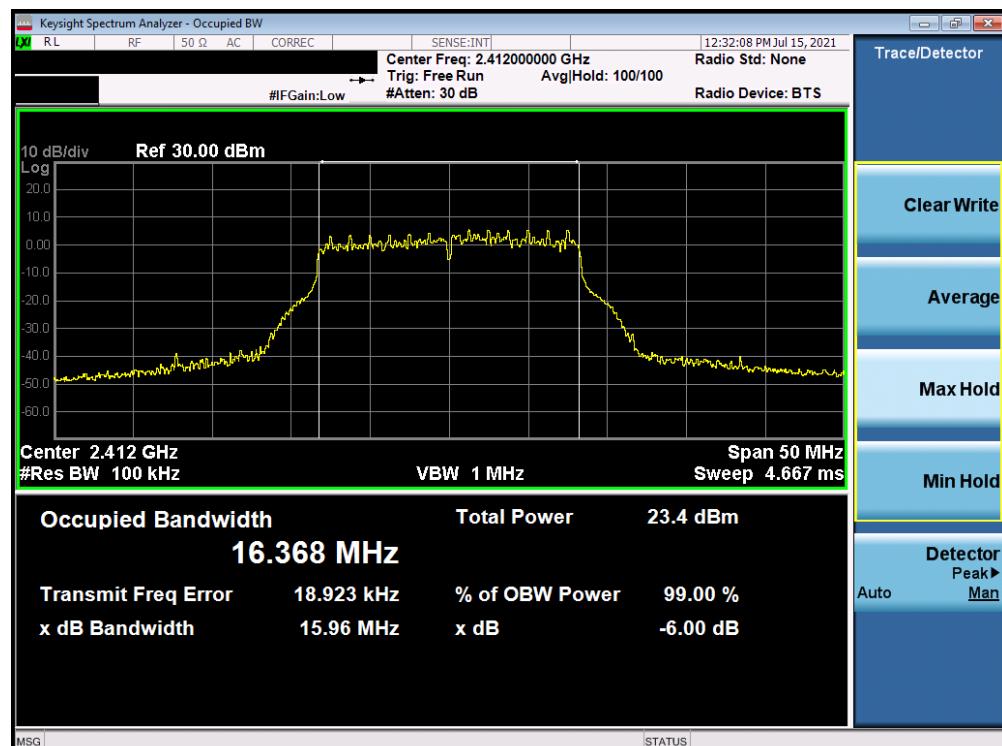


Plot 7-13. 6dB BW and 99% OBW Plot Antenna B (802.11g – Ch. 1) – 54Mbps

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 24 of 112

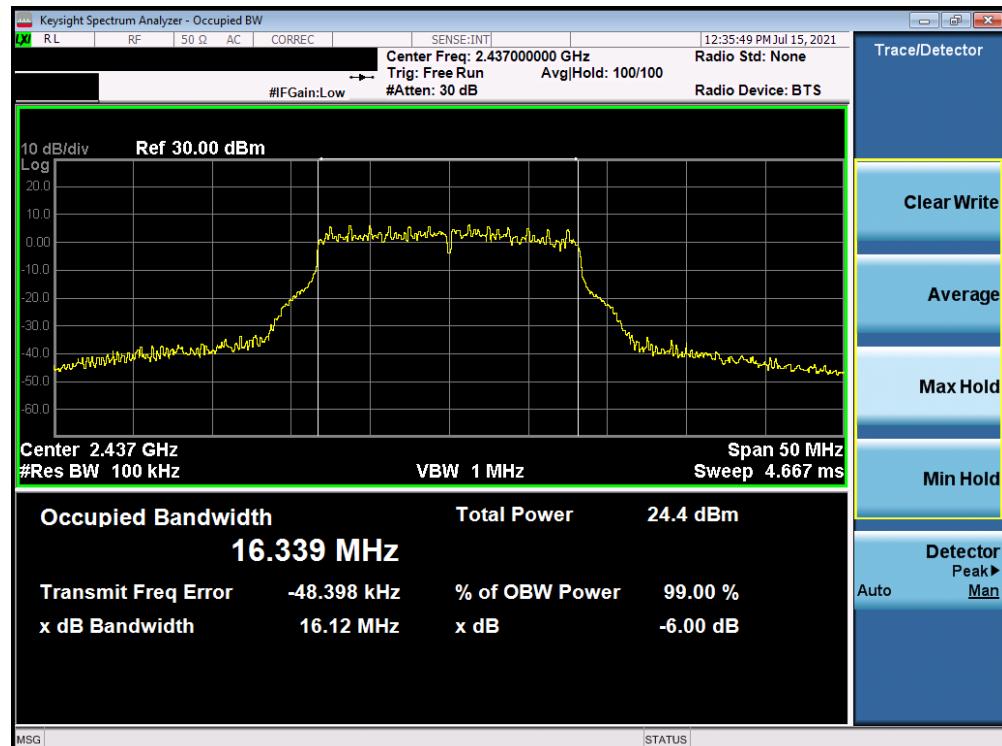


Plot 7-14. 6dB BW and 99% OBW Plot Antenna B (802.11g – Ch. 6) – 54Mbps

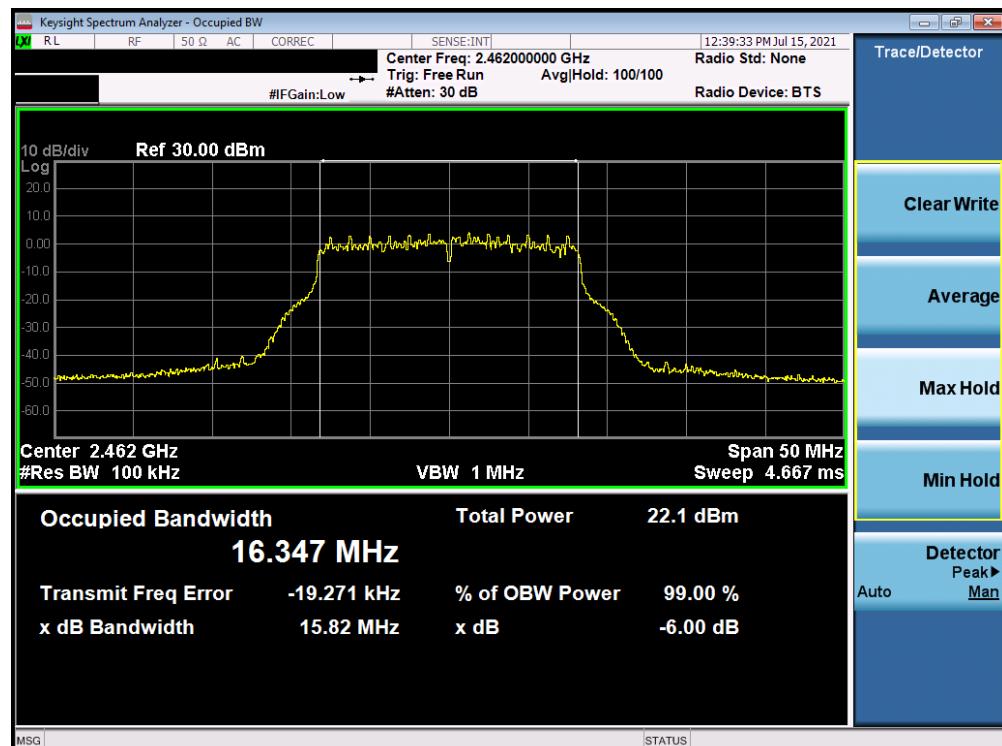


Plot 7-15. 6dB BW and 99% OBW Plot Antenna B (802.11g – Ch. 11) – 54Mbps

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 25 of 112

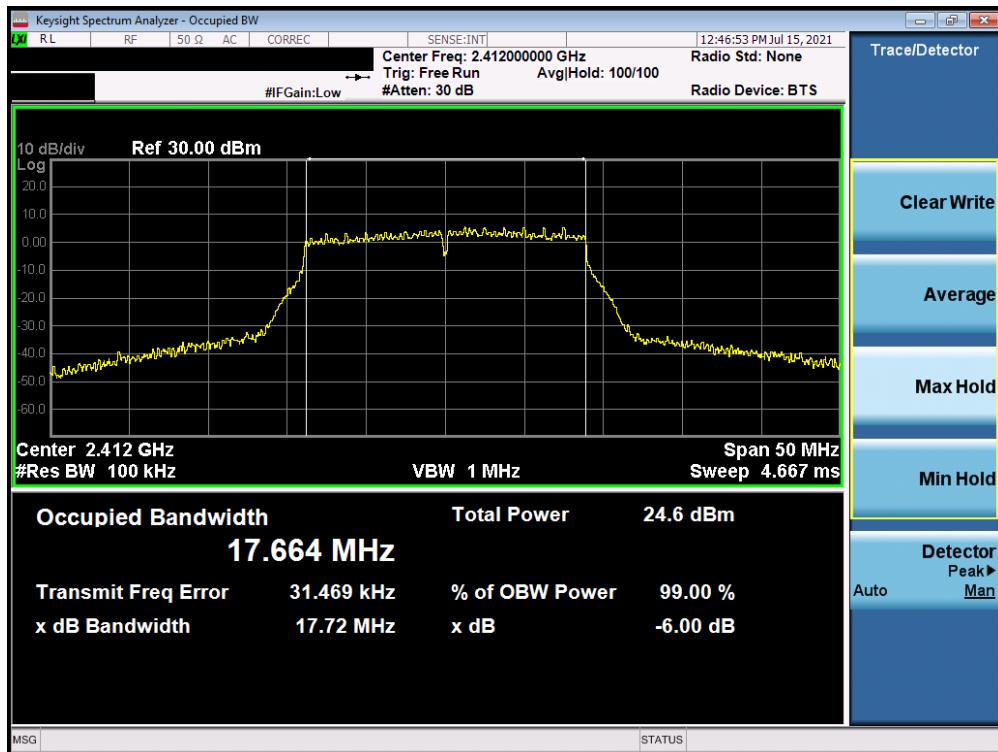


Plot 7-16. 6dB BW and 99% OBW Plot Antenna B (802.11n (2.4GHz) – Ch. 1) – MCS7

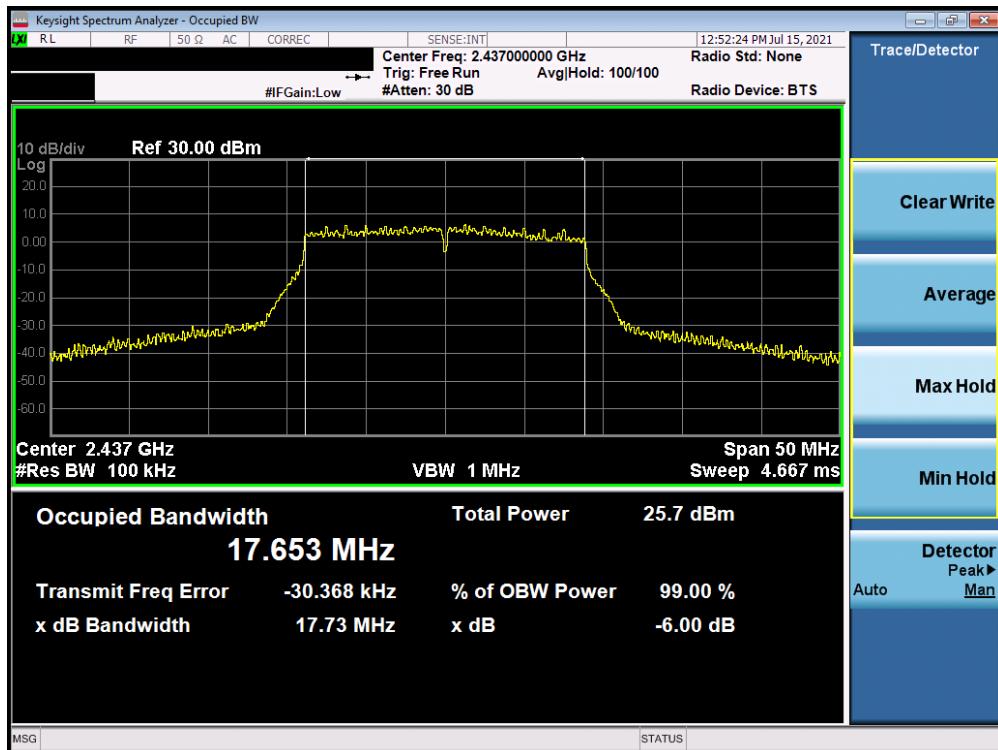

Plot 7-17. 6dB BW and 99% OBW Plot Antenna B (802.11n (2.4GHz) – Ch. 6) – MCS7

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST [®] Proud to be part of  MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 26 of 112	

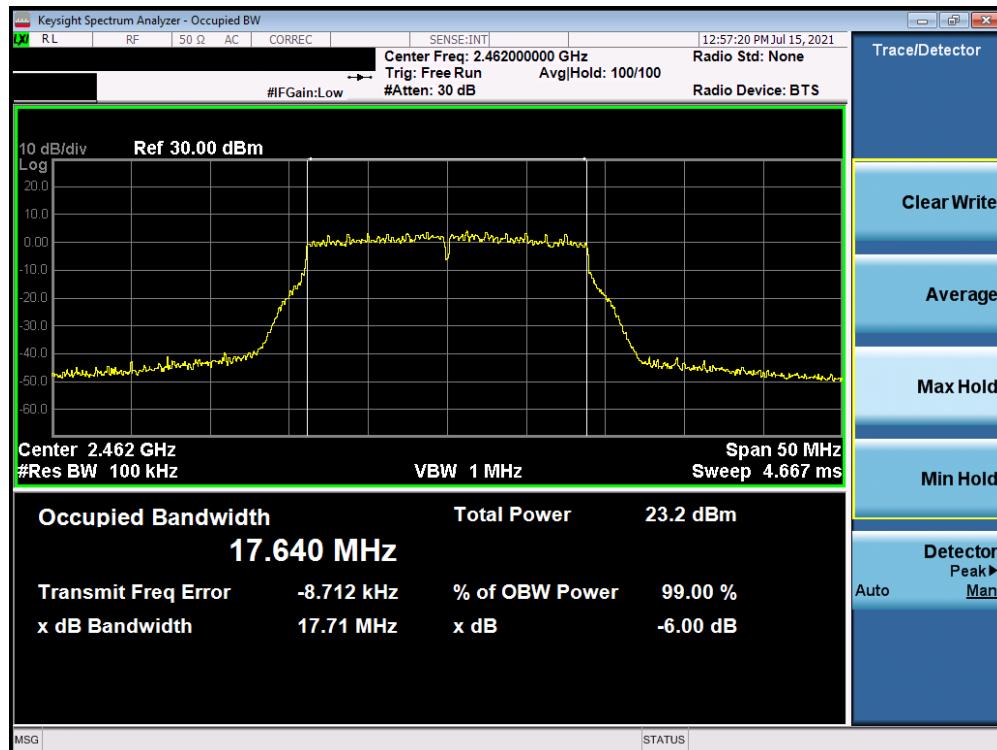

Plot 7-18. 6dB BW and 99% OBW Plot Antenna B (802.11n (2.4GHz) – Ch. 11) – MCS7

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 27 of 112

7.3 Output Power Measurement

§15.247(b.3); RSS-247 [5.4]

Test Overview and Limits

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

The maximum peak conducted output power of digital modulation systems operating in the 2400-2483.5 MHz band is 1 Watt.

The conducted output power limit on paragraph above is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For DTSs employing digital modulation techniques operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W.

Test Procedure Used

ANSI C63.10-2013 – Section 11.9.1.3 PKPM1 Peak Power Method

KDB 558074 D01 v05r02 – Section 8.3.1.3 PKPM1 Peak-reading Power Meter Method

ANSI C63.10-2013 – Section 11.9.2.3.2 Method AVGPM-G

KDB 558074 D01 v05r02 – Section 8.3.2.3 Measurement using a Power Meter (PM)

ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique

KDB 662911 D01 v02r01 – Section E(1) Measure-and-Sum Technique

Test Settings

Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.



Figure 7-2. Test Instrument & Measurement Setup for Power Meter Measurements

Test Notes

None.

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST[®] Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 - 07/23/2021	EUT Type: Tablet Device		Page 28 of 112

7.3.1 Average Output Power Measurement

§15.247(b.3); RSS-247 [5.4]

Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
			802.11b	802.11g	802.11n						
2412	1	AVG	15.79	14.84	14.79	30.00	-14.21	1.91	17.70	36.02	-18.32
2417	2	AVG	15.77	15.92	15.89	30.00	-14.08	1.91	17.83	36.02	-18.19
2437	6	AVG	15.97	15.90	15.96	30.00	-14.03	1.91	17.88	36.02	-18.14
2457	10	AVG	15.78	15.85	15.97	30.00	-14.03	1.91	17.88	36.02	-18.14
2462	11	AVG	15.81	13.81	13.99	30.00	-14.19	1.91	17.72	36.02	-18.30
2467	12	AVG	15.93	10.88	10.86	30.00	-14.07	1.91	17.84	36.02	-18.18
2472	13	AVG	13.92	2.00	1.99	30.00	-16.08	1.91	15.83	36.02	-20.19

Table 7-4. Average Conducted Output Power Measurements Antenna A

Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
			802.11b	802.11g	802.11n						
2412	1	AVG	16.00	14.97	14.81	30.00	-14.00	0.56	16.56	36.02	-19.46
2417	2	AVG	15.90	15.88	15.95	30.00	-14.05	0.56	16.51	36.02	-19.51
2437	6	AVG	15.80	15.85	15.98	30.00	-14.02	0.56	16.54	36.02	-19.48
2457	10	AVG	15.92	15.90	15.80	30.00	-14.08	0.56	16.48	36.02	-19.54
2462	11	AVG	15.91	14.00	13.92	30.00	-14.09	0.56	16.47	36.02	-19.55
2467	12	AVG	15.92	10.83	11.00	30.00	-14.08	0.56	16.48	36.02	-19.54
2472	13	AVG	13.75	1.83	1.72	30.00	-16.25	0.56	14.31	36.02	-21.71

Table 7-5. Average Conducted Output Power Measurements Antenna B

Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
			Antenna A	Antenna B	Summed						
2412	1	AVG	13.50	13.38	16.45	30.00	-13.55	4.27	20.72	36.02	-15.30
2417	2	AVG	15.80	15.98	18.90	30.00	-11.10	4.27	23.17	36.02	-12.85
2437	6	AVG	15.91	15.89	18.91	30.00	-11.09	4.27	23.18	36.02	-12.84
2457	10	AVG	15.84	15.94	18.90	30.00	-11.10	4.27	23.17	36.02	-12.85
2462	11	AVG	12.83	12.96	15.91	30.00	-14.09	4.27	20.18	36.02	-15.84
2467	12	AVG	9.91	9.79	12.86	30.00	-17.14	4.27	17.13	36.02	-18.89
2472	13	AVG	-0.24	-0.09	2.85	30.00	-27.15	4.27	7.12	36.02	-28.90

Table 7-6. Average Conducted Output Power Measurements CDD (802.11g)

Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
			Antenna A	Antenna B	Summed						
2412	1	AVG	13.31	13.20	16.27	30.00	-13.73	4.27	20.54	36.02	-15.48
2417	2	AVG	15.98	15.78	18.89	30.00	-11.11	4.27	23.16	36.02	-12.86
2437	6	AVG	15.80	15.91	18.87	30.00	-11.13	4.27	23.14	36.02	-12.88
2457	10	AVG	15.99	15.84	18.93	30.00	-11.07	4.27	23.20	36.02	-12.82
2462	11	AVG	12.95	12.87	15.92	30.00	-14.08	4.27	20.19	36.02	-15.83
2467	12	AVG	9.97	9.78	12.89	30.00	-17.11	4.27	17.16	36.02	-18.86
2472	13	AVG	-0.10	-0.22	2.85	30.00	-27.15	4.27	7.12	36.02	-28.90

Table 7-7. Average Conducted Output Power Measurements CDD (802.11n)

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 29 of 112

7.3.2 Peak Output Power Measurement

§15.247(b.3); RSS-247 [5.4]

Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
			802.11b	802.11g	802.11n						
2412	1	PEAK	19.90	24.14	24.80	30.00	-5.20	1.91	26.71	36.02	-9.31
2417	2	PEAK	19.48	24.83	25.49	30.00	-4.51	1.91	27.40	36.02	-8.62
2437	6	PEAK	19.70	25.10	26.15	30.00	-3.85	1.91	28.06	36.02	-7.96
2457	10	PEAK	19.50	24.79	25.73	30.00	-4.27	1.91	27.64	36.02	-8.38
2462	11	PEAK	19.53	23.56	24.88	30.00	-5.12	1.91	26.79	36.02	-9.23
2467	12	PEAK	19.65	20.30	22.40	30.00	-7.60	1.91	24.31	36.02	-11.71
2472	13	PEAK	17.85	11.61	13.15	30.00	-12.15	1.91	19.76	36.02	-16.26

Table 7-8. Peak Conducted Output Power Measurements Antenna A

Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
			802.11b	802.11g	802.11n						
2412	1	PEAK	19.79	24.35	25.35	30.00	-4.65	0.56	25.91	36.02	-10.11
2417	2	PEAK	19.78	25.00	26.05	30.00	-3.95	0.56	26.61	36.02	-9.41
2437	6	PEAK	19.59	25.29	26.37	30.00	-3.63	0.56	26.93	36.02	-9.09
2457	10	PEAK	19.91	25.02	26.19	30.00	-3.81	0.56	26.75	36.02	-9.27
2462	11	PEAK	19.91	23.48	25.17	30.00	-4.83	0.56	25.73	36.02	-10.29
2467	12	PEAK	19.64	20.45	22.80	30.00	-7.20	0.56	23.36	36.02	-12.66
2472	13	PEAK	17.62	11.18	13.23	30.00	-12.38	0.56	18.18	36.02	-17.84

Table 7-9. Peak Conducted Output Power Measurements Antenna B

Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
			Antenna A	Antenna B	Summed						
2412	1	PEAK	22.57	22.56	25.58	30.00	-4.42	4.27	29.85	36.02	-6.17
2417	2	PEAK	24.22	24.27	27.26	30.00	-2.74	4.27	31.53	36.02	-4.49
2437	6	PEAK	24.37	24.32	27.36	30.00	-2.64	4.27	31.63	36.02	-4.39
2457	10	PEAK	24.27	24.29	27.29	30.00	-2.71	4.27	31.56	36.02	-4.46
2462	11	PEAK	22.04	22.10	25.08	30.00	-4.92	4.27	29.35	36.02	-6.67
2467	12	PEAK	18.92	18.84	21.89	30.00	-8.11	4.27	26.16	36.02	-9.86
2472	13	PEAK	8.81	8.95	11.89	30.00	-18.11	4.27	16.16	36.02	-19.86

Table 7-10. Peak Conducted Output Power Measurements CDD (802.11g)

Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
			Antenna A	Antenna B	Summed						
2412	1	PEAK	22.58	22.39	25.50	30.00	-4.50	4.27	29.77	36.02	-6.25
2417	2	PEAK	24.42	24.29	27.37	30.00	-2.63	4.27	31.64	36.02	-4.38
2437	6	PEAK	24.54	24.44	27.50	30.00	-2.50	4.27	31.77	36.02	-4.25
2457	10	PEAK	24.63	24.41	27.53	30.00	-2.47	4.27	31.80	36.02	-4.22
2462	11	PEAK	22.46	22.25	25.37	30.00	-4.63	4.27	29.64	36.02	-6.38
2467	12	PEAK	14.49	19.16	20.43	30.00	-9.57	4.27	24.70	36.02	-11.32
2472	13	PEAK	9.48	9.29	12.40	30.00	-17.60	4.27	16.67	36.02	-19.35

Table 7-11. Peak Conducted Output Power Measurements CDD (802.11n)

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 30 of 112

Note:

Per ANSI C63.10-2013 and KDB 662911 D01 v02r01 Section E(1), the conducted powers at Antenna A and Antenna B were first measured separately during CDD transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

Sample CDD Calculation:

At 2412MHz, the average conducted output power was measured to be 13.31 dBm for Antenna A and 13.20 dBm for Antenna B.

$$\text{Antenna A} + \text{Antenna B} = \text{CDD}$$

$$(13.31 \text{ dBm} + 13.20 \text{ dBm}) = (21.43 \text{ mW} + 20.89 \text{ mW}) = 42.32 \text{ mW} = 16.27 \text{ dBm}$$

Sample e.i.r.p. Calculation:

At 2412MHz, the average conducted output power was calculated to be 15.34 dBm with directional gain of 4.27 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Antenna gain (dBi)}$$

$$16.27 \text{ dBm} + 4.27 \text{ dBi} = 20.54 \text{ dBm}$$

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST [®] Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 31 of 112

7.4 Power Spectral Density

§15.247(e); RSS-247 [5.2]

Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The maximum permissible power spectral density is 8 dBm in any 3 kHz band.

Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD

KDB 558074 D01 v05r02 – Section 8.4 DTS Maximum Power Spectral Density level in the fundamental emission

ANSI C63.10-2013 – Section 14.3.2.2 Measure-and-Sum Technique

KDB 662911 D01 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 1MHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

All data rates were investigated and only the worst case is reported.


FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST[®] Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device		Page 32 of 112

Antenna A Power Spectral Density Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Spectral Density [dBm / 3kHz]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	b	11	-5.83	8.00	-13.83	Pass
2437	6	b	11	-5.77	8.00	-13.77	Pass
2462	11	b	11	-5.87	8.00	-13.87	Pass
2412	1	g	54	-10.37	8.00	-18.37	Pass
2437	6	g	54	-9.60	8.00	-17.60	Pass
2462	11	g	54	-12.14	8.00	-20.14	Pass
2412	1	n	65/72.2 (MCS7)	-7.29	8.00	-15.29	Pass
2437	6	n	65/72.2 (MCS7)	-6.61	8.00	-14.61	Pass
2462	11	n	65/72.2 (MCS7)	-9.49	8.00	-17.49	Pass

Table 7-12. Conducted Power Density Measurements Antenna A

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 33 of 112

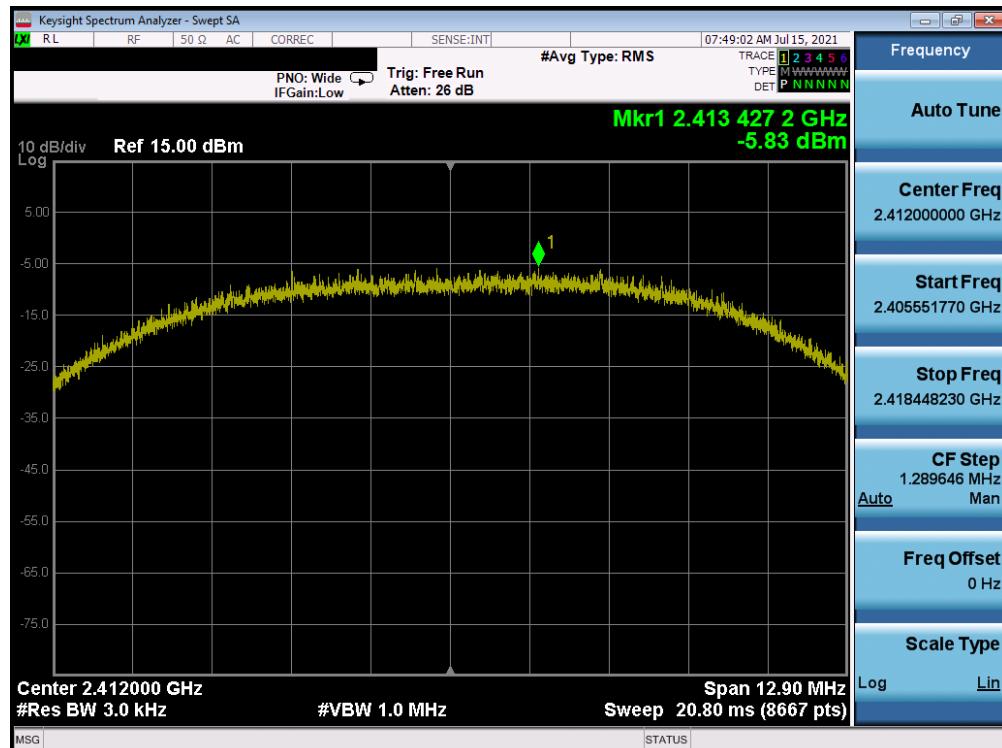


Plot 7-19. Power Spectral Density Plot Antenna A (802.11b – Ch. 1) – 11Mbps

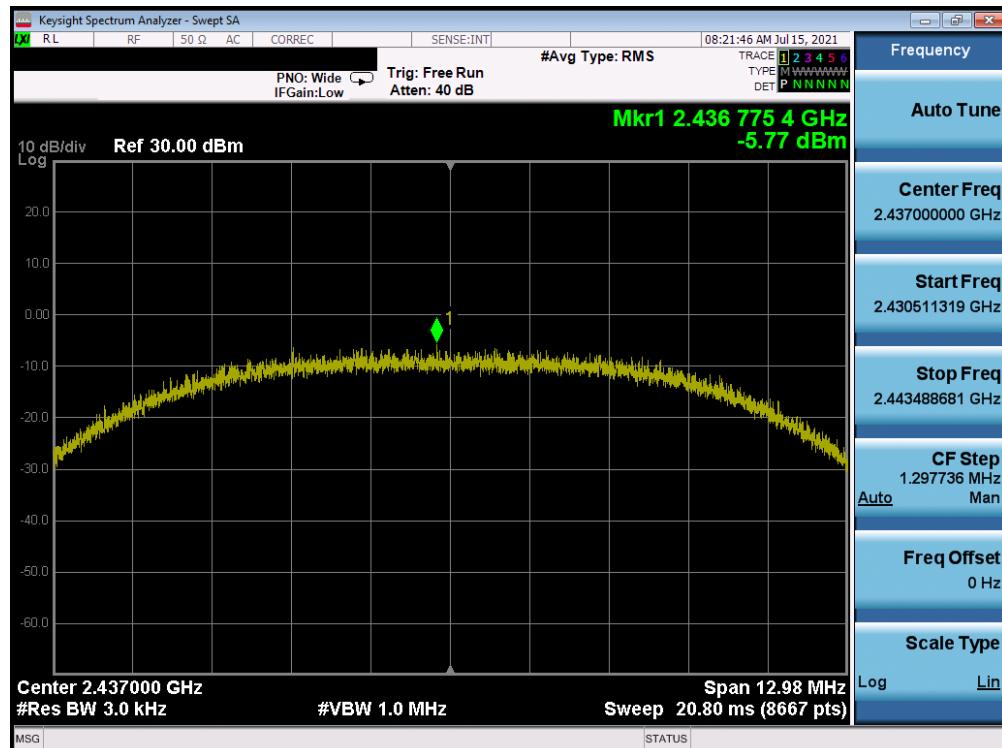


Plot 7-20. Power Spectral Density Plot Antenna A (802.11b – Ch. 6) – 11Mbps

FCC ID: BCGA2603 IC: 579C-A2603	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 34 of 112	

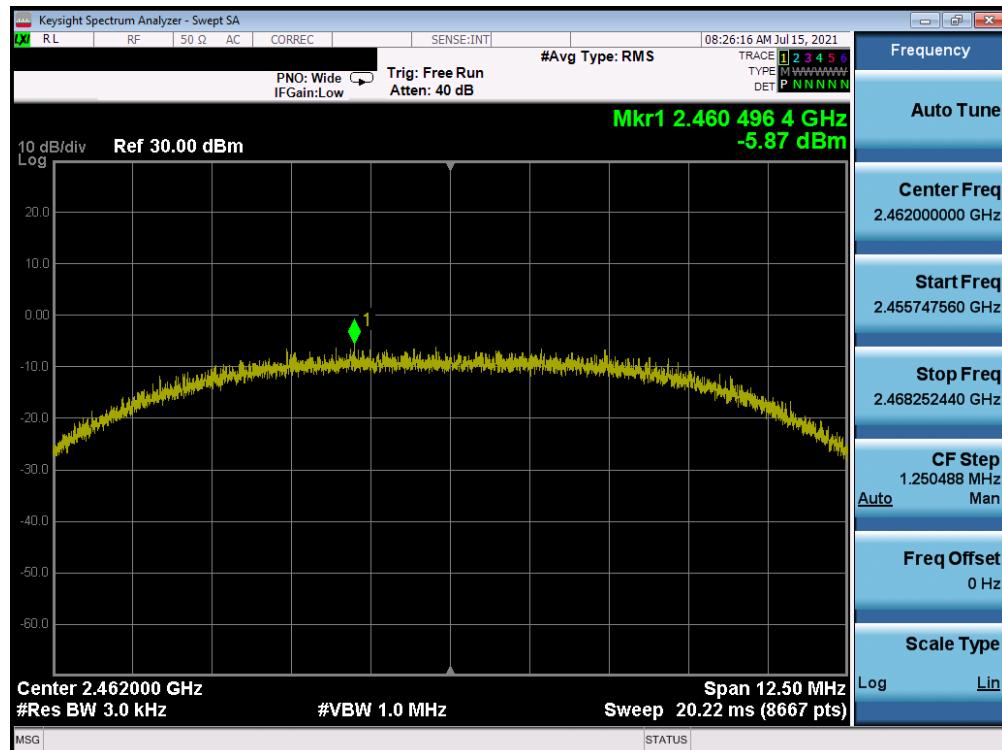


Plot 7-21. Power Spectral Density Plot Antenna A (802.11b – Ch. 11) – 11Mbps

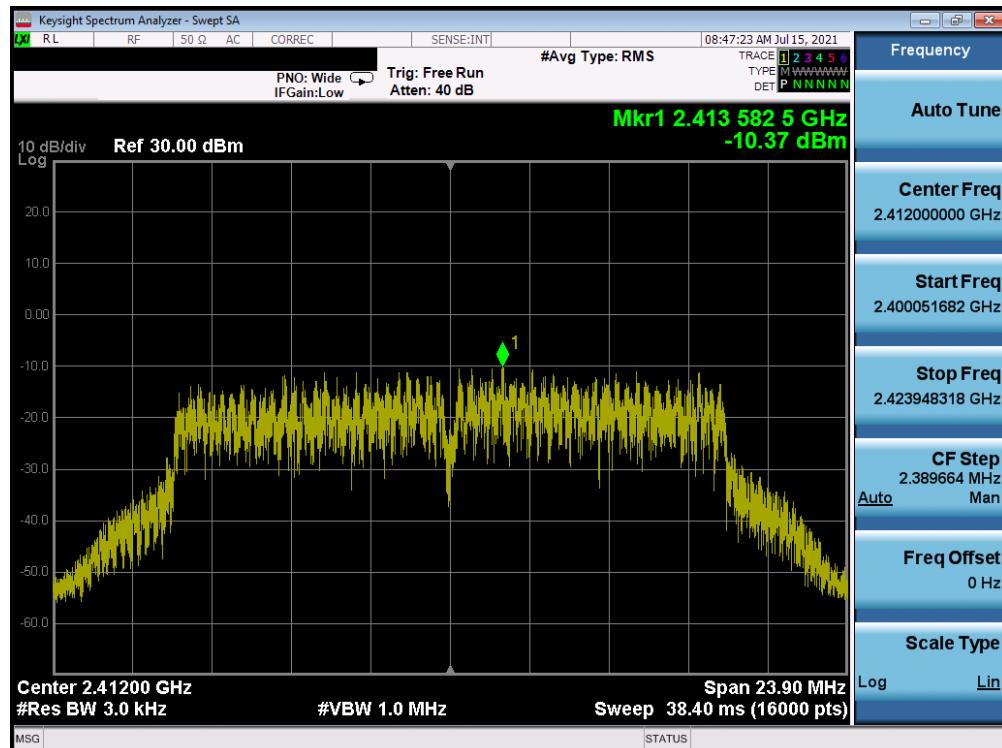


Plot 7-22. Power Spectral Density Plot Antenna A (802.11g – Ch. 1) – 54Mbps

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 35 of 112

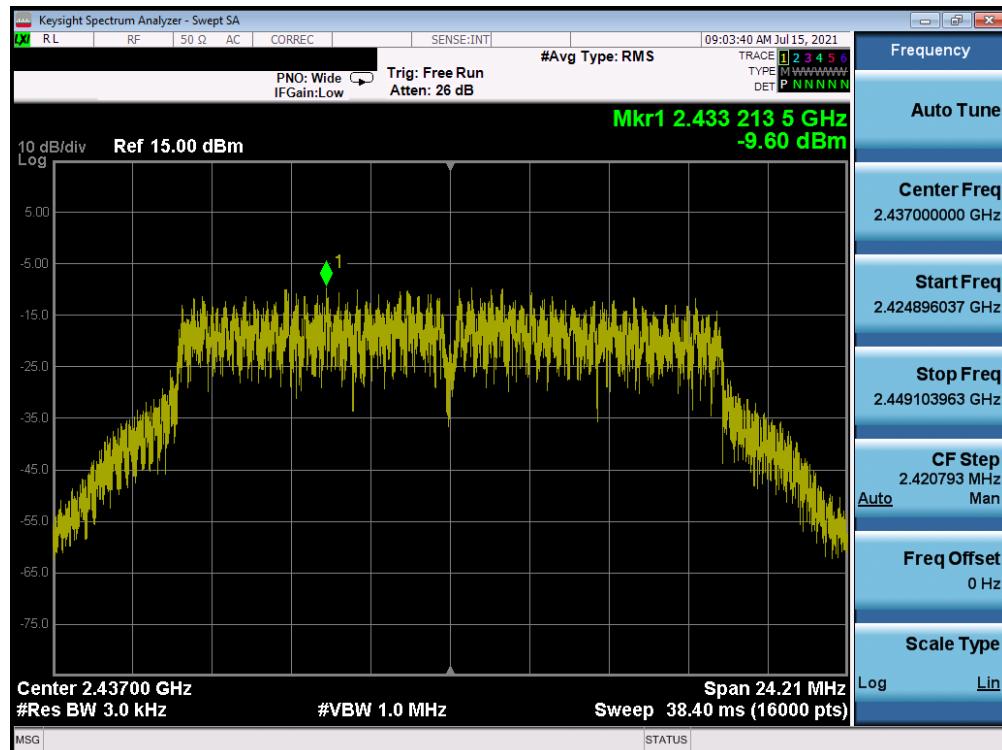


Plot 7-23. Power Spectral Density Plot Antenna A (802.11g – Ch. 6) – 54Mbps

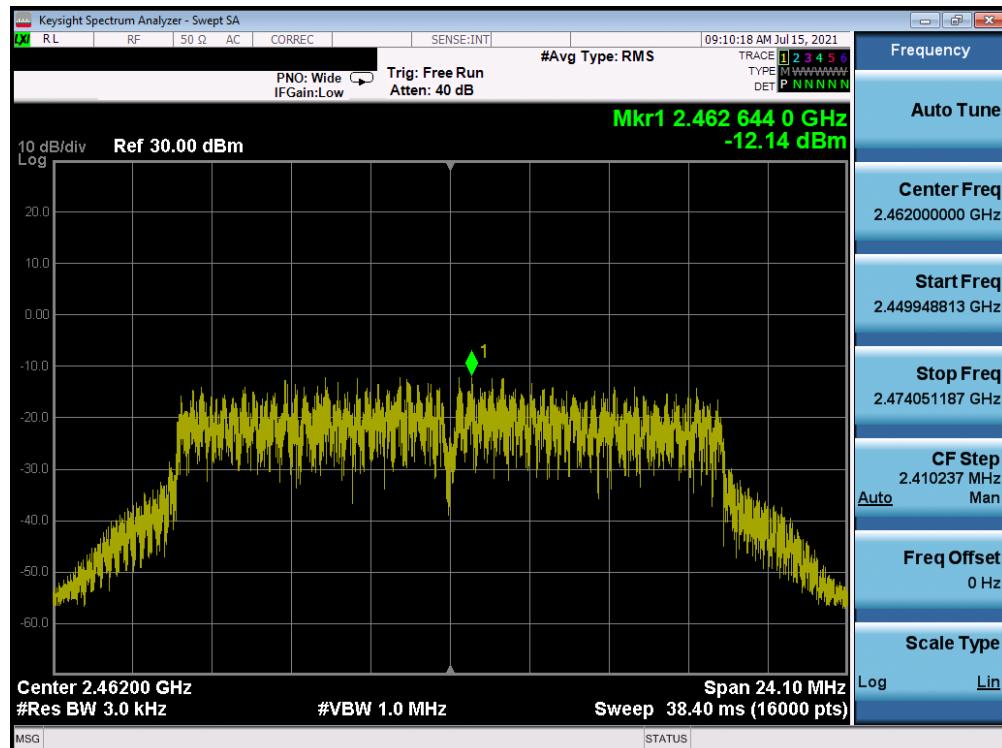


Plot 7-24. Power Spectral Density Plot Antenna A (802.11g – Ch. 11) – 54Mbps

FCC ID: BCGA2603 IC: 579C-A2603	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 36 of 112	

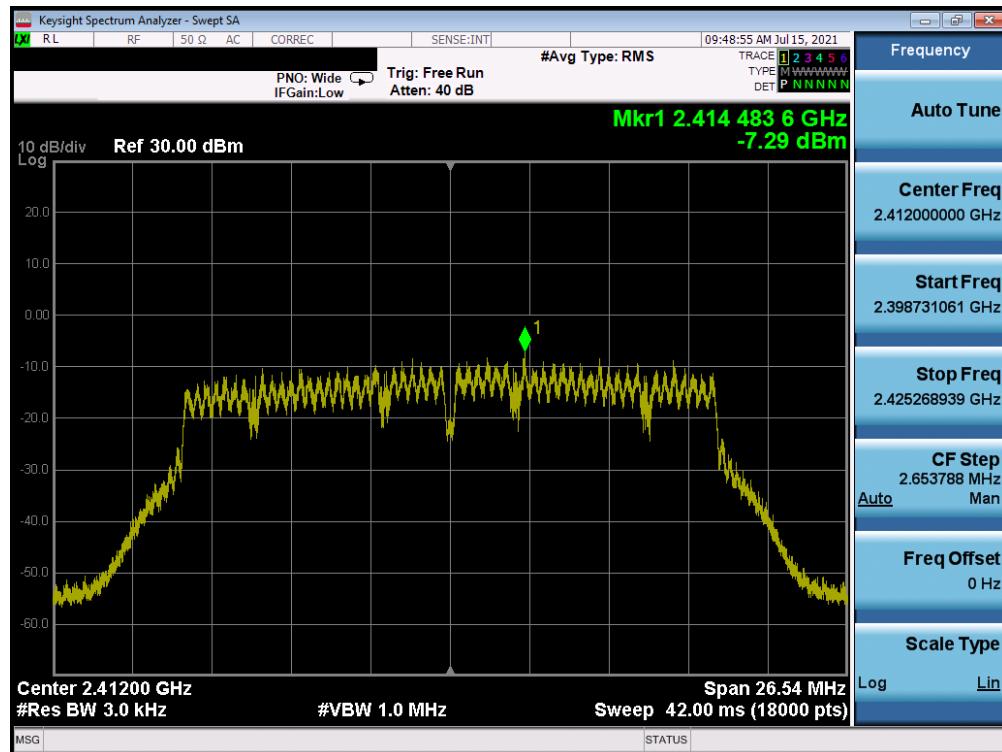


Plot 7-25. Power Spectral Density Plot Antenna A (802.11n (2.4GHz) – Ch. 1) – MCS7

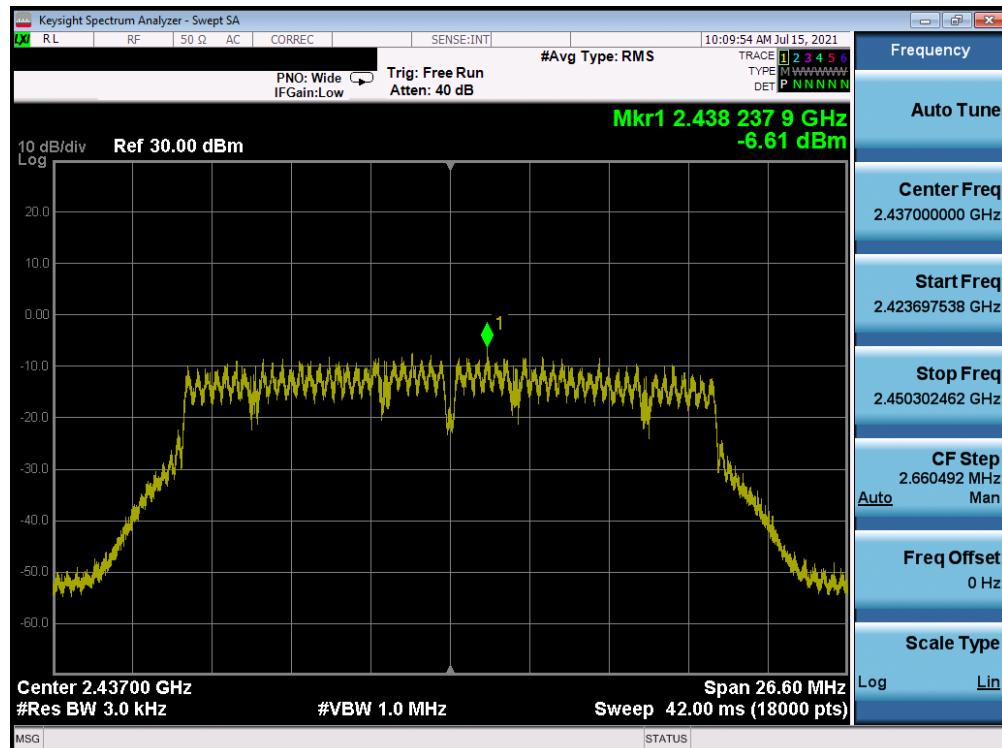

Plot 7-26. Power Spectral Density Plot Antenna A (802.11n (2.4GHz) – Ch. 6) – MCS7

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 37 of 112

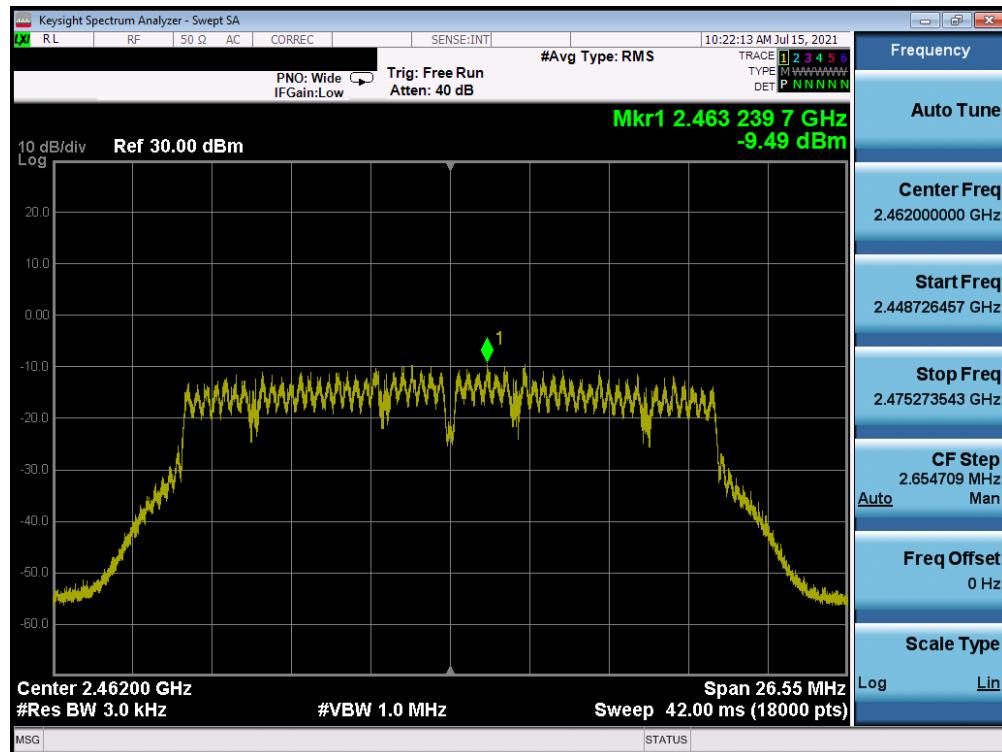

Plot 7-27. Power Spectral Density Plot Antenna A (802.11n (2.4GHz) – Ch. 11) – MCS7


FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 38 of 112

Antenna B Power Spectral Density Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Spectral Density [dBm / 3kHz]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	b	11	-5.50	8.00	-13.50	Pass
2437	6	b	11	-5.17	8.00	-13.17	Pass
2462	11	b	11	-5.58	8.00	-13.58	Pass
2412	1	g	54	-10.49	8.00	-18.49	Pass
2437	6	g	54	-8.88	8.00	-16.88	Pass
2462	11	g	54	-11.41	8.00	-19.41	Pass
2412	1	n	65/72.2 (MCS7)	-7.21	8.00	-15.21	Pass
2437	6	n	65/72.2 (MCS7)	-7.04	8.00	-15.04	Pass
2462	11	n	65/72.2 (MCS7)	-8.97	8.00	-16.97	Pass

Table 7-13. Conducted Power Density Measurements Antenna B

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 39 of 112

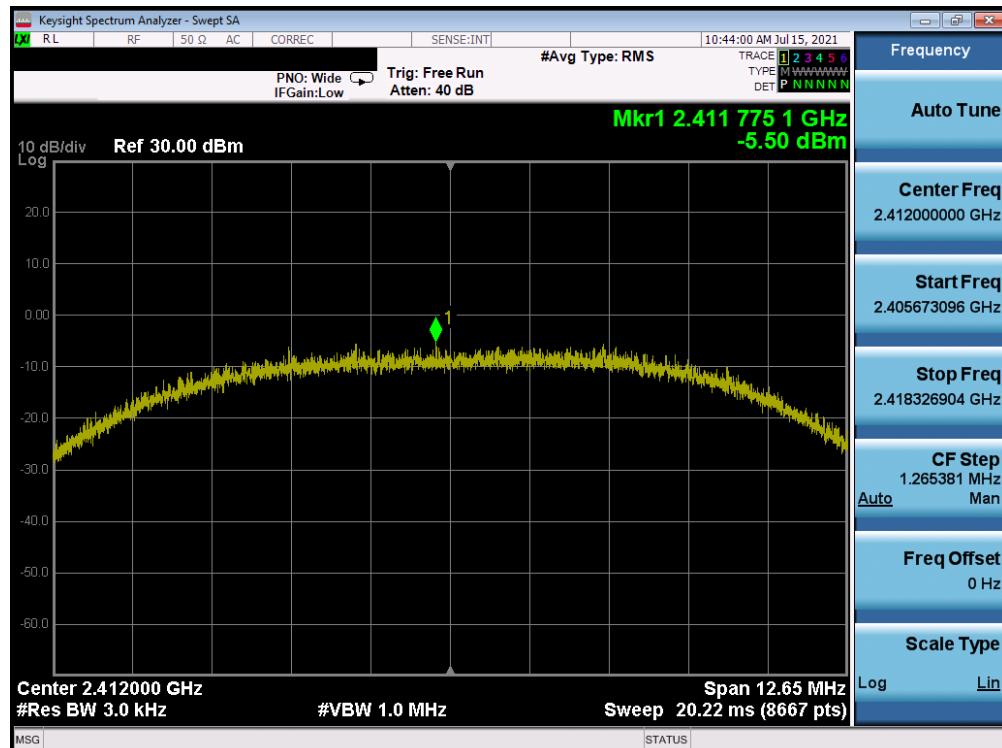


Plot 7-28. Power Spectral Density Plot Antenna B (802.11b – Ch. 1) – 11Mbps

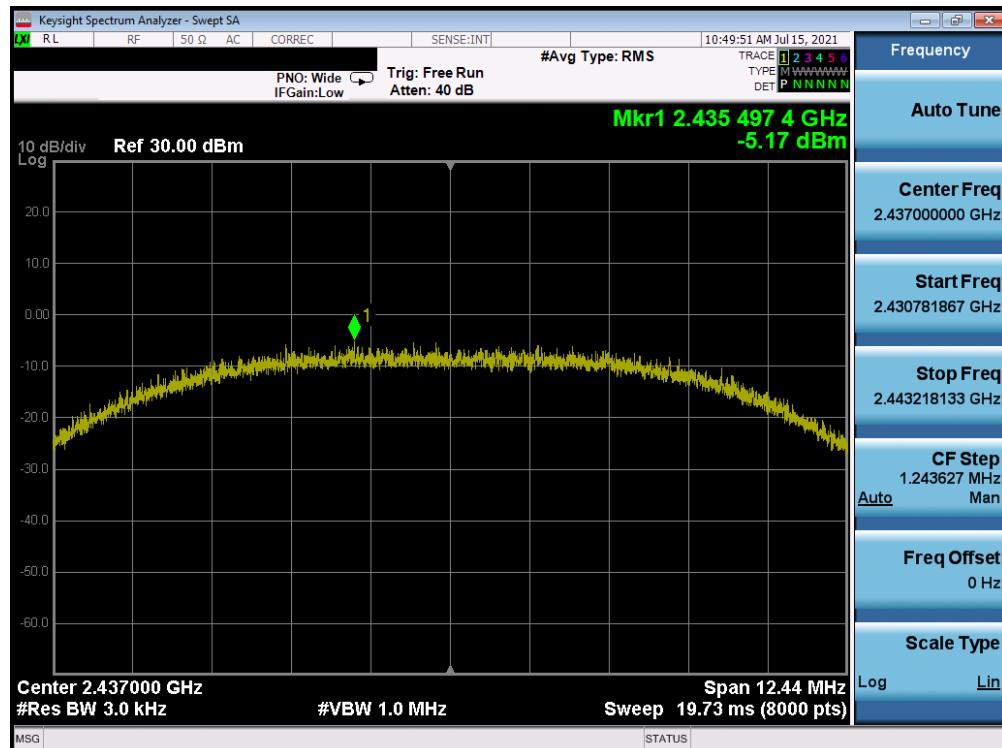


Plot 7-29. Power Spectral Density Plot Antenna B (802.11b – Ch. 6) – 11Mbps

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 40 of 112

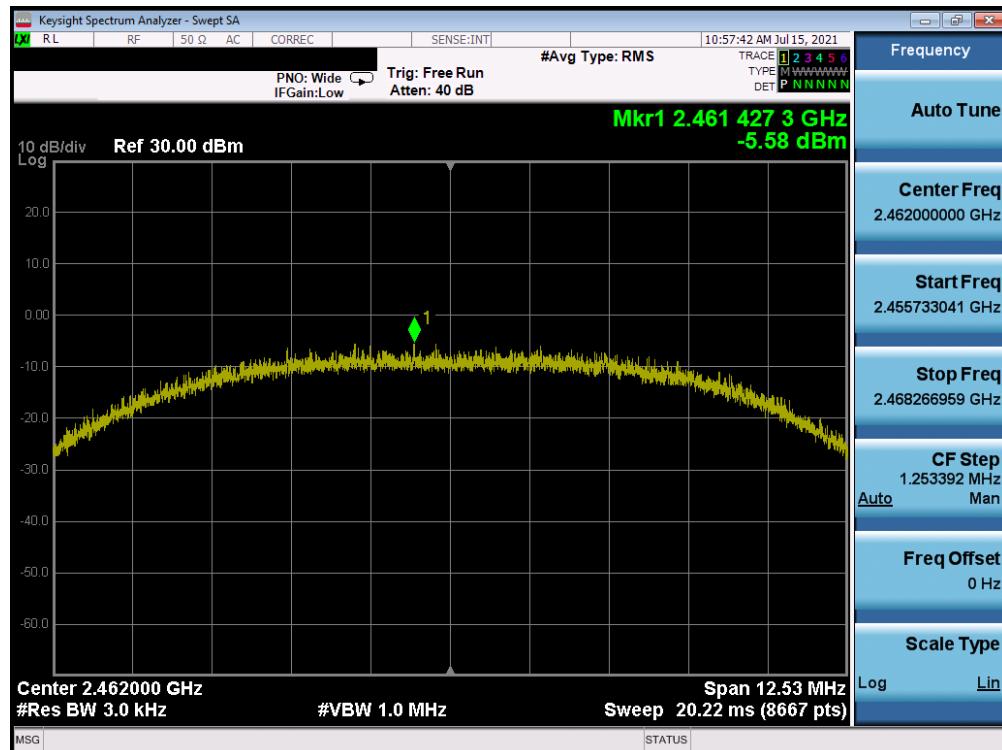


Plot 7-30. Power Spectral Density Plot Antenna B (802.11b – Ch. 11) – 11Mbps

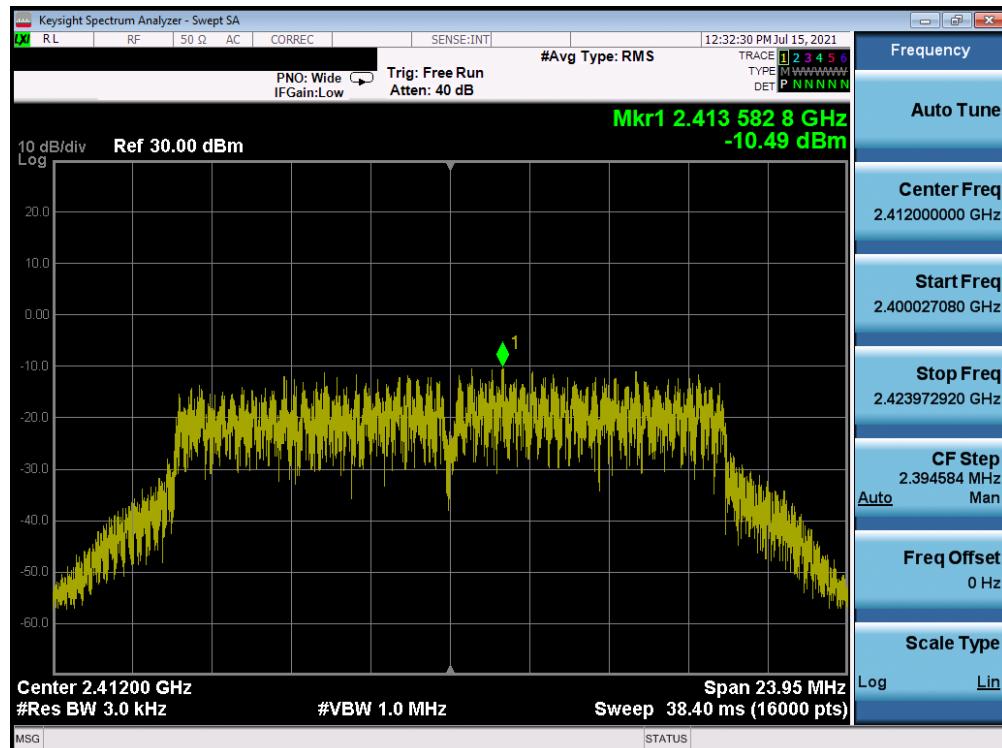


Plot 7-31. Power Spectral Density Plot Antenna B (802.11g – Ch. 1) – 54Mbps

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 41 of 112

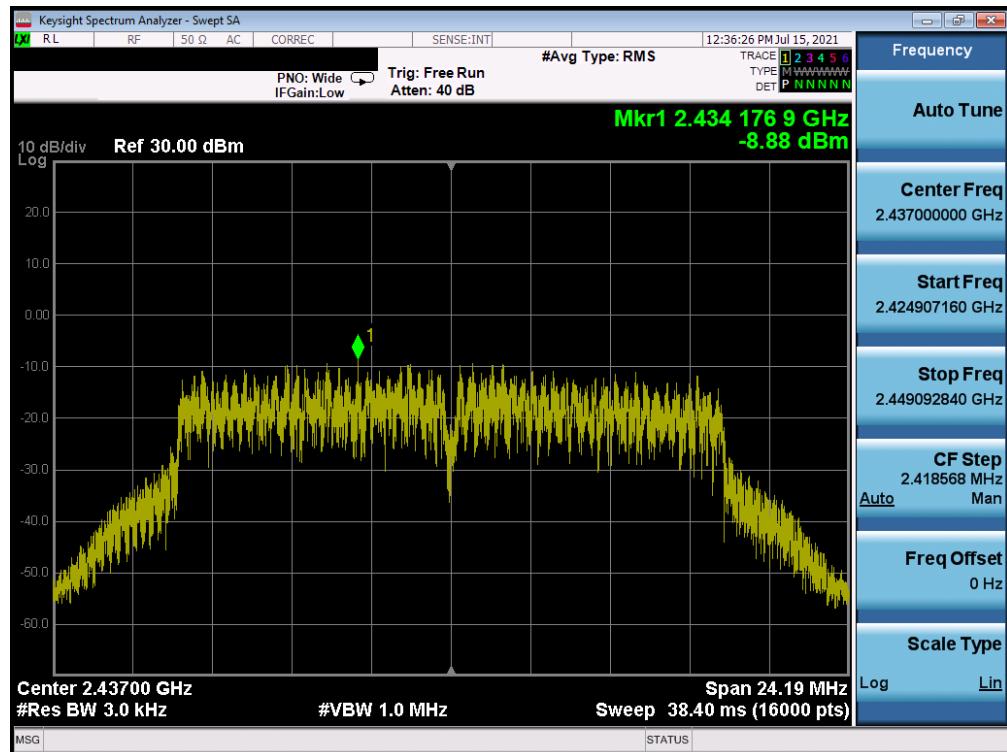


Plot 7-32. Power Spectral Density Plot Antenna B (802.11g – Ch. 6) – 54Mbps

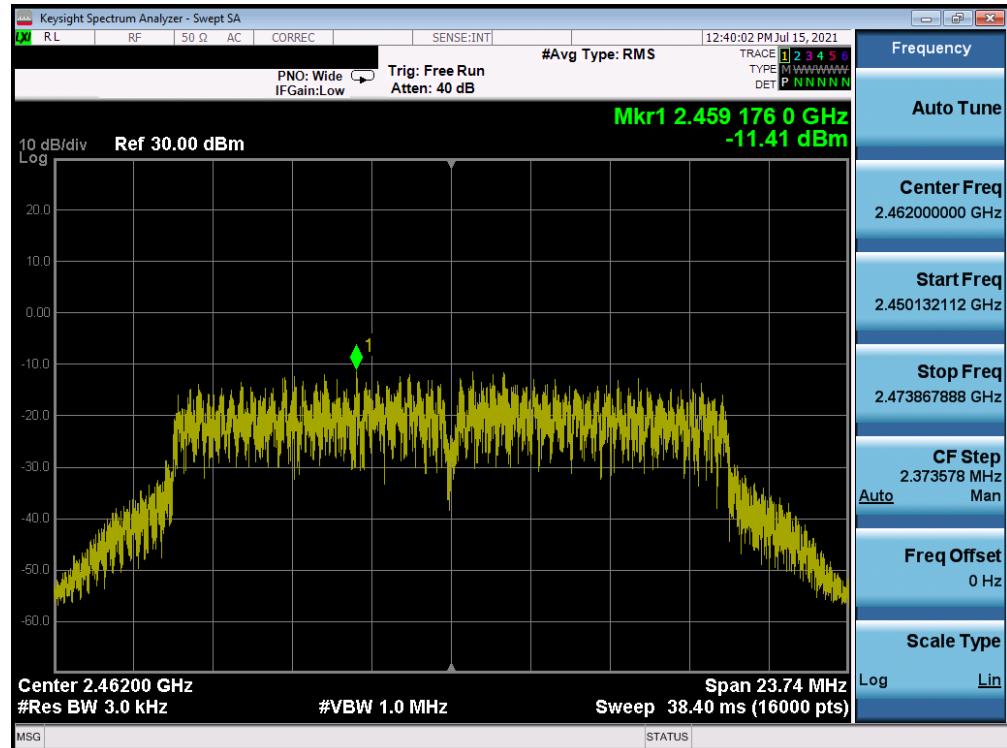


Plot 7-33. Power Spectral Density Plot Antenna B (802.11g – Ch. 11) – 54Mbps

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 42 of 112

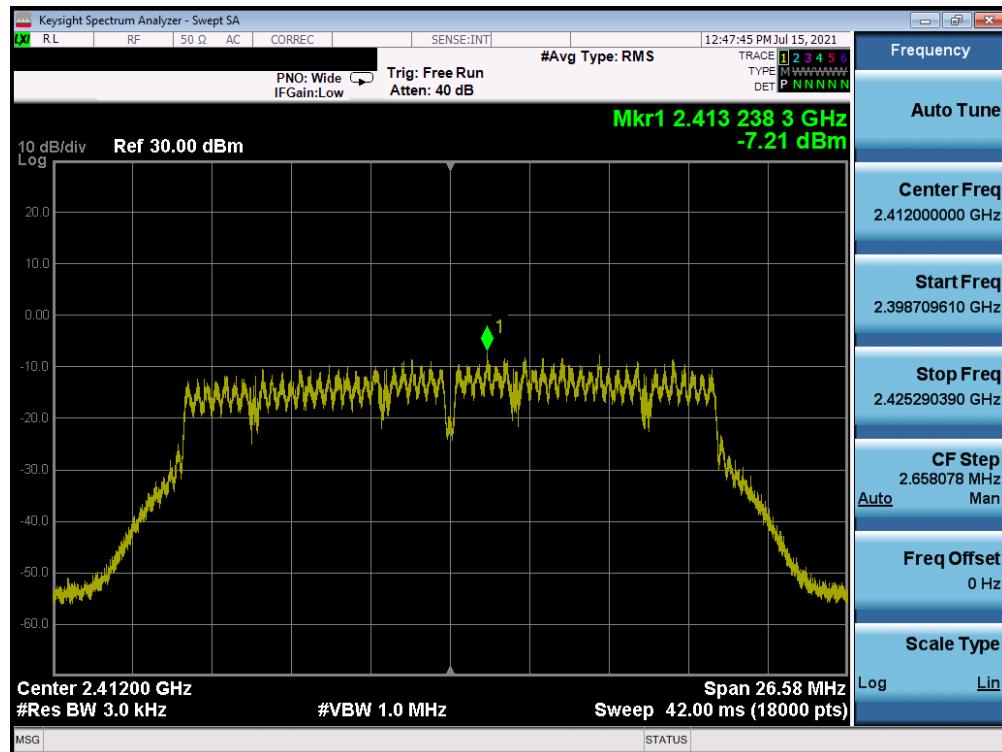


Plot 7-34. Power Spectral Density Plot Antenna B (802.11n (2.4GHz) – Ch. 1) – MCS7

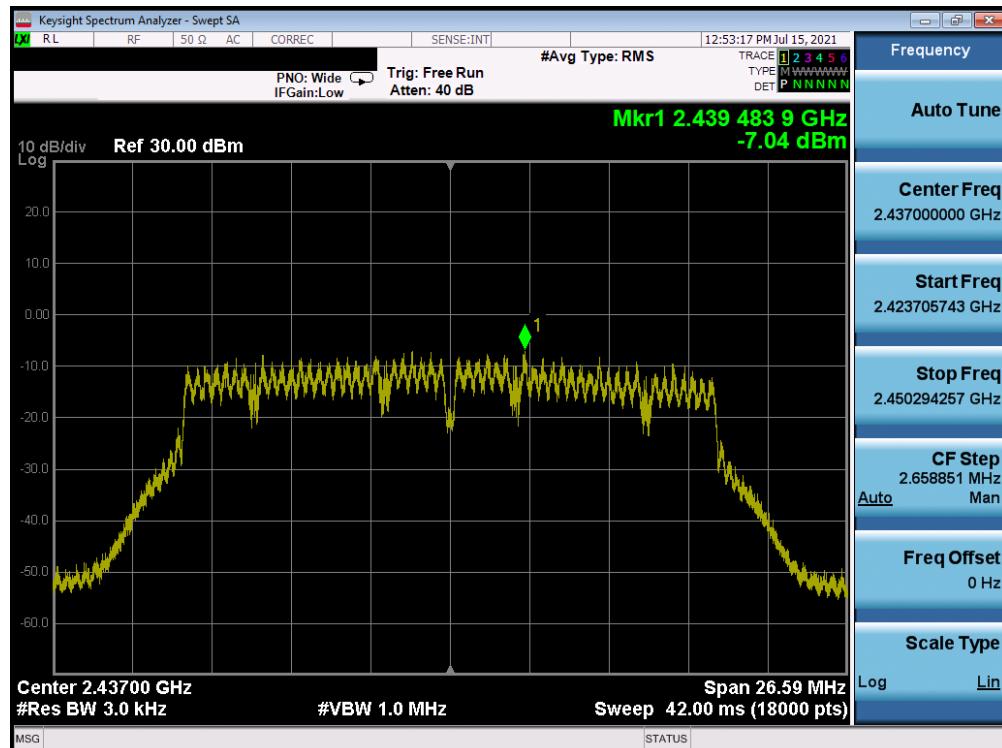

Plot 7-35. Power Spectral Density Plot Antenna B (802.11n (2.4GHz) – Ch. 6) – MCS7

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 43 of 112

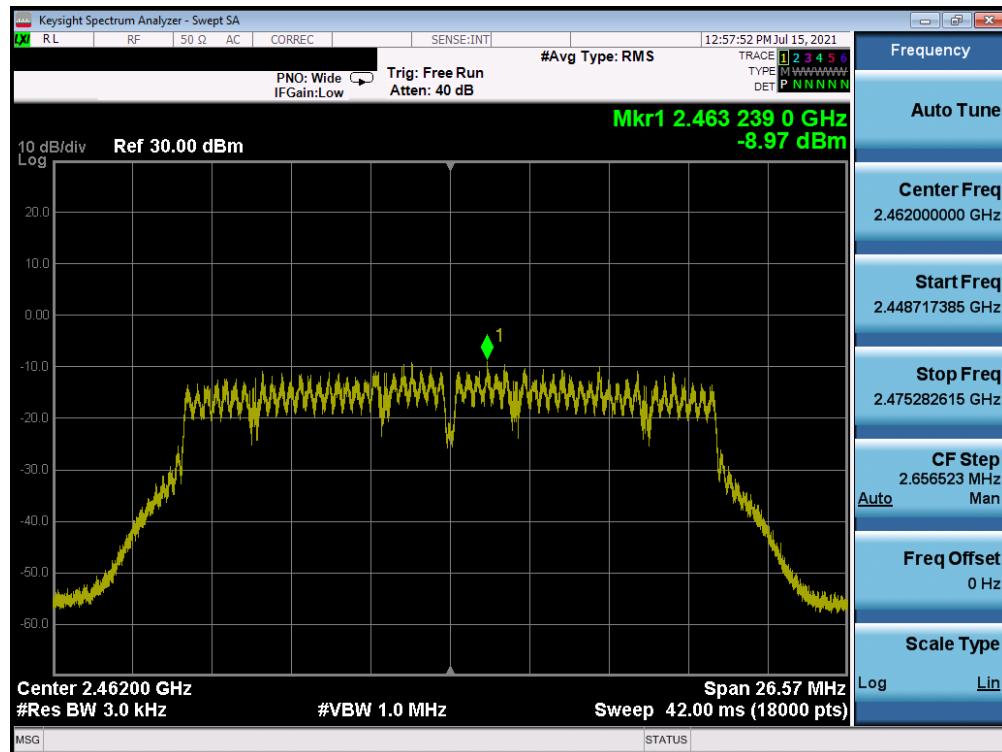

Plot 7-36. Power Spectral Density Plot Antenna B (802.11n (2.4GHz) – Ch. 11) – MCS7


FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 44 of 112

CDD Power Spectral Density Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Antenna A Power Spectral Density [dBm / 3kHz]	Antenna B Power Spectral Density [dBm / 3kHz]	Summed CDD Power Spectral Density [dBm / 3kHz]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	g	54	-11.97	-11.33	-8.62	8.00	-16.62	Pass
2437	6	g	54	-9.60	-9.34	-6.46	8.00	-14.46	Pass
2462	11	g	54	-13.11	-12.02	-9.52	8.00	-17.52	Pass
2412	1	n	130/144.4 (MCS15)	-9.18	-8.25	-5.68	8.00	-13.68	Pass
2437	6	n	130/144.4 (MCS15)	-6.60	-5.51	-3.01	8.00	-11.01	Pass
2462	11	n	130/144.4 (MCS15)	-9.82	-8.91	-6.33	8.00	-14.33	Pass

Table 7-14.CDD Conducted Power Density Measurements

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 45 of 112

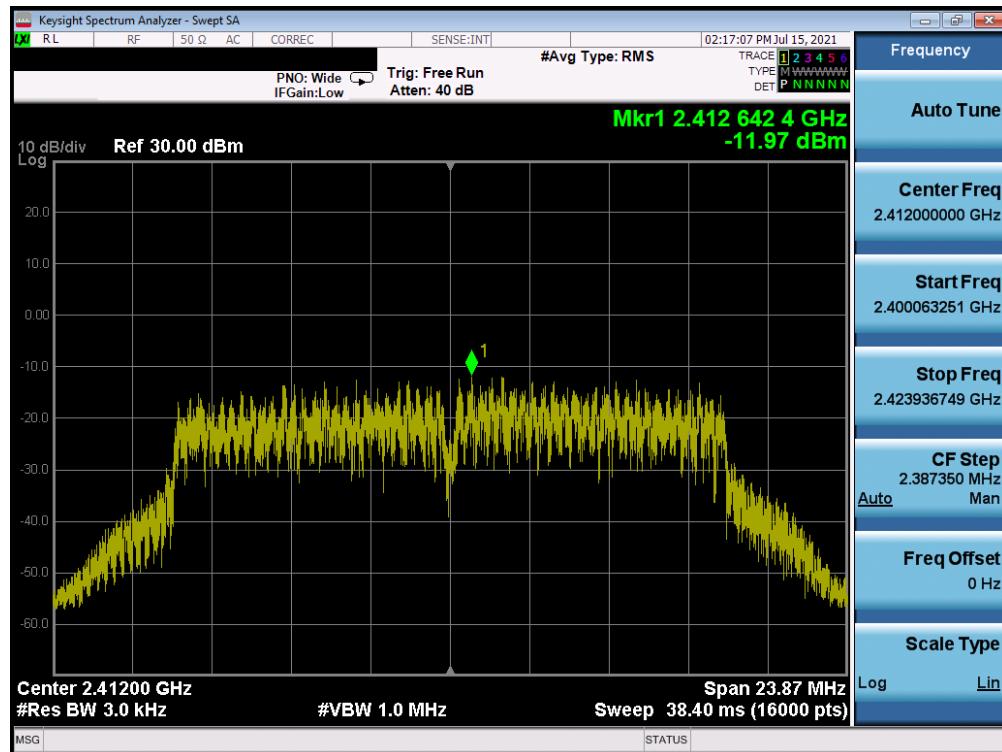


Plot 7-37. Power Spectral Density Plot CDD Antenna A (802.11g – Ch. 1) – 54Mbps

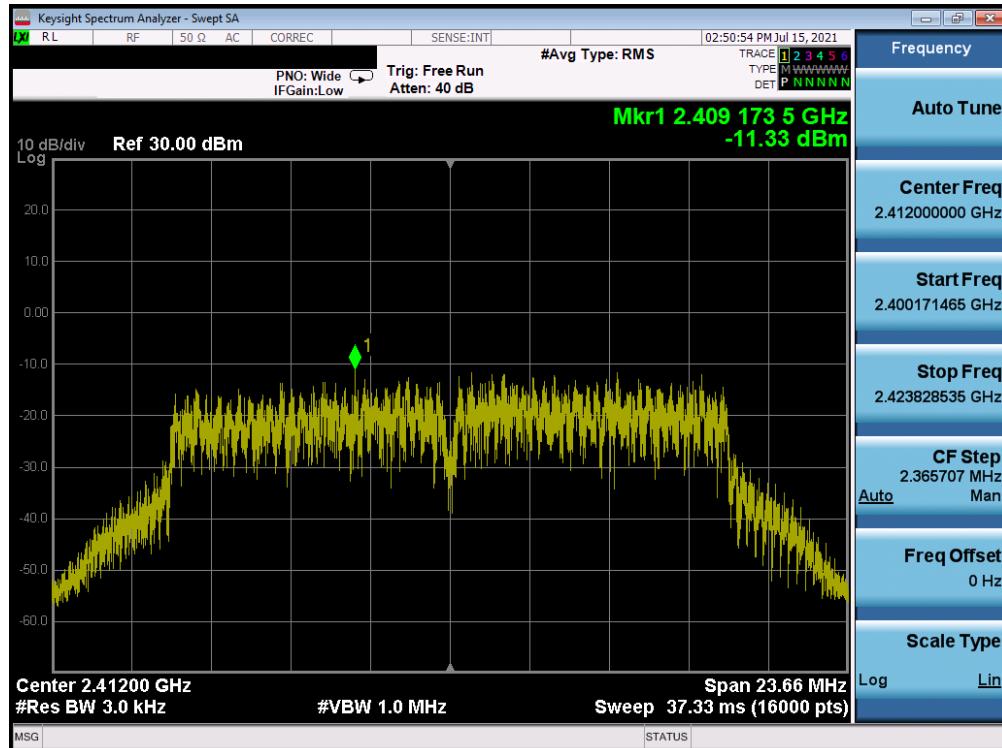


Plot 7-38. Power Spectral Density Plot CDD Antenna B (802.11g – Ch. 1) – 54Mbps

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 46 of 112

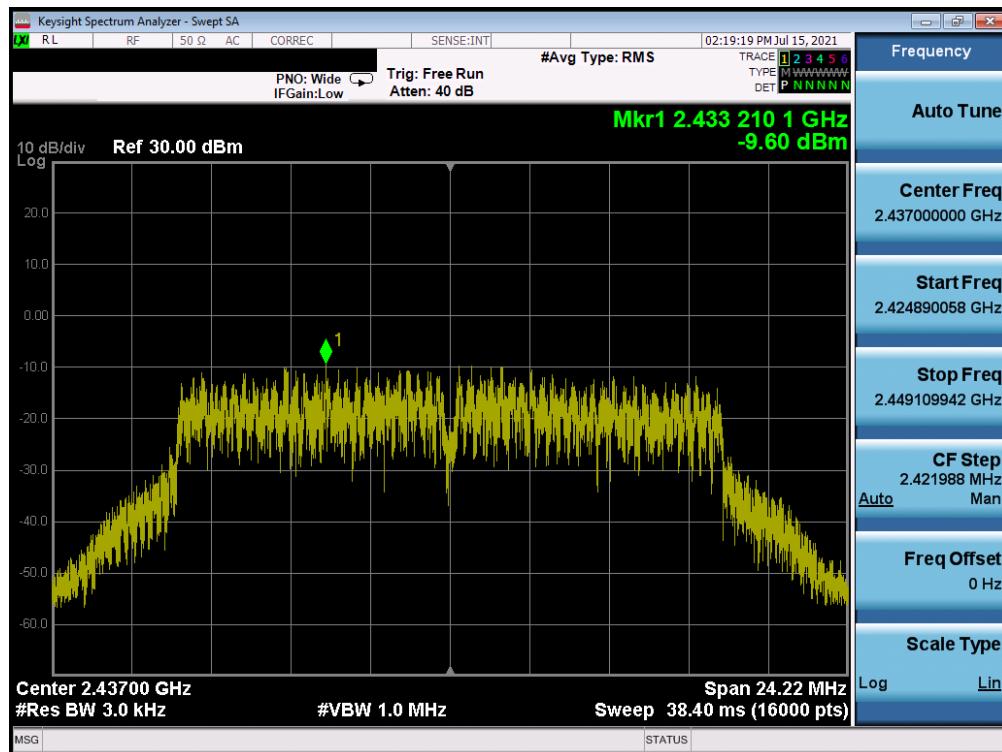


Plot 7-39. Power Spectral Density Plot CDD Antenna A (802.11g – Ch. 6) – 54Mbps

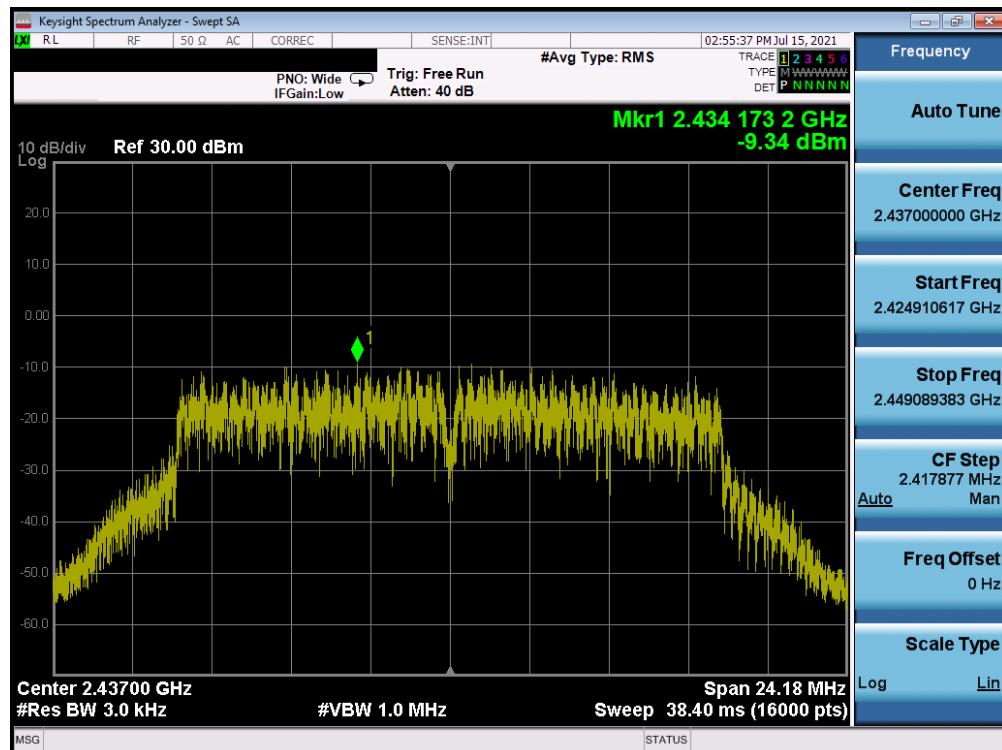


Plot 7-40. Power Spectral Density Plot CDD Antenna B (802.11g – Ch. 6) – 54Mbps

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 47 of 112

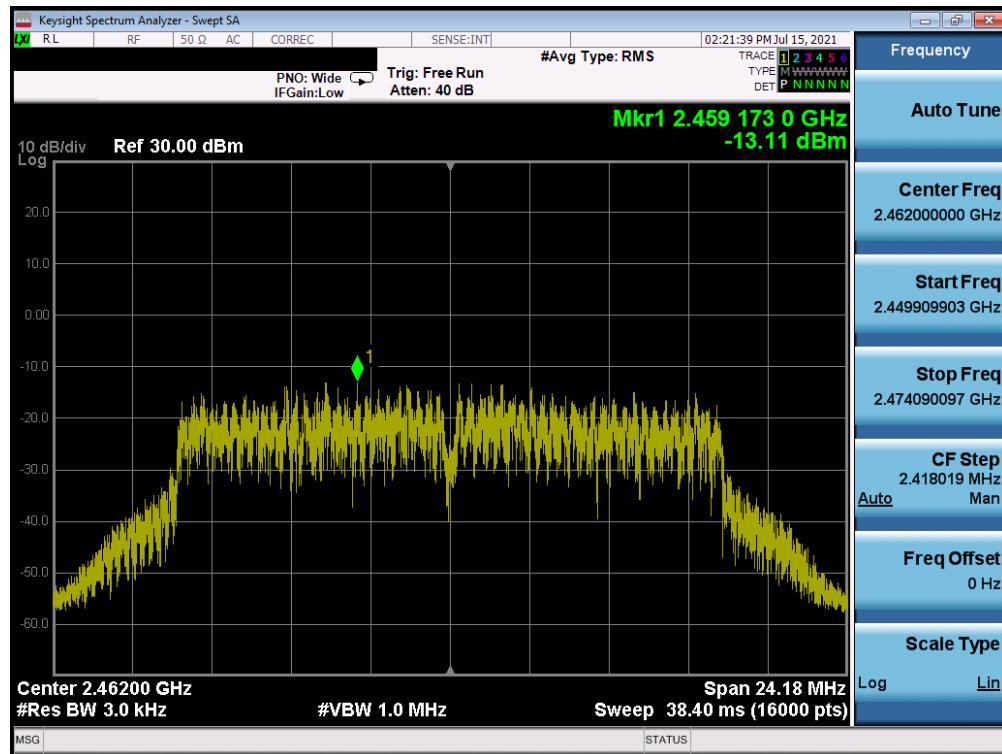


Plot 7-41. Power Spectral Density Plot CDD Antenna A (802.11g – Ch. 11) – 54Mbps

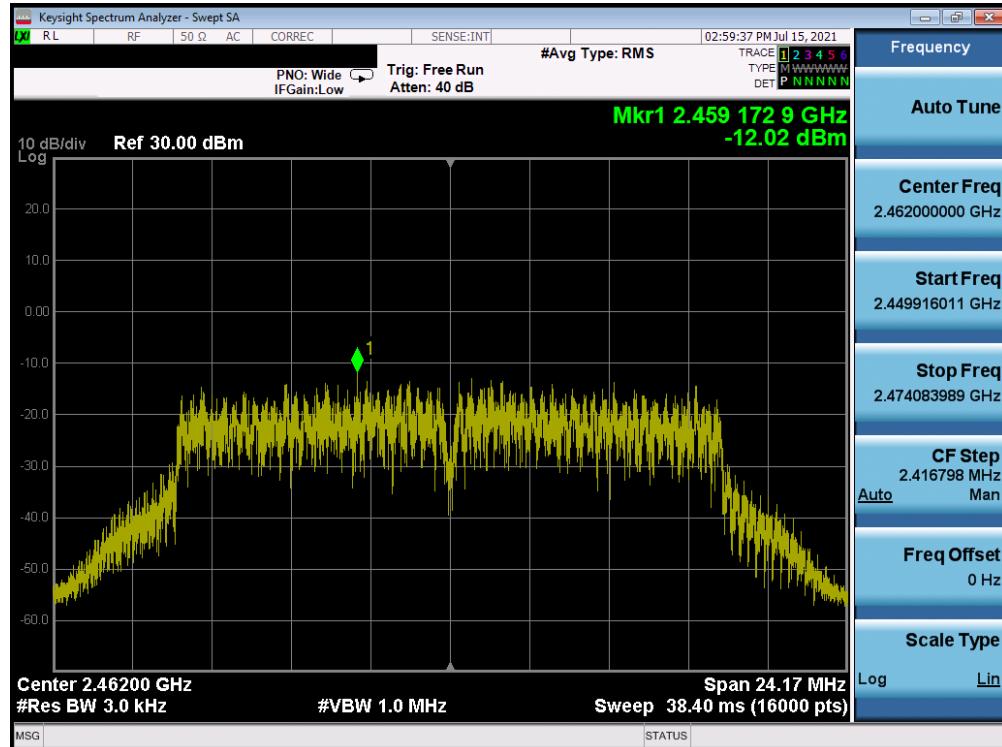


Plot 7-42. Power Spectral Density Plot CDD Antenna B (802.11g – Ch. 11) – 54Mbps

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 48 of 112

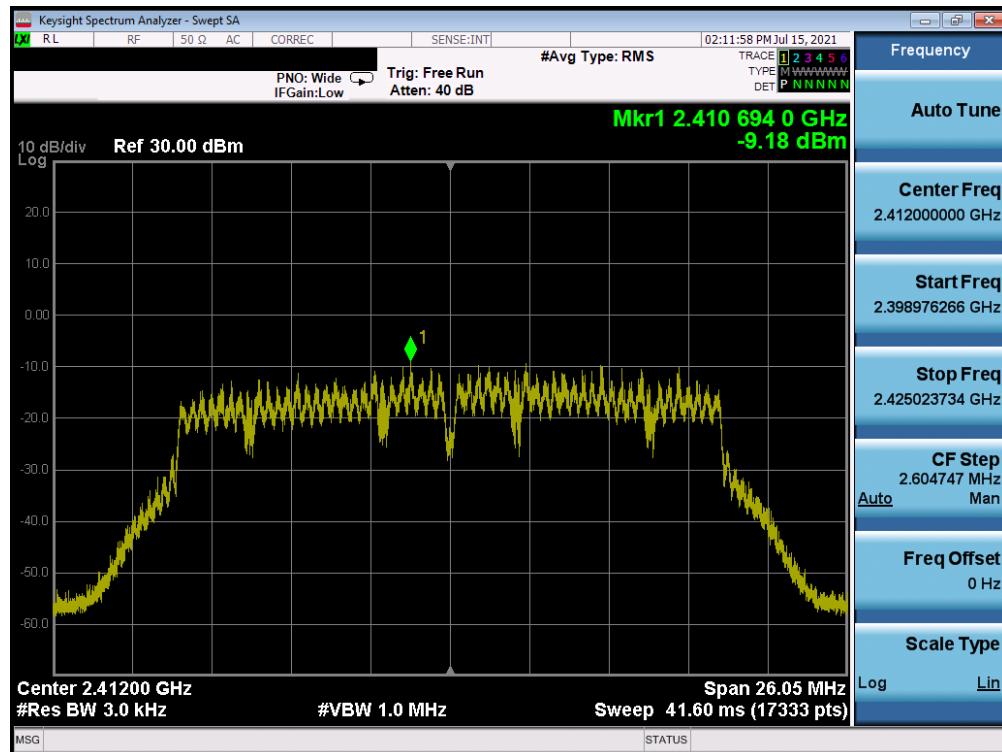


Plot 7-43. Power Spectral Density Plot CDD Antenna A (802.11n (2.4GHz) – Ch. 1) – MCS15

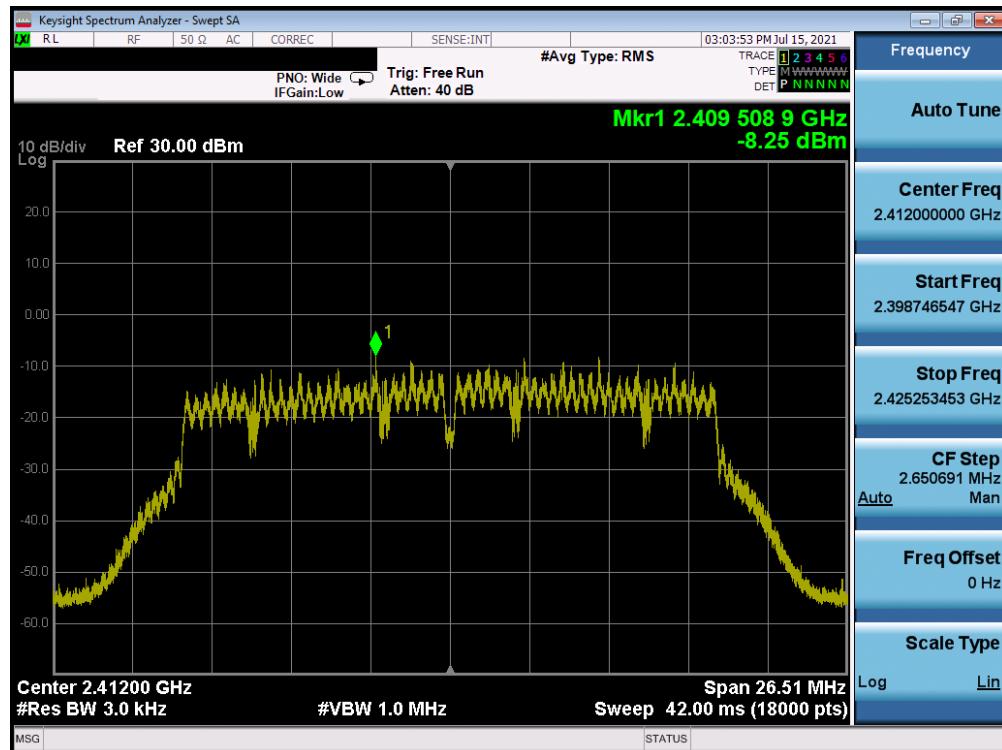


Plot 7-44. Power Spectral Density Plot CDD Antenna B (802.11n (2.4GHz) – Ch. 1) – MCS15

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 49 of 112

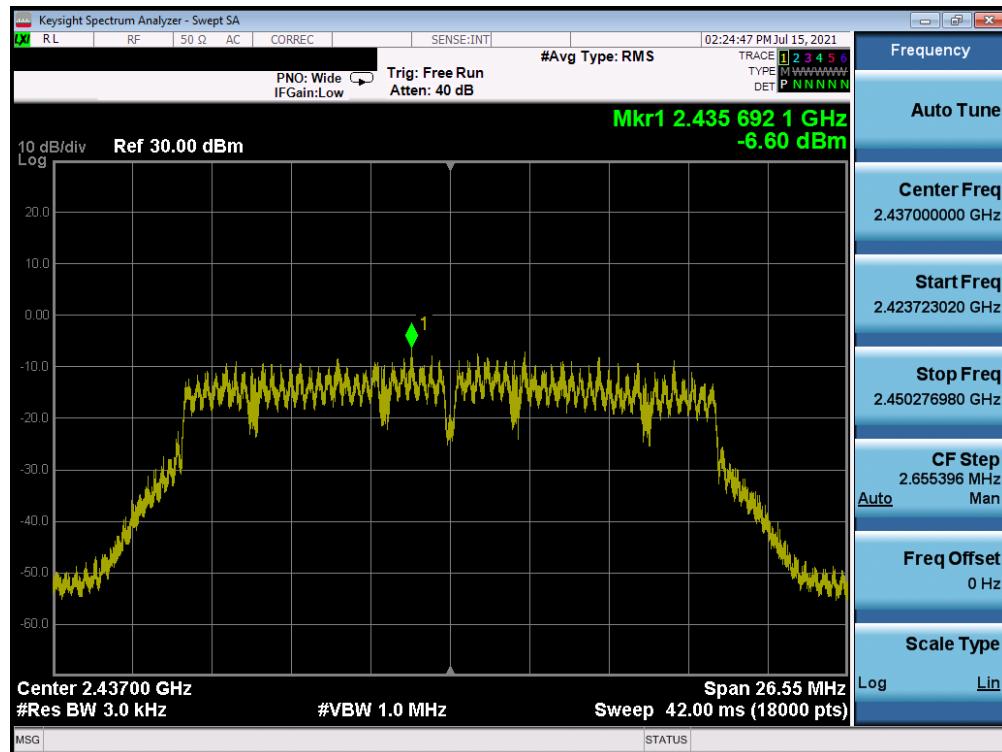


Plot 7-45. Power Spectral Density Plot CDD Antenna A (802.11n (2.4GHz) – Ch. 6) – MCS15

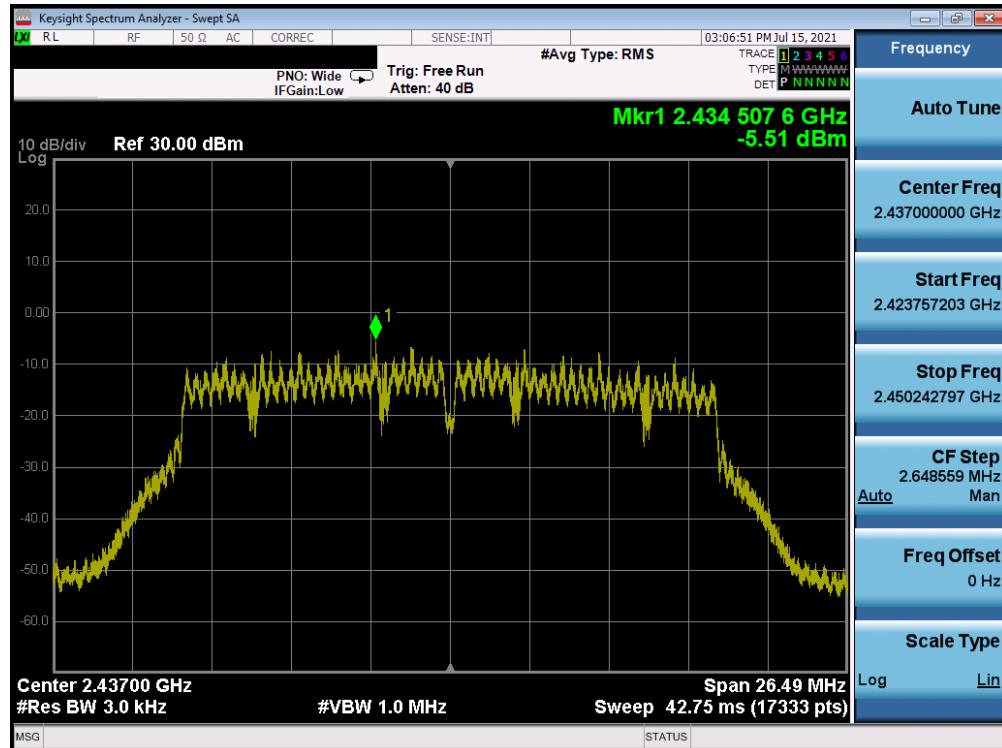


Plot 7-46. Power Spectral Density Plot CDD Antenna B (802.11n (2.4GHz) – Ch. 6) – MCS15

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 50 of 112

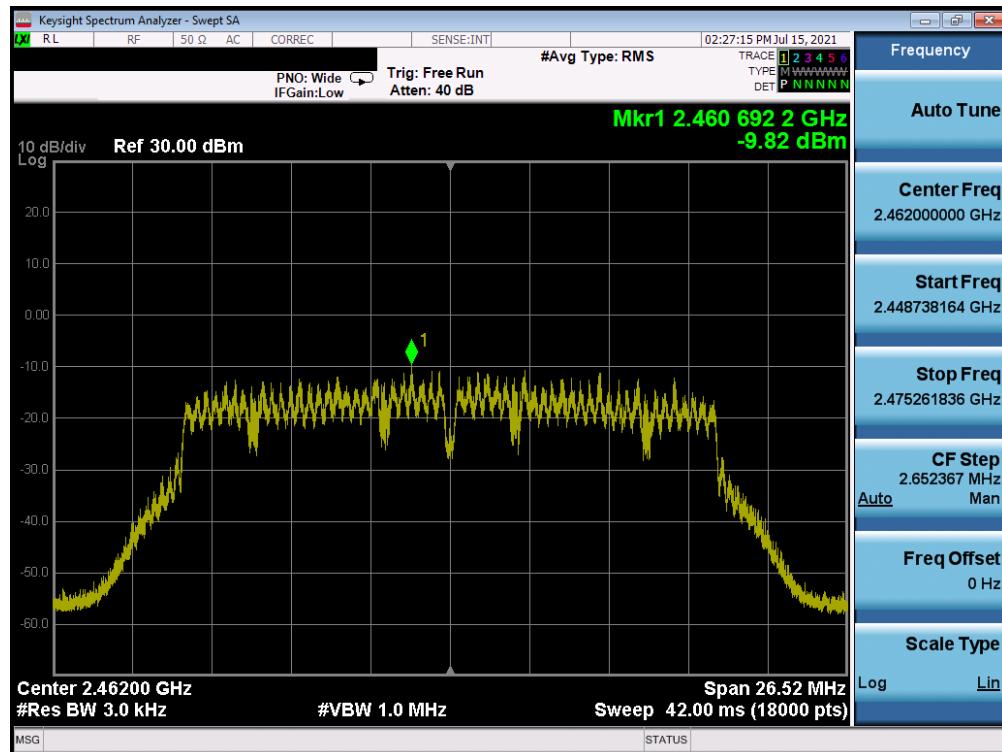

Plot 7-47. Power Spectral Density Plot CDD Antenna A (802.11n (2.4GHz) – Ch. 11) – MCS15

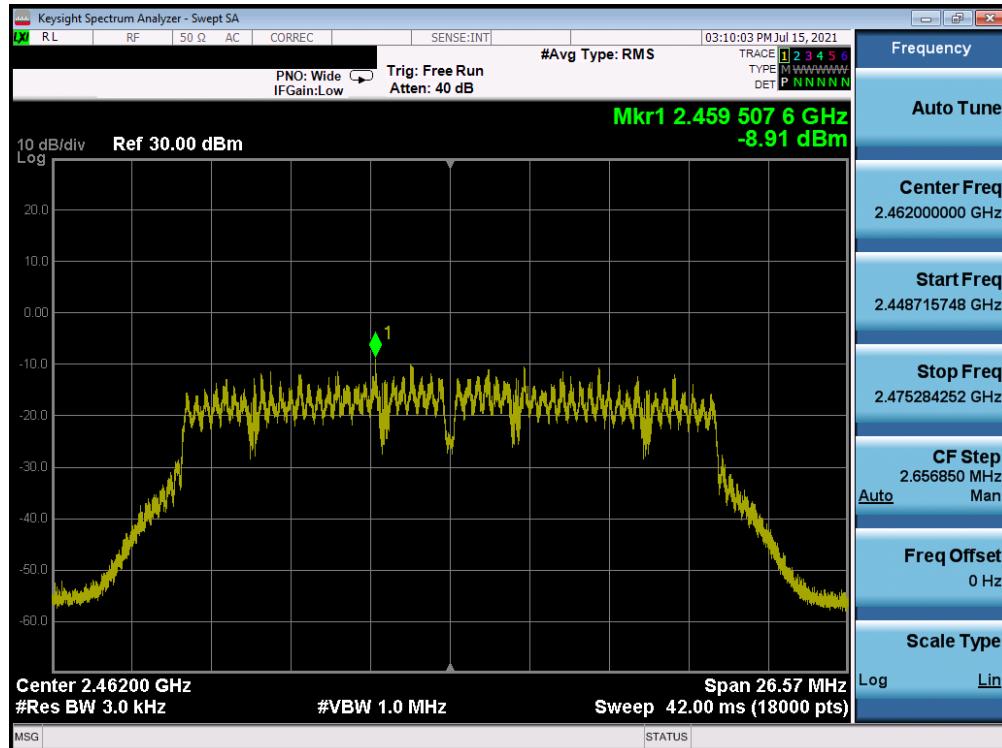

Plot 7-48. Power Spectral Density Plot CDD Antenna B (802.11n (2.4GHz) – Ch. 11) – MCS15

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 51 of 112

Note:

Per ANSI C63.10-2013 Section 14.3.2.2 and KDB 662911 D01 v02r01 Section E)2), the power spectral density at Antenna A and Antenna B were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample CDD Calculation:

At 2412MHz the average conducted power spectral density was measured to be -11.97 dBm for Antenna A and -11.33 dBm for Antenna B.

$$\text{Antenna A} + \text{Antenna B} = \text{CDD}$$

$$((-11.97 \text{ dBm}) + (-11.33 \text{ dBm})) = (0.064 \text{ mW} + 0.074 \text{ mW}) = 0.138 \text{ mW} = -8.6 \text{ dBm}$$

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 52 of 112

7.5 Conducted Authorized Band Edge

§15.247(d); RSS-247 [5.5]

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. For the following out of band conducted spurious emissions plots at the band edge, the EUT was set at a data rate of 11Mbps for "b" mode, 6, 18, 54 Mbps for "g" mode, 6.5/7.2, 26/28.9, 65/72.2Mbps for "n" mode as these settings produced the worst-case emissions.

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 7.4).

Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3
KDB 558074 D01 v05r02 – Section 8.7.2

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 1MHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times$ Span/RBW
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-4. Test Instrument & Measurement Setup

Test Notes


All data rates and antenna configurations were investigated and only the worst case is reported.

Antenna A Conducted Emissions at the Band Edge

FCC ID: BCGA2603 IC: 579C-A2603	 PCTEST[®] Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device		Page 53 of 112

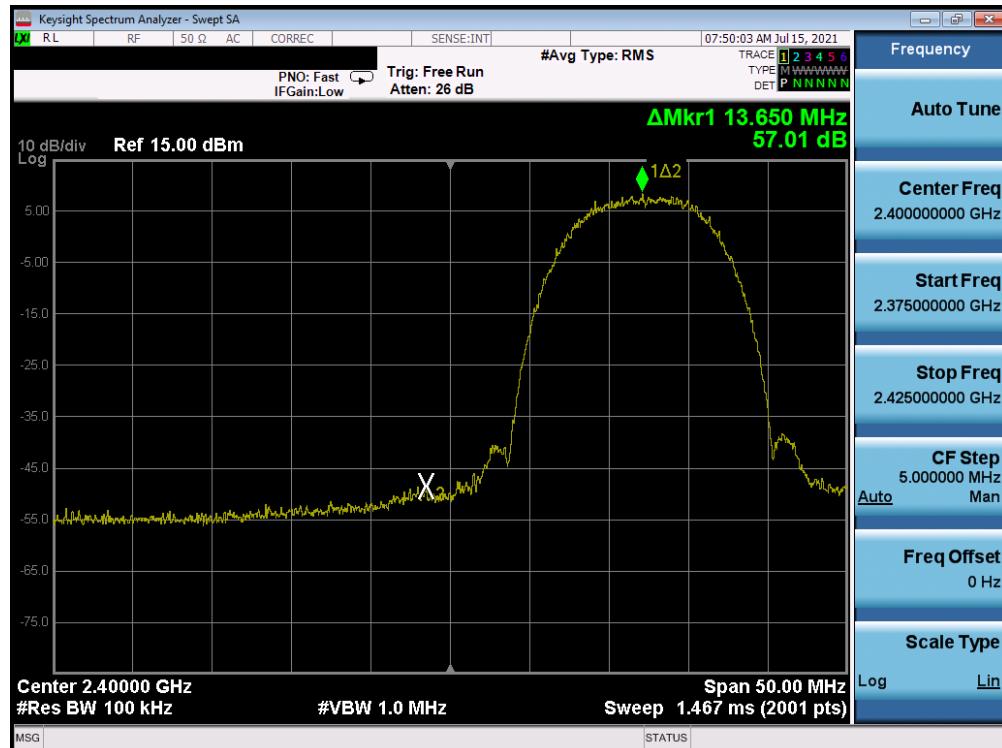


Plot 7-49. Band Edge Plot Antenna A (802.11b – Ch. 1) – 11Mbps

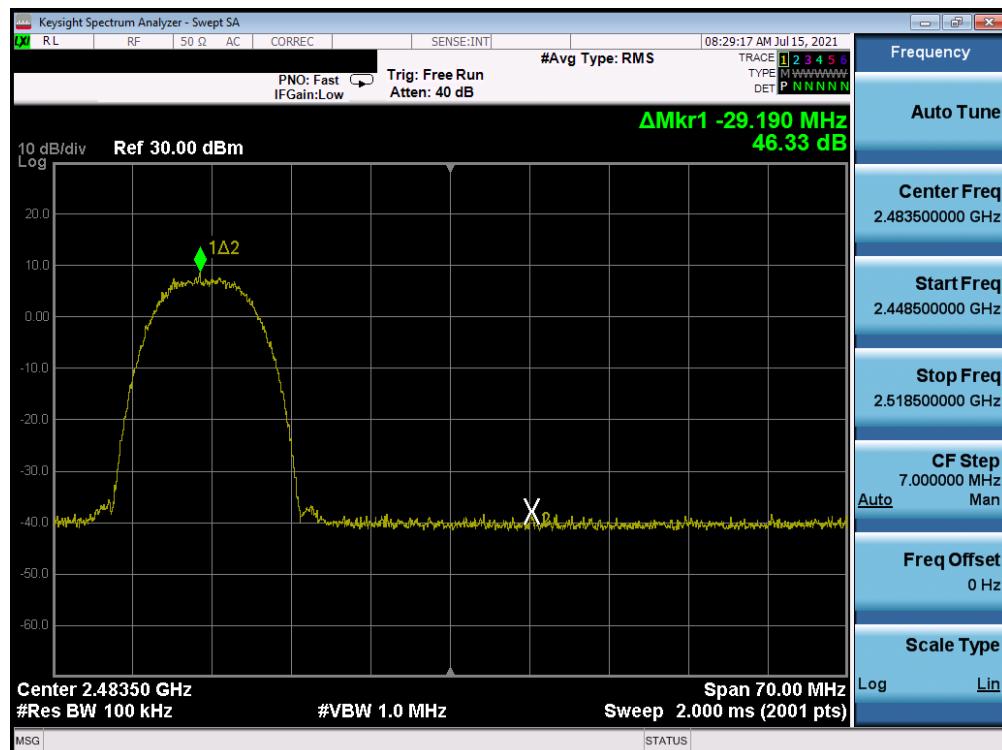


Plot 7-50. Band Edge Plot Antenna A (802.11b – Ch. 11) – 11Mbps

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 54 of 112

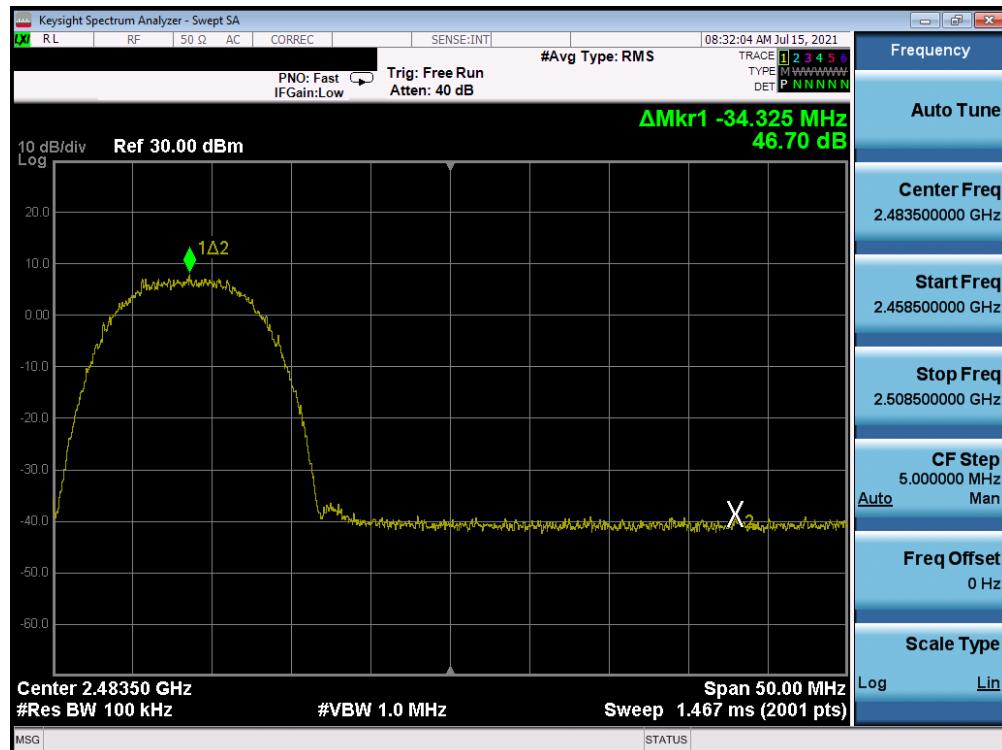


Plot 7-51. Band Edge Plot Antenna A (802.11b – Ch. 12) – 11Mbps

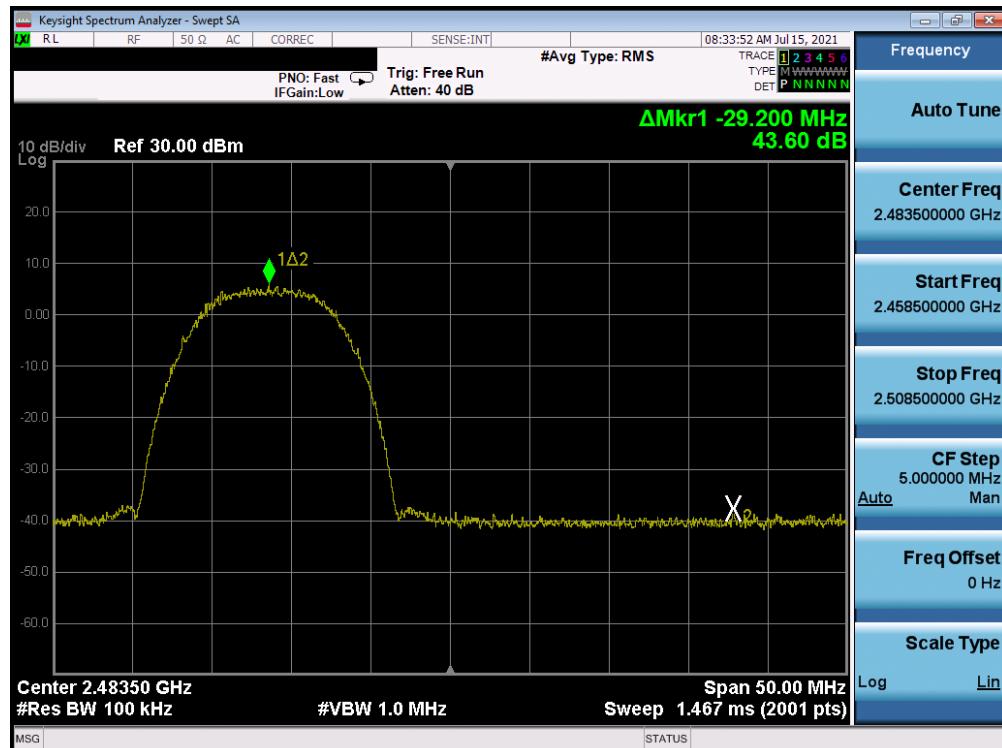


Plot 7-52. Band Edge Plot Antenna A (802.11b – Ch. 13) – 11Mbps

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 55 of 112

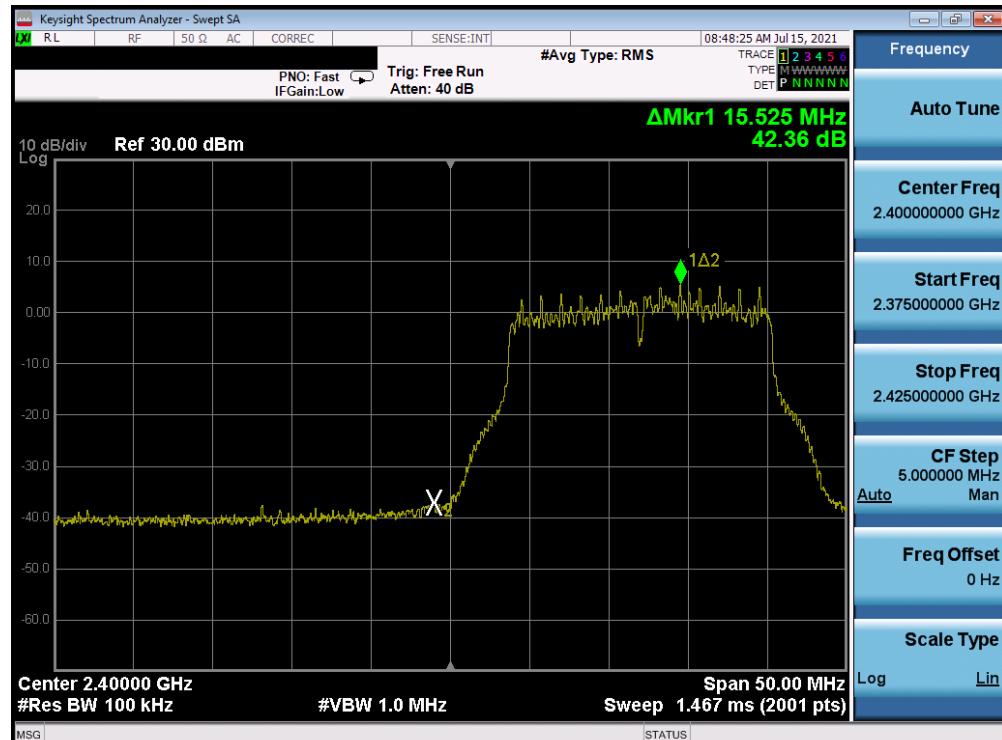

Plot 7-53. Band Edge Plot Antenna A (802.11g- Ch. 1) – 54Mbps

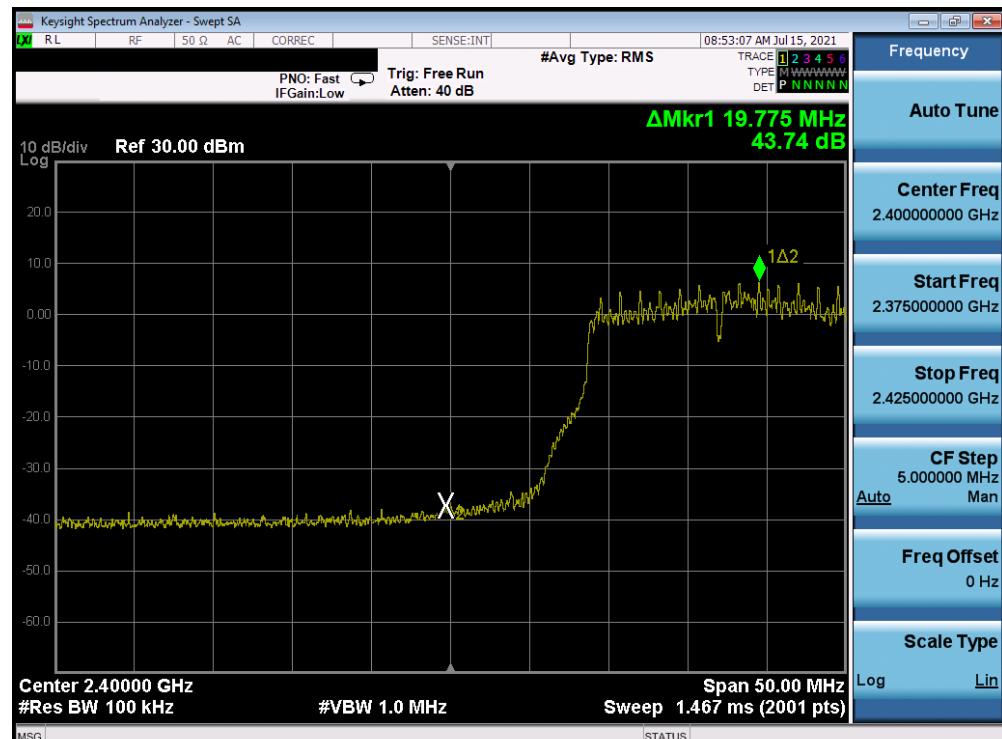

Plot 7-54. Band Edge Plot Antenna A (802.11g- Ch. 2) – 54Mbps

FCC ID: BCGA2603 IC: 579C-A2603	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106080051-06.BCG	Test Dates: 05/28/2021 – 07/23/2021	EUT Type: Tablet Device	Page 56 of 112