

FCC and ISED Test Report

Apple Inc
Model: A2737

In accordance with FCC 47 CFR Part 15C, ISED
RSS-247 and ISED RSS-GEN
(2.4 GHz Bluetooth)

Prepared for: Apple Inc
One Apple Park Way, Cupertino
California, 95014, USA

FCC ID: BCGA2737

IC: 579C-A2737



Add value.
Inspire trust.

COMMERCIAL-IN-CONFIDENCE

Document 75954422-09 Issue 01

SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Steve White	Key Account Manager	Authorised Signatory	30 September 2022

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD document control rules.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15C, ISED RSS-247 and ISED RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Report Generation	Hollie Marshall	30 September 2022	

FCC Accreditation

90987 Octagon House, Fareham Test Laboratory

ISED Accreditation

12669A Octagon House, Fareham Test Laboratory

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15C: 2020, ISED RSS-247: Issue 2 (02-2017) and ISED RSS-GEN: Issue 5 (04-2018) + A2 (02-2021) for the tests detailed in section 1.3.



DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD. No part of this document may be reproduced without the prior written approval of TÜV SÜD. © 2022 TÜV SÜD. This report relates only to the actual item/items tested.

ACCREDITATION

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation. Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

TÜV SÜD
is a trading name of TÜV SÜD Ltd
Registered in Scotland at East Kilbride,
Glasgow G75 0QF, United Kingdom
Registered number: SC215164

TÜV SÜD Ltd is a
TÜV SÜD Group Company

Phone: +44 (0) 1489 558100
Fax: +44 (0) 1489 558101
www.tuvsud.com/en

TÜV SÜD
Octagon House
Concorde Way
Fareham
Hampshire PO15 5RL
United Kingdom

TÜV SÜD

TÜV®



Contents

1	Report Summary	2
1.1	Report Modification Record.....	2
1.2	Introduction.....	2
1.3	Brief Summary of Results	3
1.4	Product Information	4
1.5	Deviations from the Standard.....	4
1.6	EUT Modification Record	5
1.7	Test Location	6
2	Test Details	7
2.1	Restricted Band Edges.....	7
2.2	Frequency Hopping Systems - Average Time of Occupancy	29
2.3	Frequency Hopping Systems - Channel Separation.....	46
2.4	Frequency Hopping Systems - Number of Hopping Channels	63
2.5	Frequency Hopping Systems - 20 dB Bandwidth	80
2.6	Maximum Conducted Output Power	133
2.7	Spurious Radiated Emissions	150
2.8	Authorised Band Edges	167
3	Measurement Uncertainty	189



1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	30 September 2022

Table 1

1.2 Introduction

Applicant	Apple Inc
Manufacturer	Apple Inc
Model Number(s)	A2737
Serial Number(s)	MW5QG9Q771 and QQRXMCWXL5
Hardware Version(s)	REV 1.0
Software Version(s)	20J42560n
Number of Samples Tested	2
Test Specification/Issue/Date	FCC 47 CFR Part 15C: 2020 ISED RSS-247: Issue 2 (02-2017) ISED RSS-GEN: Issue 5 (04-2018) + A2 (02-2021)
Order Number	540246998
Date of Receipt of EUT	06-May-2022
Start of Test	26-May-2022
Finish of Test	07-September-2022
Name of Engineer(s)	Thomas Randall, Mohammad Malik, Mohamud Mohamud Daniel Cameron, Colin Brain, Ian Hart, Faisal Malyar, Danial Shafique, Taha Shafique and Elliot Callender
Related Document(s)	ANSI C63.10 (2013) ANSI C63.10 (2020) KDB 662911 D01 v02r01



1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15C, ISSED RSS-247 and ISSED RSS-GEN is shown below.

Section	Specification Clause			Test Description	Result	Comments/Base Standard
	FCC Part 15C	RSS-247	RSS-GEN			
Configuration and Mode: 2.4 GHz Bluetooth - FHSS						
-	15.203	-	-	Antenna Requirement	N/T	The device complies with the provisions of this section, as it uses permanently attached integral antennas.
2.1	15.205	3.1	8.10	Restricted Band Edges	Pass	
2.2	15.247 (a)(1)	5.1	-	Frequency Hopping Systems - Average Time of Occupancy	Pass	
2.3	15.247 (a)(1)	5.1	-	Frequency Hopping Systems - Channel Separation	Pass	
2.4	15.247 (a)(1)	5.1	-	Frequency Hopping Systems - Number of Hopping Channels	Pass	
2.5	15.247 (a)(1)	5.1	6.7	Frequency Hopping Systems - 20 dB Bandwidth	Pass	
2.6	15.247 (b)	5.4	6.12	Maximum Conducted Output Power	Pass	
2.7	15.247 (d) and 15.209	3.3 and 5.5	6.13 and 8.9	Spurious Radiated Emissions	Pass	
2.8	15.247 (d)	5.5	-	Authorised Band Edges	Pass	

Table 2



1.4 Product Information

1.4.1 Technical Description

The equipment under test was an Apple TV Set Top Box with Bluetooth® and IEEE 802.11 a/b/g/n/ac/ax Wi-Fi capabilities in the 2.4GHz and 5GHz bands.

1.4.2 Test Setup

For conducted tests, a conducted test point was provided by the manufacturer via a UFL connector and cable. The loss of these test cables were known and compensated for in any conducted measurements.

For tests in SISO operation, conducted tests and Band Edge were performed on the BT Dedicated Core (BT Core 2) as well as the Core from the main radio with the highest antenna gain as Core 0 and Core 1 are identical but with unequal antenna gains. The EUT supports TxBF on Core 0 + Core 1 for BDR/EDR/HDR modes of operation.

Bluetooth BDR/EDR was assessed as a FHSS system. The EUT supports Bluetooth on the following mode of operations across its antenna ports:

BT Core 0 – SISO (iPA and ePA), TxBF (iPA and ePA)
BT Core 1 – SISO (iPA and ePA), TxBF (iPA and ePA)
BT Core 2 – SISO (iPA)

For all tests, the EUT was put into a continuous transmit test mode with the manufacturer's test commands via a script running in the EUTs terminal application. The EUT then transmitted the required type of modulation/packet type on either a static channel selected within the test script or frequency hopping over the maximum number of supported channels.

All testing was performed with the EUT powered via a 120 V AC, 60 Hz source.

1.4.3 Antenna Gain Table

Antenna Port	Frequency Range (MHz)	Peak Gain (dBi)	Conducted Cable Loss (dB)
BT Core 0	2400 to 2480	-1.02	0.7
BT Core 1	2400 to 2480	-0.21	0.7
BT Core 2	2400 to 2480	2.15	0.7

Table 3

1.5 Deviations from the Standard

No deviations from the applicable test standard were made during testing.



1.6 EUT Modification Record

The table below details modifications made to the EUT during the test programme.

The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
Model: A2737, Serial Number: MW5QG9Q771			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A2737, Serial Number: QQRXMCWXL5			
0	As supplied by the customer	Not Applicable	Not Applicable

Table 4



1.7 Test Location

TÜV SÜD conducted the following tests at our Fareham Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: 2.4 GHz Bluetooth - FHSS		
Restricted Band Edges	Thomas Randall, Mohammad Malik and Mohamud Mohamud	UKAS
Frequency Hopping Systems - Average Time of Occupancy	Daniel Cameron	UKAS
Frequency Hopping Systems - Channel Separation	Daniel Cameron	UKAS
Frequency Hopping Systems - Number of Hopping Channels	Daniel Cameron	UKAS
Frequency Hopping Systems - 20 dB Bandwidth	Daniel Cameron	UKAS
Maximum Conducted Output Power	Daniel Cameron	UKAS
Authorised Band Edges	Thomas Randall, Mohammad Malik and Mohamud Mohamud	UKAS
Spurious Radiated Emissions	Elliot Callender, Taha Malyar and Faisal Malyar	UKAS

Table 5

Office Address:

TÜV SÜD
Octagon House
Concorde Way
Fareham
Hampshire
PO15 5RL
United Kingdom

TÜV SÜD conducted the following tests at our Concorde Park Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: 2.4 GHz Bluetooth - FHSS		
Spurious Radiated Emissions	Ian Hart, Thomas Randall, Danial Shafique and Colin Brain	UKAS

Table 6

Office Address:

TÜV SÜD
Concorde Park
Concorde Way
Fareham
Hampshire
PO15 5FG
United Kingdom



2 Test Details

2.1 Restricted Band Edges

2.1.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.205
ISED RSS-247, Clause 3.1
ISED RSS-GEN, Clause 8.10

2.1.2 Equipment Under Test and Modification State

A2737, S/N: QQRXMCWXL5 - Modification State 0

2.1.3 Date of Test

26-May-2022 to 27-May-2022

2.1.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 6.10.5.

Plots for average measurements were taken in accordance with ANSI C63.10, clause 4.1.4.2.5. These are shown for information purposes and were used to determine the worst-case measurement point. Final average measurements were then taken in accordance with ANSI C63.10, clause 4.1.4.2.2 to obtain the measurement result recorded in the test results tables.

The following conversion can be applied to convert from dB μ V/m to μ V/m:
 $10^{(\text{Field Strength in dB}\mu\text{V/m}/20)}$.

2.1.5 Environmental Conditions

Ambient Temperature	22.7 - 25.0 °C
Relative Humidity	39.5 - 43.8 %

2.1.6 Test Results

2.4 GHz Bluetooth (FHSS)

iPA

Mode	Modulation	Core	Packet Type	Tx Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
Static	GFSK	2	DH5	2402	2390.0	54.39	39.85
Static	$\pi/4$ DQPSK	2	2DH5	2402	2390.0	54.85	39.83
Static	8-DPSK	2	3DH5	2402	2390.0	54.61	39.83
Static	GFSK	2	DH5	2480	2483.5	54.03	40.53
Static	$\pi/4$ DQPSK	2	2DH5	2480	2483.5	53.67	41.01
Static	8-DPSK	2	3DH5	2480	2483.5	53.49	41.01

Table 7 - Restricted Band Edge Results

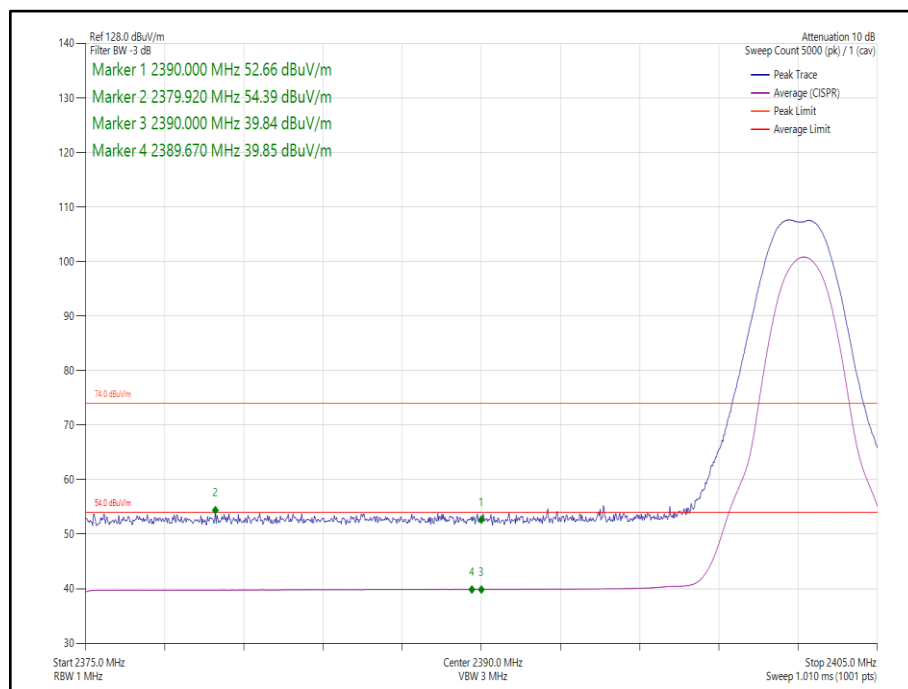


Figure 1 - Static - GFSK/DH5 - 2402 MHz - Band Edge Frequency 2390.0 MHz

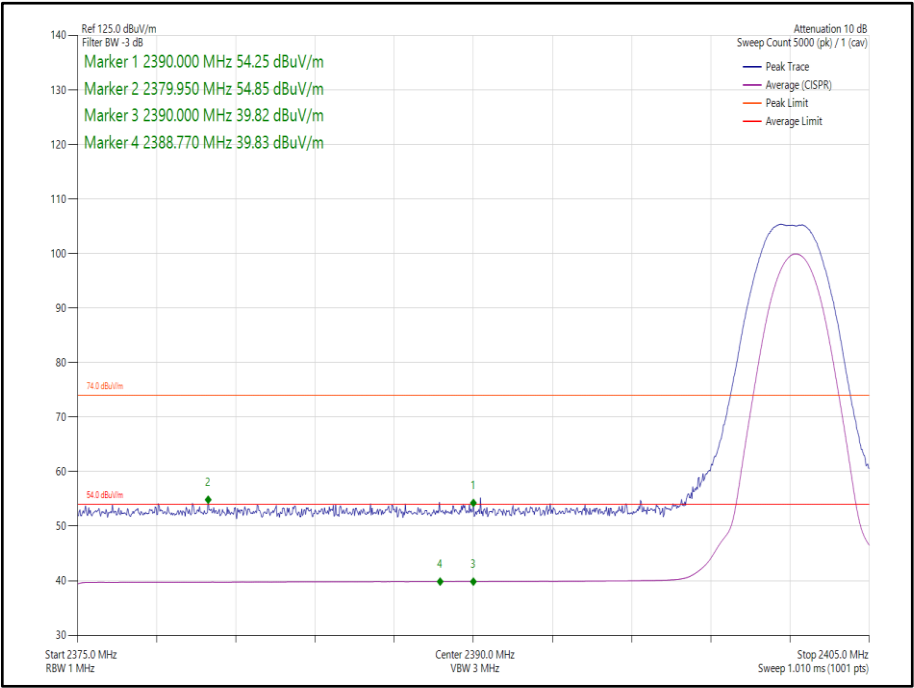


Figure 2 - Static - $\pi/4$ DQPSK/2DH5 - 2402 MHz - Band Edge Frequency 2390.0 MHz

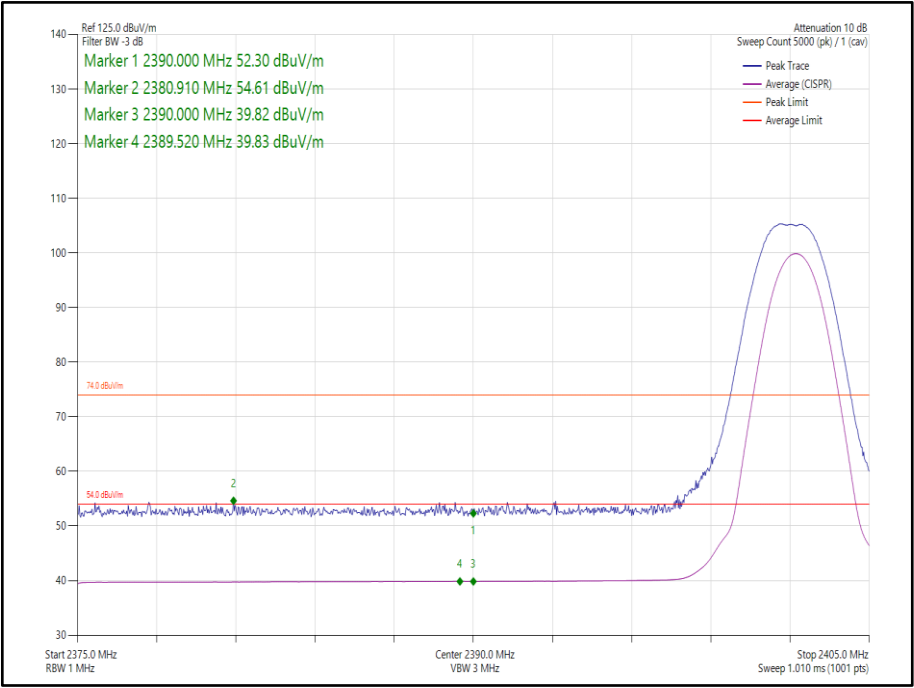


Figure 3 - Static - 8-DPSK/3DH5 - 2402 MHz Band Edge Frequency 2390.0 MHz

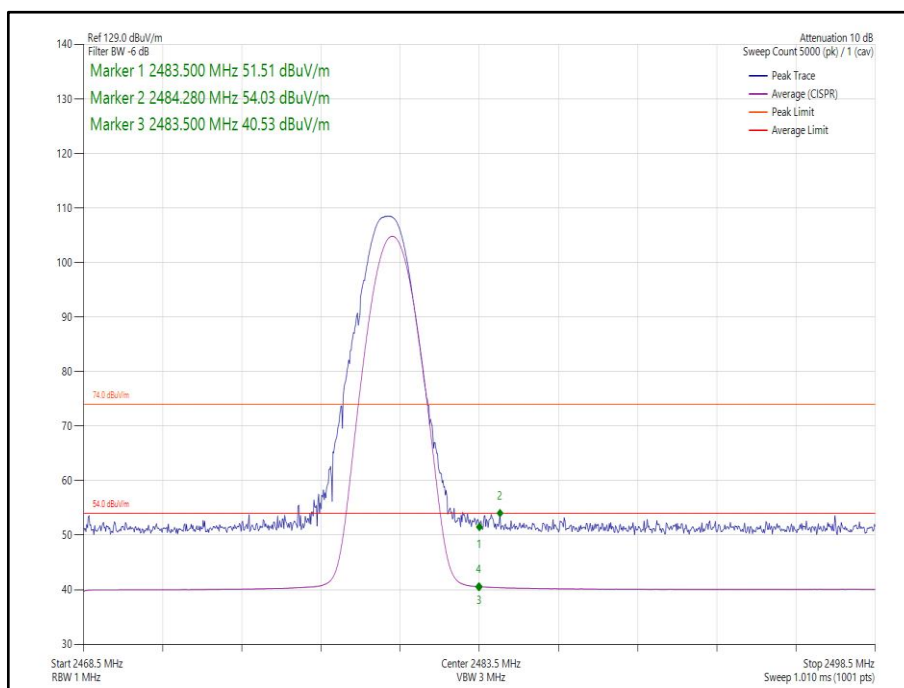


Figure 4 - Static - GFSK/DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

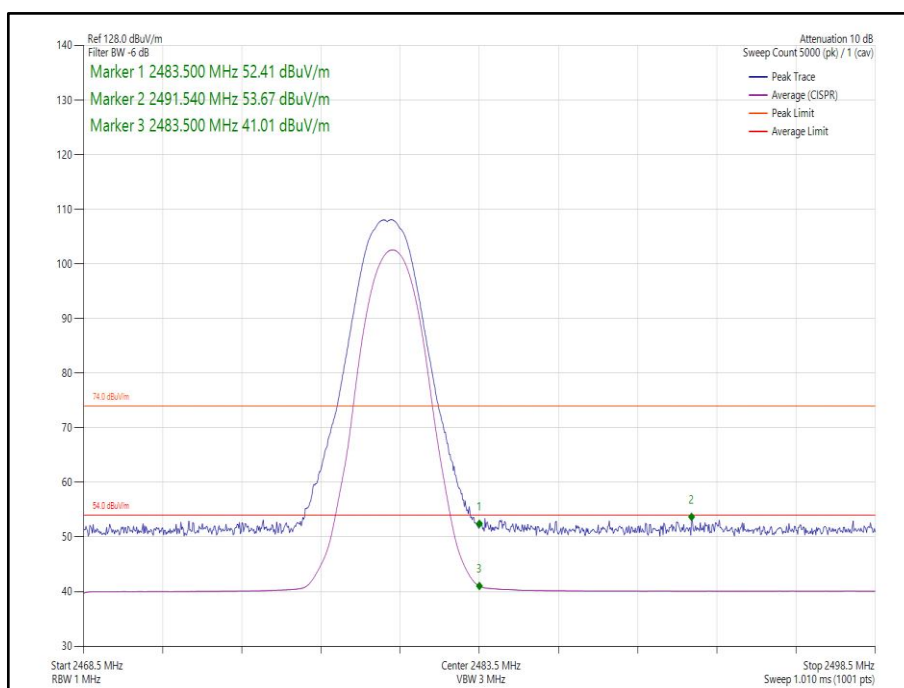


Figure 5 - Static - $\pi/4$ DQPSK/2DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

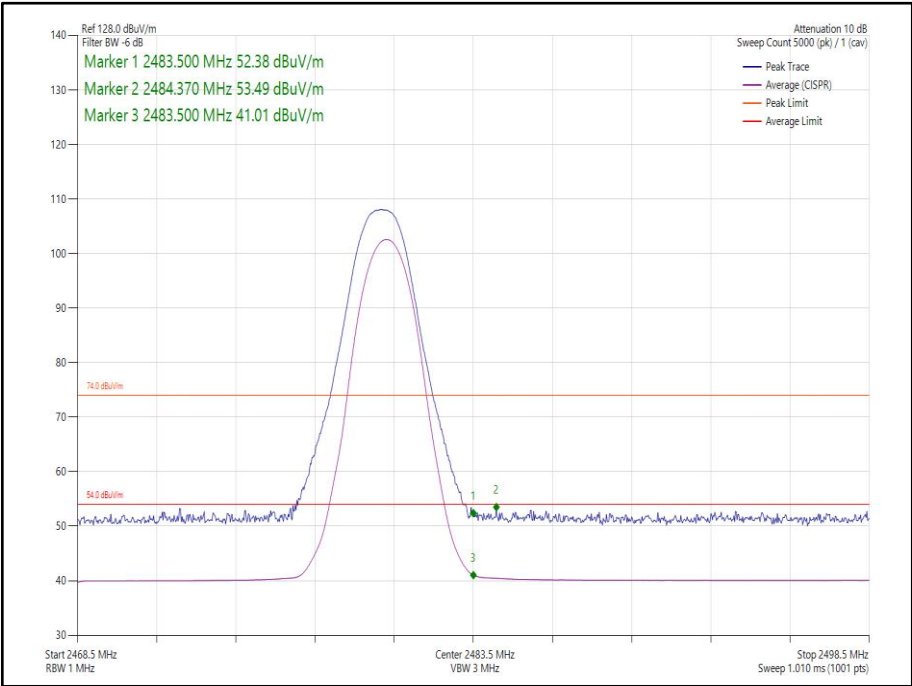


Figure 6 - Static - 8-DPSK/3DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

2.4 GHz Bluetooth (FHSS)

iPA

Mode	Modulation	Core	Packet Type	Tx Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
Static	GFSK	1	DH5	2402	2390.0	59.67	44.80
Static	$\pi/4$ DQPSK	1	2DH5	2402	2390.0	59.37	44.78
Static	8-DPSK	1	3DH5	2402	2390.0	59.61	44.79
Static	GFSK	1	DH5	2480	2483.5	55.4	41.63
Static	$\pi/4$ DQPSK	1	2DH5	2480	2483.5	54.43	40.75
Static	8-DPSK	1	3DH5	2480	2483.5	54.05	40.77

Table 8 - Restricted Band Edge Results

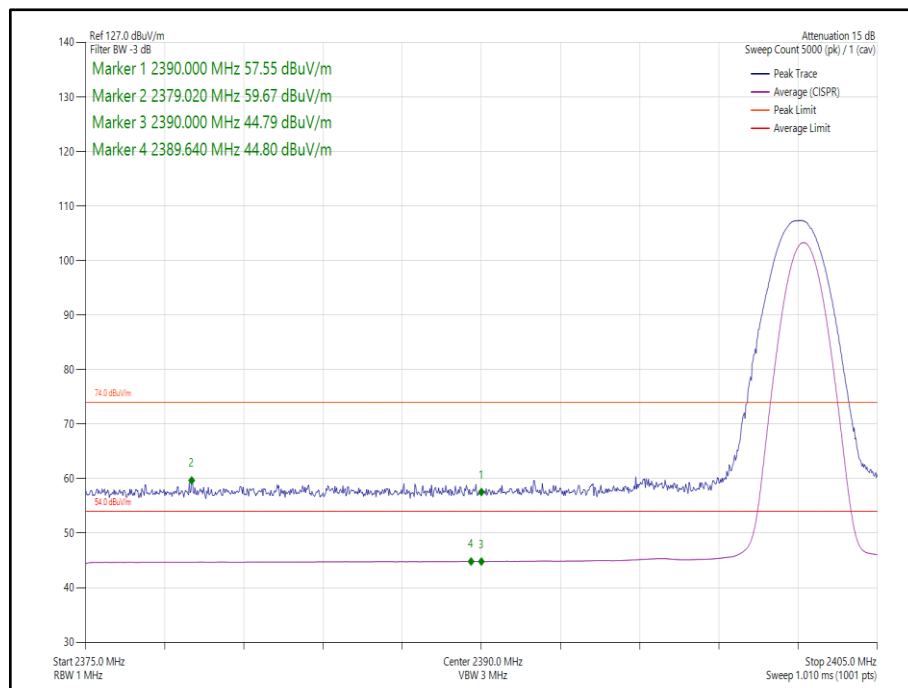


Figure 7 - Static - GFSK/DH5 - 2402 MHz - Band Edge Frequency 2390.0 MHz

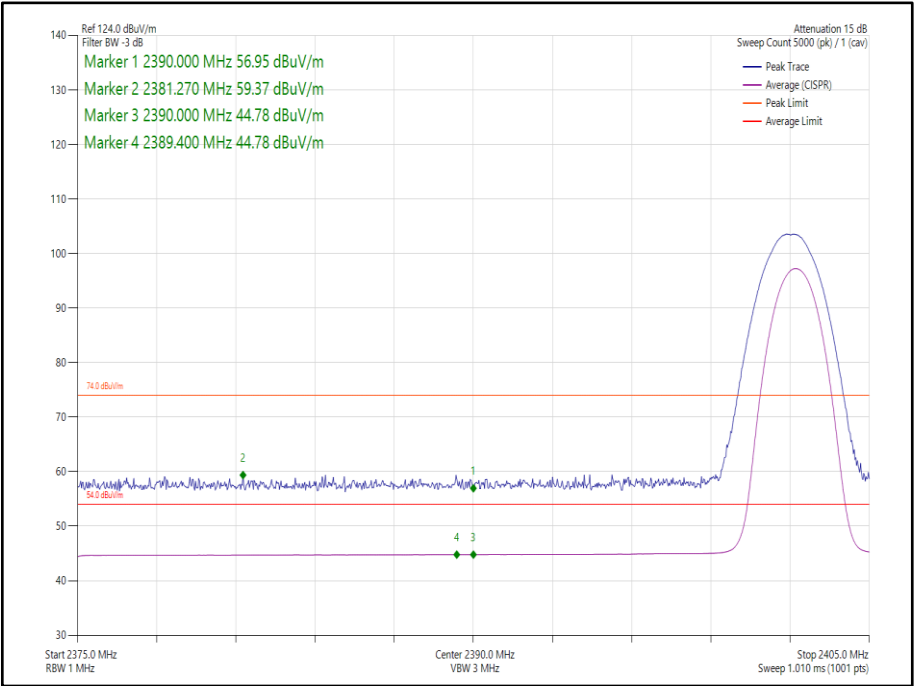


Figure 8 - Static - $\pi/4$ DQPSK/2DH5 - 2402 MHz - Band Edge Frequency 2390.0 MHz

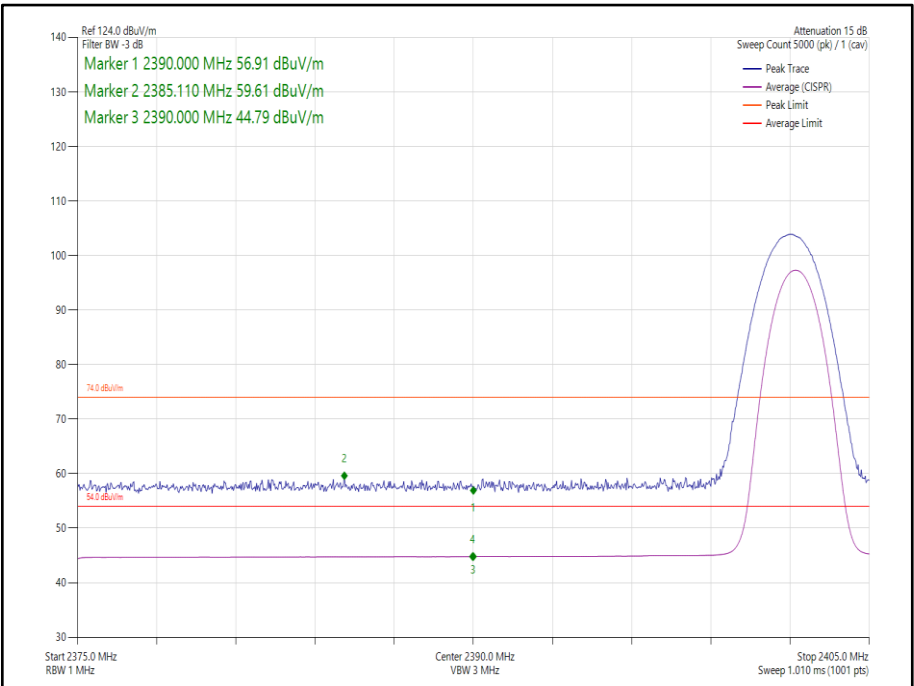


Figure 9 - Static - 8-DPSK/3DH5 - 2402 MHz Band Edge Frequency 2390.0 MHz

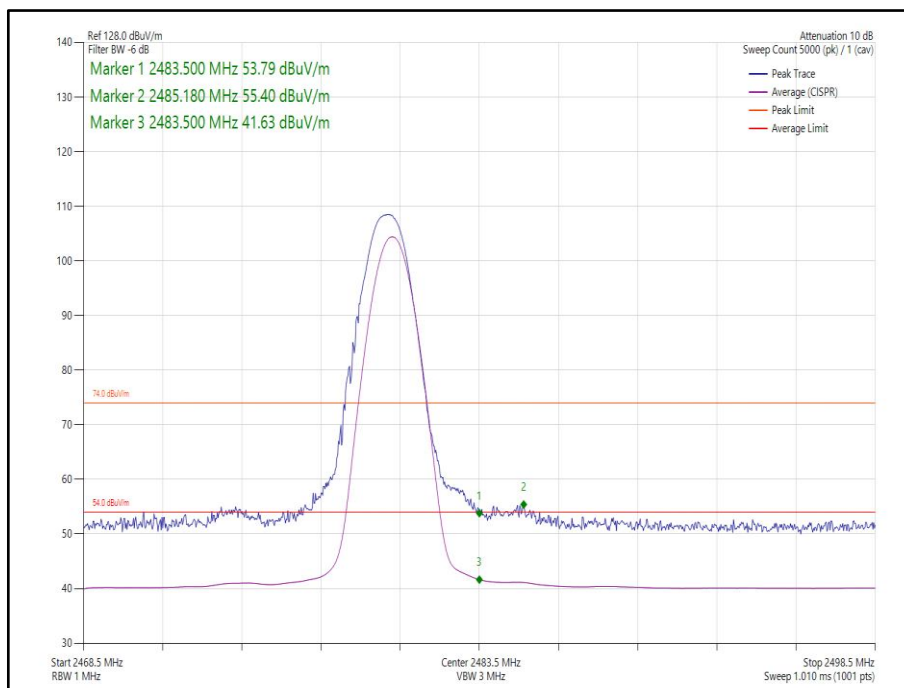


Figure 10 - Static - GFSK/DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

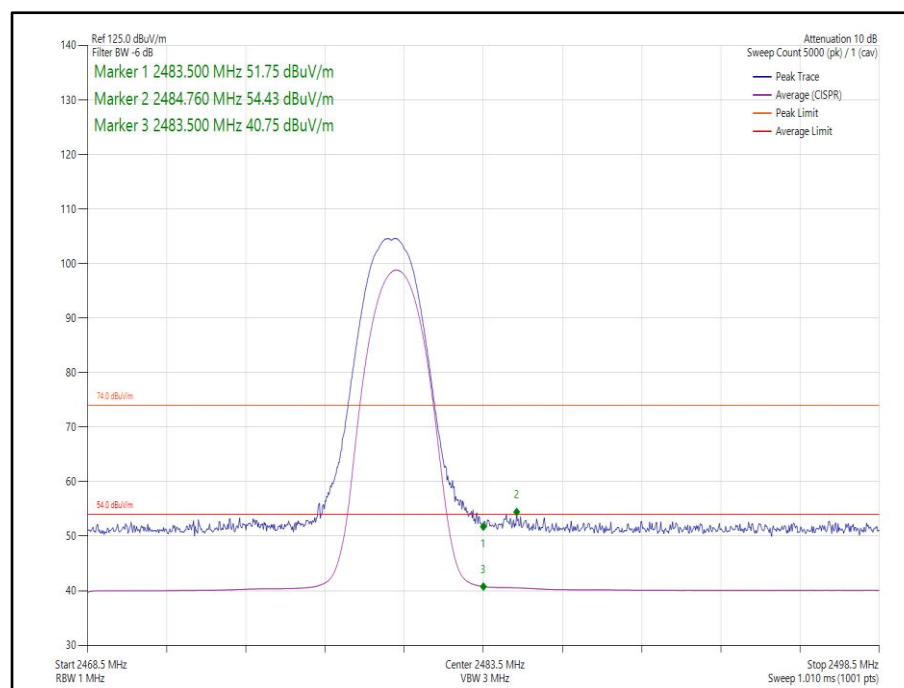


Figure 11 - Static - $\pi/4$ DQPSK/2DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

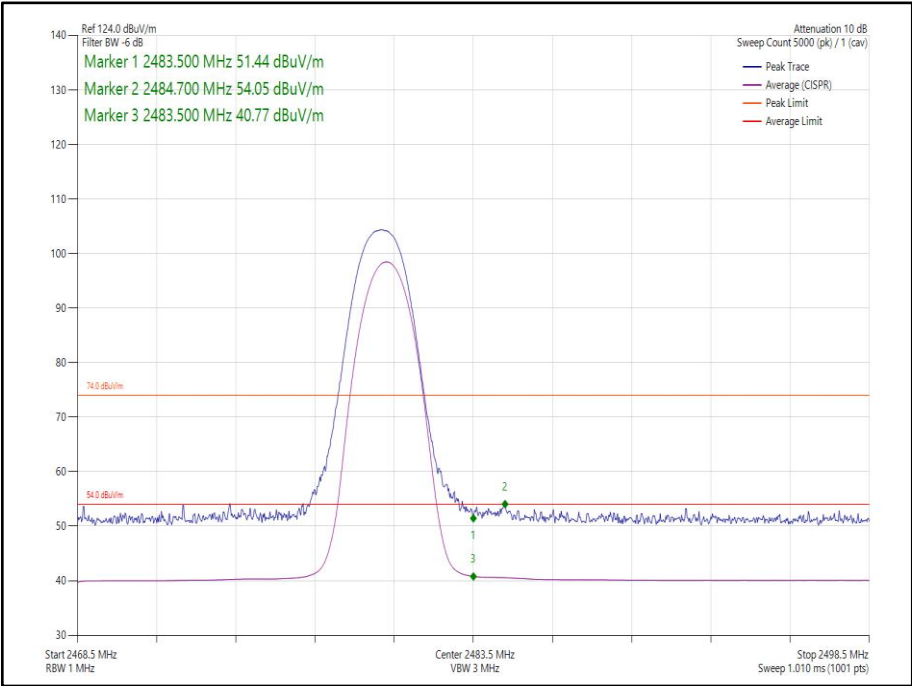


Figure 12 - Static - 8-DPSK/3DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz



2.4 GHz Bluetooth (FHSS)

ePA

Mode	Modulation	Core	Packet Type	Tx Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
Static	GFSK	1	DH5	2402	2390.0	59.35	44.95
Static	$\pi/4$ DQPSK	1	2DH5	2402	2390.0	59.53	44.90
Static	8-DPSK	1	3DH5	2402	2390.0	59.49	44.88
Static	GFSK	1	DH5	2480	2483.5	61.33	46.00
Static	$\pi/4$ DQPSK	1	2DH5	2480	2483.5	59.02	43.05
Static	8-DPSK	1	3DH5	2480	2483.5	58.75	43.29

Table 9 - Restricted Band Edge Results

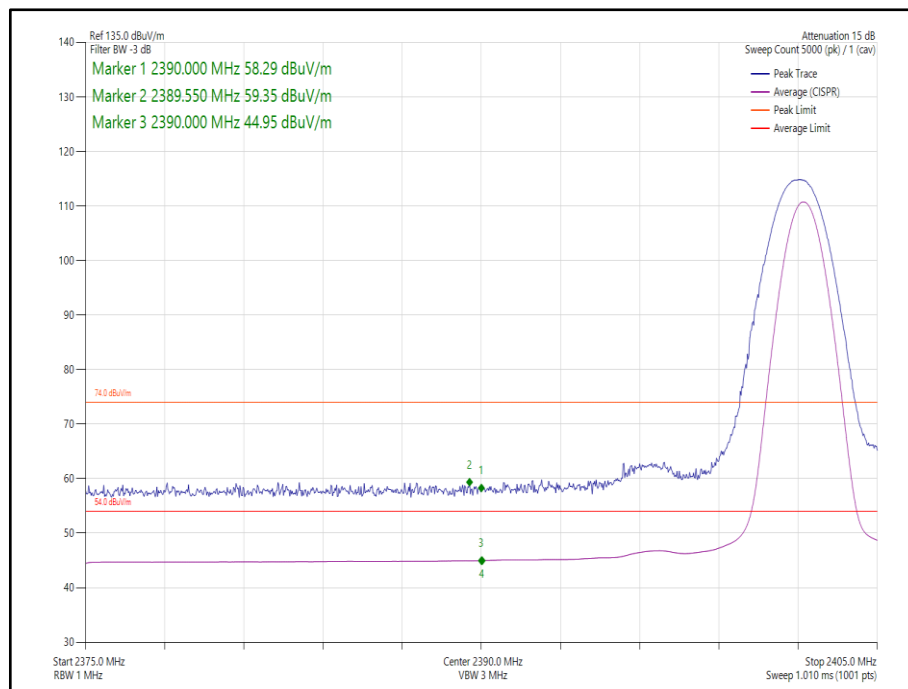


Figure 13 - Static - GFSK/DH5 - 2402 MHz - Band Edge Frequency 2390.0 MHz

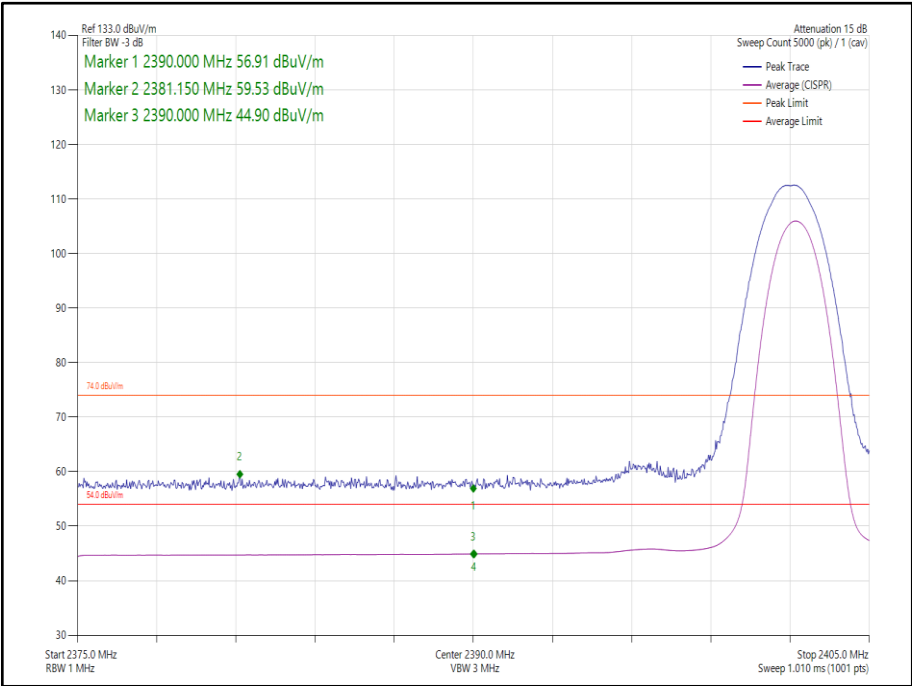


Figure 14 - Static - $\pi/4$ DQPSK/2DH5 - 2402 MHz - Band Edge Frequency 2390.0 MHz

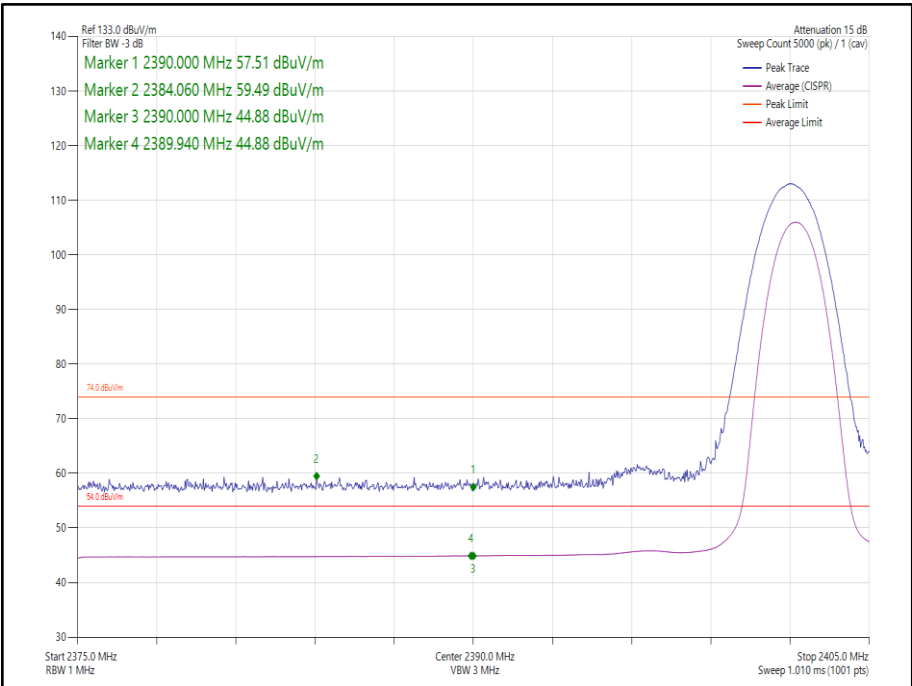


Figure 15 - Static - 8-DPSK/3DH5 - 2402 MHz Band Edge Frequency 2390.0 MHz

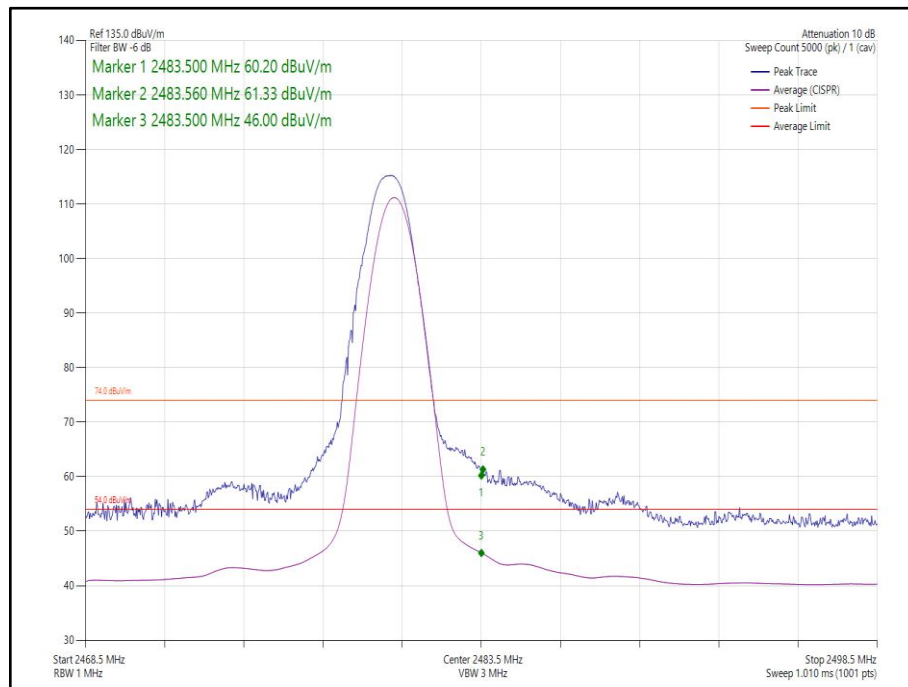


Figure 16 - Static - GFSK/DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

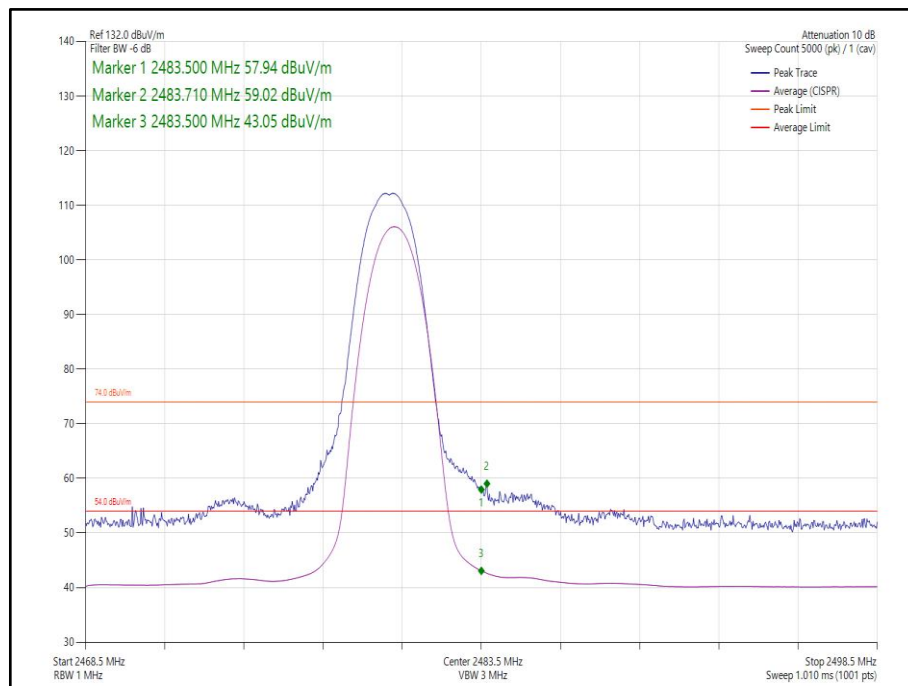


Figure 17 - Static - $\pi/4$ DQPSK/2DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

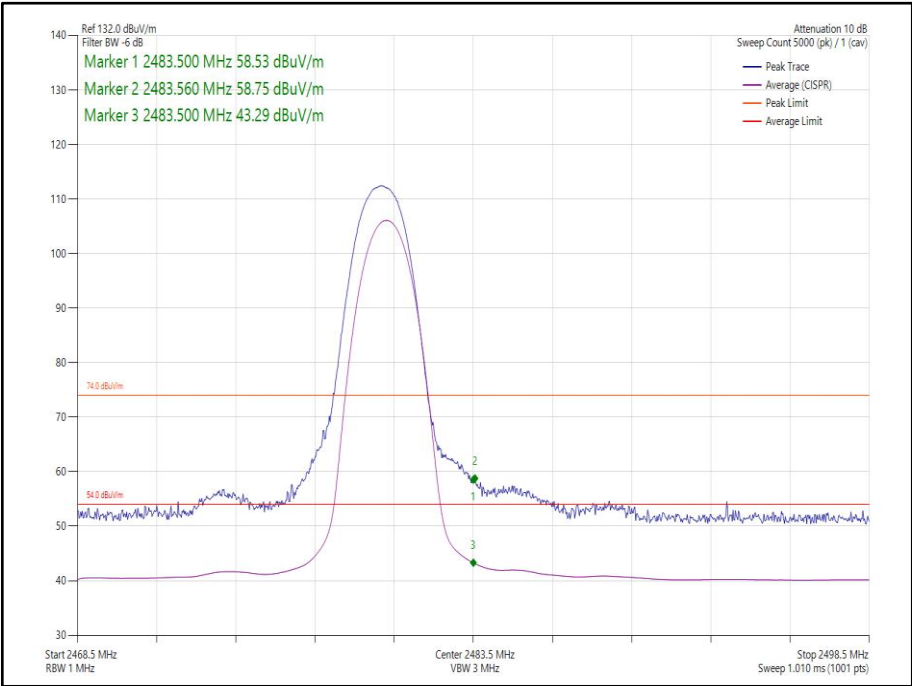


Figure 18 - Static - 8-DPSK/3DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

2.4 GHz Bluetooth (FHSS)

iPA

Mode	Modulation	Core	Packet Type	Tx Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
Static	GFSK	0-1	DH5	2402	2390.0	59.66	44.84
Static	$\pi/4$ DQPSK	0-1	2DH5	2402	2390.0	60.15	44.82
Static	8-DPSK	0-1	3DH5	2402	2390.0	59.82	44.82
Static	GFSK	0-1	DH5	2480	2483.5	54.04	41.29
Static	$\pi/4$ DQPSK	0-1	2DH5	2480	2483.5	53.33	41.50
Static	8-DPSK	0-1	3DH5	2480	2483.5	54.20	41.52

Table 10 - Restricted Band Edge Results

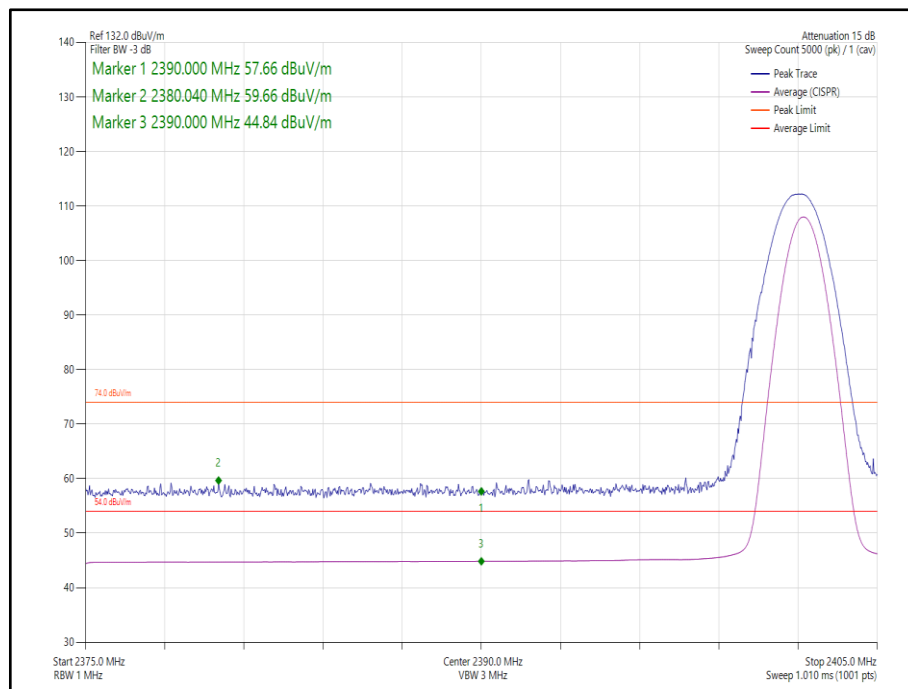


Figure 19 - Static - GFSK/DH5 - 2402 MHz - Band Edge Frequency 2390.0 MHz

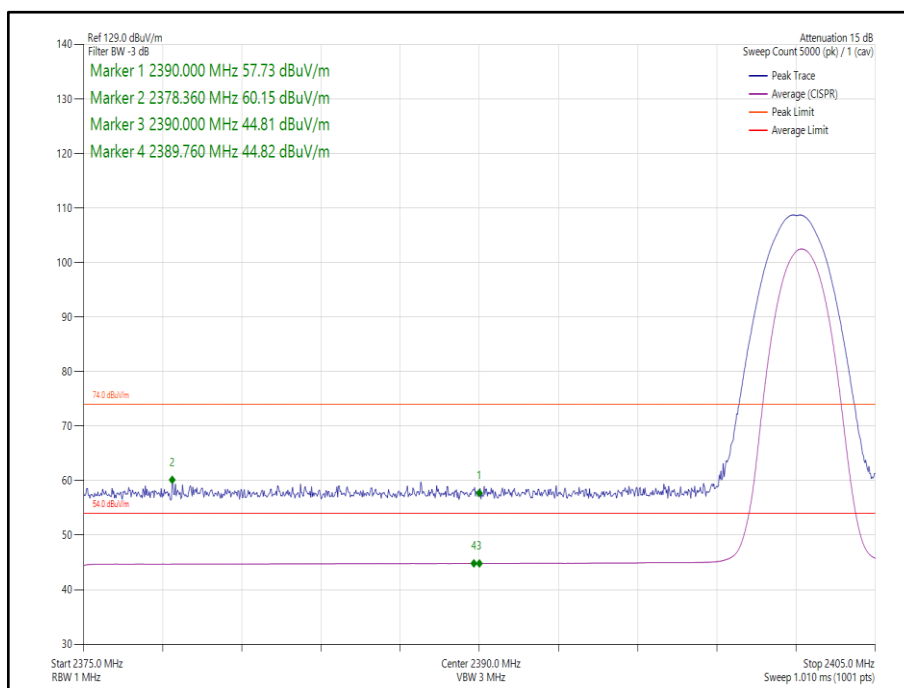


Figure 20 - Static - $\pi/4$ DQPSK/2DH5 - 2402 MHz - Band Edge Frequency 2390.0 MHz

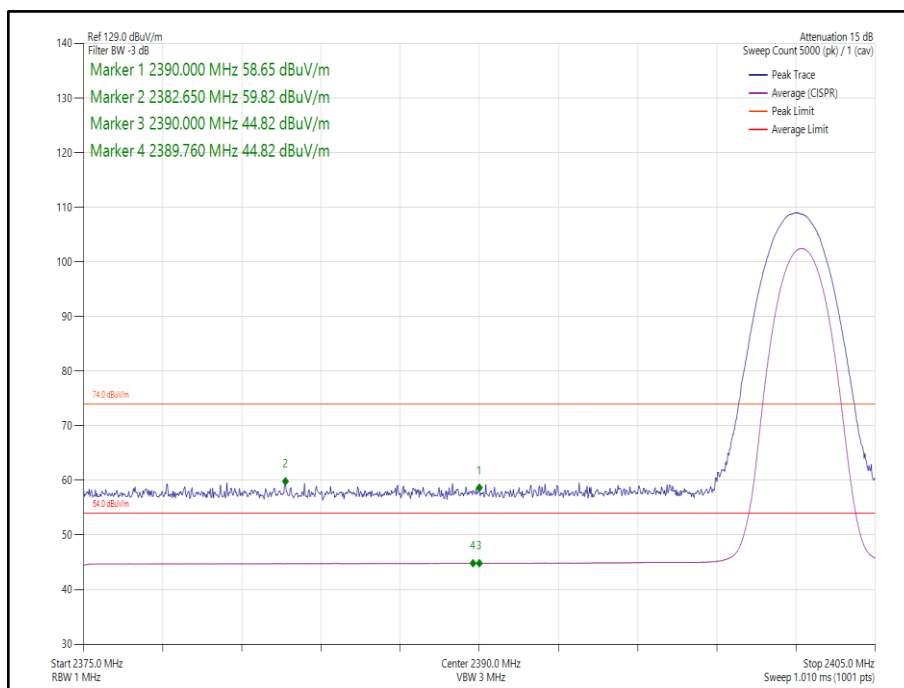


Figure 21 - Static - 8-DPSK/3DH5 - 2402 MHz Band Edge Frequency 2390.0 MHz

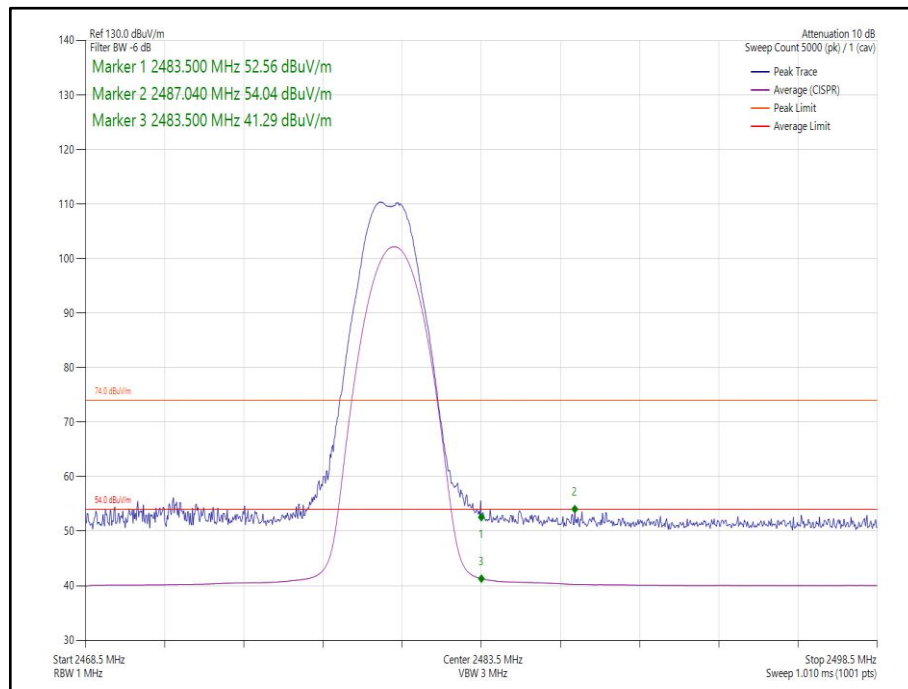


Figure 22 - Static - GFSK/DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

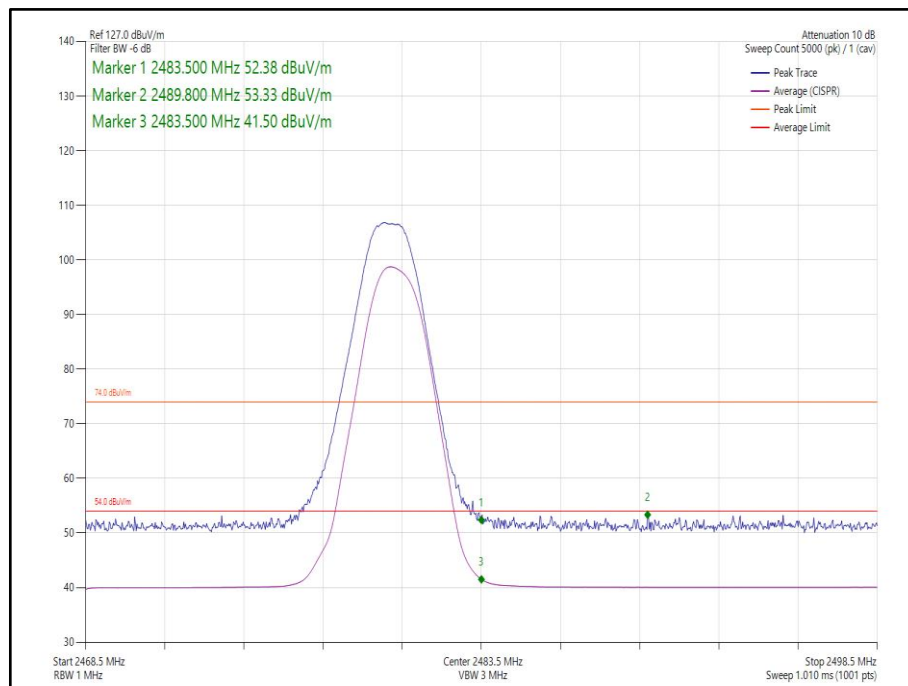


Figure 23 - Static - $\pi/4$ DQPSK/2DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

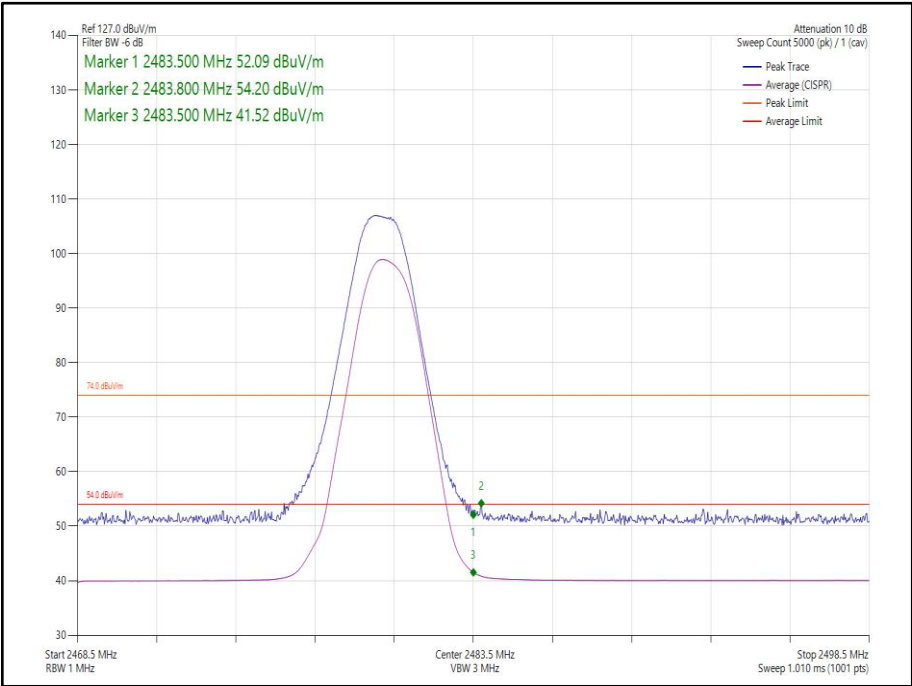


Figure 24 - Static - 8-DPSK/3DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

2.4 GHz Bluetooth (FHSS)

ePA

Mode	Modulation	Core	Packet Type	Tx Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
Static	GFSK	0-1	DH5	2402	2390.0	59.74	44.96
Static	$\pi/4$ DQPSK	0-1	2DH5	2402	2390.0	59.59	44.96
Static	8-DPSK	0-1	3DH5	2402	2390.0	59.60	44.93
Static	GFSK	0-1	DH5	2480	2483.5	59.31	44.98
Static	$\pi/4$ DQPSK	0-1	2DH5	2480	2483.5	55.84	42.16
Static	8-DPSK	0-1	3DH5	2480	2483.5	56.05	42.34

Table 11 - Restricted Band Edge Results

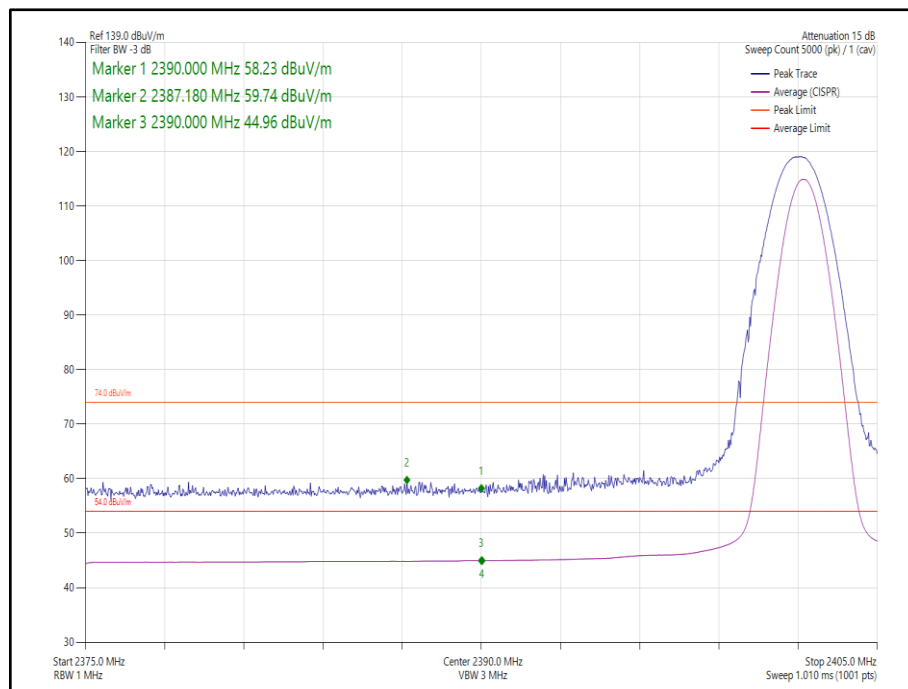


Figure 25 - Static - GFSK/DH5 - 2402 MHz - Band Edge Frequency 2390.0 MHz

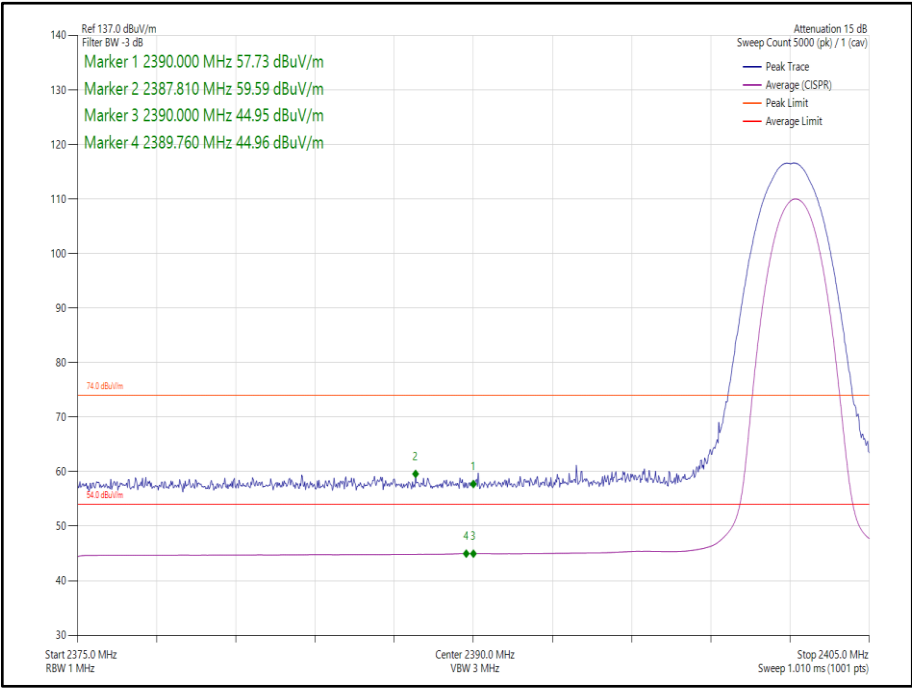


Figure 26 - Static - $\pi/4$ DQPSK/2DH5 - 2402 MHz - Band Edge Frequency 2390.0 MHz

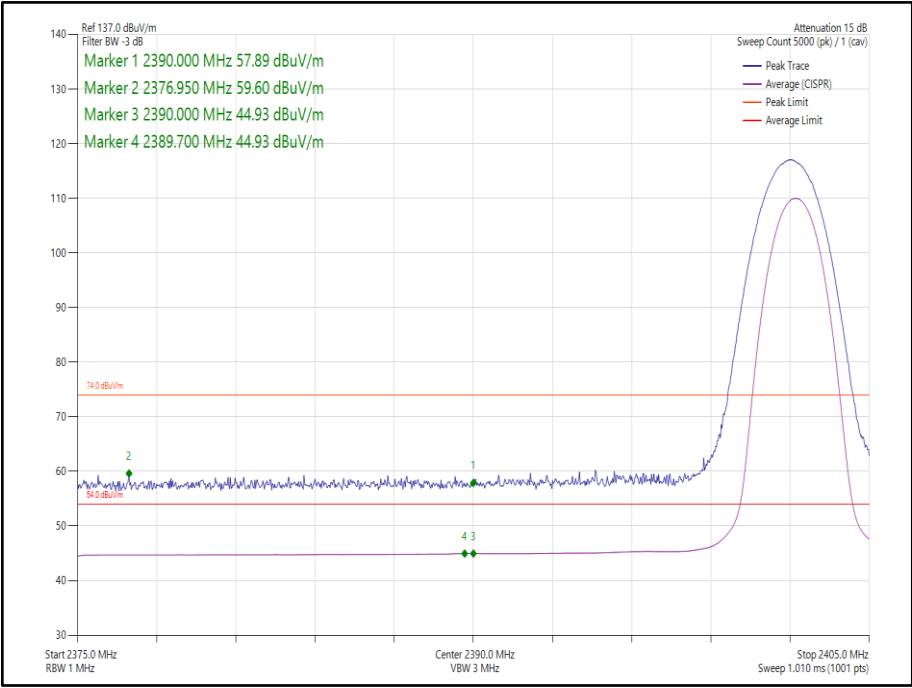


Figure 27 - Static - 8-DPSK/3DH5 - 2402 MHz Band Edge Frequency 2390.0 MHz

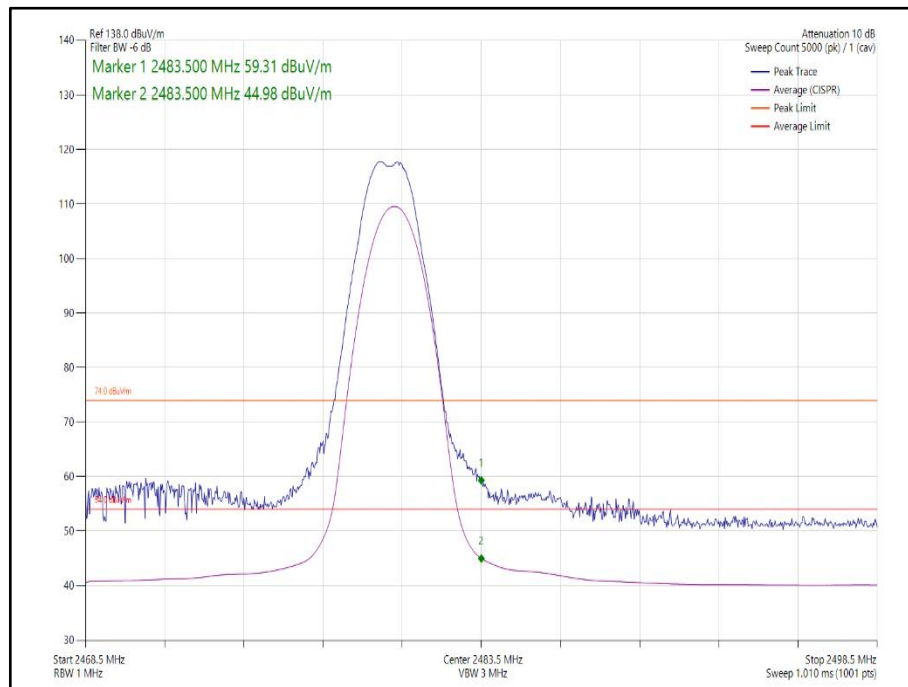


Figure 28 - Static - GFSK/DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

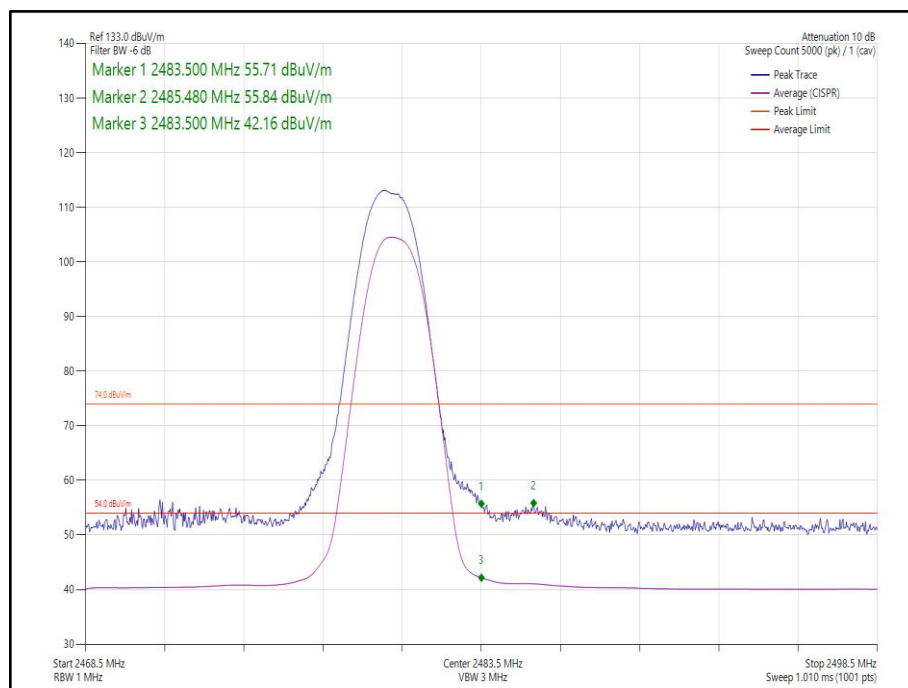


Figure 29 - Static - $\pi/4$ DQPSK/2DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

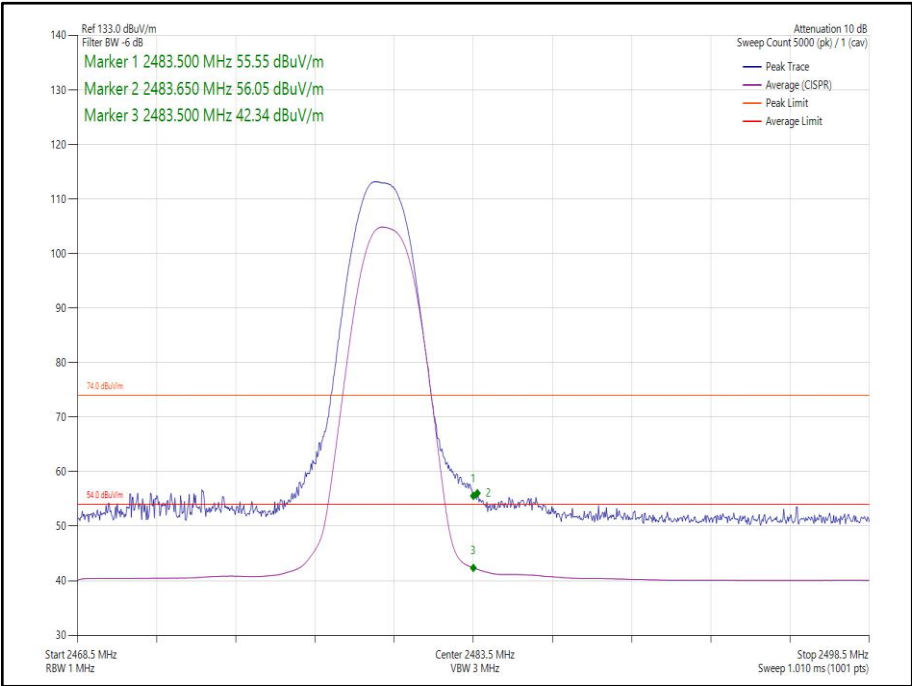


Figure 30 - Static - 8-DPSK/3DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

FCC 47 CFR Part 15, Limit Clause 15.209

Frequency (MHz)	Field Strength (µV/m at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

Table 12

ISED RSS-GEN, Limit Clause 8.9

Frequency (MHz)	Field Strength (µV/m at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960*	500

Table 13

*Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for licence-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.



2.1.7 Test Location and Test Equipment Used

This test was carried out in EMC Chamber 5 and RF Chamber 11.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Screened Room (5)	Rainford	Rainford	1545	36	15-Apr-2024
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Mast Controller	Maturo GmbH	NCD	4810	-	TU
Tilt Antenna Mast	Maturo GmbH	TAM 4.0-P	4811	-	TU
Antenna (DRG 1-10.5GHz)	Schwarzbeck	BBHA9120B	4848	12	28-May-2022
EMI Test Receiver	Rohde & Schwarz	ESW44	5084	12	17-May-2023
Emissions Software	TUV SUD	EmX V3.1.4 V.3.1.4	5125	-	Software
Screened Room (11)	Rainford	Rainford	5136	36	24-Nov-2024
Mast	Maturo	TAM 4.0-P	5158	-	TU
Mast and Turntable Controller	Maturo	Maturo NCD	5159	-	TU
Turntable	Maturo	TT 15WF	5160	-	TU
Antenna (DRG 1-10.5GHz)	Schwarzbeck	BBHA9120B	5215	12	28-May-2022
Cable (SMA to SMA, 2 m)	Junkosha	MWX221-02000AMSAMS/A	5517	12	12-Apr-2023
2m SMA Cable	Junkosha	MWX221-02000AMSAMS/A	5518	12	12-Apr-2023
Cable (N-Type to N-Type, 8 m)	Junkosha	MWX221-08000NMSNMS/B	5520	12	24-Mar-2023
8m N Type Cable	Junkosha	MWX221-08000NMSNMS/B	5522	12	24-Mar-2023
EMI Test Receiver	Rohde & Schwarz	ESW44	5527	12	28-Apr-2023
Thermo-Hygro-Barometer	PCE Instruments	PCE-THB 40	5604	12	22-Sep-2022
Thermo-Hygro-Barometer	PCE Instruments	PCE-THB 40	5605	12	23-Sep-2022

Table 14

TU – Traceability Unscheduled



2.2 Frequency Hopping Systems - Average Time of Occupancy

2.2.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (a)(1)
ISED RSS-247, Clause 5.1

2.2.2 Equipment Under Test and Modification State

A2737, S/N: MW5QG9Q771 - Modification State 0

2.2.3 Date of Test

02-August-2022 to 03-August-2022

2.2.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 7.8.4.

2.2.5 Environmental Conditions

Ambient Temperature	23.1 - 23.8 °C
Relative Humidity	36.5 - 59.5 %



2.2.6 Test Results

2.4 GHz Bluetooth - FHSS

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA GFSK (DH5)	Duty Cycle (%):	76.7
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (BT Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.887	104	300.3	400.0

Table 15 - Time of Occupancy Results

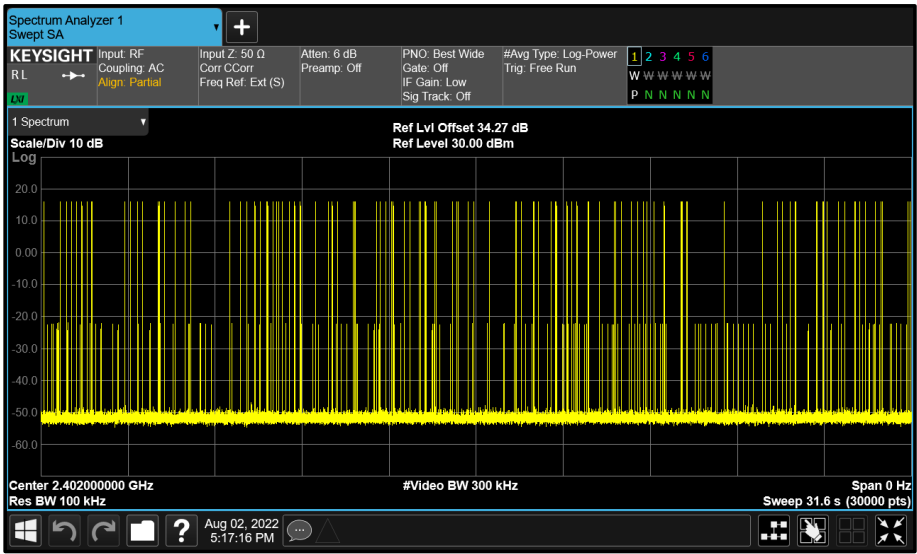


Figure 31 - GFSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	77.1
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (BT Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.890	111	320.8	400.0

Table 16 - Time of Occupancy Results



Figure 32 - $\pi/4$ DQPSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA 8-DPSK (3-DH5)	Duty Cycle (%):	77.1
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (BT Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.892	109	315.3	400.0

Table 17 - Time of Occupancy Results



Figure 33 - 8-DPSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	76.7
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (BT Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.887	101	291.6	400.0

Table 18 - Time of Occupancy Results

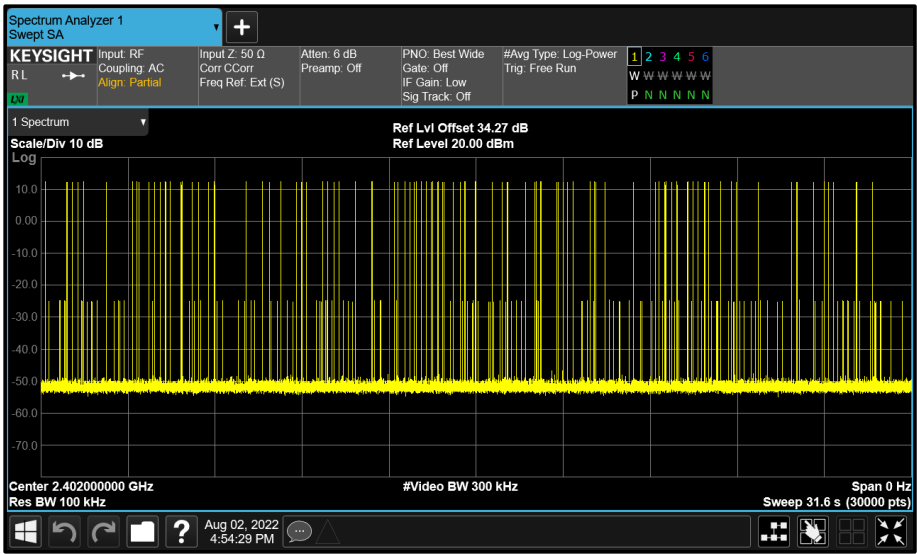


Figure 34 - GFSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	76.7
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (BT Core2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.887	107	308.9	400.0

Table 19 - Time of Occupancy Results



Figure 35 - GFSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	77.1
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (BT Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.890	103	297.7	400.0

Table 20 - Time of Occupancy Results

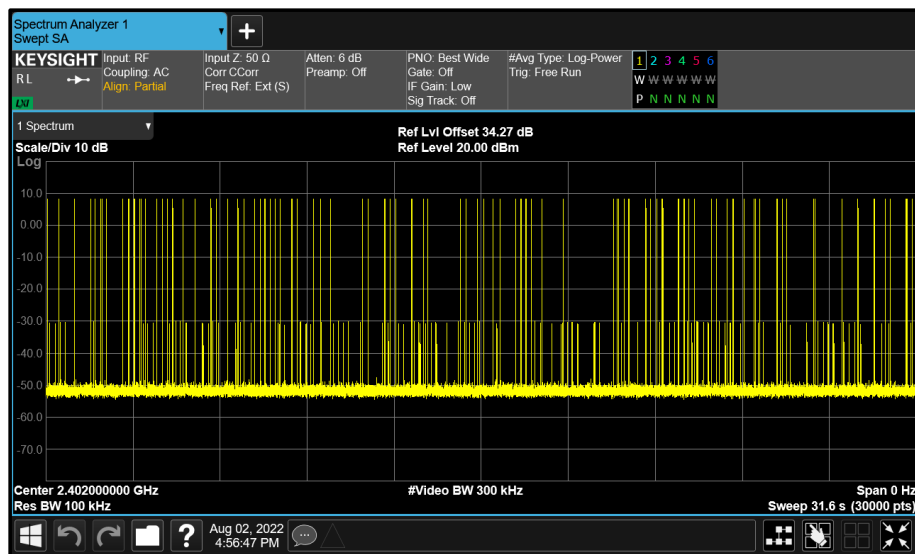


Figure 36 - $\pi/4$ DQPSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	76.9
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (BT Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.892	110	318.1	400.0

Table 21 - Time of Occupancy Results

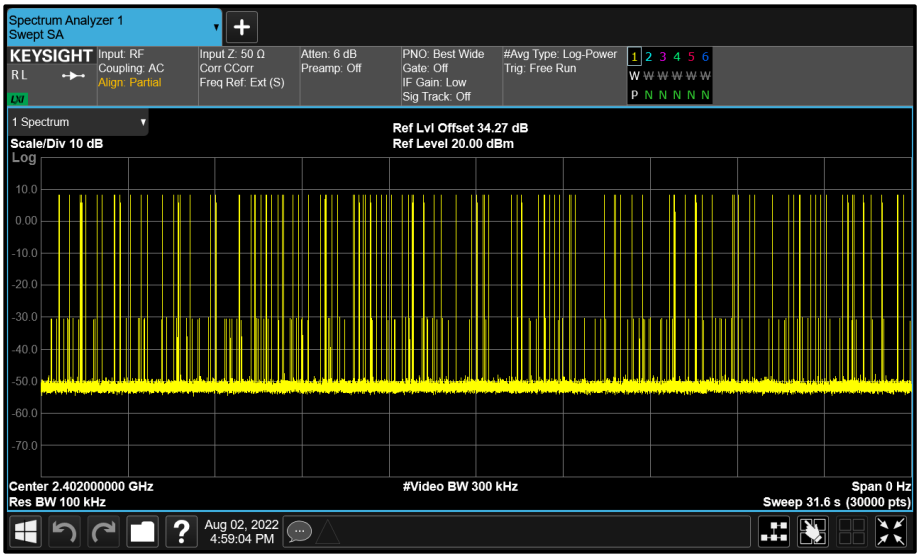


Figure 37 - 8-DPSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	76.8
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (BT Core2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.890	107	309.3	400.0

Table 22 - Time of Occupancy Results

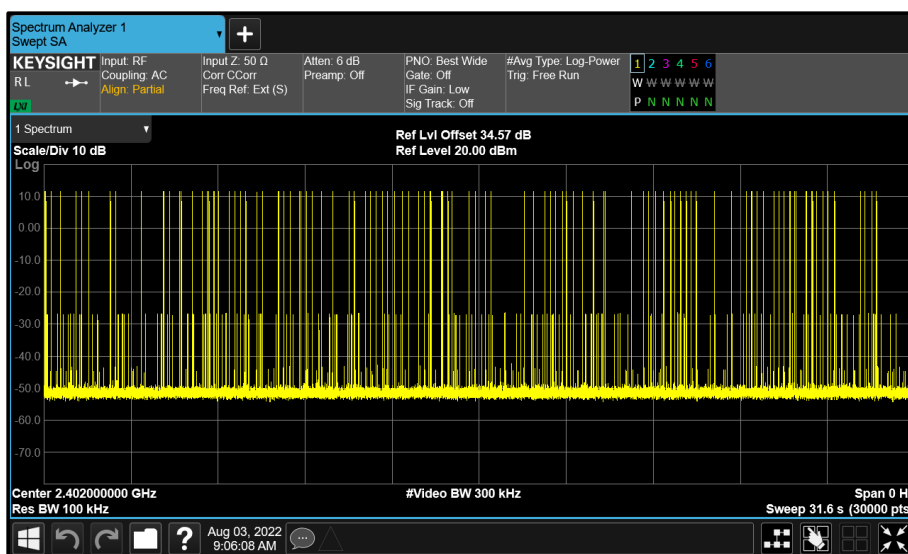


Figure 38 - $\pi/4$ DQPSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	77.1
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (BT Core2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.892	102	295.0	400.0

Table 23 - Time of Occupancy Results



Figure 39 - 8-DPSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA GFSK (DH5)	Duty Cycle (%):	76.7
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (BT Core 0 + BT Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.887	104	300.3	400.0

Table 24 - Time of Occupancy Results

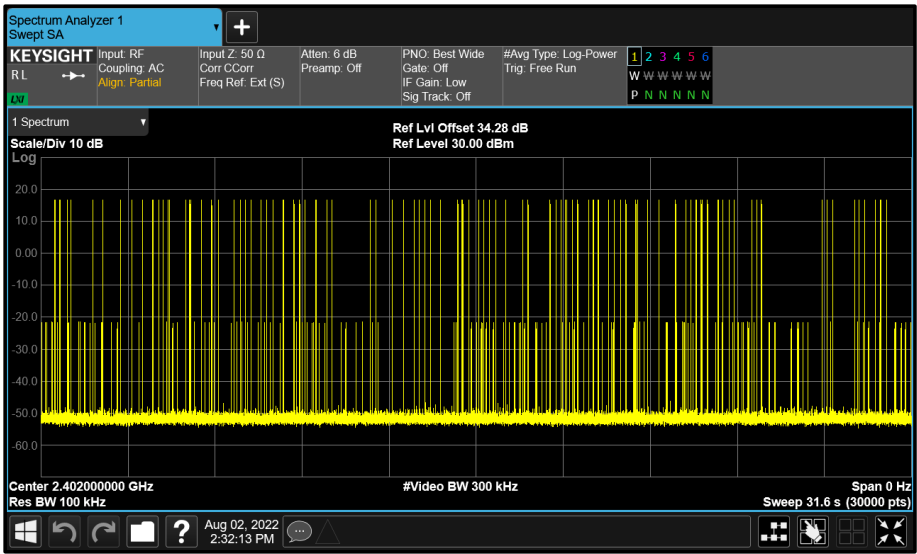


Figure 40 - GFSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	77.1
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (BT Core 0 + BT Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.890	108	312.2	400.0

Table 25 - Time of Occupancy Results

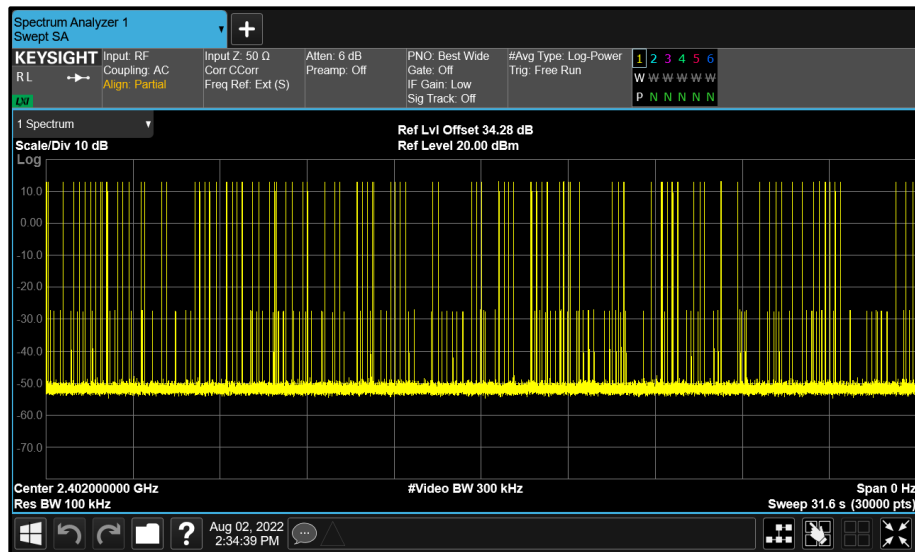


Figure 41 - $\pi/4$ DQPSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA 8-DPSK (3-DH5)	Duty Cycle (%):	77.1
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (BT Core 0 + BT Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.892	99	286.3	400.0

Table 26 - Time of Occupancy Results

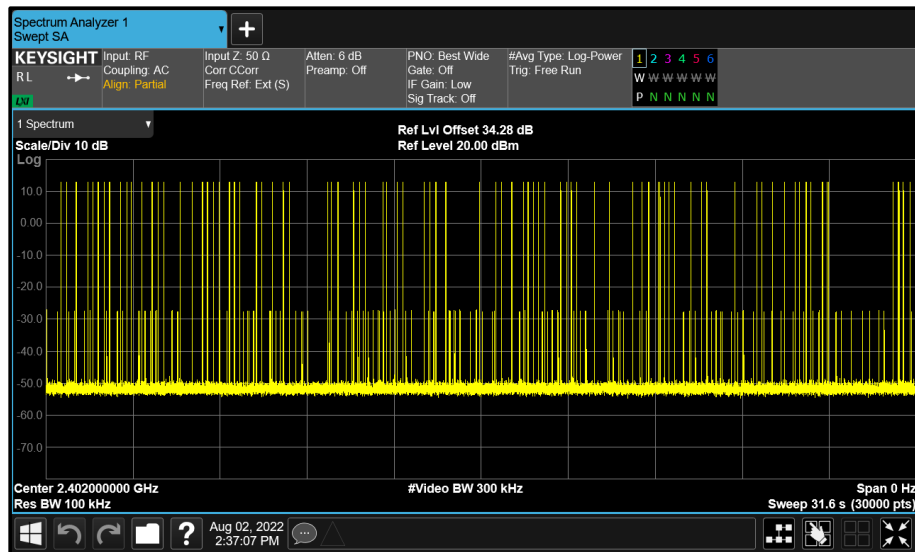


Figure 42 - 8-DPSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	76.7
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (BT Core 0 + BT Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.887	112	323.3	400.0

Table 27 - Time of Occupancy Results



Figure 43 - GFSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	77.1
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (BT Core 0 + BT Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.890	96	277.4	400.0

Table 28 - Time of Occupancy Results

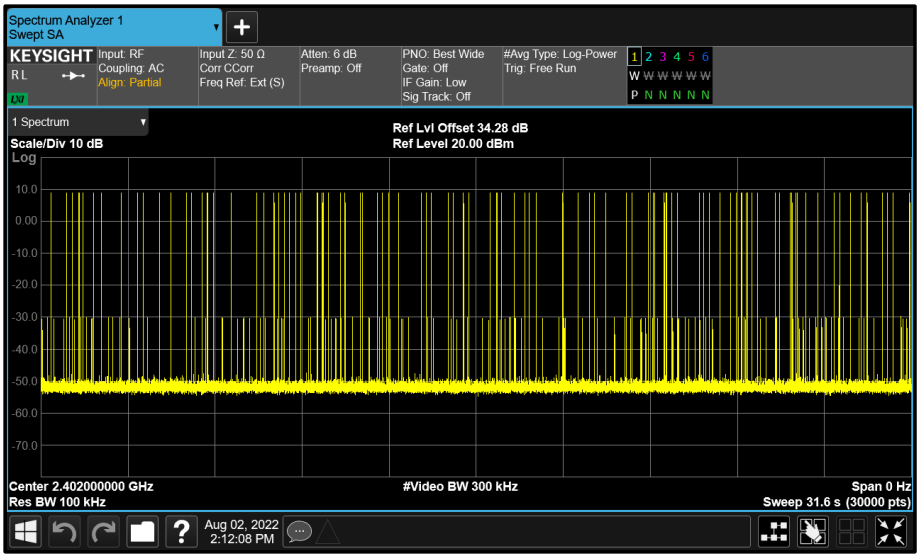


Figure 44 - $\pi/4$ DQPSK - 2402 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	76.8
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (BT Core 0 + BT Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.892	109	315.2	400.0

Table 29 - Time of Occupancy Results

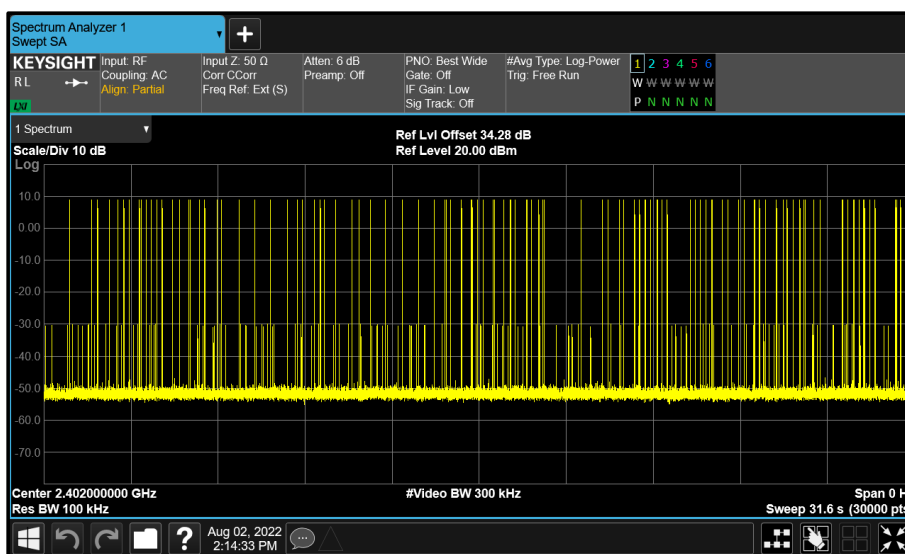


Figure 45 - 8-DPSK - 2402 MHz Accumulated Transmit Time

FCC 47 CFR Part 15, Limit Clause 15.247 (a)(1)(iii)

Frequency hopping systems operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that a minimum of 15 hopping channels are used.

Industry Canada RSS-247, Limit Clause 5.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed.



2.2.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
Multimeter	Fluke	79 Series III	611	12	21-Dec-2022
Hygrometer	Rotronic	I-1000	3220	12	05-Nov-2022
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	01-Feb-2023
AC Programmable Power Supply	iTech	IT7324	5225	-	O/P Mon
MXA Signal Analyser	Keysight Technologies	N9020B	5528	24	21-Mar-2024
Signal Conditioning Unit	TUV SUD	SPECTRUM SCU001	5546	12	06-Apr-2023

Table 30

O/P Mon – Output Monitored using calibrated equipment



2.3 Frequency Hopping Systems - Channel Separation

2.3.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (a)(1)
ISED RSS-247, Clause 5.1

2.3.2 Equipment Under Test and Modification State

A2737, S/N: MW5QG9Q771 - Modification State 0

2.3.3 Date of Test

02-August-2022 to 03-August-2022

2.3.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 7.8.2.

2.3.5 Environmental Conditions

Ambient Temperature	23.1 - 23.8 °C
Relative Humidity	36.5 - 59.5 %

2.3.6 Test Results

2.4 GHz Bluetooth - FHSS

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA GFSK (DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (BT Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	0.929	2441.023	2442.024	1.001	≥619.0

Table 31 - Carrier Frequency Separation Results

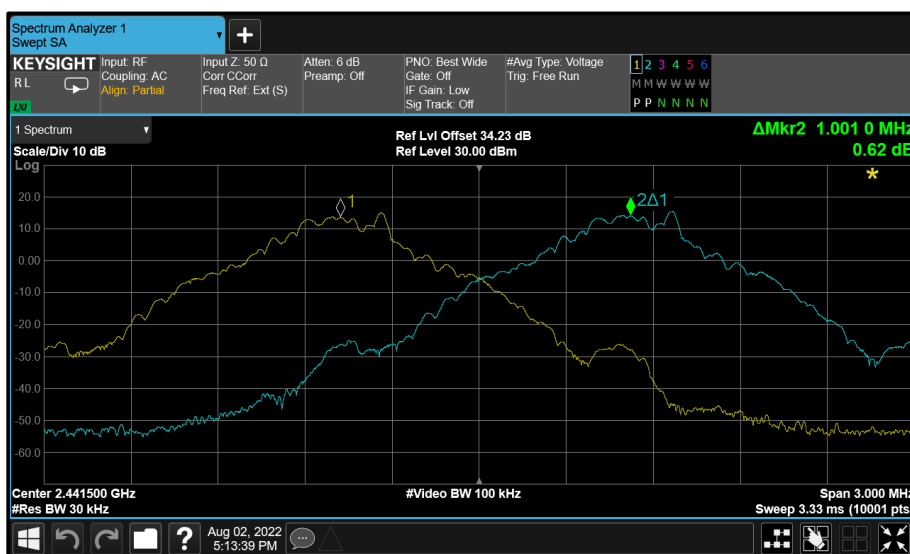


Figure 46 - GFSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (BT Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.355	2441.005	2442.004	0.999	≥ 903.2

Table 32 - Carrier Frequency Separation Results



Figure 47 - $\pi/4$ DQPSK - 2441 MHz (CH39)



Test Configuration				
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz	
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2	
Additional Reference(s):	-			

DUT Configuration			
Mode:	ePA 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (BT Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.328	2441.012	2442.012	1.000	≥885.6

Table 33 - Carrier Frequency Separation Results



Figure 48 - 8-DPSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (BT Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	0.930	2441.025	2442.026	1.001	≥620.2

Table 34 - Carrier Frequency Separation Results



Figure 49 - GFSK - 2441 MHz (CH39)



Test Configuration					
Frequency Range:		2400-2483.5 MHz		Band:	2.4 GHz
Limit Clause(s):		FCC 15.247(a)(1) RSS-247 5.1 b)		Test Method(s):	C63.10 7.8.2
Additional Reference(s):		-			

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (BT Core2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	0.929	2441.026	2442.025	0.999	≥619.4

Table 35 - Carrier Frequency Separation Results

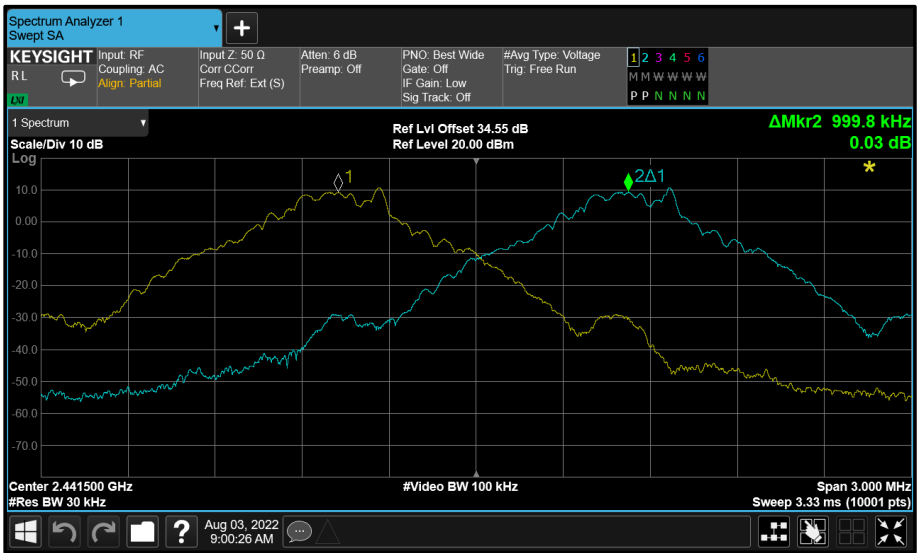


Figure 50 - GFSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (BT Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.354	2441.007	2442.006	0.999	≥ 902.4

Table 36 - Carrier Frequency Separation Results



Figure 51 - $\pi/4$ DQPSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (BT Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.326	2441.014	2442.014	1.000	≥884.0

Table 37 - Carrier Frequency Separation Results

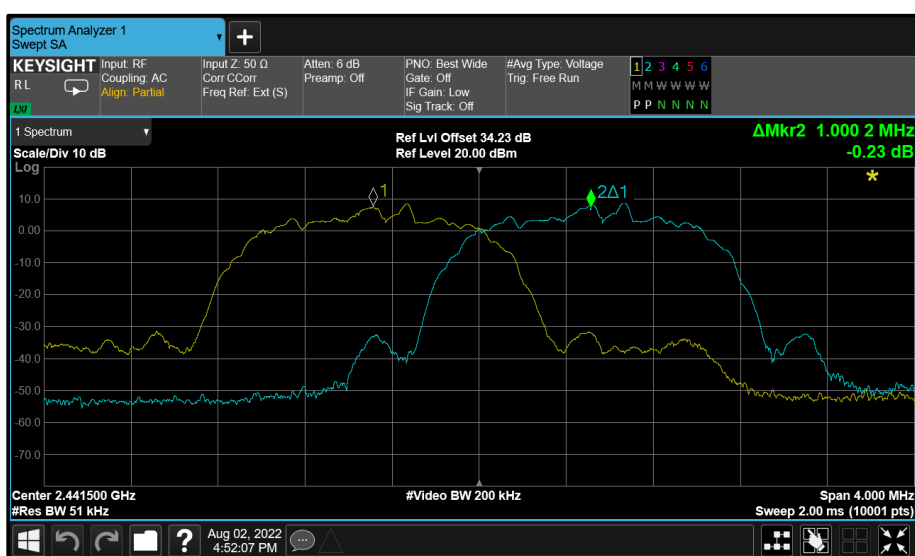


Figure 52 - 8-DPSK - 2441 MHz (CH39)



Test Configuration				
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz	
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2	
Additional Reference(s):	-			

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (BT Core2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.353	2441.008	2442.007	0.999	≥ 901.9

Table 38 - Carrier Frequency Separation Results

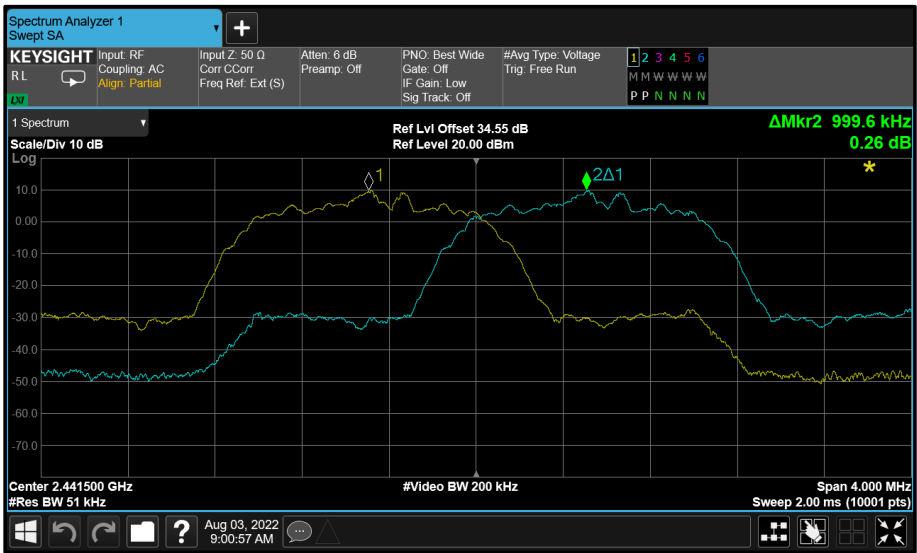


Figure 53 - $\pi/4$ DQPSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (BT Core2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.326	2441.014	2442.014	1.000	≥884.0

Table 39 - Carrier Frequency Separation Results



Figure 54 - 8-DPSK - 2441 MHz (CH39)



Test Configuration				
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz	
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2	
Additional Reference(s):	-			

DUT Configuration			
Mode:	ePA GFSK (DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (BT Core 0 + BT Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	0.927	2441.019	2442.019	1.000	≥618.0

Table 40 - Carrier Frequency Separation Results

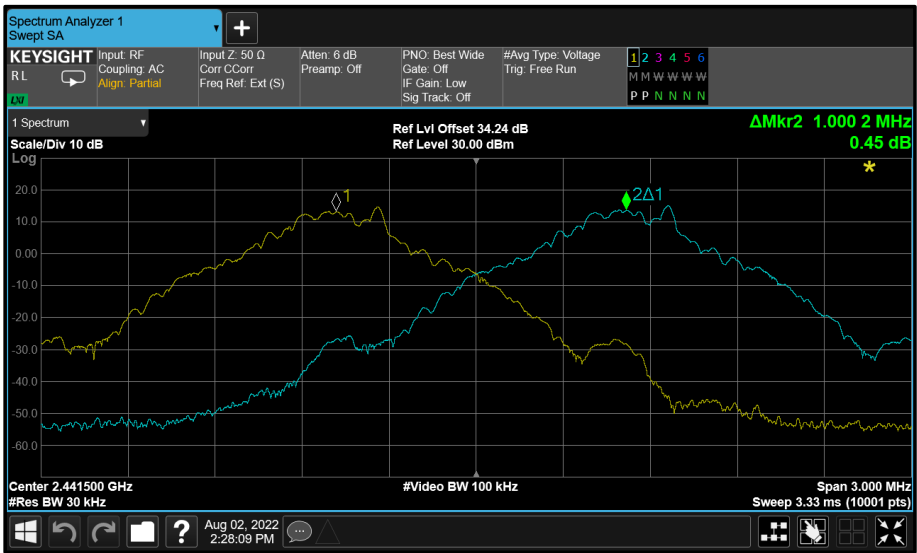


Figure 55 - GFSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (BT Core 0 + BT Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.354	2441.002	2442.002	1.000	≥ 902.4

Table 41 - Carrier Frequency Separation Results



Figure 56 - $\pi/4$ DQPSK - 2441 MHz (CH39)



Test Configuration				
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz	
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2	
Additional Reference(s):	-			

DUT Configuration			
Mode:	ePA 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (BT Core 0 + BT Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.328	2441.010	2442.010	1.000	≥885.3

Table 42 - Carrier Frequency Separation Results

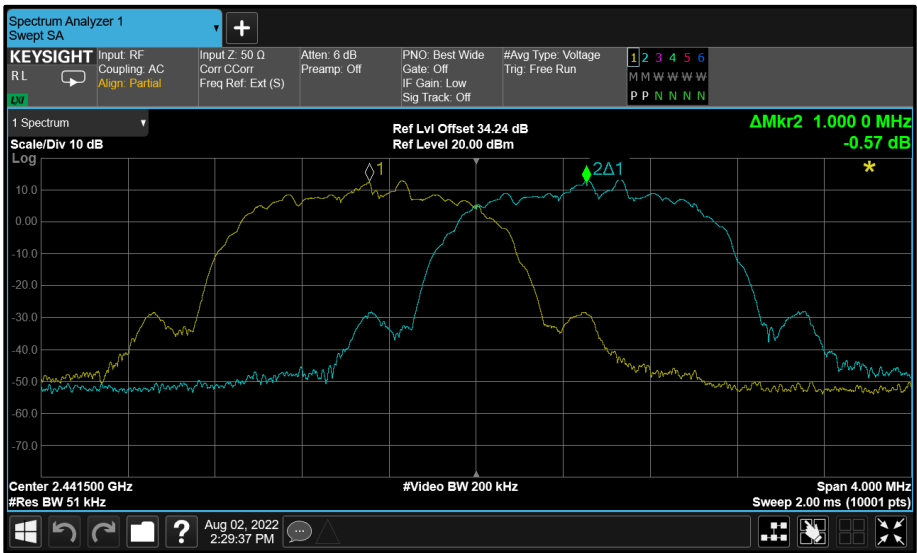


Figure 57 - 8-DPSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (BT Core 0 + BT Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	0.929	2441.024	2442.023	0.999	≥619.4

Table 43 - Carrier Frequency Separation Results



Figure 58 - GFSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (BT Core 0 + BT Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.351	2441.006	2442.006	1.000	≥ 900.8

Table 44 - Carrier Frequency Separation Results

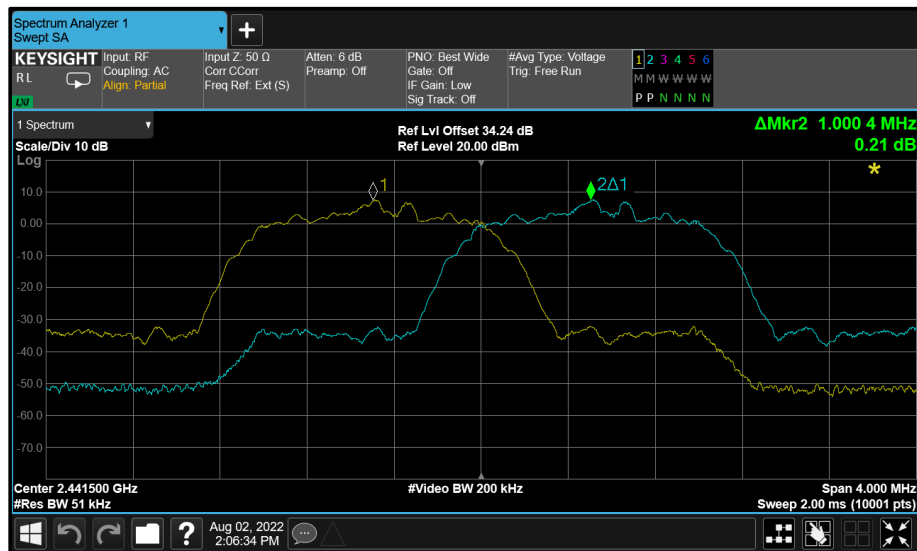


Figure 59 - $\pi/4$ DQPSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (BT Core 0 + BT Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.325	2441.013	2442.013	1.000	≥883.5

Table 45 - Carrier Frequency Separation Results

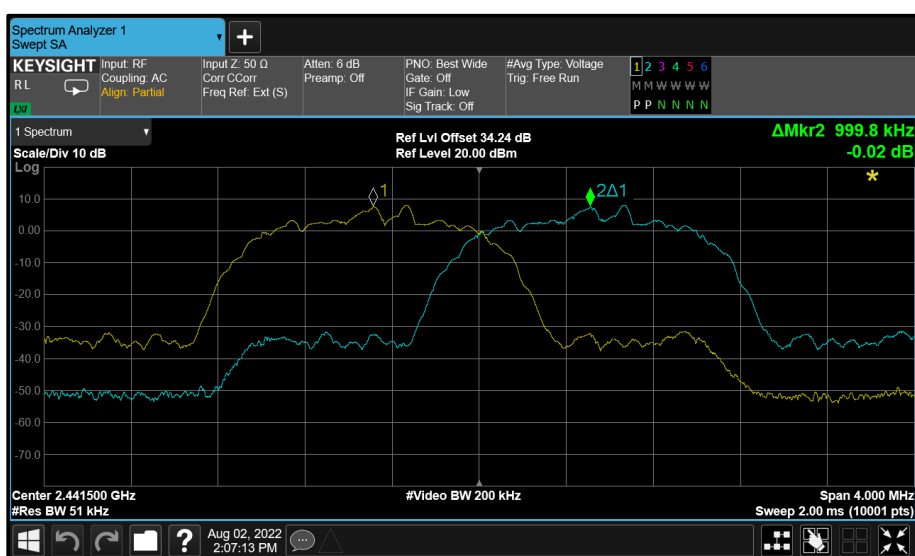


Figure 60 - 8-DPSK - 2441 MHz (CH39)



FCC 47 CFR Part 15, Limit Clause 15.247 (a)(1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125 W.

ISED RSS-247, Limit Clause 5.1 (b)

FHSs shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

2.3.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
Multimeter	Fluke	79 Series III	611	12	21-Dec-2022
Hygrometer	Rotronic	I-1000	3220	12	05-Nov-2022
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	01-Feb-2023
AC Programmable Power Supply	iTech	IT7324	5225	-	O/P Mon
MXA Signal Analyser	Keysight Technologies	N9020B	5528	24	21-Mar-2024
Signal Conditioning Unit	TUV SUD	SPECTRUM SCU001	5546	12	06-Apr-2023

Table 46

O/P Mon – Output Monitored using calibrated equipment