



# Element Washington DC LLC

18855 Adams Court, Morgan Hill, CA 95037 USA

Tel. 410.290.6652 / Fax 410.290.6654

<http://www.element.com>



## PART 24 MEASUREMENT REPORT

**Applicant Name:**

Apple Inc.  
One Apple Park Way  
Cupertino, CA 95014  
United States

**Date of Testing:**

05/30/2022 - 08/29/2022

**Test Site/Location:**

Element Washington DC LLC Morgan Hill, CA, USA

**Test Report Serial No.:**

1C2205090023-02-R1.BCG

**FCC ID:**

**BCGA2757**

**Applicant Name:**

**Apple Inc.**

**Application Type:**

Certification

**Model:**

A2757 (A2777)

**EUT Type:**

Tablet Device

**FCC Classification:**

PCS Licensed Transmitter (PCB)

**FCC Rule Part:**

24

**Test Procedure(s):**

ANSI C63.26-2015, TIA-603-E-2016, KDB 971168 D01  
v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1C2205090023-02-R1.BCG) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez  
Executive Vice President



FCC ID: BCGA2757		PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device		Page 1 of 207


V2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## T A B L E   O F   C O N T E N T S

1.0	INTRODUCTION .....	5
1.1	Scope .....	5
1.2	Element Washington DC LLC Test Location .....	5
1.3	Test Facility / Accreditations .....	5
2.0	PRODUCT INFORMATION .....	6
2.1	Equipment Description .....	6
2.2	Device Capabilities .....	6
2.3	Antenna Description .....	7
2.4	Test Support Equipment .....	7
2.5	Test Configuration .....	8
2.6	Software and Firmware .....	8
2.7	EMI Suppression Device(s)/Modifications .....	8
3.0	DESCRIPTION OF TESTS .....	9
3.1	Evaluation Procedure .....	9
3.2	Radiated Spurious Emissions .....	9
4.0	MEASUREMENT UNCERTAINTY .....	10
5.0	TEST EQUIPMENT CALIBRATION DATA .....	11
6.0	SAMPLE CALCULATIONS .....	12
7.0	TEST RESULTS .....	13
7.1	Summary .....	13
7.2	Occupied Bandwidth .....	14
7.3	Spurious and Harmonic Emissions at Antenna Terminal .....	46
7.4	Band Edge Emissions at Antenna Terminal .....	63
7.5	Peak-Average Ratio .....	113
7.6	Radiated Power (EIRP) .....	167
7.7	Radiated Spurious Emissions .....	185
7.8	Frequency Stability / Temperature Variation .....	203
8.0	CONCLUSION .....	207

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT	
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Approved by: Technical Manager Page 2 of 207




## PART 24 MEASUREMENT REPORT

Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	OBW [MHz]	PAR at 0.1% [dB]	EIRP		Emission Designator
						Max. Power [W]	Max. Power [dBm]	
WCDMA1900	5 MHz	Spread Spectrum	1852.4 - 1907.6	4.1596	2.88	0.544	27.35	4M16F9W
Band 2	1.4 MHz	QPSK	1850.7 - 1909.3	1.0998	5.37	0.550	27.40	1M10G7W
		16QAM	1850.7 - 1909.3	1.1081	6.16	0.448	26.51	1M11D7W
		64QAM	1850.7 - 1909.3	1.0904	6.56	0.388	25.89	1M09D7W
		256QAM	1850.7 - 1909.3	1.0946	6.90	0.196	22.93	1M10D7W
	3 MHz	QPSK	1851.5 - 1908.5	2.7171	5.22	0.550	27.40	2M72G7W
		16QAM	1851.5 - 1908.5	2.7219	6.11	0.478	26.79	2M72D7W
		64QAM	1851.5 - 1908.5	2.7204	6.52	0.406	26.08	2M72D7W
		256QAM	1851.5 - 1908.5	2.7129	6.84	0.200	23.02	2M71D7W
	5 MHz	QPSK	1852.5 - 1907.5	4.5327	5.26	0.550	27.40	4M53G7W
		16QAM	1852.5 - 1907.5	4.5221	6.00	0.480	26.81	4M52D7W
		64QAM	1852.5 - 1907.5	4.5392	6.56	0.369	25.67	4M54D7W
		256QAM	1852.5 - 1907.5	4.5277	6.77	0.193	22.85	4M53D7W
	10MHz	QPSK	1855 - 1905	9.0004	5.27	0.550	27.40	9M00G7W
		16QAM	1855 - 1905	9.0220	6.03	0.476	26.78	9M02D7W
		64QAM	1855 - 1905	9.0182	6.51	0.401	26.03	9M02D7W
		256QAM	1855 - 1905	8.9940	6.73	0.200	23.00	8M99D7W
	15 MHz	QPSK	1857.5 - 1902.5	13.4938	5.55	0.550	27.40	13M5G7W
		16QAM	1857.5 - 1902.5	13.5045	6.18	0.459	26.62	13M5D7W
		64QAM	1857.5 - 1902.5	13.5209	6.61	0.394	25.96	13M5D7W
		256QAM	1857.5 - 1902.5	13.4970	6.75	0.194	22.87	13M5D7W
	20 MHz	QPSK	1860 - 1900	18.0023	5.31	0.550	27.40	18M0G7W
		16QAM	1860 - 1900	17.9653	5.95	0.455	26.58	18M0D7W
		64QAM	1860 - 1900	18.0341	6.64	0.397	25.99	18M0D7W
		256QAM	1860 - 1900	17.9867	6.82	0.190	22.78	18M0D7W
Band 25	1.4 MHz	QPSK	1850.7 - 1914.3	1.0998	5.35	0.550	27.40	1M10G7W
		16QAM	1850.7 - 1914.3	1.1081	6.07	0.499	26.98	1M11D7W
		64QAM	1850.7 - 1914.3	1.0904	6.76	0.332	25.21	1M09D7W
		256QAM	1850.7 - 1914.3	1.0946	6.91	0.187	22.73	1M10D7W
	3 MHz	QPSK	1851.5 - 1913.5	2.7171	5.17	0.550	27.40	2M72G7W
		16QAM	1851.5 - 1913.5	2.7219	6.06	0.478	26.79	2M72D7W
		64QAM	1851.5 - 1913.5	2.7204	6.63	0.372	25.71	2M72D7W
		256QAM	1851.5 - 1913.5	2.7129	6.98	0.200	23.02	2M71D7W
	5 MHz	QPSK	1852.5 - 1912.5	4.5327	5.27	0.550	27.40	4M53G7W
		16QAM	1852.5 - 1912.5	4.5221	5.94	0.499	26.98	4M52D7W
		64QAM	1852.5 - 1912.5	4.5392	6.54	0.376	25.75	4M54D7W
		256QAM	1852.5 - 1912.5	4.5277	6.95	0.183	22.63	4M53D7W
	10 MHz	QPSK	1855 - 1910	9.0004	5.29	0.550	27.40	9M00G7W
		16QAM	1855 - 1910	9.0220	5.95	0.486	26.87	9M02D7W
		64QAM	1855 - 1910	9.0182	6.55	0.374	25.73	9M02D7W
		256QAM	1855 - 1910	8.9940	6.77	0.204	23.10	8M99D7W
	15 MHz	QPSK	1857.5 - 1907.5	13.4938	5.55	0.550	27.40	13M5G7W
		16QAM	1857.5 - 1907.5	13.5045	6.14	0.478	26.79	13M5D7W
		64QAM	1857.5 - 1907.5	13.5209	6.58	0.408	26.11	13M5D7W
		256QAM	1857.5 - 1907.5	13.4970	7.29	0.194	22.87	13M5D7W
	20 MHz	QPSK	1860 - 1905	18.0023	5.31	0.550	27.40	18M0G7W
		16QAM	1860 - 1905	17.9653	5.98	0.502	27.01	18M0D7W
		64QAM	1860 - 1905	18.0341	6.56	0.410	26.13	18M0D7W
		256QAM	1860 - 1905	17.9867	6.76	0.185	22.68	18M0D7W

### EUT Overview

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device			

V2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	OBW [MHz]	PAR at 0.1% [dB]	EIRP		Emission Designator
						Max. Power [W]	Max. Power [dBm]	
NR Band n2	5 MHz	π/2 BPSK	1852.5 - 1907.5	4.492	4.00	0.523	27.19	4M49G7W
		QPSK	1852.5 - 1907.5	4.528	5.34	0.550	27.40	4M53G7W
		16QAM	1852.5 - 1907.5	4.499	6.42	0.452	26.55	4M50D7W
		64QAM	1852.5 - 1907.5	4.506	6.51	0.306	24.86	4M51D7W
		256QAM	1852.5 - 1907.5	4.498	7.26	0.188	22.74	4M50D7W
	10 MHz	π/2 BPSK	1855 - 1905	9.046	3.97	0.531	27.25	9M05G7W
		QPSK	1855 - 1905	9.340	5.35	0.550	27.40	9M34G7W
		16QAM	1855 - 1905	9.330	6.31	0.449	26.52	9M33D7W
		64QAM	1855 - 1905	9.296	6.68	0.330	25.18	9M30D7W
		256QAM	1855 - 1905	9.310	6.52	0.179	22.52	9M31D7W
	15 MHz	π/2 BPSK	1857.5 - 1902.5	13.519	4.12	0.550	27.40	13M5G7W
		QPSK	1857.5 - 1902.5	14.173	5.46	0.530	27.24	14M2G7W
		16QAM	1857.5 - 1902.5	14.196	6.31	0.448	26.51	14M2D7W
		64QAM	1857.5 - 1902.5	14.188	6.58	0.289	24.61	14M2D7W
		256QAM	1857.5 - 1902.5	14.172	6.58	0.183	22.62	14M2D7W
	20 MHz	π/2 BPSK	1860 - 1900	17.940	4.04	0.550	27.40	17M9G7W
		QPSK	1860 - 1900	19.008	5.41	0.546	27.37	19M0G7W
		16QAM	1860 - 1900	19.003	6.30	0.448	26.51	19M0D7W
		64QAM	1860 - 1900	19.000	6.62	0.329	25.18	19M0D7W
		256QAM	1860 - 1900	19.062	6.65	0.197	22.94	19M1D7W
NR Band n25	5 MHz	π/2 BPSK	1852.5 - 1912.5	4.492	3.97	0.550	27.40	4M49G7W
		QPSK	1852.5 - 1912.5	4.528	5.30	0.534	27.27	4M53G7W
		16QAM	1852.5 - 1912.5	4.499	6.37	0.440	26.44	4M50D7W
		64QAM	1852.5 - 1912.5	4.506	6.63	0.334	25.23	4M51D7W
		256QAM	1852.5 - 1912.5	4.498	6.67	0.189	22.76	4M50D7W
	10 MHz	π/2 BPSK	1855 - 1910	9.046	3.94	0.550	27.40	9M05G7W
		QPSK	1855 - 1910	9.340	5.34	0.524	27.19	9M34G7W
		16QAM	1855 - 1910	9.330	6.32	0.476	26.78	9M33D7W
		64QAM	1855 - 1910	9.296	6.58	0.323	25.09	9M30D7W
		256QAM	1855 - 1910	9.310	6.60	0.198	22.96	9M31D7W
	15 MHz	π/2 BPSK	1857.5 - 1907.5	13.519	4.06	0.523	27.19	13M5G7W
		QPSK	1857.5 - 1907.5	14.173	5.39	0.550	27.40	14M2G7W
		16QAM	1857.5 - 1907.5	14.196	6.33	0.447	26.50	14M2D7W
		64QAM	1857.5 - 1907.5	14.188	6.54	0.302	24.80	14M2D7W
		256QAM	1857.5 - 1907.5	14.172	6.76	0.180	22.55	14M2D7W
	20 MHz	π/2 BPSK	1860 - 1905	17.940	3.98	0.539	27.31	17M9G7W
		QPSK	1860 - 1905	19.008	5.37	0.550	27.40	19M0G7W
		16QAM	1860 - 1905	19.003	6.25	0.492	26.92	19M0D7W
		64QAM	1860 - 1905	19.000	6.62	0.323	25.10	19M0D7W
		256QAM	1860 - 1905	19.062	6.58	0.191	22.81	19M1D7W
	25 MHz	π/2 BPSK	1862.5 - 1902.5	23.003	3.89	0.527	27.22	23M0G7W
		QPSK	1862.5 - 1902.5	23.875	5.36	0.550	27.40	23M9G7W
		16QAM	1862.5 - 1902.5	23.880	6.28	0.434	26.38	23M9D7W
		64QAM	1862.5 - 1902.5	23.939	6.54	0.302	24.80	23M9D7W
		256QAM	1862.5 - 1902.5	23.801	6.75	0.188	22.74	23M8D7W
	30 MHz	π/2 BPSK	1865 - 1900	28.789	4.05	0.550	27.40	28M8G7W
		QPSK	1865 - 1900	28.785	5.53	0.526	27.21	28M8G7W
		16QAM	1865 - 1900	28.764	6.40	0.425	26.28	28M8D7W
		64QAM	1865 - 1900	28.766	6.62	0.326	25.14	28M8D7W
		256QAM	1865 - 1900	28.792	6.59	0.185	22.66	28M8D7W
	40 MHz	π/2 BPSK	1870 - 1895	38.771	3.99	0.550	27.40	38M8G7W
		QPSK	1870 - 1895	38.745	5.50	0.530	27.24	38M7G7W
		16QAM	1870 - 1895	38.651	6.29	0.437	26.40	38M7D7W
		64QAM	1870 - 1895	38.657	6.57	0.308	24.88	38M7D7W
		256QAM	1870 - 1895	38.594	6.72	0.190	22.79	38M6D7W

### EUT Overview

FCC ID: BCGA2757	element	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device			

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### 1.2 Element Washington DC LLC Test Location

These measurement tests were conducted at the Element Washington DC LLC facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

### 1.3 Test Facility / Accreditations

Measurements were performed at Element Washington DC LLC located in Morgan Hill, CA 95037, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 5 of 207	

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID:BCGA2757**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 24.

**Test Device Serial No.:** YG6YDYXRKQ, F32YWYM00Y

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (FR1), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8)

This device supports BT Beamforming

This device supports simultaneous transmission operations, which allows for multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

Antenna	Simultaneous Tx Config	WiFi 2.4GHz	Bluetooth	WiFi 5GHz	WCDMA / LTE / FR1 NR		
		802.11 b/g/n/ax	BDR, EDR, HDR4/8, LE1/2M	802.11 a/n/ac/ax	Mid Band	High Band	Ultra High Band
3a	Config 1	✗	✓	✓	✗	✗	✗
3a	Config 2	✓	✗	✗	✓	✗	✗
3a	Config 3	✓	✗	✗	✗	✓	✗
3a	Config 4	✗	✓	✓	✓	✗	✗
3a	Config 5	✗	✓	✓	✗	✓	✗
1b	Config 6	✗	✗	✓	✓	✗	✗
1b	Config 7	✗	✗	✓	✗	✓	✗
1a	Config 8	✓	✗	✗	✗	✗	✓
1a	Config 9	✗	✓	✗	✗	✗	✓

Table 2-1. Simultaneous Transmission Configurations

✓ = Support; ✗ = Not Support

**Note:**

All the above simultaneous transmission configurations have been tested and the worst case configuration was found to be Config 3 and is reported in RF WLAN and RF Part 27b test reports.

Wi-Fi 2.4GHz and Bluetooth 2.4 GHz can transmit simultaneously on separate antennas. Specific 2.4GHz Wi-Fi antenna that can only transmit simultaneously with 2.4 GHz Bluetooth antenna is listed in the SAR test report. For BT (2.4 GHz) in connected mode and Wi-Fi (2.4 GHz) – Wi-Fi max power will not exceed minimum of (13.5dBm, SAR max cap, Reg max cap) power. For BT (2.4 GHz) in disconnected mode and Wi-Fi (2.4 GHz) – BT will be using iPA only and Wi-Fi max power will not exceed minimum of (SAR max cap, Reg max cap) power.

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device			

## 2.3 Antenna Description

Following antenna gains provided by manufacturer were used for testing.

Band	Antenna Gain [dBi]			
	Antenna 4	Antenna 2b	Antenna 3a	Antenna 1b
WCDMA1900				
LTE Band 2/25	1.7	-2.0	0.1	-0.6
FR1 Band n2/25				

Table 2-2. Highest Antenna Gain

## 2.4 Test Support Equipment

Test Support Equipment				
1	Apple MacBook Pro w/AC/DC Adapter	Model: A2141 Model: A2166	S/N: C02DV7VKMD6T S/N: N/A	
2	Apple USB-C Cable	Model: Spartan	S/N: 000MKTR02U	
3	USB-C Cable w/ AC Adapter	Model: A246 Model: A2305	S/N: N/A S/N: N/A	
4	DC Power Supply	Model: KPS3010D	S/N: N/A	

Table 2-3. Test Support Equipment

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 7 of 207	

## 2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.26-2015, TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

## 2.6 Software and Firmware

The test was conducted with firmware version 20A32640u installed on the EUT.

## 2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device		Page 8 of 207

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI C63.26-2015/TIA-603-E-2016) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

**Deviation from Measurement Procedure.....**None

### 3.2 Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:

$$E_{\text{[dB}\mu\text{V/m]}} = \text{Measured amplitude level}_{\text{[dBm]}} + 107 + \text{Cable Loss}_{\text{[dB]}} + \text{Antenna Factor}_{\text{[dB/m]}}$$

And

$$\text{EIRP}_{\text{[dBm]}} = E_{\text{[dB}\mu\text{V/m]}} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014.

Per KDB 414788 D01 v01r01, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

Radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015 and TIA-603-E-2016.

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device		Page 9 of 207

## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.77
Radiated Disturbance (<30MHz)	4.38
Radiated Disturbance (30MHz-1GHz)	4.75
Radiated Disturbance (1-18GHz)	5.20
Radiated Disturbance (>18GHz)	4.72

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 10 of 207	

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	6/10/2022	Annual	6/10/2023	MY49430244
Agilent Technologies	N9020A	MXA Signal Analyzer	4/26/2022	Annual	4/26/2023	MY56470202
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	1/19/2022	Annual	1/19/2023	T058701-02
ETS-Lindgren	3142E	Biconilog Antenna (26-6000MHz)	10/21/2021	Annual	10/21/2022	208204
ETS-Lindgren	3117	Double Ridged Guide Horn Antenna (1-18GHz)	10/25/2021	Annual	10/25/2022	227597
ETS-Lindgren	SU-241	Table Top Temperature Chamber	10/6/2021	Annual	10/6/2022	92009574
Keysight Technology	N9040B	UXA Signal Analyzer	2/8/2022	Annual	2/8/2023	MY57212015
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz-6GHz)	1/6/2022	Annual	1/6/2023	102328
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	10/11/2021	Annual	10/11/2022	161616
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	11/4/2021	Annual	11/4/2022	151888
Rohde & Schwarz	ESW26	EMI Test Receiver	5/19/2022	Annual	5/19/2023	101299
Rohde & Schwarz	ESW44	EMI Test Receiver	12/2/2021	Annual	12/2/2022	101570
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	3/4/2022	Annual	3/4/2023	101619
Rohde & Schwarz	FSVA3044	Signal Analyzer (up to 44 GHz)	5/12/2022	Annual	5/12/2023	101098
Rohde & Schwarz	HFH2-ZZ	Loop Antenna	4/3/2022	Annual	4/3/2023	100546
Rohde & Schwarz	TC-TA18	Cross-Polarized Antenna 400MHz-18GHz	1/25/2022	Annual	1/25/2023	101063
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz-18GHz)	1/6/2022	Annual	1/6/2023	101639
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz-40GHz)	4/18/2022	Annual	4/18/2023	100050

**Table 5-1. Test Equipment**

**Notes:**

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 11 of 207	

## 6.0 SAMPLE CALCULATIONS

### Emission Designator

#### WCDMA Emission Designator

**Emission Designator = 4M16F9W**

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

#### $\pi/2$ BPSK / QPSK Modulation

**Emission Designator = 8M62G7W**

BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination of Any

#### QAM Modulation

**Emission Designator = 8M45D7W**

BW = 8.45 MHz

D = Amplitude/Angle Modulated

7 = Quantized/Digital Info

W = Combination of Any

### Spurious Radiated Emission

#### **Example: Spurious emission at 3700.40 MHz**

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was  $-81.0$  dBm. The gain of the substituted antenna is  $8.1$  dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0$  dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is  $2.0$  dB at  $3700.40$  MHz. So  $6.1$  dB is added to the signal generator reading of  $-30.9$  dBm yielding  $-24.80$  dBm. The fundamental EIRP was  $25.50$  dBm so this harmonic was  $25.50$  dBm  $- (-24.80) = 50.3$  dBc.

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device		Page 12 of 207

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: Apple Inc.  
 FCC ID: BCGA2757  
 FCC Classification: PCS Licensed Transmitter (PCB)  
 Mode(s): WCDMA/LTE/NR

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Occupied Bandwidth	2.1049	N/A	<span style="background-color: #e0f2ff; border: 1px solid #4682b4; padding: 2px 5px; border-radius: 5px;">N/A</span>	Section 7.2
	Conducted Band Edge / Spurious Emissions	2.1051, 24.238(a)	-13 dBm at Band Edge and for all out-of-band emissions	<span style="background-color: #e0f2ff; border: 1px solid #4682b4; padding: 2px 5px; border-radius: 5px;">PASS</span>	Sections 7.3, 7.4
	Peak-Average Ratio	24.232(d)	< 13 dB	<span style="background-color: #e0f2ff; border: 1px solid #4682b4; padding: 2px 5px; border-radius: 5px;">PASS</span>	Section 7.5
	Transmitter Conducted Output Power	2.1046	N/A	<span style="background-color: #e0f2ff; border: 1px solid #4682b4; padding: 2px 5px; border-radius: 5px;">N/A</span>	See RF Exposure Report
	Frequency Stability	2.1055, 24.235	Fundamental emissions stay within authorized frequency block over the temperature and voltage range as tested	<span style="background-color: #e0f2ff; border: 1px solid #4682b4; padding: 2px 5px; border-radius: 5px;">PASS</span>	Section 7.8
	Effective Radiated Power / Equivalent Isotropic Radiated Power	24.232(c)	< 2 Watts max. EIRP	<span style="background-color: #e0f2ff; border: 1px solid #4682b4; padding: 2px 5px; border-radius: 5px;">PASS</span>	Section 7.6
RADIATED	Radiated Spurious Emissions	2.1053, 24.238(a)	-13 dBm for all out-of-band emissions	<span style="background-color: #e0f2ff; border: 1px solid #4682b4; padding: 2px 5px; border-radius: 5px;">PASS</span>	Section 7.7

**Table 7-1. Summary of Test Results**

**Notes:**

1. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
2. The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
3. All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
4. All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is Element EMC Software Tool v1.1.

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 13 of 207	

## 7.2 Occupied Bandwidth

§2.1049

### Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section. All ports were tested and only the worst case data were reported.

### Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

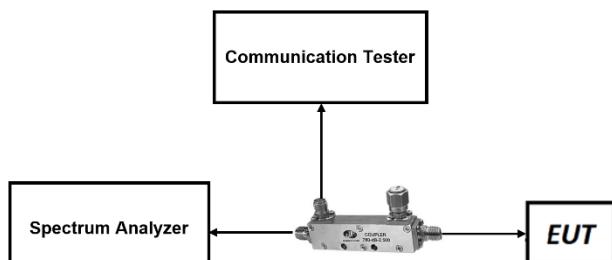


Figure 7-1. Test Instrument & Measurement Setup

### Test Notes


None.

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 14 of 207	

## LTE Band 25/2



Plot 7-1. Occupied Bandwidth Plot (LTE Band 25/2 - 1.4MHz QPSK - Full RB Configuration)

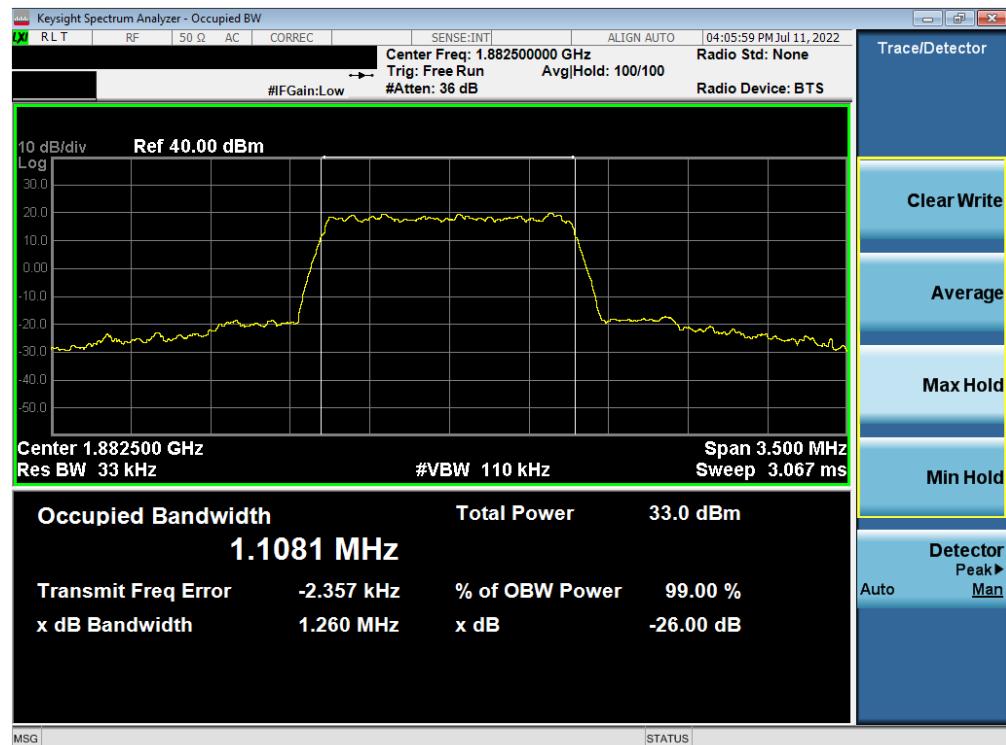


Plot 7-2. Occupied Bandwidth Plot (LTE Band 25/2 - 1.4MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 15 of 207	



Plot 7-3. Occupied Bandwidth Plot (LTE Band 25/2 - 1.4MHz 64-QAM - Full RB Configuration)

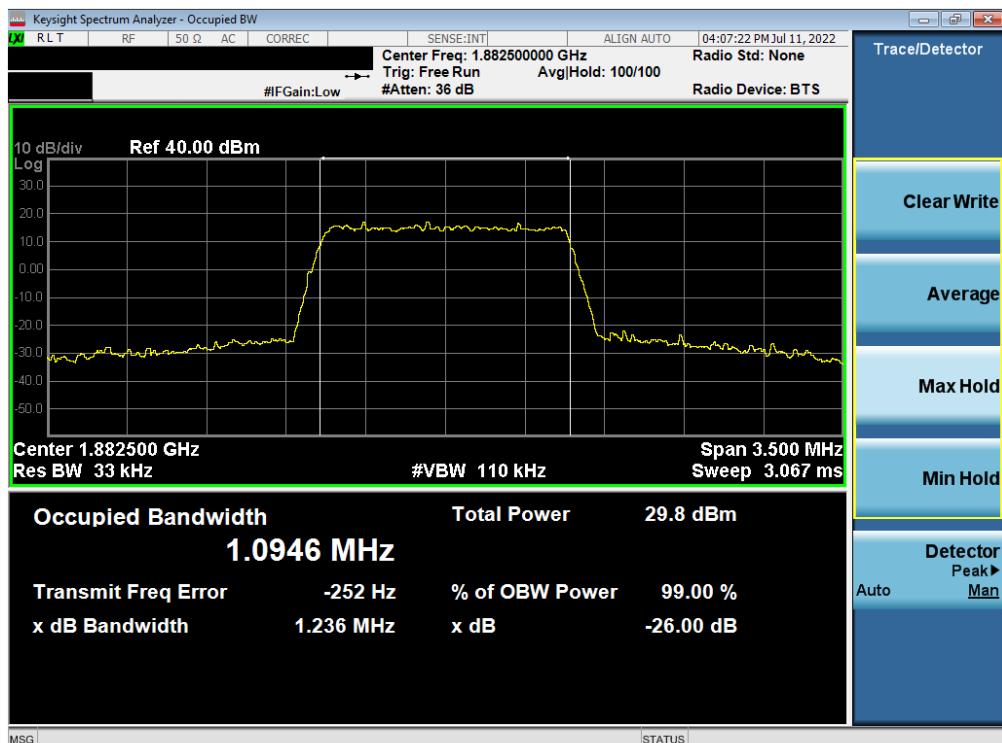

Plot 7-4. Occupied Bandwidth Plot (LTE Band 25/2 - 1.4MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 16 of 207	




Plot 7-5. Occupied Bandwidth Plot (LTE Band 25/2 - 3MHz QPSK - Full RB Configuration)




Plot 7-6. Occupied Bandwidth Plot (LTE Band 25/2 - 3MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 17 of 207	

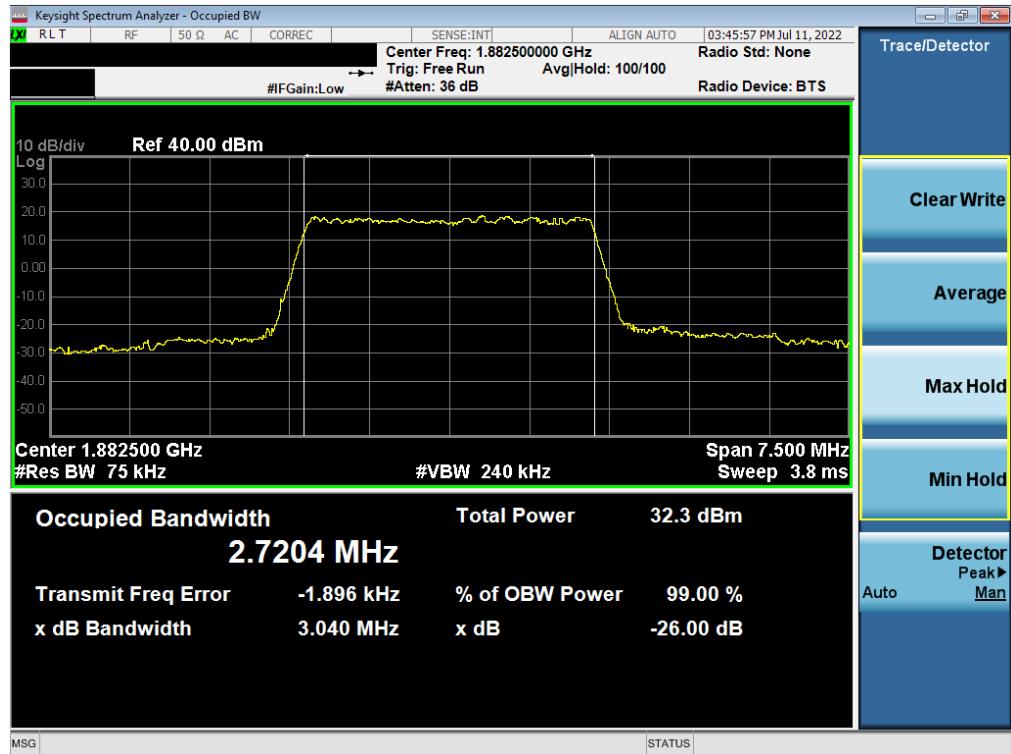

Plot 7-7. Occupied Bandwidth Plot (LTE Band 25/2 - 3MHz 64-QAM - Full RB Configuration)

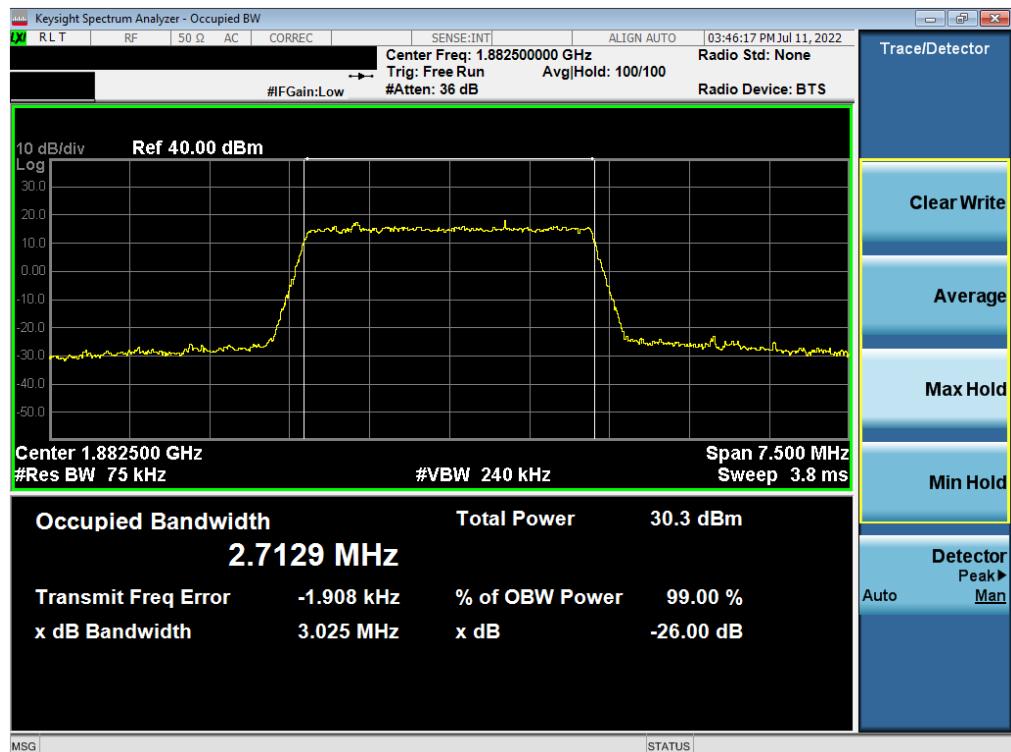


Plot 7-8. Occupied Bandwidth Plot (LTE Band 25/2 - 3MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 18 of 207	




Plot 7-9. Occupied Bandwidth Plot (LTE Band 25/2 - 5MHz QPSK - Full RB Configuration)

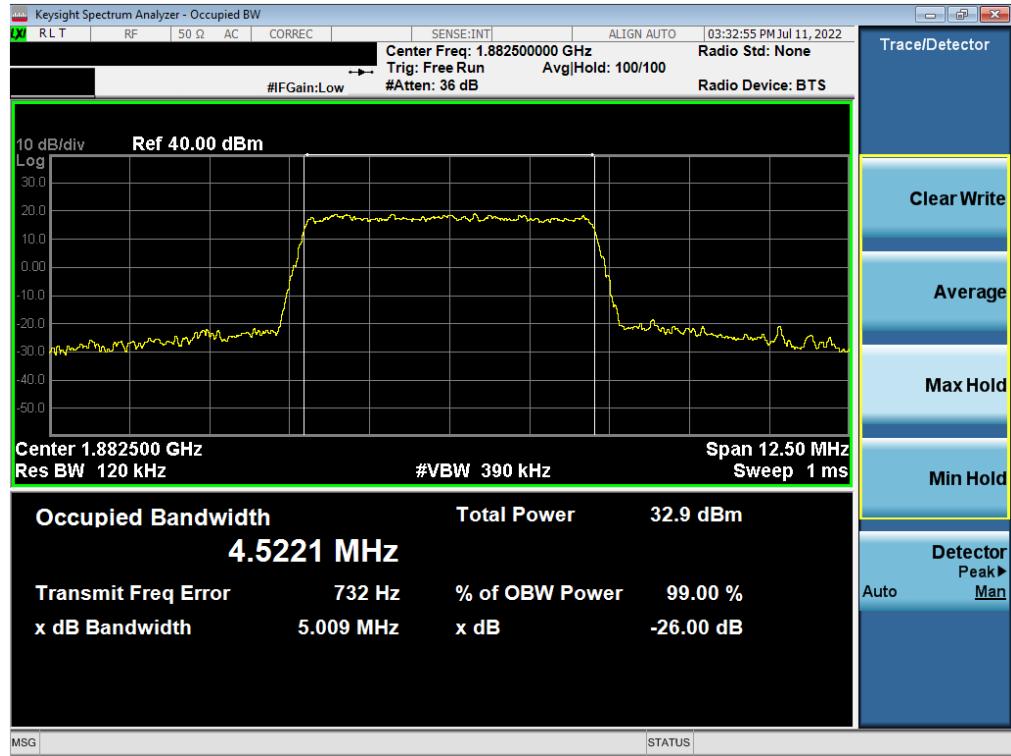


Plot 7-10. Occupied Bandwidth Plot (LTE Band 25/2 - 5MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 19 of 207	

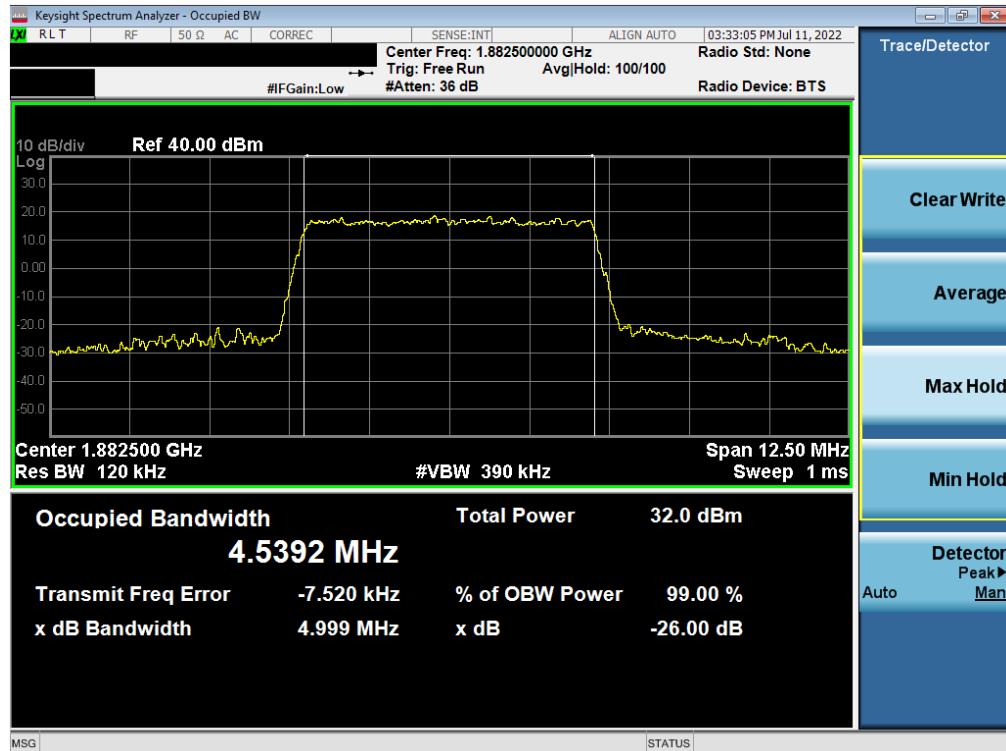


Plot 7-11. Occupied Bandwidth Plot (LTE Band 25/2 - 5MHz 64-QAM - Full RB Configuration)

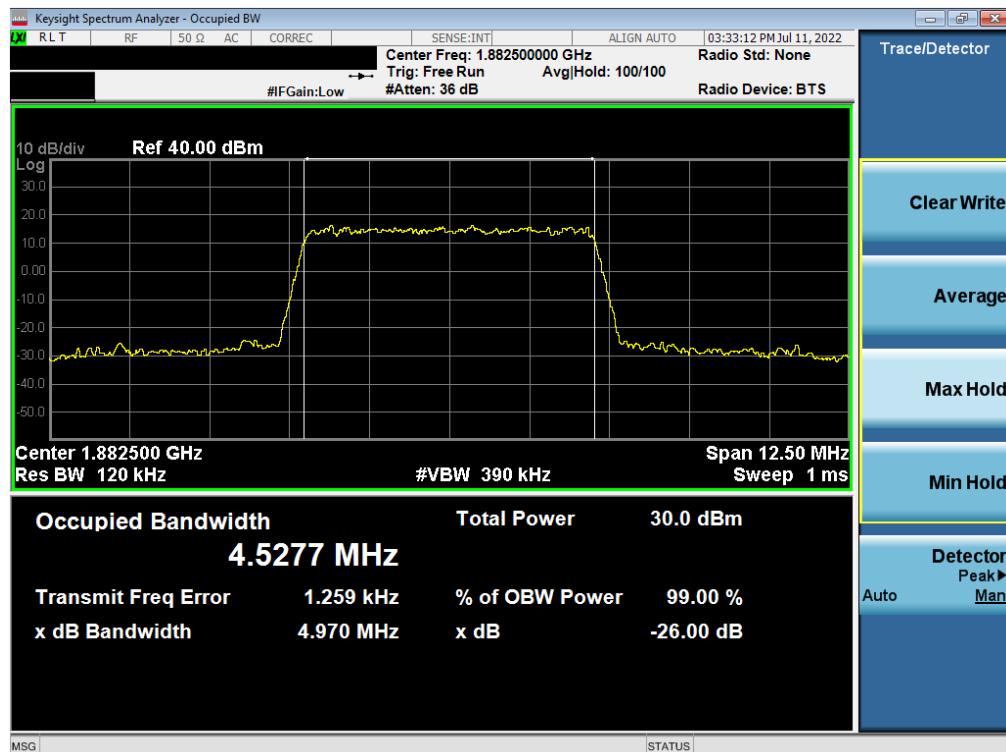

Plot 7-12. Occupied Bandwidth Plot (LTE Band 25/2 - 5MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 20 of 207	

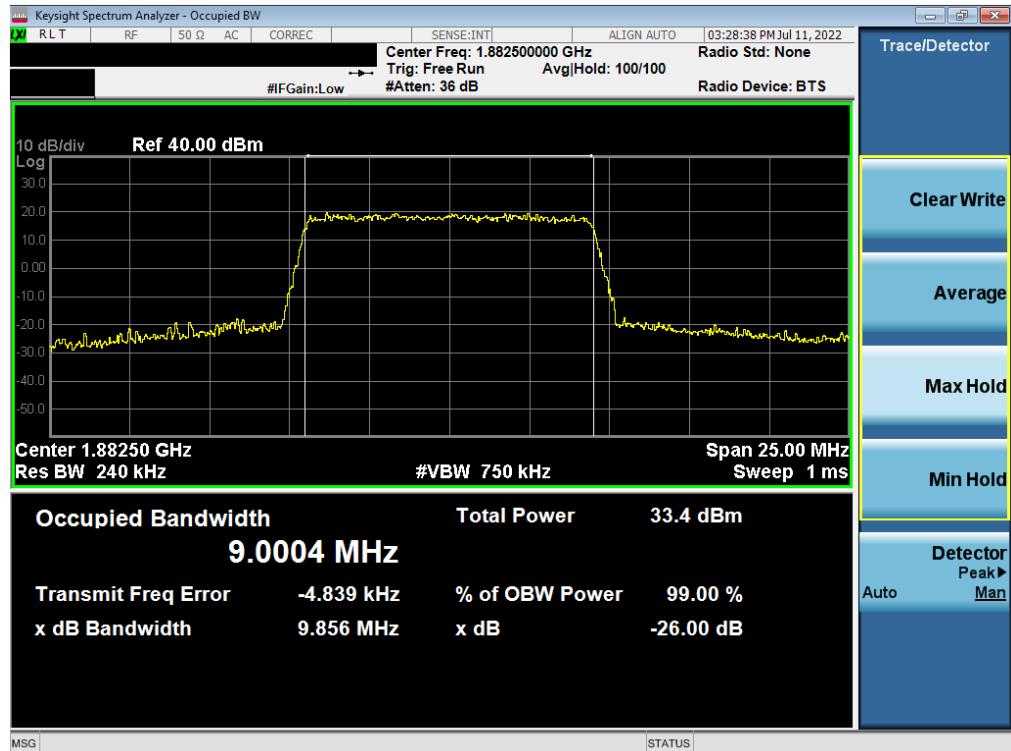

Plot 7-13. Occupied Bandwidth Plot (LTE Band 25/2 - 10MHz QPSK - Full RB Configuration)




Plot 7-14. Occupied Bandwidth Plot (LTE Band 25/2 - 10MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 21 of 207	



Plot 7-15. Occupied Bandwidth Plot (LTE Band 25/2 - 10MHz 64-QAM - Full RB Configuration)

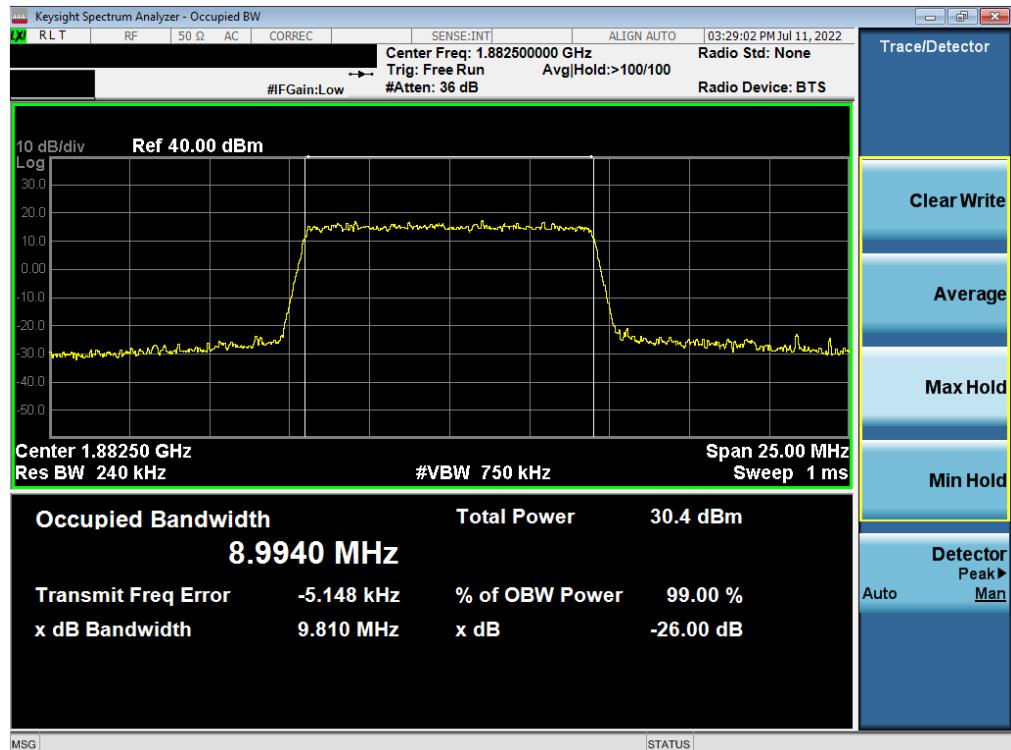

Plot 7-16. Occupied Bandwidth Plot (LTE Band 25/2 - 10MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 22 of 207	



Plot 7-17. Occupied Bandwidth Plot (LTE Band 25/2 - 15MHz QPSK - Full RB Configuration)




Plot 7-18. Occupied Bandwidth Plot (LTE Band 25/2 - 15MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 23 of 207	



Plot 7-19. Occupied Bandwidth Plot (LTE Band 25/2 - 15MHz 64-QAM - Full RB Configuration)

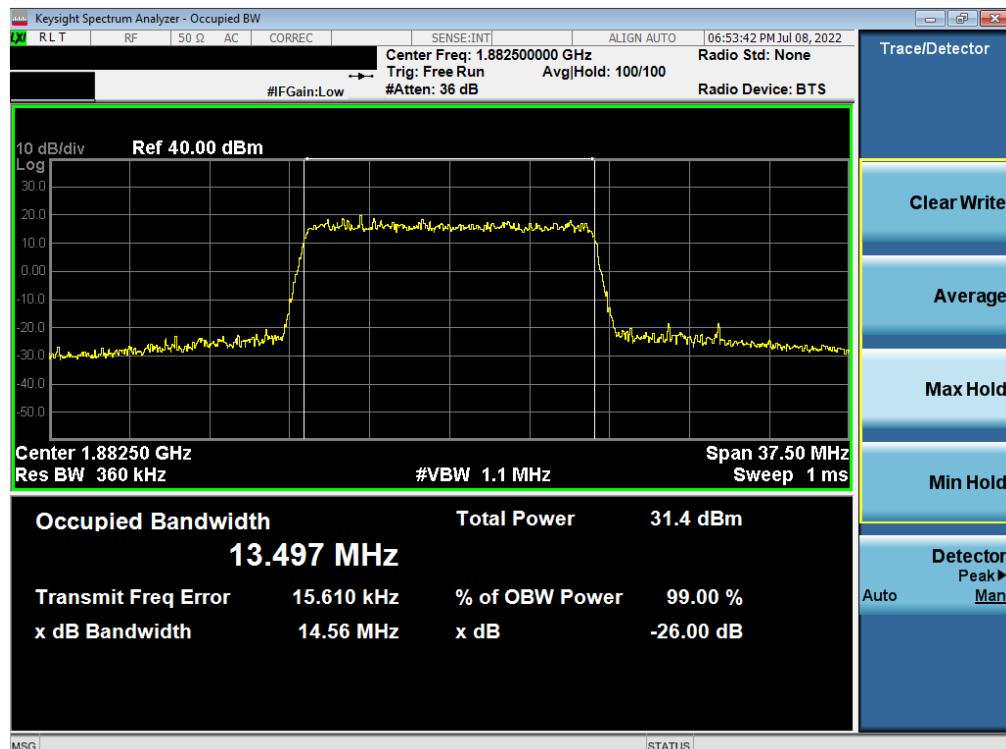


Plot 7-20. Occupied Bandwidth Plot (LTE Band 25/2 - 15MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 24 of 207	




Plot 7-21. Occupied Bandwidth Plot (LTE Band 25/2 - 20MHz QPSK - Full RB Configuration)

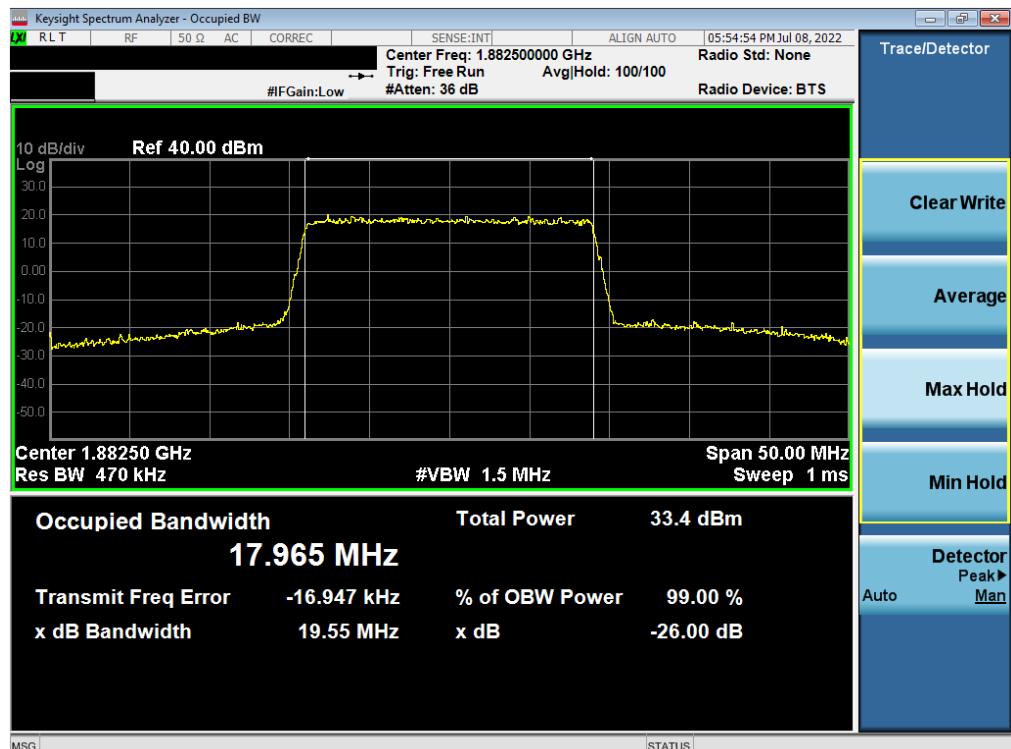


Plot 7-22. Occupied Bandwidth Plot (LTE Band 25/2 - 20MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 25 of 207	

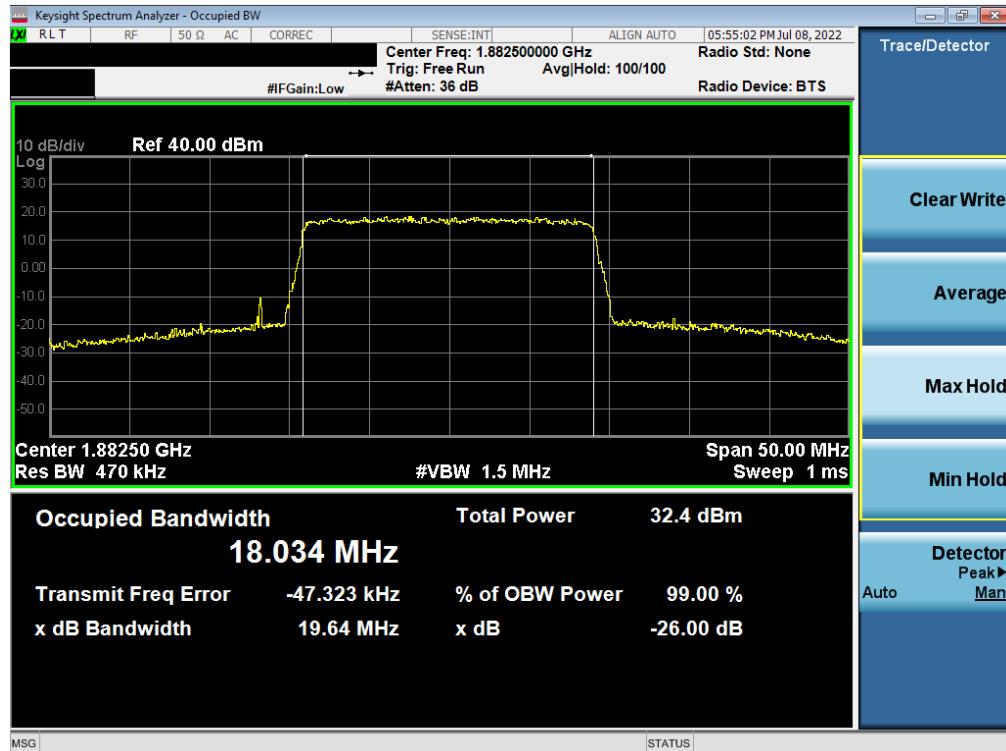


Plot 7-23. Occupied Bandwidth Plot (LTE Band 25/2 - 20MHz 64-QAM - Full RB Configuration)

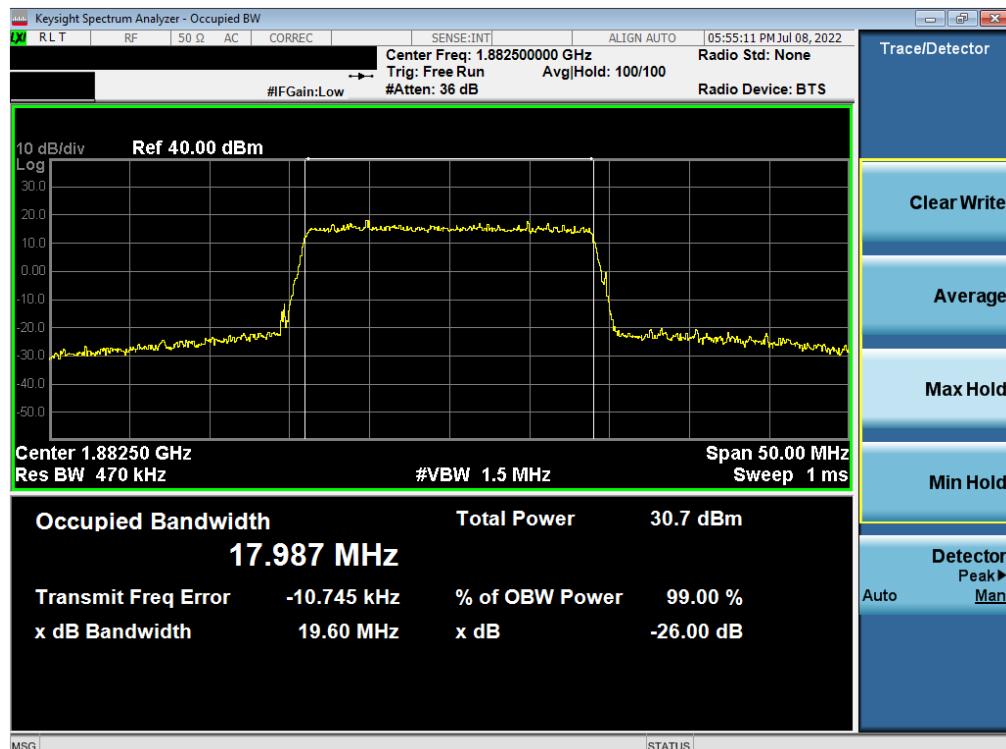

Plot 7-24. Occupied Bandwidth Plot (LTE Band 25/2 - 20MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 26 of 207	

## NR Band n25/n2

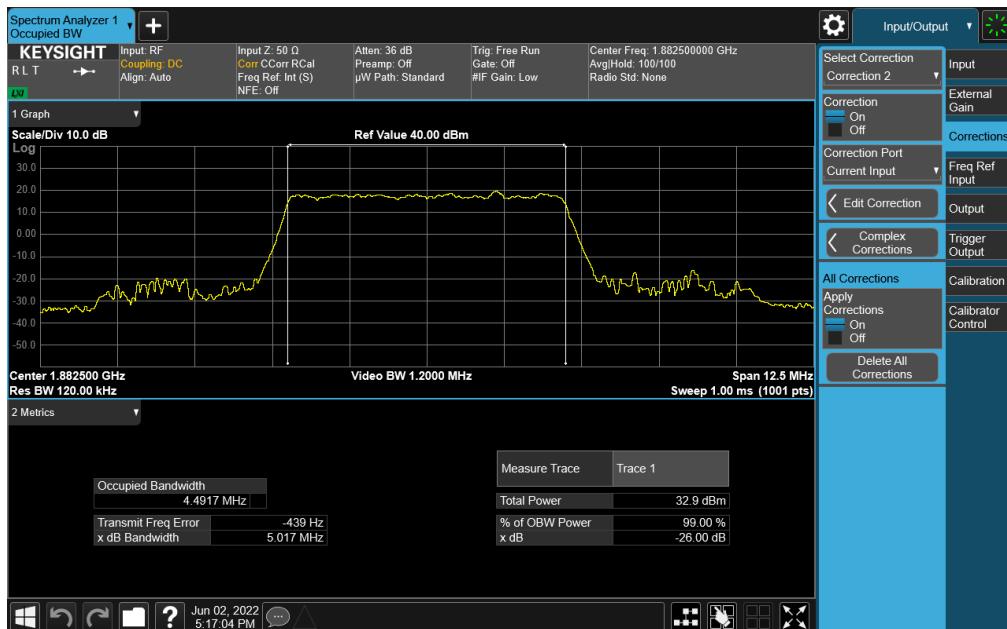

Plot 7-25. Occupied Bandwidth Plot (NR Band n25/n2 - 5.0MHz DFT-s-OFDM  $\pi/2$  BPSK - Full RB)




Plot 7-26. Occupied Bandwidth Plot (NR Band n25/n2 - 5.0MHz CP-OFDM QPSK - Full RB)

FCC ID: BCGA2757	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 27 of 207




Plot 7-27. Occupied Bandwidth Plot (NR Band n25/n2 - 5.0MHz CP-OFDM 16QAM - Full RB)

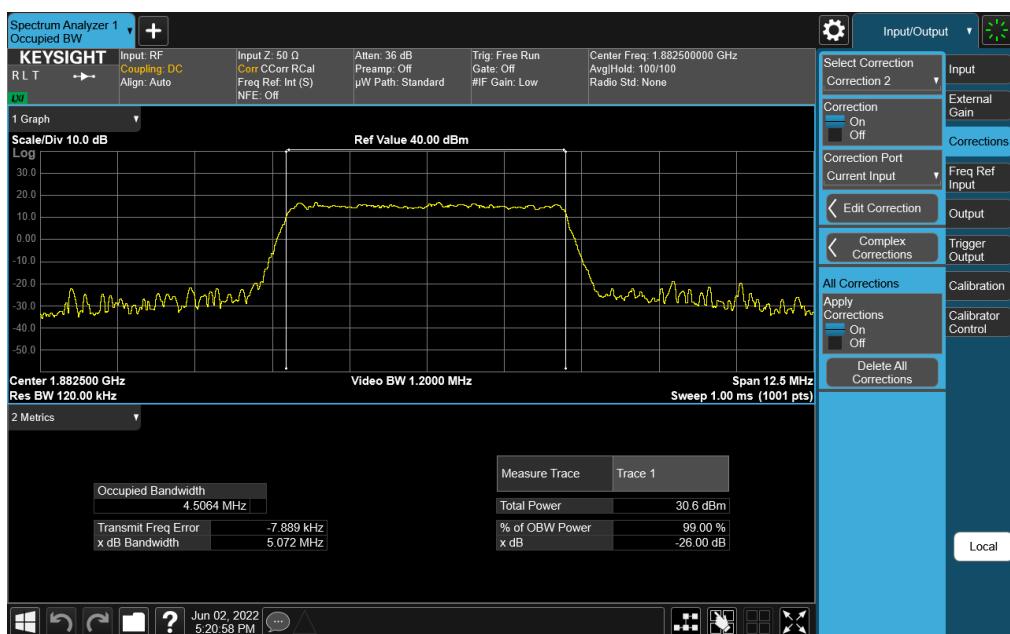


Plot 7-28. Occupied Bandwidth Plot (NR Band n25/n2 - 5.0MHz CP-OFDM 64QAM - Full RB)

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 28 of 207	

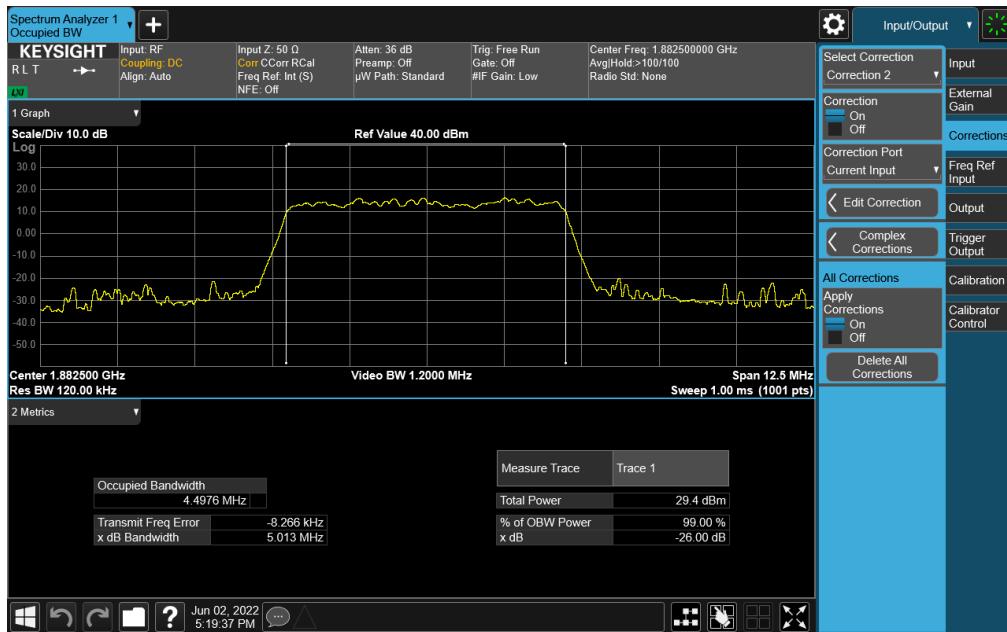


Plot 7-29. Occupied Bandwidth Plot (NR Band n25/n2 - 5.0MHz CP-OFDM 256QAM - Full RB)

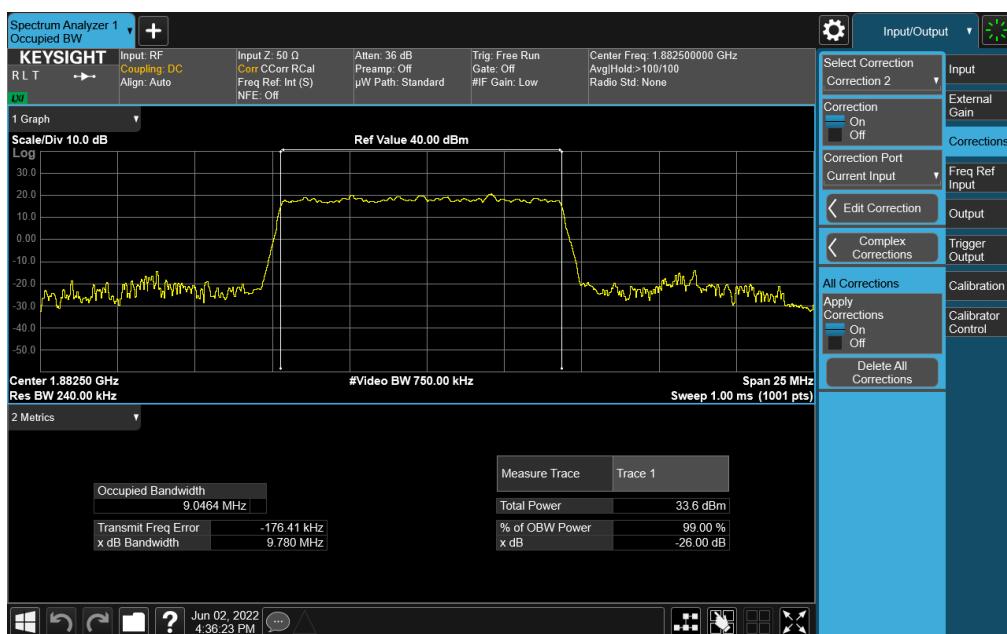


Plot 7-30. Occupied Bandwidth Plot (NR Band n25/n2 - 10.0MHz DFT-s-OFDM π/2 BPSK - Full RB)

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 29 of 207	

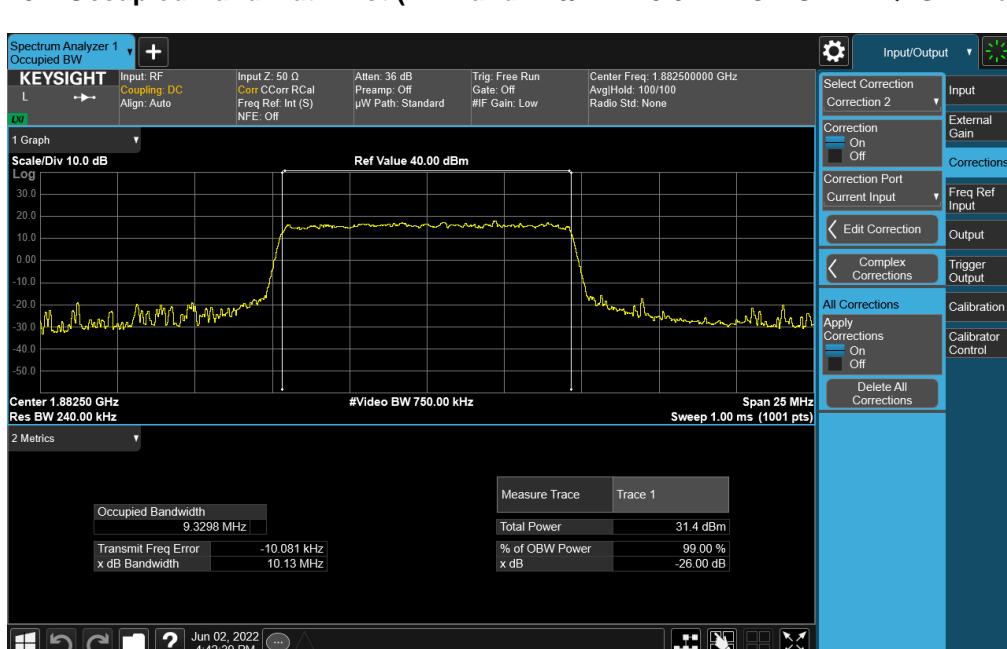

FCC ID: BCGA2757	element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 30 of 207	

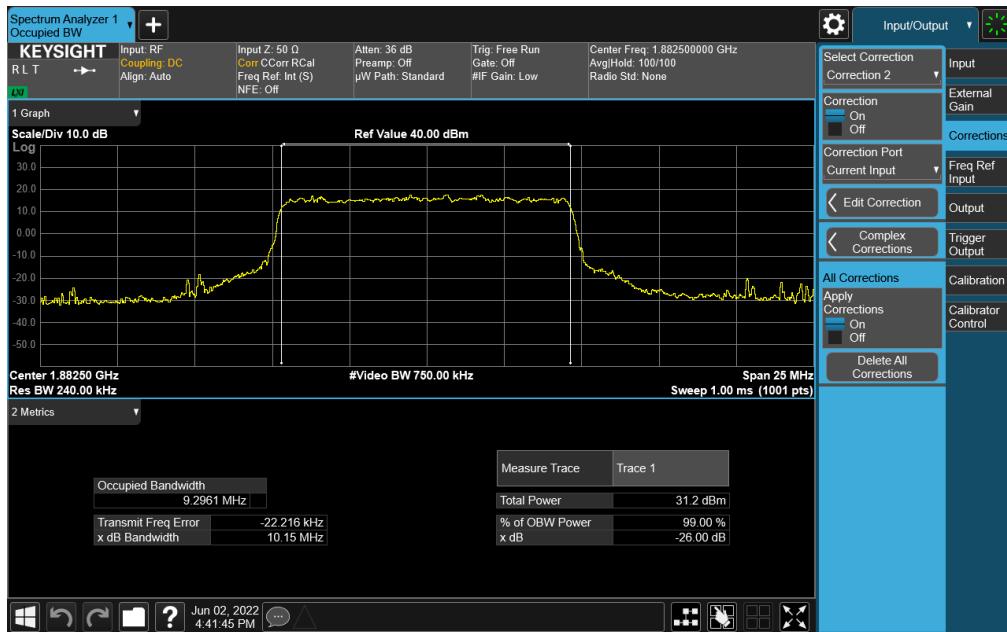

Plot 7-33. Occupied Bandwidth Plot (NR Band n25/n2 - 10.0MHz CP-OFDM 64QAM - Full RB)



Plot 7-34. Occupied Bandwidth Plot (NR Band n25/n2 - 10.0MHz CP-OFDM 256QAM - Full RB)

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 31 of 207	




Plot 7-35. Occupied Bandwidth Plot (NR Band n25/n2 - 15.0MHz DFT-s-OFDM π/2 BPSK - Full RB)



Plot 7-36. Occupied Bandwidth Plot (NR Band n25/n2 - 15.0MHz CP-OFDM QPSK - Full RB)

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 32 of 207	

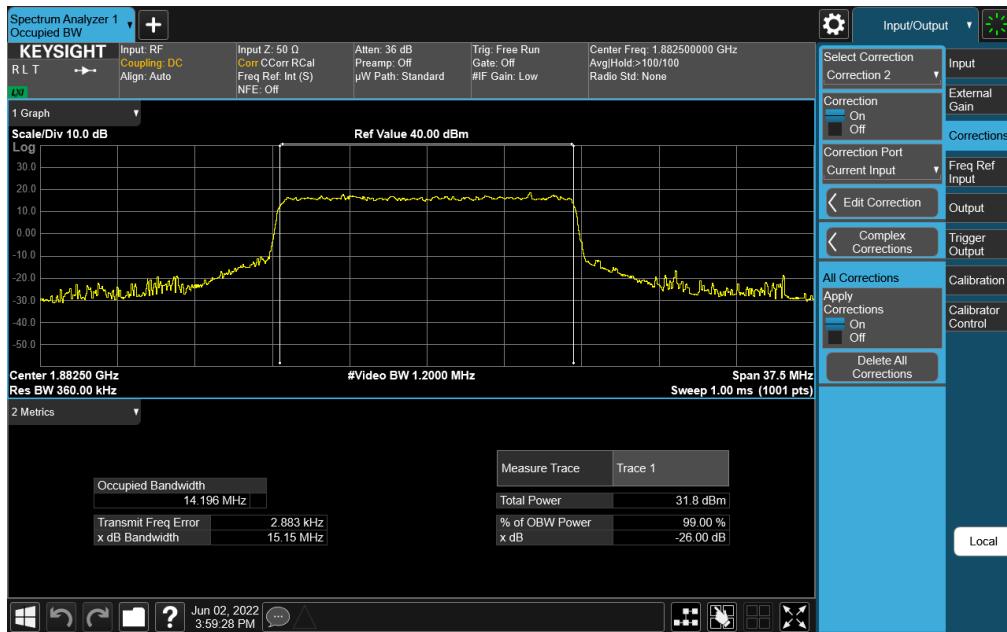

Plot 7-37. Occupied Bandwidth Plot (NR Band n25/n2 - 15.0MHz CP-OFDM 16QAM - Full RB)




Plot 7-38. Occupied Bandwidth Plot (NR Band n25/n2 - 15.0MHz CP-OFDM 64QAM - Full RB)

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 33 of 207	




Plot 7-39. Occupied Bandwidth Plot (NR Band n25/n2 - 15.0MHz CP-OFDM 256QAM - Full RB)

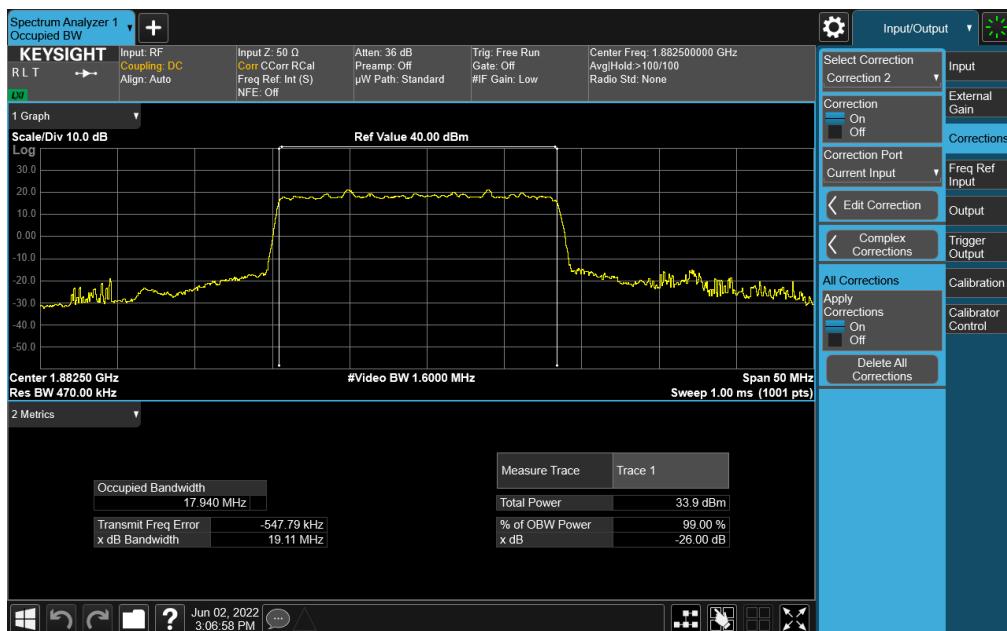


Plot 7-40. Occupied Bandwidth Plot (NR Band n25/n2 - 20.0MHz DFT-s-OFDM π/2 BPSK - Full RB)

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 34 of 207	


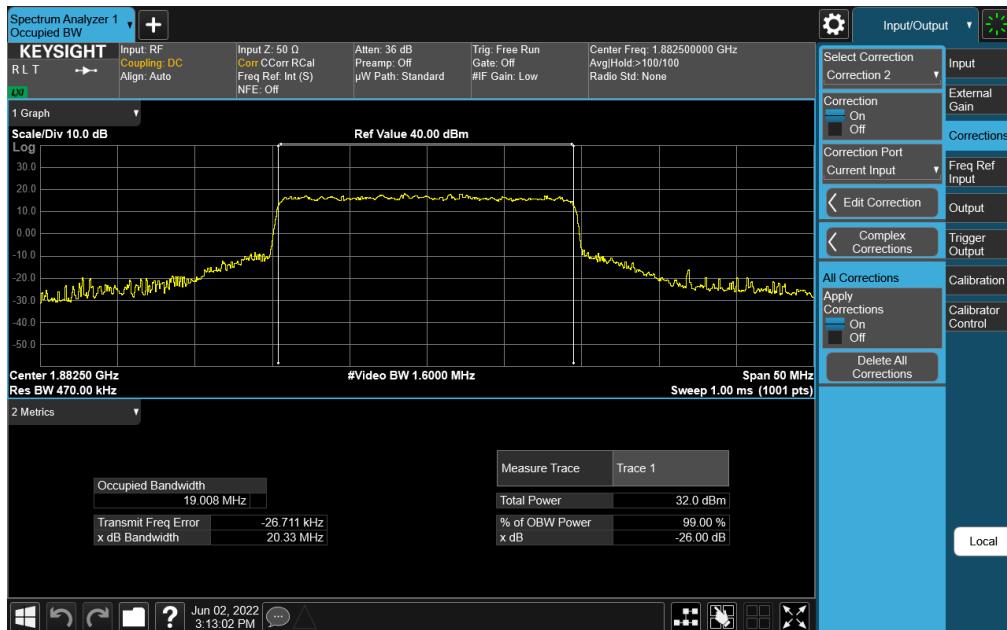


Plot 7-41. Occupied Bandwidth Plot (NR Band n25/n2 - 20.0MHz CP-OFDM QPSK - Full RB)


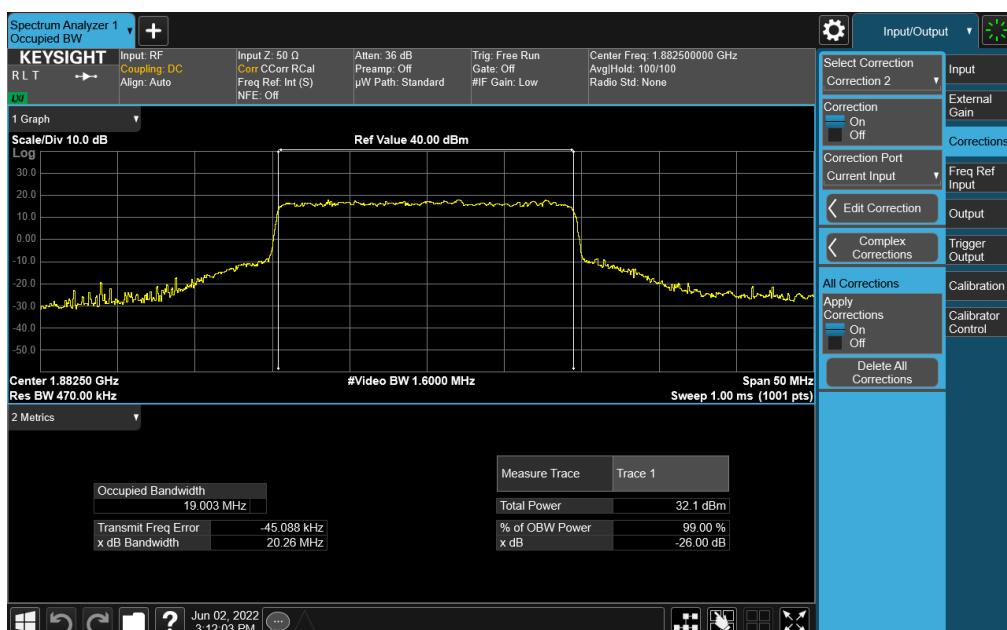


Plot 7-42. Occupied Bandwidth Plot (NR Band n25/n2 - 20.0MHz CP-OFDM 16QAM - Full RB)


FCC ID: BCGA2757	element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 35 of 207	

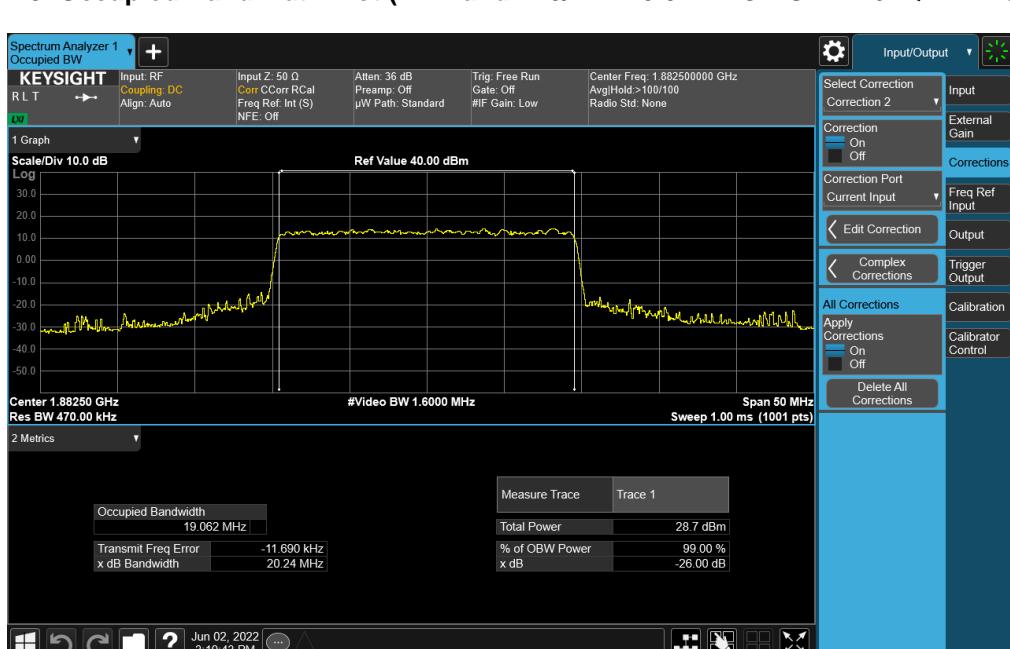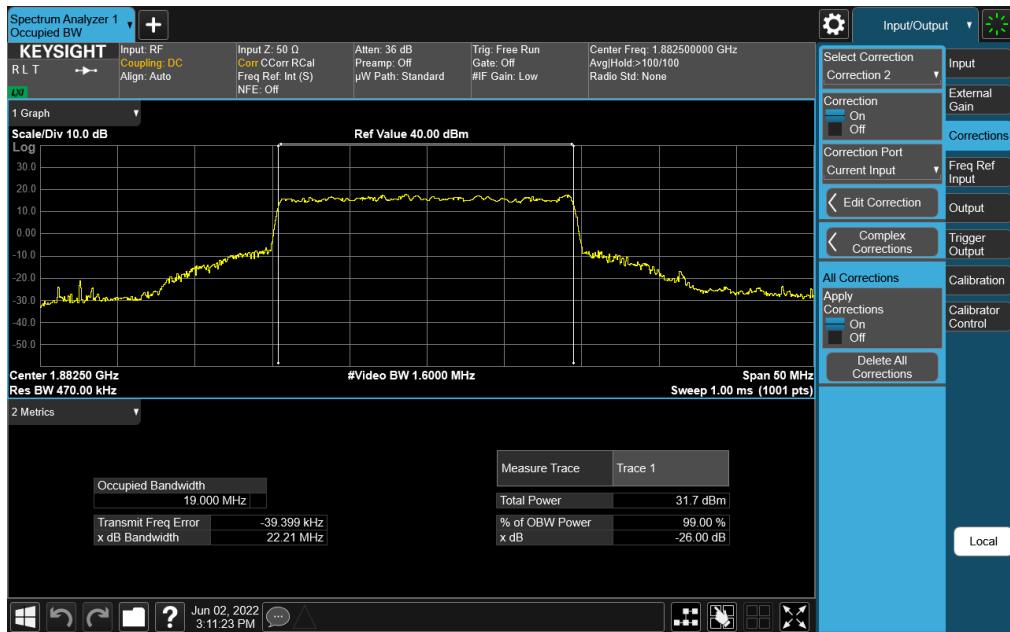


FCC ID: BCGA2757	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 36 of 207

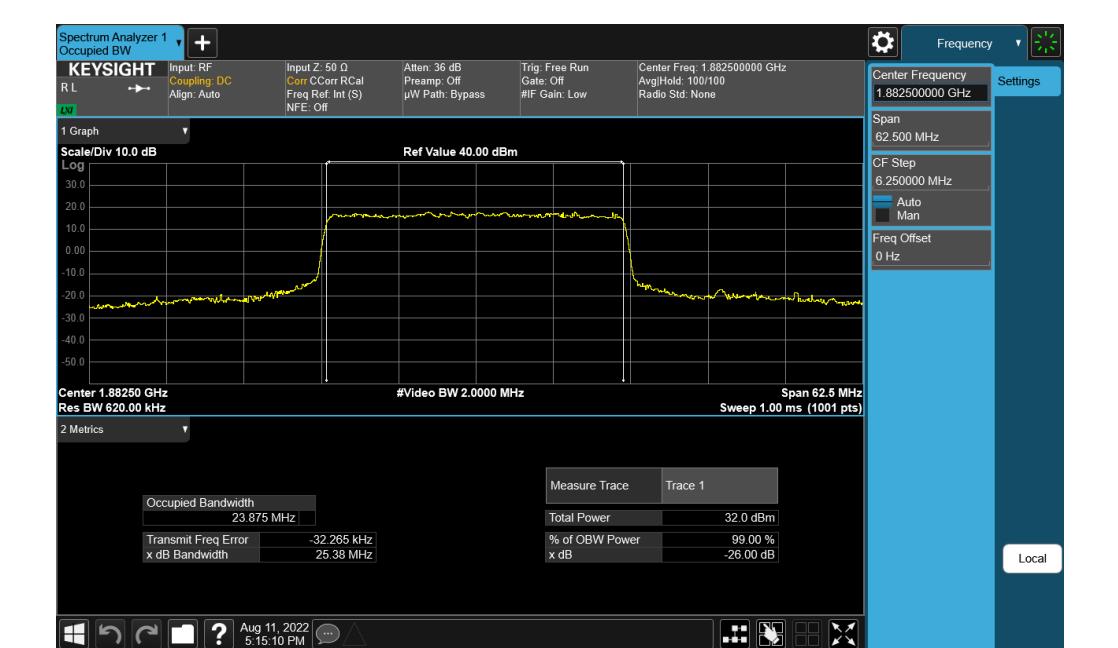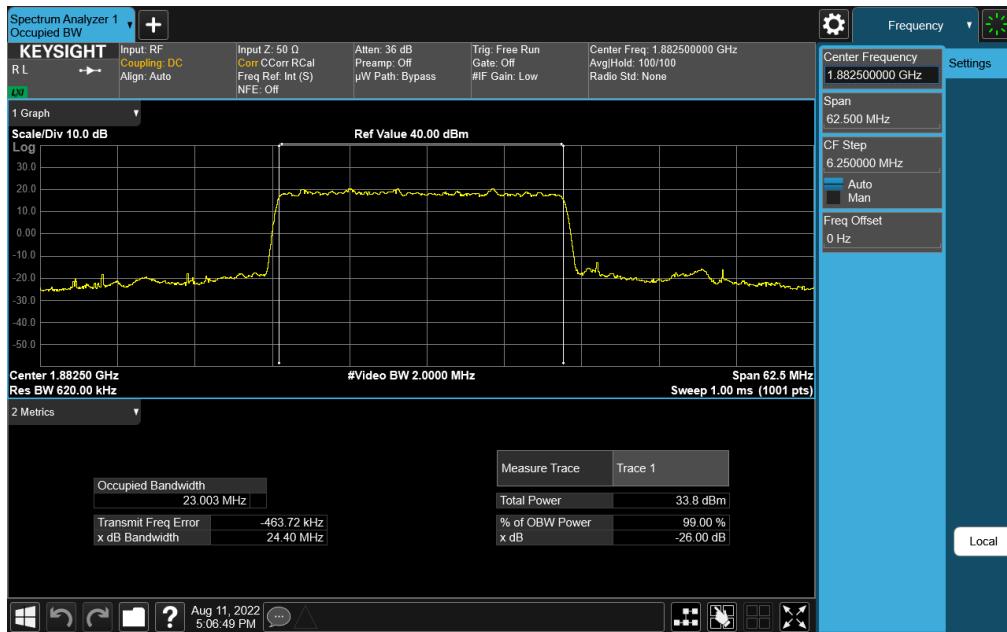


FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 37 of 207	

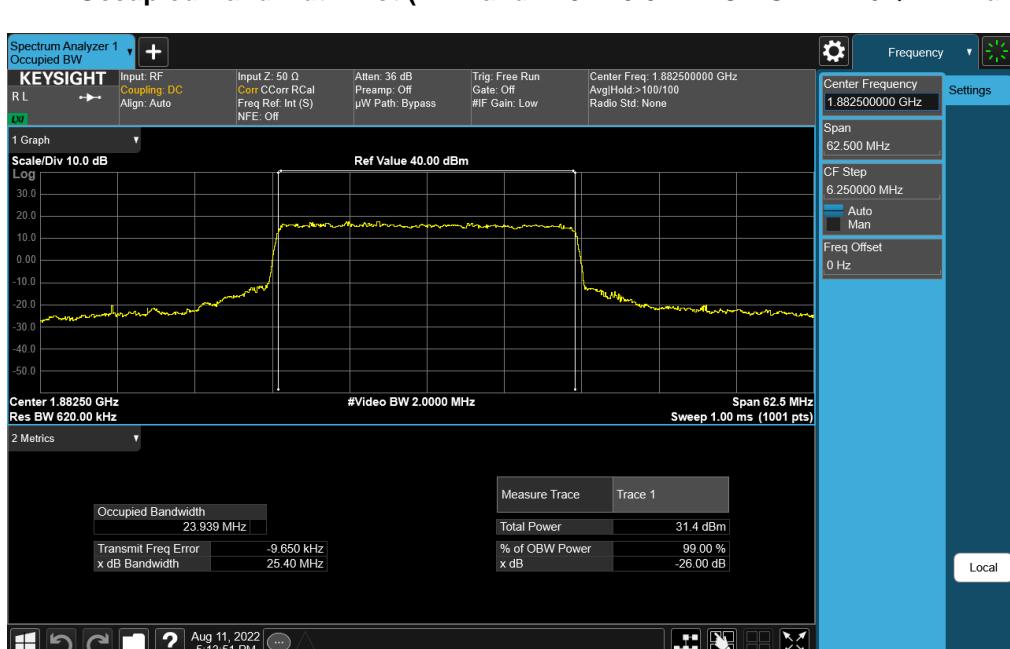

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 38 of 207	

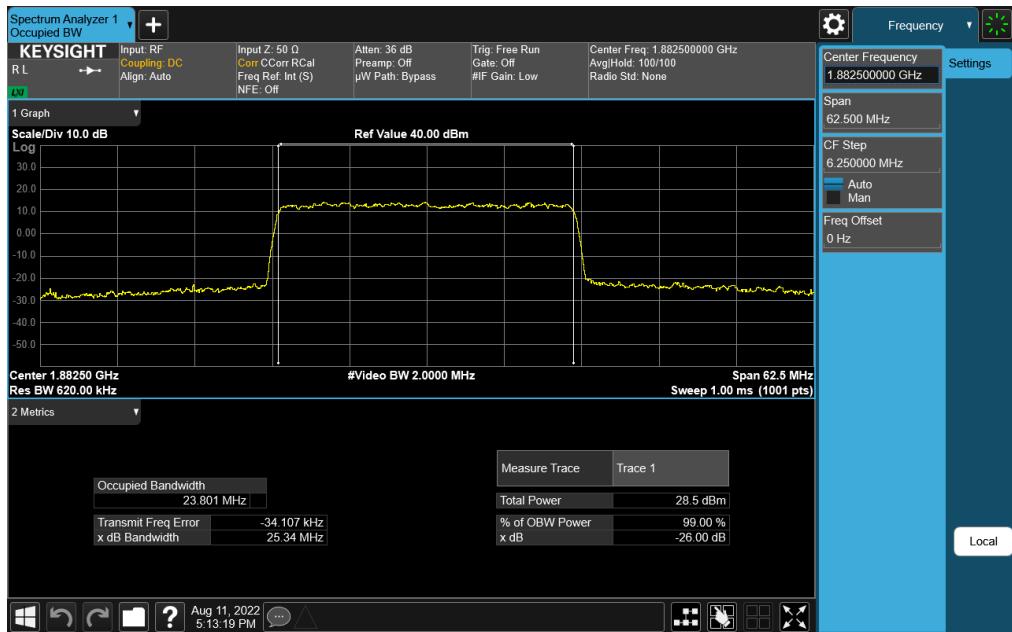


Plot 7-49. Occupied Bandwidth Plot (NR Band n25 - 25.0MHz CP-OFDM 256QAM - Full RB)

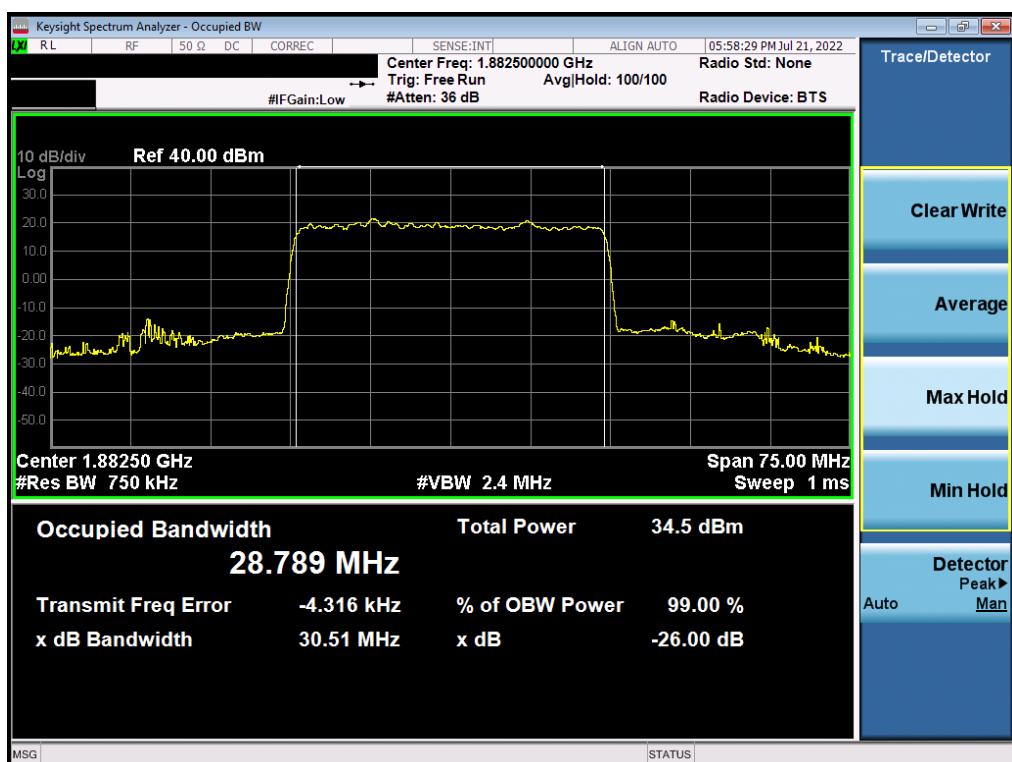


Plot 7-50. Occupied Bandwidth Plot (NR Band n25 - 30.0MHz DFT-s-OFDM π/2 BPSK - Full RB)

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 39 of 207	

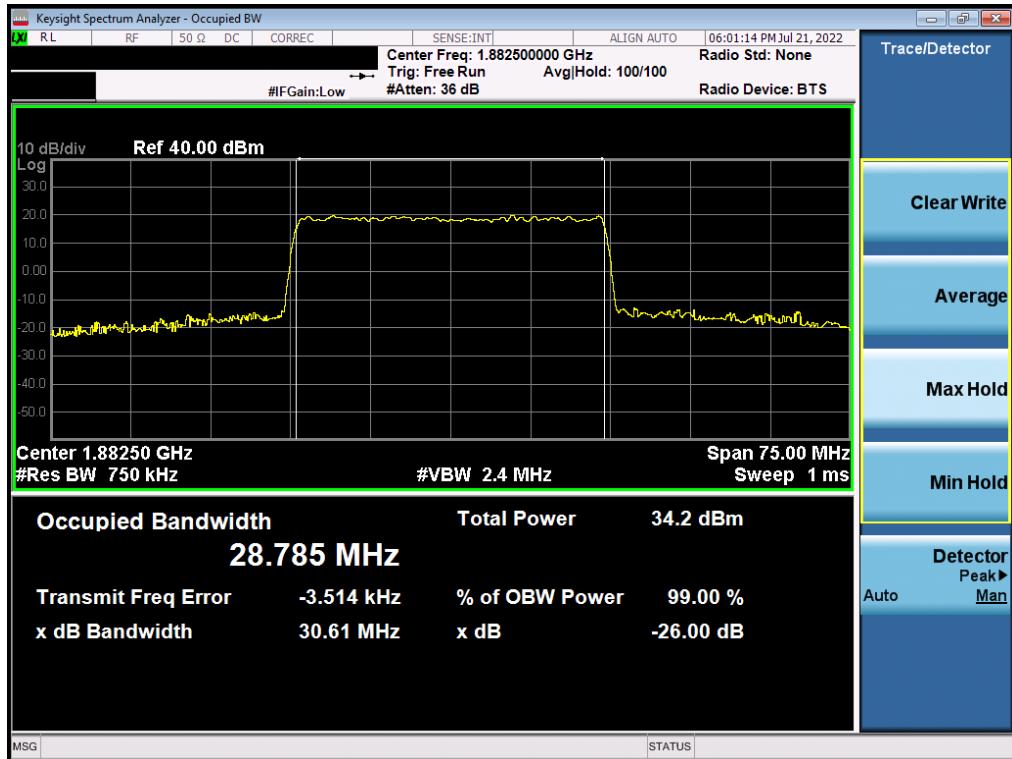


Plot 7-51. Occupied Bandwidth Plot (NR Band n25 - 30.0MHz CP-OFDM QPSK - Full RB)

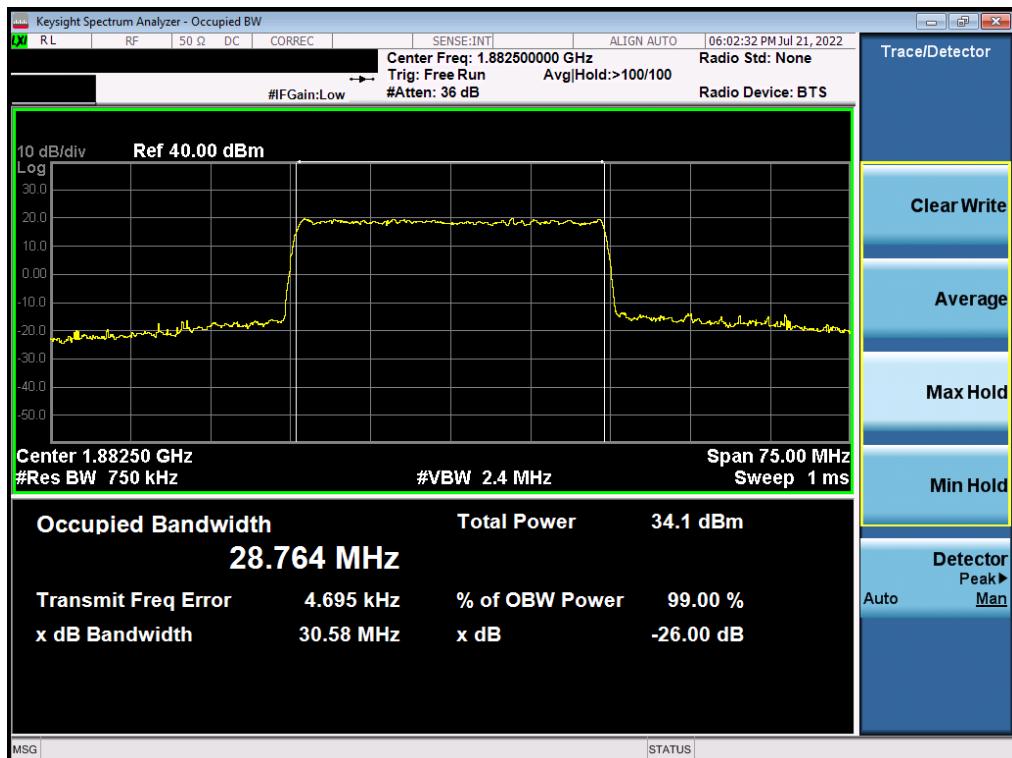


Plot 7-52. Occupied Bandwidth Plot (NR Band n25 - 30.0MHz CP-OFDM 16QAM - Full RB)

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 40 of 207	

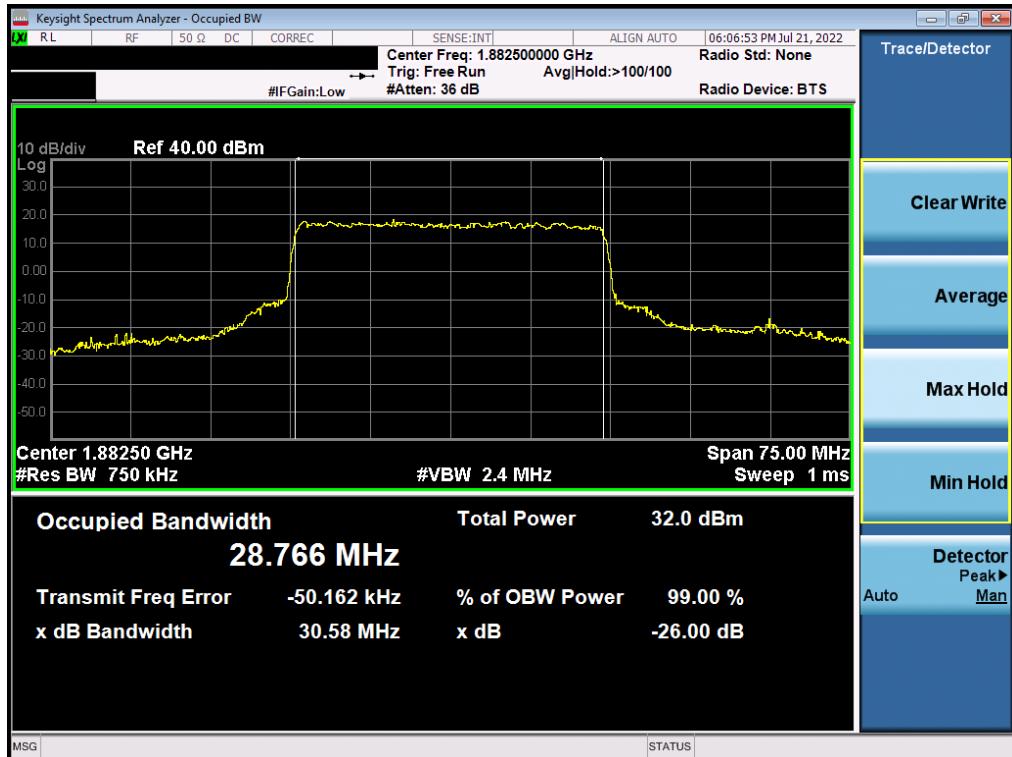


Plot 7-53. Occupied Bandwidth Plot (NR Band n25 - 30.0MHz CP-OFDM 64QAM - Full RB)

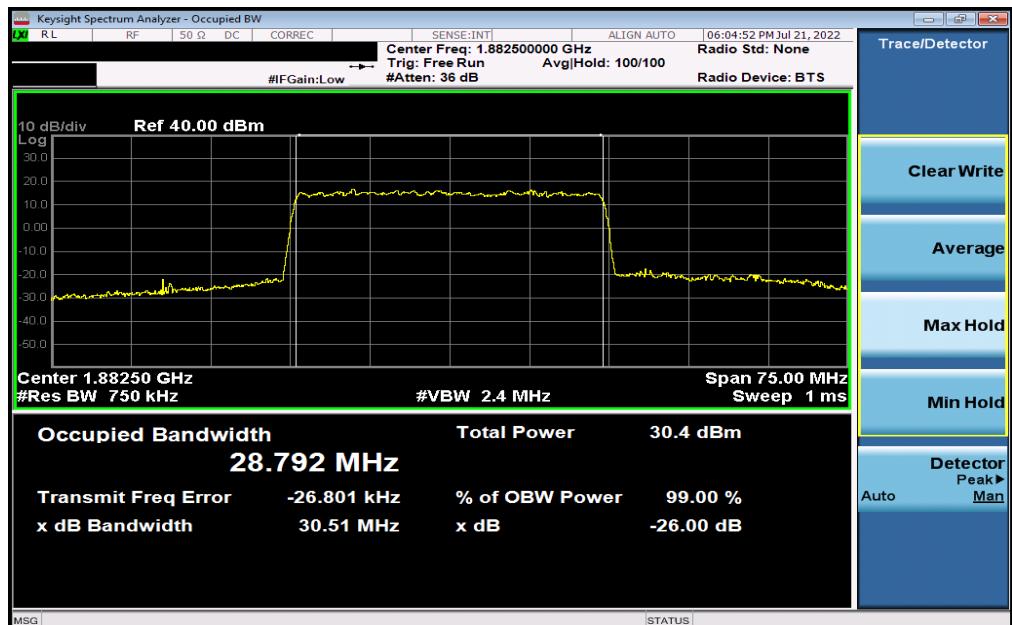

Plot 7-54. Occupied Bandwidth Plot (NR Band n25 - 30.0MHz CP-OFDM 256QAM - Full RB)

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 41 of 207	

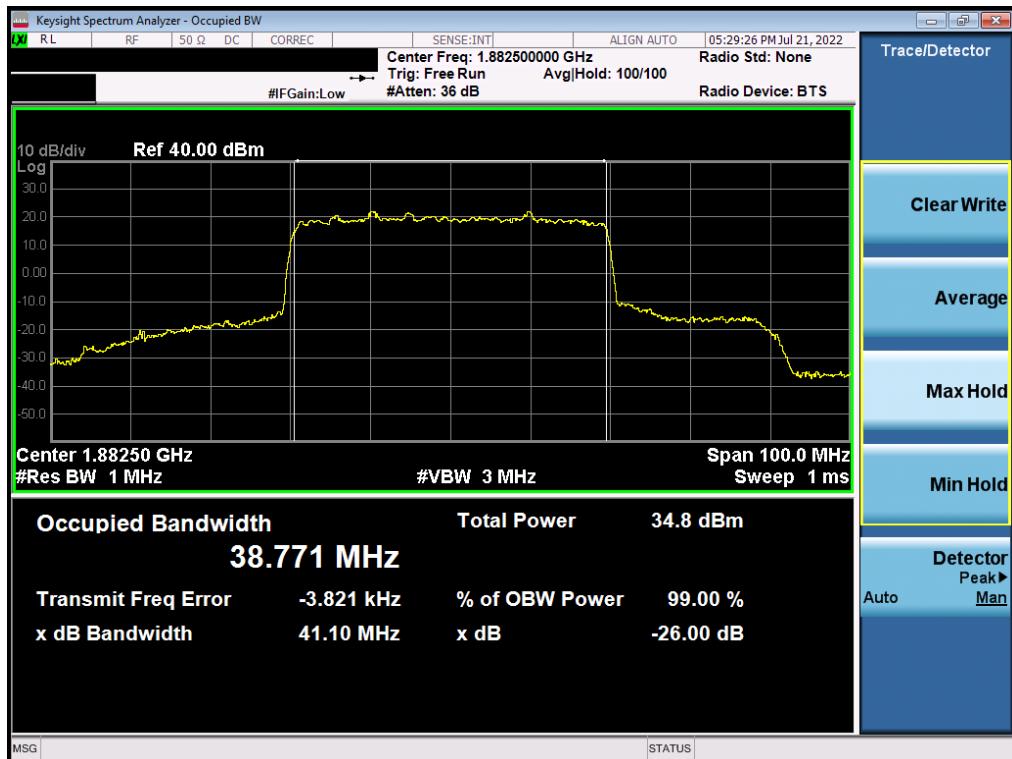


Plot 7-55. Occupied Bandwidth Plot (NR Band n25 - 40.0MHz DFT-s-OFDM  $\pi/2$  BPSK - Full RB)




Plot 7-56. Occupied Bandwidth Plot (NR Band n25 - 40.0MHz CP-OFDM QPSK - Full RB)

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 42 of 207	

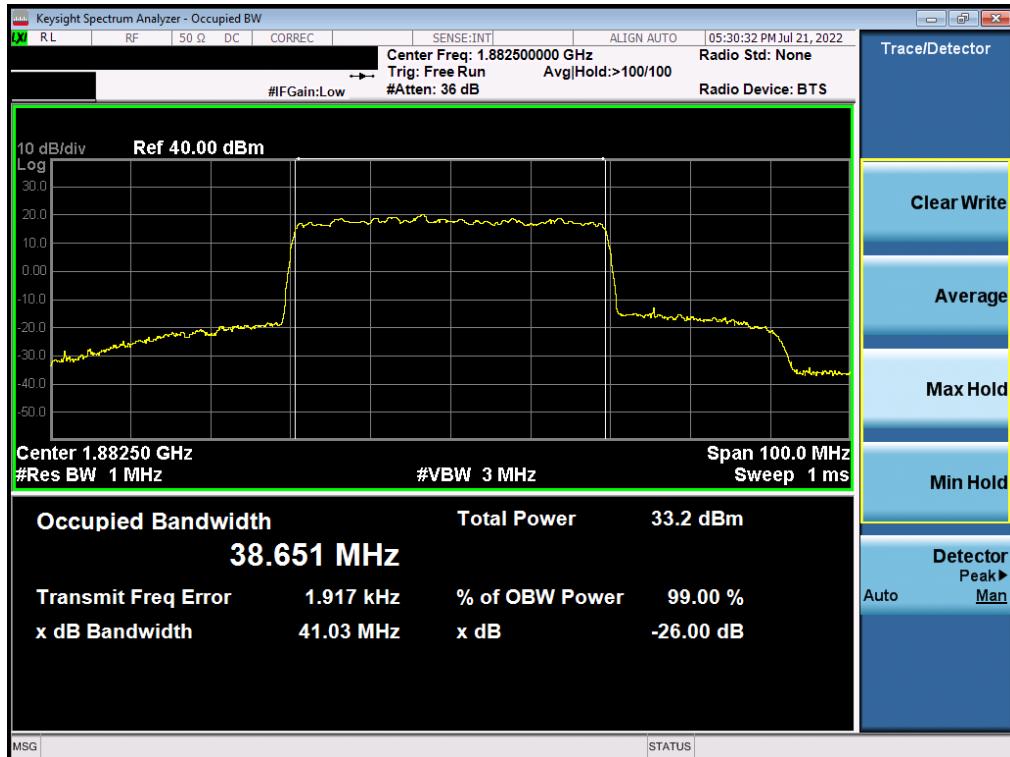

Plot 7-57. Occupied Bandwidth Plot (NR Band n25 - 40.0MHz CP-OFDM 16QAM - Full RB)

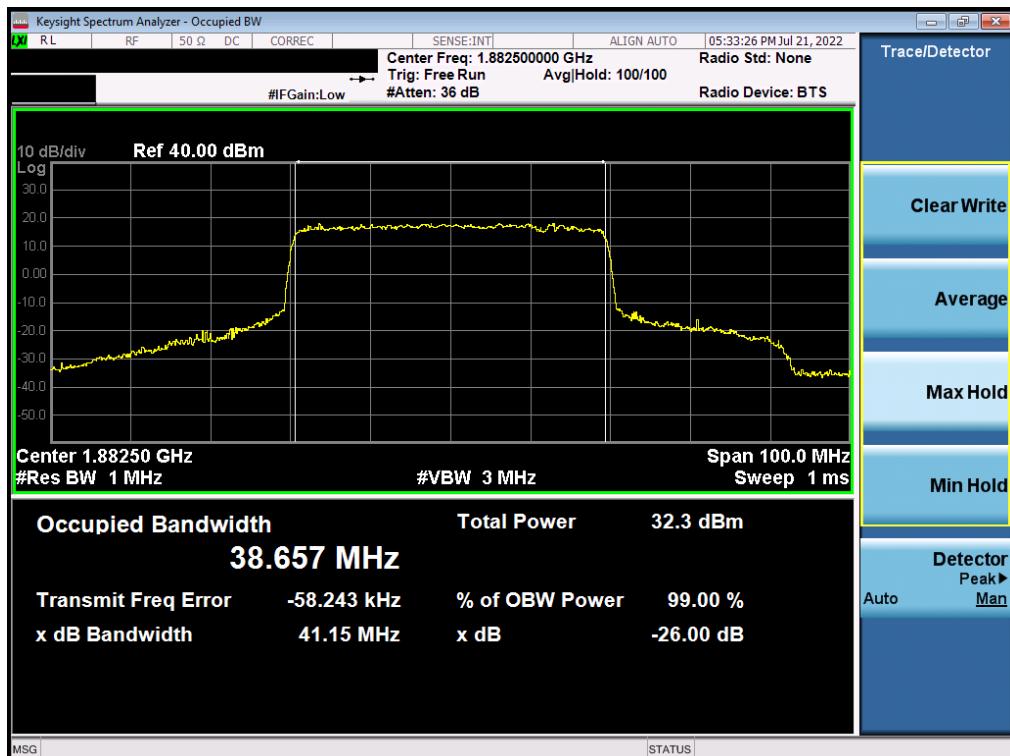

Plot 7-58. Occupied Bandwidth Plot (NR Band n25 - 40.0MHz CP-OFDM 64QAM - Full RB)


FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 43 of 207	



Plot 7-59. Occupied Bandwidth Plot (NR Band n25 - 40.0MHz CP-OFDM 256QAM - Full RB)

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 44 of 207	

## WCDMA PCS

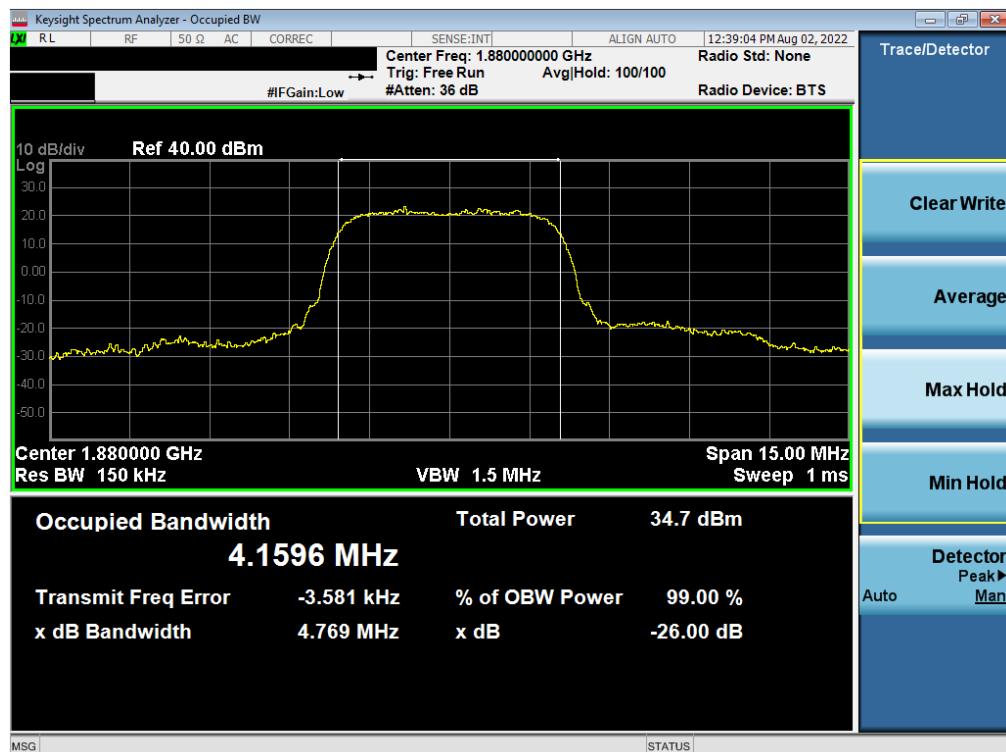

Plot 7-60. Occupied Bandwidth Plot (WCDMA, Ch. 9400)

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 45 of 207	

## 7.3 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051, §24.238(a)

### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section. All ports were tested and only the worst case data were reported.

***The minimum permissible attenuation level of any spurious emission is  $43 + 10 \log_{10}(P_{[Watts]})$ , where P is the transmitter power in Watts.***

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 6.0

### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 20GHz (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

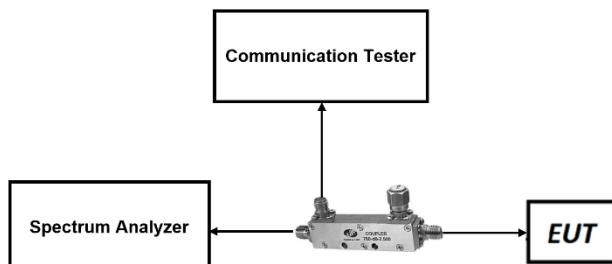

**Figure 7-2. Test Instrument & Measurement Setup**

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 46 of 207	

## Test Notes


1. Per Part 24, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth 100 kHz or greater for measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
2. For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.
3. NR band n25 overlaps the entire frequency range of NR band 2. Therefore, the conducted emissions data of NR band n25 provided in this report covers NR band n2.

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device		Page 47 of 207

## LTE Band 25/2




Plot 7-61. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

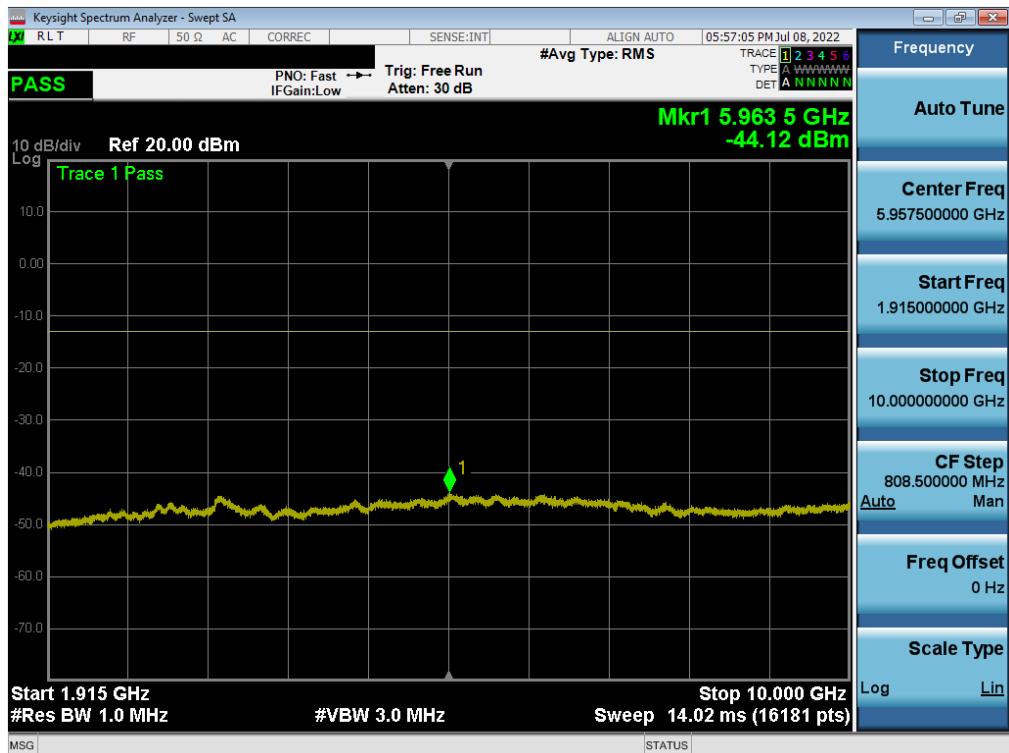


Plot 7-62. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 48 of 207	

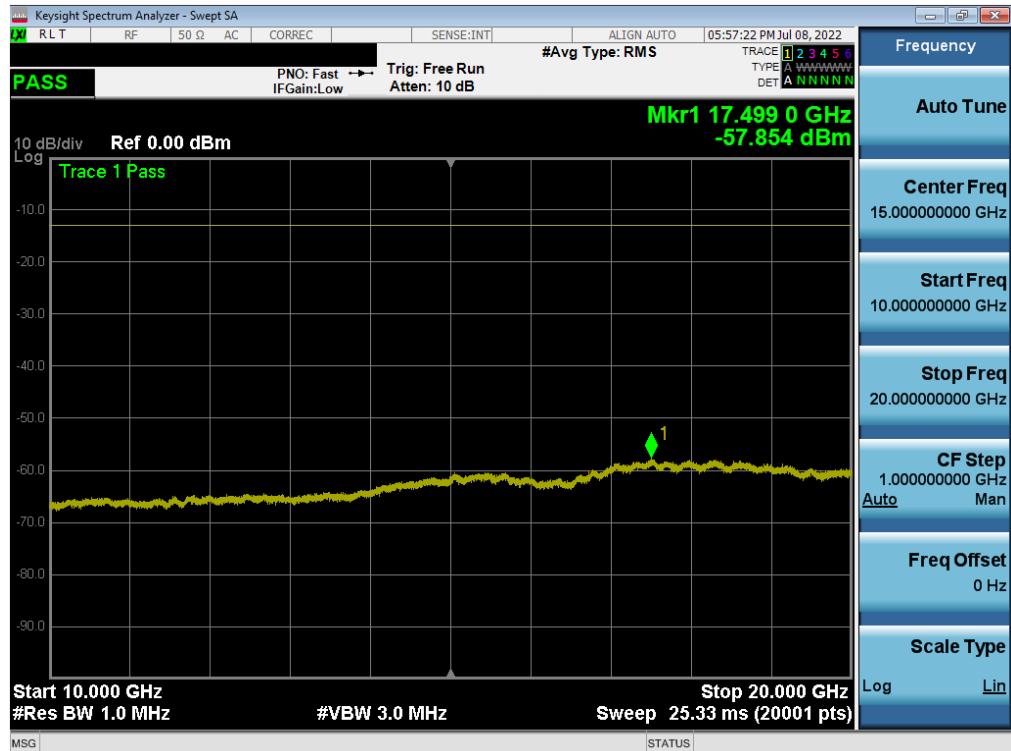


Plot 7-63. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

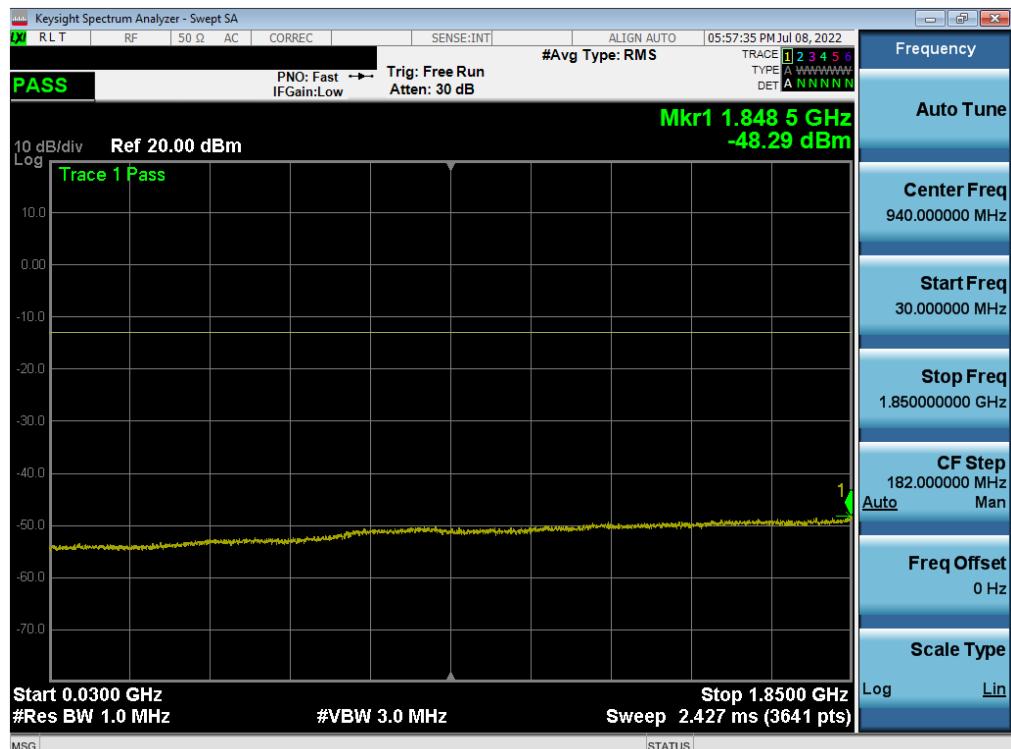


Plot 7-64. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCGA2757	element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 49 of 207	

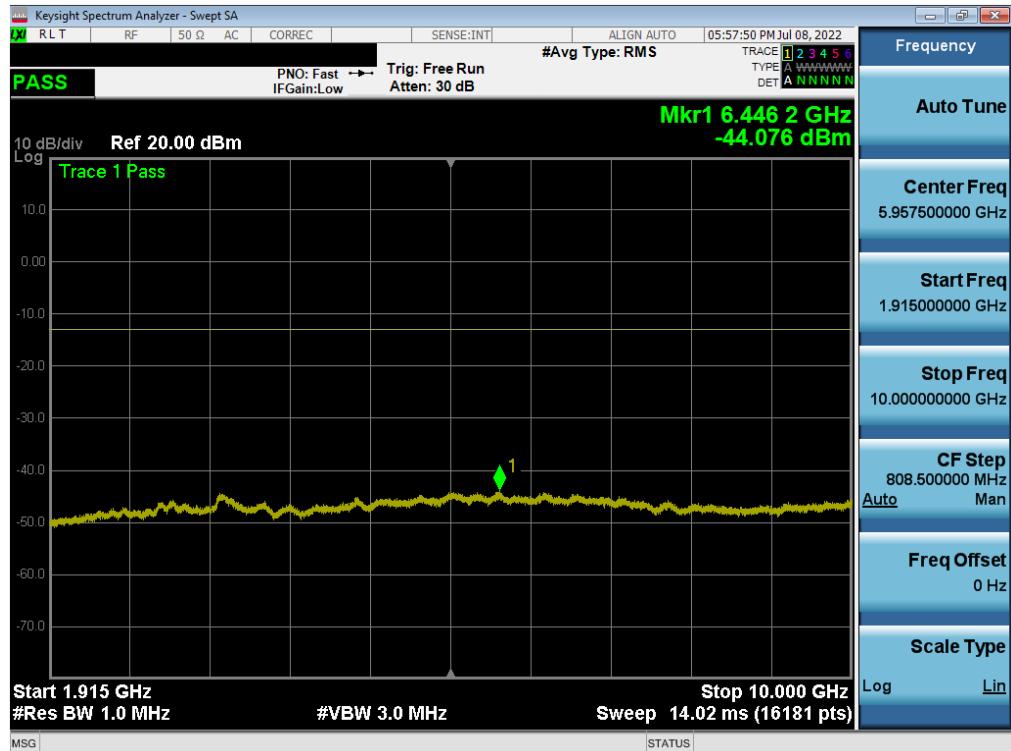


Plot 7-65. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

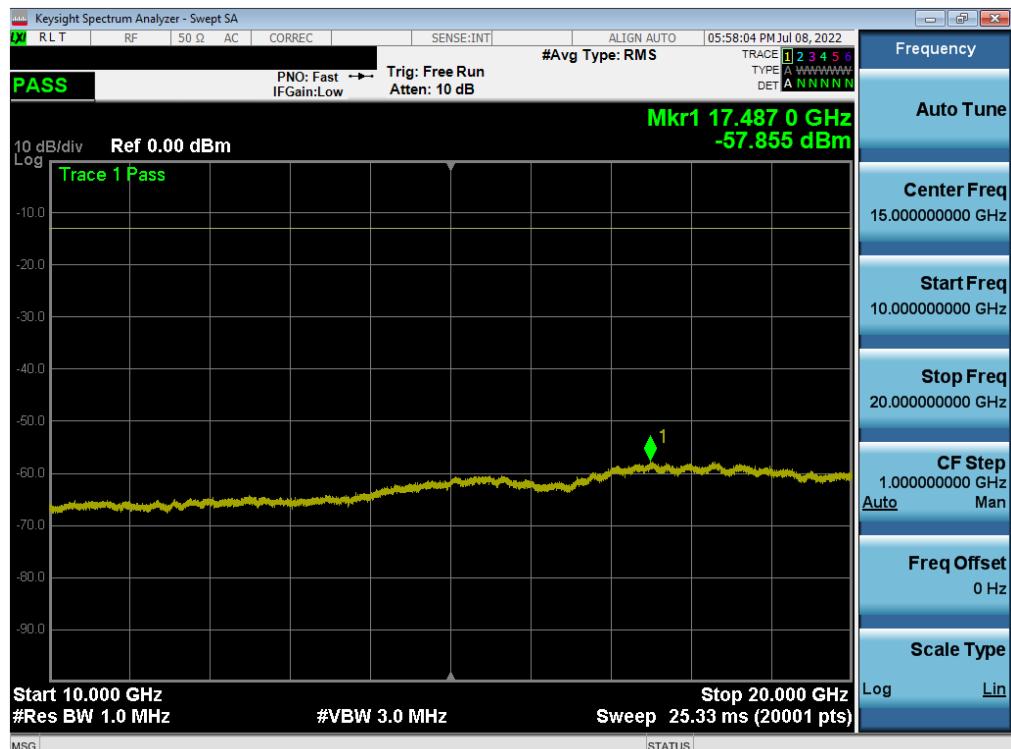


Plot 7-66. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCGA2757	element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 50 of 207	

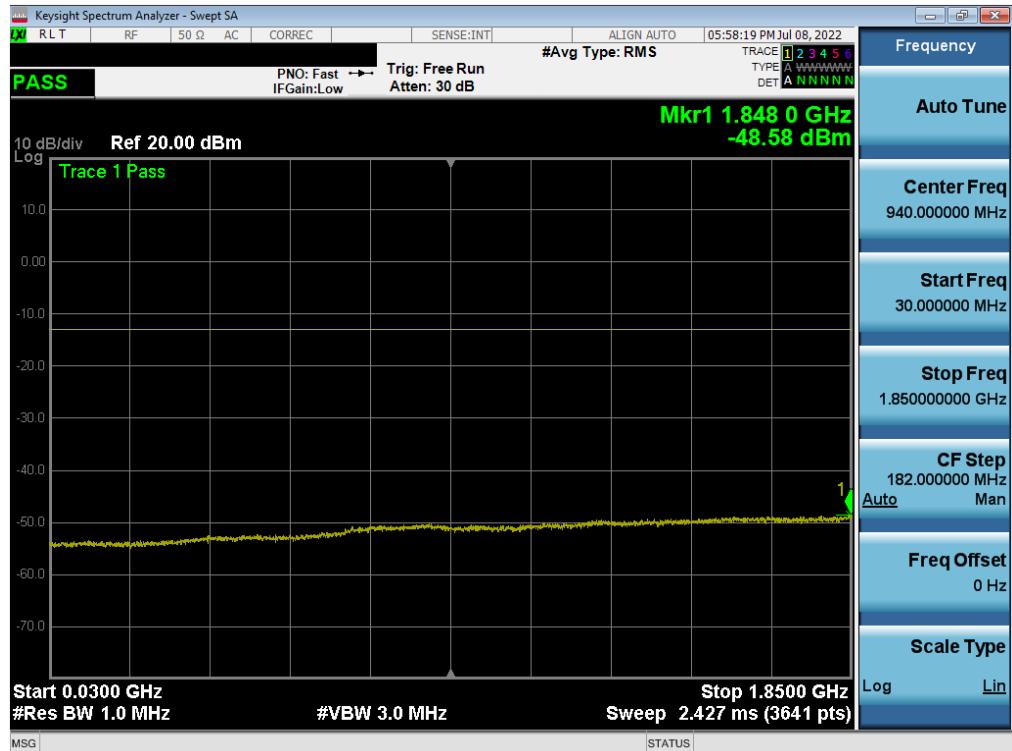

Plot 7-67. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

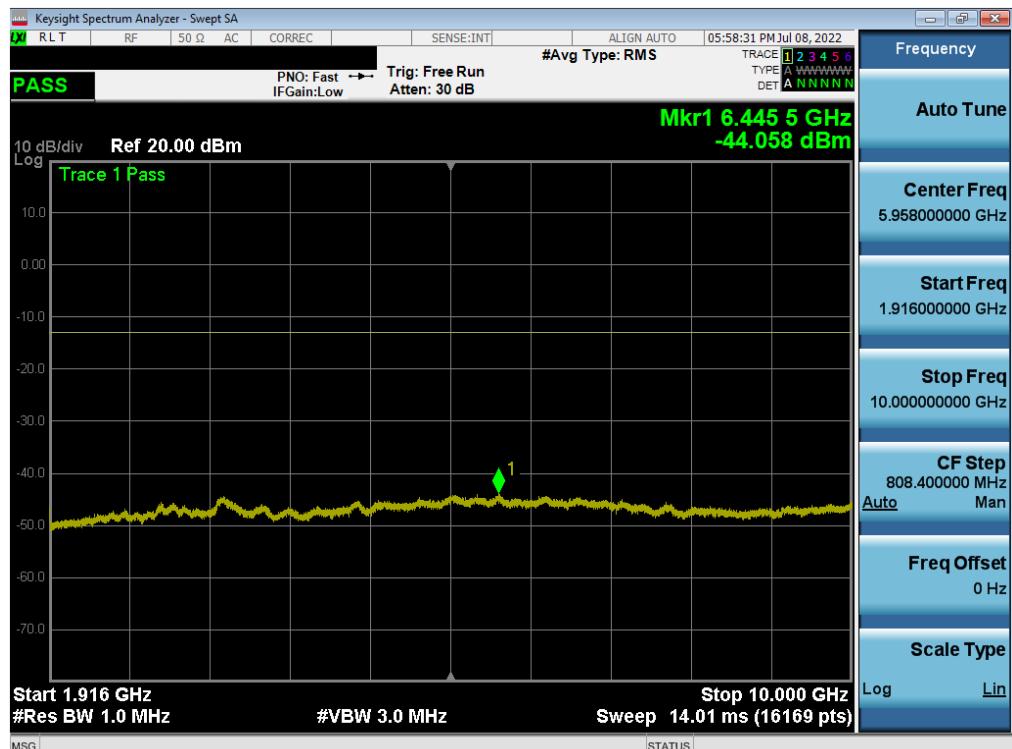

Plot 7-68. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)


FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 51 of 207	




Plot 7-69. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 52 of 207	

## NR Band n25/n2

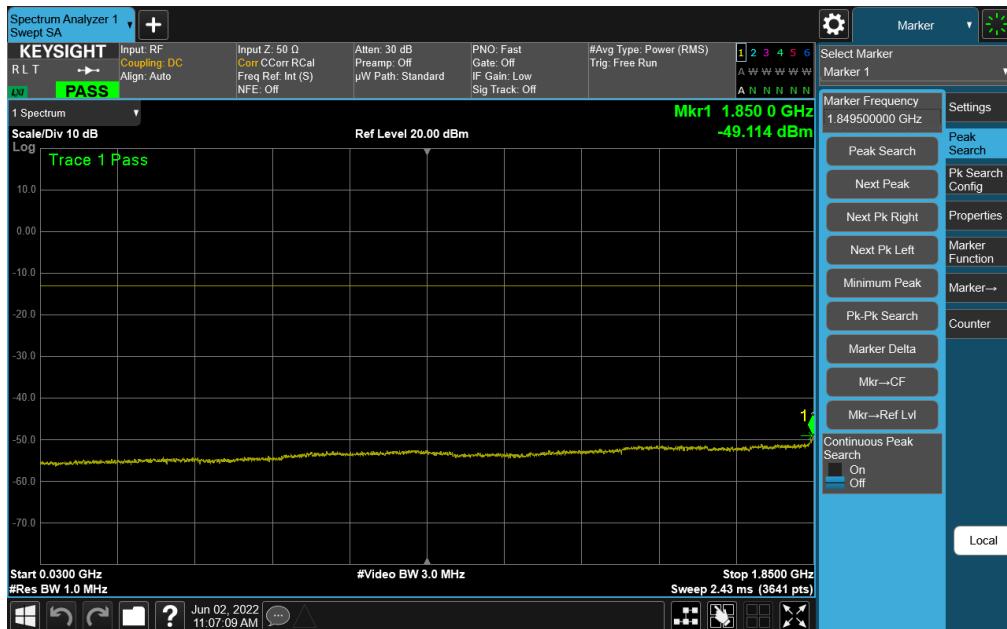


Plot 7-70. Conducted Spurious Plot (NR Band n25 - 40.0MHz - RB Size 1, RB Offset 0 - Low Channel)

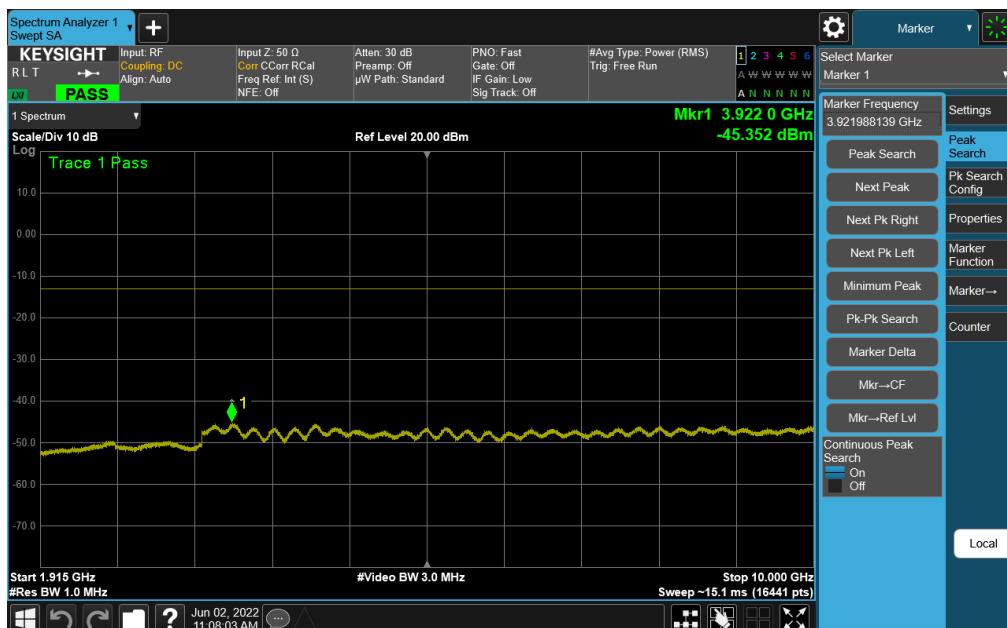


Plot 7-71. Conducted Spurious Plot (NR Band n25 - 40.0MHz - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: BCGA2757	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 53 of 207

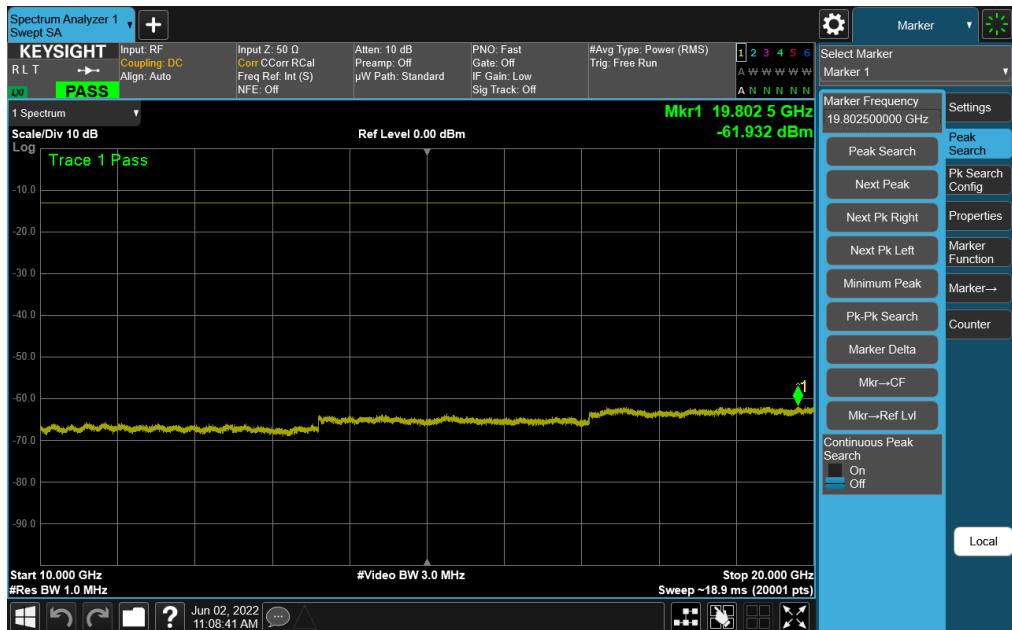


Plot 7-72. Conducted Spurious Plot (NR Band n25 - 40.0MHz - RB Size 1, RB Offset 0 - Low Channel)

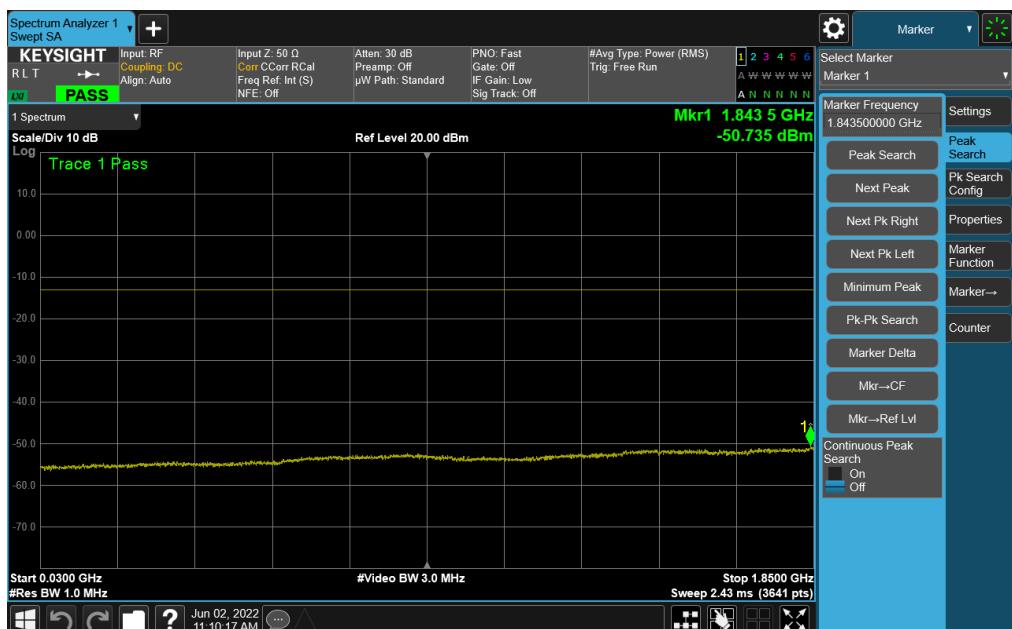


Plot 7-73. Conducted Spurious Plot (NR Band n25 - 40.0MHz - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCGA2757	element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 54 of 207	

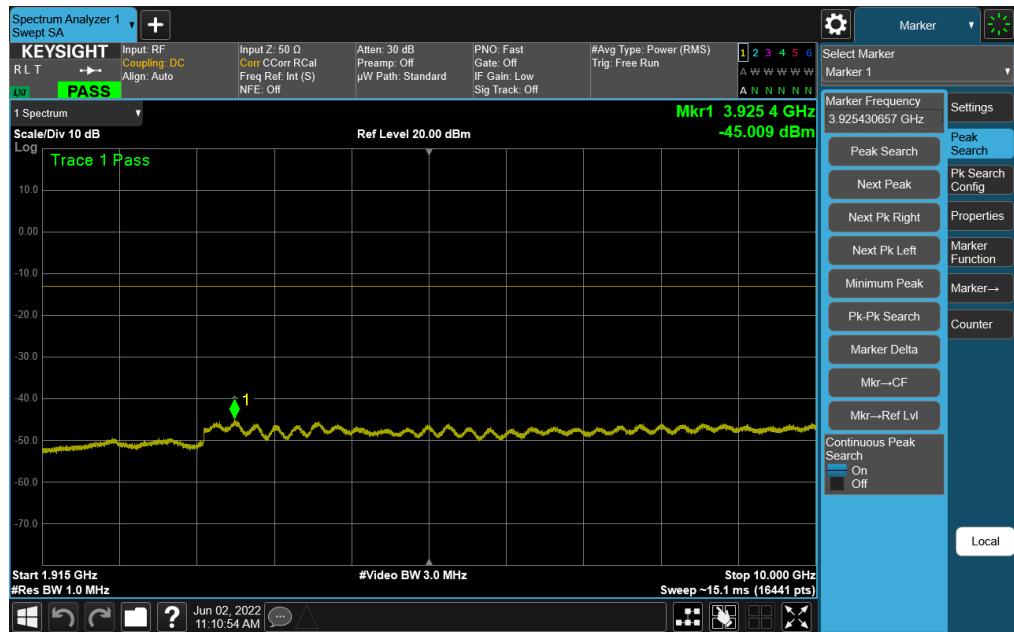


Plot 7-74. Conducted Spurious Plot (NR Band n25 - 40.0MHz - RB Size 1, RB Offset 0 - Mid Channel)

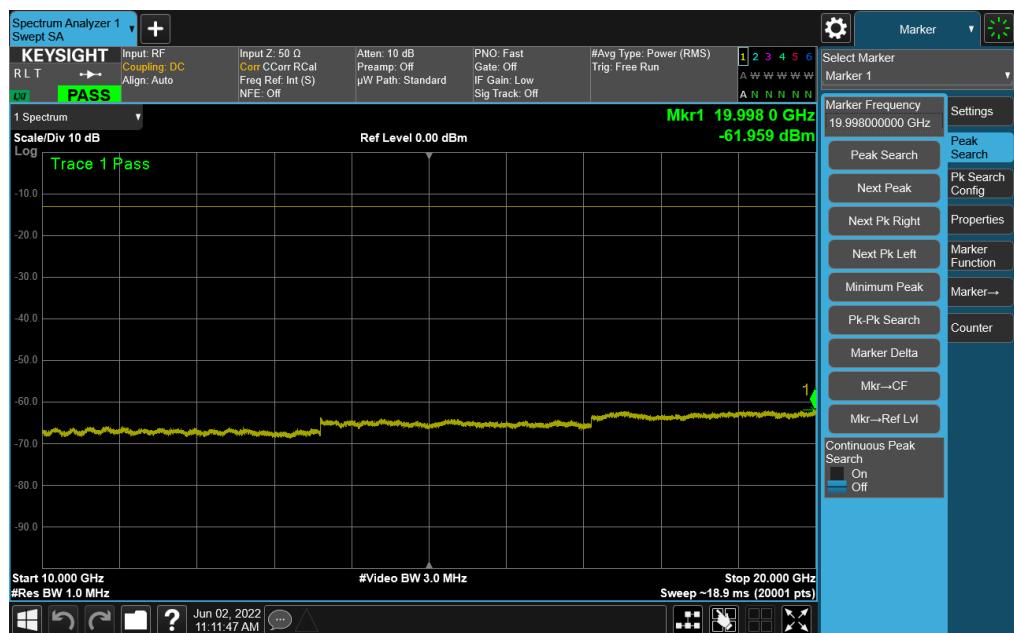


Plot 7-75. Conducted Spurious Plot (NR Band n25 - 40.0MHz - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCGA2757	element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 55 of 207	

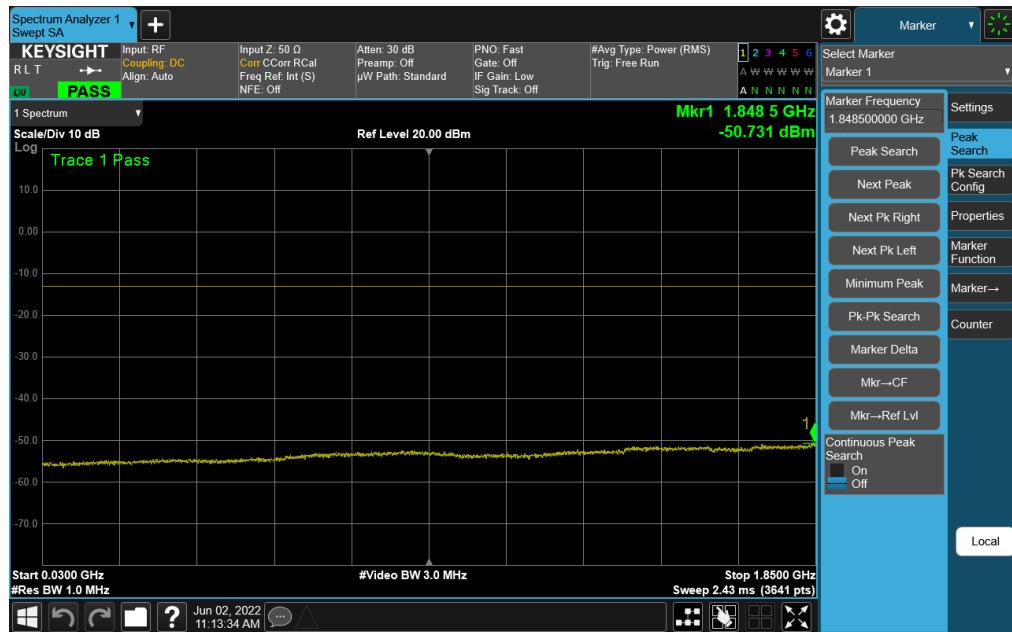


Plot 7-76. Conducted Spurious Plot (NR Band n25 - 40.0MHz - RB Size 1, RB Offset 0 - High Channel)

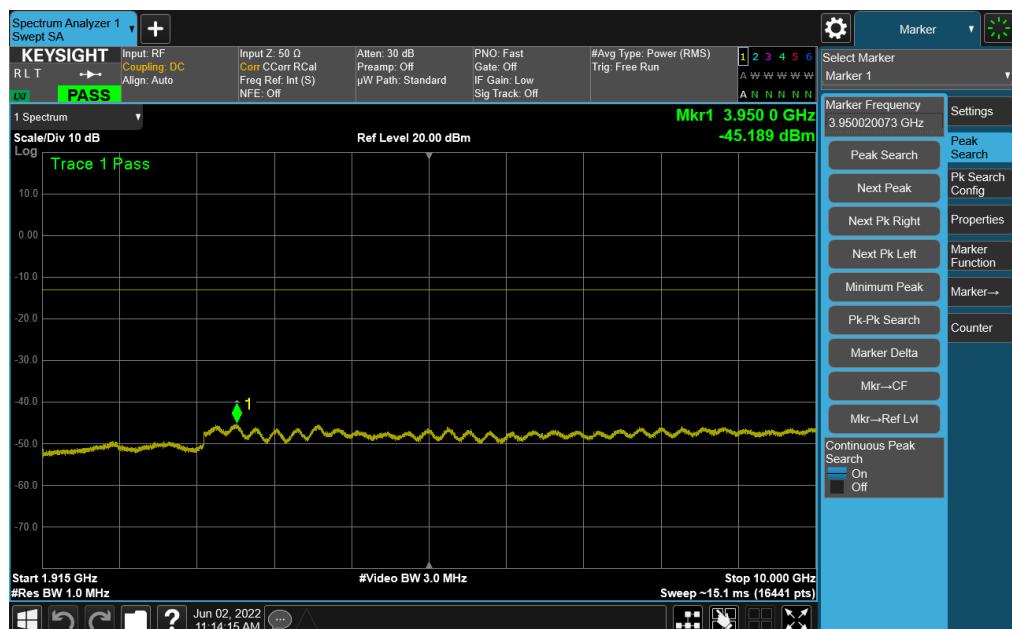

Plot 7-77. Conducted Spurious Plot (NR Band n25 - 40.0MHz - RB Size 1, RB Offset 0 - High Channel)



FCC ID: BCGA2757	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 56 of 207

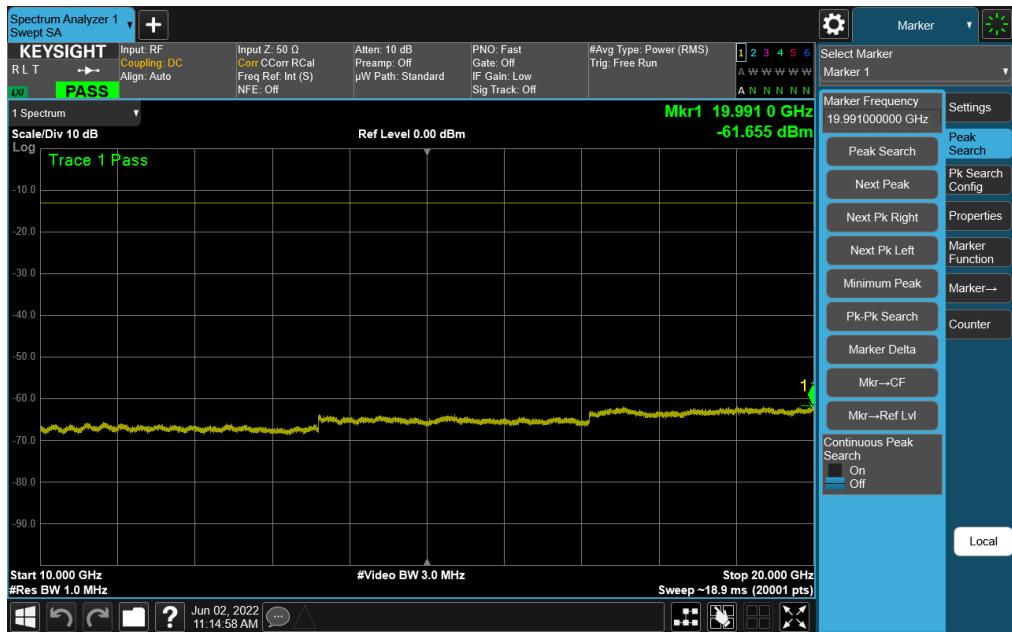


Plot 7-78. Conducted Spurious Plot (NR Band n25 - 40.0MHz - RB Size 1, RB Offset 0 - High Channel)

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 57 of 207	


## WCDMA PCS

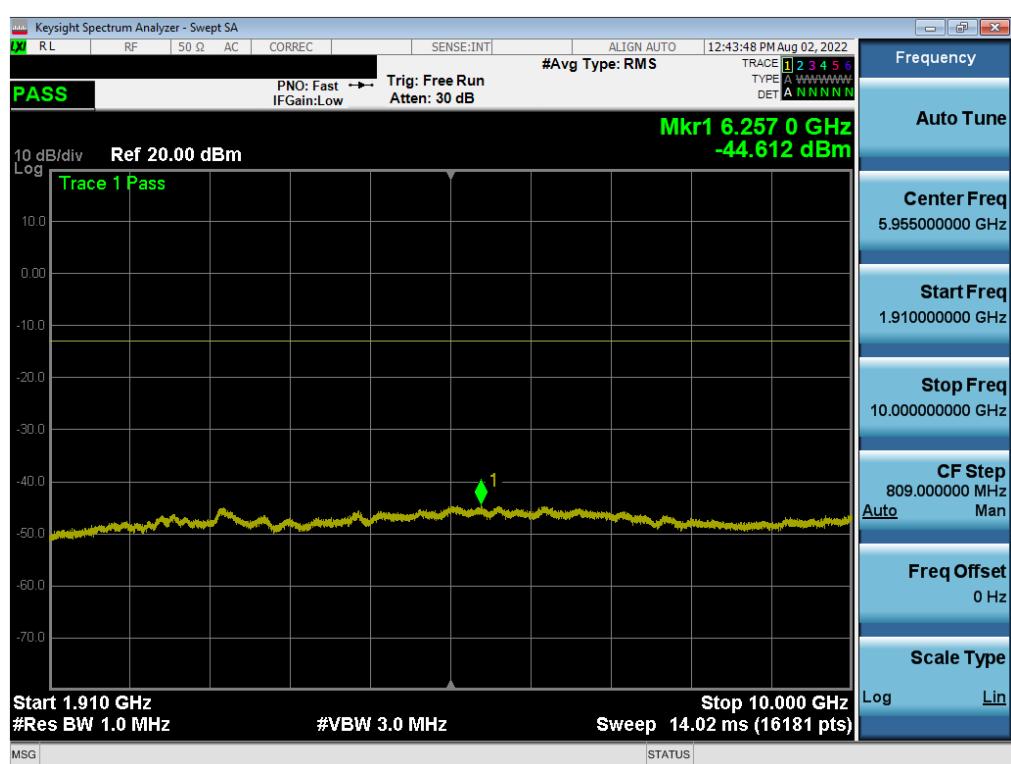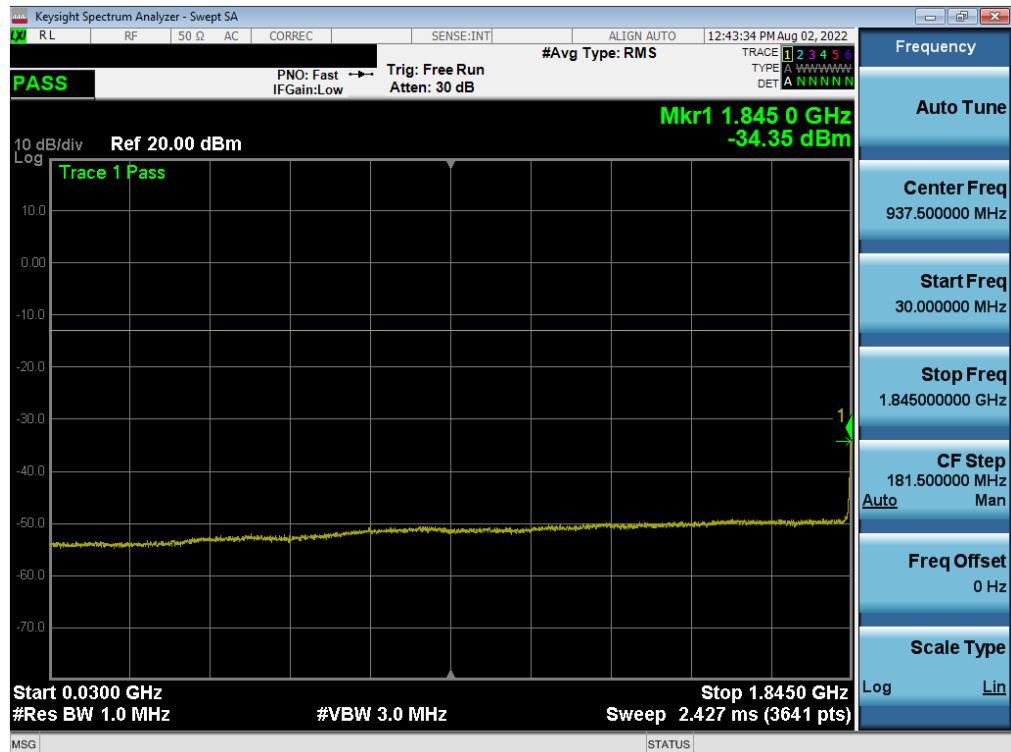

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 58 of 207	

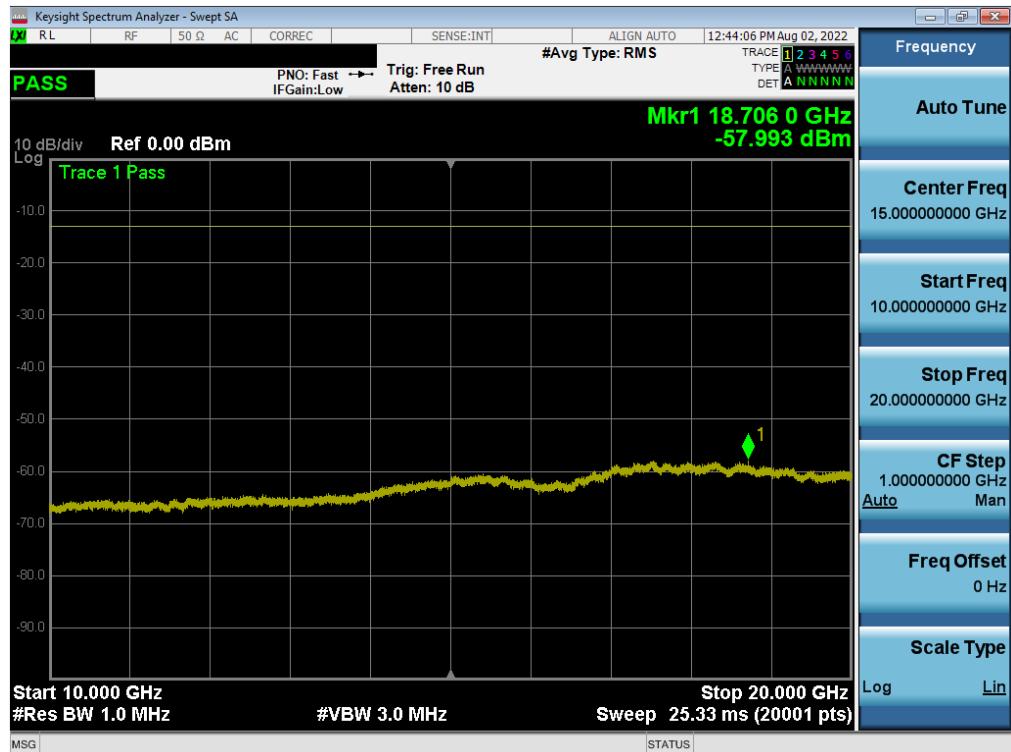


Plot 7-81. Conducted Spurious Plot (WCDMA Ch. 9262)

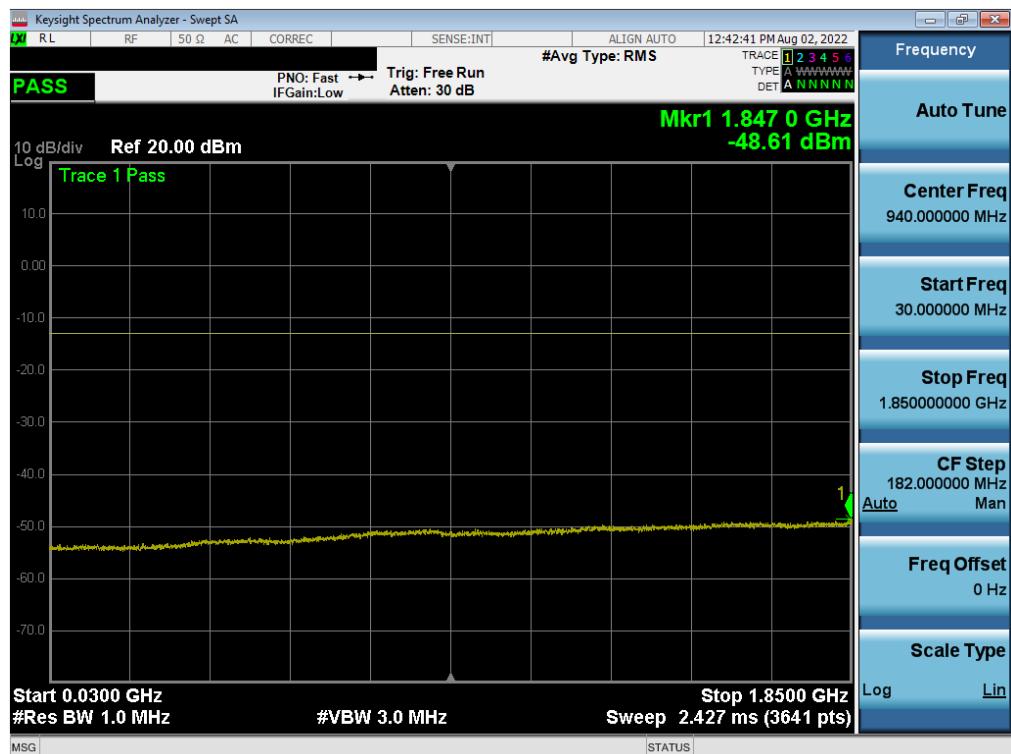


Plot 7-82. Conducted Spurious Plot (WCDMA Ch. 9400)

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 59 of 207	

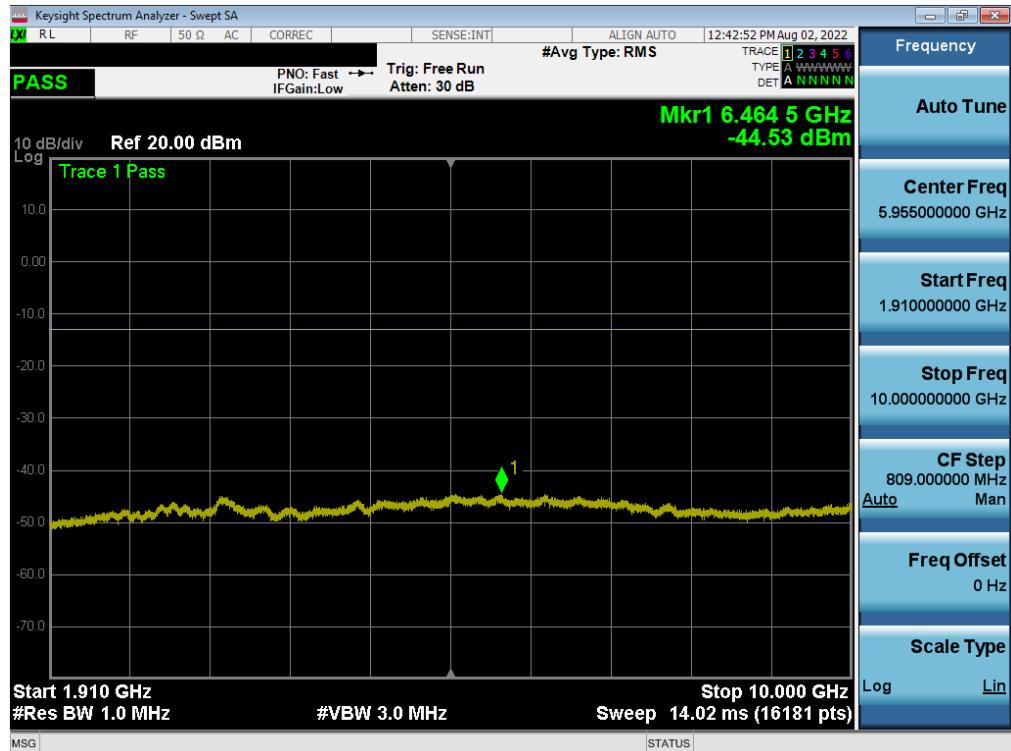

Plot 7-83. Conducted Spurious Plot (WCDMA Ch. 9400)

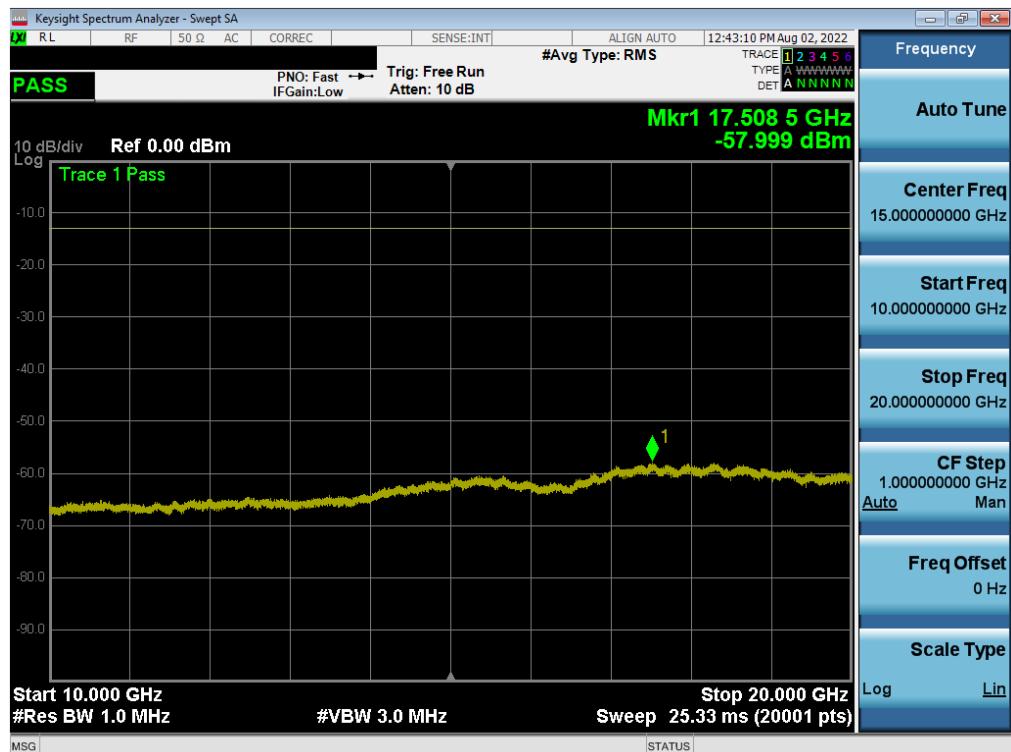


Plot 7-84. Conducted Spurious Plot (WCDMA Ch. 9400)

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 60 of 207	




Plot 7-85. Conducted Spurious Plot (WCDMA Ch. 9538)

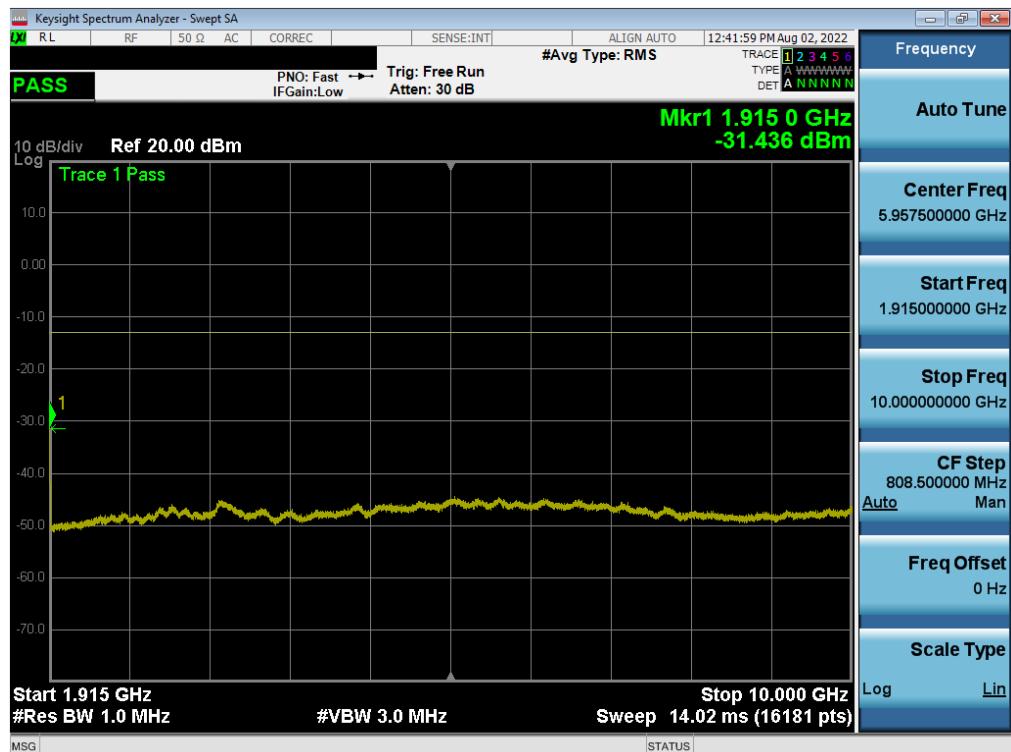

Plot 7-86. Conducted Spurious Plot (WCDMA Ch. 9538)

FCC ID: BCGA2757	element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 61 of 207	

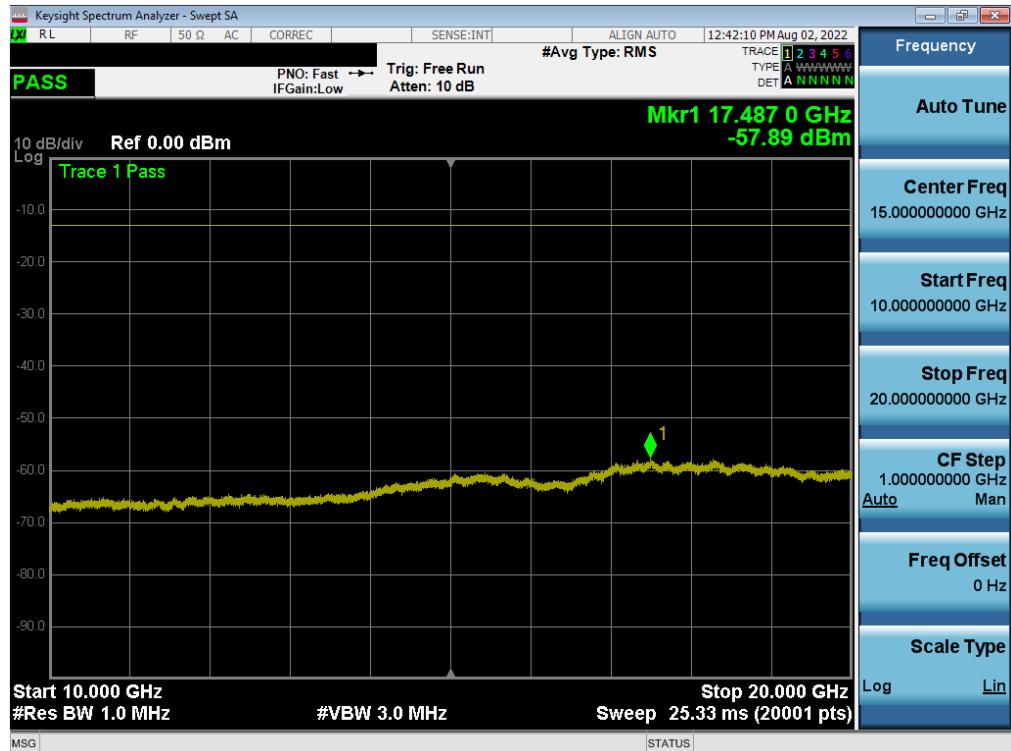

Plot 7-87. Conducted Spurious Plot (WCDMA Ch. 9538)

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 62 of 207	

## 7.4 Band Edge Emissions at Antenna Terminal

§2.1051, §24.238(a)

### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section. All ports were tested and only the worst case data was reported.

***The minimum permissible attenuation level of any spurious emission is  $43 + 10 \log_{10}(P_{[Watts]})$ , where P is the transmitter power in Watts.***

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 6.0

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW  $\geq$  1% of the emission bandwidth
4. VBW  $\geq$  3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq$  2 x Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

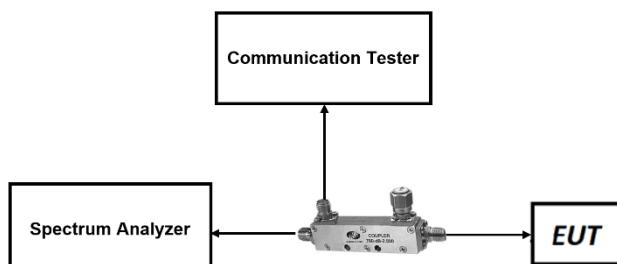

**Figure 7-3. Test Instrument & Measurement Setup**

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device		Page 63 of 207

**Test Notes**


1. Per 24.238(a), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
2. For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device	Page 64 of 207	

## LTE Band 25



Plot 7-88. Lower Band Edge Plot (LTE Band 25 – 1.4MHz QPSK – Full RB Configuration)

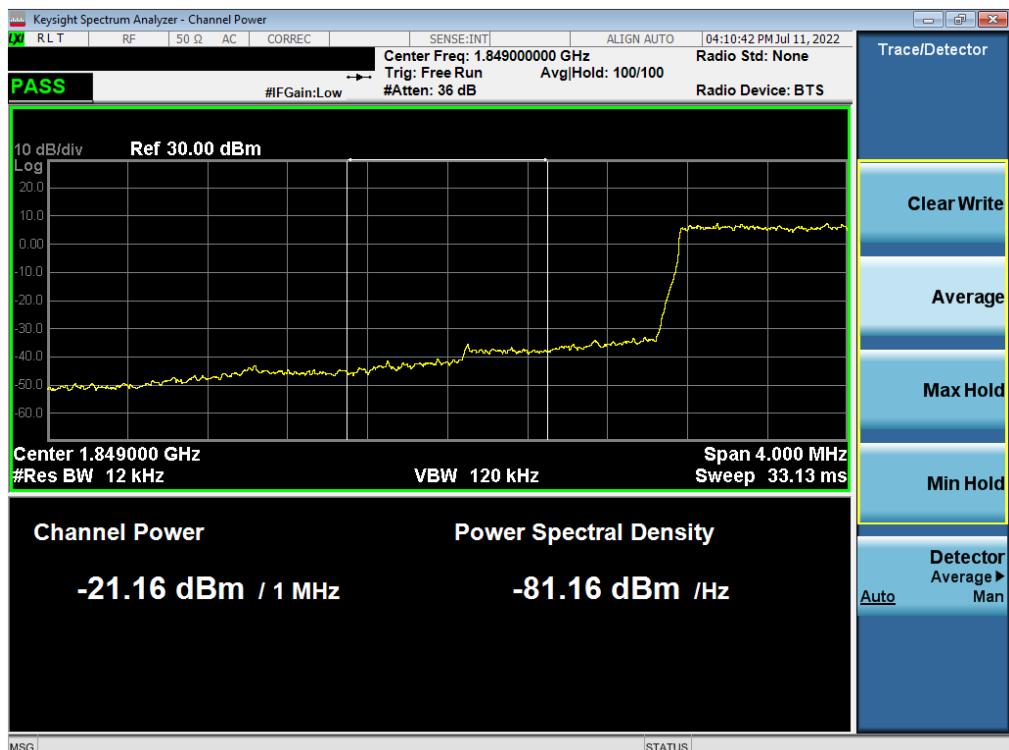

Plot 7-89. Extended Lower Band Edge Plot (LTE Band 25 – 1.4MHz QPSK – Full RB Configuration)

FCC ID: BCGA2757	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-02-R1.BCG	Test Dates: 05/30/2022 - 08/29/2022	EUT Type: Tablet Device		Page 65 of 207