




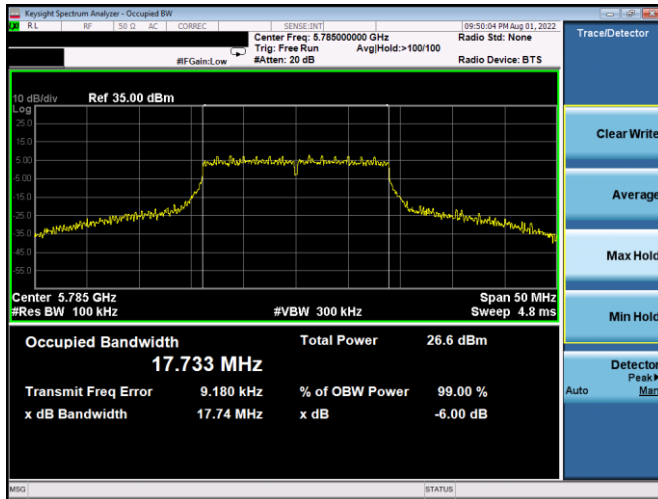


Plot 7-211. 6dB BW & 99% OBW Antenna 1b (20MHz BW 802.11n – Ch. 157, MCS7)

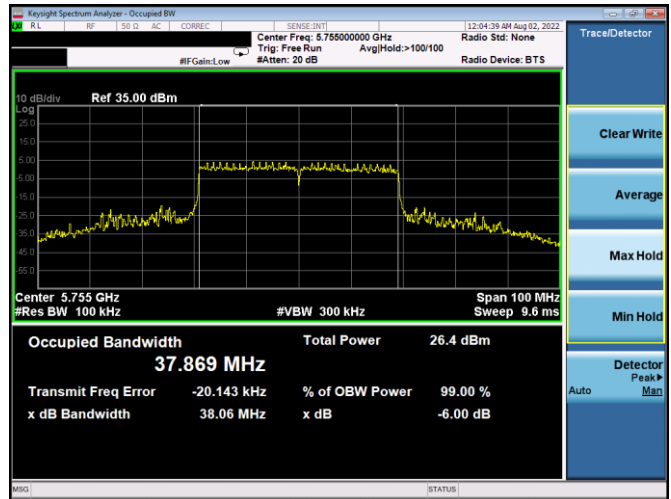


Plot 7-214. 6dB BW & 99% OBW Antenna 1b (40MHz BW 802.11ax(SU) – Ch. 151, MCS11)

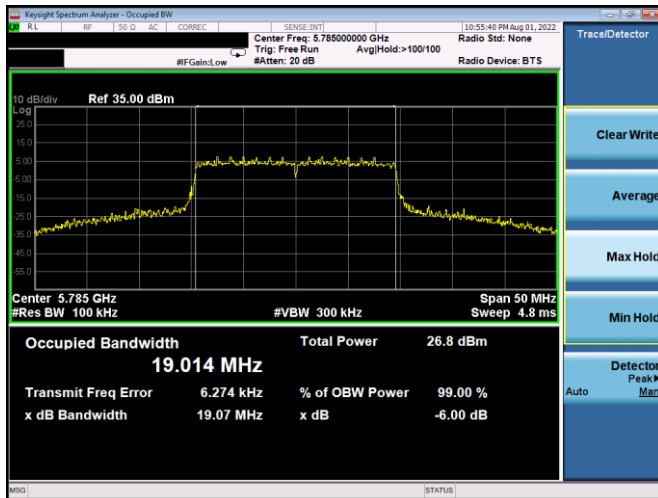


Plot 7-212. 6dB BW & 99% OBW Antenna 1b (20MHz BW 802.11ax(SU) – Ch. 157, MCS11)

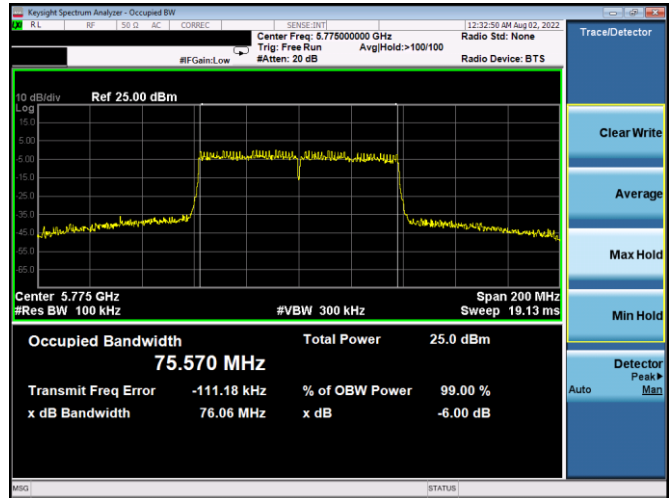

Plot 7-215. 6dB BW & 99% OBW Antenna 1b (80MHz BW 802.11ac – Ch. 155, MCS9)

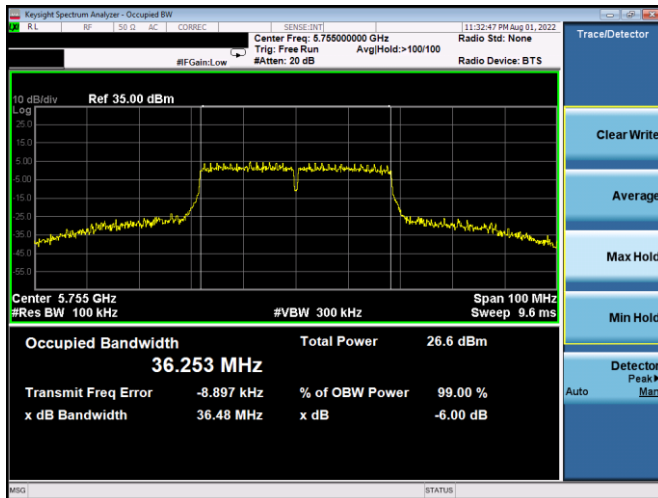

Plot 7-213. 6dB BW & 99% OBW Antenna 1b (40MHz BW 802.11n – Ch. 151, MCS7)

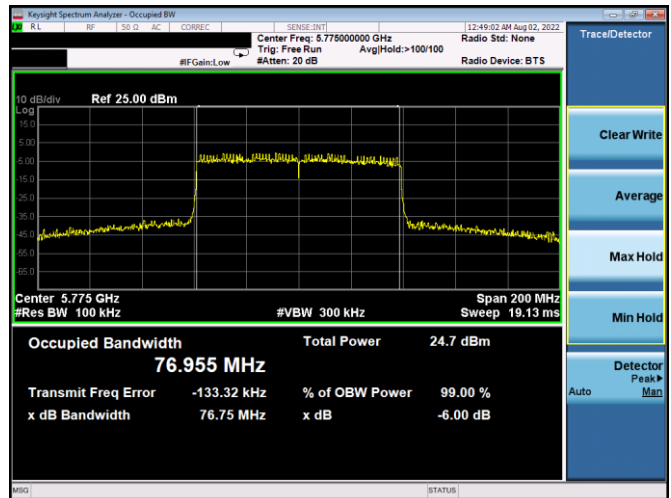

Plot 7-216. 6dB BW & 99% OBW Antenna 1b (80MHz BW 802.11ax(SU) – Ch. 155, MCS11)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 68 of 534

7.4 Conducted Output Power and Max EIRP Measurement – 802.11a/n/ac/ax(SU)

§15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. B is the 99% OBW per ISSED RSS-247 and 26dB BW is per FCC 15.407.

In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is 250mW (23.98dBm). The maximum e.i.r.p. shall not exceed the lesser of 200 mW or $10 + 10 \log_{10}B$, dBm.

In the 5.25 – 5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) or $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(19.34) = 23.86\text{dBm}$. The maximum e.i.r.p. shall not exceed the lesser of 1.0 W or $17 + 10 \log_{10}B$, dBm.

In the 5.47 – 5.725GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) or $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(19.50) = 23.90\text{dBm}$. The maximum e.i.r.p. shall not exceed the lesser of 1.0 W or $17 + 10 \log_{10}B$, dBm.

In the 5.725 – 5.850GHz band, the maximum permissible conducted output power is 1W (30dBm). The maximum e.i.r.p. is 36 dBm.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.3.2 Method PM-G
KDB 789033 D02 v02r01 – Section E3)b) Method PM-G
ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique
KDB 662911 v02r01 – Section E1) Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

- Per RSS-247 Section 6.2.3, transmission on channels which overlap the 5600-5650 MHz is prohibited. This device operates under these frequencies only under the control of a certified master device and does not support active scanning on these channels. This device does not transmit any beacons or initiate any transmissions in UNII Bands 2A or 2C.

FCC ID: BCGA2757 IC: 579C-A2757		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 69 of 534

V 10.5 12/15/2021

7.4.1 FCC Antenna 3c Conducted Output Power Measurements

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11a	802.11n	802.11ax		
	5180	36	AVG	17.72	17.93	17.40	23.98	-6.05
	5200	40	AVG	19.81	19.99	19.84	23.98	-3.99
	5240	48	AVG	19.85	19.87	19.95	23.98	-4.11
	5260	52	AVG	19.84	19.97	19.80	23.98	-4.01
	5300	60	AVG	19.98	19.84	19.81	23.98	-4.00
	5320	64	AVG	18.38	18.50	18.29	23.98	-5.48
	5500	100	AVG	18.36	18.41	17.29	23.98	-5.57
	5520	104	AVG	19.84	19.77	19.00	23.98	-4.14
	5580	116	AVG	19.78	19.88	19.99	23.98	-4.10
	5660	132	AVG	19.82	19.85	19.78	23.98	-4.13
	5680	136	AVG	19.29	19.25	18.88	23.98	-4.69
	5700	140	AVG	16.43	16.26	15.21	23.98	-7.55
	5720	144	AVG	19.98	19.88	19.82	23.98	-4.00
	5745	149	AVG	20.26	20.37	20.42	30.00	-9.63
	5785	157	AVG	20.36	20.34	20.35	30.00	-9.64
	5825	165	AVG	20.30	20.28	20.37	30.00	-9.70

Table 7-20. FCC Antenna 3c 20MHz BW (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11a	802.11n	802.11ax		
	5180	36	AVG	16.61	16.69	16.41	23.98	-7.29
	5200	40	AVG	19.93	19.84	19.78	23.98	-4.05
	5240	48	AVG	19.94	19.92	19.82	23.98	-4.04
	5260	52	AVG	19.96	19.90	19.74	23.98	-4.02
	5300	60	AVG	20.00	19.82	19.99	23.98	-3.98
	5320	64	AVG	17.70	17.48	17.41	23.98	-6.28
	5500	100	AVG	16.85	16.84	16.43	23.98	-7.13
	5520	104	AVG	19.40	19.27	18.96	23.98	-4.58
	5540	108	AVG	19.97	20.00	19.79	23.98	-3.98
	5580	116	AVG	19.89	20.00	19.98	23.98	-3.98
	5660	132	AVG	19.92	19.81	19.83	23.98	-4.06
	5680	136	AVG	19.00	18.74	18.22	23.98	-4.98
	5700	140	AVG	15.20	15.21	14.54	23.98	-8.77
	5720	144	AVG	19.71	19.78	19.77	23.98	-4.20
	5745	149	AVG	20.34	20.33	20.50	30.00	-9.66
	5785	157	AVG	20.31	20.40	20.41	30.00	-9.60
	5825	165	AVG	20.50	20.38	20.50	30.00	-9.50

Table 7-21. FCC Antenna 3c 20MHz BW (UNII) Maximum Conducted Output Power (Mid Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 70 of 534

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11a	802.11n	802.11ax		
	5180	36	AVG	16.24	16.20	15.97	23.98	-7.74
	5200	40	AVG	19.80	19.90	19.92	23.98	-4.08
	5240	48	AVG	19.79	19.83	19.91	23.98	-4.15
	5260	52	AVG	20.00	19.76	19.89	23.98	-3.98
	5300	60	AVG	19.82	19.78	19.88	23.98	-4.16
	5320	64	AVG	16.57	16.57	16.50	23.98	-7.41
	5500	100	AVG	15.00	15.12	14.93	23.98	-8.86
	5520	104	AVG	18.99	18.92	18.00	23.98	-4.99
	5540	108	AVG	19.95	19.85	19.84	23.98	-4.03
	5580	116	AVG	19.87	19.82	19.83	23.98	-4.11
	5660	132	AVG	19.81	19.92	19.83	23.98	-4.06
	5680	136	AVG	17.97	17.86	17.90	23.98	-6.01
	5700	140	AVG	12.60	12.88	12.93	23.98	-11.10
	5720	144	AVG	19.82	19.82	19.82	23.98	-4.16
	5745	149	AVG	20.33	20.50	20.30	30.00	-9.50
	5785	157	AVG	20.43	20.45	20.31	30.00	-9.55
	5825	165	AVG	20.32	20.50	20.50	30.00	-9.50

Table 7-22. FCC Antenna 3c 20MHz BW (UNII) Maximum Conducted Output Power (High Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11n	802.11ax		
	5190	38	AVG	16.42	15.54	23.98	-7.56
	5230	46	AVG	19.37	19.21	23.98	-4.61
	5270	54	AVG	19.39	19.43	23.98	-4.59
	5310	62	AVG	14.83	13.89	23.98	-9.15
	5510	102	AVG	14.85	14.40	23.98	-9.13
	5550	110	AVG	19.35	19.43	23.98	-4.63
	5630	126	AVG	19.32	19.40	23.98	-4.66
	5670	134	AVG	17.99	16.75	23.98	-5.99
	5710	142	AVG	19.34	19.22	23.98	-4.64
	5755	151	AVG	19.40	19.44	30.00	-10.60
	5795	159	AVG	19.43	19.40	30.00	-10.57

Table 7-23. FCC Antenna 3c 40MHz BW (UNII) Maximum Conducted Output Power (Low Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 71 of 534

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11n	802.11ax		
	5190	38	AVG	14.92	15.00	23.98	-9.06
	5230	46	AVG	19.49	19.29	23.98	-4.49
	5270	54	AVG	19.48	19.27	23.98	-4.50
	5310	62	AVG	13.80	14.00	23.98	-10.18
	5510	102	AVG	14.19	13.88	23.98	-9.79
	5550	110	AVG	19.40	19.12	23.98	-4.58
	5630	126	AVG	19.48	19.44	23.98	-4.50
	5670	134	AVG	17.50	16.44	23.98	-6.48
	5710	142	AVG	19.43	19.50	23.98	-4.55
	5755	151	AVG	19.35	19.37	30.00	-10.65
	5795	159	AVG	19.44	19.36	30.00	-10.56

Table 7-24. FCC Antenna 3c 40MHz BW (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11n	802.11ax		
	5190	38	AVG	13.59	13.68	23.98	-10.39
	5230	46	AVG	19.38	18.90	23.98	-4.60
	5270	54	AVG	19.42	19.50	23.98	-4.56
	5310	62	AVG	13.70	13.47	23.98	-10.28
	5510	102	AVG	12.84	12.24	23.98	-11.14
	5550	110	AVG	18.32	17.95	23.98	-5.66
	5590	118	AVG	19.33	19.32	23.98	-4.65
	5630	126	AVG	19.49	18.91	23.98	-4.49
	5670	134	AVG	15.43	14.83	23.98	-8.55
	5710	142	AVG	19.36	19.50	23.98	-4.62
	5755	151	AVG	19.35	19.21	30.00	-10.65
	5795	159	AVG	19.36	19.47	30.00	-10.64

Table 7-25. FCC Antenna 3c 40MHz BW (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 72 of 534

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11ac	802.11ax		
	5210	42	AVG	15.11	14.31	23.98	-8.87
	5290	58	AVG	12.35	12.93	23.98	-11.63
	5530	106	AVG	14.42	13.25	23.98	-9.56
	5610	122	AVG	19.40	18.29	23.98	-4.58
	5690	138	AVG	19.74	19.78	23.98	-4.24
	5775	155	AVG	18.89	18.13	30.00	-11.11

Table 7-26. FCC Antenna 3c 80MHz BW (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11ac	802.11ax		
	5210	42	AVG	14.73	14.24	23.98	-9.25
	5290	58	AVG	12.47	11.98	23.98	-11.51
	5530	106	AVG	13.55	12.70	23.98	-10.43
	5610	122	AVG	18.92	17.92	23.98	-5.06
	5690	138	AVG	19.98	20.00	23.98	-4.00
	5775	155	AVG	17.70	17.22	30.00	-12.30

Table 7-27. FCC Antenna 3c 80MHz BW (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11ac	802.11ax		
	5210	42	AVG	14.44	13.97	23.98	-9.54
	5290	58	AVG	11.95	11.82	23.98	-12.03
	5530	106	AVG	12.87	12.26	23.98	-11.11
	5610	122	AVG	17.74	16.98	23.98	-6.24
	5690	138	AVG	19.75	19.83	23.98	-4.23
	5775	155	AVG	17.33	17.18	30.00	-12.67

Table 7-28. FCC Antenna 3c 80MHz BW (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 73 of 534

7.4.2 ISED Antenna 3c Conducted Output Power Measurements

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11n	802.11ax						
	5180	36	AVG	15.98	15.99	15.95	-	-	2.80	18.79	23.01	-4.22
	5200	40	AVG	15.99	15.99	15.88	-	-	2.80	18.79	23.01	-4.22
	5240	48	AVG	15.96	15.86	15.93	-	-	2.80	18.76	23.01	-4.25
	5260	52	AVG	19.84	19.97	19.80	23.98	-4.01	1.90	21.87	30.00	-8.13
	5300	60	AVG	19.98	19.84	19.81	23.98	-4.00	1.90	21.88	30.00	-8.12
	5320	64	AVG	18.38	18.50	18.29	23.98	-5.48	1.90	20.40	30.00	-9.60
	5500	100	AVG	18.36	18.41	17.29	23.98	-5.57	3.60	22.01	30.00	-7.99
	5520	104	AVG	19.84	19.77	19.00	23.98	-4.14	3.60	23.44	30.00	-6.56
	5580	116	AVG	19.78	19.88	19.99	23.98	-4.10	3.60	23.48	30.00	-6.52
	5660	132	AVG	19.82	19.85	19.78	23.98	-4.13	3.60	23.45	30.00	-6.55
	5680	136	AVG	19.29	19.25	18.88	23.98	-4.69	3.60	22.89	30.00	-7.11
	5700	140	AVG	16.43	16.26	15.21	23.98	-7.55	3.60	20.03	30.00	-9.97
	5720	144	AVG	19.98	19.88	19.82	23.98	-4.00	3.60	23.58	30.00	-6.42
	5745	149	AVG	20.26	20.37	20.42	30.00	-9.63	3.20	23.57	-	-
	5785	157	AVG	20.36	20.34	20.35	30.00	-9.64	3.20	23.56	-	-
	5825	165	AVG	20.30	20.28	20.37	30.00	-9.70	3.20	23.50	-	-

Table 7-29. ISED Antenna 3c 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11n	802.11ax						
	5180	36	AVG	15.91	15.85	15.85	-	-	2.80	18.71	23.01	-4.30
	5200	40	AVG	15.96	15.94	15.94	-	-	2.80	18.76	23.01	-4.25
	5240	48	AVG	15.89	15.92	15.87	-	-	2.80	18.72	23.01	-4.29
	5260	52	AVG	19.96	19.90	19.74	23.98	-4.02	1.90	21.86	30.00	-8.14
	5300	60	AVG	20.00	19.82	19.99	23.98	-3.98	1.90	21.90	30.00	-8.10
	5320	64	AVG	17.70	17.48	17.41	23.98	-6.28	1.90	19.60	30.00	-10.40
	5500	100	AVG	16.85	16.84	16.43	23.98	-7.13	3.60	20.45	30.00	-9.55
	5520	104	AVG	19.40	19.27	18.96	23.98	-4.58	3.60	23.00	30.00	-7.00
	5540	108	AVG	19.97	20.00	19.79	23.98	-3.98	3.60	23.60	30.00	-6.40
	5580	116	AVG	19.89	20.00	19.98	23.98	-3.98	3.60	23.60	30.00	-6.40
	5660	132	AVG	19.92	19.81	19.83	23.98	-4.06	3.60	23.52	30.00	-6.48
	5680	136	AVG	19.00	18.74	18.22	23.98	-4.98	3.60	22.60	30.00	-7.40
	5700	140	AVG	15.20	15.21	14.54	23.98	-8.77	3.60	18.81	30.00	-11.19
	5720	144	AVG	19.71	19.78	19.77	23.98	-4.20	3.60	23.38	30.00	-6.62
	5745	149	AVG	20.34	20.33	20.50	30.00	-9.66	3.20	23.54	-	-
	5785	157	AVG	20.31	20.40	20.41	30.00	-9.60	3.20	23.60	-	-
	5825	165	AVG	20.50	20.38	20.50	30.00	-9.50	3.20	23.70	-	-

Table 7-30. ISED Antenna 3c 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 74 of 534

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11n	802.11ax						
	5180	36	AVG	15.99	15.96	15.99	-	-	2.80	18.79	23.01	-4.22
	5200	40	AVG	15.96	15.97	15.97	-	-	2.80	18.77	23.01	-4.24
	5240	48	AVG	15.97	15.96	15.86	-	-	2.80	18.77	23.01	-4.24
	5260	52	AVG	20.00	19.76	19.89	23.98	-3.98	1.90	21.90	30.00	-8.10
	5300	60	AVG	19.82	19.78	19.88	23.98	-4.16	1.90	21.72	30.00	-8.28
	5320	64	AVG	16.57	16.57	16.50	23.98	-7.41	1.90	18.47	30.00	-11.53
	5500	100	AVG	15.00	15.12	14.93	23.98	-8.86	3.60	18.72	30.00	-11.28
	5520	104	AVG	18.99	18.92	18.00	23.98	-4.99	3.60	22.59	30.00	-7.41
	5540	108	AVG	19.95	19.85	19.84	23.98	-4.03	3.60	23.55	30.00	-6.45
	5580	116	AVG	19.87	19.82	19.83	23.98	-4.11	3.60	23.47	30.00	-6.53
	5660	132	AVG	19.81	19.92	19.83	23.98	-4.06	3.60	23.52	30.00	-6.48
	5680	136	AVG	17.97	17.86	17.90	23.98	-6.01	3.60	21.57	30.00	-8.43
	5700	140	AVG	12.60	12.88	12.93	23.98	-11.10	3.60	16.48	30.00	-13.52
	5720	144	AVG	19.82	19.82	19.82	23.98	-4.16	3.60	23.42	30.00	-6.58
	5745	149	AVG	20.33	20.50	20.30	30.00	-9.50	3.20	23.70	-	-
	5785	157	AVG	20.43	20.45	20.31	30.00	-9.55	3.20	23.65	-	-
	5825	165	AVG	20.32	20.50	20.50	30.00	-9.50	3.20	23.70	-	-

Table 7-31. ISSED Antenna 3c 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11n	802.11ax						
	5190	38	AVG	16.42	15.54	-	-	2.80	19.22	23.01	-3.79
	5230	46	AVG	18.35	18.43	-	-	2.80	21.15	23.01	-1.86
	5270	54	AVG	19.39	19.43	23.98	-4.59	1.90	21.29	30.00	-8.71
	5310	62	AVG	14.83	13.89	23.98	-9.15	1.90	16.73	30.00	-13.27
	5510	102	AVG	14.85	14.40	23.98	-9.13	3.60	18.45	30.00	-11.55
	5550	110	AVG	19.35	19.43	23.98	-4.63	3.60	22.95	30.00	-7.05
	5670	134	AVG	17.99	16.75	23.98	-5.99	3.60	21.59	30.00	-8.41
	5710	142	AVG	19.34	19.22	23.98	-4.64	3.60	22.94	30.00	-7.06
	5755	151	AVG	19.40	19.44	30.00	-10.60	3.20	22.60	-	-
	5795	159	AVG	19.43	19.40	30.00	-10.57	3.20	22.63	-	-

Table 7-32. ISSED Antenna 3c 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11n	802.11ax						
	5190	38	AVG	14.92	15.00	-	-	2.80	17.72	23.01	-5.29
	5230	46	AVG	18.42	18.38	-	-	2.80	21.22	23.01	-1.79
	5270	54	AVG	19.48	19.27	23.98	-4.50	1.90	21.38	30.00	-8.62
	5310	62	AVG	13.80	14.00	23.98	-10.18	1.90	15.70	30.00	-14.30
	5510	102	AVG	14.19	13.88	23.98	-9.79	3.60	17.79	30.00	-12.21
	5550	110	AVG	19.40	19.12	23.98	-4.58	3.60	23.00	30.00	-7.00
	5670	134	AVG	17.50	16.44	23.98	-6.48	3.60	21.10	30.00	-8.90
	5710	142	AVG	19.43	19.50	23.98	-4.55	3.60	23.03	30.00	-6.97
	5755	151	AVG	19.35	19.37	30.00	-10.65	3.20	22.55	-	-
	5795	159	AVG	19.44	19.36	30.00	-10.56	3.20	22.64	-	-

Table 7-33. ISSED Antenna 3c 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 75 of 534

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11n	802.11ax						
	5190	38	AVG	13.59	13.68	-	-	2.80	16.39	23.01	-6.62
	5230	46	AVG	18.44	18.49	-	-	2.80	21.24	23.01	-1.77
	5270	54	AVG	19.42	19.50	23.98	-4.56	1.90	21.32	30.00	-8.68
	5310	62	AVG	13.70	13.47	23.98	-10.28	1.90	15.60	30.00	-14.40
	5510	102	AVG	12.84	12.24	23.98	-11.14	3.60	16.44	30.00	-13.56
	5550	110	AVG	18.32	17.95	23.98	-5.66	3.60	21.92	30.00	-8.08
	5670	134	AVG	15.43	14.83	23.98	-8.55	3.60	19.03	30.00	-10.97
	5710	142	AVG	19.36	19.50	23.98	-4.62	3.60	22.96	30.00	-7.04
	5755	151	AVG	19.35	19.21	30.00	-10.65	3.20	22.55	-	-
	5795	159	AVG	19.36	19.47	30.00	-10.64	3.20	22.56	-	-

Table 7-34. ISED Antenna 3c 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11ac	802.11ax						
	5210	42	AVG	15.11	14.31	-	-	2.80	17.91	23.01	-5.10
	5290	58	AVG	12.35	12.93	23.98	-11.63	1.90	14.25	30.00	-15.75
	5530	106	AVG	14.42	13.25	23.98	-9.56	3.60	18.02	30.00	-11.98
	5690	138	AVG	19.74	19.78	23.98	-4.24	3.60	23.34	30.00	-6.66
	5775	155	AVG	18.89	18.13	30.00	-11.11	3.20	22.09	-	-

Table 7-35. ISED Antenna 3c 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11ac	802.11ax						
	5210	42	AVG	14.73	14.24	-	-	2.80	17.53	23.01	-5.48
	5290	58	AVG	12.47	11.98	23.98	-11.51	1.90	14.37	30.00	-15.63
	5530	106	AVG	13.55	12.70	23.98	-10.43	3.60	17.15	30.00	-12.85
	5690	138	AVG	19.98	20.00	23.98	-4.00	3.60	23.58	30.00	-6.42
	5775	155	AVG	17.70	17.22	30.00	-12.30	3.20	20.90	-	-

Table 7-36. ISED Antenna 3c 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11ac	802.11ax						
	5210	42	AVG	14.44	13.97	-	-	2.80	17.24	23.01	-5.77
	5290	58	AVG	11.95	11.82	23.98	-12.03	1.90	13.85	30.00	-16.15
	5530	106	AVG	12.87	12.26	23.98	-11.11	3.60	16.47	30.00	-13.53
	5690	138	AVG	19.75	19.83	23.98	-4.23	3.60	23.35	30.00	-6.65
	5775	155	AVG	17.33	17.18	30.00	-12.67	3.20	20.53	-	-

Table 7-37. ISED Antenna 3c 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 76 of 534

7.4.3 FCC Antenna 3a Conducted Output Power Measurements

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11a	802.11n	802.11ax		
	5180	36	AVG	17.98	17.81	17.33	23.98	-6.00
	5200	40	AVG	19.88	19.78	19.87	23.98	-4.10
	5240	48	AVG	19.87	20.00	19.97	23.98	-3.98
	5260	52	AVG	19.91	19.98	19.96	23.98	-4.00
	5300	60	AVG	19.89	19.72	19.70	23.98	-4.09
	5320	64	AVG	18.41	18.38	18.47	23.98	-5.57
	5500	100	AVG	18.33	18.29	17.47	23.98	-5.65
	5520	104	AVG	19.90	19.88	18.82	23.98	-4.08
	5580	116	AVG	19.77	19.98	19.98	23.98	-4.00
	5660	132	AVG	19.85	19.91	19.91	23.98	-4.07
	5680	136	AVG	19.30	19.38	18.71	23.98	-4.60
	5700	140	AVG	16.49	16.31	15.47	23.98	-7.49
	5720	144	AVG	19.85	19.89	19.82	23.98	-4.09
	5745	149	AVG	20.44	20.47	20.28	30.00	-9.53
	5785	157	AVG	20.37	20.43	20.48	30.00	-9.57
	5825	165	AVG	20.48	20.49	20.44	30.00	-9.51

Table 7-38. FCC Antenna 3a 20MHz BW (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11a	802.11n	802.11ax		
	5180	36	AVG	16.67	16.54	16.50	23.98	-7.31
	5200	40	AVG	19.79	19.82	19.94	23.98	-4.16
	5240	48	AVG	19.87	19.91	19.96	23.98	-4.07
	5260	52	AVG	19.82	19.77	19.96	23.98	-4.16
	5300	60	AVG	19.90	19.94	19.85	23.98	-4.04
	5320	64	AVG	17.48	17.69	17.45	23.98	-6.29
	5500	100	AVG	16.98	16.74	16.48	23.98	-7.00
	5520	104	AVG	19.42	19.37	18.86	23.98	-4.56
	5540	108	AVG	19.91	19.87	19.91	23.98	-4.07
	5580	116	AVG	19.92	19.72	19.97	23.98	-4.06
	5660	132	AVG	19.96	19.96	19.95	23.98	-4.02
	5680	136	AVG	18.88	18.89	18.20	23.98	-5.09
	5700	140	AVG	15.18	15.20	14.62	23.98	-8.78
	5720	144	AVG	19.80	19.99	19.95	23.98	-3.99
	5745	149	AVG	20.41	20.47	20.25	30.00	-9.53
	5785	157	AVG	20.48	20.35	20.50	30.00	-9.52
	5825	165	AVG	20.43	20.50	20.43	30.00	-9.50

Table 7-39. FCC Antenna 3a 20MHz BW (UNII) Maximum Conducted Output Power (Mid Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 77 of 534

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11a	802.11n	802.11ax		
	5180	36	AVG	16.24	16.09	15.71	23.98	-7.74
	5200	40	AVG	19.99	20.00	19.84	23.98	-3.98
	5240	48	AVG	19.80	19.90	19.73	23.98	-4.08
	5260	52	AVG	20.00	19.85	19.83	23.98	-3.98
	5300	60	AVG	19.90	19.88	19.91	23.98	-4.08
	5320	64	AVG	16.60	16.66	16.34	23.98	-7.32
	5500	100	AVG	15.16	15.23	14.97	23.98	-8.75
	5520	104	AVG	18.70	18.86	17.98	23.98	-5.12
	5540	108	AVG	19.90	19.96	19.94	23.98	-4.02
	5580	116	AVG	19.87	19.85	19.80	23.98	-4.11
	5660	132	AVG	19.86	19.99	19.86	23.98	-3.99
	5680	136	AVG	17.88	17.82	17.89	23.98	-6.10
	5700	140	AVG	12.98	12.81	12.82	23.98	-11.00
	5720	144	AVG	19.86	19.88	19.85	23.98	-4.10
	5745	149	AVG	20.40	20.40	20.44	30.00	-9.60
	5785	157	AVG	20.27	20.22	20.45	30.00	-9.73
	5825	165	AVG	20.22	20.17	20.41	30.00	-9.78

Table 7-40. FCC Antenna 3a 20MHz BW (UNII) Maximum Conducted Output Power (High Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11n	802.11ax		
	5190	38	AVG	16.34	15.69	23.98	-7.64
	5230	46	AVG	19.44	19.42	23.98	-4.54
	5270	54	AVG	19.44	19.42	23.98	-4.54
	5310	62	AVG	15.00	13.79	23.98	-8.98
	5510	102	AVG	14.99	14.26	23.98	-8.99
	5550	110	AVG	19.47	19.40	23.98	-4.51
	5630	126	AVG	19.38	19.34	23.98	-4.60
	5670	134	AVG	17.95	16.96	23.98	-6.03
	5710	142	AVG	19.35	19.23	23.98	-4.63
	5755	151	AVG	19.39	19.44	30.00	-10.61
	5795	159	AVG	19.39	19.38	30.00	-10.61

Table 7-41. FCC Antenna 3a 40MHz BW (UNII) Maximum Conducted Output Power (Low Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 78 of 534

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11n	802.11ax		
	5190	38	AVG	14.85	14.99	23.98	-9.13
	5230	46	AVG	19.41	19.33	23.98	-4.57
	5270	54	AVG	19.42	19.37	23.98	-4.56
	5310	62	AVG	13.89	14.00	23.98	-10.09
	5510	102	AVG	14.08	13.96	23.98	-9.90
	5550	110	AVG	19.43	19.11	23.98	-4.55
	5630	126	AVG	19.43	19.46	23.98	-4.55
	5670	134	AVG	17.50	16.45	23.98	-6.48
	5710	142	AVG	19.47	19.32	23.98	-4.51
	5755	151	AVG	19.33	19.34	30.00	-10.67
	5795	159	AVG	19.40	19.34	30.00	-10.60

Table 7-42. FCC Antenna 3a 40MHz BW (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11n	802.11ax		
	5190	38	AVG	13.55	13.71	23.98	-10.43
	5230	46	AVG	19.46	18.91	23.98	-4.52
	5270	54	AVG	19.49	19.47	23.98	-4.49
	5310	62	AVG	13.93	13.31	23.98	-10.05
	5510	102	AVG	12.84	12.36	23.98	-11.14
	5550	110	AVG	18.25	17.74	23.98	-5.73
	5590	118	AVG	19.39	19.44	23.98	-4.59
	5630	126	AVG	19.22	18.97	23.98	-4.76
	5670	134	AVG	15.47	14.95	23.98	-8.51
	5710	142	AVG	19.25	19.31	23.98	-4.73
	5755	151	AVG	19.23	19.33	30.00	-10.77
	5795	159	AVG	19.30	19.31	30.00	-10.70

Table 7-43. FCC Antenna 3a 40MHz BW (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 79 of 534

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11ac	802.11ax		
	5210	42	AVG	15.25	14.28	23.98	-8.73
	5290	58	AVG	12.44	12.79	23.98	-11.54
	5530	106	AVG	14.26	13.01	23.98	-9.72
	5610	122	AVG	19.36	18.47	23.98	-4.62
	5690	138	AVG	19.73	19.80	23.98	-4.25
	5775	155	AVG	18.88	17.98	30.00	-11.12

Table 7-44. FCC Antenna 3a 80MHz BW (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11ac	802.11ax		
	5210	42	AVG	14.58	14.15	23.98	-9.40
	5290	58	AVG	12.40	11.95	23.98	-11.58
	5530	106	AVG	13.54	12.98	23.98	-10.44
	5610	122	AVG	18.95	17.92	23.98	-5.03
	5690	138	AVG	19.94	19.94	23.98	-4.04
	5775	155	AVG	17.99	17.11	30.00	-12.01

Table 7-45. FCC Antenna 3a 80MHz BW (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11ac	802.11ax		
	5210	42	AVG	14.33	13.95	23.98	-9.65
	5290	58	AVG	11.83	11.97	23.98	-12.15
	5530	106	AVG	12.87	12.49	23.98	-11.11
	5610	122	AVG	17.74	16.88	23.98	-6.24
	5690	138	AVG	19.86	19.99	23.98	-4.12
	5775	155	AVG	17.43	17.05	30.00	-12.57

Table 7-46. FCC Antenna 3a 80MHz BW (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 80 of 534

7.4.4 ISED Antenna 3a Conducted Output Power Measurements

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11n	802.11ax						
	5180	36	AVG	15.99	15.92	15.89	-	-	0.40	16.39	23.01	-6.62
	5200	40	AVG	16.00	15.91	15.88	-	-	0.40	16.40	23.01	-6.61
	5240	48	AVG	15.96	15.90	15.97	-	-	0.40	16.36	23.01	-6.65
	5260	52	AVG	19.91	19.98	19.96	23.98	-4.00	1.20	21.18	30.00	-8.82
	5300	60	AVG	19.89	19.72	19.70	23.98	-4.09	1.20	21.09	30.00	-8.91
	5320	64	AVG	18.41	18.38	18.47	23.98	-5.57	1.20	19.61	30.00	-10.39
	5500	100	AVG	18.33	18.29	17.47	23.98	-5.65	2.20	20.53	30.00	-9.47
	5520	104	AVG	19.90	19.88	18.82	23.98	-4.08	2.20	22.10	30.00	-7.90
	5580	116	AVG	19.77	19.98	19.98	23.98	-4.00	2.20	22.18	30.00	-7.82
	5660	132	AVG	19.85	19.91	19.91	23.98	-4.07	2.20	22.11	30.00	-7.89
	5680	136	AVG	19.30	19.38	18.71	23.98	-4.60	2.20	21.58	30.00	-8.42
	5700	140	AVG	16.49	16.31	15.47	23.98	-7.49	2.20	18.69	30.00	-11.31
	5720	144	AVG	19.85	19.89	19.82	23.98	-4.09	2.20	22.09	30.00	-7.91
	5745	149	AVG	20.44	20.47	20.28	30.00	-9.53	1.30	21.77	-	-
	5785	157	AVG	20.37	20.43	20.48	30.00	-9.57	1.30	21.73	-	-
	5825	165	AVG	20.48	20.49	20.44	30.00	-9.51	1.30	21.79	-	-

Table 7-47. ISED Antenna 3a 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11n	802.11ax						
	5180	36	AVG	15.93	15.94	15.93	-	-	0.40	16.34	23.01	-6.67
	5200	40	AVG	15.97	15.90	15.96	-	-	0.40	16.37	23.01	-6.64
	5240	48	AVG	15.91	15.92	16.00	-	-	0.40	16.32	23.01	-6.69
	5260	52	AVG	19.82	19.77	19.96	23.98	-4.16	1.20	21.02	30.00	-8.98
	5300	60	AVG	19.90	19.94	19.85	23.98	-4.04	1.20	21.14	30.00	-8.86
	5320	64	AVG	17.48	17.69	17.45	23.98	-6.29	1.20	18.89	30.00	-11.11
	5500	100	AVG	16.98	16.74	16.48	23.98	-7.00	2.20	19.18	30.00	-10.82
	5520	104	AVG	19.42	19.37	18.86	23.98	-4.56	2.20	21.62	30.00	-8.38
	5540	108	AVG	19.91	19.87	19.91	23.98	-4.07	2.20	22.11	30.00	-7.89
	5580	116	AVG	19.92	19.72	19.97	23.98	-4.06	2.20	22.12	30.00	-7.88
	5660	132	AVG	19.96	19.96	19.95	23.98	-4.02	2.20	22.16	30.00	-7.84
	5680	136	AVG	18.88	18.89	18.20	23.98	-5.09	2.20	21.09	30.00	-8.91
	5700	140	AVG	15.18	15.20	14.62	23.98	-8.78	2.20	17.40	30.00	-12.60
	5720	144	AVG	19.80	19.99	19.95	23.98	-3.99	2.20	22.19	30.00	-7.81
	5745	149	AVG	20.41	20.47	20.25	30.00	-9.53	1.30	21.77	-	-
	5785	157	AVG	20.48	20.35	20.50	30.00	-9.52	1.30	21.78	-	-
	5825	165	AVG	20.43	20.50	20.43	30.00	-9.50	1.30	21.80	-	-

Table 7-48. ISED Antenna 3a 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 81 of 534

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11n	802.11ax						
	5180	36	AVG	15.92	15.87	15.85	-	-	0.40	16.32	23.01	-6.69
	5200	40	AVG	15.94	16.00	15.85	-	-	0.40	16.40	23.01	-6.61
	5240	48	AVG	16.00	15.97	15.91	-	-	0.40	16.40	23.01	-6.61
	5260	52	AVG	20.00	19.85	19.83	23.98	-3.98	1.20	21.20	30.00	-8.80
	5300	60	AVG	19.90	19.88	19.91	23.98	-4.08	1.20	21.10	30.00	-8.90
	5320	64	AVG	16.60	16.66	16.34	23.98	-7.32	1.20	17.86	30.00	-12.14
	5500	100	AVG	15.16	15.23	14.97	23.98	-8.75	2.20	17.43	30.00	-12.57
	5520	104	AVG	18.70	18.86	17.98	23.98	-5.12	2.20	21.06	30.00	-8.94
	5540	108	AVG	19.90	19.96	19.94	23.98	-4.02	2.20	22.16	30.00	-7.84
	5580	116	AVG	19.87	19.85	19.80	23.98	-4.11	2.20	22.07	30.00	-7.93
	5660	132	AVG	19.86	19.99	19.86	23.98	-3.99	2.20	22.19	30.00	-7.81
	5680	136	AVG	17.88	17.82	17.89	23.98	-6.10	2.20	20.08	30.00	-9.92
	5700	140	AVG	12.98	12.81	12.82	23.98	-11.00	2.20	15.18	30.00	-14.82
	5720	144	AVG	19.86	19.88	19.85	23.98	-4.10	2.20	22.08	30.00	-7.92
	5745	149	AVG	20.40	20.40	20.44	30.00	-9.60	1.30	21.70	-	-
	5785	157	AVG	20.27	20.22	20.45	30.00	-9.73	1.30	21.57	-	-
	5825	165	AVG	20.22	20.17	20.41	30.00	-9.78	1.30	21.52	-	-

Table 7-49. ISED Antenna 3a 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11n	802.11ax						
	5190	38	AVG	16.34	15.69	-	-	0.40	16.74	23.01	-6.27
	5230	46	AVG	18.42	18.41	-	-	0.40	18.82	23.01	-4.19
	5270	54	AVG	19.44	19.42	23.98	-4.54	1.20	20.64	30.00	-9.36
	5310	62	AVG	15.00	13.79	23.98	-8.98	1.20	16.20	30.00	-13.80
	5510	102	AVG	14.99	14.26	23.98	-8.99	2.20	17.19	30.00	-12.81
	5550	110	AVG	19.47	19.40	23.98	-4.51	2.20	21.67	30.00	-8.33
	5670	134	AVG	17.95	16.96	23.98	-6.03	2.20	20.15	30.00	-9.85
	5710	142	AVG	19.35	19.23	23.98	-4.63	2.20	21.55	30.00	-8.45
	5755	151	AVG	19.39	19.44	30.00	-10.61	1.30	20.69	-	-
	5795	159	AVG	19.39	19.38	30.00	-10.61	1.30	20.69	-	-

Table 7-50. ISED Antenna 3a 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11n	802.11ax						
	5190	38	AVG	14.85	14.99	-	-	0.40	15.25	23.01	-7.76
	5230	46	AVG	18.47	18.49	-	-	0.40	18.87	23.01	-4.14
	5270	54	AVG	19.42	19.37	23.98	-4.56	1.20	20.62	30.00	-9.38
	5310	62	AVG	13.89	14.00	23.98	-10.09	1.20	15.09	30.00	-14.91
	5510	102	AVG	14.08	13.96	23.98	-9.90	2.20	16.28	30.00	-13.72
	5550	110	AVG	19.43	19.11	23.98	-4.55	2.20	21.63	30.00	-8.37
	5670	134	AVG	17.50	16.45	23.98	-6.48	2.20	19.70	30.00	-10.30
	5710	142	AVG	19.47	19.32	23.98	-4.51	2.20	21.67	30.00	-8.33
	5755	151	AVG	19.33	19.34	30.00	-10.67	1.30	20.63	-	-
	5795	159	AVG	19.40	19.34	30.00	-10.60	1.30	20.70	-	-

Table 7-51. ISED Antenna 3a 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 82 of 534

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11n	802.11ax						
	5190	38	AVG	13.55	13.71	-	-	0.40	13.95	23.01	-9.06
	5230	46	AVG	18.43	18.47	-	-	0.40	18.83	23.01	-4.18
	5270	54	AVG	19.49	19.47	23.98	-4.49	1.20	20.69	30.00	-9.31
	5310	62	AVG	13.93	13.31	23.98	-10.05	1.20	15.13	30.00	-14.87
	5510	102	AVG	12.84	12.36	23.98	-11.14	2.20	15.04	30.00	-14.96
	5550	110	AVG	18.25	17.74	23.98	-5.73	2.20	20.45	30.00	-9.55
	5670	134	AVG	15.47	14.95	23.98	-8.51	2.20	17.67	30.00	-12.33
	5710	142	AVG	19.25	19.31	23.98	-4.73	2.20	21.45	30.00	-8.55
	5755	151	AVG	19.23	19.33	30.00	-10.77	1.30	20.53	-	-
	5795	159	AVG	19.30	19.31	30.00	-10.70	1.30	20.60	-	-

Table 7-52. ISED Antenna 3a 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11ac	802.11ax						
	5210	42	AVG	15.25	14.28	-	-	0.40	15.65	23.01	-7.36
	5290	58	AVG	12.44	12.79	23.98	-11.54	1.20	13.64	30.00	-16.36
	5530	106	AVG	14.26	13.01	23.98	-9.72	2.20	16.46	30.00	-13.54
	5690	138	AVG	19.73	19.80	23.98	-4.25	2.20	21.93	30.00	-8.07
	5775	155	AVG	18.88	17.98	30.00	-11.12	1.30	20.18	-	-

Table 7-53. ISED Antenna 3a 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11ac	802.11ax						
	5210	42	AVG	14.58	14.15	-	-	0.40	14.98	23.01	-8.03
	5290	58	AVG	12.40	11.95	23.98	-11.58	1.20	13.60	30.00	-16.40
	5530	106	AVG	13.54	12.98	23.98	-10.44	2.20	15.74	30.00	-14.26
	5690	138	AVG	19.94	19.94	23.98	-4.04	2.20	22.14	30.00	-7.86
	5775	155	AVG	17.99	17.11	30.00	-12.01	1.30	19.29	-	-

Table 7-54. ISED Antenna 3a 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11ax						
	5210	42	AVG	13.95	-	-	0.40	14.73	23.01	-8.28
	5290	58	AVG	11.97	23.98	-12.15	1.20	13.03	30.00	-16.97
	5530	106	AVG	12.49	23.98	-11.11	2.20	15.07	30.00	-14.93
	5690	138	AVG	19.99	23.98	-4.12	2.20	22.06	30.00	-7.94
	5775	155	AVG	17.05	30.00	-12.57	1.30	18.73	-	-

Table 7-55. ISED Antenna 3a 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 83 of 534

7.4.5 FCC Antenna 1b Conducted Output Power Measurements

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11a	802.11n	802.11ax		
	5180	36	AVG	17.88	17.79	17.35	23.98	-6.10
	5200	40	AVG	19.87	19.94	19.97	23.98	-4.04
	5240	48	AVG	19.97	19.77	19.97	23.98	-4.01
	5260	52	AVG	19.84	19.78	19.95	23.98	-4.14
	5300	60	AVG	19.89	19.77	19.85	23.98	-4.09
	5320	64	AVG	18.46	18.40	18.42	23.98	-5.52
	5500	100	AVG	18.43	18.33	17.39	23.98	-5.55
	5520	104	AVG	19.95	19.78	18.94	23.98	-4.03
	5580	116	AVG	19.81	19.99	19.87	23.98	-3.99
	5660	132	AVG	19.95	19.82	19.90	23.98	-4.03
	5680	136	AVG	19.45	19.49	18.83	23.98	-4.49
	5700	140	AVG	16.46	16.29	15.35	23.98	-7.52
	5720	144	AVG	19.88	19.90	19.90	23.98	-4.08
	5745	149	AVG	20.36	20.45	20.37	30.00	-9.55
	5785	157	AVG	20.38	20.36	20.43	30.00	-9.62
	5825	165	AVG	20.30	20.46	20.38	30.00	-9.54

Table 7-56. FCC Antenna 1b 20MHz BW (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11a	802.11n	802.11ax		
	5180	36	AVG	16.71	16.57	16.38	23.98	-7.27
	5200	40	AVG	19.96	20.00	19.97	23.98	-3.98
	5240	48	AVG	19.97	19.98	19.97	23.98	-4.00
	5260	52	AVG	19.75	19.92	19.70	23.98	-4.06
	5300	60	AVG	19.70	19.87	20.00	23.98	-4.11
	5320	64	AVG	17.56	17.60	17.43	23.98	-6.38
	5500	100	AVG	16.94	17.00	16.42	23.98	-6.98
	5520	104	AVG	19.43	19.29	18.88	23.98	-4.55
	5540	108	AVG	19.73	19.73	19.94	23.98	-4.25
	5580	116	AVG	19.78	19.98	19.82	23.98	-4.00
	5660	132	AVG	19.75	19.73	19.90	23.98	-4.23
	5680	136	AVG	18.92	18.91	18.37	23.98	-5.06
	5700	140	AVG	15.03	15.03	14.71	23.98	-8.95
	5720	144	AVG	19.99	19.86	20.00	23.98	-3.99
	5745	149	AVG	20.40	20.49	20.38	30.00	-9.51
	5785	157	AVG	20.44	20.39	20.47	30.00	-9.56
	5825	165	AVG	20.40	20.33	20.27	30.00	-9.60

Table 7-57. FCC Antenna 1b 20MHz BW (UNII) Maximum Conducted Output Power (Mid Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 84 of 534

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11a	802.11n	802.11ax		
	5180	36	AVG	16.24	16.09	16.00	23.98	-7.74
	5200	40	AVG	19.85	19.88	19.77	23.98	-4.10
	5240	48	AVG	19.95	19.99	19.92	23.98	-3.99
	5260	52	AVG	19.95	19.87	19.96	23.98	-4.03
	5300	60	AVG	19.94	19.72	19.95	23.98	-4.04
	5320	64	AVG	16.62	16.56	16.43	23.98	-7.36
	5500	100	AVG	15.18	15.09	14.92	23.98	-8.80
	5520	104	AVG	18.97	18.98	17.96	23.98	-5.00
	5540	108	AVG	19.88	19.93	19.94	23.98	-4.05
	5580	116	AVG	19.94	19.84	19.78	23.98	-4.04
	5660	132	AVG	19.81	19.73	19.80	23.98	-4.17
	5680	136	AVG	17.75	17.84	17.70	23.98	-6.14
	5700	140	AVG	12.97	12.87	12.83	23.98	-11.01
	5720	144	AVG	19.83	19.72	19.78	23.98	-4.15
	5745	149	AVG	20.46	20.45	20.40	30.00	-9.54
	5785	157	AVG	20.28	20.47	20.30	30.00	-9.53
	5825	165	AVG	20.44	20.40	20.42	30.00	-9.56

Table 7-58. FCC Antenna 1b 20MHz BW (UNII) Maximum Conducted Output Power (High Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11n	802.11ax		
	5190	38	AVG	16.27	15.66	23.98	-7.71
	5230	46	AVG	19.42	19.27	23.98	-4.56
	5270	54	AVG	19.32	19.26	23.98	-4.66
	5310	62	AVG	14.79	13.78	23.98	-9.19
	5510	102	AVG	14.85	14.29	23.98	-9.13
	5550	110	AVG	19.25	19.32	23.98	-4.73
	5630	126	AVG	19.35	19.28	23.98	-4.63
	5670	134	AVG	17.93	16.95	23.98	-6.05
	5710	142	AVG	19.33	19.35	23.98	-4.65
	5755	151	AVG	19.33	19.34	30.00	-10.67
	5795	159	AVG	19.46	19.30	30.00	-10.54

Table 7-59. FCC Antenna 1b 40MHz BW (UNII) Maximum Conducted Output Power (Low Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 85 of 534

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11n	802.11ax		
	5190	38	AVG	14.90	14.99	23.98	-9.08
	5230	46	AVG	19.46	19.40	23.98	-4.52
	5270	54	AVG	19.48	19.50	23.98	-4.50
	5310	62	AVG	13.85	14.00	23.98	-10.13
	5510	102	AVG	14.17	13.85	23.98	-9.81
	5550	110	AVG	19.35	19.09	23.98	-4.63
	5630	126	AVG	19.27	19.34	23.98	-4.71
	5670	134	AVG	17.50	16.35	23.98	-6.48
	5710	142	AVG	19.48	19.35	23.98	-4.50
	5755	151	AVG	19.45	19.32	30.00	-10.55
	5795	159	AVG	19.38	19.40	30.00	-10.62

Table 7-60. FCC Antenna 1b 40MHz BW (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11n	802.11ax		
	5190	38	AVG	13.67	13.58	23.98	-10.31
	5230	46	AVG	19.49	18.94	23.98	-4.49
	5270	54	AVG	19.41	19.40	23.98	-4.57
	5310	62	AVG	14.00	13.40	23.98	-9.98
	5510	102	AVG	12.96	12.50	23.98	-11.02
	5550	110	AVG	18.41	17.95	23.98	-5.57
	5590	118	AVG	19.30	19.40	23.98	-4.68
	5630	126	AVG	19.20	18.99	23.98	-4.78
	5670	134	AVG	15.49	14.90	23.98	-8.49
	5710	142	AVG	19.48	19.43	23.98	-4.50
	5755	151	AVG	19.39	19.32	30.00	-10.61
	5795	159	AVG	19.39	19.39	30.00	-10.61

Table 7-61. FCC Antenna 1b 40MHz BW (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 86 of 534

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11ac	802.11ax		
	5210	42	AVG	15.02	14.46	23.98	-8.96
	5290	58	AVG	12.48	12.94	23.98	-11.50
	5530	106	AVG	14.43	13.06	23.98	-9.55
	5610	122	AVG	19.30	18.29	23.98	-4.68
	5690	138	AVG	19.94	19.83	23.98	-4.04
	5775	155	AVG	18.97	18.02	30.00	-11.03

Table 7-62. FCC Antenna 1b 80MHz BW (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11ac	802.11ax		
	5210	42	AVG	14.61	14.06	23.98	-9.37
	5290	58	AVG	12.30	12.00	23.98	-11.68
	5530	106	AVG	13.65	12.64	23.98	-10.33
	5610	122	AVG	18.93	17.95	23.98	-5.05
	5690	138	AVG	19.93	19.91	23.98	-4.05
	5775	155	AVG	17.93	17.08	30.00	-12.07

Table 7-63. FCC Antenna 1b 80MHz BW (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11ac	802.11ax		
	5210	42	AVG	14.37	13.99	23.98	-9.61
	5290	58	AVG	11.96	11.89	23.98	-12.02
	5530	106	AVG	12.88	12.25	23.98	-11.10
	5610	122	AVG	17.64	16.76	23.98	-6.34
	5690	138	AVG	19.85	19.99	23.98	-4.13
	5775	155	AVG	17.31	17.17	30.00	-12.69

Table 7-64. FCC Antenna 1b 80MHz BW (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 87 of 534

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.4.6 ISED Antenna 1b Conducted Output Power Measurements

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11n	802.11ax						
	5180	36	AVG	15.96	15.91	15.85	-	-	-1.40	14.56	23.01	-8.45
	5200	40	AVG	15.86	15.97	15.86	-	-	-1.40	14.57	23.01	-8.44
	5240	48	AVG	15.98	15.90	15.90	-	-	-1.40	14.58	23.01	-8.43
	5260	52	AVG	19.84	19.78	19.95	23.98	-4.14	-1.90	17.94	30.00	-12.06
	5300	60	AVG	19.89	19.77	19.85	23.98	-4.09	-1.90	17.99	30.00	-12.01
	5320	64	AVG	18.46	18.40	18.42	23.98	-5.52	-1.90	16.56	30.00	-13.44
	5500	100	AVG	18.43	18.33	17.39	23.98	-5.55	-1.10	17.33	30.00	-12.67
	5520	104	AVG	19.95	19.78	18.94	23.98	-4.03	-1.10	18.85	30.00	-11.15
	5580	116	AVG	19.81	19.99	19.87	23.98	-3.99	-1.10	18.89	30.00	-11.11
	5660	132	AVG	19.95	19.82	19.90	23.98	-4.03	-1.10	18.85	30.00	-11.15
	5680	136	AVG	19.45	19.49	18.83	23.98	-4.49	-1.10	18.39	30.00	-11.61
	5700	140	AVG	16.46	16.29	15.35	23.98	-7.52	-1.10	15.36	30.00	-14.64
	5720	144	AVG	19.88	19.90	19.90	23.98	-4.08	-1.10	18.80	30.00	-11.20
	5745	149	AVG	20.36	20.45	20.37	30.00	-9.55	-1.00	19.45	-	-
	5785	157	AVG	20.38	20.36	20.43	30.00	-9.62	-1.00	19.38	-	-
	5825	165	AVG	20.30	20.46	20.38	30.00	-9.54	-1.00	19.46	-	-

Table 7-65. ISED Antenna 1b 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11n	802.11ax						
	5180	36	AVG	15.97	15.87	16.00	-	-	-1.40	14.57	23.01	-8.44
	5200	40	AVG	15.99	15.86	15.89	-	-	-1.40	14.59	23.01	-8.42
	5240	48	AVG	15.85	15.87	15.91	-	-	-1.40	14.47	23.01	-8.54
	5260	52	AVG	19.75	19.92	19.70	23.98	-4.06	-1.90	18.02	30.00	-11.98
	5300	60	AVG	19.70	19.87	20.00	23.98	-4.11	-1.90	17.97	30.00	-12.03
	5320	64	AVG	17.56	17.60	17.43	23.98	-6.38	-1.90	15.70	30.00	-14.30
	5500	100	AVG	16.94	17.00	16.42	23.98	-6.98	-1.10	15.90	30.00	-14.10
	5520	104	AVG	19.43	19.29	18.88	23.98	-4.55	-1.10	18.33	30.00	-11.67
	5540	108	AVG	19.73	19.73	19.94	23.98	-4.25	-1.10	18.63	30.00	-11.37
	5580	116	AVG	19.78	19.98	19.82	23.98	-4.00	-1.10	18.88	30.00	-11.12
	5660	132	AVG	19.75	19.73	19.90	23.98	-4.23	-1.10	18.65	30.00	-11.35
	5680	136	AVG	18.92	18.91	18.37	23.98	-5.06	-1.10	17.82	30.00	-12.18
	5700	140	AVG	15.03	15.03	14.71	23.98	-8.95	-1.10	13.93	30.00	-16.07
	5720	144	AVG	19.99	19.86	20.00	23.98	-3.99	-1.10	18.89	30.00	-11.11
	5745	149	AVG	20.40	20.49	20.38	30.00	-9.51	-1.00	19.49	-	-
	5785	157	AVG	20.44	20.39	20.47	30.00	-9.56	-1.00	19.44	-	-
	5825	165	AVG	20.40	20.33	20.27	30.00	-9.60	-1.00	19.40	-	-

Table 7-66. ISED Antenna 1b 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 88 of 534

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11n	802.11ax						
	5180	36	AVG	15.87	15.94	15.99	-	-	-1.40	14.54	23.01	-8.47
	5200	40	AVG	15.87	15.86	15.86	-	-	-1.40	14.47	23.01	-8.54
	5240	48	AVG	15.96	15.85	15.90	-	-	-1.40	14.56	23.01	-8.45
	5260	52	AVG	19.95	19.87	19.96	23.98	-4.03	-1.90	18.05	30.00	-11.95
	5300	60	AVG	19.94	19.72	19.95	23.98	-4.04	-1.90	18.04	30.00	-11.96
	5320	64	AVG	16.62	16.56	16.43	23.98	-7.36	-1.90	14.72	30.00	-15.28
	5500	100	AVG	15.18	15.09	14.92	23.98	-8.80	-1.10	14.08	30.00	-15.92
	5520	104	AVG	18.97	18.98	17.96	23.98	-5.00	-1.10	17.88	30.00	-12.12
	5540	108	AVG	19.88	19.93	19.94	23.98	-4.05	-1.10	18.83	30.00	-11.17
	5580	116	AVG	19.94	19.84	19.78	23.98	-4.04	-1.10	18.84	30.00	-11.16
	5660	132	AVG	19.81	19.73	19.80	23.98	-4.17	-1.10	18.71	30.00	-11.29
	5680	136	AVG	17.75	17.84	17.70	23.98	-6.14	-1.10	16.74	30.00	-13.26
	5700	140	AVG	12.97	12.87	12.83	23.98	-11.01	-1.10	11.87	30.00	-18.13
	5720	144	AVG	19.83	19.72	19.78	23.98	-4.15	-1.10	18.73	30.00	-11.27
	5745	149	AVG	20.46	20.45	20.40	30.00	-9.54	-1.00	19.46	-	-
	5785	157	AVG	20.28	20.47	20.30	30.00	-9.53	-1.00	19.47	-	-
	5825	165	AVG	20.44	20.40	20.42	30.00	-9.56	-1.00	19.44	-	-

Table 7-67. ISSED Antenna 1b 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11n	802.11ax						
	5190	38	AVG	16.27	15.66	-	-	-1.40	14.87	23.01	-8.14
	5230	46	AVG	18.44	18.39	-	-	-1.40	17.04	23.01	-5.97
	5270	54	AVG	19.32	19.26	23.98	-4.66	-1.90	17.42	30.00	-12.58
	5310	62	AVG	14.79	13.78	23.98	-9.19	-1.90	12.89	30.00	-17.11
	5510	102	AVG	14.85	14.29	23.98	-9.13	-1.10	13.75	30.00	-16.25
	5550	110	AVG	19.25	19.32	23.98	-4.73	-1.10	18.15	30.00	-11.85
	5670	134	AVG	17.93	16.95	23.98	-6.05	-1.10	16.83	30.00	-13.17
	5710	142	AVG	19.33	19.35	23.98	-4.65	-1.10	18.23	30.00	-11.77
	5755	151	AVG	19.33	19.34	30.00	-10.67	-1.00	18.33	-	-
	5795	159	AVG	19.46	19.30	30.00	-10.54	-1.00	18.46	-	-

Table 7-68. ISSED Antenna 1b 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11n	802.11ax						
	5190	38	AVG	14.90	14.99	-	-	-1.40	13.50	23.01	-9.51
	5230	46	AVG	18.41	18.43	-	-	-1.40	17.01	23.01	-6.00
	5270	54	AVG	19.48	19.50	23.98	-4.50	-1.90	17.58	30.00	-12.42
	5310	62	AVG	13.85	14.00	23.98	-10.13	-1.90	11.95	30.00	-18.05
	5510	102	AVG	14.17	13.85	23.98	-9.81	-1.10	13.07	30.00	-16.93
	5550	110	AVG	19.35	19.09	23.98	-4.63	-1.10	18.25	30.00	-11.75
	5670	134	AVG	17.50	16.35	23.98	-6.48	-1.10	16.40	30.00	-13.60
	5710	142	AVG	19.48	19.35	23.98	-4.50	-1.10	18.38	30.00	-11.62
	5755	151	AVG	19.45	19.32	30.00	-10.55	-1.00	18.45	-	-
	5795	159	AVG	19.38	19.40	30.00	-10.62	-1.00	18.38	-	-

Table 7-69. ISSED Antenna 1b 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 89 of 534

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11n	802.11ax						
	5190	38	AVG	13.67	13.58	-	-	-1.40	12.27	23.01	-10.74
	5230	46	AVG	18.42	18.48	-	-	-1.40	17.02	23.01	-5.99
	5270	54	AVG	19.41	19.40	23.98	-4.57	-1.90	17.51	30.00	-12.49
	5310	62	AVG	14.00	13.40	23.98	-9.98	-1.90	12.10	30.00	-17.90
	5510	102	AVG	12.96	12.50	23.98	-11.02	-1.10	11.86	30.00	-18.14
	5550	110	AVG	18.41	17.95	23.98	-5.57	-1.10	17.31	30.00	-12.69
	5670	134	AVG	15.49	14.90	23.98	-8.49	-1.10	14.39	30.00	-15.61
	5710	142	AVG	19.48	19.43	23.98	-4.50	-1.10	18.38	30.00	-11.62
	5755	151	AVG	19.39	19.32	30.00	-10.61	-1.00	18.39	-	-
	5795	159	AVG	19.39	19.39	30.00	-10.61	-1.00	18.39	-	-

Table 7-70. ISED Antenna 1b 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11ac	802.11ax						
	5210	42	AVG	15.02	14.46	23.98	-8.96	-1.40	13.62	23.01	-9.39
	5290	58	AVG	12.48	12.94	23.98	-11.50	-1.90	10.58	30.00	-19.42
	5530	106	AVG	14.43	13.06	23.98	-9.55	-1.10	13.33	30.00	-16.67
	5690	138	AVG	19.94	19.83	23.98	-4.04	-1.10	18.84	30.00	-11.16
	5775	155	AVG	18.97	18.02	30.00	-11.03	-1.00	17.97	-	-

Table 7-71. ISED Antenna 1b 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11ac	802.11ax						
	5210	42	AVG	14.61	14.06	-	-	-1.40	13.21	23.01	-9.80
	5290	58	AVG	12.30	12.00	23.98	-11.68	-1.90	10.40	30.00	-19.60
	5530	106	AVG	13.65	12.64	23.98	-10.33	-1.10	12.55	30.00	-17.45
	5690	138	AVG	19.93	19.91	23.98	-4.05	-1.10	18.83	30.00	-11.17
	5775	155	AVG	17.93	17.08	30.00	-12.07	-1.00	16.93	-	-

Table 7-72. ISED Antenna 1b 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11ac	802.11ax						
	5210	42	AVG	14.37	13.99	-	-	-1.40	12.97	23.01	-10.04
	5290	58	AVG	11.96	11.89	23.98	-12.02	-1.90	10.06	30.00	-19.94
	5530	106	AVG	12.88	12.25	23.98	-11.10	-1.10	11.78	30.00	-18.22
	5690	138	AVG	19.85	19.99	23.98	-4.13	-1.10	18.75	30.00	-11.25
	5775	155	AVG	17.31	17.17	30.00	-12.69	-1.00	16.31	-	-

Table 7-73. ISED Antenna 1b 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 90 of 534

7.4.7 FCC CDD Primary Maximum Conducted Output Power Measurements

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 3a	Summed		
	5180	36	CDD	AVG	16.75	16.76	19.77	23.98	-4.21
	5200	40	CDD	AVG	16.91	16.90	19.92	23.98	-4.06
	5240	48	CDD	AVG	16.82	16.84	19.84	23.98	-4.14
	5260	52	CDD	AVG	16.85	16.94	19.91	23.98	-4.07
	5300	60	CDD	AVG	16.92	16.79	19.87	23.98	-4.11
	5320	64	CDD	AVG	15.91	15.97	18.95	23.98	-5.03
	5500	100	CDD	AVG	16.31	16.47	19.40	23.98	-4.58
	5520	104	CDD	AVG	16.86	16.78	19.83	23.98	-4.15
	5580	116	CDD	AVG	16.93	16.82	19.89	23.98	-4.09
	5680	136	CDD	AVG	16.77	16.91	19.85	23.98	-4.13
	5700	140	CDD	AVG	15.44	15.40	18.43	23.98	-5.55
	5720	144	CDD	AVG	16.86	16.90	19.89	23.98	-4.09
	5745	149	CDD	AVG	20.42	20.34	23.39	30.00	-6.61
	5785	157	CDD	AVG	20.41	20.35	23.39	30.00	-6.61
	5825	165	CDD	AVG	20.32	20.36	23.35	30.00	-6.65

Table 7-74. FCC CDD 20MHz BW 802.11a (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 3a	Summed		
	5180	36	CDD	AVG	16.28	16.31	19.31	23.98	-4.67
	5200	40	CDD	AVG	16.97	16.99	19.99	23.98	-3.99
	5240	48	CDD	AVG	16.90	16.99	19.96	23.98	-4.02
	5260	52	CDD	AVG	16.75	16.83	19.80	23.98	-4.18
	5300	60	CDD	AVG	16.81	16.92	19.88	23.98	-4.10
	5320	64	CDD	AVG	15.83	15.99	18.92	23.98	-5.06
	5500	100	CDD	AVG	15.85	15.78	18.83	23.98	-5.15
	5520	104	CDD	AVG	16.83	16.99	19.92	23.98	-4.06
	5580	116	CDD	AVG	16.85	16.86	19.87	23.98	-4.11
	5680	136	CDD	AVG	16.85	16.76	19.82	23.98	-4.16
	5700	140	CDD	AVG	14.34	14.37	17.37	23.98	-6.61
	5720	144	CDD	AVG	16.95	16.92	19.95	23.98	-4.03
	5745	149	CDD	AVG	20.44	20.48	23.47	30.00	-6.53
	5785	157	CDD	AVG	20.45	20.31	23.39	30.00	-6.61
	5825	165	CDD	AVG	20.32	20.30	23.32	30.00	-6.68

Table 7-75. FCC CDD 20MHz BW 802.11a (UNII) Maximum Conducted Output Power (Mid Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 91 of 534

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 3a	Summed		
	5180	36	CDD	AVG	15.80	15.77	18.80	23.98	-5.18
	5200	40	CDD	AVG	16.81	16.75	19.79	23.98	-4.19
	5240	48	CDD	AVG	16.91	16.92	19.93	23.98	-4.05
	5260	52	CDD	AVG	16.96	16.89	19.94	23.98	-4.04
	5300	60	CDD	AVG	16.86	16.94	19.91	23.98	-4.07
	5320	64	CDD	AVG	15.80	15.93	18.88	23.98	-5.10
	5500	100	CDD	AVG	14.37	14.31	17.35	23.98	-6.63
	5520	104	CDD	AVG	16.94	16.81	19.89	23.98	-4.09
	5540	108	CDD	AVG	16.79	16.86	19.84	23.98	-4.14
	5580	116	CDD	AVG	16.75	17.00	19.89	23.98	-4.09
	5660	132	CDD	AVG	17.00	16.94	19.98	23.98	-4.00
	5680	136	CDD	AVG	15.80	15.85	18.84	23.98	-5.14
	5700	140	CDD	AVG	11.92	11.85	14.90	23.98	-9.08
	5720	144	CDD	AVG	16.80	16.82	19.82	23.98	-4.16
	5745	149	CDD	AVG	20.33	20.47	23.41	30.00	-6.59
	5785	157	CDD	AVG	20.36	20.30	23.34	30.00	-6.66
	5825	165	CDD	AVG	20.39	20.27	23.34	30.00	-6.66

Table 7-76. FCC CDD 20MHz BW 802.11a (UNII) Maximum Conducted Output Power (High Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 3a	Summed		
	5180	36	CDD	AVG	16.95	16.94	19.96	23.98	-4.02
	5200	40	CDD	AVG	16.78	16.82	19.81	23.98	-4.17
	5240	48	CDD	AVG	16.84	16.98	19.92	23.98	-4.06
	5260	52	CDD	AVG	16.86	16.81	19.85	23.98	-4.13
	5300	60	CDD	AVG	16.95	16.89	19.93	23.98	-4.05
	5320	64	CDD	AVG	15.89	15.86	18.89	23.98	-5.09
	5500	100	CDD	AVG	16.48	16.35	19.43	23.98	-4.55
	5520	104	CDD	AVG	16.78	16.82	19.81	23.98	-4.17
	5580	116	CDD	AVG	16.85	16.97	19.92	23.98	-4.06
	5680	136	CDD	AVG	16.82	16.99	19.92	23.98	-4.06
	5700	140	CDD	AVG	15.44	15.38	18.42	23.98	-5.56
	5720	144	CDD	AVG	16.77	16.93	19.86	23.98	-4.12
	5745	149	CDD	AVG	20.38	20.36	23.38	30.00	-6.62
	5785	157	CDD	AVG	20.39	20.25	23.33	30.00	-6.67
	5825	165	CDD	AVG	20.31	20.27	23.30	30.00	-6.70

Table 7-77. FCC CDD 20MHz BW 802.11n (UNII) Maximum Conducted Output Power (Low Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 92 of 534

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 3a	Summed		
	5180	36	CDD	AVG	16.31	16.30	19.32	23.98	-4.66
	5200	40	CDD	AVG	16.90	16.79	19.86	23.98	-4.12
	5240	48	CDD	AVG	16.75	17.00	19.89	23.98	-4.09
	5260	52	CDD	AVG	16.79	16.76	19.79	23.98	-4.19
	5300	60	CDD	AVG	16.82	16.99	19.92	23.98	-4.06
	5320	64	CDD	AVG	15.93	15.98	18.97	23.98	-5.01
	5500	100	CDD	AVG	15.97	15.90	18.95	23.98	-5.03
	5520	104	CDD	AVG	16.90	16.96	19.94	23.98	-4.04
	5580	116	CDD	AVG	16.71	16.87	19.80	23.98	-4.18
	5680	136	CDD	AVG	16.79	16.87	19.84	23.98	-4.14
	5700	140	CDD	AVG	14.29	14.48	17.40	23.98	-6.58
	5720	144	CDD	AVG	17.00	16.97	20.00	23.98	-3.98
	5745	149	CDD	AVG	20.29	20.46	23.39	30.00	-6.61
	5785	157	CDD	AVG	20.33	20.22	23.29	30.00	-6.71
	5825	165	CDD	AVG	20.46	20.50	23.49	30.00	-6.51

Table 7-78. FCC CDD 20MHz BW 802.11n (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 3a	Summed		
	5180	36	CDD	AVG	15.86	15.98	18.93	23.98	-5.05
	5200	40	CDD	AVG	16.86	16.98	19.93	23.98	-4.05
	5240	48	CDD	AVG	16.87	16.90	19.90	23.98	-4.08
	5260	52	CDD	AVG	16.82	16.68	19.76	23.98	-4.22
	5300	60	CDD	AVG	16.94	16.99	19.98	23.98	-4.00
	5320	64	CDD	AVG	15.91	16.00	18.97	23.98	-5.01
	5500	100	CDD	AVG	14.44	14.45	17.46	23.98	-6.52
	5520	104	CDD	AVG	16.83	16.83	19.84	23.98	-4.14
	5540	108	CDD	AVG	16.84	16.79	19.83	23.98	-4.15
	5580	116	CDD	AVG	16.94	16.98	19.97	23.98	-4.01
	5660	132	CDD	AVG	16.97	16.95	19.97	23.98	-4.01
	5680	136	CDD	AVG	15.74	15.73	18.75	23.98	-5.23
	5700	140	CDD	AVG	11.80	11.98	14.90	23.98	-9.08
	5720	144	CDD	AVG	16.83	16.93	19.89	23.98	-4.09
	5745	149	CDD	AVG	20.38	20.44	23.42	30.00	-6.58
	5785	157	CDD	AVG	20.43	20.46	23.46	30.00	-6.54
	5825	165	CDD	AVG	20.46	20.28	23.38	30.00	-6.62

Table 7-79. FCC CDD 20MHz BW 802.11n (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 93 of 534

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 3a	Summed		
	5180	36	CDD	AVG	15.95	15.76	18.87	23.98	-5.11
	5200	40	CDD	AVG	16.76	16.91	19.85	23.98	-4.13
	5240	48	CDD	AVG	16.75	16.86	19.82	23.98	-4.16
	5260	52	CDD	AVG	16.85	16.96	19.92	23.98	-4.06
	5300	60	CDD	AVG	16.80	16.85	19.84	23.98	-4.14
	5320	64	CDD	AVG	15.89	15.92	18.92	23.98	-5.06
	5500	100	CDD	AVG	16.35	16.34	19.36	23.98	-4.62
	5520	104	CDD	AVG	16.87	16.94	19.92	23.98	-4.06
	5580	116	CDD	AVG	16.81	16.80	19.82	23.98	-4.16
	5680	136	CDD	AVG	16.77	16.87	19.83	23.98	-4.15
	5700	140	CDD	AVG	14.80	14.99	17.91	23.98	-6.07
	5720	144	CDD	AVG	16.98	16.83	19.92	23.98	-4.06
	5745	149	CDD	AVG	20.27	20.36	23.33	30.00	-6.67
	5785	157	CDD	AVG	20.42	20.45	23.45	30.00	-6.55
	5825	165	CDD	AVG	20.44	20.48	23.47	30.00	-6.53

Table 7-80. FCC CDD 20MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 3a	Summed		
	5180	36	CDD	AVG	15.74	15.90	18.83	23.98	-5.15
	5200	40	CDD	AVG	16.91	17.00	19.97	23.98	-4.01
	5240	48	CDD	AVG	16.90	16.84	19.88	23.98	-4.10
	5260	52	CDD	AVG	16.90	16.86	19.89	23.98	-4.09
	5300	60	CDD	AVG	16.76	16.83	19.81	23.98	-4.17
	5320	64	CDD	AVG	15.93	15.86	18.91	23.98	-5.07
	5500	100	CDD	AVG	15.99	15.82	18.92	23.98	-5.06
	5520	104	CDD	AVG	17.00	16.93	19.98	23.98	-4.00
	5580	116	CDD	AVG	16.83	16.96	19.91	23.98	-4.07
	5680	136	CDD	AVG	16.90	16.97	19.95	23.98	-4.03
	5700	140	CDD	AVG	13.99	13.82	16.92	23.98	-7.06
	5720	144	CDD	AVG	16.83	16.90	19.88	23.98	-4.10
	5745	149	CDD	AVG	20.38	20.39	23.40	30.00	-6.60
	5785	157	CDD	AVG	20.46	20.47	23.48	30.00	-6.52
	5825	165	CDD	AVG	20.41	20.42	23.43	30.00	-6.57

Table 7-81. FCC CDD 20MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (Mid Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 94 of 534

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 3a	Summed		
	5180	36	CDD	AVG	15.25	15.50	18.39	23.98	-5.59
	5200	40	CDD	AVG	16.87	16.84	19.87	23.98	-4.11
	5240	48	CDD	AVG	16.88	16.83	19.87	23.98	-4.11
	5260	52	CDD	AVG	16.80	16.91	19.87	23.98	-4.11
	5300	60	CDD	AVG	16.91	17.00	19.97	23.98	-4.01
	5320	64	CDD	AVG	15.86	15.97	18.93	23.98	-5.05
	5500	100	CDD	AVG	13.87	14.00	16.95	23.98	-7.03
	5520	104	CDD	AVG	16.86	16.92	19.90	23.98	-4.08
	5540	108	CDD	AVG	16.99	16.85	19.93	23.98	-4.05
	5580	116	CDD	AVG	16.83	16.90	19.88	23.98	-4.10
	5660	132	CDD	AVG	16.95	16.93	19.95	23.98	-4.03
	5680	136	CDD	AVG	15.95	16.00	18.99	23.98	-4.99
	5700	140	CDD	AVG	11.93	11.81	14.88	23.98	-9.10
	5720	144	CDD	AVG	16.82	16.96	19.90	23.98	-4.08
	5745	149	CDD	AVG	20.31	20.37	23.35	30.00	-6.65
	5785	157	CDD	AVG	20.50	20.38	23.45	30.00	-6.55
	5825	165	CDD	AVG	20.40	20.31	23.37	30.00	-6.63

Table 7-82. FCC CDD 20MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (High Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 3a	Summed		
	5190	38	CDD	AVG	14.27	14.31	17.30	23.98	-6.68
	5230	46	CDD	AVG	19.41	19.28	22.36	23.98	-1.62
	5270	54	CDD	AVG	19.45	19.49	22.48	23.98	-1.50
	5310	62	CDD	AVG	12.34	12.29	15.33	23.98	-8.65
	5510	102	CDD	AVG	12.79	12.80	15.81	23.98	-8.17
	5550	110	CDD	AVG	19.36	19.26	22.32	23.98	-1.66
	5630	126	CDD	AVG	19.48	19.46	22.48	23.98	-1.50
	5670	134	CDD	AVG	17.25	17.35	20.31	23.98	-3.67
	5710	142	CDD	AVG	19.31	19.32	22.33	23.98	-1.65
	5755	151	CDD	AVG	19.26	19.43	22.36	30.00	-7.64
	5795	159	CDD	AVG	19.45	19.39	22.43	30.00	-7.57

Table 7-83. FCC CDD 40MHz BW 802.11n (UNII) Maximum Conducted Output Power (Low Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 95 of 534

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 3a	Summed		
	5190	38	CDD	AVG	13.72	13.84	16.79	23.98	-7.19
	5230	46	CDD	AVG	19.46	19.40	22.44	23.98	-1.54
	5270	54	CDD	AVG	19.44	19.47	22.47	23.98	-1.51
	5310	62	CDD	AVG	13.79	13.99	16.90	23.98	-7.08
	5510	102	CDD	AVG	12.49	12.46	15.49	23.98	-8.49
	5550	110	CDD	AVG	17.90	17.98	20.95	23.98	-3.03
	5630	126	CDD	AVG	19.48	19.20	22.35	23.98	-1.63
	5670	134	CDD	AVG	16.16	16.16	19.17	23.98	-4.81
	5710	142	CDD	AVG	19.48	19.41	19.41	23.98	-4.57
	5755	151	CDD	AVG	19.33	19.40	22.38	30.00	-7.62
	5795	159	CDD	AVG	19.45	19.25	22.36	30.00	-7.64

Table 7-84. FCC CDD 40MHz BW 802.11n (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 3a	Summed		
	5190	38	CDD	AVG	13.72	13.69	16.72	23.98	-7.26
	5230	46	CDD	AVG	19.48	19.43	22.47	23.98	-1.51
	5270	54	CDD	AVG	19.38	19.43	22.42	23.98	-1.56
	5310	62	CDD	AVG	12.83	12.96	15.91	23.98	-8.07
	5510	102	CDD	AVG	11.15	11.25	14.21	23.98	-9.77
	5550	110	CDD	AVG	17.00	16.85	19.94	23.98	-4.04
	5590	118	CDD	AVG	19.37	19.18	22.29	23.98	-1.69
	5630	126	CDD	AVG	18.93	18.80	21.88	23.98	-2.10
	5670	134	CDD	AVG	14.31	14.15	17.24	23.98	-6.74
	5710	142	CDD	AVG	19.40	19.33	22.38	23.98	-1.60
	5755	151	CDD	AVG	19.43	19.48	22.47	30.00	-7.53
	5795	159	CDD	AVG	19.24	19.22	22.24	30.00	-7.76

Table 7-85. FCC CDD 40MHz BW 802.11n (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 96 of 534

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 3a	Summed		
	5190	38	CDD	AVG	13.45	13.48	16.48	23.98	-7.50
	5230	46	CDD	AVG	19.43	19.44	22.45	23.98	-1.53
	5270	54	CDD	AVG	19.27	19.36	22.33	23.98	-1.65
	5310	62	CDD	AVG	11.93	11.98	14.97	23.98	-9.01
	5510	102	CDD	AVG	12.92	12.83	15.89	23.98	-8.09
	5550	110	CDD	AVG	18.46	18.49	21.49	23.98	-2.49
	5630	126	CDD	AVG	19.45	19.27	22.37	23.98	-1.61
	5670	134	CDD	AVG	16.15	16.10	19.14	23.98	-4.84
	5710	142	CDD	AVG	19.49	19.46	22.49	23.98	-1.49
	5755	151	CDD	AVG	19.45	19.37	22.42	30.00	-7.58
	5795	159	CDD	AVG	19.47	19.25	22.37	30.00	-7.63

Table 7-86. FCC CDD 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 3a	Summed		
	5190	38	CDD	AVG	12.88	12.88	15.89	23.98	-8.09
	5230	46	CDD	AVG	18.83	18.94	21.90	23.98	-2.08
	5270	54	CDD	AVG	18.84	18.78	21.82	23.98	-2.16
	5310	62	CDD	AVG	11.34	11.41	14.39	23.98	-9.59
	5510	102	CDD	AVG	12.35	12.43	15.40	23.98	-8.58
	5550	110	CDD	AVG	17.94	17.86	20.91	23.98	-3.07
	5630	126	CDD	AVG	19.50	19.50	22.51	23.98	-1.47
	5670	134	CDD	AVG	15.66	16.00	18.84	23.98	-5.14
	5710	142	CDD	AVG	19.42	19.50	22.47	23.98	-1.51
	5755	151	CDD	AVG	19.34	19.44	22.40	30.00	-7.60
	5795	159	CDD	AVG	19.37	19.32	22.36	30.00	-7.64

Table 7-87. FCC CDD 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (Mid Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 97 of 534

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 3a	Summed		
	5190	38	CDD	AVG	12.48	12.37	15.44	23.98	-8.54
	5230	46	CDD	AVG	18.75	18.79	21.78	23.98	-2.20
	5270	54	CDD	AVG	19.00	18.91	21.97	23.98	-2.01
	5310	62	CDD	AVG	10.50	10.47	13.50	23.98	-10.48
	5510	102	CDD	AVG	11.83	12.00	14.93	23.98	-9.05
	5550	110	CDD	AVG	16.92	16.97	19.96	23.98	-4.02
	5590	118	CDD	AVG	19.48	19.50	22.50	23.98	-1.48
	5630	126	CDD	AVG	18.36	18.35	21.37	23.98	-2.61
	5670	134	CDD	AVG	13.79	13.75	16.78	23.98	-7.20
	5710	142	CDD	AVG	19.25	19.39	22.33	23.98	-1.65
	5755	151	CDD	AVG	19.42	19.30	22.37	30.00	-7.63
	5795	159	CDD	AVG	19.42	19.27	22.36	30.00	-7.64

Table 7-88. FCC CDD 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (High Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 3a	Summed		
	5210	42	CDD	AVG	13.84	13.88	16.87	23.98	-7.11
	5290	58	CDD	AVG	11.88	11.99	14.95	23.98	-9.03
	5530	106	CDD	AVG	12.37	12.39	15.39	23.98	-8.59
	5610	122	CDD	AVG	18.26	18.41	21.35	23.98	-2.63
	5690	138	CDD	AVG	19.75	19.93	22.85	23.98	-1.13
	5775	155	CDD	AVG	17.85	17.79	20.83	30.00	-9.17

Table 7-89. FCC CDD 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 3a	Summed		
	5210	42	CDD	AVG	13.30	13.37	16.35	23.98	-7.63
	5290	58	CDD	AVG	10.77	10.91	13.85	23.98	-10.13
	5530	106	CDD	AVG	11.79	11.98	14.90	23.98	-9.08
	5610	122	CDD	AVG	17.54	17.75	20.66	23.98	-3.32
	5690	138	CDD	AVG	19.90	19.82	22.87	23.98	-1.11
	5775	155	CDD	AVG	16.90	16.96	19.94	30.00	-10.06

Table 7-90. FCC CDD 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power (Mid Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 98 of 534

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 3a	Summed		
	5210	42	CDD	AVG	13.05	13.05	16.06	23.98	-7.92
	5290	58	CDD	AVG	10.04	10.18	13.12	23.98	-10.86
	5530	106	CDD	AVG	11.13	11.10	14.13	23.98	-9.85
	5610	122	CDD	AVG	16.59	16.62	19.62	23.98	-4.36
	5690	138	CDD	AVG	19.94	19.95	22.96	23.98	-1.02
	5775	155	CDD	AVG	16.50	16.49	19.51	30.00	-10.49

Table 7-91. FCC CDD 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power (High Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 3a	Summed		
	5210	42	CDD	AVG	13.36	13.35	16.37	23.98	-7.61
	5290	58	CDD	AVG	11.37	11.41	14.40	23.98	-9.58
	5530	106	CDD	AVG	11.33	11.25	14.30	23.98	-9.68
	5610	122	CDD	AVG	17.80	17.77	20.80	23.98	-3.18
	5690	138	CDD	AVG	19.93	19.91	22.93	23.98	-1.05
	5775	155	CDD	AVG	17.27	17.48	20.39	30.00	-9.61

Table 7-92. FCC CDD 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 3a	Summed		
	5210	42	CDD	AVG	12.85	12.86	15.87	23.98	-8.11
	5290	58	CDD	AVG	10.97	10.90	13.95	23.98	-10.03
	5530	106	CDD	AVG	10.82	10.86	13.85	23.98	-10.13
	5610	122	CDD	AVG	17.26	17.39	20.34	23.98	-3.64
	5690	138	CDD	AVG	19.91	19.90	22.92	23.98	-1.06
	5775	155	CDD	AVG	16.38	16.26	19.33	30.00	-10.67

Table 7-93. FCC CDD 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 3a	Summed		
	5210	42	CDD	AVG	12.48	12.50	15.50	23.98	-8.48
	5290	58	CDD	AVG	10.20	10.25	13.24	23.98	-10.74
	5530	106	CDD	AVG	10.00	9.93	12.98	23.98	-11.00
	5610	122	CDD	AVG	15.75	15.81	18.79	23.98	-5.19
	5690	138	CDD	AVG	19.75	19.80	22.79	23.98	-1.19
	5775	155	CDD	AVG	16.41	16.39	19.41	30.00	-10.59

Table 7-94. FCC CDD 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 99 of 534

7.4.8 ISED CDD/SDM Primary Maximum Conducted Output Power Measurements

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 3a	Summed						
	5180	36	CDD	AVG	11.25	11.22	14.25	-	-	4.69	18.94	23.01	-4.07
	5200	40	CDD	AVG	11.10	11.19	14.16	-	-	4.69	18.85	23.01	-4.16
	5240	48	CDD	AVG	11.12	11.20	14.17	-	-	4.69	18.86	23.01	-4.15
	5260	52	CDD	AVG	16.85	16.94	19.91	23.98	-4.07	4.57	24.48	30.00	-5.52
	5300	60	CDD	AVG	16.92	16.79	19.87	23.98	-4.11	4.57	24.44	30.00	-5.56
	5320	64	CDD	AVG	15.91	15.97	18.95	23.98	-5.03	4.57	23.52	30.00	-6.48
	5500	100	CDD	AVG	16.31	16.47	19.40	23.98	-4.58	5.94	25.34	30.00	-4.66
	5520	104	CDD	AVG	16.86	16.78	19.83	23.98	-4.15	5.94	25.77	30.00	-4.23
	5580	116	CDD	AVG	16.93	16.82	19.89	23.98	-4.09	5.94	25.83	30.00	-4.17
	5660	132	CDD	AVG	16.76	16.86	19.82	23.98	-4.16	5.94	25.76	30.00	-4.24
	5680	136	CDD	AVG	16.77	16.91	19.85	23.98	-4.13	5.94	25.79	30.00	-4.21
	5700	140	CDD	AVG	15.44	15.40	18.43	23.98	-5.55	5.94	24.37	30.00	-5.63
	5720	144	CDD	AVG	16.86	16.90	19.89	23.98	-4.09	5.94	25.83	30.00	-4.17
	5745	149	CDD	AVG	20.42	20.34	23.39	30.00	-6.61	5.31	28.70	-	-
	5785	157	CDD	AVG	20.41	20.35	23.39	30.00	-6.61	5.31	28.70	-	-
	5825	165	CDD	AVG	20.32	20.36	23.35	30.00	-6.65	5.31	28.66	-	-

Table 7-95. ISED CDD 20MHz BW 802.11a (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 3a	Summed						
	5180	36	CDD	AVG	11.22	11.14	14.19	-	-	4.69	18.88	23.01	-4.13
	5200	40	CDD	AVG	11.20	11.13	14.18	-	-	4.69	18.87	23.01	-4.14
	5240	48	CDD	AVG	11.22	11.24	14.24	-	-	4.69	18.93	23.01	-4.08
	5260	52	CDD	AVG	16.75	16.83	19.80	23.98	-4.18	4.57	24.37	30.00	-5.63
	5300	60	CDD	AVG	16.81	16.92	19.88	23.98	-4.10	4.57	24.45	30.00	-5.55
	5320	64	CDD	AVG	15.83	15.99	18.92	23.98	-5.06	4.57	23.49	30.00	-6.51
	5500	100	CDD	AVG	15.85	15.78	18.83	23.98	-5.15	5.94	24.77	30.00	-5.23
	5520	104	CDD	AVG	16.83	16.99	19.92	23.98	-4.06	5.94	25.86	30.00	-4.14
	5580	116	CDD	AVG	16.85	16.86	19.87	23.98	-4.11	5.94	25.81	30.00	-4.19
	5660	132	CDD	AVG	16.95	16.97	19.97	23.98	-4.01	5.94	25.91	30.00	-4.09
	5680	136	CDD	AVG	16.85	16.76	19.82	23.98	-4.16	5.94	25.76	30.00	-4.24
	5700	140	CDD	AVG	14.34	14.37	17.37	23.98	-6.61	5.94	23.31	30.00	-6.69
	5720	144	CDD	AVG	16.95	16.92	19.95	23.98	-4.03	5.94	25.89	30.00	-4.11
	5745	149	CDD	AVG	20.44	20.48	23.47	30.00	-6.53	5.31	28.78	-	-
	5785	157	CDD	AVG	20.45	20.31	23.39	30.00	-6.61	5.31	28.70	-	-
	5825	165	CDD	AVG	20.32	20.30	23.32	30.00	-6.68	5.31	28.63	-	-

Table 7-96. ISED CDD 20MHz BW 802.11a (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 3a	Summed						
	5180	36	CDD	AVG	11.24	11.21	14.24	-	-	4.69	18.93	23.01	-4.08
	5200	40	CDD	AVG	11.13	11.21	14.18	-	-	4.69	18.87	23.01	-4.14
	5240	48	CDD	AVG	11.20	11.14	14.18	-	-	4.69	18.87	23.01	-4.14
	5260	52	CDD	AVG	16.96	16.89	19.94	23.98	-4.04	4.57	24.51	30.00	-5.49
	5300	60	CDD	AVG	16.86	16.94	19.91	23.98	-4.07	4.57	24.48	30.00	-5.52
	5320	64	CDD	AVG	15.80	15.93	18.88	23.98	-5.10	4.57	23.45	30.00	-6.55
	5500	100	CDD	AVG	14.37	14.31	17.35	23.98	-6.63	5.94	23.29	30.00	-6.71
	5520	104	CDD	AVG	16.94	16.81	19.89	23.98	-4.09	5.94	25.83	30.00	-4.17
	5580	116	CDD	AVG	16.75	17.00	19.89	23.98	-4.09	5.94	25.83	30.00	-4.17
	5660	132	CDD	AVG	17.00	16.94	19.98	23.98	-4.00	5.94	25.92	30.00	-4.08
	5680	136	CDD	AVG	15.80	15.85	18.84	23.98	-5.14	5.94	24.78	30.00	-5.22
	5700	140	CDD	AVG	11.92	11.85	14.90	23.98	-9.08	5.94	20.84	30.00	-9.16
	5720	144	CDD	AVG	16.80	16.82	19.82	23.98	-4.16	5.94	25.76	30.00	-4.24
	5745	149	CDD	AVG	20.33	20.47	23.41	30.00	-6.59	5.31	28.72	-	-
	5785	157	CDD	AVG	20.36	20.30	23.34	30.00	-6.66	5.31	28.65	-	-
	5825	165	CDD	AVG	20.39	20.27	23.34	30.00	-6.66	5.31	28.65	-	-

Table 7-97. ISED CDD 20MHz BW 802.11a (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 100 of 534

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 3a	Summed						
	5180	36	SDM	AVG	13.89	13.92	16.92	-	-	1.76	18.68	23.01	-4.33
	5200	40	SDM	AVG	13.92	13.93	16.94	-	-	1.76	18.70	23.01	-4.31
	5240	48	SDM	AVG	13.90	13.87	16.90	-	-	1.76	18.66	23.01	-4.35
	5260	52	CDD	AVG	16.86	16.81	19.85	23.98	-4.13	4.57	24.42	30.00	-5.58
	5300	60	CDD	AVG	16.95	16.89	19.93	23.98	-4.05	4.57	24.50	30.00	-5.50
	5320	64	CDD	AVG	15.89	15.86	18.89	23.98	-5.09	4.57	23.46	30.00	-6.54
	5500	100	CDD	AVG	16.48	16.35	19.43	23.98	-4.55	5.94	25.37	30.00	-4.63
	5520	104	CDD	AVG	16.78	16.82	19.81	23.98	-4.17	5.94	25.75	30.00	-4.25
	5580	116	CDD	AVG	16.85	16.97	19.92	23.98	-4.06	5.94	25.86	30.00	-4.14
	5660	132	CDD	AVG	16.81	16.88	19.86	23.98	-4.12	5.94	25.80	30.00	-4.20
	5680	136	CDD	AVG	16.82	16.99	19.92	23.98	-4.06	5.94	25.86	30.00	-4.14
	5700	140	CDD	AVG	15.44	15.38	18.42	23.98	-5.56	5.94	24.36	30.00	-5.64
	5720	144	CDD	AVG	16.77	16.93	19.86	23.98	-4.12	5.94	25.80	30.00	-4.20
	5745	149	CDD	AVG	20.38	20.36	23.38	30.00	-6.62	5.31	28.69	-	-
	5785	157	CDD	AVG	20.39	20.25	23.33	30.00	-6.67	5.31	28.64	-	-
	5825	165	CDD	AVG	20.31	20.27	23.30	30.00	-6.70	5.31	28.61	-	-

Table 7-98. ISCED CDD/SDM 20MHz BW 802.11n (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 3a	Summed						
	5180	36	SDM	AVG	13.93	13.94	16.95	-	-	1.76	18.71	23.01	-4.30
	5200	40	SDM	AVG	13.88	13.92	16.91	-	-	1.76	18.67	23.01	-4.34
	5240	48	SDM	AVG	13.86	13.91	16.90	-	-	1.76	18.66	23.01	-4.35
	5260	52	CDD	AVG	16.79	16.76	19.79	23.98	-4.19	4.57	24.36	30.00	-5.64
	5300	60	CDD	AVG	16.82	16.99	19.92	23.98	-4.06	4.57	24.49	30.00	-5.51
	5320	64	CDD	AVG	15.93	15.98	18.97	23.98	-5.01	4.57	23.54	30.00	-6.46
	5500	100	CDD	AVG	15.97	15.90	18.95	23.98	-5.03	5.94	24.89	30.00	-5.11
	5520	104	CDD	AVG	16.90	16.96	19.94	23.98	-4.04	5.94	25.88	30.00	-4.12
	5580	116	CDD	AVG	16.71	16.87	19.80	23.98	-4.18	5.94	25.74	30.00	-4.26
	5660	132	CDD	AVG	16.89	16.81	19.86	23.98	-4.12	5.94	25.80	30.00	-4.20
	5680	136	CDD	AVG	16.79	16.87	19.84	23.98	-4.14	5.94	25.78	30.00	-4.22
	5700	140	CDD	AVG	14.29	14.48	17.40	23.98	-6.58	5.94	23.34	30.00	-6.66
	5720	144	CDD	AVG	17.00	16.97	20.00	23.98	-3.98	5.94	25.94	30.00	-4.06
	5745	149	CDD	AVG	20.29	20.46	23.39	30.00	-6.61	5.31	28.70	-	-
	5785	157	CDD	AVG	20.33	20.22	23.29	30.00	-6.71	5.31	28.60	-	-
	5825	165	CDD	AVG	20.46	20.50	23.49	30.00	-6.51	5.31	28.80	-	-

Table 7-99. ISCED CDD/SDM 20MHz BW 802.11n (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 3a	Summed						
	5180	36	SDM	AVG	13.98	13.92	16.96	-	-	1.76	18.72	23.01	-4.29
	5200	40	SDM	AVG	13.92	13.93	16.94	-	-	1.76	18.70	23.01	-4.31
	5240	48	SDM	AVG	13.97	13.92	16.96	-	-	1.76	18.72	23.01	-4.29
	5260	52	CDD	AVG	16.82	16.68	19.76	23.98	-4.22	4.57	24.33	30.00	-5.67
	5300	60	CDD	AVG	16.94	16.99	19.98	23.98	-4.00	4.57	24.55	30.00	-5.45
	5320	64	CDD	AVG	15.91	16.00	18.97	23.98	-5.01	4.57	23.54	30.00	-6.46
	5500	100	CDD	AVG	14.44	14.45	17.46	23.98	-6.52	5.94	23.40	30.00	-6.60
	5520	104	CDD	AVG	16.83	16.83	19.84	23.98	-4.14	5.94	25.78	30.00	-4.22
	5580	116	CDD	AVG	16.94	16.98	19.97	23.98	-4.01	5.94	25.91	30.00	-4.09
	5660	132	CDD	AVG	16.97	16.95	19.97	23.98	-4.01	5.94	25.91	30.00	-4.09
	5680	136	CDD	AVG	15.74	15.73	18.75	23.98	-5.23	5.94	24.69	30.00	-5.31
	5700	140	CDD	AVG	11.80	11.98	14.90	23.98	-9.08	5.94	20.84	30.00	-9.16
	5720	144	CDD	AVG	16.83	16.93	19.89	23.98	-4.09	5.94	25.83	30.00	-4.17
	5745	149	CDD	AVG	20.38	20.44	23.42	30.00	-6.58	5.31	28.73	-	-
	5785	157	CDD	AVG	20.43	20.46	23.46	30.00	-6.54	5.31	28.77	-	-
	5825	165	CDD	AVG	20.46	20.28	23.38	30.00	-6.62	5.31	28.69	-	-

Table 7-100. ISCED CDD/SDM 20MHz BW 802.11n (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 101 of 534

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 3a	Summed						
	5180	36	SDM	AVG	13.86	13.90	16.89	-	-	1.76	18.65	23.01	-4.36
	5200	40	SDM	AVG	13.92	13.97	16.96	-	-	1.76	18.72	23.01	-4.29
	5240	48	SDM	AVG	13.90	13.97	16.95	-	-	1.76	18.71	23.01	-4.30
	5260	52	CDD	AVG	16.85	16.96	19.92	23.98	-4.06	4.57	24.49	30.00	-5.51
	5300	60	CDD	AVG	16.80	16.85	19.84	23.98	-4.14	4.57	24.41	30.00	-5.59
	5320	64	CDD	AVG	15.89	15.92	18.92	23.98	-5.06	4.57	23.49	30.00	-6.51
	5500	100	CDD	AVG	16.35	16.34	19.36	23.98	-4.62	5.94	25.30	30.00	-4.70
	5520	104	CDD	AVG	16.87	16.94	19.92	23.98	-4.06	5.94	25.86	30.00	-4.14
	5580	116	CDD	AVG	16.81	16.80	19.82	23.98	-4.16	5.94	25.76	30.00	-4.24
	5660	132	CDD	AVG	16.96	16.76	19.87	23.98	-4.11	5.94	25.81	30.00	-4.19
	5680	136	CDD	AVG	16.77	16.87	19.83	23.98	-4.15	5.94	25.77	30.00	-4.23
	5700	140	CDD	AVG	14.80	14.99	17.91	23.98	-6.07	5.94	23.85	30.00	-6.15
	5720	144	CDD	AVG	16.98	16.83	19.92	23.98	-4.06	5.94	25.86	30.00	-4.14
	5745	149	CDD	AVG	20.27	20.36	23.33	30.00	-6.67	5.31	28.64	-	-
	5785	157	CDD	AVG	20.42	20.45	23.45	30.00	-6.55	5.31	28.76	-	-
	5825	165	CDD	AVG	20.44	20.48	23.47	30.00	-6.53	5.31	28.78	-	-

Table 7-101. ISSED CDD/SDM 20MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 3a	Summed						
	5180	36	SDM	AVG	13.89	13.97	16.94	-	-	1.76	18.70	23.01	-4.31
	5200	40	SDM	AVG	13.93	13.98	16.97	-	-	1.76	18.73	23.01	-4.28
	5240	48	SDM	AVG	13.94	13.94	16.95	-	-	1.76	18.71	23.01	-4.30
	5260	52	CDD	AVG	16.90	16.86	19.89	23.98	-4.09	4.57	24.46	30.00	-5.54
	5300	60	CDD	AVG	16.76	16.83	19.81	23.98	-4.17	4.57	24.38	30.00	-5.62
	5320	64	CDD	AVG	15.93	15.86	18.91	23.98	-5.07	4.57	23.48	30.00	-6.52
	5500	100	CDD	AVG	15.99	15.82	18.92	23.98	-5.06	5.94	24.86	30.00	-5.14
	5520	104	CDD	AVG	17.00	16.93	19.98	23.98	-4.00	5.94	25.92	30.00	-4.08
	5580	116	CDD	AVG	16.83	16.96	19.91	23.98	-4.07	5.94	25.85	30.00	-4.15
	5660	132	CDD	AVG	16.88	16.75	19.83	23.98	-4.15	5.94	25.77	30.00	-4.23
	5680	136	CDD	AVG	16.90	16.97	19.95	23.98	-4.03	5.94	25.89	30.00	-4.11
	5700	140	CDD	AVG	13.99	13.82	16.92	23.98	-7.06	5.94	22.86	30.00	-7.14
	5720	144	CDD	AVG	16.83	16.90	19.88	23.98	-4.10	5.94	25.82	30.00	-4.18
	5745	149	CDD	AVG	20.38	20.39	23.40	30.00	-6.60	5.31	28.71	-	-
	5785	157	CDD	AVG	20.46	20.47	23.48	30.00	-6.52	5.31	28.79	-	-
	5825	165	CDD	AVG	20.41	20.42	23.43	30.00	-6.57	5.31	28.74	-	-

Table 7-102. ISSED CDD/SDM 20MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 3a	Summed						
	5180	36	SDM	AVG	13.97	13.92	16.96	-	-	1.76	18.72	23.01	-4.29
	5200	40	SDM	AVG	13.88	13.88	16.89	-	-	1.76	18.65	23.01	-4.36
	5240	48	SDM	AVG	13.90	13.97	16.95	-	-	1.76	18.71	23.01	-4.30
	5260	52	CDD	AVG	16.80	16.91	19.87	23.98	-4.11	4.57	24.44	30.00	-5.56
	5300	60	CDD	AVG	16.91	17.00	19.97	23.98	-4.01	4.57	24.54	30.00	-5.46
	5320	64	CDD	AVG	15.86	15.97	18.93	23.98	-5.05	4.57	23.50	30.00	-6.50
	5500	100	CDD	AVG	13.87	14.00	16.95	23.98	-7.03	5.94	22.89	30.00	-7.11
	5520	104	CDD	AVG	16.86	16.92	19.90	23.98	-4.08	5.94	25.84	30.00	-4.16
	5580	116	CDD	AVG	16.83	16.90	19.88	23.98	-4.10	5.94	25.82	30.00	-4.18
	5660	132	CDD	AVG	16.95	16.93	19.95	23.98	-4.03	5.94	25.89	30.00	-4.11
	5680	136	CDD	AVG	15.95	16.00	18.99	23.98	-4.99	5.94	24.93	30.00	-5.07
	5700	140	CDD	AVG	11.93	11.81	14.88	23.98	-9.10	5.94	20.82	30.00	-9.18
	5720	144	CDD	AVG	16.82	16.96	19.90	23.98	-4.08	5.94	25.84	30.00	-4.16
	5745	149	CDD	AVG	20.31	20.37	23.35	30.00	-6.65	5.31	28.66	-	-
	5785	157	CDD	AVG	20.50	20.38	23.45	30.00	-6.55	5.31	28.76	-	-
	5825	165	CDD	AVG	20.40	20.31	23.37	30.00	-6.63	5.31	28.68	-	-

Table 7-103. ISSED CDD/SDM 20MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 102 of 534

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 3a	Summed						
	5190	38	CDD	AVG	14.27	14.31	17.30	-	-	4.69	21.99	23.01	-1.02
	5230	46	SDM	AVG	16.49	16.39	19.45	-	-	1.76	21.21	23.01	-1.80
	5270	54	CDD	AVG	19.45	19.49	22.48	23.98	-1.50	4.57	27.05	30.00	-2.95
	5310	62	CDD	AVG	12.34	12.29	15.33	23.98	-8.65	4.57	19.90	30.00	-10.10
	5510	102	CDD	AVG	12.79	12.80	15.81	23.98	-8.17	5.94	21.75	30.00	-8.25
	5550	110	CDD	AVG	19.36	19.26	22.32	23.98	-1.66	5.94	28.26	30.00	-1.74
	5670	134	CDD	AVG	17.25	17.35	20.31	23.98	-3.67	5.94	26.25	30.00	-3.75
	5710	142	CDD	AVG	19.31	19.32	22.33	23.98	-1.65	5.94	28.27	30.00	-1.73
	5755	151	CDD	AVG	19.26	19.43	22.36	30.00	-7.64	5.31	27.67	-	-
	5795	159	CDD	AVG	19.45	19.39	22.43	30.00	-7.57	5.31	27.74	-	-

Table 7-104. ISED CDD/SDM 40MHz BW 802.11n (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 3a	Summed						
	5190	38	CDD	AVG	13.72	13.84	16.79	-	-	4.69	21.48	23.01	-1.53
	5230	46	SDM	AVG	16.46	16.38	19.43	-	-	1.76	21.19	23.01	-1.82
	5270	54	CDD	AVG	19.44	19.47	22.47	23.98	-1.51	4.57	27.04	30.00	-2.96
	5310	62	CDD	AVG	13.79	13.99	16.90	23.98	-7.08	4.57	21.47	30.00	-8.53
	5510	102	CDD	AVG	12.49	12.46	15.49	23.98	-8.49	5.94	21.43	30.00	-8.57
	5550	110	CDD	AVG	17.90	17.98	20.95	23.98	-3.03	5.94	26.89	30.00	-3.11
	5670	134	CDD	AVG	16.16	16.16	19.17	23.98	-4.81	5.94	25.11	30.00	-4.89
	5710	142	CDD	AVG	19.48	19.41	19.41	23.98	-4.57	5.94	25.35	30.00	-4.65
	5755	151	CDD	AVG	19.33	19.40	22.38	30.00	-7.62	5.31	27.69	-	-
	5795	159	CDD	AVG	19.45	19.25	22.36	30.00	-7.64	5.31	27.67	-	-

Table 7-105. ISED CDD/SDM 40MHz BW 802.11n (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 3a	Summed						
	5190	38	CDD	AVG	13.72	13.69	16.72	-	-	4.69	21.41	23.01	-1.60
	5230	46	SDM	AVG	16.50	16.37	19.45	-	-	1.76	21.21	23.01	-1.80
	5270	54	CDD	AVG	19.38	19.43	22.42	23.98	-1.56	4.57	26.99	30.00	-3.01
	5310	62	CDD	AVG	12.83	12.96	15.91	23.98	-8.07	4.57	20.48	30.00	-9.52
	5510	102	CDD	AVG	11.15	11.25	14.21	23.98	-9.77	5.94	20.15	30.00	-9.85
	5550	110	CDD	AVG	17.00	16.85	19.94	23.98	-4.04	5.94	25.88	30.00	-4.12
	5670	134	CDD	AVG	14.31	14.15	17.24	23.98	-6.74	5.94	23.18	30.00	-6.82
	5710	142	CDD	AVG	19.40	19.33	22.38	23.98	-1.60	5.94	28.32	30.00	-1.68
	5755	151	CDD	AVG	19.43	19.48	22.47	30.00	-7.53	5.31	27.78	-	-
	5795	159	CDD	AVG	19.24	19.22	22.24	30.00	-7.76	5.31	27.55	-	-

Table 7-106. ISED CDD/SDM 40MHz BW 802.11n (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 3a	Summed						
	5190	38	CDD	AVG	13.45	13.48	16.48	-	-	4.69	21.17	23.01	-1.84
	5230	46	SDM	AVG	16.45	16.41	19.44	-	-	1.76	21.20	23.01	-1.81
	5270	54	CDD	AVG	19.27	19.36	22.33	23.98	-1.65	4.57	26.90	30.00	-3.10
	5310	62	CDD	AVG	11.93	11.98	14.97	23.98	-9.01	4.57	19.54	30.00	-10.46
	5510	102	CDD	AVG	12.92	12.83	15.89	23.98	-8.09	5.94	21.83	30.00	-8.17
	5550	110	CDD	AVG	18.46	18.49	21.49	23.98	-2.49	5.94	27.43	30.00	-2.57
	5670	134	CDD	AVG	16.15	16.10	19.14	23.98	-4.84	5.94	25.08	30.00	-4.92
	5710	142	CDD	AVG	19.49	19.46	22.49	23.98	-1.49	5.94	28.43	30.00	-1.57
	5755	151	CDD	AVG	19.45	19.37	22.42	30.00	-7.58	5.31	27.73	-	-
	5795	159	CDD	AVG	19.47	19.25	22.37	30.00	-7.63	5.31	27.68	-	-

Table 7-107. ISED CDD/SDM 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 103 of 534	

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 3a	Summed						
	5190	38	CDD	AVG	12.88	12.88	15.89	-	-	4.69	20.58	23.01	-2.43
	5230	46	SDM	AVG	16.37	16.41	19.40	-	-	1.76	21.16	23.01	-1.85
	5270	54	CDD	AVG	18.84	18.78	21.82	23.98	-2.16	4.57	26.39	30.00	-3.61
	5310	62	CDD	AVG	11.34	11.41	14.39	23.98	-9.59	4.57	18.96	30.00	-11.04
	5510	102	CDD	AVG	12.35	12.43	15.40	23.98	-8.58	5.94	21.34	30.00	-8.66
	5550	110	CDD	AVG	17.94	17.86	20.91	23.98	-3.07	5.94	26.85	30.00	-3.15
	5670	134	CDD	AVG	15.66	16.00	18.84	23.98	-5.14	5.94	24.78	30.00	-5.22
	5710	142	CDD	AVG	19.42	19.50	22.47	23.98	-1.51	5.94	28.41	30.00	-1.59
	5755	151	CDD	AVG	19.34	19.44	22.40	30.00	-7.60	5.31	27.71	-	-
	5795	159	CDD	AVG	19.37	19.32	22.36	30.00	-7.64	5.31	27.67	-	-

Table 7-108. ISED CDD/SDM 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 3a	Summed						
	5190	38	CDD	AVG	12.48	12.37	15.44	-	-	4.69	20.13	23.01	-2.88
	5230	46	SDM	AVG	16.38	16.41	19.41	-	-	1.76	21.17	23.01	-1.84
	5270	54	CDD	AVG	19.00	18.91	21.97	23.98	-2.01	4.57	26.54	30.00	-3.46
	5310	62	CDD	AVG	10.50	10.47	13.50	23.98	-10.48	4.57	18.07	30.00	-11.93
	5510	102	CDD	AVG	11.83	12.00	14.93	23.98	-9.05	5.94	20.87	30.00	-9.13
	5550	110	CDD	AVG	16.92	16.97	19.96	23.98	-4.02	5.94	25.90	30.00	-4.10
	5670	134	CDD	AVG	13.79	13.75	16.78	23.98	-7.20	5.94	22.72	30.00	-7.28
	5710	142	CDD	AVG	19.25	19.39	22.33	23.98	-1.65	5.94	28.27	30.00	-1.73
	5755	151	CDD	AVG	19.42	19.30	22.37	30.00	-7.63	5.31	27.68	-	-
	5795	159	CDD	AVG	19.42	19.27	22.36	30.00	-7.64	5.31	27.67	-	-

Table 7-109. ISED CDD/SDM 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 3a	Summed						
	5210	42	CDD	AVG	13.84	13.88	16.87	-	-	4.69	21.56	23.01	-1.45
	5290	58	CDD	AVG	11.88	11.99	14.95	23.98	-9.03	4.57	19.52	30.00	-10.48
	5530	106	CDD	AVG	12.37	12.39	15.39	23.98	-8.59	5.94	21.33	30.00	-8.67
	5690	138	CDD	AVG	19.75	19.93	22.85	23.98	-1.13	5.94	28.79	30.00	-1.21
	5775	155	CDD	AVG	17.85	17.79	20.83	30.00	-9.17	5.31	26.14	-	-

Table 7-110. ISED CDD 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 3a	Summed						
	5210	42	CDD	AVG	13.30	13.37	16.35	-	-	4.69	21.04	23.01	-1.97
	5290	58	CDD	AVG	10.77	10.91	13.85	23.98	-10.13	4.57	18.42	30.00	-11.58
	5530	106	CDD	AVG	11.79	11.98	14.90	23.98	-9.08	5.94	20.84	30.00	-9.16
	5690	138	CDD	AVG	19.90	19.82	22.87	23.98	-1.11	5.94	28.81	30.00	-1.19
	5775	155	CDD	AVG	16.90	16.96	19.94	30.00	-10.06	5.31	25.25	-	-

Table 7-111. ISED CDD 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 3a	Summed						
	5210	42	CDD	AVG	13.05	13.05	16.06	-	-	4.69	20.75	23.01	-2.26
	5290	58	CDD	AVG	10.04	10.18	13.12	23.98	-10.86	4.57	17.69	30.00	-12.31
	5530	106	CDD	AVG	11.13	11.10	14.13	23.98	-9.85	5.94	20.07	30.00	-9.93
	5690	138	CDD	AVG	19.94	19.95	22.96	23.98	-1.02	5.94	28.90	30.00	-1.10
	5775	155	CDD	AVG	16.50	16.49	19.51	30.00	-10.49	5.31	24.82	-	-

Table 7-112. ISED CDD 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 104 of 534

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 3a	Summed						
	5210	42	CDD	AVG	13.36	13.35	16.37	-	-	4.69	21.06	23.01	-1.95
	5290	58	CDD	AVG	11.37	11.41	14.40	23.98	-9.58	4.57	18.97	30.00	-11.03
	5530	106	CDD	AVG	11.33	11.25	14.30	23.98	-9.68	5.94	20.24	30.00	-9.76
	5690	138	CDD	AVG	19.93	19.91	22.93	23.98	-1.05	5.94	28.87	30.00	-1.13
	5775	155	CDD	AVG	17.27	17.48	20.39	30.00	-9.61	5.31	25.70	-	-

Table 7-113. ISED CDD 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 3a	Summed						
	5210	42	CDD	AVG	12.85	12.86	15.87	-	-	4.69	20.56	23.01	-2.45
	5290	58	CDD	AVG	10.97	10.90	13.95	23.98	-10.03	4.57	18.52	30.00	-11.48
	5530	106	CDD	AVG	10.82	10.86	13.85	23.98	-10.13	5.94	19.79	30.00	-10.21
	5690	138	CDD	AVG	19.91	19.90	22.92	23.98	-1.06	5.94	28.86	30.00	-1.14
	5775	155	CDD	AVG	16.38	16.26	19.33	30.00	-10.67	5.31	24.64	-	-

Table 7-114. ISED CDD 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 3a	Summed						
	5210	42	CDD	AVG	12.48	12.50	15.50	-	-	4.69	20.19	23.01	-2.82
	5290	58	CDD	AVG	10.20	10.25	13.24	23.98	-10.74	4.57	17.81	30.00	-12.19
	5530	106	CDD	AVG	10.00	9.93	12.98	23.98	-11.00	5.94	18.92	30.00	-11.08
	5690	138	CDD	AVG	19.75	19.80	22.79	23.98	-1.19	5.94	28.73	30.00	-1.27
	5775	155	CDD	AVG	16.41	16.39	19.41	30.00	-10.59	5.31	24.72	-	-

Table 7-115. ISED CDD 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 105 of 534

7.4.9 FCC CDD Diversity Maximum Conducted Output Power Measurements

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 1b	Summed		
	5180	36	CDD	AVG	16.96	16.91	19.95	23.98	-4.03
	5200	40	CDD	AVG	16.88	16.91	19.91	23.98	-4.07
	5240	48	CDD	AVG	16.90	16.83	19.88	23.98	-4.10
	5260	52	CDD	AVG	16.91	16.93	19.93	23.98	-4.05
	5300	60	CDD	AVG	16.95	16.86	19.92	23.98	-4.06
	5320	64	CDD	AVG	15.76	15.89	18.84	23.98	-5.14
	5500	100	CDD	AVG	16.46	16.38	19.43	23.98	-4.55
	5520	104	CDD	AVG	16.87	16.94	19.92	23.98	-4.06
	5580	116	CDD	AVG	16.85	16.98	19.93	23.98	-4.05
	5680	136	CDD	AVG	16.85	16.94	19.91	23.98	-4.07
	5700	140	CDD	AVG	15.36	15.37	18.38	23.98	-5.60
	5720	144	CDD	AVG	16.94	16.83	19.90	23.98	-4.08
	5745	149	CDD	AVG	20.43	20.39	23.42	30.00	-6.58
	5785	157	CDD	AVG	20.36	20.45	23.42	30.00	-6.58
	5825	165	CDD	AVG	20.36	20.48	23.43	30.00	-6.57

Table 7-116. FCC CDD 20MHz BW 802.11a (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 1b	Summed		
	5180	36	CDD	AVG	16.43	16.25	19.35	23.98	-4.63
	5200	40	CDD	AVG	16.90	16.94	19.93	23.98	-4.05
	5240	48	CDD	AVG	16.99	16.84	19.93	23.98	-4.05
	5260	52	CDD	AVG	16.84	16.86	19.86	23.98	-4.12
	5300	60	CDD	AVG	16.79	16.98	19.90	23.98	-4.08
	5320	64	CDD	AVG	15.90	15.99	18.96	23.98	-5.02
	5500	100	CDD	AVG	15.83	15.78	18.82	23.98	-5.16
	5520	104	CDD	AVG	16.96	16.76	19.87	23.98	-4.11
	5580	116	CDD	AVG	16.92	16.90	19.92	23.98	-4.06
	5680	136	CDD	AVG	16.85	16.99	19.93	23.98	-4.05
	5700	140	CDD	AVG	14.39	14.31	17.36	23.98	-6.62
	5720	144	CDD	AVG	16.81	16.90	19.87	23.98	-4.11
	5745	149	CDD	AVG	20.29	20.48	23.40	30.00	-6.60
	5785	157	CDD	AVG	20.47	20.32	23.41	30.00	-6.59
	5825	165	CDD	AVG	20.45	20.33	23.40	30.00	-6.60

Table 7-117. FCC CDD 20MHz BW 802.11a (UNII) Maximum Conducted Output Power (Mid Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 106 of 534

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 1b	Summed		
	5180	36	CDD	AVG	15.82	16.00	18.92	23.98	-5.06
	5200	40	CDD	AVG	16.75	16.89	19.83	23.98	-4.15
	5240	48	CDD	AVG	16.98	16.83	19.92	23.98	-4.06
	5260	52	CDD	AVG	17.00	16.80	19.91	23.98	-4.07
	5300	60	CDD	AVG	16.84	16.98	19.92	23.98	-4.06
	5320	64	CDD	AVG	15.76	15.75	18.77	23.98	-5.21
	5500	100	CDD	AVG	14.48	14.50	17.50	23.98	-6.48
	5520	104	CDD	AVG	16.84	16.91	19.89	23.98	-4.09
	5540	108	CDD	AVG	17.00	16.82	19.92	23.98	-4.06
	5580	116	CDD	AVG	16.94	16.80	19.88	23.98	-4.10
	5660	132	CDD	AVG	16.91	16.95	19.94	23.98	-4.04
	5680	136	CDD	AVG	15.91	15.83	18.88	23.98	-5.10
	5700	140	CDD	AVG	11.92	11.98	14.96	23.98	-9.02
	5720	144	CDD	AVG	16.95	17.00	19.99	23.98	-3.99
	5745	149	CDD	AVG	20.30	20.38	23.35	30.00	-6.65
	5785	157	CDD	AVG	20.42	20.28	23.36	30.00	-6.64
	5825	165	CDD	AVG	20.50	20.25	23.39	30.00	-6.61

Table 7-118. FCC CDD 20MHz BW 802.11a (UNII) Maximum Conducted Output Power (High Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 1b	Summed		
	5180	36	CDD	AVG	16.75	16.80	19.79	23.98	-4.19
	5200	40	CDD	AVG	16.94	16.75	19.86	23.98	-4.12
	5240	48	CDD	AVG	16.97	16.76	19.88	23.98	-4.10
	5260	52	CDD	AVG	16.99	16.79	19.90	23.98	-4.08
	5300	60	CDD	AVG	16.88	16.92	19.91	23.98	-4.07
	5320	64	CDD	AVG	15.78	15.75	18.78	23.98	-5.20
	5500	100	CDD	AVG	16.28	16.36	19.33	23.98	-4.65
	5520	104	CDD	AVG	16.86	16.95	19.92	23.98	-4.06
	5580	116	CDD	AVG	16.94	16.82	19.89	23.98	-4.09
	5680	136	CDD	AVG	16.94	16.94	19.95	23.98	-4.03
	5700	140	CDD	AVG	15.25	15.38	18.33	23.98	-5.65
	5720	144	CDD	AVG	16.96	16.89	19.94	23.98	-4.04
	5745	149	CDD	AVG	20.49	20.40	23.46	30.00	-6.54
	5785	157	CDD	AVG	20.39	20.43	23.42	30.00	-6.58
	5825	165	CDD	AVG	20.40	20.44	23.43	30.00	-6.57

Table 7-119. FCC CDD 20MHz BW 802.11n (UNII) Maximum Conducted Output Power (Low Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 107 of 534

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 1b	Summed		
	5180	36	CDD	AVG	16.47	16.42	19.46	23.98	-4.52
	5200	40	CDD	AVG	16.96	16.86	19.92	23.98	-4.06
	5240	48	CDD	AVG	16.88	16.88	19.89	23.98	-4.09
	5260	52	CDD	AVG	16.92	16.85	19.90	23.98	-4.08
	5300	60	CDD	AVG	16.66	16.93	19.81	23.98	-4.17
	5320	64	CDD	AVG	15.88	15.98	18.94	23.98	-5.04
	5500	100	CDD	AVG	15.90	15.87	18.90	23.98	-5.08
	5520	104	CDD	AVG	16.74	16.79	19.78	23.98	-4.20
	5580	116	CDD	AVG	16.83	16.86	19.86	23.98	-4.12
	5680	136	CDD	AVG	16.88	16.94	19.92	23.98	-4.06
	5700	140	CDD	AVG	14.36	14.26	17.32	23.98	-6.66
	5720	144	CDD	AVG	16.82	16.96	19.90	23.98	-4.08
	5745	149	CDD	AVG	20.36	20.43	23.41	30.00	-6.59
	5785	157	CDD	AVG	20.25	20.37	23.32	30.00	-6.68
	5825	165	CDD	AVG	20.42	20.30	23.37	30.00	-6.63

Table 7-120. FCC CDD 20MHz BW 802.11n (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 1b	Summed		
	5180	36	CDD	AVG	15.76	15.93	18.86	23.98	-5.12
	5200	40	CDD	AVG	17.00	16.97	20.00	23.98	-3.98
	5240	48	CDD	AVG	16.86	16.91	19.90	23.98	-4.08
	5260	52	CDD	AVG	16.88	16.97	19.94	23.98	-4.04
	5300	60	CDD	AVG	16.94	16.98	19.97	23.98	-4.01
	5320	64	CDD	AVG	15.74	15.97	18.87	23.98	-5.11
	5500	100	CDD	AVG	14.35	14.32	17.35	23.98	-6.63
	5520	104	CDD	AVG	16.98	16.79	19.90	23.98	-4.08
	5540	108	CDD	AVG	16.98	16.93	19.97	23.98	-4.01
	5580	116	CDD	AVG	16.82	16.95	19.90	23.98	-4.08
	5660	132	CDD	AVG	16.91	16.98	19.96	23.98	-4.02
	5680	136	CDD	AVG	15.91	16.00	18.97	23.98	-5.01
	5700	140	CDD	AVG	11.85	11.91	14.89	23.98	-9.09
	5720	144	CDD	AVG	16.99	16.88	19.95	23.98	-4.03
	5745	149	CDD	AVG	20.42	20.23	23.34	30.00	-6.66
	5785	157	CDD	AVG	20.44	20.42	23.44	30.00	-6.56
	5825	165	CDD	AVG	20.42	20.45	23.45	30.00	-6.55

Table 7-121. FCC CDD 20MHz BW 802.11n (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 108 of 534

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 1b	Summed		
	5180	36	CDD	AVG	15.92	15.89	18.92	23.98	-5.06
	5200	40	CDD	AVG	16.92	16.81	19.88	23.98	-4.10
	5240	48	CDD	AVG	16.83	16.96	19.91	23.98	-4.07
	5260	52	CDD	AVG	16.81	16.95	19.89	23.98	-4.09
	5300	60	CDD	AVG	16.77	16.81	19.80	23.98	-4.18
	5320	64	CDD	AVG	15.83	15.98	18.92	23.98	-5.06
	5500	100	CDD	AVG	16.31	16.38	19.36	23.98	-4.62
	5520	104	CDD	AVG	16.77	16.83	19.81	23.98	-4.17
	5580	116	CDD	AVG	16.93	16.82	19.89	23.98	-4.09
	5680	136	CDD	AVG	16.88	16.81	19.86	23.98	-4.12
	5700	140	CDD	AVG	14.85	14.86	17.87	23.98	-6.11
	5720	144	CDD	AVG	16.92	16.75	19.85	23.98	-4.13
	5745	149	CDD	AVG	20.37	20.43	23.41	30.00	-6.59
	5785	157	CDD	AVG	20.49	20.32	23.42	30.00	-6.58
	5825	165	CDD	AVG	20.40	20.33	23.38	30.00	-6.62

Table 7-122. FCC CDD 20MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 1b	Summed		
	5180	36	CDD	AVG	15.93	16.00	18.98	23.98	-5.00
	5200	40	CDD	AVG	16.78	16.84	19.82	23.98	-4.16
	5240	48	CDD	AVG	16.95	16.69	19.83	23.98	-4.15
	5260	52	CDD	AVG	16.87	16.80	19.85	23.98	-4.13
	5300	60	CDD	AVG	16.93	16.78	19.87	23.98	-4.11
	5320	64	CDD	AVG	15.92	15.82	18.88	23.98	-5.10
	5500	100	CDD	AVG	15.90	16.00	18.96	23.98	-5.02
	5520	104	CDD	AVG	16.95	16.98	19.98	23.98	-4.00
	5580	116	CDD	AVG	16.99	16.90	19.96	23.98	-4.02
	5680	136	CDD	AVG	16.92	16.93	19.94	23.98	-4.04
	5700	140	CDD	AVG	13.95	14.00	16.99	23.98	-6.99
	5720	144	CDD	AVG	16.98	16.95	19.98	23.98	-4.00
	5745	149	CDD	AVG	20.44	20.22	23.34	30.00	-6.66
	5785	157	CDD	AVG	20.27	20.37	23.33	30.00	-6.67
	5825	165	CDD	AVG	20.45	20.43	23.45	30.00	-6.55

Table 7-123. FCC CDD 20MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (Mid Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 109 of 534

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 1b	Summed		
	5180	36	CDD	AVG	15.27	15.41	18.35	23.98	-5.63
	5200	40	CDD	AVG	16.83	16.82	19.84	23.98	-4.14
	5240	48	CDD	AVG	16.87	16.83	19.86	23.98	-4.12
	5260	52	CDD	AVG	16.78	16.89	19.85	23.98	-4.13
	5300	60	CDD	AVG	16.93	17.00	19.98	23.98	-4.00
	5320	64	CDD	AVG	15.81	15.90	18.87	23.98	-5.11
	5500	100	CDD	AVG	13.86	13.87	16.88	23.98	-7.10
	5520	104	CDD	AVG	16.78	16.99	19.90	23.98	-4.08
	5540	108	CDD	AVG	17.00	16.90	19.96	23.98	-4.02
	5580	116	CDD	AVG	16.85	16.87	19.87	23.98	-4.11
	5660	132	CDD	AVG	16.96	16.91	19.95	23.98	-4.03
	5680	136	CDD	AVG	15.96	15.92	18.95	23.98	-5.03
	5700	140	CDD	AVG	11.94	11.90	14.93	23.98	-9.05
	5720	144	CDD	AVG	16.89	16.98	19.95	23.98	-4.03
	5745	149	CDD	AVG	20.46	20.38	23.43	30.00	-6.57
	5785	157	CDD	AVG	20.44	20.38	23.42	30.00	-6.58
	5825	165	CDD	AVG	20.43	20.34	23.40	30.00	-6.60

Table 7-124. FCC CDD 20MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (High Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 1b	Summed		
	5190	38	CDD	AVG	14.44	14.41	17.44	23.98	-6.54
	5230	46	CDD	AVG	19.37	19.43	22.41	23.98	-1.57
	5270	54	CDD	AVG	19.44	19.25	22.36	23.98	-1.62
	5310	62	CDD	AVG	12.33	12.28	15.32	23.98	-8.66
	5510	102	CDD	AVG	12.95	12.87	15.92	23.98	-8.06
	5550	110	CDD	AVG	19.29	19.38	22.35	23.98	-1.63
	5630	126	CDD	AVG	19.34	19.25	22.31	23.98	-1.67
	5670	134	CDD	AVG	17.45	17.39	20.43	23.98	-3.55
	5710	142	CDD	AVG	19.40	19.25	22.34	23.98	-1.64
	5755	151	CDD	AVG	19.35	19.46	22.42	30.00	-7.58
	5795	159	CDD	AVG	19.49	19.33	22.42	30.00	-7.58

Table 7-125. FCC CDD 40MHz BW 802.11n (UNII) Maximum Conducted Output Power (Low Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 110 of 534

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 1b	Summed		
	5190	38	CDD	AVG	14.00	13.78	16.90	23.98	-7.08
	5230	46	CDD	AVG	19.37	19.49	22.44	23.98	-1.54
	5270	54	CDD	AVG	19.32	19.36	22.35	23.98	-1.63
	5310	62	CDD	AVG	13.67	13.78	16.74	23.98	-7.24
	5510	102	CDD	AVG	12.47	12.39	15.44	23.98	-8.54
	5550	110	CDD	AVG	18.00	17.78	20.90	23.98	-3.08
	5630	126	CDD	AVG	19.41	19.48	22.46	23.98	-1.52
	5670	134	CDD	AVG	16.24	16.23	19.25	23.98	-4.73
	5710	142	CDD	AVG	19.37	19.40	22.40	23.98	-1.58
	5755	151	CDD	AVG	19.36	19.29	22.34	30.00	-7.66
	5795	159	CDD	AVG	19.32	19.47	22.41	30.00	-7.59

Table 7-126. FCC CDD 40MHz BW 802.11n (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 1b	Summed		
	5190	38	CDD	AVG	13.71	13.54	16.64	23.98	-7.34
	5230	46	CDD	AVG	19.39	19.31	22.36	23.98	-1.62
	5270	54	CDD	AVG	19.35	19.47	22.42	23.98	-1.56
	5310	62	CDD	AVG	12.91	12.97	15.95	23.98	-8.03
	5510	102	CDD	AVG	11.10	11.05	14.09	23.98	-9.89
	5550	110	CDD	AVG	16.73	16.99	19.87	23.98	-4.11
	5590	118	CDD	AVG	19.40	19.49	22.46	23.98	-1.52
	5630	126	CDD	AVG	18.70	18.85	21.79	23.98	-2.19
	5670	134	CDD	AVG	14.44	14.36	17.41	23.98	-6.57
	5710	142	CDD	AVG	19.37	19.45	22.42	23.98	-1.56
	5755	151	CDD	AVG	19.34	19.23	22.30	30.00	-7.70
	5795	159	CDD	AVG	19.37	19.46	22.43	30.00	-7.57

Table 7-127. FCC CDD 40MHz BW 802.11n (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 111 of 534

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 1b	Summed		
	5190	38	CDD	AVG	13.39	13.47	16.44	23.98	-7.54
	5230	46	CDD	AVG	19.32	19.48	22.41	23.98	-1.57
	5270	54	CDD	AVG	19.49	19.34	22.43	23.98	-1.55
	5310	62	CDD	AVG	11.89	11.93	14.92	23.98	-9.06
	5510	102	CDD	AVG	12.98	12.76	15.88	23.98	-8.10
	5550	110	CDD	AVG	18.28	18.36	21.33	23.98	-2.65
	5630	126	CDD	AVG	19.26	19.33	22.31	23.98	-1.67
	5670	134	CDD	AVG	16.19	16.15	19.18	23.98	-4.80
	5710	142	CDD	AVG	19.27	19.25	22.27	23.98	-1.71
	5755	151	CDD	AVG	19.32	19.27	22.31	30.00	-7.69
	5795	159	CDD	AVG	19.31	19.37	22.35	30.00	-7.65

Table 7-128. FCC CDD 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 1b	Summed		
	5190	38	CDD	AVG	12.90	13.00	15.96	23.98	-8.02
	5230	46	CDD	AVG	18.88	18.99	21.95	23.98	-2.03
	5270	54	CDD	AVG	19.00	18.96	21.99	23.98	-1.99
	5310	62	CDD	AVG	11.36	11.33	14.36	23.98	-9.62
	5510	102	CDD	AVG	12.46	12.22	15.35	23.98	-8.63
	5550	110	CDD	AVG	17.95	17.87	20.92	23.98	-3.06
	5630	126	CDD	AVG	19.28	19.46	22.38	23.98	-1.60
	5670	134	CDD	AVG	15.80	15.94	18.88	23.98	-5.10
	5710	142	CDD	AVG	19.35	19.27	22.32	23.98	-1.66
	5755	151	CDD	AVG	19.47	19.46	22.48	30.00	-7.52
	5795	159	CDD	AVG	19.39	19.31	22.36	30.00	-7.64

Table 7-129. FCC CDD 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (Mid Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 112 of 534

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 1b	Summed		
	5190	38	CDD	AVG	12.35	12.34	15.36	23.98	-8.62
	5230	46	CDD	AVG	18.98	18.95	21.98	23.98	-2.00
	5270	54	CDD	AVG	18.92	18.74	21.84	23.98	-2.14
	5310	62	CDD	AVG	10.42	10.43	13.44	23.98	-10.54
	5510	102	CDD	AVG	11.92	11.99	14.97	23.98	-9.01
	5550	110	CDD	AVG	16.96	16.83	19.91	23.98	-4.07
	5590	118	CDD	AVG	19.39	19.38	22.40	23.98	-1.58
	5630	126	CDD	AVG	18.38	18.35	21.38	23.98	-2.60
	5670	134	CDD	AVG	13.75	13.89	16.83	23.98	-7.15
	5710	142	CDD	AVG	19.47	19.45	22.47	23.98	-1.51
	5755	151	CDD	AVG	19.43	19.46	22.46	30.00	-7.54
	5795	159	CDD	AVG	19.29	19.43	22.37	30.00	-7.63

Table 7-130. FCC CDD 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power (High Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 1b	Summed		
	5210	42	CDD	AVG	13.98	13.82	16.91	23.98	-7.07
	5290	58	CDD	AVG	11.87	11.84	14.87	23.98	-9.11
	5530	106	CDD	AVG	12.25	12.38	15.33	23.98	-8.65
	5610	122	CDD	AVG	18.49	18.32	21.42	23.98	-2.56
	5690	138	CDD	AVG	19.77	19.91	22.85	23.98	-1.13
	5775	155	CDD	AVG	17.75	17.77	20.77	30.00	-9.23

Table 7-131. FCC CDD 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 1b	Summed		
	5210	42	CDD	AVG	13.37	13.32	16.36	23.98	-7.62
	5290	58	CDD	AVG	10.98	11.00	14.00	23.98	-9.98
	5530	106	CDD	AVG	11.81	12.00	14.92	23.98	-9.06
	5610	122	CDD	AVG	17.63	17.68	20.67	23.98	-3.31
	5690	138	CDD	AVG	19.99	19.82	22.92	23.98	-1.06
	5775	155	CDD	AVG	16.94	16.92	19.94	30.00	-10.06

Table 7-132. FCC CDD 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power (Mid Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 113 of 534

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 1b	Summed		
	5210	42	CDD	AVG	13.08	13.09	16.10	23.98	-7.88
	5290	58	CDD	AVG	10.10	10.01	13.07	23.98	-10.91
	5530	106	CDD	AVG	11.22	11.21	14.23	23.98	-9.75
	5610	122	CDD	AVG	16.54	16.69	19.63	23.98	-4.35
	5690	138	CDD	AVG	19.90	19.94	22.93	23.98	-1.05
	5775	155	CDD	AVG	16.34	16.45	19.41	30.00	-10.59

Table 7-133. FCC CDD 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power (High Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 1b	Summed		
	5210	42	CDD	AVG	13.37	13.46	16.43	23.98	-7.55
	5290	58	CDD	AVG	11.49	11.28	14.40	23.98	-9.58
	5530	106	CDD	AVG	11.48	11.33	14.42	23.98	-9.56
	5610	122	CDD	AVG	17.89	17.75	20.83	23.98	-3.15
	5690	138	CDD	AVG	19.93	19.77	22.86	23.98	-1.12
	5775	155	CDD	AVG	17.41	17.39	20.41	30.00	-9.59

Table 7-134. FCC CDD 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 1b	Summed		
	5210	42	CDD	AVG	12.93	13.00	15.98	23.98	-8.00
	5290	58	CDD	AVG	10.83	10.89	13.87	23.98	-10.11
	5530	106	CDD	AVG	10.96	10.81	13.90	23.98	-10.08
	5610	122	CDD	AVG	17.33	17.26	20.31	23.98	-3.67
	5690	138	CDD	AVG	19.95	19.98	22.98	23.98	-1.00
	5775	155	CDD	AVG	16.47	16.39	19.44	30.00	-10.56

Table 7-135. FCC CDD 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 3c	Antenna 1b	Summed		
	5210	42	CDD	AVG	12.11	12.34	15.24	23.98	-8.74
	5290	58	CDD	AVG	10.22	10.04	13.14	23.98	-10.84
	5530	106	CDD	AVG	9.93	9.90	12.93	23.98	-11.05
	5610	122	CDD	AVG	15.89	15.88	18.90	23.98	-5.08
	5690	138	CDD	AVG	19.87	19.95	22.92	23.98	-1.06
	5775	155	CDD	AVG	16.49	16.33	19.42	30.00	-10.58

Table 7-136. FCC CDD 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 114 of 534

7.4.10 ISED CDD/SDM Diversity Maximum Conducted Output Power Measurements

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 1b	Summed						
	5180	36	CDD	AVG	11.18	11.18	14.19	-	-	3.96	18.15	23.01	-4.86
	5200	40	CDD	AVG	11.12	11.19	14.17	-	-	3.96	18.13	23.01	-4.88
	5240	48	CDD	AVG	11.19	11.14	14.18	-	-	3.96	18.14	23.01	-4.87
	5260	52	CDD	AVG	16.91	16.93	19.93	23.98	-4.05	3.22	23.15	30.00	-6.85
	5300	60	CDD	AVG	16.95	16.86	19.92	23.98	-4.06	3.22	23.14	30.00	-6.86
	5320	64	CDD	AVG	15.76	15.89	18.84	23.98	-5.14	3.22	22.06	30.00	-7.94
	5500	100	CDD	AVG	16.46	16.38	19.43	23.98	-4.55	4.57	24.00	30.00	-6.00
	5520	104	CDD	AVG	16.87	16.94	19.92	23.98	-4.06	4.57	24.49	30.00	-5.51
	5580	116	CDD	AVG	16.85	16.98	19.93	23.98	-4.05	4.57	24.50	30.00	-5.50
	5660	132	CDD	AVG	16.93	16.84	19.90	23.98	-4.08	4.57	24.47	30.00	-5.53
	5680	136	CDD	AVG	16.85	16.94	19.91	23.98	-4.07	4.57	24.48	30.00	-5.52
	5700	140	CDD	AVG	15.36	15.37	18.38	23.98	-5.60	4.57	22.95	30.00	-7.05
	5720	144	CDD	AVG	16.94	16.83	19.90	23.98	-4.08	4.57	24.47	30.00	-5.53
	5745	149	CDD	AVG	20.43	20.39	23.42	30.00	-6.58	4.36	27.78	-	-
	5785	157	CDD	AVG	20.36	20.45	23.42	30.00	-6.58	4.36	27.78	-	-
	5825	165	CDD	AVG	20.36	20.48	23.43	30.00	-6.57	4.36	27.79	-	-

Table 7-137. ISED CDD 20MHz BW 802.11a (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 1b	Summed						
	5180	36	CDD	AVG	11.14	11.20	14.18	-	-	3.96	18.14	23.01	-4.87
	5200	40	CDD	AVG	11.13	11.10	14.13	-	-	3.96	18.09	23.01	-4.92
	5240	48	CDD	AVG	11.15	11.12	14.15	-	-	3.96	18.11	23.01	-4.90
	5260	52	CDD	AVG	16.84	16.86	19.86	23.98	-4.12	3.22	23.08	30.00	-6.92
	5300	60	CDD	AVG	16.79	16.98	19.90	23.98	-4.08	3.22	23.12	30.00	-6.88
	5320	64	CDD	AVG	15.90	15.99	18.96	23.98	-5.02	3.22	22.18	30.00	-7.82
	5500	100	CDD	AVG	15.83	15.78	18.82	23.98	-5.16	4.57	23.39	30.00	-6.61
	5520	104	CDD	AVG	16.96	16.76	19.87	23.98	-4.11	4.57	24.44	30.00	-5.56
	5580	116	CDD	AVG	16.92	16.90	19.92	23.98	-4.06	4.57	24.49	30.00	-5.51
	5660	132	CDD	AVG	16.78	16.75	19.78	23.98	-4.20	4.57	24.35	30.00	-5.65
	5680	136	CDD	AVG	16.85	16.99	19.93	23.98	-4.05	4.57	24.50	30.00	-5.50
	5700	140	CDD	AVG	14.39	14.31	17.36	23.98	-6.62	4.57	21.93	30.00	-8.07
	5720	144	CDD	AVG	16.81	16.90	19.87	23.98	-4.11	4.57	24.44	30.00	-5.56
	5745	149	CDD	AVG	20.29	20.48	23.40	30.00	-6.60	4.36	27.76	-	-
	5785	157	CDD	AVG	20.47	20.32	23.41	30.00	-6.59	4.36	27.77	-	-
	5825	165	CDD	AVG	20.45	20.33	23.40	30.00	-6.60	4.36	27.76	-	-

Table 7-138. ISED CDD 20MHz BW 802.11a (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 1b	Summed						
	5180	36	CDD	AVG	11.23	11.25	14.25	-	-	3.96	18.21	23.01	-4.80
	5200	40	CDD	AVG	11.17	11.18	14.19	-	-	3.96	18.15	23.01	-4.86
	5240	48	CDD	AVG	11.13	11.18	14.17	-	-	3.96	18.13	23.01	-4.88
	5260	52	CDD	AVG	17.00	16.80	19.91	23.98	-4.07	3.22	23.13	30.00	-6.87
	5300	60	CDD	AVG	16.84	16.98	19.92	23.98	-4.06	3.22	23.14	30.00	-6.86
	5320	64	CDD	AVG	15.76	15.75	18.77	23.98	-5.21	3.22	21.99	30.00	-8.01
	5500	100	CDD	AVG	14.48	14.50	17.50	23.98	-6.48	4.57	22.07	30.00	-7.93
	5520	104	CDD	AVG	16.84	16.91	19.89	23.98	-4.09	4.57	24.46	30.00	-5.54
	5580	116	CDD	AVG	16.94	16.80	19.88	23.98	-4.10	4.57	24.45	30.00	-5.55
	5660	132	CDD	AVG	16.91	16.95	19.94	23.98	-4.04	4.57	24.51	30.00	-5.49
	5680	136	CDD	AVG	15.91	15.83	18.88	23.98	-5.10	4.57	23.45	30.00	-6.55
	5700	140	CDD	AVG	11.92	11.98	14.96	23.98	-9.02	4.57	19.53	30.00	-10.47
	5720	144	CDD	AVG	16.95	17.00	19.99	23.98	-3.99	4.57	24.56	30.00	-5.44
	5745	149	CDD	AVG	20.30	20.38	23.35	30.00	-6.65	4.36	27.71	-	-
	5785	157	CDD	AVG	20.42	20.28	23.36	30.00	-6.64	4.36	27.72	-	-
	5825	165	CDD	AVG	20.50	20.25	23.39	30.00	-6.61	4.36	27.75	-	-

FCC ID: BCGA2757 IC: 579C-A2757		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 115 of 534

Table 7-139. ISED CDD 20MHz BW 802.11a (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 1b	Summed						
	5180	36	SDM	AVG	13.86	13.99	16.94	-	-	1.19	18.13	23.01	-4.88
	5200	40	SDM	AVG	13.90	14.00	16.96	-	-	1.19	18.15	23.01	-4.86
	5240	48	SDM	AVG	13.91	13.93	16.93	-	-	1.19	18.12	23.01	-4.89
	5260	52	CDD	AVG	16.99	16.79	19.90	23.98	-4.08	3.22	23.12	30.00	-6.88
	5300	60	CDD	AVG	16.88	16.92	19.91	23.98	-4.07	3.22	23.13	30.00	-6.87
	5320	64	CDD	AVG	15.78	15.75	18.78	23.98	-5.20	3.22	22.00	30.00	-8.00
	5500	100	CDD	AVG	16.28	16.36	19.33	23.98	-4.65	4.57	23.90	30.00	-6.10
	5520	104	CDD	AVG	16.86	16.95	19.92	23.98	-4.06	4.57	24.49	30.00	-5.51
	5580	116	CDD	AVG	16.94	16.82	19.89	23.98	-4.09	4.57	24.46	30.00	-5.54
	5660	132	CDD	AVG	16.79	16.92	19.87	23.98	-4.11	4.57	24.44	30.00	-5.56
	5680	136	CDD	AVG	16.94	16.94	19.95	23.98	-4.03	4.57	24.52	30.00	-5.48
	5700	140	CDD	AVG	15.25	15.38	18.33	23.98	-5.65	4.57	22.90	30.00	-7.10
	5720	144	CDD	AVG	16.96	16.89	19.94	23.98	-4.04	4.57	24.51	30.00	-5.49
	5745	149	CDD	AVG	20.49	20.40	23.46	30.00	-6.54	4.36	27.82	-	-
	5785	157	CDD	AVG	20.39	20.43	23.42	30.00	-6.58	4.36	27.78	-	-
	5825	165	CDD	AVG	20.40	20.44	23.43	30.00	-6.57	4.36	27.79	-	-

Table 7-140. ISED CDD/SDM 20MHz BW 802.11n (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 1b	Summed						
	5180	36	SDM	AVG	13.90	13.97	16.95	-	-	1.19	18.14	23.01	-4.87
	5200	40	SDM	AVG	13.87	13.98	16.94	-	-	1.19	18.13	23.01	-4.88
	5240	48	SDM	AVG	14.00	13.89	16.96	-	-	1.19	18.15	23.01	-4.86
	5260	52	CDD	AVG	16.92	16.85	19.90	23.98	-4.08	3.22	23.12	30.00	-6.88
	5300	60	CDD	AVG	16.66	16.93	19.81	23.98	-4.17	3.22	23.03	30.00	-6.97
	5320	64	CDD	AVG	15.88	15.98	18.94	23.98	-5.04	3.22	22.16	30.00	-7.84
	5500	100	CDD	AVG	15.90	15.87	18.90	23.98	-5.08	4.57	23.47	30.00	-6.53
	5520	104	CDD	AVG	16.74	16.79	19.78	23.98	-4.20	4.57	24.35	30.00	-5.65
	5580	116	CDD	AVG	16.83	16.86	19.86	23.98	-4.12	4.57	24.43	30.00	-5.57
	5660	132	CDD	AVG	16.91	16.81	19.87	23.98	-4.11	4.57	24.44	30.00	-5.56
	5680	136	CDD	AVG	16.88	16.94	19.92	23.98	-4.06	4.57	24.49	30.00	-5.51
	5700	140	CDD	AVG	14.36	14.26	17.32	23.98	-6.66	4.57	21.89	30.00	-8.11
	5720	144	CDD	AVG	16.82	16.96	19.90	23.98	-4.08	4.57	24.47	30.00	-5.53
	5745	149	CDD	AVG	20.36	20.43	23.41	30.00	-6.59	4.36	27.77	-	-
	5785	157	CDD	AVG	20.25	20.37	23.32	30.00	-6.68	4.36	27.68	-	-
	5825	165	CDD	AVG	20.42	20.30	23.37	30.00	-6.63	4.36	27.73	-	-

Table 7-141. ISED CDD/SDM 20MHz BW 802.11n (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 1b	Summed						
	5180	36	SDM	AVG	13.95	13.99	16.98	-	-	1.19	18.17	23.01	-4.84
	5200	40	SDM	AVG	13.98	13.92	16.96	-	-	1.19	18.15	23.01	-4.86
	5240	48	SDM	AVG	13.89	13.93	16.92	-	-	1.19	18.11	23.01	-4.90
	5260	52	CDD	AVG	16.88	16.97	19.94	23.98	-4.04	3.22	23.16	30.00	-6.84
	5300	60	CDD	AVG	16.94	16.98	19.97	23.98	-4.01	3.22	23.19	30.00	-6.81
	5320	64	CDD	AVG	15.74	15.97	18.87	23.98	-5.11	3.22	22.09	30.00	-7.91
	5500	100	CDD	AVG	14.35	14.32	17.35	23.98	-6.63	4.57	21.92	30.00	-8.08
	5520	104	CDD	AVG	16.98	16.79	19.90	23.98	-4.08	4.57	24.47	30.00	-5.53
	5580	116	CDD	AVG	16.82	16.95	19.90	23.98	-4.08	4.57	24.47	30.00	-5.53
	5660	132	CDD	AVG	16.91	16.98	19.96	23.98	-4.02	4.57	24.53	30.00	-5.47
	5680	136	CDD	AVG	15.91	16.00	18.97	23.98	-5.01	4.57	23.54	30.00	-6.46
	5700	140	CDD	AVG	11.85	11.91	14.89	23.98	-9.09	4.57	19.46	30.00	-10.54
	5720	144	CDD	AVG	16.99	16.88	19.95	23.98	-4.03	4.57	24.52	30.00	-5.48
	5745	149	CDD	AVG	20.42	20.23	23.34	30.00	-6.66	4.36	27.70	-	-
	5785	157	CDD	AVG	20.44	20.42	23.44	30.00	-6.56	4.36	27.80	-	-
	5825	165	CDD	AVG	20.42	20.45	23.45	30.00	-6.55	4.36	27.81	-	-

Table 7-142. ISED CDD/SDM 20MHz BW 802.11n (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 116 of 534

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 1b	Summed						
	5180	36	SDM	AVG	13.96	13.90	16.94	-	-	1.19	18.13	23.01	-4.88
	5200	40	SDM	AVG	13.91	13.95	16.94	-	-	1.19	18.13	23.01	-4.88
	5240	48	SDM	AVG	13.86	13.85	16.87	-	-	1.19	18.06	23.01	-4.95
	5260	52	CDD	AVG	16.81	16.95	19.89	23.98	-4.09	3.22	23.11	30.00	-6.89
	5300	60	CDD	AVG	16.77	16.81	19.80	23.98	-4.18	3.22	23.02	30.00	-6.98
	5320	64	CDD	AVG	15.83	15.98	18.92	23.98	-5.06	3.22	22.14	30.00	-7.86
	5500	100	CDD	AVG	16.31	16.38	19.36	23.98	-4.62	4.57	23.93	30.00	-6.07
	5520	104	CDD	AVG	16.77	16.83	19.81	23.98	-4.17	4.57	24.38	30.00	-5.62
	5580	116	CDD	AVG	16.93	16.82	19.89	23.98	-4.09	4.57	24.46	30.00	-5.54
	5660	132	CDD	AVG	16.75	16.96	19.87	23.98	-4.11	4.57	24.44	30.00	-5.56
	5680	136	CDD	AVG	16.88	16.81	19.86	23.98	-4.12	4.57	24.43	30.00	-5.57
	5700	140	CDD	AVG	14.85	14.86	17.87	23.98	-6.11	4.57	22.44	30.00	-7.56
	5720	144	CDD	AVG	16.92	16.75	19.85	23.98	-4.13	4.57	24.42	30.00	-5.58
	5745	149	CDD	AVG	20.37	20.43	23.41	30.00	-6.59	4.36	27.77	-	-
	5785	157	CDD	AVG	20.49	20.32	23.42	30.00	-6.58	4.36	27.78	-	-
	5825	165	CDD	AVG	20.40	20.33	23.38	30.00	-6.62	4.36	27.74	-	-

Table 7-143. ISED CDD/SDM 20MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 1b	Summed						
	5180	36	SDM	AVG	13.90	13.92	16.92	-	-	1.19	18.11	23.01	-4.90
	5200	40	SDM	AVG	13.99	13.95	16.98	-	-	1.19	18.17	23.01	-4.84
	5240	48	SDM	AVG	13.91	13.97	16.95	-	-	1.19	18.14	23.01	-4.87
	5260	52	CDD	AVG	16.87	16.80	19.85	23.98	-4.13	3.22	23.07	30.00	-6.93
	5300	60	CDD	AVG	16.93	16.78	19.87	23.98	-4.11	3.22	23.09	30.00	-6.91
	5320	64	CDD	AVG	15.92	15.82	18.88	23.98	-5.10	3.22	22.10	30.00	-7.90
	5500	100	CDD	AVG	15.90	16.00	18.96	23.98	-5.02	4.57	23.53	30.00	-6.47
	5520	104	CDD	AVG	16.95	16.98	19.98	23.98	-4.00	4.57	24.55	30.00	-5.45
	5580	116	CDD	AVG	16.99	16.90	19.96	23.98	-4.02	4.57	24.53	30.00	-5.47
	5660	132	CDD	AVG	16.97	16.94	19.97	23.98	-4.01	4.57	24.54	30.00	-5.46
	5680	136	CDD	AVG	16.92	16.93	19.94	23.98	-4.04	4.57	24.51	30.00	-5.49
	5700	140	CDD	AVG	13.95	14.00	16.99	23.98	-6.99	4.57	21.56	30.00	-8.44
	5720	144	CDD	AVG	16.98	16.95	19.98	23.98	-4.00	4.57	24.55	30.00	-5.45
	5745	149	CDD	AVG	20.44	20.22	23.34	30.00	-6.66	4.36	27.70	-	-
	5785	157	CDD	AVG	20.27	20.37	23.33	30.00	-6.67	4.36	27.69	-	-
	5825	165	CDD	AVG	20.45	20.43	23.45	30.00	-6.55	4.36	27.81	-	-

Table 7-144. ISED CDD/SDM 20MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 1b	Summed						
	5180	36	SDM	AVG	13.91	13.90	16.92	-	-	1.19	18.11	23.01	-4.90
	5200	40	SDM	AVG	14.00	13.99	17.01	-	-	1.19	18.20	23.01	-4.81
	5240	48	SDM	AVG	13.96	13.87	16.93	-	-	1.19	18.12	23.01	-4.89
	5260	52	CDD	AVG	16.78	16.89	19.85	23.98	-4.13	3.22	23.07	30.00	-6.93
	5300	60	CDD	AVG	16.93	17.00	19.98	23.98	-4.00	3.22	23.20	30.00	-6.80
	5320	64	CDD	AVG	15.81	15.90	18.87	23.98	-5.11	3.22	22.09	30.00	-7.91
	5500	100	CDD	AVG	13.86	13.87	16.88	23.98	-7.10	4.57	21.45	30.00	-8.55
	5520	104	CDD	AVG	16.78	16.99	19.90	23.98	-4.08	4.57	24.47	30.00	-5.53
	5580	116	CDD	AVG	16.85	16.87	19.87	23.98	-4.11	4.57	24.44	30.00	-5.56
	5660	132	CDD	AVG	16.96	16.91	19.95	23.98	-4.03	4.57	24.52	30.00	-5.48
	5680	136	CDD	AVG	15.96	15.92	18.95	23.98	-5.03	4.57	23.52	30.00	-6.48
	5700	140	CDD	AVG	11.94	11.90	14.93	23.98	-9.05	4.57	19.50	30.00	-10.50
	5720	144	CDD	AVG	16.89	16.98	19.95	23.98	-4.03	4.57	24.52	30.00	-5.48
	5745	149	CDD	AVG	20.46	20.38	23.43	30.00	-6.57	4.36	27.79	-	-
	5785	157	CDD	AVG	20.44	20.38	23.42	30.00	-6.58	4.36	27.78	-	-
	5825	165	CDD	AVG	20.43	20.34	23.40	30.00	-6.60	4.36	27.76	-	-

Table 7-145. ISED CDD/SDM 20MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 117 of 534

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 1b	Summed						
	5190	38	CDD	AVG	14.44	14.41	17.44	-	-	3.96	21.40	23.01	-1.61
	5230	46	SDM	AVG	16.48	16.46	19.48	-	-	1.19	20.67	23.01	-2.34
	5270	54	CDD	AVG	19.44	19.25	22.36	23.98	-1.62	3.22	25.58	30.00	-4.42
	5310	62	CDD	AVG	12.33	12.28	15.32	23.98	-8.66	3.22	18.54	30.00	-11.46
	5510	102	CDD	AVG	12.95	12.87	15.92	23.98	-8.06	4.57	20.49	30.00	-9.51
	5550	110	CDD	AVG	19.29	19.38	22.35	23.98	-1.63	4.57	26.92	30.00	-3.08
	5670	134	CDD	AVG	17.45	17.39	20.43	23.98	-3.55	4.57	25.00	30.00	-5.00
	5710	142	CDD	AVG	19.40	19.25	22.34	23.98	-1.64	4.57	26.91	30.00	-3.09
	5755	151	CDD	AVG	19.35	19.46	22.42	30.00	-7.58	4.36	26.78	-	-
	5795	159	CDD	AVG	19.49	19.33	22.42	30.00	-7.58	4.36	26.78	-	-

Table 7-146. ISED CDD/SDM 40MHz BW 802.11n (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 1b	Summed						
	5190	38	CDD	AVG	14.00	13.78	16.90	-	-	3.96	20.86	23.01	-2.15
	5230	46	SDM	AVG	16.50	16.44	19.48	-	-	1.19	20.67	23.01	-2.34
	5270	54	CDD	AVG	19.32	19.36	22.35	23.98	-1.63	3.22	25.57	30.00	-4.43
	5310	62	CDD	AVG	13.67	13.78	16.74	23.98	-7.24	3.22	19.96	30.00	-10.04
	5510	102	CDD	AVG	12.47	12.39	15.44	23.98	-8.54	4.57	20.01	30.00	-9.99
	5550	110	CDD	AVG	18.00	17.78	20.90	23.98	-3.08	4.57	25.47	30.00	-4.53
	5670	134	CDD	AVG	16.24	16.23	19.25	23.98	-4.73	4.57	23.82	30.00	-6.18
	5710	142	CDD	AVG	19.37	19.40	22.40	23.98	-1.58	4.57	26.97	30.00	-3.03
	5755	151	CDD	AVG	19.36	19.29	22.34	30.00	-7.66	4.36	26.70	-	-
	5795	159	CDD	AVG	19.32	19.47	22.41	30.00	-7.59	4.36	26.77	-	-

Table 7-147. ISED CDD/SDM 40MHz BW 802.11n (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 1b	Summed						
	5190	38	CDD	AVG	13.71	13.54	16.64	-	-	3.96	20.60	23.01	-2.41
	5230	46	SDM	AVG	16.42	16.47	19.46	-	-	1.19	20.65	23.01	-2.36
	5270	54	CDD	AVG	19.35	19.47	22.42	23.98	-1.56	3.22	25.64	30.00	-4.36
	5310	62	CDD	AVG	12.91	12.97	15.95	23.98	-8.03	3.22	19.17	30.00	-10.83
	5510	102	CDD	AVG	11.10	11.05	14.09	23.98	-9.89	4.57	18.66	30.00	-11.34
	5550	110	CDD	AVG	16.73	16.99	19.87	23.98	-4.11	4.57	24.44	30.00	-5.56
	5670	134	CDD	AVG	14.44	14.36	17.41	23.98	-6.57	4.57	21.98	30.00	-8.02
	5710	142	CDD	AVG	19.37	19.45	22.42	23.98	-1.56	4.57	26.99	30.00	-3.01
	5755	151	CDD	AVG	19.34	19.23	22.30	30.00	-7.70	4.36	26.66	-	-
	5795	159	CDD	AVG	19.37	19.46	22.43	30.00	-7.57	4.36	26.79	-	-

Table 7-148. ISED CDD/SDM 40MHz BW 802.11n (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 1b	Summed						
	5190	38	CDD	AVG	13.39	13.47	16.44	-	-	3.96	20.40	23.01	-2.61
	5230	46	SDM	AVG	16.44	16.44	19.45	-	-	1.19	20.64	23.01	-2.37
	5270	54	CDD	AVG	19.49	19.34	22.43	23.98	-1.55	3.22	25.65	30.00	-4.35
	5310	62	CDD	AVG	11.89	11.93	14.92	23.98	-9.06	3.22	18.14	30.00	-11.86
	5510	102	CDD	AVG	12.98	12.76	15.88	23.98	-8.10	4.57	20.45	30.00	-9.55
	5550	110	CDD	AVG	18.28	18.36	21.33	23.98	-2.65	4.57	25.90	30.00	-4.10
	5670	134	CDD	AVG	16.19	16.15	19.18	23.98	-4.80	4.57	23.75	30.00	-6.25
	5710	142	CDD	AVG	19.27	19.25	22.27	23.98	-1.71	4.57	26.84	30.00	-3.16
	5755	151	CDD	AVG	19.32	19.27	22.31	30.00	-7.69	4.36	26.67	-	-
	5795	159	CDD	AVG	19.31	19.37	22.35	30.00	-7.65	4.36	26.71	-	-

Table 7-149. ISED CDD/SDM 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 118 of 534	

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 1b	Summed						
	5190	38	CDD	AVG	12.90	13.00	15.96	-	-	3.96	19.92	23.01	-3.09
	5230	46	SDM	AVG	16.35	16.36	19.37	-	-	1.19	20.56	23.01	-2.45
	5270	54	CDD	AVG	19.00	18.96	21.99	23.98	-1.99	3.22	25.21	30.00	-4.79
	5310	62	CDD	AVG	11.36	11.33	14.36	23.98	-9.62	3.22	17.58	30.00	-12.42
	5510	102	CDD	AVG	12.46	12.22	15.35	23.98	-8.63	4.57	19.92	30.00	-10.08
	5550	110	CDD	AVG	17.95	17.87	20.92	23.98	-3.06	4.57	25.49	30.00	-4.51
	5670	134	CDD	AVG	15.80	15.94	18.88	23.98	-5.10	4.57	23.45	30.00	-6.55
	5710	142	CDD	AVG	19.35	19.27	22.32	23.98	-1.66	4.57	26.89	30.00	-3.11
	5755	151	CDD	AVG	19.47	19.46	22.48	30.00	-7.52	4.36	26.84	-	-
	5795	159	CDD	AVG	19.39	19.31	22.36	30.00	-7.64	4.36	26.72	-	-

Table 7-150. ISED CDD/SDM 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 1b	Summed						
	5190	38	CDD	AVG	12.35	12.34	15.36	-	-	3.96	19.32	23.01	-3.69
	5230	46	SDM	AVG	16.48	16.45	19.48	-	-	1.19	20.67	23.01	-2.34
	5270	54	CDD	AVG	18.92	18.74	21.84	23.98	-2.14	3.22	25.06	30.00	-4.94
	5310	62	CDD	AVG	10.42	10.43	13.44	23.98	-10.54	3.22	16.66	30.00	-13.34
	5510	102	CDD	AVG	11.92	11.99	14.97	23.98	-9.01	4.57	19.54	30.00	-10.46
	5550	110	CDD	AVG	16.96	16.83	19.91	23.98	-4.07	4.57	24.48	30.00	-5.52
	5670	134	CDD	AVG	13.75	13.89	16.83	23.98	-7.15	4.57	21.40	30.00	-8.60
	5710	142	CDD	AVG	19.47	19.45	22.47	23.98	-1.51	4.57	27.04	30.00	-2.96
	5755	151	CDD	AVG	19.43	19.46	22.46	30.00	-7.54	4.36	26.82	-	-
	5795	159	CDD	AVG	19.29	19.43	22.37	30.00	-7.63	4.36	26.73	-	-

Table 7-151. ISED CDD/SDM 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 1b	Summed						
	5210	42	CDD	AVG	13.98	13.82	16.91	-	-	3.96	20.87	23.01	-2.14
	5290	58	CDD	AVG	11.87	11.84	14.87	23.98	-9.11	3.22	18.09	30.00	-11.91
	5530	106	CDD	AVG	12.25	12.38	15.33	23.98	-8.65	4.57	19.90	30.00	-10.10
	5690	138	CDD	AVG	19.77	19.91	22.85	23.98	-1.13	4.57	27.42	30.00	-2.58
	5775	155	CDD	AVG	17.75	17.77	20.77	30.00	-9.23	4.36	25.13	-	-

Table 7-152. ISED CDD 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 1b	Summed						
	5210	42	CDD	AVG	13.37	13.32	16.36	-	-	3.96	20.32	23.01	-2.69
	5290	58	CDD	AVG	10.98	11.00	14.00	23.98	-9.98	3.22	17.22	30.00	-12.78
	5530	106	CDD	AVG	11.81	12.00	14.92	23.98	-9.06	4.57	19.49	30.00	-10.51
	5690	138	CDD	AVG	19.99	19.82	22.92	23.98	-1.06	4.57	27.49	30.00	-2.51
	5775	155	CDD	AVG	16.94	16.92	19.94	30.00	-10.06	4.36	24.30	-	-

Table 7-153. ISED CDD 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 1b	Summed						
	5210	42	CDD	AVG	13.08	13.09	16.10	-	-	3.96	20.06	23.01	-2.95
	5290	58	CDD	AVG	10.10	10.01	13.07	23.98	-10.91	3.22	16.29	30.00	-13.71
	5530	106	CDD	AVG	11.22	11.21	14.23	23.98	-9.75	4.57	18.80	30.00	-11.20
	5690	138	CDD	AVG	19.90	19.94	22.93	23.98	-1.05	4.57	27.50	30.00	-2.50
	5775	155	CDD	AVG	16.34	16.45	19.41	30.00	-10.59	4.36	23.77	-	-

Table 7-154. ISED CDD 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 119 of 534	

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 1b	Summed						
	5210	42	CDD	AVG	13.37	13.46	16.43	-	-	3.96	20.39	23.01	-2.62
	5290	58	CDD	AVG	11.49	11.28	14.40	23.98	-9.58	3.22	17.62	30.00	-12.38
	5530	106	CDD	AVG	11.48	11.33	14.42	23.98	-9.56	4.57	18.99	30.00	-11.01
	5690	138	CDD	AVG	19.93	19.77	22.86	23.98	-1.12	4.57	27.43	30.00	-2.57
	5775	155	CDD	AVG	17.41	17.39	20.41	30.00	-9.59	4.36	24.77	-	-

Table 7-155. ISED CDD 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 1b	Summed						
	5210	42	CDD	AVG	12.93	13.00	15.98	-	-	3.96	19.94	23.01	-3.07
	5290	58	CDD	AVG	10.83	10.89	13.87	23.98	-10.11	3.22	17.09	30.00	-12.91
	5530	106	CDD	AVG	10.96	10.81	13.90	23.98	-10.08	4.57	18.47	30.00	-11.53
	5690	138	CDD	AVG	19.95	19.98	22.98	23.98	-1.00	4.57	27.55	30.00	-2.45
	5775	155	CDD	AVG	16.47	16.39	19.44	30.00	-10.56	4.36	23.80	-	-

Table 7-156. ISED CDD 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 3c	Antenna 1b	Summed						
	5210	42	CDD	AVG	12.11	12.34	15.24	-	-	3.96	19.20	23.01	-3.81
	5290	58	CDD	AVG	10.22	10.04	13.14	23.98	-10.84	3.22	16.36	30.00	-13.64
	5530	106	CDD	AVG	9.93	9.90	12.93	23.98	-11.05	4.57	17.50	30.00	-12.50
	5690	138	CDD	AVG	19.87	19.95	22.92	23.98	-1.06	4.57	27.49	30.00	-2.51
	5775	155	CDD	AVG	16.49	16.33	19.42	30.00	-10.58	4.36	23.78	-	-

Table 7-157. ISED CDD 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 120 of 534

Note:

Per ANSI C63.10-2013 and KDB 662911 v02r01 Section E1), the conducted powers at Antenna 3c and Antenna 3a were first measured separately during CDD/SDM transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

Per ANSI C63.10-2013 Section 14.4.3, the uncorrelated directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10}) / N_{ANT}] \text{ dBi}$$

Sample CDD/SDM Calculation:

At 5180MHz in 802.11n (20MHz BW) mode, the average conducted output power was measured to be 16.95 dBm for Antenna 3c and 16.94 dBm for Antenna 3a.

$$\text{Antenna 3c} + \text{Antenna 3a} = \text{CDD/SDM}$$

$$(16.95 \text{ dBm} + 16.94 \text{ dBm}) = (49.55 \text{ mW} + 49.43 \text{ mW}) = 98.98 \text{ mW} = 19.96 \text{ dBm}$$

Sample e.i.r.p. Calculation:

At 5180MHz in 802.11n (20MHz BW) mode, the average MIMO conducted power was calculated to be 19.96 dBm with directional gain of 4.69 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$19.96 \text{ dBm} + 4.69 \text{ dBi} = 24.65 \text{ dBm}$$

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 121 of 534

V 10.5 12/15/2021

7.5 Maximum Power Spectral Density – 802.11a/n/ac/ax(SU)

§15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, was used to measure the power spectral density.

In the 5.15 – 5.25GHz, 5.25 – 5.35GHz, 5.47 – 5.725GHz bands, the maximum permissible power spectral density is 11dBm/MHz.

In the 5.15 – 5.25GHz band, the e.i.r.p. spectral density shall not exceed 10 dBm in any 1 MHz band.

In the 5.725 – 5.850GHz band, the maximum permissible power spectral density is 30dBm/500kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.2.2
KDB 789033 D02 v02r01 – Section F
ANSI C63.10-2013 – Section 14.3.2.2 Measure-and-Sum Technique
KDB 662911 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span}/\text{RBW})$
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes

1. The data rates have been classified into three different groups; low data rate, middle data rate, and high data rate. All three data rate groups of data rate have been investigated and only the worst case data rate per group is reported.
2. Low, mid, and high channels were tested and tabular data has been reported. Only mid channel psd plots have been reported.

FCC ID: BCGA2757 IC: 579C-A2757		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 122 of 534

V 10.5 12/15/2021

7.5.1 Antenna 3c Power Spectral Density Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	n (20MHz)	6.5/7.2 (MCS0)	8.94	11.0	-2.06
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	10.45	11.0	-0.55
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	10.06	11.0	-0.94
	5180	36	ax (SU) (20MHz)	8/8.6 (MCS0)	8.07	11.0	-2.94
	5200	40	ax (SU) (20MHz)	8/8.6 (MCS0)	10.01	11.0	-0.99
	5240	48	ax (SU) (20MHz)	8/8.6 (MCS0)	9.81	11.0	-1.19
	5190	38	n (40MHz)	13.5/15 (MCS0)	4.96	11.0	-6.04
	5230	46	n (40MHz)	13.5/15 (MCS0)	7.15	11.0	-3.85
	5190	38	ax (SU) (40MHz)	16/17.2 (MCS0)	2.86	11.0	-8.14
	5230	46	ax (SU) (40MHz)	16/17.2 (MCS0)	5.90	11.0	-5.10
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	1.10	11.0	-9.90
	5210	42	ax (SU) (80MHz)	34/36 (MCS0)	-0.96	11.0	-11.96
Band 2A	5260	52	n (20MHz)	6.5/7.2 (MCS0)	9.78	11.0	-1.22
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	10.10	11.0	-0.90
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	8.98	11.0	-2.02
	5260	52	ax (SU) (20MHz)	8/8.6 (MCS0)	9.70	11.0	-1.31
	5280	56	ax (SU) (20MHz)	8/8.6 (MCS0)	9.77	11.0	-1.24
	5320	64	ax (SU) (20MHz)	8/8.6 (MCS0)	8.57	11.0	-2.43
	5270	54	n (40MHz)	13.5/15 (MCS0)	7.09	11.0	-3.91
	5310	62	n (40MHz)	13.5/15 (MCS0)	2.92	11.0	-8.08
	5270	54	ax (SU) (40MHz)	16/17.2 (MCS0)	5.72	11.0	-5.28
	5310	62	ax (SU) (40MHz)	16/17.2 (MCS0)	0.69	11.0	-10.31
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	-2.31	11.0	-13.31
	5290	58	ax (SU) (80MHz)	34/36 (MCS0)	-3.31	11.0	-14.31
Band 2C	5500	100	n (20MHz)	6.5/7.2 (MCS0)	9.15	11.0	-1.85
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	9.98	11.0	-1.02
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	9.36	11.0	-1.64
	5500	100	ax (SU) (20MHz)	8/8.6 (MCS0)	7.83	11.0	-3.17
	5580	116	ax (SU) (20MHz)	8/8.6 (MCS0)	9.63	11.0	-1.37
	5720	144	ax (SU) (20MHz)	8/8.6 (MCS0)	9.00	11.0	-2.00
	5510	102	n (40MHz)	13.5/15 (MCS0)	3.02	11.0	-7.98
	5550	110	n (40MHz)	13.5/15 (MCS0)	6.96	11.0	-4.04
	5710	142	n (40MHz)	13.5/15 (MCS0)	6.12	11.0	-4.88
	5510	102	ax (SU) (40MHz)	16/17.2 (MCS0)	1.07	11.0	-9.93
	5550	110	ax (SU) (40MHz)	16/17.2 (MCS0)	5.45	11.0	-5.55
	5710	142	ax (SU) (40MHz)	16/17.2 (MCS0)	4.84	11.0	-6.16
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	-0.21	11.0	-11.21
	5610*	122	ac (80MHz)	29.3/32.5 (MCS0)	2.27	11.0	-8.73
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	4.17	11.0	-6.83
	5530	106	ax (SU) (80MHz)	34/36 (MCS0)	-2.77	11.0	-13.77
	5610*	122	ax (SU) (80MHz)	34/36 (MCS0)	-0.07	11.0	-11.07
	5690	138	ax (SU) (80MHz)	34/36 (MCS0)	2.90	11.0	-8.10

Table 7-158. Bands 1, 2A, 2C Power Spectral Density Measurements Antenna 3c (Low Data Rate)

*TDWR channel is not supported for ISSED (denoted by a * next to the frequency)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 123 of 534

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	n (20MHz)	39/43.3 (MCS4)	8.53	11.0	-2.47
	5200	40	n (20MHz)	39/43.3 (MCS4)	10.24	11.0	-0.76
	5240	48	n (20MHz)	39/43.3 (MCS4)	9.87	11.0	-1.13
	5180	36	ax (SU) (20MHz)	49/51.6 (MCS4)	7.79	11.0	-3.21
	5200	40	ax (SU) (20MHz)	49/51.6 (MCS4)	10.46	11.0	-0.54
	5240	48	ax (SU) (20MHz)	49/51.6 (MCS4)	10.49	11.0	-0.52
	5190	38	n (40MHz)	81/90 (MCS4)	4.00	11.0	-7.00
	5230	46	n (40MHz)	81/90 (MCS4)	7.64	11.0	-3.36
	5190	38	ax (SU) (40MHz)	98/103.2 (MCS4)	2.68	11.0	-8.32
	5230	46	ax (SU) (40MHz)	98/103.2 (MCS4)	6.48	11.0	-4.52
	5210	42	ac (80MHz)	175.5/195 (MCS4)	1.02	11.0	-9.99
	5210	42	ax (SU) (80MHz)	204/216.2 (MCS4)	-0.21	11.0	-11.21
Band 2A	5260	52	n (20MHz)	39/43.3 (MCS4)	10.43	11.0	-0.57
	5280	56	n (20MHz)	39/43.3 (MCS4)	10.47	11.0	-0.53
	5320	64	n (20MHz)	39/43.3 (MCS4)	8.66	11.0	-2.34
	5260	52	ax (SU) (20MHz)	49/51.6 (MCS4)	10.30	11.0	-0.70
	5280	56	ax (SU) (20MHz)	49/51.6 (MCS4)	10.50	11.0	-0.50
	5320	64	ax (SU) (20MHz)	49/51.6 (MCS4)	8.48	11.0	-2.52
	5270	54	n (40MHz)	81/90 (MCS4)	7.63	11.0	-3.37
	5310	62	n (40MHz)	81/90 (MCS4)	2.31	11.0	-8.69
	5270	54	ax (SU) (40MHz)	98/103.2 (MCS4)	6.21	11.0	-4.79
	5310	62	ax (SU) (40MHz)	98/103.2 (MCS4)	1.15	11.0	-9.85
	5290	58	ac (80MHz)	175.5/195 (MCS4)	-1.68	11.0	-12.68
	5290	58	ax (SU) (80MHz)	204/216.2 (MCS4)	-2.97	11.0	-13.97
Band 2C	5500	100	n (20MHz)	39/43.3 (MCS4)	8.23	11.0	-2.78
	5580	116	n (20MHz)	39/43.3 (MCS4)	10.46	11.0	-0.54
	5720	144	n (20MHz)	39/43.3 (MCS4)	9.96	11.0	-1.05
	5500	100	ax (SU) (20MHz)	49/51.6 (MCS4)	7.80	11.0	-3.20
	5580	116	ax (SU) (20MHz)	49/51.6 (MCS4)	10.49	11.0	-0.51
	5720	144	ax (SU) (20MHz)	49/51.6 (MCS4)	9.58	11.0	-1.42
	5510	102	n (40MHz)	81/90 (MCS4)	2.96	11.0	-8.04
	5550	110	n (40MHz)	81/90 (MCS4)	7.52	11.0	-3.48
	5710	142	n (40MHz)	81/90 (MCS4)	7.04	11.0	-3.96
	5510	102	ax (SU) (40MHz)	98/103.2 (MCS4)	1.56	11.0	-9.44
	5550	110	ax (SU) (40MHz)	98/103.2 (MCS4)	6.19	11.0	-4.81
	5710	142	ax (SU) (40MHz)	98/103.2 (MCS4)	5.52	11.0	-5.49
	5530	106	ac (80MHz)	175.5/195 (MCS4)	-0.08	11.0	-11.08
	5610*	122	ac (80MHz)	175.5/195 (MCS4)	2.71	11.0	-8.29
	5690	138	ac (80MHz)	175.5/195 (MCS4)	4.68	11.0	-6.32
	5530	106	ax (SU) (80MHz)	204/216.2 (MCS4)	-1.97	11.0	-12.97
	5610*	122	ax (SU) (80MHz)	204/216.2 (MCS4)	0.66	11.0	-10.34
	5690	138	ax (SU) (80MHz)	204/216.2 (MCS4)	3.85	11.0	-7.16

Table 7-159. Bands 1, 2A, 2C Power Spectral Density Measurements Antenna 3c (Mid Data Rate)

*TDWR channel is not supported for ISSED (denoted by a * next to the frequency)

FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 124 of 534

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	n (20MHz)	65/72.2 (MCS7)	6.39	11.0	-4.61
	5200	40	n (20MHz)	65/72.2 (MCS7)	9.64	11.0	-1.36
	5240	48	n (20MHz)	65/72.2 (MCS7)	9.56	11.0	-1.44
	5180	36	ax (SU) (20MHz)	135/143.4 (MCS11)	5.91	11.0	-5.09
	5200	40	ax (SU) (20MHz)	135/143.4 (MCS11)	9.84	11.0	-1.16
	5240	48	ax (SU) (20MHz)	135/143.4 (MCS11)	9.56	11.0	-1.44
	5190	38	n (40MHz)	135/150 (MCS7)	1.20	11.0	-9.80
	5230	46	n (40MHz)	135/150 (MCS7)	6.66	11.0	-4.34
	5190	38	ax (SU) (40MHz)	271/286.8 (MCS11)	1.13	11.0	-9.87
	5230	46	ax (SU) (40MHz)	271/286.8 (MCS11)	6.07	11.0	-4.93
	5210	42	ac (80MHz)	390/433.3 (MCS9)	-0.36	11.0	-11.36
	5210	42	ax (SU) (80MHz)	567/600.5 (MCS11)	-1.00	11.0	-12.00
Band 2A	5260	52	n (20MHz)	65/72.2 (MCS7)	9.31	11.0	-1.69
	5280	56	n (20MHz)	65/72.2 (MCS7)	9.51	11.0	-1.49
	5320	64	n (20MHz)	65/72.2 (MCS7)	6.26	11.0	-4.75
	5260	52	ax (SU) (20MHz)	135/143.4 (MCS11)	9.43	11.0	-1.57
	5280	56	ax (SU) (20MHz)	135/143.4 (MCS11)	9.59	11.0	-1.41
	5320	64	ax (SU) (20MHz)	135/143.4 (MCS11)	6.30	11.0	-4.70
	5270	54	n (40MHz)	135/150 (MCS7)	6.56	11.0	-4.44
	5310	62	n (40MHz)	135/150 (MCS7)	1.05	11.0	-9.95
	5270	54	ax (SU) (40MHz)	271/286.8 (MCS11)	6.36	11.0	-4.64
	5310	62	ax (SU) (40MHz)	271/286.8 (MCS11)	0.22	11.0	-10.78
	5290	58	ac (80MHz)	390/433.3 (MCS9)	-3.48	11.0	-14.48
	5290	58	ax (SU) (80MHz)	567/600.5 (MCS11)	-3.57	11.0	-14.57
Band 2C	5500	100	n (20MHz)	65/72.2 (MCS7)	4.75	11.0	-6.25
	5580	116	n (20MHz)	65/72.2 (MCS7)	9.27	11.0	-1.73
	5720	144	n (20MHz)	65/72.2 (MCS7)	8.72	11.0	-2.28
	5500	100	ax (SU) (20MHz)	135/143.4 (MCS11)	4.64	11.0	-6.36
	5580	116	ax (SU) (20MHz)	135/143.4 (MCS11)	9.50	11.0	-1.50
	5720	144	ax (SU) (20MHz)	135/143.4 (MCS11)	8.63	11.0	-2.37
	5510	102	n (40MHz)	135/150 (MCS7)	0.17	11.0	-10.83
	5550	110	n (40MHz)	135/150 (MCS7)	5.64	11.0	-5.36
	5710	142	n (40MHz)	135/150 (MCS7)	5.52	11.0	-5.48
	5510	102	ax (SU) (40MHz)	271/286.8 (MCS11)	-0.24	11.0	-11.24
	5550	110	ax (SU) (40MHz)	271/286.8 (MCS11)	5.10	11.0	-5.90
	5710	142	ax (SU) (40MHz)	271/286.8 (MCS11)	5.86	11.0	-5.14
	5530	106	ac (80MHz)	390/433.3 (MCS9)	-2.07	11.0	-13.07
	5610*	122	ac (80MHz)	390/433.3 (MCS9)	-0.19	11.0	-11.19
	5690	138	ac (80MHz)	390/433.3 (MCS9)	4.12	11.0	-6.89
	5530	106	ax (SU) (80MHz)	567/600.5 (MCS11)	-2.85	11.0	-13.85
	5610*	122	ax (SU) (80MHz)	567/600.5 (MCS11)	-1.13	11.0	-12.13
	5690	138	ax (SU) (80MHz)	567/600.5 (MCS11)	3.40	11.0	-7.60


Table 7-160. Bands 1, 2A, 2C Power Spectral Density Measurements Antenna 3c (High Data Rate)

*TDWR channel is not supported for ISSED (denoted by a * next to the frequency)


FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 125 of 534

V 10.5 12/15/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

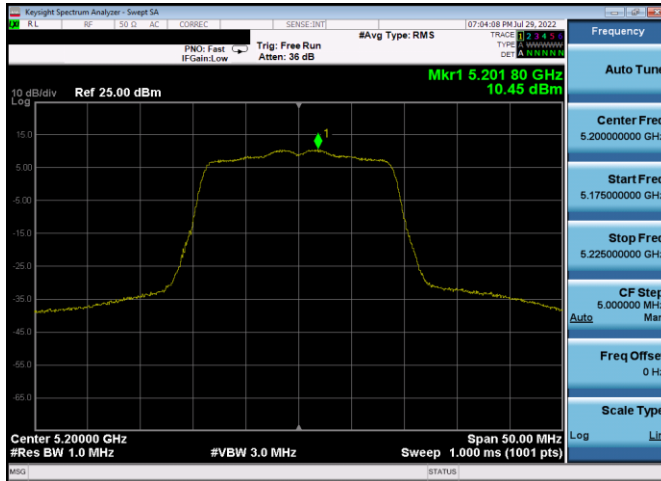


Plot 7-217. PSD Antenna 3c (20MHz BW 802.11n – Ch. 40, MCS0)

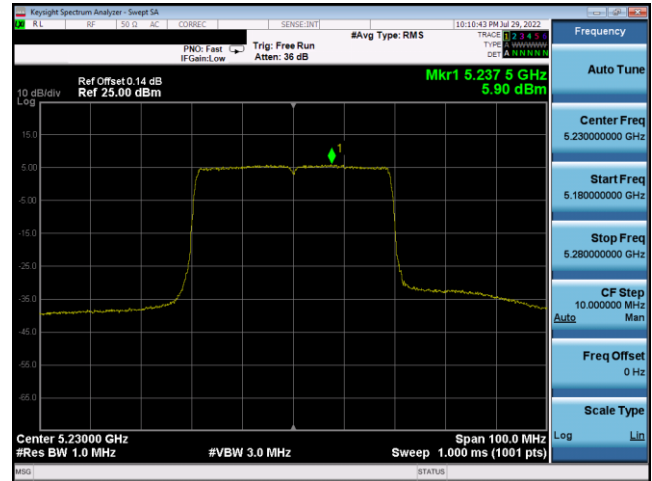


Plot 7-220. PSD Antenna 3c (40MHz BW 802.11ax(SU) – Ch. 46, MCS0)

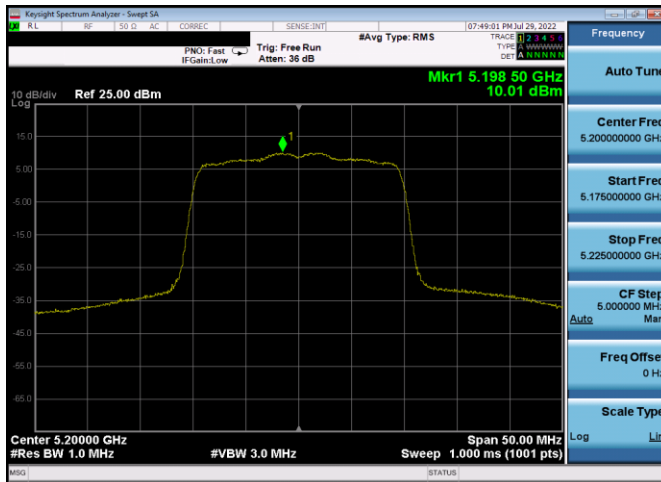


Plot 7-218. PSD Antenna 3c (20MHz BW 802.11ax(SU) – Ch. 40, MCS0)

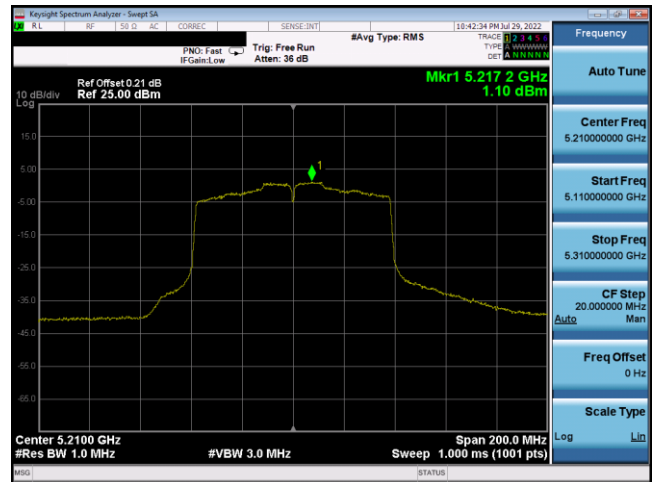

Plot 7-221. PSD Antenna 3c (80MHz BW 802.11ac – Ch. 42, MCS0)

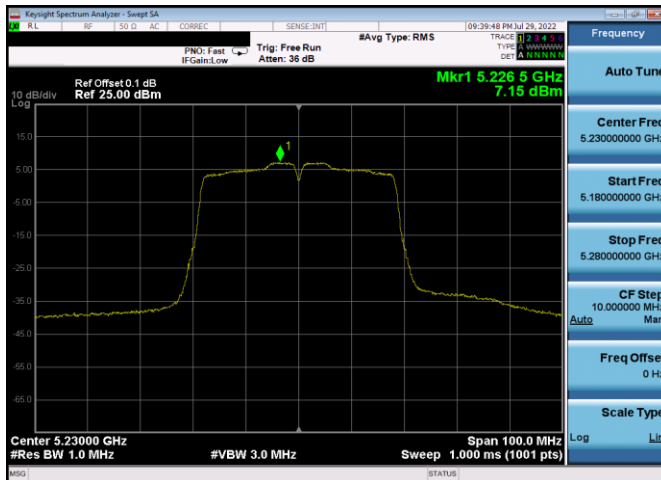


Plot 7-219. PSD Antenna 3c (40MHz BW 802.11n – Ch. 46, MCS0)

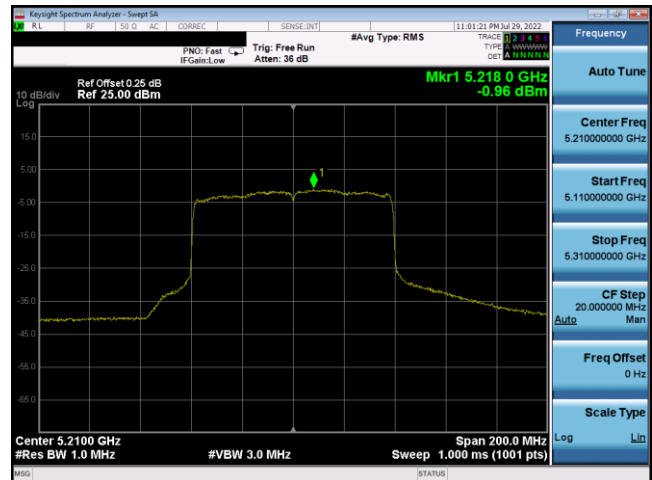


Plot 7-222. PSD Antenna 3c (80MHz BW 802.11ax(SU) – Ch. 42, MCS0)


FCC ID: BCGA2757 IC: 579C-A2757			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device		Page 126 of 534

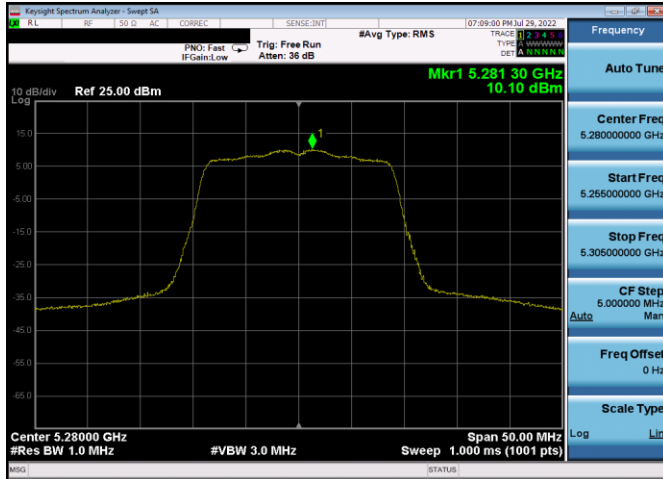


Plot 7-223. PSD Antenna 3c (20MHz BW 802.11n – Ch. 56, MCS0)

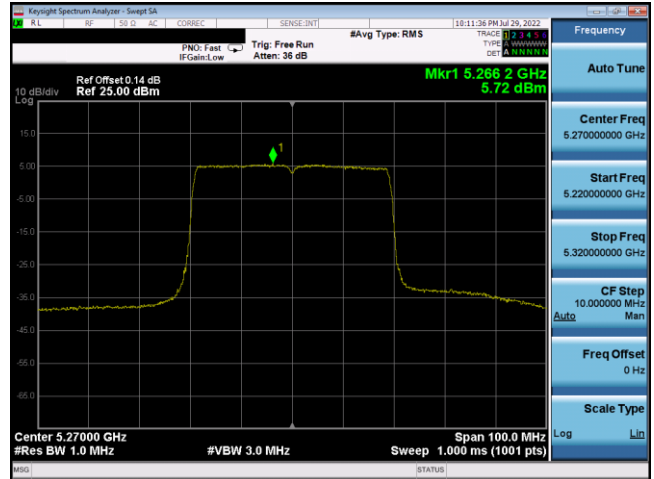


Plot 7-226. PSD Antenna 3c (40MHz BW 802.11ax(SU) – Ch. 54, MCS0)

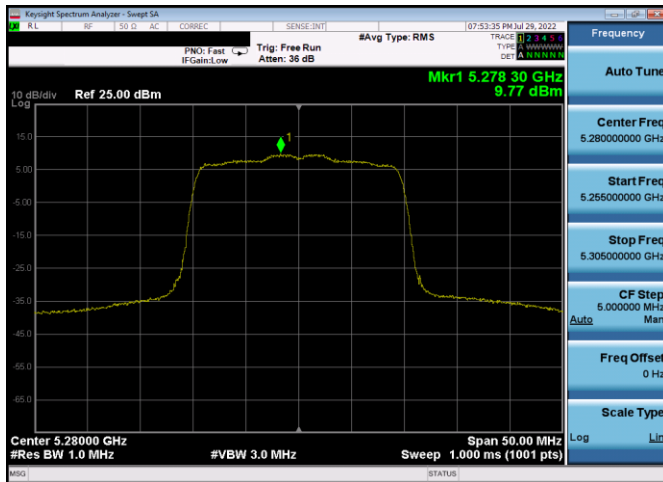


Plot 7-224. PSD Antenna 3c (20MHz BW 802.11ax(SU) – Ch. 56, MCS0)

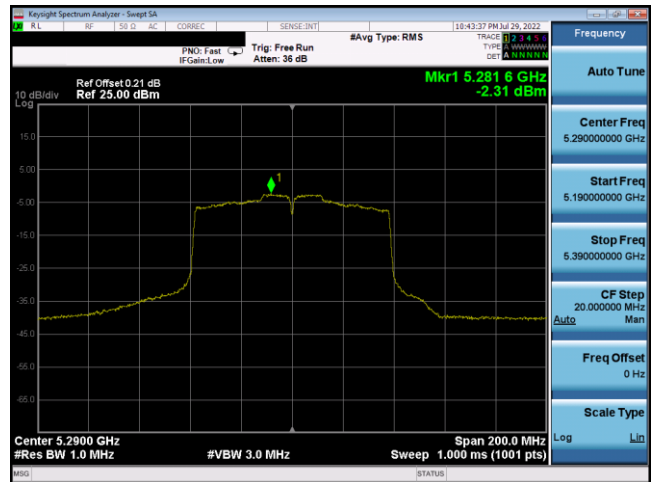

Plot 7-227. PSD Antenna 3c (80MHz BW 802.11ac – Ch. 58, MCS0)

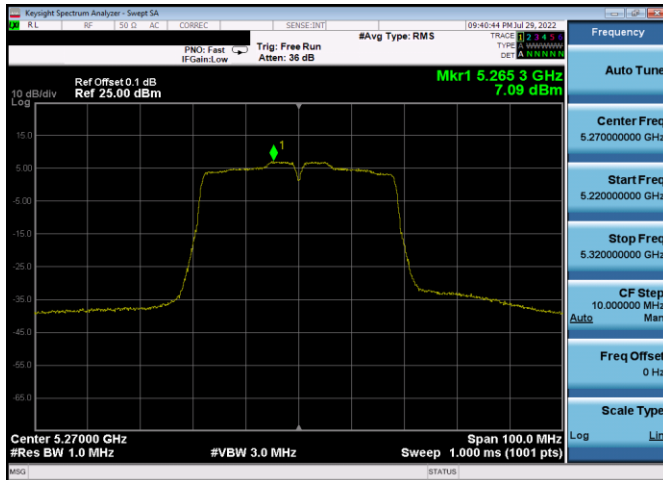


Plot 7-225. PSD Antenna 3c (40MHz BW 802.11n – Ch. 54, MCS0)

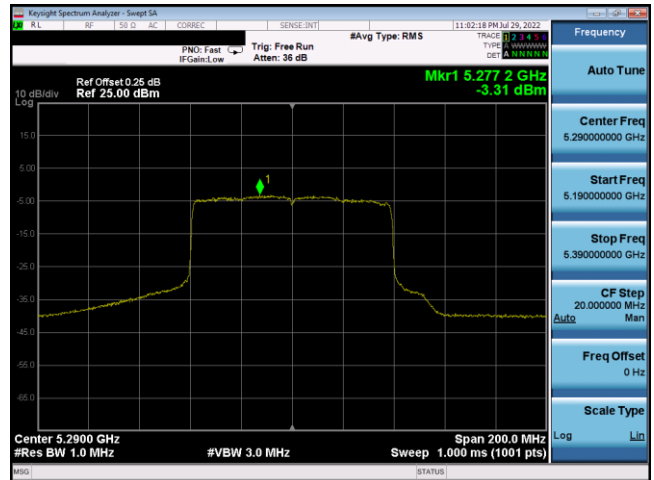


Plot 7-228. PSD Antenna 3c (80MHz BW 802.11ax(SU) – Ch. 58, MCS0)


FCC ID: BCGA2757 IC: 579C-A2757			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device		Page 127 of 534

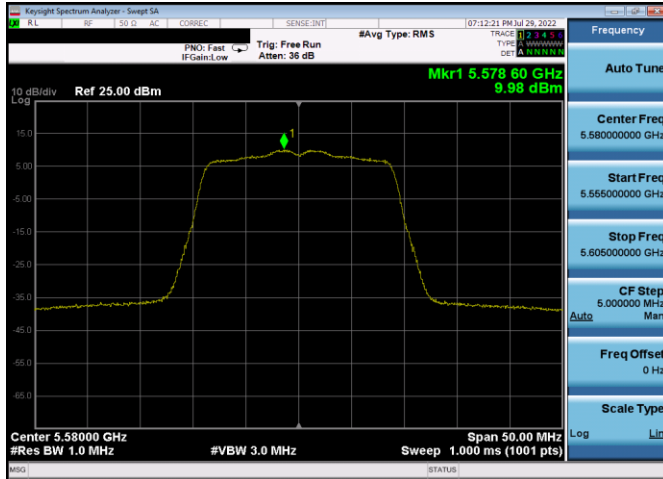


Plot 7-229. PSD Antenna 3c (20MHz BW 802.11n – Ch. 116, MCS0)

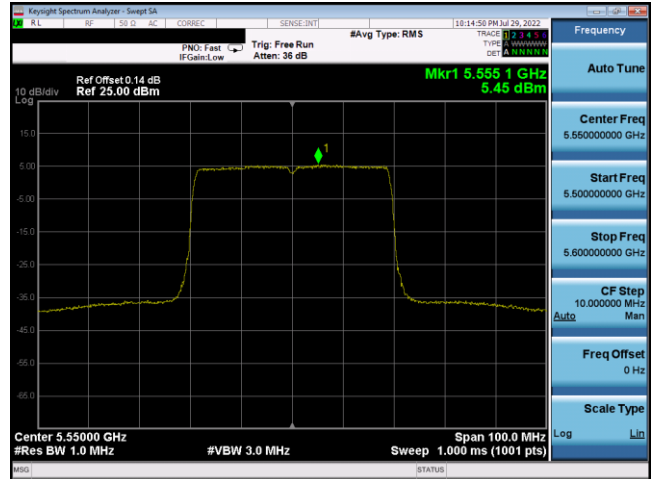


Plot 7-232. PSD Antenna 3c (40MHz BW 802.11ax(SU) – Ch. 110, MCS0)

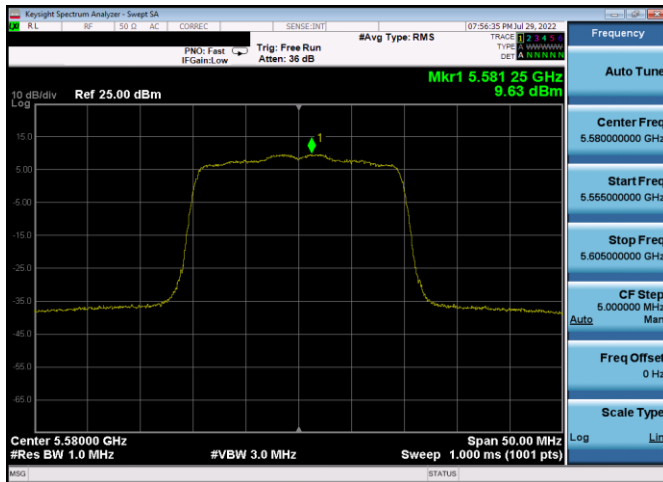


Plot 7-230. PSD Antenna 3c (20MHz BW 802.11ax(SU) – Ch. 116, MCS0)

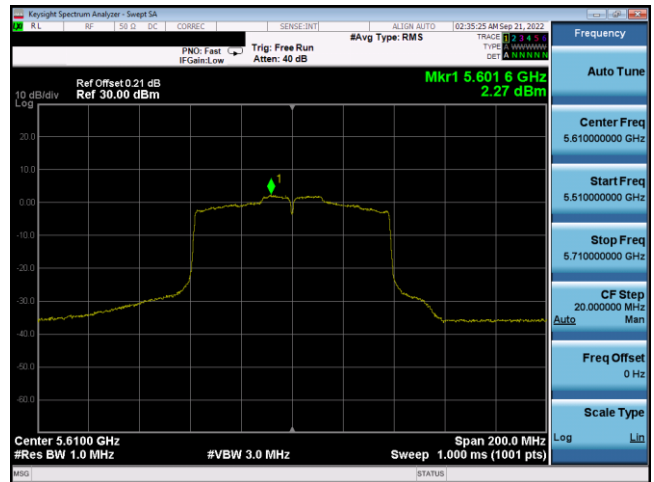

Plot 7-233. PSD Antenna 3c (80MHz BW 802.11ac – Ch. 122, MCS0)

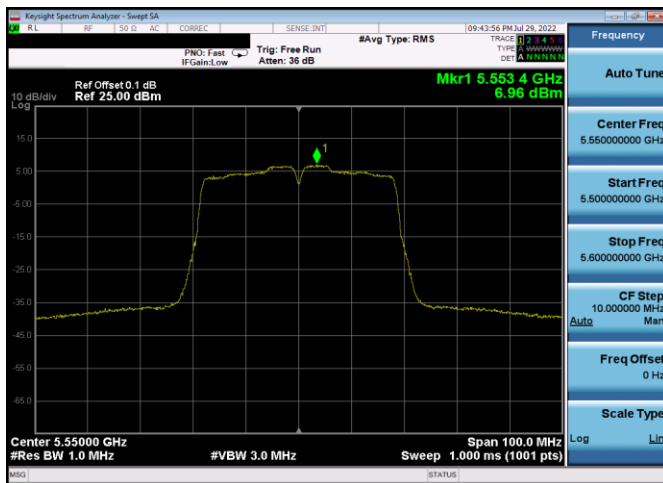


Plot 7-231. PSD Antenna 3c (40MHz BW 802.11n – Ch. 110, MCS0)

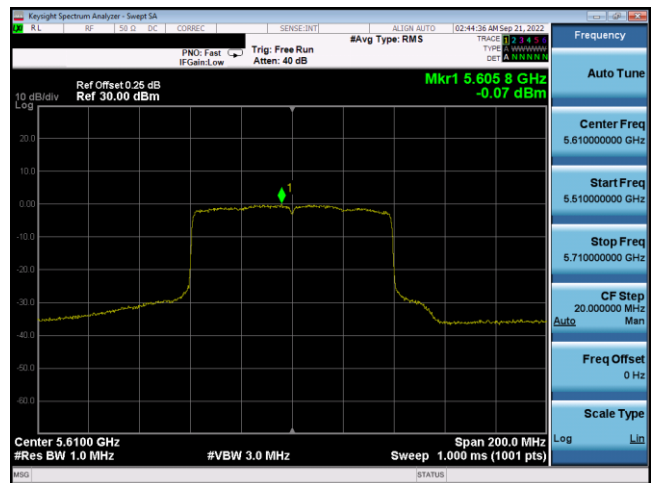


Plot 7-234. PSD Antenna 3c (80MHz BW 802.11ax(SU) – Ch. 122, MCS0)


FCC ID: BCGA2757 IC: 579C-A2757	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 128 of 534

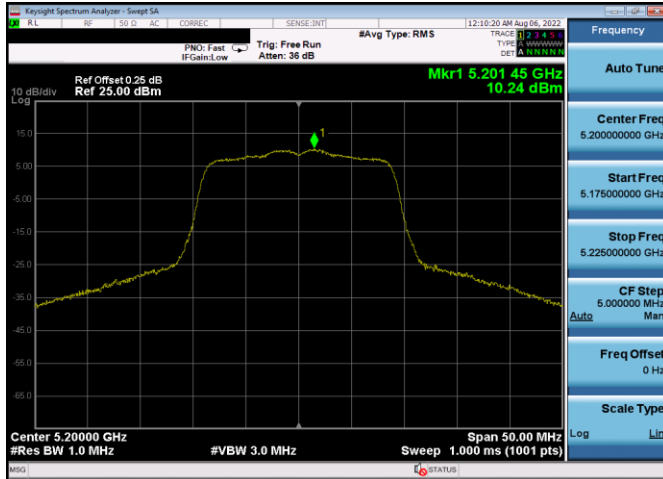


Plot 7-235. PSD Antenna 3c (20MHz BW 802.11n – Ch. 40, MCS4)

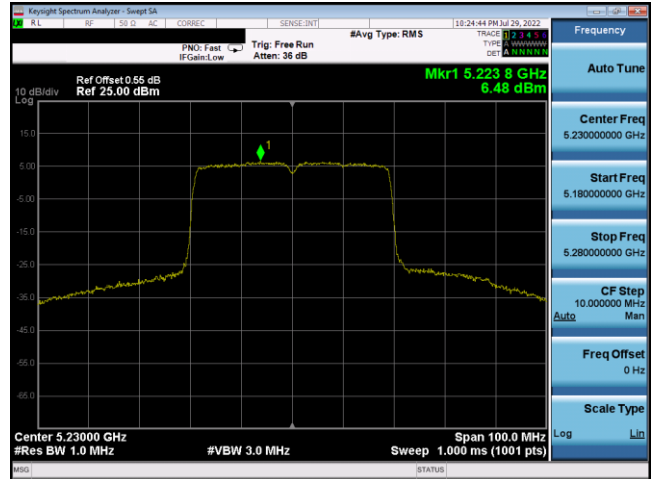


Plot 7-238. PSD Antenna 3c (40MHz BW 802.11ax(SU) – Ch. 46, MCS4)

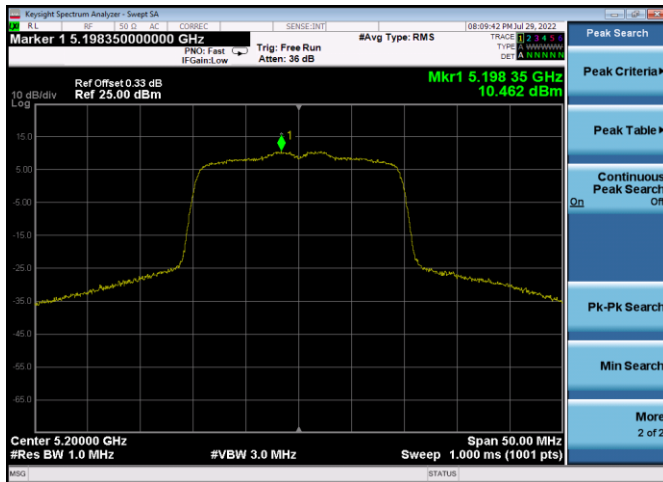


Plot 7-236. PSD Antenna 3c (20MHz BW 802.11ax(SU) – Ch. 40, MCS4)

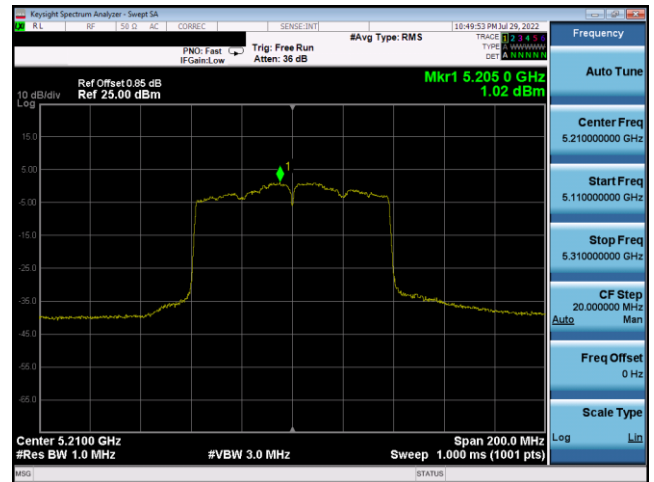

Plot 7-239. PSD Antenna 3c (80MHz BW 802.11ac – Ch. 42, MCS4)

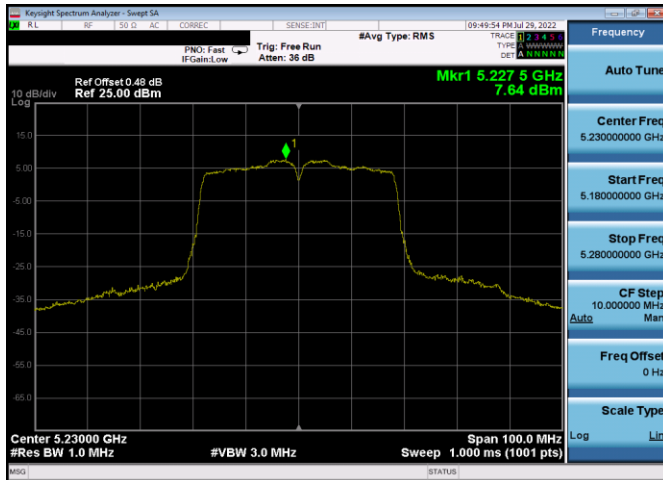


Plot 7-237. PSD Antenna 3c (40MHz BW 802.11n – Ch. 46, MCS4)

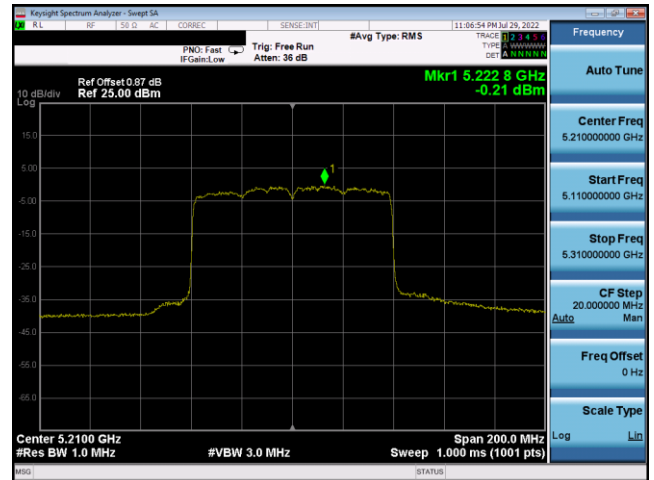


Plot 7-240. PSD Antenna 3c (80MHz BW 802.11ax(SU) – Ch. 42, MCS4)


FCC ID: BCGA2757 IC: 579C-A2757	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 129 of 534

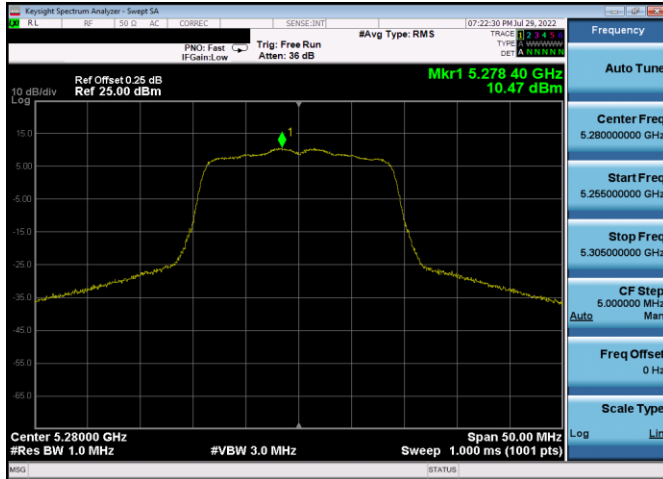


Plot 7-241. PSD Antenna 3c (20MHz BW 802.11n – Ch. 56, MCS4)

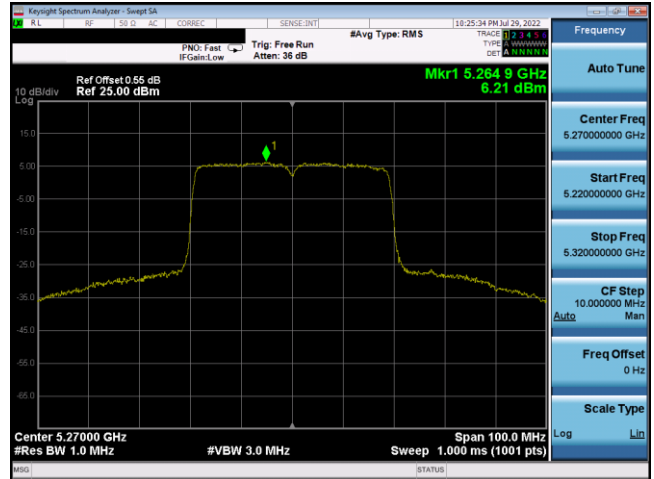


Plot 7-244. PSD Antenna 3c (40MHz BW 802.11ax(SU) – Ch. 54, MCS4)

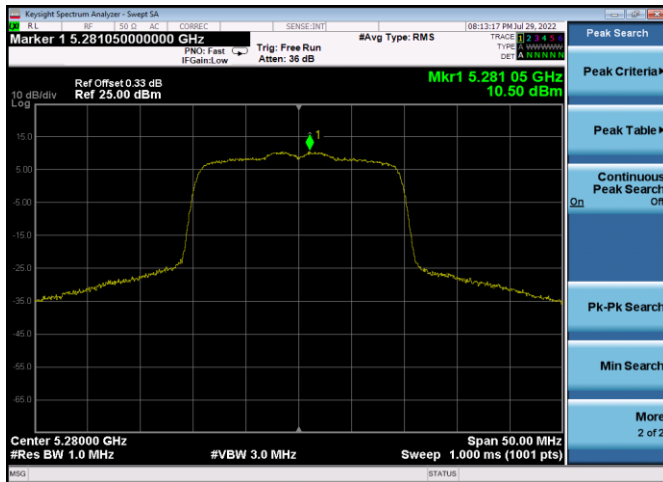


Plot 7-242. PSD Antenna 3c (20MHz BW 802.11ax(SU) – Ch. 56, MCS4)

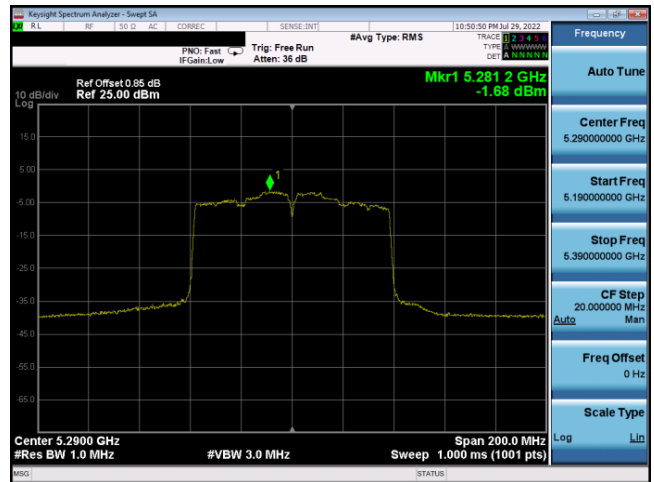

Plot 7-245. PSD Antenna 3c (80MHz BW 802.11ac – Ch. 58, MCS4)

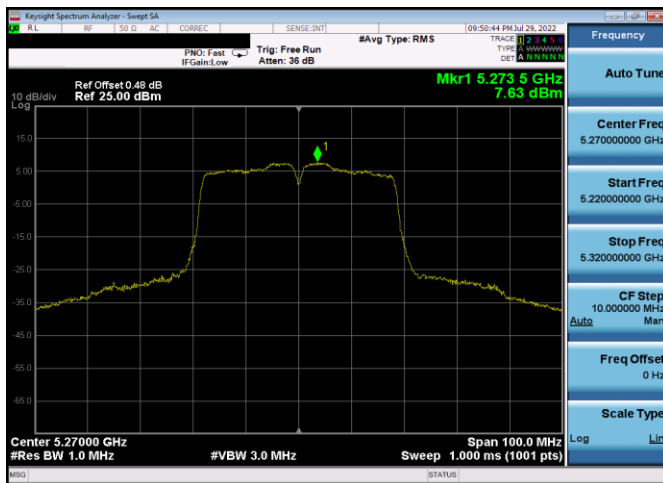


Plot 7-243. PSD Antenna 3c (40MHz BW 802.11n – Ch. 54, MCS4)

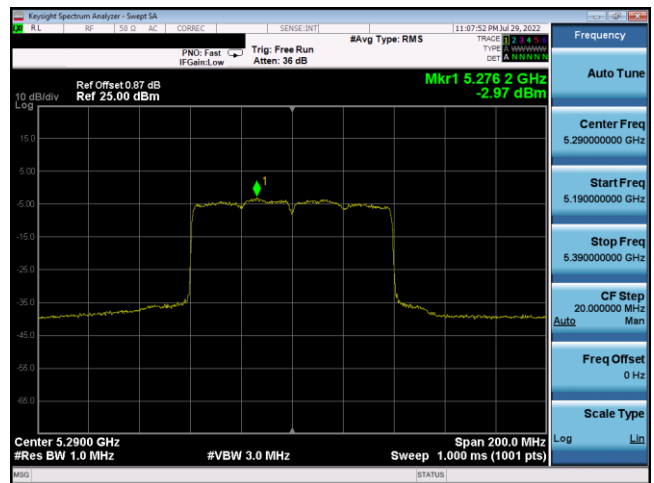


Plot 7-246. PSD Antenna 3c (80MHz BW 802.11ax(SU) – Ch. 58, MCS4)


FCC ID: BCGA2757 IC: 579C-A2757	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 130 of 534

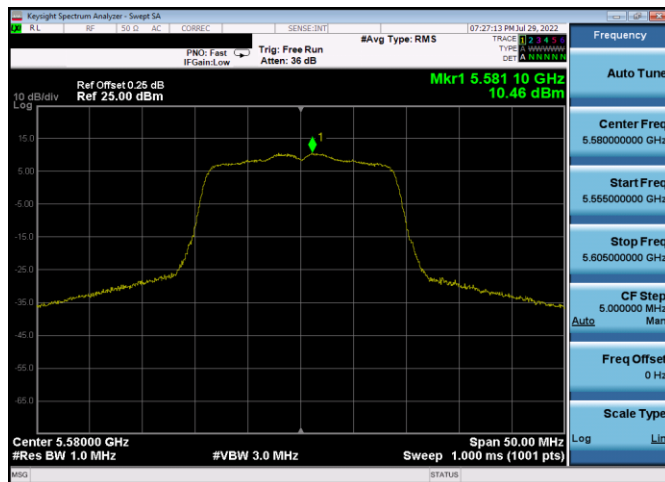


Plot 7-247. PSD Antenna 3c (20MHz BW 802.11n – Ch. 116, MCS4)

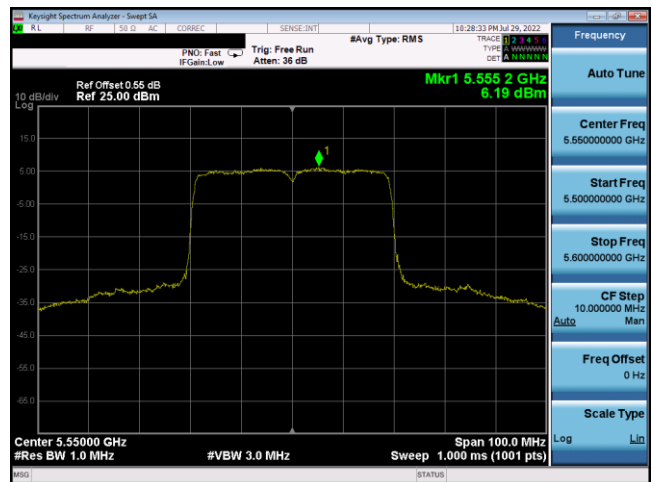


Plot 7-250. PSD Antenna 3c (40MHz BW 802.11ax(SU) – Ch. 110, MCS4)

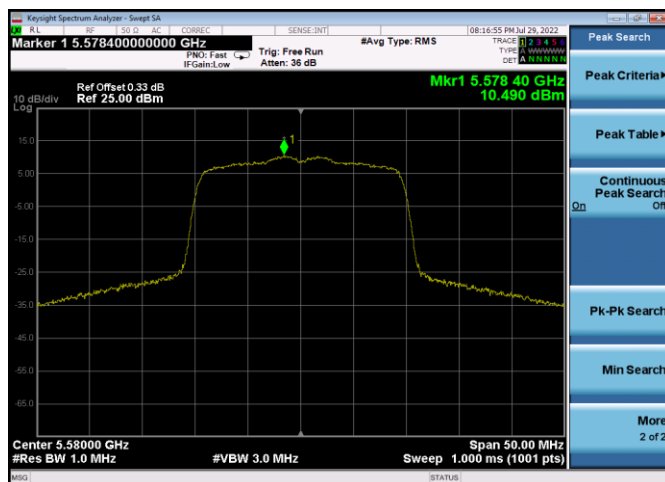


Plot 7-248. PSD Antenna 3c (20MHz BW 802.11ax(SU) – Ch. 116, MCS4)

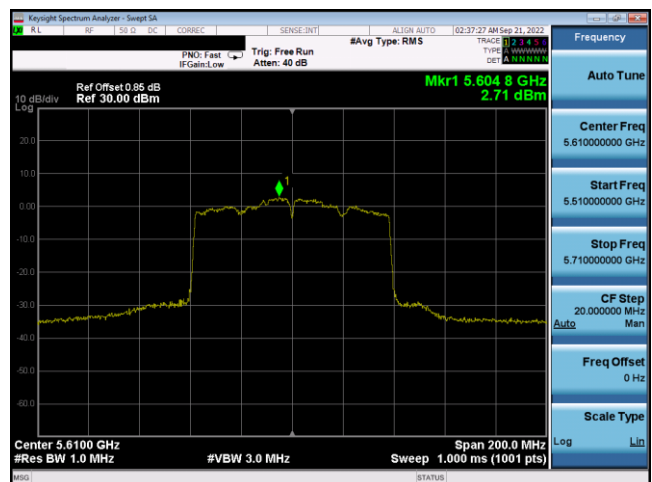

Plot 7-251. PSD Antenna 3c (80MHz BW 802.11ac – Ch. 122, MCS4)

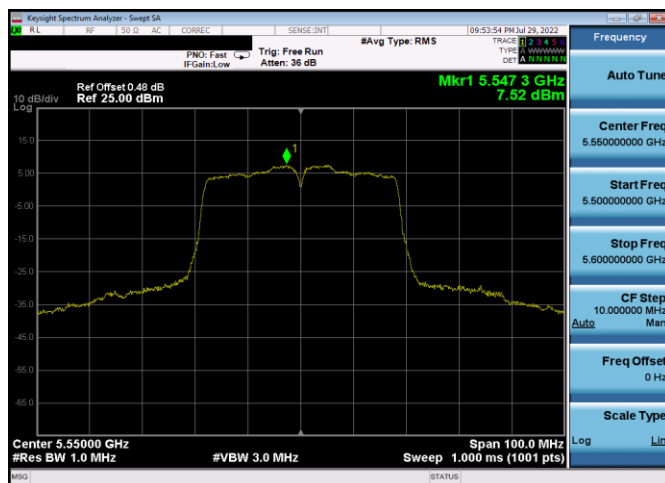


Plot 7-249. PSD Antenna 3c (40MHz BW 802.11n – Ch. 110, MCS4)

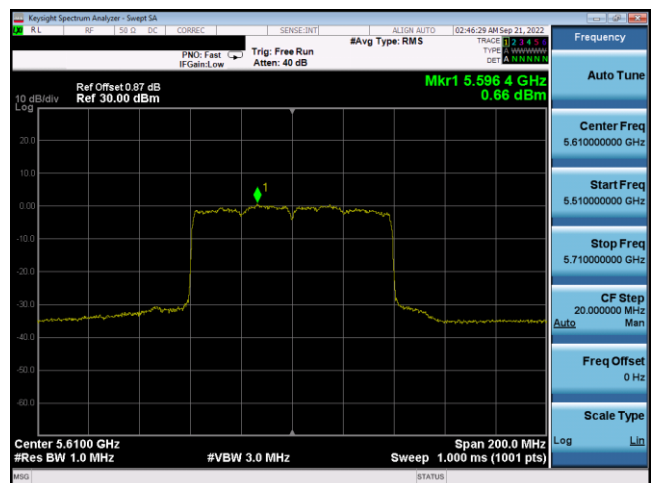


Plot 7-252. PSD Antenna 3c (80MHz BW 802.11ax(SU) – Ch. 122, MCS4)


FCC ID: BCGA2757 IC: 579C-A2757			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 131 of 534	

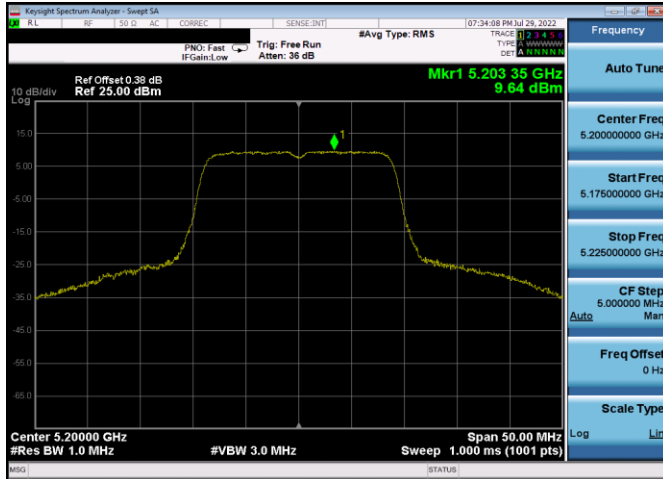


Plot 7-253. PSD Antenna 3c (20MHz BW 802.11n – Ch. 40, MCS7)

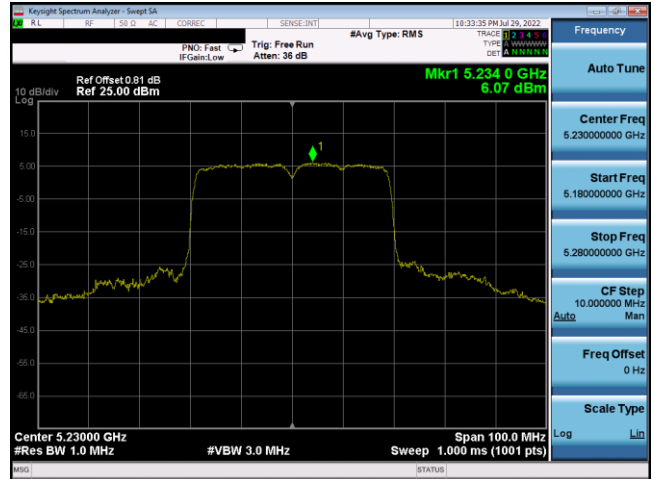


Plot 7-256. PSD Antenna 3c (40MHz BW 802.11ax(SU) – Ch. 46, MCS11)

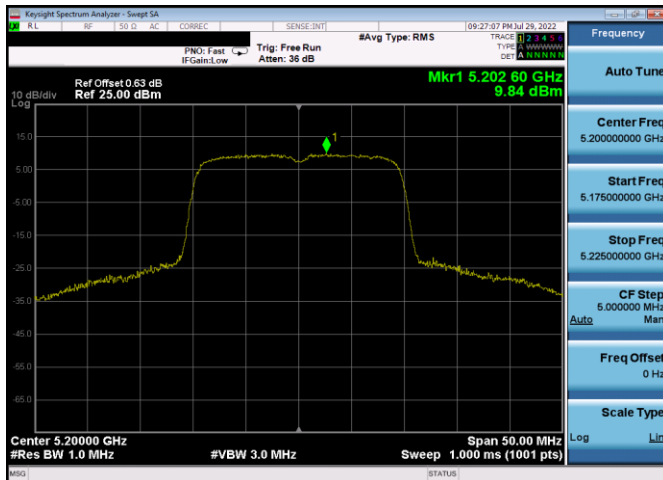


Plot 7-254. PSD Antenna 3c (20MHz BW 802.11ax(SU) – Ch. 40, MCS11)

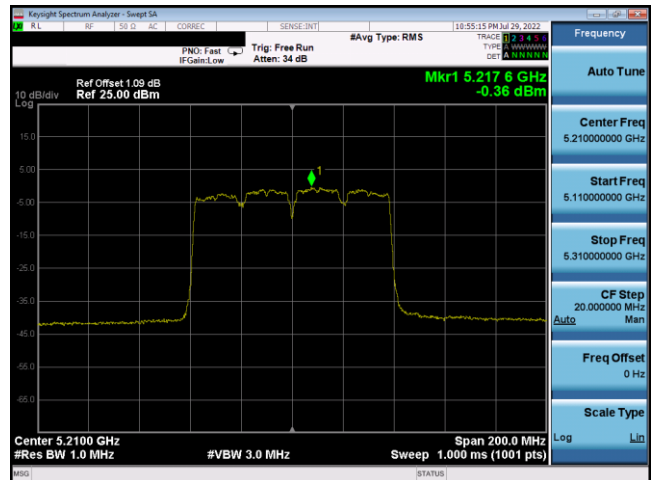

Plot 7-257. PSD Antenna 3c (80MHz BW 802.11ac – Ch. 42, MCS9)

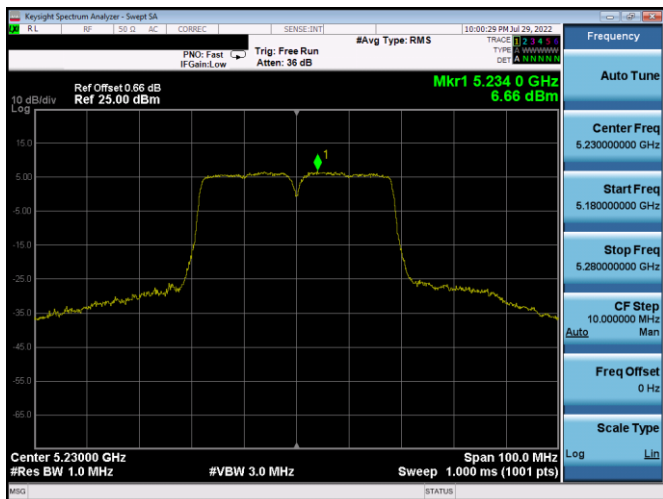

Plot 7-255. PSD Antenna 3c (40MHz BW 802.11n – Ch. 46, MCS7)

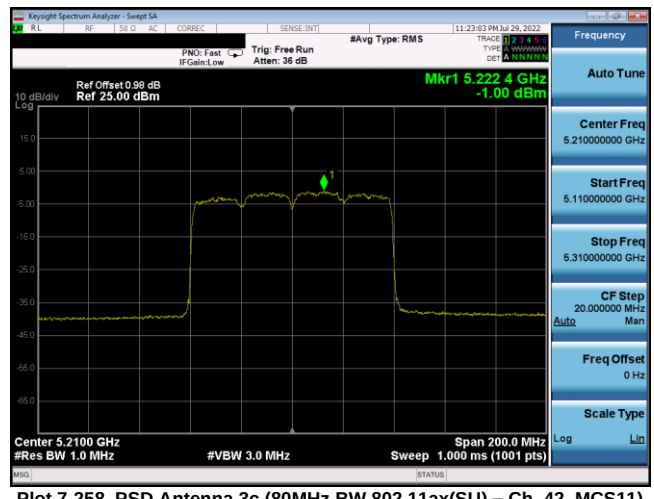

Plot 7-258. PSD Antenna 3c (80MHz BW 802.11ax(SU) – Ch. 42, MCS11)

FCC ID: BCGA2757 IC: 579C-A2757	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-16.BCG	Test Dates: 08/02/2022 – 09/14/2022	EUT Type: Tablet Device	Page 132 of 534