



Antenna 3a

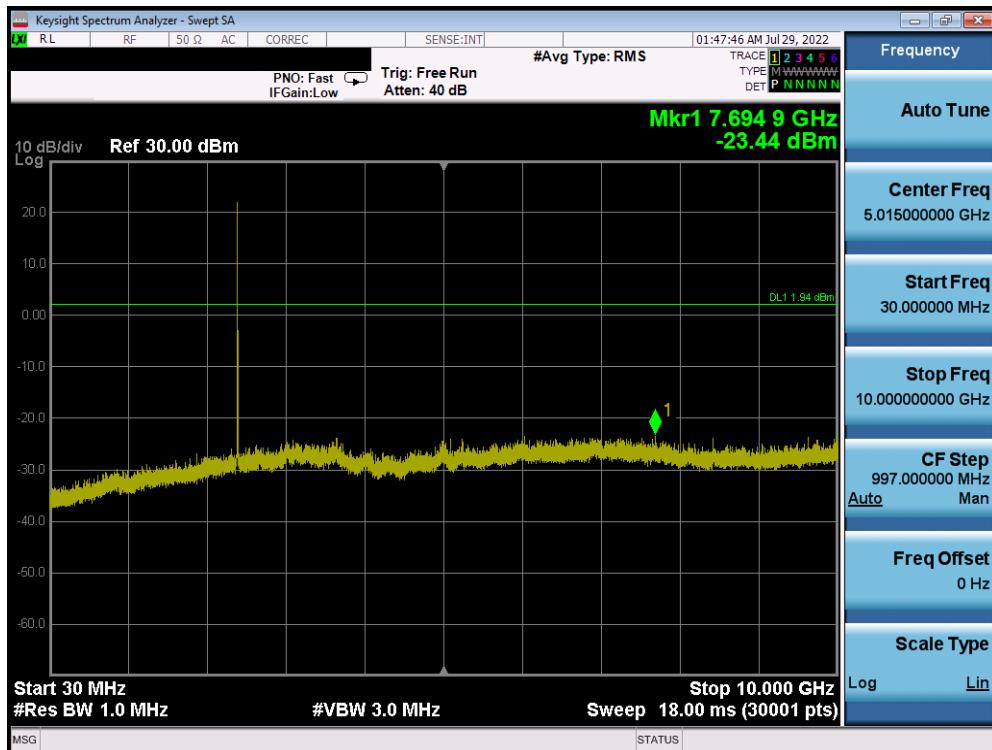


Plot 7-69. Conducted Spurious Plot Antenna 3a (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 1)

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 66 of 107

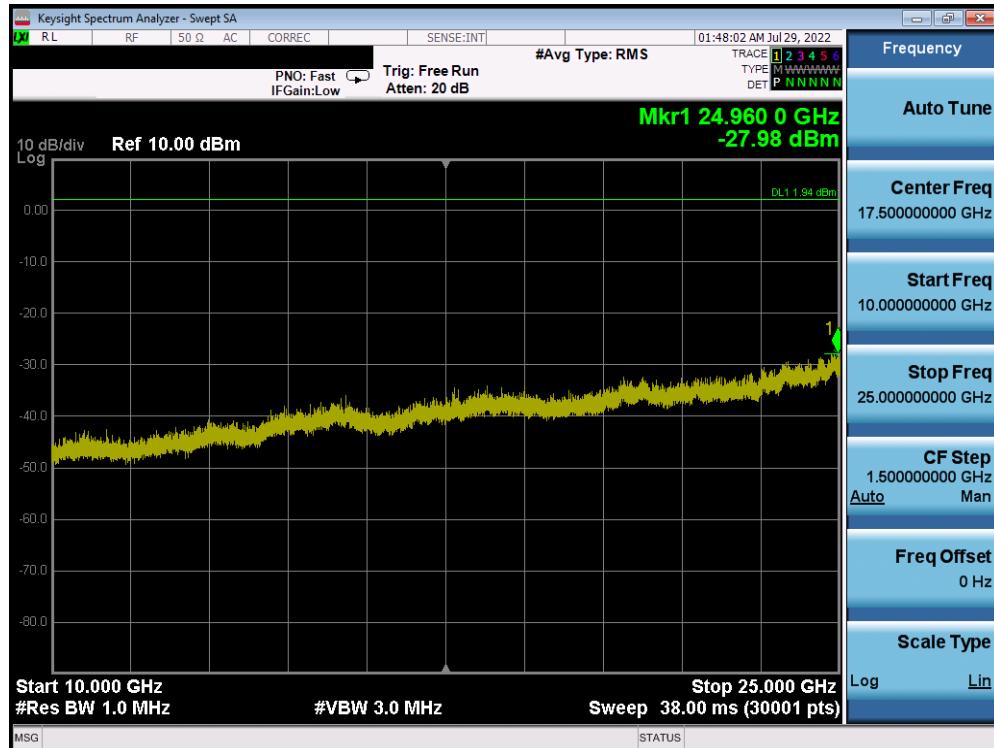


Plot 7-70. Conducted Spurious Plot Antenna 3a (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 1)

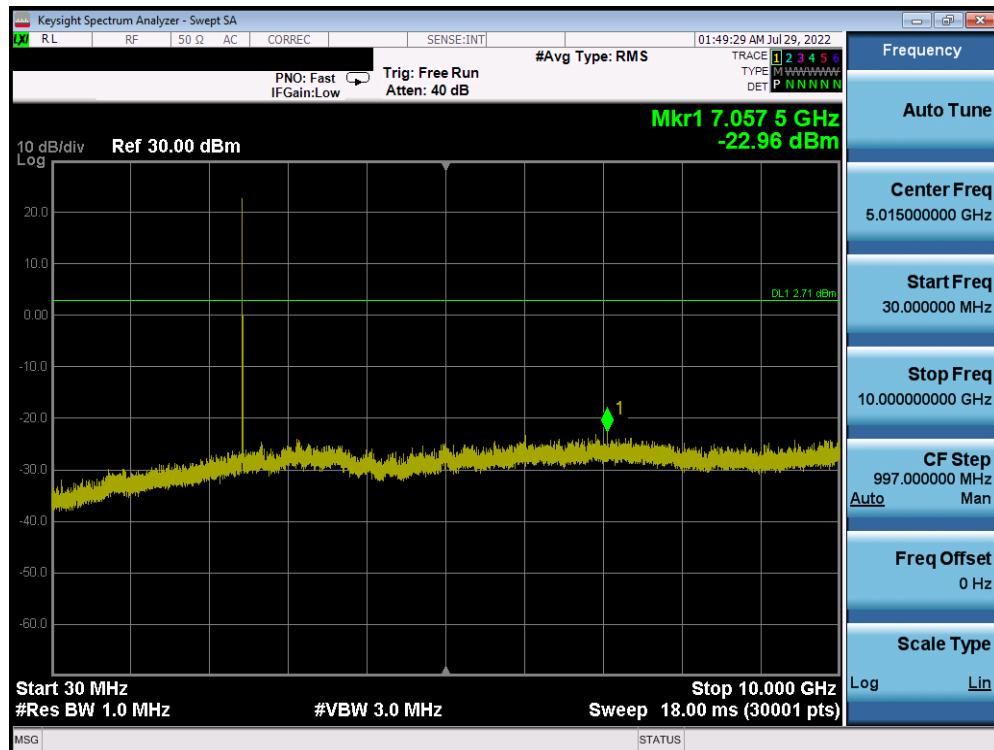


Plot 7-71. Conducted Spurious Plot Antenna 3a (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 38)

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 67 of 107

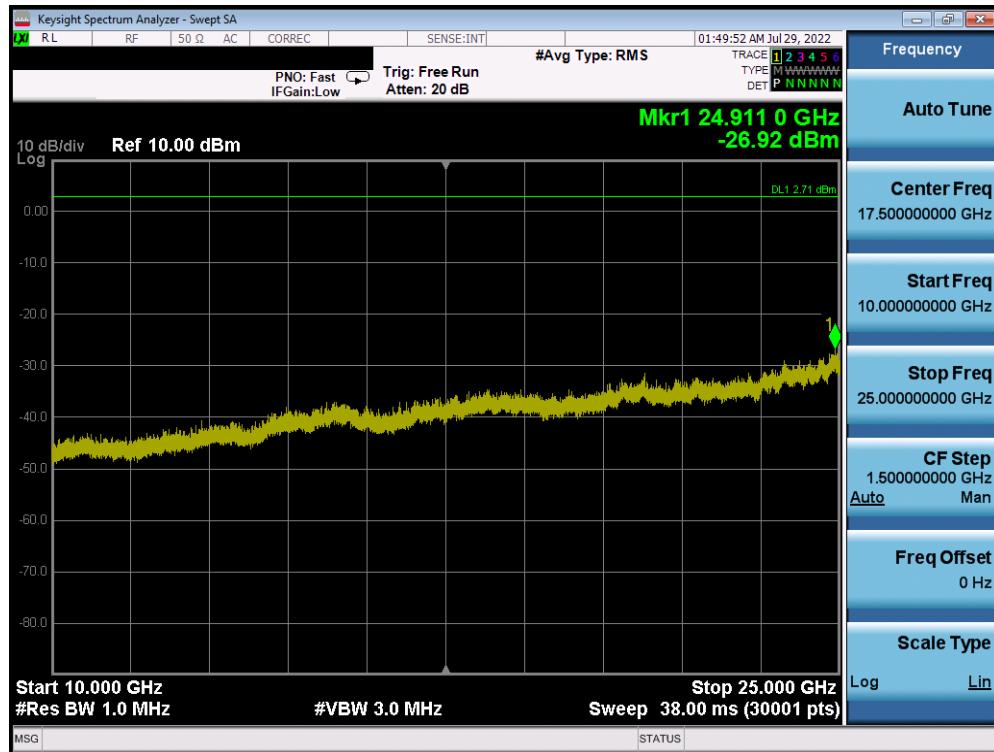


Plot 7-72. Conducted Spurious Plot Antenna 3a (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 38)

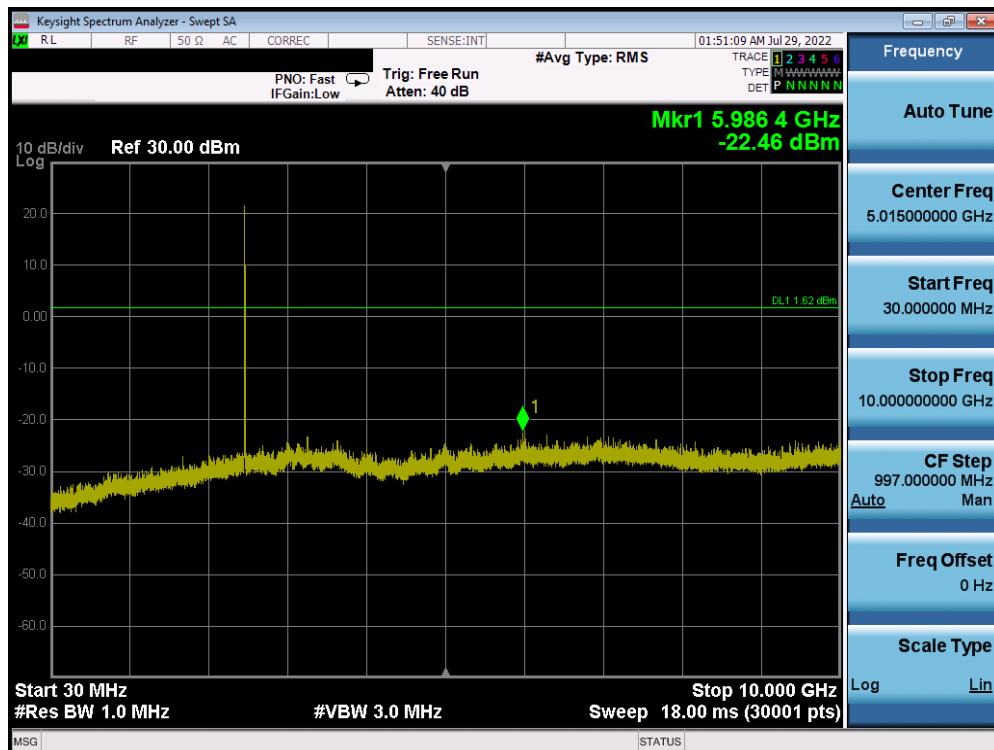


Plot 7-73. Conducted Spurious Plot Antenna 3a (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 73)

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 68 of 107

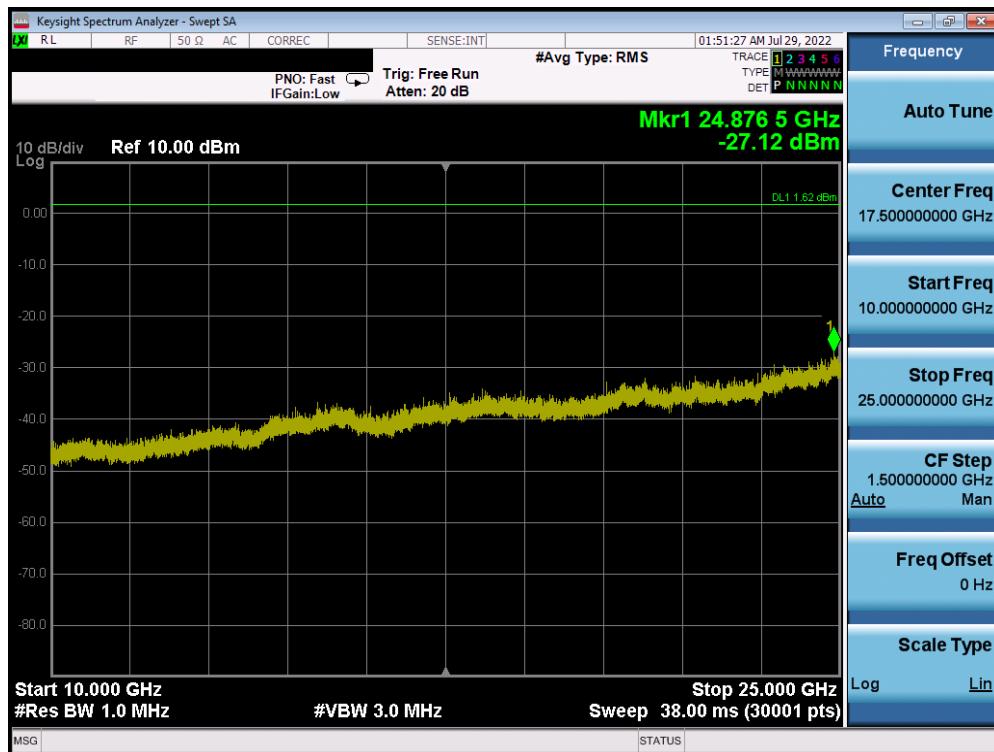


Plot 7-74. Conducted Spurious Plot Antenna 3a (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 73)


FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 69 of 107

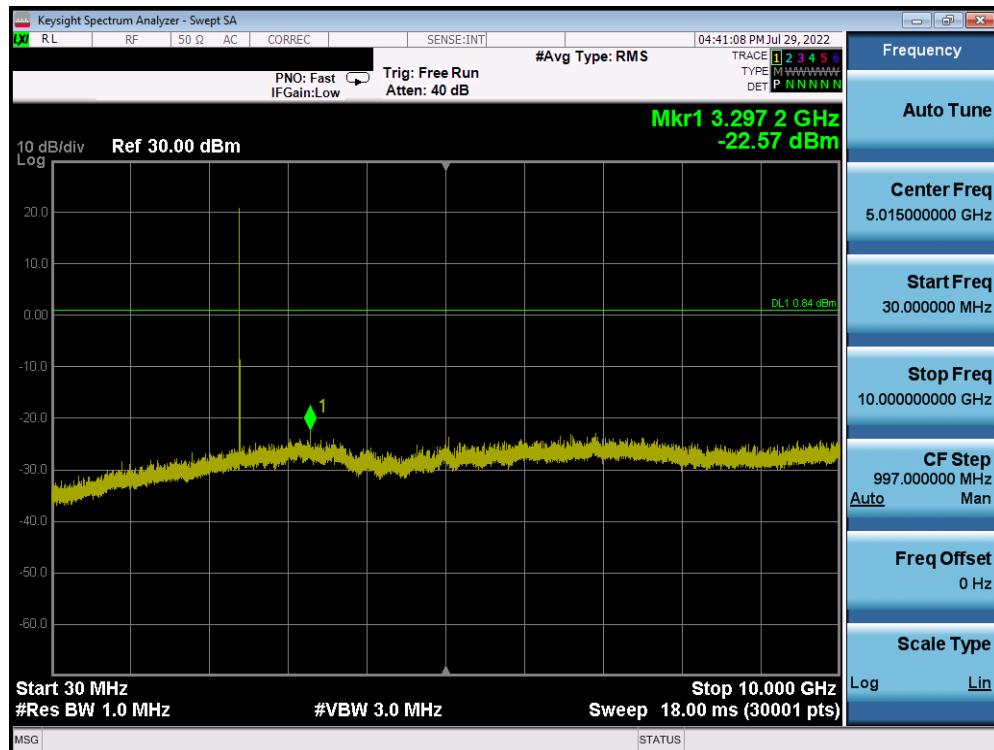Antenna 1a

Plot 7-75. Conducted Spurious Plot Antenna 1a (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 1)

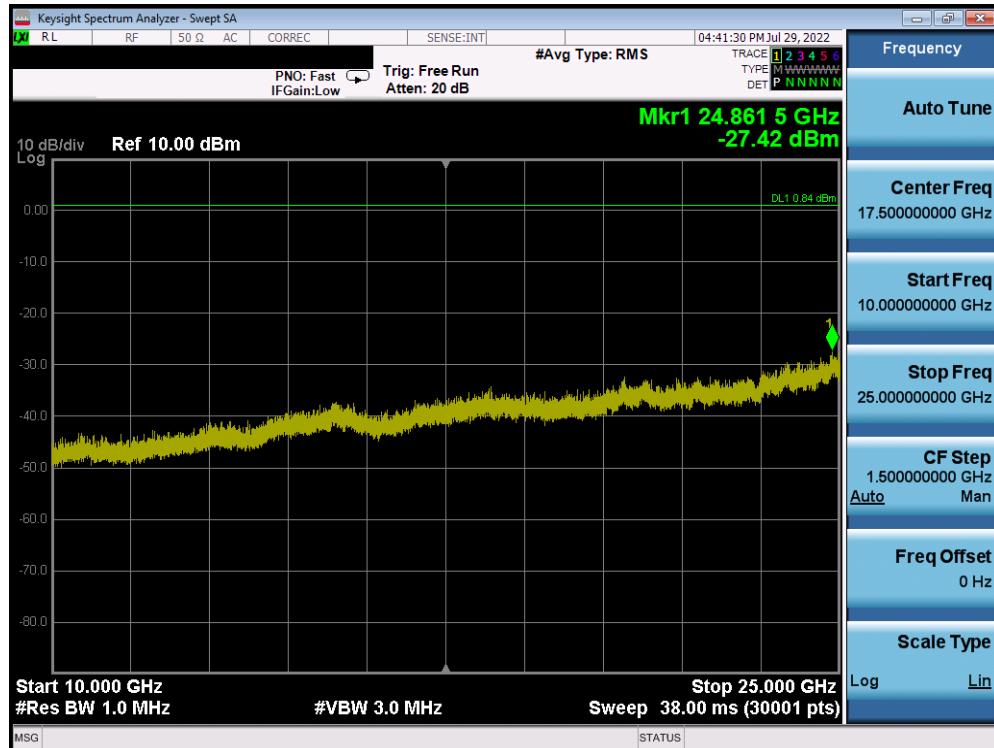FCC ID: BCGA2757 IC: 579C-A2757		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 70 of 107

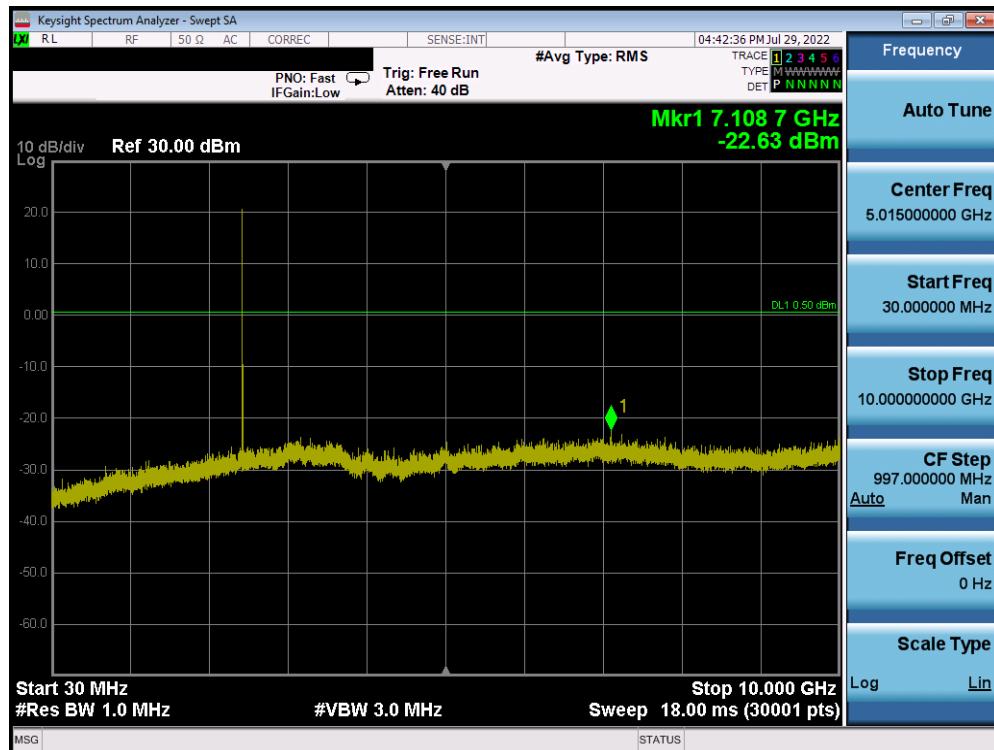


Plot 7-76. Conducted Spurious Plot Antenna 1a (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 1)




Plot 7-77. Conducted Spurious Plot Antenna 1a (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 38)

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 71 of 107

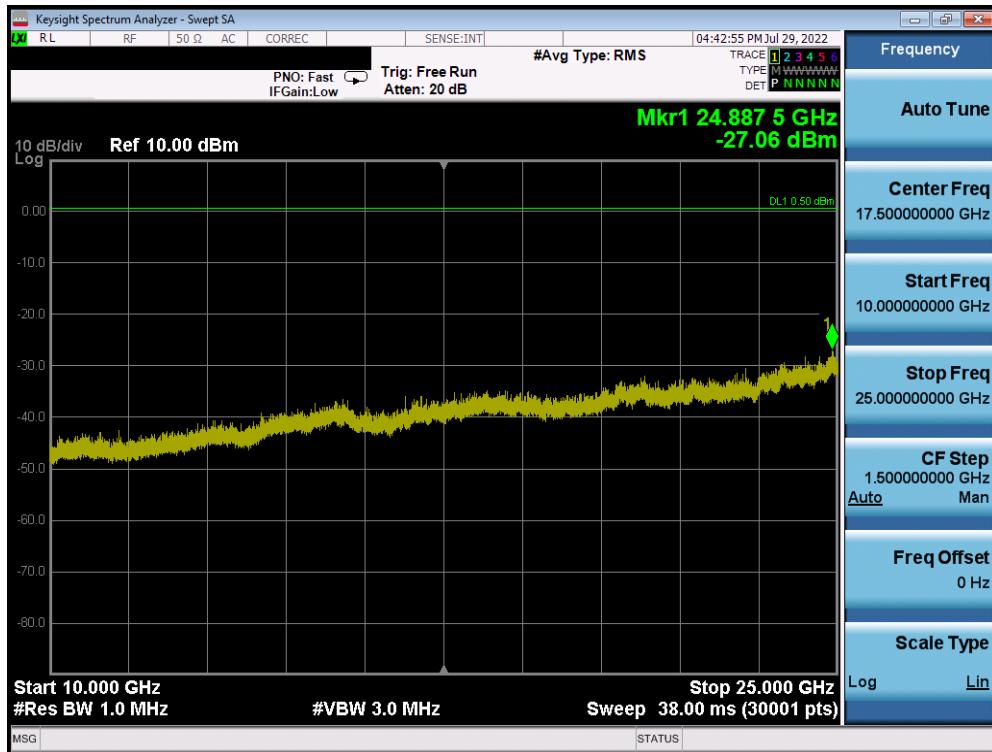


Plot 7-78. Conducted Spurious Plot Antenna 1a (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 38)

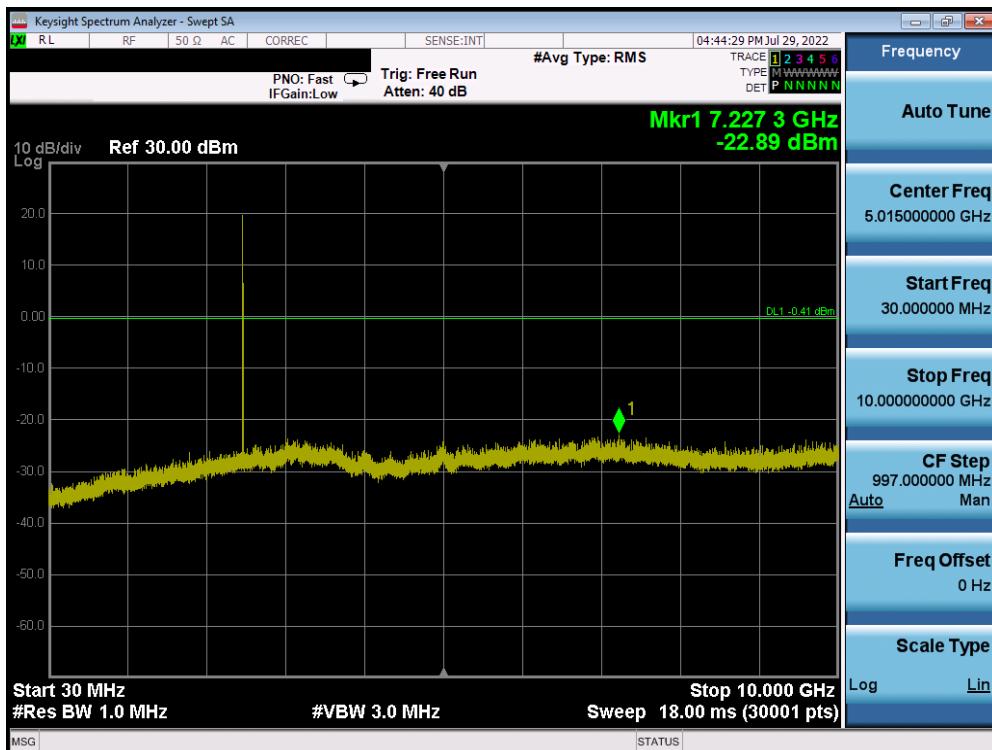

Plot 7-79. Conducted Spurious Plot Antenna 1a (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 73)

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 72 of 107

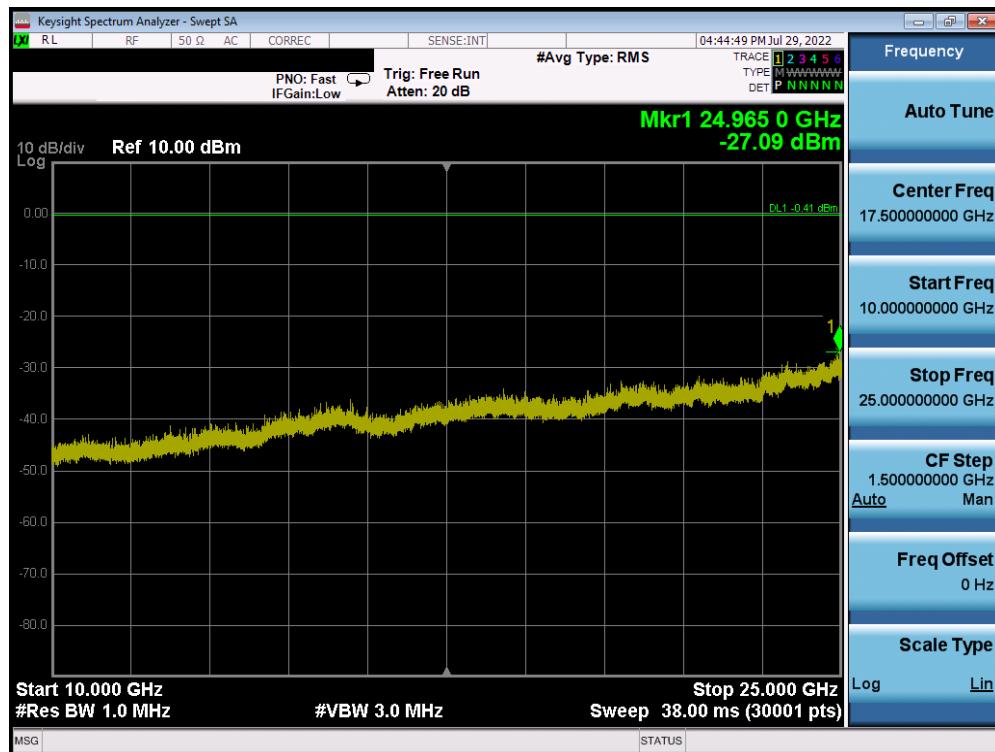

Plot 7-80. Conducted Spurious Plot Antenna 1a (Bluetooth (HDR4), 4 Mbps, ePA – Ch. 73)

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 73 of 107

7.7 Radiated Spurious Emissions – Above 1GHz

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-13 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-13. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Subclause 6.6.4.3

KDB 558074 D01 v05r02 – Section 8.6, 8.7

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times$ span/RBW)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 74 of 107 V 10.5 12/15/2021

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

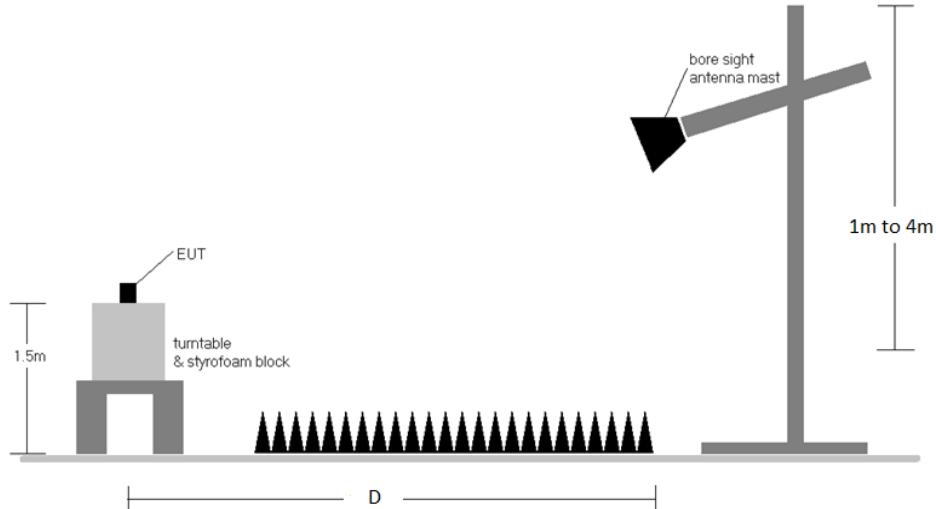


Figure 7-6. Radiated Test Setup >1GHz

Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 558074 D01 v05r02 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-13.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
6. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
8. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 75 of 107

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $[\text{dB}_{\mu\text{V/m}}]$ = Analyzer Level $[\text{dBm}] + 107 + \text{AFCL} [\text{dB/m}]$
- AFCL $[\text{dB/m}]$ = Antenna Factor $[\text{dB/m}]$ + Cable Loss $[\text{dB}]$ – Preamplifier Gain $[\text{dB}]$
- Margin $[\text{dB}]$ = Field Strength Level $[\text{dB}_{\mu\text{V/m}}]$ – Limit $[\text{dB}_{\mu\text{V/m}}]$

Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.7.1 was calculated using the formula:


Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 76 of 107

Radiated Spurious Emission Measurements (1 – 18GHz)

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

Antenna 3a

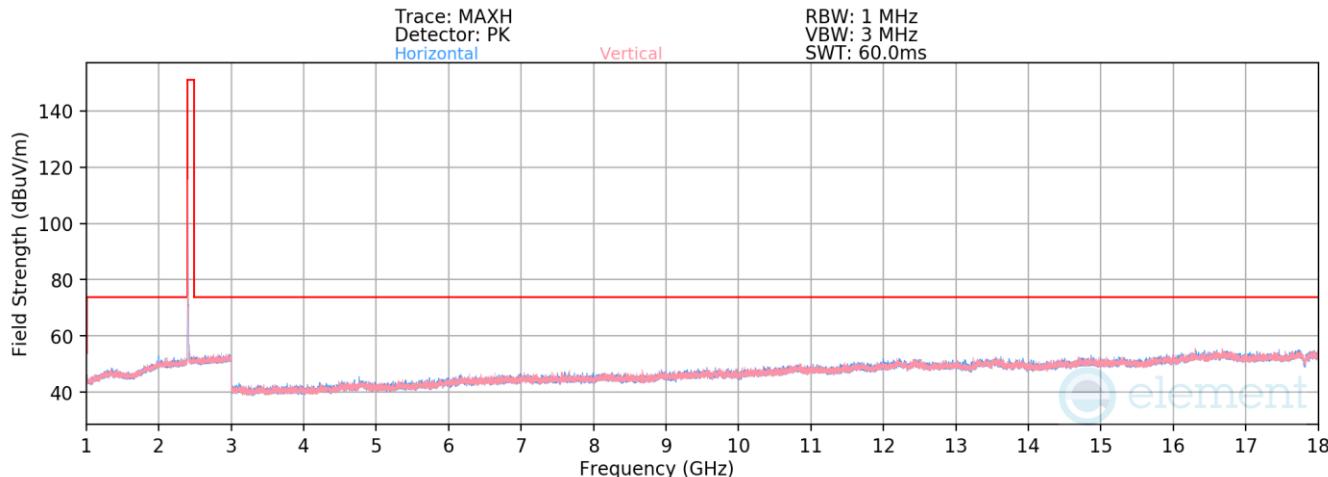


Plot 7-81. Radiated Spurious Emissions 1-18GHz Antenna 3a (4Mbps, HDR4, ePA – Ch. 1)

Bluetooth Mode: HDR4
 Data Rate: 4Mbps
 Power Scheme ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 2404MHz
 Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4808.00	Avg	H	102	203	-76.46	6.66	37.20	53.98	-16.78
4808.00	Peak	H	102	203	-66.33	6.66	47.33	73.98	-26.65
12020.00	Avg	H	-	-	-82.50	14.02	38.52	53.98	-15.46
12020.00	Peak	H	-	-	-70.02	14.02	51.00	73.98	-22.98

Table 7-14. Radiated Spurious Emission Measurements Antenna 3a

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 77 of 107

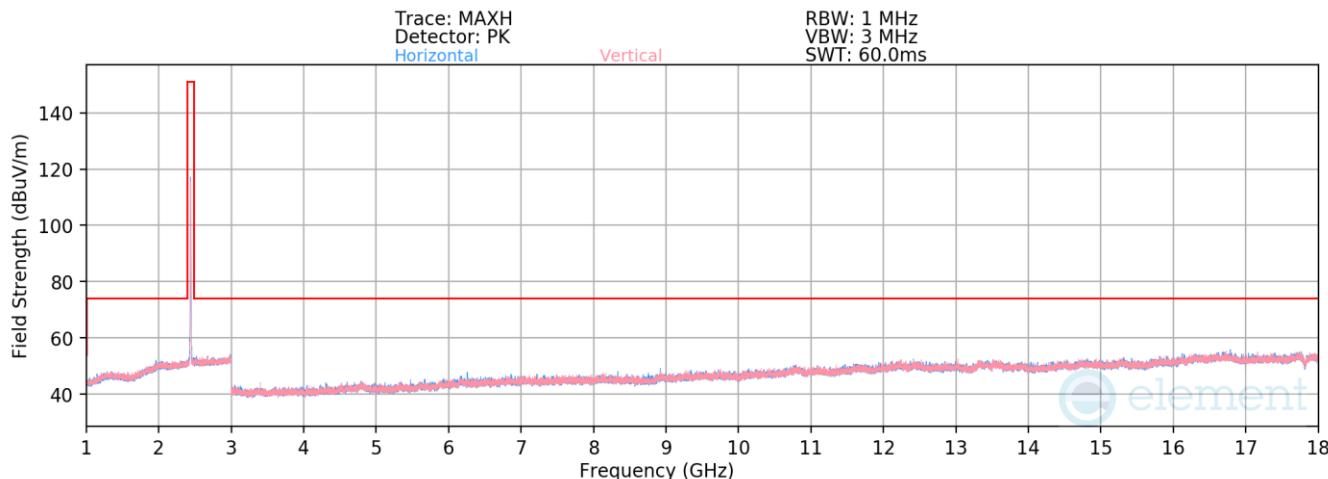


Plot 7-82. Radiated Spurious Emissions 1-18GHz Antenna 3a (4Mbps, HDR4, ePA – Ch. 38)

Bluetooth Mode: HDR4
 Data Rate: 4Mbps
 Power Scheme ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 2441MHz
 Channel: 38

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4882.00	Avg	H	-	-	-80.21	5.47	32.26	53.98	-21.72
4882.00	Peak	H	-	-	-67.01	5.47	45.46	73.98	-28.52
7323.00	Avg	H	-	-	-81.38	8.48	34.10	53.98	-19.88
7323.00	Peak	H	-	-	-69.26	8.48	46.22	73.98	-27.76
12205.00	Avg	H	-	-	-83.11	15.57	39.46	53.98	-14.52
12205.00	Peak	H	-	-	-70.04	15.57	52.53	73.98	-21.45

Table 7-15. Radiated Spurious Emission Measurements Antenna 3a

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 78 of 107

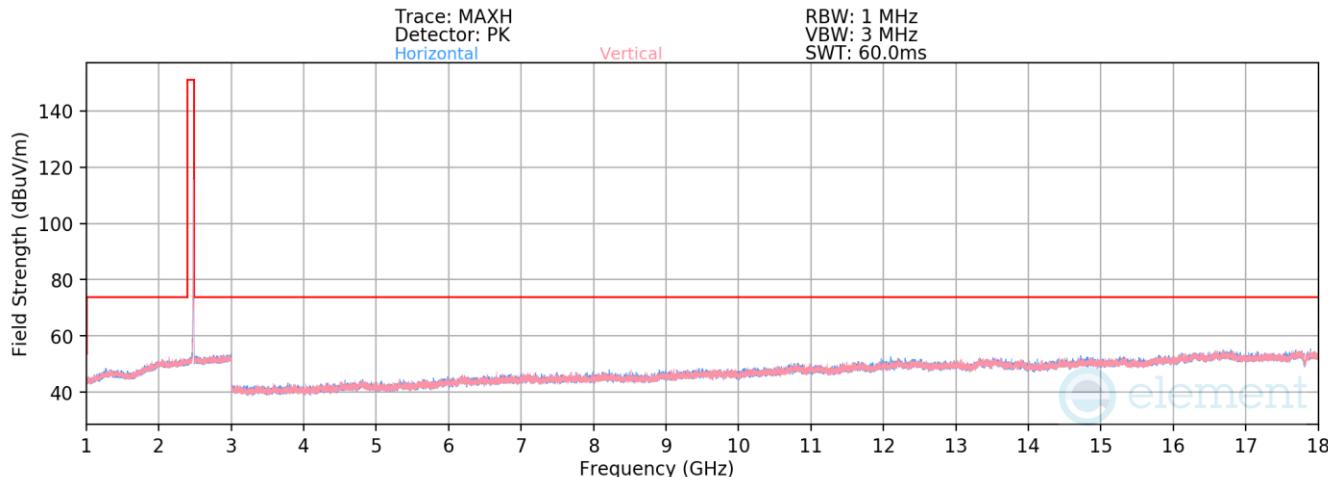

Plot 7-83. Radiated Spurious Emissions 1-18GHz Antenna 3a (4Mbps, HDR4, ePA – Ch. 73)

Bluetooth Mode: HDR4
 Data Rate: 4Mbps
 Power Scheme ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 2476MHz
 Channel: 73

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4952.00	Avg	H	-	-	-79.97	4.64	31.67	53.98	-22.31
4952.00	Peak	H	-	-	-67.80	4.64	43.84	73.98	-30.14
7428.00	Avg	H	-	-	-81.08	8.27	34.19	53.98	-19.79
7428.00	Peak	H	-	-	-68.22	8.27	47.05	73.98	-26.93
12380.00	Avg	H	-	-	-82.80	14.31	38.51	53.98	-15.47
12380.00	Peak	H	-	-	-69.89	14.31	51.42	73.98	-22.56


Table 7-16. Radiated Spurious Emission Measurements Antenna 3a

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 79 of 107

Radiated Spurious Emission Measurements (1 – 18GHz)

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

Antenna 1a

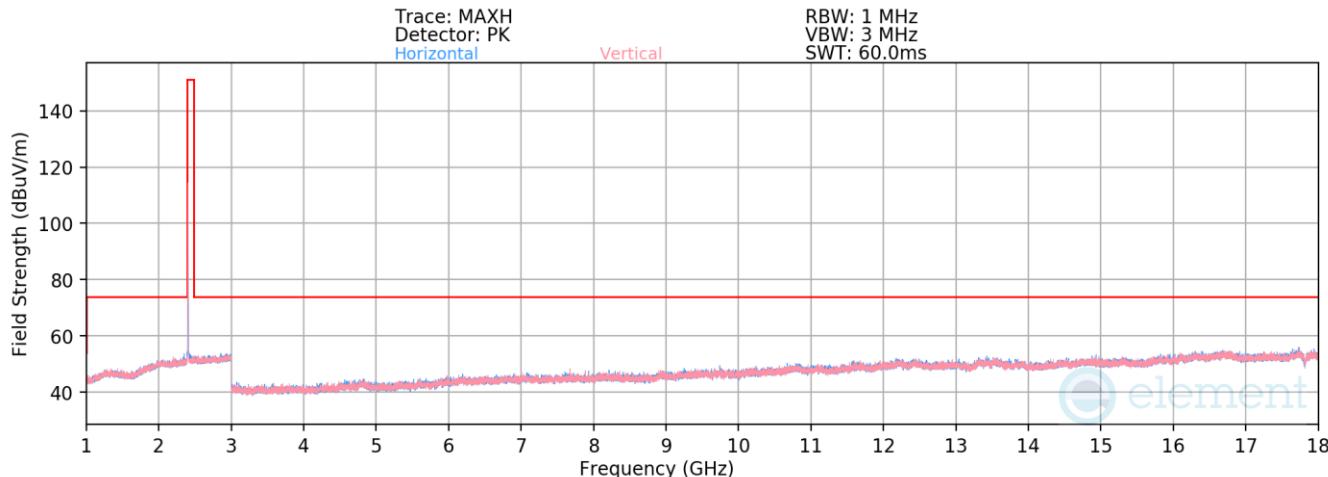


Plot 7-84. Radiated Spurious Emissions 1-18GHz Antenna 1a (4Mbps, HDR4, ePA – Ch. 1)

Bluetooth Mode:	<u>HDR4</u>
Data Rate:	<u>4Mbps</u>
Power Scheme	<u>ePA</u>
Distance of Measurements:	<u>3 Meters</u>
Operating Frequency:	<u>2404MHz</u>
Channel:	<u>1</u>

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4808.00	Avg	H	-	-	-81.00	6.66	32.66	53.98	-21.32
4808.00	Peak	H	-	-	-70.10	6.66	43.56	73.98	-30.42
12020.00	Avg	H	-	-	-83.31	14.02	37.71	53.98	-16.27
12020.00	Peak	H	-	-	-73.47	14.02	47.55	73.98	-26.43

Table 7-17. Radiated Spurious Emission Measurements Antenna 1a

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 80 of 107

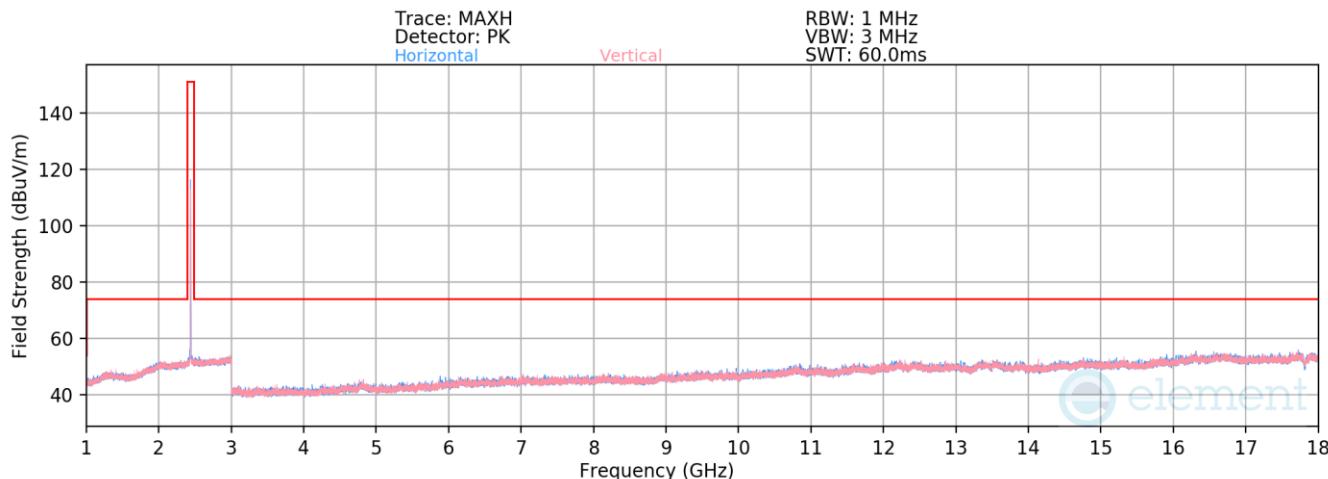


Plot 7-85. Radiated Spurious Emissions 1-18GHz Antenna 1a (4Mbps, HDR4, ePA – Ch. 38)

Bluetooth Mode: HDR4
 Data Rate: 4Mbps
 Power Scheme ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 2441MHz
 Channel: 38

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4882.00	Avg	H	-	-	-80.19	5.47	32.28	53.98	-21.70
4882.00	Peak	H	-	-	-68.68	5.47	43.79	73.98	-30.19
7323.00	Avg	H	-	-	-81.52	8.48	33.96	53.98	-20.02
7323.00	Peak	H	-	-	-69.26	8.48	46.22	73.98	-27.76
12205.00	Avg	H	-	-	-83.00	15.57	39.57	53.98	-14.41
12205.00	Peak	H	-	-	-70.49	15.57	52.08	73.98	-21.90

Table 7-18. Radiated Spurious Emission Measurements Antenna 1a

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 81 of 107

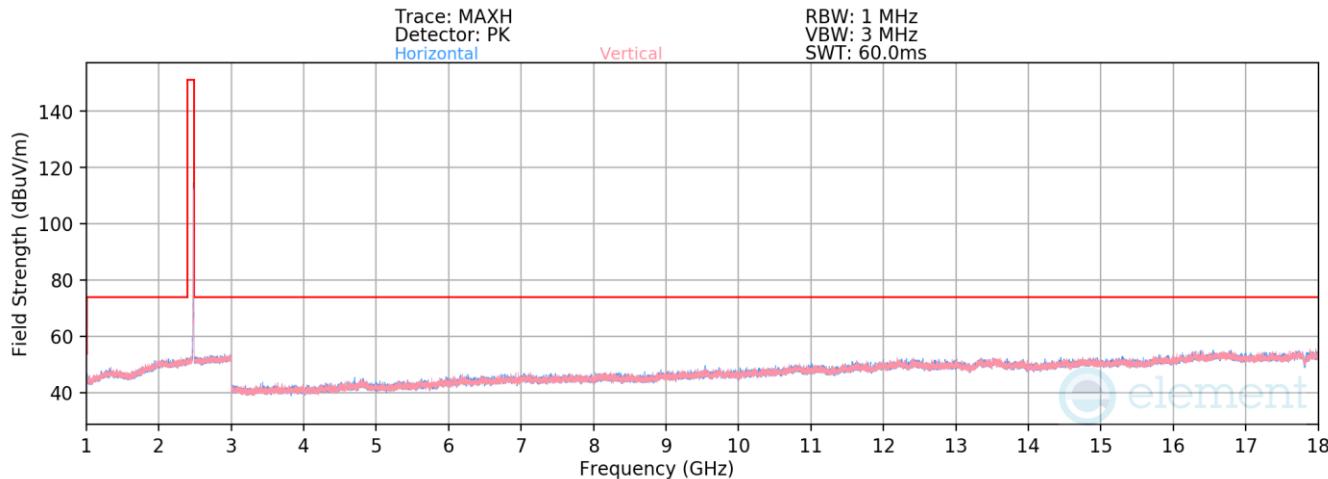

Plot 7-86. Radiated Spurious Emissions 1-18GHz Antenna 1a (4Mbps, HDR4, ePA – Ch. 73)

Bluetooth Mode: HDR4
 Data Rate: 4Mbps
 Power Scheme ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 2476MHz
 Channel: 73

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4952.00	Avg	H	-	-	-80.17	4.64	31.47	53.98	-22.51
4952.00	Peak	H	-	-	-68.13	4.64	43.51	73.98	-30.47
7428.00	Avg	H	-	-	-81.18	8.27	34.09	53.98	-19.89
7428.00	Peak	H	-	-	-69.29	8.27	45.98	73.98	-28.00
12380.00	Avg	H	-	-	-83.08	14.31	38.23	53.98	-15.75
12380.00	Peak	H	-	-	-70.39	14.31	50.92	73.98	-23.06


Table 7-19. Radiated Spurious Emission Measurements Antenna 1a

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 82 of 107

Radiated Spurious Emission Measurements (1-18GHz)

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

TxBF

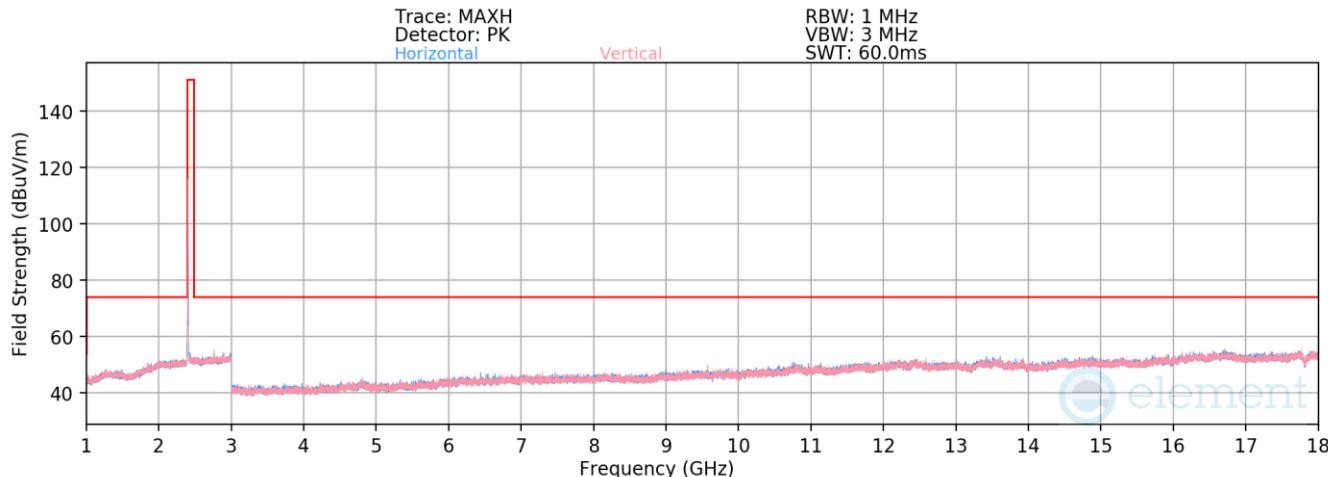


Plot 7-87. Radiated Spurious Emissions 1-18GHz TxBF (4Mbps, HDR4, ePA – Ch. 1)

Bluetooth Mode: HDR4
 Data Rate: 4Mbps
 Power Scheme ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 2404MHz
 Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4808.00	Avg	V	204	106	-76.98	6.66	36.68	53.98	-17.30
4808.00	Peak	V	204	106	-67.37	6.66	46.29	73.98	-27.69
12020.00	Avg	V	-	-	-82.53	14.02	38.49	53.98	-15.49
12020.00	Peak	V	-	-	-70.50	14.02	50.52	73.98	-23.46

Table 7-20. Radiated Spurious Emission Measurements TxBF

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 83 of 107

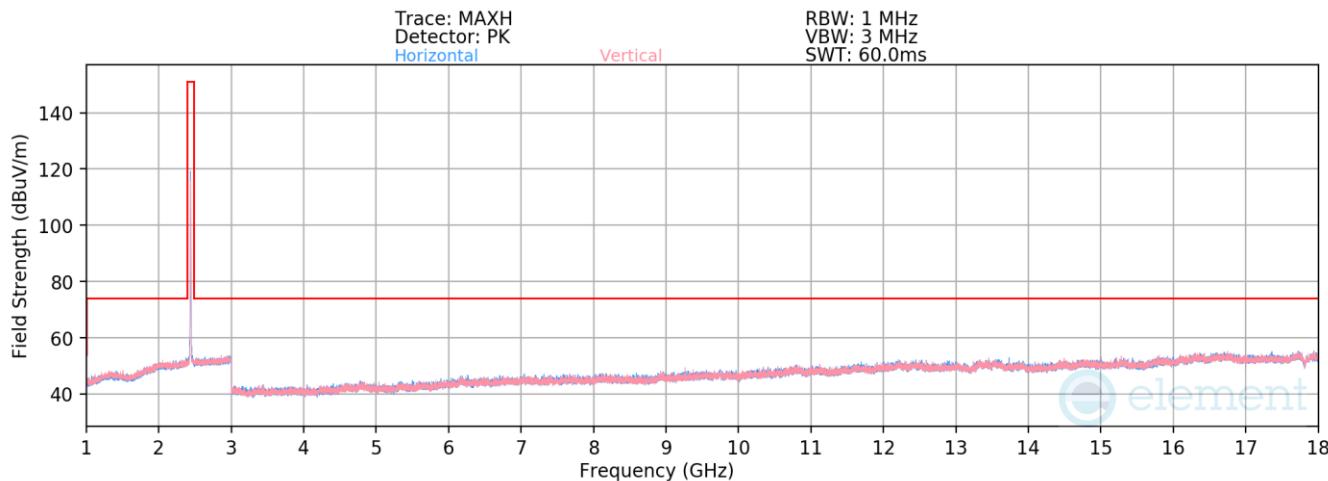


Plot 7-88. Radiated Spurious Emissions 1-18GHz TxBF (4Mbps, HDR4, ePA – Ch. 38)

Bluetooth Mode: HDR4
 Data Rate: 4Mbps
 Power Scheme ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 2441MHz
 Channel: 38

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4882.00	Avg	V	-	-	-80.00	5.47	32.47	53.98	-21.51
4882.00	Peak	V	-	-	-67.10	5.47	45.37	73.98	-28.61
7323.00	Avg	V	-	-	-81.19	8.48	34.29	53.98	-19.69
7323.00	Peak	V	-	-	-68.69	8.48	46.79	73.98	-27.19
12205.00	Avg	V	-	-	-82.62	15.57	39.95	53.98	-14.03
12205.00	Peak	V	-	-	-69.91	15.57	52.66	73.98	-21.32

Table 7-21. Radiated Spurious Emission Measurements TxBF

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 84 of 107

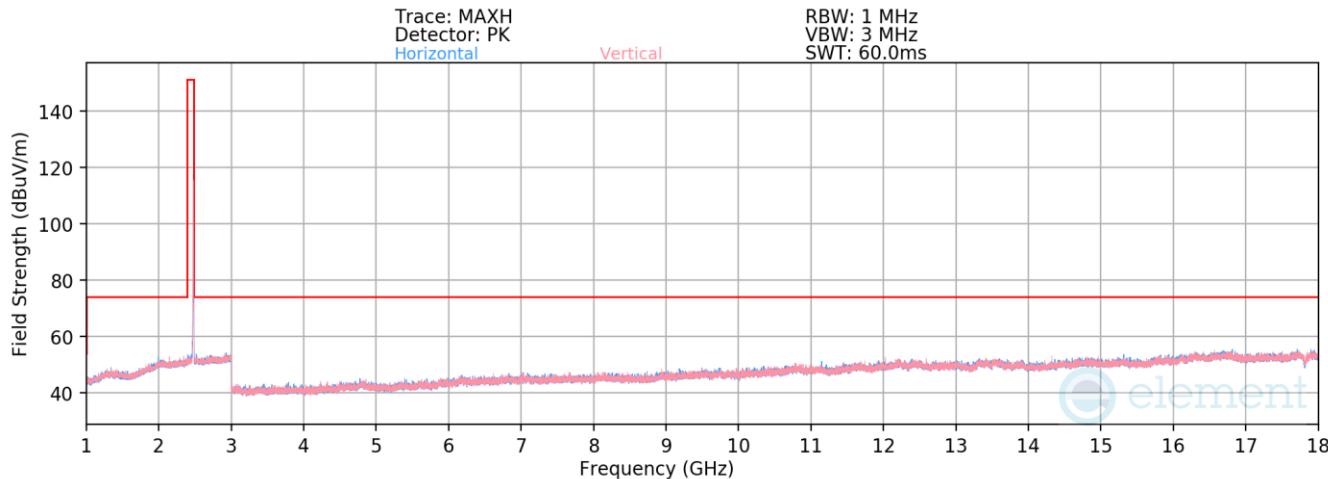

Plot 7-89. Radiated Spurious Emissions 1-18GHz TxBF (4Mbps, HDR4, ePA – Ch. 73)

Bluetooth Mode: HDR4
 Data Rate: 4Mbps
 Power Scheme ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 2476MHz
 Channel: 73


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4952.00	Avg	V	-	-	-79.90	4.64	31.74	53.98	-22.24
4952.00	Peak	V	-	-	-67.34	4.64	44.30	73.98	-29.68
7428.00	Avg	V	-	-	-81.04	8.27	34.23	53.98	-19.75
7428.00	Peak	V	-	-	-68.07	8.27	47.20	73.98	-26.78
12380.00	Avg	V	-	-	-82.73	14.31	38.58	53.98	-15.40
12380.00	Peak	V	-	-	-70.68	14.31	50.63	73.98	-23.35

Table 7-22. Radiated Spurious Emission Measurements TxBF


FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 85 of 107

Radiated Spurious Emissions Measurements (Above 18GHz)

§15.205 §15.209; RSS-Gen [8.9]

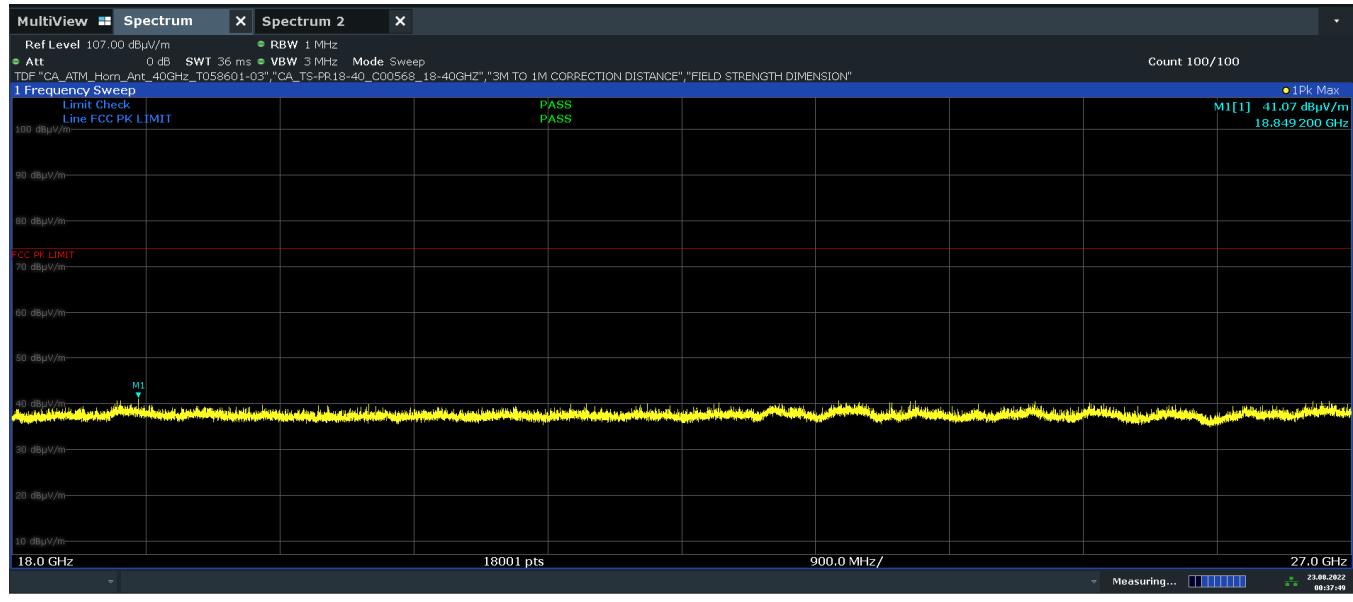

Plot 7-90. Radiated Spurious Plot Above 18GHz (4Mbps, HDR4, ePA – Ch. 38, Ant. Pol. H)

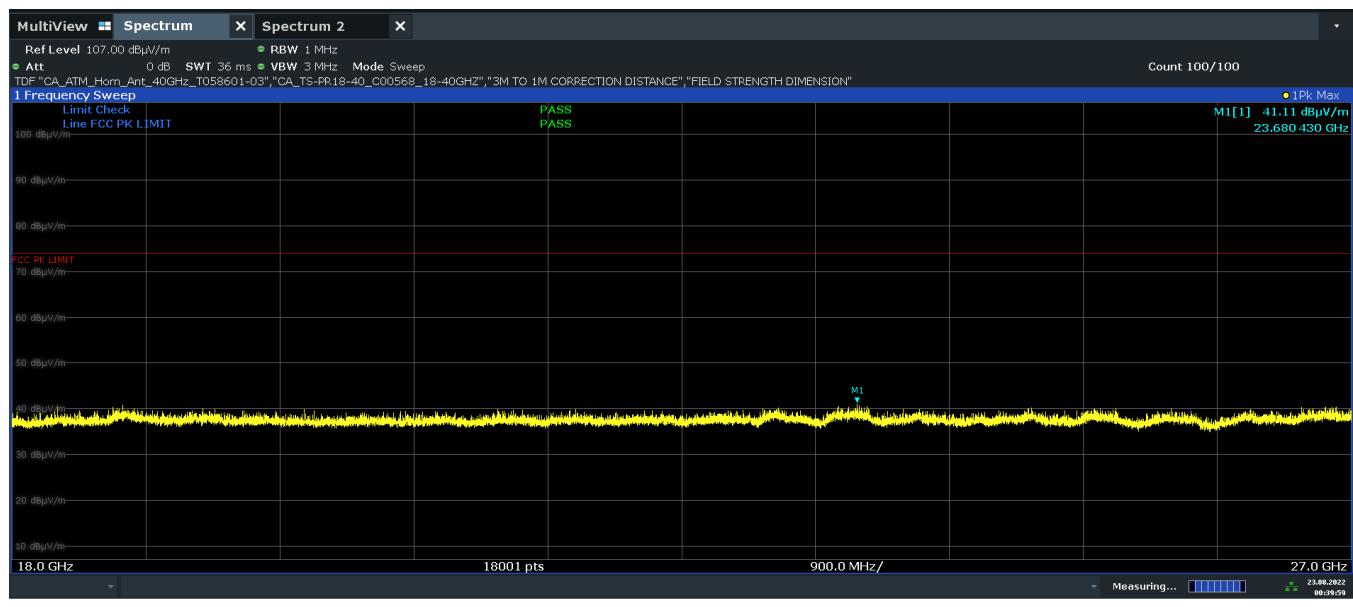

Plot 7-91. Radiated Spurious Plot Above 18GHz (4Mbps, HDR4, ePA – Ch. 38, Ant. Pol. V)

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 86 of 107

7.7.1 Radiated Restricted Band Edge Measurements


§15.205 §15.209; RSS-Gen [8.9]

Antenna 3a

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

Bluetooth Mode:	<u>HDR4</u>
Data Rate:	<u>4Mbps</u>
Power Scheme:	<u>ePA</u>
Measurement Distance:	<u>3 Meters</u>
Operating Frequency:	<u>2404MHz</u>
Channel:	<u>1</u>

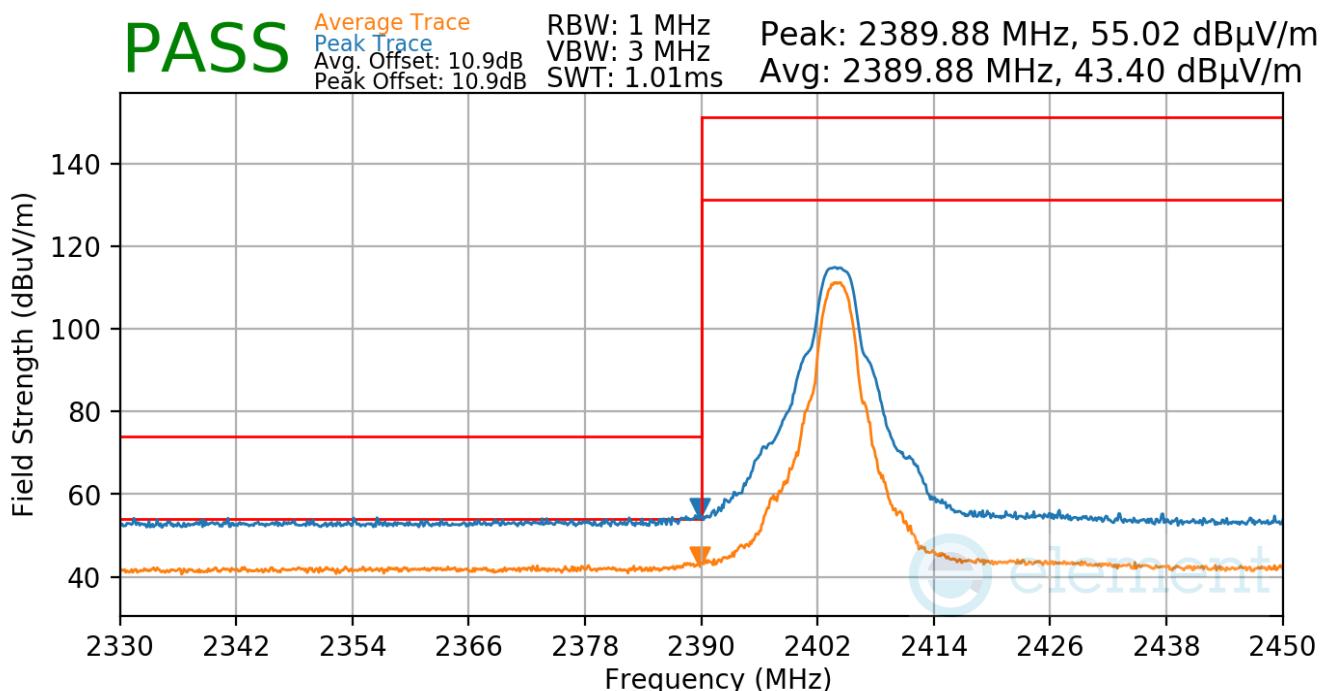

Plot 7-92. Radiated Restricted Lower Band Edge Measurement Antenna 3a

FCC ID: BCGA2757 IC: 579C-A2757		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 87 of 107


Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

Bluetooth Mode:	HDR8
Data Rate:	8Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2404MHz
Channel:	1

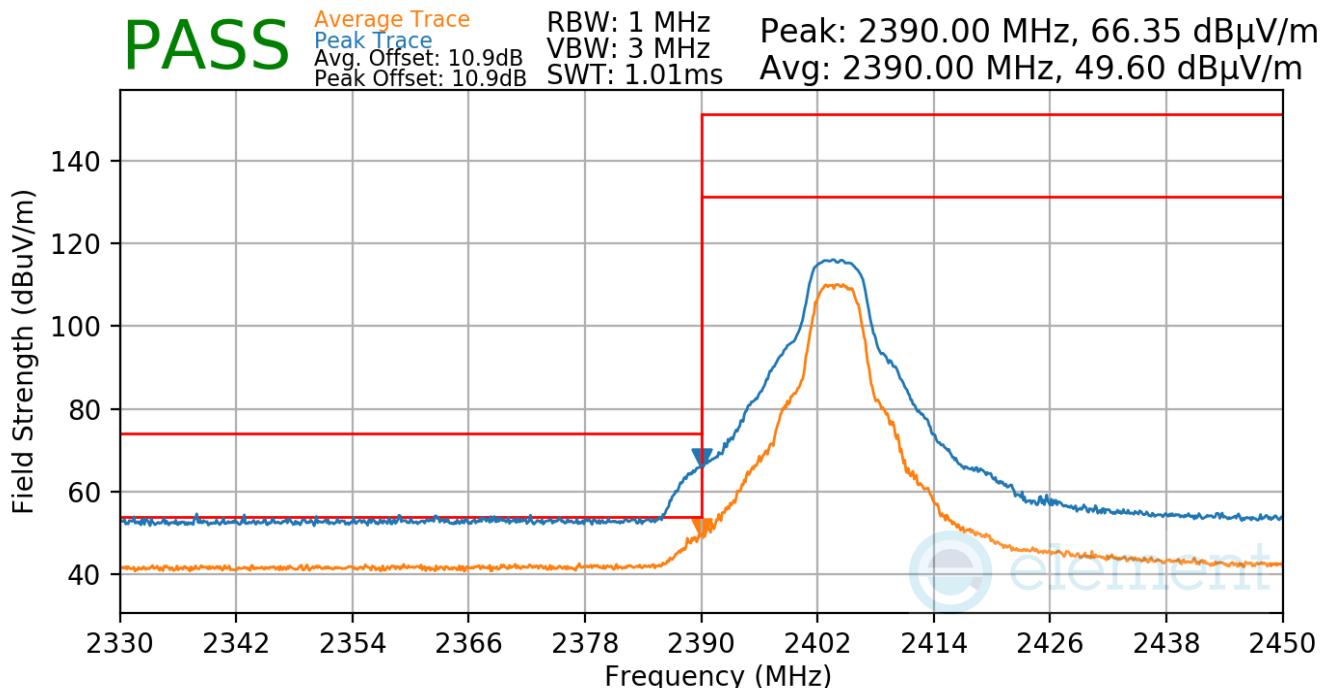

Plot 7-93. Radiated Restricted Lower Band Edge Measurement Antenna 3a

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 88 of 107


Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

Bluetooth Mode:	HDR4
Data Rate:	4Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2476MHz
Channel:	73

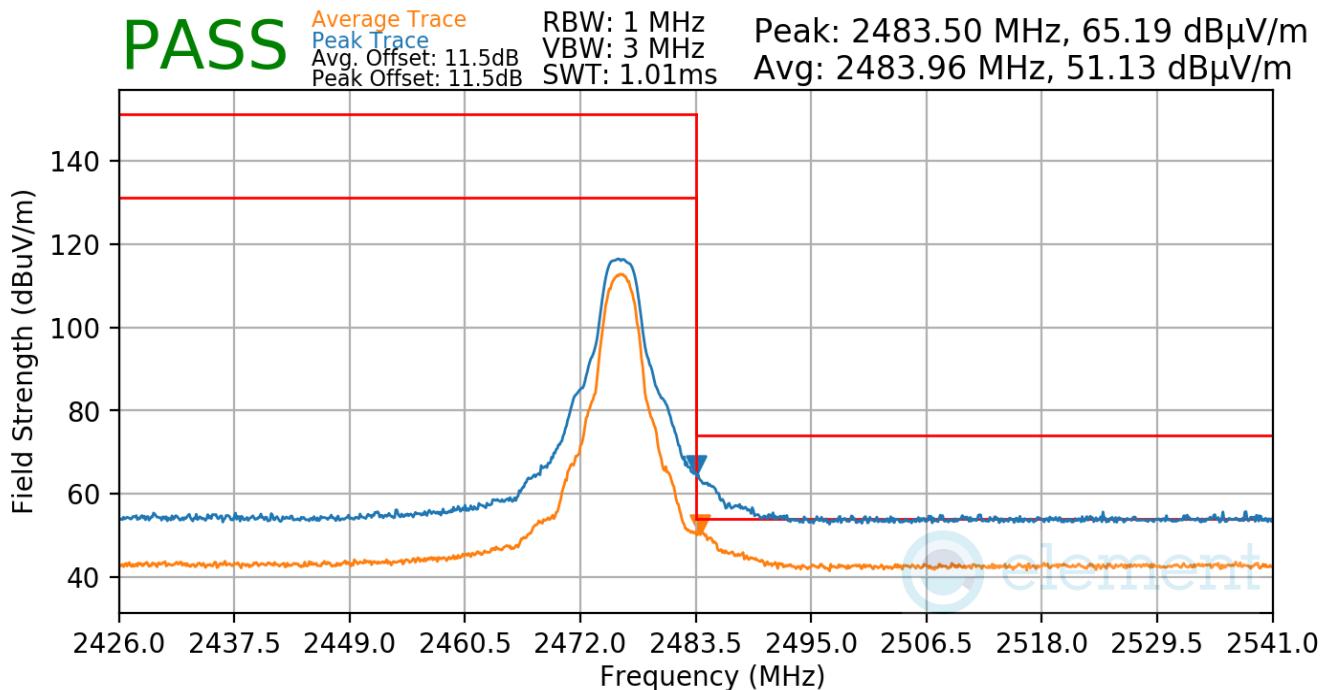

Plot 7-94. Radiated Restricted Upper Band Edge Measurement Antenna 3a

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 89 of 107


Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

Bluetooth Mode:	HDR8
Data Rate:	8Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2476MHz
Channel:	73

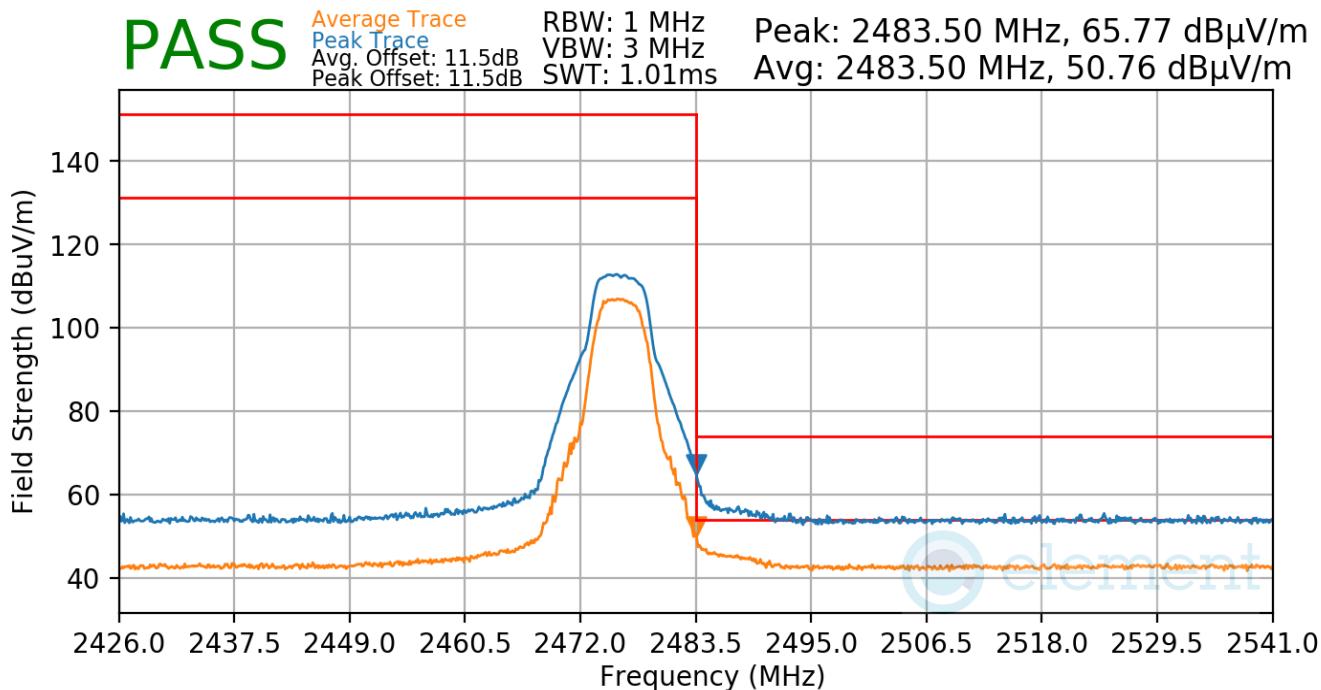

Plot 7-95. Radiated Restricted Upper Band Edge Measurement Antenna 3a

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 90 of 107

Radiated Restricted Band Edge Measurements


§15.205 §15.209; RSS-Gen [8.9]

Antenna 1a

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

Bluetooth Mode:	<u>HDR4</u>
Data Rate:	<u>4Mbps</u>
Power Scheme:	<u>ePA</u>
Measurement Distance:	<u>3 Meters</u>
Operating Frequency:	<u>2404MHz</u>
Channel:	<u>1</u>

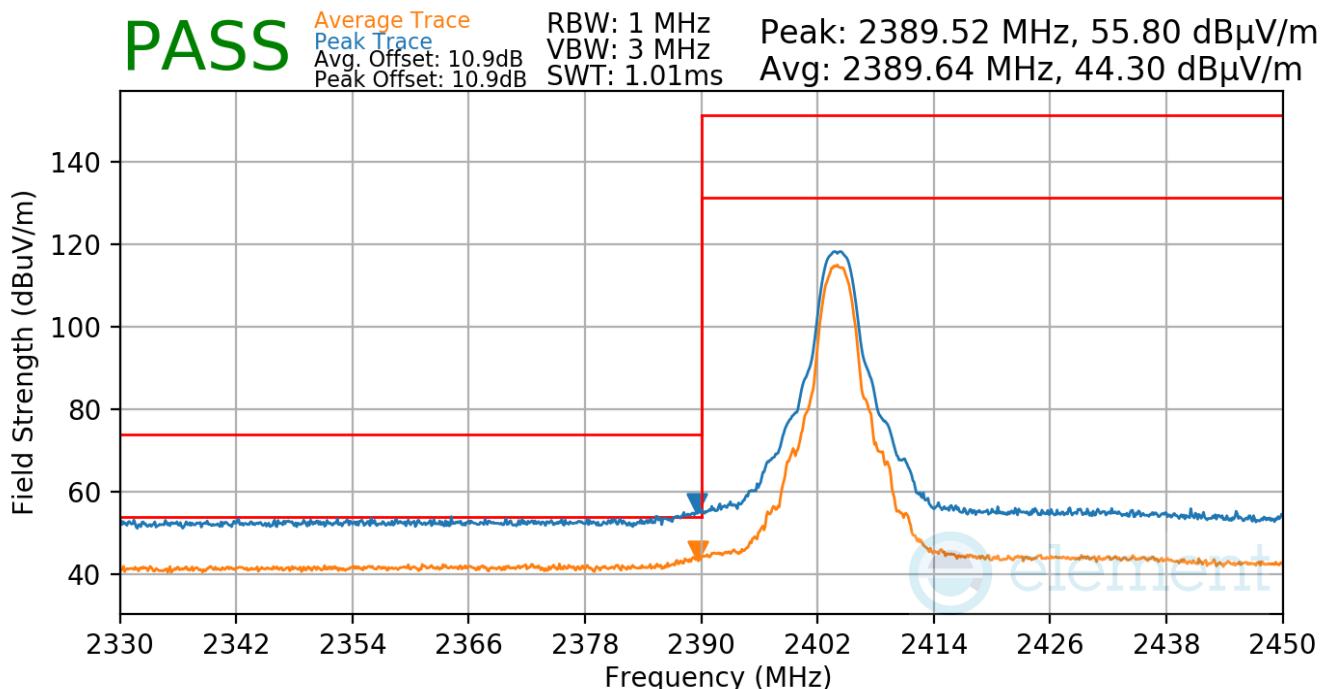

Plot 7-96. Radiated Restricted Lower Band Edge Measurement Antenna 1a

FCC ID: BCGA2757 IC: 579C-A2757		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 91 of 107


Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

Bluetooth Mode:	HDR8
Data Rate:	8Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2404MHz
Channel:	1

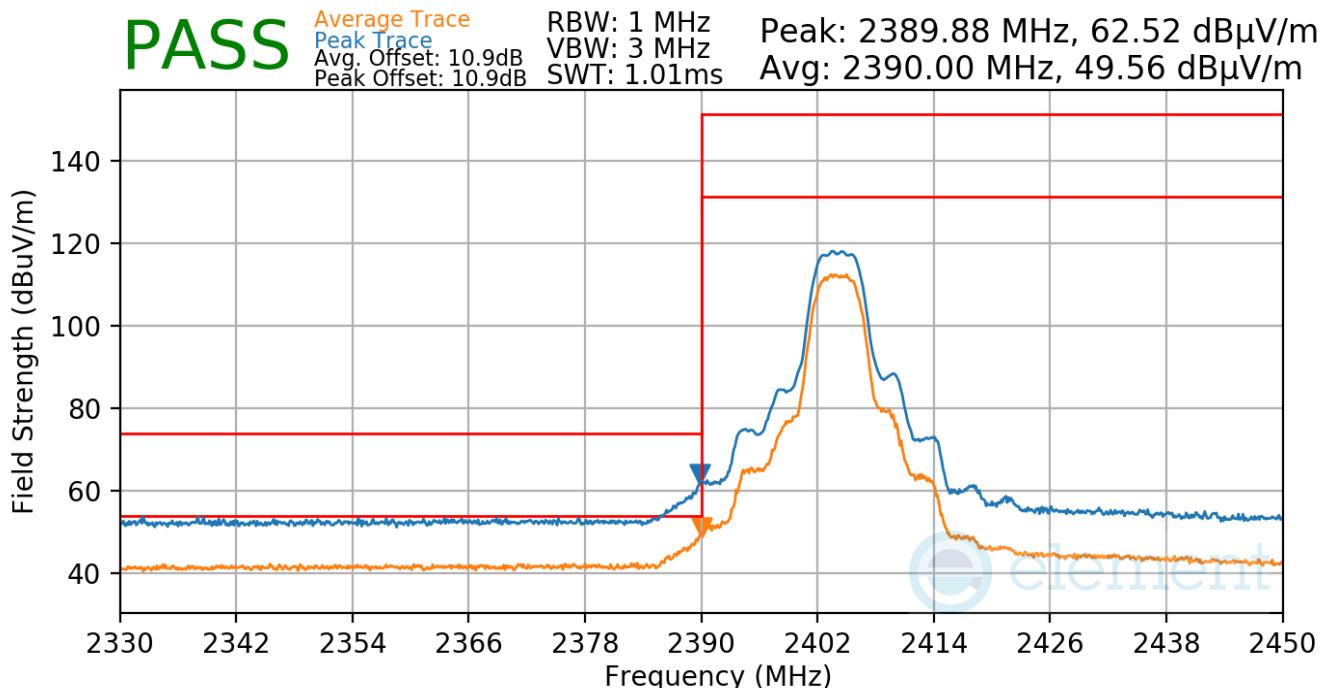

Plot 7-97. Radiated Restricted Lower Band Edge Measurement Antenna 1a

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 92 of 107


Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

Bluetooth Mode:	HDR4
Data Rate:	4Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2476MHz
Channel:	73

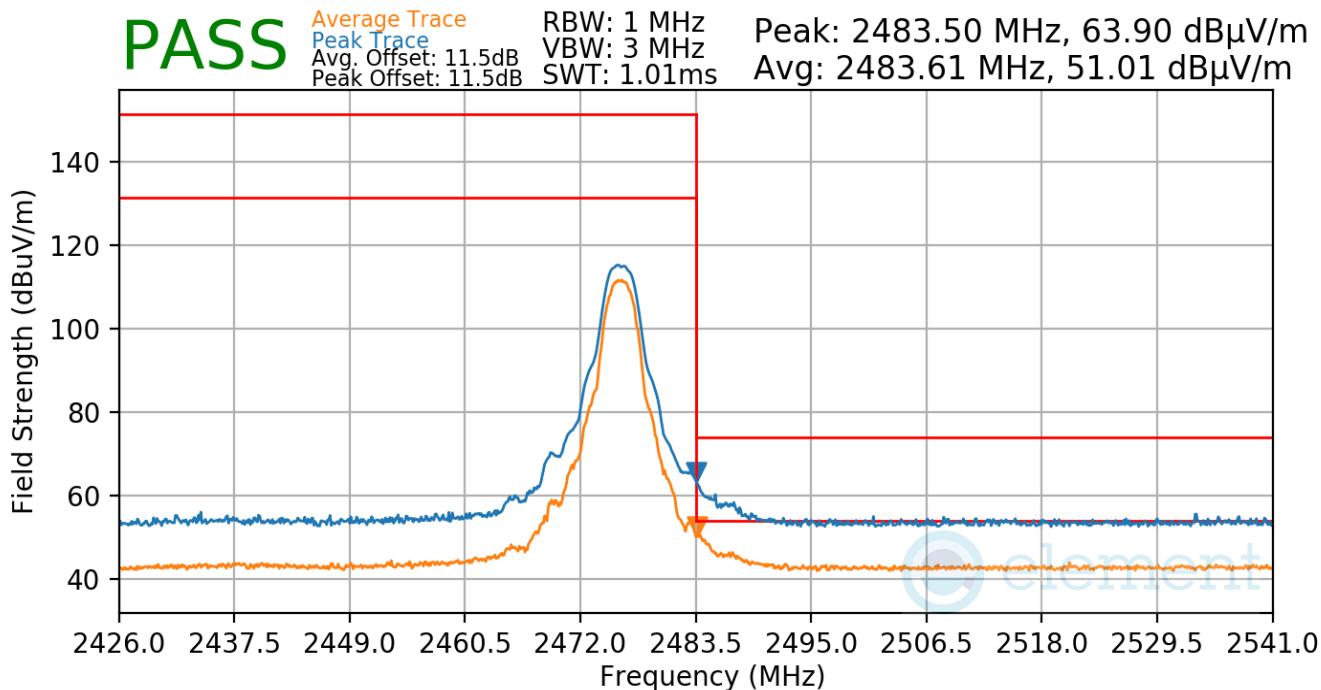

Plot 7-98. Radiated Restricted Upper Band Edge Measurement Antenna 1a

FCC ID: BCGA2757 IC: 579C-A2757		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 93 of 107


Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

Bluetooth Mode:	HDR8
Data Rate:	8Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2476MHz
Channel:	73

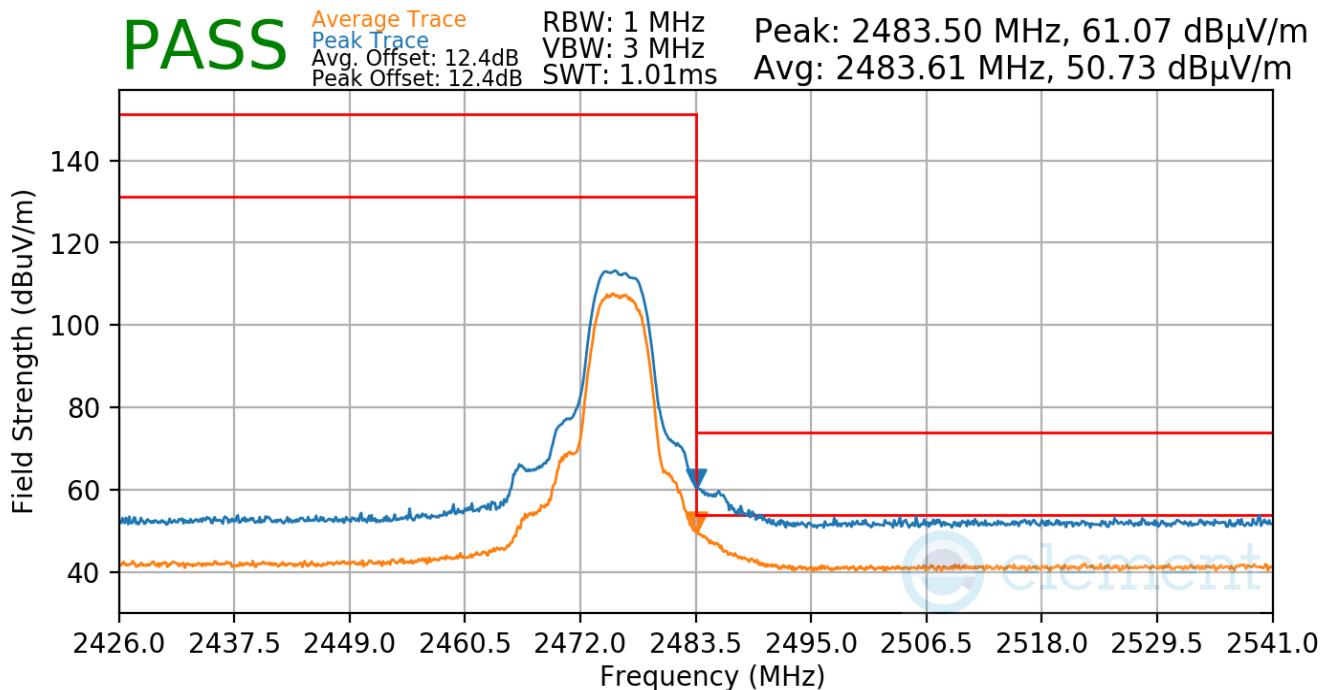

Plot 7-99. Radiated Restricted Upper Band Edge Measurement Antenna 1a

FCC ID: BCGA2757 IC: 579C-A2757		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 94 of 107

Radiated Restricted Band Edge Measurements


§15.205 §15.209; RSS-Gen [8.9]

TxBF

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

Bluetooth Mode:	<u>HDR4</u>
Data Rate:	<u>4Mbps</u>
Power Scheme:	<u>ePA</u>
Measurement Distance:	<u>3 Meters</u>
Operating Frequency:	<u>2404MHz</u>
Channel:	<u>1</u>

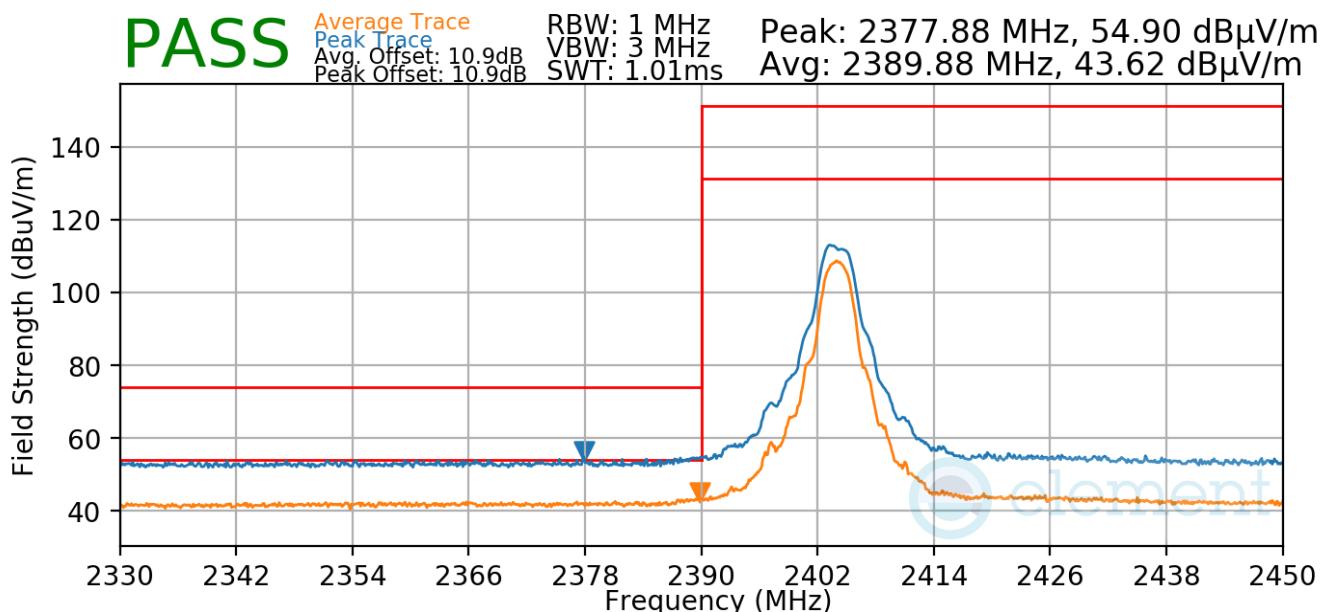

Plot 7-100. Radiated Restricted Lower Band Edge Measurement TxBF

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 95 of 107




Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

Bluetooth Mode: HDR8
Data Rate: 8Mbps
Power Scheme: ePA
Measurement Distance: 3 Meters
Operating Frequency: 2404MHz
Channel: 1

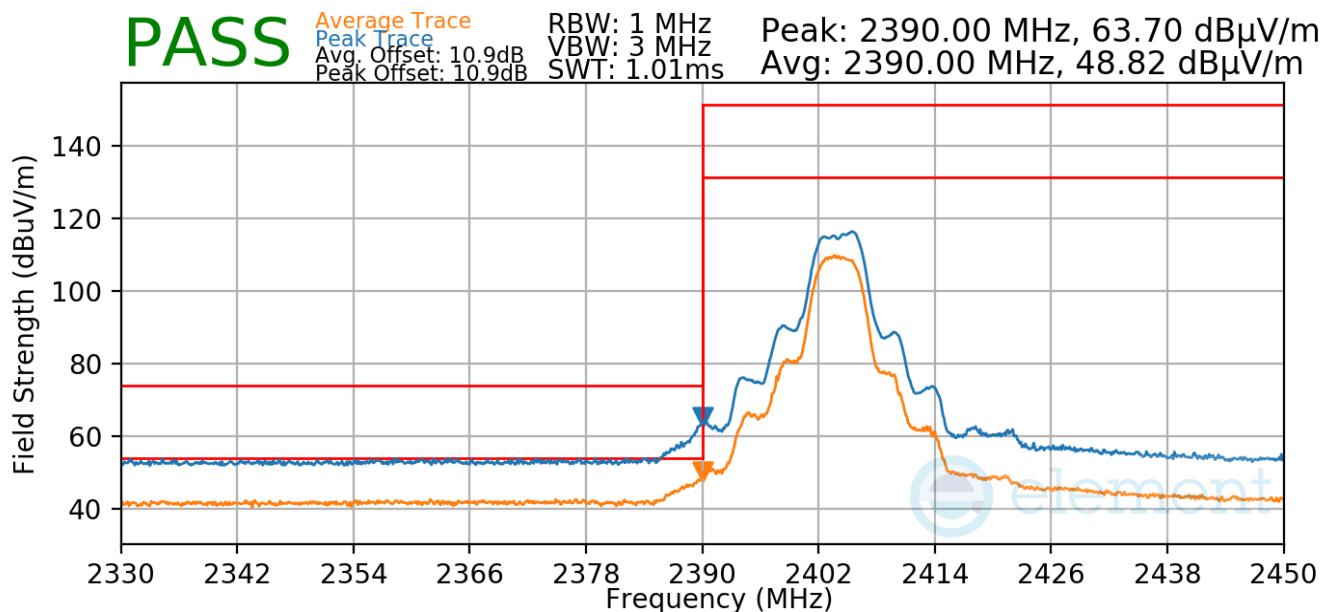

Plot 7-101. Radiated Restricted Lower Band Edge Measurement TxBF

FCC ID: BCGA2757 IC: 579C-A2757		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 96 of 107


Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

Bluetooth Mode:	HDR4
Data Rate:	4Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2476MHz
Channel:	73

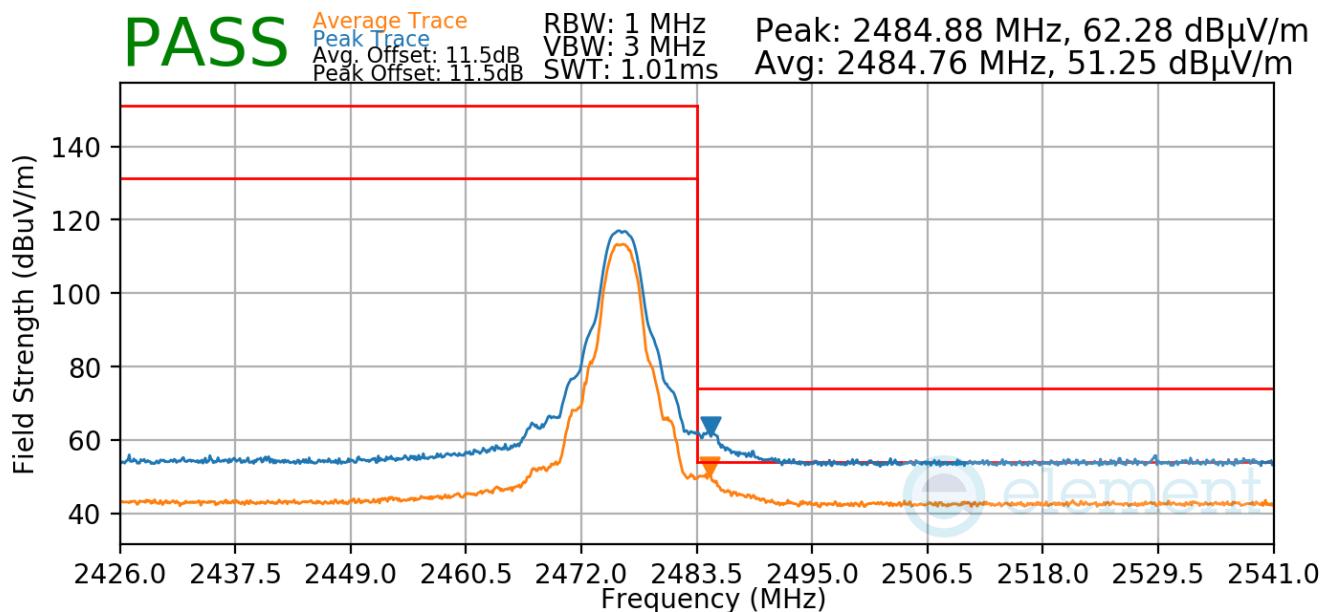

Plot 7-102. Radiated Restricted Upper Band Edge Measurement TxBF

FCC ID: BCGA2757 IC: 579C-A2757		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 97 of 107


Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

Bluetooth Mode:	HDR8
Data Rate:	8Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2476MHz
Channel:	73

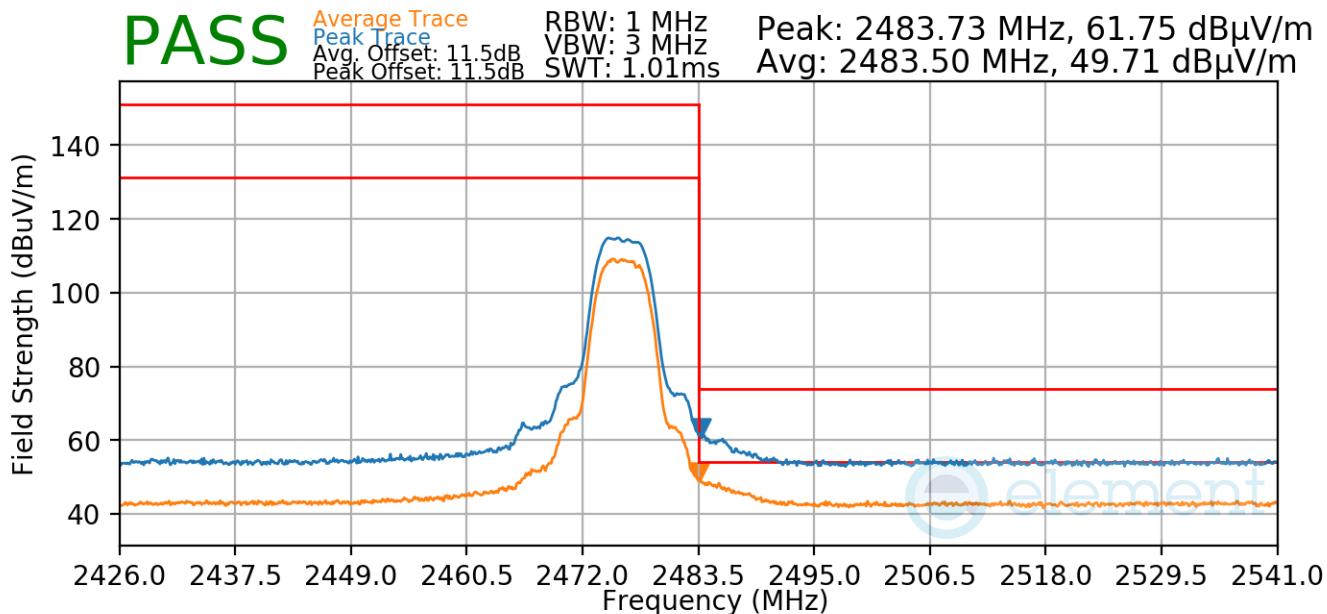

Plot 7-103. Radiated Restricted Upper Band Edge Measurement TxBF

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 98 of 107

7.8 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-23 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-23. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 99 of 107

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

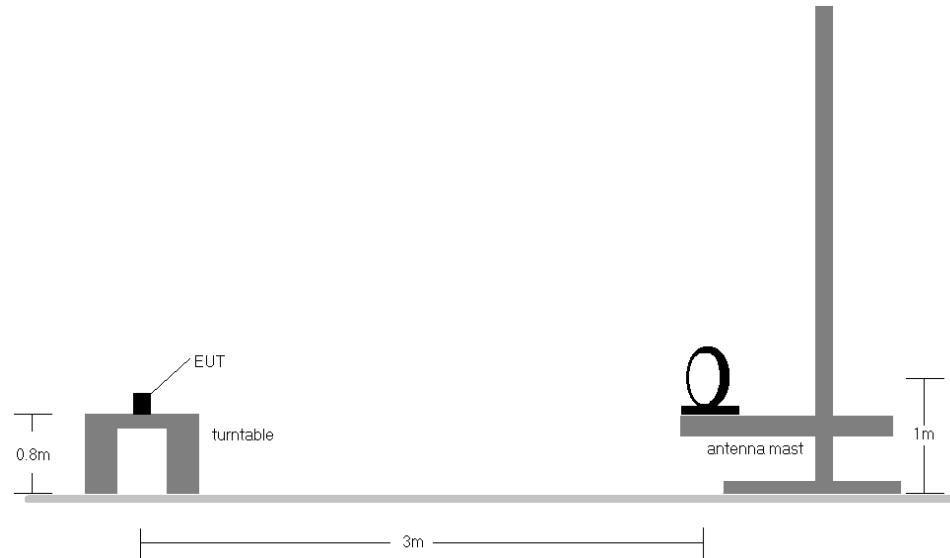


Figure 7-7. Radiated Test Setup < 30MHz

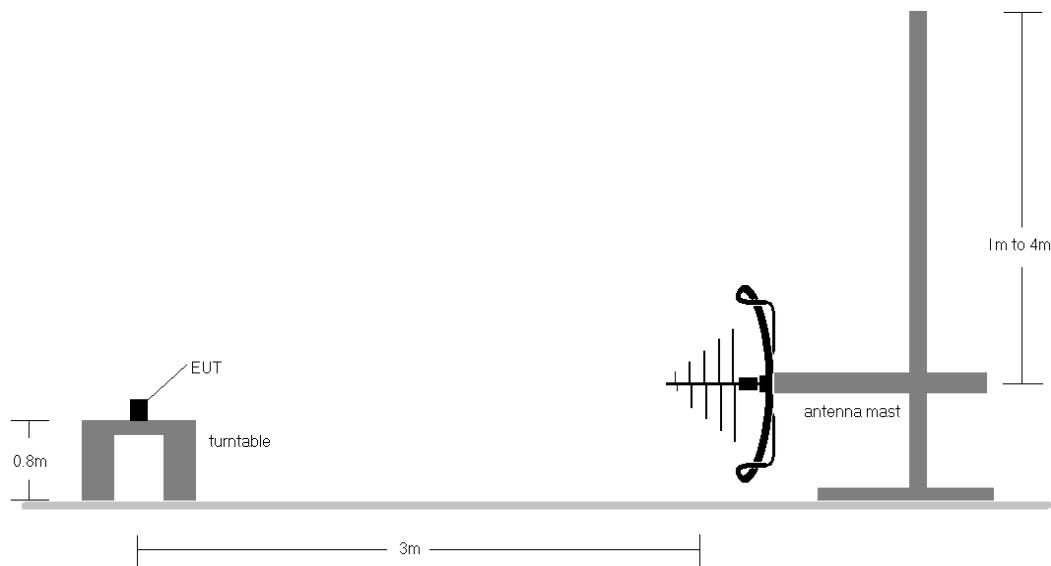


Figure 7-8. Radiated Test Setup < 1GHz

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 100 of 107

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen(8.10) are below the limit shown in Table 7-23.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.
10. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level $[\text{dB}_{\mu\text{V/m}}]$ = Analyzer Level $[\text{dBm}] + 107 + \text{AFCL} [\text{dB/m}]$
- AFCL $[\text{dB/m}]$ = Antenna Factor $[\text{dB/m}] + \text{Cable Loss} [\text{dB}] - \text{Preamplifier Gain} [\text{dB}]$
- Margin $[\text{dB}]$ = Field Strength Level $[\text{dB}_{\mu\text{V/m}}] - \text{Limit} [\text{dB}_{\mu\text{V/m}}]$

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 101 of 107

Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

TxBF

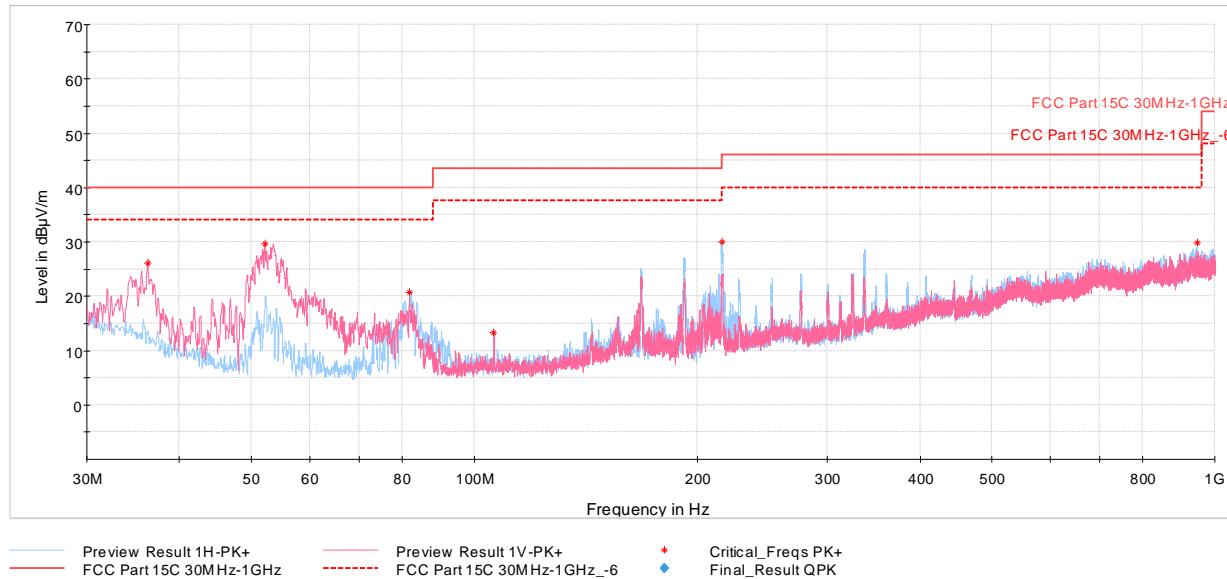

Plot 7-104. Radiated Spurious Emissions Below 1GHz TxBF (4Mbps, ePA – Ch.38 with AC/DC Adapter)

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
36.257	Max-Peak	V	100	0	-68.49	-12.46	26.05	40.00	-13.95
52.165	Max-Peak	V	100	346	-59.00	-18.29	29.71	40.00	-10.29
81.895	Max-Peak	H	200	160	-68.79	-17.49	20.72	40.00	-19.28
106.388	Max-Peak	V	100	0	-77.19	-16.44	13.37	43.52	-30.15
216.240	Max-Peak	H	100	123	-64.42	-12.52	30.06	46.02	-15.96
948.542	Max-Peak	H	200	322	-81.64	4.55	29.91	46.02	-16.11

Table 7-24. Radiated Spurious Emissions Below 1GHz TxBF (4Mbps, ePA – Ch.38 with AC/DC Adapter)

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 102 of 107

7.9 AC Line-Conducted Emissions Measurement

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-25. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013 – Subclause 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 103 of 107 V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


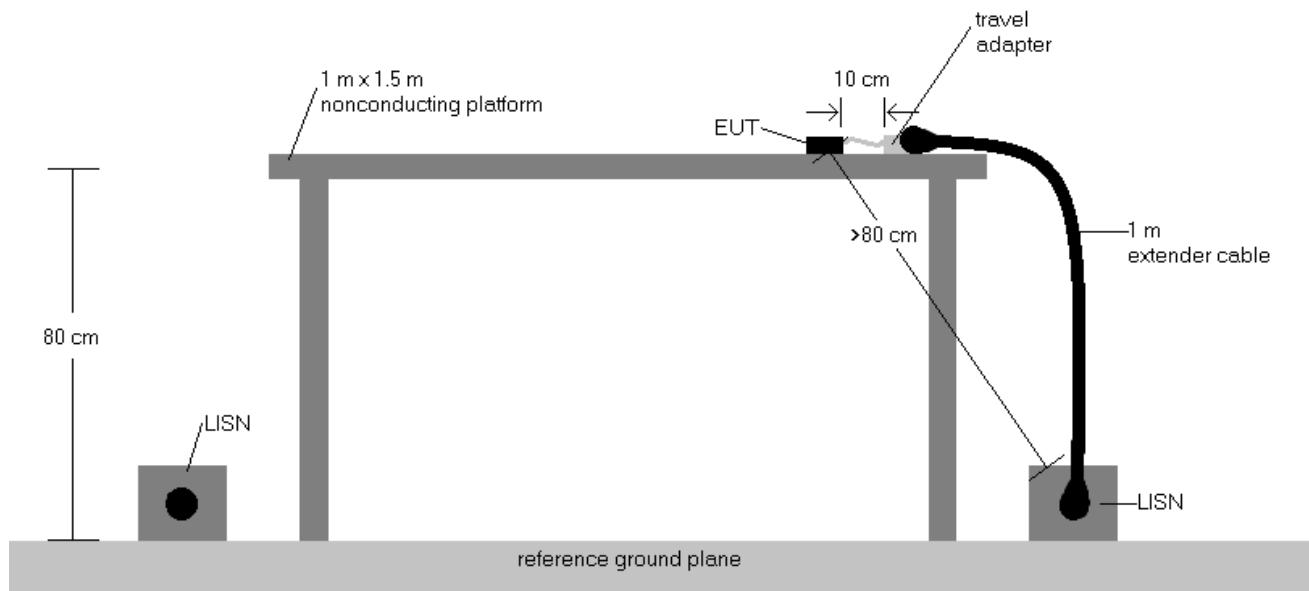


Figure 7-9. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dB μ V) = QP/AV Analyzer/Receiver Level (dB μ V) + Correction Factor (dB)
6. Margin (dB) = QP/AV Level (dB μ V) - QP/AV Limit (dB μ V)
7. Traces shown in plot are made using quasi peak and average detectors.
8. Deviations to the Specifications: None.

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 104 of 107

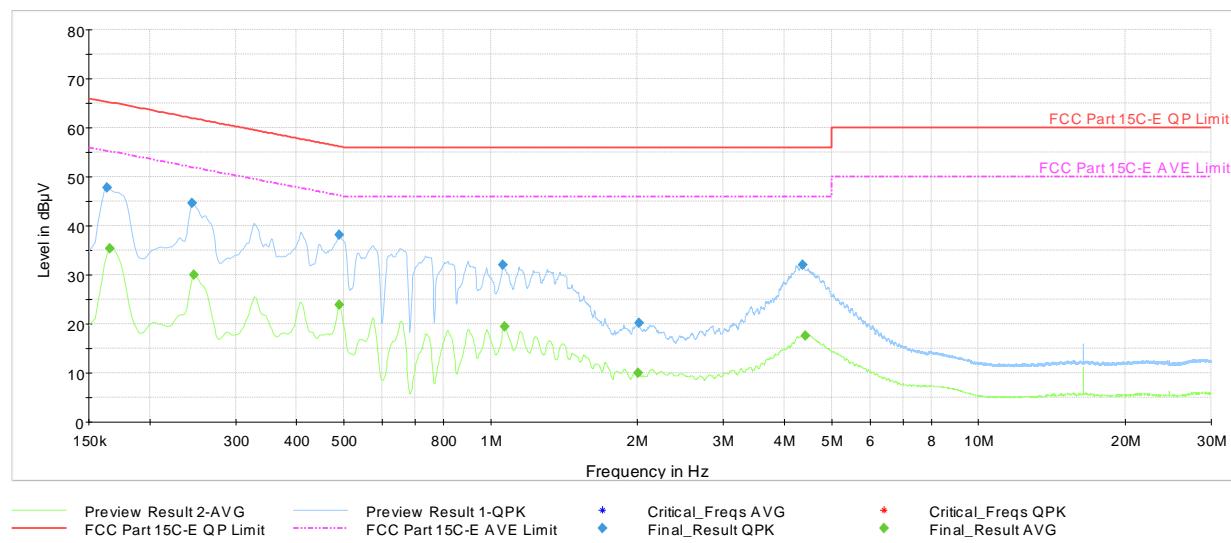


Plot 7-105. AC Line Conducted Plot with Bluetooth HDR TxBF (L1, 4Mbps ePA - Ch.38 with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.164	FINAL	47.80	---	65.28	-17.48	L1	GND
0.166	FINAL	---	35.33	55.17	-19.84	L1	GND
0.245	FINAL	44.55	---	61.94	-17.40	L1	GND
0.247	FINAL	---	30.07	51.87	-21.80	L1	GND
0.490	FINAL	---	23.97	46.17	-22.20	L1	GND
0.490	FINAL	38.09	---	56.17	-18.08	L1	GND
1.061	FINAL	31.98	---	56.00	-24.02	L1	GND
1.068	FINAL	---	19.45	46.00	-26.55	L1	GND
2.002	FINAL	---	10.03	46.00	-35.97	L1	GND
2.013	FINAL	20.15	---	56.00	-35.85	L1	GND
4.360	FINAL	31.98	---	56.00	-24.02	L1	GND
4.409	FINAL	---	17.53	46.00	-28.47	L1	GND

Table 7-26. AC Line Conducted Data with Bluetooth HDR TxBF (L1, 4Mbps ePA - Ch.38 with AC/DC Adapter)

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 105 of 107

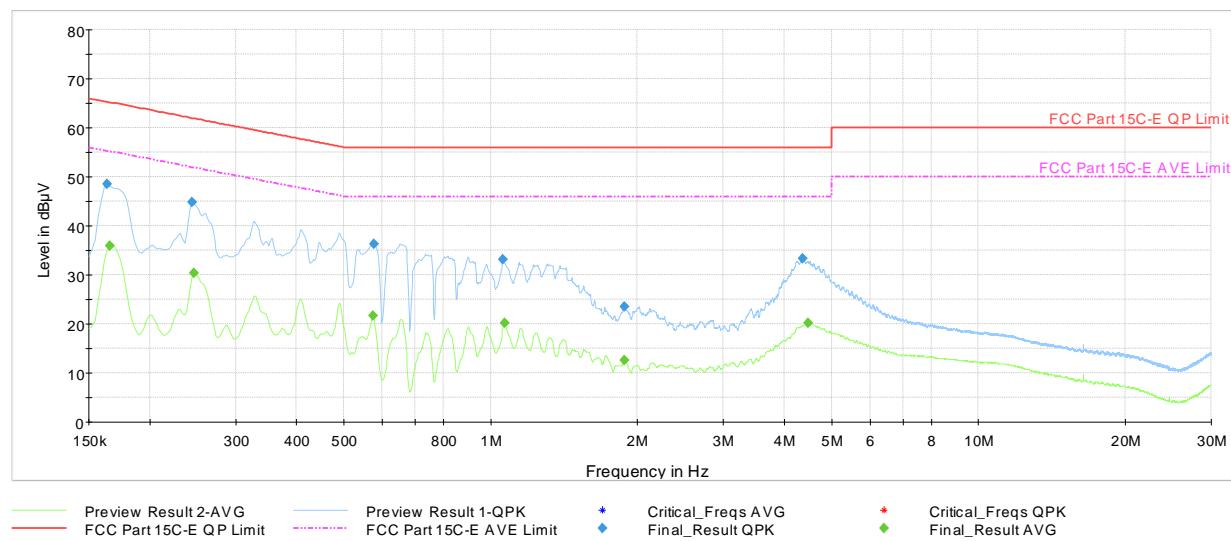

Plot 7-106. AC Line Conducted Plot with Bluetooth HDR (N, 4Mbps ePA - Ch.38 with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.164	FINAL	48.53	---	65.28	-16.75	N	GND
0.166	FINAL	---	35.97	55.17	-19.20	N	GND
0.245	FINAL	44.85	---	61.94	-17.10	N	GND
0.247	FINAL	---	30.33	51.87	-21.53	N	GND
0.573	FINAL	---	21.68	46.00	-24.32	N	GND
0.575	FINAL	36.28	---	56.00	-19.72	N	GND
1.061	FINAL	33.22	---	56.00	-22.78	N	GND
1.068	FINAL	---	20.13	46.00	-25.87	N	GND
1.878	FINAL	23.43	---	56.00	-32.57	N	GND
1.878	FINAL	---	12.52	46.00	-33.48	N	GND
4.360	FINAL	33.26	---	56.00	-22.74	N	GND
4.477	FINAL	---	20.09	46.00	-25.91	N	GND

Table 7-27. AC Line Conducted Data with Bluetooth HDR (N, 4Mbps ePA - Ch.38 with AC/DC Adapter)

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 106 of 107

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device** **FCC ID: BCGA2757 and IC: 579C-A2757** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA2757 IC: 579C-A2757	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090023-12-R1.BCG	Test Dates: 05/30/2022-09/21/2022	EUT Type: Tablet Device	Page 107 of 107