


RU242

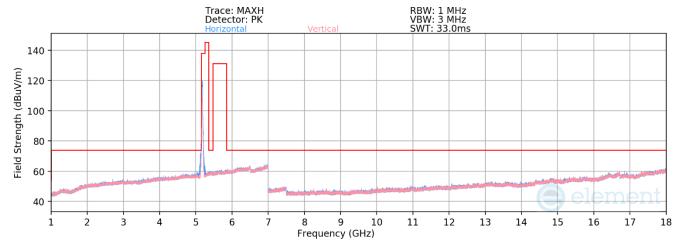

Plot 7-433. RSE above 1GHz Antenna WF5B (11ax - Ch.36 - RU242)


Mode:802.11ax (20MHz BW)Data Rate:MCS11RU Index:61Distance of Measurements:3 MetersOperating Frequency:5180MHzChannel:36

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
	10360.00	Peak	Н	-	-	-72.58	12.32	46.74	68.20	-21.46
*	15540.00	Average	Н	-	-	-85.43	18.12	39.69	53.98	-14.28
*	15540.00	Peak	Н	-	-	-74.57	18.12	50.55	73.98	-23.42

Table 7-155. Radiated Measurements Antenna WF5B (RU242)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 191 of 289	
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Fage 191 01 209	



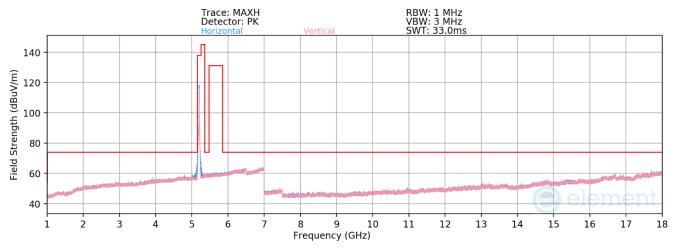

Plot 7-434. RSE above 1GHz Antenna WF5B (11ax - Ch.40 - RU242)


Mode:802.11ax (20MHz BW)Data Rate:MCS11RU Index:61Distance of Measurements:3 MetersOperating Frequency:5200MHzChannel:40

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
	10400.00	Peak	Н	-	-	-72.26	12.51	47.25	68.20	-20.95
*	15600.00	Average	Н	-	-	-85.37	18.21	39.84	53.98	-14.14
*	15600.00	Peak	Н	-	-	-74.08	18.21	51.13	73.98	-22.85

Table 7-156. Radiated Measurements Antenna WF5B (RU242)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogo 102 of 200	
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Page 192 of 289	



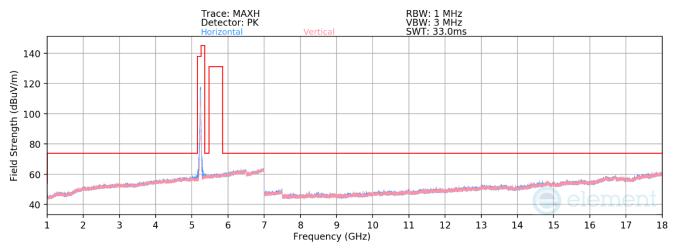

Plot 7-435. RSE above 1GHz Antenna WF5B (11ax - Ch.48 - RU242)


Mode: 802.11ax (20MHz BW) Data Rate: MCS11 RU Index: 61 Distance of Measurements: 3 Meters Operating Frequency: 5240MHz Channel: 48

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
	10480.00	Peak	Н	-	-	-72.50	12.64	47.14	68.20	-21.06
*	15720.00	Average	Н	-	-	-85.35	18.75	40.40	53.98	-13.58
*	15720.00	Peak	Н	-	•	-73.74	18.75	52.01	73.98	-21.97

Table 7-157. Radiated Measurements Antenna WF5B (RU242)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogo 102 of 200	
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Page 193 of 289	



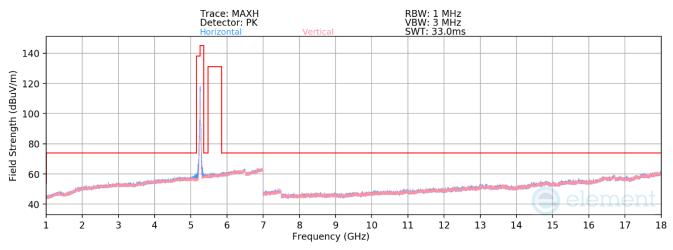

Plot 7-436. RSE above 1GHz Antenna WF5B (11ax - Ch.52 - RU242)


Mode: 802.11ax (20MHz BW) Data Rate: MCS11 **RU Index:** 61 Distance of Measurements: 3 Meters Operating Frequency: 5260MHz Channel: 52

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
	10520.00	Peak	Н	-	-	-72.38	12.63	47.25	68.20	-20.95
*	15780.00	Average	Н	-	-	-85.64	19.20	40.56	53.98	-13.42
*	15780.00	Peak	Н	-	-	-74.86	19.20	51.34	73.98	-22.64

Table 7-158. Radiated Measurements Antenna WF5B (RU242)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 194 of 289	
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Fage 194 01 209	



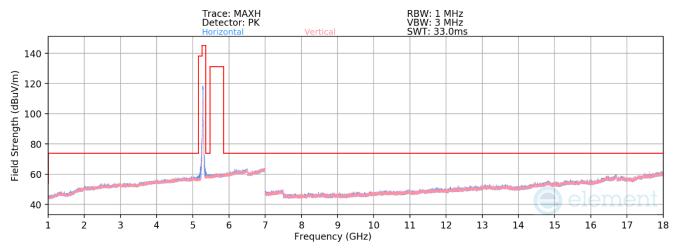

Plot 7-437. RSE above 1GHz Antenna WF5B (11ax - Ch.56 - RU242)


Mode:802.11ax (20MHz BW)Data Rate:MCS11RU Index:61Distance of Measurements:3 MetersOperating Frequency:5280MHzChannel:56

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
	10560.00	Peak	Н	-	-	-72.47	12.95	47.48	68.20	-20.72
*	15840.00	Average	Н	-	-	-85.60	19.24	40.64	53.98	-13.34
*	15840.00	Peak	Н	-	-	-74.01	19.24	52.23	73.98	-21.75

Table 7-159. Radiated Measurements Antenna WF5B (RU242)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogo 105 of 200	
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Page 195 of 289	



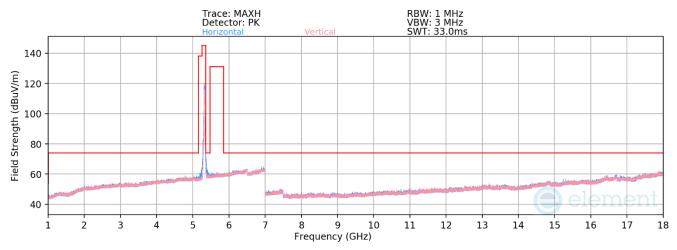

Plot 7-438. RSE above 1GHz Antenna WF5B (11ax - Ch.64 - RU242)


Mode: 802.11ax (20MHz BW) Data Rate: MCS11 RU Index: 61 Distance of Measurements: 3 Meters Operating Frequency: 5320MHz Channel: 64

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	10640.00	Average	Н	-	-	-83.62	12.36	35.74	53.98	-18.24
*	10640.00	Peak	Н	-	-	-72.42	12.36	46.94	73.98	-27.04
*	15960.00	Average	Н	-	-	-85.37	18.82	40.45	53.98	-13.52
*	15960.00	Peak	Н	-	-	-73.46	18.82	52.36	73.98	-21.61

Table 7-160. Radiated Measurements Antenna WF5B (RU242)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogo 106 of 200	
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Page 196 of 289	



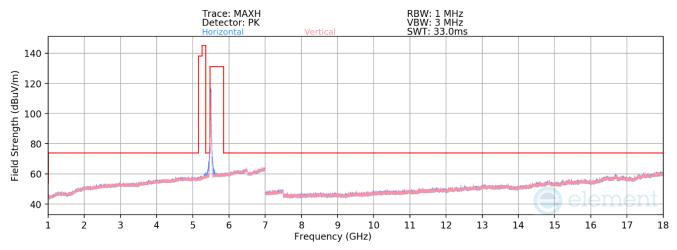

Plot 7-439. RSE above 1GHz Antenna WF5B (11ax - Ch.100 - RU242)


Mode: 802.11ax (20MHz BW) Data Rate: MCS11 **RU Index:** 61 Distance of Measurements: 3 Meters Operating Frequency: 5500MHz Channel: 100

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dΒμV/m]	Margin [dB]
*	11000.00	Average	Н	-	-	-83.82	13.08	36.26	53.98	-17.72
*	11000.00	Peak	Н	-	-	-72.65	13.08	47.43	73.98	-26.55
	16500.00	Peak	Н	-	-	-74.61	20.23	52.62	68.20	-15.58

Table 7-161. Radiated Measurements Antenna WF5B (RU242)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 197 of 289
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Page 197 01 289



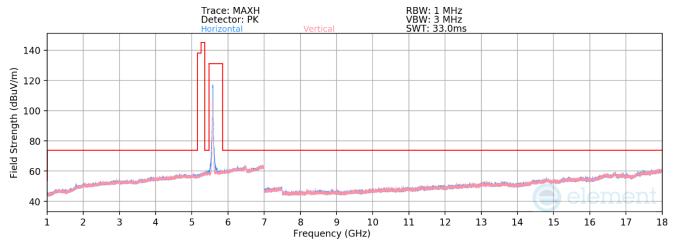

Plot 7-440. RSE above 1GHz Antenna WF5B (11ax - Ch.116 - RU242)


Mode:802.11ax (20MHz BW)Data Rate:MCS11RU Index:61Distance of Measurements:3 MetersOperating Frequency:5580MHzChannel:116

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11160.00	Average	Н	-	-	-83.69	12.65	35.96	53.98	-18.02
*	11160.00	Peak	Н	-	-	-72.27	12.65	47.38	73.98	-26.60
	16740.00	Peak	Н	-	-	-74.52	21.41	53.89	68.20	-14.31

Table 7-162. Radiated Measurements Antenna WF5B (RU242)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogo 100 of 200	
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Page 198 of 289	



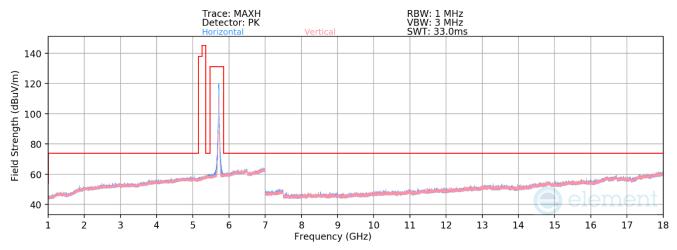

Plot 7-441. RSE above 1GHz Antenna WF5B (11ax - Ch.144 - RU242)


Mode:802.11ax (20MHz BW)Data Rate:MCS11RU Index:61Distance of Measurements:3 MetersOperating Frequency:5720MHzChannel:144

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11440.00	Average	Н	-	-	-84.04	13.23	36.19	53.98	-17.79
*	11440.00	Peak	Н	-	-	-72.88	13.23	47.35	73.98	-26.63
	17160.00	Peak	Н	-	-	-74.29	22.21	54.92	68.20	-13.28

Table 7-163. Radiated Measurements Antenna WF5B (RU242)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogo 100 of 200	
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Page 199 of 289	



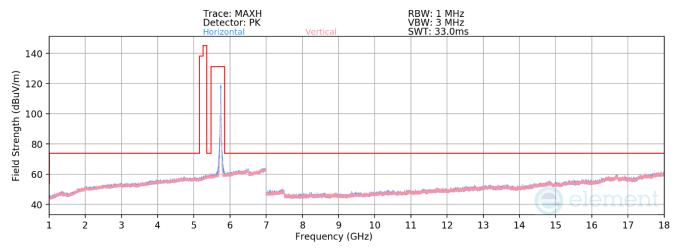

Plot 7-442. RSE above 1GHz Antenna WF5B (11ax - Ch.149 - RU242)


Mode: 802.11ax (20MHz BW) Data Rate: MCS11 **RU Index:** 61 Distance of Measurements: 3 Meters Operating Frequency: 5745MHz Channel: 149

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11490.00	Average	Н	-	-	-83.73	13.35	36.62	53.98	-17.36
*	11490.00	Peak	Н	-	-	-72.32	13.35	48.03	73.98	-25.95
	17235.00	Peak	Н	-	-	-73.15	22.33	56.18	68.20	-12.02

Table 7-164. Radiated Measurements Antenna WF5B (RU242)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogo 200 of 200	
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Page 200 of 289	



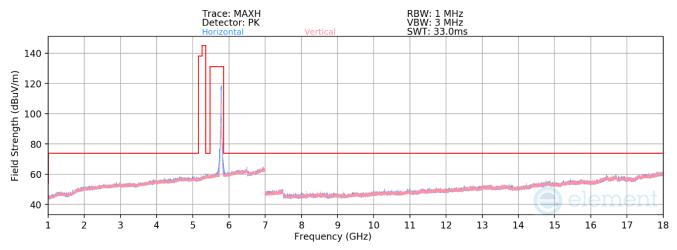

Plot 7-443. RSE above 1GHz Antenna WF5B (11ax - Ch.157 - RU242)


Mode: 802.11ax (20MHz BW) Data Rate: MCS11 RU Index: 61 Distance of Measurements: 3 Meters Operating Frequency: 5785MHz Channel: 157

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11570.00	Average	Н	-	-	-83.93	13.53	36.60	53.98	-17.38
*	11570.00	Peak	Н	-	-	-72.47	13.53	48.06	73.98	-25.92
	17355.00	Peak	Н	-	-	-73.35	22.91	56.56	68.20	-11.64

Table 7-165. Radiated Measurements Antenna WF5B (RU242)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogo 201 of 200	
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Page 201 of 289	



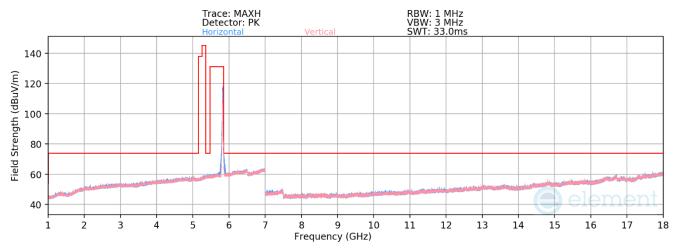

Plot 7-444. RSE above 1GHz Antenna WF5B (11ax - Ch.165 - RU242)

Mode: 802.11ax (20MHz BW)

Data Rate: MCS11

RU Index: 61

Distance of Measurements: 3 Meters

Operating Frequency: 5825MHz

Channel: 165

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dΒμV/m]	Margin [dB]
*	11650.00	Average	Н	-	-	-83.99	13.52	36.53	53.98	-17.45
*	11650.00	Peak	Н	-	-	-72.64	13.52	47.88	73.98	-26.10
	17475.00	Peak	Н	-	-	-73.39	23.62	57.23	68.20	-10.97


Table 7-166. Radiated Measurements Antenna WF5B (RU242)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogo 202 of 200	
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Page 202 of 289	



7.6.3 CDD/SDM Radiated Spurious Emissions

RU26/52

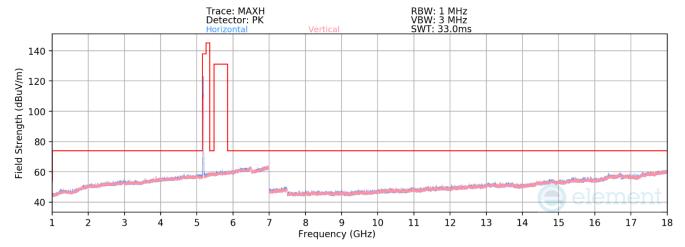

Plot 7-445. RSE above 1GHz CDD (11ax - Ch.36 - RU26)

Mode: 802.11ax (20MHz BW)

Data Rate: MCS11

RU Index: 4

Distance of Measurements: 3 Meters

Operating Frequency: 5180MHz


Channel: 36

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
	10360.00	Peak	Н	-	-	-72.39	12.32	46.93	68.20	-21.27
* [15540.00	Average	Н	-	-	-85.63	18.12	39.49	53.98	-14.48
* [15540.00	Peak	Н	-	-	-74.28	18.12	50.84	73.98	-23.13


Table 7-167. Radiated Measurements CDD (RU26)

FCC ID: BCGA2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 203 of 289	
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Fage 203 01 289	



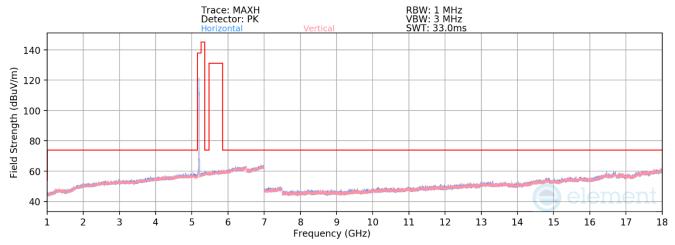


Plot 7-446. RSE above 1GHz CDD (11ax - Ch.40 - RU26)

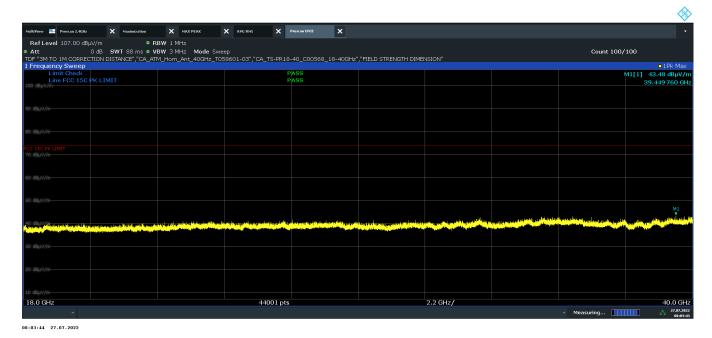

Plot 7-447. RSE 18GHz - 40 GHz CDD (11ax Ch.40 — RU26, Pol. H)

FCC ID: BCGA2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 204 of 289	
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Page 204 01 289	



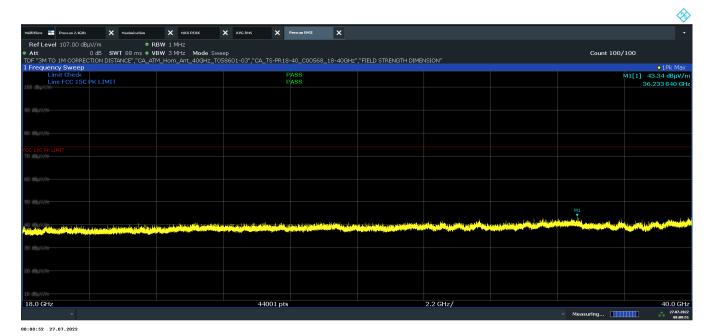

Plot 7-448. RSE 18 GHz - 40GHz CDD (11ax Ch.40 --- RU26, Pol. V)

Mode: 802.11ax (20MHz BW)

Data Rate: MCS11

RU Index: 4

Distance of Measurements: 3 Meters

Operating Frequency: 5200MHz


Channel: 40

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
	10400.00	Peak	Н	-	-	-71.97	12.51	47.54	68.20	-20.66
*	15600.00	Average	Н	-	-	-85.69	18.21	39.52	53.98	-14.46
*	15600.00	Peak	Н	-	-	-74.56	18.21	50.65	73.98	-23.33

Table 7-168. Radiated Measurements CDD (RU26)

FCC ID: BCGA2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 205 of 289	
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Page 205 01 289	



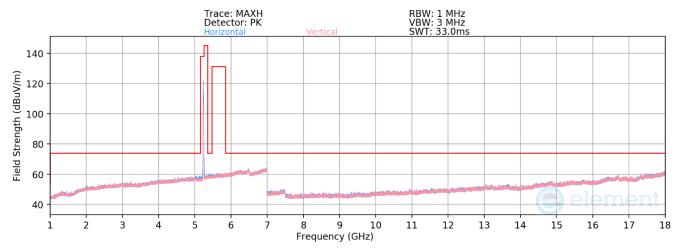

Plot 7-449. RSE above 1GHz CDD (11ax - Ch.48 - RU26)


Mode: 802.11ax (20MHz BW) Data Rate: MCS11 RU Index: 4 Distance of Measurements: 3 Meters Operating Frequency: 5240MHz Channel: 48

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
	10480.00	Peak	Н	-	-	-72.43	12.64	47.21	68.20	-20.99
*	15720.00	Average	Н	-	-	-85.71	18.75	40.04	53.98	-13.94
*	15720.00	Peak	Н	-	-	-74.43	18.75	51.32	73.98	-22.66

Table 7-169. Radiated Measurements CDD (RU26)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 206 of 289	
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device		



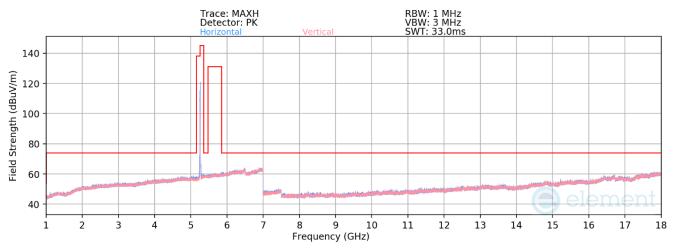

Plot 7-450. RSE above 1GHz CDD (11ax - Ch.52 - RU52)


Mode: 802.11ax (20MHz BW) Data Rate: MCS11 RU Index: 38 Distance of Measurements: 3 Meters Operating Frequency: 5260MHz Channel: 52

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
	10520.00	Peak	Н	-	-	-71.00	12.63	48.63	68.20	-19.57
*	15780.00	Average	Н	-	-	-81.12	19.20	45.08	53.98	-8.90
*	15780.00	Peak	Н	-	-	-65.85	19.20	60.35	73.98	-13.63


Table 7-170. Radiated Measurements CDD (RU52)

FCC ID: BCGA2759 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 207 of 289
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Fage 207 01 209



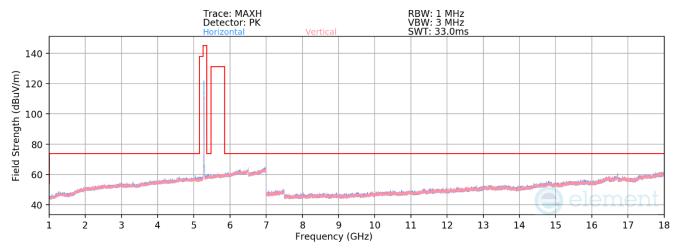


Plot 7-451. RSE above 1GHz CDD (11ax - Ch.56 - RU52)

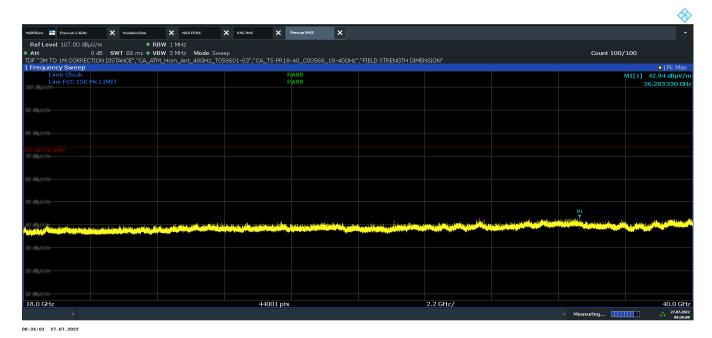

Plot 7-452. RSE 18GHz - 40 GHz CDD (11ax Ch.56 - RU52, Pol. H)

FCC ID: BCGA2759		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 208 of 289	
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Fage 206 01 269	



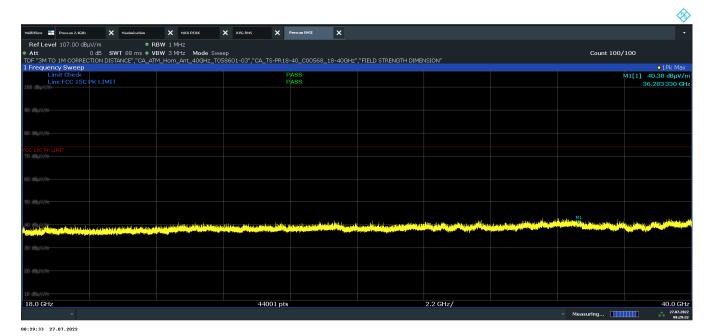

Plot 7-453. RSE 18 GHz - 40GHz CDD (11ax Ch.56 --- RU52, Pol. V)


Mode:	802.11ax (20MHz BW)
Data Rate:	MCS11
RU Index:	38
Distance of Measurements:	3 Meters
Operating Frequency:	5280MHz
Channel:	56

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
	10560.00	Peak	Н	-	-	-70.46	12.95	49.49	68.20	-18.71
*	15840.00	Average	Н	-	-	-83.83	19.24	42.41	53.98	-11.57
*	15840.00	Peak	Н	-	-	-72.42	19.24	53.82	73.98	-20.16

Table 7-171. Radiated Measurements CDD (RU52)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 209 of 289	
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Fage 209 01 289	



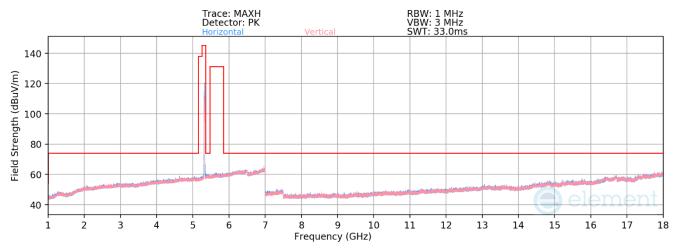

Plot 7-454. RSE above 1GHz CDD (11ax - Ch.64 - RU52)

Mode: 802.11ax (20MHz BW)

Data Rate: MCS11

RU Index: 38

Distance of Measurements: 3 Meters

Operating Frequency: 5320MHz


Channel: 64

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	10640.00	Average	Н	-	-	-82.16	12.36	37.20	53.98	-16.78
*	10640.00	Peak	Н	-	-	-71.03	12.36	48.33	73.98	-25.65
*	15960.00	Average	Н	-	-	-83.06	18.82	42.76	53.98	-11.21
*	15960.00	Peak	Н	-	-	-69.74	18.82	56.08	73.98	-17.89

Table 7-172. Radiated Measurements CDD (RU52)

FCC ID: BCGA2759 IC: 579C-A2759	element	element MEASUREMENT REPORT (CERTIFICATION)		
Test Report S/N:	Test Dates:	EUT Type:	Page 210 of 289	
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Fage 210 01 289	



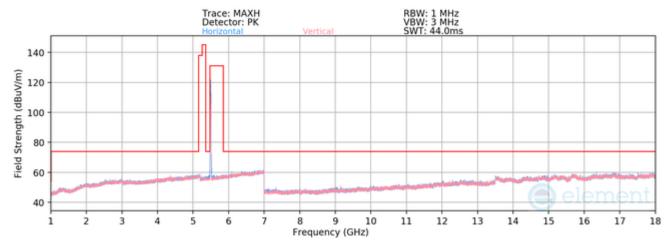

Plot 7-455. RSE above 1GHz SDM (11ax - Ch.100 - RU52)


Mode: 802.11ax (20MHz BW) Data Rate: MCS11 RU Index: 38 Distance of Measurements: 3 Meters Operating Frequency: 5500MHz Channel: 100

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11000.00	Average	Н	-	-	-82.41	13.08	37.67	53.98	-16.31
*	11000.00	Peak	Н	-	-	-71.57	13.08	48.51	73.98	-25.47
	16500.00	Peak	Н	-	-	-72.50	20.23	54.73	68.20	-13.47


Table 7-173. Radiated Measurements SDM (RU52)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogo 211 of 200	
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Page 211 of 289	



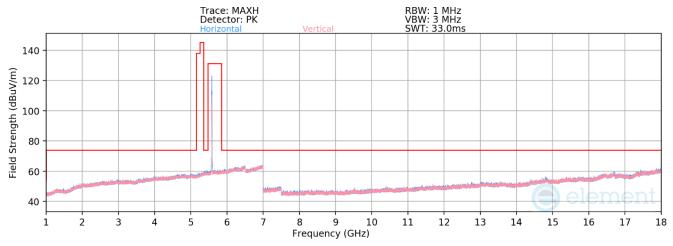


Plot 7-456. RSE above 1GHz SDM (11ax - Ch.116 - RU52)

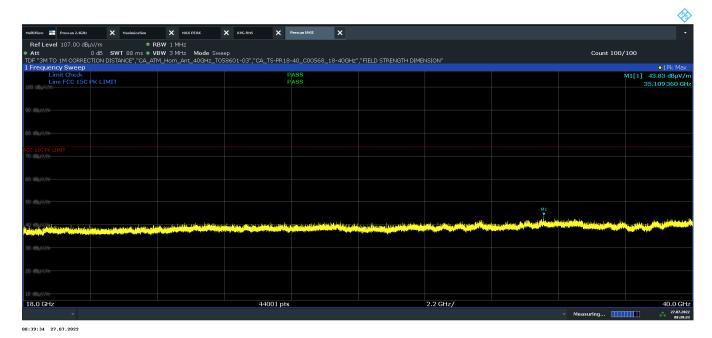

Plot 7-457. RSE 18GHz - 40 GHz SDM (11ax Ch.116 --- RU52, Pol. H)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 212 of 289	
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Fage 212 01 209	



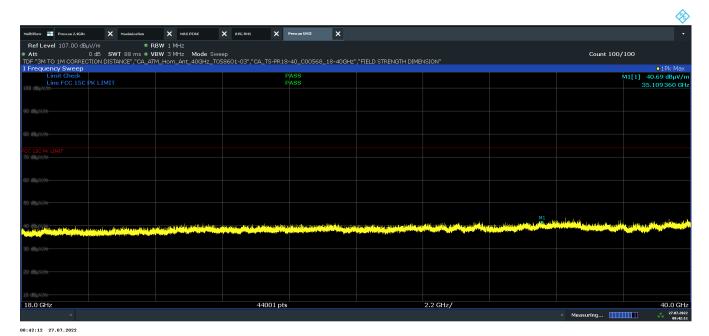

Plot 7-458. RSE 18 GHz - 40GHz SDM (11ax Ch.116 — RU52, Pol. V)

Mode: 802.11ax (20MHz BW)

Data Rate: MCS11

RU Index: 38

Distance of Measurements: 3 Meters

Operating Frequency: 5580MHz


Channel: 116

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11160.00	Average	Н	-	-	-82.54	12.65	37.11	53.98	-16.87
*	11160.00	Peak	Н	-	-	-71.32	12.65	48.33	73.98	-25.65
	16740.00	Peak	Н	-	-	-72.60	21.41	55.81	68.20	-12.39

Table 7-174. Radiated Measurements SDM (RU52)

FCC ID: BCGA2759 IC: 579C-A2759	element	ement MEASUREMENT REPORT (CERTIFICATION)		
Test Report S/N:	Test Dates:	EUT Type:	Page 213 of 289	
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Fage 213 01 289	



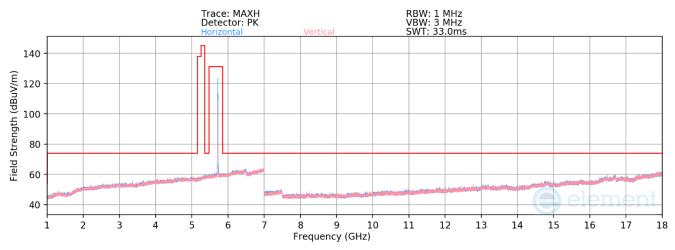

Plot 7-459. RSE above 1GHz SDM (11ax - Ch.144 - RU52)

 Mode:
 802.11ax (20MHz BW)

 Data Rate:
 MCS11

 RU Index:
 38

 Distance of Measurements:
 3 Meters

 Operating Frequency:
 5720MHz


 Channel:
 144

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11440.00	Average	Н	-	-	-82.78	13.23	37.45	53.98	-16.53
*	11440.00	Peak	Н	-	-	-71.46	13.23	48.77	73.98	-25.21
	17160.00	Peak	Н	•	•	-71.65	22.21	57.56	68.20	-10.64

Table 7-175. Radiated Measurements SDM (RU52)

FCC ID: BCGA2759 IC: 579C-A2759	element	element MEASUREMENT REPORT (CERTIFICATION)		
Test Report S/N:	Test Dates:	EUT Type:	Page 214 of 289	
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Fage 214 01 269	



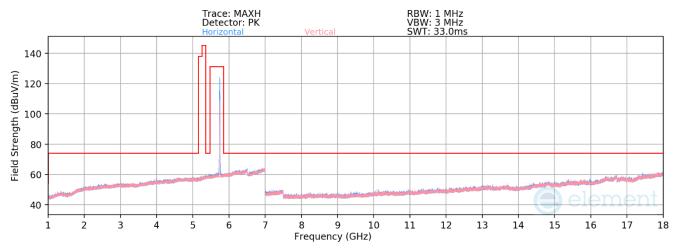

Plot 7-460. RSE above 1GHz CDD (11ax - Ch.149 - RU26)


Mode: 802.11ax (20MHz BW) Data Rate: MCS11 RU Index: 4 Distance of Measurements: 3 Meters Operating Frequency: 5745MHz Channel: 149

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11490.00	Average	Н	-	-	-82.52	13.35	37.83	53.98	-16.15
*	11490.00	Peak	Н	-	-	-71.65	13.35	48.70	73.98	-25.28
	17235.00	Peak	Н	-	-	-71.34	22.33	57.99	68.20	-10.21


Table 7-176. Radiated Measurements CDD (RU26)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogo 215 of 200	
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Page 215 of 289	



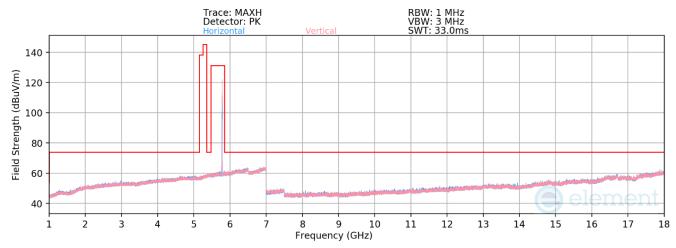


Plot 7-461. RSE above 1GHz CDD (11ax - Ch.157 - RU26)

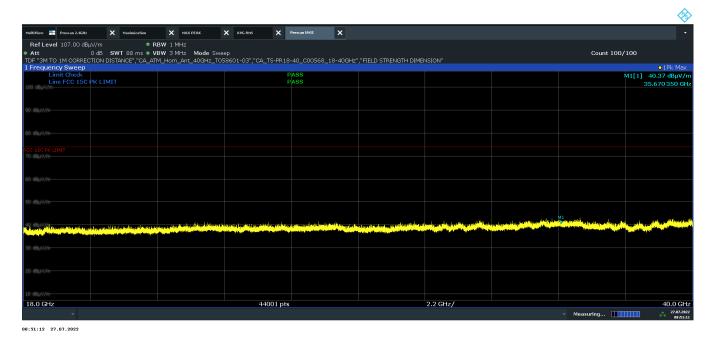

Plot 7-462. RSE 18GHz - 40 GHz CDD (11ax Ch.157 — RU26, Pol. H)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 216 of 200
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Page 216 of 289



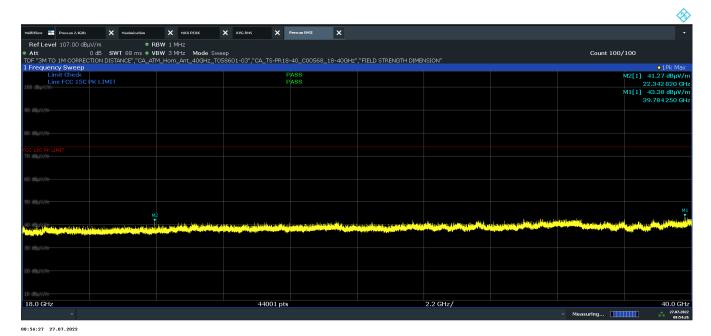

Plot 7-463. RSE 18 GHz - 40GHz CDD (11ax Ch.157 — RU26, Pol. V)


Mode:	802.11ax (20MHz BW)
Data Rate:	MCS11
RU Index:	4
Distance of Measurements:	3 Meters
Operating Frequency:	5785MHz
Channel:	157

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11570.00	Average	Н	-	-	-82.46	13.53	38.07	53.98	-15.91
*	11570.00	Peak	Н	-	-	-71.42	13.53	49.11	73.98	-24.87
	17355.00	Peak	Н	-	-	-71.36	22.91	58.55	68.20	-9.65

Table 7-177. Radiated Measurements CDD (RU26)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 217 of 289
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Fage 217 01 289



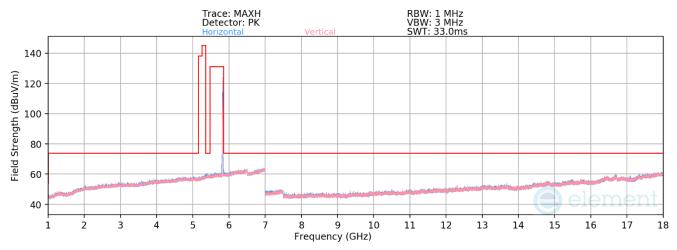

Plot 7-464. RSE above 1GHz CDD (11ax - Ch.165 - RU26)

Mode: 802.11ax (20MHz BW) Data Rate: MCS11 4 RU Index: Distance of Measurements: 3 Meters Operating Frequency: 5825MHz Channel: 165


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11650.00	Average	Н	-	-	-82.61	13.52	37.91	53.98	-16.07
*	11650.00	Peak	Н	-	-	-70.80	13.52	49.72	73.98	-24.26
	17475.00	Peak	Н	-	-	-71.20	23.62	59.42	68.20	-8.78

Table 7-178. Radiated Measurements CDD (RU26)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 218 of 289	
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Page 218 01 289	



RU242

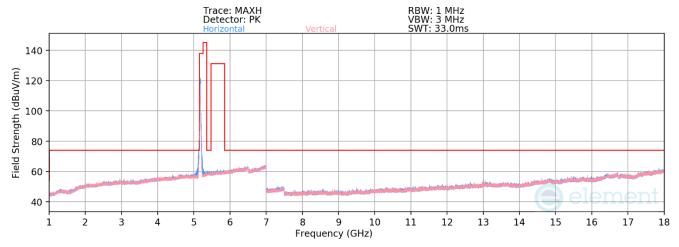

Plot 7-465. RSE above 1GHz CDD (11ax - Ch.36 - RU242)


Mode: 802.11ax (20MHz BW) Data Rate: MCS11 **RU Index:** 61 Distance of Measurements: 3 Meters Operating Frequency: 5180MHz Channel: 36

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
	10360.00	Peak	Н	-	-	-70.79	12.32	48.53	68.20	-19.67
*	15540.00	Average	Н	-	-	-83.36	18.14	41.78	53.98	-12.20
*	15540.00	Peak	Н	-	-	-72.18	18.14	52.96	73.98	-21.02


Table 7-179. Radiated Measurements CDD (RU242)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogo 210 of 200	
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Page 219 of 289	



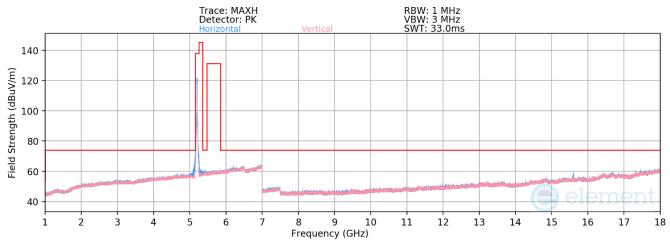


Plot 7-466. RSE above 1GHz CDD (11ax - Ch.40 - RU242)

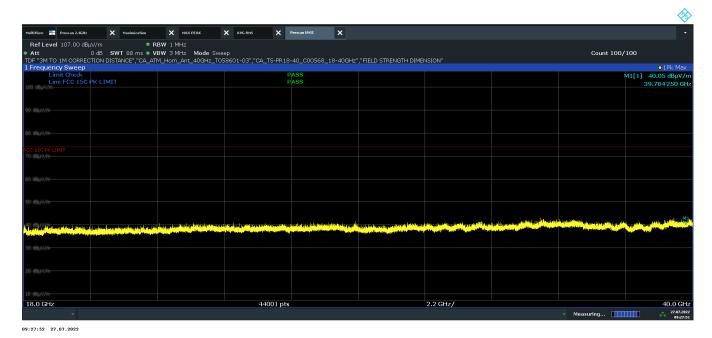

Plot 7-467. RSE 18GHz - 40 GHz CDD (11ax Ch.40 --- RU242, Pol. H)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 220 of 289	
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Fage 220 01 289	



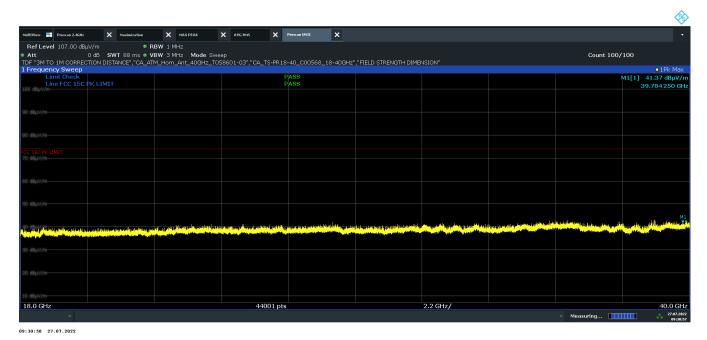

Plot 7-468. RSE 18 GHz - 40GHz CDD (11ax Ch.40 -- RU242, Pol. V)

Mode: 802.11ax (20MHz BW)

Data Rate: MCS11

RU Index: 61

Distance of Measurements: 3 Meters

Operating Frequency: 5200MHz


Channel: 40

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
	10400.00	Peak	Н	-	-	-71.17	12.51	48.34	68.20	-19.86
*	15600.00	Average	Н	-	-	-83.39	18.21	41.82	53.98	-12.16
*	15600.00	Peak	Н	-	-	-72.93	18.21	52.28	73.98	-21.70

Table 7-180. Radiated Measurements CDD (RU242)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogo 221 of 200	
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Page 221 of 289	



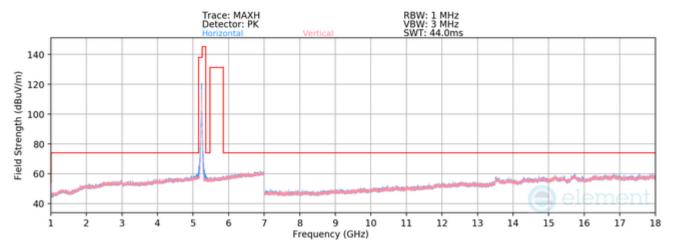

Plot 7-469. RSE above 1GHz CDD (11ax – Ch.48 – RU242)


Mode: 802.11ax (20MHz BW) Data Rate: MCS11 RU Index: 61 Distance of Measurements: 3 Meters Operating Frequency: 5240MHz Channel: 48

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
	10480.00	Peak	Н	-	-	-71.41	15.15	50.74	68.20	-17.46
*	15720.00	Average	Н	-	-	-83.76	23.45	46.69	53.98	-7.29
*	15720.00	Peak	Н	-	-	-72.56	23.45	57.89	73.98	-16.09

Table 7-181. Radiated Measurements CDD (RU242)

FCC ID: BCGA2759 IC: 579C-A2759	element	ement MEASUREMENT REPORT (CERTIFICATION)	
Test Report S/N:	Test Dates:	EUT Type:	Dogo 222 of 280
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Page 222 of 289



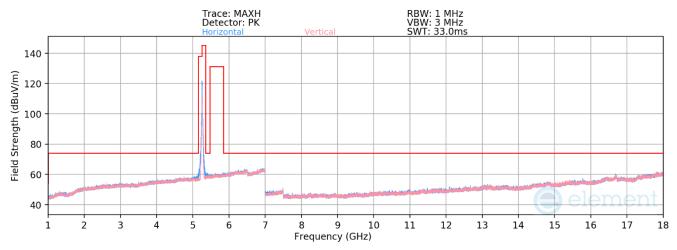

Plot 7-470. RSE above 1GHz CDD (11ax - Ch.52 - RU242)


Mode: 802.11ax (20MHz BW) Data Rate: MCS11 RU Index: 61 Distance of Measurements: 3 Meters Operating Frequency: 5260MHz Channel: 52

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
	10520.00	Peak	Н	-	-	-70.82	12.63	48.81	68.20	-19.39
*	15780.00	Average	Н	-	-	-83.70	19.20	42.50	53.98	-11.48
*	15780.00	Peak	Н	-	-	-72.69	19.20	53.51	73.98	-20.47

Table 7-182. Radiated Measurements CDD (RU242)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 222 of 280
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Page 223 of 289



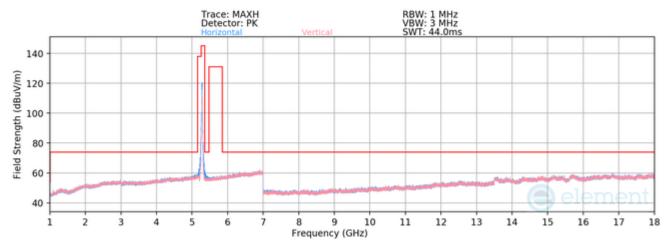


Plot 7-471. RSE above 1GHz CDD (11ax - Ch.56 - RU242)



Plot 7-472. RSE 18GHz - 40 GHz CDD (11ax Ch.56 - RU242, Pol. H)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 224 of 280
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Page 224 of 289



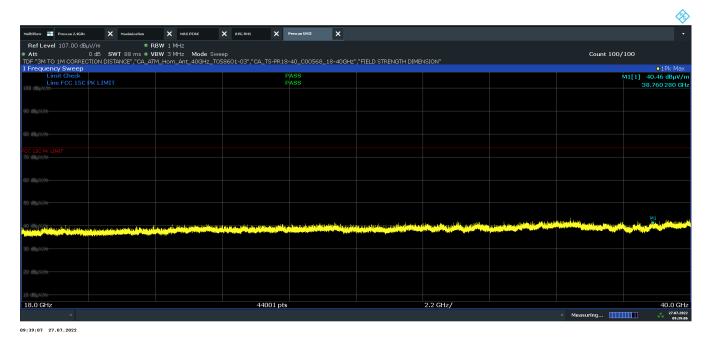

Plot 7-473. RSE 18 GHz - 40GHz CDD (11ax Ch.56 --- RU242, Pol. V)


Mode:	802.11ax (20MHz BW)
Data Rate:	MCS11
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	5280MHz
Channel:	56

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
	10560.00	Peak	Н	-	-	-70.92	14.79	50.87	68.20	-17.33
*	15840.00	Average	Н	-	-	-83.51	21.90	45.39	53.98	-8.59
*	15840.00	Peak	Н	-	-	-72.56	21.90	56.34	73.98	-17.64

Table 7-183. Radiated Measurements CDD (RU242)

FCC ID: BCGA2759 IC: 579C-A2759	element	element MEASUREMENT REPORT (CERTIFICATION)	
Test Report S/N:	Test Dates:	EUT Type:	Page 225 of 289
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Fage 225 01 269



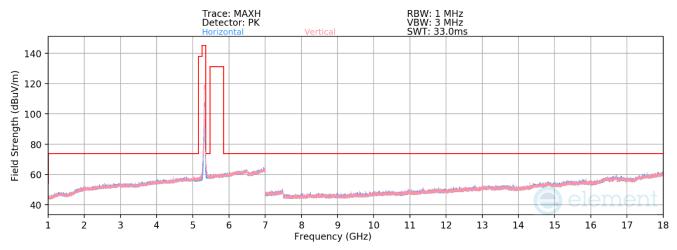

Plot 7-474. RSE above 1GHz CDD (11ax - Ch.64 - RU242)

Mode: 802.11ax (20MHz BW)

Data Rate: MCS11

RU Index: 61

Distance of Measurements: 3 Meters

Operating Frequency: 5320MHz


Channel: 64

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	10640.00	Average	Н	-	•	-82.05	12.36	37.31	53.98	-16.67
*	10640.00	Peak	Н	-	-	-71.15	12.36	48.21	73.98	-25.77
*	15960.00	Average	Н	-	-	-83.58	18.82	42.24	53.98	-11.73
*	15960.00	Peak	Н	-	-	-72.29	18.82	53.53	73.98	-20.44

Table 7-184. Radiated Measurements CDD (RU242)

FCC ID: BCGA2759 IC: 579C-A2759	element	element MEASUREMENT REPORT (CERTIFICATION)	
Test Report S/N:	Test Dates:	EUT Type:	Page 226 of 289
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Page 226 01 269



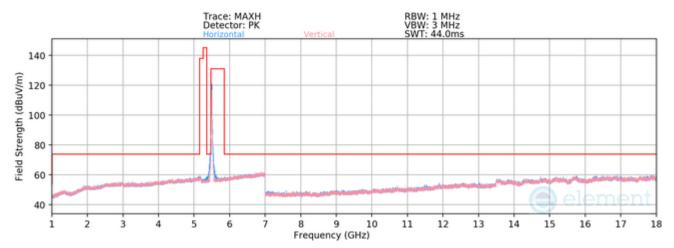

Plot 7-475. RSE above 1GHz CDD (11ax - Ch.100 - RU242)


Mode: 802.11ax (20MHz BW) Data Rate: MCS11 RU Index: 61 Distance of Measurements: 3 Meters Operating Frequency: 5500MHz Channel: 100

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11000.00	Average	Н	-	-	-82.46	13.08	37.62	53.98	-16.36
*	11000.00	Peak	Н	-	-	-71.23	13.08	48.85	73.98	-25.13
	16500.00	Peak	Н	-	-	-71.94	20.23	55.29	68.20	-12.91


Table 7-185. Radiated Measurements CDD (RU242)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 227 of 289
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Page 227 01 289



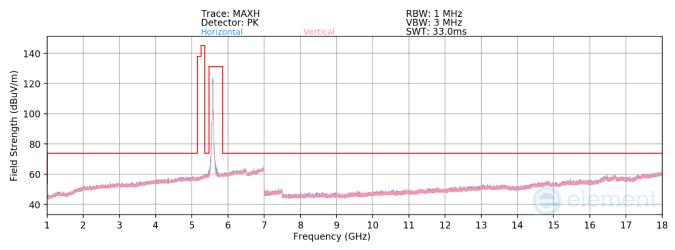


Plot 7-476. RSE above 1GHz SDM (11ax - Ch.116 - RU242)

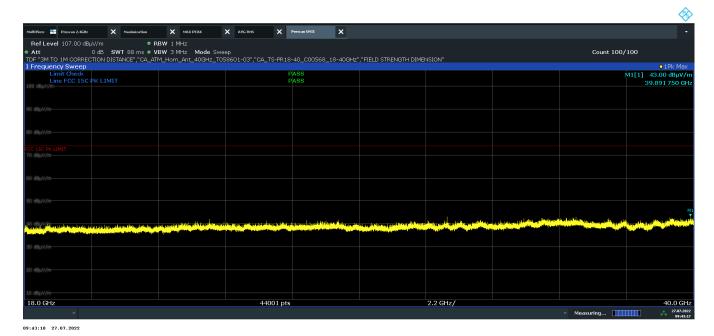

Plot 7-477. RSE 18GHz - 40 GHz SDM (11ax Ch.116 - RU242, Pol. H)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogo 229 of 290	
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Page 228 of 289	



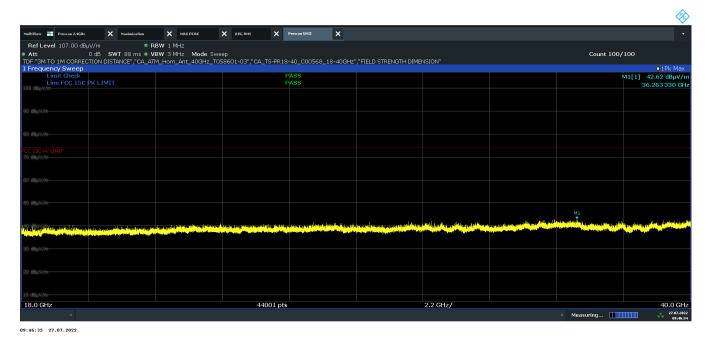

Plot 7-478. RSE 18 GHz - 40GHz SDM (11ax Ch.116 --- RU242, Pol. V)


Mode:	802.11ax (20MHz BW)
Data Rate:	MCS11
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	5580MHz
Channel:	116

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11160.00	Average	Н	-	-	-82.34	12.65	37.31	53.98	-16.67
*	11160.00	Peak	Н	-	-	-71.37	12.65	48.28	73.98	-25.70
	16740.00	Peak	Н	-	-	-71.93	21.41	56.48	68.20	-11.72

Table 7-186. Radiated Measurements SDM (RU242)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 220 of 280
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Page 229 of 289



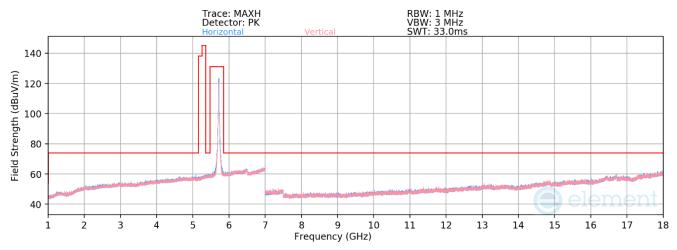

Plot 7-479. RSE above 1GHz SDM (11ax - Ch.144 - RU242)

Mode: 802.11ax (20MHz BW)

Data Rate: MCS11

RU Index: 61

Distance of Measurements: 3 Meters

Operating Frequency: 5720MHz


Channel: 144

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11440.00	Average	Н	-	-	-82.58	13.23	37.65	53.98	-16.33
*	11440.00	Peak	Н	-	-	-71.25	13.23	48.98	73.98	-25.00
	17160.00	Peak	Н	-	-	-71.38	22.21	57.83	68.20	-10.37

Table 7-187. Radiated Measurements SDM (RU242)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 220 of 200
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Page 230 of 289



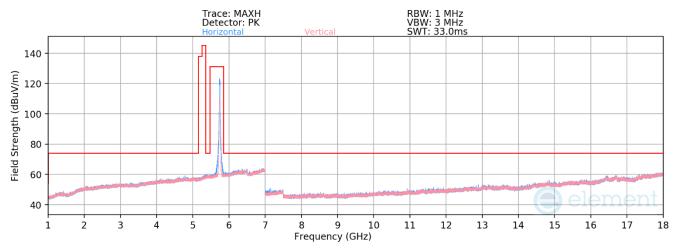

Plot 7-480. RSE above 1GHz CDD (11ax - Ch.149 - RU242)


Mode: 802.11ax (20MHz BW) Data Rate: MCS11 RU Index: 61 Distance of Measurements: 3 Meters Operating Frequency: 5745MHz Channel: 149

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11490.00	Average	Н	-	-	-82.59	13.35	37.76	53.98	-16.22
*	11490.00	Peak	Н	-	-	-71.61	13.35	48.74	73.98	-25.24
	17235.00	Peak	Н	-	-	-70.73	22.33	58.60	68.20	-9.60


Table 7-188. Radiated Measurements CDD (RU242)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 231 of 289	
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Fage 231 01 209	



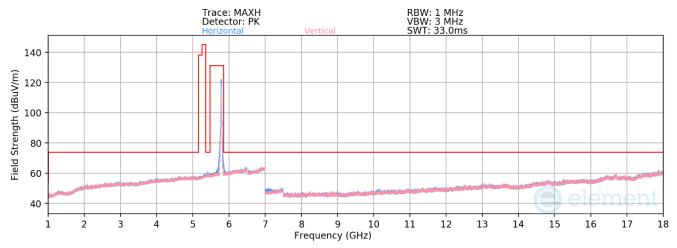


Plot 7-481. RSE above 1GHz CDD (11ax - Ch.157 - RU242)

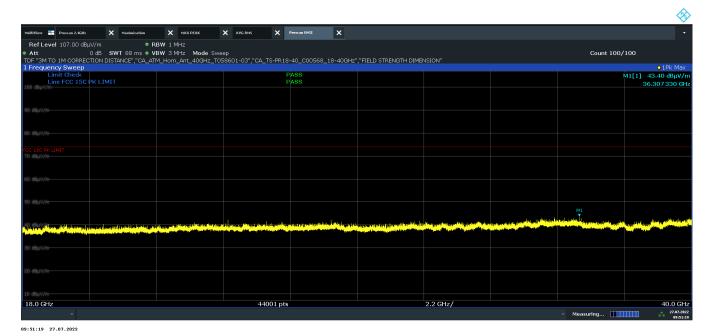

Plot 7-482. RSE 18GHz - 40 GHz CDD (11ax Ch.157 - RU242, Pol. H)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 232 of 289
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Page 232 01 269



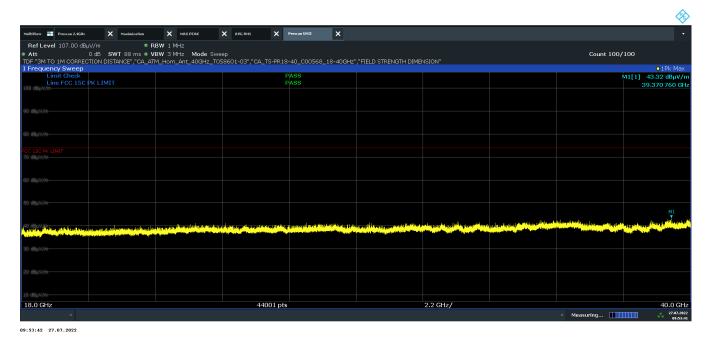

Plot 7-483. RSE 18 GHz - 40GHz CDD (11ax Ch.157 — RU242, Pol. V)


Mode:802.11ax (20MHz BW)Data Rate:MCS11RU Index:61Distance of Measurements:3 MetersOperating Frequency:5785MHzChannel:157

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11570.00	Average	Н	-	-	-82.53	13.53	38.00	53.98	-15.98
*	11570.00	Peak	Н	-	-	-71.23	13.53	49.30	73.98	-24.68
	17355.00	Peak	Н	-	-	-71.25	22.91	58.66	68.20	-9.54

Table 7-189. Radiated Measurements CDD (RU242)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogo 222 of 200	
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Page 233 of 289	



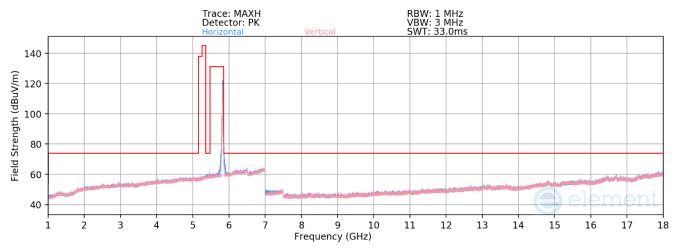

Plot 7-484. RSE above 1GHz CDD (11ax - Ch.165 - RU242)

Mode: 802.11ax (20MHz BW) Data Rate: MCS11 RU Index: 61 Distance of Measurements: 3 Meters Operating Frequency: 5825MHz Channel: 165

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11650.00	Average	Н	-	-	-82.45	13.52	38.07	53.98	-15.91
*	11650.00	Peak	Н	-	-	-71.06	13.52	49.46	73.98	-24.52
	17475.00	Peak	Н	-	-	-71.36	23.62	59.26	68.20	-8.94

Table 7-190. Radiated Measurements CDD (RU242)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 224 of 280
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Page 234 of 289




7.6.4 Antenna WF5T Radiated Band Edge Measurements (20MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]; RSS-Gen [8.9]


RU26/RU52




Plot 7-485. Antenna WF5T (Pk & Avg, RU26, Index 0, Ch.36, MCS11)

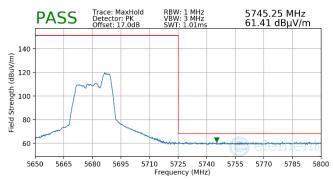


Plot 7-488. Antenna WF5T (Pk, RU52, Index 40, Ch.136, MCS11)

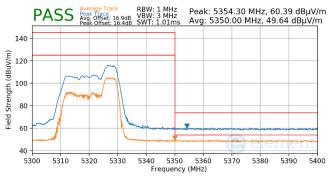


Plot 7-486. Antenna WF5T (Pk & Avg, RU52, Index 40, Ch.64, MCS11)

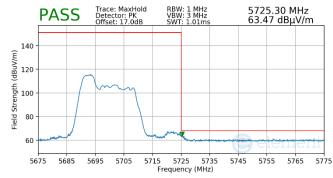

Plot 7-489. Antenna WF5T (Pk, RU52, Index 37, Ch.140, MCS11)

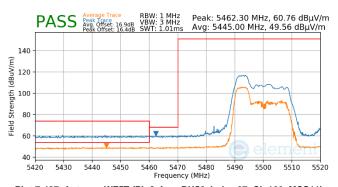


Plot 7-487. Antenna WF5T (Pk & Avg, RU52, Index 37, Ch.100, MCS11)

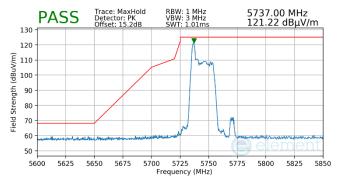

Plot 7-490. Antenna WF5T (Pk, RU26, Index 0, Ch.149, MCS11)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 235 of 289
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Fage 233 01 289



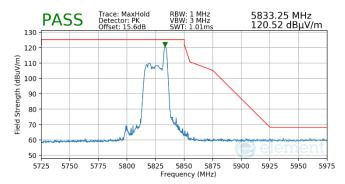


Plot 7-491. Antenna WF5T (Pk, RU26, Index 8, Ch.165, MCS11)


FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 226 of 280
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Page 236 of 289



RU242

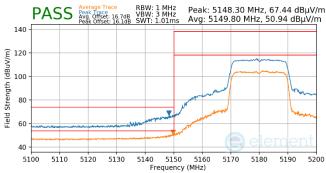


Plot 7-492. Antenna WF5T (Pk & Avg, RU242, Index 61, Ch.36, MCS11)

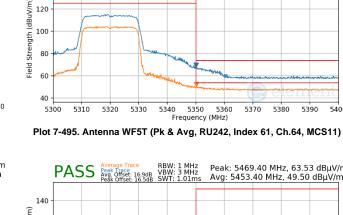


PASS Average Trace
Peak Trace
Avg. Offset: 14.9dB

140

120

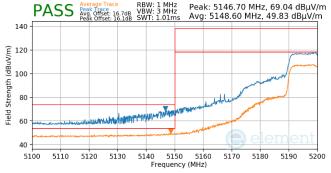

Plot 7-493. Antenna WF5T (Pk & Avg, RU242, Index 61, Ch.40, MCS11)

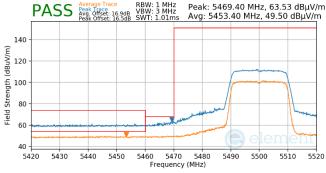

5360

5370


5380

Peak: 5350.10 MHz, 68.22 dBμV/m Avg: 5350.20 MHz, 50.57 dBμV/m


5390

5400

Plot 7-496. Antenna WF5T (Pk & Avg, RU242, Index 61, Ch.100, MCS11)

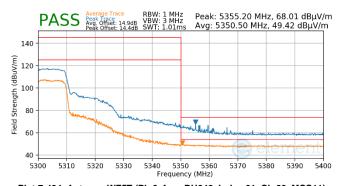

Plot 7-494. Antenna WF5T (Pk & Avg, RU242, Index 61, Ch.60, MCS11)

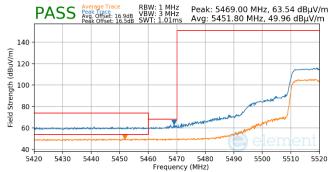

Plot 7-497. Antenna WF5T (Pk & Avg, RU242, Index 61, Ch.104, MCS11)

FCC ID: BCGA2759 IC: 579C-A2759	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 237 of 289
1C2205090024-10.BCG	05/30/2022-9/22/2022	Tablet Device	Page 237 01 289