



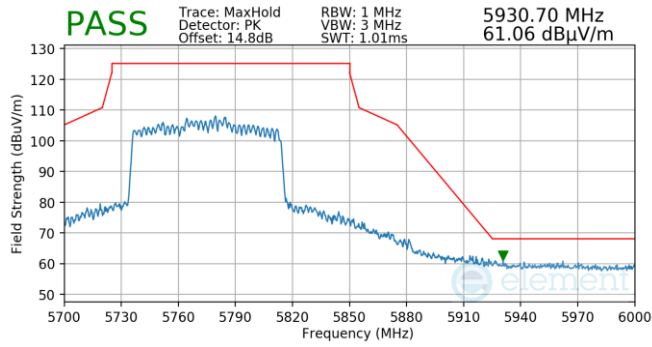


Plot 7-1216. Antenna 4a (Pk, Ch.155, 802.11ax(SU), MCS4)

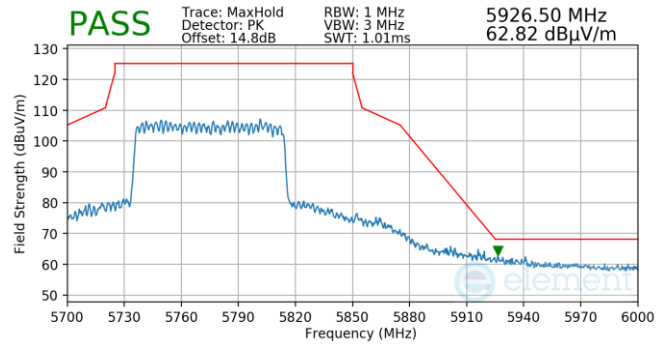


Plot 7-1217. Antenna 4a (Pk, Ch.155, 802.11ax(SU), MCS11)

FCC ID: BCGA2764 IC: 579C-A2764	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-19.BCG	Test Dates: 05/30/2022-09/30/2022	EUT Type: Tablet Device	Page 350 of 365


V 10.5 12/15/2021

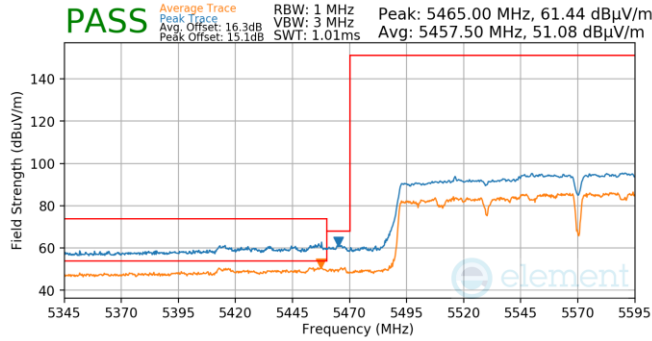


Plot 7-1225. (FCC Only) Antenna 4a (Pk & Avg, Ch.114, 802.11n, MCS4)

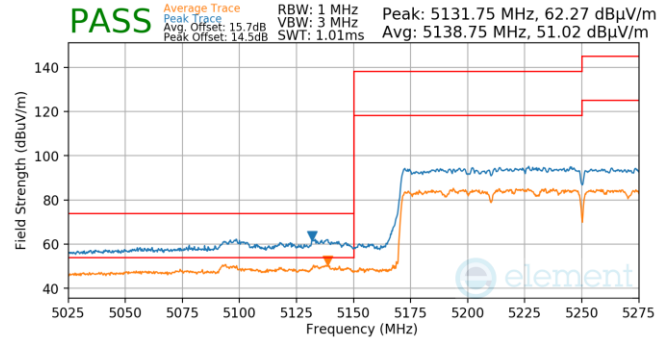


Plot 7-1229. Antenna 4a (Pk & Avg, Ch.50, 802.11ax(SU), MCS11)

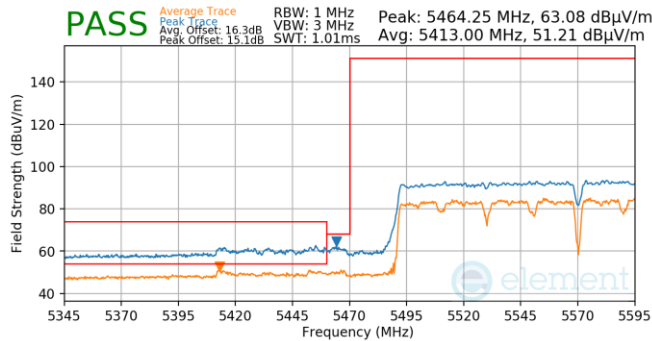


Plot 7-1226. (FCC Only) Antenna 4a (Pk & Avg, Ch.114, 802.11n, MCS11)

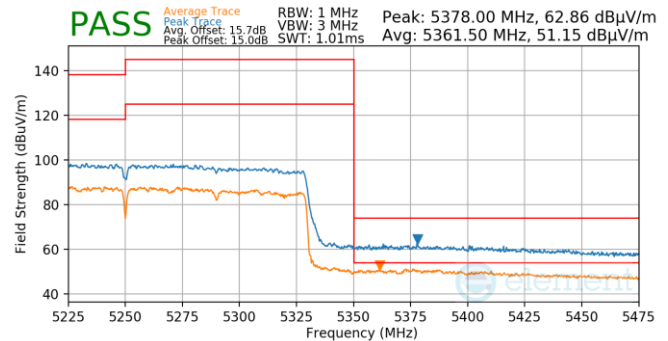


Plot 7-1230. Antenna 4a (Pk & Avg, Ch.50, 802.11ax(SU), MCS2)

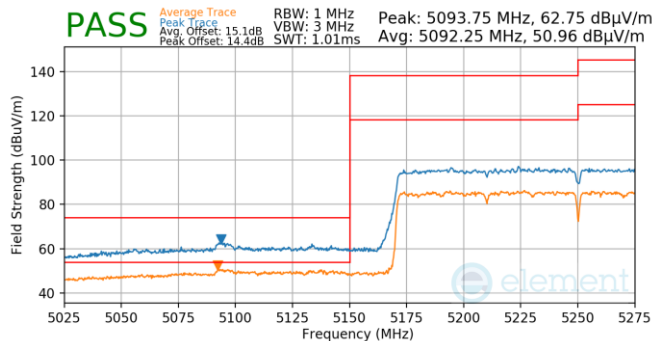


Plot 7-1227. Antenna 4a (Pk & Avg, Ch.50, 802.11ax(SU), MCS2)

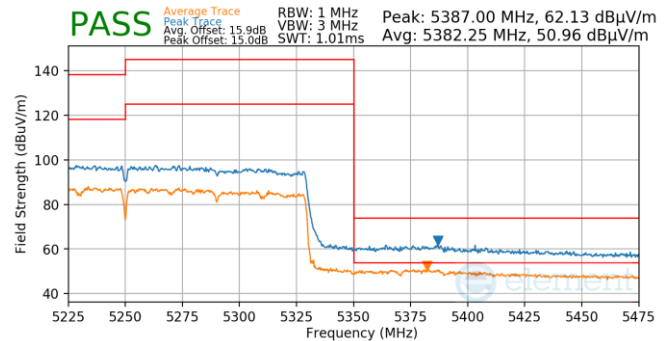

Plot 7-1231. Antenna 4a (Pk & Avg, Ch.50, 802.11ax(SU), MCS4)

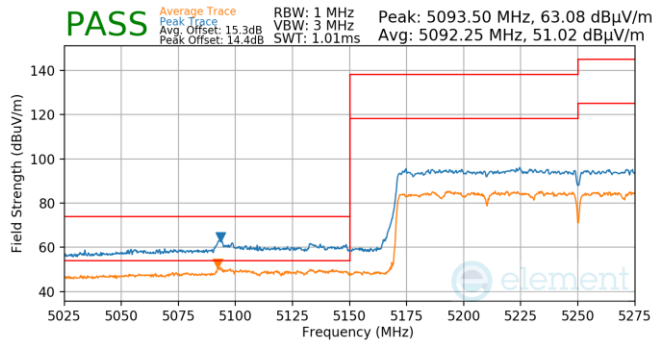


Plot 7-1228. Antenna 4a (Pk & Avg, Ch.50, 802.11ax(SU), MCS4)

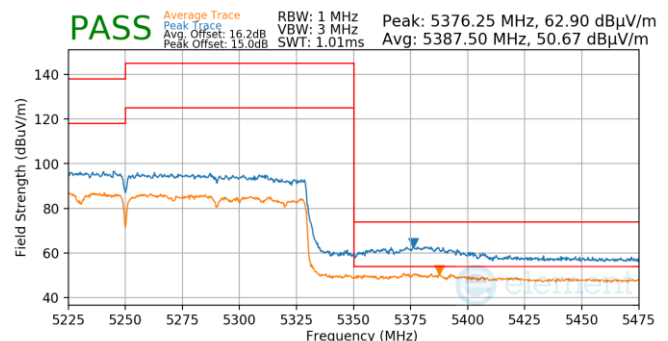


Plot 7-1232. Antenna 4a (Pk & Avg, Ch.50, 802.11ax(SU), MCS11)


FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-19.BCG	Test Dates: 05/30/2022-09/30/2022	EUT Type: Tablet Device	Page 352 of 365

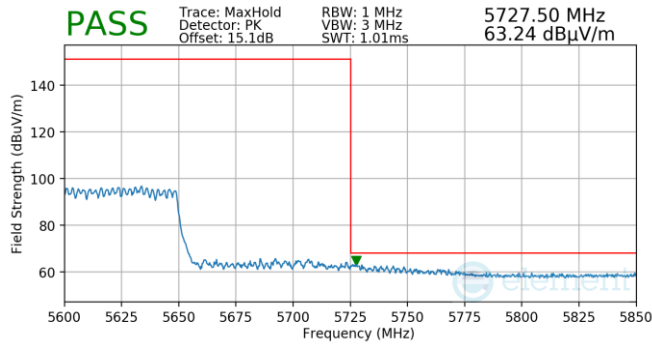

Plot 7-1233. (FCC Only) Antenna 4a (Pk & Avg, Ch.114, 802.11ax(SU), MCS2)

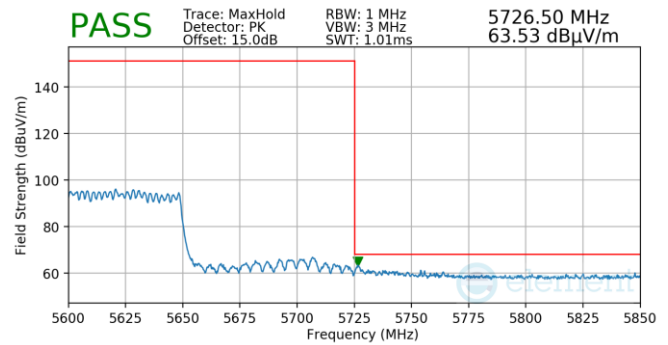

Plot 7-1235. Antenna 4a (FCC Only) (Pk & Avg. CH. 114, 802.11ax(SU), MCS11)

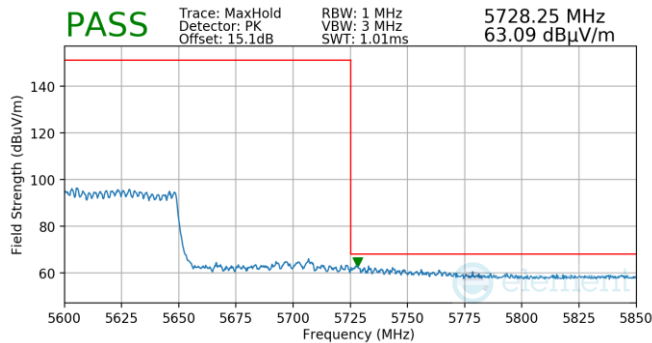

Plot 7-1234. Antenna 4a (FCC Only) (Pk & Avg. CH. 114, 802.11ax(SU), MCS4)

FCC ID: BCGA2764 IC: 579C-A2764	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-19.BCG	Test Dates: 05/30/2022-09/30/2022	EUT Type: Tablet Device	Page 353 of 365

V 10.5 12/15/2021

7.7 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-216 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-216. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

7. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
8. RBW = 120kHz (for emissions from 30MHz – 1GHz)
9. VBW = 300kHz
10. Detector = quasi-peak
11. Sweep time = auto couple
12. Trace mode = max hold
13. Trace was allowed to stabilize

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-19.BCG	Test Dates: 05/30/2022-09/30/2022	EUT Type: Tablet Device	Page 354 of 365

V 10.5 12/15/2021

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

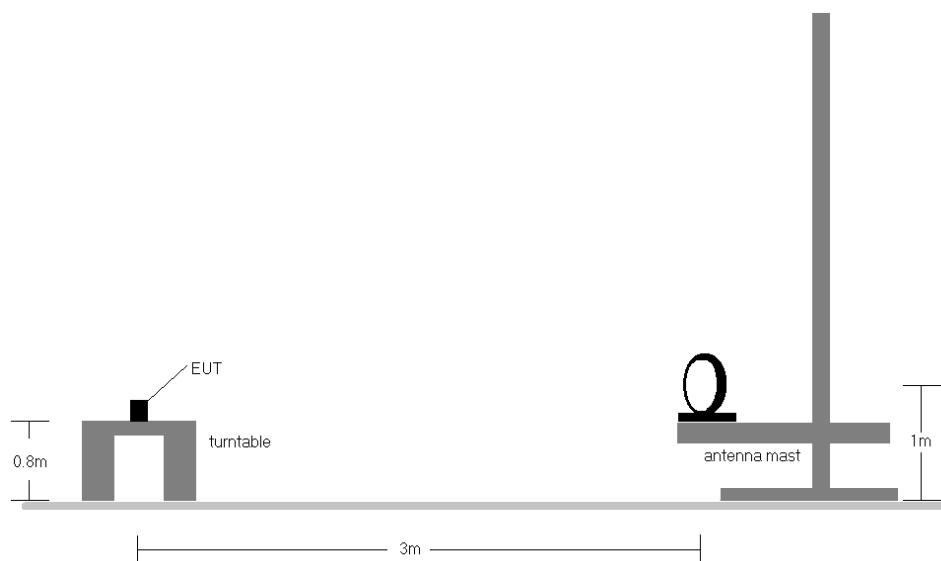


Figure 7-6. Radiated Test Setup < 30MHz

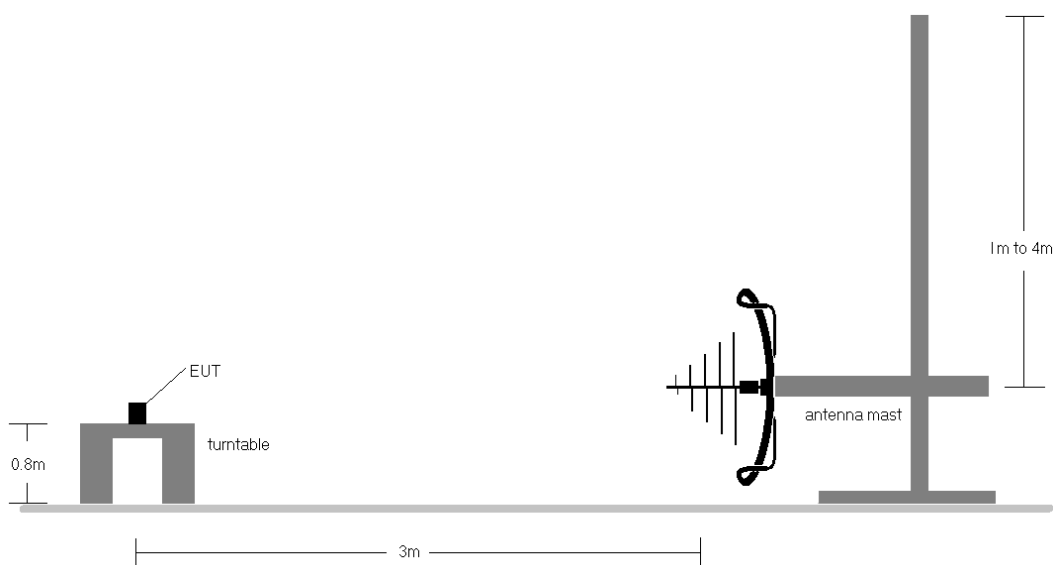


Figure 7-7. Radiated Test Setup < 1GHz

FCC ID: BCGA2764 IC: 579C-A2764	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090028-19.BCG	Test Dates: 05/30/2022-09/30/2022	EUT Type: Tablet Device	Page 355 of 365

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-216.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
10. All antenna configurations were investigated and only the worst case is reported.
11. The unit was tested with all possible modes and only the highest emission is reported.

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level}_{[dBm]} + 107 + \text{AFCL}_{[dB/m]}$
- $\text{AFCL}_{[dB/m]} = \text{Antenna Factor}_{[dB/m]} + \text{Cable Loss}_{[dB]} - \text{Preamp Gain}_{[dB]}$
- $\text{Margin}_{[dB]} = \text{Field Strength Level}_{[dB\mu V/m]} - \text{Limit}_{[dB\mu V/m]}$

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-19.BCG	Test Dates: 05/30/2022-09/30/2022	EUT Type: Tablet Device	Page 356 of 365

V 10.5 12/15/2021

CDD/SDM Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

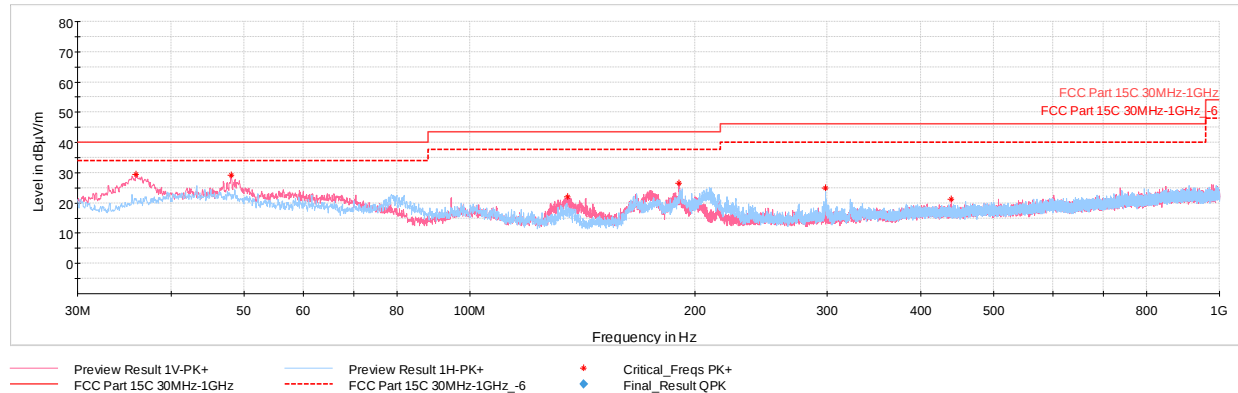


Plot 7-1236. Radiated Spurious Emissions below 1GHz SDM, 802.11n, Ch.48 with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
35.92	Max-Peak	V	100	25	-58.99	-18.46	29.55	40.00	-10.45
48.09	Max-Peak	V	100	20	-62.37	-15.44	29.19	40.00	-10.81
135.20	Max-Peak	V	100	225	-63.72	-21.22	22.06	43.52	-21.46
190.20	Max-Peak	V	100	76	-62.02	-18.44	26.54	43.52	-16.98
298.01	Max-Peak	H	100	130	-66.76	-15.41	24.83	46.02	-21.19
439.24	Max-Peak	V	200	318	-73.92	-11.94	21.14	46.02	-24.88

Table 7-217. Radiated Spurious Emissions below 1GHz, 802.11n, Ch.48 with AC/DC Adapter

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-19.BCG	Test Dates: 05/30/2022-09/30/2022	EUT Type: Tablet Device	Page 357 of 365

V 10.5 12/15/2021

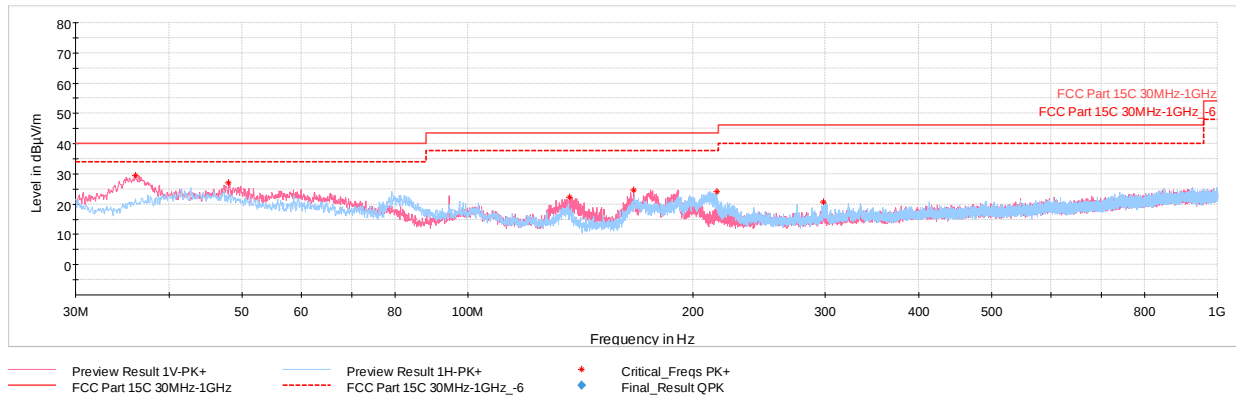

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
36.06	Max-Peak	V	100	289	-59.06	-18.44	29.50	40.00	-10.50
48.04	Max-Peak	V	100	24	-64.44	-15.44	27.12	40.00	-12.88
136.85	Max-Peak	V	100	358	-63.11	-21.61	22.28	43.52	-21.24
166.58	Max-Peak	V	100	46	-62.17	-20.21	24.62	43.52	-18.90
214.83	Max-Peak	H	100	175	-64.95	-17.88	24.17	43.52	-19.35
298.45	Max-Peak	H	100	138	-70.81	-15.47	20.72	46.02	-25.30

Table 7-218. Radiated Spurious Emissions below 1GHz, 802.11ax (SU), Ch.48 with AC/DC Adapter

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-19.BCG	Test Dates: 05/30/2022-09/30/2022	EUT Type: Tablet Device	Page 358 of 365

V 10.5 12/15/2021

7.8 AC Line-Conducted Emissions Measurement

§15.407; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-219. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-19.BCG	Test Dates: 05/30/2022-09/30/2022	EUT Type: Tablet Device	Page 359 of 365

V 10.5 12/15/2021

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

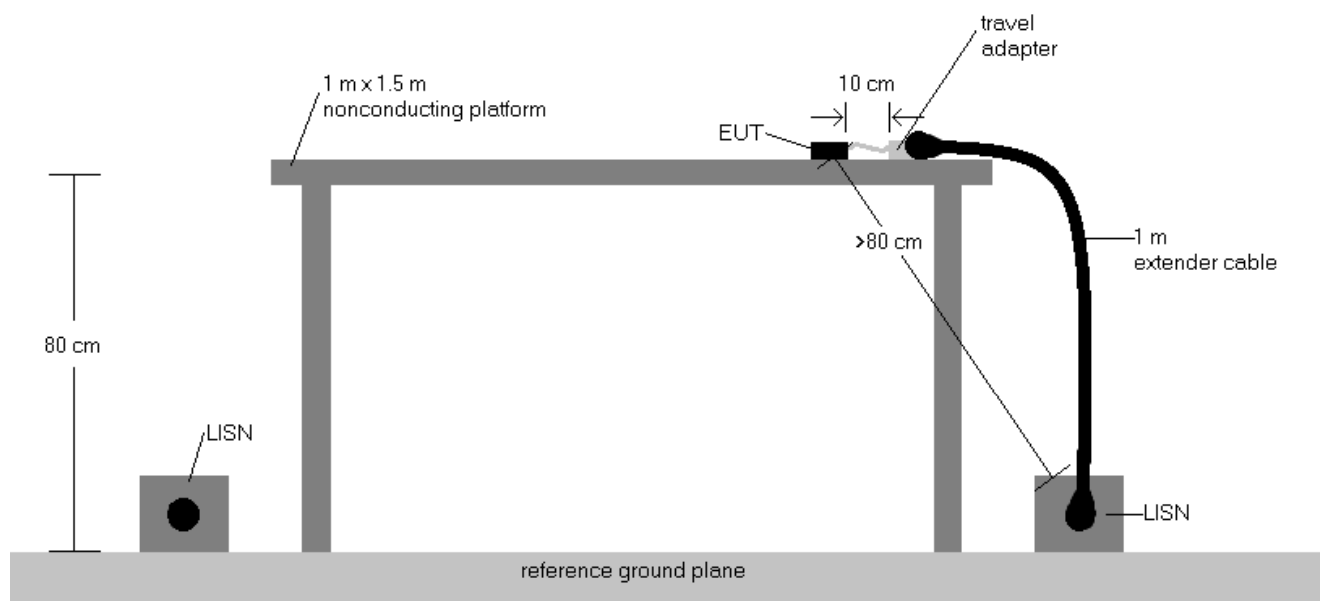



Figure 7-8. Test Instrument & Measurement Setup

Test Notes

- All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
- Both configurations below were investigated, and the worst case has been reported.
 - EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - EUT powered by host PC via USB-C cable with wire charger
- The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
- $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
- $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
- $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
- Traces shown in plots are made using quasi-peak and average detectors.
- Deviations to the Specifications: None.
- The unit was tested with all possible modes and only the highest emission is reported.

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-19.BCG	Test Dates: 05/30/2022-09/30/2022	EUT Type: Tablet Device	Page 360 of 365

V 10.5 12/15/2021

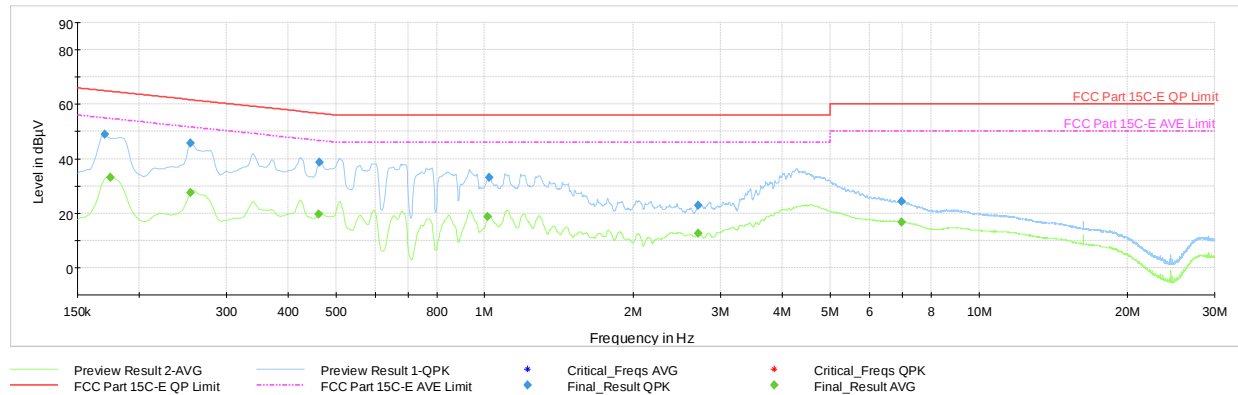

Plot 7-1238. AC Line Conducted Plot with 802.11n SDM – Ch.36 (L1), with AC/DC adapter


Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.170	FINAL	49.1	—	64.95	-15.86	L1	GND
0.175	FINAL	—	33.16	54.73	-21.58	L1	GND
0.254	FINAL	—	27.54	51.64	-24.10	L1	GND
0.254	FINAL	45.6	—	61.64	-16.02	L1	GND
0.461	FINAL	—	19.61	46.68	-27.08	L1	GND
0.463	FINAL	38.8	—	56.64	-17.88	L1	GND
1.014	FINAL	—	18.71	46.00	-27.29	L1	GND
1.021	FINAL	33.2	—	56.00	-22.82	L1	GND
2.704	FINAL	22.9	—	56.00	-33.14	L1	GND
2.704	FINAL	—	12.54	46.00	-33.46	L1	GND
6.970	FINAL	24.2	—	60.00	-35.81	L1	GND
6.972	FINAL	—	16.80	50.00	-33.20	L1	GND

Table 7-220. AC Line Conducted Data with 802.11n – Ch.36 (L1) with AC/DC adapter

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-19.BCG	Test Dates: 05/30/2022-09/30/2022	EUT Type: Tablet Device	Page 361 of 365

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

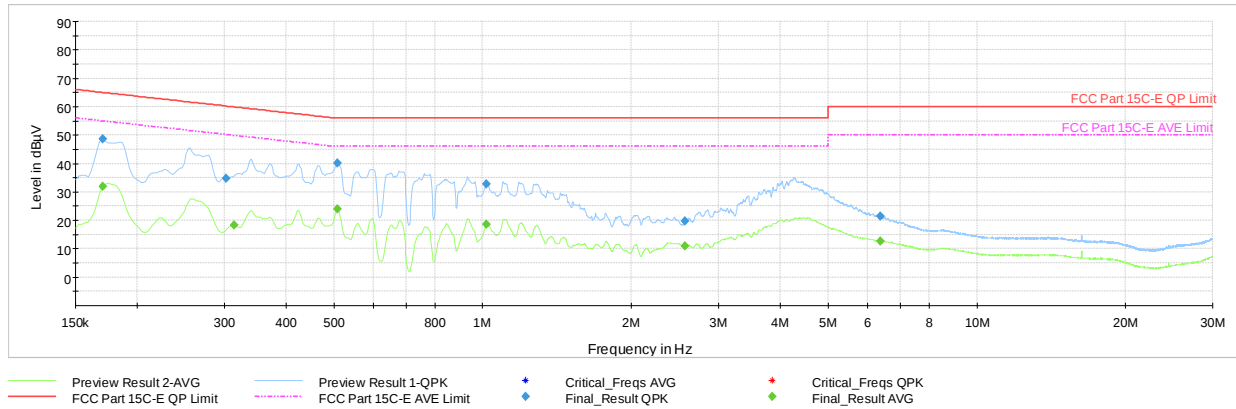


Plot 7-1239. AC Line Conducted Plot with 802.11n SDM – Ch.36 (N), with AC/DC adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.170	FINAL	—	32.07	54.95	-22.88	N	GND
0.170	FINAL	48.7	—	64.95	-16.27	N	GND
0.303	FINAL	34.7	—	60.16	-25.46	N	GND
0.314	FINAL	—	18.37	49.86	-31.48	N	GND
0.508	FINAL	40.0	—	56.00	-15.97	N	GND
0.508	FINAL	—	24.04	46.00	-21.96	N	GND
1.016	FINAL	—	18.72	46.00	-27.28	N	GND
1.019	FINAL	32.8	—	56.00	-23.19	N	GND
2.564	FINAL	19.7	—	56.00	-36.28	N	GND
2.564	FINAL	—	11.06	46.00	-34.94	N	GND
6.383	FINAL	—	12.67	50.00	-37.33	N	GND
6.383	FINAL	21.5	—	60.00	-38.52	N	GND

Table 7-221. AC Line Conducted Data with 802.11n – Ch.36 (N), with AC/DC adapter

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-19.BCG	Test Dates: 05/30/2022-09/30/2022	EUT Type: Tablet Device	Page 362 of 365

V 10.5 12/15/2021

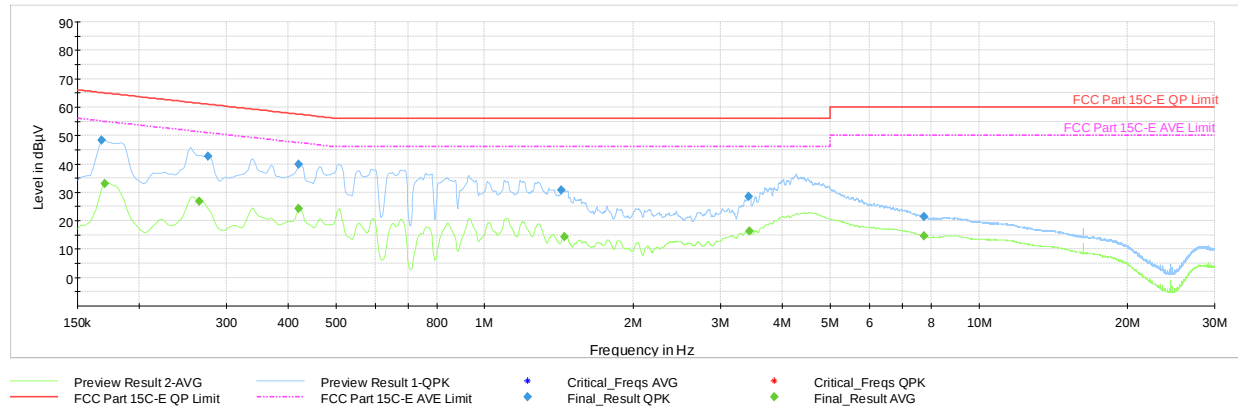

Plot 7-1240. AC Line Conducted Plot with 802.11ax(SU) SDM – Ch.48 (L1), with AC/DC adapter


Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.168	FINAL	48.4	—	65.06	-16.68	L1	GND
0.170	FINAL	—	32.92	54.95	-22.03	L1	GND
0.265	FINAL	—	26.94	51.28	-24.34	L1	GND
0.276	FINAL	42.8	—	60.94	-18.18	L1	GND
0.420	FINAL	—	24.22	47.45	-23.23	L1	GND
0.420	FINAL	39.7	—	57.45	-17.73	L1	GND
1.430	FINAL	30.8	—	56.00	-25.25	L1	GND
1.448	FINAL	—	14.40	46.00	-31.60	L1	GND
3.424	FINAL	28.7	—	56.00	-27.34	L1	GND
3.433	FINAL	—	16.31	46.00	-29.69	L1	GND
7.746	FINAL	21.4	—	60.00	-38.57	L1	GND
7.748	FINAL	—	14.59	50.00	-35.41	L1	GND

Table 7-222. AC Line Conducted Data with 802.11ax(SU) – Ch.48 (L1) with AC/DC adapter

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-19.BCG	Test Dates: 05/30/2022-09/30/2022	EUT Type: Tablet Device	Page 363 of 365

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

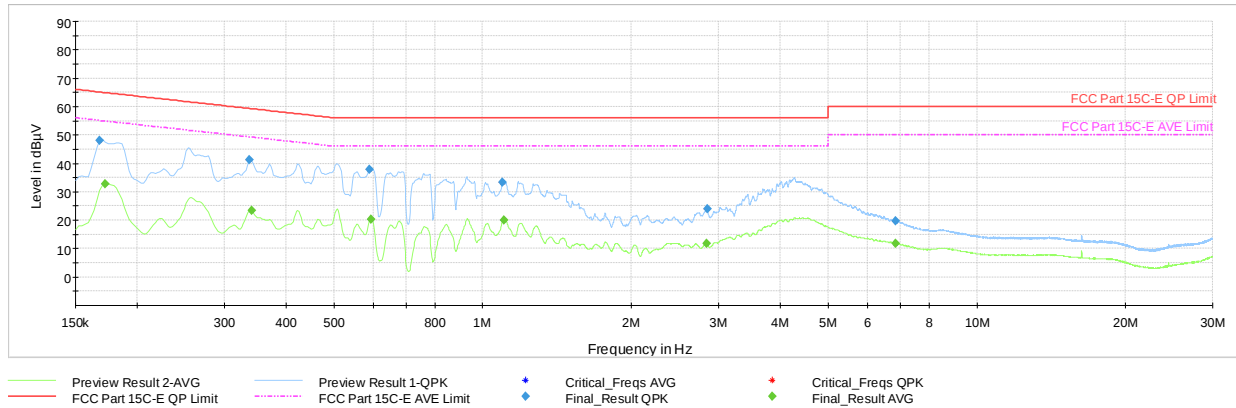

Plot 7-1241. AC Line Conducted Plot with 802.11ax(SU) SDM – Ch.48 (N), with AC/DC adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.168	FINAL	48.1	—	65.06	-16.97	N	GND
0.173	FINAL	—	32.90	54.84	-21.94	N	GND
0.337	FINAL	41.4	—	59.28	-17.89	N	GND
0.341	FINAL	—	23.50	49.17	-25.68	N	GND
0.591	FINAL	37.9	—	56.00	-18.09	N	GND
0.593	FINAL	—	20.34	46.00	-25.66	N	GND
1.095	FINAL	33.4	—	56.00	-22.64	N	GND
1.104	FINAL	—	20.08	46.00	-25.92	N	GND
2.837	FINAL	—	11.71	46.00	-34.29	N	GND
2.843	FINAL	23.9	—	56.00	-32.09	N	GND
6.844	FINAL	—	11.88	50.00	-38.12	N	GND
6.846	FINAL	19.7	—	60.00	-40.29	N	GND

Table 7-223. AC Line Conducted Data with 802.11ax(SU) SDM – Ch.48 (N), with AC/DC adapter

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-19.BCG	Test Dates: 05/30/2022-09/30/2022	EUT Type: Tablet Device	Page 364 of 365

V 10.5 12/15/2021

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA2764** and **IC: 579C-A2764** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-19.BCG	Test Dates: 05/30/2022-09/30/2022	EUT Type: Tablet Device	Page 365 of 365

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.